



# FCC RADIO TEST REPORT

**FCC ID** : B94HNC09CTKR  
**Equipment** : Convertible PC  
**Brand Name** : HP  
**Model Name** : HSN-C09C  
**Applicant** : HP Inc.  
3390 East Harmony Road, Fort Collins,  
Colorado, United States 80528  
**Standard** : FCC 47 CFR Part 2, and 90(S)

The product was received on Aug. 21, 2020 and testing was started from Nov. 13, 2020 and completed on Nov. 20, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

*Louis Wu*

Approved by: Louis Wu

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**  
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

History of this test report..... 3

Summary of Test Result..... 4

**1 General Description ..... 5**

    1.1 Feature of Equipment Under Test..... 5

    1.2 Modification of EUT ..... 6

    1.3 Testing Site..... 7

    1.4 Applied Standards ..... 7

**2 Test Configuration of Equipment Under Test ..... 8**

    2.1 Test Mode..... 8

    2.2 Connection Diagram of Test System ..... 8

    2.3 Support Unit used in test configuration and system ..... 9

    2.4 Frequency List of Low/Middle/High Channels..... 9

**3 Radiated Test Items ..... 10**

    3.1 Field Strength of Spurious Radiation Measurement ..... 10

**4 List of Measuring Equipment..... 13**

**5 Uncertainty of Evaluation ..... 14**

**Appendix A. Test Results of Radiated Test**





### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	§2.1046 §90.635	Conducted Output Power and Effective Radiated Power	-	See Note
-	-	Peak-to-Average Ratio	-	See Note
-	§2.1049 §90.209	Occupied Bandwidth and 26dB Bandwidth	-	See Note
-	§2.1051 §90.691	Emission masks – In-band emissions	-	See Note
-	§2.1051 §90.691	Emission masks – Out of band emissions	-	See Note
-	§2.1055 §90.213	Frequency Stability for Temperature & Voltage	-	See Note
3.1	§2.1053 §90.691	Field Strength of Spurious Radiation	Pass	Under limit 28.33 dB at 2490.000 MHz

**Note:** The module (Model: T99W175) makes no difference after verifying output power and Radiated Spurious Emission worse case (RSE verify detail test channel please refer to section 2.4), this report reuses test data from the module report.

<b>Declaration of Conformity:</b>
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
<b>Comments and Explanations:</b>
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: Wii Chang**

**Report Producer: Tina Chuang**



# 1 General Description

## 1.1 Feature of Equipment Under Test

WCDMA/LTE/5G NR, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, and GNSS.

Product Specification subjective to this standard	
<b>WWAN Module</b>	Brand Name: FOXCONN Model Name: T99W175
<b>Antenna Type</b>	WWAN <Ant. 1>: PIFA Antenna <Ant. 2>: PIFA Antenna (Rx Only) <Ant. 3>: Couple Antenna <Ant. 4>: Couple Antenna (Rx Only) WLAN <Ant. 1>: Couple Antenna <Ant. 2>: Couple Antenna Bluetooth: Couple Antenna GPS/Glonass/BDS/Galileo: PIFA Antenna

WWAN Antenna Information_NB Mode			
Antenna Part Number	Manufacture	Antenna Type	Peak Gain (dBi)
Tx1 Main Antenna 260-24315 (DC33002FX20)	HONG-BO	PIFA	824-849MHz -5.33 dBi (peak)
			880-915MHz -5.19 dBi (peak)
			1710-1785MHz -3.50 dBi (peak)
			1850-1910MHz -1.81 dBi (peak)
			1920-1980MHz -0.23 dBi (peak)
			704-716MHz -5.56 dBi (peak)
			746-756MHz -3.93 dBi (peak)
			777-787MHz -5.35 dBi (peak)
			832-862MHz -4.85 dBi (peak)
			1710-1755MHz -4.61 dBi (peak)
			2500-2570MHz -1.34 dBi (peak)
			2570-2620MHz -3.21 dBi (peak)
			2300-2400MHz 0.40 dBi (peak)
Rx2(Aux) Antenna 260-24315 (DC33002FX20)	HONG-BO	PIFA	869-894MHz -5.76 dBi (peak)
			925-960MHz -6.32 dBi (peak)
			1805-1880MHz -0.89 dBi (peak)
			1930-1990MHz -2.70 dBi (peak)
			2110-2170MHz -0.66 dBi (peak)
			734-746MHz -2.85 dBi (peak)
			746-756MHz -2.74 dBi (peak)
			791-821MHz -2.78 dBi (peak)
			2132-2155MHz -0.85 dBi (peak)
			2620-2690MHz -7.89 dBi (peak)
			2570-2620MHz -5.26 dBi (peak)
			2300-2400MHz -4.47 dBi (peak)



WWAN Antenna Information_TB Mode			
Antenna Part Number	Manufacture	Antenna Type	Peak Gain loss (dBi)
Tx1 Main Antenna 260-24315 (DC33002FX20)	HONG-BO	PIFA	824-849MHz -4.92 dBi (peak)
			880-915MHz -5.52 dBi (peak)
			1710-1785MHz -0.09 dBi (peak)
			1850-1910MHz -0.45 dBi (peak)
			1920-1980MHz -0.17 dBi (peak)
			704-716MHz -8.11 dBi (peak)
			746-756MHz -7.17 dBi (peak)
			777-787MHz -6.54 dBi (peak)
			832-862MHz -4.92 dBi (peak)
			1710-1755MHz -0.31 dBi (peak)
			2500-2570MHz -3.24dBi (peak)
			2570-2620MHz -3.24 dBi (peak)
			2300-2400MHz -0.58 dBi (peak)
			Rx2(Aux) Antenna 260-24315 (DC33002FX20)
925-960MHz -11.41 dBi (peak)			
1805-1880MHz -1.34 dBi (peak)			
1930-1990MHz -0.94 dBi (peak)			
2110-2170MHz -0.26 dBi (peak)			
734-746MHz -8.16 dBi (peak)			
746-756MHz -6.21 dBi (peak)			
791-821MH -3.36 dBi (peak)			
2132-2155MHz -2.31 dBi (peak)			
2620-2690MHz -7.03 dBi (peak)			
2570-2620MHz -5.03 dBi (peak)			
2300-2400MHz -1.65 dBi dBi (peak)			

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

### 1.2 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.3 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
<b>Test Site No.</b>	<b>Sporton Site No.</b> 03CH11-HY
<b>Test Engineer</b>	Bill Chang, Fu Chen, Troye Hsieh
<b>Temperature</b>	20.1~26.1°C
<b>Relative Humidity</b>	49.6~69.9%

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW0007

### 1.4 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR Part 2, 90
- ♦ ANSI / TIA-603-E
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ Interim Guidance for Equipment Authorization of Devices with Channel Bandwidths Combined Across Two Contiguous Service Rule Allocations OET/Lab/EACB, June 6, 2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.

## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode


During all testing, EUT is in link mode with base station emulator at maximum power level.

For radiated measurement, pre-scanned in Tablet Type (three orthogonal panels, X, Y, Z) and Notebook Type (45 Degrees, 90 Degrees). The worst cases (Notebook Type in 90 Degrees) were recorded in this report.

Frequency range investigated for radiated emission is 30 MHz to 9000 MHz.

Conducted Test Cases	Band	Bandwidth (MHz)						Modulation				RB #			Test Channel			
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H	
Radiated Spurious Emission	26		v		v	v	-	v					v			v	v	v
Remark	<ol style="list-style-type: none"> <li>The mark "v" means that this configuration is chosen for testing</li> <li>The mark "-" means that this bandwidth is not supported.</li> <li>LTE Band26 transmit frequency for part22 rule is 824MHz-849MHz, for part90 rule is 814MHz-824MHz. ERP over 15MHz bandwidth complies the ERP limit line of part22 rule, therefore ERP of the partial frequency spectrum which falls within part 22 also complies.</li> <li>All the radiated test cases were performed with Adapter 1.</li> </ol>																	

### 2.2 Connection Diagram of Test System

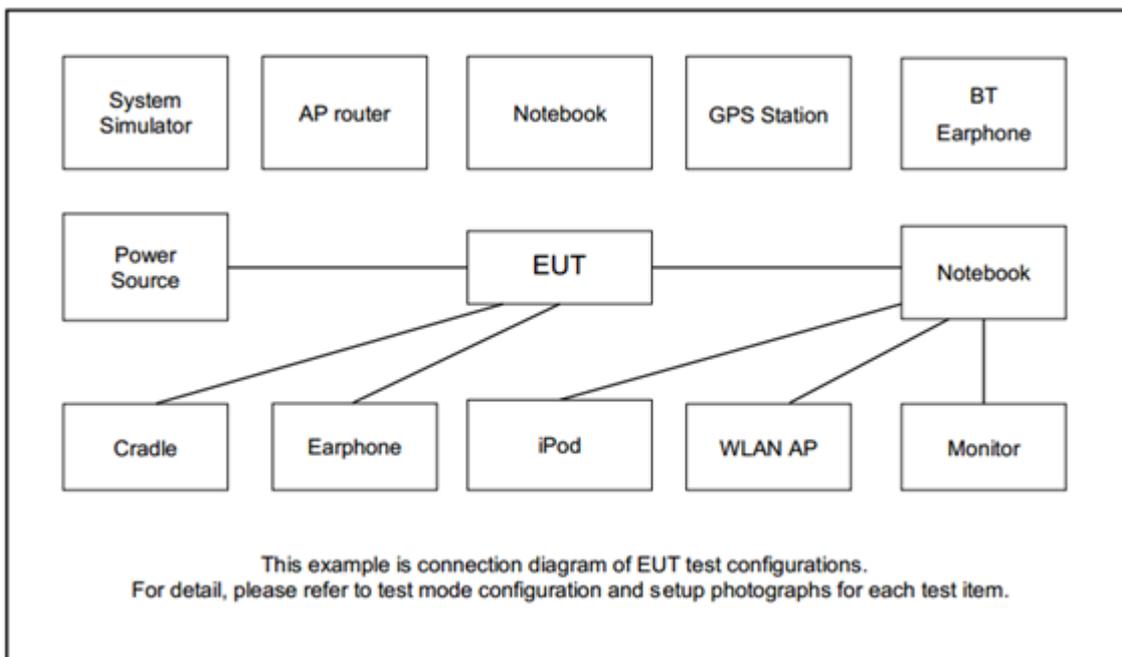



### 2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A
2.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m

### 2.4 Frequency List of Low/Middle/High Channels

LTE Band 26 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
15	Channel	26765	-	-
	Frequency	821.5	-	-
10	Channel	-	26740	-
	Frequency	-	819	-
3	Channel	26705	26740	26775
	Frequency	815.5	819	822.5



### 3 Radiated Test Items

#### 3.1 Field Strength of Spurious Radiation Measurement

##### 3.1.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log_{10}(P[\text{Watts}])$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

##### 3.1.2 Test Procedures


1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. For testing below 1GHz, make the measurement with the spectrum analyzer's RBW = 100 kHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
6. For testing above 1GHz, make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11.  $\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$
12.  $\text{ERP (dBm)} = \text{EIRP} - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from  $43 + 10 \log(P)$  dB below the transmitter power P(Watts)

### 3.1.3 Test Setup


For radiated test below 30MHz

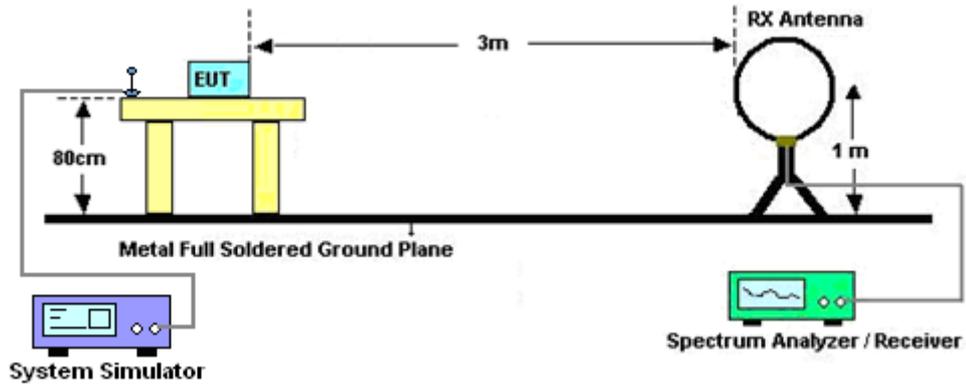

For radiated test from 30MHz to 1GHz

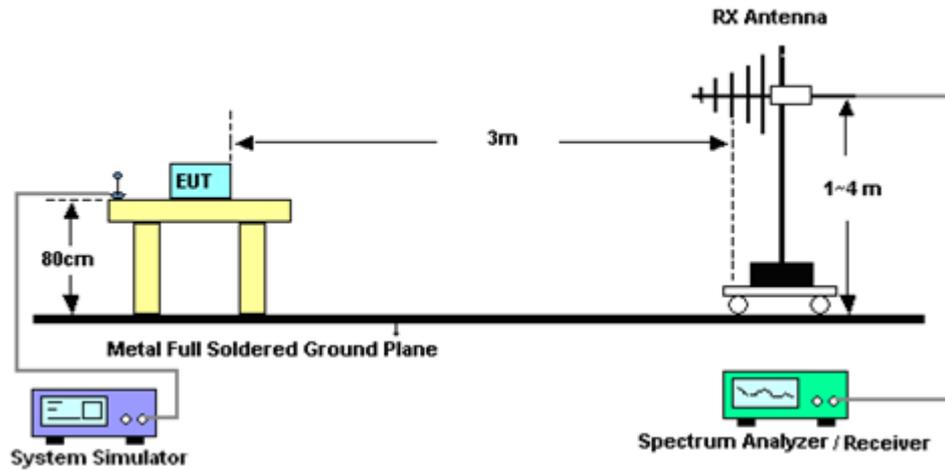

For radiated test above 1GHz

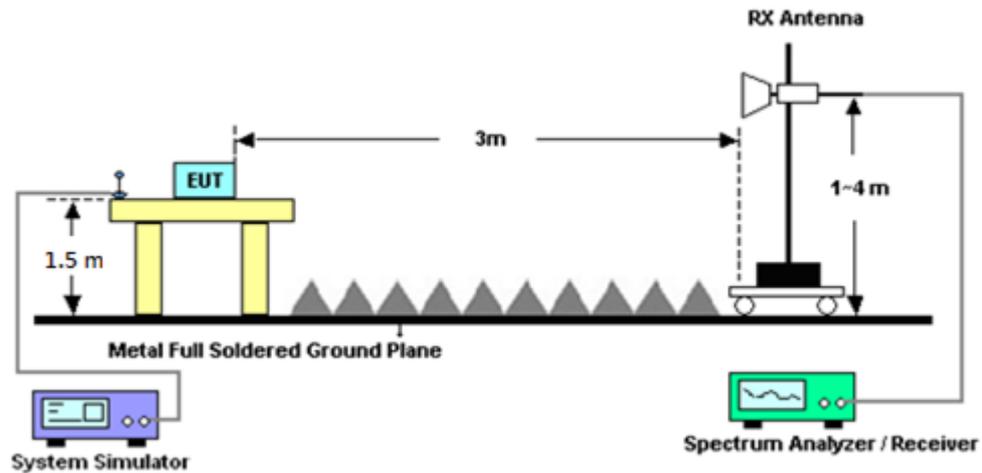

### 3.1.4 Test Result of Field Strength of Spurious Radiated

Please refer to Appendix A.

**Note:**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



## 4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 03, 2019	Nov. 13, 2020~ Nov. 20, 2020	Dec. 02, 2020	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 11, 2020	Nov. 13, 2020~ Nov. 20, 2020	Oct. 10, 2021	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBEC K	BBHA 9120 D	9120D-132 6	1GHz~18GHz	Nov. 03, 2020	Nov. 13, 2020~ Nov. 20, 2020	Nov. 02, 2021	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jul. 14, 2020	Nov. 13, 2020~ Nov. 20, 2020	Jul. 13, 2021	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY532700 80	1GHz~26.5GHz	Nov. 12, 2020	Nov. 13, 2020~ Nov. 20, 2020	Nov. 11, 2021	Radiation (03CH11-HY)
Preamplifier	Jet-Power	JPA0118-55-30 3	171000180 0055007	1GHz~18GHz	Mar. 31, 2020	Nov. 13, 2020~ Nov. 20, 2020	Mar. 30, 2021	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY542004 86	10Hz~44GHz	Oct. 23, 2020	Nov. 13, 2020~ Nov. 20, 2020	Oct. 22, 2021	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-1080 -1200-15000-6 0SS	SN2	1.2GHz High Pass Filter	Sep. 14, 2020	Nov. 13, 2020~ Nov. 20, 2020	Sep. 13, 2021	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 0SS	SN3	3GHz High Pass Filter	Sep. 14, 2020	Nov. 13, 2020~ Nov. 20, 2020	Sep. 13, 2021	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-15 30-8000-40SS	SN11	1.53GHz Low Pass Filter	Sep. 14, 2020	Nov. 13, 2020~ Nov. 20, 2020	Sep. 13, 2021	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz~40GHz	Mar. 12, 2020	Nov. 13, 2020~ Nov. 20, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	30MHz~18GHz	Mar. 12, 2020	Nov. 13, 2020~ Nov. 20, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30MHz~40GHz	Mar. 12, 2020	Nov. 13, 2020~ Nov. 20, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY11681/ 4PE	30MHz~18GHz	Mar. 12, 2020	Nov. 13, 2020~ Nov. 20, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Nov. 13, 2020~ Nov. 20, 2020	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Nov. 13, 2020~ Nov. 20, 2020	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Nov. 13, 2020~ Nov. 20, 2020	N/A	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D&00802 N1D01N-06	54682 & AT-N0603	30MHz~1GHz	N/A	Nov. 13, 2020~ Nov. 20, 2020	N/A	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBEC K	BBHA 9120 D	9120D-121 2	1GHz~18GHz	May 20, 2020	Nov. 13, 2020~ Nov. 20, 2020	May 19, 2021	Radiation (03CH11-HY)
Signal Generator	Anritsu	MG3694C	163401	0.1Hz~40GHz	Feb. 15, 2020	Nov. 13, 2020~ Nov. 20, 2020	Feb. 14, 2021	Radiation (03CH11-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.29
---	------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.32
---	------



## Appendix A. Test Results of Radiated Test

### LTE Band 26

LTE Band 26 / 3MHz / QPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1628	-59.36	-13	-46.36	-69.31	-66.27	0.52	9.58	H
	2442	-45.65	-13	-32.65	-59.42	-53.61	0.64	10.75	H
	3256	-59.05	-13	-46.05	-75.34	-68.02	0.75	11.87	H
									H
									H
	1628	-57.90	-13	-44.90	-67.66	-64.81	0.52	9.58	V
	2442	-41.46	-13	-28.46	-55.83	-49.42	0.64	10.75	V
	3256	-58.93	-13	-45.93	-75.36	-67.9	0.75	11.87	V
									V
									V
Middle	1660	-58.98	-13	-45.98	-69.22	-65.95	0.53	9.65	H
	2490	-44.63	-13	-31.63	-58.28	-52.62	0.65	10.79	H
	3320	-58.74	-13	-45.74	-75.15	-67.89	0.76	12.06	H
									H
									H
	1660	-55.31	-13	-42.31	-65.13	-62.28	0.53	9.65	V
	2490	-41.33	-13	-28.33	-55.45	-49.32	0.65	10.79	V
	3320	-58.97	-13	-45.97	-75.26	-68.12	0.76	12.06	V
									V
									V



Highest	1692	-59.37	-13	-46.37	-69.89	-66.41	0.53	9.72	H
	2538	-46.48	-13	-33.48	-60.2	-54.49	0.66	10.82	H
	3384	-58.88	-13	-45.88	-75.43	-68.21	0.77	12.25	H
									H
									H
	1692	-54.97	-13	-41.97	-64.85	-62.01	0.53	9.72	V
	2538	-44.51	-13	-31.51	-58.6	-52.52	0.66	10.82	V
	3384	-58.88	-13	-45.88	-75.02	-68.21	0.77	12.25	V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 26 / 10MHz / QPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1654	-59.04	-13	-46.04	-69.14	-66	0.53	9.64	H
	2481	-44.48	-13	-31.48	-58.17	-52.46	0.65	10.78	H
	3308	-58.84	-13	-45.84	-75.21	-67.96	0.76	12.02	H
									H
									H
	1654	-55.47	-13	-42.47	-65.28	-62.43	0.53	9.64	V
	2481	-44.43	-13	-31.43	-58.6	-52.41	0.65	10.78	V
	3308	-59.07	-13	-46.07	-75.38	-68.19	0.76	12.02	V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 26 / 15MHz / QPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1629	-59.24	-13	-46.24	-69.19	-66.15	0.52	9.58	H
	2444	-47.73	-13	-34.73	-61.5	-55.69	0.64	10.76	H
	3259	-59.01	-13	-46.01	-75.3	-67.99	0.75	11.88	H
									H
									H
	1629	-56.63	-13	-43.63	-66.39	-63.54	0.52	9.58	V
	2444	-43.79	-13	-30.79	-58.15	-51.75	0.64	10.76	V
	3259	-59.08	-13	-46.08	-75.5	-68.06	0.75	11.88	V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line

————THE END————