

FCC SAR Test Report

APPLICANT : Hewlett-Packard Company
EQUIPMENT : Tablet PC
BRAND NAME : hp
MODEL NAME : HSTNN-C78C
FCC ID : B94HNC78BWRXN
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2003

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Deputy Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
3. Guidance Standard	5
4. Equipment Under Test (EUT)	6
4.1 General Information	6
4.2 Maximum Tune-up Limit.....	7
5. Proximity Sensor Triggering Test.....	8
6. RF Exposure Limits.....	11
6.1 Uncontrolled Environment.....	11
6.2 Controlled Environment.....	11
7. Specific Absorption Rate (SAR).....	12
7.1 Introduction	12
7.2 SAR Definition.....	12
8. System Description and Setup	13
9. Measurement Procedures	14
9.1 Spatial Peak SAR Evaluation.....	14
9.2 Power Reference Measurement.....	15
9.3 Area Scan	15
9.4 Zoom Scan.....	16
9.5 Volume Scan Procedures.....	16
9.6 Power Drift Monitoring.....	16
10. Test Equipment List.....	17
11. System Verification	18
11.1 Tissue Verification	18
11.2 System Performance Check Results	19
12. RF Exposure Positions	19
12.1 SAR Testing for Tablet.....	19
13. Conducted RF Output Power (Unit: dBm).....	20
14. Antenna Location	25
15. SAR Test Results	27
15.1 Body SAR	27
15.2 Repeated SAR Measurement	28
16. Simultaneous Transmission Analysis.....	29
16.1 Body Exposure Conditions.....	30
16.2 SPLSR Evaluation and Analysis.....	32
17. Uncertainty Assessment	48
18. References.....	50
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA392719-17	Rev. 01	Initial issue of report	Jul. 29, 2014



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Hewlett-Packard Company, Tablet PC, HSTNN-C78C**, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary	
		Body 1g SAR (W/kg)	Simultaneous Transmission 1g SAR (W/kg)
PCB	GSM850	1.22	1.49
	GSM1900	1.12	
	WCDMA Band V	1.12	
	WCDMA Band IV	1.24	
	WCDMA Band II	1.32	
Date of Testing:		11/05/2013 ~ 07/12/2014	

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003.

2. Administration Data

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978

Applicant	
Company Name	Hewlett-Packard Company
Address	3000 Hanover Street, Palo Alto, California 94304, USA

Manufacturer	
Company Name	COMPAL ELECTRONICS, INC.
Address	No.581, Ruiguang Rd., Neihs District, Taipei City 11492, Taiwan (R.O.C.)

3. Guidance Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- FCC KDB 865664 D02 SAR Reporting v01r01
- FCC KDB 447498 D01 General RF Exposure Guidance v05r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r01
- FCC KDB 941225 D01 SAR test for 3G devices v02
- FCC KDB 941225 D02 HSPA and 1x Advanced v02r02
- FCC KDB 941225 D03 SAR Test Reduction GSM GPRS EDGE v01

4. Equipment Under Test (EUT)

4.1 General Information

Product Feature & Specification	
Equipment Name	Tablet PC
Brand Name	hp
Model Name	HSTNN-C78C
FCC ID	B94HNC78BWRXN
Integrated Module	WWAN Module: Band Name: Huawei Model Name: MU736 WLAN Module: Brand Name: Mitsumi Model Name: DWM-W095A
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	• GPRS/EGPRS • RMC 12.2Kbps • HSDPA • HSUPA • 802.11a/b/g/n HT20/HT40 • Bluetooth v2.1+EDR • Bluetooth v4.0-LE
EUT Stage	Identical Prototype
Remark: 1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description. 2. This EUT has another variant version with WWAN module removal, and WLAN/Bluetooth SAR assessment was addressed in the Sporton SAR report (report no. FA392719-16 Rev.01) for FCC ID: B94HNC78CBXN. The WLAN/Bluetooth module and the antenna is exactly identical between 2 versions, and the WLAN/Bluetooth antenna is >5cm away from WWAN antenna, the WLAN/Bluetooth SAR test results in the B94HNC78CBXN SAR report is representative of WLAN/Bluetooth SAR performance in this EUT and will be submitted in this application.	

**4.2 Maximum Tune-up Limit**

Mode	Burst average power (dBm)			
	GSM 850		GSM 1900	
Output Power Status	Full power mode	Reduced Power mode	Full power mode	Reduced Power mode
GPRS (GMSK, 1 Tx slot)	33.5	29.0	30.5	26.0
GPRS (GMSK, 2 Tx slots)	31.0	26.5	28.0	23.0
EDGE (8PSK, 1 Tx slot)	28.0	28.0	27.0	26.0
EDGE (8PSK, 2 Tx slots)	25.5	25.5	24.5	23.0
EDGE (8PSK, 3 Tx slot)	24.0	24.0	23.0	21.0
EDGE (8PSK, 4 Tx slots)	22.5	22.5	21.5	20.0

Mode	Average Power (dBm)					
	WCDMA Band V		WCDMA Band II		WCDMA Band IV	
Output Power Status	Full power mode	Reduced Power mode	Full power mode	Reduced Power mode	Full power mode	Reduced Power mode
RMC 12.2Kbps	24.5	19	24.5	17.5	24.5	18
HSDPA Subtest-1	24.5	19	24.5	17.5	24.5	18
HSUPA Subtest-5	24.5	19	24.5	17.5	24.5	18

5. Proximity Sensor Triggering Test

Proximity sensor power reduction


Exposure Position / wireless mode	Bottom Face(1)	Edge 1(1)	Edge 2	Edge 3	Edge 4
GSM850 GPRS (GMSK 1 Tx slot)	4.5 dB	4.5 dB	0 dB	0 dB	0 dB
GSM850 GPRS (GMSK 2 Tx slots)	4.5 dB	4.5 dB	0 dB	0 dB	0 dB
GSM850 EDGE (8PSK 1 Tx slot)	0.0 dB	0.0 dB	0 dB	0 dB	0 dB
GSM850 EDGE (8PSK 2 Tx slots)	0.0 dB	0.0 dB	0 dB	0 dB	0 dB
GSM850 EDGE (8PSK 3 Tx slots)	0.0 dB	0.0 dB	0 dB	0 dB	0 dB
GSM850 EDGE (8PSK 4 Tx slots)	0.0 dB	0.0 dB	0 dB	0 dB	0 dB
GSM1900 GPRS (GMSK 1 Tx slot)	4.5 dB	4.5 dB	0 dB	0 dB	0 dB
GSM1900 GPRS (GMSK 2 Tx slots)	5.0 dB	5.0 dB	0 dB	0 dB	0 dB
GSM1900 EDGE (8PSK 1 Tx slot)	1.0 dB	1.0 dB	0 dB	0 dB	0 dB
GSM1900 EDGE (8PSK 2 Tx slots)	1.5 dB	1.5 dB	0 dB	0 dB	0 dB
GSM1900 EDGE (8PSK 3 Tx slots)	2.0 dB	2.0 dB	0 dB	0 dB	0 dB
GSM1900 EDGE (8PSK 4 Tx slots)	1.5 dB	1.5 dB	0 dB	0 dB	0 dB
WCDMA Band V	5.5 dB	5.5 dB	0 dB	0 dB	0 dB
WCDMA Band IV	6.5 dB	6.5 dB	0 dB	0 dB	0 dB
WCDMA Band II	7.0 dB	7.0 dB	0 dB	0 dB	0 dB


Remark:

- ⁽¹⁾: Reduced maximum limit applied by activation of proximity sensor.

Power Measurement during Sensor Trigger distance testing

Band/Mode	Ch #	Measured power reduction (dBm)		Reduction Levels (dB)
		w/o power back-off	w/ power back-off	
GSM850 GPRS (GMSK 2 Tx slot)	189	30.62	26.34	4.28
GSM1900 GPRS (GMSK 2 Tx slot)	661	27.45	22.96	4.49
WCDMA Band V (RMC 12.2Kbps)	4182	24.10	18.83	5.27
WCDMA Band IV (RMC 12.2Kbps)	1413	23.82	17.91	5.91
WCDMA Band II (RMC 12.2Kbps)	9400	23.83	17.49	6.34

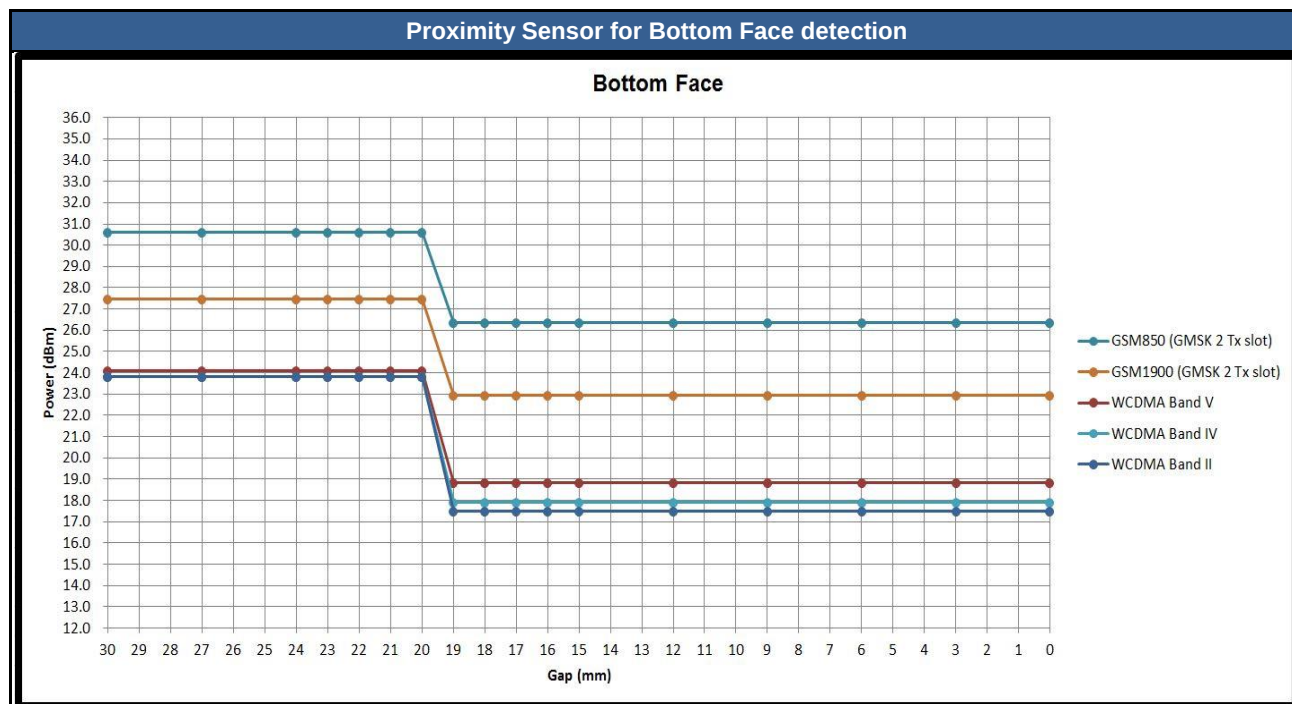

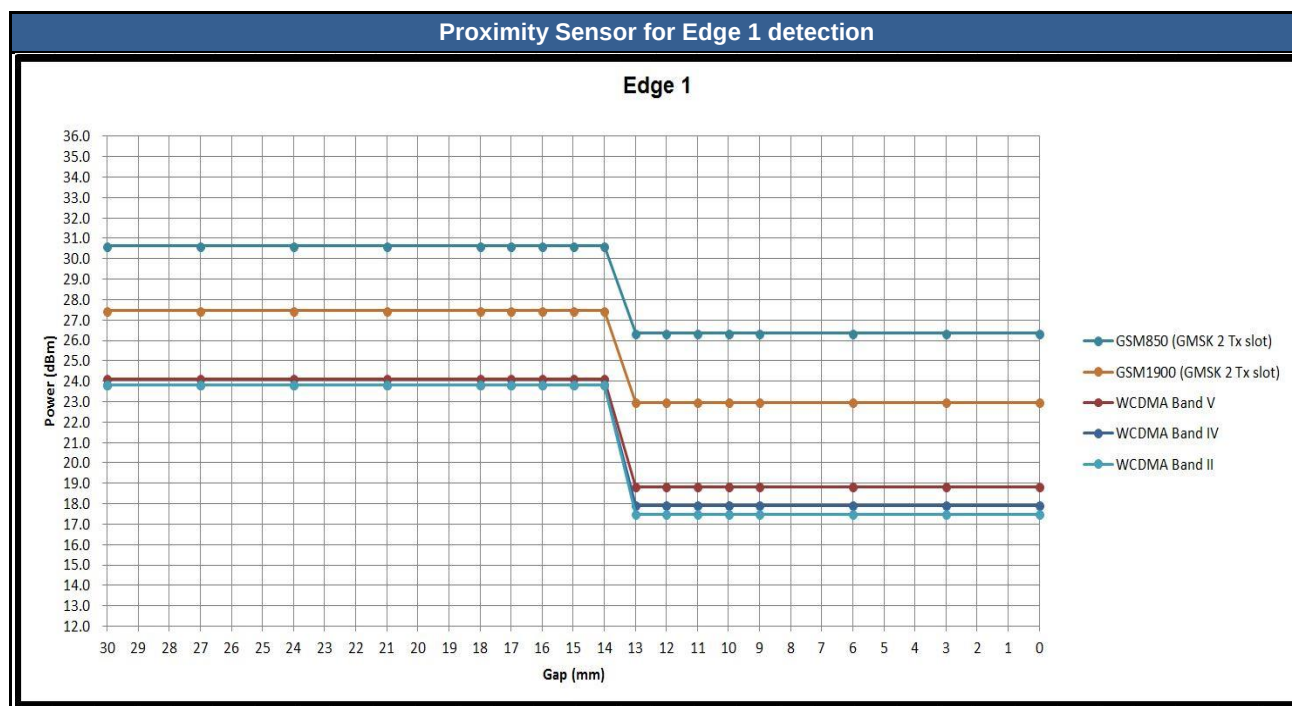

6. RF Exposure Limits

6.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

7. Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

8. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

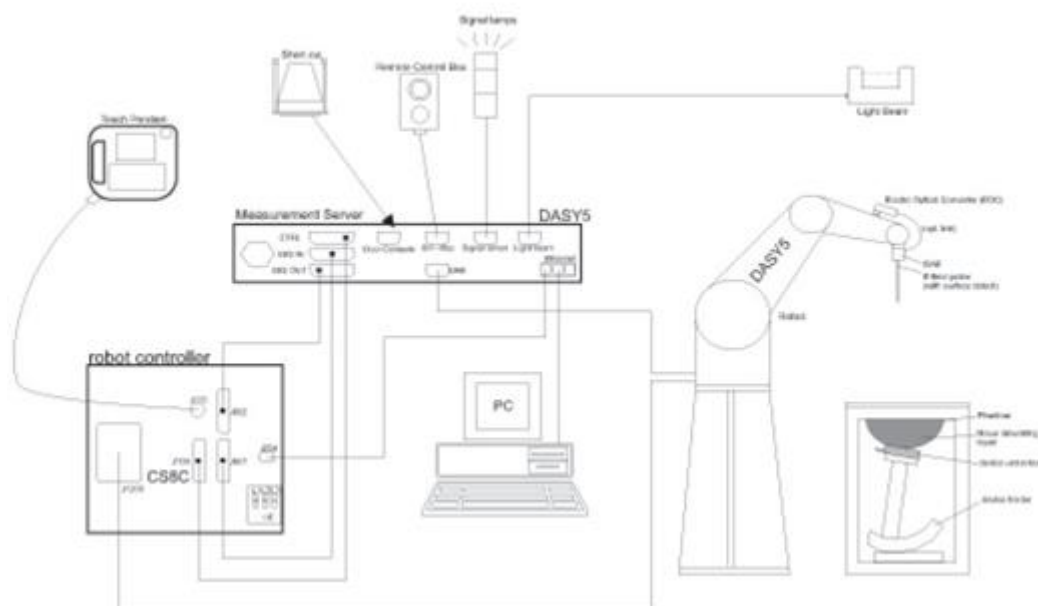

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



10. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	499	Mar. 18, 2013	Mar. 17, 2014
SPEAG	835MHz System Validation Kit	D835V2	499	Mar. 24, 2014	Mar. 23, 2015
SPEAG	1750MHz System Validation Kit	D1750V2	1068	Jun. 20, 2012	Jun. 19, 2014
SPEAG	1750MHz System Validation Kit	D1750V2	1068	Nov. 27, 2013	Nov. 26, 2014
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Mar. 20, 2013	Mar. 19, 2014
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Mar. 21, 2014	Mar. 20, 2015
SPEAG	Data Acquisition Electronics	DAE4	778	Aug. 21, 2013	Aug. 20, 2014
SPEAG	Data Acquisition Electronics	DAE4	1279	Jan. 28, 2013	Jan. 27, 2014
SPEAG	Data Acquisition Electronics	DAE4	913	Jan. 17, 2013	Jan. 16, 2014
SPEAG	Data Acquisition Electronics	DAE3	495	May. 19, 2014	May. 18, 2015
SPEAG	Dosimetric E-Field Probe	EX3DV4	3697	Oct. 15, 2013	Oct. 14, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3801	Jun. 20, 2013	Jun. 19, 2014
SPEAG	Dosimetric E-Field Probe	ES3DV3	3270	Sep. 24, 2013	Sep. 23, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3925	May. 22, 2014	May. 21, 2015
Wisewind	Thermometer	ETP-101	TM560	Oct. 22, 2013	Oct. 21, 2014
Wisewind	Thermometer	ETP-101	TM685	Oct. 22, 2013	Oct. 21, 2014
Wisewind	Thermometer	HTC-1	TM642	Oct. 22, 2013	Oct. 21, 2014
Wisewind	Thermometer	HTC-1	TM281	Oct. 22, 2013	Oct. 21, 2014
Agilent	Wireless Communication Test Set	E5515C	MY50264370	Apr. 29, 2013	Apr. 28, 2015
Agilent	Wireless Communication Test Set	E5515E	MY52112077	Apr. 28, 2012	Apr. 27, 2014
R&S	Radio communication Tester	CMW500	113998	Oct. 04, 2013	Oct. 03, 2014
SPEAG	Device Holder	N/A	N/A	NCR	NCR
R&S	Signal Generator	SMF 100A	101107	May. 27, 2013	May. 26, 2014
Agilent	Signal Generator	E4438C	MY49070755	Oct. 08, 2013	Oct. 07, 2014
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Jul. 23, 2013	Jul. 22, 2014
SPEAG	Dielectric Probe Kit	DAK-3.5	1138	Nov. 03, 2013	Nov. 02, 2014
Agilent	ENA Network Analyzer	E5071C	MY46316648	Feb. 07, 2013	Feb. 06, 2014
Agilent	ENA Network Analyzer	E5071C	MY46316648	Feb. 07, 2014	Feb. 06, 2015
Anritsu	Power Meter	ML2495A	1132003	Aug. 28, 2013	Aug. 27, 2014
Anritsu	Power Meter	ML2495A	1349001	Dec. 04, 2013	Dec. 03, 2014
Anritsu	Power Sensor	MA2411B	1126017	Aug. 27, 2013	Aug. 26, 2014
Anritsu	Power Sensor	MA2411B	1306099	Dec. 03, 2013	Dec. 02, 2014
R&S	Spectrum Analyzer	FSP 7	101131	Jul. 09, 2013	Jul. 08, 2014
R&S	Spectrum Analyzer	FSP 7	101131	Jul. 10, 2014	Jul. 09, 2015
Agilent	Dual Directional Coupler	778D	50422	Note 1	
Woken	Attenuator	WK0602-XX	N/A	Note 1	
PE	Attenuator	PE7005-10	N/A	Note 1	
PE	Attenuator	PE7005- 3	N/A	Note 1	
AR	Power Amplifier	5S1G4M2	0328767	Note 1	
Mini-Circuits	Power Amplifier	ZVE-3W	162601250	Note 1	
Mini-Circuits	Power Amplifier	ZVE-8G+	D120604	Note 1	
Mini-Circuits	Power Amplifier	ZHL-42W+	13440021344	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. Referring to KDB 865664 D01v01r03, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole D1750V2, SN: 1068 can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

11. System Verification

11.1 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
835	Body	22.3	0.963	54.541	0.97	55.20	-0.72	-1.19	±5	2013/11/13
835	Body	22.3	0.963	54.541	0.97	55.20	-0.72	-1.19	±5	2013/11/13
835	Body	22.5	0.963	54.557	0.97	55.20	-0.72	-1.16	±5	2014/7/11
1750	Body	22.6	1.510	52.005	1.52	53.30	-0.66	-2.43	±5	2013/11/5
1750	Body	22.4	1.546	51.742	1.52	53.30	1.71	-2.92	±5	2013/11/8
1750	Body	22.3	1.545	51.726	1.52	53.30	1.64	-2.95	±5	2013/11/13
1750	Body	22.7	1.510	52.098	1.52	53.30	-0.66	-2.26	±5	2014/7/12
1900	Body	22.6	1.534	51.986	1.52	53.30	0.92	-2.47	±5	2013/11/5
1900	Body	22.4	1.569	51.586	1.52	53.30	3.22	-3.22	±5	2013/11/8
1900	Body	22.6	1.534	51.604	1.52	53.30	0.92	-3.18	±5	2014/7/12

11.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured SAR (W/kg)	Targeted SAR (W/kg)	Normalized SAR (W/kg)	Deviation (%)
2013/11/13	835	Body	250	D835V2-499	3801	913	2.54	9.63	10.16	5.50
2013/11/13	835	Body	250	D835V2-499	3270	778	2.45	9.63	9.80	1.77
2014/7/11	835	Body	250	D835V2-499	3925	495	2.39	9.46	9.56	1.06
2013/11/5	1750	Body	250	D1750V2-1068	3697	1279	9.25	36.80	37.00	0.54
2013/11/8	1750	Body	250	D1750V2-1068	3697	1279	9.46	36.80	37.84	2.83
2013/11/13	1750	Body	250	D1750V2-1068	3801	913	9.78	36.80	39.12	6.30
2014/7/12	1750	Body	250	D1750V2-1068	3925	495	9.77	37.50	39.08	4.21
2013/11/5	1900	Body	250	D1900V2-5d041	3697	1279	9.49	40.80	37.96	-6.96
2013/11/8	1900	Body	250	D1900V2-5d041	3697	1279	9.70	40.80	38.80	-4.90
2014/7/12	1900	Body	250	D1900V2-5d041	3925	495	10.30	41.00	41.20	0.49

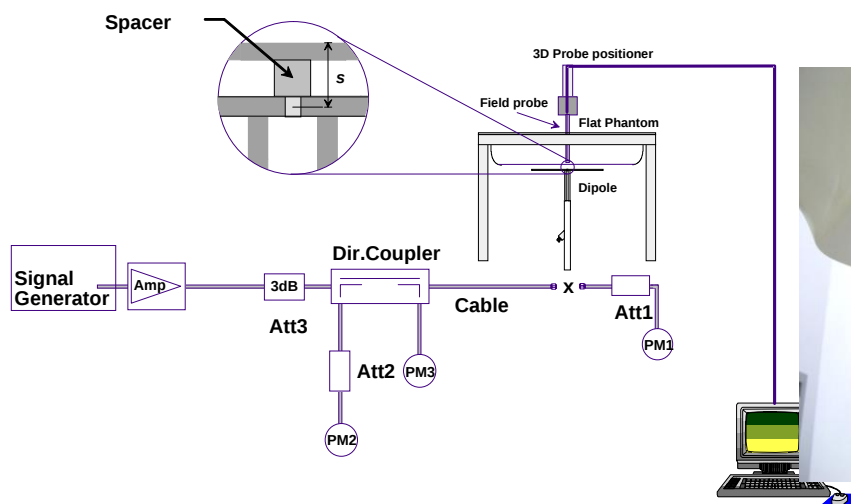


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

12. RF Exposure Positions

12.1 SAR Testing for Tablet

This device can be used also in full sized tablet exposure conditions, due to its size. Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR exclusion threshold in KDB 447498 D01v05r02 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

13. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

General Note:

1. Per KDB 447498 D01v05r02, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. For Body SAR testing was following KDB 941225 D03v01, the GPRS 2Tx slots modes was selected when EUT operating without power back-off, the GPRS 2Tx slots modes was selected when EUT operating with power back-off, according to the highest source-based time-averaged output power.

Maximum Average RF Power (Proximity Sensor Inactive)

Band GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GPRS (GMSK, 1 Tx slot)	32.90	32.89	32.91	33.50	23.90	23.89	23.91	24.50
GPRS (GMSK, 2 Tx slots)	30.70	30.62	30.61	31.00	24.70	24.62	24.61	25.00
EDGE (8PSK, 1 Tx slot)	26.99	26.89	26.84	28.00	17.99	17.89	17.84	19.00
EDGE (8PSK, 2 Tx slots)	24.56	24.41	24.39	25.50	18.56	18.41	18.39	19.50
EDGE (8PSK, 3 Tx slots)	23.01	22.88	22.88	24.00	18.75	18.62	18.62	19.74
EDGE (8PSK, 4 Tx slots)	21.43	21.45	21.33	22.50	18.43	18.45	18.33	19.50

Reduced Average RF Power (Proximity Sensor active)

Band GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GPRS (GMSK, 1 Tx slot)	28.98	28.89	28.95	29.00	19.98	19.89	19.95	20.00
GPRS (GMSK, 2 Tx slots)	26.40	26.34	26.30	26.50	20.40	20.34	20.30	20.50
EDGE (8PSK, 1 Tx slot)	26.99	26.89	26.84	28.00	17.99	17.89	17.84	19.00
EDGE (8PSK, 2 Tx slots)	24.56	24.41	24.39	25.50	18.56	18.41	18.39	19.50
EDGE (8PSK, 3 Tx slots)	23.01	22.88	22.88	24.00	18.75	18.62	18.62	19.74
EDGE (8PSK, 4 Tx slots)	21.43	21.45	21.33	22.50	18.43	18.45	18.33	19.50

Maximum Average RF Power (Proximity Sensor Inactive)

Band GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GPRS (GMSK, 1 Tx slot)	30.13	30.22	30.23	30.50	21.13	21.22	21.23	21.50
GPRS (GMSK, 2 Tx slots)	27.36	27.45	27.47	28.00	21.36	21.45	21.47	22.00
EDGE (8PSK, 1 Tx slot)	25.62	25.68	25.74	27.00	16.62	16.68	16.74	18.00
EDGE (8PSK, 2 Tx slots)	23.43	23.46	23.38	24.50	17.43	17.46	17.38	18.50
EDGE (8PSK, 3 Tx slots)	21.90	21.81	21.87	23.00	17.64	17.55	17.61	18.74
EDGE (8PSK, 4 Tx slots)	20.44	20.64	20.43	21.50	17.44	17.64	17.43	18.50

Reduced Average RF Power (Proximity Sensor active)

Band GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GPRS (GMSK, 1 Tx slot)	25.59	25.66	25.67	26.00	16.59	16.66	16.67	17.00
GPRS (GMSK, 2 Tx slots)	22.81	22.96	22.95	23.00	16.81	16.96	16.95	17.00
EDGE (8PSK, 1 Tx slot)	25.16	25.19	25.18	26.00	16.16	16.19	16.18	17.00
EDGE (8PSK, 2 Tx slots)	22.40	22.42	22.41	23.00	16.40	16.42	16.41	17.00
EDGE (8PSK, 3 Tx slots)	20.38	20.45	20.50	21.00	16.12	16.19	16.24	16.74
EDGE (8PSK, 4 Tx slots)	19.43	19.61	19.62	20.00	16.43	16.61	16.62	17.00

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration



<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D02v02r02, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/HSUPA/DC-HSDPA output power is < 0.25dB higher than RMC, or reported SAR with RMC 12.2kbps setting is $\leq 1.2\text{W/kg}$, HSDPA/HSUPA/DC-HSDPA SAR evaluation can be excluded..

Maximum Average RF Power (Proximity Sensor Inactive)


Band			WCDMA V			WCDMA II			WCDMA IV		
TX Channel			4132	4182	4233	9262	9400	9538	1312	1413	1513
Rx Channel			4357	4407	4458	9662	9800	9938	1537	1638	1738
Frequency (MHz)			826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
MPR (dB)	3GPP Rel 99	RMC 12.2Kbps	24.30	24.10	24.11	23.80	23.83	23.72	23.98	23.82	23.87
0	3GPP Rel 6	HSDPA Subtest-1	24.08	23.91	23.92	23.58	23.65	23.33	23.67	23.52	23.59
0	3GPP Rel 6	HSDPA Subtest-2	23.04	22.86	22.88	22.53	22.59	22.57	22.68	22.50	22.61
0.5	3GPP Rel 6	HSDPA Subtest-3	22.75	22.60	22.61	22.29	22.37	22.13	22.44	22.28	22.32
0.5	3GPP Rel 6	HSDPA Subtest-4	22.48	22.30	22.31	21.99	22.09	21.88	22.15	22.03	22.05
0	3GPP Rel 6	HSUPA Subtest-1	23.02	22.82	22.85	22.48	22.57	22.34	22.67	22.57	22.59
2	3GPP Rel 6	HSUPA Subtest-2	20.90	20.75	20.78	20.54	20.55	20.38	20.64	20.55	20.58
1	3GPP Rel 6	HSUPA Subtest-3	21.73	21.56	21.58	21.28	21.29	21.09	21.40	21.33	21.37
2	3GPP Rel 6	HSUPA Subtest-4	21.24	21.07	21.09	20.81	20.90	20.65	21.01	20.97	20.98
0	3GPP Rel 6	HSUPA Subtest-5	23.11	22.88	22.89	22.57	22.64	22.41	22.74	22.34	22.43

Reduced Average RF Power (Proximity Sensor active)

Band			WCDMA V			WCDMA II			WCDMA IV		
TX Channel			4132	4182	4233	9262	9400	9538	1312	1413	1513
Rx Channel			4357	4407	4458	9662	9800	9938	1537	1638	1738
Frequency (MHz)			826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
MPR (dB)	3GPP Rel 99	RMC 12.2Kbps	18.89	18.83	18.84	17.46	17.49	17.44	17.94	17.91	17.89
0	3GPP Rel 6	HSDPA Subtest-1	18.65	18.58	18.61	17.23	17.34	17.21	17.40	17.34	17.24
0	3GPP Rel 6	HSDPA Subtest-2	18.63	18.53	18.55	17.22	17.33	17.20	17.39	17.33	17.23
0.5	3GPP Rel 6	HSDPA Subtest-3	18.61	18.52	18.54	17.21	17.32	17.19	17.38	17.32	17.22
0.5	3GPP Rel 6	HSDPA Subtest-4	18.60	18.48	18.53	17.20	17.31	17.18	17.37	17.31	17.21
0	3GPP Rel 6	HSUPA Subtest-1	18.34	18.32	18.33	17.03	17.09	17.01	17.17	17.10	17.05
2	3GPP Rel 6	HSUPA Subtest-2	18.41	18.30	18.34	16.75	16.81	16.72	16.96	16.88	16.84
1	3GPP Rel 6	HSUPA Subtest-3	18.25	18.16	18.24	16.90	17.01	16.88	17.11	17.06	17.02
2	3GPP Rel 6	HSUPA Subtest-4	18.33	18.25	18.27	16.99	17.05	16.93	17.10	17.07	17.04
0	3GPP Rel 6	HSUPA Subtest-5	18.75	18.62	18.65	17.34	17.44	17.31	17.60	17.37	17.36

14. Antenna Location

<Tablet PC>

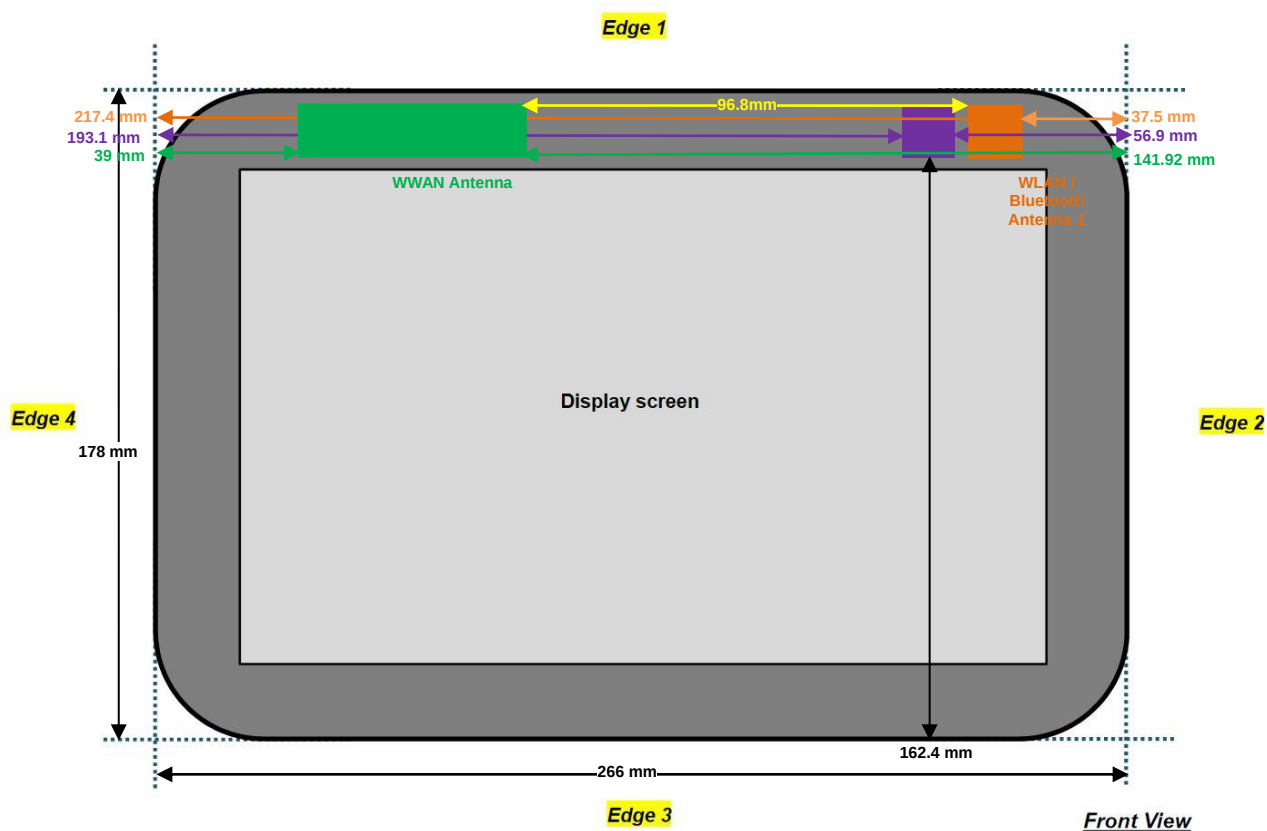

<SAR test exclusion table>
General Note:

- The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"
- Maximum power is the source-based time-average power and represents the maximum RF output power among production units
- Per KDB 447498 D01v05r02, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
- Per KDB 447498 D01v05r02, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
- Per KDB 447498 D01v05r02, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
- Per KDB 447498 D01v05r02, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
 - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz

Exposure Position	Wireless Interface	GPRS850 Class 10	GPRS1900 Class 10	WCDMA Band V	WCDMA Band IV	WCDMA Band II
Bottom Face	Tune-up Maximum power	25	22	24.5	24.5	24.5
	Tune-up Maximum rated power(mW)	316.00	158.00	282.00	282.00	282.00
	Antenna to user (mm)	5				
Bottom Face	SAR exclusion threshold (Ratio)	58.20	43.66	51.88	74.61	77.89
	SAR testing required?	Yes	Yes	Yes	Yes	Yes
Edge 1	Antenna to user (mm)	5				
	SAR exclusion threshold (Ratio)	58.20	43.66	51.88	74.61	77.89
	SAR testing required?	Yes	Yes	Yes	Yes	Yes
Edge 2	Antenna to user (mm)	141.92				
	SAR exclusion threshold (mW)	682.54	1027.76	681.51	1032.59	1027.82
	SAR testing required?	No	No	No	No	No
Edge 3	Antenna to user (mm)	162.4				
	SAR exclusion threshold (mW)	798.32	1232.56	797.02	1237.39	1232.62
	SAR testing required?	No	No	No	No	No
Edge 4	Antenna to user (mm)	39				
	SAR exclusion threshold (Ratio)	7.46	5.6	6.65	9.57	9.99
	SAR testing required?	Yes	Yes	Yes	Yes	Yes

15. SAR Test Results

General Note:

- Per KDB 447498 D01v05r02, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
- Per KDB 447498 D01v05r02, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- For the exposure positions that proximity sensor power reduction is applied for SAR compliance, additional SAR testing with EUT transmitting full power in normal mode was performed; 1.1cm for bottom face, 0.7cm for edge 1.
- Per KDB 941225 D02v02r02, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/HSUPA output power is < 0.25dB higher than RMC12.2Kbps, or reported SAR with RMC 12.2kbps setting is ≤ 1.2W/kg, HSDPA/HSUPA SAR evaluation can be excluded.

15.1 Body SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	(Sensor) Power Back-off	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (2 Tx slots)	Bottom Face	1.1cm	128	824.2	OFF	30.7	31	1.072	0.04	0.709	0.760
	GSM850	GPRS (2 Tx slots)	Edge 1	0.7cm	128	824.2	OFF	30.7	31	1.072	-0.05	0.791	0.848
	GSM850	GPRS (2 Tx slots)	Edge 1	0.7cm	189	836.4	OFF	30.62	31	1.091	-0.05	0.732	0.799
	GSM850	GPRS (2 Tx slots)	Edge 1	0.7cm	251	848.8	OFF	30.61	31	1.094	-0.07	0.705	0.771
	GSM850	GPRS (2 Tx slots)	Edge 4	0cm	128	824.2	OFF	30.7	31	1.072	-0.04	0.267	0.286
01	GSM850	GPRS (2 Tx slots)	Bottom Face	0cm	128	824.2	ON	26.4	26.5	1.023	0.03	1.190	1.218
	GSM850	GPRS (2 Tx slots)	Bottom Face	0cm	189	836.4	ON	26.34	26.5	1.038	0.01	1.130	1.172
	GSM850	GPRS (2 Tx slots)	Bottom Face	0cm	251	848.8	ON	26.3	26.5	1.047	-0.05	1.060	1.110
	GSM850	GPRS (2 Tx slots)	Edge 1	0cm	128	824.2	ON	26.4	26.5	1.023	-0.13	0.622	0.636
	GSM1900	GPRS (2 Tx slots)	Bottom Face	1.1cm	810	1909.8	OFF	27.47	28	1.130	0.05	0.576	0.651
	GSM1900	GPRS (2 Tx slots)	Edge1	0.7cm	810	1909.8	OFF	27.47	28	1.130	-0.06	0.441	0.498
	GSM1900	GPRS (2 Tx slots)	Edge 4	0cm	810	1909.8	OFF	27.47	28	1.130	0.16	0.358	0.404
	GSM1900	GPRS (2 Tx slots)	Bottom Face	0cm	661	1880	ON	22.96	23	1.009	-0.01	1.110	1.120
	GSM1900	GPRS (2 Tx slots)	Bottom Face	0cm	512	1850.2	ON	22.81	23	1.045	0.02	1.060	1.107
02	GSM1900	GPRS (2 Tx slots)	Bottom Face	0cm	810	1909.8	ON	22.95	23	1.012	-0.01	1.110	1.123
	GSM1900	GPRS (2 Tx slots)	Edge1	0cm	661	1880	ON	22.96	23	1.009	-0.09	0.477	0.481

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	(Sensor) Power Back-off	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V	RMC 12.2Kbps	Bottom Face	1.1cm	4132	826.4	OFF	24.3	24.5	1.047	0.08	0.879	0.920
	WCDMA V	RMC 12.2Kbps	Bottom Face	1.1cm	4182	836.4	OFF	24.1	24.5	1.096	0.04	0.822	0.901
	WCDMA V	RMC 12.2Kbps	Bottom Face	1.1cm	4233	846.6	OFF	24.11	24.5	1.094	0.07	0.809	0.885
	WCDMA V	RMC 12.2Kbps	Edge 1	0.7cm	4132	826.4	OFF	24.3	24.5	1.047	-0.05	0.717	0.751
	WCDMA V	RMC 12.2Kbps	Edge 4	0cm	4132	826.4	OFF	24.3	24.5	1.047	0.12	0.191	0.200
03	WCDMA V	RMC 12.2Kbps	Bottom Face	0cm	4132	826.4	ON	18.89	19	1.026	0.01	1.090	1.118
	WCDMA V	RMC 12.2Kbps	Bottom Face	0cm	4182	836.4	ON	18.83	19	1.040	-0.02	0.998	1.038
	WCDMA V	RMC 12.2Kbps	Bottom Face	0cm	4233	846.6	ON	18.84	19	1.038	-0.02	0.926	0.961
	WCDMA V	RMC 12.2Kbps	Edge 1	0cm	4132	826.4	ON	18.89	19	1.026	-0.03	0.656	0.673
	WCDMA IV	RMC 12.2Kbps	Bottom Face	1.1cm	1312	1712.4	OFF	23.98	24.5	1.127	0.01	0.911	1.027
	WCDMA IV	RMC 12.2Kbps	Bottom Face	1.1cm	1413	1732.6	OFF	23.82	24.5	1.169	-0.02	1.030	1.205
	WCDMA IV	RMC 12.2Kbps	Bottom Face	1.1cm	1513	1752.6	OFF	23.87	24.5	1.156	0	1.020	1.179
	WCDMA IV	RMC 12.2Kbps	Edge 1	0.7cm	1312	1712.4	OFF	23.98	24.5	1.127	0.09	0.850	0.958
	WCDMA IV	RMC 12.2Kbps	Edge 1	0.7cm	1413	1732.6	OFF	23.82	24.5	1.169	0.02	1.000	1.169
	WCDMA IV	RMC 12.2Kbps	Edge 1	0.7cm	1513	1752.6	OFF	23.87	24.5	1.156	-0.1	0.884	1.022
	WCDMA IV	RMC 12.2Kbps	Edge 4	0cm	1312	1712.4	OFF	23.98	24.5	1.127	0.15	0.264	0.298
	WCDMA IV	RMC 12.2Kbps	Bottom Face	0cm	1312	1712.4	ON	17.94	18	1.014	0.01	1.220	1.237
	WCDMA IV	RMC 12.2Kbps	Bottom Face	0cm	1413	1732.6	ON	17.91	18	1.021	-0.01	1.170	1.194
04	WCDMA IV	RMC 12.2Kbps	Bottom Face	0cm	1513	1752.6	ON	17.89	18	1.026	-0.01	1.210	1.241
	WCDMA IV	RMC 12.2Kbps	Edge 1	0cm	1312	1712.4	ON	17.94	18	1.014	-0.02	0.478	0.485
	WCDMA II	RMC 12.2Kbps	Bottom Face	1.1cm	9400	1880	OFF	23.83	24.5	1.167	-0.01	1.070	1.248
	WCDMA II	RMC 12.2Kbps	Bottom Face	1.1cm	9262	1852.4	OFF	23.8	24.5	1.175	-0.14	1.100	1.292
05	WCDMA II	RMC 12.2Kbps	Bottom Face	1.1cm	9538	1907.6	OFF	23.72	24.5	1.197	-0.05	1.100	1.316
	WCDMA II	RMC 12.2Kbps	Edge 1	0.7cm	9400	1880	OFF	23.83	24.5	1.167	-0.07	1.060	1.237
	WCDMA II	RMC 12.2Kbps	Edge 1	0.7cm	9262	1852.4	OFF	23.8	24.5	1.175	0.08	0.991	1.164
	WCDMA II	RMC 12.2Kbps	Edge 1	0.7cm	9538	1907.6	OFF	23.72	24.5	1.197	-0.06	0.965	1.155
	WCDMA II	RMC 12.2Kbps	Edge 4	0cm	9400	1880	OFF	23.83	24.5	1.167	0.12	0.594	0.693
	WCDMA II	RMC 12.2Kbps	Bottom Face	0cm	9400	1880	ON	17.49	17.5	1.002	-0.12	1.120	1.123
	WCDMA II	RMC 12.2Kbps	Bottom Face	0cm	9262	1852.4	ON	17.46	17.5	1.009	-0.06	1.260	1.272
	WCDMA II	RMC 12.2Kbps	Bottom Face	0cm	9538	1907.6	ON	17.44	17.5	1.014	-0.04	1.160	1.176
	WCDMA II	RMC 12.2Kbps	Edge 1	0cm	9400	1880	ON	17.49	17.5	1.002	-0.09	0.702	0.704

15.2 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	(Sensor) Power Back-off	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	GSM850	GPRS (2 Tx slots)	Bottom Face	0cm	128	824.2	ON	26.4	26.5	1.023	0.03	1.190	-	1.218
2nd	GSM850	GPRS (2 Tx slots)	Bottom Face	0cm	128	824.2	ON	26.4	26.5	1.023	0.09	1.160	1.03	1.187
1st	WCDMA IV	RMC 12.2Kbps	Bottom Face	0cm	1312	1712.4	ON	17.94	18	1.014	0.01	1.220	-	1.237
2nd	WCDMA IV	RMC 12.2Kbps	Bottom Face	0cm	1312	1712.4	ON	17.94	18	1.014	0.05	1.190	1.03	1.207
1st	WCDMA II	RMC 12.2Kbps	Bottom Face	0cm	9262	1852.4	ON	17.46	17.5	1.009	-0.06	1.260	-	1.272
2nd	WCDMA II	RMC 12.2Kbps	Bottom Face	0cm	9262	1852.4	ON	17.46	17.5	1.009	0.06	1.240	1.02	1.251

General Note:

- Per KDB 865664 D01v01r03, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg
- Per KDB 865664 D01v01r03, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
- The ratio is the difference in percentage between original and repeated *measured SAR*.
- All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Portable Tablet	Note
		Body	
1.	GPRS/EDGE(Data) + WLAN2.4GHz(data)	Yes	2.4GHz Hotspot
2.	WCDMA(Data) + WLAN2.4GHz(data)	Yes	2.4GHz Hotspot
3.	GPRS/EDGE(Data) + Bluetooth(data)	Yes	
4.	WCDMA(Data) + Bluetooth(data)	Yes	
5.	GPRS/EDGE(data) + WLAN5GHz(data)	No	
6.	WCDMA(data) + WLAN5GHz(data)	No	

General Note:

- WLAN SAR test result and Bluetooth maximum power in the Sporton SAR report FCC ID: B94HNC78CBXN (report no. FA392719-16 Rev.01) are used for simultaneous transmission analysis.
- For simultaneous transmission analysis for exposure position of bottom face 1.1cm and Edge1 0.7cm, WLAN SAR tested at 0mm separation testing results are used for conservative SAR summation.
- For co-location analysis:
 - For WWAN SAR testing was performed on bottom face, Edge1 and Edge4, according to KDB 447498 D01v05r02 exclusion thresholds which can be referred to page26.
 - The WLAN SAR testing was performed on bottom face, Edge1 and Edge2, according to KDB 447498 D01v05r02 exclusion thresholds which can be referred to Sporton FCC SAR Report, FCC ID: B94HNC78CBXN, Report No: FA392719-16 Rev.01 page25.
- Per KDB 447498 D01v05r02, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation $< 1.6\text{W/kg}$.
 - $\text{SPLSR} = (\text{SAR}_1 + \text{SAR}_2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan
If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary
 - Simultaneously transmission SAR measurement, and the reported multi-band SAR $< 1.6\text{W/kg}$
- For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05r02 based on the formula below.
 - $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - When the minimum test separation distance is $< 5\text{mm}$, the distance is used 5mm to determine SAR test exclusion.
 - 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is $> 50 \text{ mm}$.
 - Bluetooth estimated SAR is conservatively determined by 5mm separation, for all applicable exposure positions.

Bluetooth Max Power	Exposure Position	All Positions
9.5 dBm	Estimated SAR (W/kg)	0.378 W/kg

16.1 Body Exposure Conditions

<WWAN + WLAN Antenna 0>

Position	WWAN		WLAN Ant 0	Summed SAR (W/kg)	SPLSR	Case No
	WWAN Band	SAR (W/kg)	SAR (W/kg)			
Bottom Face At 1.1 cm	GSM850	0.760	1.161	1.92	0.02	Case 1
	GSM1900	0.651	1.161	1.81	0.02	Case 2
	WCDMA V	0.920	1.161	2.08	0.02	Case 3
	WCDMA IV	1.205	1.161	2.37	0.03	Case 4
	WCDMA II	1.316	1.161	2.48	0.03	Case 5
Edge1 At 0.7 cm	GSM850	0.848	0.237	1.09		
	GSM1900	0.498	0.237	0.74		
	WCDMA V	0.751	0.237	0.99		
	WCDMA IV	1.169	0.237	1.41		
	WCDMA II	1.237	0.237	1.47		
Bottom Face At 0cm	GSM850	1.218	1.161	2.38	0.03	Case 6
	GSM1900	1.123	1.161	2.28	0.03	Case 7
	WCDMA V	1.118	1.161	2.28	0.03	Case 8
	WCDMA IV	1.241	1.161	2.40	0.03	Case 9
	WCDMA II	1.272	1.161	2.43	0.03	Case 10
Edge1 At 0cm	GSM850	0.636	0.237	0.87		
	GSM1900	0.481	0.237	0.72		
	WCDMA V	0.673	0.237	0.91		
	WCDMA IV	0.485	0.237	0.72		
	WCDMA II	0.704	0.237	0.94		

<WWAN + WLAN Antenna 1>

Position	WWAN		WLAN Ant 1	Summed SAR (W/kg)	SPLSR	Case No
	WWAN Band	SAR (W/kg)	SAR (W/kg)			
Bottom Face At 1.1 cm	GSM850	0.760	0.676	1.44		
	GSM1900	0.651	0.676	1.33		
	WCDMA V	0.920	0.676	1.60	0.01	Case 33
	WCDMA IV	1.205	0.676	1.88	0.02	Case 11
	WCDMA II	1.316	0.676	1.99	0.02	Case 12
Edge1 At 0.7 cm	GSM850	0.848	0.157	1.01		
	GSM1900	0.498	0.157	0.66		
	WCDMA V	0.751	0.157	0.91		
	WCDMA IV	1.169	0.157	1.33		
	WCDMA II	1.237	0.157	1.39		
Bottom Face At 0cm	GSM850	1.218	0.676	1.89	0.02	Case 13
	GSM1900	1.123	0.676	1.80	0.02	Case 14
	WCDMA V	1.118	0.676	1.79	0.02	Case 15
	WCDMA IV	1.241	0.676	1.92	0.02	Case 16
	WCDMA II	1.272	0.676	1.95	0.02	Case 17
Edge1 At 0cm	GSM850	0.636	0.157	0.79		
	GSM1900	0.481	0.157	0.64		
	WCDMA V	0.673	0.157	0.83		
	WCDMA IV	0.485	0.157	0.64		
	WCDMA II	0.704	0.157	0.86		

<WWAN + WLAN Antenna 0+1>


Position	WWAN		WLAN Ant 0+1	Summed SAR (W/kg)	SPLSR	Case No
	WWAN Band	SAR (W/kg)	SAR (W/kg)			
Bottom Face At 1.1 cm	GSM850	0.760	1.163	1.92	0.02	Case 18
	GSM1900	0.651	1.163	1.81	0.02	Case 19
	WCDMA V	0.920	1.163	2.08	0.02	Case 20
	WCDMA IV	1.205	1.163	2.37	0.03	Case 21
	WCDMA II	1.316	1.163	2.48	0.03	Case 22
Edge1 At 0.7 cm	GSM850	0.848	0.257	1.11		
	GSM1900	0.498	0.257	0.76		
	WCDMA V	0.751	0.257	1.01		
	WCDMA IV	1.169	0.257	1.43		
	WCDMA II	1.237	0.257	1.49		
Bottom Face At 0cm	GSM850	1.218	1.163	2.38	0.03	Case 23
	GSM1900	1.123	1.163	2.29	0.02	Case 24
	WCDMA V	1.118	1.163	2.28	0.02	Case 25
	WCDMA IV	1.241	1.163	2.40	0.03	Case 26
	WCDMA II	1.272	1.163	2.44	0.03	Case 27
Edge1 At 0cm	GSM850	0.636	0.257	0.89		
	GSM1900	0.481	0.257	0.74		
	WCDMA V	0.673	0.257	0.93		
	WCDMA IV	0.485	0.257	0.74		
	WCDMA II	0.704	0.257	0.96		

<WWAN + Bluetooth Antenna 1>


Position	WWAN		Bluetooth	Summed SAR (W/kg)	SPLSR	Case No
	WWAN Band	SAR (W/kg)	Estimated SAR (W/kg)			
Bottom Face At 1.1 cm	GSM850	0.760	0.378	1.14		
	GSM1900	0.651	0.378	1.03		
	WCDMA V	0.920	0.378	1.30		
	WCDMA IV	1.205	0.378	1.58		
	WCDMA II	1.316	0.378	1.69	0.02	Case 28
Edge1 At 0.7 cm	GSM850	0.848	0.378	1.23		
	GSM1900	0.498	0.378	0.88		
	WCDMA V	0.751	0.378	1.13		
	WCDMA IV	1.169	0.378	1.55		
	WCDMA II	1.237	0.378	1.62	0.02	Case 29
Bottom Face At 0cm	GSM850	1.218	0.378	1.60	0.02	Case 30
	GSM1900	1.123	0.378	1.50		
	WCDMA V	1.118	0.378	1.50		
	WCDMA IV	1.241	0.378	1.62	0.02	Case 31
	WCDMA II	1.272	0.378	1.65	0.02	Case 32
Edge1 At 0cm	GSM850	0.636	0.378	1.01		
	GSM1900	0.481	0.378	0.86		
	WCDMA V	0.673	0.378	1.05		
	WCDMA IV	0.485	0.378	0.86		
	WCDMA II	0.704	0.378	1.08		

16.2 SPLSR Evaluation and Analysis


Case 1	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM850	Bottom Face	0.76	1.1	X	Y	Z	123.0	1.92	0.02	Not required
	2.4GHz WLAN		1.161	0	0.0716	0.0668	-0.175				

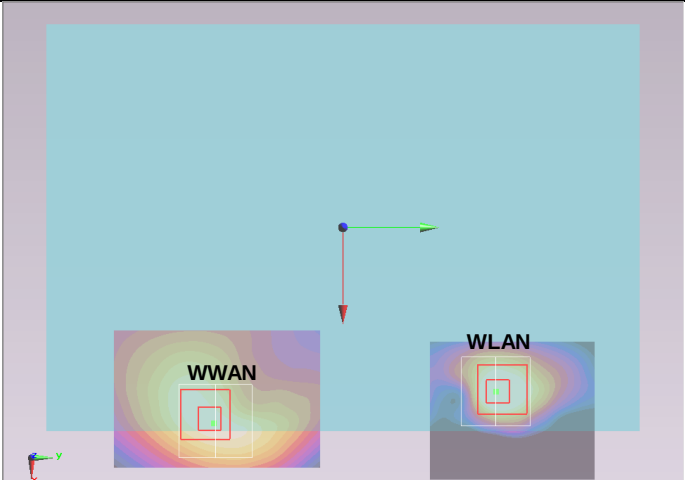


Case 2	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM1900	Bottom Face	0.651	1.1	X	Y	Z	126.3	1.81	0.02	Not required
	2.4GHz WLAN		1.161	0	0.0716	0.0668	-0.175				

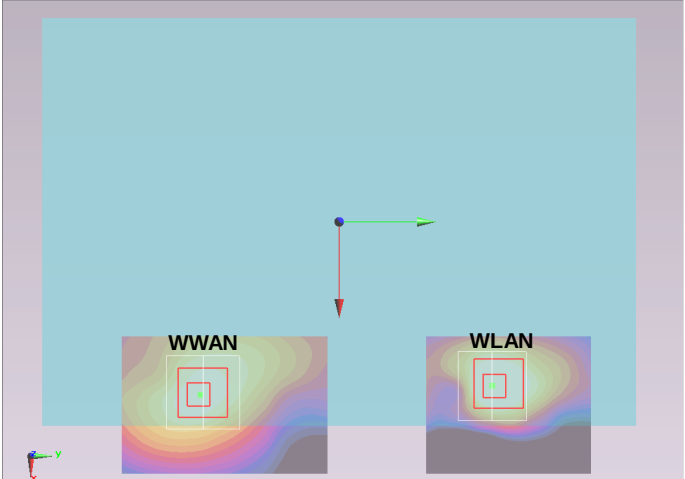


Case 3	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA V	Bottom Face	0.92	1.1	X	Y	Z	120.1	2.08	0.02	Not required
	2.4GHz WLAN		1.161	0	0.0716	0.0668	-0.175				

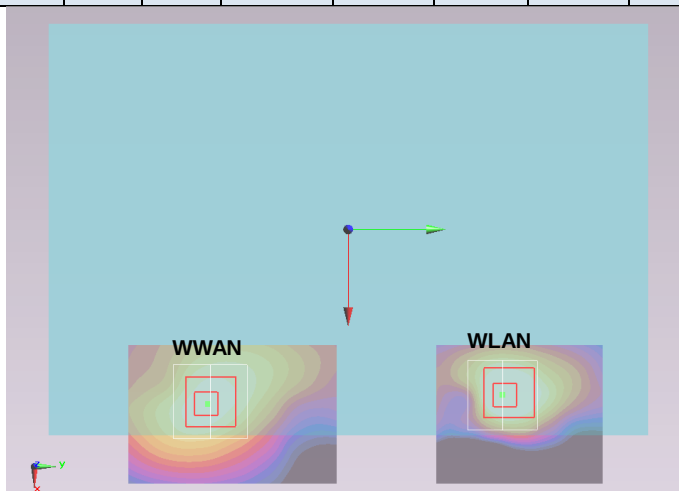


Case 4	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA IV	Bottom Face	1.205	1.1	X	Y	Z	122.1	2.37	0.03	Not required
	2.4GHz WLAN		1.161	0	0.0716	0.0668	-0.175				

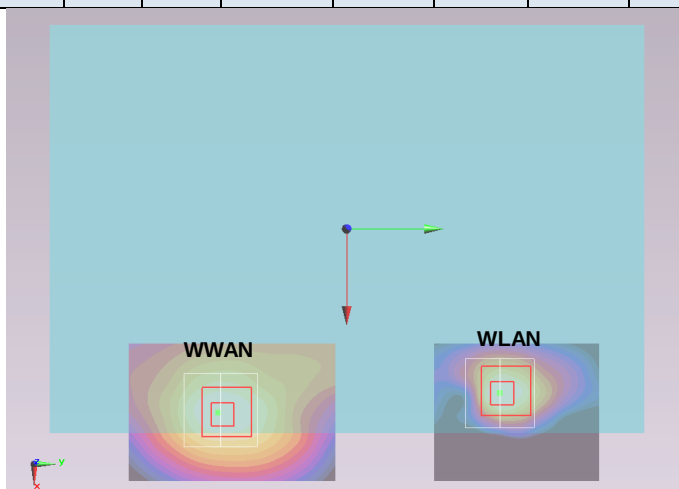


Case 5	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA II	Bottom Face	1.316	1.1	X	Y	Z	126.4	2.48	0.03	Not required
	2.4GHz WLAN		1.161	0	0.0716	0.0668	-0.175				

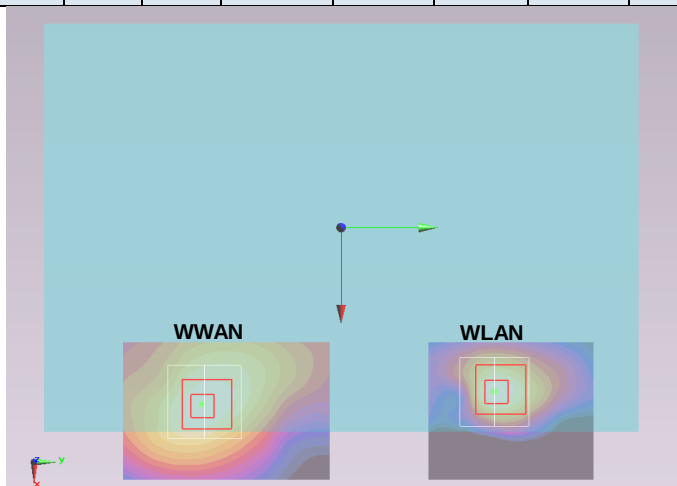


Case 6	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM850	Bottom Face	1.218	0	X	Y	Z	122.2	2.38	0.03	Not required
	2.4GHz WLAN		1.161	0	0.0716	0.0668	-0.175				

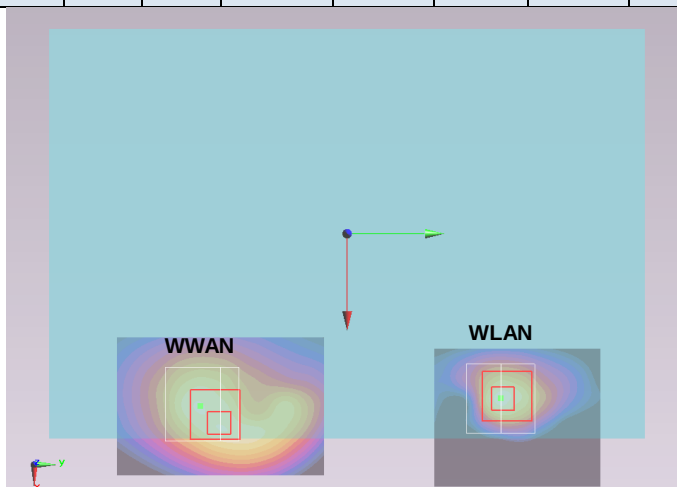


Case 7	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM1900	Bottom Face	1.123	0	X	Y	Z	130.9	2.28	0.03	Not required
	2.4GHz WLAN		1.161	0	0.0716	0.0668	-0.175				

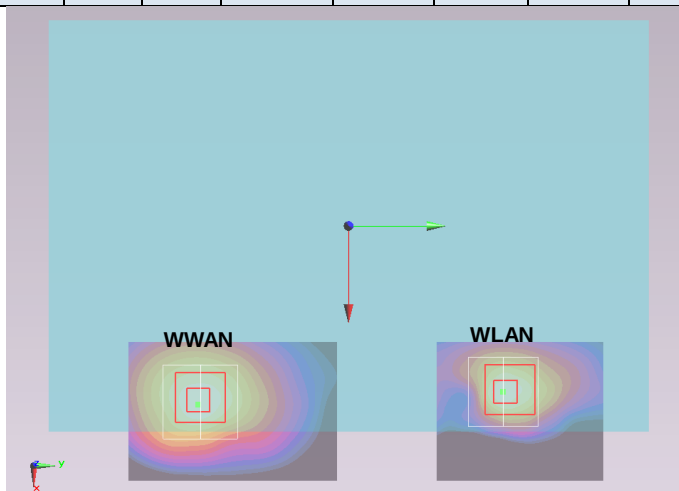


Case 8	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA V	Bottom Face	1.118	0	X	Y	Z	122.2	2.28	0.03	Not required
	2.4GHz WLAN		1.161	0	0.0716	0.0668	-0.175				

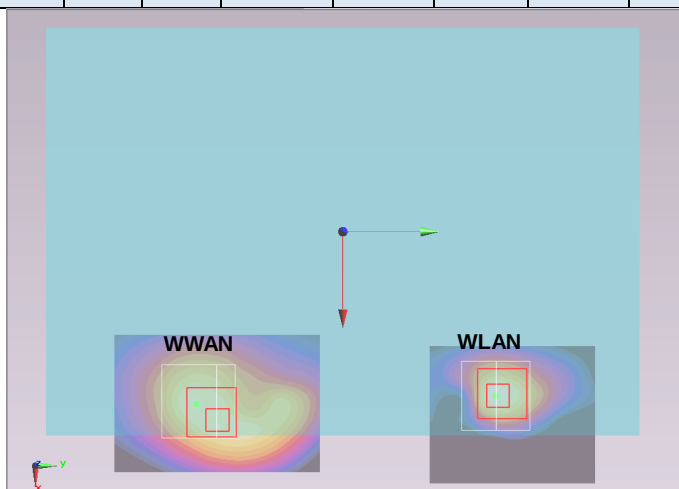


Case 9	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA IV	Bottom Face	1.241	0	X	Y	Z	130.8	2.40	0.03	Not required
	2.4GHz WLAN		1.161	0	0.0716	0.0668	-0.175				

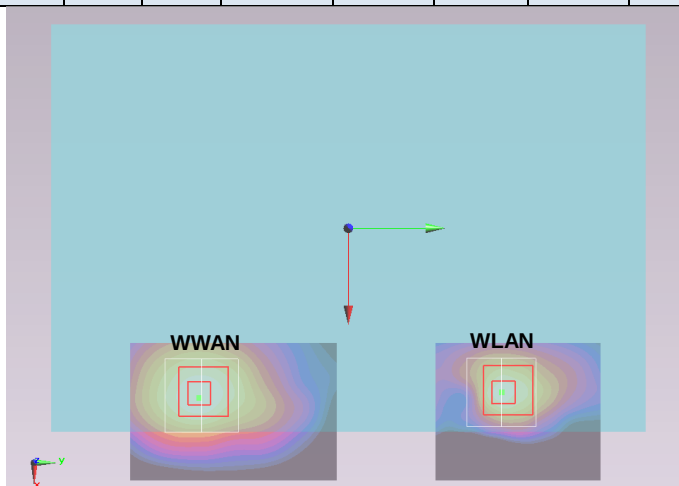


Case 10	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA II	Bottom Face	1.272	0	X	Y	Z	132.3	2.43	0.03	Not required
	2.4GHz WLAN		1.161	0	0.0716	0.0668	-0.175				

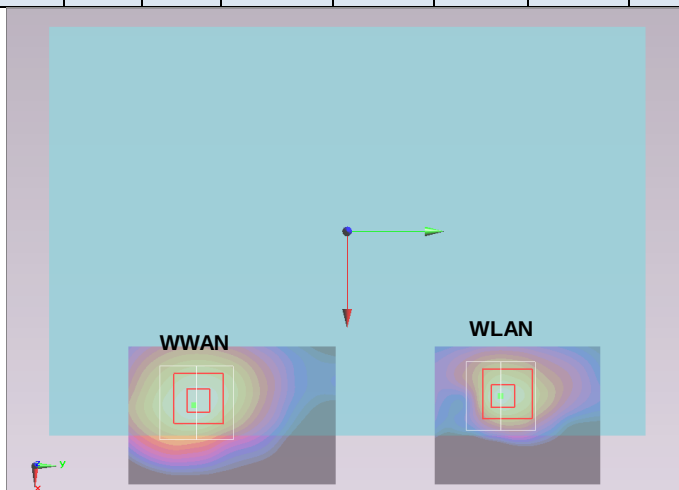


Case 33	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA V	Bottom Face	0.92	1.1	X	Y	Z	135.5	1.60	0.01	Not required
	2.4GHz WLAN		0.676	0	0.0728	0.0824	-0.175				

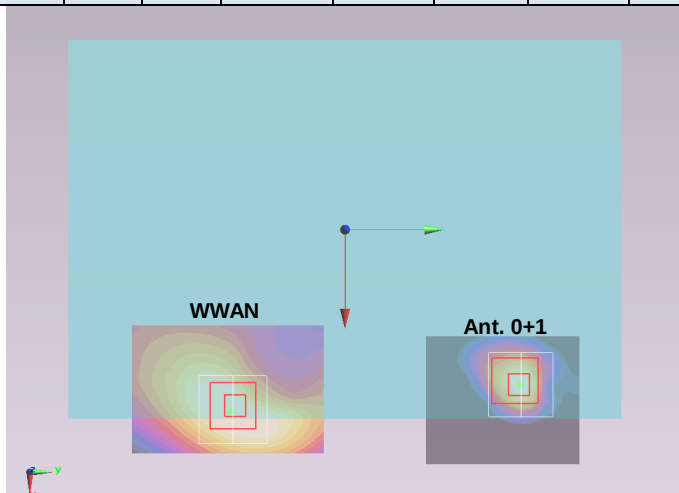


Case 11	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA IV	Bottom Face	1.205	1.1	X	Y	Z	137.6	1.88	0.02	Not required
	2.4GHz WLAN		0.676	0	0.0728	0.0824	-0.175				

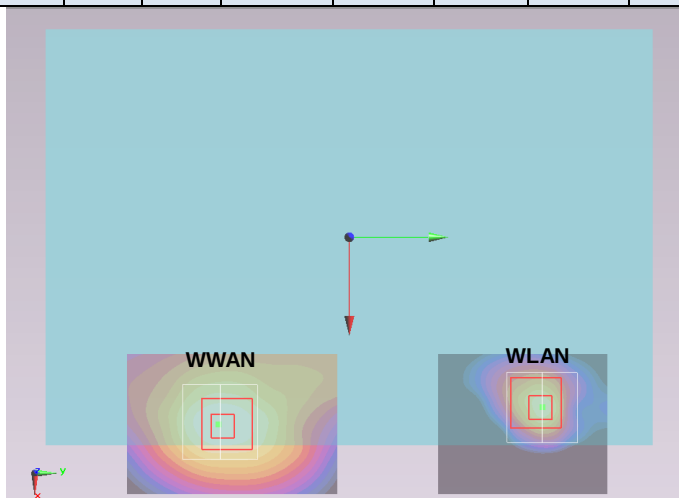


Case 12	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA II	Bottom Face	1.316	1.1	X	Y	Z	142.0	1.99	0.02	Not required
	2.4GHz WLAN		0.676	0	0.0728	0.0824	-0.175				

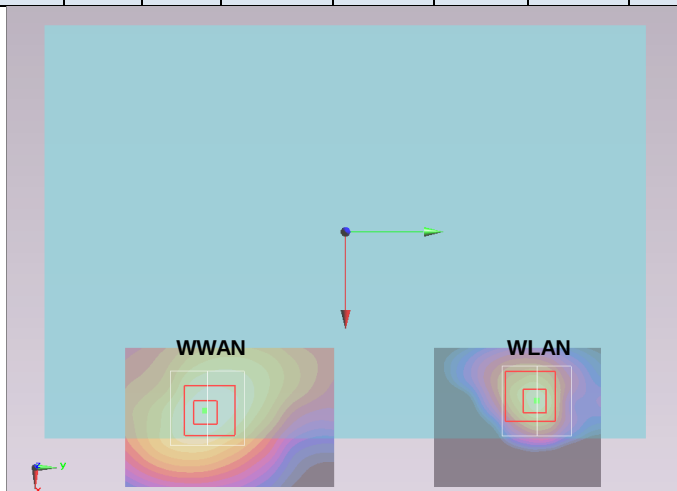


Case 13	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM850	Bottom Face	1.218	0	X	Y	Z	137.7	1.89	0.02	Not required
	2.4GHz WLAN		0.676	0	0.0728	0.0824	-0.175				

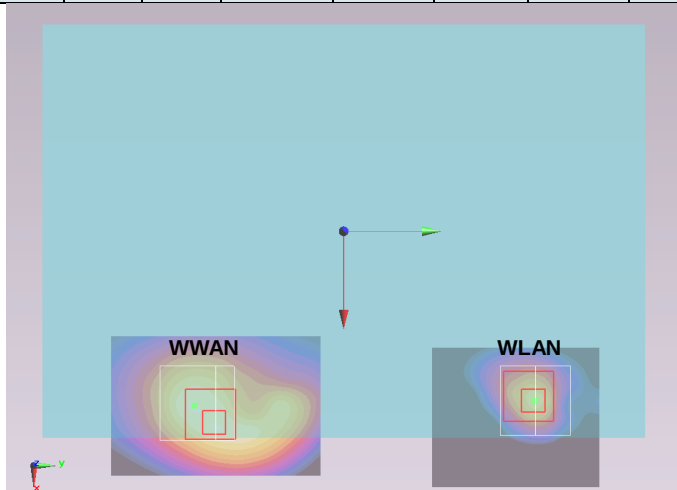


Case 14	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM1900	Bottom Face	1.123	0	X	Y	Z	146.4	1.80	0.02	Not required
	2.4GHz WLAN		0.676	0	0.0728	0.0824	-0.175				

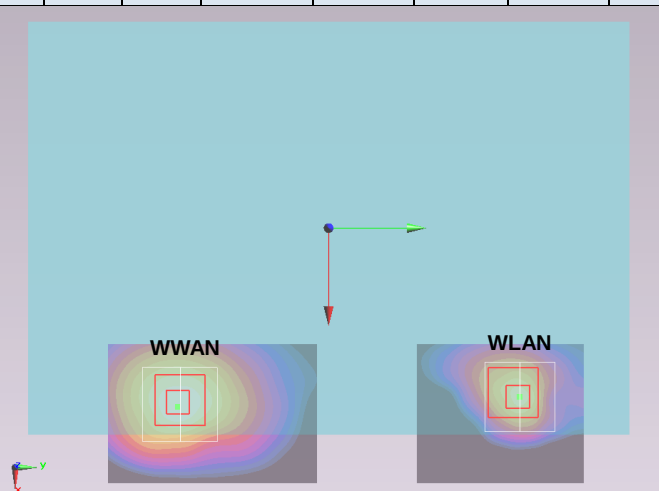


Case 15	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA V	Bottom Face	1.118	0	X	Y	Z	137.7	1.79	0.02	Not required
	2.4GHz WLAN		0.676	0	0.0728	0.0824	-0.175				

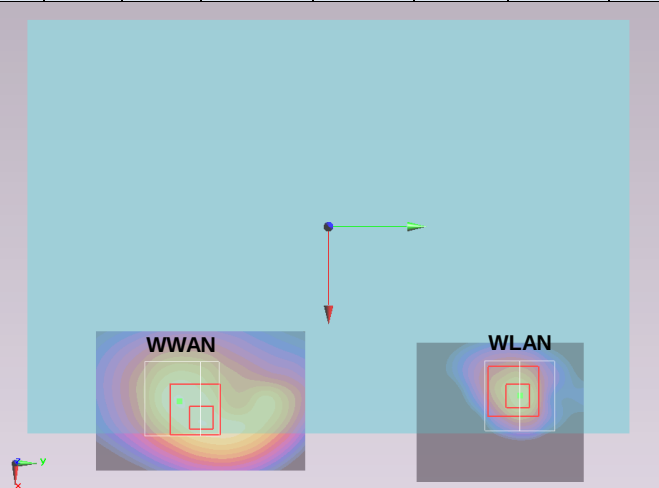


Case 16	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA IV	Bottom Face	1.241	0	X	Y	Z	146.4	1.92	0.02	Not required
	2.4GHz WLAN		0.676	0	0.0728	0.0824	-0.175				

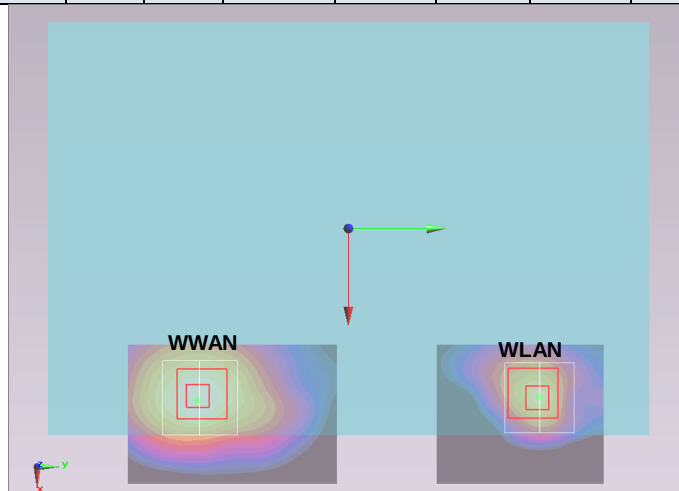


Case 17	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA II	Bottom Face	1.272	0	X	Y	Z	147.9	1.95	0.02	Not required
	2.4GHz WLAN		0.676	0	0.0728	0.0824	-0.175				

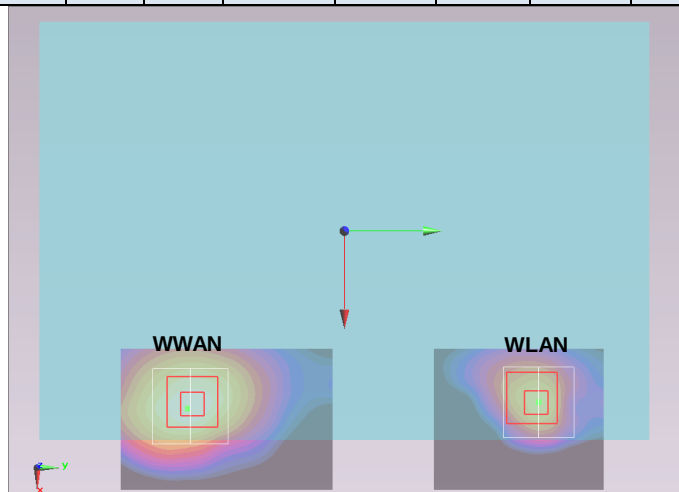


Case 18	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM850	Bottom Face	0.76	1.1	X	Y	Z	139.4	1.92	0.02	Not required
	2.4GHz WLAN		1.163	0	0.0728	0.0834	-0.175				

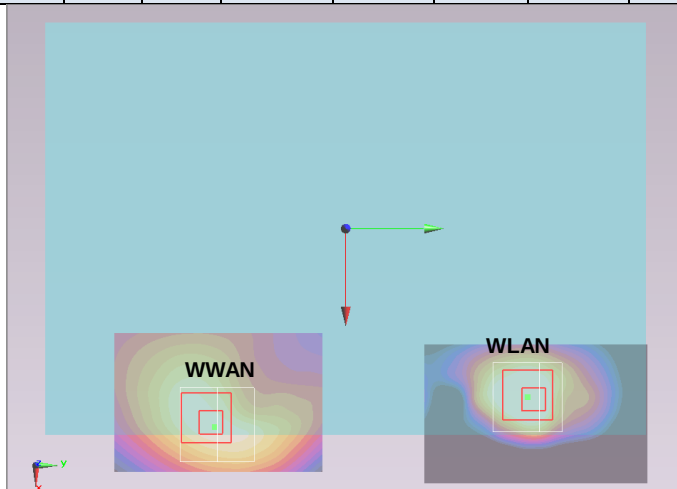


Case 19	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM1900	Bottom Face	0.651	1.1	X	Y	Z	142.9	1.81	0.02	Not required
	2.4GHz WLAN		1.163	0	0.0728	0.0834	-0.175				

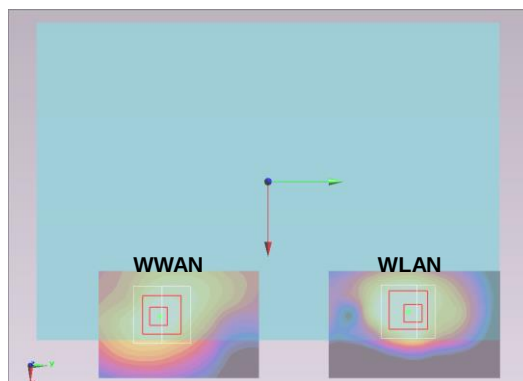


Case 20	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA V	Bottom Face	0.92	1.1	X	Y	Z	136.5	2.08	0.02	Not required
	2.4GHz WLAN		1.163	0	0.0728	0.0834	-0.175				

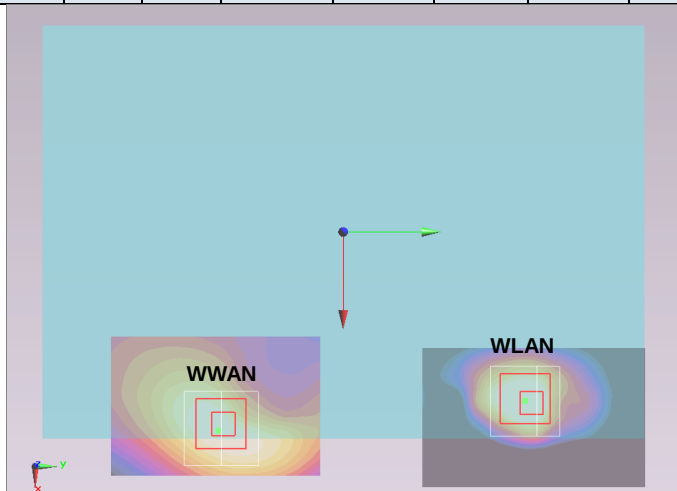


Case 21	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA IV	Bottom Face	1.205	1.1	X	Y	Z	138.6	2.37	0.03	Not required
	2.4GHz WLAN		1.163	0	0.0728	0.0834	-0.175				

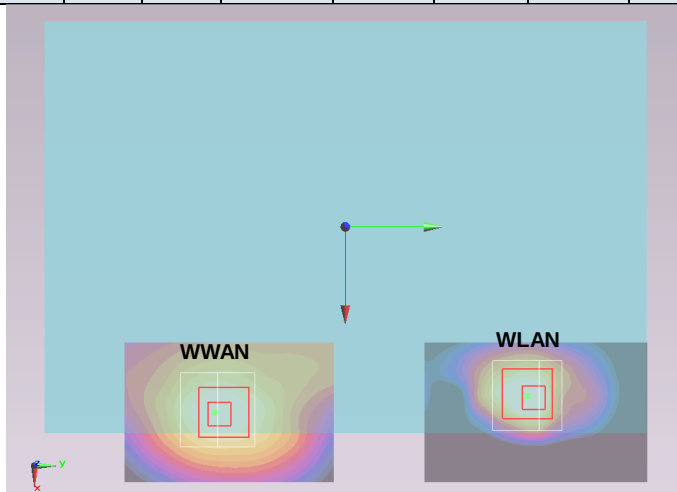


Case 22	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA II	Bottom Face	1.316	1.1	X	Y	Z	142.9	2.48	0.03	Not required
	2.4GHz WLAN		1.163	0	0.0728	0.0834	-0.175				

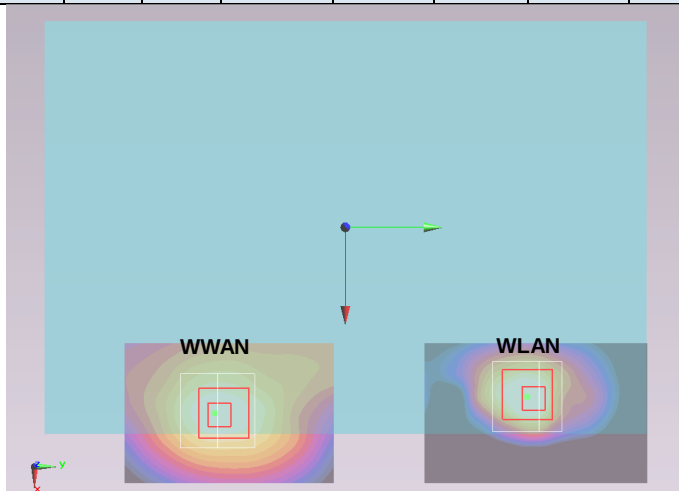


Case 23	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM850	Bottom Face	1.218	0	X	Y	Z	138.7	2.38	0.03	Not required
	2.4GHz WLAN		1.163	0	0.0728	0.0834	-0.175				

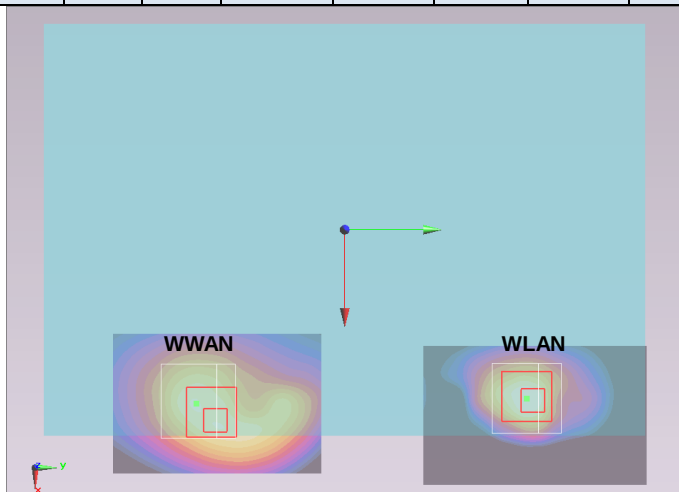


Case 24	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM1900	Bottom Face	1.123	0	X	Y	Z	147.4	2.29	0.02	Not required
	2.4GHz WLAN		1.163	0	0.0728	0.0834	-0.175				

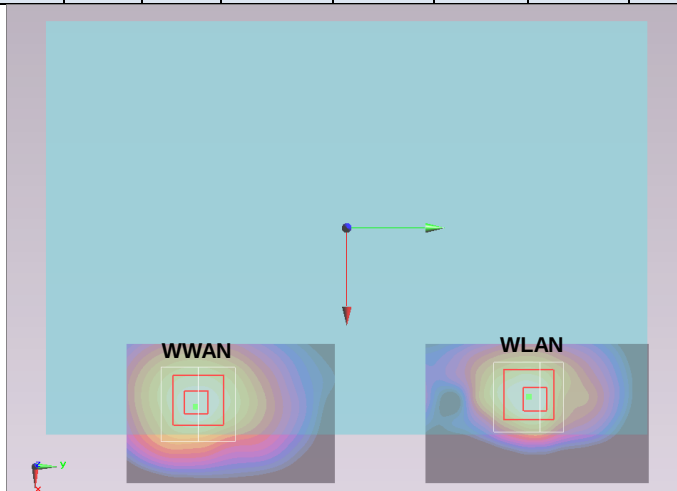


Case 25	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA V	Bottom Face	1.118	0	X	Y	Z	138.7	2.28	0.02	Not required
	2.4GHz WLAN		1.163	0	0.0728	0.0834	-0.175				

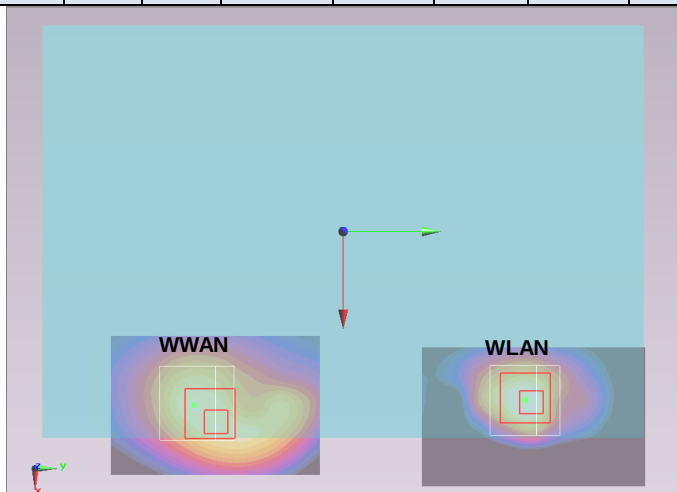


Case 26	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA IV	Bottom Face	1.241	0	X	Y	Z	147.4	2.40	0.03	Not required
	2.4GHz WLAN		1.163	0	0.0728	0.0834	-0.175				

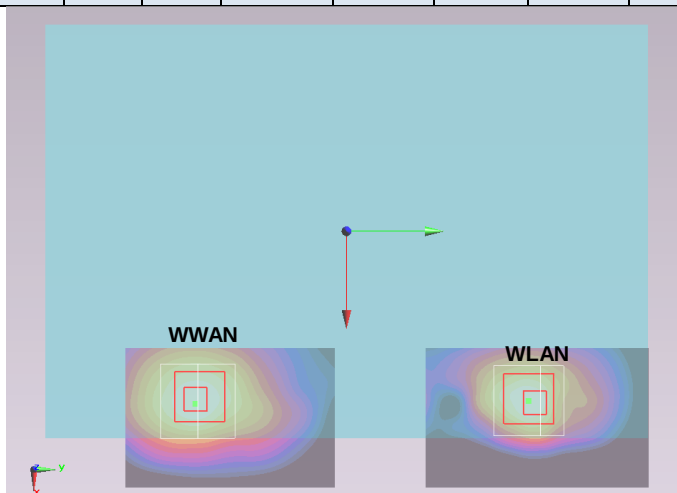

Case 27	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA II	Bottom Face	1.272	0	X	Y	Z	148.9	2.44	0.03	Not required
	2.4GHz WLAN		1.163	0	0.0728	0.0834	-0.175				

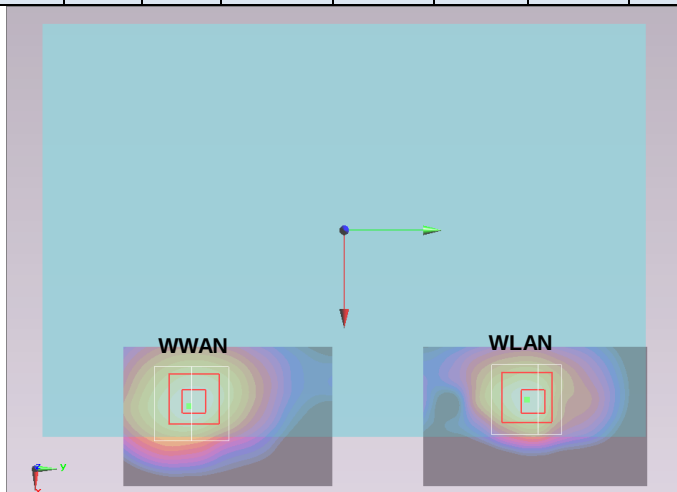

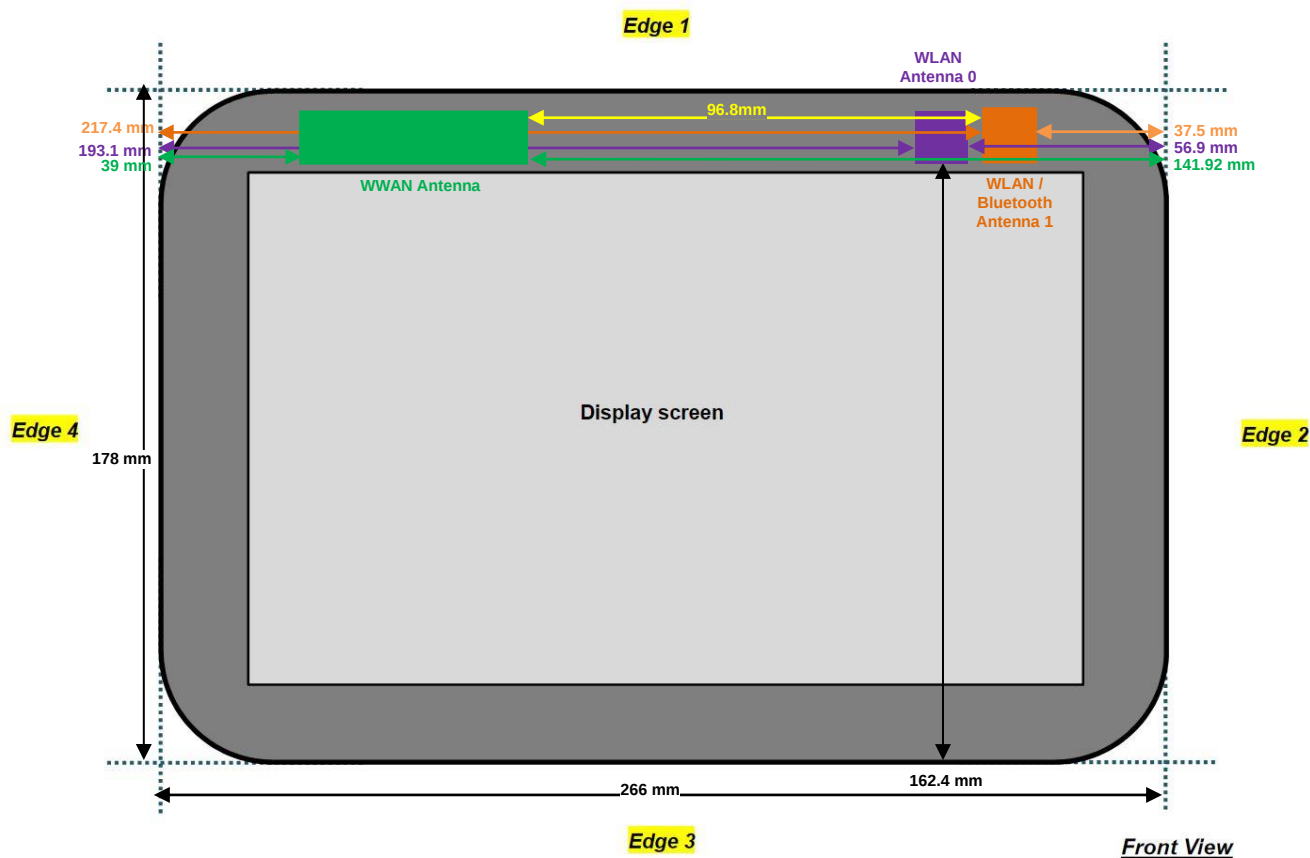
Note:

- For Bluetooth SPLSR analysis, The minimum distance of "WWAN to Bluetooth antenna1" is used for conservative SPLSR calculation.
- $SPLSR = (SAR1 + SAR2)1.5 / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.

Case 28	Band	Position	SAR (W/kg)	Gap (cm)	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
	WCDMA II	Bottom Face	1.316	1.1	96.8	1.69	0.02	Not required
	Bluetooth		0.378	0				

Case 29	Band	Position	SAR (W/kg)	Gap (cm)	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
	WCDMA II	Edge 1	1.237	0.7	96.8	1.62	0.02	Not required
	Bluetooth		0.378	0				

Case 30	Band	Position	SAR (W/kg)	Gap (cm)	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
	GSM850	Edge 1	1.218	0.7	96.8	1.60	0.02	Not required
	Bluetooth		0.378	0				

Case 31	Band	Position	SAR (W/kg)	Gap (cm)	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
	WCDMA IV	Bottom Face	1.241	0	96.8	1.62	0.02	Not required
	Bluetooth		0.378	0				

Case 32	Band	Position	SAR (W/kg)	Gap (cm)	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
	WCDMA II	Bottom Face	1.272	0	96.8	1.65	0.02	Not required
	Bluetooth		0.378	0				

Test Engineer : Test Engineer : Vic Yang, Frank Wu, Aaron Chen, Nick Yu, Jack Wu,
Galen Zhang and San Lin

17. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	$1/k^{(b)}$	$1/\sqrt{3}$	$1/\sqrt{6}$	$1/\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) k is the coverage factor

Table 17.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
Measurement System							
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 11.0 %	± 10.8 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						± 22.0 %	± 21.5 %

Table 17.2.Uncertainty Budget for frequency range 300 MHz to 3 GHz

18. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v01r02, "SAR Measurement Procedures for 802.11 a/b/g Transmitters", May 2007
- [6] FCC KDB 447498 D01 v05r02, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Feb 2014
- [7] FCC KDB 941225 D01 v02, "SAR Measurement Procedures for 3G Devices – CDMA 2000 / Ev-Do / WCDMA / HSDPA / HSPA", October 2007
- [8] FCC KDB 941225 D02 v02r02, "SAR Guidance for HSPA, HSPA+, DC-HSDPA and 1x-Advanced", May 2013.
- [9] FCC KDB 941225 D03 v01, "Recommended SAR Test Reduction Procedures for GSM / GPRS / EDGE", December 2008
- [10] FCC KDB 941225 D04 v01, "Evaluating SAR for GSM/(E)GPRS Dual Transfer Mode", January 2010
- [11] FCC KDB 616217 D04 v01r01, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", May 2013
- [12] FCC KDB 865664 D01 v01r03, "SAR Measurement Requirements for 100 MHz to 6 GHz", Feb 2014.
- [13] FCC KDB 865664 D02 v01r01, "RF Exposure Compliance Reporting and Documentation Considerations" May 2013.