


FCC SAR Test Report

APPLICANT : Hewlett-Packard Company
EQUIPMENT : Tablet PC
BRAND NAME : hp
MODEL NAME : HSTNN-C78C
FCC ID : B94HNC78CBXN
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2003

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Deputy Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



Table of Contents

1. Statement of Compliance	4
2. Administration Data	4
3. Guidance Standard	5
4. Equipment Under Test (EUT)	5
4.1 General Information	5
4.2 Maximum Tune-up Limit.....	5
5. RF Exposure Limits.....	6
5.1 Uncontrolled Environment.....	6
5.2 Controlled Environment.....	6
6. Specific Absorption Rate (SAR).....	7
6.1 Introduction	7
6.2 SAR Definition.....	7
7. System Description and Setup	8
8. Measurement Procedures	9
8.1 Spatial Peak SAR Evaluation.....	9
8.2 Power Reference Measurement.....	10
8.3 Area Scan	10
8.4 Zoom Scan.....	11
8.5 Volume Scan Procedures.....	11
8.6 Power Drift Monitoring.....	11
9. Test Equipment List	12
10. System Verification	13
10.1 Tissue Verification	13
10.2 System Performance Check Results.....	14
11. RF Exposure Positions	14
11.1 SAR Testing for Tablet	14
12. Conducted RF Output Power (Unit: dBm).....	15
13. Bluetooth Exclusions Applied	24
14. Antenna Location	24
15. SAR Test Results	26
15.1 Body SAR	26
15.2 Repeated SAR Measurement	28
16. Simultaneous Transmission Analysis.....	29
16.1 Body Exposure Conditions.....	29
17. Uncertainty Assessment	30
18. References.....	33
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA392719-16	Rev. 01	Initial issue of report	Jul. 29, 2014

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Hewlett-Packard Company, Tablet PC, HSTNN-C78C**, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary	
		Body 1g SAR (W/kg)	Simultaneous Transmission SAR (W/kg)
DTS	WLAN 2.4GHz Band	1.16	1.59
	WLAN 5.8GHz Band	1.29	
NII	WLAN 5.2GHz Band	1.14	1.40
	WLAN 5.3GHz Band	1.25	
	WLAN 5.5GHz Band	0.99	
Date of Testing:		11/10/2013 ~ 07/17/2014	

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003.

2. Administration Data

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978

Applicant	
Company Name	Hewlett-Packard Company
Address	3000 Hanover Street, Palo Alto, California 94304, USA

Manufacturer	
Company Name	COMPAL ELECTRONICS, INC.
Address	No.581, Ruiguang Rd., Neihs District, Taipei City 11492, Taiwan (R.O.C.)

3. Guidance Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- FCC KDB 865664 D02 SAR Reporting v01r01
- FCC KDB 447498 D01 General RF Exposure Guidance v05r02
- FCC KDB 248227 D01 SAR meas for 802.11abg v01r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r01

4. Equipment Under Test (EUT)

4.1 General Information

Product Feature & Specification	
Equipment Name	Tablet PC
Brand Name	hp
Model Name	HSTNN-C78C
FCC ID	B94HNC78CBXN
Wireless Technology and Frequency Range	WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	• 802.11a/b/g/n HT20/HT40 • Bluetooth v2.1+EDR • Bluetooth v4.0+LE
EUT Stage	Identical Prototype
Remark: 1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.	

4.2 Maximum Tune-up Limit

Band / Mode	Average Power (dBm)	
	v2.1+EDR	v4.0+LE
Bluetooth	9.5	6.99

Band / Frequency (MHz)	IEEE 802.11 Average Power (dBm)							
	Ant 0			Ant 1			Ant 0+1	
	11b	11g	HT20	11b	11g	HT20	11g	HT20
WLAN 2.4GHz Band	14	13	13	14	13	13	16	

Band / Frequency (MHz)	IEEE 802.11 Average Power (dBm)								
	Ant 0			Ant 1			Ant 0+1		
	11a	HT20	HT40	11a	HT20	HT40	11a	HT20	HT40
WLAN 5GHz Band	12			12			15		

5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

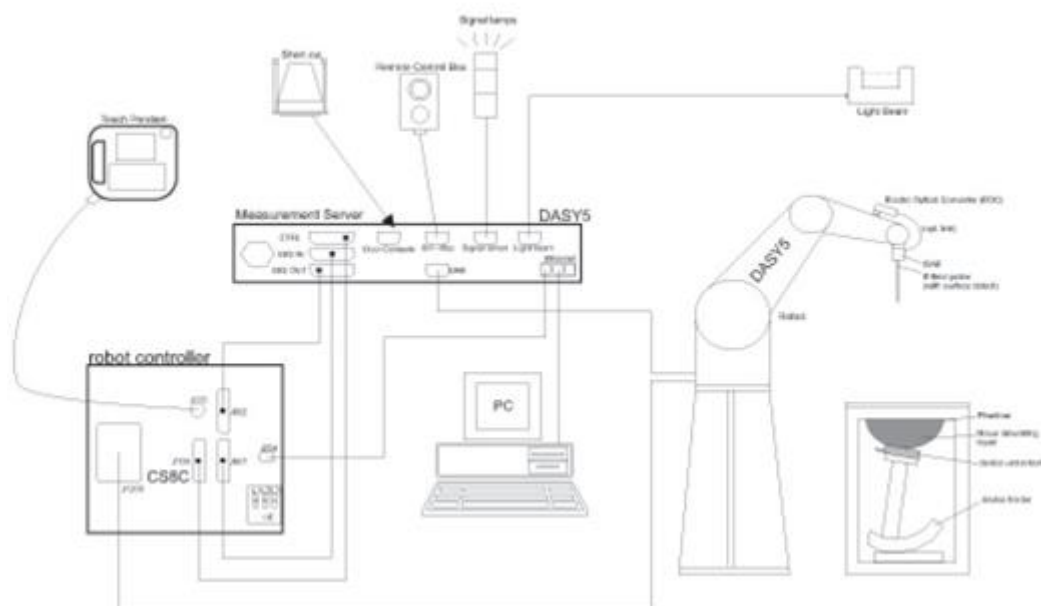

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	2450MHz System Validation Kit	D2450V2	736	Aug. 23, 2013	Aug. 22, 2014
SPEAG	2450MHz System Validation Kit	D2450V2	924	Nov. 13, 2013	Nov. 12, 2014
SPEAG	5GHz System Validation Kit	D5GHzV2	1128	Jul. 24, 2013	Jul. 23, 2014
SPEAG	5GHz System Validation Kit	D5GHzV2	1040	Jun. 20, 2014	Jun. 19, 2015
SPEAG	Data Acquisition Electronics	DAE3	495	May. 08, 2013	May. 07, 2014
SPEAG	Data Acquisition Electronics	DAE4	1279	Jan. 28, 2013	Jan. 27, 2014
SPEAG	Data Acquisition Electronics	DAE4	1338	Nov. 05, 2013	Nov. 04, 2014
SPEAG	Data Acquisition Electronics	DAE4	913	Jan. 17, 2013	Jan. 16, 2014
SPEAG	Data Acquisition Electronics	DAE4	1399	Nov. 07, 2013	Nov. 06, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3697	Oct. 15, 2013	Oct. 14, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3801	Jun. 20, 2013	Jun. 19, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3935	Nov. 04, 2013	Nov. 03, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3925	Jun. 12, 2013	Jun. 11, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3955	Nov. 12, 2013	Nov. 11, 2014
Wisewind	Thermometer	ETP-101	TM560	Oct. 22, 2013	Oct. 21, 2014
Wisewind	Thermometer	ETP-101	TM685	Oct. 22, 2013	Oct. 21, 2014
Wisewind	Thermometer	HTC-1	TM642	Oct. 22, 2013	Oct. 21, 2014
Wisewind	Thermometer	HTC-1	TM281	Oct. 22, 2013	Oct. 21, 2014
H.M.IRIS	Thermometer	TH-08	TM658	Oct. 22, 2013	Oct. 21, 2014
SPEAG	Device Holder	N/A	N/A	NCR	NCR
R&S	Signal Generator	SMF 100A	101107	May. 27, 2013	May. 26, 2014
Agilent	Signal Generator	E4438C	MY49070755	Oct. 08, 2013	Oct. 07, 2014
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Jul. 23, 2013	Jul. 22, 2014
SPEAG	Dielectric Probe Kit	DAK-3.5	1138	Nov. 03, 2013	Nov. 02, 2014
Agilent	ENA Network Analyzer	E5071C	MY46316648	Feb. 07, 2013	Feb. 06, 2014
Agilent	ENA Network Analyzer	E5071C	MY46316648	Feb. 07, 2014	Feb. 06, 2015
Anritsu	Power Meter	ML2495A	1132003	Aug. 28, 2013	Aug. 27, 2014
Anritsu	Power Sensor	MA2411B	1126017	Aug. 27, 2013	Aug. 26, 2014
Anritsu	Power Meter	ML2495A	1349001	Dec. 04, 2013	Dec. 03, 2014
Anritsu	Power Sensor	MA2411B	1306099	Dec. 03, 2013	Dec. 02, 2014
R&S	Spectrum Analyzer	FSP 7	101131	Jul. 09, 2013	Jul. 08, 2014
R&S	Spectrum Analyzer	FSP30	101067	Nov. 20, 2013	Nov. 19, 2014
Agilent	Dual Directional Coupler	778D	50422	Note 1	
Woken	Attenuator	WK0602-XX	N/A	Note 1	
PE	Attenuator	PE7005-10	N/A	Note 1	
PE	Attenuator	PE7005- 3	N/A	Note 1	
AR	Power Amplifier	5S1G4M2	0328767	Note 1	
Mini-Circuits	Power Amplifier	ZVE-3W	162601250	Note 1	
Mini-Circuits	Power Amplifier	ZHL-42W+	13440021344	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.



10. System Verification

10.1 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
2450	Body	22.3	2.015	53.957	1.95	52.70	3.33	2.39	±5	2013/11/18
2450	Body	22.6	1.930	53.269	1.95	52.70	-1.03	1.08	±5	2013/11/28
2450	Body	22.4	2.005	53.959	1.95	52.70	2.82	2.39	±5	2014/7/14
5200	Body	22.4	5.244	47.499	5.30	49.00	-1.06	-3.06	±5	2013/11/10
5200	Body	22.3	5.138	47.493	5.30	49.00	-3.06	-3.08	±5	2014/7/16
5300	Body	22.4	5.457	47.242	5.42	48.88	0.68	-3.35	±5	2013/11/11
5300	Body	22.3	5.270	47.255	5.42	48.88	-2.77	-3.32	±5	2014/7/16
5300	Body	22.3	5.270	47.255	5.42	48.88	-2.77	-3.32	±5	2014/7/16
5600	Body	22.4	5.642	46.786	5.77	48.47	-2.22	-3.47	±5	2013/11/11
5600	Body	22.3	5.773	46.756	5.77	48.47	0.05	-3.54	±5	2013/11/12
5600	Body	22.5	5.857	46.718	5.77	48.47	1.51	-3.61	±5	2014/7/17
5800	Body	22.5	6.229	46.417	6.00	48.20	3.82	-3.70	±5	2013/11/12
5800	Body	22.3	6.127	46.464	6.00	48.20	2.12	-3.60	±5	2013/11/12
5800	Body	22.5	6.217	46.407	6.00	48.20	3.62	-3.72	±5	2014/7/17

10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured SAR (W/kg)	Targeted SAR (W/kg)	Normalized SAR (W/kg)	Deviation (%)
2013/11/18	2450	Body	250	D2450V2-736	3697	1279	12.20	51.30	48.80	-4.87
2013/11/28	2450	Body	250	D2450V2-736	3935	1338	13.40	51.30	53.60	4.48
2014/7/14	2450	Body	250	D2450V2-924	3925	495	12.30	50.20	49.20	-1.99
2013/11/10	5200	Body	100	D5GHzV2-1128	3697	1279	7.00	73.40	70.00	-4.63
2014/7/16	5200	Body	100	D5GHzV2-1040	3955	1399	7.65	77.80	76.50	-1.67
2013/11/11	5300	Body	100	D5GHzV2-1128	3697	1279	7.51	74.30	75.10	1.08
2014/7/16	5300	Body	100	D5GHzV2-1040	3955	1399	7.41	79.10	74.10	-6.32
2014/7/16	5300	Body	100	D5GHzV2-1040	3935	1338	8.36	79.10	83.60	5.69
2013/11/11	5600	Body	100	D5GHzV2-1128	3925	495	7.99	77.80	79.90	2.70
2013/11/12	5600	Body	100	D5GHzV2-1128	3925	495	8.17	77.80	81.70	5.01
2014/7/17	5600	Body	100	D5GHzV2-1040	3935	1338	8.59	82.70	85.90	3.87
2013/11/12	5800	Body	100	D5GHzV2-1128	3801	913	7.32	72.20	73.20	1.39
2013/11/12	5800	Body	100	D5GHzV2-1128	3925	495	7.47	72.20	74.70	3.46
2014/7/17	5800	Body	100	D5GHzV2-1040	3935	1338	7.71	77.30	77.10	-0.26

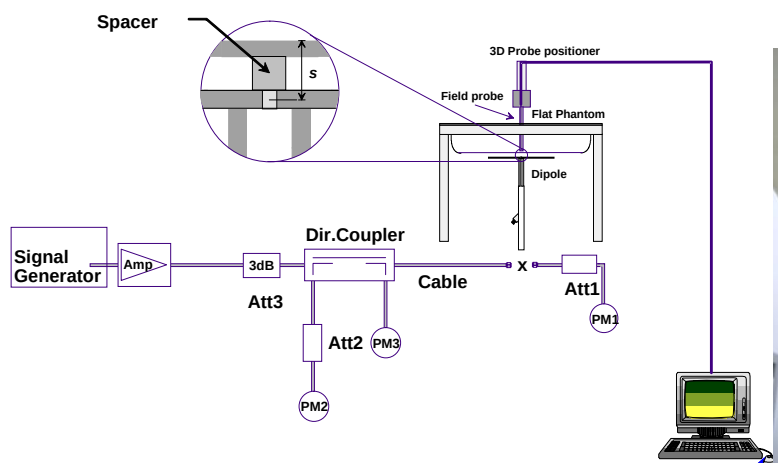


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

11. RF Exposure Positions

11.1 SAR Testing for Tablet

This device can be used also in full sized tablet exposure conditions, due to its size. Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR exclusion threshold in KDB 447498 D01v05r02 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

12. Conducted RF Output Power (Unit: dBm)

<WLAN Conducted Power>

General Note:

1. Per KDB 248227 D01 v01r02, choose the highest output power channel to test SAR and determine further SAR exclusion
2. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate
3. Apply the test exclusion rule in KDB 248227 D01 v01r02 11g, 11n-HT20 output power is less than 1/4dB higher than 11b mode, thus the SAR can be excluded.

<2.4GHz WLAN Antenna 0+1>

WLAN 2.4GHz 802.11g Average Power (dBm)		
Power vs. Channel		
Channel	Frequency (MHz)	Data Rate
		6Mbps
CH 1	2412	15.77
CH 6	2437	15.88
CH 11	2462	15.97

WLAN 2.4GHz 802.11n-HT20 Average Power (dBm)		
Power vs. Channel		
Channel	Frequency (MHz)	MCS Index
		MCS0
CH 1	2412	15.83
CH 6	2437	15.88
CH 11	2462	15.97

<2.4GHz WLAN Antenna 0>
Note:

1. Per KDB 248227 D01 v01r02, choose the highest output power channel to test SAR and determine further SAR exclusion
2. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate
3. Apply the test exclusion rule in KDB 248227 D01 v01r02 11g, 11n-HT20 output power is less than 1/4dB higher than 11b mode, thus the SAR can be excluded.

WLAN 2.4GHz 802.11b Average Power (dBm)		
Power vs. Channel		
Channel	Frequency (MHz)	Data Rate
		1Mbps
CH 1	2412	13.88
CH 6	2437	13.83
CH 11	2462	13.68

WLAN 2.4GHz 802.11g Average Power (dBm)		
Power vs. Channel		
Channel	Frequency (MHz)	Data Rate
		6Mbps
CH 1	2412	12.21
CH 6	2437	12.82
CH 11	2462	12.97

WLAN 2.4GHz 802.11n-HT20 Average Power (dBm)		
Power vs. Channel		
Channel	Frequency (MHz)	MCS Index
		MCS0
CH 1	2412	12.79
CH 6	2437	12.98
CH 11	2462	12.99

<2.4GHz WLAN Antenna 1>
Note:

1. Per KDB 248227 D01 v01r02, choose the highest output power channel to test SAR and determine further SAR exclusion
2. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate
3. Apply the test exclusion rule in KDB 248227 D01 v01r02 11g, 11n-HT20 output power is less than 1/4dB higher than 11b mode, thus the SAR can be excluded.

WLAN 2.4GHz 802.11b Average Power (dBm)		
Power vs. Channel		
Channel	Frequency (MHz)	Data Rate
		1Mbps
CH 1	2412	13.77
CH 6	2437	13.65
CH 11	2462	13.59

WLAN 2.4GHz 802.11g Average Power (dBm)		
Power vs. Channel		
Channel	Frequency (MHz)	Data Rate
		6Mbps
CH 1	2412	13.00
CH 6	2437	12.88
CH 11	2462	12.98

WLAN 2.4GHz 802.11n-HT20 Average Power (dBm)		
Power vs. Channel		
Channel	Frequency (MHz)	MCS Index
		MCS0
CH 1	2412	12.92
CH 6	2437	12.96
CH 11	2462	13.00

**<5GHz WLAN Antenna 0+1>****Note:**

1. Per KDB 248227 D01 v01r02, choose the highest output power channel to test SAR and determine further SAR exclusion
2. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate.
3. Apply the test exclusion rule in KDB 248227 D01 v01r02, 11n-HT20/HT40 output power is less than 1/4dB higher than 802.11a mode, thus the SAR can be excluded.

WLAN 5GHz 802.11a Average Power (dBm)		
Power vs. Channel		
Channel	Frequency (MHz)	Data Rate
		6Mbps
CH 36	5180	14.66
CH 40	5200	14.71
CH 44	5220	14.81
CH 48	5240	14.97
CH 52	5260	14.76
CH 56	5280	14.80
CH 60	5300	14.96
CH 64	5320	14.97
CH 100	5500	14.86
CH 104	5520	14.81
CH 108	5540	14.75
CH 112	5560	14.71
CH 116	5580	14.77
CH 120	5600	14.72
CH 124	5620	14.65
CH 128	5640	14.70
CH 132	5660	14.83
CH 136	5680	14.75
CH 140	5700	14.80
CH 149	5745	14.88
CH 153	5765	14.73
CH 157	5785	14.77
CH 161	5805	14.69
CH 165	5825	14.70



WLAN 5GHz 802.11n-HT20 Average Power (dBm)		
Power vs. Channel		
Channel	Frequency (MHz)	MCS Index
		MCS0
CH 36	5180	14.98
CH 40	5200	14.74
CH 44	5220	14.80
CH 48	5240	14.74
CH 52	5260	14.80
CH 56	5280	14.89
CH 60	5300	14.98
CH 64	5320	14.92
CH 100	5500	14.85
CH 104	5520	14.81
CH 108	5540	14.71
CH 112	5560	14.70
CH 116	5580	14.75
CH 120	5600	14.80
CH 124	5620	14.82
CH 128	5640	14.73
CH 132	5660	14.79
CH 136	5680	14.75
CH 140	5700	14.80
CH 149	5745	14.97
CH 153	5765	14.87
CH 157	5785	14.77
CH 161	5805	14.77
CH 165	5825	14.64

WLAN 5GHz 802.11n-HT40 Average Power (dBm)		
Power vs. Channel		
Channel	Frequency (MHz)	MCS Index
		MCS0
CH 38	5190	14.68
CH 46	5230	14.95
CH 54	5270	14.86
CH 62	5310	14.94
CH 102	5510	14.88
CH 110	5550	14.86
CH 126	5630	14.80
CH 134	5670	14.91
CH 151	5755	14.67
CH 159	5795	14.78

**<5GHz WLAN Antenna 0>****Note:**

1. Per KDB 248227 D01 v01r02, choose the highest output power channel to test SAR and determine further SAR exclusion
2. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate.
3. Apply the test exclusion rule in KDB 248227 D01 v01r02, 11n-HT20/HT40 output power is less than 1/4dB higher than 802.11a mode, thus the SAR can be excluded.

WLAN 5GHz 802.11a Average Power (dBm)		
Power vs. Channel		
Channel	Frequency (MHz)	Data Rate
		6Mbps
CH 36	5180	11.69
CH 40	5200	11.67
CH 44	5220	11.81
CH 48	5240	11.94
CH 52	5260	11.78
CH 56	5280	11.77
CH 60	5300	11.90
CH 64	5320	11.95
CH 100	5500	11.97
CH 104	5520	11.91
CH 108	5540	11.96
CH 112	5560	11.88
CH 116	5580	11.66
CH 120	5600	11.75
CH 124	5620	11.61
CH 128	5640	11.59
CH 132	5660	11.62
CH 136	5680	11.59
CH 140	5700	11.43
CH 149	5745	11.98
CH 153	5765	11.84
CH 157	5785	11.86
CH 161	5805	11.81
CH 165	5825	11.74



WLAN 5GHz 802.11n-HT20 Average Power (dBm)		
Power vs. Channel		
Channel	Frequency (MHz)	MCS Index
		MCS0
CH 36	5180	11.61
CH 40	5200	11.85
CH 44	5220	11.84
CH 48	5240	11.99
CH 52	5260	11.89
CH 56	5280	11.84
CH 60	5300	11.90
CH 64	5320	11.96
CH 100	5500	11.54
CH 104	5520	11.70
CH 108	5540	11.77
CH 112	5560	11.81
CH 116	5580	11.89
CH 120	5600	11.81
CH 124	5620	11.78
CH 128	5640	11.87
CH 132	5660	11.45
CH 136	5680	11.47
CH 140	5700	11.77
CH 149	5745	11.93
CH 153	5765	11.68
CH 157	5785	11.89
CH 161	5805	11.79
CH 165	5825	11.75

WLAN 5GHz 802.11n-HT40 Average Power (dBm)		
Power vs. Channel		
Channel	Frequency (MHz)	MCS Index
		MCS0
CH 38	5190	11.86
CH 46	5230	11.96
CH 54	5270	11.91
CH 62	5310	11.92
CH 102	5510	11.81
CH 110	5550	11.73
CH 126	5630	11.80
CH 134	5670	11.69
CH 151	5755	11.90
CH 159	5795	11.83

<5GHz WLAN Antenna 1>
Note:

1. Per KDB 248227 D01 v01r02, choose the highest output power channel to test SAR and determine further SAR exclusion
2. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate.
3. Apply the test exclusion rule in KDB 248227 D01 v01r02, 11n-HT20/HT40 output power is less than 1/4dB higher than 802.11a mode, thus the SAR can be excluded.

WLAN 5GHz 802.11a Average Power (dBm)		
Power vs. Channel		
Channel	Frequency (MHz)	Data Rate
		6Mbps
CH 36	5180	11.71
CH 40	5200	11.85
CH 44	5220	11.95
CH 48	5240	11.97
CH 52	5260	11.91
CH 56	5280	11.64
CH 60	5300	11.94
CH 64	5320	11.98
CH 100	5500	11.88
CH 104	5520	11.79
CH 108	5540	11.85
CH 112	5560	11.89
CH 116	5580	11.96
CH 120	5600	11.90
CH 124	5620	11.92
CH 128	5640	11.95
CH 132	5660	11.90
CH 136	5680	11.91
CH 140	5700	11.98
CH 149	5745	11.93
CH 153	5765	11.89
CH 157	5785	11.98
CH 161	5805	11.84
CH 165	5825	11.77

WLAN 5GHz 802.11n-HT20 Average Power (dBm)		
Power vs. Channel		
Channel	Frequency (MHz)	MCS Index
		MCS0
CH 36	5180	11.66
CH 40	5200	11.70
CH 44	5220	11.91
CH 48	5240	11.98
CH 52	5260	11.87
CH 56	5280	11.90
CH 60	5300	11.92
CH 64	5320	11.98
CH 100	5500	11.83
CH 104	5520	11.96
CH 108	5540	11.88
CH 112	5560	11.82
CH 116	5580	11.99
CH 120	5600	11.85
CH 124	5620	11.81
CH 128	5640	11.75
CH 132	5660	11.71
CH 136	5680	11.89
CH 140	5700	11.88
CH 149	5745	11.93
CH 153	5765	11.79
CH 157	5785	11.96
CH 161	5805	11.70
CH 165	5825	11.90

WLAN 5GHz 802.11n-HT40 Average Power (dBm)		
Power vs. Channel		
Channel	Frequency (MHz)	MCS Index
		MCS0
CH 38	5190	11.84
CH 46	5230	11.90
CH 54	5270	11.88
CH 62	5310	11.94
CH 102	5510	11.64
CH 110	5550	11.69
CH 126	5630	11.69
CH 134	5670	11.87
CH 151	5755	11.90
CH 159	5795	11.86

13. Bluetooth Exclusions Applied

Mode Band	Average power(dBm)	
	Bluetooth v2.1+EDR	Bluetooth v4.0+LE
2.4GHz Bluetooth	9.5	6.99

Note:

- Per KDB 447498 D01v05r02, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for}$$

1-g SAR and ≤ 7.5 for 10-g extremity SAR

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison


Bluetooth Max Power (dBm)	Separation Distance (mm)	Frequency (GHz)	exclusion thresholds
9.5	5	2.48	2.83

Note:

Per KDB 447498 D01v05r02, when the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion. The test exclusion threshold is 2.83 which is ≤ 3 , SAR testing is not required.

14. Antenna Location

<Tablet PC>

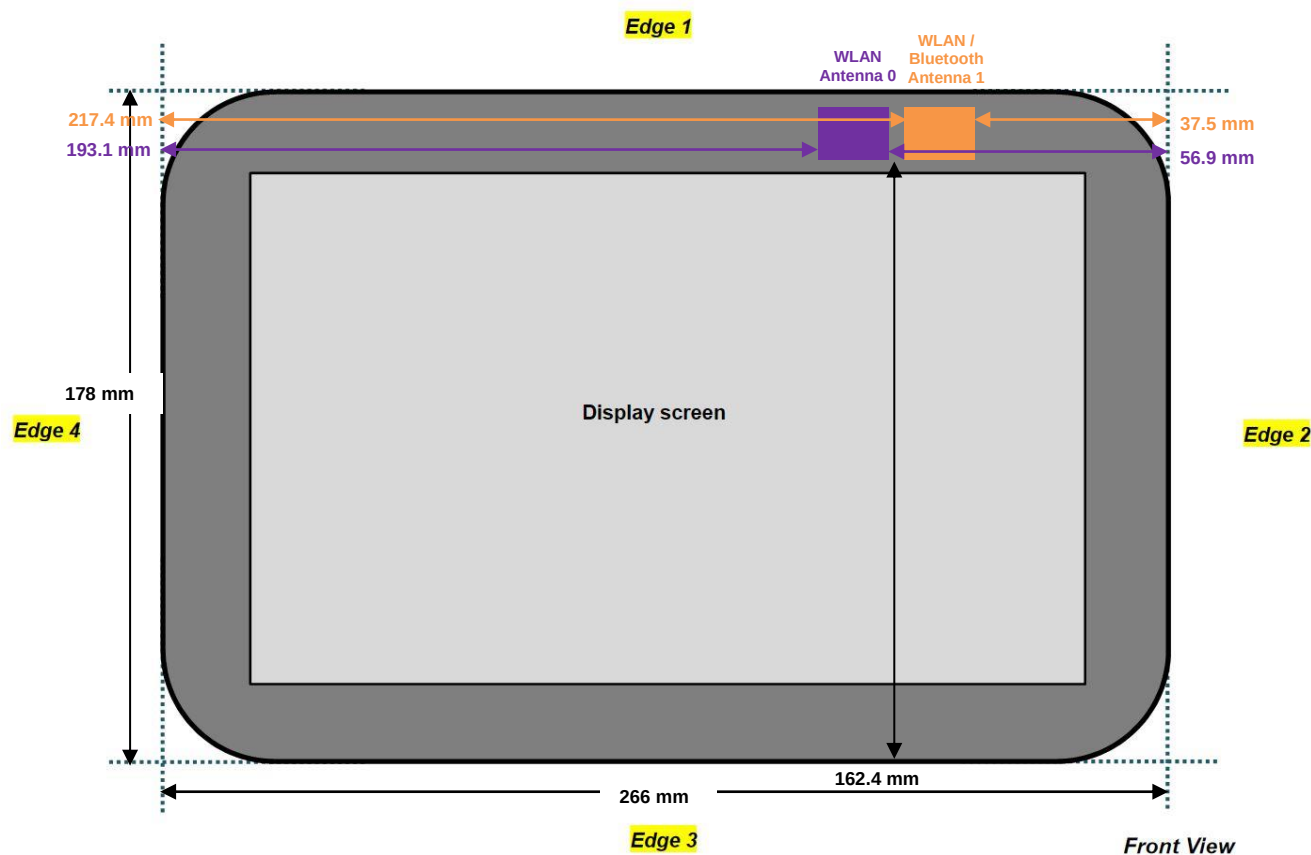

<SAR test exclusion table>
General Note:

- The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"
- Maximum power is the source-based time-average power and represents the maximum RF output power among production units
- Per KDB 447498 D01v05r02, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
- Per KDB 447498 D01v05r02, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
- Per KDB 447498 D01v05r02, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
- Per KDB 447498 D01v05r02, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
 - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz

Exposure Position	Wireless Interface	WLAN2.4GHz Ant 0	WLAN2.4GHz Ant 1	WLAN2.4GHz Ant 0+1	WLAN5GHz Ant 0	WLAN5GHz Ant 1	WLAN5GHz Ant 0+1
	Tune-up Maximum power	14	14	16	12	12	15
	Tune-up Maximum rated power(mW)	25.00	25.00	40.00	16.00	16.00	32.00
Bottom Face	Separation Distance(mm)	5	5	5	5	5	5
	SAR exclusion threshold	7.85	7.85	12.55	7.72	7.72	15.45
	SAR testing required?	Yes	Yes	Yes	Yes	Yes	Yes
Edge 1	Separation Distance(mm)	5	5	5	5	5	5
	SAR exclusion threshold	7.85	7.85	12.55	7.72	7.72	15.45
	SAR testing required?	Yes	Yes	Yes	Yes	Yes	Yes
Edge 2	Separation Distance(mm)	56.9	37.5	37.5	56.9	37.5	37.5
	SAR exclusion threshold	164.6	1.05	1.67	131.15	1.03	2.06
	SAR testing required?	No	No	No	No	No	No
Edge 3	Separation Distance(mm)	162.4	162.4	162.4	162.4	162.4	162.4
	SAR exclusion threshold	1219.6	1219.6	1219.6	1186.15	1186.15	1186.15
	SAR testing required?	No	No	No	No	No	No
Edge 4	Separation Distance(mm)	193.1	217.4	193.1	193.1	217.4	193.1
	SAR exclusion threshold	1526.6	1769.6	1526.6	1493.15	1736.15	1493.15
	SAR testing required?	No	No	No	No	No	No

15. SAR Test Results

General Note:

1. Per KDB 447498 D01v05r02, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v05r02, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

15.1 Body SAR

Plot No.	Band	Mode	Test Position	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	Ant 0	1	2412	13.88	14.00	95.45	1.048	-0.17	0.929	1.000
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	Ant 0	6	2437	13.83	14.00	95.45	1.048	-0.17	1.020	1.111
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	Ant 0	11	2462	13.68	14.00	95.45	1.048	-0.14	1.030	1.161
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	Ant 0	1	2412	13.88	14.00	95.45	1.048	-0.17	0.220	0.237
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	Ant 1	1	2412	13.77	14.00	96.18	1.040	-0.09	0.616	0.676
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	Ant 1	1	2412	13.77	14.00	96.18	1.040	0.02	0.143	0.157
	WLAN2.4GHz	802.11g 6Mbps	Bottom Face	Ant 0+1	11	2462	15.97	16.00	98.12	1.019	0.02	1.070	1.098
	WLAN2.4GHz	802.11g 6Mbps	Bottom Face	Ant 0+1	1	2412	15.77	16.00	98.12	1.019	-0.01	0.816	0.877
01	WLAN2.4GHz	802.11g 6Mbps	Bottom Face	Ant 0+1	6	2437	15.88	16.00	98.12	1.019	-0.06	1.110	1.163
	WLAN2.4GHz	802.11g 6Mbps	Edge 1	Ant 0+1	11	2462	15.97	16.00	98.12	1.019	-0.13	0.250	0.257
	WLAN5GHz	802.11a 6Mbps	Bottom Face	Ant 0	149	5745	11.98	12.00	98.74	1.013	-0.19	1.010	1.028
	WLAN5GHz	802.11a 6Mbps	Bottom Face	Ant 0	157	5785	11.86	12.00	98.74	1.013	-0.16	1.150	1.203
	WLAN5GHz	802.11a 6Mbps	Bottom Face	Ant 0	161	5805	11.81	12.00	98.74	1.013	-0.13	1.146	1.213
	WLAN5GHz	802.11a 6Mbps	Edge 1	Ant 0	149	5745	11.98	12.00	98.74	1.013	0.12	0.431	0.439
	WLAN5GHz	802.11a 6Mbps	Bottom Face	Ant 1	157	5785	11.98	12.00	98.00	1.020	-0.13	0.777	0.796
	WLAN5GHz	802.11a 6Mbps	Bottom Face	Ant 1	149	5745	11.93	12.00	98.00	1.020	-0.09	0.843	0.874
	WLAN5GHz	802.11a 6Mbps	Bottom Face	Ant 1	161	5805	11.84	12.00	98.00	1.020	-0.11	0.700	0.741
	WLAN5GHz	802.11a 6Mbps	Edge 1	Ant 1	157	5785	11.98	12.00	98.00	1.020	-0.04	0.855	0.876
	WLAN5GHz	802.11a 6Mbps	Edge 1	Ant 1	149	5745	11.93	12.00	98.00	1.020	-0.11	0.898	0.931
	WLAN5GHz	802.11a 6Mbps	Edge 1	Ant 1	161	5805	11.84	12.00	98.00	1.020	-0.19	0.785	0.831
	WLAN5GHz	802.11a 6Mbps	Bottom Face	Ant 0+1	149	5745	14.88	15.00	98.12	1.019	-0.14	1.050	1.100
02	WLAN5GHz	802.11a 6Mbps	Bottom Face	Ant 0+1	157	5785	14.77	15.00	98.12	1.019	-0.18	1.200	1.289
	WLAN5GHz	802.11a 6Mbps	Bottom Face	Ant 0+1	165	5825	14.70	15.00	98.12	1.019	-0.12	1.110	1.212
	WLAN5GHz	802.11a 6Mbps	Edge 1	Ant 0+1	149	5745	14.88	15.00	98.12	1.019	-0.13	1.160	1.215
	WLAN5GHz	802.11a 6Mbps	Edge 1	Ant 0+1	157	5785	14.77	15.00	98.12	1.019	-0.17	1.060	1.139
	WLAN5GHz	802.11a 6Mbps	Edge 1	Ant 0+1	165	5825	14.70	15.00	98.12	1.019	-0.14	1.000	1.092



Plot No.	Band	Mode	Test Position	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5GHz	802.11a 6Mbps	Bottom Face	Ant 0	48	5240	11.94	12.00	98.74	1.013	0.18	0.811	0.833
	WLAN5GHz	802.11a 6Mbps	Bottom Face	Ant 0	36	5180	11.69	12.00	98.74	1.013	0.02	0.796	0.867
	WLAN5GHz	802.11a 6Mbps	Edge 1	Ant 0	48	5240	11.94	12.00	98.74	1.013	-0.15	0.787	0.808
	WLAN5GHz	802.11a 6Mbps	Edge 1	Ant 0	36	5180	11.69	12.00	98.74	1.013	-0.08	0.913	0.994
	WLAN5GHz	802.11a 6Mbps	Bottom Face	Ant 1	48	5240	11.97	12.00	98.00	1.020	-0.12	0.621	0.638
	WLAN5GHz	802.11a 6Mbps	Edge 1	Ant 1	48	5240	11.97	12.00	98.00	1.020	0.14	0.559	0.574
	WLAN5GHz	802.11a 6Mbps	Bottom Face	Ant 0+1	48	5240	14.97	15.00	98.12	1.019	-0.03	0.867	0.890
	WLAN5GHz	802.11a 6Mbps	Bottom Face	Ant 0+1	40	5200	14.71	15.00	98.12	1.019	-0.13	0.859	0.936
	WLAN5GHz	802.11a 6Mbps	Edge 1	Ant 0+1	48	5240	14.97	15.00	98.12	1.019	-0.19	1.090	1.118
03	WLAN5GHz	802.11a 6Mbps	Edge 1	Ant 0+1	40	5200	14.71	15.00	98.12	1.019	-0.14	1.050	1.144
	WLAN5GHz	802.11a 6Mbps	Bottom Face	Ant 0	64	5320	11.95	12.00	98.74	1.013	0.14	0.860	0.881
	WLAN5GHz	802.11a 6Mbps	Bottom Face	Ant 0	52	5260	11.78	12.00	98.74	1.013	0.12	0.712	0.760
	WLAN5GHz	802.11a 6Mbps	Edge 1	Ant 0	64	5320	11.95	12.00	98.74	1.013	-0.1	1.000	1.025
	WLAN5GHz	802.11a 6Mbps	Edge 1	Ant 0	52	5260	11.78	12.00	98.74	1.013	-0.04	0.956	1.020
	WLAN5GHz	802.11a 6Mbps	Bottom Face	Ant 1	64	5320	11.98	12.00	98.00	1.020	-0.16	0.655	0.671
	WLAN5GHz	802.11a 6Mbps	Edge 1	Ant 1	64	5320	11.98	12.00	98.00	1.020	0.13	0.507	0.520
	WLAN5GHz	802.11a 6Mbps	Bottom Face	Ant 0+1	64	5320	14.97	15.00	98.12	1.019	-0.03	0.950	0.975
	WLAN5GHz	802.11a 6Mbps	Bottom Face	Ant 0+1	56	5280	14.80	15.00	98.12	1.019	0.04	0.912	0.973
04	WLAN5GHz	802.11a 6Mbps	Edge 1	Ant 0+1	64	5320	14.97	15.00	98.12	1.019	-0.13	1.220	1.252
	WLAN5GHz	802.11a 6Mbps	Edge 1	Ant 0+1	56	5280	14.80	15.00	98.12	1.019	-0.12	1.090	1.163
	WLAN5GHz	802.11a 6Mbps	Bottom Face	Ant 0	100	5500	11.97	12.00	98.74	1.013	-0.14	0.879	0.897
05	WLAN5GHz	802.11a 6Mbps	Bottom Face	Ant 0	112	5560	11.88	12.00	98.74	1.013	-0.15	0.946	0.985
	WLAN5GHz	802.11a 6Mbps	Bottom Face	Ant 0	120	5600	11.75	12.00	98.74	1.013	-0.07	0.794	0.852
	WLAN5GHz	802.11a 6Mbps	Bottom Face	Ant 0	132	5660	11.62	12.00	98.74	1.013	-0.11	0.879	0.972
	WLAN5GHz	802.11a 6Mbps	Edge 1	Ant 0	100	5500	11.97	12.00	98.74	1.013	-0.19	0.617	0.629
	WLAN5GHz	802.11a 6Mbps	Edge 1	Ant 0	112	5560	11.88	12.00	98.74	1.013	-0.1	0.445	0.463
	WLAN5GHz	802.11a 6Mbps	Edge 1	Ant 0	120	5600	11.75	12.00	98.74	1.013	-0.19	0.365	0.392
	WLAN5GHz	802.11a 6Mbps	Edge 1	Ant 0	132	5660	11.62	12.00	98.74	1.013	-0.11	0.302	0.334
	WLAN5GHz	802.11a 6Mbps	Bottom Face	Ant 1	140	5700	11.98	12.00	98.00	1.020	-0.12	0.585	0.600
	WLAN5GHz	802.11a 6Mbps	Bottom Face	Ant 1	100	5500	11.88	12.00	98.00	1.020	-0.1	0.836	0.877
	WLAN5GHz	802.11a 6Mbps	Bottom Face	Ant 1	116	5580	11.96	12.00	98.00	1.020	-0.13	0.685	0.706
	WLAN5GHz	802.11a 6Mbps	Bottom Face	Ant 1	128	5640	11.95	12.00	98.00	1.020	-0.16	0.658	0.679
	WLAN5GHz	802.11a 6Mbps	Edge 1	Ant 1	140	5700	11.98	12.00	98.00	1.020	-0.17	0.609	0.624
	WLAN5GHz	802.11a 6Mbps	Edge 1	Ant 1	100	5500	11.88	12.00	98.00	1.020	-0.18	0.455	0.477
	WLAN5GHz	802.11a 6Mbps	Edge 1	Ant 1	116	5580	11.96	12.00	98.00	1.020	-0.15	0.363	0.374
	WLAN5GHz	802.11a 6Mbps	Edge 1	Ant 1	128	5640	11.95	12.00	98.00	1.020	-0.14	0.431	0.445
	WLAN5GHz	802.11a 6Mbps	Bottom Face	Ant 0+1	100	5500	14.86	15.00	98.12	1.019	-0.11	0.753	0.792
	WLAN5GHz	802.11a 6Mbps	Bottom Face	Ant 0+1	116	5580	14.77	15.00	98.12	1.019	-0.02	0.771	0.829
	WLAN5GHz	802.11a 6Mbps	Bottom Face	Ant 0+1	120	5600	14.72	15.00	98.12	1.019	0.02	0.712	0.774
	WLAN5GHz	802.11a 6Mbps	Bottom Face	Ant 0+1	132	5660	14.83	15.00	98.12	1.019	0.05	0.751	0.796
	WLAN5GHz	802.11a 6Mbps	Edge 1	Ant 0+1	100	5500	14.86	15.00	98.12	1.019	-0.18	0.777	0.817
	WLAN5GHz	802.11a 6Mbps	Edge 1	Ant 0+1	116	5580	14.77	15.00	98.12	1.019	-0.12	0.720	0.774
	WLAN5GHz	802.11a 6Mbps	Edge 1	Ant 0+1	120	5600	14.72	15.00	98.12	1.019	-0.18	0.668	0.726
	WLAN5GHz	802.11a 6Mbps	Edge 1	Ant 0+1	132	5660	14.83	15.00	98.12	1.019	-0.07	0.600	0.636



15.2 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (cm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN2.4GHz	802.11g 6Mbps	Bottom Face	0cm	Ant 0+1	6	2437	15.88	16.00	1.028	98.12	1.019	-0.06	1.110	-	1.163
2nd	WLAN2.4GHz	802.11g 6Mbps	Bottom Face	0cm	Ant 0+1	6	2437	15.88	16.00	1.028	98.12	1.019	-0.03	1.100	1.01	1.152
1st	WLAN5GHz	802.11a 6Mbps	Edge 1	0cm	Ant 0+1	48	5240	14.97	15.00	1.007	98.12	1.019	-0.19	1.090	-	1.118
2nd	WLAN5GHz	802.11a 6Mbps	Edge 1	0cm	Ant 0+1	48	5240	14.97	15.00	1.007	98.12	1.019	-0.19	1.060	1.03	1.088
1st	WLAN5GHz	802.11a 6Mbps	Edge 1	0cm	Ant 0+1	64	5320	14.97	15.00	1.007	98.12	1.019	-0.13	1.220	-	1.252
2nd	WLAN5GHz	802.11a 6Mbps	Edge 1	0cm	Ant 0+1	64	5320	14.97	15.00	1.007	98.12	1.019	-0.07	1.210	1.01	1.242
1st	WLAN5GHz	802.11a 6Mbps	Bottom Face	0cm	Ant 0	112	5560	11.88	12.00	1.028	98.74	1.013	-0.15	0.946	-	0.985
2nd	WLAN5GHz	802.11a 6Mbps	Bottom Face	0cm	Ant 0	112	5560	11.88	12.00	1.028	98.74	1.013	-0.11	0.937	1.01	0.976
1st	WLAN5GHz	802.11a 6Mbps	Bottom Face	0cm	Ant 0+1	157	5785	14.77	15.00	1.054	98.12	1.019	-0.18	1.200	-	1.289
2nd	WLAN5GHz	802.11a 6Mbps	Bottom Face	0cm	Ant 0+1	157	5785	14.77	15.00	1.054	98.12	1.019	-0.15	1.180	1.02	1.268

General Note:

1. Per KDB 865664 D01v01r03, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/kg}$
2. Per KDB 865664 D01v01r03, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/kg}$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Supported
1.	WLAN Antenna 0 + Bluetooth Antenna 1	Yes

General Note:

- EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
- The Scaled SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v05r02, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation < 1.6W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
- For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05r02 based on the formula below.
 - (max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm) $[\sqrt{f(\text{GHz})}/x]$ W/kg for test separation distances ≤ 50 mm; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - When the minimum separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
 - 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Bluetooth Max Power	Exposure Position	Bottom Face	Edge 1
	Separation Distance	< 5 mm	< 5 mm
9.5 dBm	Estimated SAR (W/kg)	0.378 W/kg	0.378/kg

16.1 Body Exposure Conditions

<WLAN Antenna 0 + Bluetooth Antenna 1>

Position	WLAN		Bluetooth	Summed SAR (W/kg)
	Band	SAR (W/kg)	Estimated SAR (W/kg)	
Bottom Face At 0cm	2.4GHz Band	1.161	0.378	1.54
	5.2GHz Band	0.867	0.378	1.25
	5.3GHz Band	0.881	0.378	1.26
	5.5GHz Band	0.985	0.378	1.36
	5.8GHz Band	1.213	0.378	1.59
Edge1 At 0cm	2.4GHz Band	0.237	0.378	0.62
	5.2GHz Band	0.994	0.378	1.37
	5.3GHz Band	1.025	0.378	1.40
	5.5GHz Band	0.629	0.378	1.01
	5.8GHz Band	0.439	0.378	0.82

Test Engineer : Vic Yang, Galen Zhang, Angelo Chang, Aaron Chen, Nick Yu, Bevis Chang, Frank Wu, Jack Wu, and San Lin

17. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	$1/k^{(b)}$	$1/\sqrt{3}$	$1/\sqrt{6}$	$1/\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) k is the coverage factor

Table 17.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
Measurement System							
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 11.0 %	± 10.8 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						± 22.0 %	± 21.5 %

Table 17.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
Measurement System							
Probe Calibration	6.55	Normal	1	1	1	± 6.55 %	± 6.55 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	2.0	Rectangular	√3	1	1	± 1.2 %	± 1.2 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Probe Positioning	9.9	Rectangular	√3	1	1	± 5.7 %	± 5.7 %
Max. SAR Eval.	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 12.8 %	± 12.6 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						± 25.6 %	± 25.2 %

Table 17.3. Uncertainty Budget for frequency range 3 GHz to 6 GHz

18. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v01r02, "SAR Measurement Procedures for 802.11 a/b/g Transmitters", May 2007
- [6] FCC KDB 447498 D01 v05r02, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Feb 2014
- [7] FCC KDB 616217 D04 v01r01, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", May 2013
- [8] FCC KDB 865664 D01 v01r03, "SAR Measurement Requirements for 100 MHz to 6 GHz", Feb 2014.
- [9] FCC KDB 865664 D02 v01r01, "RF Exposure Compliance Reporting and Documentation Considerations" May 2013.