


FCC SAR Test Report

APPLICANT : Hewlett-Packard Company
EQUIPMENT : Tablet PC
BRAND NAME : HP
MODEL NAME : HSTNN-I22C
FCC ID : B94HNI22CHW736
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2003

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Deputy Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



Table of Contents

- 1. Statement of Compliance 3
- 2. Administration Data 3
- 3. Guidance Standard 4
- 4. Equipment Under Test (EUT) 4
 - 4.1 General Information 4
- 5. Antenna Location 5
- 6. Simultaneous Transmission Analysis 7
 - 6.1 Body Exposure Conditions 8
 - 6.2 SPLSR Evaluation and Analysis 11
- 7. References 13

Revision History

| REPORT NO. | VERSION | DESCRIPTION | ISSUED DATE |
|-------------|---------|--|---------------|
| FA482025-07 | Rev. 01 | Based on original SAR report, FCC ID: B94HNI22CHW736, Report No.: FA482025 Rev.02 includes simultaneous transmission analysis with FCC ID: PD917265NG, Report No.: SAR.20141107. | Feb. 27, 2015 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Hewlett-Packard Company, Tablet PC, HSTNN-I22C**, are as follows.

| Frequency Band | Equipment Class | Exposure Position | Highest Reported Simultaneous Transmission 1g-SAR (W/kg) |
|------------------|-----------------|---------------------|--|
| WCDMA II | PCB | Edge 1 (1.2 cm Gap) | 1.44 |
| 2.4GHz WLAN | DTS | | |
| WCDMA II | PCB | Edge 1 (1.2 cm Gap) | 1.45 |
| 2.4GHz Bluetooth | DSS | | |

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003.

2. Administration Data

| Testing Laboratory | |
|--------------------|---|
| Test Site | SPORTON INTERNATIONAL INC. |
| Test Site Location | No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978 |

| Applicant | |
|--------------|---|
| Company Name | Hewlett-Packard Company |
| Address | 11445 Compaq Center Drive W Houston, TX 77070 |

| Manufacturer | |
|--------------|--|
| Company Name | Inventec Corporation |
| Address | Inventec Building, No.66 Hou-Kang Street Shilin District, Taipei 11170, Taiwan |



3. Guidance Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- FCC KDB 865664 D02 SAR Reporting v01r01
- FCC KDB 447498 D01 General RF Exposure Guidance v05r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r01
- FCC KDB 941225 D01 3G SAR Procedures v03


4. Equipment Under Test (EUT)


4.1 General Information

| Product Feature & Specification | |
|---|--|
| Equipment Name | Tablet PC |
| Brand Name | HP |
| Model Name | HSTNN-I22C |
| FCC ID | B94HNI22CHW736 |
| Integrated Module | Brand Name: Huawei Model Name: MU736 |
| IMEI Code | 355870050013231 |
| Wireless Technology and Frequency Range | GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz |
| Mode | <ul style="list-style-type: none"> • GPRS/EGPRS • RMC 12.2Kbps • HSDPA • HSUPA |
| EUT Stage | Identical Prototype |
| Remark: | |
| 1. The below table WLAN module are also integrated into this host and the 2.4GHz WLAN and Bluetooth SAR testing results are also used perform transmission simultaneous analysis. | |

| Module Information | | | | |
|------------------------|-------------------|--|------------|------------|
| Integrated WLAN Module | Brand Name | Intel | | |
| | Model Name | Intel® Tri-Band Wireless-AC 17265 (Model 17265NGW, 17265NGW LC) | | |
| | FCC ID | PD917265NG | | |
| | Report No | SAR.20141107 | | |
| | Final Action Date | 02/18/2015 | | |
| | Mode | <ul style="list-style-type: none"> • 802.11 a/b/g/n/ac • Bluetooth | | |
| Battery Option | | | | |
| Battery | Brand Name | hp | Model Name | HSTNN-DB5Z |
| | Power Rating | 7.4Vdc, 4250mAh | Type | Li-ion |

5. Antenna Location

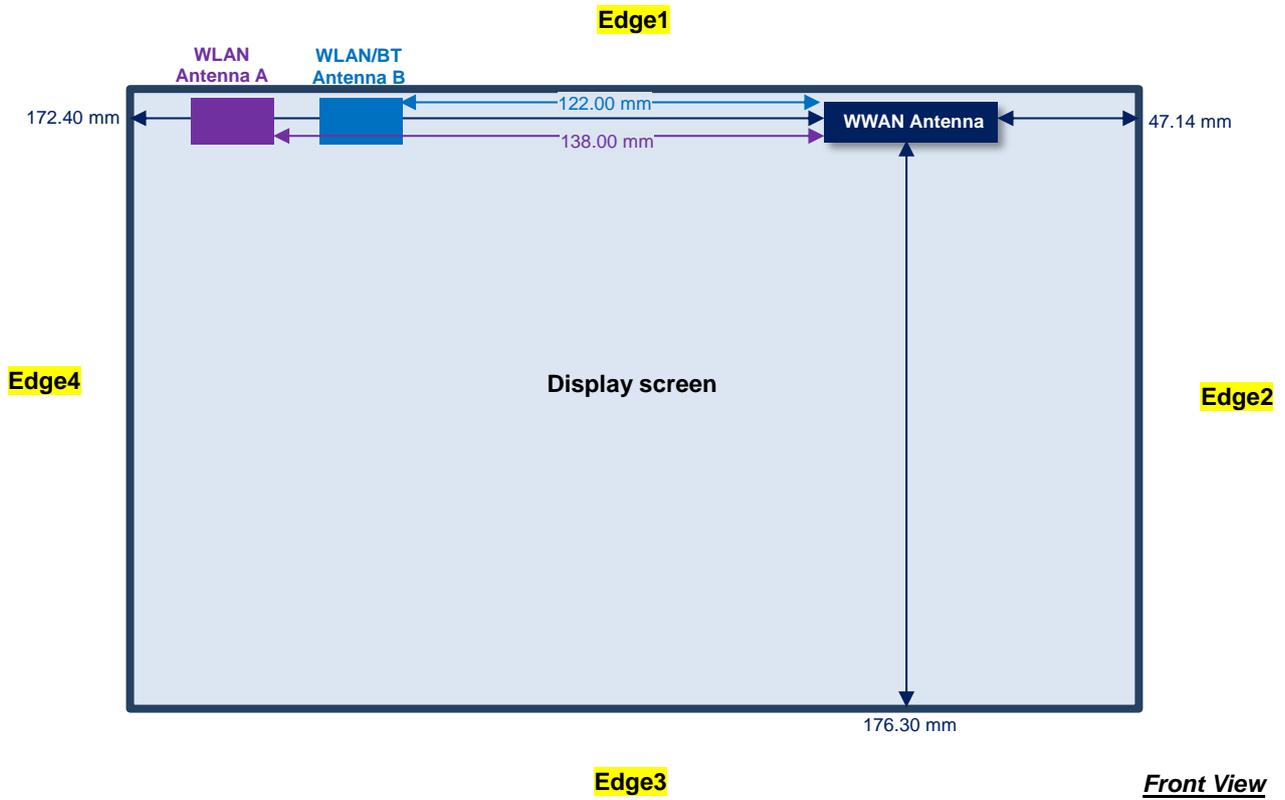

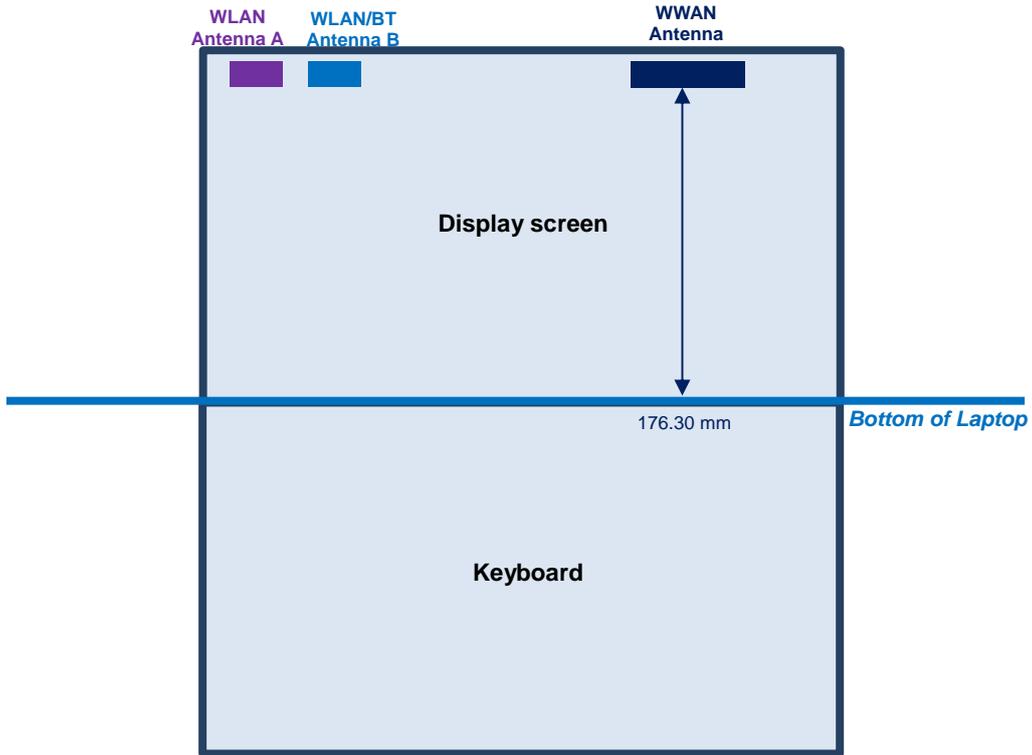



6. Simultaneous Transmission Analysis

| NO. | Simultaneous Transmission Configurations | Portable Tablet | Note |
|-----|--|-----------------|-----------------------|
| | | Body | |
| 1. | GPRS/EDGE(Data) + WLAN2.4GHz(data) | Yes | Hotspot / WiFi Direct |
| 2. | WCDMA(Data) + WLAN2.4GHz(data) | Yes | Hotspot / WiFi Direct |
| 3. | GPRS/EDGE(Data) + Bluetooth(data) | Yes | |
| 4. | WCDMA(Data) + Bluetooth(data) | Yes | |
| 5. | GPRS/EDGE(Data) + WLAN5GHz (data) | No | |
| 6. | WCDMA(Data) + WLAN5GHz (data) | No | |

General Note:

1. The below table WLAN module is also integrated into this host and the 2.4GHz WLAN and Bluetooth SAR testing results are also used perform transmission simultaneous analysis.
2. The worst case 2.4 GHz WLAN and Bluetooth SAR for each configuration in below each WLAN report was used for SAR summation; therefore, the following summations represent the absolute worst cases for simultaneous transmission with WLAN and Bluetooth.
3. The worst case WLAN and Bluetooth reported SAR for each configuration was used for SAR summation. Therefore, the following summations represent the absolute worst cases for simultaneous transmission with WLAN and Bluetooth.
4. For simultaneous transmission analysis for exposure position of edge1 1.2cm, Curved surface of Edge1 1.2cm and bottom face 1.2cm, WLAN SAR tested at 0mm separation is worse and the test data is used for conservative SAR summation.
5. The Scaled SAR summation is calculated based on the same configuration and test position.
6. Per KDB 447498 D01v05r02, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
 - v) The SPLSR calculated results please refer to section 6.2.

| Module Information | | |
|------------------------|-------------------|--|
| Integrated WLAN Module | Brand Name | Intel |
| | Model Name | Intel® Tri-Band Wireless-AC 17265 (Model 17265NGW, 17265NGW LC) |
| | FCC ID | PD917265NG |
| | Report No | SAR.20141107 |
| | Final Action Date | 02/18/2015 |
| | Mode | <ul style="list-style-type: none"> • 802.11 a/b/g/n/ac • Bluetooth |

6.1 Body Exposure Conditions

| WWAN Band | | Exposure Position | 1 | 2 | 1+2 Summed SAR (W/kg) | SPLSR Result | Case No | |
|-----------------------------------|---------------------------------|-----------------------------------|--------------------|-----------------------|-----------------------|--------------|---------|--------|
| | | | WWAN | 2.4GHz WLAN Antenna A | | | | |
| | | | SAR (W/kg) | SAR (W/kg) | | | | |
| GSM | GSM850 | Bottom Face at 0cm | 1.404 | 1.080 | 2.48 | 0.03 | Case 1 | |
| | | Edge1 at 0cm | 0.884 | 0.330 | 1.21 | | | |
| | | Curved surface of Edge 1 at 0cm | 1.091 | | 1.09 | | | |
| | | Bottom Face at 1.2 cm | 0.531 | 1.080 | 1.61 | 0.01 | Case 2 | |
| | | Edge1 at 1.2 cm | 0.246 | 0.330 | 0.58 | | | |
| | | Curved surface of Edge 1 at 1.2cm | 0.459 | | 0.46 | | | |
| | GSM1900 | Edge2 at 0cm | 0.196 | | 0.20 | | | |
| | | Bottom Face at 0cm | 1.381 | 1.080 | 2.46 | 0.03 | Case 3 | |
| | | Edge1 at 0cm | 0.772 | 0.330 | 1.10 | | | |
| | | Curved surface of Edge 1 at 0cm | 0.823 | | 0.82 | | | |
| | | Bottom Face at 1.2 cm | 0.275 | 1.080 | 1.36 | | | |
| | | Edge1 at 1.2 cm | 0.444 | 0.330 | 0.77 | | | |
| | | Curved surface of Edge 1 at 1.2cm | 0.433 | | 0.43 | | | |
| | | Edge2 at 0cm | 0.045 | | 0.05 | | | |
| WCDMA | Band V | Bottom Face at 0cm | 1.125 | 1.080 | 2.21 | 0.02 | Case 4 | |
| | | Edge1 at 0cm | 0.875 | 0.330 | 1.21 | | | |
| | | Curved surface of Edge 1 at 0cm | 1.070 | | 1.07 | | | |
| | | Bottom Face at 1.2 cm | 0.577 | 1.080 | 1.66 | 0.02 | Case 5 | |
| | | Edge1 at 1.2 cm | 0.313 | 0.330 | 0.64 | | | |
| | | Curved surface of Edge 1 at 1.2cm | 0.435 | | 0.44 | | | |
| | Band IV | Edge2 at 0cm | 0.225 | | 0.23 | | | |
| | | Bottom Face at 0cm | 1.273 | 1.080 | 2.35 | 0.03 | Case 6 | |
| | | Edge1 at 0cm | 0.923 | 0.330 | 1.25 | | | |
| | | Curved surface of Edge 1 at 0cm | 1.062 | | 1.06 | | | |
| | | Bottom Face at 1.2 cm | 0.668 | 1.080 | 1.75 | 0.02 | Case 7 | |
| | | Edge1 at 1.2 cm | 1.236 | 0.330 | 1.57 | | | |
| | | Curved surface of Edge 1 at 1.2cm | 1.202 | | 1.20 | | | |
| | | Edge2 at 0cm | 0.043 | | 0.04 | | | |
| | | Band II | Bottom Face at 0cm | 1.397 | 1.080 | 2.48 | 0.03 | Case 8 |
| | | | Edge1 at 0cm | 0.780 | 0.330 | 1.11 | | |
| | Curved surface of Edge 1 at 0cm | | 0.750 | | 0.75 | | | |
| | Bottom Face at 1.2 cm | | 0.830 | 1.080 | 1.91 | 0.02 | Case 9 | |
| Edge1 at 1.2 cm | 1.437 | | 0.330 | 1.77 | 0.02 | Case 10 | | |
| Curved surface of Edge 1 at 1.2cm | 1.350 | | | 1.35 | | | | |
| | Edge2 at 0cm | 0.170 | | 0.17 | | | | |




| WWAN Band | | Exposure Position | 1 | 3 | 1+3 Summed SAR (W/kg) | SPLSR Result | Case No |
|-----------|---------|-----------------------------------|-----------------|----------------------------------|-----------------------|--------------|---------|
| | | | WWAN SAR (W/kg) | 2.4GHz WLAN Antenna B SAR (W/kg) | | | |
| GSM | GSM850 | Bottom Face at 0cm | 1.404 | 0.460 | 1.86 | 0.02 | Case 11 |
| | | Edge1 at 0cm | 0.884 | 0.140 | 1.02 | | |
| | | Curved surface of Edge 1 at 0cm | 1.091 | | 1.09 | | |
| | | Bottom Face at 1.2 cm | 0.531 | 0.460 | 0.99 | | |
| | | Edge1 at 1.2 cm | 0.246 | 0.140 | 0.39 | | |
| | | Curved surface of Edge 1 at 1.2cm | 0.459 | | 0.46 | | |
| | | Edge2 at 0cm | 0.196 | | 0.20 | | |
| | GSM1900 | Bottom Face at 0cm | 1.381 | 0.460 | 1.84 | 0.02 | Case 12 |
| | | Edge1 at 0cm | 0.772 | 0.140 | 0.91 | | |
| | | Curved surface of Edge 1 at 0cm | 0.823 | | 0.82 | | |
| | | Bottom Face at 1.2 cm | 0.275 | 0.460 | 0.74 | | |
| | | Edge1 at 1.2 cm | 0.444 | 0.140 | 0.58 | | |
| | | Curved surface of Edge 1 at 1.2cm | 0.433 | | 0.43 | | |
| | | Edge2 at 0cm | 0.045 | | 0.05 | | |
| | | | | | | | |
| WCDMA | Band V | Bottom Face at 0cm | 1.125 | 0.460 | 1.59 | | |
| | | Edge1 at 0cm | 0.875 | 0.140 | 1.02 | | |
| | | Curved surface of Edge 1 at 0cm | 1.070 | | 1.07 | | |
| | | Bottom Face at 1.2 cm | 0.577 | 0.460 | 1.04 | | |
| | | Edge1 at 1.2 cm | 0.313 | 0.140 | 0.45 | | |
| | | Curved surface of Edge 1 at 1.2cm | 0.435 | | 0.44 | | |
| | | Edge2 at 0cm | 0.225 | | 0.23 | | |
| | Band IV | Bottom Face at 0cm | 1.273 | 0.460 | 1.73 | 0.02 | Case 13 |
| | | Edge1 at 0cm | 0.923 | 0.140 | 1.06 | | |
| | | Curved surface of Edge 1 at 0cm | 1.062 | | 1.06 | | |
| | | Bottom Face at 1.2 cm | 0.668 | 0.460 | 1.13 | | |
| | | Edge1 at 1.2 cm | 1.236 | 0.140 | 1.38 | | |
| | | Curved surface of Edge 1 at 1.2cm | 1.202 | | 1.20 | | |
| | | Edge2 at 0cm | 0.043 | | 0.04 | | |
| | Band II | Bottom Face at 0cm | 1.397 | 0.460 | 1.86 | 0.02 | Case 14 |
| | | Edge1 at 0cm | 0.780 | 0.140 | 0.92 | | |
| | | Curved surface of Edge 1 at 0cm | 0.750 | | 0.75 | | |
| | | Bottom Face at 1.2 cm | 0.830 | 0.460 | 1.29 | | |
| | | Edge1 at 1.2 cm | 1.437 | 0.140 | 1.58 | | |
| | | Curved surface of Edge 1 at 1.2cm | 1.350 | | 1.35 | | |
| | | Edge2 at 0cm | 0.170 | | 0.17 | | |



| WWAN Band | | Exposure Position | 1 | 4 | 1+4 Summed SAR (W/kg) | SPLSR Result | Case No |
|-----------------------------------|--------------|-----------------------------------|-----------------|---------------------------------------|-----------------------|--------------|---------|
| | | | WWAN SAR (W/kg) | 2.4GHz Bluetooth Antenna B SAR (W/kg) | | | |
| GSM | GSM850 | Bottom Face at 0cm | 1.404 | 0.010 | 1.41 | | |
| | | Edge1 at 0cm | 0.884 | 0.010 | 0.89 | | |
| | | Curved surface of Edge 1 at 0cm | 1.091 | | 1.09 | | |
| | | Bottom Face at 1.2 cm | 0.531 | 0.010 | 0.54 | | |
| | | Edge1 at 1.2 cm | 0.246 | 0.010 | 0.26 | | |
| | | Curved surface of Edge 1 at 1.2cm | 0.459 | | 0.46 | | |
| | | Edge2 at 0cm | 0.196 | | 0.20 | | |
| | GSM1900 | Bottom Face at 0cm | 1.381 | 0.010 | 1.39 | | |
| | | Edge1 at 0cm | 0.772 | 0.010 | 0.78 | | |
| | | Curved surface of Edge 1 at 0cm | 0.823 | | 0.82 | | |
| | | Bottom Face at 1.2 cm | 0.275 | 0.010 | 0.29 | | |
| | | Edge1 at 1.2 cm | 0.444 | 0.010 | 0.45 | | |
| | | Curved surface of Edge 1 at 1.2cm | 0.433 | | 0.43 | | |
| | | Edge2 at 0cm | 0.045 | | 0.05 | | |
| WCDMA | Band V | Bottom Face at 0cm | 1.125 | 0.010 | 1.14 | | |
| | | Edge1 at 0cm | 0.875 | 0.010 | 0.89 | | |
| | | Curved surface of Edge 1 at 0cm | 1.070 | | 1.07 | | |
| | | Bottom Face at 1.2 cm | 0.577 | 0.010 | 0.59 | | |
| | | Edge1 at 1.2 cm | 0.313 | 0.010 | 0.32 | | |
| | | Curved surface of Edge 1 at 1.2cm | 0.435 | | 0.44 | | |
| | | Edge2 at 0cm | 0.225 | | 0.23 | | |
| | Band IV | Bottom Face at 0cm | 1.273 | 0.010 | 1.28 | | |
| | | Edge1 at 0cm | 0.923 | 0.010 | 0.93 | | |
| | | Curved surface of Edge 1 at 0cm | 1.062 | | 1.06 | | |
| | | Bottom Face at 1.2 cm | 0.668 | 0.010 | 0.68 | | |
| | | Edge1 at 1.2 cm | 1.236 | 0.010 | 1.25 | | |
| | | Curved surface of Edge 1 at 1.2cm | 1.202 | | 1.20 | | |
| | | Edge2 at 0cm | 0.043 | | 0.04 | | |
| | Band II | Bottom Face at 0cm | 1.397 | 0.010 | 1.41 | | |
| | | Edge1 at 0cm | 0.780 | 0.010 | 0.79 | | |
| | | Curved surface of Edge 1 at 0cm | 0.750 | | 0.75 | | |
| | | Bottom Face at 1.2 cm | 0.830 | 0.010 | 0.84 | | |
| Edge1 at 1.2 cm | | 1.437 | 0.010 | 1.45 | | | |
| Curved surface of Edge 1 at 1.2cm | | 1.350 | | 1.35 | | | |
| | Edge2 at 0cm | 0.170 | | 0.17 | | | |

6.2 SPLSR Evaluation and Analysis

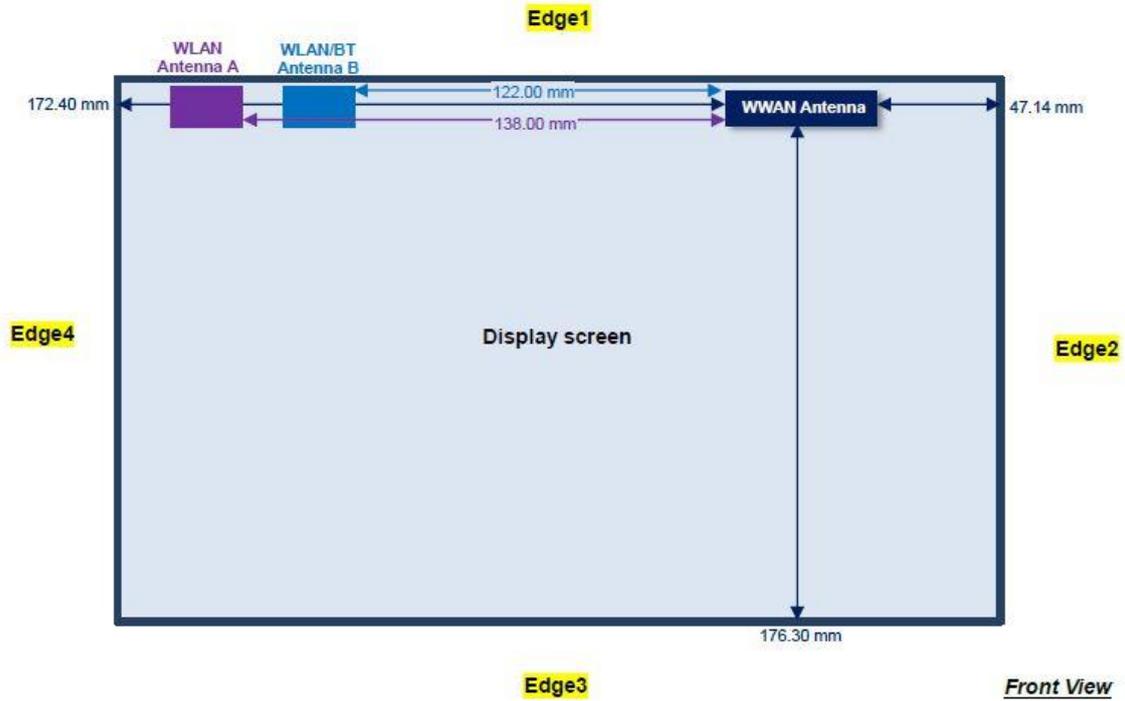

General Note:

1. The WLAN/Bluetooth module of FCC ID: PD917265NG would be integrated into this host, and the identical WLAN antenna is used for the WLAN/BT module integration.
2. According the antenna location, for SPLSR analysis of colocation with PD917265NG, the minimum distances between each antenna pair was used for conservative SPLSR calculation.
3. $SPLSR = (SAR_1 + SAR_2)^{1.5} / (min. \text{ separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary

| Case 1 | Band | Position | SAR (W/kg) | Gap | Minimum Distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|--------|--------------|--------------------|------------|------|-----------------------|-------------------|---------------|------------------|
| | 2.4GHz Ant A | | | (cm) | | | | |
| | GSM850 | Bottom Face at 0cm | 1.404 | 0 | 138.0 | 2.48 | 0.03 | Not required |
| | 2.4GHz Ant A | | 1.080 | 0 | | | | |

| Case 2 | Band | Position | SAR (W/kg) | Gap | Minimum Distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|--------|--------------|-----------------------|------------|------|-----------------------|-------------------|---------------|------------------|
| | 2.4GHz Ant A | | | (cm) | | | | |
| | GSM850 | Bottom Face at 1.2 cm | 0.531 | 1.2 | 138.0 | 1.61 | 0.01 | Not required |
| | 2.4GHz Ant A | | 1.080 | 0 | | | | |

| Case 3 | Band | Position | SAR (W/kg) | Gap | Minimum Distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|--------|--------------|--------------------|------------|------|-----------------------|-------------------|---------------|------------------|
| | 2.4GHz Ant A | | | (cm) | | | | |
| | GSM1900 | Bottom Face at 0cm | 1.381 | 0 | 138.0 | 2.46 | 0.03 | Not required |
| | 2.4GHz Ant A | | 1.080 | 0 | | | | |

| Case 4 | Band | Position | SAR (W/kg) | Gap | Minimum Distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|--------|--------------|--------------------|------------|------|-----------------------|-------------------|---------------|------------------|
| | 2.4GHz Ant A | | | (cm) | | | | |
| | WCDMA V | Bottom Face at 0cm | 1.125 | 0 | 138.0 | 2.21 | 0.02 | Not required |
| | 2.4GHz Ant A | | 1.080 | 0 | | | | |



| Case | Band | Position | SAR (W/kg) | Gap | Minimum Distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|---------|--------------|-----------------------|------------|------|-----------------------|-------------------|---------------|------------------|
| | | | | (cm) | | | | |
| Case 5 | WCDMA V | Bottom Face at 1.2 cm | 0.577 | 1.2 | 138.0 | 1.66 | 0.02 | Not required |
| | 2.4GHz Ant A | | 1.080 | 0 | | | | |
| Case 6 | WCDMA IV | Bottom Face at 0cm | 1.273 | 0 | 138.0 | 2.35 | 0.03 | Not required |
| | 2.4GHz Ant A | | 1.080 | 0 | | | | |
| Case 7 | WCDMA IV | Bottom Face at 1.2 cm | 0.668 | 1.2 | 138.0 | 1.75 | 0.02 | Not required |
| | 2.4GHz Ant A | | 1.080 | 0 | | | | |
| Case 8 | WCDMA II | Bottom Face at 0cm | 1.397 | 0 | 138.0 | 2.48 | 0.03 | Not required |
| | 2.4GHz Ant A | | 1.080 | 0 | | | | |
| Case 9 | WCDMA II | Bottom Face at 1.2 cm | 0.830 | 1.2 | 138.0 | 1.91 | 0.02 | Not required |
| | 2.4GHz Ant A | | 1.080 | 0 | | | | |
| Case 10 | WCDMA II | Edge1 at 1.2 cm | 1.437 | 1.2 | 138.0 | 1.77 | 0.02 | Not required |
| | 2.4GHz Ant A | | 0.330 | 0 | | | | |
| Case 11 | GSM850 | Bottom Face at 0cm | 1.404 | 0 | 122.0 | 1.86 | 0.02 | Not required |
| | 2.4GHz Ant B | | 0.460 | 0 | | | | |
| Case 12 | GSM1900 | Bottom Face at 0cm | 1.381 | 0 | 122.0 | 1.84 | 0.02 | Not required |
| | 2.4GHz Ant B | | 0.460 | 0 | | | | |
| Case 13 | WCDMA IV | Bottom Face at 0cm | 1.273 | 0 | 122.0 | 1.73 | 0.02 | Not required |
| | 2.4GHz Ant B | | 0.460 | 0 | | | | |
| Case 14 | WCDMA II | Bottom Face at 0cm | 1.397 | 0 | 122.0 | 1.86 | 0.02 | Not required |
| | 2.4GHz Ant B | | 0.460 | 0 | | | | |



7. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 447498 D01 v05r02, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Feb 2014
- [6] FCC KDB 941225 D01 v03, "3G SAR MEAUREMENT PROCEDURES", Oct 2014
- [7] FCC KDB 616217 D04 v01r01, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", May 2013
- [8] FCC KDB 865664 D01 v01r03, "SAR Measurement Requirements for 100 MHz to 6 GHz", Feb 2014.
- [9] FCC KDB 865664 D02 v01r01, "RF Exposure Compliance Reporting and Documentation Considerations" May 2013.