

Regulatory WWAN Antenna Information

Platform information						
Brand	ODM	Platform model name	Platform type (ex: regular NB, convertible PC, AIO...etc)			*SAR minimum separation (mm)
HP Inc.	Inventec	Starfox (HSN-I50C)	Regular NB			9.4mm
Antenna information						Maximum Peak gain
Vendor	Type	Antenna Part number (Ant5 TX/RX)	Antenna Part number (Ant6 RX)	Antenna Part number (Ant7 RX)	Antenna Part number (Ant8 TX/RX)	Example:1850MHz (Choice TX high peak gain)
WNC	PIFA	6036B0303501 (81EABL15.G31)	6036B0302901 (81EABL15.G32)	6036B0302601 (81EABL15.G33)	6036B0302501 (81EABL15.G34)	2.41dBi
Module information						
Model	Form factor and suffixes (NGW/ HMW AND AN/ NB/ BN....)					
Kavalan	Fibocom FM350-GL WWAN 4x4 5G NR radio module					

Antenna Sample / Antenna Data Requirements for worldwide regulatory approval

Section	Description of Required OEM / ODM Antenna Information	US / IC	EU	Japan	Taiwan	S.Korea
1A	Part Number for Antenna Assembly	Required	Required	Required	Required	Required
1B	Antenna Manufacturer Name	Required	Required	Required	Required	Required
1C	Description of Antenna Type	Required	N/A	N/A	N/A	N/A
1D	Tx antenna Gain (Peak Gain W/ cable loss) *	Required	Required	Required	Required	Required
2	Dimensioned Photographs and Drawings of Tx and Rx antennas	Required	Required	Required	Required	Required
3	Radiation patterns of antennas loaded in the host platform.	N/A	Required	Required	Required	N/A
4	Platform model name / number - correlated to antenna manufacturer and antenna part number	Required	Required	Desired	Required	Desired
5	Photograph(s) or Drawings showing location of antennas in platform. (S. Korea requires photographs of antennas for approval submission). Taiwan requires pictures of each antenna type shown in the system.	Required	Required	Desired	<u>Required (Photos)</u>	<u>Required (Photos)</u>
6	Mech. drawings / photos with dimensions of antenna locations and distance from end-user (For evaluation of SAR testing requirement).	Required	N/A	N/A	N/A	N/A
7	Photograph(s) or Drawings showing the location of all antennas (WLAN, other) and distance between those transmitting antennas. Information will be used to evaluate whether co-location testing is required.	Required	N/A	N/A	N/A	N/A
8	Local representative contact information for LMA/ PARS process.	Required	N/A	N/A	N/A	N/A

Antenna Information

Section 1. Antenna Assembly Specifications

Communication System	Band	Frequency(MHz) from low to high spectrum		1A Part Number for Antenna Assembly	1B Antenna Manufacturer Name	1C Description of Antenna Type	1D Tx Antenna Gain (dBi) Ant5
WCDMA/ LTE/5G NR FR1	1	1920	1980	Ant5 : 81EABL15.G31	WNC	PIFA	-1.07
WCDMA/ LTE/5G NR FR1	2	1850	1910				-0.49
LTE/5G NR FR1	3	1710	1785				0.11
WCDMA/ LTE	4	1710	1755				0.08
WCDMA/ LTE/5G NR FR1	5	824	849				-2.53
LTE/5G NR FR1	7	2500	2570				-1.71
WCDMA/ LTE/5G NR FR1	8	880	915				-2.36
LTE	12	699	716				0.11
LTE	13	777	787				-2.05
LTE	14	788	798				-2.08
LTE	17	704	716				0.11
LTE	18	815	830				-2.41
LTE	19	830	845				-2.93
LTE/5G NR FR1	20	832	862				-3.04
LTE/5G NR FR1	25	1850	1915				-0.49
LTE	26	814	849				-2.41
LTE/5G NR FR1	28	703	748				0.36
LTE/5G NR FR1	30	2305	2315				-1.97
LTE	34	2010	2025				-1.52
LTE/5G NR FR1	38	2570	2620				-1.84
LTE	39	1880	1920				-0.49
LTE/5G NR FR1	40	2300	2400				-1.97
LTE/5G NR FR1	41	2496	2690				-1.57
LTE	42	3400	3600				-0.20
LTE	43	3600	3800				-0.98
LTE/5G NR FR1	48	3550	3700				-0.98
LTE/5G NR FR1	66	1710	1780				0.11
LTE/5G NR FR1	71	663	698				-1.22
5G NR FR1	77	3300	4200				-0.20
5G NR FR1	78	3300	3800				-0.20
5G NR FR1	79	4400	5000	-1.13			

Communication System	Band	Frequency(MHz) from low to high spectrum		1A Part Number for Antenna Assembly	1B Antenna Manufacturer Name	1C Description of Antenna Type	1D Tx Antenna Gain (dBi) Ant8
5G NR FR1	1	1920	1980	Ant8 : 81EABL15.G34	WNC	PIFA	-1.41
5G NR FR1	2	1850	1910				-1.78
5G NR FR1	3	1710	1785				-1.61
5G NR FR1	5	824	849				-6.54
5G NR FR1	7	2500	2570				0.64
5G NR FR1	25	1850	1915				-1.78
5G NR FR1	30	2305	2315				-0.82
5G NR FR1	38	2570	2620				0.64
5G NR FR1	40	2300	2400				-0.25
5G NR FR1	41	2496	2690				0.94
5G NR FR1	48	3550	3700				1.97
5G NR FR1	66	1710	1780				-1.61
5G NR FR1	77	3300	4200				2.41
5G NR FR1	78	3300	3800				2.39
5G NR FR1	79	4400	5000				2.22


- Antenna Peak Gain required being test in system basis.

Section 2. Dimensioned Photos or Drawings of Antennas

	Ant supplier	Part number	Drawing	Photo
Ant5	81EABL15.G31	6036B0303501	V	V
Ant6	81EABL15.G32	6036B0302901	V	V
Ant7	81EABL15.G33	6036B0302601	V	V
Ant8	81EABL15.G34	6036B0302501	V	V


Ant5 Dimensioned Drawing:

Example

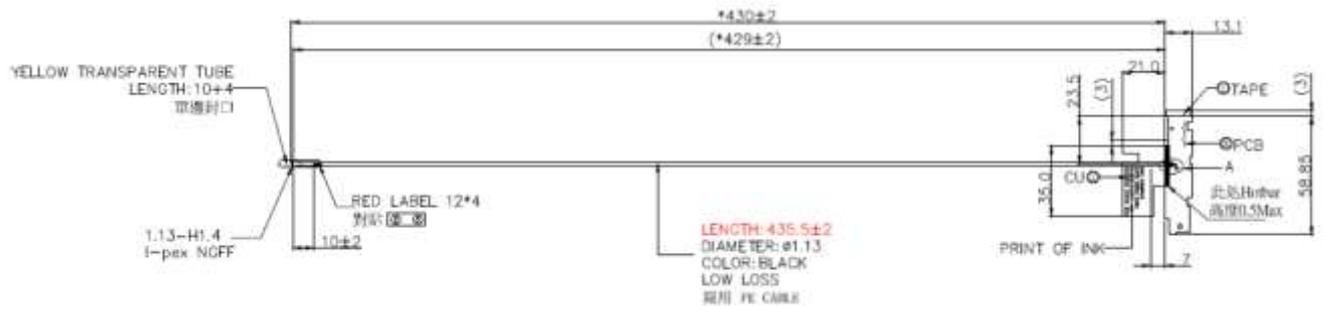


Ant5 Photo:


Example

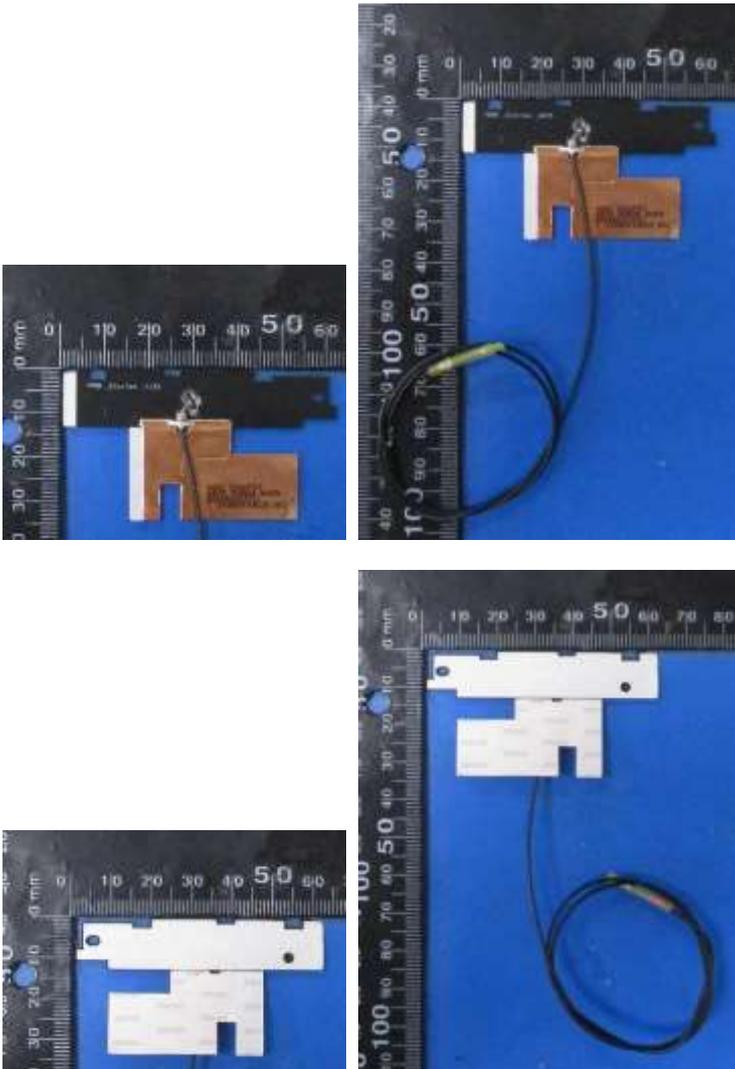


Ant6 Dimensioned Drawing:

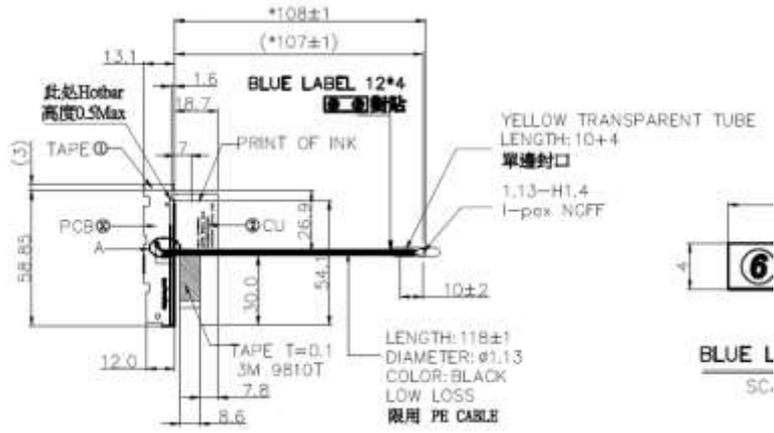


Ant6 Photo:

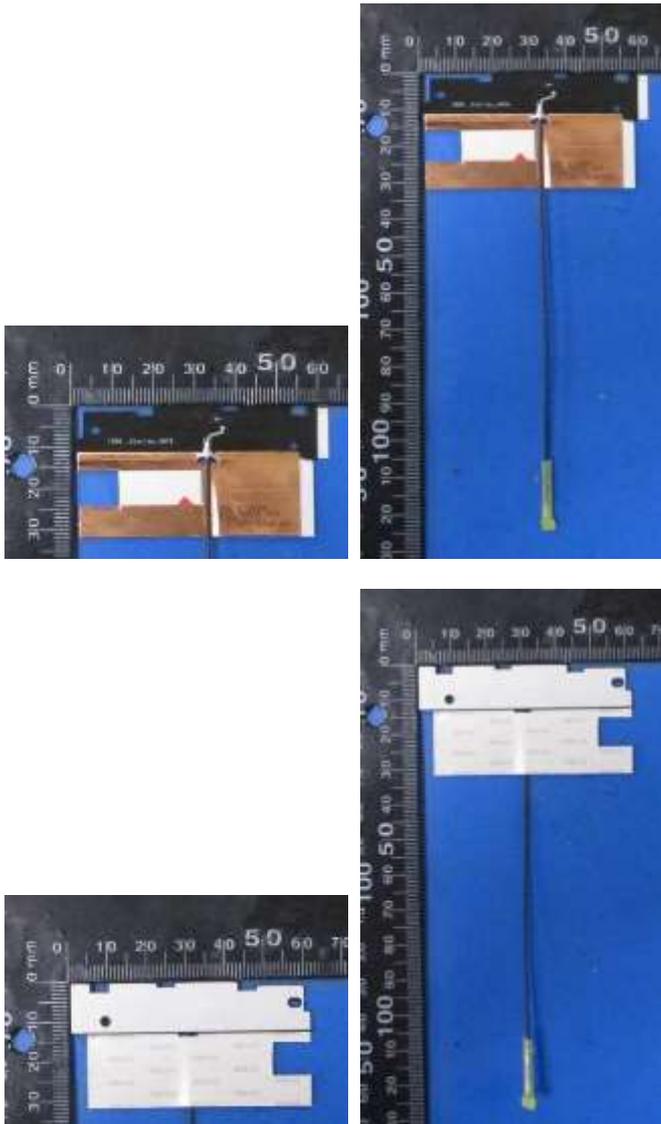


Ant7 Dimensioned Drawing:

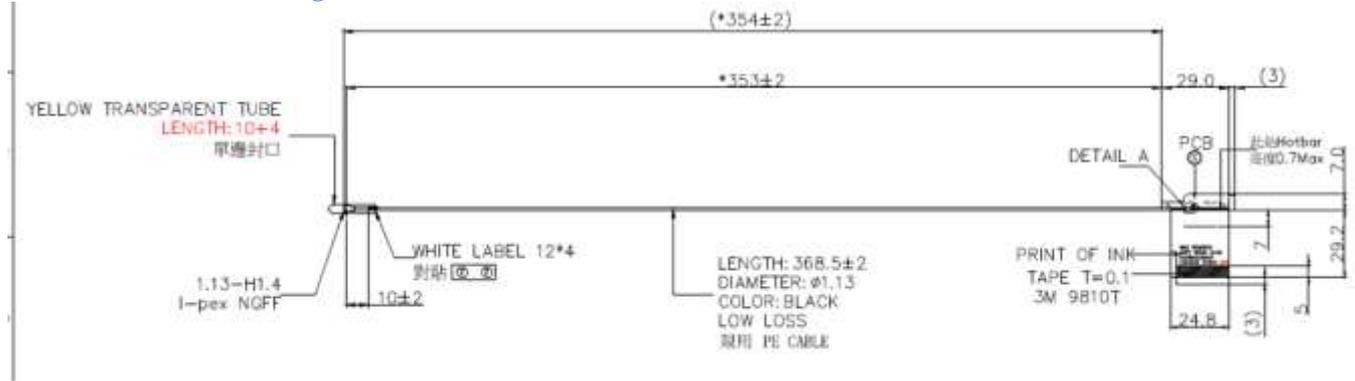


Ant7 Photo:

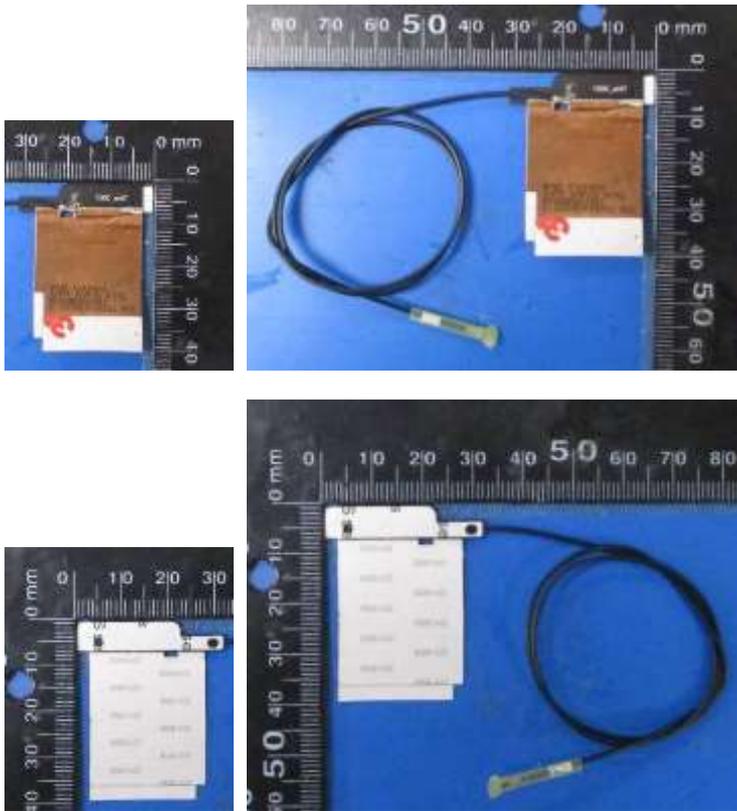

Ant8 Dimensioned Drawing:

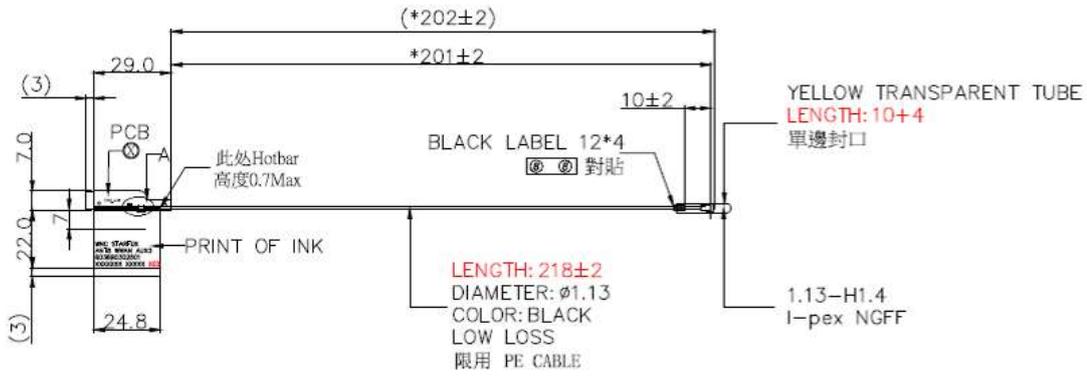

Ant8 Photo:

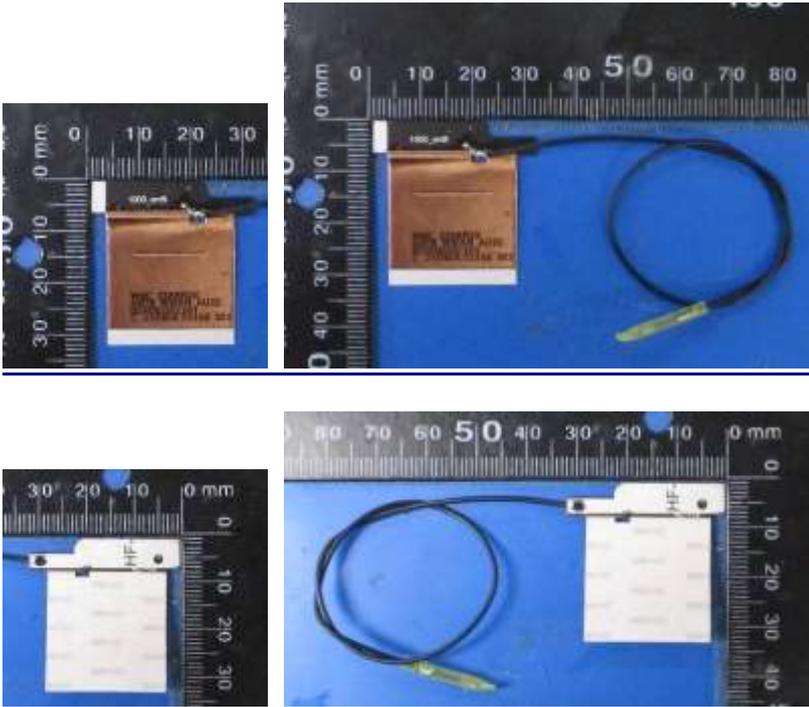


Section 3. Radiation characteristics of antennae Loaded in Host Platform

Ant5		
Frequency (MHz)	H	V
814	-2.41	-7.27
832	-3.04	-7.59
837	-3.07	-7.55
845	-3.15	-7.61
849	-3.17	-7.65
880	-3.12	-8.87
894	-2.64	-8.78
915	-2.36	-8.35
1710	0.05	-8.43
1750	0.08	-9.84
1780	0.11	-11.13
1785	0.04	-11.29
1880	-0.71	-12.51
1900	-0.49	-11.73
1920	-1.07	-12.38
1950	-1.08	-12.96
1980	-1.17	-13.27
2496	-1.76	-6.85
2595	-2.26	-6.81
2690	-1.57	-6.83
3300	-1.12	-3.73
3400	-0.20	-3.21
3500	-0.76	-3.04
3600	-1.10	-3.05
3750	-1.44	-3.40
4200	-4.55	-1.56
4400	-4.16	-1.13
4800	-6.27	-1.93
5000	-6.58	-2.20


Ant8		
Frequency (MHz)	H	V
1710	-1.61	-10.14
1750	-2.48	-10.44
1780	-2.06	-10.47
1785	-1.92	-10.39
1880	-1.86	-11.16
1900	-2.26	-10.98
1920	-2.02	-10.86
1950	-2.07	-12.05
1980	-1.41	-13.16
2496	-0.36	-14.03
2595	0.28	-15.26
2690	0.62	-13.76
3300	2.11	-11.10
3400	1.76	-11.57
3500	2.37	-10.66
3600	1.80	-9.22
3750	1.94	-8.46
4200	1.66	-11.02
4400	1.93	-10.56
4800	2.15	-7.00
5000	1.39	-6.84

- The listed frequency 2D radiation pattern is required

• [Ant5:](#)
Example

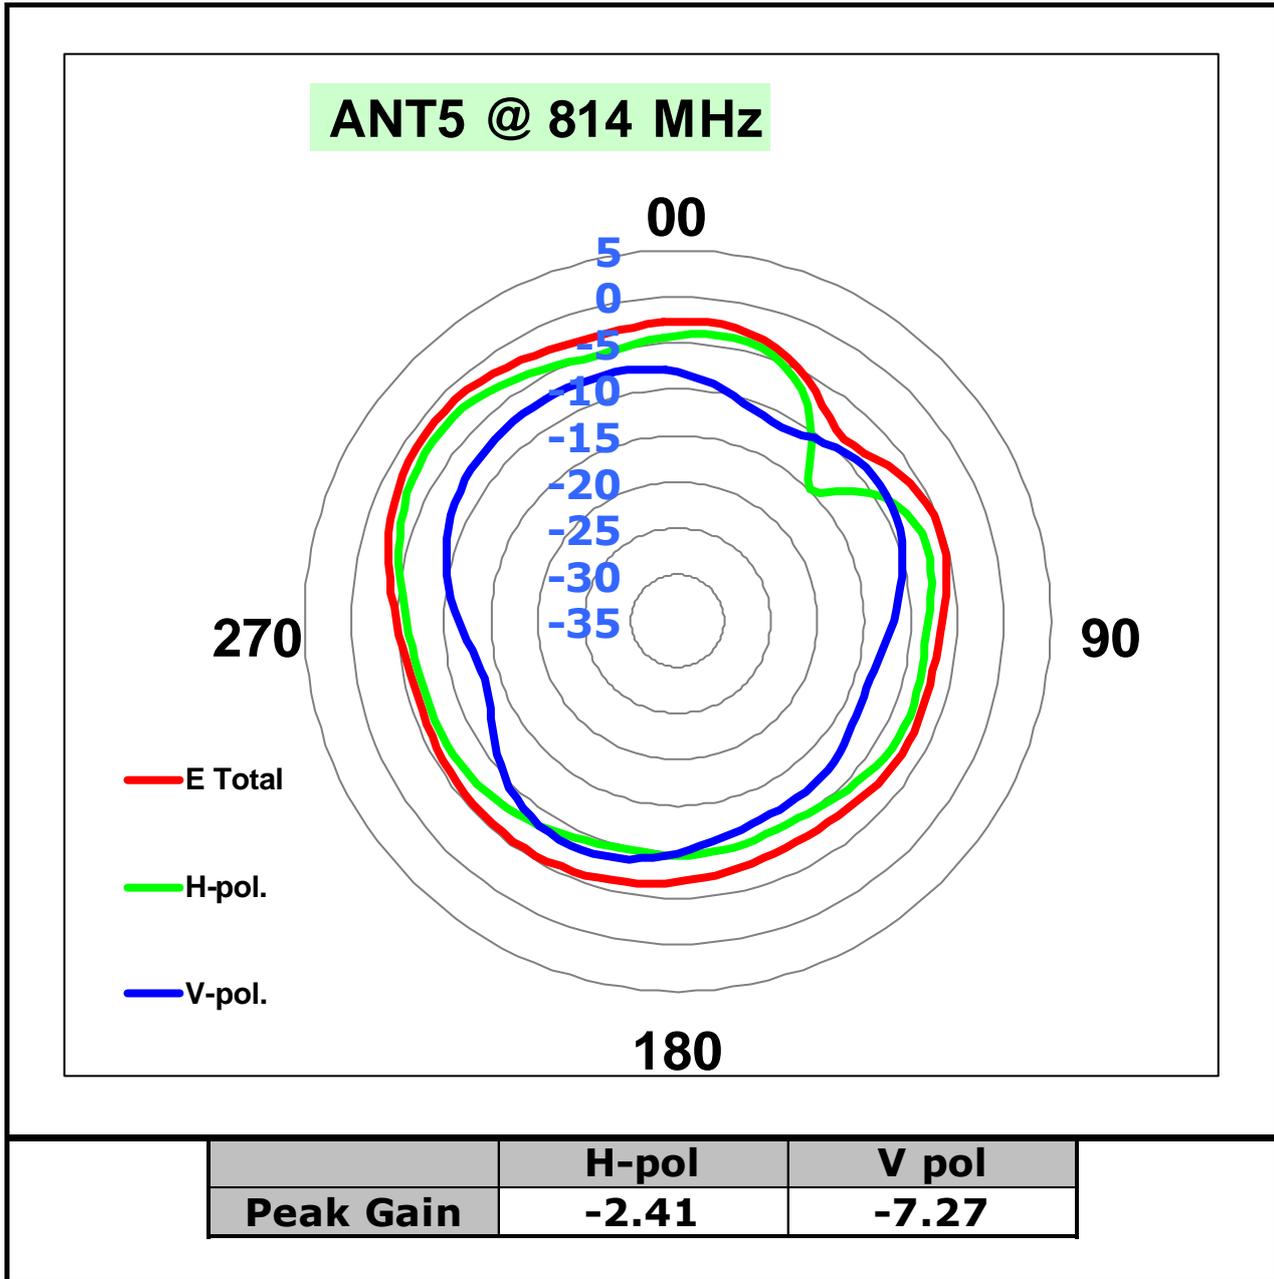


ANT5 @ 832 MHz

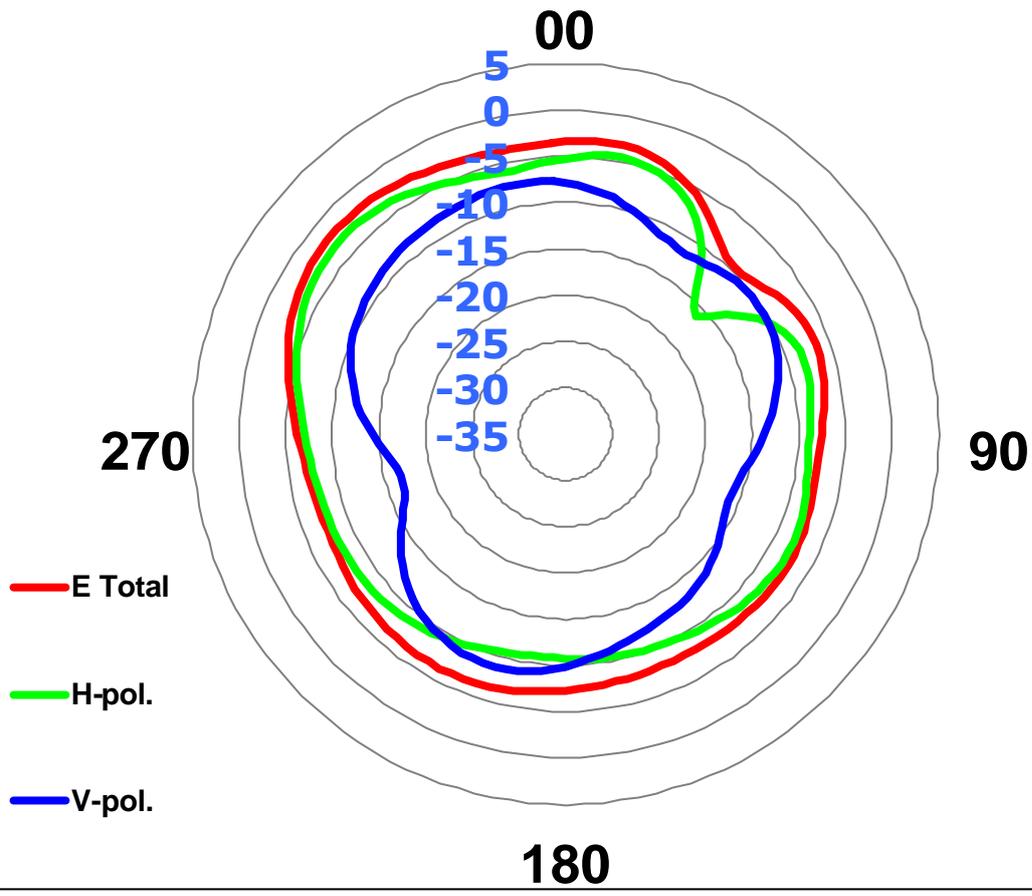

— E Total
 — H-pol.
 — V-pol.


	H-pol	V pol
Peak Gain	-3.04	-7.59

ANT5 @ 837 MHz

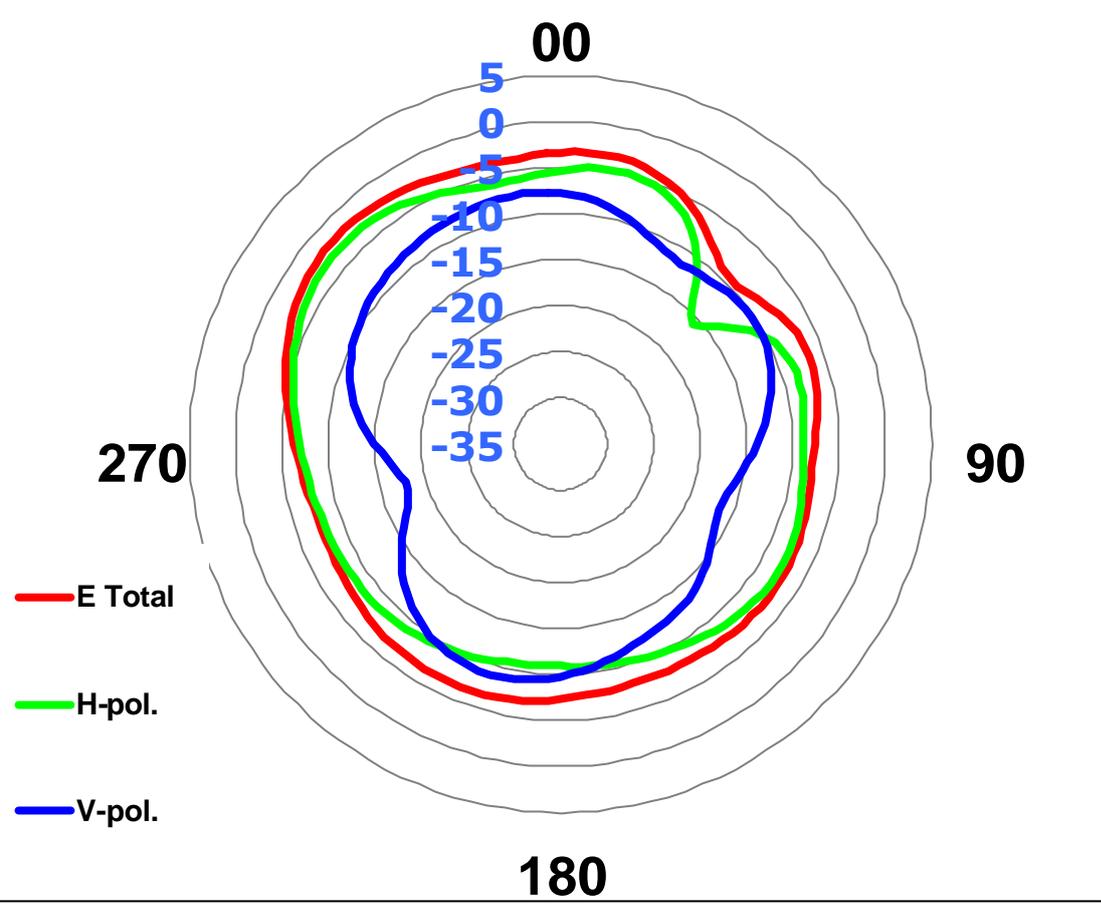

	H-pol	V pol
Peak Gain	-3.07	-7.55

ANT5 @ 845 MHz

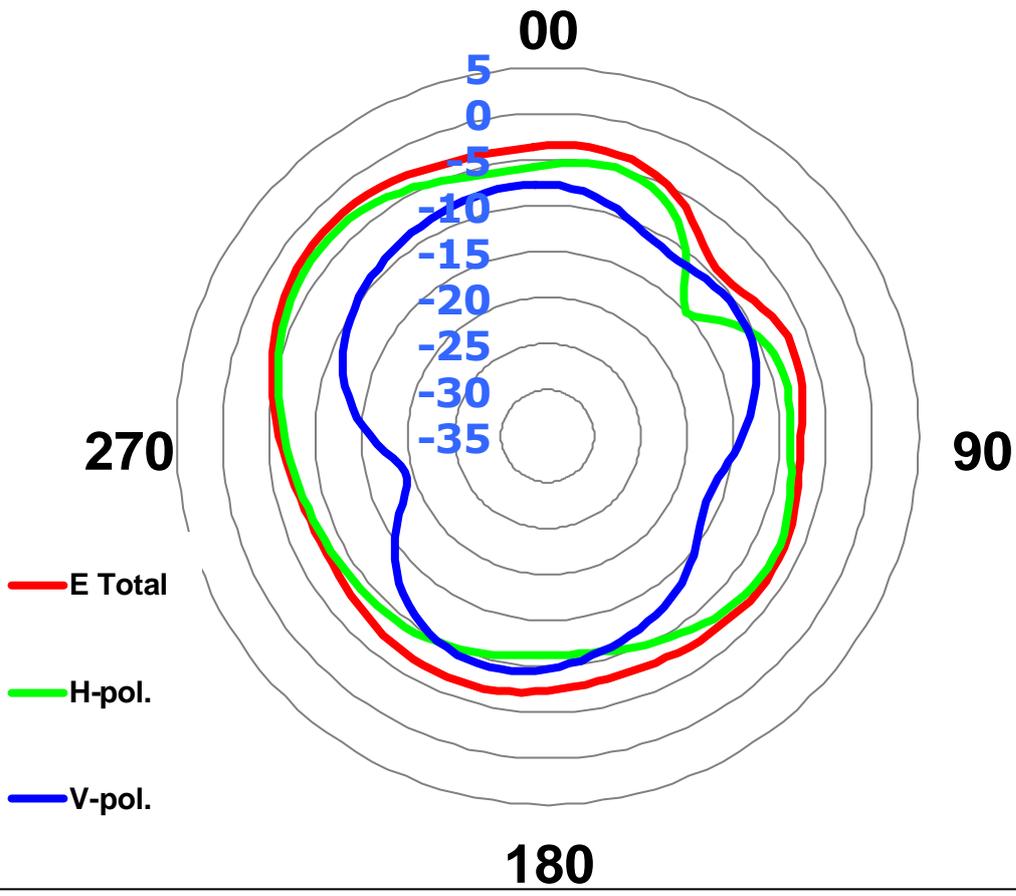


— E Total
 — H-pol.
 — V-pol.

	H-pol	V pol
Peak Gain	-3.15	-7.61

C


ANT5 @ 849 MHz

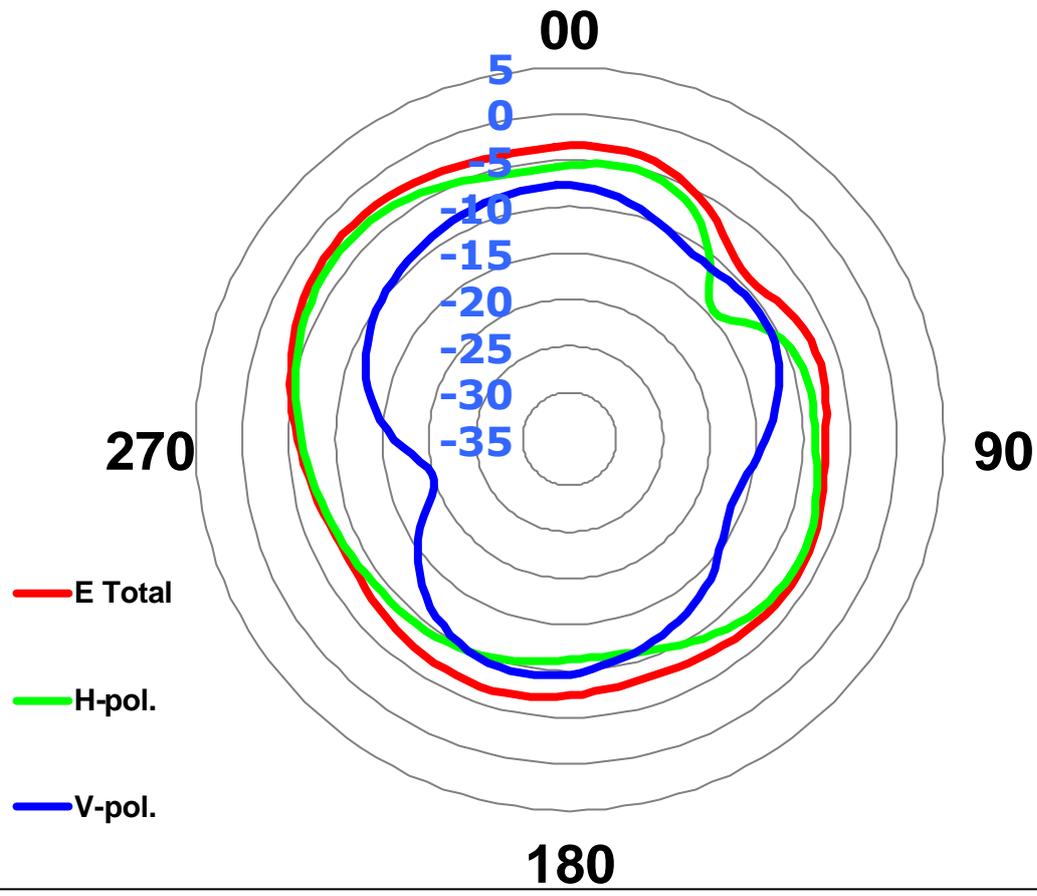

- E Total
- H-pol.
- V-pol.


	H-pol	V pol
Peak Gain	-3.17	-7.65

ANT5 @ 880 MHz

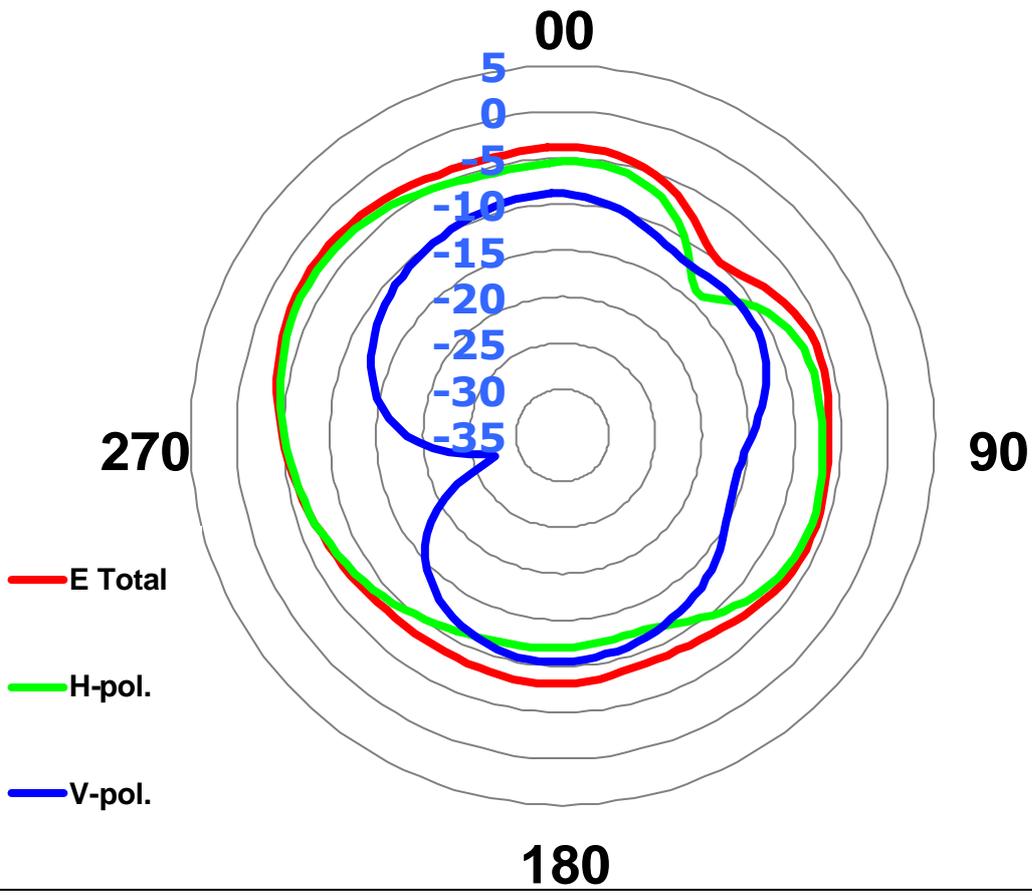


	H-pol	V pol
Peak Gain	-3.12	-8.87

ANT5 @ 894 MHz

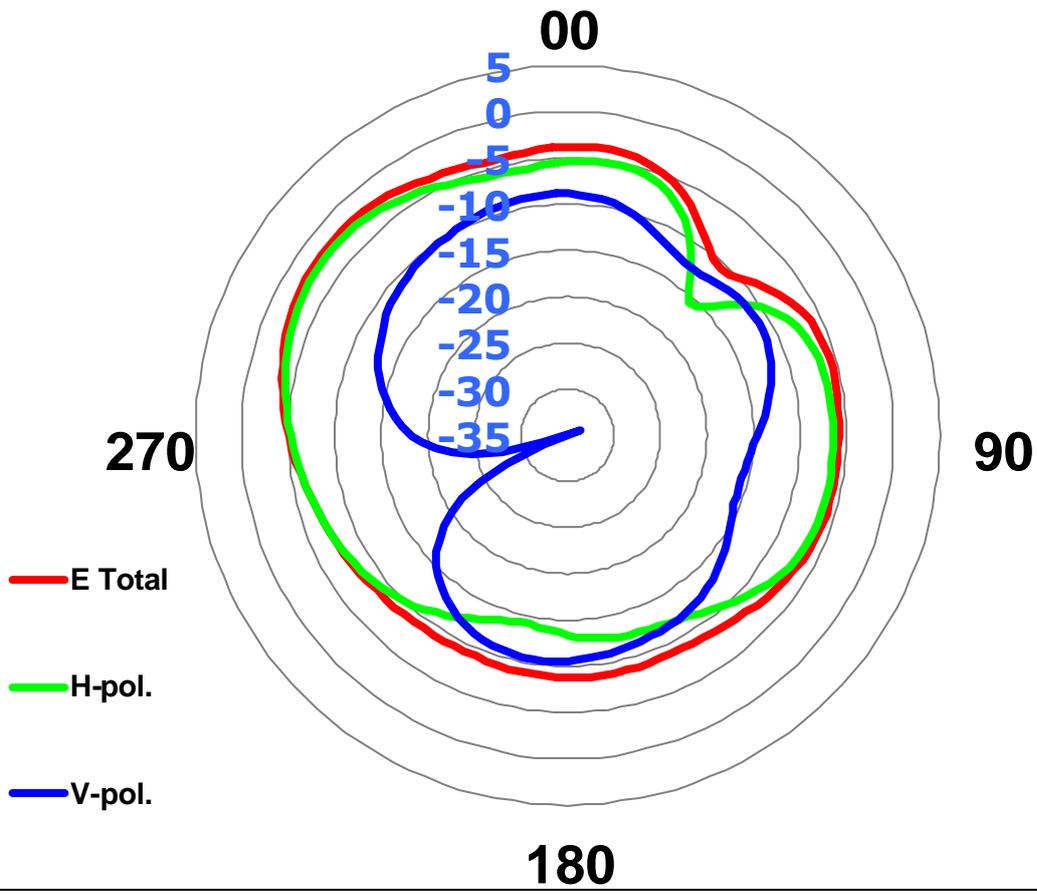

	H-pol	V pol
Peak Gain	-2.64	-8.78


ANT5 @ 915 MHz

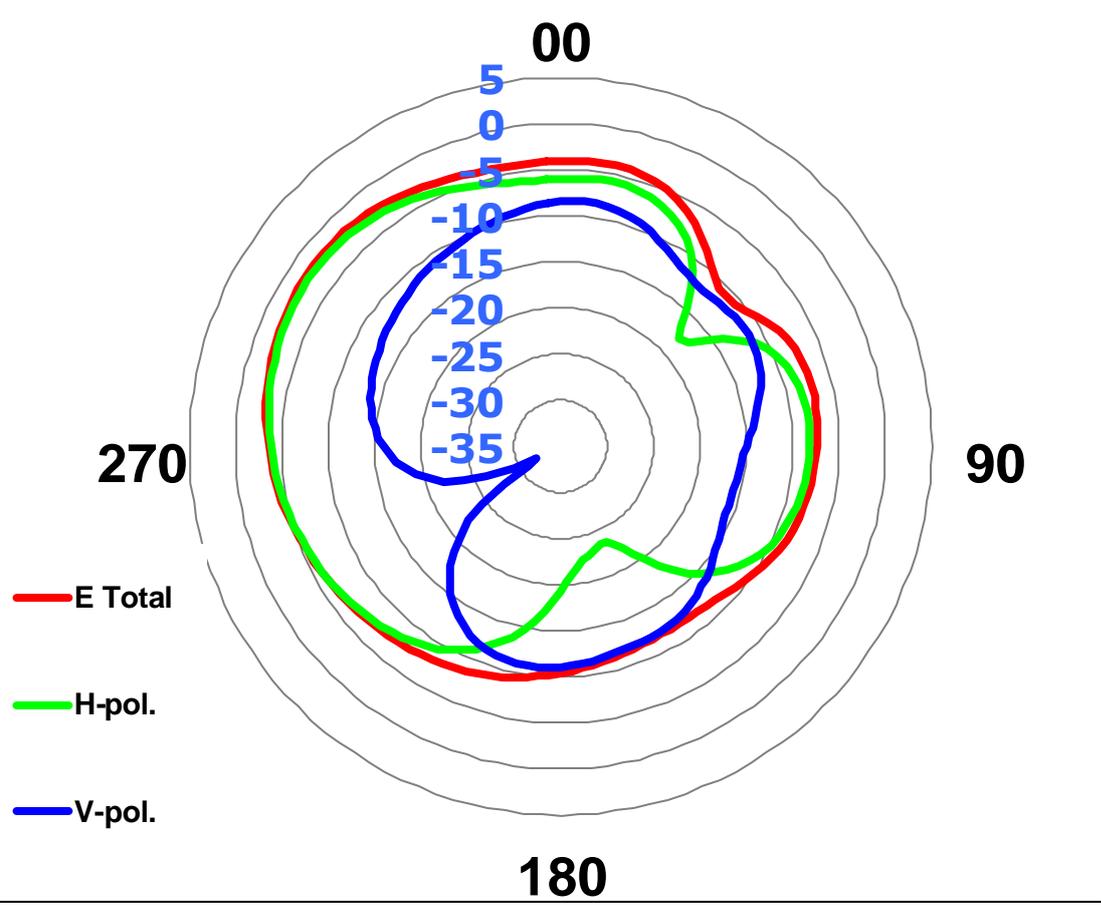

- E Total
- H-pol.
- V-pol.

	H-pol	V pol
Peak Gain	-2.36	-8.35


ANT5 @ 1710 MHz

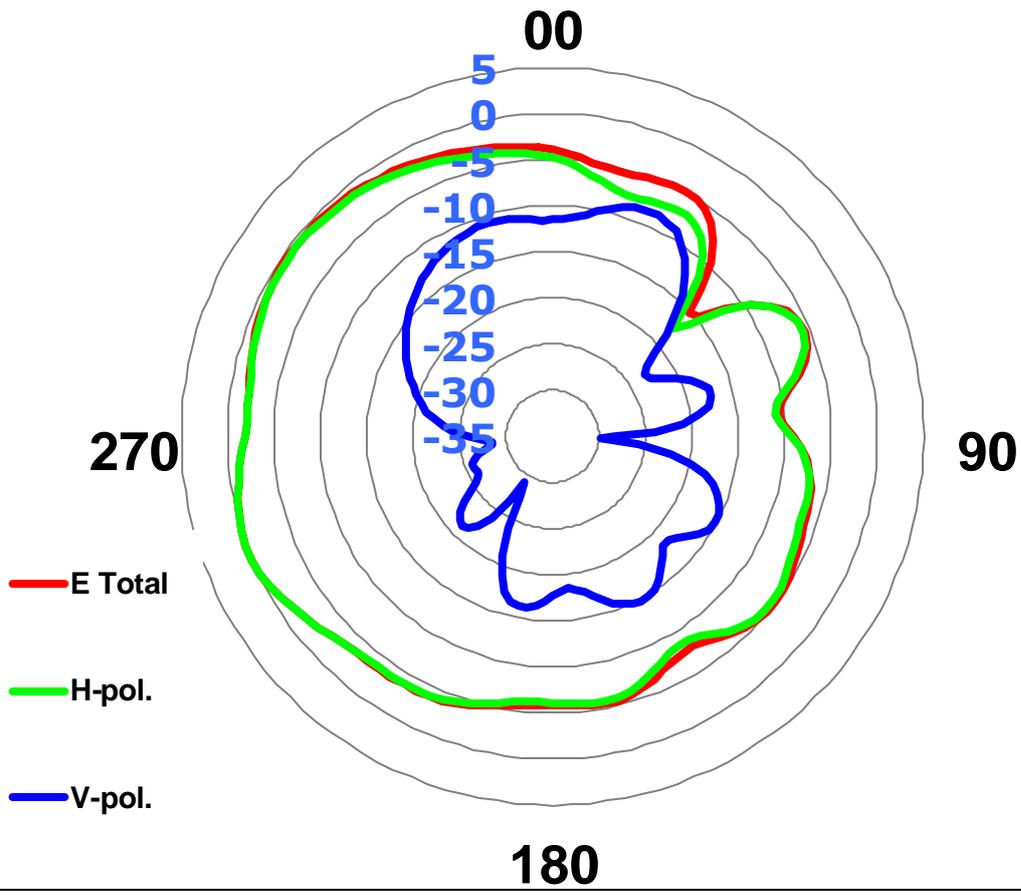

- E Total
- H-pol.
- V-pol.

	H-pol	V pol
Peak Gain	0.05	-8.43


ANT5 @ 1750 MHz

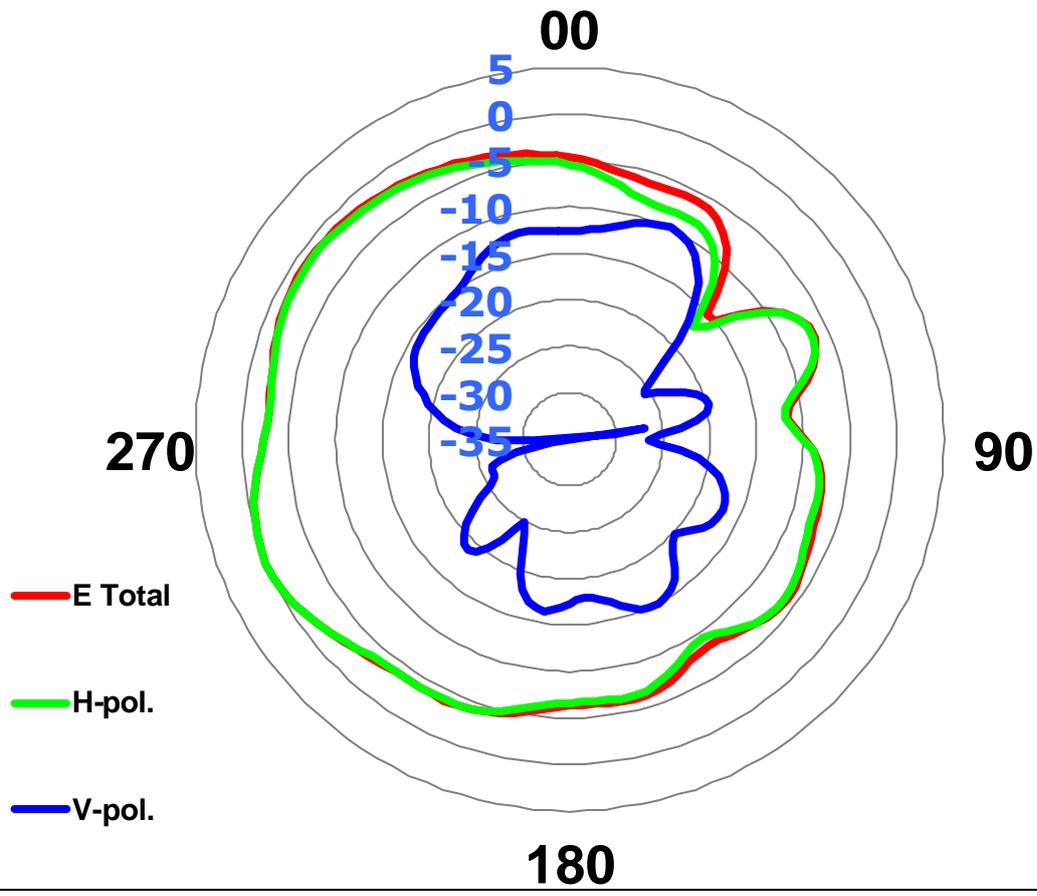

— E Total
— H-pol.
— V-pol.


	H-pol	V pol
Peak Gain	0.08	-9.84

ANT5 @ 1780 MHz

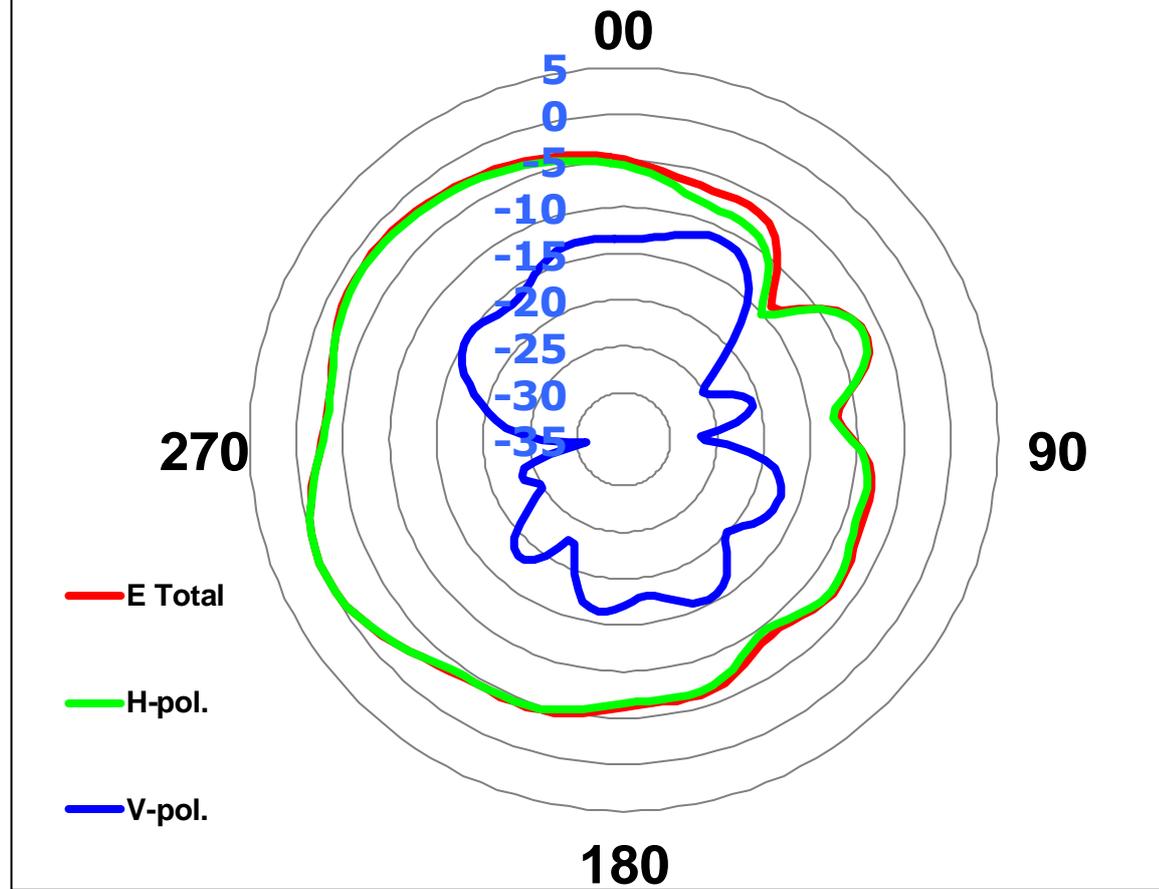


	H-pol	V pol
Peak Gain	0.11	-11.13

ANT5 @ 1785 MHz

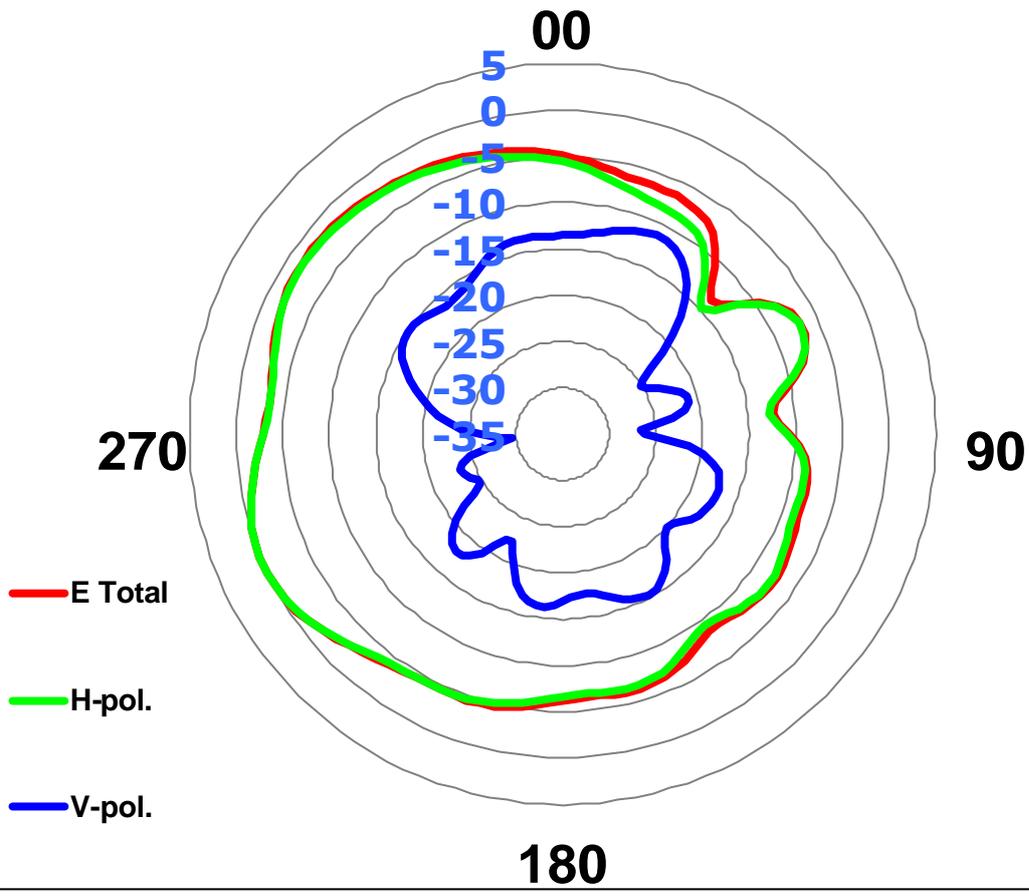


	H-pol	V pol
Peak Gain	0.04	-11.29

ANT5 @ 1880 MHz

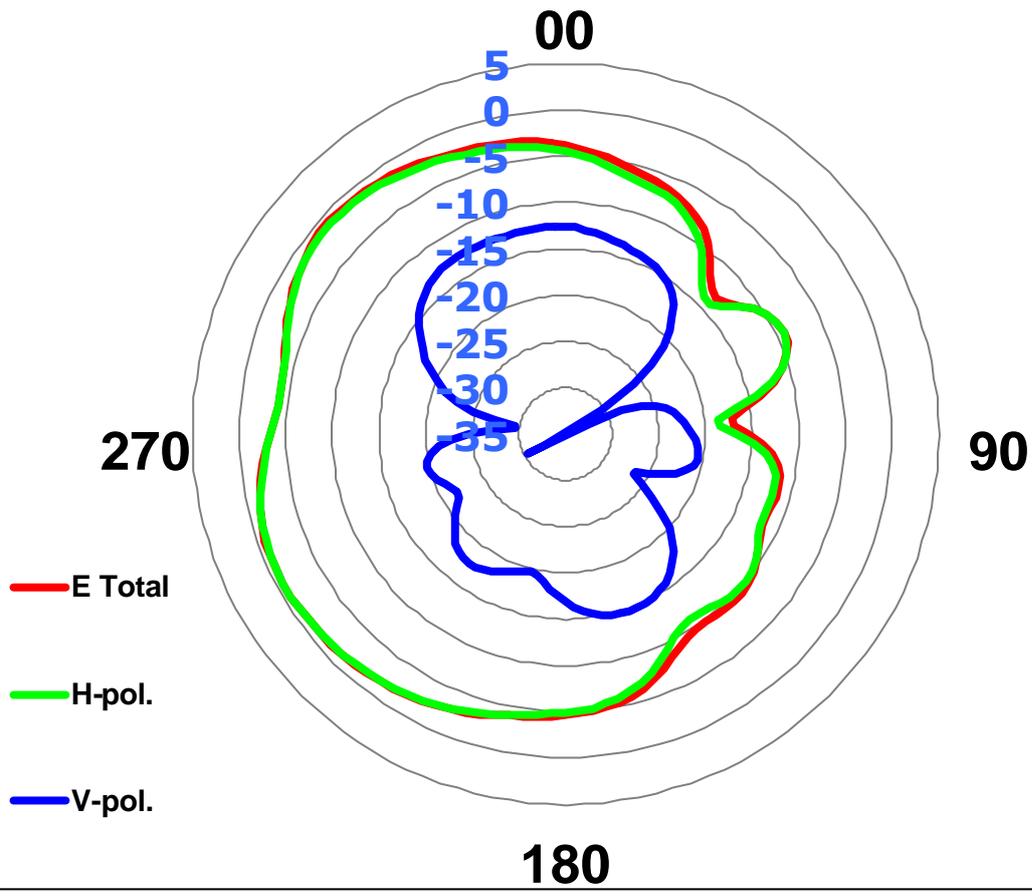


	H-pol	V pol
Peak Gain	-0.71	-12.51

ANT5 @ 1900 MHz

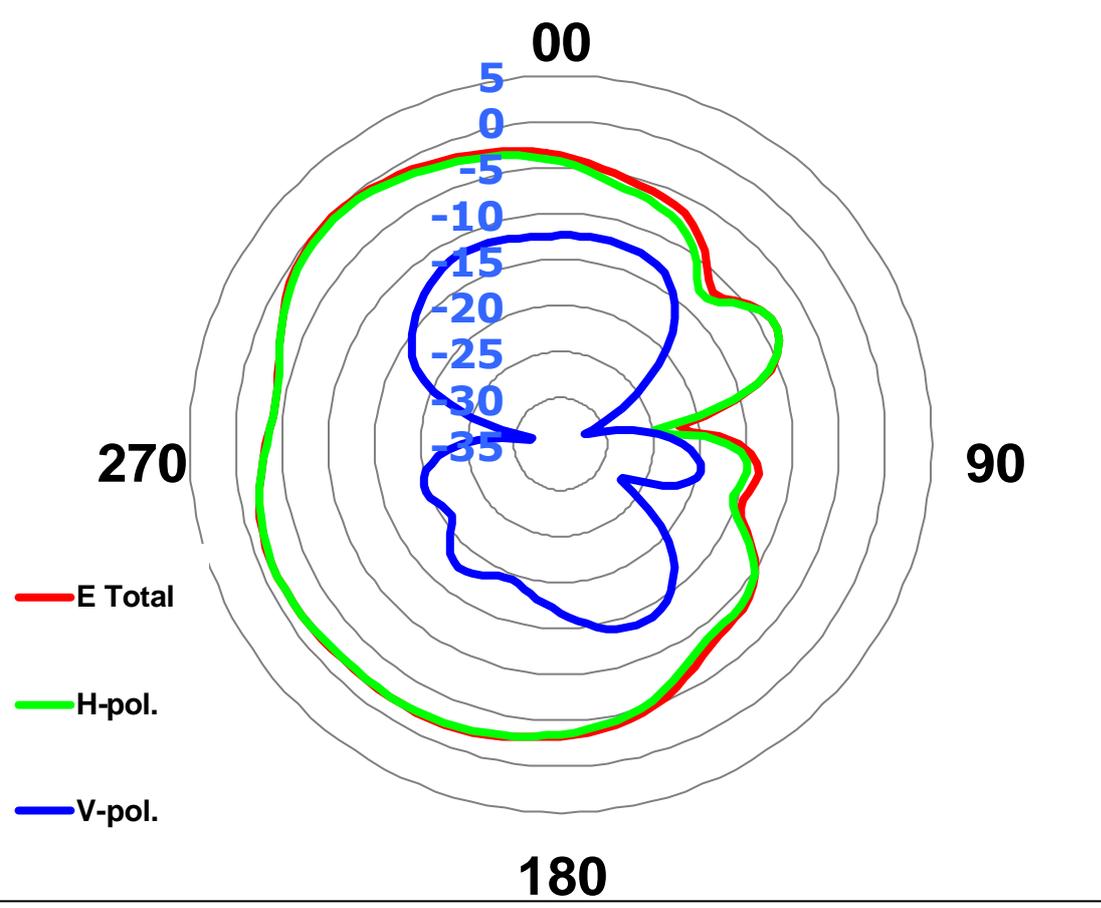


	H-pol	V pol
Peak Gain	-0.49	-11.73

ANT5 @ 1920 MHz

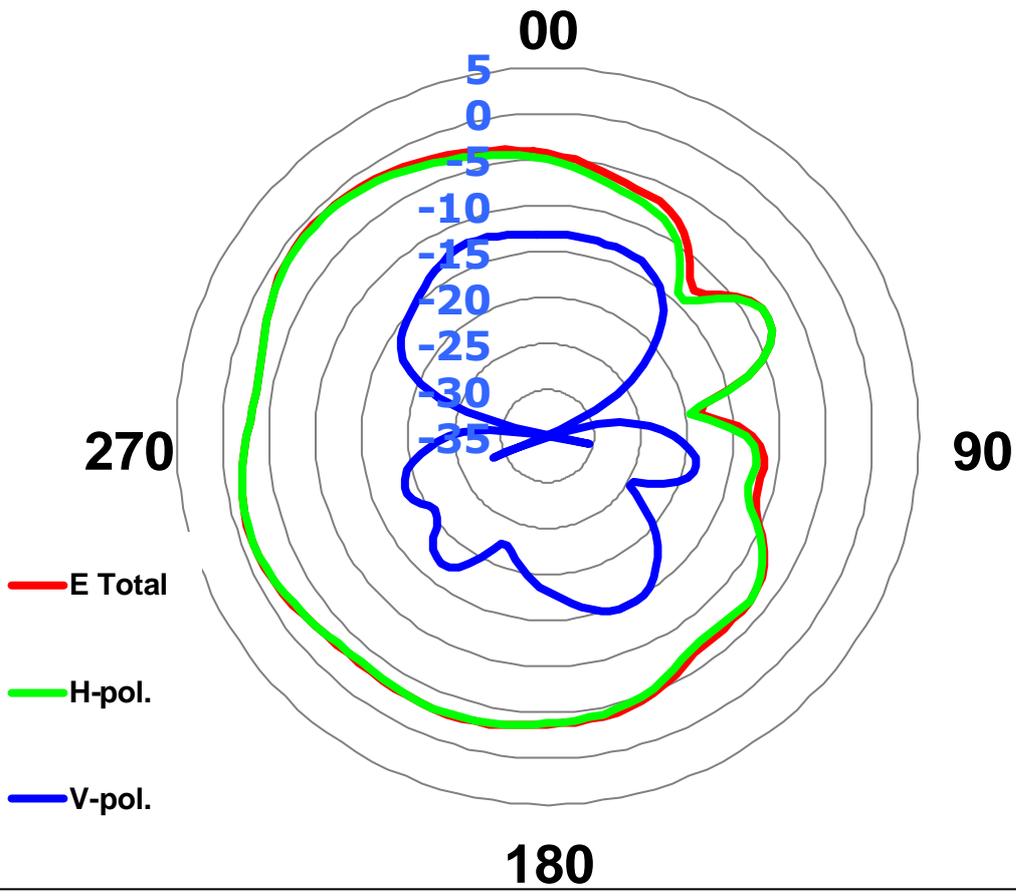


	H-pol	V pol
Peak Gain	-1.07	-12.38

ANT5 @ 1950 MHz

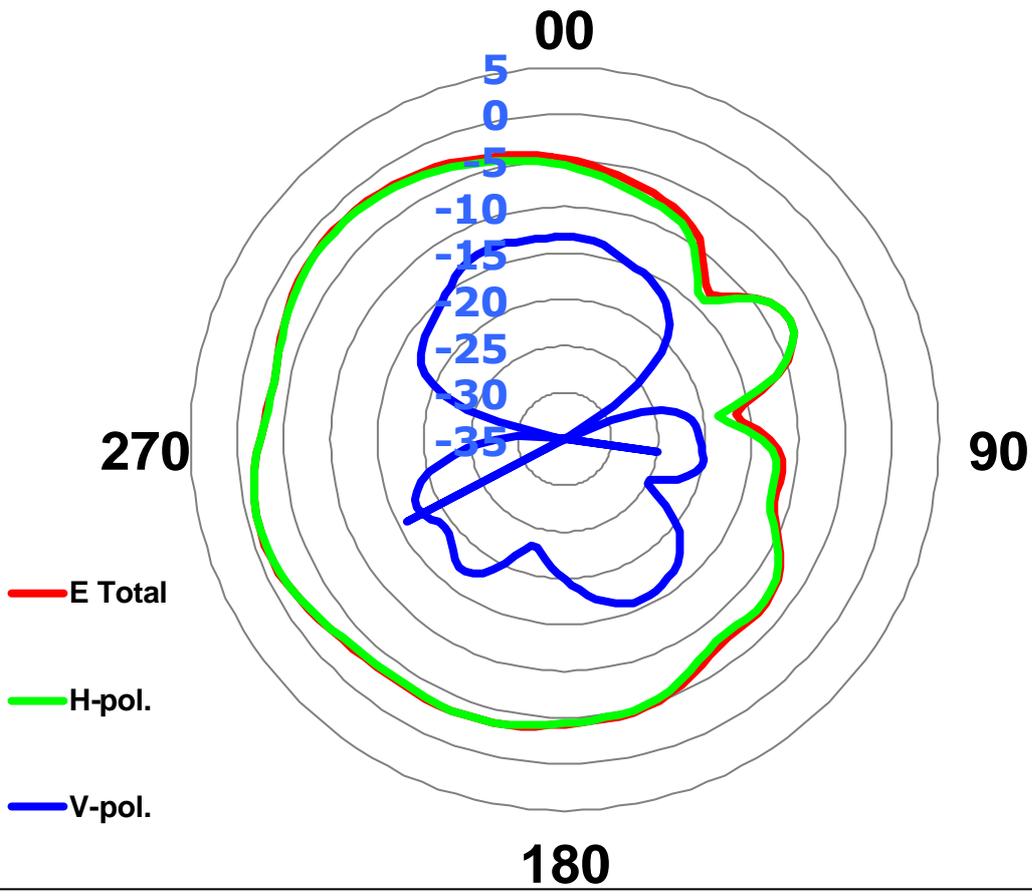


	H-pol	V pol
Peak Gain	-1.08	-12.96

ANT5 @ 1980 MHz

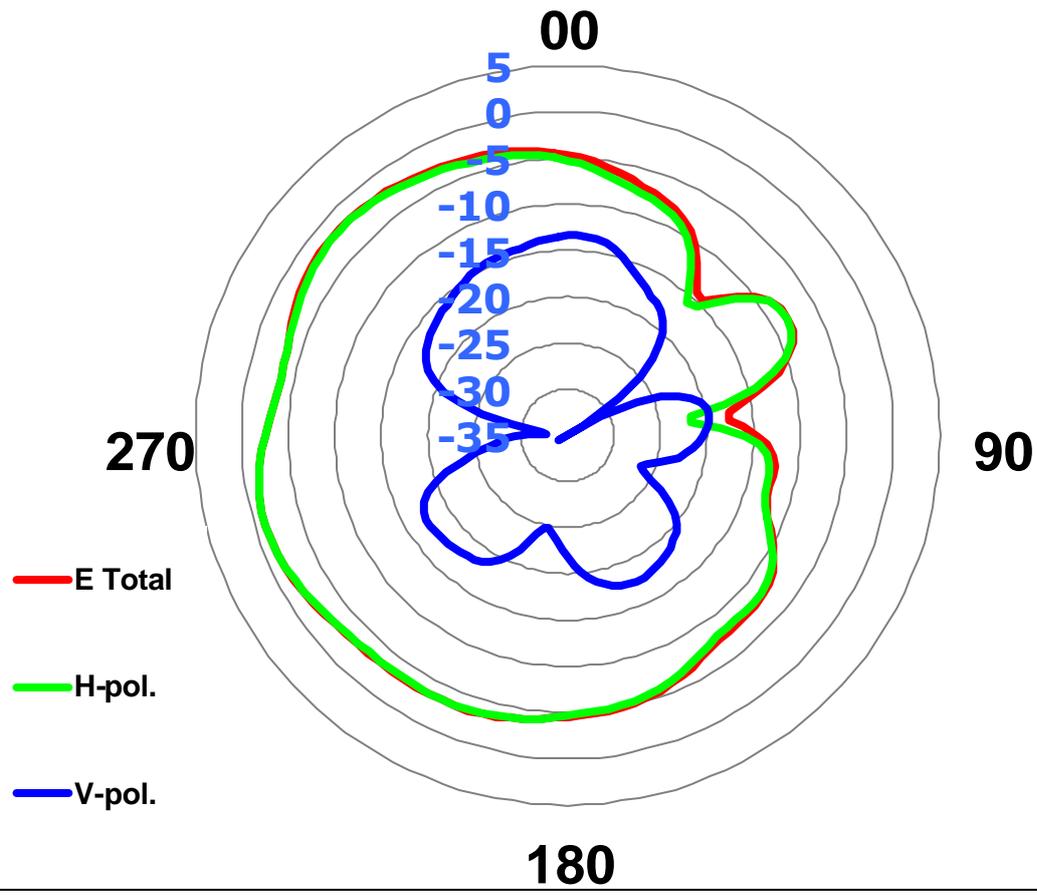


	H-pol	V pol
Peak Gain	-1.17	-13.27

ANT5 @ 2496 MHz

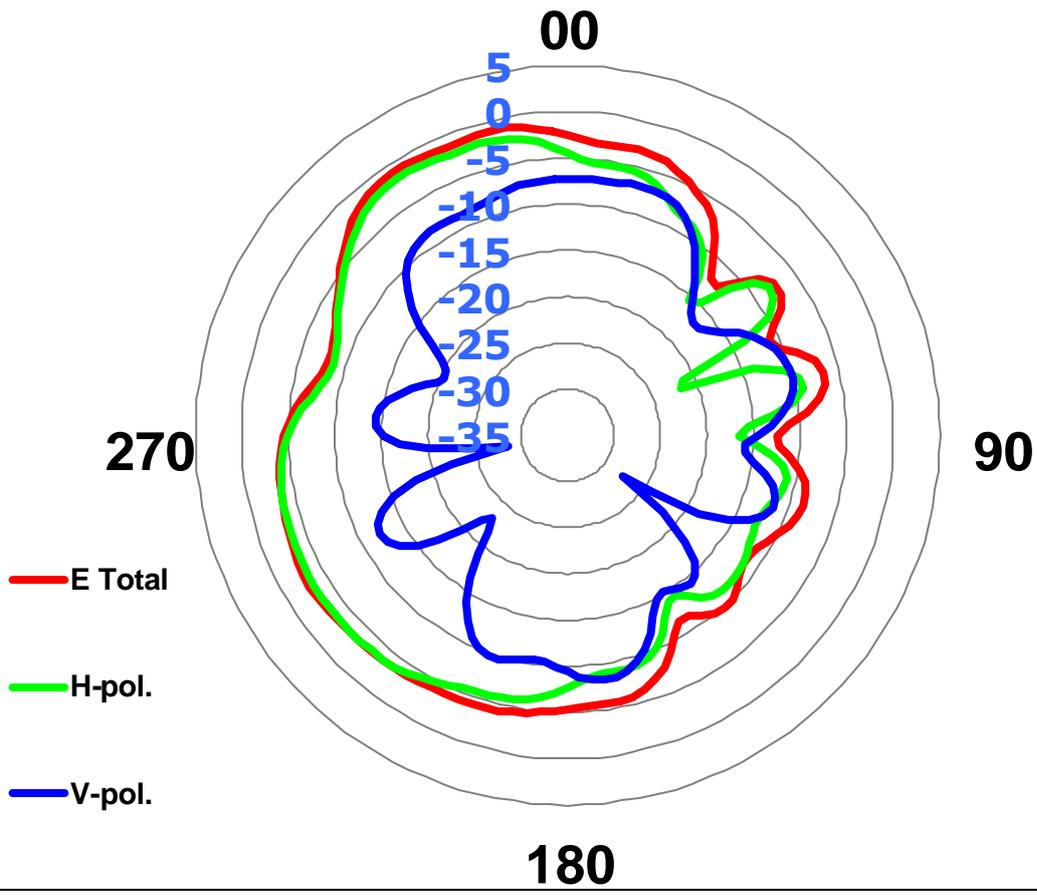


	H-pol	V pol
Peak Gain	-1.76	-6.85

ANT5 @ 2595 MHz

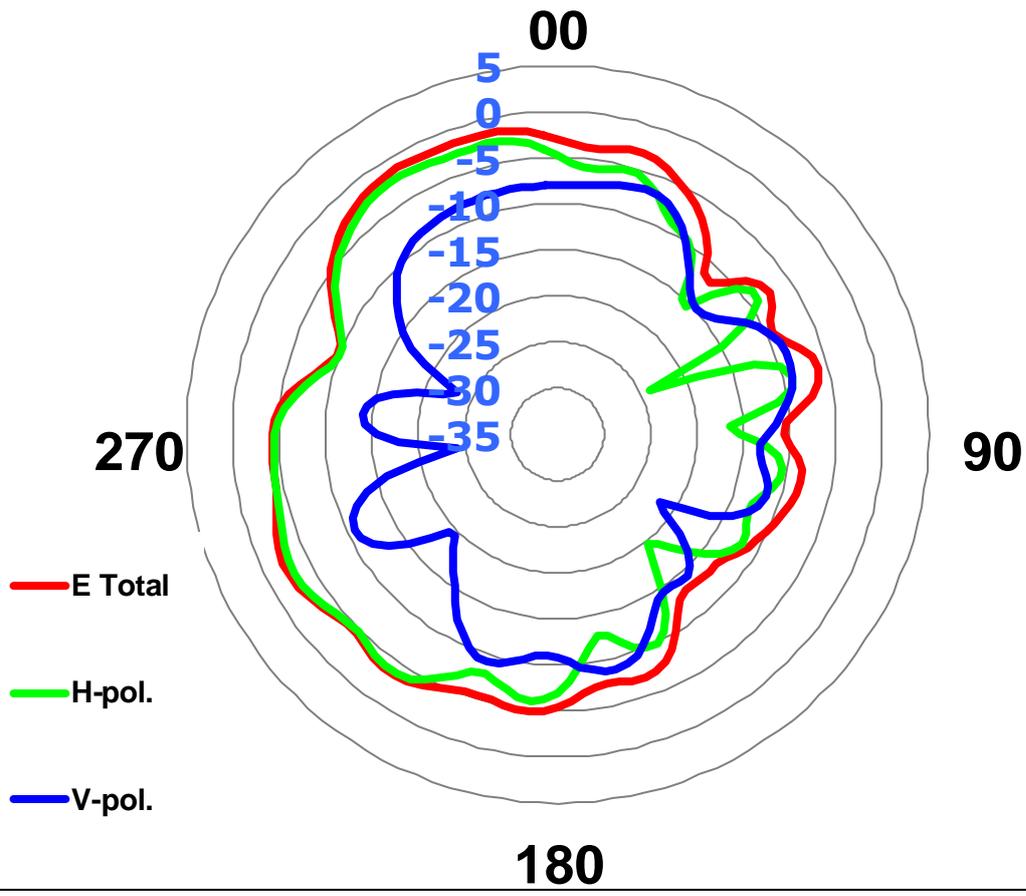


	H-pol	V pol
Peak Gain	-2.26	-6.81

ANT5 @ 2690 MHz

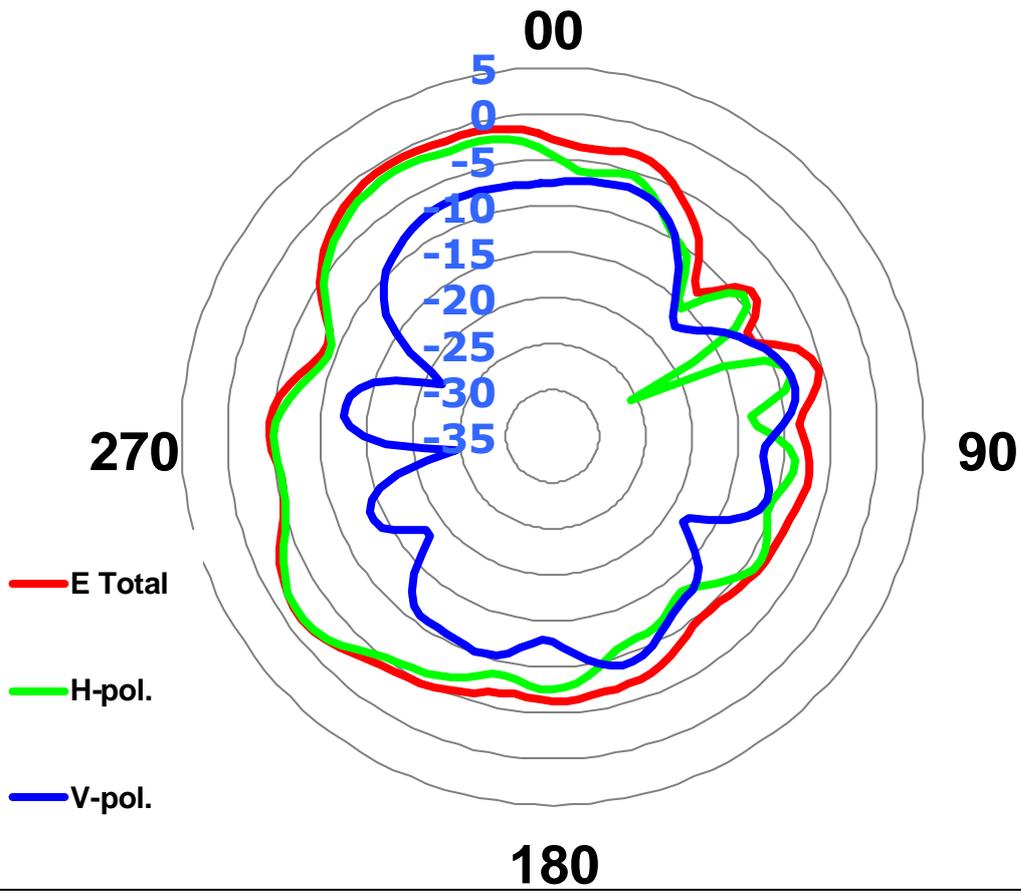

	H-pol	V pol
Peak Gain	-1.57	-6.83


ANT5 @ 3300 MHz

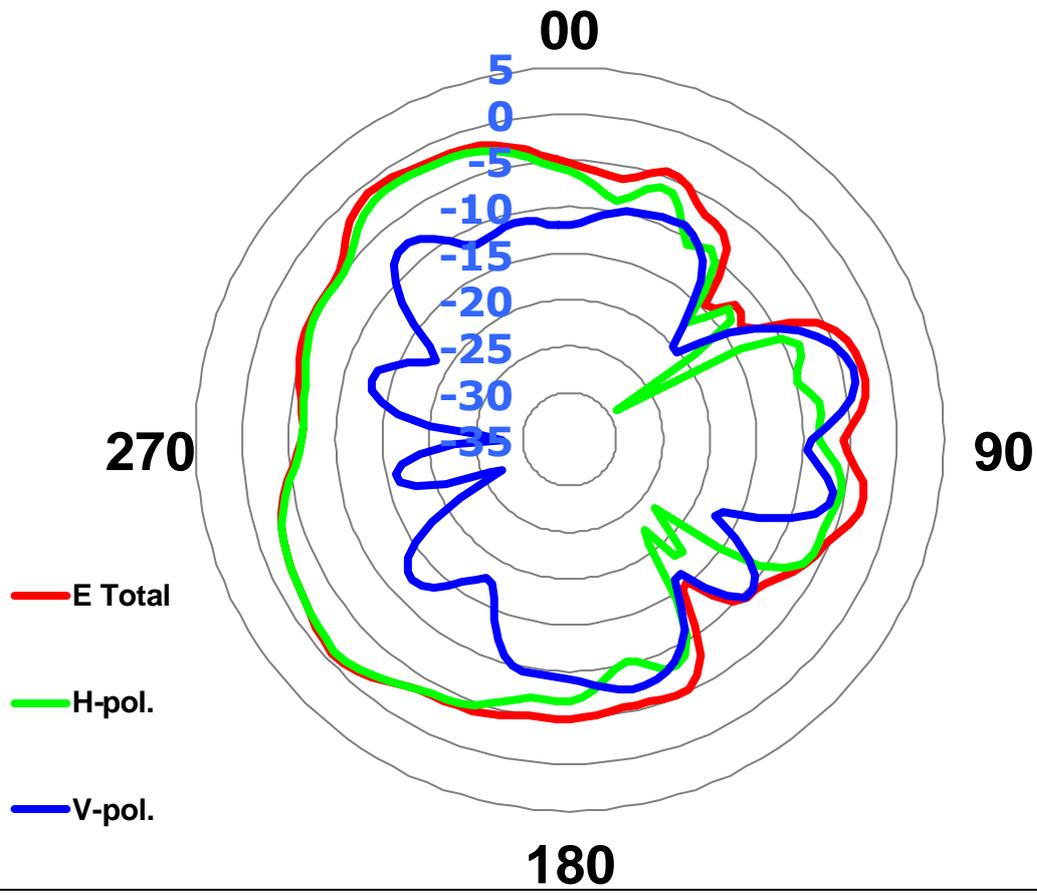

— E Total
 — H-pol.
 — V-pol.

	H-pol	V pol
Peak Gain	-1.12	-3.73


ANT5 @ 3400 MHz

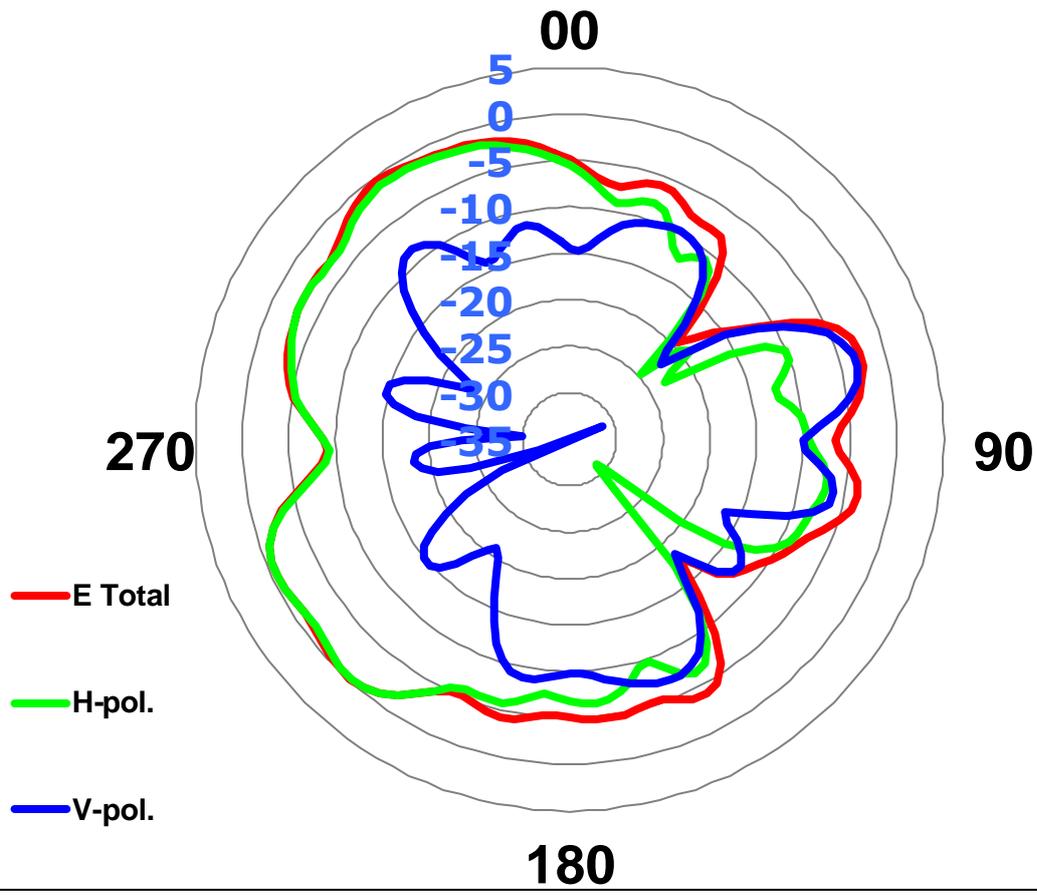

- E Total
- H-pol.
- V-pol.


	H-pol	V pol
Peak Gain	-0.20	-3.21

ANT5 @ 3500 MHz

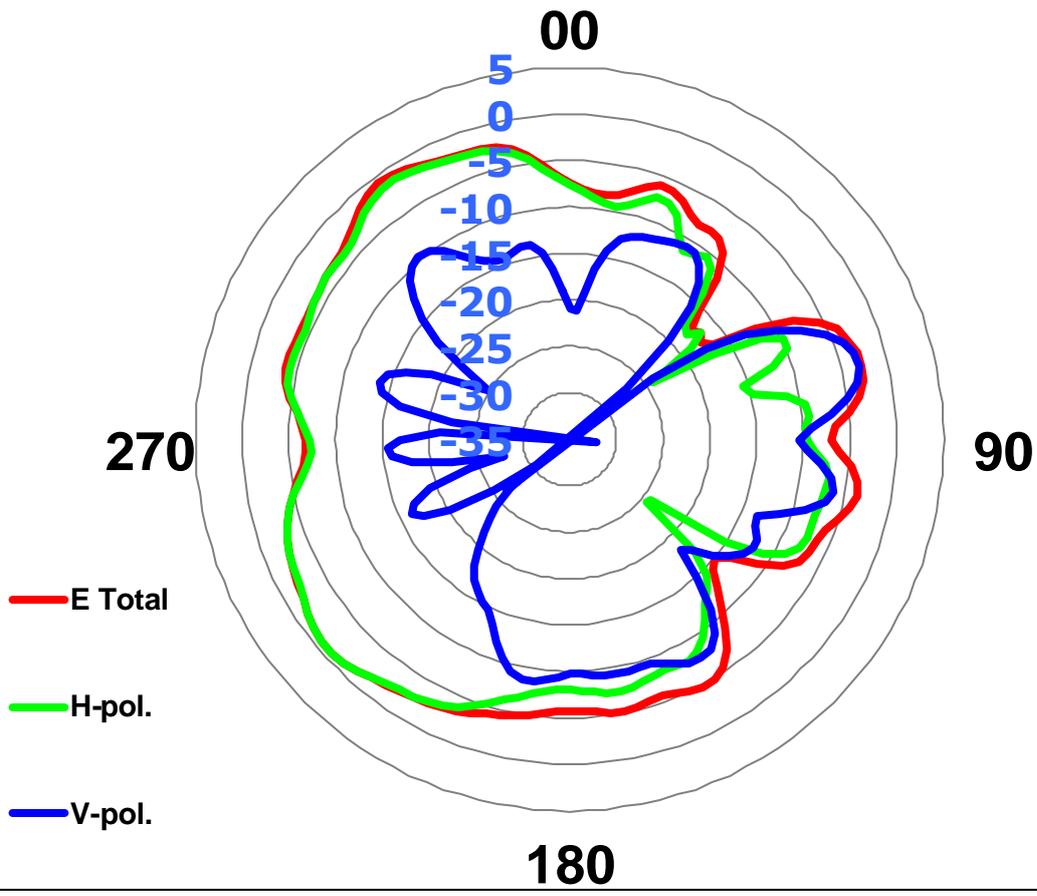

	H-pol	V pol
Peak Gain	-0.76	-3.04


ANT5 @ 3600 MHz

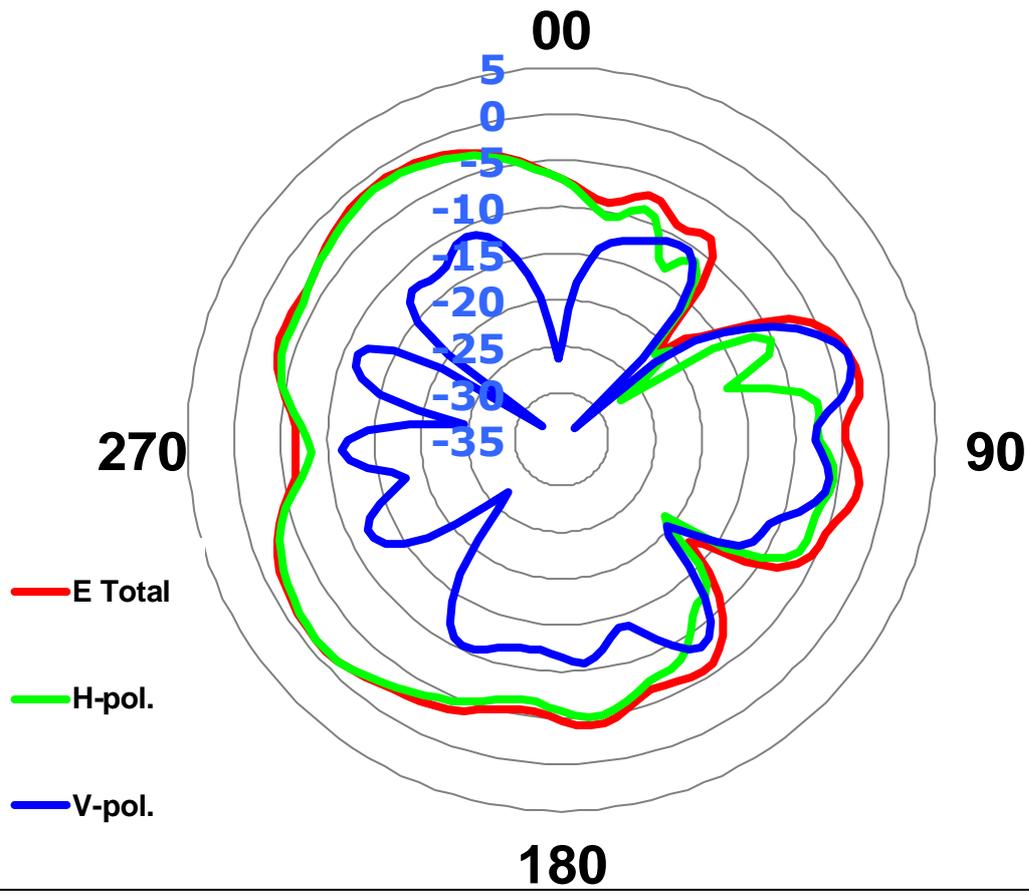

- E Total
- H-pol.
- V-pol.

	H-pol	V pol
Peak Gain	-1.10	-3.05


ANT5 @ 3750 MHz

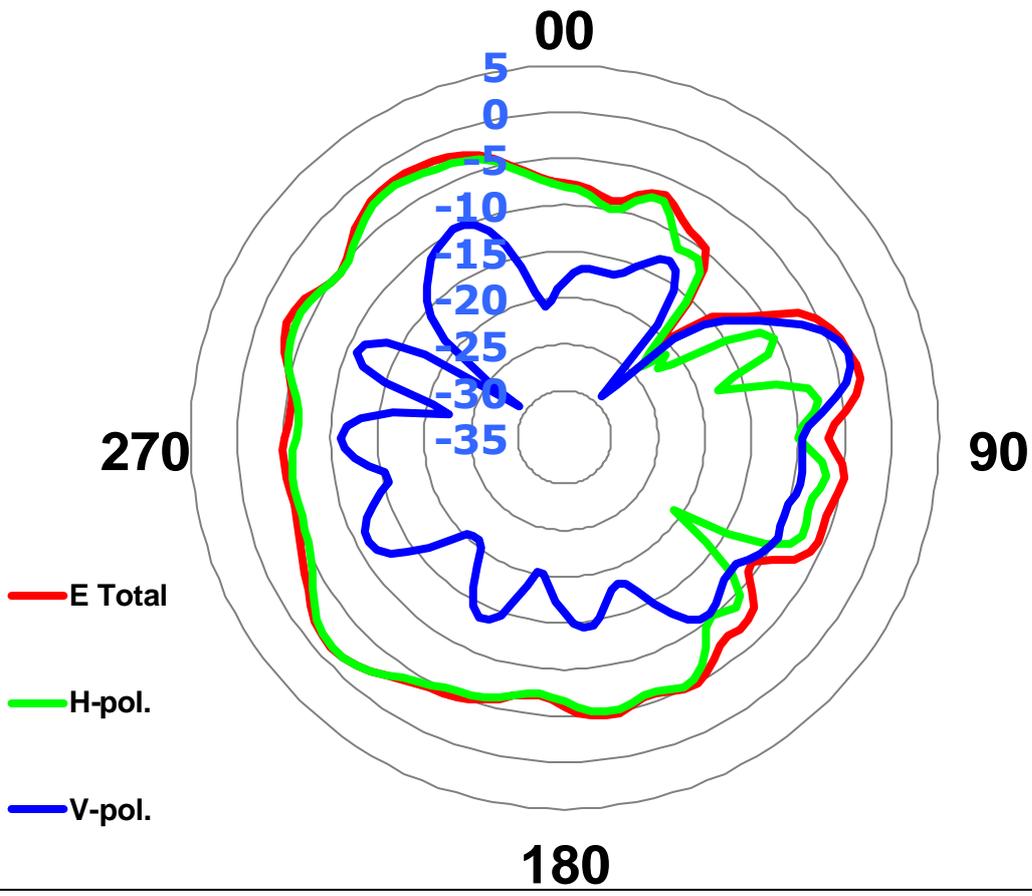

— E Total
 — H-pol.
 — V-pol.

	H-pol	V pol
Peak Gain	-1.44	-3.40

ANT5 @ 4200 MHz

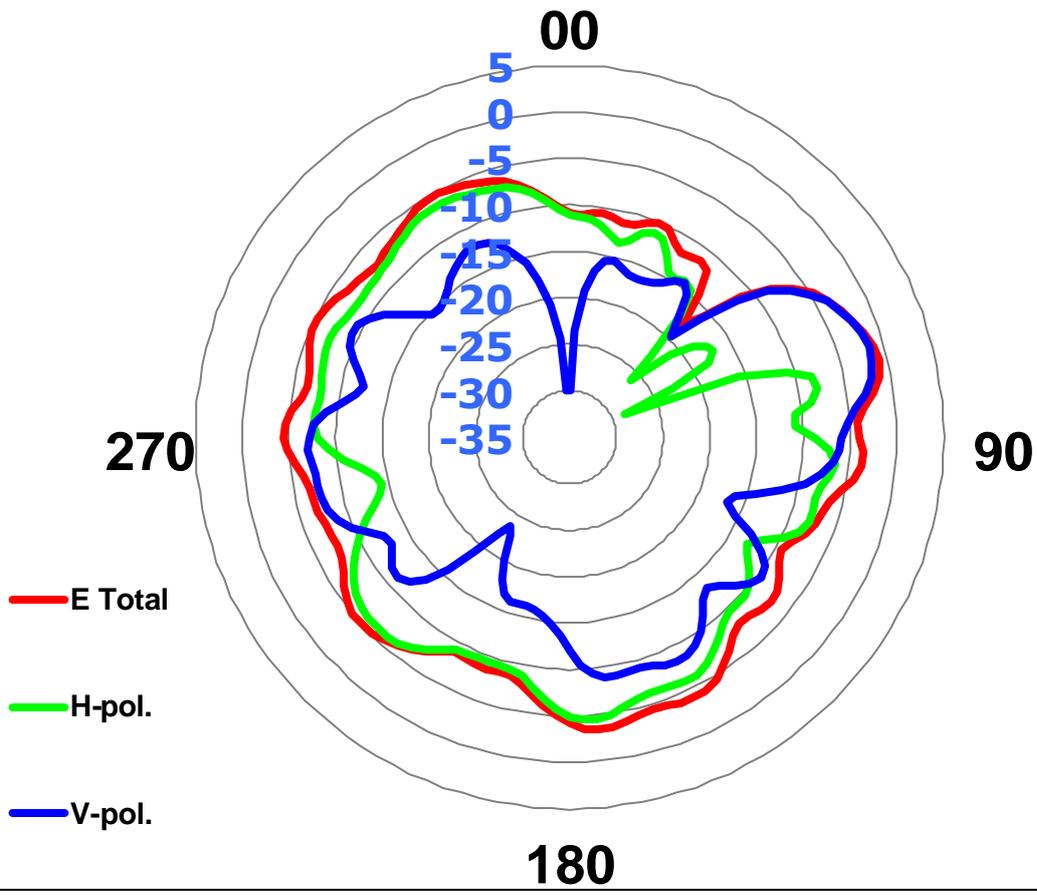


— E Total
 — H-pol.
 — V-pol.

	H-pol	V pol
Peak Gain	-4.55	-1.56

C


ANT5 @ 4400 MHz

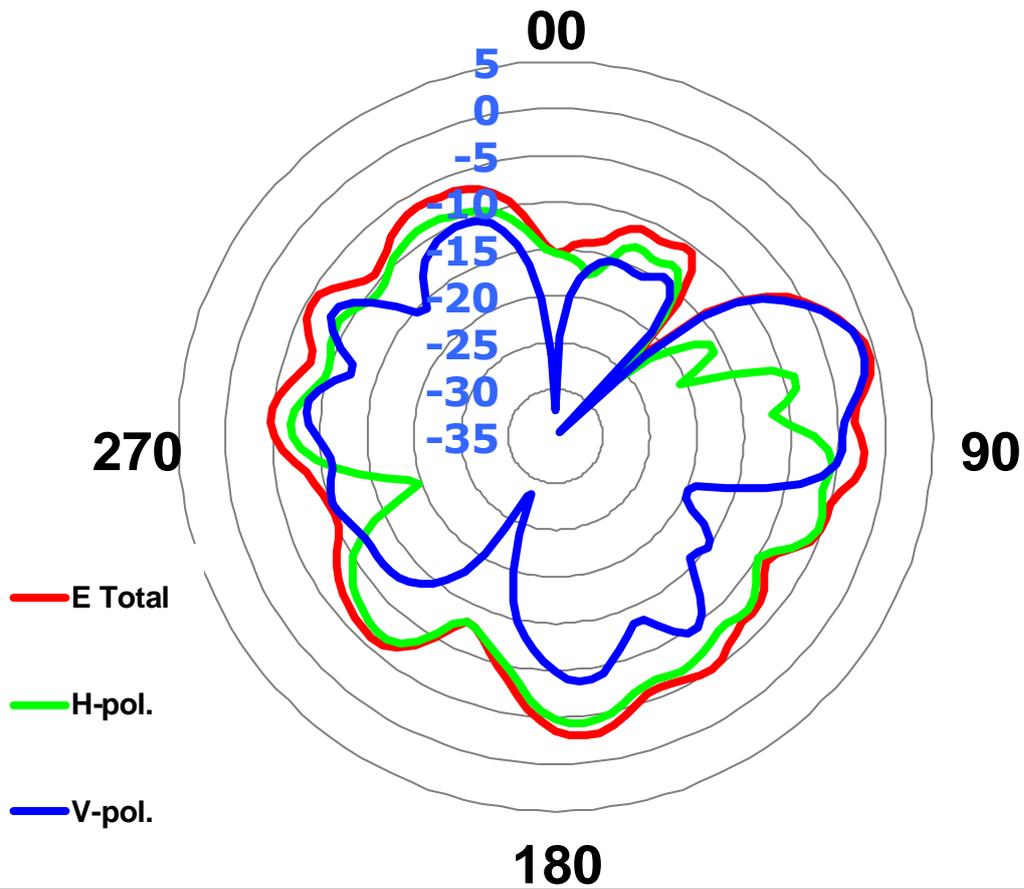

- E Total
- H-pol.
- V-pol.

	H-pol	V pol
Peak Gain	-4.16	-1.13


ANT5 @ 4800 MHz

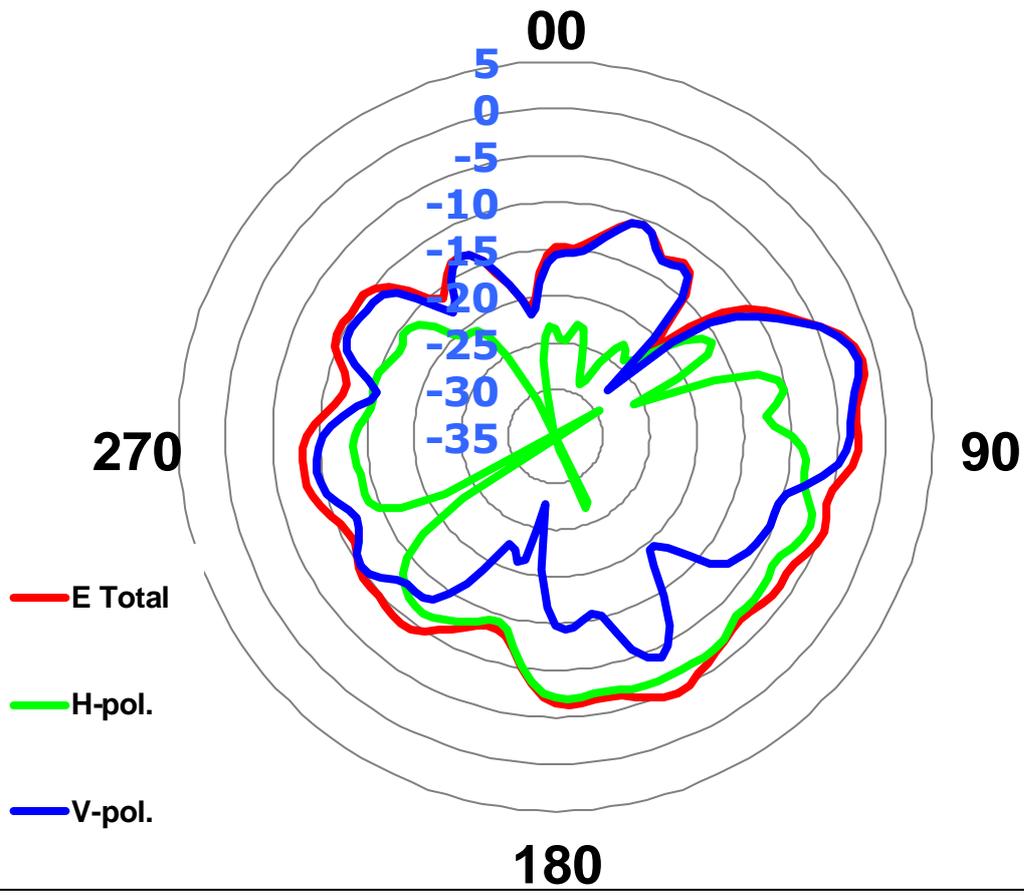

— E Total
 — H-pol.
 — V-pol.

	H-pol	V pol
Peak Gain	-6.27	-1.93


ANT5 @ 5000 MHz

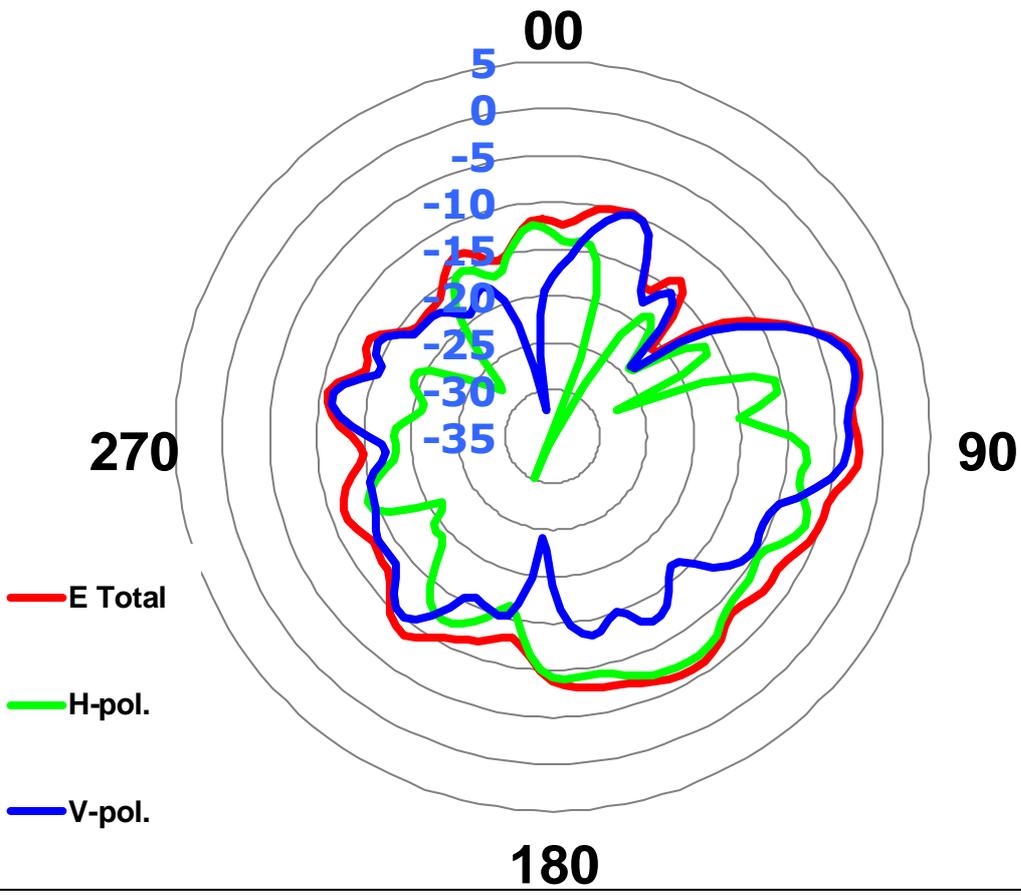


- E Total
- H-pol.
- V-pol.

	H-pol	V pol
Peak Gain	-6.58	-2.20

• [Ant8:](#)
Example

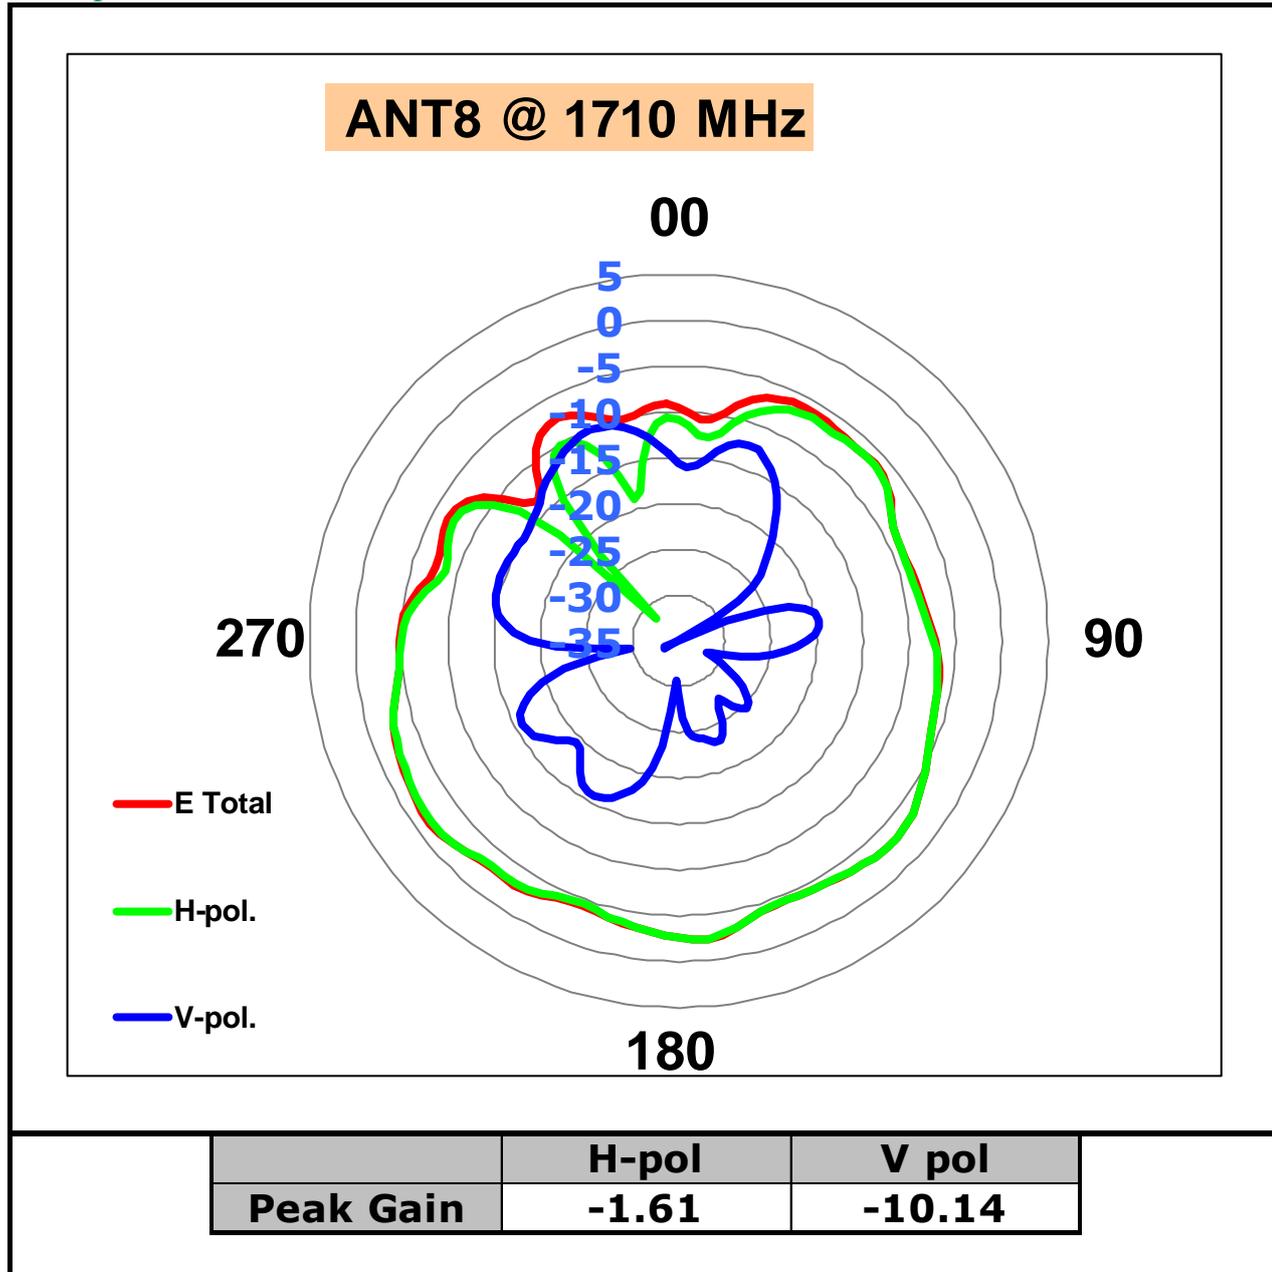


ANT8 @ 1750 MHz

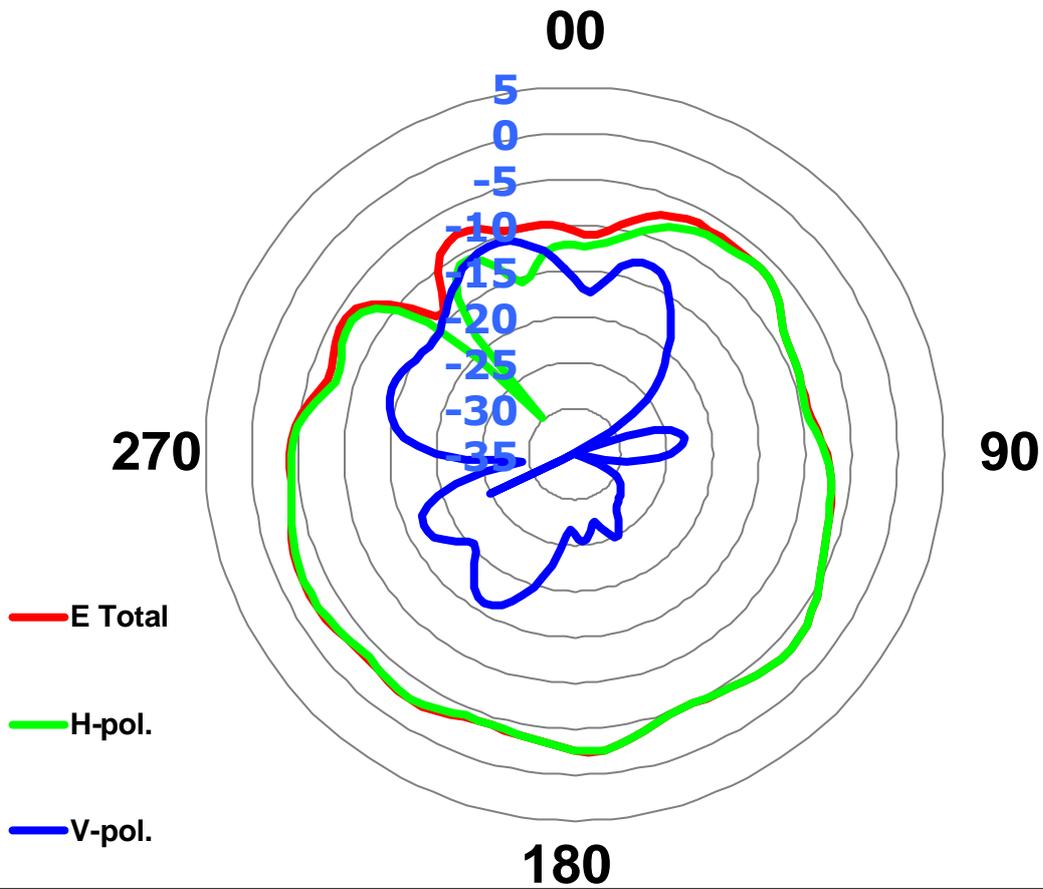


	H-pol	V pol
Peak Gain	-2.48	-10.44

ANT8 @ 1780 MHz

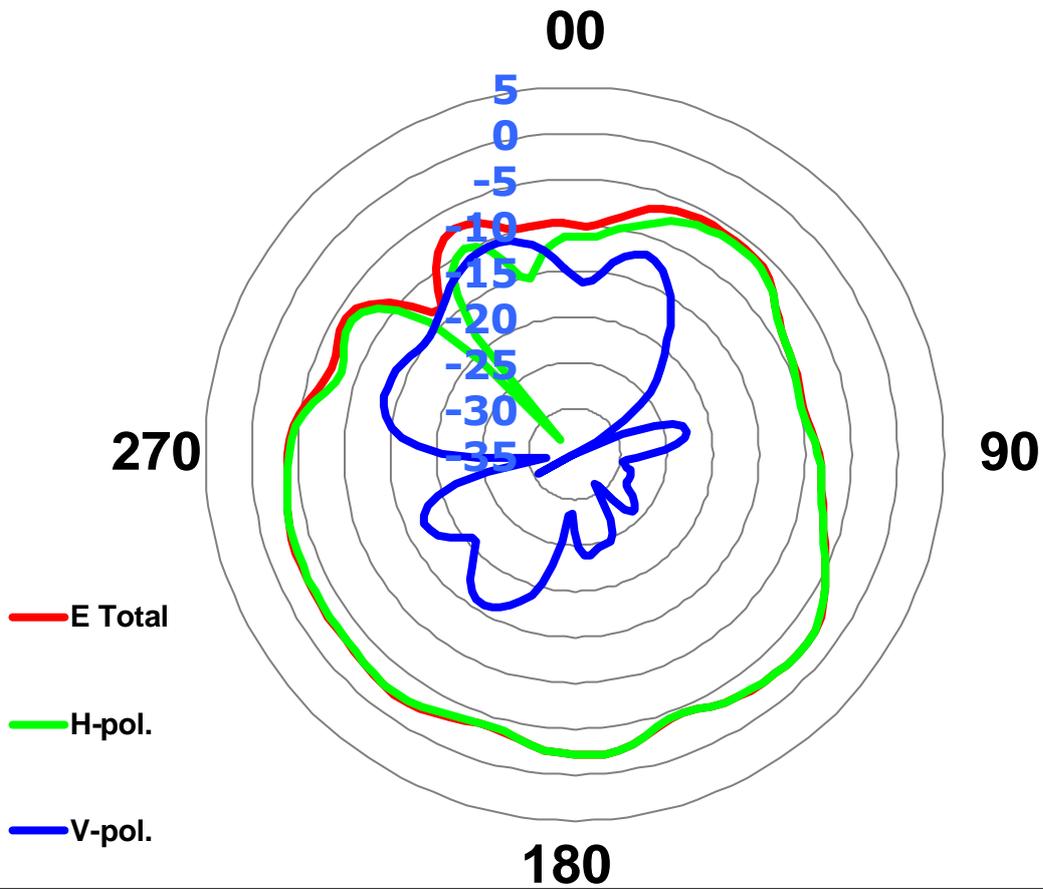


	H-pol	V pol
Peak Gain	-2.06	-10.47

ANT8 @ 1785 MHz

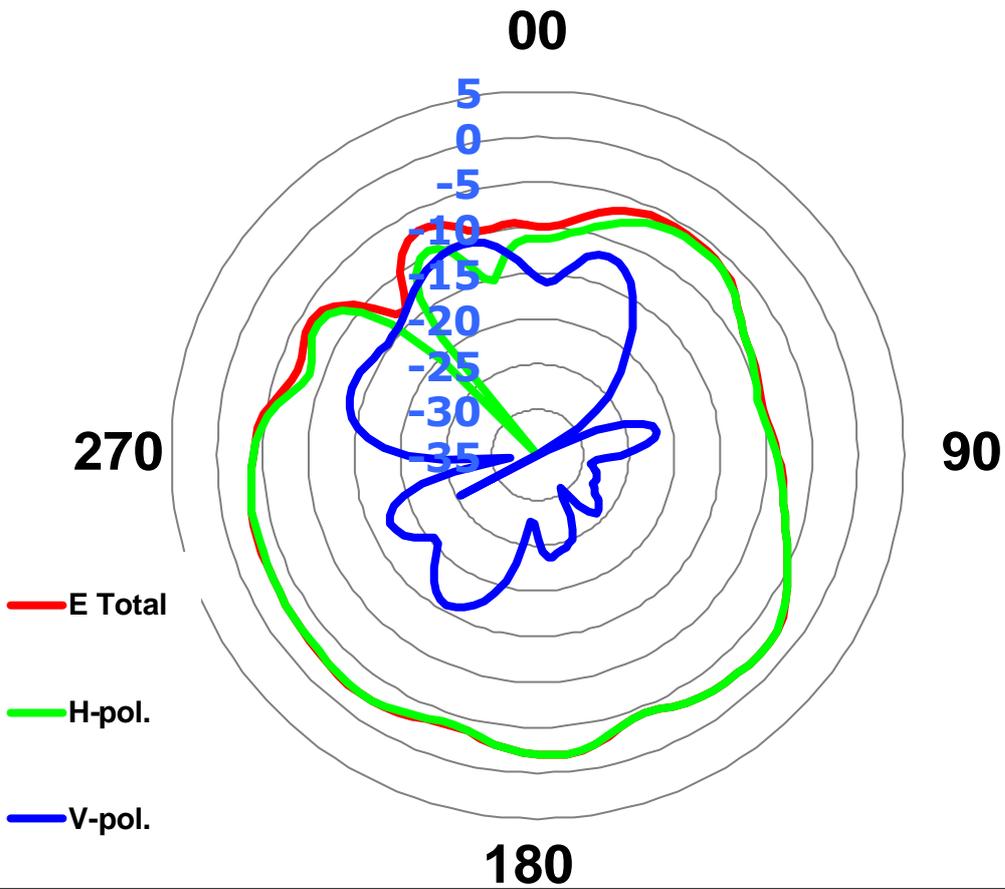


	H-pol	V pol
Peak Gain	-1.92	-10.39

ANT8 @ 1880 MHz

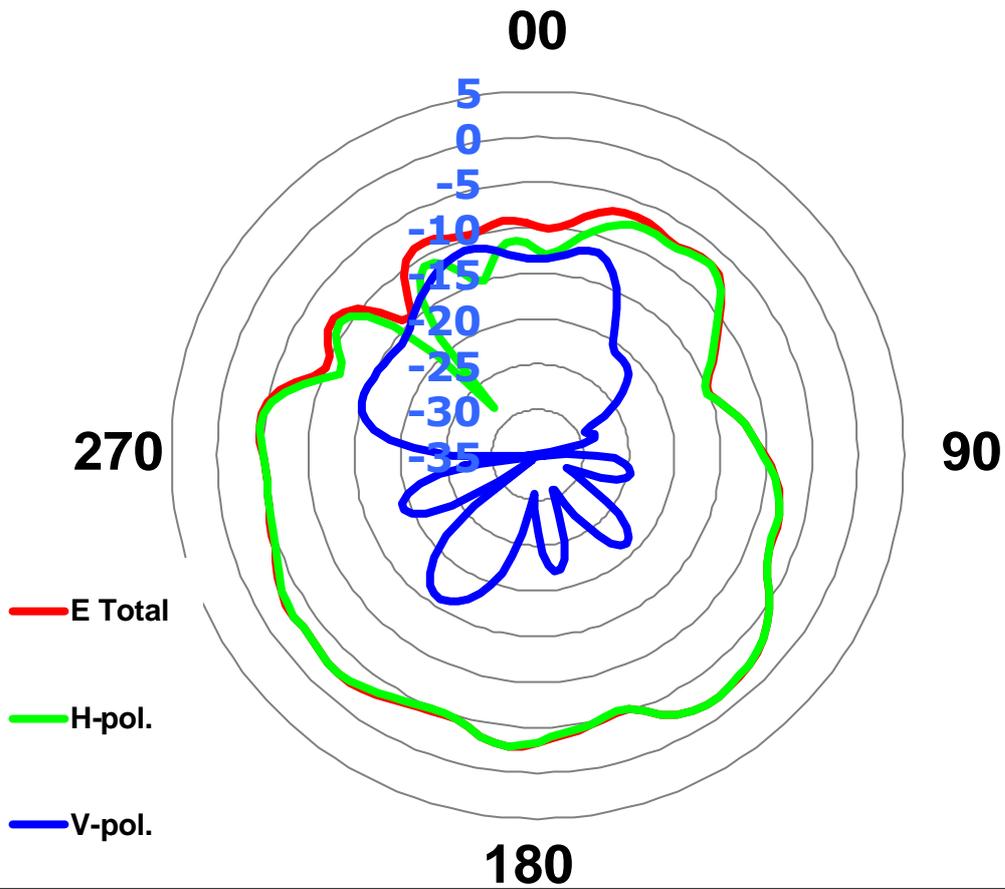


	H-pol	V pol
Peak Gain	-1.86	-11.16

ANT8 @ 1900 MHz

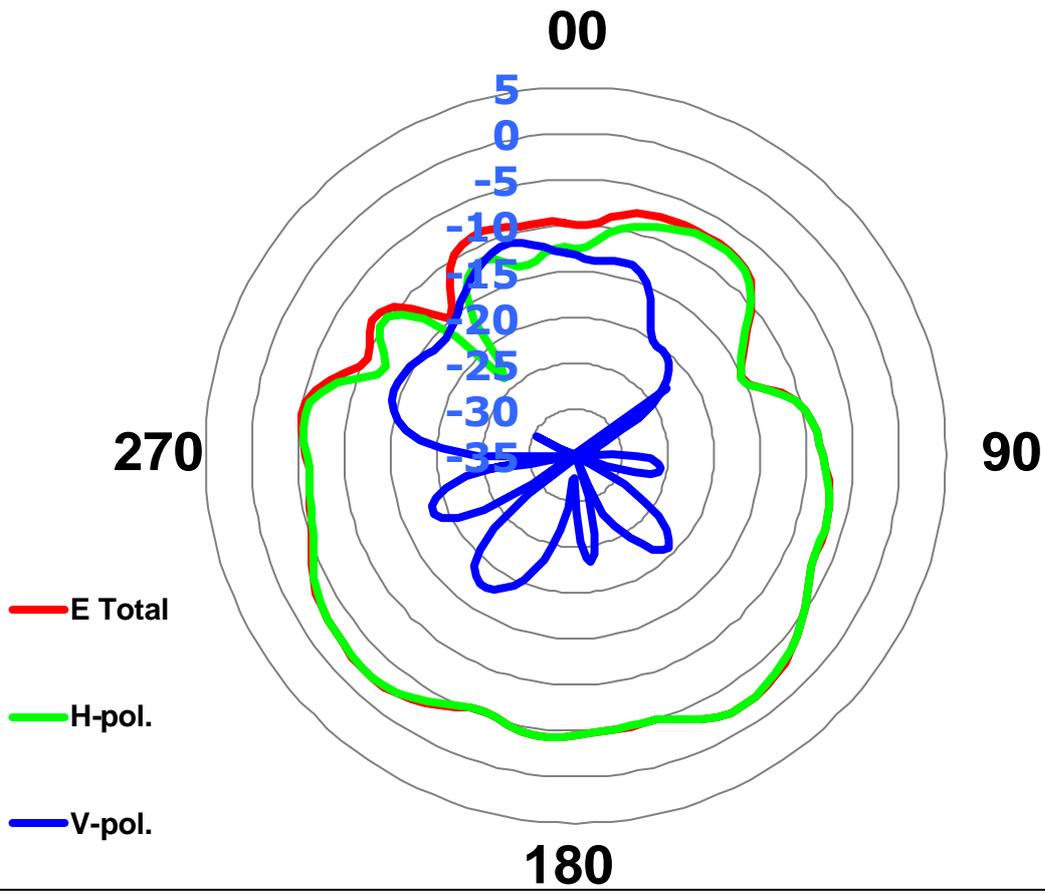

	H-pol	V pol
Peak Gain	-2.26	-10.98


ANT8 @ 1920 MHz

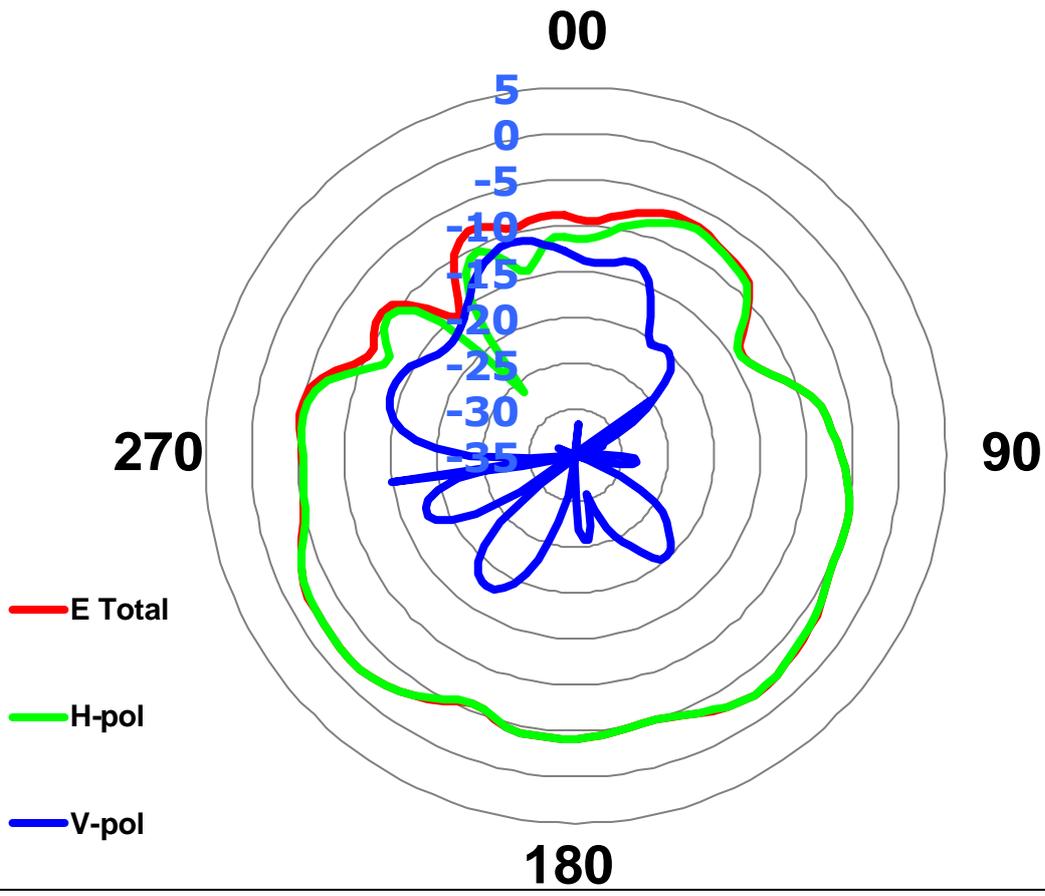

- E Total
- H-pol
- V-pol


	H-pol	V pol
Peak Gain	-2.02	-10.86

ANT8 @ 1950 MHz

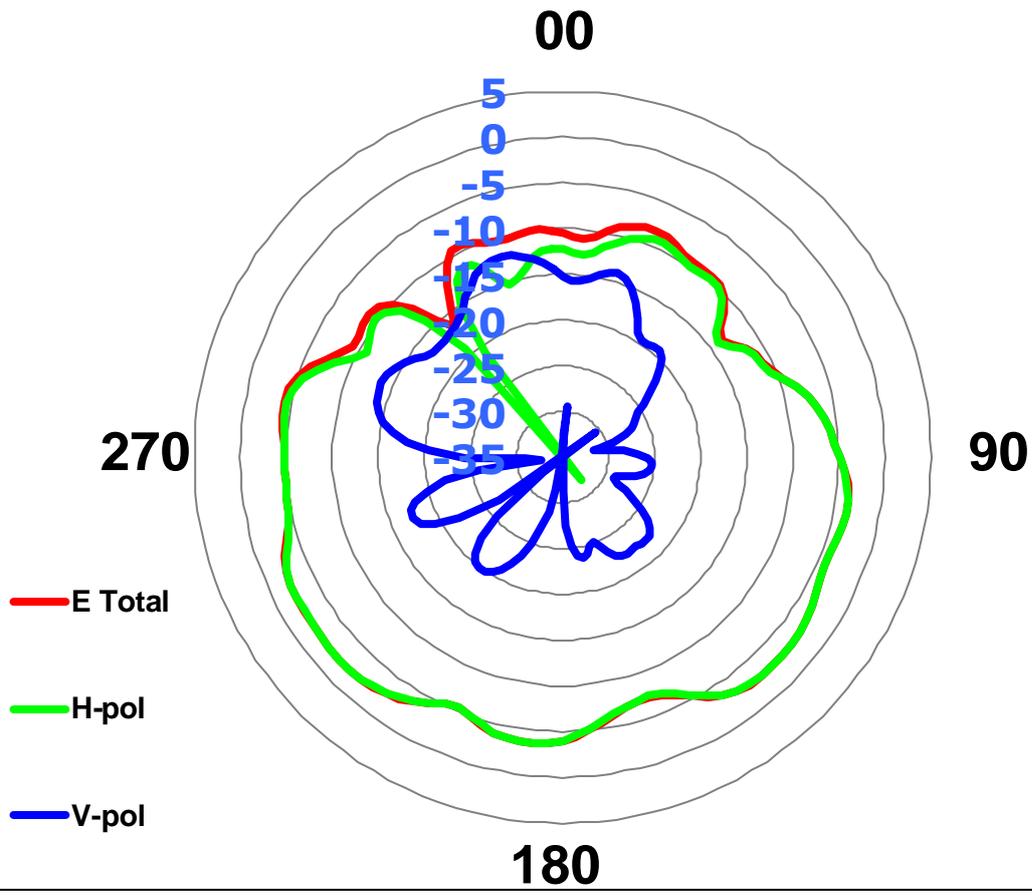


	H-pol	V pol
Peak Gain	-2.07	-12.05

ANT8 @ 1980 MHz

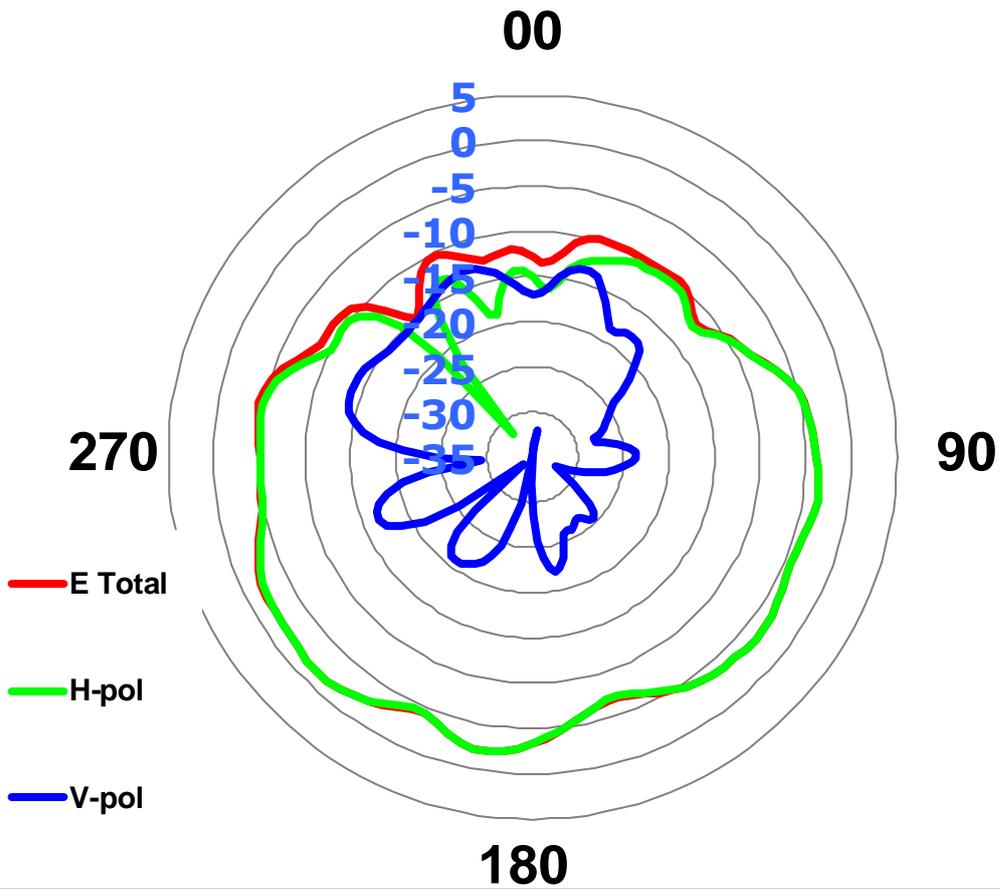


	H-pol	V pol
Peak Gain	-1.41	-13.16

ANT8 @ 2496 MHz

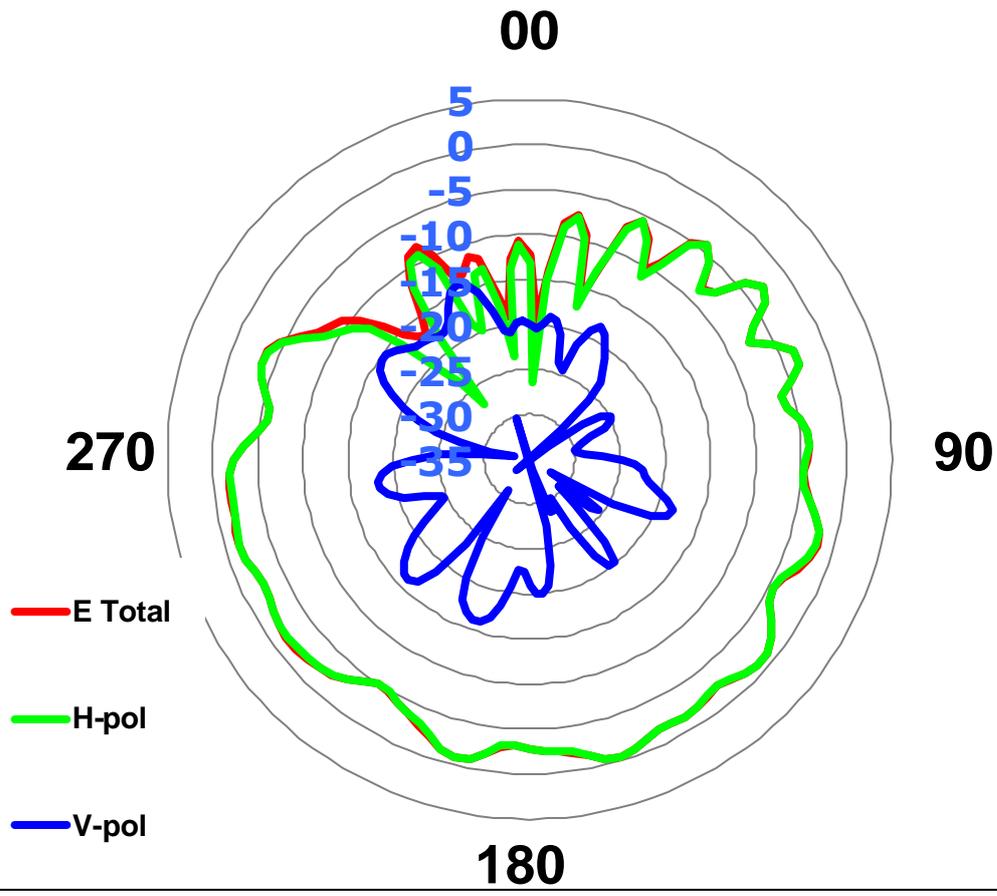


	H-pol	V pol
Peak Gain	-0.36	-14.03

ANT8 @ 2595 MHz

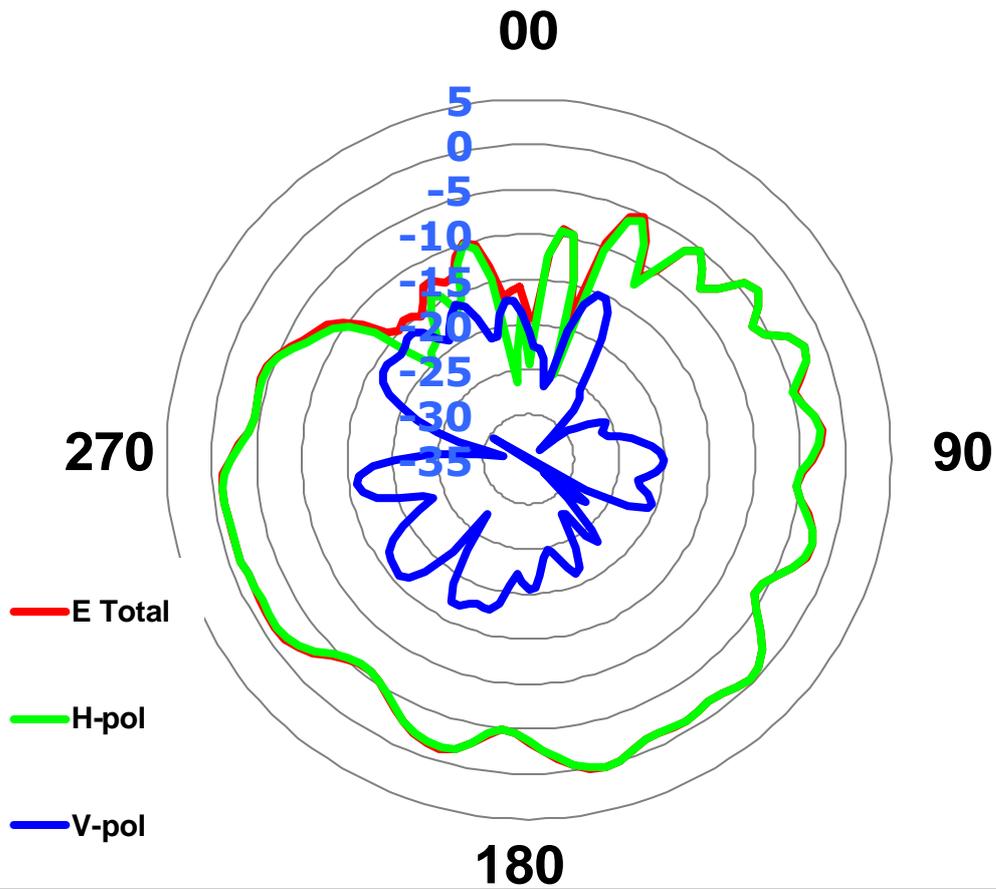


	H-pol	V pol
Peak Gain	0.28	-15.26

ANT8 @ 2690 MHz

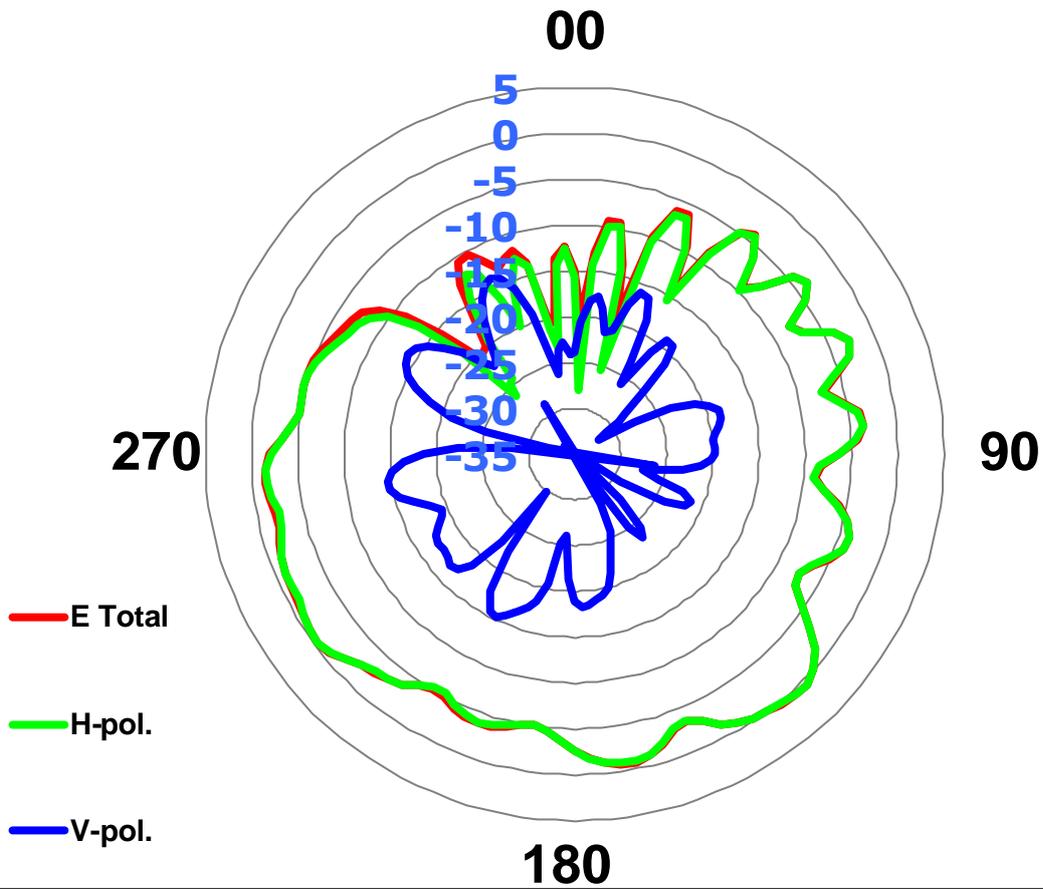


	H-pol	V pol
Peak Gain	0.62	-13.76

ANT8 @ 3300 MHz

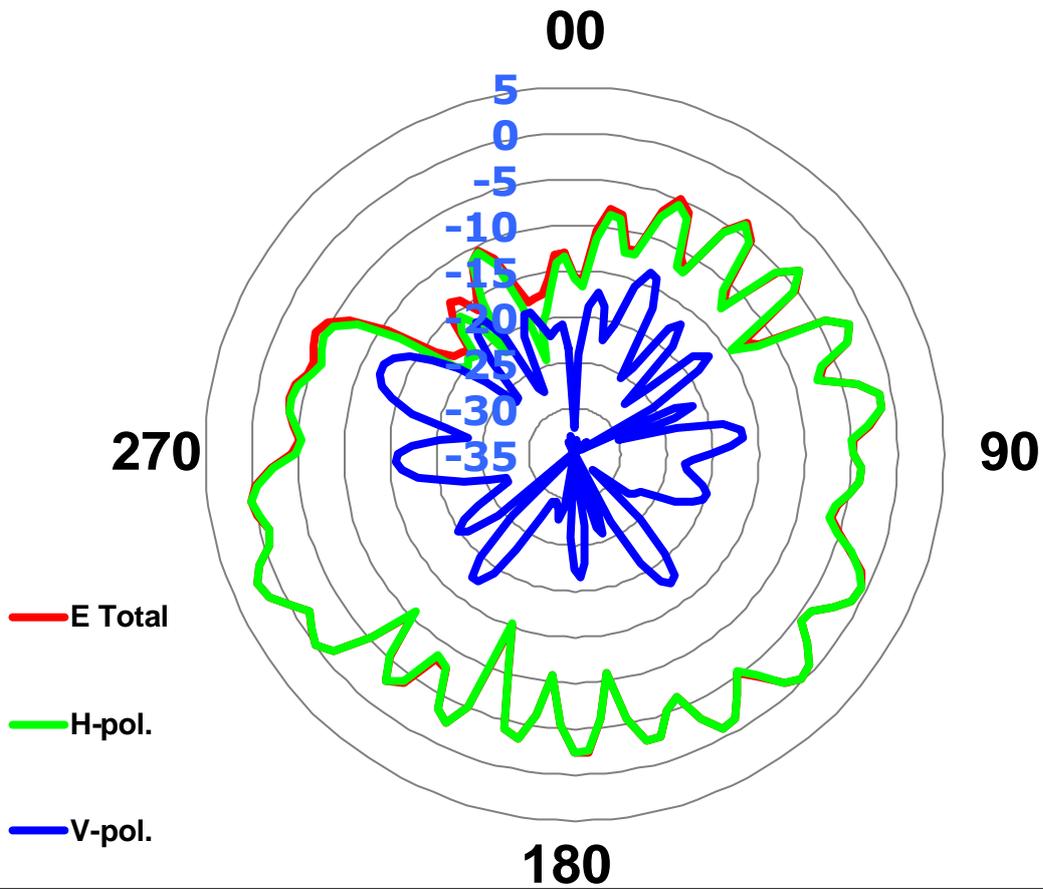


	H-pol	V pol
Peak Gain	2.11	-12.10

ANT8 @ 3400 MHz

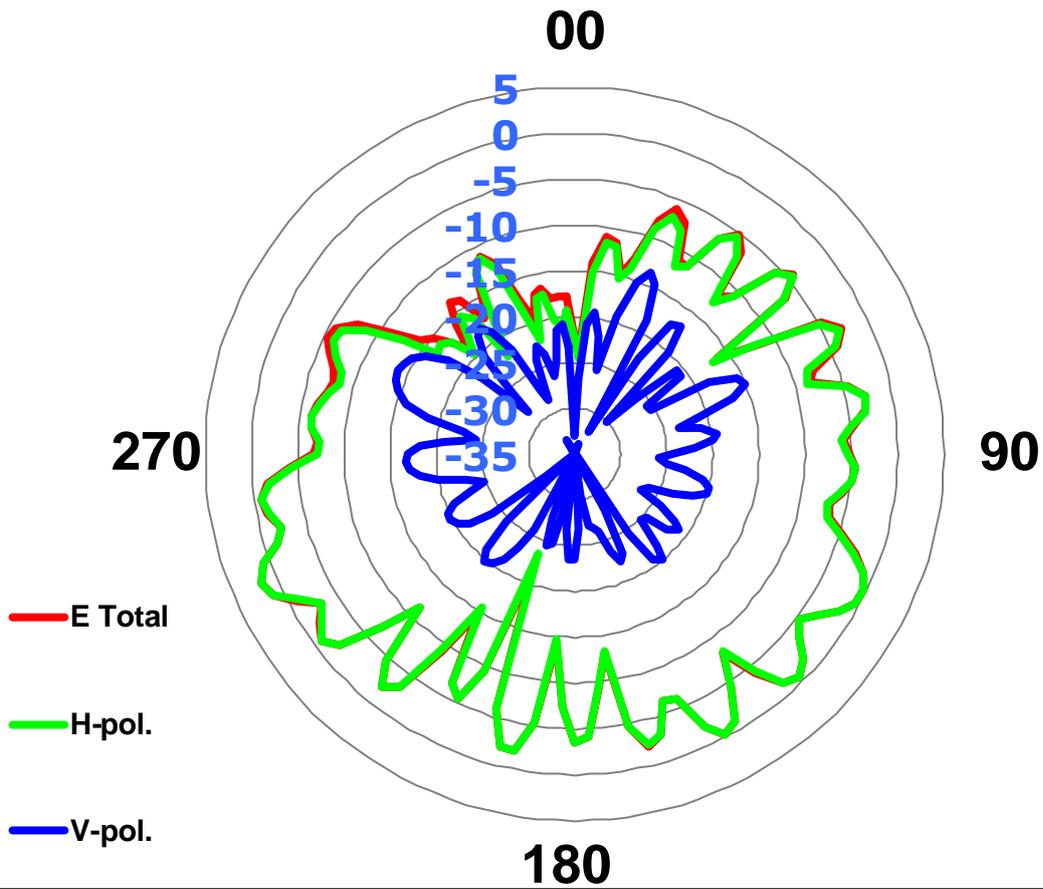


	H-pol	V pol
Peak Gain	1.76	-13.57

ANT8 @ 3500 MHz

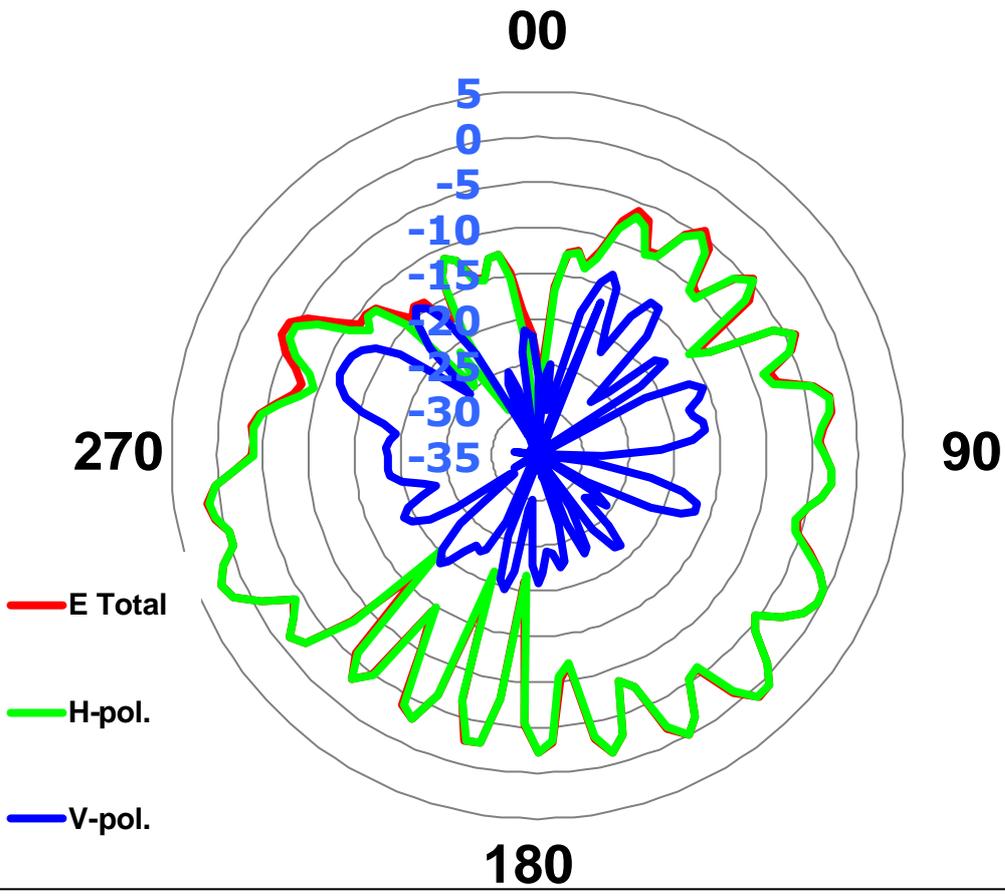

	H-pol	V pol
Peak Gain	2.37	-11.66


ANT8 @ 3600 MHz

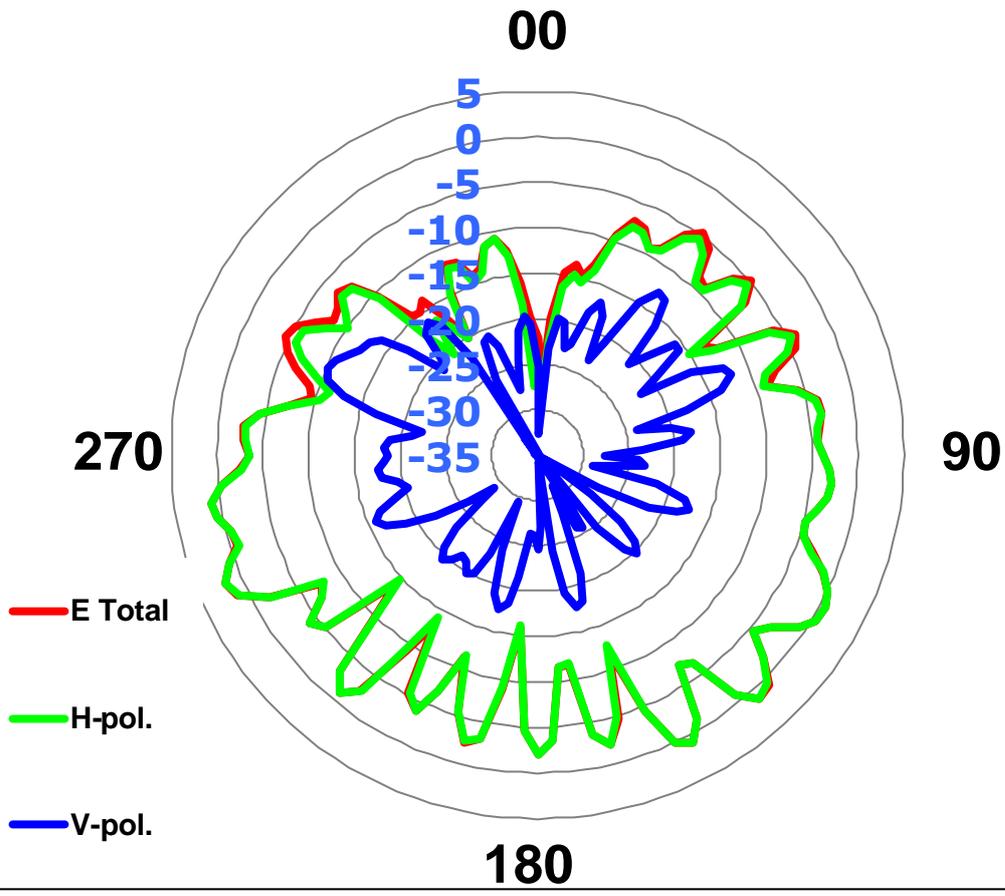

— E Total
 — H-pol.
 — V-pol.

	H-pol	V pol
Peak Gain	1.80	-10.22


ANT8 @ 3750 MHz

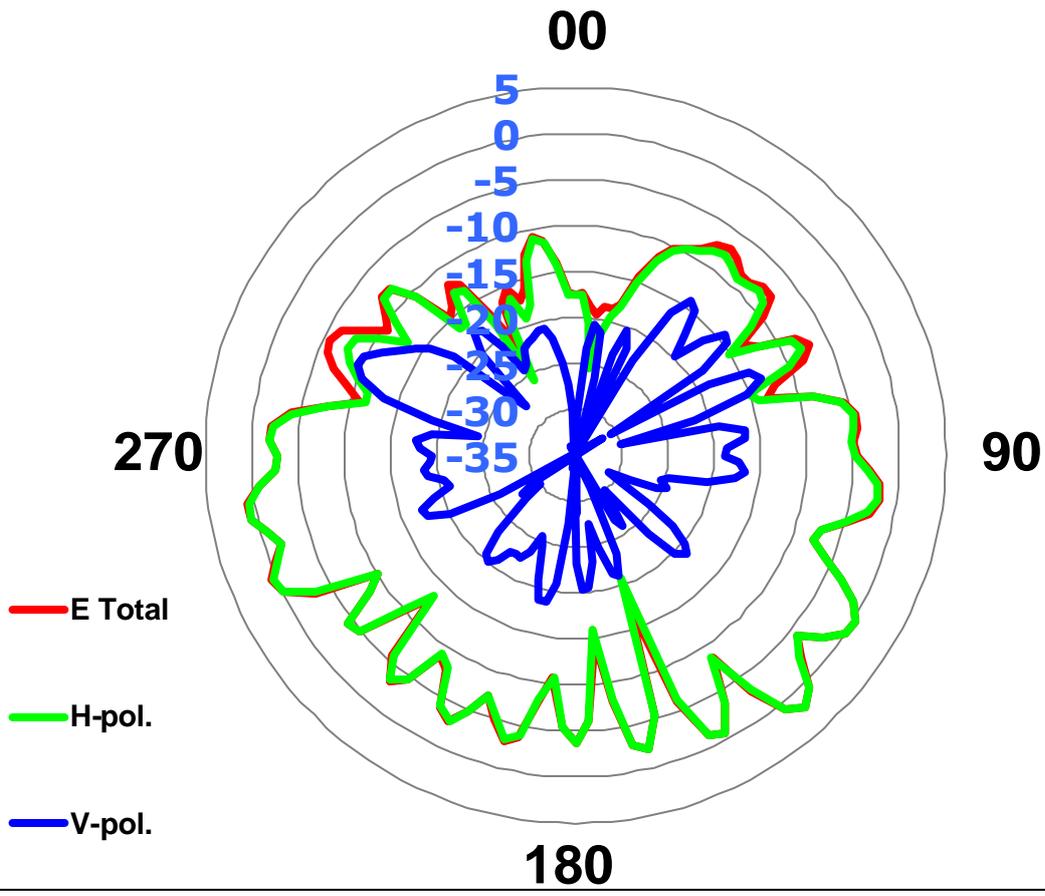

- E Total
- H-pol.
- V-pol.


	H-pol	V pol
Peak Gain	1.94	-9.46

ANT8 @ 4200 MHz

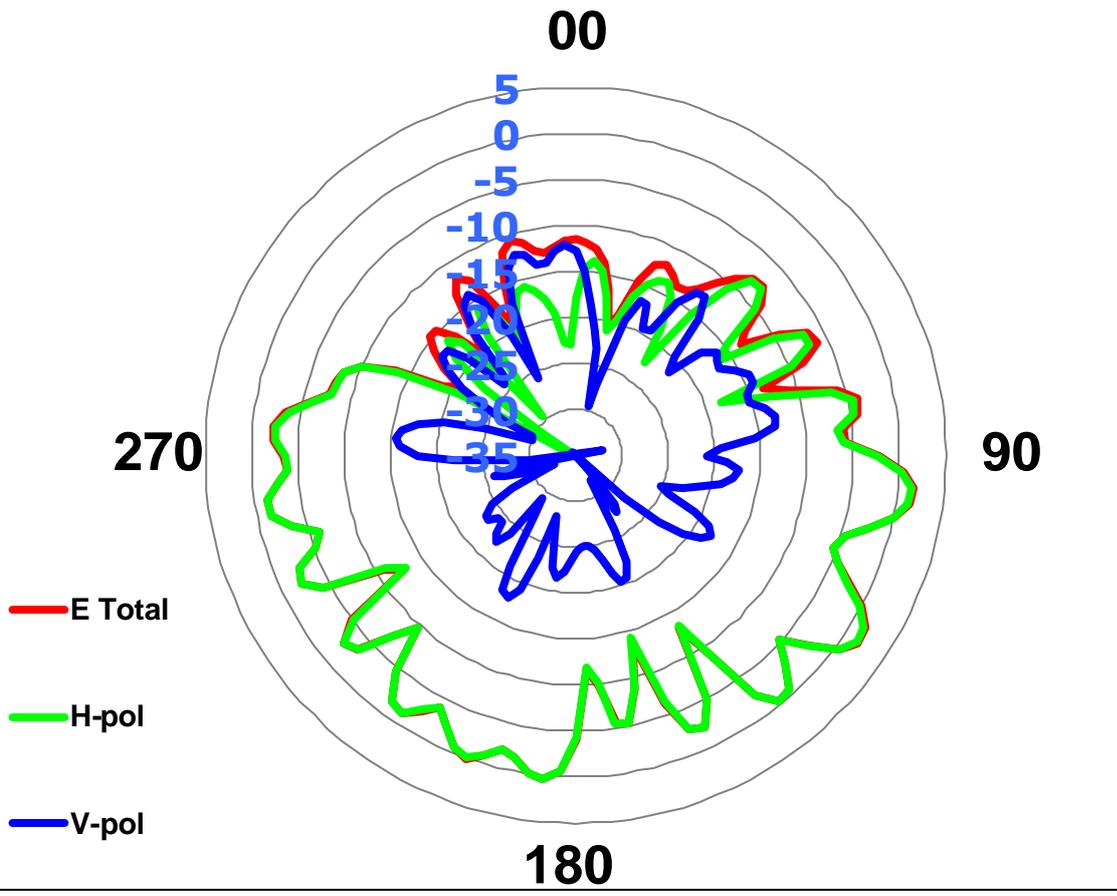


	H-pol	V pol
Peak Gain	1.66	-12.02

ANT8 @ 4400 MHz

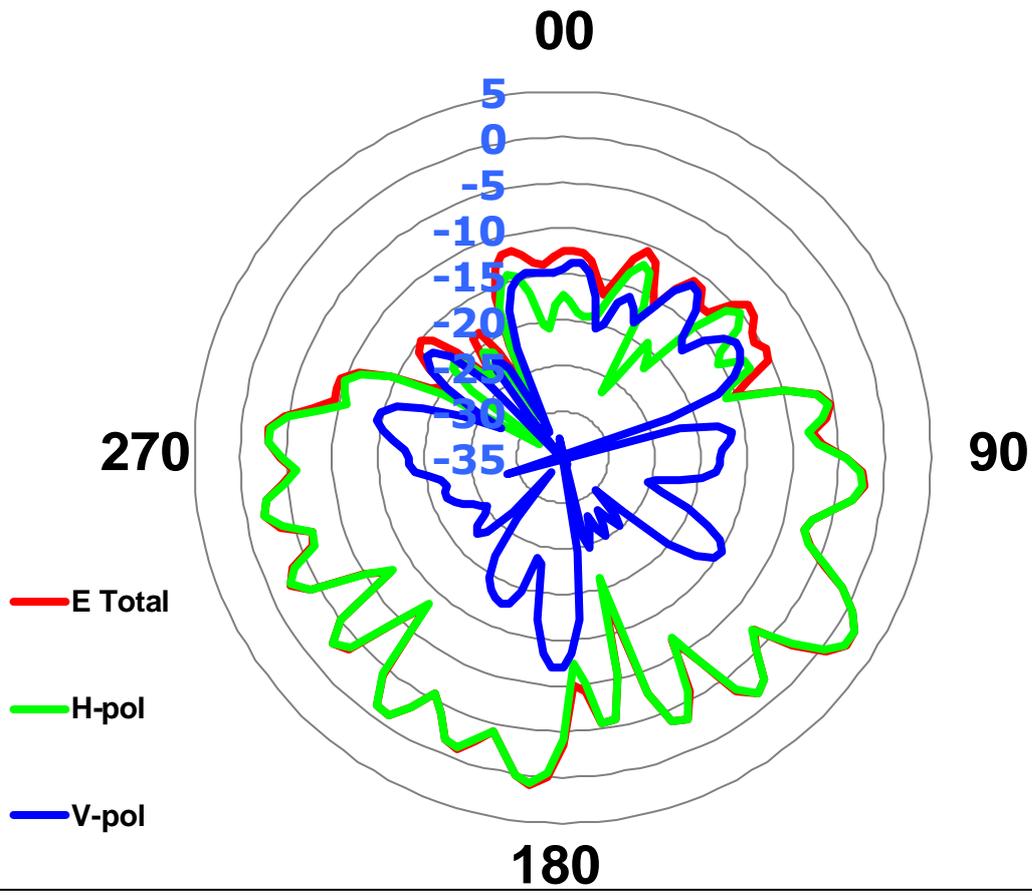


	H-pol	V pol
Peak Gain	1.93	-11.56

ANT8 @ 4800 MHz

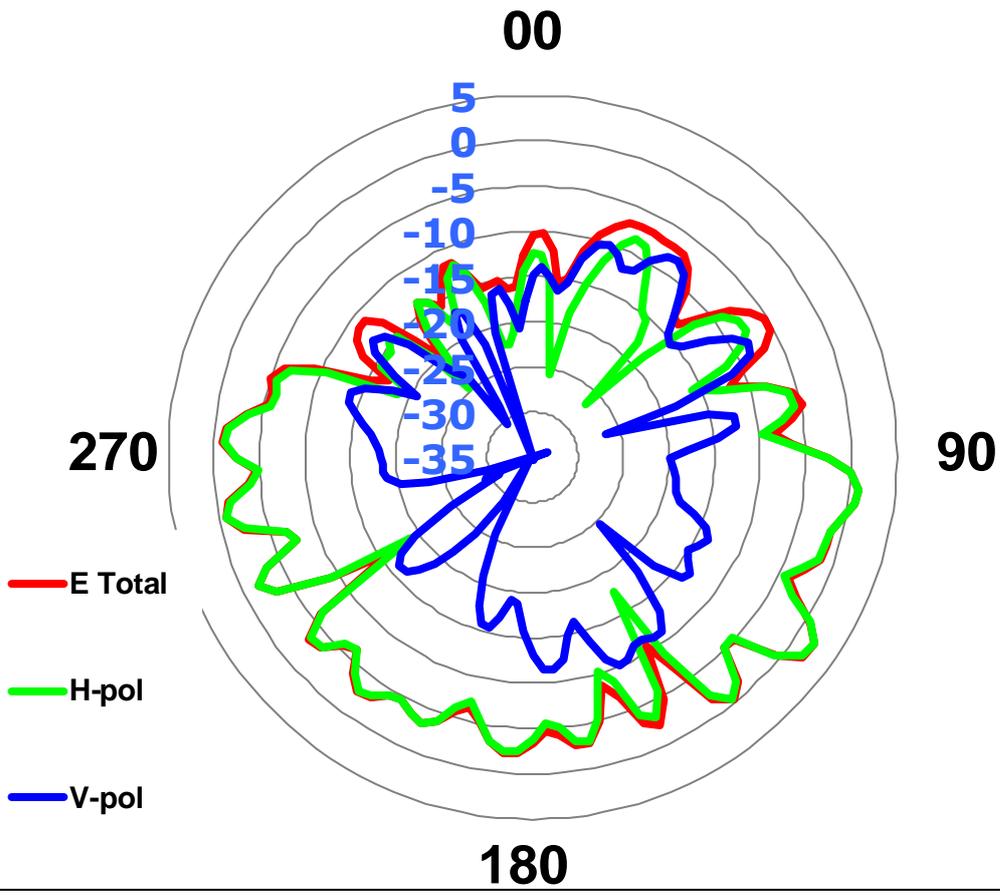

	H-pol	V pol
Peak Gain	2.15	-8.00

ANT8 @ 5000 MHz

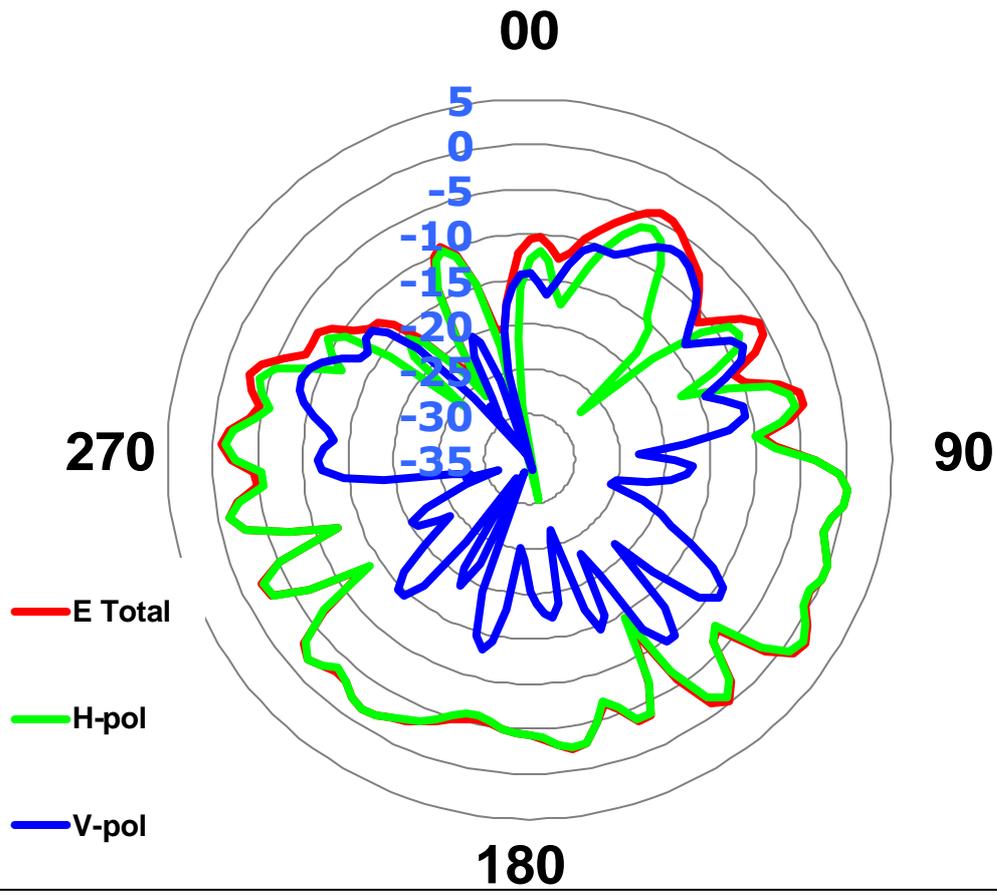


	H-pol	V pol
Peak Gain	1.39	-6.84

Section 4. Host Platform Information

OEM / ODM Host platform: Example (Quanta/Rainer 1.0) platform correlated to antenna data


Rating Label Photo:

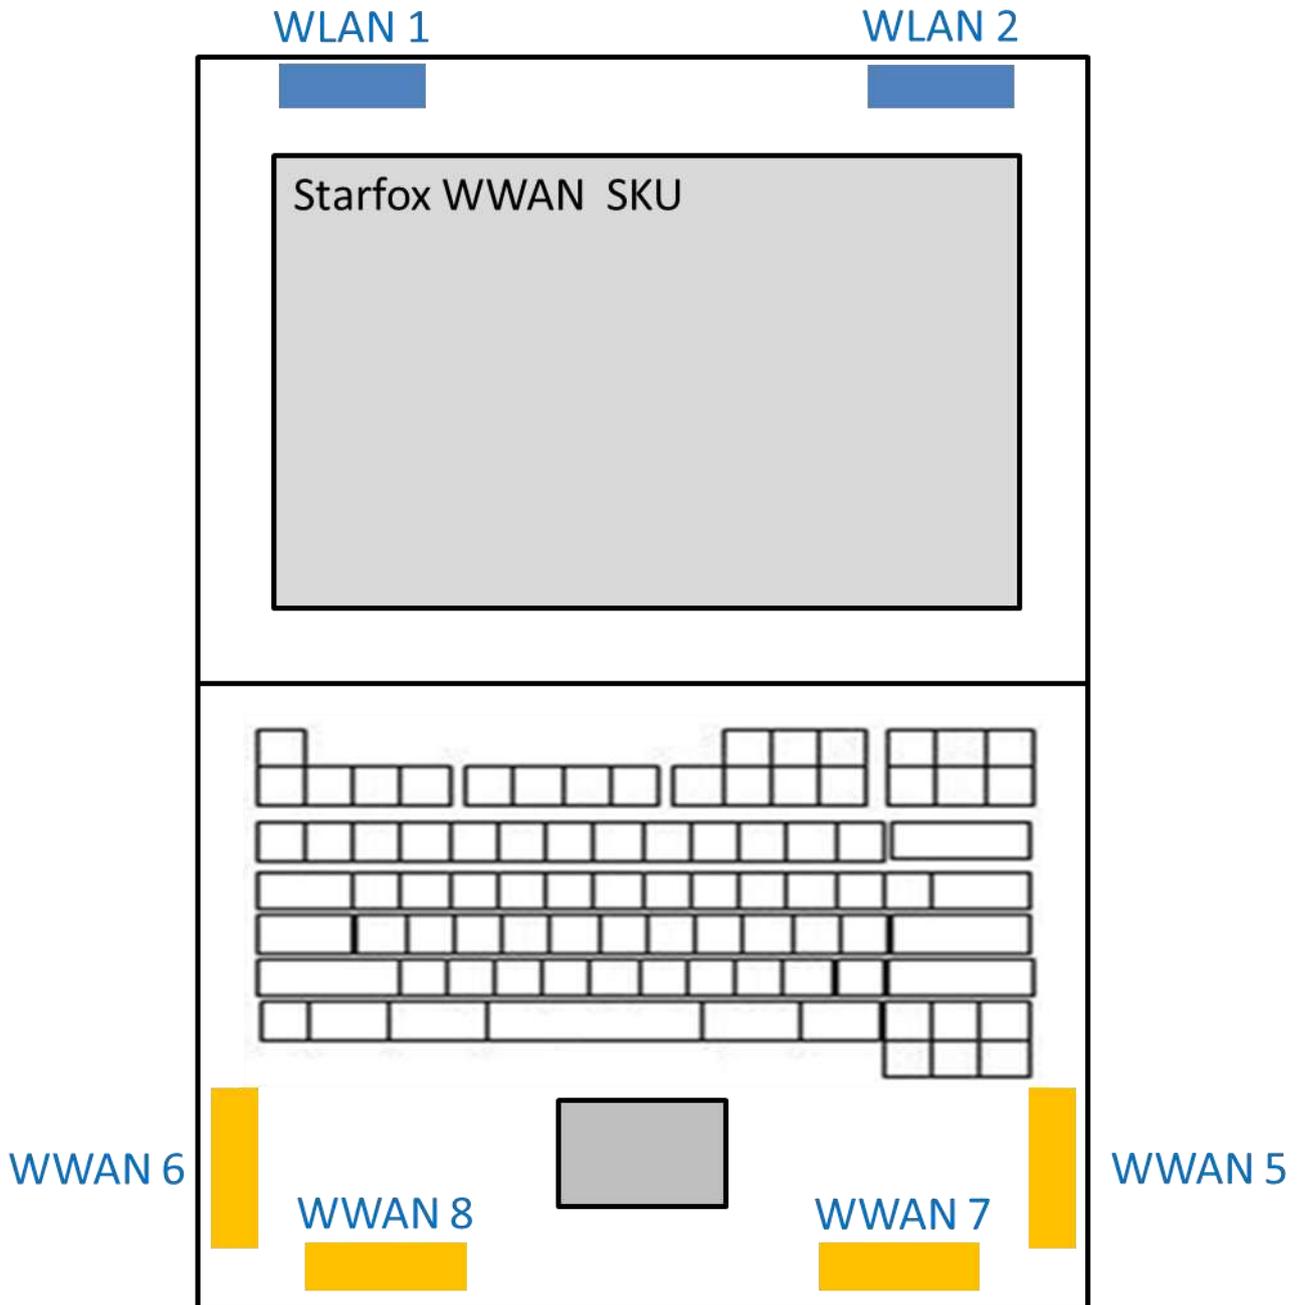

Section 5. Antenna Host Platform Location Information



Include a **dimensioned photo(s) or dimensioned drawing(s)** of Ant5, Ant6, Ant7, Ant8 placements (measurements are not required for receive-only antenna).

Any antenna that transmits must show dimensions to bottom of laptop. Provide a description of the materials that are used for supporting or surrounding transmit antennas; for example, non-conductive plastics vs. conductive coated plastic or metallic materials.

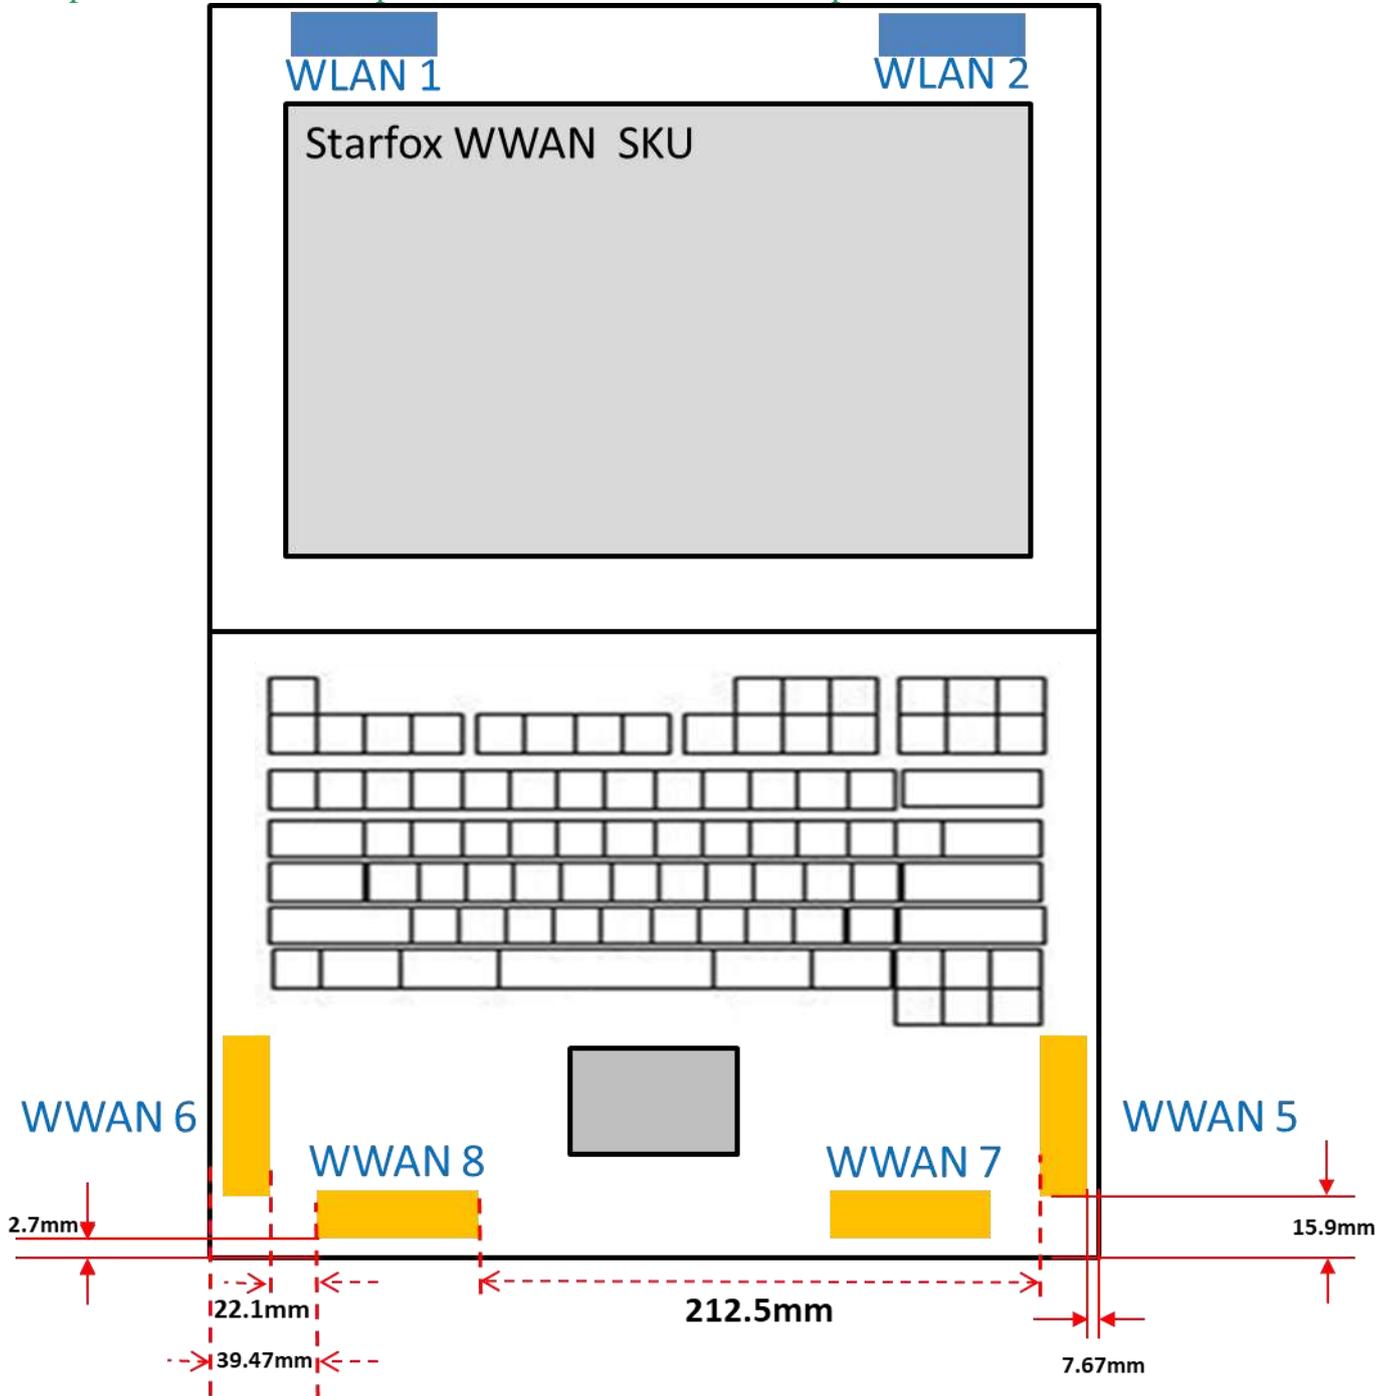


Section 6. Antenna dimensional information for SAR evaluation

Include a **dimensioned photo(s) or dimensioned drawing(s)** showing the distance (mm) between the transmit antennas and the user (excluding hands, wrist, feet, and ankle). For notebook/laptop hosts show lapheld position (example below). For tablet hosts show all orientations including lapheld, primary & secondary portrait, primary & secondary landscape positions. Include a description of any proximity sensors or power throttling implementations that limit or exclude use of any host orientation.

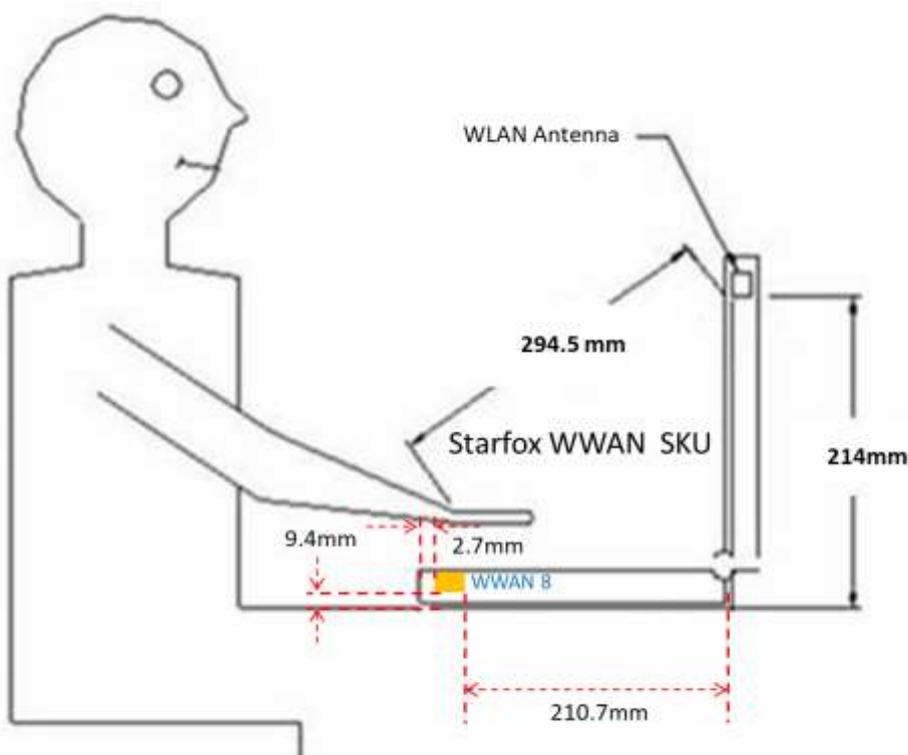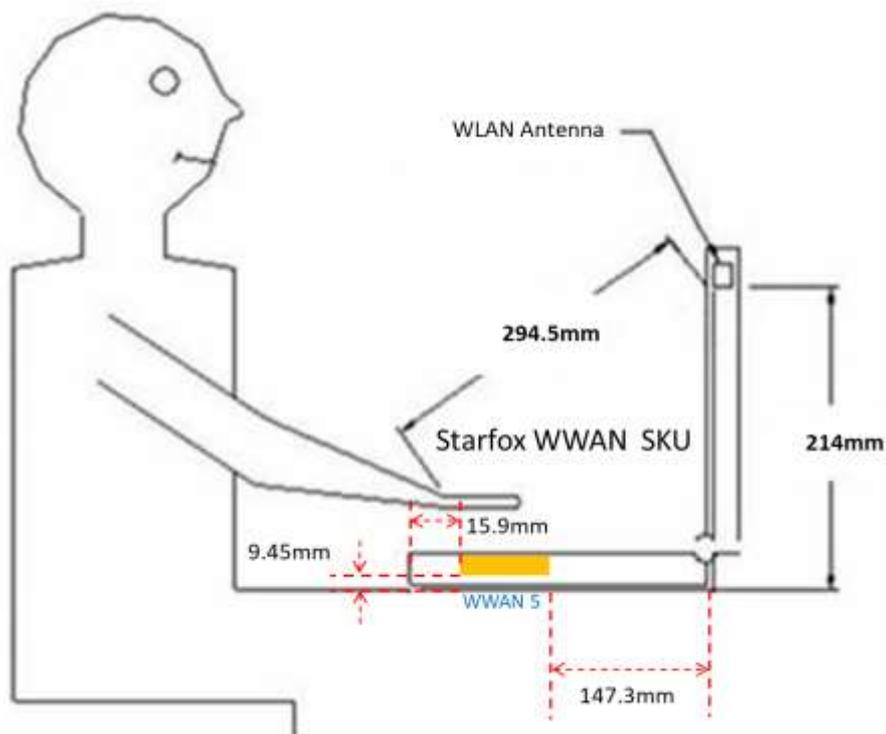

Section 7. Diagram Example of Co-Location Antenna Separation

Include a **dimensioned photo or dimensioned drawing** showing the distance (mm) between **all WLAN transmit antennas** and other co-located radiator transmit antenna such as Bluetooth, WWAN,..

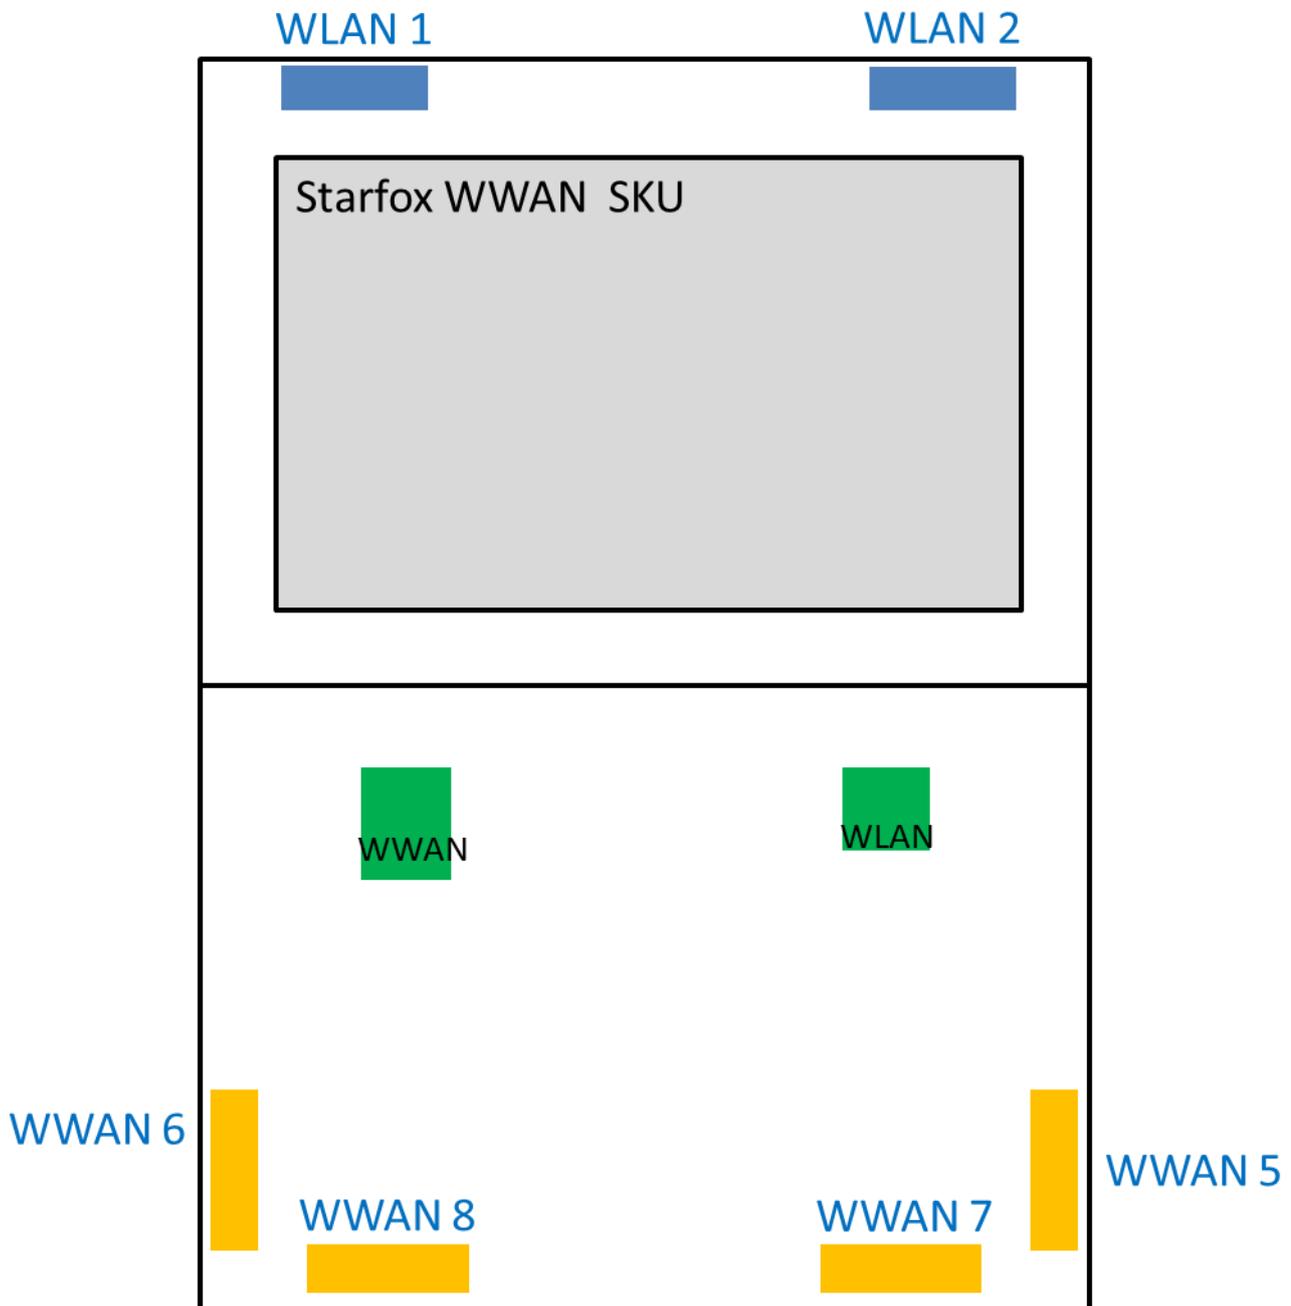

Section 8. Local representative contact information

Local representative contact information is required for regulatory support for target countries below.

	Local company name	Contact name	Phone number	FAX Number	e-Mail Address	Notes
Argentina						
Azerbaijan						
Cambodia						
Indonesia						
Israel						
Malaysia						
Philippines						
Singapore						Telecommunication Equipment Dealer License Required
South Africa						
USA, Canada						
Vietnam						