

TEST REPORT

EUT Description	WWAN module installed on Convertible PC
Brand Name	HP
Model Name	HSN-I55C
FCC ID	B94HNI55CKL
Date of Test Start/End	2022-04-18 / 2022-06-16
Features	WWAN (5G NR, LTE, UMTS), WLAN, BT (see section 6)
Description	HP HSN-I55C + HongBo antennas

Applicant	HP Inc.
Address	1501 Page Mill Road, Palo Alto CA 94304 USA
Contact Person	Sam Lin
Telephone / Email	+886 2 37896331 / sam.lin2@hp.com

Reference Standards	FCC 47 CFR Part §2.1093 (see section 1)	
RF Exposure Environment	Portable devices - General population/uncontrolled exposure	
Exposure Conditions	Body worn	
	SAR Result	SAR Limit
Maximum SAR Result & Limit	1.31 W/kg (1g)	1.6 W/kg (1g)
Min. test separation distance	0mm to phantom, 2.834mm to antenna edge	

Test Report identification	220316-05.TR03
Revision Control	Rev. 02 This test report revision replaces any previous test report revision (See section 9)

The test results relate only to the samples tested.
Reference to accreditation shall be used only by full reproduction of test report.

Issued by

Reviewed by

Edgar GARCIA
(SAR Test Lead Engineer)

Zayd OUACHICHA
(Technical Manager)

Intel Corporation S.A.S – WRF Lab
425 rue de Goa – Le Cargo B6 - 06600 Antibes, France
Tel. +33493001400 / Fax +33493001401

Table of Contents

1. Standards, reference documents and applicable test methods	4
2. General conditions, competences and guarantees	4
3. Preface	5
4. Environmental Conditions	6
5. Test samples	6
6. EUT Features	7
7. Remarks and comments	16
8. Test Verdicts summary	16
9. Document Revision History	17
Annex A. Test & System Description	18
A.1 SAR DEFINITION.....	18
A.2 SAR MEASUREMENT SYSTEM	19
A.2.1 SAR Measurement Setup.....	19
A.2.2 E-Field Measurement Probe.....	20
A.2.3 Flat Phantom	20
A.2.4 Device Positioner.....	21
A.3 DATA EVALUATION	22
A.4 SYSTEM AND LIQUID CHECK	24
A.4.1 System Check	24
A.4.2 Liquid Check.....	25
A.5 TEST EQUIPMENT LIST	26
A.5.1 SAR System #2*.....	26
A.5.2 SAR System #4**	26
A.5.3 Shared Instrumentation	27
A.5.4 Tissue Simulant Liquid	27
A.6 MEASUREMENT UNCERTAINTY EVALUATION	28
A.7 RF EXPOSURE LIMITS	29
Annex B. Test Results	30
B.1 TEST CONDITIONS.....	30
B.1.1 Test SAR Test positions relative to the phantom.....	30
B.1.2 Test signal, Output power and Test Frequencies	31
B.1.3 Evaluation Exclusion and Test Reductions.....	32
B.2 CONDUCTED POWER MEASUREMENTS.....	36
B.2.1 WCDMA / HSPA / DC-HSPA.....	36
B.2.2 LTE.....	42
B.2.3 Intra-Band Contiguous.....	103
B.2.4 5G NR (FR1)	104
B.3 TISSUE PARAMETERS MEASUREMENT	133
B.4 SYSTEM CHECK MEASUREMENTS	134
B.5 SAR TEST RESULTS	136
B.5.1 WCDMA.....	136
B.5.2 LTE.....	137
B.5.3 5G NR.....	147
B.5.4 ENDC	151
B.5.5 SAR Measurement Variability.....	152
B.5.6 Simultaneous Transmission SAR Evaluation.....	153

Annex C. Test System Plots..... 160

Annex D. TSL Dielectric Parameters..... 211

D.1 BODY 600MHZ-900MHZ SAR SYSTEM 2 211

D.2 BODY 600MHZ-950MHZ – SYSTEM 4..... 212

D.3 BODY 1700MHZ-2350MHZ SAR SYSTEM 2 214

D.4 BODY 1700MHZ-1950MHZ – SYSTEM 4 215

D.5 BODY 2500MHZ-2700MHZ SAR SYSTEM 2 217

D.6 BODY 2300MHZ-2700MHZ SYSTEM 4 218

D.7 BODY 3500MHZ-3900MHZ SAR SYSTEM 2 220

D.8 BODY 3500MHZ-3900MHZ SYSTEM 4 221

Annex E. Calibration Certificates 223

Annex F. Photographs 225

F.1 TEST SAMPLES 225

F.2 TEST POSITIONS..... 228

F.3 ANTENNA HOST PLATFORM LOCATION AND ADJACENT EDGE POSITIONS RELATIVE TO THE BODY 229

F.4 PHANTOM LIQUID LEVEL DURING MEASUREMENTS 231

1. Standards, reference documents and applicable test methods

FCC	<ol style="list-style-type: none">1. FCC Title 47 CFR Part §2.1093 – Radiofrequency radiation exposure evaluation: portable devices. 2019-10-01 Edition2. FCC OET KDB 447498 D01 v06 – RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices.3. FCC OET KDB 616217 D04 v01r02 – SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers.4. FCC OET KDB 865664 D01 v01r04 – SAR Measurement Requirements for 100 MHz to 6 GHz.5. FCC OET KDB 865664 D02 v01r02 – RF Exposure Compliance Reporting and Documentation Considerations.6. FCC OET KDB 941225 D05 v02r05 – SAR Evaluation Considerations for LTE Devices.7. FCC OET KDB 941225 D01 v03r01 – 3G SAR Measurement Procedures.8. IEEE Std 1528-2013 – IEEE Recommended Practice Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques...9. TCB Workshop Nov 2017 71-RF-Exposure-TCB-Slides-LTE UL/DL Carrier Aggregation SAR10. TCB workshop November 2019; RF Exposure Policy Updates (5G NR FR1 NSA EN-DC UE SAR Evaluations), the FCC OET KDB 941225 D05 rules apply.
-----	--

2. General conditions, competences and guarantees

- ✓ Tests performed under FCC standards identified in section 1 are covered by A2LA accreditation.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2017 laboratory accredited by the American Association for Laboratory Accreditation (A2LA) with the certificate number 3478.01.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an Accredited Test Firm recognized by the FCC, with Designation Number FR0011.
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.

3. Preface

The HSN-I55C Convertible PC includes the Time Averaging SAR (TAS) concept. The TAS algorithm is implemented in the Fibocom M2 FM350-GL modem, which is embedded in the FM350-GL cellular module (FCC ID: ZMOFM350GL).

The implementation details and TAS operating characteristics are described in a separated document [1]. The validation of algorithm operations is performed by Intel Corporation according to the range of commonly used accessible control parameters used for typical host products. The validation results are reported in document [2].

The FCC SAR limit is a time averaged exposure metric. At host level, the normally required SAR test procedures are applicable for SAR compliance testing at upper-threshold values of the algorithm, which is the maximum output power level for continuous time-averaging operations TAS algorithm enforces. The reliability of this has been demonstrated by results in the Algorithm Validation Test Report [2].

The model supports simultaneous transmission of WWAN, BT and WLAN. The TAS algorithm is only applied to WWAN cellular module.

The SAR evaluation of WWAN is performed in this report as well as the RF exposure assessment for simultaneous transmission of WWAN, WLAN and BT.

[1] *210317_TAS_Operational_Report_Rev01*

[2] *201029-02.TR01_Rev01_Validation Report for 5G Time Averaging Algorithm*

[3] 220316-03.TR03_FCC-IC_WLAN_SAR_HP HSN-I55C_AX211D2W

[4] 220316-03.TR06 - FCC_WiFi_6E_SAR_PD_HP HSN-I55C_AX211D2W WLAN-WWAN sku

4. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	22.1°C ± 2°C
Humidity	40% ± 20%
Liquid Temperature	21.8°C ± 2°C

5. Test samples

Sample	Control #	Description	Model	Serial #	Date of receipt	Comment
#01	220316-05.S03	WWAN module installed on Convertible PC	HSN-I55C	00027705HB	2021-03-21	Used WCDMA / LTE tests
#02	220316-05.S02	WWAN module installed on Convertible PC	HSN-I55C	00027705FL	2022-03-21	Used for Notebook Mode 5G NR
#03	220316-05.S04	WWAN module installed on Convertible PC	HSN-I55C	00027705FM	2022-03-21	Used for Tablet Mode 5G NR

6. EUT Features

The herein information is provided by the customer.

Intel WRF Lab declines any responsibility for the accuracy of the stated customer provided information, especially if it has any impact on the correctness of test results presented in this report.

Brand Name	HP
Model Name	HSN-I55C
Prototype / Production	Production
Host Identification	HSN-I55C

Supported radios

WWAN:

Mode	Bands	Supported Tx Mode			
		RMC	HSDPA	HSUPA	DC-HSDPA
WCDMA / HSPA+	FDD II (1850.0 – 1910.0 MHz)	✓	✓	✓	✓
	FDD IV (1710.0 – 1755.0 MHz)	✓	✓	✓	✓
	FDD V (824.0 – 849.0 MHz)	✓	✓	✓	✓

FDD/TDD	Bands	Modulations	Bandwidth					
			1.4	3	5	10	15	20
LTE FDD	Band 2 (1850.0 – 1910.0 MHz)	QPSK/16QAM/64QAM/256QAM	✓	✓	✓	✓	✓	✓
	Band 4 (1710.0 – 1755.0 MHz)	QPSK/16QAM/64QAM/256QAM	✓	✓	✓	✓	✓	✓
	Band 5 (824.0 – 849.0 MHz)	QPSK/16QAM/64QAM/256QAM	✓	✓	✓	✓		
	Band 7 (2500.0 – 2570.0 MHz)	QPSK/16QAM/64QAM/256QAM			✓	✓	✓	✓
	Band 12 (699.0 – 716.0 MHz)	QPSK/16QAM/64QAM/256QAM	✓	✓	✓	✓		
	Band 13 (777.0 – 787.0 MHz)	QPSK/16QAM/64QAM/256QAM			✓	✓		
	Band 14 (788.0 – 798.0 MHz)	QPSK/16QAM/64QAM/256QAM			✓	✓		
	Band 17 (704.0 – 716.0 MHz)	QPSK/16QAM/64QAM/256QAM			✓	✓		
	Band 25 (1850.0 – 1915.0 MHz)	QPSK/16QAM/64QAM/256QAM	✓	✓	✓	✓	✓	✓
	Band 26 (814.0 – 849.0 MHz)	QPSK/16QAM/64QAM/256QAM	✓	✓	✓	✓	✓	
	Band 30 (2305.0 – 2315.0 MHz)	QPSK/16QAM/64QAM/256QAM			✓	✓		
	Band 66 (1710.0 – 1780.0 MHz)	QPSK/16QAM/64QAM/256QAM	✓	✓	✓	✓	✓	✓
Band 71 (663.0 – 698.0 MHz)	QPSK/16QAM/64QAM/256QAM			✓	✓	✓	✓	
LTE TDD	Band 38 (2570.0 – 2620.0 MHz)	QPSK/16QAM/64QAM/256QAM			✓	✓	✓	✓
	Band 41 (2496.0 – 2690.0 MHz)	QPSK/16QAM/64QAM/256QAM			✓	✓	✓	✓
	Band 48 (3550.0 – 3700.0 MHz)	QPSK/16QAM/64QAM/256QAM			✓	✓	✓	✓

Bands	Modulation	SCS (KHz)	Bandwidth													
			5	10	15	20	25	30	40	50	60	70	80	90	100	
N2 FDD (1850.0 – 1910.0 MHz)	PI/2 BPSK QPSK 16QAM 64QAM 256QAM	15 30	✓	✓	✓	✓										
N5 FDD (824.0 – 849.0 MHz)	PI/2 BPSK QPSK 16QAM 64QAM 256QAM	15 30	✓	✓	✓	✓										
N7 FDD (2500.0 – 2570.0 MHz)	PI/2 BPSK QPSK 16QAM 64QAM 256QAM	15 30	✓	✓	✓	✓										
N25 FDD (1850.0 – 1915 MHz)	PI/2 BPSK QPSK 16QAM 64QAM 256QAM	15 30	✓	✓	✓	✓										
N30 FDD (2305.0 – 2315.0 MHz)	PI/2 BPSK QPSK 16QAM 64QAM 256QAM	15 30	✓	✓												
N38 TDD (2570.0 – 2620.0 MHz)	PI/2 BPSK QPSK 16QAM 64QAM 256QAM	15 30	✓	✓	✓	✓										
N41 TDD (2496.0 – 2690.0 MHz)	PI/2 BPSK QPSK 16QAM 64QAM 256QAM	15 30				✓			✓	✓	✓			✓	✓	✓
N66 FDD (1710.0 – 1780.0 MHz)	PI/2 BPSK QPSK 16QAM 64QAM 256QAM	15 30	✓	✓	✓	✓			✓							
N71 FDD (663.0 – 698.0 MHz)	PI/2 BPSK QPSK 16QAM 64QAM 256QAM	15 30	✓	✓	✓	✓										
N77 TDD* (3700.0 – 3980.0 MHz)	PI/2 BPSK QPSK 16QAM 64QAM 256QAM	15 30		✓	✓	✓			✓	✓	✓			✓	✓	✓
N78 TDD** (3700.0 – 3800.0 MHz)	PI/2 BPSK QPSK 16QAM 64QAM 256QAM	15 30		✓	✓	✓			✓	✓	✓			✓	✓	✓

*FCC limits 5G NR B77 to 3700-3980MHz

** FCC limits 5G NR B78 to 3700-3800MHz

UL carrier aggregation LTE (Inter-Band)		UL carrier aggregation LTE (Intra-band)
2A – 5A	5A – 48A	5B
2A – 12A	5A – 66A	7C
2A – 13A	12A – 30A	38C
2A – 14A	12A – 66A	41C
2A – 48A	13A – 48A	48C
4A – 5A	13A – 66A	66B
4A – 12A	14A – 30A	66C
4A – 13A	14A – 66A	
5A – 7A	25A – 26A	
5A – 30A	48A – 66A	

EN/DC possible combinations	
NR 5G Band	Associated LTE Bands
N2A	5, 12, 13, 14
N5A	2, 7, 30, 66, 48
N66A	5, 12, 13, 48
N41A	2, 66, 41
N71A	2, 66
N77A	2, 5, 12, 13, 14, 30, 66, 41
N78A	2, 5, 7, 38

UL carrier aggregation 5G FR1
n2A – n5A
n5A – n66A

WLAN

Mode	UL Freq Range
802.11b/g/n/ax	2.4GHz (2400.0 – 2483.5 MHz)
802.11a/n/ac/ax	5.2GHz (5150.0 – 5250.0 MHz) 5.3GHz (5250.0 – 5350.0 MHz) 5.6GHz (5470.0 – 5725.0 MHz) 5.8GHz (5725.0 – 5850.0 MHz)
802.11ax	6.0GHz (5925.0 – 7125.0 MHz)
Bluetooth v5.2 & BLE	2.4GHz (2400.0 – 2483.5 MHz)

Antenna Information “information provided by the applicant”		
The DUTs have 2 WWAN TX antenna ports:		
Transmitter	Antenna 5 TX/RX	Antenna 8 TX/RX
Manufacturer	HongBo	HongBo
Antenna type	PIFA antenna	PIFA antenna
Part number	6036B0317401 (00-3302701450)	6036B0317501 (00-2602751850)
See Annex F for more details on antennas location.		

WWAN Antenna Mapping		
Configuration	Main (Ant 5)	Aux (Ant 8)
WCDMA	LB / MHB	
LTE	LB / MHB	
		UHB
NR 5G SA	(LB / MHB)	
		UHB
LTE ULCA	LB	MHB / UHB
	MHB	UHB
	B41	UHB
NR 5G ENDC	LB	MHB / B41
	B41	N41
	MHB	B41/N41
	B41/N41	UHB
	MHB	UHB
NR 5G ULCA	LB	MHB

- LB: WCDMA FDD V, LTE B5/12/13/14/17/26/71, 5G NR n5/n71
- MHB: WCDMA FDD II/ FDD IV, LTE B2/4/7/25/30/66/38, 5G NR n2/n7/n25/n30/n38/n66
- UHB: LTE: B41/48; NR 5G: n41/n77/n78

Note: For EN-DC mode the 4G and 5G carriers transmit on separate antennas.
For inter-bands on LTE and NR 5G ULCA the carriers transmit on separate antennas.

Simultaneous Transmission Configurations

- WWAN Main (Ant5) + WWAN Aux (Ant8) + WLAN 2.4GHz Main + BT Aux
- WWAN Main (Ant5) + WWAN Aux (Ant8) + WLAN 2.4GHz Main + WLAN 2.4GHz Aux
- WWAN Main (Ant5) + WWAN Aux (Ant8) + WLAN 5GHz Main + BT Aux
- WWAN Main (Ant5) + WWAN Aux (Ant8) + WLAN 5GHz Main + WLAN 5GHz Aux
- WWAN Main (Ant5) + WWAN Aux (Ant8) + WLAN 5GHz Main + WLAN 5GHz Aux + BT Aux
- WWAN Main (Ant5) + WWAN Aux (Ant8) + WLAN 6GHz Main + BT Aux
- WWAN Main (Ant5) + WWAN Aux (Ant8) + WLAN 6GHz Main + WLAN 6GHz Aux
- WWAN Main (Ant5) + WWAN Aux (Ant8) + WLAN 6GHz Main + WLAN 6GHz Aux + BT Aux

WLAN transmitter is considered in this report just for the simultaneous transmission evaluation with the WWAN module (See section B.5.6)

Additional information

- 5.60-5.65 GHz band (TDWR) is supported by the device
- Band gap is supported by the device
- Two power settings are implemented in the DUT:
 - Max power for Notebook mode and reduced power Tablet mode
- Maximum Power Reduction (MPR) is implemented according to 3GPP, built-in by design on the tune-up power:

Modulation	Channel bandwidth / #RB						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≥ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

The DUT uses the maximum MPR values described in the above tables.

The maximum power reduction is applicable on the tune up tolerance.

- According to 3GPP 38-101-1, the UE is allowed to reduce the maximum output power due to higher order modulations and for channel bandwidths that meets both following criteria:
- Channel bandwidth ≤ 100MHz.
- Relative channel bandwidth ≤ 4% for TDD bands and ≤ 3% for FDD bands

Maximum power reduction (MPR) for power class 3			
Modulation	MPR (Db)		
	Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM PI/2 BPSK	≤ 3.5 ¹	≤ 1.2 ¹	≤ 0.2 ¹
	0.5 ²	0.5 ²	0 ²
DFT-s-OFDM QPSK	≤ 1		0
DFT-s-OFDM 16 QAM	≤ 2		≤ 1
DFT-s-OFDM 64 QAM	≤ 2.5		
DFT-s-OFDM 256 QAM	4.5		
CP-OFDM QPSK	≤ 3		≤ 1.5
CP-OFDM 16 QAM	≤ 3		≤ 2
CP-OFDM 64 QAM	≤ 3.5		
CP-OFDM 256 QAM	≤ 6.5		

NOTE 1: Applicable for UE operating in TDD mode with PI/2 BPSK modulation and if the IE [P-Boost-BPSK] is set to 1 and 40% or less slots in radio frame are used for UL transmission for bands n40, n77, n78 and n79.
 NOTE 2: Applicable for UE operating in FDD mode, or in TDD mode in bands other than n40, n77, n78 and n79 and if the IE [Pboost-BPSK] is set to 0 and if more than 40% of slots in radio frame are used for UL transmission for bands n40, n77, n78 and n79.

Maximum power reduction (MPR) for power class 2			
Modulation	MPR (dB)		
	Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM PI/2 BPSK	≤ 3.5	≤ 0.5	0
DFT-s-OFDM QPSK	≤ 3.5	≤ 1	0
DFT-s-OFDM 16 QAM	≤ 3.5	≤ 2	≤ 1
DFT-s-OFDM 64 QAM	≤ 3.5	≤ 2.5	
DFT-s-OFDM 256 QAM	≤ 4.5		
CP-OFDM QPSK	≤ 3.5	≤ 3	≤ 1.5
CP-OFDM 16 QAM	≤ 3.5	≤ 3	≤ 2
CP-OFDM 64 QAM	≤ 3.5		
CP-OFDM 256 QAM	≤ 6.5		

The DUT uses the maximum MPR values described in the above tables.

The maximum power reduction is applicable on the tune up tolerance.

The following tables indicates the power levels and tolerance for laptop & tablet modes:

Maximum Output power specification + Tune up tolerance

Mode	Tx Ant	Technology	Bands	Class	Nominal (dBm)	Tolerance dB	Lower Tolerance (dBm)	Upper Tolerance (dBm)
Laptop	Ant 5	WCDMA/HSPA	FDD II (1850.0 – 1910.0 MHz)	3	20.0	±1	19.0	21.0
		WCDMA/HSPA	FDD IV (1710.0 – 1755.0 MHz)	3	20.5	±1	19.5	21.5
		WCDMA/HSPA	FDD V (824.0 – 849.0 MHz)	3	24.0	±1	23.0	25.0
		LTE	B2 (1850.0 – 1910.0 MHz)	3	20.0	±1	19.0	21.0
		LTE	B4 (1710.0 – 1755.0 MHz)	3	20.5	±1	19.5	21.5
		LTE	B5 (824.0 – 849.0 MHz)	3	24.0	±1	23.0	25.0
		LTE	B7 (2500.0 – 2570.0 MHz)	3	20.0	±1	19.0	21.0
		LTE	B12 (699.0 – 716.0 MHz)	3	24.0	±1	23.0	25.0
		LTE	B13 (777.0 – 787.0 MHz)	3	24.0	±1	23.0	25.0
		LTE	B14 (788.0 – 798.0 MHz)	3	24.0	±1	23.0	25.0
		LTE	B17 (704.0 – 716.0 MHz)	3	24.0	±1	23.0	25.0
		LTE	B25 (1850.0 – 1915.0 MHz)	3	20.0	±1	19.0	21.0
		LTE	B26 (814.0 – 849.0 MHz)	3	24.0	±1	23.0	25.0
		LTE	B30 (2305.0 – 2315.0 MHz)	3	21.5	±1	20.5	22.5
		LTE	B38 (2570.0 – 2620.0 MHz)	3	22.5	±1	21.5	23.5
	LTE	B41 (2496.0 – 2690.0 MHz)	3	20.0	±1	19.0	21.0	
	LTE	B41-HPUE (2496.0 – 2690.0 MHz)	2	20.0	±1	19.0	21.0	
	LTE	B66 (1710.0 – 1780.0 MHz)	3	20.5	±1	19.5	21.5	
	LTE	B71 (663.0 – 698.0 MHz)	3	22.0	±1	21.0	23.0	
	LTE	B2 (1850.0 – 1910.0 MHz)	3	15.5	±1	14.5	16.5	
	LTE	B4 (1710.0 – 1755.0 MHz)	3	16.0	±1	15.0	17.0	
	LTE	B7 (2500.0 – 2570.0 MHz)	3	16.5	±1	15.5	17.5	
	LTE	B25 (1850.0 – 1915.0 MHz)	3	15.5	±1	14.5	16.5	
	LTE	B30 (2305.0 – 2315.0 MHz)	3	17.0	±1	16.0	18.0	
	LTE	B41 (2496.0 – 2690.0 MHz)	3	16.0	±1	15.0	17.0	
	LTE	B41-HPUE(2496.0 – 2690.0 MHz)	2	16.0	±1	15.0	17.0	
	LTE	B48 (3550.0 – 3700.0 MHz)	3	14.5	±1	13.5	15.5	
	LTE	B66 (1710.0 – 1780.0 MHz)	3	16.5	±1	15.5	17.5	
	5G NR	N2 (1850.0 – 1910.0 MHz)	3	20.0	±1	19.0	21.0	
	5G NR	N5 (824.0 – 849.0 MHz)	3	24.0	±1	23.0	25.0	
	5G NR	N7 (2500.0 – 2570.0 MHz)	3	20.0	±1	19.0	21.0	
	5G NR	N25 (1850.0 – 1915.0 MHz)	3	20.0	±1	19.0	21.0	
	5G NR	N30 (2305.0 – 2315.0 MHz)	3	21.5	±1	20.5	22.5	
	5G NR	N38 (2570.0 – 2620.0 MHz)	3	22.5	±1	21.5	23.5	
	5G NR	N41 (2496.0 – 2690.0 MHz)	3	20.0	±1	19.0	21.0	
	5G NR	N41-HPUE(2496.0 – 2690.0 MHz)	2	20.0	±1	19.0	21.0	
	5G NR	N66 (1710.0 – 1780.0 MHz)	3	20.5	±1	19.5	21.5	
	5G NR	N71 (663.0 – 698.0 MHz)	3	22.0	±1	21.0	23.0	
	5G NR	N77 (3700.0 – 3980.0 MHz)	3	14.0	±1	13.0	15.0	
	5G NR	N77-HPUE(3700.0 – 3980.0 MHz)	2	14.0	±1	13.0	15.0	
	5G NR	N78 (3700.0 – 3800.0 MHz)	3	16.0	±1	15.0	17.0	
	5G NR	N78-HPUE(3700.0 – 3800.0 MHz)	3	16.0	±1	15.0	17.0	
	5G NR	N2 (1850.0 – 1910.0 MHz)	3	15.5	±1	14.5	16.5	
	5G NR	N41 (2496.0 – 2690.0 MHz)	3	16.0	±1	15.0	17.0	
	5G NR	N41-HPUE(2496.0 – 2690.0 MHz)	2	16.0	±1	15.0	17.0	
	5G NR	N66 (1710.0 – 1780.0 MHz)	3	16.5	±1	15.5	17.5	
	5G NR	N77 (3700.0 – 3980.0 MHz)	3	13.5	±1	12.5	14.5	
5G NR	N77-HPUE(3700.0 – 3980.0 MHz)	2	13.5	±1	12.5	14.5		
5G NR	N78 (3700.0 – 3800.0 MHz)	3	14.0	±1	13.0	15.0		
5G NR	N78-HPUE(3700.0 – 3800.0 MHz)	3	14.0	±1	13.0	15.0		
	Ant 8	5G NR	N2 (1850.0 – 1910.0 MHz)	3	15.5	±1	14.5	16.5
5G NR		N41 (2496.0 – 2690.0 MHz)	3	16.0	±1	15.0	17.0	
5G NR		N41-HPUE(2496.0 – 2690.0 MHz)	2	16.0	±1	15.0	17.0	
5G NR		N66 (1710.0 – 1780.0 MHz)	3	16.5	±1	15.5	17.5	
5G NR		N77 (3700.0 – 3980.0 MHz)	3	13.5	±1	12.5	14.5	
5G NR		N77-HPUE(3700.0 – 3980.0 MHz)	2	13.5	±1	12.5	14.5	
5G NR		N78 (3700.0 – 3800.0 MHz)	3	14.0	±1	13.0	15.0	

Mode	Tx Ant	Technology	Bands	Class	Nominal (dBm)	Tolerance dB	Lower Tolerance (dBm)	Upper Tolerance (dBm)
Tablet	Ant 5	WCDMA/HSPA	FDD II (1850.0 – 1910.0 MHz)	3	17.5	±1	16.5	18.5
		WCDMA/HSPA	FDD IV (1710.0 – 1755.0 MHz)	3	16.5	±1	15.5	17.5
		WCDMA/HSPA	FDD V (824.0 – 849.0 MHz)	3	22.5	±1	21.5	23.5
		LTE	B2 (1850.0 – 1910.0 MHz)	3	17.5	±1	16.5	18.5
		LTE	B4 (1710.0 – 1755.0 MHz)	3	16.5	±1	15.5	17.5
		LTE	B5 (824.0 – 849.0 MHz)	3	23.5	±1	22.5	24.5
		LTE	B7 (2500.0 – 2570.0 MHz)	3	15.0	±1	14.0	16.0
		LTE	B12 (699.0 – 716.0 MHz)	3	19.5	±1	18.5	20.5
		LTE	B13 (777.0 – 787.0 MHz)	3	22.0	±1	21.0	23.0
		LTE	B14 (788.0 – 798.0 MHz)	3	22.0	±1	21.0	23.0
		LTE	B17 (704.0 – 716.0 MHz)	3	20.5	±1	19.5	21.5
		LTE	B25 (1850.0 – 1915.0 MHz)	3	17.5	±1	16.5	18.5
		LTE	B26 (814.0 – 849.0 MHz)	3	23.0	±1	22.0	24.0
		LTE	B30 (2305.0 – 2315.0 MHz)	3	14.5	±1	13.5	15.5
		LTE	B38 (2570.0 – 2620.0 MHz)	3	19.5	±1	18.5	20.5
		LTE	B41 (2496.0 – 2690.0 MHz)	3	15.0	±1	14.0	16.0
		LTE	B41-HPUE (2496.0 – 2690.0 MHz)	2	15.0	±1	14.0	16.0
		LTE	B66 (1710.0 – 1780.0 MHz)	3	17.0	±1	16.0	18.0
	LTE	B71 (663.0 – 698.0 MHz)	3	22.0	±1	21.0	23.0	
	LTE	B2 (1850.0 – 1910.0 MHz)	3	13.5	±1	12.5	14.5	
	Ant 8	LTE	B4 (1710.0 – 1755.0 MHz)	3	14.5	±1	13.5	15.5
		LTE	B7 (2500.0 – 2570.0 MHz)	3	16.5	±1	15.5	17.5
		LTE	B25 (1850.0 – 1915.0 MHz)	3	13.5	±1	12.5	14.5
		LTE	B30 (2305.0 – 2315.0 MHz)	3	16.0	±1	15.0	17.0
		LTE	B41 (2496.0 – 2690.0 MHz)	3	16.5	±1	15.5	17.5
		LTE	B41-HPUE(2496.0 – 2690.0 MHz)	2	16.5	±1	15.5	17.5
		LTE	B48 (3550.0 – 3700.0 MHz)	3	13.0	±1	12.0	14.0
		LTE	B66 (1710.0 – 1780.0 MHz)	3	15.0	±1	14.0	16.0
	Ant 5	5G NR	N2 (1850.0 – 1910.0 MHz)	3	17.5	±1	16.5	18.5
		5G NR	N5 (824.0 – 849.0 MHz)	3	23.5	±1	22.5	24.5
		5G NR	N7 (2500.0 – 2570.0 MHz)	3	15.0	±1	14.0	16.0
		5G NR	N25 (1850.0 – 1915.0 MHz)	3	17.5	±1	16.5	18.5
		5G NR	N30 (2305.0 – 2315.0 MHz)	3	14.5	±1	13.5	15.5
		5G NR	N38 (2570.0 – 2620.0 MHz)	3	19.5	±1	18.5	20.5
		5G NR	N41 (2496.0 – 2690.0 MHz)	3	15.0	±1	14.0	16.0
		5G NR	N41-HPUE(2496.0 – 2690.0 MHz)	2	15.0	±1	14.0	16.0
		5G NR	N66 (1710.0 – 1780.0 MHz)	3	17.0	±1	16.0	18.0
		5G NR	N71 (663.0 – 698.0 MHz)	3	22.0	±1	21.0	23.0
		5G NR	N77 (3700.0 – 3980.0 MHz)	3	13.0	±1	12.0	14.0
		5G NR	N77-HPUE(3700.0 – 3980.0 MHz)	2	13.0	±1	12.0	14.0
		5G NR	N78 (3700.0 – 3800.0 MHz)	3	13.0	±1	12.0	14.0
		5G NR	N78-HPUE(3700.0 – 3800.0 MHz)	3	13.0	±1	12.0	14.0
Ant 8	5G NR	N2 (1850.0 – 1910.0 MHz)	3	13.5	±1	12.5	14.5	
	5G NR	N41 (2496.0 – 2690.0 MHz)	3	16.5	±1	15.5	17.5	
	5G NR	N41-HPUE(2496.0 – 2690.0 MHz)	2	16.5	±1	15.5	17.5	
	5G NR	N66 (1710.0 – 1780.0 MHz)	3	15.0	±1	14.0	16.0	
	5G NR	N77 (3700.0 – 3980.0 MHz)	3	13.0	±1	12.0	14.0	
	5G NR	N77-HPUE(3700.0 – 3980.0 MHz)	2	13.0	±1	12.0	14.0	
	5G NR	N78 (3700.0 – 3800.0 MHz)	3	13.5	±1	12.5	14.5	
5G NR	N78-HPUE(3700.0 – 3800.0 MHz)	2	13.5	±1	12.5	14.5		

As mentioned in Section 3, the SAR compliance testing is performed at upper-threshold values of the algorithm, which is the maximum output power level for continuous time-averaging operations TAS algorithm enforces.

In TAS operation, the control parameters including the upper-threshold value are stored in NVM. They are inaccessible to the normal users and no other interface is available for changing these control parameters.

The table below shows the upper-threshold values used as continuous power for SAR testing as well as the different TAS parameters defined in [1] and [2] of section 3, to be embedded in the host:

Mode	Tx Ant.	Technology	Bands	Class	Nominal Full Power (dBm)	Upper Threshold (dBm)	Lower Threshold (dBm)	DPR_ON Power (dBm)
Laptop	Ant 5	WCDMA/HSPA	FDD II (1850.0 – 1910.0 MHz)	3	23.5	20.0	19.0	18.0
		WCDMA/HSPA	FDD IV (1710.0 – 1755.0 MHz)	3	23.5	20.5	19.5	18.5
		WCDMA/HSPA	FDD V (824.0 – 849.0 MHz)	3	23.5	24.0	23.0	22.0
		LTE	B2 (1850.0 – 1910.0 MHz)	3	23.0	20.0	19.0	18.0
		LTE	B4 (1710.0 – 1755.0 MHz)	3	23.0	20.5	19.5	18.5
		LTE	B5 (824.0 – 849.0 MHz)	3	23.0	24.0	23.0	22.0
		LTE	B7 (2500.0 – 2570.0 MHz)	3	23.0	20.0	19.0	18.0
		LTE	B12 (699.0 – 716.0 MHz)	3	23.0	24.0	23.0	22.0
		LTE	B13 (777.0 – 787.0 MHz)	3	23.0	24.0	23.0	22.0
		LTE	B14 (788.0 – 798.0 MHz)	3	23.0	24.0	23.0	22.0
		LTE	B17 (704.0 – 716.0 MHz)	3	23.0	24.0	23.0	22.0
		LTE	B25 (1850.0 – 1915.0 MHz)	3	23.0	20.0	19.0	18.0
		LTE	B26 (814.0 – 849.0 MHz)	3	23.0	24.0	23.0	22.0
		LTE	B30 (2305.0 – 2315.0 MHz)	3	22.0	21.5	20.5	19.5
		LTE	B38 (2570.0 – 2620.0 MHz)	3	23.0	22.5	21.5	20.5
		LTE	B41 (2496.0 – 2690.0 MHz)	3	23.0	20.0	19.0	18.0
		LTE	B41-HPUE(2496.0 – 2690.0 MHz)	2	26.0	20.0	19.0	18.0
	LTE	B66 (1710.0 – 1780.0 MHz)	3	23.0	20.0	19.0	18.0	
	LTE	B71 (663.0 – 698.0 MHz)	3	23.0	22.0	21.0	20.0	
	Ant 8	LTE	B2 (1850.0 – 1910.0 MHz)	3	23.0	15.5	14.5	13.5
		LTE	B4 (1710.0 – 1755.0 MHz)	3	23.0	16.0	15.0	14.0
		LTE	B7 (2500.0 – 2570.0 MHz)	3	23.0	16.5	15.5	14.5
		LTE	B25 (1850.0 – 1915.0 MHz)	3	23.0	15.5	14.5	13.5
		LTE	B30 (2305.0 – 2315.0 MHz)	3	22.0	17.0	16.0	15.0
		LTE	B41 (2496.0 – 2690.0 MHz)	3	23.0	16.0	15.0	14.0
		LTE	B41-HPUE(2496.0 – 2690.0 MHz)	2	26.0	16.0	15.0	14.0
		LTE	B48 (3550.0 – 3700.0 MHz)	3	21.0	14.5	13.5	12.5
	LTE	B66 (1710.0 – 1780.0 MHz)	3	23.0	16.5	15.5	14.5	
	Ant 5	5G NR	N2 (1850.0 – 1910.0 MHz)	3	23.0	20.0	19.0	18.0
		5G NR	N5 (824.0 – 849.0 MHz)	3	23.0	24.0	23.0	22.0
		5G NR	N7 (2500.0 – 2570.0 MHz)	3	23.0	20.0	19.0	18.0
		5G NR	N25 (1850.0 – 1915.0 MHz)	3	23.0	20.0	19.0	18.0
		5G NR	N30 (2305.0 – 2315.0 MHz)	3	22.0	21.5	20.5	19.5
		5G NR	N38 (2570.0 – 2620.0 MHz)	3	23.0	22.5	21.5	20.5
		5G NR	N41 (2496.0 – 2690.0 MHz)	3	23.0	20.0	19.0	18.0
		5G NR	N41-HPUE(2496.0 – 2690.0 MHz)	2	26.0	20.0	19.0	18.0
		5G NR	N66 (1710.0 – 1780.0 MHz)	3	23.0	20.5	19.5	18.5
		5G NR	N71 (663.0 – 698.0 MHz)	3	23.0	22.0	21.0	20.0
		5G NR	N77 (3700.0 – 3980.0 MHz)	3	23.0	14.0	13.0	12.0
		5G NR	N77-HPUE(3700.0 – 3980.0 MHz)	2	25.0	14.0	13.0	12.0
		5G NR	N78 (3700.0 – 3800.0 MHz)	3	23.0	16.0	15.0	14.0
	5G NR	N78-HPUE(3700.0 – 3800.0 MHz)	3	26.0	16.0	15.0	14.0	
Ant 8	5G NR	N2 (1850.0 – 1910.0 MHz)	3	23.0	15.5	14.5	13.5	
	5G NR	N41 (2496.0 – 2690.0 MHz)	3	23.0	16.0	15.0	14.0	
	5G NR	N41-HPUE(2496.0 – 2690.0 MHz)	2	26.0	16.0	15.0	14.0	
	5G NR	N66 (1710.0 – 1780.0 MHz)	3	23.0	16.5	15.5	14.5	
	5G NR	N77 (3700.0 – 3980.0 MHz)	3	23.0	13.5	12.5	11.5	
	5G NR	N77-HPUE(3700.0 – 3980.0 MHz)	2	26.0	13.5	12.5	11.5	
	5G NR	N78 (3700.0 – 3800.0 MHz)	3	23.0	14.0	13.0	12.0	
5G NR	N78-HPUE(3700.0 – 3800.0 MHz)	2	26.0	14.0	13.0	12.0		

Mode	Tx Ant.	Technology	Bands	Class	Nominal Full Power (dBm)	Upper Threshold (dBm)	Lower Threshold (dBm)	DPR_ON Power (dBm)
Tablet	Ant 5	WCDMA/HSPA	FDD II (1850.0 – 1910.0 MHz)	3	23.5	17.5	16.5	15.5
		WCDMA/HSPA	FDD IV (1710.0 – 1755.0 MHz)	3	23.5	16.5	15.5	14.5
		WCDMA/HSPA	FDD V (824.0 – 849.0 MHz)	3	23.5	22.5	21.5	20.5
		LTE	B2 (1850.0 – 1910.0 MHz)	3	23.0	17.5	16.5	15.5
		LTE	B4 (1710.0 – 1755.0 MHz)	3	23.0	16.5	15.5	14.5
		LTE	B5 (824.0 – 849.0 MHz)	3	23.0	23.5	22.5	21.5
		LTE	B7 (2500.0 – 2570.0 MHz)	3	23.0	15.0	14.0	13.0
		LTE	B12 (699.0 – 716.0 MHz)	3	23.0	19.5	18.5	17.5
		LTE	B13 (777.0 – 787.0 MHz)	3	23.0	22.0	21.0	20.0
		LTE	B14 (788.0 – 798.0 MHz)	3	23.0	22.0	21.0	20.0
		LTE	B17 (704.0 – 716.0 MHz)	3	23.0	20.5	19.5	18.5
		LTE	B25 (1850.0 – 1915.0 MHz)	3	23.0	17.5	16.5	15.5
		LTE	B26 (814.0 – 849.0 MHz)	3	23.0	23.0	22.0	21.0
		LTE	B30 (2305.0 – 2315.0 MHz)	3	22.0	14.5	13.5	12.5
		LTE	B38 (2570.0 – 2620.0 MHz)	3	23.0	19.5	18.5	17.5
		LTE	B41 (2496.0 – 2690.0 MHz)	3	23.0	15.0	14.0	13.0
		LTE	B41-HPUE(2496.0 – 2690.0 MHz)	2	26.0	15.0	14.0	13.0
		LTE	B66 (1710.0 – 1780.0 MHz)	3	23.0	17.0	16.0	15.0
	LTE	B71 (663.0 – 698.0 MHz)	3	23.0	22.0	21.0	20.0	
	Ant 8	LTE	B2 (1850.0 – 1910.0 MHz)	3	23.0	13.5	12.5	11.5
		LTE	B4 (1710.0 – 1755.0 MHz)	3	23.0	14.5	13.5	12.5
		LTE	B7 (2500.0 – 2570.0 MHz)	3	23.0	16.5	15.5	14.5
		LTE	B25 (1850.0 – 1915.0 MHz)	3	23.0	13.5	12.5	11.5
		LTE	B30 (2305.0 – 2315.0 MHz)	3	22.0	16.0	15.0	14.0
		LTE	B41 (2496.0 – 2690.0 MHz)	3	23.0	16.5	15.5	14.5
		LTE	B41-HPUE(2496.0 – 2690.0 MHz)	2	26.0	16.5	15.5	14.5
		LTE	B48 (3550.0 – 3700.0 MHz)	3	21.0	13.0	12.0	11.0
	LTE	B66 (1710.0 – 1780.0 MHz)	3	23.0	15.0	14.0	13.0	
	Ant 5	5G NR	N2 (1850.0 – 1910.0 MHz)	3	23.0	17.5	16.5	15.5
		5G NR	N5 (824.0 – 849.0 MHz)	3	23.0	13.5	12.5	11.5
		5G NR	N7 (2500.0 – 2570.0 MHz)	3	23.0	15.0	14.0	13.0
		5G NR	N25 (1850.0 – 1915.0 MHz)	3	23.0	17.5	16.5	15.5
		5G NR	N30 (2305.0 – 2315.0 MHz)	3	22.0	14.5	13.5	12.5
		5G NR	N38 (2570.0 – 2620.0 MHz)	3	23.0	19.5	18.5	17.5
		5G NR	N41 (2496.0 – 2690.0 MHz)	3	23.0	15.0	14.0	13.0
		5G NR	N41-HPUE(2496.0 – 2690.0 MHz)	2	26.0	15.0	14.0	13.0
		5G NR	N66 (1710.0 – 1780.0 MHz)	3	23.0	17.0	16.0	15.0
		5G NR	N71 (663.0 – 698.0 MHz)	3	23.0	22.0	21.0	20.0
		5G NR	N77 (3700.0 – 3980.0 MHz)	3	23.0	13.0	12.0	11.0
		5G NR	N77-HPUE(3700.0 – 3980.0 MHz)	2	25.0	13.0	12.0	11.0
		5G NR	N78 (3700.0 – 3800.0 MHz)	3	23.0	13.0	12.0	11.0
		5G NR	N78-HPUE(3700.0 – 3800.0 MHz)	3	26.0	13.0	12.0	11.0
	Ant 8	5G NR	N2 (1850.0 – 1910.0 MHz)	3	23.0	13.5	12.5	11.5
		5G NR	N41 (2496.0 – 2690.0 MHz)	3	23.0	16.5	15.5	14.5
		5G NR	N41-HPUE(2496.0 – 2690.0 MHz)	2	26.0	16.5	15.5	14.5
5G NR		N66 (1710.0 – 1780.0 MHz)	3	23.0	15.0	14.0	13.0	
5G NR		N77 (3700.0 – 3980.0 MHz)	3	23.0	13.0	12.0	11.0	
5G NR		N77-HPUE(3700.0 – 3980.0 MHz)	2	26.0	13.0	12.0	11.0	
5G NR		N78 (3700.0 – 3800.0 MHz)	3	23.0	13.5	12.5	11.5	
5G NR	N78-HPUE(3700.0 – 3800.0 MHz)	2	26.0	13.5	12.5	11.5		

SAR compliance is demonstrated with the *Reported SAR: Reported SAR = measured 1gSAR @ Reported Upper Threshold < FCC SAR limit where, Reported Upper Threshold = Upper Threshold (stored in NVM) + Tolerance*

7. Remarks and comments

1. Only the plots for the test positions with the highest measured SAR per band/mode are included in Annex C as required per FCC OET KDB 865664 D02, paragraph 2.3.h.
2. Maximum transmission power on modulations 64QAM and 256QAM for LTE and 5G NR, are lower than other QPSK and 16QAM modulations. Therefore, higher power modulations were chosen to perform all tests shown in this test report.
3. The same conducted power measurements were used on both samples since the same WWAN module has been used on the samples under test during SAR measurements.

8. Test Verdicts summary

The statement of conformity to applicable standards in the table below are based on the measured values, without taking into account the measurement uncertainties.

Mode	Band (UL)	Highest Reported SAR (1g) (W/kg)	Verdict
WCDMA	FDD II (1850.0 – 1910.0 MHz)	1.06	P
	FDD IV (1710.0 – 1755.0 MHz)	0.79	P
	FDD V (824.0 – 849.0 MHz)	0.29	P
LTE FDD	Band 2 (1850.0 – 1910.0 MHz)	NM	NA
	Band 4 (1710.0 – 1755.0 MHz)	NM	NA
	Band 5 (824.0 – 849.0 MHz)	0.40	P
	Band 7 (2500.0 – 2570.0 MHz)	1.14	P
	Band 12 (699.0 – 716.0 MHz)	0.79	P
	Band 13 (777.0 – 787.0 MHz)	0.63	P
	Band 14 (788.0 – 798.0 MHz)	0.62	P
	Band 17 (704.0 – 716.0 MHz)	0.98	P
	Band 25 (1850.0 – 1915.0 MHz)	1.31	P
	Band 26 (814.0 – 849.0 MHz)	0.53	P
	Band 30 (2305.0 – 2315.0 MHz)	1.14	P
	Band 66 (1710.0 – 1780.0 MHz)	1.13	P
	Band71 (663.0 – 698.0 MHz)	0.78	P
	LTE TDD	Band 38 (2570.0 – 2620.0 MHz)	1.12
Band 41 (2496.0 – 2690.0 MHz)		0.59	P
Band 48 (3550.0 – 3700.0 MHz)		0.72	P
5G NR FR1 FDD	Band 2 (1850.0 – 1910.0 MHz)	1.08	P
	Band 5 (824.0 – 849.0 MHz)	0.88	P
	Band 7 (2500.0 – 2570.0 MHz)	0.56	P
	Band 25 (1850.0 – 1915.0 MHz)	0.75	P
	Band 30 (2305.0 – 2315.0 MHz)	0.84	P
	Band 66 (1710.0 – 1780.0 MHz)	1.07	P
	Band71 (663.0 – 698.0 MHz)	0.98	P
5G NR FR1 TDD	Band 38 (2570.0 – 2620.0 MHz)	0.84	P
	Band 41 (2496.0 – 2690.0 MHz)	0.83	P
	Band 77 (3700.0 – 3980.0 MHz)	1.06	P
	Band 78 (3700.0 – 3800.0 MHz)	0.71	P

P: Pass
 F: Fail
 NM: Not Measured
 NA: Not Applicable

According to the FCC OET KDB 690783 D01, this is the summary of the values for the Grant Listing:

Exposure Condition	Highest Reported SAR (1g) (W/kg)			
	Equipment Class			
	PCE	DTS	DSS	U-NII
Body Worn	1.31	1.18	0.18	1.20
Simultaneous Tx	Sum-SAR: 4.48 SPLSR: 0.04	Sum-SAR: 3.50 SPLSR: 0.03	Sum-SAR: 4.48 SPLSR: 0.04	Sum-SAR: 4.48 SPLSR: 0.04

Considering the results of the performed test according to FCC 47CFR Part 2.1093 the item under test is IN COMPLIANCE with the requested specifications specified in Section1. Standards, reference documents and applicable test methods

9. Document Revision History

Revision #	Modified by	Revision Details
Rev. 00	E. Garcia	First Issue
Rev. 01	E. Garcia	Typo's corrections
Rev. 02	E. Garcia	Typo's corrections and removed NR38 Ant8

Annex A. Test & System Description

A.1 SAR Definition

Specific Absorption rate is defined as the time derivative of the incremental energy (dW) absorbed by (dissipated in) and incremental mass (dm) contained in a volume element (dV) of a given density (ρ).

$$SAR = \frac{d}{dt} \cdot \left(\frac{dW}{dm} \right) = \frac{d}{dt} \cdot \left(\frac{dW}{\rho \cdot dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$


Where:

σ = Conductivity of the tissue (S/m)
 ρ = Mass density of the tissue (kg/m³)
E = RMS electric field strength (V/m)

A.2 SAR Measurement System

A.2.1 SAR Measurement Setup

The DASY6 system for performing compliance tests consists of the following items:

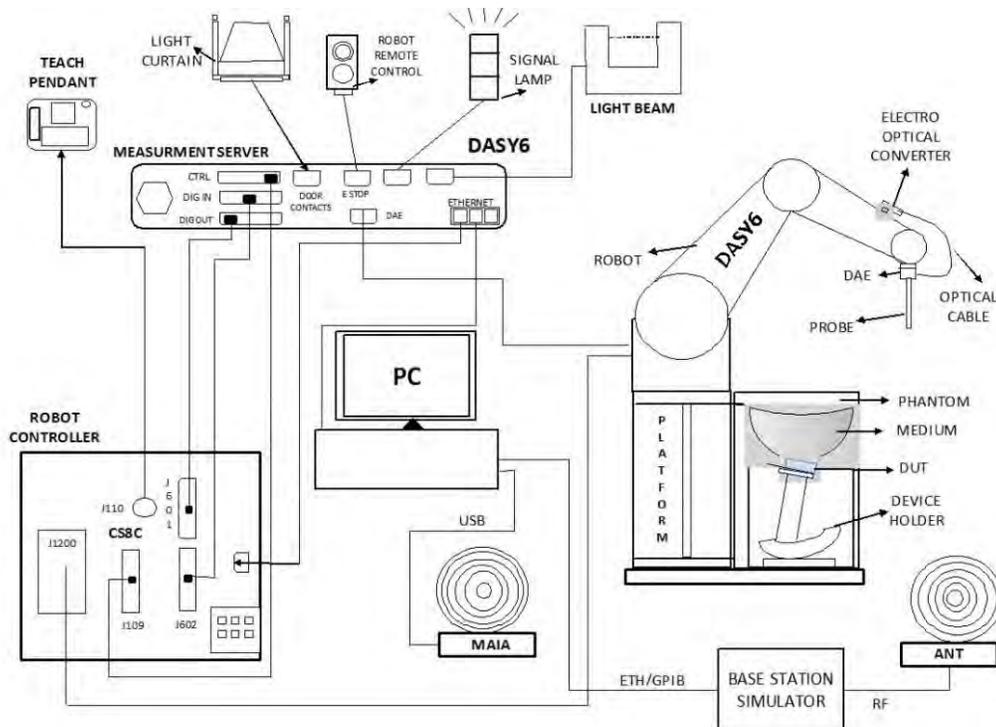

- ✓ A standard high precision 6-axis robot (Stäubli TX/RX family) with controller, teach pendant and software. It includes an arm extension for accommodating the data acquisition electronics (DAE)
- ✓ An isotropic field probe optimized and calibrated for the targeted measurements.
- ✓ A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- ✓ The Electro-optical Converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. The EOC signal is transmitted to the measurement server.
- ✓ The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movements interrupts.
- ✓ The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- ✓ A computer running Win7 professional operating system and the DASY6 software.
- ✓ Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- ✓ The phantom, the device holder and other accessories according to the targeted measurement.
- ✓ MAIA is a hardware interface (Antenna) used to evaluate the modulation and audio interference characteristics of RF signals.
- ✓ ANT is an ultra-wideband antenna for use with the base station simulators over 698 MHz to 6GHz.
- ✓ The base station simulator is an equipment used for SAR cellular tests in order to emulate the cellular signals characteristics and behavior between a regular base station and the equipment under test.
- ✓ Tissue simulating liquid.
- ✓ System Validation dipoles.
- ✓ Network emulator.

A.2.2 E-Field Measurement Probe

The probe is constructed using three orthogonal dipole sensors arranged on an interlocking, triangular prism core. The probe has built-in shielding against static charges and is contained within a PEEK cylindrical enclosure material at the tip.



The probe's characteristics are:


Frequency Range	30MHz – 6GHz
Length	337 mm
Probe tip external diameter	2.5 mm
Typical distance between dipoles and the probe tip	1 mm
Axial Isotropy (in human-equivalent liquids)	±0.3 dB
Hemispherical Isotropy (in human-equivalent liquids)	±0.5 dB
Linearity	±0.2 dB
Maximum operating SAR	100 W/kg
Lower SAR detection threshold	0.001 W/kg

A.2.3 Flat Phantom

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

The phantom's characteristics are:

Material	Vinylester, glass fiber reinforced (VE-GF)
Shell thickness	2 mm ± 0.2 mm
Filling volume	30 Liters approx.
Dimensions	Major axis: 600mm / Minor axis: 400mm

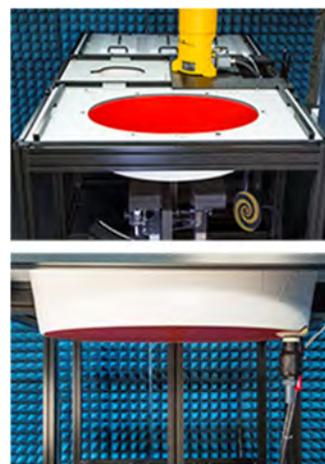

A.2.4 Device Positioner

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of 0.5 mm would produce a SAR uncertainty of 20%. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.



The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

A simple but effective and easy-to-use extension for the Mounting Device; facilitates testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.); lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI and other Flat Phantoms.



A.3 Data Evaluation

- **Power Reference measurement**

The robot measures the E field in a specified reference position that can be either the selected section's grid reference point or a user point in this section at 4mm of the inner surface of the phantom, 2mm for frequencies above 3GHz.

- **Area Scan**

Measurement procedures for evaluating SAR from wireless handsets typically start with a coarse measurement grid to determine the approximate location of the local peak SAR values. This is known as the area-scan procedure. The SAR distribution is scanned along the inside surface of one side of the phantom head, at least for an area larger than the projection of the handset and antenna. The distance between the measured points and phantom surface should be less than 8 mm, and should remain constant (with variation less than ± 1 mm) during the entire scan in order to determine the locations of the local peak SAR with sufficient accuracy. The angle between the probe axis and the surface normal line is recommended but not required to be less than 30° . If this angle is larger than 30° and the closest point on the probe-tip housing to the phantom surface is closer than a probe diameter, the boundary effect may become larger and polarization dependent. This additional uncertainty needs to be analyzed and accounted for. To achieve this, modified test procedures and additional uncertainty analyses not described in this recommended practice may be required. The measurement and interpolation point spacing should be chosen such as to allow identification of the local peak locations to within one-half of the linear dimension of a side of the zoom-scan volume. Because a local peak having specific amplitude and steep gradients may produce a lower peak spatial-average SAR compared to peaks with slightly lower amplitude and less steep gradients, it is necessary to evaluate these other peaks as well. However, since the spatial gradients of local SAR peaks are a function of the wavelength inside the tissue-equivalent liquid and the incident magnetic field strength, it is not necessary to evaluate local peaks that are less than 2 dB or more below the global maximum peak. Two-dimensional spline algorithms (Brishoual et al. 2001; Press et al., 1996) are typically used to determine the peaks and gradients within the scanned area. If a peak is found at a distance from the scan border of less than one-half the edge dimension of the desired 1 g or 10 g cube, the measurement area should be enlarged if possible.

- **Zoom Scan**

To evaluate the peak spatial-average SAR values for 1 g or 10 g cubes, fine resolution volume scans, called zoom scans, are performed at the peak SAR locations identified during the area scan. The minimum zoom scan volume size should extend at least 1.5 times the edge dimension of a 1 g cube in all directions from the center of the scan volume, for both 1 g and 10 g peak spatial-average SAR evaluations. Along the phantom curved surfaces, the front face of the volume facing the tissue/liquid interface conforms to the curved boundary, to ensure that all SAR peaks are captured. The back face should be equally distorted to maintain the correct averaging mass. The flatness and orientation of the four side faces are unchanged from that of a cube whose orientation is within $\pm 30^\circ$ of the line normal to the phantom at the center of the cube face next to the phantom surface. The peak local SAR locations that were determined in the area scan (interpolated values) should be used for the centers of the zoom scans. If a scan volume cannot be centered due to proximity of a phantom shape feature, the probe should be tilted to allow scan volume enlargement. If probe tilt is not feasible, the zoom-scan origin may be shifted, but not by more than half of the 1 g or 10 g cube edge dimension.

After the zoom-scan measurement, extrapolations from the closest measured points to the surface, for example along lines parallel to the zoom-scan centerline, and interpolations to a finer resolution between all measured and extrapolated points are performed. Extrapolation algorithm considerations are described in 6.5.3, and 3-D spline methods (Brishoual et al., 2001; Kreyszig, 1983; Press et al., 1996) can be used for interpolation. The peak spatial-average SAR is finally determined by a numerical averaging of the local SAR values in the interpolation grid, using for example a trapezoidal algorithm for the integration (averaging).

In some areas of the phantom, such as the jaw and upper head regions, the angle of the probe with respect to the line normal to the surface may be relatively large, e.g., greater than $\pm 30^\circ$, which could increase the boundary effect error to a larger level. In these cases, during the zoom scan a change in the orientation of the probe, the phantom, or both is recommended but not required for the duration of the zoom scan, so that the angle between the probe axis and the line normal to the surface is within 30° for all measurement points.

- **Power Drift measurement**

The robot re-measures the E-Field in the same reference location measured at the Power Reference. The drift measurement gives the field difference in dB from the first to the last reference reading. This allows a user to monitor the power drift of the device under test that must remain within a maximum variation of $\pm 5\%$.

- **Post-processing**

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE1528 and IEC 62209-1/2 standards. It can be conducted for 1g and 10g.

The software allows evaluations that combine measured data and robot positions, such as:

- ✓ Maximum search
- ✓ Extrapolation
- ✓ Boundary correction
- ✓ Peak search for averaged SAR

Interpolation between the measured points is performed when the resolution of the grid is not fine enough to compute the average SAR over a given mass.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation.


A.4 System and Liquid Check

A.4.1 System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results.

The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

In the simplified setup for system check, the EUT is replaced by a calibrated dipole and the power source is replaced by a controlled continuous wave generated by a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the phantom at the correct distance.

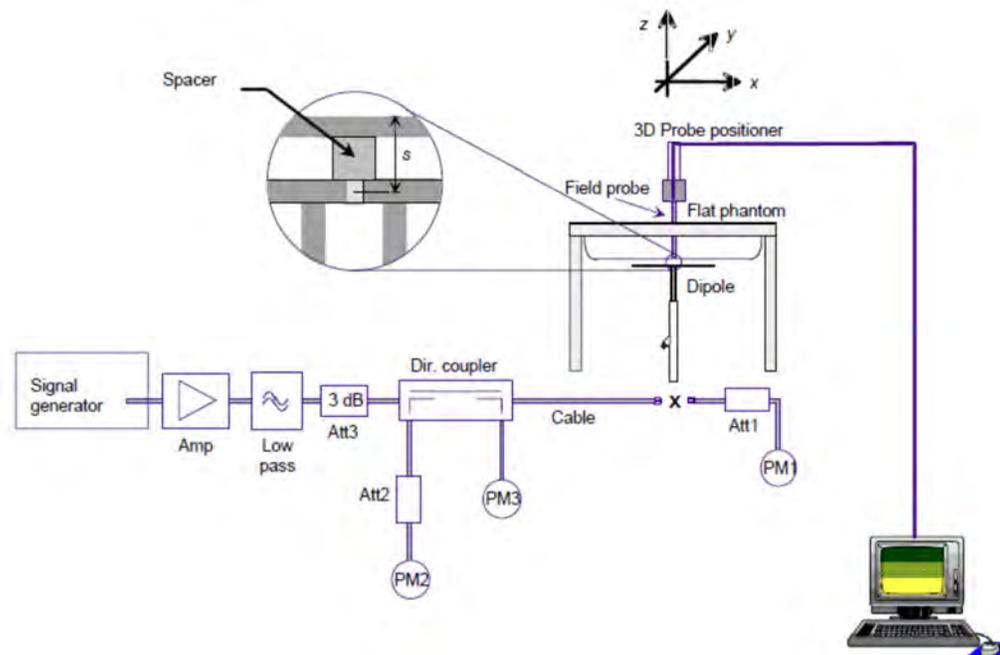

The equipment setup is shown below:

- ✓ Signal Generator
- ✓ Amplifier
- ✓ Directional coupler
- ✓ Power meter
- ✓ Calibrated dipole

First, the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the connector (x) to the system check source. The signal generator is adjusted for the desired forward power at the connector as read by power meter PM1 after attenuation Att1 and also as coupled through Att2 to PM2. After connecting the cable to the source, the signal generator is readjusted for the same reading at power meter PM2.

SAR results are normalized to a forward power of 1W to compare the values with the calibration reports results as described at IEEE 1528 and IEC 62209 standards.

A.4.2 Liquid Check

The dielectric parameters check is done prior to the use of the tissue simulating liquid. The verification is made by comparing the relative permittivity and conductivity to the values recommended by the applicable standards.

The liquid verification was performed using the following test setup:

- ✓ VNA (Vector Network Analyzer)
- ✓ Open-Short-Load calibration kit
- ✓ RF Cable
- ✓ Open-Ended Coaxial probe
- ✓ DAK software tool
- ✓ SAR Liquid
- ✓ De-ionized water
- ✓ Thermometer

These are the target dielectric properties of the tissue-equivalent liquid material as defined in FCC OET KDB 865664 D01.

Frequency (MHz)	Body SAR	
	ϵ_r (F/m)	σ (S/m)
150	61.9	0.80
300	58.2	0.92
450	56.7	0.94
835	55.2	0.97
900	55.0	1.05
1450	54.0	1.30
1800-2000	53.3	1.52
2450	52.7	1.95
3000	52.0	2.73
5800	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and ρ = 1000 kg/m³)

The measurement system implement a SAR error compensation algorithm as documented in IEEE Std 1528-2013 (equivalent to draft standard IEEE P1528-2011) to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters (applied to only scale up the measured SAR, and not downward) so, according to FCC OET KDB 865664 D01, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$.

A.5 Test Equipment List

A.5.1 SAR System #2*

ID #	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
001-017	Data Acquisition Electronics	DAE4	1703	SPEAG	2022-04-28	2023-04-28
002-000	6-axis Robot	TX60 L	F16/55FXA1/A/01	STAÜBLI	NA	NA
002-001	Robot Controller	CS8C	F16/55FXA1/C/01	STAÜBLI	NA	NA
002-002	Measurement Server	DASY6 P/N: SE UMS 028 BB	1489	SPEAG	NA	NA
002-003	Electro-Optical Converter	EOC60	1098	SPEAG	NA	NA
002-004	Light Beam Unit	SE UKS 030 AA	-	Di-soric	NA	NA
002-005	Oval Flat Phantom	ELI v8.0	2048	SPEAG	NA	NA
002-007	Measurement SW	DASY v6.14	9-5DEE27C2	SPEAG	NA	NA
002-006	Laptop Holder	P/N SM LH1 001 CD	-	SPEAG	NA	NA

*Used for WCDMA and LTE tests

A.5.2 SAR System #4**

ID #	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
004-000	6-Axis Robot	TX90XL	F11/5JL2A1/A/01	SPEAG	NA	NA
004-001	Robot Controller	CS8C	F11/5JL2A1/C/01	SPEAG	NA	NA
004-002	Oval Flat Phantom	ELI V8.0	2124	SPEAG	NA	NA
004-003	Measurement Server	SE UMS 028 BB	N/A	SPEAG	NA	NA
004-004	Light Beam Unit	SE UKS 030 AA	1030	SPEAG	NA	NA
004-005	DASY6 Software	DASY6 Software	9-658E90FA	SPEAG	NA	NA
004-014	Data Acquisition Electronics	DAE4	1704	SPEAG	2022-04-29	2023-04-29
004-008	MAIA Antenna	MAIA	1292	SPEAG	NA	NA
004-009	ANT Antenna	ANT	1112	SPEAG	NA	NA

**Used for 5G NR tests

A.5.3 Shared Instrumentation

ID #	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
123-000	USB Power Sensor	NRP-Z81	102278	R&S	2021-04-13	2023-04-13
124-000	USB Power Sensor	NRP-Z81	102279	R&S	2021-04-13	2023-04-13
135-000	Network Emulator	CMW500	152721	R&S	2022-03-29	2024-03-29
023-000	5G Network Emulator	CMX500	101444	R&S	2020-08-24	2022-08-24
451-000	Reflectometer	R140	21190006	Copper Mountain	2021-11-09	2023-11-09
126-000	Vector Signal Generator	ESG E4438C	MY45092885	Agilent	2021-05-27	2023-05-27
099-000	Liquid measurement SW	DAK-3.5 V2.6.0.5	9-2687B491	SPEAG	n/a	n/a
071-000	750 MHz System Validation Dipole	D750V3	1136	SPEAG	2021-01-21	2023-01-21
072-000	835 MHz System Validation Dipole	D835V2	4d192	SPEAG	2021-01-21	2023-01-21
073-000	1750 MHz System Validation Dipole	D1750V2	1133	SPEAG	2021-01-14	2023-01-14
074-000	1900 MHz System Validation Dipole	D1900V2	5d197	SPEAG	2021-01-14	2023-01-14
075-000	2300 MHz System Validation Dipole	D2300V2	1046	SPEAG	2021-01-13	2023-01-13
076-000	2600 MHz System Validation Dipole	D2600V2	1100	SPEAG	2021-01-13	2023-01-13
404-000	3700 MHz System Validation Dipole	D3700V2	1093	SPEAG	2021-05-21	2023-05-21
327-000	Temperature & Humidity Logger	RA32E-TH1-RAS	RA32-F0DED9	AVTECH	2021-03-09	2023-03-09
398-000	Thermometer	922	33622932/208	Testo	2021-11-09	2023-11-19
198-000	0.8-21GHz RF amplifier	TVA-82-213A	2004003	Mini-Circuits	2021-08-13	2022-08-13
078-000	RF Cable	ST-18/SMAm/SMAm/48	1158830	Huber & Suhner	2021-08-13	2022-08-01
079-000	RF Cable	ST-18/SMAm/SMAm/48	1158831	Huber & Suhner	2021-08-13	2022-08-01
077-000	Coupler	CD0.5-8-20-30	1251-002	Amd-group	2021-08-13	2022-08-01
002-009	Dosimetric E-Field probe	EX3DV4	7604	SPEAG	2021-08-16	2022-08-16
086-000	Dosimetric E-Field probe	EX3DV4	7455	SPEAG	2022-03-21	2023-03-21
003-007	Dosimetric E-Field probe	EX3DV4	7465	SPEAG	2022-07-21	2022-07-21

A.5.4 Tissue Simulant Liquid

TSL	Manufacturer / Model	Freq Range (MHz)	Main Ingredients	Note
Body WideBand System2	SPEAG MBBL600-6000V6 Batch 160603-01	600-6000	Ethanediol, Sodium petroleum sulfonate, Hexylene Glycol / 2-Methyl-pentane-2.4-diol, Alkoxyated alcohol	Used for WCDMA and LTE tests
Body WideBand System4	SPEAG MBBL600-6000V6 Batch 160630-01	600-6000	Ethanediol, Sodium petroleum sulfonate, Hexylene Glycol / 2-Methyl-pentane-2.4-diol, Alkoxyated alcohol	Used for 5G NR tests

A.6 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the table below with a coverage factor of $k = 2$ to indicate a 95% level of confidence:

SPEAG DASY6 Uncertainty Budget According to IEC/IEEE 62209-1528 (4 MHz - 6 GHz) including IEEE 1528-2013 and IEC 62209-1/2016, IEC 62209-2/2010								
Symbol	Error Description	Uncert. Value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std Unc. (1g)	Std Unc. (10g)
Measurement System Errors								
CF	Probe Calibration	±14.0 %	N	2	1	1	±7.0 %	±7.0 %
CF _{drift}	Probe Calibration Drift	±1.0 %	N	1	1	1	±1.0 %	±1.0 %
LIN	Probe Linearity	±4.7 %	R	√3	1	1	±2.7 %	±2.7 %
BBS	Broadband Signal	±3.0 %	N	2	1	1	±1.5 %	±1.5 %
ISO	Axial Isotropy	±4.7 %	R	√3	0.5	0.5	±1.4 %	±1.4 %
ISO	Hemispherical Isotropy	±9.6 %	R	√3	0.5	0.5	±2.8 %	±2.8 %
DAE	Data Acquisition	±0.3 %	N	1	1	1	±0.3 %	±0.3 %
AMB	RF Ambient	±1.8 %	N	1	1	1	±1.8 %	±1.8 %
Δ _{sys}	Probe Positioning	±0.2 %	N	1	0.33	0.33	±0.1 %	±0.1 %
DAT	Data Processing	±2.3 %	N	1	1	1	±2.3 %	±2.3 %
Phantom and Device Errors								
LIQ(σ)	Conductivity (meas.) _{DAK}	±2.5 %	N	1	0.78	0.71	±2.0 %	±1.8 %
LIQ(Tσ)	Conductivity (temp.) _{BB}	±3.4 %	R	√3	0.78	0.71	±1.5 %	±1.4 %
EPS	Phantom Permittivity	±14.0 %	R	√3	0.25	0.25	±2.0 %	±2.0 %
DAS	Distance DUT - TSL	±2.0 %	N	1	2	2	±4.0 %	±4.0 %
H	Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %
MOD	DUT Modulation _m	±2.4 %	R	√3	1	1	±1.4 %	±1.4 %
TAS	Time-average SAR	±2.6 %	R	√3	1	1	±1.5 %	±1.5 %
RF _{drift}	DUT drift	±5.0 %	N	1	1	1	±2.9 %	±2.9 %
Correction to the SAR results								
C(ε, σ)	Deviation to Target	±1.9 %	N	1	1	0.84	±1.9 %	±1.6 %
Combined Std. Uncertainty							±11.5 %	±11.4 %
Expanded STD Uncertainty							±23.1 %	±22.9 %

A.7 RF Exposure Limits

SAR assessments have been made in line with the requirements of FCC 47 CFR Part 2.1093 on the limitation of exposure of the general population / uncontrolled exposure for portable devices.

Exposure Type	General Population / Uncontrolled Environment
Peak spatial-average SAR (averaged over any 1 gram of tissue)	1.6 W/kg
Whole body average SAR	0.08 W/kg
Peak spatial-average SAR (extremities) (averaged over any 10 grams of tissue)	4.0 W/kg

Annex B. Test Results

The herein test results were performed by:

Test case measurement	Test Personnel
SAR measurement	E. Garcia, R. Luciani
Conducted measurement	F. Heurtematte

B.1 Test Conditions

B.1.1 Test SAR Test positions relative to the phantom

The device under test was a Convertible PC host platform (HP) HSN-I55C using FM350-GL WWAN module with PIFA antennas. The card was operated utilizing proprietary software (RD Tool v1.0.1.20) and each channel was measured using a communication tester to determine the maximum average power.

The device has 2 power settings:

- Laptop mode
- Tablet mode

See section 6 for details about power values for the configuration

See Annex F.3 for information about the platform antenna configuration

Laptop mode

According to FCC OET KDB 616217 D04, laptop position should be tested for SAR compliance with the display screen opened at an angle of 90° to the keyboard compartment and the notebook bottom surface must be touching the phantom.

Notebook	WWAN Ant 5	WWAN Ant 8
Position	• Laptop	• Laptop

Tablet mode

According to FCC OET KDB 616217 D04, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR Test Exclusion Threshold in FCC OET KDB 447498 D01 can be applied to determine SAR test exclusion for adjacent edge configurations. (See section 6 for power specifications)

The reduced power values shown on section 6 and the closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

Considering the antenna location diagrams in Annex F and the test exclusions described before, the surfaces/edges to be measured for each antenna are:

Tablet	WWAN Ant 5	WWAN Ant 8
Position	<ul style="list-style-type: none"> • Bottom Edge • Back Face • Right Edge 	<ul style="list-style-type: none"> • Back Face • Left Edge

See B.1.3.1 for a more detailed list of the applied reductions.

See Annex F.2 section for more information on the tested positions.

B.1.2 Test signal, Output power and Test Frequencies

B.1.2.1 LTE TDD consideration

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

LTE TDD Bands support 3GPP TS 36.211 section 4.2 for Type 2 Frame structure and table 2 for uplink-downlink configurations and table 1 for special subframe configurations

Table 1

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	6592 T_s	(1+X) 2192 T_s	(1+X) 2560 T_s	7680 · T_s	(1+X) 2192 T_s	(1+X) 2560 T_s
1	19760 T_s			20480 T_s		
2	21952 T_s			23040 T_s		
3	24144 T_s			25600 T_s		
4	26336 T_s			7680 T_s		
5	6592 T_s	(2+X) 2192 T_s	(2+X) 2560 T_s	20480 T_s	(2+X) 2192 T_s	(2+X) 2560 T_s
6	19760 T_s			23040 T_s		
7	21952 T_s			12800 T_s		
8	24144 T_s			-		
9	13168 T_s			-		
10	13168 T_s	13150 T_s	12800 T_s	-	-	-

Table2

Uplink-Downlink Config.	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.3%
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.3%
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.3%
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.7%
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.7%
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.7%
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.3%

Calculated duty cycle = Extended cyclic prefix in uplink *(T_s) *# of S + # of U / period

The configuration used for SAR testing was the number 0 which corresponds to the highest duty cycle (Power Class 3)

B.1.2.2 5G NR TDD consideration

Table3

Subframe Number																			
Radio Frame 0																			
SF0	SF1	SF2	SF3	SF4	SF5	SF6	SF7	SF8	SF9	SF0	SF1	SF2	SF3	SF4	SF5	SF6	SF7	SF8	SF9
0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9
D	s	U	U	S	U	S	U	S	U	S	U	S	U	S	U	S	U	S	U
Radio Frame 1-2																			
SF0	SF1	SF2	SF3	SF4	SF5	SF6	SF7	SF8	SF9	SF0	SF1	SF2	SF3	SF4	SF5	SF6	SF7	SF8	SF9
0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9
S	U	S	U	S	U	S	U	S	U	S	U	S	U	S	U	S	U	S	U
Radio Frame 3																			
SF0	SF1	SF2	SF3	SF4	SF5	SF6	SF7	SF8	SF9	SF0	SF1	SF2	SF3	SF4	SF5	SF6	SF7	SF8	SF9
0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9
S	U	S	U	S	U	S	U	S	U	S	U	S	U	S	U	S	U	S	U

“D”: Full DL slot, “s”: partial slot, “S”: partial slot for PUSCH, “U”: full UL slot

Frame structure and maximal measured duty cycle (91%) for NR 5G FR1 are described in the table 3

B.1.3 Evaluation Exclusion and Test Reductions

B.1.3.1 SAR evaluation exclusion

The SAR Test Exclusion Threshold in FCC OET KDB 447498 D01 v06 can be applied to determine SAR test exclusion for adjacent edge configurations. For 100MHz to 6GHz and test separation distances ≤ 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following formula:

$$[(\text{max. power of channel, including tune - up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot \left[\sqrt{f(\text{GHz})} \right] \leq 3.0 \text{ for } 1g \text{ SAR, and } \leq 7.5 \text{ for } 10g \text{ extremity SAR} \quad (1)$$

Where:

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- The values 3.0 and 7.5 are referred to as numeric thresholds

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

For test separation distances > 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined using the following formulas:

$$\left((\text{Power allowed at numeric threshold for } 50 \text{ mm in (1)}) + (\text{test separation distance} - 50 \text{ mm}) \cdot (f_{\text{MHz}} / 150) \right) \text{mW,} \quad (2)$$

for 100MHz to 1500MHz

$$\left((\text{Power allowed at numeric threshold for } 50 \text{ mm in (1)}) + (\text{test separation distance} - 50 \text{ mm}) \cdot 10 \right) \text{mW,} \quad (3)$$

for 1500MHz and ≤ 6 GHz

Test Exclusion

Antenna	Band Name	Output power				Back Face	Top Edge	Left Edge	Right Edge	Bottom Edge	Laptop	Back Face	Top Edge	Left Edge	Right Edge	Bottom Edge	Laptop
		Notebook		Tablet													
		dBm	mW	dBm	mW												
WWAN Ant 5	WCDMA II	21.0	125.9	18.5	70.8	<50	<50	<50	>50	>50	<50	T	R	R	R	T	T
	WCDMA IV	21.5	141.3	17.5	56.2	<50	<50	<50	>50	>50	<50	T	R	R	R	T	T
	WCDMA V	25.0	316.2	23.5	223.9	<50	<50	<50	>50	>50	<50	T	R	R	T	T	T
	LTE 2	21.0	125.9	18.5	70.8	<50	<50	<50	>50	>50	<50	T	R	R	R	T	T
	LTE 4	21.5	141.3	17.5	56.2	<50	<50	<50	>50	>50	<50	T	R	R	R	T	T
	LTE 5	25.0	316.2	24.5	281.8	<50	<50	<50	>50	>50	<50	T	R	R	R	T	T
	LTE 7	21.0	125.9	16.0	39.8	<50	<50	<50	>50	>50	<50	T	R	R	R	T	T
	LTE 12	25.0	316.2	20.5	112.2	<50	<50	<50	>50	>50	<50	T	R	R	R	T	T
	LTE 13	25.0	316.2	23.0	199.5	<50	<50	<50	>50	>50	<50	T	R	R	T	T	T
	LTE 14	25.0	316.2	23.0	199.5	<50	<50	<50	>50	>50	<50	T	R	R	T	T	T
	LTE 17	25.0	316.2	21.5	141.3	<50	<50	<50	>50	>50	<50	T	R	R	R	T	T
	LTE 25	21.0	125.9	18.5	70.8	<50	<50	<50	>50	>50	<50	T	R	R	R	T	T
	LTE 26	25.0	316.2	24.0	251.2	<50	<50	<50	>50	>50	<50	T	R	R	T	T	T
	LTE 30	22.5	177.8	15.5	35.5	<50	<50	<50	>50	>50	<50	T	R	R	R	T	T
	LTE 38	23.5	223.9	20.5	112.2	<50	<50	<50	>50	>50	<50	T	R	R	T	T	T
	LTE 41	21.0	125.9	16.0	39.8	<50	<50	<50	>50	>50	<50	T	R	R	T	T	T
	LTE 66	21.5	141.3	18.0	63.1	<50	<50	<50	>50	>50	<50	T	R	R	R	T	T
	LTE 71	23.0	199.5	23.0	199.5	<50	<50	<50	>50	>50	<50	T	R	R	T	T	T
	NR 2	21.0	125.9	18.5	70.8	<50	<50	<50	>50	>50	<50	R	R	R	R	R	R
	NR 5	25.0	316.2	24.5	281.8	<50	<50	<50	>50	>50	<50	T	R	R	T	T	T
	NR 7	21.0	125.9	16.0	39.8	<50	<50	<50	>50	>50	<50	T	R	R	R	T	T
	NR 25	21.0	125.9	18.5	70.8	<50	<50	<50	>50	>50	<50	T	R	R	R	T	T
	NR 30	22.5	177.8	15.5	35.5	<50	<50	<50	>50	>50	<50	T	R	R	R	T	T
	NR 38	23.5	223.9	20.5	112.2	<50	<50	<50	>50	>50	<50	T	R	R	T	T	T
NR 41	21.0	125.9	16.0	39.8	<50	<50	<50	>50	>50	<50	T	R	R	R	T	T	
NR 66	21.5	141.3	18.0	63.1	<50	<50	<50	>50	>50	<50	T	R	R	R	T	T	
NR 71	23.0	199.5	23.0	199.5	<50	<50	<50	>50	>50	<50	T	R	R	T	T	T	
NR 77	15.0	31.6	14.0	25.1	<50	<50	<50	>50	>50	<50	T	R	R	R	T	T	
NR 78	17.0	50.1	14.0	25.1	<50	<50	<50	>50	>50	<50	R	R	R	R	R	T	

T: Tested position

R: Reduced

See Annex F for a more detailed explanation of the separation distance related to the platform.

Antenna	Band Name	Output power				Back Face	Top Edge	Left Edge	Right Edge	Bottom Edge	Laptop	Back Face	Top Edge	Left Edge	Right Edge	Bottom Edge	Laptop
		Notebook		Tablet													
		dBm	mW	dBm	mW												
WWAN Ant 8	LTE 2	16.5	44.7	14.5	28.2	<50	<50	>50	>50	>50	>50	T	R	T	R	R	T
	LTE 4	17.0	50.1	15.5	35.5	<50	<50	>50	>50	>50	>50	T	R	T	R	R	T
	LTE 7	17.5	56.2	17.5	56.2	<50	<50	>50	>50	>50	>50	T	R	T	R	R	T
	LTE 25	16.5	44.7	14.5	28.2	<50	<50	>50	>50	>50	>50	T	R	T	R	R	T
	LTE 30	18.0	63.1	17.0	50.1	<50	<50	>50	>50	>50	>50	T	R	T	R	R	T
	LTE 41	17.0	50.1	17.5	56.2	<50	<50	>50	>50	>50	>50	T	R	T	R	R	T
	LTE 48	15.5	35.5	14.0	25.1	<50	<50	>50	>50	>50	>50	T	R	T	R	R	T
	LTE 66	17.5	56.2	16.0	39.8	<50	<50	>50	>50	>50	>50	T	R	T	R	R	T
	NR 2	16.5	44.7	14.5	28.2	<50	<50	>50	>50	>50	>50	T	R	T	R	R	T
	NR 41	17.0	50.1	17.5	56.2	<50	<50	>50	>50	>50	>50	T	R	T	R	R	T
	NR 66	17.5	56.2	16.0	39.8	<50	<50	>50	>50	>50	>50	T	R	T	R	R	T
	NR 77	14.5	28.2	14.0	25.1	<50	<50	>50	>50	>50	>50	T	R	T	R	R	T
NR 78	15.0	31.6	14.5	28.2	<50	<50	>50	>50	>50	>50	T	R	T	R	R	T	

T: Tested position

R: Reduced

See Annex F for a more detailed explanation of the separation distance related to the platform.

SAR test exclusion is applied for notebook and tablet position on each antenna transmitter: bottom edge, right and left (only in tablet mode at ant5) edges where the separation distance passes the 50mm limit, equations (2) and (3) are used with the corresponding frequencies for each band, the user distances for the bottom edge, left and right edges respectively for ant8 and ant5 position and with the power values described on Section 6. The table below shows all cellular bands evaluated in this report grouped by frequency band, separation distances and the corresponding power threshold in mW for each combination (distance and frequency)

Bands	Frequency	Separation distance to the body on mm										Threshold values in mW
		60	70	80	90	100	110	160	170	190	200	
LTE 12,13,14,17,71	750	223	273	323	373	423	473	723	773	873	923	
FDD V LTE 5, 26 NR 5	835	220	275	331	387	442	498	776	832	943	999	
FDD IV LTE 4, 66 NR 66	1750	213	313	413	513	613	713	1213	1313	1513	1613	
FDD II LTE 2, 25 NR 2, 25	1900	209	309	409	509	609	709	1209	1309	1509	1609	
LTE 30 NR 30	2300	199	299	399	499	599	699	1199	1299	1499	1599	
LTE 7, 38, 41 NR 7, 38, 41	2600	193	293	393	493	593	693	1193	1293	1493	1593	
LTE 48 NR 77, 78	3700	180	280	380	480	580	680	1180	1280	1480	1580	

The highest output power for all bands is 316.2 mW for notebook mode and 223.9mW for tablet mode which are smaller than all the values of the table, for distances >200mm and >70mm respectively. Refer to annex F3 for antenna position and its adjacent edges.

B.1.3.2 General SAR test reduction

According to FCC OET KDB 447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

WWAN SAR Test reduction

Transmission Mode	SAR test exclusion/reduction
HSDPA	According to FCC OET KDB 941225 D01, SAR evaluation is not required when the maximum average output power is $< \frac{1}{4}$ dB higher than the measured on the corresponding channels without HSDPA, using 12.2kbps RMC, and the maximum SAR for 12.2kbps RMC is < 1.2 W/kg.
HSUPA	According to FCC OET KDB 941225 D01, SAR evaluation is not required when the maximum average output power is $< \frac{1}{4}$ dB higher than the measured on the corresponding channels without HSUPA, using 12.2kbps RMC, and the maximum SAR for 12.2kbps RMC is < 1.2 W/kg.
DC+HSDPA	According to FCC OET KDB 941225 D01, SAR evaluation is not required when the maximum average output power is $< \frac{1}{4}$ dB higher than the measured on the corresponding channels without DC+HSDPA, using 12.2kbps RMC, and the maximum SAR for 12.2kbps RMC is < 1.2 W/kg.
LTE	<p>According to FCC OET KDB 941225 D05, testing of 100% RB allocation, higher order modulations or lower BW is not required when these conditions are met:</p> <ul style="list-style-type: none"> ○ For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. ○ For each modulation besides QPSK, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg. ○ For lower BW, only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg. <p>For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M, and L channels may not fully apply</p>
5G NR	According to TCB workshop November 2019; RF Exposure Policy Updates (5G NR FR1 NSA EN-DC UE SAR Evaluations), the FCC OET KDB 941225 D05 rules apply.

B.2 Conducted Power Measurements

B.2.1 WCDMA / HSPA / DC-HSPA

B.2.1.1 WCDMA Band II - Laptop Mode – Antenna 5

Mode	Channel Number	Freq (MHz)	Subset	Average Power Measured (dBm)	Factory Upper Tolerance (dBm)
RMC	9262	1852.4	-	20.87	21.00
	9400	1880	-	20.76	21.00
	9538	1907.6	-	20.83	21.00
HSDPA	9262	1852.4	1	20.89	21.00
			2	20.77	21.00
			3	20.80	21.00
			4	20.90	21.00
	9400	1880	1	20.75	21.00
			2	20.78	21.00
			3	20.92	21.00
			4	20.82	21.00
	9538	1907.6	1	20.82	21.00
			2	20.86	21.00
			3	20.77	21.00
			4	20.77	21.00
HSUPA	9262	1852.4	1	20.50	21.00
			2	20.89	21.00
			3	20.37	21.00
			4	20.76	21.00
			5	20.27	21.00
	9400	1880	1	20.81	21.00
			2	19.98	21.00
			3	20.89	21.00
			4	19.89	21.00
			5	20.73	21.00
	9538	1907.6	1	19.82	21.00
			2	20.81	21.00
			3	20.46	21.00
			4	20.93	21.00
			5	20.37	21.00
DC-HSDPA	9262	1852.4	1	20.80	21.00
			2	20.33	21.00
			3	20.85	21.00
			4	20.02	21.00
	9400	1880	1	20.90	21.00
			2	19.88	21.00
			3	20.77	21.00
			4	19.76	21.00
	9538	1907.6	1	20.79	21.00
			2	20.39	21.00
			3	20.24	21.00
			4	20.39	21.00

B.2.1.2 WCDMA Band II - Tablet Mode – Antenna 5

Mode	Channel Number	Freq (MHz)	Subset	Average Power Measured (dBm)	Factory Upper Tolerance (dBm)
RMC	9262	1852.4	-	18.24	18.50
	9400	1880	-	18.15	18.50
	9538	1907.6	-	18.32	18.50
HSDPA	9262	1852.4	1	18.28	18.50
			2	18.18	18.50
			3	18.31	18.50
			4	18.27	18.50
	9400	1880	1	18.18	18.50
			2	18.35	18.50
			3	18.32	18.50
			4	18.20	18.50
	9538	1907.6	1	18.39	18.50
			2	18.26	18.50
			3	18.17	18.50
			4	18.35	18.50
HSUPA	9262	1852.4	1	18.41	18.50
			2	18.29	18.50
			3	18.01	18.50
			4	18.36	18.50
			5	18.31	18.50
	9400	1880	1	18.34	18.50
			2	18.10	18.50
			3	18.23	18.50
			4	18.22	18.50
			5	18.17	18.50
	9538	1907.6	1	18.09	18.50
			2	18.33	18.50
			3	18.24	18.50
			4	18.31	18.50
			5	18.34	18.50
DC-HSDPA	9262	1852.4	1	18.22	18.50
			2	18.22	18.50
			3	18.40	18.50
			4	18.44	18.50
	9400	1880	1	18.28	18.50
			2	18.19	18.50
			3	18.17	18.50
			4	18.42	18.50
	9538	1907.6	1	18.34	18.50
			2	18.31	18.50
			3	17.99	18.50
			4	18.17	18.50

B.2.1.3 WCDMA Band IV - Laptop Mode – Antenna 5

Mode	Channel Number	Freq (MHz)	Subset	Average Power Measured (dBm)	Factory Upper Tolerance (dBm)
RMC	1312	1712.4	-	21.50	21.50
	1413	1732.6	-	21.45	21.50
	1513	1752.6	-	21.44	21.50
HSDPA	1312	1712.4	1	21.49	21.50
			2	21.44	21.50
			3	21.44	21.50
			4	21.50	21.50
	1413	1732.6	1	21.42	21.50
			2	21.46	21.50
			3	21.50	21.50
			4	21.47	21.50
	1513	1752.6	1	21.44	21.50
			2	21.47	21.50
			3	21.42	21.50
			4	21.42	21.50
HSUPA	1312	1712.4	1	20.81	21.50
			2	21.50	21.50
			3	20.63	21.50
			4	21.45	21.50
			5	20.40	21.50
	1413	1732.6	1	21.46	21.50
			2	20.78	21.50
			3	21.48	21.50
			4	20.55	21.50
			5	21.42	21.50
	1513	1752.6	1	20.60	21.50
			2	21.43	21.50
			3	20.64	21.50
			4	21.50	21.50
			5	20.51	21.50
DC-HSDPA	1312	1712.4	1	21.45	21.50
			2	20.73	21.50
			3	21.44	21.50
			4	20.71	21.50
	1413	1732.6	1	21.49	21.50
			2	20.94	21.50
			3	21.42	21.50
			4	20.57	21.50
	1513	1752.6	1	21.41	21.50
			2	20.25	21.50
			3	20.78	21.50
			4	20.94	21.50

B.2.1.4 WCDMA Band IV - Tablet Mode – Antenna 5

Mode	Channel Number	Freq (MHz)	Subset	Average Power Measured (dBm)	Factory Upper Tolerance (dBm)
RMC	1312	1712.4	-	17.47	17.50
	1413	1732.6	-	17.41	17.50
	1513	1752.6	-	17.41	17.50
HSDPA	1312	1712.4	1	17.47	17.50
			2	17.43	17.50
			3	17.41	17.50
			4	17.48	17.50
	1413	1732.6	1	17.42	17.50
			2	17.40	17.50
			3	17.50	17.50
			4	17.48	17.50
	1513	1752.6	1	17.44	17.50
			2	17.50	17.50
			3	17.44	17.50
			4	17.42	17.50
HSUPA	1312	1712.4	1	17.34	17.50
			2	17.47	17.50
			3	17.39	17.50
			4	17.42	17.50
			5	17.40	17.50
	1413	1732.6	1	17.41	17.50
			2	17.45	17.50
			3	17.49	17.50
			4	17.42	17.50
			5	17.43	17.50
	1513	1752.6	1	17.39	17.50
			2	17.41	17.50
			3	17.33	17.50
			4	17.50	17.50
			5	17.20	17.50
DC-HSDPA	1312	1712.4	1	17.47	17.50
			2	17.41	17.50
			3	17.46	17.50
			4	17.46	17.50
	1413	1732.6	1	17.49	17.50
			2	17.40	17.50
			3	17.42	17.50
			4	17.34	17.50
	1513	1752.6	1	17.42	17.50
			2	17.50	17.50
			3	17.39	17.50
			4	17.40	17.50

B.2.1.5 WCDMA Band V - Laptop Mode – Antenna 5

Mode	Channel Number	Freq (MHz)	Subset	Average Power Measured (dBm)	Factory Upper Tolerance (dBm)
RMC	4132	826.4	-	23.30	25.00
	4183	836.6	-	23.32	25.00
	4233	846.6	-	23.33	25.00
HSDPA	4132	826.4	1	23.44	25.00
			2	23.44	25.00
			3	23.40	25.00
			4	23.36	25.00
	4183	836.6	1	23.37	25.00
			2	23.28	25.00
			3	22.95	25.00
			4	22.82	25.00
	4233	846.6	1	22.84	25.00
			2	22.79	25.00
			3	22.90	25.00
			4	22.94	25.00
HSUPA	4132	826.4	1	22.83	25.00
			2	23.42	25.00
			3	22.67	25.00
			4	23.44	25.00
			5	22.71	25.00
	4183	836.6	1	23.42	25.00
			2	22.83	25.00
			3	23.37	25.00
			4	22.70	25.00
			5	23.37	25.00
	4233	846.6	1	22.11	25.00
			2	23.28	25.00
			3	22.53	25.00
			4	22.94	25.00
			5	22.63	25.00
DC-HSDPA	4132	826.4	1	22.83	25.00
			2	22.74	25.00
			3	22.85	25.00
			4	22.64	25.00
	4183	836.6	1	22.79	25.00
			2	22.45	25.00
			3	22.90	25.00
			4	22.57	25.00
	4233	846.6	1	22.92	25.00
			2	22.81	25.00
			3	22.78	25.00
			4	22.74	25.00

B.2.1.6 WCDMA Band V - Tablet Mode – Antenna 5

Mode	Channel Number	Freq (MHz)	Subset	Average Power Measured (dBm)	Factory Upper Tolerance (dBm)
RMC	4132	826.4	-	23.30	23.50
	4183	836.6	-	23.32	23.50
	4233	846.6	-	23.33	23.50
HSDPA	4132	826.4	1	23.44	23.50
			2	23.44	23.50
			3	23.40	23.50
			4	23.36	23.50
	4183	836.6	1	23.37	23.50
			2	23.28	23.50
			3	22.95	23.50
			4	22.82	23.50
	4233	846.6	1	22.84	23.50
			2	22.79	23.50
			3	22.90	23.50
			4	22.94	23.50
HSUPA	4132	826.4	1	22.83	23.50
			2	23.42	23.50
			3	22.67	23.50
			4	23.44	23.50
			5	22.71	23.50
	4183	836.6	1	23.42	23.50
			2	22.83	23.50
			3	23.37	23.50
			4	22.70	23.50
			5	23.37	23.50
	4233	846.6	1	22.11	23.50
			2	23.28	23.50
			3	22.53	23.50
			4	22.94	23.50
			5	22.63	23.50
DC-HSDPA	4132	826.4	1	22.83	23.50
			2	22.74	23.50
			3	22.85	23.50
			4	22.64	23.50
	4183	836.6	1	22.79	23.50
			2	22.45	23.50
			3	22.90	23.50
			4	22.57	23.50
	4233	846.6	1	22.92	23.50
			2	22.81	23.50
			3	22.78	23.50
			4	22.74	23.50

B.2.2 LTE

B.2.2.1 LTE Band 2 FDD – Laptop / Tablet Modes – Antennas 5 & 8

SAR Measurement for LTE Band 2 FDD (Frequency range: 1850 – 1910MHz) is covered by LTE Band 25 FDD (Frequency range: 1850 – 1915MHz) due to overlapping frequency range, with same or higher maximum tune-up and same bandwidth.

B.2.2.2 LTE Band 4 FDD – Laptop / Tablet Modes – Antennas 5 & 8

SAR Measurement for LTE Band 4 FDD (Frequency range: 1710 – 1755MHz) is covered by LTE Band 66 FDD (Frequency range: 1710 – 1780MHz) due to overlapping frequency range, with same or higher maximum tune-up and same bandwidth.

B.2.2.3 LTE Band 5 FDD – Laptop Mode – Antennas 5

SAR Measurement for LTE Band 5 FDD (Frequency range: 824 – 849MHz) is covered by LTE Band 26 FDD (Frequency range: 814 – 849MHz) due to overlapping frequency range, with same or higher maximum tune-up and same bandwidth.

B.2.2.4 LTE Band 5 FDD – Tablet Mode – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 5	10 MHz	20525	836	1RB Low	1 Pos 0	24.50	0	24.27	24.50	1	23.09
				1RB Mid	1 Pos 50	24.50	0	24.29	24.50	1	23.11
				1RB High	1 Pos 99	24.50	0	24.28	24.50	1	23.11
				50% RB Low	50 Pos 0	24.50	1	23.27	24.50	2	22.24
				50% RB Mid	50 Pos 24	24.50	1	23.23	24.50	2	22.21
				50% RB High	50 Pos 50	24.50	1	23.21	24.50	2	22.20
	100% RB	100 Pos 0	24.50	1	23.23	24.50	2	22.25			
	5 MHz	20425	826	1RB Low	1 Pos 0	24.50	0	24.21	24.50	1	23.43
				1RB Mid	1 Pos 38	24.50	0	24.23	24.50	1	23.45
				1RB High	1 Pos 74	24.50	0	24.27	24.50	1	23.44
				50% RB Low	38 Pos 0	24.50	1	23.13	24.50	2	22.11
				50% RB Mid	38 Pos 19	24.50	1	23.16	24.50	2	22.10
				50% RB High	38 Pos 39	24.50	1	23.13	24.50	2	22.09
		100% RB	75 Pos 0	24.50	1	23.17	24.50	2	22.19		
		20525	836	1RB Low	1 Pos 0	24.50	0	24.26	24.50	1	23.46
				1RB Mid	1 Pos 38	24.50	0	24.22	24.50	1	23.47
				1RB High	1 Pos 74	24.50	0	24.20	24.50	1	23.45
				50% RB Low	38 Pos 0	24.50	1	23.28	24.50	2	22.32
				50% RB Mid	38 Pos 19	24.50	1	23.21	24.50	2	22.25
				50% RB High	38 Pos 39	24.50	1	23.18	24.50	2	22.21
		100% RB	75 Pos 0	24.50	1	23.22	24.50	2	22.26		
		20625	846	1RB Low	1 Pos 0	24.50	0	24.35	24.50	1	23.45
				1RB Mid	1 Pos 38	24.50	0	24.37	24.50	1	23.44
				1RB High	1 Pos 74	24.50	0	24.38	24.50	1	23.43
				50% RB Low	38 Pos 0	24.50	1	23.27	24.50	2	22.20
	50% RB Mid			38 Pos 19	24.50	1	23.28	24.50	2	22.20	
	50% RB High			38 Pos 39	24.50	1	23.26	24.50	2	22.18	
	100% RB	75 Pos 0	24.50	1	23.23	24.50	2	22.22			
	3 MHz	20415	826	1RB Low	1 Pos 0	24.50	0	24.13	24.50	1	23.42
				1RB Mid	1 Pos 24	24.50	0	24.13	24.50	1	23.43
				1RB High	1 Pos 49	24.50	0	24.09	24.50	1	23.48
				50% RB Low	25 Pos 0	24.50	1	23.15	24.50	2	22.14
				50% RB Mid	25 Pos 12	24.50	1	23.16	24.50	2	22.19
				50% RB High	25 Pos 25	24.50	1	23.14	24.50	2	22.15
		100% RB	50 Pos 0	24.50	1	23.09	24.50	2	22.07		
		20525	836	1RB Low	1 Pos 0	24.50	0	24.24	24.50	1	23.50
				1RB Mid	1 Pos 24	24.50	0	24.22	24.50	1	23.48
				1RB High	1 Pos 49	24.50	0	24.17	24.50	1	23.48
				50% RB Low	25 Pos 0	24.50	1	23.18	24.50	2	22.22
				50% RB Mid	25 Pos 12	24.50	1	23.19	24.50	2	22.22
				50% RB High	25 Pos 25	24.50	1	23.16	24.50	2	22.20
		100% RB	50 Pos 0	24.50	1	23.22	24.50	2	22.14		
20635		848	1RB Low	1 Pos 0	24.50	0	24.31	24.50	1	23.50	
			1RB Mid	1 Pos 24	24.50	0	24.30	24.50	1	23.50	
			1RB High	1 Pos 49	24.50	0	24.28	24.50	1	23.50	
			50% RB Low	25 Pos 0	24.50	1	23.16	24.50	2	22.24	
	50% RB Mid		25 Pos 12	24.50	1	23.20	24.50	2	22.25		
	50% RB High		25 Pos 25	24.50	1	23.16	24.50	2	22.21		
100% RB	50 Pos 0	24.50	1	23.22	24.50	2	22.20				

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 5	1.4 MHz	20407	825	1RB Low	1 Pos 0	24.50	0	24.02	24.50	1	23.03
				1RB Mid	1 Pos 12	24.50	0	24.12	24.50	1	23.10
				1RB High	1 Pos 24	24.50	0	24.07	24.50	1	23.05
				50% RB Low	12 Pos 0	24.50	0	23.98	24.50	1	23.13
				50% RB Mid	12 Pos 6	24.50	0	24.01	24.50	1	23.14
				50% RB High	12 Pos 11	24.50	0	24.00	24.50	1	23.17
		100% RB	25 Pos 0	24.50	1	22.97	24.50	2	21.97		
		20525	836	1RB Low	1 Pos 0	24.50	0	24.10	24.50	1	23.00
				1RB Mid	1 Pos 12	24.50	0	24.13	24.50	1	23.02
				1RB High	1 Pos 24	24.50	0	24.10	24.50	1	23.01
				50% RB Low	12 Pos 0	24.50	0	24.15	24.50	1	23.07
				50% RB Mid	12 Pos 6	24.50	0	24.14	24.50	1	23.05
				50% RB High	12 Pos 11	24.50	0	24.07	24.50	1	23.03
		100% RB	25 Pos 0	24.50	1	23.05	24.50	2	22.04		
		20643	848	1RB Low	1 Pos 0	24.50	0	24.08	24.50	1	23.02
				1RB Mid	1 Pos 12	24.50	0	24.09	24.50	1	23.04
				1RB High	1 Pos 24	24.50	0	24.05	24.50	1	23.00
				50% RB Low	12 Pos 0	24.50	0	24.06	24.50	1	23.26
				50% RB Mid	12 Pos 6	24.50	0	24.07	24.50	1	23.27
				50% RB High	12 Pos 11	24.50	0	24.04	24.50	1	23.27
		100% RB	25 Pos 0	24.50	1	23.06	24.50	2	22.22		

B.2.2.5 LTE Band 7 FDD – Laptop Mode – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 7	20 MHz	20850	2510	1RB Low	1 Pos 0	21.00	0	20.01	21.00	1	19.22
				1RB Mid	1 Pos 50	21.00	0	20.15	21.00	1	19.35
				1RB High	1 Pos 99	21.00	0	20.07	21.00	1	19.25
				50% RB Low	50 Pos 0	21.00	1	19.11	21.00	2	18.10
				50% RB Mid	50 Pos 24	21.00	1	19.16	21.00	2	18.19
				50% RB High	50 Pos 50	21.00	1	19.13	21.00	2	18.11
		100% RB	100 Pos 0	21.00	1	19.10	21.00	2	18.09		
		21100	2535	1RB Low	1 Pos 0	21.00	0	20.05	21.00	1	18.85
				1RB Mid	1 Pos 50	21.00	0	20.22	21.00	1	18.99
				1RB High	1 Pos 99	21.00	0	20.17	21.00	1	18.92
				50% RB Low	50 Pos 0	21.00	1	19.21	21.00	2	18.18
				50% RB Mid	50 Pos 24	21.00	1	19.21	21.00	2	18.24
				50% RB High	50 Pos 50	21.00	1	19.11	21.00	2	18.15
		100% RB	100 Pos 0	21.00	1	19.14	21.00	2	18.12		
		21350	2560	1RB Low	1 Pos 0	21.00	0	20.17	21.00	1	18.99
				1RB Mid	1 Pos 50	21.00	0	20.24	21.00	1	19.06
				1RB High	1 Pos 99	21.00	0	20.21	21.00	1	19.05
				50% RB Low	50 Pos 0	21.00	1	19.27	21.00	2	18.23
	50% RB Mid			50 Pos 24	21.00	1	19.24	21.00	2	18.17	
	50% RB High			50 Pos 50	21.00	1	19.12	21.00	2	18.08	
	100% RB	100 Pos 0	21.00	1	19.21	21.00	2	18.19			
	15 MHz	20825	2507.5	1RB Low	1 Pos 0	21.00	0	20.02	21.00	1	19.28
				1RB Mid	1 Pos 38	21.00	0	20.10	21.00	1	19.40
				1RB High	1 Pos 74	21.00	0	20.01	21.00	1	19.30
				50% RB Low	38 Pos 0	21.00	1	19.00	21.00	2	18.00
				50% RB Mid	38 Pos 19	21.00	1	19.10	21.00	2	18.12
				50% RB High	38 Pos 39	21.00	1	19.12	21.00	2	18.09
		100% RB	75 Pos 0	21.00	1	19.10	21.00	2	18.10		
		21100	2535	1RB Low	1 Pos 0	21.00	0	20.14	21.00	1	19.18
				1RB Mid	1 Pos 38	21.00	0	20.22	21.00	1	19.25
				1RB High	1 Pos 74	21.00	0	20.13	21.00	1	19.16
				50% RB Low	38 Pos 0	21.00	1	19.08	21.00	2	18.11
				50% RB Mid	38 Pos 19	21.00	1	19.12	21.00	2	18.07
				50% RB High	38 Pos 39	21.00	1	19.16	21.00	2	18.11
		100% RB	75 Pos 0	21.00	1	19.11	21.00	2	18.11		
		21375	2562.5	1RB Low	1 Pos 0	21.00	0	20.11	21.00	1	19.30
				1RB Mid	1 Pos 38	21.00	0	20.16	21.00	1	19.34
				1RB High	1 Pos 74	21.00	0	20.16	21.00	1	19.30
				50% RB Low	38 Pos 0	21.00	1	19.20	21.00	2	18.19
	50% RB Mid			38 Pos 19	21.00	1	19.19	21.00	2	18.25	
	50% RB High			38 Pos 39	21.00	1	19.14	21.00	2	18.20	
	100% RB	75 Pos 0	21.00	1	19.16	21.00	2	18.17			
	10 MHz	20800	2505	1RB Low	1 Pos 0	21.00	0	20.08	21.00	1	19.35
				1RB Mid	1 Pos 24	21.00	0	20.13	21.00	1	19.42
				1RB High	1 Pos 49	21.00	0	20.16	21.00	1	19.41
				50% RB Low	25 Pos 0	21.00	1	19.10	21.00	2	18.17
				50% RB Mid	25 Pos 12	21.00	1	19.06	21.00	2	18.21
				50% RB High	25 Pos 25	21.00	1	19.22	21.00	2	18.27
100% RB		50 Pos 0	21.00	1	19.16	21.00	2	18.14			
21100		2535	1RB Low	1 Pos 0	21.00	0	20.10	21.00	1	18.97	
			1RB Mid	1 Pos 24	21.00	0	20.22	21.00	1	19.07	
			1RB High	1 Pos 49	21.00	0	20.17	21.00	1	19.01	
			50% RB Low	25 Pos 0	21.00	1	19.05	21.00	2	18.12	
			50% RB Mid	25 Pos 12	21.00	1	19.13	21.00	2	18.13	
			50% RB High	25 Pos 25	21.00	1	19.17	21.00	2	18.16	
100% RB		50 Pos 0	21.00	1	19.14	21.00	2	18.11			
21400		2565	1RB Low	1 Pos 0	21.00	0	20.16	21.00	1	19.32	
			1RB Mid	1 Pos 24	21.00	0	20.18	21.00	1	19.35	
			1RB High	1 Pos 49	21.00	0	20.23	21.00	1	19.32	
			50% RB Low	25 Pos 0	21.00	1	19.23	21.00	2	18.25	
	50% RB Mid		25 Pos 12	21.00	1	19.15	21.00	2	18.22		
	50% RB High		25 Pos 25	21.00	1	19.17	21.00	2	18.24		
100% RB	50 Pos 0	21.00	1	19.24	21.00	2	18.21				

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 7	5 MHz	20775	2502.5	1RB Low	1 Pos 0	21.00	0	20.09	21.00	1	19.37
				1RB Mid	1 Pos 12	21.00	0	20.11	21.00	1	19.34
				1RB High	1 Pos 24	21.00	0	20.13	21.00	1	19.38
				50% RB Low	12 Pos 0	21.00	1	19.04	21.00	2	18.03
				50% RB Mid	12 Pos 6	21.00	1	19.06	21.00	2	18.05
				50% RB High	12 Pos 11	21.00	1	19.08	21.00	2	18.04
		21100	2535	100% RB	25 Pos 0	21.00	1	19.06	21.00	2	18.12
				1RB Low	1 Pos 0	21.00	0	20.19	21.00	1	19.46
				1RB Mid	1 Pos 12	21.00	0	20.16	21.00	1	19.43
				1RB High	1 Pos 24	21.00	0	20.19	21.00	1	19.45
				50% RB Low	12 Pos 0	21.00	1	19.10	21.00	2	18.08
				50% RB Mid	12 Pos 6	21.00	1	19.11	21.00	2	18.12
		21425	2567.5	50% RB High	12 Pos 11	21.00	1	19.11	21.00	2	18.07
				100% RB	25 Pos 0	21.00	1	19.13	21.00	2	18.16
				1RB Low	1 Pos 0	21.00	0	20.11	21.00	1	19.36
				1RB Mid	1 Pos 12	21.00	0	20.15	21.00	1	19.39
				1RB High	1 Pos 24	21.00	0	20.16	21.00	1	19.42
				50% RB Low	12 Pos 0	21.00	1	19.20	21.00	2	18.26
		50% RB Mid	12 Pos 6	21.00	1	19.16	21.00	2	18.19		
		50% RB High	12 Pos 11	21.00	1	19.13	21.00	2	18.21		
		100% RB	25 Pos 0	21.00	1	19.16	21.00	2	18.18		

B.2.2.6 LTE Band 7 FDD – Tablet mode – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 7	20 MHz	20850	2510	1RB Low	1 Pos 0	16.00	0	14.86	16.00	1	14.06
				1RB Mid	1 Pos 50	16.00	0	15.05	16.00	1	14.28
				1RB High	1 Pos 99	16.00	0	14.93	16.00	1	14.11
				50% RB Low	50 Pos 0	16.00	1	14.00	16.00	2	12.96
				50% RB Mid	50 Pos 24	16.00	1	14.03	16.00	2	13.03
				50% RB High	50 Pos 50	16.00	1	14.08	16.00	2	13.05
		100% RB	100 Pos 0	16.00	1	14.01	16.00	2	13.01		
		21100	2535	1RB Low	1 Pos 0	16.00	0	14.87	16.00	1	14.09
				1RB Mid	1 Pos 50	16.00	0	15.09	16.00	1	14.33
				1RB High	1 Pos 99	16.00	0	15.01	16.00	1	14.21
				50% RB Low	50 Pos 0	16.00	1	14.07	16.00	2	13.05
				50% RB Mid	50 Pos 24	16.00	1	14.08	16.00	2	13.06
				50% RB High	50 Pos 50	16.00	1	14.11	16.00	2	13.08
		100% RB	100 Pos 0	16.00	1	14.10	16.00	2	13.05		
		21350	2560	1RB Low	1 Pos 0	16.00	0	14.98	16.00	1	14.18
				1RB Mid	1 Pos 50	16.00	0	15.07	16.00	1	14.31
				1RB High	1 Pos 99	16.00	0	15.06	16.00	1	14.24
				50% RB Low	50 Pos 0	16.00	1	14.12	16.00	2	13.12
	50% RB Mid			50 Pos 24	16.00	1	14.08	16.00	2	13.13	
	50% RB High			50 Pos 50	16.00	1	14.11	16.00	2	13.10	
	100% RB	100 Pos 0	16.00	1	14.10	16.00	2	13.08			
	15 MHz	20825	2507.5	1RB Low	1 Pos 0	16.00	0	14.93	16.00	1	14.17
				1RB Mid	1 Pos 38	16.00	0	15.01	16.00	1	14.29
				1RB High	1 Pos 74	16.00	0	14.94	16.00	1	14.22
				50% RB Low	38 Pos 0	16.00	1	13.95	16.00	2	12.97
				50% RB Mid	38 Pos 19	16.00	1	14.00	16.00	2	13.01
				50% RB High	38 Pos 39	16.00	1	14.03	16.00	2	13.02
		100% RB	75 Pos 0	16.00	1	14.06	16.00	2	13.02		
		21100	2535	1RB Low	1 Pos 0	16.00	0	14.96	16.00	1	14.27
				1RB Mid	1 Pos 38	16.00	0	15.05	16.00	1	14.36
				1RB High	1 Pos 74	16.00	0	14.98	16.00	1	14.27
				50% RB Low	38 Pos 0	16.00	1	14.00	16.00	2	13.02
				50% RB Mid	38 Pos 19	16.00	1	14.03	16.00	2	13.02
				50% RB High	38 Pos 39	16.00	1	14.04	16.00	2	13.07
		100% RB	75 Pos 0	16.00	1	14.07	16.00	2	13.05		
		21375	2562.5	1RB Low	1 Pos 0	16.00	0	14.97	16.00	1	14.24
				1RB Mid	1 Pos 38	16.00	0	15.07	16.00	1	14.39
				1RB High	1 Pos 74	16.00	0	15.06	16.00	1	14.36
				50% RB Low	38 Pos 0	16.00	1	14.06	16.00	2	13.02
	50% RB Mid			38 Pos 19	16.00	1	14.08	16.00	2	13.09	
	50% RB High			38 Pos 39	16.00	1	14.08	16.00	2	13.12	
	100% RB	75 Pos 0	16.00	1	14.12	16.00	2	13.10			
	10 MHz	20800	2505	1RB Low	1 Pos 0	16.00	0	14.99	16.00	1	14.26
				1RB Mid	1 Pos 24	16.00	0	15.07	16.00	1	14.32
				1RB High	1 Pos 49	16.00	0	15.05	16.00	1	14.32
				50% RB Low	25 Pos 0	16.00	1	14.04	16.00	2	13.09
				50% RB Mid	25 Pos 12	16.00	1	14.03	16.00	2	13.09
				50% RB High	25 Pos 25	16.00	1	14.09	16.00	2	13.16
100% RB		50 Pos 0	16.00	1	14.10	16.00	2	13.06			
21100		2535	1RB Low	1 Pos 0	16.00	0	14.99	16.00	1	14.29	
			1RB Mid	1 Pos 24	16.00	0	15.13	16.00	1	14.40	
			1RB High	1 Pos 49	16.00	0	15.07	16.00	1	14.35	
			50% RB Low	25 Pos 0	16.00	1	14.06	16.00	2	13.13	
			50% RB Mid	25 Pos 12	16.00	1	14.05	16.00	2	13.16	
			50% RB High	25 Pos 25	16.00	1	14.11	16.00	2	13.17	
100% RB		50 Pos 0	16.00	1	14.13	16.00	2	13.06			
21400		2565	1RB Low	1 Pos 0	16.00	0	15.04	16.00	1	14.32	
			1RB Mid	1 Pos 24	16.00	0	15.15	16.00	1	14.42	
			1RB High	1 Pos 49	16.00	0	15.15	16.00	1	14.40	
			50% RB Low	25 Pos 0	16.00	1	14.12	16.00	2	13.19	
	50% RB Mid		25 Pos 12	16.00	1	14.11	16.00	2	13.21		
	50% RB High		25 Pos 25	16.00	1	14.17	16.00	2	13.22		
100% RB	50 Pos 0	16.00	1	14.21	16.00	2	13.16				

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 7	5 MHz	20775	2502.5	1RB Low	1 Pos 0	16.00	0	15.07	16.00	1	14.32
				1RB Mid	1 Pos 12	16.00	0	15.11	16.00	1	14.35
				1RB High	1 Pos 24	16.00	0	15.08	16.00	1	14.34
				50% RB Low	12 Pos 0	16.00	1	14.01	16.00	2	12.99
				50% RB Mid	12 Pos 6	16.00	1	14.02	16.00	2	12.99
				50% RB High	12 Pos 11	16.00	1	14.03	16.00	2	12.98
				100% RB	25 Pos 0	16.00	1	14.06	16.00	2	13.07
		21100	2535	1RB Low	1 Pos 0	16.00	0	15.10	16.00	1	14.38
				1RB Mid	1 Pos 12	16.00	0	15.15	16.00	1	14.40
				1RB High	1 Pos 24	16.00	0	15.14	16.00	1	14.39
				50% RB Low	12 Pos 0	16.00	1	14.10	16.00	2	13.06
				50% RB Mid	12 Pos 6	16.00	1	14.05	16.00	2	13.01
				50% RB High	12 Pos 11	16.00	1	14.07	16.00	2	13.01
				100% RB	25 Pos 0	16.00	1	14.09	16.00	2	13.09
		21425	2567.5	1RB Low	1 Pos 0	16.00	0	15.14	16.00	1	14.37
				1RB Mid	1 Pos 12	16.00	0	15.19	16.00	1	14.44
				1RB High	1 Pos 24	16.00	0	15.18	16.00	1	14.39
				50% RB Low	12 Pos 0	16.00	1	14.15	16.00	2	13.03
				50% RB Mid	12 Pos 6	16.00	1	14.12	16.00	2	13.07
				50% RB High	12 Pos 11	16.00	1	14.13	16.00	2	13.06
				100% RB	25 Pos 0	16.00	1	14.15	16.00	2	13.15

B.2.2.7 LTE Band 7 FDD – Laptop & Tablet modes – Antenna 8

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 7	20 MHz	20850	2510	1RB Low	1 Pos 0	17.50	0	16.62	17.50	1	15.89
				1RB Mid	1 Pos 50	17.50	0	16.81	17.50	1	16.10
				1RB High	1 Pos 99	17.50	0	16.67	17.50	1	15.97
				50% RB Low	50 Pos 0	17.50	1	15.75	17.50	2	14.71
				50% RB Mid	50 Pos 24	17.50	1	15.77	17.50	2	14.73
				50% RB High	50 Pos 50	17.50	1	15.78	17.50	2	14.75
		100% RB	100 Pos 0	17.50	1	15.77	17.50	2	14.76		
		21100	2535	1RB Low	1 Pos 0	17.50	0	16.69	17.50	1	15.95
				1RB Mid	1 Pos 50	17.50	0	16.88	17.50	1	16.18
				1RB High	1 Pos 99	17.50	0	16.77	17.50	1	16.08
				50% RB Low	50 Pos 0	17.50	1	15.79	17.50	2	14.74
				50% RB Mid	50 Pos 24	17.50	1	15.82	17.50	2	14.80
				50% RB High	50 Pos 50	17.50	1	15.76	17.50	2	14.78
		100% RB	100 Pos 0	17.50	1	15.83	17.50	2	14.79		
		21350	2560	1RB Low	1 Pos 0	17.50	0	16.73	17.50	1	16.01
				1RB Mid	1 Pos 50	17.50	0	16.83	17.50	1	16.11
				1RB High	1 Pos 99	17.50	0	16.74	17.50	1	16.02
				50% RB Low	50 Pos 0	17.50	1	15.80	17.50	2	14.75
	50% RB Mid			50 Pos 24	17.50	1	15.81	17.50	2	14.81	
	50% RB High			50 Pos 50	17.50	1	15.82	17.50	2	14.76	
	100% RB	100 Pos 0	17.50	1	15.82	17.50	2	14.81			
	15 MHz	20825	2507.5	1RB Low	1 Pos 0	17.50	0	16.64	17.50	1	16.27
				1RB Mid	1 Pos 38	17.50	0	16.72	17.50	1	16.34
				1RB High	1 Pos 74	17.50	0	16.64	17.50	1	16.26
				50% RB Low	38 Pos 0	17.50	1	15.69	17.50	2	14.68
				50% RB Mid	38 Pos 19	17.50	1	15.77	17.50	2	14.77
				50% RB High	38 Pos 39	17.50	1	15.74	17.50	2	14.74
		100% RB	75 Pos 0	17.50	1	15.73	17.50	2	14.75		
		21100	2535	1RB Low	1 Pos 0	17.50	0	16.68	17.50	1	16.35
				1RB Mid	1 Pos 38	17.50	0	16.74	17.50	1	16.42
				1RB High	1 Pos 74	17.50	0	16.69	17.50	1	16.34
				50% RB Low	38 Pos 0	17.50	1	15.75	17.50	2	14.77
				50% RB Mid	38 Pos 19	17.50	1	15.78	17.50	2	14.80
				50% RB High	38 Pos 39	17.50	1	15.78	17.50	2	14.82
		100% RB	75 Pos 0	17.50	1	15.80	17.50	2	14.77		
		21375	2562.5	1RB Low	1 Pos 0	17.50	0	16.64	17.50	1	16.31
				1RB Mid	1 Pos 38	17.50	0	16.74	17.50	1	16.41
				1RB High	1 Pos 74	17.50	0	16.75	17.50	1	16.36
				50% RB Low	38 Pos 0	17.50	1	15.75	17.50	2	14.72
	50% RB Mid			38 Pos 19	17.50	1	15.82	17.50	2	14.81	
	50% RB High			38 Pos 39	17.50	1	15.82	17.50	2	14.81	
	100% RB	75 Pos 0	17.50	1	15.80	17.50	2	14.81			
	10 MHz	20800	2505	1RB Low	1 Pos 0	17.50	0	16.72	17.50	1	16.27
				1RB Mid	1 Pos 24	17.50	0	16.78	17.50	1	16.35
				1RB High	1 Pos 49	17.50	0	16.78	17.50	1	16.36
				50% RB Low	25 Pos 0	17.50	1	15.76	17.50	2	14.80
				50% RB Mid	25 Pos 12	17.50	1	15.77	17.50	2	14.81
				50% RB High	25 Pos 25	17.50	1	15.80	17.50	2	14.82
100% RB		50 Pos 0	17.50	1	15.81	17.50	2	14.78			
21100		2535	1RB Low	1 Pos 0	17.50	0	16.73	17.50	1	16.30	
			1RB Mid	1 Pos 24	17.50	0	16.80	17.50	1	16.43	
			1RB High	1 Pos 49	17.50	0	16.78	17.50	1	16.40	
			50% RB Low	25 Pos 0	17.50	1	15.78	17.50	2	14.85	
			50% RB Mid	25 Pos 12	17.50	1	15.81	17.50	2	14.84	
			50% RB High	25 Pos 25	17.50	1	15.80	17.50	2	14.88	
100% RB		50 Pos 0	17.50	1	15.85	17.50	2	14.82			
21400		2565	1RB Low	1 Pos 0	17.50	0	16.72	17.50	1	16.34	
			1RB Mid	1 Pos 24	17.50	0	16.79	17.50	1	16.40	
			1RB High	1 Pos 49	17.50	0	16.81	17.50	1	16.39	
			50% RB Low	25 Pos 0	17.50	1	15.82	17.50	2	14.85	
	50% RB Mid		25 Pos 12	17.50	1	15.84	17.50	2	14.88		
	50% RB High		25 Pos 25	17.50	1	15.84	17.50	2	14.87		
100% RB	50 Pos 0	17.50	1	15.89	17.50	2	14.86				

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 7	5 MHz	20775	2502.5	1RB Low	1 Pos 0	17.50	0	16.78	17.50	1	15.60
				1RB Mid	1 Pos 12	17.50	0	16.84	17.50	1	15.65
				1RB High	1 Pos 24	17.50	0	16.81	17.50	1	15.65
				50% RB Low	12 Pos 0	17.50	1	15.70	17.50	2	14.72
				50% RB Mid	12 Pos 6	17.50	1	15.68	17.50	2	14.67
				50% RB High	12 Pos 11	17.50	1	15.68	17.50	2	14.68
				100% RB	25 Pos 0	17.50	1	15.69	17.50	2	14.77
		21100	2535	1RB Low	1 Pos 0	17.50	0	16.85	17.50	1	15.71
				1RB Mid	1 Pos 12	17.50	0	16.90	17.50	1	15.74
				1RB High	1 Pos 24	17.50	0	16.87	17.50	1	15.72
				50% RB Low	12 Pos 0	17.50	1	15.77	17.50	2	14.79
				50% RB Mid	12 Pos 6	17.50	1	15.76	17.50	2	14.73
				50% RB High	12 Pos 11	17.50	1	15.78	17.50	2	14.73
				100% RB	25 Pos 0	17.50	1	15.78	17.50	2	14.84
		21425	2567.5	1RB Low	1 Pos 0	17.50	0	16.84	17.50	1	15.70
				1RB Mid	1 Pos 12	17.50	0	16.95	17.50	1	15.77
				1RB High	1 Pos 24	17.50	0	16.90	17.50	1	15.73
				50% RB Low	12 Pos 0	17.50	1	15.83	17.50	2	14.82
				50% RB Mid	12 Pos 6	17.50	1	15.82	17.50	2	14.81
				50% RB High	12 Pos 11	17.50	1	15.80	17.50	2	14.81
				100% RB	25 Pos 0	17.50	1	15.84	17.50	2	14.89

B.2.2.8 LTE Band 12 FDD – Laptop mode – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 12	10 MHz	23095	707.5	1RB Low	1 Pos 0	25.00	0	24.32	25.00	1	23.61
				1RB Mid	1 Pos 24	25.00	0	24.38	25.00	1	23.68
				1RB High	1 Pos 49	25.00	0	24.31	25.00	1	23.62
				50% RB Low	25 Pos 0	25.00	1	23.32	25.00	2	22.38
				50% RB Mid	25 Pos 12	25.00	1	23.32	25.00	2	22.41
				50% RB High	25 Pos 24	25.00	1	23.35	25.00	2	22.43
	100% RB	50 Pos 0	25.00	1	23.34	25.00	2	22.34			
	5 MHz	23035	701.5	1RB Low	1 Pos 0	25.00	0	24.48	25.00	1	23.71
				1RB Mid	1 Pos 12	25.00	0	24.48	25.00	1	23.70
				1RB High	1 Pos 24	25.00	0	24.55	25.00	1	23.76
				50% RB Low	12 Pos 0	25.00	1	23.46	25.00	2	22.43
				50% RB Mid	12 Pos 6	25.00	1	23.38	25.00	2	22.39
				50% RB High	12 Pos 11	25.00	1	23.41	25.00	2	22.32
		100% RB	25 Pos 0	25.00	1	23.44	25.00	2	22.44		
		23095	707.5	1RB Low	1 Pos 0	25.00	0	24.39	25.00	1	23.68
				1RB Mid	1 Pos 12	25.00	0	24.38	25.00	1	23.65
				1RB High	1 Pos 24	25.00	0	24.35	25.00	1	23.61
				50% RB Low	12 Pos 0	25.00	1	23.41	25.00	2	22.40
				50% RB Mid	12 Pos 6	25.00	1	23.41	25.00	2	22.40
				50% RB High	12 Pos 11	25.00	1	23.35	25.00	2	22.40
		100% RB	25 Pos 0	25.00	1	23.35	25.00	2	22.35		
		23155	713.5	1RB Low	1 Pos 0	25.00	0	24.32	25.00	1	23.55
				1RB Mid	1 Pos 12	25.00	0	24.36	25.00	1	23.56
				1RB High	1 Pos 24	25.00	0	24.38	25.00	1	23.55
				50% RB Low	12 Pos 0	25.00	1	23.41	25.00	2	22.34
	50% RB Mid			12 Pos 6	25.00	1	23.34	25.00	2	22.27	
	50% RB High			12 Pos 11	25.00	1	23.32	25.00	2	22.26	
	100% RB	25 Pos 0	25.00	1	23.34	25.00	2	22.32			
	3 MHz	23025	700.5	1RB Low	1 Pos 0	25.00	0	24.36	25.00	1	23.69
				1RB Mid	1 Pos 7	25.00	0	24.38	25.00	1	23.68
				1RB High	1 Pos 14	25.00	0	24.32	25.00	1	23.67
				50% RB Low	8 Pos 0	25.00	1	23.35	25.00	2	22.43
				50% RB Mid	8 Pos 4	25.00	1	23.36	25.00	2	22.43
				50% RB High	8 Pos 7	25.00	1	23.40	25.00	2	22.38
		100% RB	15 Pos 0	25.00	1	23.36	25.00	2	22.33		
		23095	707.5	1RB Low	1 Pos 0	25.00	0	24.37	25.00	1	23.67
				1RB Mid	1 Pos 7	25.00	0	24.36	25.00	1	23.64
				1RB High	1 Pos 14	25.00	0	24.33	25.00	1	23.65
				50% RB Low	8 Pos 0	25.00	1	23.36	25.00	2	22.34
				50% RB Mid	8 Pos 4	25.00	1	23.36	25.00	2	22.39
				50% RB High	8 Pos 7	25.00	1	23.32	25.00	2	22.37
		100% RB	15 Pos 0	25.00	1	23.33	25.00	2	22.33		
		23165	714.5	1RB Low	1 Pos 0	25.00	0	24.31	25.00	1	23.60
				1RB Mid	1 Pos 7	25.00	0	24.26	25.00	1	23.57
				1RB High	1 Pos 14	25.00	0	24.21	25.00	1	23.61
				50% RB Low	8 Pos 0	25.00	1	23.33	25.00	2	22.38
				50% RB Mid	8 Pos 4	25.00	1	23.30	25.00	2	22.36
				50% RB High	8 Pos 7	25.00	1	23.26	25.00	2	22.30
100% RB		15 Pos 0	25.00	1	23.29	25.00	2	22.28			

B.2.2.9 LTE Band 12 FDD – Tablet mode – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 12	10 MHz	23095	707.5	1RB Low	1 Pos 0	20.50	0	19.28	20.50	1	18.55
				1RB Mid	1 Pos 24	20.50	0	19.30	20.50	1	18.59
				1RB High	1 Pos 49	20.50	0	19.17	20.50	1	18.56
				50% RB Low	25 Pos 0	20.50	1	18.24	20.50	2	17.28
				50% RB Mid	25 Pos 12	20.50	1	18.25	20.50	2	17.29
				50% RB High	25 Pos 24	20.50	1	18.25	20.50	2	17.33
	100% RB	50 Pos 0	20.50	1	18.25	20.50	2	17.23			
	5 MHz	23035	701.5	1RB Low	1 Pos 0	20.50	0	19.35	20.50	1	18.61
				1RB Mid	1 Pos 12	20.50	0	19.35	20.50	1	18.62
				1RB High	1 Pos 24	20.50	0	19.41	20.50	1	18.66
				50% RB Low	12 Pos 0	20.50	1	18.33	20.50	2	17.29
				50% RB Mid	12 Pos 6	20.50	1	18.27	20.50	2	17.25
				50% RB High	12 Pos 11	20.50	1	18.23	20.50	2	17.18
		100% RB	25 Pos 0	20.50	1	18.31	20.50	2	17.30		
		23095	707.5	1RB Low	1 Pos 0	20.50	0	19.31	20.50	1	18.60
				1RB Mid	1 Pos 12	20.50	0	19.28	20.50	1	18.56
				1RB High	1 Pos 24	20.50	0	19.28	20.50	1	18.54
				50% RB Low	12 Pos 0	20.50	1	18.24	20.50	2	17.22
				50% RB Mid	12 Pos 6	20.50	1	18.25	20.50	2	17.27
				50% RB High	12 Pos 11	20.50	1	18.24	20.50	2	17.27
		100% RB	25 Pos 0	20.50	1	18.23	20.50	2	17.25		
		23155	713.5	1RB Low	1 Pos 0	20.50	0	19.29	20.50	1	18.40
				1RB Mid	1 Pos 12	20.50	0	19.26	20.50	1	18.48
				1RB High	1 Pos 24	20.50	0	19.26	20.50	1	18.46
				50% RB Low	12 Pos 0	20.50	1	18.31	20.50	2	17.19
	50% RB Mid			12 Pos 6	20.50	1	18.25	20.50	2	17.16	
	50% RB High			12 Pos 11	20.50	1	18.22	20.50	2	17.16	
	100% RB	25 Pos 0	20.50	1	18.24	20.50	2	17.21			
	3 MHz	23025	700.5	1RB Low	1 Pos 0	20.50	0	19.42	20.50	1	18.48
				1RB Mid	1 Pos 7	20.50	0	19.27	20.50	1	18.57
				1RB High	1 Pos 14	20.50	0	19.29	20.50	1	18.58
				50% RB Low	8 Pos 0	20.50	1	18.23	20.50	2	17.27
				50% RB Mid	8 Pos 4	20.50	1	18.23	20.50	2	17.26
				50% RB High	8 Pos 7	20.50	1	18.23	20.50	2	17.23
		100% RB	15 Pos 0	20.50	1	18.24	20.50	2	17.23		
		23095	707.5	1RB Low	1 Pos 0	20.50	0	19.29	20.50	1	18.58
				1RB Mid	1 Pos 7	20.50	0	19.25	20.50	1	18.58
				1RB High	1 Pos 14	20.50	0	19.19	20.50	1	18.56
				50% RB Low	8 Pos 0	20.50	1	18.20	20.50	2	17.20
				50% RB Mid	8 Pos 4	20.50	1	18.24	20.50	2	17.22
				50% RB High	8 Pos 7	20.50	1	18.21	20.50	2	17.18
		100% RB	15 Pos 0	20.50	1	18.20	20.50	2	17.18		
		23165	714.5	1RB Low	1 Pos 0	20.50	0	19.22	20.50	1	18.50
				1RB Mid	1 Pos 7	20.50	0	19.16	20.50	1	18.48
				1RB High	1 Pos 14	20.50	0	19.15	20.50	1	18.51
				50% RB Low	8 Pos 0	20.50	1	18.18	20.50	2	17.17
				50% RB Mid	8 Pos 4	20.50	1	18.16	20.50	2	17.19
				50% RB High	8 Pos 7	20.50	1	18.15	20.50	2	17.16
100% RB		15 Pos 0	20.50	1	18.16	20.50	2	17.15			

B.2.2.10 LTE Band 13 FDD – Laptop Mode – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 13	10 MHz	23230	782	1RB Low	1 Pos 0	25.00	0	24.22	25.00	1	23.47
				1RB Mid	1 Pos 24	25.00	0	24.33	25.00	1	23.58
				1RB High	1 Pos 49	25.00	0	24.28	25.00	1	23.57
				50% RB Low	25 Pos 0	25.00	1	23.18	25.00	2	22.25
				50% RB Mid	25 Pos 12	25.00	1	23.27	25.00	2	22.34
				50% RB High	25 Pos 24	25.00	1	23.30	25.00	2	22.38
	5.0 MHz	23230	782	100% RB	50 Pos 0	25.00	1	23.29	25.00	2	22.30
				1RB Low	1 Pos 0	25.00	0	24.36	25.00	1	23.50
				1RB Mid	1 Pos 12	25.00	0	24.41	25.00	1	23.55
				1RB High	1 Pos 24	25.00	0	24.40	25.00	1	23.51
				50% RB Low	12 Pos 0	25.00	1	23.24	25.00	2	22.26
				50% RB Mid	12 Pos 6	25.00	1	23.27	25.00	2	22.21
				50% RB High	12 Pos 11	25.00	1	23.28	25.00	2	22.27
				100% RB	25 Pos 0	25.00	1	23.26	25.00	2	22.29

B.2.2.11 LTE Band 13 FDD – Tablet Mode – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 13	10 MHz	23230	782	1RB Low	1 Pos 0	23.00	0	22.19	23.00	1	21.48
				1RB Mid	1 Pos 24	23.00	0	22.25	23.00	1	21.57
				1RB High	1 Pos 49	23.00	0	22.23	23.00	1	21.52
				50% RB Low	25 Pos 0	23.00	1	21.15	23.00	2	20.22
				50% RB Mid	25 Pos 12	23.00	1	21.24	23.00	2	20.30
				50% RB High	25 Pos 24	23.00	1	21.26	23.00	2	20.33
	5.0 MHz	23230	782	100% RB	50 Pos 0	23.00	1	21.32	23.00	2	20.24
				1RB Low	1 Pos 0	23.00	0	22.28	23.00	1	21.54
				1RB Mid	1 Pos 12	23.00	0	22.31	23.00	1	21.57
				1RB High	1 Pos 24	23.00	0	22.28	23.00	1	21.57
				50% RB Low	12 Pos 0	23.00	1	21.24	23.00	2	20.22
				50% RB Mid	12 Pos 6	23.00	1	21.20	23.00	2	20.21
				50% RB High	12 Pos 11	23.00	1	21.29	23.00	2	20.19
				100% RB	25 Pos 0	23.00	1	21.26	23.00	2	20.24

B.2.2.12 LTE Band 14 FDD – Laptop Mode – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 14	10 MHz	23330	793	1RB Low	1 Pos 0	25.00	0	24.26	25.00	1	23.52
				1RB Mid	1 Pos 24	25.00	0	24.31	25.00	1	23.58
				1RB High	1 Pos 49	25.00	0	24.24	25.00	1	23.53
				50% RB Low	25 Pos 0	25.00	1	23.24	25.00	2	22.30
				50% RB Mid	25 Pos 12	25.00	1	23.26	25.00	2	22.34
				50% RB High	25 Pos 24	25.00	1	23.29	25.00	2	22.41
	100% RB	50 Pos 0	25.00	1	23.28	25.00	2	22.26			
	5.0 MHz	23330	793	1RB Low	1 Pos 0	25.00	0	24.29	25.00	1	23.54
				1RB Mid	1 Pos 12	25.00	0	24.27	25.00	1	23.50
				1RB High	1 Pos 24	25.00	0	24.23	25.00	1	23.45
				50% RB Low	12 Pos 0	25.00	1	23.28	25.00	2	22.25
				50% RB Mid	12 Pos 6	25.00	1	23.21	25.00	2	22.25
				50% RB High	12 Pos 11	25.00	1	23.18	25.00	2	22.27
				100% RB	25 Pos 0	25.00	1	23.25	25.00	2	22.26

B.2.2.13 LTE Band 14 FDD – Tablet Mode – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 14	10 MHz	23330	793	1RB Low	1 Pos 0	23.00	0	22.22	23.00	1	21.51
				1RB Mid	1 Pos 24	23.00	0	22.29	23.00	1	21.53
				1RB High	1 Pos 49	23.00	0	22.18	23.00	1	21.48
				50% RB Low	25 Pos 0	23.00	1	21.20	23.00	2	20.34
				50% RB Mid	25 Pos 12	23.00	1	21.25	23.00	2	20.34
				50% RB High	25 Pos 24	23.00	1	21.27	23.00	2	20.37
	100% RB	50 Pos 0	23.00	1	21.24	23.00	2	20.22			
	5.0 MHz	23330	793	1RB Low	1 Pos 0	23.00	0	22.32	23.00	1	21.57
				1RB Mid	1 Pos 12	23.00	0	22.26	23.00	1	21.50
				1RB High	1 Pos 24	23.00	0	22.23	23.00	1	21.50
				50% RB Low	12 Pos 0	23.00	1	21.28	23.00	2	20.27
				50% RB Mid	12 Pos 6	23.00	1	21.20	23.00	2	20.22
				50% RB High	12 Pos 11	23.00	1	21.21	23.00	2	20.21
				100% RB	25 Pos 0	23.00	1	21.21	23.00	2	20.23

B.2.2.14 LTE Band 17 FDD – Laptop – Antennas 5

SAR Measurement for LTE Band 17 FDD (Frequency range: 704 – 716MHz) is covered by LTE Band 12 FDD (Frequency range: 699 – 716MHz) due to overlapping frequency range, with same or higher maximum tune-up and same bandwidth.

B.2.2.15 LTE Band 17 FDD – Tablet Mode – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 17	10 MHz	23790	710	1RB Low	1 Pos 0	21.50	0	21.28	21.50	1	20.54
				1RB Mid	1 Pos 24	21.50	0	21.25	21.50	1	20.53
				1RB High	1 Pos 49	21.50	0	21.25	21.50	1	20.51
				50% RB Low	25 Pos 0	21.50	1	20.18	21.50	2	19.24
				50% RB Mid	25 Pos 12	21.50	1	20.23	21.50	2	19.29
				50% RB High	25 Pos 24	21.50	1	20.20	21.50	2	19.28
				100% RB	50 Pos 0	21.50	1	20.26	21.50	2	19.21
	5.0 MHz	23790	710	1RB Low	1 Pos 0	21.50	0	21.26	21.50	1	20.53
				1RB Mid	1 Pos 12	21.50	0	21.23	21.50	1	20.48
				1RB High	1 Pos 24	21.50	0	21.24	21.50	1	20.47
				50% RB Low	12 Pos 0	21.50	1	20.23	21.50	2	19.21
				50% RB Mid	12 Pos 6	21.50	1	20.21	21.50	2	19.25
				50% RB High	12 Pos 11	21.50	1	20.16	21.50	2	19.22
				100% RB	25 Pos 0	21.50	1	20.22	21.50	2	19.20

B.2.2.16 LTE Band 25 FDD – Laptop Mode – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 25	20 MHz	26140	1860.0	1RB Low	1 Pos 0	21.00	0	20.12	21.00	1	19.32
				1RB Mid	1 Pos 50	21.00	0	20.22	21.00	1	19.46
				1RB High	1 Pos 99	21.00	0	20.17	21.00	1	19.41
				50% RB Low	50 Pos 0	21.00	1	19.25	21.00	2	18.29
				50% RB Mid	50 Pos 24	21.00	1	19.30	21.00	2	18.30
				50% RB High	50 Pos 50	21.00	1	19.29	21.00	2	18.28
		100% RB	100 Pos 0	21.00	1	19.21	21.00	2	18.20		
		26365	1882.5	1RB Low	1 Pos 0	21.00	0	20.16	21.00	1	18.94
				1RB Mid	1 Pos 50	21.00	0	20.22	21.00	1	19.03
				1RB High	1 Pos 99	21.00	0	20.18	21.00	1	18.98
				50% RB Low	50 Pos 0	21.00	1	19.15	21.00	2	18.14
				50% RB Mid	50 Pos 24	21.00	1	19.26	21.00	2	18.26
				50% RB High	50 Pos 50	21.00	1	19.13	21.00	2	18.13
		100% RB	100 Pos 0	21.00	1	19.19	21.00	2	18.16		
		26590	1905.0	1RB Low	1 Pos 0	21.00	0	20.13	21.00	1	18.97
				1RB Mid	1 Pos 50	21.00	0	20.29	21.00	1	19.16
				1RB High	1 Pos 99	21.00	0	20.24	21.00	1	19.13
				50% RB Low	50 Pos 0	21.00	1	19.31	21.00	2	18.19
	50% RB Mid			50 Pos 24	21.00	1	19.30	21.00	2	18.20	
	50% RB High			50 Pos 50	21.00	1	19.25	21.00	2	18.20	
	100% RB	100 Pos 0	21.00	1	19.27	21.00	2	18.21			
	15 MHz	26115	1857.5	1RB Low	1 Pos 0	21.00	0	20.14	21.00	1	19.43
				1RB Mid	1 Pos 38	21.00	0	20.30	21.00	1	19.57
				1RB High	1 Pos 74	21.00	0	20.13	21.00	1	19.43
				50% RB Low	38 Pos 0	21.00	1	19.19	21.00	2	18.18
				50% RB Mid	38 Pos 19	21.00	1	19.24	21.00	2	18.23
				50% RB High	38 Pos 39	21.00	1	19.19	21.00	2	18.22
		100% RB	75 Pos 0	21.00	1	19.21	21.00	2	18.22		
		26365	1882.5	1RB Low	1 Pos 0	21.00	0	20.22	21.00	1	19.25
				1RB Mid	1 Pos 38	21.00	0	20.24	21.00	1	19.23
				1RB High	1 Pos 74	21.00	0	20.19	21.00	1	19.26
				50% RB Low	38 Pos 0	21.00	1	19.15	21.00	2	18.18
				50% RB Mid	38 Pos 19	21.00	1	19.22	21.00	2	18.20
				50% RB High	38 Pos 39	21.00	1	19.18	21.00	2	18.14
		100% RB	75 Pos 0	21.00	1	19.16	21.00	2	18.14		
		26615	1907.5	1RB Low	1 Pos 0	21.00	0	20.17	21.00	1	19.29
				1RB Mid	1 Pos 38	21.00	0	20.24	21.00	1	19.30
				1RB High	1 Pos 74	21.00	0	20.21	21.00	1	19.32
				50% RB Low	38 Pos 0	21.00	1	19.22	21.00	2	18.27
	50% RB Mid			38 Pos 19	21.00	1	19.22	21.00	2	18.25	
	50% RB High			38 Pos 39	21.00	1	19.16	21.00	2	18.26	
	100% RB	75 Pos 0	21.00	1	19.21	21.00	2	18.21			
	10 MHz	26090	1855.0	1RB Low	1 Pos 0	21.00	0	20.21	21.00	1	19.48
				1RB Mid	1 Pos 24	21.00	0	20.24	21.00	1	19.51
				1RB High	1 Pos 49	21.00	0	20.21	21.00	1	19.51
				50% RB Low	25 Pos 0	21.00	1	19.22	21.00	2	18.31
				50% RB Mid	25 Pos 12	21.00	1	19.26	21.00	2	18.33
				50% RB High	25 Pos 25	21.00	1	19.25	21.00	2	18.31
100% RB		50 Pos 0	21.00	1	19.26	21.00	2	18.27			
26365		1882.5	1RB Low	1 Pos 0	21.00	0	20.25	21.00	1	19.10	
			1RB Mid	1 Pos 24	21.00	0	20.26	21.00	1	19.14	
			1RB High	1 Pos 49	21.00	0	20.29	21.00	1	19.03	
			50% RB Low	25 Pos 0	21.00	1	19.23	21.00	2	18.22	
			50% RB Mid	25 Pos 12	21.00	1	19.18	21.00	2	18.20	
			50% RB High	25 Pos 25	21.00	1	19.20	21.00	2	18.18	
100% RB		50 Pos 0	21.00	1	19.25	21.00	2	18.21			
26640		1910.0	1RB Low	1 Pos 0	21.00	0	20.21	21.00	1	19.26	
			1RB Mid	1 Pos 24	21.00	0	20.26	21.00	1	19.35	
			1RB High	1 Pos 49	21.00	0	20.27	21.00	1	19.35	
			50% RB Low	25 Pos 0	21.00	1	19.23	21.00	2	18.27	
	50% RB Mid		25 Pos 12	21.00	1	19.20	21.00	2	18.26		
	50% RB High		25 Pos 25	21.00	1	19.20	21.00	2	18.27		
100% RB	50 Pos 0	21.00	1	19.25	21.00	2	18.20				

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE25	5 MHz	26065	1852.5	1RB Low	1 Pos 0	21.00	0	20.31	21.00	1	19.53
				1RB Mid	1 Pos 38	21.00	0	20.34	21.00	1	19.58
				1RB High	1 Pos 74	21.00	0	20.26	21.00	1	19.54
				50% RB Low	38 Pos 0	21.00	1	19.25	21.00	2	18.20
				50% RB Mid	38 Pos 19	21.00	1	19.26	21.00	2	18.25
				50% RB High	38 Pos 39	21.00	1	19.30	21.00	2	18.25
		100% RB	75 Pos 0	21.00	1	19.26	21.00	2	18.31		
		26365	1882.5	1RB Low	1 Pos 0	21.00	0	20.18	21.00	1	19.44
				1RB Mid	1 Pos 38	21.00	0	20.20	21.00	1	19.45
				1RB High	1 Pos 74	21.00	0	20.23	21.00	1	19.44
				50% RB Low	38 Pos 0	21.00	1	19.25	21.00	2	18.25
				50% RB Mid	38 Pos 19	21.00	1	19.19	21.00	2	18.26
				50% RB High	38 Pos 39	21.00	1	19.15	21.00	2	18.19
		100% RB	75 Pos 0	21.00	1	19.22	21.00	2	18.22		
		26665	1912.5	1RB Low	1 Pos 0	21.00	0	20.20	21.00	1	19.45
				1RB Mid	1 Pos 38	21.00	0	20.26	21.00	1	19.47
				1RB High	1 Pos 74	21.00	0	20.30	21.00	1	19.47
				50% RB Low	38 Pos 0	21.00	1	19.30	21.00	2	18.27
	50% RB Mid			38 Pos 19	21.00	1	19.28	21.00	2	18.18	
	50% RB High			38 Pos 39	21.00	1	19.28	21.00	2	18.21	
	100% RB	75 Pos 0	21.00	1	19.25	21.00	2	18.25			
	3 MHz	26055	1851.5	1RB Low	1 Pos 0	21.00	0	20.20	21.00	1	19.53
				1RB Mid	1 Pos 24	21.00	0	20.19	21.00	1	19.51
				1RB High	1 Pos 49	21.00	0	20.22	21.00	1	19.57
				50% RB Low	25 Pos 0	21.00	1	19.18	21.00	2	18.22
				50% RB Mid	25 Pos 12	21.00	1	19.22	21.00	2	18.24
				50% RB High	25 Pos 24	21.00	1	19.19	21.00	2	18.26
		100% RB	50 Pos 0	21.00	1	19.19	21.00	2	18.21		
		26365	1882.5	1RB Low	1 Pos 0	21.00	0	20.15	21.00	1	19.46
				1RB Mid	1 Pos 24	21.00	0	20.15	21.00	1	19.45
				1RB High	1 Pos 49	21.00	0	20.08	21.00	1	19.44
				50% RB Low	25 Pos 0	21.00	1	19.15	21.00	2	18.19
				50% RB Mid	25 Pos 12	21.00	1	19.14	21.00	2	18.19
				50% RB High	25 Pos 24	21.00	1	19.13	21.00	2	18.13
		100% RB	50 Pos 0	21.00	1	19.12	21.00	2	18.08		
		26675	1913.5	1RB Low	1 Pos 0	21.00	0	20.21	21.00	1	19.53
				1RB Mid	1 Pos 24	21.00	0	20.21	21.00	1	19.51
				1RB High	1 Pos 49	21.00	0	20.20	21.00	1	19.59
				50% RB Low	25 Pos 0	21.00	1	19.22	21.00	2	18.27
	50% RB Mid			25 Pos 12	21.00	1	19.27	21.00	2	18.29	
	50% RB High			25 Pos 24	21.00	1	19.23	21.00	2	18.24	
	100% RB	50 Pos 0	21.00	1	19.22	21.00	2	18.18			
	1.4 MHz	26047	1850.7	1RB Low	1 Pos 0	21.00	0	20.31	21.00	1	19.25
				1RB Mid	1 Pos 12	21.00	0	20.34	21.00	1	19.32
				1RB High	1 Pos 24	21.00	0	20.30	21.00	1	19.27
				50% RB Low	12 Pos 0	21.00	0	20.23	21.00	1	19.37
				50% RB Mid	12 Pos 6	21.00	0	20.25	21.00	1	19.39
				50% RB High	12 Pos 11	21.00	0	20.22	21.00	1	19.39
		100% RB	25 Pos 0	21.00	1	19.22	21.00	2	18.21		
		26365	1882.5	1RB Low	1 Pos 0	21.00	0	20.17	21.00	1	19.14
				1RB Mid	1 Pos 12	21.00	0	20.27	21.00	1	19.22
				1RB High	1 Pos 24	21.00	0	20.18	21.00	1	19.14
				50% RB Low	12 Pos 0	21.00	0	20.17	21.00	1	19.32
				50% RB Mid	12 Pos 6	21.00	0	20.15	21.00	1	19.31
				50% RB High	12 Pos 11	21.00	0	20.12	21.00	1	19.32
		100% RB	25 Pos 0	21.00	1	19.18	21.00	2	18.17		
		26683	1914.3	1RB Low	1 Pos 0	21.00	0	20.33	21.00	1	19.25
				1RB Mid	1 Pos 12	21.00	0	20.35	21.00	1	19.29
				1RB High	1 Pos 24	21.00	0	20.33	21.00	1	19.22
				50% RB Low	12 Pos 0	21.00	0	20.23	21.00	1	19.41
50% RB Mid	12 Pos 6			21.00	0	20.28	21.00	1	19.41		
50% RB High	12 Pos 11			21.00	0	20.24	21.00	1	19.42		
100% RB	25 Pos 0	21.00	1	19.25	21.00	2	18.28				

B.2.2.17 LTE Band 25 FDD – Tablet Mode – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 25	20 MHz	26140	1860.0	1RB Low	1 Pos 0	18.50	0	18.07	18.50	1	17.24
				1RB Mid	1 Pos 50	18.50	0	18.16	18.50	1	17.39
				1RB High	1 Pos 99	18.50	0	18.11	18.50	1	17.30
				50% RB Low	50 Pos 0	18.50	1	17.16	18.50	2	16.15
				50% RB Mid	50 Pos 24	18.50	1	17.18	18.50	2	16.20
				50% RB High	50 Pos 50	18.50	1	17.15	18.50	2	16.13
		100% RB	100 Pos 0	18.50	1	17.16	18.50	2	16.12		
		26365	1882.5	1RB Low	1 Pos 0	18.50	0	18.09	18.50	1	16.92
				1RB Mid	1 Pos 50	18.50	0	18.14	18.50	1	17.00
				1RB High	1 Pos 99	18.50	0	18.11	18.50	1	16.93
				50% RB Low	50 Pos 0	18.50	1	17.08	18.50	2	16.09
				50% RB Mid	50 Pos 24	18.50	1	17.14	18.50	2	16.16
				50% RB High	50 Pos 50	18.50	1	17.07	18.50	2	16.09
		100% RB	100 Pos 0	18.50	1	17.07	18.50	2	16.04		
		26590	1905.0	1RB Low	1 Pos 0	18.50	0	18.14	18.50	1	16.95
				1RB Mid	1 Pos 50	18.50	0	18.29	18.50	1	17.09
				1RB High	1 Pos 99	18.50	0	18.21	18.50	1	17.05
				50% RB Low	50 Pos 0	18.50	1	17.12	18.50	2	16.07
	50% RB Mid			50 Pos 24	18.50	1	17.21	18.50	2	16.10	
	50% RB High			50 Pos 50	18.50	1	17.10	18.50	2	16.03	
	100% RB	100 Pos 0	18.50	1	17.10	18.50	2	16.09			
	15 MHz	26115	1857.5	1RB Low	1 Pos 0	18.50	0	18.08	18.50	1	17.36
				1RB Mid	1 Pos 38	18.50	0	18.17	18.50	1	17.50
				1RB High	1 Pos 74	18.50	0	18.05	18.50	1	17.37
				50% RB Low	38 Pos 0	18.50	1	17.09	18.50	2	16.10
				50% RB Mid	38 Pos 19	18.50	1	17.15	18.50	2	16.13
				50% RB High	38 Pos 39	18.50	1	17.13	18.50	2	16.08
		100% RB	75 Pos 0	18.50	1	17.12	18.50	2	16.09		
		26365	1882.5	1RB Low	1 Pos 0	18.50	0	18.18	18.50	1	17.15
				1RB Mid	1 Pos 38	18.50	0	18.22	18.50	1	17.16
				1RB High	1 Pos 74	18.50	0	18.12	18.50	1	17.13
				50% RB Low	38 Pos 0	18.50	1	17.10	18.50	2	16.08
				50% RB Mid	38 Pos 19	18.50	1	17.10	18.50	2	16.09
				50% RB High	38 Pos 39	18.50	1	17.08	18.50	2	16.08
		100% RB	75 Pos 0	18.50	1	17.10	18.50	2	16.09		
		26615	1907.5	1RB Low	1 Pos 0	18.50	0	18.14	18.50	1	17.38
				1RB Mid	1 Pos 38	18.50	0	18.21	18.50	1	17.46
				1RB High	1 Pos 74	18.50	0	18.18	18.50	1	17.46
				50% RB Low	38 Pos 0	18.50	1	17.11	18.50	2	16.13
	50% RB Mid			38 Pos 19	18.50	1	17.17	18.50	2	16.13	
	50% RB High			38 Pos 39	18.50	1	17.17	18.50	2	16.13	
	100% RB	75 Pos 0	18.50	1	17.12	18.50	2	16.12			
	10 MHz	26090	1855.0	1RB Low	1 Pos 0	18.50	0	18.16	18.50	1	17.42
				1RB Mid	1 Pos 24	18.50	0	18.21	18.50	1	17.48
				1RB High	1 Pos 49	18.50	0	18.13	18.50	1	17.43
				50% RB Low	25 Pos 0	18.50	1	17.15	18.50	2	16.20
				50% RB Mid	25 Pos 12	18.50	1	17.19	18.50	2	16.24
				50% RB High	25 Pos 25	18.50	1	17.13	18.50	2	16.21
100% RB		50 Pos 0	18.50	1	17.16	18.50	2	16.12			
26365		1882.5	1RB Low	1 Pos 0	18.50	0	18.18	18.50	1	17.04	
			1RB Mid	1 Pos 24	18.50	0	18.23	18.50	1	17.09	
			1RB High	1 Pos 49	18.50	0	18.17	18.50	1	17.00	
			50% RB Low	25 Pos 0	18.50	1	17.12	18.50	2	16.12	
			50% RB Mid	25 Pos 12	18.50	1	17.12	18.50	2	16.16	
			50% RB High	25 Pos 25	18.50	1	17.15	18.50	2	16.14	
100% RB		50 Pos 0	18.50	1	17.17	18.50	2	16.12			
26640		1910.0	1RB Low	1 Pos 0	18.50	0	18.13	18.50	1	17.23	
			1RB Mid	1 Pos 24	18.50	0	18.19	18.50	1	17.28	
			1RB High	1 Pos 49	18.50	0	18.20	18.50	1	17.32	
			50% RB Low	25 Pos 0	18.50	1	17.18	18.50	2	16.21	
	50% RB Mid		25 Pos 12	18.50	1	17.15	18.50	2	16.18		
	50% RB High		25 Pos 25	18.50	1	17.11	18.50	2	16.16		
100% RB	50 Pos 0	18.50	1	17.20	18.50	2	16.14				

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE25	5 MHz	26065	1852.5	1RB Low	1 Pos 0	18.50	0	18.27	18.50	1	17.45
				1RB Mid	1 Pos 38	18.50	0	18.34	18.50	1	17.50
				1RB High	1 Pos 74	18.50	0	18.27	18.50	1	17.48
				50% RB Low	38 Pos 0	18.50	1	17.14	18.50	2	16.10
				50% RB Mid	38 Pos 19	18.50	1	17.15	18.50	2	16.13
				50% RB High	38 Pos 39	18.50	1	17.20	18.50	2	16.14
		100% RB	75 Pos 0	18.50	1	17.17	18.50	2	16.17		
		26365	1882.5	1RB Low	1 Pos 0	18.50	0	18.10	18.50	1	17.35
				1RB Mid	1 Pos 38	18.50	0	18.15	18.50	1	17.38
				1RB High	1 Pos 74	18.50	0	18.11	18.50	1	17.35
				50% RB Low	38 Pos 0	18.50	1	17.14	18.50	2	16.11
				50% RB Mid	38 Pos 19	18.50	1	17.11	18.50	2	16.14
				50% RB High	38 Pos 39	18.50	1	17.08	18.50	2	16.10
		100% RB	75 Pos 0	18.50	1	17.15	18.50	2	16.13		
		26665	1912.5	1RB Low	1 Pos 0	18.50	0	18.23	18.50	1	17.37
				1RB Mid	1 Pos 38	18.50	0	18.24	18.50	1	17.39
				1RB High	1 Pos 74	18.50	0	18.32	18.50	1	17.42
				50% RB Low	38 Pos 0	18.50	1	17.23	18.50	2	16.15
	50% RB Mid			38 Pos 19	18.50	1	17.22	18.50	2	16.14	
	50% RB High			38 Pos 39	18.50	1	17.17	18.50	2	16.09	
	100% RB	75 Pos 0	18.50	1	17.21	18.50	2	16.14			
	3 MHz	26055	1851.5	1RB Low	1 Pos 0	18.50	0	18.13	18.50	1	17.43
				1RB Mid	1 Pos 24	18.50	0	18.16	18.50	1	17.48
				1RB High	1 Pos 49	18.50	0	18.15	18.50	1	17.49
				50% RB Low	25 Pos 0	18.50	1	17.12	18.50	2	16.15
				50% RB Mid	25 Pos 12	18.50	1	17.14	18.50	2	16.16
				50% RB High	25 Pos 24	18.50	1	17.13	18.50	2	16.13
		100% RB	50 Pos 0	18.50	1	17.12	18.50	2	16.08		
		26365	1882.5	1RB Low	1 Pos 0	18.50	0	18.10	18.50	1	17.40
				1RB Mid	1 Pos 24	18.50	0	18.11	18.50	1	17.42
				1RB High	1 Pos 49	18.50	0	18.06	18.50	1	17.38
				50% RB Low	25 Pos 0	18.50	1	17.06	18.50	2	16.09
				50% RB Mid	25 Pos 12	18.50	1	17.06	18.50	2	16.06
				50% RB High	25 Pos 24	18.50	1	17.04	18.50	2	16.03
		100% RB	50 Pos 0	18.50	1	17.06	18.50	2	16.01		
		26675	1913.5	1RB Low	1 Pos 0	18.50	0	18.18	18.50	1	17.46
				1RB Mid	1 Pos 24	18.50	0	18.16	18.50	1	17.46
				1RB High	1 Pos 49	18.50	0	18.15	18.50	1	17.46
				50% RB Low	25 Pos 0	18.50	1	17.14	18.50	2	16.18
	50% RB Mid			25 Pos 12	18.50	1	17.17	18.50	2	16.18	
	50% RB High			25 Pos 24	18.50	1	17.13	18.50	2	16.13	
	100% RB	50 Pos 0	18.50	1	17.15	18.50	2	16.12			
	1.4 MHz	26047	1850.7	1RB Low	1 Pos 0	18.50	0	18.19	18.50	1	17.13
				1RB Mid	1 Pos 12	18.50	0	18.24	18.50	1	17.22
				1RB High	1 Pos 24	18.50	0	18.18	18.50	1	17.14
				50% RB Low	12 Pos 0	18.50	0	18.15	18.50	1	17.32
				50% RB Mid	12 Pos 6	18.50	0	18.15	18.50	1	17.32
				50% RB High	12 Pos 11	18.50	0	18.15	18.50	1	17.33
100% RB		25 Pos 0	18.50	1	17.15	18.50	2	16.16			
26365		1882.5	1RB Low	1 Pos 0	18.50	0	18.12	18.50	1	17.03	
			1RB Mid	1 Pos 12	18.50	0	18.14	18.50	1	17.10	
			1RB High	1 Pos 24	18.50	0	18.14	18.50	1	17.03	
			50% RB Low	12 Pos 0	18.50	0	18.08	18.50	1	17.26	
			50% RB Mid	12 Pos 6	18.50	0	18.07	18.50	1	17.25	
			50% RB High	12 Pos 11	18.50	0	18.02	18.50	1	17.23	
100% RB		25 Pos 0	18.50	1	17.07	18.50	2	16.12			
26683		1914.3	1RB Low	1 Pos 0	18.50	0	18.18	18.50	1	17.14	
			1RB Mid	1 Pos 12	18.50	0	18.24	18.50	1	17.19	
			1RB High	1 Pos 24	18.50	0	18.18	18.50	1	17.16	
			50% RB Low	12 Pos 0	18.50	0	18.14	18.50	1	17.33	
	50% RB Mid		12 Pos 6	18.50	0	18.17	18.50	1	17.31		
	50% RB High		12 Pos 11	18.50	0	18.16	18.50	1	17.36		
100% RB	25 Pos 0	18.50	1	17.16	18.50	2	16.19				

B.2.2.18 LTE Band 25 FDD – Laptop Mode – Antenna 8

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 25	20 MHz	26140	1860.0	1RB Low	1 Pos 0	16.50	0	15.61	16.50	1	14.76
				1RB Mid	1 Pos 50	16.50	0	15.73	16.50	1	14.94
				1RB High	1 Pos 99	16.50	0	15.60	16.50	1	14.84
				50% RB Low	50 Pos 0	16.50	1	14.66	16.50	2	13.66
				50% RB Mid	50 Pos 24	16.50	1	14.78	16.50	2	13.72
				50% RB High	50 Pos 50	16.50	1	14.68	16.50	2	13.65
		100% RB	100 Pos 0	16.50	1	14.69	16.50	2	13.66		
		26365	1882.5	1RB Low	1 Pos 0	16.50	0	15.63	16.50	1	14.80
				1RB Mid	1 Pos 50	16.50	0	15.80	16.50	1	14.88
				1RB High	1 Pos 99	16.50	0	15.62	16.50	1	14.78
				50% RB Low	50 Pos 0	16.50	1	14.59	16.50	2	13.60
				50% RB Mid	50 Pos 24	16.50	1	14.80	16.50	2	13.70
				50% RB High	50 Pos 50	16.50	1	14.71	16.50	2	13.69
		100% RB	100 Pos 0	16.50	1	14.74	16.50	2	13.66		
		26590	1905.0	1RB Low	1 Pos 0	16.50	0	15.55	16.50	1	14.72
				1RB Mid	1 Pos 50	16.50	0	15.91	16.50	1	14.83
				1RB High	1 Pos 99	16.50	0	15.60	16.50	1	14.71
				50% RB Low	50 Pos 0	16.50	1	14.62	16.50	2	13.62
	50% RB Mid			50 Pos 24	16.50	1	14.67	16.50	2	13.69	
	50% RB High			50 Pos 50	16.50	1	14.88	16.50	2	13.49	
	100% RB	100 Pos 0	16.50	1	14.58	16.50	2	13.56			
	15 MHz	26115	1857.5	1RB Low	1 Pos 0	16.50	0	15.64	16.50	1	14.95
				1RB Mid	1 Pos 38	16.50	0	15.68	16.50	1	14.99
				1RB High	1 Pos 74	16.50	0	15.60	16.50	1	14.94
				50% RB Low	38 Pos 0	16.50	1	14.65	16.50	2	13.67
				50% RB Mid	38 Pos 19	16.50	1	14.68	16.50	2	13.69
				50% RB High	38 Pos 39	16.50	1	14.67	16.50	2	13.66
		100% RB	75 Pos 0	16.50	1	14.69	16.50	2	13.71		
		26365	1882.5	1RB Low	1 Pos 0	16.50	0	15.63	16.50	1	14.94
				1RB Mid	1 Pos 38	16.50	0	15.69	16.50	1	14.98
				1RB High	1 Pos 74	16.50	0	15.62	16.50	1	14.95
				50% RB Low	38 Pos 0	16.50	1	14.67	16.50	2	13.66
				50% RB Mid	38 Pos 19	16.50	1	14.73	16.50	2	13.73
				50% RB High	38 Pos 39	16.50	1	14.67	16.50	2	13.68
		100% RB	75 Pos 0	16.50	1	14.68	16.50	2	13.71		
		26615	1907.5	1RB Low	1 Pos 0	16.50	0	15.58	16.50	1	14.87
				1RB Mid	1 Pos 38	16.50	0	15.70	16.50	1	14.92
				1RB High	1 Pos 74	16.50	0	15.56	16.50	1	14.87
				50% RB Low	38 Pos 0	16.50	1	14.58	16.50	2	13.61
	50% RB Mid			38 Pos 19	16.50	1	14.61	16.50	2	13.62	
	50% RB High			38 Pos 39	16.50	1	14.56	16.50	2	13.51	
	100% RB	75 Pos 0	16.50	1	14.59	16.50	2	13.58			
	10 MHz	26090	1855.0	1RB Low	1 Pos 0	16.50	0	15.68	16.50	1	14.99
				1RB Mid	1 Pos 24	16.50	0	15.67	16.50	1	14.98
				1RB High	1 Pos 49	16.50	0	15.67	16.50	1	15.02
				50% RB Low	25 Pos 0	16.50	1	14.66	16.50	2	13.72
				50% RB Mid	25 Pos 12	16.50	1	14.67	16.50	2	13.77
				50% RB High	25 Pos 25	16.50	1	14.71	16.50	2	13.76
100% RB		50 Pos 0	16.50	1	14.73	16.50	2	13.71			
26365		1882.5	1RB Low	1 Pos 0	16.50	0	15.68	16.50	1	14.97	
			1RB Mid	1 Pos 24	16.50	0	15.72	16.50	1	15.00	
			1RB High	1 Pos 49	16.50	0	15.68	16.50	1	14.99	
			50% RB Low	25 Pos 0	16.50	1	14.68	16.50	2	13.76	
			50% RB Mid	25 Pos 12	16.50	1	14.73	16.50	2	13.81	
			50% RB High	25 Pos 25	16.50	1	14.77	16.50	2	13.84	
100% RB		50 Pos 0	16.50	1	14.76	16.50	2	13.74			
26640		1910.0	1RB Low	1 Pos 0	16.50	0	15.68	16.50	1	14.94	
			1RB Mid	1 Pos 24	16.50	0	15.70	16.50	1	14.95	
			1RB High	1 Pos 49	16.50	0	15.60	16.50	1	14.91	
			50% RB Low	25 Pos 0	16.50	1	14.71	16.50	2	13.77	
	50% RB Mid		25 Pos 12	16.50	1	14.65	16.50	2	13.70		
	50% RB High		25 Pos 25	16.50	1	14.59	16.50	2	13.59		
100% RB	50 Pos 0	16.50	1	14.65	16.50	2	13.62				

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE25	5 MHz	26065	1852.5	1RB Low	1 Pos 0	16.50	0	15.82	16.50	1	15.02
				1RB Mid	1 Pos 38	16.50	0	15.81	16.50	1	14.96
				1RB High	1 Pos 74	16.50	0	15.76	16.50	1	14.97
				50% RB Low	38 Pos 0	16.50	1	14.70	16.50	2	13.62
				50% RB Mid	38 Pos 19	16.50	1	14.66	16.50	2	13.65
				50% RB High	38 Pos 39	16.50	1	14.71	16.50	2	13.66
		100% RB	75 Pos 0	16.50	1	14.73	16.50	2	13.72		
		26365	1882.5	1RB Low	1 Pos 0	16.50	0	15.77	16.50	1	14.95
				1RB Mid	1 Pos 38	16.50	0	15.79	16.50	1	14.93
				1RB High	1 Pos 74	16.50	0	15.82	16.50	1	14.91
				50% RB Low	38 Pos 0	16.50	1	14.70	16.50	2	13.66
				50% RB Mid	38 Pos 19	16.50	1	14.71	16.50	2	13.65
				50% RB High	38 Pos 39	16.50	1	14.68	16.50	2	13.64
		100% RB	75 Pos 0	16.50	1	14.74	16.50	2	13.77		
		26665	1912.5	1RB Low	1 Pos 0	16.50	0	15.75	16.50	1	14.89
				1RB Mid	1 Pos 38	16.50	0	15.73	16.50	1	14.88
				1RB High	1 Pos 74	16.50	0	15.78	16.50	1	14.90
				50% RB Low	38 Pos 0	16.50	1	14.67	16.50	2	13.68
	50% RB Mid			38 Pos 19	16.50	1	14.69	16.50	2	13.62	
	50% RB High			38 Pos 39	16.50	1	14.63	16.50	2	13.57	
	100% RB	75 Pos 0	16.50	1	14.71	16.50	2	13.70			
	3 MHz	26055	1851.5	1RB Low	1 Pos 0	16.50	0	15.70	16.50	1	15.01
				1RB Mid	1 Pos 24	16.50	0	15.69	16.50	1	14.99
				1RB High	1 Pos 49	16.50	0	15.63	16.50	1	14.97
				50% RB Low	25 Pos 0	16.50	1	14.64	16.50	2	13.69
				50% RB Mid	25 Pos 12	16.50	1	14.68	16.50	2	13.68
				50% RB High	25 Pos 24	16.50	1	14.69	16.50	2	13.67
		100% RB	50 Pos 0	16.50	1	14.68	16.50	2	13.66		
		26365	1882.5	1RB Low	1 Pos 0	16.50	0	15.65	16.50	1	14.99
				1RB Mid	1 Pos 24	16.50	0	15.69	16.50	1	14.99
				1RB High	1 Pos 49	16.50	0	15.62	16.50	1	14.95
				50% RB Low	25 Pos 0	16.50	1	14.66	16.50	2	13.69
				50% RB Mid	25 Pos 12	16.50	1	14.63	16.50	2	13.66
				50% RB High	25 Pos 24	16.50	1	14.60	16.50	2	13.66
		100% RB	50 Pos 0	16.50	1	14.67	16.50	2	13.62		
		26675	1913.5	1RB Low	1 Pos 0	16.50	0	15.62	16.50	1	14.95
				1RB Mid	1 Pos 24	16.50	0	15.64	16.50	1	14.95
				1RB High	1 Pos 49	16.50	0	15.58	16.50	1	14.94
				50% RB Low	25 Pos 0	16.50	1	14.62	16.50	2	13.66
	50% RB Mid			25 Pos 12	16.50	1	14.59	16.50	2	13.68	
	50% RB High			25 Pos 24	16.50	1	14.60	16.50	2	13.61	
	100% RB	50 Pos 0	16.50	1	14.62	16.50	2	13.61			
	1.4 MHz	26047	1850.7	1RB Low	1 Pos 0	16.50	0	15.64	16.50	1	14.63
				1RB Mid	1 Pos 12	16.50	0	15.68	16.50	1	14.74
				1RB High	1 Pos 24	16.50	0	15.61	16.50	1	14.64
				50% RB Low	12 Pos 0	16.50	0	15.58	16.50	1	14.85
				50% RB Mid	12 Pos 6	16.50	0	15.60	16.50	1	14.84
				50% RB High	12 Pos 11	16.50	0	15.61	16.50	1	14.85
100% RB		25 Pos 0	16.50	1	14.65	16.50	2	13.65			
26365		1882.5	1RB Low	1 Pos 0	16.50	0	15.64	16.50	1	14.61	
			1RB Mid	1 Pos 12	16.50	0	15.66	16.50	1	14.66	
			1RB High	1 Pos 24	16.50	0	15.62	16.50	1	14.60	
			50% RB Low	12 Pos 0	16.50	0	15.59	16.50	1	14.83	
			50% RB Mid	12 Pos 6	16.50	0	15.61	16.50	1	14.84	
			50% RB High	12 Pos 11	16.50	0	15.56	16.50	1	14.81	
100% RB		25 Pos 0	16.50	1	14.72	16.50	2	13.74			
26683		1914.3	1RB Low	1 Pos 0	16.50	0	15.60	16.50	1	14.58	
			1RB Mid	1 Pos 12	16.50	0	15.67	16.50	1	14.65	
			1RB High	1 Pos 24	16.50	0	15.59	16.50	1	14.59	
			50% RB Low	12 Pos 0	16.50	0	15.57	16.50	1	14.80	
	50% RB Mid		12 Pos 6	16.50	0	15.58	16.50	1	14.79		
	50% RB High		12 Pos 11	16.50	0	15.57	16.50	1	14.82		
100% RB	25 Pos 0	16.50	1	14.63	16.50	2	13.68				

B.2.2.19 LTE Band 25 FDD – Tablet Mode – Antenna 8

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 25	20 MHz	26140	1860.0	1RB Low	1 Pos 0	14.50	0	13.68	14.50	1	12.96
				1RB Mid	1 Pos 50	14.50	0	14.16	14.50	1	13.09
				1RB High	1 Pos 99	14.50	0	13.76	14.50	1	13.01
				50% RB Low	50 Pos 0	14.50	1	12.73	14.50	2	11.72
				50% RB Mid	50 Pos 24	14.50	1	13.18	14.50	2	11.76
				50% RB High	50 Pos 50	14.50	1	12.80	14.50	2	11.78
		100% RB	100 Pos 0	14.50	1	12.77	14.50	2	11.78		
		26365	1882.5	1RB Low	1 Pos 0	14.50	0	13.70	14.50	1	12.97
				1RB Mid	1 Pos 50	14.50	0	14.14	14.50	1	13.06
				1RB High	1 Pos 99	14.50	0	13.75	14.50	1	13.02
				50% RB Low	50 Pos 0	14.50	1	12.74	14.50	2	11.70
				50% RB Mid	50 Pos 24	14.50	1	13.14	14.50	2	11.75
				50% RB High	50 Pos 50	14.50	1	12.72	14.50	2	11.71
		100% RB	100 Pos 0	14.50	1	13.07	14.50	2	11.70		
		26590	1905.0	1RB Low	1 Pos 0	14.50	0	13.75	14.50	1	13.01
				1RB Mid	1 Pos 50	14.50	0	14.29	14.50	1	13.17
				1RB High	1 Pos 99	14.50	0	13.92	14.50	1	13.14
				50% RB Low	50 Pos 0	14.50	1	12.87	14.50	2	11.83
	50% RB Mid			50 Pos 24	14.50	1	13.21	14.50	2	11.84	
	50% RB High			50 Pos 50	14.50	1	12.80	14.50	2	11.75	
	100% RB	100 Pos 0	14.50	1	12.81	14.50	2	11.83			
	15 MHz	26115	1857.5	1RB Low	1 Pos 0	14.50	0	13.64	14.50	1	13.25
				1RB Mid	1 Pos 38	14.50	0	13.74	14.50	1	13.38
				1RB High	1 Pos 74	14.50	0	13.64	14.50	1	13.28
				50% RB Low	38 Pos 0	14.50	1	12.67	14.50	2	11.72
				50% RB Mid	38 Pos 19	14.50	1	12.74	14.50	2	11.74
				50% RB High	38 Pos 39	14.50	1	12.77	14.50	2	11.75
		100% RB	75 Pos 0	14.50	1	12.74	14.50	2	11.75		
		26365	1882.5	1RB Low	1 Pos 0	14.50	0	13.63	14.50	1	13.27
				1RB Mid	1 Pos 38	14.50	0	13.73	14.50	1	13.31
				1RB High	1 Pos 74	14.50	0	13.68	14.50	1	13.25
				50% RB Low	38 Pos 0	14.50	1	12.74	14.50	2	11.75
				50% RB Mid	38 Pos 19	14.50	1	12.74	14.50	2	11.76
				50% RB High	38 Pos 39	14.50	1	12.70	14.50	2	11.73
		100% RB	75 Pos 0	14.50	1	12.73	14.50	2	11.73		
		26615	1907.5	1RB Low	1 Pos 0	14.50	0	13.69	14.50	1	13.34
				1RB Mid	1 Pos 38	14.50	0	13.82	14.50	1	13.36
				1RB High	1 Pos 74	14.50	0	13.83	14.50	1	13.45
				50% RB Low	38 Pos 0	14.50	1	12.82	14.50	2	11.82
	50% RB Mid			38 Pos 19	14.50	1	12.85	14.50	2	11.83	
	50% RB High			38 Pos 39	14.50	1	12.83	14.50	2	11.83	
	100% RB	75 Pos 0	14.50	1	12.80	14.50	2	11.81			
	10 MHz	26090	1855.0	1RB Low	1 Pos 0	14.50	0	13.71	14.50	1	13.30
				1RB Mid	1 Pos 24	14.50	0	13.74	14.50	1	13.33
				1RB High	1 Pos 49	14.50	0	13.71	14.50	1	13.30
				50% RB Low	25 Pos 0	14.50	1	12.73	14.50	2	11.82
				50% RB Mid	25 Pos 12	14.50	1	12.77	14.50	2	11.81
				50% RB High	25 Pos 25	14.50	1	12.75	14.50	2	11.81
100% RB		50 Pos 0	14.50	1	12.79	14.50	2	11.76			
26365		1882.5	1RB Low	1 Pos 0	14.50	0	13.75	14.50	1	13.29	
			1RB Mid	1 Pos 24	14.50	0	13.76	14.50	1	13.31	
			1RB High	1 Pos 49	14.50	0	13.75	14.50	1	13.29	
			50% RB Low	25 Pos 0	14.50	1	12.79	14.50	2	11.82	
			50% RB Mid	25 Pos 12	14.50	1	12.78	14.50	2	11.82	
			50% RB High	25 Pos 25	14.50	1	12.78	14.50	2	11.82	
100% RB		50 Pos 0	14.50	1	12.82	14.50	2	11.80			
26640		1910.0	1RB Low	1 Pos 0	14.50	0	13.81	14.50	1	13.35	
			1RB Mid	1 Pos 24	14.50	0	13.86	14.50	1	13.40	
			1RB High	1 Pos 49	14.50	0	13.89	14.50	1	13.45	
			50% RB Low	25 Pos 0	14.50	1	12.93	14.50	2	11.98	
	50% RB Mid		25 Pos 12	14.50	1	12.88	14.50	2	11.95		
	50% RB High		25 Pos 25	14.50	1	12.86	14.50	2	11.89		
100% RB	50 Pos 0	14.50	1	12.88	14.50	2	11.90				

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE25	5 MHz	26065	1852.5	1RB Low	1 Pos 0	14.50	0	13.79	14.50	1	12.66
				1RB Mid	1 Pos 38	14.50	0	13.92	14.50	1	12.75
				1RB High	1 Pos 74	14.50	0	13.83	14.50	1	12.67
				50% RB Low	38 Pos 0	14.50	1	12.72	14.50	2	11.74
				50% RB Mid	38 Pos 19	14.50	1	12.71	14.50	2	11.76
				50% RB High	38 Pos 39	14.50	1	12.74	14.50	2	11.78
		100% RB	75 Pos 0	14.50	1	12.74	14.50	2	11.82		
		26365	1882.5	1RB Low	1 Pos 0	14.50	0	13.84	14.50	1	12.68
				1RB Mid	1 Pos 38	14.50	0	13.88	14.50	1	12.69
				1RB High	1 Pos 74	14.50	0	13.83	14.50	1	12.67
				50% RB Low	38 Pos 0	14.50	1	12.73	14.50	2	11.75
				50% RB Mid	38 Pos 19	14.50	1	12.71	14.50	2	11.74
				50% RB High	38 Pos 39	14.50	1	12.70	14.50	2	11.71
		100% RB	75 Pos 0	14.50	1	12.75	14.50	2	11.82		
		26665	1912.5	1RB Low	1 Pos 0	14.50	0	13.95	14.50	1	12.78
				1RB Mid	1 Pos 38	14.50	0	14.03	14.50	1	12.83
				1RB High	1 Pos 74	14.50	0	14.03	14.50	1	12.84
				50% RB Low	38 Pos 0	14.50	1	12.86	14.50	2	11.94
	50% RB Mid			38 Pos 19	14.50	1	12.84	14.50	2	11.91	
	50% RB High			38 Pos 39	14.50	1	12.84	14.50	2	11.88	
	100% RB	75 Pos 0	14.50	1	12.89	14.50	2	11.98			
	3 MHz	26055	1851.5	1RB Low	1 Pos 0	14.50	0	13.71	14.50	1	13.27
				1RB Mid	1 Pos 24	14.50	0	13.67	14.50	1	13.29
				1RB High	1 Pos 49	14.50	0	13.70	14.50	1	13.32
				50% RB Low	25 Pos 0	14.50	1	12.65	14.50	2	11.91
				50% RB Mid	25 Pos 12	14.50	1	12.68	14.50	2	11.91
				50% RB High	25 Pos 24	14.50	1	12.69	14.50	2	11.90
		100% RB	50 Pos 0	14.50	1	12.69	14.50	2	11.77		
		26365	1882.5	1RB Low	1 Pos 0	14.50	0	13.72	14.50	1	13.26
				1RB Mid	1 Pos 24	14.50	0	13.70	14.50	1	13.27
				1RB High	1 Pos 49	14.50	0	13.67	14.50	1	13.24
				50% RB Low	25 Pos 0	14.50	1	12.67	14.50	2	11.92
				50% RB Mid	25 Pos 12	14.50	1	12.64	14.50	2	11.88
				50% RB High	25 Pos 24	14.50	1	12.65	14.50	2	11.87
		100% RB	50 Pos 0	14.50	1	12.68	14.50	2	11.76		
		26675	1913.5	1RB Low	1 Pos 0	14.50	0	13.83	14.50	1	13.41
				1RB Mid	1 Pos 24	14.50	0	13.84	14.50	1	13.39
				1RB High	1 Pos 49	14.50	0	13.82	14.50	1	13.41
				50% RB Low	25 Pos 0	14.50	1	12.81	14.50	2	12.06
	50% RB Mid			25 Pos 12	14.50	1	12.85	14.50	2	12.11	
	50% RB High			25 Pos 24	14.50	1	12.83	14.50	2	12.09	
	100% RB	50 Pos 0	14.50	1	12.87	14.50	2	11.97			
	1.4 MHz	26047	1850.7	1RB Low	1 Pos 0	14.50	0	13.72	14.50	1	12.74
				1RB Mid	1 Pos 12	14.50	0	13.74	14.50	1	12.75
				1RB High	1 Pos 24	14.50	0	13.74	14.50	1	12.71
				50% RB Low	12 Pos 0	14.50	0	13.76	14.50	1	12.92
				50% RB Mid	12 Pos 6	14.50	0	13.79	14.50	1	12.93
				50% RB High	12 Pos 11	14.50	0	13.79	14.50	1	12.97
		100% RB	25 Pos 0	14.50	1	12.72	14.50	2	11.73		
		26365	1882.5	1RB Low	1 Pos 0	14.50	0	13.69	14.50	1	12.69
				1RB Mid	1 Pos 12	14.50	0	13.70	14.50	1	12.74
				1RB High	1 Pos 24	14.50	0	13.73	14.50	1	12.71
				50% RB Low	12 Pos 0	14.50	0	13.75	14.50	1	12.90
				50% RB Mid	12 Pos 6	14.50	0	13.74	14.50	1	12.91
				50% RB High	12 Pos 11	14.50	0	13.72	14.50	1	12.91
		100% RB	25 Pos 0	14.50	1	12.68	14.50	2	11.71		
		26683	1914.3	1RB Low	1 Pos 0	14.50	0	13.85	14.50	1	12.87
				1RB Mid	1 Pos 12	14.50	0	13.87	14.50	1	12.89
				1RB High	1 Pos 24	14.50	0	13.88	14.50	1	12.87
				50% RB Low	12 Pos 0	14.50	0	13.92	14.50	1	13.05
50% RB Mid	12 Pos 6			14.50	0	13.94	14.50	1	13.07		
50% RB High	12 Pos 11			14.50	0	13.91	14.50	1	13.10		
100% RB	25 Pos 0	14.50	1	12.85	14.50	2	11.87				

B.2.2.20 LTE Band 26 FDD – Laptop Mode – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE26	15 MHz	26775	821.5	1RB Low	1 Pos 0	25.00	0	24.29	25.00	1	23.57
				1RB Mid	1 Pos 38	25.00	0	24.37	25.00	1	23.64
				1RB High	1 Pos 74	25.00	0	24.27	25.00	1	23.51
				50% RB Low	38 Pos 0	25.00	1	23.32	25.00	2	22.38
				50% RB Mid	38 Pos 19	25.00	1	23.34	25.00	2	22.33
				50% RB High	38 Pos 39	25.00	1	23.33	25.00	2	22.32
		100% RB	75 Pos 0	25.00	1	23.30	25.00	2	22.32		
		26865	831.5	1RB Low	1 Pos 0	25.00	0	24.32	25.00	1	23.33
				1RB Mid	1 Pos 38	25.00	0	24.38	25.00	1	23.39
				1RB High	1 Pos 74	25.00	0	24.35	25.00	1	23.34
				50% RB Low	38 Pos 0	25.00	1	23.26	25.00	2	22.26
				50% RB Mid	38 Pos 19	25.00	1	23.33	25.00	2	22.31
				50% RB High	38 Pos 39	25.00	1	23.27	25.00	2	22.25
		100% RB	75 Pos 0	25.00	1	23.29	25.00	2	22.27		
		26965	841.5	1RB Low	1 Pos 0	25.00	0	24.10	25.00	1	23.38
				1RB Mid	1 Pos 38	25.00	0	24.10	25.00	1	23.37
				1RB High	1 Pos 74	25.00	0	24.00	25.00	1	23.41
				50% RB Low	38 Pos 0	25.00	1	23.40	25.00	2	22.41
	50% RB Mid			38 Pos 19	25.00	1	23.35	25.00	2	22.35	
	50% RB High			38 Pos 39	25.00	1	23.32	25.00	2	22.36	
	100% RB	75 Pos 0	25.00	1	23.33	25.00	2	22.32			
	10 MHz	26750	820	1RB Low	1 Pos 0	25.00	0	24.45	25.00	1	23.66
				1RB Mid	1 Pos 24	25.00	0	24.47	25.00	1	23.70
				1RB High	1 Pos 49	25.00	0	24.42	25.00	1	23.63
				50% RB Low	25 Pos 0	25.00	1	23.37	25.00	2	22.42
				50% RB Mid	25 Pos 12	25.00	1	23.40	25.00	2	22.48
				50% RB High	25 Pos 24	25.00	1	23.37	25.00	2	22.45
		100% RB	50 Pos 0	25.00	1	23.39	25.00	2	22.39		
		26865	831.5	1RB Low	1 Pos 0	25.00	0	24.34	25.00	1	23.17
				1RB Mid	1 Pos 24	25.00	0	24.43	25.00	1	23.26
				1RB High	1 Pos 49	25.00	0	24.39	25.00	1	23.26
				50% RB Low	25 Pos 0	25.00	1	23.30	25.00	2	22.35
				50% RB Mid	25 Pos 12	25.00	1	23.36	25.00	2	22.34
				50% RB High	25 Pos 24	25.00	1	23.30	25.00	2	22.32
		100% RB	50 Pos 0	25.00	1	23.32	25.00	2	22.33		
		26990	844	1RB Low	1 Pos 0	25.00	0	24.33	25.00	1	23.50
				1RB Mid	1 Pos 24	25.00	0	24.33	25.00	1	23.54
				1RB High	1 Pos 49	25.00	0	24.32	25.00	1	23.46
				50% RB Low	25 Pos 0	25.00	1	23.34	25.00	2	22.37
	50% RB Mid			25 Pos 12	25.00	1	23.36	25.00	2	22.39	
	50% RB High			25 Pos 24	25.00	1	23.30	25.00	2	22.33	
	100% RB	50 Pos 0	25.00	1	23.38	25.00	2	22.33			
	5.0 MHz	26715	816.5	1RB Low	1 Pos 0	25.00	0	24.52	25.00	1	23.57
				1RB Mid	1 Pos 12	25.00	0	24.51	25.00	1	23.59
				1RB High	1 Pos 24	25.00	0	24.54	25.00	1	23.63
				50% RB Low	12 Pos 0	25.00	1	23.35	25.00	2	22.34
				50% RB Mid	12 Pos 6	25.00	1	23.33	25.00	2	22.33
				50% RB High	12 Pos 11	25.00	1	23.36	25.00	2	22.30
100% RB		25 Pos 0	25.00	1	23.36	25.00	2	22.38			
26865		831.5	1RB Low	1 Pos 0	25.00	0	24.32	25.00	1	23.55	
			1RB Mid	1 Pos 12	25.00	0	24.35	25.00	1	23.60	
			1RB High	1 Pos 24	25.00	0	24.34	25.00	1	23.60	
			50% RB Low	12 Pos 0	25.00	1	23.34	25.00	2	22.34	
			50% RB Mid	12 Pos 6	25.00	1	23.29	25.00	2	22.34	
			50% RB High	12 Pos 11	25.00	1	23.29	25.00	2	22.38	
100% RB		25 Pos 0	25.00	1	23.33	25.00	2	22.34			
27015		846.5	1RB Low	1 Pos 0	25.00	0	24.47	25.00	1	23.57	
			1RB Mid	1 Pos 12	25.00	0	24.49	25.00	1	23.56	
			1RB High	1 Pos 24	25.00	0	24.51	25.00	1	23.61	
			50% RB Low	12 Pos 0	25.00	1	23.39	25.00	2	22.34	
	50% RB Mid		12 Pos 6	25.00	1	23.38	25.00	2	22.31		
	50% RB High		12 Pos 11	25.00	1	23.33	25.00	2	22.25		
100% RB	25 Pos 0	25.00	1	23.38	25.00	2	22.32				

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM				
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)		
LTE26	3.0 MHz	26705	815.5	1RB Low	1 Pos 0	25.00	0	24.41	25.00	1	23.65		
				1RB Mid	1 Pos 7	25.00	0	24.41	25.00	1	23.66		
				1RB High	1 Pos 14	25.00	0	24.42	25.00	1	23.65		
				50% RB Low	8 Pos 0	25.00	1	23.32	25.00	2	22.34		
				50% RB Mid	8 Pos 4	25.00	1	23.31	25.00	2	22.33		
				50% RB High	8 Pos 7	25.00	1	23.38	25.00	2	22.38		
		100% RB	15 Pos 0	25.00	1	23.30	25.00	2	22.26				
		26865	831.5	1RB Low	1 Pos 0	25.00	0	24.32	25.00	1	23.62		
				1RB Mid	1 Pos 7	25.00	0	24.30	25.00	1	23.60		
				1RB High	1 Pos 14	25.00	0	24.27	25.00	1	23.61		
				50% RB Low	8 Pos 0	25.00	1	23.29	25.00	2	22.30		
				50% RB Mid	8 Pos 4	25.00	1	23.26	25.00	2	22.34		
				50% RB High	8 Pos 7	25.00	1	23.33	25.00	2	22.36		
		100% RB	15 Pos 0	25.00	1	23.32	25.00	2	22.28				
		27025	847.5	1RB Low	1 Pos 0	25.00	0	24.36	25.00	1	23.66		
				1RB Mid	1 Pos 7	25.00	0	24.38	25.00	1	23.62		
				1RB High	1 Pos 14	25.00	0	24.37	25.00	1	23.61		
				50% RB Low	8 Pos 0	25.00	1	23.33	25.00	2	22.40		
				50% RB Mid	8 Pos 4	25.00	1	23.32	25.00	2	22.37		
				50% RB High	8 Pos 7	25.00	1	23.30	25.00	2	22.39		
		100% RB	15 Pos 0	25.00	1	23.33	25.00	2	22.29				
		1.4 MHz	26697	814.7	1RB Low	1 Pos 0	25.00	0	24.25	25.00	1	23.19	
					1RB Mid	1 Pos 2	25.00	0	24.28	25.00	1	23.22	
					1RB High	1 Pos 5	25.00	0	24.20	25.00	1	23.15	
	50% RB Low				3 Pos 0	25.00	0	24.19	25.00	1	23.35		
	50% RB Mid				3 Pos 1	25.00	0	24.19	25.00	1	23.36		
	50% RB High				3 Pos 2	25.00	0	24.18	25.00	1	23.39		
	100% RB				6 Pos 0	25.00	1	23.16	25.00	2	22.21		
	26865				831.5	1RB Low	1 Pos 0	25.00	0	24.25	25.00	1	23.19
						1RB Mid	1 Pos 2	25.00	0	24.29	25.00	1	23.26
						1RB High	1 Pos 5	25.00	0	24.23	25.00	1	23.16
						50% RB Low	3 Pos 0	25.00	0	24.16	25.00	1	23.31
						50% RB Mid	3 Pos 1	25.00	0	24.17	25.00	1	23.32
			50% RB High	3 Pos 2		25.00	0	24.15	25.00	1	23.34		
	100% RB		6 Pos 0	25.00	1	23.14	25.00	2	22.17				
	27033		848.3	1RB Low	1 Pos 0	25.00	0	24.17	25.00	1	23.13		
				1RB Mid	1 Pos 2	25.00	0	24.20	25.00	1	23.15		
				1RB High	1 Pos 5	25.00	0	24.18	25.00	1	23.12		
				50% RB Low	3 Pos 0	25.00	0	24.15	25.00	1	23.39		
				50% RB Mid	3 Pos 1	25.00	0	24.19	25.00	1	23.41		
				50% RB High	3 Pos 2	25.00	0	24.21	25.00	1	23.45		
	100% RB		6 Pos 0	25.00	1	23.22	25.00	2	22.31				

B.2.2.21 LTE Band 26 FDD – Tablet Mode – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE26	15 MHz	26775	821.5	1RB Low	1 Pos 0	24.00	0	23.23	24.00	1	22.54
				1RB Mid	1 Pos 38	24.00	0	23.28	24.00	1	22.60
				1RB High	1 Pos 74	24.00	0	23.19	24.00	1	22.52
				50% RB Low	38 Pos 0	24.00	1	22.33	24.00	2	21.33
				50% RB Mid	38 Pos 19	24.00	1	22.31	24.00	2	21.30
				50% RB High	38 Pos 39	24.00	1	22.29	24.00	2	21.28
		100% RB	75 Pos 0	24.00	1	22.27	24.00	2	21.27		
		26865	831.5	1RB Low	1 Pos 0	24.00	0	23.28	24.00	1	22.30
				1RB Mid	1 Pos 38	24.00	0	23.37	24.00	1	22.40
				1RB High	1 Pos 74	24.00	0	23.30	24.00	1	22.33
				50% RB Low	38 Pos 0	24.00	1	22.21	24.00	2	21.21
				50% RB Mid	38 Pos 19	24.00	1	22.24	24.00	2	21.22
				50% RB High	38 Pos 39	24.00	1	22.23	24.00	2	21.26
		100% RB	75 Pos 0	24.00	1	22.25	24.00	2	21.27		
		26965	841.5	1RB Low	1 Pos 0	24.00	0	23.15	24.00	1	22.37
				1RB Mid	1 Pos 38	24.00	0	23.20	24.00	1	22.39
				1RB High	1 Pos 74	24.00	0	23.21	24.00	1	22.35
				50% RB Low	38 Pos 0	24.00	1	22.32	24.00	2	21.38
	50% RB Mid			38 Pos 19	24.00	1	22.33	24.00	2	21.34	
	50% RB High			38 Pos 39	24.00	1	22.29	24.00	2	21.32	
	100% RB	75 Pos 0	24.00	1	22.31	24.00	2	21.27			
	10 MHz	26750	820	1RB Low	1 Pos 0	24.00	0	23.26	24.00	1	22.61
				1RB Mid	1 Pos 24	24.00	0	23.30	24.00	1	22.62
				1RB High	1 Pos 49	24.00	0	23.25	24.00	1	22.56
				50% RB Low	25 Pos 0	24.00	1	22.32	24.00	2	21.37
				50% RB Mid	25 Pos 12	24.00	1	22.34	24.00	2	21.40
				50% RB High	25 Pos 24	24.00	1	22.32	24.00	2	21.41
		100% RB	50 Pos 0	24.00	1	22.35	24.00	2	21.31		
		26865	831.5	1RB Low	1 Pos 0	24.00	0	23.33	24.00	1	22.10
				1RB Mid	1 Pos 24	24.00	0	23.41	24.00	1	22.21
				1RB High	1 Pos 49	24.00	0	23.38	24.00	1	22.21
				50% RB Low	25 Pos 0	24.00	1	22.25	24.00	2	21.24
				50% RB Mid	25 Pos 12	24.00	1	22.29	24.00	2	21.29
				50% RB High	25 Pos 24	24.00	1	22.30	24.00	2	21.28
		100% RB	50 Pos 0	24.00	1	22.33	24.00	2	21.33		
		26990	844	1RB Low	1 Pos 0	24.00	0	23.36	24.00	1	22.54
				1RB Mid	1 Pos 24	24.00	0	23.34	24.00	1	22.56
				1RB High	1 Pos 49	24.00	0	23.31	24.00	1	22.50
				50% RB Low	25 Pos 0	24.00	1	22.35	24.00	2	21.35
	50% RB Mid			25 Pos 12	24.00	1	22.36	24.00	2	21.36	
	50% RB High			25 Pos 24	24.00	1	22.26	24.00	2	21.31	
	100% RB	50 Pos 0	24.00	1	22.34	24.00	2	21.30			
	5.0 MHz	26715	816.5	1RB Low	1 Pos 0	24.00	0	23.48	24.00	1	22.58
				1RB Mid	1 Pos 12	24.00	0	23.48	24.00	1	22.58
				1RB High	1 Pos 24	24.00	0	23.53	24.00	1	22.61
				50% RB Low	12 Pos 0	24.00	1	22.28	24.00	2	21.30
				50% RB Mid	12 Pos 6	24.00	1	22.30	24.00	2	21.27
				50% RB High	12 Pos 11	24.00	1	22.25	24.00	2	21.27
100% RB		25 Pos 0	24.00	1	22.34	24.00	2	21.37			
26865		831.5	1RB Low	1 Pos 0	24.00	0	23.27	24.00	1	22.56	
			1RB Mid	1 Pos 12	24.00	0	23.33	24.00	1	22.58	
			1RB High	1 Pos 24	24.00	0	23.31	24.00	1	22.56	
			50% RB Low	12 Pos 0	24.00	1	22.27	24.00	2	21.30	
			50% RB Mid	12 Pos 6	24.00	1	22.28	24.00	2	21.31	
			50% RB High	12 Pos 11	24.00	1	22.30	24.00	2	21.31	
100% RB		25 Pos 0	24.00	1	22.30	24.00	2	21.29			
27015		846.5	1RB Low	1 Pos 0	24.00	0	23.36	24.00	1	22.58	
			1RB Mid	1 Pos 12	24.00	0	23.38	24.00	1	22.50	
			1RB High	1 Pos 24	24.00	0	23.23	24.00	1	22.54	
			50% RB Low	12 Pos 0	24.00	0	23.28	24.00	1	22.60	
	50% RB Mid		12 Pos 6	24.00	0	23.19	24.00	1	22.52		
	50% RB High		12 Pos 11	24.00	1	22.33	24.00	2	21.33		
100% RB	25 Pos 0	24.00	1	22.31	24.00	2	21.30				

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE26	3.0 MHz	26705	815.5	1RB Low	1 Pos 0	24.00	0	23.26	24.00	1	22.58
				1RB Mid	1 Pos 7	24.00	0	23.29	24.00	1	22.59
				1RB High	1 Pos 14	24.00	0	23.25	24.00	1	22.59
				50% RB Low	8 Pos 0	24.00	1	22.32	24.00	2	21.34
				50% RB Mid	8 Pos 4	24.00	1	22.25	24.00	2	21.29
				50% RB High	8 Pos 7	24.00	1	22.32	24.00	2	21.33
		100% RB	15 Pos 0	24.00	1	22.30	24.00	2	21.25		
		26865	831.5	1RB Low	1 Pos 0	24.00	0	23.29	24.00	1	22.59
				1RB Mid	1 Pos 7	24.00	0	23.27	24.00	1	22.58
				1RB High	1 Pos 14	24.00	0	23.24	24.00	1	22.57
				50% RB Low	8 Pos 0	24.00	1	22.27	24.00	2	21.29
				50% RB Mid	8 Pos 4	24.00	1	22.25	24.00	2	21.28
				50% RB High	8 Pos 7	24.00	1	22.25	24.00	2	21.29
		100% RB	15 Pos 0	24.00	1	22.26	24.00	2	21.24		
		27025	847.5	1RB Low	1 Pos 0	24.00	0	23.28	24.00	1	22.55
				1RB Mid	1 Pos 7	24.00	0	23.29	24.00	1	22.59
				1RB High	1 Pos 14	24.00	0	23.29	24.00	1	22.61
				50% RB Low	8 Pos 0	24.00	1	22.32	24.00	2	21.37
	50% RB Mid			8 Pos 4	24.00	1	22.29	24.00	2	21.38	
	50% RB High			8 Pos 7	24.00	1	22.30	24.00	2	21.34	
	100% RB	15 Pos 0	24.00	1	22.25	24.00	2	21.24			
	1.4 MHz	26697	814.7	1RB Low	1 Pos 0	24.00	0	23.25	24.00	1	22.14
				1RB Mid	1 Pos 2	24.00	0	23.26	24.00	1	22.19
				1RB High	1 Pos 5	24.00	0	23.24	24.00	1	22.14
				50% RB Low	3 Pos 0	24.00	0	23.17	24.00	1	22.32
				50% RB Mid	3 Pos 1	24.00	0	23.16	24.00	1	22.30
				50% RB High	3 Pos 2	24.00	0	23.18	24.00	1	22.35
		100% RB	6 Pos 0	24.00	1	22.14	24.00	2	21.16		
		26865	831.5	1RB Low	1 Pos 0	24.00	0	23.19	24.00	1	22.16
				1RB Mid	1 Pos 2	24.00	0	23.24	24.00	1	22.22
				1RB High	1 Pos 5	24.00	0	23.24	24.00	1	22.16
				50% RB Low	3 Pos 0	24.00	0	23.11	24.00	1	22.28
				50% RB Mid	3 Pos 1	24.00	0	23.14	24.00	1	22.27
				50% RB High	3 Pos 2	24.00	0	23.13	24.00	1	22.32
		100% RB	6 Pos 0	24.00	1	22.11	24.00	2	21.12		
		27033	848.3	1RB Low	1 Pos 0	24.00	0	23.20	24.00	1	22.12
				1RB Mid	1 Pos 2	24.00	0	23.22	24.00	1	22.18
				1RB High	1 Pos 5	24.00	0	23.18	24.00	1	22.11
				50% RB Low	3 Pos 0	24.00	0	23.17	24.00	1	22.33
	50% RB Mid			3 Pos 1	24.00	0	23.21	24.00	1	22.38	
	50% RB High			3 Pos 2	24.00	0	23.19	24.00	1	22.39	
	100% RB	6 Pos 0	24.00	1	22.17	24.00	2	21.23			

B.2.2.22 LTE Band 30 FDD – Laptop Mode – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE30	10 MHz	27710	2310	1RB Low	1 Pos 0	22.50	0	21.14	22.50	1	20.40
				1RB Mid	1 Pos 24	22.50	0	21.17	22.50	1	20.44
				1RB High	1 Pos 49	22.50	0	21.13	22.50	1	20.44
				50% RB Low	25 Pos 0	22.50	1	20.13	22.50	2	19.23
				50% RB Mid	25 Pos 12	22.50	1	20.16	22.50	2	19.23
				50% RB High	25 Pos 24	22.50	1	20.04	22.50	2	19.09
	5.0 MHz	27710	2310	100% RB	50 Pos 0	22.50	1	20.17	22.50	2	19.15
				1RB Low	1 Pos 0	22.50	0	21.14	22.50	1	20.40
				1RB Mid	1 Pos 12	22.50	0	21.17	22.50	1	20.44
				1RB High	1 Pos 24	22.50	0	21.13	22.50	1	20.44
				50% RB Low	12 Pos 0	22.50	1	20.13	22.50	2	19.23
				50% RB Mid	12 Pos 6	22.50	1	20.16	22.50	2	19.23
				50% RB High	12 Pos 11	22.50	1	20.04	22.50	2	19.09
				100% RB	25 Pos 0	22.50	1	20.17	22.50	2	19.15

B.2.2.23 LTE Band 30 FDD – Tablet Mode – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE30	10 MHz	27710	2310	1RB Low	1 Pos 0	15.50	0	13.98	15.50	1	13.30
				1RB Mid	1 Pos 24	15.50	0	14.04	15.50	1	13.35
				1RB High	1 Pos 49	15.50	0	13.94	15.50	1	13.29
				50% RB Low	25 Pos 0	15.50	1	13.01	15.50	2	12.08
				50% RB Mid	25 Pos 12	15.50	1	13.06	15.50	2	12.10
				50% RB High	25 Pos 24	15.50	1	12.92	15.50	2	11.97
	5.0 MHz	27710	2310	100% RB	50 Pos 0	15.50	1	13.01	15.50	2	11.93
				1RB Low	1 Pos 0	15.50	0	14.04	15.50	1	13.34
				1RB Mid	1 Pos 12	15.50	0	14.10	15.50	1	13.30
				1RB High	1 Pos 24	15.50	0	14.04	15.50	1	13.31
				50% RB Low	12 Pos 0	15.50	1	13.08	15.50	2	12.00
				50% RB Mid	12 Pos 6	15.50	1	13.01	15.50	2	11.98
				50% RB High	12 Pos 11	15.50	1	12.98	15.50	2	11.93
				100% RB	25 Pos 0	15.50	1	13.05	15.50	2	12.07

B.2.2.24 LTE Band 30 FDD – Laptop Mode – Antenna 8

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE30	10 MHz	27710	2310	1RB Low	1 Pos 0	18.00	0	16.78	18.00	1	16.06
				1RB Mid	1 Pos 24	18.00	0	16.84	18.00	1	16.13
				1RB High	1 Pos 49	18.00	0	16.76	18.00	1	16.05
				50% RB Low	25 Pos 0	18.00	1	15.76	18.00	2	14.80
				50% RB Mid	25 Pos 12	18.00	1	15.81	18.00	2	14.85
				50% RB High	25 Pos 24	18.00	1	15.66	18.00	2	14.71
	5.0 MHz	27710	2310	100% RB	50 Pos 0	18.00	1	15.70	18.00	2	14.67
				1RB Low	1 Pos 0	18.00	0	16.86	18.00	1	16.08
				1RB Mid	1 Pos 12	18.00	0	16.90	18.00	1	16.09
				1RB High	1 Pos 24	18.00	0	16.87	18.00	1	16.06
				50% RB Low	12 Pos 0	18.00	1	15.77	18.00	2	14.76
				50% RB Mid	12 Pos 6	18.00	1	15.76	18.00	2	14.74
				50% RB High	12 Pos 11	18.00	1	15.70	18.00	2	14.67
				100% RB	25 Pos 0	18.00	1	15.74	18.00	2	14.77

B.2.2.25 LTE Band 30 FDD – Tablet Mode – Antenna 8

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE30	10 MHz	27710	2310	1RB Low	1 Pos 0	17.00	0	15.79	17.00	1	15.31
				1RB Mid	1 Pos 24	17.00	0	15.82	17.00	1	15.30
				1RB High	1 Pos 49	17.00	0	15.76	17.00	1	15.24
				50% RB Low	25 Pos 0	17.00	1	14.72	17.00	2	13.79
				50% RB Mid	25 Pos 12	17.00	1	14.77	17.00	2	13.81
				50% RB High	25 Pos 24	17.00	1	14.66	17.00	2	13.68
	100% RB	50 Pos 0	17.00	1	14.68	17.00	2	13.69			
	5.0 MHz	27710	2310	1RB Low	1 Pos 0	17.00	0	15.92	17.00	1	14.67
				1RB Mid	1 Pos 12	17.00	0	15.96	17.00	1	14.71
				1RB High	1 Pos 24	17.00	0	15.91	17.00	1	14.69
				50% RB Low	12 Pos 0	17.00	1	14.76	17.00	2	13.74
				50% RB Mid	12 Pos 6	17.00	1	14.73	17.00	2	13.73
				50% RB High	12 Pos 11	17.00	1	14.68	17.00	2	13.68
				100% RB	25 Pos 0	17.00	1	14.71	17.00	2	13.78

B.2.2.26 LTE Band 38 TDD – Laptop Mode – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 38	20 MHz	37850	2580	1RB Low	1 Pos 0	23.50	0	22.00	23.50	1	21.22
				1RB Mid	1 Pos 50	23.50	0	22.15	23.50	1	21.37
				1RB High	1 Pos 99	23.50	0	22.10	23.50	1	21.28
				50% RB Low	50 Pos 0	23.50	1	21.19	23.50	2	20.14
				50% RB Mid	50 Pos 24	23.50	1	21.16	23.50	2	20.18
				50% RB High	50 Pos 50	23.50	1	21.23	23.50	2	20.22
		100% RB	100 Pos 0	23.50	1	21.14	23.50	2	20.13		
		38000	2595	1RB Low	1 Pos 0	23.50	0	22.11	23.50	1	20.78
				1RB Mid	1 Pos 50	23.50	0	22.30	23.50	1	20.94
				1RB High	1 Pos 99	23.50	0	22.26	23.50	1	20.85
				50% RB Low	50 Pos 0	23.50	1	21.22	23.50	2	20.23
				50% RB Mid	50 Pos 24	23.50	1	21.22	23.50	2	20.22
				50% RB High	50 Pos 50	23.50	1	21.21	23.50	2	20.26
		100% RB	100 Pos 0	23.50	1	21.19	23.50	2	20.17		
		38150	2610	1RB Low	1 Pos 0	23.50	0	22.16	23.50	1	21.06
				1RB Mid	1 Pos 50	23.50	0	22.27	23.50	1	21.19
				1RB High	1 Pos 99	23.50	0	22.20	23.50	1	21.14
				50% RB Low	50 Pos 0	23.50	1	21.27	23.50	2	20.19
	50% RB Mid			50 Pos 24	23.50	1	21.25	23.50	2	20.19	
	50% RB High			50 Pos 50	23.50	1	21.23	23.50	2	20.20	
	100% RB	100 Pos 0	23.50	1	21.20	23.50	2	20.20			
	15 MHz	37825	2578	1RB Low	1 Pos 0	23.50	0	22.11	23.50	1	21.43
				1RB Mid	1 Pos 38	23.50	0	22.18	23.50	1	21.54
				1RB High	1 Pos 74	23.50	0	22.16	23.50	1	21.47
				50% RB Low	38 Pos 0	23.50	1	21.21	23.50	2	20.20
				50% RB Mid	38 Pos 19	23.50	1	21.19	23.50	2	20.16
				50% RB High	38 Pos 39	23.50	1	21.22	23.50	2	20.19
		100% RB	75 Pos 0	23.50	1	21.13	23.50	2	20.18		
		38000	2595	1RB Low	1 Pos 0	23.50	0	22.17	23.50	1	21.19
				1RB Mid	1 Pos 38	23.50	0	22.31	23.50	1	21.28
				1RB High	1 Pos 74	23.50	0	22.17	23.50	1	21.24
				50% RB Low	38 Pos 0	23.50	1	21.11	23.50	2	20.12
				50% RB Mid	38 Pos 19	23.50	1	21.22	23.50	2	20.15
				50% RB High	38 Pos 39	23.50	1	21.22	23.50	2	20.20
		100% RB	75 Pos 0	23.50	1	21.18	23.50	2	20.16		
		38175	2612	1RB Low	1 Pos 0	23.50	0	22.18	23.50	1	21.23
				1RB Mid	1 Pos 38	23.50	0	22.26	23.50	1	21.32
				1RB High	1 Pos 74	23.50	0	22.31	23.50	1	21.34
				50% RB Low	38 Pos 0	23.50	1	21.18	23.50	2	20.26
	50% RB Mid			38 Pos 19	23.50	1	21.23	23.50	2	20.29	
	50% RB High			38 Pos 39	23.50	1	21.30	23.50	2	20.31	
	100% RB	75 Pos 0	23.50	1	21.23	23.50	2	20.24			
	10 MHz	37800	2575	1RB Low	1 Pos 0	23.50	0	22.14	23.50	1	21.47
				1RB Mid	1 Pos 24	23.50	0	22.20	23.50	1	21.52
				1RB High	1 Pos 49	23.50	0	22.17	23.50	1	21.52
				50% RB Low	25 Pos 0	23.50	1	21.23	23.50	2	20.28
				50% RB Mid	25 Pos 12	23.50	1	21.24	23.50	2	20.27
				50% RB High	25 Pos 25	23.50	1	21.24	23.50	2	20.32
100% RB		50 Pos 0	23.50	1	21.23	23.50	2	20.23			
38000		2595	1RB Low	1 Pos 0	23.50	0	22.28	23.50	1	21.13	
			1RB Mid	1 Pos 24	23.50	0	22.27	23.50	1	21.18	
			1RB High	1 Pos 49	23.50	0	22.26	23.50	1	21.21	
			50% RB Low	25 Pos 0	23.50	1	21.15	23.50	2	20.21	
			50% RB Mid	25 Pos 12	23.50	1	21.25	23.50	2	20.24	
			50% RB High	25 Pos 25	23.50	1	21.19	23.50	2	20.20	
100% RB		50 Pos 0	23.50	1	21.22	23.50	2	20.19			
38200		2615	1RB Low	1 Pos 0	23.50	0	22.21	23.50	1	21.26	
			1RB Mid	1 Pos 24	23.50	0	22.30	23.50	1	21.32	
			1RB High	1 Pos 49	23.50	0	22.29	23.50	1	21.36	
			50% RB Low	25 Pos 0	23.50	1	21.23	23.50	2	20.26	
	50% RB Mid		25 Pos 12	23.50	1	21.28	23.50	2	20.24		
	50% RB High		25 Pos 25	23.50	1	21.29	23.50	2	20.29		
100% RB	50 Pos 0	23.50	1	21.24	23.50	2	20.20				

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 38	5 MHz	37775	2572	1RB Low	1 Pos 0	23.50	0	22.26	23.50	1	21.51
				1RB Mid	1 Pos 12	23.50	0	22.27	23.50	1	21.59
				1RB High	1 Pos 24	23.50	0	22.28	23.50	1	21.57
				50% RB Low	12 Pos 0	23.50	1	21.21	23.50	2	20.23
				50% RB Mid	12 Pos 6	23.50	1	21.19	23.50	2	20.19
				50% RB High	12 Pos 11	23.50	1	21.20	23.50	2	20.18
		100% RB	25 Pos 0	23.50	1	21.22	23.50	2	20.25		
		38000	2595	1RB Low	1 Pos 0	23.50	0	22.14	23.50	1	21.48
				1RB Mid	1 Pos 12	23.50	0	22.24	23.50	1	21.51
				1RB High	1 Pos 24	23.50	0	22.20	23.50	1	21.50
				50% RB Low	12 Pos 0	23.50	1	21.19	23.50	2	20.19
				50% RB Mid	12 Pos 6	23.50	1	21.23	23.50	2	20.22
				50% RB High	12 Pos 11	23.50	1	21.23	23.50	2	20.26
		100% RB	25 Pos 0	23.50	1	21.20	23.50	2	20.22		
		38225	2618	1RB Low	1 Pos 0	23.50	0	22.35	23.50	1	21.51
				1RB Mid	1 Pos 12	23.50	0	22.33	23.50	1	21.50
				1RB High	1 Pos 24	23.50	0	22.36	23.50	1	21.52
				50% RB Low	12 Pos 0	23.50	1	21.29	23.50	2	20.22
				50% RB Mid	12 Pos 6	23.50	1	21.33	23.50	2	20.21
				50% RB High	12 Pos 11	23.50	1	21.27	23.50	2	20.23
		100% RB	25 Pos 0	23.50	1	21.31	23.50	2	20.29		

B.2.2.27 LTE Band 38 TDD – Tablet Mode – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 38	20 MHz	37850	2580	1RB Low	1 Pos 0	20.50	0	20.04	20.50	1	19.23
				1RB Mid	1 Pos 50	20.50	0	20.08	20.50	1	19.30
				1RB High	1 Pos 99	20.50	0	20.11	20.50	1	19.29
				50% RB Low	50 Pos 0	20.50	1	19.10	20.50	2	18.14
				50% RB Mid	50 Pos 24	20.50	1	19.18	20.50	2	18.17
				50% RB High	50 Pos 50	20.50	1	19.13	20.50	2	18.19
		100% RB	100 Pos 0	20.50	1	19.10	20.50	2	18.10		
		38000	2595	1RB Low	1 Pos 0	20.50	0	20.08	20.50	1	18.72
				1RB Mid	1 Pos 50	20.50	0	20.27	20.50	1	18.90
				1RB High	1 Pos 99	20.50	0	20.14	20.50	1	18.82
				50% RB Low	50 Pos 0	20.50	1	19.14	20.50	2	18.20
				50% RB Mid	50 Pos 24	20.50	1	19.17	20.50	2	18.17
				50% RB High	50 Pos 50	20.50	1	19.18	20.50	2	18.18
		100% RB	100 Pos 0	20.50	1	19.19	20.50	2	18.17		
		38150	2610	1RB Low	1 Pos 0	20.50	0	20.07	20.50	1	19.02
				1RB Mid	1 Pos 50	20.50	0	20.22	20.50	1	19.16
				1RB High	1 Pos 99	20.50	0	20.18	20.50	1	19.09
				50% RB Low	50 Pos 0	20.50	1	19.18	20.50	2	18.13
	50% RB Mid			50 Pos 24	20.50	1	19.22	20.50	2	18.17	
	50% RB High			50 Pos 50	20.50	1	19.22	20.50	2	18.15	
	100% RB	100 Pos 0	20.50	1	19.14	20.50	2	18.13			
	15 MHz	37825	2578	1RB Low	1 Pos 0	20.50	0	20.03	20.50	1	19.40
				1RB Mid	1 Pos 38	20.50	0	20.11	20.50	1	19.49
				1RB High	1 Pos 74	20.50	0	20.06	20.50	1	19.41
				50% RB Low	38 Pos 0	20.50	1	19.07	20.50	2	18.13
				50% RB Mid	38 Pos 19	20.50	1	19.12	20.50	2	18.11
				50% RB High	38 Pos 39	20.50	1	19.12	20.50	2	18.09
		100% RB	75 Pos 0	20.50	1	19.08	20.50	2	18.09		
		38000	2595	1RB Low	1 Pos 0	20.50	0	20.16	20.50	1	19.18
				1RB Mid	1 Pos 38	20.50	0	20.23	20.50	1	19.30
				1RB High	1 Pos 74	20.50	0	20.19	20.50	1	19.22
				50% RB Low	38 Pos 0	20.50	1	19.14	20.50	2	18.10
				50% RB Mid	38 Pos 19	20.50	1	19.12	20.50	2	18.13
				50% RB High	38 Pos 39	20.50	1	19.18	20.50	2	18.14
		100% RB	75 Pos 0	20.50	1	19.16	20.50	2	18.15		
		38175	2612	1RB Low	1 Pos 0	20.50	0	20.15	20.50	1	19.20
				1RB Mid	1 Pos 38	20.50	0	20.20	20.50	1	19.22
				1RB High	1 Pos 74	20.50	0	20.25	20.50	1	19.25
				50% RB Low	38 Pos 0	20.50	1	19.18	20.50	2	18.17
	50% RB Mid			38 Pos 19	20.50	1	19.22	20.50	2	18.18	
	50% RB High			38 Pos 39	20.50	1	19.18	20.50	2	18.20	
	100% RB	75 Pos 0	20.50	1	19.19	20.50	2	18.18			
	10 MHz	37800	2575	1RB Low	1 Pos 0	20.50	0	20.14	20.50	1	19.44
				1RB Mid	1 Pos 24	20.50	0	20.16	20.50	1	19.47
				1RB High	1 Pos 49	20.50	0	20.11	20.50	1	19.45
				50% RB Low	25 Pos 0	20.50	1	19.18	20.50	2	18.25
				50% RB Mid	25 Pos 12	20.50	1	19.17	20.50	2	18.24
				50% RB High	25 Pos 25	20.50	1	19.16	20.50	2	18.24
100% RB		50 Pos 0	20.50	1	19.16	20.50	2	18.13			
38000		2595	1RB Low	1 Pos 0	20.50	0	20.21	20.50	1	19.12	
			1RB Mid	1 Pos 24	20.50	0	20.23	20.50	1	19.17	
			1RB High	1 Pos 49	20.50	0	20.25	20.50	1	19.18	
			50% RB Low	25 Pos 0	20.50	1	19.15	20.50	2	18.15	
			50% RB Mid	25 Pos 12	20.50	1	19.17	20.50	2	18.18	
			50% RB High	25 Pos 25	20.50	1	19.18	20.50	2	18.19	
100% RB		50 Pos 0	20.50	1	19.18	20.50	2	18.15			
38200		2615	1RB Low	1 Pos 0	20.50	0	20.22	20.50	1	19.21	
			1RB Mid	1 Pos 24	20.50	0	20.33	20.50	1	19.28	
			1RB High	1 Pos 49	20.50	0	20.25	20.50	1	19.33	
			50% RB Low	25 Pos 0	20.50	1	19.22	20.50	2	18.21	
	50% RB Mid		25 Pos 12	20.50	1	19.18	20.50	2	18.24		
	50% RB High		25 Pos 25	20.50	1	19.29	20.50	2	18.33		
100% RB	50 Pos 0	20.50	1	19.26	20.50	2	18.21				

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 38	5 MHz	37775	2572	1RB Low	1 Pos 0	20.50	0	20.20	20.50	1	19.48
				1RB Mid	1 Pos 12	20.50	0	20.27	20.50	1	19.46
				1RB High	1 Pos 24	20.50	0	20.26	20.50	1	19.48
				50% RB Low	12 Pos 0	20.50	1	19.09	20.50	2	18.09
				50% RB Mid	12 Pos 6	20.50	1	19.17	20.50	2	18.12
				50% RB High	12 Pos 11	20.50	1	19.08	20.50	2	18.08
		38000	2595	100% RB	25 Pos 0	20.50	1	19.13	20.50	2	18.14
				1RB Low	1 Pos 0	20.50	0	20.18	20.50	1	19.48
				1RB Mid	1 Pos 12	20.50	0	20.25	20.50	1	19.50
				1RB High	1 Pos 24	20.50	0	20.27	20.50	1	19.50
				50% RB Low	12 Pos 0	20.50	1	19.14	20.50	2	18.12
				50% RB Mid	12 Pos 6	20.50	1	19.15	20.50	2	18.13
		38225	2618	50% RB High	12 Pos 11	20.50	1	19.16	20.50	2	18.14
				100% RB	25 Pos 0	20.50	1	19.18	20.50	2	18.16
				1RB Low	1 Pos 0	20.50	0	20.24	20.50	1	19.49
				1RB Mid	1 Pos 12	20.50	0	20.15	20.50	1	19.50
				1RB High	1 Pos 24	20.50	0	20.21	20.50	1	19.50
				50% RB Low	12 Pos 0	20.50	1	19.22	20.50	2	18.19
		50% RB Mid	12 Pos 6	20.50	1	19.20	20.50	2	18.27		
		50% RB High	12 Pos 11	20.50	1	19.23	20.50	2	18.21		
		100% RB	25 Pos 0	20.50	1	19.24	20.50	2	18.24		

B.2.2.28 LTE Band 41 TDD – Laptop Mode – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE41	20 MHz	39750	2506	1RB Low	1 Pos 0	21.00	0	20.69	21.00	1	19.92
				1RB Mid	1 Pos 50	21.00	0	20.35	21.00	1	19.56
				1RB High	1 Pos 99	21.00	0	19.88	21.00	1	19.08
				50% RB Low	50 Pos 0	21.00	1	19.50	21.00	2	18.53
				50% RB Mid	50 Pos 24	21.00	1	19.44	21.00	2	18.45
				50% RB High	50 Pos 50	21.00	1	19.16	21.00	2	18.13
		100% RB	100 Pos 0	21.00	1	19.36	21.00	2	18.33		
		40185	2549.5	1RB Low	1 Pos 0	21.00	0	19.41	21.00	1	18.08
				1RB Mid	1 Pos 50	21.00	0	19.56	21.00	1	18.20
				1RB High	1 Pos 99	21.00	0	19.67	21.00	1	18.30
				50% RB Low	50 Pos 0	21.00	1	18.55	21.00	2	17.59
				50% RB Mid	50 Pos 24	21.00	1	18.61	21.00	2	17.60
				50% RB High	50 Pos 50	21.00	1	18.68	21.00	2	17.63
		100% RB	100 Pos 0	21.00	1	18.56	21.00	2	17.53		
		40620	2593	1RB Low	1 Pos 0	21.00	0	19.97	21.00	1	18.95
				1RB Mid	1 Pos 50	21.00	0	20.15	21.00	1	19.12
				1RB High	1 Pos 99	21.00	0	20.28	21.00	1	19.27
				50% RB Low	50 Pos 0	21.00	1	19.03	21.00	2	17.98
				50% RB Mid	50 Pos 24	21.00	1	19.16	21.00	2	18.08
				50% RB High	50 Pos 50	21.00	1	19.25	21.00	2	18.21
		100% RB	100 Pos 0	21.00	1	19.17	21.00	2	18.12		
		41055	2636.5	1RB Low	1 Pos 0	21.00	0	20.55	21.00	1	19.76
				1RB Mid	1 Pos 50	21.00	0	20.73	21.00	1	19.91
				1RB High	1 Pos 99	21.00	0	20.58	21.00	1	19.76
				50% RB Low	50 Pos 0	21.00	1	19.80	21.00	2	18.78
				50% RB Mid	50 Pos 24	21.00	1	19.83	21.00	2	18.80
				50% RB High	50 Pos 50	21.00	1	19.73	21.00	2	18.74
		100% RB	100 Pos 0	21.00	1	19.71	21.00	2	18.70		
		41490	2680	1RB Low	1 Pos 0	21.00	0	20.23	21.00	1	18.90
				1RB Mid	1 Pos 50	21.00	0	20.15	21.00	1	18.81
				1RB High	1 Pos 99	21.00	0	19.84	21.00	1	18.62
				50% RB Low	50 Pos 0	21.00	1	19.13	21.00	2	18.21
				50% RB Mid	50 Pos 24	21.00	1	19.12	21.00	2	18.16
				50% RB High	50 Pos 50	21.00	1	19.08	21.00	2	18.13
		100% RB	100 Pos 0	21.00	1	19.13	21.00	2	18.13		

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM			
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	
LTE41	15 MHz	39750	2506	1RB Low	1 Pos 0	21.00	0	20.60	21.00	1	19.96	
				1RB Mid	1 Pos 38	21.00	0	20.30	21.00	1	19.66	
				1RB High	1 Pos 74	21.00	0	19.96	21.00	1	19.33	
				50% RB Low	38 Pos 0	21.00	1	19.48	21.00	2	18.54	
				50% RB Mid	38 Pos 19	21.00	1	19.32	21.00	2	18.31	
				50% RB High	38 Pos 39	21.00	1	19.18	21.00	2	18.13	
		40185	2549.5	2593	100% RB	75 Pos 0	21.00	1	19.35	21.00	2	18.38
					1RB Low	1 Pos 0	21.00	0	19.52	21.00	1	18.57
					1RB Mid	1 Pos 38	21.00	0	19.58	21.00	1	18.59
					1RB High	1 Pos 74	21.00	0	19.65	21.00	1	18.66
					50% RB Low	38 Pos 0	21.00	1	18.49	21.00	2	17.50
					50% RB Mid	38 Pos 19	21.00	1	18.49	21.00	2	17.45
		40620	2593	2636.5	50% RB High	38 Pos 39	21.00	1	18.60	21.00	2	17.57
					100% RB	75 Pos 0	21.00	1	18.56	21.00	2	17.55
					1RB Low	1 Pos 0	21.00	0	20.03	21.00	1	19.08
					1RB Mid	1 Pos 38	21.00	0	20.15	21.00	1	19.20
					1RB High	1 Pos 74	21.00	0	20.26	21.00	1	19.27
					50% RB Low	38 Pos 0	21.00	1	19.05	21.00	2	18.11
		41055	2636.5	2680.0	50% RB Mid	38 Pos 19	21.00	1	19.14	21.00	2	18.14
					50% RB High	38 Pos 39	21.00	1	19.20	21.00	2	18.22
					100% RB	75 Pos 0	21.00	1	19.13	21.00	2	18.09
					1RB Low	1 Pos 0	21.00	0	20.61	21.00	1	19.93
					1RB Mid	1 Pos 38	21.00	0	20.74	21.00	1	19.97
					1RB High	1 Pos 74	21.00	0	20.57	21.00	1	19.91
		41490	2680.0	2680.0	50% RB Low	38 Pos 0	21.00	1	19.73	21.00	2	18.73
					50% RB Mid	38 Pos 19	21.00	1	19.71	21.00	2	18.73
					50% RB High	38 Pos 39	21.00	1	19.74	21.00	2	18.72
					100% RB	75 Pos 0	21.00	1	19.69	21.00	2	18.70
					1RB Low	1 Pos 0	21.00	0	20.19	21.00	1	19.31
					1RB Mid	1 Pos 38	21.00	0	20.22	21.00	1	19.18
		41490	2680.0	2680.0	1RB High	1 Pos 74	21.00	0	20.12	21.00	1	19.09
					50% RB Low	38 Pos 0	21.00	1	19.14	21.00	2	18.14
					50% RB Mid	38 Pos 19	21.00	1	19.12	21.00	2	18.11
					50% RB High	38 Pos 39	21.00	1	19.05	21.00	2	18.09
					100% RB	75 Pos 0	21.00	1	19.11	21.00	2	18.08

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM			
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	
LTE41	10 MHz	39750	2506	1RB Low	1 Pos 0	21.00	0	20.57	21.00	1	19.88	
				1RB Mid	1 Pos 24	21.00	0	20.37	21.00	1	19.70	
				1RB High	1 Pos 49	21.00	0	20.13	21.00	1	19.45	
				50% RB Low	25 Pos 0	21.00	1	19.47	21.00	2	18.56	
				50% RB Mid	25 Pos 12	21.00	1	19.37	21.00	2	18.47	
				50% RB High	25 Pos 24	21.00	1	19.24	21.00	2	18.34	
		40185	2549.5	2593	100% RB	50 Pos 0	21.00	1	19.39	21.00	2	18.36
					1RB Low	1 Pos 0	21.00	0	19.62	21.00	1	18.46
					1RB Mid	1 Pos 24	21.00	0	19.54	21.00	1	18.43
					1RB High	1 Pos 49	21.00	0	19.70	21.00	1	18.56
					50% RB Low	25 Pos 0	21.00	1	18.51	21.00	2	17.57
					50% RB Mid	25 Pos 12	21.00	1	18.52	21.00	2	17.54
		40620	2593	2636.5	50% RB High	25 Pos 24	21.00	1	18.58	21.00	2	17.59
					100% RB	50 Pos 0	21.00	1	18.59	21.00	2	17.55
					1RB Low	1 Pos 0	21.00	0	20.13	21.00	1	19.16
					1RB Mid	1 Pos 24	21.00	0	20.17	21.00	1	19.20
					1RB High	1 Pos 49	21.00	0	20.25	21.00	1	19.25
					50% RB Low	25 Pos 0	21.00	1	19.10	21.00	2	18.11
		41055	2636.5	2680	50% RB Mid	25 Pos 12	21.00	1	19.14	21.00	2	18.13
					100% RB	50 Pos 0	21.00	1	19.18	21.00	2	18.20
					1RB Low	1 Pos 0	21.00	1	19.19	21.00	2	18.13
					1RB Mid	1 Pos 24	21.00	0	20.65	21.00	1	19.96
					1RB High	1 Pos 49	21.00	0	20.75	21.00	1	20.00
					50% RB Low	25 Pos 0	21.00	0	20.78	21.00	1	20.00
		41490	2680	2680	50% RB Mid	25 Pos 12	21.00	1	19.78	21.00	2	18.83
					100% RB	50 Pos 0	21.00	1	19.78	21.00	2	18.82
					1RB Low	1 Pos 0	21.00	1	19.77	21.00	2	18.84
					1RB Mid	1 Pos 24	21.00	1	19.79	21.00	2	18.74
					1RB High	1 Pos 49	21.00	0	20.18	21.00	1	19.04
					50% RB Low	25 Pos 0	21.00	0	20.14	21.00	1	19.06
		41490	2680	2680	50% RB Mid	25 Pos 12	21.00	0	20.04	21.00	1	19.01
					100% RB	50 Pos 0	21.00	1	19.09	21.00	2	18.12
					1RB Low	1 Pos 0	21.00	1	19.10	21.00	2	18.11
					1RB Mid	1 Pos 24	21.00	1	19.09	21.00	2	18.15
					1RB High	1 Pos 49	21.00	1	19.14	21.00	2	18.14

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM			
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	
LTE41	5.0 MHz	39750	2506	1RB Low	1 Pos 0	19.50	0	18.65	19.50	1	18.01	
				1RB Mid	1 Pos 12	19.50	0	18.57	19.50	1	17.92	
				1RB High	1 Pos 24	19.50	0	18.48	19.50	1	17.83	
				50% RB Low	12 Pos 0	19.50	1	17.58	19.50	2	16.53	
				50% RB Mid	12 Pos 6	19.50	1	17.54	19.50	2	16.49	
				50% RB High	12 Pos 11	19.50	1	17.53	19.50	2	16.48	
		40185	2549.5	2593	100% RB	25 Pos 0	19.50	1	17.57	19.50	2	16.56
					1RB Low	1 Pos 0	19.50	0	17.77	19.50	1	17.06
					1RB Mid	1 Pos 12	19.50	0	17.70	19.50	1	16.96
					1RB High	1 Pos 24	19.50	0	17.75	19.50	1	16.97
					50% RB Low	12 Pos 0	19.50	1	16.74	19.50	2	15.78
					50% RB Mid	12 Pos 6	19.50	1	16.76	19.50	2	15.75
		40620	2593	2636.5	50% RB High	12 Pos 11	19.50	1	16.72	19.50	2	15.80
					100% RB	25 Pos 0	19.50	1	16.78	19.50	2	15.76
					1RB Low	1 Pos 0	19.50	0	18.43	19.50	1	17.76
					1RB Mid	1 Pos 12	19.50	0	18.43	19.50	1	17.75
					1RB High	1 Pos 24	19.50	0	18.44	19.50	1	17.75
					50% RB Low	12 Pos 0	19.50	1	17.28	19.50	2	16.30
		41055	2636.5	2680	50% RB Mid	12 Pos 6	19.50	1	17.31	19.50	2	16.29
					50% RB High	12 Pos 11	19.50	1	17.34	19.50	2	16.31
					100% RB	25 Pos 0	19.50	1	17.33	19.50	2	16.37
					1RB Low	1 Pos 0	19.50	0	18.88	19.50	1	18.19
					1RB Mid	1 Pos 12	19.50	0	18.98	19.50	1	18.19
					1RB High	1 Pos 24	19.50	0	19.02	19.50	1	18.25
		41490	2680	2724	50% RB Low	12 Pos 0	19.50	1	17.95	19.50	2	17.03
					50% RB Mid	12 Pos 6	19.50	1	17.99	19.50	2	17.02
					50% RB High	12 Pos 11	19.50	1	18.00	19.50	2	17.04
					100% RB	25 Pos 0	19.50	1	18.02	19.50	2	17.02
					1RB Low	1 Pos 0	19.50	0	18.40	19.50	1	17.59
					1RB Mid	1 Pos 12	19.50	0	18.36	19.50	1	17.54
		41490	2680	2768	1RB High	1 Pos 24	19.50	0	18.42	19.50	1	17.53
					50% RB Low	12 Pos 0	19.50	1	17.31	19.50	2	16.28
					50% RB Mid	12 Pos 6	19.50	1	17.35	19.50	2	16.27
					50% RB High	12 Pos 11	19.50	1	17.32	19.50	2	16.28
					100% RB	25 Pos 0	19.50	1	17.36	19.50	2	16.32

B.2.2.29 LTE Band 41 TDD – Laptop Mode – Antenna 8

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE41	20 MHz	39750	2506	1RB Low	1 Pos 0	17.00	0	16.14	17.00	1	15.34
				1RB Mid	1 Pos 50	17.00	0	16.26	17.00	1	15.41
				1RB High	1 Pos 99	17.00	0	16.14	17.00	1	15.32
				50% RB Low	50 Pos 0	17.00	1	15.23	17.00	2	14.32
				50% RB Mid	50 Pos 24	17.00	1	15.25	17.00	2	14.35
				50% RB High	50 Pos 50	17.00	1	15.26	17.00	2	14.25
		40185	2549.5	100% RB	100 Pos 0	17.00	1	15.18	17.00	2	14.24
				1RB Low	1 Pos 0	17.00	0	15.94	17.00	1	15.18
				1RB Mid	1 Pos 50	17.00	0	16.48	17.00	1	15.34
				1RB High	1 Pos 99	17.00	0	16.18	17.00	1	15.39
				50% RB Low	50 Pos 0	17.00	1	15.15	17.00	2	14.19
				50% RB Mid	50 Pos 24	17.00	1	15.42	17.00	2	14.24
		40620	2593	50% RB High	50 Pos 50	17.00	1	15.16	17.00	2	14.24
				100% RB	100 Pos 0	17.00	1	15.16	17.00	2	14.24
				1RB Low	1 Pos 0	17.00	0	16.29	17.00	1	15.52
				1RB Mid	1 Pos 50	17.00	0	16.48	17.00	1	15.68
				1RB High	1 Pos 99	17.00	0	16.40	17.00	1	15.60
				50% RB Low	50 Pos 0	17.00	1	15.38	17.00	2	14.45
		41055	2636.5	50% RB Mid	50 Pos 24	17.00	1	15.42	17.00	2	14.45
				50% RB High	50 Pos 50	17.00	1	15.39	17.00	2	14.48
				100% RB	100 Pos 0	17.00	1	15.40	17.00	2	14.48
				1RB Low	1 Pos 0	17.00	0	16.25	17.00	1	15.44
				1RB Mid	1 Pos 50	17.00	0	16.24	17.00	1	15.42
				1RB High	1 Pos 99	17.00	0	16.02	17.00	1	15.16
		41490	2680	50% RB Low	50 Pos 0	17.00	1	15.29	17.00	2	14.32
				50% RB Mid	50 Pos 24	17.00	1	15.23	17.00	2	14.24
				50% RB High	50 Pos 50	17.00	1	15.11	17.00	2	14.18
				100% RB	100 Pos 0	17.00	1	15.17	17.00	2	14.25
				1RB Low	1 Pos 0	17.00	0	16.04	17.00	1	15.19
				1RB Mid	1 Pos 50	17.00	0	16.15	17.00	1	15.36
		41490	2680	1RB High	1 Pos 99	17.00	0	16.04	17.00	1	15.24
				50% RB Low	50 Pos 0	17.00	1	15.10	17.00	2	14.13
				50% RB Mid	50 Pos 24	17.00	1	15.14	17.00	2	14.17
				50% RB High	50 Pos 50	17.00	1	15.09	17.00	2	14.19
				100% RB	100 Pos 0	17.00	1	15.08	17.00	2	14.14

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM			
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	
LTE41	15 MHz	39750	2506	1RB Low	1 Pos 0	17.00	0	16.14	17.00	1	15.48	
				1RB Mid	1 Pos 38	17.00	0	16.17	17.00	1	15.52	
				1RB High	1 Pos 74	17.00	0	16.15	17.00	1	15.47	
				50% RB Low	38 Pos 0	17.00	1	15.24	17.00	2	14.30	
				50% RB Mid	38 Pos 19	17.00	1	15.21	17.00	2	14.24	
				50% RB High	38 Pos 39	17.00	1	15.18	17.00	2	14.19	
		40185	2549.5	2593	100% RB	75 Pos 0	17.00	1	15.21	17.00	2	14.26
					1RB Low	1 Pos 0	17.00	0	16.09	17.00	1	15.42
					1RB Mid	1 Pos 38	17.00	0	16.07	17.00	1	15.43
					1RB High	1 Pos 74	17.00	0	16.11	17.00	1	15.46
					50% RB Low	38 Pos 0	17.00	1	15.11	17.00	2	14.22
					50% RB Mid	38 Pos 19	17.00	1	15.13	17.00	2	14.14
		40620	2593	2636.5	50% RB High	38 Pos 39	17.00	1	15.07	17.00	2	14.23
					100% RB	75 Pos 0	17.00	1	15.17	17.00	2	14.26
					1RB Low	1 Pos 0	17.00	0	16.35	17.00	1	15.72
					1RB Mid	1 Pos 38	17.00	0	16.36	17.00	1	15.81
					1RB High	1 Pos 74	17.00	0	16.33	17.00	1	15.67
					50% RB Low	38 Pos 0	17.00	1	15.37	17.00	2	14.45
		41055	2636.5	2680.0	50% RB Mid	38 Pos 19	17.00	1	15.41	17.00	2	14.44
					50% RB High	38 Pos 39	17.00	1	15.37	17.00	2	14.46
					100% RB	75 Pos 0	17.00	1	15.47	17.00	2	14.50
					1RB Low	1 Pos 0	17.00	0	16.20	17.00	1	15.57
					1RB Mid	1 Pos 38	17.00	0	16.18	17.00	1	15.46
					1RB High	1 Pos 74	17.00	0	15.95	17.00	1	15.31
		41490	2680.0	2680.0	50% RB Low	38 Pos 0	17.00	1	15.22	17.00	2	14.30
					50% RB Mid	38 Pos 19	17.00	1	15.14	17.00	2	14.22
					50% RB High	38 Pos 39	17.00	1	15.07	17.00	2	14.19
					100% RB	75 Pos 0	17.00	1	15.22	17.00	2	14.22
					1RB Low	1 Pos 0	17.00	0	16.06	17.00	1	15.36
					1RB Mid	1 Pos 38	17.00	0	16.10	17.00	1	15.46
		41490	2680.0	2680.0	1RB High	1 Pos 74	17.00	0	16.08	17.00	1	15.41
					50% RB Low	38 Pos 0	17.00	1	15.05	17.00	2	14.15
					50% RB Mid	38 Pos 19	17.00	1	15.08	17.00	2	14.15
					50% RB High	38 Pos 39	17.00	1	15.07	17.00	2	14.16
					100% RB	75 Pos 0	17.00	1	15.06	17.00	2	14.14

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM			
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	
LTE41	10 MHz	39750	2506	1RB Low	1 Pos 0	17.00	0	16.23	17.00	1	15.58	
				1RB Mid	1 Pos 24	17.00	0	16.25	17.00	1	15.60	
				1RB High	1 Pos 49	17.00	0	16.20	17.00	1	15.55	
				50% RB Low	25 Pos 0	17.00	1	15.24	17.00	2	14.39	
				50% RB Mid	25 Pos 12	17.00	1	15.23	17.00	2	14.32	
				50% RB High	25 Pos 24	17.00	1	15.20	17.00	2	14.37	
		40185	2549.5	2593	100% RB	50 Pos 0	17.00	1	15.26	17.00	2	14.26
					1RB Low	1 Pos 0	17.00	0	16.14	17.00	1	15.46
					1RB Mid	1 Pos 24	17.00	0	16.16	17.00	1	15.46
					1RB High	1 Pos 49	17.00	0	16.22	17.00	1	15.53
					50% RB Low	25 Pos 0	17.00	1	15.16	17.00	2	14.27
					50% RB Mid	25 Pos 12	17.00	1	15.15	17.00	2	14.29
		40620	2593	2636.5	50% RB High	25 Pos 24	17.00	1	15.15	17.00	2	14.32
					100% RB	50 Pos 0	17.00	1	15.19	17.00	2	14.22
					1RB Low	1 Pos 0	17.00	0	16.46	17.00	1	15.78
					1RB Mid	1 Pos 24	17.00	0	16.41	17.00	1	15.78
					1RB High	1 Pos 49	17.00	0	16.39	17.00	1	15.74
					50% RB Low	25 Pos 0	17.00	1	15.38	17.00	2	14.54
		41055	2636.5	2680	50% RB Mid	25 Pos 12	17.00	1	15.40	17.00	2	14.52
					100% RB	50 Pos 0	17.00	1	15.38	17.00	2	14.53
					1RB Low	1 Pos 0	17.00	1	15.43	17.00	2	14.51
					1RB Mid	1 Pos 24	17.00	0	16.28	17.00	1	15.60
					1RB High	1 Pos 49	17.00	0	16.22	17.00	1	15.53
					50% RB Low	25 Pos 0	17.00	0	16.09	17.00	1	15.43
		41490	2680	2680	50% RB Mid	25 Pos 12	17.00	1	15.20	17.00	2	14.31
					100% RB	50 Pos 0	17.00	1	15.18	17.00	2	14.27
					1RB Low	1 Pos 0	17.00	1	15.13	17.00	2	14.25
					1RB Mid	1 Pos 24	17.00	1	15.20	17.00	2	14.21
					1RB High	1 Pos 49	17.00	0	16.08	17.00	1	15.40
					50% RB Low	25 Pos 0	17.00	0	16.16	17.00	1	15.42
		41490	2680	2680	50% RB Mid	25 Pos 12	17.00	0	16.15	17.00	1	15.46
					100% RB	50 Pos 0	17.00	1	15.06	17.00	2	14.19
					1RB Low	1 Pos 0	17.00	1	15.07	17.00	2	14.24
					1RB Mid	1 Pos 24	17.00	1	15.09	17.00	2	14.19
					1RB High	1 Pos 49	17.00	1	15.11	17.00	2	14.17

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM			
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	
LTE41	5.0 MHz	39750	2506	1RB Low	1 Pos 0	17.00	0	16.29	17.00	1	15.61	
				1RB Mid	1 Pos 12	17.00	0	16.29	17.00	1	15.62	
				1RB High	1 Pos 24	17.00	0	16.25	17.00	1	15.57	
				50% RB Low	12 Pos 0	17.00	1	15.21	17.00	2	14.27	
				50% RB Mid	12 Pos 6	17.00	1	15.22	17.00	2	14.26	
				50% RB High	12 Pos 11	17.00	1	15.20	17.00	2	14.24	
		40185	2549.5	2593	100% RB	25 Pos 0	17.00	1	15.21	17.00	2	14.28
					1RB Low	1 Pos 0	17.00	0	16.25	17.00	1	15.55
					1RB Mid	1 Pos 12	17.00	0	16.25	17.00	1	15.49
					1RB High	1 Pos 24	17.00	0	16.26	17.00	1	15.56
					50% RB Low	12 Pos 0	17.00	1	15.14	17.00	2	14.18
					50% RB Mid	12 Pos 6	17.00	1	15.10	17.00	2	14.16
		40620	2593	2636.5	50% RB High	12 Pos 11	17.00	1	15.07	17.00	2	14.13
					100% RB	25 Pos 0	17.00	1	15.15	17.00	2	14.26
					1RB Low	1 Pos 0	17.00	0	16.41	17.00	1	15.94
					1RB Mid	1 Pos 12	17.00	0	16.41	17.00	1	15.87
					1RB High	1 Pos 24	17.00	0	16.38	17.00	1	15.79
					50% RB Low	12 Pos 0	17.00	1	15.42	17.00	2	14.43
		41055	2636.5	2680	50% RB Mid	12 Pos 6	17.00	1	15.37	17.00	2	14.39
					50% RB High	12 Pos 11	17.00	1	15.40	17.00	2	14.42
					100% RB	25 Pos 0	17.00	1	15.46	17.00	2	14.53
					1RB Low	1 Pos 0	17.00	0	16.21	17.00	1	15.59
					1RB Mid	1 Pos 12	17.00	0	16.24	17.00	1	15.60
					1RB High	1 Pos 24	17.00	0	16.22	17.00	1	15.55
		41490	2680	2680	50% RB Low	12 Pos 0	17.00	1	15.17	17.00	2	14.21
					50% RB Mid	12 Pos 6	17.00	1	15.13	17.00	2	14.17
					50% RB High	12 Pos 11	17.00	1	15.19	17.00	2	14.17
					100% RB	25 Pos 0	17.00	1	15.17	17.00	2	14.28
					1RB Low	1 Pos 0	17.00	0	16.06	17.00	1	15.45
					1RB Mid	1 Pos 12	17.00	0	16.08	17.00	1	15.53
		41490	2680	2680	1RB High	1 Pos 24	17.00	0	16.13	17.00	1	15.52
					50% RB Low	12 Pos 0	17.00	1	15.07	17.00	2	14.08
					50% RB Mid	12 Pos 6	17.00	1	15.06	17.00	2	14.10
					50% RB High	12 Pos 11	17.00	1	15.10	17.00	2	14.11
					100% RB	25 Pos 0	17.00	1	15.09	17.00	2	14.15

B.2.2.30 LTE Band 41 TDD – Tablet Mode – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE41	20 MHz	39750	2506	1RB Low	1 Pos 0	16.00	0	15.66	16.00	1	14.83
				1RB Mid	1 Pos 50	16.00	0	15.28	16.00	1	14.49
				1RB High	1 Pos 99	16.00	0	14.78	16.00	1	13.96
				50% RB Low	50 Pos 0	16.00	1	14.47	16.00	2	13.46
				50% RB Mid	50 Pos 24	16.00	1	14.34	16.00	2	13.32
				50% RB High	50 Pos 50	16.00	1	14.06	16.00	2	13.15
		40185	2549.5	100% RB	100 Pos 0	16.00	1	14.27	16.00	2	13.24
				1RB Low	1 Pos 0	16.00	0	14.26	16.00	1	13.45
				1RB Mid	1 Pos 50	16.00	0	14.41	16.00	1	13.58
				1RB High	1 Pos 99	16.00	0	14.52	16.00	1	13.71
				50% RB Low	50 Pos 0	16.00	1	13.48	16.00	2	12.45
				50% RB Mid	50 Pos 24	16.00	1	13.43	16.00	2	12.43
		40620	2593	50% RB High	50 Pos 50	16.00	1	13.45	16.00	2	12.43
				100% RB	100 Pos 0	16.00	1	13.50	16.00	2	12.46
				1RB Low	1 Pos 0	16.00	0	14.81	16.00	1	14.01
				1RB Mid	1 Pos 50	16.00	0	15.09	16.00	1	14.28
				1RB High	1 Pos 99	16.00	0	15.22	16.00	1	14.38
				50% RB Low	50 Pos 0	16.00	1	13.93	16.00	2	12.90
		41055	2636.5	50% RB Mid	50 Pos 24	16.00	1	14.04	16.00	2	13.03
				50% RB High	50 Pos 50	16.00	1	14.11	16.00	2	13.09
				100% RB	100 Pos 0	16.00	1	14.04	16.00	2	13.01
				1RB Low	1 Pos 0	16.00	0	15.47	16.00	1	14.67
				1RB Mid	1 Pos 50	16.00	0	15.68	16.00	1	14.85
				1RB High	1 Pos 99	16.00	0	15.54	16.00	1	14.68
		41490	2680	50% RB Low	50 Pos 0	16.00	1	14.65	16.00	2	13.60
				50% RB Mid	50 Pos 24	16.00	1	14.65	16.00	2	13.66
				50% RB High	50 Pos 50	16.00	1	14.61	16.00	2	13.63
				100% RB	100 Pos 0	16.00	1	14.63	16.00	2	13.59
				1RB Low	1 Pos 0	16.00	0	15.66	16.00	1	14.83
				1RB Mid	1 Pos 50	16.00	0	15.28	16.00	1	14.49
		41490	2680	1RB High	1 Pos 99	16.00	0	14.78	16.00	1	13.96
				50% RB Low	50 Pos 0	16.00	1	14.47	16.00	2	13.46
				50% RB Mid	50 Pos 24	16.00	1	14.34	16.00	2	13.32
				50% RB High	50 Pos 50	16.00	1	14.06	16.00	2	13.15
				100% RB	100 Pos 0	16.00	1	14.27	16.00	2	13.24

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM			
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	
LTE41	15 MHz	39750	2506	1RB Low	1 Pos 0	16.00	0	15.69	16.00	1	14.99	
				1RB Mid	1 Pos 38	16.00	0	15.40	16.00	1	14.74	
				1RB High	1 Pos 74	16.00	0	15.13	16.00	1	14.45	
				50% RB Low	38 Pos 0	16.00	1	14.53	16.00	2	13.52	
				50% RB Mid	38 Pos 19	16.00	1	14.44	16.00	2	13.45	
				50% RB High	38 Pos 39	16.00	1	14.34	16.00	2	13.32	
		40185	2549.5	2593	100% RB	75 Pos 0	16.00	1	14.44	16.00	2	13.42
					1RB Low	1 Pos 0	16.00	0	14.69	16.00	1	13.98
					1RB Mid	1 Pos 38	16.00	0	14.58	16.00	1	14.00
					1RB High	1 Pos 74	16.00	0	14.64	16.00	1	13.97
					50% RB Low	38 Pos 0	16.00	1	13.69	16.00	2	12.70
					50% RB Mid	38 Pos 19	16.00	1	13.67	16.00	2	12.73
		40620	2593	2636.5	50% RB High	38 Pos 39	16.00	1	13.64	16.00	2	12.63
					100% RB	75 Pos 0	16.00	1	13.61	16.00	2	12.62
					1RB Low	1 Pos 0	16.00	0	15.08	16.00	1	14.42
					1RB Mid	1 Pos 38	16.00	0	15.27	16.00	1	14.62
					1RB High	1 Pos 74	16.00	0	15.30	16.00	1	14.66
					50% RB Low	38 Pos 0	16.00	1	14.19	16.00	2	13.14
		41055	2636.5	2680.0	50% RB Mid	38 Pos 19	16.00	1	14.21	16.00	2	13.21
					50% RB High	38 Pos 39	16.00	1	14.30	16.00	2	13.27
					100% RB	75 Pos 0	16.00	1	14.30	16.00	2	13.25
					1RB Low	1 Pos 0	16.00	0	15.74	16.00	1	13.97
					1RB Mid	1 Pos 38	16.00	0	15.97	16.00	1	14.19
					1RB High	1 Pos 74	16.00	0	14.96	16.00	1	14.30
		41490	2680.0	2680.0	50% RB Low	38 Pos 0	16.00	1	14.80	16.00	2	13.80
					50% RB Mid	38 Pos 19	16.00	1	14.91	16.00	2	13.92
					50% RB High	38 Pos 39	16.00	1	14.99	16.00	2	14.00
					100% RB	75 Pos 0	16.00	1	14.92	16.00	2	13.92
					1RB Low	1 Pos 0	16.00	0	15.33	16.00	1	14.69
					1RB Mid	1 Pos 38	16.00	0	15.29	16.00	1	14.64
		41490	2680.0	2680.0	1RB High	1 Pos 74	16.00	0	15.24	16.00	1	14.55
					50% RB Low	38 Pos 0	16.00	1	14.36	16.00	2	13.32
					50% RB Mid	38 Pos 19	16.00	1	14.22	16.00	2	13.24
					50% RB High	38 Pos 39	16.00	1	14.30	16.00	2	13.29
					100% RB	75 Pos 0	16.00	1	14.32	16.00	2	13.27

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM			
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	
LTE41	10 MHz	39750	2506	1RB Low	1 Pos 0	16.00	0	15.59	16.00	1	14.95	
				1RB Mid	1 Pos 24	16.00	0	15.50	16.00	1	14.79	
				1RB High	1 Pos 49	16.00	0	15.26	16.00	1	14.53	
				50% RB Low	25 Pos 0	16.00	1	14.54	16.00	2	13.58	
				50% RB Mid	25 Pos 12	16.00	1	14.44	16.00	2	13.54	
				50% RB High	25 Pos 24	16.00	1	14.37	16.00	2	13.42	
		40185	2549.5	2593	100% RB	50 Pos 0	16.00	1	14.45	16.00	2	13.46
					1RB Low	1 Pos 0	16.00	0	14.73	16.00	1	14.04
					1RB Mid	1 Pos 24	16.00	0	14.65	16.00	1	13.99
					1RB High	1 Pos 49	16.00	0	14.71	16.00	1	13.99
					50% RB Low	25 Pos 0	16.00	1	13.81	16.00	2	12.79
					50% RB Mid	25 Pos 12	16.00	1	13.62	16.00	2	12.78
		40620	2593	2636.5	50% RB High	25 Pos 24	16.00	1	13.65	16.00	2	12.72
					100% RB	50 Pos 0	16.00	0	15.59	16.00	1	14.95
					1RB Low	1 Pos 0	16.00	0	15.18	16.00	1	14.50
					1RB Mid	1 Pos 24	16.00	0	15.33	16.00	1	14.64
					1RB High	1 Pos 49	16.00	0	15.33	16.00	1	14.67
					50% RB Low	25 Pos 0	16.00	1	14.20	16.00	2	13.26
		41055	2636.5	2680	50% RB Mid	25 Pos 12	16.00	1	14.23	16.00	2	13.31
					100% RB	50 Pos 0	16.00	1	14.30	16.00	2	13.35
					1RB Low	1 Pos 0	16.00	1	14.30	16.00	2	13.21
					1RB Mid	1 Pos 24	16.00	0	15.83	16.00	1	14.11
					1RB High	1 Pos 49	16.00	0	16.00	16.00	1	14.24
					50% RB Low	25 Pos 0	16.00	0	14.96	16.00	1	14.26
		41490	2680	2680	50% RB Mid	25 Pos 12	16.00	1	14.90	16.00	2	13.98
					100% RB	50 Pos 0	16.00	1	14.90	16.00	2	13.99
					1RB Low	1 Pos 0	16.00	1	14.96	16.00	2	13.00
					1RB Mid	1 Pos 24	16.00	1	14.98	16.00	2	13.92
					1RB High	1 Pos 49	16.00	0	15.32	16.00	1	14.64
					50% RB Low	25 Pos 0	16.00	0	15.32	16.00	1	14.63
		41490	2680	2680	50% RB Mid	25 Pos 12	16.00	0	15.28	16.00	1	14.62
					100% RB	50 Pos 0	16.00	1	14.28	16.00	2	13.34
					1RB Low	1 Pos 0	16.00	1	14.25	16.00	2	13.32
					1RB Mid	1 Pos 24	16.00	1	14.29	16.00	2	13.37
		41490	2680	2680	1RB High	1 Pos 49	16.00	1	14.31	16.00	2	13.30

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM			
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	
LTE41	5.0 MHz	39750	2506	1RB Low	1 Pos 0	16.00	0	15.56	16.00	1	14.96	
				1RB Mid	1 Pos 12	16.00	0	15.52	16.00	1	14.85	
				1RB High	1 Pos 24	16.00	0	15.39	16.00	1	14.74	
				50% RB Low	12 Pos 0	16.00	1	14.49	16.00	2	13.44	
				50% RB Mid	12 Pos 6	16.00	1	14.47	16.00	2	13.39	
				50% RB High	12 Pos 11	16.00	1	14.44	16.00	2	13.34	
		40185	2549.5	2593	100% RB	25 Pos 0	16.00	1	14.48	16.00	2	13.45
					1RB Low	1 Pos 0	16.00	0	14.80	16.00	1	14.07
					1RB Mid	1 Pos 12	16.00	0	14.71	16.00	1	14.04
					1RB High	1 Pos 24	16.00	0	14.71	16.00	1	14.03
					50% RB Low	12 Pos 0	16.00	1	13.73	16.00	2	12.61
					50% RB Mid	12 Pos 6	16.00	1	13.68	16.00	2	12.58
		40620	2593	2636.5	50% RB High	12 Pos 11	16.00	1	13.66	16.00	2	12.58
					100% RB	25 Pos 0	16.00	1	13.69	16.00	2	12.71
					1RB Low	1 Pos 0	16.00	0	15.22	16.00	1	14.71
					1RB Mid	1 Pos 12	16.00	0	15.26	16.00	1	14.75
					1RB High	1 Pos 24	16.00	0	15.26	16.00	1	14.71
					50% RB Low	12 Pos 0	16.00	1	14.29	16.00	2	13.20
		41055	2636.5	2680	50% RB Mid	12 Pos 6	16.00	1	14.28	16.00	2	13.18
					50% RB High	12 Pos 11	16.00	1	14.28	16.00	2	13.19
					100% RB	25 Pos 0	16.00	1	14.31	16.00	2	13.28
					1RB Low	1 Pos 0	16.00	0	15.89	16.00	1	14.16
					1RB Mid	1 Pos 12	16.00	0	16.00	16.00	1	14.28
					1RB High	1 Pos 24	16.00	0	15.02	16.00	1	14.30
		41490	2680	2724	50% RB Low	12 Pos 0	16.00	1	14.94	16.00	2	13.86
					50% RB Mid	12 Pos 6	16.00	1	14.92	16.00	2	13.85
					50% RB High	12 Pos 11	16.00	1	15.00	16.00	2	13.89
					100% RB	25 Pos 0	16.00	1	14.98	16.00	2	13.93
					1RB Low	1 Pos 0	16.00	0	15.26	16.00	1	14.67
					1RB Mid	1 Pos 12	16.00	0	15.21	16.00	1	14.70
		41490	2680	2768	1RB High	1 Pos 24	16.00	0	15.25	16.00	1	14.68
					50% RB Low	12 Pos 0	16.00	1	14.30	16.00	2	13.21
					50% RB Mid	12 Pos 6	16.00	1	14.29	16.00	2	13.19
					50% RB High	12 Pos 11	16.00	1	14.29	16.00	2	13.23
					100% RB	25 Pos 0	16.00	1	14.30	16.00	2	13.27

B.2.2.31 LTE Band 41 TDD – Tablet Mode – Antenna 8

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE41	20 MHz	39750	2506	1RB Low	1 Pos 0	17.50	0	16.17	17.50	1	15.34
				1RB Mid	1 Pos 50	17.50	0	16.25	17.50	1	15.41
				1RB High	1 Pos 99	17.50	0	16.11	17.50	1	15.33
				50% RB Low	50 Pos 0	17.50	1	15.21	17.50	2	14.31
				50% RB Mid	50 Pos 24	17.50	1	15.30	17.50	2	14.30
				50% RB High	50 Pos 50	17.50	1	15.25	17.50	2	14.26
		100% RB	100 Pos 0	17.50	1	15.18	17.50	2	14.28		
		40185	2549.5	1RB Low	1 Pos 0	17.50	0	16.01	17.50	1	15.21
				1RB Mid	1 Pos 50	17.50	0	16.16	17.50	1	15.37
				1RB High	1 Pos 99	17.50	0	16.20	17.50	1	15.38
				50% RB Low	50 Pos 0	17.50	1	15.18	17.50	2	14.23
				50% RB Mid	50 Pos 24	17.50	1	15.20	17.50	2	14.23
				50% RB High	50 Pos 50	17.50	1	15.17	17.50	2	14.22
		100% RB	100 Pos 0	17.50	1	15.19	17.50	2	14.27		
		40620	2593	1RB Low	1 Pos 0	17.50	0	16.33	17.50	1	15.51
				1RB Mid	1 Pos 50	17.50	0	16.50	17.50	1	15.63
				1RB High	1 Pos 99	17.50	0	16.44	17.50	1	15.60
				50% RB Low	50 Pos 0	17.50	1	15.41	17.50	2	14.49
				50% RB Mid	50 Pos 24	17.50	1	15.46	17.50	2	14.47
				50% RB High	50 Pos 50	17.50	1	15.41	17.50	2	14.48
		100% RB	100 Pos 0	17.50	1	15.43	17.50	2	14.48		
		41055	2636.5	1RB Low	1 Pos 0	17.50	0	16.22	17.50	1	15.43
				1RB Mid	1 Pos 50	17.50	0	16.25	17.50	1	15.41
				1RB High	1 Pos 99	17.50	0	15.99	17.50	1	15.20
				50% RB Low	50 Pos 0	17.50	1	15.27	17.50	2	14.34
				50% RB Mid	50 Pos 24	17.50	1	15.20	17.50	2	14.25
				50% RB High	50 Pos 50	17.50	1	15.12	17.50	2	14.15
		100% RB	100 Pos 0	17.50	1	15.18	17.50	2	14.21		
		41490	2680	1RB Low	1 Pos 0	17.50	0	16.00	17.50	1	15.19
				1RB Mid	1 Pos 50	17.50	0	16.17	17.50	1	15.36
				1RB High	1 Pos 99	17.50	0	16.04	17.50	1	15.23
				50% RB Low	50 Pos 0	17.50	1	15.12	17.50	2	14.19
				50% RB Mid	50 Pos 24	17.50	1	15.12	17.50	2	14.23
				50% RB High	50 Pos 50	17.50	1	15.10	17.50	2	14.19
		100% RB	100 Pos 0	17.50	1	15.13	17.50	2	14.13		

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM			
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	
LTE41	15 MHz	39750	2506	1RB Low	1 Pos 0	17.50	0	16.17	17.50	1	15.50	
				1RB Mid	1 Pos 38	17.50	0	16.22	17.50	1	15.55	
				1RB High	1 Pos 74	17.50	0	16.13	17.50	1	15.53	
				50% RB Low	38 Pos 0	17.50	1	15.26	17.50	2	14.26	
				50% RB Mid	38 Pos 19	17.50	1	15.19	17.50	2	14.23	
				50% RB High	38 Pos 39	17.50	1	15.18	17.50	2	14.25	
		40185	2549.5	2593	100% RB	75 Pos 0	17.50	1	15.24	17.50	2	14.27
					1RB Low	1 Pos 0	17.50	0	16.06	17.50	1	15.41
					1RB Mid	1 Pos 38	17.50	0	16.10	17.50	1	15.45
					1RB High	1 Pos 74	17.50	0	16.16	17.50	1	15.48
					50% RB Low	38 Pos 0	17.50	1	15.17	17.50	2	14.20
					50% RB Mid	38 Pos 19	17.50	1	15.13	17.50	2	14.18
		40620	2593	2636.5	50% RB High	38 Pos 39	17.50	1	15.11	17.50	2	14.24
					100% RB	75 Pos 0	17.50	1	15.16	17.50	2	14.28
					1RB Low	1 Pos 0	17.50	0	16.36	17.50	1	15.74
					1RB Mid	1 Pos 38	17.50	0	16.36	17.50	1	15.73
					1RB High	1 Pos 74	17.50	0	16.33	17.50	1	15.68
					50% RB Low	38 Pos 0	17.50	1	15.37	17.50	2	14.51
		41055	2636.5	2680.0	50% RB Mid	38 Pos 19	17.50	1	15.41	17.50	2	14.49
					50% RB High	38 Pos 39	17.50	1	15.41	17.50	2	14.50
					100% RB	75 Pos 0	17.50	1	15.44	17.50	2	14.54
					1RB Low	1 Pos 0	17.50	0	16.22	17.50	1	15.57
					1RB Mid	1 Pos 38	17.50	0	16.18	17.50	1	15.51
					1RB High	1 Pos 74	17.50	0	15.97	17.50	1	15.32
		41490	2680.0	2680.0	50% RB Low	38 Pos 0	17.50	1	15.24	17.50	2	14.24
					50% RB Mid	38 Pos 19	17.50	1	15.16	17.50	2	14.26
					50% RB High	38 Pos 39	17.50	1	15.09	17.50	2	14.19
					100% RB	75 Pos 0	17.50	1	15.22	17.50	2	14.25
					1RB Low	1 Pos 0	17.50	0	16.06	17.50	1	15.39
					1RB Mid	1 Pos 38	17.50	0	16.13	17.50	1	15.45
		41490	2680.0	2680.0	1RB High	1 Pos 74	17.50	0	16.08	17.50	1	15.41
					50% RB Low	38 Pos 0	17.50	1	15.09	17.50	2	14.14
					50% RB Mid	38 Pos 19	17.50	1	15.08	17.50	2	14.16
					50% RB High	38 Pos 39	17.50	1	15.04	17.50	2	14.11
					100% RB	75 Pos 0	17.50	1	15.11	17.50	2	14.14

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM			
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	
LTE41	10 MHz	39750	2506	1RB Low	1 Pos 0	17.50	0	16.25	17.50	1	15.57	
				1RB Mid	1 Pos 24	17.50	0	16.28	17.50	1	15.58	
				1RB High	1 Pos 49	17.50	0	16.19	17.50	1	15.55	
				50% RB Low	25 Pos 0	17.50	1	15.22	17.50	2	14.41	
				50% RB Mid	25 Pos 12	17.50	1	15.23	17.50	2	14.39	
				50% RB High	25 Pos 24	17.50	1	15.17	17.50	2	14.33	
		40185	2549.5	2593	1RB Low	1 Pos 0	17.50	0	16.16	17.50	1	15.49
					1RB Mid	1 Pos 24	17.50	0	16.16	17.50	1	15.47
					1RB High	1 Pos 49	17.50	0	16.26	17.50	1	15.56
					50% RB Low	25 Pos 0	17.50	1	15.18	17.50	2	14.35
					50% RB Mid	25 Pos 12	17.50	1	15.17	17.50	2	14.27
					50% RB High	25 Pos 24	17.50	1	15.16	17.50	2	14.33
		40620	2593	2636.5	100% RB	50 Pos 0	17.50	1	15.22	17.50	2	14.28
					1RB Low	1 Pos 0	17.50	0	16.45	17.50	1	15.76
					1RB Mid	1 Pos 24	17.50	0	16.46	17.50	1	15.74
					1RB High	1 Pos 49	17.50	0	16.44	17.50	1	15.78
					50% RB Low	25 Pos 0	17.50	1	15.39	17.50	2	14.51
					50% RB Mid	25 Pos 12	17.50	1	15.39	17.50	2	14.53
		41055	2636.5	2680	100% RB	50 Pos 0	17.50	1	15.36	17.50	2	14.55
					1RB Low	1 Pos 0	17.50	1	15.45	17.50	2	14.48
					1RB Mid	1 Pos 24	17.50	0	16.28	17.50	1	15.63
					1RB High	1 Pos 49	17.50	0	16.22	17.50	1	15.52
					50% RB Low	25 Pos 0	17.50	0	16.15	17.50	1	15.45
					50% RB Mid	25 Pos 12	17.50	1	15.22	17.50	2	14.35
		41490	2680	2726	100% RB	50 Pos 0	17.50	1	15.16	17.50	2	14.29
					1RB Low	1 Pos 0	17.50	1	15.14	17.50	2	14.26
					1RB Mid	1 Pos 24	17.50	1	15.21	17.50	2	14.29
					1RB High	1 Pos 49	17.50	0	16.08	17.50	1	15.42
					50% RB Low	25 Pos 0	17.50	0	16.14	17.50	1	15.46
					50% RB Mid	25 Pos 12	17.50	0	16.10	17.50	1	15.43
		41490	2680	2772	100% RB	50 Pos 0	17.50	1	15.05	17.50	2	14.27
					1RB Low	1 Pos 0	17.50	1	15.08	17.50	2	14.26
					1RB Mid	1 Pos 24	17.50	1	15.10	17.50	2	14.22
					1RB High	1 Pos 49	17.50	1	15.11	17.50	2	14.15

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM			
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	
LTE41	5.0 MHz	39750	2506	1RB Low	1 Pos 0	17.50	0	16.33	17.50	1	15.47	
				1RB Mid	1 Pos 12	17.50	0	16.30	17.50	1	15.44	
				1RB High	1 Pos 24	17.50	0	16.30	17.50	1	15.42	
				50% RB Low	12 Pos 0	17.50	1	15.23	17.50	2	14.25	
				50% RB Mid	12 Pos 6	17.50	1	15.24	17.50	2	14.22	
				50% RB High	12 Pos 11	17.50	1	15.20	17.50	2	14.24	
		40185	2549.5	2593	100% RB	25 Pos 0	17.50	1	15.20	17.50	2	14.23
					1RB Low	1 Pos 0	17.50	0	16.19	17.50	1	15.56
					1RB Mid	1 Pos 12	17.50	0	16.23	17.50	1	15.48
					1RB High	1 Pos 24	17.50	0	16.26	17.50	1	15.55
					50% RB Low	12 Pos 0	17.50	1	15.14	17.50	2	14.18
					50% RB Mid	12 Pos 6	17.50	1	15.11	17.50	2	14.14
		40620	2593	2636.5	50% RB High	12 Pos 11	17.50	1	15.08	17.50	2	14.13
					100% RB	25 Pos 0	17.50	1	15.17	17.50	2	14.25
					1RB Low	1 Pos 0	17.50	0	16.44	17.50	1	15.93
					1RB Mid	1 Pos 12	17.50	0	16.44	17.50	1	15.89
					1RB High	1 Pos 24	17.50	0	16.41	17.50	1	15.82
					50% RB Low	12 Pos 0	17.50	1	15.43	17.50	2	14.45
		41055	2636.5	2680	50% RB Mid	12 Pos 6	17.50	1	15.37	17.50	2	14.44
					50% RB High	12 Pos 11	17.50	1	15.44	17.50	2	14.41
					100% RB	25 Pos 0	17.50	1	15.45	17.50	2	14.53
					1RB Low	1 Pos 0	17.50	0	16.23	17.50	1	15.58
					1RB Mid	1 Pos 12	17.50	0	16.25	17.50	1	15.58
					1RB High	1 Pos 24	17.50	0	16.21	17.50	1	15.55
		41490	2680	2724	50% RB Low	12 Pos 0	17.50	1	15.19	17.50	2	14.23
					50% RB Mid	12 Pos 6	17.50	1	15.14	17.50	2	14.18
					50% RB High	12 Pos 11	17.50	1	15.19	17.50	2	14.18
					100% RB	25 Pos 0	17.50	1	15.20	17.50	2	14.29
					1RB Low	1 Pos 0	17.50	0	16.12	17.50	1	15.48
					1RB Mid	1 Pos 12	17.50	0	16.09	17.50	1	15.55
		41490	2680	2768	1RB High	1 Pos 24	17.50	0	16.15	17.50	1	15.54
					50% RB Low	12 Pos 0	17.50	1	15.04	17.50	2	14.13
					50% RB Mid	12 Pos 6	17.50	1	15.10	17.50	2	14.09
					50% RB High	12 Pos 11	17.50	1	15.10	17.50	2	14.11
					100% RB	25 Pos 0	17.50	1	15.11	17.50	2	14.15

B.2.2.32 LTE Band 48 TDD – Laptop Mode – Antenna 8

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 48	20 MHz	55340	3560	1RB Low	1 Pos 0	15.50	0	14.09	15.50	1	13.68
				1RB Mid	1 Pos 50	15.50	0	14.18	15.50	1	13.73
				1RB High	1 Pos 99	15.50	0	14.12	15.50	1	13.70
				50% RB Low	50 Pos 0	15.50	1	13.06	15.50	2	12.06
				50% RB Mid	50 Pos 24	15.50	1	13.09	15.50	2	12.08
				50% RB High	50 Pos 50	15.50	1	13.07	15.50	2	12.07
		100% RB	100 Pos 0	15.50	1	13.12	15.50	2	12.00		
		55990	3625	1RB Low	1 Pos 0	15.50	0	13.96	15.50	1	13.57
				1RB Mid	1 Pos 50	15.50	0	13.67	15.50	1	13.55
				1RB High	1 Pos 99	15.50	0	13.90	15.50	1	13.48
				50% RB Low	50 Pos 0	15.50	1	12.95	15.50	2	11.95
				50% RB Mid	50 Pos 24	15.50	1	12.67	15.50	2	11.89
				50% RB High	50 Pos 50	15.50	1	12.91	15.50	2	11.91
		100% RB	100 Pos 0	15.50	1	12.92	15.50	2	11.82		
		56640	3690	1RB Low	1 Pos 0	15.50	0	14.10	15.50	1	13.66
				1RB Mid	1 Pos 50	15.50	0	14.11	15.50	1	13.68
				1RB High	1 Pos 99	15.50	0	14.05	15.50	1	13.64
				50% RB Low	50 Pos 0	15.50	1	13.11	15.50	2	12.09
	50% RB Mid			50 Pos 24	15.50	1	13.07	15.50	2	12.07	
	50% RB High			50 Pos 50	15.50	1	13.07	15.50	2	12.06	
	100% RB	100 Pos 0	15.50	1	13.09	15.50	2	11.99			
	15 MHz	55315	3557.5	1RB Low	1 Pos 0	15.50	0	14.09	15.50	1	13.68
				1RB Mid	1 Pos 38	15.50	0	14.18	15.50	1	13.73
				1RB High	1 Pos 74	15.50	0	14.12	15.50	1	13.70
				50% RB Low	38 Pos 0	15.50	1	13.06	15.50	2	12.06
				50% RB Mid	38 Pos 19	15.50	1	13.09	15.50	2	12.08
				50% RB High	38 Pos 39	15.50	1	13.07	15.50	2	12.07
		100% RB	75 Pos 0	15.50	1	13.12	15.50	2	12.00		
		55990	3625	1RB Low	1 Pos 0	15.50	0	13.96	15.50	1	13.57
				1RB Mid	1 Pos 38	15.50	0	14.00	15.50	1	13.55
				1RB High	1 Pos 74	15.50	0	13.90	15.50	1	13.48
				50% RB Low	38 Pos 0	15.50	1	12.95	15.50	2	11.95
				50% RB Mid	38 Pos 19	15.50	1	12.91	15.50	2	11.89
				50% RB High	38 Pos 39	15.50	1	12.91	15.50	2	11.91
		100% RB	75 Pos 0	15.50	1	12.92	15.50	2	11.82		
		56665	3692.5	1RB Low	1 Pos 0	15.50	0	14.10	15.50	1	13.66
				1RB Mid	1 Pos 38	15.50	0	14.11	15.50	1	13.68
				1RB High	1 Pos 74	15.50	0	14.05	15.50	1	13.64
				50% RB Low	38 Pos 0	15.50	1	13.11	15.50	2	12.09
	50% RB Mid			38 Pos 19	15.50	1	13.07	15.50	2	12.07	
	50% RB High			38 Pos 39	15.50	1	13.07	15.50	2	12.06	
	100% RB	75 Pos 0	15.50	1	13.09	15.50	2	11.99			
	10 MHz	55290	3555	1RB Low	1 Pos 0	15.50	0	14.09	15.50	1	13.68
				1RB Mid	1 Pos 24	15.50	0	14.18	15.50	1	13.73
				1RB High	1 Pos 49	15.50	0	14.12	15.50	1	13.70
				50% RB Low	25 Pos 0	15.50	1	13.06	15.50	2	12.06
				50% RB Mid	25 Pos 12	15.50	1	13.09	15.50	2	12.08
				50% RB High	25 Pos 25	15.50	1	13.07	15.50	2	12.07
100% RB		50 Pos0	15.50	1	13.12	15.50	2	12.00			
55990		3625	1RB Low	1 Pos 0	15.50	0	13.96	15.50	1	13.57	
			1RB Mid	1 Pos 24	15.50	0	14.00	15.50	1	13.55	
			1RB High	1 Pos 49	15.50	0	13.90	15.50	1	13.48	
			50% RB Low	25 Pos 0	15.50	1	12.95	15.50	2	11.95	
			50% RB Mid	25 Pos 12	15.50	1	12.91	15.50	2	11.89	
			50% RB High	25 Pos 25	15.50	1	12.91	15.50	2	11.91	
100% RB		50 Pos0	15.50	1	12.92	15.50	2	11.82			
56690		3695	1RB Low	1 Pos 0	15.50	0	14.10	15.50	1	13.66	
			1RB Mid	1 Pos 24	15.50	0	14.11	15.50	1	13.68	
			1RB High	1 Pos 49	15.50	0	14.05	15.50	1	13.64	
			50% RB Low	25 Pos 0	15.50	1	13.11	15.50	2	12.09	
	50% RB Mid		25 Pos 12	15.50	1	13.07	15.50	2	12.07		
	50% RB High		25 Pos 25	15.50	1	13.07	15.50	2	12.06		
100% RB	50 Pos0	15.50	1	13.09	15.50	2	11.99				

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 48	5 MHz	55265	3552.5	1RB Low	1 Pos 0	15.50	0	14.09	15.50	1	13.68
				1RB Mid	1 Pos 12	15.50	0	14.18	15.50	1	13.73
				1RB High	1 Pos 24	15.50	0	14.12	15.50	1	13.70
				50% RB Low	12 Pos 0	15.50	1	13.06	15.50	2	12.06
				50% RB Mid	12 Pos 6	15.50	1	13.09	15.50	2	12.08
				50% RB High	12 Pos 11	15.50	1	13.07	15.50	2	12.07
		55990	3625	100% RB	25 Pos 0	15.50	1	13.12	15.50	2	12.00
				1RB Low	1 Pos 0	15.50	0	13.96	15.50	1	13.57
				1RB Mid	1 Pos 12	15.50	0	14.00	15.50	1	13.55
				1RB High	1 Pos 24	15.50	0	13.90	15.50	1	13.48
				50% RB Low	12 Pos 0	15.50	1	12.95	15.50	2	11.95
				50% RB Mid	12 Pos 6	15.50	1	12.91	15.50	2	11.89
		56715	3697.5	50% RB High	12 Pos 11	15.50	1	12.91	15.50	2	11.91
				100% RB	25 Pos 0	15.50	1	12.92	15.50	2	11.82
				1RB Low	1 Pos 0	15.50	0	14.10	15.50	1	13.66
				1RB Mid	1 Pos 12	15.50	0	14.11	15.50	1	13.68
				1RB High	1 Pos 24	15.50	0	14.05	15.50	1	13.64
				50% RB Low	12 Pos 0	15.50	1	13.11	15.50	2	12.09
		50% RB Mid	12 Pos 6	15.50	1	13.07	15.50	2	12.07		
		50% RB High	12 Pos 11	15.50	1	13.07	15.50	2	12.06		
		100% RB	25 Pos 0	15.50	1	13.09	15.50	2	11.99		

B.2.2.33 LTE Band 48 TDD – Tablet Mode – Antenna 8

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 48	20 MHz	55340	3560	1RB Low	1 Pos 0	14.00	0	13.02	14.00	1	12.34
				1RB Mid	1 Pos 50	14.00	0	13.11	14.00	1	12.55
				1RB High	1 Pos 99	14.00	0	13.14	14.00	1	12.48
				50% RB Low	50 Pos 0	14.00	1	12.08	14.00	2	11.11
				50% RB Mid	50 Pos 24	14.00	1	12.13	14.00	2	11.18
				50% RB High	50 Pos 50	14.00	1	12.11	14.00	2	11.15
		100% RB	100 Pos 0	14.00	1	12.12	14.00	2	11.14		
		55990	3625	1RB Low	1 Pos 0	14.00	0	13.08	14.00	1	12.34
				1RB Mid	1 Pos 50	14.00	0	13.17	14.00	1	12.51
				1RB High	1 Pos 99	14.00	0	13.04	14.00	1	12.37
				50% RB Low	50 Pos 0	14.00	1	12.13	14.00	2	10.10
				50% RB Mid	50 Pos 24	14.00	1	12.10	14.00	2	11.13
				50% RB High	50 Pos 50	14.00	1	12.13	14.00	2	11.11
		100% RB	100 Pos 0	14.00	1	12.10	14.00	2	11.11		
		56640	3690	1RB Low	1 Pos 0	14.00	0	13.01	14.00	1	12.15
				1RB Mid	1 Pos 50	14.00	0	13.00	14.00	1	12.11
				1RB High	1 Pos 99	14.00	0	12.69	14.00	1	11.86
				50% RB Low	50 Pos 0	14.00	1	12.14	14.00	2	11.06
	50% RB Mid			50 Pos 24	14.00	1	12.04	14.00	2	11.02	
	50% RB High			50 Pos 50	14.00	1	11.91	14.00	2	10.91	
	100% RB	100 Pos 0	14.00	1	12.03	14.00	2	11.01			
	15 MHz	55315	3557.5	1RB Low	1 Pos 0	14.00	0	12.98	14.00	1	12.31
				1RB Mid	1 Pos 38	14.00	0	13.10	14.00	1	12.37
				1RB High	1 Pos 74	14.00	0	13.05	14.00	1	12.35
				50% RB Low	38 Pos 0	14.00	1	12.06	14.00	2	11.03
				50% RB Mid	38 Pos 19	14.00	1	12.08	14.00	2	11.04
				50% RB High	38 Pos 39	14.00	1	12.04	14.00	2	11.01
		100% RB	75 Pos 0	14.00	1	12.07	14.00	2	11.09		
		55990	3625	1RB Low	1 Pos 0	14.00	0	13.03	14.00	1	12.63
				1RB Mid	1 Pos 38	14.00	0	13.07	14.00	1	12.69
				1RB High	1 Pos 74	14.00	0	13.01	14.00	1	12.63
				50% RB Low	38 Pos 0	14.00	1	12.01	14.00	2	11.05
				50% RB Mid	38 Pos 19	14.00	1	12.07	14.00	2	11.06
				50% RB High	38 Pos 39	14.00	1	12.03	14.00	2	11.07
		100% RB	75 Pos 0	14.00	1	12.08	14.00	2	11.02		
		56665	3692.5	1RB Low	1 Pos 0	14.00	0	13.01	14.00	1	12.23
				1RB Mid	1 Pos 38	14.00	0	12.96	14.00	1	12.20
				1RB High	1 Pos 74	14.00	0	12.78	14.00	1	12.04
				50% RB Low	38 Pos 0	14.00	1	11.94	14.00	2	11.06
	50% RB Mid			38 Pos 19	14.00	1	11.94	14.00	2	10.99	
	50% RB High			38 Pos 39	14.00	1	11.82	14.00	2	10.93	
	100% RB	75 Pos 0	14.00	1	11.96	14.00	2	10.98			
	10 MHz	55290	3555	1RB Low	1 Pos 0	14.00	0	13.04	14.00	1	11.95
				1RB Mid	1 Pos 24	14.00	0	13.05	14.00	1	11.98
				1RB High	1 Pos 49	14.00	0	13.04	14.00	1	11.97
				50% RB Low	25 Pos 0	14.00	1	12.07	14.00	2	11.06
				50% RB Mid	25 Pos 12	14.00	1	12.05	14.00	2	10.99
				50% RB High	25 Pos 25	14.00	1	12.09	14.00	2	11.04
100% RB		50 Pos0	14.00	1	12.10	14.00	2	11.06			
55990		3625	1RB Low	1 Pos 0	14.00	0	13.05	14.00	1	12.23	
			1RB Mid	1 Pos 24	14.00	0	13.07	14.00	1	12.27	
			1RB High	1 Pos 49	14.00	0	13.08	14.00	1	12.32	
			50% RB Low	25 Pos 0	14.00	1	12.09	14.00	2	11.03	
			50% RB Mid	25 Pos 12	14.00	1	12.06	14.00	2	11.02	
			50% RB High	25 Pos 25	14.00	1	12.07	14.00	2	11.02	
100% RB		50 Pos0	14.00	1	12.09	14.00	2	11.03			
56690		3695	1RB Low	1 Pos 0	14.00	0	13.12	14.00	1	12.25	
			1RB Mid	1 Pos 24	14.00	0	13.02	14.00	1	12.19	
			1RB High	1 Pos 49	14.00	0	12.87	14.00	1	12.09	
			50% RB Low	25 Pos 0	14.00	1	11.98	14.00	2	10.98	
	50% RB Mid		25 Pos 12	14.00	1	11.95	14.00	2	10.92		
	50% RB High		25 Pos 25	14.00	1	11.95	14.00	2	10.90		
100% RB	50 Pos0	14.00	1	11.97	14.00	2	10.96				

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 48	5 MHz	55265	3552.5	1RB Low	1 Pos 0	14.00	0	13.06	14.00	1	12.59
				1RB Mid	1 Pos 12	14.00	0	13.22	14.00	1	12.64
				1RB High	1 Pos 24	14.00	0	13.17	14.00	1	12.61
				50% RB Low	12 Pos 0	14.00	1	12.04	14.00	2	11.03
				50% RB Mid	12 Pos 6	14.00	1	12.03	14.00	2	11.02
				50% RB High	12 Pos 11	14.00	1	12.00	14.00	2	11.02
				100% RB	25 Pos 0	14.00	1	12.05	14.00	2	11.07
		55990	3625	1RB Low	1 Pos 0	14.00	0	13.01	14.00	1	12.22
				1RB Mid	1 Pos 12	14.00	0	13.04	14.00	1	12.23
				1RB High	1 Pos 24	14.00	0	12.80	14.00	1	12.12
				50% RB Low	12 Pos 0	14.00	1	11.87	14.00	2	10.94
				50% RB Mid	12 Pos 6	14.00	1	11.83	14.00	2	10.88
				50% RB High	12 Pos 11	14.00	1	11.81	14.00	2	10.86
				100% RB	25 Pos 0	14.00	1	11.85	14.00	2	10.79
		56715	3697.5	1RB Low	1 Pos 0	14.00	0	13.11	14.00	1	12.42
				1RB Mid	1 Pos 12	14.00	0	13.13	14.00	1	12.43
				1RB High	1 Pos 24	14.00	0	13.08	14.00	1	12.41
				50% RB Low	12 Pos 0	14.00	1	12.06	14.00	2	10.96
				50% RB Mid	12 Pos 6	14.00	1	12.05	14.00	2	10.95
				50% RB High	12 Pos 11	14.00	1	12.05	14.00	2	10.92
				100% RB	25 Pos 0	14.00	1	12.08	14.00	2	11.09

B.2.2.34 LTE Band 66 FDD – Laptop Mode – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE66	20 MHz	132072	1720	1RB Low	1 Pos 0	21.50	0	20.15	21.50	1	19.39
				1RB Mid	1 Pos 50	21.50	0	20.28	21.50	1	19.47
				1RB High	1 Pos 99	21.50	0	20.27	21.50	1	19.43
				50% RB Low	50 Pos 0	21.50	1	19.23	21.50	2	18.24
				50% RB Mid	50 Pos 24	21.50	1	19.30	21.50	2	18.30
				50% RB High	50 Pos 50	21.50	1	19.32	21.50	2	18.30
		100% RB	100 Pos 0	21.50	1	19.24	21.50	2	18.20		
		132322	1745	1RB Low	1 Pos 0	21.50	0	20.16	21.50	1	18.97
				1RB Mid	1 Pos 50	21.50	0	20.32	21.50	1	19.11
				1RB High	1 Pos 99	21.50	0	20.31	21.50	1	19.03
				50% RB Low	50 Pos 0	21.50	1	19.31	21.50	2	18.35
				50% RB Mid	50 Pos 24	21.50	1	19.31	21.50	2	18.35
				50% RB High	50 Pos 50	21.50	1	19.30	21.50	2	18.34
		100% RB	100 Pos 0	21.50	1	19.29	21.50	2	18.27		
		132572	1770	1RB Low	1 Pos 0	21.50	0	20.25	21.50	1	19.06
				1RB Mid	1 Pos 50	21.50	0	20.40	21.50	1	19.22
				1RB High	1 Pos 99	21.50	0	20.31	21.50	1	19.15
				50% RB Low	50 Pos 0	21.50	1	19.29	21.50	2	18.23
	50% RB Mid			50 Pos 24	21.50	1	19.33	21.50	2	18.30	
	50% RB High			50 Pos 50	21.50	1	19.35	21.50	2	18.25	
	100% RB	100 Pos 0	21.50	1	19.31	21.50	2	18.29			
	15 MHz	132047	1717.5	1RB Low	1 Pos 0	21.50	0	20.16	21.50	1	19.48
				1RB Mid	1 Pos 38	21.50	0	20.30	21.50	1	19.60
				1RB High	1 Pos 74	21.50	0	20.24	21.50	1	19.54
				50% RB Low	38 Pos 0	21.50	1	19.18	21.50	2	18.23
				50% RB Mid	38 Pos 19	21.50	1	19.25	21.50	2	18.21
				50% RB High	38 Pos 39	21.50	1	19.22	21.50	2	18.24
		100% RB	75 Pos 0	21.50	1	19.24	21.50	2	18.23		
		132422	1755	1RB Low	1 Pos 0	21.50	0	20.22	21.50	1	19.24
				1RB Mid	1 Pos 38	21.50	0	20.31	21.50	1	19.33
				1RB High	1 Pos 74	21.50	0	20.28	21.50	1	19.26
				50% RB Low	38 Pos 0	21.50	1	19.30	21.50	2	18.29
				50% RB Mid	38 Pos 19	21.50	1	19.26	21.50	2	18.27
				50% RB High	38 Pos 39	21.50	1	19.29	21.50	2	18.26
		100% RB	75 Pos 0	21.50	1	19.25	21.50	2	18.25		
		132597	1772.5	1RB Low	1 Pos 0	21.50	0	20.25	21.50	1	19.42
				1RB Mid	1 Pos 38	21.50	0	20.28	21.50	1	19.47
				1RB High	1 Pos 74	21.50	0	20.33	21.50	1	19.48
				50% RB Low	38 Pos 0	21.50	1	19.27	21.50	2	18.28
	50% RB Mid			38 Pos 19	21.50	1	19.28	21.50	2	18.40	
	50% RB High			38 Pos 39	21.50	1	19.34	21.50	2	18.39	
	100% RB	75 Pos 0	21.50	1	19.33	21.50	2	18.28			
	10 MHz	132022	1715	1RB Low	1 Pos 0	21.50	0	20.24	21.50	1	19.53
				1RB Mid	1 Pos 24	21.50	0	20.32	21.50	1	19.62
				1RB High	1 Pos 49	21.50	0	20.30	21.50	1	19.59
				50% RB Low	25 Pos 0	21.50	1	19.21	21.50	2	18.28
				50% RB Mid	25 Pos 12	21.50	1	19.23	21.50	2	18.36
				50% RB High	25 Pos 24	21.50	1	19.28	21.50	2	18.38
100% RB		50 Pos 0	21.50	1	19.31	21.50	2	18.27			
132422		1755	1RB Low	1 Pos 0	21.50	0	20.32	21.50	1	19.13	
			1RB Mid	1 Pos 24	21.50	0	20.35	21.50	1	19.18	
			1RB High	1 Pos 49	21.50	0	20.34	21.50	1	19.22	
			50% RB Low	25 Pos 0	21.50	1	19.27	21.50	2	18.35	
			50% RB Mid	25 Pos 12	21.50	1	19.25	21.50	2	18.26	
			50% RB High	25 Pos 24	21.50	1	19.33	21.50	2	18.31	
100% RB		50 Pos 0	21.50	1	19.36	21.50	2	18.34			
132622		1775	1RB Low	1 Pos 0	21.50	0	20.30	21.50	1	19.46	
			1RB Mid	1 Pos 24	21.50	0	20.31	21.50	1	19.43	
			1RB High	1 Pos 49	21.50	0	20.36	21.50	1	19.48	
			50% RB Low	25 Pos 0	21.50	1	19.34	21.50	2	18.34	
	50% RB Mid		25 Pos 12	21.50	1	19.27	21.50	2	18.34		
	50% RB High		25 Pos 24	21.50	1	19.31	21.50	2	18.33		
100% RB	50 Pos 0	21.50	1	19.34	21.50	2	18.31				

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE66	5.0 MHz	131997	1712.5	1RB Low	1 Pos 0	21.50	0	20.29	21.50	1	19.59
				1RB Mid	1 Pos 12	21.50	0	20.31	21.50	1	19.55
				1RB High	1 Pos 24	21.50	0	20.40	21.50	1	19.64
				50% RB Low	12 Pos 0	21.50	1	19.24	21.50	2	18.24
				50% RB Mid	12 Pos 6	21.50	1	19.28	21.50	2	18.25
				50% RB High	12 Pos 11	21.50	1	19.25	21.50	2	18.27
		100% RB	25 Pos 0	21.50	1	19.29	21.50	2	18.31		
		132422	1755	1RB Low	1 Pos 0	21.50	0	20.25	21.50	1	19.49
				1RB Mid	1 Pos 12	21.50	0	20.26	21.50	1	19.53
				1RB High	1 Pos 24	21.50	0	20.32	21.50	1	19.59
				50% RB Low	12 Pos 0	21.50	1	19.34	21.50	2	18.34
				50% RB Mid	12 Pos 6	21.50	1	19.28	21.50	2	18.29
				50% RB High	12 Pos 11	21.50	1	19.25	21.50	2	18.27
		100% RB	25 Pos 0	21.50	1	19.30	21.50	2	18.33		
		132647	1777.5	1RB Low	1 Pos 0	21.50	0	20.27	21.50	1	19.52
				1RB Mid	1 Pos 12	21.50	0	20.35	21.50	1	19.56
				1RB High	1 Pos 24	21.50	0	20.35	21.50	1	19.54
				50% RB Low	12 Pos 0	21.50	1	19.39	21.50	2	18.32
	50% RB Mid			12 Pos 6	21.50	1	19.34	21.50	2	18.30	
	50% RB High			12 Pos 11	21.50	1	19.34	21.50	2	18.24	
	100% RB	25 Pos 0	21.50	1	19.33	21.50	2	18.30			
	3.0 MHz	131987	1711.5	1RB Low	1 Pos 0	21.50	0	20.21	21.50	1	19.51
				1RB Mid	1 Pos 7	21.50	0	20.21	21.50	1	19.54
				1RB High	1 Pos 14	21.50	0	20.25	21.50	1	19.59
				50% RB Low	8 Pos 0	21.50	1	19.20	21.50	2	18.24
				50% RB Mid	8 Pos 4	21.50	1	19.23	21.50	2	18.28
				50% RB High	8 Pos 7	21.50	1	19.20	21.50	2	18.25
		100% RB	15 Pos 0	21.50	1	19.25	21.50	2	18.22		
		132422	1755	1RB Low	1 Pos 0	21.50	0	20.23	21.50	1	19.55
				1RB Mid	1 Pos 7	21.50	0	20.24	21.50	1	19.57
				1RB High	1 Pos 14	21.50	0	20.22	21.50	1	19.55
				50% RB Low	8 Pos 0	21.50	1	19.26	21.50	2	18.30
				50% RB Mid	8 Pos 4	21.50	1	19.27	21.50	2	18.28
				50% RB High	8 Pos 7	21.50	1	19.26	21.50	2	18.25
		100% RB	15 Pos 0	21.50	1	19.28	21.50	2	18.24		
		132657	1778.5	1RB Low	1 Pos 0	21.50	0	20.28	21.50	1	19.60
				1RB Mid	1 Pos 7	21.50	0	20.29	21.50	1	19.62
				1RB High	1 Pos 14	21.50	0	20.31	21.50	1	19.61
				50% RB Low	8 Pos 0	21.50	1	19.34	21.50	2	18.33
	50% RB Mid			8 Pos 4	21.50	1	19.33	21.50	2	18.33	
	50% RB High			8 Pos 7	21.50	1	19.33	21.50	2	18.36	
	100% RB	15 Pos 0	21.50	1	19.33	21.50	2	18.29			
	1.4 MHz	131979	1710	1RB Low	1 Pos 0	21.50	0	20.25	21.50	1	19.25
				1RB Mid	1 Pos 2	21.50	0	20.37	21.50	1	19.37
				1RB High	1 Pos 5	21.50	0	20.31	21.50	1	19.27
				50% RB Low	3 Pos 0	21.50	0	20.22	21.50	1	19.39
				50% RB Mid	3 Pos 1	21.50	0	20.24	21.50	1	19.40
				50% RB High	3 Pos 2	21.50	0	20.23	21.50	1	19.43
100% RB		6 Pos 0	21.50	1	19.24	21.50	2	18.24			
132422		1755	1RB Low	1 Pos 0	21.50	0	20.35	21.50	1	19.28	
			1RB Mid	1 Pos 2	21.50	0	20.36	21.50	1	19.41	
			1RB High	1 Pos 5	21.50	0	20.36	21.50	1	19.32	
			50% RB Low	3 Pos 0	21.50	0	20.28	21.50	1	19.41	
			50% RB Mid	3 Pos 1	21.50	0	20.29	21.50	1	19.41	
			50% RB High	3 Pos 2	21.50	0	20.28	21.50	1	19.43	
100% RB		6 Pos 0	21.50	1	19.26	21.50	2	18.24			
132665		1779.3	1RB Low	1 Pos 0	21.50	0	20.37	21.50	1	19.36	
			1RB Mid	1 Pos 2	21.50	0	20.41	21.50	1	19.42	
			1RB High	1 Pos 5	21.50	0	20.38	21.50	1	19.34	
			50% RB Low	3 Pos 0	21.50	0	20.30	21.50	1	19.47	
	50% RB Mid		3 Pos 1	21.50	0	20.33	21.50	1	19.46		
	50% RB High		3 Pos 2	21.50	0	20.32	21.50	1	19.49		
100% RB	6 Pos 0	21.50	1	19.30	21.50	2	18.31				

B.2.2.35 LTE Band 66 FDD – Tablet Mode – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE66	20 MHz	132072	1720	1RB Low	1 Pos 0	18.00	0	17.08	18.00	1	16.31
				1RB Mid	1 Pos 50	18.00	0	17.17	18.00	1	16.41
				1RB High	1 Pos 99	18.00	0	17.16	18.00	1	16.37
				50% RB Low	50 Pos 0	18.00	1	16.13	18.00	2	15.19
				50% RB Mid	50 Pos 24	18.00	1	16.22	18.00	2	15.28
				50% RB High	50 Pos 50	18.00	1	16.19	18.00	2	15.24
		100% RB	100 Pos 0	18.00	1	16.16	18.00	2	15.16		
		132322	1745	1RB Low	1 Pos 0	18.00	0	17.03	18.00	1	16.25
				1RB Mid	1 Pos 50	18.00	0	17.20	18.00	1	16.44
				1RB High	1 Pos 99	18.00	0	17.14	18.00	1	16.34
				50% RB Low	50 Pos 0	18.00	1	16.29	18.00	2	15.34
				50% RB Mid	50 Pos 24	18.00	1	16.24	18.00	2	15.27
				50% RB High	50 Pos 50	18.00	1	16.17	18.00	2	15.23
		100% RB	100 Pos 0	18.00	1	16.22	18.00	2	15.25		
		132572	1770	1RB Low	1 Pos 0	18.00	0	17.02	18.00	1	16.25
				1RB Mid	1 Pos 50	18.00	0	17.22	18.00	1	16.45
				1RB High	1 Pos 99	18.00	0	17.16	18.00	1	16.36
				50% RB Low	50 Pos 0	18.00	1	16.15	18.00	2	15.20
	50% RB Mid			50 Pos 24	18.00	1	16.24	18.00	2	15.31	
	50% RB High			50 Pos 50	18.00	1	16.21	18.00	2	15.24	
	100% RB	100 Pos 0	18.00	1	16.17	18.00	2	15.20			
	15 MHz	132047	1717.5	1RB Low	1 Pos 0	18.00	0	17.07	18.00	1	16.38
				1RB Mid	1 Pos 38	18.00	0	17.22	18.00	1	16.50
				1RB High	1 Pos 74	18.00	0	17.16	18.00	1	16.45
				50% RB Low	38 Pos 0	18.00	1	16.12	18.00	2	15.18
				50% RB Mid	38 Pos 19	18.00	1	16.17	18.00	2	15.19
				50% RB High	38 Pos 39	18.00	1	16.17	18.00	2	15.16
		100% RB	75 Pos 0	18.00	1	16.17	18.00	2	15.17		
		132422	1755	1RB Low	1 Pos 0	18.00	0	17.06	18.00	1	16.35
				1RB Mid	1 Pos 38	18.00	0	17.16	18.00	1	16.44
				1RB High	1 Pos 74	18.00	0	17.08	18.00	1	16.41
				50% RB Low	38 Pos 0	18.00	1	16.19	18.00	2	15.24
				50% RB Mid	38 Pos 19	18.00	1	16.18	18.00	2	15.23
				50% RB High	38 Pos 39	18.00	1	16.14	18.00	2	15.15
		100% RB	75 Pos 0	18.00	1	16.20	18.00	2	15.25		
		132597	1772.5	1RB Low	1 Pos 0	18.00	0	17.11	18.00	1	16.41
				1RB Mid	1 Pos 38	18.00	0	17.19	18.00	1	16.48
				1RB High	1 Pos 74	18.00	0	17.17	18.00	1	16.47
				50% RB Low	38 Pos 0	18.00	1	16.15	18.00	2	15.20
	50% RB Mid			38 Pos 19	18.00	1	16.23	18.00	2	15.30	
	50% RB High			38 Pos 39	18.00	1	16.19	18.00	2	15.22	
	100% RB	75 Pos 0	18.00	1	16.19	18.00	2	15.27			
	10 MHz	132022	1715	1RB Low	1 Pos 0	18.00	0	17.18	18.00	1	16.45
				1RB Mid	1 Pos 24	18.00	0	17.26	18.00	1	16.54
				1RB High	1 Pos 49	18.00	0	17.22	18.00	1	16.53
				50% RB Low	25 Pos 0	18.00	1	16.13	18.00	2	15.25
				50% RB Mid	25 Pos 12	18.00	1	16.18	18.00	2	15.29
				50% RB High	25 Pos 24	18.00	1	16.18	18.00	2	15.34
100% RB		50 Pos 0	18.00	1	16.20	18.00	2	15.21			
132422		1755	1RB Low	1 Pos 0	18.00	0	17.18	18.00	1	15.99	
			1RB Mid	1 Pos 24	18.00	0	17.26	18.00	1	16.07	
			1RB High	1 Pos 49	18.00	0	17.29	18.00	1	16.08	
			50% RB Low	25 Pos 0	18.00	1	16.23	18.00	2	15.28	
			50% RB Mid	25 Pos 12	18.00	1	16.19	18.00	2	15.25	
			50% RB High	25 Pos 24	18.00	1	16.17	18.00	2	15.21	
100% RB		50 Pos 0	18.00	1	16.25	18.00	2	15.26			
132622		1775	1RB Low	1 Pos 0	18.00	0	17.24	18.00	1	16.40	
			1RB Mid	1 Pos 24	18.00	0	17.24	18.00	1	16.37	
			1RB High	1 Pos 49	18.00	0	17.28	18.00	1	16.39	
			50% RB Low	25 Pos 0	18.00	1	16.21	18.00	2	15.30	
	50% RB Mid		25 Pos 12	18.00	1	16.20	18.00	2	15.31		
	50% RB High		25 Pos 24	18.00	1	16.20	18.00	2	15.25		
100% RB	50 Pos 0	18.00	1	16.23	18.00	2	15.24				

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE66	5.0 MHz	131997	1712.5	1RB Low	1 Pos 0	18.00	0	17.25	18.00	1	16.49
				1RB Mid	1 Pos 12	18.00	0	17.25	18.00	1	16.53
				1RB High	1 Pos 24	18.00	0	17.32	18.00	1	16.53
				50% RB Low	12 Pos 0	18.00	1	16.17	18.00	2	15.19
				50% RB Mid	12 Pos 6	18.00	1	16.17	18.00	2	15.19
				50% RB High	12 Pos 11	18.00	1	16.17	18.00	2	15.20
		100% RB	25 Pos 0	18.00	1	16.20	18.00	2	15.27		
		132422	1755	1RB Low	1 Pos 0	18.00	0	17.16	18.00	1	16.43
				1RB Mid	1 Pos 12	18.00	0	17.23	18.00	1	16.44
				1RB High	1 Pos 24	18.00	0	17.19	18.00	1	16.46
				50% RB Low	12 Pos 0	18.00	1	16.18	18.00	2	15.27
				50% RB Mid	12 Pos 6	18.00	1	16.16	18.00	2	15.24
				50% RB High	12 Pos 11	18.00	1	16.14	18.00	2	15.22
		100% RB	25 Pos 0	18.00	1	16.23	18.00	2	15.28		
		132647	1777.5	1RB Low	1 Pos 0	18.00	0	17.23	18.00	1	16.44
				1RB Mid	1 Pos 12	18.00	0	17.24	18.00	1	16.47
				1RB High	1 Pos 24	18.00	0	17.28	18.00	1	16.48
				50% RB Low	12 Pos 0	18.00	1	16.29	18.00	2	15.24
	50% RB Mid			12 Pos 6	18.00	1	16.25	18.00	2	15.23	
	50% RB High			12 Pos 11	18.00	1	16.23	18.00	2	15.16	
	100% RB	25 Pos 0	18.00	1	16.26	18.00	2	15.25			
	3.0 MHz	131987	1711.5	1RB Low	1 Pos 0	18.00	0	17.13	18.00	1	16.44
				1RB Mid	1 Pos 7	18.00	0	17.15	18.00	1	16.46
				1RB High	1 Pos 14	18.00	0	17.14	18.00	1	16.49
				50% RB Low	8 Pos 0	18.00	1	16.14	18.00	2	15.21
				50% RB Mid	8 Pos 4	18.00	1	16.16	18.00	2	15.22
				50% RB High	8 Pos 7	18.00	1	16.16	18.00	2	15.19
		100% RB	15 Pos 0	18.00	1	16.17	18.00	2	15.17		
		132422	1755	1RB Low	1 Pos 0	18.00	0	17.16	18.00	1	16.42
				1RB Mid	1 Pos 7	18.00	0	17.17	18.00	1	16.51
				1RB High	1 Pos 14	18.00	0	17.10	18.00	1	16.42
				50% RB Low	8 Pos 0	18.00	1	16.15	18.00	2	15.24
				50% RB Mid	8 Pos 4	18.00	1	16.19	18.00	2	15.22
				50% RB High	8 Pos 7	18.00	1	16.14	18.00	2	15.18
		100% RB	15 Pos 0	18.00	1	16.16	18.00	2	15.19		
		132657	1778.5	1RB Low	1 Pos 0	18.00	0	17.19	18.00	1	16.51
				1RB Mid	1 Pos 7	18.00	0	17.23	18.00	1	16.57
				1RB High	1 Pos 14	18.00	0	17.18	18.00	1	16.50
				50% RB Low	8 Pos 0	18.00	1	16.24	18.00	2	15.29
	50% RB Mid			8 Pos 4	18.00	1	16.23	18.00	2	15.32	
	50% RB High			8 Pos 7	18.00	1	16.21	18.00	2	15.29	
	100% RB	15 Pos 0	18.00	1	16.22	18.00	2	15.21			
	1.4 MHz	131979	1710	1RB Low	1 Pos 0	18.00	0	17.26	18.00	1	16.19
				1RB Mid	1 Pos 2	18.00	0	17.30	18.00	1	16.28
				1RB High	1 Pos 5	18.00	0	17.27	18.00	1	16.19
				50% RB Low	3 Pos 0	18.00	0	17.18	18.00	1	16.33
				50% RB Mid	3 Pos 1	18.00	0	17.20	18.00	1	16.33
				50% RB High	3 Pos 2	18.00	0	17.16	18.00	1	16.36
		100% RB	6 Pos 0	18.00	1	16.16	18.00	2	15.23		
		132422	1755	1RB Low	1 Pos 0	18.00	0	17.24	18.00	1	16.21
				1RB Mid	1 Pos 2	18.00	0	17.31	18.00	1	16.31
				1RB High	1 Pos 5	18.00	0	17.30	18.00	1	16.23
				50% RB Low	3 Pos 0	18.00	0	17.19	18.00	1	16.34
				50% RB Mid	3 Pos 1	18.00	0	17.20	18.00	1	16.31
				50% RB High	3 Pos 2	18.00	0	17.20	18.00	1	16.35
		100% RB	6 Pos 0	18.00	1	16.17	18.00	2	15.22		
		132665	1779.3	1RB Low	1 Pos 0	18.00	0	17.34	18.00	1	16.27
				1RB Mid	1 Pos 2	18.00	0	17.38	18.00	1	16.36
				1RB High	1 Pos 5	18.00	0	17.34	18.00	1	16.28
				50% RB Low	3 Pos 0	18.00	0	17.25	18.00	1	16.49
50% RB Mid	3 Pos 1			18.00	0	17.25	18.00	1	16.53		
50% RB High	3 Pos 2			18.00	0	17.32	18.00	1	16.53		
100% RB	6 Pos 0	18.00	1	16.17	18.00	2	15.19				

B.2.2.36 LTE Band 66 FDD – Laptop Mode – Antenna 8

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE66	20 MHz	132072	1720	1RB Low	1 Pos 0	17.50	0	16.69	17.50	1	15.89
				1RB Mid	1 Pos 50	17.50	0	16.82	17.50	1	16.08
				1RB High	1 Pos 99	17.50	0	16.82	17.50	1	16.02
				50% RB Low	50 Pos 0	17.50	1	15.81	17.50	2	14.86
				50% RB Mid	50 Pos 24	17.50	1	15.86	17.50	2	14.88
				50% RB High	50 Pos 50	17.50	1	15.95	17.50	2	15.00
		100% RB	100 Pos 0	17.50	1	15.85	17.50	2	14.88		
		132322	1745	1RB Low	1 Pos 0	17.50	0	16.74	17.50	1	15.96
				1RB Mid	1 Pos 50	17.50	0	16.88	17.50	1	16.14
				1RB High	1 Pos 99	17.50	0	16.84	17.50	1	16.04
				50% RB Low	50 Pos 0	17.50	1	16.04	17.50	2	15.07
				50% RB Mid	50 Pos 24	17.50	1	15.95	17.50	2	15.00
				50% RB High	50 Pos 50	17.50	1	15.96	17.50	2	15.01
		100% RB	100 Pos 0	17.50	1	15.99	17.50	2	15.02		
		132572	1770	1RB Low	1 Pos 0	17.50	0	16.76	17.50	1	15.98
				1RB Mid	1 Pos 50	17.50	0	16.94	17.50	1	16.13
				1RB High	1 Pos 99	17.50	0	16.83	17.50	1	16.04
				50% RB Low	50 Pos 0	17.50	1	15.80	17.50	2	14.83
	50% RB Mid			50 Pos 24	17.50	1	15.94	17.50	2	14.96	
	50% RB High			50 Pos 50	17.50	1	15.81	17.50	2	14.84	
	100% RB	100 Pos 0	17.50	1	15.79	17.50	2	14.78			
	15 MHz	132047	1717.5	1RB Low	1 Pos 0	17.50	0	16.67	17.50	1	15.98
				1RB Mid	1 Pos 38	17.50	0	16.84	17.50	1	16.13
				1RB High	1 Pos 74	17.50	0	16.77	17.50	1	16.09
				50% RB Low	38 Pos 0	17.50	1	15.73	17.50	2	14.80
				50% RB Mid	38 Pos 19	17.50	1	15.78	17.50	2	14.85
				50% RB High	38 Pos 39	17.50	1	15.78	17.50	2	14.83
		100% RB	75 Pos 0	17.50	1	15.83	17.50	2	14.84		
		132422	1755	1RB Low	1 Pos 0	17.50	0	16.78	17.50	1	16.06
				1RB Mid	1 Pos 38	17.50	0	16.87	17.50	1	16.17
				1RB High	1 Pos 74	17.50	0	16.79	17.50	1	16.10
				50% RB Low	38 Pos 0	17.50	1	15.95	17.50	2	14.95
				50% RB Mid	38 Pos 19	17.50	1	15.92	17.50	2	14.94
				50% RB High	38 Pos 39	17.50	1	15.89	17.50	2	14.90
		100% RB	75 Pos 0	17.50	1	15.94	17.50	2	14.99		
		132597	1772.5	1RB Low	1 Pos 0	17.50	0	16.80	17.50	1	16.08
				1RB Mid	1 Pos 38	17.50	0	16.87	17.50	1	16.17
				1RB High	1 Pos 74	17.50	0	16.82	17.50	1	16.12
				50% RB Low	38 Pos 0	17.50	1	15.85	17.50	2	14.93
	50% RB Mid			38 Pos 19	17.50	1	15.91	17.50	2	14.96	
	50% RB High			38 Pos 39	17.50	1	15.83	17.50	2	14.83	
	100% RB	75 Pos 0	17.50	1	15.86	17.50	2	14.88			
	10 MHz	132022	1715	1RB Low	1 Pos 0	17.50	0	16.76	17.50	1	16.03
				1RB Mid	1 Pos 24	17.50	0	16.86	17.50	1	16.19
				1RB High	1 Pos 49	17.50	0	16.84	17.50	1	16.14
				50% RB Low	25 Pos 0	17.50	1	15.80	17.50	2	14.93
				50% RB Mid	25 Pos 12	17.50	1	15.80	17.50	2	14.93
				50% RB High	25 Pos 24	17.50	1	15.82	17.50	2	14.92
100% RB		50 Pos 0	17.50	1	15.84	17.50	2	14.83			
132422		1755	1RB Low	1 Pos 0	17.50	0	16.83	17.50	1	16.12	
			1RB Mid	1 Pos 24	17.50	0	16.89	17.50	1	16.18	
			1RB High	1 Pos 49	17.50	0	16.88	17.50	1	16.18	
			50% RB Low	25 Pos 0	17.50	1	15.95	17.50	2	15.08	
			50% RB Mid	25 Pos 12	17.50	1	15.92	17.50	2	15.01	
			50% RB High	25 Pos 24	17.50	1	15.94	17.50	2	15.01	
100% RB		50 Pos 0	17.50	1	16.00	17.50	2	15.02			
132622		1775	1RB Low	1 Pos 0	17.50	0	16.90	17.50	1	16.18	
			1RB Mid	1 Pos 24	17.50	0	16.87	17.50	1	16.19	
			1RB High	1 Pos 49	17.50	0	16.86	17.50	1	16.15	
			50% RB Low	25 Pos 0	17.50	1	15.94	17.50	2	15.09	
	50% RB Mid		25 Pos 12	17.50	1	15.90	17.50	2	14.99		
	50% RB High		25 Pos 24	17.50	1	15.80	17.50	2	14.89		
100% RB	50 Pos 0	17.50	1	15.91	17.50	2	14.96				

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE66	5.0 MHz	131997	1712.5	1RB Low	1 Pos 0	17.50	0	16.84	17.50	1	16.07
				1RB Mid	1 Pos 12	17.50	0	16.84	17.50	1	16.11
				1RB High	1 Pos 24	17.50	0	16.93	17.50	1	16.18
				50% RB Low	12 Pos 0	17.50	1	15.77	17.50	2	14.83
				50% RB Mid	12 Pos 6	17.50	1	15.77	17.50	2	14.82
				50% RB High	12 Pos 11	17.50	1	15.78	17.50	2	14.79
		100% RB	25 Pos 0	17.50	1	15.80	17.50	2	14.89		
		132422	1755	1RB Low	1 Pos 0	17.50	0	16.95	17.50	1	16.21
				1RB Mid	1 Pos 12	17.50	0	16.93	17.50	1	16.21
				1RB High	1 Pos 24	17.50	0	16.98	17.50	1	16.25
				50% RB Low	12 Pos 0	17.50	1	15.91	17.50	2	14.95
				50% RB Mid	12 Pos 6	17.50	1	15.89	17.50	2	14.90
				50% RB High	12 Pos 11	17.50	1	15.88	17.50	2	14.86
		100% RB	25 Pos 0	17.50	1	15.93	17.50	2	15.00		
		132647	1777.5	1RB Low	1 Pos 0	17.50	0	16.93	17.50	1	16.17
				1RB Mid	1 Pos 12	17.50	0	16.99	17.50	1	16.19
				1RB High	1 Pos 24	17.50	0	16.97	17.50	1	16.20
				50% RB Low	12 Pos 0	17.50	1	15.96	17.50	2	14.94
	50% RB Mid			12 Pos 6	17.50	1	15.92	17.50	2	14.91	
	50% RB High			12 Pos 11	17.50	1	15.87	17.50	2	14.84	
	100% RB	25 Pos 0	17.50	1	15.93	17.50	2	15.01			
	3.0 MHz	131987	1711.5	1RB Low	1 Pos 0	17.50	0	16.70	17.50	1	16.02
				1RB Mid	1 Pos 7	17.50	0	16.76	17.50	1	16.07
				1RB High	1 Pos 14	17.50	0	16.74	17.50	1	16.09
				50% RB Low	8 Pos 0	17.50	1	15.73	17.50	2	14.80
				50% RB Mid	8 Pos 4	17.50	1	15.73	17.50	2	14.81
				50% RB High	8 Pos 7	17.50	1	15.74	17.50	2	14.81
		100% RB	15 Pos 0	17.50	1	15.76	17.50	2	14.77		
		132422	1755	1RB Low	1 Pos 0	17.50	0	16.86	17.50	1	16.14
				1RB Mid	1 Pos 7	17.50	0	16.88	17.50	1	16.15
				1RB High	1 Pos 14	17.50	0	16.82	17.50	1	16.15
				50% RB Low	8 Pos 0	17.50	1	15.88	17.50	2	14.94
				50% RB Mid	8 Pos 4	17.50	1	15.88	17.50	2	14.97
				50% RB High	8 Pos 7	17.50	1	15.88	17.50	2	14.92
		100% RB	15 Pos 0	17.50	1	15.88	17.50	2	14.88		
		132657	1778.5	1RB Low	1 Pos 0	17.50	0	16.85	17.50	1	16.15
				1RB Mid	1 Pos 7	17.50	0	16.91	17.50	1	16.20
				1RB High	1 Pos 14	17.50	0	16.83	17.50	1	16.16
				50% RB Low	8 Pos 0	17.50	1	15.88	17.50	2	14.97
	50% RB Mid			8 Pos 4	17.50	1	15.89	17.50	2	14.98	
	50% RB High			8 Pos 7	17.50	1	15.87	17.50	2	14.94	
	100% RB	15 Pos 0	17.50	1	15.91	17.50	2	14.90			
	1.4 MHz	131979	1710	1RB Low	1 Pos 0	17.50	0	16.84	17.50	1	15.80
				1RB Mid	1 Pos 2	17.50	0	16.87	17.50	1	15.88
				1RB High	1 Pos 5	17.50	0	16.84	17.50	1	15.80
				50% RB Low	3 Pos 0	17.50	0	16.77	17.50	1	15.91
				50% RB Mid	3 Pos 1	17.50	0	16.77	17.50	1	15.92
				50% RB High	3 Pos 2	17.50	0	16.77	17.50	1	15.92
		100% RB	6 Pos 0	17.50	1	15.75	17.50	2	14.83		
		132422	1755	1RB Low	1 Pos 0	17.50	0	16.98	17.50	1	15.97
				1RB Mid	1 Pos 2	17.50	0	17.04	17.50	1	16.04
				1RB High	1 Pos 5	17.50	0	16.99	17.50	1	15.92
				50% RB Low	3 Pos 0	17.50	0	16.94	17.50	1	16.03
				50% RB Mid	3 Pos 1	17.50	0	16.93	17.50	1	16.02
				50% RB High	3 Pos 2	17.50	0	16.90	17.50	1	16.06
		100% RB	6 Pos 0	17.50	1	15.88	17.50	2	14.94		
		132665	1779.3	1RB Low	1 Pos 0	17.50	0	17.00	17.50	1	15.96
				1RB Mid	1 Pos 2	17.50	0	17.05	17.50	1	16.04
				1RB High	1 Pos 5	17.50	0	17.00	17.50	1	15.98
				50% RB Low	3 Pos 0	17.50	0	16.93	17.50	1	16.06
50% RB Mid	3 Pos 1			17.50	0	16.93	17.50	1	16.05		
50% RB High	3 Pos 2			17.50	0	16.96	17.50	1	16.07		
100% RB	6 Pos 0	17.50	1	15.91	17.50	2	14.96				

B.2.2.37 LTE Band 66 FDD – Tablet Mode – Antenna 8

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE66	20 MHz	132072	1720	1RB Low	1 Pos 0	16.00	0	14.77	16.00	1	14.05
				1RB Mid	1 Pos 50	16.00	0	14.91	16.00	1	14.22
				1RB High	1 Pos 99	16.00	0	14.87	16.00	1	14.17
				50% RB Low	50 Pos 0	16.00	1	13.86	16.00	2	12.79
				50% RB Mid	50 Pos 24	16.00	1	13.91	16.00	2	12.84
				50% RB High	50 Pos 50	16.00	1	13.92	16.00	2	12.88
		100% RB	100 Pos 0	16.00	1	13.90	16.00	2	12.88		
		132322	1745	1RB Low	1 Pos 0	16.00	0	14.82	16.00	1	14.09
				1RB Mid	1 Pos 50	16.00	0	14.98	16.00	1	14.26
				1RB High	1 Pos 99	16.00	0	14.90	16.00	1	14.22
				50% RB Low	50 Pos 0	16.00	1	14.04	16.00	2	13.02
				50% RB Mid	50 Pos 24	16.00	1	13.94	16.00	2	12.94
				50% RB High	50 Pos 50	16.00	1	13.95	16.00	2	12.95
		100% RB	100 Pos 0	16.00	1	14.00	16.00	2	12.99		
		132572	1770	1RB Low	1 Pos 0	16.00	0	14.80	16.00	1	14.11
				1RB Mid	1 Pos 50	16.00	0	14.99	16.00	1	14.27
				1RB High	1 Pos 99	16.00	0	14.90	16.00	1	14.18
				50% RB Low	50 Pos 0	16.00	1	13.82	16.00	2	12.79
	50% RB Mid			50 Pos 24	16.00	1	13.97	16.00	2	12.94	
	50% RB High			50 Pos 50	16.00	1	13.79	16.00	2	12.79	
	100% RB	100 Pos 0	16.00	1	13.83	16.00	2	12.80			
	15 MHz	132047	1717.5	1RB Low	1 Pos 0	16.00	0	14.69	16.00	1	14.31
				1RB Mid	1 Pos 38	16.00	0	14.84	16.00	1	14.50
				1RB High	1 Pos 74	16.00	0	14.81	16.00	1	14.44
				50% RB Low	38 Pos 0	16.00	1	13.78	16.00	2	12.83
				50% RB Mid	38 Pos 19	16.00	1	13.83	16.00	2	12.86
				50% RB High	38 Pos 39	16.00	1	13.83	16.00	2	12.87
		100% RB	75 Pos 0	16.00	1	13.88	16.00	2	12.85		
		132422	1755	1RB Low	1 Pos 0	16.00	0	14.77	16.00	1	14.38
				1RB Mid	1 Pos 38	16.00	0	14.88	16.00	1	14.52
				1RB High	1 Pos 74	16.00	0	14.80	16.00	1	14.45
				50% RB Low	38 Pos 0	16.00	1	13.92	16.00	2	12.96
				50% RB Mid	38 Pos 19	16.00	1	13.93	16.00	2	12.93
				50% RB High	38 Pos 39	16.00	1	13.88	16.00	2	12.95
		100% RB	75 Pos 0	16.00	1	13.95	16.00	2	12.92		
		132597	1772.5	1RB Low	1 Pos 0	16.00	0	14.78	16.00	1	14.45
				1RB Mid	1 Pos 38	16.00	0	14.86	16.00	1	14.52
				1RB High	1 Pos 74	16.00	0	14.85	16.00	1	14.48
				50% RB Low	38 Pos 0	16.00	1	13.86	16.00	2	12.87
	50% RB Mid			38 Pos 19	16.00	1	13.97	16.00	2	12.97	
	50% RB High			38 Pos 39	16.00	1	13.88	16.00	2	12.82	
	100% RB	75 Pos 0	16.00	1	13.89	16.00	2	12.87			
	10 MHz	132022	1715	1RB Low	1 Pos 0	16.00	0	14.79	16.00	1	14.39
				1RB Mid	1 Pos 24	16.00	0	14.89	16.00	1	14.50
				1RB High	1 Pos 49	16.00	0	14.89	16.00	1	14.48
				50% RB Low	25 Pos 0	16.00	1	13.82	16.00	2	12.90
				50% RB Mid	25 Pos 12	16.00	1	13.86	16.00	2	12.92
				50% RB High	25 Pos 24	16.00	1	13.85	16.00	2	12.89
100% RB		50 Pos 0	16.00	1	13.87	16.00	2	12.84			
132422		1755	1RB Low	1 Pos 0	16.00	0	14.85	16.00	1	14.44	
			1RB Mid	1 Pos 24	16.00	0	14.88	16.00	1	14.51	
			1RB High	1 Pos 49	16.00	0	14.89	16.00	1	14.54	
			50% RB Low	25 Pos 0	16.00	1	13.99	16.00	2	13.02	
			50% RB Mid	25 Pos 12	16.00	1	13.97	16.00	2	12.99	
			50% RB High	25 Pos 24	16.00	1	13.94	16.00	2	12.99	
100% RB		50 Pos 0	16.00	1	13.98	16.00	2	12.99			
132622		1775	1RB Low	1 Pos 0	16.00	0	14.92	16.00	1	14.52	
			1RB Mid	1 Pos 24	16.00	0	14.88	16.00	1	14.47	
			1RB High	1 Pos 49	16.00	0	14.90	16.00	1	14.52	
			50% RB Low	25 Pos 0	16.00	1	13.98	16.00	2	13.04	
	50% RB Mid		25 Pos 12	16.00	1	13.95	16.00	2	13.00		
	50% RB High		25 Pos 24	16.00	1	13.81	16.00	2	12.88		
100% RB	50 Pos 0	16.00	1	13.93	16.00	2	12.92				

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE66	5.0 MHz	131997	1712.5	1RB Low	1 Pos 0	16.00	0	14.90	16.00	1	13.74
				1RB Mid	1 Pos 12	16.00	0	14.92	16.00	1	13.75
				1RB High	1 Pos 24	16.00	0	14.97	16.00	1	13.83
				50% RB Low	12 Pos 0	16.00	1	13.82	16.00	2	12.81
				50% RB Mid	12 Pos 6	16.00	1	13.84	16.00	2	12.81
				50% RB High	12 Pos 11	16.00	1	13.81	16.00	2	12.78
		100% RB	25 Pos 0	16.00	1	13.81	16.00	2	12.89		
		132422	1755	1RB Low	1 Pos 0	16.00	0	14.96	16.00	1	13.84
				1RB Mid	1 Pos 12	16.00	0	14.99	16.00	1	13.83
				1RB High	1 Pos 24	16.00	0	15.00	16.00	1	13.88
				50% RB Low	12 Pos 0	16.00	1	13.94	16.00	2	12.95
				50% RB Mid	12 Pos 6	16.00	1	13.95	16.00	2	12.90
				50% RB High	12 Pos 11	16.00	1	13.89	16.00	2	12.87
		100% RB	25 Pos 0	16.00	1	13.93	16.00	2	13.02		
		132647	1777.5	1RB Low	1 Pos 0	16.00	0	14.96	16.00	1	13.81
				1RB Mid	1 Pos 12	16.00	0	15.03	16.00	1	13.85
				1RB High	1 Pos 24	16.00	0	15.01	16.00	1	13.87
				50% RB Low	12 Pos 0	16.00	1	14.00	16.00	2	12.97
	50% RB Mid			12 Pos 6	16.00	1	13.95	16.00	2	12.91	
	50% RB High			12 Pos 11	16.00	1	13.88	16.00	2	12.86	
	100% RB	25 Pos 0	16.00	1	13.94	16.00	2	12.98			
	3.0 MHz	131987	1711.5	1RB Low	1 Pos 0	16.00	0	14.75	16.00	1	14.35
				1RB Mid	1 Pos 7	16.00	0	14.75	16.00	1	14.36
				1RB High	1 Pos 14	16.00	0	14.80	16.00	1	14.40
				50% RB Low	8 Pos 0	16.00	1	13.76	16.00	2	12.93
				50% RB Mid	8 Pos 4	16.00	1	13.77	16.00	2	12.97
				50% RB High	8 Pos 7	16.00	1	13.75	16.00	2	12.93
		100% RB	15 Pos 0	16.00	1	13.77	16.00	2	12.84		
		132422	1755	1RB Low	1 Pos 0	16.00	0	14.85	16.00	1	14.48
				1RB Mid	1 Pos 7	16.00	0	14.84	16.00	1	14.53
				1RB High	1 Pos 14	16.00	0	14.82	16.00	1	14.47
				50% RB Low	8 Pos 0	16.00	1	13.89	16.00	2	13.08
				50% RB Mid	8 Pos 4	16.00	1	13.91	16.00	2	13.07
				50% RB High	8 Pos 7	16.00	1	13.90	16.00	2	13.05
		100% RB	15 Pos 0	16.00	1	13.89	16.00	2	12.97		
		132657	1778.5	1RB Low	1 Pos 0	16.00	0	14.92	16.00	1	14.50
				1RB Mid	1 Pos 7	16.00	0	14.88	16.00	1	14.51
				1RB High	1 Pos 14	16.00	0	14.88	16.00	1	14.48
				50% RB Low	8 Pos 0	16.00	1	13.91	16.00	2	13.10
	50% RB Mid			8 Pos 4	16.00	1	13.91	16.00	2	13.12	
	50% RB High			8 Pos 7	16.00	1	13.90	16.00	2	13.06	
	100% RB	15 Pos 0	16.00	1	13.92	16.00	2	13.00			
	1.4 MHz	131979	1710	1RB Low	1 Pos 0	16.00	0	14.72	16.00	1	13.80
				1RB Mid	1 Pos 2	16.00	0	14.75	16.00	1	13.78
				1RB High	1 Pos 5	16.00	0	14.75	16.00	1	13.81
				50% RB Low	3 Pos 0	16.00	0	14.81	16.00	1	13.96
				50% RB Mid	3 Pos 1	16.00	0	14.80	16.00	1	13.97
				50% RB High	3 Pos 2	16.00	0	14.80	16.00	1	13.99
100% RB		6 Pos 0	16.00	1	13.80	16.00	2	12.79			
132422		1755	1RB Low	1 Pos 0	16.00	0	14.93	16.00	1	13.90	
			1RB Mid	1 Pos 2	16.00	0	14.94	16.00	1	13.86	
			1RB High	1 Pos 5	16.00	0	14.90	16.00	1	13.89	
			50% RB Low	3 Pos 0	16.00	0	14.93	16.00	1	14.08	
			50% RB Mid	3 Pos 1	16.00	0	14.95	16.00	1	14.11	
			50% RB High	3 Pos 2	16.00	0	14.93	16.00	1	14.12	
100% RB		6 Pos 0	16.00	1	13.94	16.00	2	12.91			
132665		1779.3	1RB Low	1 Pos 0	16.00	0	14.89	16.00	1	13.88	
			1RB Mid	1 Pos 2	16.00	0	14.95	16.00	1	13.90	
			1RB High	1 Pos 5	16.00	0	14.92	16.00	1	13.92	
			50% RB Low	3 Pos 0	16.00	0	14.90	16.00	1	13.74	
	50% RB Mid		3 Pos 1	16.00	0	14.92	16.00	1	13.75		
	50% RB High		3 Pos 2	16.00	0	14.97	16.00	1	13.83		
100% RB	6 Pos 0	16.00	1	13.82	16.00	2	12.81				

B.2.2.38 LTE Band 71 FDD – Laptop & Tablet Modes – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE71	20 MHz	133297	680.5	1RB Low	1 Pos 0	23.00	0	22.83	23.00	1	22.03
				1RB Mid	1 Pos 50	23.00	0	22.83	23.00	1	22.18
				1RB High	1 Pos 99	23.00	0	22.88	23.00	1	22.14
				50% RB Low	50 Pos 0	23.00	1	22.34	23.00	2	21.39
				50% RB Mid	50 Pos 24	23.00	1	22.39	23.00	2	21.41
				50% RB High	50 Pos 50	23.00	1	22.34	23.00	2	21.48
	15 MHz	133297	680.5	100% RB	100 Pos 0	23.00	1	22.38	23.00	2	21.41
				1RB Low	1 Pos 0	23.00	0	22.43	23.00	1	22.09
				1RB Mid	1 Pos 50	23.00	0	22.45	23.00	1	22.24
				1RB High	1 Pos 99	23.00	0	22.48	23.00	1	22.19
				50% RB Low	50 Pos 0	23.00	1	21.42	23.00	2	21.38
				50% RB Mid	50 Pos 24	23.00	1	21.42	23.00	2	21.37
	10 MHz	133172	668	50% RB High	50 Pos 50	23.00	1	21.41	23.00	2	21.45
				100% RB	100 Pos 0	23.00	1	21.48	23.00	2	21.36
				1RB Low	1 Pos 0	23.00	0	22.74	23.00	1	22.09
				1RB Mid	1 Pos 50	23.00	0	22.82	23.00	1	21.74
				1RB High	1 Pos 99	23.00	0	22.8	23.00	1	21.84
				50% RB Low	50 Pos 0	23.00	1	22.39	23.00	2	21.81
		133297	680.5	50% RB Mid	50 Pos 24	23.00	1	22.36	23.00	2	21.5
				50% RB High	50 Pos 50	23.00	1	22.42	23.00	2	21.45
				100% RB	100 Pos 0	23.00	1	22.38	23.00	2	21.51
				1RB Low	1 Pos 0	23.00	0	21.74	23.00	1	21.38
				1RB Mid	1 Pos 38	23.00	0	21.84	23.00	1	22.14
				1RB High	1 Pos 74	23.00	0	21.81	23.00	1	22.23
		133422	693	50% RB Low	38 Pos 0	23.00	1	21.5	23.00	2	22.21
				50% RB Mid	38 Pos 19	23.00	1	21.45	23.00	2	21.46
				50% RB High	38 Pos 39	23.00	1	21.51	23.00	2	21.41
				100% RB	75 Pos 0	23.00	1	21.38	23.00	2	21.39
				1RB Low	1 Pos 0	23.00	0	22.62	23.00	1	21.38
				1RB Mid	1 Pos 38	23.00	0	22.77	23.00	1	21.61
	5 MHz	133147	665.5	1RB High	1 Pos 74	23.00	0	22.70	23.00	1	21.63
				50% RB Low	38 Pos 0	23.00	1	22.33	23.00	2	21.59
				50% RB Mid	38 Pos 19	23.00	1	22.31	23.00	2	21.39
				50% RB High	38 Pos 39	23.00	1	22.32	23.00	2	21.41
				100% RB	75 Pos 0	23.00	1	22.34	23.00	2	21.41
				1RB Low	1 Pos 0	23.00	0	21.75	23.00	1	22.43
		133297	680.5	1RB Mid	1 Pos 24	23.00	0	21.80	23.00	1	22.45
				1RB High	1 Pos 49	23.00	0	21.76	23.00	1	22.48
				50% RB Low	25 Pos 0	23.00	1	21.38	23.00	2	21.42
				50% RB Mid	25 Pos 12	23.00	1	21.39	23.00	2	21.42
				50% RB High	25 Pos 24	23.00	1	21.36	23.00	2	21.41
				100% RB	50 Pos 0	23.00	1	21.31	23.00	2	21.48
	133447	695.5	1RB Low	1 Pos 0	23.00	0	22.66	23.00	1	21.88	
			1RB Mid	1 Pos 24	23.00	0	22.85	23.00	1	21.89	
			1RB High	1 Pos 49	23.00	0	22.77	23.00	1	21.90	
			50% RB Low	25 Pos 0	23.00	1	22.25	23.00	2	21.39	
			50% RB Mid	25 Pos 12	23.00	1	22.29	23.00	2	21.36	
			50% RB High	25 Pos 24	23.00	1	22.23	23.00	2	21.39	
133447	695.5	100% RB	50 Pos 0	23.00	1	22.22	23.00	2	21.38		
		1RB Low	1 Pos 0	23.00	0	22.28	23.00	1	21.83		
		1RB Mid	1 Pos 24	23.00	0	22.45	23.00	1	21.81		
		1RB High	1 Pos 49	23.00	0	22.30	23.00	1	21.83		
		50% RB Low	25 Pos 0	23.00	1	21.30	23.00	2	21.40		
		50% RB Mid	25 Pos 12	23.00	1	21.33	23.00	2	21.38		
133447	695.5	50% RB High	25 Pos 24	23.00	1	21.28	23.00	2	21.36		
		100% RB	50 Pos 0	23.00	1	21.21	23.00	2	22.34		

B.2.3 Intra-Band Contiguous

UL CA shall be tested based on the worst-case SAR configuration determined from non-CA SAR testing result. The UL CA mode power measurements represent the total power across both carriers.

According to November 2017 TCB workshop, the following needs to be performed: The maximum measured output power, RB allocation, CC offsets, CC channel BWs, MPR, modulation and other relevant information for all UL CA SAR configurations are required in SAR reports to support the test setup and results, including explanations, call box configurations and certain testing restriction

1) When the maximum output for UL CA is \leq standalone LTE mode

- The primary carrier is configured according to the highest standalone SAR configuration tested
- The secondary carrier and subsequent CCs are configured according to procedures used for power measurement and parameters similar to that used for the PCC

2) When the Reported SAR for UL CA configuration, is > 1.2 W/kg, UL CA SAR is also required for all the other test channels.

B.2.3.1 LTE CA 5B Antenna 5 – Laptop mode:

Band	Modulation / BW	PCC			SCC			Pwr Avg (dBm)	Factory Upper Tolerance (dBm)
		Ch	Freq (MHz)	RB Allocation	Ch	Freq (MHz)	RB Allocation		
LTE 5B	QPSK / 10MHz	26775	822.5	1RB High	20476	831.6	1RB Low	24.23	25.00

B.2.3.1 LTE CA 7C Antenna 5 – Tablet mode:

Band	Modulation / BW	PCC			SCC			Pwr Avg (dBm)	Factory Upper Tolerance (dBm)
		Ch	Freq (MHz)	RB Allocation	Ch	Freq (MHz)	RB Allocation		
LTE 41C	QPSK / 20MHz	20850	2510	1RB High	21100	2535	1RB Low	15.81	16.00

B.2.3.2 LTE CA 38C Antenna 5 – Laptop mode:

Band	Modulation / BW	PCC			SCC			Pwr Avg (dBm)	Factory Upper Tolerance (dBm)
		Ch	Freq (MHz)	RB Allocation	Ch	Freq (MHz)	RB Allocation		
LTE 38C	QPSK / 20MHz	37901	2585.1	1RB High	38099	2604.9	1RB Low	22.11	23.50

B.2.3.3 LTE CA 41C Antenna 5 – Tablet mode:

Band	Modulation / BW	PCC			SCC			Pwr Avg (dBm)	Factory Upper Tolerance (dBm)
		Ch	Freq (MHz)	RB Allocation	Ch	Freq (MHz)	RB Allocation		
LTE 41C	QPSK / 20MHz	40521	2583.1	1RB High	40719	2602.9	1RB Low	15.72	16.00

B.2.3.4 LTE CA 48C Antenna 8 – Tablet mode:

Band	Modulation / BW	PCC			SCC			Pwr Avg (dBm)	Factory Upper Tolerance (dBm)
		Ch	Freq (MHz)	RB Allocation	Ch	Freq (MHz)	RB Allocation		
LTE 41C	QPSK / 20MHz	55891	3615.1	1RB High	56089	3634.9	1RB Low	13.13	14.00

B.2.3.5 LTE CA 66B, 66C Antenna 5 – Laptop mode:

Band	Modulation / BW	PCC			SCC			Pwr Avg (dBm)	Factory Upper Tolerance (dBm)
		Ch	Freq (MHz)	RB Allocation	Ch	Freq (MHz)	RB Allocation		
LTE 66B	QPSK / 10MHz	132373	1750.1	1RB High	132472	1760	1RB Low	20.56	18.00
LTE 66C	QPSK / 20MHz	132323	1745.1	1RB High	132521	1764.9	1RB Low	20.67	18.00

B.2.4 5G NR (FR1)

B.2.4.1 5G NR Band 2 FDD – Laptop / Tablet Modes – Antennas 5

SAR Measurement for 5G NR Band 2 FDD (Frequency range: 1850 – 1910MHz) is covered by 5G NR Band 25 FDD (Frequency range: 1850 – 1915MHz) due to overlapping frequency range, with same or higher maximum tune-up and same bandwidth.

B.2.4.2 5G NR (FR1) Band 2 FDD – Laptop Mode – Antenna 8

Band	BW	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm) Antenna 8			
							Frequency (MHz) / Channel			
							1860	1880	1900	
NR2	20	DFS-s OFDM	PI/2 BPSK	1RB Low	0	16.50	372000	376000	396000	
			QPSK	1RB Low	0	16.50		15.35		
				1RB Mid	50	16.50	15.67	15.71	15.68	
				1RB High	99	16.50		15.62		
				50% RB Low	0	16.50		15.35		
				50% RB Mid	25	16.50	15.70	15.96	15.68	
				50% RB High	49	16.50		15.77		
				100% RB	0	16.50		15.58		
			16QAM	1RB Low	0	16.50		15.62		
			64QAM	1RB Low	0	16.50		15.45		
	256QAM	1RB Low	0	16.50		15.64				
	CP-OFDM	QPSK	1RB Low	0	16.50		15.41			
								Frequency (MHz) / Channel		
								1857.5	1880	1880
								371500	376000	380500
	15	DFS-s OFDM	QPSK	1RB Low	0	16.50		15.46		
				50% RB Low	0	16.50		15.48		
								Frequency (MHz) / Channel		
								1855	1880	1905
								371000	376000	381000
10	DFS-s OFDM	QPSK	1RB Low	0	16.50		15.39			
			50% RB Low	0	16.50		15.36			
							Frequency (MHz) / Channel			
							1900	1880	1907.5	
							370500	376000	381500	
5	DFS-s OFDM	QPSK	1RB Low	0	16.50		15.64			
			50% RB Low	0	16.50		15.60			

B.2.4.3 5G NR (FR1) Band 2 FDD – Tablet Mode – Antenna 8

Band	BW	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm) Antenna 8			
							Frequency (MHz) / Channel			
							1860	1880	1900	
							372000	376000	396000	
NR2	20	DFS-s OFDM	PI/2 BPSK	1RB Low	0	14.50		13.45		
			QPSK	1RB Low	0	14.50		13.41		
				1RB Mid	50	14.50	13.48	14.01	13.94	
				1RB High	99	14.50		13.75		
				50% RB Low	0	14.50		13.78		
				50% RB Mid	25	14.50	13.48	13.96	14.02	
				50% RB High	49	14.50		13.40		
				100% RB	0	14.50		13.55		
			16QAM	1RB Low	0	14.50		13.67		
			64QAM	1RB Low	0	14.50		13.68		
	256QAM	1RB Low	0	14.50		13.46				
	CP-OFDM	QPSK	1RB Low	0	14.50		13.04			
								Frequency (MHz) / Channel		
								1857.5	1880	1880
								371500	376000	380500
	15	DFS-s OFDM	QPSK	1RB Low	0	14.50		13.43		
				50% RB Low	0	14.50		13.50		
								Frequency (MHz) / Channel		
								1855	1880	1905
								371000	376000	381000
10	DFS-s OFDM	QPSK	1RB Low	0	14.50		13.43			
			50% RB Low	0	14.50		13.36			
							Frequency (MHz) / Channel			
							1900	1880	1907.5	
							370500	376000	381500	
5	DFS-s OFDM	QPSK	1RB Low	0	14.50		13.44			
			50% RB Low	0	14.50		13.58			

B.2.4.4 5G NR (FR1) Band 5 FDD – Laptop Mode – Antenna 5

Band	BW	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm)			
							Frequency (MHz) / Channel			
							834	836.5	839	
NR5	20	DFS-s OFDM	PI/2 BPSK	1RB Low	0	25.00	166800	167300	167800	
			QPSK	1RB Low	0	25.00		24.38		
				1RB Mid	50	25.00		24.29		
				1RB High	99	25.00		24.27		
				50% RB Low	0	25.00		24.25		
				50% RB Mid	25	25.00		24.26		
				50% RB High	49	25.00		24.34		
				100% RB	0	25.00		24.25		
			16QAM	1RB Low	0	25.00		24.28		
			64QAM	1RB Low	0	25.00		24.64		
	256QAM	1RB Low	0	25.00		24.13				
	CP-OFDM	QPSK	1RB Low	0	25.00		24.09			
								Frequency (MHz) / Channel		
								831.5	836.5	841.5
								166300	167300	168300
	15	DFS-s OFDM	QPSK	1RB Low	0	25.00		24.40		
				50% RB Low	0	25.00		24.34		
								Frequency (MHz) / Channel		
								829	836.5	844
								165800	167300	168800
10	DFS-s OFDM	QPSK	1RB Low	0	25.00		24.02			
			50% RB Low	0	25.00		24.09			
							Frequency (MHz) / Channel			
							826.5	836.5	846.5	
							165300	167300	169300	
5	DFS-s OFDM	QPSK	1RB Low	0	25.00		24.36			
			50% RB Low	0	25.00		24.29			

B.2.4.5 5G NR (FR1) Band 5 FDD – Tablet Mode – Antenna 5

Band	BW	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm)			
							Frequency (MHz) / Channel			
							834	836.5	839	
							166800	167300	167800	
NR5	20	DFS-s OFDM	PI/2 BPSK	1RB Low	0	24.50		23.48		
			QPSK	1RB Low	0	24.50		23.39		
				1RB Mid	50	24.50		23.60		
				1RB High	99	24.50		23.20		
				50% RB Low	0	24.50		23.60		
				50% RB Mid	25	24.50		23.63		
				50% RB High	49	24.50		23.43		
				100% RB	0	24.50		23.55		
			16QAM	1RB Low	0	24.50		23.58		
			64QAM	1RB Low	0	24.50		23.58		
	256QAM	1RB Low	0	24.50		23.58				
	CP-OFDM	QPSK	1RB Low	0	24.50		23.84			
								Frequency (MHz) / Channel		
								831.5	836.5	841.5
								166300	167300	168300
		15	DFS-s OFDM	QPSK	1RB Low	0	24.50		23.51	
					50% RB Low	0	24.50		23.60	
								Frequency (MHz) 23.45 / Channel		
								829	836.5	844
								165800	167300	168800
	10	DFS-s OFDM	QPSK	1RB Low	0	24.50		23.45		
				50% RB Low	0	24.50		23.43		
							Frequency (MHz) / Channel			
							826.5	836.5	846.5	
							165300	167300	169300	
	5	DFS-s OFDM	QPSK	1RB Low	0	24.50		23.48		
				50% RB Low	0	24.50		23.66		

B.2.4.6 5G NR (FR1) Band 7 FDD – Laptop Mode – Antenna 5

Band	BW	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm)			
							Frequency (MHz) / Channel			
							2510	2535	2560	
							502000	507000	512000	
NR7	20	DFS-s OFDM	PI/2 BPSK	1RB Low	0	21.00		20.04		
			QPSK	1RB Low	0	21.00		19.99		
				1RB Mid	50	21.00		20.05		
				1RB High	99	21.00		20.02		
				50% RB Low	0	21.00		20.10		
				50% RB Mid	25	21.00		20.02		
				50% RB High	49	21.00		20.08		
				100% RB	0	21.00		20.06		
			16QAM	1RB Low	0	21.00		20.36		
			64QAM	1RB Low	0	21.00		20.18		
	256QAM	1RB Low	0	21.00		20.16				
	CP-OFDM	QPSK	1RB Low	0	21.00		20.04			
								Frequency (MHz) / Channel		
								2507.5	2535	2562.5
								501500	507000	512500
	15	DFS-s OFDM	QPSK	1RB Low	0	21.00		20.02		
				50% RB Low	0	21.00		20.10		
								Frequency (MHz) / Channel		
								2505	2535	2565
								501000	507000	513000
10	DFS-s OFDM	QPSK	1RB Low	0	21.00		19.85			
			50% RB Low	0	21.00		19.85			
							Frequency (MHz) / Channel			
							2502.5	2535	2567.5	
							500500	507000	513500	
5	DFS-s OFDM	QPSK	1RB Low	0	21.00		20.03			
			50% RB Low	0	21.00		20.06			

B.2.4.7 5G NR (FR1) Band 7 FDD – Tablet Mode – Antenna 5

Band	BW	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm)			
							Frequency (MHz) / Channel			
							2510	2535	2560	
							502000	507000	512000	
NR7	20	DFS-s OFDM	PI/2 BPSK	1RB Low	0	16.00		15.17		
			QPSK	1RB Low	0	16.00		15.19		
				1RB Mid	50	16.00		15.21		
				1RB High	99	16.00		15.15		
				50% RB Low	0	16.00		15.21		
				50% RB Mid	25	16.00		15.17		
				50% RB High	49	16.00		15.16		
				100% RB	0	16.00		15.23		
			16QAM	1RB Low	0	16.00		15.30		
			64QAM	1RB Low	0	16.00		15.29		
	256QAM	1RB Low	0	16.00		15.38				
	CP-OFDM	QPSK	1RB Low	0	16.00		15.22			
								Frequency (MHz) / Channel		
								2507.5	2535	2562.5
								501500	507000	512500
	15	DFS-s OFDM	QPSK	1RB Low	0	16.00		15.21		
				50% RB Low	0	16.00		15.21		
								Frequency (MHz) / Channel		
								2505	2535	2565
								501000	507000	513000
10	DFS-s OFDM	QPSK	1RB Low	0	16.00		15.06			
			50% RB Low	0	16.00		15.03			
							Frequency (MHz) / Channel			
							2502.5	2535	2567.5	
							500500	507000	513500	
5	DFS-s OFDM	QPSK	1RB Low	0	16.00		15.16			
			50% RB Low	0	16.00		15.22			

B.2.4.8 5G NR (FR1) Band 25 FDD – Laptop Mode – Antenna 5

Band	BW	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm)			
							Frequency (MHz) / Channel			
							1860	1882.5	1905	
							372000	376500	381000	
NR25	20	DFS-s OFDM	PI/2 BPSK	1RB Low	0	21.00		20.55		
			QPSK	1RB Low	0	21.00		20.45		
				1RB Mid	50	21.00		20.77		
				1RB High	99	21.00		20.76		
				50% RB Low	0	21.00		20.61		
				50% RB Mid	25	21.00		20.85		
				50% RB High	49	21.00		20.88		
				100% RB	0	21.00		20.79		
			16QAM	1RB Low	0	21.00		20.82		
			64QAM	1RB Low	0	21.00		20.81		
	256QAM	1RB Low	0	21.00		20.65				
	CP-OFDM	QPSK	1RB Low	0	21.00		20.44			
								Frequency (MHz) / Channel		
								1857.5	1882.5	1907.5
								371500	376500	381500
	15	DFS-s OFDM	QPSK	1RB Low	0	21.00		20.65		
				50% RB Low	0	21.00		20.70		
								Frequency (MHz) / Channel		
								1855	1882.5	1910
								371000	376500	382000
	10	DFS-s OFDM	QPSK	1RB Low	0	21.00		20.61		
				50% RB Low	0	21.00		20.63		
								Frequency (MHz) / Channel		
							1852.5	1882.5	1912.5	
							370500	376500	382500	
5	DFS-s OFDM	QPSK	1RB Low	0	21.00		20.76			
			50% RB Low	0	21.00		20.79			

B.2.4.9 5G NR (FR1) Band 25 FDD – Tablet Mode – Antenna 5

Band	BW	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm)			
							Frequency (MHz) / Channel			
							1860	1882.5	1905	
							372000	376500	381000	
NR25	20	DFS-s OFDM	PI/2 BPSK	1RB Low	0	18.50		17.50		
			QPSK	1RB Low	0	18.50		17.46		
				1RB Mid	50	18.50		17.75		
				1RB High	99	18.50		17.79		
				50% RB Low	0	18.50		17.62		
				50% RB Mid	25	18.50		17.88		
				50% RB High	49	18.50		17.84		
				100% RB	0	18.50		17.74		
			16QAM	1RB Low	0	18.50		17.64		
			64QAM	1RB Low	0	18.50		17.64		
	256QAM	1RB Low	0	18.50		17.70				
	CP-OFDM	QPSK	1RB Low	0	18.50		17.47			
								Frequency (MHz) / Channel		
								1857.5	1882.5	1907.5
								371500	376500	381500
	15	DFS-s OFDM	QPSK	1RB Low	0	18.50		17.56		
				50% RB Low	0	18.50		17.72		
								Frequency (MHz) / Channel		
								1855	1882.5	1910
								371000	376500	382000
10	DFS-s OFDM	QPSK	1RB Low	0	18.50		17.62			
			50% RB Low	0	18.50		17.64			
							Frequency (MHz) / Channel			
							1852.5	1882.5	1912.5	
							370500	376500	382500	
5	DFS-s OFDM	QPSK	1RB Low	0	18.50		17.69			
			50% RB Low	0	18.50		17.81			

B.2.4.10 5G NR (FR1) Band 30 FDD – Laptop Mode – Antenna 5

Band	BW	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm)				
							Frequency (MHz) / Channel				
NR30	10	DFS-s OFDM	PI/2 BPSK	1RB Low	0	22.50	2310	46200	22.39		
			QPSK	1RB Low	0	22.50				22.39	
				1RB Mid	25	22.50				22.35	
				1RB High	49	22.50				22.24	
				50% RB Low	0	22.50				22.29	
				50% RB Mid	12	22.50				22.26	
				50% RB High	25	22.50				22.09	
				100% RB	0	22.50				22.26	
			16QAM	1RB Low	0	22.50				22.50	
			64QAM	1RB Low	0	22.50				22.50	
			256QAM	1RB Low	0	22.50				22.45	
			CP-OFDM	QPSK	1RB Low	0				22.50	22.33
										Frequency (MHz) / Channel	
								2310	46200	22.50	
5	DFS-s OFDM	QPSK	1RB Low	0	22.50						
							2310	46200	22.50		
										50% RB Low	0

B.2.4.11 5G NR (FR1) Band 30 FDD – Tablet Mode – Antenna 5

Band	BW	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm)							
							Frequency (MHz) / Channel							
NR30	10	DFS-s OFDM	PI/2 BPSK	1RB Low	0	15.50		2310						
			QPSK	1RB Low	0	15.50		46200						
				1RB Mid	25	15.50		14.58						
				1RB High	49	15.50		14.63						
				50% RB Low	0	15.50		14.64						
				50% RB Mid	12	15.50		14.43						
				50% RB High	25	15.50		14.64						
				100% RB	0	15.50		14.60						
				16QAM	1RB Low	0		15.50		14.36				
			64QAM	1RB Low	0	15.50		14.54						
			256QAM	1RB Low	0	15.50		14.73						
			CP-OFDM	QPSK	1RB Low	0		15.50		14.72				
										Frequency (MHz) / Channel				
										2310				
								46200						
5	DFS-s OFDM	QPSK	1RB Low	0	15.50	14.74								
			50% RB Low	0	15.50	14.80								

B.2.4.12 5G NR (FR1) Band 38 TDD – Laptop Mode – Antenna 5

Band	BW	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm)			
							Frequency (MHz) / Channel			
							2590	2595	2600	
NR38	40	DFS-s OFDM	PI/2 BPSK	1RB Low	0	23.50	518000	519000	520000	
			QPSK	1RB Low	0	23.50				22.73
				1RB Mid	136	23.50				22.73
				1RB High	270	23.50				22.98
				50% RB Low	0	23.50				22.65
				50% RB Mid	68	23.50				23.02
				50% RB High	137	23.50				22.99
				100% RB	0	23.50				22.81
			16QAM	1RB Low	0	23.50				22.96
			64QAM	1RB Low	0	23.50				22.95
			256QAM	1RB Low	0	23.50				22.97
			CP-OFDM	QPSK	1RB Low	0				23.50
							22.66			
							Frequency (MHz) / Channel			
							2590	2595	2600	
							518000	519000	560000	
		20	DFS-s OFDM	QPSK	1RB Low	0	23.50			
					50% RB Low	0	23.50			
										23.01
								Frequency (MHz) / Channel		
							2577.5	2595	2612.5	
							515500	519000	522500	
		15	DFS-s OFDM	QPSK	1RB Low	0	23.50			
					50% RB Low	0	23.50			
										22.97
								Frequency (MHz) / Channel		
							2575	2595	2615	
							515000	519000	523000	
	10	DFS-s OFDM	QPSK	1RB Low	0	23.50				
				50% RB Low	0	23.50				22.85
									22.90	
							Frequency (MHz) / Channel			
						2572.5	2595	2617.5		
						514500	519000	523500		
	5	DFS-s OFDM	QPSK	1RB Low	0	23.50				
				50% RB Low	0	23.50				22.84
									23.04	

B.2.4.13 5G NR (FR1) Band 38 TDD – Tablet Mode – Antenna 5

Band	BW	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm)							
							Frequency (MHz) / Channel							
							2590	2595	2600					
NR38	40	DFS-s OFDM	PI/2 BPSK	1RB Low	0	20.50	518000	519000	520000					
			QPSK	1RB Low	0	20.50				19.63				
				1RB Mid	136	20.50				19.62				
				1RB High	270	20.50				19.78				
				50% RB Low	0	20.50				19.37				
				50% RB Mid	68	20.50				19.99				
				50% RB High	137	20.50				19.86				
				100% RB	0	20.50				19.78				
				16QAM	1RB Low	0				20.50	19.89			
			64QAM	1RB Low	0	20.50				19.60				
			256QAM	1RB Low	0	20.50				19.75				
			CP-OFDM	QPSK	1RB Low	0				20.50	19.74			
								Frequency (MHz) / Channel						
								2590	2595	2600				
								518000	519000	520000				
	20	DFS-s OFDM	QPSK	1RB Low	0	20.50	518000	519000	520000					
				50% RB Low	0	20.50				19.88				
											19.98			
											19.98			
								Frequency (MHz) / Channel						
								2577.5	2595	2612.5				
								515500	519000	522500				
	15	DFS-s OFDM	QPSK	1RB Low	0	20.50	518000	519000	520000					
				50% RB Low	0	20.50				19.91				
								20.02						
								Frequency (MHz) / Channel						
								2575	2595	2615				
								515000	519000	523000				
10	DFS-s OFDM	QPSK	1RB Low	0	20.50	518000	519000	520000						
			50% RB Low	0	20.50				19.99					
							19.95							
							Frequency (MHz) / Channel							
							2572.5	2595	2617.5					
							514500	519000	523500					
5	DFS-s OFDM	QPSK	1RB Low	0	20.50	518000	519000	520000						
			50% RB Low	0	20.50				19.79					
							20.03							

B.2.4.14 5G NR (FR1) Band 41 TDD – Laptop Mode – Antenna 5

Band	BW	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm)					
							Frequency (MHz) / Channel					
							2546	2569.5	2593	2616.5	2640	
NR41	100	DFS-s OFDM	PI/2 BPSK	1RB Low	0	21.00			19.55			
			QPSK	1RB Low	0	21.00			19.57			
				1RB Mid	136	21.00			20.54			
				1RB High	270	21.00			20.68			
				50% RB Low	0	21.00			20.57			
				50% RB Mid	68	21.00			20.84			
				50% RB High	137	21.00			21.00			
				100% RB	0	21.00			20.75			
			16QAM	1RB Low	0	21.00			19.70			
			64QAM	1RB Low	0	21.00			19.57			
	256QAM	1RB Low	0	21.00			19.66					
	CP-OFDM	QPSK	1RB Low	0	21.00			19.70				
								Frequency (MHz) / Channel				
								2541	2567	2593	2619	2645
								508200	513400	518600	523800	529000
	90	DFS-s OFDM	QPSK	1RB Low	0	21.00			19.72			
				50% RB Low	0	21.00			20.45			
								Frequency (MHz) / Channel				
								2536	2564.5	2593	2621.5	2650
								507200	512900	518600	524300	530000
	80	DFS-s OFDM	QPSK	1RB Low	0	21.00			19.88			
				50% RB Low	0	21.00			20.59			
								Frequency (MHz) / Channel				
								2526	2559.5	2593	2626.5	2660
								505200	511900	518600	525300	532000
	60	DFS-s OFDM	QPSK	1RB Low	0	21.00			20.44			
				50% RB Low	0	21.00			20.66			
								Frequency (MHz) / Channel				
2521								2557	2593	2629	2665	
							504200	511400	518600	525800	5330000	
50	DFS-s OFDM	QPSK	1RB Low	0	21.00			20.50				
			50% RB Low	0	21.00			20.63				
							Frequency (MHz) / Channel					
							2516	2554.5	2593	2631.5	2670	
							503200	510900	518600	526300	534000	
40	DFS-s OFDM	QPSK	1RB Low	0	21.00			20.32				
			50% RB Low	0	21.00			20.58				
							Frequency (MHz) / Channel					
							2506	2549.5	2593	2636.5	2680	
							501200	509900	518600	527300	536000	
20	DFS-s OFDM	QPSK	1RB Low	0	21.00			20.50				
			50% RB Low	0	21.00			20.55				

B.2.4.15 5G NR (FR1) Band 41 TDD – Tablet Mode – Antenna 5

Band	BW	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm)					
							Frequency (MHz) / Channel					
							2546	2569.5	2593	2616.5	2640	
							509200	513900	518600	523300	528000	
NR41	100	DFS-s OFDM	PI/2 BPSK	1RB Low	0	16.00			14.50			
			QPSK	1RB Low	0	16.00			14.51			
				1RB Mid	136	16.00			15.34			
				1RB High	270	16.00			15.63			
				50% RB Low	0	16.00			15.32			
				50% RB Mid	68	16.00			15.69			
				50% RB High	137	16.00			15.88			
				100% RB	0	16.00			15.52			
			16QAM	1RB Low	0	16.00			14.49			
			64QAM	1RB Low	0	16.00			14.45			
	256QAM	1RB Low	0	16.00			14.61					
	CP-OFDM	QPSK	1RB Low	0	16.00			14.56				
								Frequency (MHz) / Channel				
								2541	2567	2593	2619	2645
								508200	513400	518600	523800	529000
	90	DFS-s OFDM	QPSK	1RB Low	0	16.00			14.50			
				50% RB Low	0	16.00			15.31			
								Frequency (MHz) / Channel				
								2536	2564.5	2593	2621.5	2650
								507200	512900	518600	524300	530000
	80	DFS-s OFDM	QPSK	1RB Low	0	16.00			14.69			
				50% RB Low	0	16.00			15.38			
								Frequency (MHz) / Channel				
								2526	2559.5	2593	2626.5	2660
							505200	511900	518600	525300	532000	
60	DFS-s OFDM	QPSK	1RB Low	0	16.00			15.14				
			50% RB Low	0	16.00			15.36				
							Frequency (MHz) / Channel					
							2521	2557	2593	2629	2665	
							504200	511400	518600	525800	5330000	
50	DFS-s OFDM	QPSK	1RB Low	0	16.00			15.27				
			50% RB Low	0	16.00			15.40				
							Frequency (MHz) / Channel					
							2516	2554.5	2593	2631.5	2670	
							503200	510900	518600	526300	534000	
40	DFS-s OFDM	QPSK	1RB Low	0	16.00			15.13				
			50% RB Low	0	16.00			15.40				
							Frequency (MHz) / Channel					
							2506	2549.5	2593	2636.5	2680	
							501200	509900	518600	527300	536000	
20	DFS-s OFDM	QPSK	1RB Low	0	16.00			15.29				
			50% RB Low	0	16.00			15.29				

B.2.4.16 5G NR (FR1) Band 41 TDD – Laptop Mode – Antenna 8

Band	BW	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm)					
							Frequency (MHz) / Channel					
							2546	2569.5	2593	2616.5	2640	
NR41	100	DFS-s OFDM	PI/2 BPSK	1RB Low	0	17.00			15.90			
			QPSK	1RB Low	0	17.00			15.83			
				1RB Mid	136	17.00			16.60			
				1RB High	270	17.00			16.14			
				50% RB Low	0	17.00			16.78			
				50% RB Mid	68	17.00			16.77			
				50% RB High	137	17.00			16.52			
				100% RB	0	17.00			16.58			
			16QAM	1RB Low	0	17.00			15.85			
			64QAM	1RB Low	0	17.00			16.04			
	256QAM	1RB Low	0	17.00			16.03					
	CP-OFDM	QPSK	1RB Low	0	17.00			15.99				
								Frequency (MHz) / Channel				
								2541	2567	2593	2619	2645
								508200	513400	518600	523800	529000
	90	DFS-s OFDM	QPSK	1RB Low	0	17.00			16.13			
				50% RB Low	0	17.00			16.70			
								Frequency (MHz) / Channel				
								2536	2564.5	2593	2621.5	2650
								507200	512900	518600	524300	530000
	80	DFS-s OFDM	QPSK	1RB Low	0	17.00			16.25			
				50% RB Low	0	17.00			16.71			
								Frequency (MHz) / Channel				
								2526	2559.5	2593	2626.5	2660
								505200	511900	518600	525300	532000
	60	DFS-s OFDM	QPSK	1RB Low	0	17.00			16.61			
				50% RB Low	0	17.00			16.68			
								Frequency (MHz) / Channel				
							2521	2557	2593	2629	2665	
							504200	511400	518600	525800	5330000	
50	DFS-s OFDM	QPSK	1RB Low	0	17.00			16.58				
			50% RB Low	0	17.00			16.59				
							Frequency (MHz) / Channel					
							2516	2554.5	2593	2631.5	2670	
							503200	510900	518600	526300	534000	
40	DFS-s OFDM	QPSK	1RB Low	0	17.00			16.21				
			50% RB Low	0	17.00			16.49				
							Frequency (MHz) / Channel					
							2506	2549.5	2593	2636.5	2680	
							501200	509900	518600	527300	536000	
20	DFS-s OFDM	QPSK	1RB Low	0	17.00			16.39				
			50% RB Low	0	17.00			16.45				

B.2.4.17 5G NR (FR1) Band 41 TDD – Tablet Mode – Antenna 8

Band	BW	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm)					
							Frequency (MHz) / Channel					
							2546	2569.5	2593	2616.5	2640	
NR41	100	DFS-s OFDM	PI/2 BPSK	1RB Low	0	17.50			16.05			
			QPSK	1RB Low	0	17.50			16.07			
				1RB Mid	136	17.50			16.86			
				1RB High	270	17.50			16.26			
				50% RB Low	0	17.50			16.90			
				50% RB Mid	68	17.50			17.03			
				50% RB High	137	17.50			16.83			
				100% RB	0	17.50			16.77			
			16QAM	1RB Low	0	17.50			16.18			
			64QAM	1RB Low	0	17.50			16.05			
	256QAM	1RB Low	0	17.50			16.28					
	CP-OFDM	QPSK	1RB Low	0	17.50			16.18				
								Frequency (MHz) / Channel				
								2541	2567	2593	2619	2645
								508200	513400	518600	523800	529000
	90	DFS-s OFDM	QPSK	1RB Low	0	17.50			16.23			
				50% RB Low	0	17.50			16.93			
								Frequency (MHz) / Channel				
								2536	2564.5	2593	2621.5	2650
								507200	512900	518600	524300	530000
	80	DFS-s OFDM	QPSK	1RB Low	0	17.50			16.42			
				50% RB Low	0	17.50			16.87			
								Frequency (MHz) / Channel				
								2526	2559.5	2593	2626.5	2660
								505200	511900	518600	525300	532000
	60	DFS-s OFDM	QPSK	1RB Low	0	17.50			16.81			
				50% RB Low	0	17.50			16.94			
								Frequency (MHz) / Channel				
							2521	2557	2593	2629	2665	
							504200	511400	518600	525800	5330000	
50	DFS-s OFDM	QPSK	1RB Low	0	17.50			16.74				
			50% RB Low	0	17.50			16.86				
							Frequency (MHz) / Channel					
							2516	2554.5	2593	2631.5	2670	
							503200	510900	518600	526300	534000	
40	DFS-s OFDM	QPSK	1RB Low	0	17.50			16.52				
			50% RB Low	0	17.50			16.85				
							Frequency (MHz) / Channel					
							2506	2549.5	2593	2636.5	2680	
							501200	509900	518600	527300	536000	
20	DFS-s OFDM	QPSK	1RB Low	0	17.50			16.65				
			50% RB Low	0	17.50			16.72				

B.2.4.18 5G NR (FR1) Band 66 FDD – Laptop Mode – Antenna 5

Band	BW	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm)			
							Frequency (MHz) / Channel			
							1730	1745	1760	
NR66	40	DFS-s OFDM	PI/2 BPSK	1RB Low	0	21.50	346000	349000	352000	
			QPSK	1RB Low	0	21.50		19.96		
				1RB Mid	136	21.50		20.14		
				1RB High	270	21.50		21.10		
				50% RB Low	0	21.50		20.69		
				50% RB Mid	68	21.50		20.57		
				50% RB High	137	21.50		20.92		
				100% RB	0	21.50		20.85		
			16QAM	1RB Low	0	21.50		20.70		
			64QAM	1RB Low	0	21.50		20.18		
			256QAM	1RB Low	0	21.50		20.00		
			CP-OFDM	QPSK	1RB Low	0	21.50		20.21	
									20.03	
									Frequency (MHz) / Channel	
							1725	1745	1765	
							345000	349000	353000	
		30	DFS-s OFDM	QPSK	1RB Low	0	21.50		20.27	
					50% RB Low	0	21.50		20.64	
								Frequency (MHz) / Channel		
							1720	1745	1770	
							344000	349000	354000	
		20	DFS-s OFDM	QPSK	1RB Low	0	21.50		20.58	
					50% RB Low	0	21.50		20.82	
								Frequency (MHz) / Channel		
							1717.5	1745	1772.5	
							343500	349000	354500	
		15	DFS-s OFDM	QPSK	1RB Low	0	21.50		20.77	
					50% RB Low	0	21.50		20.95	
								Frequency (MHz) / Channel		
							1715	1745	1775	
						343000	349000	355000		
	10	DFS-s OFDM	QPSK	1RB Low	0	21.50		20.79		
				50% RB Low	0	21.50		20.78		
							Frequency (MHz) / Channel			
						1712.5	1745	1745		
						342500	349000	355500		
	5	DFS-s OFDM	QPSK	1RB Low	0	21.50		21.02		
				50% RB Low	0	21.50		21.07		

B.2.4.19 5G NR (FR1) Band 66 FDD – Tablet Mode – Antenna 5

Band	BW	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm)			
							Frequency (MHz) / Channel			
							1730	1745	1760	
NR66	40	DFS-s OFDM	PI/2 BPSK	1RB Low	0	18.00	346000	349000	352000	
			QPSK	1RB Low	0	18.00		16.93		
				1RB Mid	136	18.00		16.87		
				1RB High	270	18.00		17.83		
				50% RB Low	0	18.00		17.39		
				50% RB Mid	68	18.00		17.37		
				50% RB High	137	18.00		17.82		
				100% RB	0	18.00		17.70		
			16QAM	1RB Low	0	18.00		17.51		
			64QAM	1RB Low	0	18.00		16.87		
			256QAM	1RB Low	0	18.00		16.62		
			CP-OFDM	QPSK	1RB Low	0	18.00		16.96	
									16.74	
									Frequency (MHz) / Channel	
							1725	1745	1765	
							345000	349000	353000	
		30	DFS-s OFDM	QPSK	1RB Low	0	18.00		17.18	
					50% RB Low	0	18.00		17.55	
								Frequency (MHz) / Channel		
							1720	1745	1770	
							344000	349000	354000	
		20	DFS-s OFDM	QPSK	1RB Low	0	18.00		14.50	
					50% RB Low	0	18.00		17.68	
								Frequency (MHz) / Channel		
							1717.5	1745	1772.5	
							343500	349000	354500	
		15	DFS-s OFDM	QPSK	1RB Low	0	18.00		17.58	
					50% RB Low	0	18.00		17.77	
							Frequency (MHz) / Channel			
						1715	1745	1775		
						343000	349000	355000		
	10	DFS-s OFDM	QPSK	1RB Low	0	18.00		17.63		
				50% RB Low	0	18.00		17.66		
							Frequency (MHz) / Channel			
						1712.5	1745	1745		
						342500	349000	355500		
	5	DFS-s OFDM	QPSK	1RB Low	0	18.00		17.80		
				50% RB Low	0	18.00		17.81		

B.2.4.20 5G NR (FR1) Band 66 FDD – Laptop Mode – Antenna 8

Band	BW	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm)			
							Frequency (MHz) / Channel			
							1730	1745	1760	
NR66	40	DFS-s OFDM	PI/2 BPSK	1RB Low	0	17.50	346000	349000	352000	
			QPSK	1RB Low	0	17.50		16.03		
				1RB Mid	136	17.50		16.06		
				1RB High	270	17.50		17.10		
				50% RB Low	0	17.50		16.69		
				50% RB Mid	68	17.50		16.52		
				50% RB High	137	17.50		17.03		
				100% RB	0	17.50		16.99		
			16QAM	1RB Low	0	17.50		16.70		
			64QAM	1RB Low	0	17.50		15.99		
			256QAM	1RB Low	0	17.50		15.85		
			CP-OFDM	QPSK	1RB Low	0	17.50		16.39	
									16.04	
							Frequency (MHz) / Channel			
							1725	1745	1765	
							345000	349000	353000	
		30	DFS-s OFDM	QPSK	1RB Low	0	17.50		16.41	
					50% RB Low	0	17.50		16.75	
								Frequency (MHz) / Channel		
							1720	1745	1770	
							344000	349000	354000	
		20	DFS-s OFDM	QPSK	1RB Low	0	17.50		16.61	
					50% RB Low	0	17.50		16.92	
								Frequency (MHz) / Channel		
							1717.5	1745	1772.5	
							343500	349000	354500	
		15	DFS-s OFDM	QPSK	1RB Low	0	17.50		16.78	
					50% RB Low	0	17.50		17.02	
							Frequency (MHz) / Channel			
						1715	1745	1775		
						343000	349000	355000		
	10	DFS-s OFDM	QPSK	1RB Low	0	17.50		16.85		
				50% RB Low	0	17.50		16.92		
							Frequency (MHz) / Channel			
						1712.5	1745	1745		
						342500	349000	355500		
	5	DFS-s OFDM	QPSK	1RB Low	0	17.50		16.98		
				50% RB Low	0	17.50		17.12		

B.2.4.21 5G NR (FR1) Band 66 FDD – Tablet Mode – Antenna 8

Band	BW	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm)			
							Frequency (MHz) / Channel			
							1730	1745	1760	
NR66	40	DFS-s OFDM	PI/2 BPSK	1RB Low	0	16.00	346000	349000	352000	
			QPSK	1RB Low	0	16.00		14.92		
				1RB Mid	136	16.00		14.95		
				1RB High	270	16.00		16.00		
				50% RB Low	0	16.00		15.66		
				50% RB Mid	68	16.00		15.50		
				50% RB High	137	16.00		15.96		
				100% RB	0	16.00		15.93		
			16QAM	1RB Low	0	16.00		15.65		
			64QAM	1RB Low	0	16.00		14.94		
			256QAM	1RB Low	0	16.00		14.96		
			CP-OFDM	QPSK	1RB Low	0	16.00		15.08	
									14.97	
									Frequency (MHz) / Channel	
							1725	1745	1765	
							345000	349000	353000	
		30	DFS-s OFDM	QPSK	1RB Low	0	16.00		15.21	
					50% RB Low	0	16.00		15.64	
								Frequency (MHz) / Channel		
							1720	1745	1770	
							344000	349000	354000	
		20	DFS-s OFDM	QPSK	1RB Low	0	16.00		15.59	
					50% RB Low	0	16.00		15.90	
								Frequency (MHz) / Channel		
							1717.5	1745	1772.5	
							343500	349000	354500	
		15	DFS-s OFDM	QPSK	1RB Low	0	16.00		15.77	
					50% RB Low	0	16.00		15.95	
								Frequency (MHz) / Channel		
							1715	1745	1775	
						343000	349000	355000		
	10	DFS-s OFDM	QPSK	1RB Low	0	16.00		15.75		
				50% RB Low	0	16.00		15.86		
							Frequency (MHz) / Channel			
						1712.5	1745	1745		
						342500	349000	355500		
	5	DFS-s OFDM	QPSK	1RB Low	0	16.00		15.96		
				50% RB Low	0	16.00		16.00		

B.2.4.22 5G NR (FR1) Band 71 FDD – Laptop & Tablet Modes – Antenna 5

Band	BW	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm)			
							Frequency (MHz) / Channel			
							673.0	680.5	688.0	
							134600	136100	137600	
NR71	20	DFS-s OFDM	PI/2 BPSK	1RB Low	0	23.00		21.88		
			QPSK	1RB Low	0	23.00		21.92		
				1RB Mid	50	23.00		22.16		
				1RB High	99	23.00		22.11		
				50% RB Low	0	23.00		22.15		
				50% RB Mid	25	23.00		22.25		
				50% RB High	49	23.00		22.28		
				100% RB	0	23.00		22.20		
			16QAM	1RB Low	0	23.00		22.07		
			64QAM	1RB Low	0	23.00		22.15		
	256QAM	1RB Low	0	23.00		22.14				
	CP-OFDM	QPSK	1RB Low	0	23.00		21.90			
								Frequency (MHz) / Channel		
								670.5	680.5	690.5
								134100	136100	138100
	15	DFS-s OFDM	QPSK	1RB Low	0	23.00		22.06		
				50% RB Low	0	23.00		22.29		
								Frequency (MHz) / Channel		
								668.0	680.5	693.0
								133600	136100	138600
10	DFS-s OFDM	QPSK	1RB Low	0	23.00		22.01			
			50% RB Low	0	23.00		22.01			
							Frequency (MHz) / Channel			
							665.5	680.5	695.5	
							133100	136100	139100	
5	DFS-s OFDM	QPSK	1RB Low	0	23.00		22.21			
			50% RB Low	0	23.00		22.21			

B.2.4.25 5G NR (FR1) Band 77 TDD – Laptop Mode – Antenna 8

Band	BW	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm)					
							Frequency (MHz) / Channel					
							3840	3795	3750	3885	3930	
NR77	100	DFS-s OFDM	PI/2 BPSK	1RB Low	0	14.50			14.06			
			QPSK	1RB Low	0	14.50			14.02			
				1RB Mid	136	14.50			14.36			
				1RB High	270	14.50			13.60			
				50% RB Low	0	14.50			14.37			
				50% RB Mid	68	14.50			14.44			
				50% RB High	137	14.50			14.23			
				100% RB	0	14.50			14.24			
			16QAM	1RB Low	0	14.50			14.14			
			64QAM	1RB Low	0	14.50			14.23			
	256QAM	1RB Low	0	14.50			13.99					
	CP-OFDM	QPSK	1RB Low	0	14.50			14.04				
								Frequency (MHz) / Channel				
								3840	3795	3750	3885	3930
								656600	653000	650000	659000	662000
	90	DFS-s OFDM	QPSK	1RB Low	0	14.50			14.10			
				50% RB Low	0	14.50			14.43			
								Frequency (MHz) / Channel				
								3840	3795	3750	3885	3930
								656600	653000	650000	659000	662000
	80	DFS-s OFDM	QPSK	1RB Low	0	14.50			14.11			
				50% RB Low	0	14.50			14.48			
								Frequency (MHz) / Channel				
								3840	3795	3750	3885	3930
								656600	653000	650000	659000	662000
	60	DFS-s OFDM	QPSK	1RB Low	0	14.50			14.08			
				50% RB Low	0	14.50			14.33			
								Frequency (MHz) / Channel				
							3840	3795	3750	3885	3930	
							656600	653000	650000	659000	662000	
50	DFS-s OFDM	QPSK	1RB Low	0	14.50			14.10				
			50% RB Low	0	14.50			14.37				
							Frequency (MHz) / Channel					
							3840	3795	3750	3885	3930	
							656600	653000	650000	659000	662000	
40	DFS-s OFDM	QPSK	1RB Low	0	14.50			13.75				
			50% RB Low	0	14.50			14.24				
							Frequency (MHz) / Channel					
							3840	3795	3750	3885	3930	
							656600	653000	650000	659000	662000	
20	DFS-s OFDM	QPSK	1RB Low	0	14.50			14.08				
			50% RB Low	0	14.50			14.30				

B.2.4.26 5G NR (FR1) Band 77 TDD – Tablet Mode – Antenna 8

Band	BW	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm)					
							Frequency (MHz) / Channel					
							3840	3795	3750	3885	3930	
NR77	100	DFS-s OFDM	PI/2 BPSK	1RB Low	0	14.00			13.24			
			QPSK	1RB Low	0	14.00			13.20			
				1RB Mid	136	14.00			13.59			
				1RB High	270	14.00			12.90			
				50% RB Low	0	14.00			13.52			
				50% RB Mid	68	14.00			13.69			
				50% RB High	137	14.00			13.51			
				100% RB	0	14.00			13.47			
			16QAM	1RB Low	0	14.00			13.31			
			64QAM	1RB Low	0	14.00			13.51			
	256QAM	1RB Low	0	14.00			13.16					
	CP-OFDM	QPSK	1RB Low	0	14.00			13.33				
								Frequency (MHz) / Channel				
								3840	3795	3750	3885	3930
								656600	653000	650000	659000	662000
	90	DFS-s OFDM	QPSK	1RB Low	0	14.00			13.32			
				50% RB Low	0	14.00			13.65			
								Frequency (MHz) / Channel				
								3840	3795	3750	3885	3930
								656600	653000	650000	659000	662000
	80	DFS-s OFDM	QPSK	1RB Low	0	14.00			13.37			
				50% RB Low	0	14.00			13.64			
								Frequency (MHz) / Channel				
								3840	3795	3750	3885	3930
								656600	653000	650000	659000	662000
	60	DFS-s OFDM	QPSK	1RB Low	0	14.00			13.30			
				50% RB Low	0	14.00			13.45			
								Frequency (MHz) / Channel				
							3840	3795	3750	3885	3930	
							656600	653000	650000	659000	662000	
50	DFS-s OFDM	QPSK	1RB Low	0	14.00			13.26				
			50% RB Low	0	14.00			13.48				
							Frequency (MHz) / Channel					
							3840	3795	3750	3885	3930	
							656600	653000	650000	659000	662000	
40	DFS-s OFDM	QPSK	1RB Low	0	14.00			12.96				
			50% RB Low	0	14.00			13.41				
							Frequency (MHz) / Channel					
							3840	3795	3750	3885	3930	
							656600	653000	650000	659000	662000	
20	DFS-s OFDM	QPSK	1RB Low	0	14.00			13.25				
			50% RB Low	0	14.00			13.45				

B.2.4.28 5G NR (FR1) Band 78 TDD – Tablet Mode – Antenna 5

Band	BW	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm) Antenna 8						
							Frequency (MHz) / Channel						
							3840	3795	3750	3885	3930		
NR78	100	DFS-s OFDM	PI/2 BPSK	1RB Low	0	14.00	656600	653000	650000	659000	662000	13.76	
			QPSK	1RB Low	0	14.00						13.65	
				1RB Mid	136	14.00						14.22	
				1RB High	270	14.00						13.86	
				50% RB Low	0	14.00						14.14	
				50% RB Mid	68	14.00						14.26	
				50% RB High	137	14.00						14.17	
				100% RB	0	14.00						14.11	
			16QAM	1RB Low	0	14.00						13.75	
			64QAM	1RB Low	0	14.00						13.98	
			256QAM	1RB Low	0	14.00						13.94	
			CP-OFDM	QPSK	1RB Low	0						14.00	13.88
								Frequency (MHz) / Channel					
								3840	3795	3750	3885	3930	
								656600	653000	650000	659000	662000	
	90	DFS-s OFDM	QPSK	1RB Low	0	14.00						13.84	
				50% RB Low	0	14.00						14.16	
								Frequency (MHz) / Channel					
								3840	3795	3750	3885	3930	
								656600	653000	650000	659000	662000	
	80	DFS-s OFDM	QPSK	1RB Low	0	14.00						13.71	
				50% RB Low	0	14.00						14.16	
								Frequency (MHz) / Channel					
								3840	3795	3750	3885	3930	
								656600	653000	650000	659000	662000	
	60	DFS-s OFDM	QPSK	1RB Low	0	14.00						13.89	
				50% RB Low	0	14.00						14.17	
								Frequency (MHz) / Channel					
							3840	3795	3750	3885	3930		
							656600	653000	650000	659000	662000		
50	DFS-s OFDM	QPSK	1RB Low	0	14.00						14.05		
			50% RB Low	0	14.00						14.25		
							Frequency (MHz) / Channel						
							3840	3795	3750	3885	3930		
							656600	653000	650000	659000	662000		
40	DFS-s OFDM	QPSK	1RB Low	0	14.00						13.78		
			50% RB Low	0	14.00						14.21		
							Frequency (MHz) / Channel						
							3840	3795	3750	3885	3930		
							656600	653000	650000	659000	662000		
20	DFS-s OFDM	QPSK	1RB Low	0	14.00						13.96		
			50% RB Low	0	14.00						14.33		

B.2.4.29 5G NR (FR1) Band 78 TDD – Laptop Mode – Antenna 8

Band	BW	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm) Antenna 8						
							Frequency (MHz) / Channel						
							3840	3795	3750	3885	3930		
NR78	100	DFS-s OFDM	PI/2 BPSK	1RB Low	0	15.00	656600	653000	650000	659000	662000	14.17	
			QPSK	1RB Low	0	15.00						14.12	
				1RB Mid	136	15.00						14.65	
				1RB High	270	15.00						14.22	
				50% RB Low	0	15.00						14.59	
				50% RB Mid	68	15.00						14.70	
				50% RB High	137	15.00						14.60	
				100% RB	0	15.00						14.55	
			16QAM	1RB Low	0	15.00						14.09	
			64QAM	1RB Low	0	15.00						14.26	
			256QAM	1RB Low	0	15.00						14.02	
			CP-OFDM	QPSK	1RB Low	0						15.00	14.17
								Frequency (MHz) / Channel					
								3840	3795	3750	3885	3930	
								656600	653000	650000	659000	662000	
	90	DFS-s OFDM	QPSK	1RB Low	0	15.00						14.26	
				50% RB Low	0	15.00						14.61	
								Frequency (MHz) / Channel					
								3840	3795	3750	3885	3930	
								656600	653000	650000	659000	662000	
	80	DFS-s OFDM	QPSK	1RB Low	0	15.00						14.33	
				50% RB Low	0	15.00						14.69	
								Frequency (MHz) / Channel					
								3840	3795	3750	3885	3930	
								656600	653000	650000	659000	662000	
	60	DFS-s OFDM	QPSK	1RB Low	0	15.00						14.40	
				50% RB Low	0	15.00						14.57	
								Frequency (MHz) / Channel					
							3840	3795	3750	3885	3930		
							656600	653000	650000	659000	662000		
50	DFS-s OFDM	QPSK	1RB Low	0	15.00						14.44		
			50% RB Low	0	15.00						14.56		
							Frequency (MHz) / Channel						
							3840	3795	3750	3885	3930		
							656600	653000	650000	659000	662000		
40	DFS-s OFDM	QPSK	1RB Low	0	15.00						14.02		
			50% RB Low	0	15.00						14.53		
							Frequency (MHz) / Channel						
							3840	3795	3750	3885	3930		
							656600	653000	650000	659000	662000		
20	DFS-s OFDM	QPSK	1RB Low	0	15.00						14.44		
			50% RB Low	0	15.00						14.57		

B.2.4.30 5G NR (FR1) Band 78 TDD – Tablet Mode – Antenna 8

Band	BW	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm) Antenna 8						
							Frequency (MHz) / Channel						
							3840	3795	3750	3885	3930		
NR78	100	DFS-s OFDM	PI/2 BPSK	1RB Low	0	14.50	656600	653000	650000	659000	662000	13.76	
			QPSK	1RB Low	0	14.50						13.65	
				1RB Mid	136	14.50						14.22	
				1RB High	270	14.50						13.86	
				50% RB Low	0	14.50						14.14	
				50% RB Mid	68	14.50						14.26	
				50% RB High	137	14.50						14.17	
				100% RB	0	14.50						14.11	
			16QAM	1RB Low	0	14.50						13.75	
			64QAM	1RB Low	0	14.50						13.98	
			256QAM	1RB Low	0	14.50						13.94	
			CP-OFDM	QPSK	1RB Low	0						14.50	13.88
								Frequency (MHz) / Channel					
								3840	3795	3750	3885	3930	
								656600	653000	650000	659000	662000	
	90	DFS-s OFDM	QPSK	1RB Low	0	14.50						13.84	
				50% RB Low	0	14.50						14.16	
								Frequency (MHz) / Channel					
								3840	3795	3750	3885	3930	
								656600	653000	650000	659000	662000	
	80	DFS-s OFDM	QPSK	1RB Low	0	14.50						13.71	
				50% RB Low	0	14.50						14.16	
								Frequency (MHz) / Channel					
								3840	3795	3750	3885	3930	
								656600	653000	650000	659000	662000	
	60	DFS-s OFDM	QPSK	1RB Low	0	14.50						13.89	
				50% RB Low	0	14.50						14.17	
								Frequency (MHz) / Channel					
							3840	3795	3750	3885	3930		
							656600	653000	650000	659000	662000		
50	DFS-s OFDM	QPSK	1RB Low	0	14.50						14.05		
			50% RB Low	0	14.50						14.25		
							Frequency (MHz) / Channel						
							3840	3795	3750	3885	3930		
							656600	653000	650000	659000	662000		
40	DFS-s OFDM	QPSK	1RB Low	0	14.50						13.78		
			50% RB Low	0	14.50						14.21		
							Frequency (MHz) / Channel						
							3840	3795	3750	3885	3930		
							656600	653000	650000	659000	662000		
20	DFS-s OFDM	QPSK	1RB Low	0	14.50						13.96		
			50% RB Low	0	14.50						14.33		

B.2.4.31 5G NR (FR1) UL Carrier Aggregation

For NR ULCA mode, each carrier transmits on separate antennas. Each exposure has been measured separately. For each, the highest standalone SAR conditions are added to derive the Total SAR. Refer to paragraph B.5.6

B.3 Tissue Parameters Measurement

Body TSL SAR System 2

Body TSL	Target TSL		Measured TSL		Deviation %		Date
Freq (MHz)	ϵ' (F/m)	σ (S/m)	ϵ' (F/m)	σ (S/m)	Deviation ϵ'	Deviation σ	
750	55.53	0.96	53.48	0.91	-3.69	-5.21	2022-04-20
	55.53	0.96	52.53	0.92	-5.4	-4.17	2022-06-14
835	55.15	0.99	53.24	0.94	-3.46	-5.05	2022-04-20
	55.15	0.99	55.35	0.98	0.36	-1.01	2022-05-30
1750	53.43	1.49	52.43	1.4	-1.87	-6.04	2022-04-20
1900	53.3	1.52	52.22	1.49	-2.03	-1.97	2022-04-20
	53.3	1.52	51.36	1.48	-3.64	-2.63	2022-04-25
2300	52.9	1.81	51.68	1.79	-2.31	-1.1	2022-04-20
2600	52.51	2.16	51.16	2.06	-2.57	-4.63	2022-04-20
	52.51	2.16	52.95	2.12	0.84	-1.85	2022-05-30
3700	51.05	3.55	50.97	3.24	-0.16	-8.73	2022-06-14

Body TSL SAR System 4

Body TSL	Target TSL		Measured TSL		Deviation %		Date
Freq (MHz)	ϵ' (F/m)	σ (S/m)	ϵ' (F/m)	σ (S/m)	Deviation ϵ'	Deviation σ	
750	55.53	0.96	54.84	0.91	-1.24	-5.21	2022-06-13
835	53.43	1.49	53.67	1.44	0.45	-3.36	2022-05-16
1750	53.3	1.52	51.67	1.63	-3.06	7.24	2022-05-09
1900	52.9	1.81	53.48	1.54	0.34	1.32	2022-05-16
	52.9	1.81	53.31	1.87	0.78	3.31	2022-05-19
2300	52.9	1.81	51.02	1.94	-3.55	7.18	2022-05-09
	52.9	1.81	53.0	1.84	0.19	1.66	2022-05-16
2600	52.51	2.16	52.54	2.12	0.06	-1.85	2022-05-16
	52.51	2.16	52.84	2.15	0.63	-0.46	2022-05-19
3700	51.05	3.55	50.61	3.25	-0.86	-8.45	2022-05-16
	51.05	3.55	50.78	3.29	-0.53	-7.32	2022-05-19

See Annex D below for more details.

B.4 System Check Measurements

Body Measurements SAR System #2

Frequency (MHz)	Average	Target SAR (W/kg)	Measured SAR (W/kg)	Deviation to target (%)	Limit (%)	Date
750	1g	8.75	8.88	1.49	±10	2022-04-21
	10g	5.72	5.82	1.75		2022-06-14
	1g	8.75	8.72	-0.37		2022-04-21
	10g	5.72	5.84	2.08		2022-05-31
835	1g	9.65	10.38	7.56		2022-04-26
	10g	6.32	6.74	6.65		2022-04-22
	1g	9.65	9.64	-0.10		2022-04-27
	10g	6.32	6.36	0.63		2022-04-21
1750	1g	37.10	35.40	-4.58		2022-04-21
	10g	19.60	19.00	-3.06		2022-04-21
1900	1g	40.30	36.40	-9.68		2022-06-01
	10g	21.00	19.24	-8.38		2022-06-14
	1g	40.30	38.80	-3.72		
	10g	21.00	20.20	-3.81		
2300	1g	47.90	48.20	0.63		
	10g	23.20	23.00	-0.86		
2600	1g	54.10	52.60	-2.77		
	10g	24.10	23.40	-2.90		
	1g	54.10	53.00	-2.03		
	10g	24.10	23.80	-1.24		
3700	1g	62.10	59.60	-4.03		
	10g	22.20	22.80	2.70		

Body Measurements SAR System #4

Frequency (MHz)	Average	Target SAR (W/kg)	Measured SAR (W/kg)	Deviation to target (%)	Limit (%)	Date	
750	1g	8.75	8.96	2.40	±10	2022-06-13	
	10g	5.72	5.84	2.10			
835	1g	9.65	10.14	5.08			2022-05-17
	10g	6.32	6.66	5.38			
1750	1g	37.10	34.80	-6.20			2022-05-12
	10g	19.60	18.78	-4.18			
1900	1g	40.30	41.60	3.23			2022-05-17
	10g	21.00	21.80	3.81			
	1g	40.30	39.80	-1.24			2022-05-19
	10g	21.00	20.80	-0.95			
2300	1g	47.90	44.00	-8.14			2022-05-17
	10g	23.20	21.20	-8.62			
2600	1g	54.10	49.60	-8.32			2022-05-17
	10g	24.10	22.40	-7.05			
	1g	54.10	49.40	-8.69			2022-05-19
	10g	24.10	22.40	-7.05			
3700	1g	62.10	58.00	-6.60		2022-05-17	
	10g	22.20	21.80	-1.80			
	1g	62.10	60.80	-2.09		2022-05-19	
	10g	22.20	22.60	1.80			

See Annex C

B.5 SAR Test Results

B.5.1 WCDMA

B.5.1.1 WCDMA Band II

Band	Antenna	BW (MHz)	Mod.	Channel Number	Freq (MHz)	Position	Scaling Factor (dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Band II	Ant 5	5	RMC 12.2kbps	9262	1852.4	Bottom Edge	0.26	0.89	0.94	
				9400	1880	Back Face	0.35	0.27	0.29	
						Bottom Edge	0.35	0.98	1.06	1
						Laptop	0.24	0.28	0.30	
				9538	1907.6	Bottom Edge	0.18	0.97	1.02	

B.5.1.2 WCDMA Band IV

and	Antenna	BW (MHz)	Mod.	Channel Number	Freq (MHz)	Position	Scaling Factor (dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Band IV	Ant 5	5	RMC 12.2kbps	1312	1712.4	Bottom Edge	0.03	0.79	0.79	2
				1413	1732.6	Back Face	0.09	0.23	0.23	
						Bottom Edge	0.09	0.79	0.81	
						Laptop	0.05	0.58	0.58	
				1513	1752.6	Bottom Edge	0.09	0.77	0.79	

B.5.1.3 WCDMA Band V

Band	Antenna	BW (MHz)	Mod.	Channel Number	Freq (MHz)	Position	Scaling Factor (dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Band V	Ant 5	5	RMC 12.2kbps	4183	836.6	Back Face	0.18	0.02	0.02	
						Bottom Edge	0.18	0.28	0.29	3
						Laptop	1.68	0.11	0.16	
						Right Edge	0.18	0.04	0.04	

B.5.2 LTE

B.5.2.1 LTE Band 5 FDD

Band	Antenna	BW (MHz)	Mod.	Channel Number	Freq (MHz)	Position	% RB Allocation	Scaling Factor (dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
LTE 5	Ant 5	10	QPSK	20525	836.5	Back Face	1RB Mid	0.21	0.11	0.12	
						Back Face	50RB Mid	0.27	0.11	0.12	
						Bottom Edge	1RB Mid	0.21	0.38	0.40	4
						Bottom Edge	50RB Mid	0.27	0.38	0.40	
						Right Edge	1RB Mid	0.21	0.06	0.07	
						Right Edge	50RB Mid	0.27	0.05	0.05	

UL CA 5B

UL CA shall be tested based on the worst-case SAR configuration determined from non-CA SAR testing result. The channel BW, channel number, RB allocation, etc. would be selected to allow contiguous CA of PCC and SCC. Uplink output power for UL CA is the total power measured across the PCC and SCC.

From the above table on standalone testing on LTE Band 5, bottom edge position was chosen as the configurations that give the highest SAR, thus, the same is used for UL CA testing.

Band	Ant.	Modulation / BW	PCC			SCC			Position	Scaling Factor (dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)
			Ch	Freq (MHz)	RB Allocation	Ch	Freq (MHz)	RB Allocation				
LTE 5B	Ant 5	QPSK / 10MHz	20850	2510	1RB High	21100	2535	1RB Low	Bottom Edge	0.77	0.20	0.24

PCC RB allocation settings for UL CA have been adjusted based on the worst-case power

B.5.2.2 LTE Band 7 FDD

Band	Antenna	BW (MHz)	Mod.	Channel Number	Freq (MHz)	Position	% RB Allocation	Scaling Factor (dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
LTE 7	Ant 5	20	QPSK	20850	2510	Bottom Edge	1RB Mid	0.95	0.83	1.04	
						Bottom Edge	50RB Mid	0.97	0.63	0.79	
						Laptop	1RB Mid	0.85	0.68	0.83	
						Laptop	50RB Mid	0.87	0.55	0.67	
				21100	2535	Back Face	1RB Mid	0.91	0.27	0.33	
						Back Face	50RB Mid	0.92	0.21	0.26	
						Bottom Edge	1RB Mid	0.91	0.69	0.85	
						Bottom Edge	50RB Mid	0.92	0.55	0.68	
						Bottom Edge	100RB Mid	0.90	0.56	0.68	
						Laptop	1RB Mid	0.78	0.78	0.93	
						Laptop	50RB Mid	0.79	0.63	0.75	
						Laptop	100RB Mid	0.86	0.61	0.74	
	21350	2560	Bottom Edge	1RB Mid	0.93	0.61	0.75				
			Bottom Edge	50RB Mid	0.92	0.39	0.48				
			Laptop	1RB Mid	0.76	0.86	1.02				
			Laptop	50RB Mid	0.76	0.82	0.98				
	Ant 8	20	QPSK	20850	2510	Left Edge	1RB Mid	0.69	0.98	1.14	5
						Left Edge	50RB Mid	0.73	0.81	0.96	
				21100	2535	Back Face	1RB Mid	0.62	0.21	0.24	
						Back Face	50RB Mid	0.68	0.16	0.18	
						Laptop	1RB Mid	0.62	0.68	0.79	
						Laptop	50RB Mid	0.68	0.66	0.77	
						Left Edge	1RB Mid	0.62	0.91	1.05	
						Left Edge	50RB Mid	0.68	0.69	0.81	
21350				2560	Left Edge	1RB Mid	0.67	0.73	0.85		
					Left Edge	50RB Mid	0.67	0.79	0.92		

UL CA 7C

UL CA shall be tested based on the worst-case SAR configuration determined from non-CA SAR testing result. The channel BW, channel number, RB allocation, etc. would be selected to allow contiguous CA of PCC and SCC. Uplink output power for UL CA is the total power measured across the PCC and SCC.

From the above table on standalone testing on LTE Band 7, laptop position on antenna 5 HTK, was chosen as the configurations that give the highest SAR, thus, the same is used for UL CA testing.

Band	Ant.	Modulation / BW	PCC			SCC			Position	Scaling Factor (dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)
			Ch	Freq (MHz)	RB Allocation	Ch	Freq (MHz)	RB Allocation				
LTE 7C	Ant 8	QPSK / 20MHz	20850	2510	1RB High	21100	2535	1RB Low	Left edge	0.19	0.63	0.66

PCC RB allocation settings for UL CA have been adjusted based on the worst-case power

B.5.2.3 LTE Band 12 FDD

Band	Antenna	BW (MHz)	Mod.	Channel Number	Freq (MHz)	Position	% RB Allocation	Scaling Factor (dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
LTE 12	Ant 5	10	QPSK	23095	707.5	Back Face	1RB Mid	1.20	0.24	0.32	
						Back Face	50RB Mid	1.25	0.19	0.25	
						Bottom Edge	1RB Mid	1.20	0.60	0.79	6
						Bottom Edge	50RB Mid	1.25	0.47	0.62	
						Laptop	1RB Mid	0.62	0.53	0.62	
						Laptop	50RB Mid	0.68	0.47	0.55	
						Laptop	100RB Mid	0.66	0.49	0.57	

B.5.2.4 LTE Band 13 FDD

Band	Antenna	BW (MHz)	Mod.	Channel Number	Freq (MHz)	Position	% RB Allocation	Scaling Factor (dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
LTE 13	Ant 5	10	QPSK	23230	782	Back Face	1RB Mid	0.75	0.46	0.55	
						Back Face	50RB Mid	0.76	0.36	0.43	
						Bottom Edge	50RB Mid	0.75	0.53	0.63	7
						Bottom Edge	100RB Mid	0.76	0.44	0.52	
						Laptop	1RB Mid	0.67	0.43	0.51	
						Laptop	50RB Mid	0.73	0.38	0.45	
						Right Edge	1RB Mid	0.75	0.05	0.06	
						Right Edge	50RB Mid	0.76	0.04	0.05	

B.5.2.5 LTE Band 14 FDD

Band	Antenna	BW (MHz)	Mod.	Channel Number	Freq (MHz)	Position	% RB Allocation	Scaling Factor (dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
LTE 14	Ant 5	10	QPSK	23330	793	Back Face	1RB Mid	0.71	0.43	0.50	
						Back Face	50RB Mid	0.75	0.34	0.40	
						Bottom Edge	50RB Mid	0.71	0.52	0.62	8
						Bottom Edge	100RB Mid	0.75	0.41	0.49	
						Laptop	1RB Mid	0.69	0.40	0.47	
						Laptop	50RB Mid	0.74	0.36	0.42	
						Right Edge	1RB Mid	0.71	0.05	0.06	
						Right Edge	50RB Mid	0.75	0.04	0.05	

B.5.2.6 LTE Band 17 FDD

Band	Antenna	BW (MHz)	Mod.	Channel Number	Freq (MHz)	Position	% RB Allocation	Scaling Factor (dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
LTE 17	Ant 5	10	QPSK	23790	710	Back Face	1RB Mid	0.25	0.04	0.05	
						Back Face	50RB Mid	0.27	0.03	0.04	
						Bottom Edge	1RB Mid	0.25	0.93	0.98	9
						Bottom Edge	50RB Mid	0.27	0.73	0.77	
						Bottom Edge	100RB Mid	0.27	0.72	0.76	

B.5.2.7 LTE Band 25 FDD

Band	Antenna	BW (MHz)	Mod.	Channel Number	Freq (MHz)	Position	% RB Allocation	Scaling Factor (dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #			
LTE 25	Ant 5	20	QPSK	26140	1860	Bottom Edge	1RB Mid	0.34	0.94	1.02				
						Bottom Edge	50RB Mid	0.32	0.71	0.76				
				26365	1882.5	Back Face	1RB Mid	0.36	0.60	0.66				
						Back Face	50RB Mid	0.36	0.47	0.51				
						Bottom Edge	1RB Mid	0.43	0.70	0.77				
						Bottom Edge	50RB Mid	0.36	0.90	0.98				
						Bottom Edge	100RB Mid	0.36	0.72	0.78				
						Laptop	1RB Mid	0.78	0.64	0.76				
				26590	1905	Laptop	50RB Mid	0.74	0.53	0.62				
						Bottom Edge	1RB Mid	0.21	0.87	0.91				
				Ant 8	20	QPSK	26140	1860	Bottom Edge	50RB Mid	0.29	0.67	0.72	
									Laptop	1RB Mid	0.77	0.76	0.90	
	26365	1882.5	Laptop				50RB Mid	0.72	0.35	0.41				
			Left Edge				1RB Mid	0.73	1.04	1.23				
			Left Edge				50RB Mid	0.72	0.83	0.98				
			Back Face				1RB Mid	0.73	0.16	0.19				
			Back Face				50RB Mid	0.72	0.12	0.15				
			Laptop				1RB Mid	0.70	0.78	0.91				
			Laptop				50RB Mid	0.70	0.60	0.70				
			Laptop				100RB Mid	0.76	0.58	0.69				
	26590	1905	Left Edge				1RB Mid	0.73	0.77	0.91				
			Left Edge				50RB Mid	0.72	0.87	1.02				
			Left Edge	100RB Mid	0.73	0.85	1.00							
			Laptop	1RB Mid	0.59	0.79	0.91							
						Laptop	50RB Mid	0.62	0.59	0.69				
						Left Edge	1RB Mid	0.72	0.85	1.00				
						Left Edge	50RB Mid	0.73	1.11	1.31	10			

B.5.2.8 LTE Band 26 FDD

Band	Antenna	BW (MHz)	Mod.	Channel Number	Freq (MHz)	Position	% RB Allocation	Scaling Factor (dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
LTE 26	Ant 5	15	QPSK	26865	831.5	Back Face	1RB Mid	0.63	0.33	0.38	
						Back Face	50RB Mid	0.76	0.27	0.32	
						Bottom Edge	1RB Mid	0.63	0.43	0.49	
						Bottom Edge	50RB Mid	0.76	0.45	0.53	11
						Laptop	1RB Mid	0.62	0.31	0.35	
						Laptop	50RB Mid	0.67	0.26	0.30	
						Right Edge	1RB Mid	0.63	0.06	0.07	
						Right Edge	50RB Mid	0.76	0.05	0.05	

B.5.2.9 LTE Band 30 FDD

Band	Antenna	BW (MHz)	Mod.	Channel Number	Freq (MHz)	Position	% RB Allocation	Scaling Factor (dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
LTE 30	Ant 5	10	QPSK	27710	2310	Back Face	1RB Mid	1.46	0.18	0.24	
						Back Face	50RB Mid	1.44	0.14	0.19	
						Bottom Edge	1RB Mid	1.46	0.82	1.14	12
						Bottom Edge	50RB Mid	1.44	0.59	0.82	
						Laptop	1RB Mid	1.49	0.64	0.90	
						Laptop	50RB Mid	1.33	0.62	0.84	
						Laptop	100RB Mid	1.34	0.49	0.66	
						Back Face	1RB Mid	1.18	0.17	0.22	
	Ant 8	10	QPSK	27710	2310	Back Face	50RB Mid	1.23	0.13	0.18	
						Laptop	1RB Mid	1.16	0.74	0.97	
						Laptop	50RB Mid	1.19	0.48	0.64	
						Laptop	100RB Mid	1.30	0.53	0.72	
						Left Edge	1RB Mid	1.18	0.60	0.78	
						Left Edge	50RB Mid	1.23	0.67	0.89	
						Left Edge	100RB Mid	1.32	0.64	0.87	

B.5.2.10 LTE Band 38 FDD

Band	Antenna	BW (MHz)	Mod.	Channel Number	Freq (MHz)	Position	% RB Allocation	Scaling Factor (dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
LTE 38	Ant 5	20	QPSK	37850	2580	Bottom Edge	1RB Mid	0.42	0.99	1.09	
						Bottom Edge	50RB Mid	0.32	0.80	0.86	
						Laptop	1RB Mid	1.35	0.36	0.49	
						Laptop	50RB Mid	1.34	0.65	0.88	
				38000	2595	Back Face	1RB Mid	0.23	0.34	0.35	
						Back Face	50RB Mid	0.33	0.26	0.28	
						Bottom Edge	1RB Mid	0.23	0.90	0.95	
						Bottom Edge	50RB Mid	0.42	0.90	0.99	
						Bottom Edge	100RB Mid	0.33	0.71	0.77	
						Laptop	1RB Mid	0.31	0.72	0.77	
						Laptop	50RB Mid	1.20	0.85	1.12	13
						Laptop	100RB Mid	1.28	0.68	0.91	
						Right Edge	1RB Mid	1.31	0.63	0.85	
						Right Edge	50RB Mid	0.23	0.05	0.05	
				38150	2610	Bottom Edge	1RB Mid	0.33	0.01	0.01	
						Bottom Edge	50RB Mid	0.28	0.65	0.69	
						Laptop	1RB Mid	0.28	0.68	0.73	
						Laptop	50RB Mid	1.23	0.76	1.01	

UL CA 38C

UL CA shall be tested based on the worst-case SAR configuration determined from non-CA SAR testing result. The channel BW, channel number, RB allocation, etc. would be selected to allow contiguous CA of PCC and SCC. Uplink output power for UL CA is the total power measured across the PCC and SCC.

From the above table on standalone testing on LTE Band38, laptop position on antenna 5 was chosen as the configurations that give the highest SAR, thus, the same is used for UL CA testing.

Band	Ant.	Modulation / BW	PCC			SCC			Position	Scaling Factor (dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)
			Ch	Freq (MHz)	RB Allocation	Ch	Freq (MHz)	RB Allocation				
LTE 38C	5	QPSK / 20MHz	37901	2585.1	1RB High	38099	2604.9	1RB Low	Laptop	1.39	0.39	0.54

PCC RB allocation settings for UL CA have been adjusted based on the worst-case power

B.5.2.11 LTE Band 41 TDD

Band	Antenna	BW (MHz)	Mod.	Channel Number	Freq (MHz)	Position	% RB Allocation	Scaling Factor (dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
LTE 41	Ant 5	20	QPSK	40620	2593	Back Face	1RB Mid	0.91	0.22	0.27	
						Back Face	50RB Mid	0.96	0.06	0.07	
						Bottom Edge	1RB Mid	0.91	0.33	0.41	
						Bottom Edge	50RB Mid	0.96	0.27	0.33	
						Laptop	1RB Mid	0.85	0.26	0.32	
						Laptop	50RB Mid	0.84	0.22	0.26	
						Right Edge	1RB Mid	0.91	0.05	0.06	
						Right Edge	50RB Mid	0.96	0.09	0.11	
	Ant 8	20	QPSK	40620	2593	Back Face	1RB Mid	1.00	0.12	0.15	
						Back Face	50RB Mid	1.04	0.10	0.12	
						Laptop	1RB Mid	0.52	0.49	0.55	
						Laptop	50RB Mid	0.58	0.38	0.44	
						Left Edge	1RB Mid	1.00	0.47	0.59	13
						Left Edge	50RB Mid	1.04	0.37	0.47	

UL CA 41C

UL CA shall be tested based on the worst-case SAR configuration determined from non-CA SAR testing result. The channel BW, channel number, RB allocation, etc. would be selected to allow contiguous CA of PCC and SCC. Uplink output power for UL CA is the total power measured across the PCC and SCC.

From the above table on standalone testing on LTE Band41, left edge position on antenna 8 was chosen as the configurations that give the highest SAR, thus, the same is used for UL CA testing.

Band	Ant.	Modulation / BW	PCC			SCC			Position	Scaling Factor (dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)
			Ch	Freq (MHz)	RB Allocation	Ch	Freq (MHz)	RB Allocation				
LTE 41C	Ant 8	QPSK / 20MHz	40521	2583.1	1RB High	40719	2602.9	1RB Low	Left edge	0.28	0.21	0.22

PCC RB allocation settings for UL CA have been adjusted based on the worst-case power

B.5.2.12 LTE Band 48 TDD

Band	Antenna	BW (MHz)	Mod.	Channel Number	Freq (MHz)	Position	% RB Allocation	Scaling Factor (dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
LTE 48	Ant 8	20	QPSK	55990	3625	Back Face	1RB Mid	0.83	0.25	0.30	
						Back Face	50RB Mid	0.90	0.19	0.23	
						Laptop	1RB Mid	1.33	0.43	0.59	
						Laptop	50RB Mid	1.33	0.34	0.46	
						Left Edge	1RB Mid	0.83	0.60	0.72	14
						Left Edge	50RB Mid	0.90	0.47	0.58	

UL CA 48C

UL CA shall be tested based on the worst-case SAR configuration determined from non-CA SAR testing result. The channel BW, channel number, RB allocation, etc. would be selected to allow contiguous CA of PCC and SCC. Uplink output power for UL CA is the total power measured across the PCC and SCC.

From the above table on standalone testing on LTE Band48, left edge position on antenna8 was chosen as the configurations that give the highest SAR, thus, the same is used for UL CA testing.

Band	Ant.	Modulation / BW	PCC			SCC			Position	Scaling Factor (dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)
			Ch	Freq (MHz)	RB Allocation	Ch	Freq (MHz)	RB Allocation				
LTE 48C	Ant 8	QPSK / 20MHz	55891	3615.1	1RB High	56089	3634.9	1RB Low	Left edge	0.87	0.48	0.59

PCC RB allocation settings for UL CA have been adjusted based on the worst-case power

B.5.2.13 LTE Band66 FDD

Band	Antenna	BW (MHz)	Mod.	Channel Number	Freq (MHz)	Position	% RB Allocation	Scaling Factor (dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
LTE 66	Ant 5	20	QPSK	132072	1720	Bottom Edge	1RB Mid	0.83	0.79	0.96	
						Bottom Edge	50RB Mid	0.78	0.62	0.74	
						Laptop	1RB Mid	1.22	0.55	0.72	
						Laptop	50RB Mid	1.20	0.43	0.57	
				132322	1745	Back Face	1RB Mid	0.80	0.44	0.52	
						Back Face	50RB Mid	0.76	0.34	0.41	
						Bottom Edge	1RB Mid	0.80	0.77	0.92	
						Bottom Edge	50RB Mid	0.76	0.65	0.77	
						Bottom Edge	100RB Mid	0.78	0.61	0.73	
						Laptop	1RB Mid	1.18	0.65	0.85	
						Laptop	50RB Mid	1.19	0.52	0.69	
						Laptop	100RB Mid	1.21	0.52	0.68	
	132572	1770	Bottom Edge	1RB Mid	0.78	0.81	0.97				
			Bottom Edge	50RB Mid	0.76	0.64	0.76				
			Laptop	1RB Mid	1.10	0.75	0.96				
			Laptop	50RB Mid	1.17	0.60	0.79				
	Ant 8	20	QPSK	132072	1720	Laptop	1RB Mid	0.68	0.87	1.02	
						Laptop	50RB Mid	0.64	0.60	0.69	
				132322	1745	Back Face	1RB Mid	1.02	0.09	0.11	
						Back Face	50RB Mid	1.06	0.07	0.09	
						Laptop	1RB Mid	0.62	0.84	0.97	
						Laptop	50RB Mid	0.55	0.67	0.76	
						Laptop	100RB Mid	0.51	0.64	0.72	
						Left Edge	1RB Mid	1.02	0.51	0.65	
132072				1720	Laptop	1RB Mid	0.56	0.99	1.13	15	
					Laptop	50RB Mid	0.56	0.66	0.75		

UL CA 66B, 66C

UL CA shall be tested based on the worst-case SAR configuration determined from non-CA SAR testing result. The channel BW, channel number, RB allocation, etc. would be selected to allow contiguous CA of PCC and SCC. Uplink output power for UL CA is the total power measured across the PCC and SCC.

From the above table on standalone testing on LTE Band66, laptop on Ant 8 position was chosen as the configurations that give the highest SAR, thus, the same is used for UL CA testing.

Band	Ant	Modulation / BW	PCC			SCC			Position	Scaling Factor (dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)
			Ch	Freq (MHz)	RB Allocation	Ch	Freq (MHz)	RB Allocation				
LTE 66B	Ant 8	QPSK / 20MHz	132373	1750.1	1RB High	132472	1760	1RB Low	Laptop	0.90	0.54	0.66
LTE 66C		QPSK / 20MHz	132323	2145.1	1RB High	132521	1764.9	1RB Low	Laptop	0.75	0.42	0.50

PCC RB allocation settings for UL CA have been adjusted based on the worst-case power

B.5.2.14 LTE Band 71 FDD

Band	Antenna	BW (MHz)	Mod.	Channel Number	Freq (MHz)	Position	% RB Allocation	Scaling Factor (dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
LTE 71	Ant 5	20	QPSK	133297	680.5	Back Face	1RB Mid	0.15	0.27	0.27	
						Back Face	50RB Mid	0.64	0.21	0.24	
						Bottom Edge	1RB Mid	0.15	0.76	0.78	16
						Bottom Edge	50RB Mid	0.64	0.58	0.67	
						Laptop	1RB Mid	0.15	0.24	0.24	
						Laptop	50RB Mid	0.64	0.23	0.26	
						Right Edge	1RB Mid	0.15	0.06	0.06	
						Right Edge	50RB Mid	0.64	0.05	0.05	

B.5.3 5G NR

B.5.3.1 5G NR 2 FDD

Band	Antenna	Modulation / BW	Channel Number	Freq (MHz)	Position	% RB Allocation	Scaling Factor (dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
NR2	Ant 8	QPSK / 20MHz	372000	1860	Left edge	1RB Mid	1.02	0.84	1.07	17
						50RB Mid	1.02	0.85	1.08	
			376000	1880	Back Face	1RB Mid	0.49	0.42	0.47	
						50RB Mid	0.54	0.44	0.50	
					Left edge	1RB Mid	0.49	0.92	1.03	
						50RB Mid	0.54	0.93	1.05	
					Laptop	100RB Low	0.60	0.88	1.01	
						1RB Mid	0.79	0.45	0.53	
			50RB Mid	0.83	0.44	0.53				
			380000	1900	Left edge	1RB Mid	0.56	0.88	1.00	
50RB Mid	0.48	0.91				1.01				

B.5.3.2 5G NR 5 FDD

Band	Antenna	Modulation / BW	Channel Number	Freq (MHz)	Position	% RB Allocation	Scaling Factor (dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
NR5	Ant 5	QPSK / 20MHz	167300	836.5	Back Face	1RB Mid	0.90	0.15	0.19	
						50RB Mid	0.87	0.15	0.19	
					Right edge	1RB Mid	0.90	0.04	0.04	
						50RB Mid	0.87	0.04	0.04	
					Bottom edge	1RB Mid	0.90	0.71	0.88	18
						50RB Mid	0.87	0.69	0.85	
						100RB Low	0.95	0.65	0.81	
					Laptop	1RB Mid	0.73	0.17	0.20	
						50RB Mid	0.66	0.20	0.23	

B.5.3.3 5G NR 7 FDD

Band	Antenna	Modulation / BW	Channel Number	Freq (MHz)	Position	% RB Allocation	Scaling Factor (dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
NR7	Ant 5	QPSK / 20MHz	507000	2535	Back Face	1RB Mid	0.79	0.19	0.22	
						50RB Mid	0.83	0.19	0.23	
					Bottom edge	1RB Mid	0.79	0.46	0.55	19
						50RB Mid	0.83	0.46	0.56	
					Laptop	1RB Mid	0.95	0.40	0.50	
						50RB Mid	0.93	0.46	0.56	

B.5.3.4 5G NR 25 FDD

Band	Antenna	Modulation / BW	Channel Number	Freq (MHz)	Position	% RB Allocation	Scaling Factor (dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
NR25	Ant 5	QPSK / 20MHz	376500	1882.5	Back Face	1RB Mid	0.75	0.32	0.38	
						50RB Mid	0.62	0.33	0.38	
					Bottom edge	1RB Mid	0.75	0.63	0.75	20
						50RB Mid	0.62	0.64	0.74	
					Laptop	1RB Mid	0.23	0.45	0.47	
						50RB Mid	0.15	0.50	0.52	

B.5.3.5 5G NR 30 FDD

Band	Antenna	Modulation / BW	Channel Number	Freq (MHz)	Position	% RB Allocation	Scaling Factor (dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
NR 30	Ant 5	QPSK / 10MHz	462000	2310	Back Face	1RB Mid	0.86	0.13	0.15	
						50RB Mid	0.90	0.13	0.16	
					Bottom edge	1RB Mid	0.86	0.67	0.82	
						50RB Mid	0.90	0.69	0.85	21
					Laptop	100RB Low	0.96	0.66	0.82	
						1RB Mid	0.15	0.43	0.45	
50RB Mid	0.24	0.48	0.50							

B.5.3.6 5G NR 38 TDD

Band	Antenna	Modulation / BW	Channel Number	Freq (MHz)	Position	% RB Allocation	Scaling Factor (dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
NR38	Ant 5	QPSK / 40MHz	519000	2595	Back Face	1RB Mid	0.72	0.28	0.33	
						50RB Mid	0.64	0.28	0.32	
					Right edge	1RB Mid	0.72	0.07	0.08	
						50RB Mid	0.64	0.07	0.08	
					Bottom edge	1RB Mid	0.72	0.37	0.44	
						50RB Mid	0.64	0.73	0.84	22
					Laptop	100RB Low	0.61	0.70	0.81	
						1RB Mid	0.52	0.39	0.44	
50RB Mid	0.51	0.44	0.49							

B.5.3.7 5G NR 41 TDD

Band	Antenna	Modulation / BW	Channel Number	Freq (MHz)	Position	% RB Allocation	Scaling Factor (dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
NR41	Ant 5	QPSK / 100MHz	518601	2593	Back Face	1RB Mid	0.66	0.11	0.13	
						50RB Mid	0.31	0.13	0.13	
					Bottom edge	1RB Mid	0.66	0.11	0.13	
						50RB Mid	0.31	0.25	0.26	
					Laptop	1RB Mid	0.46	0.69	0.76	
						50RB Mid	0.16	0.80	0.83	23
	100RB low	0.25	0.78	0.83						
	Ant 8	QPSK / 100MHz	518601	2593	Back Face	1RB Mid	0.64	0.60	0.69	
						50RB Mid	0.47	0.61	0.68	
					Left edge	1RB Mid	0.64	0.71	0.82	
						50RB Mid	0.47	0.73	0.82	
						100RB low	0.73	0.66	0.78	
					Laptop	1RB Mid	0.40	0.31	0.34	
	50RB Mid	0.23	0.16	0.17						

B.5.3.8 5G NR 66 FDD

Band	Antenna	Modulation / BW	Channel Number	Freq (MHz)	Position	% RB Allocation	Scaling Factor (dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
NR 66	Ant 5	QPSK / 40MHz	349000	1745	Back Face	1RB Mid	0.17	0.30	0.31	
						50RB Mid	0.18	0.30	0.31	
					Bottom edge	1RB Mid	0.17	0.68	0.71	
						50RB Mid	0.18	0.67	0.70	
					Laptop	1RB Mid	0.40	0.81	0.89	
						50RB Mid	0.58	0.82	1.05	
	100RB Mid	0.80	0.89	1.07		24				
	Ant 8	QPSK / 40MHz	349000	1745	Back Face	1RB Mid	0.00	0.39	0.39	
						50RB Mid	0.04	0.39	0.39	
					Laptop	1RB Mid	0.40	0.84	0.92	
						50RB Mid	0.47	0.84	0.94	
						100RB Mid	0.80	0.81	0.98	
					Left edge	1RB Mid	0.00	0.88	0.88	
	50RB Mid	0.04	0.88	0.89						
						100RB Low	0.35	0.79	0.86	

B.5.3.9 5G NR 71 FDD

Band	Antenna	Mod. / BW	Channel Number	Freq (MHz)	Position	% RB Allocation	Scaling Factor (dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
NR71	Ant 5	QPSK / 20MHz	136100	680.5	Bottom edge	1RB Mid	0.84	0.81	0.98	25
						50RB Mid	0.75	0.79	0.94	
						100RB Low	0.80	0.76	0.91	
					Right edge	1RB Mid	0.84	0.03	0.04	
						50RB Mid	0.75	0.04	0.05	
					Back Face	1RB Mid	0.84	0.16	0.19	
						50RB Mid	0.75	0.16	0.19	
					Laptop	1RB Mid	0.84	0.14	0.17	
						50RB Mid	0.75	0.17	0.20	

B.5.3.10 5G NR 77 TDD

Band	Antenna	Modulation / BW	Channel Number	Freq (MHz)	Position	% RB Allocation	Scaling Factor (dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
NR77	Ant 5	QPSK / 100MHz	650000	3750.0	Back Face	1RB Mid	0.12	0.17	0.17	
						50RB Mid	0.10	0.17	0.17	
					Bottom edge	1RB Mid	0.12	0.98	1.01	
						50RB Mid	0.10	1.00	1.02	
						100RB Low	0.26	1.00	1.06	26
					Laptop	1RB Mid	0.10	0.13	0.13	
						50RB Mid	0.05	0.13	0.13	
	Ant 8	QPSK / 100MHz	650000	3750.0	Back Face	1RB Mid	0.41	0.27	0.30	
						50RB Mid	0.31	0.28	0.30	
					Left edge	1RB Mid	0.41	0.82	0.90	
						50RB Mid	0.31	0.84	0.90	
						100RB Low	0.53	0.80	0.90	
					Laptop	1RB Mid	0.14	0.28	0.29	
						50RB Mid	0.06	0.30	0.30	

B.5.3.11 5G NR 78 TDD

Band	Antenna	Modulation / BW	Channel Number	Freq (MHz)	Position	% RB Allocation	Scaling Factor (dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
NR78	Ant 5	QPSK / 100MHz	650000	3750	Laptop	1RB Mid	0.16	0.22	0.22	
						50RB Mid	0.10	0.22	0.23	
	Ant 8	QPSK / 100MHz	650000	3750	Back Face	1RB Mid	0.28	0.30	0.31	
						50RB Mid	0.24	0.30	0.32	
					Left edge	1RB Mid	0.28	0.66	0.70	
						50RB Mid	0.24	0.68	0.71	27
					Laptop	1RB Mid	0.35	0.25	0.27	
						50RB Mid	0.30	0.25	0.27	

B.5.4 ENDC

For EN-DC mode, the 4G and 5G carriers transmit on separate antennas. Each exposure has been measured separately. For both LTE and 5G-NR, the highest standalone SAR conditions are added to derive the Total SAR. Refer to paragraph B.5.5

B.5.5 SAR Measurement Variability

According to FCC OET KDB 865664, SAR Measurement variability is assessed when the maximum initial measured SAR is ≥ 0.8 W/kg for a certain band/mode. If the measured SAR value of the initial repeated measurement is < 1.45 W/kg with $< 20\%$ variation, only one repeated measurement is required to confirm that the results are not expected to have substantial variations.

A second repeated measurement is required only if the measured results for the initial repeated measurement are within 10% of the SAR limit or vary by more than 20%.

A third repeated measurement is required only if the original, first or second repeated measurement ≥ 1.5 W/Kg and the ratio of largest to smallest SAR for the original, first and second repeated measurement is > 1.2 .

Band / Mode	Position	Ch #	Freq. (MHz)	Measured SAR 1g (W/kg)	1 st Repeated SAR 1g (W/kg)	2 nd Repeated SAR 1g (W/kg)	Highest Ratio
LTE FDD 17 / QPSK – 20MHz	Bottom edge	23790	710	0.93	0.93		1.00
WCDMA II /QPSK – 5MHz	Bottom edge	9538	1907.6	0.97	0.92		1.05
LTE FDD 66 / QPSK – 20MHz	Laptop	132572	1770	0.99	0.88		1.13
LTE TDD 38 / QPSK – 20MHz	Bottom edge	37850	2580	0.99	0.90		1.10
NR 77 / QPSK – 100MHz	Bottom edge	656000	3750	1.00	1.00		1.00

B.5.6 Simultaneous Transmission SAR Evaluation

According to FCC OET KDB 447498 D01, when the sum of 1g SAR for all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration.

As commented on section 3 and 6, this report only evaluates SAR for cellular transmission on the module, nevertheless in order to consider all possible simultaneous transmissions on the device for compliance, WLAN SAR values reported on document [1] are considered.

[1] 220316-03.TR03_FCC-IC_WLAN_SAR_HP HSN-I55C_AX211D2W

[2] 220316-03.TR06 - FCC_WiFi_6E_SAR_PD_HP HSN-I55C_AX211D2W WLAN-WWAN sku

All the values stated in the table below are the worst case found for standalone measurement with disregard of the transmission mode or channel where the worst case was found

Antenna	Position	Highest Reported SAR (1g) (W/kg)				
		WWAN	**WLAN 2.4GHz	**WLAN 5/6GHz	**Bluetooth	***NFC
Ant.5 WWAN	Back Face	0.66				
	Bottom Edge	1.14				
	Laptop	1.12				
	Left Edge	0.40*				
	Right Edge	0.11				
Ant.8 WWAN	Back Face	0.30				
	Bottom Edge	0.40*				
	Laptop	1.13				
	Left Edge	1.31				
	Right Edge	0.40*				
Main WLAN	Back Face		0.49	0.20		
	Bottom Edge		0.34	1.01		
	Laptop		0.51	1.02		
	Left Edge		0.40*	0.52		
	Right Edge		0.49	0.25		
Aux WLAN	Back Face		0.69	0.24	0.06	<0.01
	Bottom Edge		0.72	1.20	0.18	<0.01
	Laptop		0.74	1.16	0.05	<0.01
	Left Edge		1.18	0.38	0.07	<0.01
	Right Edge		0.40*	0.40*	0.40*	<0.01

*According to FCC OET KDB 447498 D01, when standalone test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated to 0.4 W/Kg for 1-g SAR when the test separation is > 50mm in order to determine simultaneous transmission test exclusion.

**Refer to these test reports for WLAN 2.4GHz, and 5/6 GHz.
 - 220316-03.TR03_FCC-IC_WLAN_SAR_HP HSN-I55C_AX211D2W
 - 220316-03.TR06 - FCC_WiFi_6E_SAR_PD_HP HSN-I55C_AX211D2W WLAN-WWAN sku

*** Refer to these test reports for NFC Wireless Charging Module.
 - Ultron_HSN-I55C_USA FCC SAR report_04262022

Position	Simultaneous Tx Antenna Combination						Σ SAR 1g (W/Kg)	Limit (W/kg)
	#	WWAN Ant5	WWAN Ant8	Main Antenna	Aux Antenna	NFC		
Back Face	1	Cellular	Cellular	WLAN 5/6GHz	WLAN 5/6GHz	WLC	1.40	1.6
	2	Cellular	Cellular	WLAN 5/6GHz	WLAN 5/6GHz+BT	WLC	1.46	
	3	Cellular	Cellular	WLAN 5/6GHz	BT	WLC	1.22	
	4	Cellular	Cellular	WLAN 2.4GHz	WLAN 2.4GHz	WLC	1.84	
	5	Cellular	Cellular	WLAN 2.4GHz	BT	WLC	1.51	
Bottom Edge	1	Cellular	Cellular	WLAN 5/6GHz	WLAN 5/6GHz	WLC	3.75	
	2	Cellular	Cellular	WLAN 5/6GHz	WLAN 5/6GHz+BT	WLC	3.93	
	3	Cellular	Cellular	WLAN 5/6GHz	BT	WLC	2.73	
	4	Cellular	Cellular	WLAN 2.4GHz	WLAN 2.4GHz	WLC	2.60	
	5	Cellular	Cellular	WLAN 2.4GHz	BT	WLC	2.06	
Laptop	1	Cellular	Cellular	WLAN 5/6GHz	WLAN 5/6GHz	WLC	4.43	
	2	Cellular	Cellular	WLAN 5/6GHz	WLAN 5/6GHz+BT	WLC	4.48	
	3	Cellular	Cellular	WLAN 5/6GHz	BT	WLC	3.32	
	4	Cellular	Cellular	WLAN 2.4GHz	WLAN 2.4GHz	WLC	3.50	
	5	Cellular	Cellular	WLAN 2.4GHz	BT	WLC	2.81	
Left Edge	1	Cellular	Cellular	WLAN 5/6GHz	WLAN 5/6GHz	WLC	2.61	
	2	Cellular	Cellular	WLAN 5/6GHz	WLAN 5/6GHz+BT	WLC	2.68	
	3	Cellular	Cellular	WLAN 5/6GHz	BT	WLC	2.30	
	4	Cellular	Cellular	WLAN 2.4GHz	WLAN 2.4GHz	WLC	3.29	
	5	Cellular	Cellular	WLAN 2.4GHz	BT	WLC	2.18	
Right Edge	1	Cellular	Cellular	WLAN 5/6GHz	WLAN 5/6GHz	WLC	1.16	
	2	Cellular	Cellular	WLAN 5/6GHz	WLAN 5/6GHz+BT	WLC	1.56	
	3	Cellular	Cellular	WLAN 5/6GHz	BT	WLC	1.16	
	4	Cellular	Cellular	WLAN 2.4GHz	WLAN 2.4GHz	WLC	1.40	
	5	Cellular	Cellular	WLAN 2.4GHz	BT	WLC	1.40	

In case the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR to peak location separation ratio (SPLSR). According to the last table possible simultaneous transmission combinations are identified for each position from 1 to 5, each combination will be analyzed by antenna pairs. Antenna pairs considered in one configuration won't be performed again in case they are repeated on the next simultaneous configuration:

Position	Ant. Pair case	Antenna	Reported SAR 1g (W/kg)	Σ SAR 1g (W/Kg)	Peak Location (mm) (x,y,z)	SAR to peak location separation ratio	Limit
Back Face	1a	WWAN (Ant5)	0.66	0.96			0.04
		WWAN (Ant8)	0.30				
	1b	WWAN (Ant5)	0.66	0.86			
		Main WLAN 5/6GHz	0.20				
	1c	WWAN (Ant5)	0.66	0.90			
		Aux WLAN 5/6GHz	0.24				
	1d	WWAN (Ant8)	0.30	0.50			
		Main WLAN 5/6GHz	0.20				
	1e	WWAN (Ant8)	0.30	0.54			
		Aux WLAN 5/6GHz	0.24				
	1f	Main WLAN 5GHz	0.20	0.44			
		Aux WLAN 5/6GHz	0.24				
	2a	WWAN (Ant5)	0.66	0.72			
		Aux BT	0.06				
	2b	WWAN (Ant8)	0.30	0.36			
		Aux BT	0.06				
	4a	WWAN (Ant5)	0.66	1.14			
		Main WLAN 2.4GHz	0.49				
	4b	WWAN (Ant5)	0.66	0.90			
		Aux WLAN 2.4GHz	0.24				
4c	WWAN (Ant8)	0.30	0.79				
	Main WLAN 2.4GHz	0.49					
4d	WWAN (Ant8)	0.30	0.99				
	Aux WLAN 2.4GHz	0.69					
4e	Main WLAN 2.4GHz	0.49	1.18				
	Aux WLAN1 2.4GHz	0.69					

Position	Ant. Pair case	Antenna	Reported SAR 1g (W/kg)	Σ SAR 1g (W/Kg)	Peak Location (mm) (x,y,z)	SAR to peak location separation ratio	Limit
Bottom Edge	1a	WWAN (Ant5)	1.14	1.54			0.04
		WWAN (Ant8)	0.40				
	1b	WWAN (Ant5)	1.14	2.15	(-10.6 ; 44.2 ; -177)	0.04	
		Main WLAN 5/6GHz	1.01		(-0.3 ; 122 ; -177)		
	1c	WWAN (Ant5)	1.14	2.34	(-10.6 ; 44.2 ; -177)	0.02	
		Aux WLAN 5/6GHz	1.20		(3.1 ; -132.6 ; -177)		
	1d	WWAN (Ant8)	0.40	1.41			
		Main WLAN 5/6GHz	1.01				
	1e	WWAN (Ant8)	0.33	1.53			
		Aux WLAN 5/6GHz	1.20				
	1f	Main WLAN 5GHz	1.01	2.21	(-0.3 ; 122 ; -177)	0.01	
		Aux WLAN 5/6GHz	1.20		(3.1 ; -132.6 ; -177)		
	2a	WWAN (Ant5)	1.14	1.32			
		Aux BT	0.18				
	2b	WWAN (Ant8)	0.40	0.58			
		Aux BT	0.18				
	4a	WWAN (Ant5)	1.14	1.48			
		Main WLAN 2.4GHz	0.34				
	4b	WWAN (Ant5)	1.14	1.86	(-10.6 ; 44.2 ; -177)	0.01	
		Aux WLAN 2.4GHz	0.72		(8.5,-130, -177)		
4c	WWAN (Ant8)	0.40	0.74				
	Main WLAN 2.4GHz	0.34					
4d	WWAN (Ant8)	0.40	1.12				
	Aux WLAN 2.4GHz	0.72					
4e	Main WLAN 2.4GHz	0.34	1.06				
	Aux WLAN1 2.4GHz	0.72					

Position	Ant. Pair case	Antenna	Reported SAR 1g (W/kg)	Σ SAR 1g (W/Kg)	Peak Location (mm) (x,y,z)	SAR to peak location separation ratio	Limit
Laptop	1a	WWAN (Ant5)	1.12	2.25	(-0.4 ; -37 ; -177)	0.02	0.04
		WWAN (Ant8)	1.13		(-78,137,-177)		
	1b	WWAN (Ant5)	1.12	2.14	(-0.4 ; -37 ; -177)	0.04	
		Main WLAN 5/6GHz	1.02		(-9.3 ; -125.6 ; -177)		
	1c	WWAN (Ant5)	1.12	2.28	(-0.4 ; -37 ; -177)	0.02	
		Aux WLAN 5/6GHz	1.16		(-9.3 ; 128.3 ; -177)		
	1d	WWAN (Ant8)	1.13	2.15	(-78,137,-177)	0.01	
		Main WLAN 5/6GHz	1.02		(-9.3 ; -125.6 ; -177)		
	1e	WWAN (Ant8)	1.13	2.29	(-78,137,-177)	0.04	
		Aux WLAN 5/6GHz	1.16		(-9.3 ; 128.3 ; -177)		
	1f	Main WLAN 5GHz	1.02	2.18	(-9.3 ; -125.6 ; -177)	0.01	
		Aux WLAN 5/6GHz	1.16		(-9.3 ; 128.3 ; -177)		
	2a	WWAN (Ant5)	1.12	1.17			
		Aux WLAN BT	0.05				
	2b	WWAN (Ant8)	1.13	1.18			
		Aux WLAN1 BT	0.05				
	4a	WWAN (Ant5)	1.12	1.63	(-0.4 ; -37 ; -177)	0.03	
		Main WLAN 2.4GHz	0.51		(-1.7 ; -111.8 ; -177)		
	4b	WWAN (Ant5)	1.12	1.86	(-0.4 ; -37 ; -177)	0.02	
		Aux WLAN 2.4GHz	0.74		(-6 ; 126 ; -177)		
4c	WWAN (Ant8)	1.13	1.64	(-78,137,-177)	0.03		
	Main WLAN 2.4GHz	0.51		(-1.7 ; -111.8 ; -177)			
4d	WWAN (Ant8)	1.13	1.87	(-78,137,-177)	0.02		
	Aux WLAN 2.4GHz	0.74		(-6 ; 126 ; -177)			
4e	Main WLAN 2.4GHz	0.51	1.25				
	Aux WLAN1 2.4GHz	0.74					

Position	Ant. Pair case	Antenna	Reported SAR 1g (W/kg)	Σ SAR 1g (W/Kg)	Peak Location (mm) (x,y,z)	SAR to peak location separation ratio	Limit
Left Edge	1a	WWAN (Ant5)	0.40	1.71			0.04
		WWAN (Ant8)	1.31				
	1b	WWAN (Ant5)	0.40	0.92			
		Main WLAN 5/6GHz	0.52				
	1c	WWAN (Ant5)	0.40	0.80			
		Aux WLAN 5/6GHz	0.40				
	1d	WWAN (Ant8)	1.31	1.83			
		Main WLAN 5/6GHz	0.52				
	1e	WWAN (Ant8)	1.31	1.69	(-6.7,-57.8,-177)	0.01	
		Aux WLAN 5/6GHz	0.40		(-0.8,-227,-177)		
	1f	Main WLAN 5GHz	0.52	0.90			
		Aux WLAN 5/6GHz	0.38*				
	2a	WWAN (Ant5)	0.40	0.47			
		Aux WLAN BT	0.07				
	2b	WWAN (Ant8)	1.31	1.38			
		Aux WLAN1 BT	0.07				
	4a	WWAN (Ant5)	0.40	0.80			
		Main WLAN 2.4GHz	0.40				
	4b	WWAN (Ant5)	0.40	1.14			
		Aux WLAN 2.4GHz	0.74				
4c	WWAN (Ant8)	1.31	1.41				
	Main WLAN 2.4GHz	0.10*					
4d	WWAN (Ant8)	1.31	2.49				
	Aux WLAN 2.4GHz	1.18					
4e	Main WLAN 2.4GHz	0.40	1.58				
	Aux WLAN1 2.4GHz	1.18					

*According to FCC OET KDB 447498 D01, when standalone test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated to 0.4 W/Kg for 1-g SAR when the test separation is > 50mm in order to determine simultaneous transmission test exclusion.

When an antenna qualifies for the standalone SAR test exclusion of 4.3.1 and also transmits simultaneously with other antennas, the standalone SAR value must be estimated according to the following to determine the simultaneous transmission SAR test exclusion criteria: $36 \cdot 1 \cdot [(max. \text{ power of channel, including tune-up tolerance, mW}) / (min. \text{ test separation distance, mm})] \cdot [\sqrt{f(GHz)/x}] \text{ W/kg}$, for test separation distances $\leq 50 \text{ mm}$; where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR. 2) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distance is > 50 mm.37

Position	Ant. Pair case	Antenna	Reported SAR 1g (W/kg)	Σ SAR 1g (W/Kg)	Peak Location (mm) (x,y,z)	SAR to peak location separation ratio	Limit
Right Edge	1a	WWAN (Ant5)	0.11	0.51			0.04
		WWAN (Ant8)	0.40				
	1b	WWAN (Ant5)	0.11	0.36			
		Main WLAN 5/6GHz	0.25				
	1c	WWAN (Ant5)	0.11	0.51			
		Aux WLAN 5/6GHz	0.40				
	1d	WWAN (Ant8)	0.40	0.65			
		Main WLAN 5/6GHz	0.25				
	1e	WWAN (Ant8)	0.40	0.80			
		Aux WLAN 5/6GHz	0.40				
	1f	Main WLAN 5GHz	0.25	0.65			
		Aux WLAN 5/6GHz	0.40				
	2a	WWAN (Ant5)	0.11	0.51			
		Aux WLAN BT	0.40				
	2b	WWAN (Ant8)	0.40	0.80			
		Aux WLAN1 BT	0.40				
	4a	WWAN (Ant5)	0.11	0.60			
		Main WLAN 2.4GHz	0.49				
	4b	WWAN (Ant5)	0.11	0.51			
		Aux WLAN 2.4GHz	0.40				
4c	WWAN (Ant8)	0.40	0.89				
	Main WLAN 2.4GHz	0.49					
4d	WWAN (Ant8)	0.40	0.80				
	Aux WLAN 2.4GHz	0.40					
4e	Main WLAN 2.4GHz	0.49	0.89				
	Aux WLAN1 2.4GHz	0.40					

Considering the results described above and according to the simultaneous transmission evaluation exclusions described in FCC OET KDB 447498 D01, no SPLSR nor enlarged zoom scan measurements are required.

Annex C. Test System Plots

1. WCDMA II, RMC 12.2kbps, 5MHz, CH9400, Ant 5, Bottom Edge.....	162
2. WCDMA IV, RMC 12.2kbps, 5MHz, CH1762, Ant 5, Bottom Edge	163
3. WCDMA V, RMC 12.2kbps, 5MHz, CH4183, Ant 5, Bottom Edge	164
4. LTE Band 5, QPSK - 10MHz, CH20525, Ant 5, Bottom Edge	165
5. LTE Band 7, QPSK - 20MHz, CH20850, Ant 8, Left Edge	166
6. LTE Band 12, QPSK - 10MHz, CH23095, Ant 5, Bottom Edge	167
7. LTE Band 13, QPSK - 10MHz, CH23230, Ant 5, Bottom Edge	168
8. LTE Band 14, QPSK - 10MHz, CH23330, Ant 5, Bottom Edge	169
9. LTE Band 17, QPSK - 10MHz, CH23790 Ant 5, Bottom Edge	170
10. LTE Band 25, QPSK - 20MHz, CH26590 Ant 8, Left Edge.....	171
11. LTE Band 26, QPSK - 15MHz, CH26865, Ant 5, Bottom Edge.....	172
12. LTE Band 30 - 10MHz, CH27710, Ant 5, Bottom Edge	173
13. LTE Band 38, QPSK - 20MHz, CH38000, Ant 5, Laptop	174
14. LTE Band 41, QPSK - 20MHz, CH40620, Ant 8, Left edge	175
15. LTE Band 48, QPSK - 20MHz, CH55990, Ant 8, Left Edge.....	176
16. LTE Band 66, QPSK - 20MHz, CH132572, Ant 5, Laptop	177
17. LTE Band 71, QPSK - 20MHz, CH133297, Ant 5, Bottom Edge.....	178
18. 5G NR FR1 Band 2, QPSK – 20MHz, CH372000, Ant 8 – Left Edge.....	179
19. 5G NR FR1 Band 5, QPSK – 20MHz, CH167300, Ant 5 – Bottom Edge.....	180
20. 5G NR FR1 Band 7, QPSK – 20MHz, CH507000, Ant 5 – Bottom Edge.....	181
21. 5G NR FR1 Band 25, QPSK – 20MHz, CH376500, Ant 5 – Bottom Edge.....	182
22. 5G NR FR1 Band 30, QPSK – 10MHz, CH462000, Ant 5 – Bottom Edge.....	183
23. 5G NR FR1 Band 38, QPSK – 40MHz, CH519000, Ant 5 – Bottom Edge.....	184
24. 5G NR FR1 Band 41, QPSK – 100MHz, CH518601, Ant 5 – Laptop	185
25. 5G NR FR1 Band 66, QPSK – 40MHz, CH349000, Ant 5 – Laptop	186
26. 5G NR FR1 Band 71, QPSK – 20MHz, CH136100, Ant 5 – Bottom Edge.....	187
27. 5G NR FR1 Band 77, QPSK – 100MHz, CH650000, Ant 5 – Bottom Edge.....	188
28. 5G NR FR1 Band 78, QPSK – 100MHz, CH650000, Ant 8 – Left Edge.....	189
29. System Check Body Liquid 750MHz – 2022-04-21 – System2.....	190
30. System Check Body Liquid 750MHz – 2022-06-14 – System 2.....	191
31. System Check Body Liquid 750MHz – 2022-06-13 – System 4.....	192
32. System Check Body Liquid 835MHz – 2022-04-21 – System 2.....	193
33. System Check Body Liquid 835MHz – 2022-05-31 – System 2.....	194
34. System Check Body Liquid 835MHz – 2022-05-17 – System 4.....	195
35. System Check Body Liquid 1750MHz – 2022-05-26 – System 2.....	196
36. System Check Body Liquid 1750MHz – 2022-12-05 – System 4.....	197
37. System Check Body Liquid 1900MHz – 2022-04-22 – System 2.....	198
38. System Check Body Liquid 1900MHz – 2022-04-28 – System 2.....	199
39. System Check Body Liquid 1900MHz – 2022-17-05 – System 4.....	200

40.	System Check Body Liquid 1900MHz – 2022-19-05 – System 4.....	201
41.	System Check Body Liquid 2300MHz – System 2	202
42.	System Check Body Liquid 2300MHz – 2022-17-05 – System 4.....	203
43.	System Check Body Liquid 2600MHz – 2022-04-21 – System 2.....	204
44.	System Check Body Liquid 2600MHz – 2022-06-01 – System 2.....	205
45.	System Check Body Liquid 2600MHz – 2022-17-05 – System 4.....	206
46.	System Check Body Liquid 2600MHz – 2022-19-05 – System 4.....	207
47.	System Check Body Liquid 3700MHz – 2022-06-14 - System2.....	208
48.	System Check Body Liquid 3700MHz – 2022-17-05 – System 4.....	209
49.	System Check Body Liquid 3700MHz – 2022-19-05 – System 4.....	210

1. WCDMA II, RMC 12.2kbps, 5MHz, CH9400, Ant 5, Bottom Edge

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I55C	235.0 x 295.0 x 20.0	00027705HB	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE, BOTTOM, 0.00	Band2, UTRA/FDD	WCDMA, 10011-CAB	1880.0, 9400	7.98	1.48	52.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2022-Apr-25	EX3DV4 - SN7604, 2021-08-16	DAE4 Sn1703, 2022-04-28

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 330.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-04-27, 16:21	2022-04-27, 16:27
psSAR1g [W/kg]	0.933	0.977
psSAR10g [W/kg]	0.441	0.455
Power Drift [dB]	-0.03	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		78.1
Dist 3dB Peak [mm]		7.2

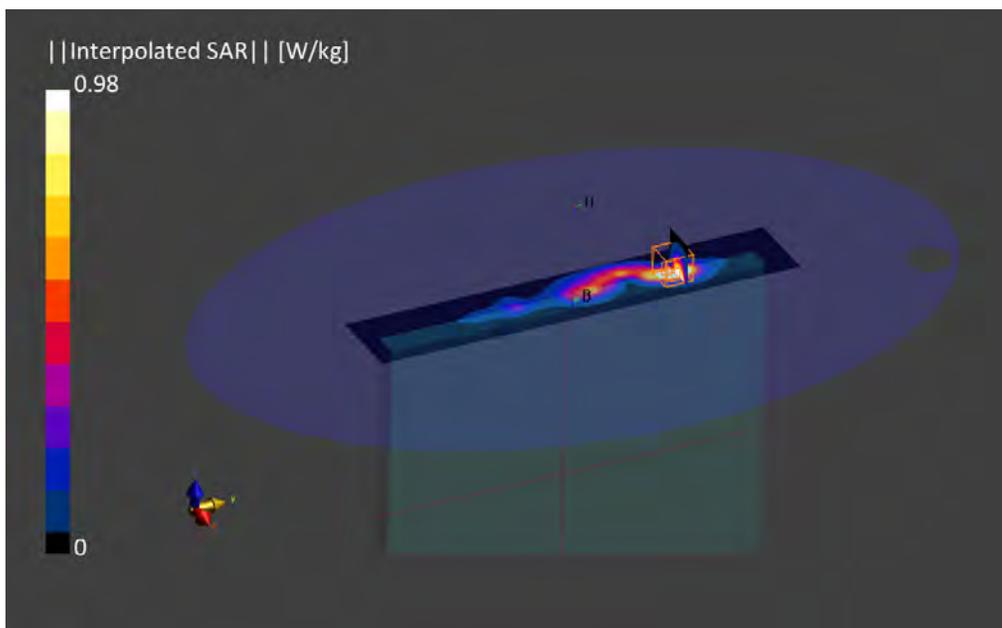

2. WCDMA IV, RMC 12.2kbps, 5MHz, CH1762, Ant 5, Bottom Edge

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I55C	235.0 x 295.0 x 20.0	00027705HB	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE BOTTOM, 0.00	Band 4, UTRA/FDD	WCDMA, 10011-CAB	1732.5, 1762	8.37	1.37	51.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000 ,2022-Apr-25	EX3DV4 - SN7604, 2021-08-16	DAE4 Sn1703, 2022-04-28

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 330.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	5.1 x 5.1 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-04-26, 15:53	2022-04-26, 16:01
psSAR1g [W/kg]	0.546	0.790
psSAR10g [W/kg]	0.292	0.383
Power Drift [dB]	0.04	0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		81.5
Dist 3dB Peak [mm]		7.3

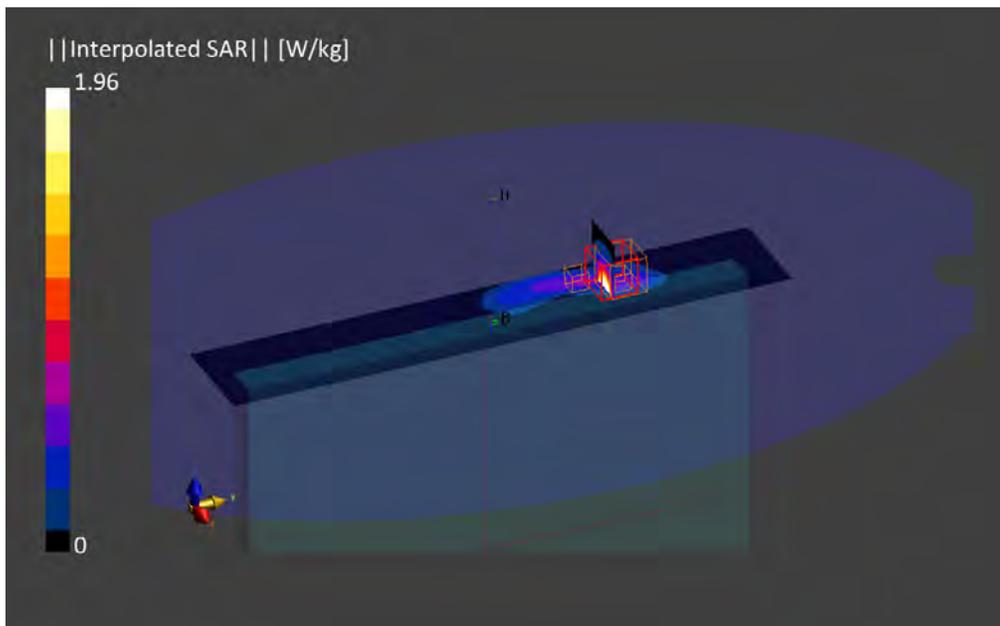

3. WCDMA V, RMC 12.2kbps, 5MHz, CH4183, Ant 5, Bottom Edge

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I55C	235.0 x 295.0 x 20.0	00027705HB	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE BOTTOM, 0.00	Band 5, UTRA/FDD	WCDMA, 10011-CAB	836.6, 4183	9.34	0.97	55.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MBBL-600-6000 ,2022-May-30	EX3DV4 - SN7604, 2021-08-16	DAE4 Sn1703, 2022-04-28

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 330.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	5.9 x 5.9 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-05-31, 11:00	2022-05-31, 11:08
psSAR1g [W/kg]	0.246	0.277
psSAR10g [W/kg]	0.153	0.133
Power Drift [dB]	-0.02	0.01
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		69.3
Dist 3dB Peak [mm]		6.0

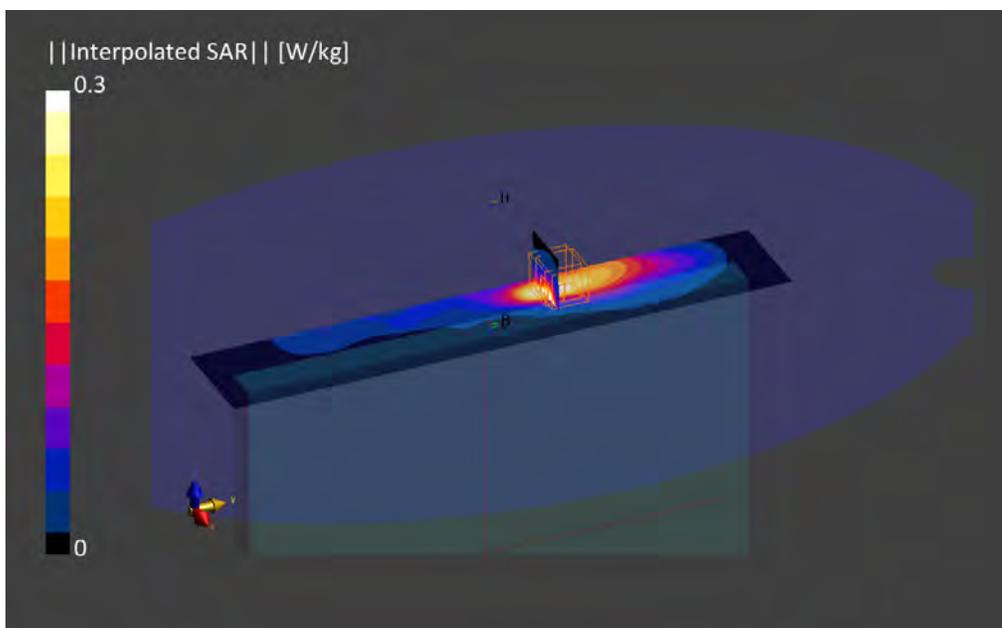

4. LTE Band 5, QPSK - 10MHz, CH20525, Ant 5, Bottom Edge

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	235.0 x 295.0 x 20.0		Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE BOTTOM, 0.00	Band 5, E-UTRA/FDD	LTE-FDD, 10175-CAG	836.5, 20525	9.34	0.97	55.4

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2022-May-30	EX3DV4 - SN7604, 2021-08-16	DAE4 Sn1703, 2022-04-28

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 330.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-05-31, 12:34	2022-05-31, 12:40
psSAR1g [W/Kg]	0.349	0.379
psSAR10g [W/Kg]	0.216	0.185
Power Drift [dB]	0.01	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		64.7
Dist 3dB Peak [mm]		7.2

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		Peak 10g averaged SAR on boundary.
Error(s)		

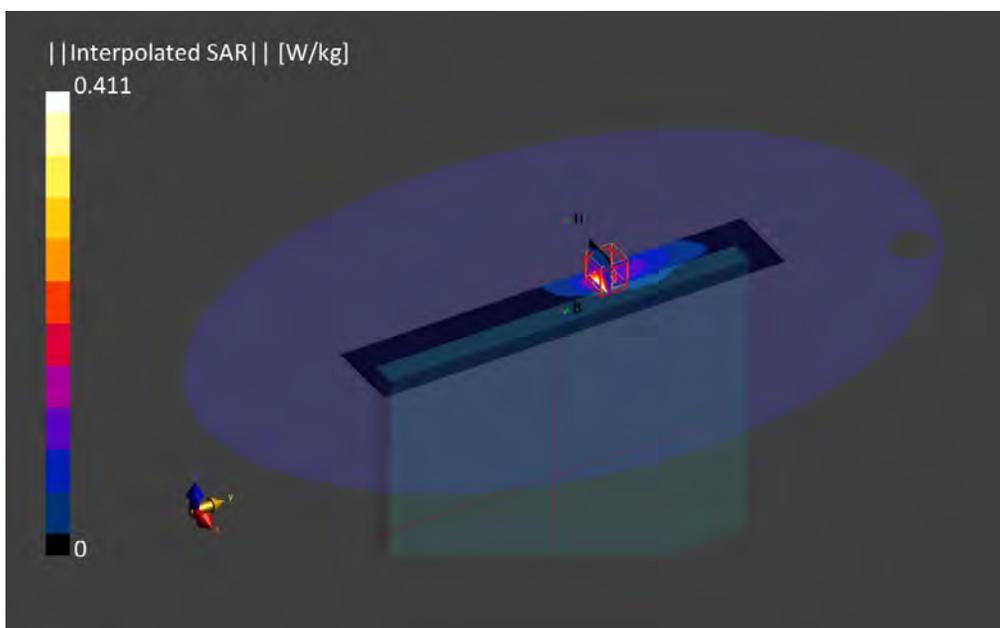

5. LTE Band 7, QPSK - 20MHz, CH20850, Ant 8, Left Edge

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I55C	235.0 x 295.0 x 20.0	00027705HB	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE LEFT, 0.00	Band 7, E-UTRA/FDD	LTE-FDD, 10169-CAE	2510.0, 20850	7.57	2.05	53.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000,2022-May-30	EX3DV4 - SN7604, 2021-08-16	DAE4 Sn1703, 2022-04-28

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 280.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	4.5 x 4.5 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-06-01, 14:38	2022-06-01, 14:48
psSAR1g [W/kg]	0.964	0.975
psSAR10g [W/kg]	0.345	0.346
Power Drift [dB]	0.02	-0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		70.9
Dist 3dB Peak [mm]		7.0

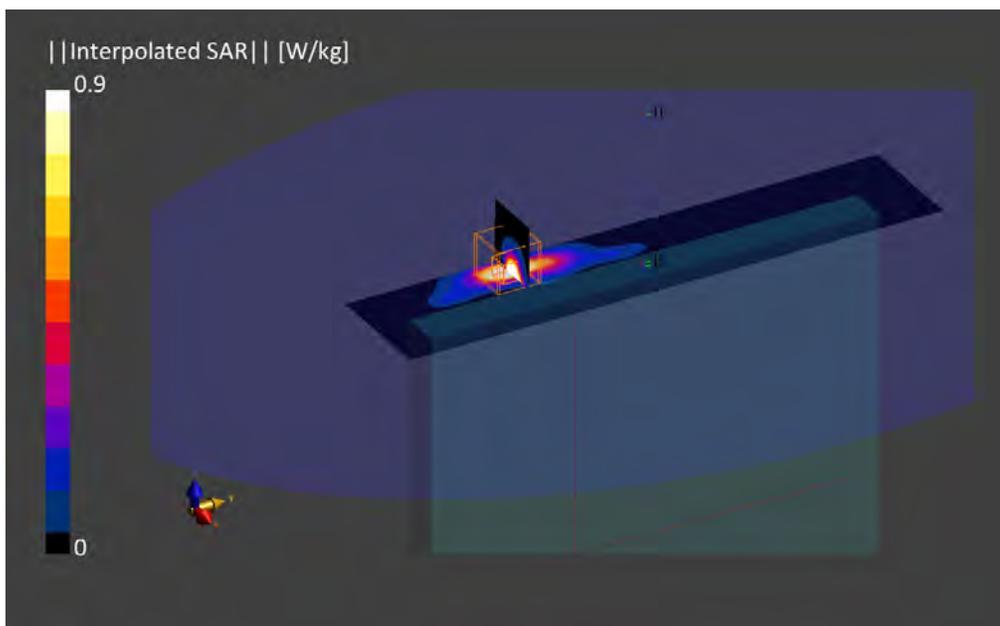

6. LTE Band 12, QPSK - 10MHz, CH23095, Ant 5, Bottom Edge

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I55C	235.0 x 295.0 x 20.0	00027705HB	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE BOTTOM, 0.00	Band 12, E-UTRA/FDD	LTE-FDD, 10175-CAG	707.5, 23095	9.63	0.90	53.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2022-Apr-20	EX3DV4 - SN7604, 2021-08-16	DAE4 Sn1703, 2022-04-28

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	4.9 x 4.9 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-04-21, 16:18	2022-04-21, 16:28
psSAR1g [W/kg]	0.450	0.603
psSAR10g [W/kg]	0.282	0.257
Power Drift [dB]	-0.02	0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		80.0
Dist 3dB Peak [mm]		10.8

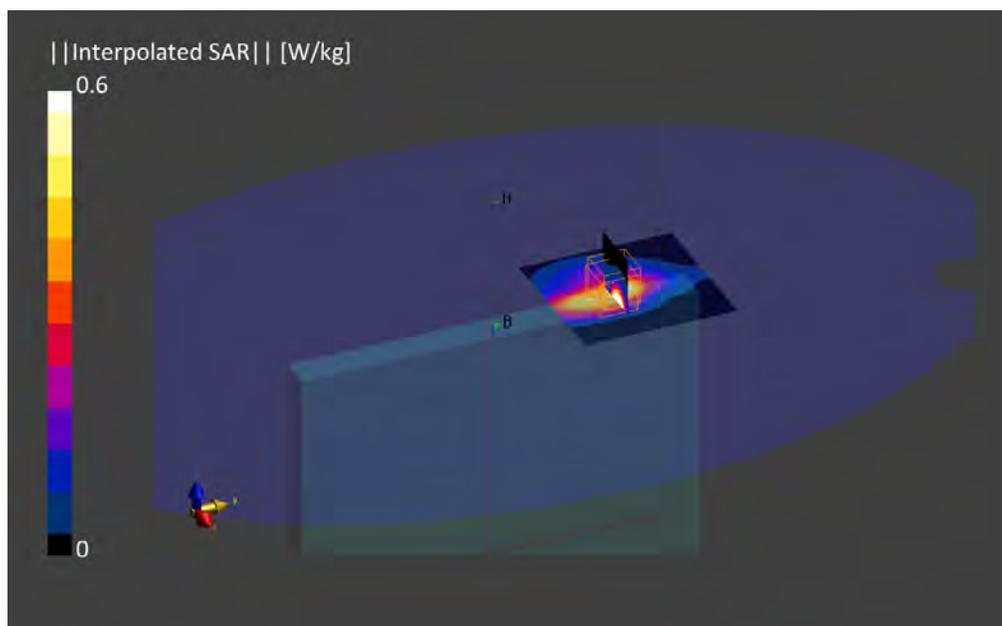

7. LTE Band 13, QPSK - 10MHz, CH23230, Ant 5, Bottom Edge

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I55C	235.0 x 295.0 x 20.0	00027705HB	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE BOTTOM, 0.00	Band 13, E-UTRA/FDD	LTE-FDD, 10175-CAG	782.0, 23230	9.63	0.92	53.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MBBL-600-6000 , 2022-Apr-20	EX3DV4 - SN7604, 2021-08-16	DAE4 Sn1703, 2022-04-28

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 150.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-04-21, 18:03	2022-04-21, 18:09
psSAR1g [W/kg]	0.458	0.531
psSAR10g [W/kg]	0.289	0.269
Power Drift [dB]	-0.09	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		82.9
Dist 3dB Peak [mm]		14.4

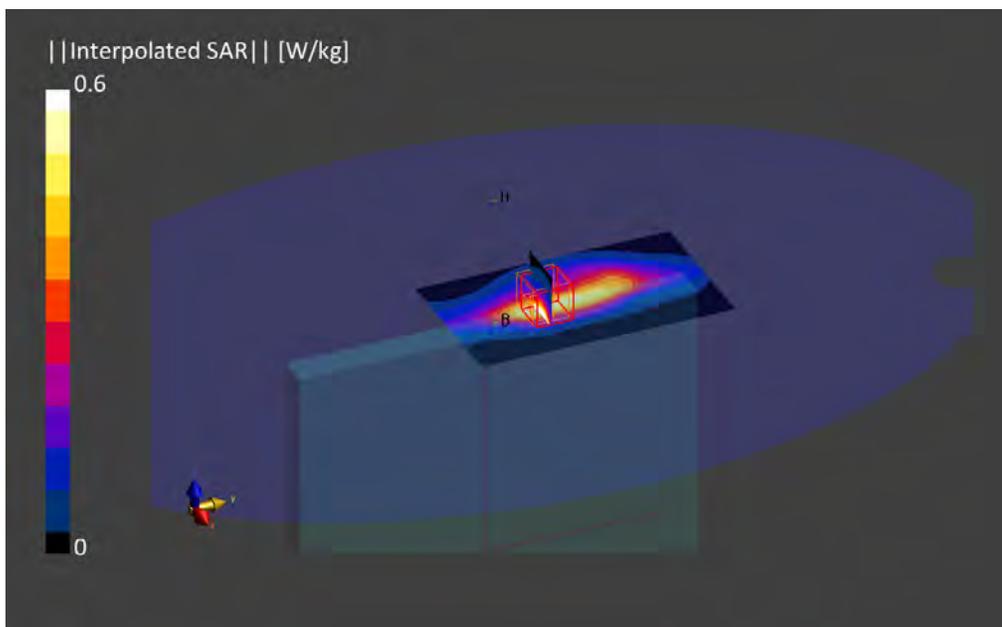

8. LTE Band 14, QPSK - 10MHz, CH23330, Ant 5, Bottom Edge

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I55C	235.0 x 295.0 x 20.0	00027705HB	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE, BOTTOM, 0.00	Band 14, E-UTRA/FDD	LTE-FDD, 10175-CAG	793.0, 23330	9.63	0.92	53.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000 , 2022-Apr-20	EX3DV4 - SN7604, 2021-08-16	DAE4 Sn1703, 2022-04-28

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 150.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-04-21, 18:22	2022-04-21, 18:28
psSAR1g [W/kg]	0.470	0.524
psSAR10g [W/kg]	0.296	0.271
Power Drift [dB]	0.05	-0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		76.1
Dist 3dB Peak [mm]		7.6

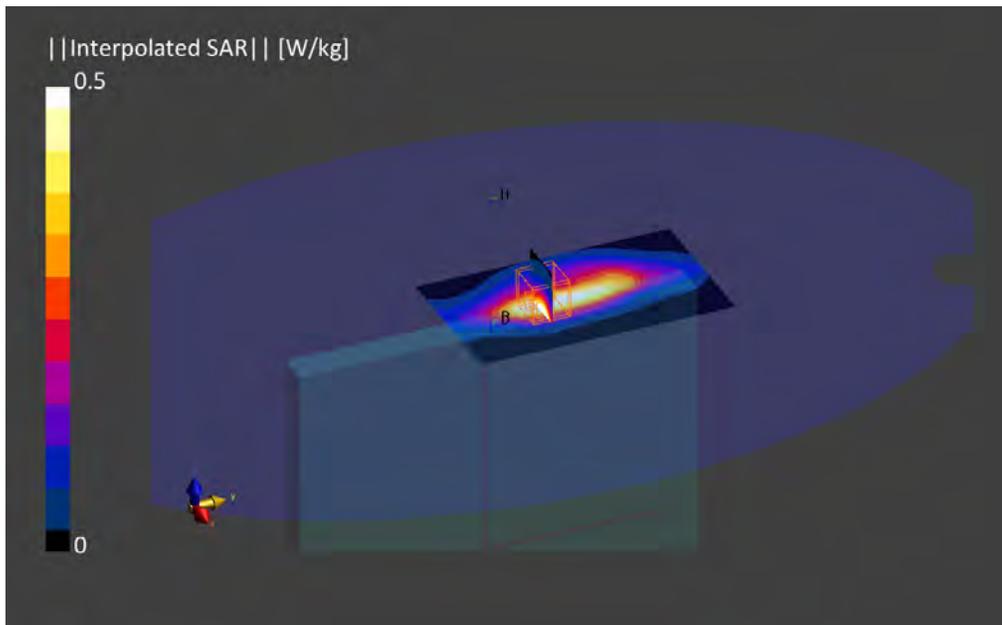

9. LTE Band 17, QPSK - 10MHz, CH23790 Ant 5, Bottom Edge

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE BOTTOM, 0.00	Band 17, E-UTRA/FDD	LTE-FDD, 10175-CAG	710.0, 23790	9.69	0.90	52.7

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MBBL-600-6000 , 2022-Jun-14	EX3DV4 - SN7604, 2021-08-16	DAE4 Sn1703, 2022-04-28

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 330.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	4.9 x 4.9 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-06-14, 15:30	2022-06-14, 15:40
psSAR1g [W/Kg]	0.626	0.927
psSAR10g [W/Kg]	0.412	0.412
Power Drift [dB]	0.02	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		68.0
Dist 3dB Peak [mm]		5.9

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

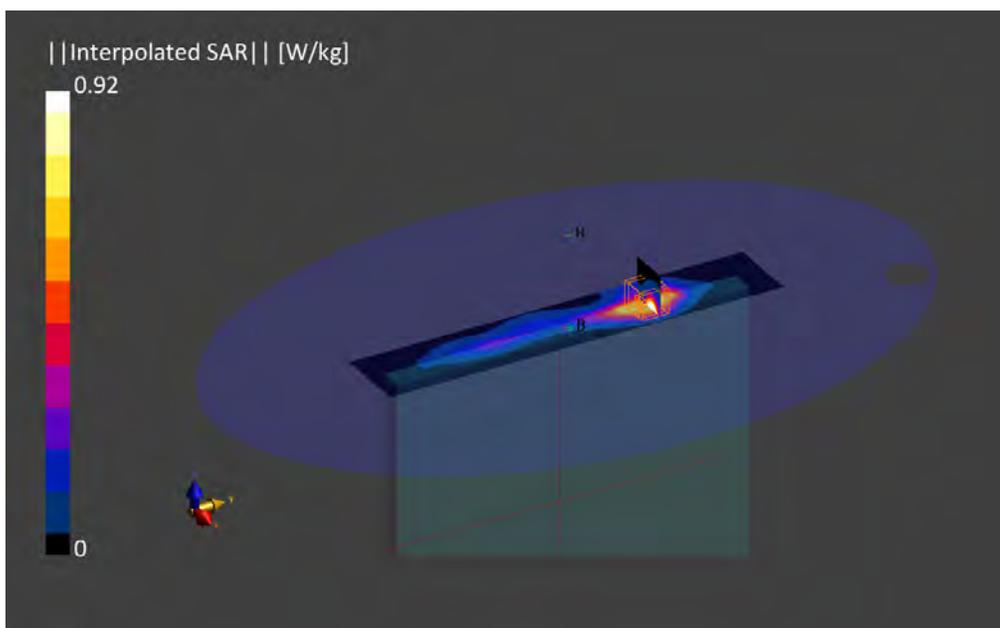

10. LTE Band 25, QPSK - 20MHz, CH26590 Ant 8, Left Edge

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I55C	235.0 x 295.0 x 20.0	00027705HB	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE LEFT, 0.00	Band 25, E-UTRA/FDD	LTE-FDD, 10169-CAE	1905.0, 26590	8.62	1.46	52.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MBBL-600-6000 2022-Apr-20	EX3DV4 - SN7604, 2021-08-16	DAE4 Sn1703, 2022-04-28

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 270.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	4.4 x 4.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-04-22, 09:13	2022-04-22, 09:57
psSAR1g [W/kg]	1.03	1.11
psSAR10g [W/kg]	0.457	0.434
Power Drift [dB]	0.03	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction [dB]	Positive Only	Positive Only
M2/M1 [%]		69.1
Dist 3dB Peak [mm]		4.5

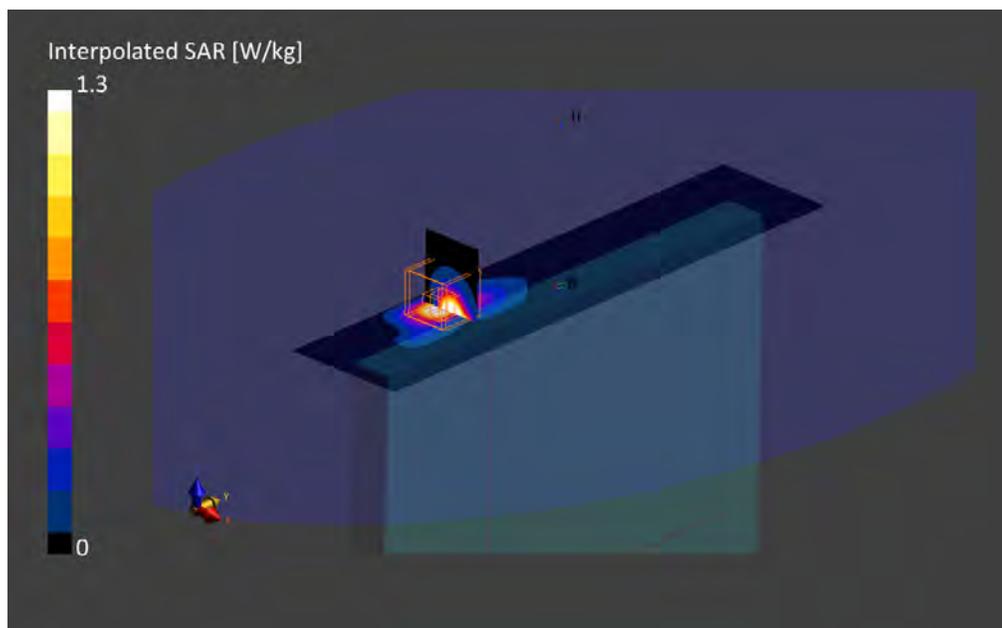

11. LTE Band 26, QPSK - 15MHz, CH26865, Ant 5, Bottom Edge

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I55C	235.0 x 295.0 x 20.0	00027705HB	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE, BOTTOM, 0.00	Band 26 E-UTRA/FDD	LTE-FDD, 10160-CAE	831.5, 26865	9.32	0.94	53.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MBBL-600-6000 2022-Apr-20	EX3DV4 - SN7604, 2021-08-16	DAE4 Sn1703, 2022-04-28

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 150.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-04-21, 18:51	2022-04-21, 18:57
psSAR1g [W/kg]	0.414	0.449
psSAR10g [W/kg]	0.255	0.230
Power Drift [dB]	-0.02	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		85.7
Dist 3dB Peak [mm]		11.3

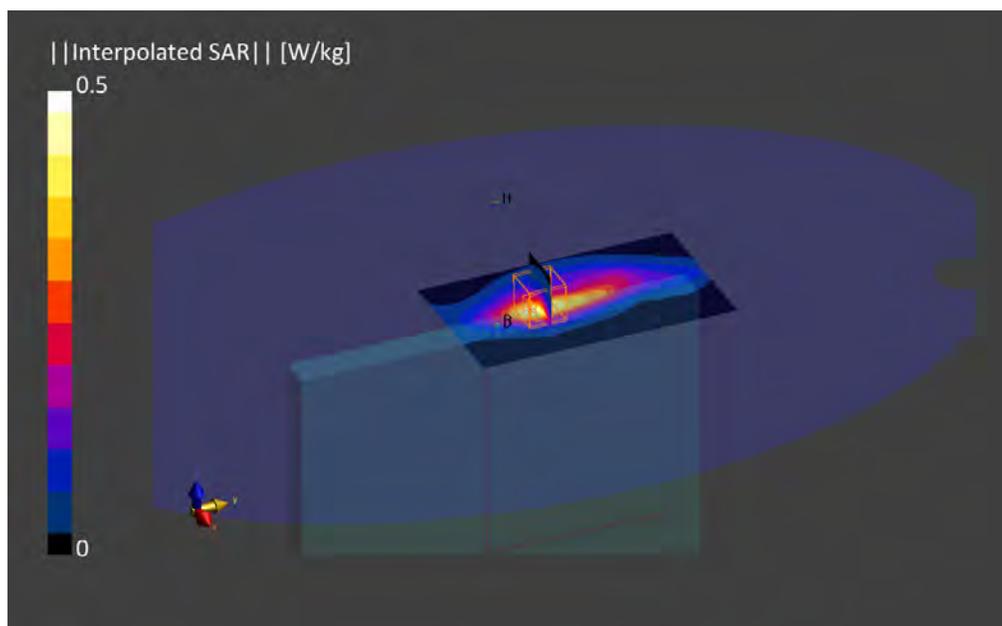

12. LTE Band 30 - 10MHz, CH27710, Ant 5, Bottom Edge

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I55C	235.0 x 295.0 x 20.0	00027705HB	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE BOTTOM, 0.00	Band 30, E-UTRA/FDD	LTE-FDD, 10175-CAG	2310.0, 27710	7.45	1.81	51.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MBBL-600-6000, 2022-Apr-20	EX3DV4 - SN7604, 2021-08-16	DAE4 Sn1703, 2022-04-28

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 160.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	4.9 x 4.9 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-04-21, 19:03	2022-04-21, 19:12
psSAR1g [W/kg]	0.736	0.818
psSAR10g [W/kg]	0.274	0.300
Power Drift [dB]	-0.02	-0.07
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		74.2
Dist 3dB Peak [mm]		8.0

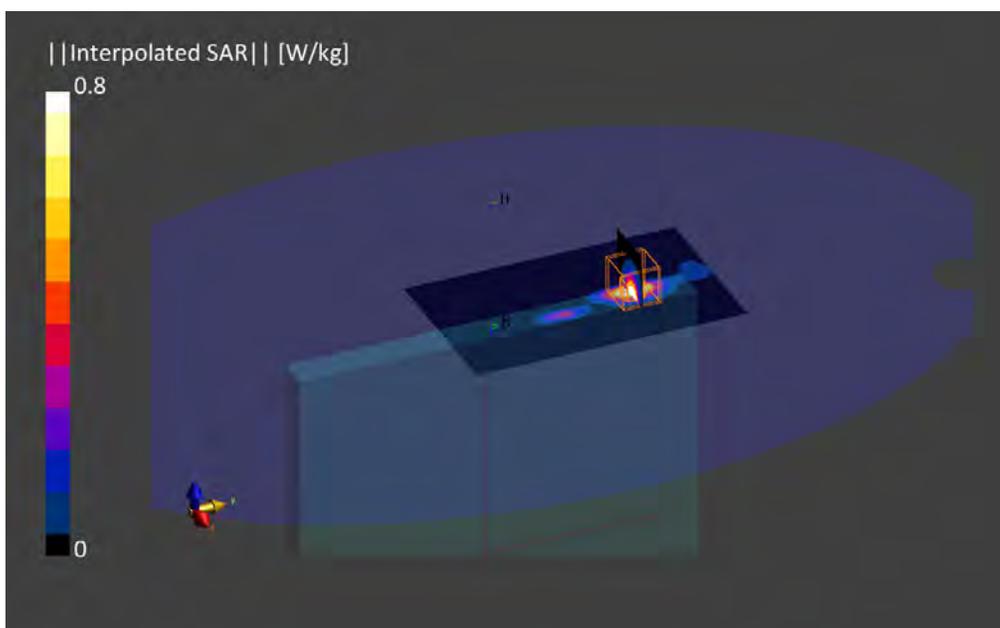

13. LTE Band 38, QPSK - 20MHz, CH38000, Ant 5, Laptop

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I55C	235.0 x 295.0 x 20.0	00027705HB	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Laptop, 0.00	Band 38, E-UTRA/FDD	LTE-FDD, 10175-CAG	2595, 38000	9.63	2.06	51.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2022-Apr-20	EX3DV4 - SN7604, 2021-08-16	DAE4 Sn1703, 2022-04-28

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	4.9 x 4.9 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-04-21, 11:23	2022-04-21, 11:23
psSAR1g [W/kg]	0.72	0.85
psSAR10g [W/kg]	0.35	0.39
Power Drift [dB]	-0.02	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		73.1
Dist 3dB Peak [mm]		4.6

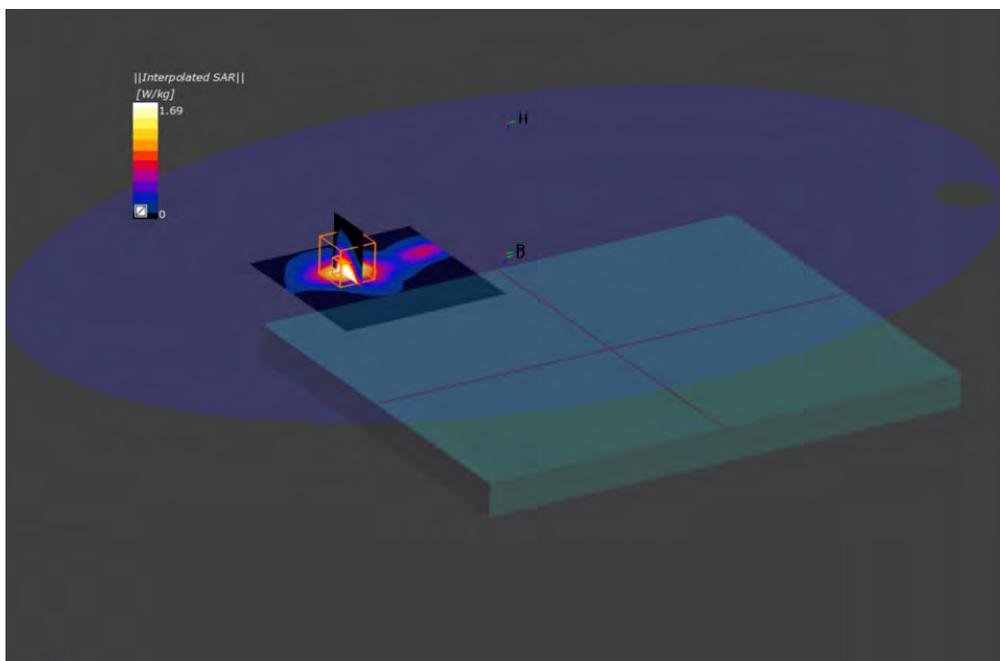

14. LTE Band 41, QPSK - 20MHz, CH40620, Ant 8, Left edge

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I55C	235.0 x 295.0 x 20.0	00027705HB	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE LEFT, 0.00	Band 41, E-UTRA/FDD	LTE-FDD, 10169-CAE	40620,2593 MHz	7.57	2.12	53.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MBBL-600-6000 , 2022-May-30	EX3DV4 - SN7604, 2021-08-16	DAE4 Sn1703, 2022-04-28

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 280.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	4.5 x 4.5 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-06-01, 13:24	2022-06-01, 13:32
psSAR1g [W/kg]	0.427	0.470
psSAR10g [W/kg]	0.160	0.159
Power Drift [dB]	-0.03	0.01
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		77.4
Dist 3dB Peak [mm]		8.1

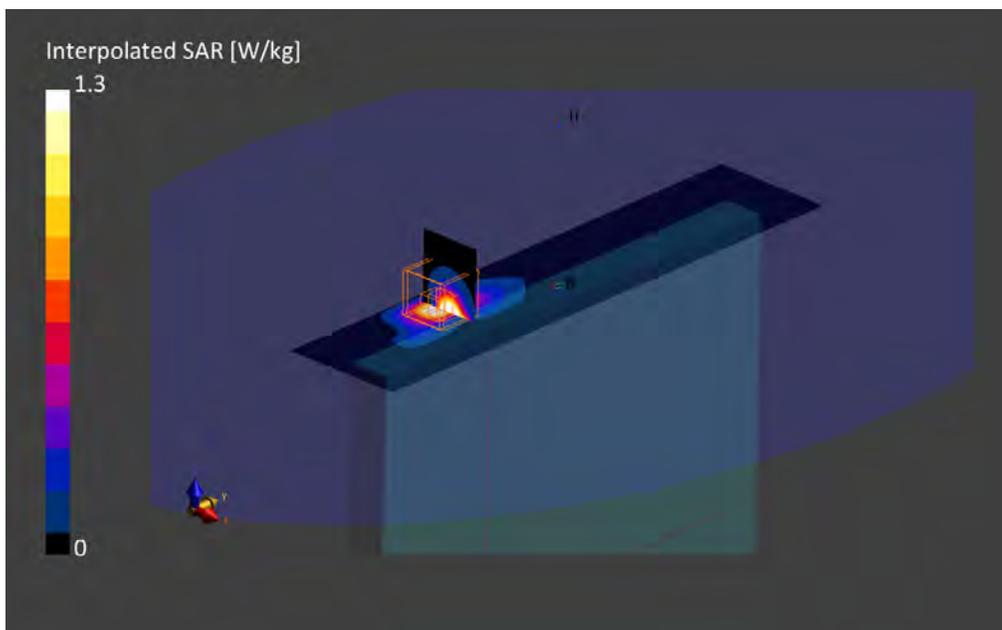

15. LTE Band 48, QPSK - 20MHz, CH55990, Ant 8, Left Edge

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I55C	235.0 x 295.0 x 20.0	00027705HB	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE LEFT, 0.00	Band 48, E-UTRA/TDD	LTE-TDD, 10435-AAF	3560.0, 55340	6.15	3.09	51.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MBBL-600-6000 , 2022-Apr-25	EX3DV4 - SN7604, 2021-08-16	DAE4 Sn1703, 2022-04-28

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 280.0	28.0 x 28.0 x 28.0
Grid Steps [mm]	10.0 x 10.0	3.1 x 3.1 x 1.2
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.2
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-04-27, 15:20	2022-04-27, 15:20
psSAR1g [W/kg]	0.591	0.598
psSAR10g [W/kg]	0.195	0.176
Power Drift [dB]	-0.04	-0.05
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		77.4
Dist 3dB Peak [mm]		8.1

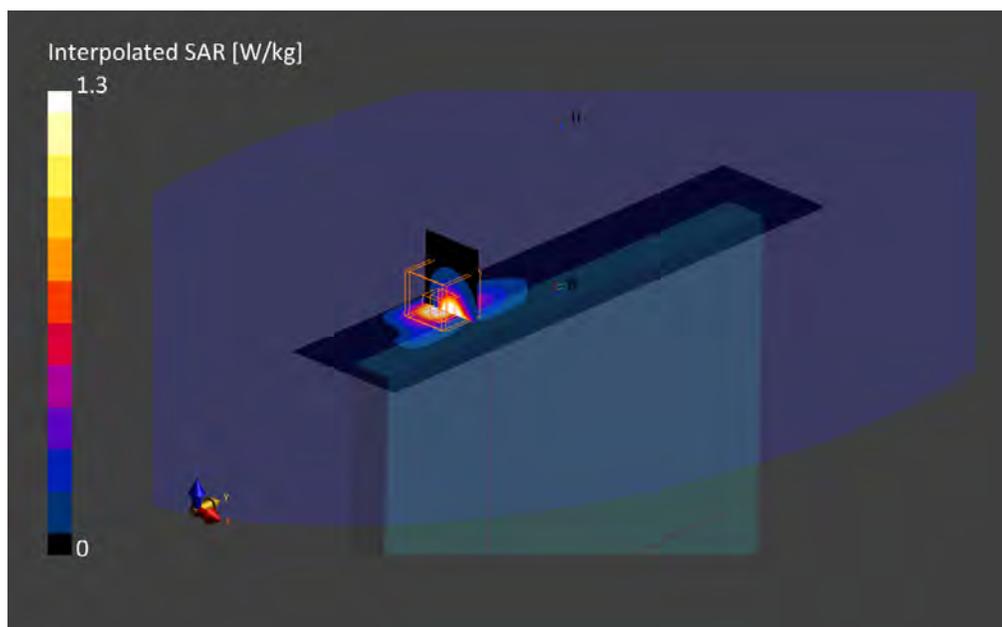

16. LTE Band 66, QPSK - 20MHz, CH132572, Ant 5, Laptop

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I55C	235.0 x 295.0 x 20.0	00027705HB	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Laptop, 0.00	Band 66, E-UTRA/FDD	LTE-FDD, 10169-CAE	1770.0, 132572	8.37	1.40	51.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000 2022-Apr-25	EX3DV4 - SN7604, 2021-08-16	DAE4 Sn1703, 2022-04-28

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-04-26, 12:38	2022-04-26, 12:44
psSAR1g [W/kg]	0.940	0.991
psSAR10g [W/kg]	0.500	0.512
Power Drift [dB]	0.00	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		84.0
Dist 3dB Peak [mm]		14.5

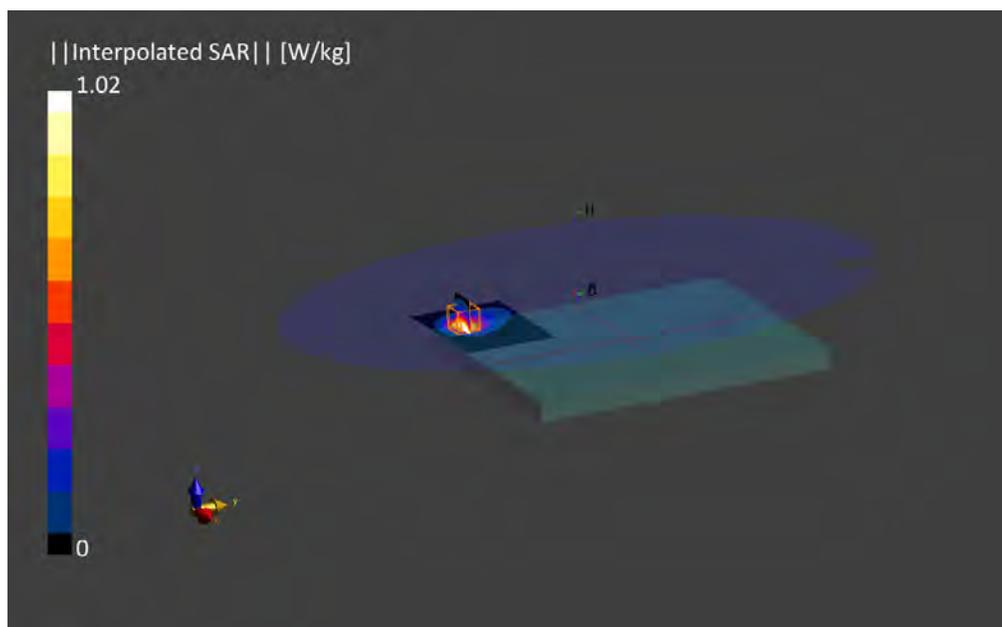

17. LTE Band 71, QPSK - 20MHz, CH133297, Ant 5, Bottom Edge

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I55C	235.0 x 295.0 x 20.0	00027705HB	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE BOTTOM, 0.00	Band 71, E-UTRA/FDD	LTE-FDD, 10169-CAE	680.5, 133297	9.69	0.89	52.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MBBL-600-6000 2022-Jun-14	EX3DV4 - SN7455, 2022-03-21	DAE4 Sn1703, 2022-04-28

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 330.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	5.8 x 5.8 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-06-14, 18:54	2022-06-14, 19:02
psSAR1g [W/kg]	0.631	0.757
psSAR10g [W/kg]	0.381	0.332
Power Drift [dB]	-0.01	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		85.0
Dist 3dB Peak [mm]		10.9

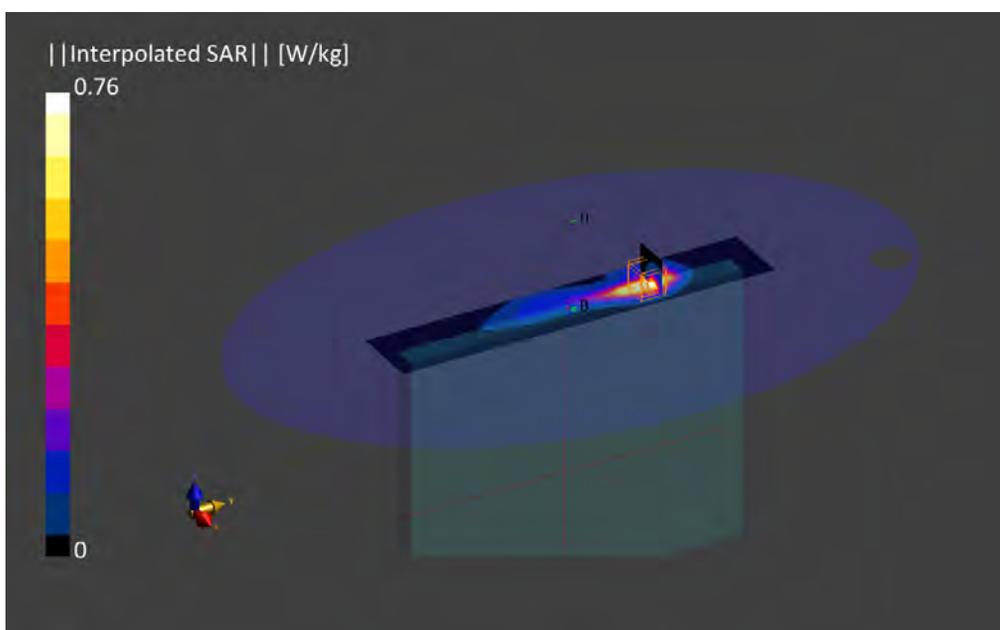

18.5G NR FR1 Band 2, QPSK – 20MHz, CH372000, Ant 8 – Left Edge

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I55C	220.0 x 290.0 x 20.0	00027705FM	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE LEFT, 0.00	Band n2	5G NR FR1 FDD, 10939-AAB	1860.0, 372000	7.59	1.53	53.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2124	MABL-600-6000, 2022-May-19	EX3DV4 - SN7455, 2022-03-21	DAE4 Sn1517, 2021-03-11

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	160.0 x 160.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.3 x 5.3 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-05-19, 13:44	2022-05-19, 13:56
psSAR1g [W/Kg]	0.819	0.853
psSAR10g [W/Kg]	0.370	0.365
Power Drift [dB]	0.04	0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		80.3
Dist 3dB Peak [mm]		5.3

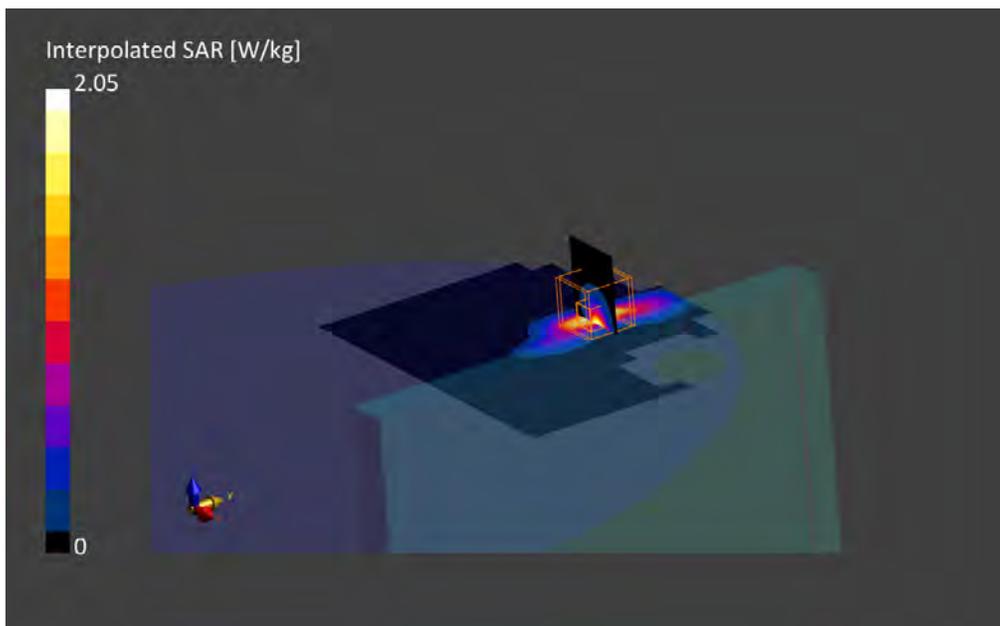

19.5G NR FR1 Band 5, QPSK – 20MHz, CH167300, Ant 5 – Bottom Edge

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I55C	220.0 x 290.0 x 20.0	00027705FM	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE, BOTTOM, 0.00	Band n5	5G NR FR1 FDD, 10931-AAB	836.5, 167300	9.34	0.967	55.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2124	MABL-600-6000, 2022-May-16	EX3DV4 - SN7455, 2022-03-21	DAE4 Sn1517, 2021-03-11

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 160.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-05-16, 15:14	2022-05-16, 15:22
psSAR1g [W/Kg]	0.708	0.713
psSAR10g [W/Kg]	0.391	0.362
Power Drift [dB]	0.03	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		73.8
Dist 3dB Peak [mm]		7.2

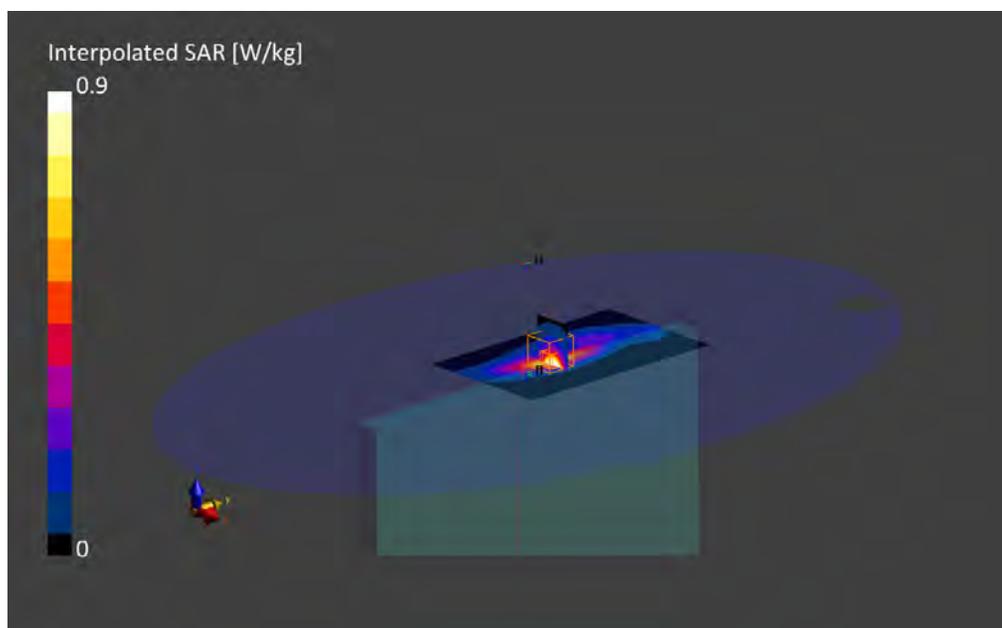

20. 5G NR FR1 Band 7, QPSK – 20MHz, CH507000, Ant 5 – Bottom Edge

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I55C	220.0 x 290.0 x 20.0	00027705FM	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE BOTTOM, 0.00	Band n7	5G NR FR1 FDD, 10939-AAB	2535.0, 507000	7.3	2.06	52.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2124	MBBL-600-6000, 2022-May-16	EX3DV4 - SN7455, 2022-03-21	DAE4 Sn1517, 2021-03-11

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 160.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-05-16, 18:58	2022-05-16, 19:08
psSAR1g [W/Kg]	0.425	0.461
psSAR10g [W/Kg]	0.187	0.194
Power Drift [dB]	0.07	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		74.6
Dist 3dB Peak [mm]		5.8

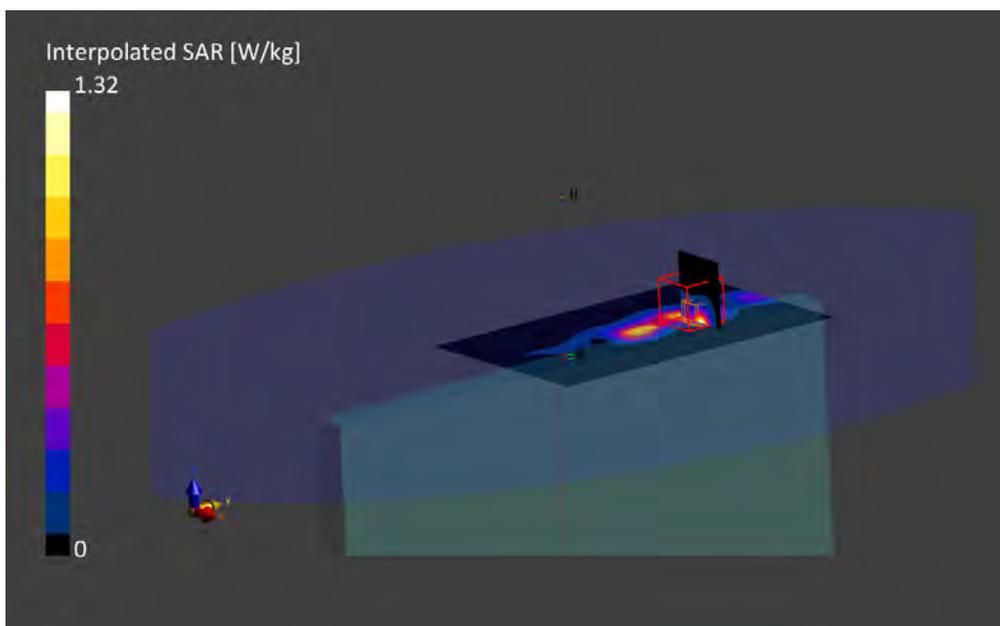

21.5G NR FR1 Band 25, QPSK – 20MHz, CH376500, Ant 5 – Bottom Edge

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I55C	220.0 x 290.0 x 20.0	00027705FM	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE, BOTTOM, 0.00	Band n25	5G NR FR1 FDD, 10931-AAB	1880.0, 376000	7.59	1.52	53.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2124	MABL-600-6000, 2022-May-16	EX3DV4 - SN7455, 2022-03-21	DAE4 Sn1517, 2021-03-11

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 160.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.8 x 5.8 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-05-16, 20:04	2022-05-16, 20:14
psSAR1g [W/Kg]	0.616	0.632
psSAR10g [W/Kg]	0.280	0.296
Power Drift [dB]	0.04	0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		83.7
Dist 3dB Peak [mm]		7.0

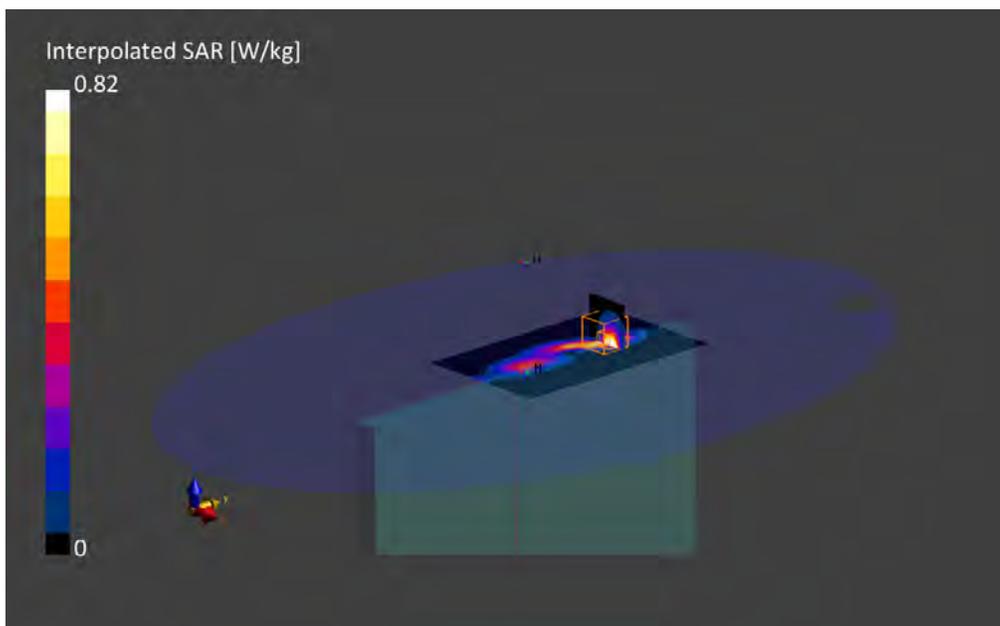

22.5G NR FR1 Band 30, QPSK – 10MHz, CH462000, Ant 5 – Bottom Edge

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I55C	220.0 x 290.0 x 20.0	00027705FM	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE, BOTTOM, 0.00	Band n30	5G NR FR1 FDD, 10937-AAB	2310.0, 462000	7.51	1.85	53.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2124	MBBL-600-6000, 2022-May-16	EX3DV4 - SN7455, 2022-03-21	DAE4 Sn1517, 2021-03-11

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 160.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	4.5 x 4.5 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-05-16, 20:26	2022-05-16, 20:38
psSAR1g [W/Kg]	0.606	0.687
psSAR10g [W/Kg]	0.240	0.260
Power Drift [dB]	0.11	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		77.4
Dist 3dB Peak [mm]		5.2

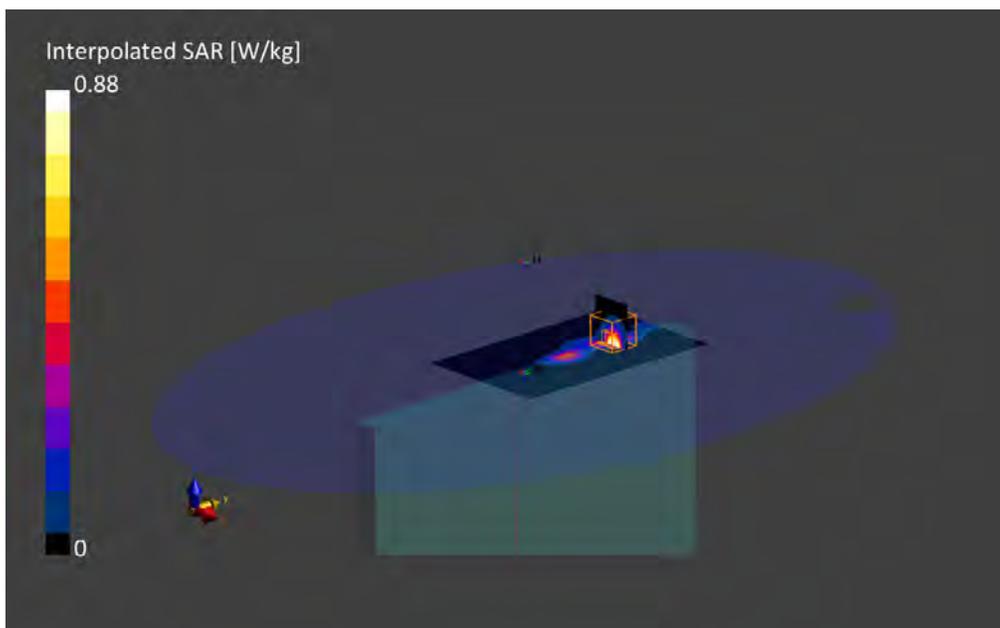

23.5G NR FR1 Band 38, QPSK – 40MHz, CH519000, Ant 5 – Bottom Edge

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I55C	220.0 x 290.0 x 20.0	00027705FM	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE BOTTOM, 0.00	Band n38	5G NR FR1 TDD, 10913-AAB	2595.0, 519000	7.3	2.11	52.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2124	MBBL-600-6000, 2022-May-16	EX3DV4 - SN7455, 2022-03-21	DAE4 Sn1517, 2021-03-11

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 160.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-05-16, 21:13	2022-05-16, 21:23
psSAR1g [W/Kg]	0.702	0.728
psSAR10g [W/Kg]	0.330	0.335
Power Drift [dB]	0.02	0.09
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		73.0
Dist 3dB Peak [mm]		5.4

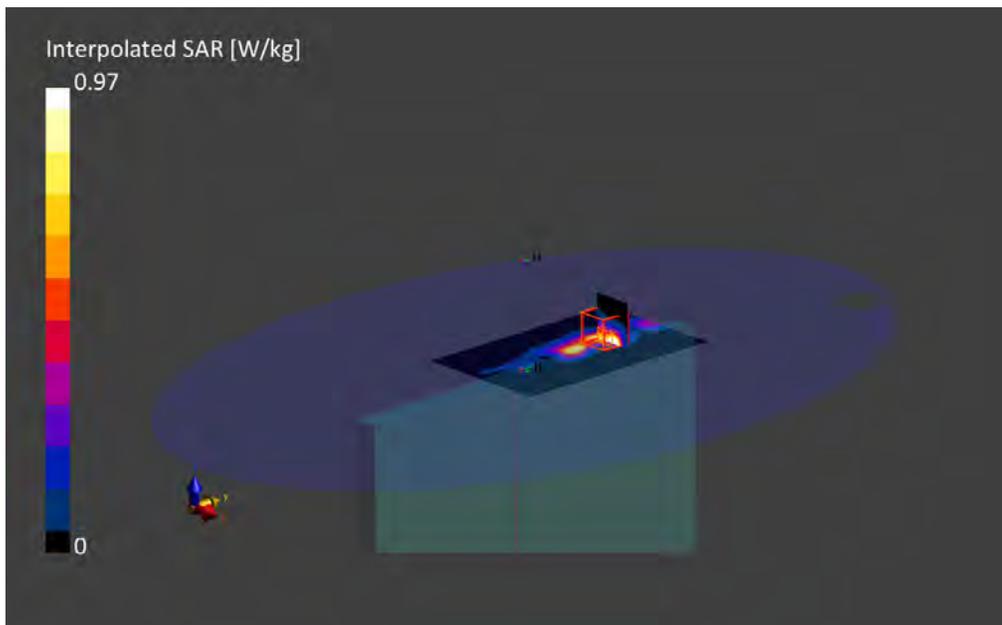

24.5G NR FR1 Band 41, QPSK – 100MHz, CH518601, Ant 5 – Laptop

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I55C	220.0 x 290.0 x 20.0	00027705FL	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Laptop, 0.00	Band n41	5G NR FR1 TDD, 10917-AAB	2593.0, 518598	7.3	2.14	52.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2124	MBBL-600-6000, 2022-May-19	EX3DV4 - SN7455, 2022-03-21	DAE4 Sn1517, 2021-03-11

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 160.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-05-20, 17:45	2022-05-20, 17:56
psSAR1g [W/Kg]	0.768	0.802
psSAR10g [W/Kg]	0.368	0.372
Power Drift [dB]	-0.02	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		82.7
Dist 3dB Peak [mm]		8.0

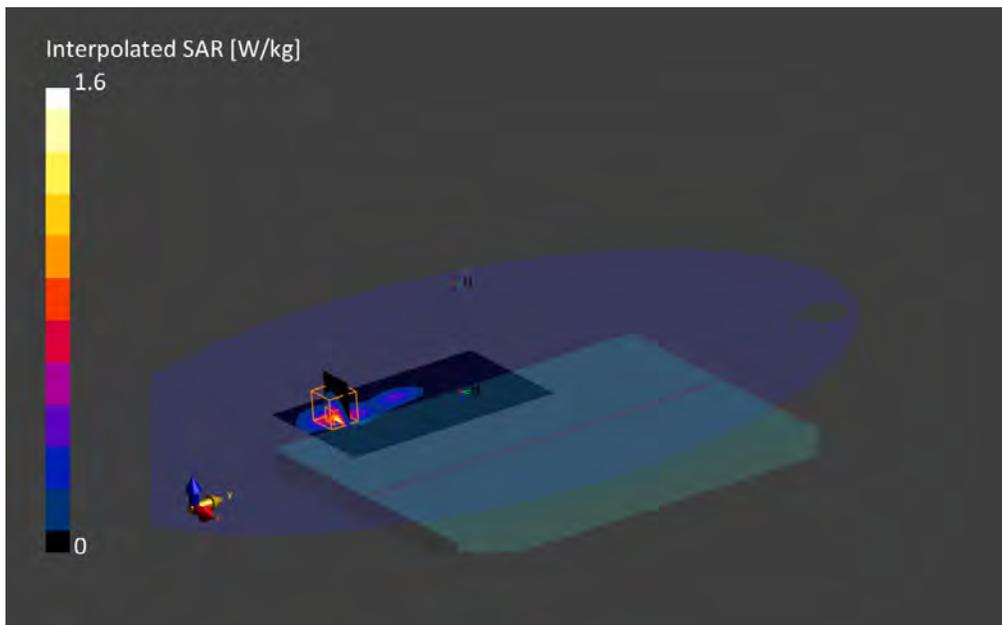

25.5G NR FR1 Band 66, QPSK – 40MHz, CH349000, Ant 5 – Laptop

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I55C	220.0 x 290.0 x 20.0	00027705FL	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Laptop, 0.00	Band n66	5G NR FR1 FDD, 10950-AAB	1745.0, 349000	9.02	1.52	51.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2124	MBBL-600-6000, 2022-May-09	EX3DV4 - SN7604, 2021-08-16	DAE4 Sn1628, 2021-08-06

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 160.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	4.9 x 4.9 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-05-11, 02:55	2022-05-11, 03:08
psSAR1g [W/Kg]	0.754	0.889
psSAR10g [W/Kg]	0.331	0.344
Power Drift [dB]	-0.05	-0.06
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		77.2
Dist 3dB Peak [mm]		4.9

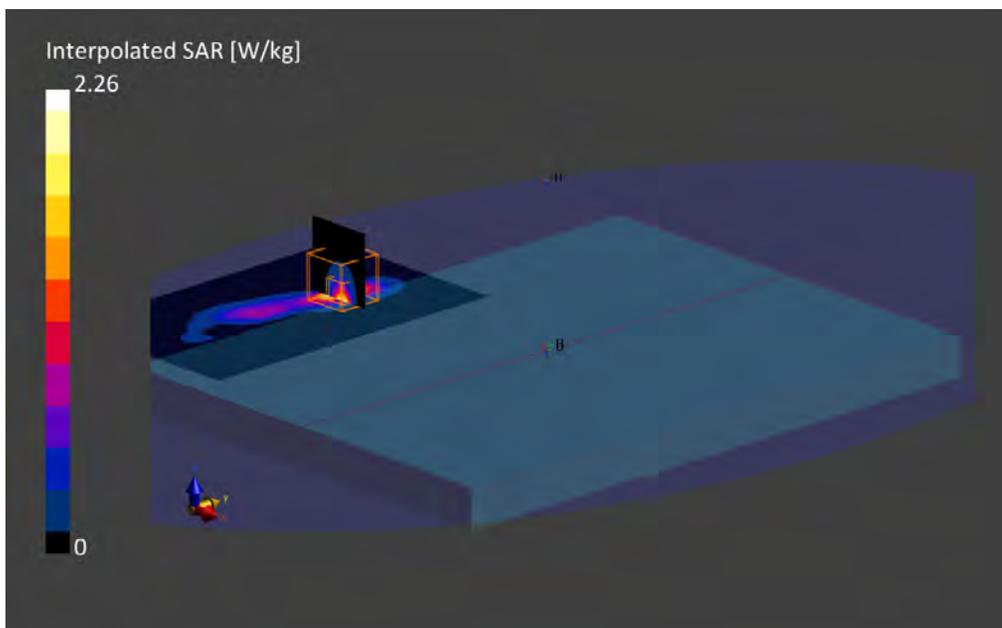

26.5G NR FR1 Band 71, QPSK – 20MHz, CH136100, Ant 5 – Bottom Edge

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I55C	220.0 x 290.0 x 20.0	00027705FM	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE, BOTTOM, 0.00	Band n71	5G NR FR1 FDD, 10931-AAB	680.5, 136100	9.69	0.883	55.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2124	MBBL-600-6000, 2022-Jun-13	EX3DV4 - SN7455, 2022-03-21	DAE4ip Sn1704, 2022-04-29

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 160.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	4.9 x 4.9 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-06-13, 12:41	2022-06-13, 12:55
psSAR1g [W/Kg]	0.704	0.810
psSAR10g [W/Kg]	0.397	0.366
Power Drift [dB]	-0.03	0.11
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		68.7
Dist 3dB Peak [mm]		5.9

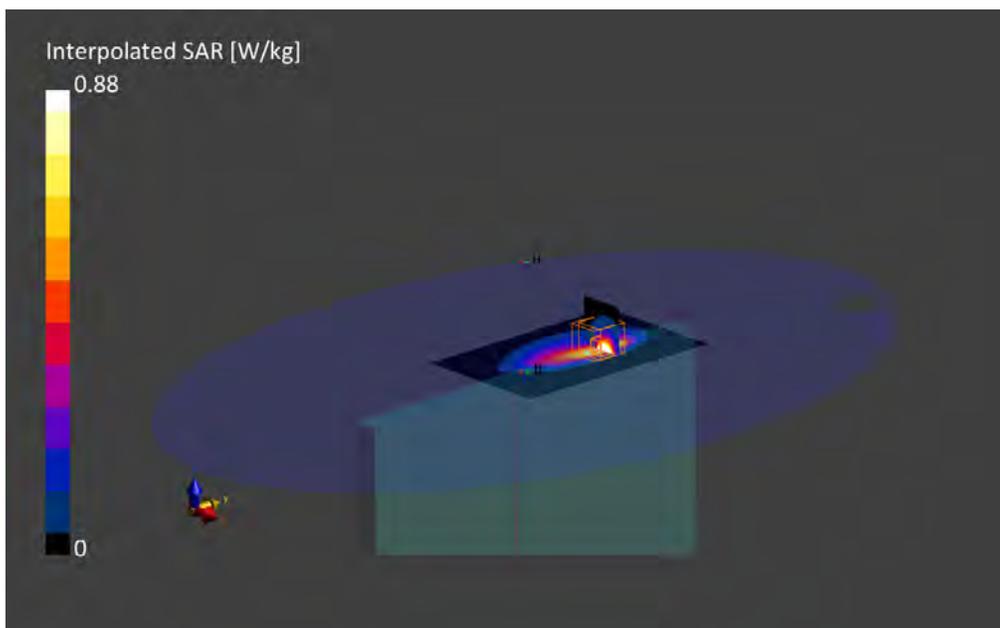

27. 5G NR FR1 Band 77, QPSK – 100MHz, CH650000, Ant 5 – Bottom Edge

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
HSN-I55C	220.0 x 290.0 x 20.0	00027705FM	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE, BOTTOM, 0.00	Band n77	5G NR FR1 TDD, 10868-AAD	3750.0, 650000	6.13	3.31	50.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2124	MBBL-600-6000, 2022-May-16	EX3DV4 - SN7455, 2022-03-21	DAE4 Sn1517, 2021-03-11

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 160.0	28.0 x 28.0 x 28.0
Grid Steps [mm]	10.0 x 10.0	4.8 x 4.8 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-05-17, 11:29	2022-05-17, 11:39
psSAR1g [W/Kg]	0.963	1.00
psSAR10g [W/Kg]	0.283	0.304
Power Drift [dB]	0.01	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		74.3
Dist 3dB Peak [mm]		5.2

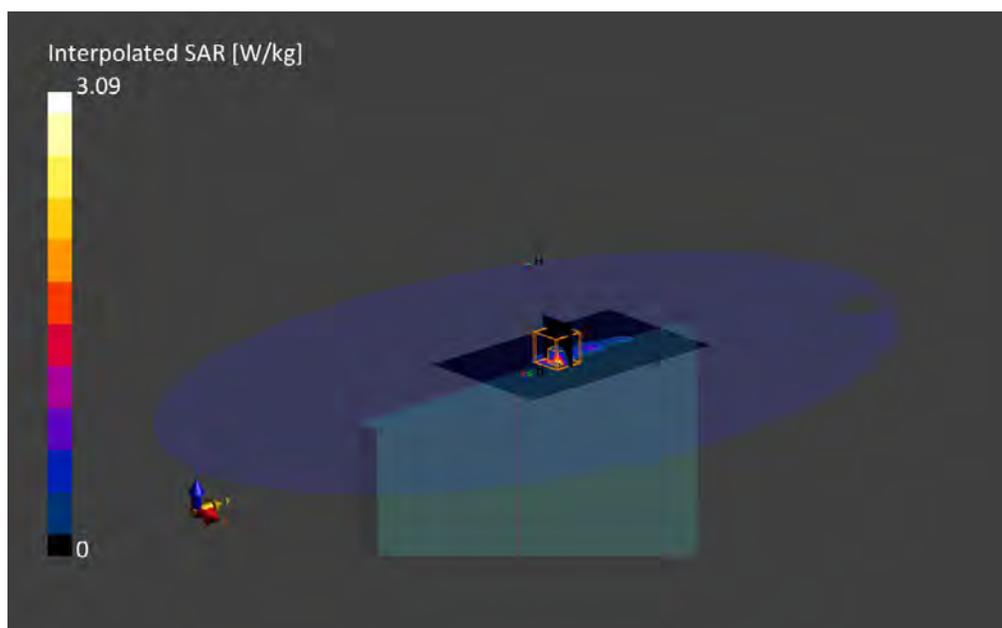

28.5G NR FR1 Band 78, QPSK – 100MHz, CH650000, Ant 8 – Left Edge

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I55C	220.0 x 290.0 x 20.0	00027705FM	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE LEFT, 0.00	Band n78	5G NR FR1 TDD, 10917-AAB	3750.0, 650000	6.13	3.35	50.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2124	MBBL-600-6000, 2022-May-19	EX3DV4 - SN7455, 2022-03-21	DAE4 Sn1517, 2021-03-11

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	160.0 x 160.0	28.0 x 28.0 x 28.0
Grid Steps [mm]	10.0 x 10.0	3.2 x 3.2 x 1.2
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.2
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-05-19, 21:30	2022-05-19, 21:54
psSAR1g [W/Kg]	0.544	0.677
psSAR10g [W/Kg]	0.178	0.191
Power Drift [dB]	0.01	-0.10
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		78.1
Dist 3dB Peak [mm]		4.5

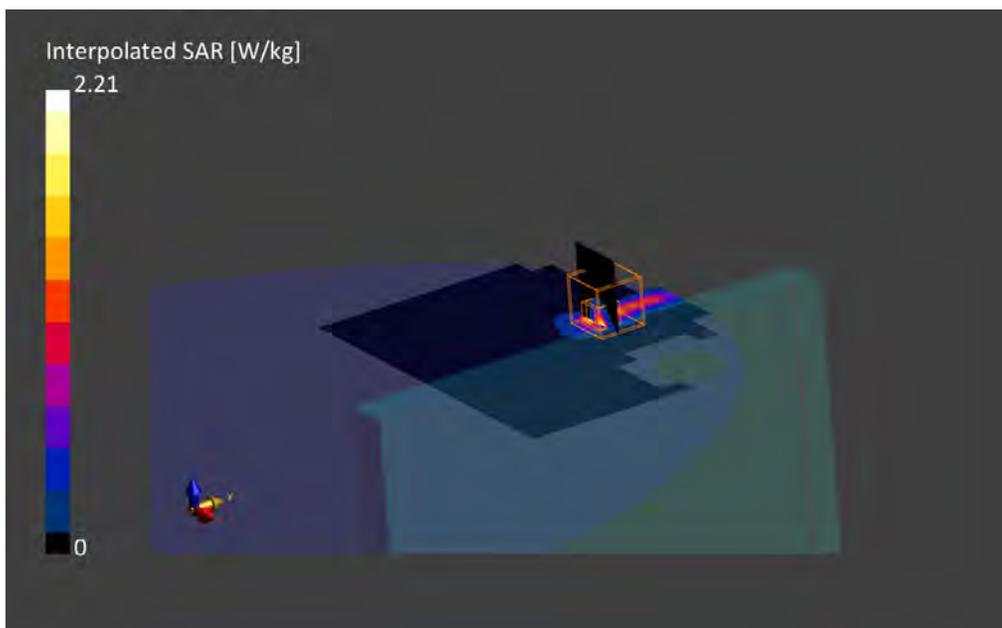

29. System Check Body Liquid 750MHz – 2022-04-21 – System2

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
Dipole 750MHz, SPEAG	50.0 x 10.0 x 8.0	1136	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,	,	0--	750.0, 0	9.63	0.91	53.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MBBL-600-6000 , 2022-Apr-20	EX3DV4 - SN7604, 2021-08-16	DAE4 Sn1703, 2022-04-28

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-04-21, 07:40	2022-04-21, 07:45
psSAR 1g [W/kg]	0.453	0.444
psSAR 10g [W/kg]	0.304	0.291
Power Drift [dB]	-0.07	-0.07
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		87.7
Dist 3dB Peak [mm]		23.1

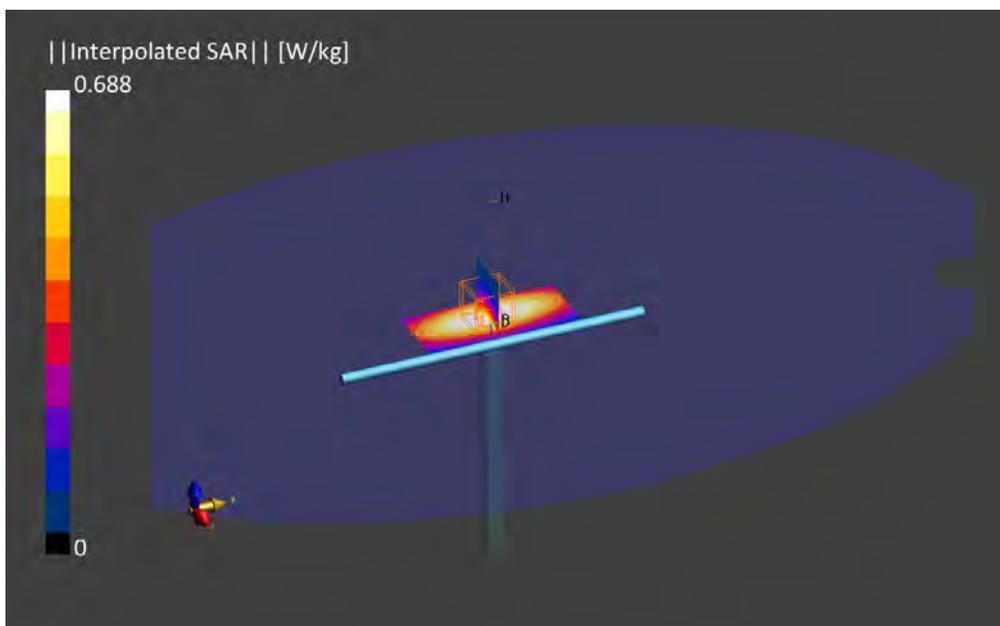

30. System Check Body Liquid 750MHz – 2022-06-14 – System 2

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
Dipole 750MHz, SPEAG	50.0 x 10.0 x 8.0	1136	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,	,	0--	750.0, 0	9.69	0.92	52.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000 , 2022-Jun-13	EX3DV4 - SN7604, 2021-08-16	DAE4 Sn1703, 2022-04-28

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-06-14, 11:15	2022-06-14, 11:21
psSAR1g [W/kg]	0.419	0.427
psSAR10g [W/kg]	0.279	0.286
Power Drift [dB]	-0.00	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		87.5
Dist 3dB Peak [mm]		22.9

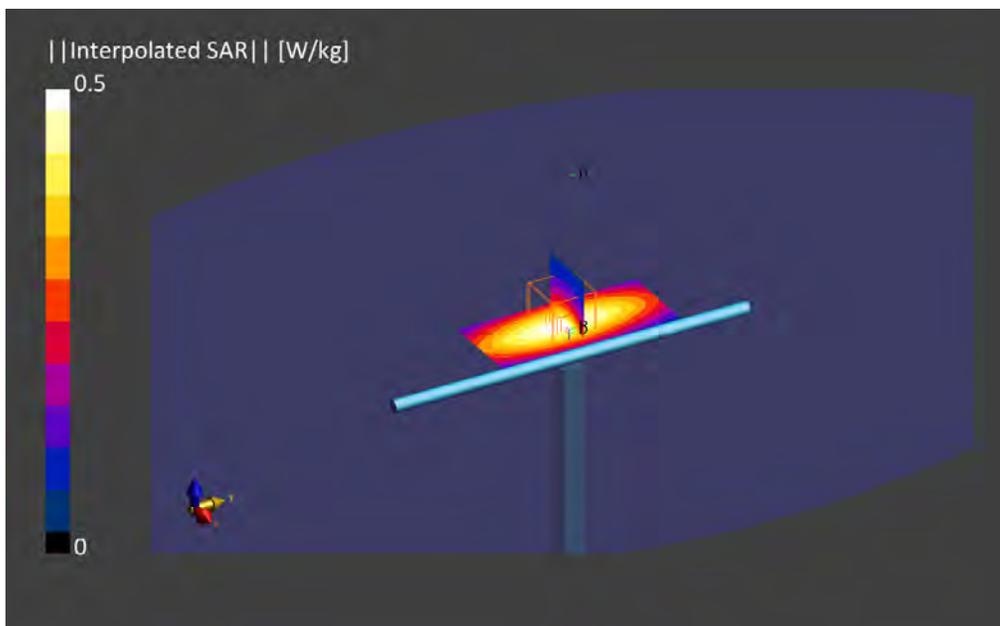

31. System Check Body Liquid 750MHz – 2022-06-13 – System 4

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
Dipole 750MHz, SPEAG	50.0 x 10.0 x 8.0	1136	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		, 0--	750.0, 0	9.69	0.906	54.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2124	MABL-600-6000, 2022-Jun-13	EX3DV4 - SN7455, 2022-03-21	DAE4ip Sn1704, 2022-04-29

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-06-13, 10:54	2022-06-13, 11:00
psSAR1g [W/Kg]	0.450	0.448
psSAR10g [W/Kg]	0.299	0.292
Power Drift [dB]	0.04	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		84.2
Dist 3dB Peak [mm]		22.9

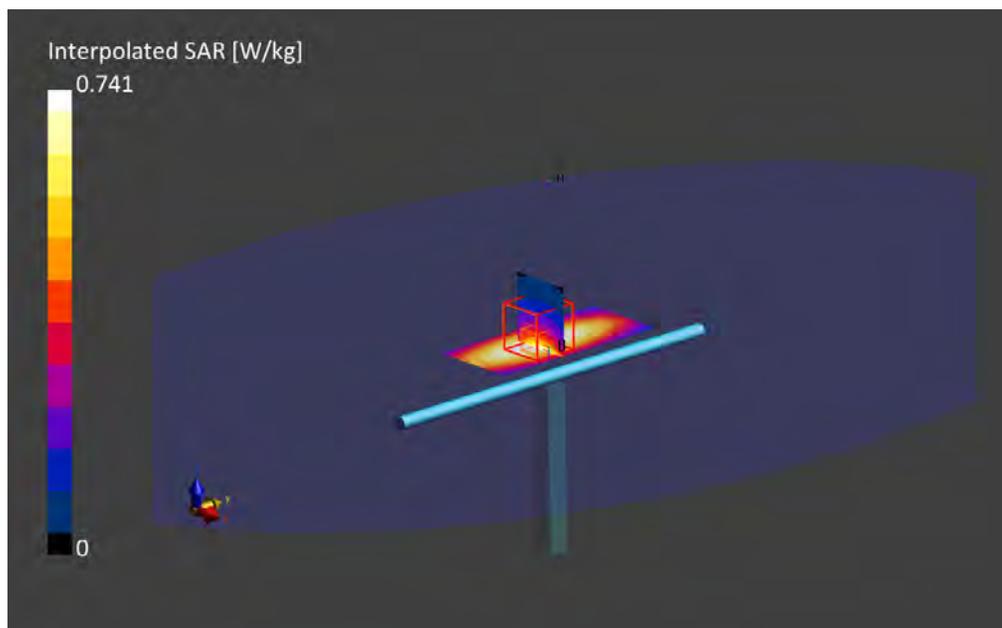

32. System Check Body Liquid 835MHz – 2022-04-21 – System 2

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
Dipole 835MHz, SPEAG	50.0 x 10.0 x 8.0	4d192	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		0--	835.0, 0	9.32	0.93	53.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) -	MBBL-600-6000 , 2022-Apr-20	EX3DV4 - SN7604, 2021-08-16	DAE4 Sn1703, 2022-04-28

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-04-21, 07:52	2022-04-21, 07:57
psSAR1g [W/kg]	0.506	0.519
psSAR10g [W/kg]	0.334	0.337
Power Drift [dB]	-0.03	-0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		86.1
Dist 3dB Peak [mm]		16.8

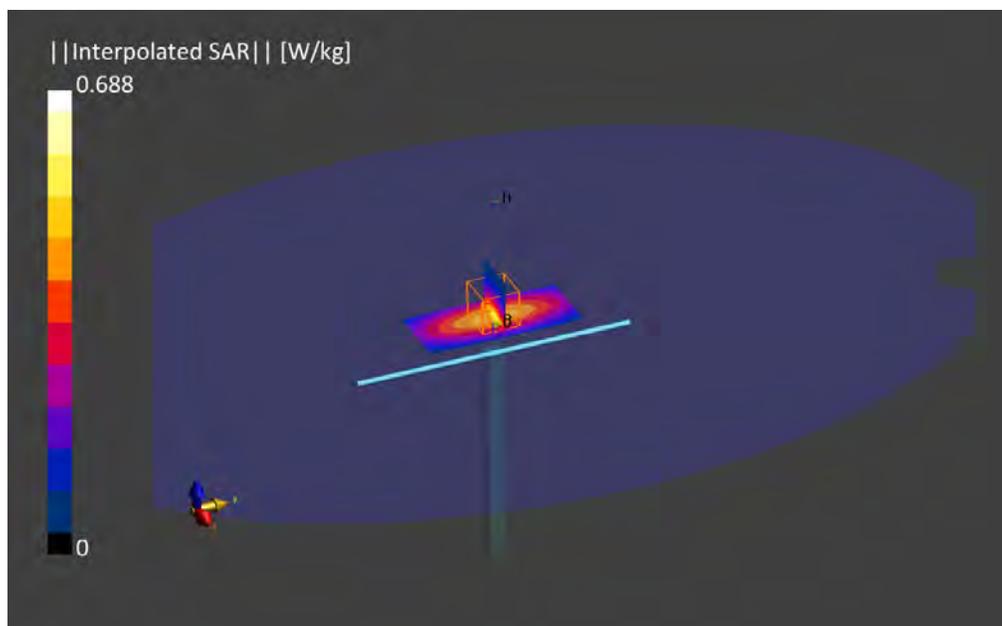

33. System Check Body Liquid 835MHz – 2022-05-31 – System 2

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
Dipole 835MHz, SPEAG	50.0 x 10.0 x 8.0	4d192	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		0--	835.0, 0	9.79	0.97	55.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MBBL-600-6000 ,2022-May-30	EX3DV4 - SN7604, 2021-08-16	DAE4 Sn1703, 2022-04-28

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-05-31, 15:54	2022-05-31, 16:00
psSAR1g [W/kg]	0.479	0.482
psSAR10g [W/kg]	0.314	0.318
Power Drift [dB]	0.01	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		84.6
Dist 3dB Peak [mm]		15.6

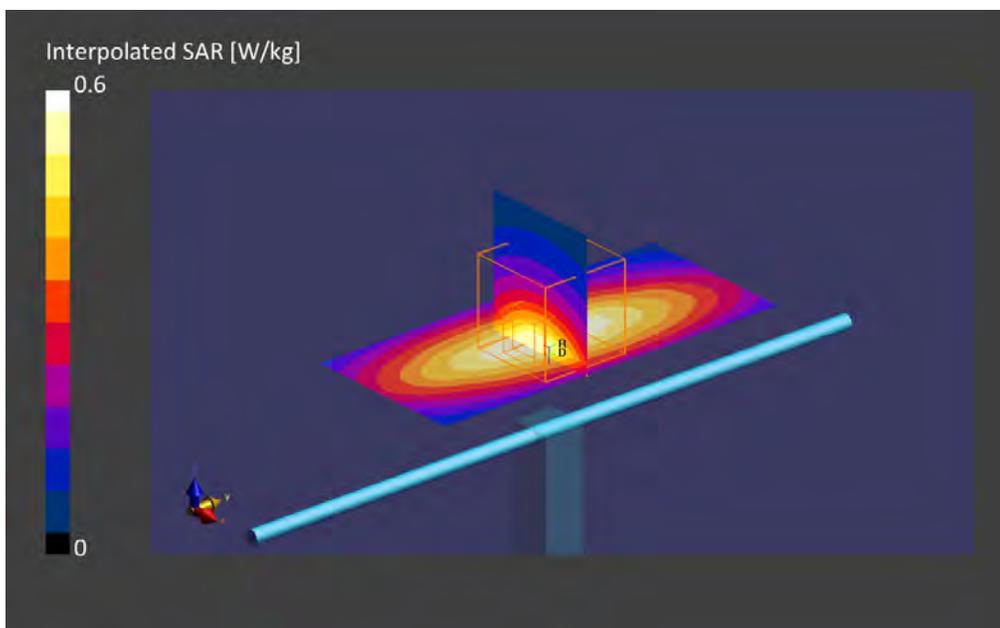

34. System Check Body Liquid 835MHz – 2022-05-17 – System 4

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
Dipole 835MHz, SPEAG	50.0 x 10.0 x 8.0	4d192	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		0--	835.0, 0	9.34	0.970	55.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2124	MBBL-600-6000, 2022-May-16	EX3DV4 - SN7455, 2022-03-21	DAE4 Sn1517, 2021-03-11

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-05-17, 14:24	2022-05-17, 14:30
psSAR1g [W/Kg]	0.552	0.518
psSAR10g [W/Kg]	0.362	0.341
Power Drift [dB]	-0.08	-0.09
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		87.4
Dist 3dB Peak [mm]		19.7

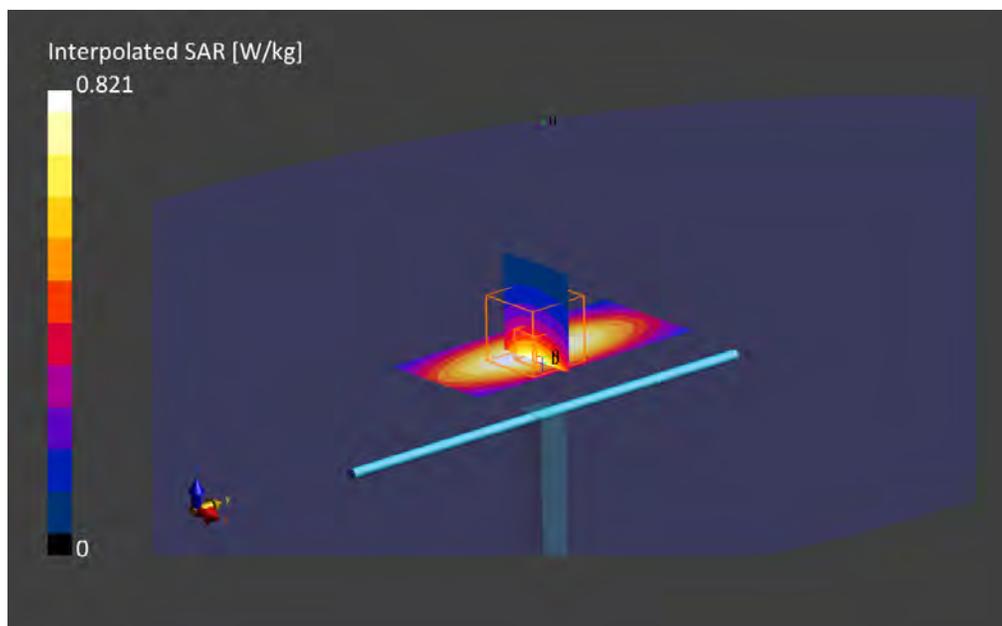

35. System Check Body Liquid 1750MHz – 2022-05-26 – System 2

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
Dipole 1750MHz, SPEAG	50.0 x 10.0 x 8.0	1133	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		, 0--	1750.0, 0	8.37	1.39	51.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) -	MBBL-600-6000 22-Apr-25	EX3DV4 - SN7604, 2021-08-16	DAE4 Sn1703, 2022-04-28

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	Yes	Yes
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-04-26, 10:48	2022-04-26, 10:53
psSAR1g [W/Kg]	1.77	1.77
psSAR10g [W/Kg]	0.943	0.951
Power Drift [dB]	0.00	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only

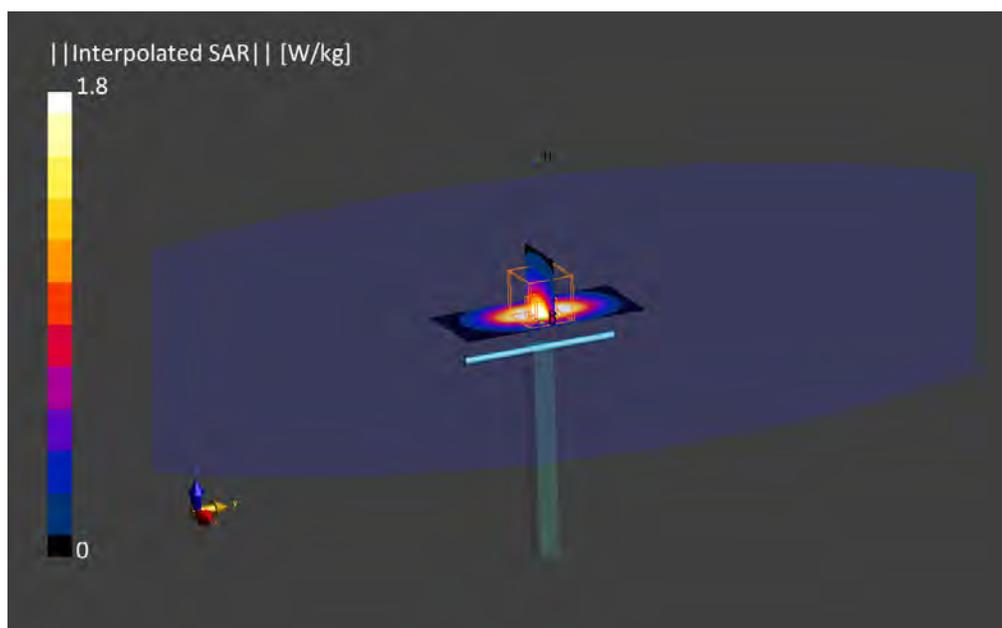

36. System Check Body Liquid 1750MHz – 2022-12-05 – System 4

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
Dipole 1750MHz, SPEAG	50.0 x 10.0 x 20.0	1133	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		, 0--	1750.0, 0	7.91	1.53	51.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2124	MABL-600-6000, 2022-May-09	EX3DV4 - SN7455, 2022-03-21	DAE4 Sn1517, 2021-03-11

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-05-12, 14:16	2022-05-12, 14:22
psSAR1g [W/Kg]	1.93	1.74
psSAR10g [W/Kg]	1.02	0.939
Power Drift [dB]	0.01	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		83.6
Dist 3dB Peak [mm]		9.1

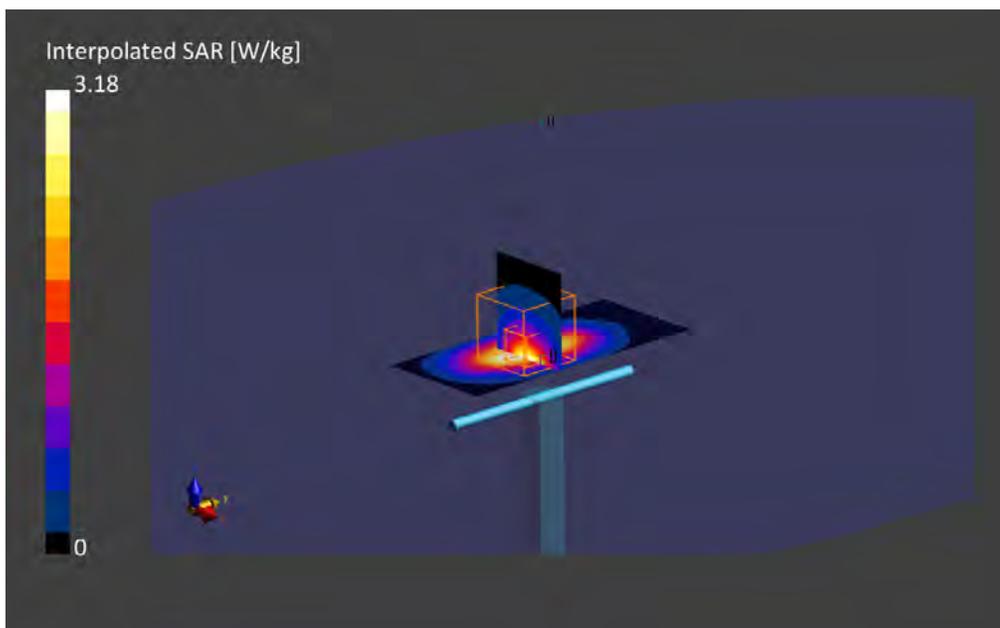

37. System Check Body Liquid 1900MHz – 2022-04-22 – System 2

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	S/N	DUT Type
Dipole 1900MHz, SPEAG	50.0 x 10.0 x 8.0	5d197	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,	,	0--	1900.0, 0	7.98	1.49	52.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000 , 2022-Apr-20	EX3DV4 - SN7604, 2021-08-16	DAE4 Sn1703, 2022-04-28

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-04-22, 15:57	2022-04-22, 16:02
psSAR1g [W/kg]	1.78	1.84
psSAR10g [W/kg]	0.937	0.962
Power Drift [dB]	0.01	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		83.7
Dist 3dB Peak [mm]		9.6

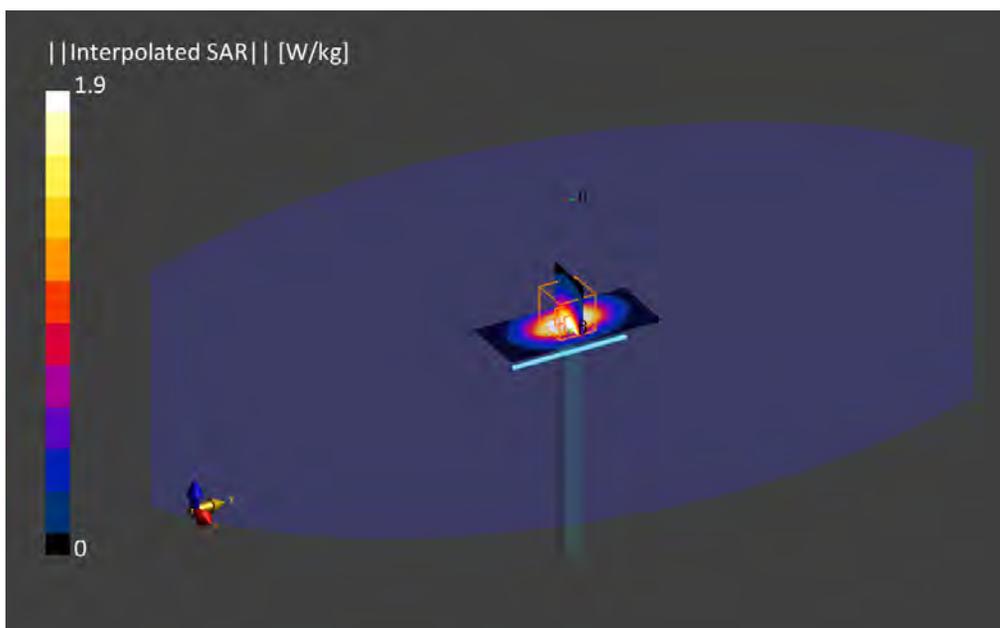

38. System Check Body Liquid 1900MHz – 2022-04-28 – System 2

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	S/N	DUT Type
Dipole 1900MHz, SPEAG	50.0 x 10.0 x 8.0	5d197	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,	,	0--	1900.0, 0	7.98	1.48	51.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000 , 2022-Apr-25	EX3DV4 - SN7604, 2021-08-16	DAE4 Sn1703, 2022-04-28

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-04-27, 10:16	2022-04-27, 10:21
psSAR1g [W/kg]	1.84	1.94
psSAR10g [W/kg]	0.938	1.01
Power Drift [dB]	-0.01	-0.08
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		84.7
Dist 3dB Peak [mm]		9.6

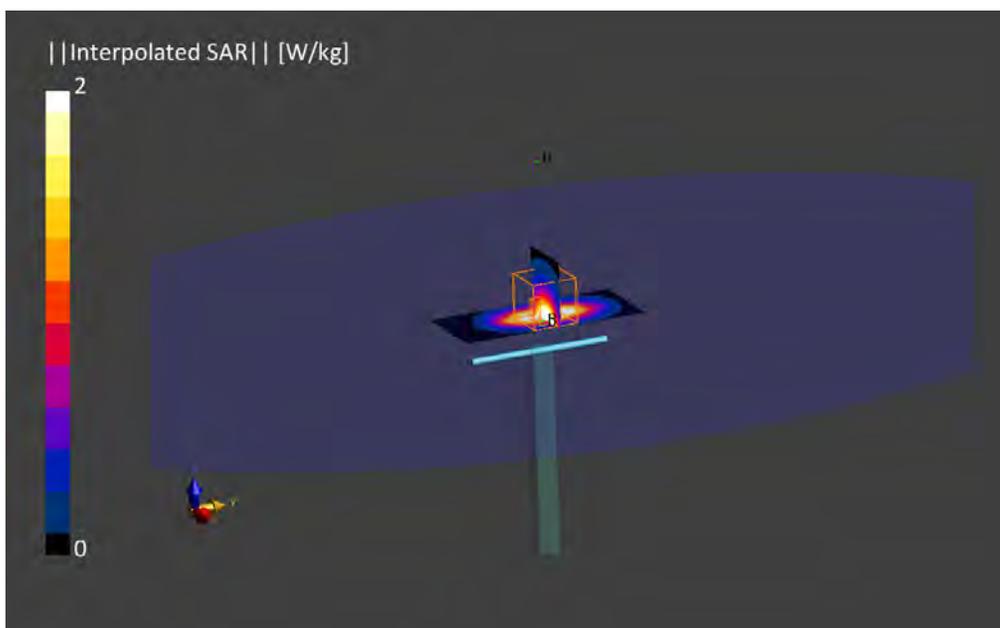

39. System Check Body Liquid 1900MHz – 2022-17-05 – System 4

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
Dipole 1900MHz, SPEAG	50.0 x 10.0 x 20.0	5d197	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		0--	1900.0, 0	7.59	1.54	53.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2124	MABL-600-6000, 2022-May-16	EX3DV4 - SN7455, 2022-03-21	DAE4 Sn1517, 2021-03-11

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-05-17, 14:36	2022-05-17, 14:42
psSAR1g [W/Kg]	2.09	2.14
psSAR10g [W/Kg]	1.07	1.12
Power Drift [dB]	-0.02	0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		82.1
Dist 3dB Peak [mm]		9.6

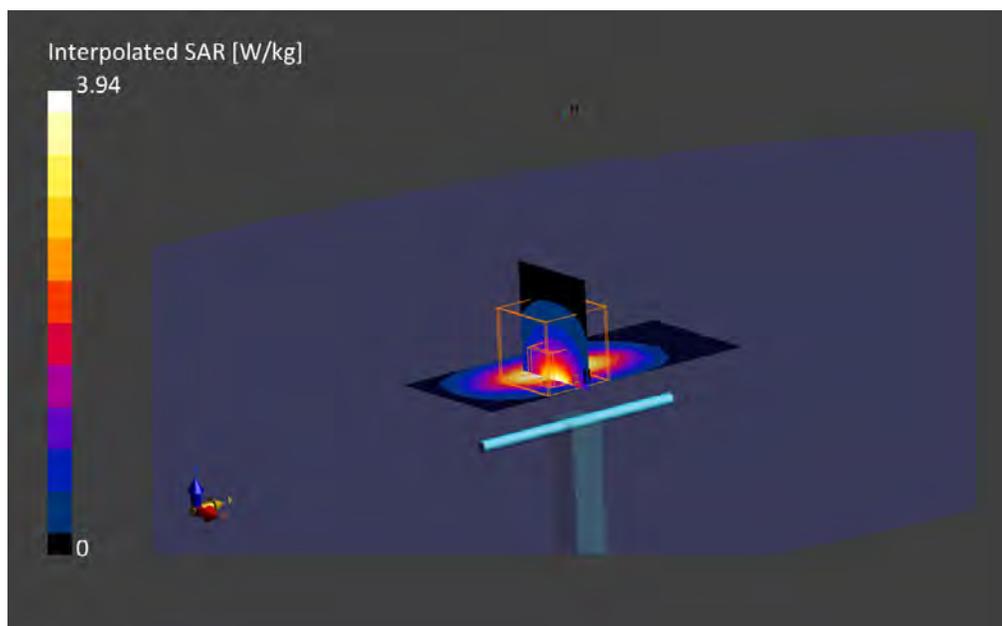

40. System Check Body Liquid 1900MHz – 2022-19-05 – System 4

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
Dipole 1900MHz, SPEAG	50.0 x 10.0 x 20.0	5d197	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,	,	0--	1900.0, 0	7.59	1.56	53.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2124	MBBL-600-6000, 2022-May-19	EX3DV4 - SN7455, 2022-03-21	DAE4 Sn1517, 2021-03-11

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-05-19, 16:04	2022-05-19, 16:10
psSAR1g [W/Kg]	1.96	1.99
psSAR10g [W/Kg]	1.00	1.04
Power Drift [dB]	-0.01	-0.09
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		84.1
Dist 3dB Peak [mm]		9.6

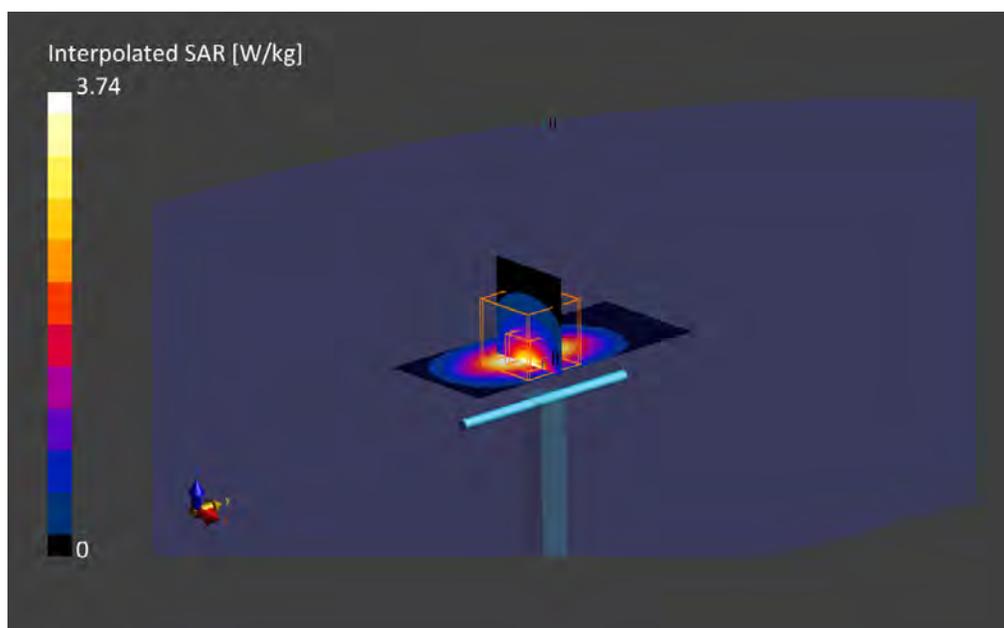

41. System Check Body Liquid 2300MHz – System 2

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
D2300MHz, SPEAG	50.0 x 10.0 x 8.0	1046	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,	,	0--	2300.0, 0	7.45	1.79	51.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) -	MBBL-600-6000 , 2022-Apr-20	EX3DV4 - SN7604, 2021-08-16	DAE4 Sn1703, 2022-04-28

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-04-21, 08:39	2022-04-21, 08:45
psSAR 1g [W/kg]	2.39	2.41
psSAR 10g [W/kg]	1.12	1.15
Power Drift [dB]	0.03	-0.08
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		82.7
Dist 3dB Peak [mm]		9.0

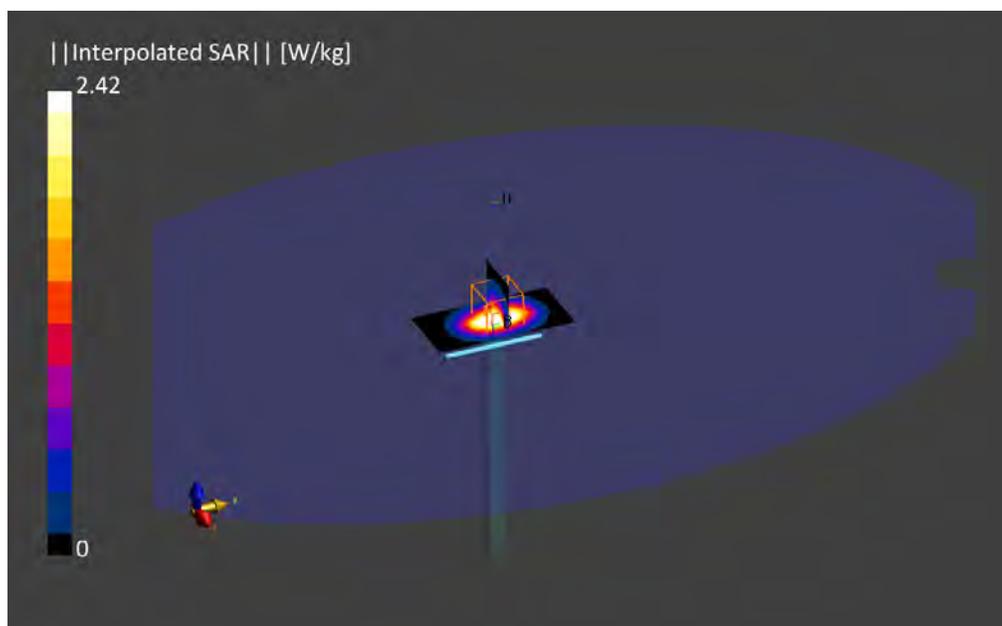

42. System Check Body Liquid 2300MHz – 2022-17-05 – System 4

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
D2300MHZ, SPEAG	50.0 x 10.0 x 8.0	1046	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		, 0--	2300.0, 0	7.51	1.84	53.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2124	MABL-600-6000, 2022-May-16	EX3DV4 - SN7455, 2022-03-21	DAE4 Sn1517, 2021-03-11

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-05-17, 14:50	2022-05-17, 14:57
psSAR1g [W/Kg]	2.09	2.20
psSAR10g [W/Kg]	0.978	1.06
Power Drift [dB]	0.01	0.06
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		82.7
Dist 3dB Peak [mm]		8.9

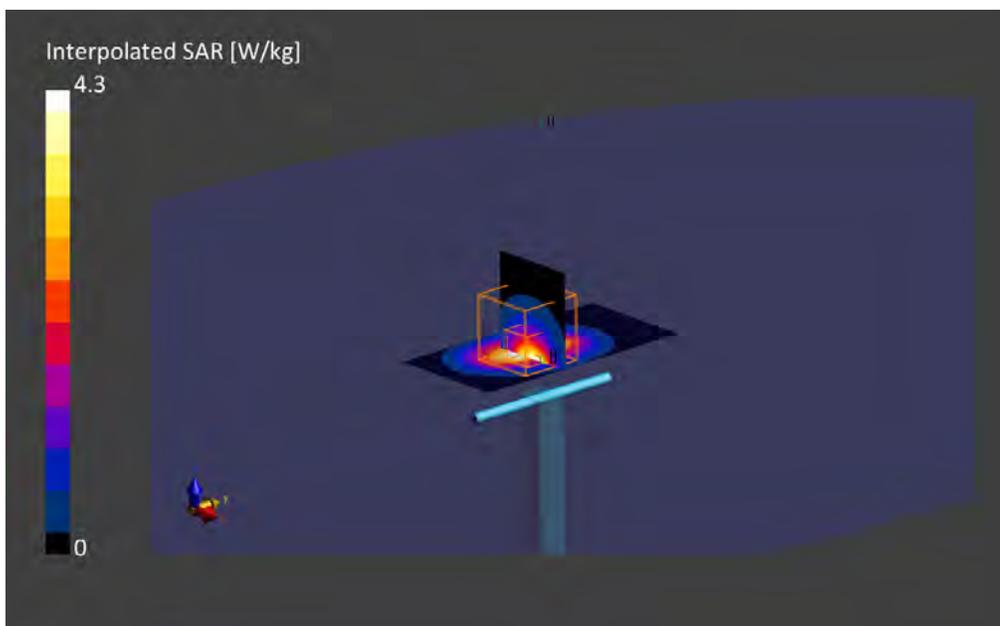

43. System Check Body Liquid 2600MHz – 2022-04-21 – System 2

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
D2600MHz, SPEAG	50.0 x 10.0 x 8.0	1100	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		0--	2600.0, 0	7.24	2.06	51.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MBBL-600-6000, 2022-Apr-20	EX3DV4 - SN7604, 2021-08-16	DAE4 Sn1703, 2022-04-28

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-04-21, 08:27	2022-04-21, 08:33
psSAR 1g [W/kg]	2.58	2.63
psSAR 10g [W/kg]	1.14	1.17
Power Drift [dB]	-0.02	-0.09
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		81.0
Dist 3dB Peak [mm]		8.2

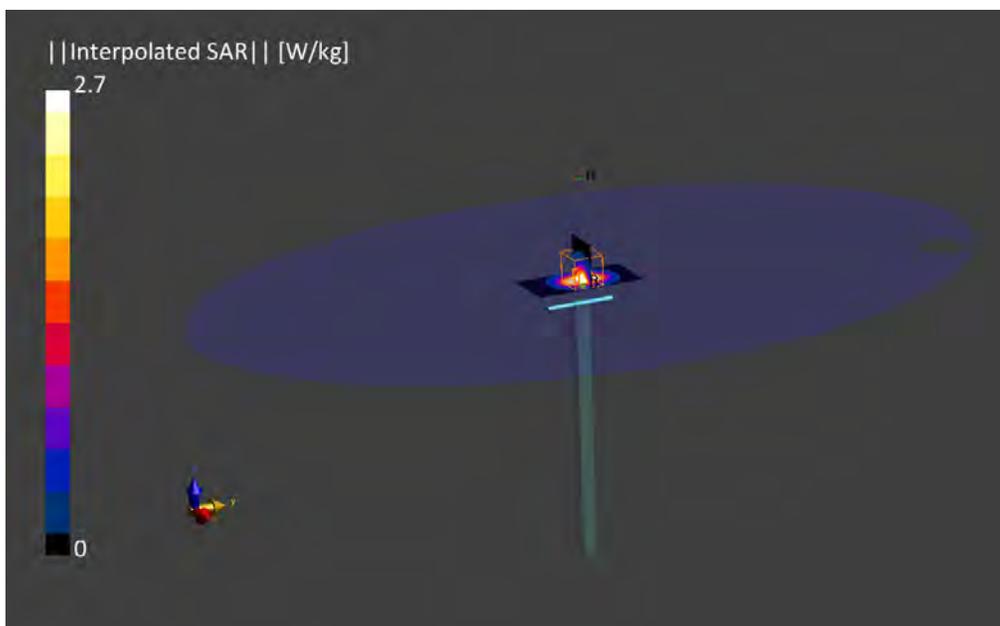

44. System Check Body Liquid 2600MHz – 2022-06-01 – System 2

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
D2600MHz, SPEAG	50.0 x 10.0 x 8.0	1100	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		, 0--	2600.0, 0	7.3	2.09	50.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MBBL-600-6000, 2022-May-04	EX3DV4 - SN7604, 2021-08-16	DAE4 Sn1703, 2022-04-28

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-06-01, 13:20	2022-06-01, 13:27
psSAR1g [W/Kg]	2.53	2.65
psSAR10g [W/Kg]	1.10	1.19
Power Drift [dB]	0.02	0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		82.7
Dist 3dB Peak [mm]		8.0

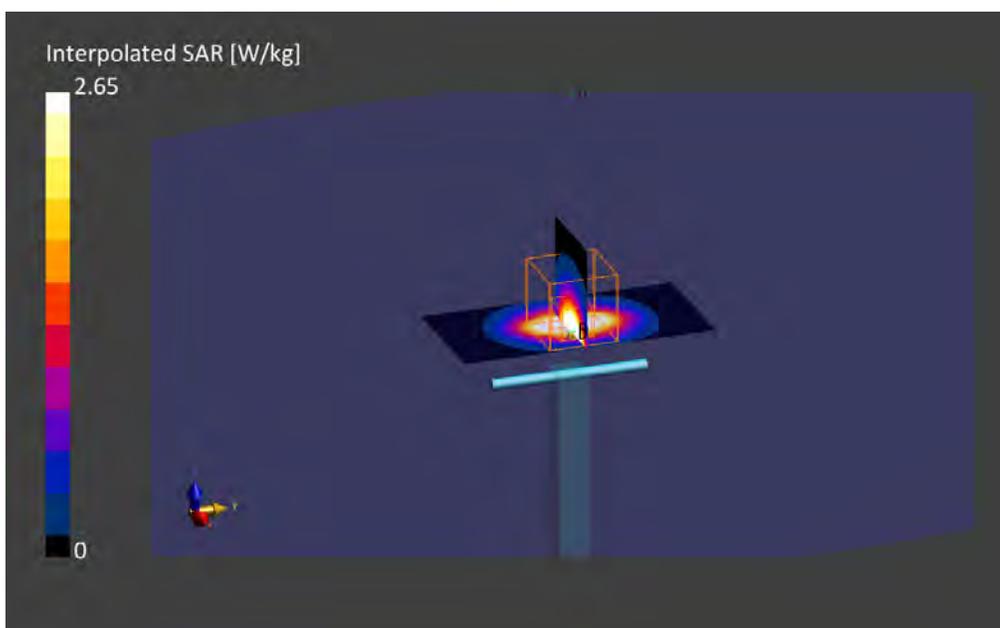

45. System Check Body Liquid 2600MHz – 2022-17-05 – System 4

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
D2600MHz, SPEAG	50.0 x 10.0 x 8.0	1100	Validation Dipole

Exposu Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,	,	0--	2600.0, 0	7.3	2.12	52.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2124	MABL-600-6000, 2022-May-16	EX3DV4 - SN7455, 2022-03-21	DAE4 Sn1517, 2021-03-11

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-05-17, 15:31	2022-05-17, 15:39
psSAR1g [W/Kg]	2.44	2.48
psSAR10g [W/Kg]	1.08	1.12
Power Drift [dB]	-0.02	0.15
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		81.5
Dist 3dB Peak [mm]		8.9

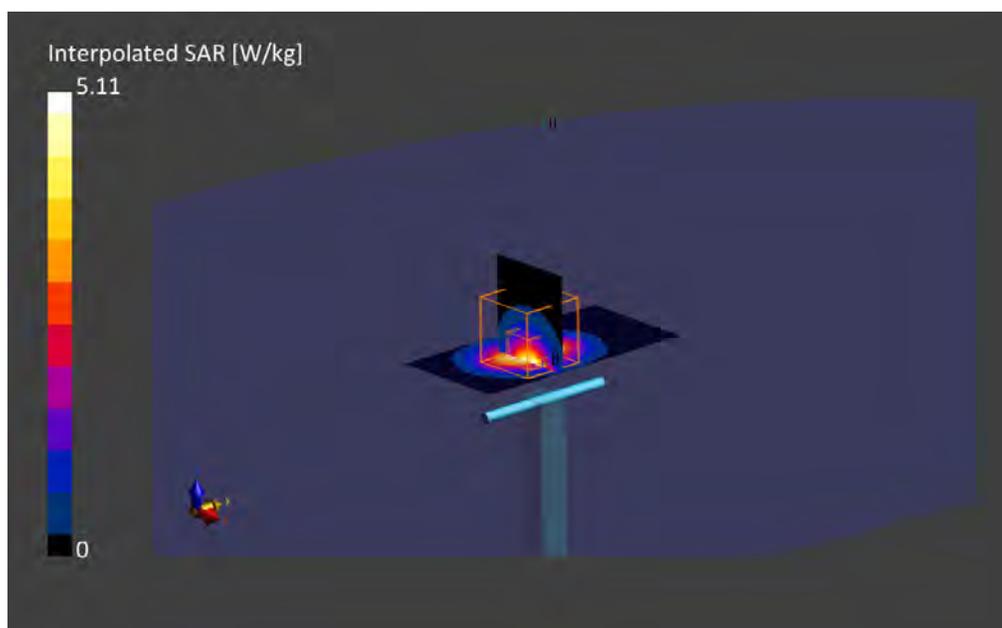

46. System Check Body Liquid 2600MHz – 2022-19-05 – System 4

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
Dipole 2600MHz, SPEAG	50.0 x 10.0 x 20.0	1100	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		0--	2600.0, 0	7.3	2.15	52.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2124	MBBL-600-6000, 2022-May-19	EX3DV4 - SN7455, 2022-03-21	DAE4 Sn1517, 2021-03-11

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-05-19, 15:28	2022-05-19, 15:35
psSAR1g [W/Kg]	2.45	2.52
psSAR10g [W/Kg]	1.08	1.14
Power Drift [dB]	-0.00	0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		81.6
Dist 3dB Peak [mm]		8.9

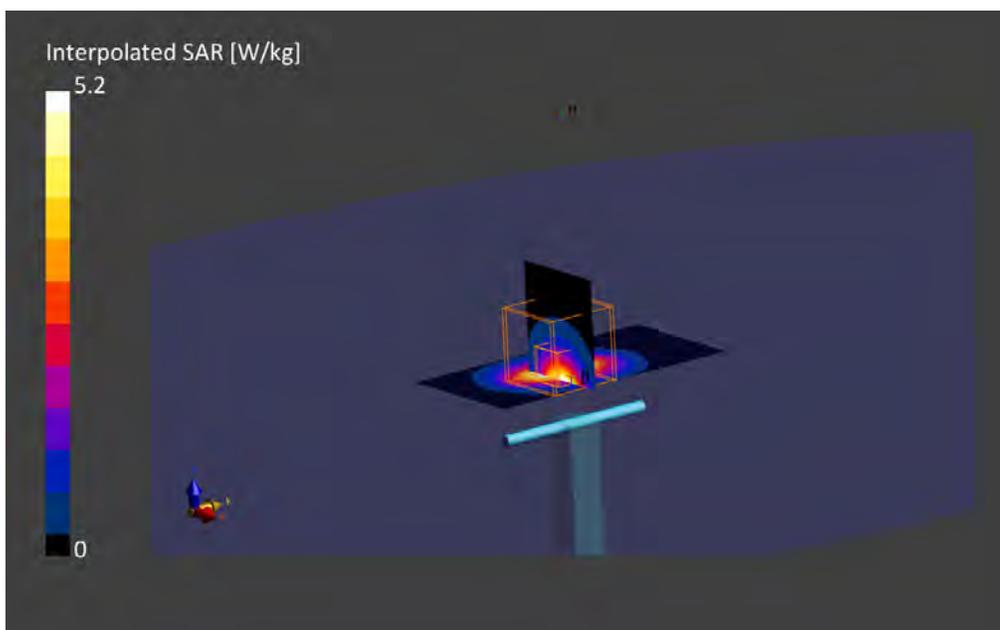

47. System Check Body Liquid 3700MHz – 2022-06-14 - System2

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
Dipole 3700MHz, SPEAG	50.0 x 10.0 x 17.0	1093	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		0--	3700.0, 0	6.07	3.24	51.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) -	MBBL-600-6000, 2022-Jun-14	EX3DV4 - SN7455, 2022-03-21	DAE4 Sn1703, 2022-04-28

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	28.0 x 28.0 x 28.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-06-14, 11:18	2022-06-14, 11:25
psSAR1g [W/kg]	3.07	2.98
psSAR10g [W/kg]	1.14	1.14
Power Drift [dB]	-0.01	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		76.6
Dist 3dB Peak [mm]		8.5

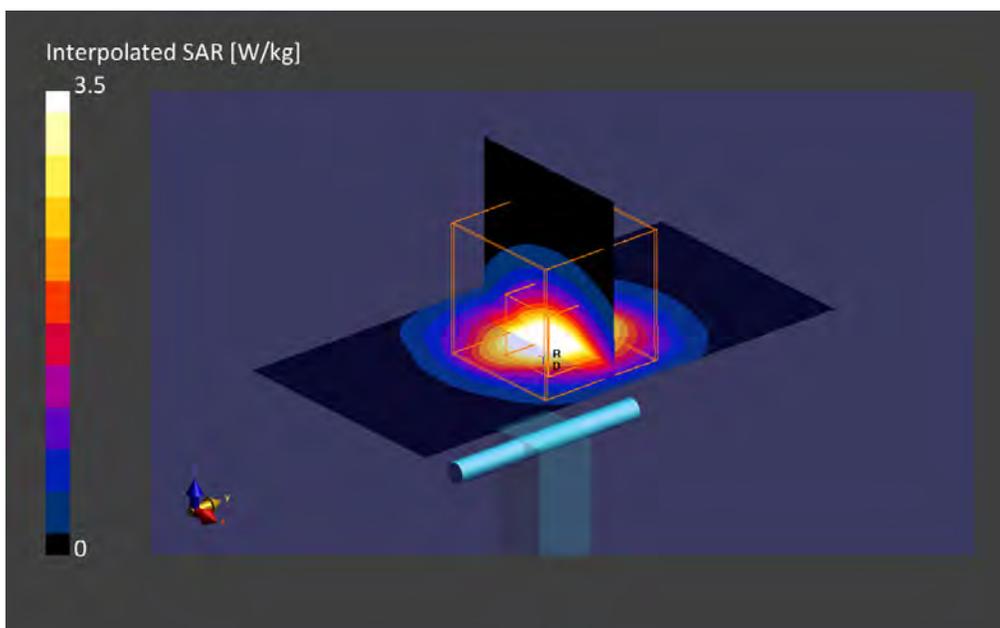

48. System Check Body Liquid 3700MHz – 2022-17-05 – System 4

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
Dipole 3700MHz, SPEAG	50.0 x 10.0 x 20.0	1093	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,	,	0--	3700.0, 0	6.13	3.25	50.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2124	MABL-600-6000, 2022-May-16	EX3DV4 - SN7455, 2022-03-21	DAE4 Sn1517, 2021-03-11

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	28.0 x 28.0 x 28.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-05-17, 15:03	2022-05-17, 15:11
psSAR1g [W/Kg]	2.81	2.90
psSAR10g [W/Kg]	1.05	1.09
Power Drift [dB]	0.09	-0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		76.3
Dist 3dB Peak [mm]		8.0

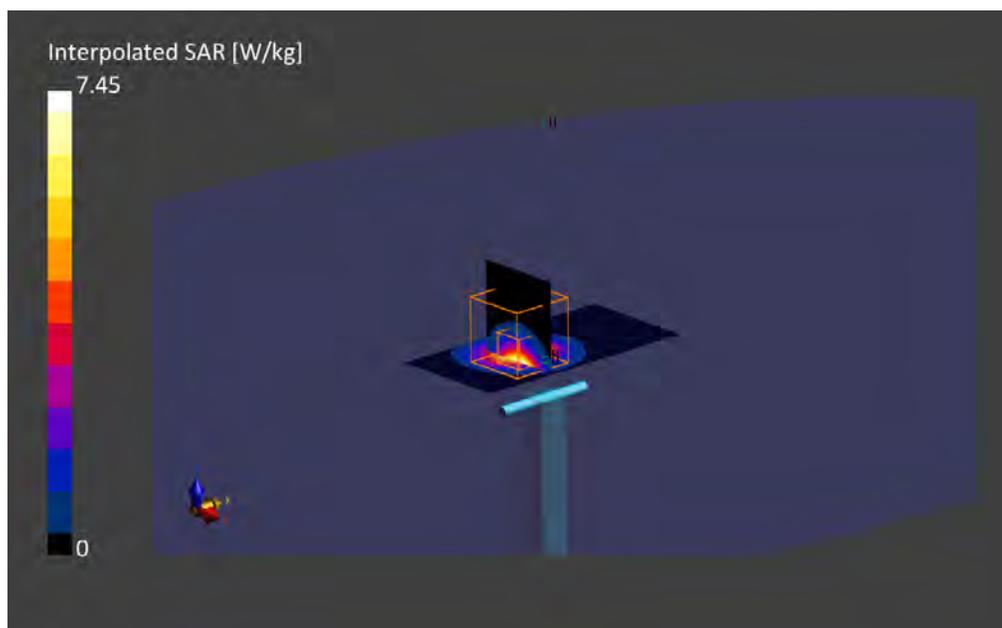

49. System Check Body Liquid 3700MHz – 2022-19-05 – System 4

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
Dipole 3700MHz, SPEAG	50.0 x 10.0 x 20.0	1093	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		, 0--	3700.0, 0	6.13	3.29	50.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2124	MBBL-600-6000, 2022-May-19	EX3DV4 - SN7455, 2022-03-21	DAE4 Sn1517, 2021-03-11

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	28.0 x 28.0 x 28.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results


	Area Scan	Zoom Scan
Date	2022-05-19, 14:45	2022-05-19, 14:53
psSAR1g [W/Kg]	2.88	3.07
psSAR10g [W/Kg]	1.06	1.15
Power Drift [dB]	0.00	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		76.3
Dist 3dB Peak [mm]		8.0

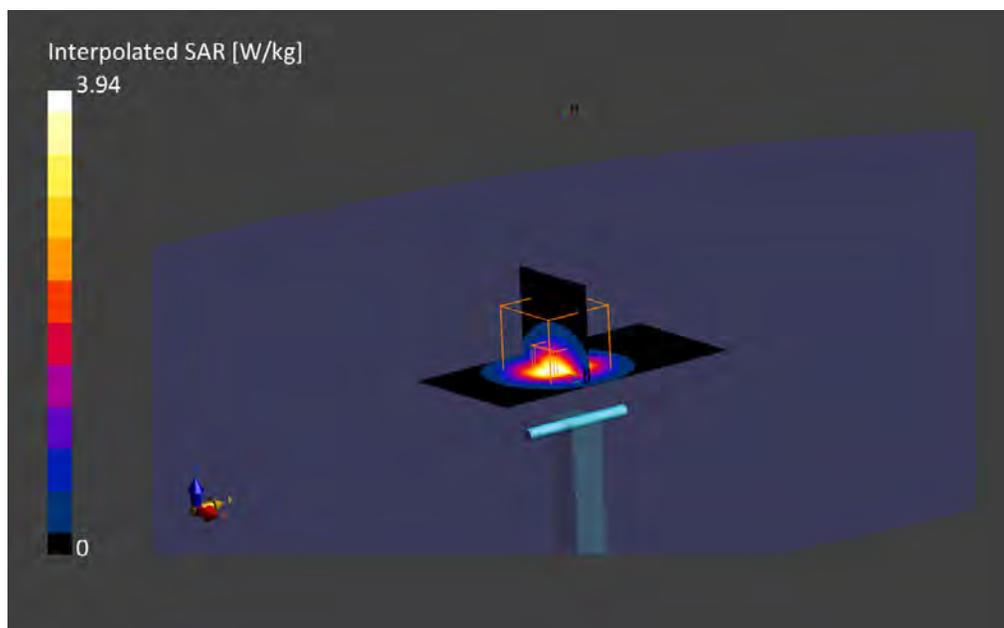

Annex D. TSL Dielectric Parameters


D.1 Body 600MHz-900MHz SAR System 2

Freq. (MHz)	Target		2022-04-20	2022-05-30	2022-06-14	Measured		
	ϵ' (F/m)	σ (S/m)	ϵ'_1 (F/m)	σ_1 (S/m)	ϵ'_2 (F/m)	σ_2 (S/m)	ϵ'_3 (F/m)	σ_3 (S/m)
	600.0	56.12	0.95	54.03	0.86	56.09	0.89	53.1
650.0	55.92	0.96	53.82	0.87	55.89	0.91	52.88	0.89
700.0	55.73	0.96	53.63	0.89	55.72	0.93	52.69	0.9
750.0	55.53	0.96	53.48	0.91	55.58	0.94	52.53	0.92
800.0	55.34	0.97	53.36	0.92	55.46	0.96	52.39	0.94
850.0	55.15	0.99	53.24	0.94	55.35	0.98	52.27	0.96
900.0	55.0	1.05	53.16	0.96	55.26	1.0	52.17	0.97

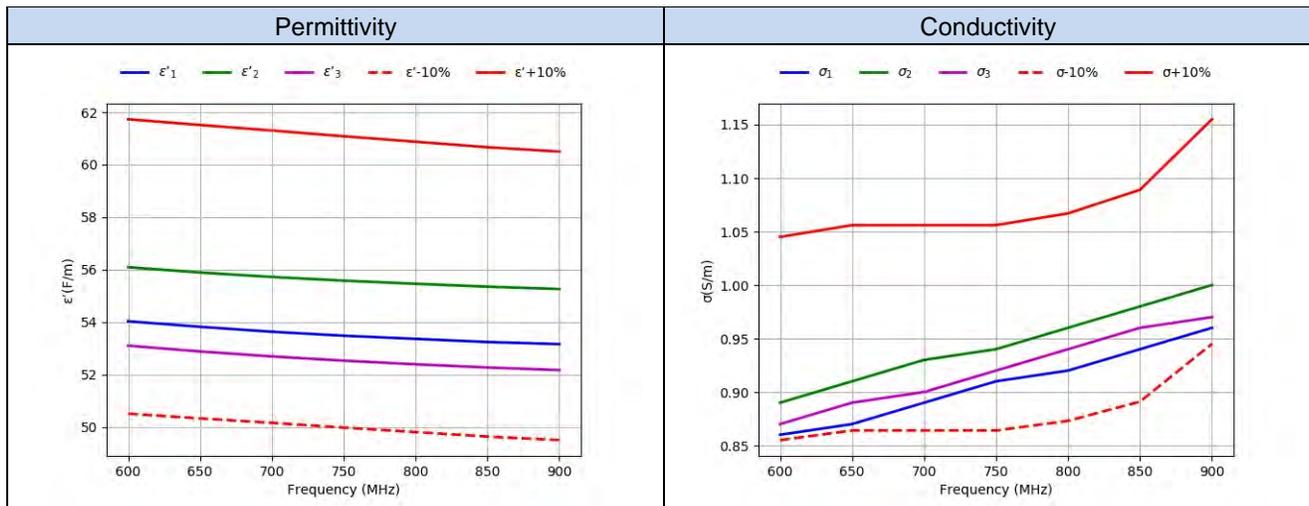


D.2 Body 600MHz-950MHz – System 4

Freq. (MHz)	Target		2022-05-16		2022-06-13	
	Target		Measured		Measured	
	ϵ' (F/m)	σ (S/m)	$\epsilon'1$ (F/m)	$\sigma1$ (S/m)	$\epsilon'2$ (F/m)	$\sigma2$ (S/m)
600.0	56.12	0.95	55.76	0.89	55.32	0.86
610.0	56.08	0.95	55.72	0.89	55.28	0.86
620.0	56.04	0.95	55.68	0.89	55.25	0.87
630.0	56.0	0.95	55.63	0.9	55.21	0.87
640.0	55.96	0.95	55.59	0.9	55.17	0.87
650.0	55.92	0.96	55.55	0.9	55.13	0.87
660.0	55.88	0.96	55.52	0.91	55.1	0.88
670.0	55.84	0.96	55.48	0.91	55.07	0.88
680.0	55.8	0.96	55.44	0.91	55.04	0.88
690.0	55.76	0.96	55.41	0.92	55.01	0.89
700.0	55.73	0.96	55.37	0.92	54.97	0.89
710.0	55.69	0.96	55.34	0.92	54.95	0.89
720.0	55.65	0.96	55.32	0.93	54.92	0.9
730.0	55.61	0.96	55.29	0.93	54.89	0.9
740.0	55.57	0.96	55.26	0.93	54.87	0.9
750.0	55.53	0.96	55.23	0.94	54.84	0.91
760.0	55.49	0.96	55.2	0.94	54.82	0.91
770.0	55.45	0.96	55.18	0.94	54.79	0.91
780.0	55.41	0.97	55.16	0.95	54.77	0.92
790.0	55.38	0.97	55.13	0.95	54.75	0.92
800.0	55.34	0.97	55.11	0.95	54.73	0.92
810.0	55.3	0.97	55.09	0.96	54.71	0.93
820.0	55.26	0.98	55.07	0.96	54.69	0.93
830.0	55.23	0.98	55.05	0.97	54.67	0.94
840.0	55.19	0.98	55.03	0.97	54.64	0.94
850.0	55.15	0.99	55.01	0.97	54.62	0.94
860.0	55.12	1.0	54.99	0.98	54.61	0.95
870.0	55.09	1.01	54.97	0.98	54.59	0.95
880.0	55.06	1.03	54.96	0.98	54.57	0.96
890.0	55.03	1.04	54.94	0.99	54.55	0.96
900.0	55.0	1.05	54.92	0.99	54.53	0.96
910.0	54.99	1.06	54.9	1.0	54.52	0.97
920.0	54.97	1.06	54.89	1.0	54.5	0.97
930.0	54.96	1.07	54.87	1.0	54.48	0.98
940.0	54.95	1.07	54.85	1.01	54.47	0.98
950.0	54.93	1.08	54.84	1.01	54.45	0.98

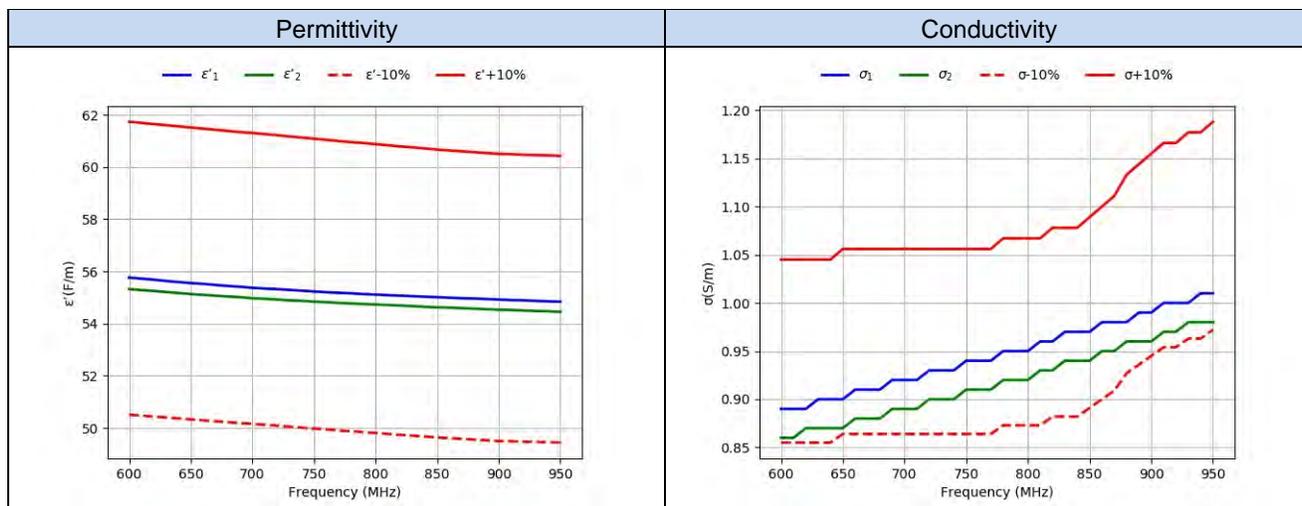


D.3 Body 1700MHz-2350MHz SAR System 2

Freq. (MHz)	Target		2022-04-20		2022-04-25	
			Measured			
	ϵ' (F/m)	σ (S/m)	ϵ'_1 (F/m)	σ_1 (S/m)	ϵ'_2 (F/m)	σ_2 (S/m)
1700.0	53.56	1.46	52.49	1.36	51.58	1.36
1750.0	53.43	1.49	52.43	1.4	51.54	1.39
1800.0	53.3	1.52	52.37	1.43	51.49	1.42
1850.0	53.3	1.52	52.3	1.46	51.43	1.45
1900.0	53.3	1.52	52.22	1.49	51.36	1.48
1950.0	53.3	1.52	52.14	1.52	51.29	1.51
2000.0	53.3	1.52	52.07	1.55	51.22	1.54
2050.0	53.23	1.57	52.02	1.59	51.17	1.57
2100.0	53.17	1.62	51.98	1.62	51.13	1.61
2150.0	53.1	1.66	51.92	1.66	51.08	1.64
2200.0	53.03	1.71	51.85	1.7	51.02	1.68
2250.0	52.97	1.76	51.77	1.74	50.94	1.72
2300.0	52.9	1.81	51.68	1.79	50.86	1.76
2350.0	52.83	1.85	51.59	1.83	50.78	1.8

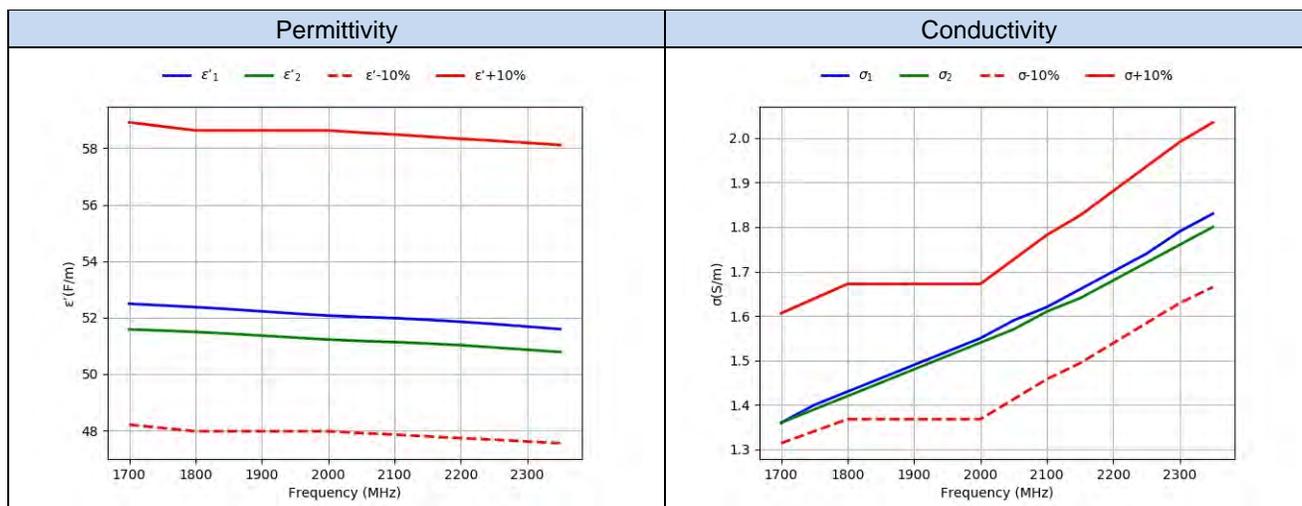


D.4 Body 1700MHz-1950MHz – System 4

Freq. (MHz)	Target		2022-05-09	2022-05-16	2022-05-19			
			Measured					
	ϵ' (F/m)	σ (S/m)	$\epsilon'1$ (F/m)	$\sigma1$ (S/m)	$\epsilon'2$ (F/m)	$\sigma2$ (S/m)	$\epsilon'3$ (F/m)	$\sigma3$ (S/m)
1700	53.56	1.46	51.96	1.49	53.73	1.4	53.97	1.43
1710	53.54	1.46	51.95	1.5	53.72	1.41	53.96	1.44
1720	53.51	1.47	51.94	1.51	53.71	1.42	53.95	1.44
1730	53.48	1.48	51.93	1.51	53.69	1.42	53.94	1.45
1740	53.46	1.48	51.91	1.52	53.68	1.43	53.93	1.46
1750	53.43	1.49	51.9	1.53	53.67	1.44	53.91	1.46
1760	53.41	1.49	51.89	1.53	53.66	1.44	53.9	1.47
1770	53.38	1.5	51.87	1.54	53.64	1.45	53.89	1.48
1780	53.35	1.51	51.86	1.55	53.63	1.46	53.88	1.48
1790	53.33	1.51	51.84	1.55	53.62	1.46	53.87	1.49
1800	53.3	1.52	51.83	1.56	53.61	1.47	53.86	1.5
1810	53.3	1.52	51.81	1.57	53.59	1.48	53.84	1.5
1820	53.3	1.52	51.8	1.57	53.58	1.48	53.83	1.51
1830	53.3	1.52	51.78	1.58	53.57	1.49	53.82	1.51
1840	53.3	1.52	51.77	1.59	53.56	1.5	53.81	1.52
1850	53.3	1.52	51.75	1.6	53.54	1.5	53.8	1.53
1860	53.3	1.52	51.73	1.6	53.53	1.51	53.79	1.53
1870	53.3	1.52	51.72	1.61	53.52	1.52	53.78	1.54
1880	53.3	1.52	51.7	1.61	53.51	1.52	53.76	1.55
1890	53.3	1.52	51.68	1.62	53.49	1.53	53.75	1.56
1900	53.3	1.52	51.67	1.63	53.48	1.54	53.74	1.56
1910	53.3	1.52	51.65	1.64	53.47	1.54	53.73	1.57
1920	53.3	1.52	51.63	1.64	53.45	1.55	53.72	1.58
1930	53.3	1.52	51.61	1.65	53.44	1.56	53.71	1.58
1940	53.3	1.52	51.59	1.65	53.43	1.56	53.7	1.59
1950	53.3	1.52	51.57	1.66	53.42	1.57	53.69	1.6

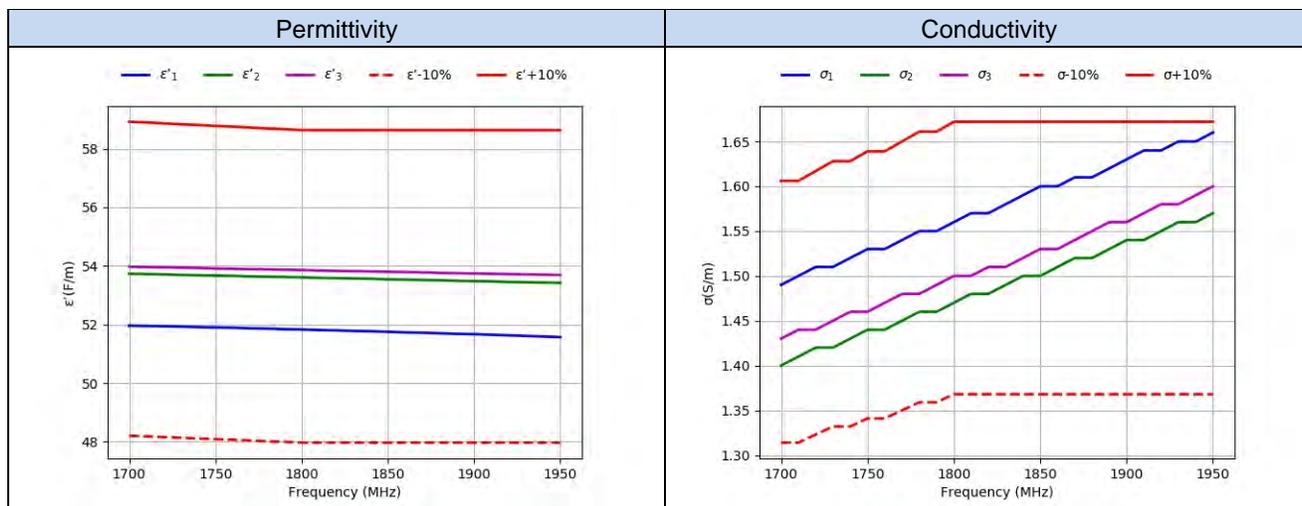


D.5 Body 2500MHz-2700MHz SAR System 2

Freq. (MHz)	Target		2022-04-20	2022-05-30		
			Measured			
	ϵ' (F/m)	σ (S/m)	ϵ'_1 (F/m)	σ_1 (S/m)	ϵ'_2 (F/m)	σ_2 (S/m)
2500.0	52.64	2.02	51.36	1.97	53.12	2.03
2550.0	52.57	2.09	51.27	2.02	53.04	2.07
2600.0	52.51	2.16	51.16	2.06	52.95	2.12
2650.0	52.45	2.23	51.03	2.11	52.86	2.17
2700.0	52.38	2.3	50.9	2.16	52.77	2.21
2500.0	52.64	2.02	51.36	1.97	53.12	2.03
2550.0	52.57	2.09	51.27	2.02	53.04	2.07
2600.0	52.51	2.16	51.16	2.06	52.95	2.12
2650.0	52.45	2.23	51.03	2.11	52.86	2.17

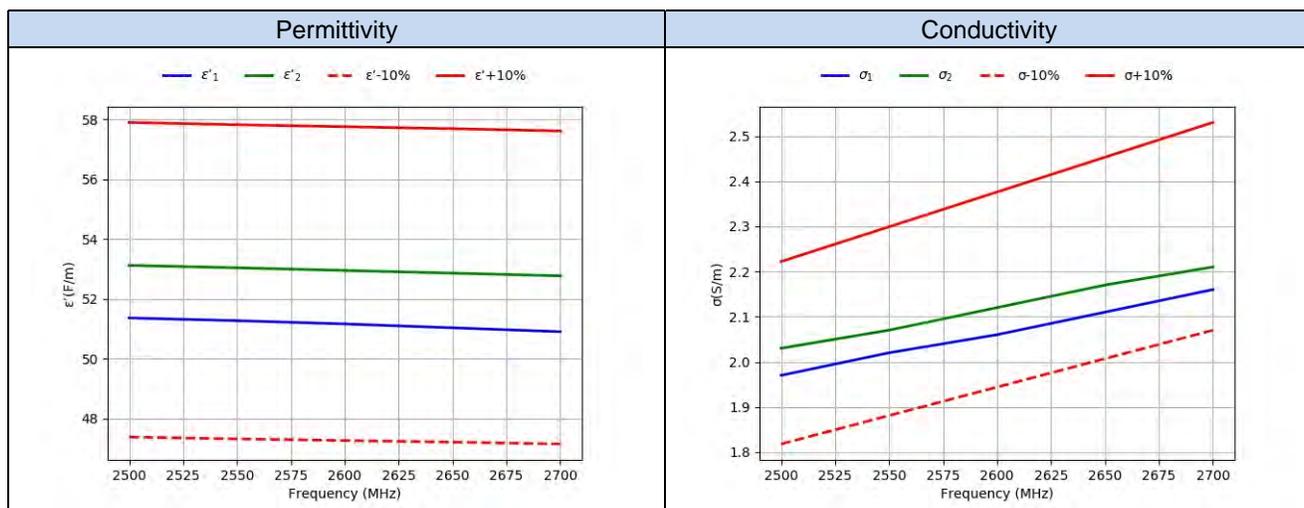


D.6 Body 2300MHz-2700MHz System 4

Freq.(MHz)	Target		2022-05-16		2022-05-19	
			Measured			
	ϵ' (F/m)	σ (S/m)	$\epsilon'1$ (F/m)	$\sigma1$ (S/m)	$\epsilon'2$ (F/m)	$\sigma2$ (S/m)
2300.0	52.9	1.81	53.0	1.84	53.31	1.87
2310.0	52.89	1.82	52.98	1.85	53.29	1.88
2320.0	52.87	1.83	52.97	1.86	53.28	1.89
2330.0	52.86	1.84	52.96	1.87	53.27	1.9
2340.0	52.85	1.84	52.94	1.88	53.25	1.91
2350.0	52.83	1.85	52.93	1.89	53.24	1.91
2360.0	52.82	1.86	52.92	1.9	53.23	1.92
2370.0	52.81	1.87	52.9	1.91	53.21	1.93
2380.0	52.79	1.88	52.89	1.91	53.2	1.94
2390.0	52.78	1.89	52.87	1.92	53.19	1.95
2400.0	52.77	1.9	52.86	1.93	53.17	1.96
2410.0	52.75	1.91	52.85	1.94	53.16	1.97
2420.0	52.74	1.92	52.83	1.95	53.14	1.98
2430.0	52.73	1.93	52.82	1.96	53.13	1.99
2440.0	52.71	1.94	52.8	1.97	53.11	2.0
2450.0	52.7	1.95	52.79	1.98	53.1	2.01
2460.0	52.69	1.96	52.77	1.99	53.08	2.02
2470.0	52.67	1.98	52.76	2.0	53.07	2.02
2480.0	52.66	1.99	52.74	2.01	53.05	2.03
2490.0	52.65	2.01	52.73	2.02	53.04	2.04
2500.0	52.64	2.02	52.71	2.03	53.02	2.05
2510.0	52.62	2.04	52.7	2.03	53.0	2.06
2520.0	52.61	2.05	52.68	2.04	52.99	2.07
2530.0	52.6	2.06	52.66	2.05	52.97	2.08
2540.0	52.59	2.08	52.65	2.06	52.95	2.09
2550.0	52.57	2.09	52.63	2.07	52.93	2.1
2560.0	52.56	2.11	52.61	2.08	52.91	2.11
2570.0	52.55	2.12	52.6	2.09	52.9	2.12
2580.0	52.53	2.13	52.58	2.1	52.88	2.13
2590.0	52.52	2.15	52.56	2.11	52.86	2.14
2600.0	52.51	2.16	52.54	2.12	52.84	2.15
2610.0	52.5	2.18	52.53	2.13	52.82	2.16
2620.0	52.48	2.19	52.51	2.14	52.8	2.17
2630.0	52.47	2.21	52.49	2.15	52.78	2.18
2640.0	52.46	2.22	52.48	2.16	52.76	2.19
2650.0	52.45	2.23	52.46	2.17	52.74	2.2
2660.0	52.43	2.25	52.44	2.18	52.72	2.21
2670.0	52.42	2.26	52.42	2.19	52.7	2.22
2680.0	52.41	2.28	52.4	2.19	52.68	2.23
2690.0	52.39	2.29	52.39	2.2	52.66	2.24
2700.0	52.38	2.3	52.37	2.21	52.64	2.25

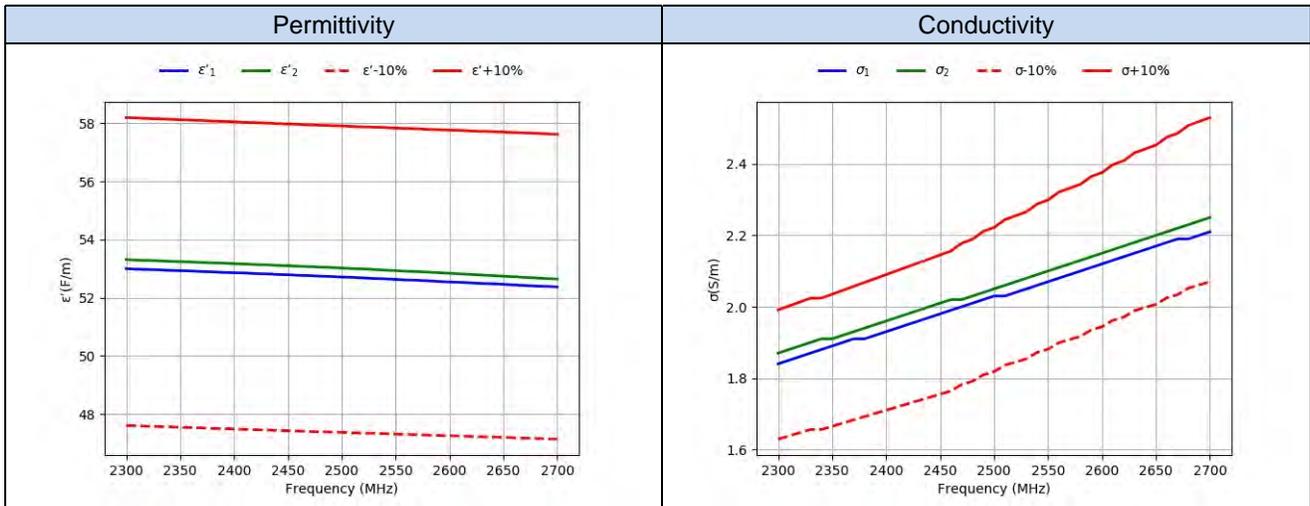

D.7 Body 3500MHz-3900MHz SAR System 2

			2022-06-14	
Target			Measured	
Freq.(MHz)	ϵ' (F/m)	s (S/m)	ϵ' (F/m)	$s1$ (S/m)
3500.0	51.32	3.31	51.3	3.02
3550.0	51.25	3.37	51.22	3.08
3600.0	51.19	3.43	51.14	3.13
3650.0	51.12	3.49	51.05	3.18
3700.0	51.05	3.55	50.97	3.24
3750.0	50.98	3.61	50.9	3.3
3800.0	50.91	3.66	50.82	3.35
3850.0	50.85	3.72	50.75	3.41

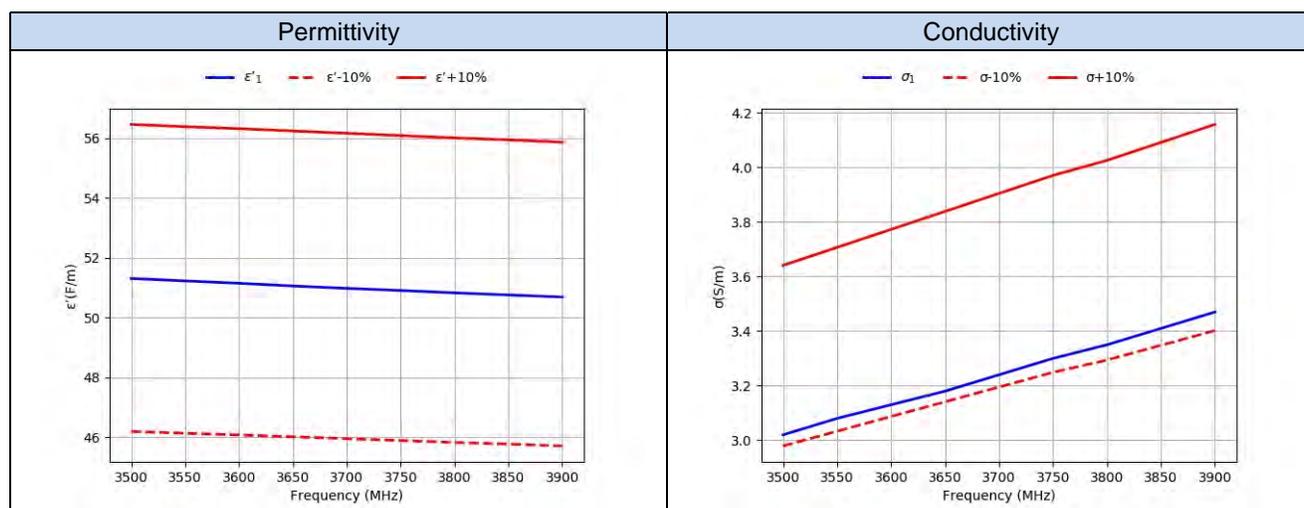

D.8 Body 3500MHz-3900MHz System 4

Freq. (MHz)	Target		2022-05-16		2022-05-19	
			Measured			
	ϵ' (F/m)	σ (S/m)	ϵ'_1 (F/m)	σ_1 (S/m)	ϵ'_2 (F/m)	σ_2 (S/m)
3500.0	51.32	3.31	50.91	3.03	51.09	3.07
3510.0	51.31	3.33	50.89	3.04	51.07	3.08
3520.0	51.29	3.34	50.88	3.05	51.05	3.09
3530.0	51.28	3.35	50.86	3.07	51.04	3.1
3540.0	51.27	3.36	50.85	3.08	51.02	3.11
3550.0	51.25	3.37	50.83	3.09	51.01	3.12
3560.0	51.24	3.38	50.82	3.1	50.99	3.13
3570.0	51.23	3.4	50.8	3.11	50.98	3.14
3580.0	51.21	3.41	50.78	3.12	50.96	3.15
3590.0	51.2	3.42	50.77	3.13	50.94	3.17
3600.0	51.19	3.43	50.75	3.14	50.93	3.18
3610.0	51.17	3.44	50.74	3.15	50.91	3.19
3620.0	51.16	3.45	50.72	3.16	50.9	3.2
3630.0	51.15	3.47	50.71	3.17	50.88	3.21
3640.0	51.13	3.48	50.69	3.19	50.87	3.22
3650.0	51.12	3.49	50.68	3.2	50.85	3.23
3660.0	51.1	3.5	50.67	3.21	50.84	3.25
3670.0	51.09	3.51	50.65	3.22	50.82	3.26
3680.0	51.08	3.52	50.64	3.23	50.81	3.27
3690.0	51.06	3.54	50.62	3.24	50.79	3.28
3700.0	51.05	3.55	50.61	3.25	50.78	3.29
3710.0	51.04	3.56	50.59	3.26	50.76	3.3
3720.0	51.02	3.57	50.58	3.28	50.75	3.31
3730.0	51.01	3.58	50.56	3.29	50.73	3.32
3740.0	51.0	3.59	50.55	3.3	50.72	3.34
3750.0	50.98	3.61	50.53	3.31	50.7	3.35
3760.0	50.97	3.62	50.52	3.32	50.69	3.36
3770.0	50.95	3.63	50.5	3.33	50.67	3.37
3780.0	50.94	3.64	50.49	3.35	50.66	3.38
3790.0	50.93	3.65	50.47	3.36	50.64	3.39
3800.0	50.91	3.66	50.46	3.37	50.63	3.41
3810.0	50.9	3.68	50.44	3.38	50.61	3.42
3820.0	50.89	3.69	50.43	3.39	50.6	3.43
3830.0	50.87	3.7	50.42	3.4	50.59	3.44
3840.0	50.86	3.71	50.4	3.42	50.57	3.45
3850.0	50.85	3.72	50.39	3.43	50.56	3.47
3860.0	50.83	3.73	50.37	3.44	50.54	3.48
3870.0	50.82	3.75	50.36	3.45	50.53	3.49
3880.0	50.81	3.76	50.34	3.46	50.51	3.5
3890.0	50.79	3.77	50.33	3.48	50.5	3.51
3900.0	50.78	3.78	50.31	3.49	50.49	3.53

