



TEST REPORT

EUT Description	WWAN module installed in Notebook PC
Brand Name	HP
Model Name	HSN-I59C
FCC ID / ISED ID	B94HNI59CKL2 / 21374-FM350GL
Date of Test Start/End	2022-12-13 / 2023-01-27
Features	WWAN (5G, LTE, UMTS), WLAN, BT (see section 5)
Description	Platform: HSN-I59C + Antenna Vendors 1 & 2

Applicant	HP Inc.
Address	1501 Page Mill Road, Palo Alto CA 94304 USA
Contact Person	Sam Lin
Telephone / Email	+886 2 37896331 / sam.lin2@hp.com

Reference Standards	FCC 47 CFR Part §2.1093 RSS-102, issue 5 (see section 1)	
RF Exposure Environment	Portable devices - General population/uncontrolled exposure	
	SAR Result	SAR Limit
Maximum SAR Result & Limit	1.14 W/kg (1g)	1.6 W/kg (1g)
Min. test separation distance	0mm to phantom, 9.40mm to antenna edge	

Test Report identification	221123-02.TR01
Revision Control	Rev. 00 This test report revision replaces any previous test report revision (see section 8)

The test results relate only to the samples tested.
Reference to accreditation shall be used only by full reproduction of test report.

_____ Issued by _____ Reviewed by _____

Edgar GARCIA
(SAR Test Engineer)

Adel LOUNES
(Test Lead Engineer)

Intel Corporation S.A.S – WRF Lab
425 rue de Goa – Le Cargo B6 - 06600 Antibes, France
Tel. +33493001400 / Fax +33493001401

Table of Contents

1. Standards, reference documents and applicable test methods	4
2. General conditions, competences and guarantees	4
3. Environmental Conditions	5
4. Test samples	5
5. EUT Features	6
6. Remarks and comments	12
7. Test Verdicts summary	12
8. Document Revision History	12
Annex A. Test & System Description	13
A.1 SAR DEFINITION	13
A.2 SPEAG SAR MEASUREMENT SYSTEM	14
A.2.1 SAR Measurement Setup	14
A.2.2 E-Field Measurement Probe	15
A.2.3 SAM Phantom	15
A.2.4 Flat Phantom	16
A.2.5 Device Positioner	16
A.3 DATA EVALUATION	17
A.4 SYSTEM AND LIQUID CHECK	19
A.4.1 System Check	19
A.4.2 Liquid Check	20
A.5 TEST EQUIPMENT LIST	21
A.5.1 SAR System #3	21
A.5.2 Shared Instrumentation	22
A.5.3 Tissue Simulant Liquid	22
A.6 MEASUREMENT UNCERTAINTY EVALUATION	23
A.7 RF EXPOSURE LIMITS	24
Annex B. Test Results	25
B.1 TEST CONDITIONS	25
B.1.1 Test SAR Test positions relative to the phantom	25
B.2 TEST SIGNAL, OUTPUT POWER AND TEST FREQUENCIES	26
B.3 EVALUATION EXCLUSION AND TEST REDUCTIONS	27
B.4 CONDUCTED POWER MEASUREMENTS TABLET MODE	31
B.4.1 WCDMA/ HSPA/ DC-HSPA	31
B.4.2 LTE	34
B.4.3 LTE UL Carrier Aggregation	65
B.4.4 5G NR (FR1)	66
B.5 TISSUE PARAMETERS MEASUREMENT	78
B.6 SYSTEM CHECK MEASUREMENTS	79
B.7 SAR TEST RESULTS	80
B.7.1 WCDMA	80
B.7.1.1 WCDMA II	80
B.7.1.2 WCDMA IV	80
B.7.1.3 WCDMA V	80
B.7.2 LTE	80
B.7.3 5G NR	85
B.8 SAR Measurement Variability	87

<i>B.9 Simultaneous Transmission SAR Evaluation</i>	88
Annex C. Test System Plots	90
Annex D. TSL Dielectric Parameters	131
D.1 BODY 650MHZ-1950MHZ	131
D.2 BODY 2250MHZ-3800MHZ	132
Annex E. Calibration Certificates	133
Annex F. Photographs	135
F.1 TEST SAMPLES	135
F.2 TEST POSITIONS	137
F.3 ANTENNA HOST PLATFORM LOCATION AND ADJACENT EDGE POSITIONS RELATIVE TO THE BODY	138
F.4 PHANTOM LIQUID LEVEL DURING MEASUREMENTS	139

1. Standards, reference documents and applicable test methods

FCC	<ol style="list-style-type: none"> 1. FCC Title 47 CFR Part §2.1093 – Radiofrequency radiation exposure evaluation: portable devices. 2020-10-01 Edition 2. FCC OET KDB 447498 D04 Interim General RF Exposure Guidance v01– RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices. 3. FCC OET KDB 616217 D04 v01r02 – SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers. 4. FCC OET KDB 865664 D01 v01r04 – SAR Measurement Requirements for 100 MHz to 6 GHz. 5. FCC OET KDB 865664 D02 v01r02 – RF Exposure Compliance Reporting and Documentation Considerations. 6. FCC OET KDB 941225 D05 v02r05 – SAR Evaluation Considerations for LTE Devices. 7. FCC OET KDB 941225 D01 v03r01 – 3G SAR Measurement Procedures. 8. IEEE Std 1528-2013 – IEEE Recommended Practice Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques... 9. TCB workshop November 2017; RF Exposure Procedures (LTE UL/DL Carrier Aggregation SAR) 10. TCB workshop October 2018; RF Exposure Procedures (LTE Inter-Band Uplink Carrier Aggregation –Interim Procedures) 11. TCB workshop November 2019; RF Exposure Policy Updates (5G NR FR1 NSA EN-DC UE SAR Evaluations) 12. TCB workshop November 2019; 5G NR/ EN-DC Compliance Test Configurations
ISED	<ol style="list-style-type: none"> 13. ISED RSS 102, Issue 5 – Radio Frequency (RF) Exposure Compliance of Radio communication Apparatus (All Frequency Bands) 14. ISED RSS-102 Supplementary Procedures SPR-001 SAR testing requirements with regard to bystanders for laptop type computers with antennas built-in on display screen (Laptop Mode / Tablet Mode) 15. ISED Notice 2020-DRS2020 Applicability of IEC/IEEE62209-1528 and IEC 62209 -3 standard 16. ISED Notice 2016-DRS001 – Applicability of latest FCC RF Exposure KDB Procedures and Other Procedures. 17. ISED Notice 2012-DRS0529 – SAR correction for measured conductivity and relative permittivity based on IEC 62209-2 standard. 18. FCC OET KDB 447498 D01 V06 General RF Exposure Guidance v01– RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices. 19. FCC OET KDB 616217 D04 v01r02 – SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers. 20. FCC OET KDB 865664 D01 v01r04 – SAR Measurement Requirements for 100 MHz to 6 GHz. 21. FCC OET KDB 865664 D02 v01r02 – RF Exposure Compliance Reporting and Documentation Considerations. 22. FCC OET KDB 941225 D05 v02r05 – SAR Evaluation Considerations for LTE Devices. 23. FCC OET KDB 941225 D01 v03r01 – 3G SAR Measurement Procedures. 24. IEC/IEEE 62209-1528:2020 Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)

2. General conditions, competences and guarantees

- ✓ Tests performed under FCC standards identified in section 1 are covered by A2LA accreditation.
- ✓ Tests performed under ISED standards identified in section 1 are covered by Cofrac accreditation.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2017 laboratory accredited by the American Association for Laboratory Accreditation (A2LA) with the certificate number 3478.01.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an Accredited Test Firm recognized by the FCC, with Designation Number FR0011.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2017 testing laboratory accredited by the French Committee for Accreditation (Cofrac) with the certificate number 1-6736.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is a Registered Test Site listed by ISED, with ISED #1000Y.
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.

3. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	23.5°C ± 1°C
Humidity	42% ± 20%
Liquid Temperature	20.5°C ± 2°C

4. Test samples

Sample	Control #	Description	Model	Serial #	Date of receipt	Antenna
#01	221123-02.S04	WWAN module installed in Notebook PC	HSN-I59C	C892NQ000Q	2022-12-13	Vendor 1
#02	221123-02.S06	WWAN module installed in Notebook PC	HSN-I59C	C892NQ003S	2022-12-13	Vendor 2

5. EUT Features

The herein information is provided by the customer
 Intel WRF Lab declines any responsibility for the accuracy of the stated customer provided information, especially if it has any impact on the correctness of test results presented in this report.

Brand Name	HP
Model Name	HSN-I59C
Prototype / Production	Production
Host Identification	HSN-I59C
Exposure Conditions	Body worn

Supported radios

The applicable frequency bands and operating modes are identified in the following table.

WWAN:

Mode	Bands	Supported Tx Mode			
		RMC	HSDPA	HSUPA	DC-HSDPA
WCDMA	FDD II (1850.0 – 1910.0 MHz)	✓	✓	✓	✓
	FDD IV (1710.0 – 1755.0 MHz)	✓	✓	✓	✓
	FDD V (824.0 – 849.0 MHz)	✓	✓	✓	✓

FDD/TDD	Bands	Modulations	Bandwidth					
			1.4	3	5	10	15	20
LTE FDD	Band 2 (1850.0 – 1910.0 MHz)	QPSK/16QAM/64QAM/256QAM	✓	✓	✓	✓	✓	✓
	Band 4 (1710.0 – 1755.0 MHz)	QPSK/16QAM/64QAM/256QAM	✓	✓	✓	✓	✓	✓
	Band 5 (824.0 – 849.0 MHz)	QPSK/16QAM/64QAM/256QAM	✓	✓	✓	✓		
	Band 7 (2500.0 – 2570.0 MHz)	QPSK/16QAM/64QAM/256QAM			✓	✓	✓	✓
	Band 12 (699.0 – 716.0 MHz)	QPSK/16QAM/64QAM/256QAM	✓	✓	✓	✓		
	Band 13 (777.0 – 787.0 MHz)	QPSK/16QAM/64QAM/256QAM			✓	✓		
	Band 14 (788.0 – 798.0 MHz)	QPSK/16QAM/64QAM/256QAM			✓	✓		
	Band 17 (704.0 – 716.0 MHz)	QPSK/16QAM/64QAM/256QAM			✓	✓		
	Band 25 (1850.0 – 1915.0 MHz)	QPSK/16QAM/64QAM/256QAM	✓	✓	✓	✓	✓	✓
	Band 26 (814.0 – 849.0 MHz)	QPSK/16QAM/64QAM/256QAM	✓	✓	✓	✓	✓	
	Band 30 (2305.0 – 2315.0 MHz)	QPSK/16QAM/64QAM/256QAM			✓	✓		
	Band 66 (1710.0 – 1780.0 MHz)	QPSK/16QAM/64QAM/256QAM	✓	✓	✓	✓	✓	✓
Band 71 (663.0 – 698.0 MHz)	QPSK/16QAM/64QAM/256QAM			✓	✓	✓	✓	
LTE TDD	Band 38 (2570.0 – 2620.0 MHz)	QPSK/16QAM/64QAM/256QAM			✓	✓	✓	✓
	Band 41 (2496.0 – 2690.0 MHz)	QPSK/16QAM/64QAM/256QAM			✓	✓	✓	✓
	Band 48 (3550.0 – 3700.0 MHz)	QPSK/16QAM/64QAM/256QAM			✓	✓	✓	✓

Bands	Modulation	SCS (KHz)	Bandwidth												
			5	10	15	20	25	30	40	50	60	70	80	90	100
N2 FDD (1850.0 – 1910.0 MHz)	PI/2 BPSK QPSK 16QAM 64QAM 256QAM	15 30	✓	✓	✓	✓									
N5 FDD (824.0 – 849.0 MHz)	PV2 BPSK QPSK 16QAM 64QAM 256QAM	15 30 60	✓	✓	✓	✓									
N7 FDD (2500.0 – 2570.0 MHz)	PV2 BPSK QPSK 16QAM 64QAM 256QAM	15 30	✓	✓	✓	✓									
N25 FDD (1850.0 – 1915 MHz)	PV2 BPSK QPSK 16QAM 64QAM 256QAM	15 30	✓	✓	✓	✓									
N30 FDD (2305.0 – 2315.0 MHz)	PV2 BPSK QPSK 16QAM 64QAM 256QAM	15 30	✓	✓											
N38 TDD (2570.0 – 2620.0 MHz)	PV2 BPSK QPSK 16QAM 64QAM 256QAM	15 30 60	✓	✓	✓	✓									
N41 TDD (2496.0 – 2690.0 MHz)	PV2 BPSK QPSK 16QAM 64QAM 256QAM	15 30				✓			✓	✓	✓		✓	✓	✓
N66 FDD (1710.0 – 1780.0 MHz)	PV2 BPSK QPSK 16QAM 64QAM 256QAM	15 30	✓	✓	✓	✓			✓						
N71 FDD (663.0 – 698.0 MHz)	PV2 BPSK QPSK 16QAM 64QAM 256QAM	15 30	✓	✓	✓	✓									
N77 TDD* (3700.0 – 3980.0 MHz)	PV2 BPSK QPSK 16QAM 64QAM 256QAM	15 30		✓	✓	✓			✓	✓	✓		✓	✓	✓
N78 TDD** (3700.0 – 3800.0 MHz)	PV2 BPSK QPSK 16QAM 64QAM 256QAM	15 30		✓	✓	✓			✓	✓	✓		✓	✓	✓

*FCC limits 5G NR B77 to 3700-3980MHz

** FCC limits 5G NR B78 to 3700-3800MHz

UL carrier aggregation LTE (Inter-Band)		UL carrier aggregation LTE (Intra-band)
2A – 5A	5A – 48A	5B
2A – 12A	5A – 66A	7C
2A – 13A	12A – 30A	38C
2A – 14A	12A – 66A	41C
2A – 48A	13A – 48A	48C
4A – 5A	13A – 66A	66B
4A – 12A	14A – 30A	66C
4A – 13A	14A – 66A	
5A – 7A	25A – 26A	
5A – 30A	48A – 66A	

EN/DC possible combinations	
NR 5G Band	Associated LTE Bands
N2A	5, 12, 13, 14
N5A	2, 7, 30, 66, 48
N66A	5, 12, 13, 48
N41A	2,66,41
N77A	2,5,12,13,14, 30,66, 41
N78A	2, 5, 7, 38

UL carrier aggregation 5G FR1	
n2A – n5A	
n5A – n66A	

WLAN

Mode	UL Freq Range
802.11b/g/n/ax	2.4GHz (2400.0 – 2483.5 MHz)
802.11a/n/ac/ax	5.2GHz (5150.0 – 5250.0 MHz)
	5.3GHz (5250.0 – 5350.0 MHz)
	5.6GHz (5470.0 – 5725.0 MHz)
	5.8GHz (5725.0 – 5850.0 MHz)
802.11ax	6.0GHz (5925.0 – 7125.0 MHz)
Bluetooth v5.2 & BLE	2.4GHz (2400.0 – 2483.5 MHz)

NFC

Model name	XRAV-1
Tx/Rx Freq. Range	13.56MHz
Antenna Type	Loop antenna
Modulation	ASK

Antenna Information & Mapping

Antenna Information "information provided by the applicant"		
The DUT has 2 WWAN TX antenna:		
Transmitter	Ant 5 (TX/RX)	Ant 8 (TX/RX)
Manufacturer	Vendor 1	
Antenna type	PIFA antenna	PIFA antenna
Part number	6036B0305001 (00-2602748450)	6036B0304701 (00-2602748750)
Transmitter	Ant 5 (TX/RX)	Ant 8 (TX/RX)
Manufacturer	Vendor 2	
Antenna type	PIFA antenna	PIFA antenna
Part number	6036B0303501 (81EABL15.G31)	6036B0302501 (81EABL15.G34)
See Annex F for more details on antennas location.		
WWAN Antenna Mapping		
Configuration	Ant 5 (TX/RX)	Ant 8 (TX/RX)
WCDMA	LB / MHB	
LTE	LB / MHB	
		UHB
NR 5G SA	(LB / MHB)	
		UHB
LTE ULCA	LB	MHB /UHB
	MHB	UHB
	B41	UHB
NR 5G ENDC	LB	MHB / B41
	B41	N41
	MHB	B41/N41
	B41/N41	UHB
NR 5G ULCA	MHB	UHB
	LB	MHB
<ul style="list-style-type: none"> • LB: WCDMA FDD V, LTE B5/12/13/14/17/26/71, 5G NR n5/n71 • MHB: WCDMA FDD II/ FDD IV, LTE B2/4/7/25/30/66/38, 5G NR n2/n7/n25/n30/n38/n66 • UHB: LTE: B41/n48; NR 5G: n41/n77/n78 		
<p>Note: For EN-DC mode the 4G and 5G carriers transmit on separate/same antennas. For inter-bands on LTE and NR 5G ULCA the carriers transmit on separate/same antennas.</p>		
Simultaneous Transmission Configurations		
WWAN Main (Ant5) + WWAN Aux (Ant8) + WLAN 2.4GHz Main + BT Aux WWAN Main (Ant5) + WWAN Aux (Ant8) + WLAN 2.4GHz Main + WLAN 2.4GHz Aux WWAN Main (Ant5) + WWAN Aux (Ant8) + WLAN 5/6GHz Main + BT Aux WWAN Main (Ant5) + WWAN Aux (Ant8) + WLAN 5/6GHz Main + WLAN 5/6GHz Aux WWAN Main (Ant5) + WWAN Aux (Ant8) + WLAN 5/6GHz Main + WLAN 5/6GHz Aux + BT Aux		
WLAN transmitter is considered in this report just for the simultaneous transmission evaluation with the WWAN module (See section B.9)		

Additional information

- 5.60-5.65 GHz band (TDWR) is supported by the device
- Band gap is supported by the device
- Two different power settings are implemented in the DUT:
 - Max power for Notebook mode
 - Reduced power for Tablet mode
- The DUT does not support VoLTE, so Head Exposure is not considered for LTE and WCDMA modes. Maximum Power Reduction (MPR) is implemented according to 3GPP, and it is a permanent feature, built-in by design on the tune-up power:

Modulation	Channel bandwidth / #RB						MPR (Db)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≥ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

- According to 3GPP 38-101-1, the UE is allowed to reduce the maximum output power due to higher order modulations and for channel bandwidths that meets both following criteria:
 - Channel bandwidth ≤ 100MHz.
 - Relative channel bandwidth ≤ 4% for TDD bands and ≤ 3% for FDD bands

Maximum power reduction (MPR) for power class 3			
Modulation	MPR (Db)		
	Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM PI/2 BPSK	≤ 3.5 ¹	≤ 1.2 ¹	≤ 0.2 ¹
	0.5 ²	0.5 ²	0 ²
DFT-s-OFDM QPSK	≤ 1		0
DFT-s-OFDM 16 QAM	≤ 2		≤ 1
DFT-s-OFDM 64 QAM	≤ 2.5		
DFT-s-OFDM 256 QAM	4.5		
CP-OFDM QPSK	≤ 3		≤ 1.5
CP-OFDM 16 QAM	≤ 3		≤ 2
CP-OFDM 64 QAM	≤ 3.5		
CP-OFDM 256 QAM	≤ 6.5		

NOTE 1: Applicable for UE operating in TDD mode with PI/2 BPSK modulation and if the IE [P-Boost-BPSK] is set to 1 and 40% or less slots in radio frame are used for UL transmission for bands n40, n77, n78 and n79.
 NOTE 2: Applicable for UE operating in FDD mode, or in TDD mode in bands other than n40, n77, n78 and n79 and if the IE [Pboost-BPSK] is set to 0 and if more than 40% of slots in radio frame are used for UL transmission for bands n40, n77, n78 and n79.

Maximum power reduction (MPR) for power class 2			
Modulation	MPR (Db)		
	Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM PI/2 BPSK	≤ 3.5	≤ 0.5	0
DFT-s-OFDM QPSK	≤ 3.5	≤ 1	0
DFT-s-OFDM 16 QAM	≤ 3.5	≤ 2	≤ 1
DFT-s-OFDM 64 QAM	≤ 3.5	≤ 2.5	
DFT-s-OFDM 256 QAM	≤ 4.5		
CP-OFDM QPSK	≤ 3.5	≤ 3	≤ 1.5
CP-OFDM 16 QAM	≤ 3.5	≤ 3	≤ 2
CP-OFDM 64 QAM	≤ 3.5		
CP-OFDM 256 QAM	≤ 6.5		

The maximum power reduction is applicable on the Tune up tolerance.

The following table indicates the power levels and tolerance for each mode:

Maximum Output power specification + Tune up tolerance

Mode	Tx Ant	Technology	Bands	Class	Nominal (dBm)	Tolerance dB	Lower Tolerance (dBm)	Upper Tolerance (dBm)
Laptop	5	WCDMA/HSPA	FDD II (1850.0 – 1910.0 MHz)	3	16.5	±1	15.5	17.5
	5	WCDMA/HSPA	FDD IV (1710.0 – 1755.0 MHz)	3	16.5	±1	15.5	17.5
	5	WCDMA/HSPA	FDD V (824.0 – 849.0 MHz)	3	20.5	±1	19.5	21.5
	5	LTE	B2 (1850.0 – 1910.0 MHz)	3	16.5	±1	15.5	17.5
	5	LTE	B4 (1710.0 – 1755.0 MHz)	3	16.5	±1	15.5	17.5
	5	LTE	B5 (824.0 – 849.0 MHz)	3	20.5	±1	19.5	21.5
	5	LTE	B7 (2500.0 – 2570.0 MHz)	3	15.0	±1	14.0	16.0
	5	LTE	B12 (699.0 – 716.0 MHz)	3	21.0	±1	20.0	22.0
	5	LTE	B13 (777.0 – 787.0 MHz)	3	21.0	±1	20.0	22.0
	5	LTE	B14 (788.0 – 798.0 MHz)	3	20.5	±1	19.5	21.5
	5	LTE	B17 (704.0 – 716.0 MHz)	3	21.0	±1	20.0	22.0
	5	LTE	B25 (1850.0 – 1915.0 MHz)	3	16.5	±1	15.5	17.5
	5	LTE	B26 (814.0 – 849.0 MHz)	3	20.5	±1	19.5	21.5
	5	LTE	B30 (2305.0 – 2315.0 MHz)	3	16.5	±1	15.5	17.5
	5	LTE	B38 (2570.0 – 2620.0 MHz)	3	15.0	±1	14.0	16.0
	5	LTE	B41 (2496.0 – 2690.0 MHz)	3	15.0	±1	14.0	16.0
	5	LTE	B41-HPUE (2496.0 – 2690.0 MHz)	2	15.0	±1	14.0	16.0
	5	LTE	B66 (1710.0 – 1780.0 MHz)	3	16.5	±1	15.5	17.5
	5	LTE	B71 (663.0 – 698.0 MHz)	3	22.0	±1	21.0	23.0
	8	LTE	B2 (1850.0 – 1910.0 MHz)	3	18.0	±1	17.0	19.0
	8	LTE	B4 (1710.0 – 1755.0 MHz)	3	18.5	±1	17.5	19.5
	8	LTE	B7 (2500.0 – 2570.0 MHz)	3	19.0	±1	18.0	20.0
	8	LTE	B25 (1850.0 – 1915.0 MHz)	3	18.0	±1	17.0	19.0
	8	LTE	B30 (2305.0 – 2315.0 MHz)	3	18.0	±1	17.0	19.0
	8	LTE	B41 (2496.0 – 2690.0 MHz)	3	19.5	±1	18.5	20.5
	8	LTE	B41-HPUE(2496.0 – 2690.0 MHz)	2	19.5	±1	18.5	20.5
	8	LTE	B48 (3550.0 – 3700.0 MHz)	3	17.0	±1	16.0	18.0
	8	LTE	B66 (1710.0 – 1780.0 MHz)	3	18.5	±1	17.5	19.5
	5	5G NR	N2 (1850.0 – 1910.0 MHz)	3	16.5	±1	15.5	17.5
	5	5G NR	N5 (824.0 – 849.0 MHz)	3	20.5	±1	19.5	21.5
	5	5G NR	N7 (2500.0 – 2570.0 MHz)	3	15.0	±1	14.0	16.0
	5	5G NR	N25 (1850.0 – 1915.0 MHz)	3	16.5	±1	15.5	17.5
	5	5G NR	N30 (2305.0 – 2315.0 MHz)	3	16.5	±1	15.5	17.5
	5	5G NR	N38 (2570.0 – 2620.0 MHz)	3	15.0	±1	14.0	16.0
	5	5G NR	N41 (2496.0 – 2690.0 MHz)	3	15.0	±1	14.0	16.0
	5	5G NR	N41-HPUE(2496.0 – 2690.0 MHz)	2	15.0	±1	14.0	16.0
	5	5G NR	N66 (1710.0 – 1780.0 MHz)	3	16.5	±1	15.5	17.5
	5	5G NR	N71 (663.0 – 698.0 MHz)	3	22.0	±1	21.0	23.0
	5	5G NR	N77 (3700.0 – 3980.0 MHz)	3	15.5	±1	14.5	16.5
	5	5G NR	N77-HPUE(3700.0 – 3980.0 MHz)	2	15.5	±1	14.5	16.5
	5	5G NR	N78 (3700.0 – 3800.0 MHz)	3	15.5	±1	14.5	16.5
	5	5G NR	N78-HPUE(3700.0 – 3800.0 MHz)	2	15.5	±1	14.5	16.5
8	5G NR	N2 (1850.0 – 1910.0 MHz)	3	18.0	±1	17.0	19.0	
8	5G NR	N38 (2570.0 – 2620.0 MHz)	3	19.0	±1	18.0	20.0	
8	5G NR	N41 (2496.0 – 2690.0 MHz)	3	19.5	±1	18.5	20.5	
8	5G NR	N41-HPUE(2496.0 – 2690.0 MHz)	2	19.5	±1	18.5	20.5	
8	5G NR	N66 (1710.0 – 1780.0 MHz)	3	18.5	±1	17.5	19.5	
8	5G NR	N77 (3700.0 – 3980.0 MHz)	3	17.5	±1	16.5	18.5	
8	5G NR	N77-HPUE(3700.0 – 3980.0 MHz)	2	17.5	±1	16.5	18.5	
8	5G NR	N78 (3700.0 – 3800.0 MHz)	3	17.0	±1	16.0	18.0	
8	5G NR	N78-HPUE(3700.0 – 3800.0 MHz)	2	17.0	±1	16.0	18.0	

6. Remarks and comments

- Only the plots for the test positions with the highest measured SAR per band/mode are included in Annex C as required per FCC OET KDB 865664 D02, paragraph 2.3.h
- The same conducted power measurements were used on both samples since the same WWAN module has been used on the samples under test during SAR measurements.

7. Test Verdicts summary

The statement of conformity to applicable standards in the table below are based on the measured values, without considering the measurement uncertainties.

Mode	Band (UL)	Highest Reported SAR (1g) (W/kg)	Verdict
WCDMA	FDD II (1850.0 – 1910.0 MHz)	0.50	P
	FDD IV (1710.0 – 1755.0 MHz)	0.77	P
	FDD V (824.0 – 849.0 MHz)	0.78	P
LTE FDD	Band 2 (1850.0 – 1910.0 MHz)	NM	NA
	Band 4 (1710.0 – 1755.0 MHz)	NM	NA
	Band 5 (824.0 – 849.0 MHz)	NM	NA
	Band 7 (2500.0 – 2570.0 MHz)	0.93	P
	Band 12 (699.0 – 716.0 MHz)	0.89	P
	Band 13 (777.0 – 787.0 MHz)	1.14	P
	Band 14 (788.0 – 798.0 MHz)	1.03	P
	Band 17 (704.0 – 716.0 MHz)	NM	NA
	Band 25 (1850.0 – 1915.0 MHz)	1.13	P
	Band 26 (814.0 – 849.0 MHz)	0.96	P
	Band 30 (2305.0 – 2315.0 MHz)	1.02	P
	Band 66 (1710.0 – 1780.0 MHz)	1.00	P
LTE TDD	Band 71 (663.0 – 698.0 MHz)	1.08	P
	Band 38 (2570.0 – 2620.0 MHz)	NM	NA
	Band 41 (2496.0 – 2690.0 MHz)	0.51	P
5G NR FR1 FDD	Band 48 (3550.0 – 3700.0 MHz)	0.27	P
	Band 2 (1850.0 – 1910.0 MHz)	0.79	P
	Band 5 (824.0 – 849.0 MHz)	0.92	P
	Band 7 (2500.0 – 2570.0 MHz)	0.55	P
	Band 25 (1850.0 – 1915.0 MHz)	0.77	P
	Band 30 (2305.0 – 2315.0 MHz)	0.65	P
	Band 66 (1710.0 – 1780.0 MHz)	0.89	P
5G NR FR1 TDD	Band 71 (663.0 – 698.0 MHz)	1.08	P
	Band 38 (2570.0 – 2620.0 MHz)	NM	NA
	Band 41 (2496.0 – 2690.0 MHz)	0.64	P
	Band 77 (3700.0 – 3980.0 MHz)	0.56	P
	Band 78 (3700.0 – 3800.0 MHz)	NM	NA

P: Pass NM: Not Measured
 F: Fail NA: Not Applicable

According to the FCC OET KDB 690783 D01, this is the summary of the values for the Grant Listing:

Exposure Condition	Highest Reported SAR (1g) (W/kg)			
	Equipment Class			
	PCE	DTS	DSS	U-NII
Body Worn	1.14	0.40	0.40	0.40
Simultaneous Tx	Sum-SAR: 2.27 SPLSR : 0.02	Sum-SAR: 1.59	Sum-SAR: 1.59	Sum-SAR: 1.59

Considering the results of the performed test according to FCC 47CFR Part 2.1093 the item under test is following the requested specifications specified in Section1. Standards, reference documents and applicable test methods

8. Document Revision History

Revision #	Modified by	Revision Details
Rev. 00	E. Garcia	First Issue

Annex A. Test & System Description

A.1 SAR Definition

Specific Absorption rate is defined as the time derivative of the incremental energy (dW) absorbed by (dissipated in) and incremental mass (dm) contained in a volume element (dV) of a given density (ρ).

$$SAR = \frac{d}{dt} \cdot \left(\frac{dW}{dm} \right) = \frac{d}{dt} \cdot \left(\frac{dW}{\rho \cdot dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:


σ = Conductivity of the tissue (S/m)
 ρ = Mass density of the tissue (kg/m³)
E = RMS electric field strength (V/m)

Where:

A.2 SPEAG SAR Measurement System

A.2.1 SAR Measurement Setup

The DASY6 system for performing compliance tests consists of the following items:

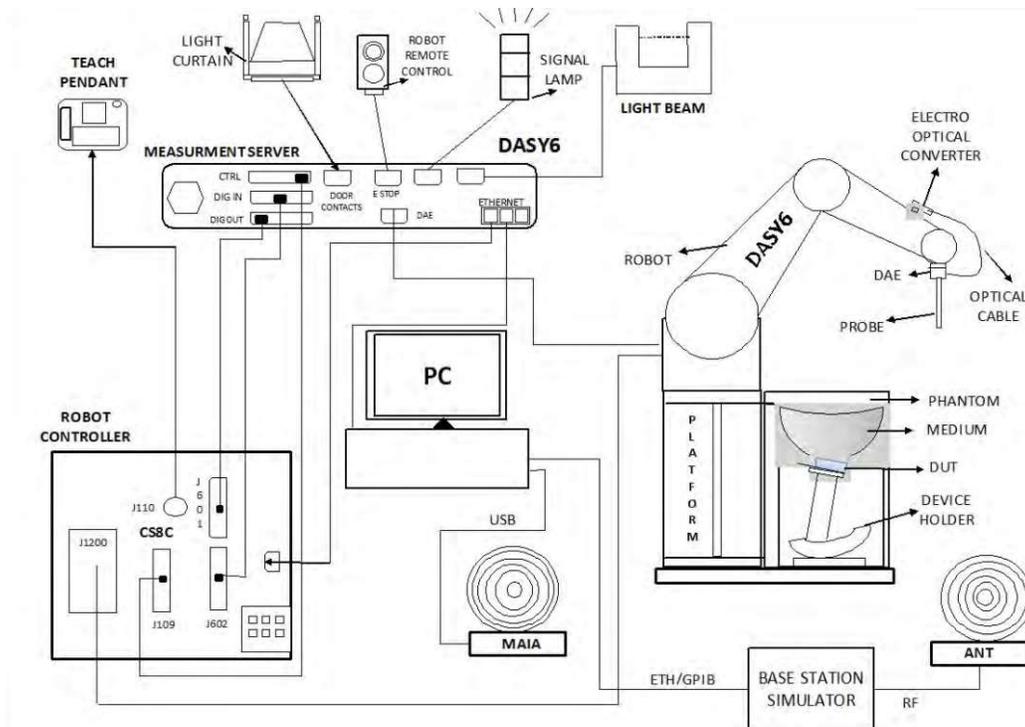

- ✓ A standard high precision 6-axis robot (Stäubli TX/RX family) with controller, teach pendant and software. It includes an arm extension for accommodating the data acquisition electronics (DAE)
- ✓ An isotropic field probe optimized and calibrated for the targeted measurements.
- ✓ A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- ✓ The Electro-optical Converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. The EOC signal is transmitted to the measurement server.
- ✓ The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movements interrupts.
- ✓ The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- ✓ A computer running Win7 professional operating system and the DASY6 software.
- ✓ Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- ✓ The phantom, the device holder, and other accessories according to the targeted measurement.
- ✓ MAIA is a hardware interface (Antenna) used to evaluate the modulation and audio interference characteristics of RF signals.
- ✓ ANT is an ultra-wideband antenna for use with the base station simulators over 698 MHz to 6GHz.
- ✓ The base station simulator is an equipment used for SAR cellular tests to emulate the cellular signals characteristics and behavior between a regular base station and the equipment under test.
- ✓ Tissue simulating liquid.
- ✓ System Validation dipoles.
- ✓ Network emulator.

A.2.2 E-Field Measurement Probe

The probe is constructed using three orthogonal dipole sensors arranged on an interlocking, triangular prism core. The probe has built-in shielding against static charges and is contained within a PEEK cylindrical enclosure material at the tip.



The probe's characteristics are:


Frequency Range	30MHz – 6GHz
Length	337 mm
Probe tip external diameter	2.5 mm
Typical distance between dipoles and the probe tip	1 mm
Axial Isotropy (in human-equivalent liquids)	±0.3 dB
Hemispherical Isotropy (in human-equivalent liquids)	±0.5 dB
Linearity	±0.2 dB
Maximum operating SAR	100 W/kg
Lower SAR detection threshold	0.01 W/kg

A.2.3 SAM Phantom

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left- and right-hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

The phantom's characteristics are:

Material	Vinylester, glass fiber reinforced (VE-GF)
Shell thickness	2 mm ± 0.2 mm
Shell thickness at ERP	6 ± 0.2 mm
Filling volume	25 Liters
Dimensions	Length: 1000mm / Width: 500mm

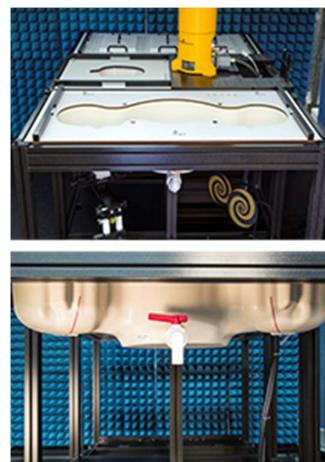


A.2.4 Flat Phantom

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

The phantom's characteristics are:

Material	Vynylester, glass fiber reinforced (VE-GF)
Shell thickness	2 mm ± 0.2 mm
Filling volume	30 Liters approx.
Dimensions	Major axis: 600mm / Minor axis: 400mm

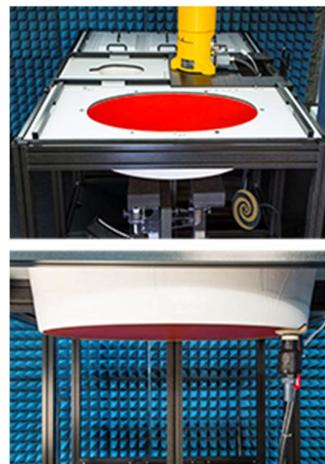

A.2.5 Device Positioner

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of 0.5 mm would produce a SAR uncertainty of 20%. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.



The DASy device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASy device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

A simple but effective and easy-to-use extension for the Mounting Device; facilitates testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.); lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI and other Flat Phantoms.



A.3 Data Evaluation

Power Reference measurement

The robot measures the E field in a specified reference position that can be either the selected section's grid reference point or a user point in this section at 4mm of the inner surface of the phantom, 2mm for frequencies above 3GHz.

Area Scan

Measurement procedures for evaluating SAR from wireless handsets typically start with a coarse measurement grid to determine the approximate location of the local peak SAR values. This is known as the area-scan procedure. The SAR distribution is scanned along the inside surface of one side of the phantom head, at least for an area larger than the projection of the handset and antenna. The distance between the measured points and phantom surface should be less than 8 mm, and should remain constant (with variation less than ± 1 mm) during the entire scan in order to determine the locations of the local peak SAR with sufficient accuracy. The angle between the probe axis and the surface normal line is recommended but not required to be less than 30° . If this angle is larger than 30° and the closest point on the probe-tip housing to the phantom surface is closer than a probe diameter, the boundary effect may become larger and polarization dependent. This additional uncertainty needs to be analyzed and accounted for. To achieve this, modified test procedures and additional uncertainty analyses not described in this recommended practice may be required. The measurement and interpolation point spacing should be chosen such as to allow identification of the local peak locations to within one-half of the linear dimension of a side of the zoom-scan volume. Because a local peak having specific amplitude and steep gradients may produce a lower peak spatial-average SAR compared to peaks with slightly lower amplitude and less steep gradients, it is necessary to evaluate these other peaks as well. However, since the spatial gradients of local SAR peaks are a function of the wavelength inside the tissue-equivalent liquid and the incident magnetic field strength, it is not necessary to evaluate local peaks that are less than 2 dB or more below the global maximum peak. Two-dimensional spline algorithms (Brishoual et al. 2001; Press et al., 1996) are typically used to determine the peaks and gradients within the scanned area. If a peak is found at a distance from the scan border of less than one-half the edge dimension of the desired 1 g or 10 g cube, the measurement area should be enlarged if possible.

Zoom Scan

To evaluate the peak spatial-average SAR values for 1 g or 10 g cubes, fine resolution volume scans, called zoom scans, are performed at the peak SAR locations identified during the area scan. The minimum zoom scan volume size should extend at least 1.5 times the edge dimension of a 1 g cube in all directions from the center of the scan volume, for both 1 g and 10 g peak spatial-average SAR evaluations. Along the phantom curved surfaces, the front face of the volume facing the tissue/liquid interface conforms to the curved boundary, to ensure that all SAR peaks are captured. The back face should be equally distorted to maintain the correct averaging mass. The flatness and orientation of the four side faces are unchanged from that of a cube whose orientation is within $\pm 30^\circ$ of the line normal to the phantom at the center of the cube face next to the phantom surface. The peak local SAR locations that were determined in the area scan (interpolated values) should be used for the centers of the zoom scans. If a scan volume cannot be centered due to proximity of a phantom shape feature, the probe should be tilted to allow scan volume enlargement. If probe tilt is not feasible, the zoom-scan origin may be shifted, but not by more than half of the 1 g or 10 g cube edge dimension.

After the zoom-scan measurement, extrapolations from the closest measured points to the surface, for example along lines parallel to the zoom-scan centerline, and interpolations to a finer resolution between all measured and extrapolated points are performed. Extrapolation algorithm considerations are described in 6.5.3, and 3-D spline methods (Brishoual et al., 2001; Kreyszig, 1983; Press et al., 1996) can be used for interpolation. The peak spatial-average SAR is finally determined by a numerical averaging of the local SAR values in the interpolation grid, using for example a trapezoidal algorithm for the integration (averaging).

In some areas of the phantom, such as the jaw and upper head regions, the angle of the probe with respect to the line normal to the surface may be relatively large, e.g., greater than $\pm 30^\circ$, which could increase the boundary effect error to a larger level. In these cases, during the zoom scan a change in the orientation of the probe, the phantom, or both is recommended but not required for the duration of the zoom scan, so that the angle between the probe axis and the line normal to the surface is within 30° for all measurement points.

Power Drift measurement

The robot re-measures the E-Field in the same reference location measured at the Power Reference. The drift measurement gives the field difference in dB from the first to the last reference reading. This allows a user to monitor the power drift of the device under test that must remain within a maximum variation of $\pm 5\%$.

Post-processing

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE1528 and IEC 62209-1/2 standards. It can be conducted for 1g and 10g.

The software allows evaluations that combine measured data and robot positions, such as:

- ✓ Maximum search
- ✓ Extrapolation
- ✓ Boundary correction
- ✓ Peak search for averaged SAR

Interpolation between the measured points is performed when the resolution of the grid is not fine enough to compute the average SAR over a given mass.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation.


A.4 System and Liquid Check

A.4.1 System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system to guarantee reproducible results.

The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components but indicates situations where the system uncertainty is exceeded due to drift or failure.

In the simplified setup for system check, the EUT is replaced by a calibrated dipole and the power source is replaced by a controlled continuous wave generated by a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the phantom at the correct distance.

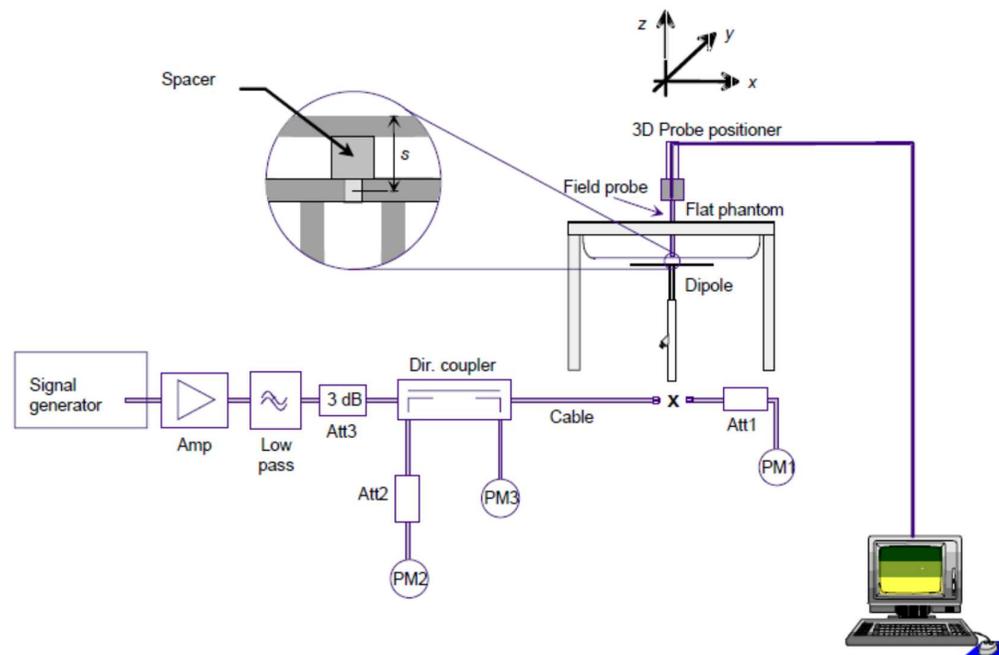

The equipment setup is shown below:

- ✓ Signal Generator
- ✓ Amplifier
- ✓ Directional coupler
- ✓ Power meter
- ✓ Calibrated dipole

First, the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the connector (x) to the system check source. The signal generator is adjusted for the desired forward power at the connector as read by power meter PM1 after attenuation Att1 and also as coupled through Att2 to PM2. After connecting the cable to the source, the signal generator is readjusted for the same reading at power meter PM2.

SAR results are normalized to a forward power of 1W to compare the values with the calibration reports results as described at IEEE 1528 and IEC 62209 standards.

A.4.2 Liquid Check

The dielectric parameters check is done prior to the use of the tissue simulating liquid. The verification is made by comparing the relative permittivity and conductivity to the values recommended by the applicable standards.

The liquid verification was performed using the following test setup:

- ✓ VNA (Vector Network Analyzer)
- ✓ Open-Short-Load calibration kit
- ✓ RF Cable
- ✓ Open-Ended Coaxial probe
- ✓ DAK software tool
- ✓ SAR Liquid
- ✓ De-ionized water
- ✓ Thermometer

These are the target dielectric properties of the tissue-equivalent liquid material as defined in FCC OET KDB 865664 D01.

Frequency (MHz)	Body SAR	
	ϵ_r (F/m)	σ (S/m)
150	61.9	0.80
300	58.2	0.92
450	56.7	0.94
835	55.2	0.97
900	55.0	1.05
1450	54.0	1.30
1800-2000	53.3	1.52
2450	52.7	1.95
3000	52.0	2.73
5800	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and ρ = 1000 kg/m³)

The measurement system implement a SAR error compensation algorithm as documented in IEEE Std 1528-2013 (equivalent to draft standard IEEE P1528-2011) to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters (applied to only scale up the measured SAR, and not downward) so, according to FCC OET KDB 865664 D01, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$.

A.5 Test Equipment List

A.5.1 SAR System #3

ID #	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
086-000	Dosimetric E-Field probe	EX3DV4	7455	SPEAG	2022-03-21	2023-03-21
002-013	Data Acquisition Electronics	DAE4ip	1658	SPEAG	2022-08-19	2023-08-19
002-000	6-axis Robot	TX60 L	F16/55FXA1/A/01	STAÜBLI	n/a	n/a
002-001	Robot Controller	CS8C	F16/55FXA1/C/01	STAÜBLI	n/a	n/a
002-002	Measurement Server	DASY6 P/N: SE UMS 028 BB	1489	SPEAG	n/a	n/a
002-003	Electro-Optical Converter	EOC60	1098	SPEAG	n/a	n/a
002-004	Light Beam Unit	SE UKS 030 AA	-	Di-soric	n/a	n/a
002-005	Oval Flat Phantom	ELI v8.0	2048	SPEAG	n/a	n/a
002-006	Laptop Holder	P/N SM LH1 001 CD	-	SPEAG	n/a	n/a
002-007	Measurement SW	DASY v6.14	9-5DEE27C2	SPEAG	n/a	n/a
458-000	Automation SW	SARA v2.3	-	Intel	n/a	n/a

A.5.2 Shared Instrumentation

ID #	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
123-000	USB Power Sensor	NRP-Z81	102278	R&S	2021-04-13	2023-04-13
124-000	USB Power Sensor	NRP-Z81	102279	R&S	2021-04-13	2023-04-13
135-000	Network Emulator	CMW500	152721	R&S	2022-03-29	2024-03-29
023-000	5G Network Emulator	CMX500	101444	R&S	NA	NA
126-000	Vector Signal Generator	ESG E4438C	MY45092885	Agilent	2021-05-27	2023-05-27
099-000	Liquid measurement SW	DAK-3.5 V2.6.0.5	9-2687B491	SPEAG	n/a	n/a
089-000	Vector Reflectometer	R140 1-Port 14 GHz Analyzer	0190616	Copper Mountain tech	2021-09-02	2023-09-02
071-000	750 MHz System Validation Dipole	D750V3	1136	SPEAG	2021-01-21	2024-01-21
072-000	835 MHz System Validation Dipole	D835V2	4d192	SPEAG	2021-01-21	2024-01-21
073-000	1750 MHz System Validation Dipole	D1750V2	1133	SPEAG	2021-01-14	2024-01-14
074-000	1900 MHz System Validation Dipole	D1900V2	5d197	SPEAG	2021-01-14	2024-01-14
075-000	2300 MHz System Validation Dipole	D2300V2	1046	SPEAG	2021-01-13	2024-01-13
076-000	2600 MHz System Validation Dipole	D2600V2	1100	SPEAG	2021-01-13	2024-01-13
404-000	3700 MHz System Validation Dipole	D3700V2	1093	SPEAG	2022-05-21	2024-05-21
327-000	Temperature & Humidity Logger	RA32E-TH1-RAS	RA32-F0DED9	AVTECH	2021-03-09	2023-03-09
398-000	Thermometer	922	33622932/208	Testo	2021-11-09	2023-11-19
198-000	0.8-21GHz RF amplifier	TVA-82-213A	2004003	Mini-Circuits	2022-02-01	2023-02-26
077-000	Coupler	CD0.5-8-20-30	1251-002	Amd-group	2022-02-01	2023-02-26

A.5.3 Tissue Simulant Liquid

TSL	Manufacturer / Model	Freq Range (MHz)	Main Ingredients
Body WideBand	SPEAG MBBL600-6000V6 Batch 220309-01	600-6000	Ethanediol, Sodium petroleum sulfonate, Hexylene Glycol / 2-Methyl-pentane-2.4-diol, Alkoxylated alcohol

A.6 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the table below with a coverage factor of $k = 2$ to indicate a 95% level of confidence:

SPEAG DASY6 Uncertainty Budget According to IEC/IEEE 62209-1528 (4 MHz - 6 GHz) Including IEEE 1528-2013 and IEC 62209-1/2016, IEC 62209-2/2010								
Symbol	Error Description	Uncert. Value	Prob Dist.	Div.	(ci) 1g	(ci) 10g	Std Unc. (1g)	Std Unc. (10g)
Measurement System Errors								
CF	<i>Probe Calibration</i>	±14.0 %	N	2	1	1	±7.0 %	±7.0 %
CF _{drift}	Probe Calibration Drift	±1.0 %	N	1	1	1	±1.0 %	±1.0 %
LIN	Probe Linearity	±4.7 %	R	√3	1	1	±2.7 %	±2.7 %
BBS	Broadband Signal	±3.0 %	N	2	1	1	±1.5 %	±1.5 %
ISO	<i>Axial Isotropy</i>	±4.7 %	R	√3	0.5	0.5	±1.4 %	±1.4 %
ISO	Hemispherical Isotropy	±9.6 %	R	√3	0.5	0.5	±2.8 %	±2.8 %
DAE	Data Acquisition	±0.3 %	N	1	1	1	±0.3 %	±0.3 %
AMB	RF Ambient	±1.8 %	N	1	1	1	±1.8 %	±1.8 %
Δ _{sys}	Probe Positioning	±0.2 %	N	1	0.33	0.33	±0.1 %	±0.1 %
DAT	Data Processing	±2.3 %	N	1	1	1	±2.3 %	±2.3 %
Phantom and Device Errors								
LIQ(σ)	Conductivity (meas.) _{DAK}	±2.5 %	N	1	0.78	0.71	±2.0 %	±1.8 %
LIQ(Tσ)	Conductivity (temp.) _{BS}	±3.4 %	R	√3	0.78	0.71	±1.5 %	±1.4 %
EPS	Phantom Permittivity	±14.0 %	R	√3	0.25	0.25	±2.0 %	±2.0 %
DAS	Distance DUT - TSL	±2.0 %	N	1	2	2	±4.0 %	±4.0 %
H	Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %
MOD	DUT Modulation _m	±2.4 %	R	√3	1	1	±1.4 %	±1.4 %
TAS	Time-average SAR	±2.6 %	R	√3	1	1	±1.5 %	±1.5 %
RF _{drift}	DUT drift	±5.0 %	N	1	1	1	±2.9 %	±2.9 %
Correction to the SAR results								
C(ε, σ)	Deviation to Target	±1.9 %	N	1	1	0.84	±1.9 %	±1.6 %
Combined Std. Uncertainty							±11.5 %	±11.4 %
Expanded STD Uncertainty							±23.1 %	±22.9 %

A.7 RF Exposure Limits

SAR assessments have been made in line with the requirements of FCC 47 CFR Part 2.1093 on the limitation of exposure of the general population / uncontrolled exposure for portable devices.

Exposure Type	General Population / Uncontrolled Environment
Peak spatial-average SAR (averaged over any 1 gram of tissue)	1.6 W/kg
Whole body average SAR	0.08 W/kg
Peak spatial-average SAR (extremities) (averaged over any 10 grams of tissue)	4.0 W/kg

Annex B. Test Results

The herein test results were performed by:

Test case measurement	Test Personnel
SAR measurement	E. Garcia
Conducted measurement	F. Heurtematte

B.1 Test Conditions

B.1.1 Test SAR Test positions relative to the phantom

The device under test was a Notebook PC, **HSN-I59C**. The device was operated utilizing proprietary software tool (Engineer Tool: 1.0.1.29) and each channel was measured using a communication tester to determine the maximum average power.

The device has 1 power setting:

Laptop mode

See section 5 for details about power values for the configuration
 See Annex F.3 for information about the platform antenna configuration

Laptop mode

Notebook	WWAN Ant 5 TX/RX	WWAN Ant 8 TX/RX
Position	Laptop	Laptop

See F.2 Test position section for more information on the tested positions.

B.2 Test signal, Output power and Test Frequencies

B.2.1 LTE TDD consideration

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

LTE TDD Bands support 3GPP TS 36.211 section 4.2 for Type 2 Frame structure and table 2 for uplink-downlink configurations and table 1 for special subframe configurations

Table 1

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	6592 T _s	(1+X) 2192 T _s	(1+X) 2560 T _s	7680 · T _s	(1+X) 2192 T _s	(1+X) 2560 T _s
1	19760 T _s			20480 T _s		
2	21952 T _s			23040 T _s		
3	24144 T _s			25600 T _s		
4	26336 T _s			7680 T _s		
5	6592 T _s	(2+X) 2192 T _s	(2+X) 2560 T _s	20480 T _s	(2+X) 2192 T _s	(2+X) 2560 T _s
6	19760 T _s			23040 T _s		
7	21952 T _s			12800 T _s		
8	24144 T _s			-		
9	13168 T _s			-		
10	13168 T _s	13150 T _s	12800 T _s	-	-	-

Table2

Uplink-Downlink Config.	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.3%
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.3%
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.3%
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.7%
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.7%
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.7%
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.3%

Calculated duty cycle = Extended cyclic prefix in uplink *(T_S)*# of S + # of U / period

The configuration used for SAR testing was the number 0 which corresponds to the highest duty cycle (Power Class 3)

B.2.2 5G NR TDD consideration

Table3

Subframe Number																			
Radio Frame 0																			
SF0	SF1	SF2	SF3	SF4	SF5	SF6	SF7	SF8	SF9	SF0	SF1	SF2	SF3	SF4	SF5	SF6	SF7	SF8	SF9
0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9
D	s	U	U	S	U	S	U	S	U	S	U	S	U	S	U	S	U	S	U
Radio Frame 1-2																			
SF0	SF1	SF2	SF3	SF4	SF5	SF6	SF7	SF8	SF9	SF0	SF1	SF2	SF3	SF4	SF5	SF6	SF7	SF8	SF9
0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9
S	U	S	U	S	U	S	U	S	U	S	U	S	U	S	U	S	U	S	U
Radio Frame 3																			
SF0	SF1	SF2	SF3	SF4	SF5	SF6	SF7	SF8	SF9	SF0	SF1	SF2	SF3	SF4	SF5	SF6	SF7	SF8	SF9
0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9
S	U	S	U	S	U	S	U	S	U	S	U	S	U	S	U	S	U	S	U

“D”: Full DL slot, “s”: partial slot, “S”: partial slot for PUSCH, “U”: full UL slot

Frame structure and maximal measured duty cycle (91%) for NR 5G FR1 are described in the table 3

B.3 Evaluation Exclusion and Test Reductions

B.3.1 SAR evaluation exclusion

For FCC:

The SAR Test Exclusion Threshold in FCC OET KDB 447498 can be applied to determine SAR test exclusion for adjacent edge configurations. For 100MHz to 6GHz and test separation distances ≤ 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following formula:

$$[(\text{max. power of channel, including tune – up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot \sqrt{f(\text{GHz})} \leq 3.0 \text{ for } 1g \text{ SAR, and } \leq 7.5 \text{ for } 10g \text{ extremity SAR} \quad (1)$$

Where:

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- The values 3.0 and 7.5 are referred to as numeric thresholds

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

For test separation distances > 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined using the following formulas:

$$((\text{Power allowed at numeric threshold for } 50 \text{ mm in (1)}) + (\text{test separation distance} - 50 \text{ mm}) \cdot (f_{\text{MHz}}/150))\text{mW}, \quad (2)$$

for 100MHz to 1500MHz

$$((\text{Power allowed at numeric threshold for } 50 \text{ mm in (1)}) + (\text{test separation distance} - 50 \text{ mm}) \cdot 10)\text{mW}, \quad (3)$$

for 1500MHz and ≤ 6 GHz

In order to evaluate SAR test exclusion for Laptop positions in which the separation distance passes the 50mm limit, equations (2) and (3) are used with the corresponding frequencies for each band, the user distances for the laptop position and with the power values described on Section 5. The table below shows all cellular bands evaluated in this report grouped by frequency band, separation distances and the corresponding Power threshold in mW for each combination (distance and frequency)

Bands	Frequency	Separation distance to the body on mm										Threshold values in mW
		60	70	80	90	100	110	160	170	190	200	
LTE 12,13,14,17,71, NR71	750	223	273	323	373	423	473	723	773	873	923	
FDD V, LTE 5, 26, NR 5	835	220	275	331	387	442	498	776	832	943	999	
FDD IV LTE 4, 66 NR 66	1750	213	313	413	513	613	713	1213	1313	1513	1613	
FDD II, LTE2, 25, NR2,25	1900	209	309	409	509	609	709	1209	1309	1509	1609	
LTE 30, NR 30	2300	199	299	399	499	599	699	1199	1299	1499	1599	
LTE 7,38,41, NR 7,38,41	2600	193	293	393	493	593	693	1193	1293	1493	1593	
LTE 48, NR 77,78	3700	180	280	380	480	580	680	1180	1280	1480	1580	

ISED:

According to RSS-102 section 2.5.1, SAR evaluation is required if the separation distance between the user and/or bystander and the antenna and/or radiating element of the device is less than or equal to 20 cm, except when the device operates at or below the applicable output power level (adjusted for tune-up tolerance) for the specified separation distance defined in Table below:

SAR evaluation — Exemption limits for routine evaluation based on frequency and separation distance					
Frequency	Exemption Limits (mW)				
(MHz)	At separation distance of ≤5 mm	At separation distance of 10 mm	At separation distance of 15 mm	At separation distance of 20 mm	At separation distance of 25 mm
≤300	71 mW	101 mW	132 mW	162 mW	193 mW
450	52 mW	70 mW	88 mW	106 mW	123 mW
835	17 mW	30 mW	42 mW	55 mW	67 mW
1900	7 mW	10 mW	18 mW	34 mW	60 mW
2450	4 mW	7 mW	15 mW	30 mW	52 mW
3500	2 mW	6 mW	16 mW	32 mW	55 mW
5800	1 mW	6 mW	15 mW	27 mW	41 mW

Frequency	Exemption Limits (mW)				
(MHz)	At separation distance of 30 mm	At separation distance of 35 mm	At separation distance of 40 mm	At separation distance of 45 mm	At separation distance of ≥50 mm
≤300	223 mW	254 mW	284 mW	315 mW	345 mW
450	141 mW	159 mW	177 mW	195 mW	213 mW
835	80 mW	92 mW	105 mW	117 mW	130 mW
1900	99 mW	153 mW	225 mW	316 mW	431 mW
2450	83 mW	123 mW	173 mW	235 mW	309 mW
3500	86 mW	124 mW	170 mW	225 mW	290 mW
5800	56 mW	71 mW	85 mW	97 mW	106 mW

Test Exclusion

Antenna	Band Name	Output power		Laptop	Laptop
		Notebook			
		dBm	mW		
WWAN Ant 5 TX/RX	FDD II	17.5	56.2	<50	T
	FDD IV	17.5	56.2	<50	T
	FDD V	21.5	141.3	<50	T
	LTE 2	17.5	56.2	<50	R
	LTE 4	17.5	56.2	<50	R
	LTE 5	21.5	141.3	<50	R
	LTE 7	16.0	39.8	<50	T
	LTE 12	22.0	158.5	<50	T
	LTE 13	22.0	158.5	<50	T
	LTE 14	21.5	141.3	<50	T
	LTE 17	22.0	158.5	<50	R
	LTE 25	17.5	56.2	<50	T
	LTE 26	21.5	141.3	<50	T
	LTE 30	17.5	56.2	<50	T
	LTE 38	16.0	39.8	<50	R
	LTE 41	16.0	39.8	<50	T
	LTE 48	17.5	56.2	<50	T
	LTE 66	17.5	56.2	<50	T
	LTE 71	23.0	200	<50	T
	NR 2	17.5	56.2	<50	R
	NR 5	21.5	141.3	<50	T
	NR 7	16.0	39.8	<50	T
	NR 25	17.5	56.2	<50	T
	NR 30	17.5	56.2	<50	T
	NR 38	16.0	39.8	<50	R
	NR 41	16.0	39.8	<50	T
	NR 66	17.5	56.2	<50	T
	NR 71	23.0	200	<50	T
NR 77	16.5	44.7	<50	T	
NR 78	16.5	44.7	<50	R	

Antenna	Band Name	Output power		Laptop	Laptop
		Notebook			
		dBm	mW		
WWAN Ant 8 TX/RX	LTE 2	19.0	79.4	<50	R
	LTE 4	19.5	89.1	<50	R
	LTE 7	20.0	100.0	<50	T
	LTE 25	19.0	79.4	<50	T
	LTE 30	19.0	79.4	<50	T
	LTE 41	20.5	112.2	<50	T
	LTE 48	18.0	63.1	<50	T
	LTE 66	19.5	89.1	<50	T
	NR 2	19.0	79.4	<50	R
	NR 38	20.0	100.0	<50	R
	NR 41	20.5	112.2	<50	T
	NR 66	19.5	89.1	<50	T
	NR 77	18.5	70.8	<50	T
	NR 78	18.0	63.1	<50	R

T: Tested position
R: Reduced
See Annex F for a more detailed explanation of the separation distance related to the platform.

B.3.2 General SAR test reduction

According to FCC OET KDB 447498, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

WWAN SAR Test reduction

Transmission Mode	SAR test exclusion/reduction
HSDPA	According to FCC OET KDB 941225 D01, SAR evaluation is not required when the maximum average output power is $< \frac{1}{4}$ dB higher than the measured on the corresponding channels without HSDPA, using 12.2kbps RMC, and the maximum SAR for 12.2kbps RMC is < 1.2 W/kg.
HSUPA DC+HSDPA HSPA+	According to FCC OET KDB 941225 D01, SAR evaluation is not required when the maximum average output power is $< \frac{1}{4}$ dB higher than the measured on the corresponding channels without HSUPA, using 12.2kbps RMC, and the maximum SAR for 12.2kbps RMC is < 1.2 W/kg.
LTE	<p>According to FCC OET KDB 941225 D05, testing of 100% RB allocation, higher order modulations or lower BW is not required when these conditions are met:</p> <p>For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg.</p> <p>For each modulation besides QPSK, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.</p> <p>For lower BW, only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.</p> <p>For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M, and L channels may not fully apply</p> <p>The conducted power for the higher order modulations i.e., 64 QAM and 256 QAM has not been measured since the applicable MPR is respectively 2dB and 5dB.</p>
5G NR	According to TCB workshop November 2019; RF Exposure Policy Updates (5G NR FR1 NSA EN-DC UE SAR Evaluations), the FCC OET KDB 941225 D05 rules apply.

B.4 Conducted Power Measurements Tablet Mode

B.4.1 WCDMA/ HSPA/ DC-HSPA

B.4.1.1 WCDMA band II – Antenna 5

Mode	Channel Number	Freq (MHz)	Subset	Average Power Measured (dBm)	Factory Upper Tolerance (dBm)
RMC	9262	1852.4	-	17.07	17.50
	9400	1880	-	17.24	17.50
	9538	1907.6	-	17.41	17.50
HSDPA	9262	1852.4	1	17.18	17.50
			2	17.18	17.50
			3	17.41	17.50
			4	17.14	17.50
	9400	1880	1	17.13	17.50
			2	17.35	17.50
			3	17.21	17.50
			4	17.16	17.50
	9538	1907.6	1	17.36	17.50
			2	17.16	17.50
			3	17.15	17.50
			4	17.30	17.50
HSUPA	9262	1852.4	1	17.16	17.50
			2	17.23	17.50
			3	17.39	17.50
			4	17.12	17.50
			5	17.13	17.50
	9400	1880	1	17.37	17.50
			2	17.23	17.50
			3	17.15	17.50
			4	17.33	17.50
			5	17.19	17.50
	9538	1907.6	1	17.14	17.50
			2	17.29	17.50
			3	17.15	17.50
			4	17.10	17.50
			5	17.33	17.50
DC-HSDPA	9262	1852.4	1	17.07	17.50
			2	17.09	17.50
			3	17.26	17.50
			4	17.14	17.50
	9400	1880	1	17.09	17.50
			2	17.30	17.50
			3	17.10	17.50
			4	17.16	17.50
	9538	1907.6	1	17.30	17.50
			2	17.08	17.50
			3	17.08	17.50
			4	17.28	17.50

B.4.1.2 WCDMA band IV – Antenna 5

Mode	Channel Number	Freq (MHz)	Subset	Average Power Measured (dBm)	Factory Upper Tolerance (dBm)
RMC	1312	1712.4	-	17.21	17.50
	1413	1732.6	-	17.29	17.50
	1513	1752.6	-	17.12	17.50
HSDPA	1312	1712.4	1	17.32	17.50
			2	17.33	17.50
			3	17.38	17.50
			4	17.28	17.50
	1413	1732.6	1	17.33	17.50
			2	17.34	17.50
			3	17.32	17.50
			4	17.34	17.50
	1513	1752.6	1	17.32	17.50
			2	17.26	17.50
			3	17.30	17.50
			4	17.34	17.50
HSUPA	1312	1712.4	1	17.31	17.50
			2	17.30	17.50
			3	17.36	17.50
			4	17.28	17.50
			5	17.33	17.50
	1413	1732.6	1	17.33	17.50
			2	17.33	17.50
			3	17.36	17.50
			4	17.31	17.50
			5	17.29	17.50
	1513	1752.6	1	17.31	17.50
			2	17.35	17.50
			3	17.24	17.50
			4	17.27	17.50
			5	17.29	17.50
DC-HSDPA	1312	1712.4	1	17.31	17.50
			2	17.30	17.50
			3	17.28	17.50
			4	17.23	17.50
	1413	1732.6	1	17.22	17.50
			2	17.24	17.50
			3	17.29	17.50
			4	17.31	17.50
	1513	1752.6	1	17.34	17.50
			2	17.28	17.50
			3	17.27	17.50
			4	17.29	17.50

B.4.1.3 WCDMA band V – Antenna 5

Mode	Channel Number	Freq (MHz)	Subset	Average Power Measured (dBm)	Factory Upper Tolerance (dBm)
RMC	4132	826.4	-	21.23	21.50
	4183	836.6	-	21.22	21.50
	4233	846.6	-	21.15	21.50
HSDPA	4132	826.4	1	21.28	21.50
			2	21.29	21.50
			3	21.17	21.50
			4	21.21	21.50
	4183	836.6	1	21.22	21.50
			2	21.09	21.50
			3	21.27	21.50
			4	21.27	21.50
	4233	846.6	1	21.11	21.50
			2	21.30	21.50
			3	21.29	21.50
			4	21.11	21.50
HSUPA	4132	826.4	1	21.30	21.50
			2	21.27	21.50
			3	21.08	21.50
			4	21.19	21.50
			5	21.23	21.50
	4183	836.6	1	21.14	21.50
			2	21.27	21.50
			3	21.29	21.50
			4	21.09	21.50
			5	21.3	21.50
	4233	846.6	1	21.26	21.50
			2	21.10	21.50
			3	21.27	21.50
			4	21.28	21.50
			5	21.07	21.50
DC- HSDPA	4132	826.4	1	21.2	21.50
			2	21.19	21.50
			3	21.09	21.50
			4	20.49	21.50
	4183	836.6	1	20.49	21.50
			2	20.45	21.50
			3	21.22	21.50
			4	21.26	21.50
	4233	846.6	1	21.15	21.50
			2	20.81	21.50
			3	20.77	21.50
			4	20.66	21.50

B.4.2 LTE

B.4.2.1 LTE band 2 FDD – Antennas 5 & 8

SAR Measurement for LTE Band 2 FDD (Frequency range: 1850 – 1910MHz) is covered by LTE Band 25 FDD (Frequency range: 1850 – 1915MHz) due to overlapping frequency range, same maximum tune-up, and same bandwidth.

B.4.2.2 LTE band 4 FDD – Antennas 5 & 8

SAR Measurement for LTE Band 4 FDD (Frequency range: 1710 – 1755MHz) is covered by LTE Band 66 FDD (Frequency range: 1710 – 1780MHz) due to overlapping frequency range, same maximum tune-up, and same bandwidth.

B.4.2.3 LTE band 5 FDD – Antenna 5

SAR Measurement for LTE Band 5 FDD (Frequency range: 824 – 849MHz) is covered by LTE Band 26 FDD (Frequency range: 814 – 849MHz) due to overlapping frequency range, lower maximum tune-up, and similar bandwidth.

B.4.2.4 LTE band 7 FDD – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 7	20 MHz	20850	2510	1RB Low	1 Pos 0	16.00	0	15.13	16.00	1	14.33
				1RB Mid	1 Pos 50	16.00	0	15.28	16.00	1	14.49
				1RB High	1 Pos 99	16.00	0	15.16	16.00	1	14.36
				50% RB Low	50 Pos 0	16.00	1	14.20	16.00	2	13.20
				50% RB Mid	50 Pos 24	16.00	1	14.25	16.00	2	13.24
				50% RB High	50 Pos 50	16.00	1	14.26	16.00	2	13.30
		100% RB	100 Pos 0	16.00	1	14.23	16.00	2	13.24		
		21100	2535	1RB Low	1 Pos 0	16.00	0	15.27	16.00	1	14.47
				1RB Mid	1 Pos 50	16.00	0	15.42	16.00	1	14.65
				1RB High	1 Pos 99	16.00	0	15.27	16.00	1	14.49
				50% RB Low	50 Pos 0	16.00	1	14.45	16.00	2	13.45
				50% RB Mid	50 Pos 24	16.00	1	14.42	16.00	2	13.41
				50% RB High	50 Pos 50	16.00	1	14.44	16.00	2	13.40
		100% RB	100 Pos 0	16.00	1	14.42	16.00	2	13.39		
		21350	2560	1RB Low	1 Pos 0	16.00	0	15.28	16.00	1	14.49
				1RB Mid	1 Pos 50	16.00	0	15.49	16.00	1	14.71
				1RB High	1 Pos 99	16.00	0	15.32	16.00	1	14.52
				50% RB Low	50 Pos 0	16.00	1	14.51	16.00	2	13.50
	50% RB Mid			50 Pos 24	16.00	1	14.53	16.00	2	13.49	
	50% RB High			50 Pos 50	16.00	1	14.45	16.00	2	13.47	
	100% RB	100 Pos 0	16.00	1	14.50	16.00	2	13.44			
	15 MHz	20825	2507.5	1RB Low	1 Pos 0	16.00	0	15.20	16.00	1	14.48
				1RB Mid	1 Pos 38	16.00	0	15.21	16.00	1	14.53
				1RB High	1 Pos 74	16.00	0	15.19	16.00	1	14.47
				50% RB Low	38 Pos 0	16.00	1	14.16	16.00	2	13.22
				50% RB Mid	38 Pos 19	16.00	1	14.22	16.00	2	13.22
				50% RB High	38 Pos 39	16.00	1	14.25	16.00	2	13.31
		100% RB	75 Pos 0	16.00	1	14.28	16.00	2	13.27		
		21100	2535	1RB Low	1 Pos 0	16.00	0	15.29	16.00	1	14.57
				1RB Mid	1 Pos 38	16.00	0	15.35	16.00	1	14.66
				1RB High	1 Pos 74	16.00	0	15.25	16.00	1	14.56
				50% RB Low	38 Pos 0	16.00	1	14.38	16.00	2	13.41
				50% RB Mid	38 Pos 19	16.00	1	14.35	16.00	2	13.38
				50% RB High	38 Pos 39	16.00	1	14.32	16.00	2	13.35
		100% RB	75 Pos 0	16.00	1	14.40	16.00	2	13.37		
		21375	2562.5	1RB Low	1 Pos 0	16.00	0	15.35	16.00	1	14.63
				1RB Mid	1 Pos 38	16.00	0	15.51	16.00	1	14.78
				1RB High	1 Pos 74	16.00	0	15.36	16.00	1	14.64
				50% RB Low	38 Pos 0	16.00	1	14.50	16.00	2	13.47
	50% RB Mid			38 Pos 19	16.00	1	14.47	16.00	2	13.45	
	50% RB High			38 Pos 39	16.00	1	14.42	16.00	2	13.48	
	100% RB	75 Pos 0	16.00	1	14.52	16.00	2	13.48			
	10 MHz	20800	2505	1RB Low	1 Pos 0	16.00	0	15.23	16.00	1	14.54
				1RB Mid	1 Pos 24	16.00	0	15.27	16.00	1	14.57
				1RB High	1 Pos 49	16.00	0	15.26	16.00	1	14.50
				50% RB Low	25 Pos 0	16.00	1	14.22	16.00	2	13.29
				50% RB Mid	25 Pos 12	16.00	1	14.23	16.00	2	13.30
				50% RB High	25 Pos 25	16.00	1	14.29	16.00	2	13.34
100% RB		50 Pos0	16.00	1	14.30	16.00	2	13.25			
21100		2535	1RB Low	1 Pos 0	16.00	0	15.41	16.00	1	14.73	
			1RB Mid	1 Pos 24	16.00	0	15.44	16.00	1	14.75	
			1RB High	1 Pos 49	16.00	0	15.41	16.00	1	14.67	
			50% RB Low	25 Pos 0	16.00	1	14.45	16.00	2	13.50	
			50% RB Mid	25 Pos 12	16.00	1	14.44	16.00	2	13.51	
			50% RB High	25 Pos 25	16.00	1	14.41	16.00	2	13.50	
100% RB		50 Pos0	16.00	1	14.45	16.00	2	13.39			
21400		2565	1RB Low	1 Pos 0	16.00	0	15.51	16.00	1	14.75	
			1RB Mid	1 Pos 24	16.00	0	15.54	16.00	1	14.83	
			1RB High	1 Pos 49	16.00	0	15.42	16.00	1	14.68	
			50% RB Low	25 Pos 0	16.00	1	14.55	16.00	2	13.60	
	50% RB Mid		25 Pos 12	16.00	1	14.57	16.00	2	13.61		
	50% RB High		25 Pos 25	16.00	1	14.50	16.00	2	13.57		
100% RB	50 Pos0	16.00	1	14.54	16.00	2	13.49				

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM				
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)		
LTE 7	5 MHz	20775	2502.5	1RB Low	1 Pos 0	16.00	0	15.28	16.00	1	14.53		
				1RB Mid	1 Pos 12	16.00	0	15.29	16.00	1	14.55		
				1RB High	1 Pos 24	16.00	0	15.30	16.00	1	14.53		
				50% RB Low	12 Pos 0	16.00	1	14.22	16.00	2	13.22		
				50% RB Mid	12 Pos 6	16.00	1	14.24	16.00	2	13.21		
				50% RB High	12 Pos 11	16.00	1	14.23	16.00	2	13.20		
		21100	2535	100% RB	25 Pos 0	16.00	1	14.23	16.00	2	13.26		
				1RB Low	1 Pos 0	16.00	0	15.39	16.00	1	14.68		
				1RB Mid	1 Pos 12	16.00	0	15.44	16.00	1	14.67		
				1RB High	1 Pos 24	16.00	0	15.42	16.00	1	14.67		
				50% RB Low	12 Pos 0	16.00	1	14.41	16.00	2	13.35		
				50% RB Mid	12 Pos 6	16.00	1	14.36	16.00	2	13.33		
				50% RB High	12 Pos 11	16.00	1	14.33	16.00	2	13.30		
				100% RB	25 Pos 0	16.00	1	14.38	16.00	2	13.37		
				21425	2567.5	1RB Low	1 Pos 0	16.00	0	15.50	16.00	1	14.78
						1RB Mid	1 Pos 12	16.00	0	15.52	16.00	1	14.75
						1RB High	1 Pos 24	16.00	0	15.50	16.00	1	14.71
						50% RB Low	12 Pos 0	16.00	1	14.45	16.00	2	13.41
						50% RB Mid	12 Pos 6	16.00	1	14.46	16.00	2	13.43
						50% RB High	12 Pos 11	16.00	1	14.46	16.00	2	13.44
						100% RB	25 Pos 0	16.00	1	14.51	16.00	2	13.52

B.4.2.5 LTE band 7 FDD – Antenna 8

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 7	20 MHz	20850	2510	1RB Low	1 Pos 0	20.00	0	18.94	20.00	1	18.21
				1RB Mid	1 Pos 50	20.00	0	19.04	20.00	1	18.34
				1RB High	1 Pos 99	20.00	0	18.96	20.00	1	18.25
				50% RB Low	50 Pos 0	20.00	1	17.84	20.00	2	17.00
				50% RB Mid	50 Pos 24	20.00	1	17.87	20.00	2	17.00
				50% RB High	50 Pos 50	20.00	1	17.94	20.00	2	17.05
		100% RB	100 Pos 0	20.00	1	17.89	20.00	2	17.07		
		21100	2535	1RB Low	1 Pos 0	20.00	0	19.00	20.00	1	18.59
				1RB Mid	1 Pos 50	20.00	0	19.14	20.00	1	18.74
				1RB High	1 Pos 99	20.00	0	19.00	20.00	1	18.60
				50% RB Low	50 Pos 0	20.00	1	18.04	20.00	2	17.21
				50% RB Mid	50 Pos 24	20.00	1	18.02	20.00	2	17.19
				50% RB High	50 Pos 50	20.00	1	17.99	20.00	2	17.14
		100% RB	100 Pos 0	20.00	1	18.02	20.00	2	17.17		
		21350	2560	1RB Low	1 Pos 0	20.00	0	19.10	20.00	1	18.35
				1RB Mid	1 Pos 50	20.00	0	19.28	20.00	1	18.47
				1RB High	1 Pos 99	20.00	0	19.06	20.00	1	18.31
				50% RB Low	50 Pos 0	20.00	1	18.10	20.00	2	17.23
	50% RB Mid			50 Pos 24	20.00	1	18.15	20.00	2	17.24	
	50% RB High			50 Pos 50	20.00	1	18.08	20.00	2	17.22	
	100% RB	100 Pos 0	20.00	1	18.06	20.00	2	17.20			
	15 MHz	20825	2507.5	1RB Low	1 Pos 0	20.00	0	18.90	20.00	1	18.48
				1RB Mid	1 Pos 38	20.00	0	18.91	20.00	1	18.54
				1RB High	1 Pos 74	20.00	0	18.88	20.00	1	18.51
				50% RB Low	38 Pos 0	20.00	1	17.81	20.00	2	16.96
				50% RB Mid	38 Pos 19	20.00	1	17.78	20.00	2	16.99
				50% RB High	38 Pos 39	20.00	1	17.83	20.00	2	17.03
		100% RB	75 Pos 0	20.00	1	17.84	20.00	2	17.00		
		21100	2535	1RB Low	1 Pos 0	20.00	0	19.03	20.00	1	18.45
				1RB Mid	1 Pos 38	20.00	0	19.12	20.00	1	18.58
				1RB High	1 Pos 74	20.00	0	19.03	20.00	1	18.49
				50% RB Low	38 Pos 0	20.00	1	18.00	20.00	2	17.20
				50% RB Mid	38 Pos 19	20.00	1	18.00	20.00	2	17.17
				50% RB High	38 Pos 39	20.00	1	17.96	20.00	2	17.09
		100% RB	75 Pos 0	20.00	1	17.99	20.00	2	17.11		
		21375	2562.5	1RB Low	1 Pos 0	20.00	0	19.14	20.00	1	18.27
				1RB Mid	1 Pos 38	20.00	0	19.24	20.00	1	18.40
				1RB High	1 Pos 74	20.00	0	19.14	20.00	1	18.21
				50% RB Low	38 Pos 0	20.00	1	18.09	20.00	2	17.24
	50% RB Mid			38 Pos 19	20.00	1	18.10	20.00	2	17.23	
	50% RB High			38 Pos 39	20.00	1	18.05	20.00	2	17.25	
	100% RB	75 Pos 0	20.00	1	18.10	20.00	2	17.28			
	10 MHz	20800	2505	1RB Low	1 Pos 0	20.00	0	18.93	20.00	1	18.51
				1RB Mid	1 Pos 24	20.00	0	18.96	20.00	1	18.56
				1RB High	1 Pos 49	20.00	0	18.95	20.00	1	18.52
				50% RB Low	25 Pos 0	20.00	1	17.81	20.00	2	17.02
				50% RB Mid	25 Pos 12	20.00	1	17.83	20.00	2	17.05
				50% RB High	25 Pos 25	20.00	1	17.81	20.00	2	17.02
100% RB		50 Pos0	20.00	1	17.85	20.00	2	17.04			
21100		2535	1RB Low	1 Pos 0	20.00	0	19.12	20.00	1	18.12	
			1RB Mid	1 Pos 24	20.00	0	19.14	20.00	1	18.15	
			1RB High	1 Pos 49	20.00	0	19.13	20.00	1	18.11	
			50% RB Low	25 Pos 0	20.00	1	17.99	20.00	2	17.31	
			50% RB Mid	25 Pos 12	20.00	1	18.00	20.00	2	17.27	
			50% RB High	25 Pos 25	20.00	1	17.97	20.00	2	17.23	
100% RB		50 Pos0	20.00	1	18.03	20.00	2	17.21			
21400		2565	1RB Low	1 Pos 0	20.00	0	19.22	20.00	1	18.36	
			1RB Mid	1 Pos 24	20.00	0	19.27	20.00	1	18.37	
			1RB High	1 Pos 49	20.00	0	19.15	20.00	1	18.27	
			50% RB Low	25 Pos 0	20.00	1	18.12	20.00	2	17.29	
	50% RB Mid		25 Pos 12	20.00	1	18.13	20.00	2	17.32		
	50% RB High		25 Pos 25	20.00	1	18.06	20.00	2	17.21		
100% RB	50 Pos0	20.00	1	18.11	20.00	2	17.21				

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM				
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)		
LTE 7	5 MHz	20775	2502.5	1RB Low	1 Pos 0	20.00	0	18.98	20.00	1	18.24		
				1RB Mid	1 Pos 12	20.00	0	19.00	20.00	1	18.27		
				1RB High	1 Pos 24	20.00	0	18.98	20.00	1	18.29		
				50% RB Low	12 Pos 0	20.00	1	17.79	20.00	2	16.99		
				50% RB Mid	12 Pos 6	20.00	1	17.78	20.00	2	16.96		
				50% RB High	12 Pos 11	20.00	1	17.80	20.00	2	16.93		
		21100	2535	100% RB	25 Pos 0	20.00	1	17.79	20.00	2	16.97		
				1RB Low	1 Pos 0	20.00	0	19.18	20.00	1	18.04		
				1RB Mid	1 Pos 12	20.00	0	19.16	20.00	1	18.04		
				1RB High	1 Pos 24	20.00	0	19.17	20.00	1	17.98		
				50% RB Low	12 Pos 0	20.00	1	18.01	20.00	2	17.16		
				50% RB Mid	12 Pos 6	20.00	1	17.99	20.00	2	17.10		
				50% RB High	12 Pos 11	20.00	1	17.92	20.00	2	17.07		
				100% RB	25 Pos 0	20.00	1	17.96	20.00	2	17.17		
				21425	2567.5	1RB Low	1 Pos 0	20.00	0	19.21	20.00	1	18.29
						1RB Mid	1 Pos 12	20.00	0	19.18	20.00	1	18.27
						1RB High	1 Pos 24	20.00	0	19.18	20.00	1	18.25
						50% RB Low	12 Pos 0	20.00	1	18.06	20.00	2	17.23
						50% RB Mid	12 Pos 6	20.00	1	18.03	20.00	2	17.18
						50% RB High	12 Pos 11	20.00	1	18.02	20.00	2	17.12
						100% RB	25 Pos 0	20.00	1	18.04	20.00	2	17.28

B.4.2.6 LTE band 12 FDD – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM			
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	
LTE 12	10 MHz	23095	707.5	1RB Low	1 Pos 0	22.00	0	21.33	22.00	1	20.62	
				1RB Mid	1 Pos 24	22.00	0	21.31	22.00	1	20.61	
				1RB High	1 Pos 49	22.00	0	21.23	22.00	1	20.54	
				50% RB Low	25 Pos 0	22.00	1	20.27	22.00	2	19.34	
				50% RB Mid	25 Pos 12	22.00	1	20.26	22.00	2	19.34	
				50% RB High	25 Pos 24	22.00	1	20.28	22.00	2	19.36	
	100% RB	50 Pos 0	22.00	1	20.31	22.00	2	19.27				
	5 MHz	23035	701.5	1RB Low	1 Pos 0	22.00	0	21.34	22.00	1	20.62	
				1RB Mid	1 Pos 12	22.00	0	21.40	22.00	1	20.65	
				1RB High	1 Pos 24	22.00	0	21.29	22.00	1	20.55	
				50% RB Low	12 Pos 0	22.00	1	20.41	22.00	2	19.38	
				50% RB Mid	12 Pos 6	22.00	1	20.37	22.00	2	19.34	
				50% RB High	12 Pos 11	22.00	1	20.29	22.00	2	19.23	
		100% RB	25 Pos 0	22.00	1	20.35	22.00	2	19.37			
		23095	707.5	1RB Low	1 Pos 0	22.00	0	21.31	22.00	1	20.58	
				1RB Mid	1 Pos 12	22.00	0	21.29	22.00	1	20.55	
				1RB High	1 Pos 24	22.00	0	21.21	22.00	1	20.54	
				50% RB Low	12 Pos 0	22.00	1	20.26	22.00	2	19.25	
				50% RB Mid	12 Pos 6	22.00	1	20.31	22.00	2	19.31	
				50% RB High	12 Pos 11	22.00	1	20.27	22.00	2	19.30	
		100% RB	25 Pos 0	22.00	1	20.29	22.00	2	19.25			
		23155	713.5	1RB Low	1 Pos 0	22.00	0	21.25	22.00	1	20.42	
				1RB Mid	1 Pos 12	22.00	0	21.30	22.00	1	20.50	
				1RB High	1 Pos 24	22.00	0	21.32	22.00	1	20.51	
				50% RB Low	12 Pos 0	22.00	1	20.31	22.00	2	19.28	
				50% RB Mid	12 Pos 6	22.00	1	20.29	22.00	2	19.24	
				50% RB High	12 Pos 11	22.00	1	20.32	22.00	2	19.24	
		100% RB	25 Pos 0	22.00	1	20.30	22.00	2	19.27			
		3 MHz	23025	700.5	1RB Low	1 Pos 0	22.00	0	21.28	22.00	1	20.60
					1RB Mid	1 Pos 7	22.00	0	21.35	22.00	1	20.69
					1RB High	1 Pos 14	22.00	0	21.27	22.00	1	20.62
	50% RB Low				8 Pos 0	22.00	1	20.30	22.00	2	19.35	
	50% RB Mid				8 Pos 4	22.00	1	20.37	22.00	2	19.39	
	50% RB High				8 Pos 7	22.00	1	20.33	22.00	2	19.35	
	100% RB		15 Pos 0	22.00	1	20.33	22.00	2	19.29			
	23095		707.5	1RB Low	1 Pos 0	22.00	0	21.27	22.00	1	20.57	
				1RB Mid	1 Pos 7	22.00	0	21.24	22.00	1	20.55	
				1RB High	1 Pos 14	22.00	0	21.16	22.00	1	20.55	
				50% RB Low	8 Pos 0	22.00	1	20.20	22.00	2	19.27	
				50% RB Mid	8 Pos 4	22.00	1	20.29	22.00	2	19.31	
				50% RB High	8 Pos 7	22.00	1	20.19	22.00	2	19.26	
	100% RB		15 Pos 0	22.00	1	20.23	22.00	2	19.23			
	23165		714.5	1RB Low	1 Pos 0	22.00	0	21.24	22.00	1	20.53	
				1RB Mid	1 Pos 7	22.00	0	21.25	22.00	1	20.58	
				1RB High	1 Pos 14	22.00	0	21.21	22.00	1	20.57	
				50% RB Low	8 Pos 0	22.00	1	20.27	22.00	2	19.29	
				50% RB Mid	8 Pos 4	22.00	1	20.29	22.00	2	19.29	
				50% RB High	8 Pos 7	22.00	1	20.29	22.00	2	19.35	
100% RB	15 Pos 0		22.00	1	20.26	22.00	2	19.21				

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 12	1.4 MHz	23017	699.7	1RB Low	1 Pos 0	22.00	0	21.18	22.00	1	20.33
				1RB Mid	1 Pos 2	22.00	0	21.31	22.00	1	20.45
				1RB High	1 Pos 5	22.00	0	21.26	22.00	1	20.39
				50% RB Low	3 Pos 0	22.00	0	21.13	22.00	1	20.45
				50% RB Mid	3 Pos 1	22.00	0	21.15	22.00	1	20.50
				50% RB High	3 Pos 2	22.00	0	21.18	22.00	1	20.52
				100% RB	6 Pos 0	22.00	1	20.29	22.00	2	19.40
		23095	707.5	1RB Low	1 Pos 0	22.00	0	21.16	22.00	1	20.33
				1RB Mid	1 Pos 2	22.00	0	21.23	22.00	1	20.37
				1RB High	1 Pos 5	22.00	0	21.21	22.00	1	20.31
				50% RB Low	3 Pos 0	22.00	0	21.11	22.00	1	20.44
				50% RB Mid	3 Pos 1	22.00	0	21.12	22.00	1	20.45
				50% RB High	3 Pos 2	22.00	0	21.06	22.00	1	20.43
				100% RB	6 Pos 0	22.00	1	20.26	22.00	2	19.27
		23173	715.3	1RB Low	1 Pos 0	22.00	0	21.14	22.00	1	20.28
				1RB Mid	1 Pos 2	22.00	0	21.20	22.00	1	20.35
				1RB High	1 Pos 5	22.00	0	21.15	22.00	1	20.30
				50% RB Low	3 Pos 0	22.00	0	21.08	22.00	1	20.43
				50% RB Mid	3 Pos 1	22.00	0	21.13	22.00	1	20.46
				50% RB High	3 Pos 2	22.00	0	21.11	22.00	1	20.47
				100% RB	6 Pos 0	22.00	1	20.27	22.00	2	19.36

B.4.2.7 LTE band 13 FDD – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 13	10 MHz	23230	782	1RB Low	1 Pos 0	22.00	0	21.17	22.00	1	20.46
				1RB Mid	1 Pos 24	22.00	0	21.12	22.00	1	20.40
				1RB High	1 Pos 49	22.00	0	20.95	22.00	1	20.25
				50% RB Low	25 Pos 0	22.00	1	20.04	22.00	2	19.09
				50% RB Mid	25 Pos 12	22.00	1	20.07	22.00	2	19.14
				50% RB High	25 Pos 24	22.00	1	20.07	22.00	2	19.13
	5.0 MHz	23230	782	100% RB	50 Pos 0	22.00	1	20.10	22.00	2	19.03
				1RB Low	1 Pos 0	22.00	0	21.14	22.00	1	20.36
				1RB Mid	1 Pos 12	22.00	0	21.16	22.00	1	20.38
				1RB High	1 Pos 24	22.00	0	21.03	22.00	1	20.26
				50% RB Low	12 Pos 0	22.00	1	20.07	22.00	2	19.05
				50% RB Mid	12 Pos 6	22.00	1	20.10	22.00	2	19.07
				50% RB High	12 Pos 11	22.00	1	20.06	22.00	2	19.03
				100% RB	25 Pos 0	22.00	1	20.09	22.00	2	19.07

B.4.2.8 LTE band 14 FDD – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 14	10 MHz	23330	793	1RB Low	1 Pos 0	21.50	0	21.03	21.50	1	20.30
				1RB Mid	1 Pos 24	21.50	0	21.06	21.50	1	20.36
				1RB High	1 Pos 49	21.50	0	21.01	21.50	1	20.30
				50% RB Low	25 Pos 0	21.50	1	20.00	21.50	2	19.10
				50% RB Mid	25 Pos 12	21.50	1	20.03	21.50	2	19.10
				50% RB High	25 Pos 24	21.50	1	20.06	21.50	2	19.15
	5.0 MHz	23330	793	100% RB	50 Pos 0	21.50	1	20.05	21.50	2	19.01
				1RB Low	1 Pos 0	21.50	0	21.03	21.50	1	20.29
				1RB Mid	1 Pos 12	21.50	0	21.11	21.50	1	20.37
				1RB High	1 Pos 24	21.50	0	21.07	21.50	1	20.34
				50% RB Low	12 Pos 0	21.50	1	20.04	21.50	2	19.01
				50% RB Mid	12 Pos 6	21.50	1	20.01	21.50	2	18.96
				50% RB High	12 Pos 11	21.50	1	19.97	21.50	2	18.94
				100% RB	25 Pos 0	21.50	1	20.04	21.50	2	19.05

B.4.2.9 LTE band 17 FDD – Antenna 5

SAR Measurement for LTE Band 17 FDD (Frequency range: 704 – 716MHz) is covered by LTE Band 12 FDD (Frequency range: 699 – 716MHz) due to overlapping frequency range, same maximum tune-up, and same bandwidth.

B.4.2.10 LTE band 25 FDD – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 25	20 MHz	26140	1860.0	1RB Low	1 Pos 0	17.50	0	16.91	17.50	1	16.23
				1RB Mid	1 Pos 50	17.50	0	17.00	17.50	1	16.34
				1RB High	1 Pos 99	17.50	0	16.95	17.50	1	16.14
				50% RB Low	50 Pos 0	17.50	1	16.10	17.50	2	15.05
				50% RB Mid	50 Pos 24	17.50	1	16.09	17.50	2	15.14
				50% RB High	50 Pos 50	17.50	1	16.11	17.50	2	15.04
		100% RB	100 Pos 0	17.50	1	16.10	17.50	2	15.03		
		26365	1882.5	1RB Low	1 Pos 0	17.50	0	17.04	17.50	1	16.08
				1RB Mid	1 Pos 50	17.50	0	17.16	17.50	1	16.23
				1RB High	1 Pos 99	17.50	0	16.97	17.50	1	16.14
				50% RB Low	50 Pos 0	17.50	1	16.06	17.50	2	15.11
				50% RB Mid	50 Pos 24	17.50	1	16.14	17.50	2	15.06
				50% RB High	50 Pos 50	17.50	1	16.07	17.50	2	15.08
		100% RB	100 Pos 0	17.50	1	16.05	17.50	2	15.07		
		26590	1905.0	1RB Low	1 Pos 0	17.50	0	17.05	17.50	1	16.22
				1RB Mid	1 Pos 50	17.50	0	17.18	17.50	1	16.37
				1RB High	1 Pos 99	17.50	0	17.15	17.50	1	16.32
				50% RB Low	50 Pos 0	17.50	1	16.17	17.50	2	15.15
	50% RB Mid			50 Pos 24	17.50	1	16.19	17.50	2	15.18	
	50% RB High			50 Pos 50	17.50	1	16.09	17.50	2	15.07	
	100% RB	100 Pos 0	17.50	1	16.19	17.50	2	15.15			
	15 MHz	26115	1857.5	1RB Low	1 Pos 0	17.50	0	16.94	17.50	1	16.22
				1RB Mid	1 Pos 38	17.50	0	17.00	17.50	1	16.32
				1RB High	1 Pos 74	17.50	0	16.91	17.50	1	16.23
				50% RB Low	38 Pos 0	17.50	1	15.99	17.50	2	14.99
				50% RB Mid	38 Pos 19	17.50	1	15.98	17.50	2	14.99
				50% RB High	38 Pos 39	17.50	1	15.97	17.50	2	14.97
		100% RB	75 Pos 0	17.50	1	16.01	17.50	2	15.03		
		26365	1882.5	1RB Low	1 Pos 0	17.50	0	17.11	17.50	1	16.41
				1RB Mid	1 Pos 38	17.50	0	17.12	17.50	1	16.42
				1RB High	1 Pos 74	17.50	0	16.97	17.50	1	16.30
				50% RB Low	38 Pos 0	17.50	1	16.10	17.50	2	15.11
				50% RB Mid	38 Pos 19	17.50	1	16.12	17.50	2	15.14
				50% RB High	38 Pos 39	17.50	1	16.04	17.50	2	15.04
		100% RB	75 Pos 0	17.50	1	16.10	17.50	2	15.08		
		26615	1907.5	1RB Low	1 Pos 0	17.50	0	17.13	17.50	1	16.41
				1RB Mid	1 Pos 38	17.50	0	17.23	17.50	1	16.50
				1RB High	1 Pos 74	17.50	0	17.24	17.50	1	16.50
				50% RB Low	38 Pos 0	17.50	1	16.20	17.50	2	15.19
	50% RB Mid			38 Pos 19	17.50	1	16.21	17.50	2	15.21	
	50% RB High			38 Pos 39	17.50	1	16.19	17.50	2	15.18	
	100% RB	75 Pos 0	17.50	1	16.22	17.50	2	15.23			
	10 MHz	26090	1855.0	1RB Low	1 Pos 0	17.50	0	17.01	17.50	1	16.28
				1RB Mid	1 Pos 24	17.50	0	17.04	17.50	1	16.33
				1RB High	1 Pos 49	17.50	0	16.96	17.50	1	16.26
				50% RB Low	25 Pos 0	17.50	1	16.02	17.50	2	15.08
				50% RB Mid	25 Pos 12	17.50	1	16.02	17.50	2	15.11
				50% RB High	25 Pos 25	17.50	1	15.97	17.50	2	15.03
100% RB		50 Pos0	17.50	1	16.03	17.50	2	15.01			
26365		1882.5	1RB Low	1 Pos 0	17.50	0	17.18	17.50	1	16.44	
			1RB Mid	1 Pos 24	17.50	0	17.17	17.50	1	16.46	
			1RB High	1 Pos 49	17.50	0	17.11	17.50	1	16.38	
			50% RB Low	25 Pos 0	17.50	1	16.15	17.50	2	15.20	
			50% RB Mid	25 Pos 12	17.50	1	16.17	17.50	2	15.22	
			50% RB High	25 Pos 25	17.50	1	16.11	17.50	2	15.18	
100% RB		50 Pos0	17.50	1	16.17	17.50	2	15.15			
26640		1910.0	1RB Low	1 Pos 0	17.50	0	17.22	17.50	1	16.49	
			1RB Mid	1 Pos 24	17.50	0	17.26	17.50	1	16.50	
			1RB High	1 Pos 49	17.50	0	17.28	17.50	1	16.50	
			50% RB Low	25 Pos 0	17.50	1	16.30	17.50	2	15.38	
	50% RB Mid		25 Pos 12	17.50	1	16.27	17.50	2	15.32		
	50% RB High		25 Pos 25	17.50	1	16.22	17.50	2	15.27		
100% RB	50 Pos0	17.50	1	16.28	17.50	2	15.23				

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE25	5 MHz	26065	1852.5	1RB Low	1 Pos 0	17.50	0	17.06	17.50	1	16.29
				1RB Mid	1 Pos 38	17.50	0	17.08	17.50	1	16.33
				1RB High	1 Pos 74	17.50	0	17.10	17.50	1	16.32
				50% RB Low	38 Pos 0	17.50	1	15.99	17.50	2	14.97
				50% RB Mid	38 Pos 19	17.50	1	15.99	17.50	2	14.94
				50% RB High	38 Pos 39	17.50	1	16.00	17.50	2	14.96
		100% RB	75 Pos 0	17.50	1	15.99	17.50	2	15.02		
		1RB Low	1 Pos 0	17.50	0	17.27	17.50	1	16.50		
		1RB Mid	1 Pos 38	17.50	0	17.23	17.50	1	16.45		
		1RB High	1 Pos 74	17.50	0	17.24	17.50	1	16.45		
		50% RB Low	38 Pos 0	17.50	1	16.15	17.50	2	15.16		
		50% RB Mid	38 Pos 19	17.50	1	16.16	17.50	2	15.12		
		50% RB High	38 Pos 39	17.50	1	16.10	17.50	2	15.08		
		100% RB	75 Pos 0	17.50	1	16.17	17.50	2	15.19		
		1RB Low	1 Pos 0	17.50	0	17.32	17.50	1	16.50		
		1RB Mid	1 Pos 38	17.50	0	17.40	17.50	1	16.50		
		1RB High	1 Pos 74	17.50	0	17.43	17.50	1	16.50		
		50% RB Low	38 Pos 0	17.50	1	16.32	17.50	2	15.30		
	50% RB Mid	38 Pos 19	17.50	1	16.30	17.50	2	15.27			
	50% RB High	38 Pos 39	17.50	1	16.24	17.50	2	15.19			
	100% RB	75 Pos 0	17.50	1	16.32	17.50	2	15.35			
	1RB Low	1 Pos 0	17.50	0	16.99	17.50	1	16.30			
	1RB Mid	1 Pos 24	17.50	0	17.02	17.50	1	16.36			
	1RB High	1 Pos 49	17.50	0	16.98	17.50	1	16.32			
	50% RB Low	25 Pos 0	17.50	1	15.97	17.50	2	14.99			
	50% RB Mid	25 Pos 12	17.50	1	15.96	17.50	2	15.00			
	50% RB High	25 Pos 24	17.50	1	15.96	17.50	2	14.97			
	100% RB	50 Pos 0	17.50	1	15.97	17.50	2	14.93			
	1RB Low	1 Pos 0	17.50	0	17.16	17.50	1	16.48			
	1RB Mid	1 Pos 24	17.50	0	17.18	17.50	1	16.50			
	1RB High	1 Pos 49	17.50	0	17.11	17.50	1	16.45			
	50% RB Low	25 Pos 0	17.50	1	16.13	17.50	2	15.14			
	50% RB Mid	25 Pos 12	17.50	1	16.12	17.50	2	15.13			
	50% RB High	25 Pos 24	17.50	1	16.10	17.50	2	15.11			
	100% RB	50 Pos 0	17.50	1	16.10	17.50	2	15.07			
	1RB Low	1 Pos 0	17.50	0	17.25	17.50	1	16.50			
	1RB Mid	1 Pos 24	17.50	0	17.30	17.50	1	16.50			
	1RB High	1 Pos 49	17.50	0	17.29	17.50	1	16.50			
	50% RB Low	25 Pos 0	17.50	1	16.24	17.50	2	15.28			
	50% RB Mid	25 Pos 12	17.50	1	16.27	17.50	2	15.31			
	50% RB High	25 Pos 24	17.50	1	16.25	17.50	2	15.28			
	100% RB	50 Pos 0	17.50	1	16.26	17.50	2	15.23			
	1RB Low	1 Pos 0	17.50	0	17.05	17.50	1	15.98			
	1RB Mid	1 Pos 12	17.50	0	17.07	17.50	1	16.04			
	1RB High	1 Pos 24	17.50	0	17.10	17.50	1	15.97			
	50% RB Low	12 Pos 0	17.50	0	17.01	17.50	1	16.14			
	50% RB Mid	12 Pos 6	17.50	0	16.99	17.50	1	16.13			
	50% RB High	12 Pos 11	17.50	0	17.00	17.50	1	16.15			
	100% RB	25 Pos 0	17.50	1	15.98	17.50	2	15.04			
	1RB Low	1 Pos 0	17.50	0	17.22	17.50	1	16.13			
	1RB Mid	1 Pos 12	17.50	0	17.24	17.50	1	16.16			
	1RB High	1 Pos 24	17.50	0	17.24	17.50	1	16.12			
	50% RB Low	12 Pos 0	17.50	0	17.14	17.50	1	16.32			
	50% RB Mid	12 Pos 6	17.50	0	17.18	17.50	1	16.32			
	50% RB High	12 Pos 11	17.50	0	17.12	17.50	1	16.33			
	100% RB	25 Pos 0	17.50	1	16.12	17.50	2	15.18			
	1RB Low	1 Pos 0	17.50	0	17.31	17.50	1	16.27			
	1RB Mid	1 Pos 12	17.50	0	17.39	17.50	1	16.34			
	1RB High	1 Pos 24	17.50	0	17.32	17.50	1	16.27			
	50% RB Low	12 Pos 0	17.50	0	17.33	17.50	1	16.47			
	50% RB Mid	12 Pos 6	17.50	0	17.32	17.50	1	16.45			
	50% RB High	12 Pos 11	17.50	0	17.32	17.50	1	16.50			
	100% RB	25 Pos 0	17.50	1	16.29	17.50	2	15.37			

B.4.2.11 LTE band 25 FDD – Antenna 8

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 25	20 MHz	26140	1860.0	1RB Low	1 Pos 0	19.00	0	17.81	19.00	1	17.37
				1RB Mid	1 Pos 50	19.00	0	17.89	19.00	1	17.50
				1RB High	1 Pos 99	19.00	0	17.72	19.00	1	17.33
				50% RB Low	50 Pos 0	19.00	1	16.84	19.00	2	15.80
				50% RB Mid	50 Pos 24	19.00	1	16.94	19.00	2	15.90
				50% RB High	50 Pos 50	19.00	1	16.87	19.00	2	15.85
		100% RB	100 Pos 0	19.00	1	16.87	19.00	2	15.86		
		26365	1882.5	1RB Low	1 Pos 0	19.00	0	17.62	19.00	1	16.92
				1RB Mid	1 Pos 50	19.00	0	17.75	19.00	1	17.05
				1RB High	1 Pos 99	19.00	0	17.69	19.00	1	16.99
				50% RB Low	50 Pos 0	19.00	1	16.76	19.00	2	15.70
				50% RB Mid	50 Pos 24	19.00	1	16.78	19.00	2	15.73
				50% RB High	50 Pos 50	19.00	1	16.81	19.00	2	15.77
		100% RB	100 Pos 0	19.00	1	16.74	19.00	2	15.77		
		26590	1905.0	1RB Low	1 Pos 0	19.00	0	17.86	19.00	1	17.05
				1RB Mid	1 Pos 50	19.00	0	17.99	19.00	1	17.17
				1RB High	1 Pos 99	19.00	0	17.94	19.00	1	17.13
				50% RB Low	50 Pos 0	19.00	1	16.92	19.00	2	15.89
	50% RB Mid			50 Pos 24	19.00	1	16.95	19.00	2	15.97	
	50% RB High			50 Pos 50	19.00	1	16.84	19.00	2	15.82	
	100% RB	100 Pos 0	19.00	1	16.90	19.00	2	15.89			
	15 MHz	26115	1857.5	1RB Low	1 Pos 0	19.00	0	17.88	19.00	1	17.45
				1RB Mid	1 Pos 38	19.00	0	17.90	19.00	1	17.45
				1RB High	1 Pos 74	19.00	0	17.79	19.00	1	17.34
				50% RB Low	38 Pos 0	19.00	1	16.88	19.00	2	15.89
				50% RB Mid	38 Pos 19	19.00	1	16.93	19.00	2	15.91
				50% RB High	38 Pos 39	19.00	1	16.85	19.00	2	15.83
		100% RB	75 Pos 0	19.00	1	16.88	19.00	2	15.87		
		26365	1882.5	1RB Low	1 Pos 0	19.00	0	17.62	19.00	1	17.22
				1RB Mid	1 Pos 38	19.00	0	17.71	19.00	1	17.32
				1RB High	1 Pos 74	19.00	0	17.65	19.00	1	17.25
				50% RB Low	38 Pos 0	19.00	1	16.69	19.00	2	15.68
				50% RB Mid	38 Pos 19	19.00	1	16.71	19.00	2	15.74
				50% RB High	38 Pos 39	19.00	1	16.73	19.00	2	15.72
		100% RB	75 Pos 0	19.00	1	16.72	19.00	2	15.68		
		26615	1907.5	1RB Low	1 Pos 0	19.00	0	17.83	19.00	1	17.27
				1RB Mid	1 Pos 38	19.00	0	17.95	19.00	1	17.36
				1RB High	1 Pos 74	19.00	0	17.95	19.00	1	17.38
				50% RB Low	38 Pos 0	19.00	1	16.96	19.00	2	15.96
	50% RB Mid			38 Pos 19	19.00	1	16.98	19.00	2	15.98	
	50% RB High			38 Pos 39	19.00	1	16.89	19.00	2	15.92	
	100% RB	75 Pos 0	19.00	1	16.97	19.00	2	15.96			
	10 MHz	26090	1855.0	1RB Low	1 Pos 0	19.00	0	17.94	19.00	1	16.94
				1RB Mid	1 Pos 24	19.00	0	17.94	19.00	1	16.92
				1RB High	1 Pos 49	19.00	0	17.88	19.00	1	16.88
				50% RB Low	25 Pos 0	19.00	1	16.90	19.00	2	15.99
				50% RB Mid	25 Pos 12	19.00	1	16.93	19.00	2	16.04
				50% RB High	25 Pos 25	19.00	1	16.91	19.00	2	16.01
100% RB		50 Pos0	19.00	1	16.92	19.00	2	15.95			
26365		1882.5	1RB Low	1 Pos 0	19.00	0	17.68	19.00	1	17.25	
			1RB Mid	1 Pos 24	19.00	0	17.74	19.00	1	17.31	
			1RB High	1 Pos 49	19.00	0	17.65	19.00	1	17.27	
			50% RB Low	25 Pos 0	19.00	1	16.67	19.00	2	15.74	
			50% RB Mid	25 Pos 12	19.00	1	16.75	19.00	2	15.77	
			50% RB High	25 Pos 25	19.00	1	16.74	19.00	2	15.76	
100% RB		50 Pos0	19.00	1	16.75	19.00	2	15.73			
26640		1910.0	1RB Low	1 Pos 0	19.00	0	17.93	19.00	1	17.09	
			1RB Mid	1 Pos 24	19.00	0	18.02	19.00	1	17.16	
			1RB High	1 Pos 49	19.00	0	18.07	19.00	1	17.16	
			50% RB Low	25 Pos 0	19.00	1	17.05	19.00	2	16.07	
	50% RB Mid		25 Pos 12	19.00	1	17.00	19.00	2	16.04		
	50% RB High		25 Pos 25	19.00	1	16.96	19.00	2	15.97		
100% RB	50 Pos0	19.00	1	17.03	19.00	2	15.98				

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE25	5 MHz	26065	1852.5	1RB Low	1 Pos 0	19.00	0	17.67	19.00	1	16.69
				1RB Mid	1 Pos 38	19.00	0	17.64	19.00	1	16.68
				1RB High	1 Pos 74	19.00	0	17.63	19.00	1	16.69
				50% RB Low	38 Pos 0	19.00	0	17.71	19.00	1	16.85
				50% RB Mid	38 Pos 19	19.00	0	17.68	19.00	1	16.85
				50% RB High	38 Pos 39	19.00	0	17.69	19.00	1	16.86
		100% RB	75 Pos 0	19.00	1	16.68	19.00	2	15.69		
		26365	1882.5	1RB Low	1 Pos 0	19.00	0	17.85	19.00	1	16.94
				1RB Mid	1 Pos 38	19.00	0	17.83	19.00	1	16.90
				1RB High	1 Pos 74	19.00	0	17.88	19.00	1	16.92
				50% RB Low	38 Pos 0	19.00	0	17.89	19.00	1	17.04
				50% RB Mid	38 Pos 19	19.00	0	17.92	19.00	1	17.05
				50% RB High	38 Pos 39	19.00	0	17.87	19.00	1	17.04
		100% RB	75 Pos 0	19.00	1	16.89	19.00	2	15.87		
		26665	1912.5	1RB Low	1 Pos 0	19.00	0	17.99	19.00	1	17.02
				1RB Mid	1 Pos 38	19.00	0	17.99	19.00	1	17.05
				1RB High	1 Pos 74	19.00	0	18.02	19.00	1	17.08
				50% RB Low	38 Pos 0	19.00	0	18.06	19.00	1	17.20
	50% RB Mid			38 Pos 19	19.00	0	18.08	19.00	1	17.22	
	50% RB High			38 Pos 39	19.00	0	18.05	19.00	1	17.24	
	100% RB	75 Pos 0	19.00	1	17.07	19.00	2	16.02			
	3 MHz	26055	1851.5	1RB Low	1 Pos 0	19.00	0	17.92	19.00	1	17.46
				1RB Mid	1 Pos 24	19.00	0	17.92	19.00	1	17.45
				1RB High	1 Pos 49	19.00	0	17.85	19.00	1	17.38
				50% RB Low	25 Pos 0	19.00	1	16.86	19.00	2	16.08
				50% RB Mid	25 Pos 12	19.00	1	16.86	19.00	2	16.04
				50% RB High	25 Pos 24	19.00	1	16.85	19.00	2	16.05
		100% RB	50 Pos 0	19.00	1	16.86	19.00	2	15.93		
		26365	1882.5	1RB Low	1 Pos 0	19.00	0	17.66	19.00	1	17.25
				1RB Mid	1 Pos 24	19.00	0	17.67	19.00	1	17.24
				1RB High	1 Pos 49	19.00	0	17.64	19.00	1	17.21
				50% RB Low	25 Pos 0	19.00	1	16.64	19.00	2	15.83
				50% RB Mid	25 Pos 12	19.00	1	16.66	19.00	2	15.82
				50% RB High	25 Pos 24	19.00	1	16.64	19.00	2	15.82
		100% RB	50 Pos 0	19.00	1	16.66	19.00	2	15.71		
		26675	1913.5	1RB Low	1 Pos 0	19.00	0	18.03	19.00	1	17.54
				1RB Mid	1 Pos 24	19.00	0	18.06	19.00	1	17.54
				1RB High	1 Pos 49	19.00	0	18.03	19.00	1	17.53
				50% RB Low	25 Pos 0	19.00	1	17.00	19.00	2	16.26
	50% RB Mid			25 Pos 12	19.00	1	17.03	19.00	2	16.25	
	50% RB High			25 Pos 24	19.00	1	17.04	19.00	2	16.23	
	100% RB	50 Pos 0	19.00	1	17.02	19.00	2	16.12			
	1.4 MHz	26047	1850.7	1RB Low	1 Pos 0	19.00	0	17.96	19.00	1	17.00
				1RB Mid	1 Pos 12	19.00	0	17.95	19.00	1	16.96
				1RB High	1 Pos 24	19.00	0	17.92	19.00	1	16.95
				50% RB Low	12 Pos 0	19.00	1	16.90	19.00	2	15.85
				50% RB Mid	12 Pos 6	19.00	1	16.92	19.00	2	15.87
				50% RB High	12 Pos 11	19.00	1	16.88	19.00	2	15.83
		100% RB	25 Pos 0	19.00	1	16.91	19.00	2	15.93		
		26365	1882.5	1RB Low	1 Pos 0	19.00	0	17.83	19.00	1	16.59
				1RB Mid	1 Pos 12	19.00	0	17.85	19.00	1	16.64
				1RB High	1 Pos 24	19.00	0	17.80	19.00	1	16.65
				50% RB Low	12 Pos 0	19.00	1	16.67	19.00	2	15.69
				50% RB Mid	12 Pos 6	19.00	1	16.70	19.00	2	15.68
				50% RB High	12 Pos 11	19.00	1	16.69	19.00	2	15.69
		100% RB	25 Pos 0	19.00	1	16.67	19.00	2	15.72		
		26683	1914.3	1RB Low	1 Pos 0	19.00	0	18.15	19.00	1	16.91
				1RB Mid	1 Pos 12	19.00	0	18.23	19.00	1	17.00
				1RB High	1 Pos 24	19.00	0	18.25	19.00	1	17.01
				50% RB Low	12 Pos 0	19.00	1	17.12	19.00	2	16.12
	50% RB Mid			12 Pos 6	19.00	1	17.08	19.00	2	16.06	
	50% RB High			12 Pos 11	19.00	1	17.02	19.00	2	15.99	
	100% RB	25 Pos 0	19.00	1	17.08	19.00	2	16.15			

B.4.2.12 LTE band 26 FDD – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE26	15 MHz	26775	821.5	1RB Low	1 Pos 0	21.50	0	21.07	21.50	1	20.37
				1RB Mid	1 Pos 38	21.50	0	21.17	21.50	1	20.47
				1RB High	1 Pos 74	21.50	0	21.11	21.50	1	20.44
				50% RB Low	38 Pos 0	21.50	1	20.09	21.50	2	19.08
				50% RB Mid	38 Pos 19	21.50	1	20.12	21.50	2	19.14
				50% RB High	38 Pos 39	21.50	1	20.17	21.50	2	19.17
		100% RB	75 Pos 0	21.50	1	20.13	21.50	2	19.13		
		26865	831.5	1RB Low	1 Pos 0	21.50	0	21.14	21.50	1	20.21
				1RB Mid	1 Pos 38	21.50	0	21.23	21.50	1	20.25
				1RB High	1 Pos 74	21.50	0	21.15	21.50	1	20.16
				50% RB Low	38 Pos 0	21.50	1	20.17	21.50	2	19.14
				50% RB Mid	38 Pos 19	21.50	1	20.16	21.50	2	19.14
				50% RB High	38 Pos 39	21.50	1	20.10	21.50	2	19.09
		100% RB	75 Pos 0	21.50	1	20.14	21.50	2	19.15		
		26965	841.5	1RB Low	1 Pos 0	21.50	0	21.13	21.50	1	20.30
				1RB Mid	1 Pos 38	21.50	0	21.21	21.50	1	20.40
				1RB High	1 Pos 74	21.50	0	21.13	21.50	1	20.21
				50% RB Low	38 Pos 0	21.50	1	20.22	21.50	2	19.24
	50% RB Mid			38 Pos 19	21.50	1	20.14	21.50	2	19.23	
	50% RB High			38 Pos 39	21.50	1	20.11	21.50	2	19.19	
	100% RB	75 Pos 0	21.50	1	20.17	21.50	2	19.22			
	10 MHz	26750	820	1RB Low	1 Pos 0	21.50	0	21.12	21.50	1	20.40
				1RB Mid	1 Pos 24	21.50	0	21.13	21.50	1	20.40
				1RB High	1 Pos 49	21.50	0	21.02	21.50	1	20.36
				50% RB Low	25 Pos 0	21.50	1	20.08	21.50	2	19.17
				50% RB Mid	25 Pos 12	21.50	1	20.13	21.50	2	19.22
				50% RB High	25 Pos 24	21.50	1	20.13	21.50	2	19.19
		100% RB	50 Pos 0	21.50	1	20.12	21.50	2	19.14		
		26865	831.5	1RB Low	1 Pos 0	21.50	0	21.26	21.50	1	20.07
				1RB Mid	1 Pos 24	21.50	0	21.28	21.50	1	20.12
				1RB High	1 Pos 49	21.50	0	21.19	21.50	1	20.05
				50% RB Low	25 Pos 0	21.50	1	20.15	21.50	2	19.22
				50% RB Mid	25 Pos 12	21.50	1	20.20	21.50	2	19.19
				50% RB High	25 Pos 24	21.50	1	20.13	21.50	2	19.14
		100% RB	50 Pos 0	21.50	1	20.21	21.50	2	19.16		
		26990	844	1RB Low	1 Pos 0	21.50	0	21.19	21.50	1	20.40
				1RB Mid	1 Pos 24	21.50	0	21.29	21.50	1	20.44
				1RB High	1 Pos 49	21.50	0	21.17	21.50	1	20.26
				50% RB Low	25 Pos 0	21.50	1	20.21	21.50	2	19.26
	50% RB Mid			25 Pos 12	21.50	1	20.25	21.50	2	19.25	
	50% RB High			25 Pos 24	21.50	1	20.12	21.50	2	19.16	
	100% RB	50 Pos 0	21.50	1	20.25	21.50	2	19.16			
	5.0 MHz	26715	816.5	1RB Low	1 Pos 0	21.50	0	21.13	21.50	1	20.35
				1RB Mid	1 Pos 12	21.50	0	21.15	21.50	1	20.41
				1RB High	1 Pos 24	21.50	0	21.15	21.50	1	20.41
				50% RB Low	12 Pos 0	21.50	1	20.04	21.50	2	19.06
				50% RB Mid	12 Pos 6	21.50	1	20.12	21.50	2	19.06
				50% RB High	12 Pos 11	21.50	1	20.06	21.50	2	19.07
100% RB		25 Pos 0	21.50	1	20.12	21.50	2	19.12			
26865		831.5	1RB Low	1 Pos 0	21.50	0	21.21	21.50	1	20.48	
			1RB Mid	1 Pos 12	21.50	0	21.19	21.50	1	20.45	
			1RB High	1 Pos 24	21.50	0	21.14	21.50	1	20.42	
			50% RB Low	12 Pos 0	21.50	1	20.25	21.50	2	19.23	
			50% RB Mid	12 Pos 6	21.50	1	20.20	21.50	2	19.23	
			50% RB High	12 Pos 11	21.50	1	20.17	21.50	2	19.20	
100% RB		25 Pos 0	21.50	1	20.18	21.50	2	19.21			
27015		846.5	1RB Low	1 Pos 0	21.50	0	21.17	21.50	1	20.41	
			1RB Mid	1 Pos 12	21.50	0	21.12	21.50	1	20.37	
			1RB High	1 Pos 24	21.50	0	21.25	21.50	1	20.35	
			50% RB Low	12 Pos 0	21.50	1	20.20	21.50	2	19.13	
	50% RB Mid		12 Pos 6	21.50	1	20.12	21.50	2	19.10		
	50% RB High		12 Pos 11	21.50	1	20.12	21.50	2	19.05		
100% RB	25 Pos 0	21.50	1	20.17	21.50	2	19.14				

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE26	3.0 MHz	26705	815.5	1RB Low	1 Pos 0	21.50	0	21.05	21.50	1	20.40
				1RB Mid	1 Pos 7	21.50	0	21.07	21.50	1	20.40
				1RB High	1 Pos 14	21.50	0	21.01	21.50	1	20.38
				50% RB Low	8 Pos 0	21.50	1	20.06	21.50	2	19.12
				50% RB Mid	8 Pos 4	21.50	1	20.06	21.50	2	19.11
				50% RB High	8 Pos 7	21.50	1	20.05	21.50	2	19.11
		26865	831.5	100% RB	15 Pos 0	21.50	1	20.04	21.50	2	19.06
				1RB Low	1 Pos 0	21.50	0	21.19	21.50	1	20.48
				1RB Mid	1 Pos 7	21.50	0	21.14	21.50	1	20.46
				1RB High	1 Pos 14	21.50	0	21.11	21.50	1	20.42
				50% RB Low	8 Pos 0	21.50	1	20.21	21.50	2	19.22
				50% RB Mid	8 Pos 4	21.50	1	20.15	21.50	2	19.18
		27025	847.5	50% RB High	8 Pos 7	21.50	1	20.12	21.50	2	19.18
				100% RB	15 Pos 0	21.50	1	20.16	21.50	2	19.12
				1RB Low	1 Pos 0	21.50	0	21.10	21.50	1	20.40
				1RB Mid	1 Pos 7	21.50	0	21.18	21.50	1	20.43
				1RB High	1 Pos 14	21.50	0	21.09	21.50	1	20.44
				50% RB Low	8 Pos 0	21.50	1	20.14	21.50	2	19.20
	1.4 MHz	26697	814.7	50% RB Mid	8 Pos 4	21.50	1	20.13	21.50	2	19.19
				50% RB High	8 Pos 7	21.50	1	20.13	21.50	2	19.18
				100% RB	15 Pos 0	21.50	1	20.16	21.50	2	19.10
				1RB Low	1 Pos 0	21.50	0	21.04	21.50	1	19.95
				1RB Mid	1 Pos 2	21.50	0	21.07	21.50	1	20.02
				1RB High	1 Pos 5	21.50	0	21.05	21.50	1	19.94
		26865	831.5	50% RB Low	3 Pos 0	21.50	0	20.98	21.50	1	20.10
				50% RB Mid	3 Pos 1	21.50	0	21.00	21.50	1	20.14
				50% RB High	3 Pos 2	21.50	0	20.99	21.50	1	20.15
				100% RB	6 Pos 0	21.50	1	19.92	21.50	2	19.16
				1RB Low	1 Pos 0	21.50	0	21.13	21.50	1	20.05
				1RB Mid	1 Pos 2	21.50	0	21.17	21.50	1	20.10
		27033	848.3	1RB High	1 Pos 5	21.50	0	21.09	21.50	1	20.03
				50% RB Low	3 Pos 0	21.50	0	21.04	21.50	1	20.19
				50% RB Mid	3 Pos 1	21.50	0	21.08	21.50	1	20.20
				50% RB High	3 Pos 2	21.50	0	21.02	21.50	1	20.19
				100% RB	6 Pos 0	21.50	1	19.99	21.50	2	19.24
				1RB Low	1 Pos 0	21.50	0	21.06	21.50	1	19.94
	27033	848.3	1RB Mid	1 Pos 2	21.50	0	21.07	21.50	1	20.03	
			1RB High	1 Pos 5	21.50	0	21.04	21.50	1	19.96	
			50% RB Low	3 Pos 0	21.50	0	20.97	21.50	1	20.11	
			50% RB Mid	3 Pos 1	21.50	0	21.04	21.50	1	20.16	
			50% RB High	3 Pos 2	21.50	0	21.02	21.50	1	20.16	
			100% RB	6 Pos 0	21.50	1	19.97	21.50	2	19.06	

B.4.2.13 LTE band 30 FDD – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE30	10 MHz	27710	2310	1RB Low	1 Pos 0	17.50	0	15.72	17.50	1	15.50
				1RB Mid	1 Pos 24	17.50	0	15.74	17.50	1	15.51
				1RB High	1 Pos 49	17.50	0	15.73	17.50	1	15.45
				50% RB Low	25 Pos 0	17.50	1	15.19	17.50	2	14.26
				50% RB Mid	25 Pos 12	17.50	1	15.21	17.50	2	14.26
				50% RB High	25 Pos 24	17.50	1	15.05	17.50	2	14.08
				100% RB	50 Pos 0	17.50	1	15.16	17.50	2	14.12
	5.0 MHz	27710	2310	1RB Low	1 Pos 0	17.50	0	15.82	17.50	1	15.49
				1RB Mid	1 Pos 12	17.50	0	15.78	17.50	1	15.42
				1RB High	1 Pos 24	17.50	0	15.80	17.50	1	15.40
				50% RB Low	12 Pos 0	17.50	1	15.16	17.50	2	14.14
				50% RB Mid	12 Pos 6	17.50	1	15.19	17.50	2	14.15
				50% RB High	12 Pos 11	17.50	1	15.16	17.50	2	14.12
				100% RB	25 Pos 0	17.50	1	15.20	17.50	2	14.23

B.4.2.14 LTE band 30 FDD – Antenna 8

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE30	10 MHz	27710	2310	1RB Low	1 Pos 0	19.00	0	17.83	19.00	1	17.08
				1RB Mid	1 Pos 24	19.00	0	17.87	19.00	1	17.08
				1RB High	1 Pos 49	19.00	0	17.82	19.00	1	17.03
				50% RB Low	25 Pos 0	19.00	1	16.72	19.00	2	15.80
				50% RB Mid	25 Pos 12	19.00	1	16.77	19.00	2	15.85
				50% RB High	25 Pos 24	19.00	1	16.66	19.00	2	15.66
				100% RB	50 Pos 0	19.00	1	16.67	19.00	2	15.65
	5.0 MHz	27710	2310	1RB Low	1 Pos 0	19.00	0	17.94	19.00	1	17.13
				1RB Mid	1 Pos 12	19.00	0	17.93	19.00	1	17.03
				1RB High	1 Pos 24	19.00	0	17.93	19.00	1	17.00
				50% RB Low	12 Pos 0	19.00	1	16.73	19.00	2	15.70
				50% RB Mid	12 Pos 6	19.00	1	16.81	19.00	2	15.76
				50% RB High	12 Pos 11	19.00	1	16.81	19.00	2	15.75
				100% RB	25 Pos 0	19.00	1	16.77	19.00	2	15.80

B.4.2.15 LTE band 38 FDD – Antenna 5

SAR Measurement for LTE Band 38 TDD (Frequency range: 2570 – 2620MHz) is covered by LTE Band 41 TDD (Frequency range: 2496 – 2690MHz) due to overlapping frequency range, same maximum tune-up, and same bandwidth.

B.4.2.6 LTE band 41 TDD – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE41	20 MHz	39750	2506	1RB Low	1 Pos 0	16.00	0	15.70	16.00	1	14.92
				1RB Mid	1 Pos 50	16.00	0	15.69	16.00	1	14.87
				1RB High	1 Pos 99	16.00	0	15.41	16.00	1	14.56
				50% RB Low	50 Pos 0	16.00	1	14.65	16.00	2	13.63
				50% RB Mid	50 Pos 24	16.00	1	14.63	16.00	2	13.63
				50% RB High	50 Pos 50	16.00	1	14.58	16.00	2	13.57
		40185	2549.5	1RB Low	1 Pos 0	16.00	0	14.93	16.00	1	14.12
				1RB Mid	1 Pos 50	16.00	0	14.84	16.00	1	14.04
				1RB High	1 Pos 99	16.00	0	14.64	16.00	1	13.85
				50% RB Low	50 Pos 0	16.00	1	13.97	16.00	2	12.94
				50% RB Mid	50 Pos 24	16.00	1	13.82	16.00	2	12.83
				50% RB High	50 Pos 50	16.00	1	13.67	16.00	2	12.67
		40620	2593	100% RB	100 Pos 0	16.00	1	13.86	16.00	2	12.83
				1RB Low	1 Pos 0	16.00	0	15.22	16.00	1	14.39
				1RB Mid	1 Pos 50	16.00	0	15.45	16.00	1	14.70
				1RB High	1 Pos 99	16.00	0	15.70	16.00	1	14.90
				50% RB Low	50 Pos 0	16.00	1	14.31	16.00	2	13.29
				50% RB Mid	50 Pos 24	16.00	1	14.42	16.00	2	13.38
		41055	2636.5	50% RB High	50 Pos 50	16.00	1	14.56	16.00	2	13.54
				100% RB	100 Pos 0	16.00	1	14.45	16.00	2	13.43
				1RB Low	1 Pos 0	16.00	0	16.00	16.00	1	15.00
				1RB Mid	1 Pos 50	16.00	0	16.00	16.00	1	15.00
				1RB High	1 Pos 99	16.00	0	15.80	16.00	1	14.96
				50% RB Low	50 Pos 0	16.00	1	15.00	16.00	2	14.00
		41490	2680	50% RB Mid	50 Pos 24	16.00	1	15.00	16.00	2	14.00
				50% RB High	50 Pos 50	16.00	1	15.00	16.00	2	13.95
				100% RB	100 Pos 0	16.00	1	15.00	16.00	2	14.00
				1RB Low	1 Pos 0	16.00	0	15.85	16.00	1	15.00
				1RB Mid	1 Pos 50	16.00	0	15.98	16.00	1	15.00
				1RB High	1 Pos 99	16.00	0	15.56	16.00	1	14.69
				50% RB Low	50 Pos 0	16.00	1	14.96	16.00	2	13.95
				50% RB Mid	50 Pos 24	16.00	1	14.99	16.00	2	13.93
				50% RB High	50 Pos 50	16.00	1	14.81	16.00	2	13.82
				100% RB	100 Pos 0	16.00	1	14.92	16.00	2	13.85

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM			
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	
LTE41	15 MHz	39750	2506	1RB Low	1 Pos 0	16.00	0	15.67	16.00	1	15.00	
				1RB Mid	1 Pos 38	16.00	0	15.64	16.00	1	14.94	
				1RB High	1 Pos 74	16.00	0	15.40	16.00	1	14.78	
				50% RB Low	38 Pos 0	16.00	1	14.61	16.00	2	13.60	
				50% RB Mid	38 Pos 19	16.00	1	14.60	16.00	2	13.58	
				50% RB High	38 Pos 39	16.00	1	14.52	16.00	2	13.53	
		40185	2549.5	2593	100% RB	75 Pos 0	16.00	1	14.57	16.00	2	13.56
					1RB Low	1 Pos 0	16.00	0	14.96	16.00	1	14.26
					1RB Mid	1 Pos 38	16.00	0	14.79	16.00	1	14.15
					1RB High	1 Pos 74	16.00	0	14.64	16.00	1	13.99
					50% RB Low	38 Pos 0	16.00	1	13.90	16.00	2	12.88
					50% RB Mid	38 Pos 19	16.00	1	13.78	16.00	2	12.80
		40620	2593	2636.5	50% RB High	38 Pos 39	16.00	1	13.71	16.00	2	12.68
					100% RB	75 Pos 0	16.00	1	13.81	16.00	2	12.78
					1RB Low	1 Pos 0	16.00	0	15.20	16.00	1	14.57
					1RB Mid	1 Pos 38	16.00	0	15.37	16.00	1	14.75
					1RB High	1 Pos 74	16.00	0	15.56	16.00	1	14.92
					50% RB Low	38 Pos 0	16.00	1	14.29	16.00	2	13.29
		41055	2636.5	2680.0	50% RB Mid	38 Pos 19	16.00	1	14.40	16.00	2	13.38
					50% RB High	38 Pos 39	16.00	1	14.51	16.00	2	13.49
					100% RB	75 Pos 0	16.00	1	14.50	16.00	2	13.47
					1RB Low	1 Pos 0	16.00	0	16.00	16.00	1	15.00
					1RB Mid	1 Pos 38	16.00	0	16.00	16.00	1	15.00
					1RB High	1 Pos 74	16.00	0	16.00	16.00	1	15.00
		41490	2680.0	2680.0	50% RB Low	38 Pos 0	16.00	1	14.98	16.00	2	14.00
					50% RB Mid	38 Pos 19	16.00	1	15.00	16.00	2	14.00
					50% RB High	38 Pos 39	16.00	1	15.00	16.00	2	14.00
					100% RB	75 Pos 0	16.00	1	15.00	16.00	2	14.00
					1RB Low	1 Pos 0	16.00	0	15.91	16.00	1	15.00
					1RB Mid	1 Pos 38	16.00	0	15.91	16.00	1	15.00
		41490	2680.0	2680.0	1RB High	1 Pos 74	16.00	0	15.00	16.00	1	15.00
					50% RB Low	38 Pos 0	16.00	1	14.94	16.00	2	13.94
					50% RB Mid	38 Pos 19	16.00	1	14.94	16.00	2	13.92
					50% RB High	38 Pos 39	16.00	1	14.83	16.00	2	13.84
					100% RB	75 Pos 0	16.00	1	14.90	16.00	2	13.89

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM			
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	
LTE41	10 MHz	39750	2506	1RB Low	1 Pos 0	16.00	0	15.66	16.00	1	15.00	
				1RB Mid	1 Pos 24	16.00	0	15.64	16.00	1	14.96	
				1RB High	1 Pos 49	16.00	0	15.51	16.00	1	14.81	
				50% RB Low	25 Pos 0	16.00	1	14.63	16.00	2	13.66	
				50% RB Mid	25 Pos 12	16.00	1	14.55	16.00	2	13.63	
				50% RB High	25 Pos 24	16.00	1	14.53	16.00	2	13.58	
		40185	2549.5	2593	100% RB	50 Pos 0	16.00	1	14.60	16.00	2	13.56
					1RB Low	1 Pos 0	16.00	0	14.89	16.00	1	14.17
					1RB Mid	1 Pos 24	16.00	0	14.87	16.00	1	14.17
					1RB High	1 Pos 49	16.00	0	14.72	16.00	1	14.04
					50% RB Low	25 Pos 0	16.00	1	13.85	16.00	2	12.93
					50% RB Mid	25 Pos 12	16.00	1	13.84	16.00	2	12.88
		40620	2593	2636.5	50% RB High	25 Pos 24	16.00	1	13.67	16.00	2	12.75
					100% RB	50 Pos 0	16.00	1	13.82	16.00	2	12.80
					1RB Low	1 Pos 0	16.00	0	15.29	16.00	1	14.62
					1RB Mid	1 Pos 24	16.00	0	15.45	16.00	1	14.76
					1RB High	1 Pos 49	16.00	0	15.51	16.00	1	14.88
					50% RB Low	25 Pos 0	16.00	1	14.31	16.00	2	13.38
		41055	2636.5	2680	50% RB Mid	25 Pos 12	16.00	1	14.35	16.00	2	13.41
					100% RB	50 Pos 0	16.00	1	14.44	16.00	2	13.49
					1RB Low	1 Pos 0	16.00	1	14.43	16.00	2	13.41
					1RB Mid	1 Pos 24	16.00	0	16.00	16.00	1	15.00
					1RB High	1 Pos 49	16.00	0	16.00	16.00	1	15.00
					50% RB Low	25 Pos 0	16.00	0	16.00	16.00	1	15.00
		41490	2680	2680	50% RB Mid	25 Pos 12	16.00	1	14.92	16.00	2	14.00
					100% RB	50 Pos 0	16.00	1	15.00	16.00	2	14.00
					1RB Low	1 Pos 0	16.00	1	15.00	16.00	2	14.00
					1RB Mid	1 Pos 24	16.00	1	15.00	16.00	2	13.99
					1RB High	1 Pos 49	16.00	0	15.97	16.00	1	15.00
					50% RB Low	25 Pos 0	16.00	0	15.95	16.00	1	15.00
		41490	2680	2680	50% RB Mid	25 Pos 12	16.00	0	15.78	16.00	1	15.00
					100% RB	50 Pos 0	16.00	1	14.95	16.00	2	14.00
					1RB Low	1 Pos 0	16.00	1	14.90	16.00	2	14.00
					1RB Mid	1 Pos 24	16.00	1	14.83	16.00	2	13.93
		41490	2680	2680	1RB High	1 Pos 49	16.00	1	14.96	16.00	2	13.92

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE41	5.0 MHz	39750	2506	1RB Low	1 Pos 0	16.00	0	15.75	16.00	1	14.92
				1RB Mid	1 Pos 12	16.00	0	15.71	16.00	1	14.86
				1RB High	1 Pos 24	16.00	0	15.65	16.00	1	14.83
				50% RB Low	12 Pos 0	16.00	1	14.66	16.00	2	13.56
				50% RB Mid	12 Pos 6	16.00	1	14.65	16.00	2	13.54
				50% RB High	12 Pos 11	16.00	1	14.61	16.00	2	13.55
		40185	2549.5	100% RB	25 Pos 0	16.00	1	14.63	16.00	2	13.59
				1RB Low	1 Pos 0	16.00	0	14.82	16.00	1	14.14
				1RB Mid	1 Pos 12	16.00	0	14.88	16.00	1	14.23
				1RB High	1 Pos 24	16.00	0	14.76	16.00	1	14.08
				50% RB Low	12 Pos 0	16.00	1	13.82	16.00	2	12.75
				50% RB Mid	12 Pos 6	16.00	1	13.73	16.00	2	12.75
		40620	2593	50% RB High	12 Pos 11	16.00	1	13.78	16.00	2	12.66
				100% RB	25 Pos 0	16.00	1	13.77	16.00	2	12.78
				1RB Low	1 Pos 0	16.00	0	15.31	16.00	1	14.82
				1RB Mid	1 Pos 12	16.00	0	15.36	16.00	1	14.84
				1RB High	1 Pos 24	16.00	0	15.35	16.00	1	14.83
				50% RB Low	12 Pos 0	16.00	1	14.38	16.00	2	13.32
		41055	2636.5	50% RB Mid	12 Pos 6	16.00	1	14.41	16.00	2	13.32
				50% RB High	12 Pos 11	16.00	1	14.41	16.00	2	13.30
				100% RB	25 Pos 0	16.00	1	14.42	16.00	2	13.41
				1RB Low	1 Pos 0	16.00	0	16.00	16.00	1	15.00
				1RB Mid	1 Pos 12	16.00	0	16.00	16.00	1	15.00
				1RB High	1 Pos 24	16.00	0	16.00	16.00	1	15.00
		41490	2680	50% RB Low	12 Pos 0	16.00	1	14.99	16.00	2	13.96
				50% RB Mid	12 Pos 6	16.00	1	15.00	16.00	2	13.97
				50% RB High	12 Pos 11	16.00	1	14.99	16.00	2	13.96
				100% RB	25 Pos 0	16.00	1	15.00	16.00	2	14.00
				1RB Low	1 Pos 0	16.00	0	15.86	16.00	1	15.00
				1RB Mid	1 Pos 12	16.00	0	15.82	16.00	1	15.00
		41490	2680	1RB High	1 Pos 24	16.00	0	15.79	16.00	1	15.00
				50% RB Low	12 Pos 0	16.00	1	14.93	16.00	2	13.89
				50% RB Mid	12 Pos 6	16.00	1	14.93	16.00	2	13.85
				50% RB High	12 Pos 11	16.00	1	14.88	16.00	2	13.83
				100% RB	25 Pos 0	16.00	1	14.95	16.00	2	13.90

B.4.2.17 LTE band 41 TDD – Antenna 8

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE41	20 MHz	39750	2506	1RB Low	1 Pos 0	20.50	0	18.98	20.50	1	18.43
				1RB Mid	1 Pos 50	20.50	0	19.36	20.50	1	18.68
				1RB High	1 Pos 99	20.50	0	19.44	20.50	1	18.72
				50% RB Low	50 Pos 0	20.50	1	18.13	20.50	2	17.11
				50% RB Mid	50 Pos 24	20.50	1	18.32	20.50	2	17.26
				50% RB High	50 Pos 50	20.50	1	18.35	20.50	2	17.33
		100% RB	100 Pos 0	20.50	1	18.29	20.50	2	17.24		
		40185	2549.5	1RB Low	1 Pos 0	20.50	0	19.41	20.50	1	18.42
				1RB Mid	1 Pos 50	20.50	0	19.33	20.50	1	18.28
				1RB High	1 Pos 99	20.50	0	19.09	20.50	1	18.16
				50% RB Low	50 Pos 0	20.50	1	18.38	20.50	2	17.24
				50% RB Mid	50 Pos 24	20.50	1	18.22	20.50	2	17.12
				50% RB High	50 Pos 50	20.50	1	18.12	20.50	2	17.01
		100% RB	100 Pos 0	20.50	1	18.25	20.50	2	17.14		
		40620	2593	1RB Low	1 Pos 0	20.50	0	19.40	20.50	1	18.56
				1RB Mid	1 Pos 50	20.50	0	19.54	20.50	1	18.60
				1RB High	1 Pos 99	20.50	0	19.66	20.50	1	18.71
				50% RB Low	50 Pos 0	20.50	1	18.44	20.50	2	17.45
				50% RB Mid	50 Pos 24	20.50	1	18.47	20.50	2	17.52
				50% RB High	50 Pos 50	20.50	1	18.54	20.50	2	17.55
		100% RB	100 Pos 0	20.50	1	18.51	20.50	2	17.51		
		41055	2636.5	1RB Low	1 Pos 0	20.50	0	19.61	20.50	1	18.92
				1RB Mid	1 Pos 50	20.50	0	19.50	20.50	1	18.82
				1RB High	1 Pos 99	20.50	0	19.23	20.50	1	18.72
				50% RB Low	50 Pos 0	20.50	1	18.53	20.50	2	17.46
				50% RB Mid	50 Pos 24	20.50	1	18.53	20.50	2	17.46
				50% RB High	50 Pos 50	20.50	1	18.39	20.50	2	17.44
		100% RB	100 Pos 0	20.50	1	18.48	20.50	2	17.47		
		41490	2680	1RB Low	1 Pos 0	20.50	0	19.52	20.50	1	18.67
				1RB Mid	1 Pos 50	20.50	0	19.66	20.50	1	18.74
				1RB High	1 Pos 99	20.50	0	19.24	20.50	1	18.45
				50% RB Low	50 Pos 0	20.50	1	18.66	20.50	2	17.58
				50% RB Mid	50 Pos 24	20.50	1	18.64	20.50	2	17.58
				50% RB High	50 Pos 50	20.50	1	18.49	20.50	2	17.52
		100% RB	100 Pos 0	20.50	1	18.57	20.50	2	17.57		

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE41	15 MHz	39750	2506	1RB Low	1 Pos 0	20.50	0	19.04	20.50	1	18.56
				1RB Mid	1 Pos 38	20.50	0	19.31	20.50	1	18.68
				1RB High	1 Pos 74	20.50	0	19.39	20.50	1	18.75
				50% RB Low	38 Pos 0	20.50	1	18.17	20.50	2	17.30
				50% RB Mid	38 Pos 19	20.50	1	18.23	20.50	2	17.38
				50% RB High	38 Pos 39	20.50	1	18.36	20.50	2	17.37
		40185	2549.5	100% RB	75 Pos 0	20.50	1	18.26	20.50	2	17.23
				1RB Low	1 Pos 0	20.50	0	19.34	20.50	1	18.17
				1RB Mid	1 Pos 38	20.50	0	19.17	20.50	1	18.13
				1RB High	1 Pos 74	20.50	0	19.05	20.50	1	17.97
				50% RB Low	38 Pos 0	20.50	1	18.25	20.50	2	17.20
				50% RB Mid	38 Pos 19	20.50	1	18.13	20.50	2	17.20
		40620	2593	50% RB High	38 Pos 39	20.50	1	18.05	20.50	2	17.05
				100% RB	75 Pos 0	20.50	1	18.19	20.50	2	17.13
				1RB Low	1 Pos 0	20.50	0	19.46	20.50	1	18.54
				1RB Mid	1 Pos 38	20.50	0	19.55	20.50	1	18.59
				1RB High	1 Pos 74	20.50	0	19.61	20.50	1	18.67
				50% RB Low	38 Pos 0	20.50	1	18.44	20.50	2	17.47
		41055	2636.5	50% RB Mid	38 Pos 19	20.50	1	18.49	20.50	2	17.48
				50% RB High	38 Pos 39	20.50	1	18.56	20.50	2	17.55
				100% RB	75 Pos 0	20.50	1	18.56	20.50	2	17.50
				1RB Low	1 Pos 0	20.50	0	19.56	20.50	1	18.87
				1RB Mid	1 Pos 38	20.50	0	19.47	20.50	1	18.81
				1RB High	1 Pos 74	20.50	0	19.40	20.50	1	18.77
		41490	2680.0	50% RB Low	38 Pos 0	20.50	1	18.49	20.50	2	17.54
				50% RB Mid	38 Pos 19	20.50	1	18.47	20.50	2	17.55
				50% RB High	38 Pos 39	20.50	1	18.44	20.50	2	17.51
				100% RB	75 Pos 0	20.50	1	18.51	20.50	2	17.44
				1RB Low	1 Pos 0	20.50	0	19.63	20.50	1	18.57
				1RB Mid	1 Pos 38	20.50	0	19.63	20.50	1	18.58
		41490	2680.0	1RB High	1 Pos 74	20.50	0	19.43	20.50	1	18.38
				50% RB Low	38 Pos 0	20.50	1	18.61	20.50	2	17.67
				50% RB Mid	38 Pos 19	20.50	1	18.62	20.50	2	17.62
				50% RB High	38 Pos 39	20.50	1	18.53	20.50	2	17.54
				100% RB	75 Pos 0	20.50	1	18.61	20.50	2	17.62

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM			
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	
LTE41	10 MHz	39750	2506	1RB Low	1 Pos 0	20.50	0	19.21	20.50	1	18.64	
				1RB Mid	1 Pos 24	20.50	0	19.35	20.50	1	18.71	
				1RB High	1 Pos 49	20.50	0	19.37	20.50	1	18.72	
				50% RB Low	25 Pos 0	20.50	1	18.23	20.50	2	17.23	
				50% RB Mid	25 Pos 12	20.50	1	18.26	20.50	2	17.25	
				50% RB High	25 Pos 24	20.50	1	18.29	20.50	2	17.21	
		40185	2549.5	2593	100% RB	50 Pos 0	20.50	1	18.28	20.50	2	17.26
					1RB Low	1 Pos 0	20.50	0	19.28	20.50	1	18.51
					1RB Mid	1 Pos 24	20.50	0	19.25	20.50	1	18.47
					1RB High	1 Pos 49	20.50	0	19.10	20.50	1	18.42
					50% RB Low	25 Pos 0	20.50	1	18.20	20.50	2	17.24
					50% RB Mid	25 Pos 12	20.50	1	18.16	20.50	2	17.17
		40620	2593	2636.5	50% RB High	25 Pos 24	20.50	1	18.04	20.50	2	17.14
					100% RB	50 Pos 0	20.50	1	18.20	20.50	2	17.16
					1RB Low	1 Pos 0	20.50	0	19.52	20.50	1	18.75
					1RB Mid	1 Pos 24	20.50	0	19.57	20.50	1	18.78
					1RB High	1 Pos 49	20.50	0	19.66	20.50	1	18.75
					50% RB Low	25 Pos 0	20.50	1	18.51	20.50	2	17.41
		41055	2636.5	2680	50% RB Mid	25 Pos 12	20.50	1	18.49	20.50	2	17.42
					100% RB	50 Pos 0	20.50	1	18.53	20.50	2	17.38
					1RB Low	1 Pos 0	20.50	1	18.53	20.50	2	17.42
					1RB Mid	1 Pos 24	20.50	0	19.57	20.50	1	18.83
					1RB High	1 Pos 49	20.50	0	19.49	20.50	1	18.84
					50% RB Low	25 Pos 0	20.50	0	19.46	20.50	1	18.78
		41490	2680	2680	50% RB Mid	25 Pos 12	20.50	1	18.49	20.50	2	17.38
					100% RB	50 Pos 0	20.50	1	18.48	20.50	2	17.35
					1RB Low	1 Pos 0	20.50	1	18.43	20.50	2	17.33
					1RB Mid	1 Pos 24	20.50	1	18.48	20.50	2	17.42
					1RB High	1 Pos 49	20.50	0	19.65	20.50	1	18.92
					50% RB Low	25 Pos 0	20.50	0	19.68	20.50	1	18.88
		41490	2680	2680	50% RB Mid	25 Pos 12	20.50	0	19.45	20.50	1	18.82
					100% RB	50 Pos 0	20.50	1	18.67	20.50	2	17.62
					1RB Low	1 Pos 0	20.50	1	18.61	20.50	2	17.65
					1RB Mid	1 Pos 24	20.50	1	18.56	20.50	2	17.60
					1RB High	1 Pos 49	20.50	1	18.65	20.50	2	17.60

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM			
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	
LTE41	5.0 MHz	39750	2506	1RB Low	1 Pos 0	20.50	0	19.27	20.50	0	16.00	
				1RB Mid	1 Pos 12	20.50	0	19.34	20.50	0	15.84	
				1RB High	1 Pos 24	20.50	0	19.36	20.50	0	15.96	
				50% RB Low	12 Pos 0	20.50	1	18.25	20.50	0	15.62	
				50% RB Mid	12 Pos 6	20.50	1	18.31	20.50	0	15.58	
				50% RB High	12 Pos 11	20.50	1	18.27	20.50	0	15.72	
		40185	2549.5	2593	100% RB	25 Pos 0	20.50	1	18.32	20.50	0	15.62
					1RB Low	1 Pos 0	20.50	0	19.19	20.50	0	15.98
					1RB Mid	1 Pos 12	20.50	0	19.18	20.50	0	16.00
					1RB High	1 Pos 24	20.50	0	19.11	20.50	0	16.00
					50% RB Low	12 Pos 0	20.50	1	18.23	20.50	0	15.68
					50% RB Mid	12 Pos 6	20.50	1	18.16	20.50	0	15.74
		40620	2593	2636.5	50% RB High	12 Pos 11	20.50	1	18.13	20.50	0	15.74
					100% RB	25 Pos 0	20.50	1	18.17	20.50	0	15.74
					1RB Low	1 Pos 0	20.50	0	19.56	20.50	0	15.85
					1RB Mid	1 Pos 12	20.50	0	19.56	20.50	0	15.85
					1RB High	1 Pos 24	20.50	0	19.57	20.50	0	15.74
					50% RB Low	12 Pos 0	20.50	1	18.48	20.50	0	15.48
		41055	2636.5	2680	50% RB Mid	12 Pos 6	20.50	1	18.50	20.50	0	15.49
					50% RB High	12 Pos 11	20.50	1	18.44	20.50	0	15.51
					100% RB	25 Pos 0	20.50	1	18.52	20.50	0	15.49
					1RB Low	1 Pos 0	20.50	0	19.47	20.50	0	15.89
					1RB Mid	1 Pos 12	20.50	0	19.47	20.50	0	15.74
					1RB High	1 Pos 24	20.50	0	19.43	20.50	0	16.00
		41490	2680	2724	50% RB Low	12 Pos 0	20.50	1	18.46	20.50	0	15.65
					50% RB Mid	12 Pos 6	20.50	1	18.43	20.50	0	15.60
					50% RB High	12 Pos 11	20.50	1	18.42	20.50	0	15.60
					100% RB	25 Pos 0	20.50	1	18.44	20.50	0	15.64
					1RB Low	1 Pos 0	20.50	0	19.61	20.50	0	15.74
					1RB Mid	1 Pos 12	20.50	0	19.62	20.50	0	15.75
		41490	2680	2768	1RB High	1 Pos 24	20.50	0	19.50	20.50	0	15.68
					50% RB Low	12 Pos 0	20.50	1	18.65	20.50	0	15.53
					50% RB Mid	12 Pos 6	20.50	1	18.60	20.50	0	15.49
					50% RB High	12 Pos 11	20.50	1	18.58	20.50	0	15.55
					100% RB	25 Pos 0	20.50	1	18.60	20.50	0	15.44

B.4.2.18 LTE band 48 TDD – Antenna 8

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 48	20 MHz	55340	3560	1RB Low	1 Pos 0	18.00	0	17.22	18.00	0	16.44
				1RB Mid	1 Pos 50	18.00	0	17.39	18.00	0	16.63
				1RB High	1 Pos 99	18.00	0	17.21	18.00	0	16.44
				50% RB Low	50 Pos 0	18.00	1	16.40	18.00	1	15.37
				50% RB Mid	50 Pos 24	18.00	1	16.43	18.00	1	15.36
				50% RB High	50 Pos 50	18.00	1	16.40	18.00	1	15.33
		100% RB	100 Pos 0	18.00	1	16.33	18.00	1	15.28		
		55990	3625	1RB Low	1 Pos 0	18.00	0	17.23	18.00	0	16.44
				1RB Mid	1 Pos 50	18.00	0	17.46	18.00	0	16.62
				1RB High	1 Pos 99	18.00	0	17.39	18.00	0	16.59
				50% RB Low	50 Pos 0	18.00	1	16.39	18.00	1	15.32
				50% RB Mid	50 Pos 24	18.00	1	16.43	18.00	1	15.40
				50% RB High	50 Pos 50	18.00	1	16.41	18.00	1	15.38
		100% RB	100 Pos 0	18.00	1	16.40	18.00	1	15.36		
		56640	3690	1RB Low	1 Pos 0	18.00	0	17.13	18.00	0	16.36
				1RB Mid	1 Pos 50	18.00	0	17.17	18.00	0	16.41
				1RB High	1 Pos 99	18.00	0	16.87	18.00	0	16.14
				50% RB Low	50 Pos 0	18.00	1	16.17	18.00	1	15.19
	50% RB Mid			50 Pos 24	18.00	1	16.17	18.00	1	15.23	
	50% RB High			50 Pos 50	18.00	1	16.00	18.00	1	15.14	
	100% RB	100 Pos 0	18.00	1	16.13	18.00	1	15.15			
	15 MHz	55315	3557.5	1RB Low	1 Pos 0	18.00	0	17.43	18.00	1	16.96
				1RB Mid	1 Pos 38	18.00	0	17.47	18.00	1	17.00
				1RB High	1 Pos 74	18.00	0	17.42	18.00	1	16.94
				50% RB Low	38 Pos 0	18.00	1	16.31	18.00	2	15.32
				50% RB Mid	38 Pos 19	18.00	1	16.30	18.00	2	15.31
				50% RB High	38 Pos 39	18.00	1	16.29	18.00	2	15.28
		100% RB	75 Pos 0	18.00	1	16.32	18.00	2	15.31		
		55990	3625	1RB Low	1 Pos 0	18.00	0	17.38	18.00	1	16.78
				1RB Mid	1 Pos 38	18.00	0	17.47	18.00	1	16.88
				1RB High	1 Pos 74	18.00	0	17.42	18.00	1	16.83
				50% RB Low	38 Pos 0	18.00	1	16.37	18.00	2	15.37
				50% RB Mid	38 Pos 19	18.00	1	16.38	18.00	2	15.40
				50% RB High	38 Pos 39	18.00	1	16.40	18.00	2	15.38
		100% RB	75 Pos 0	18.00	1	16.41	18.00	2	15.36		
		56665	3692.5	1RB Low	1 Pos 0	18.00	0	17.33	18.00	1	16.78
				1RB Mid	1 Pos 38	18.00	0	17.47	18.00	1	16.89
				1RB High	1 Pos 74	18.00	0	17.27	18.00	1	16.77
				50% RB Low	38 Pos 0	18.00	1	16.35	18.00	2	15.41
	50% RB Mid			38 Pos 19	18.00	1	16.35	18.00	2	15.41	
	50% RB High			38 Pos 39	18.00	1	16.35	18.00	2	15.37	
	100% RB	75 Pos 0	18.00	1	16.34	18.00	2	15.33			
	10 MHz	55290	3555	1RB Low	1 Pos 0	18.00	0	17.40	18.00	1	16.69
				1RB Mid	1 Pos 24	18.00	0	17.55	18.00	1	16.86
				1RB High	1 Pos 49	18.00	0	17.50	18.00	1	16.81
				50% RB Low	25 Pos 0	18.00	1	16.40	18.00	2	15.39
				50% RB Mid	25 Pos 12	18.00	1	16.41	18.00	2	15.40
				50% RB High	25 Pos 25	18.00	1	16.41	18.00	2	15.41
100% RB		50 Pos0	18.00	1	16.43	18.00	2	15.38			
55990		3625	1RB Low	1 Pos 0	18.00	0	17.38	18.00	1	16.33	
			1RB Mid	1 Pos 24	18.00	0	17.47	18.00	1	16.44	
			1RB High	1 Pos 49	18.00	0	17.48	18.00	1	16.43	
			50% RB Low	25 Pos 0	18.00	1	16.38	18.00	2	15.38	
			50% RB Mid	25 Pos 12	18.00	1	16.40	18.00	2	15.41	
			50% RB High	25 Pos 25	18.00	1	16.44	18.00	2	15.42	
100% RB		50 Pos0	18.00	1	16.43	18.00	2	15.41			
56690		3695	1RB Low	1 Pos 0	18.00	0	17.24	18.00	1	16.48	
			1RB Mid	1 Pos 24	18.00	0	17.42	18.00	1	16.67	
			1RB High	1 Pos 49	18.00	0	17.36	18.00	1	16.62	
			50% RB Low	25 Pos 0	18.00	1	16.36	18.00	2	15.32	
	50% RB Mid		25 Pos 12	18.00	1	16.38	18.00	2	15.37		
	50% RB High		25 Pos 25	18.00	1	16.40	18.00	2	15.36		
100% RB	50 Pos0	18.00	1	16.40	18.00	2	15.39				

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 48	5 MHz	55265	3552.5	1RB Low	1 Pos 0	18.00	0	17.11	18.00	1	16.25
				1RB Mid	1 Pos 12	18.00	0	17.09	18.00	1	16.25
				1RB High	1 Pos 24	18.00	0	16.90	18.00	1	16.06
				50% RB Low	12 Pos 0	18.00	1	16.04	18.00	2	15.24
				50% RB Mid	12 Pos 6	18.00	1	16.08	18.00	2	15.24
				50% RB High	12 Pos 11	18.00	1	16.02	18.00	2	15.14
				100% RB	25 Pos 0	18.00	1	16.09	18.00	2	15.11
		55990	3625	1RB Low	1 Pos 0	18.00	0	17.13	18.00	1	16.20
				1RB Mid	1 Pos 12	18.00	0	17.15	18.00	1	16.24
				1RB High	1 Pos 24	18.00	0	16.99	18.00	1	16.09
				50% RB Low	12 Pos 0	18.00	1	16.08	18.00	2	15.20
				50% RB Mid	12 Pos 6	18.00	1	16.07	18.00	2	15.11
				50% RB High	12 Pos 11	18.00	1	16.01	18.00	2	15.06
				100% RB	25 Pos 0	18.00	1	16.10	18.00	2	15.14
		56715	3697.5	1RB Low	1 Pos 0	18.00	0	17.06	18.00	1	16.34
				1RB Mid	1 Pos 12	18.00	0	17.11	18.00	1	16.34
				1RB High	1 Pos 24	18.00	0	17.01	18.00	1	16.28
				50% RB Low	12 Pos 0	18.00	1	16.04	18.00	2	15.00
				50% RB Mid	12 Pos 6	18.00	1	16.03	18.00	2	15.05
				50% RB High	12 Pos 11	18.00	1	16.00	18.00	2	15.00
				100% RB	25 Pos 0	18.00	1	16.05	18.00	2	15.13

B.4.2.19 LTE band 66 FDD – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE66	20 MHz	132072	1720	1RB Low	1 Pos 0	17.50	0	17.11	17.50	1	16.30
				1RB Mid	1 Pos 50	17.50	0	17.14	17.50	1	16.37
				1RB High	1 Pos 99	17.50	0	16.89	17.50	1	16.13
				50% RB Low	50 Pos 0	17.50	1	16.12	17.50	2	15.11
				50% RB Mid	50 Pos 24	17.50	1	16.12	17.50	2	15.11
				50% RB High	50 Pos 50	17.50	1	16.07	17.50	2	15.05
		100% RB	100 Pos 0	17.50	1	16.05	17.50	2	15.02		
		132322	1745	1RB Low	1 Pos 0	17.50	0	16.93	17.50	1	16.07
				1RB Mid	1 Pos 50	17.50	0	17.00	17.50	1	16.20
				1RB High	1 Pos 99	17.50	0	16.89	17.50	1	16.08
				50% RB Low	50 Pos 0	17.50	1	16.08	17.50	2	15.04
				50% RB Mid	50 Pos 24	17.50	1	16.00	17.50	2	14.99
				50% RB High	50 Pos 50	17.50	1	15.93	17.50	2	14.91
		100% RB	100 Pos 0	17.50	1	16.01	17.50	2	14.96		
		132572	1770	1RB Low	1 Pos 0	17.50	0	16.88	17.50	1	16.09
				1RB Mid	1 Pos 50	17.50	0	17.04	17.50	1	16.27
				1RB High	1 Pos 99	17.50	0	16.86	17.50	1	16.04
				50% RB Low	50 Pos 0	17.50	1	16.01	17.50	2	15.00
	50% RB Mid			50 Pos 24	17.50	1	16.01	17.50	2	14.99	
	50% RB High			50 Pos 50	17.50	1	16.02	17.50	2	15.00	
	100% RB	100 Pos 0	17.50	1	15.97	17.50	2	14.93			
	15 MHz	132047	1717.5	1RB Low	1 Pos 0	17.50	0	17.09	17.50	1	16.38
				1RB Mid	1 Pos 38	17.50	0	17.10	17.50	1	16.40
				1RB High	1 Pos 74	17.50	0	16.95	17.50	1	16.25
				50% RB Low	38 Pos 0	17.50	1	16.06	17.50	2	15.03
				50% RB Mid	38 Pos 19	17.50	1	16.07	17.50	2	15.07
				50% RB High	38 Pos 39	17.50	1	16.06	17.50	2	15.03
		100% RB	75 Pos 0	17.50	1	16.07	17.50	2	15.05		
		132422	1755	1RB Low	1 Pos 0	17.50	0	16.92	17.50	1	16.20
				1RB Mid	1 Pos 38	17.50	0	16.94	17.50	1	16.25
				1RB High	1 Pos 74	17.50	0	16.86	17.50	1	16.16
				50% RB Low	38 Pos 0	17.50	1	16.01	17.50	2	14.99
				50% RB Mid	38 Pos 19	17.50	1	15.95	17.50	2	14.96
				50% RB High	38 Pos 39	17.50	1	15.94	17.50	2	14.91
		100% RB	75 Pos 0	17.50	1	15.98	17.50	2	14.96		
		132597	1772.5	1RB Low	1 Pos 0	17.50	0	16.96	17.50	1	16.24
				1RB Mid	1 Pos 38	17.50	0	17.01	17.50	1	16.27
				1RB High	1 Pos 74	17.50	0	16.92	17.50	1	16.21
				50% RB Low	38 Pos 0	17.50	1	15.98	17.50	2	14.95
	50% RB Mid			38 Pos 19	17.50	1	15.98	17.50	2	14.99	
	50% RB High			38 Pos 39	17.50	1	15.95	17.50	2	14.93	
	100% RB	75 Pos 0	17.50	1	15.98	17.50	2	14.96			
	10 MHz	132022	1715	1RB Low	1 Pos 0	17.50	0	17.17	17.50	1	16.45
				1RB Mid	1 Pos 24	17.50	0	17.19	17.50	1	16.46
				1RB High	1 Pos 49	17.50	0	17.06	17.50	1	16.33
				50% RB Low	25 Pos 0	17.50	1	16.12	17.50	2	15.15
				50% RB Mid	25 Pos 12	17.50	1	16.15	17.50	2	15.22
				50% RB High	25 Pos 24	17.50	1	16.15	17.50	2	15.22
100% RB		50 Pos 0	17.50	1	16.15	17.50	2	15.13			
132422		1755	1RB Low	1 Pos 0	17.50	0	16.99	17.50	1	16.25	
			1RB Mid	1 Pos 24	17.50	0	17.03	17.50	1	16.29	
			1RB High	1 Pos 49	17.50	0	16.95	17.50	1	16.22	
			50% RB Low	25 Pos 0	17.50	1	16.05	17.50	2	15.12	
			50% RB Mid	25 Pos 12	17.50	1	15.96	17.50	2	15.03	
			50% RB High	25 Pos 24	17.50	1	15.95	17.50	2	15.00	
100% RB		50 Pos 0	17.50	1	16.01	17.50	2	15.00			
132622		1775	1RB Low	1 Pos 0	17.50	0	17.01	17.50	1	16.30	
			1RB Mid	1 Pos 24	17.50	0	17.04	17.50	1	16.30	
			1RB High	1 Pos 49	17.50	0	16.97	17.50	1	16.26	
			50% RB Low	25 Pos 0	17.50	1	15.95	17.50	2	15.04	
	50% RB Mid		25 Pos 12	17.50	1	15.97	17.50	2	15.03		
	50% RB High		25 Pos 24	17.50	1	15.95	17.50	2	15.03		
100% RB	50 Pos 0	17.50	1	15.99	17.50	2	14.99				

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE66	5.0 MHz	131997	1712.5	1RB Low	1 Pos 0	17.50	0	17.24	17.50	1	16.47
				1RB Mid	1 Pos 12	17.50	0	17.28	17.50	1	16.50
				1RB High	1 Pos 24	17.50	0	17.19	17.50	1	16.42
				50% RB Low	12 Pos 0	17.50	1	16.11	17.50	2	15.09
				50% RB Mid	12 Pos 6	17.50	1	16.14	17.50	2	15.10
				50% RB High	12 Pos 11	17.50	1	16.16	17.50	2	15.11
		100% RB	25 Pos 0	17.50	1	16.16	17.50	2	15.18		
		1RB Low	1 Pos 0	17.50	0	16.97	17.50	1	16.23		
		1RB Mid	1 Pos 12	17.50	0	17.03	17.50	1	16.32		
		1RB High	1 Pos 24	17.50	0	16.95	17.50	1	16.22		
		50% RB Low	12 Pos 0	17.50	1	15.98	17.50	2	15.00		
		50% RB Mid	12 Pos 6	17.50	1	15.95	17.50	2	14.97		
		50% RB High	12 Pos 11	17.50	1	15.89	17.50	2	14.93		
		100% RB	25 Pos 0	17.50	1	15.99	17.50	2	14.97		
		1RB Low	1 Pos 0	17.50	0	17.08	17.50	1	16.29		
		1RB Mid	1 Pos 12	17.50	0	17.12	17.50	1	16.32		
		1RB High	1 Pos 24	17.50	0	17.07	17.50	1	16.30		
		50% RB Low	12 Pos 0	17.50	1	16.01	17.50	2	14.97		
		50% RB Mid	12 Pos 6	17.50	1	16.00	17.50	2	14.99		
		50% RB High	12 Pos 11	17.50	1	15.99	17.50	2	14.93		
		100% RB	25 Pos 0	17.50	1	16.00	17.50	2	15.02		
		1RB Low	1 Pos 0	17.50	0	17.14	17.50	1	16.44		
		1RB Mid	1 Pos 7	17.50	0	17.14	17.50	1	16.50		
		1RB High	1 Pos 14	17.50	0	17.06	17.50	1	16.40		
		50% RB Low	8 Pos 0	17.50	1	16.09	17.50	2	15.11		
		50% RB Mid	8 Pos 4	17.50	1	16.12	17.50	2	15.14		
		50% RB High	8 Pos 7	17.50	1	16.11	17.50	2	15.14		
		100% RB	15 Pos 0	17.50	1	16.17	17.50	2	15.10		
		1RB Low	1 Pos 0	17.50	0	16.95	17.50	1	16.25		
		1RB Mid	1 Pos 7	17.50	0	16.97	17.50	1	16.28		
	1RB High	1 Pos 14	17.50	0	16.89	17.50	1	16.19			
	50% RB Low	8 Pos 0	17.50	1	15.92	17.50	2	14.94			
	50% RB Mid	8 Pos 4	17.50	1	15.94	17.50	2	14.97			
	50% RB High	8 Pos 7	17.50	1	15.91	17.50	2	14.92			
	100% RB	15 Pos 0	17.50	1	15.95	17.50	2	14.88			
	1RB Low	1 Pos 0	17.50	0	16.95	17.50	1	16.24			
	1RB Mid	1 Pos 7	17.50	0	17.02	17.50	1	16.31			
	1RB High	1 Pos 14	17.50	0	16.90	17.50	1	16.23			
	50% RB Low	8 Pos 0	17.50	1	15.97	17.50	2	15.00			
	50% RB Mid	8 Pos 4	17.50	1	15.97	17.50	2	15.00			
	50% RB High	8 Pos 7	17.50	1	15.96	17.50	2	14.98			
	100% RB	15 Pos 0	17.50	1	15.98	17.50	2	14.92			
	1RB Low	1 Pos 0	17.50	0	17.24	17.50	1	16.20			
	1RB Mid	1 Pos 2	17.50	0	17.27	17.50	1	16.24			
	1RB High	1 Pos 5	17.50	0	17.23	17.50	1	16.18			
	50% RB Low	3 Pos 0	17.50	0	17.14	17.50	1	16.27			
	50% RB Mid	3 Pos 1	17.50	0	17.11	17.50	1	16.26			
	50% RB High	3 Pos 2	17.50	0	17.11	17.50	1	16.29			
	100% RB	6 Pos 0	17.50	1	16.08	17.50	2	15.12			
	1RB Low	1 Pos 0	17.50	0	17.08	17.50	1	16.01			
	1RB Mid	1 Pos 2	17.50	0	17.09	17.50	1	16.10			
	1RB High	1 Pos 5	17.50	0	17.03	17.50	1	16.00			
	50% RB Low	3 Pos 0	17.50	0	16.97	17.50	1	16.10			
	50% RB Mid	3 Pos 1	17.50	0	16.95	17.50	1	16.08			
	50% RB High	3 Pos 2	17.50	0	16.96	17.50	1	16.14			
	100% RB	6 Pos 0	17.50	1	15.94	17.50	2	14.94			
	1RB Low	1 Pos 0	17.50	0	17.10	17.50	1	16.00			
	1RB Mid	1 Pos 2	17.50	0	17.10	17.50	1	16.06			
	1RB High	1 Pos 5	17.50	0	17.10	17.50	1	16.02			
	50% RB Low	3 Pos 0	17.50	0	17.01	17.50	1	16.14			
	50% RB Mid	3 Pos 1	17.50	0	17.02	17.50	1	16.13			
	50% RB High	3 Pos 2	17.50	0	17.02	17.50	1	16.17			
	100% RB	6 Pos 0	17.50	1	15.98	17.50	2	15.02			

B.4.2.20 LTE band 66 FDD – Antenna 8

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE66	20 MHz	132072	1720	1RB Low	1 Pos 0	19.50	0	18.81	19.50	1	18.02
				1RB Mid	1 Pos 50	19.50	0	18.89	19.50	1	18.22
				1RB High	1 Pos 99	19.50	0	18.73	19.50	1	18.00
				50% RB Low	50 Pos 0	19.50	1	17.88	19.50	2	16.87
				50% RB Mid	50 Pos 24	19.50	1	17.89	19.50	2	16.85
				50% RB High	50 Pos 50	19.50	1	17.90	19.50	2	16.90
		100% RB	100 Pos 0	19.50	1	17.88	19.50	2	16.89		
		132322	1745	1RB Low	1 Pos 0	19.50	0	18.74	19.50	1	18.32
				1RB Mid	1 Pos 50	19.50	0	19.07	19.50	1	18.42
				1RB High	1 Pos 99	19.50	0	18.74	19.50	1	18.25
				50% RB Low	50 Pos 0	19.50	1	17.97	19.50	2	16.99
				50% RB Mid	50 Pos 24	19.50	1	17.90	19.50	2	16.87
				50% RB High	50 Pos 50	19.50	1	17.88	19.50	2	16.84
		100% RB	100 Pos 0	19.50	1	17.92	19.50	2	16.93		
		132572	1770	1RB Low	1 Pos 0	19.50	0	18.80	19.50	1	18.01
				1RB Mid	1 Pos 50	19.50	0	18.88	19.50	1	18.06
				1RB High	1 Pos 99	19.50	0	18.67	19.50	1	17.90
				50% RB Low	50 Pos 0	19.50	1	17.75	19.50	2	16.75
	50% RB Mid			50 Pos 24	19.50	1	17.83	19.50	2	16.83	
	50% RB High			50 Pos 50	19.50	1	17.72	19.50	2	16.69	
	100% RB	100 Pos 0	19.50	1	17.71	19.50	2	16.71			
	15 MHz	132047	1717.5	1RB Low	1 Pos 0	19.50	0	18.73	19.50	1	18.34
				1RB Mid	1 Pos 38	19.50	0	18.77	19.50	1	18.41
				1RB High	1 Pos 74	19.50	0	18.73	19.50	1	18.34
				50% RB Low	38 Pos 0	19.50	1	17.80	19.50	2	16.78
				50% RB Mid	38 Pos 19	19.50	1	17.82	19.50	2	16.78
				50% RB High	38 Pos 39	19.50	1	17.83	19.50	2	16.85
		100% RB	75 Pos 0	19.50	1	17.81	19.50	2	16.83		
		132422	1755	1RB Low	1 Pos 0	19.50	0	18.80	19.50	1	18.22
				1RB Mid	1 Pos 38	19.50	0	18.85	19.50	1	18.29
				1RB High	1 Pos 74	19.50	0	18.77	19.50	1	18.15
				50% RB Low	38 Pos 0	19.50	1	17.85	19.50	2	16.90
				50% RB Mid	38 Pos 19	19.50	1	17.82	19.50	2	16.84
				50% RB High	38 Pos 39	19.50	1	17.78	19.50	2	16.83
		100% RB	75 Pos 0	19.50	1	17.85	19.50	2	16.84		
		132597	1772.5	1RB Low	1 Pos 0	19.50	0	18.85	19.50	1	18.00
				1RB Mid	1 Pos 38	19.50	0	18.84	19.50	1	18.00
				1RB High	1 Pos 74	19.50	0	18.75	19.50	1	17.89
				50% RB Low	38 Pos 0	19.50	1	17.79	19.50	2	16.83
	50% RB Mid			38 Pos 19	19.50	1	17.81	19.50	2	16.80	
	50% RB High			38 Pos 39	19.50	1	17.74	19.50	2	16.72	
	100% RB	75 Pos 0	19.50	1	17.80	19.50	2	16.79			
	10 MHz	132022	1715	1RB Low	1 Pos 0	19.50	0	18.80	19.50	1	18.35
				1RB Mid	1 Pos 24	19.50	0	18.82	19.50	1	18.40
				1RB High	1 Pos 49	19.50	0	18.80	19.50	1	18.35
				50% RB Low	25 Pos 0	19.50	1	17.84	19.50	2	16.92
				50% RB Mid	25 Pos 12	19.50	1	17.86	19.50	2	16.89
				50% RB High	25 Pos 24	19.50	1	17.86	19.50	2	16.89
100% RB		50 Pos 0	19.50	1	17.89	19.50	2	16.83			
132422		1755	1RB Low	1 Pos 0	19.50	0	18.82	19.50	1	17.82	
			1RB Mid	1 Pos 24	19.50	0	18.90	19.50	1	17.86	
			1RB High	1 Pos 49	19.50	0	18.84	19.50	1	17.84	
			50% RB Low	25 Pos 0	19.50	1	17.92	19.50	2	17.01	
			50% RB Mid	25 Pos 12	19.50	1	17.82	19.50	2	16.92	
			50% RB High	25 Pos 24	19.50	1	17.82	19.50	2	16.93	
100% RB		50 Pos 0	19.50	1	17.88	19.50	2	16.88			
132622		1775	1RB Low	1 Pos 0	19.50	0	18.86	19.50	1	17.98	
			1RB Mid	1 Pos 24	19.50	0	18.83	19.50	1	17.94	
			1RB High	1 Pos 49	19.50	0	18.75	19.50	1	17.90	
			50% RB Low	25 Pos 0	19.50	1	17.80	19.50	2	16.86	
	50% RB Mid		25 Pos 12	19.50	1	17.77	19.50	2	16.80		
	50% RB High		25 Pos 24	19.50	1	17.71	19.50	2	16.71		
100% RB	50 Pos 0	19.50	1	17.77	19.50	2	16.77				

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE66	5.0 MHz	131997	1712.5	1RB Low	1 Pos 0	19.50	0	18.77	19.50	1	18.33
				1RB Mid	1 Pos 12	19.50	0	18.77	19.50	1	18.36
				1RB High	1 Pos 24	19.50	0	18.72	19.50	1	18.33
				50% RB Low	12 Pos 0	19.50	1	17.74	19.50	2	16.98
				50% RB Mid	12 Pos 6	19.50	1	17.76	19.50	2	16.97
				50% RB High	12 Pos 11	19.50	1	17.77	19.50	2	17.00
		100% RB	25 Pos 0	19.50	1	17.78	19.50	2	16.88		
		1RB Low	1 Pos 0	19.50	0	18.82	19.50	1	18.43		
		1RB Mid	1 Pos 12	19.50	0	18.79	19.50	1	18.40		
		1RB High	1 Pos 24	19.50	0	18.72	19.50	1	18.35		
		50% RB Low	12 Pos 0	19.50	1	17.77	19.50	2	16.96		
		50% RB Mid	12 Pos 6	19.50	1	17.75	19.50	2	16.95		
		50% RB High	12 Pos 11	19.50	1	17.77	19.50	2	16.96		
		100% RB	25 Pos 0	19.50	1	17.75	19.50	2	16.85		
		1RB Low	1 Pos 0	19.50	0	18.77	19.50	1	18.34		
		1RB Mid	1 Pos 12	19.50	0	18.75	19.50	1	18.34		
		1RB High	1 Pos 24	19.50	0	18.69	19.50	1	18.32		
		50% RB Low	12 Pos 0	19.50	1	17.76	19.50	2	16.98		
	50% RB Mid	12 Pos 6	19.50	1	17.75	19.50	2	16.96			
	50% RB High	12 Pos 11	19.50	1	17.72	19.50	2	16.93			
	100% RB	25 Pos 0	19.50	1	17.74	19.50	2	16.85			
	1RB Low	1 Pos 0	19.50	0	18.89	19.50	1	17.73			
	1RB Mid	1 Pos 7	19.50	0	18.88	19.50	1	17.74			
	1RB High	1 Pos 14	19.50	0	18.86	19.50	1	17.74			
	50% RB Low	8 Pos 0	19.50	1	17.80	19.50	2	16.80			
	50% RB Mid	8 Pos 4	19.50	1	17.82	19.50	2	16.82			
	50% RB High	8 Pos 7	19.50	1	17.81	19.50	2	16.81			
	100% RB	15 Pos 0	19.50	1	17.81	19.50	2	16.87			
	1RB Low	1 Pos 0	19.50	0	18.81	19.50	1	17.89			
	1RB Mid	1 Pos 7	19.50	0	18.88	19.50	1	17.95			
	1RB High	1 Pos 14	19.50	0	18.86	19.50	1	17.90			
	50% RB Low	8 Pos 0	19.50	1	17.83	19.50	2	16.78			
	50% RB Mid	8 Pos 4	19.50	1	17.78	19.50	2	16.78			
	50% RB High	8 Pos 7	19.50	1	17.77	19.50	2	16.72			
	100% RB	15 Pos 0	19.50	1	17.84	19.50	2	16.85			
	1RB Low	1 Pos 0	19.50	0	18.80	19.50	1	18.09			
	1RB Mid	1 Pos 7	19.50	0	18.82	19.50	1	18.10			
	1RB High	1 Pos 14	19.50	0	18.82	19.50	1	18.09			
	50% RB Low	8 Pos 0	19.50	1	17.85	19.50	2	16.86			
	50% RB Mid	8 Pos 4	19.50	1	17.81	19.50	2	16.79			
	50% RB High	8 Pos 7	19.50	1	17.73	19.50	2	16.77			
	100% RB	15 Pos 0	19.50	1	17.80	19.50	2	16.78			
	1RB Low	1 Pos 0	19.50	0	18.77	19.50	1	18.33			
	1RB Mid	1 Pos 2	19.50	0	18.77	19.50	1	18.36			
	1RB High	1 Pos 5	19.50	0	18.72	19.50	1	18.33			
	50% RB Low	3 Pos 0	19.50	1	17.74	19.50	2	16.98			
	50% RB Mid	3 Pos 1	19.50	1	17.76	19.50	2	16.97			
	50% RB High	3 Pos 2	19.50	1	17.77	19.50	2	17.00			
	100% RB	6 Pos 0	19.50	1	17.78	19.50	2	16.88			
	1RB Low	1 Pos 0	19.50	0	18.82	19.50	1	18.43			
	1RB Mid	1 Pos 2	19.50	0	18.79	19.50	1	18.40			
	1RB High	1 Pos 5	19.50	0	18.72	19.50	1	18.35			
	50% RB Low	3 Pos 0	19.50	1	17.77	19.50	2	16.96			
	50% RB Mid	3 Pos 1	19.50	1	17.75	19.50	2	16.95			
	50% RB High	3 Pos 2	19.50	1	17.77	19.50	2	16.96			
	100% RB	6 Pos 0	19.50	1	17.75	19.50	2	16.85			
	1RB Low	1 Pos 0	19.50	0	18.77	19.50	1	18.34			
	1RB Mid	1 Pos 2	19.50	0	18.75	19.50	1	18.34			
	1RB High	1 Pos 5	19.50	0	18.69	19.50	1	18.32			
	50% RB Low	3 Pos 0	19.50	1	17.76	19.50	2	16.98			
	50% RB Mid	3 Pos 1	19.50	1	17.75	19.50	2	16.96			
	50% RB High	3 Pos 2	19.50	1	17.72	19.50	2	16.93			
	100% RB	6 Pos 0	19.50	1	17.74	19.50	2	16.85			

B.4.2.21 LTE band 71 FDD – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE71	20 MHz	133222	673	1RB Low	1 Pos 0	23.00	0	22.06	23.00	1	21.33
				1RB Mid	1 Pos 50	23.00	0	22.27	23.00	1	21.51
				1RB High	1 Pos 99	23.00	0	22.25	23.00	1	21.52
				50% RB Low	50 Pos 0	23.00	1	21.16	23.00	2	20.16
				50% RB Mid	50 Pos 24	23.00	1	21.31	23.00	2	20.26
				50% RB High	50 Pos 50	23.00	1	21.22	23.00	2	20.33
		100% RB	100 Pos 0	23.00	1	21.16	23.00	2	20.15		
		133297	680.5	1RB Low	1 Pos 0	23.00	0	22.17	23.00	1	21.41
				1RB Mid	1 Pos 50	23.00	0	22.42	23.00	1	21.64
				1RB High	1 Pos 99	23.00	0	22.31	23.00	1	21.50
				50% RB Low	50 Pos 0	23.00	1	21.41	23.00	2	20.39
				50% RB Mid	50 Pos 24	23.00	1	21.40	23.00	2	20.39
				50% RB High	50 Pos 50	23.00	1	21.51	23.00	2	20.46
		100% RB	100 Pos 0	23.00	1	21.46	23.00	2	20.42		
		133372	688	1RB Low	1 Pos 0	23.00	0	22.27	23.00	1	21.54
				1RB Mid	1 Pos 50	23.00	0	22.37	23.00	1	21.66
				1RB High	1 Pos 99	23.00	0	22.22	23.00	1	21.52
				50% RB Low	50 Pos 0	23.00	1	21.30	23.00	2	20.33
	50% RB Mid			50 Pos 24	23.00	1	21.35	23.00	2	20.40	
	50% RB High			50 Pos 50	23.00	1	21.25	23.00	2	20.32	
	100% RB	100 Pos 0	23.00	1	21.29	23.00	2	20.28			
	15 MHz	133197	670.5	1RB Low	1 Pos 0	23.00	0	22.15	23.00	1	21.06
				1RB Mid	1 Pos 38	23.00	0	22.28	23.00	1	21.14
				1RB High	1 Pos 74	23.00	0	22.27	23.00	1	21.14
				50% RB Low	38 Pos 0	23.00	1	21.22	23.00	2	20.25
				50% RB Mid	38 Pos 19	23.00	1	21.25	23.00	2	20.22
				50% RB High	38 Pos 39	23.00	1	21.35	23.00	2	20.36
		100% RB	75 Pos 0	23.00	1	21.26	23.00	2	20.21		
		133297	680.5	1RB Low	1 Pos 0	23.00	0	22.07	23.00	1	21.26
				1RB Mid	1 Pos 38	23.00	0	22.19	23.00	1	21.32
				1RB High	1 Pos 74	23.00	0	22.17	23.00	1	21.38
				50% RB Low	38 Pos 0	23.00	1	21.15	23.00	2	20.12
				50% RB Mid	38 Pos 19	23.00	1	21.17	23.00	2	20.17
				50% RB High	38 Pos 39	23.00	1	21.22	23.00	2	20.23
		100% RB	75 Pos 0	23.00	1	21.20	23.00	2	20.20		
		133397	690.5	1RB Low	1 Pos 0	23.00	0	22.29	23.00	1	21.42
				1RB Mid	1 Pos 38	23.00	0	22.40	23.00	1	21.53
				1RB High	1 Pos 74	23.00	0	22.35	23.00	1	21.48
				50% RB Low	38 Pos 0	23.00	1	21.42	23.00	2	20.44
	50% RB Mid			38 Pos 19	23.00	1	21.36	23.00	2	20.33	
	50% RB High			38 Pos 39	23.00	1	21.30	23.00	2	20.32	
	100% RB	75 Pos 0	23.00	1	21.41	23.00	2	20.41			
	10 MHz	133172	668	1RB Low	1 Pos 0	23.00	0	22.18	23.00	1	21.33
				1RB Mid	1 Pos 24	23.00	0	22.32	23.00	1	21.50
				1RB High	1 Pos 49	23.00	0	22.29	23.00	1	21.42
				50% RB Low	25 Pos 0	23.00	1	21.37	23.00	2	20.44
				50% RB Mid	25 Pos 12	23.00	1	21.31	23.00	2	20.38
				50% RB High	25 Pos 24	23.00	1	21.36	23.00	2	20.44
100% RB		50 Pos 0	23.00	1	21.33	23.00	2	20.27			
133297		680.5	1RB Low	1 Pos 0	23.00	0	22.28	23.00	1	21.68	
			1RB Mid	1 Pos 24	23.00	0	22.34	23.00	1	21.69	
			1RB High	1 Pos 49	23.00	0	22.26	23.00	1	21.63	
			50% RB Low	25 Pos 0	23.00	1	21.23	23.00	2	20.27	
			50% RB Mid	25 Pos 12	23.00	1	21.31	23.00	2	20.31	
			50% RB High	25 Pos 24	23.00	1	21.30	23.00	2	20.29	
100% RB		50 Pos 0	23.00	1	21.28	23.00	2	20.28			
133422		693	1RB Low	1 Pos 0	23.00	0	22.39	23.00	1	21.77	
			1RB Mid	1 Pos 24	23.00	0	22.41	23.00	1	21.79	
			1RB High	1 Pos 49	23.00	0	22.35	23.00	1	21.74	
			50% RB Low	25 Pos 0	23.00	1	21.40	23.00	2	20.36	
	50% RB Mid		25 Pos 12	23.00	1	21.31	23.00	2	20.32		
	50% RB High		25 Pos 24	23.00	1	21.29	23.00	2	20.32		
100% RB	50 Pos 0	23.00	1	21.35	23.00	2	20.37				

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE71	5.0 MHz	133147	665.5	1RB Low	1 Pos 0	23.00	0	22.17	23.00	1	21.47
				1RB Mid	1 Pos 12	23.00	0	22.24	23.00	1	21.56
				1RB High	1 Pos 24	23.00	0	22.21	23.00	1	21.58
				50% RB Low	12 Pos 0	23.00	1	21.19	23.00	2	20.20
				50% RB Mid	12 Pos 6	23.00	1	21.26	23.00	2	20.25
				50% RB High	12 Pos 11	23.00	1	21.20	23.00	2	20.18
				100% RB	25 Pos 0	23.00	1	21.22	23.00	2	20.21
		133297	680.5	1RB Low	1 Pos 0	23.00	0	22.43	23.00	1	21.72
				1RB Mid	1 Pos 12	23.00	0	22.45	23.00	1	21.70
				1RB High	1 Pos 24	23.00	0	22.41	23.00	1	21.69
				50% RB Low	12 Pos 0	23.00	1	21.40	23.00	2	20.41
				50% RB Mid	12 Pos 6	23.00	1	21.36	23.00	2	20.32
				50% RB High	12 Pos 11	23.00	1	21.34	23.00	2	20.26
				100% RB	25 Pos 0	23.00	1	21.38	23.00	2	20.39
		133447	695.5	1RB Low	1 Pos 0	23.00	0	22.36	23.00	1	21.88
				1RB Mid	1 Pos 12	23.00	0	22.39	23.00	1	21.91
				1RB High	1 Pos 24	23.00	0	22.40	23.00	1	21.89
				50% RB Low	12 Pos 0	23.00	1	21.29	23.00	2	20.33
				50% RB Mid	12 Pos 6	23.00	1	21.30	23.00	2	20.27
				50% RB High	12 Pos 11	23.00	1	21.28	23.00	2	20.30
				100% RB	25 Pos 0	23.00	1	21.34	23.00	2	20.32

B.4.3 LTE UL Carrier Aggregation

B.4.3.1 Intra-Band Contiguous

UL CA shall be tested based on the worst-case SAR configuration determined from non-CA SAR testing result. The UL CA mode power measurements represent the total power across both carriers.

According to November 2017 TCB workshop, the following needs to be performed: The maximum measured output power, RB allocation, CC offsets, CC channel BWs, MPR, modulation and other relevant information for all UL CA SAR configurations are required in SAR reports to support the test setup and results, including explanations, call box configurations and certain testing restriction

1) When the maximum output for UL CA is \leq standalone LTE mode

- The primary carrier is configured according to the highest standalone SAR configuration tested
- The secondary carrier and subsequent CCs are configured according to procedures used for power measurement and parameters similar to that used for the PCC

2) When the Reported SAR for UL CA configuration, is > 1.2 W/kg, UL CA SAR is also required for all the other test channels

B.4.3.2 LTE CA 5B – Antenna 5:

Band	Modulation / BW	PCC			SCC			Pwr Avg (dBm)	Factory Upper Tolerance (dBm)
		Ch	Freq (MHz)	RB Allocation	Ch	Freq (MHz)	RB Allocation		
LTE 5B	QPSK / 10MHz	26775	822.5	1RB High	20476	831.6	1RB Low	21.03	21.50

B.4.3.3 LTE CA 7C – Antenna 8:

Band	Modulation / BW	PCC			SCC			Pwr Avg (dBm)	Factory Upper Tolerance (dBm)
		Ch	Freq (MHz)	RB Allocation	Ch	Freq (MHz)	RB Allocation		
LTE 7C	QPSK / 20MHz	21100	2535	1RB High	21100	2535	1RB Low	19.87	20.00

B.4.3.4 LTE CA 38C – Antenna 5:

SAR Measurement for LTE Band 38 TDD (Frequency range: 2570 – 2620MHz) is covered by LTE Band 41 TDD (Frequency range: 2496 – 2690MHz) due to overlapping frequency range, same maximum tune-up, and same bandwidth.

B.4.3.5 LTE CA 41C – Antenna 8:

Band	Modulation / BW	PCC			SCC			Pwr Avg (dBm)	Factory Upper Tolerance (dBm)
		Ch	Freq (MHz)	RB Allocation	Ch	Freq (MHz)	RB Allocation		
LTE 41C	QPSK / 20MHz	40521	2583.1	1RB High	40719	2602.9	1RB Low	20.04	20.50

B.4.3.6 LTE CA 48C – Antenna 8:

Band	Modulation / BW	PCC			SCC			Pwr Avg (dBm)	Factory Upper Tolerance (dBm)
		Ch	Freq (MHz)	RB Allocation	Ch	Freq (MHz)	RB Allocation		
LTE 48C	QPSK / 20MHz	55891	3615.1	1RB High	56089	3634.9	1RB Low	17.54	18.00

B.4.3.7 LTE CA 66B, 66C – Antenna 8:

Band	Modulation / BW	PCC			SCC			Pwr Avg (dBm)	Factory Upper Tolerance (dBm)
		Ch	Freq (MHz)	RB Allocation	Ch	Freq (MHz)	RB Allocation		
LTE 66B	QPSK / 10MHz	132373	1750.1	1RB High	132472	1760	1RB Low	18.72	19.50
LTE 66C	QPSK / 20MHz	132323	1745.1	1RB High	132521	1764.9	1RB Low	18.73	19.50

B.4.4 5G NR (FR1)

B.4.4.1 5G NR (FR1) band 2 FDD – Antenna 8

Band	BW (MHz)	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm)			
							Frequency (MHz) / Channel			
							1860	1880	1900	
NR2	20	DFS-s OFDM	PI/2 BPSK	1RB Mid	50	19.00	18.57	18.70	18.92	
			QPSK	1RB Low	0	19.00	18.51	18.59	18.67	
				1RB Mid	50	19.00	18.69	18.93	18.95	
				1RB High	99	19.00	18.51	18.59	18.67	
				50% RB Low	0	19.00	18.59	18.73	18.94	
				50% RB Mid	25	19.00	18.59	18.84	18.80	
				50% RB High	49	19.00	18.68	18.72	18.90	
				100% RB	0	19.00	18.64	18.89	18.94	
			16QAM	1RB Mid	50	19.00	18.60	18.69	18.88	
			64QAM	1RB Mid	50	19.00	18.40	18.44	18.49	
			256QAM	1RB Mid	50	19.00	18.37	18.58	18.75	
			CP-OFDM	QPSK	1RB Mid	50	19.00	18.38	18.58	18.75
								Frequency (MHz) / Channel		
								1857.5	1880	1902.5
								371500	376000	380500
	15	DFS-s OFDM	QPSK	1RB Mid	50	19.00	18.59	18.70	18.77	
				50% RB Mid	25	19.00	18.59	18.75	18.97	
								Frequency (MHz) / Channel		
								1855	1880	1905
								371000	376000	381000
	10	DFS-s OFDM	QPSK	1RB Mid	50	19.00	18.54	18.62	18.78	
				50% RB Mid	25	19.00	18.59	18.64	18.80	
								Frequency (MHz) / Channel		
								1852.5	1880	1907.5
								370500	376000	381500
	5	DFS-s OFDM	QPSK	1RB Mid	50	19.00	18.57	18.67	18.92	
				50% RB Mid	25	19.00	18.67	18.80	18.88	

B.4.4.2 5G NR (FR1) band 5 FDD – Antenna 5

Band	BW (MHz)	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm)			
							Frequency (MHz) / Channel			
							834	836.5	839	
NR5	20	DFS-s OFDM	PI/2 BPSK	1RB Mid	50	21.50	166800	167300	167800	
			QPSK	1RB Low	0	21.50				20.86
				1RB Mid	50	21.50				20.88
				1RB High	99	21.50				20.75
				50% RB Low	0	21.50				20.75
				50% RB Mid	25	21.50				20.68
				50% RB High	49	21.50				20.71
				100% RB	0	21.50				20.73
				16QAM	1RB Mid	50				21.50
			64QAM	1RB Mid	50	21.50				20.65
			256QAM	1RB Mid	50	21.50				20.52
			CP-OFDM	QPSK	1RB Mid	50				21.50
								21.16		
							Frequency (MHz) / Channel			
							1857.5	1880	1880	
							371500	376000	380500	
		15	DFS-s OFDM	QPSK	1RB Mid	50	21.50			
					50% RB Mid	25	21.50			
										20.74
								Frequency (MHz) / Channel		
								1855	1880	1905
								371000	376000	381000
		10	DFS-s OFDM	QPSK	1RB Mid	50	21.50			
					50% RB Mid	25	21.50			
										20.65
								Frequency (MHz) / Channel		
								1852.5	1880	1907.5
								370500	376000	381500
	5	DFS-s OFDM	QPSK	1RB Mid	50	21.50				
				50% RB Mid	25	21.50				20.72
									20.76	

B.4.4.3 5G NR (FR1) band 7 FDD – Antenna 5

Band	BW (MHz)	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm)			
							Frequency (MHz) / Channel			
							2510	2535	2560	
NR7	20	DFS-s OFDM	PI/2 BPSK	1RB Mid	50	16.00	15.51	15.50	15.52	
			QPSK	1RB Low	0	16.00	15.61	15.31	15.85	
				1RB Mid	50	16.00	15.77	15.59	15.93	
				1RB High	99	16.00	15.50	15.49	15.54	
				50% RB Low	0	16.00	15.70	15.32	15.98	
				50% RB Mid	25	16.00	15.81	15.80	15.93	
				50% RB High	49	16.00	15.77	15.39	15.78	
				100% RB	0	16.00	15.75	15.35	15.90	
			16QAM	1RB Mid	50	16.00	15.40	15.38	15.42	
			64QAM	1RB Mid	50	16.00	15.84	15.77	15.87	
	256QAM	1RB Mid	50	16.00	15.59	15.54	15.62			
	CP-OFDM	QPSK	1RB Mid	50	16.00	15.66	15.68	15.68		
								Frequency (MHz) / Channel		
								2507.5	2535	2562.5
								501500	507000	512500
	15	DFS-s OFDM	QPSK	1RB Mid	50	16.00	15.64	15.48	15.60	
				50% RB Mid	25	16.00	15.80	15.35	15.77	
								Frequency (MHz) / Channel		
								2505	2535	2565
								501000	507000	513000
	10	DFS-s OFDM	QPSK	1RB Mid	50	16.00	15.67	15.31	15.51	
				50% RB Mid	25	16.00	15.68	15.17	15.56	
								Frequency (MHz) / Channel		
								2502.5	2535	2567.5
								500500	507000	513500
	5	DFS-s OFDM	QPSK	1RB Mid	50	16.00	15.74	15.35	15.72	
				50% RB Mid	25	16.00	15.70	15.29	15.67	

B.4.4.4 5G NR (FR1) band 25 FDD – Antenna 5

Band	BW (MHz)	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm)			
							Frequency (MHz) / Channel			
							1860	1882.5	1905	
NR25	20	DFS-s OFDM	PI/2 BPSK	1RB Mid	50	17.50	16.83	16.81	17.11	
			QPSK	1RB Low	0	17.50	16.82	16.96	17.05	
				1RB Mid	50	17.50	17.01	17.07	17.34	
				1RB High	99	17.50	16.87	17.08	17.12	
				50% RB Low	0	17.50	16.97	16.91	17.10	
				50% RB Mid	25	17.50	16.95	17.42	17.23	
				50% RB High	49	17.50	16.96	17.10	17.16	
				100% RB	0	17.50	16.97	17.06	17.20	
			16QAM	1RB Low	50	17.50	17.02	16.99	17.35	
			64QAM	1RB Low	50	17.50	16.69	16.90	17.06	
	256QAM	1RB Low	50	17.50	17.07	17.30	17.47			
	CP-OFDM	QPSK	1RB Low	50	17.50	16.86	17.08	17.26		
								Frequency (MHz) / Channel		
								1857.5	1882.5	1907.5
								371500	376500	38100
	15	DFS-s OFDM	QPSK	1RB Low	50	17.50	16.97	17.00	17.16	
				50% RB Low	25	17.50	16.93	16.99	17.21	
								Frequency (MHz) / Channel		
								1855	1882.5	1910
								371000	376500	382000
	10	DFS-s OFDM	QPSK	1RB Low	50	17.50	16.89	16.74	17.07	
				50% RB Low	25	17.50	16.79	16.86	17.03	
								Frequency (MHz) / Channel		
								1852.5	1882.5	1912.5
							370500	376500	382500	
5	DFS-s OFDM	QPSK	1RB Low	50	17.50	17.02	17.02	17.25		
			50% RB Low	25	17.50	16.95	16.99	17.28		

B.4.4.5 5G NR (FR1) band 30 FDD – Antenna 5

Band	BW (MHz)	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm)			
							Frequency (MHz) / Channel			
NR30	10	DFS-s OFDM	PI/2 BPSK	1RB Mid	25	17.50	2310	46200	17.07	
			QPSK	1RB Low	0	17.50				17.36
				1RB Mid	25	17.50				17.09
				1RB High	49	17.50				17.01
				50% RB Low	0	17.50				17.05
				50% RB Mid	12	17.50				17.04
				50% RB High	25	17.50				16.97
			100% RB	0	17.50	17.04				
			16QAM	1RB Mid	25	17.50				16.94
			64QAM	1RB Mid	25	17.50				17.36
			256QAM	1RB Mid	25	17.50				17.15
			CP-OFDM	QPSK	1RB Mid	25				17.50
								Frequency (MHz) / Channel		
								2310		
								46200		
5	DFS-s OFDM	QPSK	1RB Mid	25	17.50			17.37		
			50% RB Mid	12	17.50			17.32		

B.4.4.6 5G NR (FR1) band 38 TDD – Antennas 5 & 8

SAR Measurement for 5G NR Band 38 TDD (Frequency range: 2570 – 2620MHz) is covered by 5G NR Band 41 TDD (Frequency range: 2496 – 2690MHz) due to overlapping frequency range, same maximum tune-up, and same bandwidth.

B.4.4.7 5G NR (FR1) band 41 TDD – Antenna 5

Band	BW	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm) Antenna 8					
							Frequency (MHz) / Channel					
							2546	2569.5	2593	2616.5	2640	
							509200	513900	518600	523300	528000	
NR41	100	DFS-s OFDM	PI/2 BPSK	1RB Mid	136	16.00			15.22			
			QPSK	1RB Low	0	16.00			15.21			
				1RB Mid	136	16.00			15.53			
				1RB High	270	16.00			15.53			
				50% RB Low	0	16.00			15.78			
				50% RB Mid	68	16.00			15.68			
				50% RB High	137	16.00			15.89			
				100% RB	0	16.00			15.85			
			16QAM	1RB Mid	136	16.00			15.02			
			64QAM	1RB Mid	136	16.00			15.48			
	256QAM	1RB Mid	136	16.00			15.19					
	CP-OFDM	QPSK	1RB Mid	136	16.00			15.09				
								Frequency (MHz) / Channel				
								2541	2567	2593	2619	19.50
								508200	513400	518600	523800	19.50
	90	DFS-s OFDM	QPSK	1RB Mid	136	16.00			15.19			
				50% RB Mid	68	16.00			15.63			
								Frequency (MHz) / Channel				
								2536	2564.5	2593	2621.5	19.50
								507200	512900	518600	524300	19.50
	80	DFS-s OFDM	QPSK	1RB Mid	136	16.00			15.27			
				50% RB Mid	68	16.00			15.70			
								Frequency (MHz) / Channel				
								2526	2559.5	2593	2626.5	19.50
								505200	511900	518600	525300	19.50
	60	DFS-s OFDM	QPSK	1RB Mid	136	16.00			15.77			
				50% RB Mid	68	16.00			15.51			
								Frequency (MHz) / Channel				
								2521	2557	2593	2629	19.50
								504200	511400	518600	525800	19.50
50	DFS-s OFDM	QPSK	1RB Mid	136	16.00			15.63				
			50% RB Mid	68	16.00			15.48				
							Frequency (MHz) / Channel					
							2516	2554.5	2593	2631.5	19.50	
							503200	510900	518600	526300	19.50	
40	DFS-s OFDM	QPSK	1RB Mid	136	16.00			15.53				
			50% RB Mid	68	16.00			15.55				
							Frequency (MHz) / Channel					
							2506	2549.5	2593	2636.5	19.50	
							501200	509900	518600	527300	19.50	
20	DFS-s OFDM	QPSK	1RB Mid	136	16.00			15.27				
			50% RB Mid	68	16.00			15.43				

B.4.4.8 5G NR (FR1) band 41 TDD – Antenna 8

Band	BW	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm) Antenna 8					
							Frequency (MHz) / Channel					
							2546	2569.5	2593	2616.5	2640	
NR41	100	DFS-s OFDM	PI/2 BPSK	1RB Mid	136	20.50			20.03			
			QPSK	1RB Low	0	20.50			19.97			
				1RB Mid	136	20.50			20.19			
				1RB High	270	20.50			19.28			
				50% RB Low	0	20.50			20.45			
				50% RB Mid	68	20.50			20.50			
				50% RB High	137	20.50			20.16			
				100% RB	0	20.50			20.22			
			16QAM	1RB Mid	136	20.50			19.97			
			64QAM	1RB Mid	136	20.50			20.24			
	256QAM	1RB Mid	136	20.50			20.08					
	CP-OFDM	QPSK	1RB Mid	136	20.50			19.92				
								Frequency (MHz) / Channel				
								2541	2567	2593	2619	19.50
								508200	513400	518600	523800	19.50
	90	DFS-s OFDM	QPSK	1RB Mid	136	20.50			20.10			
				50% RB Mid	68	20.50			20.32			
								Frequency (MHz) / Channel				
								2536	2564.5	2593	2621.5	19.50
								507200	512900	518600	524300	19.50
	80	DFS-s OFDM	QPSK	1RB Mid	136	20.50			20.19			
				50% RB Mid	68	20.50			20.21			
								Frequency (MHz) / Channel				
								2526	2559.5	2593	2626.5	19.50
								505200	511900	518600	525300	19.50
	60	DFS-s OFDM	QPSK	1RB Mid	136	20.50			20.36			
				50% RB Mid	68	20.50			20.31			
								Frequency (MHz) / Channel				
							2521	2557	2593	2629	19.50	
							504200	511400	518600	525800	19.50	
50	DFS-s OFDM	QPSK	1RB Mid	136	20.50			20.16				
			50% RB Mid	68	20.50			20.24				
							Frequency (MHz) / Channel					
							2516	2554.5	2593	2631.5	19.50	
							503200	510900	518600	526300	19.50	
40	DFS-s OFDM	QPSK	1RB Mid	136	20.50			19.78				
			50% RB Mid	68	20.50			20.02				
							Frequency (MHz) / Channel					
							2506	2549.5	2593	2636.5	19.50	
							501200	509900	518600	527300	19.50	
20	DFS-s OFDM	QPSK	1RB Mid	136	20.50			19.34				
			50% RB Mid	68	20.50			20.01				

B.4.4.11 5G NR (FR1) band 71 FDD – Antenna 5

Band	BW	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm)						
							Frequency (MHz) / Channel						
							673.0	680.5	688.0				
							134600	136100	137600				
NR71	20	DFS-s OFDM	PI/2 BPSK	1RB Mid	50	23.00		22.71					
			QPSK	1RB Low	0	23.00		22.79					
				1RB Mid	50	23.00		22.66					
				1RB High	99	23.00		22.54					
				50% RB Low	0	23.00		22.96					
				50% RB Mid	25	23.00		22.90					
				50% RB High	49	23.00		22.82					
				100% RB	0	23.00		22.94					
			16QAM	1RB Mid	50	23.00		22.64					
			64QAM	1RB Mid	50	23.00		22.62					
	256QAM	1RB Mid	50	23.00		22.83							
	CP-OFDM	QPSK	1RB Mid	50	23.00		22.71						
								Frequency (MHz) / Channel					
								670.5	680.5	690.5			
								134100	136100	138100			
	15	DFS-s OFDM	QPSK	1RB Mid	50	23.00		22.90					
				50% RB Mid	25	23.00		22.90					
											Frequency (MHz) / Channel		
											668.0	680.5	693.0
								133600	136100	138600			
	10	DFS-s OFDM	QPSK	1RB Mid	50	23.00		22.71	22.81	22.70			
				50% RB Mid	25	23.00		22.65	22.76	22.65			
								Frequency (MHz) / Channel					
								665.5	680.5	695.5			
							133100	136100	139100				
5	DFS-s OFDM	QPSK	1RB Mid	50	23.00		22.90	23.00	22.86				
			50% RB Mid	25	23.00		22.87	22.76	22.84				

B.4.4.12 5G NR (FR1) band 77 TDD – Antenna 5

Band	BW	Modulation	Mode	RB Allocation	RB Offset	Factory upper tolerance (dBm)	Measured Output Power (dBm) Antenna 8					
							Frequency (MHz) / Channel					
							3840	3795	3750	3885	3930	
NR77	100	DFS-s OFDM	PI/2 BPSK	1RB Mid	136	16.50	656600	653000	650000	659000	662000	
			QPSK	1RB Low	0	16.50						
				1RB Mid	136	16.50						
				1RB High	270	16.50						
				50% RB Low	0	16.50						
				50% RB Mid	68	16.50						
				50% RB High	137	16.50						
				100% RB	0	16.50						
				16QAM	1RB Mid	136						16.50
			64QAM	1RB Mid	136	16.50						
			256QAM	1RB Mid	136	16.50						
			CP-OFDM	QPSK	1RB Mid	136						16.50
								Frequency (MHz) / Channel				
								3840	3795	3750	3885	3930
								656600	653000	650000	659000	662000
	90	DFS-s OFDM	QPSK	1RB Mid	136	16.50						
				50% RB Mid	68	16.50						
								Frequency (MHz) / Channel				
								3840	3795	3750	3885	3930
								656600	653000	650000	659000	662000
	80	DFS-s OFDM	QPSK	1RB Mid	136	16.50						
				50% RB Mid	68	16.50						
								Frequency (MHz) / Channel				
								3840	3795	3750	3885	3930
							656600	653000	650000	659000	662000	
60	DFS-s OFDM	QPSK	1RB Mid	136	16.50							
			50% RB Mid	68	16.50							
							Frequency (MHz) / Channel					
							3840	3795	3750	3885	3930	
							656600	653000	650000	659000	662000	
50	DFS-s OFDM	QPSK	1RB Mid	136	16.50							
			50% RB Mid	68	16.50							
							Frequency (MHz) / Channel					
							3840	3795	3750	3885	3930	
							656600	653000	650000	659000	662000	
40	DFS-s OFDM	QPSK	1RB Mid	136	16.50							
			50% RB Mid	68	16.50							
							Frequency (MHz) / Channel					
							3840	3795	3750	3885	3930	
							656600	653000	650000	659000	662000	
20	DFS-s OFDM	QPSK	1RB Mid	136	16.50							
			50% RB Mid	68	16.50							
							Frequency (MHz) / Channel					
							3840	3795	3750	3885	3930	
							656600	653000	650000	659000	662000	

B.5 Tissue Parameters Measurement

Body TSL

Body TSL	Target TSL		Measured TSL		Deviation %		Date
Freq (MHz)	ϵ' (F/m)	σ (S/m)	ϵ' (F/m)	σ (S/m)	Deviation ϵ'	Deviation σ	
750	55.53	0.96	52.98	0.98	-4.59	2.08	2023-01-12
	55.53	0.96	51.69	0.98	-6.92	2.08	2023-01-23
835	55.15	0.99	52.7	1.02	-4.44	3.03	2023-01-12
	55.15	0.99	51.38	1.01	-6.84	2.02	2023-01-23
1750	53.43	1.49	51.6	1.50	-3.43	0.67	2023-01-12
	53.43	1.49	51.24	1.52	-4.10	2.01	2023-01-17
	53.43	1.49	50.9	1.5	-4.74	0.67	2023-01-23
1900	53.3	1.52	51.39	1.60	-3.58	5.26	2023-01-12
	53.3	1.52	51.03	1.58	-4.26	3.95	2023-01-17
	53.3	1.52	50.71	1.59	-4.86	4.61	2023-01-23
2300	52.9	1.81	50.85	1.91	-3.88	5.52	2023-01-12
	52.9	1.81	50.18	1.88	-5.14	3.87	2023-01-23
2600	52.51	2.16	50.35	2.20	-4.11	1.85	2023-01-12
	52.51	2.16	50.03	2.22	-4.72	2.78	2023-01-17
	52.51	2.16	49.68	2.18	-5.39	0.93	2023-01-23
3700	51.05	3.55	48.08	3.35	-5.82	-5.63	2023-01-12
	51.05	3.55	47.27	3.32	-7.40	-6.48	2023-01-23

See Annex D below for more details.

B.6 System Check Measurements

Body Measurements

Frequency (MHz)	Forwarded power (mW)	Average	Target SAR (W/Kg)	Measured SAR (W/Kg)	Deviation to target (%)	Deviation to target limit	Date
750	50	1g	8.75	8.52	-2.63	±10%	2023-01-12
		10g	5.72	5.56	-2.80		2023-01-25
		1g	8.75	8.52	-2.63		
		10g	5.72	5.46	-4.55		
835		1g	9.65	9.40	-2.59		2023-01-12
		10g	6.32	6.08	-3.80		2023-01-24
		1g	9.65	9.82	1.76		
		10g	6.32	6.32	0.00		
1750		1g	37.10	36.20	-2.43		2023-01-12
		10g	19.60	19.04	-2.86		2023-01-17
		1g	37.10	37.20	0.27		2023-01-23
		10g	19.60	19.50	-0.51		
		1g	37.10	38.00	2.43		
		10g	19.60	19.84	1.22		
1900		1g	40.30	41.00	1.74		2023-01-12
		10g	21.00	21.00	0.00		2023-01-17
	1g	40.30	41.80	3.72	2023-01-23		
	10g	21.00	21.20	0.95			
	1g	40.30	40.40	0.25			
	10g	21.00	20.60	-1.90			
2300	1g	47.90	49.80	3.97	2023-01-12		
	10g	23.20	23.20	0.00	2023-01-23		
	1g	47.90	45.40	-5.22			
	10g	23.20	21.20	-8.62			
2600	1g	54.10	54.40	0.55	2023-01-13		
	10g	24.10	24.00	-0.41	2023-01-17		
	1g	54.10	50.60	-6.47	2023-01-23		
	10g	24.10	22.40	-7.05			
	1g	54.10	52.80	-2.40			
	10g	24.10	23.00	-4.56			
3700	1g	62.10	63.60	2.42	2023-01-13		
	10g	22.20	23.20	4.50	2023-01-23		
	1g	62.10	61.80	-0.48			
	10g	22.20	22.60	1.80			

See Annex C for more details.

B.7 SAR Test Results

B.7.1 WCDMA

B.7.1.1 WCDMA II

Band	BW (MHz)	Rate	Channel Number	Freq (MHz)	Antenna Vendor	Scaling Factor (dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
Band II	5	RMC 12.2kbps	9400	1880	1	0.26	0.47	0.50	1
			9400	1880	2	0.26	0.37	0.39	

B.7.1.2 WCDMA IV

Band	BW (MHz)	Rate	Channel Number	Freq (MHz)	Antenna Vendor	Scaling Factor (dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
Band IV	5	RMC 12.2kbps	1413	1732.6	1	0.21	0.74	0.77	2
			1413	1732.6	2	0.21	0.33	0.34	

B.7.1.3 WCDMA V

Band	BW (MHz)	Rate	Channel Number	Freq (MHz)	Antenna Vendor	Scaling Factor (dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
Band V	5	RMC 12.2kbps	4183	836.6	1	0.28	0.73	0.78	3
			4183	836.6	2	0.28	0.30	0.32	

B.7.2 LTE

B.7.2.1 UL CA 5B

UL CA shall be tested based on the worst-case SAR configuration determined from non-CA SAR testing result. The channel BW, channel number, RB allocation, etc. would be selected to allow contiguous CA of PCC and SCC. Uplink output power for UL CA is the total power measured across the PCC and SCC.

Standalone testing in LTE Band5 is not required case SAR as it is covered by LTE Band26. This latter is used to determine antenna vendor 1 configuration that gives the highest SAR, thus, the same is used for ULCA testing, thus the same is used for ULCA testing in Band5

Band	Tx Ant	Modulation / BW	PCC			SCC			Antenna Vendor	Scaling Factor (dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)
			Ch	Freq (MHz)	RB Allocation	Ch	Freq (MHz)	RB Allocation				
LTE 5	5	QPSK / 10MHz	26775	822.5	1RB High	20476	831.6	1RB Low	1	0.47	0.73	0.82

PCC RB allocation settings for UL CA have been adjusted based on the worst-case power

B.7.2.2 LTE Band 7 FDD

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Scaling Factor(dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
Band 7	5	QPSK	20	21100	2535	1	1RB Mid	0.58	0.61	0.70	
							50RB Mid	0.58	0.49	0.56	
	20850			2510	1RB Mid		0.96	0.73	0.91		
					50RB Mid		1.13	0.58	0.75		
	21100			2535	1RB Mid		0.86	0.76	0.93		
					50RB Mid		0.98	0.61	0.76		
	21350			2560	100RB Mid	0.98	0.60	0.75	4		
					1RB Mid	0.72	0.79	0.93			
	5			21100	2535	2	50RB Mid	0.85	0.62	0.76	
							1RB Mid	0.58	0.37	0.42	
	8			20850	2510	2	50RB Mid	0.58	0.24	0.28	
							1RB Mid	0.96	0.70	0.88	
				21100	2535	50RB Mid	1.13	0.52	0.68		
						1RB Mid	0.86	0.75	0.91		
				21100	2535	50RB Mid	0.98	0.59	0.74		
						100RB Mid	0.98	0.53	0.66		
21350		2560	1RB Mid	0.72	0.74	0.88					
			50RB Mid	0.85	0.56	0.68					

B.7.2.3 UL CA 7C

UL CA shall be tested based on the worst-case SAR configuration determined from non-CA SAR testing result. The channel BW, channel number, RB allocation, etc. would be selected to allow contiguous CA of PCC and SCC. Uplink output power for UL CA is the total power measured across the PCC and SCC.

From the above table on standalone testing on LTE Band7, antenna vendor 1 configuration that gives the highest SAR, thus, the same is used for UL CA testing

Band	Tx Ant	Modulation / BW	PCC			SCC			Antenna Vendor	Scaling Factor (dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)
			Ch	Freq (MHz)	RB Allocation	Ch	Freq (MHz)	RB Allocation				
LTE 7	8	QPSK / 20MHz	21100	2535	1RB High	21100	2535	1RB Low	1	0.13	0.61	0.63

PCC RB allocation settings for UL CA have been adjusted based on the worst-case power

B.7.2.4 LTE Band 12 FDD

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Scaling Factor(dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
Band 12	5	QPSK	10	23095	707.5	1	1RB Mid	0.69	0.76	0.89	5
							50RB Mid	0.74	0.59	0.70	
							100RB Mid	0.69	0.60	0.70	
				23095	707.5	2	1RB Mid	0.69	0.65	0.76	
							50RB Mid	0.74	0.51	0.61	

B.7.2.5 LTE Band 13 FDD

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Scaling Factor(dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
Band 13	5	QPSK	10	23230	782	1	1RB Mid	0.88	0.93	1.14	6
							50RB Mid	0.93	0.72	0.89	
							100RB Mid	0.90	0.72	0.88	
				23230	782	2	1RB Mid	0.88	0.47	0.58	
							50RB Mid	0.93	0.47	0.58	

B.7.2.6 LTE Band 14 FDD

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Scaling Factor(dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
Band 14	5	QPSK	10	23330	793	1	1RB Mid	0.44	0.93	1.03	7
							50RB Mid	0.47	0.74	0.82	
							100RB Mid	0.45	0.73	0.81	
				23330	793	2	1RB Mid	0.44	0.60	0.67	
							50RB Mid	0.47	0.48	0.54	

B.7.2.7 LTE Band 25 FDD

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Scaling Factor(dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
Band 25	5	QPSK	20	26140	1860	1	1RB Mid	0.50	0.81	0.90	
							50RB Mid	0.41	0.65	0.71	
							100RB Mid	0.45	0.63	0.69	
				26365	1882.5		1RB Mid	0.34	0.83	0.90	
							50RB Mid	0.36	0.66	0.72	
							100RB Mid	0.45	0.63	0.69	
	26590			1905	1RB Mid	0.32	0.79	0.85			
					50RB Mid	0.31	0.64	0.68			
					100RB Mid	0.45	0.63	0.69			
	8			26140	1860	1	1RB Mid	1.11	0.77	0.99	
							50RB Mid	1.06	0.63	0.80	
							100RB Mid	1.26	0.61	0.82	8
							1RB Mid	1.25	0.84	1.13	
	26365			1882.5	50RB Mid	1.22	0.61	0.81			
					100RB Mid	1.26	0.61	0.82			
					1RB Mid	1.01	0.83	1.04			
26590	1905	50RB Mid	1.05	0.66	0.84						
		100RB Mid	1.26	0.61	0.82						
5	26365	1882.5	2	1RB Mid	0.50	0.73	0.82				
				50RB Mid	0.41	0.48	0.53				
8	26365	1882.5	2	1RB Mid	1.25	0.55	0.73				
				50RB Mid	1.22	0.33	0.44				

B.7.2.8 LTE Band 26 FDD

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Scaling Factor(dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
Band 26	5	QPSK	15	26775	821.5	1	1RB Mid	0.33	0.89	0.96	
							50RB Mid	0.38	0.70	0.76	
							100RB Mid	0.36	0.71	0.77	
				26865	831.5		1RB Mid	0.27	0.90	0.96	9
							50RB Mid	0.34	0.71	0.76	
							100RB Mid	0.36	0.71	0.77	
	26965			841.5	1RB Mid	0.29	0.90	0.96			
					50RB Mid	0.36	0.71	0.78			
5	26865	831.5	2	1RB Mid	0.27	0.24	0.26				
				50RB Mid	0.34	0.18	0.20				

B.7.2.9 LTE Band 30 FDD

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Scaling Factor(dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #		
Band 30	5	QPSK	10	27710	2310	1	1RB Mid	1.76	0.67	1.00			
							50RB Mid	1.29	0.52	0.69			
							100RB Mid	1.34	0.54	0.73			
	8					27710	2310	1RB Mid	1.13	0.67	0.86		
								50RB Mid	1.23	0.52	0.68		
								100RB Mid	1.33	0.51	0.69		
	5			27710	2310	2	1RB Mid	1.76	0.27	0.40			
							50RB Mid	1.29	0.26	0.35			
						8	27710	2310	1RB Mid	1.13	0.79	1.02	10
									50RB Mid	1.23	0.62	0.82	
8	27710	2310	2	100RB Mid	1.33	0.55	0.75						

B.7.2.10 LTE Band 41 TDD

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Scaling Factor(dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
Band 41	5	QPSK	200	40620	2593	1	1RB Mid	0.55	0.26	0.30	11
							50RB Mid	0.58	0.21	0.24	
	8						1RB Mid	0.96	0.41	0.51	
							50RB Mid	1.03	0.33	0.41	
	5			40620	2593	2	1RB Mid	0.55	0.07	0.08	
							50RB Mid	0.58	0.07	0.08	
	8						1RB Mid	0.96	0.28	0.35	
							50RB Mid	1.03	0.23	0.29	

B.7.2.11 UL CA 41C

UL CA shall be tested based on the worst-case SAR configuration determined from non-CA SAR testing result. The channel BW, channel number, RB allocation, etc. would be selected to allow contiguous CA of PCC and SCC. Uplink output power for UL CA is the total power measured across the PCC and SCC.

From the above table on standalone testing on LTE Band41, antenna vendor 1 configuration that gives the highest SAR, thus, the same is used for UL CA testing

Band	Tx Ant	Modulation / BW	PCC			SCC			Antenna Vendor	Scaling Factor (dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)
			Ch	Freq (MHz)	RB Allocation	Ch	Freq (MHz)	RB Allocation				
LTE 41	8	QPSK / 20MHz	40521	2583.1	1RB High	40719	2602.9	1RB Low	1	0.46	0.35	0.39

PCC RB allocation settings for UL CA have been adjusted based on the worst-case power

B.7.2.12 LTE Band 48 TDD

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Scaling Factor(dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
Band 48	8	QPSK	200	55990	3625	1	1RB Mid	0.54	0.24	0.27	12
							50RB Mid	0.57	0.23	0.27	
	8			55990	3625	2	1RB Mid	0.54	0.21	0.24	
							50RB Mid	0.57	0.16	0.19	

B.7.2.13 UL CA 48C

UL CA shall be tested based on the worst-case SAR configuration determined from non-CA SAR testing result. The channel BW, channel number, RB allocation, etc. would be selected to allow contiguous CA of PCC and SCC. Uplink output power for UL CA is the total power measured across the PCC and SCC.

From the above table on standalone testing on LTE Band48, antenna vendor 1 configuration that gives the highest SAR, thus, the same is used for UL CA testing

Band	Tx Ant	Modulation / BW	PCC			SCC			Antenna Vendor	Scaling Factor (dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)
			Ch	Freq (MHz)	RB Allocation	Ch	Freq (MHz)	RB Allocation				
LTE 48	8	QPSK / 20MHz	40521	2583.1	1RB High	40719	2602.9	1RB Low	1	0.56	0.13	0.15

PCC RB allocation settings

B.7.2.14 LTE Band 66 FDD

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Scaling Factor(dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
Band 66	5	QPSK	20	132072	1720	1	1RB Mid	0.36	0.75	0.81	
							50RB Mid	0.38	0.57	0.62	
				132322	1745		1RB Mid	0.50	0.77	0.86	
							50RB Mid	0.50	0.64	0.71	
				132572	1770		100RB Mid	0.49	0.56	0.63	
							1RB Mid	0.46	0.70	0.78	
	8			132072	1720		50RB Mid	0.49	0.56	0.62	
							1RB Mid	0.61	0.82	0.95	
				132322	1745		50RB Mid	0.61	0.66	0.76	
							1RB Mid	0.43	0.83	0.91	
				132572	1770		50RB Mid	0.60	0.66	0.75	
							100RB Mid	0.58	0.65	0.74	
	5	8	2	132322	1745	1RB Mid	0.62	0.86	1.00	13	
						50RB Mid	0.67	0.68	0.79		
						1RB Mid	0.50	0.53	0.59		
						50RB Mid	0.50	0.41	0.46		
8	132322	1745		1RB Mid	0.43	0.71	0.79				
				50RB Mid	0.60	0.58	0.67				

B.7.2.15 LTE ULCA 66B, 66C

UL CA shall be tested based on the worst-case SAR configuration determined from non-CA SAR testing result. The channel BW, channel number, RB allocation, etc. would be selected to allow contiguous CA of PCC and SCC. Uplink output power for UL CA is the total power measured across the PCC and SCC.

From the above table on standalone testing on LTE Band66, antenna vendor 1 configuration that gives the highest SAR, thus, the same is used for UL CA testing, thus the same is used for UL CA testing for the 66C mode. Since the 10MHz was not tested in standalone, due to KDB 941225 reduction list, the initial configuration for the 66B mode was taken from the worst-case scenario of the 20MHz

Band	Tx Ant	Modulation / BW	PCC			SCC			Antenna Vendor	Scaling Factor (dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)
			Ch	Freq (MHz)	RB Allocation	Ch	Freq (MHz)	RB Allocation				
LTE 66B	8	QPSK / 10MHz	132373	1750.1	1RB High	132472	1760	1RB Low	1	0.73	0.68	0.80
LTE 66B	8	QPSK / 20MHz	132323	1745.1	1RB High	132521	1764.9	1RB Low	1	0.72	0.69	0.81

PCC RB allocation settings for UL CA has been adjusted based on the worst-case power

B.7.2.16 LTE Band 71 FDD

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Scaling Factor(dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
Band 71	5	QPSK	20	133297	680.5	1	1RB Mid	0.58	0.95	1.08	14
							50RB Mid	0.60	0.76	0.87	
							100RB Mid	0.54	0.75	0.85	
	5			133297	680.5	2	1RB Mid	0.58	0.21	0.24	
							50RB Mid	0.60	0.10	0.11	

B.7.3 5G NR

B.7.3.1 5G NR 2 FDD for ENDC Only

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Scaling Factor(dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
NR2	8	QPSK	20	376000	1880	1	1RB Mid	0.07	0.78	0.79	15
							50RB Mid	0.16	0.74	0.77	
	8			376000	1880	2	1RB Mid	0.07	0.76	0.77	
							50RB Mid	0.16	0.76	0.79	

B.7.3.2 5G NR 5 FDD

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Scaling Factor(dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
NR5	5	QPSK	20	167300	836.5	1	1RB Mid	0.75	0.78	0.92	16
							50RB Mid	0.79	0.76	0.91	
							100RB Mid	0.75	0.77	0.91	
	5			167300	836.5	2	1RB Mid	0.75	0.72	0.86	
							50RB Mid	0.79	0.75	0.90	
							100RB Mid	0.75	0.72	0.85	

B.7.3.3 5G NR 7 FDD

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Scaling Factor(dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
NR7	5	QPSK	20	507000	2535	1	1RB Mid	0.41	0.49	0.54	17
							50RB Mid	0.20	0.50	0.52	
	5			507000	2535	2	1RB Mid	0.41	0.50	0.55	
							50RB Mid	0.20	0.51	0.53	

B.7.3.4 5G NR 25 FDD

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Scaling Factor(dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
Band 25	5	QPSK	20	376500	1882.5	1	1RB Mid	0.43	0.70	0.77	18
							50RB Mid	0.08	0.68	0.70	
	5			376500	1882.5	2	1RB Mid	0.43	0.67	0.73	
							50RB Mid	0.08	0.66	0.67	

B.7.3.5 5G NR 30 FDD

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Scaling Factor(dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
Band 30	5	QPSK	10	46200	2310	1	1RB Mid	0.41	0.57	0.63	19
							50RB Mid	0.46	0.59	0.65	
	5			46200	2310	2	1RB Mid	0.40	0.55	0.61	
							50RB Mid	0.46	0.51	0.57	

B.7.3.6 5G NR 41 TDD

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Scaling Factor(dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #		
Band 41	5	QPSK	100	518598	2593	1	1RB Mid	0.47	0.42	0.47	20		
							50RB Mid	0.32	0.39	0.42			
	8						518598	2593	1RB Mid	0.31		0.14	0.14
									50RB Mid	0.00		0.35	0.35
	5			518598	2593	2	1RB Mid	0.47	0.36	0.40			
							50RB Mid	0.32	0.32	0.34			
	8			518598	2593	2	1RB Mid	0.31	0.59	0.63			
							50RB Mid	0.00	0.64	0.64			

B.7.3.7 5G NR 66 FDD

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Scaling Factor(dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
Band 66	5	QPSK	40	349000	1745	1	1RB Mid	0.24	0.79	0.83	
							50RB Mid	0.29	0.74	0.79	
							100RB Mid	0.54	0.78	0.89	21
	8			349000	1745	1	1RB Mid	0.08	0.50	0.51	
							50RB Mid	0.12	0.46	0.47	
	5			349000	1745	2	1RB Mid	0.24	0.64	0.68	
							50RB Mid	0.29	0.61	0.65	
							1RB Mid	0.08	0.69	0.70	
8	349000	1745	2	50RB Mid	0.12	0.68	0.69				

B.7.3.8 5G NR 71 FDD

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Scaling Factor(dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
Band 71	5	QPSK	20	136100	680.5	1	1RB Mid	0.34	1.00	1.08	22
							50RB Mid	0.10	1.01	1.03	
							100RB Mid	0.06	1.03	1.04	
	5			136100	680.5	2	1RB Mid	0.34	0.99	1.07	
							50RB Mid	0.10	1.03	1.05	
							100RB Mid	0.06	1.04	1.04	

B.7.3.9 5G NR 77 TDD

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Scaling Factor(dB)	Measured SAR 1g (W/Kg)	Reported SAR 1g (W/Kg)	Plot #
Band 77	5	QPSK	100	650000	3750	1	1RB Mid	0.06	0.55	0.56	23
							50RB Mid	0.00	0.54	0.54	
	8			650000	3750	1	1RB Mid	0.51	0.10	0.11	
							50RB Mid	0.48	0.10	0.11	
	5			650000	3750	2	1RB Mid	0.06	0.49	0.50	
							50RB Mid	0.00	0.49	0.49	
	8			650000	3750	2	1RB Mid	0.51	0.34	0.38	
							50RB Mid	0.48	0.35	0.39	

B.7.3.10 ENDC

For EN-DC mode, the 4G and 5G carriers transmit on separate antennas. Each exposure has been measured separately. For both LTE and 5G-NR, the highest standalone SAR conditions are added to derive the Total SAR. Refer to paragraph A.4.7

B.8 SAR Measurement Variability

According to FCC OET KDB 865664, SAR Measurement variability is assessed when the maximum initial measured SAR is ≥ 0.8 W/kg for a certain band/mode. If the measured SAR value of the initial repeated measurement is < 1.45 W/kg with $< 20\%$ variation, only one repeated measurement is required to confirm that the results are not expected to have substantial variations.

A second repeated measurement is required only if the measured results for the initial repeated measurement are within 10% of the SAR limit or vary by more than 20%.

A third repeated measurement is required only if the original, first or second repeated measurement ≥ 1.5 W/Kg and the ratio of largest to smallest SAR for the original, first and second repeated measurement is > 1.2 .

Band / Mode	Ch #	Freq (MHz)	Measured SAR 1g (W/kg)	1 st Repeated SAR 1g (W/Kg)	2 nd Repeated SAR 1g (W/Kg)	Highest Ratio
5G NR FDD 71 / QPSK – 20MHz	136100	680.5	1.04	1.03		1.01
LTE FDD 26 / QPSK – 15MHz	26865	831.5	0.90	0.90		1.00
LTE FDD 66 / QPSK – 20MHz	133222	1770	0.86	0.86		1.00
LTE FDD 25 / QPSK – 20MHz	26365	1882.5	0.84	0.80		1.05

B.9 Simultaneous Transmission SAR Evaluation

According to FCC OET KDB 447498, when the sum of 1g SAR for all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration.

This report only evaluates SAR for cellular transmission on the module, nevertheless in order to consider all possible simultaneous transmissions on the device for compliance, WLAN SAR and NFC SAR values are considered.

All the values stated in the table below are the worst case found for standalone measurement with disregard of the transmission mode or channel where the worst case was found

Antenna	Highest Reported SAR (1g) (W/kg)				
	WWAN	WLAN 2.4GHz	WLAN 5/6GHz	Bluetooth	**NFC
WWAN (Ant5 TX/RX)	1.14				
WWAN (Ant8 TX/RX)	1.13				
Main WLAN2		0.40*	0.40*		
Aux WLAN1		0.40*	0.40*	0.40*	
NFC					<0.003

*According to FCC OET KDB 447498, when standalone test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated to 0.4 W/Kg for 1-g SAR when the test separation is > 50mm to determine simultaneous transmission test exclusion.

** Refer to these test reports for NFC Wireless Charging Module.

- FA2N1807-02
- CA2N1807-02

SAR simultaneous combinations eschewed the NFC SAR results as per their low values.

Position	Simultaneous Tx Antenna Combination				Σ SAR 1g (W/Kg)	Limit (W/kg)	
	#	WWAN (Ant5 TX/RX)	WWAN (Ant8 TX/RX)	Main WLAN2			Aux WLAN1
Laptop	1	Cellular	Cellular	WLAN 5/6GHz	WLAN 5/6GHz	3.07	1.6
	2	Cellular	Cellular	WLAN 5/6GHz	WLAN 5/6GHz + BT	3.47	
	3	Cellular	Cellular	WLAN 5/6GHz	BT	3.07	
	4	Cellular	Cellular	WLAN 2.4GHz	WLAN 2.4GHz	3.07	
	5	Cellular	Cellular	WLAN 2.4GHz	BT	3.07	

In case the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR to peak location separation ratio. According to the last table possible simultaneous transmission combinations are identified for each position from 1 to 5, each combination will be analyzed by antenna pairs. Antenna pairs considered in one configuration won't be performed again in case they are repeated on the next simultaneous configuration:

Position	Ant. Pair case	Antenna	Reported SAR 1g (W/kg)	Σ SAR 1g (W/Kg)	Peak Location (mm) (x,y,z)	SAR to peak location separation ratio	Limit
Laptop	1a	WWAN (Main 5)	1.14	2.27	(30.1,152.4,-177)	0.01	0.04
		WWAN (Aux 8)	1.13		(-4.6,-100.6,-177)		
	1b	WWAN (Main 5)	1.14	1.54			
		Main WLAN 5/6GHz	0.40				
	1c	WWAN (Main 5)	1.14	1.54			
		Aux WLAN 5/6GHz	0.40				
	1d	WWAN (Aux 8)	1.13	1.53			
		Main WLAN 5/6GHz	0.40				
	1e	WWAN (Aux 8)	1.13	1.53			
		Aux WLAN 5/6GHz	0.40				
	1f	Main WLAN 5/6GHz	0.40	0.80			
		Aux WLAN 5/6GHz	0.40				
	2a	WWAN (Main 5)	1.14	1.54			
		Aux WLAN1 BT	0.40				
	2b	WWAN (Aux 8)	1.13	1.53			
		Aux WLAN1 BT	0.40				
	4a	WWAN (Main 5)	1.14	1.54			
		Main WLAN 2.4GHz	0.40				
	4b	WWAN (Main 5)	1.14	1.54			
		Aux WLAN 2.4GHz	0.40				
4c	WWAN (Aux 8)	1.13	1.53				
	Main WLAN 2.4GHz	0.40					
4d	WWAN (Aux 8)	1.13	1.53				
	Aux WLAN 2.4GHz	0.40					
4e	Main WLAN 2.4GHz	0.40	0.80				
	Aux WLAN1 2.4GHz	0.40					

Considering the results described above and according to the simultaneous transmission evaluation exclusions described in FCC OET KDB 447498, no enlarged zoom scan measurements are required

Annex C. Test System Plots

1.	WCDMA II, RMC 12.2kbps, 5MHz, CH9400	91
2.	WCDMA IV, RMC 12.2kbps, 5MHz, CH1413	92
3.	WCDMA V, RMC 12.2kbps, 5MHz, CH4183	93
4.	LTE Band 7, QPSK - 20MHz, CH21350	94
5.	LTE Band 12, QPSK - 10MHz, CH23095	95
6.	LTE Band 13, QPSK - 10MHz, CH23230	96
7.	LTE Band 14, QPSK - 10MHz, CH23330	97
8.	LTE Band 25, QPSK - 20MHz, CH26365	98
9.	LTE Band 26, QPSK - 15MHz, CH26865	99
10.	LTE Band 30 QPSK - 10MHz, CH27710	100
11.	LTE Band 41, QPSK - 20MHz, CH40620	101
12.	LTE Band 48, QPSK - 20MHz, CH55990	102
13.	LTE Band 66, QPSK - 20MHz, CH132572	103
14.	LTE Band 71, QPSK - 20MHz, CH133297	104
15.	NR FR1 Band 2, QPSK - 20MHz, CH376000	105
16.	NR FR1 Band 5, QPSK - 20MHz, CH167300	106
17.	NR FR1 Band 7, QPSK - 20MHz, CH507000	107
18.	NR FR1 Band 25, QPSK - 20MHz, CH376500	108
19.	NR FR1 Band 30, QPSK - 10MHz, CH462000	109
20.	NR FR1 Band 41, QPSK - 100MHz, CH518598	110
21.	NR FR1 Band 66, QPSK - 40MHz, CH349000	111
22.	NR FR1 Band 71, QPSK - 20MHz, CH349000	112
23.	NR FR1 Band 77, QPSK - 20MHz, CH650000	113
24.	System Check Body Liquid 750MHz – 2023-01-12	114
25.	System Check Body Liquid 750MHz – 2023-01-25	115
26.	System Check Body Liquid 835MHz – 2023-01-12	116
27.	System Check Body Liquid 835MHz – 2023-01-24	117
28.	System Check Body Liquid 1750MHz – 2023-01-12	118
29.	System Check Body Liquid 1750MHz – 2023-01-17	119
30.	System Check Body Liquid 1750MHz – 2023-01-23	120
31.	System Check Body Liquid 1900MHz – 2023-01-12	121
32.	System Check Body Liquid 1900MHz – 2023-01-17	122
33.	System Check Body Liquid 1900MHz – 2023-01-23	123
34.	System Check Body Liquid 2300MHz – 2023-01-12	124
35.	System Check Body Liquid 2300MHz – 2023-01-23	125
36.	System Check Body Liquid 2600MHz – 2023-01-13	126
37.	System Check Body Liquid 2600MHz – 2023-01-17	127
38.	System Check Body Liquid 2600MHz – 2023-01-23	128
39.	System Check Body Liquid 3700MHz – 2023-01-13	129
40.	System Check Body Liquid 3700MHz – 2023-01-23	130

1. WCDMA II, RMC 12.2kbps, 5MHz, CH9400

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I59C	300.0 x 220.0 x 8.0	C892NQ000Q	Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Laptop, 0.00	Band2, UTRA/FDD	WCDMA, 10011-CAB	1880.0, 9400	7.59	1.56	51.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) -	MBBL-600-6000, 2023-Jan-12	EX3DV4 - SN7455, 2022-03-21	DAE Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-12, 22:21	2023-01-12, 22:27
psSAR1g [W/Kg]	0.417	0.472
psSAR10g [W/Kg]	0.228	0.239
Power Drift [dB]	-0.01	-0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		81.4
Dist 3dB Peak [mm]		8.7

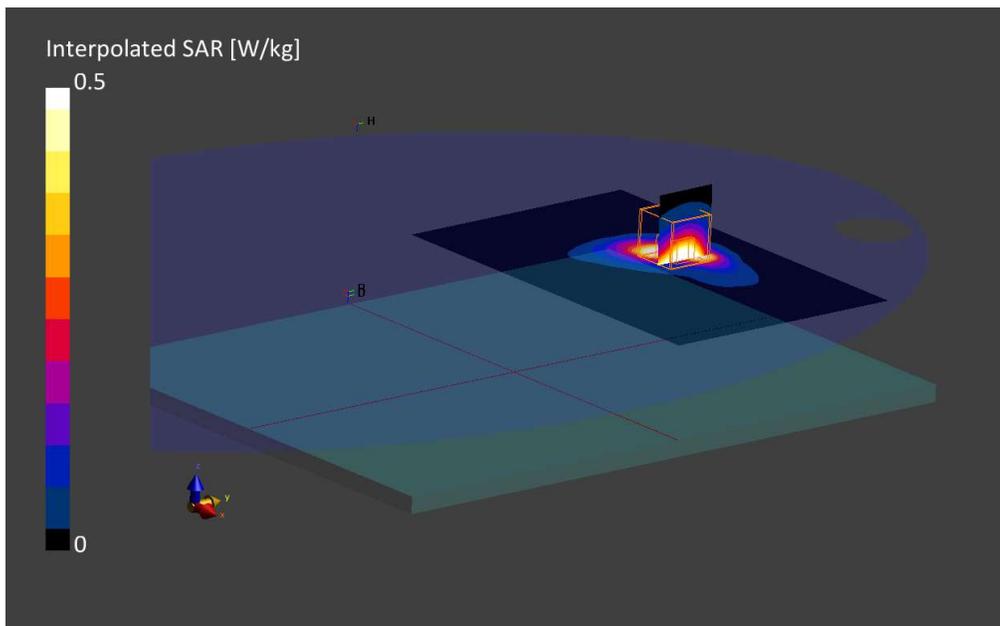

2. WCDMA IV, RMC 12.2kbps, 5MHz, CH1413

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I59C	300.0 x 220.0 x 8.0	C892NQ000Q	Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Laptop, 0.00	Band4, UTRA/FDD	WCDMA, 10011-CAB	1732.6, 1413	7.91	1.47	51.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) -	MBBL-600-6000, 2023-Jan-12	EX3DV4 - SN7455, 2022-03-21	DAE Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-12, 22:40	2023-01-12, 22:46
psSAR1g [W/Kg]	0.650	0.736
psSAR10g [W/Kg]	0.364	0.381
Power Drift [dB]	0.00	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		81.9
Dist 3dB Peak [mm]		9.1

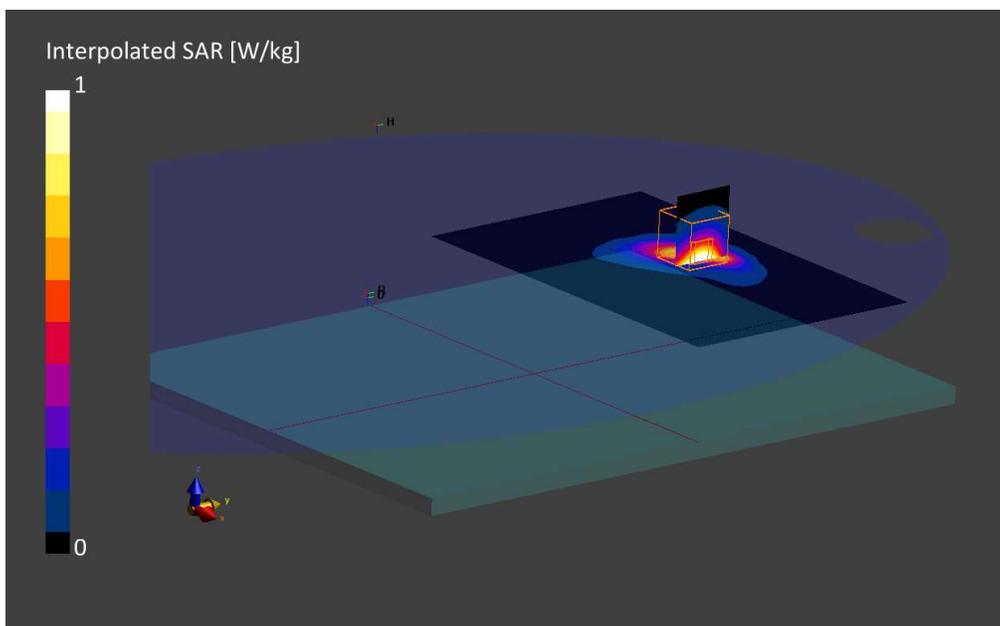

3. WCDMA V, RMC 12.2kbps, 5MHz, CH4183

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I59C	300.0 x 220.0 x 8.0	C892NQ000Q	Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Laptop, 0.00	Band5, UTRA/FDD	WCDMA, 10011-CAB	836.6, 4183	9.34	1.01	52.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) -	MBBL-600-6000, 2023-Jan-12	EX3DV4 - SN7455, 2022-03-21	DAE Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-12, 23:00	2023-01-12, 23:06
psSAR1g [W/Kg]	0.708	0.733
psSAR10g [W/Kg]	0.450	0.424
Power Drift [dB]	-0.02	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		80.8
Dist 3dB Peak [mm]		10.8

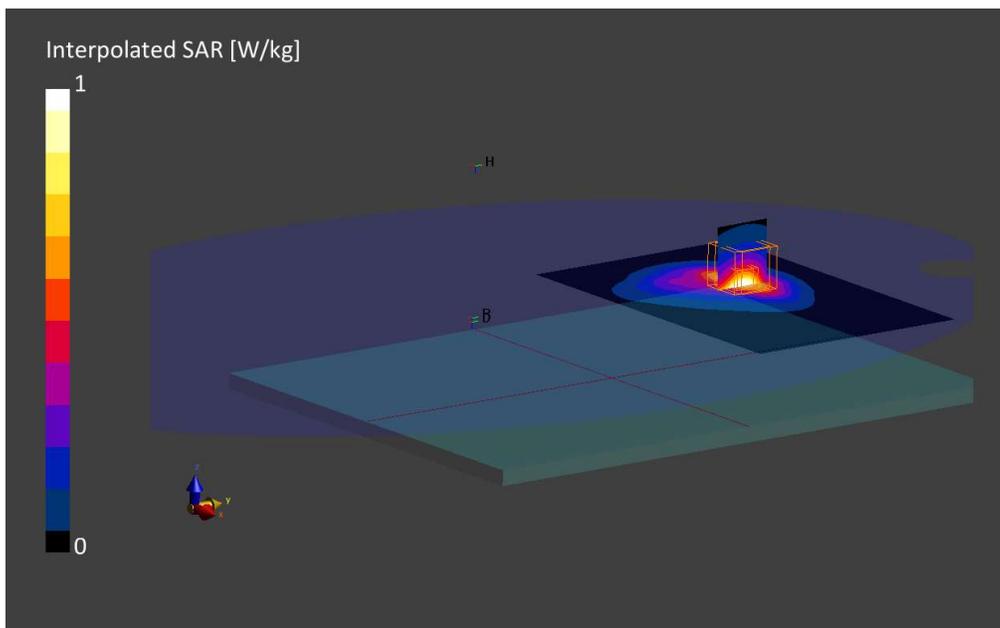

4. LTE Band 7, QPSK - 20MHz, CH21350

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I59C	300.0 x 220.0 x 8.0	C892NQ000Q	Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Laptop, 0.00	Band 7, E-UTRA/FDD	LTE-FDD, 10169-CAE	2560.0, 21350	7.3	2.18	50.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MBBL-600-6000, 2023-Jan-17	EX3DV4 - SN7455, 2022-03-21	DAE Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 160.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-17, 14:16	2023-01-17, 14:23
psSAR1g [W/Kg]	0.778	0.785
psSAR10g [W/Kg]	0.401	0.380
Power Drift [dB]	-0.01	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		77.5
Dist 3dB Peak [mm]		10.0

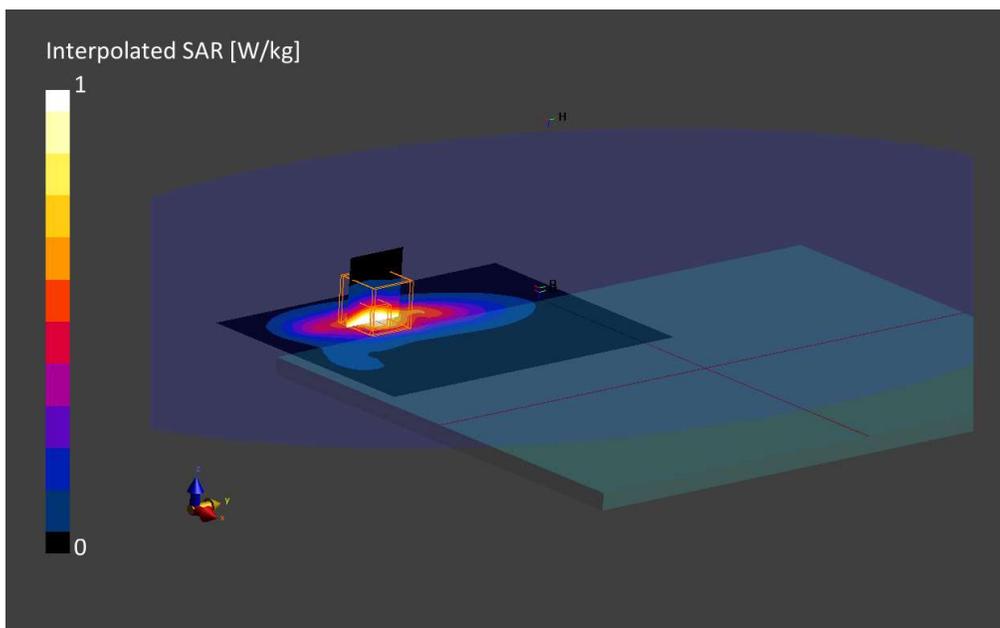

5. LTE Band 12, QPSK - 10MHz, CH23095

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I59C	300.0 x 220.0 x 8.0	C892NQ000Q	Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Laptop, 0.00	Band 12, E-UTRA/FDD	LTE-FDD, 10175-CAG	707.5, 23095	9.69	0.96	53.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2023-Jan-12	EX3DV4 - SN7455, 2022-03-21	DAE Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-12, 09:16	2023-01-12, 09:22
psSAR1g [W/Kg]	0.663	0.759
psSAR10g [W/Kg]	0.444	0.434
Power Drift [dB]	-0.00	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		80.1
Dist 3dB Peak [mm]		10.9

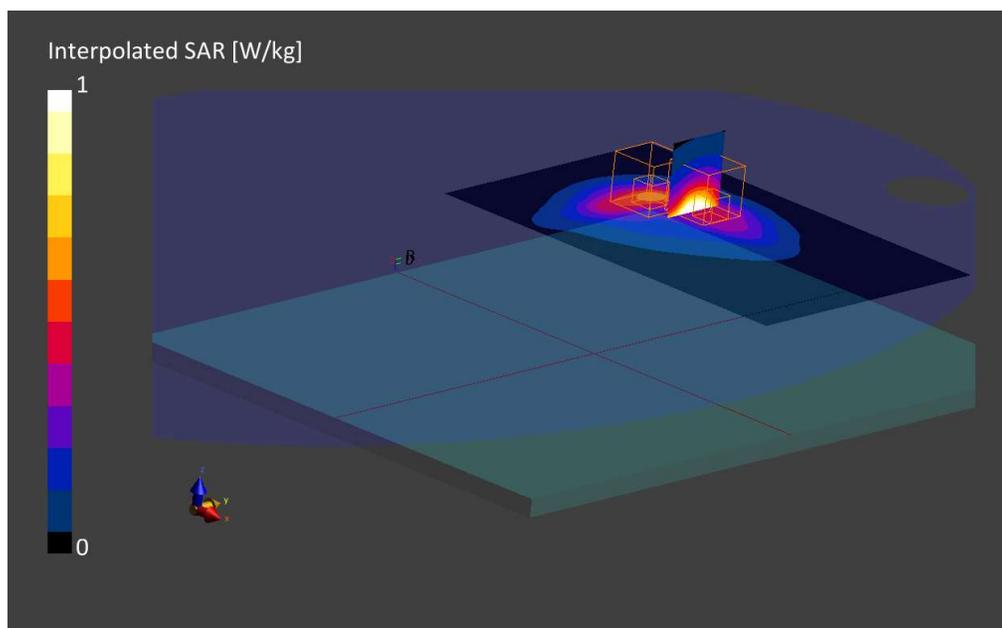

6. LTE Band 13, QPSK - 10MHz, CH23230

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I59C	300.0 x 220.0 x 8.0	C892NQ000Q	Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Laptop, 0.00	Band 13, E-UTRA/FDD	LTE-FDD, 10175-CAG	782.0, 23230	9.69	0.99	52.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2023-Jan-12	EX3DV4 - SN7455, 2022-03-21	DAE Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-12, 08:48	2023-01-12, 08:54
psSAR1g [W/Kg]	0.920	0.934
psSAR10g [W/Kg]	0.582	0.541
Power Drift [dB]	0.02	0.00
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		81.1
Dist 3dB Peak [mm]		11.8

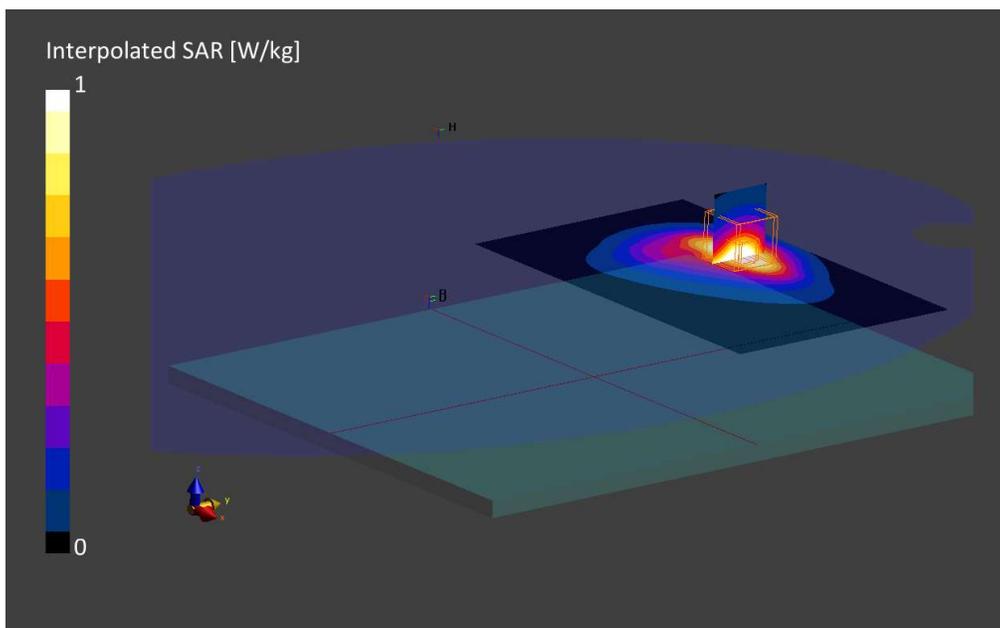

7. LTE Band 14, QPSK - 10MHz, CH23330

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I59C	300.0 x 220.0 x 8.0	C892NQ000Q	Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Laptop, 0.00	Band 14, E-UTRA/FDD	LTE-FDD, 10175-CAG	793.0, 23330	9.69	0.99	52.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MBBL-600-6000, 2023-Jan-12	EX3DV4 - SN7455, 2022-03-21	DAE Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-12, 14:04	2023-01-12, 14:10
psSAR1g [W/Kg]	0.924	0.934
psSAR10g [W/Kg]	0.583	0.542
Power Drift [dB]	0.00	-0.00
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		80.5
Dist 3dB Peak [mm]		11.8

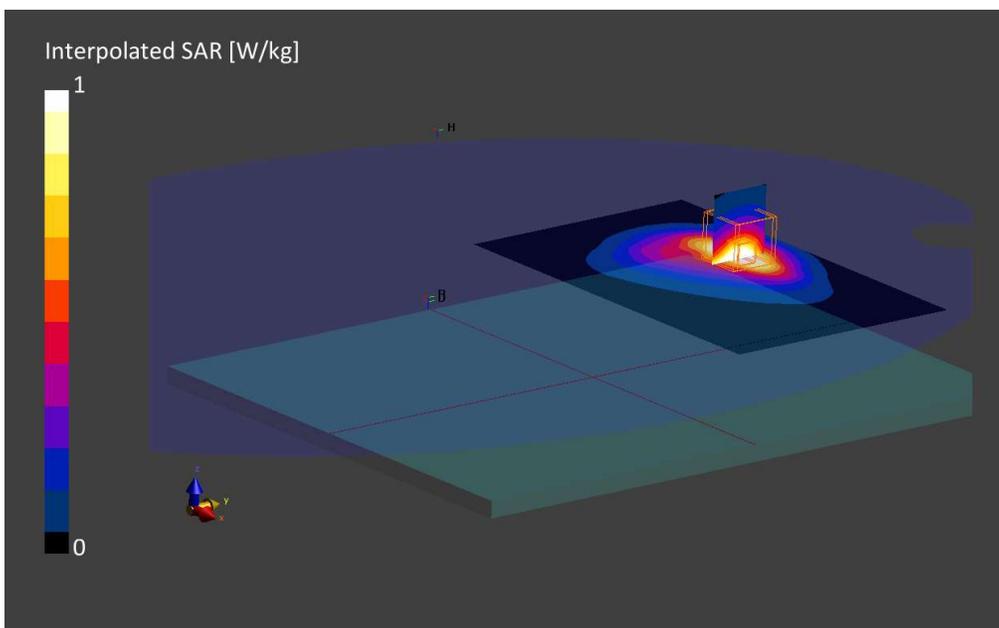

8. LTE Band 25, QPSK - 20MHz, CH26365

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I59C	300.0 x 220.0 x 8.0	C892NQ000Q	Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Laptop, 0.00	Band 25, E-UTRA/FDD	LTE-FDD, 10169-CAE	1882.5, 26365	7.59	1.61	51.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MBBL-600-6000, 2023-Jan-17	EX3DV4 - SN7455, 2022-03-21	DAE4ip Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-17, 10:04	2023-01-17, 10:10
psSAR1g [W/Kg]	0.776	0.844
psSAR10g [W/Kg]	0.423	0.414
Power Drift [dB]	-0.13	-0.11
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		81.2
Dist 3dB Peak [mm]		8.7

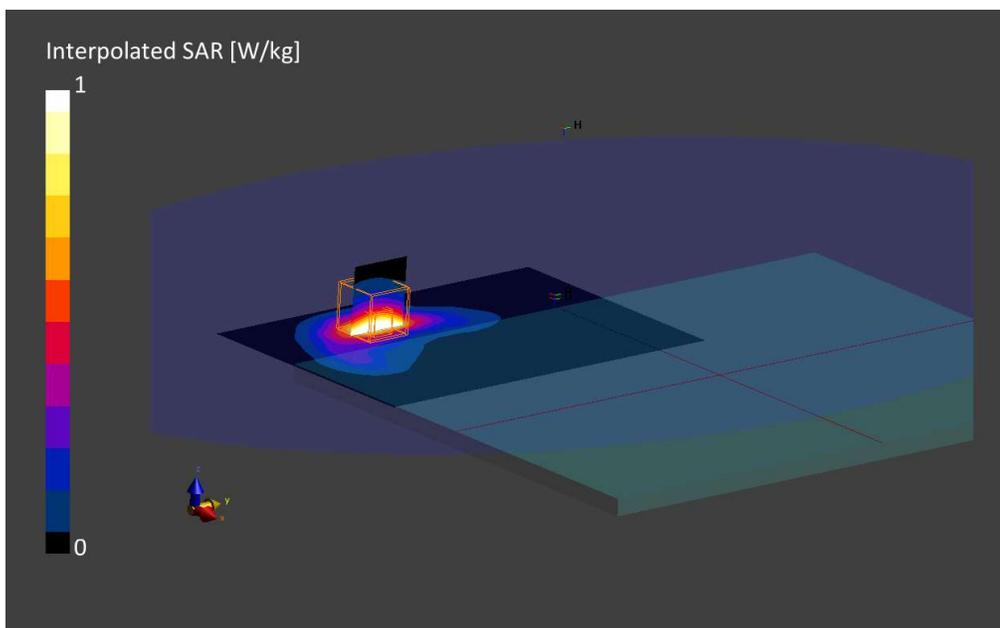

9. LTE Band 26, QPSK - 15MHz, CH26865

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I59C	300.0 x 220.0 x 8.0	C892NQ000Q	Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Laptop, 0.00	Band 26 E-UTRA/FDD	LTE-FDD, 10160-CAE	831.5, 26865	9.34	1.01	52.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2023-Jan-12	EX3DV4 - SN7455, 2022-03-21	DAE4ip Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-12, 19:38	2023-01-12, 19:44
psSAR1g [W/Kg]	0.809	0.898
psSAR10g [W/Kg]	0.521	0.522
Power Drift [dB]	0.01	0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		82.1
Dist 3dB Peak [mm]		11.4

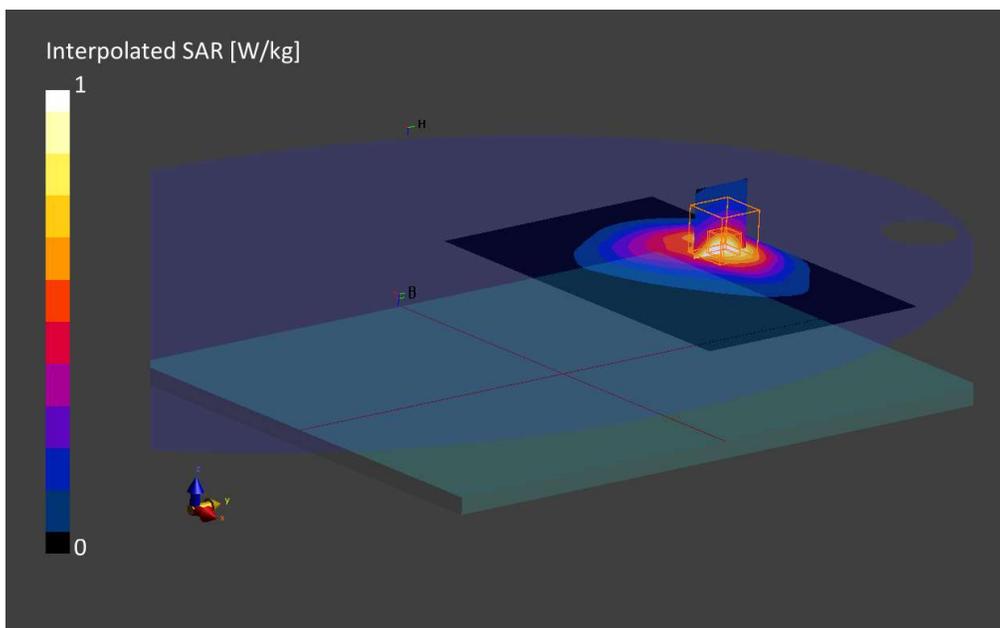

10.LTE Band 30 QPSK - 10MHz, CH27710

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I59C	300.0 x 220.0 x 8.0	C892NQ003S	Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Laptop, 0.00	Band 30, E-UTRA/FDD	LTE-FDD, 10154-CAG	2310.0, 27710	7.51	1.92	50.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2023-Jan-12	EX3DV4 - SN7455, 2022-03-21	DAE4ip Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-12, 11:03	2023-01-12, 11:11
psSAR1g [W/Kg]	0.792	0.790
psSAR10g [W/Kg]	0.422	0.411
Power Drift [dB]	0.02	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		80.6
Dist 3dB Peak [mm]		10.0

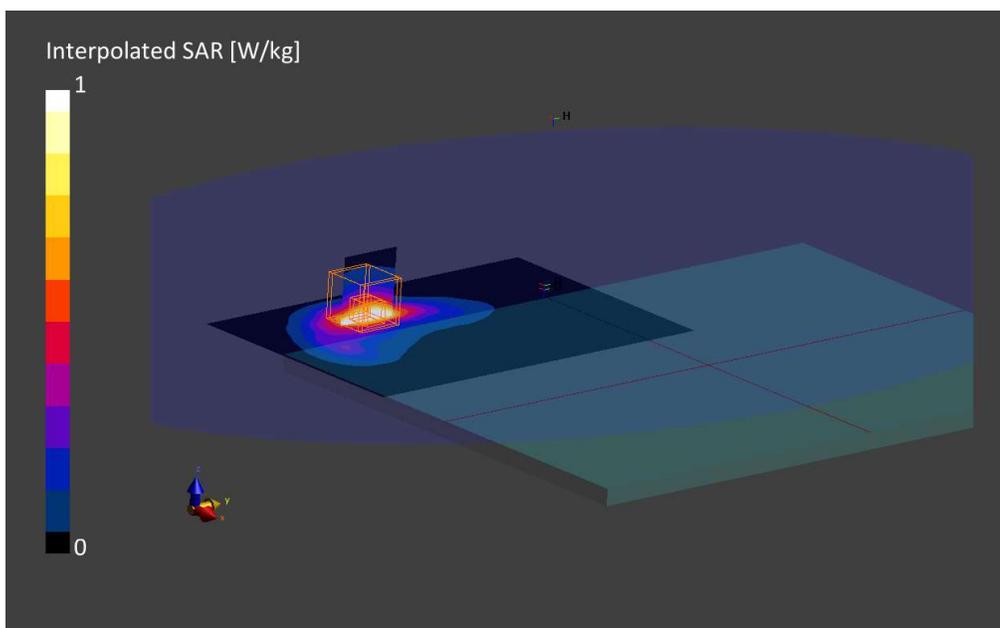

11.LTE Band 41, QPSK - 20MHz, CH40620

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I59C	300.0 x 220.0 x 8.0	C892NQ000Q	Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Laptop, 0.00	Band 41, E-UTRA/TDD	LTE-TDD, 10435-AAF	2593.0, 40620	7.3	2.19	50.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2023-Jan-12	EX3DV4 - SN7455, 2022-03-21	DAE4ip Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	160.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-13, 18:22	2023-01-13, 18:29
psSAR1g [W/Kg]	0.403	0.410
psSAR10g [W/Kg]	0.208	0.202
Power Drift [dB]	0.02	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		78.2
Dist 3dB Peak [mm]		11.2

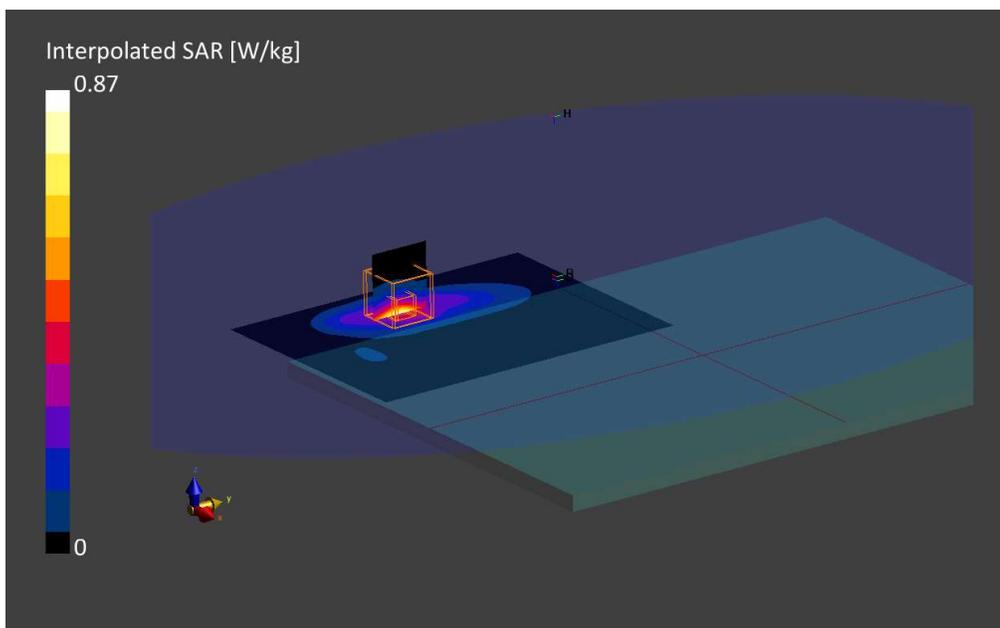

12.LTE Band 48, QPSK - 20MHz, CH55990

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I59C	300.0 x 220.0 x 8.0	C892NQ000Q	Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Laptop, 0.00	Band 48, E-UTRA/TDD	LTE-TDD, 10172-CAG	3625.0, 55990	6.13	3.26	48.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2023-Jan-12	EX3DV4 - SN7455, 2022-03-21	DAE4ip Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	160.0 x 120.0	28.0 x 28.0 x 28.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-13, 18:50	2023-01-13, 18:57
psSAR1g [W/Kg]	0.239	0.236
psSAR10g [W/Kg]	0.092	0.087
Power Drift [dB]	-0.14	0.10
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		75.6
Dist 3dB Peak [mm]		6.7

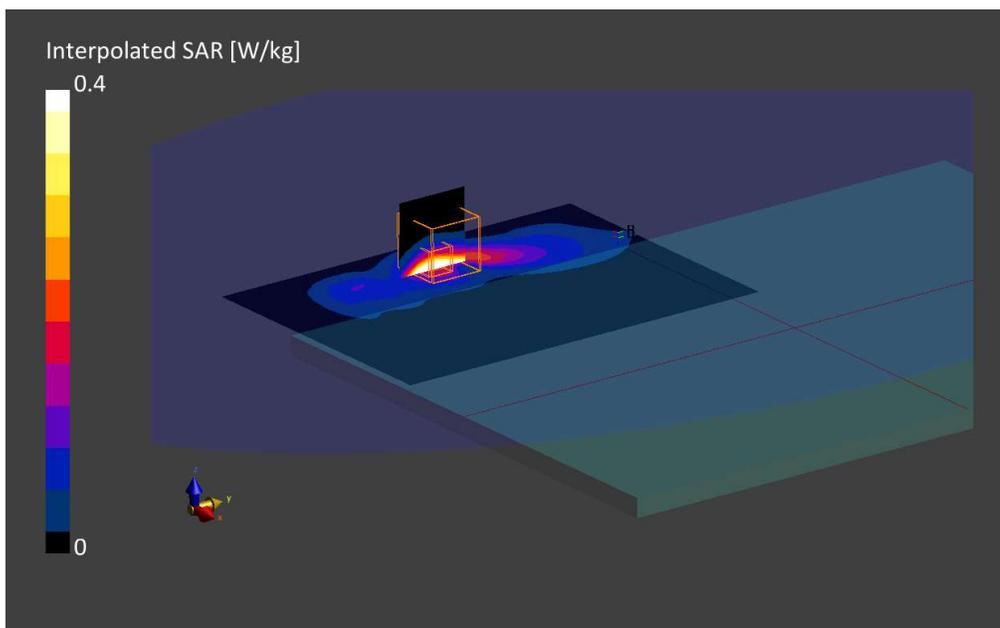

13. LTE Band 66, QPSK - 20MHz, CH132572

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I59C	300.0 x 220.0 x 8.0	C892NQ000Q	Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Laptop, 0.00	Band 66, E-UTRA/FDD	LTE-FDD, 10297-AAD	1770.0, 132572	7.91	1.53	51.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2023-Jan-17	EX3DV4 - SN7455, 2022-03-21	DAE4ip Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-17, 16:19	2023-01-17, 16:26
psSAR1g [W/Kg]	0.751	0.864
psSAR10g [W/Kg]	0.414	0.429
Power Drift [dB]	0.01	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		83.0
Dist 3dB Peak [mm]		8.5

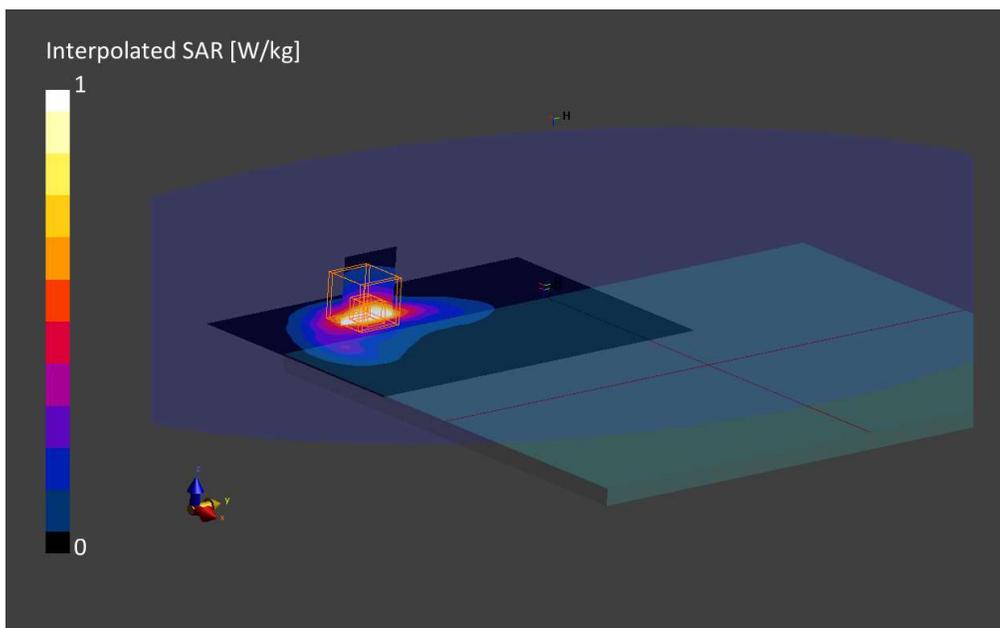

14. LTE Band 71, QPSK - 20MHz, CH133297

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I59C	300.0 x 220.0 x 8.0	C892NQ000Q	Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Laptop, 0.00	Band 71, E-UTRA/FDD	LTE-FDD, 10100-CAE	680.5, 133297	9.69	0.95	53.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2023-Jan-12	EX3DV4 - SN7455, 2022-03-21	DAE4ip Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-12, 16:18	2023-01-12, 16:24
psSAR1g [W/Kg]	0.925	0.946
psSAR10g [W/Kg]	0.597	0.536
Power Drift [dB]	-0.01	0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		80.4
Dist 3dB Peak [mm]		9.9

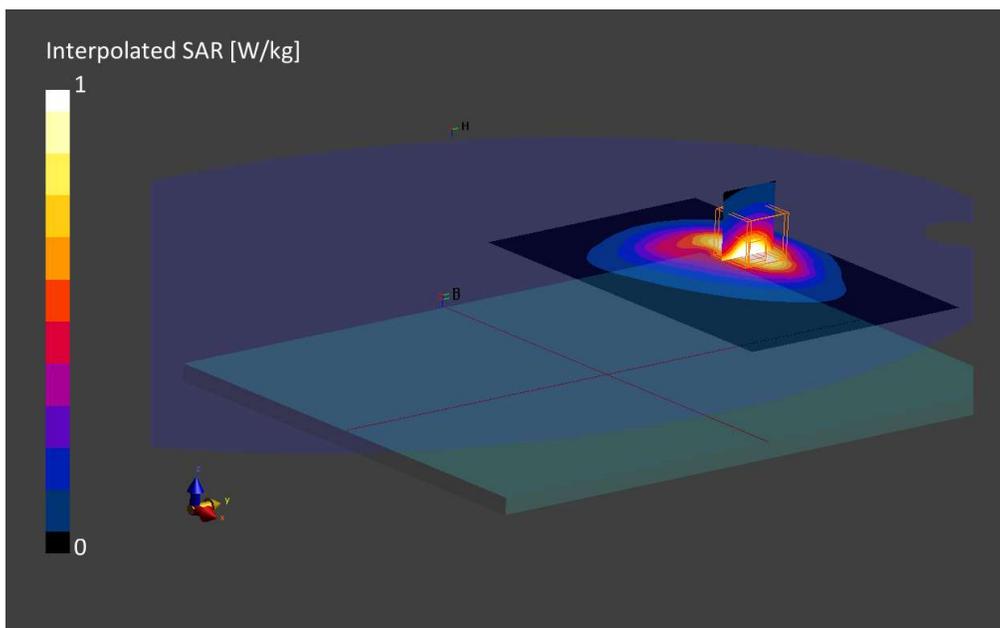

15.NR FR1 Band 2, QPSK - 20MHz, CH376000

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I59C	300.0 x 220.0 x 8.0	C892NQ000Q	Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Laptop, 0.00	Band n2	5G NR FR1 FDD, 10931-AAB	1880.0, 376000	7.59	1.61	51.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2023-Jan-17	EX3DV4 - SN7455, 2022-03-21	DAE4ip Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-17, 15:44	2023-01-17, 15:53
psSAR1g [W/Kg]	0.808	0.780
psSAR10g [W/Kg]	0.410	0.382
Power Drift [dB]	-0.02	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		82.2
Dist 3dB Peak [mm]		8.7

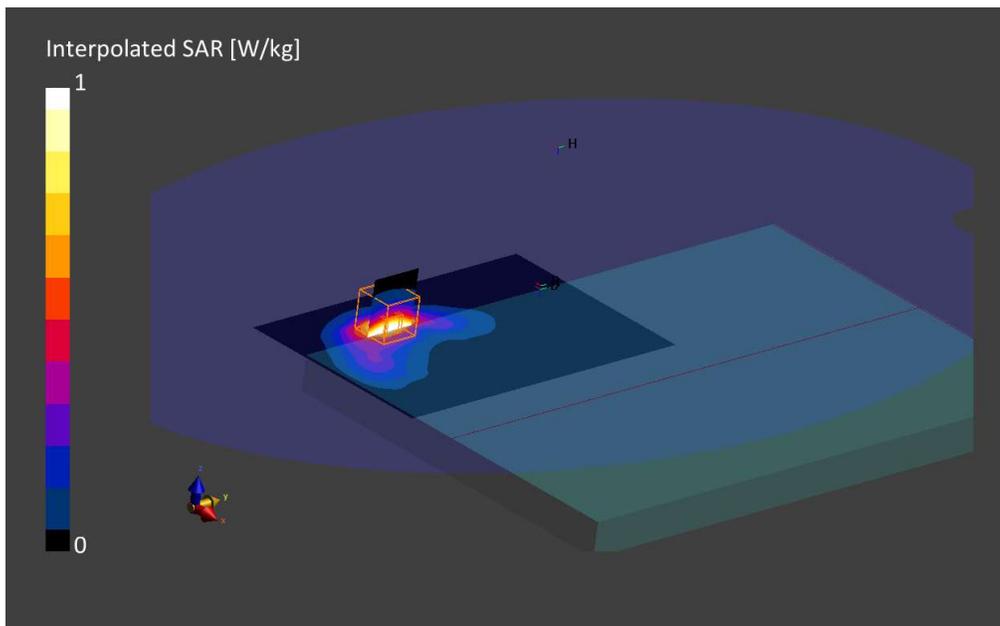

16. NR FR1 Band 5, QPSK - 20MHz, CH167300

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I59C	300.0 x 220.0 x 8.0	C892NQ000Q	Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Laptop, 0.00	Band n5	5G NR FR1 FDD, 10931-AAB	836.5, 167300	9.34	1.00	51.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2023-Jan-23	EX3DV4 - SN7455, 2022-03-21	DAE4ip Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	160.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-24, 00:15	2023-01-24, 00:22
psSAR1g [W/Kg]	0.766	0.777
psSAR10g [W/Kg]	0.470	0.451
Power Drift [dB]	-0.01	-0.08
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		81.4
Dist 3dB Peak [mm]		11.8

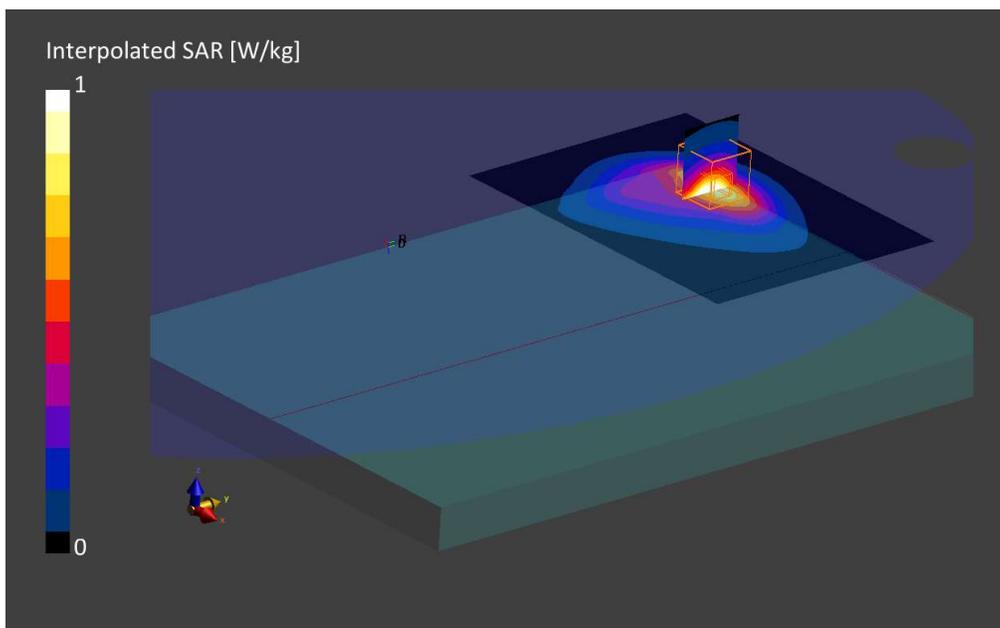

17.NR FR1 Band 7, QPSK - 20MHz, CH507000

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I59C	300.0 x 220.0 x 8.0	C892NQ003S	Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Laptop, 0.00	Band n7	5G NR FR1 FDD, 10947-AAB	2535.0, 507000	7.3	2.12	49.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2023-Jan-23	EX3DV4 - SN7455, 2022-03-21	DAE4ip Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	160.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-23, 22:26	2023-01-23, 22:35
psSAR1g [W/Kg]	0.485	0.504
psSAR10g [W/Kg]	0.248	0.244
Power Drift [dB]	-0.00	0.03
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction [dB]	Positive Only	Positive Only
M2/M1 [%]		79.9
Dist 3dB Peak [mm]		8.5

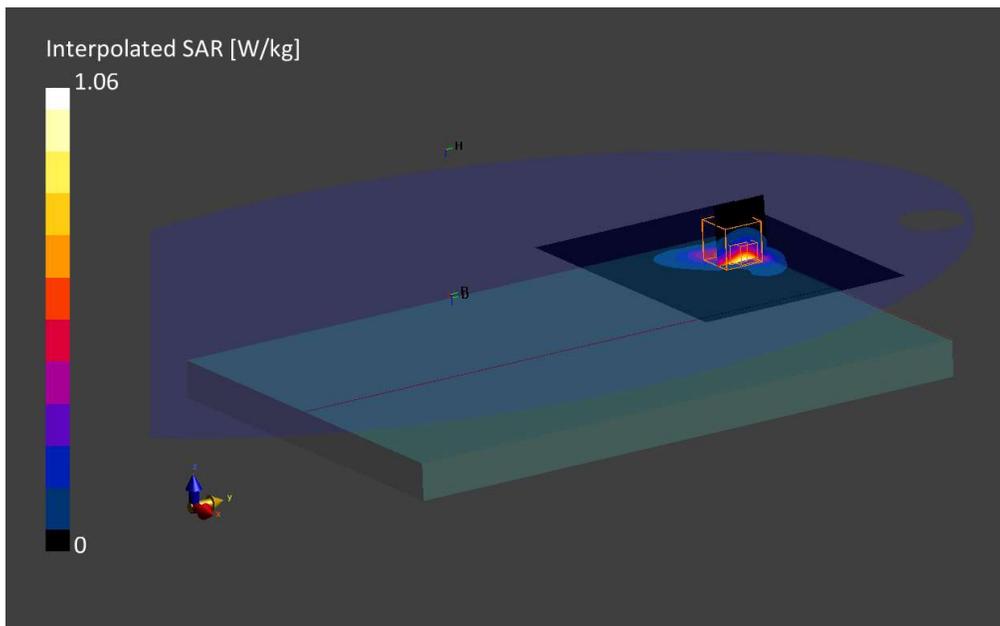

18. NR FR1 Band 25, QPSK - 20MHz, CH376500

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I59C	300.0 x 220.0 x 8.0	C892NQ000Q	Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Laptop, 0.00	Band n25	5G NR FR1 FDD, 10931-AAB	1882.5, 376500	7.59	1.58	50.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2023-Jan-23	EX3DV4 - SN7455, 2022-03-21	DAE4ip Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	160.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-23, 22:06	2023-01-23, 22:13
psSAR1g [W/Kg]	0.677	0.699
psSAR10g [W/Kg]	0.360	0.352
Power Drift [dB]	-0.00	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		81.4
Dist 3dB Peak [mm]		9.4

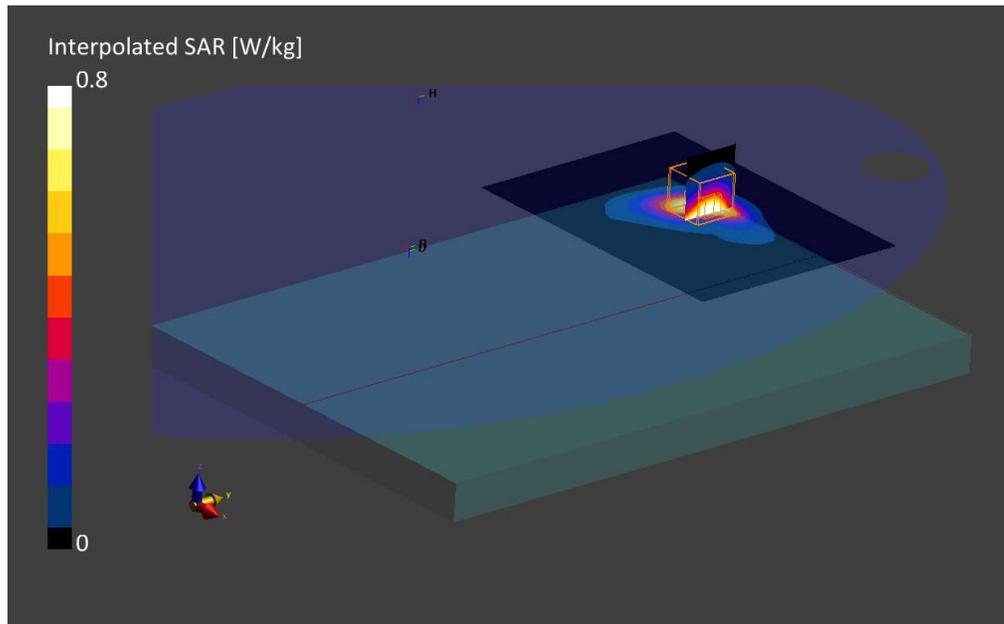

19. NR FR1 Band 30, QPSK - 10MHz, CH462000

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I59C	300.0 x 220.0 x 8.0	C892NQ000Q	Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Laptop, 0.00	Band n30	5G NR FR1 FDD, 10937-AAB	2310.0, 462000	7.51	1.89	50.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2023-Jan-23	EX3DV4 - SN7455, 2022-03-21	DAE Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	160.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-23, 20:41	2023-01-23, 20:50
psSAR1g [W/Kg]	0.588	0.585
psSAR10g [W/Kg]	0.299	0.292
Power Drift [dB]	-0.05	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]	80.1	80.1
Dist 3dB Peak [mm]		10.3

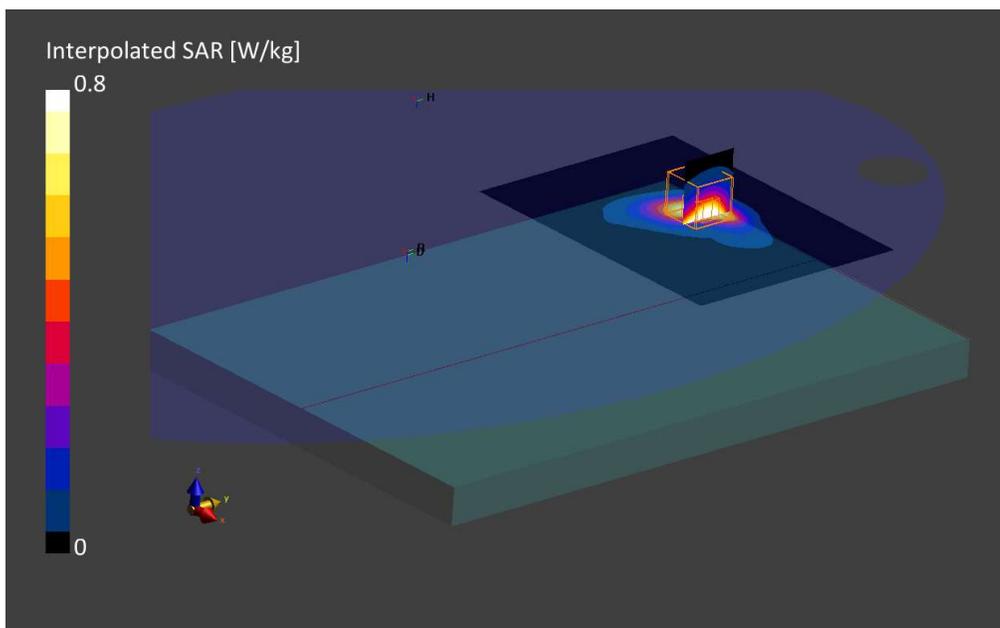

20. NR FR1 Band 41, QPSK - 100MHz, CH518598

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I59C	300.0 x 220.0 x 8.0	C892NQ003S	Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Laptop, 0.00	Band n41	5G NR FR1 TDD, 10917-AAB	2593.0, 518598	7.3	2.17	49.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2023-Jan-23	EX3DV4 - SN7455, 2022-03-21	DAE Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	160.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-24, 11:32	2023-01-24, 11:40
psSAR1g [W/Kg]	0.632	0.642
psSAR10g [W/Kg]	0.344	0.329
Power Drift [dB]		0
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		79.5
Dist 3dB Peak [mm]		13.9

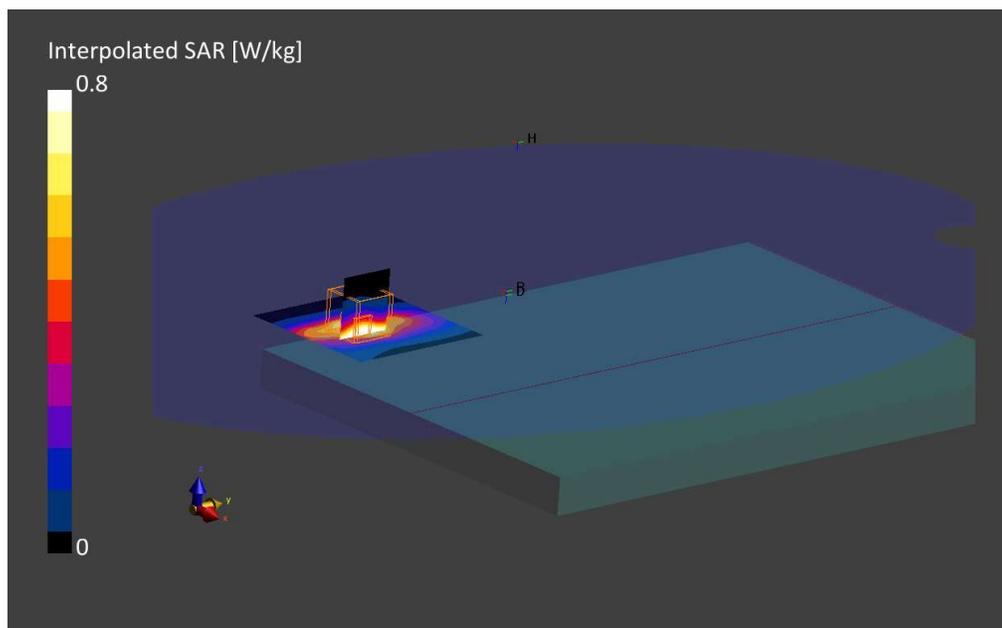

21.NR FR1 Band 66, QPSK - 40MHz, CH349000

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I59C	300.0 x 220.0 x 8.0	C892NQ000Q	Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Laptop, 0.00	Band n66	5G NR FR1 FDD, 10934-AAB	1745.0, 349000	7.91	1.49	50.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2023-Jan-23	EX3DV4 - SN7455, 2022-03-21	DAE Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	160.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-23, 20:00	2023-01-23, 20:07
psSAR1g [W/Kg]	0.765	0.783
psSAR10g [W/Kg]	0.415	0.399
Power Drift [dB]	0.00	0.03
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		82.1
Dist 3dB Peak [mm]		9.4

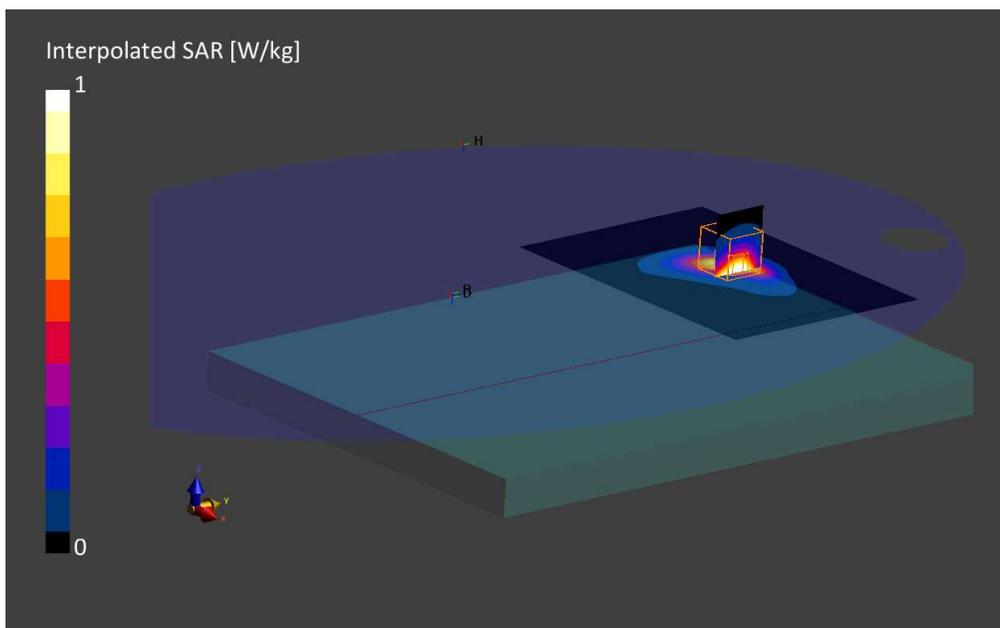

22.NR FR1 Band 71, QPSK - 20MHz, CH349000

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I59C	300.0 x 220.0 x 8.0	C892NQ000Q	Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Laptop, 0.00	Band n71	5G NR FR1 FDD, 10931-AAB	680.5, 136100	9.69	0.955	51.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2023-Jan-23	EX3DV4 - SN7455, 2022-03-21	DAE Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-25, 09:59	2023-01-25, 10:07
psSAR1g [W/Kg]	1.01	0.996
psSAR10g [W/Kg]	0.627	0.565
Power Drift [dB]	0.00	0.01
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction [dB]	Positive Only	Positive Only
M2/M1 [%]		78.6
Dist 3dB Peak [mm]		10.3

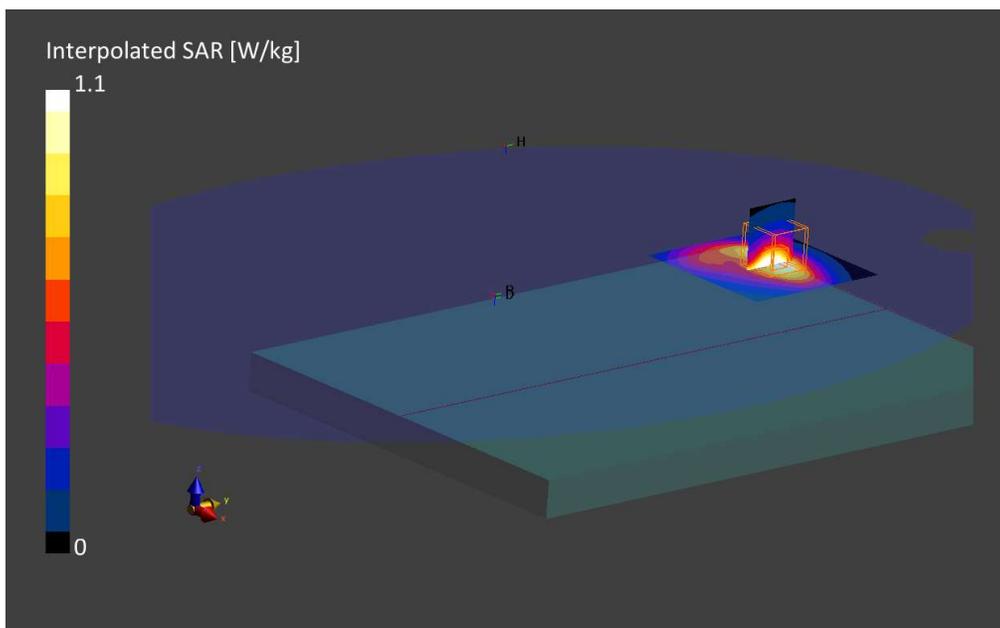

23.NR FR1 Band 77, QPSK - 20MHz, CH650000

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I59C	300.0 x 220.0 x 8.0	C892NQ000Q	Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Laptop, 0.00	Band n77	5G NR FR1 TDD, 10917-AAB	3750.0, 650000	6.13	3.37	47.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2023-Jan-23	EX3DV4 - SN7455, 2022-03-21	DAE Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	160.0 x 120.0	28.0 x 28.0 x 28.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-24, 01:42	2023-01-24, 01:50
psSAR1g [W/Kg]	0.536	0.548
psSAR10g [W/Kg]	0.254	0.247
Power Drift [dB]	0.10	0.08
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		72.8
Dist 3dB Peak [mm]		10.8

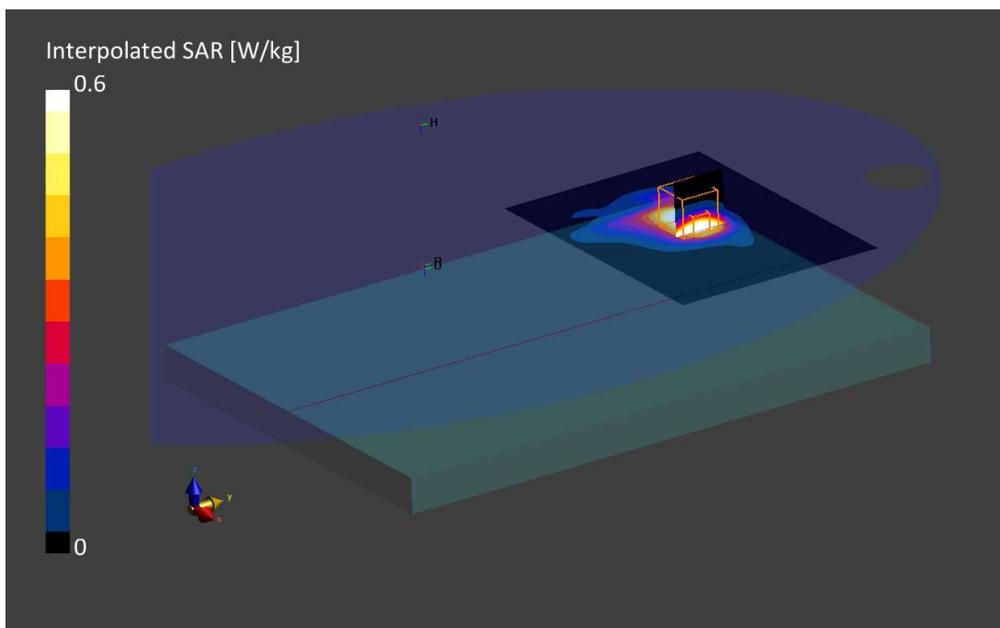

24. System Check Body Liquid 750MHz – 2023-01-12

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
Dipole 750MHz, SPEAG	50.0 x 10.0 x 8.0	1136	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		0--	750.0, 0	9.69	0.98	53.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2023-Jan-12	EX3DV4 - SN7455, 2022-03-21	DAE4ip Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-12, 17:29	2023-01-12, 17:34
psSAR1g [W/Kg]	0.431	0.426
psSAR10g [W/Kg]	0.286	0.278
Power Drift [dB]	0.01	-0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		86.3
Dist 3dB Peak [mm]		17.2

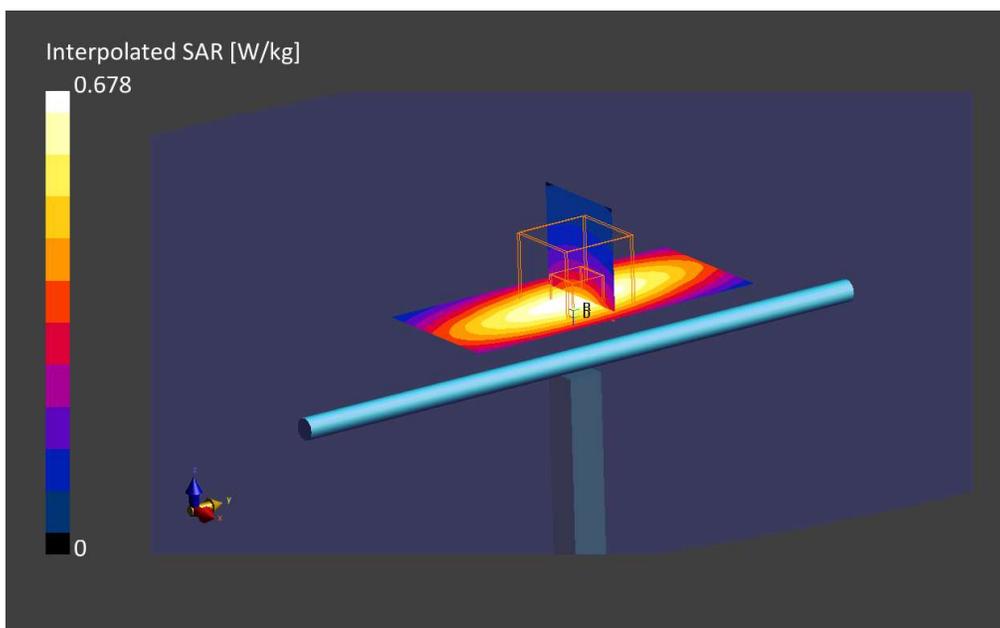

25. System Check Body Liquid 750MHz – 2023-01-25

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
Dipole 750MHz, SPEAG	50.0 x 10.0 x 8.0	1136	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		0--	750.0	9.69	0.976	51.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2023-Jan-23	EX3DV4 - SN7455, 2022-03-21	DAE4ip Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-25, 18:18	2023-01-25, 18:23
psSAR1g [W/Kg]	0.435	0.426
psSAR10g [W/Kg]	0.289	0.273
Power Drift [dB]	-0.06	-0.06
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		86.1
Dist 3dB Peak [mm]		21.2

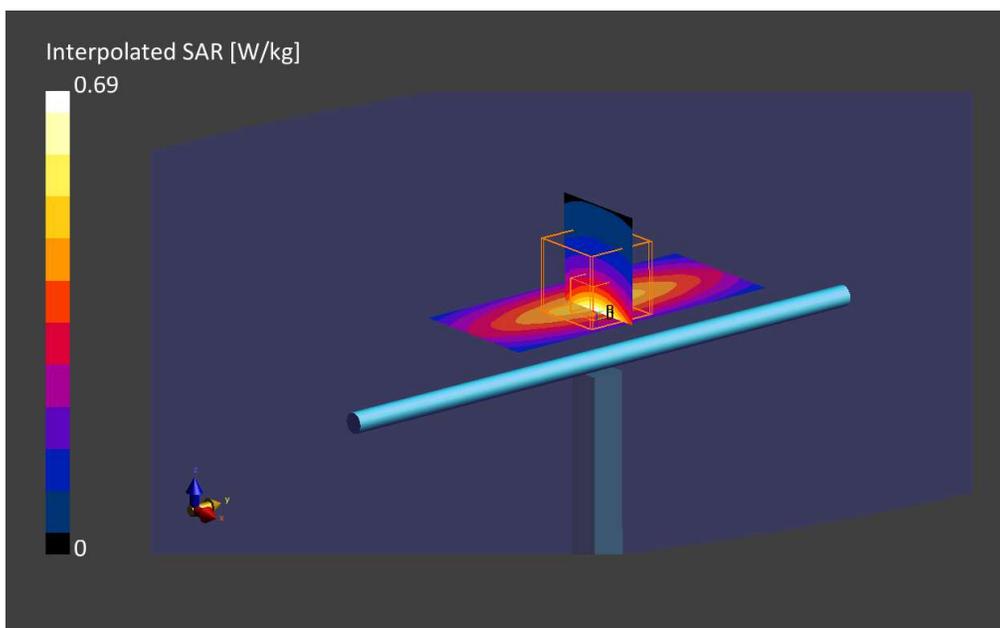

26. System Check Body Liquid 835MHz – 2023-01-12

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
Dipole 835MHz, SPEAG	50.0 x 10.0 x 10.0	4d192	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,	,	0--	835.0	9.34	1.01	52.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2023-Jan-12	EX3DV4 - SN7455, 2022-03-21	DAE4ip Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-12, 18:45	2023-01-12, 18:50
psSAR1g [W/Kg]	0.477	0.470
psSAR10g [W/Kg]	0.315	0.304
Power Drift [dB]	0.01	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		86.5
Dist 3dB Peak [mm]		17.2

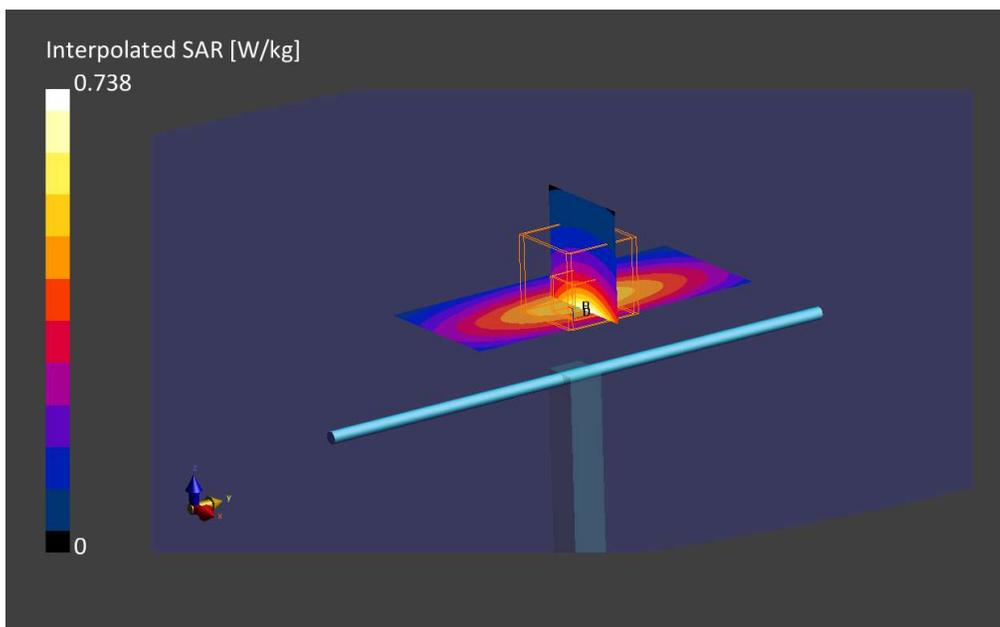

27. System Check Body Liquid 835MHz – 2023-01-24

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
Dipole 835MHz, SPEAG	50.0 x 10.0 x 10.0	4d192	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		0--	835.0	9.34	1.01	51.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2023-Jan-23	EX3DV4 - SN7455, 2022-03-21	DAE4ip Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-24, 11:30	2023-01-24, 11:35
psSAR1g [W/Kg]	0.501	0.491
psSAR10g [W/Kg]	0.329	0.316
Power Drift [dB]	0.02	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		86.8
Dist 3dB Peak [mm]		17.2

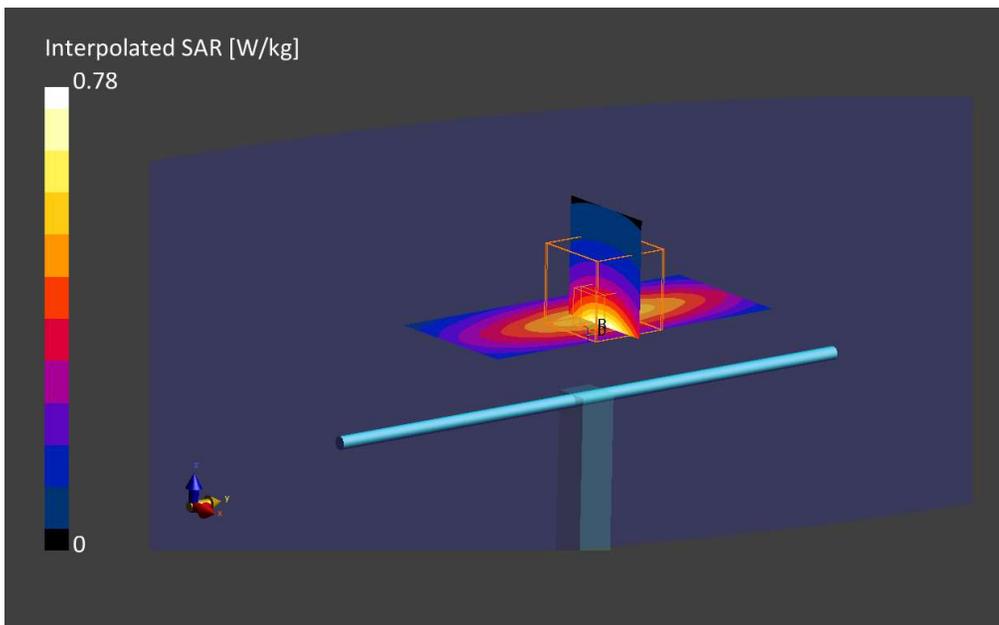

28. System Check Body Liquid 1750MHz – 2023-01-12

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
Dipole 1750MHz, SPEAG	50.0 x 10.0 x 8.0	1133	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,	,	0--	1750.0	7.91	1.50	51.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2023-Jan-12	EX3DV4 - SN7455, 2022-03-21	DAE4ip Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-12, 16:46	2023-01-12, 16:51
psSAR1g [W/Kg]	1.84	1.81
psSAR10g [W/Kg]	0.974	0.952
Power Drift [dB]	0.00	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		83.7
Dist 3dB Peak [mm]		9.6

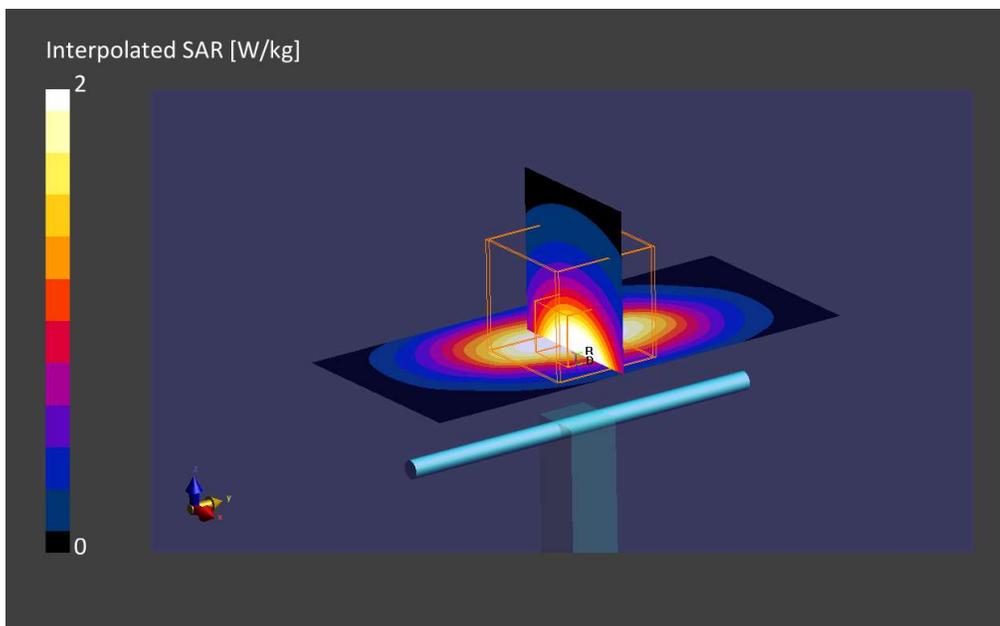

29. System Check Body Liquid 1750MHz – 2023-01-17

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
Dipole 1750MHz, SPEAG	50.0 x 10.0 x 8.0	1133	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,	,	0--	1750.0	7.91	1.52	51.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2023-Jan-17	EX3DV4 - SN7455, 2022-03-21	DAE4ip Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-17, 18:29	2023-01-17, 18:34
psSAR1g [W/Kg]	1.91	1.86
psSAR10g [W/Kg]	1.01	0.975
Power Drift [dB]	0.02	0.06
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		82.9
Dist 3dB Peak [mm]		9.7

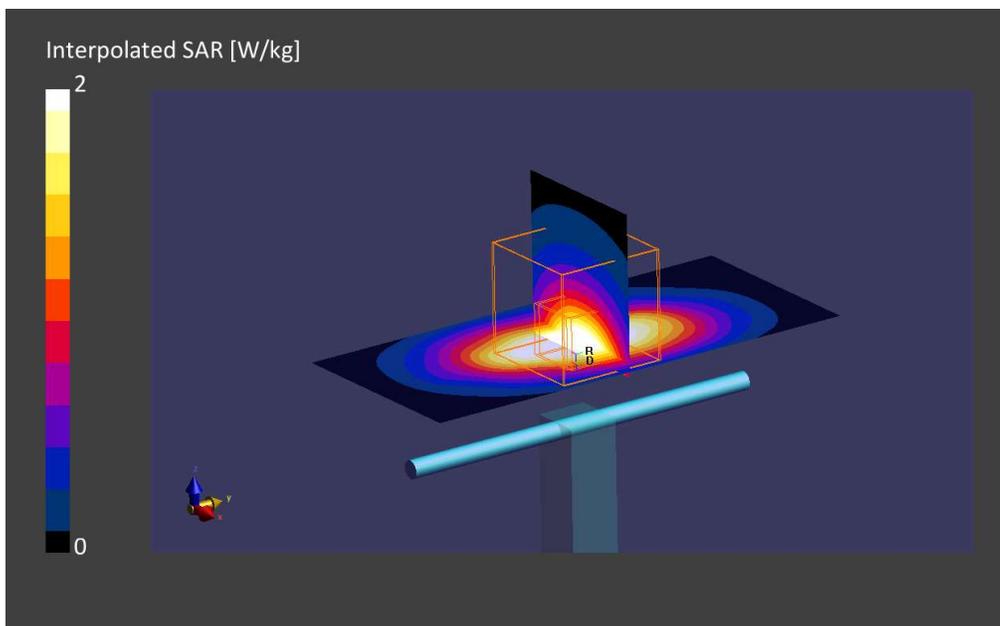

30. System Check Body Liquid 1750MHz – 2023-01-23

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
Dipole 1750MHz, SPEAG	50.0 x 10.0 x 8.0	1133	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,	,	0--	1750.0	7.91	1.50	50.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2023-Jan-17	EX3DV4 - SN7455, 2022-03-21	DAE4ip Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-23, 09:31	2023-01-23, 09:36
psSAR1g [W/Kg]	2.03	1.90
psSAR10g [W/Kg]	1.13	0.992
Power Drift [dB]	0.38	-0.07
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		82.6
Dist 3dB Peak [mm]		9.7

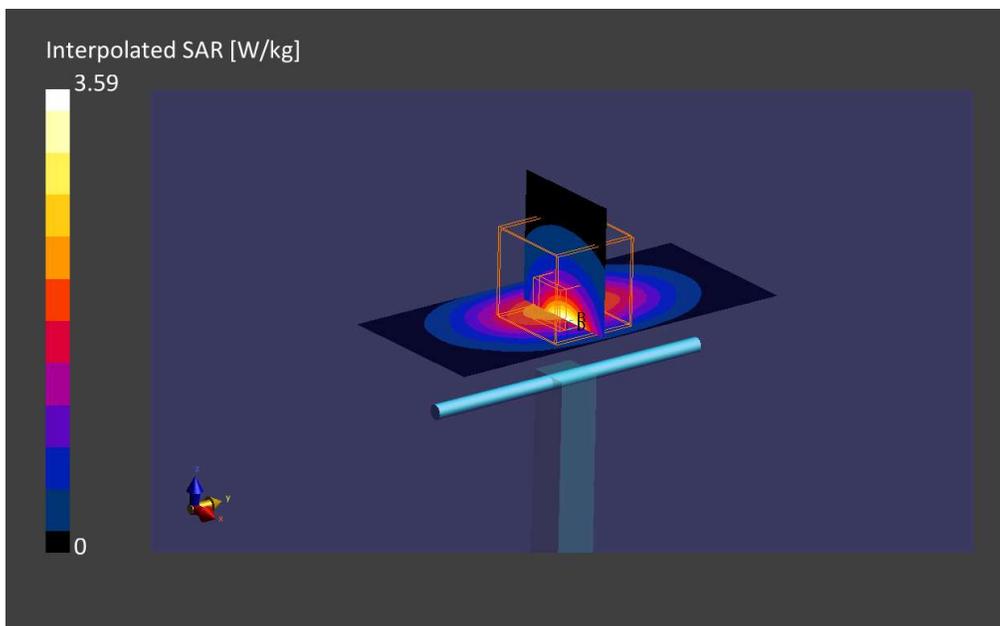

31. System Check Body Liquid 1900MHz – 2023-01-12

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
Dipole 1900MHz, SPEAG	50.0 x 10.0 x 8.0	5d197	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		0--	1900.0	7.59	1.60	51.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2023-Jan-12	EX3DV4 - SN7455, 2022-03-21	DAE4ip Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-12, 16:22	2023-01-12, 16:27
psSAR1g [W/Kg]	2.09	2.05
psSAR10g [W/Kg]	1.08	1.05
Power Drift [dB]	-0.00	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		82.7
Dist 3dB Peak [mm]		9.6

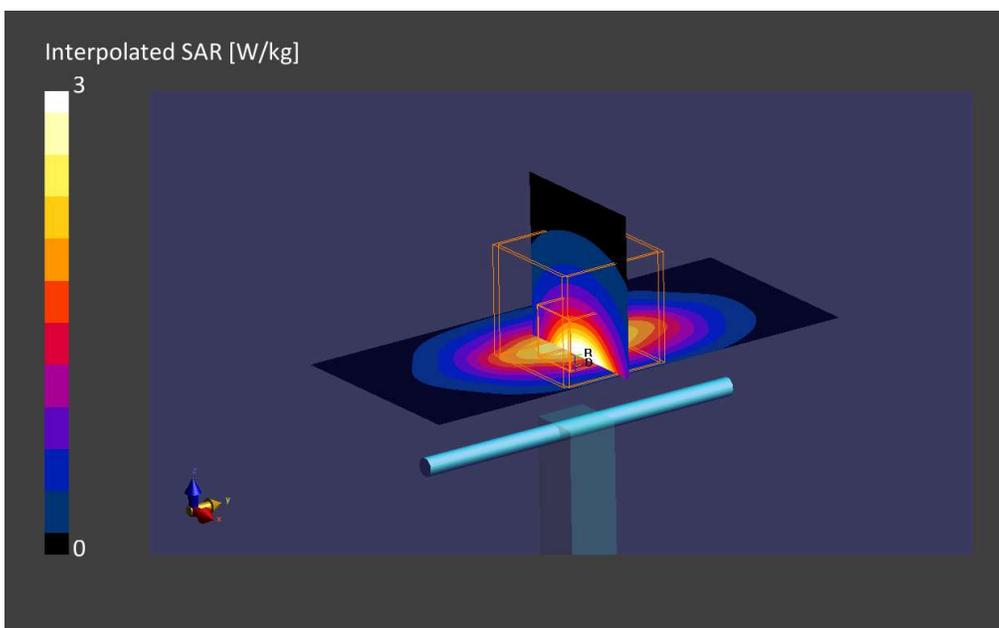

32. System Check Body Liquid 1900MHz – 2023-01-17

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
Dipole 1900MHz, SPEAG	50.0 x 10.0 x 8.0	5d197	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		0--	1900.0	7.59	1.63	51.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MBBL-600-6000, 2023-Jan-17	EX3DV4 - SN7455, 2022-03-21	DAE4ip Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-17, 18:18	2023-01-17, 18:23
psSAR1g [W/Kg]	2.12	2.09
psSAR10g [W/Kg]	1.11	1.06
Power Drift [dB]	-0.01	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		83.0
Dist 3dB Peak [mm]		9.6

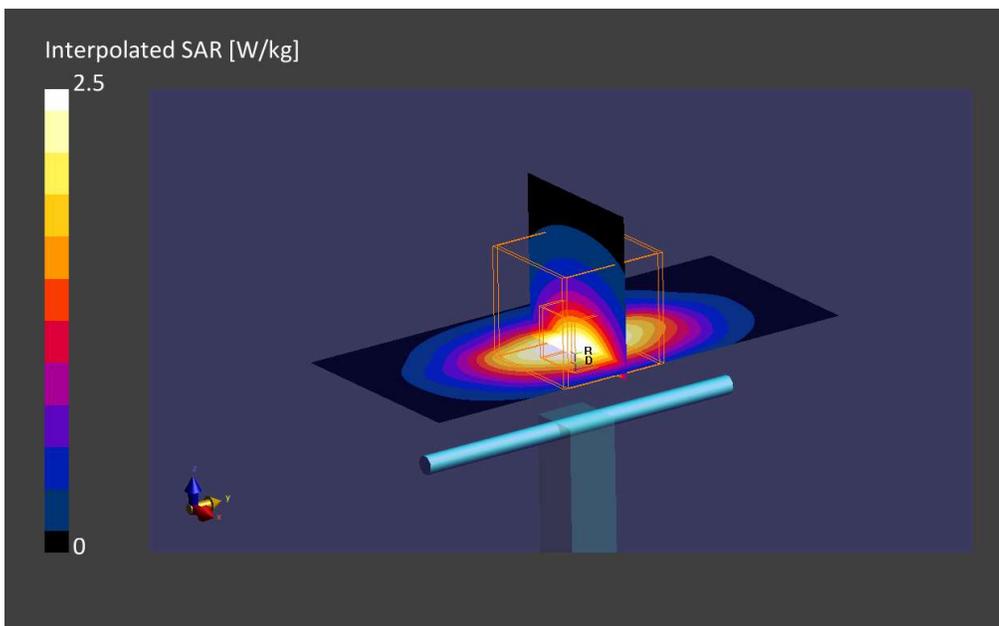

33. System Check Body Liquid 1900MHz – 2023-01-23

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
Dipole 1900MHz, SPEAG	50.0 x 10.0 x 8.0	5d197	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		0--	1900.0	7.59	1.59	50.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2023-Jan-23	EX3DV4 - SN7455, 2022-03-21	DAE4ip Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-23, 10:29	2023-01-23, 10:34
psSAR1g [W/Kg]	2.08	2.02
psSAR10g [W/Kg]	1.06	1.03
Power Drift [dB]	-0.01	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		83.0
Dist 3dB Peak [mm]		9.6

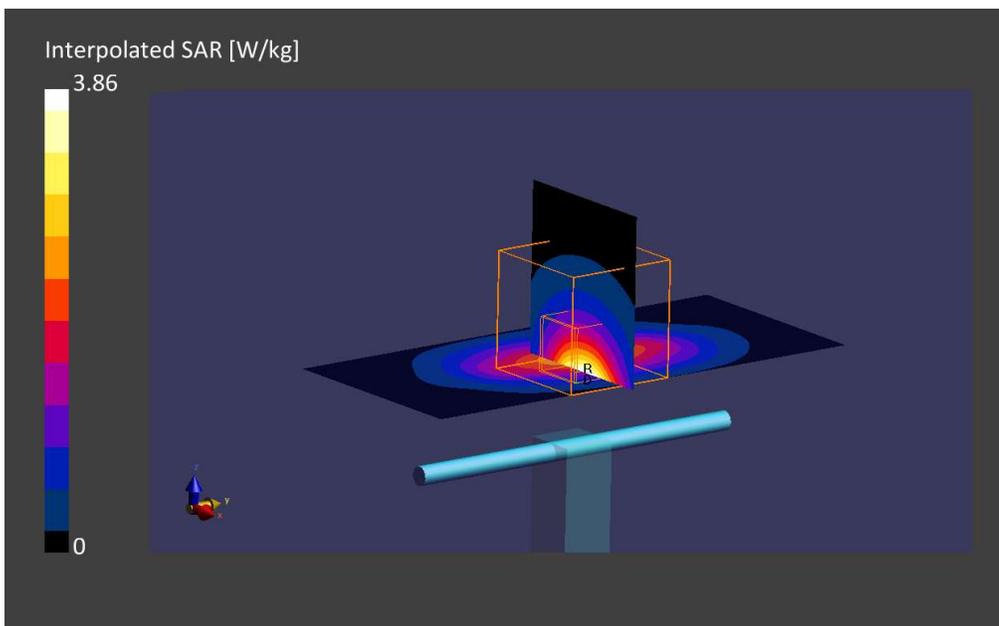

34. System Check Body Liquid 2300MHz – 2023-01-12

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
D2300MHZ, SPEAG	50.0 x 10.0 x 8.0	1046	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		0--	2300.0	7.51	1.91	50.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2023-Jan-12	EX3DV4 - SN7455, 2022-03-21	DAE4ip Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-12, 18:27	2023-01-12, 18:33
psSAR1g [W/Kg]	2.50	2.49
psSAR10g [W/Kg]	1.18	1.16
Power Drift [dB]	-0.02	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		80.3
Dist 3dB Peak [mm]		9.1

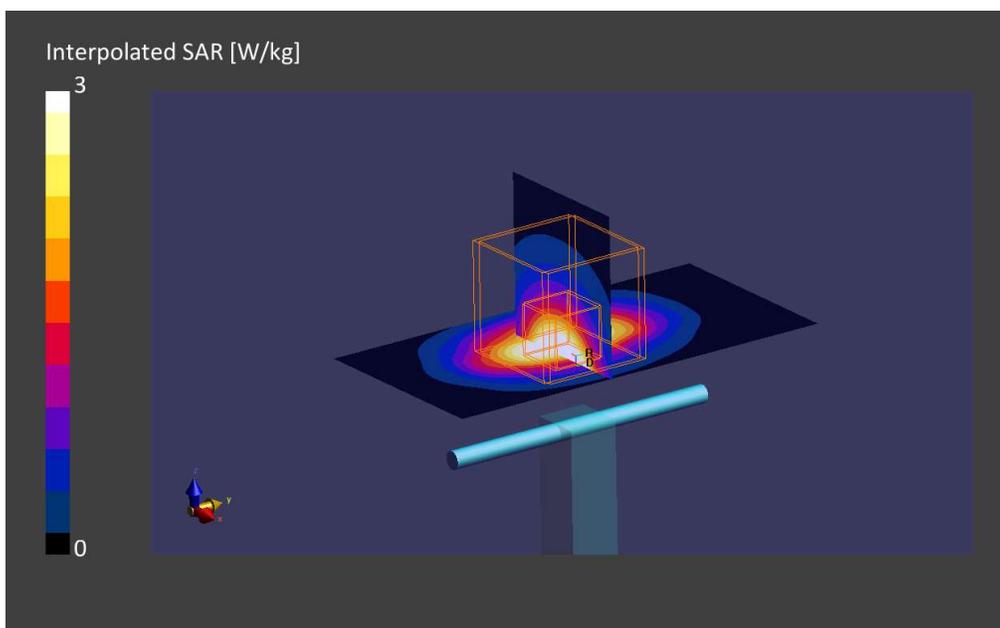

35. System Check Body Liquid 2300MHz – 2023-01-23

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
D2300MHZ, SPEAG	50.0 x 10.0 x 8.0	1046	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		0--	2300.0	7.51	1.88	50.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2023-Jan-23	EX3DV4 - SN7455, 2022-03-21	DAE4ip Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-23, 11:09	2023-01-23, 11:15
psSAR1g [W/Kg]	2.33	2.27
psSAR10g [W/Kg]	1.09	1.06
Power Drift [dB]	-0.02	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		80.3
Dist 3dB Peak [mm]		8.9

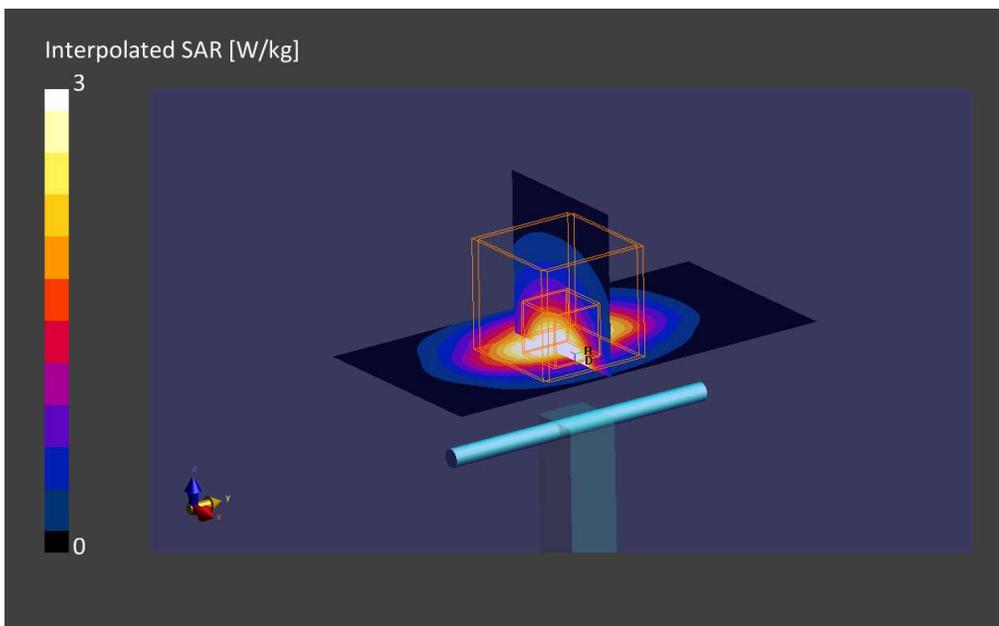

36. System Check Body Liquid 2600MHz – 2023-01-13

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
D2600MHz, SPEAG	50.0 x 10.0 x 8.0	1100	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		0--	2600.0	7.3	2.20	50.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) -	MBBL-600-6000, 2023-Jan-12	EX3DV4 - SN7455, 2022-03-21	DAE4ip Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-13, 16:57	2023-01-13, 17:04
psSAR1g [W/Kg]	2.66	2.72
psSAR10g [W/Kg]	1.25	1.20
Power Drift [dB]	0.00	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		80.2
Dist 3dB Peak [mm]		8.9

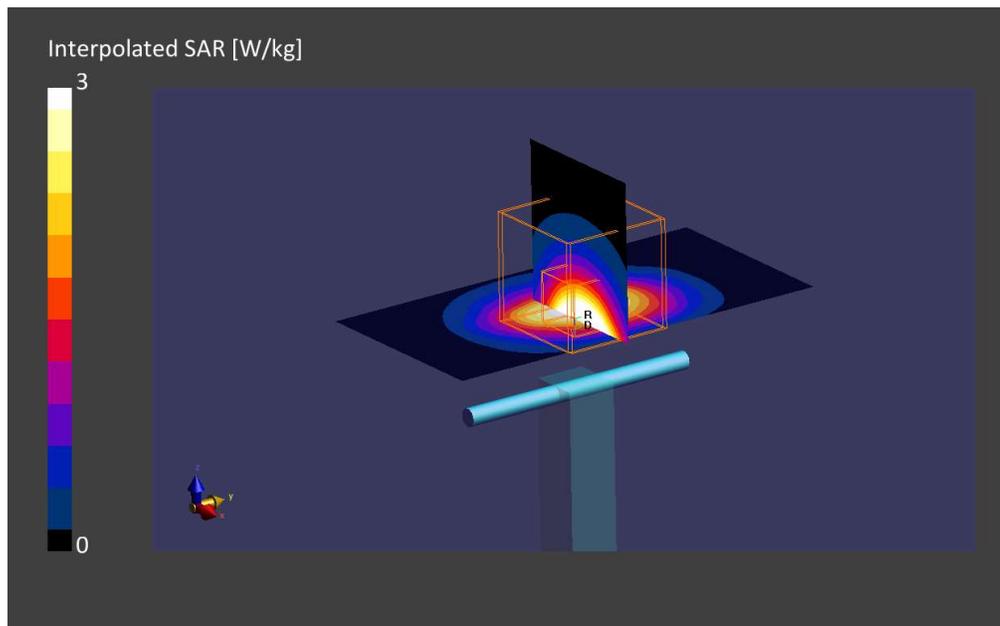

37. System Check Body Liquid 2600MHz – 2023-01-17

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
D2600MHz, SPEAG	50.0 x 10.0 x 8.0	1100	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		0--	2600.0	7.3	2.22	50.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) -	MABL-600-6000, 2023-Jan-17	EX3DV4 - SN7455, 2022-03-21	DAE4ip Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-17, 16:46	2023-01-17, 16:52
psSAR1g [W/Kg]	2.61	2.53
psSAR10g [W/Kg]	1.15	1.12
Power Drift [dB]	-0.00	0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		80.2
Dist 3dB Peak [mm]		8.9

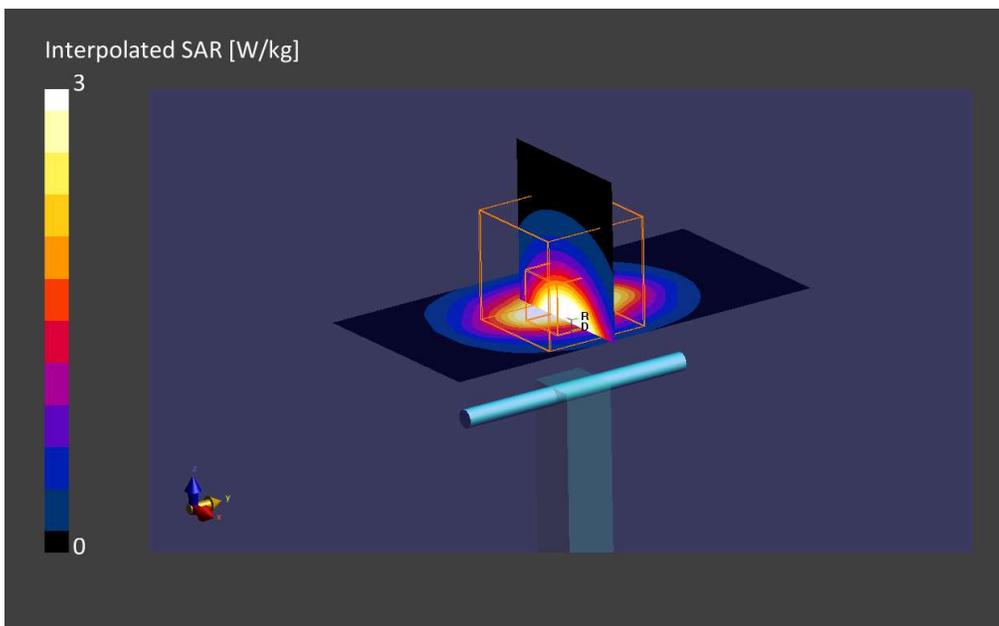

38. System Check Body Liquid 2600MHz – 2023-01-23

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
D2600MHz, SPEAG	50.0 x 10.0 x 8.0	1100	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		0--	2600.0	7.3	2.18	49.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) -	MABL-600-6000, 2023-Jan-23	EX3DV4 - SN7455, 2022-03-21	DAE4ip Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-23, 09:50	2023-01-23, 09:57
psSAR1g [W/Kg]	2.71	2.64
psSAR10g [W/Kg]	1.19	1.15
Power Drift [dB]	-0.03	-0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		80.2
Dist 3dB Peak [mm]		8.9

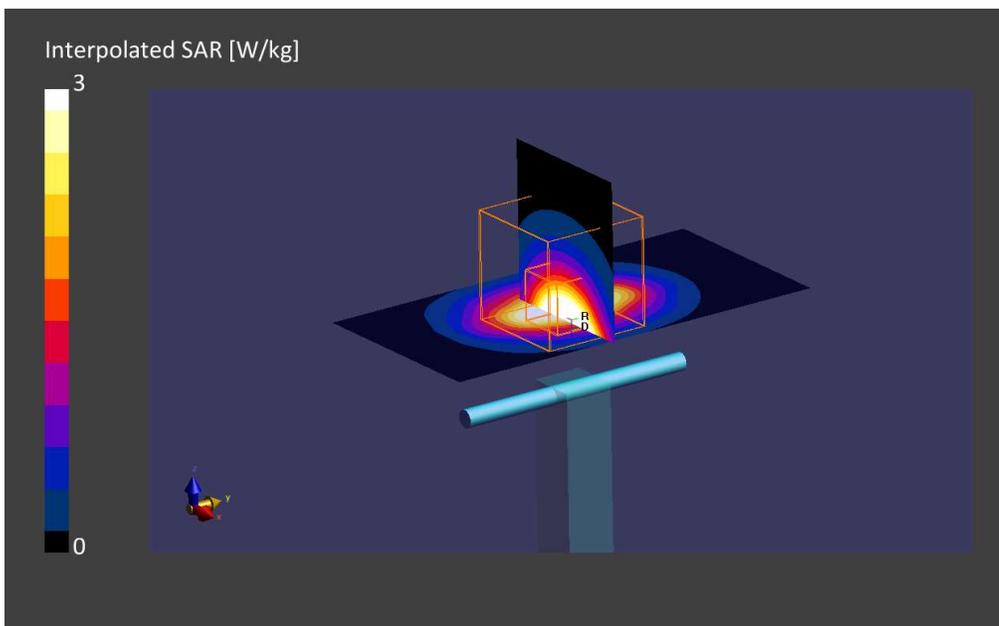

39. System Check Body Liquid 3700MHz – 2023-01-13

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
D3700MHz, SPEAG	50.0 x 10.0 x 17.0	1093	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		0--	3700.0	6.13	3.35	48.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MBBL-600-6000, 2023-Jan-12	EX3DV4 - SN7455, 2022-03-21	DAE4ip Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	28.0 x 28.0 x 28.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-13, 16:33	2023-01-13, 16:39
psSAR1g [W/Kg]	3.18	3.18
psSAR10g [W/Kg]	1.17	1.16
Power Drift [dB]	0.02	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		75.7
Dist 3dB Peak [mm]		8.0

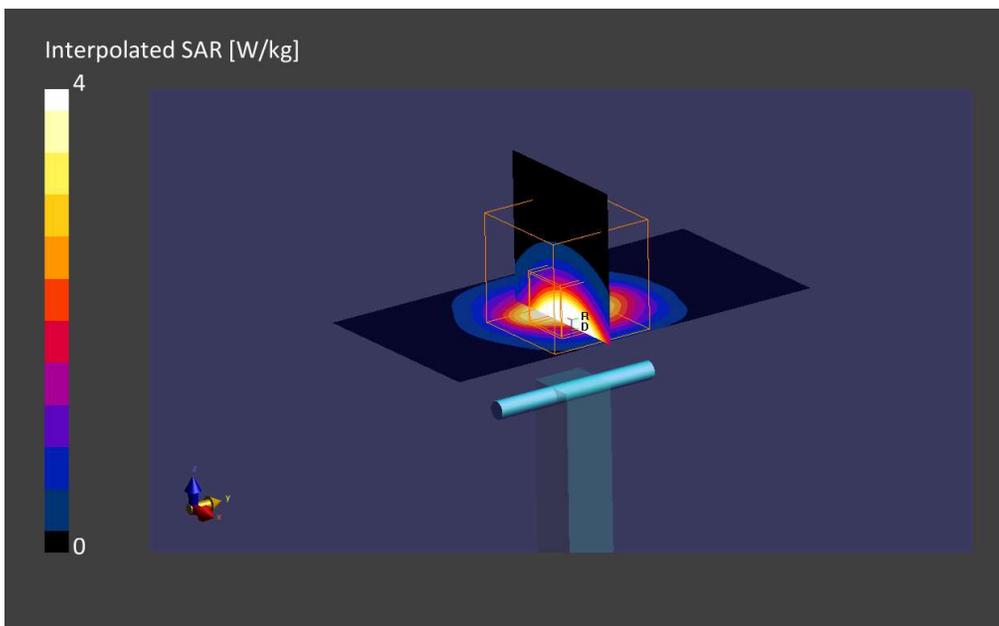

40. System Check Body Liquid 3700MHz – 2023-01-23

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
D3700MHz, SPEAG	50.0 x 10.0 x 17.0	1093	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		0--	3700.0	6.13	3.32	47.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MBBL-600-6000, 2023-Jan-23	EX3DV4 - SN7455, 2022-03-21	DAE4ip Sn1658, 2022-08-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	28.0 x 28.0 x 28.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results


	Area Scan	Zoom Scan
Date	2023-01-23, 10:18	2023-01-23, 10:25
psSAR1g [W/Kg]	3.13	3.09
psSAR10g [W/Kg]	1.14	1.13
Power Drift [dB]	0.05	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		75.9
Dist 3dB Peak [mm]		8.0

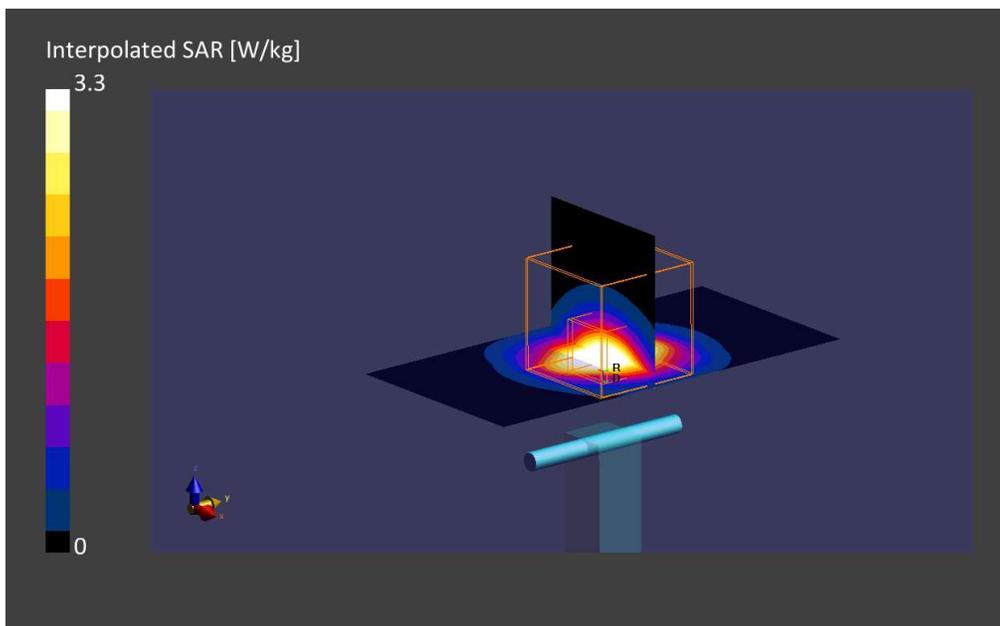

Annex D. TSL Dielectric Parameters

D.1 Body 650MHz-1950MHz

Freq. (MHz)	Target		2023-01-12		2023-01-17		2023-01-23	
			Measured					
	ϵ' (F/m)	σ (S/m)	ϵ'_1 (F/m)	σ_1 (S/m)	ϵ'_2 (F/m)	σ_2 (S/m)	ϵ'_3 (F/m)	σ_3 (S/m)
650	55.92	0.96	53.28	0.94	53.77	0.94	52.05	0.95
700	55.73	0.96	53.12	0.96	53.65	0.96	51.87	0.96
750	55.53	0.96	52.98	0.98	53.53	0.98	51.69	0.98
800	55.34	0.97	52.84	1.0	53.41	1.0	51.52	0.99
850	55.15	0.99	52.7	1.02	53.29	1.02	51.38	1.01
900	55.0	1.05	52.59	1.03	53.16	1.04	51.28	1.03
950	54.93	1.08	52.48	1.05	53.03	1.06	51.2	1.05
1000	54.84	1.1	52.39	1.08	52.9	1.09	51.14	1.07
1050	54.75	1.12	52.32	1.1	52.77	1.11	51.1	1.09
1100	54.65	1.14	52.25	1.12	52.65	1.13	51.06	1.12
1150	54.56	1.17	52.19	1.14	52.53	1.16	51.04	1.14
1200	54.47	1.19	52.15	1.17	52.41	1.18	51.03	1.17
1250	54.37	1.21	52.11	1.19	52.29	1.21	51.02	1.2
1300	54.28	1.23	52.06	1.22	52.18	1.24	51.02	1.23
1350	54.19	1.26	52.03	1.25	52.06	1.26	51.04	1.26
1400	54.09	1.28	51.99	1.28	51.94	1.29	51.05	1.29
1450	54.0	1.3	51.95	1.31	51.82	1.32	51.06	1.32
1500	53.94	1.33	51.9	1.34	51.71	1.35	51.06	1.35
1550	53.88	1.36	51.85	1.37	51.6	1.38	51.05	1.37
1600	53.81	1.39	51.79	1.4	51.5	1.42	51.02	1.4
1650	53.69	1.43	51.73	1.43	51.41	1.45	50.99	1.43
1700	53.56	1.46	51.66	1.46	51.32	1.48	50.95	1.47
1750	53.43	1.49	51.6	1.5	51.24	1.52	50.9	1.5
1800	53.3	1.52	51.53	1.53	51.17	1.55	50.85	1.53
1850	53.3	1.52	51.46	1.56	51.1	1.59	50.79	1.56
1900	53.3	1.52	51.39	1.6	51.03	1.63	50.71	1.59
1950	53.3	1.52	51.31	1.63	50.97	1.67	50.63	1.62

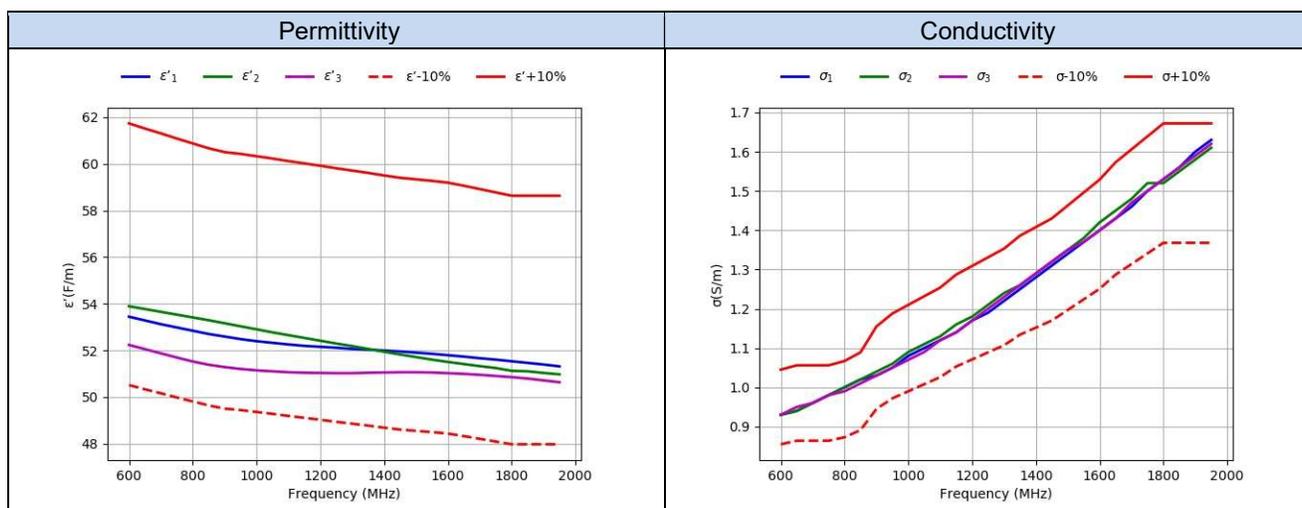

D.2 Body 2250MHz-3800MHz

Freq. (MHz)	Target		2023-01-12		2023-01-17		2023-01-23	
			Measured					
	ϵ' (F/m)	σ (S/m)	ϵ'_1 (F/m)	σ_1 (S/m)	ϵ'_2 (F/m)	σ_2 (S/m)	ϵ'_3 (F/m)	σ_3 (S/m)
2250	52.97	1.76	50.93	1.87	50.58	1.91	50.28	1.84
2300	52.9	1.81	50.85	1.91	50.52	1.95	50.18	1.88
2350	52.83	1.85	50.78	1.96	50.45	1.99	50.1	1.93
2400	52.77	1.9	50.7	2.01	50.38	2.04	50.02	1.98
2450	52.7	1.95	50.62	2.05	50.3	2.08	49.95	2.03
2500	52.64	2.02	50.54	2.1	50.21	2.13	49.87	2.08
2550	52.57	2.09	50.45	2.15	50.11	2.17	49.79	2.13
2600	52.51	2.16	50.35	2.2	50.03	2.22	49.68	2.18
2650	52.45	2.23	50.24	2.24	49.96	2.27	49.54	2.23
2700	52.38	2.3	50.12	2.29	49.89	2.32	49.38	2.27
2750	52.32	2.38	50.0	2.34	49.82	2.37	49.21	2.33
2800	52.25	2.45	49.88	2.39	49.75	2.42	49.04	2.38
2850	52.19	2.52	49.76	2.45	49.68	2.46	48.88	2.44
2900	52.13	2.59	49.65	2.5	49.59	2.51	48.75	2.5
2950	52.06	2.66	49.53	2.55	49.49	2.56	48.63	2.55
3000	52.0	2.73	49.42	2.6	49.39	2.61	48.52	2.6
3050	51.93	2.79	49.31	2.65	49.28	2.66	48.42	2.65
3100	51.86	2.85	49.2	2.7	49.18	2.72	48.31	2.7
3150	51.8	2.91	49.09	2.75	49.07	2.77	48.21	2.75
3200	51.73	2.96	48.99	2.8	48.98	2.83	48.1	2.8
3250	51.66	3.02	48.88	2.86	48.88	2.88	48.0	2.85
3300	51.59	3.08	48.79	2.91	48.79	2.93	47.91	2.91
3350	51.52	3.14	48.7	2.97	48.69	2.98	47.83	2.96
3400	51.46	3.2	48.61	3.02	48.6	3.04	47.75	3.02
3450	51.39	3.26	48.52	3.07	48.51	3.09	47.67	3.07
3500	51.32	3.31	48.43	3.12	48.41	3.15	47.6	3.11
3550	51.25	3.37	48.34	3.18	48.33	3.21	47.52	3.16
3600	51.19	3.43	48.25	3.23	48.24	3.27	47.44	3.21
3650	51.12	3.49	48.16	3.29	48.17	3.33	47.35	3.26
3700	51.05	3.55	48.08	3.35	48.09	3.39	47.27	3.32
3750	50.98	3.61	47.99	3.41	48.02	3.45	47.18	3.37
3800	50.91	3.66	47.9	3.47	47.94	3.51	47.1	3.43

