

Regulatory WWAN Antenna Information

Platform information						
Brand	ODM	Platform model name	Platform type (ex: regular NB, convertible PC, AIO...etc)			*SAR minimum separation (mm)
HP Inc.	Inventec	HSN-I62C	Convertible PC			1
Antenna information						Maximum Peak gain
Vendor	Type	Antenna Part number (Ant5 TX/RX)	Antenna Part number (Ant6 RX)	Antenna Part number (Ant7 RX)	Antenna Part number (Ant8 RX)	1980MHz (Choice TX high peak gain)
WNC	PIFA	81ELBF15.G36 (6036B0366201)	81ELBF15.G35 (6036B0366101)	81ELBF15.G37 (6036B0366301)	81ELBF15.G36 (6036B0366201)	-2.9 dBi
Module information						
Model	Form factor and suffixes (NGW/ HMW AND AN/ NB/ BN....)					
PhantasmR	Qualcomm 9205 Phantasm M.2 (CAT-M1)					

Antenna vendor connect person	
Antenna Vendor	WNC
contact person	Annie Lo
E-mail	annie.lo@wnc.com.tw
Tel/Mobile	886-3-666-7799 ext: 3415
Web address	https://www.wnc.com.tw
Address	20 Park Avenue II, Hsinchu Science Park Hsinchu 300, Taiwan

Antenna Sample / Antenna Data Requirements for worldwide regulatory approval

Section	Description of Required OEM / ODM Antenna Information	US / IC	EU	Japan	Taiwan	S.Korea
1A	Part Number for Antenna Assembly	Required	Required	Required	Required	Required
1B	Antenna Manufacturer Name	Required	Required	Required	Required	Required
1C	Description of Antenna Type	Required	N/A	N/A	N/A	N/A
1D	Tx antenna Gain(Peak Gain W/ cable loss) *	Required	Required	Required	Required	Required
2	Dimensioned Photographs and Drawings of Tx and Rx antennas	Required	Required	Required	Required	Required
3	Radiation patterns of antennas loaded in the host platform.	N/A	Required	Required	Required	N/A
4	Platform model name / number - correlated to antenna manufacturer and antenna part number	Required	Required	Desired	Required	Desired
5	Photograph(s) or Drawings showing location of antennas in platform. <u>(S. Korea requires photographs of antennas for approval submission). Taiwan requires pictures of each antenna type shown in the system.</u>	Required	Required	Desired	<u>Required (Photos)</u>	<u>Required (Photos)</u>
6	Mech. drawings / photos with dimensions of antenna locations and distance from end-user (For evaluation of SAR testing requirement).	Required	N/A	N/A	N/A	N/A
7	Photograph(s) or Drawings showing the location of all antennas (WLAN, other) and distance between those transmitting antennas. Information will be used to evaluate whether co-location testing is required.	Required	N/A	N/A	N/A	N/A
8	Local representative contact information for LMA/ PARS process.	Required	N/A	N/A	N/A	N/A

Antenna Information

Section 1. Antenna Assembly Specifications

Communication System	Band	Frequency(MHz) from low to high spectrum		1A Part Number for Antenna Assembly	1B Antenna Manufacturer Name	1C Description of Antenna Type	1D Tx Antenna Gain(dBi) Ant5
LTE Cat.M1	1	1920	1980	Main : 81ELBF15.G36	WNC	PIFA	-2.9
LTE Cat.M1	2	1850	1910				-4.44
LTE Cat.M1	3	1710	1785				-4.08
LTE Cat.M1	4	1710	1755				-4.64
GSM850 / LTE Cat.M1	5	824	849				-5.75
GSM900 / LTE Cat.M1	8	880	915				-4.05
LTE Cat.M1	12	699	716				-3.8
LTE Cat.M1	13	777	787				-6.49
LTE Cat.M1	14	788	798				-8.01
LTE Cat.M1	18	815	830				-7.57
LTE Cat.M1	19	830	845				-5.84
LTE Cat.M1	20	832	862				-5.71
GSM1900/ LTE Cat.M1	25	1850	1915				-4.44
LTE Cat.M1	26	814	849				-5.75
LTE Cat.M1	27	802	824				-7.36
LTE Cat.M1	28	703	748				-3.8
GSM1800 / LTE Cat.M1	66	1710	1780				-4.08
LTE Cat.M1	85	698	716	-3.8			


- Antenna Peak Gain required being test in system basis.

The listed frequency 2D radiation pattern is required

• Ant5:


Example:

710MHz

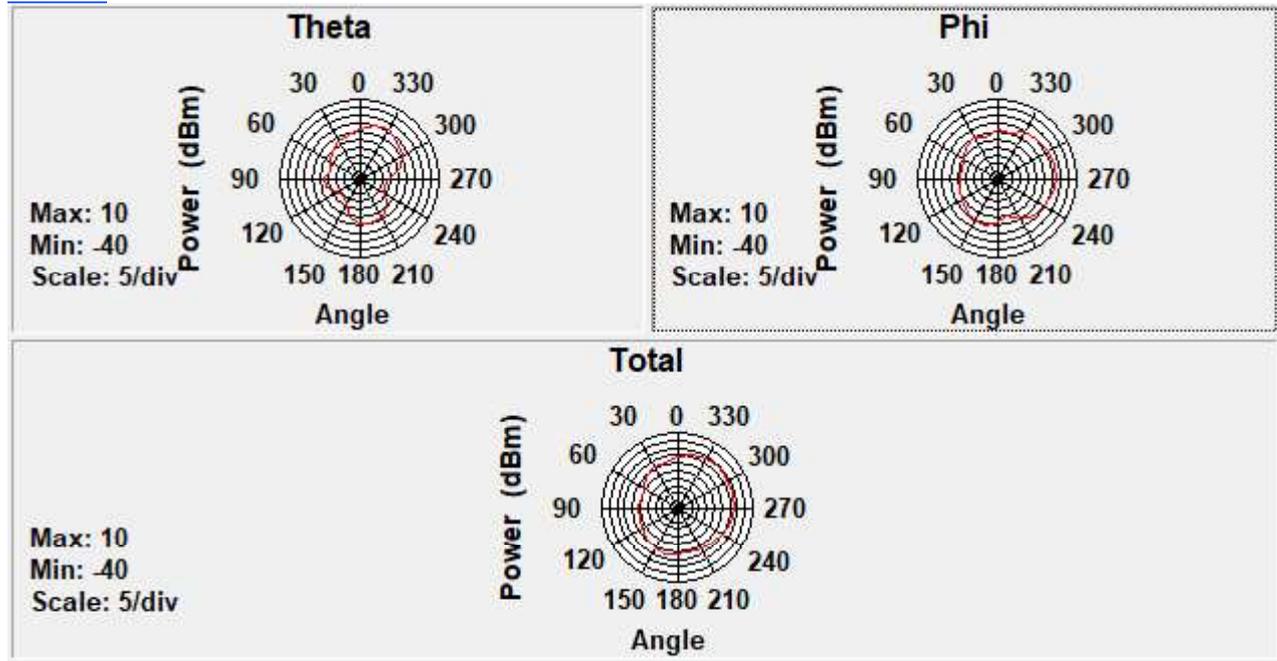


Center Frequency	710MHz
Horizontal (dBi) peak	-5.15
Vertical (dBi) peak	-3.8

777MHz

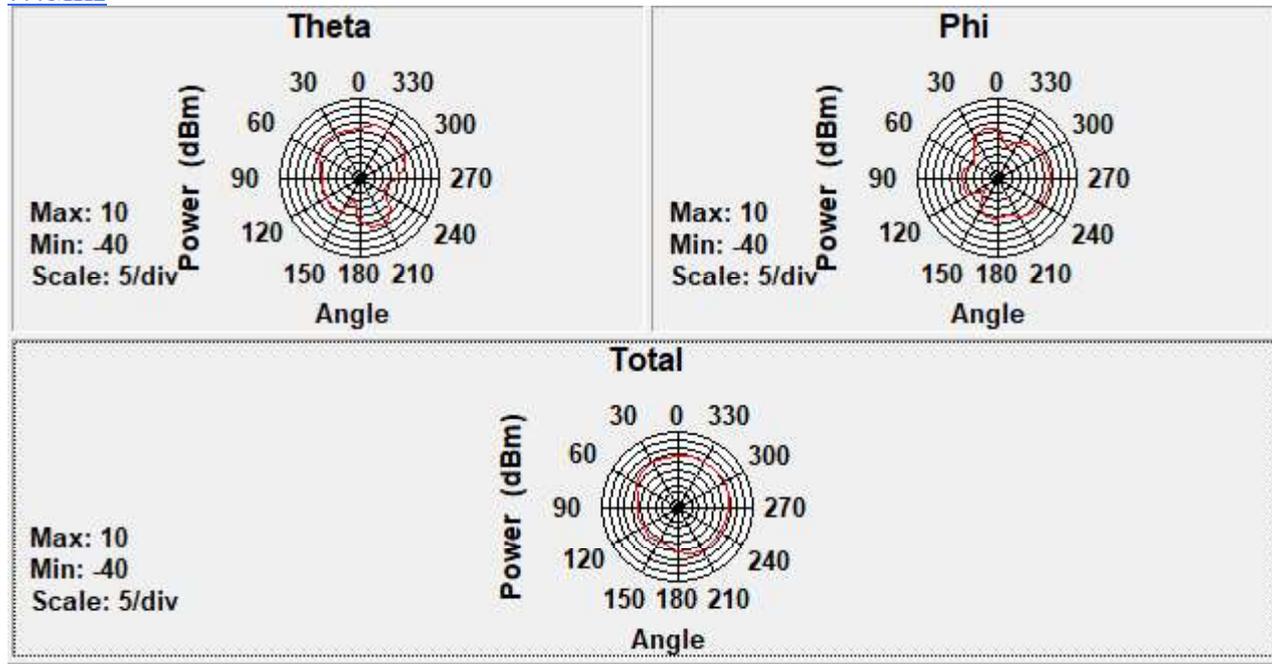


Center Frequency	777MHz
Horizontal (dBi) peak	-6.49
Vertical (dBi) peak	-7.06

791MHz

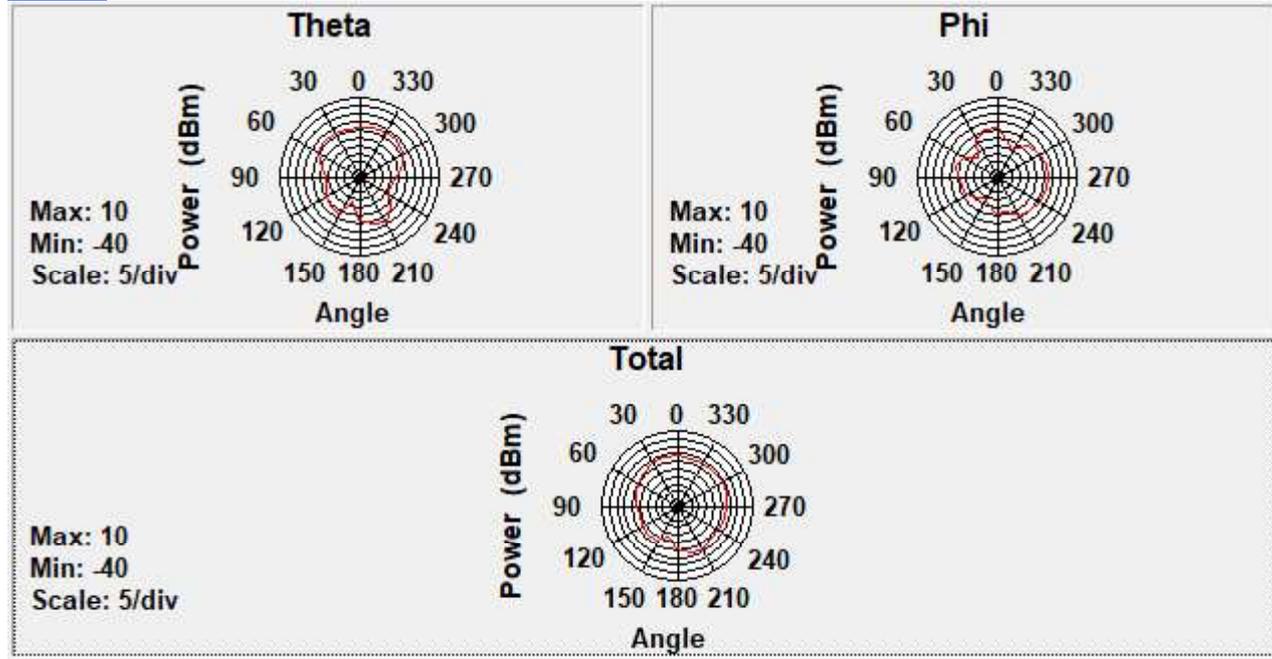


Center Frequency	791MHz
Horizontal (dBi) peak	-8.01
Vertical (dBi) peak	-8.34

814MHz

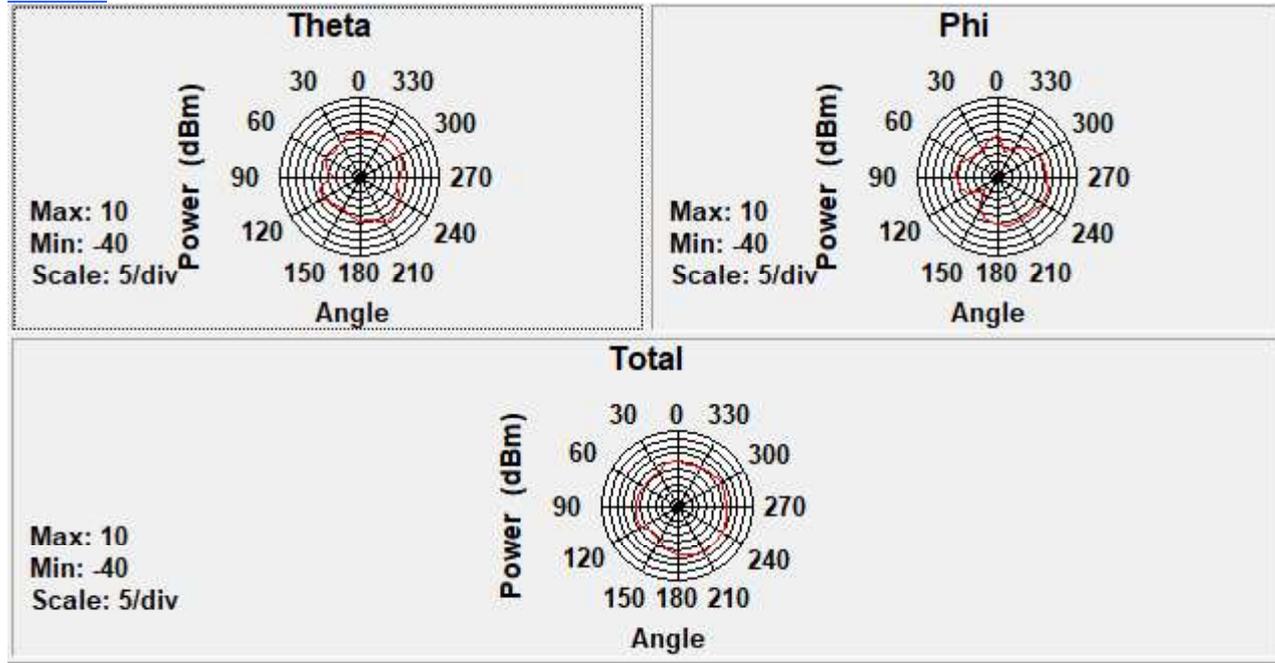


Center Frequency	814MHz
Horizontal (dBi) peak	-7.36
Vertical (dBi) peak	-7.92

821MHz

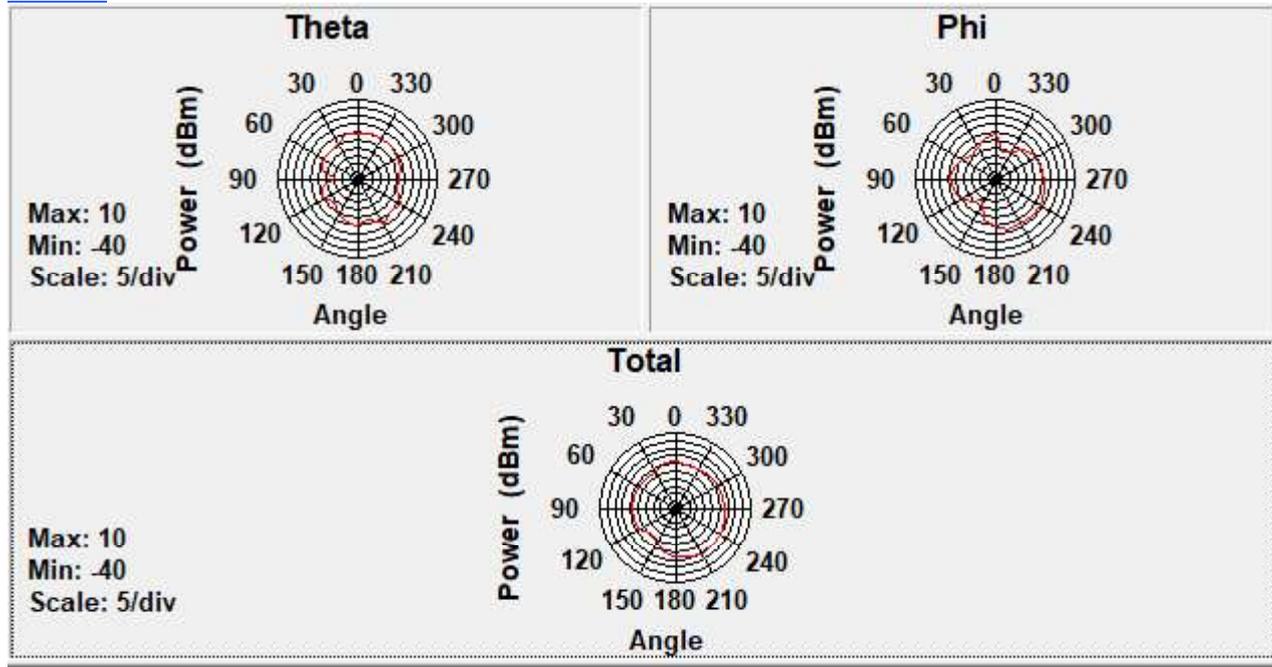


Center Frequency	821MHz
Horizontal (dBi) peak	-7.57
Vertical (dBi) peak	-8.05

845MHz

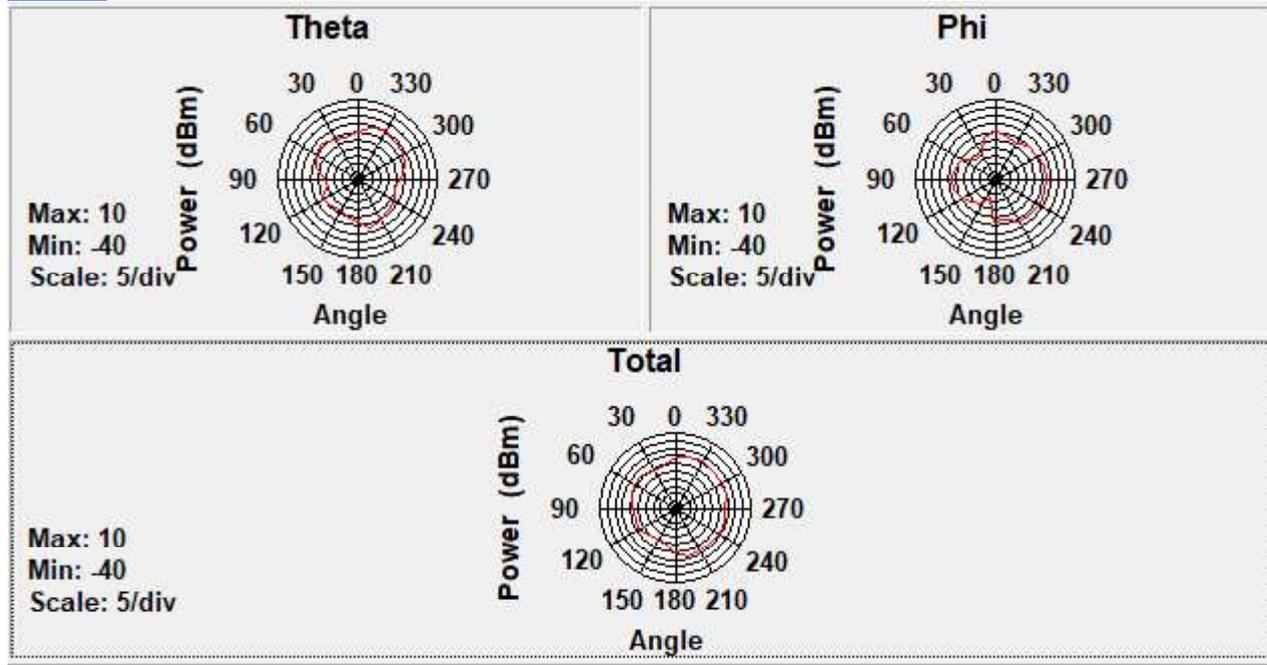


Center Frequency	845MHz
Horizontal (dBi) peak	-5.84
Vertical (dBi) peak	-8.31

849MHz

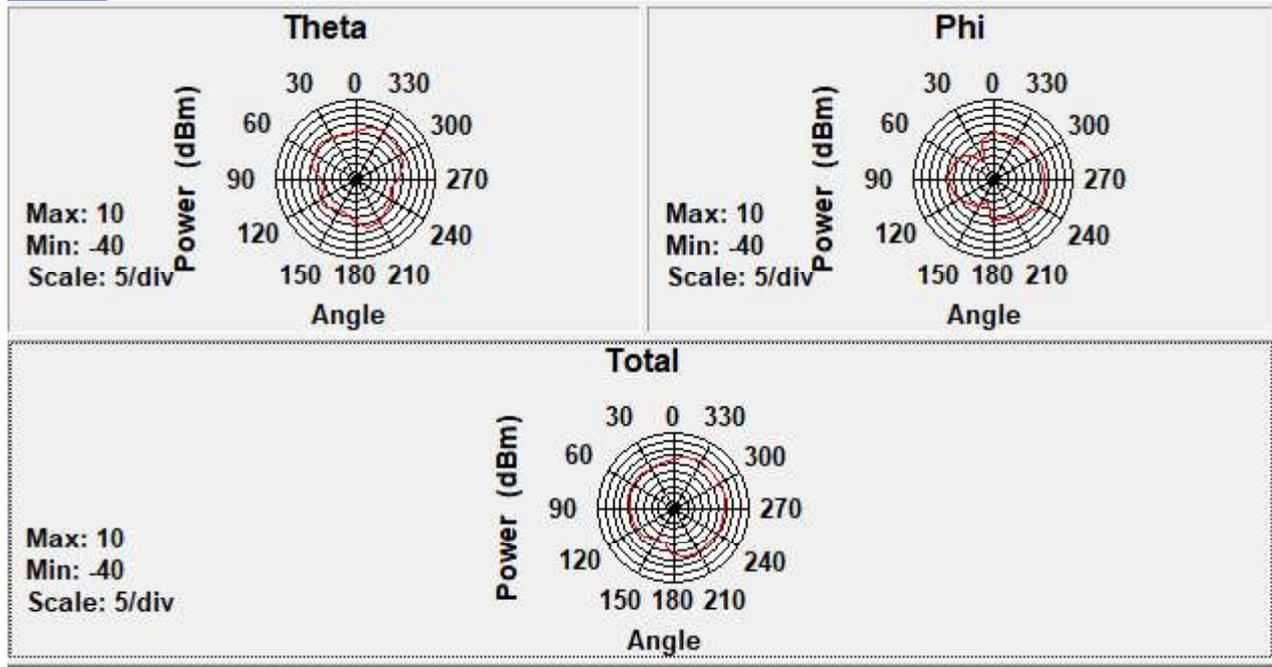


Center Frequency	849MHz
Horizontal (dBi) peak	-5.75
Vertical (dBi) peak	-7.86

859MHz

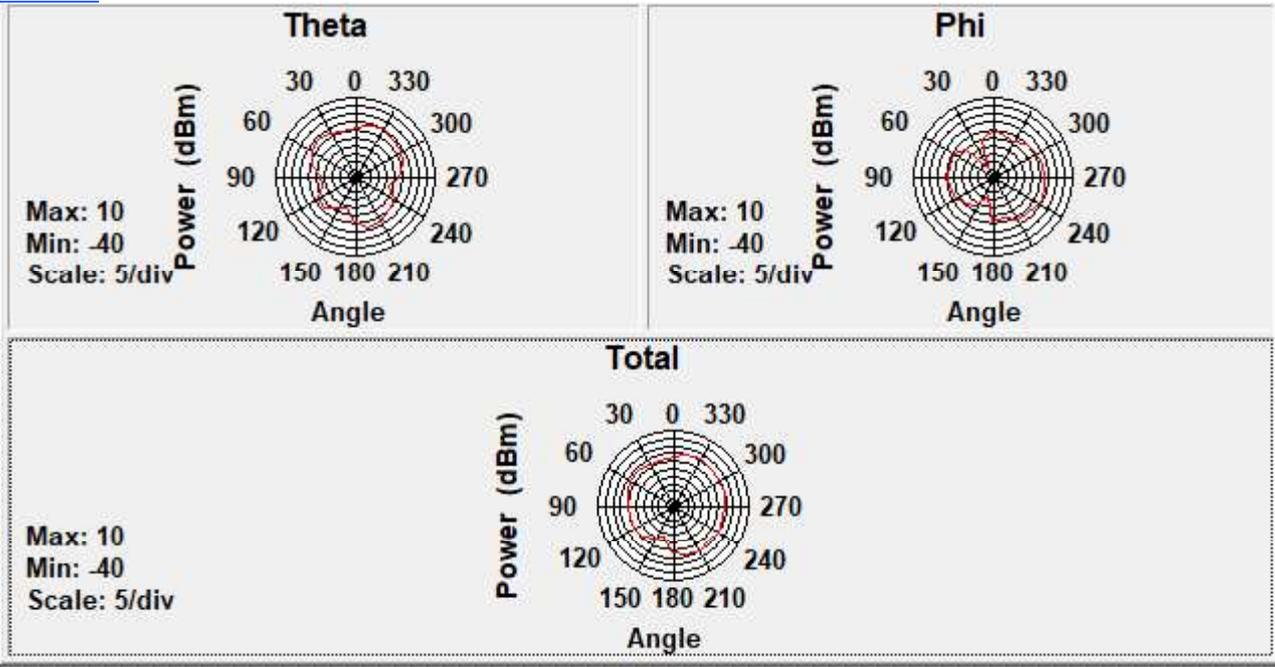


Center Frequency	859MHz
Horizontal (dBi) peak	-5.71
Vertical (dBi) peak	-7.37

915MHz

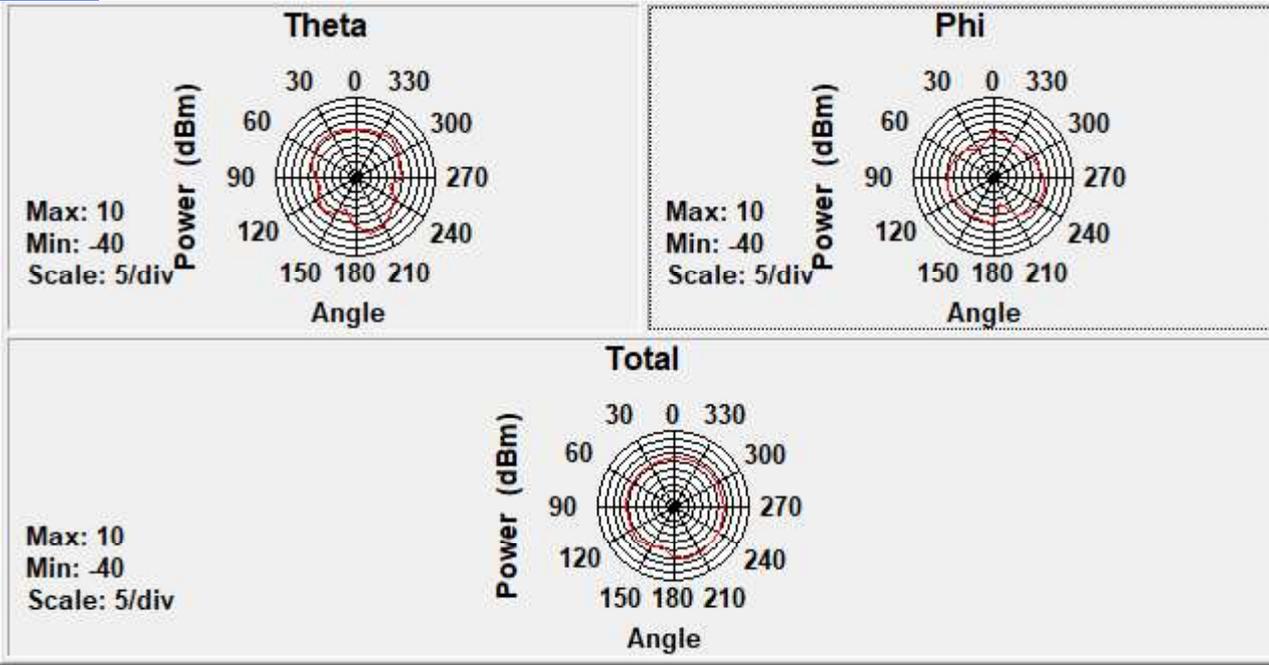


Center Frequency	915MHz
Horizontal (dBi) peak	-4.05
Vertical (dBi) peak	-7.73

1750MHz

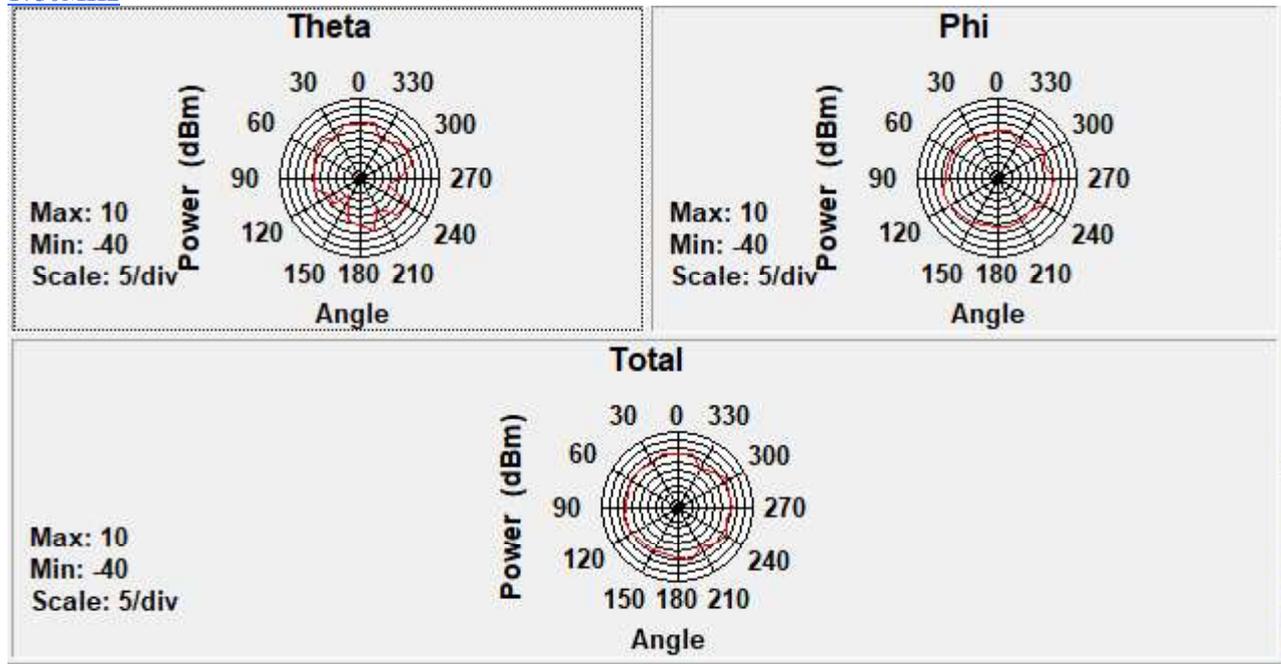


Center Frequency	1750MHz
Horizontal (dBi) peak	-4.64
Vertical (dBi) peak	-5.45

1780MHz

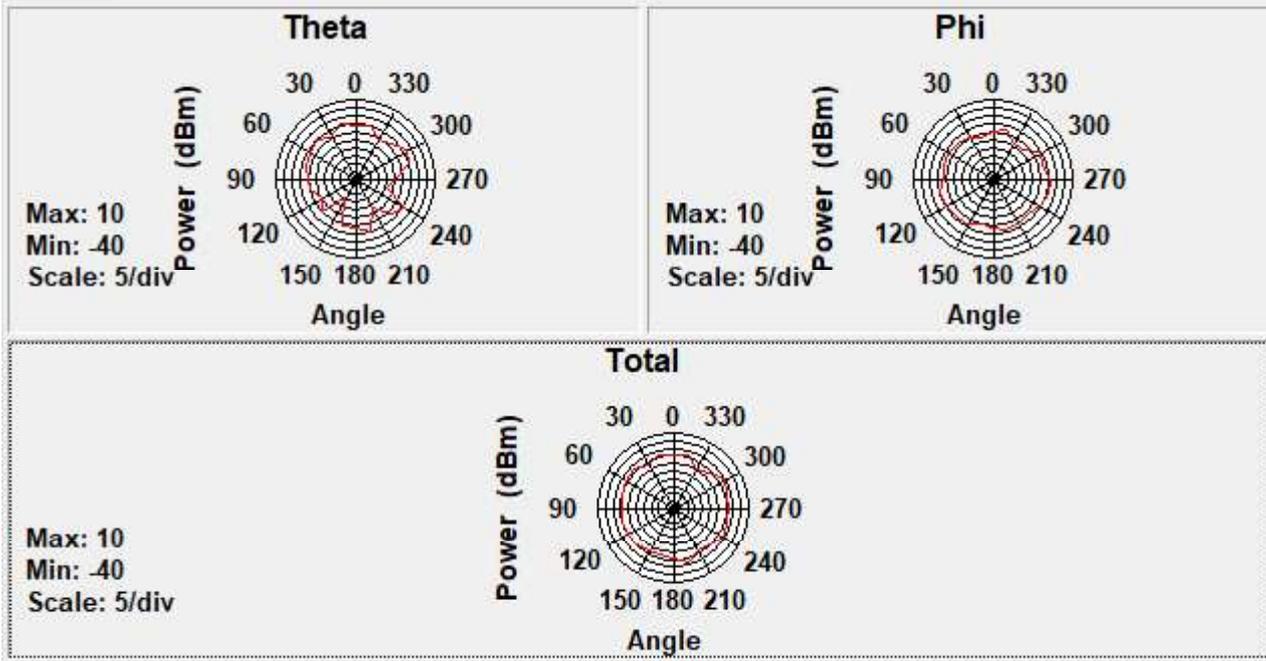


Center Frequency	1780MHz
Horizontal (dBi) peak	-4.08
Vertical (dBi) peak	-4.46

1880MHz

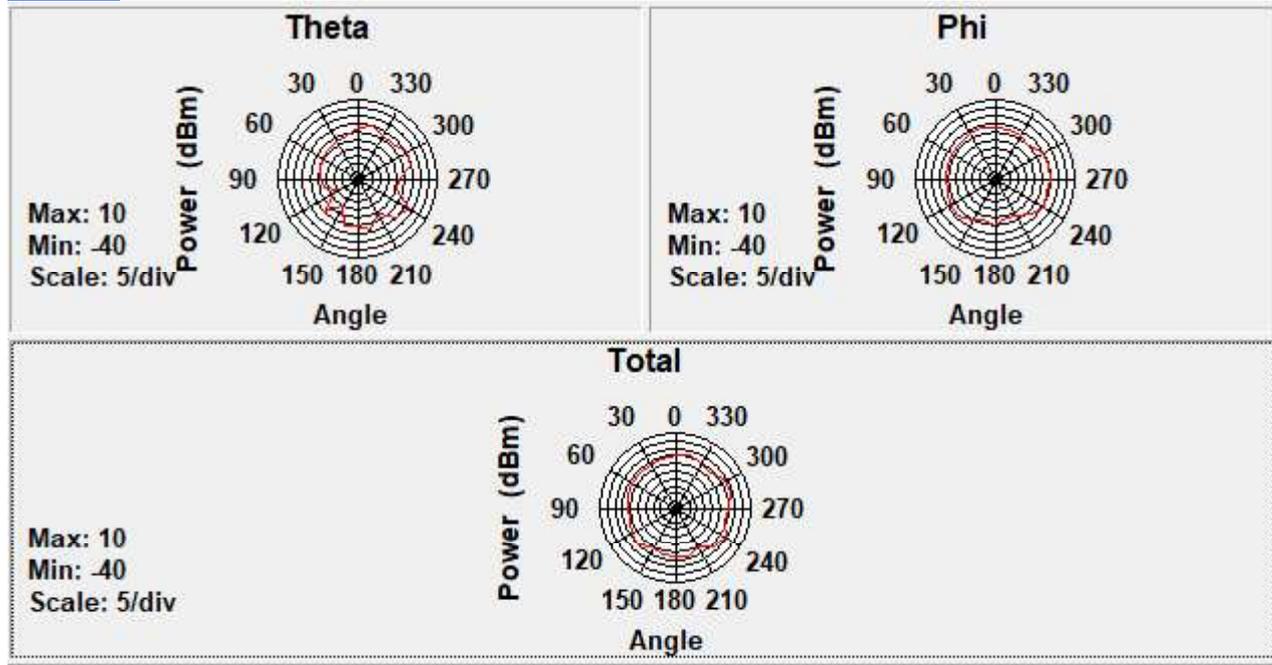

Center Frequency	1880MHz
Horizontal (dBi) peak	-4.44
Vertical (dBi) peak	-4.87

1980MHz

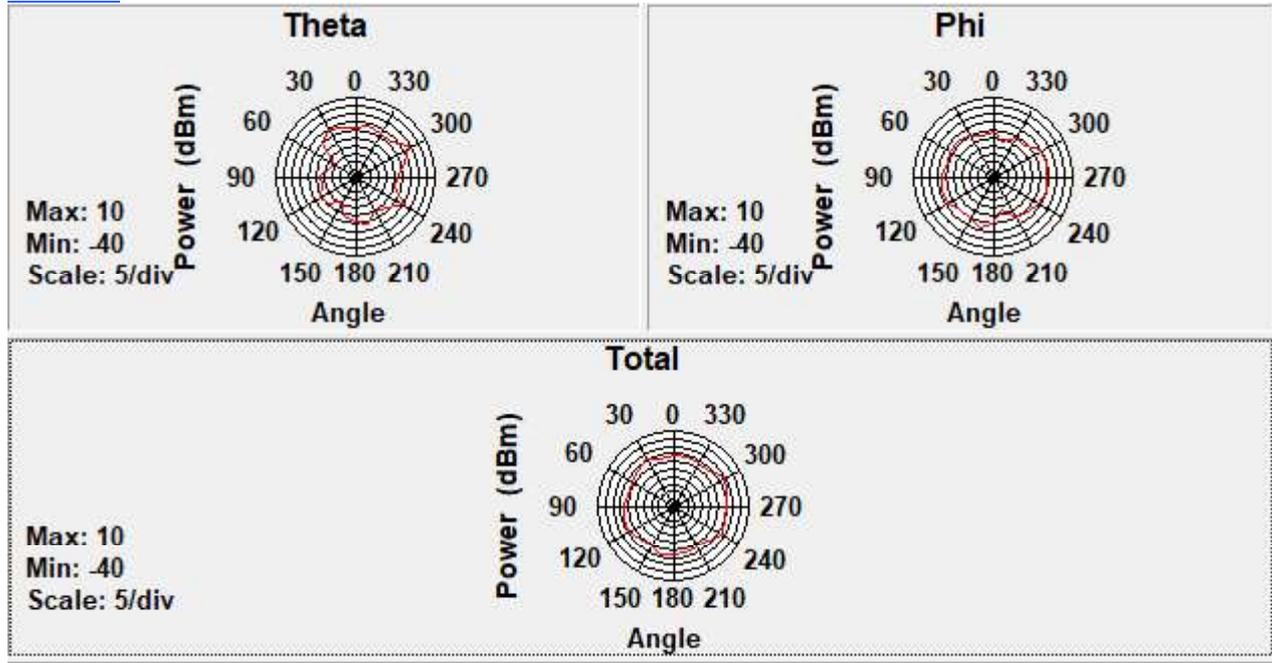

Center Frequency	1980MHz
Horizontal (dBi) peak	-2.9
Vertical (dBi) peak	-6.07