

FCC Test Report

(PART 27)

Report No.: RF180125C14-12

FCC ID: B94HNQ10CZV

Test Model: HSN-Q10C

Received Date: Feb. 05, 2018

Test Date: Mar. 29, 2018 ~ May 21, 2018

Issued Date: Jun. 01, 2018

Applicant: HP Inc.

Address: 3390 East Harmony Road, Fort Collins, Colorado 80528, United States

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C)

Test Location (1): No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil, Kwei Shan Dist., Taoyuan City 33383, Taiwan (R.O.C)

Test Location (2): No.215, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City 231, Taiwan, R.O.C

**FCC Registration /
Designation Number:** 427177 / TW0011



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Test Site and Instruments	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Configuration of System under Test	9
3.2.1 Description of Support Units	9
3.3 Test Mode Applicability and Tested Channel Detail	10
3.4 EUT Operating Conditions	12
3.5 General Description of Applied Standards	12
4 Test Types and Results	13
4.1 Output Power Measurement	13
4.1.1 Limits of Output Power Measurement	13
4.1.2 Test Procedures	13
4.1.3 Test Setup	14
4.1.4 Test Results	15
4.2 Frequency Stability Measurement	20
4.2.1 Limits of Frequency Stability Measurement	20
4.2.2 Test Procedure	20
4.2.3 Test Setup	20
4.2.4 Test Results	21
4.3 Occupied Bandwidth Measurement	29
4.3.1 Limits of Occupied Bandwidth Measurement	29
4.3.2 Test Procedure	29
4.3.3 Test Setup	29
4.3.4 Test Result	30
4.4 Out-of-Band Emissions Measurement	34
4.4.1 Limits of Out-of-Band Emissions Measurement	34
4.4.2 Test Setup	34
4.4.3 Test Procedures	34
4.4.4 Test Results	35
4.5 Peak to Average Ratio	51
4.5.1 Limits of Peak to Average Ratio Measurement	51
4.5.2 Test Setup	51
4.5.3 Test Procedures	51
4.5.4 Test Results	52
4.6 Conducted Spurious Emissions	56
4.6.1 Limits of Conducted Spurious Emissions Measurement	56
4.6.2 Test Setup	56
4.6.3 Test Procedure	56
4.6.4 Test Results	57
4.7 Radiated Emission Measurement	81
4.7.1 Limits of Radiated Emission Measurement	81
4.7.2 Test Procedure	81
4.7.3 Deviation from Test Standard	81
4.7.4 Test Setup	82
4.7.5 Test Results	83
5 Pictures of Test Arrangements	107
Appendix – Information on the Testing Laboratories	108

Release Control Record

Issue No.	Description	Date Issued
RF180125C14-12	Original Release	Jun. 01, 2018

1 Certificate of Conformity

Product: Notebook Computer
Brand: HP
Test Model: HSN-Q10C
Sample Status: Production Unit
Applicant: HP Inc.
Test Date: Mar. 29, 2018 ~ May 21, 2018
Standards: FCC Part 27, Subpart C, M

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Evonne Liu, **Date:** Jun. 01, 2018
Evonne Liu / Specialist

Approved by : Dylan Chiou, **Date:** Jun. 01, 2018
Dylan Chiou / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 27 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(h)	Equivalent Isotropic Radiated Power	Pass	Meet the requirement of limit.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Occupied Bandwidth	Pass	Meet the requirement of limit.
--	Peak to Average Ratio	Pass	Meet the requirement of limit.
2.1051 27.53(l)	Out-of-Band Emissions Measurements	Pass	Meet the requirement of limit.
2.1051 27.53(m)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(m)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -21.33 dB at 5070 MHz.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150 kHz ~ 30 MHz	2.44 dB
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.0153 dB
	200 MHz ~ 1000 MHz	2.0224 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	1.0121 dB
	18 GHz ~ 40 GHz	1.1508 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent Technologies	N9038A	MY52260177	Jul. 05, 2017	Jul. 04, 2018
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Jan. 11, 2018	Jan. 10, 2019
Double Ridge Guide Horn Antenna EMCO	3115	5619	Nov. 30, 2017	Nov. 29, 2018
HORN Antenna ETS	3117	00034128	Dec. 14, 2017	Dec. 13, 2018
BILOG Antenna SCHWARZBECK	VULB 9168	9168-153	Dec. 06, 2017	Dec. 05, 2018
Fixed Attenuator Mini-Circuits	BW-N10W5+	NA	Jul. 07, 2017	Jul. 06, 2018
Preamplifier Agilent	310N	187226	Jun. 23, 2017	Jun. 22, 2018
Preamplifier Agilent	83017A	MY39501357	Jun. 23, 2017	Jun. 22, 2018
RF signal cable ETS-LINDGREN	5D-FB	Cable-CH1-01(RF C-SMS-100-SMS- 120+RFC-SMS-1 00-SMS-400)	Jun. 23, 2017	Jun. 22, 2018
RF signal cable ETS-LINDGREN	8D-FB	Cable-CH1-02(RF C-SMS-100-SMS- 24)	Jun. 23, 2017	Jun. 22, 2018
Software BV ADT	E3 8.130425b	NA	NA	NA
Antenna Tower MF	NA	NA	NA	NA
Turn Table MF	NA	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Radio Communication Analyzer Anritsu	MT8820C	6201010284	Dec. 28, 2017	Dec. 27, 2018
Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 08, 2017	Sep. 07, 2018
DC Power Supply Topward	33010D	807748	Oct. 25, 2016	Oct. 24, 2018
Digital Multimeter Fluke	87-III	70360742	Jun. 30, 2017	Jun. 29, 2018

- Note: 1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HsinTien Chamber 1.
3. The horn antenna and preamplifier (model: 83017A) are used only for the measurement of emission frequency above 1 GHz if tested.
4. The IC Site Registration No. is IC7450I-1.

3 General Information

3.1 General Description of EUT

Product	Notebook Computer	
Brand	HP	
Test Model	HSN-Q10C	
Status of EUT	Production Unit	
Power Supply Rating	20 or 15 or 12 or 9 or 5 Vdc (Adapter)	
Modulation Type	QPSK, 16QAM	
Frequency Range	LTE Band 7 (Channel Bandwidth: 5 MHz)	2502.5 ~ 2567.5 MHz
	LTE Band 7 (Channel Bandwidth: 10 MHz)	2505 ~ 2565 MHz
	LTE Band 7 (Channel Bandwidth: 15 MHz)	2507.5 ~ 2562.5 MHz
	LTE Band 7 (Channel Bandwidth: 20 MHz)	2510 ~ 2560 MHz
	LTE Band 41 (Channel Bandwidth: 5 MHz)	2498.5 ~ 2687.5 MHz
	LTE Band 41 (Channel Bandwidth: 10 MHz)	2501.0 ~ 2685.0 MHz
	LTE Band 41 (Channel Bandwidth: 15 MHz)	2503.5 ~ 2682.5 MHz
	LTE Band 41 (Channel Bandwidth: 20 MHz)	2506.0 ~ 2680.0 MHz
Max. EIRP Power	LTE Band 7 (Channel Bandwidth: 5 MHz)	78.54 mW
	LTE Band 7 (Channel Bandwidth: 10 MHz)	63.55 mW
	LTE Band 7 (Channel Bandwidth: 15 MHz)	64.37 mW
	LTE Band 7 (Channel Bandwidth: 20 MHz)	64.82 mW
	LTE Band 41 (Channel Bandwidth: 5 MHz)	56.47 mW
	LTE Band 41 (Channel Bandwidth: 10 MHz)	56.64 mW
	LTE Band 41 (Channel Bandwidth: 15 MHz)	57.25 mW
	LTE Band 41 (Channel Bandwidth: 20 MHz)	58.08 mW
Emission Designator	LTE Band 7 (Channel Bandwidth: 5 MHz)	4M49W7D
	LTE Band 7 (Channel Bandwidth: 10 MHz)	8M98W7D
	LTE Band 7 (Channel Bandwidth: 15 MHz)	13M5G7D
	LTE Band 7 (Channel Bandwidth: 20 MHz)	18M0W7D
	LTE Band 41 (Channel Bandwidth: 5 MHz)	4M60G7D
	LTE Band 41 (Channel Bandwidth: 10 MHz)	8M97W7D
	LTE Band 41 (Channel Bandwidth: 15 MHz)	13M5G7D
	LTE Band 41 (Channel Bandwidth: 20 MHz)	17M9G7D
Antenna Type	Refer to Note as below	
Accessory Device	Refer to Note as below	
Data Cable Supplied	Refer to Note as below	

Note:

1. The WWAN module (Brand: FOXCONN, Model: T77W676) was installed in the EUT.
2. The EUT contains following accessory devices.

Product	Brand	Model	Description
Adapter	hp	TPN-LA12	I/P: 100-240 Vac, 50-60 Hz, 1.6 A O/P: 20 Vdc, 3.25 A, 15 Vdc, 4.33 A, 12 Vdc, 5 A, 9 Vdc, 3 A, 5 Vdc, 3 A

3. The antenna information is listed as below.


Ant. Type	Manuf.	Parts Number	Antenna Gain							
			LTE 2 / LTE 25 / WCDMA Band II	LTE 4 / LTE 66 / WCDMA Band IV	LTE 5 / LTE 26 / WCDMA Band V	LTE 7	LTE 12 / LTE 17	LTE 13	LTE 30	LTE 41
PIFA	INPAQ	Main Ant.: DQ6LB020017 (WA-P-LTE8LTE12LBLB-02-001) Aux Ant.: DQ6LB020017 (WA-P-LTE8LTE12LBLB-02-001)	-6.19	-5.79	-5.86	-4.9	-5.21	-4.32	-3.68	-4.9

Antenna Type	Vendor	Part Number	Antenna Gain (dBi)			
			Laptop PC Mode			
			WLAN 2.4GHz	WLAN 5.2GHz	WLAN 5.5GHz	WLAN 5.8GHz
PIFA	INPAQ	WLAN Main Antenna: DQ6LB020509 (WA-P-LBLB-02-059) WLAN Aux Antenna: DQ6LB020509 (WA-P-LBLB-02-059)	1.66	0.54	0.56	-0.21
			Tablet PC Mode			
			WLAN 2.4GHz	WLAN 5.2GHz	WLAN 5.5GHz	WLAN 5.8GHz
			-0.36	3.36	2.21	3.08


4. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

<Radiated Emission Test>

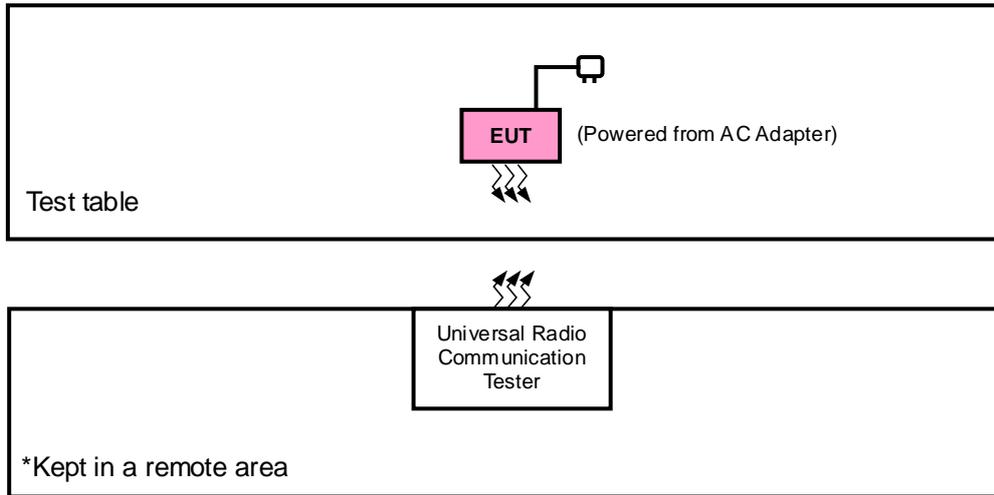

<E.I.R.P. Test>

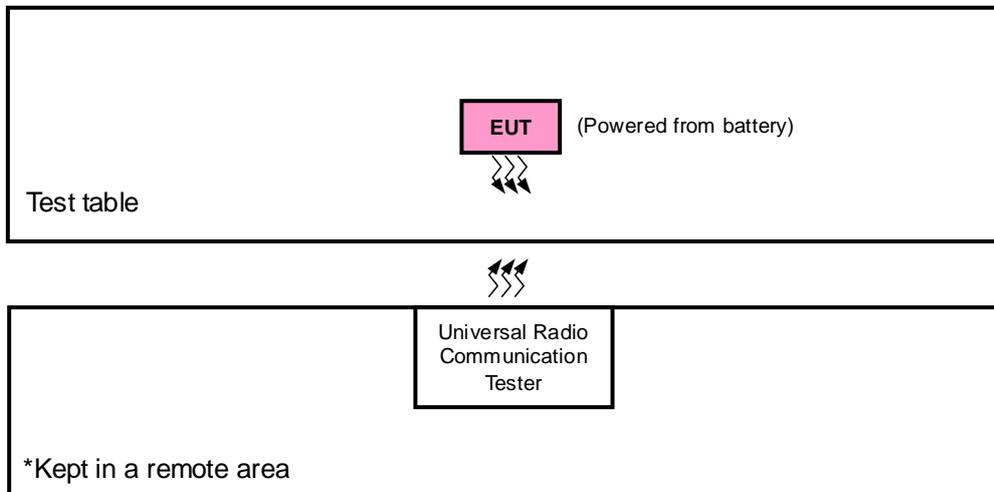

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	EIRP	Radiated Emission
LTE Band 7	X-plane	X-axis
LTE Band 41	X-plane	X-axis

LTE Band 7

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK, 16QAM	1 RB / 12 RB Offset
		20800 to 21400	20800, 21100, 21400	10 MHz	QPSK, 16QAM	1 RB / 24 RB Offset
		20825 to 21375	20825, 21100, 21375	15 MHz	QPSK, 16QAM	1 RB / 37 RB Offset
		20850 to 21350	20850, 21100 21350	20 MHz	QPSK, 16QAM	1 RB / 50 RB Offset
-	Frequency Stability	20775 to 21425	20775, 21425	5 MHz	QPSK	1 RB / 12 RB Offset
		20800 to 21400	20800, 21400	10 MHz	QPSK	1 RB / 24 RB Offset
		20825 to 21375	20825, 21375	15 MHz	QPSK	1 RB / 37 RB Offset
		20850 to 21350	20850, 21350	20 MHz	QPSK	1 RB / 50 RB Offset
-	Occupied Bandwidth	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		20800 to 21400	20800, 21100, 21400	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		20825 to 21375	20825, 21100, 21375	15 MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		20850 to 21350	20850, 21100 21350	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	Peak to Average Ratio	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK, 16QAM	1 RB / 12 RB Offset
		20800 to 21400	20800, 21100, 21400	10 MHz	QPSK, 16QAM	1 RB / 24 RB Offset
		20825 to 21375	20825, 21100, 21375	15 MHz	QPSK, 16QAM	1 RB / 37 RB Offset
		20850 to 21350	20850, 21100 21350	20 MHz	QPSK, 16QAM	1 RB / 50 RB Offset
-	Out-of-Band Emissions	20775 to 21425	20775, 21425	5 MHz	QPSK, 16QAM	1 RB / 12 RB Offset
		20800 to 21400	20800, 21400	10 MHz	QPSK, 16QAM	1 RB / 24 RB Offset
		20825 to 21375	20825, 21375	15 MHz	QPSK, 16QAM	1 RB / 37 RB Offset
		20850 to 21350	20850, 21350	20 MHz	QPSK, 16QAM	1 RB / 50 RB Offset
-	Conducted Emission	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK	1 RB / 12 RB Offset
		20800 to 21400	20800, 21100, 21400	10 MHz	QPSK	1 RB / 24 RB Offset
		20825 to 21375	20825, 21100, 21375	15 MHz	QPSK	1 RB / 37 RB Offset
		20850 to 21350	20850, 21100 21350	20 MHz	QPSK	1 RB / 50 RB Offset
-	Radiated Emission	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK	1 RB / 12 RB Offset
		20850 to 21350	20850, 21100 21350	20 MHz	QPSK	1 RB / 50 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE Band 41

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	39675 to 41565	39675, 40620, 41565	5 MHz	QPSK, 16QAM	1 RB / 12 RB Offset
		39700 to 41540	39700, 40620, 41540	10 MHz	QPSK, 16QAM	1 RB / 24 RB Offset
		39725 to 41515	39725, 40620, 41515	15 MHz	QPSK, 16QAM	1 RB / 37 RB Offset
		39750 to 41490	39750, 40620, 41490	20 MHz	QPSK, 16QAM	1 RB / 50 RB Offset
-	Frequency Stability	39675 to 41565	39675, 41565	5 MHz	QPSK	1 RB / 12 RB Offset
		39700 to 41540	39700, 41540	10 MHz	QPSK	1 RB / 24 RB Offset
		39725 to 41515	39725, 41515	15 MHz	QPSK	1 RB / 37 RB Offset
		39750 to 41490	39750, 41490	20 MHz	QPSK	1 RB / 50 RB Offset
-	Occupied Bandwidth	39675 to 41565	39675, 40620, 41565	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		39700 to 41540	39700, 40620, 41540	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		39725 to 41515	39725, 40620, 41515	15 MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		39750 to 41490	39750, 40620, 41490	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	Peak to Average Ratio	39675 to 41565	39675, 40620, 41565	5 MHz	QPSK, 16QAM	1 RB / 12 RB Offset
		39700 to 41540	39700, 40620, 41540	10 MHz	QPSK, 16QAM	1 RB / 24 RB Offset
		39725 to 41515	39725, 40620, 41515	15 MHz	QPSK, 16QAM	1 RB / 37 RB Offset
		39750 to 41490	39750, 40620, 41490	20 MHz	QPSK, 16QAM	1 RB / 50 RB Offset
-	Out-of-Band Emissions	39675 to 41565	39675, 41565	5 MHz	QPSK, 16QAM	1 RB / 12 RB Offset
		39700 to 41540	39700, 41540	10 MHz	QPSK, 16QAM	1 RB / 24 RB Offset
		39725 to 41515	39725, 41515	15 MHz	QPSK, 16QAM	1 RB / 37 RB Offset
		39750 to 41490	39750, 41490	20 MHz	QPSK, 16QAM	1 RB / 50 RB Offset
-	Conducted Emission	39675 to 41565	39675, 40620, 41565	5 MHz	QPSK	1 RB / 12 RB Offset
		39700 to 41540	39700, 40620, 41540	10 MHz	QPSK	1 RB / 24 RB Offset
		39725 to 41515	39725, 40620, 41515	15 MHz	QPSK	1 RB / 37 RB Offset
		39750 to 41490	39750, 40620, 41490	20 MHz	QPSK	1 RB / 50 RB Offset
-	Radiated Emission	39675 to 41565	39675, 40620, 41565	5 MHz	QPSK	1 RB / 12 RB Offset
		39750 to 41490	39750, 40620, 41490	20 MHz	QPSK	1 RB / 50 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
EIRP	25 deg. C, 65 % RH	6.54 Vdc	Karl Lee
Frequency Stability	25 deg. C, 65 % RH	6.54 Vdc	Wayne Lin
Occupied Bandwidth	25 deg. C, 65 % RH	6.54 Vdc	Wayne Lin
Out-of-Band Emissions	25 deg. C, 65 % RH	6.54 Vdc	Wayne Lin
Peak to Average Ratio	25 deg. C, 65 % RH	6.54 Vdc	Wayne Lin
Conducted Emission	25 deg. C, 65 % RH	6.54 Vdc	Wayne Lin
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Karl Lee

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

KDB 971168 D01 Power Meas License Digital Systems v02r02

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

Note: All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

The radiated peak output power shall be according to the specific rule Part 27.50(h)(2) that “User stations are limited to 2 watts” and 27.50(i) specific that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.”

4.1.2 Test Procedures

EIRP Measurement:


- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 10 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value“ of step b. Record the power level of S.G.
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$

Conducted Power Measurement:


- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

4.1.3 Test Setup

**EIRP / ERP Measurement:
<Radiated Emission below or equal 1 GHz>**

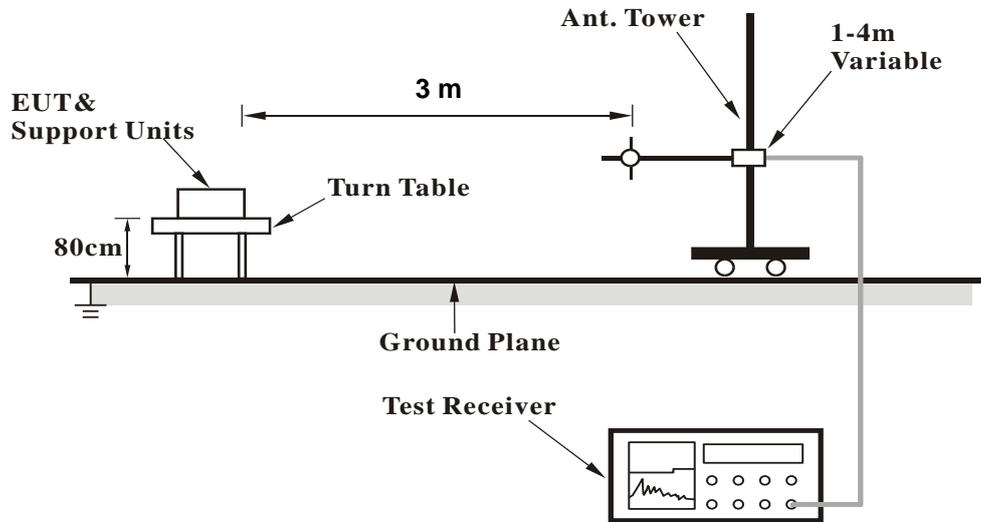

<Radiated Emission above 1 GHz>

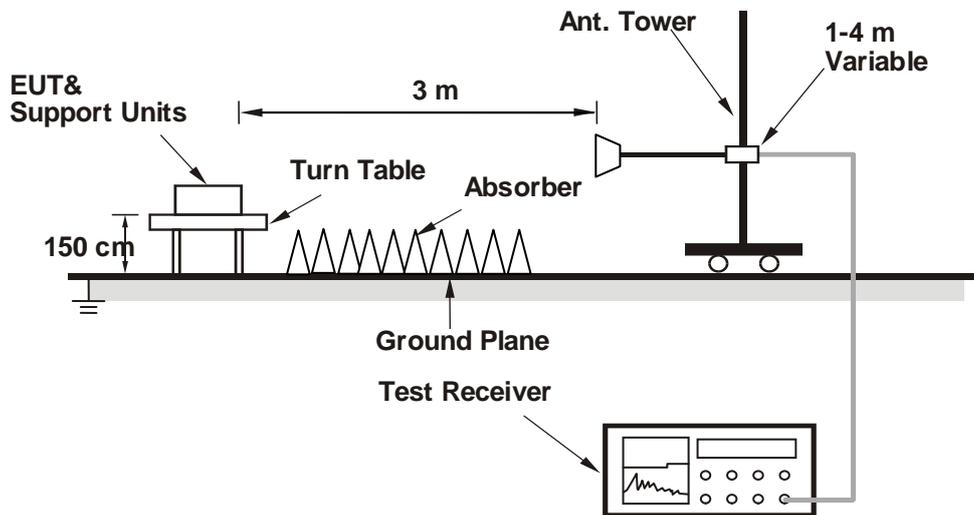

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:



4.1.4 Test Results

LTE Band 7																
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	
		Channel		20850	21100	21350				Channel		20825	21100	21375		
		Frequency (MHz)		2510.0	2535.0	2560.0				Frequency (MHz)		2507.5	2535.0	2562.5		
20M	QPSK	1	0	23.12	23.18	23.56	0	15M	QPSK	1	0	23.07	23.12	23.50	0	
		1	50	23.11	23.17	23.55	0			1	37	23.10	23.15	23.54	0	
		1	99	23.45	23.51	23.89	0			1	74	23.37	23.44	23.86	0	
		50	0	22.09	22.15	22.53	1			36	0	22.02	22.06	22.49	1	
		50	25	22.22	22.28	22.66	1			36	19	22.17	22.28	22.62	1	
		50	50	22.33	22.39	22.77	1			36	39	22.30	22.39	22.73	1	
	100	0	22.27	22.33	22.71	1	75		0	22.17	22.26	22.61	1			
	16QAM	1	0	22.05	22.18	22.53	1		16QAM	1	0	22.01	22.08	22.46	1	
		1	50	22.06	22.12	22.50	1			1	37	22.07	22.07	22.42	1	
		1	99	22.39	22.44	22.85	1			1	74	22.34	22.37	22.83	1	
		50	0	21.05	21.12	21.53	2			36	0	21.01	21.05	21.44	2	
		50	25	21.15	21.27	21.63	2			36	19	21.13	21.12	21.64	2	
		50	50	21.29	21.38	21.68	2			36	39	21.28	21.28	21.71	2	
		100	0	21.20	21.25	21.63	2			75	0	21.14	21.21	21.65	2	

LTE Band 41																			
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	High	3GPP MPR (dB)	
		Channel		39750	40185	40620	41055	41490				Channel		39725	40173	40620	41068		41515
		Frequency (MHz)		2506.0	2549.5	2593.0	2636.5	2680.0				Frequency (MHz)		2503.5	2548.3	2593.0	2637.8		2682.5
20M	QPSK	1	0	23.08	23.05	23.37	24.07	23.93	0	15M	QPSK	1	0	23.06	23.01	23.34	24.05	23.83	0
		1	50	23.36	23.33	23.65	24.35	24.21	0			1	37	23.30	23.29	23.55	24.32	24.15	0
		1	99	23.66	23.63	23.95	24.65	24.51	0			1	74	23.63	23.55	23.88	24.65	24.46	0
		50	0	22.29	22.26	22.58	23.28	23.14	1			36	0	22.19	22.25	22.50	23.21	23.04	1
		50	25	22.45	22.42	22.74	23.44	23.30	1			36	19	22.44	22.33	22.66	23.35	23.23	1
		50	50	22.56	22.53	22.85	23.55	23.41	1			36	39	22.53	22.43	22.78	23.52	23.41	1
	100	0	22.41	22.38	22.70	23.40	23.26	1	75		0	22.41	22.31	22.66	23.36	23.22	1		
	16QAM	1	0	22.08	22.01	22.29	23.05	22.89	1		16QAM	1	0	22.07	22.02	22.28	23.05	22.84	1
		1	50	22.29	22.23	22.58	23.28	23.16	1			1	37	22.35	22.33	22.59	23.31	23.17	1
		1	99	22.62	22.55	22.91	23.57	23.43	1			1	74	22.60	22.53	22.92	23.61	23.45	1
		50	0	21.29	21.18	21.53	22.22	22.09	2			36	0	21.23	21.18	21.51	22.21	22.09	2
		50	25	21.39	21.40	21.74	22.38	22.27	2			36	19	21.44	21.33	21.72	22.44	22.21	2
		50	50	21.52	21.46	21.80	22.55	22.34	2			36	39	21.50	21.45	21.85	22.53	22.39	2
		100	0	21.33	21.35	21.68	22.37	22.24	2			75	0	21.33	21.35	21.63	22.36	22.26	2

EIRP Power (dBm)

LTE Band 7							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	20775	2502.5	-26.22	44.24	18.02	63.36	H
	21100	2535.0	-26.18	44.20	18.02	63.34	
	21425	2567.5	-25.85	44.80	18.95	78.54	
	20775	2502.5	-29.20	44.19	14.99	31.56	V
	21100	2535.0	-29.10	44.09	14.99	31.54	
	21425	2567.5	-29.55	44.50	14.95	31.25	
Channel Bandwidth: 5 MHz / 16QAM							
X	20775	2502.5	-27.24	44.24	17.00	50.10	H
	21100	2535.0	-27.23	44.20	16.97	49.74	
	21425	2567.5	-26.85	44.80	17.95	62.39	
	20775	2502.5	-30.21	44.19	13.98	25.01	V
	21100	2535.0	-30.14	44.09	13.95	24.82	
	21425	2567.5	-30.53	44.50	13.97	24.94	

LTE Band 7							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	20800	2505.0	-26.31	44.34	18.03	63.55	H
	21100	2535.0	-26.17	44.20	18.03	63.49	
	21400	2565.0	-26.75	44.72	17.97	62.70	
	20800	2505.0	-29.17	44.23	15.06	32.03	V
	21100	2535.0	-29.05	44.09	15.04	31.90	
	21400	2565.0	-29.37	44.41	15.04	31.89	
Channel Bandwidth: 10 MHz / 16QAM							
X	20800	2505.0	-27.33	44.34	17.01	50.25	H
	21100	2535.0	-27.20	44.20	17.00	50.08	
	21400	2565.0	-27.71	44.72	17.01	50.27	
	20800	2505.0	-30.15	44.23	14.08	25.56	V
	21100	2535.0	-30.08	44.09	14.01	25.17	
	21400	2565.0	-30.40	44.41	14.01	25.15	

LTE Band 7							
Channel Bandwidth: 15 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	20825	2507.5	-26.30	44.32	18.02	63.36	H
	21100	2535.0	-26.11	44.20	18.09	64.37	
	21375	2562.5	-26.84	44.85	18.01	63.21	
	20825	2507.5	-28.93	43.99	15.06	32.08	V
	21100	2535.0	-29.05	44.09	15.04	31.90	
	21375	2562.5	-29.50	44.51	15.01	31.70	
Channel Bandwidth: 15 MHz / 16QAM							
X	20825	2507.5	-27.26	44.32	17.06	50.79	H
	21100	2535.0	-27.15	44.20	17.05	50.66	
	21375	2562.5	-27.81	44.85	17.04	50.56	
	20825	2507.5	-29.91	43.99	14.08	25.60	V
	21100	2535.0	-30.03	44.09	14.06	25.46	
	21375	2562.5	-30.47	44.51	14.04	25.35	

LTE Band 7							
Channel Bandwidth: 20 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	20850.0	2510.0	-26.03	44.16	18.13	65.01	H
	21100.0	2535.0	-26.08	44.20	18.12	64.82	
	21350.0	2560.0	-26.75	44.81	18.06	63.93	
	20850.0	2510.0	-29.66	44.78	15.12	32.51	V
	21100.0	2535.0	-28.99	44.09	15.10	32.34	
	21350.0	2560.0	-29.61	44.72	15.11	32.43	
Channel Bandwidth: 20 MHz / 16QAM							
X	20850.0	2510.0	-27.01	44.16	17.15	51.88	H
	21100.0	2535.0	-27.08	44.20	17.12	51.49	
	21350.0	2560.0	-27.73	44.81	17.08	51.02	
	20850.0	2510.0	-30.63	44.78	14.15	26.00	V
	21100.0	2535.0	-29.98	44.09	14.11	25.75	
	21350.0	2560.0	-30.65	44.72	14.07	25.53	

LTE Band 41							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	39675	2498.5	-26.72	44.24	17.52	56.47	H
	40620	2593.0	-26.73	44.20	17.47	55.81	
	41565	2687.5	-27.32	44.80	17.48	55.99	
	39675	2498.5	-29.65	44.19	14.54	28.45	V
	40620	2593.0	-29.58	44.09	14.51	28.24	
	41565	2687.5	-30.04	44.50	14.46	27.92	
Channel Bandwidth: 5 MHz / 16QAM							
X	39675	2498.5	-27.74	44.24	16.50	44.65	H
	40620	2593.0	-27.75	44.20	16.45	44.13	
	41565	2687.5	-28.31	44.80	16.49	44.58	
	39675	2498.5	-30.66	44.19	13.53	22.55	V
	40620	2593.0	-30.58	44.09	13.51	22.43	
	41565	2687.5	-31.06	44.50	13.44	22.07	

LTE Band 41							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	39700	2501.0	-26.81	44.34	17.53	56.64	H
	40620	2593.0	-26.71	44.20	17.49	56.07	
	41540	2685.0	-27.22	44.72	17.50	56.27	
	39700	2501.0	-29.68	44.23	14.55	28.48	V
	40620	2593.0	-29.54	44.09	14.55	28.50	
	41540	2685.0	-29.93	44.41	14.48	28.03	
Channel Bandwidth: 10 MHz / 16QAM							
X	39700	2501.0	-27.76	44.34	16.58	45.51	H
	40620	2593.0	-27.64	44.20	16.56	45.26	
	41540	2685.0	-28.16	44.72	16.56	45.32	
	39700	2501.0	-30.69	44.23	13.54	22.57	V
	40620	2593.0	-30.60	44.09	13.49	22.33	
	41540	2685.0	-30.91	44.41	13.50	22.37	

LTE Band 41							
Channel Bandwidth: 15 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	39725	2503.5	-26.74	44.32	17.58	57.25	H
	40620	2593.0	-26.65	44.20	17.55	56.85	
	41515	2682.5	-27.30	44.85	17.55	56.86	
	39725	2503.5	-29.42	43.99	14.57	28.65	V
	40620	2593.0	-29.50	44.09	14.59	28.76	
	41515	2682.5	-29.96	44.51	14.55	28.51	
Channel Bandwidth: 15 MHz / 16QAM							
X	39725	2503.5	-27.72	44.32	16.60	45.69	H
	40620	2593.0	-27.66	44.20	16.54	45.05	
	41515	2682.5	-28.32	44.85	16.53	44.96	
	39725	2503.5	-30.42	43.99	13.57	22.76	V
	40620	2593.0	-30.54	44.09	13.55	22.64	
	41515	2682.5	-30.98	44.51	13.53	22.54	

LTE Band 41							
Channel Bandwidth: 20 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	39750	2506.0	-26.52	44.16	17.64	58.08	H
	40620	2593.0	-26.60	44.20	17.60	57.50	
	41490	2680.0	-27.22	44.81	17.59	57.37	
	39750	2506.0	-30.11	44.78	14.67	29.31	V
	40620	2593.0	-29.45	44.09	14.64	29.09	
	41490	2680.0	-30.11	44.72	14.61	28.91	
Channel Bandwidth: 20 MHz / 16QAM							
X	39750	2506.0	-27.53	44.16	16.63	46.03	H
	40620	2593.0	-27.55	44.20	16.65	46.21	
	41490	2680.0	-28.21	44.81	16.60	45.68	
	39750	2506.0	-31.15	44.78	13.63	23.07	V
	40620	2593.0	-30.45	44.09	13.64	23.11	
	41490	2680.0	-31.11	44.72	13.61	22.96	

4.2 Frequency Stability Measurement

4.2.1 Limits of Frequency Stability Measurement


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

4.2.2 Test Procedure

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the ± 0.5 °C during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.2.3 Test Setup

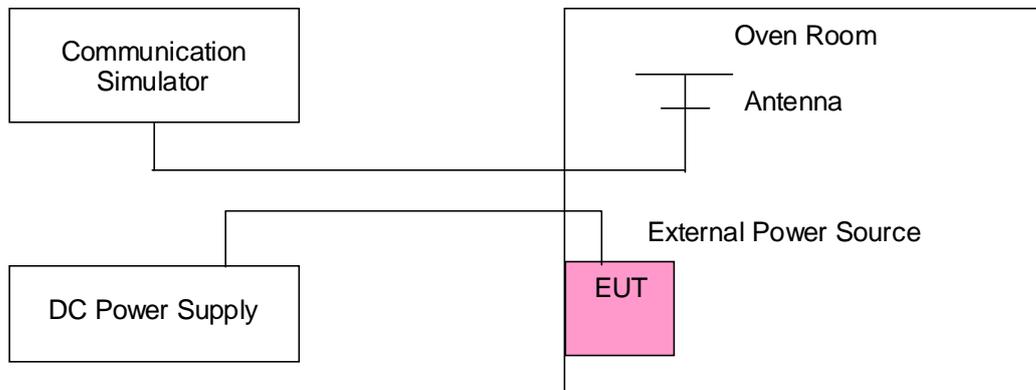

4.2.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 7				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
7.7	2502.500003	0.001	2567.500003	0.001	2.5
6.54	2502.500004	0.001	2567.500001	0.000	2.5
8.85	2502.500003	0.001	2567.500003	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 6.54 Vdc to 8.85 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 7				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2502.500001	0.001	2567.500001	0.001	2.5
-20	2502.500002	0.001	2567.500002	0.001	2.5
-10	2502.500002	0.001	2567.500004	0.002	2.5
0	2502.500004	0.001	2567.500001	0.000	2.5
10	2502.500003	0.001	2567.500003	0.001	2.5
20	2502.499997	-0.001	2567.499998	-0.001	2.5
30	2502.499996	-0.002	2567.499997	-0.001	2.5
40	2502.499998	-0.001	2567.499997	-0.001	2.5
50	2502.499997	-0.001	2567.499999	0.000	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 7				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
7.7	2505.000004	0.002	2565.000004	0.002	2.5
6.54	2505.000001	0.000	2565.000003	0.001	2.5
8.85	2505.000003	0.001	2565.000002	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 6.54 Vdc to 8.85 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 7				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2505.000003	0.001	2565.000003	0.001	2.5
-20	2505.000002	0.001	2565.000003	0.001	2.5
-10	2505.000003	0.001	2565.000001	0.000	2.5
0	2505.000002	0.001	2565.000002	0.001	2.5
10	2505.000002	0.001	2565.000002	0.001	2.5
20	2504.999996	-0.002	2564.999996	-0.001	2.5
30	2504.999996	-0.002	2564.999999	0.000	2.5
40	2504.999997	-0.001	2564.999999	0.000	2.5
50	2504.999998	-0.001	2564.999998	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 7				Limit (ppm)
	Channel Bandwidth: 15 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
7.7	2507.500004	0.001	2562.500004	0.001	2.5
6.54	2507.500002	0.001	2562.500002	0.001	2.5
8.85	2507.500002	0.001	2562.500002	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 6.54 Vdc to 8.85 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 7				Limit (ppm)
	Channel Bandwidth: 15 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2507.500002	0.001	2562.500003	0.001	2.5
-20	2507.500003	0.001	2562.500001	0.000	2.5
-10	2507.500003	0.001	2562.500003	0.001	2.5
0	2507.500002	0.001	2562.500002	0.001	2.5
10	2507.500001	0.000	2562.500002	0.001	2.5
20	2507.499996	-0.002	2562.499998	-0.001	2.5
30	2507.499999	0.000	2562.499998	-0.001	2.5
40	2507.499998	-0.001	2562.499998	-0.001	2.5
50	2507.499998	-0.001	2562.499998	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 7				Limit (ppm)
	Channel Bandwidth: 20 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
7.7	2510.000004	0.002	2560.000003	0.001	2.5
6.54	2510.000001	0.001	2560.000002	0.001	2.5
8.85	2510.000002	0.001	2560.000002	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 6.54 Vdc to 8.85 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 7				Limit (ppm)
	Channel Bandwidth: 20 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2510.000004	0.001	2560.000002	0.001	2.5
-20	2510.000001	0.000	2560.000002	0.001	2.5
-10	2510.000003	0.001	2560.000001	0.001	2.5
0	2510.000001	0.001	2560.000003	0.001	2.5
10	2510.000003	0.001	2560.000003	0.001	2.5
20	2509.999998	-0.001	2559.999997	-0.001	2.5
30	2509.999998	-0.001	2559.999997	-0.001	2.5
40	2509.999996	-0.001	2559.999998	-0.001	2.5
50	2509.999997	-0.001	2559.999998	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 41				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
7.7	2498.500003	0.001	2687.500004	0.001	2.5
6.54	2498.500002	0.001	2687.500004	0.001	2.5
8.85	2498.500003	0.001	2687.500002	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 6.54 Vdc to 8.85 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 41				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2498.500002	0.001	2687.500002	0.001	2.5
-20	2498.500004	0.001	2687.500003	0.001	2.5
-10	2498.500002	0.001	2687.500001	0.000	2.5
0	2498.500002	0.001	2687.500002	0.001	2.5
10	2498.500002	0.001	2687.500002	0.001	2.5
20	2498.499997	-0.001	2687.499999	-0.001	2.5
30	2498.499997	-0.001	2687.499999	0.000	2.5
40	2498.499998	-0.001	2687.499997	-0.001	2.5
50	2498.499998	-0.001	2687.499999	0.000	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 41				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
7.7	2501.000003	0.001	2685.000003	0.001	2.5
6.54	2501.000002	0.001	2685.000004	0.001	2.5
8.85	2501.000003	0.001	2685.000002	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 6.54 Vdc to 8.85 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 41				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2501.000003	0.001	2685.000001	0.001	2.5
-20	2501.000003	0.001	2685.000003	0.001	2.5
-10	2501.000002	0.001	2685.000002	0.001	2.5
0	2501.000003	0.001	2685.000001	0.000	2.5
10	2501.000003	0.001	2685.000002	0.001	2.5
20	2500.999997	-0.001	2684.999999	0.000	2.5
30	2500.999999	0.000	2684.999997	-0.001	2.5
40	2500.999997	-0.001	2684.999999	0.000	2.5
50	2500.999997	-0.001	2684.999999	0.000	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 41				Limit (ppm)
	Channel Bandwidth: 15 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
7.7	2503.500003	0.001	2682.500003	0.001	2.5
6.54	2503.500001	0.000	2682.500002	0.001	2.5
8.85	2503.500002	0.001	2682.500002	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 6.54 Vdc to 8.85 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 41				Limit (ppm)
	Channel Bandwidth: 15 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2503.500004	0.001	2682.500004	0.001	2.5
-20	2503.500003	0.001	2682.500003	0.001	2.5
-10	2503.500002	0.001	2682.500003	0.001	2.5
0	2503.500002	0.001	2682.500002	0.001	2.5
10	2503.500002	0.001	2682.500002	0.001	2.5
20	2503.499999	-0.001	2682.499998	-0.001	2.5
30	2503.499998	-0.001	2682.499999	0.000	2.5
40	2503.499998	-0.001	2682.499998	-0.001	2.5
50	2503.499997	-0.001	2682.499996	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 41				Limit (ppm)
	Channel Bandwidth: 20 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
7.7	2506.000003	0.001	2680.000003	0.001	2.5
6.54	2506.000003	0.001	2680.000002	0.001	2.5
8.85	2506.000003	0.001	2680.000001	0.000	2.5

Note: The applicant defined the normal working voltage of the battery is from 6.54 Vdc to 8.85 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 41				Limit (ppm)
	Channel Bandwidth: 20 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2506.000002	0.001	2680.000002	0.001	2.5
-20	2506.000003	0.001	2680.000004	0.001	2.5
-10	2506.000002	0.001	2680.000004	0.001	2.5
0	2506.000002	0.001	2680.000003	0.001	2.5
10	2506.000004	0.002	2680.000001	0.000	2.5
20	2505.999997	-0.001	2679.999996	-0.001	2.5
30	2505.999998	-0.001	2679.999997	-0.001	2.5
40	2505.999996	-0.002	2679.999999	-0.001	2.5
50	2505.999999	-0.001	2679.999998	-0.001	2.5

4.3 Occupied Bandwidth Measurement


4.3.1 Limits of Occupied Bandwidth Measurement

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.3.2 Test Procedure


- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.3.3 Test Setup

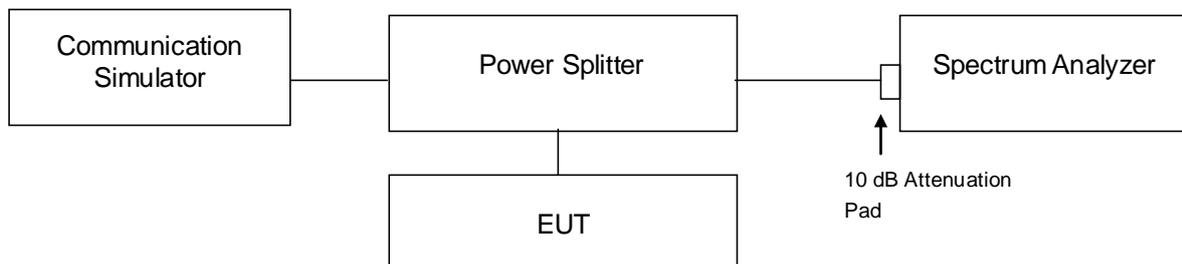

4.3.4 Test Result


LTE Band 7							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
20775	2502.5	4.4870	4.4889	20800	2505.0	8.9673	8.9696
21100	2535.0	4.4892	4.4892	21100	2535.0	8.9758	8.9768
21425	2567.5	4.4873	4.4903	21400	2565.0	8.9712	8.9726

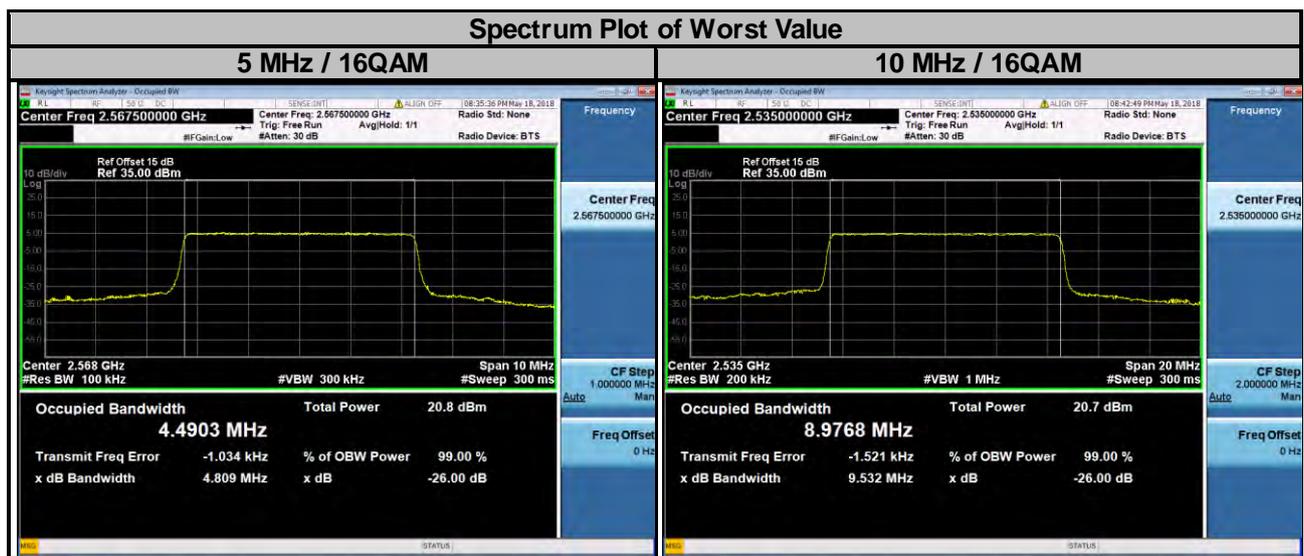


LTE Band 7

Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
20825	2507.5	13.466	13.448	20850	2510.0	17.932	17.950
21100	2535.0	13.489	13.475	21100	2535.0	17.987	18.002
21375	2562.5	13.478	13.459	21350	2560.0	17.940	17.957


Spectrum Plot of Worst Value

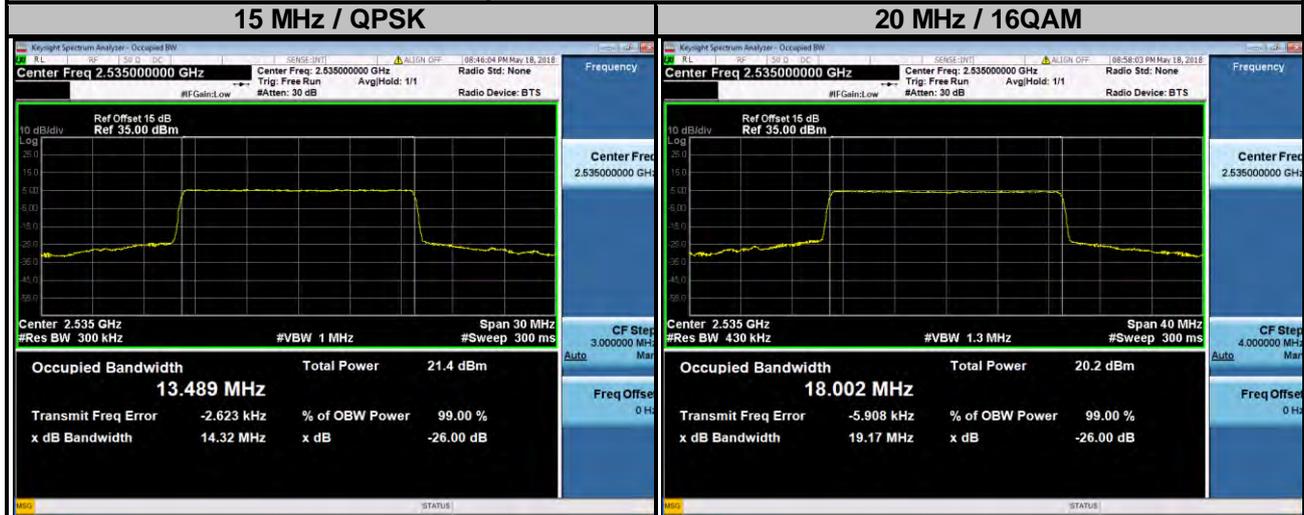

LTE Band 41							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
39675	2498.5	4.4902	4.4854	39700	2501.0	8.9528	8.9595
40620	2593.0	4.4858	4.4855	40620	2593.0	8.9475	8.9699
41565	2687.5	4.4914	4.4909	41540	2685.0	8.9533	8.9567

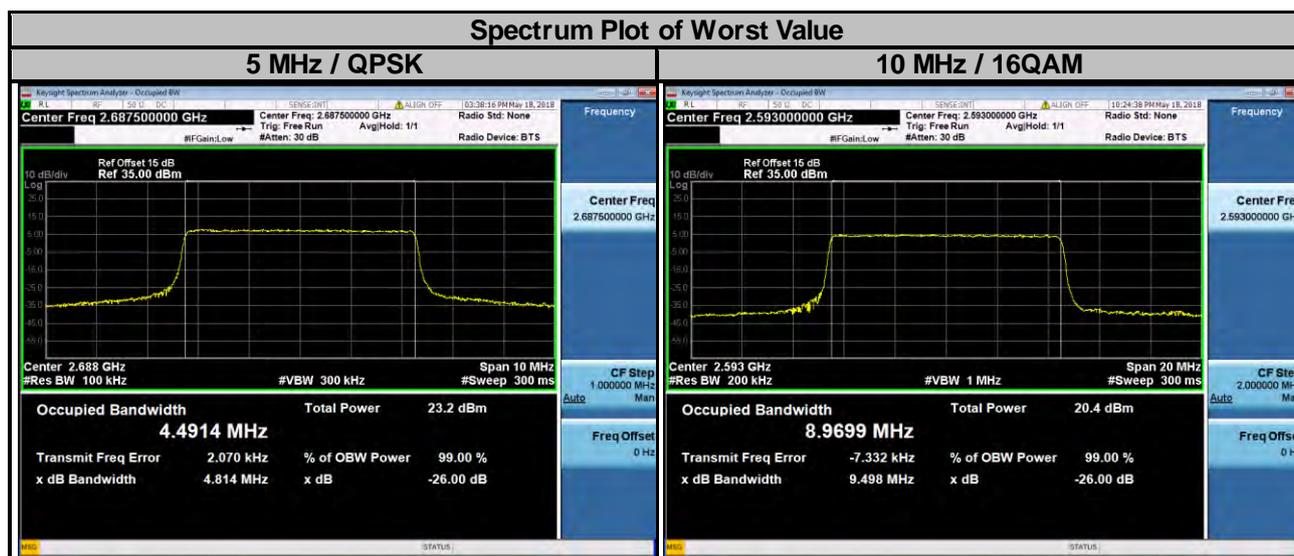

LTE Band 41							
Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
39725	2503.5	13.462	13.440	39750	2506.0	17.925	17.922
40620	2593.0	13.459	13.446	40620	2593.0	17.932	17.932
41515	2682.5	13.456	13.450	41490	2680.0	17.933	17.931

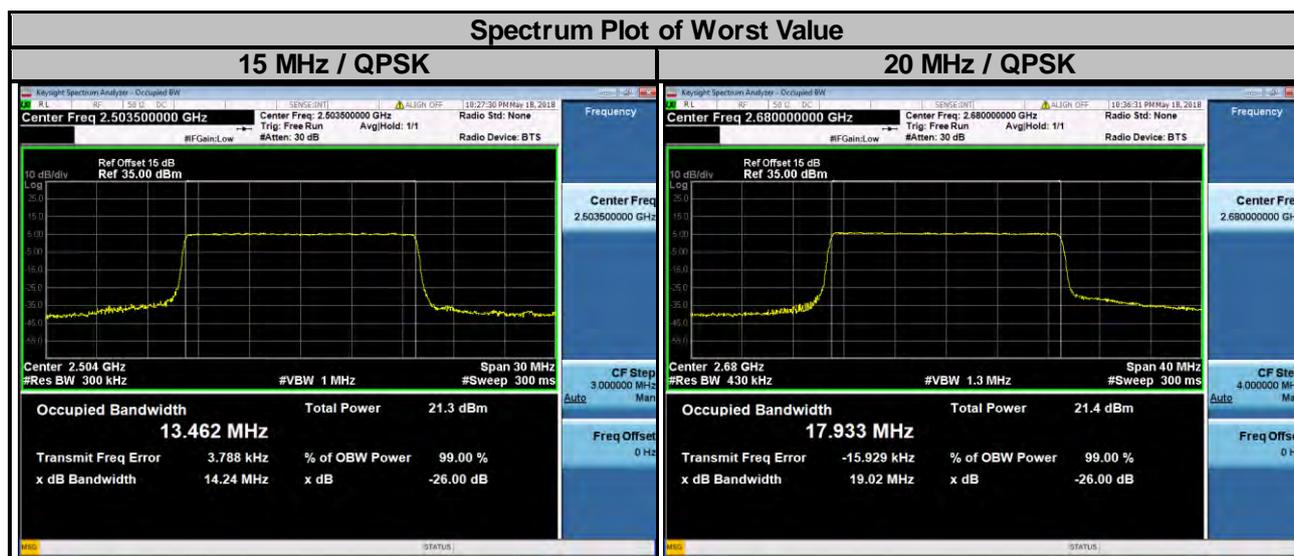


4.4 Out-of-Band Emissions Measurement

4.4.1 Limits of Out-of-Band Emissions Measurement

According to FCC 27.53(l)(4) specified that power of any emission outside of the channel edge must be attenuated below the transmitting power (P) by a factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed, except when the 1 megahertz band is 2495-2496 MHz, in which case a resolution bandwidth of at least one percent may be employed.


4.4.2 Test Setup

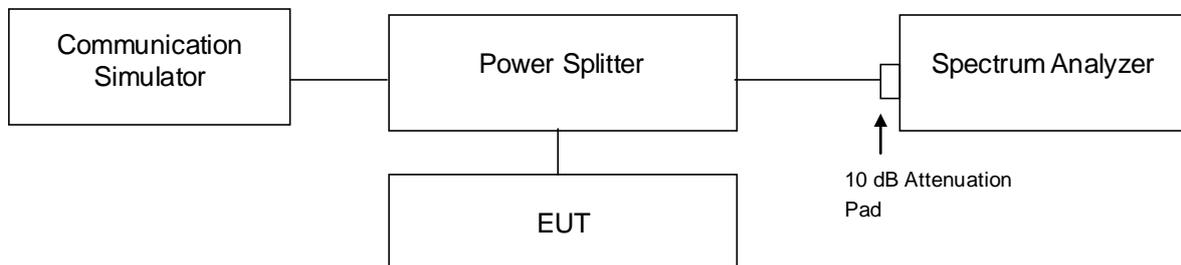



4.4.3 Test Procedures

- The EUT was set up for the maximum peak power with LTE link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels (low and high operational frequency range.).
- The out-of-band emissions measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Record the max. trace plot into the test report.

4.4.4 Test Results

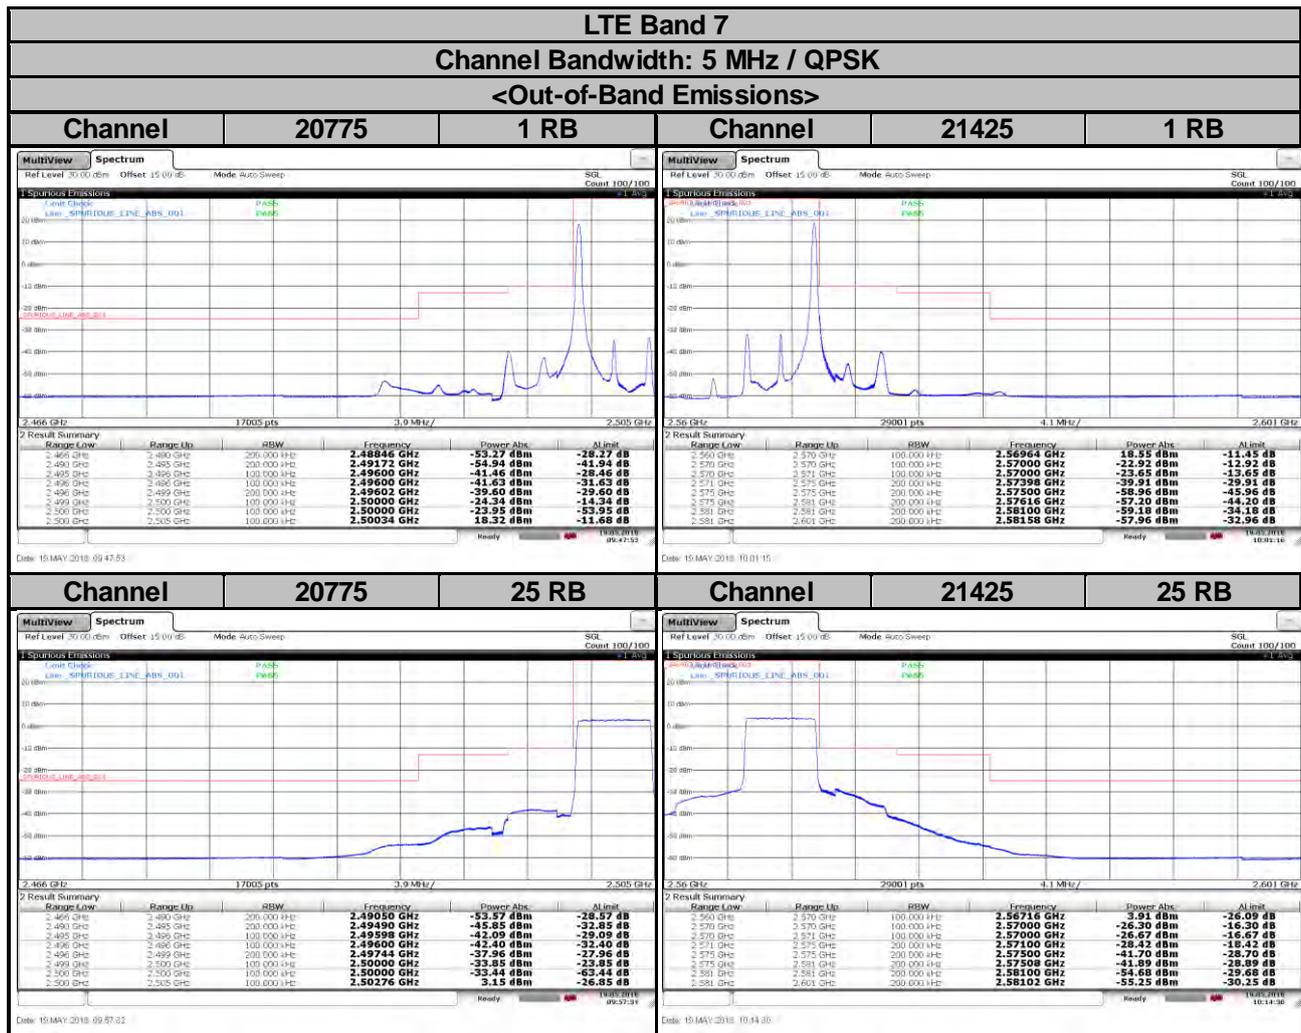


LTE Band 7
Channel Bandwidth: 5 MHz / 16QAM
<Out-of-Band Emissions>

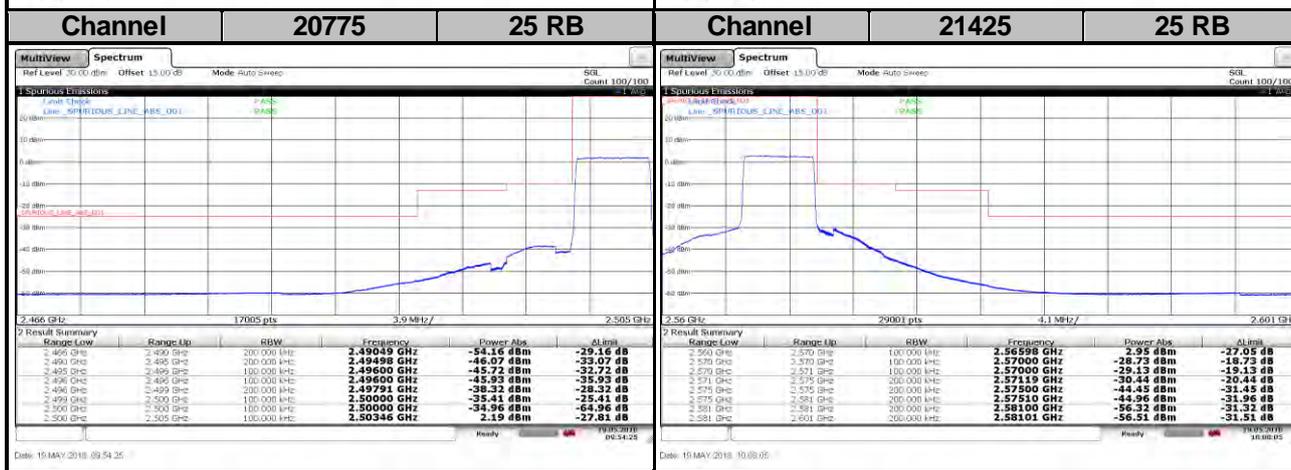
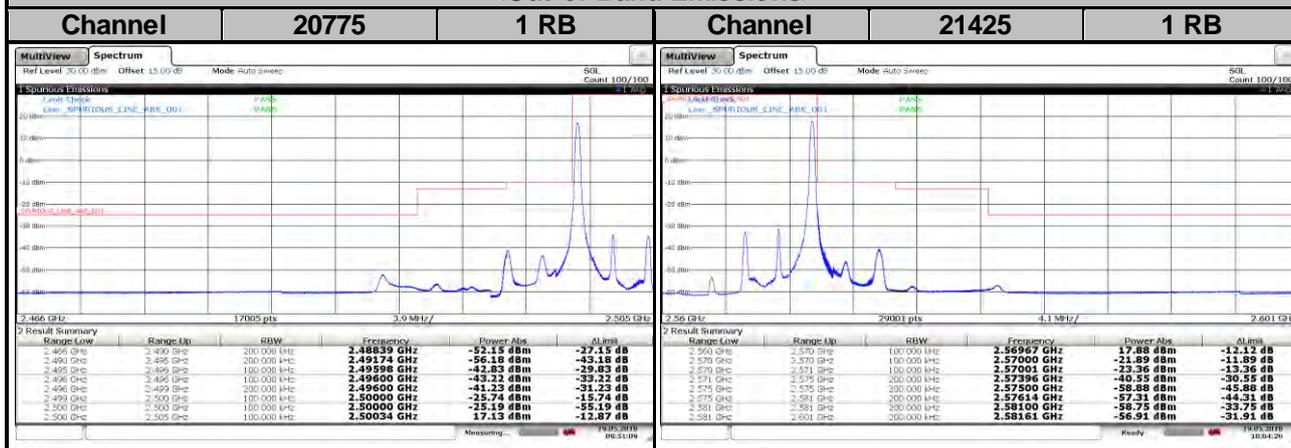


LTE Band 7
Channel Bandwidth: 10 MHz / QPSK



<Out-of-Band Emissions>

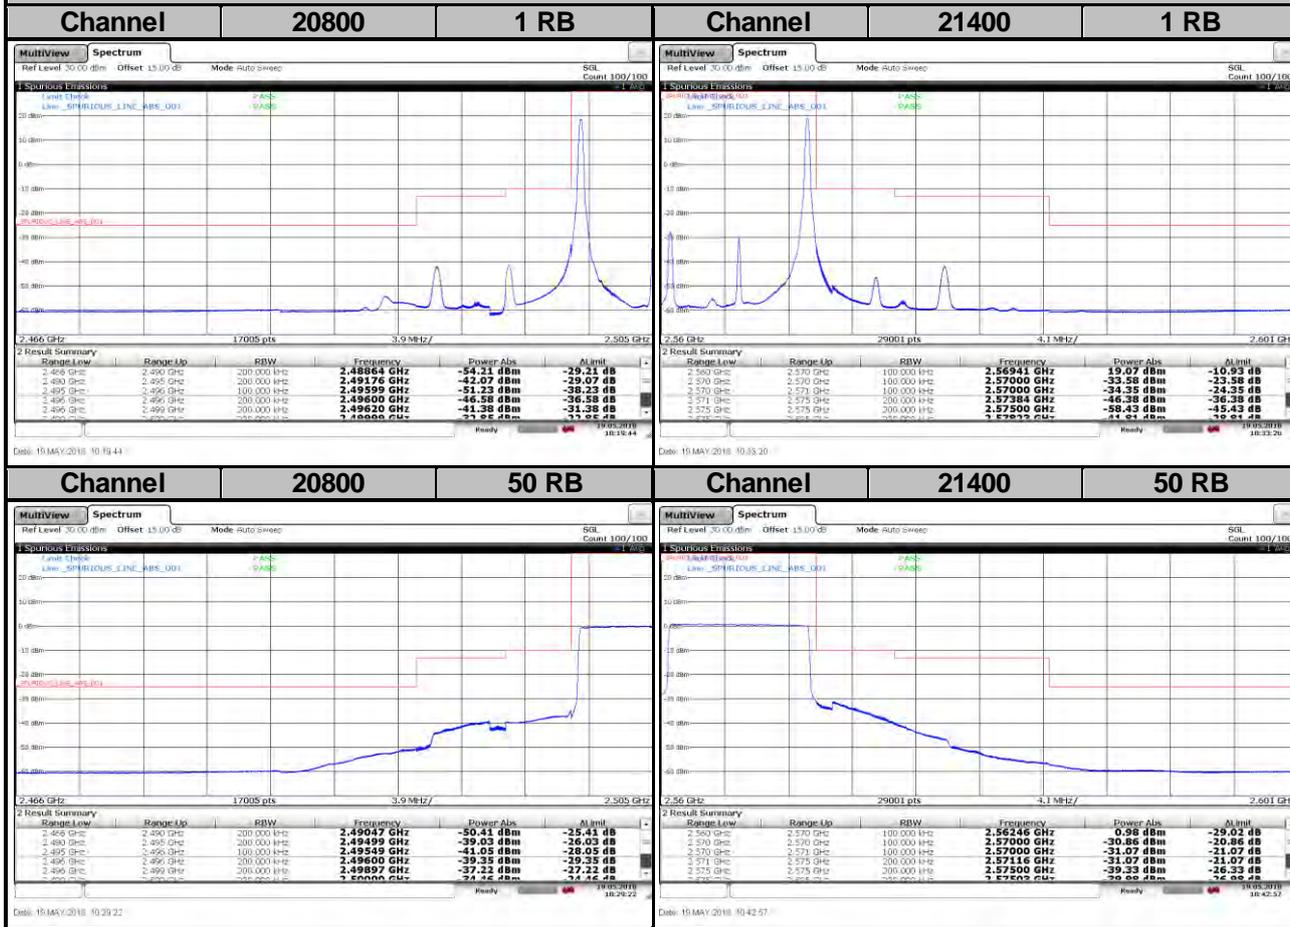



LTE Band 7
Channel Bandwidth: 10 MHz / 16QAM
<Out-of-Band Emissions>

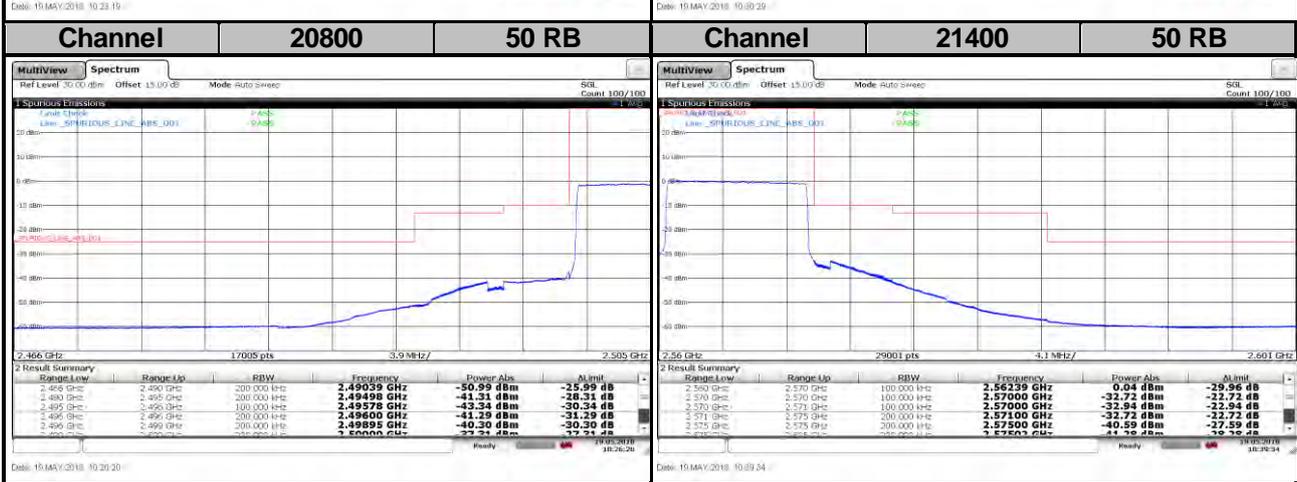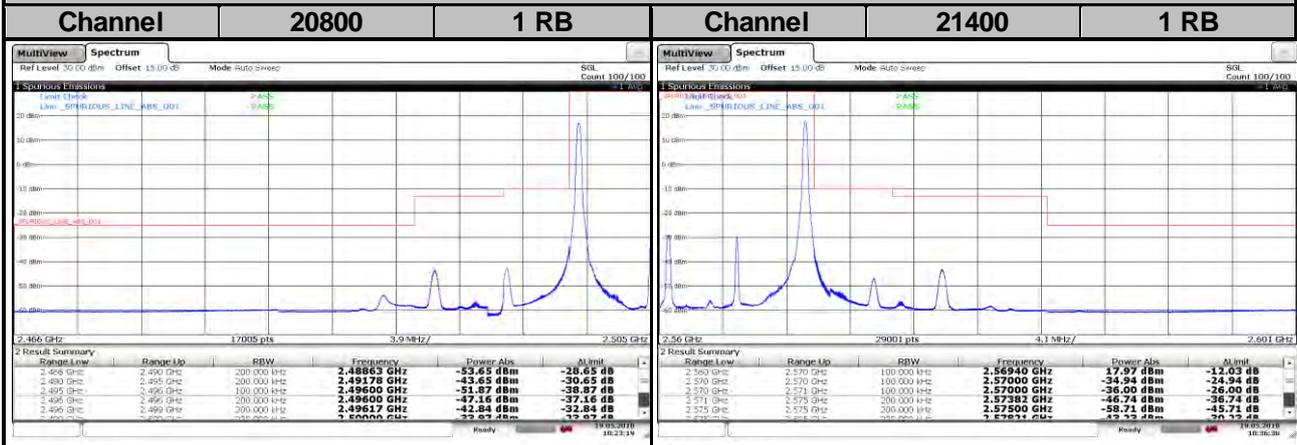


LTE Band 7
Channel Bandwidth: 15 MHz / QPSK
<Out-of-Band Emissions>

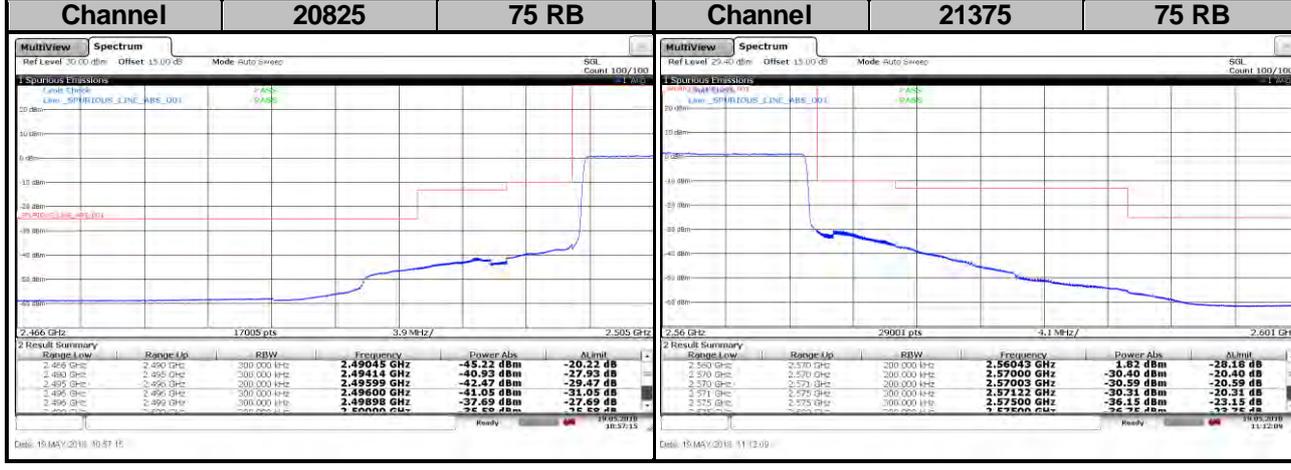
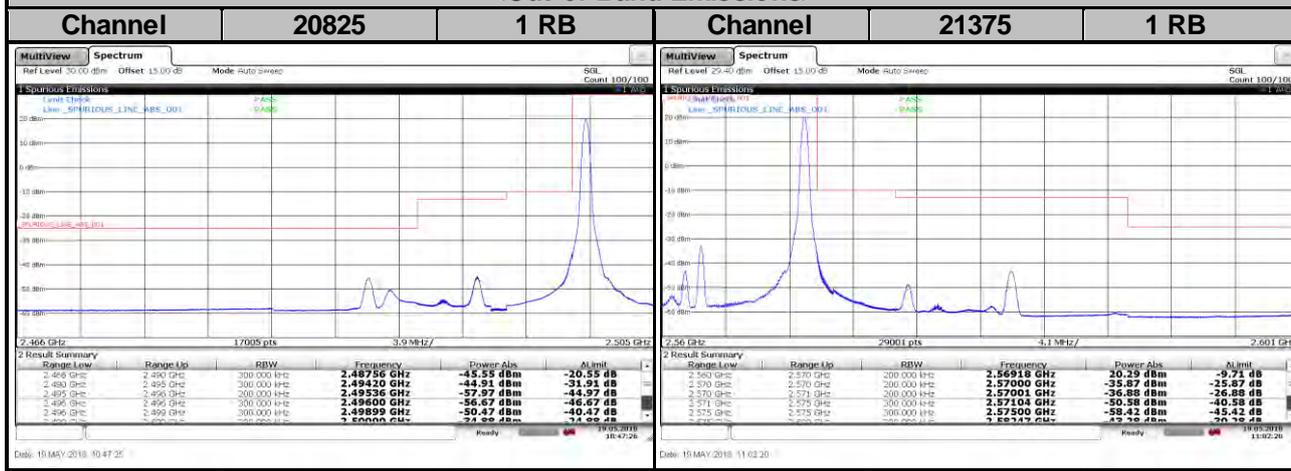



LTE Band 7
Channel Bandwidth: 15 MHz / 16QAM
<Out-of-Band Emissions>

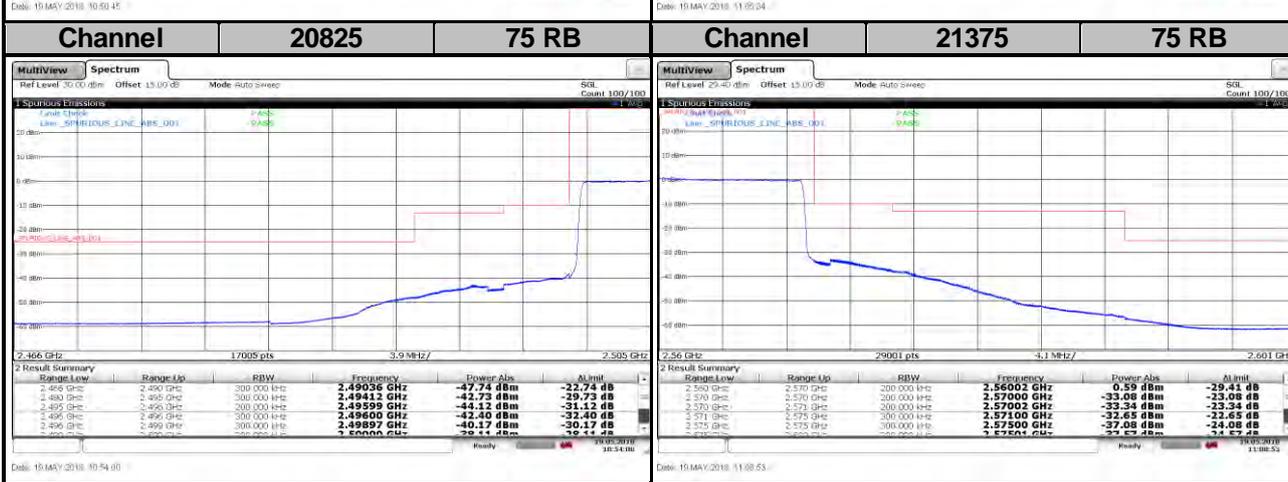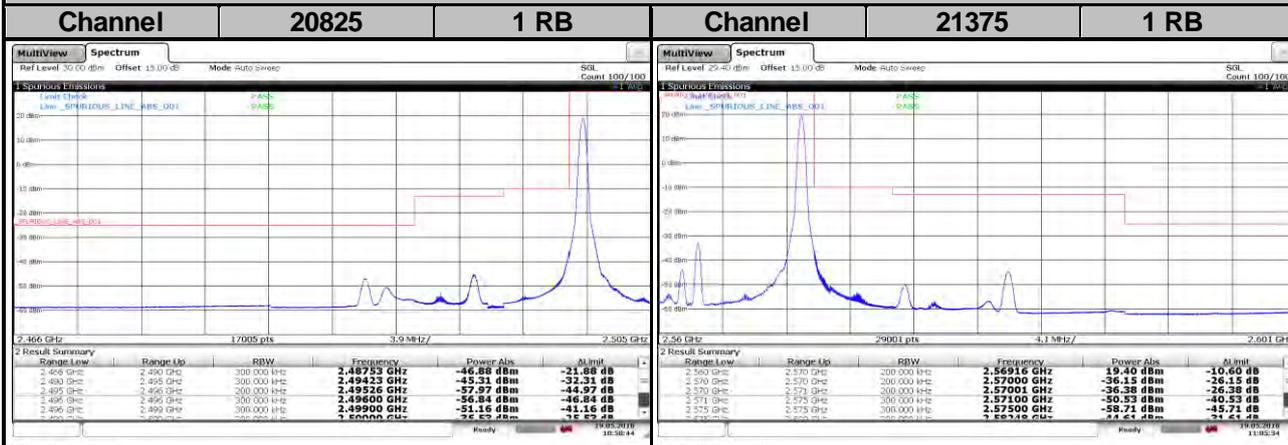

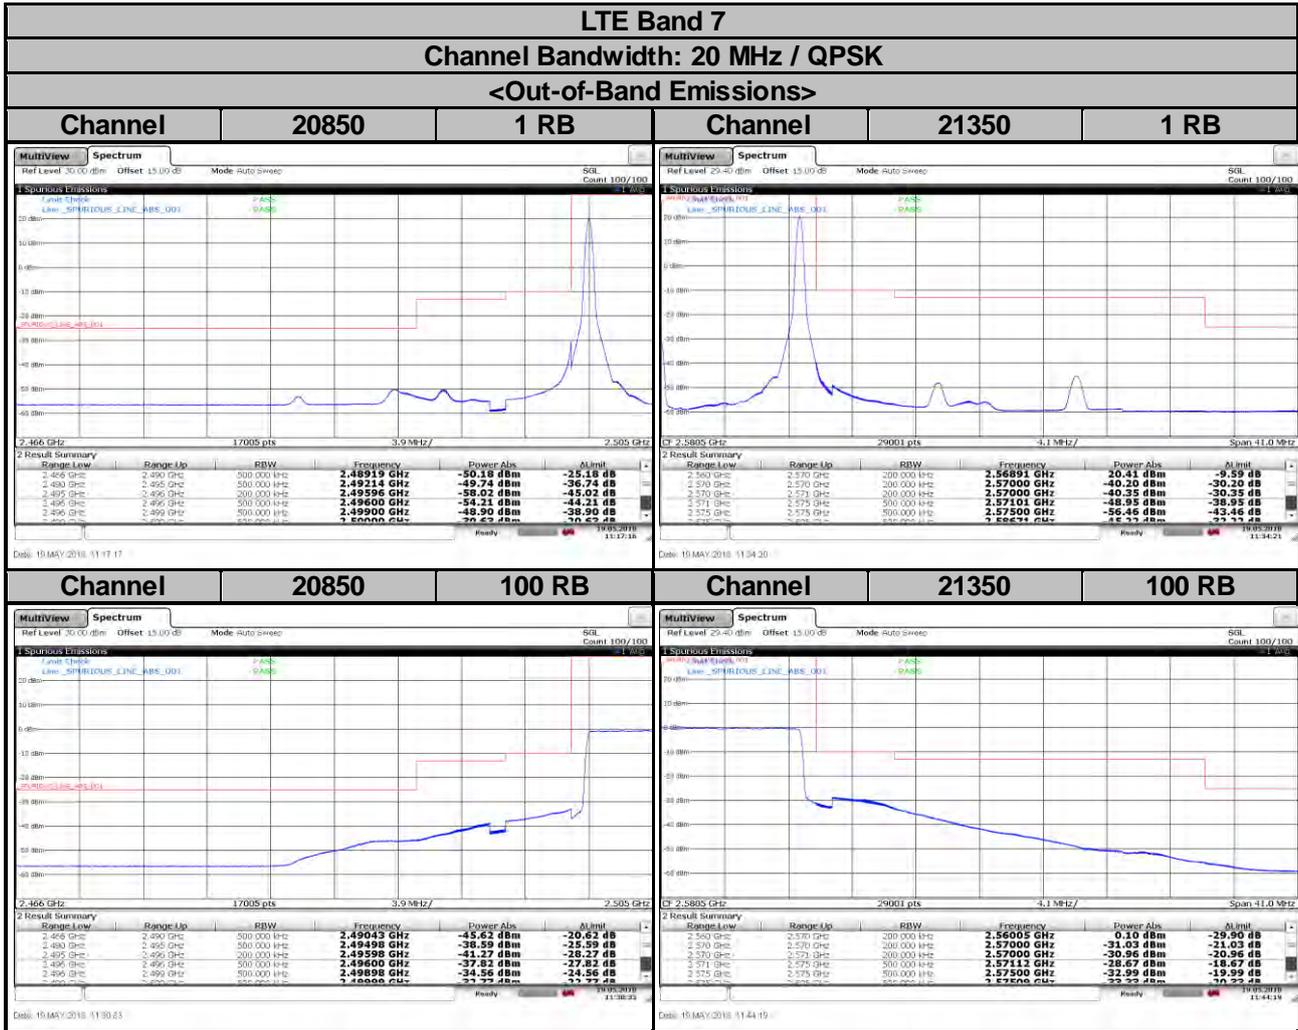


LTE Band 7
Channel Bandwidth: 20 MHz / 16QAM
<Out-of-Band Emissions>

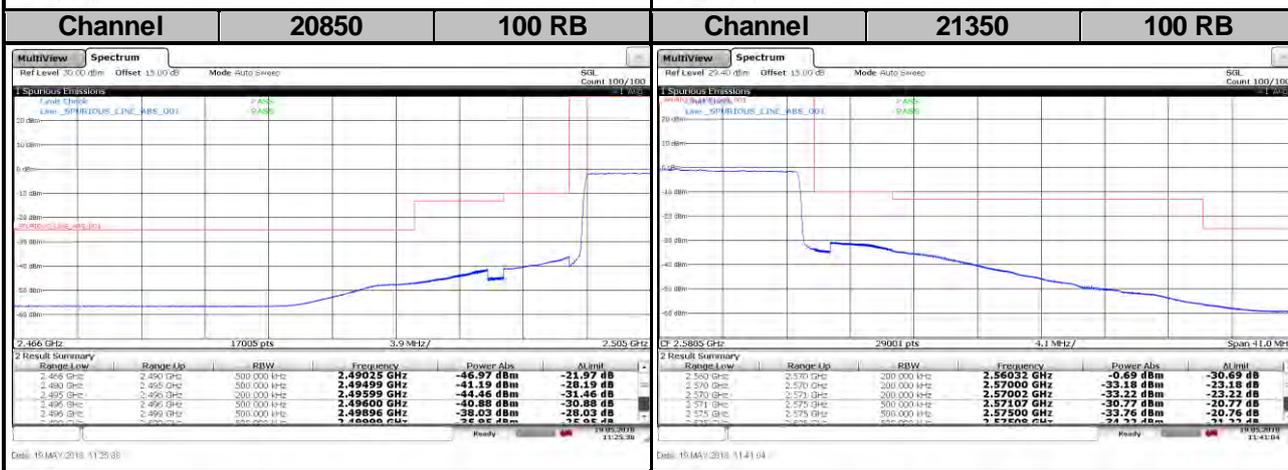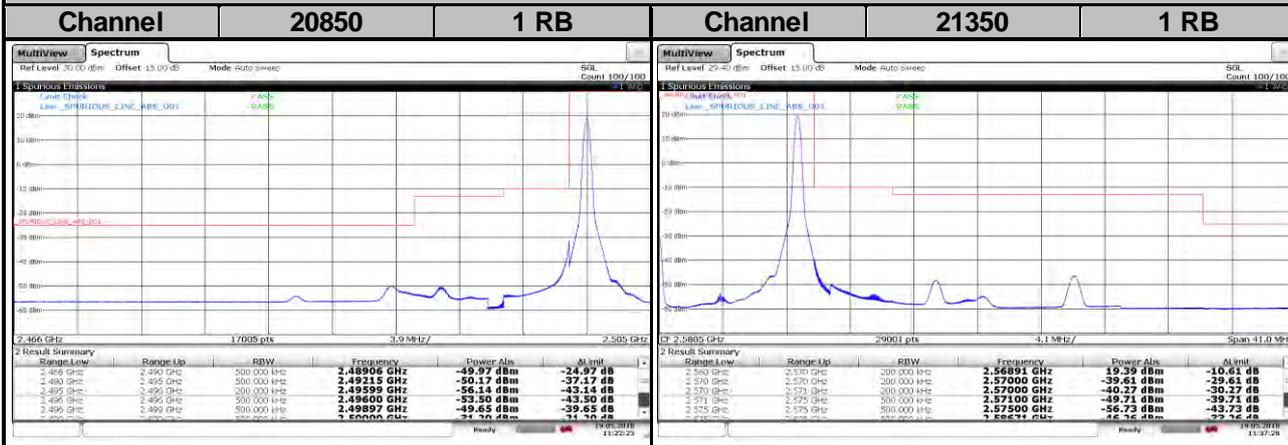

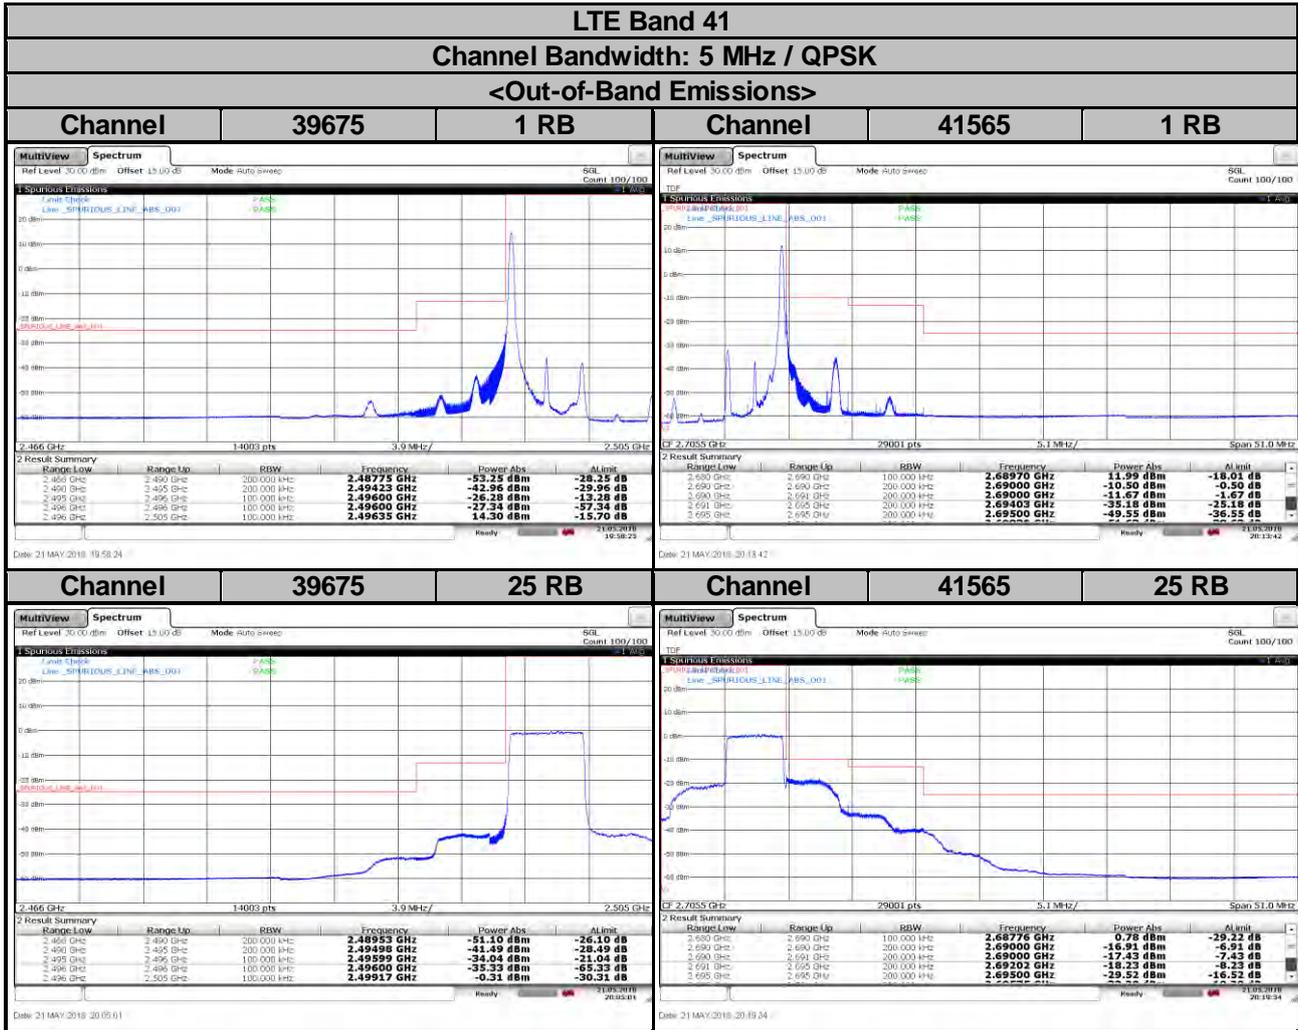


LTE Band 41
Channel Bandwidth: 5 MHz / 16QAM

<Out-of-Band Emissions>

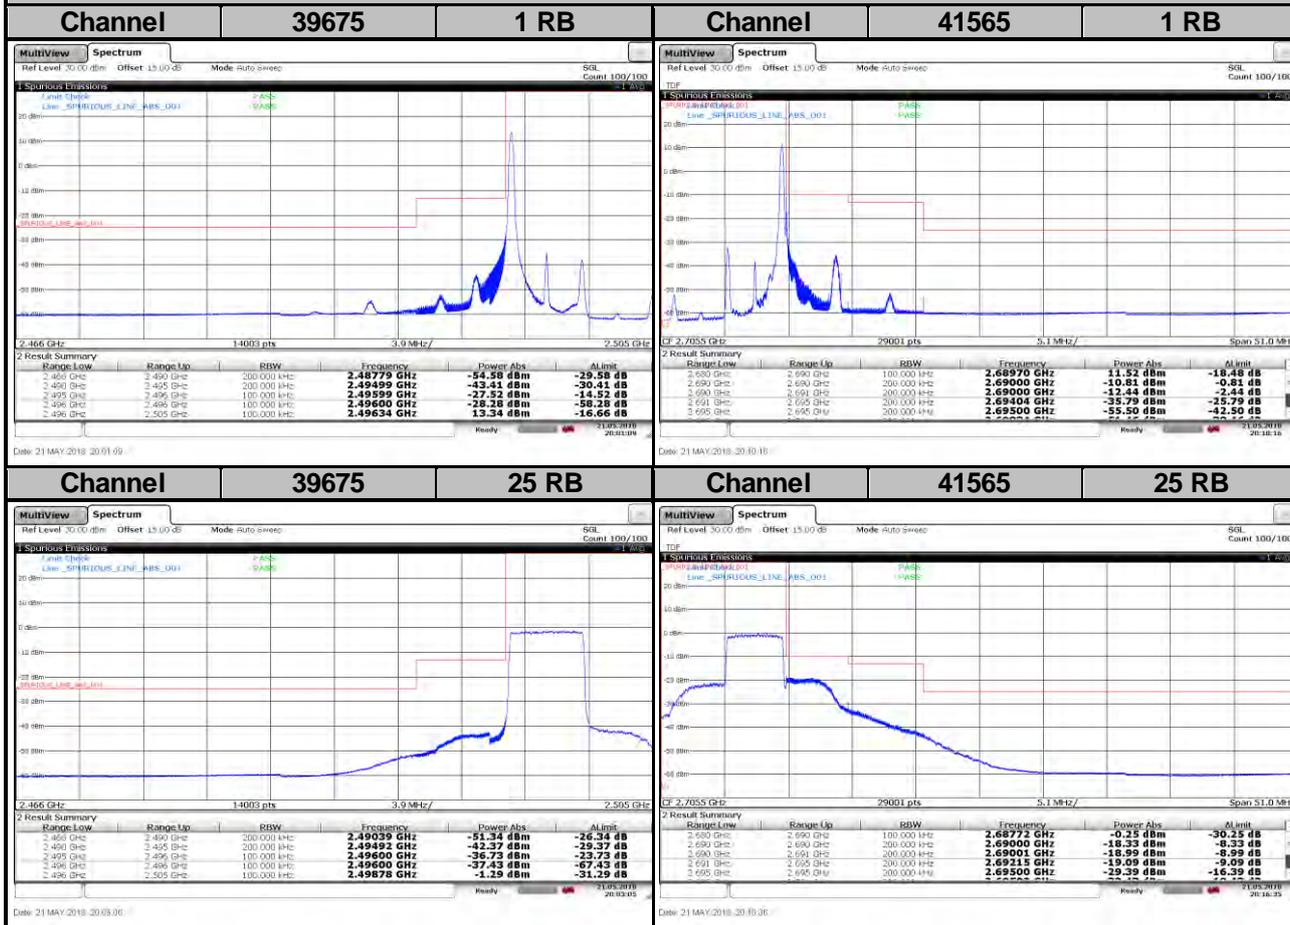


LTE Band 41
Channel Bandwidth: 10 MHz / QPSK


<Out-of-Band Emissions>

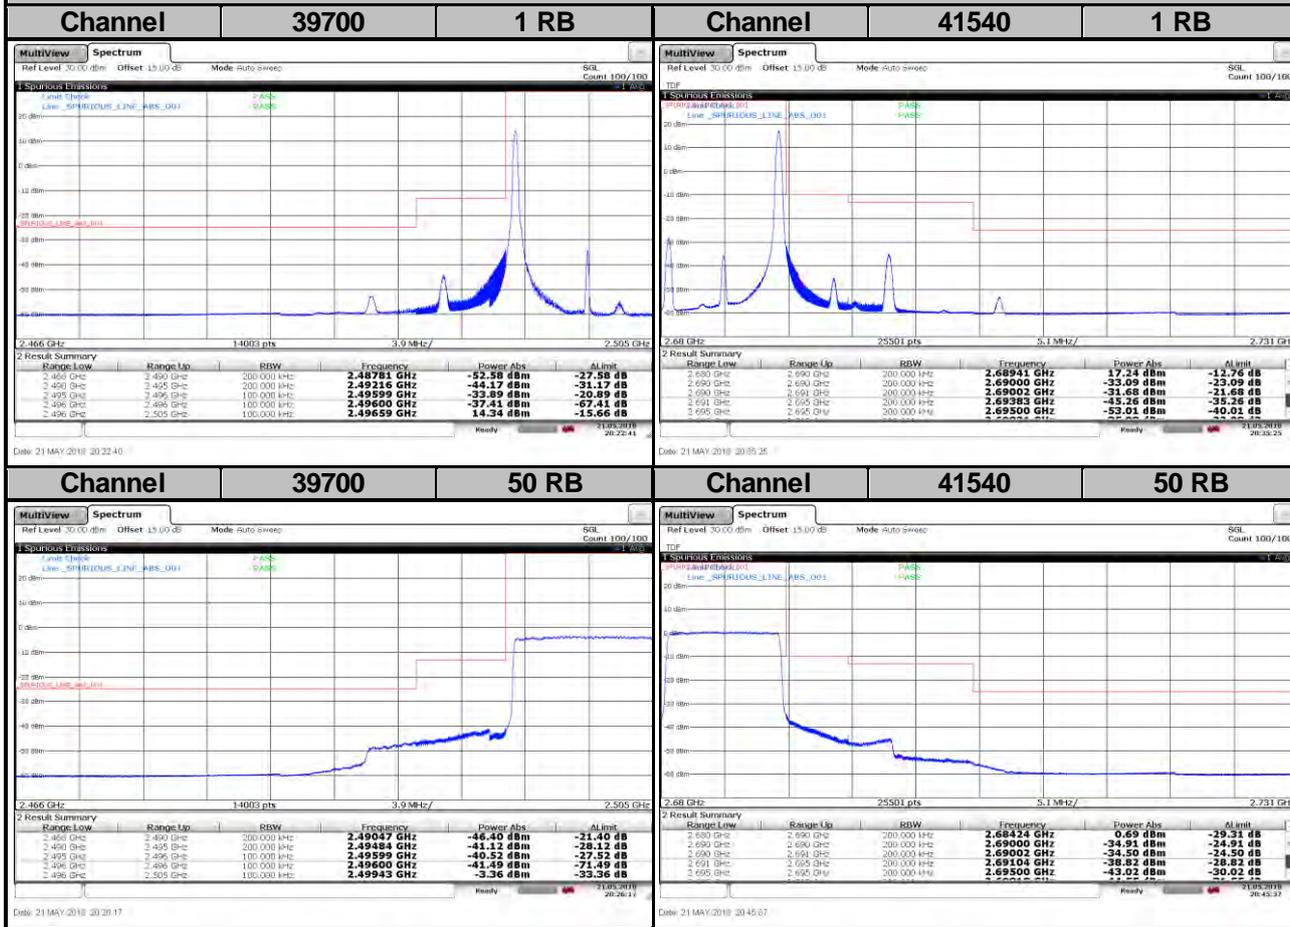

LTE Band 41
Channel Bandwidth: 10 MHz / 16QAM

<Out-of-Band Emissions>

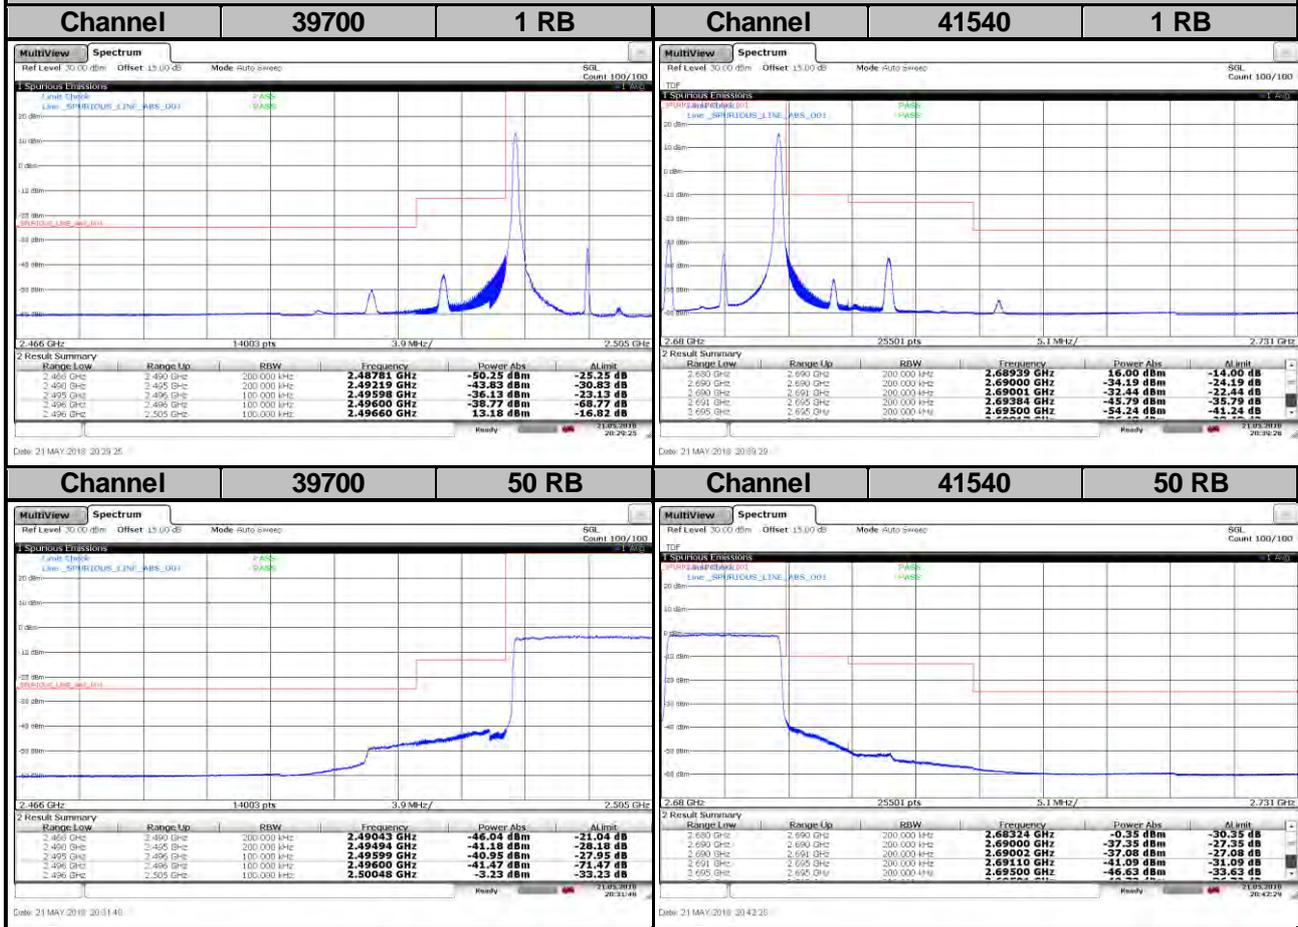


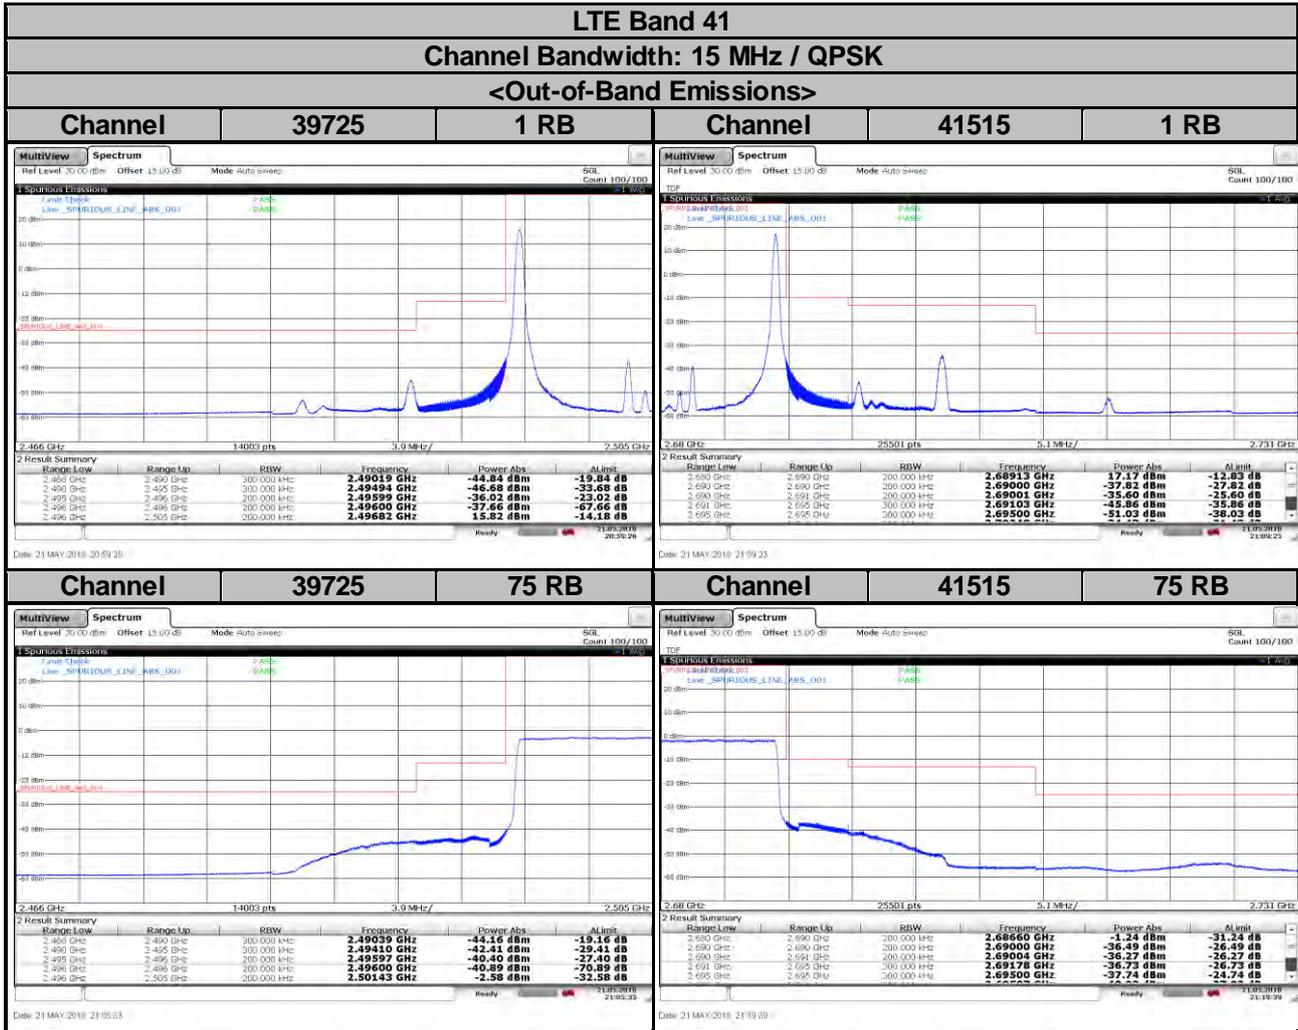



LTE Band 41

Channel Bandwidth: 15 MHz / 16QAM

<Out-of-Band Emissions>

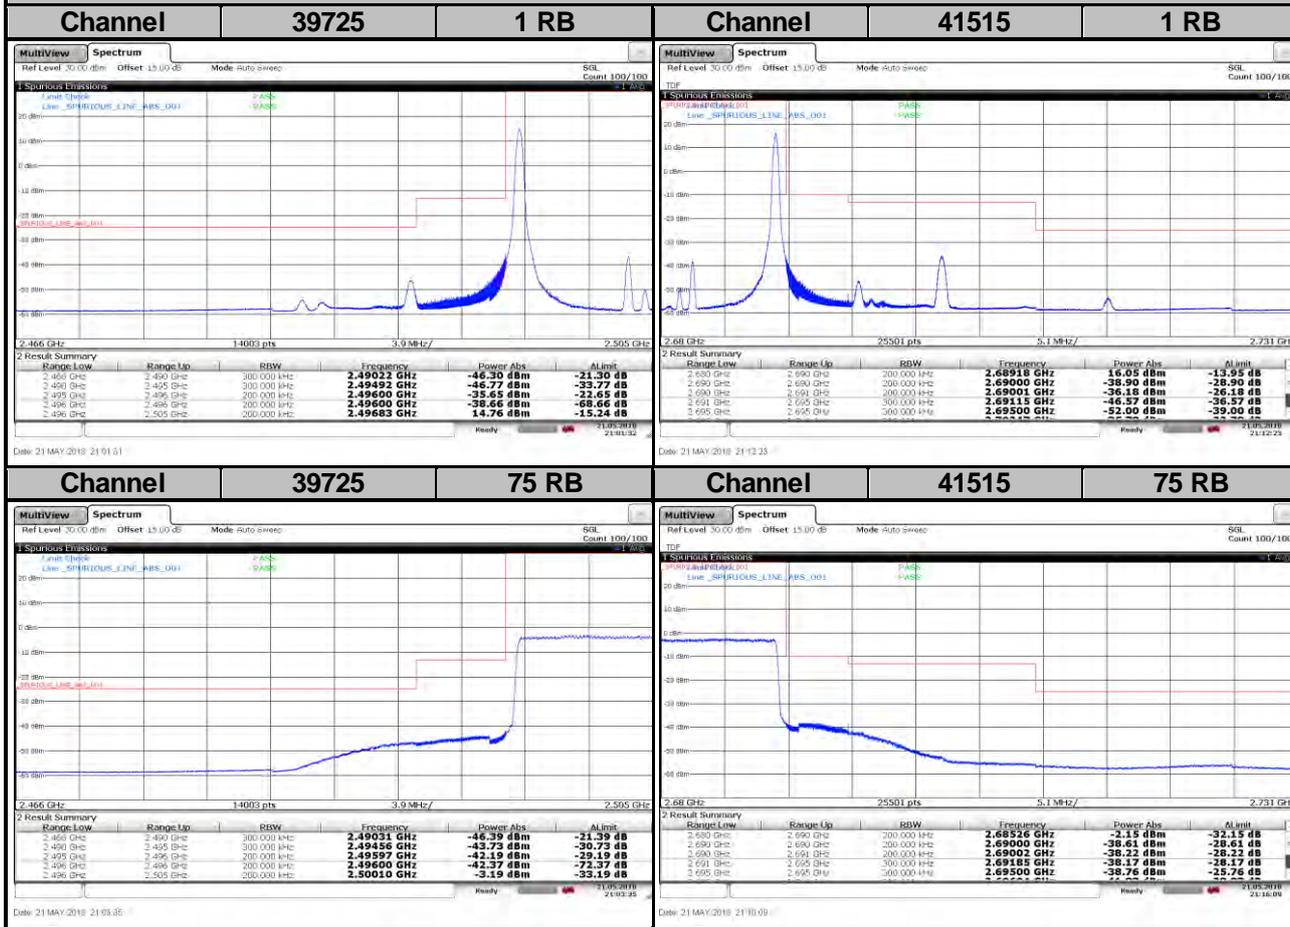

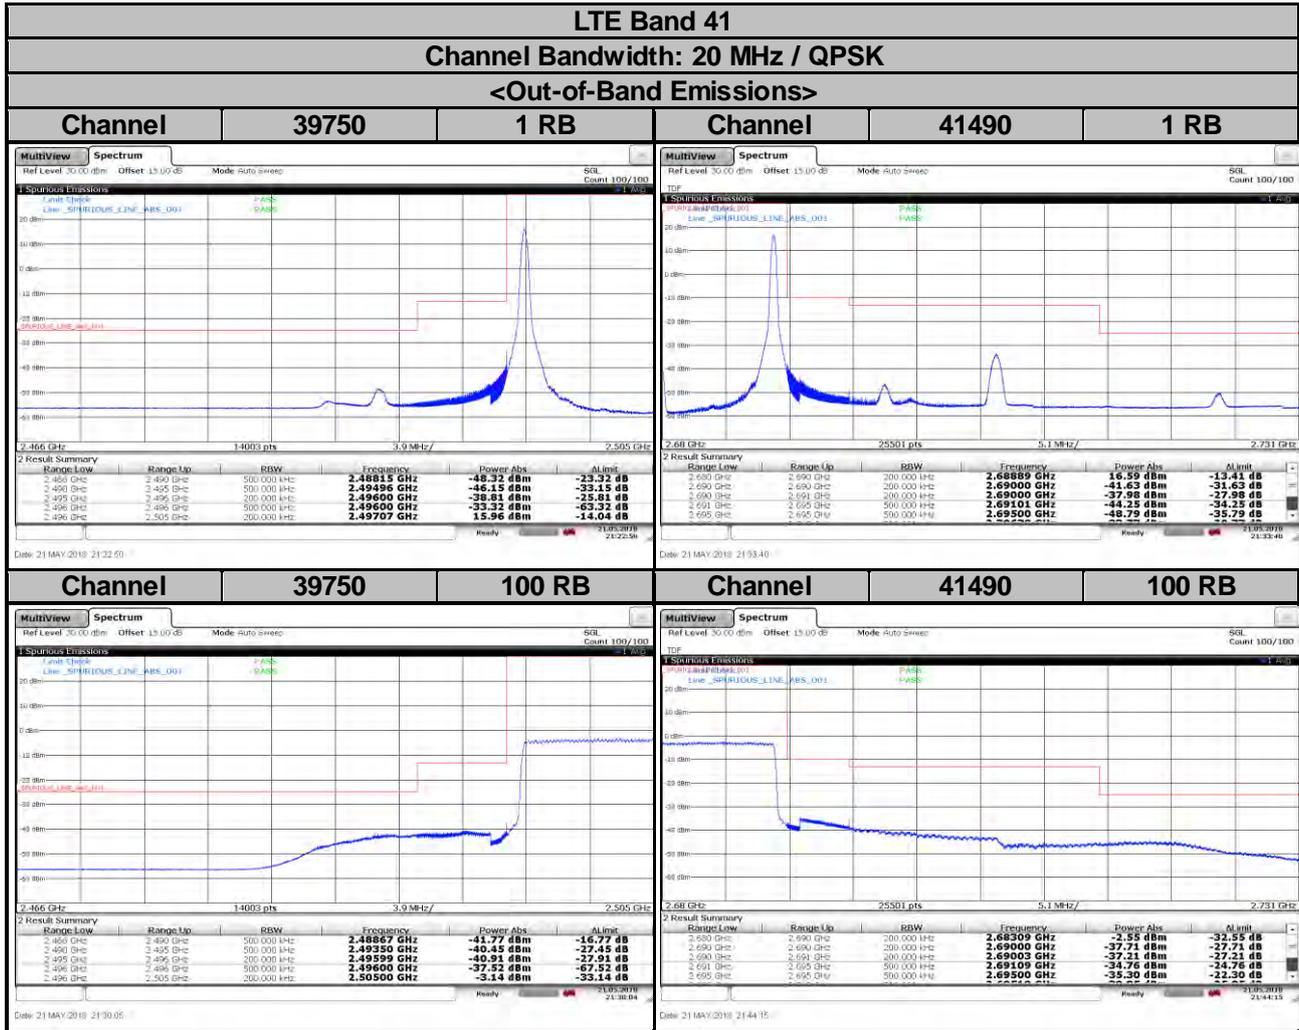

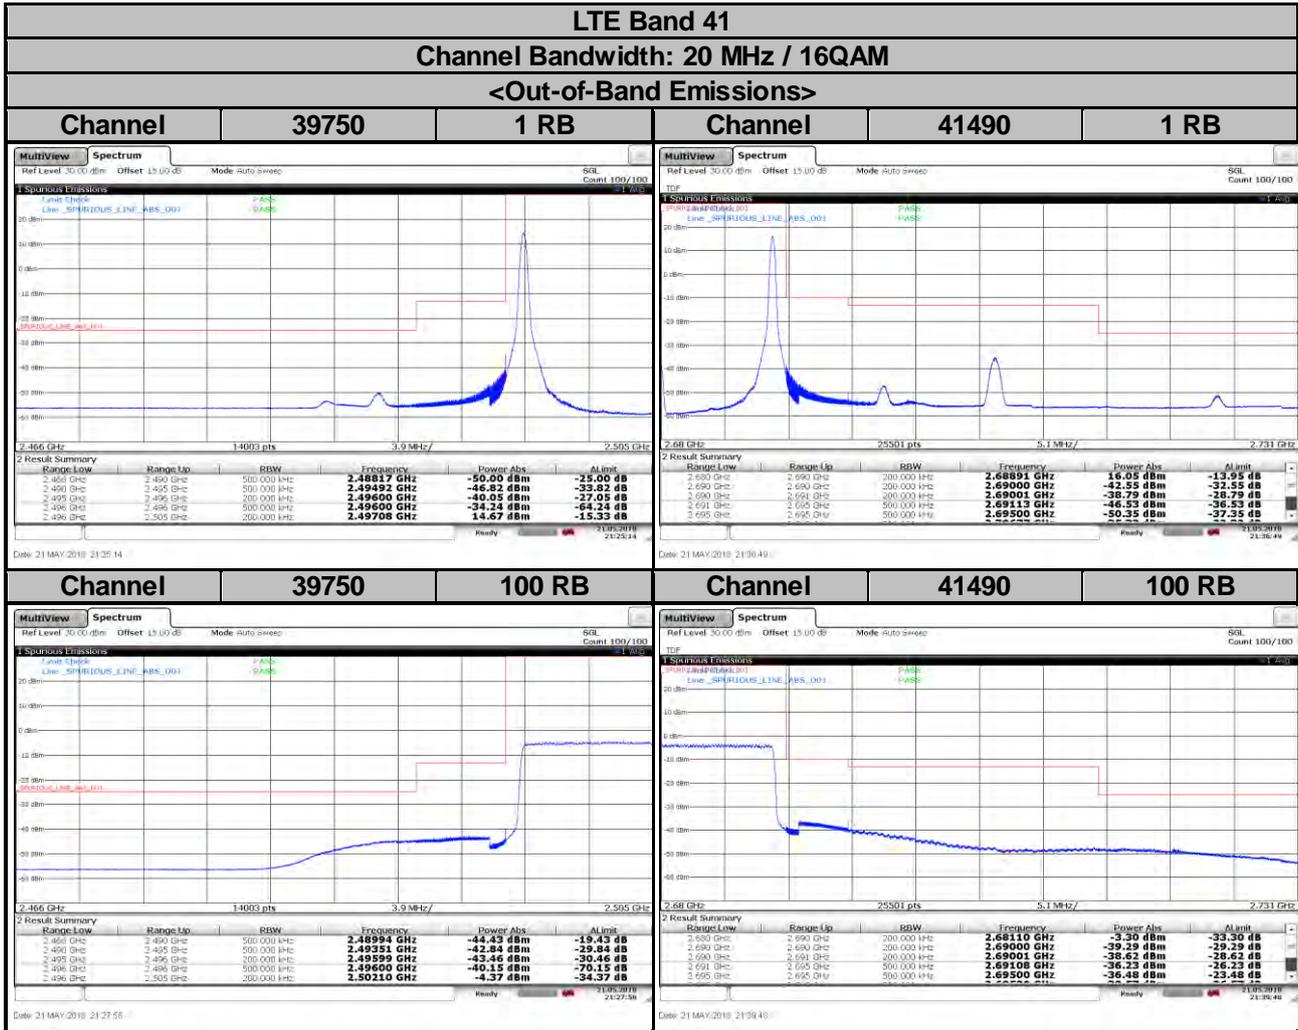


4.5 Peak to Average Ratio

4.5.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.5.2 Test Setup

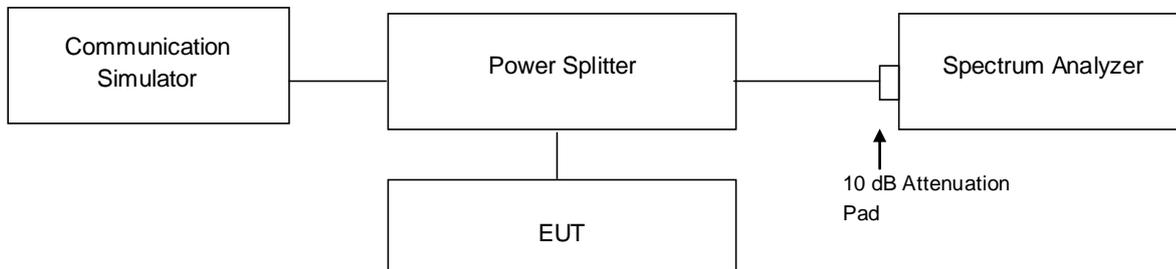


4.5.3 Test Procedures

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1 %.

4.5.4 Test Results

LTE Band 7							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
20775	2502.5	4.81	5.55	20800	2505.0	4.49	5.23
21100	2535.0	3.46	5.59	21100	2535.0	4.42	5.11
21425	2567.5	4.68	5.43	21400	2565.0	4.33	5.05

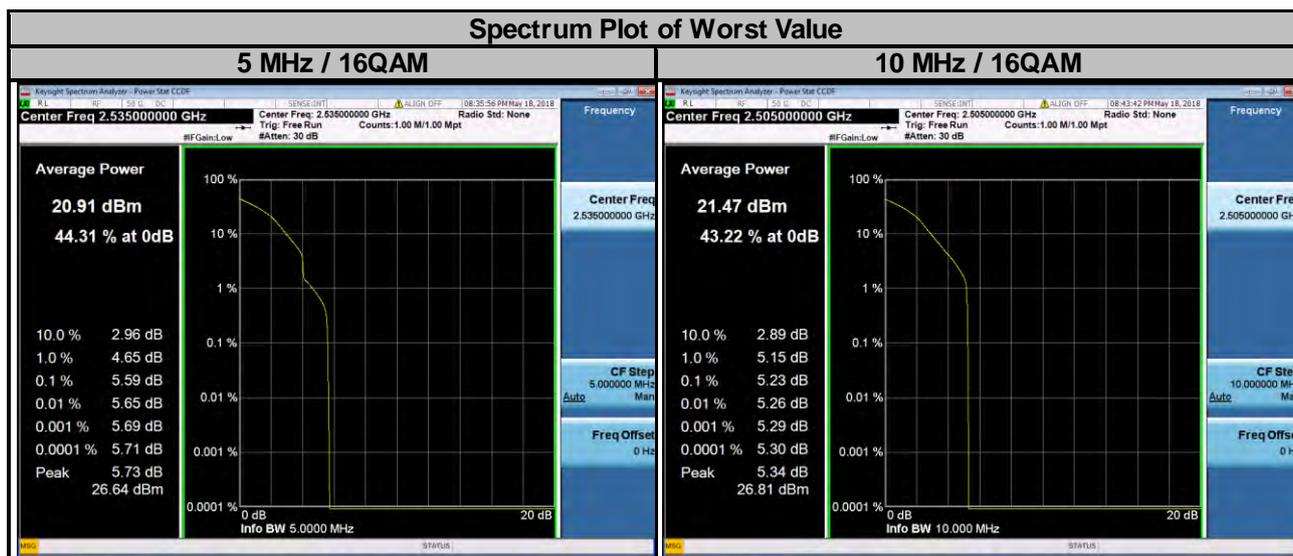

LTE Band 7

Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
20825	2507.5	3.42	4.17	20850	2510.0	4.76	5.48
21100	2535.0	4.67	5.40	21100	2535.0	4.54	5.31
21375	2562.5	4.15	4.94	21350	2560.0	4.52	5.32

Spectrum Plot of Worst Value




LTE Band 41

Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
39675	2498.5	8.31	9.25	39700	2501.0	8.62	9.15
40620	2593.0	8.72	7.99	40620	2593.0	8.70	7.84
41565	2687.5	8.87	9.46	41540	2685.0	8.89	9.33

Spectrum Plot of Worst Value



LTE Band 41							
Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
39725	2503.5	9.45	8.35	39750	2506.0	8.55	9.97
40620	2593.0	7.77	8.44	40620	2593.0	7.54	8.44
41515	2682.5	9.89	8.65	41490	2680.0	8.00	9.98

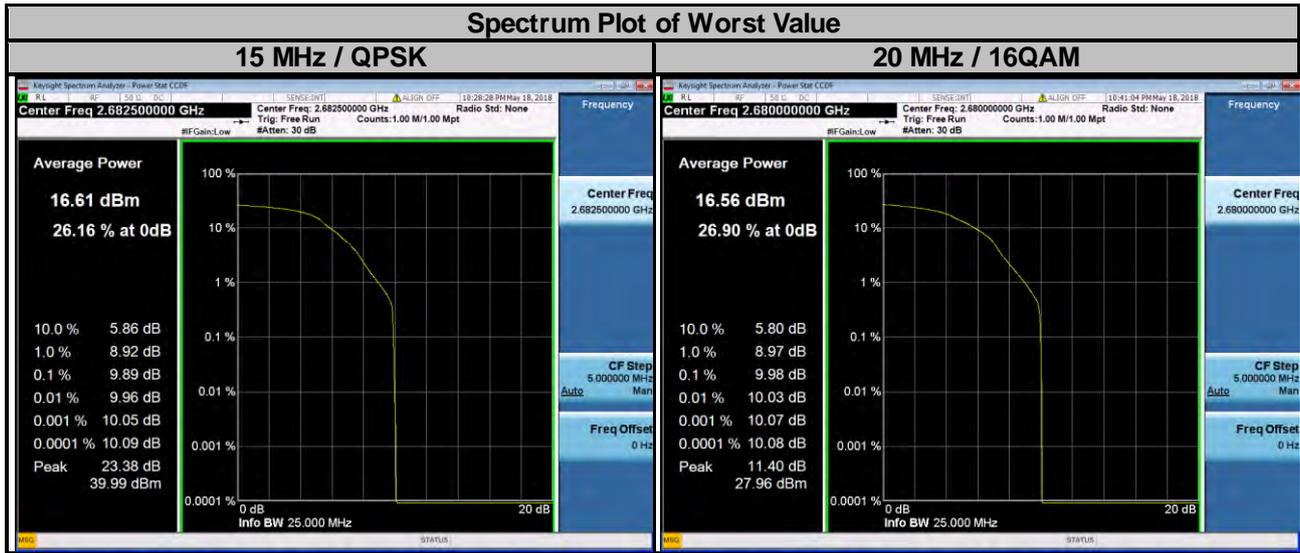


4.6 Conducted Spurious Emissions

4.6.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -25 dBm.


4.6.2 Test Setup

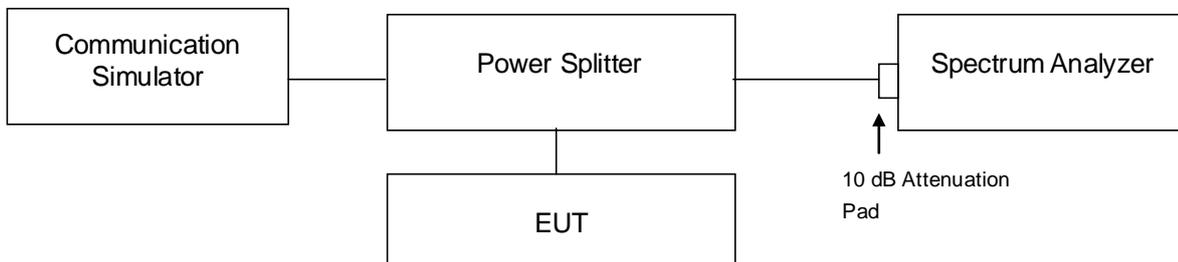

4.6.3 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 30 MHz to 27 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz are used for conducted emission measurement.

4.6.4 Test Results

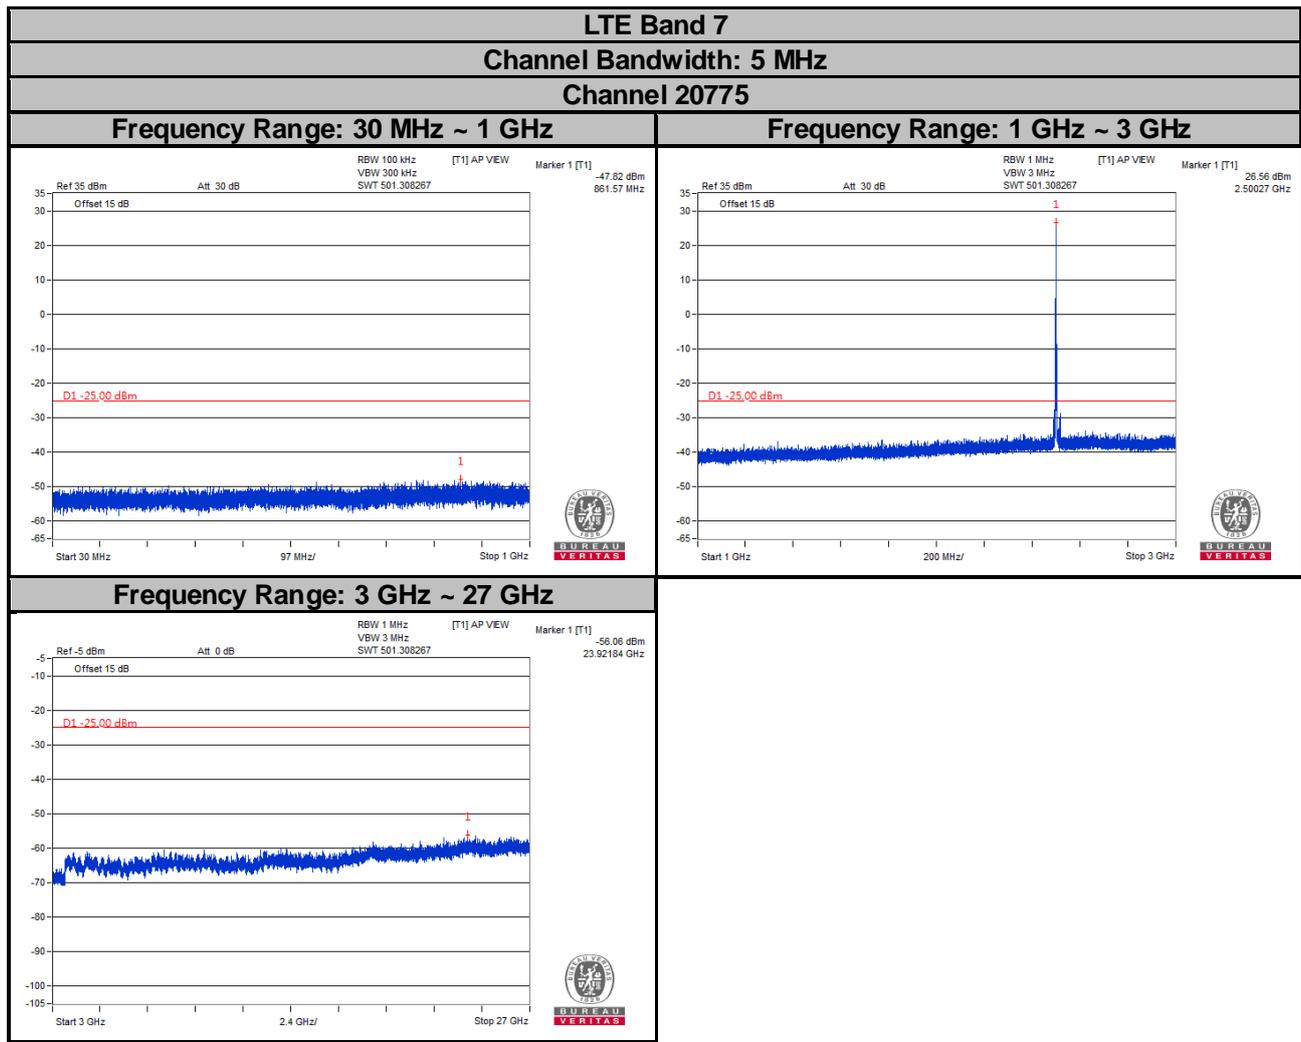


LTE Band 7


Channel Bandwidth: 5 MHz

Channel 21100


Frequency Range: 30 MHz ~ 1 GHz

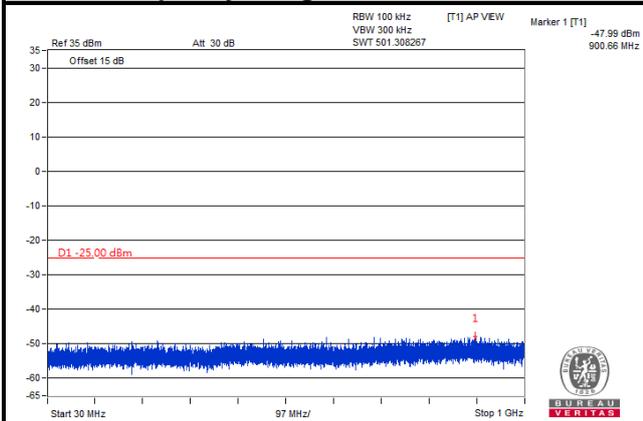




Frequency Range: 1 GHz ~ 3 GHz

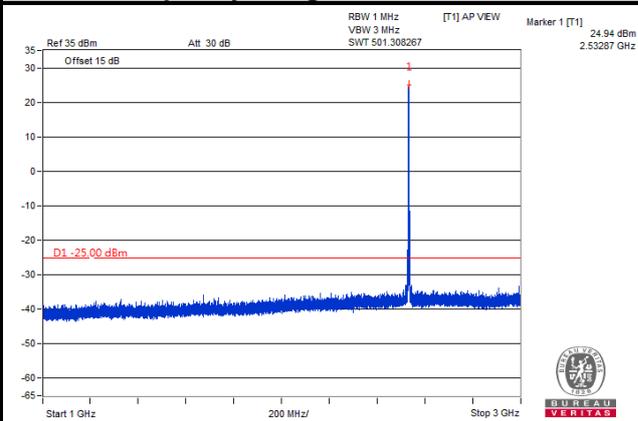



Frequency Range: 3 GHz ~ 27 GHz

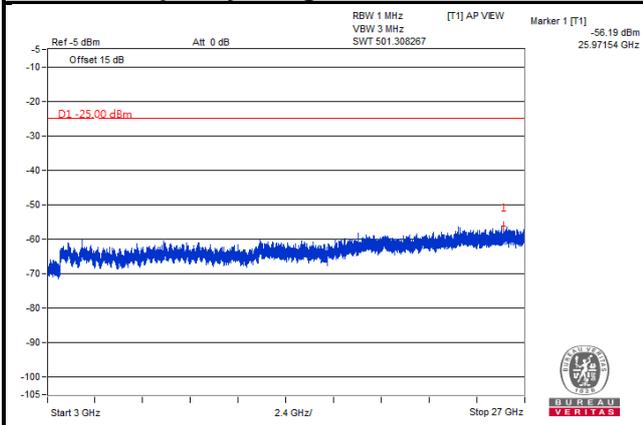




LTE Band 7
Channel Bandwidth: 5 MHz
Channel 21425

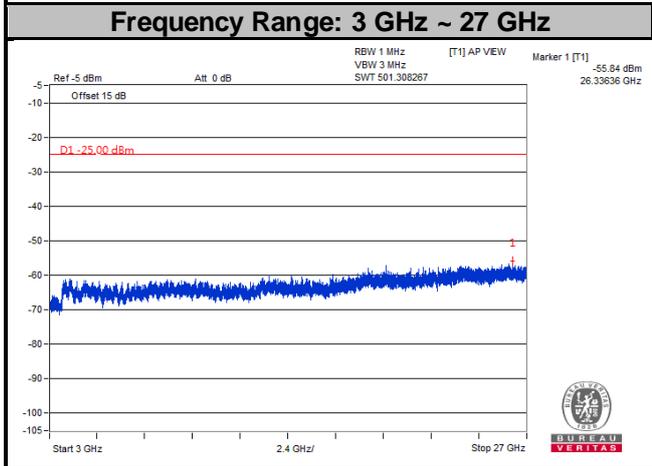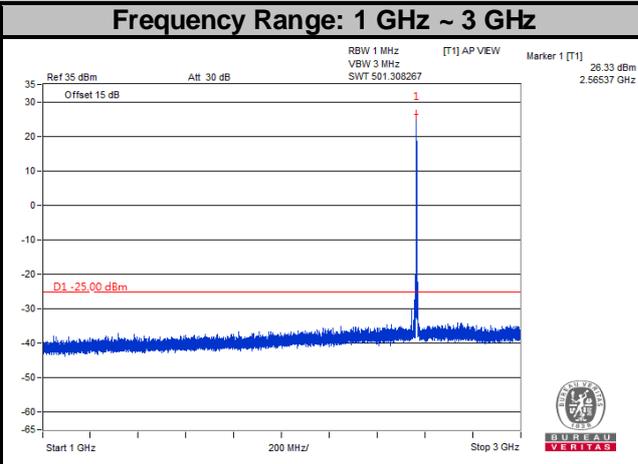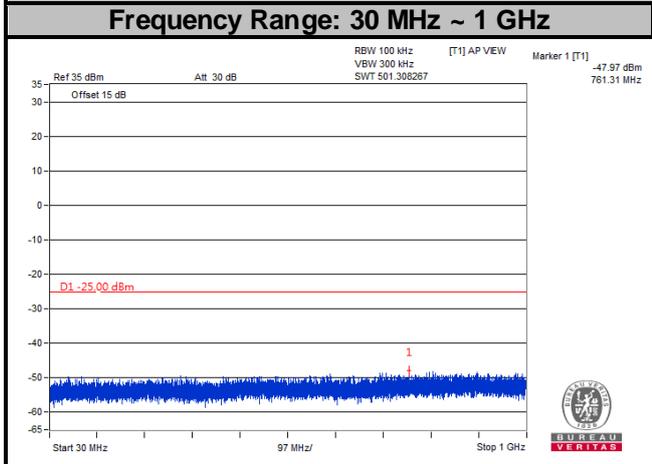




LTE Band 7
Channel Bandwidth: 10 MHz
Channel 20800

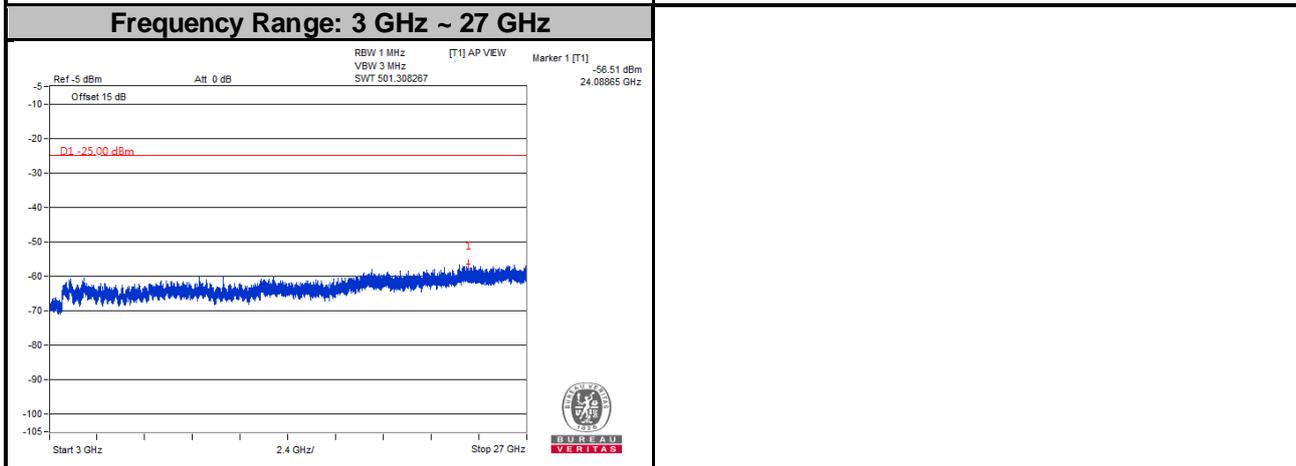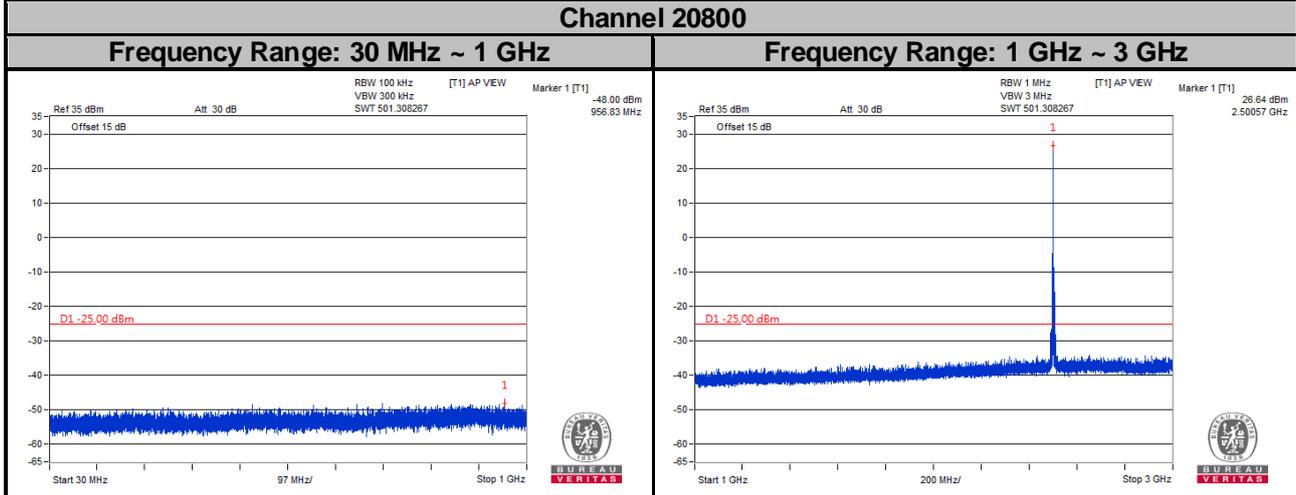




LTE Band 7
Channel Bandwidth: 10 MHz
Channel 21100

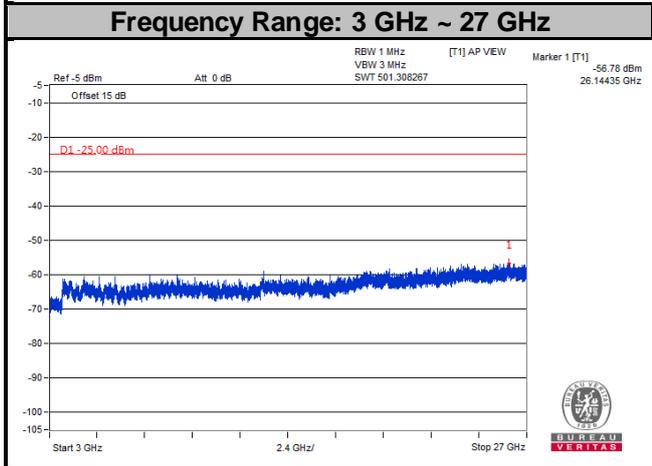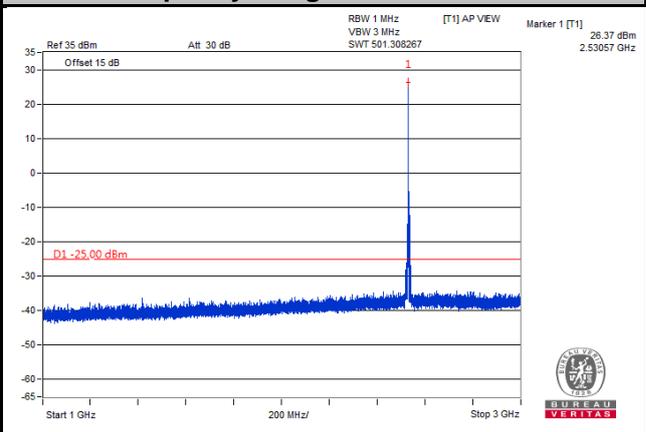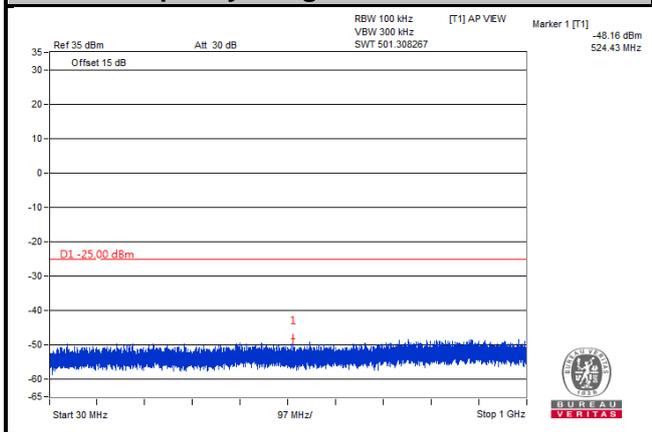




LTE Band 7
Channel Bandwidth: 10 MHz
Channel 21400

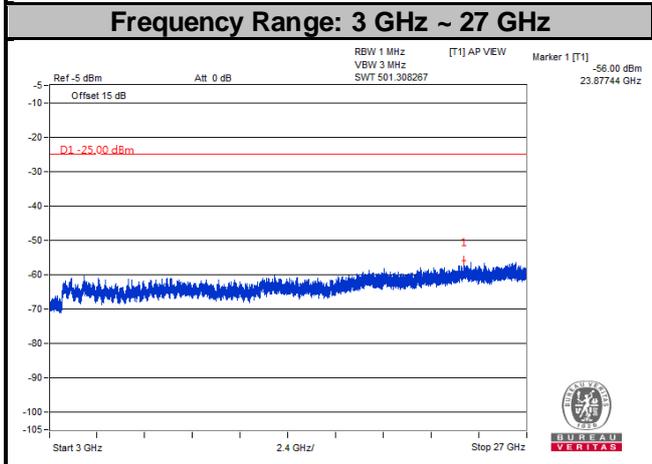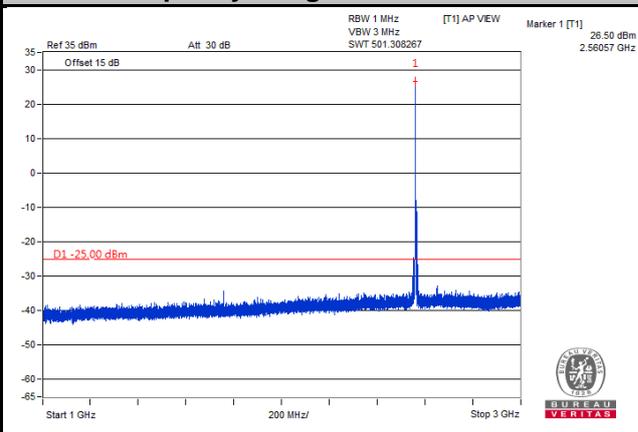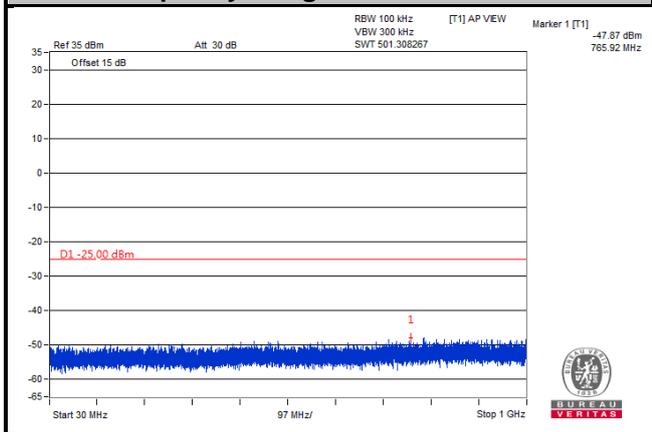




LTE Band 7
Channel Bandwidth: 15 MHz
Channel 20825

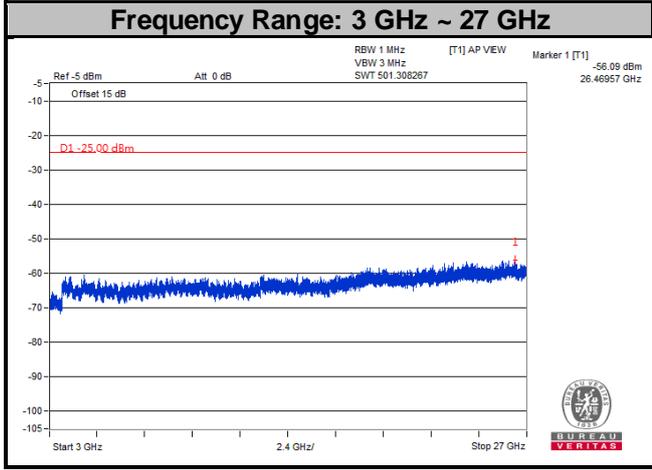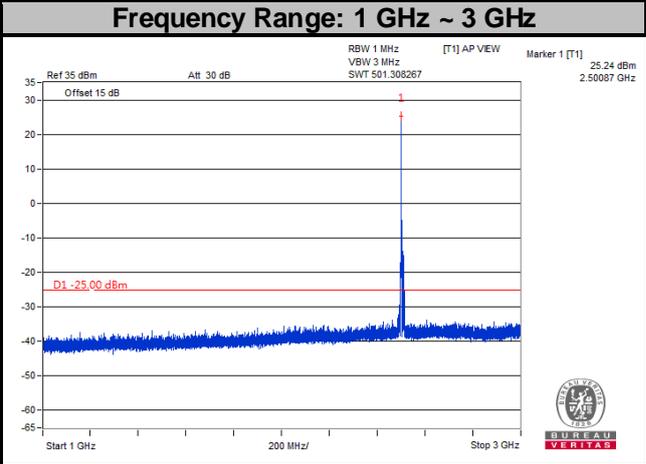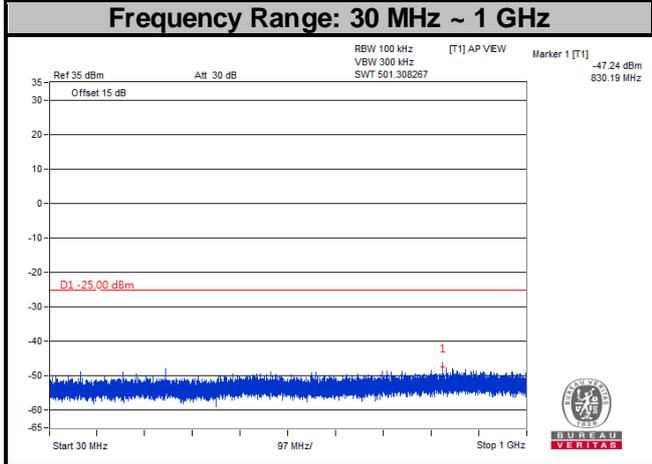




LTE Band 7
Channel Bandwidth: 15 MHz
Channel 21375

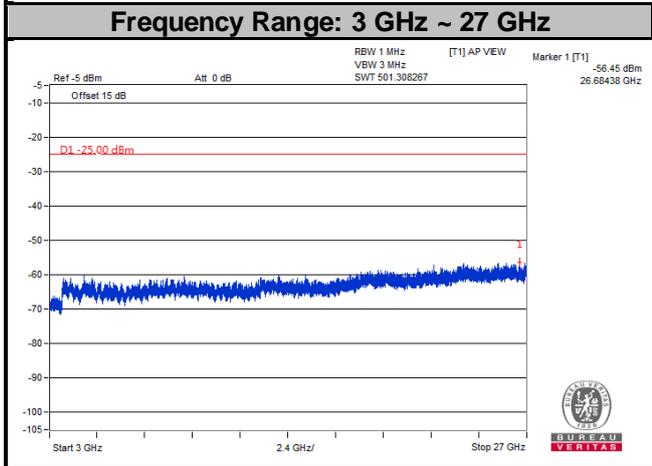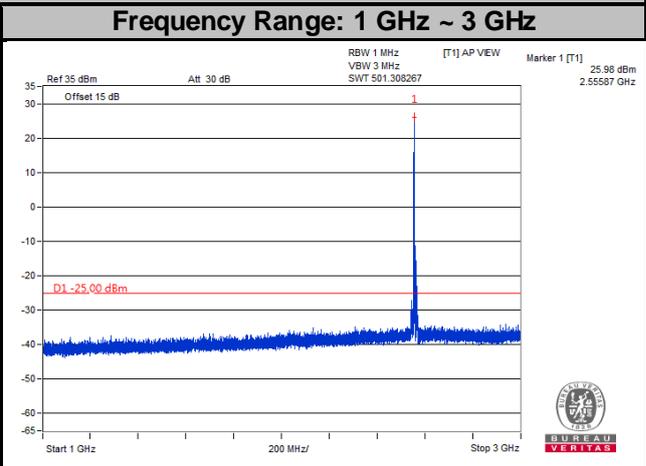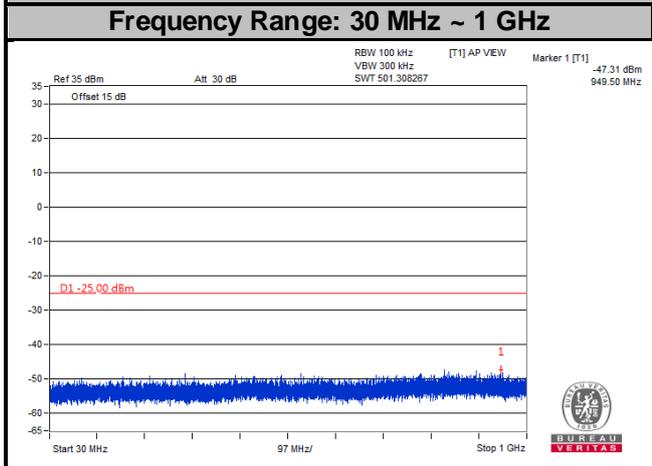




LTE Band 7
Channel Bandwidth: 20 MHz
Channel 20850

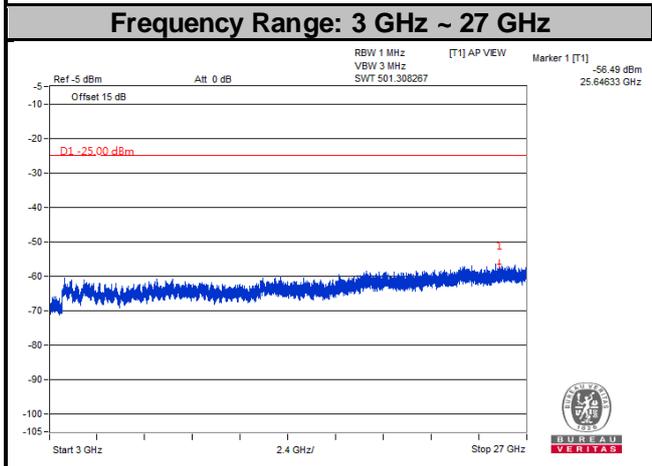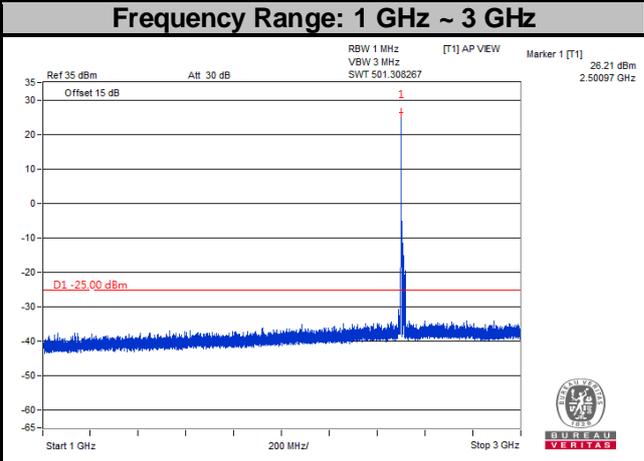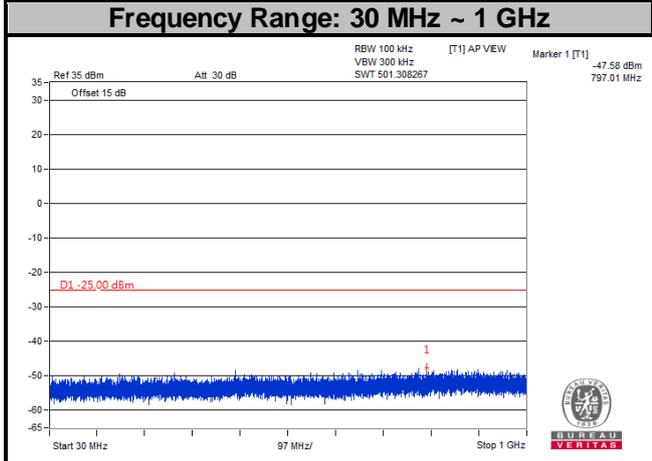




LTE Band 7
Channel Bandwidth: 20 MHz
Channel 21100

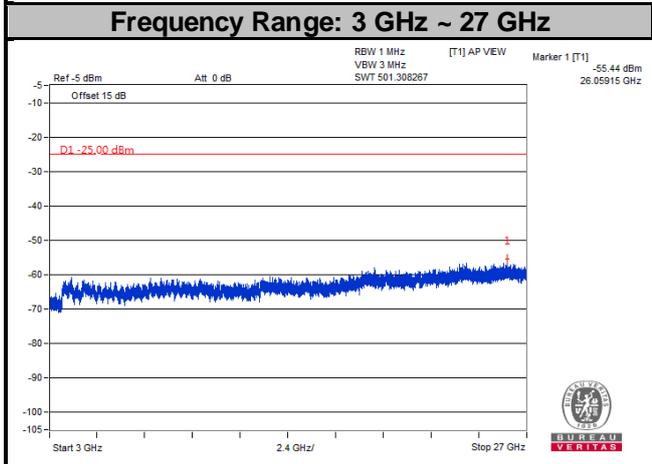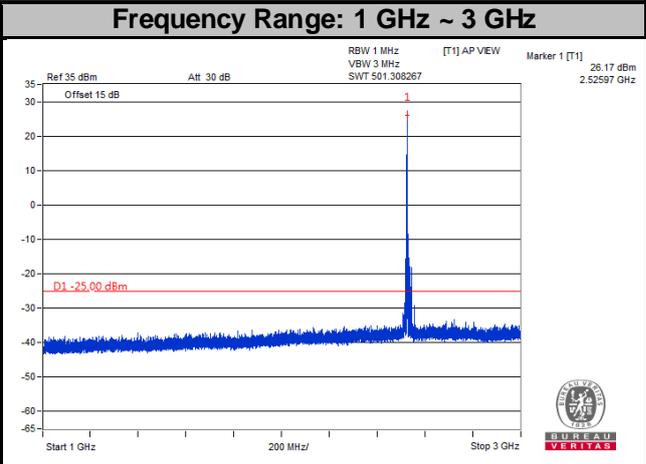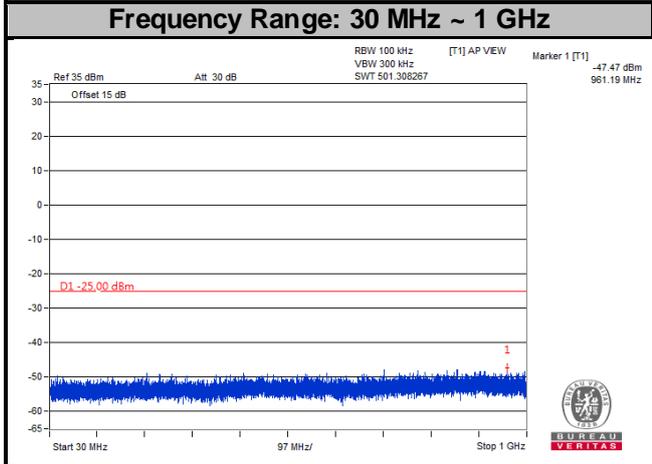




LTE Band 7
Channel Bandwidth: 20 MHz
Channel 21350

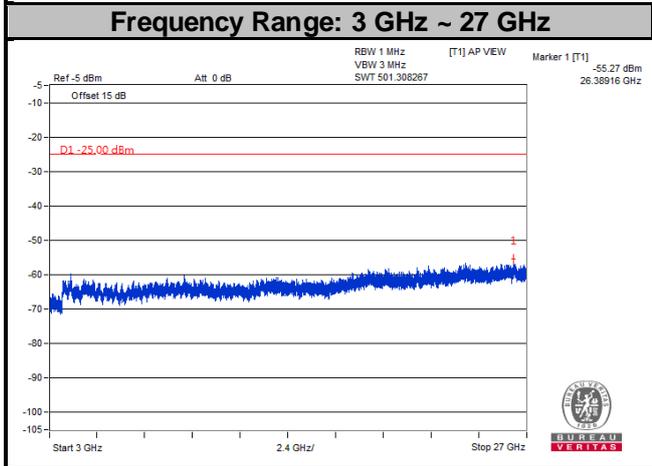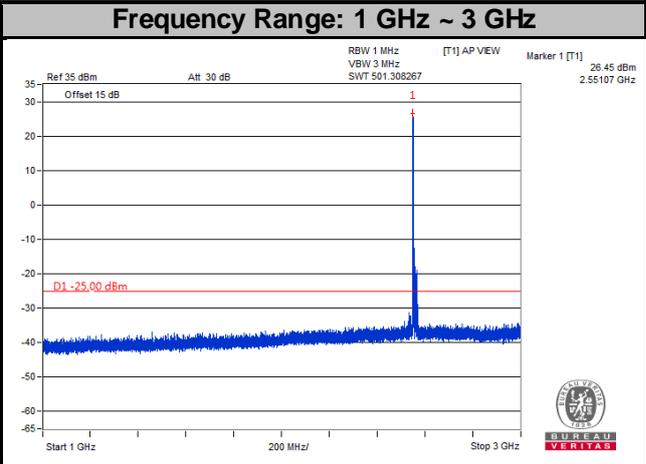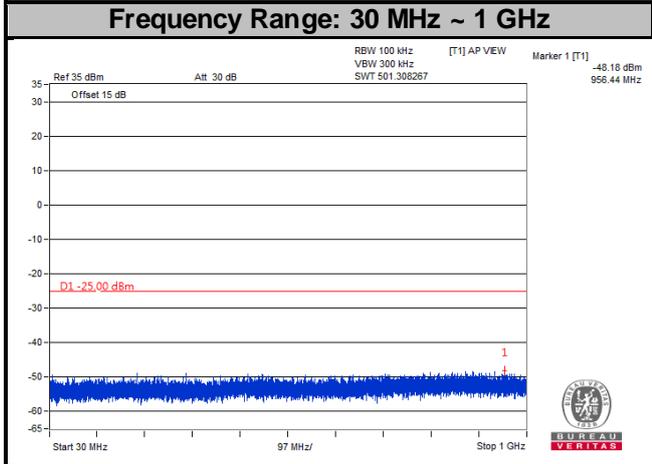




LTE Band 41
Channel Bandwidth: 5 MHz
Channel 39675

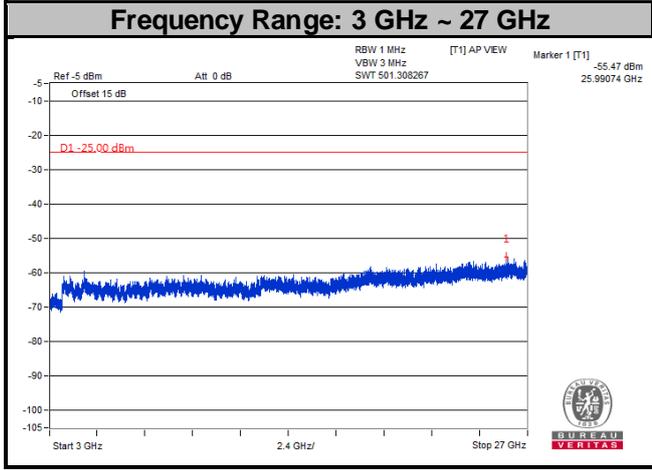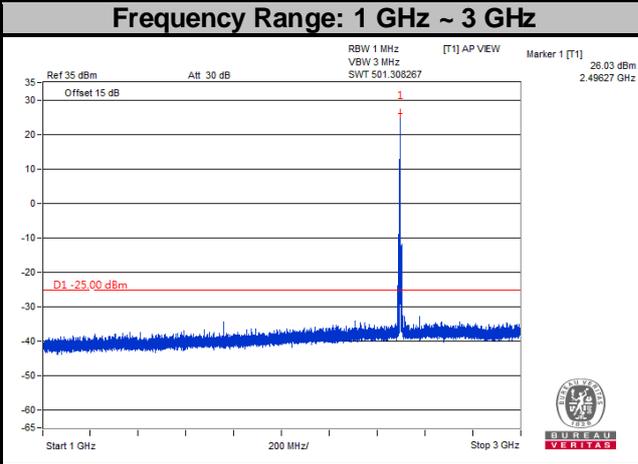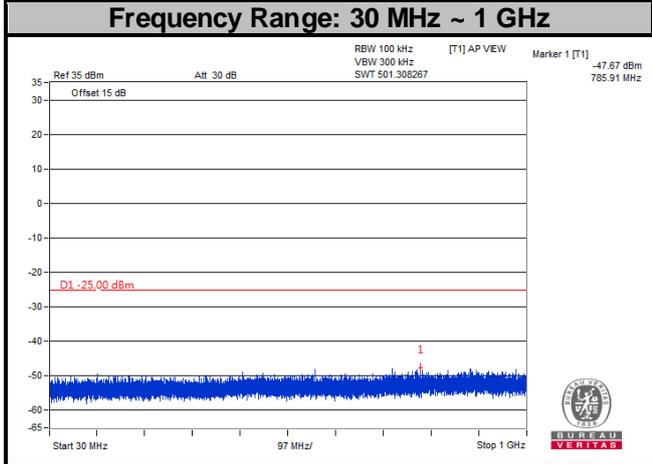




LTE Band 41
Channel Bandwidth: 5 MHz
Channel 40620

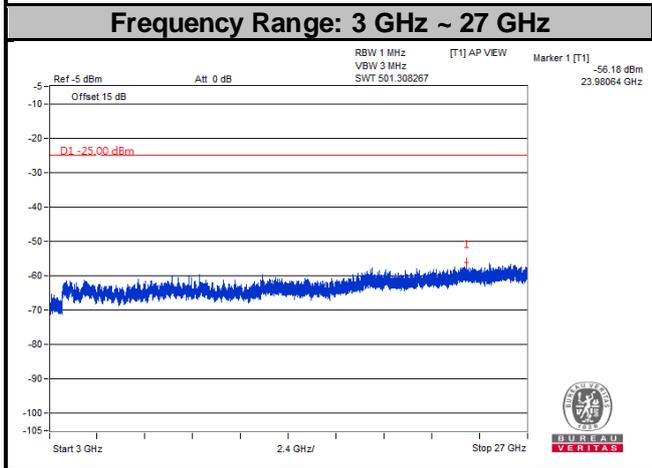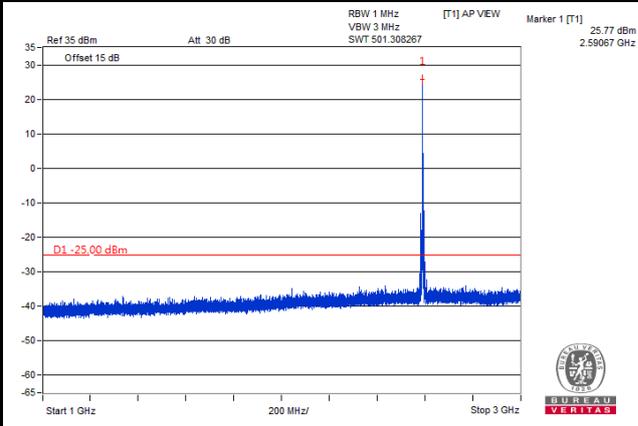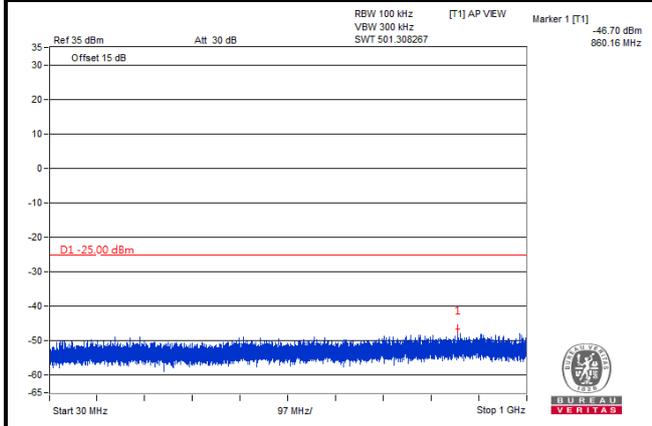




LTE Band 41
Channel Bandwidth: 5 MHz
Channel 41565

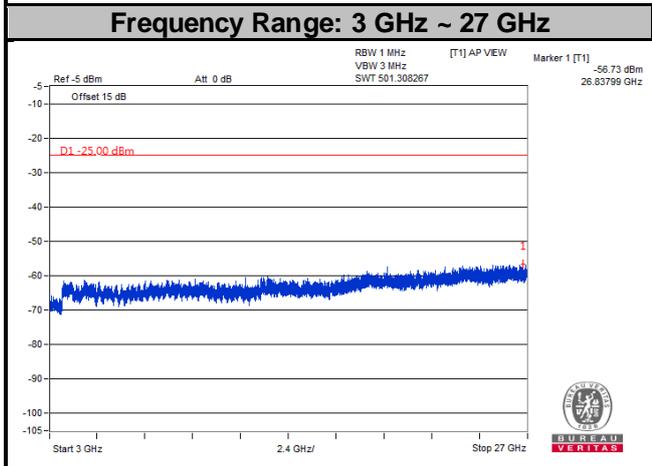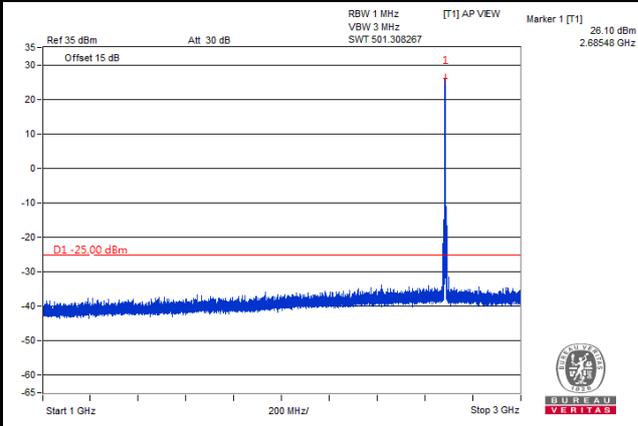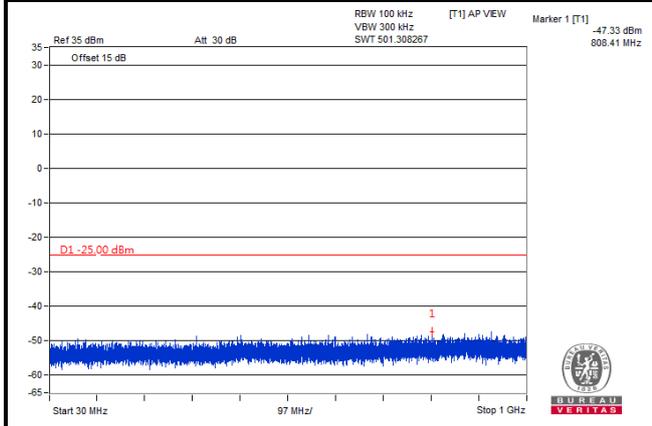




LTE Band 41
Channel Bandwidth: 10 MHz
Channel 39700

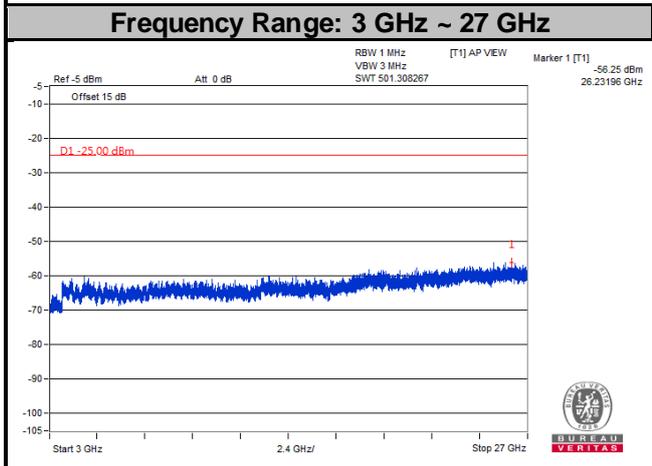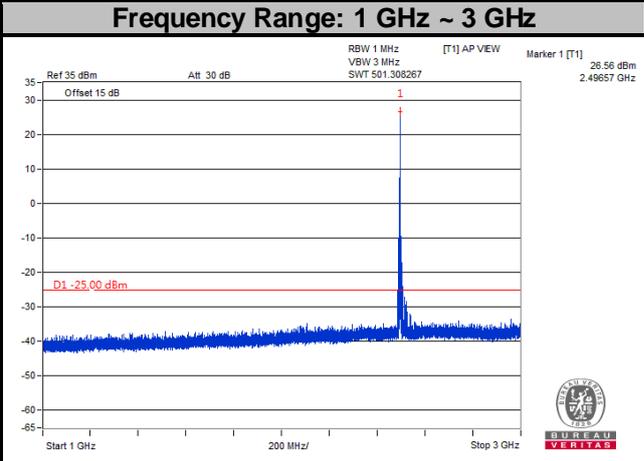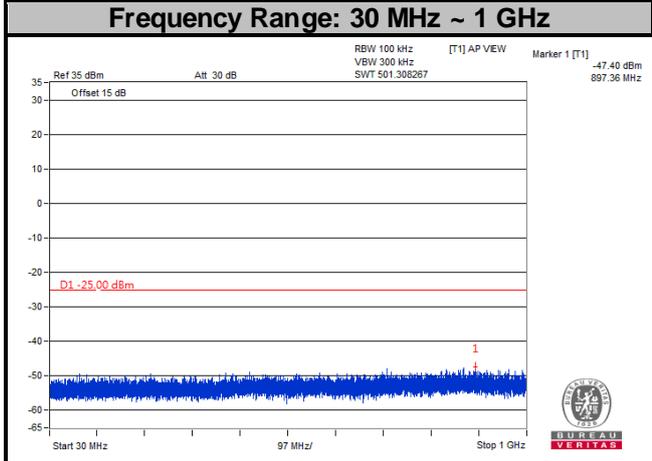




LTE Band 41
Channel Bandwidth: 10 MHz
Channel 40620

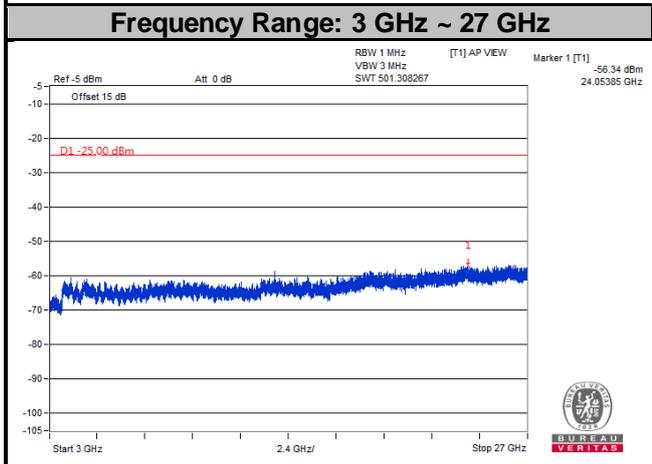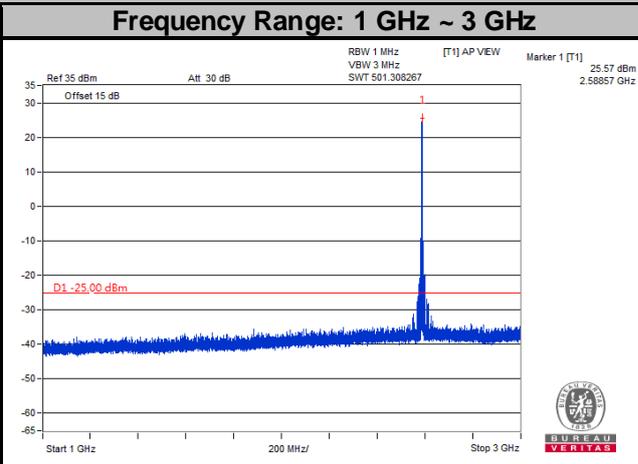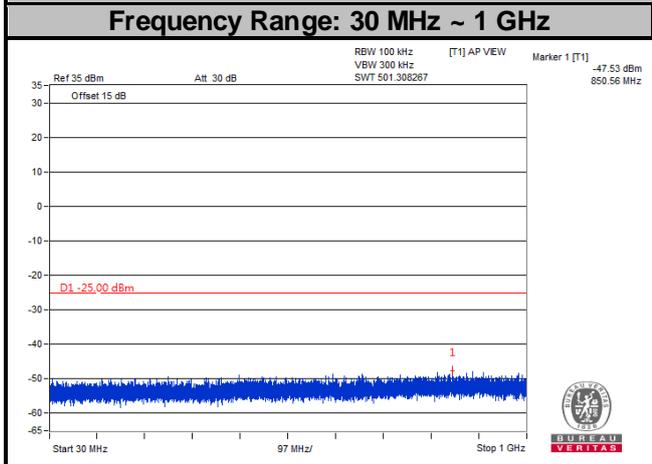




LTE Band 41
Channel Bandwidth: 10 MHz
Channel 41540

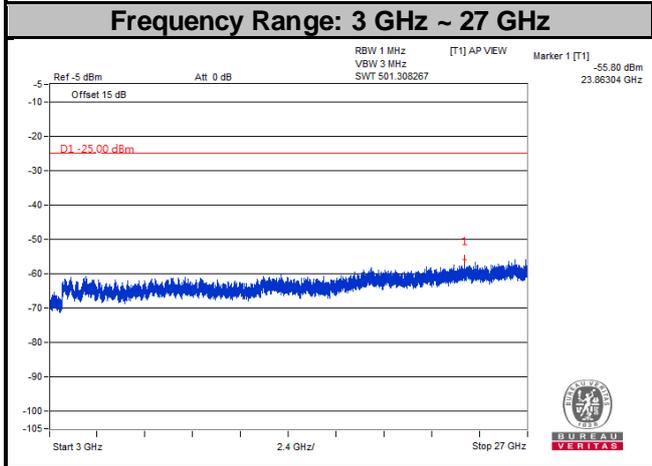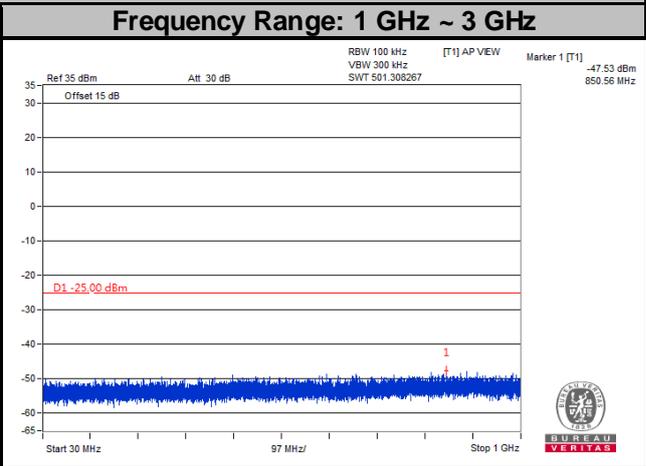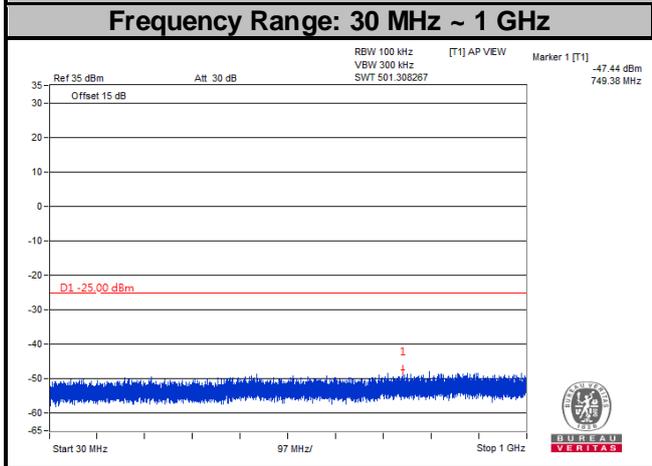




LTE Band 41
Channel Bandwidth: 15 MHz
Channel 39725

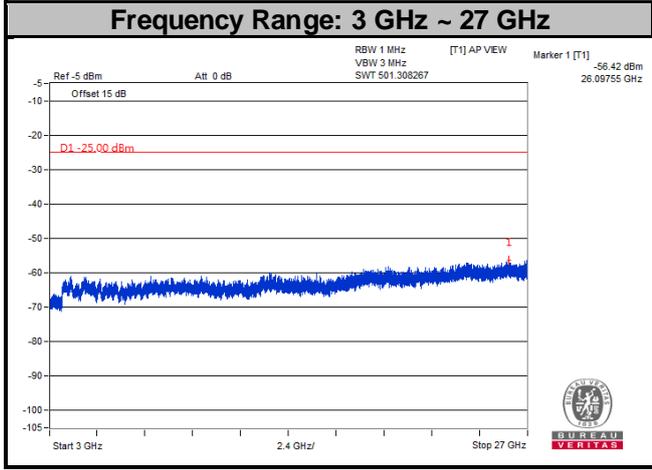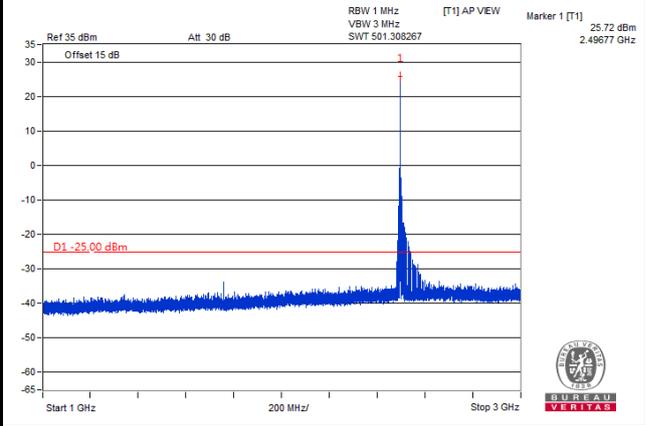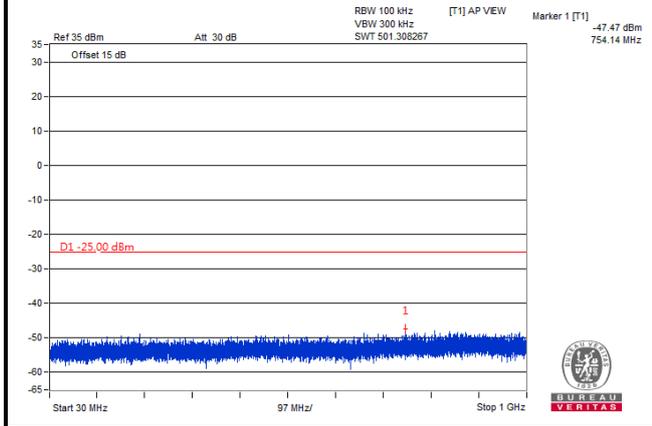




LTE Band 41
Channel Bandwidth: 15 MHz
Channel 40620

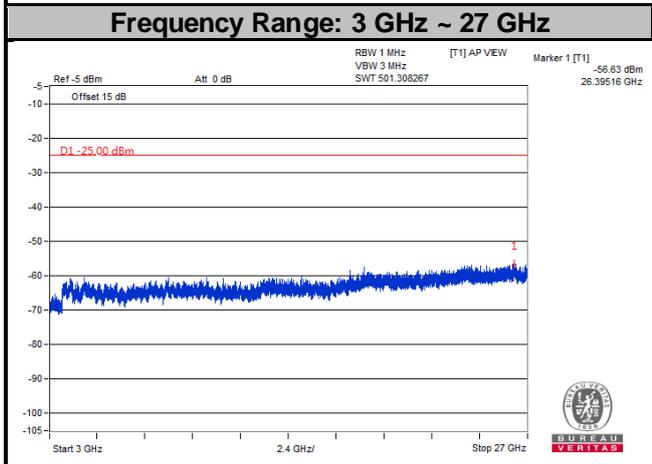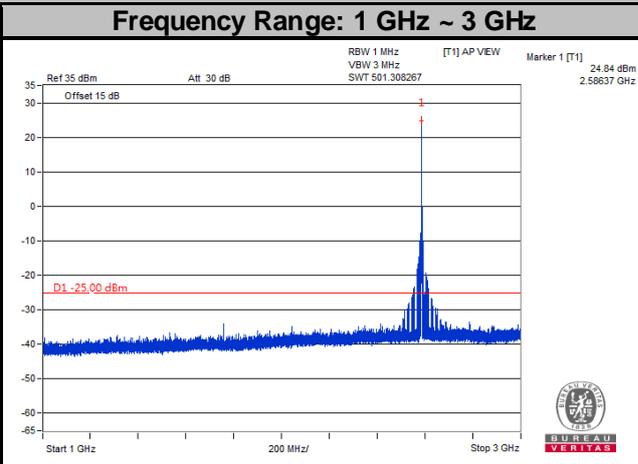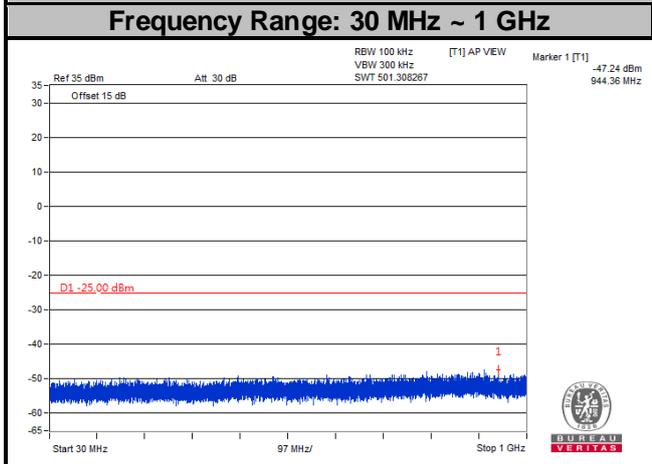




LTE Band 41
Channel Bandwidth: 15 MHz
Channel 41515

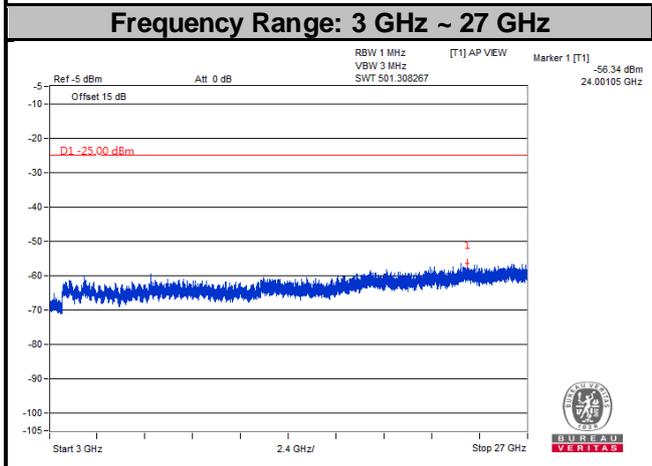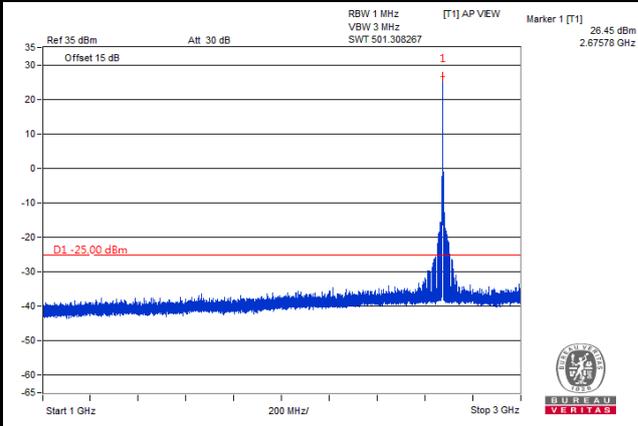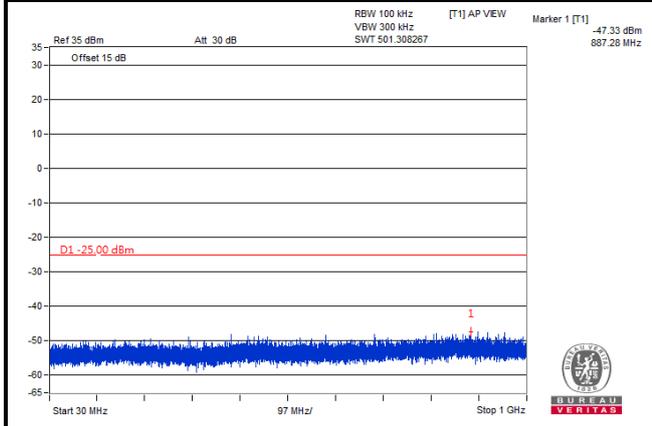




LTE Band 41
Channel Bandwidth: 20 MHz
Channel 39750

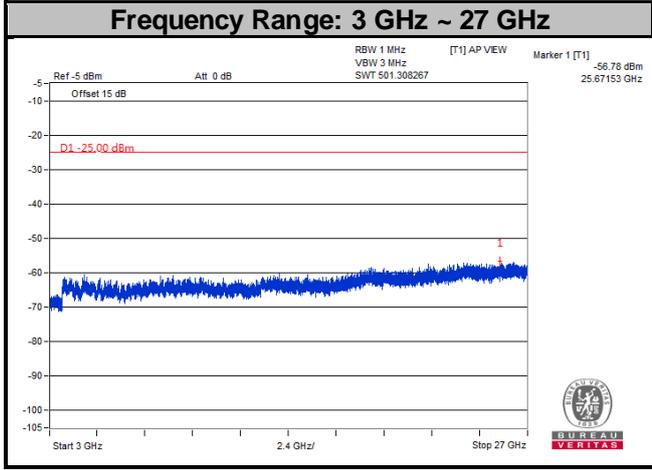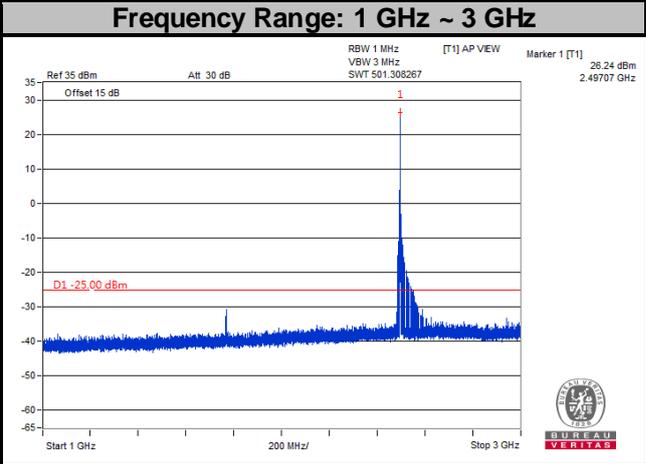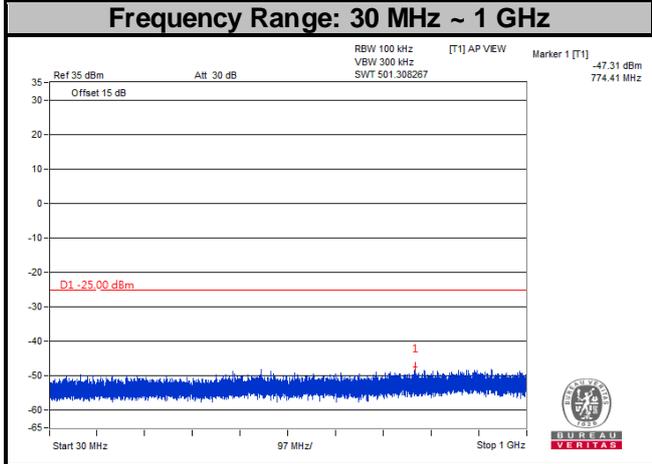

LTE Band 41
Channel Bandwidth: 20 MHz
Channel 40620

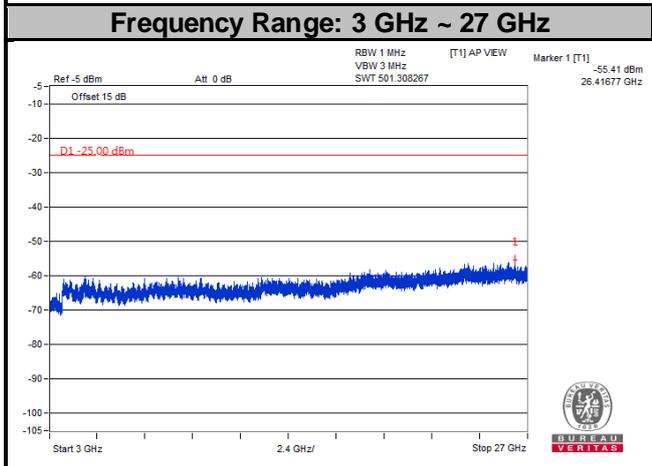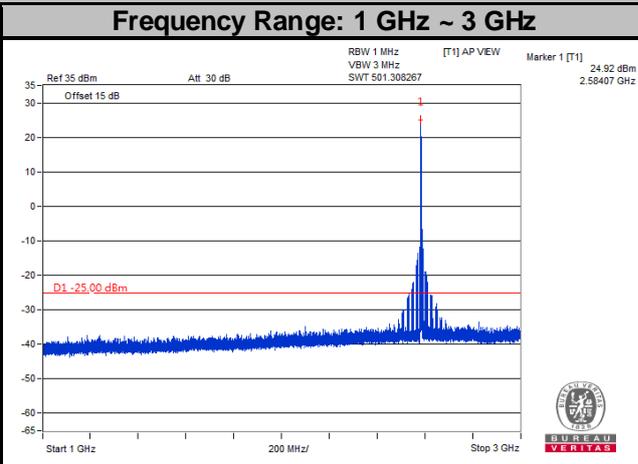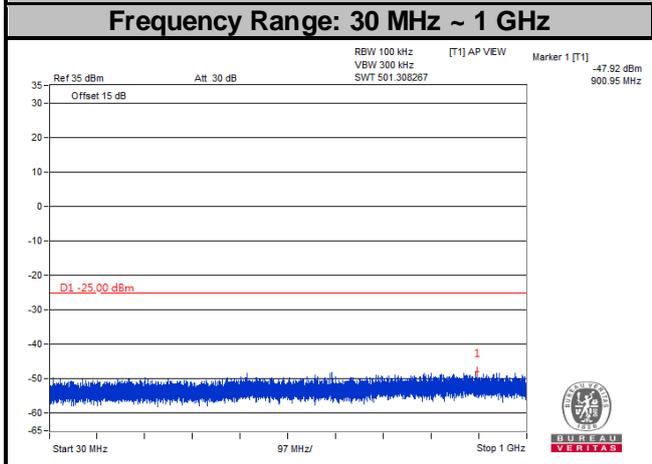

LTE Band 41
Channel Bandwidth: 20 MHz
Channel 41490

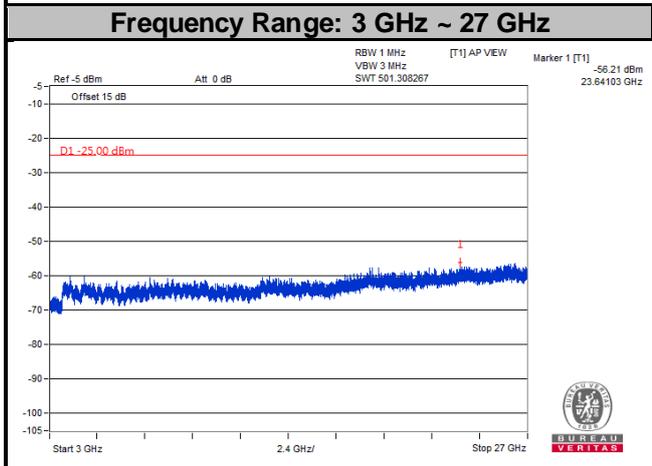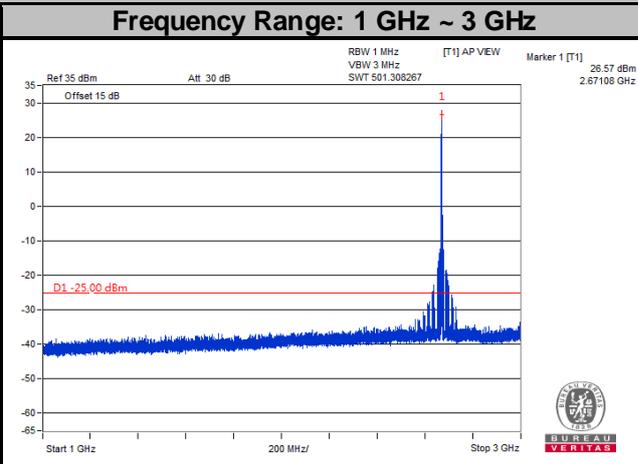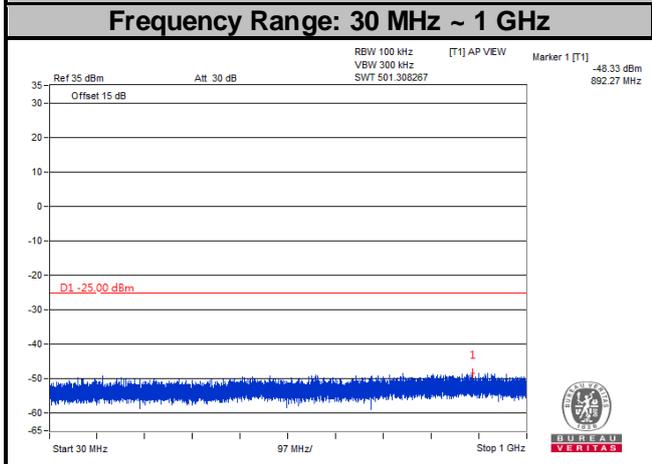

4.7 Radiated Emission Measurement

4.7.1 Limits of Radiated Emission Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -25 dBm.

4.7.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- c. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15 \text{ dB}$.


NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

4.7.3 Deviation from Test Standard


No deviation.

4.7.4 Test Setup

<Radiated Emission below or equal 1 GHz>

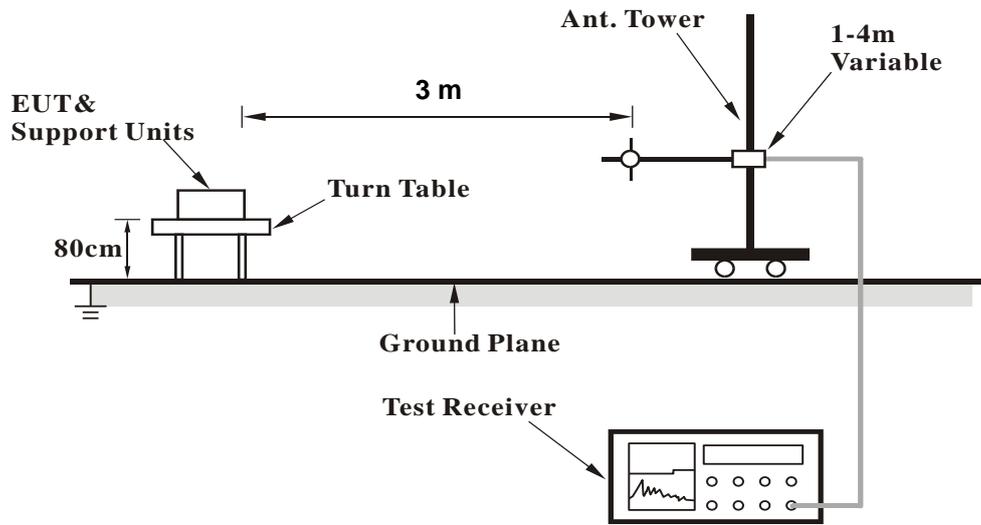

<Radiated Emission above 1 GHz>

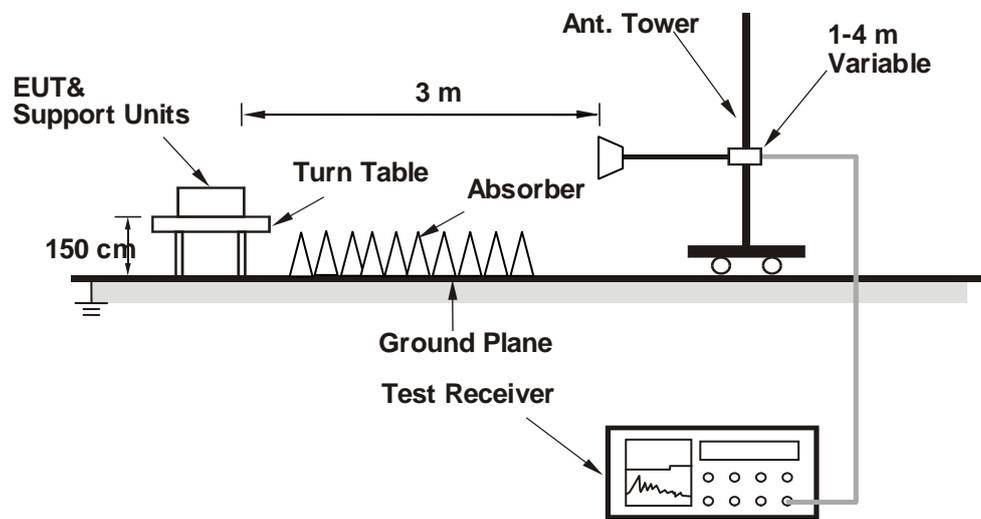

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.7.5 Test Results

LTE Band 7

Channel Bandwidth: 5 MHz / QPSK


Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

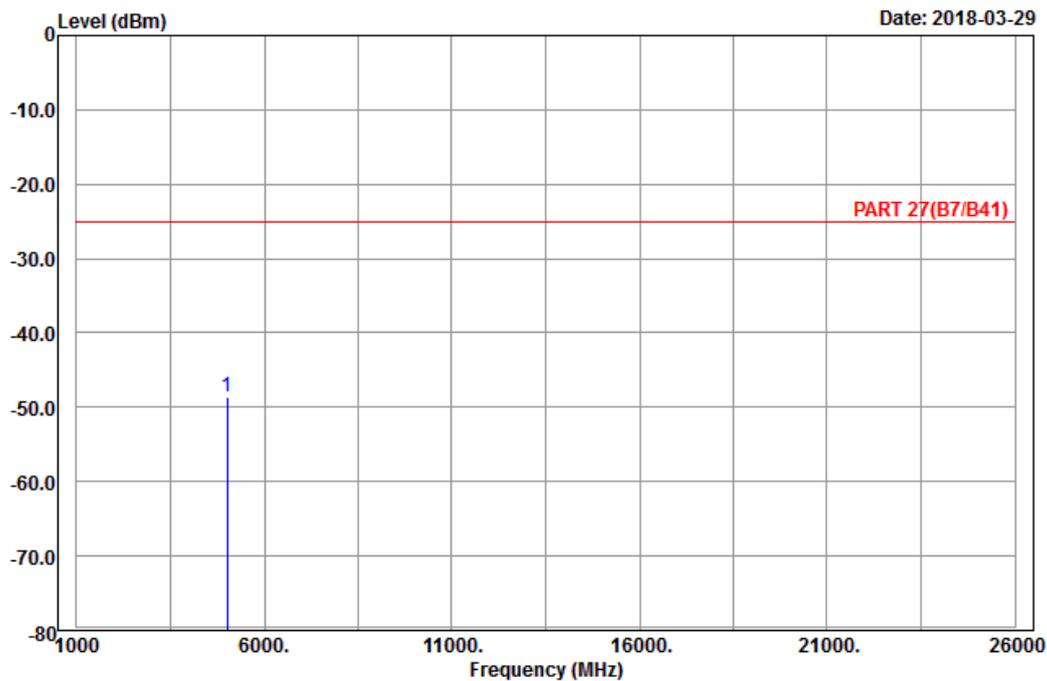

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Horizontal
 Remark : LTE_Band 7_Link_CH20775
 Tested by: Charles Hsiao


Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5005.00	-48.66	-68.24	-25.00	-23.66	19.58	Peak



A D T

Data: 10

Date: 2018-03-29

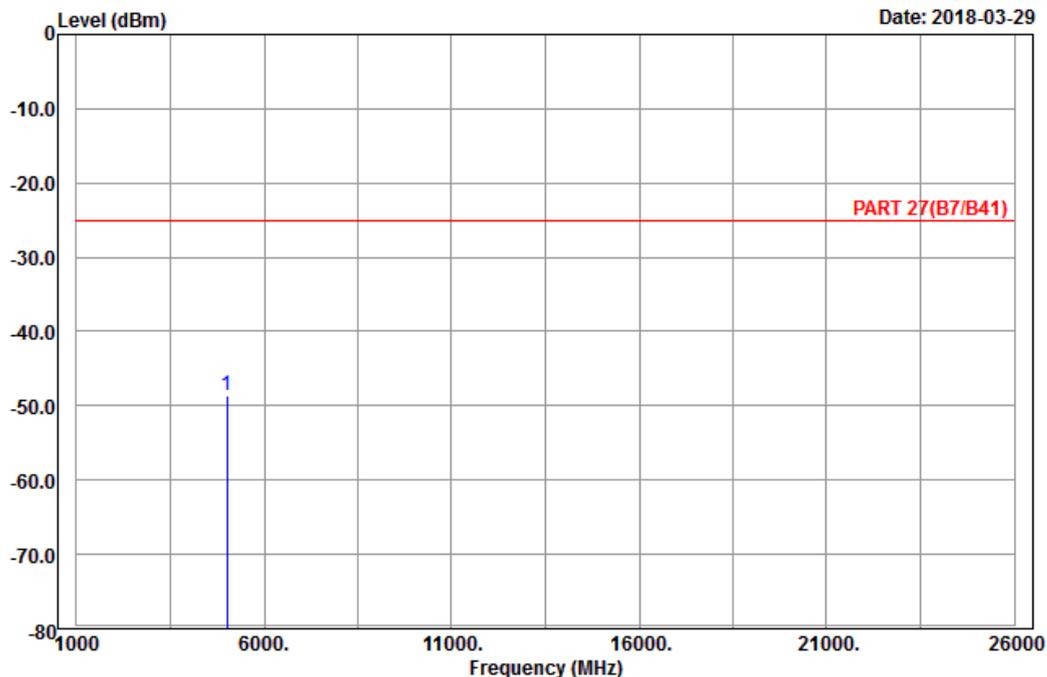

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Vertical
 Remark : LTE_Band 7_Link_CH20775
 Tested by: Charles Hsiao

Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5005.00	-48.56	-68.14	-25.00	-23.56	19.58	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2018-03-29

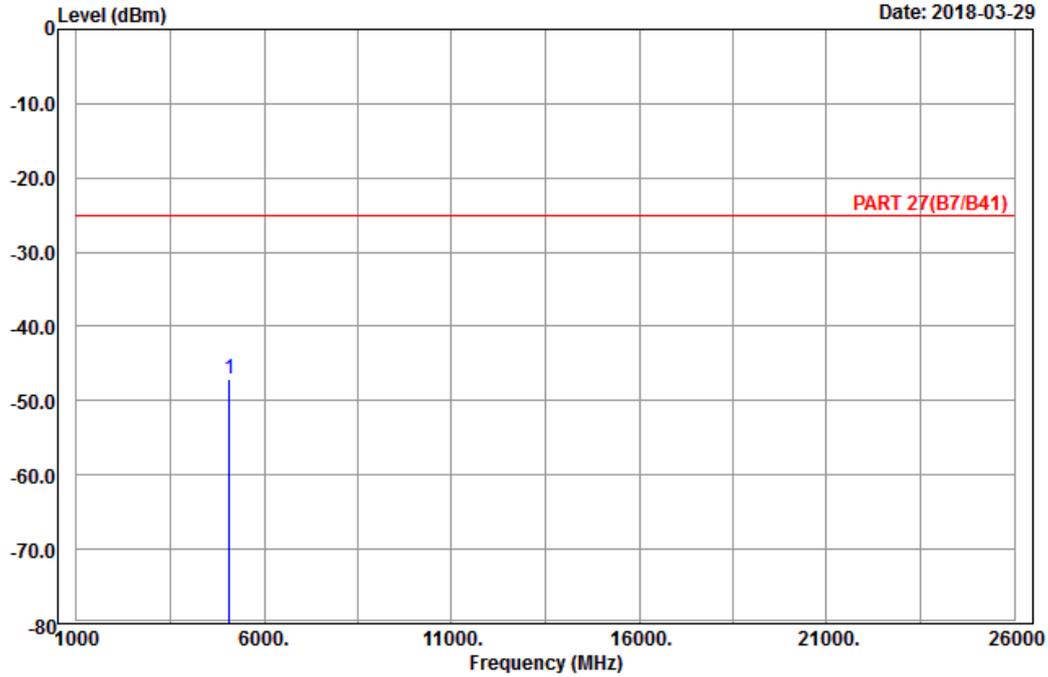

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Horizontal
 Remark : LTE_Band 7_Link_CH21100
 Tested by: Charles Hsiao

Freq	Level	Read Level	Limit	Over	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5070.00	-47.06	-66.45	-25.00	-22.06	19.39	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-03-29

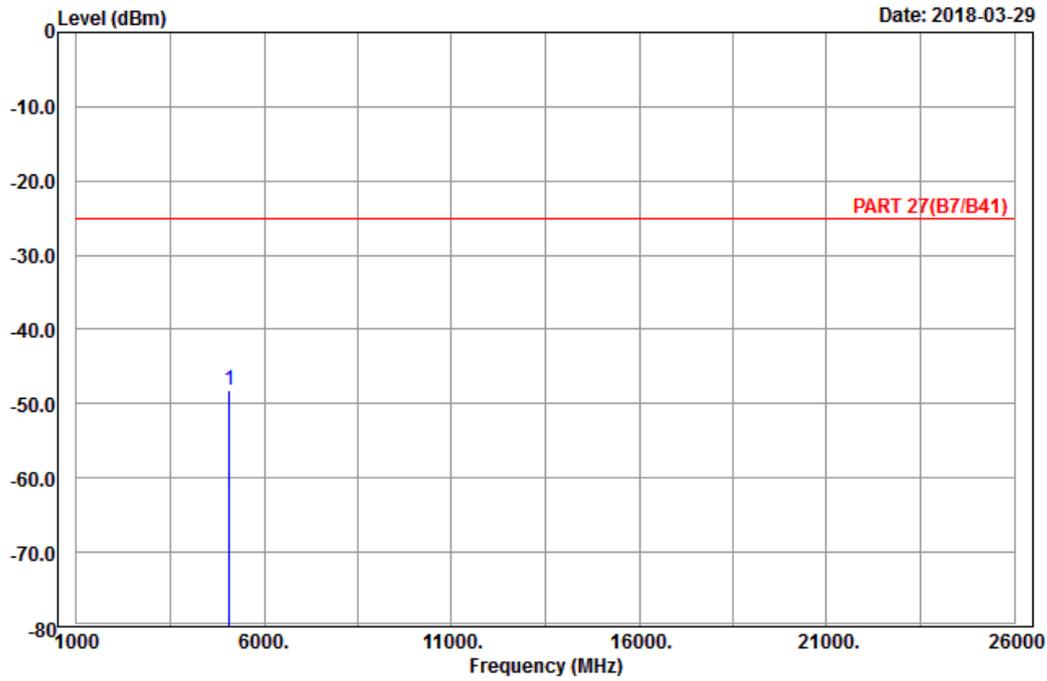

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Vertical
 Remark : LTE_Band 7_Link_CH21100
 Tested by: Charles Hsiao

Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5070.00	-48.16	-67.55	-25.00	-23.16	19.39	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2018-03-29

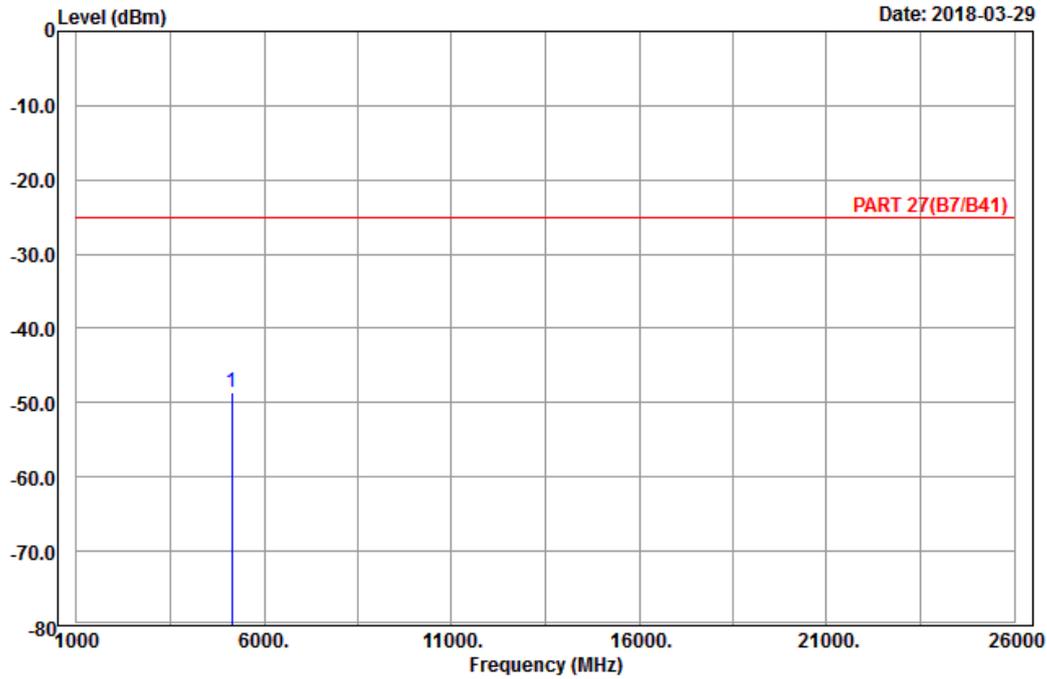

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Horizontal
 Remark : LTE_Band 7_Link_CH21425
 Tested by: Charles Hsiao

Freq	Level	Read Level	Limit	Over	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5135.00	-48.60	-68.41	-25.00	-23.60	19.81	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-03-29

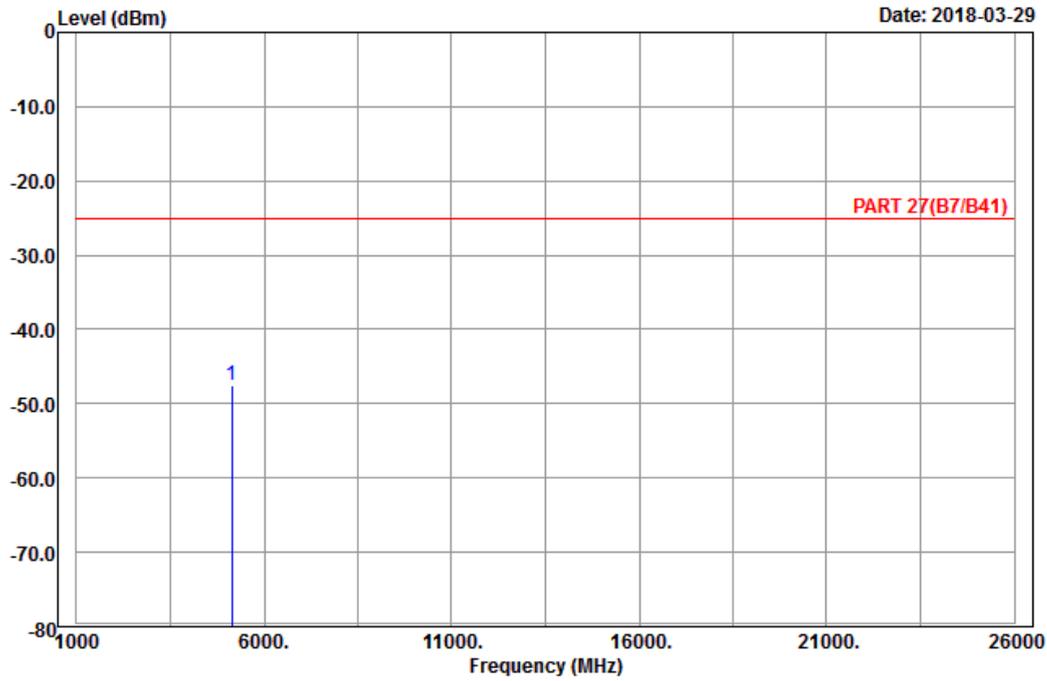

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Vertical
 Remark : LTE_Band 7_Link_CH21425
 Tested by: Charles Hsiao

Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5135.00	-47.60	-67.41	-25.00	-22.60	19.81	Peak


Channel Bandwidth: 20 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

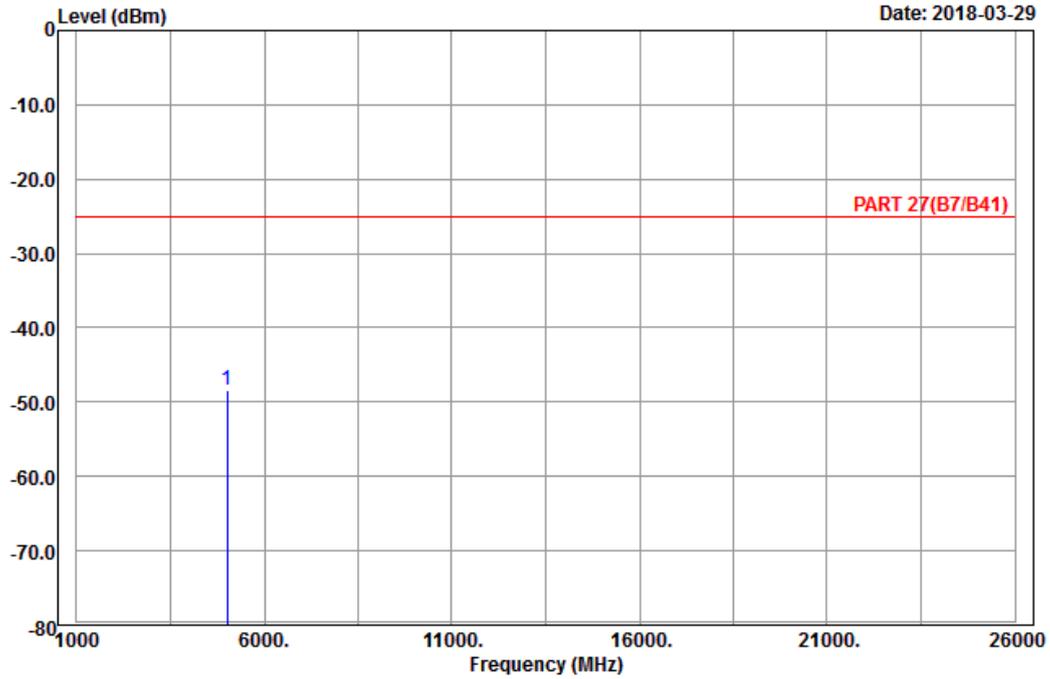

Site : 966 chamber 1
Condition: PART 27(B7/B41) Horizontal
Remark : LTE_Band 7_Link_CH20850
Tested by: Charles Hsiao


	Read	Limit	Over			
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5020.00	-48.31	-67.39	-25.00	-23.31	19.08	Peak



A D T

Data: 10

Date: 2018-03-29

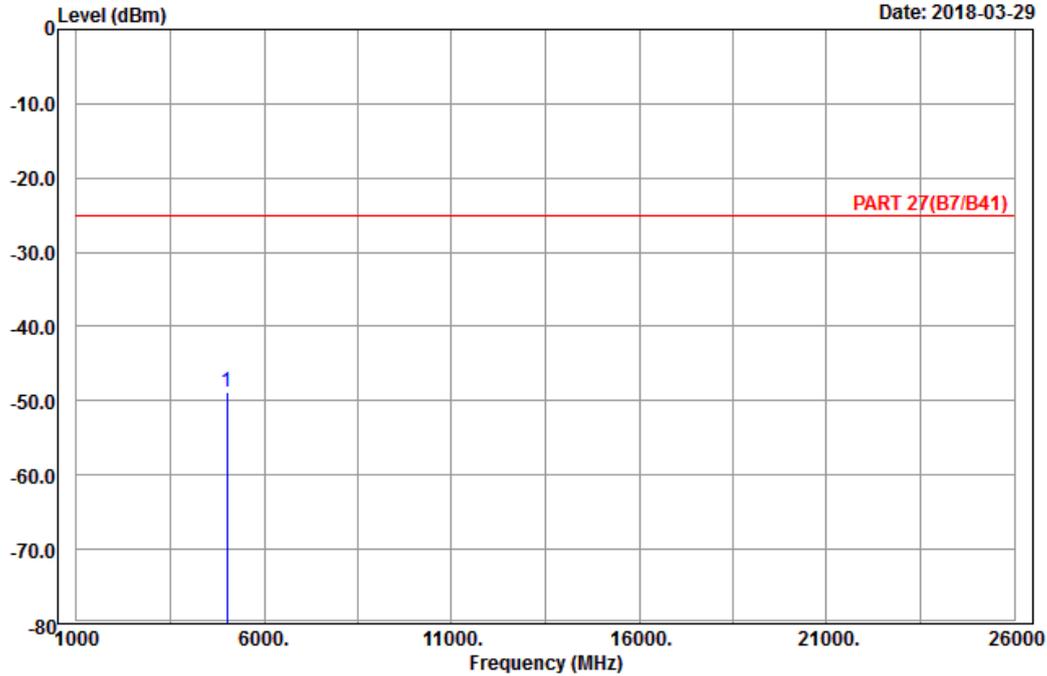

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Vertical
 Remark : LTE_Band 7_Link_CH20850
 Tested by: Charles Hsiao

Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5020.00	-48.77	-67.85	-25.00	-23.77	19.08	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 13

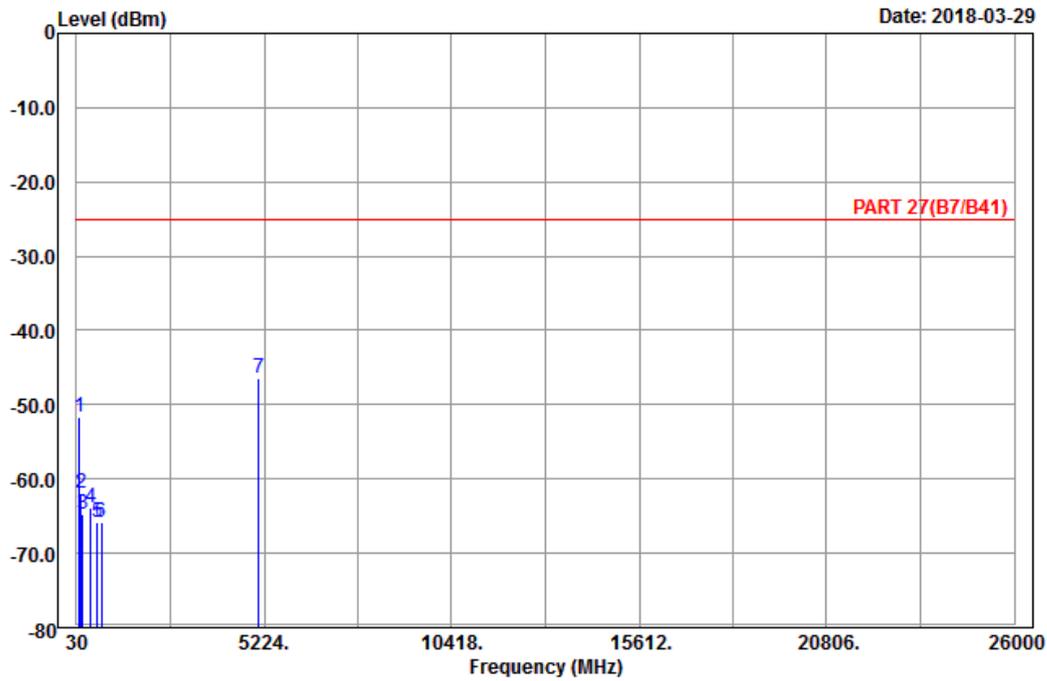

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Horizontal
 Remark : LTE_Band 7_Link_CH21100
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	106.14	-51.62	-42.20	-25.00	-26.62	-9.42	Peak
2	152.85	-61.94	-54.08	-25.00	-36.94	-7.86	Peak
3	203.61	-64.72	-58.59	-25.00	-39.72	-6.13	Peak
4	431.60	-63.80	-60.36	-25.00	-38.80	-3.44	Peak
5	603.10	-65.72	-66.11	-25.00	-40.72	0.39	Peak
6	725.60	-65.85	-65.00	-25.00	-40.85	-0.85	Peak
7 pp	5070.00	-46.33	-65.72	-25.00	-21.33	19.39	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 14

Date: 2018-03-29

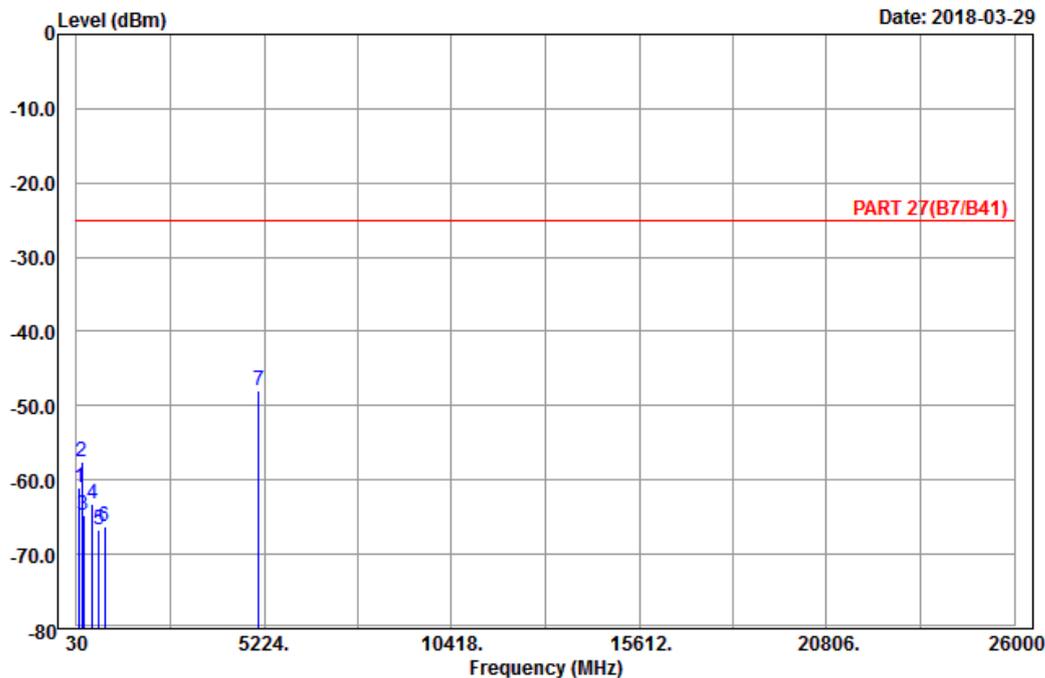

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Vertical
 Remark : LTE_Band 7_Link_CH21100
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	99.39	-60.95	-50.83	-25.00	-35.95	-10.12	Peak
2	173.91	-57.63	-51.33	-25.00	-32.63	-6.30	Peak
3	213.06	-64.75	-58.75	-25.00	-39.75	-6.00	Peak
4	459.60	-63.18	-59.06	-25.00	-38.18	-4.12	Peak
5	654.90	-66.67	-66.51	-25.00	-41.67	-0.16	Peak
6	811.00	-66.17	-68.06	-25.00	-41.17	1.89	Peak
7 pp	5070.00	-47.86	-67.25	-25.00	-22.86	19.39	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2018-03-29

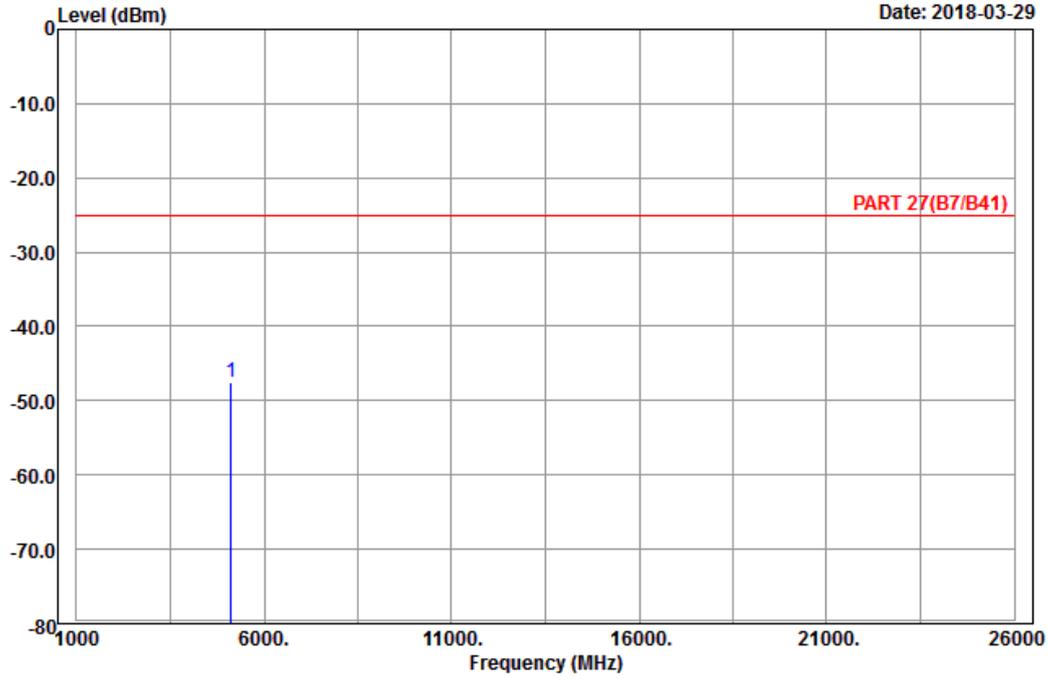

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Horizontal
 Remark : LTE_Band 7_Link_CH21350
 Tested by: Charles Hsiao

	Read	Limit	Over			
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5120.00	-47.60	-67.31	-25.00	-22.60	19.71	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-03-29

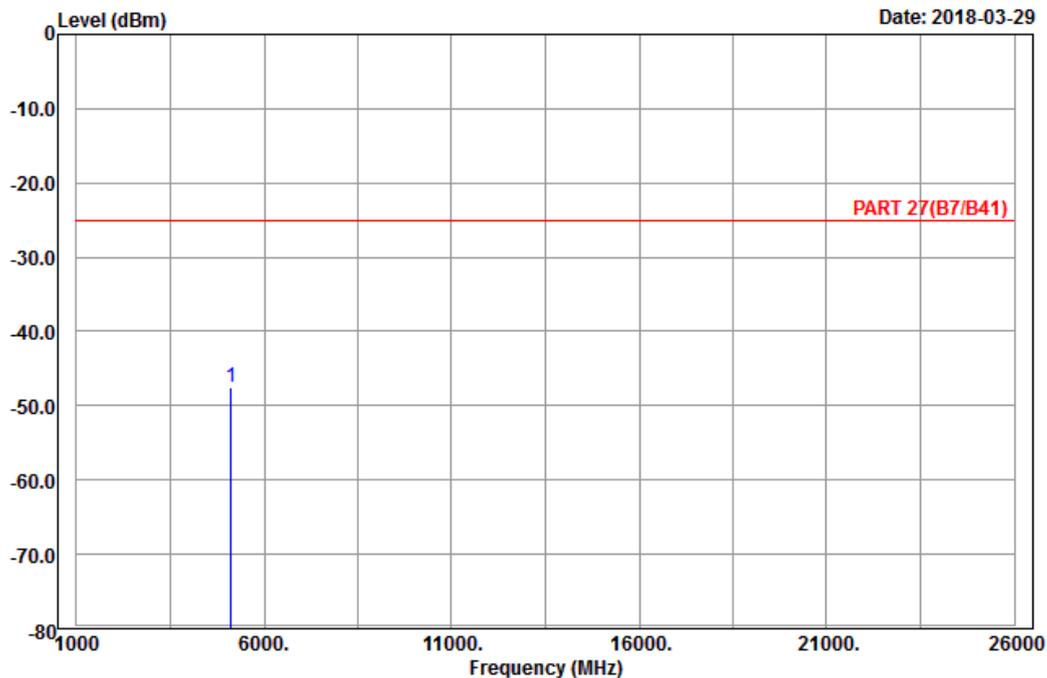

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Vertical
 Remark : LTE_Band 7_Link_CH21350
 Tested by: Charles Hsiao

Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5120.00	-47.57	-67.28	-25.00	-22.57	19.71	Peak


LTE Band 41
Channel Bandwidth: 5 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

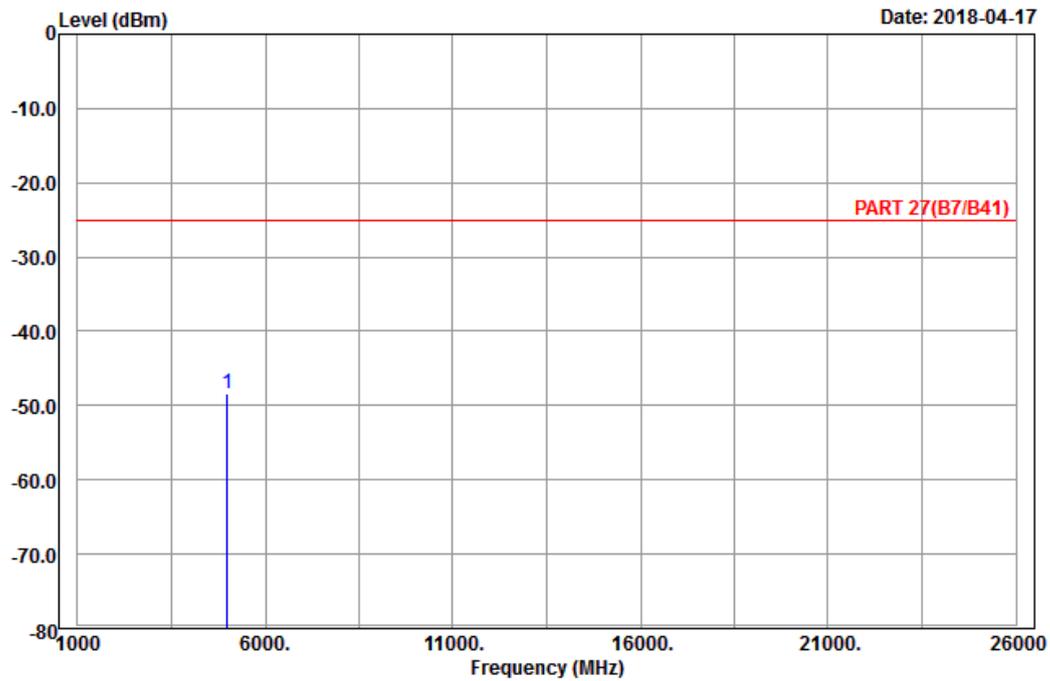

Site : 966 chamber 1
Condition: PART 27(B7/B41) Horizontal
Remark : LTE_Band 41_Link_CH39675
Tested by: Karl Lee


	Read	Limit	Over			
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 4997.00	-48.41	-67.99	-25.00	-23.41	19.58	Peak



A D T

Data: 10

Date: 2018-04-17

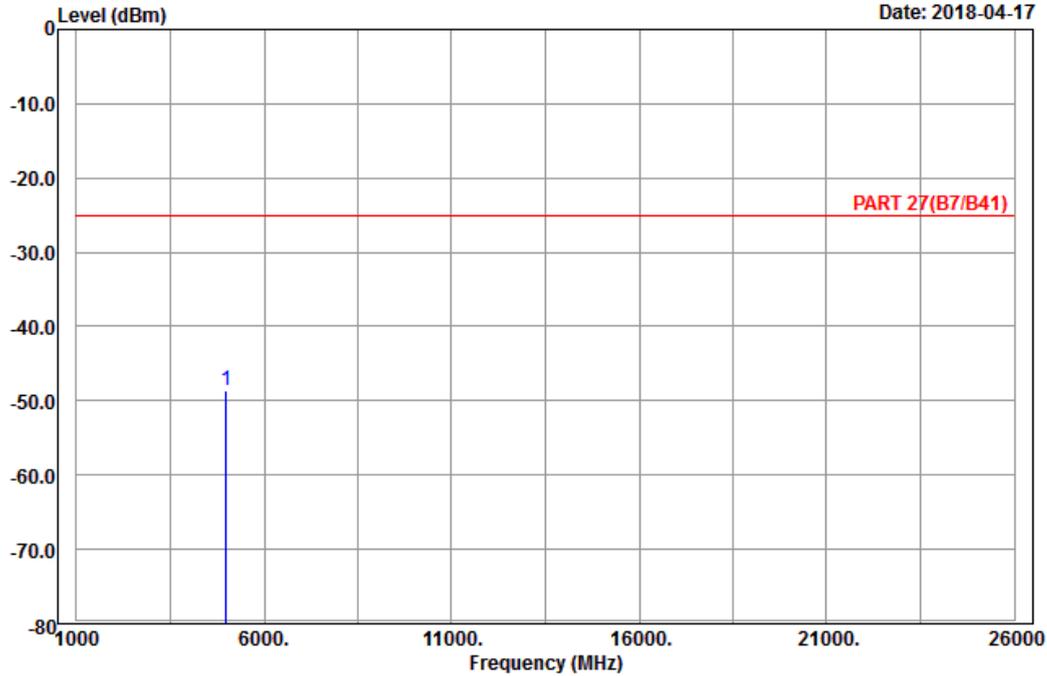

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Vertical
 Remark : LTE_Band 41_Link_CH39675
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	pp 4997.00	-48.55	-68.13	-25.00	-23.55	19.58	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2018-04-17

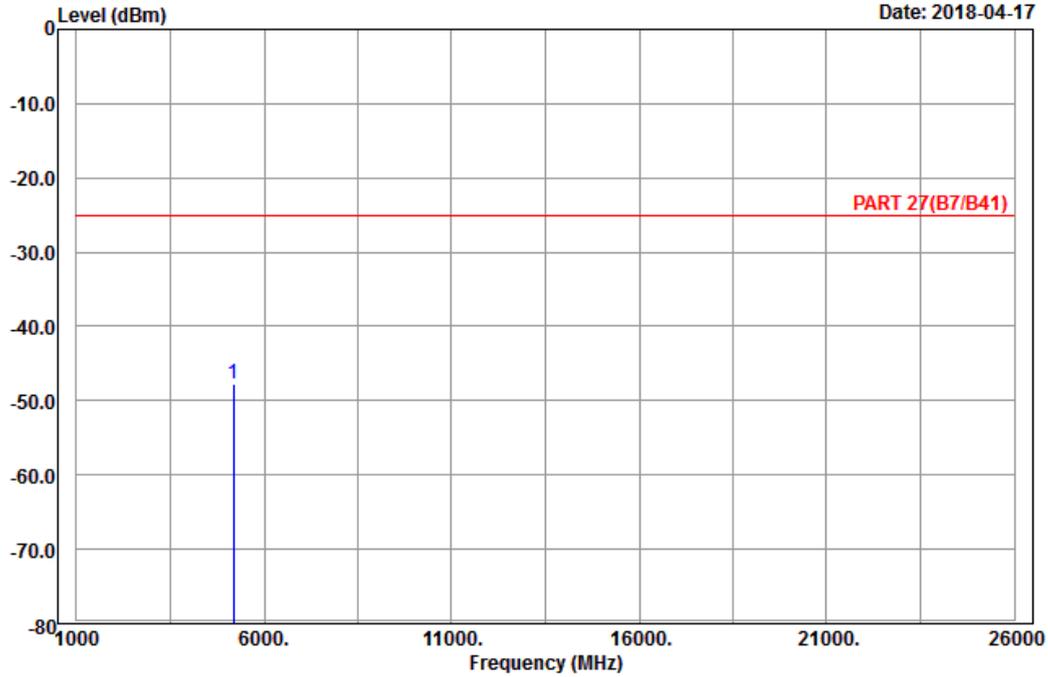

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Horizontal
 Remark : LTE_Band 41_Link_CH40620
 Tested by: Karl Lee

Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5186.00	-47.66	-67.78	-25.00	-22.66	20.12	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-04-17

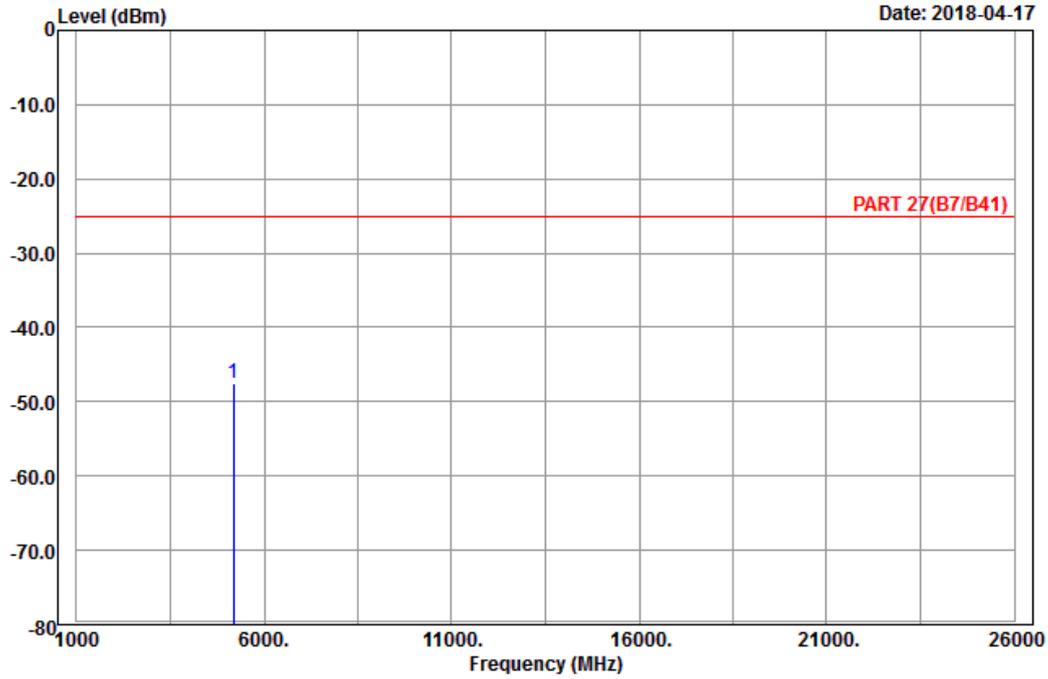

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Vertical
 Remark : LTE_Band 41_Link_CH40620
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	pp 5186.00	-47.45	-67.57	-25.00	-22.45	20.12	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2018-04-17

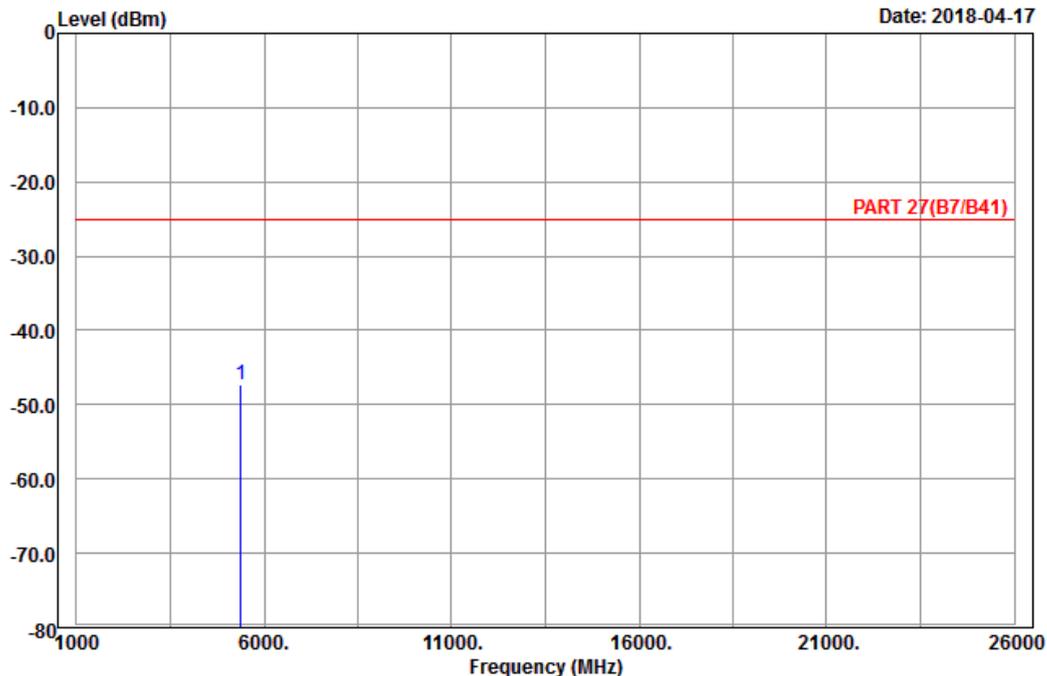

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Horizontal
 Remark : LTE_Band 41_Link_CH41565
 Tested by: Karl Lee

	Read	Limit	Over			
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5375.00	-47.35	-67.67	-25.00	-22.35	20.32	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-04-17

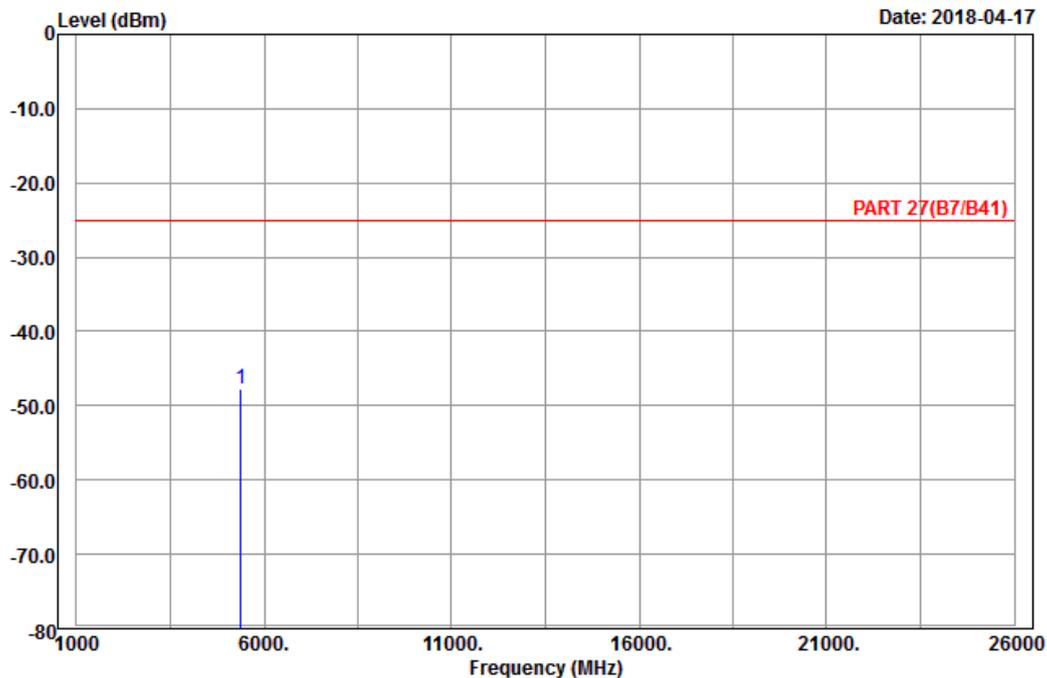

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Vertical
 Remark : LTE_Band 41_Link_CH41565
 Tested by: Karl Lee

Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5375.00	-47.66	-67.98	-25.00	-22.66	20.32	Peak


Channel Bandwidth: 20 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

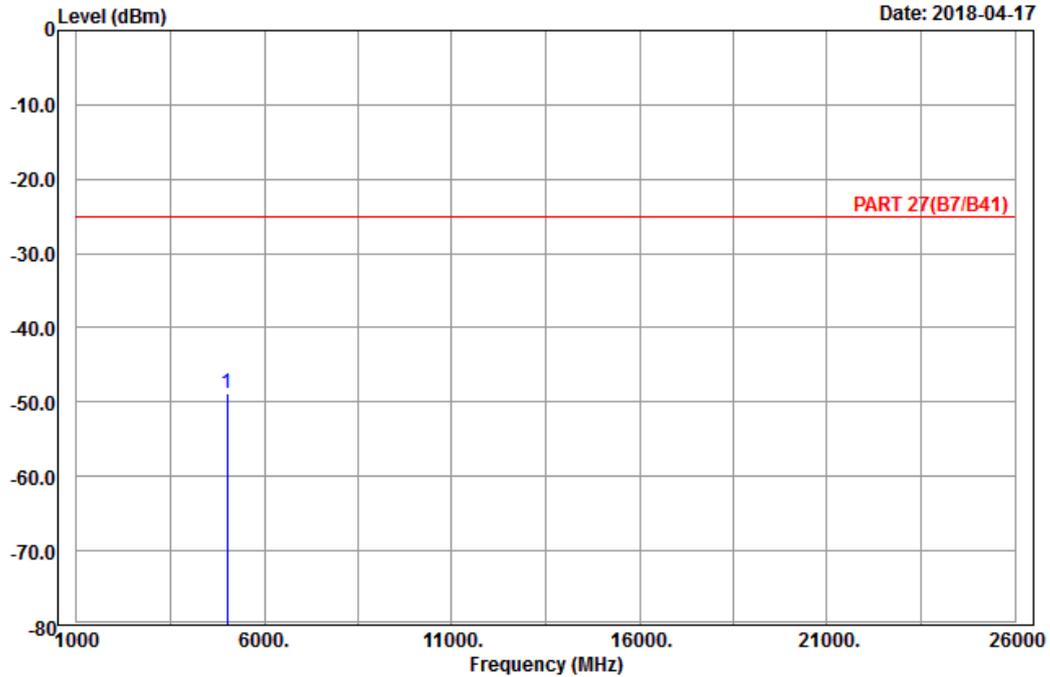

Site : 966 chamber 1
Condition: PART 27(B7/B41) Horizontal
Remark : LTE_Band 41_Link_CH39750
Tested by: Karl Lee


	Read	Limit	Over			
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5012.00	-48.75	-67.83	-25.00	-23.75	19.08	Peak



A D T

Data: 4

Date: 2018-04-17

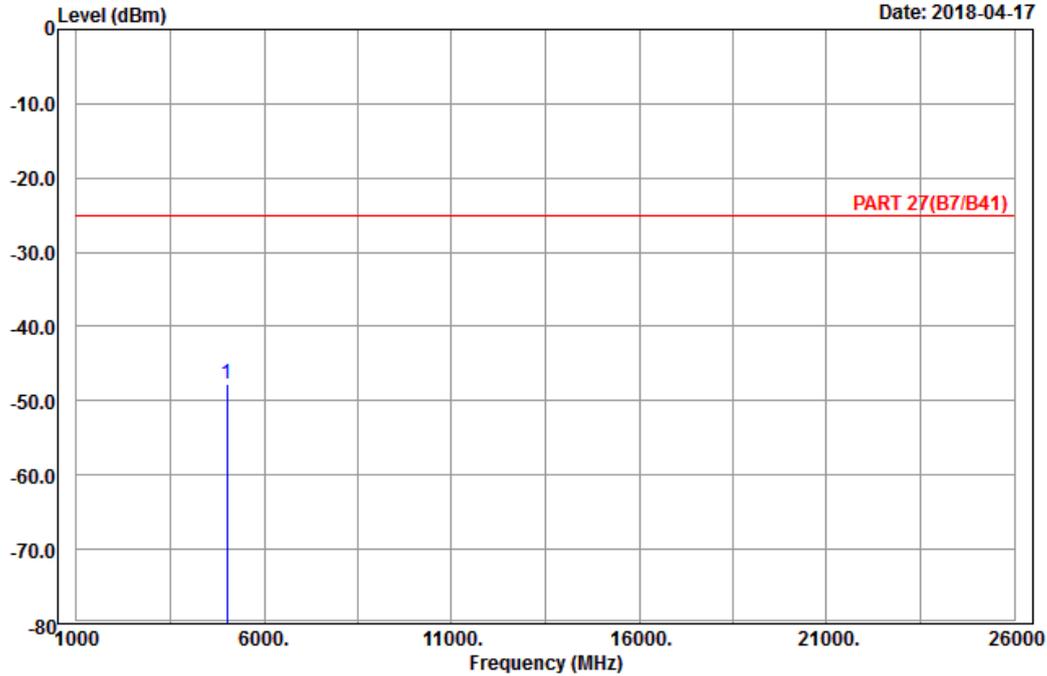

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Vertical
 Remark : LTE_Band 41_Link_CH39750
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	pp 5012.00	-47.84	-66.92	-25.00	-22.84	19.08	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 2018-04-17

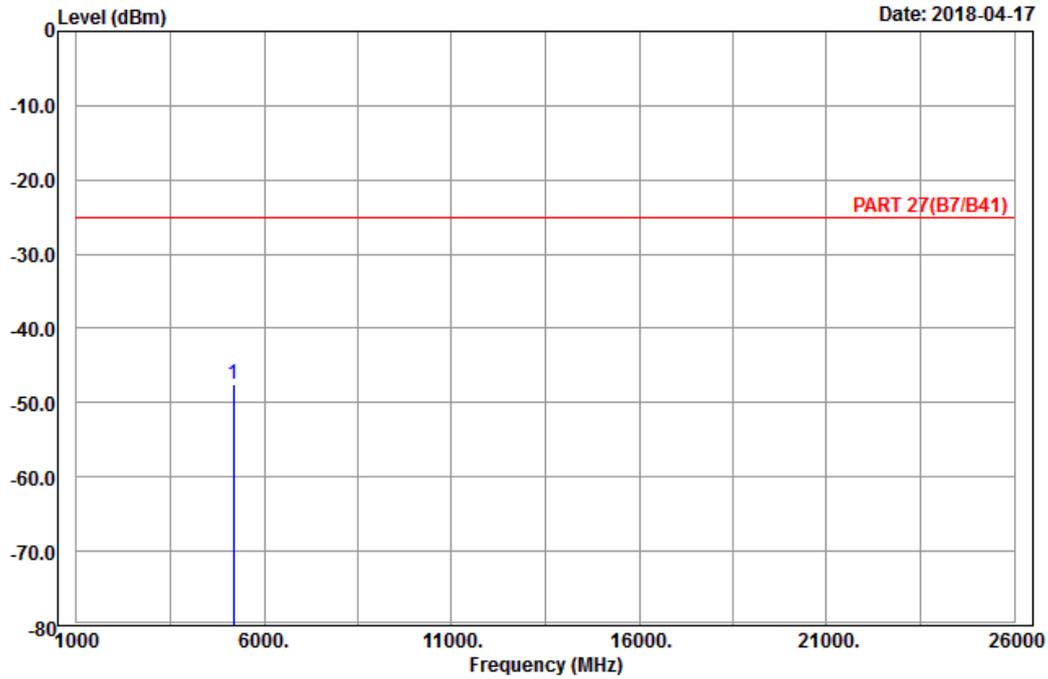

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Horizontal
 Remark : LTE_Band 41_Link_CH40620
 Tested by: Karl Lee


Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5186.00	-47.49	-67.61	-25.00	-22.49	20.12	Peak



A D T

Data: 4

Date: 2018-04-17

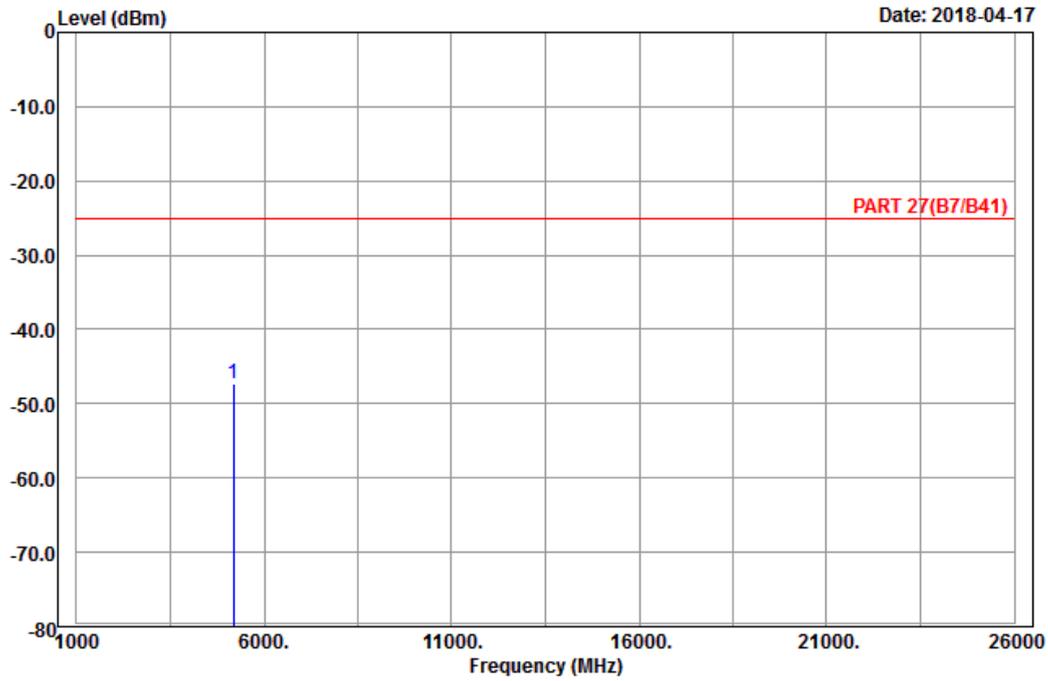

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Vertical
 Remark : LTE_Band 41_Link_CH40620
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	pp 5186.00	-47.29	-67.41	-25.00	-22.29	20.12	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 7

Date: 2018-04-17

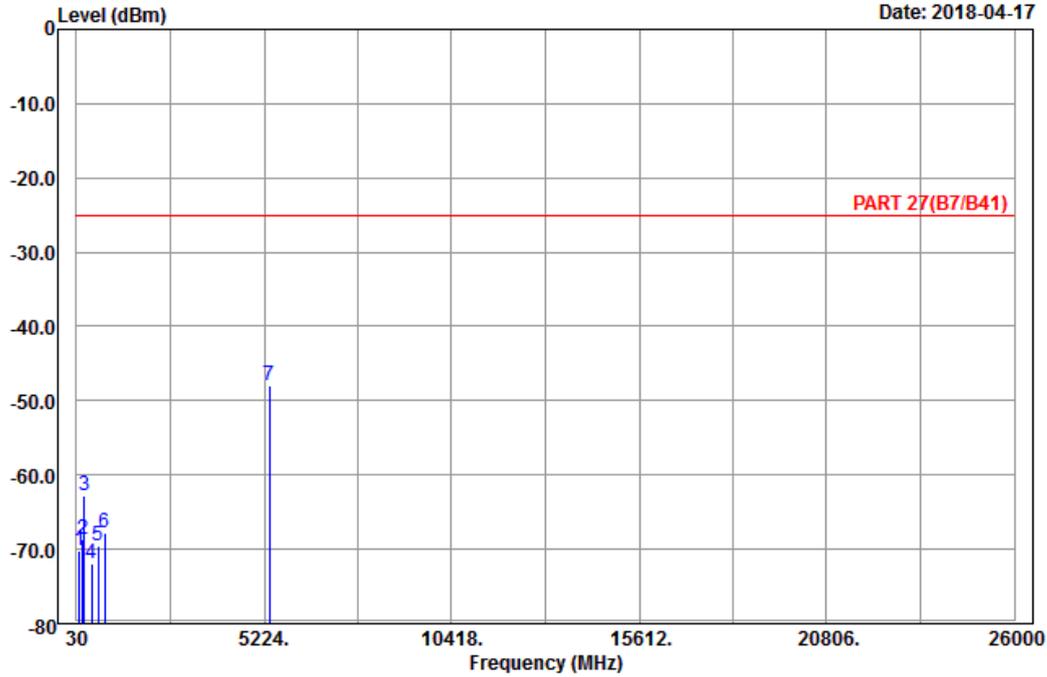

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Horizontal
 Remark : LTE_Band 41_Link_CH41490
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	114.78	-70.16	-61.53	-25.00	-45.16	-8.63	Peak
2	207.39	-68.76	-62.68	-25.00	-43.76	-6.08	Peak
3	249.24	-62.73	-57.21	-25.00	-37.73	-5.52	Peak
4	444.20	-71.98	-68.26	-25.00	-46.98	-3.72	Peak
5	622.70	-69.56	-69.73	-25.00	-44.56	0.17	Peak
6	813.10	-67.87	-69.74	-25.00	-42.87	1.87	Peak
7 pp	5368.00	-47.90	-68.22	-25.00	-22.90	20.32	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 8

Date: 2018-04-17

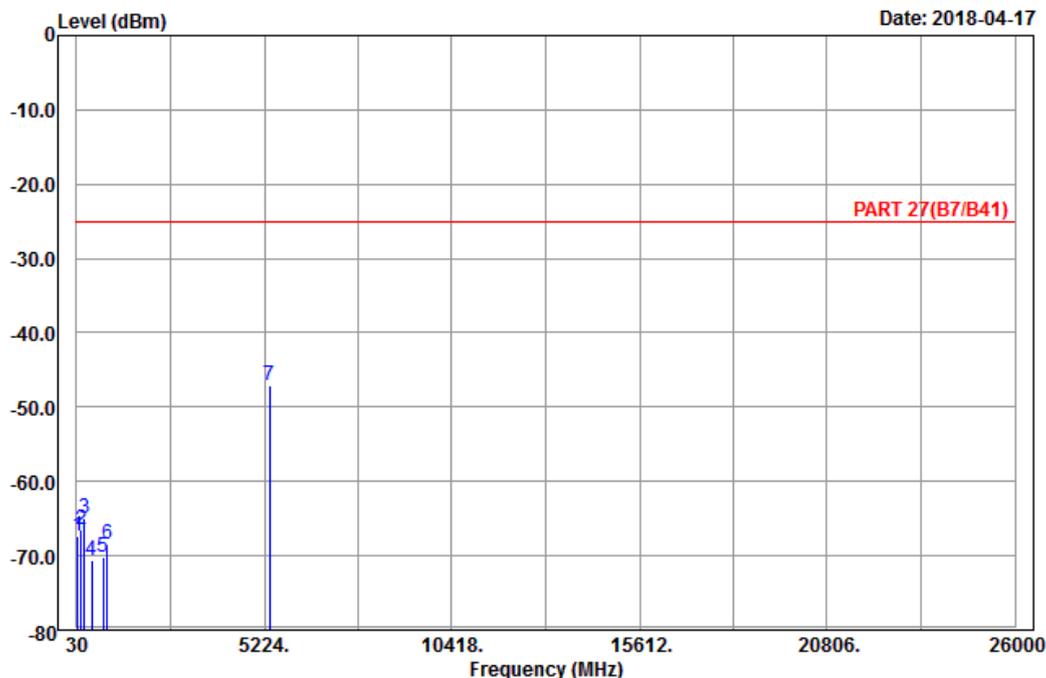

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Vertical
 Remark : LTE_Band 41_Link_CH41490
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	73.20	-67.25	-54.90	-25.00	-42.25	-12.35	Peak
2	146.64	-66.42	-58.56	-25.00	-41.42	-7.86	Peak
3	234.39	-65.06	-59.34	-25.00	-40.06	-5.72	Peak
4	455.40	-70.67	-66.66	-25.00	-45.67	-4.01	Peak
5	755.70	-70.24	-69.31	-25.00	-45.24	-0.93	Peak
6	874.00	-68.51	-70.65	-25.00	-43.51	2.14	Peak
7 pp	5360.00	-47.09	-67.39	-25.00	-22.09	20.30	Peak

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---