

## FCC Test Report

### (PART 90S)

**Report No.:** RF180125C14-15

**FCC ID:** B94HNQ10CZV

**Test Model:** HSN-Q10C

**Received Date:** Feb. 05, 2018

**Test Date:** Mar. 30, 2018 ~ May 21, 2018

**Issued Date:** Jun. 01, 2018

**Applicant:** HP Inc.

**Address:** 3390 East Harmony Road, Fort Collins, Colorado 80528, United States

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan ( R.O.C )

**Test Location (1):** No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil, Kwei Shan Dist., Taoyuan City 33383, Taiwan (R.O.C)

**Test Location (2):** No.215, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City 231, Taiwan, R.O.C

**FCC Registration /  
Designation Number:** 427177 / TW0011



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specifically mentioned, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record .....</b>	<b>3</b>
<b>1 Certificate of Conformity .....</b>	<b>4</b>
<b>2 Summary of Test Results .....</b>	<b>5</b>
2.1 Measurement Uncertainty .....	5
2.2 Test Site and Instruments .....	6
<b>3 General Information .....</b>	<b>7</b>
3.1 General Description of EUT .....	7
3.2 Configuration of System under Test .....	9
3.2.1 Description of Support Units .....	9
3.3 Test Mode Applicability and Tested Channel Detail .....	10
3.4 EUT Operating Conditions .....	12
3.5 General Description of Applied Standards .....	12
<b>4 Test Types and Results .....</b>	<b>13</b>
4.1 Output Power Measurement .....	13
4.1.1 Limits of Output Power Measurement .....	13
4.1.2 Test Procedures .....	13
4.1.3 Test Setup .....	14
4.1.4 Test Results .....	15
4.2 Frequency Stability Measurement .....	18
4.2.1 Limits of Frequency Stability Measurement .....	18
4.2.2 Test Procedure .....	18
4.2.3 Test Setup .....	18
4.2.4 Test Results .....	19
4.3 Occupied Bandwidth Measurement .....	23
4.3.1 Test Procedure .....	23
4.3.2 Test Setup .....	23
4.3.3 Test Result .....	24
4.4 Emission Mask Measurement .....	26
4.4.1 Limits of Band Edge Measurement .....	26
4.4.2 Test Setup .....	26
4.4.3 Test Procedures .....	26
4.4.4 Test Results .....	27
4.5 Conducted Spurious Emissions .....	30
4.5.1 Limits of Conducted Spurious Emissions Measurement .....	30
4.5.2 Test Setup .....	30
4.5.3 Test Procedure .....	30
4.5.4 Test Results .....	31
4.6 Radiated Emission Measurement .....	35
4.6.1 Limits of Radiated Emission Measurement .....	35
4.6.2 Test Procedure .....	35
4.6.3 Deviation from Test Standard .....	35
4.6.4 Test Setup .....	36
4.6.5 Test Results .....	37
<b>5 Pictures of Test Arrangements .....</b>	<b>51</b>
<b>Appendix – Information on the Testing Laboratories .....</b>	<b>52</b>

### Release Control Record

Issue No.	Description	Date Issued
RF180125C14-15	Original Release	Jun. 01, 2018

## 1 Certificate of Conformity

**Product:** Notebook Computer  
**Brand:** HP  
**Test Model:** HSN-Q10C  
**Sample Status:** Production Unit  
**Applicant:** HP Inc.  
**Test Date:** Mar. 30, 2018 ~ May 21, 2018  
**Standards:** FCC Part 90, Subpart S

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :** Evonne Liu, **Date:** Jun. 01, 2018  
Evonne Liu / Specialist

**Approved by :** Dylan Chiou, **Date:** Jun. 01, 2018  
Dylan Chiou / Project Engineer

## 2 Summary of Test Results

Applied Standard: FCC Part 90 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 90.635 (b)	Effective Radiated Power	Pass	Meet the requirement of limit.
2.1055 90.213	Frequency Stability	Pass	Meet the requirement of limit.
2.1049 90.209	Occupied Bandwidth (*)	Pass	Meet the requirement of limit.
2.1051 90.209	Emission Masks	Pass	Meet the requirement of limit.
2.1051 90.691	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 90.691	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -44.34 dB at 1638 MHz.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150 kHz ~ 30 MHz	2.44 dB
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.0153 dB
	200 MHz ~ 1000 MHz	2.0224 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	1.0121 dB
	18 GHz ~ 40 GHz	1.1508 dB

## 2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent Technologies	N9038A	MY52260177	Jul. 05, 2017	Jul. 04, 2018
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Jan. 11, 2018	Jan. 10, 2019
Double Ridge Guide Horn Antenna EMCO	3115	5619	Nov. 30, 2017	Nov. 29, 2018
HORN Antenna ETS	3117	00034128	Dec. 14, 2017	Dec. 13, 2018
BILOG Antenna SCHWARZBECK	VULB 9168	9168-153	Dec. 06, 2017	Dec. 05, 2018
Fixed Attenuator Mini-Circuits	BW-N10W5+	NA	Jul. 07, 2017	Jul. 06, 2018
Preamplifier Agilent	310N	187226	Jun. 23, 2017	Jun. 22, 2018
Preamplifier Agilent	83017A	MY39501357	Jun. 23, 2017	Jun. 22, 2018
RF signal cable ETS-LINDGREN	5D-FB	Cable-CH1-01(RF C-SMS-100-SMS- 120+RFC-SMS-1 00-SMS-400)	Jun. 23, 2017	Jun. 22, 2018
RF signal cable ETS-LINDGREN	8D-FB	Cable-CH1-02(RF C-SMS-100-SMS- 24)	Jun. 23, 2017	Jun. 22, 2018
Software BV ADT	E3 8.130425b	NA	NA	NA
Antenna Tower MF	NA	NA	NA	NA
Turn Table MF	NA	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Communications Tester-Wireless Agilent	8960 Series 10	MY53201073	Jun. 28, 2017	Jun. 27, 2019
Radio Communication Analyzer Anritsu	MT8820C	6201010284	Dec. 28, 2017	Dec. 27, 2018
Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 08, 2017	Sep. 07, 2018
DC Power Supply Topward	33010D	807748	Oct. 25, 2016	Oct. 24, 2018
Digital Multimeter Fluke	87-III	70360742	Jun. 30, 2017	Jun. 29, 2018

- Note: 1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HsinTien Chamber 1.
3. The horn antenna and preamplifier (model: 83017A) are used only for the measurement of emission frequency above 1 GHz if tested.
4. The IC Site Registration No. is IC7450I-1.

### 3 General Information

#### 3.1 General Description of EUT

<b>Product</b>	Notebook Computer	
<b>Brand</b>	HP	
<b>Test Model</b>	HSN-Q10C	
<b>Status of EUT</b>	Production Unit	
<b>Power Supply Rating</b>	20 or 15 or 12 or 9 or 5 Vdc (Adapter)	
<b>Modulation Type</b>	LTE	QPSK, 16QAM
<b>Frequency Range</b>	LTE Band 26 (Channel Bandwidth: 1.4 MHz)	814.7 ~ 823.3 MHz
	LTE Band 26 (Channel Bandwidth: 3 MHz)	815.5 ~ 822.5 MHz
	LTE Band 26 (Channel Bandwidth: 5 MHz)	816.5 ~ 821.5 MHz
	LTE Band 26 (Channel Bandwidth: 10 MHz)	819 MHz
<b>Emission Designator</b>	LTE Band 26 (Channel Bandwidth: 1.4 MHz)	1M09W7D
	LTE Band 26 (Channel Bandwidth: 3 MHz)	2M70G7D
	LTE Band 26 (Channel Bandwidth: 5 MHz)	4M49W7D
	LTE Band 26 (Channel Bandwidth: 10 MHz)	8M97W7D
<b>Max. ERP Power</b>	LTE Band 26 (Channel Bandwidth: 1.4 MHz)	31.92 mW
	LTE Band 26 (Channel Bandwidth: 3 MHz)	32.14 mW
	LTE Band 26 (Channel Bandwidth: 5 MHz)	32.06 mW
	LTE Band 26 (Channel Bandwidth: 10 MHz)	32.66 mW
<b>Antenna Type</b>	Refer to Note as below	
<b>Accessory Device</b>	Refer to Note as below	
<b>Data Cable Supplied</b>	Refer to Note as below	

Note:

1. The WWAN module (Brand: FOXCONN, Model: T77W676) was installed in the EUT.
2. The EUT contains following accessory devices.

Product	Brand	Model	Description
Adapter	hp	TPN-LA12	I/P: 100-240 Vac, 50-60 Hz, 1.6 A O/P: 20 Vdc, 3.25 A, 15 Vdc, 4.33 A, 12 Vdc, 5 A, 9 Vdc, 3 A, 5 Vdc, 3 A

3. The antenna information is listed as below.


Ant. Type	Manuf.	Parts Number	Antenna Gain							
			LTE 2 / LTE 25 / WCDMA Band II	LTE 4 / LTE 66 / WCDMA Band IV	LTE 5 / LTE 26 / WCDMA Band V	LTE 7	LTE 12 / LTE 17	LTE 13	LTE 30	LTE 41
PIFA	INPAQ	Main Ant.: DQ6LB020017 (WA-P-LTE8LTE12LBLB-02-001) Aux Ant.: DQ6LB020017 (WA-P-LTE8LTE12LBLB-02-001)	-6.19	-5.79	-5.86	-4.9	-5.21	-4.32	-3.68	-4.9

Antenna Type	Vendor	Part Number	Antenna Gain (dBi)			
			Laptop PC Mode			
			WLAN 2.4GHz	WLAN 5.2GHz	WLAN 5.5GHz	WLAN 5.8GHz
PIFA	INPAQ	WLAN Main Antenna: DQ6LB020509 (WA-P-LBLB-02-059) WLAN Aux Antenna: DQ6LB020509 (WA-P-LBLB-02-059)	1.66	0.54	0.56	-0.21
			Tablet PC Mode			
			WLAN 2.4GHz	WLAN 5.2GHz	WLAN 5.5GHz	WLAN 5.8GHz
			-0.36	3.36	2.21	3.08


4. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

### 3.2 Configuration of System under Test

#### <Radiated Emission Test>

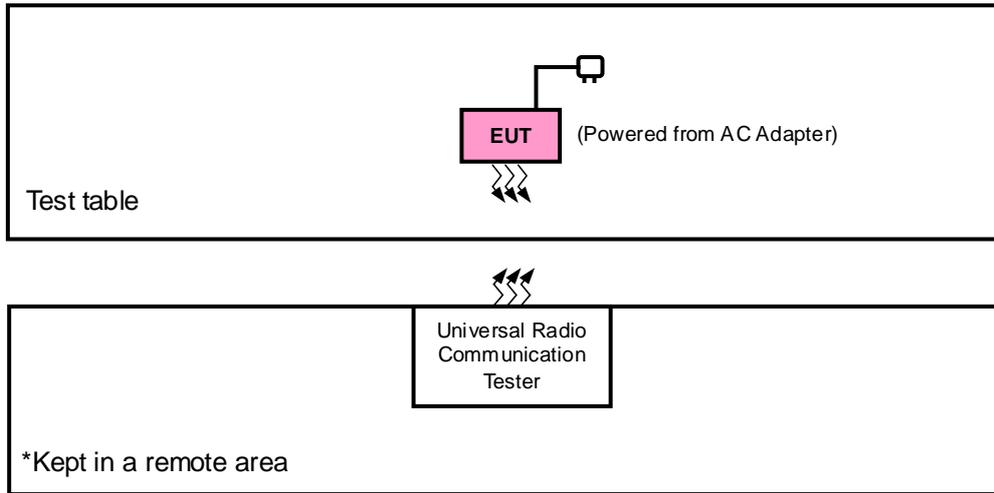

#### <E.R.P. Test>

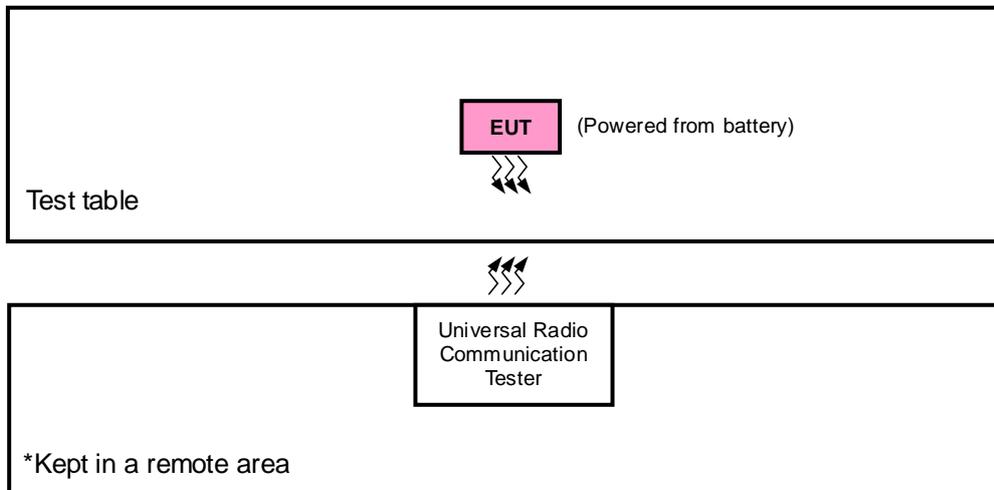

#### 3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

### 3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	ERP	Radiated Emission
LTE Band 26	Z-plane	X-axis

### LTE Band 26

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK, 16QAM	1 RB / 2 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK, 16QAM	1 RB / 7 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK, 16QAM	1 RB / 12 RB Offset
		26740	26740	10 MHz	QPSK, 16QAM	1 RB / 49 RB Offset
-	Frequency Stability	26697 to 26783	26697, 26783	1.4 MHz	QPSK	1 RB / 2 RB Offset
		26705 to 26775	26705, 26775	3 MHz	QPSK	1 RB / 7 RB Offset
		26715 to 26765	26715, 26765	5 MHz	QPSK	1 RB / 12 RB Offset
		26740	26740	10 MHz	QPSK	1 RB / 49 RB Offset
-	Occupied Bandwidth	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
-	Emission Mask	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
-	Conducted Emission	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK	1 RB / 0 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK	1 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK	1 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK	1 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK	1 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK	1 RB / 0 RB Offset

**Note:** This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

#### Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
ERP	25 deg. C, 65 % RH	6.54 Vdc	Charles Hsiao
Frequency Stability	25 deg. C, 65 % RH	6.54 Vdc	Wayne Lin
Occupied Bandwidth	25 deg. C, 65 % RH	6.54 Vdc	Wayne Lin
Peak to Average Ratio	25 deg. C, 65 % RH	6.54 Vdc	Wayne Lin
Emission Mask	25 deg. C, 65 % RH	6.54 Vdc	Wayne Lin
Conducted Emission	25 deg. C, 65 % RH	6.54 Vdc	Wayne Lin
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Charles Hsiao

### **3.4 EUT Operating Conditions**

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

### **3.5 General Description of Applied Standards**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 90**

**ANSI/TIA/EIA-603-E 2016**

**ANSI 63.26-2015**

**Note:** All test items have been performed and recorded as per the above standards.

## 4 Test Types and Results

### 4.1 Output Power Measurement

#### 4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 100 watts e.r.p.

#### 4.1.2 Test Procedures

##### **EIRP / ERP Measurement:**

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 10 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G.
- d.  $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$ . E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,  $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15 \text{ dB}$ .


##### **Conducted Power Measurement:**

- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


### 4.1.3 Test Setup

#### EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

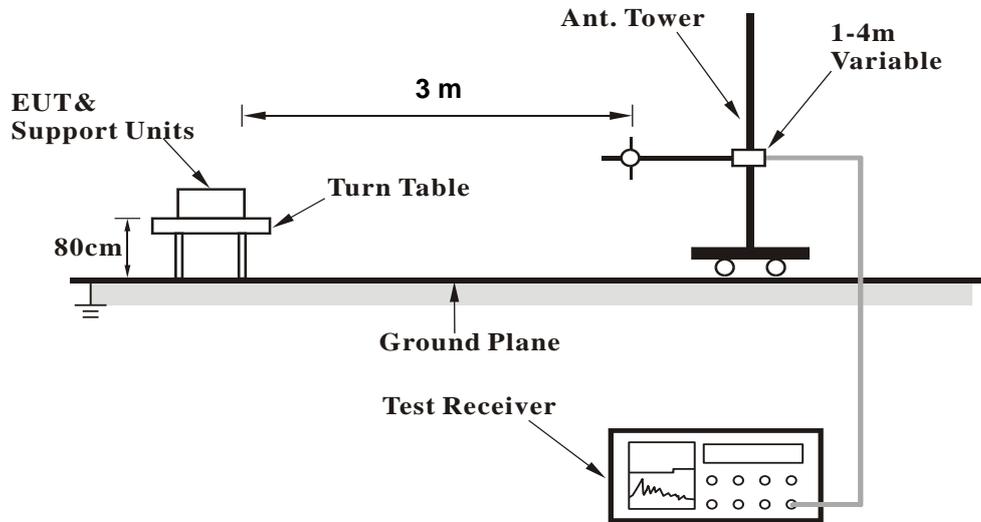


<Radiated Emission above 1 GHz>

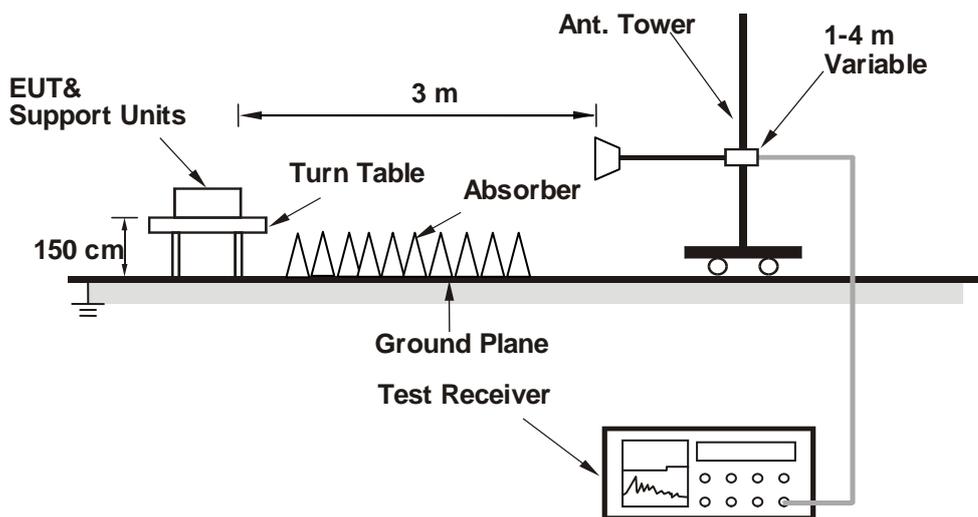

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### Conducted Power Measurement:



4.1.4 Test Results

LTE Band 26															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26765	26865	26965				Channel		26740	26865	26990	
		Frequency (MHz)		821.5	831.5	841.5				Frequency (MHz)		819.0	831.5	844.0	
15M	QPSK	1	0	23.21	23.22	23.27	0	10M	QPSK	1	0	23.16	23.17	23.18	0
		1	37	23.54	23.55	23.60	0			1	24	23.47	23.48	23.50	0
		1	74	23.24	23.25	23.30	0			1	49	23.22	23.20	23.21	0
		36	0	22.38	22.39	22.44	1			25	0	22.31	22.36	22.42	1
		36	19	22.49	22.50	22.55	1			25	12	22.47	22.42	22.52	1
		36	39	22.39	22.40	22.45	1			25	25	22.31	22.30	22.45	1
		75	0	22.44	22.45	22.50	1			50	0	22.38	22.39	22.49	1
	16QAM	1	0	22.12	22.19	22.22	1		16QAM	1	0	22.11	22.11	22.18	1
		1	37	22.52	22.55	22.53	1			1	24	22.41	22.45	22.57	1
		1	74	22.18	22.22	22.28	1			1	49	22.15	22.11	22.17	1
		36	0	21.37	21.33	21.42	2			25	0	21.34	21.31	21.42	2
		36	19	21.42	21.43	21.46	2			25	12	21.40	21.32	21.42	2
		36	39	21.35	21.39	21.39	2			25	25	21.28	21.30	21.37	2
		75	0	21.37	21.44	21.40	2			50	0	21.37	21.36	21.35	2
5M	QPSK	1	0	23.16	23.21	23.08	0	3M	QPSK	1	0	23.03	22.97	22.97	0
		1	12	23.47	23.42	23.50	0			1	7	23.42	23.42	23.34	0
		1	24	23.04	23.13	23.14	0			1	14	23.10	23.22	23.08	0
		12	0	22.32	22.24	22.28	1			8	0	22.32	22.27	22.29	1
		12	6	22.27	22.31	22.55	1			8	3	22.38	22.30	22.48	1
		12	13	22.24	22.31	22.31	1			8	7	22.28	22.31	22.24	1
		25	0	22.35	22.37	22.31	1			15	0	22.34	22.38	22.34	1
	16QAM	1	0	21.90	22.01	22.16	1		16QAM	1	0	22.04	22.13	22.20	1
		1	12	22.35	22.35	22.45	1			1	7	22.36	22.33	22.46	1
		1	24	22.01	22.01	22.19	1			1	14	22.06	22.04	22.18	1
		12	0	21.21	21.15	21.33	2			8	0	21.18	21.28	21.34	2
		12	6	21.23	21.30	21.40	2			8	3	21.40	21.40	21.36	2
		12	13	21.18	21.22	21.27	2			8	7	21.16	21.23	21.32	2
		25	0	21.15	21.27	21.30	2			15	0	21.21	21.24	21.28	2
1.4M	QPSK	1	0	23.00	23.10	23.06	0	1.4M	QPSK	1	2	23.48	23.41	23.58	0
		1	2	23.48	23.41	23.58	0			1	5	23.03	23.01	23.23	0
		1	5	23.03	23.01	23.23	0			3	0	22.29	22.23	22.35	0
		3	0	22.29	22.23	22.35	0			3	1	22.45	22.36	22.46	0
		3	1	22.45	22.36	22.46	0			3	3	22.23	22.25	22.31	0
		3	3	22.23	22.25	22.31	0			6	0	22.42	22.39	22.41	1
		6	0	22.42	22.39	22.41	1			16QAM	1	0	21.99	21.97	22.09
	16QAM	1	2	22.35	22.33	22.43	1		1		2	22.35	22.33	22.43	1
		1	5	22.07	22.10	22.13	1		1		5	22.07	22.10	22.13	1
		3	0	21.16	21.32	21.24	1		3		0	21.16	21.32	21.24	1
		3	1	21.45	21.27	21.29	1		3		1	21.45	21.27	21.29	1
		3	3	21.15	21.17	21.29	1		3		3	21.15	21.17	21.29	1
		6	0	21.33	21.34	21.27	2		6		0	21.33	21.34	21.27	2

**ERP Power (dBm)**

LTE Band 26							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Z	26697	814.7	-14.07	31.208	14.99	31.54	H
	26740	819.0	-14.11	31.3	15.04	31.92	
	26783	823.3	-14.06	31.222	15.01	31.71	
	26697	814.7	-18.32	31.504	11.03	12.69	V
	26740	819.0	-17.97	31.117	11.00	12.58	
	26783	823.3	-18.86	31.922	10.91	12.34	
Channel Bandwidth: 1.4 MHz / 16QAM							
Z	26697	814.7	-15.09	31.208	13.97	24.93	H
	26740	819.0	-15.10	31.3	14.05	25.41	
	26783	823.3	-15.07	31.222	14.00	25.13	
	26697	814.7	-19.38	31.504	9.97	9.94	V
	26740	819.0	-18.97	31.117	10.00	9.99	
	26783	823.3	-19.86	31.922	9.91	9.80	

LTE Band 26							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Z	26705	815.5	-14.07	31.208	14.99	31.54	H
	26740	819.0	-14.08	31.3	15.07	32.14	
	26775	822.5	-14.05	31.222	15.02	31.78	
	26705	815.5	-18.32	31.504	11.03	12.69	V
	26740	819.0	-17.93	31.117	11.04	12.70	
	26775	822.5	-18.74	31.922	11.03	12.68	
Channel Bandwidth: 3 MHz / 16QAM							
Z	26705	815.5	-15.03	31.208	14.03	25.28	H
	26740	819.0	-15.08	31.3	14.07	25.53	
	26775	822.5	-15.04	31.222	14.03	25.30	
	26705	815.5	-19.32	31.504	10.03	10.08	V
	26740	819.0	-18.92	31.117	10.05	10.11	
	26775	822.5	-19.74	31.922	10.03	10.07	

LTE Band 26							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Z	26715	816.5	-14.02	31.208	15.04	31.90	H
	26740	819.0	-14.09	31.3	15.06	32.06	
	26765	821.5	-14.05	31.222	15.02	31.78	
	26715	816.5	-18.34	31.504	11.01	12.63	V
	26740	819.0	-17.90	31.117	11.07	12.78	
	26765	821.5	-18.74	31.922	11.03	12.68	
Channel Bandwidth: 5 MHz / 16QAM							
Z	26715	816.5	-15.00	31.208	14.06	25.46	H
	26740	819.0	-15.02	31.3	14.13	25.88	
	26765	821.5	-15.08	31.222	13.99	25.07	
	26715	816.5	-19.37	31.504	9.98	9.96	V
	26740	819.0	-18.91	31.117	10.06	10.13	
	26765	821.5	-19.71	31.922	10.06	10.14	

LTE Band 26							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Z	26740	819.0	-14.01	31.3	15.14	32.66	H
	26740	819.0	-17.87	31.117	11.10	12.87	V
Channel Bandwidth: 10 MHz / 16QAM							
Z	26740	819.0	-14.99	31.3	14.16	26.06	H
	26740	819.0	-18.80	31.117	10.17	10.39	V

## 4.2 Frequency Stability Measurement

### 4.2.1 Limits of Frequency Stability Measurement


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

### 4.2.2 Test Procedure

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5$  °C during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

**NOTE:** The frequency error was recorded frequency error from the communication simulator.

### 4.2.3 Test Setup

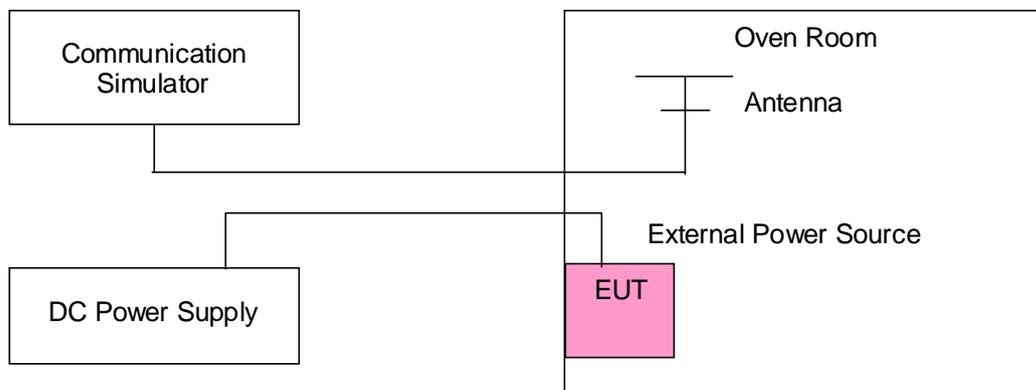

#### 4.2.4 Test Results

##### Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
7.7	814.700004	0.005	823.300003	0.003	2.5
6.54	814.700002	0.003	823.300003	0.004	2.5
8.85	814.700004	0.004	823.300002	0.002	2.5

**Note:** The applicant defined the normal working voltage of the battery is from 6.54 Vdc to 8.85 Vdc.

##### Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	814.700001	0.002	823.300002	0.003	2.5
-20	814.700001	0.001	823.300003	0.004	2.5
-10	814.700002	0.003	823.300004	0.005	2.5
0	814.700003	0.004	823.300002	0.003	2.5
10	814.700001	0.001	823.300002	0.002	2.5
20	814.699998	-0.003	823.299998	-0.003	2.5
30	814.699997	-0.004	823.299999	-0.002	2.5
40	814.699998	-0.003	823.299997	-0.003	2.5
50	814.699997	-0.004	823.299997	-0.004	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
7.7	815.500002	0.003	822.500004	0.005	2.5
6.54	815.500003	0.003	822.500003	0.003	2.5
8.85	815.500002	0.003	822.500002	0.002	2.5

**Note:** The applicant defined the normal working voltage of the battery is from 6.54 Vdc to 8.85 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	815.500004	0.005	822.500001	0.001	2.5
-20	815.500004	0.004	822.500003	0.004	2.5
-10	815.500004	0.004	822.500002	0.002	2.5
0	815.500003	0.004	822.500004	0.005	2.5
10	815.500001	0.001	822.500004	0.004	2.5
20	815.499998	-0.002	822.499998	-0.002	2.5
30	815.499997	-0.004	822.499997	-0.003	2.5
40	815.499998	-0.002	822.499997	-0.004	2.5
50	815.499996	-0.005	822.499996	-0.005	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
7.7	816.500004	0.005	821.500003	0.003	2.5
6.54	816.500001	0.001	821.500004	0.005	2.5
8.85	816.500002	0.003	821.500001	0.001	2.5

**Note:** The applicant defined the normal working voltage of the battery is from 6.54 Vdc to 8.85 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	816.500002	0.002	821.500003	0.003	2.5
-20	816.500002	0.002	821.500001	0.001	2.5
-10	816.500002	0.003	821.500002	0.002	2.5
0	816.500002	0.002	821.500002	0.002	2.5
10	816.500004	0.005	821.500003	0.004	2.5
20	816.499996	-0.005	821.499996	-0.005	2.5
30	816.499996	-0.005	821.499997	-0.004	2.5
40	816.499996	-0.005	821.499996	-0.005	2.5
50	816.499998	-0.003	821.499998	-0.003	2.5

## Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26		Limit (ppm)
	Channel Bandwidth: 10 MHz		
	Frequency (MHz)	Frequency Error (ppm)	
7.7	819.000002	0.002	2.5
6.54	819.000003	0.003	2.5
8.85	819.000003	0.004	2.5

**Note:** The applicant defined the normal working voltage of the battery is from 6.54 Vdc to 8.85 Vdc.

## Frequency Error vs. Temperature


Temp. (°C)	LTE Band 26		Limit (ppm)
	Channel Bandwidth: 10 MHz		
	Frequency (MHz)	Frequency Error (ppm)	
-30	819.000004	0.005	2.5
-20	819.000004	0.004	2.5
-10	819.000004	0.005	2.5
0	819.000004	0.005	2.5
10	819.000003	0.004	2.5
20	818.999998	-0.002	2.5
30	818.999999	-0.002	2.5
40	818.999999	-0.001	2.5
50	818.999999	-0.002	2.5

### 4.3 Occupied Bandwidth Measurement

#### 4.3.1 Test Procedure


The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

#### 4.3.2 Test Setup

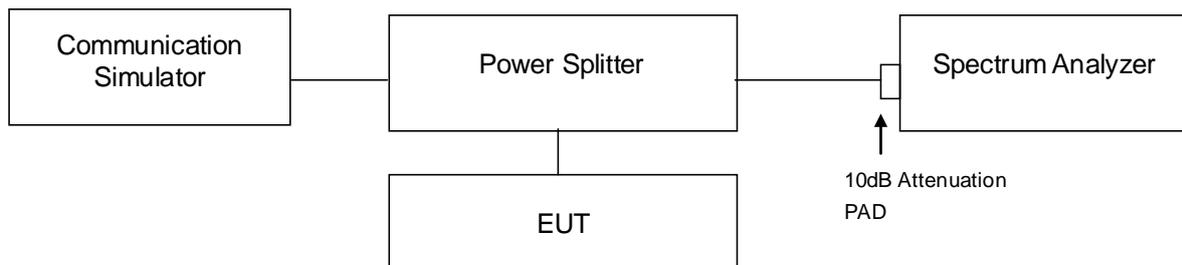


### 4.3.3 Test Result

LTE Band 26							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
26697	814.7	1.0871	1.0886	26705	815.5	2.6995	2.6947
26740	819.0	1.0864	1.0871	26740	819.0	2.7007	2.6959
26783	823.3	1.0876	1.0879	26775	822.5	2.7010	2.6968

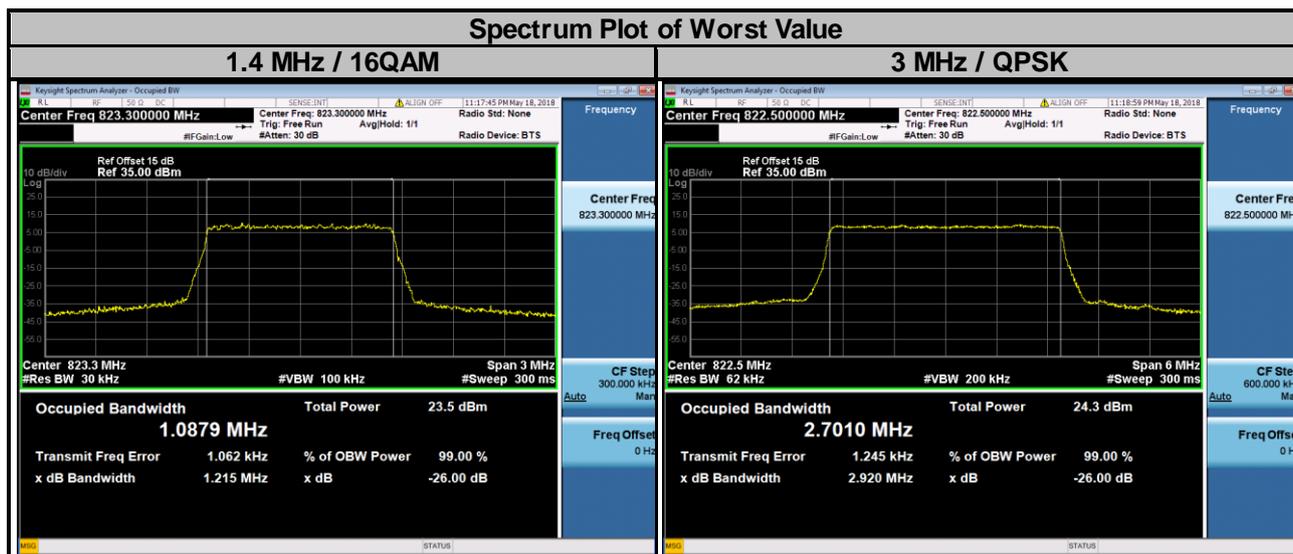

LTE Band 26							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
26715	816.5	4.4845	4.4863	26740	819.0	8.9631	8.9651
26740	819.0	4.4881	4.4912				
26765	821.5	4.4889	4.4914				

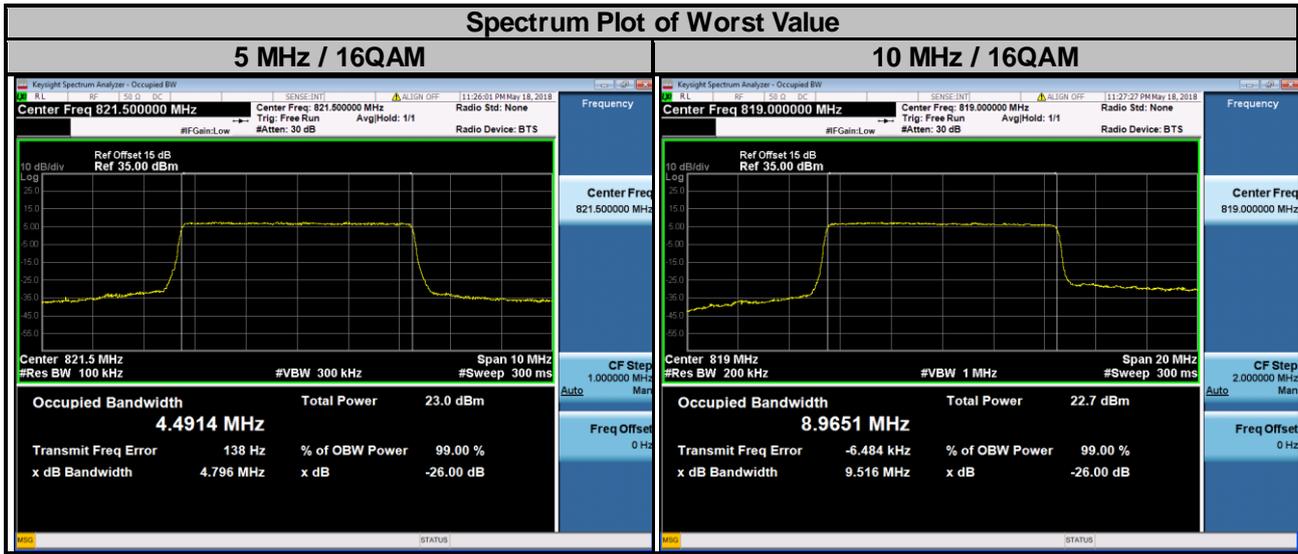


## 4.4 Emission Mask Measurement

### 4.4.1 Limits of Band Edge Measurement

According to FCC part 90.691 shall be tested the emission mask. For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $116 \text{ Log}_{10}(f/6.1)$  decibels or  $50+10\text{Log}_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.


### 4.4.2 Test Setup

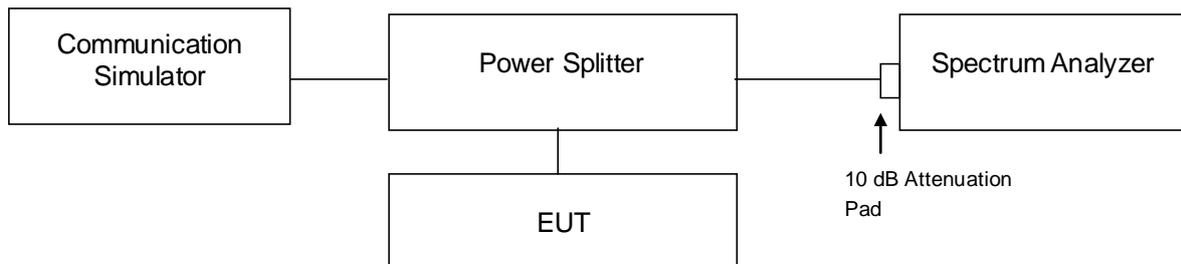


### 4.4.3 Test Procedures

- a. The measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- b. Record the test plot.


### 4.4.4 Test Results

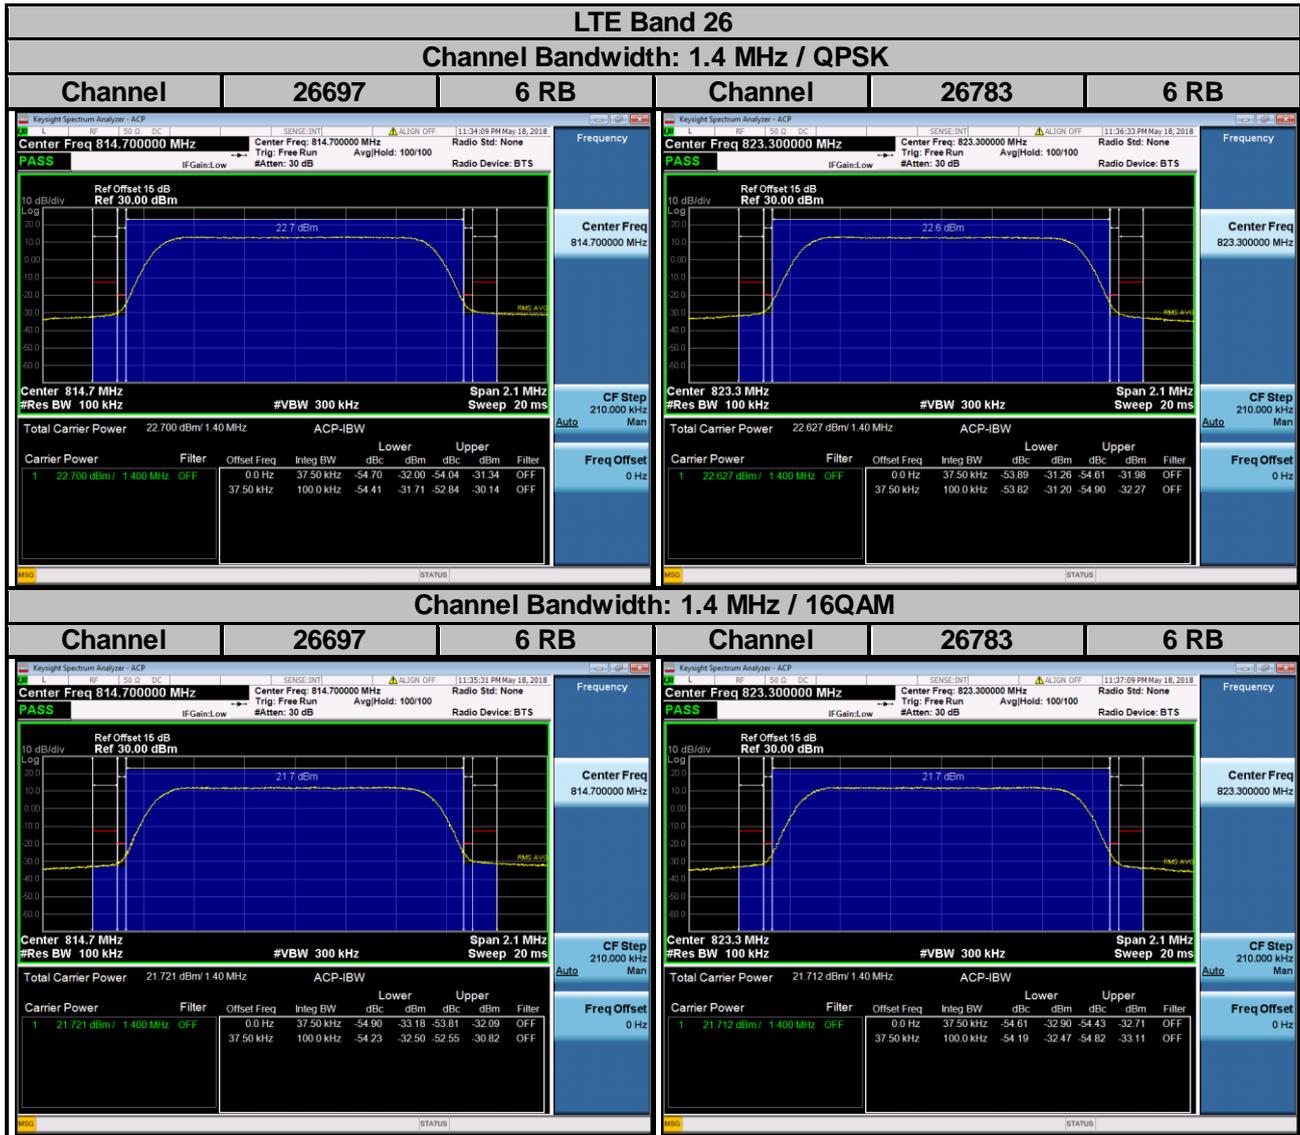


**LTE Band 26**  
**Channel Bandwidth: 3 MHz / QPSK**

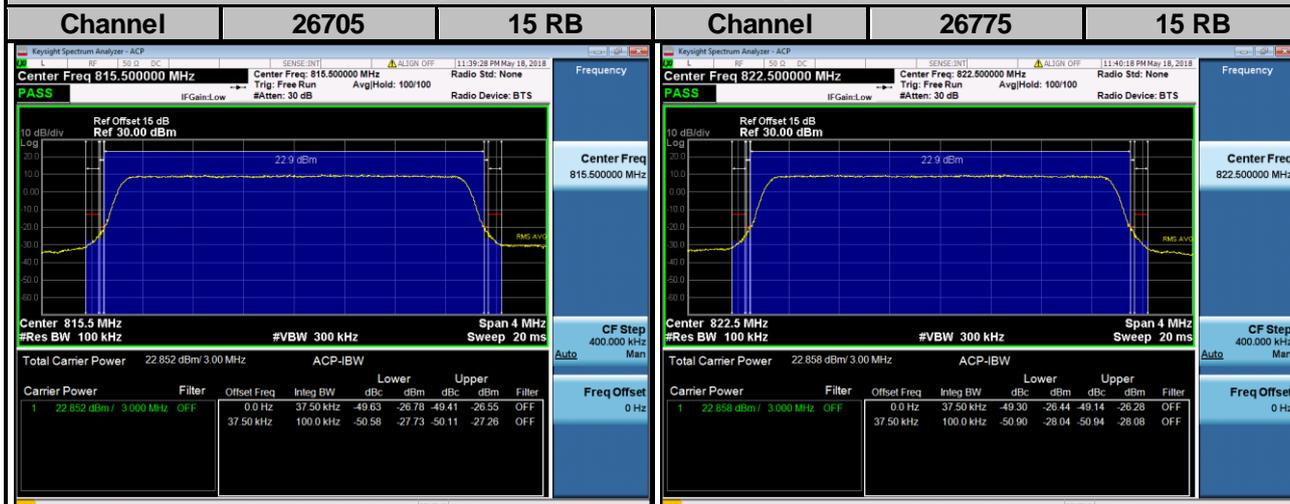


**Channel Bandwidth: 3 MHz / 16QAM**

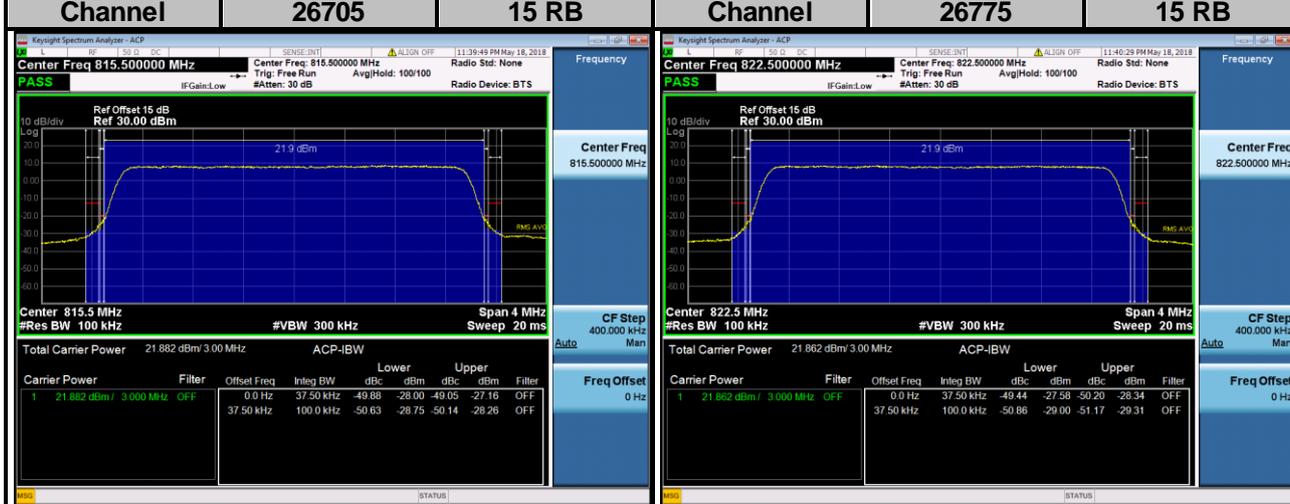

**LTE Band 26**  
**Channel Bandwidth: 5 MHz / QPSK**

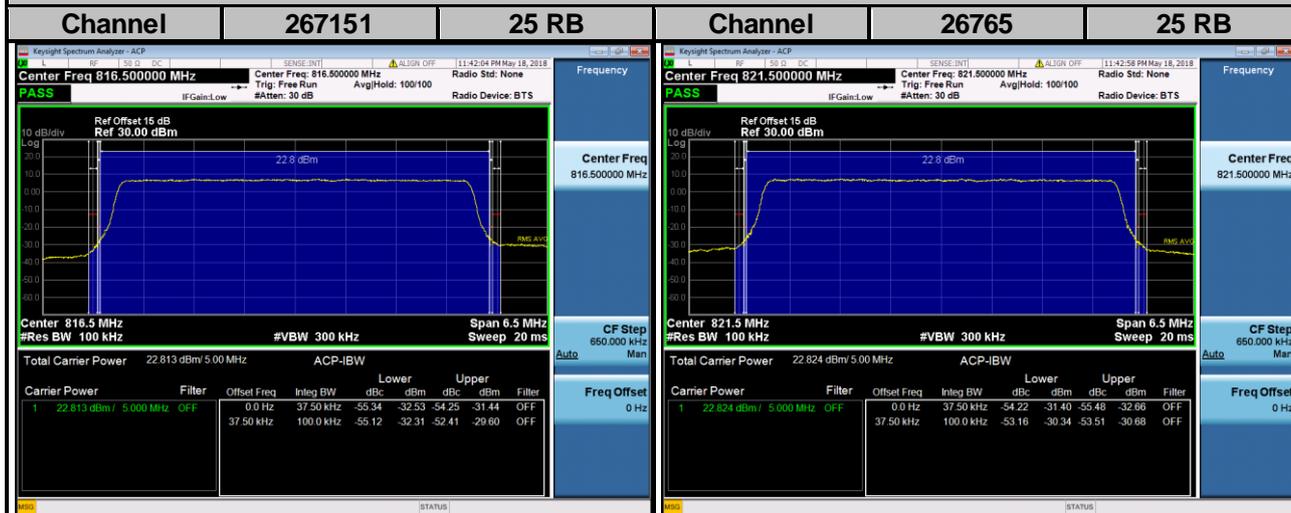

**Channel Bandwidth: 5 MHz / 16QAM**

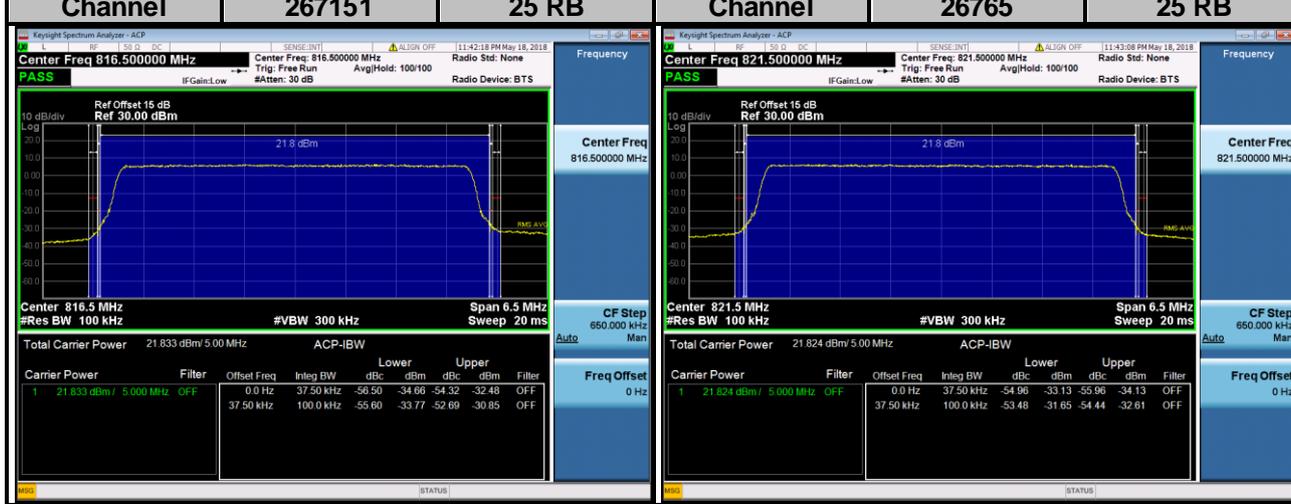

**LTE Band 26**

Channel Bandwidth: 10 MHz / QPSK			Channel Bandwidth: 10 MHz / 16QAM		
Channel	26740	50 RB	Channel	26740	50 RB




## 4.5 Conducted Spurious Emissions

### 4.5.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10}(P)$  dB. The limit of emission is equal to -13 dBm.


### 4.5.2 Test Setup

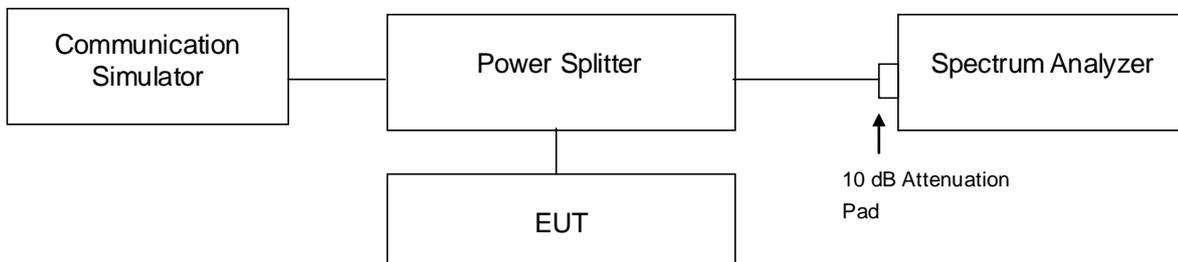



### 4.5.3 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 30 MHz to 10 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 100 kHz and VBW = 300 kHz are used for conducted emission measurement.



### 4.5.4 Test Results

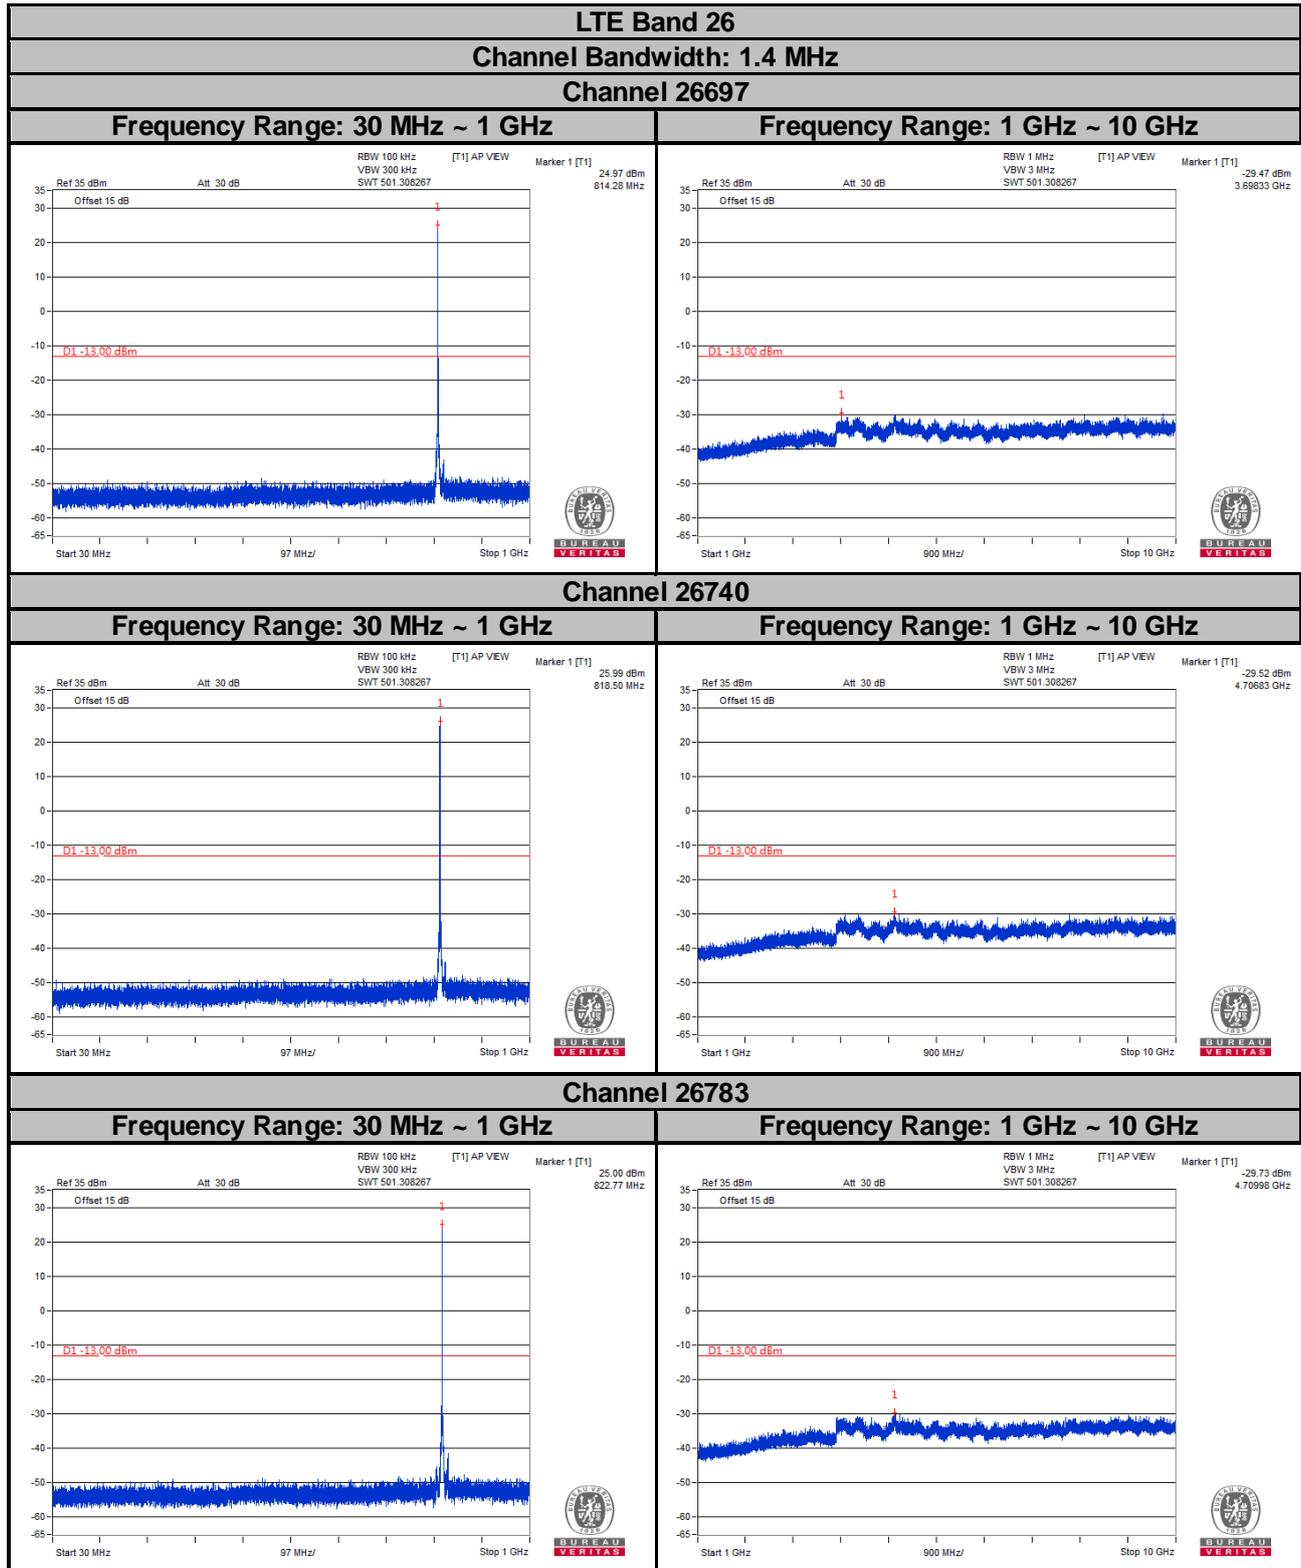



**LTE Band 26**  
**Channel Bandwidth: 3 MHz**  
**Channel 26705**

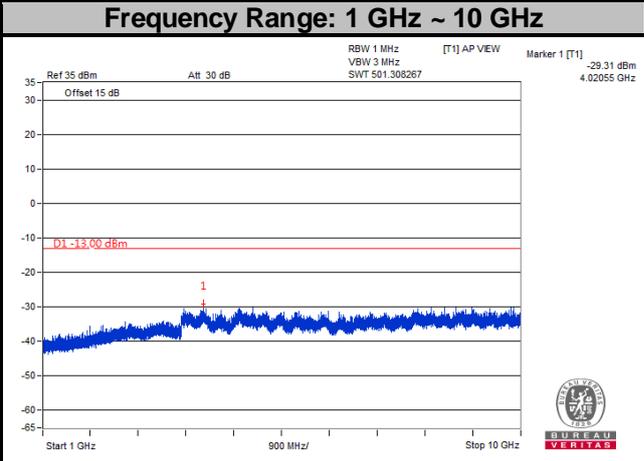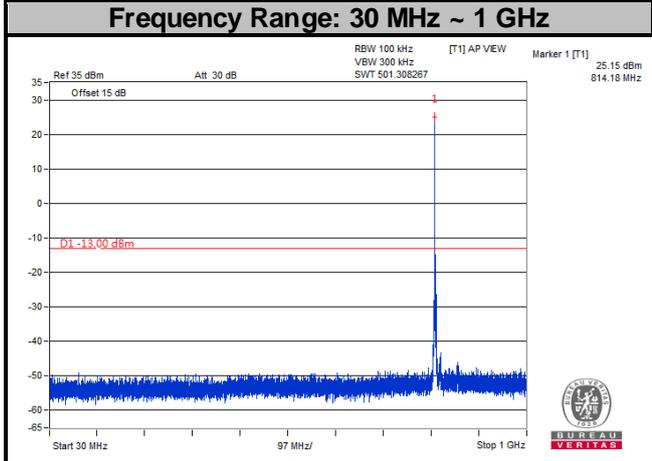



**Channel 26740**

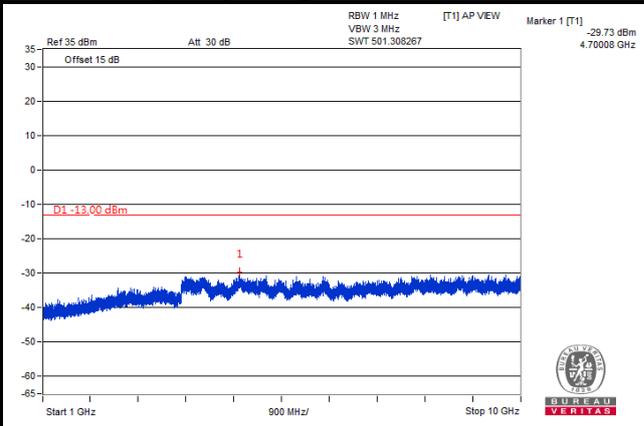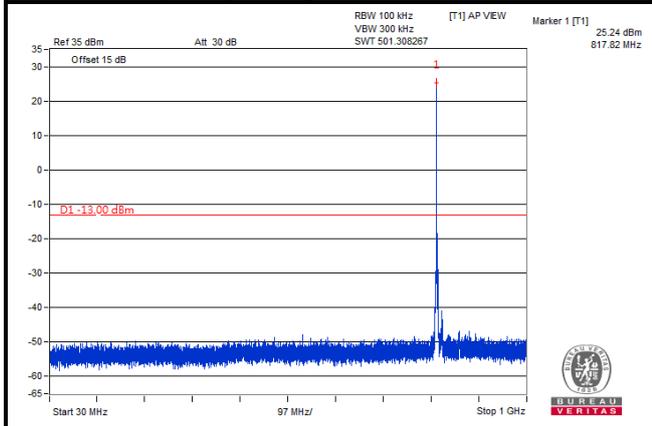



**Channel 26775**

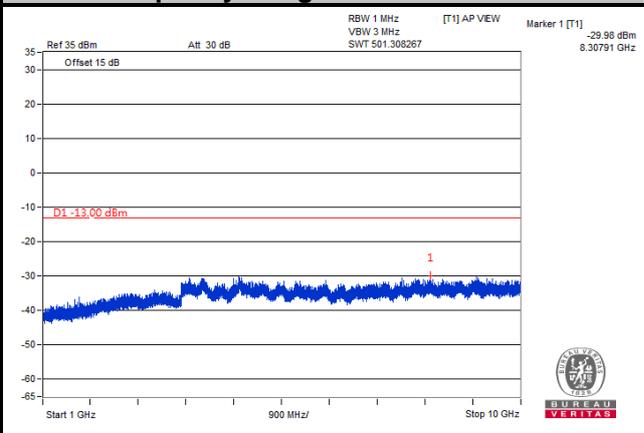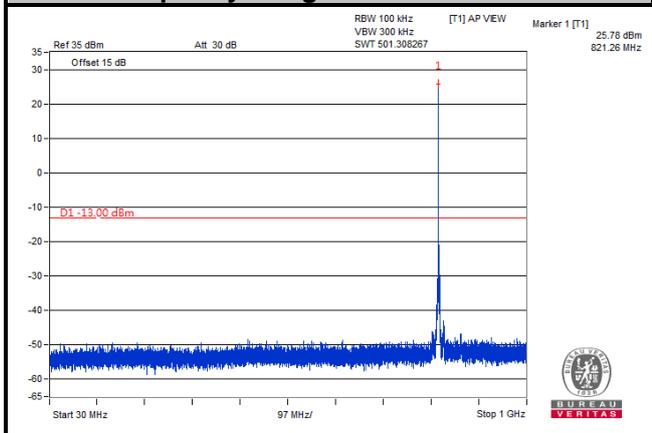



**LTE Band 26**  
**Channel Bandwidth: 5 MHz**  
**Channel 26715**

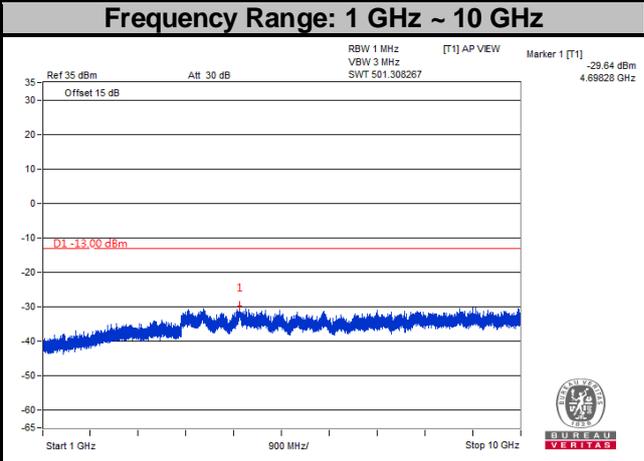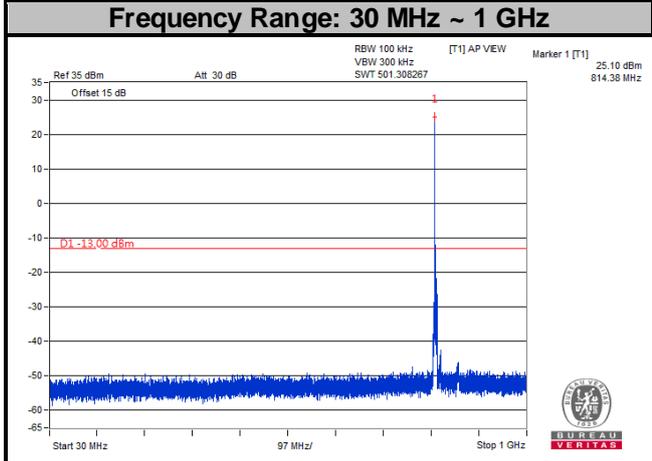

**Channel 26740**

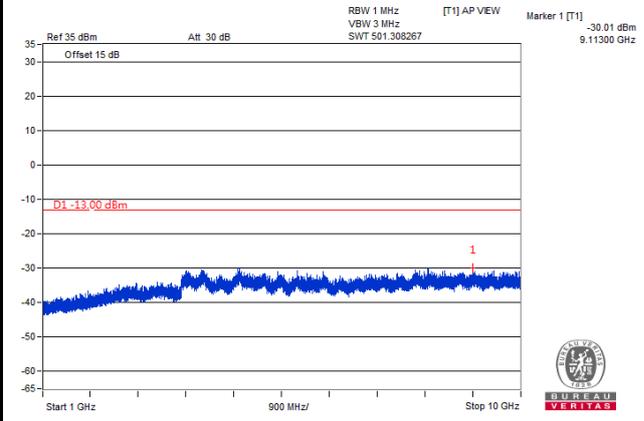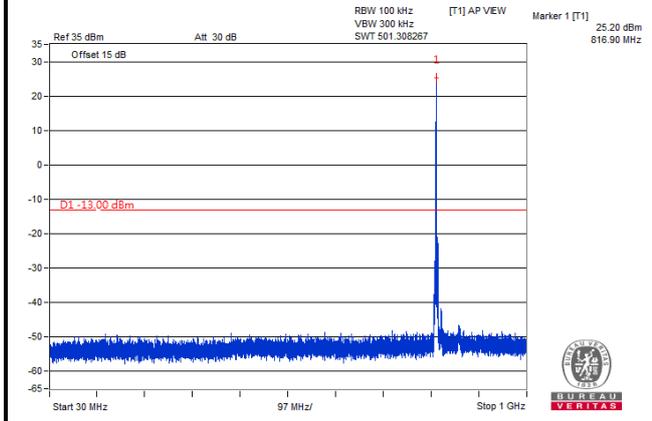

**Channel 26765**

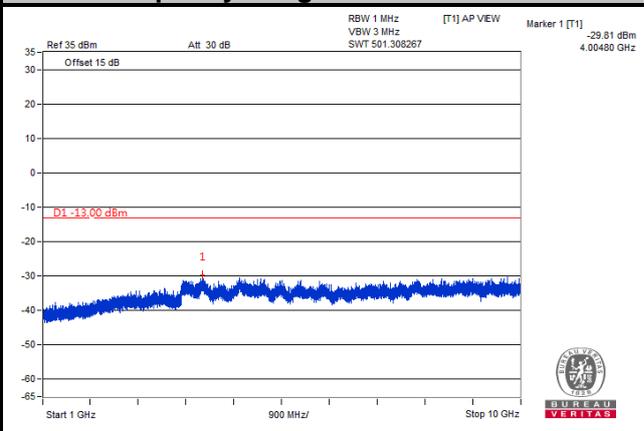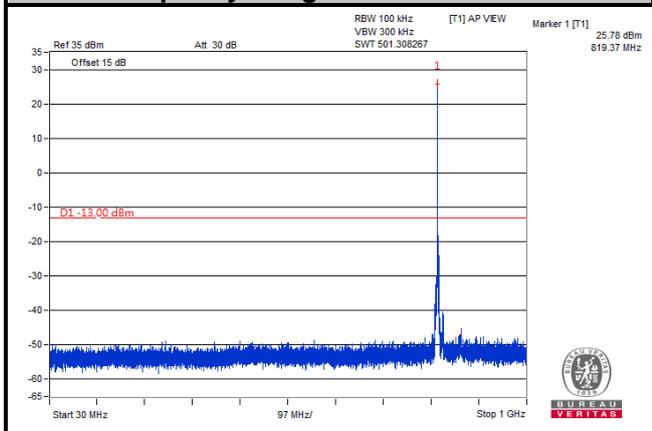



## 4.6 Radiated Emission Measurement

### 4.6.1 Limits of Radiated Emission Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10}(P)$  dB. The limit of emission is equal to -13 dBm.

### 4.6.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- c.  $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$ .
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,  $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15 \text{ dB}$ .


**Note:** The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

### 4.6.3 Deviation from Test Standard


No deviation.

#### 4.6.4 Test Setup

##### <Radiated Emission below or equal 1 GHz>

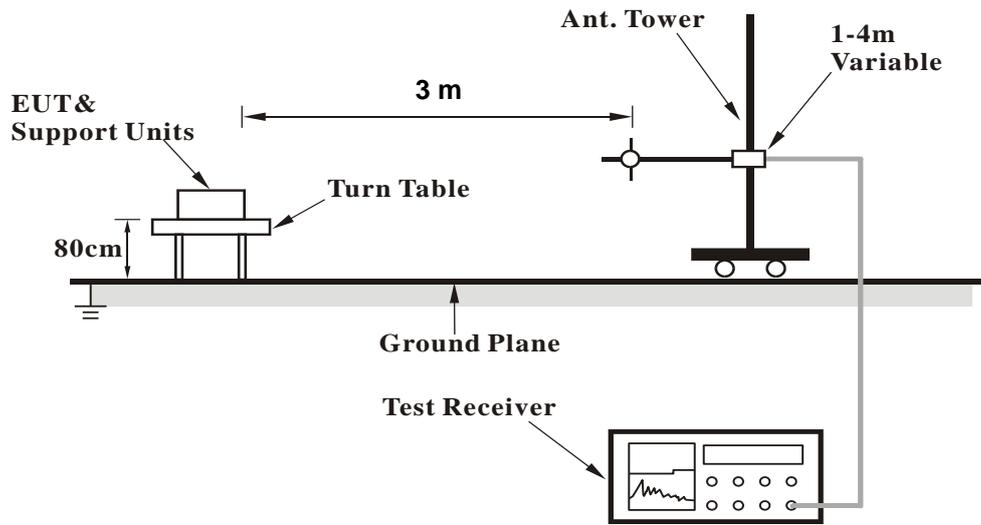

##### <Radiated Emission above 1 GHz>

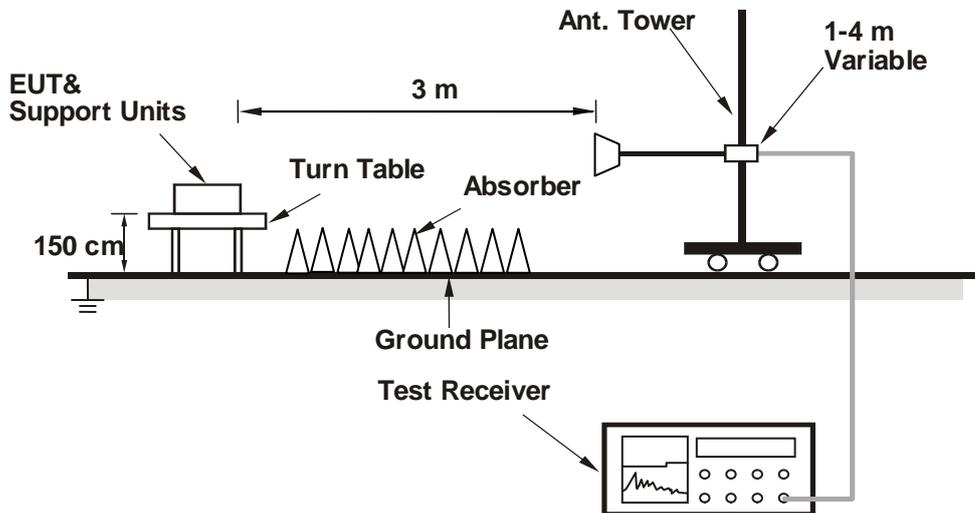

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.6.5 Test Results

LTE Band 26

Channel Bandwidth: 1.4 MHz / QPSK

Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2018-03-30

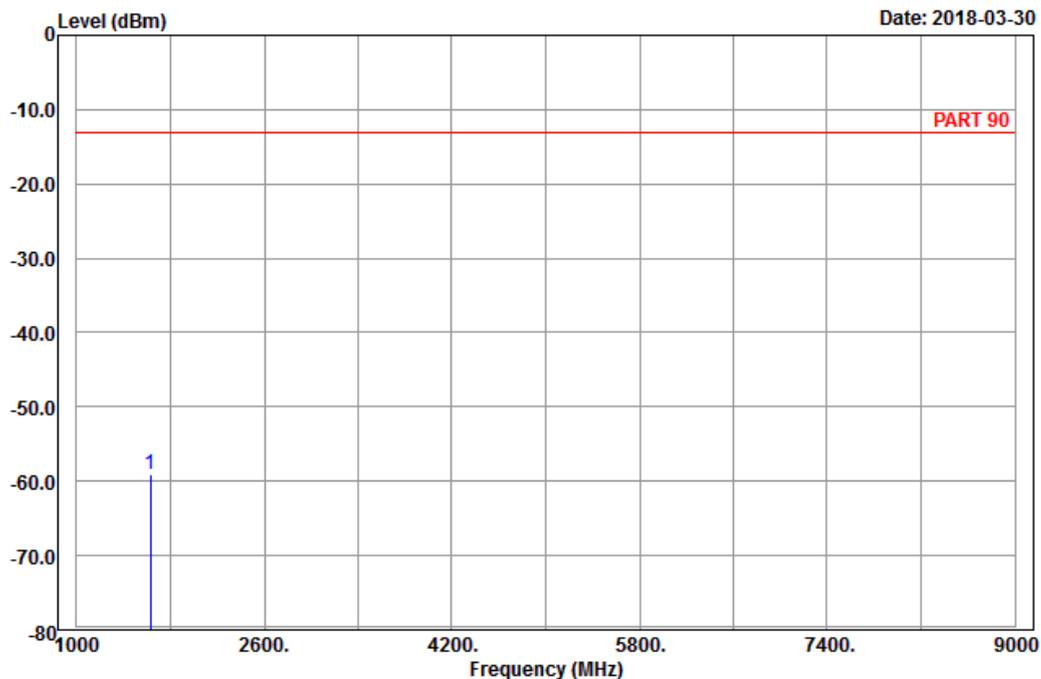

Site : 966 chamber 1  
 Condition: PART 90 Horizontal  
 Remark : LTE\_Band 26\_Link\_CH26697  
 Tested by: Charles Hsiao


	Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor Remark
MHz	dBm	dBm	dBm	dB	dB
1 pp 1629.40	-59.01	-66.57	-13.00	-46.01	7.56 Peak



A D T

Data: 6

Date: 2018-03-30

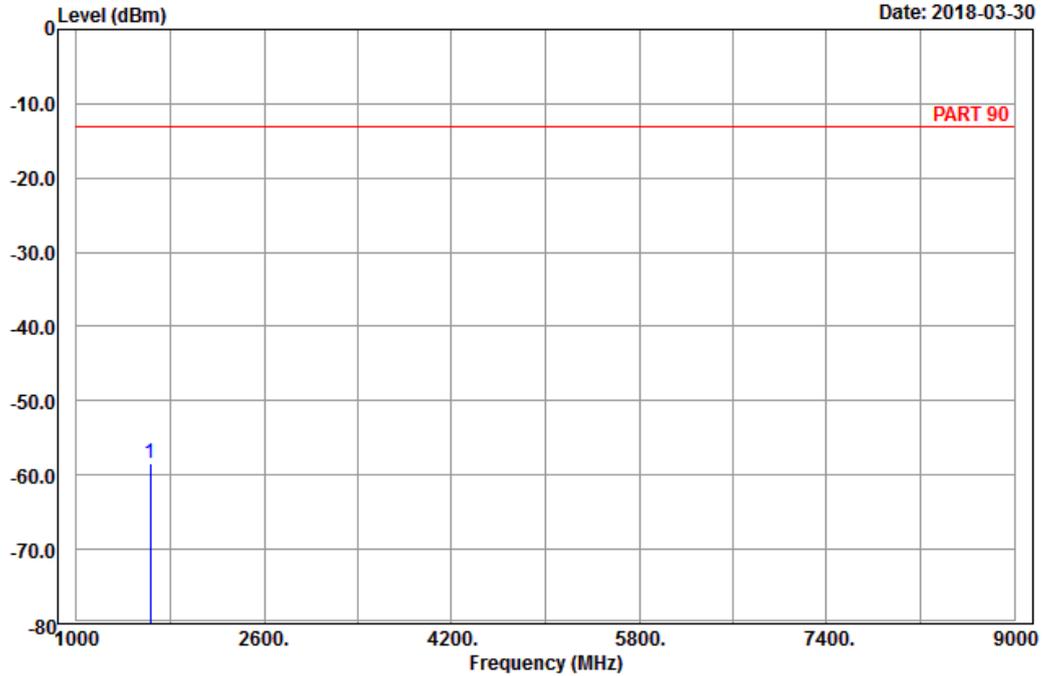

Site : 966 chamber 1  
 Condition: PART 90 Vertical  
 Remark : LTE\_Band 26\_Link\_CH26697  
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	pp 1629.40	-58.44	-66.00	-13.00	-45.44	7.56	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2018-03-30

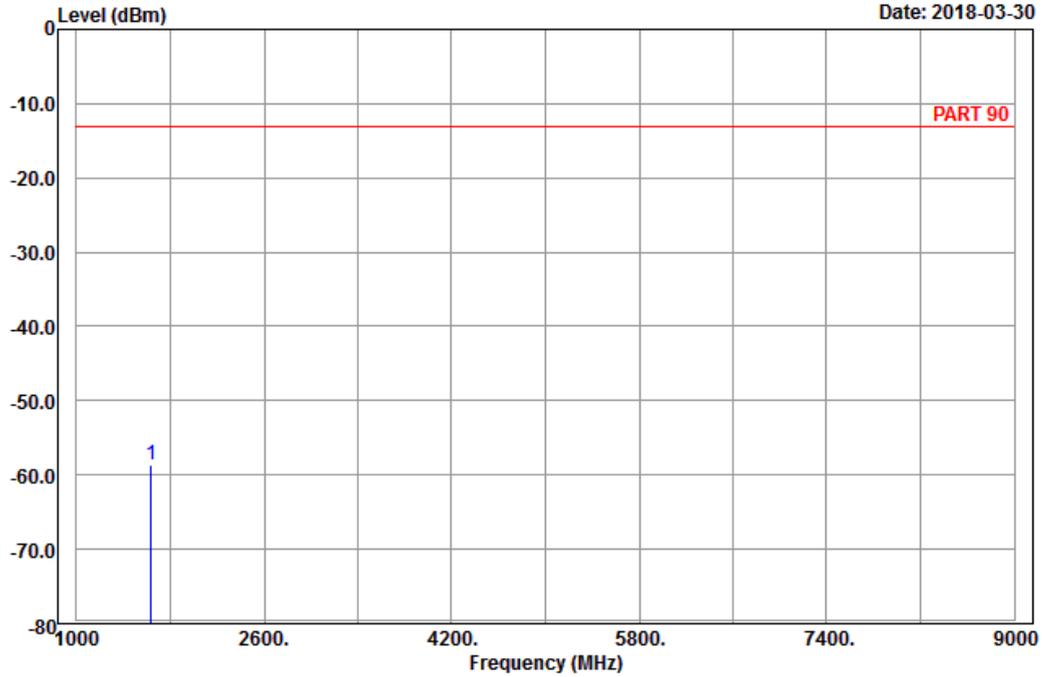

Site : 966 chamber 1  
 Condition: PART 90 Horizontal  
 Remark : LTE\_Band 26\_Link\_CH26740  
 Tested by: Charles Hsiao


Freq	Level	Read Level	Limit	Over	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1638.00	-58.67	-66.23	-13.00	-45.67	7.56	Peak



A D T

Data: 6

Date: 2018-03-30

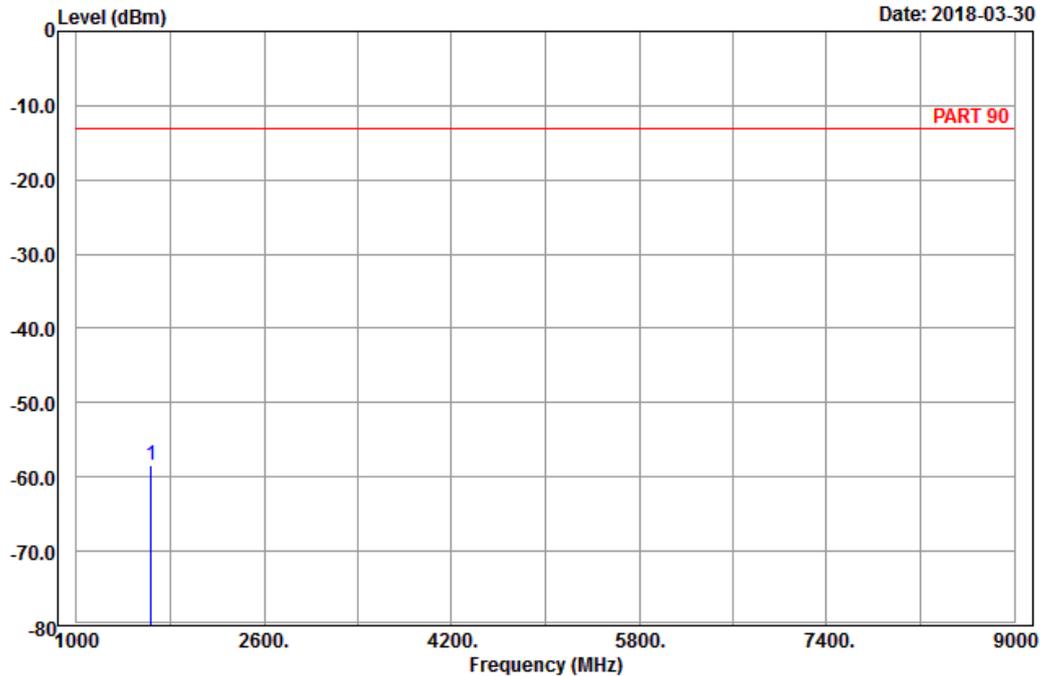

Site : 966 chamber 1  
 Condition: PART 90 Vertical  
 Remark : LTE\_Band 26\_Link\_CH26740  
 Tested by: Charles Hsiao

Freq	Level	Read Level	Limit	Over	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1638.00	-58.44	-66.00	-13.00	-45.44	7.56	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2018-03-30

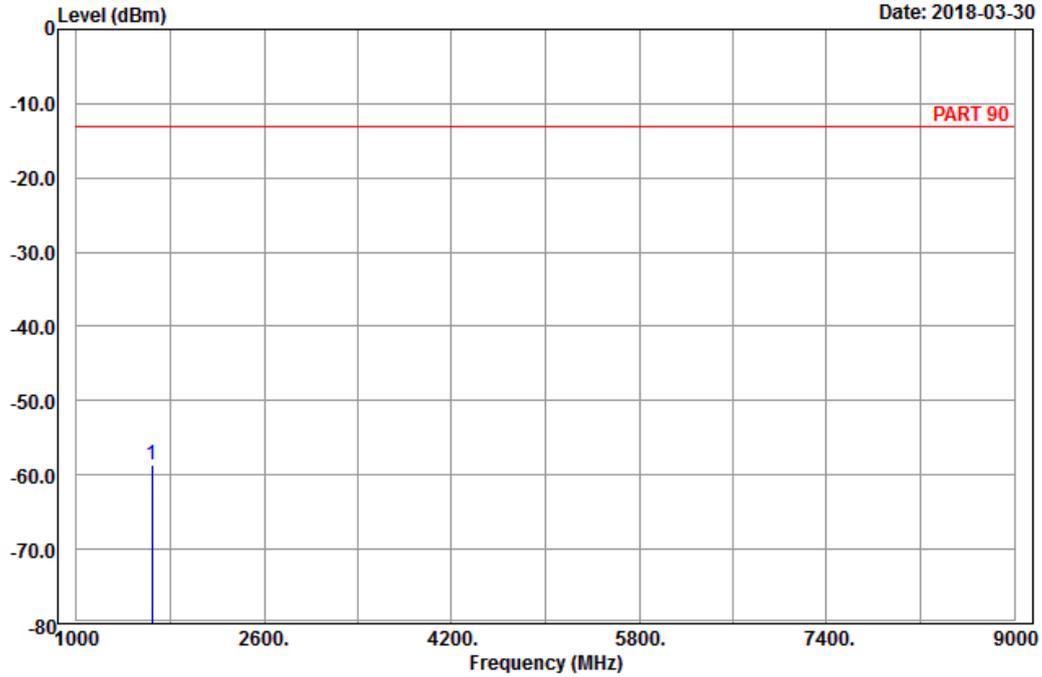

Site : 966 chamber 1  
 Condition: PART 90 Horizontal  
 Remark : LTE\_Band 26\_Link\_CH26783  
 Tested by: Charles Hsiao


Freq	Level	Read Level	Limit	Over	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1646.60	-58.55	-66.28	-13.00	-45.55	7.73	Peak



A D T

Data: 6

Date: 2018-03-30

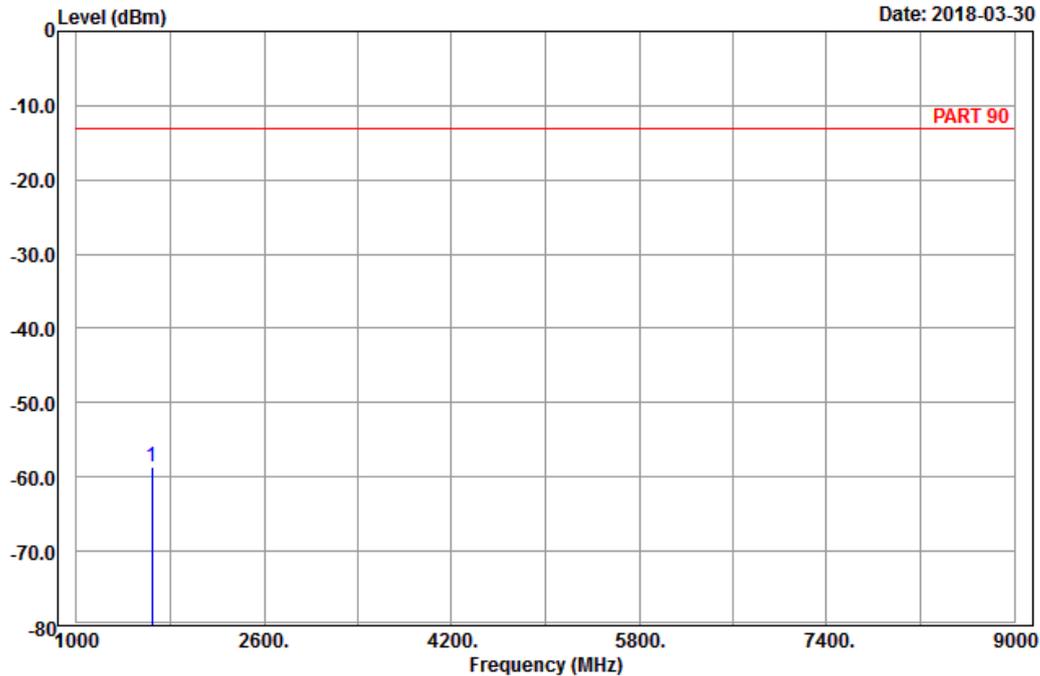

Site : 966 chamber 1  
 Condition: PART 90 Vertical  
 Remark : LTE\_Band 26\_Link\_CH26783  
 Tested by: Charles Hsiao

Freq	Level	Read Level	Limit	Over	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1646.60	-58.74	-66.47	-13.00	-45.74	7.73	Peak

Channel Bandwidth: 5 MHz / QPSK  
 Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2018-03-30

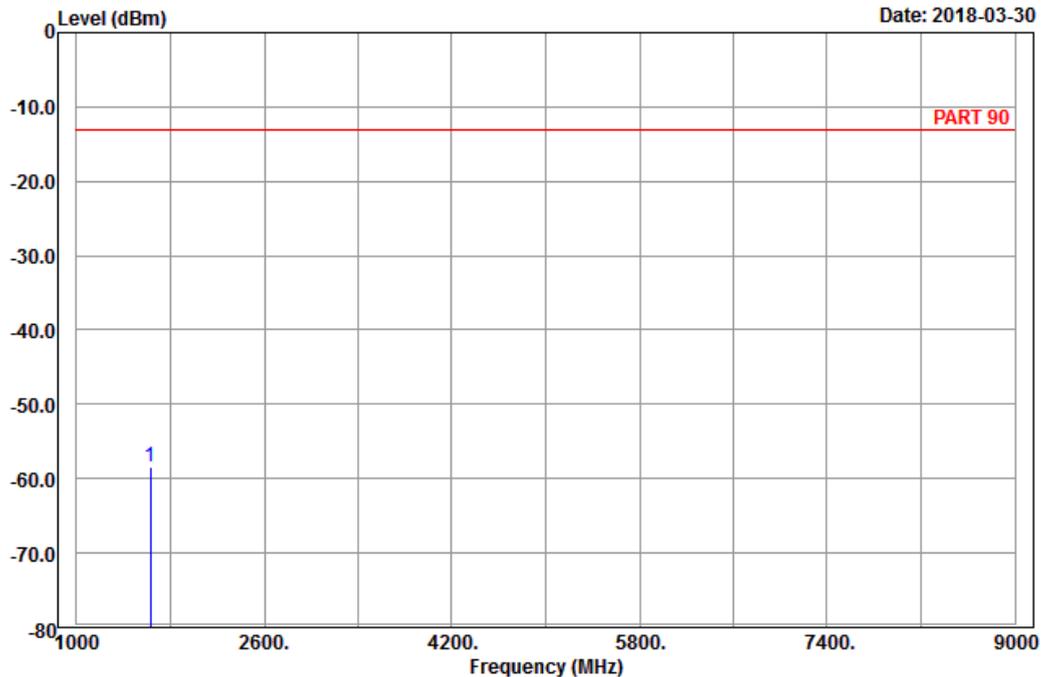

Site : 966 chamber 1  
 Condition: PART 90 Horizontal  
 Remark : LTE\_Band 26\_Link\_CH26715  
 Tested by: Karl Lee


	Read	Limit	Over			
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1633.00	-58.42	-65.98	-13.00	-45.42	7.56	Peak



A D T

Data: 6

Date: 2018-03-30

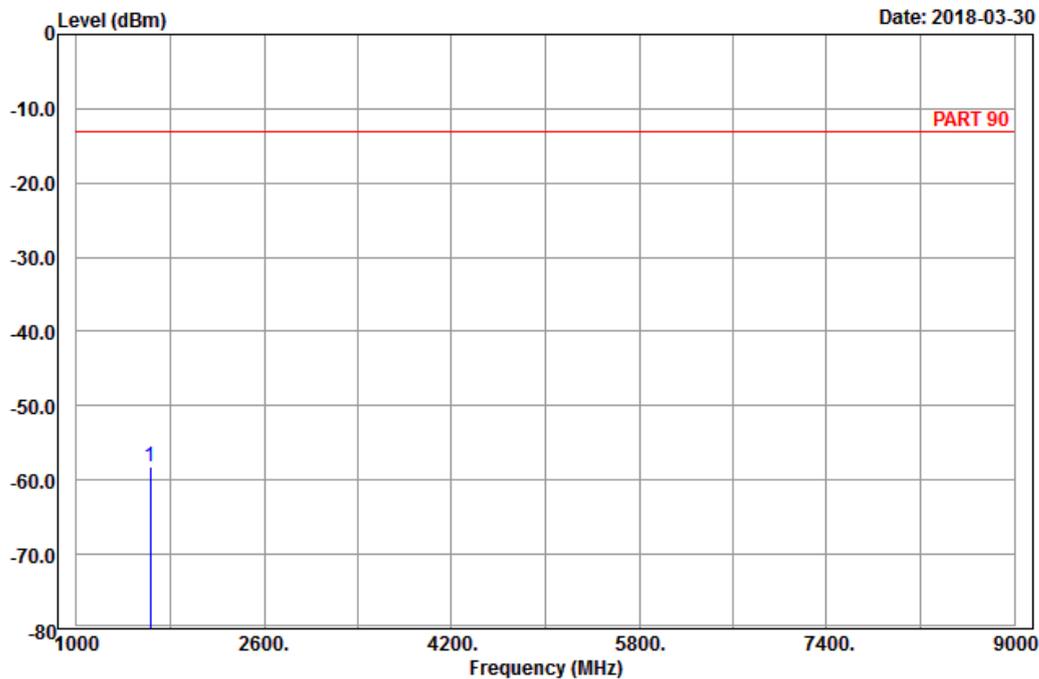

Site : 966 chamber 1  
 Condition: PART 90 Vertical  
 Remark : LTE\_Band 26\_Link\_CH26715  
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	pp 1633.00	-58.21	-65.77	-13.00	-45.21	7.56	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2018-03-30

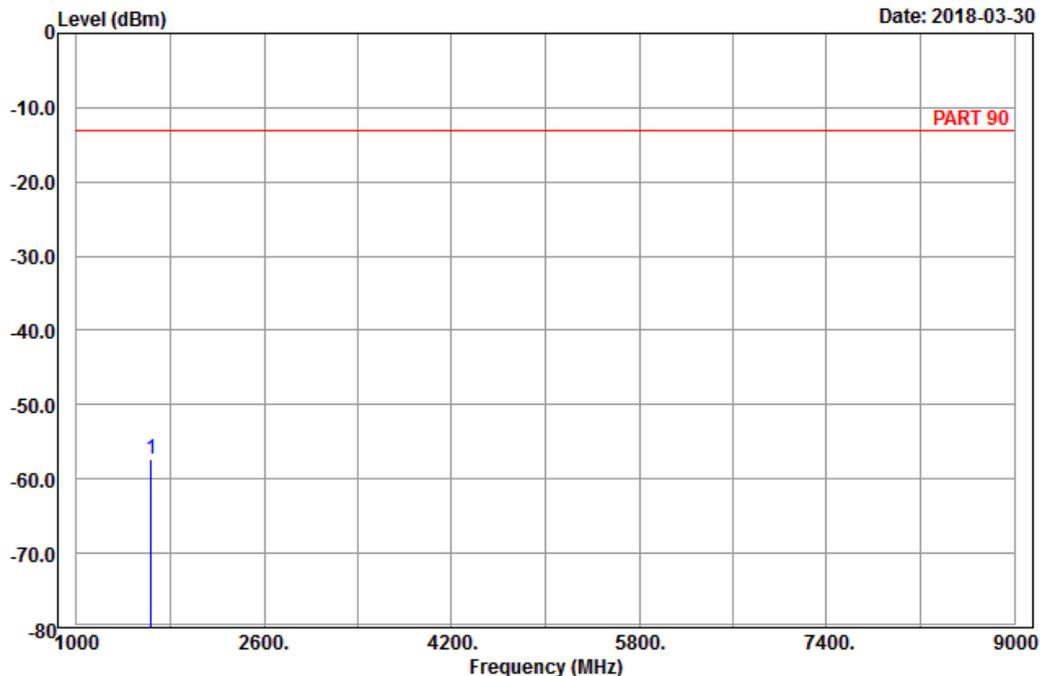

Site : 966 chamber 1  
 Condition: PART 90 Horizontal  
 Remark : LTE\_Band 26\_Link\_CH26740  
 Tested by: Karl Lee


	Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor Remark
MHz	dBm	dBm	dBm	dB	dB
1 pp 1638.00	-57.41	-64.97	-13.00	-44.41	7.56 Peak



A D T

Data: 6

Date: 2018-03-30

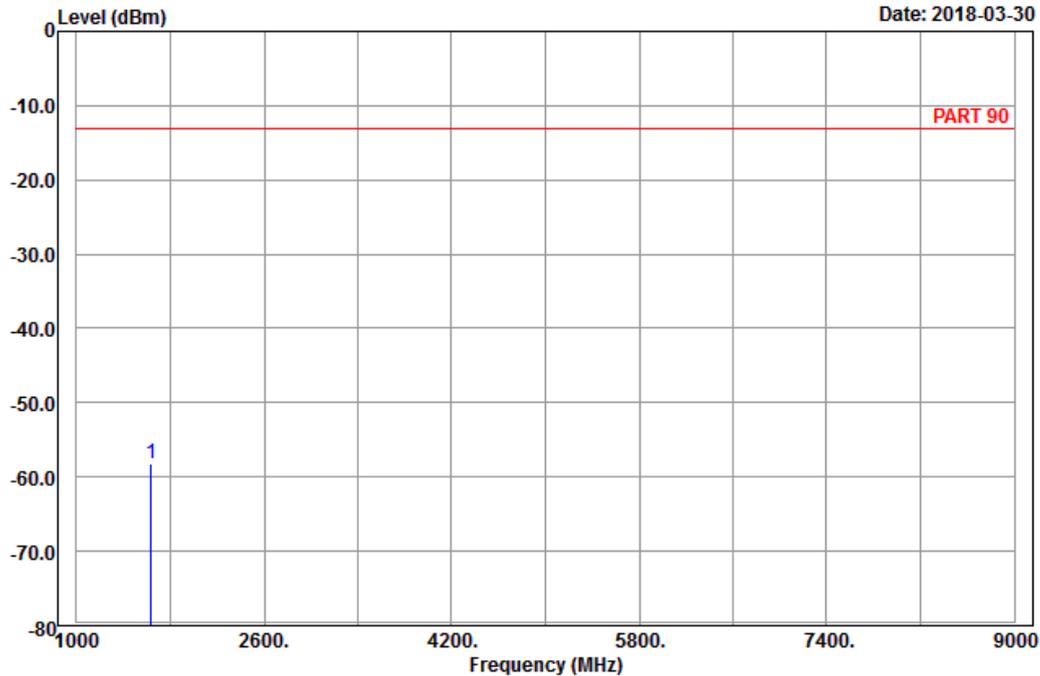

Site : 966 chamber 1  
 Condition: PART 90 Vertical  
 Remark : LTE\_Band 26\_Link\_CH26740  
 Tested by: Karl Lee

Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1638.00	-58.17	-65.73	-13.00	-45.17	7.56	Peak

# High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2018-03-30

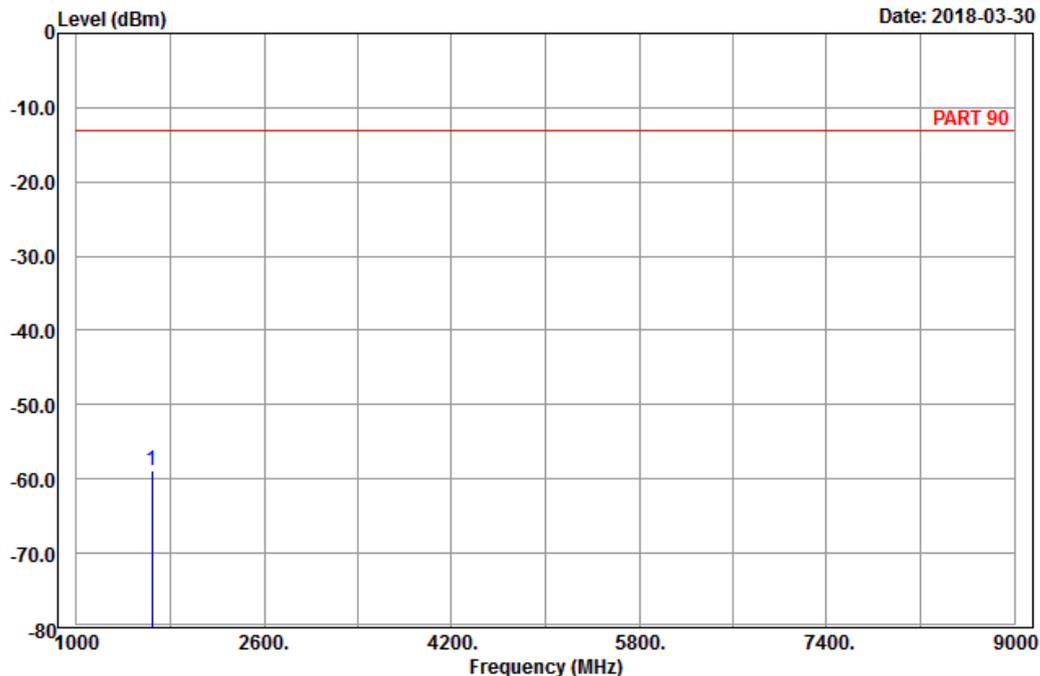

Site : 966 chamber 1  
 Condition: PART 90 Horizontal  
 Remark : LTE\_Band 26\_Link\_CH26765  
 Tested by: Karl Lee


	Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor Remark
MHz	dBm	dBm	dBm	dB	dB
1 pp 1643.00	-58.92	-66.65	-13.00	-45.92	7.73 Peak



A D T

Data: 6

Date: 2018-03-30

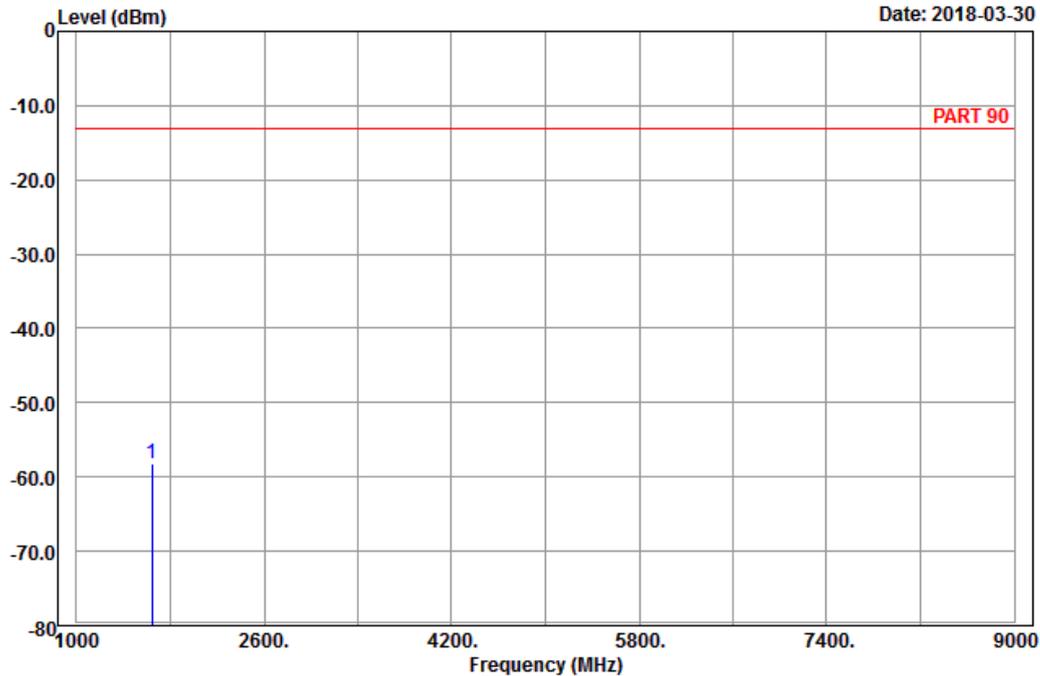

Site : 966 chamber 1  
 Condition: PART 90 Vertical  
 Remark : LTE\_Band 26\_Link\_CH26765  
 Tested by: Karl Lee

Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1643.00	-58.22	-65.95	-13.00	-45.22	7.73	Peak

Channel Bandwidth: 10 MHz / QPSK




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2018-03-30

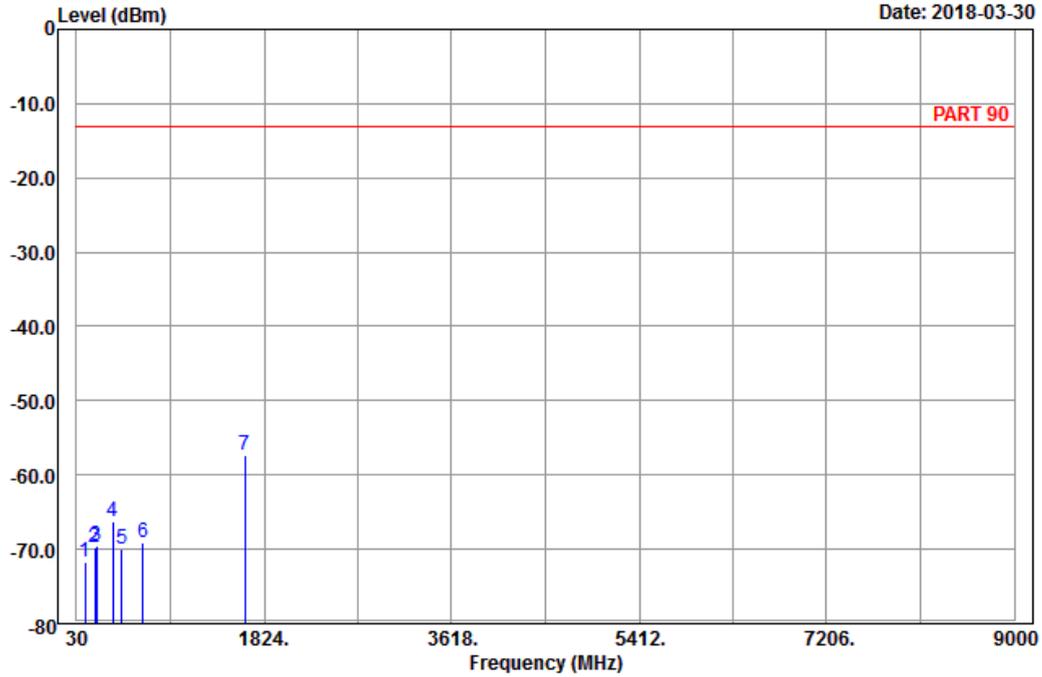

Site : 966 chamber 1  
 Condition: PART 90 Horizontal  
 Remark : LTE\_Band 26\_Link\_CH26740  
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	113.43	-71.82	-63.13	-13.00	-58.82	-8.69	Peak
2	208.74	-69.79	-63.72	-13.00	-56.79	-6.07	Peak
3	221.16	-69.57	-63.67	-13.00	-56.57	-5.90	Peak
4	379.10	-66.26	-62.43	-13.00	-53.26	-3.83	Peak
5	461.00	-69.88	-65.73	-13.00	-56.88	-4.15	Peak
6	665.40	-69.02	-68.81	-13.00	-56.02	-0.21	Peak
7 pp	1638.00	-57.34	-64.90	-13.00	-44.34	7.56	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-03-30

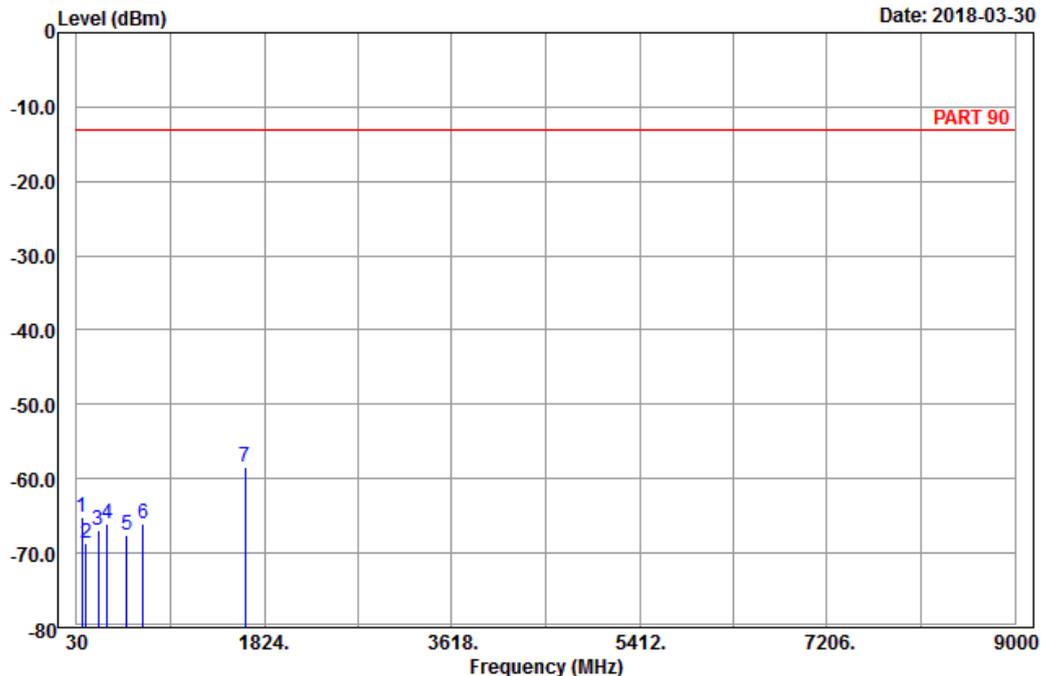

Site : 966 chamber 1  
 Condition: PART 90 Vertical  
 Remark : LTE\_Band 26\_Link\_CH26740  
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	84.27	-65.15	-53.82	-13.00	-52.15	-11.33	Peak
2	121.80	-68.73	-60.60	-13.00	-55.73	-8.13	Peak
3	238.98	-66.84	-61.18	-13.00	-53.84	-5.66	Peak
4	322.40	-66.13	-60.43	-13.00	-53.13	-5.70	Peak
5	509.30	-67.57	-62.93	-13.00	-54.57	-4.64	Peak
6	666.80	-65.97	-65.76	-13.00	-52.97	-0.21	Peak
7 pp	1638.00	-58.47	-66.03	-13.00	-45.47	7.56	Peak

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---