

FCC RF Test Report

APPLICANT : Hewlett-Packard Company
EQUIPMENT : Notebook PC
BRAND NAME : HP
MODEL NAME : HSTNN-W91C
FCC ID : B94HNW91CSWWH
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
CLASSIFICATION : PCS Licensed Transmitter (PCB)

The product was received on Nov. 21, 2012 and completely tested on Feb. 07, 2013. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-C-2004 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test	6
1.5 Maximum ERP/EIRP Power and Frequency Tolerance	7
1.6 Testing Site.....	7
1.7 Applied Standards	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Test Mode.....	9
2.2 Connection Diagram of Test System	11
2.3 Support Unit used in test configuration and system	11
3 TEST RESULT	12
3.1 Conducted Output Power Measurement and Radiated Power Measurement.....	12
3.2 Peak-to-Average Ratio	16
3.3 Field Strength of Spurious Radiation Measurement	28
3.4 Frequency Stability Measurement.....	49
4 LIST OF MEASURING EQUIPMENT	52
5 UNCERTAINTY OF EVALUATION	53
APPENDIX A. PHOTOGRAPHS OF EUT	
APPENDIX B. SETUP PHOTOGRAPHS	

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG2N2103-01	Rev. 01	Initial issue of report	Jan. 03, 2013
FG2N2103-01	Rev. 02	Update report for adding Peak-to-Average Ratio	Feb. 01, 2013
FG2N2103-01	Rev. 03	Revising Peak-to-Average Ratio and CDMA2000 BC0 ERP, adding Frequency Stability Measurement	Feb. 07, 2013

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	§2.1046	RSS-132 (4.4) RSS-133 (4.1) RSS-139 (6.4)	Conducted Output Power	N/A	PASS	-
3.1	§22.913(a)(2)	RSS-132 (4.4) SRSP-503 (5.1.3)	Effective Radiated Power	< 7 Watts	PASS	-
3.1	§24.232(c)	RSS-133 (6.4) SRSP-510 (5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
3.1	§27.50(d)(4)	RSS-139 (6.4) SRSP-513 (5.1.2)	Equivalent Isotropic Radiated Power	< 1 Watts	PASS	-
3.2	§24.232(d) §27.50(d)(5)	RSS-133 (6.4) RSS-139 (6.4)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.3	§2.1053 §22.917(a) §24.238(a) §27.53(h)	RSS-132 (4.5.1) RSS-133 (6.5.1) RSS-139 (6.5)	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	Under limit 8.79 dB at 2509.000 MHz
3.4	§2.1055 §27.54	RSS-132 (4.3) RSS-133 (6.3) RSS-139 (6.3)	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-

1 General Description

1.1 Applicant

Hewlett-Packard Company

3000 Hanover Street, Palo Alto, California 94304, USA

1.2 Manufacturer

Wistron Corporation

21F., No. 88, Sec.1, Xintai 5th Rd., Xizhi Dist., New Taipei City 22181, Taiwan (R.O.C.)

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Notebook PC
Brand Name	HP
Model Name	HSTNN-W91C
Integrated Module	Brand Name : Sierra Model Name : MC8355
FCC ID	B94HNW91CSWWH
EUT supports Radios application	CDMA/EV-DO/GSM/EGPRS/WCDMA(Rel.99)/HSPA(Rel.6)/NFC
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz CDMA2000 BC0: 824.70 MHz ~ 848.31 MHz CDMA2000 BC1: 1851.25 MHz ~ 1908.75 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band IV : 2112.4 MHz ~ 2152.6 MHz WCDMA Band II : 1932.4 MHz ~ 1987.6 MHz CDMA2000 BC0: 869.70 MHz ~ 893.31 MHz CDMA2000 BC1: 1931.25 MHz ~ 1988.75 MHz
Maximum Output Power to Antenna	GSM850 : 31.56 dBm GSM1900 : 29.92 dBm WCDMA Band V : 24.06 dBm WCDMA Band IV : 24.07 dBm WCDMA Band II : 24.15 dBm CDMA2000 BC0 : 24.17 dBm CDMA2000 BC1 : 24.20 dBm
Antenna Type	PIFA Antenna
Type of Modulation for Uplink	GPRS: GMSK EDGE: GMSK / 8PSK WCDMA: QPSK HSDPA: QPSK HSUPA: QPSK CDMA2000 : QPSK CDMA2000 1xEV-DO : QPSK

1.5 Maximum ERP/EIRP Power and Frequency Tolerance

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (% , Hz, ppm)
Part 22	GSM850 GPRS Class 8	GMSK	0.5534	*
Part 22	GSM850 EDGE Class 8	8PSK	0.1489	*
Part 22	WCDMA Band V RMC 12.2Kbps	QPSK	0.0984	*
Part 22	CDMA2000 BC0 1xRTT	QPSK	0.1009	*
Part 24	GSM1900 GPRS Class 8	GMSK	1.1912	*
Part 24	GSM1900 EDGE Class 8	8PSK	0.5035	*
Part 24	WCDMA Band II RMC 12.2Kbps	QPSK	0.3155	*
Part 24	CDMA2000 BC1 1xRTT	QPSK	0.3192	*
Part 27	WCDMA Band IV RMC 12.2Kbps	QPSK	0.2979	0.03 ppm

Note: “*” Please refer to module report.

1.6 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	TH02-HY	03CH05-HY	722060/4086B-1

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ FCC KDB 412172 D01 Determining ERP and ERIP v01
- ♦ IC RSS-132 Issue 2
- ♦ IC RSS-133 Issue 5
- ♦ IC RSS-139 Issue 2
- ♦ IC RSS-Gen Issue 3
- ♦ NOTICE 2012-DRS0126

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. Per the section 2.2.3 of Notice of 2012-DRS0126, "Receivers Excluded from Industry Canada Requirements", only radio communication receivers operating in stand-alone mode within the band 30-960 MHz and scanner receivers are subject to Industry Canada requirements.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes in Tablet PC configurations and one test plane in Laptop PC configuration to find out the worst emission.

Frequency range investigated for radiated emission is as follows:

1. 30 MHz to 9000 MHz for GSM850, WCDMA Band V and CDMA2000 BC0.
2. 30 MHz to 18000 MHz for WCDMA Band IV.
3. 30 MHz to 19000 MHz for GSM1900, WCDMA Band II and CDMA2000 BC1.

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	■ GPRS Class 8 Link ■ EDGE Class 8 Link	No required
GSM 1900	■ GPRS Class 8 Link ■ EDGE Class 8 Link	■ GPRS Class 8 Link ■ EDGE Class 8 Link
WCDMA Band V	■ RMC 12.2Kbps Link	No required
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
CDMA2000 BC0	■ 1xRTT Link Mode	No required
CDMA2000 BC1	■ 1xRTT Link Mode	■ 1xRTT Link Mode

Note:

1. The maximum power levels are GPRS multi-slot class 8 mode for GMSK link, EDGE multi-slot class 8 mode for 8PSK link, RMC 12.2Kbps mode for WCDMA band V, RMC 12.2Kbps mode for WCDMA band IV, RMC 12.2Kbps mode for WCDMA band II, 1xRTT RC1+SO55 mode for CDMA2000 BC0, and 1xRTT RC1+SO55 mode for CDMA2000 BC1 on QPSK Link only these modes were used for all tests.
2. All test items were performed with Adapter 2.


The conducted power tables are as follows:

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Modulation	GMSK			GMSK		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880	1909.8
GPRS Class 8	31.56	31.38	31.32	29.92	29.66	29.23
GPRS Class 10	31.37	31.22	31.17	29.84	29.63	29.11
Band	GSM850			GSM1900		
Modulation	8PSK			8PSK		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880	1909.8
EGPRS Class 8	25.85	25.86	25.85	26.18	25.96	25.80
EGPRS Class 10	25.80	25.79	25.81	26.13	25.91	25.97

Conducted Power (*Unit: dBm)									
Band	WCDMA Band V			WCDMA Band II			WCDMA Band IV		
Modulation	QPSK			QPSK			QPSK		
Tx Channel	4132	4182	4233	9262	9400	9538	1312	1413	1513
Rx Channel	4357	4408	4458	9662	9800	9938	1537	1638	1738
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
RMC 12.2K	24.02	24.01	24.06	24.12	24.15	23.86	24.07	24.06	24.06
HSDPA Subtest-1	23.40	23.53	23.56	23.70	23.76	23.49	23.50	23.38	23.31
HSDPA Subtest-2	23.26	23.35	23.45	23.58	23.60	23.43	23.44	23.33	23.23
HSDPA Subtest-3	23.02	23.08	23.14	23.17	23.25	23.06	23.08	22.93	22.87
HSDPA Subtest-4	22.91	22.95	23.08	23.08	23.13	23.01	22.99	22.86	22.79
HSUPA Subtest-1	23.43	23.63	23.35	23.23	23.55	23.49	23.58	23.63	23.51
HSUPA Subtest-2	22.32	22.29	22.38	22.28	22.55	22.46	22.21	22.26	22.23
HSUPA Subtest-3	22.24	22.36	22.31	22.33	22.70	22.59	22.48	22.55	22.41
HSUPA Subtest-4	22.68	22.60	22.66	22.65	22.94	22.81	22.62	22.68	22.59
HSUPA Subtest-5	23.34	23.53	23.31	23.38	23.68	23.53	23.71	23.77	23.68

Conducted Power (*Unit: dBm)						
Band	CDMA2000 BC0			CDMA2000 BC1		
Modulation	QPSK			QPSK		
Channel	1013	384	777	25	600	1175
Frequency	824.7	836.52	848.31	1851.25	1880	1908.75
1xRTT RC1+SO55	24.14	24.17	24.11	24.20	24.05	23.96
1xRTT RC3+SO55	24.12	24.13	24.10	24.16	24.02	23.87
1xRTT RC3+SO32 (+F-SCH)	24.13	24.12	24.09	24.15	24.03	23.86
1xRTT RC3+SO32 (+SCH)	24.10	24.13	24.08	24.15	24.05	23.89
1xEV-DO RTAP 153.6K	24.16	24.09	24.15	24.19	24.09	24.04
1xEV-DO RETAP 4096K	24.14	24.10	24.14	24.18	24.08	23.96

2.2 Connection Diagram of Test System

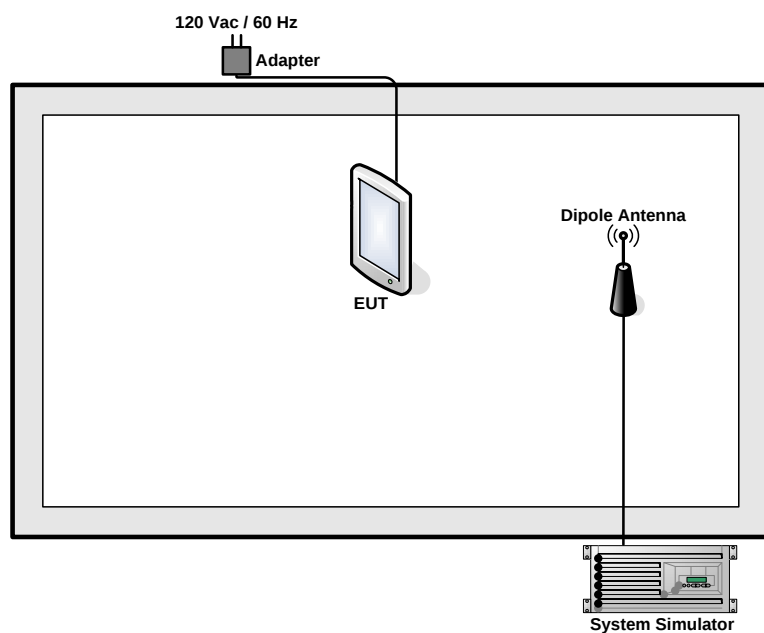

Remark: The EUT is set in Tablet PC and Laptop PC configurations during test.

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU200	N/A	N/A	Unshielded, 1.8 m

3 Test Result

3.1 Conducted Output Power Measurement and Radiated Power Measurement

3.1.1 Description of the Conducted Output Power Measurement, and Radiated Power Measurement, Effective Radiated Power (ERP) and Equivalent Isotropically Radiated Power (EIRP)

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported. And, then the section 2.0 of FCC KDB 412172 Determining ERP and ERIP is used to determine the Radiated Power Measurement.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure the maximum burst average power for GSM and maximum average power for WCDMA, and CDMA2000 modes.
6. The procedure section 2.0 of FCC KDB 412172 is used to determine the Radiated Power Measurement.

3.1.4 Test Setup

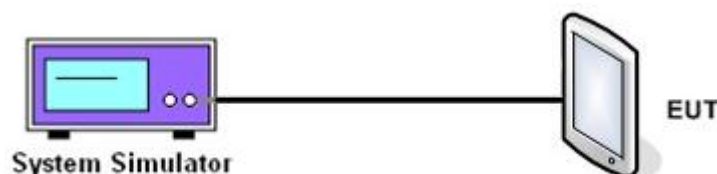

3.1.5 Test Result of Conducted Output Power Measurement and Radiated Power Measurement

Cellular Band ($G_T - L_C = -1.98$ dB)									
Modes	GSM850 (GPRS Class 8)			GSM850 (EDGE Class 8)			WCDMA Band V (RMC 12.2Kbps)		
Modulation	GMSK			8PSK			QPSK		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	826.4	836.4	846.6
Conducted Power (dBm)	31.56	31.38	31.32	25.85	25.86	25.85	24.02	24.01	24.06
Conducted Power (Watts)	1.43	1.37	1.36	0.38	0.39	0.38	0.25	0.25	0.25
ERP(dBm)	27.43	27.25	27.19	21.72	21.73	21.72	19.89	19.88	19.93
ERP(Watts)	0.5534	0.5309	0.5236	0.1486	0.1489	0.1486	0.0975	0.0973	0.0984

PCS Band ($G_T - L_C = 0.84$ dB)									
Modes	GSM1900 (GPRS Class 8)			GSM1900 (EDGE Class 8)			WCDMA Band II (RMC 12.2Kbps)		
Modulation	GMSK			8PSK			QPSK		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Conducted Power (dBm)	29.92	29.66	29.23	26.18	25.96	25.80	24.12	24.15	23.86
Conducted Power (Watts)	0.98	0.92	0.84	0.41	0.39	0.38	0.26	0.26	0.24
EIRP(dBm)	30.76	30.5	30.07	27.02	26.8	26.64	24.96	24.99	24.7
EIRP(Watts)	1.1912	1.1220	1.0162	0.5035	0.4786	0.4613	0.3133	0.3155	0.2951

AWS Band ($G_T - L_C = 0.67$ dB)			
Mode	WCDMA Band IV (RMC 12.2Kbps)		
Modulation	QPSK		
Channel	1312(Low)	1413 (Mid)	1513 (High)
Frequency(MHz)	1712.4	1732.6	1752.6
Conducted Power (dBm)	24.07	24.06	24.06
Conducted Power (Watts)	0.26	0.25	0.25
EIRP(dBm)	24.74	24.73	24.73
EIRP(Watts)	0.2979	0.2972	0.2972

Cellular Band ($G_T - L_C = -1.98$ dB)			
CDMA2000 BC0			
Mode	CDMA 2000 1xRTT		
Test Status	RC1+SO55		
Modulation	QPSK		
Channel	1013 (Low)	384 (Mid)	777 (High)
Frequency (MHz)	824.70	836.52	848.31
Conducted Power (dBm)	24.14	24.17	24.11
Conducted Power (Watts)	0.26	0.26	0.26
ERP(dBm)	20.01	20.04	19.98
ERP(Watts)	0.1002	0.1009	0.0995

PCS Band ($G_T - L_C = 0.84$ dB)			
CDMA2000 BC1			
Mode	CDMA 2000 1xRTT		
Test Status	RC1+SO55		
Modulation	QPSK		
Channel	25 (Low)	600 (Mid)	1175 (High)
Frequency (MHz)	1851.25	1880.00	1908.75
Conducted Power (dBm)	24.20	24.05	23.96
Conducted Power (Watts)	0.26	0.25	0.25
EIRP(dBm)	25.04	24.89	24.8
EIRP(Watts)	0.3192	0.3083	0.3020

Note: maximum burst average power for GSM, maximum average power for WCDMA, and CDMA2000.

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2 Peak-to-Average Ratio

3.2.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and System Simulator via power divider.
2. For GSM/EGPRS operating modes:
 - a. Set EUT in maximum power output.
 - b. Set the RBW = 1MHz, VBW = 3MHz, Peak detector in spectrum analyzer for first trace.
 - c. Set the RBW = 1MHz, VBW = 3MHz, RMS detector in spectrum analyzer for second trace.
 - d. The wanted burst signal is triggered by spectrum analyzer, and measured respectively the peak level and Mean level without burst-off time, after system simulator synchronized with the spectrum analyzer.
3. For UMTS operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.

3.2.4 Test Setup

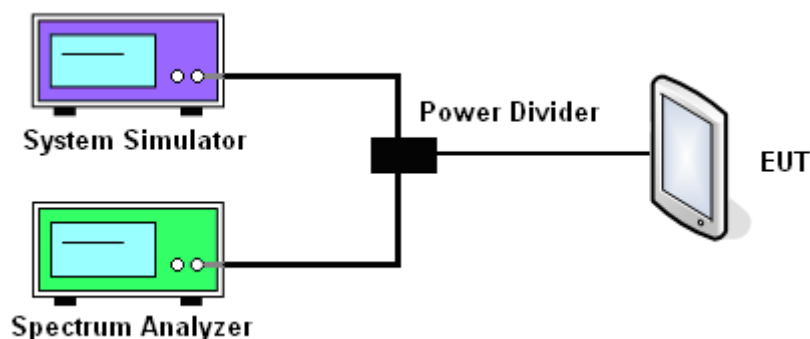

3.2.5 Test Result of Peak-to-Average Ratio

PCS Band									
Modes	GSM1900 (GPRS Class 8)			GSM1900 (EDGE Class 8)			WCDMA Band II (RMC 12.2Kbps)		
Modulation	GMSK			8PSK			QPSK		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Peak-to-Average Ratio (dB)	0.15	0.15	0.15	2.61	2.68	2.67	2.80	2.92	2.92


AWS Band			
Mode	WCDMA Band IV (RMC 12.2Kbps)		
Modulation	QPSK		
Channel	1312(Low)	1413 (Mid)	1513 (High)
Frequency (MHz)	1712.4	1732.6	1752.6
Peak-to-Average Ratio (dB)	2.84	2.64	2.92

CDMA2000 BC1			
Mode	CDMA 2000 1xRTT		
Modulation	QPSK		
Test Status	RC1+SO55		
Channel	25 (Low)	600 (Mid)	1175 (High)
Frequency (MHz)	1851.25	1880.00	1908.75
Peak-to-Average Ratio (dB)	3.84	4.32	4.12


3.2.6 Test Result (Plots) of Peak-to-Average Ratio

Band :	GSM 1900	Test Mode :	GPRS Class 8 Link (GMSK)
--------	----------	-------------	--------------------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

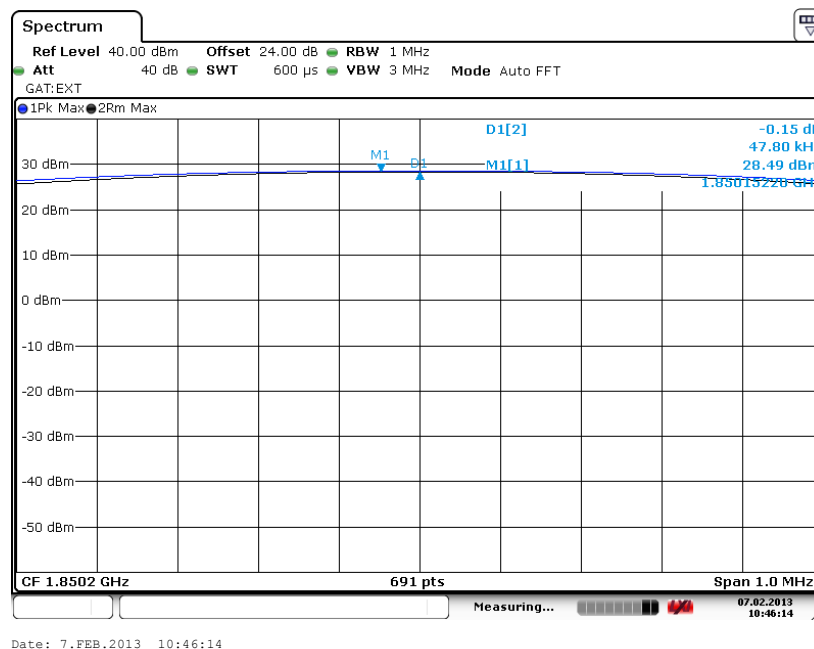


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

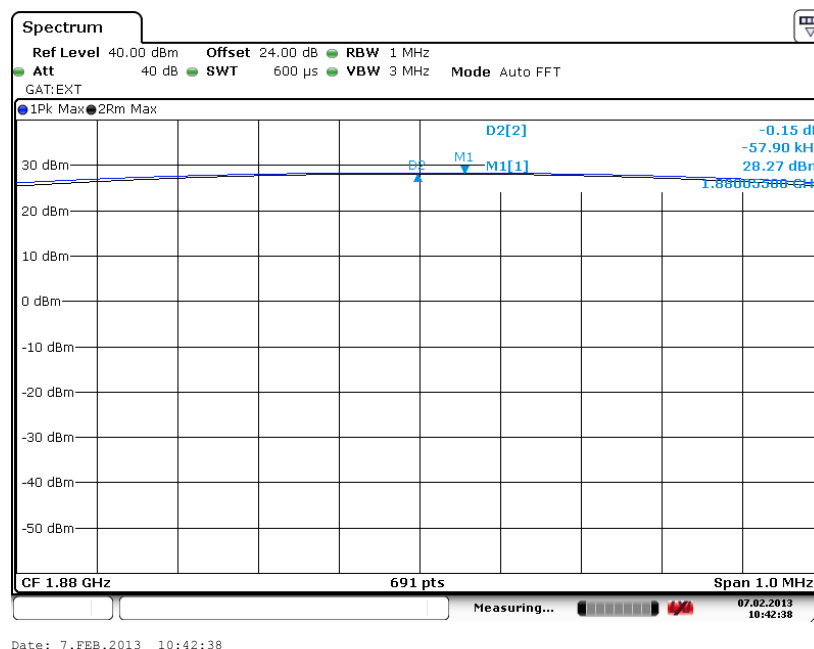



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

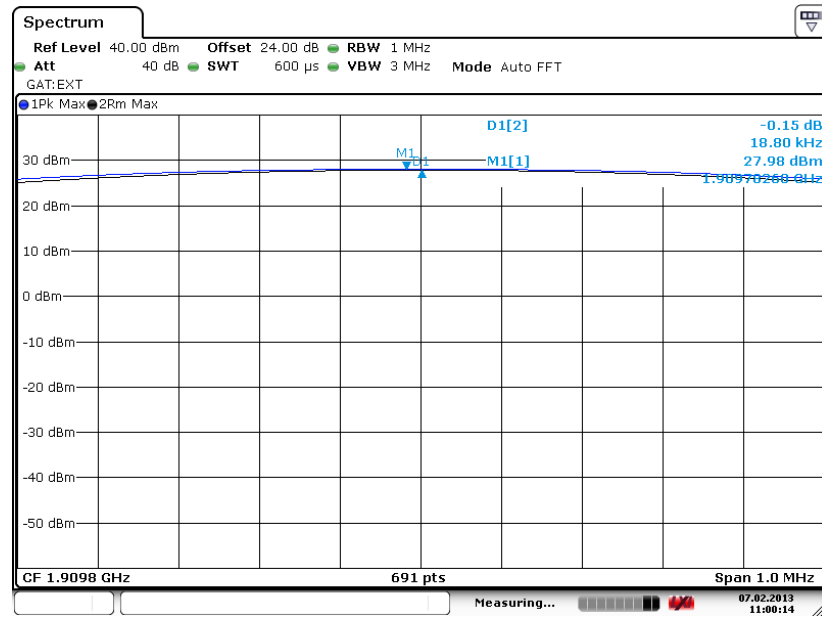


Date: 7.FEB.2013 11:00:15




Band :	GSM 1900	Test Mode :	EDGE Class 8 Link (8PSK)
--------	----------	-------------	--------------------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

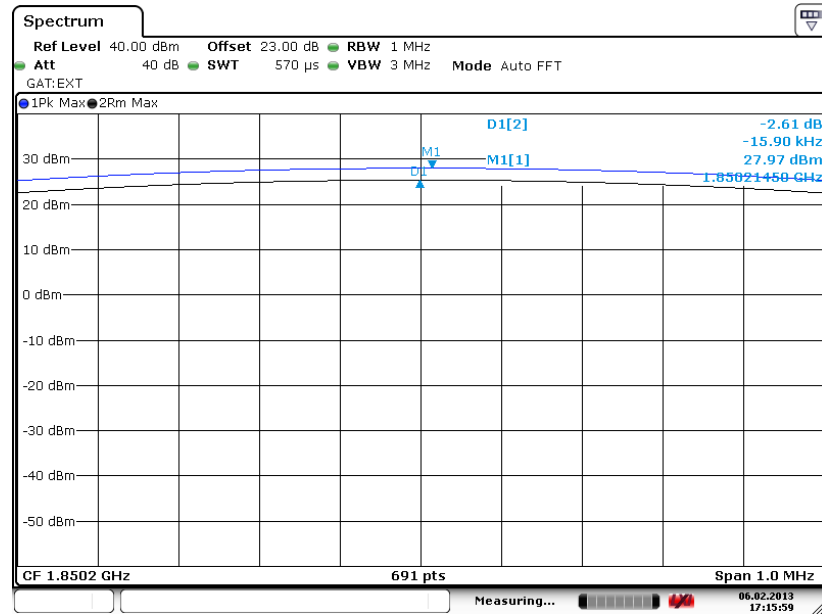

Date: 6.FEB.2013 17:15:59


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

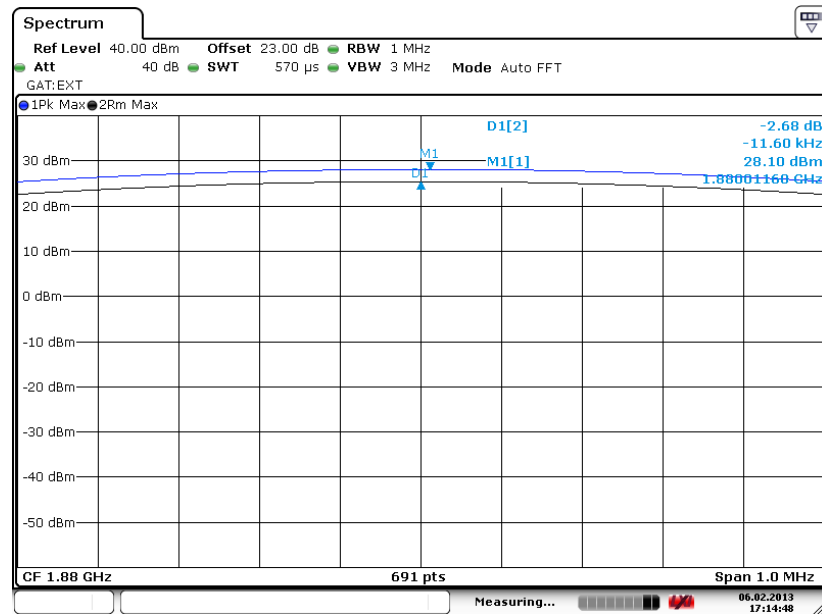

Date: 6.FEB.2013 17:14:48




Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

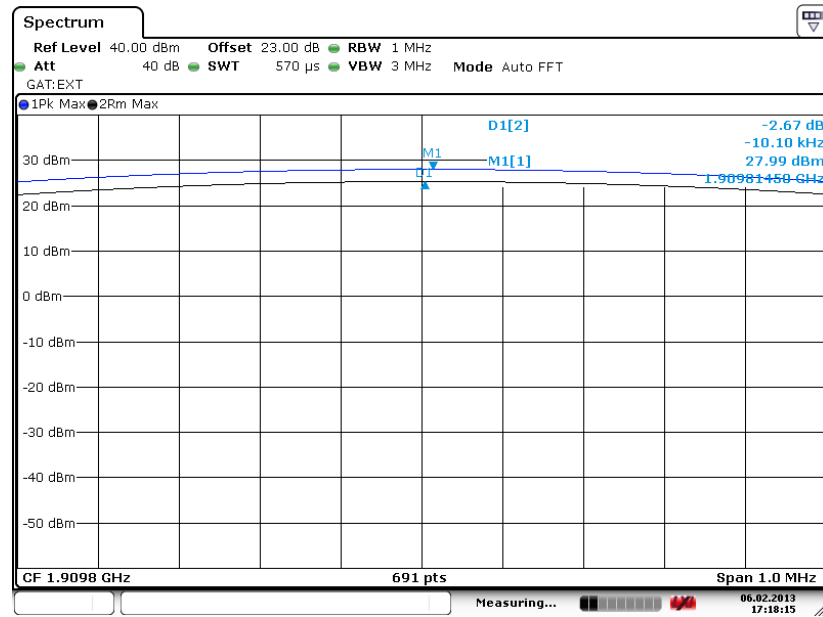

Date: 6.FEB.2013 17:18:16


Band :	WCDMA Band IV	Test Mode :	RMC 12.2Kbps Link (QPSK)
---------------	---------------	--------------------	--------------------------

Peak-to-Average Ratio on Channel 1312 (1712.4 MHz)

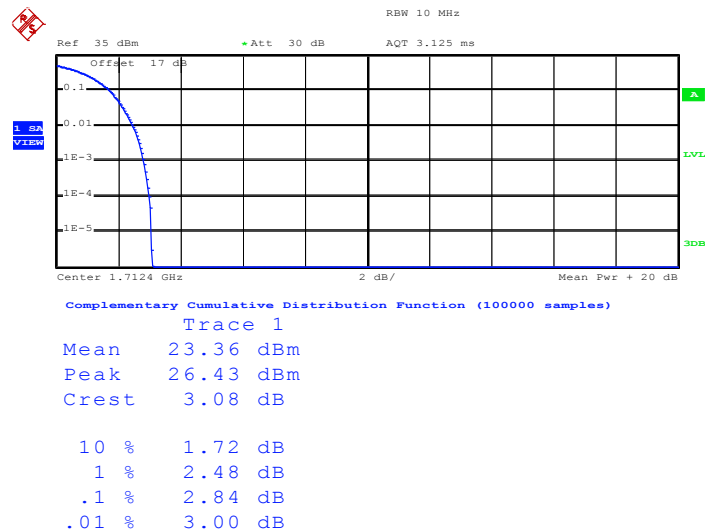


Date: 2.FEB.2013 08:46:29

Peak-to-Average Ratio on Channel 1413 (1732.6 MHz)

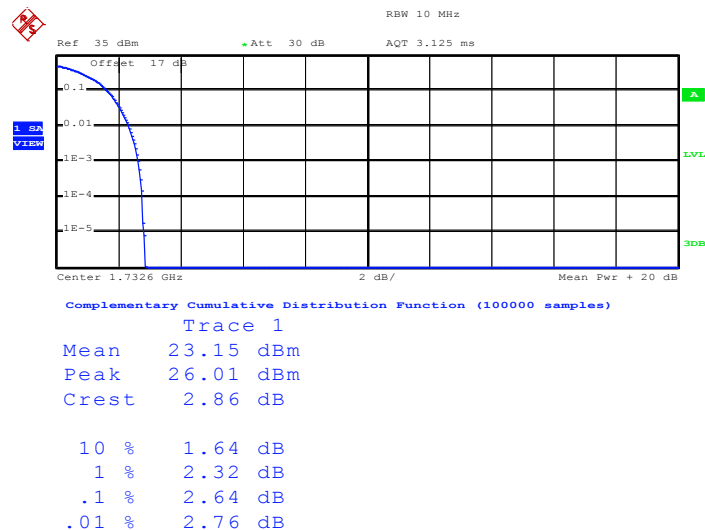

Date: 2.FEB.2013 08:45:54


Peak-to-Average Ratio on Channel 1513 (1752.6 MHz)

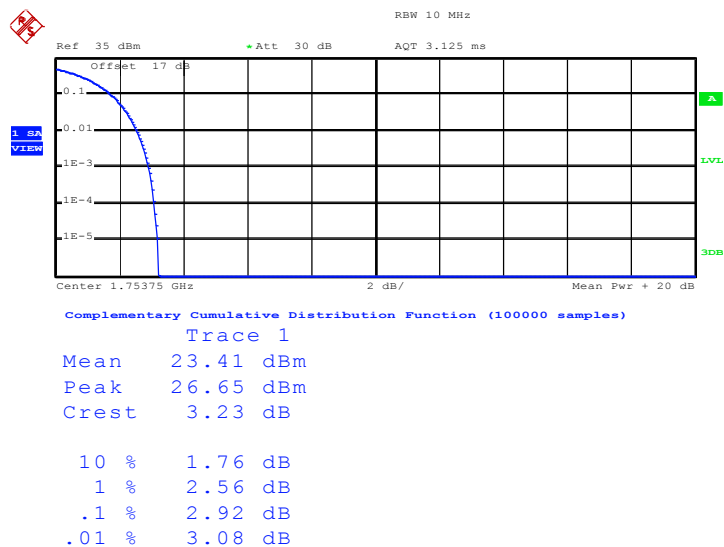

Date: 2.FEB.2013 08:47:00


Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
---------------	---------------	--------------------	--------------------------

Peak-to-Average Ratio on Channel 9262 (1852.4 MHz)

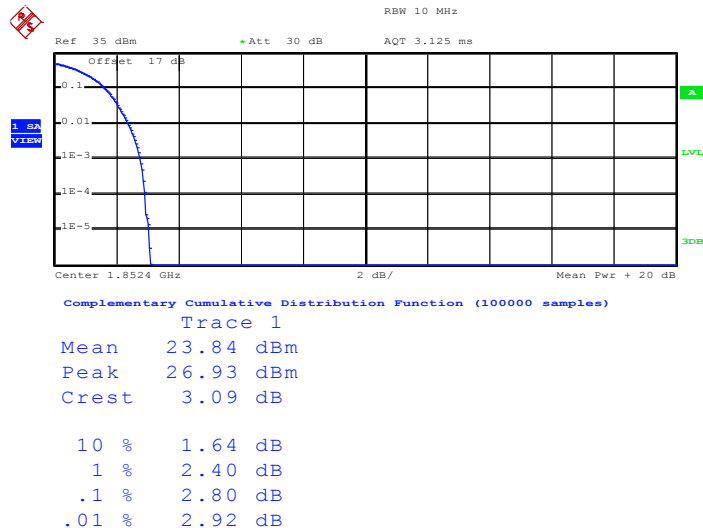


Date: 2.FEB.2013 08:49:05

Peak-to-Average Ratio on Channel 9400 (1880.0 MHz)

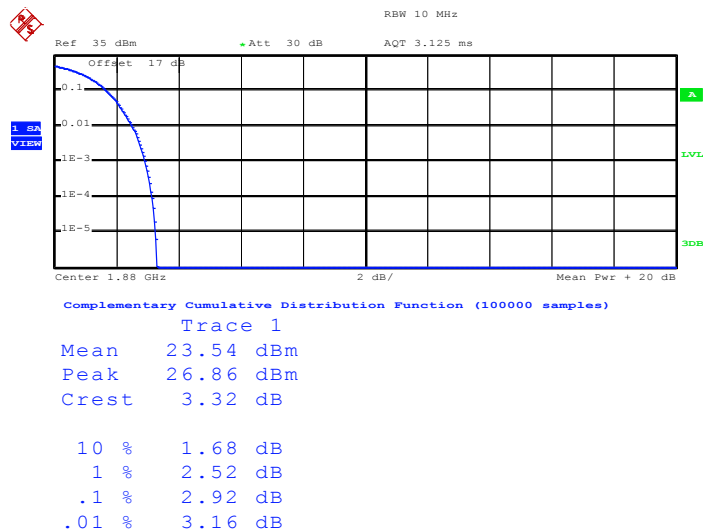

Date: 2.FEB.2013 08:49:30

Peak-to-Average Ratio on Channel 9538 (1907.6 MHz)

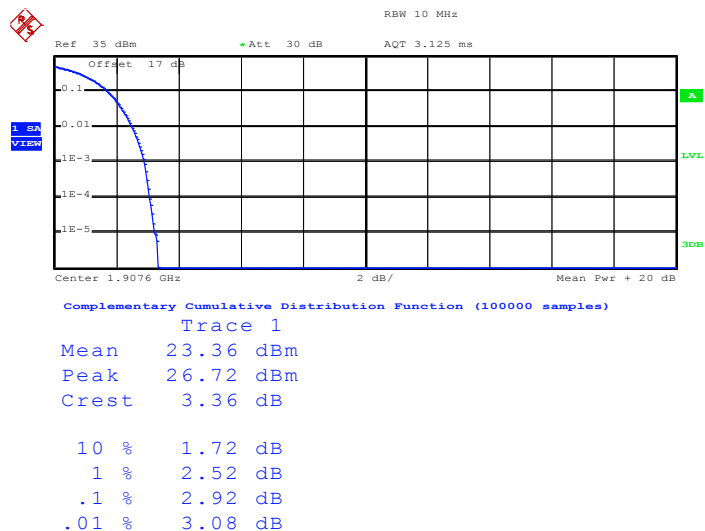


Date: 2.FEB.2013 08:49:56




Band :	CDMA2000 BC1	Test Mode :	1xRTT Link (QPSK)
--------	--------------	-------------	-------------------

Peak-to-Average Ratio on Channel 25 (1851.25 MHz)

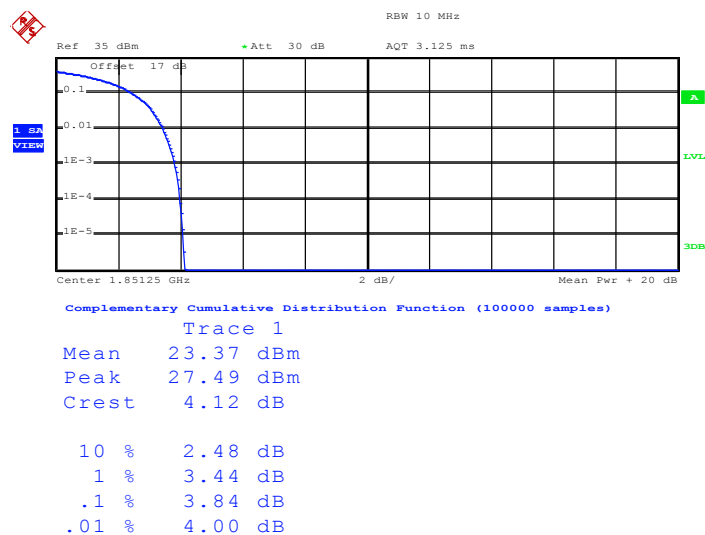


Date: 2.FEB.2013 07:25:26

Peak-to-Average Ratio on Channel 600 (1880 MHz)

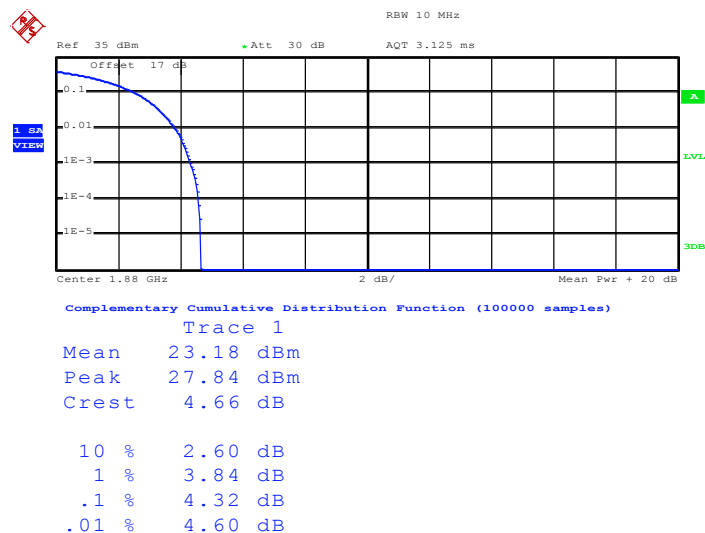

Date: 2.FEB.2013 07:14:43

Peak-to-Average Ratio on Channel 1175 (1908.75 MHz)

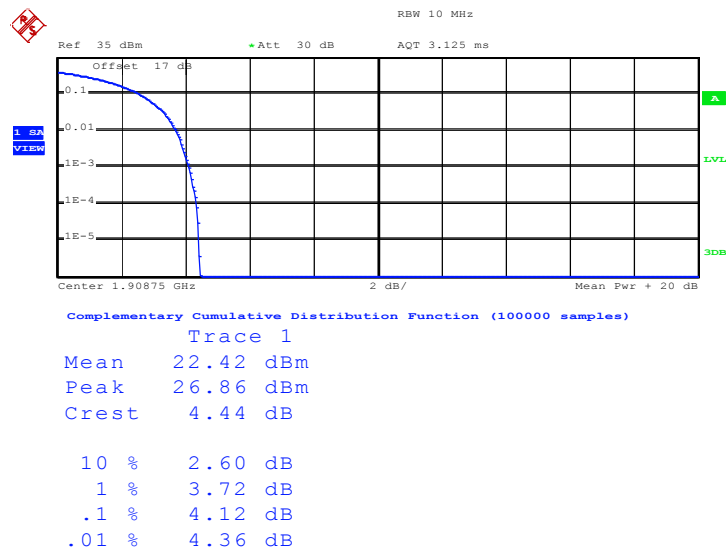

Date: 2.FEB.2013 07:21:27

3.3 Field Strength of Spurious Radiation Measurement

3.3.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.3.2 Measuring Instruments


See list of measuring instruments of this test report.

3.3.3 Test Procedures


1. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

3.3.4 Test Setup


For radiated emissions below 30MHz

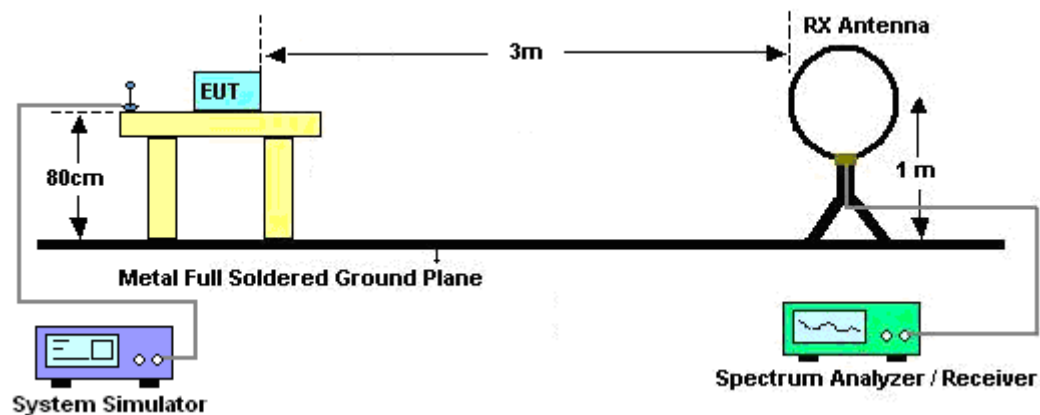

For radiated emissions from 30MHz to 1GHz

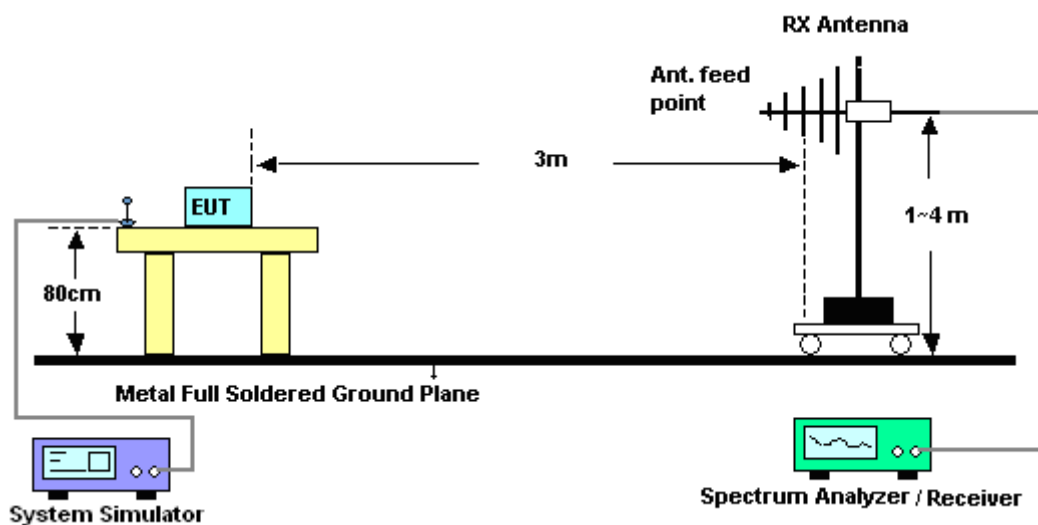

For radiated emissions above 1GHz

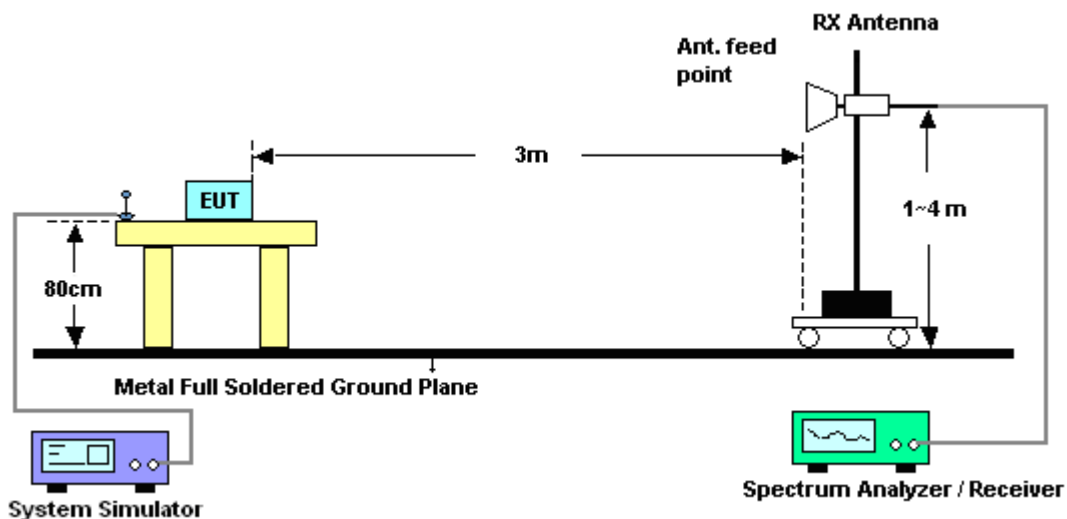


3.3.5 Test Results of Radiated Emissions (9 KHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.


3.3.6 Test Result of Field Strength of Spurious Radiated

Band :	GSM850 (GMSK)	Temperature :	23~25°C
Test Mode :	GPRS Class 8 Link	Relative Humidity :	52~54%
Test Engineer :	David Ke	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

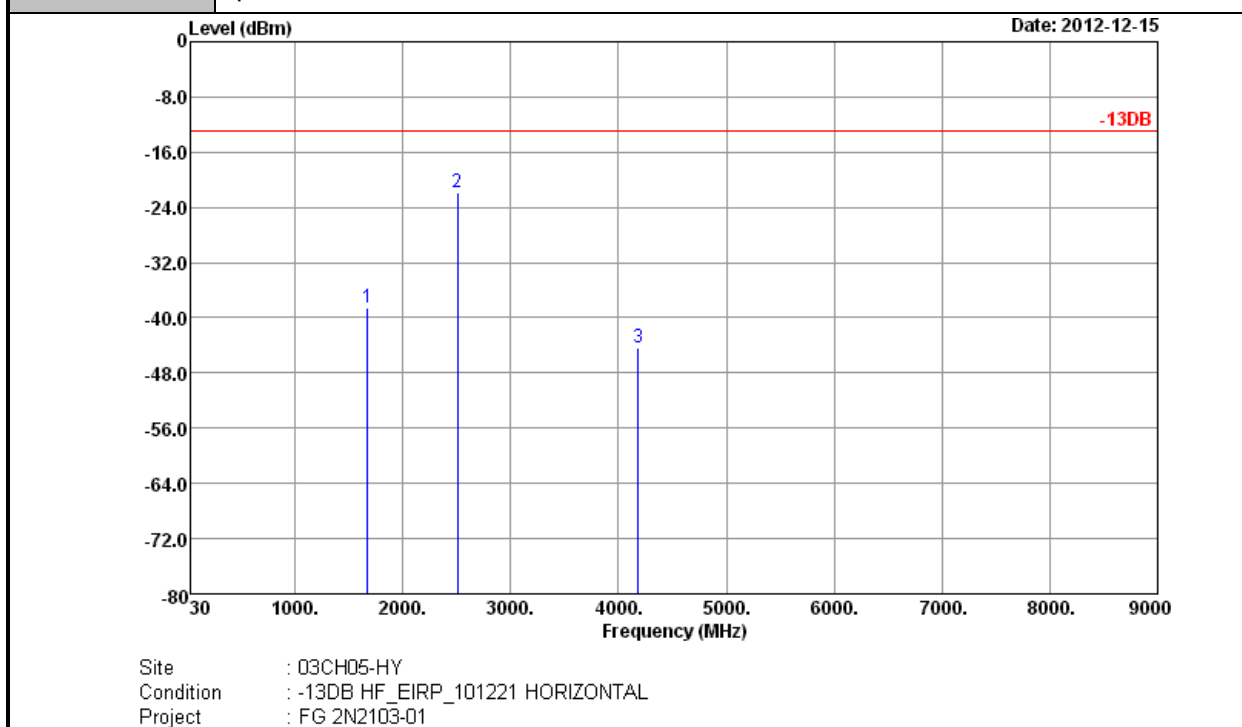

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-38.60	-13	-25.60	-46.19	-40.36	1.35	5.25	H	Pass
2509	-21.79	-13	-8.79	-31.65	-24.17	1.58	6.11	H	Pass
4180	-44.24	-13	-31.24	-60.83	-49.28	1.96	9.15	H	Pass


Band :	GSM850 (GMSK)	Temperature :	23~25°C
Test Mode :	GPRS Class 8 Link	Relative Humidity :	52~54%
Test Engineer :	David Ke	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

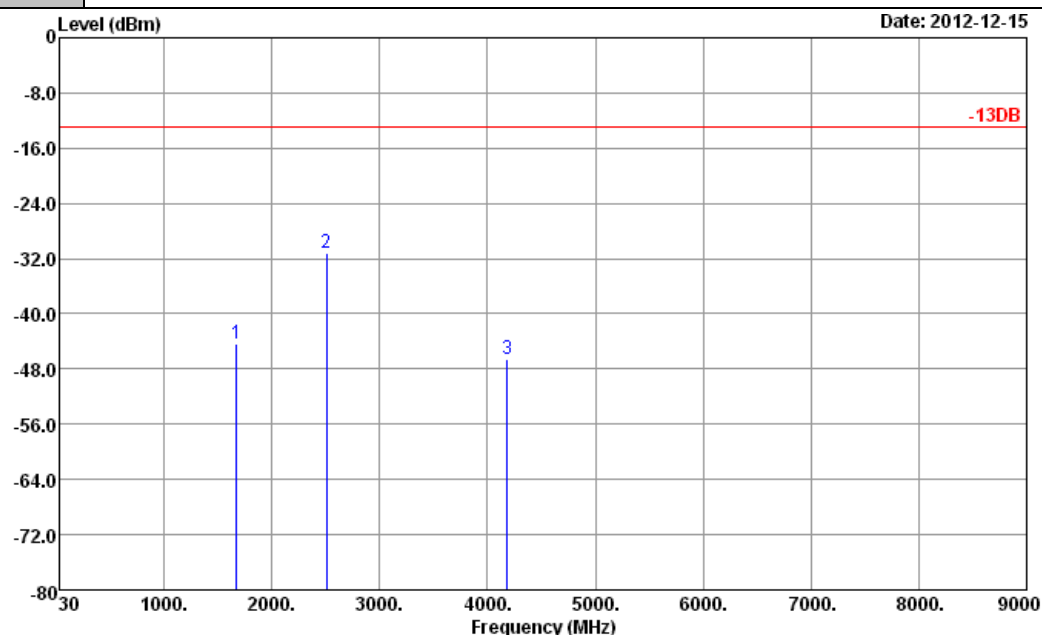

Site : 03CH05-HY
 Condition : -13DB HF_EIRP_101221 VERTICAL
 Project : FG 2N2103-01

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-44.42	-13	-31.42	-51.6	-46.18	1.35	5.25	V	Pass
2509	-31.09	-13	-18.09	-41.54	-33.47	1.58	6.11	V	Pass
4180	-46.59	-13	-33.59	-62.38	-51.63	1.96	9.15	V	Pass

Band :	GSM850 (8PSK)	Temperature :	23~25°C
Test Mode :	EDGE Class 8 Link	Relative Humidity :	52~54%
Test Engineer :	David Ke	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

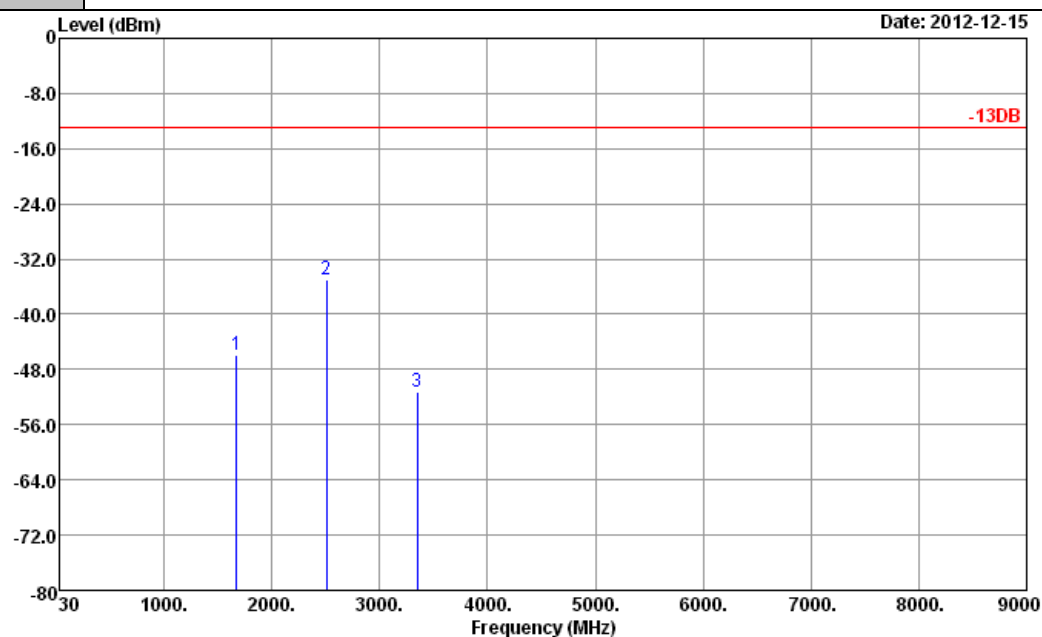


Site : 03CH05-HY
 Condition : -13DB HF_EIRP_101221 HORIZONTAL
 Project : FG 2N2103-01

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-45.92	-13	-32.92	-52.21	-47.68	1.35	5.25	H	Pass
2509	-35.08	-13	-22.08	-45.34	-37.46	1.58	6.11	H	Pass
3346	-51.34	-13	-38.34	-64.42	-55.19	1.94	7.94	H	Pass



Band :	GSM850 (8PSK)	Temperature :	23~25°C
Test Mode :	EDGE Class 8 Link	Relative Humidity :	52~54%
Test Engineer :	David Ke	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

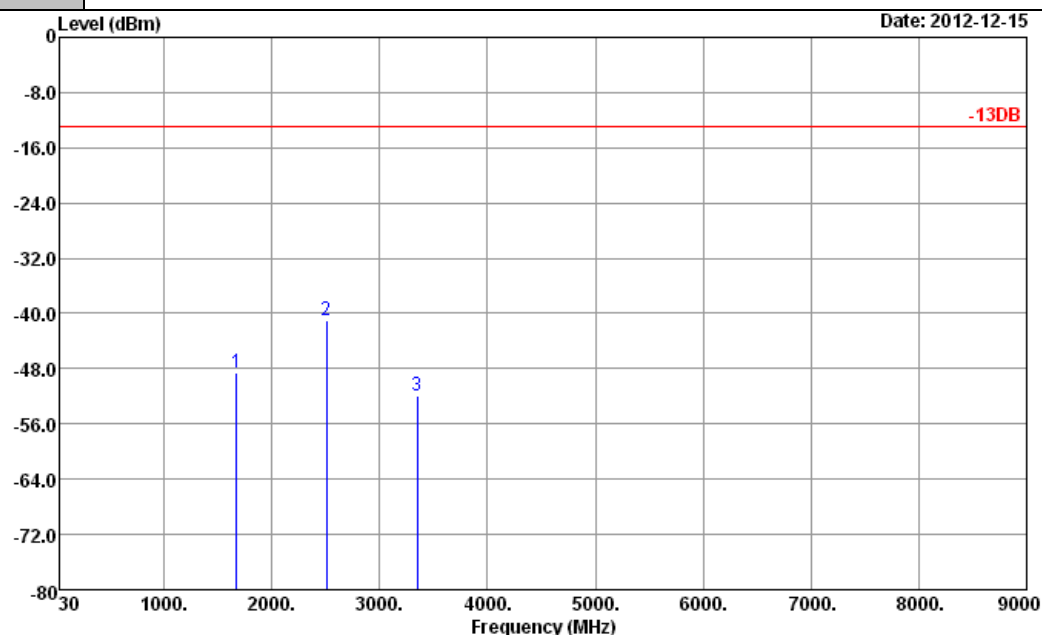


Site : 03CH05-HY
Condition : -13DB HF_EIRP_101221 VERTICAL
Project : FG 2N2103-01

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-48.51	-13	-35.51	-55.45	-50.27	1.35	5.25	V	Pass
2509	-40.96	-13	-27.96	-51.07	-43.34	1.58	6.11	V	Pass
3346	-51.97	-13	-38.97	-64.27	-55.82	1.94	7.94	V	Pass




Band :	GSM1900 (GMSK)	Temperature :	23~25°C
Test Mode :	GPRS Class 8 Link	Relative Humidity :	52~54%
Test Engineer :	David Ke	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

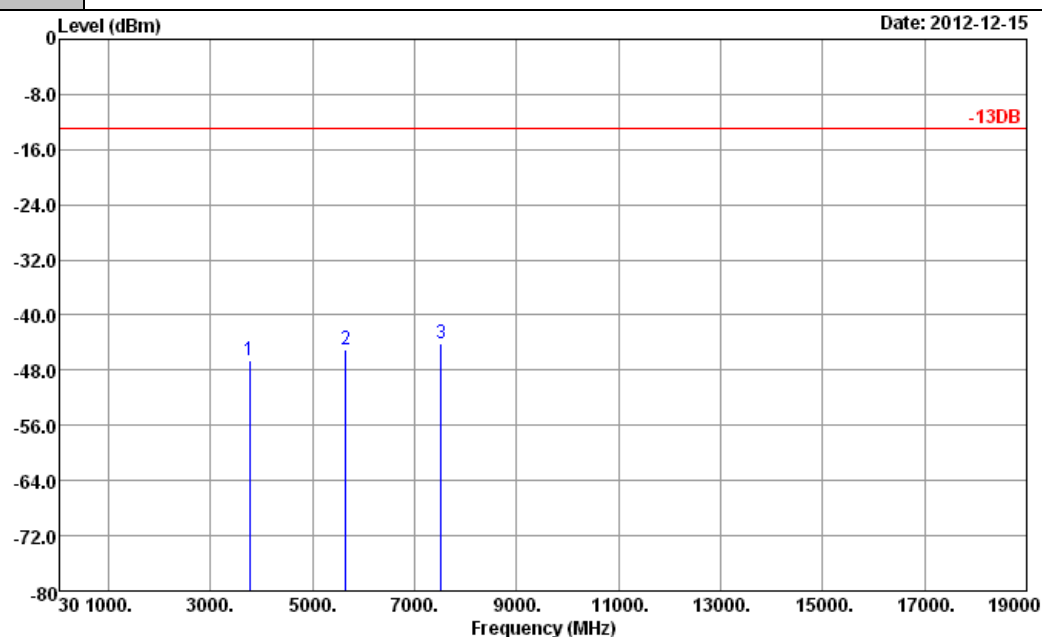

Site : 03CH05-HY
Condition : -13DB HF_EIRP_101221 HORIZONTAL
Project : FG 2N2103-01

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-46.50	-13	-33.50	-60.8	-53.21	2.00	8.71	H	Pass
5644	-45.12	-13	-32.12	-65.01	-53.76	2.13	10.77	H	Pass
7520	-44.11	-13	-31.11	-67.03	-53.65	2.68	12.22	H	Pass


Band :	GSM1900 (GMSK)	Temperature :	23~25°C
Test Mode :	GPRS Class 8 Link	Relative Humidity :	52~54%
Test Engineer :	David Ke	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

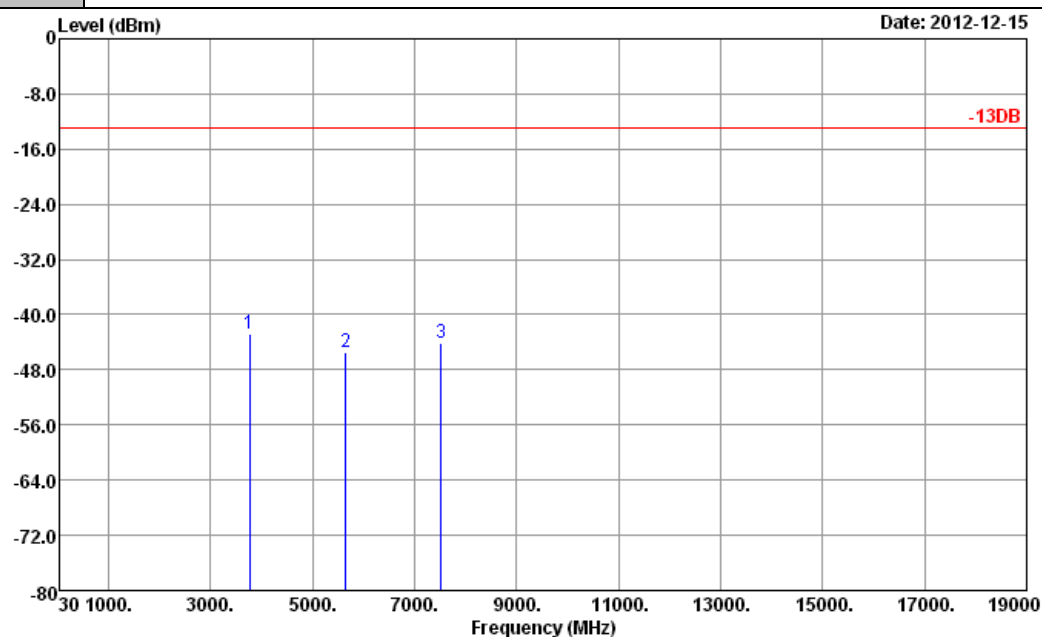

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-42.76	-13	-29.76	-56.87	-49.47	2.00	8.71	V	Pass
5640	-45.51	-13	-32.51	-64.95	-54.15	2.13	10.77	V	Pass
7520	-44.19	-13	-31.19	-67.03	-53.73	2.68	12.22	V	Pass



Band :	GSM1900 (8PSK)	Temperature :	23~25°C
Test Mode :	EDGE Class 8 Link	Relative Humidity :	52~54%
Test Engineer :	David Ke	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

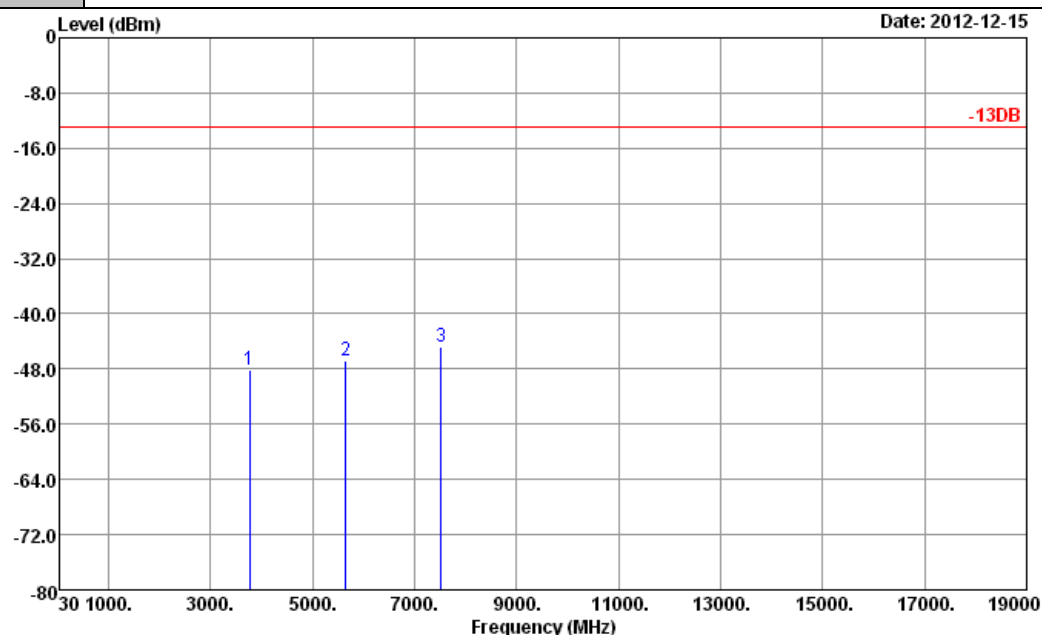


Site : 03CH05-HY
 Condition : -13DB HF_EIRP_101221 HORIZONTAL
 Project : FG 2N2103-01

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-48.06	-13	-35.06	-63.21	-54.77	2.00	8.71	H	Pass
5640	-46.82	-13	-33.82	-66.14	-55.46	2.13	10.77	H	Pass
7520	-44.85	-13	-31.85	-67.64	-54.39	2.68	12.22	H	Pass



Band :	GSM1900 (8PSK)	Temperature :	23~25°C
Test Mode :	EDGE Class 8 Link	Relative Humidity :	52~54%
Test Engineer :	David Ke	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

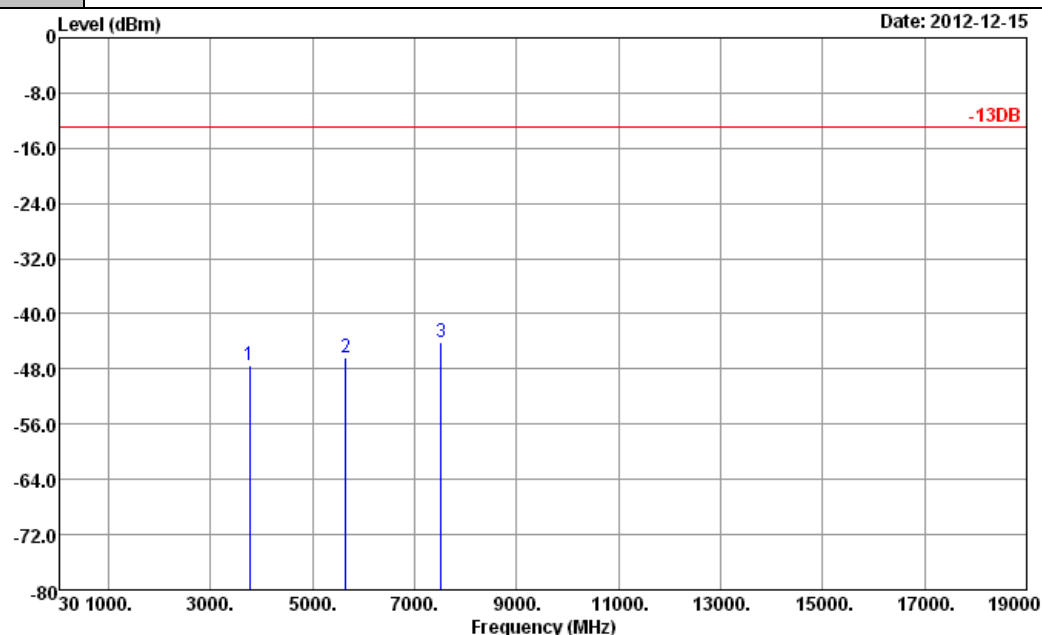


Site : 03CH05-HY
Condition : -13DB HF_EIRP_101221 VERTICAL
Project : FG 2N2103-01

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-47.46	-13	-34.46	-62.3	-54.17	2.00	8.71	V	Pass
5640	-46.25	-13	-33.25	-66.15	-54.89	2.13	10.77	V	Pass
7520	-44.09	-13	-31.09	-67.01	-53.63	2.68	12.22	V	Pass



Band :	WCDMA Band V (QPSK)	Temperature :	23~25°C
Test Mode :	RMC 12.2Kbps Link	Relative Humidity :	52~54%
Test Engineer :	David Ke	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

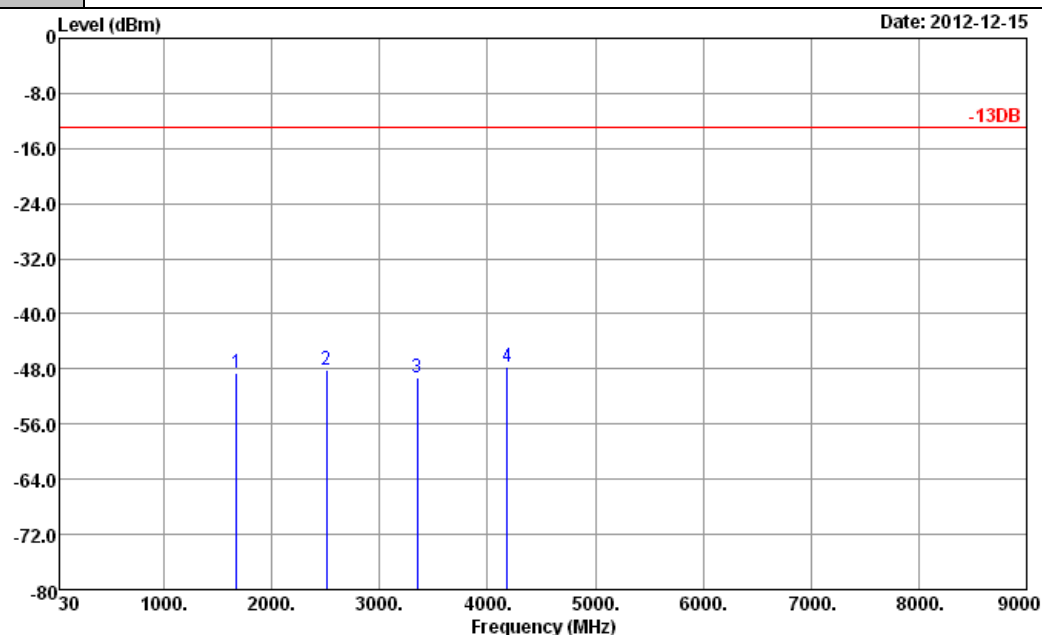


Site : 03CH05-HY
Condition : -13DB HF_EIRP_101221 HORIZONTAL
Project : FG 2N2103-01

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1675	-48.63	-13	-35.63	-55.57	-50.39	1.35	5.25	H	Pass
2506	-48.04	-13	-35.04	-58.58	-50.42	1.58	6.11	H	Pass
3349	-49.34	-13	-36.34	-62.4	-53.19	1.94	7.94	H	Pass
4185	-47.64	-13	-34.64	-63.22	-52.68	1.96	9.15	H	Pass




Band :	WCDMA Band V (QPSK)	Temperature :	23~25°C
Test Mode :	RMC 12.2Kbps Link	Relative Humidity :	52~54%
Test Engineer :	David Ke	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

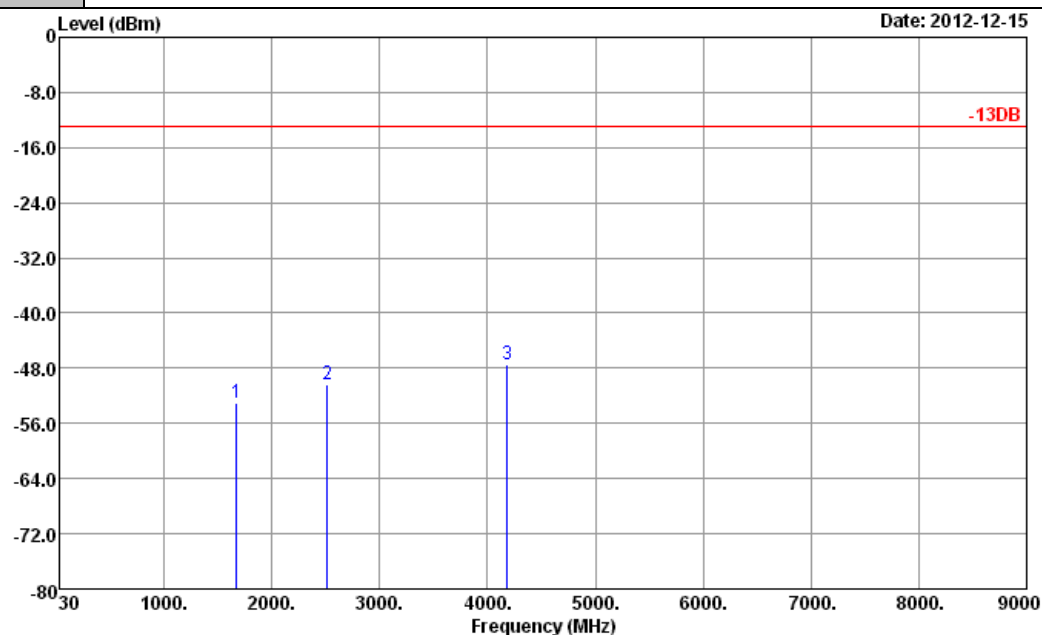

Site : 03CH05-HY
 Condition : -13DB HF_EIRP_101221 VERTICAL
 Project : FG 2N2103-01

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1675	-53.05	-13	-40.05	-59.99	-54.81	1.35	5.25	V	Pass
2512	-50.27	-13	-37.27	-60.25	-52.65	1.58	6.11	V	Pass
4185	-47.43	-13	-34.43	-63.53	-52.47	1.96	9.15	V	Pass

Band :	WCDMA Band IV (QPSK)	Temperature :	23~25°C
Test Mode :	RMC 12.2Kbps Link	Relative Humidity :	52~54%
Test Engineer :	David Ke	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

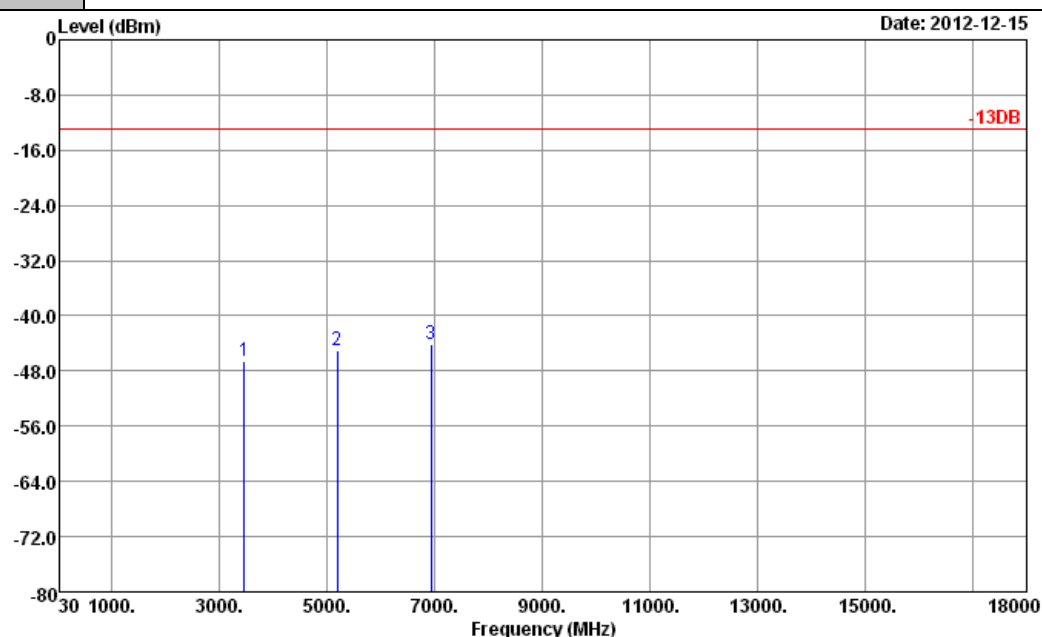


Site : 03CH05-HY
Condition : -13DB HF_EIRP_101221 HORIZONTAL
Project : FG 2N2103-01

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3464	-46.47	-13	-33.47	-58.98	-52.76	2.01	8.30	H	Pass
5200	-45.05	-13	-32.05	-64.41	-53.52	2.09	10.56	H	Pass
6932	-44.15	-13	-31.15	-66.53	-53.27	2.38	11.50	H	Pass



Band :	WCDMA Band IV (QPSK)	Temperature :	23~25°C
Test Mode :	RMC 12.2Kbps Link	Relative Humidity :	52~54%
Test Engineer :	David Ke	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

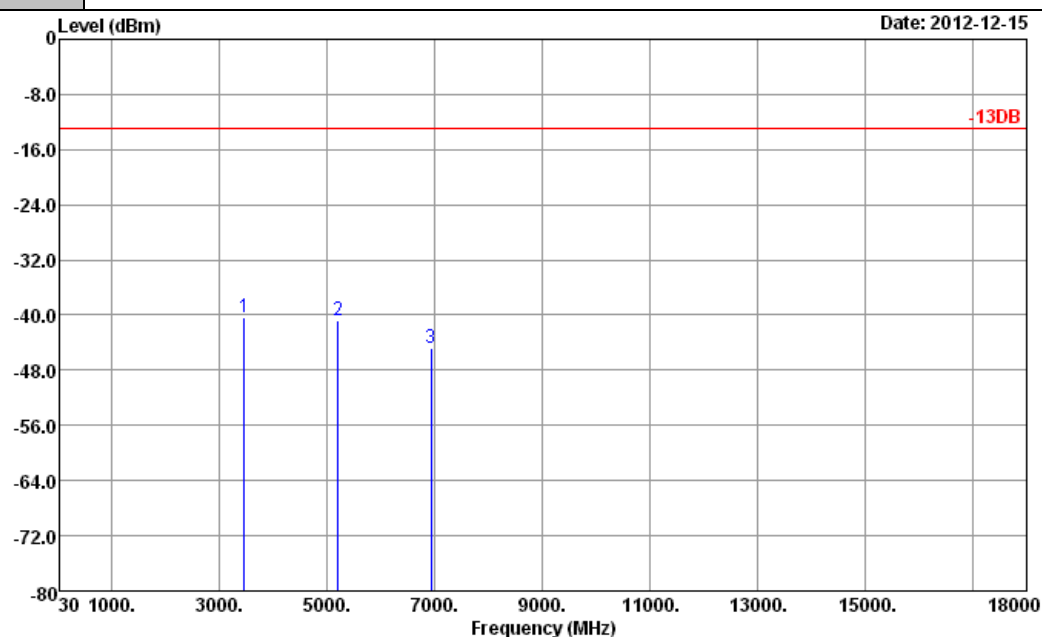


Site : 03CH05-HY
Condition : -13DB HF_EIRP_101221 VERTICAL
Project : FG 2N2103-01

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3464	-40.44	-13	-27.44	-53.75	-46.73	2.01	8.30	V	Pass
5204	-40.68	-13	-27.68	-58.75	-49.15	2.09	10.56	V	Pass
6932	-44.70	-13	-31.70	-66.54	-53.82	2.38	11.50	V	Pass



Band :	WCDMA Band II (QPSK)	Temperature :	23~25°C
Test Mode :	RMC 12.2Kbps Link	Relative Humidity :	52~54%
Test Engineer :	David Ke	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

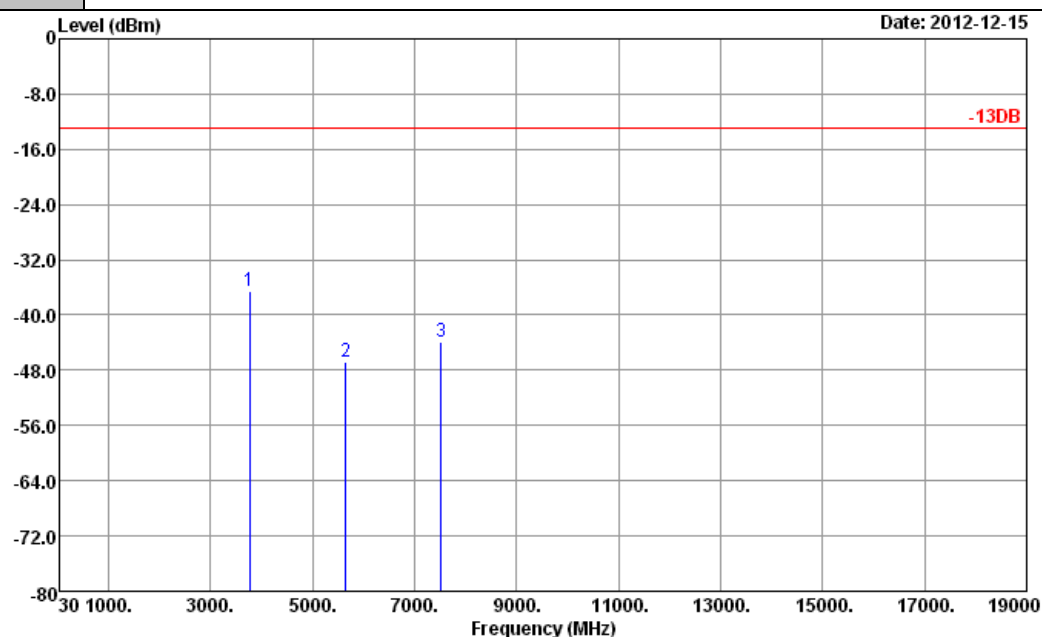


Site : 03CH05-HY
Condition : -13DB HF_EIRP_101221 HORIZONTAL
Project : FG 2N2103-01

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-36.56	-13	-23.56	-50.45	-43.27	2.00	8.71	H	Pass
5640	-46.75	-13	-33.75	-66.12	-55.39	2.13	10.77	H	Pass
7524	-43.88	-13	-30.88	-66.43	-53.42	2.68	12.22	H	Pass



Band :	WCDMA Band II (QPSK)	Temperature :	23~25°C
Test Mode :	RMC 12.2Kbps Link	Relative Humidity :	52~54%
Test Engineer :	David Ke	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

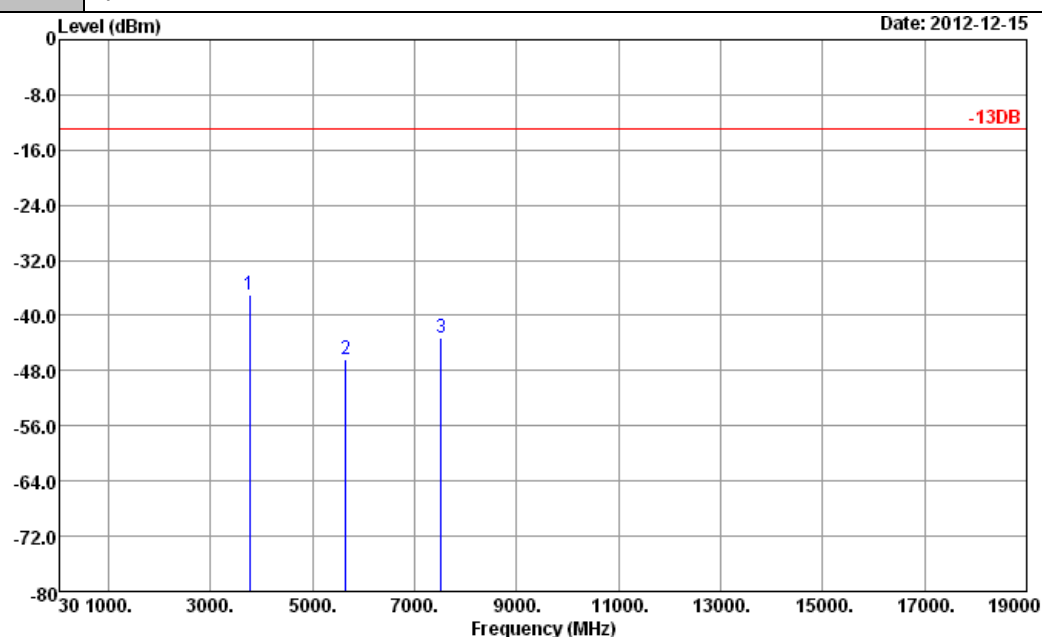


Site : 03CH05-HY
Condition : -13DB HF_EIRP_101221 VERTICAL
Project : FG 2N2103-01

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3756	-37.02	-13	-24.02	-51.99	-43.73	2.00	8.71	V	Pass
5640	-46.31	-13	-33.31	-66.22	-54.95	2.13	10.77	V	Pass
7520	-43.24	-13	-30.24	-66.54	-52.78	2.68	12.22	V	Pass




Band :	CDMA2000 BC0 (QPSK)	Temperature :	23~25°C
Test Mode :	1xRTT_RC1+SO55	Relative Humidity :	52~54%
Test Engineer :	David Ke	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

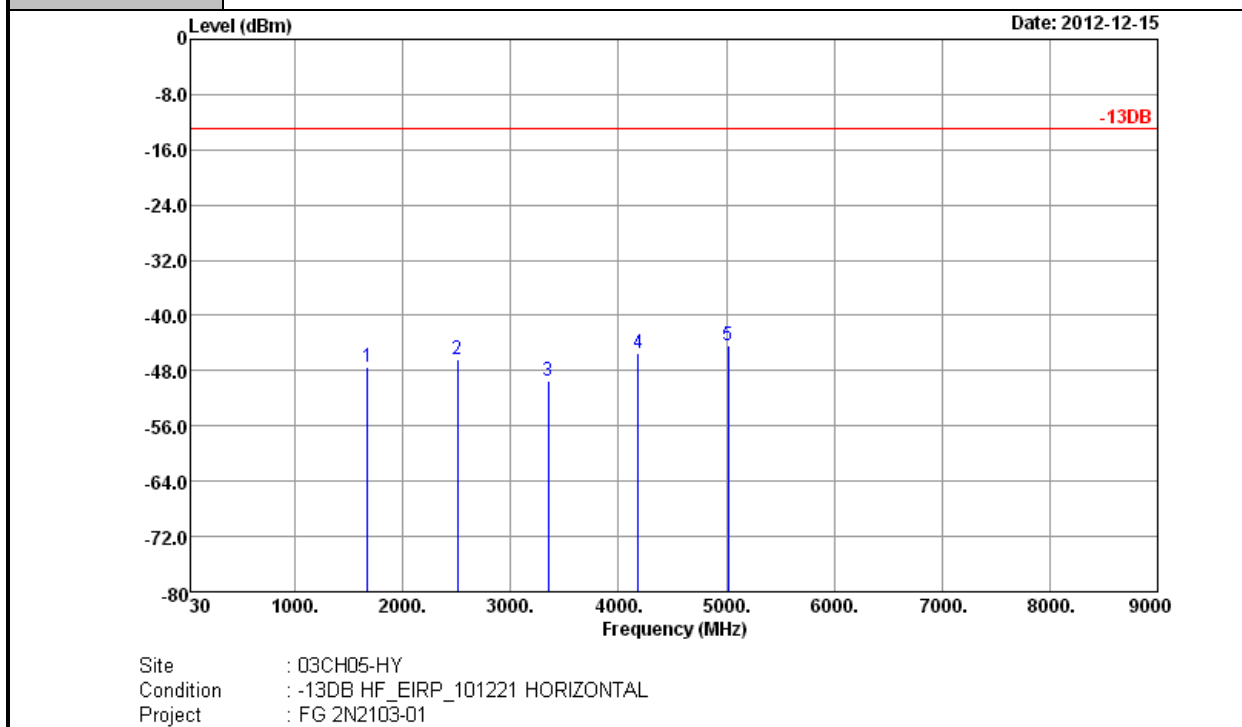

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-47.50	-13	-34.50	-54.61	-49.26	1.35	5.25	H	Pass
2509	-46.33	-13	-33.33	-56.29	-48.71	1.58	6.12	H	Pass
3349	-49.49	-13	-36.49	-61.61	-53.34	1.94	7.94	H	Pass
4180	-45.54	-13	-32.54	-61.64	-50.58	1.96	9.15	H	Pass
5020	-44.44	-13	-31.44	-63.04	-50.62	2.08	10.42	H	Pass

Band :	CDMA2000 BC0 (QPSK)	Temperature :	23~25°C
Test Mode :	1xRTT_RC1+SO55	Relative Humidity :	52~54%
Test Engineer :	David Ke	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

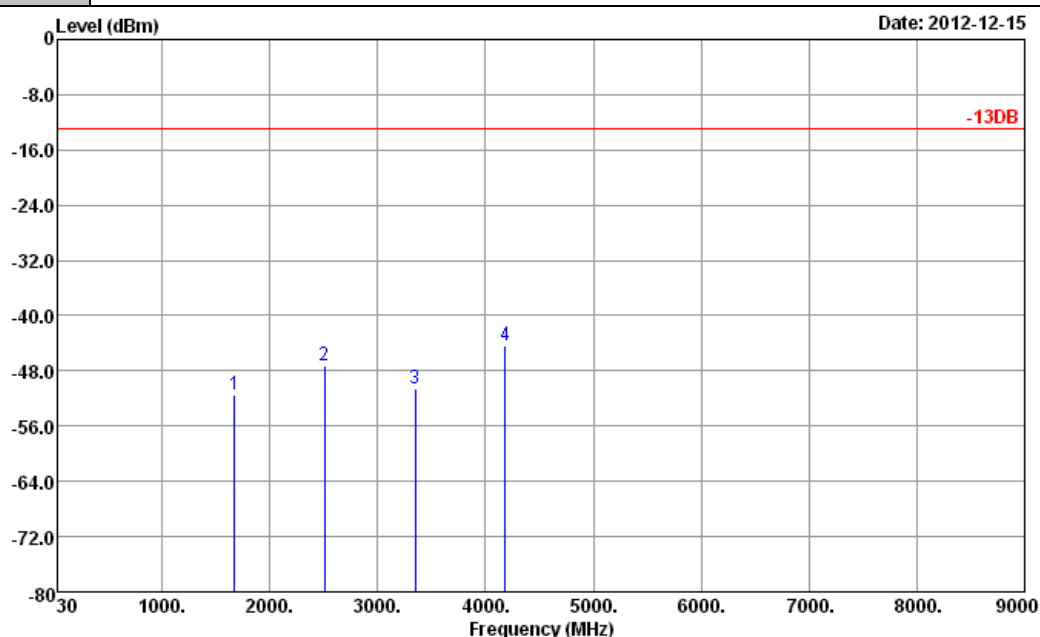


Site : 03CH05-HY
 Condition : -13DB HF_EIRP_101221 VERTICAL
 Project : FG 2N2103-01

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-51.38	-13	-38.38	-58.11	-53.14	1.35	5.25	V	Pass
2509	-47.20	-13	-34.20	-57.84	-49.58	1.58	6.12	V	Pass
3346	-50.64	-13	-37.64	-62.82	-54.49	1.94	7.94	V	Pass
4180	-44.27	-13	-31.27	-60.77	-49.31	1.96	9.15	V	Pass




Band :	CDMA2000 BC1 (QPSK)	Temperature :	23~25°C
Test Mode :	1xRTT_RC1+SO55	Relative Humidity :	52~54%
Test Engineer :	David Ke	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

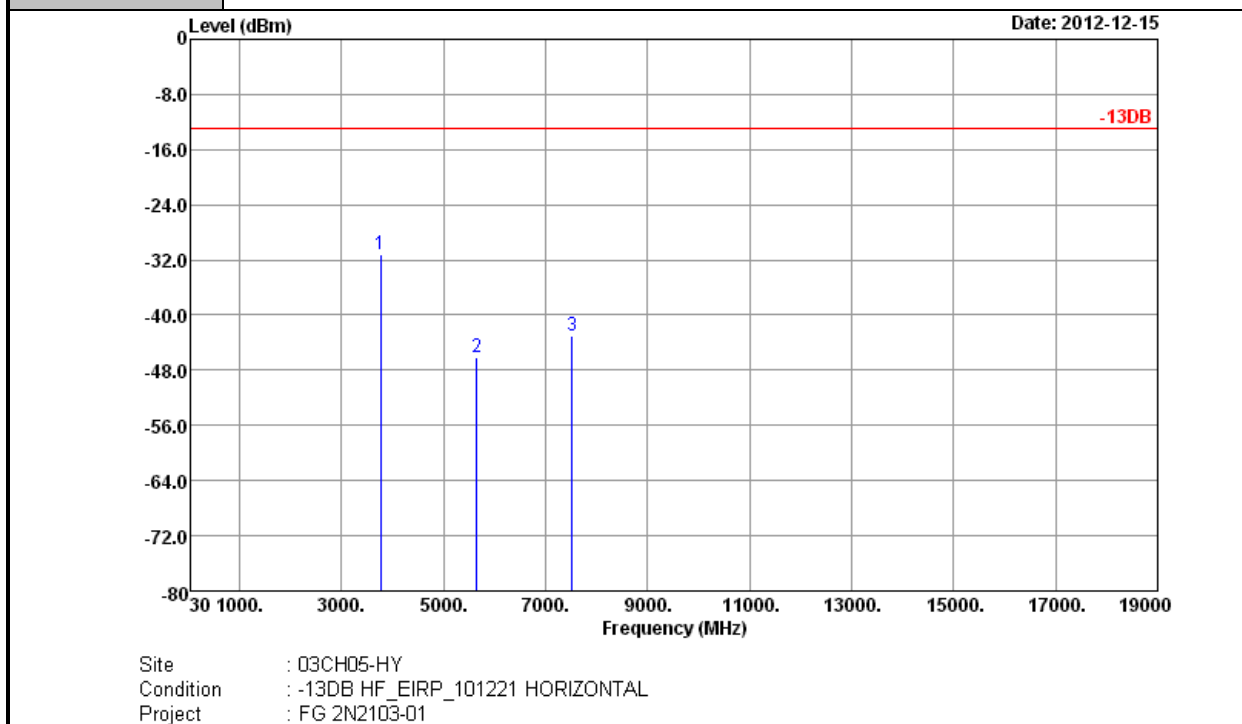

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-31.13	-13	-18.13	-45.95	-37.84	2.00	8.71	H	Pass
5640	-46.12	-13	-33.12	-66.58	-54.76	2.13	10.77	H	Pass
7520	-43.09	-13	-30.09	-66.71	-52.63	2.68	12.22	H	Pass

Band :	CDMA2000 BC1 (QPSK)	Temperature :	23~25°C
Test Mode :	1xRTT_RC1+SO55	Relative Humidity :	52~54%
Test Engineer :	David Ke	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

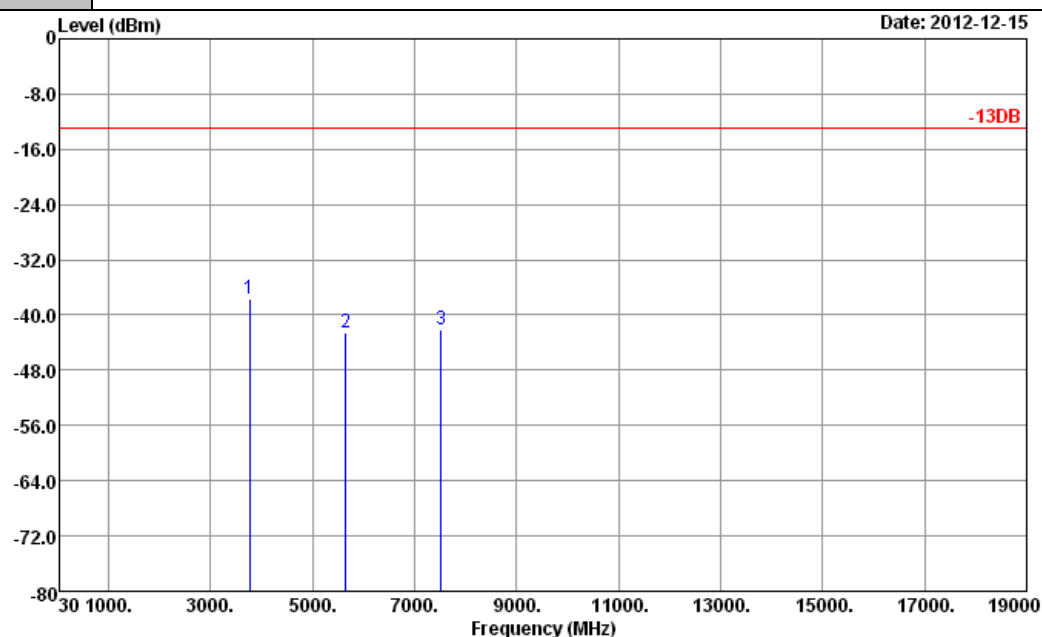

Site : 03CH05-HY
Condition : -13DB HF_EIRP_101221 VERTICAL
Project : FG 2N2103-01

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-37.60	-13	-24.60	-51.96	-44.31	2.00	8.71	V	Pass
5640	-42.64	-13	-29.64	-62.41	-51.28	2.13	10.77	V	Pass
7520	-42.04	-13	-29.04	-65.16	-51.58	2.68	12.22	V	Pass

3.4 Frequency Stability Measurement

3.4.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.4.2 Measuring Instruments

See list of measuring instruments of this test report.


3.4.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.
4. If the EUT cannot be turned on at -30°C , the testing lowest temperature will be raised in 10°C step until the EUT can be turned on.

3.4.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the base station.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

3.4.5 Test Setup

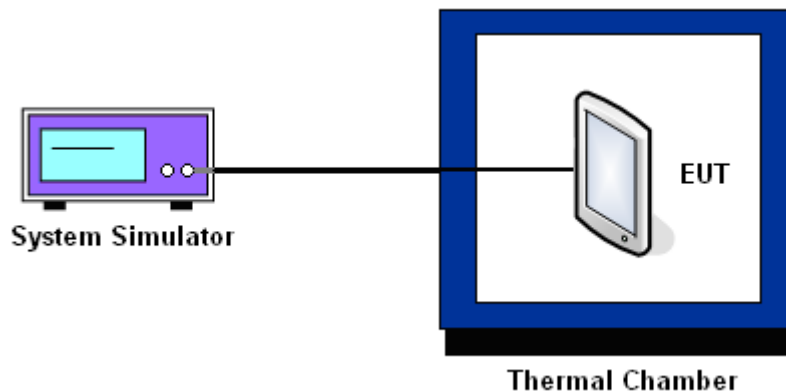

3.4.6 Test Result of Temperature Variation

Band :	WCDMA Band IV	Channel :	1413
Limit (ppm) :	2.5	Frequency :	1732.6 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	44	0.03	PASS
-20	42	0.02	
-10	33	0.02	
0	31	0.02	
10	30	0.02	
20	37	0.02	
30	39	0.02	
40	43	0.03	
50	46	0.03	

Note: The test was performed with module in host.

3.4.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Freq. Dev. (Hz)	Deviation (ppm)	Limit (ppm)	Result
WCDMA Band IV CH1413	RMC 12.2Kbps	120	27	0.02	2.5	Pass
		102	31	0.02		
		138	35	0.02		

Note:

1. Normal Voltage = 120V.
2. The test was performed with module in host.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
System Simulator	R&S	CMU200	117995	N/A	Jul. 30, 2012	Dec. 19, 2012 ~ Feb. 07, 2013	Jul. 29, 2013	Conducted (TH02-HY)
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 06, 2012	Dec. 19, 2012 ~ Feb. 07, 2013	Jun. 05, 2013	Conducted (TH02-HY)
Spectrum Analyzer	R&S	FSV40	100979	9kHz~40GHz	Oct. 08, 2012	Dec. 19, 2012 ~ Feb. 07, 2013	Oct. 07, 2013	Conducted (TH02-HY)
Spectrum Analyzer	R&S	ESU26	100390	20Hz ~ 26.5GHz	Dec. 22, 2011	Dec. 15, 2012	Dec. 21, 2012	Radiation (03CH05-HY)
Bilog Antenna	Schaffner	CBL6111C	2725	30MHz~2GHz	Oct. 06, 2012	Dec. 15, 2012	Oct. 05, 2013	Radiation (03CH05-HY)
Turn Table	HD	Deis HD 2000	420/611	0 ~ 360 degree	N/A	Dec. 15, 2012	N/A	Radiation (03CH05-HY)
Antenna Mast	HD	MA 240	240/666	1 m ~ 4 m	N/A	Dec. 15, 2012	N/A	Radiation (03CH05-HY)
Horn Antenna	ESCO	3117	66584	1GHz~18GHz	Aug. 10, 2012	Dec. 15, 2012	Aug. 09, 2013	Radiation (03CH05-HY)
Pre Amplifier	Agilent	8449B	3008A02665	1GHz~26.5GHz	Aug. 28, 2012	Dec. 15, 2012	Aug. 27, 2013	Radiation (03CH05-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz ~ 40GHz	Sep. 28, 2012	Dec. 15, 2012	Sep. 27, 2013	Radiation (03CH05-HY)
Pre Amplifier	COM-POWER	PA-103	161075	10-1000MHz.32 dB.GAIN	Feb. 27, 2012	Dec. 15, 2012	Feb. 26, 2013	Radiation (03CH05-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9KHz ~ 30MHz	Jul. 03, 2012	Dec. 15, 2012	Jul. 02, 2013	Radiation (03CH05-HY)
System Simulator	R&S	CMU200	117997	N/A	Aug. 22, 2011	Dec. 15, 2012	Aug. 21, 2013	Radiation (03CH05-HY)

5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.54
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.72
---	------



Appendix A. Photographs of EUT

Please refer to Sporton report number EP2N2103-01 as below.