



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Hewlett-Packard Company
Applicant Address	3000 Hanover Street Palo Alto, California 94304 U.S.A.
FCC ID	B94MRLBB1401
Manufacturer's company	Joy Technology (ShenZhen) Corporation
Manufacturer Address	Building A,B,C,D, HengKeng Ind., Shangpai, Shangwu,Aiqun Rd., Shiyan Town,Shenzhen 518135 China

Product Name	HP R110/PS110 Wireless 11n VPN Router
Brand Name	HP
Model No.	MRLBB-1401, MRLBB-1405
Product No.	J9974A(AM), J9975A(WW), JL065A(AM), JL066A(WW)
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	May 14, 2014
Final Test Date	Aug. 05, 2014
Submission Type	Original Equipment

Statement

Test result included in this report is for the IEEE 802.11n and IEEE 802.11b/g of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart C, KDB 558074 D01 v03r02 and KDB 662911 D01 v02r01.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.





Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	6
3.5. Table for Test Modes	7
3.6. Table for Testing Locations.....	9
3.7. Table for Multiple Listing and Class II Change.....	9
3.8. Table for Supporting Units	10
3.9. Table for Parameters of Test Software Setting	10
3.10. EUT Operation during Test	10
3.11. Duty Cycle.....	10
3.12. Test Configurations	11
4. TEST RESULT	12
4.1. AC Power Line Conducted Emissions Measurement.....	12
4.2. Maximum Conducted Output Power Measurement.....	16
4.3. Power Spectral Density Measurement	19
4.4. 6dB Spectrum Bandwidth Measurement	29
4.5. Radiated Emissions Measurement	34
4.6. Emissions Measurement	67
4.7. Antenna Requirements	101
5. LIST OF MEASURING EQUIPMENTS	102
6. MEASUREMENT UNCERTAINTY.....	104
APPENDIX A. TEST PHOTOS	A1 ~ A7
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3




History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR410907-01AA	Rev. 01	Initial issue of report	Aug. 15, 2014

1. CERTIFICATE OF COMPLIANCE

Product Name : HP R110/PS110 Wireless 11n VPN Router
Brand Name : HP
Model No. : MRLBB-1401, MRLBB-1405
Product No. : J9974A(AM), J9975A(WW), JLO65A(AM), JLO66A(WW)
Applicant : Hewlett-Packard Company
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on May 14, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

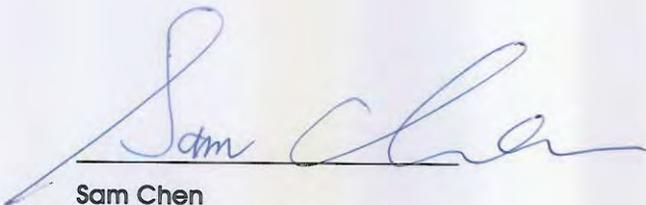

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	16.75 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	4.68 dB
4.3	15.247(e)	Power Spectral Density	Complies	4.94 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	0.07 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.10 dB
4.7	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	see the below table for IEEE 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	MCS0 (HT20): 18.40 MHz ; MCS0 (HT40): 36.32 MHz
Maximum Conducted Output Power	MCS0 (HT20): 24.88 dBm ; MCS0 (HT40): 20.91 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

IEEE 802.11b/g

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11
Channel Band Width (99%)	11b: 8.40 MHz ; 11g: 18.48 MHz
Maximum Conducted Output Power	11b: 19.63 dBm ; 11g: 25.32 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Beamforming Function	<input type="checkbox"/> With beamforming	<input checked="" type="checkbox"/> Without beamforming

Antenna and Band width

Antenna	Three (TX)	
Band width Mode	20 MHz	40 MHz
IEEE 802.11b	V	X
IEEE 802.11g	V	X
IEEE 802.11n	V	V

IEEE 11n Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	3	MCS 0-23
802.11n (HT40)	3	MCS 0-23

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).
The EUT supports HT20 and HT40.

Note 2: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n

3.2. Accessories

Power	Brand	Model	Rating
Adapter 1	APD	WA-24Q12FU	Input: 100-240V~50-60Hz, 0.6A Max. Output: 12V, 2A
Adapter 2	LITE-ON	PA-1031-71	Input: 100-240V~50-60Hz, 1.0A Output: 12V, 2.5A


3.3. Table for Filed Antenna

EUT	Ant.	Brand	Part No.	Antenna Type	Connector	Gain (dBi)		Directional Gain in Correlation	
						2.4GHz	5GHz	2.4GHz	5GHz
1	1	M.gear	120300000091A	Dual-band Omni Patch Antenna	I-PEX	4.4	5.8	9.27	10.60
	2	M.gear	120300000091A	Dual-band Omni Patch Antenna	I-PEX	4.7	6.8		
	3	M.gear	120300000091A	Dual-band Omni Patch Antenna	I-PEX	4.4	4.6		
2	4	M.gear	120300000106A	Dual-band Omni Patch Antenna	I-PEX	4.36	6.30	9.21	10.37
	5	M.gear	120300000106A	Dual-band Omni Patch Antenna	I-PEX	4.34	5.71		
	6	M.gear	120300000106A	Dual-band Omni Patch Antenna	I-PEX	4.61	4.62		

Note: Ant. 1~Ant. 3 are for EUT 1; Ant. 4~Ant. 6 are for EUT 2.

Chain 1: Connect to Ant. 1 or Ant. 4; Chain 2: Connect to Ant. 2 or Ant. 5; Chain 3: Connect to Ant. 3 or Ant. 6.

Chain 1, Chain 2 and Chain 3 could transmit/receive simultaneously.

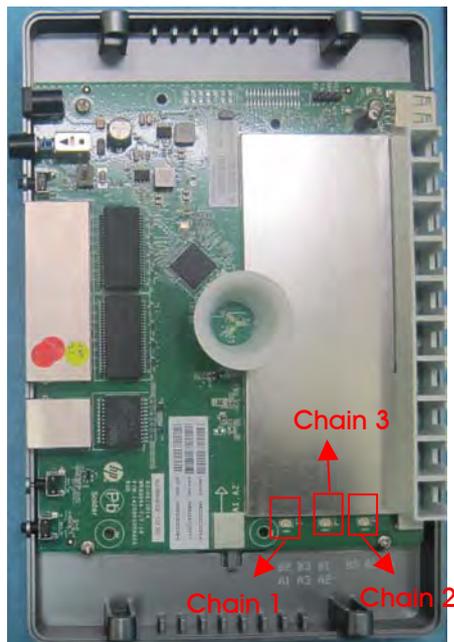

3.4. Table for Carrier Frequencies

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	CTX	-	-	-
Maximum Conducted Output Power	802.11n HT20	MCS0	1/6/11	1+2+3
	802.11n HT40	MCS0	3/6/9	1+2+3
	11b/BPSK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
Power Spectral Density	802.11n HT20	MCS0	1/6/11	1+2+3
	802.11n HT40	MCS0	3/6/9	1+2+3
	11b/BPSK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
6dB Spectrum Bandwidth	802.11n HT20	MCS0	1/6/11	1+2+3
	802.11n HT40	MCS0	3/6/9	1+2+3
	11b/BPSK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
Radiated Emissions 9kHz~1GHz	CTX	-	-	-
Radiated Emissions 1GHz~10 th Harmonic	802.11n HT20	MCS0	1/6/11	1+2+3
	802.11n HT40	MCS0	3/6/9	1+2+3
	11b/BPSK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
Band Edge Emissions	802.11n HT20	MCS0	1/6/11	1+2+3
	802.11n HT40	MCS0	3/6/9	1+2+3
	11b/BPSK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3

The following test modes were performed for all tests:

For Conducted Emission test:

Radiated Emissions above 1GHz test was performed at its 3-axis (X-axis, Y-axis and Z-axis). X-axis was the worst case, so Conducted Emission test will follow this same configuration.

Mode 1. CTX- Place EUT 1 in X-axis + Adapter 1

Mode 2. CTX- Place EUT 1 in X-axis + Adapter 2

Mode 1 is the worst case, so it was selected to record in this test report.

Note: The difference between EUT 1 and EUT 2 is antenna location, and different antenna location doesn't affect Conducted Emission test. Thus, only EUT 1 was tested and recorded in this test report.

For Radiated Emission test below 1GHz:

For EUT 1:

Radiated Emissions above 1GHz test for EUT 1 was performed at its 3-axis (X-axis, Y-axis and Z-axis). X-axis was the worst case, so Emissions below 1GHz test will follow this same configuration.

Mode 1. CTX- Place EUT 1 in X-axis + WLAN 2.4GHz + Adapter 1

Mode 2. CTX- Place EUT 1 in X-axis + WLAN 2.4GHz + Adapter 2

Mode 1 generated the worst case between Mode 1 and Mode 2. Thus, Mode 3 will follow this same configuration.

Mode 3. CTX- Place EUT 1 in X-axis + WLAN 5GHz + Adapter 1

Mode 3 is the worst case, so it was selected to record in this test report.

For EUT 2:

EUT 1 + WLAN 5GHz + Adapter 1 generated the worst case, so measurements for EUT 2 will follow this configuration.

Radiated Emissions above 1GHz test for EUT 2 was performed at its 3-axis (X-axis, Y-axis and Z-axis). Y-axis was the worst case, so Emissions below 1GHz test will follow this same configuration.

Mode 4. CTX- Place EUT 2 in Y-axis + WLAN 5GHz + Adapter 1

For Radiated Emission test above 1GHz:

For EUT 1:

Radiated Emissions above 1GHz test for EUT 1 was performed at its 3-axis (X-axis, Y-axis and Z-axis). X-axis was the worst case, so it's recorded in this report.

Mode 1. CTX- Place EUT 1 in X-axis

For EUT 2:

Radiated Emissions above 1GHz test for EUT 2 was performed at its 3-axis (X-axis, Y-axis and Z-axis). Y-axis was the worst case, so it's recorded in this report.

Mode 2. CTX- Place EUT 2 in Y-axis

3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Multiple Listing

EUT	Model No.	Product No.	Antenna Part No.	LED Board (Model No. NI2188006 003E)	Marketing	Description
EUT 1	MRLBB-1401	J9974A(AM)	120300000091A	Without	U.S.A.	The color, shape and antenna location between these two models are different.
		J9975A(WW)			Worldwide	
EUT 2	MRLBB-1405	JL065A(AM)	120300000106A	With	U.S.A.	
		JL066A(WW)			Worldwide	

Note:

1. EUT 1's directional gain is higher than that of EUT 2, so for Maximum Conducted Output Power, Power Spectral Density and 6dB Spectrum Bandwidth tests, only EUT 1 was tested and recorded in this report.
2. For Radiated Emissions and Band Edge and Fundamental Emissions tests, both EUT 1 and EUT 2 were tested and recorded in this report. (EUT 2 was based on EUT 1's output power to test these items.)

3.8. Table for Supporting Units

For Test Site No: 03CH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	M1330	DoC

For Test Site No: CO01-CB & TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC

3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of IEEE 802.11n

Test Software Version	ART2-GUI Version 2.3		
Frequency	2412 MHz	2437 MHz	2462 MHz
MCS0 HT20	12.5	20.5	14
Frequency	2422 MHz	2437 MHz	2452 MHz
MCS0 HT40	10.5	15.5	15

Power Parameters of IEEE 802.11b/g

Test Software Version	ART2-GUI Version 2.3		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	15.5	15	14
IEEE 802.11g	14	21	15.5


3.10. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.11. Duty Cycle

Mode	On Time(ms)	On+Off Time(ms)	Duty Cycle(%)	1/T Minimum VBW (kHz)
802.11n MCS0 HT20	1.000	1.000	100.00%	0.01
802.11n MCS0 HT40	2.030	2.070	98.07%	0.01
802.11b	1.890	1.930	97.93%	0.53
802.11g	0.935	0.970	96.39%	1.07

3.12. Test Configurations

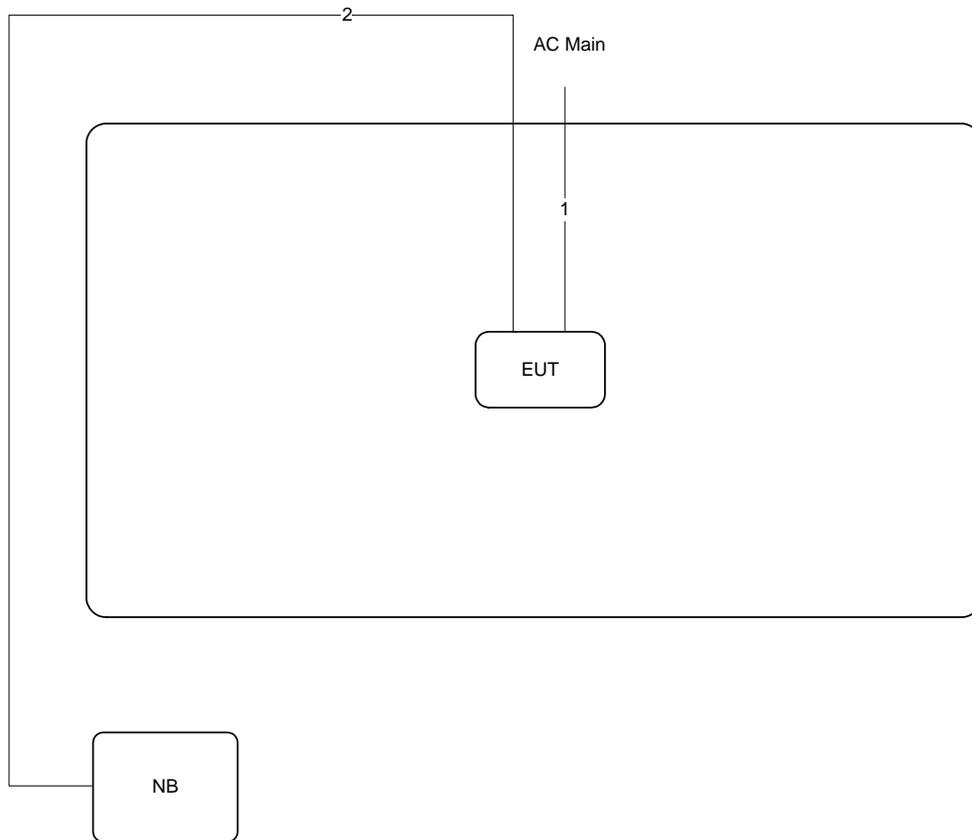

Item	Connection	Shield	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	22°C	Humidity	54%
Test Engineer	Ryo Fan	Phase	Line
Configuration	CTX	Test Mode	Mode 1

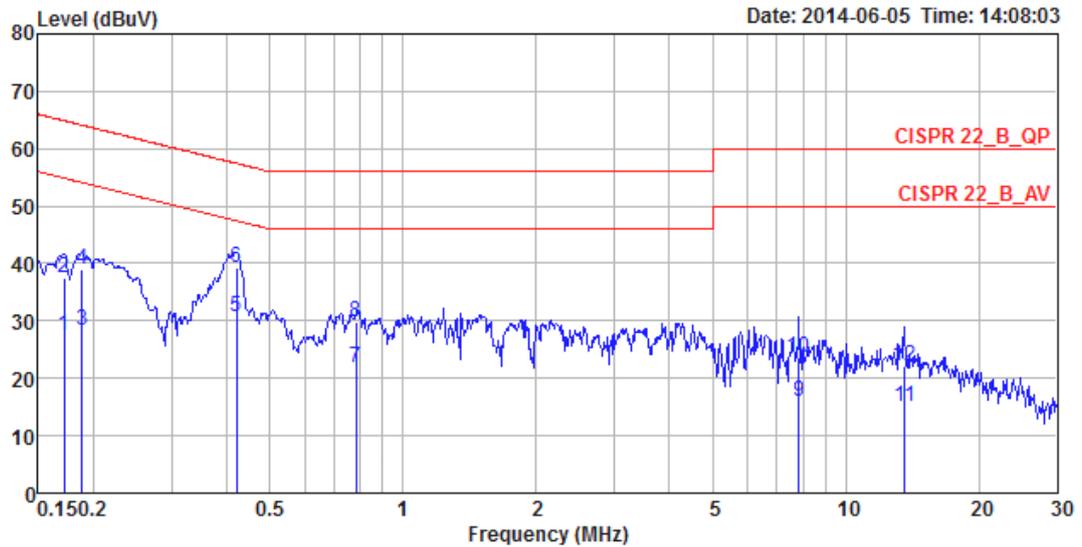

	Freq	Level	Over Limit	Limit Line	LISN Factor	Read Level	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dB	dBuV	dB		
1	0.1712	27.39	-27.51	54.90	0.22	26.98	0.19	LINE	Average
2	0.1712	37.35	-27.55	64.90	0.22	36.94	0.19	LINE	QP
3	0.1884	28.29	-25.82	54.11	0.21	27.88	0.20	LINE	Average
4	0.1884	39.07	-25.04	64.11	0.21	38.66	0.20	LINE	QP
5 a	0.4215	30.57	-16.85	47.42	0.22	30.15	0.20	LINE	Average
6 q	0.4215	39.22	-18.20	57.42	0.22	38.80	0.20	LINE	QP
7	0.7835	21.87	-24.13	46.00	0.23	21.44	0.20	LINE	Average
8	0.7835	29.87	-26.13	56.00	0.23	29.44	0.20	LINE	QP
9	7.8516	15.97	-34.03	50.00	0.39	15.24	0.34	LINE	Average
10	7.8516	23.62	-36.38	60.00	0.39	22.89	0.34	LINE	QP
11	13.6228	14.93	-35.07	50.00	0.56	13.97	0.40	LINE	Average
12	13.6228	22.06	-37.94	60.00	0.56	21.10	0.40	LINE	QP

Temperature	22°C	Humidity	54%
Test Engineer	Ryo Fan	Phase	Neutral
Configuration	CTX	Test Mode	Mode 1

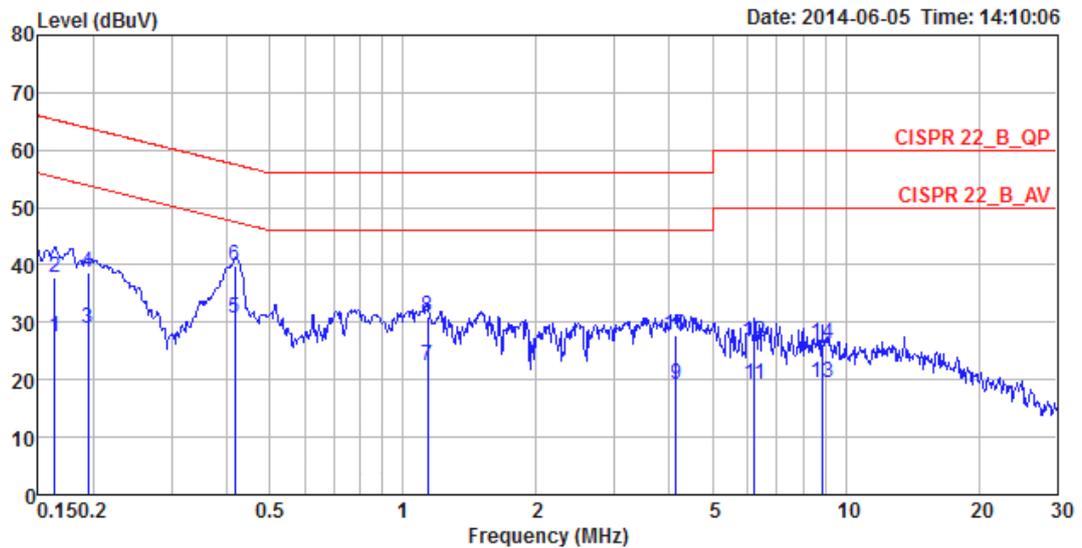

	Freq	Level	Over Limit	Limit Line	LISN Factor	Read Level	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dB	dBuV	dB		
1	0.1633	27.37	-27.93	55.30	0.08	27.10	0.19	NEUTRAL	Average
2	0.1633	37.80	-27.50	65.30	0.08	37.53	0.19	NEUTRAL	QP
3	0.1945	28.87	-24.97	53.84	0.07	28.60	0.20	NEUTRAL	Average
4	0.1945	38.80	-25.04	63.84	0.07	38.53	0.20	NEUTRAL	QP
5 a	0.4171	30.76	-16.75	47.51	0.08	30.48	0.20	NEUTRAL	Average
6 q	0.4171	39.78	-17.73	57.51	0.08	39.50	0.20	NEUTRAL	QP
7	1.1352	22.50	-23.50	46.00	0.10	22.19	0.21	NEUTRAL	Average
8	1.1352	30.94	-25.06	56.00	0.10	30.63	0.21	NEUTRAL	QP
9	4.1356	19.05	-26.95	46.00	0.16	18.59	0.30	NEUTRAL	Average
10	4.1356	27.87	-28.13	56.00	0.16	27.41	0.30	NEUTRAL	QP
11	6.2189	19.34	-30.66	50.00	0.22	18.80	0.32	NEUTRAL	Average
12	6.2189	26.46	-33.54	60.00	0.22	25.92	0.32	NEUTRAL	QP
13	8.8223	19.38	-30.62	50.00	0.27	18.77	0.34	NEUTRAL	Average
14	8.8223	26.28	-33.72	60.00	0.27	25.67	0.34	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

4.2.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03r02 section 9.2.3.2 Measurement using a power meter (PM).
2. Multiple antenna systems was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

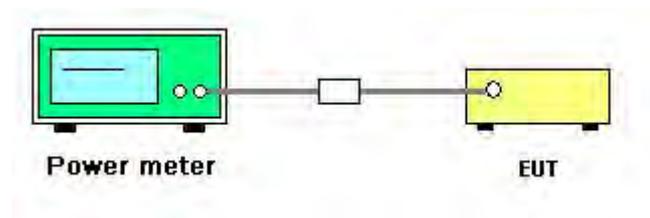

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	20°C	Humidity	60%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n
Test Date	Jul. 10, 2014		

Configuration IEEE 802.11n MCS0 HT20

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
1	2412 MHz	12.46	13.21	13.46	17.83	30.00	Complies
6	2437 MHz	19.72	20.12	20.46	24.88	30.00	Complies
11	2462 MHz	14.43	14.25	14.13	19.04	30.00	Complies

Configuration IEEE 802.11n MCS0 HT40

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
3	2422 MHz	10.46	11.52	11.74	16.05	30.00	Complies
6	2437 MHz	15.59	16.32	16.47	20.91	30.00	Complies
9	2452 MHz	15.11	15.48	15.87	20.27	30.00	Complies

Temperature	20°C	Humidity	60%
Test Engineer	Benson Peng	Configurations	IEEE 802.11b/g
Test Date	Jul. 10, 2014		

Configuration IEEE 802.11b

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
1	2412 MHz	13.97	14.83	15.62	19.63	30.00	Complies
6	2437 MHz	13.93	14.98	14.83	19.38	30.00	Complies
11	2462 MHz	13.36	13.17	13.97	18.28	30.00	Complies

Configuration IEEE 802.11g

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
1	2412 MHz	14.08	14.51	15.04	19.33	30.00	Complies
6	2437 MHz	20.05	20.46	21.07	25.32	30.00	Complies
11	2462 MHz	15.78	15.57	15.63	20.43	30.00	Complies

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3. Test Procedures

1. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be $\leq 8 \text{ dBm}$.

4.3.4. Test Setup Layout

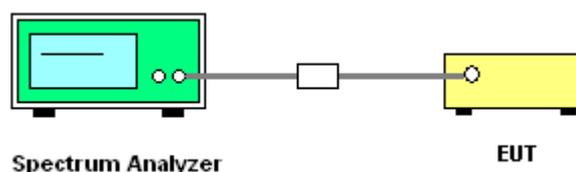

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	20°C	Humidity	60%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n

Configuration IEEE 802.11n MCS0 HT20

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
1	2412 MHz	-13.52	-13.03	-12.7	-8.30	4.73	Complies
6	2437 MHz	-5.97	-5.75	-5.38	-0.92	4.73	Complies
11	2462 MHz	-12.8	-12.05	-11.85	-7.44	4.73	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{l=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{CH}} S_{L,k} \right\}^2}{N_{ANT}} \right] = 9.27 \text{ dBi} > 6 \text{ dBi}$, So Limit = $8 - (9.27 - 6) = 4.73 \text{ dBm/3kHz}$

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{l=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{CH}} S_{L,k} \right\}^2}{N_{ANT}} \right]$$

Configuration IEEE 802.11n MCS0 HT40

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
3	2422 MHz	-17.83	-17.29	-16.81	-12.52	4.73	Complies
6	2437 MHz	-12.74	-12.49	-11.97	-7.62	4.73	Complies
9	2452 MHz	-13.45	-13.21	-12.96	-8.43	4.73	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{l=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{CH}} S_{L,k} \right\}^2}{N_{ANT}} \right] = 9.27 \text{ dBi} > 6 \text{ dBi}$, So Limit = $8 - (9.27 - 6) = 4.73 \text{ dBm/3kHz}$

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{l=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{CH}} S_{L,k} \right\}^2}{N_{ANT}} \right]$$

Temperature	20°C	Humidity	60%
Test Engineer	Benson Peng	Configurations	IEEE 802.11b/g

Configuration IEEE 802.11b

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
1	2412 MHz	-6.23	-5.89	-5.27	-1.01	4.73	Complies
6	2437 MHz	-7.43	-7.05	-6.35	-2.15	4.73	Complies
11	2462 MHz	-8.52	-8.7	-8.05	-3.64	4.73	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{i=1}^{N_{CH}} S_{i,j} \right\}^2}{N_{ANT}} \right] = 9.27 \text{dBi} > 6 \text{dBi}$, So Limit = $8 - (9.27 - 6) = 4.73 \text{dBm/3kHz}$

Configuration IEEE 802.11g


Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
1	2412 MHz	-10.5	-10.13	-9.1	-5.10	4.73	Complies
6	2437 MHz	-5.1	-5.04	-4.81	-0.21	4.73	Complies
11	2462 MHz	-10.07	-10.63	-10.3	-5.56	4.73	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{i=1}^{N_{CH}} S_{i,j} \right\}^2}{N_{ANT}} \right] = 9.27 \text{dBi} > 6 \text{dBi}$, So Limit = $8 - (9.27 - 6) = 4.73 \text{dBm/3kHz}$

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1

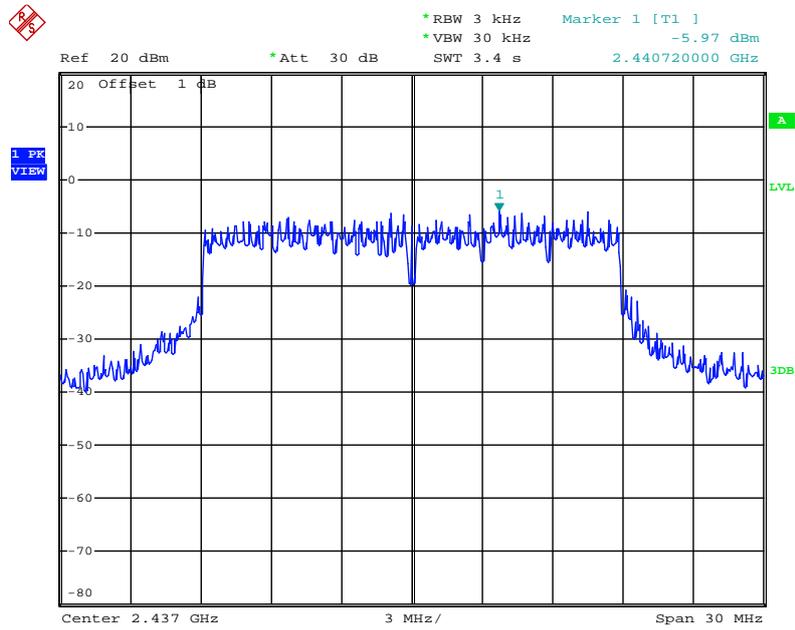


Date: 10.JUL.2014 15:42:33

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 2

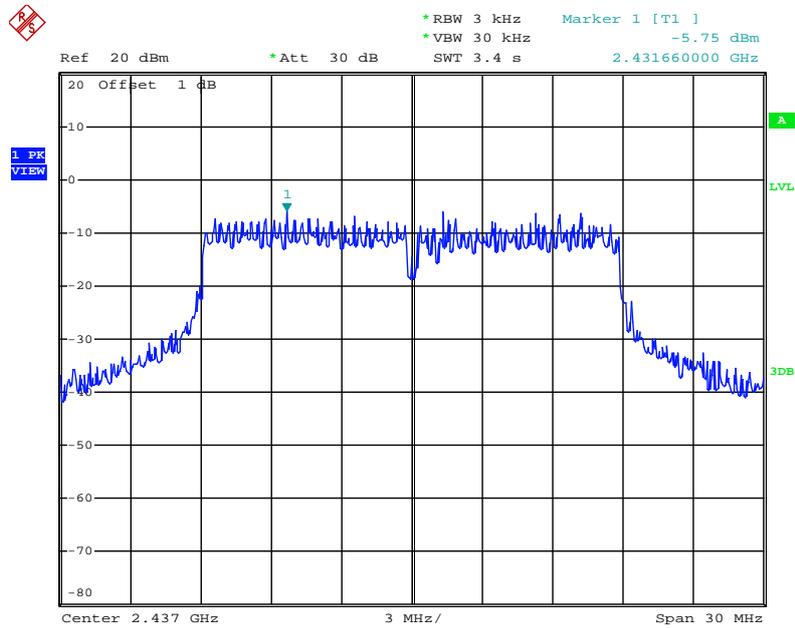


Date: 10.JUL.2014 15:43:12

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 3

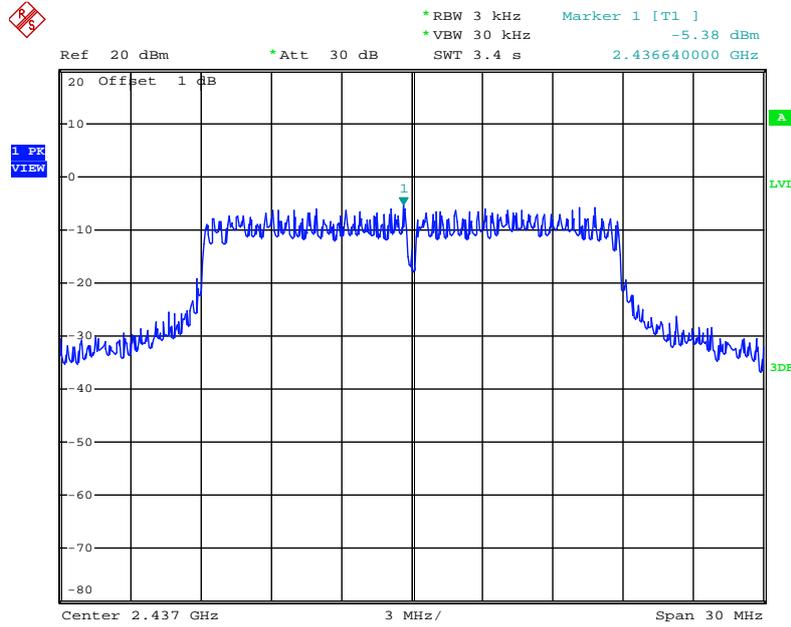


Date: 10.JUL.2014 15:42:11

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1

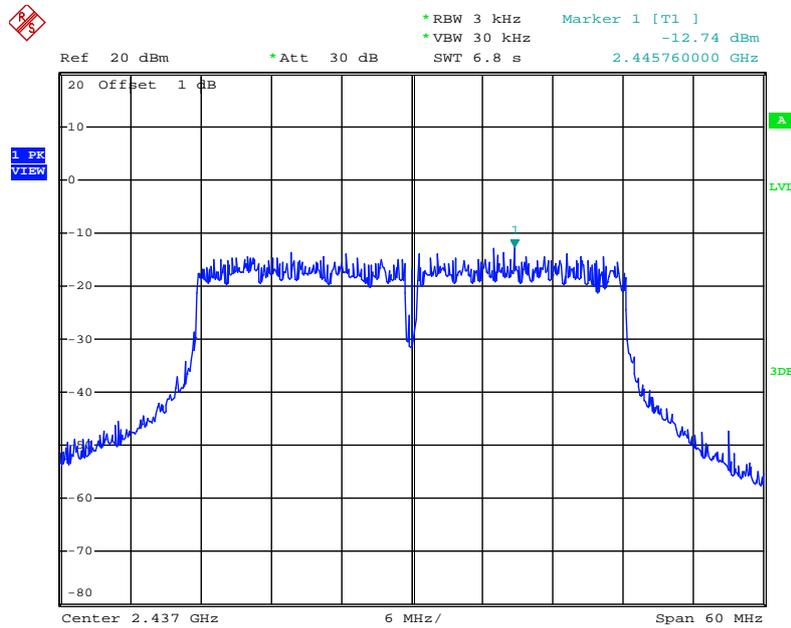


Date: 10.JUL.2014 15:48:06

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 2

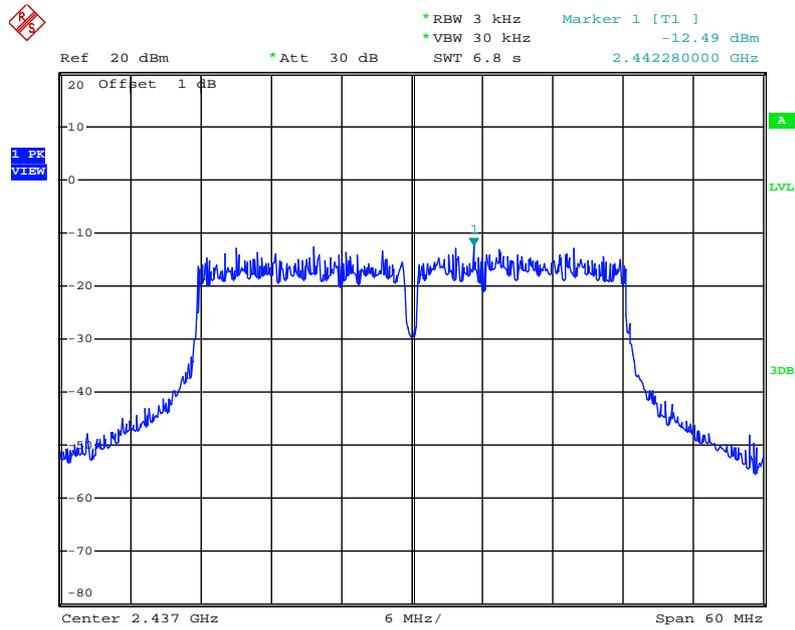


Date: 10.JUL.2014 15:50:14

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 3

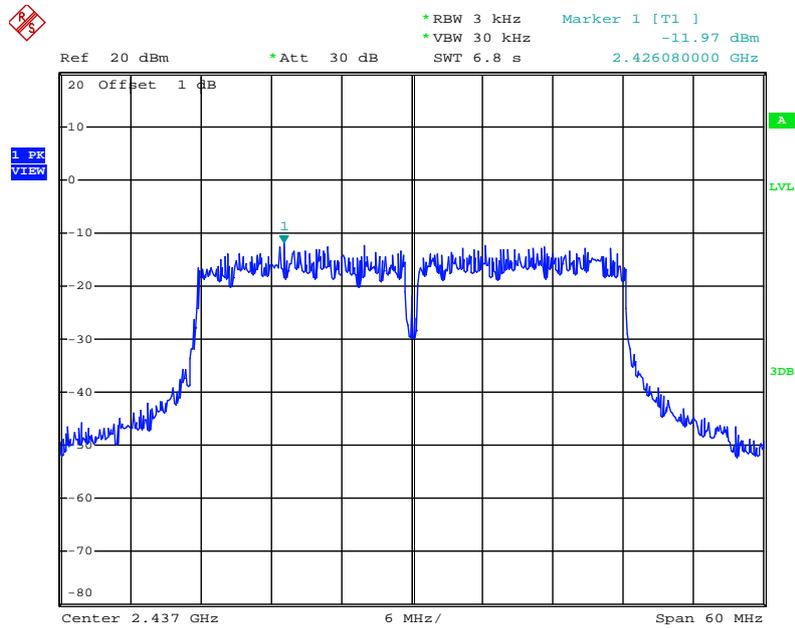


Date: 10.JUL.2014 15:50:54

Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 3

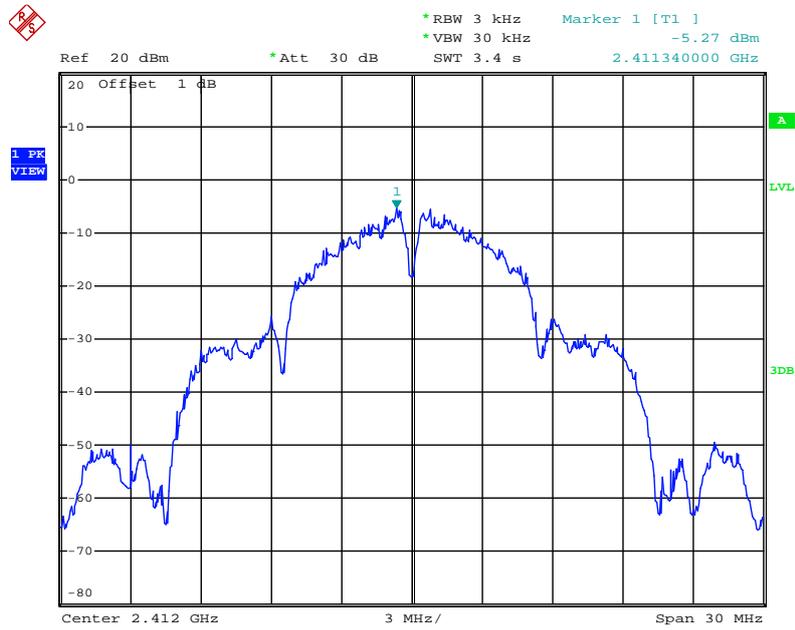


Date: 10.JUL.2014 15:27:40

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1

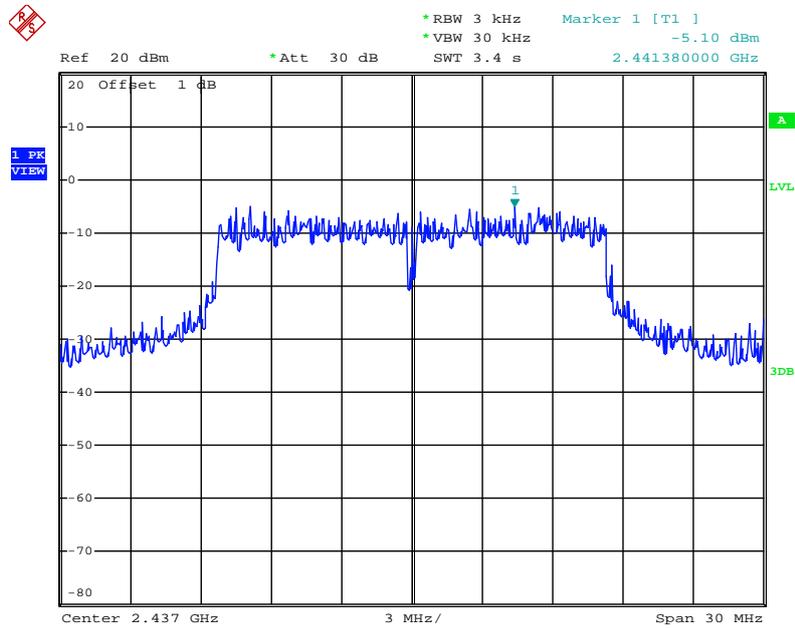


Date: 10.JUL.2014 15:37:29

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 2

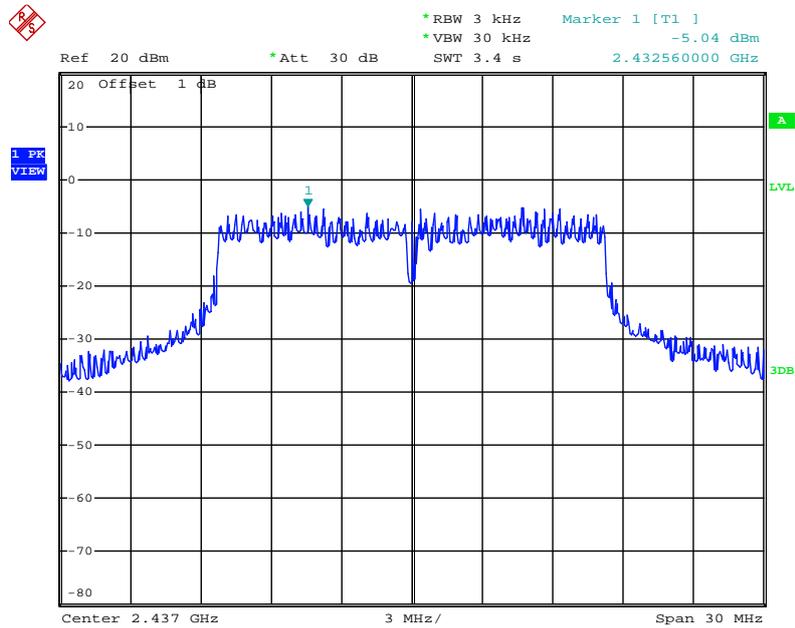

Date: 10.JUL.2014 15:36:24

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 3

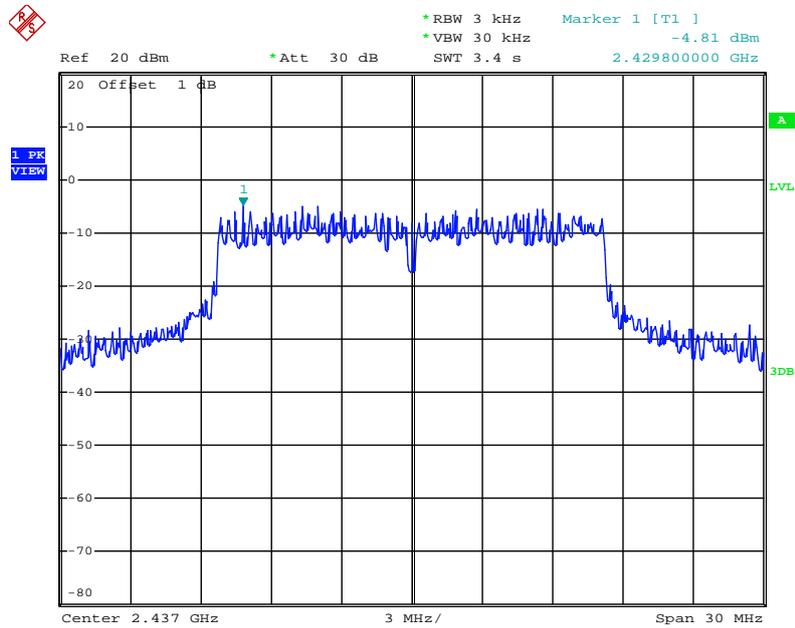

Date: 10.JUL.2014 15:36:49

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth= \Rightarrow 8.1 Option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	20°C	Humidity	60%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n

Configuration IEEE 802.11n MCS0 HT20 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.08	17.76	500	Complies
6	2437 MHz	16.08	18.40	500	Complies
11	2462 MHz	16.08	17.68	500	Complies

Configuration IEEE 802.11n MCS0 HT40 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	35.68	36.32	500	Complies
6	2437 MHz	35.84	36.16	500	Complies
9	2452 MHz	35.68	36.00	500	Complies

Temperature	20°C	Humidity	60%
Test Engineer	Benson Peng	Configurations	IEEE 802.11b/g

Configuration IEEE 802.11b / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	4.56	8.24	500	Complies
6	2437 MHz	5.28	8.40	500	Complies
11	2462 MHz	5.04	8.40	500	Complies


Configuration IEEE 802.11g / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	15.44	16.56	500	Complies
6	2437 MHz	15.68	18.48	500	Complies
11	2462 MHz	15.68	16.56	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2412 MHz / Chain 1 + Chain 2 + Chain 3

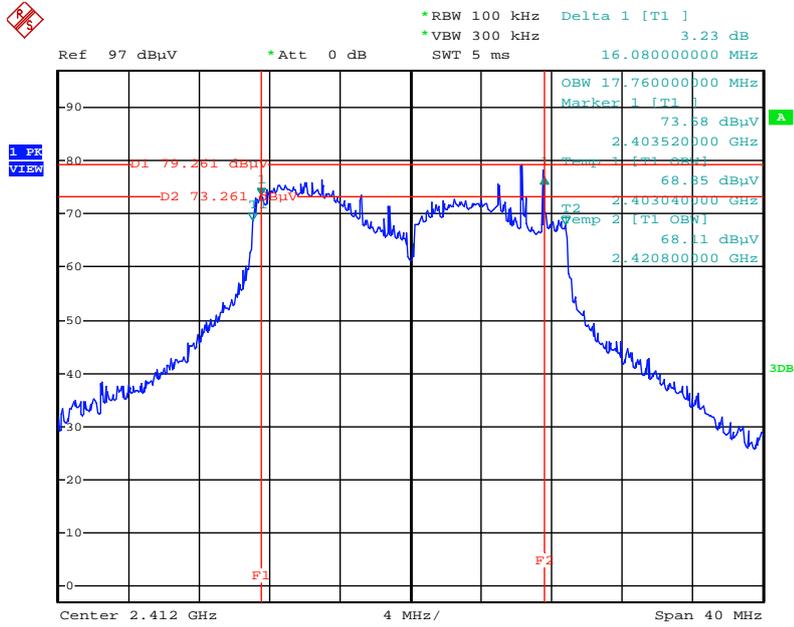


Date: 10.JUL.2014 12:29:55

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3

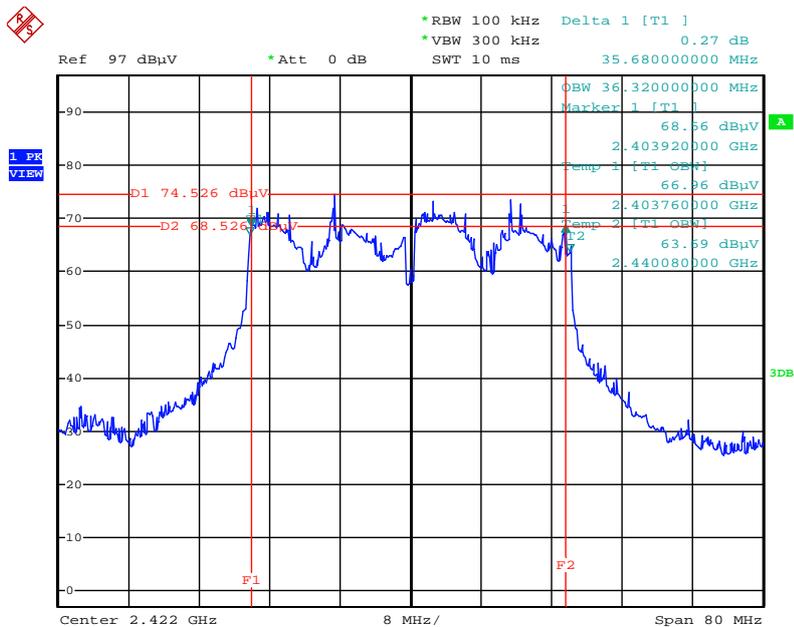


Date: 10.JUL.2014 12:32:17

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2 + Chain 3

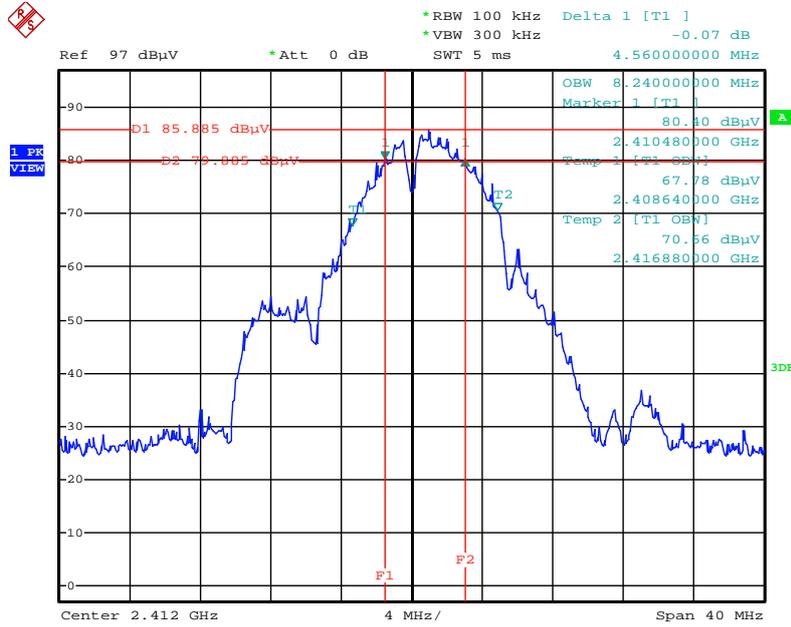

Date: 10.JUL.2014 12:25:11

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz / Chain 1 + Chain 2 + Chain 3

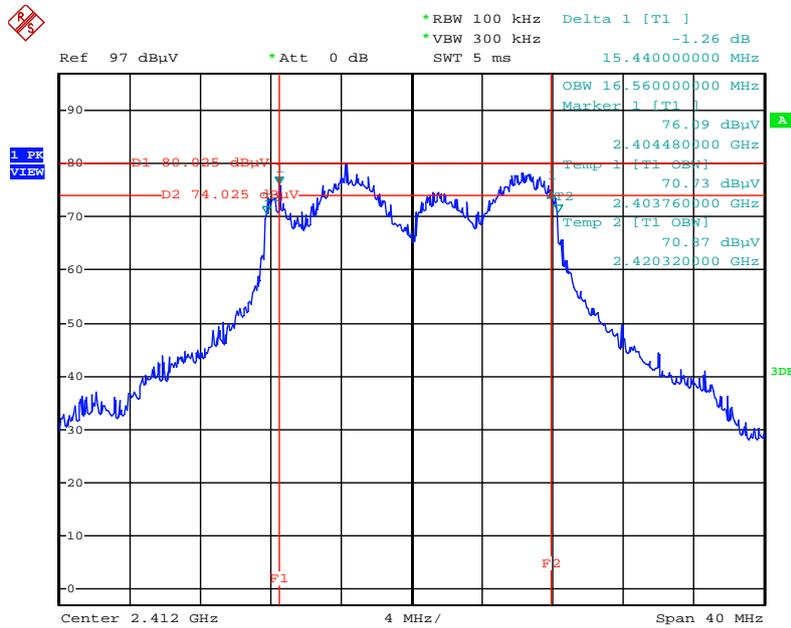

Date: 10.JUL.2014 12:29:28

4.5. Radiated Emissions Measurement

4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, Please refer to section 3.11 for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

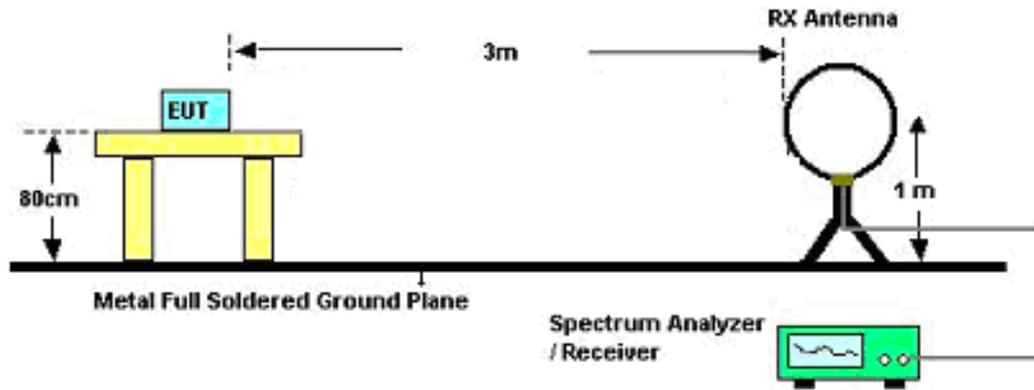

For Radiated Emissions: 30MHz~1GHz

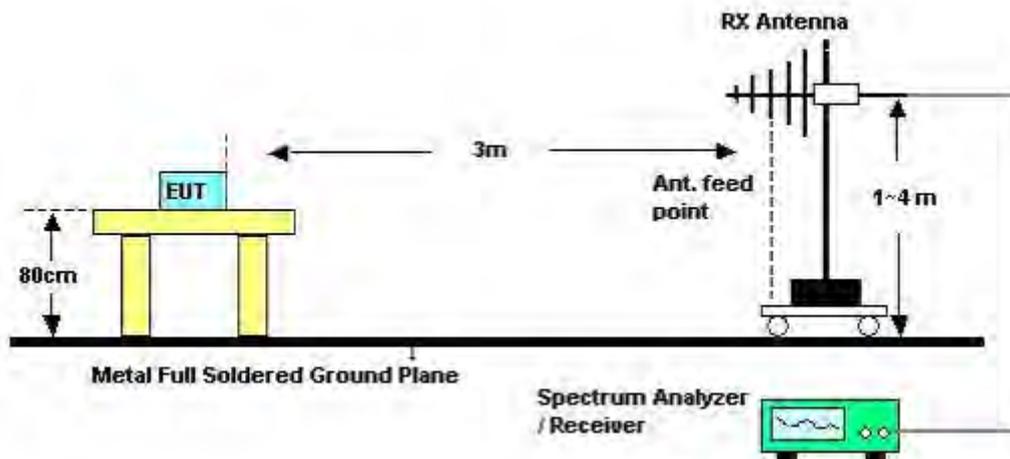

For Radiated Emissions: Above 1GHz

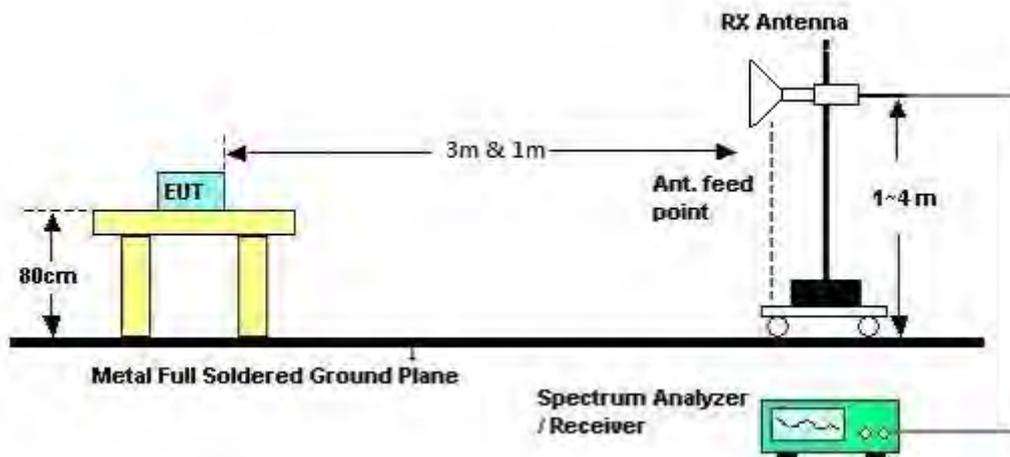

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

For EUT 1:

Temperature	23°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	CTX
Test Date	Jul. 14, 2014	Test Mode	Mode 3

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

For EUT 2:

Temperature	28°C	Humidity	62%
Test Engineer	YC Chen	Configurations	CTX
Test Date	Aug. 05, 2014	Test Mode	Mode 4

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)

For EUT 1:


Temperature	23°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	CTX
Test Mode	Mode 3		

Horizontal

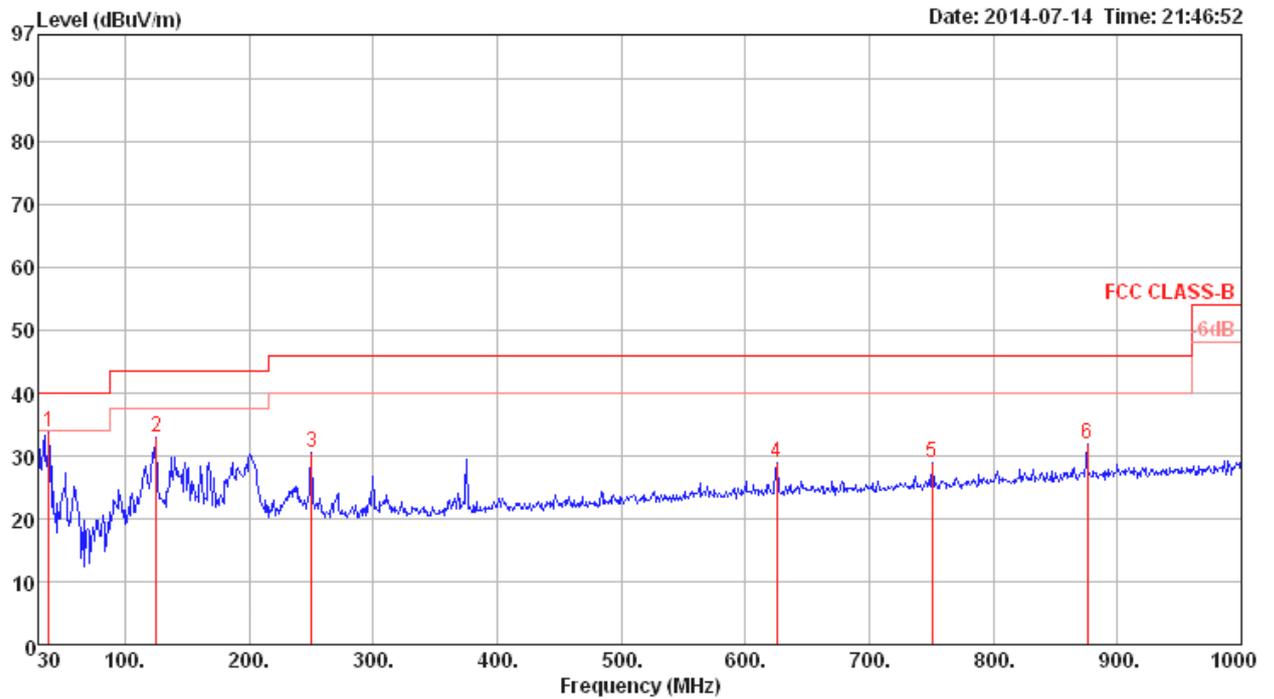

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	38.73	33.78	40.00	-6.22	47.21	0.67	13.70	27.80	QP	100	0	HORIZONTAL
2	125.06	32.94	43.50	-10.56	46.88	1.33	12.21	27.48	QP	100	0	HORIZONTAL
3	250.19	30.56	46.00	-15.44	43.01	1.78	12.77	27.00	QP	100	0	HORIZONTAL
4	625.58	28.96	46.00	-17.04	35.28	2.90	18.85	28.07	QP	100	0	HORIZONTAL
5	750.71	29.01	46.00	-16.99	34.18	3.20	19.43	27.80	QP	100	0	HORIZONTAL
6	875.84	31.89	46.00	-14.11	35.53	3.46	20.35	27.45	QP	100	0	HORIZONTAL

Vertical

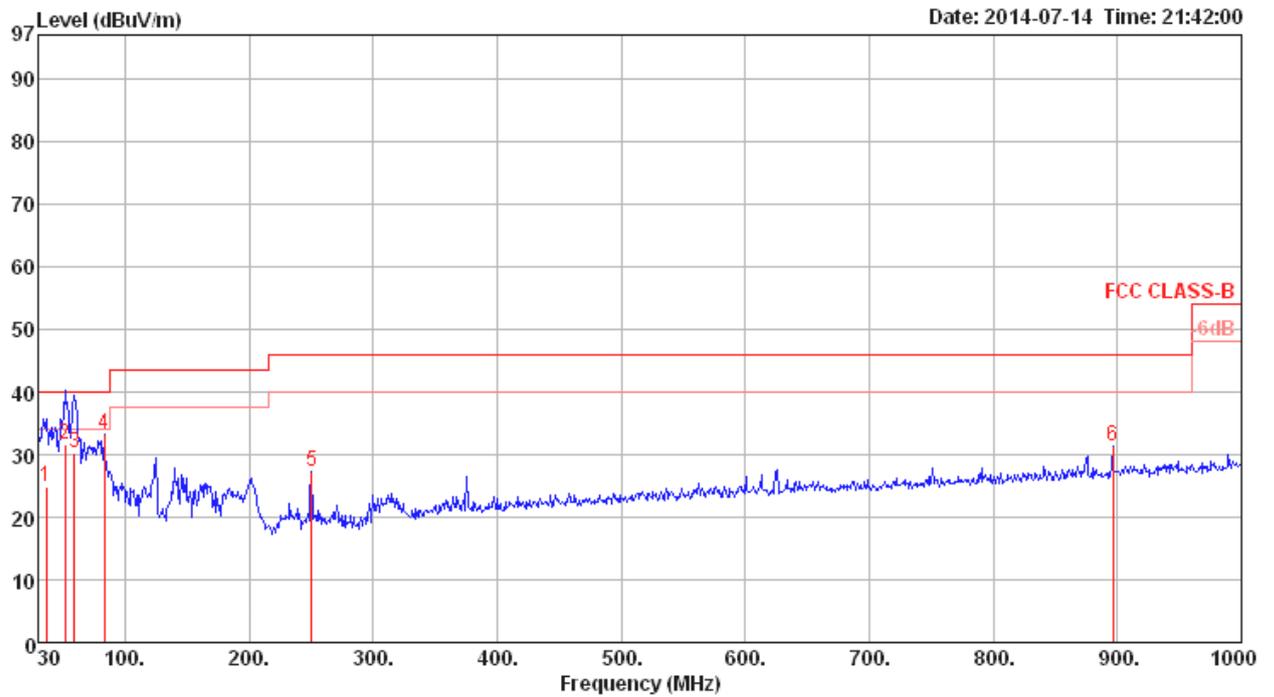

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	36.79	24.94	40.00	-15.06	37.17	0.68	14.89	27.80	100	65	VERTICAL
2	51.34	31.53	40.00	-8.47	50.11	0.86	8.35	27.79	100	251	VERTICAL
3	59.10	30.23	40.00	-9.77	50.14	0.90	6.95	27.76	100	56	VERTICAL
4	83.35	33.13	40.00	-6.87	52.02	1.07	7.71	27.67	400	0	VERTICAL
5	250.19	27.36	46.00	-18.64	39.81	1.78	12.77	27.00	400	0	VERTICAL
6	896.21	31.31	46.00	-14.69	34.68	3.54	20.50	27.41	400	0	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For EUT 2:


Temperature	28°C	Humidity	62%
Test Engineer	YC Chen	Configurations	CTX
Test Mode	Mode 4		

Horizontal

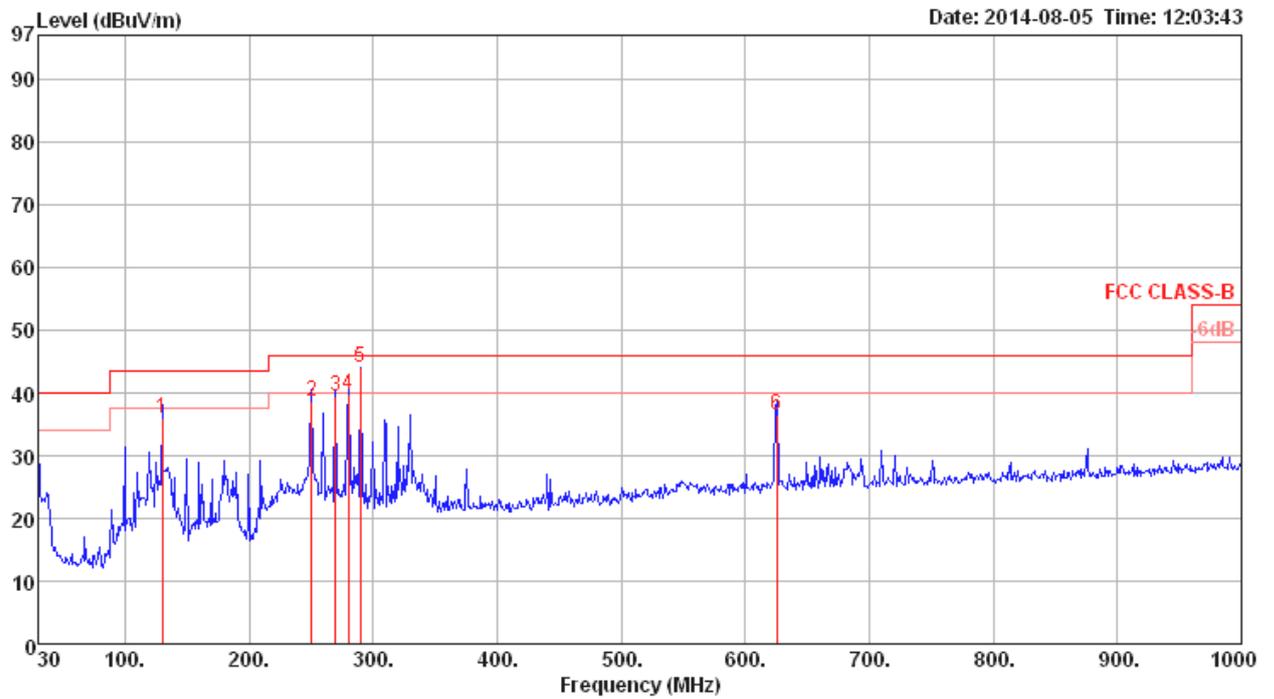

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	129.91	36.03	43.50	-7.47	49.85	1.37	12.26	27.45	QP	100	254	HORIZONTAL
2	250.19	38.52	46.00	-7.48	50.97	1.78	12.77	27.00	QP	100	333	HORIZONTAL
3	269.59	39.32	46.00	-6.68	51.40	1.88	13.00	26.96	QP	100	120	HORIZONTAL
4	280.26	39.61	46.00	-6.39	51.49	1.93	13.13	26.94	QP	100	156	HORIZONTAL
5	289.96	44.14	46.00	-1.86	55.84	1.98	13.24	26.92	QP	100	124	HORIZONTAL
6	625.58	36.57	46.00	-9.43	42.89	2.90	18.85	28.07	QP	100	323	HORIZONTAL

Vertical

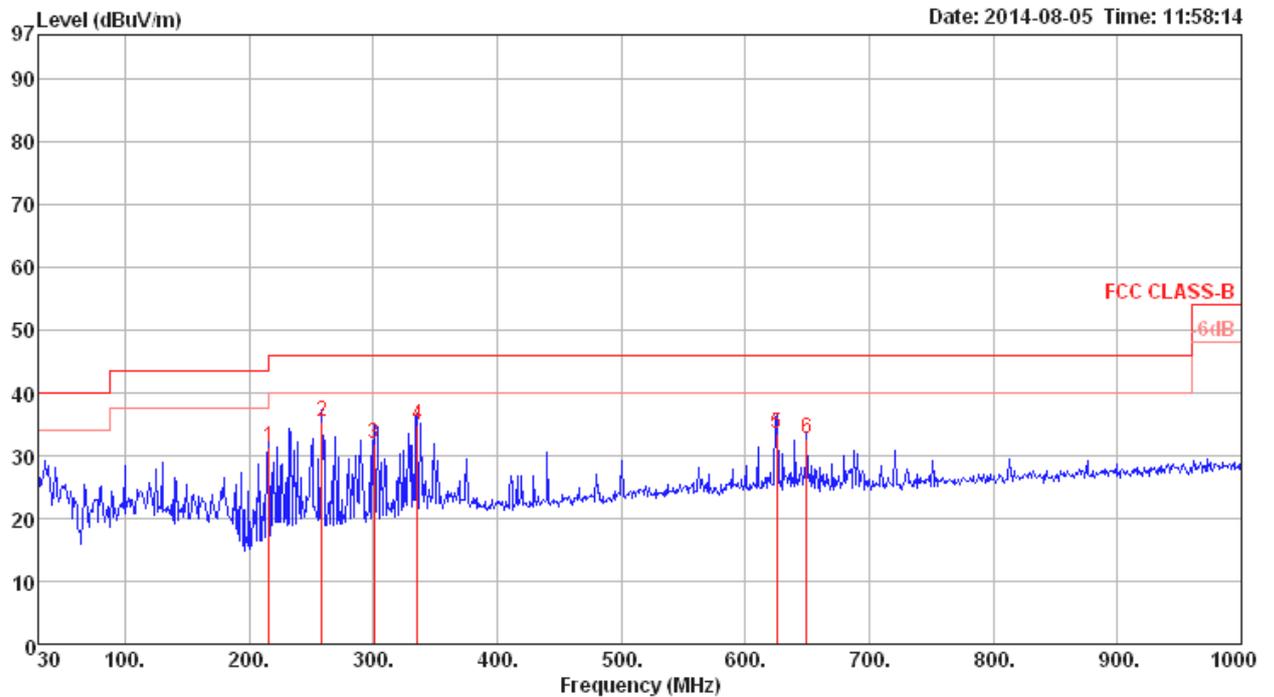

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	cm	deg	
1	216.24	31.43	46.00	-14.57	46.53	1.70	10.27	27.07	QP	100	124	VERTICAL
2	258.92	35.41	46.00	-10.59	47.70	1.82	12.87	26.98	QP	100	233	VERTICAL
3	300.63	31.87	46.00	-14.13	43.35	2.03	13.39	26.90	QP	100	111	VERTICAL
4	335.55	34.84	46.00	-11.16	45.58	2.08	14.33	27.15	QP	100	124	VERTICAL
5	625.58	33.38	46.00	-12.62	39.70	2.90	18.85	28.07	QP	100	222	VERTICAL
6	649.83	32.61	46.00	-13.39	38.74	2.99	18.93	28.05	QP	100	127	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

For EUT 1:

Temperature	23°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n MCS0 HT20 CH 1 / Chain 1 + Chain 2 + Chain 3
Test Date	Jun. 10, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4822.05	34.83	54.00	-19.17	32.88	3.31	33.56	34.92	Average	100	222	HORIZONTAL
2	4826.19	46.57	74.00	-27.43	44.62	3.31	33.56	34.92	Peak	100	222	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4822.56	33.67	54.00	-20.33	31.72	3.31	33.56	34.92	Average	100	46	VERTICAL
2	4822.72	46.67	74.00	-27.33	44.72	3.31	33.56	34.92	Peak	100	46	VERTICAL

Temperature	23°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n MCS0 HT20 CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Jun. 10, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4875.07	49.10	54.00	-4.90	47.03	3.33	33.66	34.92	Average	168	102	HORIZONTAL
2	4875.32	65.22	74.00	-8.78	63.15	3.33	33.66	34.92	Peak	168	102	HORIZONTAL
3	7311.07	32.94	54.00	-21.06	27.43	4.06	36.64	35.19	Average	100	346	HORIZONTAL
4	7313.09	45.08	74.00	-28.92	39.57	4.06	36.64	35.19	Peak	100	346	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.53	43.00	54.00	-11.00	40.93	3.33	33.66	34.92	Average	193	203	VERTICAL
2	4873.70	59.63	74.00	-14.37	57.56	3.33	33.66	34.92	Peak	193	203	VERTICAL
3	7312.22	35.62	54.00	-18.38	30.11	4.06	36.64	35.19	Average	100	305	VERTICAL
4	7313.46	45.51	74.00	-28.49	40.00	4.06	36.64	35.19	Peak	100	305	VERTICAL

Temperature	23°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n MCS0 HT20 CH 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Jun. 10, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4924.07	57.65	74.00	-16.35	55.45	3.35	33.76	34.91	Peak	165	97 HORIZONTAL
2	4925.66	41.02	54.00	-12.98	38.82	3.35	33.76	34.91	Average	165	97 HORIZONTAL
3	7387.02	46.54	74.00	-27.46	40.84	4.06	36.85	35.21	Peak	100	199 HORIZONTAL
4	7387.66	32.81	54.00	-21.19	27.11	4.06	36.85	35.21	Average	100	199 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4922.71	33.59	54.00	-20.41	31.39	3.35	33.76	34.91	Average	134	4 HORIZONTAL
2	4924.50	46.62	74.00	-27.38	44.42	3.35	33.76	34.91	Peak	134	4 HORIZONTAL
3	7386.90	46.16	74.00	-27.84	40.46	4.06	36.85	35.21	Peak	100	129 HORIZONTAL
4	7388.06	33.04	54.00	-20.96	27.34	4.06	36.85	35.21	Average	100	129 HORIZONTAL

Temperature	23°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n MCS0 HT40 CH 3 / Chain 1 + Chain 2 + Chain 3
Test Date	Jun. 10, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4844.41	42.62	74.00	-31.38	40.63	3.32	33.59	34.92	Peak	100	253	HORIZONTAL
2	4845.20	30.19	54.00	-23.81	28.20	3.32	33.59	34.92	Average	100	253	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4842.76	42.73	74.00	-31.27	40.74	3.32	33.59	34.92	Peak	100	350	VERTICAL
2	4844.23	30.26	54.00	-23.74	28.27	3.32	33.59	34.92	Average	100	350	VERTICAL

Temperature	23°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n MCS0 HT40 CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Jun. 10, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4873.82	45.59	74.00	-28.41	43.52	3.33	33.66	34.92	100	262	HORIZONTAL
2	4874.28	34.70	54.00	-19.30	32.63	3.33	33.66	34.92	100	262	HORIZONTAL
3	7309.24	46.21	74.00	-27.79	40.70	4.06	36.64	35.19	100	169	HORIZONTAL
4	7311.56	32.98	54.00	-21.02	27.47	4.06	36.64	35.19	100	169	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4871.95	44.13	74.00	-29.87	42.06	3.33	33.66	34.92	100	123	VERTICAL
2	4874.41	30.69	54.00	-23.31	28.62	3.33	33.66	34.92	100	123	VERTICAL
3	7309.09	46.32	74.00	-27.68	40.81	4.06	36.64	35.19	100	123	VERTICAL
4	7311.84	33.22	54.00	-20.78	27.71	4.06	36.64	35.19	100	123	VERTICAL

Temperature	23°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n MCS0 HT40 CH 9 / Chain 1 + Chain 2 + Chain 3
Test Date	Jun. 10, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4905.94	44.48	74.00	-29.52	42.32	3.34	33.73	34.91	Peak	100	211	HORIZONTAL
2	4906.30	32.06	54.00	-21.94	29.90	3.34	33.73	34.91	Average	100	211	HORIZONTAL
3	7354.18	32.65	54.00	-21.35	27.02	4.06	36.77	35.20	Average	100	335	HORIZONTAL
4	7357.53	45.44	74.00	-28.56	39.81	4.06	36.77	35.20	Peak	100	335	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4904.06	31.90	54.00	-22.10	29.74	3.34	33.73	34.91	Average	100	184	VERTICAL
2	4904.60	44.40	74.00	-29.60	42.24	3.34	33.73	34.91	Peak	100	184	VERTICAL
3	7355.91	45.09	74.00	-28.91	39.46	4.06	36.77	35.20	Peak	100	184	VERTICAL
4	7358.06	32.73	54.00	-21.27	27.10	4.06	36.77	35.20	Average	100	184	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	IEEE 802.11b CH 1 / Chain 1 + Chain 2 + Chain 3
Test Date	Jun. 09, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4824.01	53.44	54.00	-0.56	50.29	5.69	32.76	35.30	100	285	HORIZONTAL	Average
2	4824.04	56.43	74.00	-17.57	53.28	5.69	32.76	35.30	100	285	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4823.89	50.46	74.00	-23.54	47.31	5.69	32.76	35.30	118	207	VERTICAL	Peak
2	4824.01	46.24	54.00	-7.76	43.09	5.69	32.76	35.30	118	207	VERTICAL	Average

Temperature	23°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	IEEE 802.11b CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Jun. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4874.00	53.33	54.00	-0.67	50.09	5.75	32.80	35.31	100	254	HORIZONTAL	Average
2	4874.01	55.24	74.00	-18.76	52.00	5.75	32.80	35.31	100	254	HORIZONTAL	Peak
3	7313.94	49.46	74.00	-24.54	40.64	7.06	37.12	35.36	100	201	HORIZONTAL	Peak
4	7315.31	38.97	54.00	-15.03	30.15	7.06	37.12	35.36	100	201	HORIZONTAL	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4874.02	44.57	54.00	-9.43	41.33	5.75	32.80	35.31	100	216	VERTICAL	Average
2	4874.02	47.96	74.00	-26.04	44.72	5.75	32.80	35.31	100	216	VERTICAL	Peak
3	7307.04	38.96	54.00	-15.04	30.15	7.05	37.12	35.36	100	147	VERTICAL	Average
4	7312.76	50.30	74.00	-23.70	41.48	7.06	37.12	35.36	100	147	VERTICAL	Peak



Temperature	23°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	IEEE 802.11b CH 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Jun. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4923.88	55.81	74.00	-18.19	52.49	5.81	32.84	35.33	154	103	HORIZONTAL	Peak
2	4923.97	53.77	54.00	-0.23	50.45	5.81	32.84	35.33	154	103	HORIZONTAL	Average
3	7382.69	37.36	54.00	-16.64	28.44	7.08	37.16	35.32	100	221	HORIZONTAL	Average
4	7382.76	50.62	74.00	-23.38	41.70	7.08	37.16	35.32	100	221	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4923.82	49.88	74.00	-24.12	46.56	5.81	32.84	35.33	102	344	VERTICAL	Peak
2	4923.96	46.89	54.00	-7.11	43.57	5.81	32.84	35.33	102	344	VERTICAL	Average
3	7377.32	37.64	54.00	-16.36	28.73	7.08	37.15	35.32	100	155	VERTICAL	Average
4	7394.42	50.58	74.00	-23.42	41.64	7.09	37.16	35.31	100	155	VERTICAL	Peak

Temperature	23°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	IEEE 802.11g CH 1 / Chain 1 + Chain 2 + Chain 3
Test Date	Jun. 09, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4819.78	38.99	54.00	-15.01	35.85	5.68	32.76	35.30	199	299	HORIZONTAL	Average
2	4820.26	49.11	74.00	-24.89	45.97	5.68	32.76	35.30	199	299	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4823.86	37.11	54.00	-16.89	33.96	5.69	32.76	35.30	107	1	VERTICAL	Average
2	4823.90	47.85	74.00	-26.15	44.70	5.69	32.76	35.30	107	1	VERTICAL	Peak



Temperature	23°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	IEEE 802.11g CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Jun. 09, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4871.54	53.93	54.00	-0.07	50.70	5.74	32.80	35.31	147	91	HORIZONTAL Average
2	4871.88	66.62	74.00	-7.38	63.39	5.74	32.80	35.31	147	91	HORIZONTAL Peak
3	7308.14	39.90	54.00	-14.10	31.09	7.05	37.12	35.36	100	40	HORIZONTAL Average
4	7319.98	50.10	74.00	-23.90	41.26	7.06	37.13	35.35	100	40	HORIZONTAL Peak

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4873.72	47.29	54.00	-6.71	44.05	5.75	32.80	35.31	102	356	VERTICAL Average
2	4873.86	60.04	74.00	-13.96	56.80	5.75	32.80	35.31	102	356	VERTICAL Peak
3	7303.56	39.52	54.00	-14.48	30.71	7.05	37.12	35.36	100	302	VERTICAL Average
4	7306.10	50.12	74.00	-23.88	41.31	7.05	37.12	35.36	100	302	VERTICAL Peak

Temperature	23°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	IEEE 802.11g CH 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Jun. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4924.40	44.02	54.00	-9.98	40.70	5.81	32.84	35.33	125	108	HORIZONTAL	Average
2	4925.30	58.27	74.00	-15.73	54.95	5.81	32.84	35.33	125	108	HORIZONTAL	Peak
3	7356.00	49.86	74.00	-24.14	40.98	7.07	37.14	35.33	100	196	HORIZONTAL	Peak
4	7359.10	37.99	54.00	-16.01	29.09	7.08	37.15	35.33	100	196	HORIZONTAL	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4923.50	39.94	54.00	-14.06	36.63	5.81	32.83	35.33	102	354	VERTICAL	Average
2	4923.50	50.35	74.00	-23.65	47.04	5.81	32.83	35.33	102	354	VERTICAL	Peak
3	7351.00	49.78	74.00	-24.22	40.91	7.07	37.14	35.34	100	95	VERTICAL	Peak
4	7359.60	38.02	54.00	-15.98	29.12	7.08	37.15	35.33	100	95	VERTICAL	Average

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For EUT 2:

Temperature	28°C	Humidity	62%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 HT20 CH 1 / Chain 1 + Chain 2 + Chain 3
Test Date	Aug. 01, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4821.90	48.34	74.00	-25.66	46.39	3.31	33.56	34.92	Peak	100	77	HORIZONTAL
2	4822.27	33.65	54.00	-20.35	31.70	3.31	33.56	34.92	Average	100	77	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4824.13	43.38	74.00	-30.62	41.43	3.31	33.56	34.92	Peak	100	32	VERTICAL
2	4824.21	30.42	54.00	-23.58	28.47	3.31	33.56	34.92	Average	100	32	VERTICAL

Temperature	28°C	Humidity	62%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 HT20 CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Aug. 01, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4870.52	47.25	54.00	-6.75	45.18	3.33	33.66	34.92	Average	100	86	HORIZONTAL
2	4871.81	60.40	74.00	-13.60	58.33	3.33	33.66	34.92	Peak	100	86	HORIZONTAL
3	7306.55	47.29	74.00	-26.71	41.78	4.06	36.64	35.19	Peak	100	118	HORIZONTAL
4	7307.31	34.90	54.00	-19.10	29.39	4.06	36.64	35.19	Average	100	118	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4870.92	55.10	74.00	-18.90	53.03	3.33	33.66	34.92	Peak	100	276	VERTICAL
2	4871.82	45.96	54.00	-8.04	43.89	3.33	33.66	34.92	Average	100	276	VERTICAL
3	7306.71	34.88	54.00	-19.12	29.37	4.06	36.64	35.19	Average	100	313	VERTICAL
4	7315.94	48.58	74.00	-25.42	43.02	4.06	36.69	35.19	Peak	100	313	VERTICAL

Temperature	28°C	Humidity	62%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 HT20 CH 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Aug. 01, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4922.81	38.65	54.00	-15.35	36.45	3.35	33.76	34.91	Average	100	87 HORIZONTAL
2	4923.71	53.38	74.00	-20.62	51.18	3.35	33.76	34.91	Peak	100	87 HORIZONTAL
3	7385.25	34.18	54.00	-19.82	28.48	4.06	36.85	35.21	Average	100	270 HORIZONTAL
4	7386.15	47.51	74.00	-26.49	41.81	4.06	36.85	35.21	Peak	100	270 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4924.39	34.08	54.00	-19.92	31.88	3.35	33.76	34.91	Average	100	198 VERTICAL
2	4924.95	44.14	74.00	-29.86	41.94	3.35	33.76	34.91	Peak	100	198 VERTICAL
3	7386.82	47.00	74.00	-27.00	41.30	4.06	36.85	35.21	Peak	100	16 VERTICAL
4	7386.88	34.37	54.00	-19.63	28.67	4.06	36.85	35.21	Average	100	16 VERTICAL



Temperature	28°C	Humidity	62%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 HT40 CH 3 / Chain 1 + Chain 2 + Chain 3
Test Date	Aug. 01, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4840.92	42.96	74.00	-31.04	40.97	3.32	33.59	34.92	Peak	100	171	HORIZONTAL
2	4842.81	32.11	54.00	-21.89	30.12	3.32	33.59	34.92	Average	100	171	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4839.37	30.33	54.00	-23.67	28.34	3.32	33.59	34.92	Average	100	62	VERTICAL
2	4839.82	43.29	74.00	-30.71	41.30	3.32	33.59	34.92	Peak	100	62	VERTICAL

Temperature	28°C	Humidity	62%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 HT40 CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Aug. 01, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4869.63	33.81	54.00	-20.19	31.74	3.33	33.66	34.92	100	186	HORIZONTAL
2	4878.41	45.00	74.00	-29.00	42.93	3.33	33.66	34.92	100	186	HORIZONTAL
3	7307.39	47.05	74.00	-26.95	41.54	4.06	36.64	35.19	100	225	HORIZONTAL
4	7314.48	33.66	54.00	-20.34	28.15	4.06	36.64	35.19	100	225	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4869.27	29.93	54.00	-24.07	27.86	3.33	33.66	34.92	100	154	VERTICAL
2	4878.94	42.84	74.00	-31.16	40.77	3.33	33.66	34.92	100	154	VERTICAL
3	7308.16	47.41	74.00	-26.59	41.90	4.06	36.64	35.19	100	177	VERTICAL
4	7313.98	33.71	54.00	-20.29	28.20	4.06	36.64	35.19	100	177	VERTICAL

Temperature	28°C	Humidity	62%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 HT40 CH 9 / Chain 1 + Chain 2 + Chain 3
Test Date	Aug. 01, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4901.72	30.31	54.00	-23.69	28.15	3.34	33.73	34.91	Average	100	66 HORIZONTAL
2	4902.64	42.97	74.00	-31.03	40.81	3.34	33.73	34.91	Peak	100	66 HORIZONTAL
3	7357.89	47.00	74.00	-27.00	41.37	4.06	36.77	35.20	Peak	100	140 HORIZONTAL
4	7359.91	34.01	54.00	-19.99	28.38	4.06	36.77	35.20	Average	100	140 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4901.02	43.17	74.00	-30.83	41.05	3.34	33.69	34.91	Peak	100	109 VERTICAL
2	4901.04	30.55	54.00	-23.45	28.43	3.34	33.69	34.91	Average	100	109 VERTICAL
3	7355.92	34.22	54.00	-19.78	28.59	4.06	36.77	35.20	Average	100	81 VERTICAL
4	7359.14	47.07	74.00	-26.93	41.44	4.06	36.77	35.20	Peak	100	81 VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Temperature	28°C	Humidity	62%
Test Engineer	YC Chen	Configurations	IEEE 802.11b CH 1 / Chain 1 + Chain 2 + Chain 3
Test Date	Aug. 01, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4823.93	53.54	54.00	-0.46	51.59	3.31	33.56	34.92	Average	101	95 HORIZONTAL
2	4824.00	55.86	74.00	-18.14	53.91	3.31	33.56	34.92	Peak	101	95 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4823.97	53.82	54.00	-0.18	51.87	3.31	33.56	34.92	Average	101	188 VERTICAL
2	4823.97	56.00	74.00	-18.00	54.05	3.31	33.56	34.92	Peak	101	188 VERTICAL



Temperature	28°C	Humidity	62%
Test Engineer	YC Chen	Configurations	IEEE 802.11b CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Aug. 01, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.99	53.69	54.00	-0.31	51.62	3.33	33.66	34.92	Average	100	94	HORIZONTAL
2	4874.03	56.19	74.00	-17.81	54.12	3.33	33.66	34.92	Peak	100	94	HORIZONTAL
3	7312.14	40.48	54.00	-13.52	34.97	4.06	36.64	35.19	Average	100	247	HORIZONTAL
4	7312.65	49.70	74.00	-24.30	44.19	4.06	36.64	35.19	Peak	100	247	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.92	55.33	74.00	-18.67	53.26	3.33	33.66	34.92	Peak	110	181	VERTICAL
2	4873.99	52.96	54.00	-1.04	50.89	3.33	33.66	34.92	Average	110	181	VERTICAL
3	7309.59	47.11	74.00	-26.89	41.60	4.06	36.64	35.19	Peak	100	27	VERTICAL
4	7312.60	34.87	54.00	-19.13	29.36	4.06	36.64	35.19	Average	100	27	VERTICAL



Temperature	28°C	Humidity	62%
Test Engineer	YC Chen	Configurations	IEEE 802.11b CH 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Aug. 01, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4923.95	55.72	74.00	-18.28	53.52	3.35	33.76	34.91	100	89	HORIZONTAL
2	4923.98	53.82	54.00	-0.18	51.62	3.35	33.76	34.91	100	89	HORIZONTAL
3	7385.06	48.94	74.00	-25.06	43.24	4.06	36.85	35.21	126	248	HORIZONTAL
4	7385.20	39.44	54.00	-14.56	33.74	4.06	36.85	35.21	126	248	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4923.98	48.73	54.00	-5.27	46.53	3.35	33.76	34.91	101	279	VERTICAL
2	4924.00	52.22	74.00	-21.78	50.02	3.35	33.76	34.91	101	279	VERTICAL
3	7384.14	34.29	54.00	-19.71	28.59	4.06	36.85	35.21	101	232	VERTICAL
4	7389.72	47.32	74.00	-26.68	41.62	4.06	36.85	35.21	101	232	VERTICAL



Temperature	28°C	Humidity	62%
Test Engineer	YC Chen	Configurations	IEEE 802.11g CH 1 / Chain 1 + Chain 2 + Chain 3
Test Date	Aug. 01, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4822.40	52.55	74.00	-21.45	50.60	3.31	33.56	34.92	Peak	101	77	HORIZONTAL
2	4822.96	38.37	54.00	-15.63	36.42	3.31	33.56	34.92	Average	101	77	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4822.96	35.37	54.00	-18.63	33.42	3.31	33.56	34.92	Average	101	209	VERTICAL
2	4822.96	48.15	74.00	-25.85	46.20	3.31	33.56	34.92	Peak	101	209	VERTICAL



Temperature	28°C	Humidity	62%
Test Engineer	YC Chen	Configurations	IEEE 802.11g CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Aug. 01, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4871.95	51.35	54.00	-2.65	49.28	3.33	33.66	34.92	Average	100	74	HORIZONTAL
2	4872.62	64.57	74.00	-9.43	62.50	3.33	33.66	34.92	Peak	100	74	HORIZONTAL
3	7308.48	60.79	74.00	-13.21	55.28	4.06	36.64	35.19	Peak	100	248	HORIZONTAL
4	7309.61	45.34	54.00	-8.66	39.83	4.06	36.64	35.19	Average	100	248	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4871.63	61.42	74.00	-12.58	59.35	3.33	33.66	34.92	Peak	100	211	VERTICAL
2	4872.27	48.70	54.00	-5.30	46.63	3.33	33.66	34.92	Average	100	211	VERTICAL
3	7308.18	48.84	74.00	-25.16	43.33	4.06	36.64	35.19	Peak	100	57	VERTICAL
4	7313.85	36.51	54.00	-17.49	31.00	4.06	36.64	35.19	Average	100	57	VERTICAL

Temperature	28°C	Humidity	62%
Test Engineer	YC Chen	Configurations	IEEE 802.11g CH 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Aug. 01, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4922.35	56.30	74.00	-17.70	54.10	3.35	33.76	34.91	Peak	100	89	HORIZONTAL
2	4922.77	42.09	54.00	-11.91	39.89	3.35	33.76	34.91	Average	100	89	HORIZONTAL
3	7383.31	36.76	54.00	-17.24	31.10	4.06	36.81	35.21	Average	100	288	HORIZONTAL
4	7383.40	50.36	74.00	-23.64	44.70	4.06	36.81	35.21	Peak	100	288	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4920.94	51.36	74.00	-22.64	49.16	3.35	33.76	34.91	Peak	100	75	VERTICAL
2	4923.76	38.45	54.00	-15.55	36.25	3.35	33.76	34.91	Average	100	75	VERTICAL
3	7381.24	35.74	54.00	-18.26	30.08	4.06	36.81	35.21	Average	100	50	VERTICAL
4	7388.98	48.17	74.00	-25.83	42.47	4.06	36.85	35.21	Peak	100	50	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Emissions Measurement

4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, Please refer to section 3.11 for Average
RBW / VBW (30dBc in any 100 kHz bandwidth emission)	100 kHz / 300 kHz for Peak

4.6.3. Test Procedures

For Radiated band edges Measurement:

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around band edges.

For Radiated Out of Band Emission Measurement:

1. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure.
2. The radiated emission test is performed on each TX port of operating mode without summing or adding 10log (N) since the limit is relative emission limit.
Only worst data of each operating mode is presented.

4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

For EUT 1:

Temperature	23°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n MCS0 HT20 CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Jun. 09, 2014		

Channel 1

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2390.00	53.68	54.00	-0.32	22.10	3.68	27.90	0.00	101	298	HORIZONTAL Average
2	2391.20	73.72	74.00	-0.28	42.14	3.68	27.90	0.00	101	298	HORIZONTAL Peak
3	2410.90	99.43			67.84	3.69	27.90	0.00	101	298	HORIZONTAL Average
4	2411.00	110.53			78.94	3.69	27.90	0.00	101	298	HORIZONTAL Peak

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2390.00	53.65	54.00	-0.35	22.07	3.68	27.90	0.00	100	266	HORIZONTAL Average
2	2390.00	69.55	74.00	-4.45	37.97	3.68	27.90	0.00	100	266	HORIZONTAL Peak
3	2430.60	107.06			75.46	3.70	27.90	0.00	100	266	HORIZONTAL Average
4	2430.60	118.29			86.69	3.70	27.90	0.00	100	266	HORIZONTAL Peak
5	2489.10	52.51	54.00	-1.49	20.88	3.73	27.90	0.00	100	266	HORIZONTAL Average
6	2489.10	69.95	74.00	-4.05	38.32	3.73	27.90	0.00	100	266	HORIZONTAL Peak

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2465.50	100.43			68.81	3.72	27.90	0.00	101	259	HORIZONTAL Average
2	2466.30	111.87			80.25	3.72	27.90	0.00	101	259	HORIZONTAL Peak
3	2484.70	49.17	54.00	-4.83	17.54	3.73	27.90	0.00	101	259	HORIZONTAL Average
4	2485.50	73.22	74.00	-0.78	41.59	3.73	27.90	0.00	101	259	HORIZONTAL Peak

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	23°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n MCS0 HT40 CH 3, 6, 9 / Chain 1 + Chain 2 + Chain 3
Test Date	Jun. 09, 2014		

Channel 3

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2383.80	67.08	74.00	-6.92	35.50	3.68	27.90	0.00	100	241	HORIZONTAL Peak
2	2390.00	53.59	54.00	-0.41	22.01	3.68	27.90	0.00	100	241	HORIZONTAL Average
3	2432.60	105.99			74.39	3.70	27.90	0.00	100	241	HORIZONTAL Peak
4	2432.80	95.55			63.95	3.70	27.90	0.00	100	241	HORIZONTAL Average

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2386.20	51.15	54.00	-2.85	19.57	3.68	27.90	0.00	100	265	HORIZONTAL Average
2	2387.20	70.87	74.00	-3.13	39.29	3.68	27.90	0.00	100	265	HORIZONTAL Peak
3	2445.80	97.18			65.57	3.71	27.90	0.00	100	265	HORIZONTAL Average
4	2446.40	109.53			77.92	3.71	27.90	0.00	100	265	HORIZONTAL Peak
5	2485.30	50.58	54.00	-3.42	18.95	3.73	27.90	0.00	100	265	HORIZONTAL Average
6	2485.90	73.75	74.00	-0.25	42.12	3.73	27.90	0.00	100	265	HORIZONTAL Peak

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2440.00	97.52			65.91	3.71	27.90	0.00	102	121	HORIZONTAL Average
2	2441.20	110.38			78.77	3.71	27.90	0.00	102	121	HORIZONTAL Peak
3	2483.50	52.75	54.00	-1.25	21.12	3.73	27.90	0.00	102	121	HORIZONTAL Average
4	2484.50	73.81	74.00	-0.19	42.18	3.73	27.90	0.00	102	121	HORIZONTAL Peak

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	IEEE 802.11b CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Jun. 09, 2014		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2371.20	45.24	54.00	-8.76	13.67	3.67	27.90	0.00	100	271	HORIZONTAL	Average
2	2371.80	58.45	74.00	-15.55	26.88	3.67	27.90	0.00	100	271	HORIZONTAL	Peak
3	2411.20	112.97			81.38	3.69	27.90	0.00	100	271	HORIZONTAL	Peak
4	2411.30	110.60			79.01	3.69	27.90	0.00	100	271	HORIZONTAL	Average

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2357.00	64.84	74.00	-9.16	33.28	3.66	27.90	0.00	100	269	HORIZONTAL	Peak
2	2360.20	44.59	54.00	-9.41	13.03	3.66	27.90	0.00	100	269	HORIZONTAL	Average
3	2437.80	109.16			77.55	3.71	27.90	0.00	100	269	HORIZONTAL	Average
4	2438.00	111.58			79.97	3.71	27.90	0.00	100	269	HORIZONTAL	Peak
5	2487.70	41.56	54.00	-12.44	9.93	3.73	27.90	0.00	100	269	HORIZONTAL	Average
6	2490.50	58.19	74.00	-15.81	26.56	3.73	27.90	0.00	100	269	HORIZONTAL	Peak

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2461.20	107.32			75.70	3.72	27.90	0.00	102	279	HORIZONTAL	Average
2	2461.20	109.74			78.12	3.72	27.90	0.00	102	279	HORIZONTAL	Peak
3	2492.10	57.00	74.00	-17.00	25.36	3.74	27.90	0.00	102	279	HORIZONTAL	Peak
4	2499.80	42.68	54.00	-11.32	11.04	3.74	27.90	0.00	102	279	HORIZONTAL	Average

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	23°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	IEEE 802.11g CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Jun. 09, 2014		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2389.20	73.66	74.00	-0.34	42.08	3.68	27.90	0.00	101	299	HORIZONTAL	Peak
2	2390.00	53.56	54.00	-0.44	21.98	3.68	27.90	0.00	101	299	HORIZONTAL	Average
3	2409.00	101.28			69.69	3.69	27.90	0.00	101	299	HORIZONTAL	Average
4	2413.70	112.52			80.93	3.69	27.90	0.00	101	299	HORIZONTAL	Peak

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2382.20	51.91	54.00	-2.09	20.33	3.68	27.90	0.00	100	267	HORIZONTAL	Average
2	2382.20	70.72	74.00	-3.28	39.14	3.68	27.90	0.00	100	267	HORIZONTAL	Peak
3	2431.60	107.36			75.76	3.70	27.90	0.00	100	267	HORIZONTAL	Average
4	2441.40	118.69			87.08	3.71	27.90	0.00	100	267	HORIZONTAL	Peak
5	2485.30	72.16	74.00	-1.84	40.53	3.73	27.90	0.00	100	267	HORIZONTAL	Peak
6	2485.50	53.36	54.00	-0.64	21.73	3.73	27.90	0.00	100	267	HORIZONTAL	Average

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2456.20	115.01			83.39	3.72	27.90	0.00	100	266	HORIZONTAL	Peak
2	2456.40	103.20			71.58	3.72	27.90	0.00	100	266	HORIZONTAL	Average
3	2486.10	52.03	54.00	-1.97	20.40	3.73	27.90	0.00	100	266	HORIZONTAL	Average
4	2486.30	73.34	74.00	-0.66	41.71	3.73	27.90	0.00	100	266	HORIZONTAL	Peak

Item 1, 2 are the fundamental frequency at 2462 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For EUT 2:

Temperature	28°C	Humidity	62%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 HT20 CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Jul. 31, 2014		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.36	67.19	74.00	-6.81	36.49	2.21	28.49	0.00	Peak	100	83	HORIZONTAL
2	2390.00	53.34	54.00	-0.66	22.63	2.22	28.49	0.00	Average	100	83	HORIZONTAL
3	2417.29	109.81			79.05	2.23	28.53	0.00	Peak	100	83	HORIZONTAL
4	2420.17	100.08			69.29	2.23	28.56	0.00	Average	100	83	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.68	71.31	74.00	-2.69	40.61	2.21	28.49	0.00	Peak	100	85	HORIZONTAL
2	2390.00	53.29	54.00	-0.71	22.58	2.22	28.49	0.00	Average	100	85	HORIZONTAL
3	2430.27	119.57			88.78	2.23	28.56	0.00	Peak	100	85	HORIZONTAL
4	2430.59	110.42			79.63	2.23	28.56	0.00	Average	100	85	HORIZONTAL
5	2483.50	53.38	54.00	-0.62	22.45	2.26	28.67	0.00	Average	100	85	HORIZONTAL
6	2491.83	70.98	74.00	-3.02	40.01	2.27	28.70	0.00	Peak	100	85	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2467.77	112.83			81.94	2.26	28.63	0.00	Peak	100	89	HORIZONTAL
2	2469.05	103.14			72.25	2.26	28.63	0.00	Average	100	89	HORIZONTAL
3	2483.66	50.61	54.00	-3.39	19.68	2.26	28.67	0.00	Average	100	89	HORIZONTAL
4	2484.94	73.32	74.00	-0.68	42.39	2.26	28.67	0.00	Peak	100	89	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	28°C	Humidity	62%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 HT40 CH 3, 6, 9 / Chain 1 + Chain 2 + Chain 3
Test Date	Jul. 31, 2014		

Channel 3

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.68	67.54	74.00	-6.46	36.84	2.21	28.49	0.00	Peak	100	77	HORIZONTAL
2	2390.00	53.90	54.00	-0.10	23.19	2.22	28.49	0.00	Average	100	77	HORIZONTAL
3	2430.97	96.35			65.56	2.23	28.56	0.00	Average	100	77	HORIZONTAL
4	2432.58	105.71			74.92	2.23	28.56	0.00	Peak	100	77	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2386.60	49.38	54.00	-4.62	18.68	2.21	28.49	0.00	Average	101	90	HORIZONTAL
2	2386.60	63.38	74.00	-10.62	32.68	2.21	28.49	0.00	Peak	101	90	HORIZONTAL
3	2443.41	111.29			80.45	2.24	28.60	0.00	Peak	101	90	HORIZONTAL
4	2444.37	101.63			70.79	2.24	28.60	0.00	Average	101	90	HORIZONTAL
5	2483.82	53.17	54.00	-0.83	22.24	2.26	28.67	0.00	Average	101	90	HORIZONTAL
6	2483.82	68.99	74.00	-5.01	38.06	2.26	28.67	0.00	Peak	101	90	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2448.47	110.31			79.47	2.24	28.60	0.00	Peak	101	89	HORIZONTAL
2	2448.80	101.33			70.49	2.24	28.60	0.00	Average	101	89	HORIZONTAL
3	2488.31	73.00	74.00	-1.00	42.04	2.26	28.70	0.00	Peak	101	89	HORIZONTAL
4	2489.91	53.90	54.00	-0.10	22.94	2.26	28.70	0.00	Average	101	89	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	28°C	Humidity	62%
Test Engineer	YC Chen	Configurations	IEEE 802.11b CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Aug. 01, 2014		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2388.88	60.33	74.00	-13.67	29.63	2.21	28.49	0.00	Peak	100	79	HORIZONTAL
2	2389.04	48.84	54.00	-5.16	18.14	2.21	28.49	0.00	Average	100	79	HORIZONTAL
3	2412.80	114.31			83.56	2.22	28.53	0.00	Average	100	79	HORIZONTAL
4	2412.96	118.03			87.28	2.22	28.53	0.00	Peak	100	79	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.20	57.81	74.00	-16.19	27.11	2.21	28.49	0.00	Peak	100	91	HORIZONTAL
2	2390.00	47.04	54.00	-6.96	16.33	2.22	28.49	0.00	Average	100	91	HORIZONTAL
3	2436.04	117.57			86.78	2.23	28.56	0.00	Peak	100	91	HORIZONTAL
4	2436.36	114.09			83.30	2.23	28.56	0.00	Average	100	91	HORIZONTAL
5	2479.90	52.98	54.00	-1.02	22.05	2.26	28.67	0.00	Average	100	91	HORIZONTAL
6	2479.90	57.98	74.00	-16.02	27.05	2.26	28.67	0.00	Peak	100	91	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2461.36	110.03			79.16	2.24	28.63	0.00	Average	100	35	HORIZONTAL
2	2462.96	113.51			82.64	2.24	28.63	0.00	Peak	100	35	HORIZONTAL
3	2483.50	46.92	54.00	-7.08	15.99	2.26	28.67	0.00	Average	100	35	HORIZONTAL
4	2484.62	58.46	74.00	-15.54	27.53	2.26	28.67	0.00	Peak	100	35	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	28°C	Humidity	62%
Test Engineer	YC Chen	Configurations	IEEE 802.11g CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Aug. 01, 2014		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.84	71.44	74.00	-2.56	40.73	2.22	28.49	0.00	Peak	100	78	HORIZONTAL
2	2390.00	53.52	54.00	-0.48	22.81	2.22	28.49	0.00	Average	100	78	HORIZONTAL
3	2406.07	113.79			83.04	2.22	28.53	0.00	Peak	100	78	HORIZONTAL
4	2406.39	104.16			73.41	2.22	28.53	0.00	Average	100	78	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	53.28	54.00	-0.72	22.57	2.22	28.49	0.00	Average	100	87	HORIZONTAL
2	2390.00	69.28	74.00	-4.72	38.57	2.22	28.49	0.00	Peak	100	87	HORIZONTAL
3	2440.53	110.48			79.65	2.23	28.60	0.00	Average	100	87	HORIZONTAL
4	2441.49	120.09			89.25	2.24	28.60	0.00	Peak	100	87	HORIZONTAL
5	2483.50	53.74	54.00	-0.26	22.81	2.26	28.67	0.00	Average	100	87	HORIZONTAL
6	2491.83	71.26	74.00	-2.74	40.29	2.27	28.70	0.00	Peak	100	87	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2455.59	105.91			75.04	2.24	28.63	0.00	Average	100	88	HORIZONTAL
2	2455.59	116.30			85.43	2.24	28.63	0.00	Peak	100	88	HORIZONTAL
3	2483.98	73.34	74.00	-0.66	42.41	2.26	28.67	0.00	Peak	100	88	HORIZONTAL
4	2484.94	53.84	54.00	-0.16	22.91	2.26	28.67	0.00	Average	100	88	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For EUT 1:


For Emission not in Restricted Band

Plot on Configuration IEEE 802.11n MCS0 HT20 / Reference Level

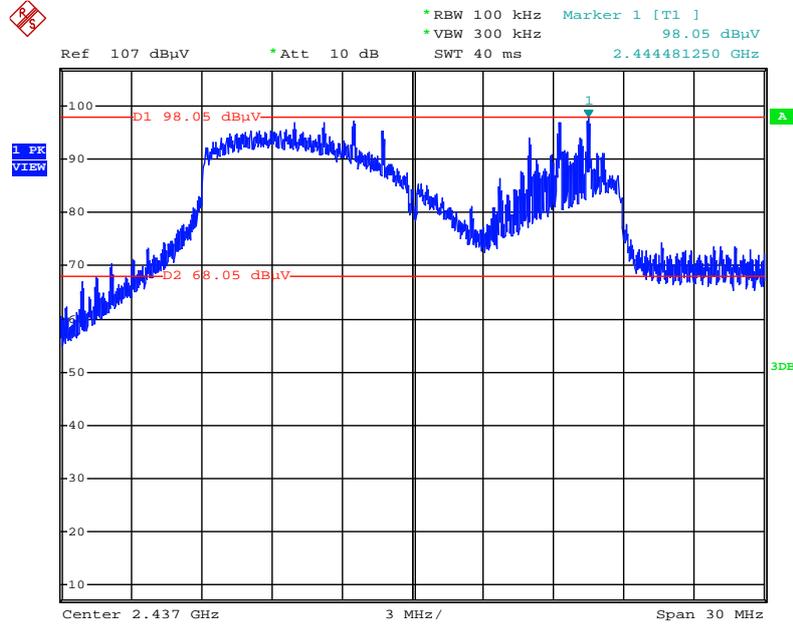


Date: 12.JUN.2014 00:53:52

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

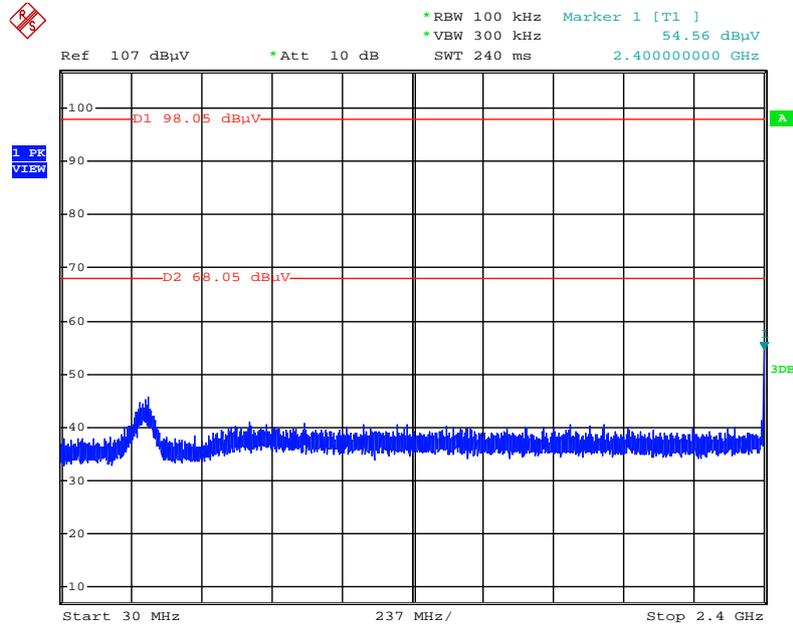


Date: 12.JUN.2014 00:54:52

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 2500MHz~26500MHz (down 30dBc)

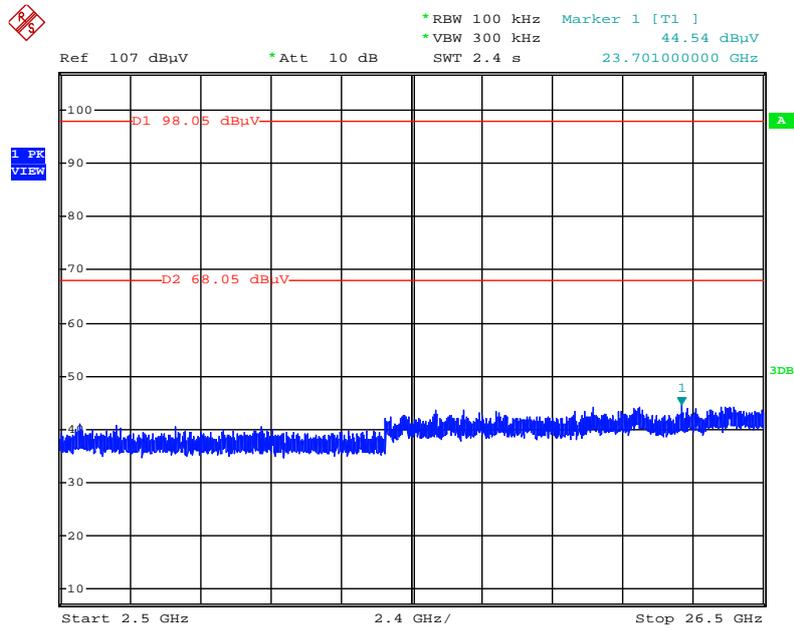


Date: 12.JUN.2014 00:55:33

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

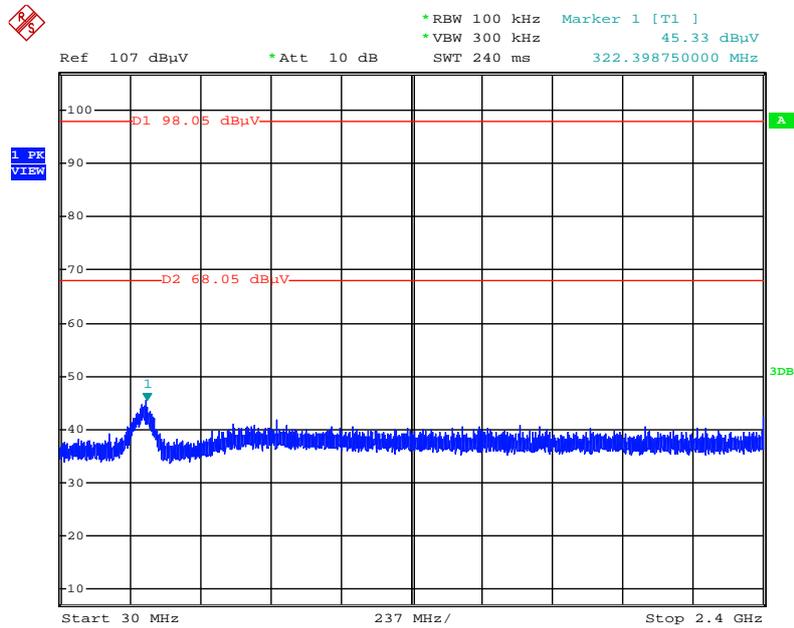


Date: 12.JUN.2014 00:56:37

Plot on Configuration IEEE 802.11n MCS0 HT40 / Reference Level

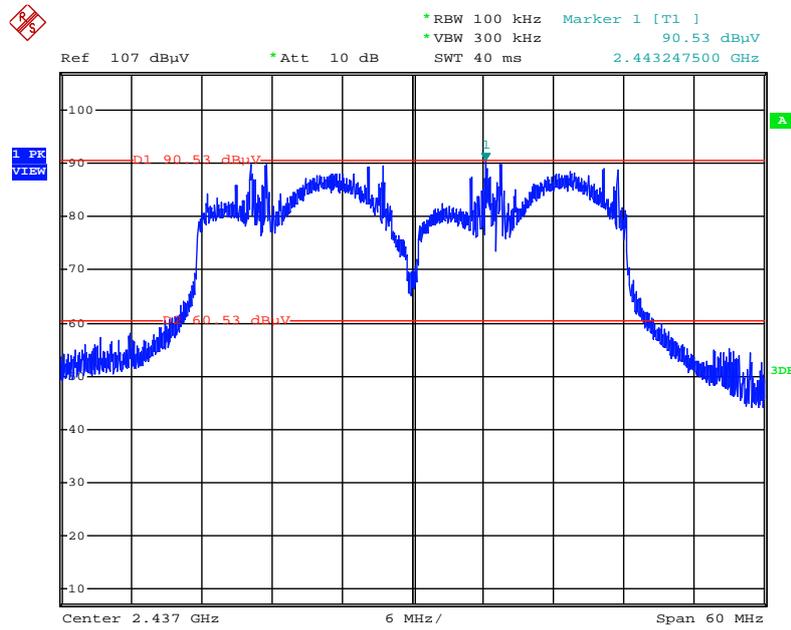


Date: 12.JUN.2014 01:00:04

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

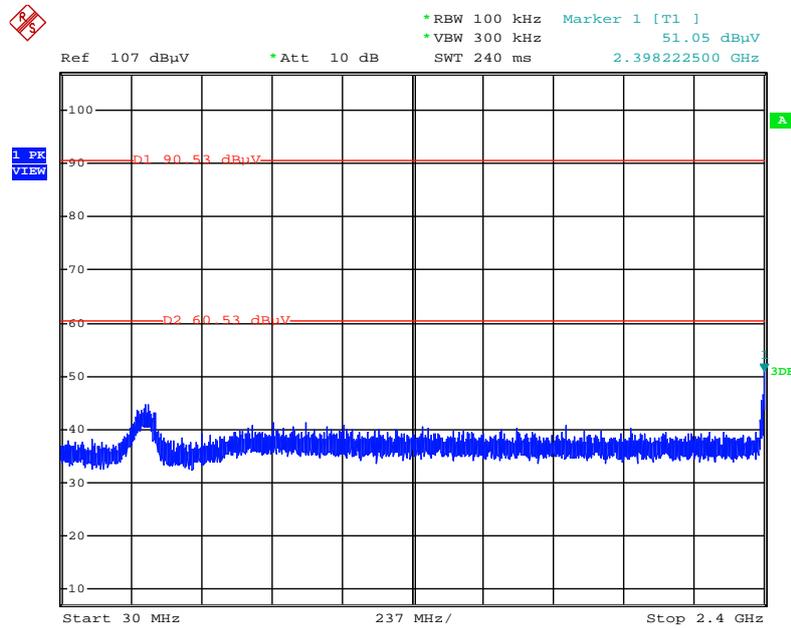


Date: 12.JUN.2014 01:01:39

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 2500MHz~26500MHz (down 30dBc)

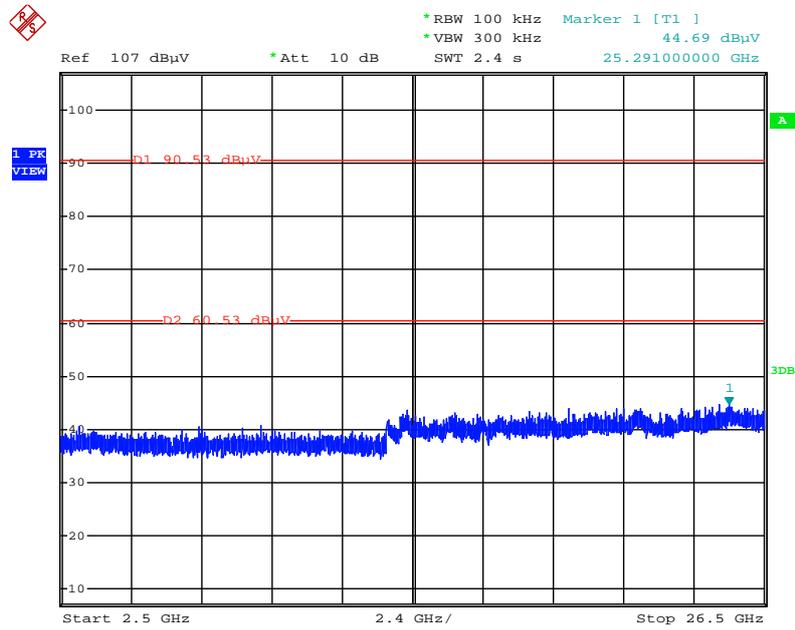


Date: 12.JUN.2014 01:02:13

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

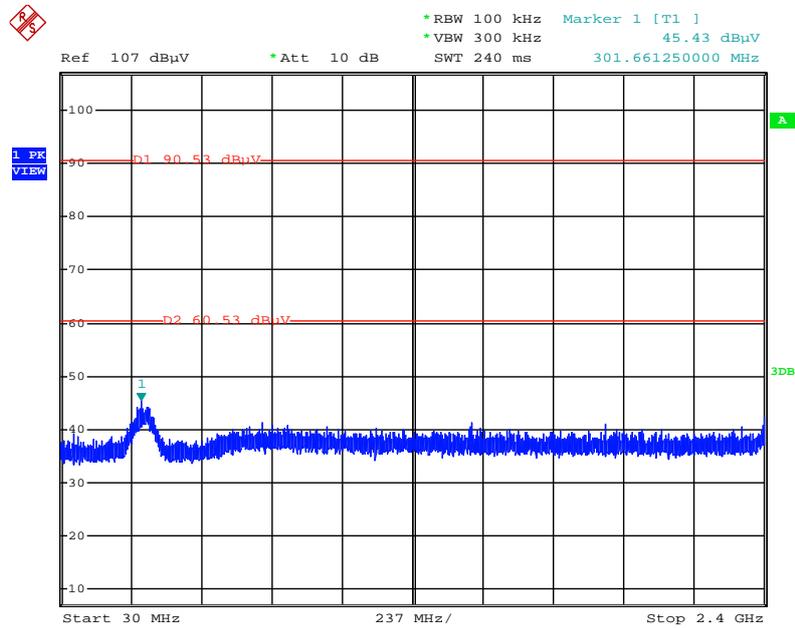


Date: 12.JUN.2014 01:02:59

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 2500MHz~26500MHz (down 30dBc)

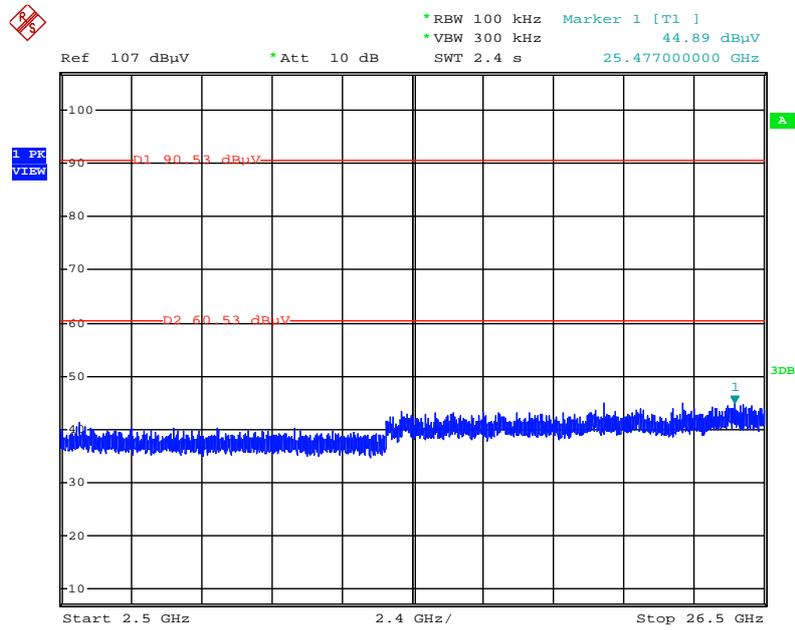


Date: 12.JUN.2014 01:03:41

Plot on Configuration IEEE 802.11b / Reference Level

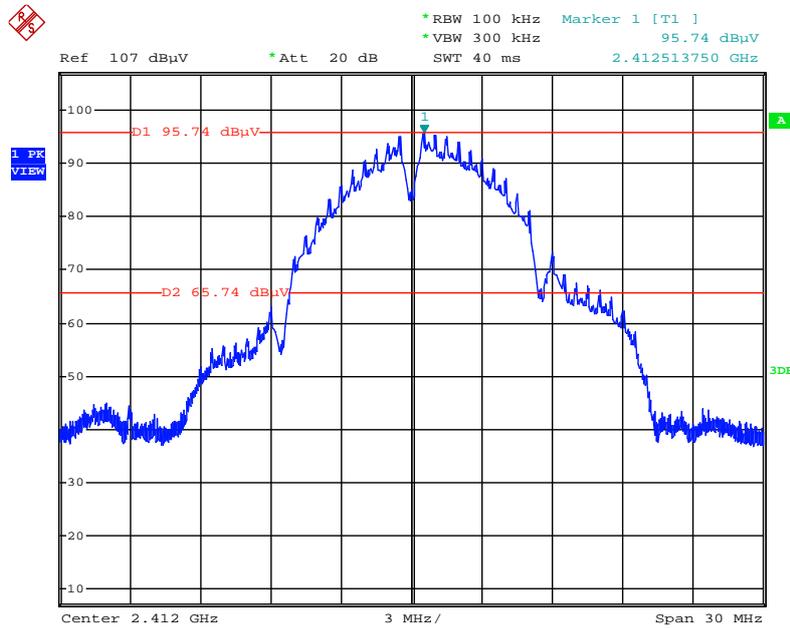


Date: 12.JUN.2014 00:26:49

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

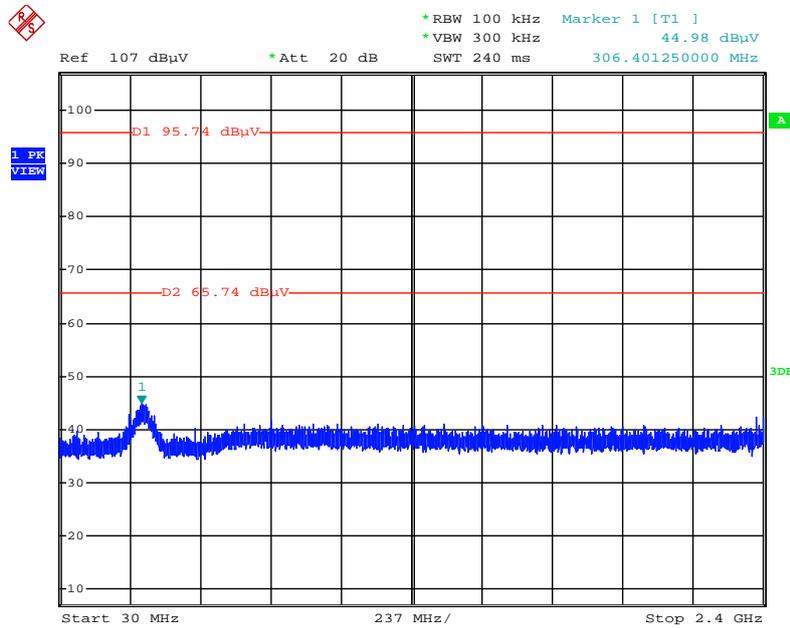


Date: 12.JUN.2014 00:27:28

Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc)

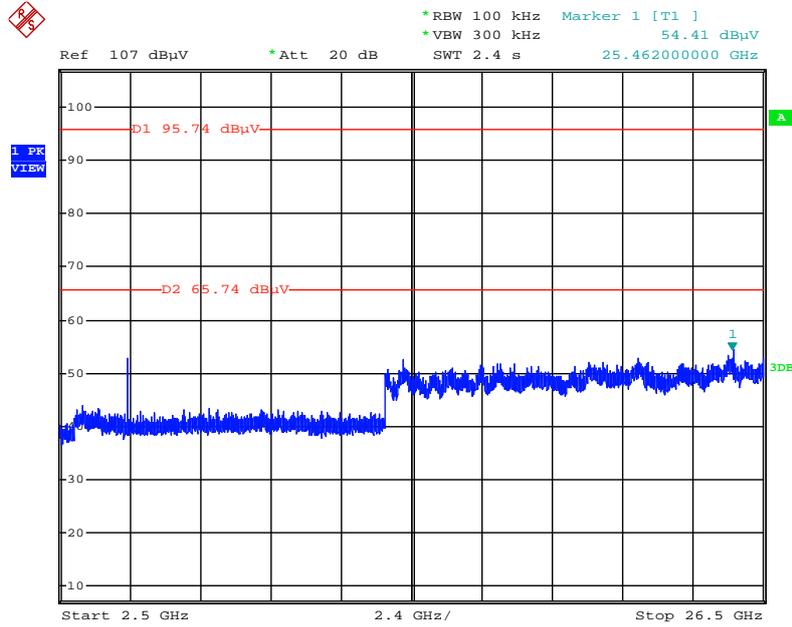


Date: 12.JUN.2014 00:28:18

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

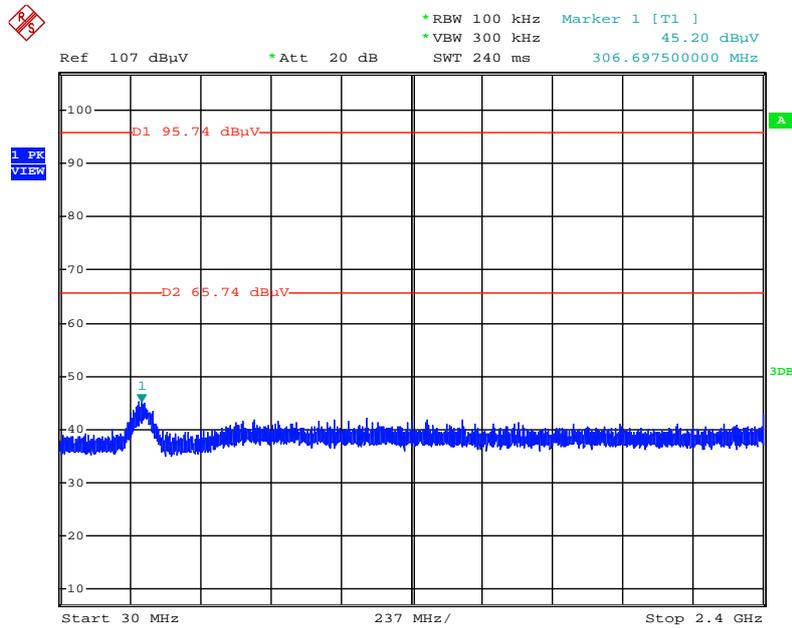


Date: 12.JUN.2014 00:29:39

Plot on Configuration IEEE 802.11g / Reference Level

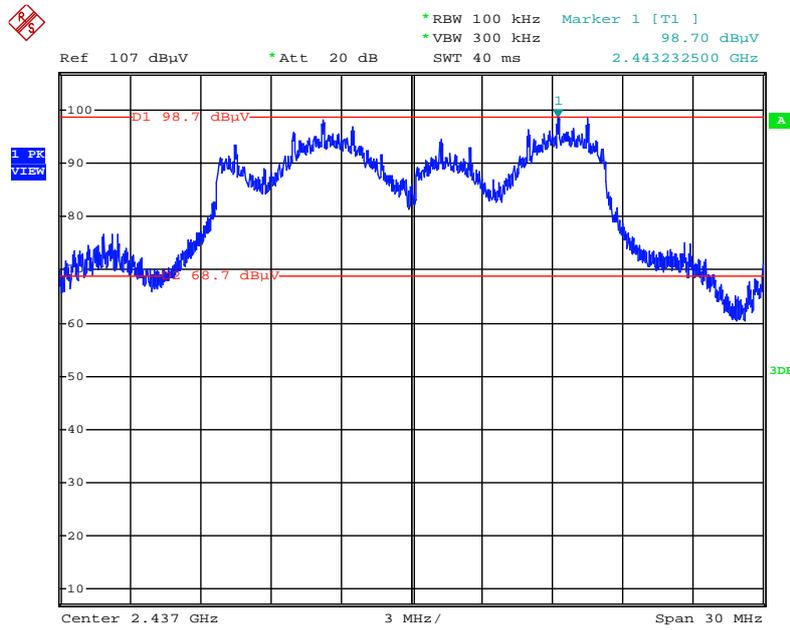


Date: 12.JUN.2014 00:34:20

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

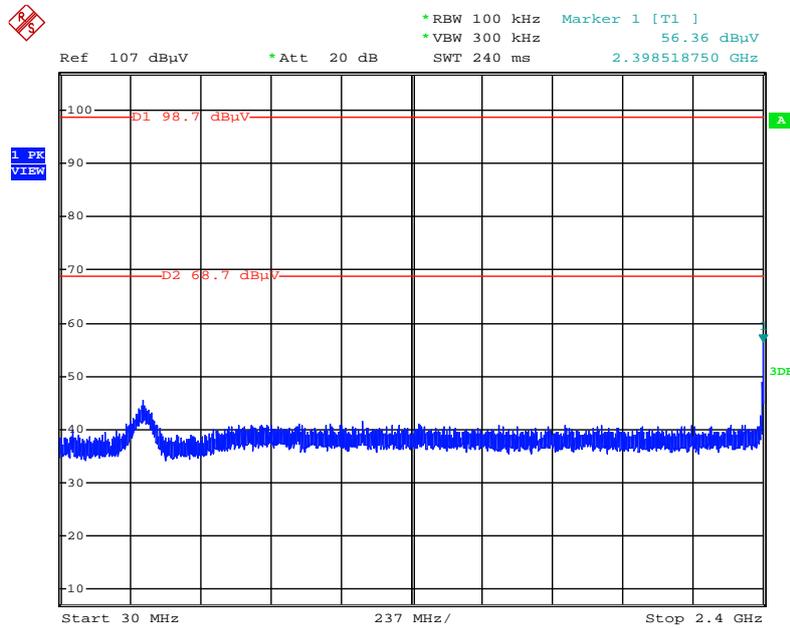


Date: 12.JUN.2014 00:35:11

Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc)

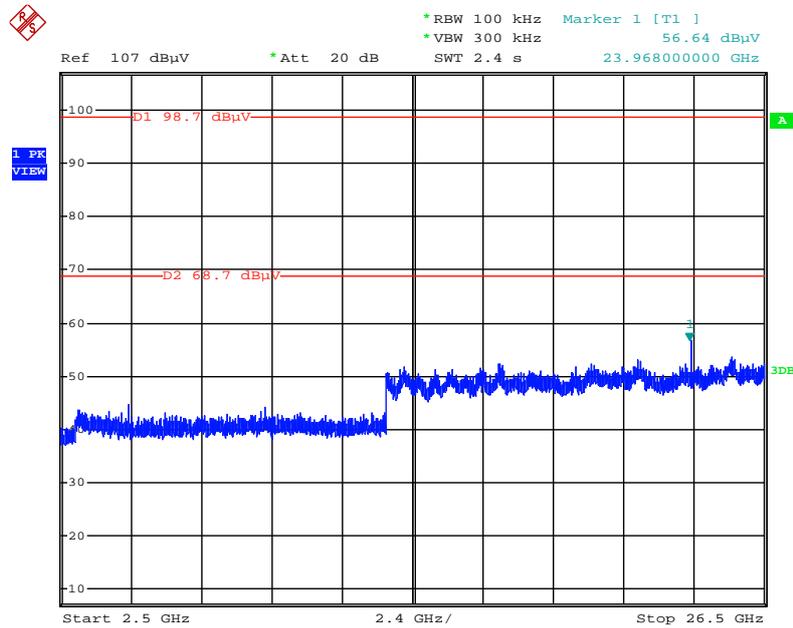


Date: 12.JUN.2014 00:46:49

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

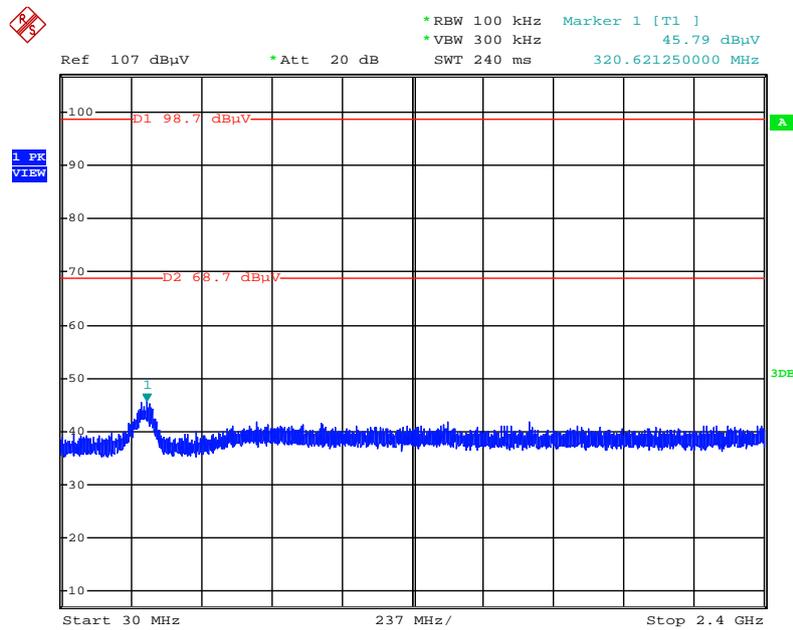

Date: 12.JUN.2014 00:48:57

Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)

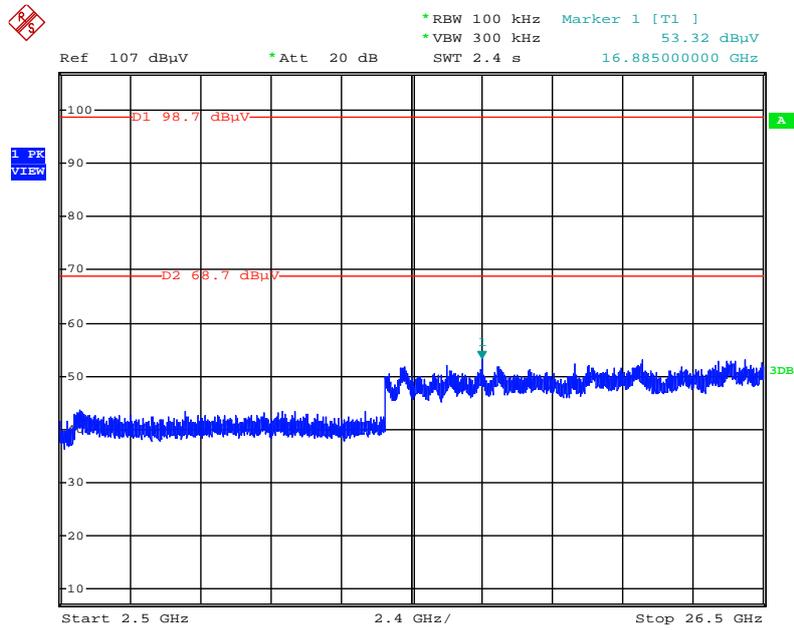


Date: 12.JUN.2014 00:49:48

For EUT 2:


For Emission not in Restricted Band

Plot on Configuration IEEE 802.11n MCS0 HT20 / Reference Level

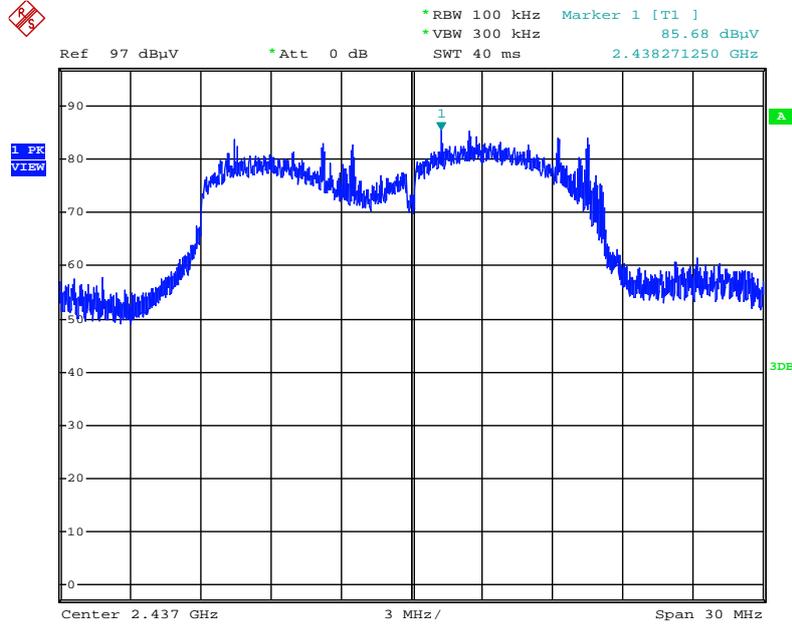


Date: 1.AUG.2014 20:46:43

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

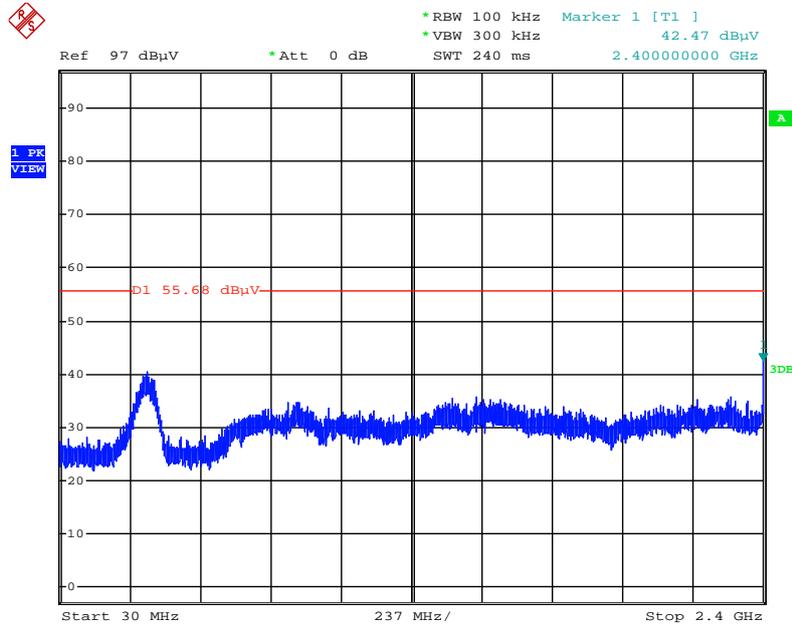


Date: 1.AUG.2014 20:47:50

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 2500MHz~26500MHz (down 30dBc)

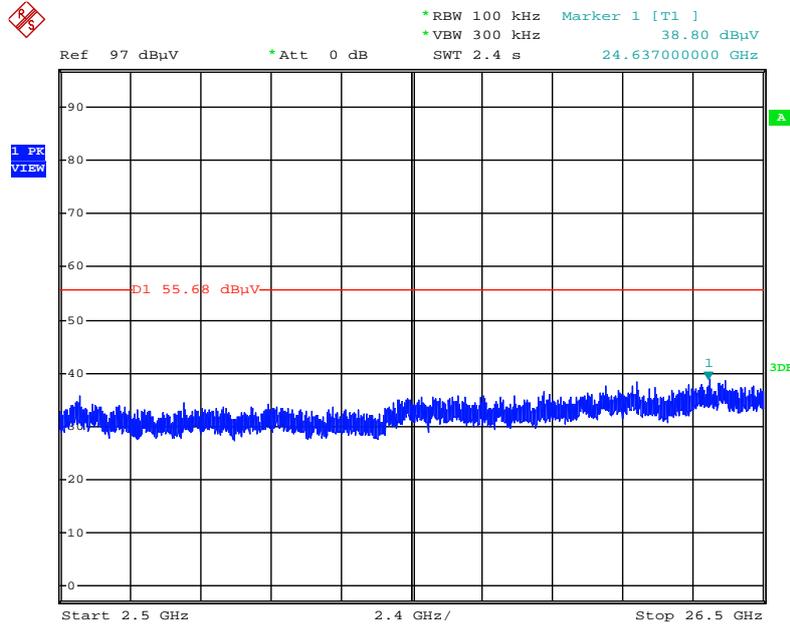


Date: 1.AUG.2014 20:48:27

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

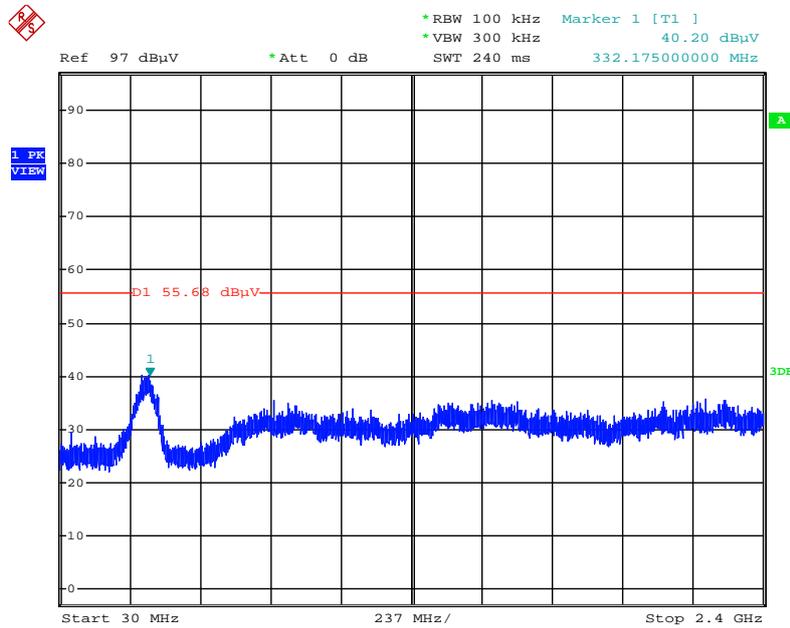


Date: 1.AUG.2014 20:49:27

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)

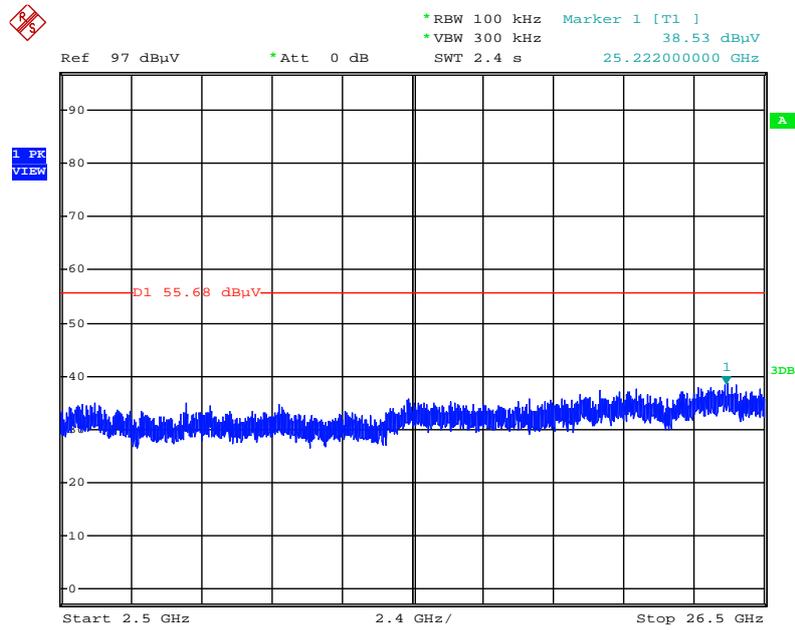


Date: 1.AUG.2014 20:49:04

Plot on Configuration IEEE 802.11n MCS0 HT40 / Reference Level

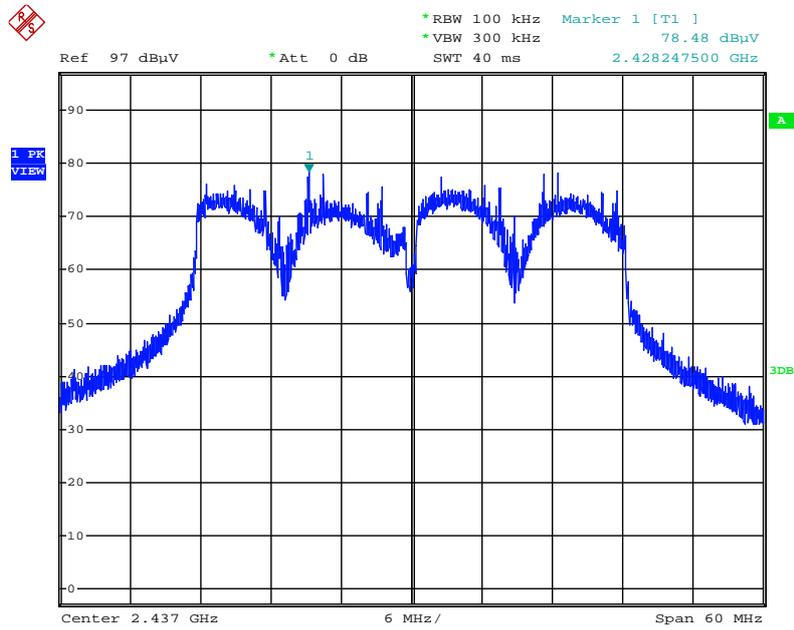


Date: 1.AUG.2014 20:50:32

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

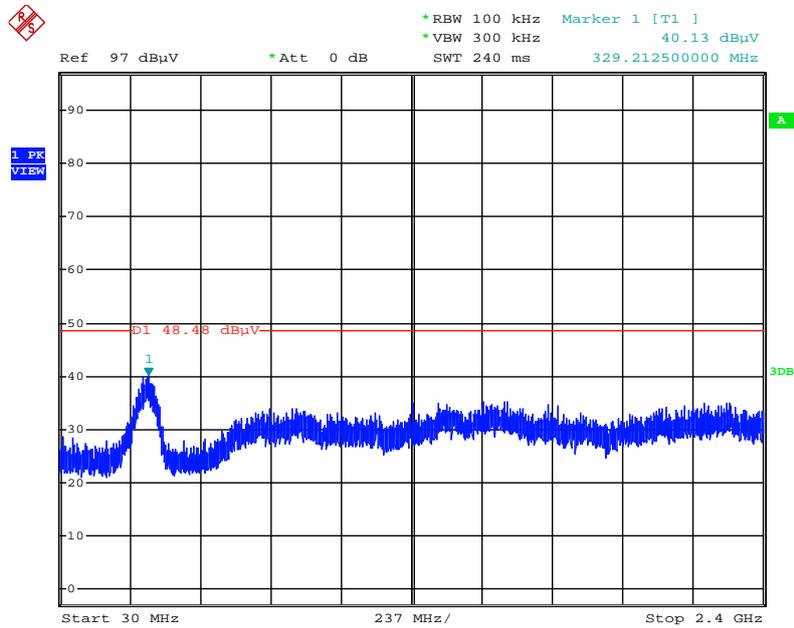


Date: 1.AUG.2014 20:51:27

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 2500MHz~26500MHz (down 30dBc)

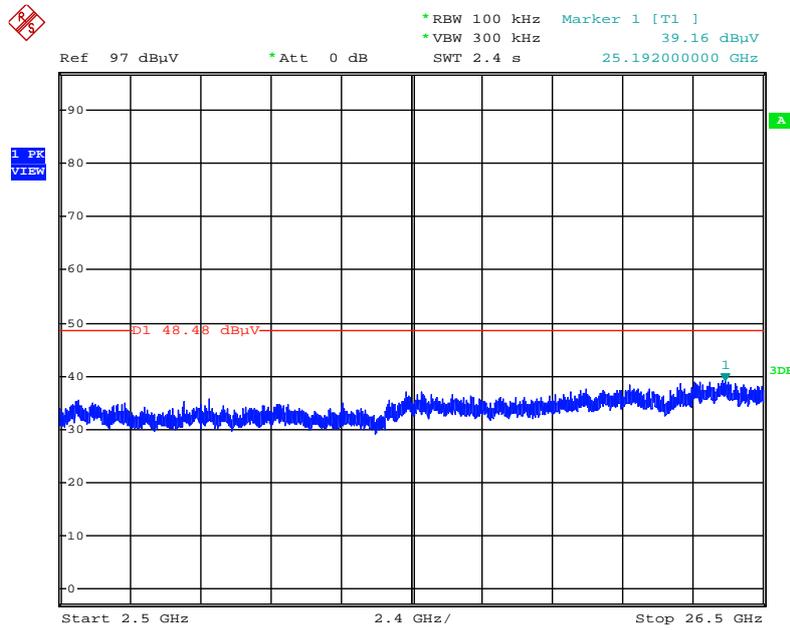


Date: 1.AUG.2014 20:53:25

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

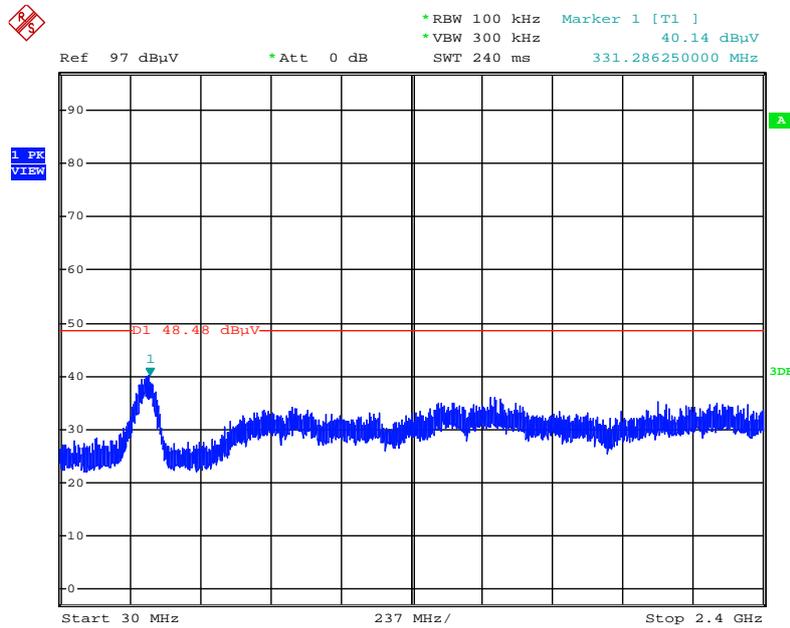


Date: 1.AUG.2014 20:54:14

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 2500MHz~26500MHz (down 30dBc)

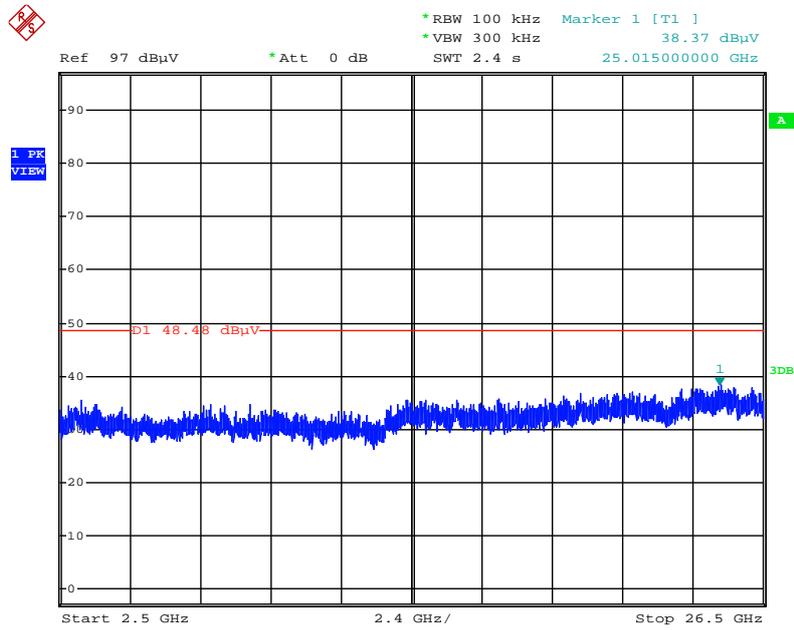


Date: 1.AUG.2014 20:53:58

Plot on Configuration IEEE 802.11b / Reference Level

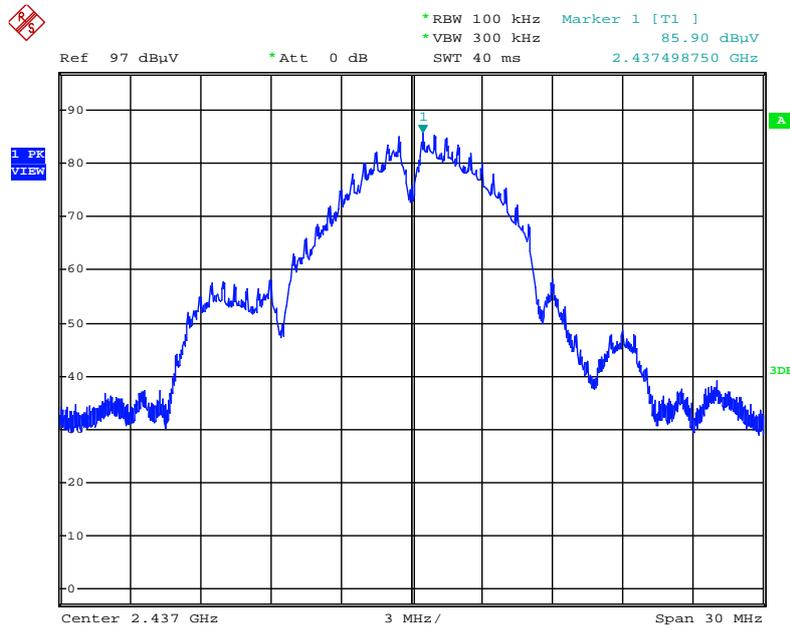


Date: 1.AUG.2014 20:37:08

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

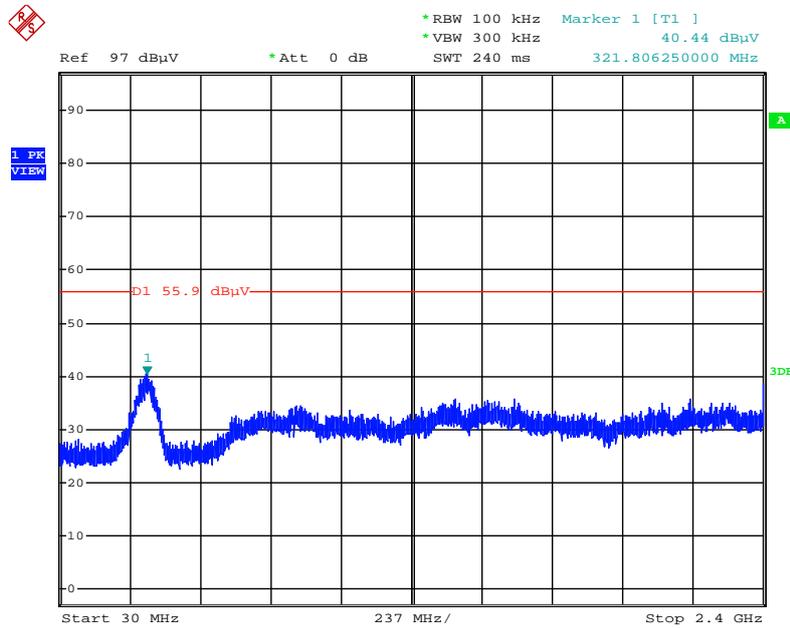


Date: 1.AUG.2014 20:38:15

Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc)

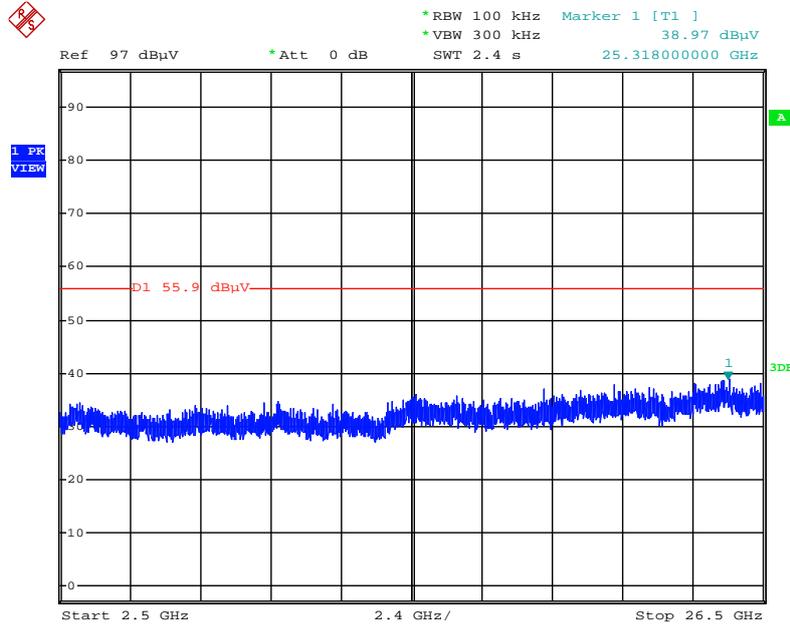


Date: 1.AUG.2014 20:38:56

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

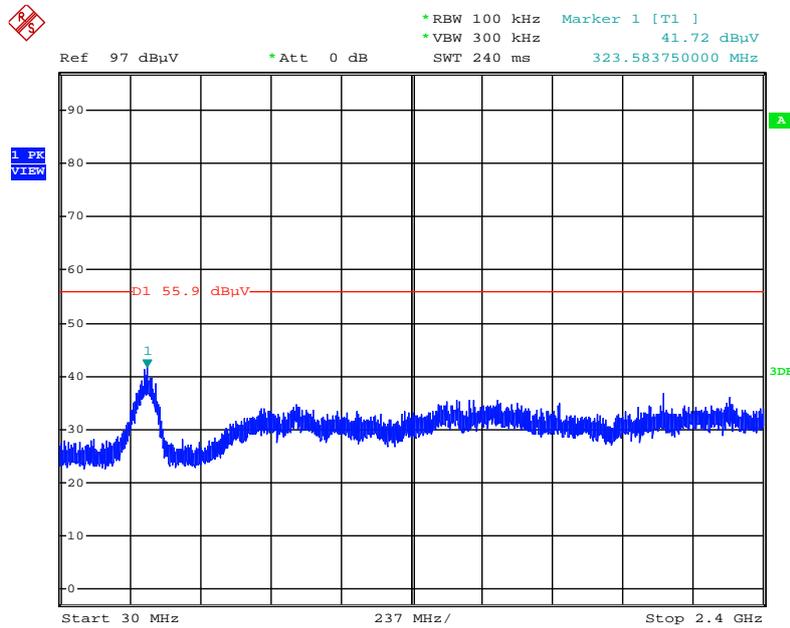


Date: 1.AUG.2014 20:40:04

Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)

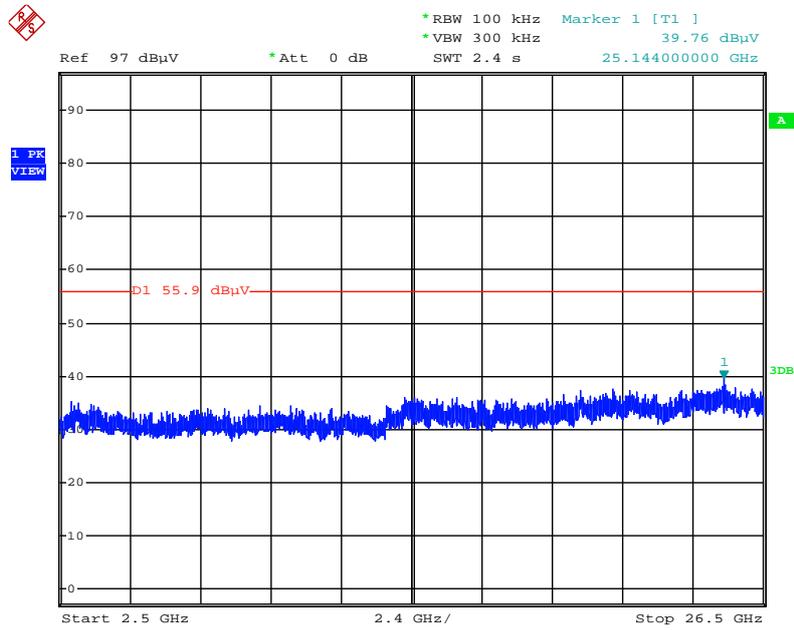


Date: 1.AUG.2014 20:39:40

Plot on Configuration IEEE 802.11g / Reference Level

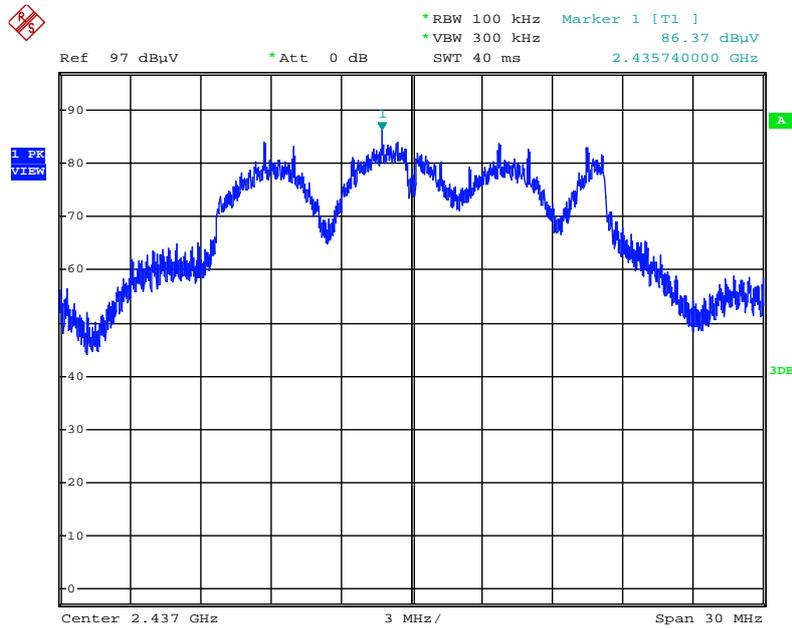


Date: 1.AUG.2014 20:41:06

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

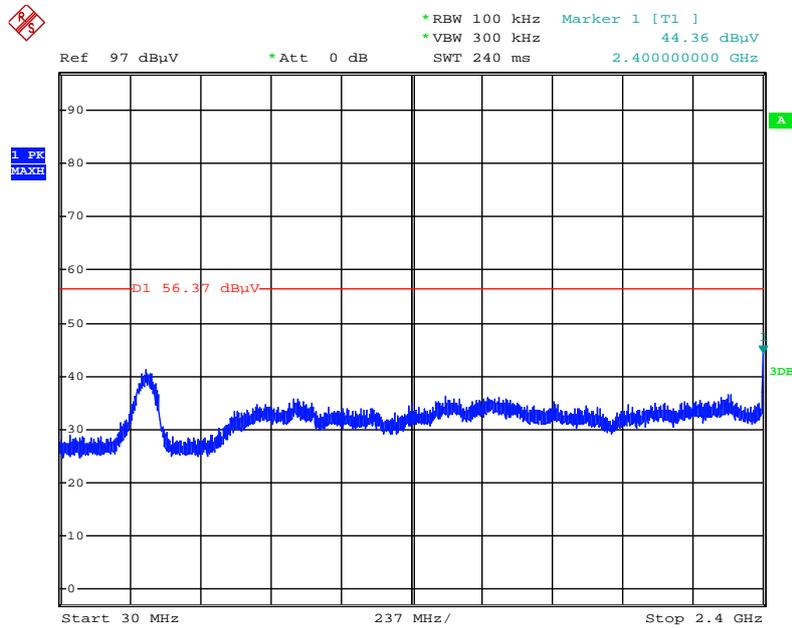


Date: 1.AUG.2014 20:44:16

Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc)

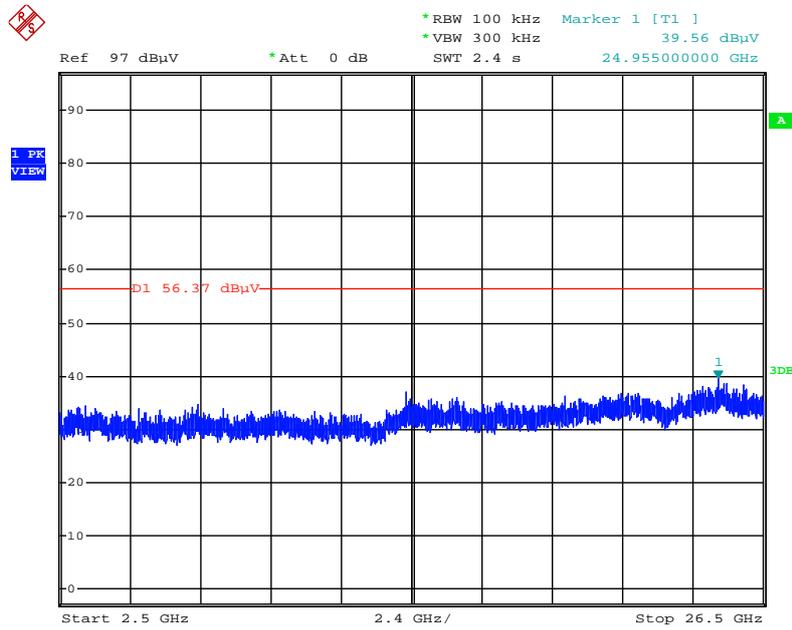


Date: 1.AUG.2014 20:44:37

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

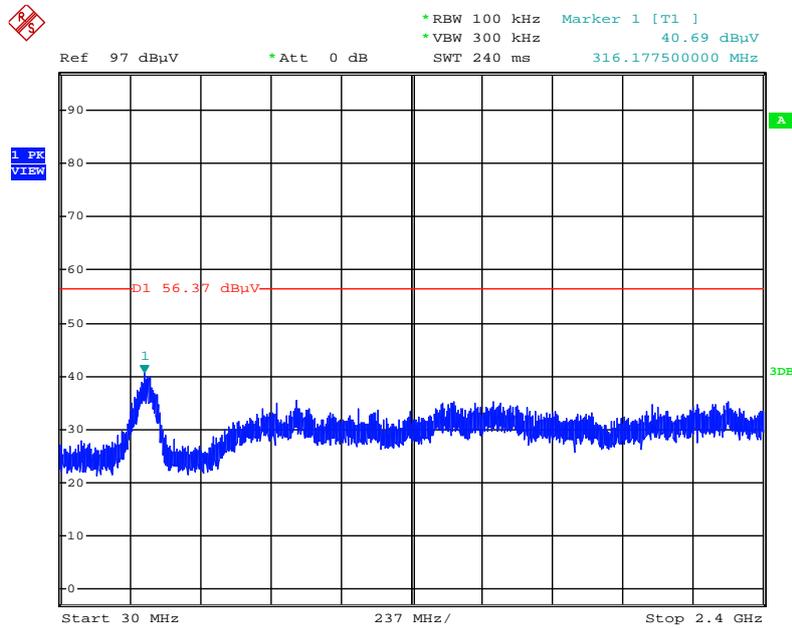

Date: 1.AUG.2014 20:45:47

Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)

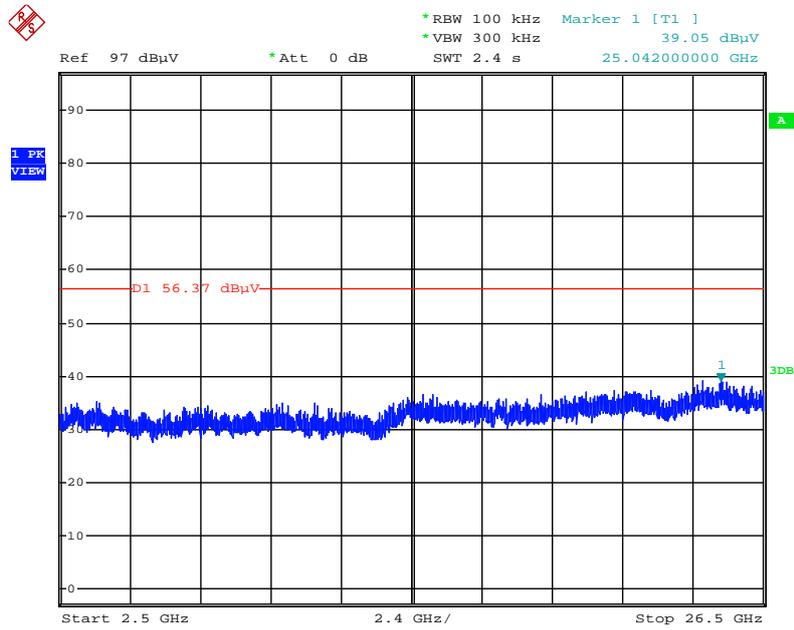

Date: 1.AUG.2014 20:45:30

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9 kHz ~ 2.75 GHz	Apr. 23, 2014	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150 kHz ~ 100 MHz	Nov. 23, 2013	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Nov. 11, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150 kHz ~ 30 MHz	Dec. 04, 2013	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112B	2928	30MHz ~ 2GHz	Dec. 27, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 01, 2013	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Dec. 17, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 12, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Oct. 23, 2013	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100019	9kHz~40GHz	Dec. 02, 2013	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Dec. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Nov. 29, 2013	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 03, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz - 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz - 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz - 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz - 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz - 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%