

Regulatory WLAN Antenna Information

(TB Mode)

Platform information										
Brand	ODM	RMN	Intel platform (ex: Yes, No or NA)	Platform type (ex: regular NB, convertible PC, AIO...etc)	*SAR minimum separation (mm)					
HP Inc.	Inventec	HSN-I54C	No	Convertible PC	4.75					
*****Please fill in exact product model name and make sure the model name is visible on product cover or any parts for end users recognize for authority inspection.										
Antenna information										
Vendor	Type	Antenna Part number (Main/Tx2)	Antenna Part number (Aux/Tx1)							
WNC	PIFA	6036B0319901 (81EABL15.G65)	6036B0319801 (81EABL15.G64)							
Peak gain w/ cable loss (dBi)*										
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
Main	-1.56	-0.67	-0.21	1.21	1.21	-0.10	0.94	1.12	1.12	0.83
Aux	-2.48	-1.56	-0.42	0.24	-0.16	-0.16	-0.83	-1.13	0.37	0.37
Module Information										
Model	Form factor and suffixes									
QCNFA765	WLAN Qualcomm Martini WCN6856 Wi-Fi 6e +BT 5.2 M.2 2230 160MHz PCI-e+USB WW									
Antenna vendor connect person										
Antenna Vendor	WNC									
contact person	Annie Lo									
E-mail	annie.lo@wnc.com.tw									
Tel/Mobile	886-3-666-7799 ext: 3415									
Web address	https://www.wnc.com.tw									
Address	20 Park Avenue II, Hsinchu Science Park Hsinchu 300, Taiwan									

Antenna Information

Section 1. Antenna Assembly Specifications


1A Antenna Part Number	1B Manufacturer	1C Antenna Type	1D Cable Assembly Part Number and Information	1E Freq Range MHz	1F * Peak Gain W/ Cable loss (dBi)	1G Peak Gain w/o Cable Loss (dBi)	1H Max VSWR	1I Cable Loss (dB)
P/N: 81EABL15.G65 Main Antenna (TX2)	WNC	PIFA	Connector: IPEX 20565-001R-13 50 ohm Coaxial length: 355 mm diameter: 1.13 mm	2400-2495	-1.56	-0.57	3.0	0.99
				5150-5250	-0.67	0.80	3.0	1.47
				5250-5350	-0.21	1.26	3.0	1.47
				5470-5725	1.21	2.72	3.0	1.51
				5725-5850	1.21	2.75	3.0	1.54
				5850-5895	-0.10	1.46	3.0	1.56
				5925-6425	0.94	2.53	3.0	1.59
				6425-6525	1.12	2.76	3.0	1.64
				6525-6875	1.12	2.80	3.0	1.68
				6875-7125	0.83	2.56	3.0	1.73
P/N: 81EABL15.G64 Aux Antenna (TX1)	WNC	PIFA	Connector: IPEX 20565-001R-13 50 ohm Coaxial length: 560 mm diameter: 1.13 mm	2400-2495	-2.48	0.13	3.0	2.61
				5150-5250	-1.56	0.76	3.0	2.32
				5250-5350	-0.42	1.90	3.0	2.32
				5470-5725	0.24	2.63	3.0	2.39
				5725-5850	-0.16	2.26	3.0	2.42
				5850-5895	-0.16	2.28	3.0	2.44
				5925-6425	-0.83	1.68	3.0	2.51
				6425-6525	-1.13	1.46	3.0	2.59
				6525-6875	0.37	3.02	3.0	2.65
				6875-7125	0.37	3.10	3.0	2.73

Section 3. Radiation characteristics of antenna loaded in Host Platform

Main Antenna


Max Antenna 2D Radiation Pattern 2400 – 2495 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
2400-2495	-1.56

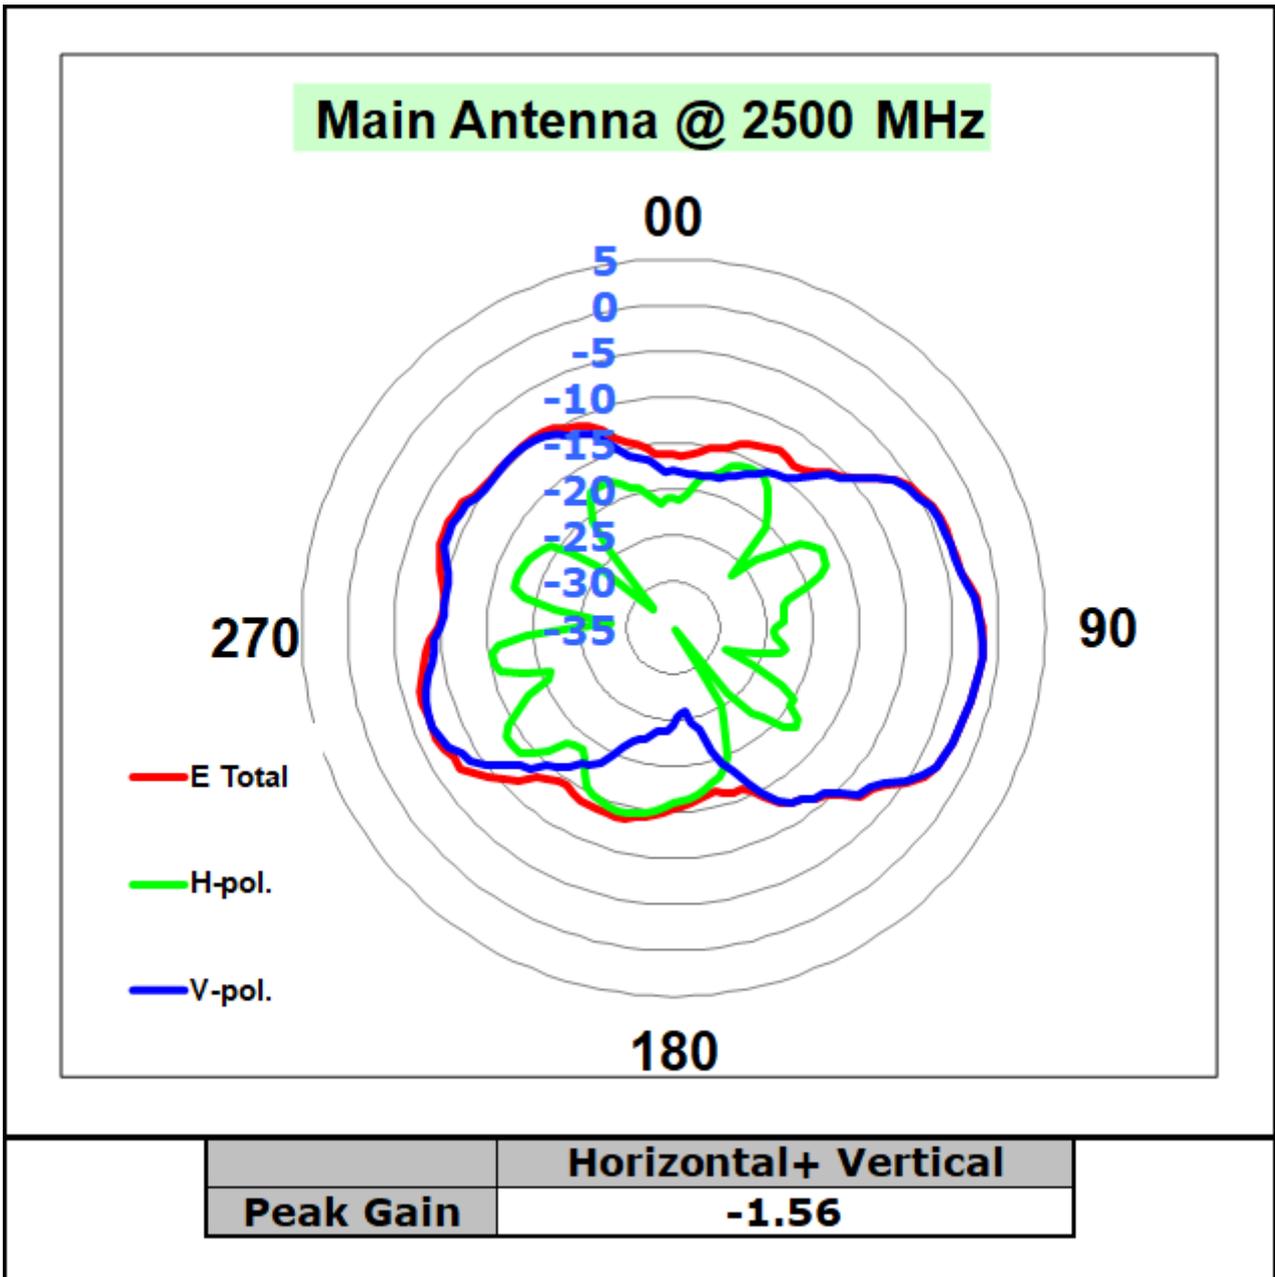


Max Antenna 2D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5250-5350	-0.21

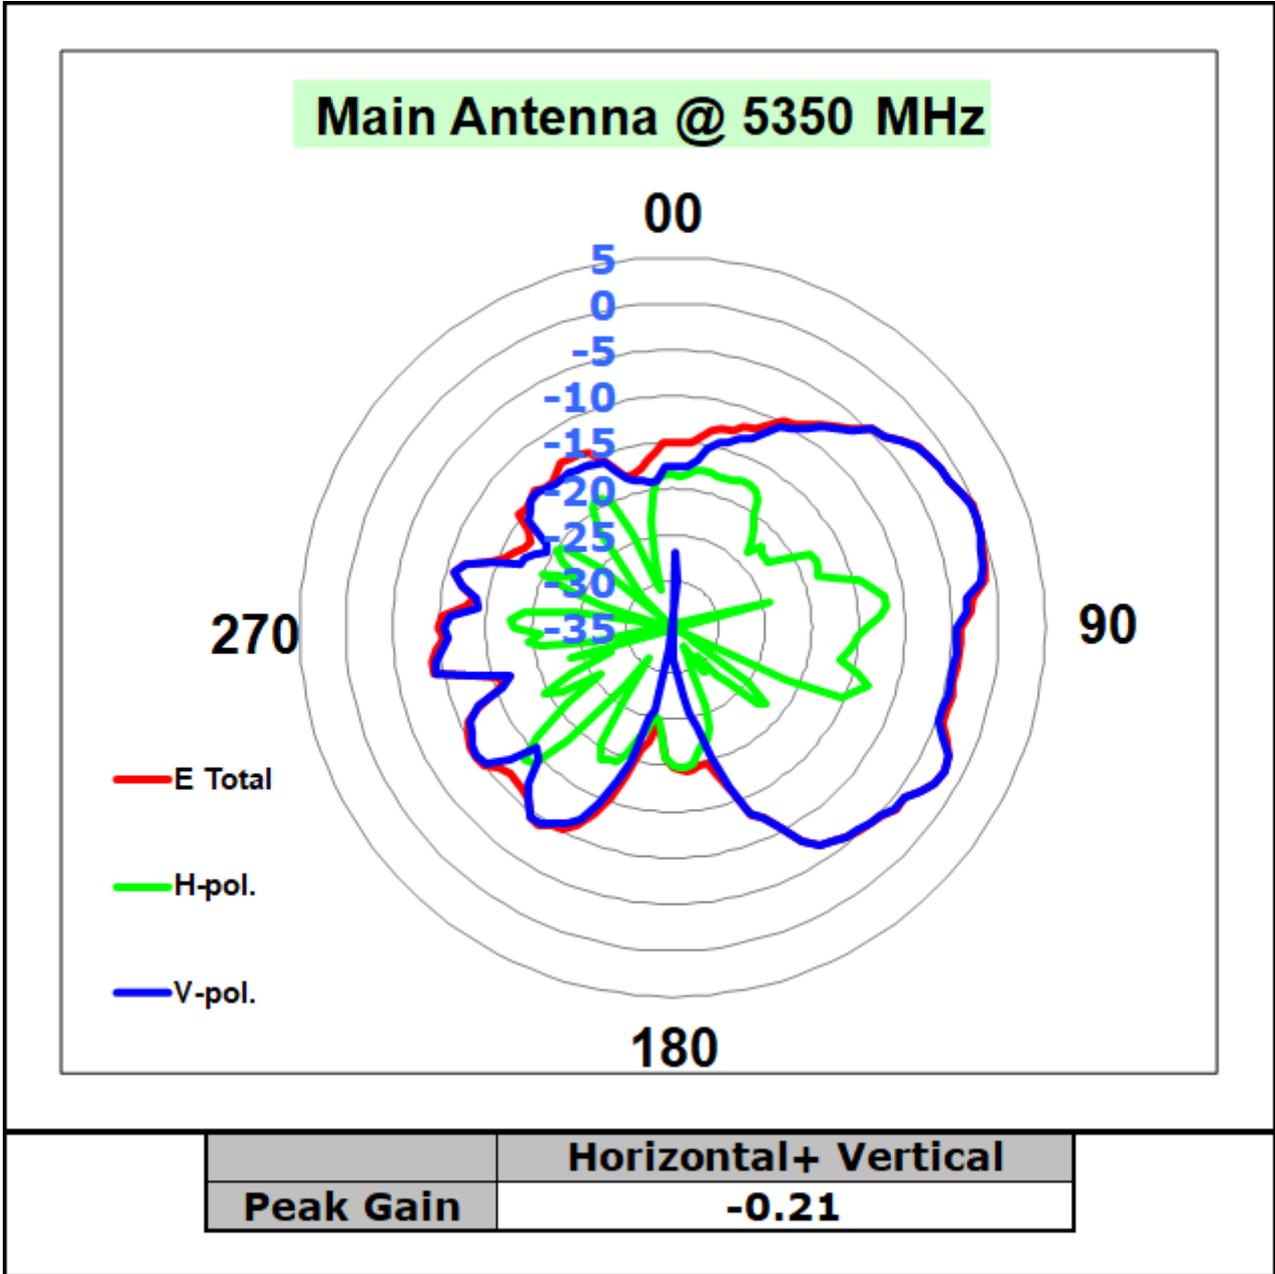


Max Antenna 2D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5470-5725	1.21

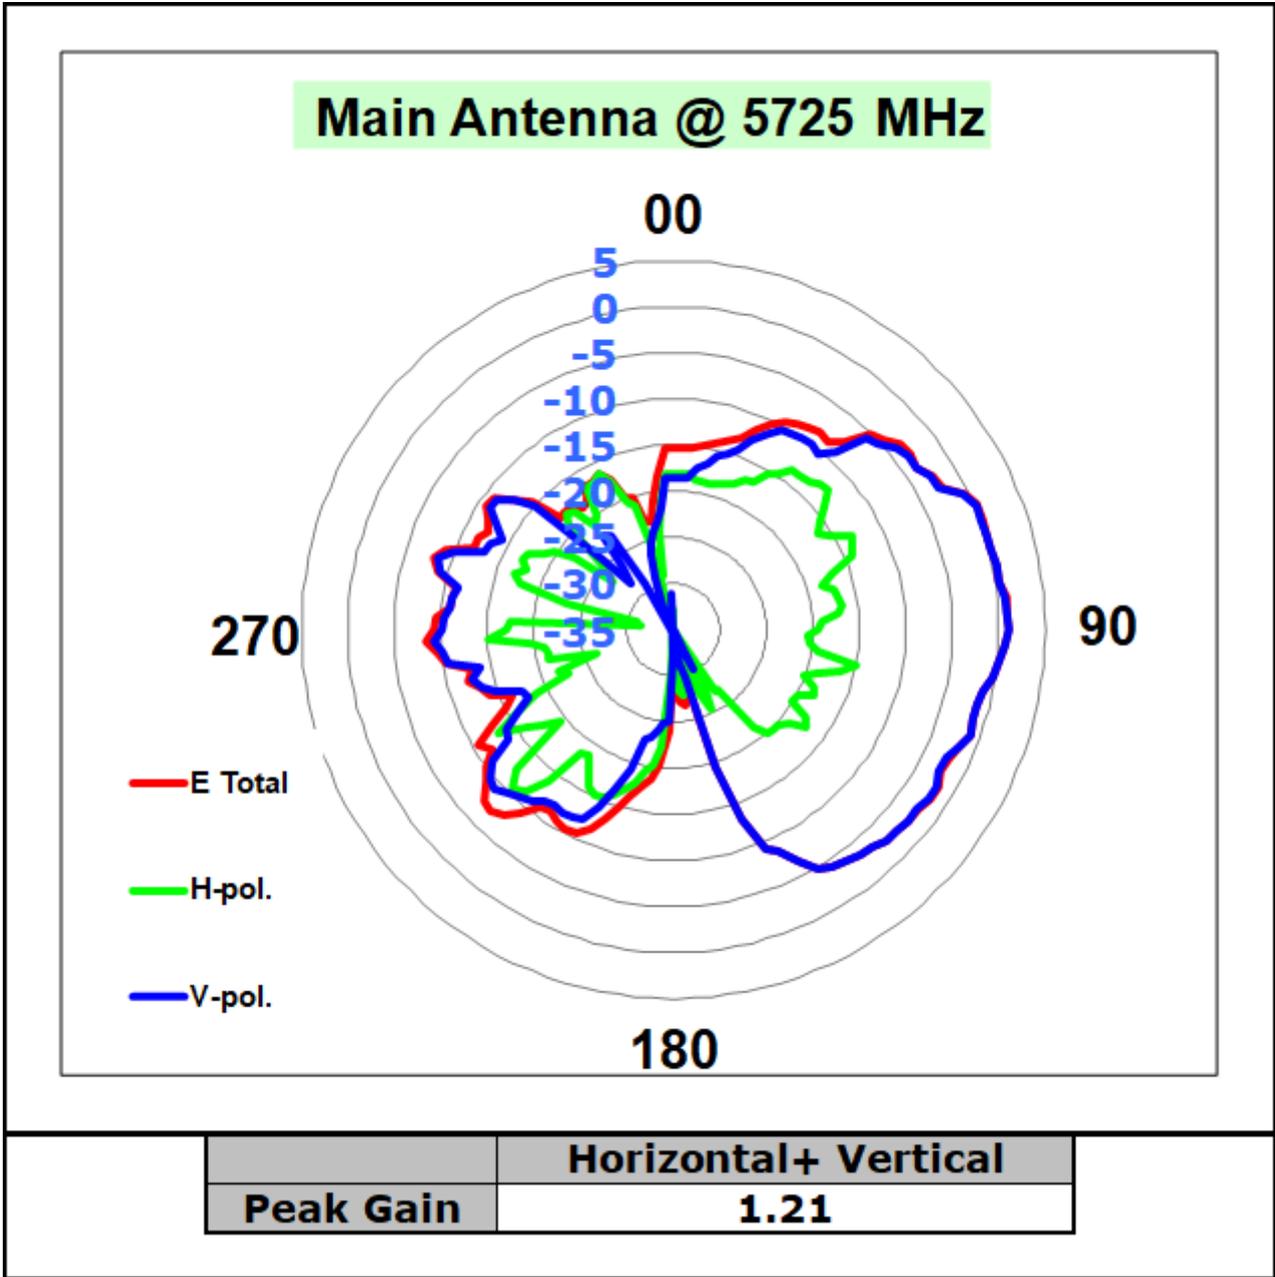


Max Antenna 2D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5725-5850	1.21

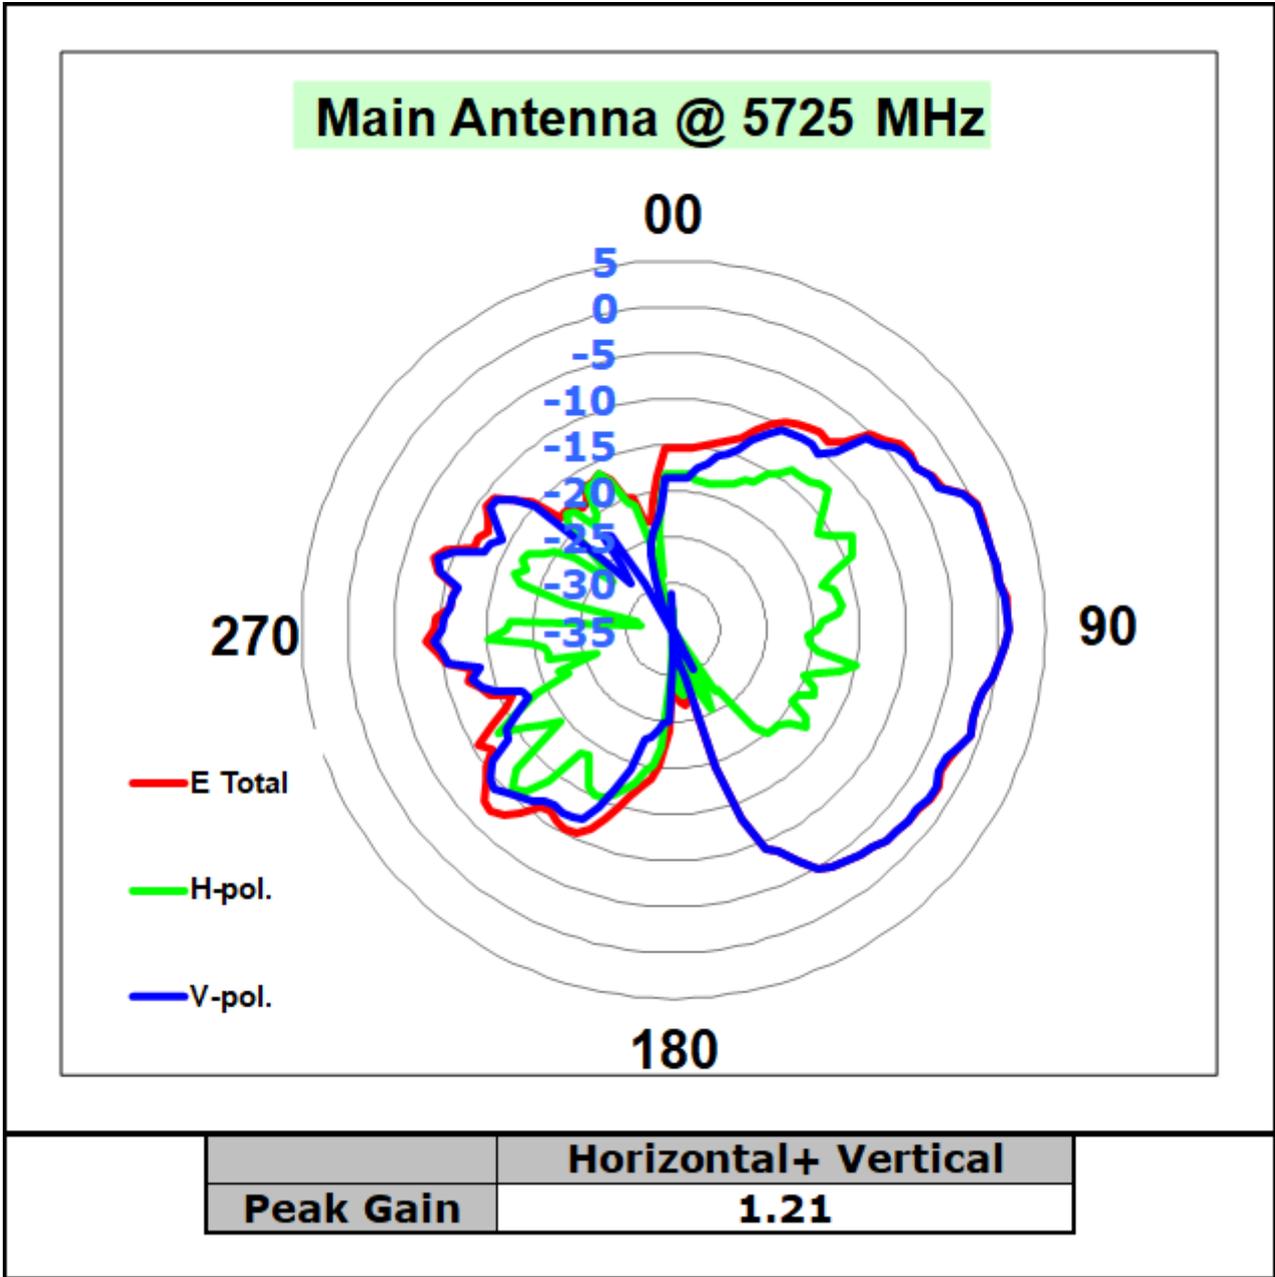


Max Antenna 2D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5850-5895	-0.10

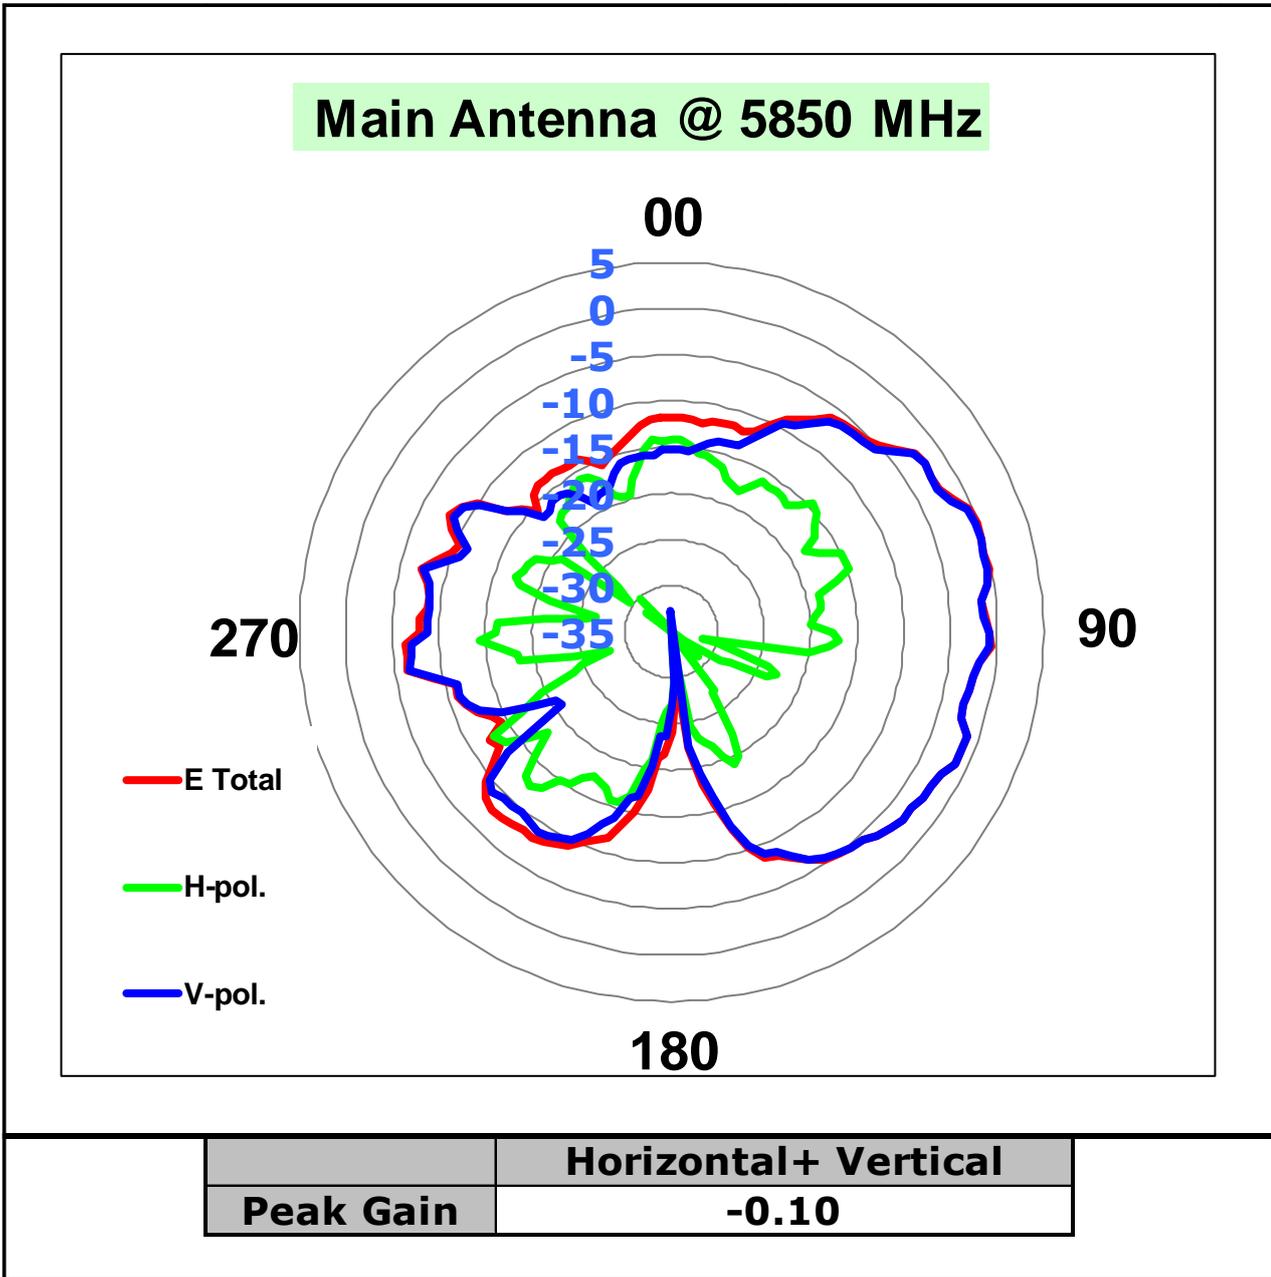


Max Antenna 2D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5925-6425	0.94

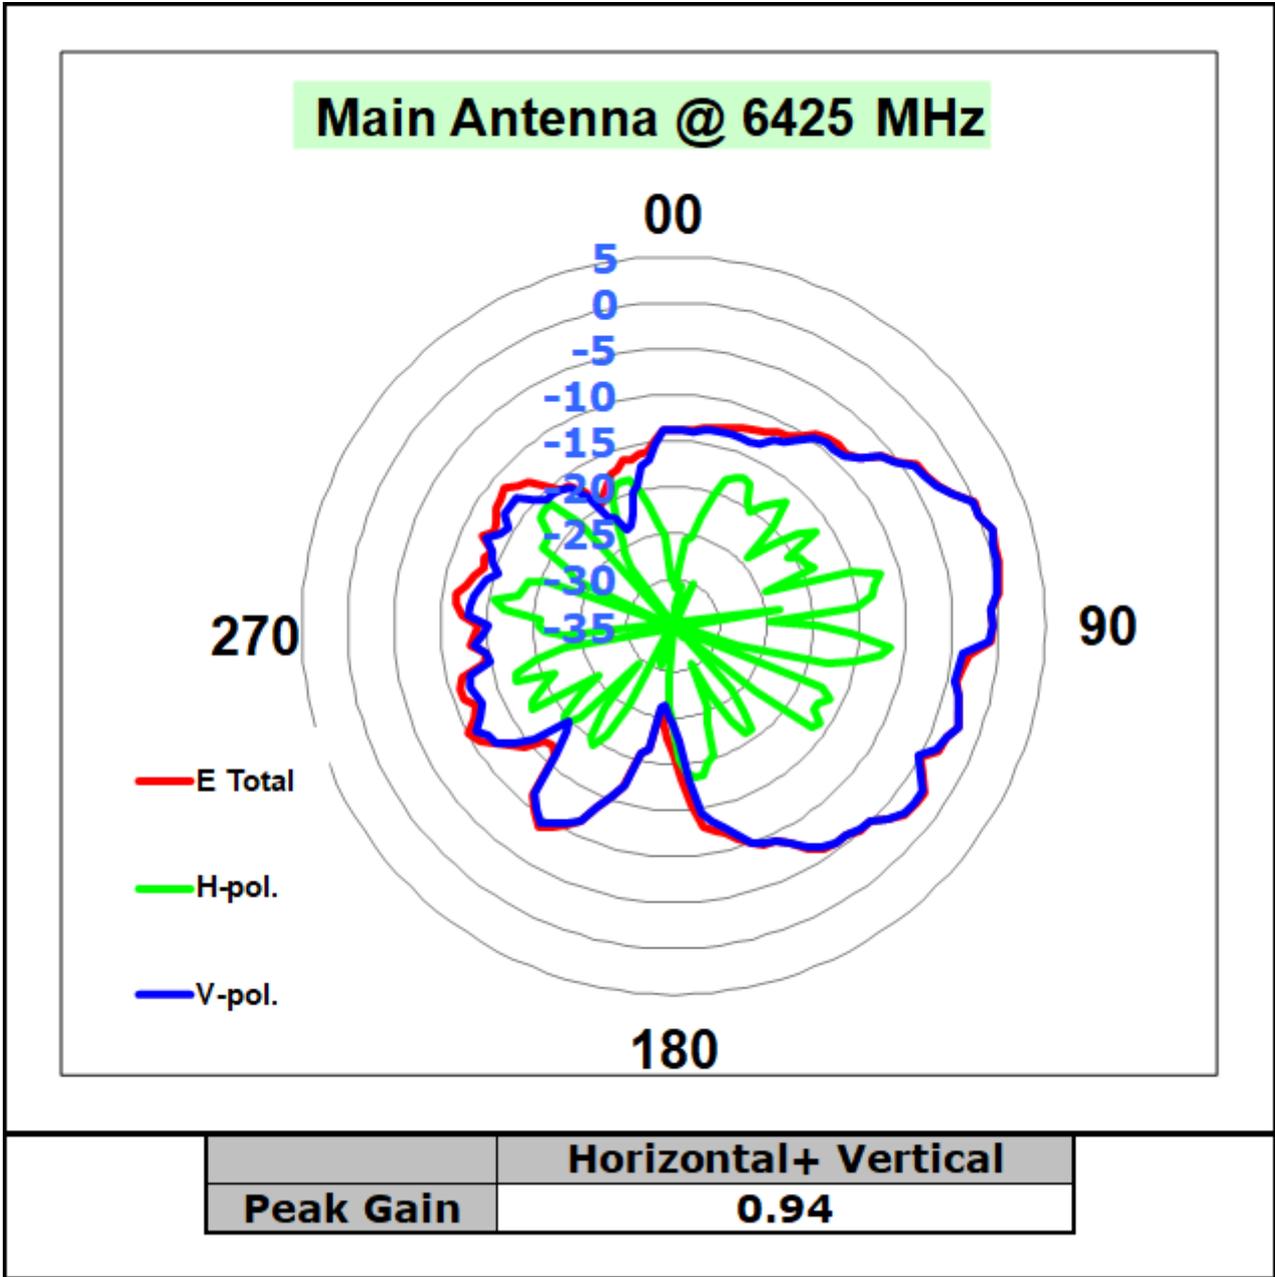


Max Antenna 2D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6425-6525	1.12

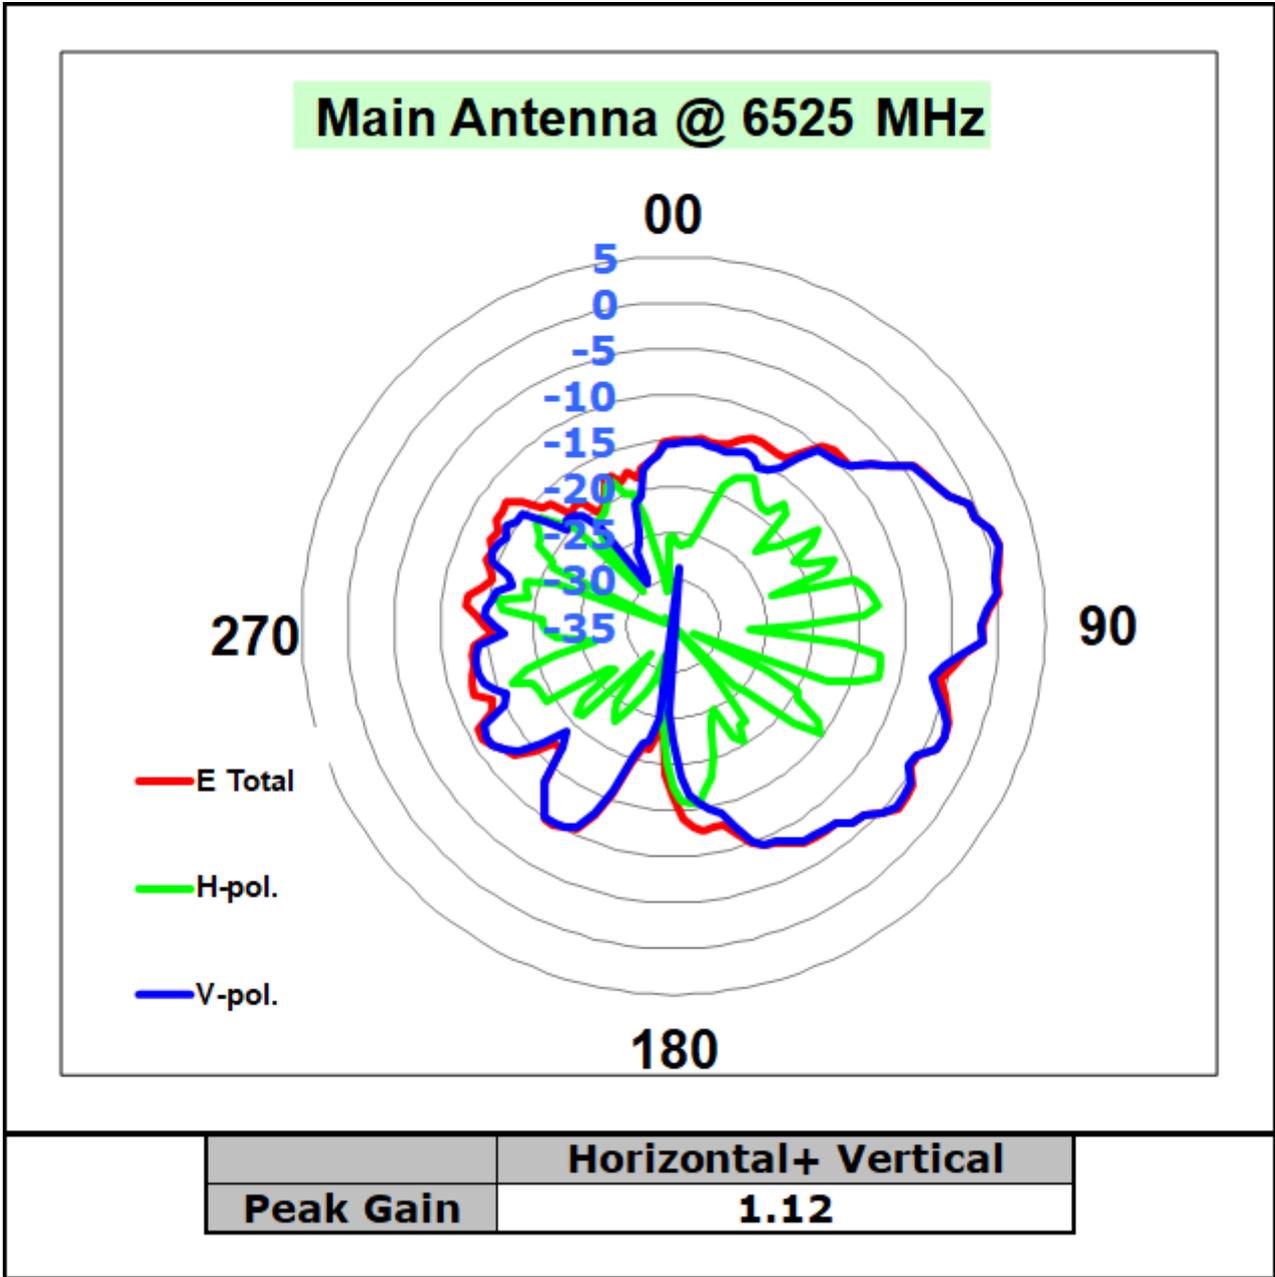


Max Antenna 2D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6525-6875	1.12

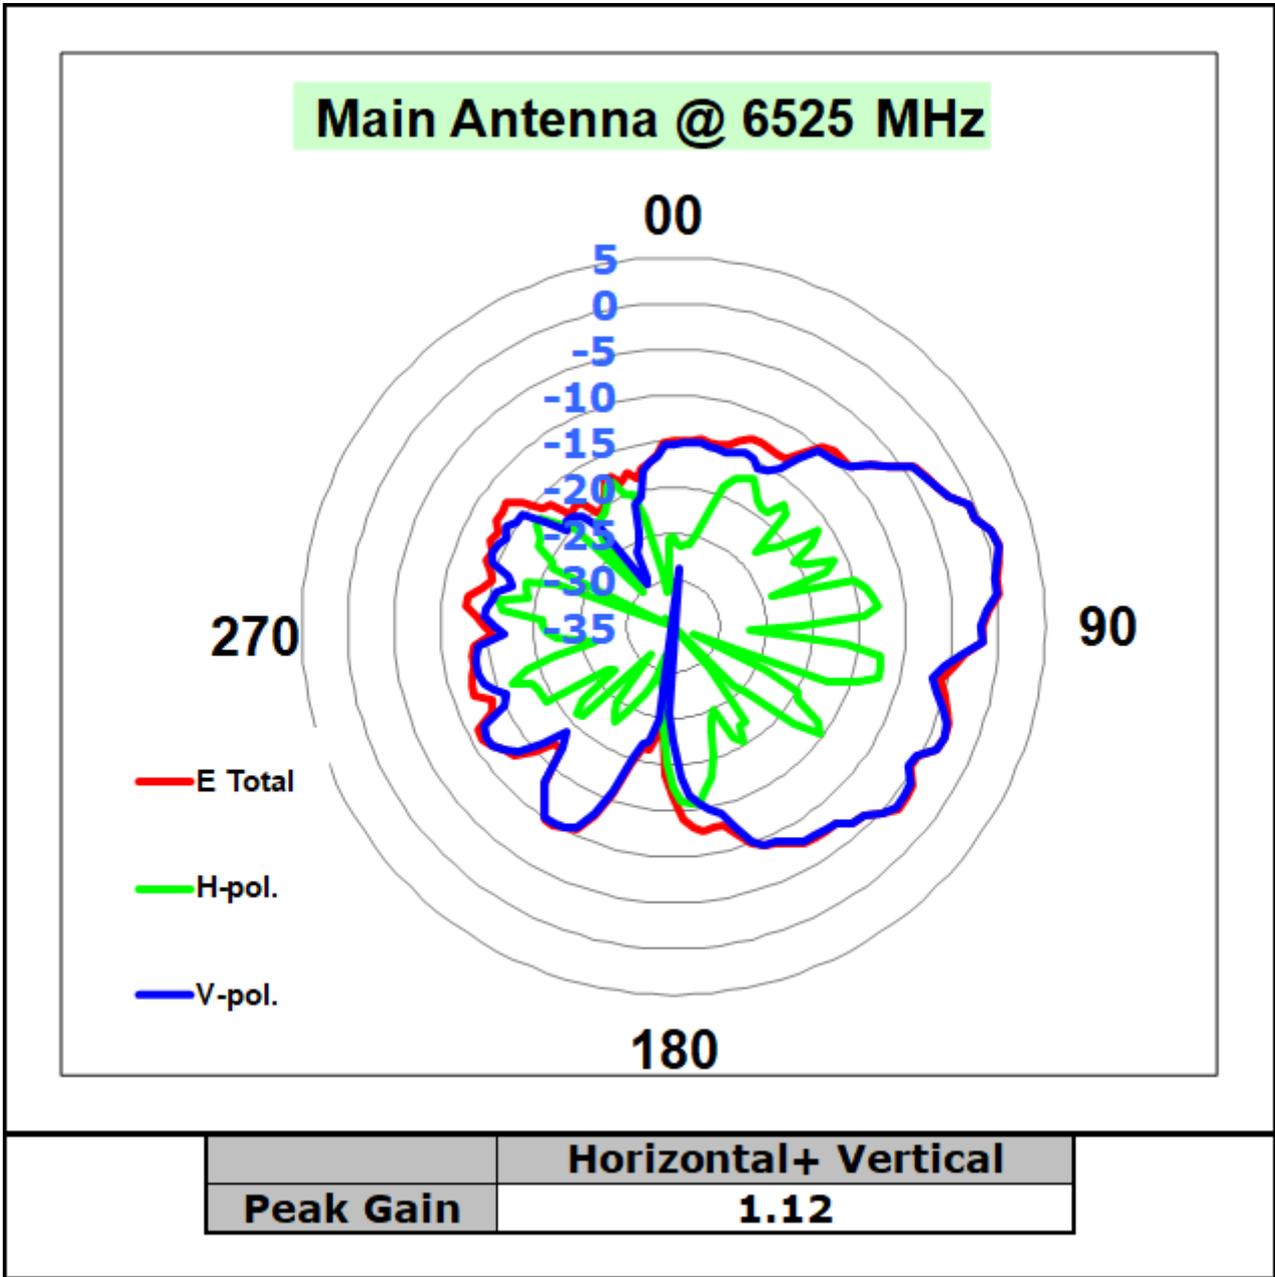

Max Antenna 2D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6875-7125	0.83

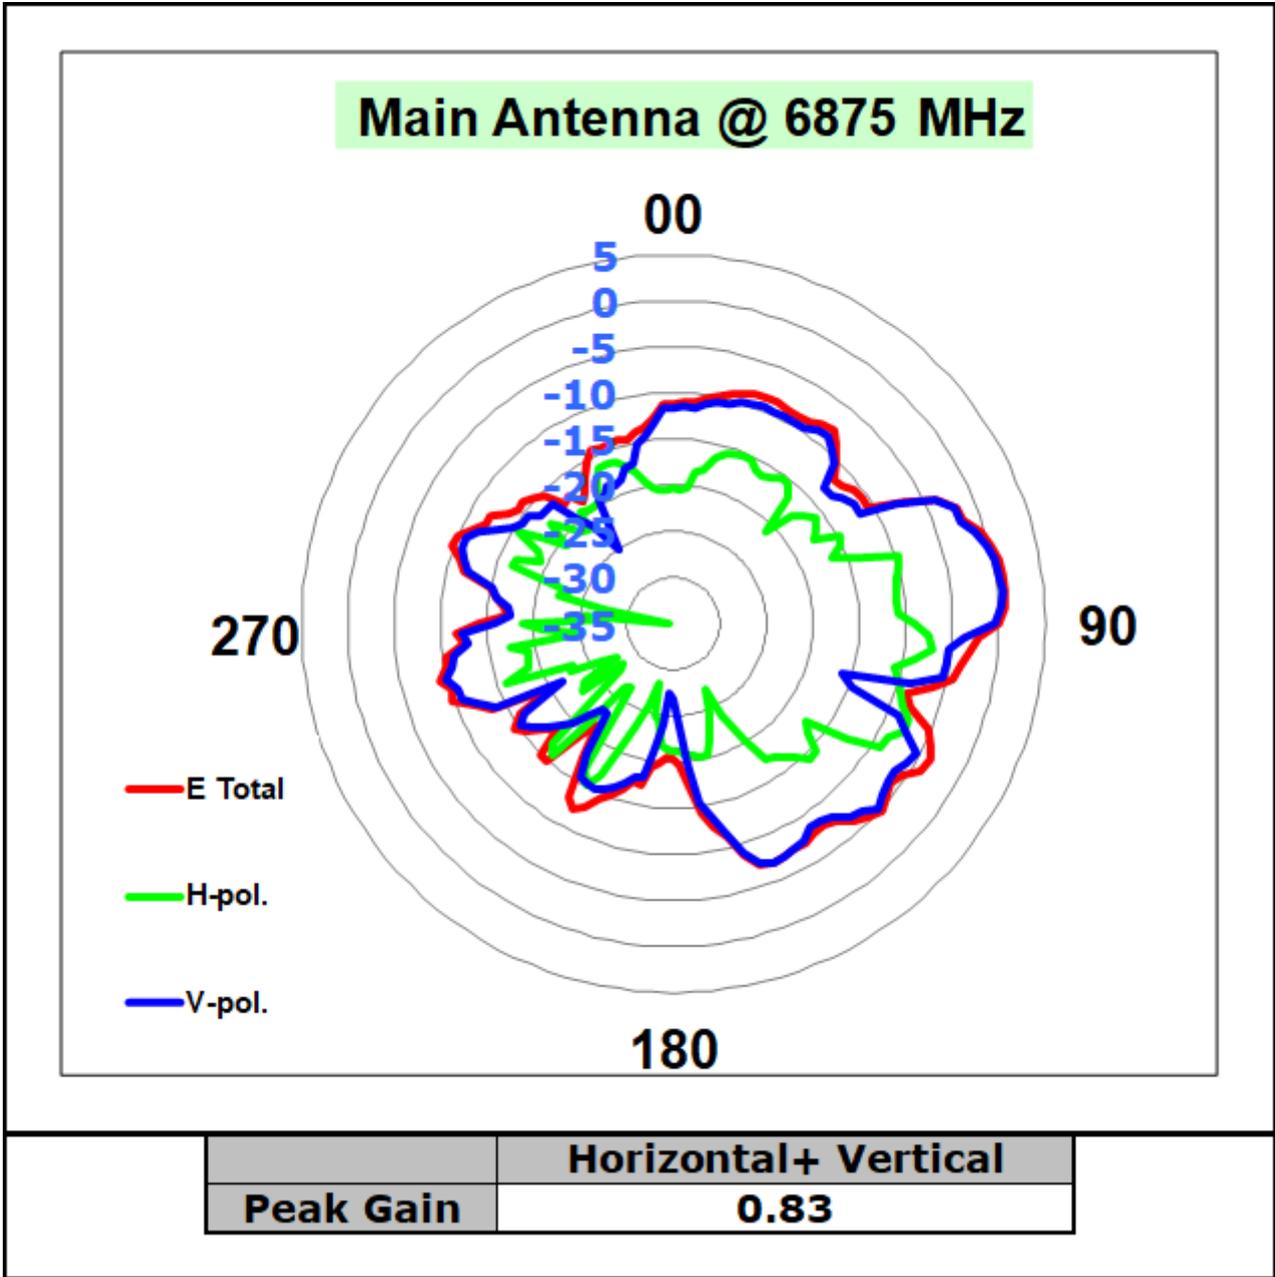

Auxiliary Antenna


Max Antenna 2D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
2400-2483.5	-2.48

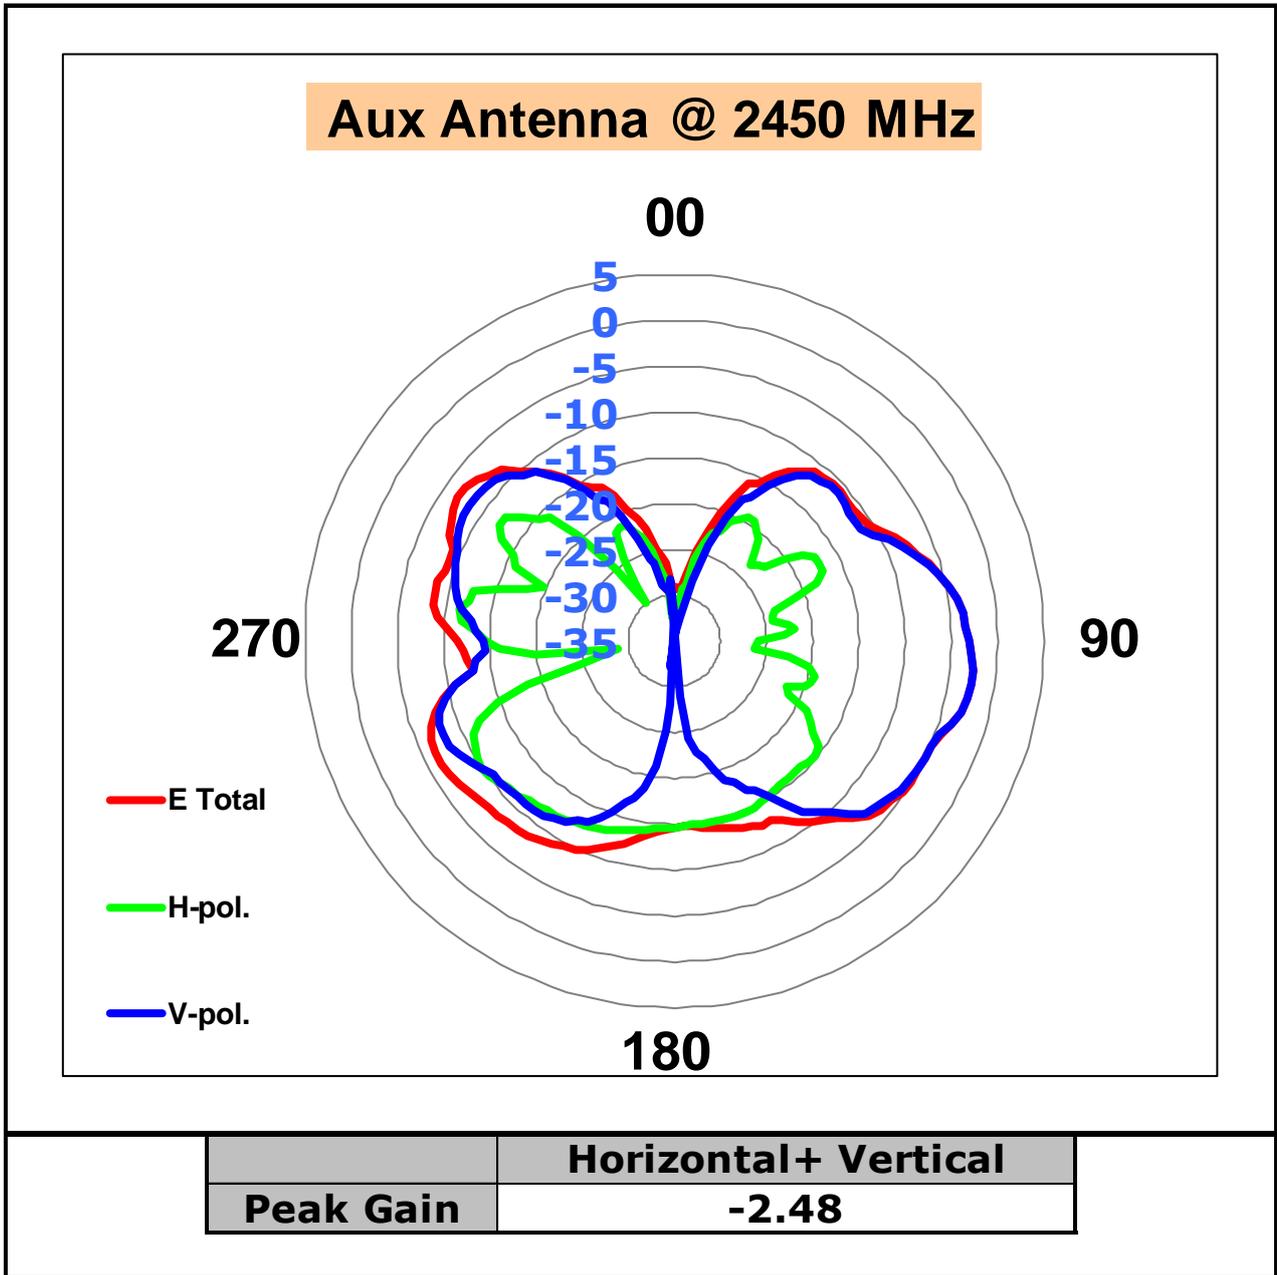


Max Antenna 2D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5150-5250	-1.56

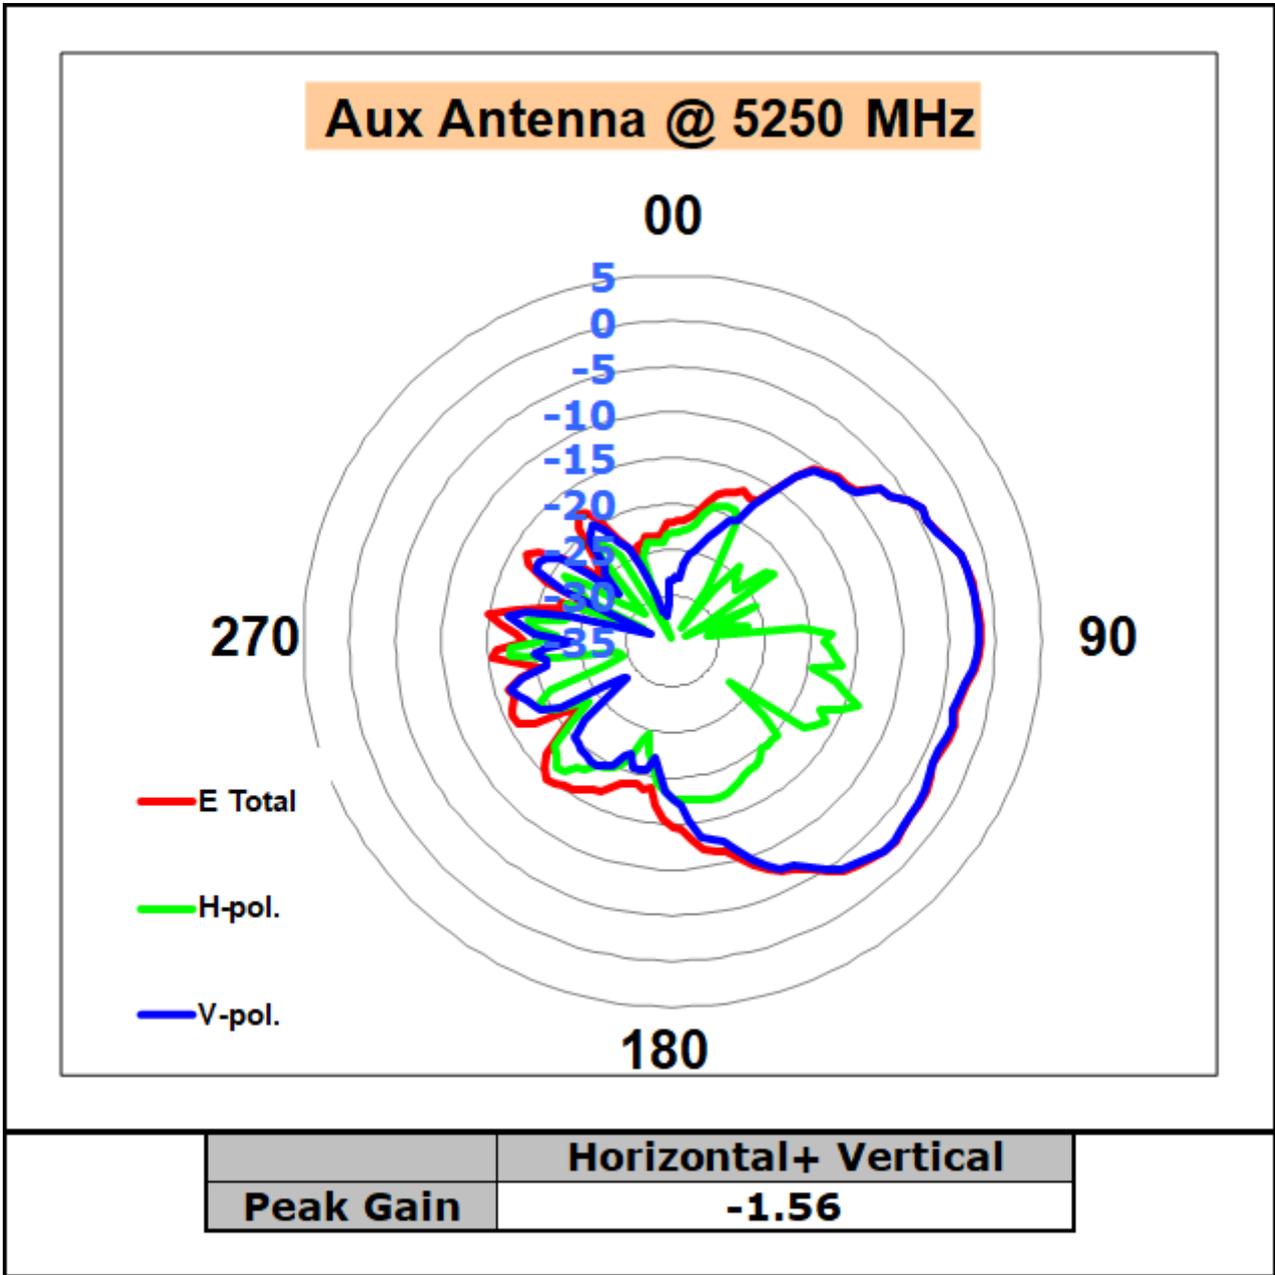


Max Antenna 2D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5250-5350	-0.42

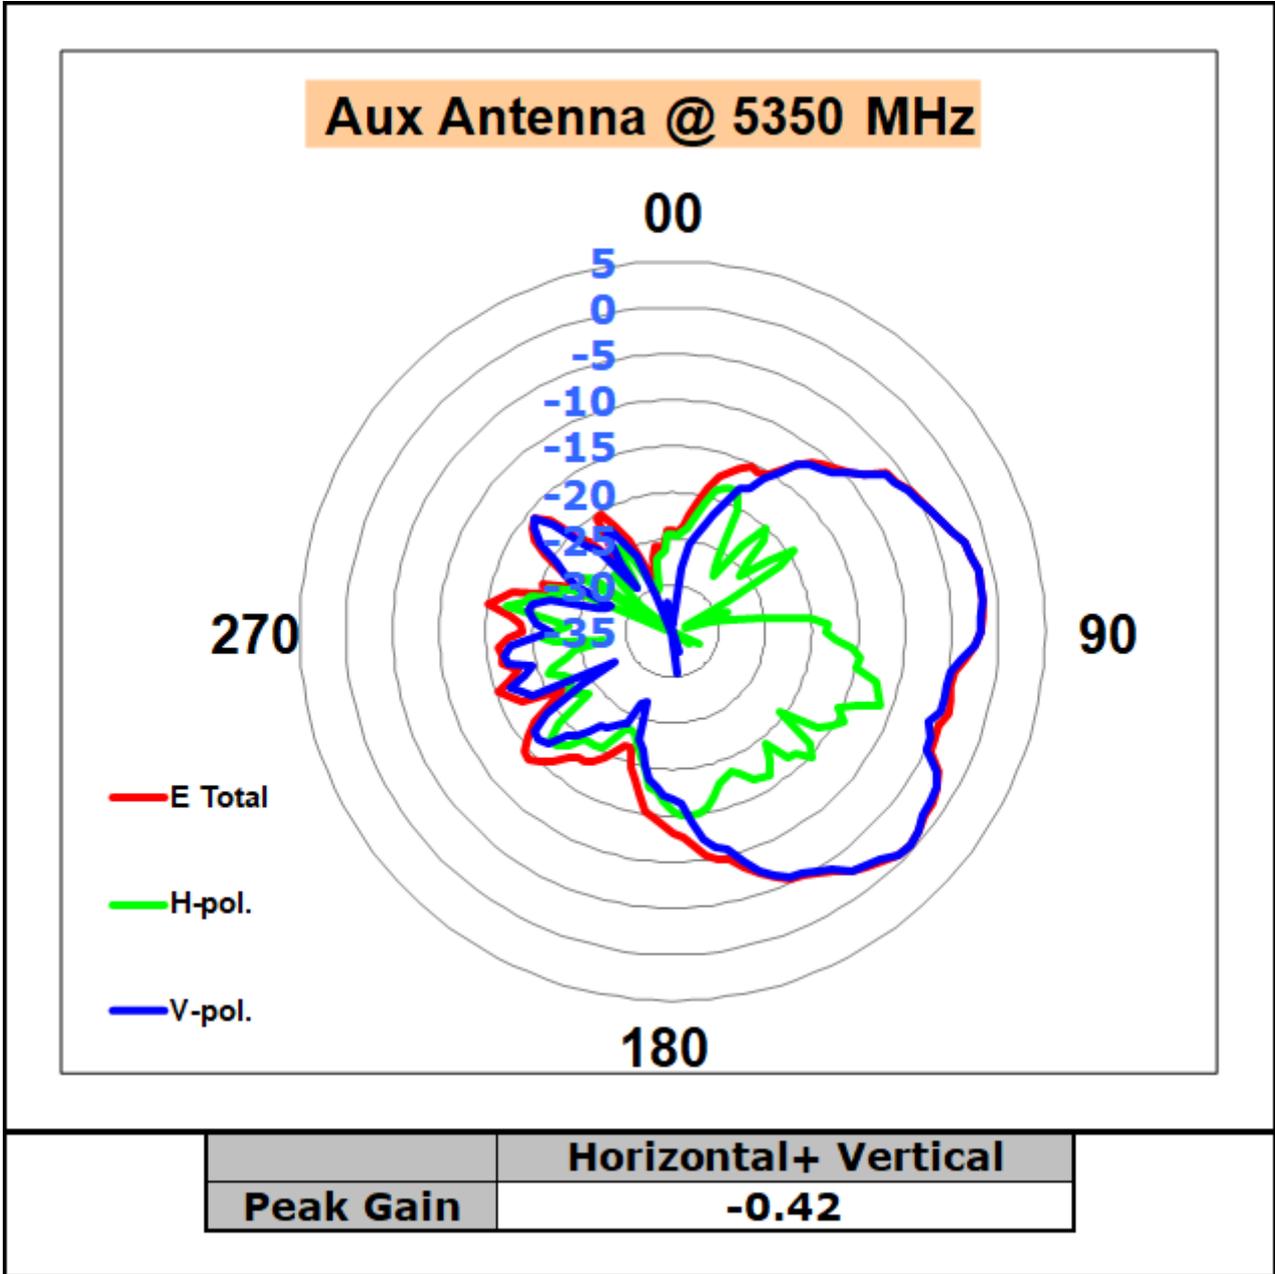


Max Antenna 2D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5470-5725	0.24

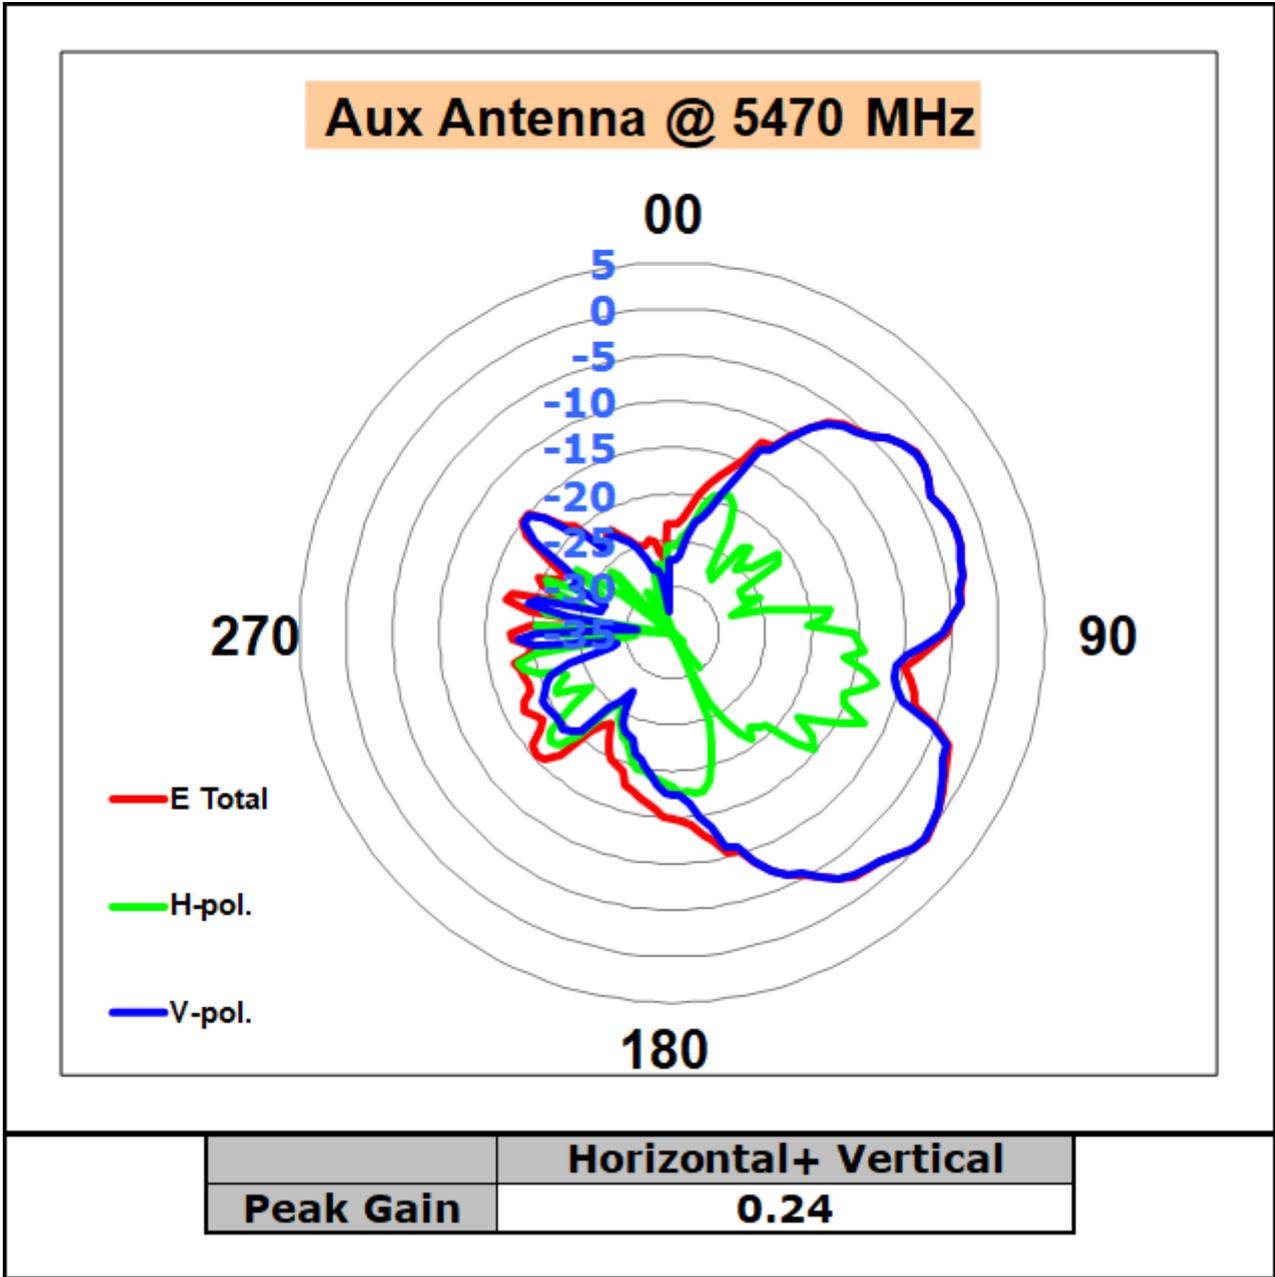


Max Antenna 2D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5725-5850	-0.16

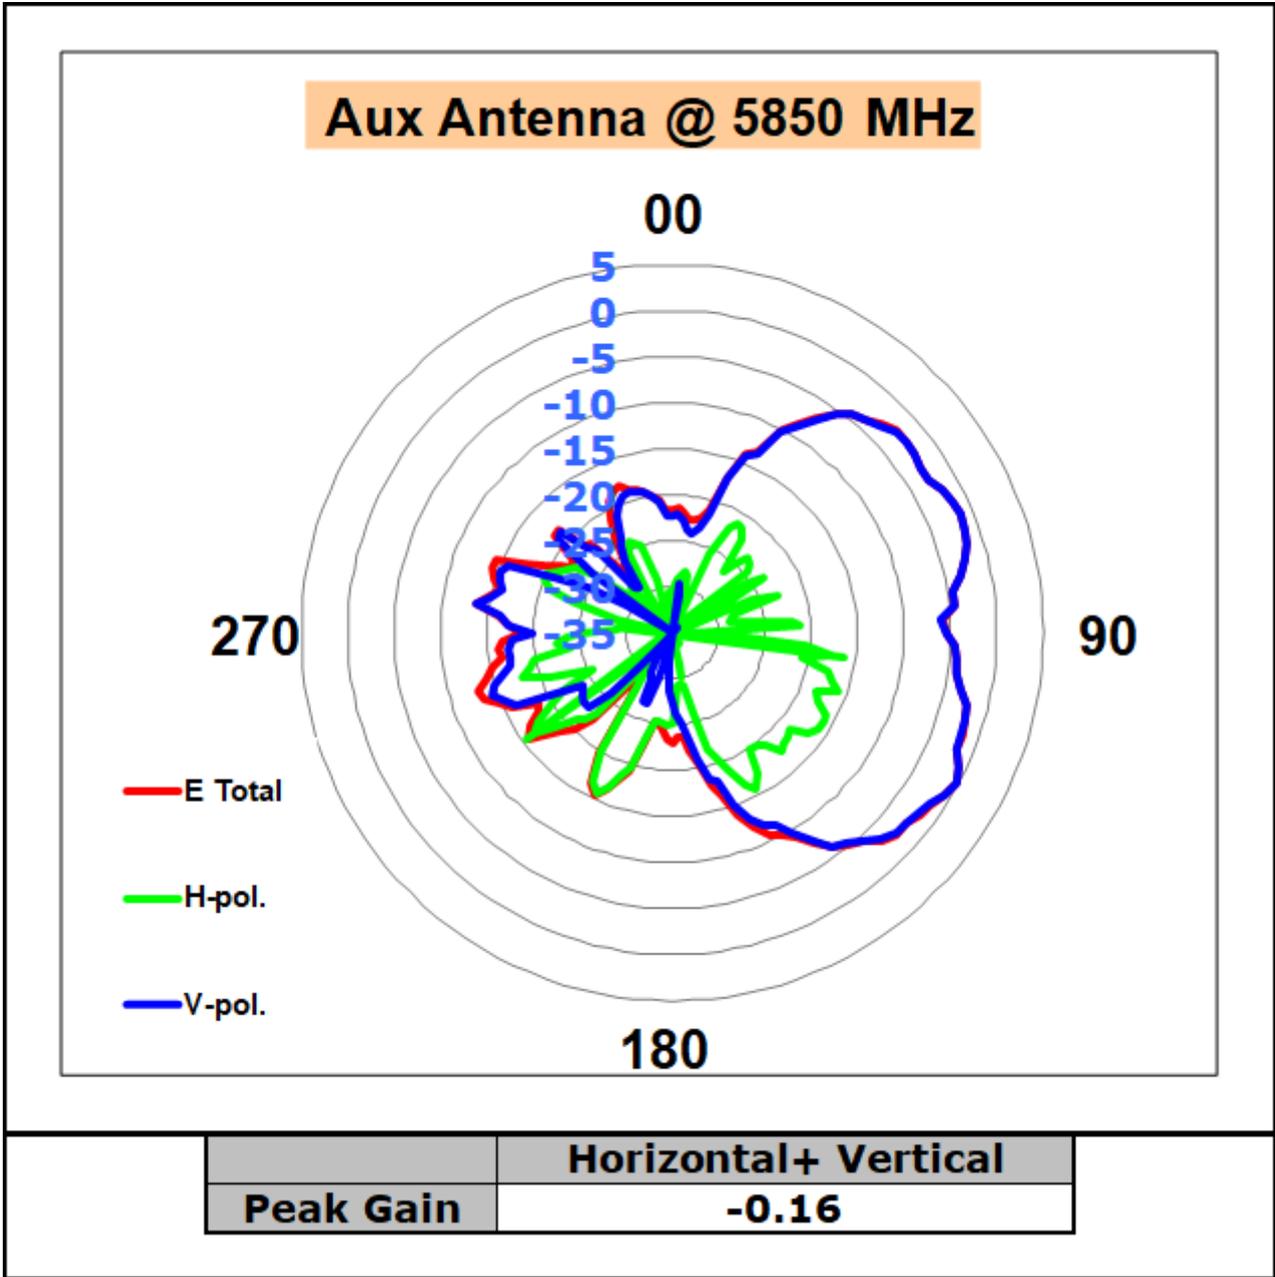


Max Antenna 2D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6425-6525	-1.13

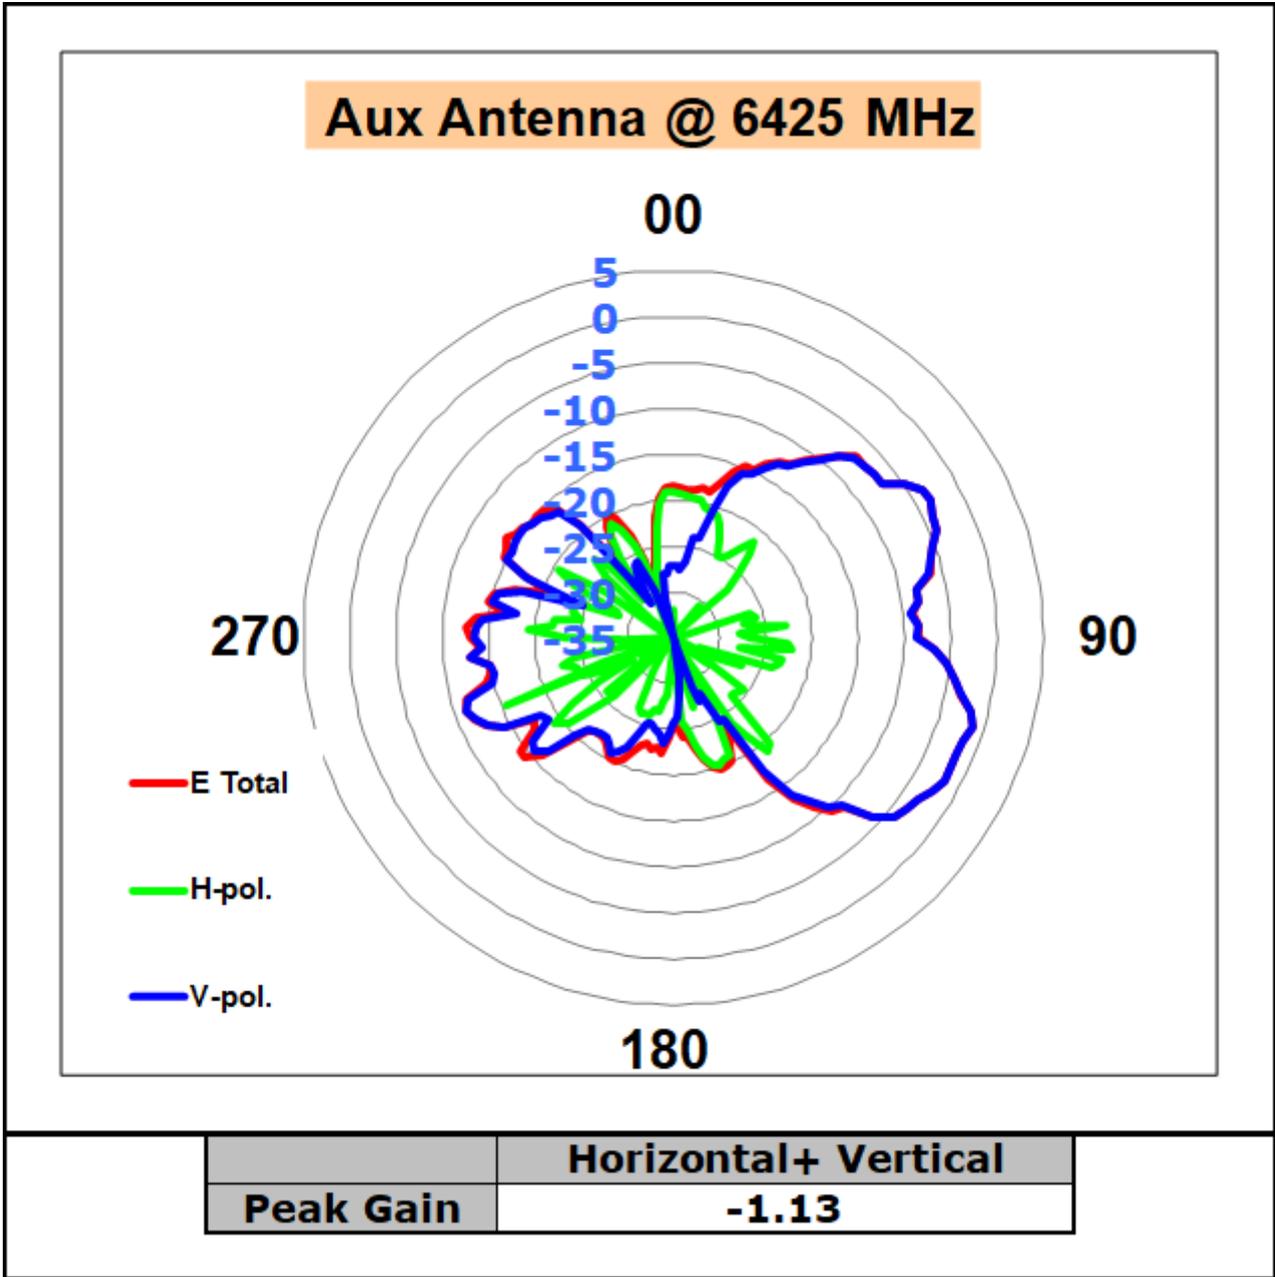

Max Antenna 2D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6525-6875	0.37

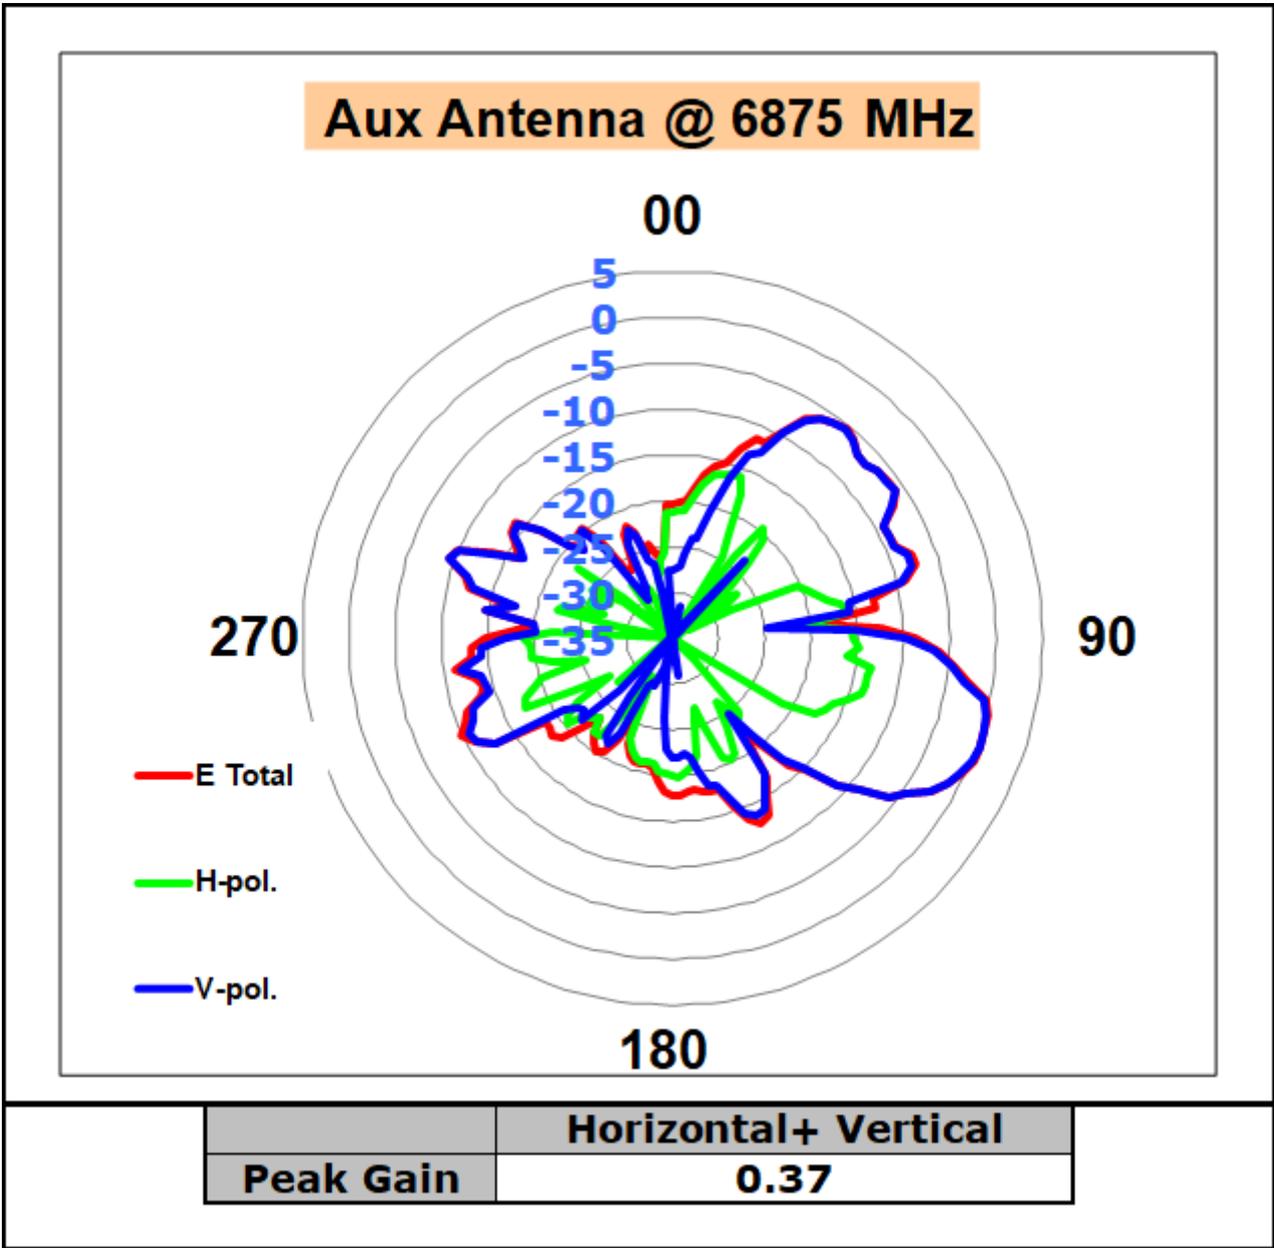

Max Antenna 2D Radiation Pattern 6875-7125 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6875-7125	0.37

