


ProCurve Networking

# J8441A

## 5 dBi Omni Antenna

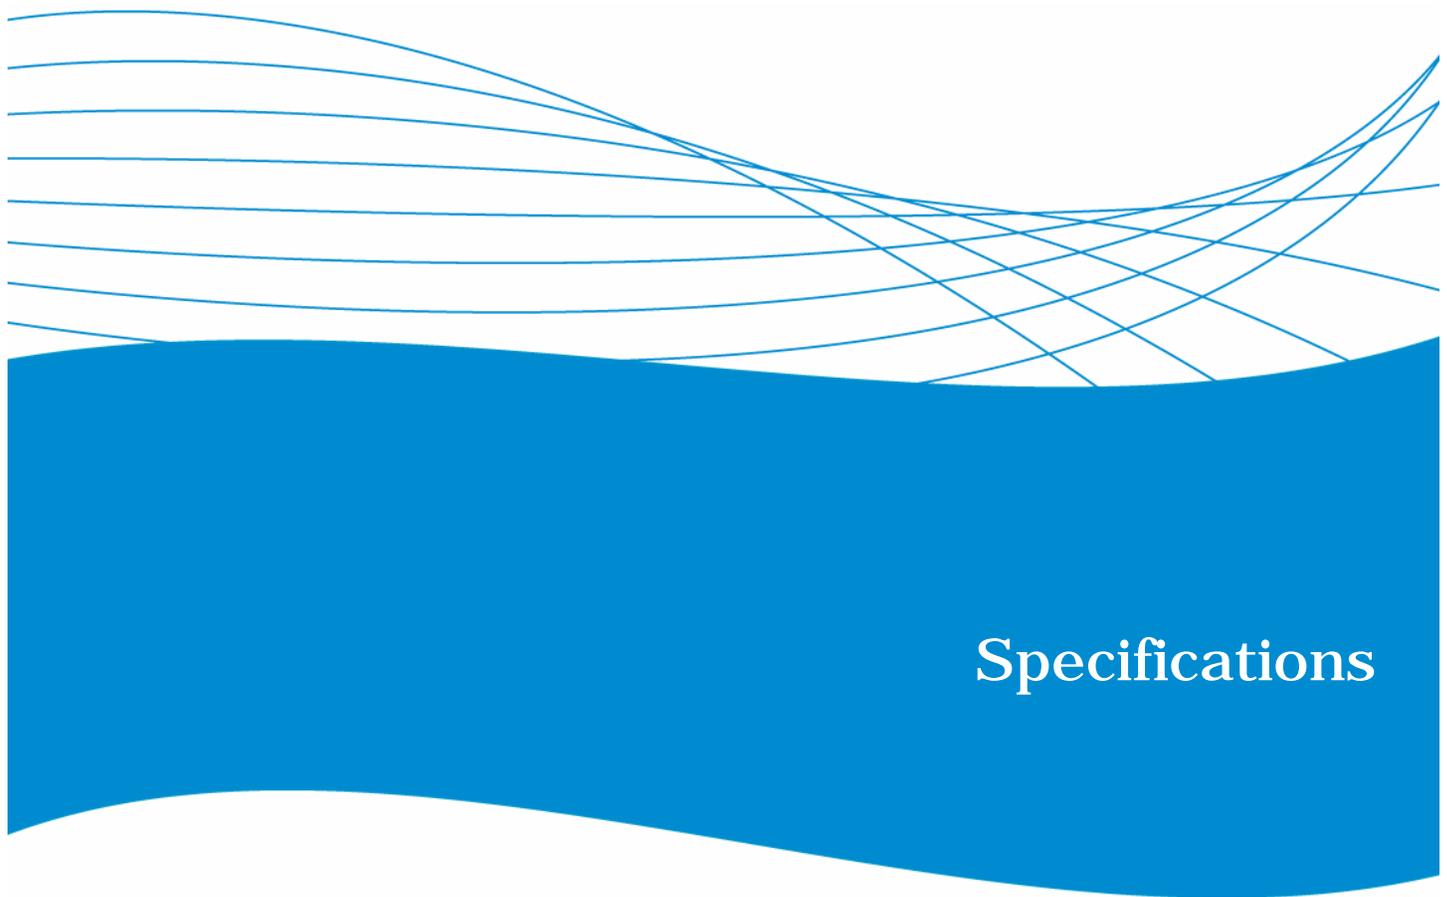

Specifications

Table of Contents – J8441A

Technical Specifications.....3  
Radiation Patterns .....4  
Illustration & Mounting..... 10

## Antenna Specifications – J8441A


Item	Specification
HP Product Number	J8441A
Cushcraft Part Number	S2403BPXH33RSM
Frequency (MHz)	2400-2500
Gain w/specified cable (dBi)	4.4
VSWR max	1.7:1
E-Plane (3dB beamwidth)	31°
H-Plane (3dB beamwidth)	Omnidirectional
Polarization	Linear (vertical)
Impedance (Ohms)	50
Front to back ratio (dB)	N/A
Weight lb. (kg)	0.41 (0.14)
Dimensions in. (cm)	1.00 (2.54) diameter
Height in. (cm)	11.5 (29.2)
Mounting Style	ceiling, mast
Wind Surface Area ft <sup>2</sup> (m <sup>2</sup> )	0.08 (0.007)
Wind Survival mph (km/hr)	125 (200)
Enclosure	Polycarbonate, White
RF Connector	Rev. SMA (m)
Pigtail	33-inch CMP Plenum
Storage Temperature (min/max)	-40° to +65°C
Operating Temperature (min/max)	-30° to +55°C



48 Perimeter Road  
Manchester, NH 03103

Tel: 603-627-7877

Fax: 603-627-1764

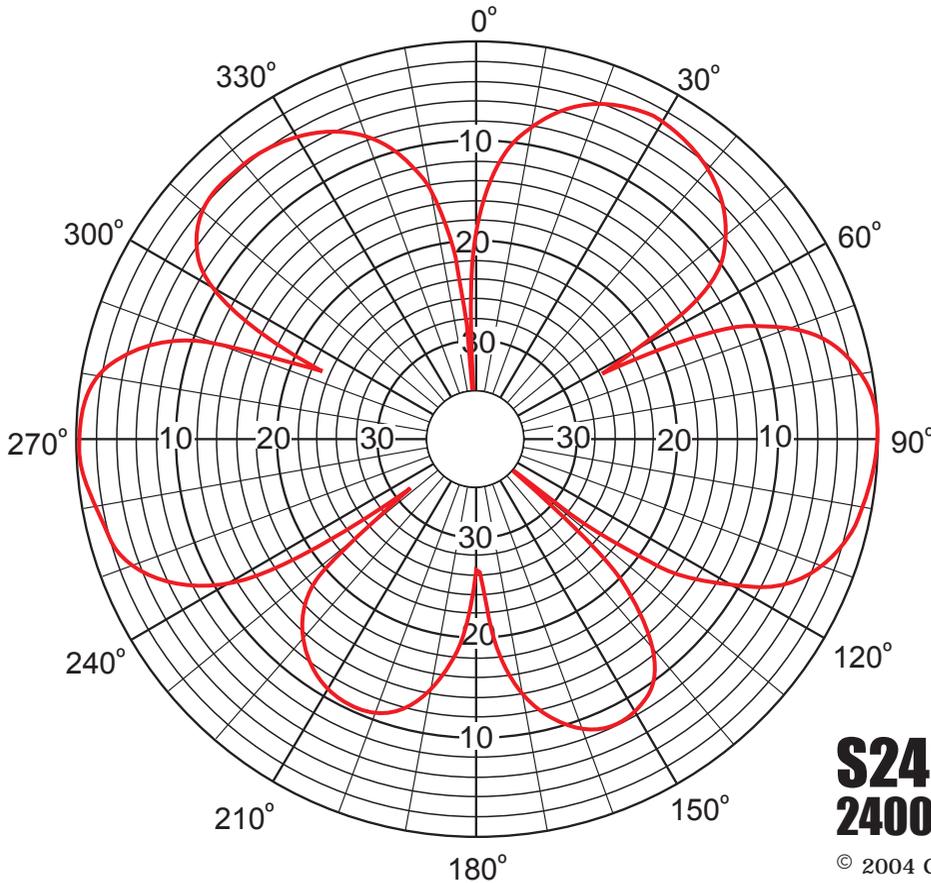

Peak Gain = 4.4dBi

# S2403BPXH33RSM

## 2400 MHz / E-Plane


© 2004 Cushcraft Corporation



48 Perimeter Road  
Manchester, NH 03103

Tel: 603-627-7877

Fax: 603-627-1764

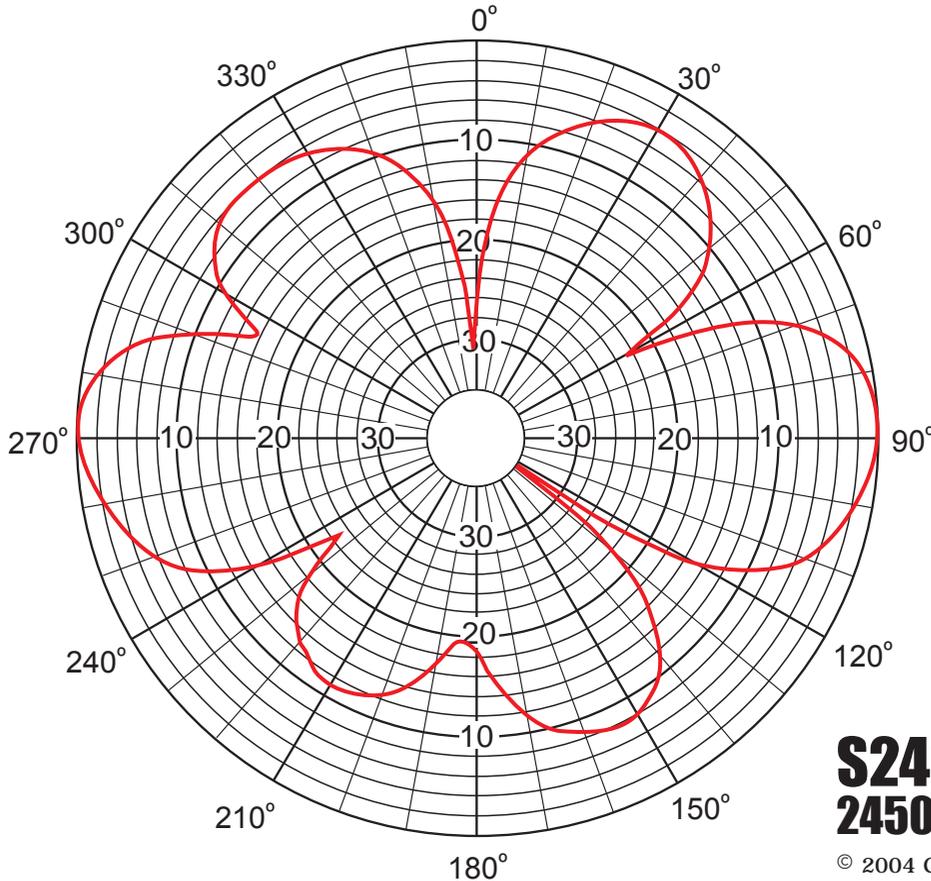

Peak Gain = 3.9 dBi

# **S2403BPXH33RSM**

## **2450 MHz / E-Plane**


© 2004 Cushcraft Corporation



48 Perimeter Road  
Manchester, NH 03103

Tel: 603-627-7877

Fax: 603-627-1764

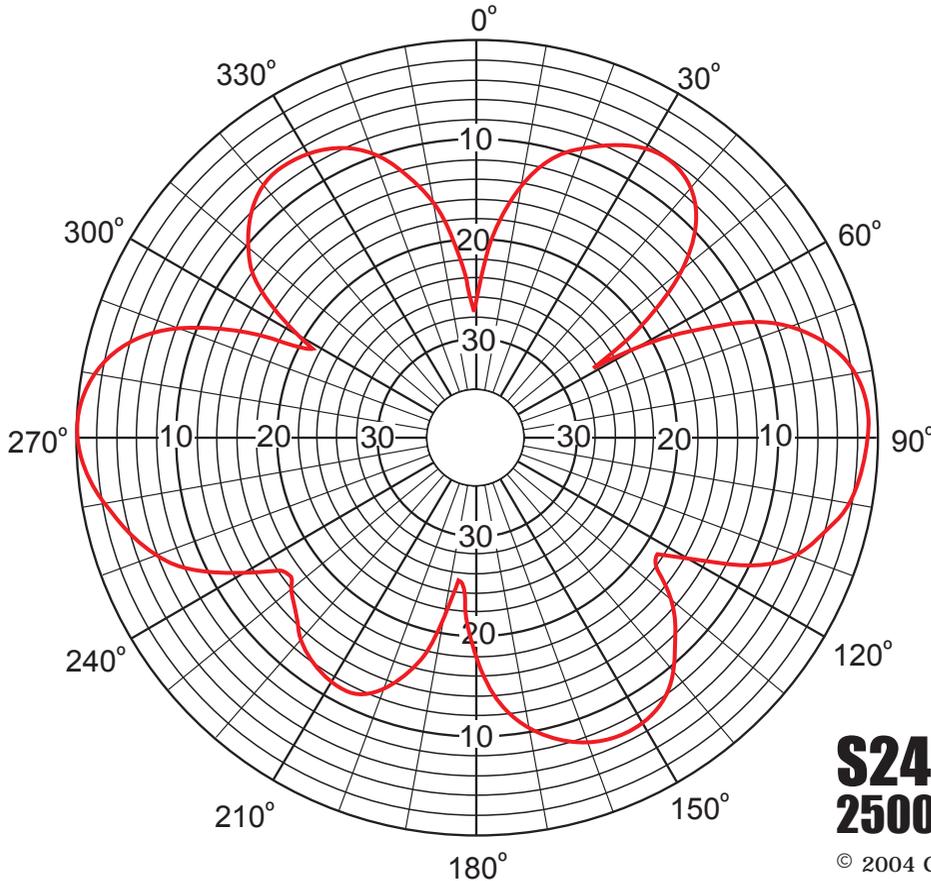

Peak Gain = 4.0 dBi

# S2403BPXH33RSM

## 2500 MHz / E-Plane


© 2004 Cushcraft Corporation



48 Perimeter Road  
Manchester, NH 03103

Tel: 603-627-7877

Fax: 603-627-1764

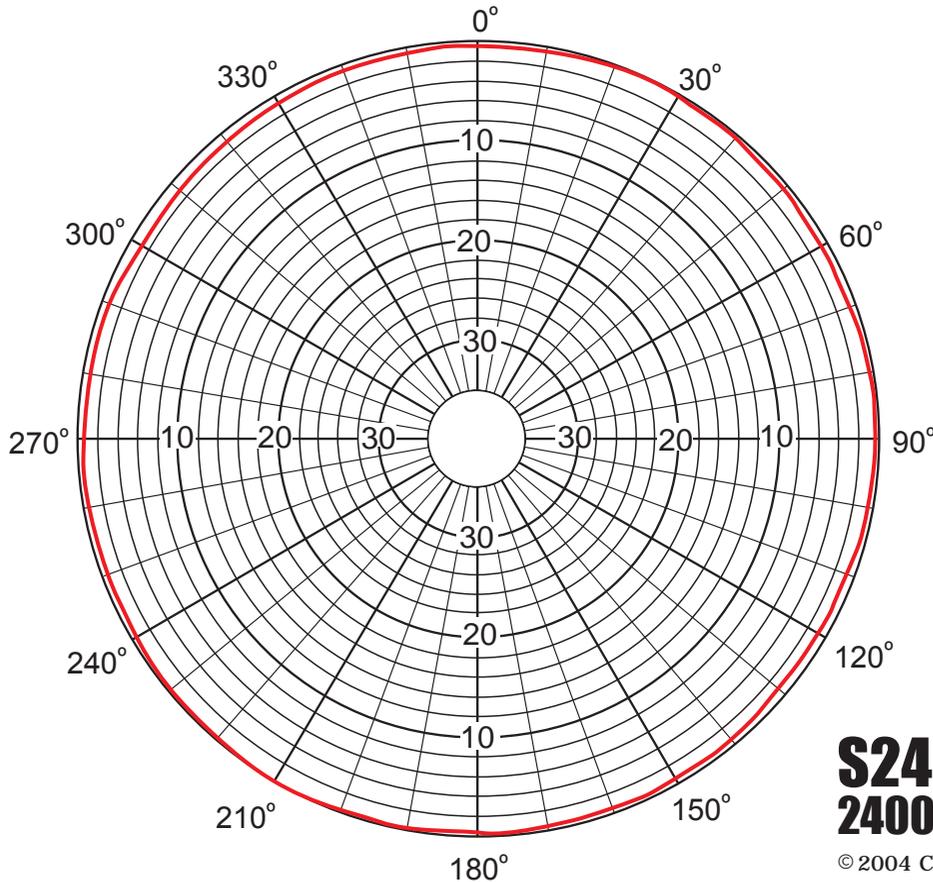

Peak Gain = 4.4 dBi

# **S2403BPXH33RSM**

## **2400 MHz / H-Plane**


© 2004 Cushcraft Corporation



48 Perimeter Road  
Manchester, NH 03103

Tel: 603-627-7877

Fax: 603-627-1764

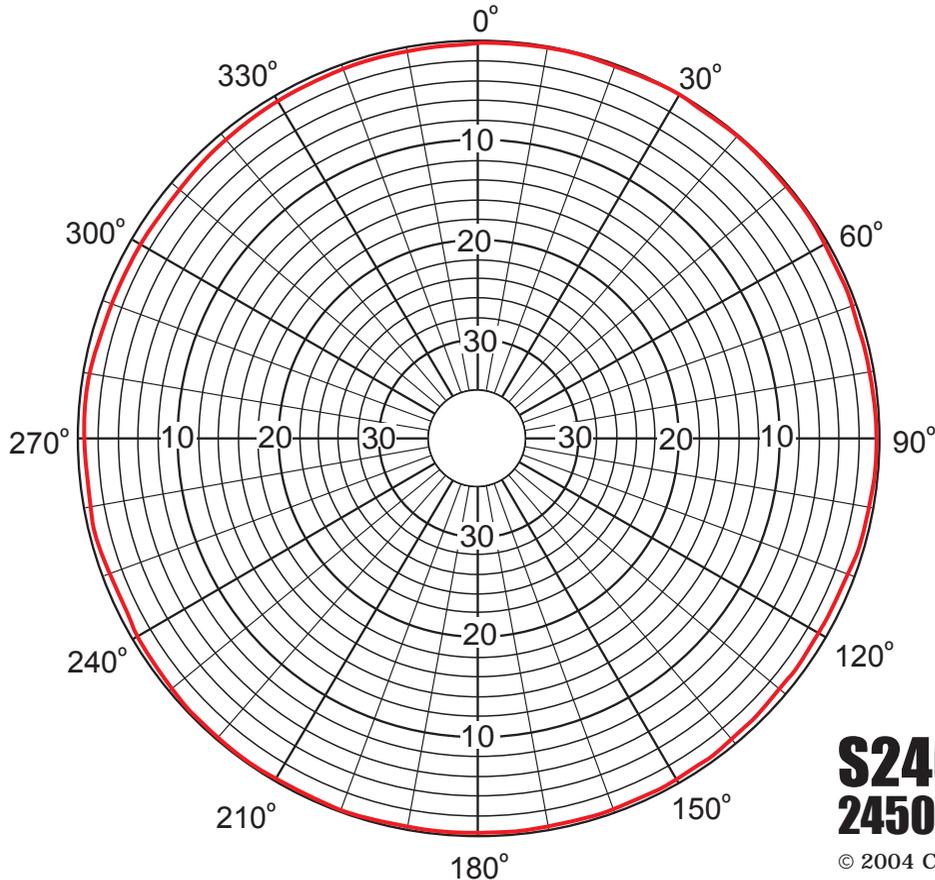

Peak Gain = 3.9 dBi

# **S2403BPXH33RSM**

## **2450 MHz / H-Plane**


© 2004 Cushcraft Corporation



48 Perimeter Road  
Manchester, NH 03103

Tel: 603-627-7877

Fax: 603-627-1764

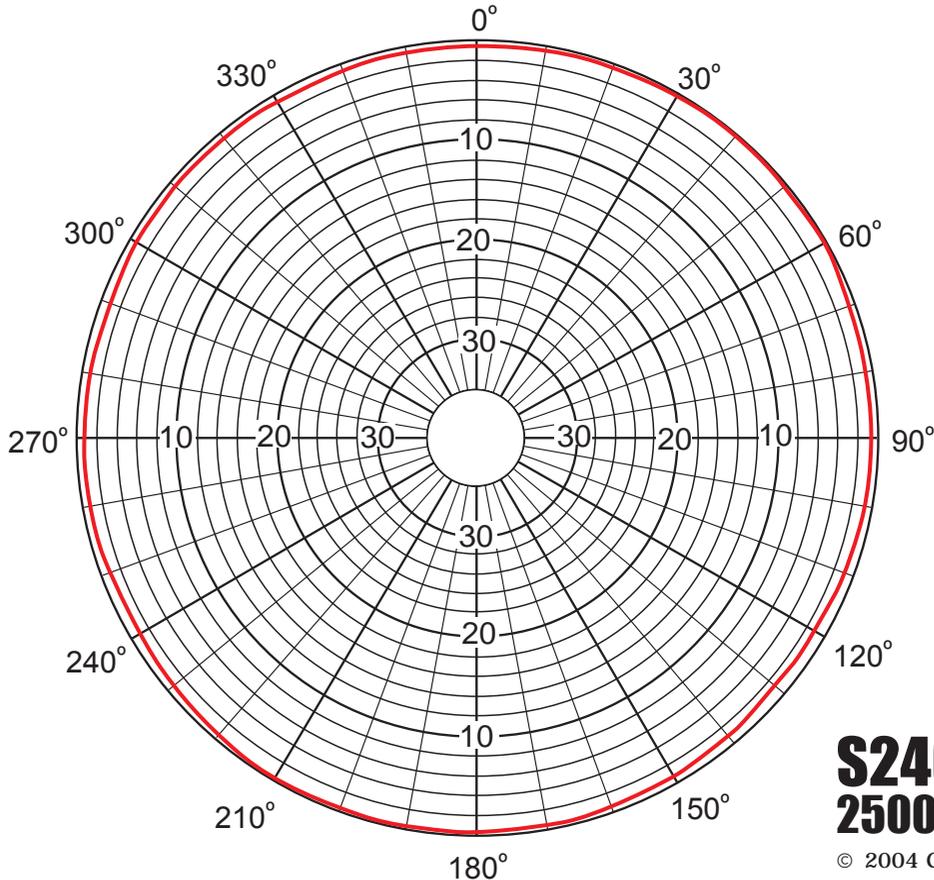


Peak Gain = 4.0 dBi

# **S2403BPXH33RSM**


## **2500 MHz / H-Plane**

© 2004 Cushcraft Corporation


REVISION			
LTR	DESCRIPTION	DATE	INITIAL
1	PRELIMINARY RELEASE	3-3-04	SWJ
AA	FORMAL RELEASE	4-8-04	SWJ

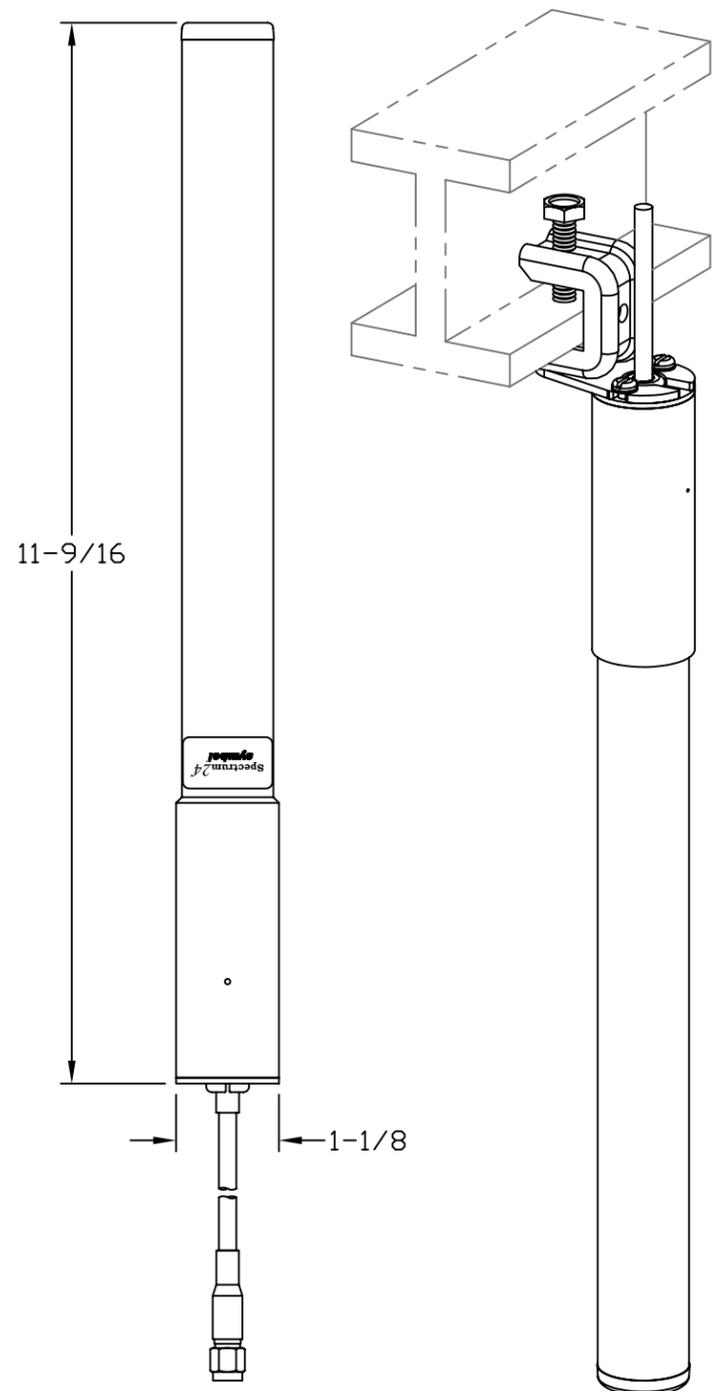

I-BEAM CLAMP CONFIGURATION (INDOOR ONLY)

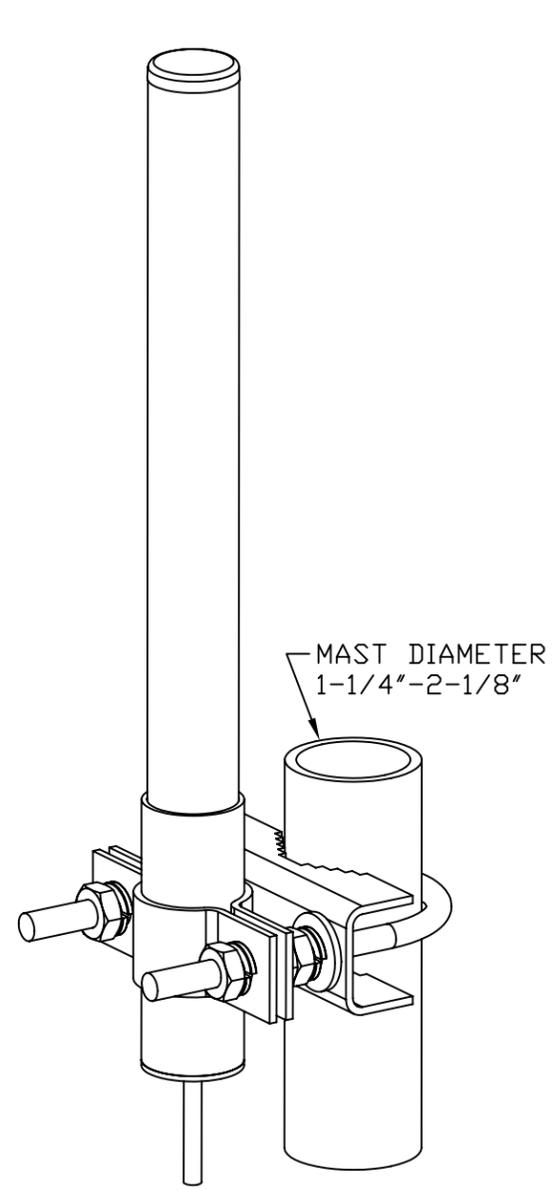

MAST MOUNT CONFIGURATION

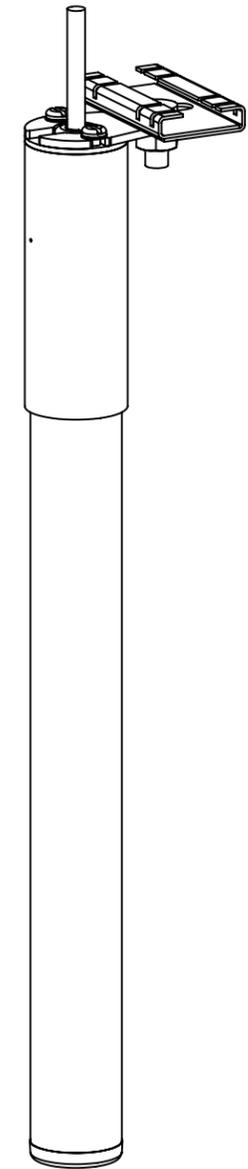

CEILING MOUNT CONFIGURATION (INDOOR ONLY)

Parameter	Performance
HP Part Number	J8441A
Cushcraft Part Number	(S2403BPXH33RSM)
Frequency (MHz)	2400-2500
Gain dBi (w/12" cable)	5
Gain dBi (w/specified cable)	4.4
VSWR max	1.7:1
E-Plane (3 dB beamwidth)	31°
H-Plane (3 dB beamwidth)	Omnidirectional
Polarization	Linear (Vertical)
Impedance (Ohms)	50
Weight lb./kg	0.41 (0.14)
Mounting Style	Ceiling or Mast
Wind Surface Area ft <sup>2</sup> (m <sup>2</sup> )	0.08 (0.007)
Wind Survival mph (km/hr)	125 (200)
Enclosure	Polycarbonate, White
RF Connector	Rev. SMA (m)
Pigtail	33" CMP Plenum
Storage Temp min/max	-40 to +65 C
Operating Temp min/max	-30 to +55 C

MATERIAL:	DRAWN S JOHNSON	DATE 3-3-04	<b>CUSHCRAFT</b> 48 PERIMETER ROAD MANCHESTER NH. 03108
	ENGINEER R LITTLEFIELD	DATE 4-8-04	
DO NOT SCALE DRAWING	ENGINEERING MGR A ALEVY	DATE 4-8-04	TITLE: <b>S2403BPXH33RSM</b> <b>MOUNTING &amp; OUTLINE</b>
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: ANGLES ± 2° FRACTIONS ± 1/16" .XX ± 0.030" .XXX ± 0.015"	FINISH:		DRAWING NO. <b>S2403BPXH33RSMMO</b>
			REV <b>AA</b>
	SCALE 1:2	SIZE B	SHEET 1 OF 1

CONFIDENTIAL  
 © 2004, Cushcraft Corporation. Information contained in this document is of a proprietary and/or legally privileged nature. It may not be reproduced without express written permission of Cushcraft Corporation, Manchester, NH.