






Specifications

Frequency Range (MHz)	2400 - 2500
Peak Gain	0 dBi
VSWR	< 2.0 : 1
Polarization	lin
Powerhandling	10 Watt max
Feedpoint Impedance	50 Ohm


Features

- Small and Lightweight
- No tuning components
- Available in tape and reel or tray packaging for automatic mounting

2400 MHz Band

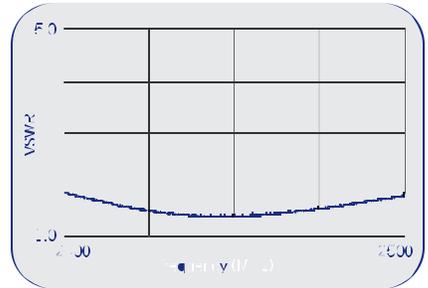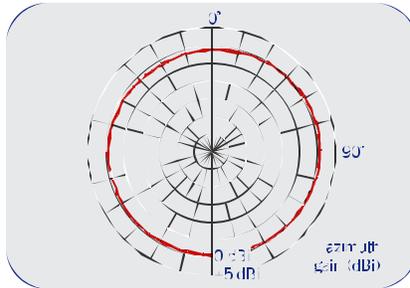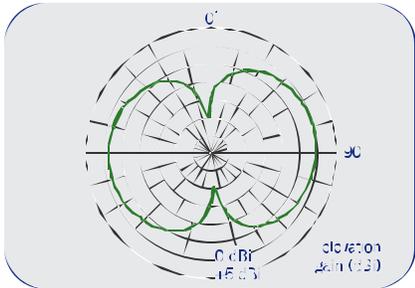

Legend

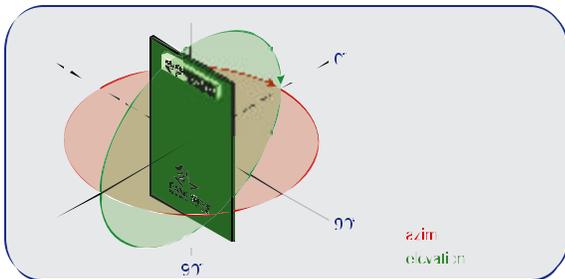

Approximate Dimensions

