

FCC TEST REPORT

REPORT NO.: RF971118L17

MODEL NO.: SDGOB-0892

RECEIVED: Nov. 18, 2008

TESTED: Dec.12 ~ Dec. 22, 2008

ISSUED: Dec. 23, 2008

APPLICANT: Hewlett Packard Company

ADDRESS: 3000 Hanover Street, Palo Alto, CA 94304

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang, Taipei Hsien 244, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan,
R.O.C.

This test report consists of 124 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





TABLE OF CONTENTS

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	5
3.	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	7
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	8
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	10
3.4	DESCRIPTION OF SUPPORT UNITS	10
4.	TEST TYPES AND RESULTS	11
4.1	RADIATED EMISSION MEASUREMENT	11
4.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT	11
4.1.2	TEST INSTRUMENTS	12
4.1.3	TEST PROCEDURES	13
4.1.4	DEVIATION FROM TEST STANDARD	13
4.1.5	TEST SETUP	14
4.1.6	EUT OPERATING CONDITIONS	14
4.1.7	TEST RESULTS	15
4.2	CONDUCTED EMISSION MEASUREMENT	41
4.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	41
4.2.2	TEST INSTRUMENTS	41
4.2.3	TEST PROCEDURES	42
4.2.4	DEVIATION FROM TEST STANDARD	42
4.2.5	TEST SETUP	43
4.2.6	EUT OPERATING CONDITIONS	43
4.2.7	TEST RESULTS	44
4.3	6dB BANDWIDTH MEASUREMENT	48
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	48
4.3.2	TEST INSTRUMENTS	48
4.3.3	TEST PROCEDURE	48
4.3.4	DEVIATION FROM TEST STANDARD	48
4.3.5	TEST SETUP	49
4.3.6	EUT OPERATING CONDITIONS	49
4.3.7	TEST RESULTS	50
4.4	MAXIMUM PEAK OUTPUT POWER	66
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	66
4.4.2	INSTRUMENTS	66
4.4.3	TEST PROCEDURES	66
4.4.4	DEVIATION FROM TEST STANDARD	66
4.4.5	TEST SETUP	67
4.4.6	EUT OPERATING CONDITIONS	67
4.4.7	TEST RESULTS	68
4.5	POWER SPECTRAL DENSITY MEASUREMENT	70
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	70
4.5.2	TEST INSTRUMENTS	70
4.5.3	TEST PROCEDURE	70
4.5.4	DEVIATION FROM TEST STANDARD	70



A D T

4.5.5	TEST SETUP	71
4.5.6	EUT OPERATING CONDITION	71
4.5.7	TEST RESULTS	72
4.6	BAND EDGES MEASUREMENT	88
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	88
4.6.2	TEST INSTRUMENTS	88
4.6.3	TEST PROCEDURE	88
4.6.4	DEVIATION FROM TEST STANDARD	88
4.6.5	EUT OPERATING CONDITION	88
4.6.6	TEST RESULTS	89
4.7	ANTENNA REQUIREMENT	121
4.7.1	STANDARD APPLICABLE	121
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	121
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	122
6.	INFORMATION ON THE TESTING LABORATORIES	123
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	124

1. CERTIFICATION

PRODUCT: 802.11 b/g/n WLAN Module

MODEL: SDGOB-0892

BRAND: HP

APPLICANT: Hewlett Packard Company

TESTED: Dec.12 ~ Dec. 22, 2008

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 15, Subpart C (Section 15.247)
ANSI C63.4-2003

The above equipment (model: SDGOB-0892) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Andrea Hsia , **DATE:** Dec. 23, 2008
Andrea Hsia / Specialist

TECHNICAL
ACCEPTANCE : Long Chen , **DATE:** Dec. 23, 2008
Responsible for RF Long Chen / Senior Engineer

APPROVED BY : Gary Chang , **DATE:** Dec. 23, 2008
Gary Chang / Assistant Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -14.02dB at 0.213MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.00dB at 2483.50MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	2.93 dB
	200MHz ~1000MHz	2.95 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	802.11 b/g/n WLAN Module
MODEL NO.	SDGOB-0892
FCC ID	B94SDGOB0892
POWER SUPPLY	3.3Vdc from host equipment
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps Draft 802.11n: up to 150Mbps
FREQUENCY RANGE	2400MHz ~ 2483.5MHz
NUMBER OF CHANNEL	11 for 802.11b, 802.11g, draft 802.11n (20MHz) 7 for draft 802.11n (40MHz)
MAXIMUM OUTPUT POWER	322.849mW
ANTENNA TYPE	PCB PIFA antenna with 2.2dBi gain
DATA CABLE	NA
I/O PORTS	NA
ACCESSORY DEVICES	NA

NOTE:

- The following models are provided to this EUT. Difference between these 2 models is only location of connector.

BRAND	PART NUMBER	MODEL NAME	REMARK
HP	1150-7936	SDGOB-0892	Connector at the front of EUT
HP	1150-7935	SDGOB-0892	Connector at the bottom of EUT

- The EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
802.11b	1TX
802.11g	1TX
Draft 802.11n (20MHz)	1TX
Draft 802.11n (40MHz)	1TX

- The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES


Eleven channels are provided for 802.11b, 802.11g and draft 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Seven channels are provided for draft 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2422MHz	5	2442MHz
2	2427MHz	6	2447MHz
3	2432MHz	7	2452MHz
4	2437MHz		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

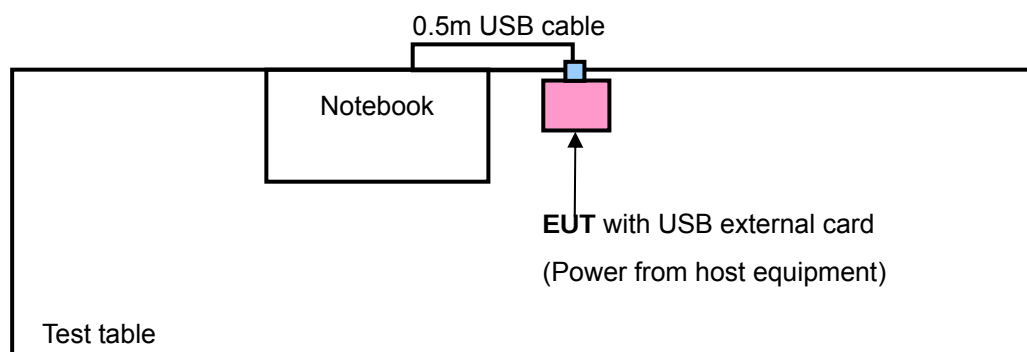

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
A	√	√	√	√	For Part No.: 1150-7936
B	√	√	√	√	For Part No.: 1150-7935

Where PLC: Power Line Conducted Emission RE<1G: Radiated Emission below 1GHz
RE≥1G: Radiated Emission above 1GHz APCM: Antenna Port Conducted Measurement

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1	X
B	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1	X
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	X
B	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	X
A	Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5	X
B	Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5	X
A	Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	13.5	X
B	Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	13.5	X

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
A	Draft 802.11n (20MHz)	1 to 11	6	OFDM	BPSK	6.5	X
B	Draft 802.11n (20MHz)	1 to 11	6	OFDM	BPSK	6.5	X

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	Draft 802.11n (20MHz)	1 to 11	6	OFDM	BPSK	6.5
B	Draft 802.11n (20MHz)	1 to 11	6	OFDM	BPSK	6.5

BANDEDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 11	DSSS	DBPSK	1
B	802.11b	1 to 11	1, 11	DSSS	DBPSK	1
A	802.11g	1 to 11	1, 11	OFDM	BPSK	6
B	802.11g	1 to 11	1, 11	OFDM	BPSK	6
A	Draft 802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	6.5
B	Draft 802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	6.5
A	Draft 802.11n (40MHz)	1 to 7	1, 7	OFDM	BPSK	13.5
B	Draft 802.11n (40MHz)	1 to 7	1, 7	OFDM	BPSK	13.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
B	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
B	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
A	Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
B	Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
A	Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	13.5
B	Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	13.5

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	PP05L	12130898320	E2K24CLNS
2	USB EXTERNAL CARD	AzureWave	1074-ADAPTERV02	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	0.5m USB cable
2	NA

NOTE 1: All power cords of the above support units are non shielded (1.8m).

NOTE 2: Item 2 & 0.5m USB cable were supplied from client.

4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400 / F(kHz)	300
0.490 ~ 1.705	24000 / F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100212	May 28, 2008	May 27, 2009
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Aug. 08, 2008	Aug. 07, 2009
BILOG Antenna SCHWARZBECK	VULB9168	9168-156	Apr. 25, 2008	Apr. 24, 2009
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 07, 2008	Jan. 06, 2009
Preamplifier Agilent	8449B	3008A01911	Sep. 10, 2008	Sep. 09, 2009
Preamplifier Agilent	8447D	2944A10634	Oct. 23, 2008	Oct. 22, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218190/4 231241/4	May 20, 2008	May 19, 2009
RF signal cable Worken	8D-FB	Cable-HYCH9-01	Aug. 09, 2008	Aug. 08, 2009
Software	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn Table Controller EMCO	2090	NA	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 9.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 460141.
 5. The IC Site Registration No. is IC 7450F-4.

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

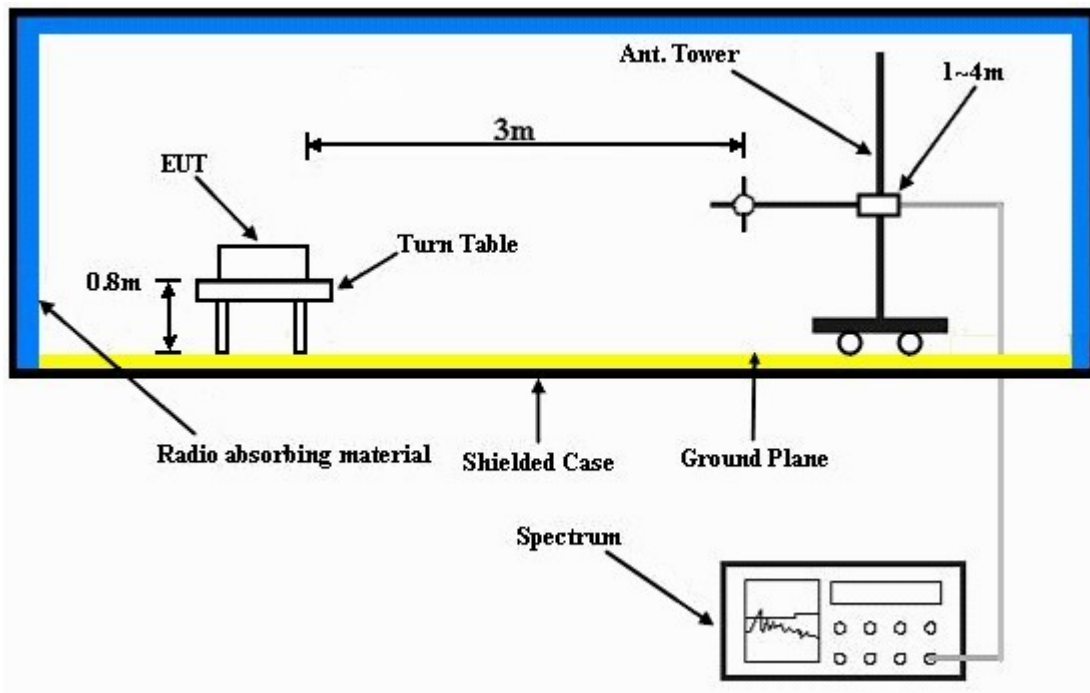

For the actual test configuration, please refer to the attached file (Test Setup Photo)

4.1.6 EUT OPERATING CONDITIONS

- Connected the EUT to notebook and placed on a testing table.
- The notebook ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.

4.1.7 TEST RESULTS

802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH 1000hPa	TEST MODE	A
TESTED BY	Antony Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.98 PK	74.00	-12.02	1.31 H	285	28.65	33.33
2	2390.00	52.14 AV	54.00	-1.86	1.31 H	285	18.81	33.33
3	*2412.00	113.72 PK			1.29 H	68	80.31	33.41
4	*2412.00	109.01 AV			1.29 H	68	75.60	33.41
5	4824.00	49.94 PK	74.00	-24.06	1.53 H	63	10.18	39.76
6	4824.00	42.27 AV	54.00	-11.73	1.53 H	63	2.51	39.76
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.05 PK	74.00	-13.95	1.66 V	360	26.72	33.33
2	2390.00	48.18 AV	54.00	-5.82	1.66 V	360	14.85	33.33
3	*2412.00	104.94 PK			1.66 V	360	71.53	33.41
4	*2412.00	100.40 AV			1.66 V	360	66.99	33.41
5	4824.00	50.64 PK	74.00	-23.36	1.00 V	27	10.88	39.76
6	4824.00	43.43 AV	54.00	-10.57	1.00 V	27	3.67	39.76

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH 1000hPa	TEST MODE	A
TESTED BY	Antony Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	113.47 PK			1.28 H	285	79.98	33.49
2	*2437.00	108.70 AV			1.28 H	285	75.21	33.49
3	4874.00	53.34 PK	74.00	-20.66	1.00 H	239	13.46	39.88
4	4874.00	48.49 AV	54.00	-5.51	1.00 H	239	8.61	39.88
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	104.99 PK			1.32 V	13	71.50	33.49
2	*2437.00	100.29 AV			1.32 V	13	66.80	33.49
3	4874.00	51.38 PK	74.00	-22.62	1.04 V	213	11.50	39.88
4	4874.00	45.48 AV	54.00	-8.52	1.04 V	213	5.60	39.88

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH 1000hPa	TEST MODE	A
TESTED BY	Antony Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	112.38 PK			1.29 H	289	78.81	33.57
2	*2462.00	107.69 AV			1.29 H	289	74.12	33.57
3	2483.50	62.88 PK	74.00	-11.12	1.27 H	284	29.24	33.64
4	2483.50	53.00 AV	54.00	-1.00	1.27 H	284	19.36	33.64
5	4924.00	53.59 PK	74.00	-20.41	1.00 H	230	13.55	40.03
6	4924.00	49.10 AV	54.00	-4.90	1.00 H	230	9.06	40.03
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.13 PK			1.00 V	119	70.56	33.57
2	*2462.00	99.43 AV			1.00 V	119	65.86	33.57
3	2483.50	57.49 PK	74.00	-16.51	1.00 V	119	23.85	33.64
4	2483.50	47.92 AV	54.00	-6.08	1.00 V	119	14.28	33.64
5	4924.00	51.22 PK	74.00	-22.78	1.04 V	215	11.18	40.03
6	4924.00	45.94 AV	54.00	-8.06	1.04 V	215	5.90	40.03

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 1000hPa	TEST MODE	B
TESTED BY	Antony Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.94 PK	74.00	-10.06	1.07 H	337	30.86	33.08
2	2390.00	52.96 AV	54.00	-1.04	1.07 H	337	19.88	33.08
3	*2412.00	113.23 PK			1.07 H	337	80.05	33.18
4	*2412.00	108.50 AV			1.07 H	337	75.32	33.18
5	4824.00	52.84 PK	74.00	-21.16	1.15 H	328	13.69	39.15
6	4824.00	49.35 AV	54.00	-4.65	1.15 H	328	10.20	39.15
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.65 PK	74.00	-15.35	1.62 V	209	25.57	33.08
2	2390.00	47.26 AV	54.00	-6.74	1.62 V	209	14.18	33.08
3	*2412.00	104.19 PK			1.62 V	209	71.01	33.18
4	*2412.00	99.46 AV			1.62 V	209	66.28	33.18
5	4824.00	51.42 PK	74.00	-22.58	1.09 V	165	12.27	39.15
6	4824.00	43.24 AV	54.00	-10.76	1.09 V	165	4.09	39.15

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 1000hPa	TEST MODE	B
TESTED BY	Antony Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	112.56 PK			1.05 H	336	79.28	33.28
2	*2437.00	108.25 AV			1.05 H	336	74.97	33.28
3	4874.00	52.12 PK	74.00	-21.88	1.02 H	335	12.97	39.14
4	4874.00	47.32 AV	54.00	-6.68	1.02 H	335	8.17	39.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	104.28 PK			1.63 V	227	71.00	33.28
2	*2437.00	99.60 AV			1.63 V	227	66.32	33.28
3	4874.00	48.74 PK	74.00	-25.26	1.33 V	334	9.59	39.14
4	4874.00	42.23 AV	54.00	-11.77	1.33 V	334	3.08	39.14

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 1000hPa	TEST MODE	B
TESTED BY	Antony Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	112.35 PK			1.04 H	331	78.97	33.38
2	*2462.00	107.74 AV			1.04 H	331	74.36	33.38
3	2483.50	63.38 PK	74.00	-10.62	1.04 H	333	29.92	33.46
4	2483.50	52.84 AV	54.00	-1.16	1.04 H	333	19.38	33.46
5	4924.00	50.31 PK	74.00	-23.69	1.00 H	333	10.95	39.35
6	4924.00	43.50 AV	54.00	-10.50	1.00 H	333	4.14	39.35
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.75 PK			1.58 V	209	71.37	33.38
2	*2462.00	100.13 AV			1.58 V	209	66.75	33.38
3	2483.50	58.28 PK	74.00	-15.72	1.58 V	208	24.82	33.46
4	2483.50	48.83 AV	54.00	-5.17	1.58 V	208	15.37	33.46
5	4924.00	49.41 PK	74.00	-24.59	1.48 V	333	10.05	39.35
6	4924.00	42.10 AV	54.00	-11.90	1.48 V	333	2.74	39.35

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.

802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH 1000hPa	TEST MODE	A
TESTED BY	Antony Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.68 PK	74.00	-2.32	1.34 H	288	38.35	33.33
2	2390.00	52.48 AV	54.00	-1.52	1.34 H	288	19.15	33.33
3	*2412.00	110.46 PK			1.29 H	286	77.05	33.41
4	*2412.00	100.13 AV			1.29 H	286	66.72	33.41
5	4824.00	47.77 PK	74.00	-26.23	1.00 H	0	8.01	39.76
6	4824.00	35.10 AV	54.00	-18.90	1.00 H	0	-4.66	39.76
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.33 PK	74.00	-8.67	1.67 V	360	32.00	33.33
2	2390.00	49.77 AV	54.00	-4.23	1.67 V	360	16.44	33.33
3	*2412.00	103.65 PK			1.67 V	360	70.24	33.41
4	*2412.00	93.21 AV			1.67 V	360	59.80	33.41
5	4824.00	48.14 PK	74.00	-25.86	1.00 V	360	8.38	39.76
6	4824.00	34.76 AV	54.00	-19.24	1.00 V	360	-5.00	39.76

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH 1000hPa	TEST MODE	A
TESTED BY	Antony Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.98 PK	74.00	-13.02	1.29 H	290	27.65	33.33
2	2390.00	50.42 AV	54.00	-3.58	1.29 H	290	17.09	33.33
3	*2437.00	113.06 PK			1.29 H	290	79.57	33.49
4	*2437.00	102.89 AV			1.29 H	290	69.40	33.49
5	2483.50	61.84 PK	74.00	-12.16	1.29 H	290	28.20	33.64
6	2483.50	51.57 AV	54.00	-2.43	1.29 H	290	17.93	33.64
7	4874.00	47.66 PK	74.00	-26.34	1.29 H	360	7.78	39.88
8	4874.00	34.92 AV	54.00	-19.08	1.29 H	360	-4.96	39.88
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	106.62 PK			1.64 V	360	73.13	33.49
2	*2437.00	96.51 AV			1.64 V	360	63.02	33.49
3	4874.00	47.49 PK	74.00	-26.51	1.30 V	360	7.61	39.88
4	4874.00	34.59 AV	54.00	-19.41	1.30 V	360	-5.29	39.88

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH 1000hPa	TEST MODE	A
TESTED BY	Antony Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.31 PK			1.26 H	284	76.74	33.57
2	*2462.00	99.86 AV			1.26 H	284	66.29	33.57
3	2483.50	70.05 PK	74.00	-3.95	1.26 H	284	36.41	33.64
4	2483.50	52.99 AV	54.00	-1.01	1.26 H	284	19.35	33.64
5	4924.00	48.16 PK	74.00	-25.84	1.26 H	360	8.12	40.03
6	4924.00	35.26 AV	54.00	-18.74	1.26 H	360	-4.78	40.03
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.93 PK			1.65 V	360	70.36	33.57
2	*2462.00	93.53 AV			1.65 V	360	59.96	33.57
3	2483.50	62.15 PK	74.00	-11.85	1.64 V	360	28.51	33.64
4	2483.50	48.45 AV	54.00	-5.55	1.64 V	360	14.81	33.64
5	4924.00	47.69 PK	74.00	-26.31	1.20 V	0	7.65	40.03
6	4924.00	34.26 AV	54.00	-19.74	1.20 V	0	-5.78	40.03

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 1000hPa	TEST MODE	B
TESTED BY	Antony Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.53 PK	74.00	-1.47	1.06 H	337	39.45	33.08
2	2390.00	52.29 AV	54.00	-1.71	1.06 H	337	19.21	33.08
3	*2412.00	110.88 PK			1.05 H	338	77.70	33.18
4	*2412.00	100.75 AV			1.05 H	338	67.57	33.18
5	4824.00	47.30 PK	74.00	-26.70	1.00 H	10	8.15	39.15
6	4824.00	34.43 AV	54.00	-19.57	1.00 H	10	-4.72	39.15
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.43 PK	74.00	-14.57	1.62 V	211	26.35	33.08
2	2390.00	47.65 AV	54.00	-6.35	1.62 V	211	14.57	33.08
3	*2412.00	103.14 PK			1.62 V	211	69.96	33.18
4	*2412.00	92.89 AV			1.62 V	211	59.71	33.18
5	4824.00	46.22 PK	74.00	-27.78	1.00 V	360	7.07	39.15
6	4824.00	34.48 AV	54.00	-19.52	1.00 V	360	-4.67	39.15

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 1000hPa	TEST MODE	B
TESTED BY	Antony Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.31 PK	74.00	-13.69	1.04 H	341	27.23	33.08
2	2390.00	50.00 AV	54.00	-4.00	1.04 H	341	16.92	33.08
3	*2437.00	112.85 PK			1.04 H	341	79.57	33.28
4	*2437.00	102.69 AV			1.04 H	341	69.41	33.28
5	2483.50	61.48 PK	74.00	-12.52	1.02 H	341	28.02	33.46
6	2483.50	51.33 AV	54.00	-2.67	1.02 H	341	17.87	33.46
7	4874.00	47.09 PK	74.00	-26.91	1.02 H	360	7.94	39.14
8	4874.00	34.24 AV	54.00	-19.76	1.02 H	360	-4.91	39.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	104.96 PK			1.58 V	226	71.68	33.28
2	*2437.00	94.85 AV			1.58 V	226	61.57	33.28
3	4874.00	47.27 PK	74.00	-26.73	1.00 V	0	8.12	39.14
4	4874.00	34.63 AV	54.00	-19.37	1.00 V	0	-4.52	39.14

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 1000hPa	TEST MODE	B
TESTED BY	Antony Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.99 PK			1.31 H	340	77.61	33.38
2	*2462.00	100.28 AV			1.31 H	340	66.90	33.38
3	2483.50	71.02 PK	74.00	-2.98	1.30 H	340	37.56	33.46
4	2483.50	53.00 AV	54.00	-1.00	1.30 H	340	19.54	33.46
5	4924.00	47.31 PK	74.00	-26.69	1.30 H	360	7.95	39.35
6	4924.00	34.98 AV	54.00	-19.02	1.30 H	360	-4.38	39.35
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.81 PK			1.61 V	209	69.43	33.38
2	*2462.00	92.57 AV			1.61 V	209	59.19	33.38
3	2483.50	63.80 PK	74.00	-10.20	1.61 V	209	30.34	33.46
4	2483.50	49.20 AV	54.00	-4.80	1.61 V	209	15.74	33.46
5	4924.00	47.31 PK	74.00	-26.69	1.00 V	360	7.95	39.35
6	4924.00	34.68 AV	54.00	-19.32	1.00 V	360	-4.68	39.35

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

DRAFT 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH 1000hPa	TEST MODE	A
TESTED BY	Antony Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.66 PK	74.00	-3.34	1.33 H	282	37.33	33.33
2	2390.00	52.73 AV	54.00	-1.27	1.33 H	282	19.40	33.33
3	*2412.00	110.89 PK			1.31 H	288	77.48	33.41
4	*2412.00	100.27 AV			1.31 H	288	66.86	33.41
5	4824.00	47.93 PK	74.00	-26.07	1.33 H	360	8.17	39.76
6	4824.00	35.18 AV	54.00	-18.82	1.33 H	360	-4.58	39.76
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.76 PK	74.00	-10.24	1.66 V	360	30.43	33.33
2	2390.00	48.98 AV	54.00	-5.02	1.66 V	360	15.65	33.33
3	*2412.00	103.54 PK			1.66 V	360	70.13	33.41
4	*2412.00	92.93 AV			1.66 V	360	59.52	33.41
5	4824.00	48.39 PK	74.00	-25.61	1.10 V	360	8.63	39.76
6	4824.00	35.86 AV	54.00	-18.14	1.10 V	360	-3.90	39.76

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH 1000hPa	TEST MODE	A
TESTED BY	Antony Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.12 PK	74.00	-11.88	1.28 H	285	28.79	33.33
2	2390.00	50.97 AV	54.00	-3.03	1.28 H	285	17.64	33.33
3	*2437.00	113.99 PK			1.28 H	285	80.50	33.49
4	*2437.00	103.68 AV			1.28 H	285	70.19	33.49
5	2483.50	65.50 PK	74.00	-8.50	1.28 H	285	31.86	33.64
6	2483.50	52.14 AV	54.00	-1.86	1.28 H	285	18.50	33.64
7	4874.00	47.82 PK	74.00	-26.18	1.28 H	360	7.94	39.88
8	4874.00	34.99 AV	54.00	-19.01	1.28 H	360	-4.89	39.88
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	105.80 PK			1.63 V	360	72.31	33.49
2	*2437.00	95.55 AV			1.63 V	360	62.06	33.49
3	4874.00	48.00 PK	74.00	-26.00	1.10 V	0	8.12	39.88
4	4874.00	35.19 AV	54.00	-18.81	1.10 V	0	-4.69	39.88

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH 1000hPa	TEST MODE	A
TESTED BY	Antony Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.51 PK			1.26 H	285	76.94	33.57
2	*2462.00	99.99 AV			1.26 H	285	66.42	33.57
3	2483.50	65.64 PK	74.00	-8.36	1.25 H	285	32.00	33.64
4	2483.50	51.08 AV	54.00	-2.92	1.25 H	285	17.44	33.64
5	4924.00	47.99 PK	74.00	-26.01	1.25 H	360	7.95	40.03
6	4924.00	35.63 AV	54.00	-18.37	1.25 H	360	-4.41	40.03
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.49 PK			1.66 V	360	68.92	33.57
2	*2462.00	91.71 AV			1.66 V	360	58.14	33.57
3	2483.50	58.72 PK	74.00	-15.28	1.66 V	360	25.08	33.64
4	2483.50	47.95 AV	54.00	-6.05	1.66 V	360	14.31	33.64
5	4924.00	47.69 PK	74.00	-26.31	1.00 V	0	7.65	40.03
6	4924.00	35.26 AV	54.00	-18.74	1.00 V	0	-4.78	40.03

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH 1000hPa	TEST MODE	B
TESTED BY	Antony Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.15 PK	74.00	-6.85	1.34 H	310	34.07	33.08
2	2390.00	51.45 AV	54.00	-2.55	1.34 H	310	18.37	33.08
3	*2412.00	110.65 PK			1.38 H	340	77.47	33.18
4	*2412.00	100.21 AV			1.38 H	340	67.03	33.18
5	4824.00	47.22 PK	74.00	-26.78	1.30 H	360	8.07	39.15
6	4824.00	33.69 AV	54.00	-20.31	1.30 H	360	-5.46	39.15
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.26 PK	74.00	-11.74	1.64 V	250	29.18	33.08
2	2390.00	47.79 AV	54.00	-6.21	1.64 V	250	14.71	33.08
3	*2412.00	102.04 PK			1.64 V	250	68.86	33.18
4	*2412.00	91.72 AV			1.64 V	250	58.54	33.18
5	4824.00	47.08 PK	74.00	-26.92	1.10 V	180	7.93	39.15
6	4824.00	34.28 AV	54.00	-19.72	1.10 V	180	-4.87	39.15

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH 1000hPa	TEST MODE	B
TESTED BY	Antony Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.08 PK	74.00	-9.92	1.34 H	304	31.00	33.08
2	2390.00	50.95 AV	54.00	-3.05	1.34 H	304	17.87	33.08
3	*2437.00	113.78 PK			1.30 H	309	80.50	33.28
4	*2437.00	103.48 AV			1.30 H	309	70.20	33.28
5	2483.50	65.47 PK	74.00	-8.53	1.27 H	309	32.01	33.46
6	2483.50	52.09 AV	54.00	-1.91	1.27 H	309	18.63	33.46
7	4874.00	47.74 PK	74.00	-26.26	1.34 H	360	8.59	39.14
8	4874.00	34.79 AV	54.00	-19.21	1.34 H	360	-4.36	39.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	105.55 PK			1.66 V	255	72.27	33.28
2	*2437.00	95.20 AV			1.66 V	255	61.92	33.28
3	4874.00	46.74 PK	74.00	-27.26	1.10 V	0	7.59	39.14
4	4874.00	34.20 AV	54.00	-19.80	1.10 V	0	-4.95	39.14

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH 1000hPa	TEST MODE	B
TESTED BY	Antony Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.18 PK			1.29 H	301	76.80	33.38
2	*2462.00	99.78 AV			1.29 H	301	66.40	33.38
3	2483.50	62.93 PK	74.00	-11.07	1.29 H	301	29.47	33.46
4	2483.50	50.99 AV	54.00	-3.01	1.29 H	301	17.53	33.46
5	4924.00	46.79 PK	74.00	-27.21	1.25 H	360	7.43	39.35
6	4924.00	34.22 AV	54.00	-19.78	1.25 H	360	-5.14	39.35
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.44 PK			1.25 V	114	69.06	33.38
2	*2462.00	91.92 AV			1.25 V	114	58.54	33.38
3	2483.50	59.65 PK	74.00	-14.35	1.25 V	114	26.19	33.46
4	2483.50	48.52 AV	54.00	-5.48	1.25 V	114	15.06	33.46
5	4924.00	46.79 PK	74.00	-27.21	1.25 V	360	7.43	39.35
6	4924.00	34.22 AV	54.00	-19.78	1.25 V	360	-5.14	39.35

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

DRAFT 802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH 1000hPa	TEST MODE	A
TESTED BY	Antony Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.54 PK	74.00	-6.46	1.30 H	286	34.21	33.33
2	2390.00	52.74 AV	54.00	-1.26	1.30 H	286	19.41	33.33
3	*2422.00	107.75 PK			1.26 H	285	74.31	33.44
4	*2422.00	97.67 AV			1.26 H	285	64.23	33.44
5	4844.00	47.95 PK	74.00	-26.05	1.00 H	180	8.15	39.81
6	4844.00	34.57 AV	54.00	-19.43	1.00 H	180	-5.23	39.81
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.49 PK	74.00	-16.51	1.67 V	360	24.16	33.33
2	2390.00	48.12 AV	54.00	-5.88	1.67 V	360	14.79	33.33
3	*2422.00	100.08 PK			1.67 V	360	66.64	33.44
4	*2422.00	89.49 AV			1.67 V	360	56.05	33.44
5	4844.00	48.08 PK	74.00	-25.92	1.20 V	180	8.28	39.81
6	4844.00	35.11 AV	54.00	-18.89	1.20 V	180	-4.69	39.81

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH 1000hPa	TEST MODE	A
TESTED BY	Antony Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.59 PK	74.00	-12.41	1.00 H	284	28.26	33.33
2	2390.00	49.18 AV	54.00	-4.82	1.00 H	284	15.85	33.33
3	*2437.00	107.01 PK			1.26 H	282	73.52	33.49
4	*2437.00	96.83 AV			1.26 H	282	63.34	33.49
5	2483.50	64.67 PK	74.00	-9.33	1.25 H	284	31.03	33.64
6	2483.50	51.16 AV	54.00	-2.84	1.25 H	284	17.52	33.64
7	4874.00	48.47 PK	74.00	-25.53	1.20 H	360	8.59	39.88
8	4874.00	34.99 AV	54.00	-19.01	1.20 H	360	-4.89	39.88
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	100.78 PK			1.63 V	360	67.29	33.49
2	*2437.00	90.75 AV			1.63 V	360	57.26	33.49
3	4874.00	47.52 PK	74.00	-26.48	1.20 V	0	7.64	39.88
4	4874.00	34.82 AV	54.00	-19.18	1.20 V	0	-5.06	39.88

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH 1000hPa	TEST MODE	A
TESTED BY	Antony Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	106.43 PK			1.25 H	283	72.89	33.54
2	*2452.00	96.22 AV			1.25 H	283	62.68	33.54
3	2483.50	64.68 PK	74.00	-9.32	1.26 H	285	31.04	33.64
4	2483.50	52.55 AV	54.00	-1.45	1.26 H	285	18.91	33.64
5	4904.00	47.62 PK	74.00	-26.38	1.20 H	360	7.66	39.96
6	4904.00	35.08 AV	54.00	-18.92	1.20 H	360	-4.88	39.96
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	99.35 PK			1.65 V	360	65.81	33.54
2	*2452.00	88.88 AV			1.65 V	360	55.34	33.54
3	2483.50	58.90 PK	74.00	-15.10	1.65 V	360	25.26	33.64
4	2483.50	48.05 AV	54.00	-5.95	1.65 V	360	14.41	33.64
5	4904.00	47.28 PK	74.00	-26.72	1.00 V	180	7.32	39.96
6	4904.00	34.93 AV	54.00	-19.07	1.00 V	180	-5.03	39.96

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH 1000hPa	TEST MODE	B
TESTED BY	Antony Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.18 PK	74.00	-9.82	1.32 H	307	31.10	33.08
2	2390.00	52.01 AV	54.00	-1.99	1.32 H	307	18.93	33.08
3	*2422.00	107.10 PK			1.31 H	309	73.88	33.22
4	*2422.00	96.90 AV			1.31 H	309	63.68	33.22
5	4844.00	47.32 PK	74.00	-26.68	1.32 H	360	8.18	39.15
6	4844.00	34.31 AV	54.00	-19.69	1.32 H	360	-4.83	39.15
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.73 PK	74.00	-16.27	1.01 V	113	24.65	33.08
2	2390.00	47.55 AV	54.00	-6.45	1.01 V	113	14.47	33.08
3	*2422.00	99.42 PK			1.01 V	113	66.20	33.22
4	*2422.00	89.12 AV			1.01 V	113	55.90	33.22
5	4844.00	46.10 PK	74.00	-27.90	1.00 V	0	6.96	39.15
6	4844.00	34.20 AV	54.00	-19.80	1.00 V	0	-4.94	39.15

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH 1000hPa	TEST MODE	B
TESTED BY	Antony Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.29 PK	74.00	-14.71	1.28 H	306	26.21	33.08
2	2390.00	48.60 AV	54.00	-5.40	1.28 H	306	15.52	33.08
3	*2437.00	106.61 PK			1.28 H	303	73.33	33.28
4	*2437.00	96.30 AV			1.28 H	303	63.02	33.28
5	2483.50	63.13 PK	74.00	-10.87	1.25 H	307	29.67	33.46
6	2483.50	50.20 AV	54.00	-3.80	1.25 H	307	16.74	33.46
7	4874.00	47.47 PK	74.00	-26.53	1.25 H	360	8.32	39.14
8	4874.00	34.36 AV	54.00	-19.64	1.25 H	360	-4.79	39.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	100.19 PK			1.02 V	120	66.91	33.28
2	*2437.00	90.05 AV			1.02 V	120	56.77	33.28
3	4874.00	46.79 PK	74.00	-27.21	1.02 V	0	7.64	39.14
4	4874.00	34.11 AV	54.00	-19.89	1.02 V	0	-5.04	39.14

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH 1000hPa	TEST MODE	B
TESTED BY	Antony Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	106.04 PK			1.28 H	307	72.70	33.34
2	*2452.00	95.20 AV			1.28 H	307	61.86	33.34
3	2483.50	63.97 PK	74.00	-10.03	1.25 H	308	30.51	33.46
4	2483.50	51.56 AV	54.00	-2.44	1.25 H	308	18.10	33.46
5	4904.00	47.78 PK	74.00	-26.22	1.25 H	360	8.60	39.18
6	4904.00	34.67 AV	54.00	-19.33	1.25 H	360	-4.51	39.18
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	99.29 PK			1.01 V	118	65.95	33.34
2	*2452.00	89.03 AV			1.01 V	118	55.69	33.34
3	2483.50	60.96 PK	74.00	-13.04	1.01 V	118	27.50	33.46
4	2483.50	49.20 AV	54.00	-4.80	1.01 V	118	15.74	33.46
5	4904.00	46.84 PK	74.00	-27.16	1.10 V	0	7.66	39.18
6	4904.00	34.13 AV	54.00	-19.87	1.10 V	0	-5.05	39.18

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.

BELOW 1GHz WORST-CASE DATA : DRAFT 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH 999hPa	TEST MODE	A
TESTED BY	Antony Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	121.28	32.91 QP	43.50	-10.59	1.50 H	145	20.74	12.17
2	181.55	31.03 QP	43.50	-12.47	1.50 H	109	18.47	12.56
3	259.33	35.28 QP	46.00	-10.72	1.25 H	148	21.39	13.90
4	615.13	35.11 QP	46.00	-10.89	1.00 H	94	11.67	23.44
5	638.46	36.18 QP	46.00	-9.82	1.00 H	148	12.25	23.93
6	708.46	38.94 QP	46.00	-7.06	1.25 H	181	13.60	25.34
7	832.89	38.50 QP	46.00	-7.50	1.50 H	148	11.52	26.99
8	951.49	35.00 QP	46.00	-11.00	1.25 H	193	6.31	28.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	117.39	30.96 QP	43.50	-12.54	1.25 V	226	19.15	11.81
2	167.94	33.16 QP	43.50	-10.34	1.00 V	91	19.33	13.83
3	455.70	34.91 QP	46.00	-11.09	1.00 V	127	15.75	19.16
4	613.19	33.48 QP	46.00	-12.52	1.25 V	178	10.09	23.40
5	638.46	34.96 QP	46.00	-11.04	2.00 V	118	11.03	23.93
6	710.40	33.85 QP	46.00	-12.15	1.50 V	328	8.49	25.36
7	755.12	36.65 QP	46.00	-9.35	1.25 V	163	10.74	25.92
8	951.49	37.27 QP	46.00	-8.73	1.00 V	217	8.58	28.70

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH 999hPa	TEST MODE	B
TESTED BY	Antony Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	105.73	34.17 QP	43.50	-9.33	1.50 H	211	23.62	10.55
2	129.06	28.65 QP	43.50	-14.85	2.50 H	58	16.02	12.63
3	177.67	31.46 QP	43.50	-12.04	2.50 H	106	18.42	13.04
4	216.55	34.28 QP	46.00	-11.72	1.00 H	238	22.19	12.09
5	257.38	34.40 QP	46.00	-11.60	1.00 H	76	20.55	13.86
6	488.75	39.00 QP	46.00	-7.00	2.00 H	184	18.85	20.15
7	620.96	33.30 QP	46.00	-12.70	1.00 H	118	9.73	23.56
8	638.46	37.13 QP	46.00	-8.87	1.00 H	157	13.20	23.93
9	665.68	37.85 QP	46.00	-8.15	1.00 H	193	13.35	24.50
10	797.89	32.32 QP	46.00	-13.68	1.50 H	154	5.96	26.36
11	949.55	33.21 QP	46.00	-12.79	1.00 H	82	4.55	28.67
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	115.45	31.10 QP	43.50	-12.40	1.00 V	211	19.50	11.60
2	175.72	29.79 QP	43.50	-13.71	1.00 V	142	16.43	13.35
3	267.10	35.21 QP	46.00	-10.79	1.50 V	127	21.15	14.05
4	356.54	34.18 QP	46.00	-11.82	1.25 V	181	17.97	16.22
5	455.70	32.09 QP	46.00	-13.91	1.25 V	205	12.93	19.16
6	638.46	36.20 QP	46.00	-9.80	1.00 V	64	12.27	23.93
7	809.56	35.90 QP	46.00	-10.10	1.25 V	190	9.34	26.56
8	864.00	32.67 QP	46.00	-13.33	1.00 V	139	5.15	27.52
9	951.49	37.09 QP	46.00	-8.91	1.00 V	7	8.40	28.70

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Sep. 22, 2008	Sep. 21, 2009
RF signal cable Woken	5D-FB	Cable-HYCO2-01	Jan. 04, 2008	Jan. 03, 2009
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Jan. 10, 2008	Jan. 09, 2009
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Jul. 30, 2008	Jul. 29, 2009
Software ADT	ADT_Cond_ V7.3.6	NA	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2.
 3. The VCCI Site Registration No. is C-2047.

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

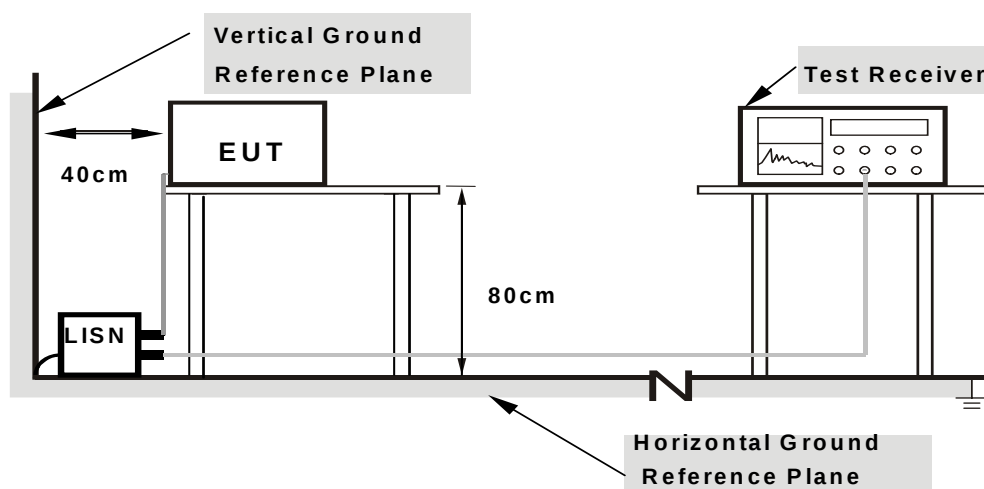

Note: 1.Support units were connected to second LISN.
 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80
 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.


4.2.7 TEST RESULTS

CONDUCTED WORST-CASE DATA: DRAFT 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg. C, 66%RH, 1016hPa
TEST MODE	A	TESTED BY	Antony Lee

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.205	0.13	49.13	-	49.26	-	63.42	53.42	-14.16	-
2	0.314	0.14	36.03	-	36.17	-	59.86	49.86	-23.70	-
3	0.513	0.15	28.58	-	28.73	-	56.00	46.00	-27.27	-
4	2.105	0.27	25.95	-	26.22	-	56.00	46.00	-29.78	-
5	10.438	0.64	33.68	-	34.32	-	60.00	50.00	-25.68	-
6	15.438	0.91	29.71	-	30.62	-	60.00	50.00	-29.38	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

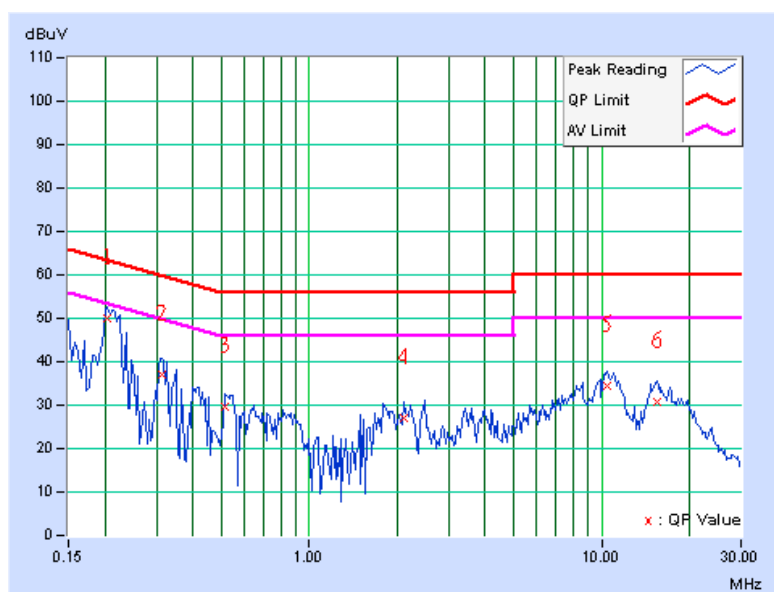

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg. C, 66%RH, 1016hPa
TEST MODE	A	TESTED BY	Antony Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.213	0.14	48.95	-	49.09	-	63.11	53.11	-14.02	-
2	0.318	0.15	35.18	-	35.33	-	59.76	49.76	-24.43	-
3	0.689	0.16	27.55	-	27.71	-	56.00	46.00	-28.29	-
4	2.047	0.26	26.20	-	26.46	-	56.00	46.00	-29.54	-
5	10.355	0.58	33.85	-	34.43	-	60.00	50.00	-25.57	-
6	15.430	0.74	29.10	-	29.84	-	60.00	50.00	-30.16	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

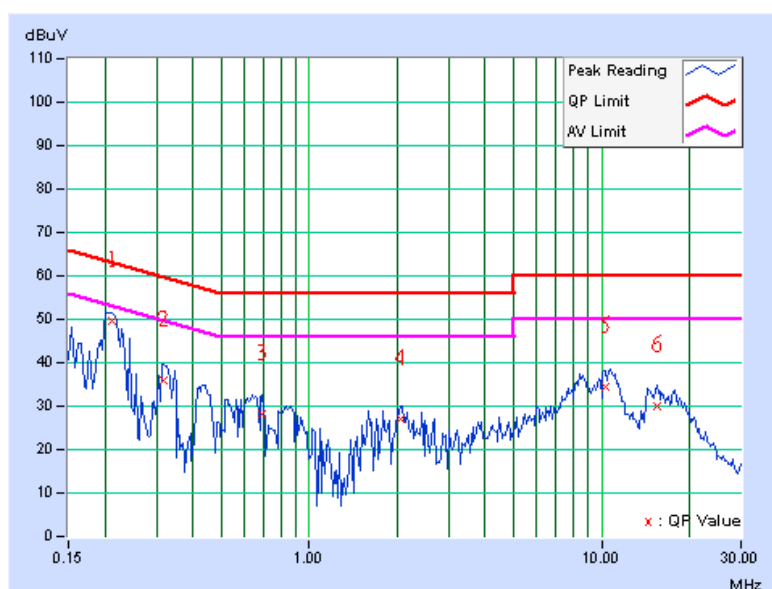

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg. C, 66%RH, 1016hPa
TEST MODE	B	TESTED BY	Antony Lee

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.13	46.82	-	46.95	-	64.61	54.61	-17.66	-
2	0.259	0.13	37.17	-	37.30	-	61.45	51.45	-24.15	-
3	0.361	0.14	36.01	-	36.15	-	58.71	48.71	-22.56	-
4	1.844	0.25	25.02	-	25.27	-	56.00	46.00	-30.73	-
5	10.359	0.64	32.92	-	33.56	-	60.00	50.00	-26.44	-
6	14.695	0.85	29.82	-	30.67	-	60.00	50.00	-29.33	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

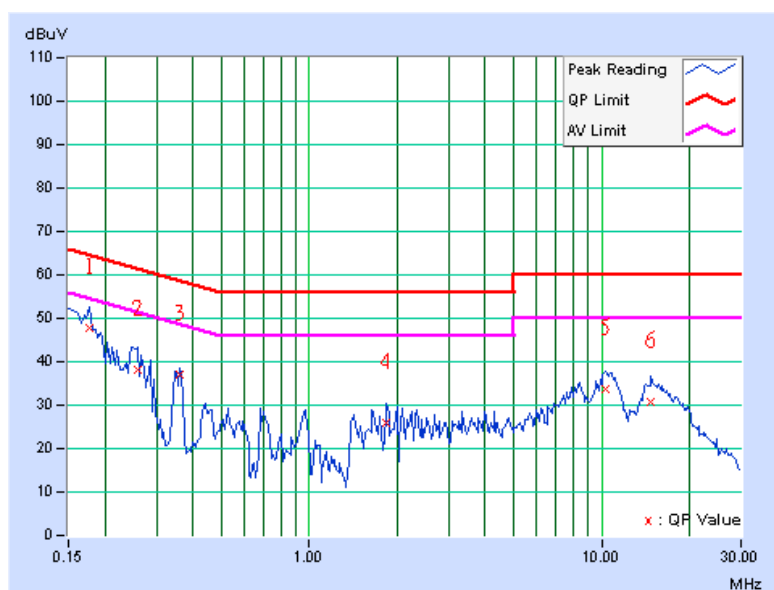

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg. C, 66%RH, 1016hPa
TEST MODE	B	TESTED BY	Antony Lee

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.14	45.67	-	45.81	-	64.61	54.61	-18.80	-
2	0.228	0.14	37.07	-	37.21	-	62.52	52.52	-25.31	-
3	0.252	0.14	40.57	-	40.71	-	61.71	51.71	-20.99	-
4	0.356	0.15	33.80	-	33.95	-	58.83	48.83	-24.88	-
5	0.963	0.18	25.03	-	25.21	-	56.00	46.00	-30.79	-
6	10.465	0.58	32.74	-	33.32	-	60.00	50.00	-26.68	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

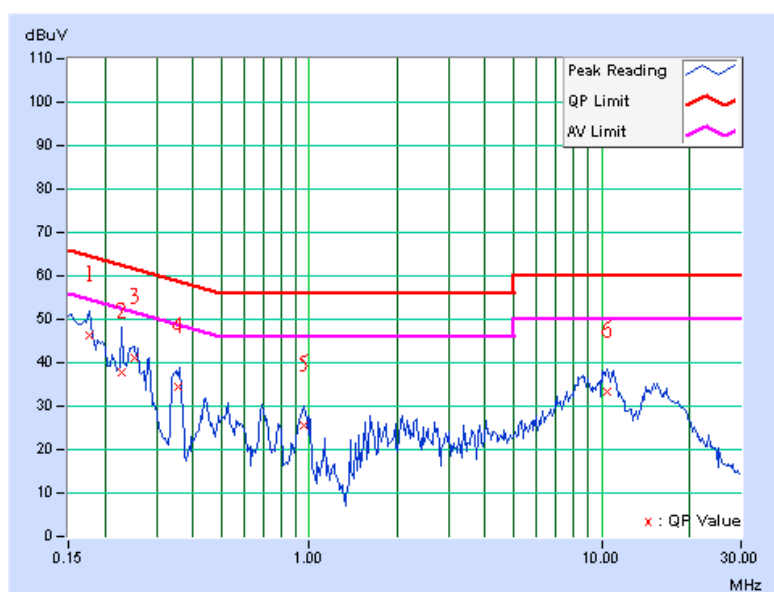

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100041	Apr. 22, 2008	Apr. 21, 2009

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.7 TEST RESULTS

802.11b DSSS MODULATION


MODULATION TYPE	DBPSK	TRANSFER RATE	1.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
TEST MODE	A	TESTED BY	Brad Wu

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	10.10	0.5	PASS
6	2437	10.11	0.5	PASS
11	2462	10.11	0.5	PASS


CH 1

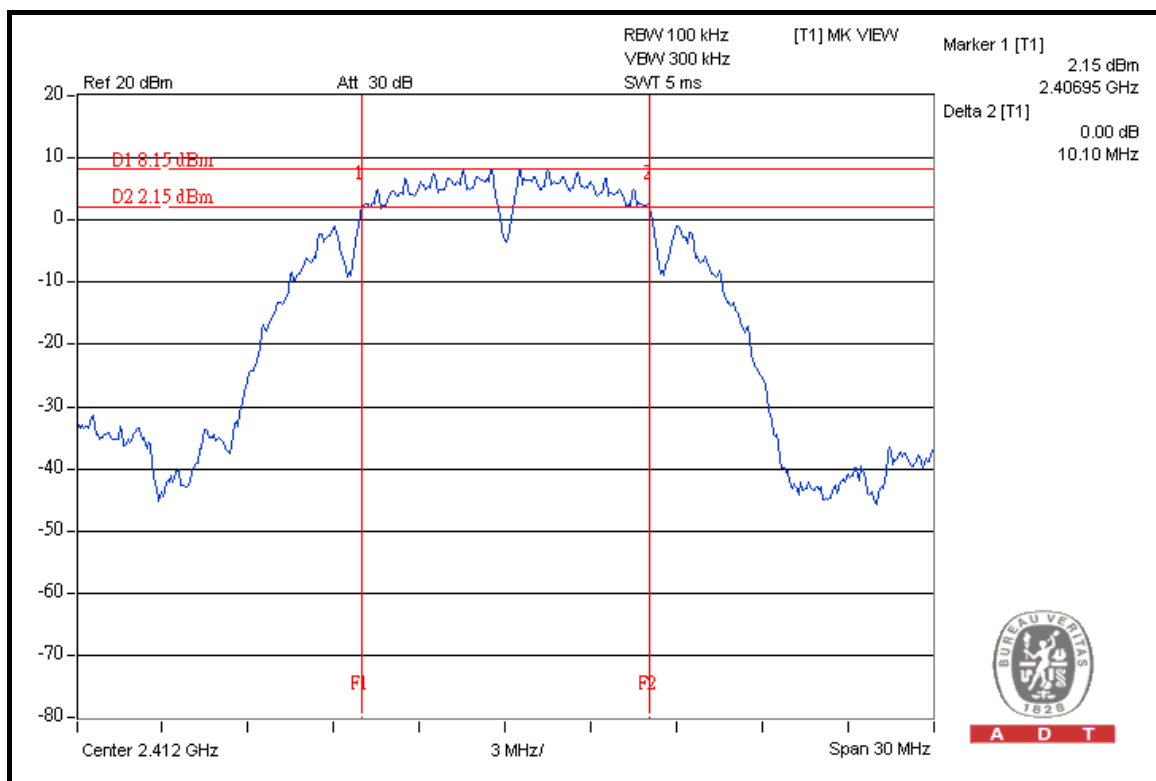

CH 6

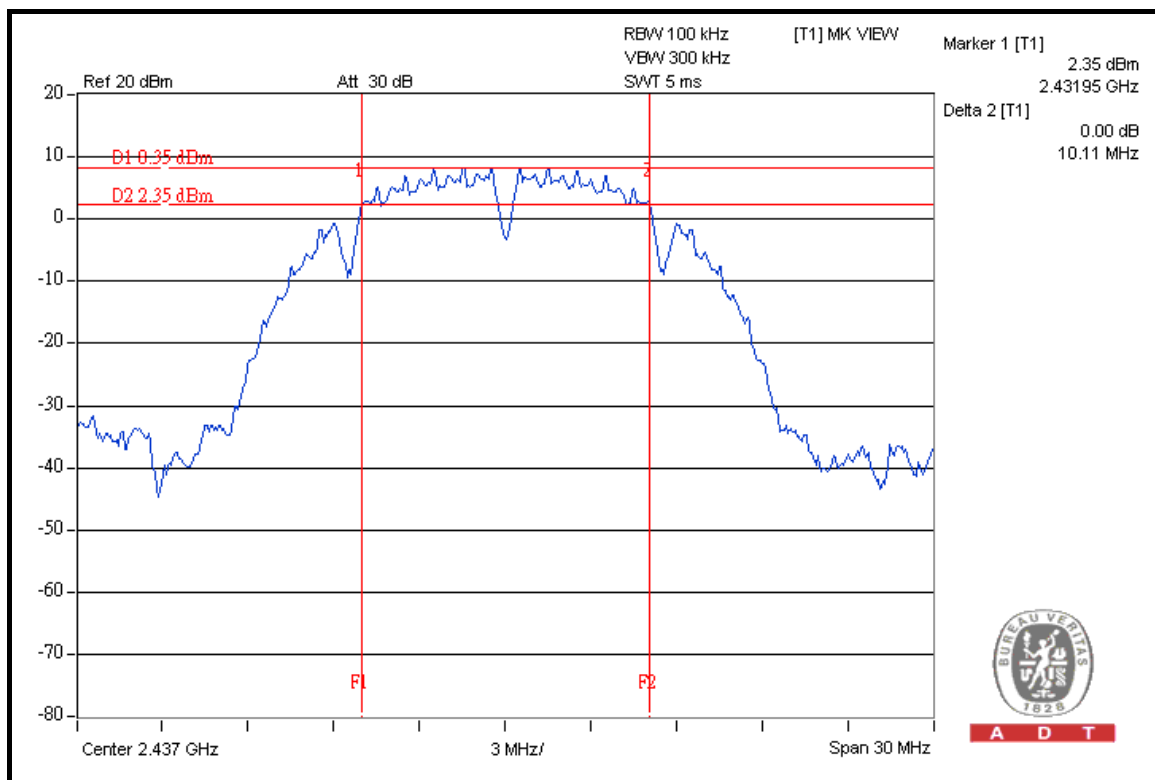


CH 11

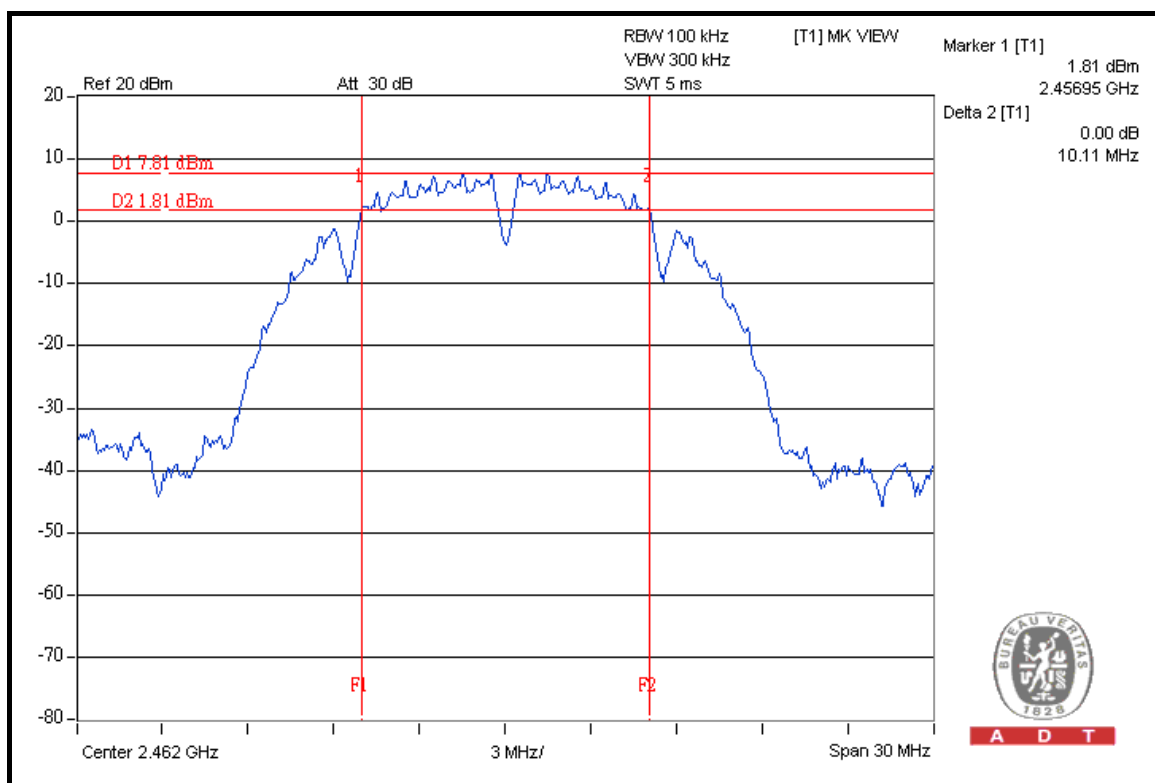

MODULATION TYPE	DBPSK	TRANSFER RATE	1.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
TEST MODE	B	TESTED BY	Brad Wu

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	10.10	0.5	PASS
6	2437	10.11	0.5	PASS
11	2462	10.10	0.5	PASS


CH 1

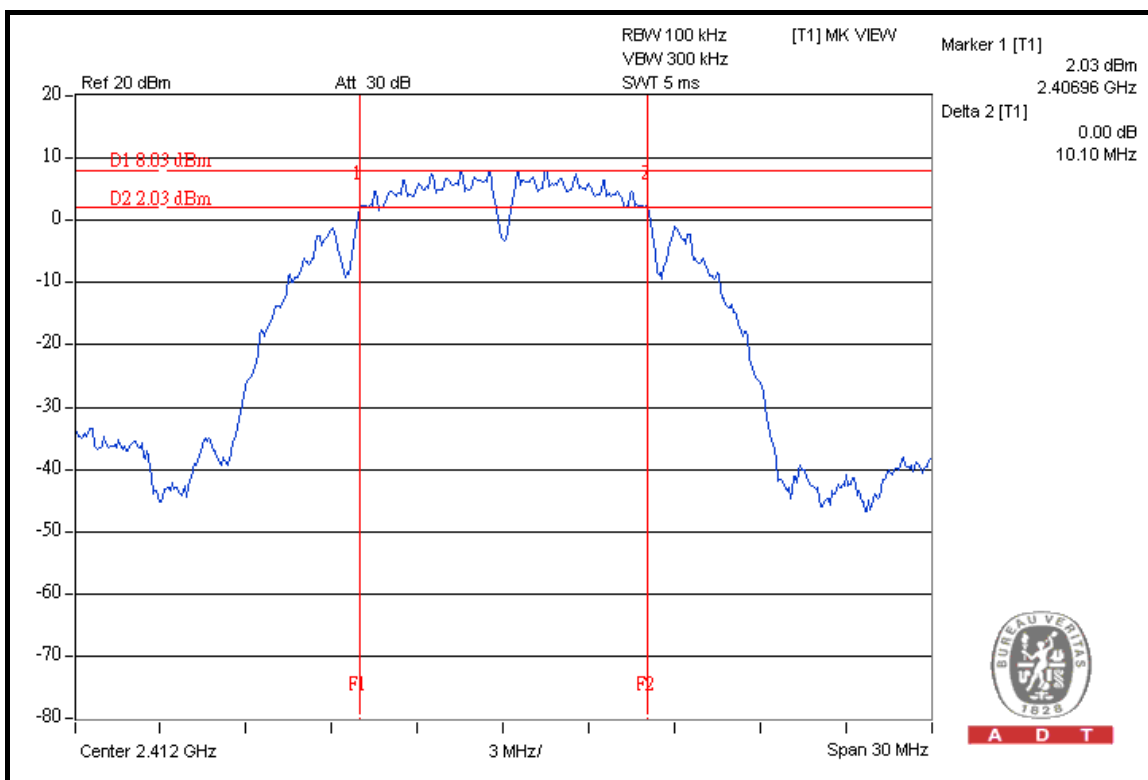




A D T

CH 6

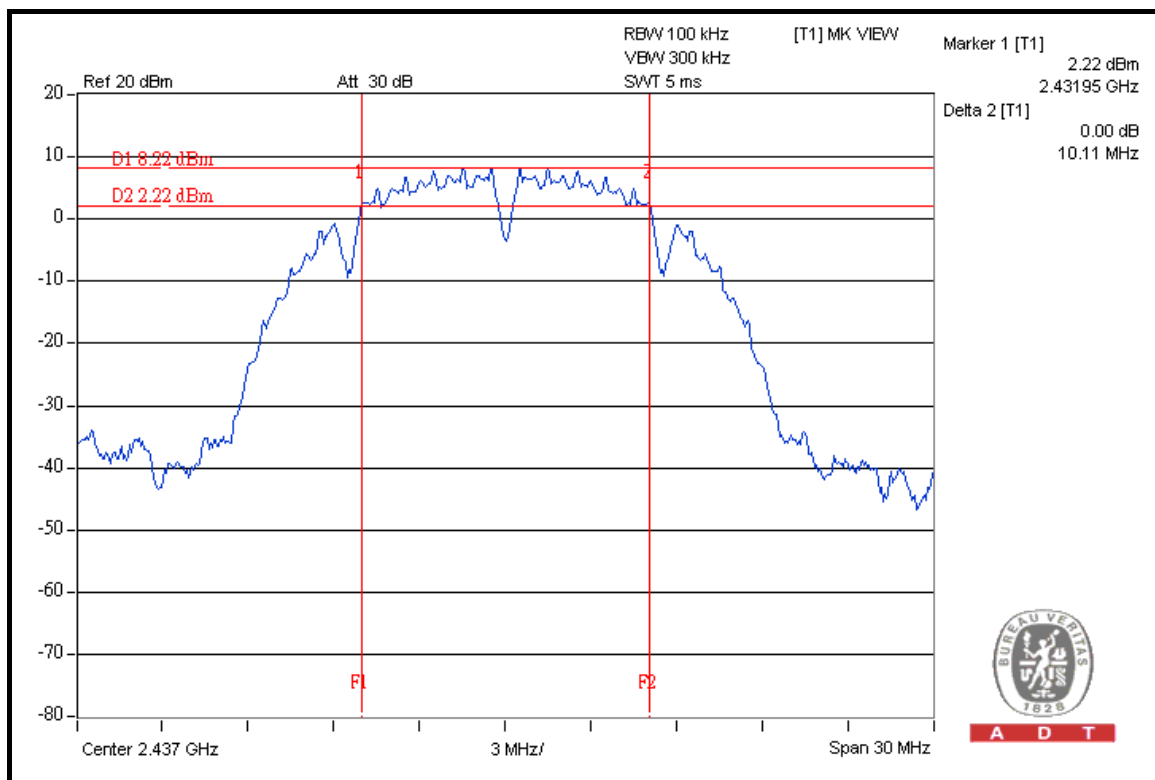

CH 11

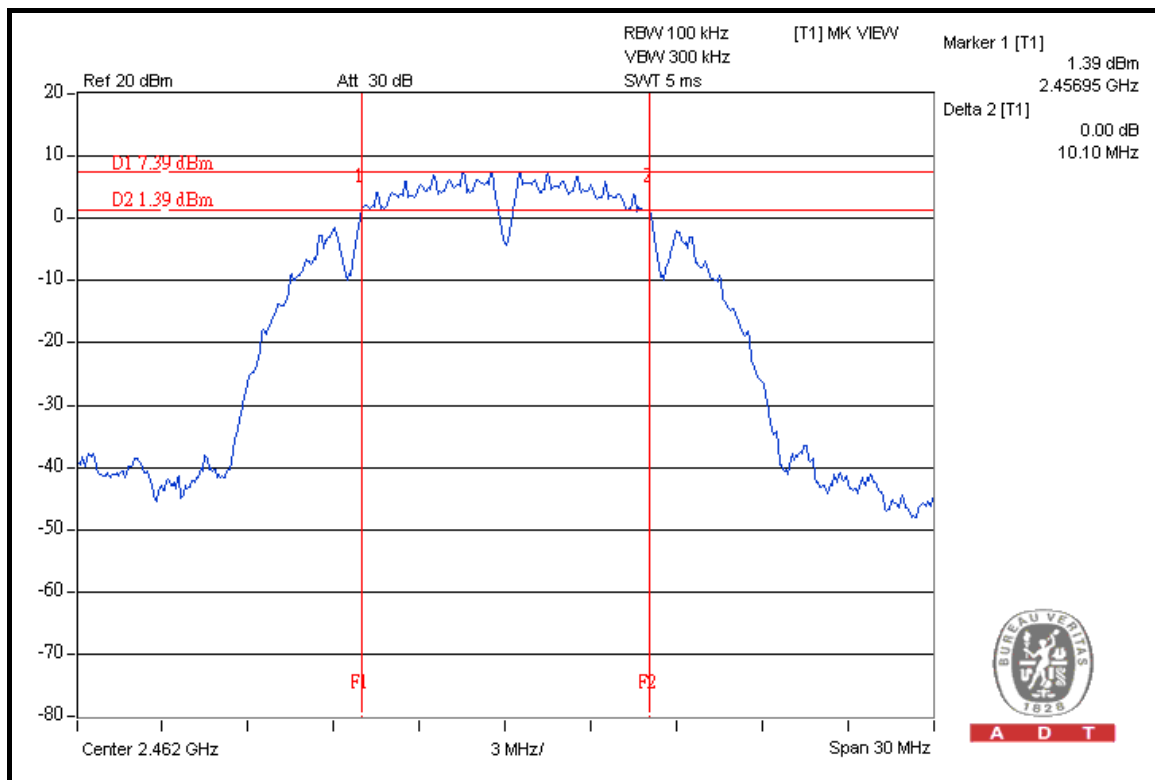


802.11g OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
TEST MODE	A	TESTED BY	Brad Wu

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.62	0.5	PASS
6	2437	16.62	0.5	PASS
11	2462	16.64	0.5	PASS


CH 1

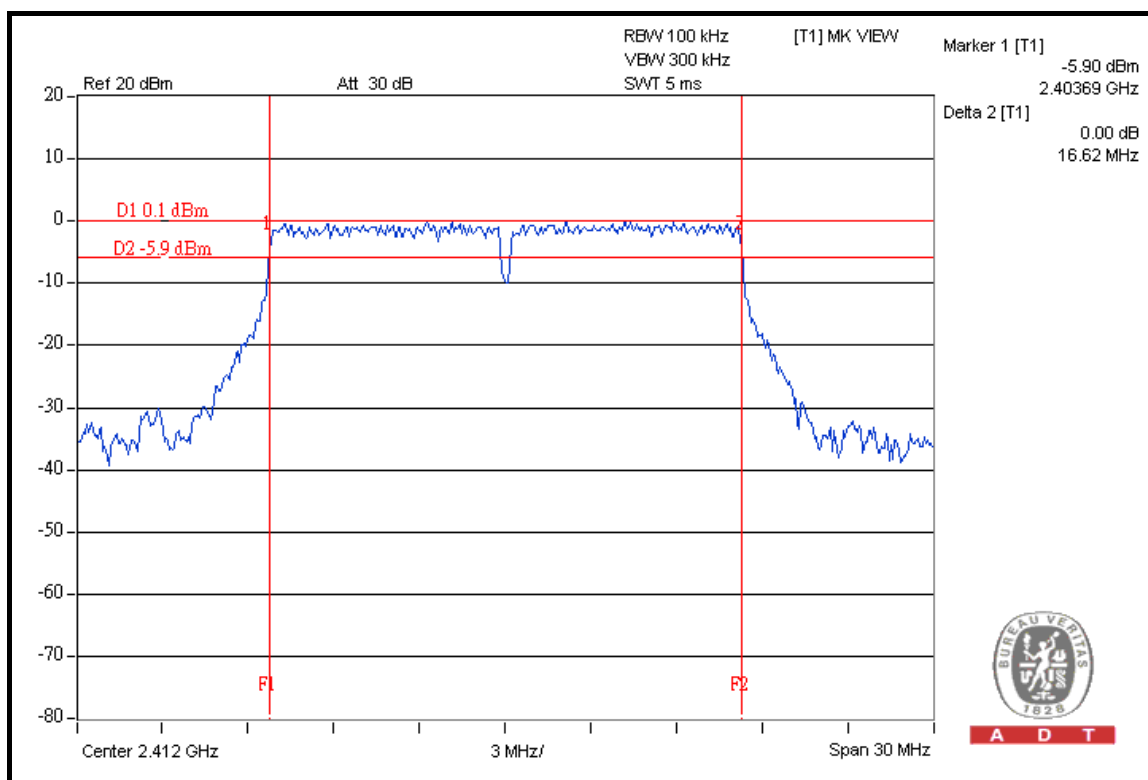




A D T

CH 6

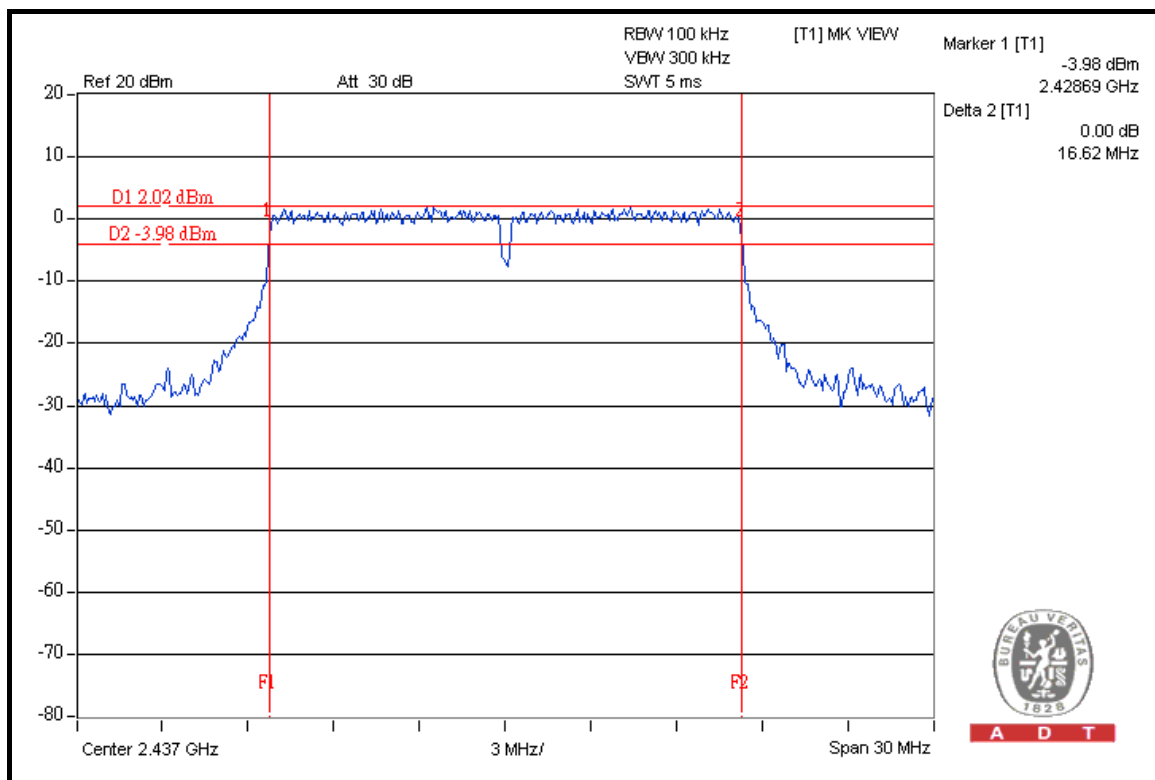


CH 11

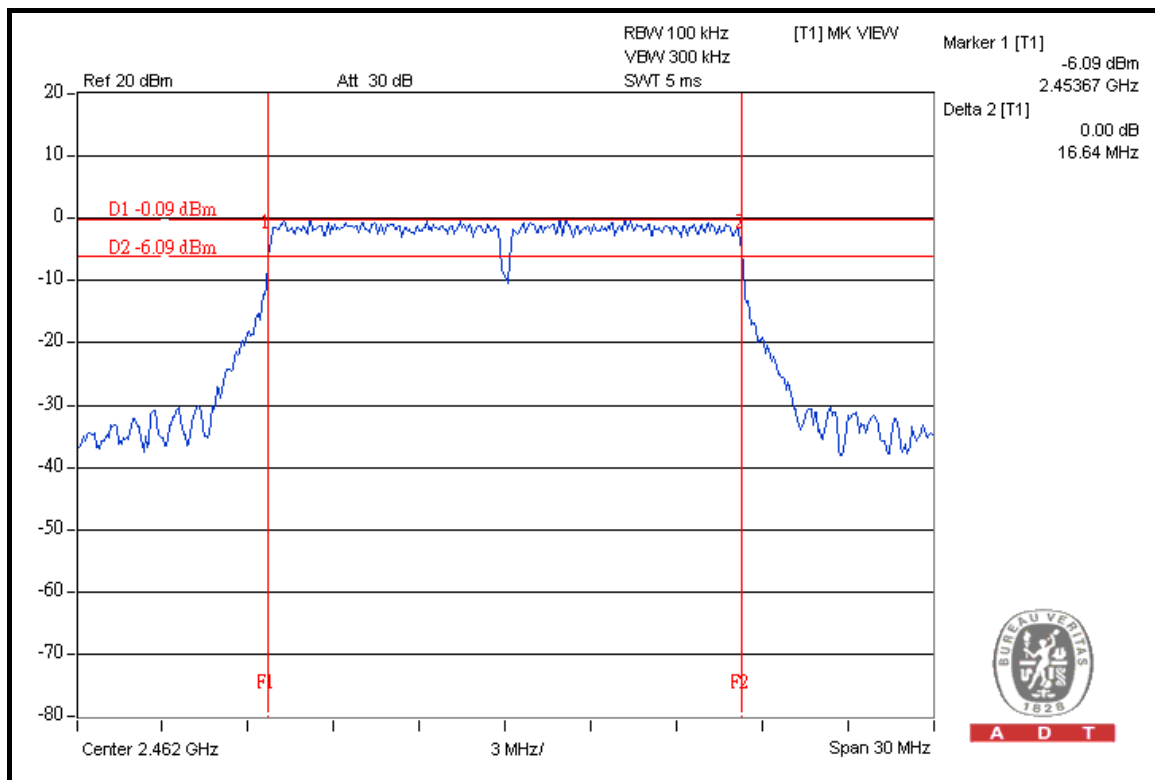

MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
TEST MODE	B	TESTED BY	Brad Wu

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.61	0.5	PASS
6	2437	16.65	0.5	PASS
11	2462	16.63	0.5	PASS


CH 1

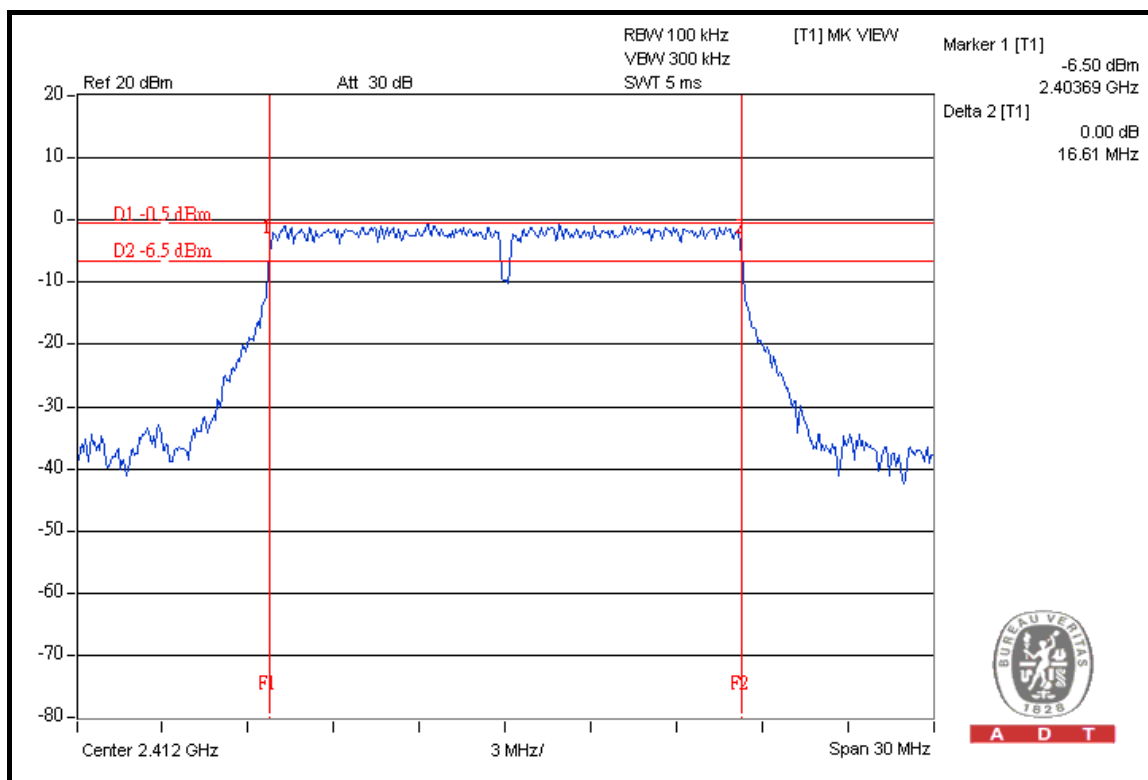




A D T

CH 6

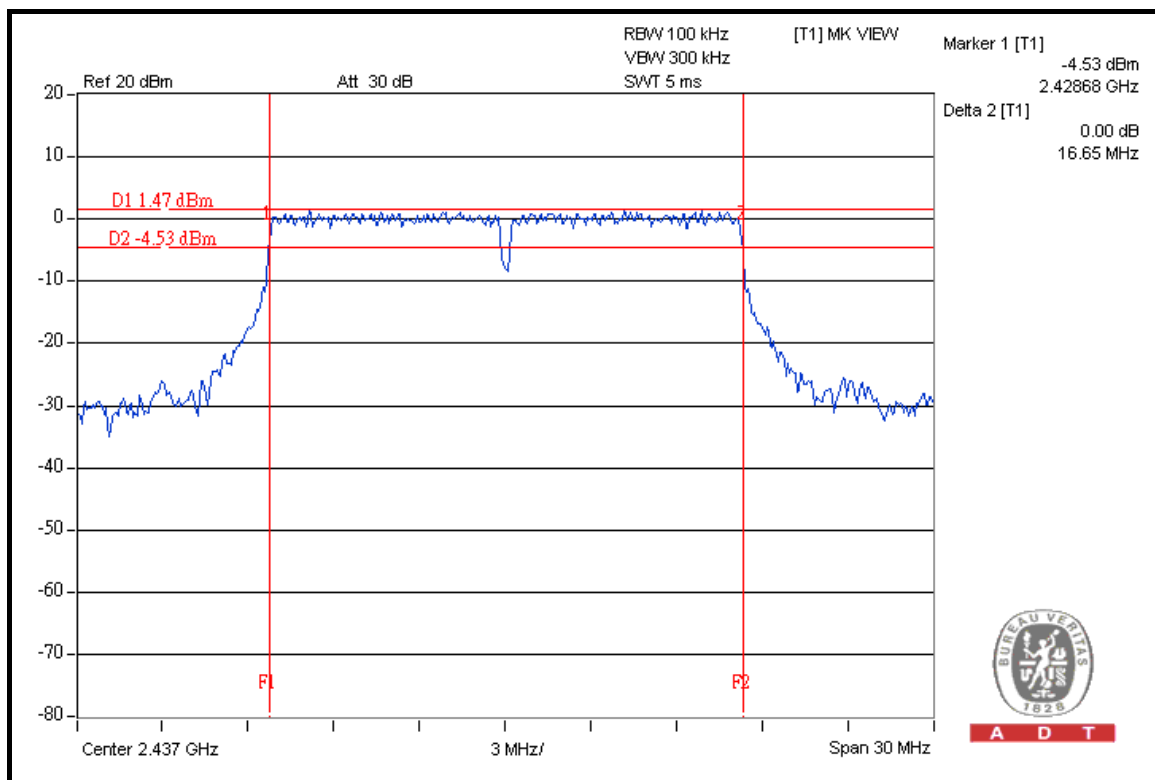

CH 11

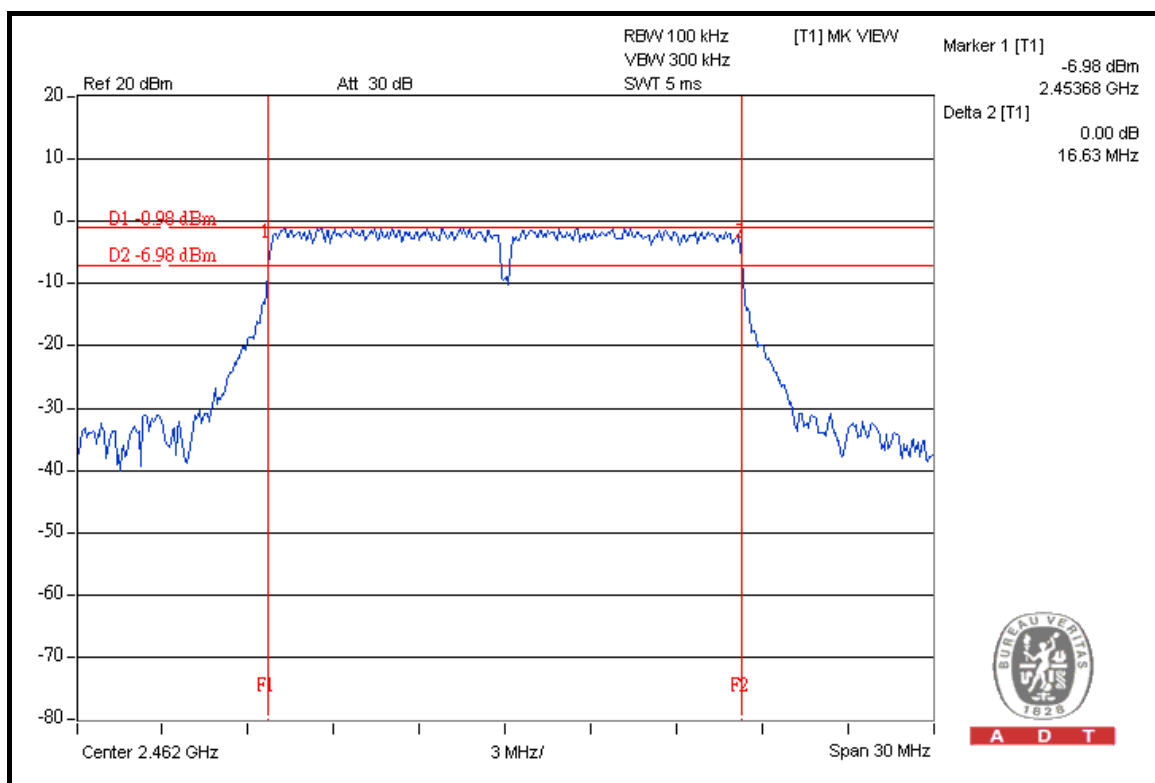


DRAFT 802.11n (20MHz) OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
TEST MODE	A	TESTED BY	Brad Wu

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.87	0.5	PASS
6	2437	17.90	0.5	PASS
11	2462	17.89	0.5	PASS


CH 1

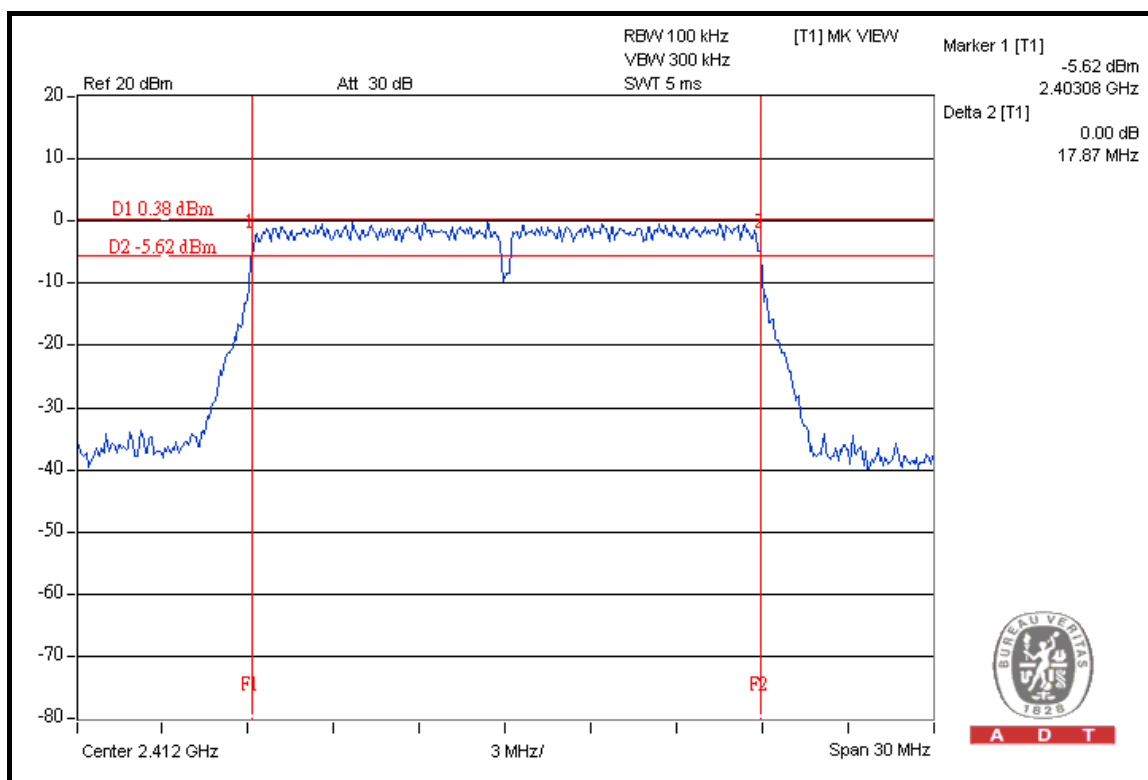




A D T

CH 6

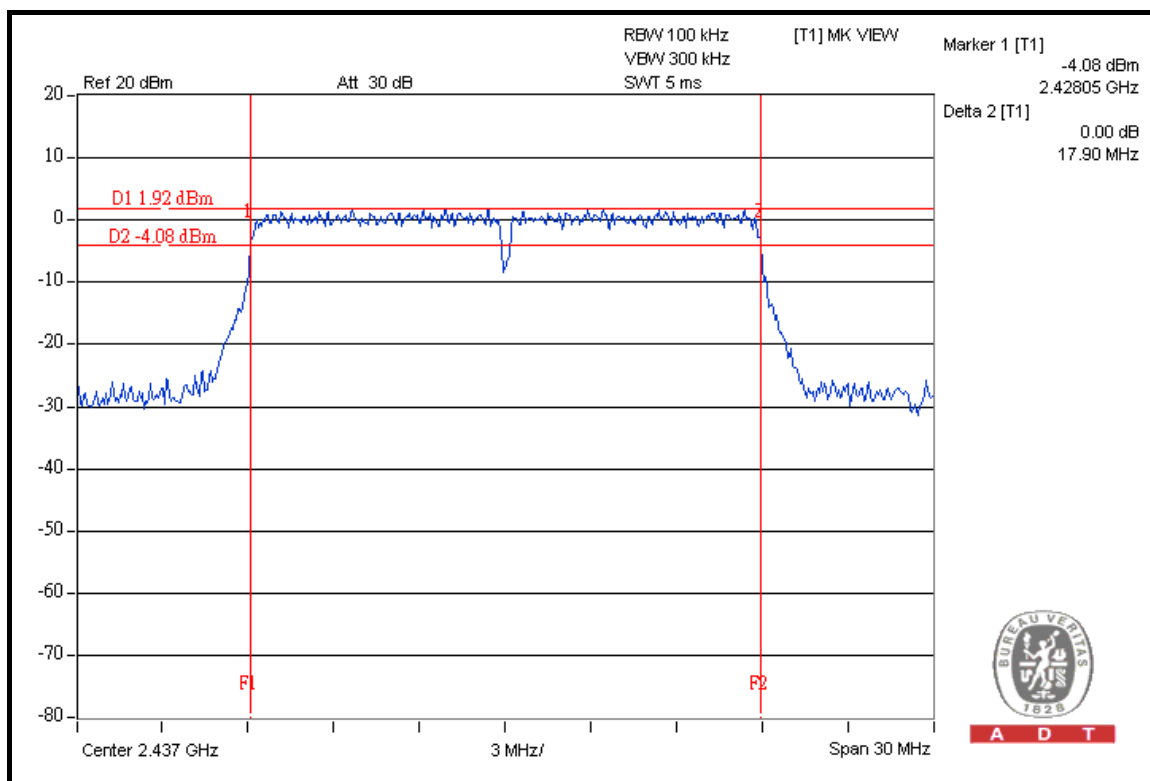


CH 11

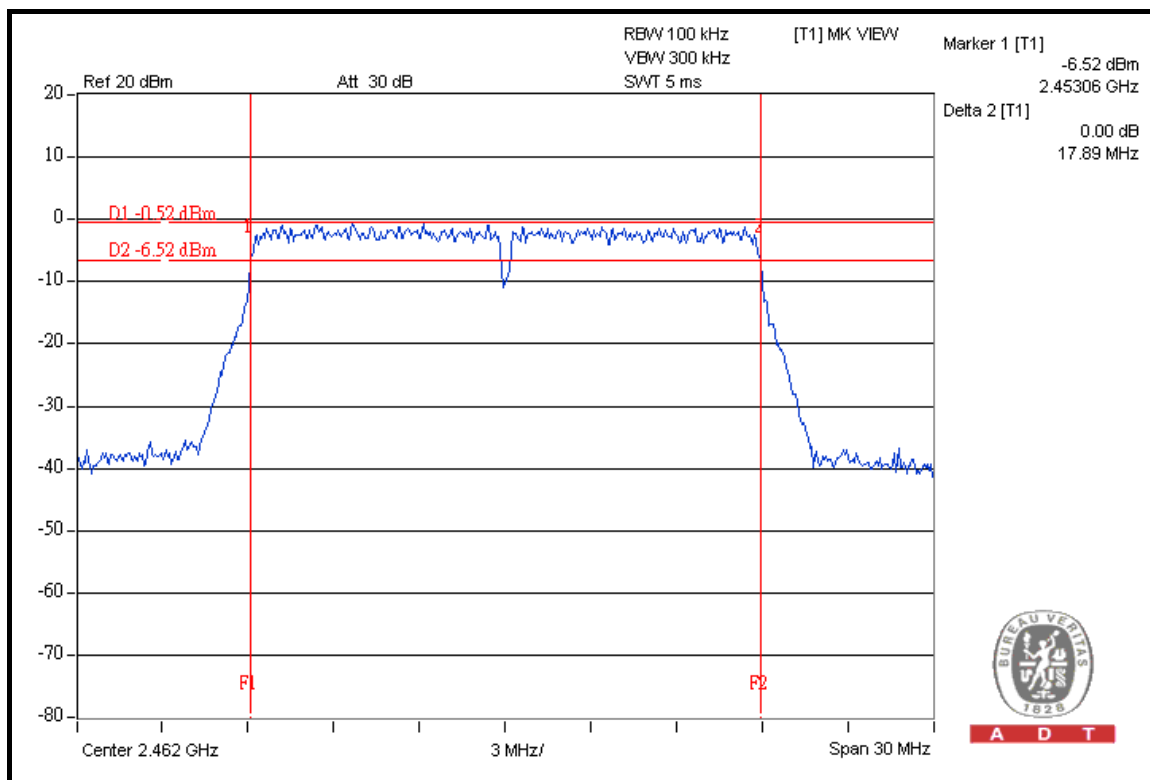


MODULATION TYPE	BPSK	TRANSFER RATE	6.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
TEST MODE	B	TESTED BY	Brad Wu

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.87	0.5	PASS
6	2437	17.89	0.5	PASS
11	2462	17.89	0.5	PASS


CH 1

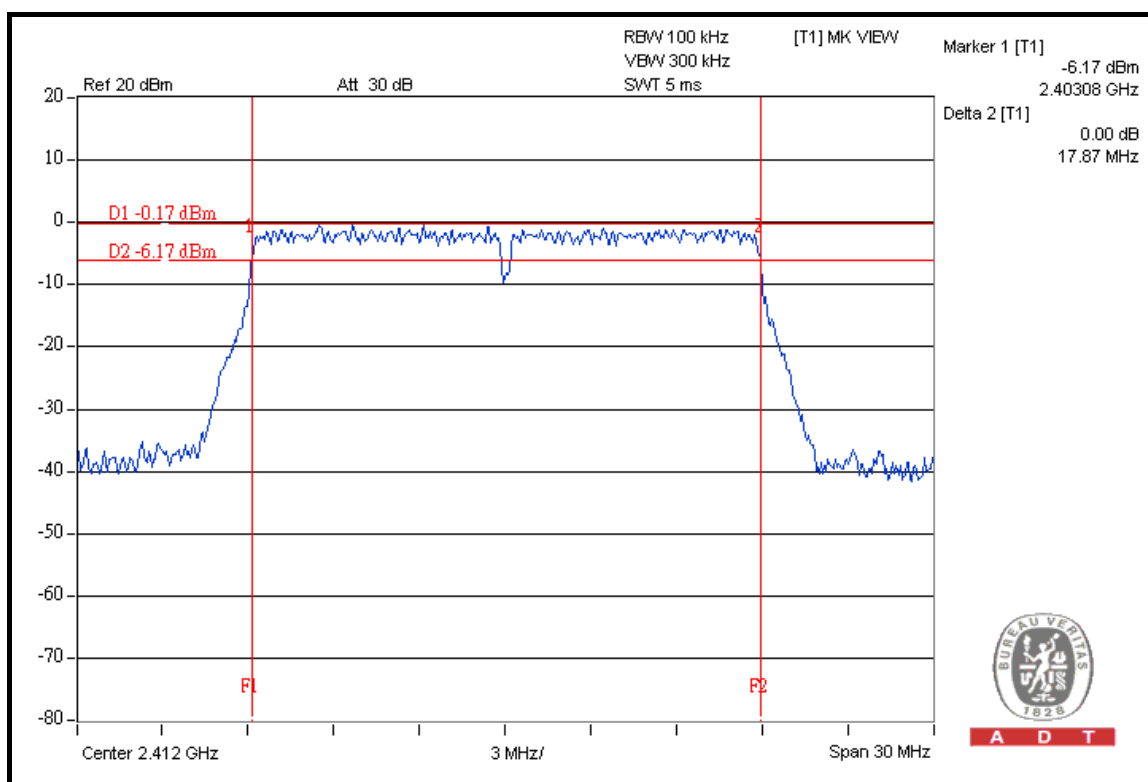

CH 6

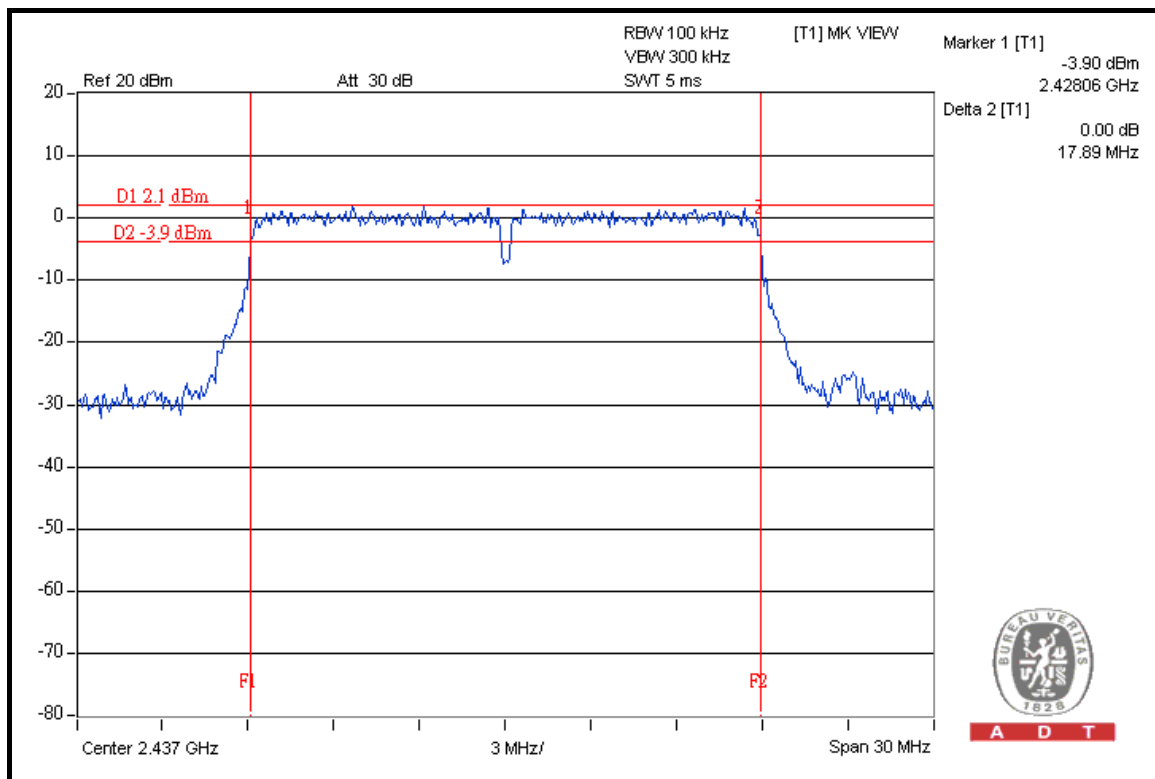

CH 11

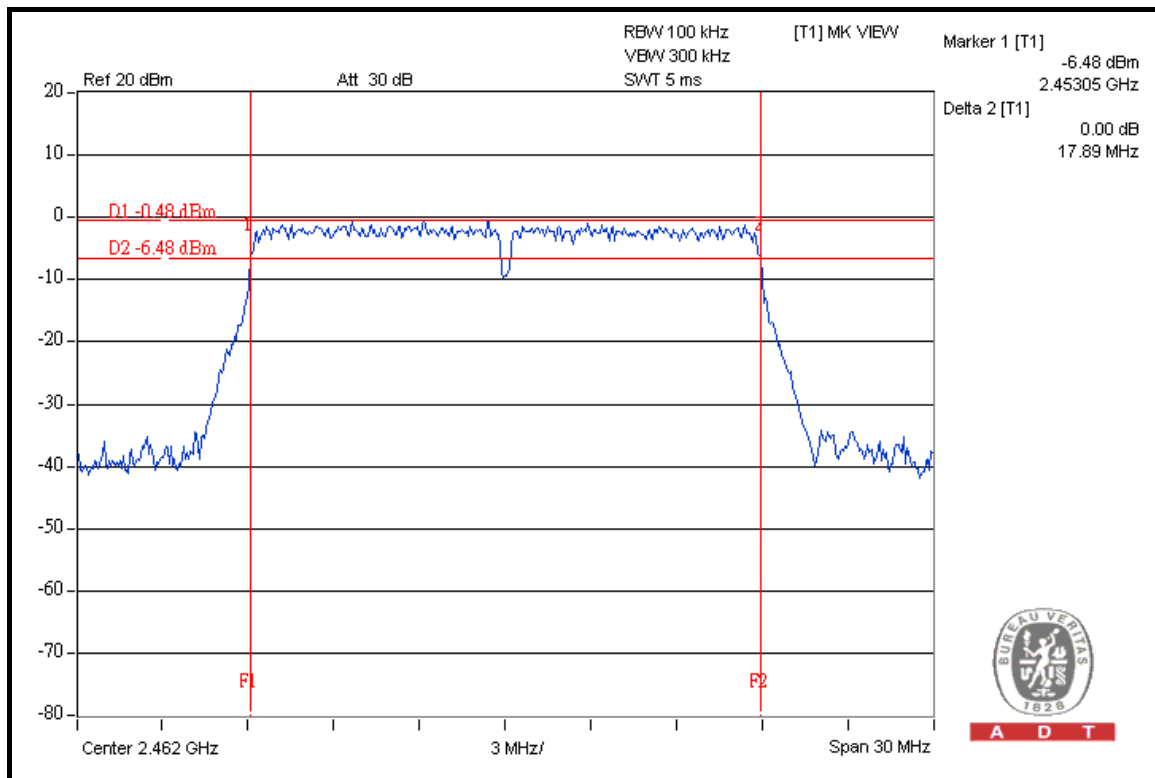


DRAFT 802.11n (40MHz) OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	15.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
TEST MODE	A	TESTED BY	Brad Wu

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2422	36.68	0.5	PASS
4	2437	36.72	0.5	PASS
7	2452	36.70	0.5	PASS


CH 1

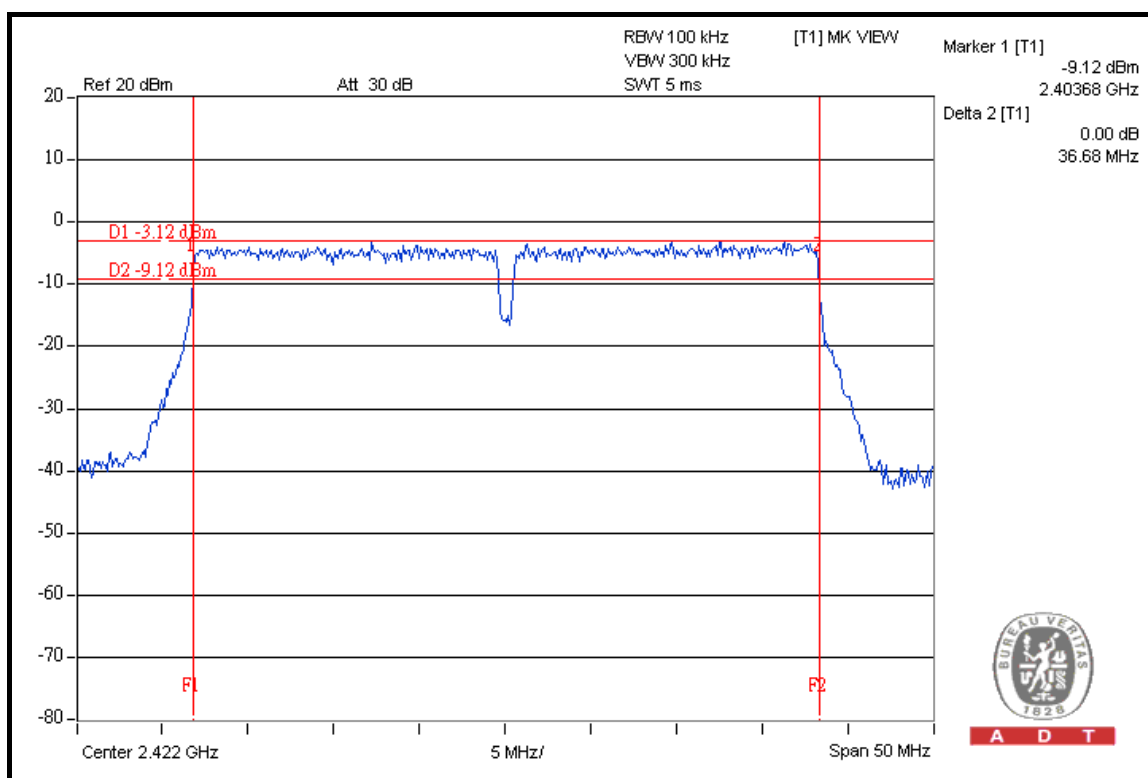




A D T

CH 4

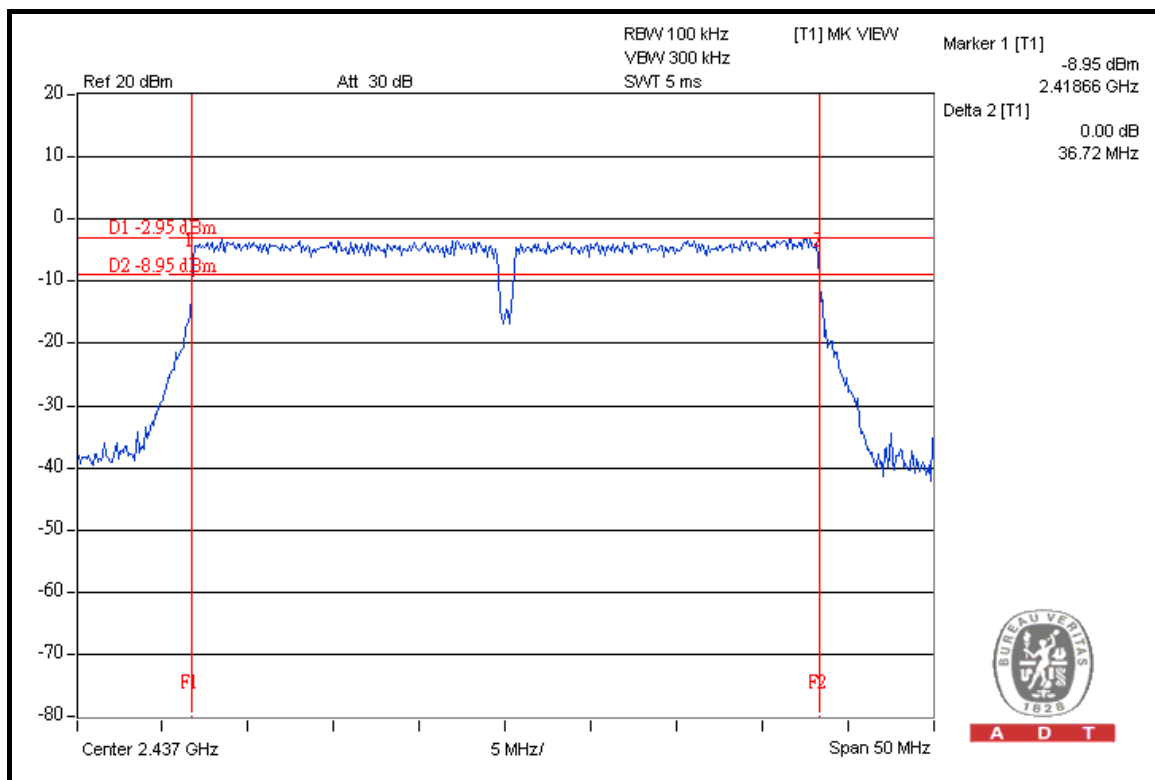

A D T

CH 7

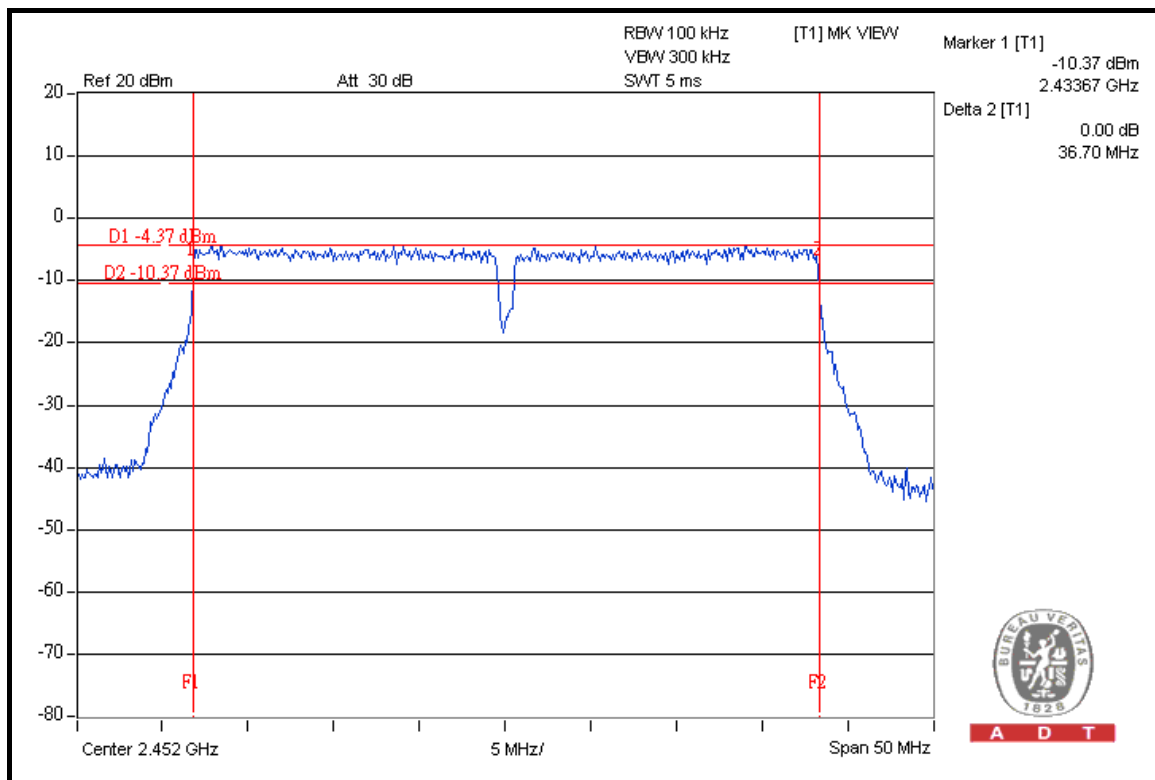

A D T




A D T

MODULATION TYPE	BPSK	TRANSFER RATE	15.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
TEST MODE	B	TESTED BY	Brad Wu

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2422	36.71	0.5	PASS
4	2437	36.73	0.5	PASS
7	2452	36.70	0.5	PASS

CH 1

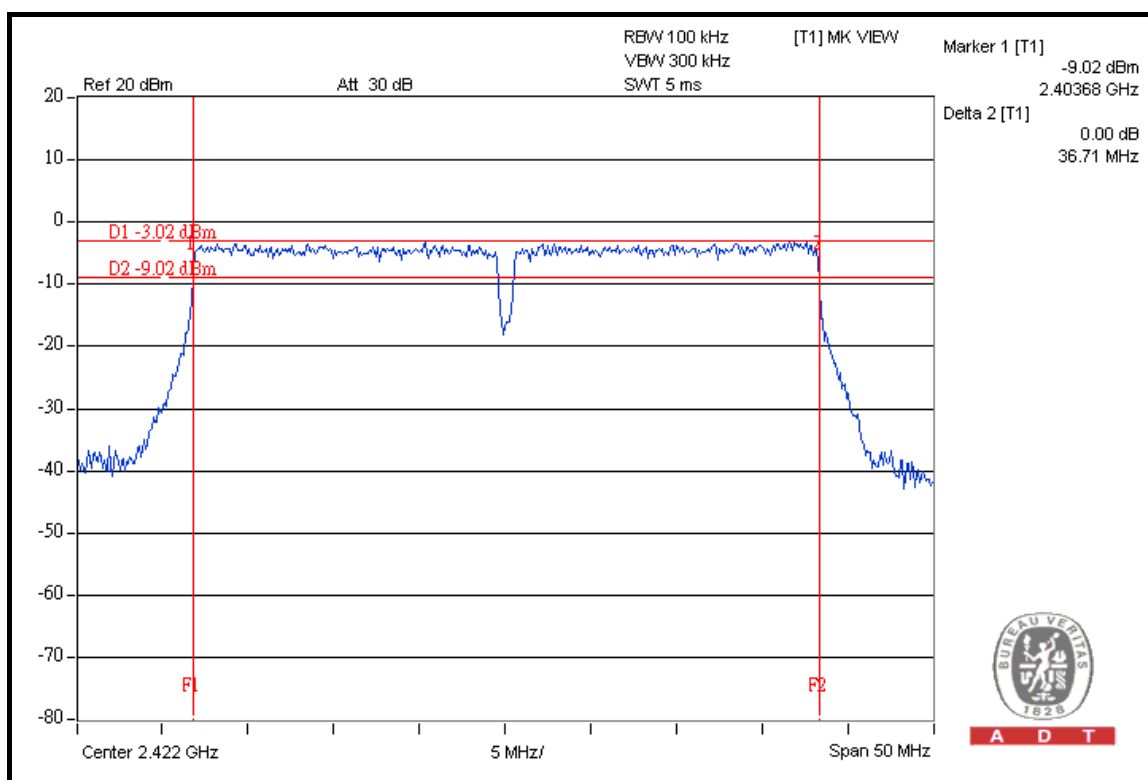


A D T




A D T

CH 4

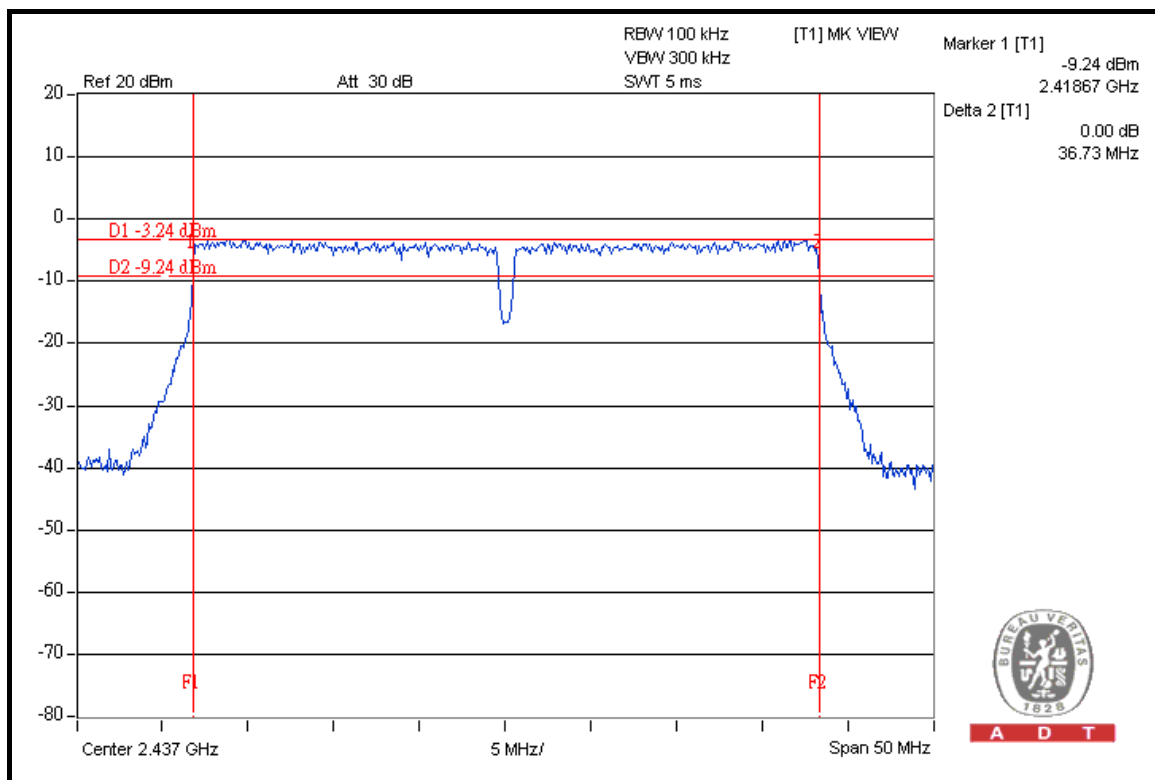

CH 7

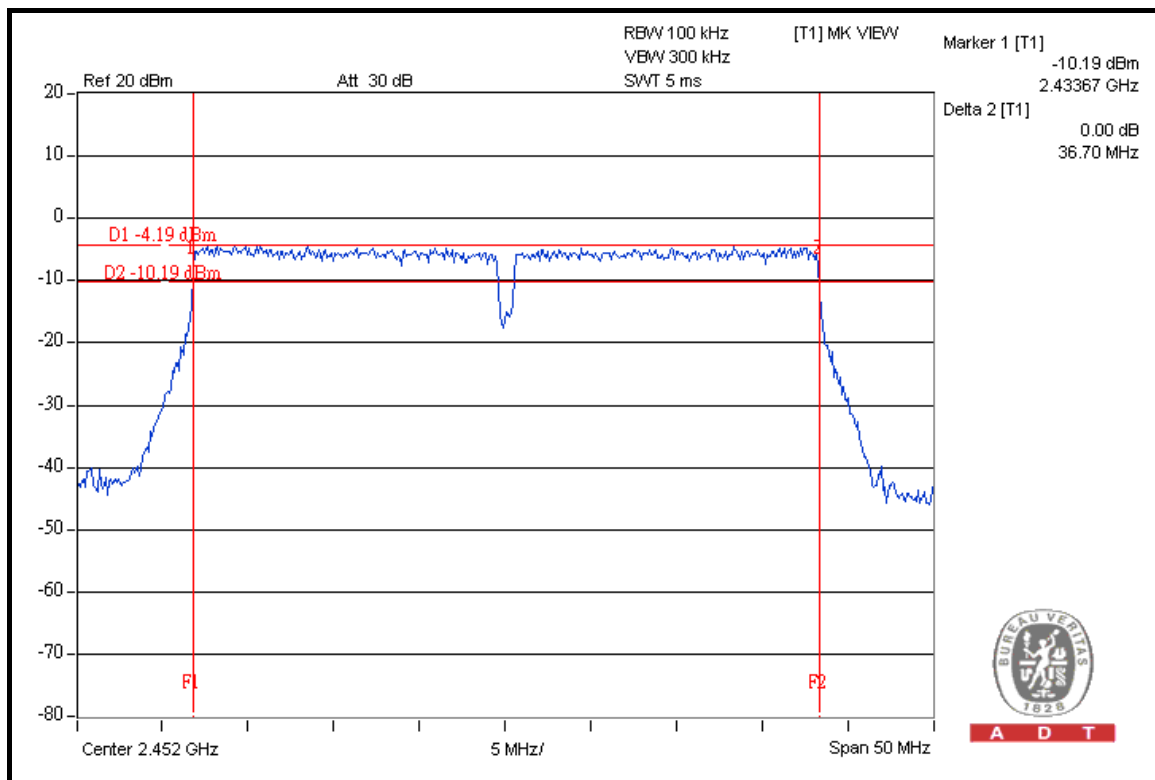

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	CALIBRATED UNTIL
High Speed Peak Power Meter	ML2495A	0824012	Aug. 04, 2008	Aug. 03, 2009
Power Sensor	MA2444B	0738138	Aug. 04, 2008	Aug. 03, 2009

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Measurement Bandwidth of ML2495A is 65MHz greater than 6dB bandwidth of emission.


4.4.3 TEST PROCEDURES

A power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP

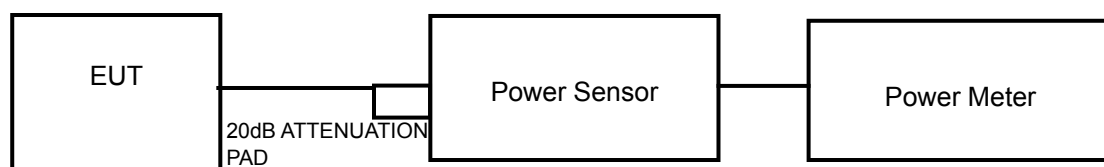

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.

4.4.7 TEST RESULTS

802.11b DSSS MODULATION

MODULATION TYPE	DBPSK	TRANSFER RATE	1.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
TESTED BY	Brad Wu		

CHAN	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	161.808	22.09	30	PASS
6	2437	159.956	22.04	30	PASS
11	2462	143.549	21.57	30	PASS

802.11g OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
TESTED BY	Brad Wu		

CHAN	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	233.346	23.68	30	PASS
6	2437	320.627	25.06	30	PASS
11	2462	179.473	22.54	30	PASS



A D T

DRAFT 802.11n (20MHz) OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
TESTED BY	Brad Wu		

CHAN	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	230.144	23.62	30	PASS
6	2437	322.849	25.09	30	PASS
11	2462	181.134	22.58	30	PASS

DRAFT 802.11n (40MHz) OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	15.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
TESTED BY	Brad Wu		

CHAN	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2422	283.792	24.53	30	PASS
4	2437	287.078	24.58	30	PASS
7	2452	227.510	23.57	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100041	Apr. 22, 2008	Apr. 21, 2009

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6.

802.11b DSSS MODULATION

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-9.99	8	PASS
6	2437	-9.87	8	PASS
11	2462	-10.41	8	PASS


Ref 20 dBm Att 30 dB RBW 3 kHz VBW 30 kHz SWT 500 s [T1] MK MAXH Marker 1 [T1] -9.99 dBm 2.412739 GHz

Center 2.41273 GHz 150 kHz/ Span 1.5 MHz




A D T

CH 6

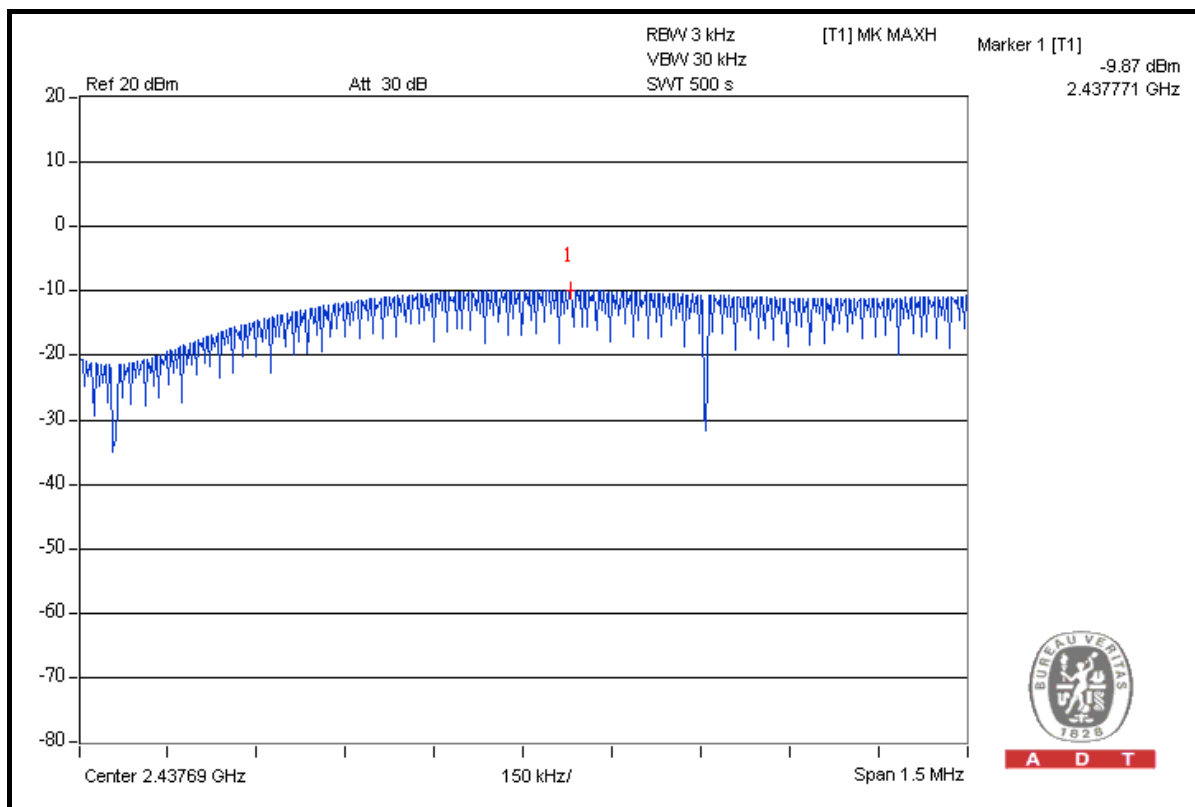

CH 11

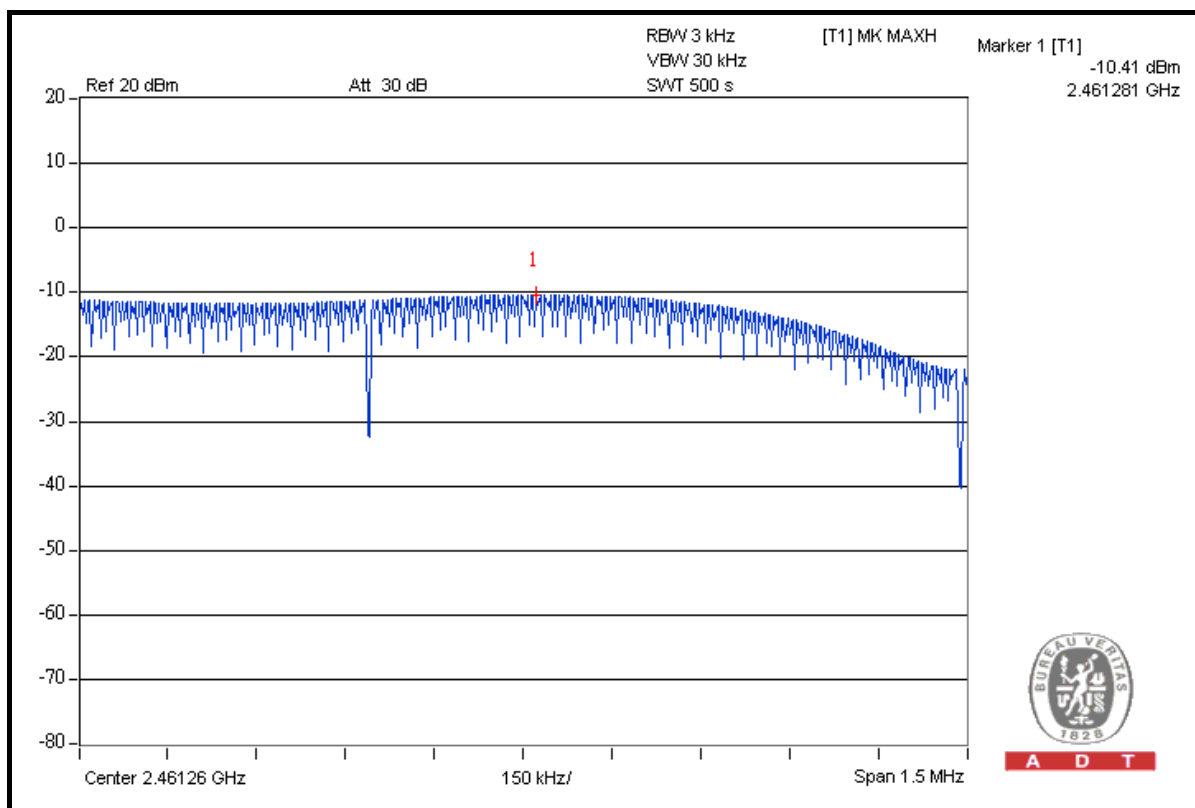




A D T

MODULATION TYPE	DBPSK	TRANSFER RATE	1.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
TEST MODE	B	TESTED BY	Brad Wu

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-10.18	8	PASS
6	2437	-9.95	8	PASS
11	2462	-10.79	8	PASS


CH 1

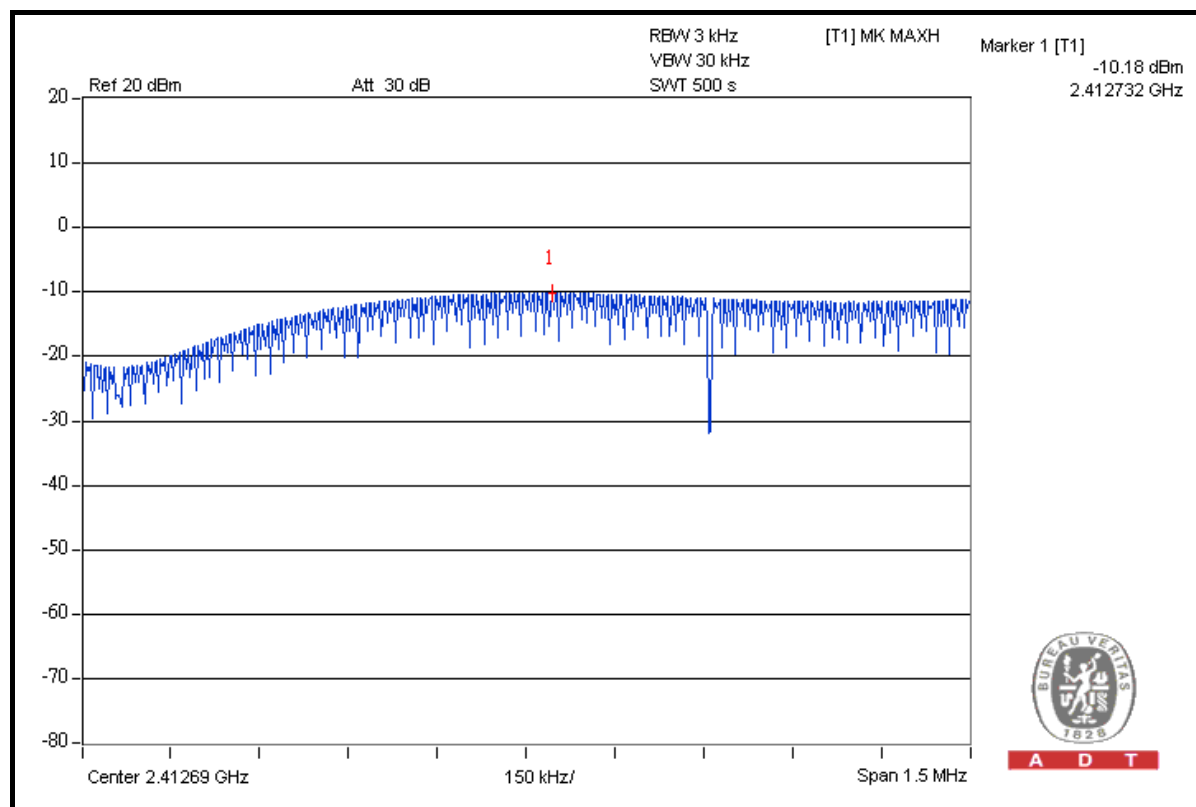




A D T

CH 6

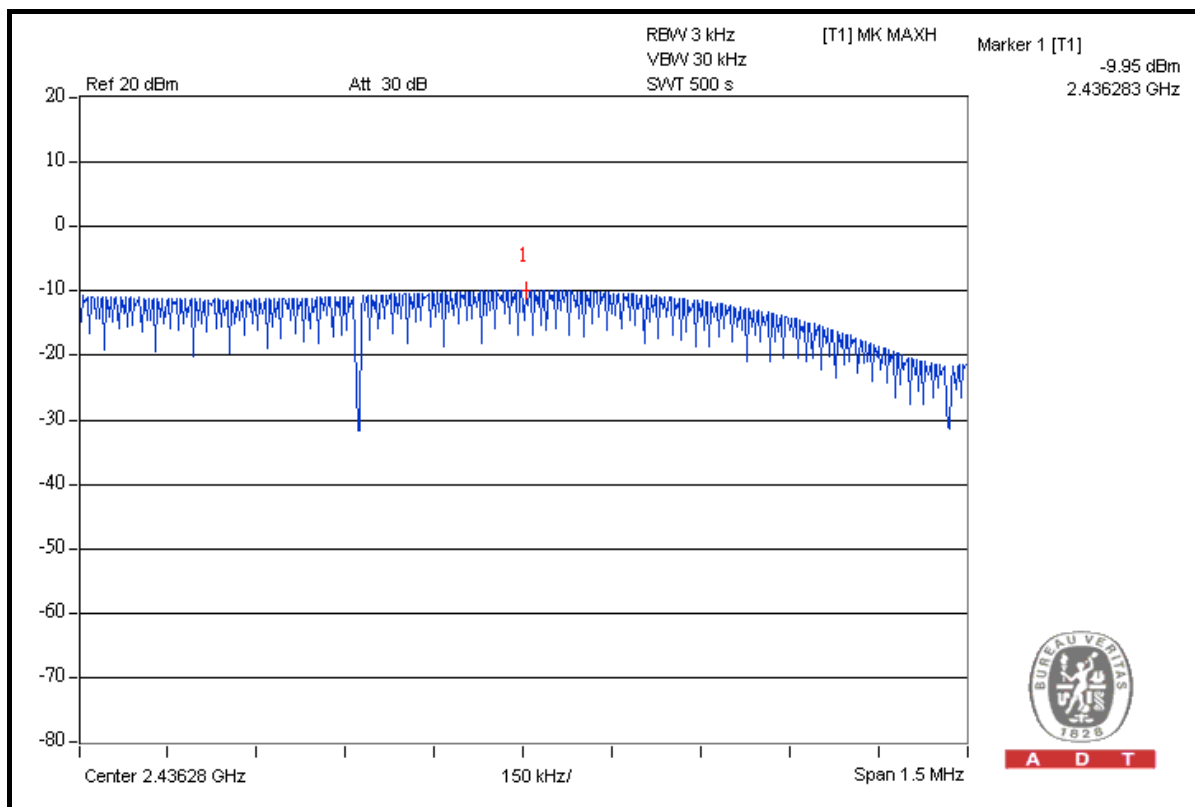

CH 11

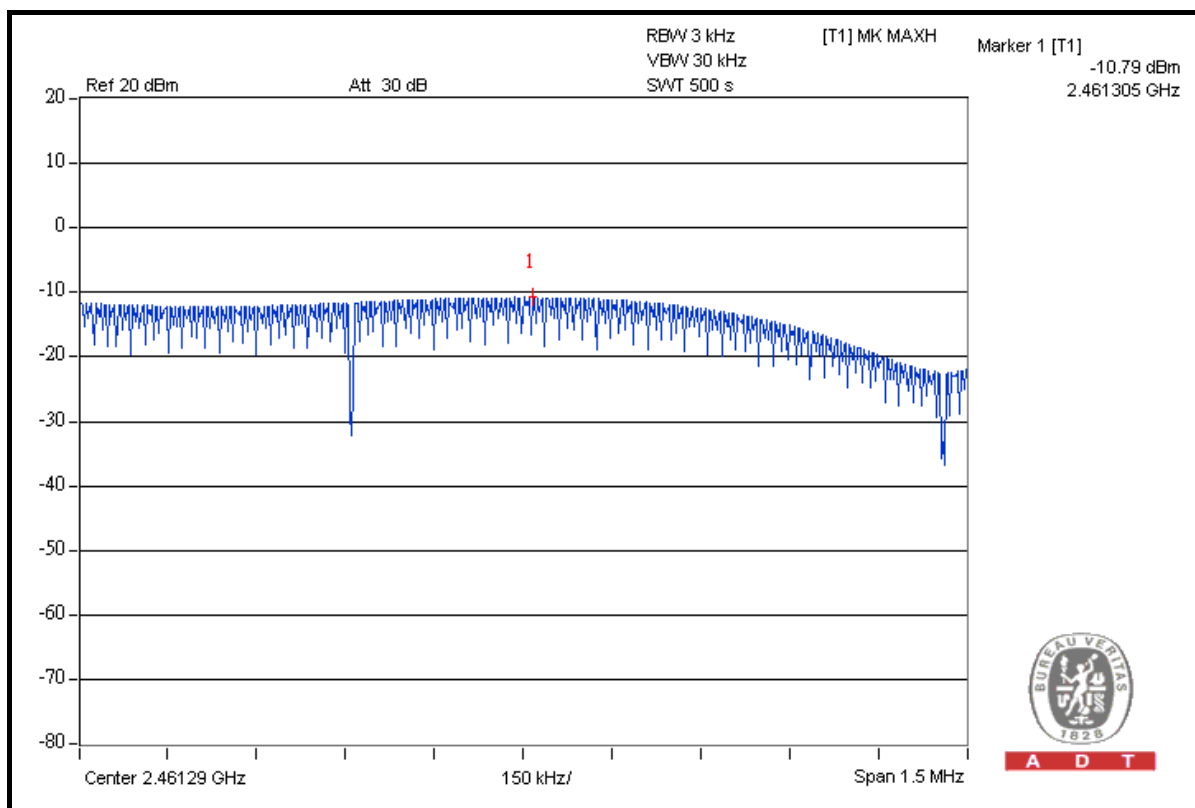


802.11g OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
TEST MODE	A	TESTED BY	Brad Wu

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-14.42	8	PASS
6	2437	-12.50	8	PASS
11	2462	-14.90	8	PASS


CH 1

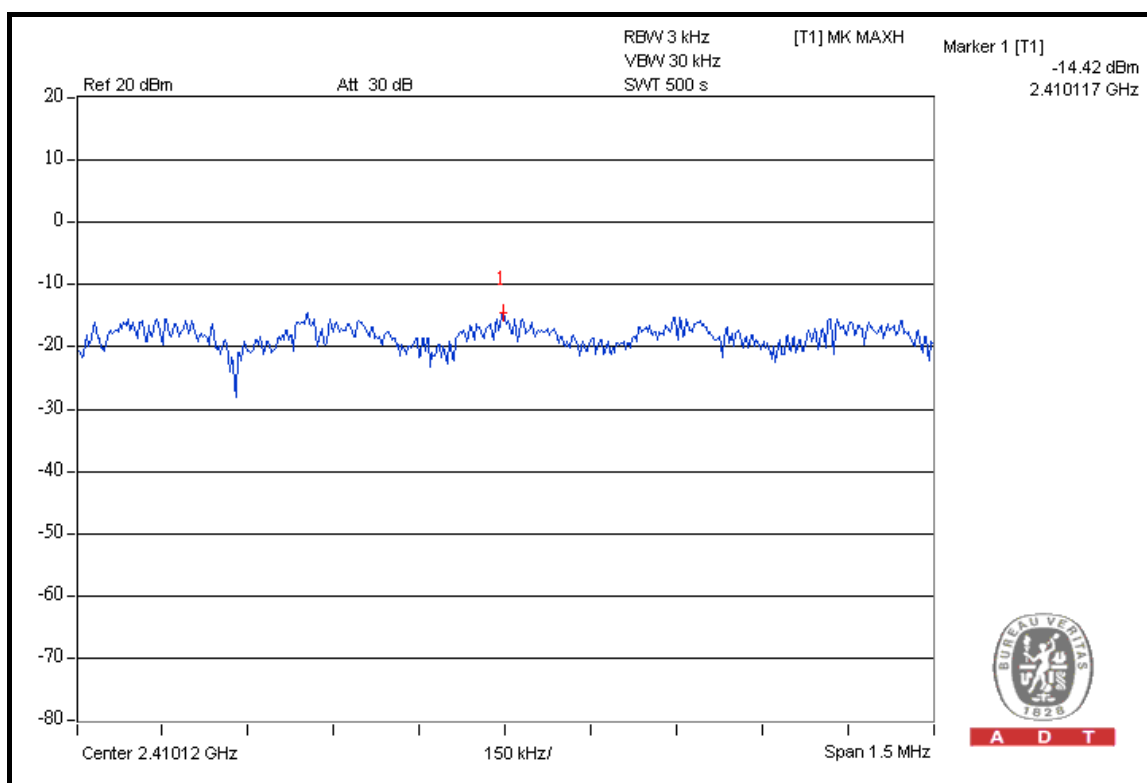




A D T

CH 6

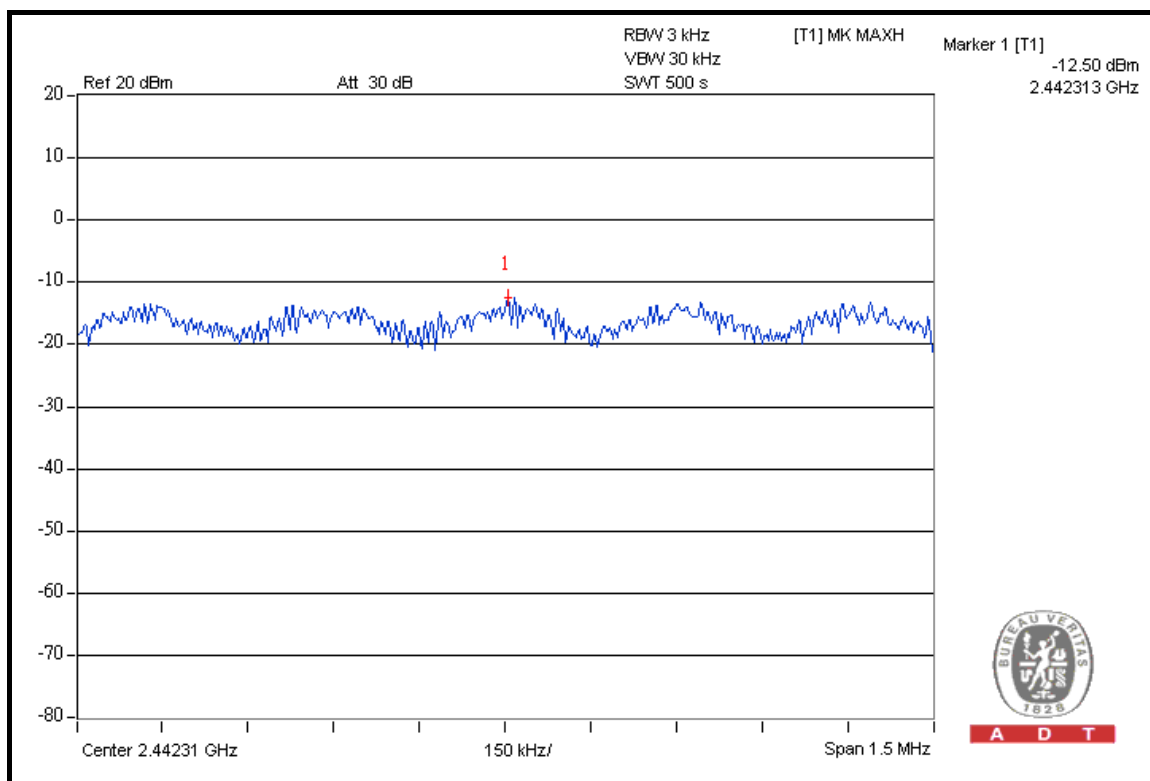


CH 11

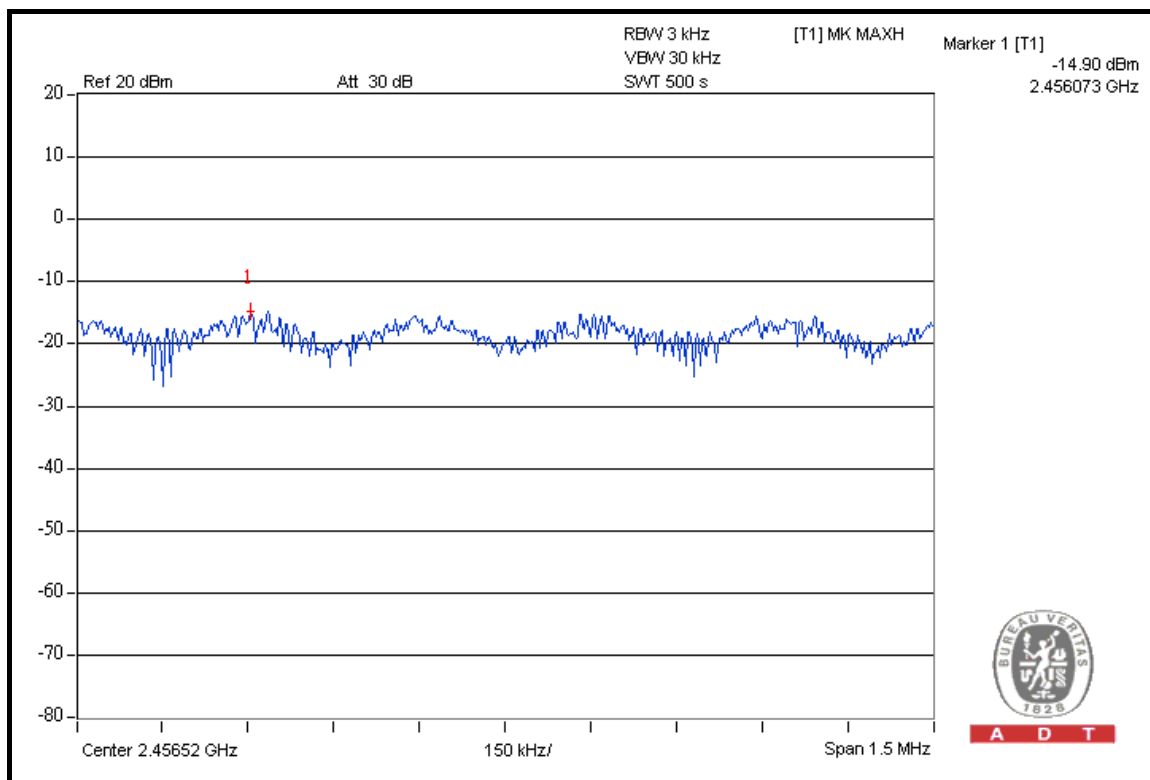

MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
TEST MODE	B	TESTED BY	Brad Wu

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-14.61	8	PASS
6	2437	-12.53	8	PASS
11	2462	-15.02	8	PASS


CH 1

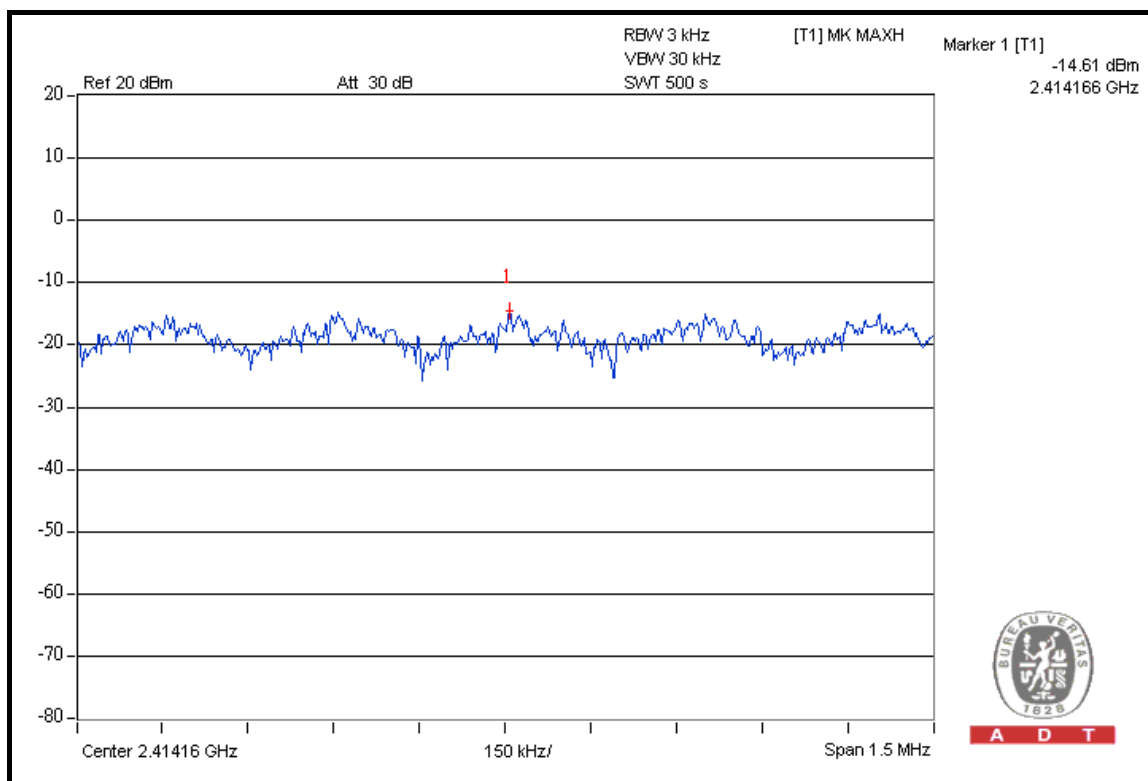




A D T

CH 6

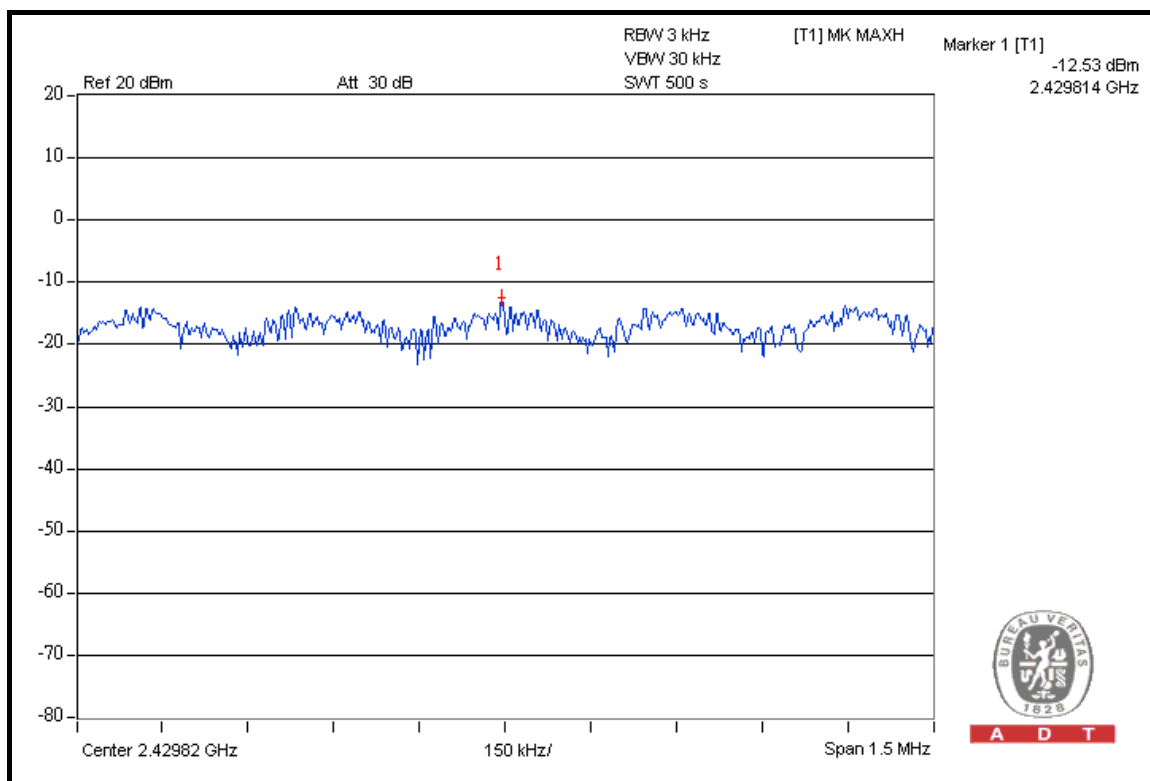

CH 11

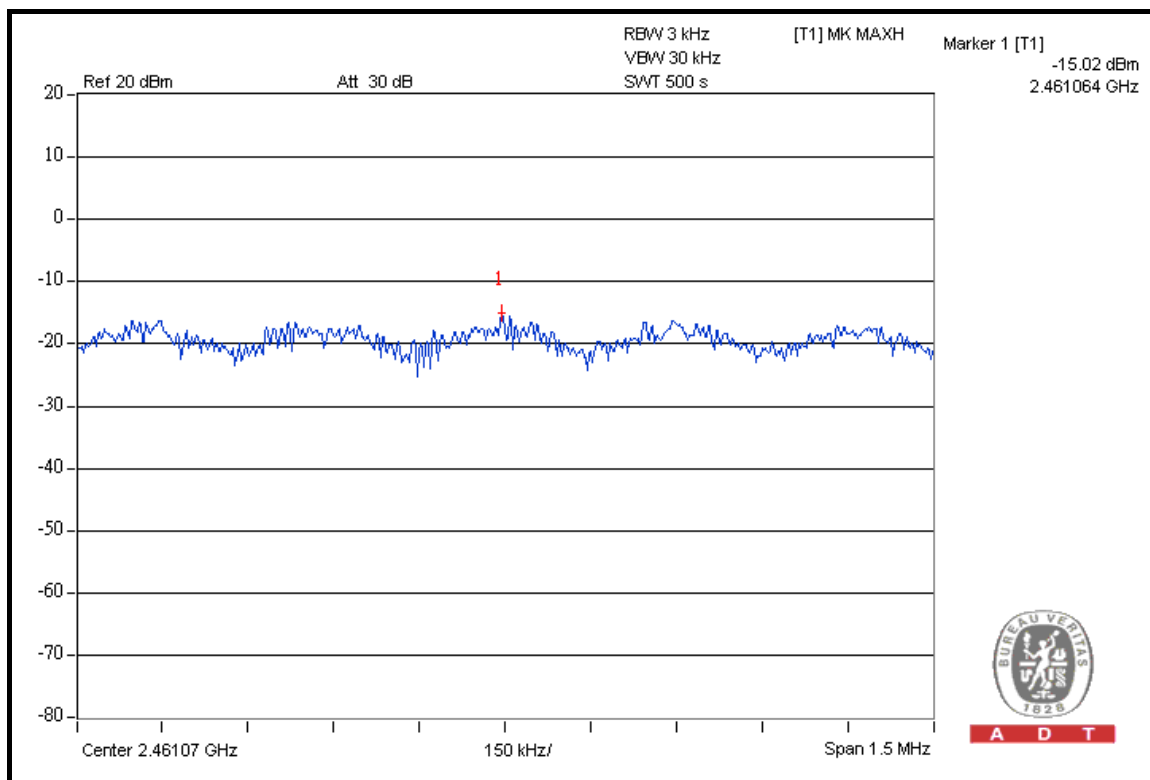


DRAFT 802.11n (20MHz) OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
TEST MODE	A	TESTED BY	Brad Wu

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-13.33	8	PASS
6	2437	-11.24	8	PASS
11	2462	-14.07	8	PASS


CH 1

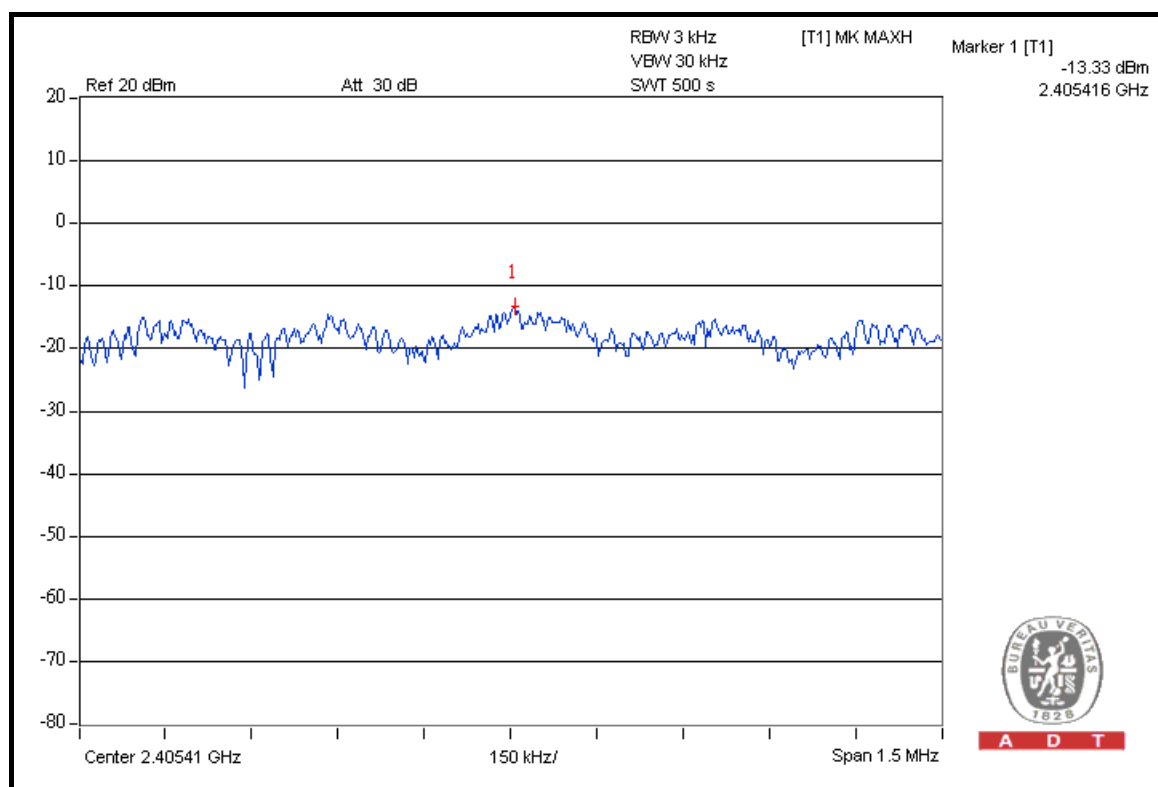




A D T

CH 6

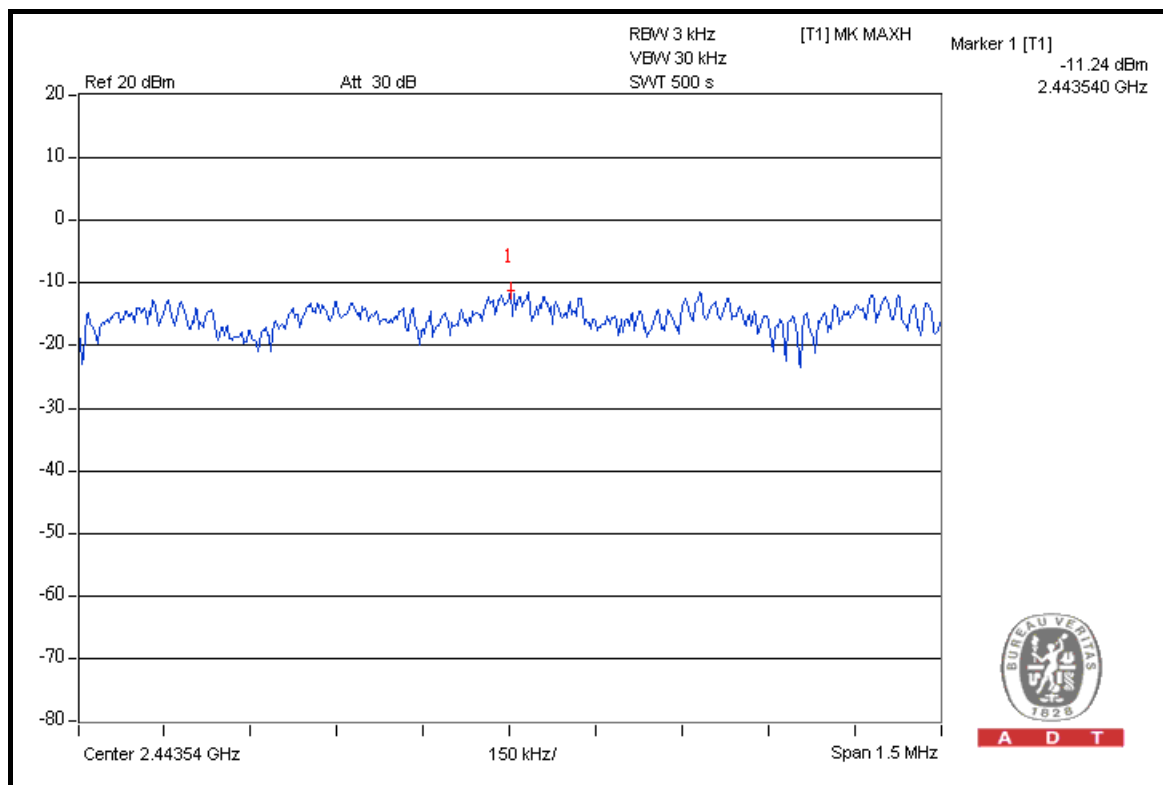


CH 11

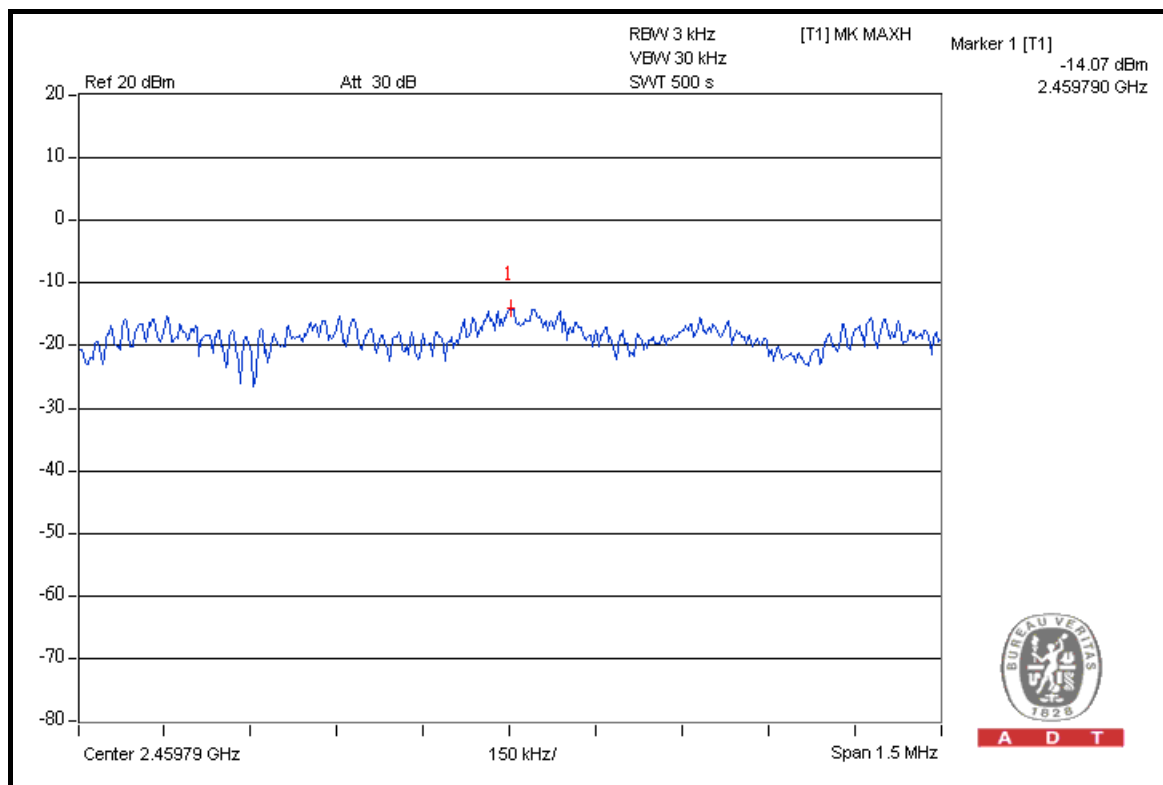

MODULATION TYPE	BPSK	TRANSFER RATE	6.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
TEST MODE	B	TESTED BY	Brad Wu

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-13.26	8	PASS
6	2437	-11.18	8	PASS
11	2462	-13.70	8	PASS


CH 1

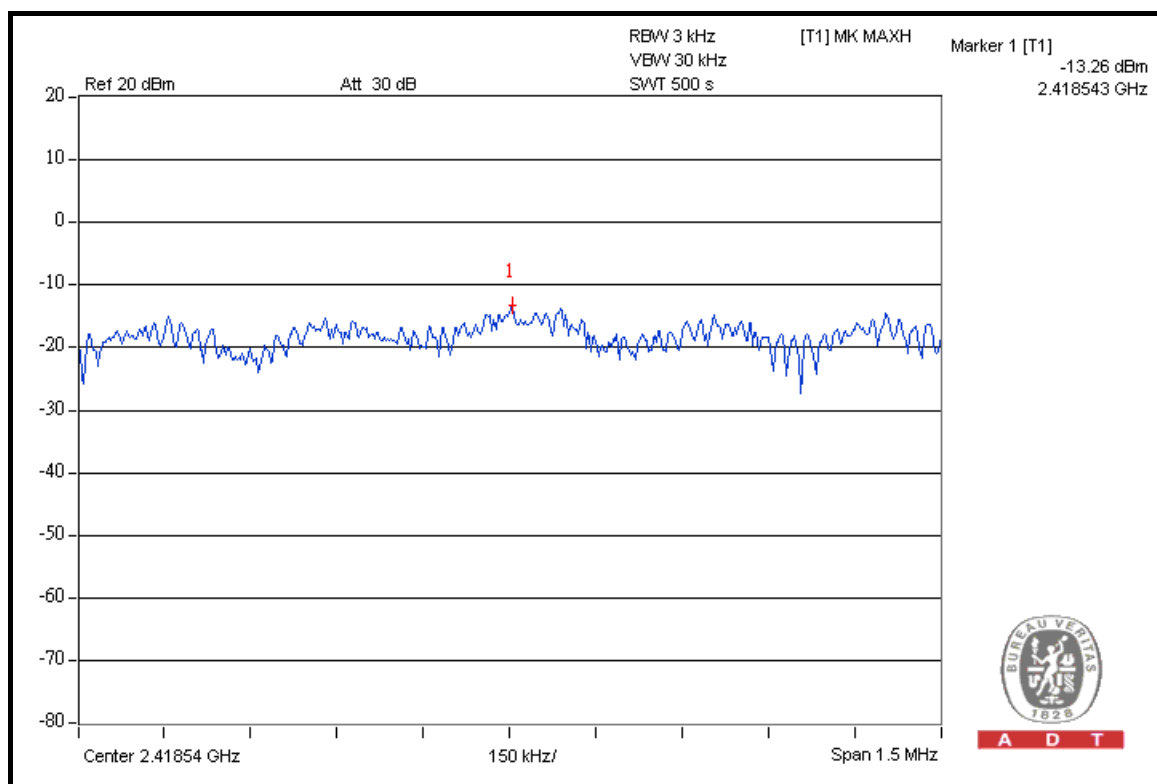




A D T

CH 6

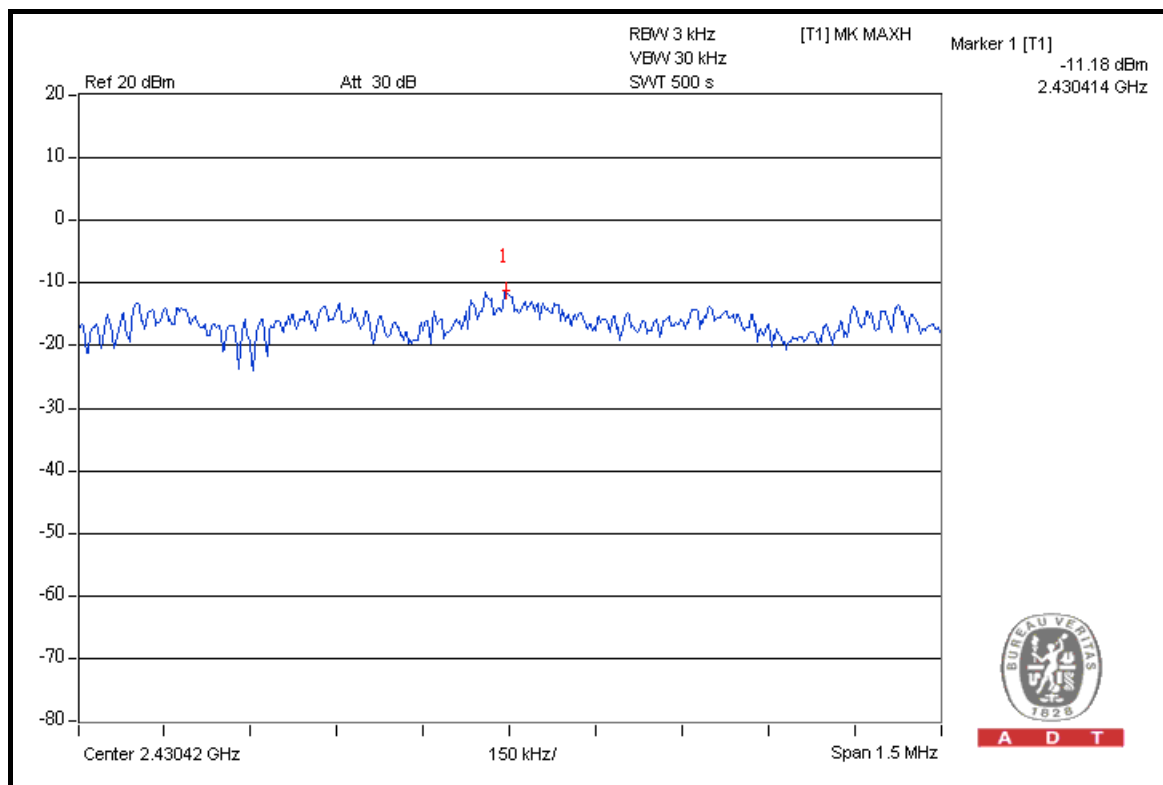

CH 11

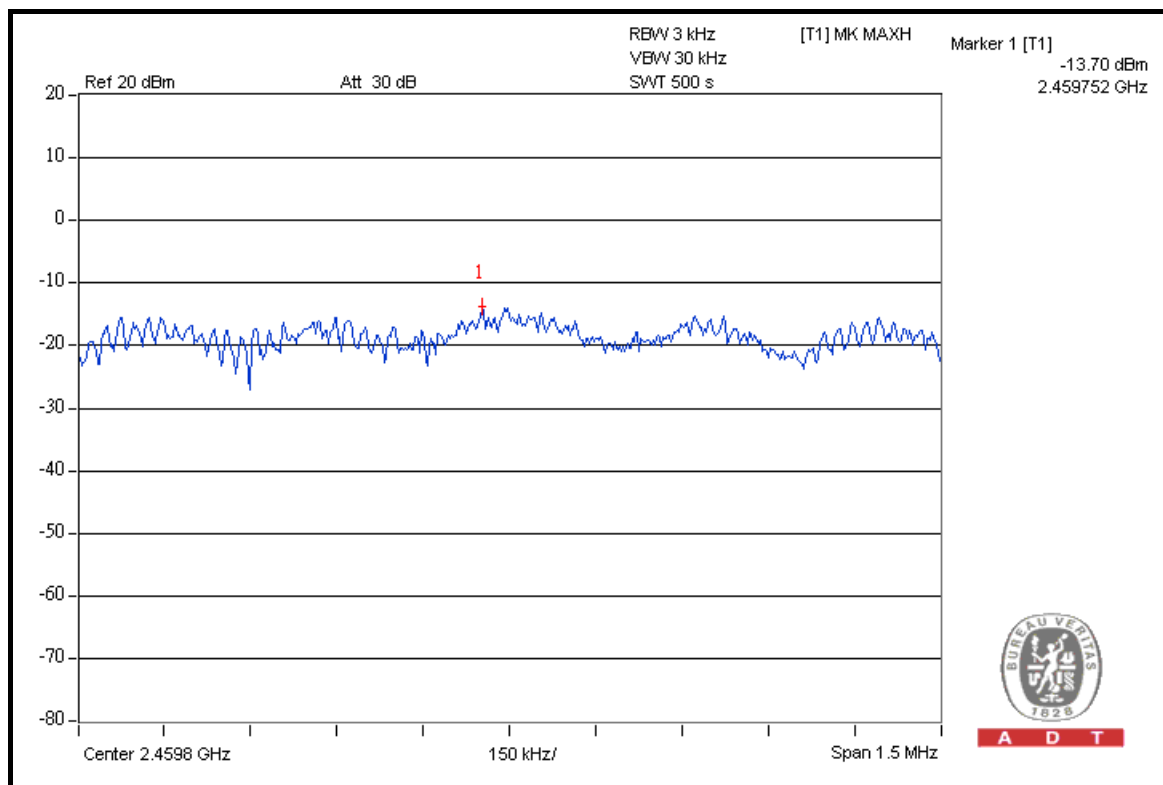


DRAFT 802.11n (40MHz) OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	15.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
TEST MODE	A	TESTED BY	Brad Wu

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2422	-14.83	8	PASS
4	2437	-14.66	8	PASS
7	2452	-15.75	8	PASS


CH 1

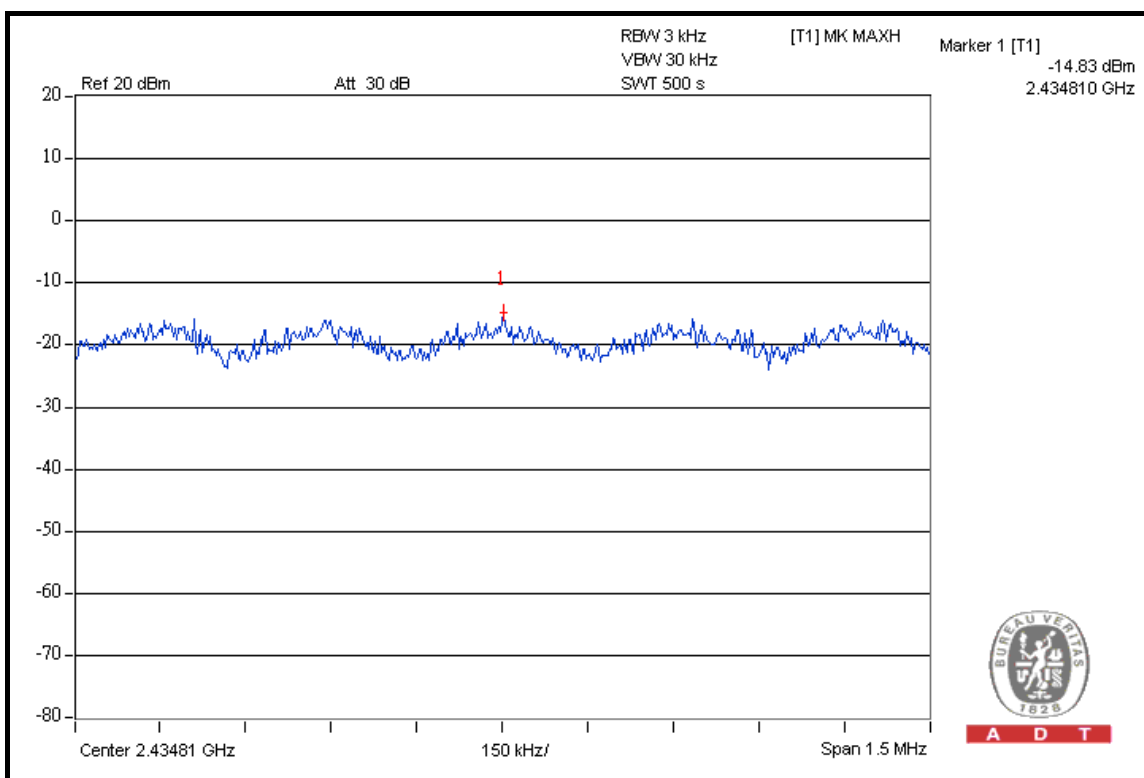




A D T

CH 4

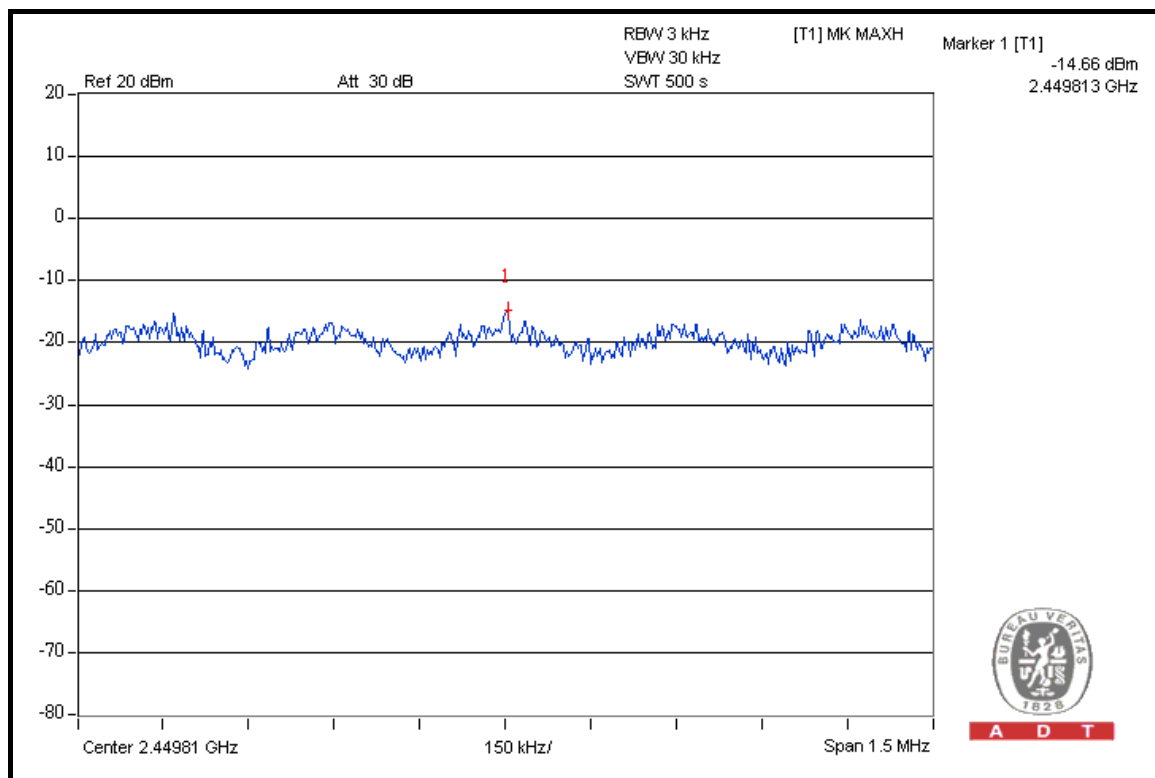


CH 7

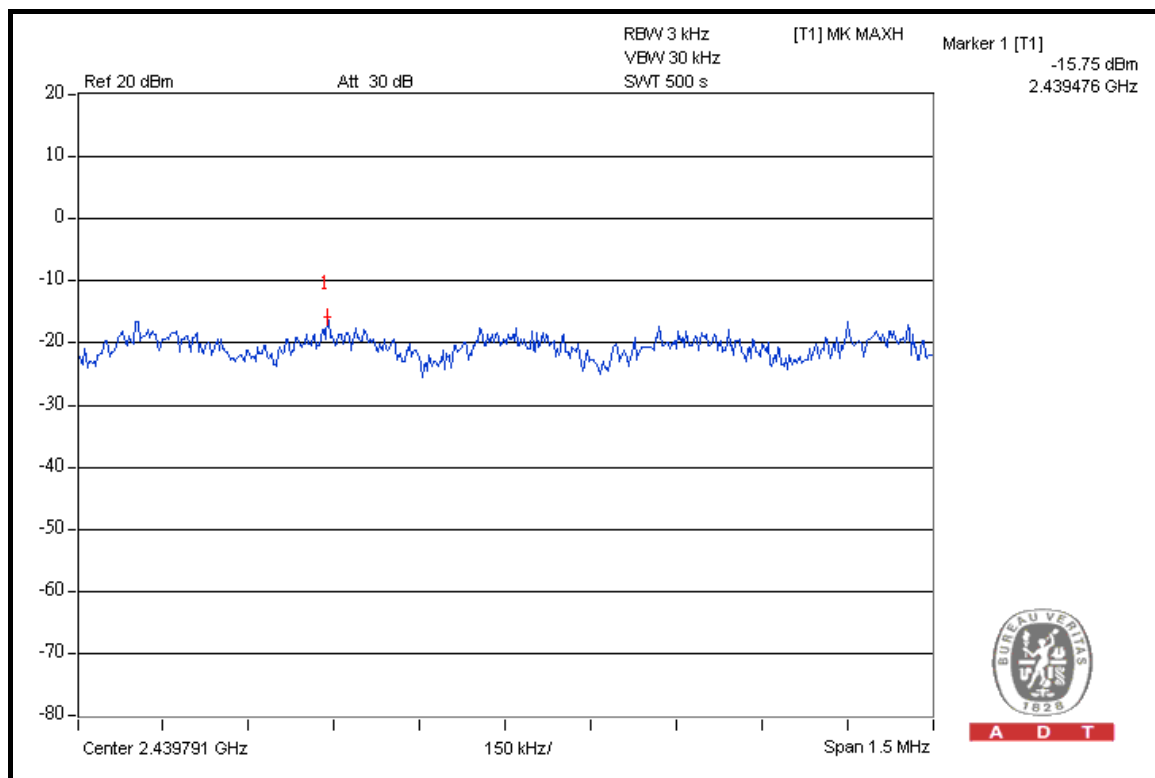

MODULATION TYPE	BPSK	TRANSFER RATE	15.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
TEST MODE	B	TESTED BY	Brad Wu

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2422	-16.00	8	PASS
4	2437	-15.86	8	PASS
7	2452	-16.81	8	PASS


CH 1

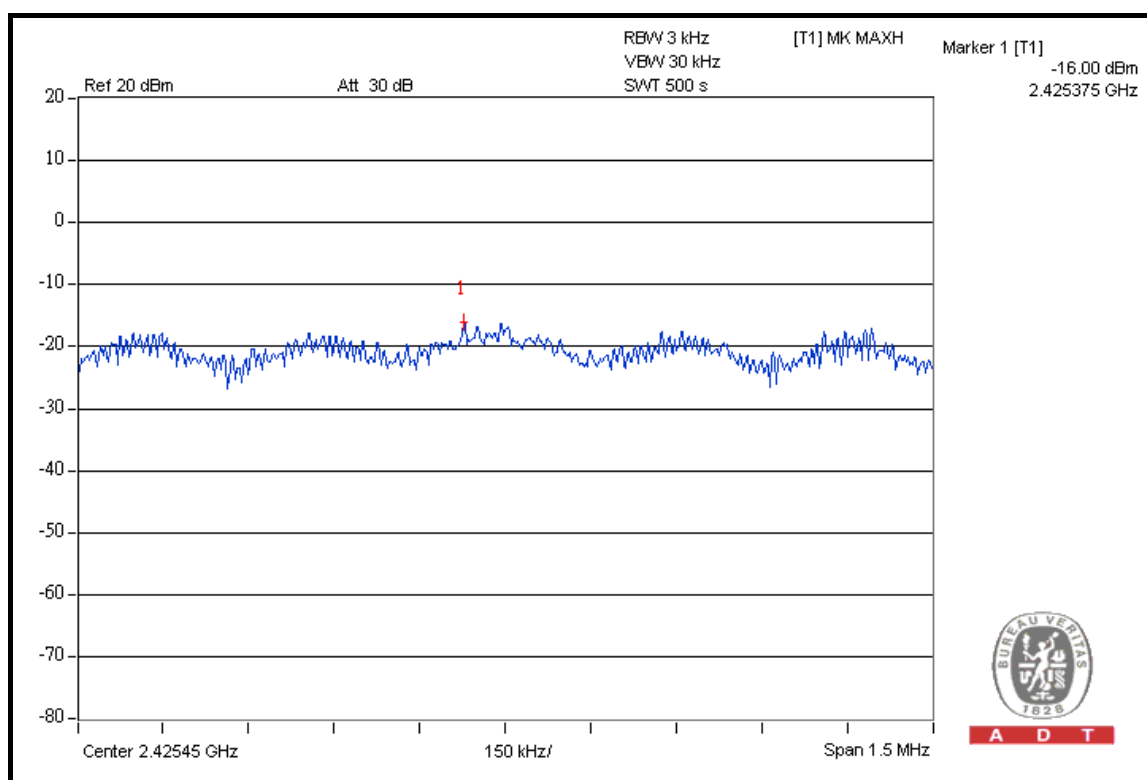




A D T

CH 4

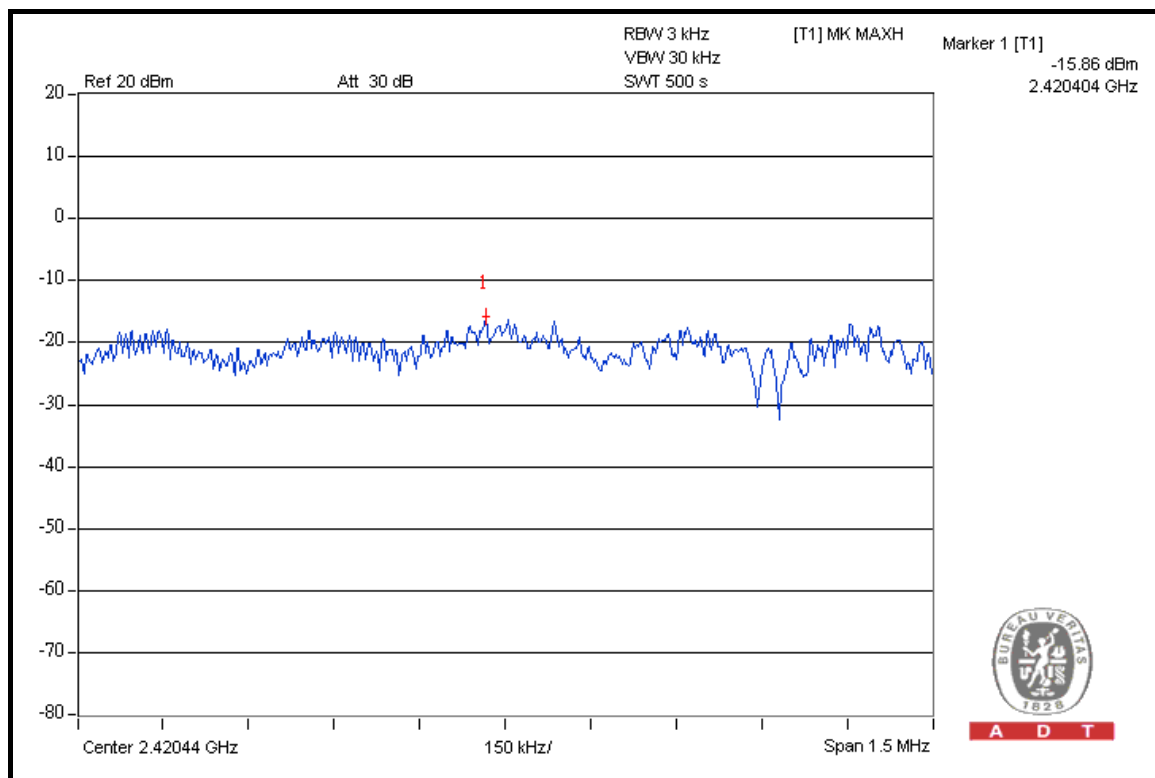

CH 7

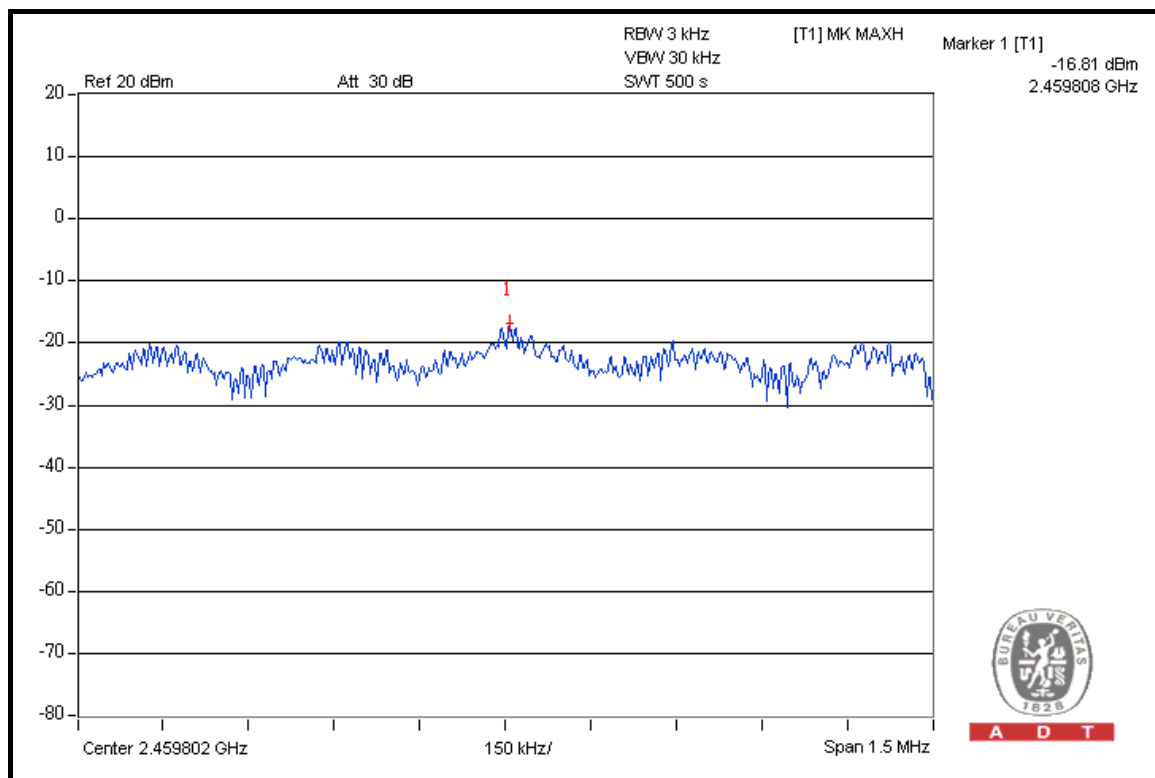

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100041	Apr. 22, 2008	Apr. 21, 2009

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz and 300kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW = 100kHz, VBW = 300kHz; Average RBW = 1MHz, VBW = 10Hz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6.

4.6.6 TEST RESULTS

The spectrum plots are attached on the following 24 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS MODULATION

TEST MODE A

NOTE 1: The band edge emission plot on the next page shows 52.29dBc between carrier maximum power and local maximum emission in restrict band (2.3892GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 113.72dBuV/m (Peak), so the maximum field strength in restrict band is $113.72 - 52.29 = 61.43\text{dBuV/m}$ which is under 74dBuV/m limit.


The band edge emission plot on the next page shows 56.14dBc between carrier maximum power and local maximum emission in restrict band (2.3872GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 109.01dBuV/m (Average), so the maximum field strength in restrict band is $109.01 - 56.14 = 52.87\text{dBuV/m}$ which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 52.40dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 112.38dBuV/m (Peak), so the maximum field strength in restrict band is $112.38 - 52.40 = 59.98\text{dBuV/m}$ which is under 74dBuV/m limit.


The band edge emission plot on the next third page shows 54.74dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 107.69dBuV/m (Average), so the maximum field strength in restrict band is $107.69 - 54.74 = 52.95\text{dBuV/m}$ which is under 54dBuV/m limit.



A D T

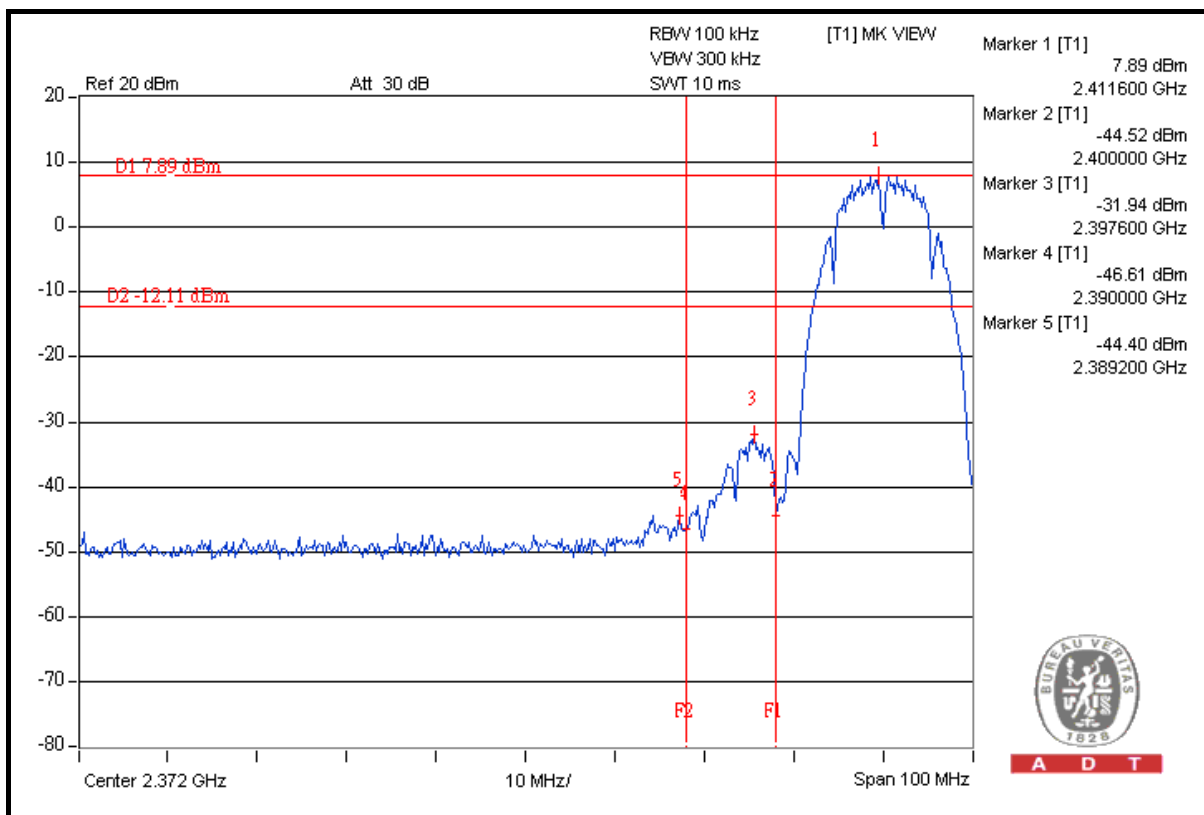


A D T

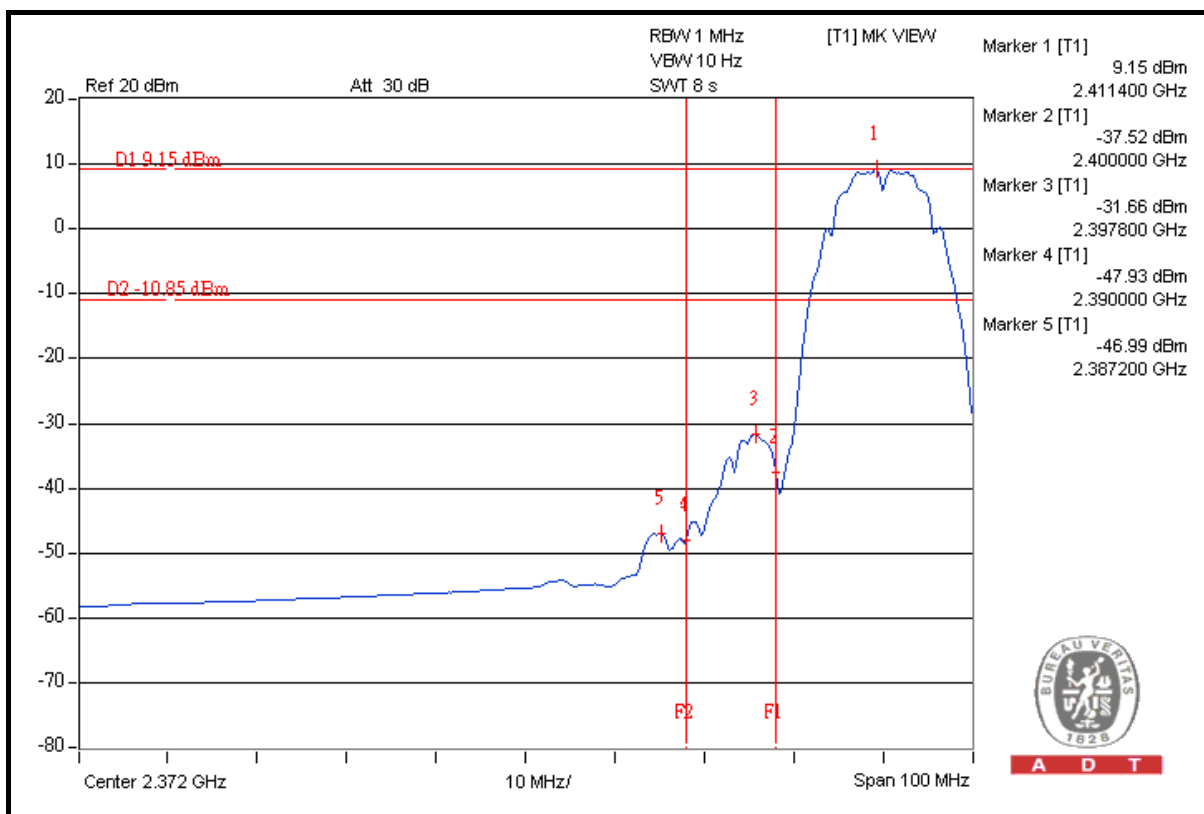


A D T



A D T

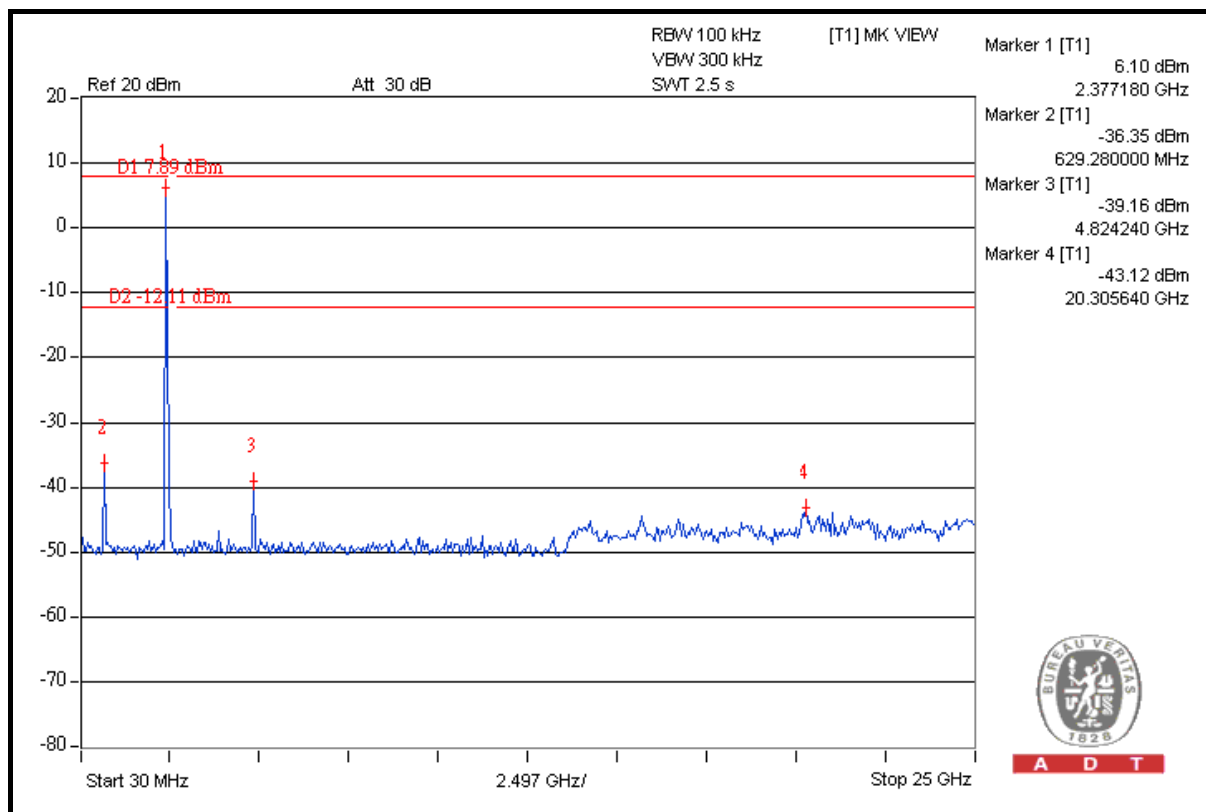

A D T

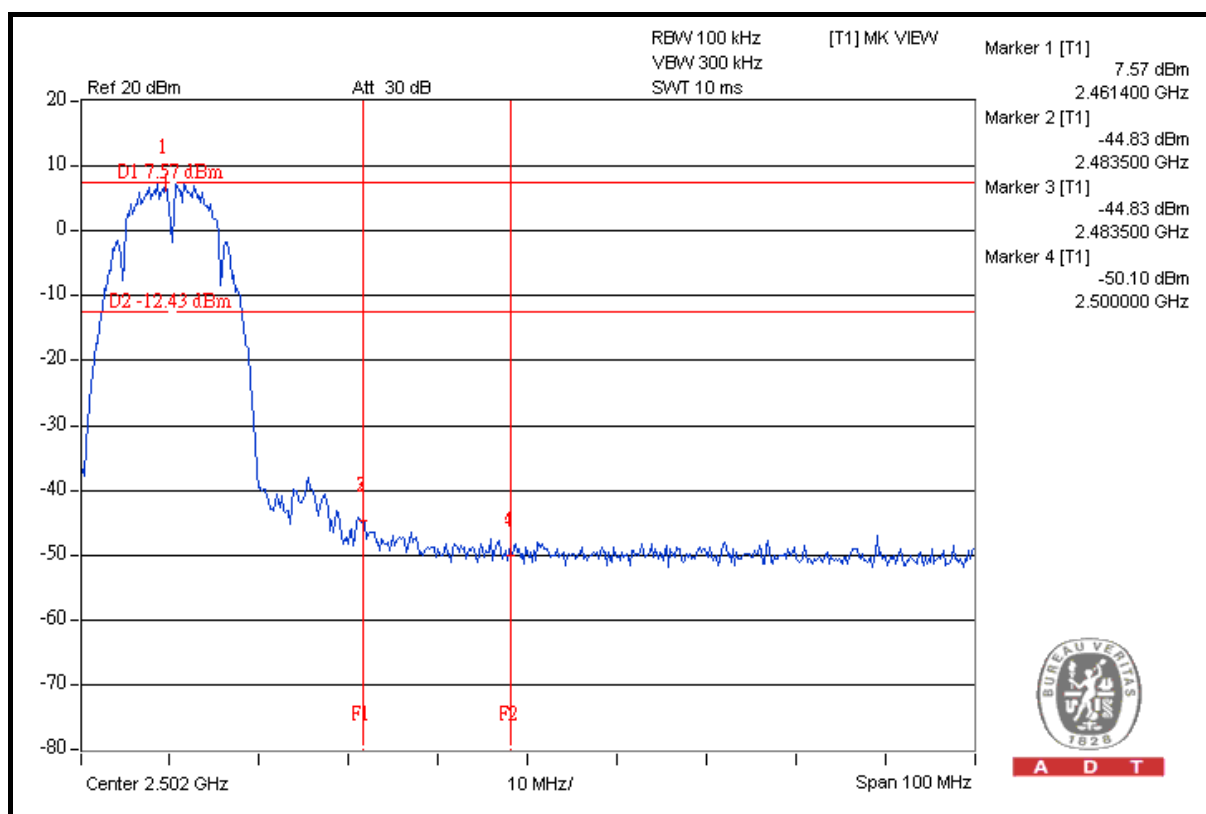

A D T





TEST MODE B

NOTE 1: The band edge emission plot on the next page shows 52.61dBc between carrier maximum power and local maximum emission in restrict band (2.3896GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 113.23dBuV/m (Peak), so the maximum field strength in restrict band is $113.23 - 52.61 = 60.62\text{dBuV/m}$ which is under 74dBuV/m limit.

The band edge emission plot on the next page shows 56.62dBc between carrier maximum power and local maximum emission in restrict band (2.3892GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 108.50dBuV/m (Average), so the maximum field strength in restrict band is $108.50 - 56.62 = 51.88\text{dBuV/m}$ which is under 54dBuV/m limit.


NOTE 2: The band edge emission plot on the next second page shows 52.66dBc between carrier maximum power and local maximum emission in restrict band (2.4848GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 112.35dBuV/m (Peak), so the maximum field strength in restrict band is $112.35 - 52.66 = 59.69\text{dBuV/m}$ which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 54.77dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 107.74dBuV/m (Average), so the maximum field strength in restrict band is $107.74 - 54.77 = 52.97\text{dBuV/m}$ which is under 54dBuV/m limit.

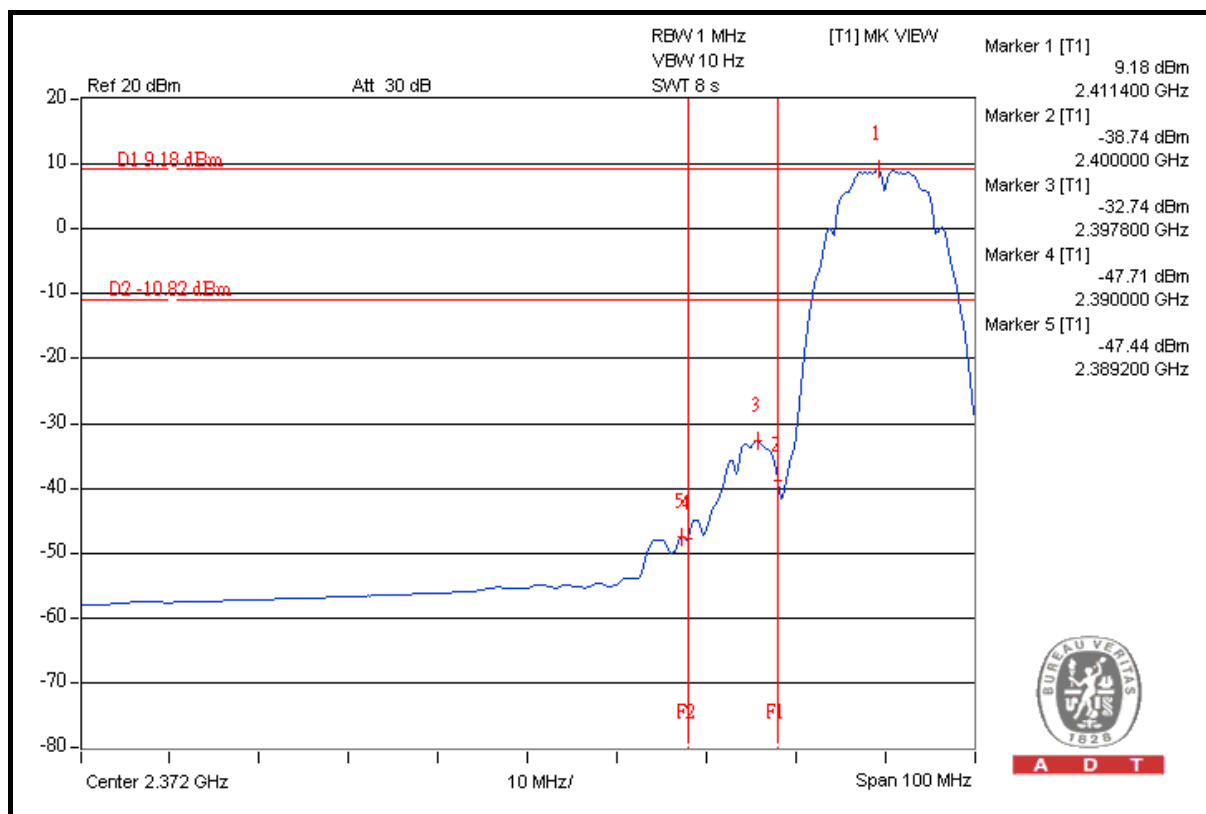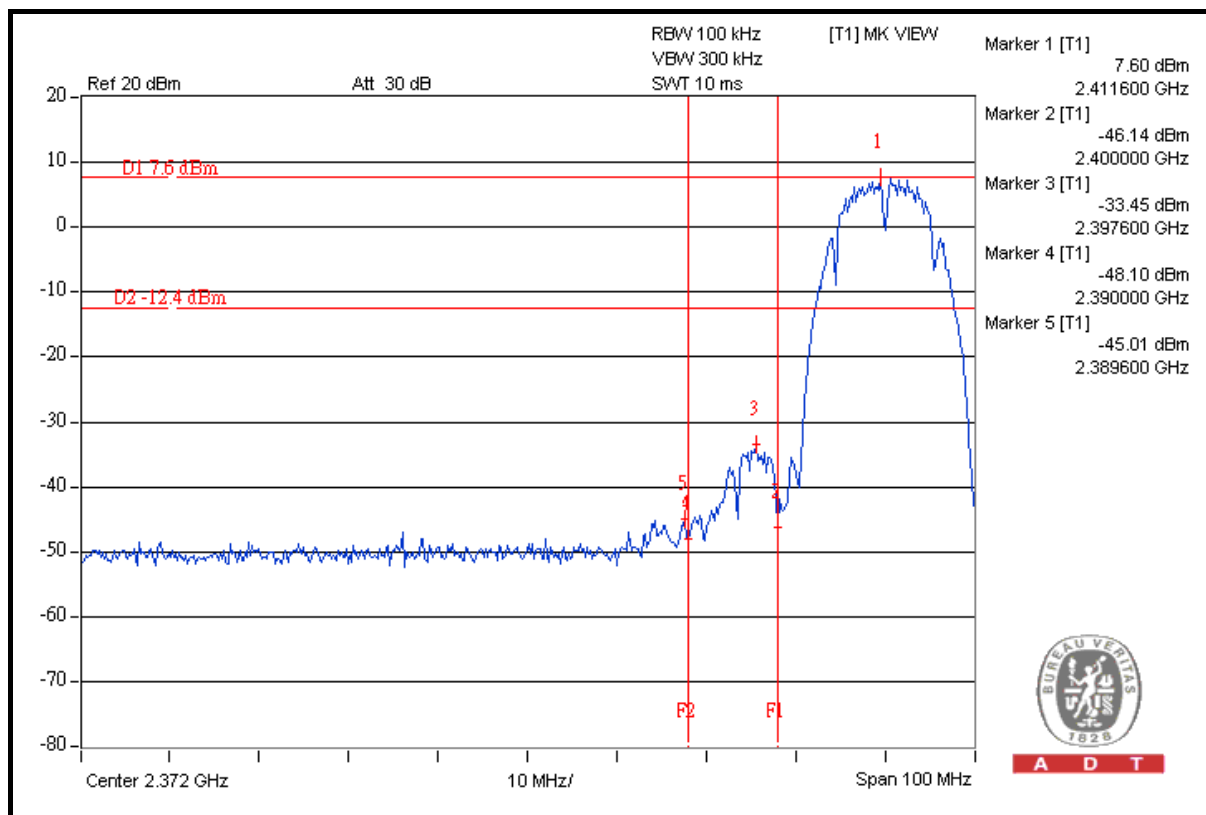




A D T

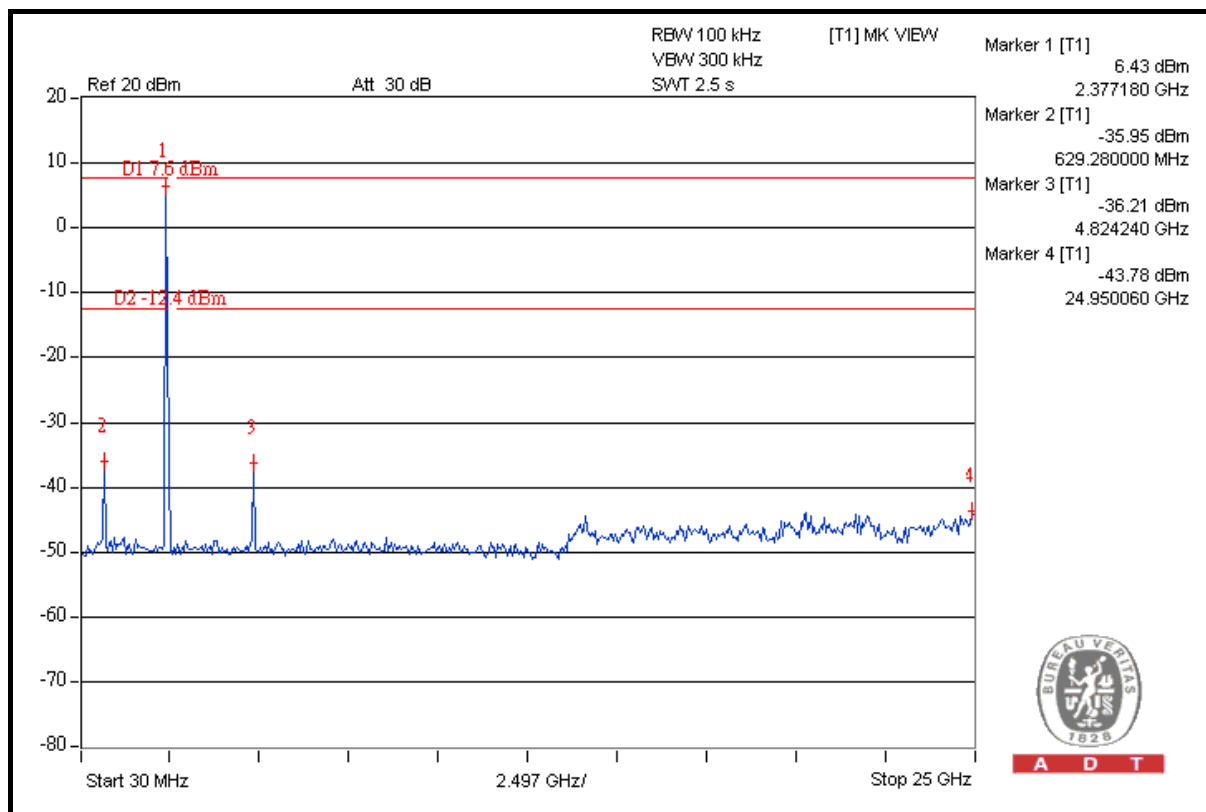

A D T

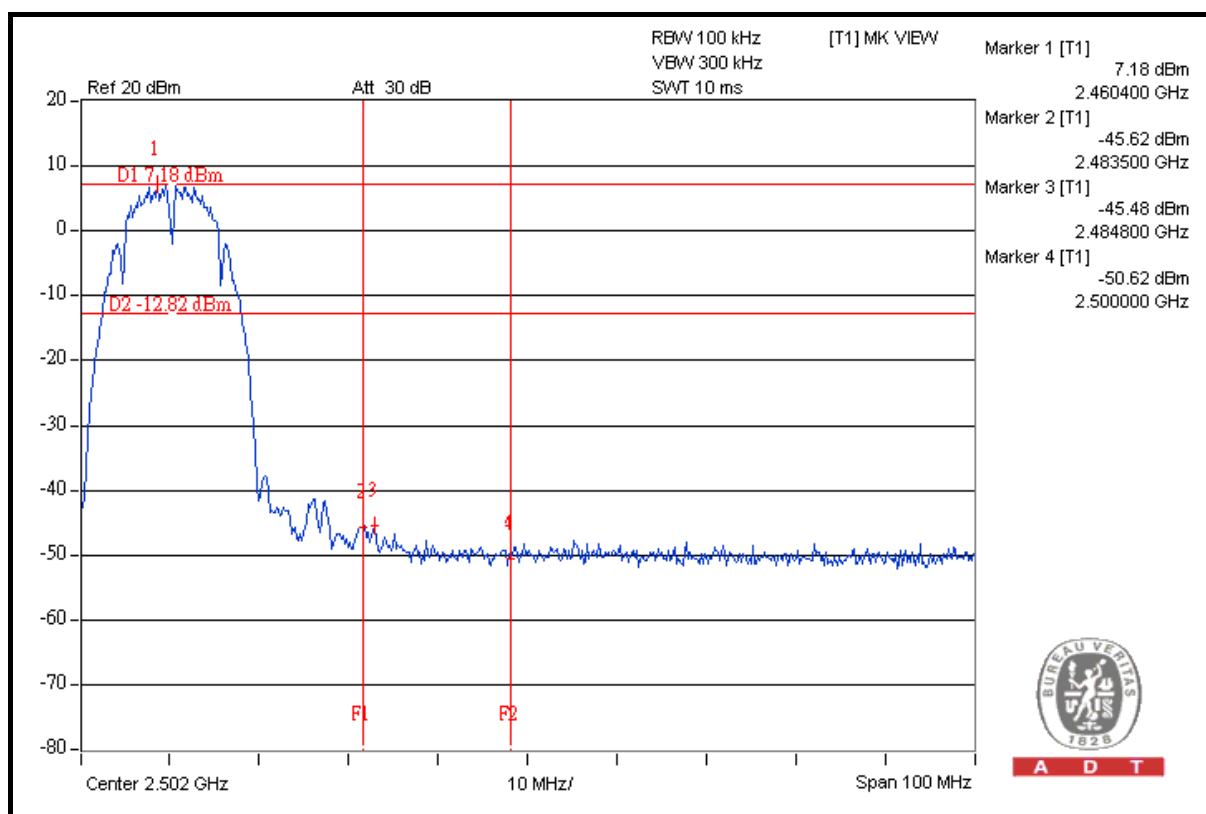

A D T



802.11g OFDM MODULATION

TEST MODE A

NOTE 1: The band edge emission plot on the next page shows 42.94dBc between carrier maximum power and local maximum emission in restrict band (2.3880GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 110.46dBuV/m (Peak), so the maximum field strength in restrict band is $110.46 - 42.94 = 67.52\text{dBuV/m}$ which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 47.21dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 100.13dBuV/m (Average), so the maximum field strength in restrict band is $100.13 - 47.21 = 52.92\text{dBuV/m}$ which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 40.38dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 110.31dBuV/m (Peak), so the maximum field strength in restrict band is $110.31 - 40.38 = 69.93\text{dBuV/m}$ which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 47.82dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 99.86dBuV/m (Average), so the maximum field strength in restrict band is $99.86 - 47.82 = 52.04\text{dBuV/m}$ which is under 54dBuV/m limit.





A D T

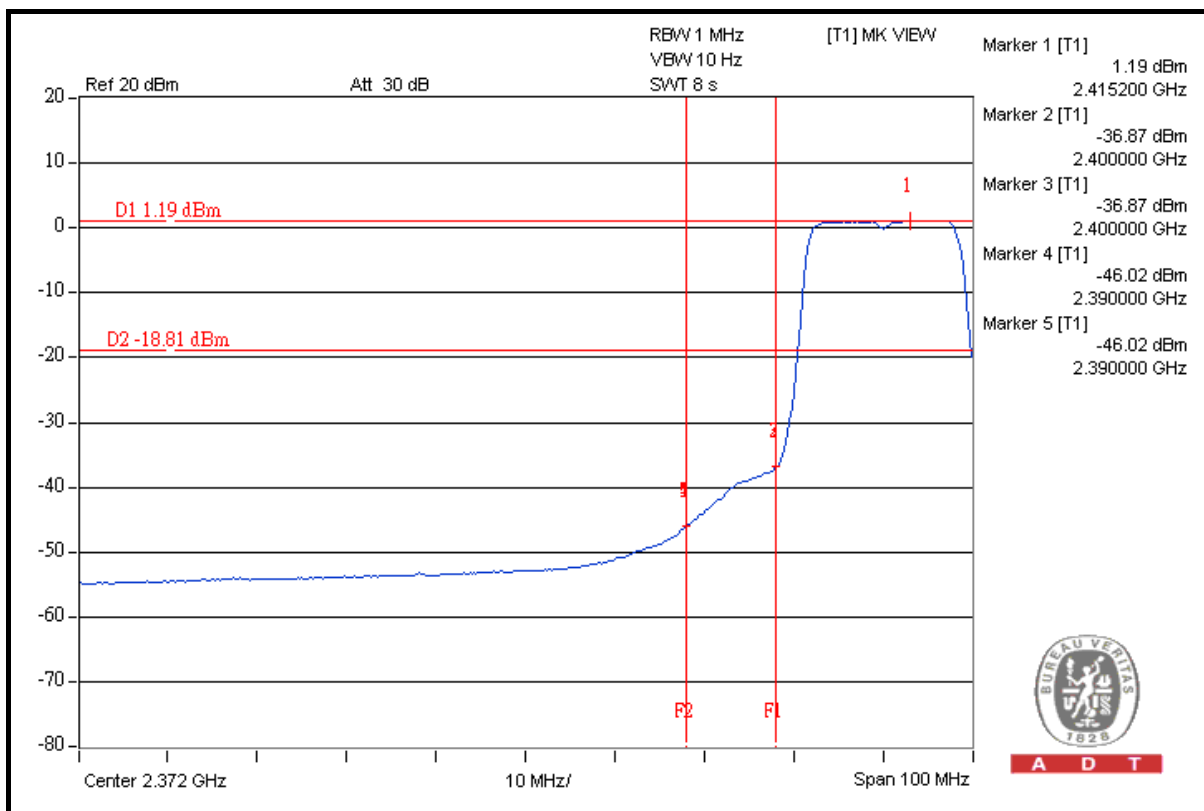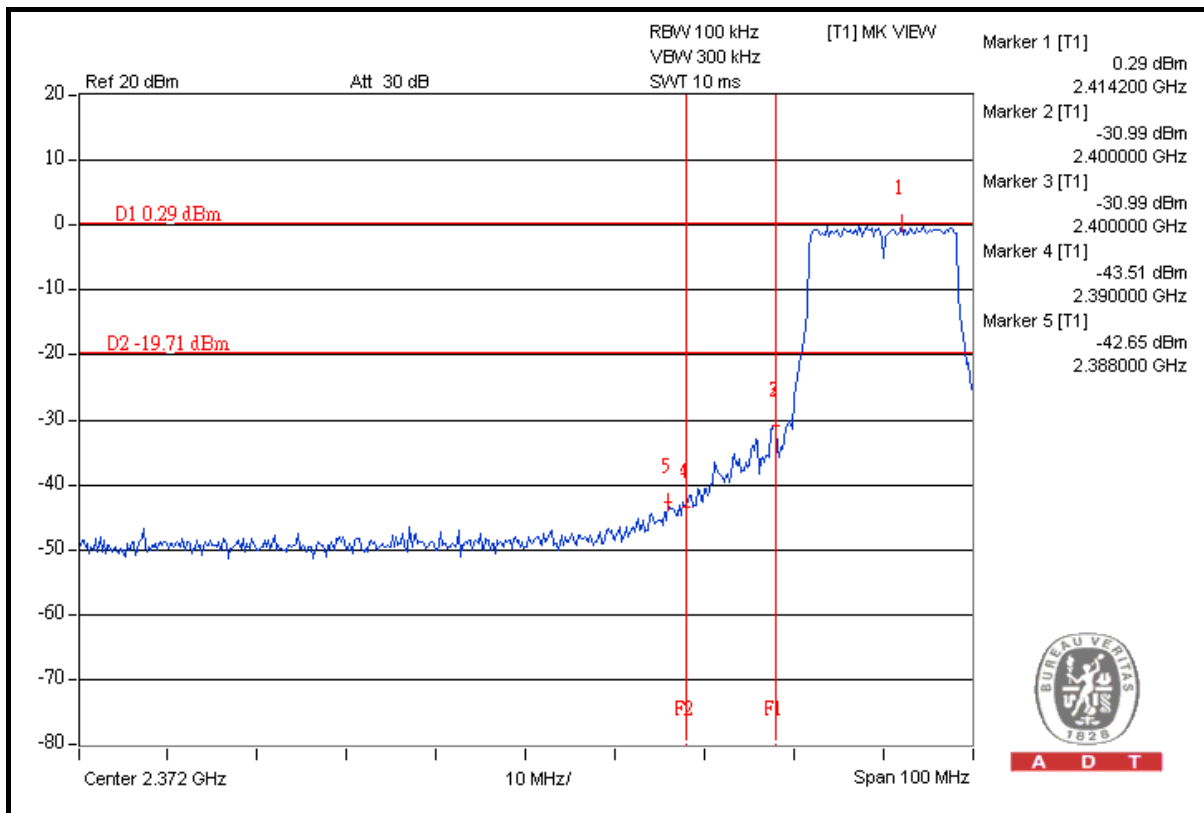



A D T

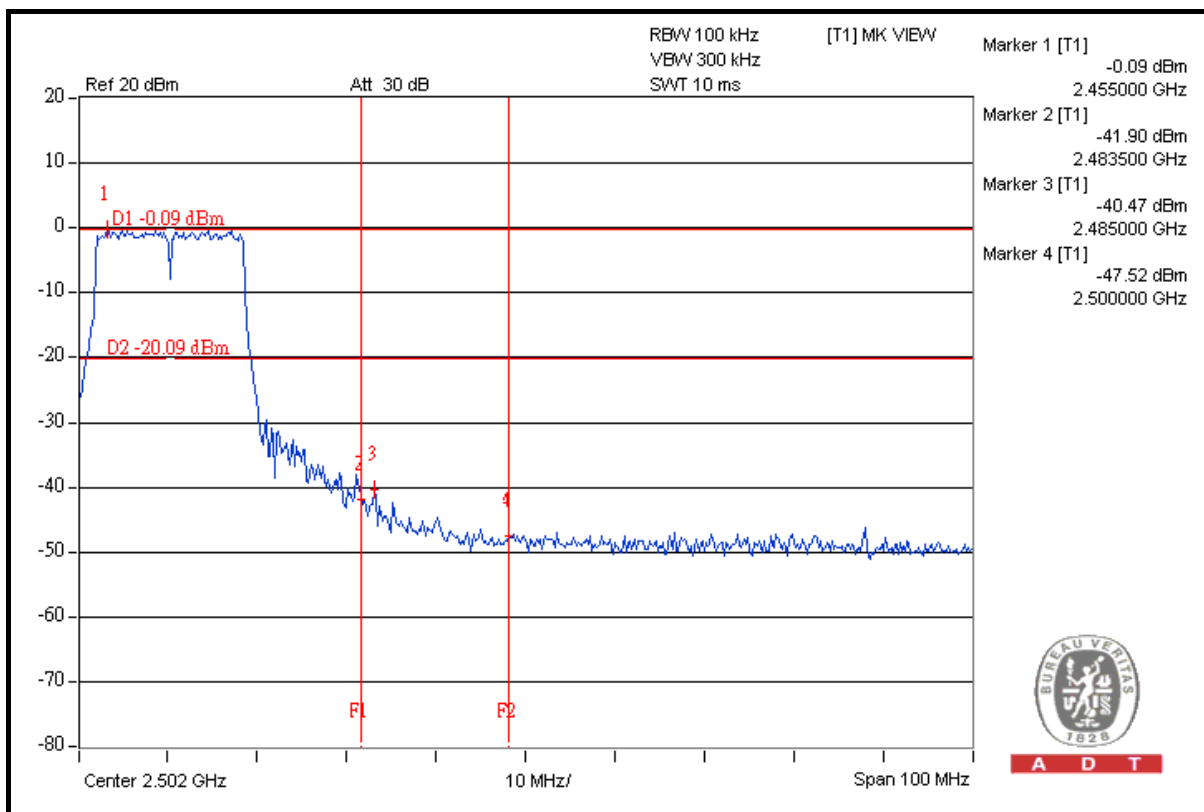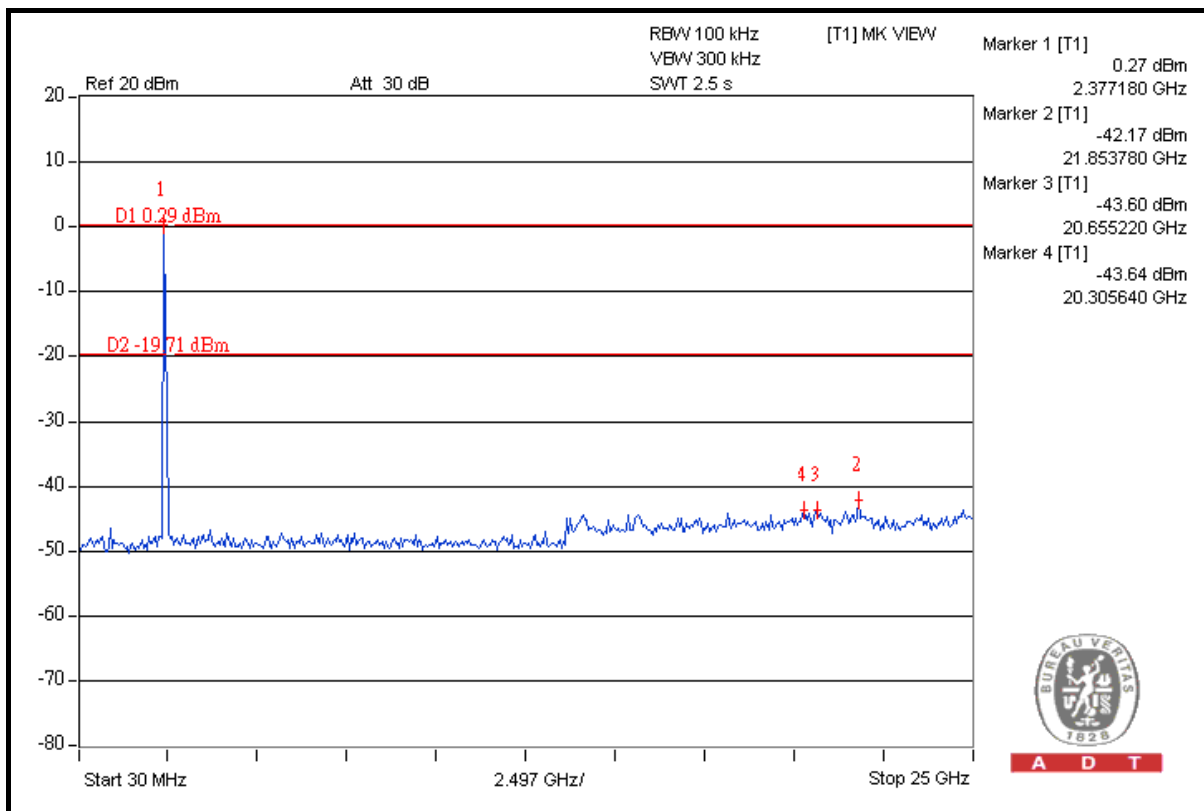



TEST MODE B

NOTE 1: The band edge emission plot on the next page shows 42.85dBc between carrier maximum power and local maximum emission in restrict band (2.3896GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 110.88dBuV/m (Peak), so the maximum field strength in restrict band is $110.88 - 42.85 = 68.03\text{dBuV/m}$ which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 47.84dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 100.75dBuV/m (Average), so the maximum field strength in restrict band is $100.75 - 47.84 = 52.91\text{dBuV/m}$ which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 42.55dBc between carrier maximum power and local maximum emission in restrict band (2.4836GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 110.99dBuV/m (Peak), so the maximum field strength in restrict band is $110.99 - 42.55 = 68.44\text{dBuV/m}$ which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 49.01dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 100.28dBuV/m (Average), so the maximum field strength in restrict band is $100.28 - 49.01 = 51.27\text{dBuV/m}$ which is under 54dBuV/m limit.





A D T

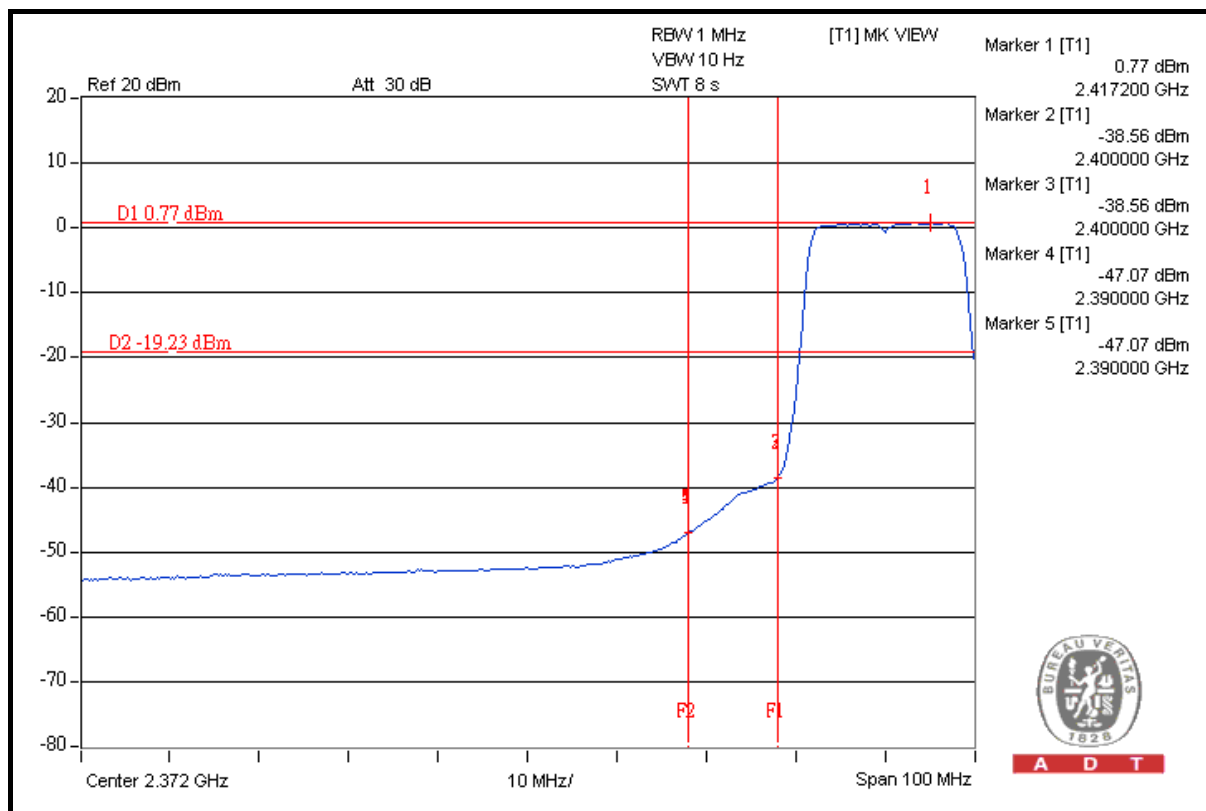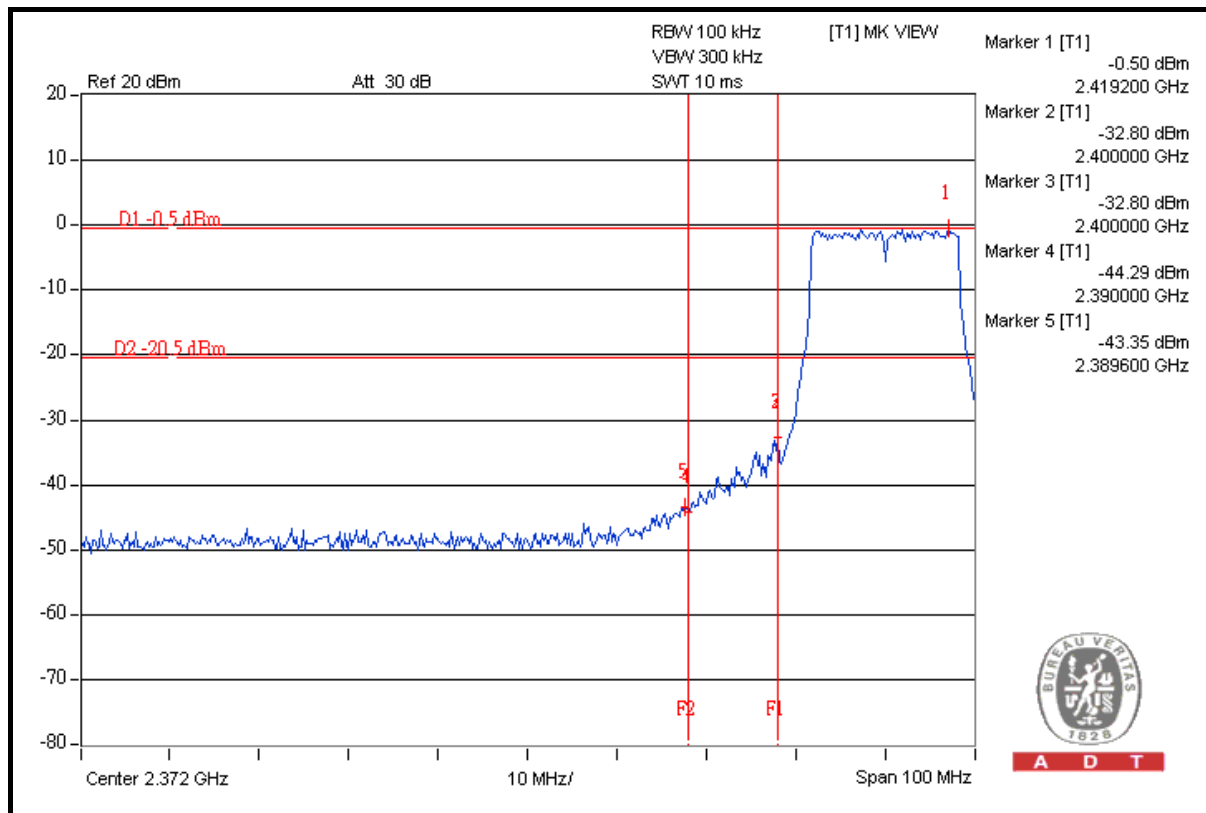





A D T

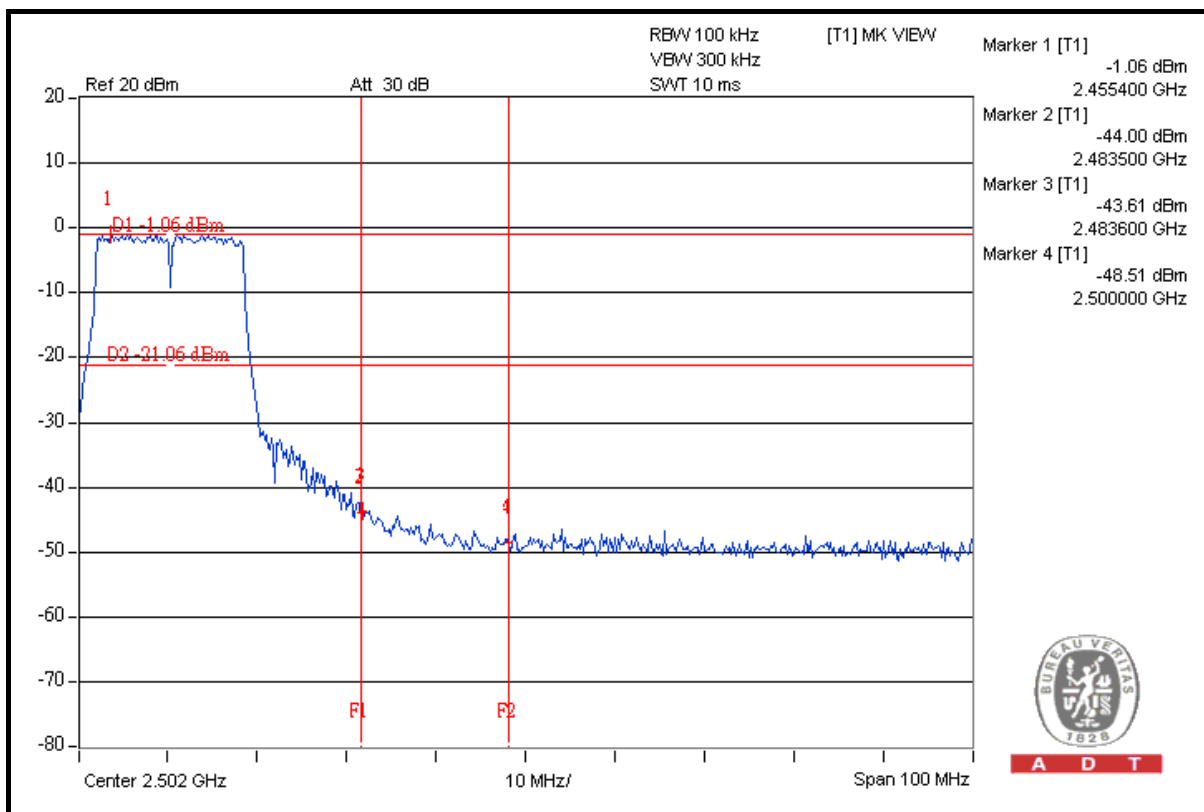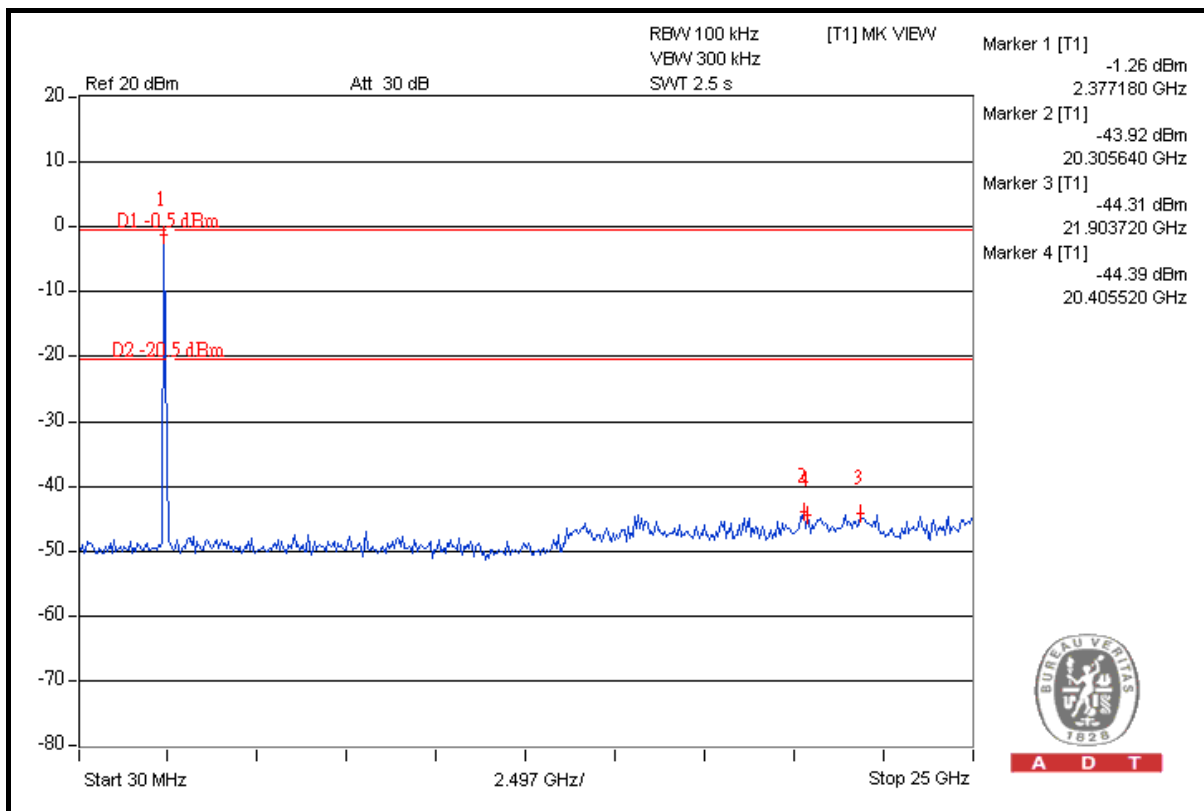



A D T

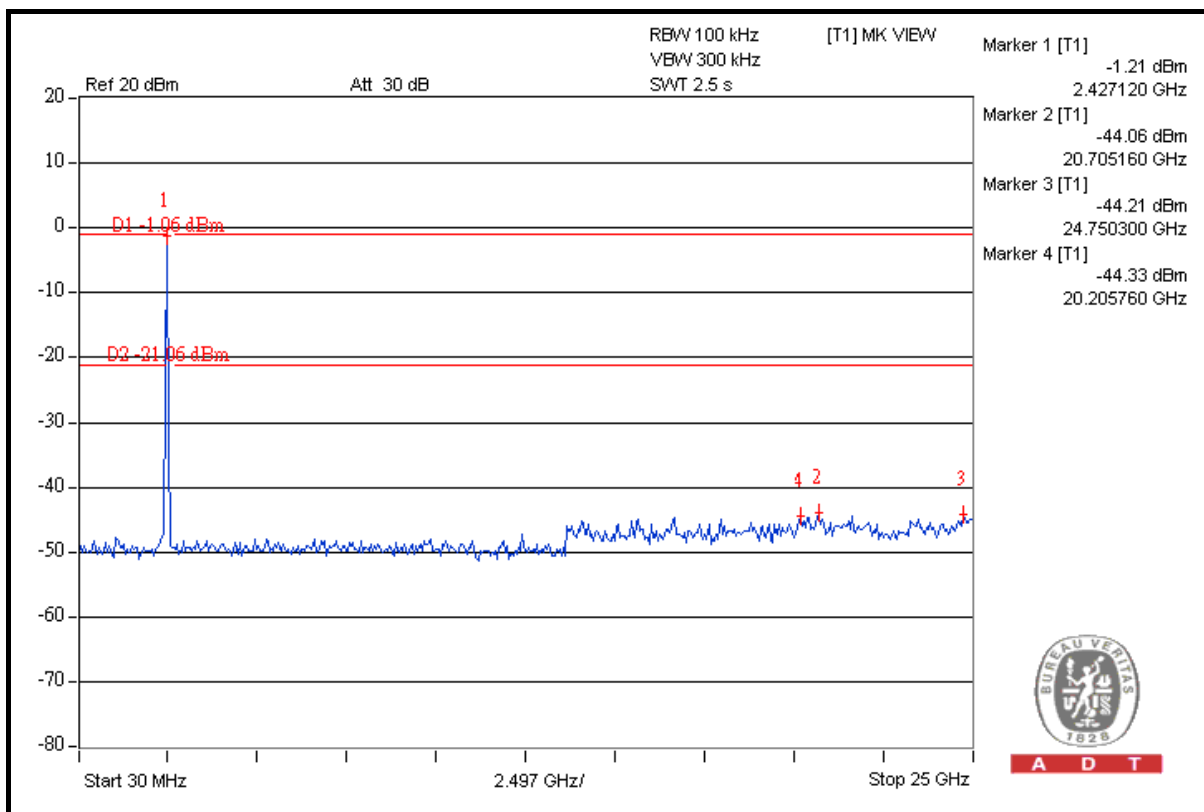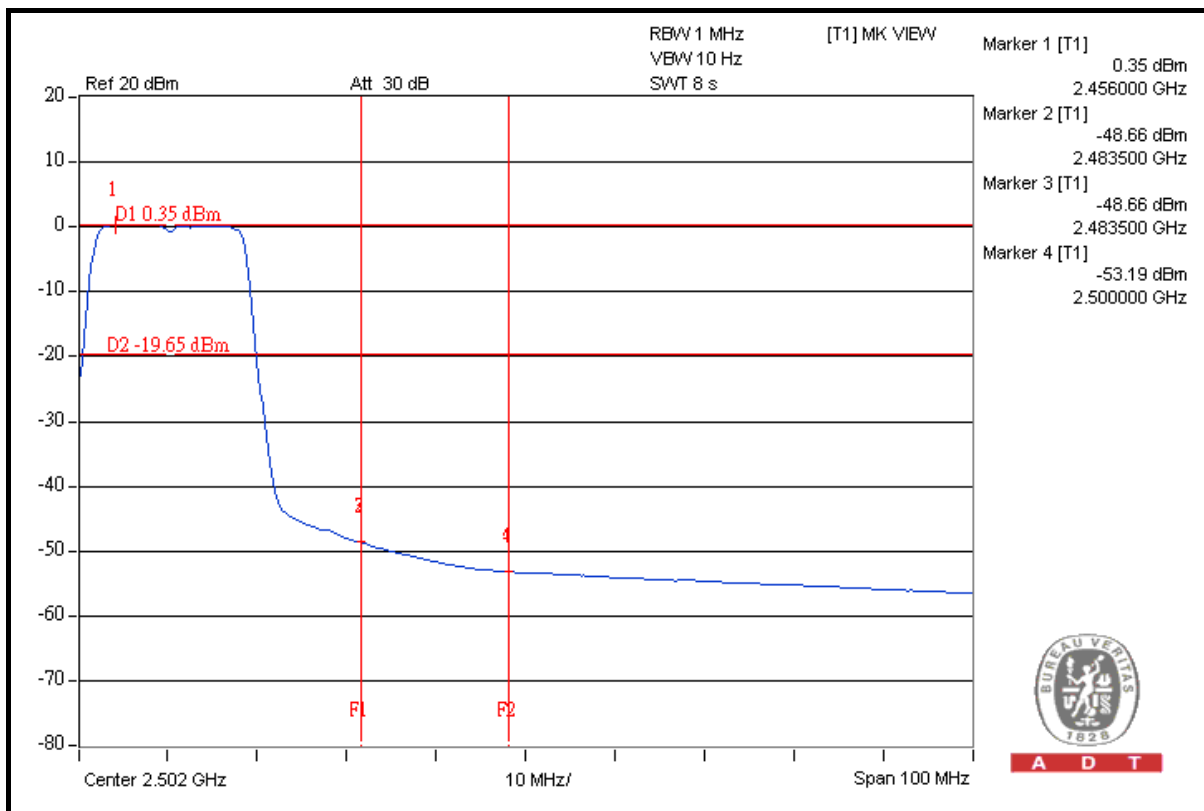

DRAFT 802.11n (20MHz) OFDM MODULATION

TEST MODE A

NOTE 1: The band edge emission plot on the next page shows 40.52dBc between carrier maximum power and local maximum emission in restrict band (2.3898GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 110.89dBuV/m (Peak), so the maximum field strength in restrict band is $110.89 - 40.52 = 70.37\text{dBuV/m}$ which is under 74dBuV/m limit.


The band edge emission plot on the next page shows 47.31dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 100.27dBuV/m (Average), so the maximum field strength in restrict band is $100.27 - 47.31 = 52.96\text{dBuV/m}$ which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 43.40dBc between carrier maximum power and local maximum emission in restrict band (2.4892GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 110.51dBuV/m (Peak), so the maximum field strength in restrict band is $110.51 - 43.40 = 67.11\text{dBuV/m}$ which is under 74dBuV/m limit.


The band edge emission plot on the next third page shows 47.15dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 99.99dBuV/m (Average), so the maximum field strength in restrict band is $99.99 - 47.15 = 52.84\text{dBuV/m}$ which is under 54dBuV/m limit.



A D T

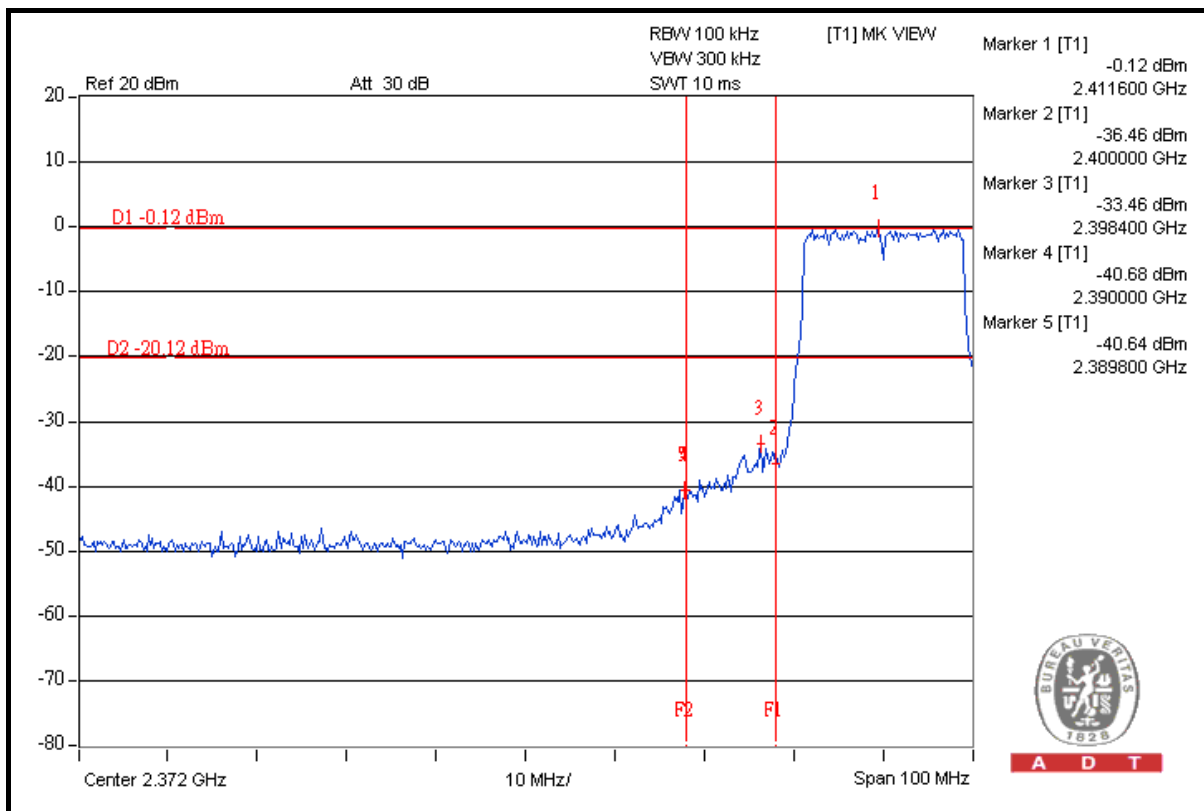



A D T

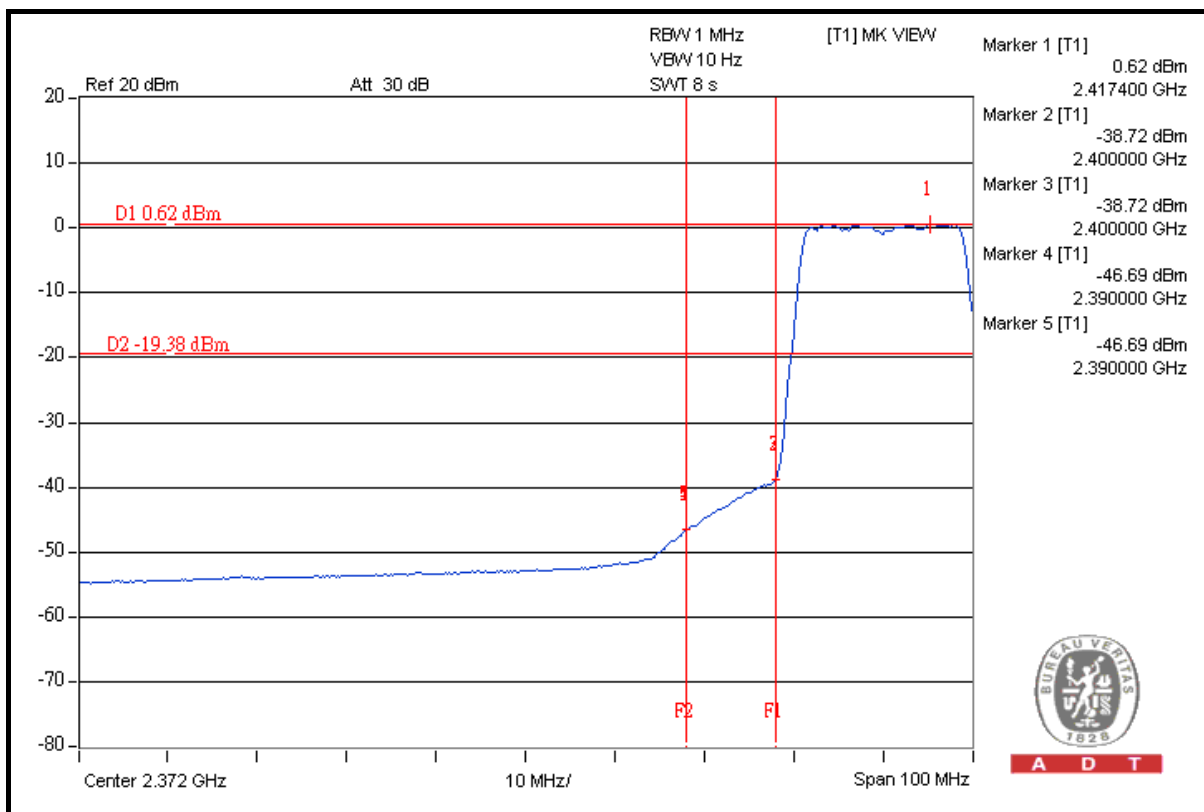

A D T





A D T

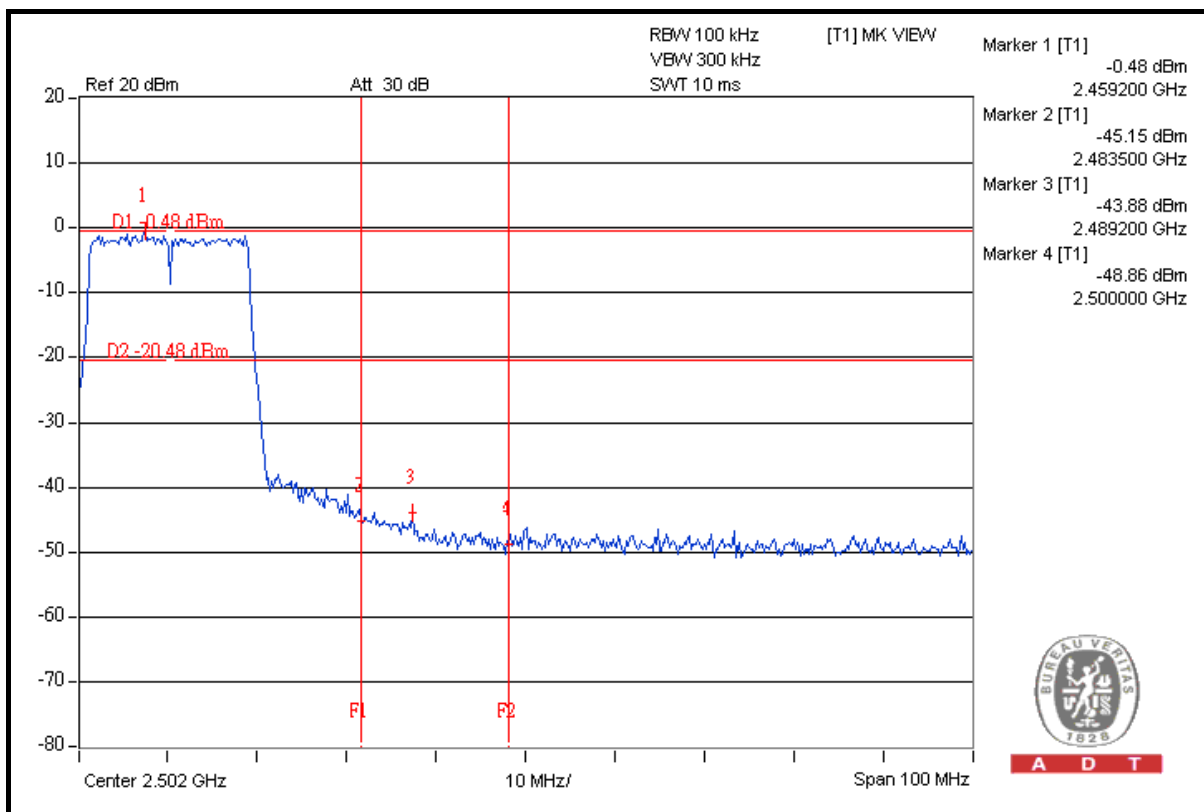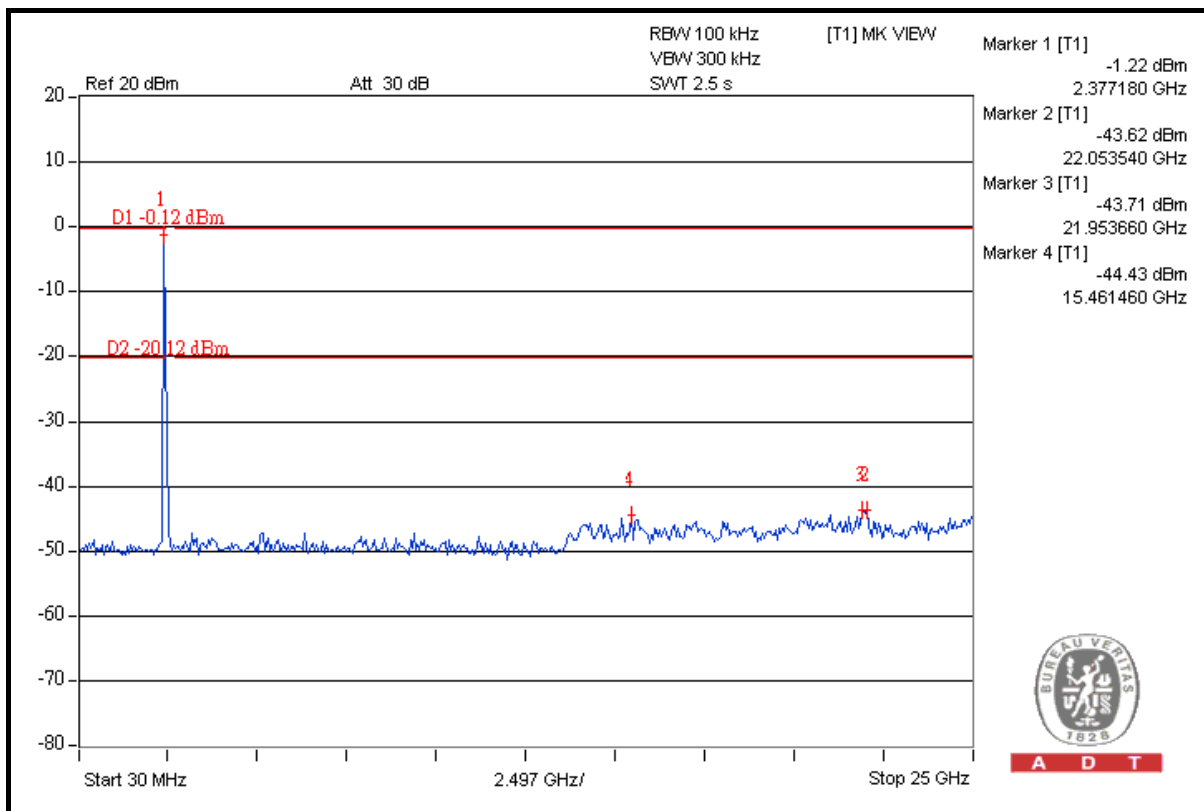



A D T

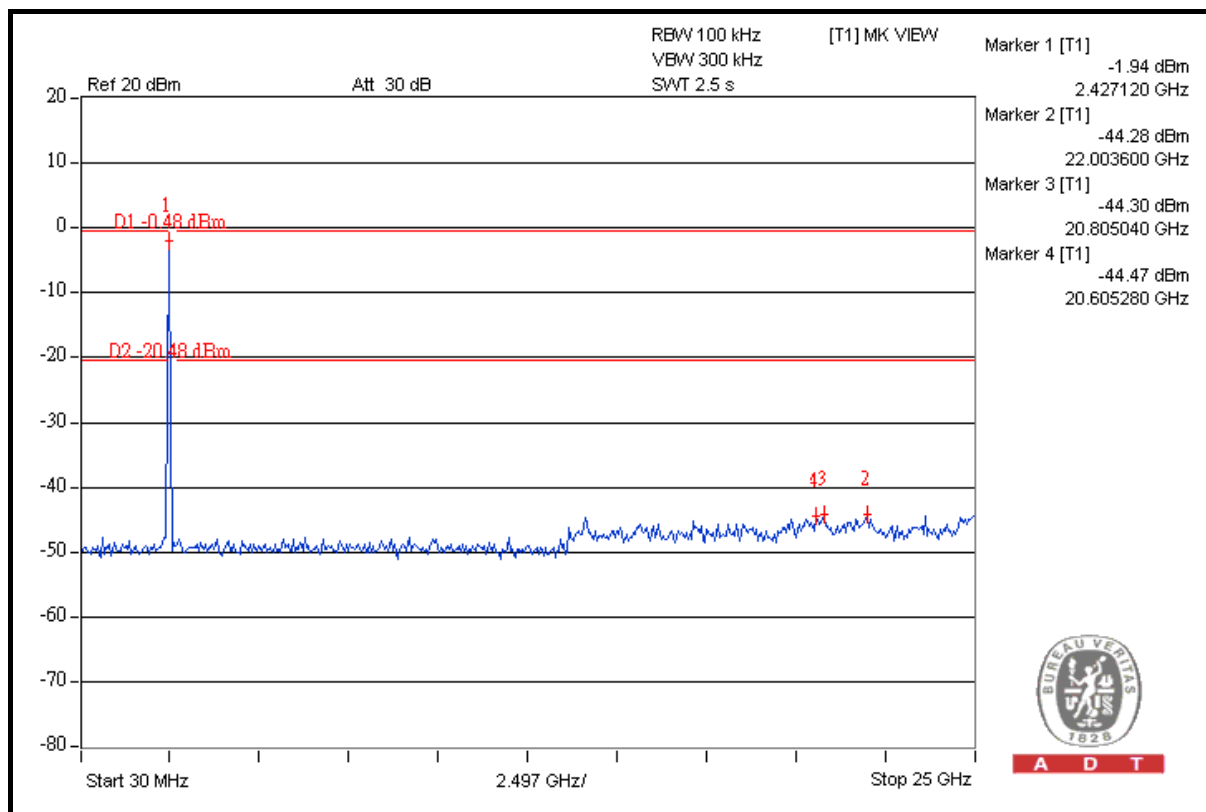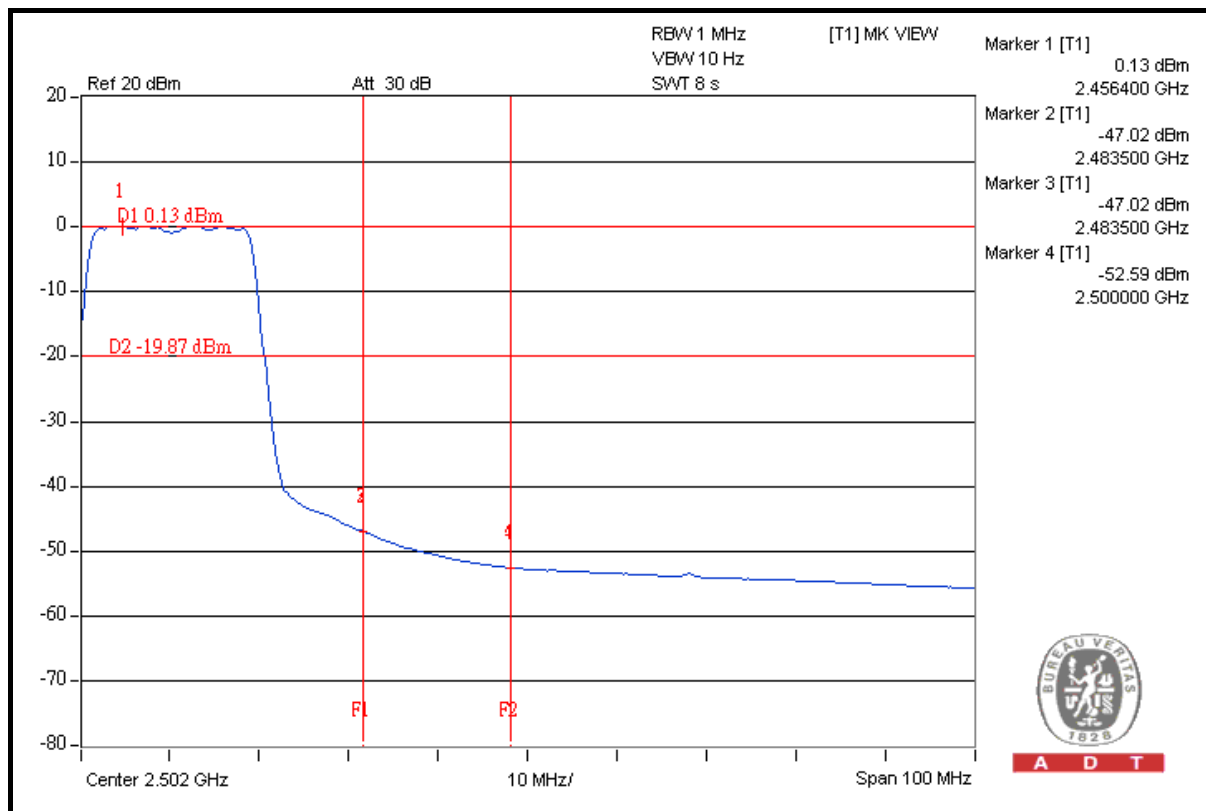

TEST MODE B

NOTE 1: The band edge emission plot on the next page shows 41.30dBc between carrier maximum power and local maximum emission in restrict band (2.3892GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 110.65dBuV/m (Peak), so the maximum field strength in restrict band is $110.65 - 41.30 = 69.35\text{dBuV/m}$ which is under 74dBuV/m limit.


The band edge emission plot on the next page shows 48.02dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 100.21dBuV/m (Average), so the maximum field strength in restrict band is $100.21 - 48.02 = 52.19\text{dBuV/m}$ which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 41.16dBc between carrier maximum power and local maximum emission in restrict band (2.4864GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 110.18dBuV/m (Peak), so the maximum field strength in restrict band is $110.18 - 41.16 = 69.02\text{dBuV/m}$ which is under 74dBuV/m limit.


The band edge emission plot on the next third page shows 48.55dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 99.78dBuV/m (Average), so the maximum field strength in restrict band is $99.78 - 48.55 = 51.23\text{dBuV/m}$ which is under 54dBuV/m limit.



A D T

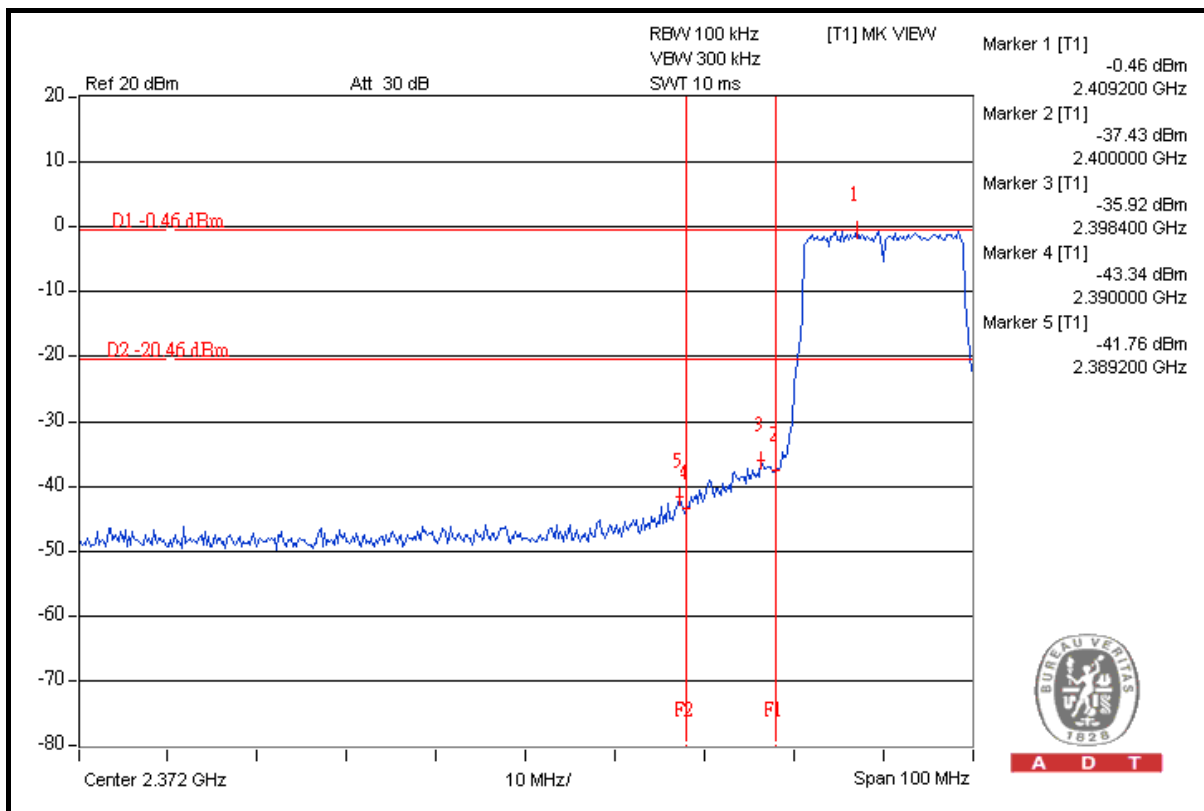



A D T

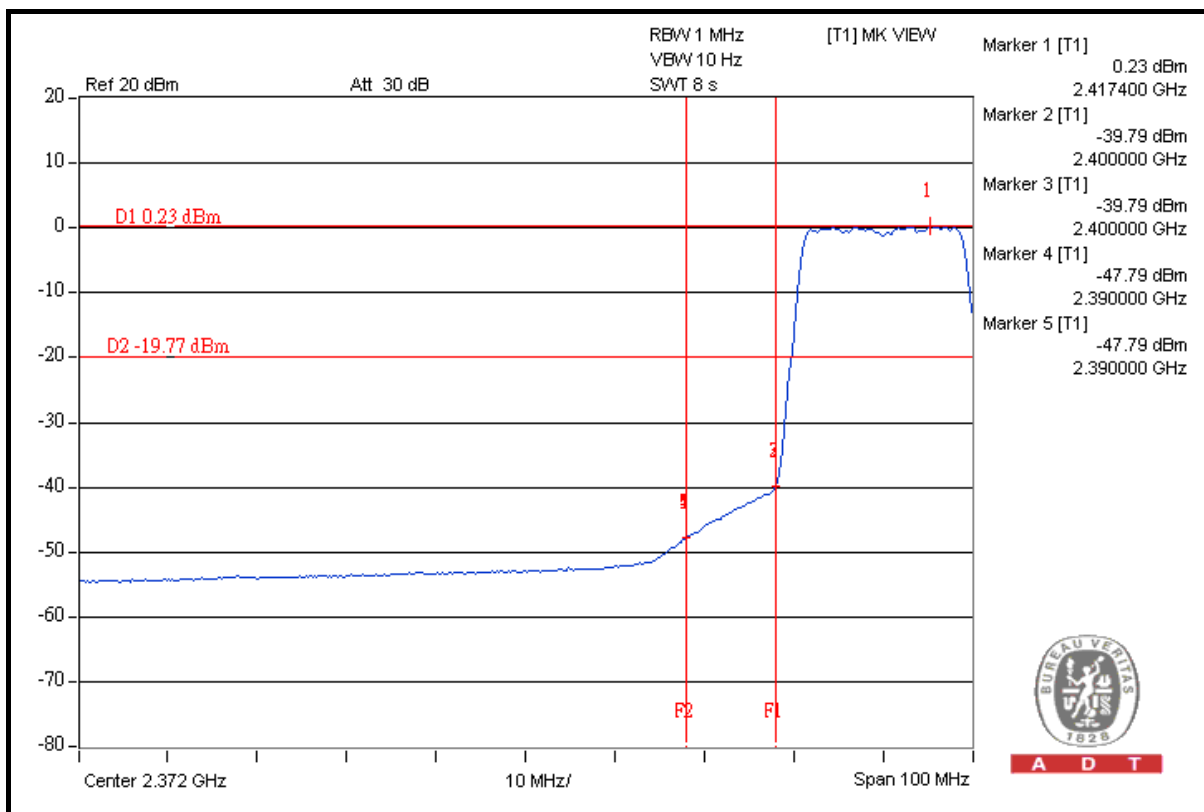

A D T





A D T

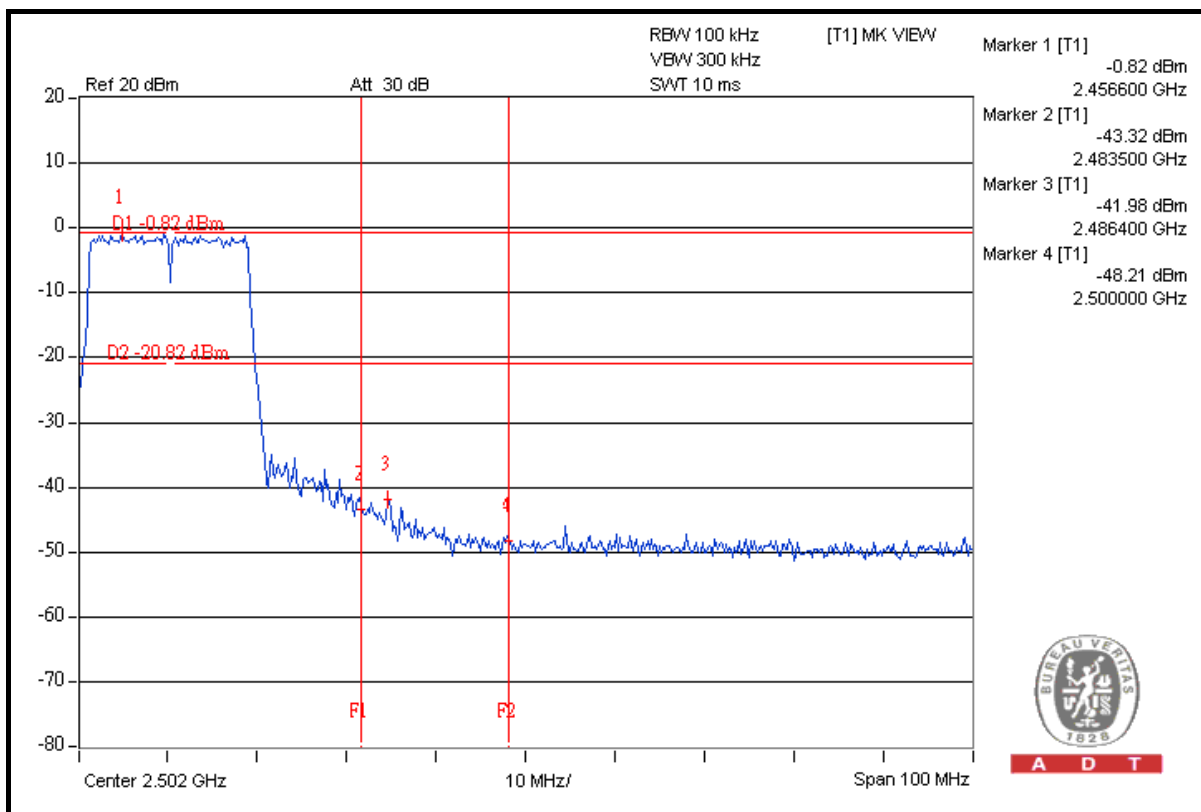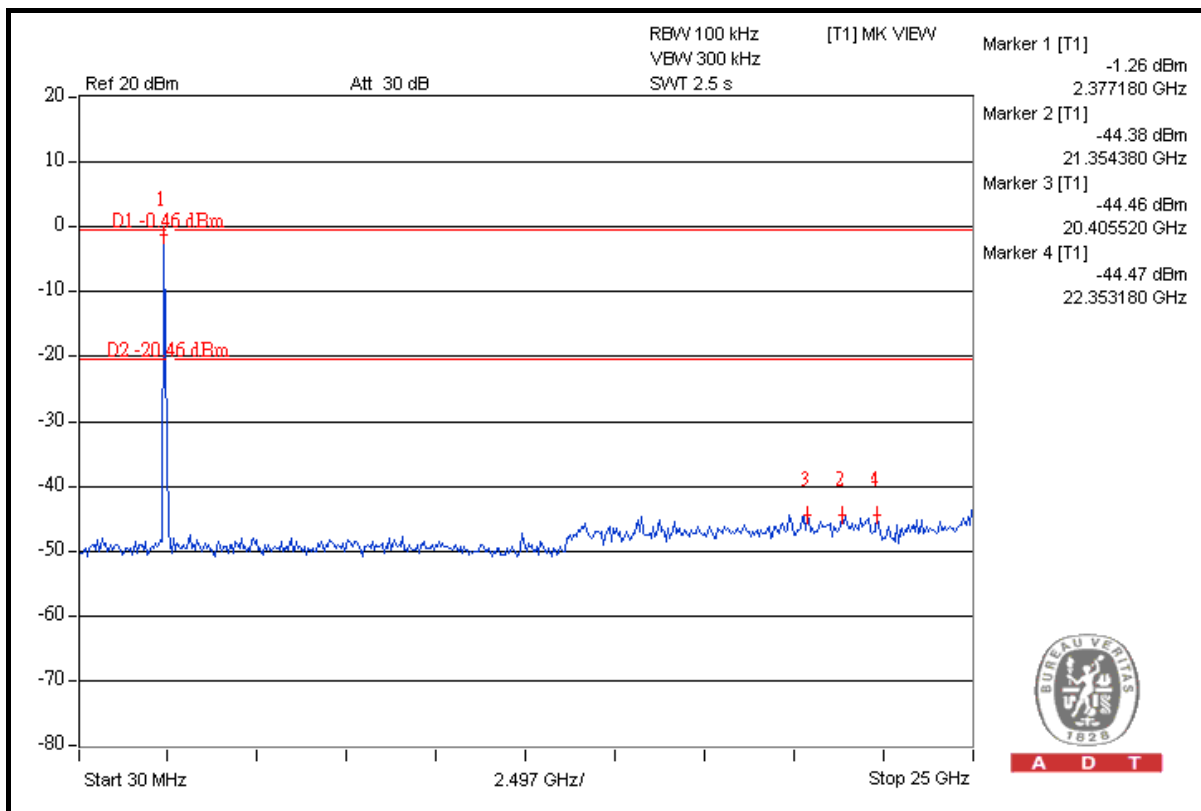



A D T

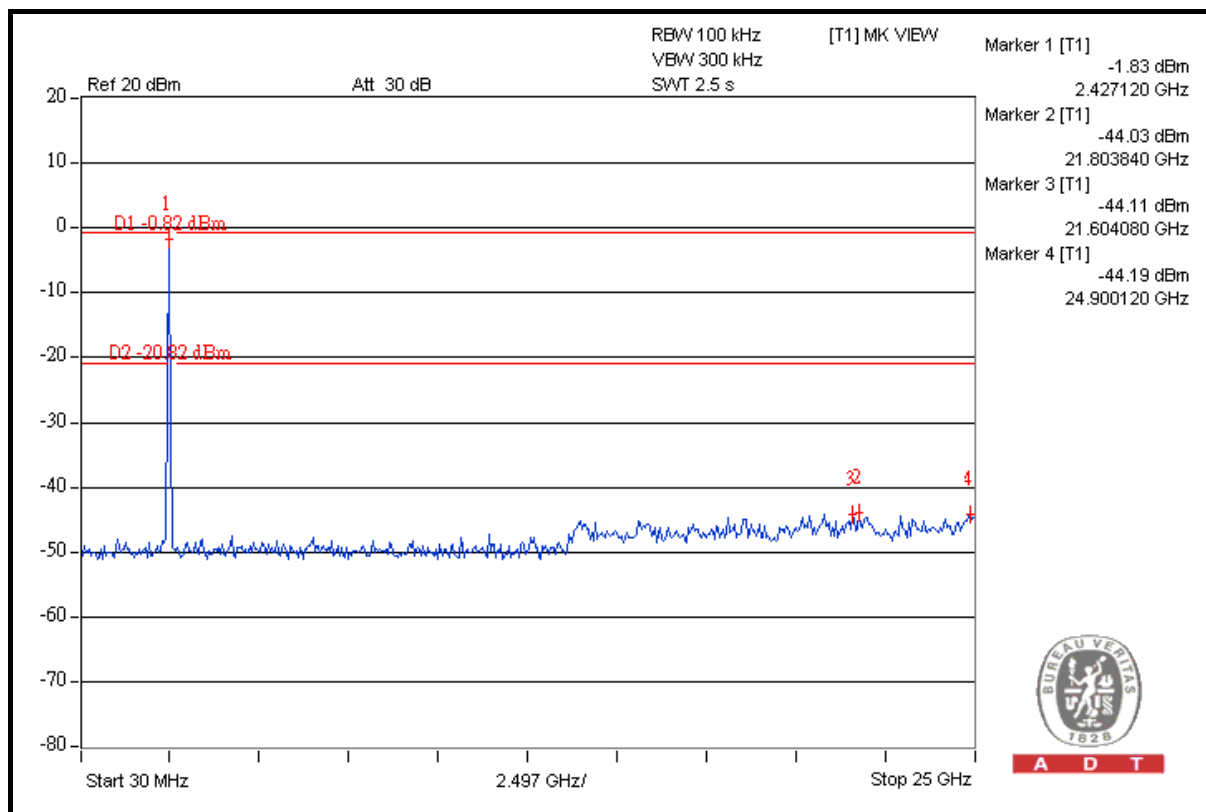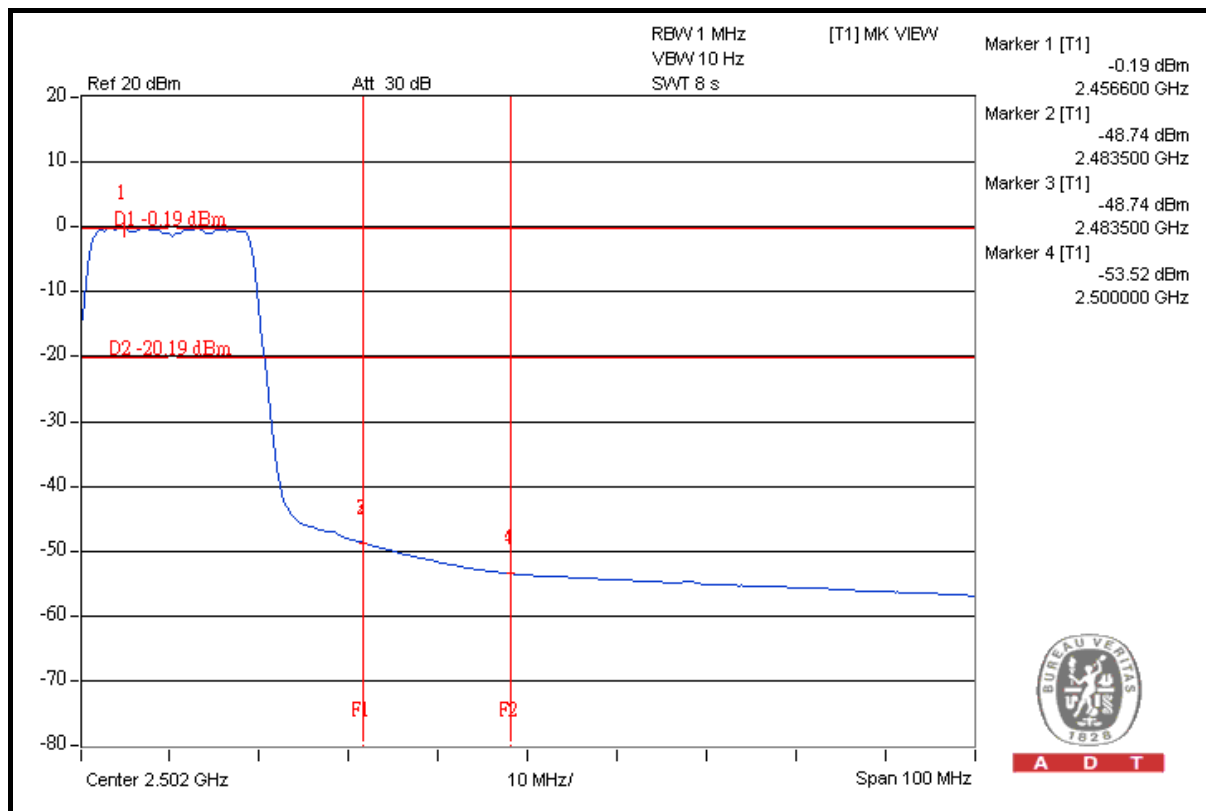

DRAFT 802.11n (40MHz) OFDM MODULATION

TEST MODE A

NOTE 1: The band edge emission plot on the next page shows 34.76dBc between carrier maximum power and local maximum emission in restrict band (2.3880GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 107.75dBuV/m (Peak), so the maximum field strength in restrict band is $107.75 - 34.76 = 72.99\text{dBuV/m}$ which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 44.68dBc between carrier maximum power and local maximum emission in restrict band (2.3892GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 97.67dBuV/m (Average), so the maximum field strength in restrict band is $97.67 - 44.68 = 52.99\text{dBuV/m}$ which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 38.31dBc between carrier maximum power and local maximum emission in restrict band (2.3836GHz). The emission of carrier strength list in the test result of channel 7 at the item 4.1.7 is 106.43dBuV/m (Peak), so the maximum field strength in restrict band is $106.43 - 38.31 = 68.12\text{dBuV/m}$ which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 43.76dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 7 at the item 4.1.7 is 96.22dBuV/m (Average), so the maximum field strength in restrict band is $96.22 - 43.76 = 52.46\text{dBuV/m}$ which is under 54dBuV/m limit.





A D T

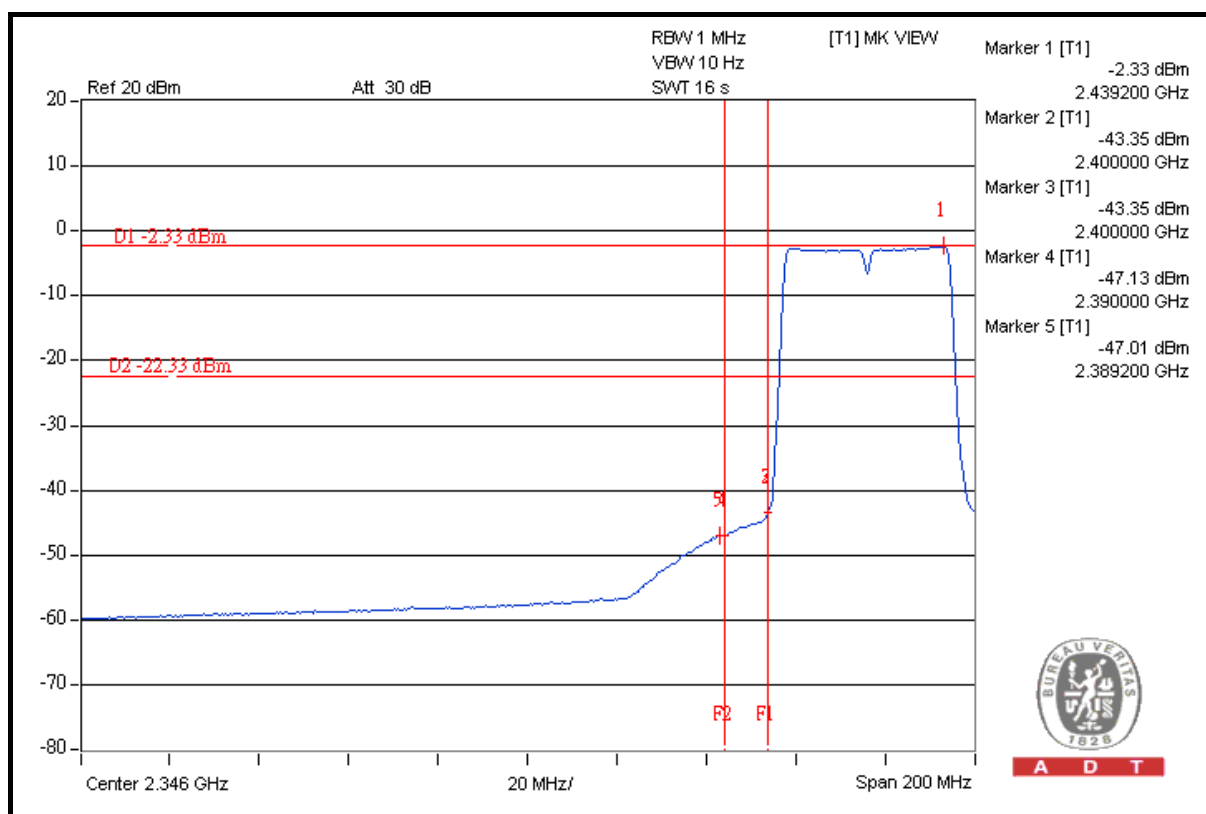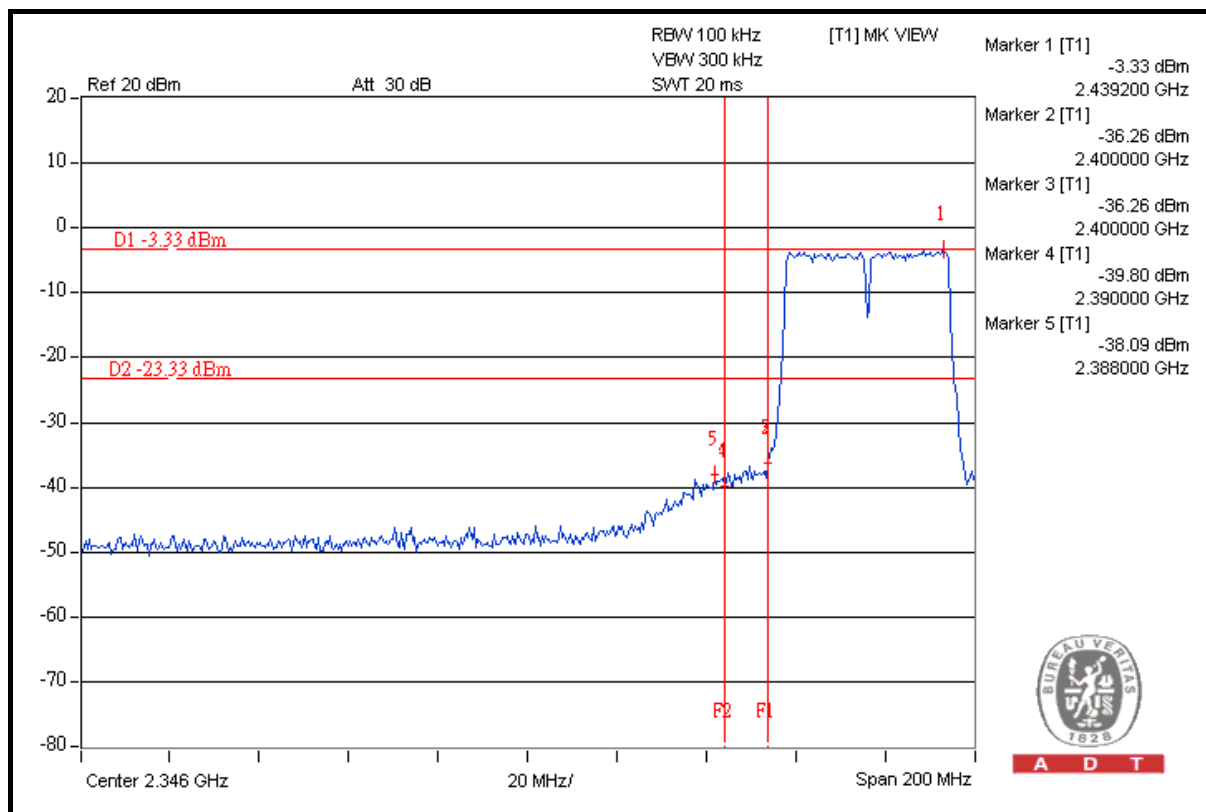





A D T

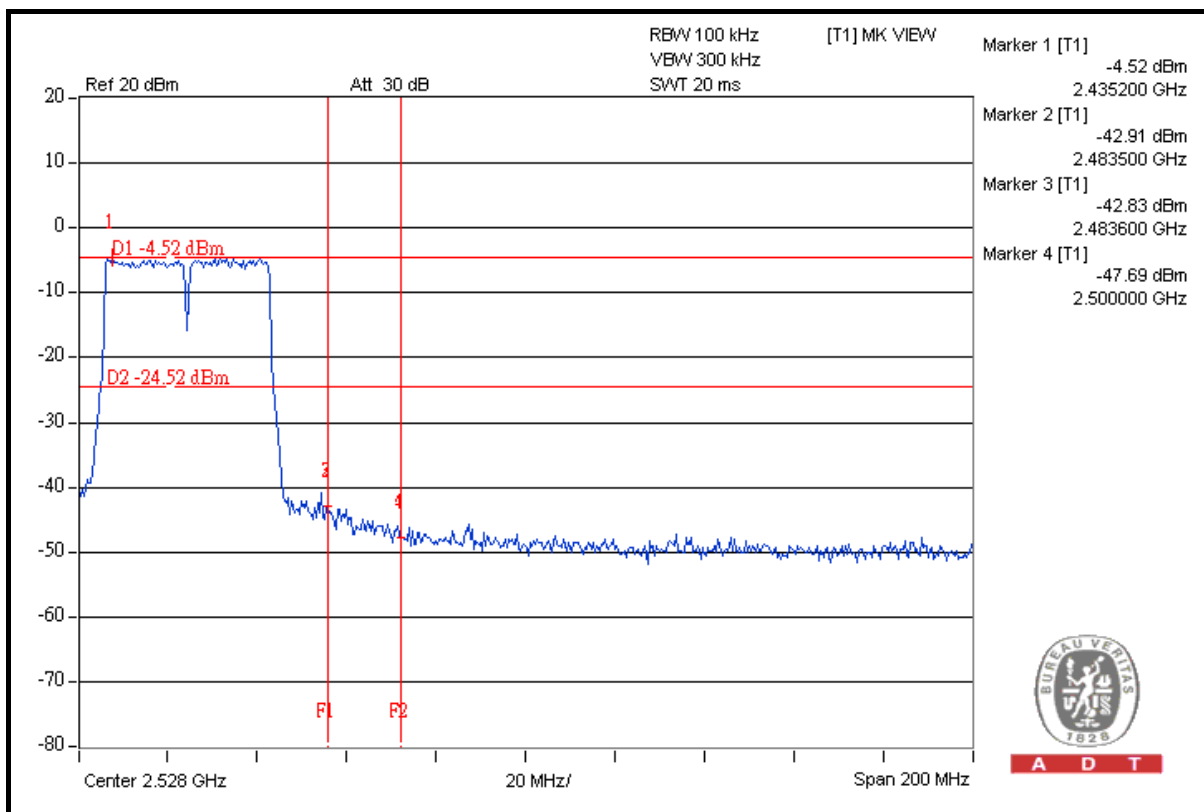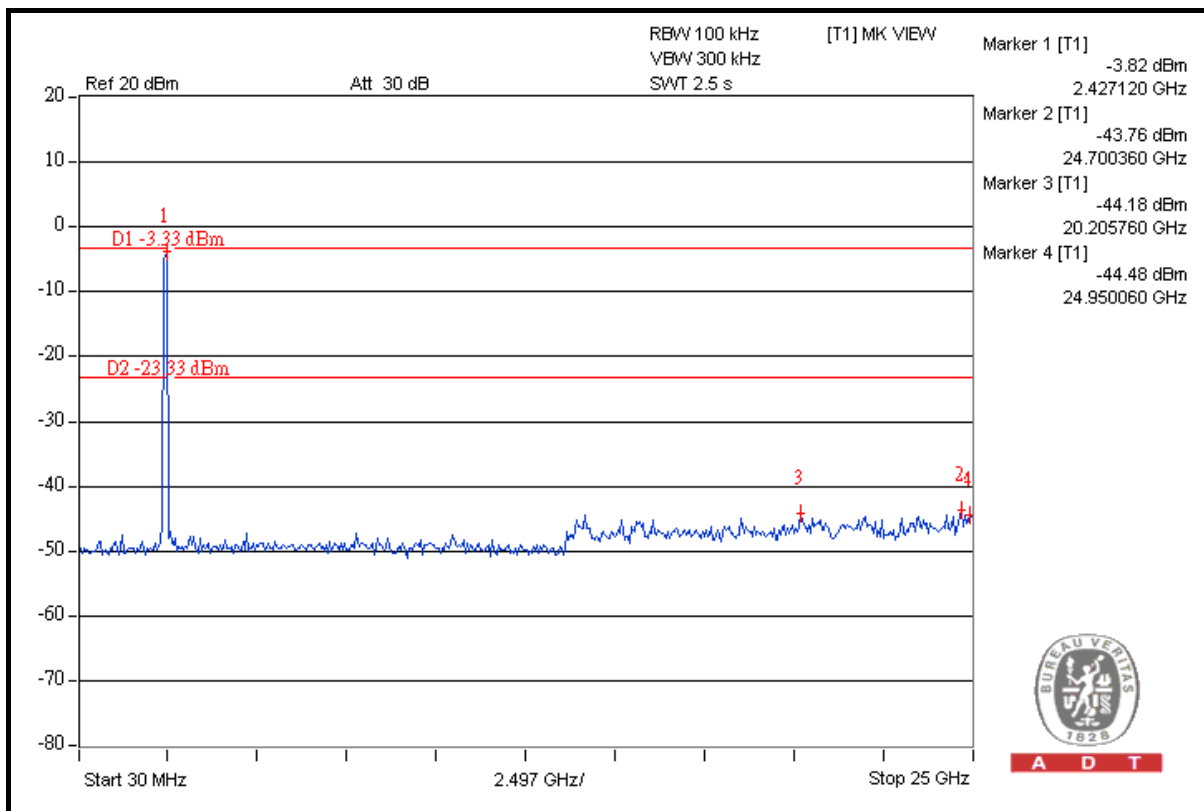



A D T

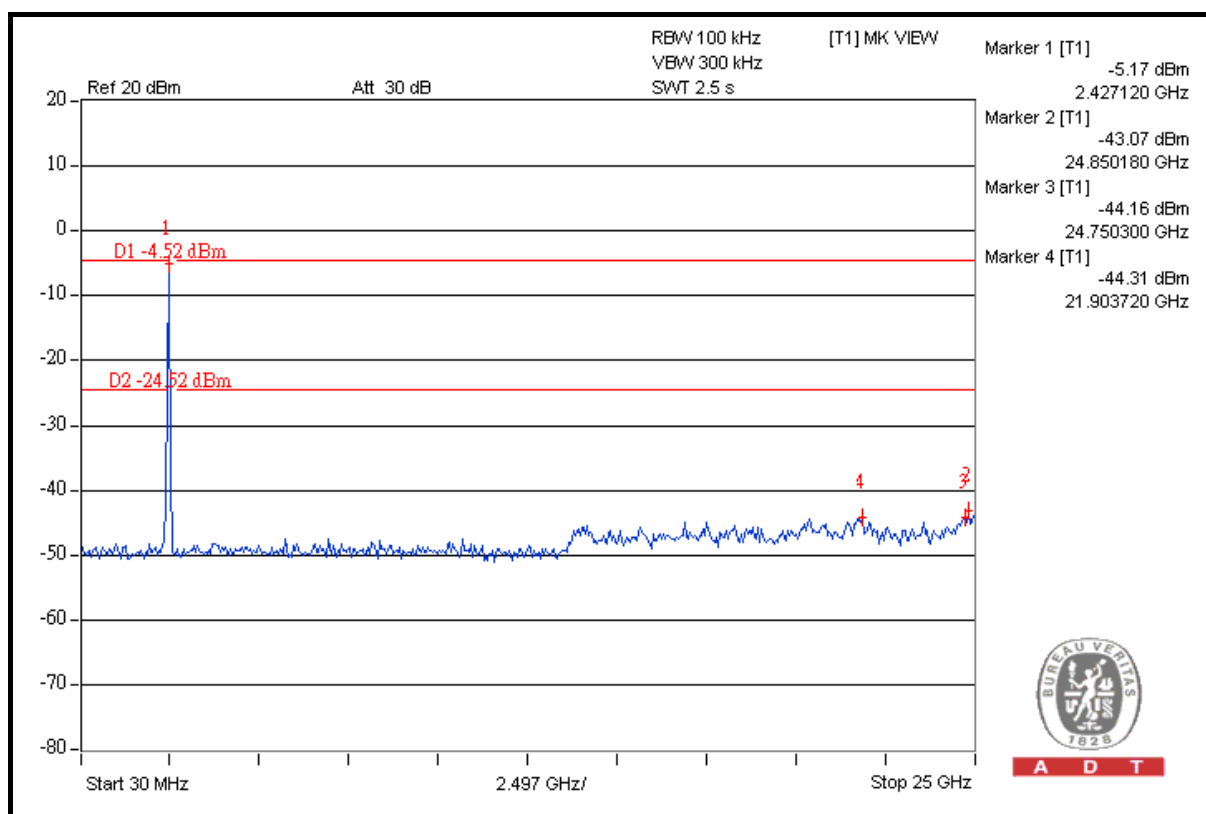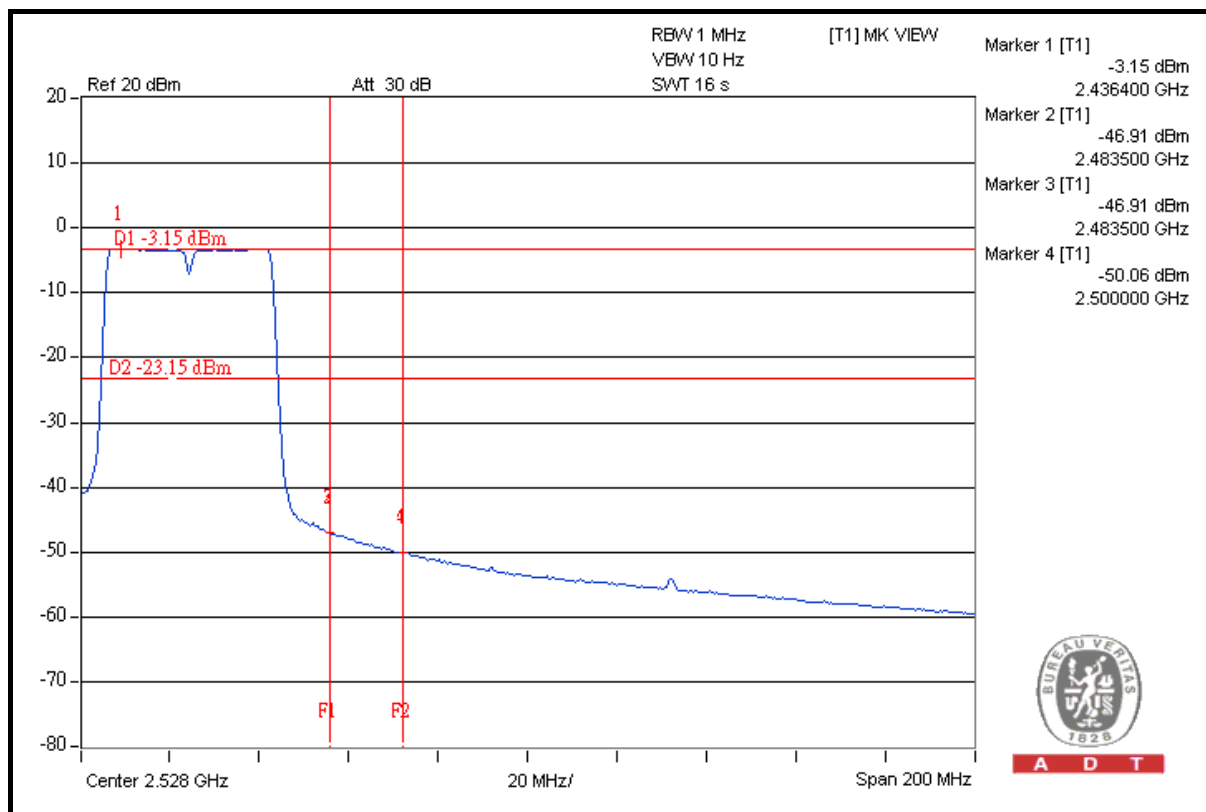

TEST MODE B

NOTE 1: The band edge emission plot on the next page shows 35.64dBc between carrier maximum power and local maximum emission in restrict band (2.3892GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 107.10dBuV/m (Peak), so the maximum field strength in restrict band is $107.10 - 35.64 = 71.46\text{dBuV/m}$ which is under 74dBuV/m limit.


The band edge emission plot on the next page shows 44.25dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 96.90dBuV/m (Average), so the maximum field strength in restrict band is $96.90 - 44.25 = 52.65\text{dBuV/m}$ which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 39.70dBc between carrier maximum power and local maximum emission in restrict band (2.4836GHz). The emission of carrier strength list in the test result of channel 7 at the item 4.1.7 is 106.04dBuV/m (Peak), so the maximum field strength in restrict band is $106.04 - 39.70 = 66.34\text{dBuV/m}$ which is under 74dBuV/m limit.


The band edge emission plot on the next third page shows 44.24dBc between carrier maximum power and local maximum emission in restrict band (2.4836GHz). The emission of carrier strength list in the test result of channel 7 at the item 4.1.7 is 95.20dBuV/m (Average), so the maximum field strength in restrict band is $95.20 - 44.24 = 50.96\text{dBuV/m}$ which is under 54dBuV/m limit.



A D T

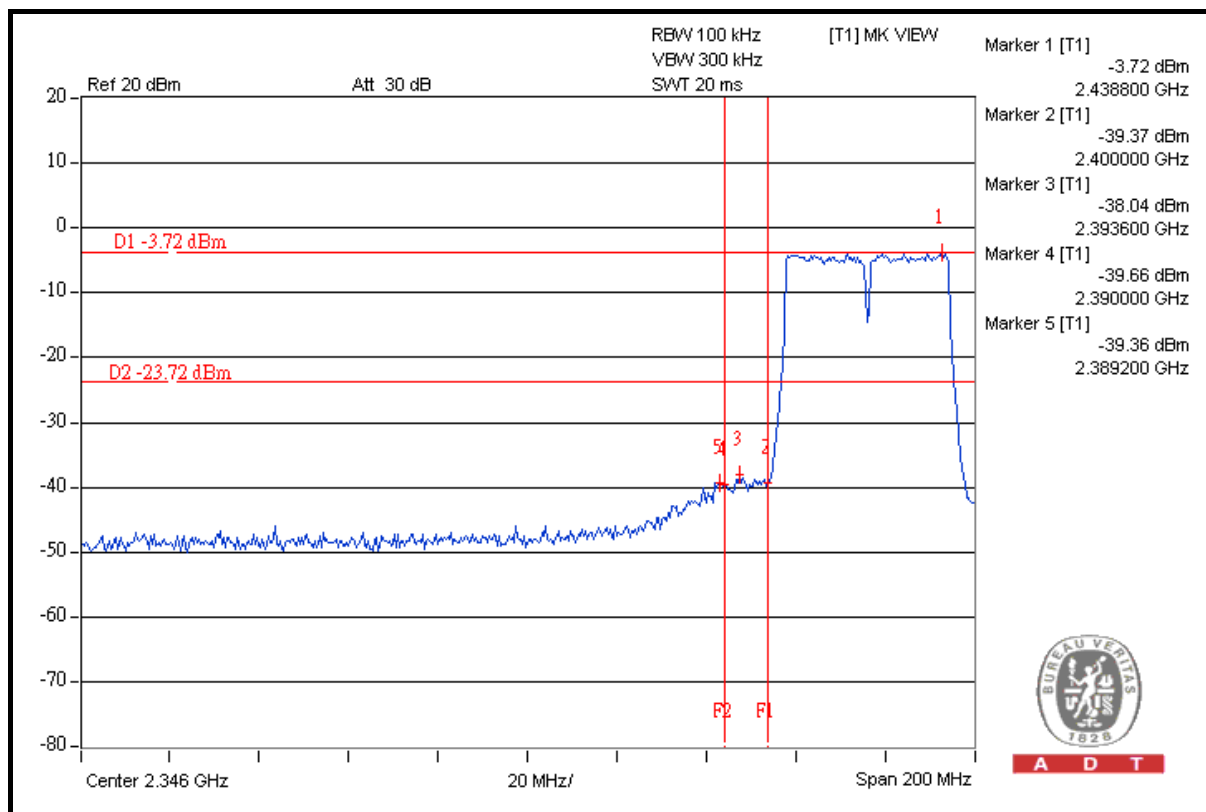



A D T

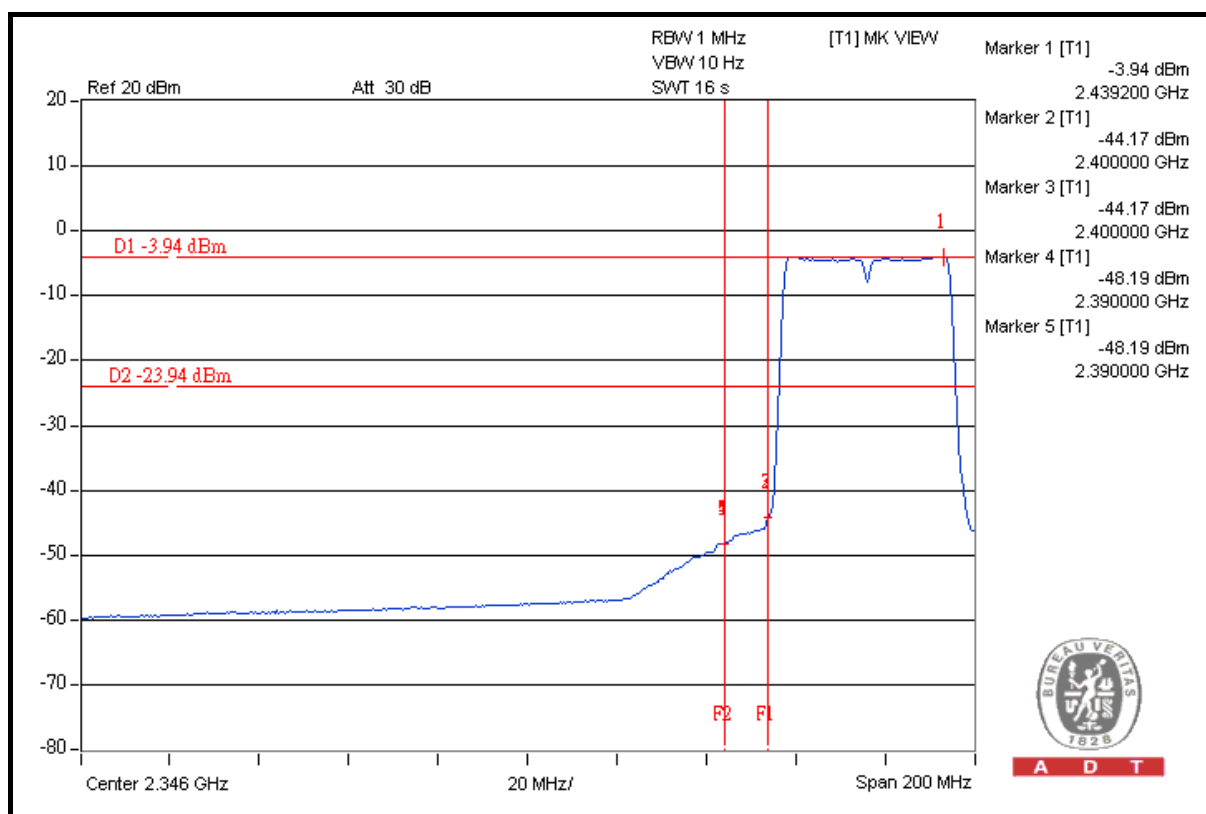

A D T




A D T

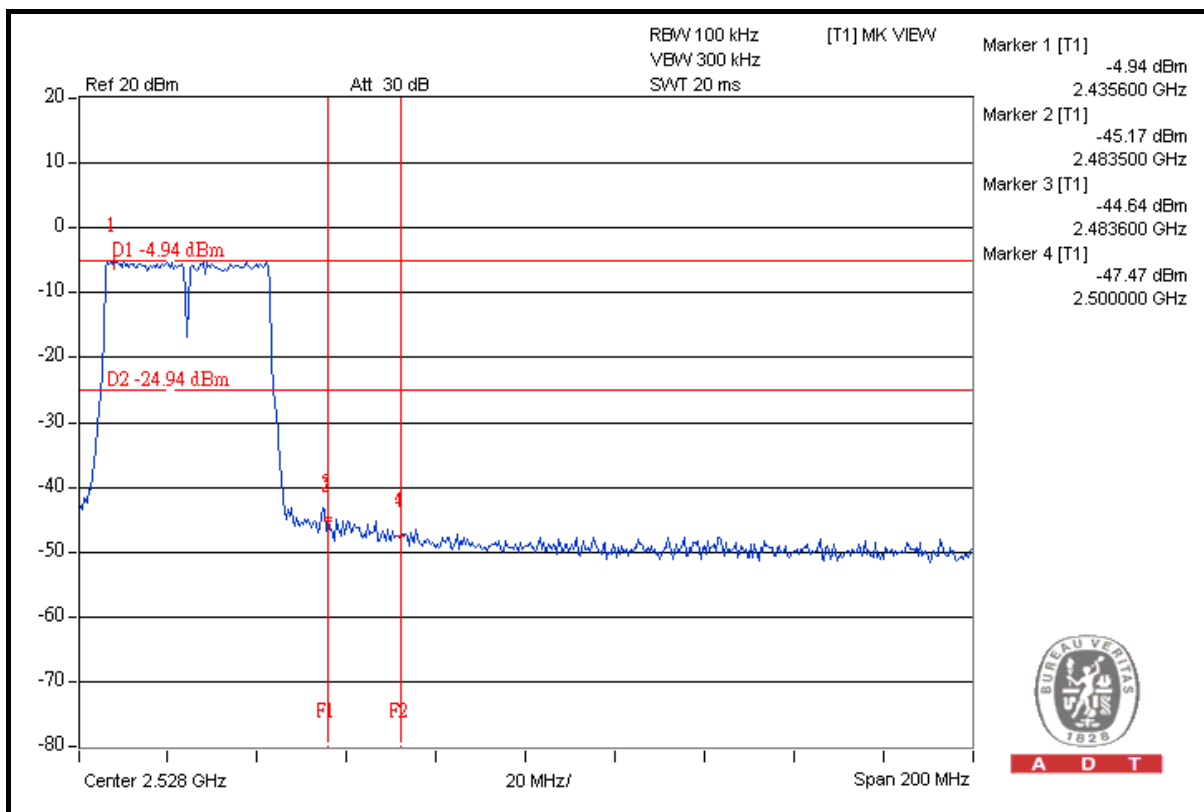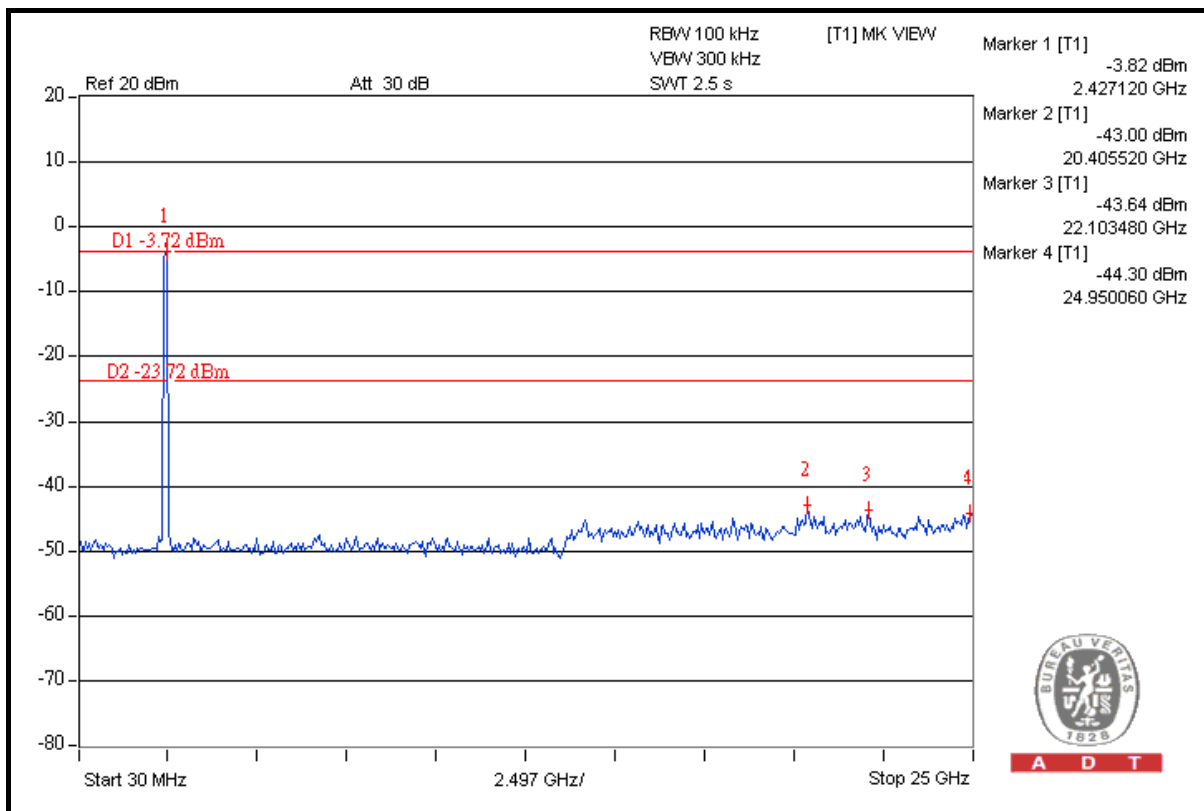




A D T

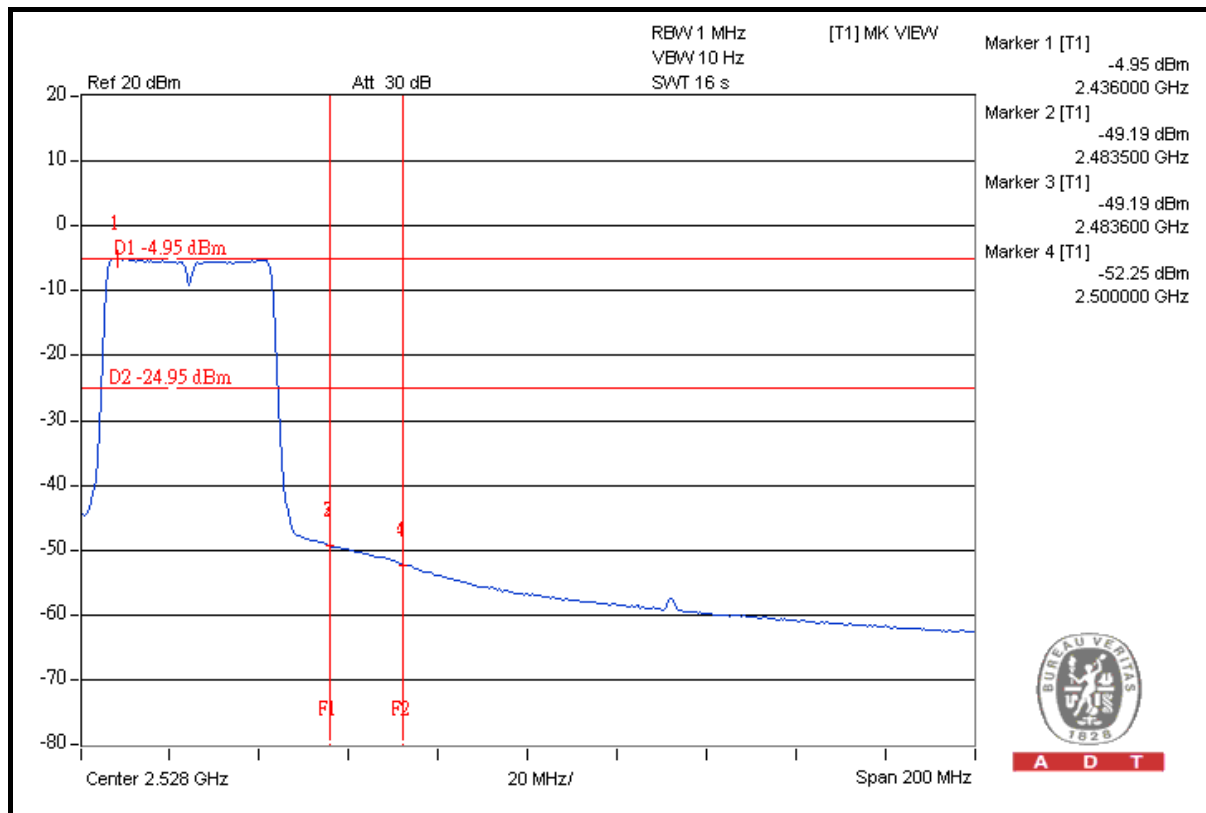

A D T

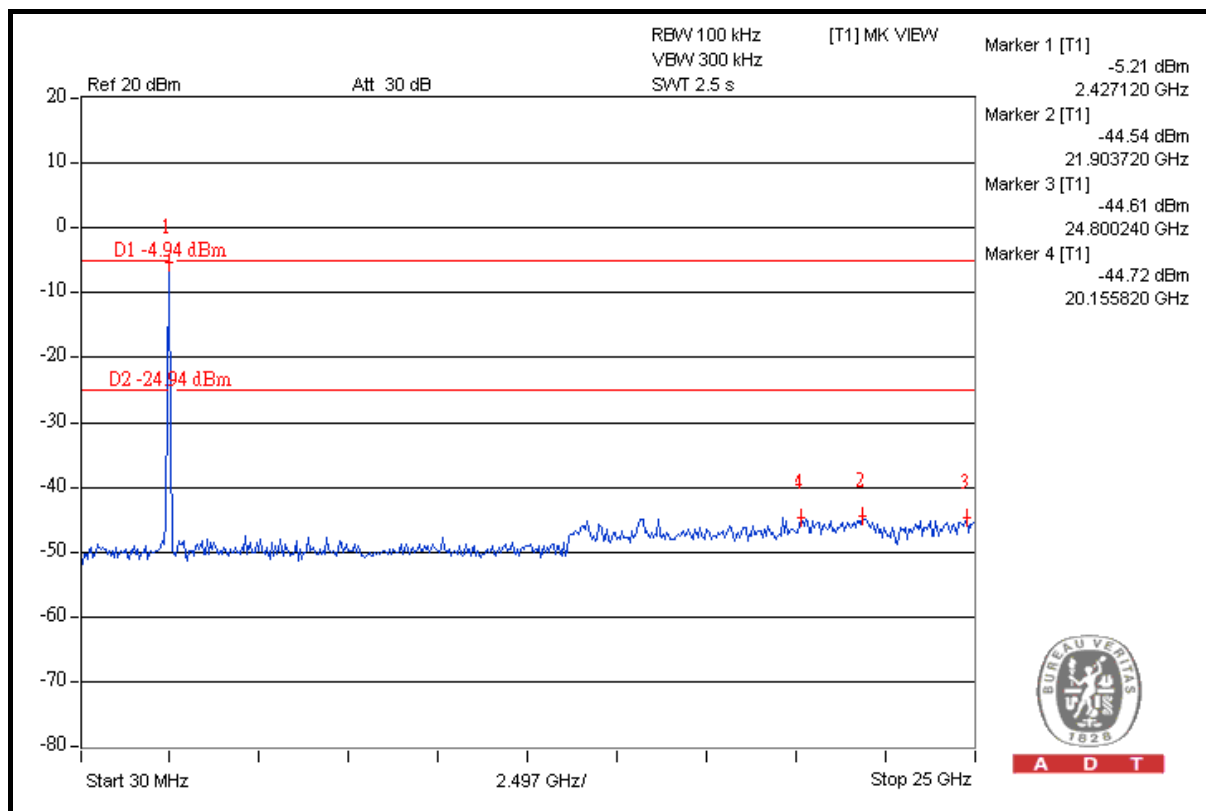

A D T

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is PCB PIFA antenna without antenna connector. The maximum Gain of the antenna is 2.2dBi.

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---