

Test of Hewlett Packard, SDG0B-1292

To: FCC 47 CFR Part 15, SubPart C 15.247 &  
RSS-210 Annex 8

Test Report Serial No.: MARS05-U1 Rev A



# TEST REPORT

From



**Test of:** Hewlett Packard, SDG0B-1292

**To:** FCC 47 CFR Part 15, SubPart C 15.247 & RSS-210 Annex 8

**Test Report Serial No.:** MARS05-U1 Rev A

This report supersedes: NONE

**Applicant:** Hewlett Packard Company  
3000 Hanover Street  
Palo Alto, California 94304  
USA

**Product Function:** Wireless Client

**Copy No:** pdf **Issue Date:** 16th July 2012

**This Test Report is Issued Under the Authority of:**

**MiCOM Labs, Inc.**  
440 Boulder Court, Suite 200  
Pleasanton, CA 94566 USA  
Phone: +1 (925) 462-0304  
Fax: +1 (925) 462-0306  
[www.micomlabs.com](http://www.micomlabs.com)



TESTING CERTIFICATE #2381.01

**MiCOM Labs is an ISO 17025 Accredited Testing Laboratory**



## TABLE OF CONTENTS

<b>1</b>	<b>ACCREDITATION, LISTINGS &amp; RECOGNITION .....</b>	<b>4</b>
1.1	TESTING ACCREDITATION .....	4
1.2	RECOGNITION .....	5
1.3	PRODUCT CERTIFICATION .....	6
<b>2</b>	<b>DOCUMENT HISTORY .....</b>	<b>7</b>
<b>3</b>	<b>TEST RESULT CERTIFICATE .....</b>	<b>8</b>
<b>4</b>	<b>REFERENCES AND MEASUREMENT UNCERTAINTY .....</b>	<b>9</b>
4.1	Normative References .....	9
4.2	Test and Uncertainty Procedures .....	10
<b>5</b>	<b>TEST SUMMARY .....</b>	<b>11</b>
<b>6</b>	<b>PRODUCT DETAILS AND TEST CONFIGURATIONS .....</b>	<b>12</b>
6.1	Test Program Scope .....	12
6.2	EUT Details .....	14
6.3	External A.C. / D.C. Power Adaptor .....	15
6.4	Operational Power Range .....	15
6.5	Types of Modulation Supported .....	16
6.6	Antenna Details .....	16
6.7	Cabling and I/O Ports .....	16
6.8	EUT Configurations .....	17
6.9	Equipment Details .....	17
6.10	Test Configurations .....	17
6.11	Equipment Modifications .....	17
6.12	Deviations from the Test Standard .....	17
<b>7</b>	<b>TEST RESULTS .....</b>	<b>18</b>
7.1	6 dB and 99% Bandwidth .....	18
7.2	Peak Output Power .....	36
7.3	Maximum Permissible Exposure .....	43
7.4	Peak Power Spectral Density .....	44
7.5	Conducted Spurious Emissions .....	62
7.6	Radiated Spurious Emissions .....	89
7.7	Conducted Disturbance at Mains Terminal (150 kHz – 30 MHz) .....	122
<b>8</b>	<b>Photographs .....</b>	<b>129</b>
8.1	Conducted RF Emissions - EUT .....	129
8.2	Transmitter Radiated Spurious Emission above 1 GHz .....	130
8.3	Transmitter Radiated Spurious Emission below 1 GHz .....	131
8.4	AC Wireline Emissions .....	132
<b>9</b>	<b>TEST EQUIPMENT DETAILS .....</b>	<b>133</b>

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## 1 ACCREDITATION, LISTINGS & RECOGNITION

### 1.1 TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard EN ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## 1.2 RECOGNITION

MiCOM Labs, Inc has widely recognized Electrical testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA\*\* countries. Our test reports are widely accepted for global type approvals.

Country	Recognition Body	Status	Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	Listing #: 4143A
Japan	MIC	CAB	APEC MRA 2	210
	VCCI	CAB	--	No. 2959
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

\*\*APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

N/A – Not Applicable

\*\*EU MRA – European Union Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the EU member countries.

\*\*NB – Notified Body

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 6 of 134

### 1.3 PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard EN ISO/IEC Guide 65. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



The American Association for Laboratory Accreditation

"World Class Accreditation"

## Accredited Product Certification Body

A2LA has accredited

**MICOM LABS**

*Pleasanton, CA*

for technical competence as a

Product Certification Body

This product certification body is accredited in accordance with the recognized International Standard ISO/IEC Guide 65:1996 *General requirements for bodies operating product certification systems*. This accreditation demonstrates technical competence for a defined scope and the operation of a quality management system.

Presented this 27<sup>th</sup> day of March 2012.



President & CEO  
For the Accreditation Council  
Certificate Number 2381.02  
Valid to November 30, 2013

*For the product certification schemes to which this accreditation applies, please refer to the organization's Product Certification Scope of Accreditation*

#### **United States of America – Telecommunication Certification Body (TCB)**

TCB Identifier – US0159

#### **Industry Canada – Certification Body**

CAB Identifier – US0159

#### **Europe – Notified Body**

Notified Body Identifier - 2280

#### **Japan – Recognized Certification Body (RCB)**

RCB Identifier - 210

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 7 of 134

---

## 2 DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft		
Rev A	16 <sup>th</sup> July 2012	Initial Release

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 8 of 134

### 3 TEST RESULT CERTIFICATE

Applicant:	Hewlett Packard Company 3000 Hanover Street Palo Alto California 94304 USA	Tested By:	MiCOM Labs, Inc. 440 Boulder Court Suite 200 Pleasanton California, 94566, USA
Product:	2.4 GHz WiFi Client	Telephone:	+1 925 462 0304
Model No.:	SDG0B-1292	Fax:	+1 925 462 0306
S/No's:	00 50 43 21 3E 4E		
Date(s) Tested:	16 <sup>th</sup> – 17 <sup>th</sup> November 2011 & 17 <sup>th</sup> – 23 <sup>rd</sup> May 2012	Website:	www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC 47 CFR Part 15, SubPart C 15.247 & RSS-210 Annex 8	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

**Notes:**

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:



TESTING CERTIFICATE #2381.01

Graeme Grieve  
Quality Manager MiCOM Labs, Inc.

Gordon Hurst  
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## 4 REFERENCES AND MEASUREMENT UNCERTAINTY

### 4.1 Normative References

Ref.	Publication	Year	Title
i.	FCC 47 CFR Part 15, SubPart C 15.247	2010	Title 47: Telecommunication PART 15—RADIO FREQUENCY DEVICES Subpart C—Intentional Radiators
ii.	RSS-210 Annex 8	2010	Radio Standards Specification 210, Issue 8, Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment,
iii.	RSS-GEN	2010	Radio Standards Specification-Gen, Issue 3, General Requirements and Information for the Certification of Radiocommunication Equipment,
iv.	47 CFR Part 15, SubPart B	2010	47 CFR Part 15, SubPart B; Unintentional Radiators
v.	ICES-003	2004	Spectrum Management and Telecommunications Policy Interference-Causing Equipment Standard Digital Apparatus; Issue 4
vi.	ANSI C63.4	2009	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
vii.	CISPR 22/ EN 55022	2008 2006+A1:2007	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
viii.	M 3003	Edition 1 Dec. 1997	Expression of Uncertainty and Confidence in Measurements
ix.	LAB34	Edition 1 Aug 2002	The expression of uncertainty in EMC Testing
x.	ETSI TR 100 028	2001	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
xi.	A2LA	March 2012	Reference to A2LA Accreditation Status – A2LA Advertising Policy

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 10 of 134

---

## 4.2 Test and Uncertainty Procedures

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## 5 TEST SUMMARY

**List of Measurements:** The following table represents the list of measurements required under FCC 47 CFR Part 15, SubPart C 15.247 & industry Canada RSS-210 Annex 8.

Standard Section(s)	Test Description	Condition	Result	Notes	Test Report Section
15.247 (a)(2)	6 dB Occupied Bandwidth	Conducted	PASS	Note 1,2,3	7.1
15.247 (b)(3), 15.247 (b)(4)	Peak Output Power	Conducted	PASS	Note 1,2,3	7.2
15.247 (i)	Maximum Permissible Exposure	Calculation	PASS	Note 1,2,3	7.3
15.247 (e)	Peak Power Spectral Density	Conducted	PASS	Note 1,2,3	7.4
15.247 (d)	Spurious Emissions	Conducted	PASS	Note 1,2,3	7.5
15.247 (d), 15.205, 15.209	Transmitter Radiated Spurious Emissions	Radiated	PASS	Note 1,2,3	7.6.1
15.247 (d), 15.205, 15.209	Radiated Band-Edge	Radiated	PASS	Note 1,2,3	7.6.2
RSS-GEN	Radiated Peak Emissions	Radiated	PASS	Note 1,2,3	7.6.3
RSS-GEN	Radiated Receiver Emissions	Radiated	PASS	Note 1,2,3	7.6.4
15.207	AC Wireline Emissions 0.15 – 30 MHz	Conducted		Not Tested – EUT Module Battery Powered	7.7

**Note 1:** Test results reported in this document relate only to the items tested

**Note 2:** The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

**Note 3:** Section 6.11 Equipment Modifications highlights the equipment modifications that were required to bring the product into compliance with the above test matrix



## 6 PRODUCT DETAILS AND TEST CONFIGURATIONS

### 6.1 Test Program Scope

The scope of the test program was to test the 802.11b/g/n Wi-Fi Client for compliance against FCC 47 CFR Part 15, SubPart C 15.247 & RSS-210 Annex 8.

	Brand	Product Name	Model #	Part #	Description
1	HP	802.11 b/g/n WLAN Module	SDGOB-1292	1150-7961	SDIO right angle, top mount
2	HP	802.11 b/g/n WLAN Module	SDGOB-1292	1150-7962	SDIO straight, bottom mount
3	HP	802.11 b/g/n WLAN Module	SDGOB-1291 (See NOTE 1)	1150-7958	USB right angle, top mount
4	HP	802.11 b/g/n WLAN Module	SDGOB-1291 (See NOTE 1)	1150-7959	USB straight, bottom mount

NOTE 1;-Test results for the SDGOB-1291 WLAN module are reported in MiCOM Labs test report MARS03-U1 Rev A published on the 26<sup>th</sup> January 2012.

### EUT

The SDGOB-1292 module is electrically identical to the SDGOB-1291 WLAN module with the exception of the interface to connect to a host device. This report uses conducted data previously reported in MiCOM Labs test report MARS03-U1 Rev A published on the 26<sup>th</sup> January 2012.

The 2 Part numbers 1150-7961 and 1150-7962 identified in the table above have the same radio module and antenna; the only difference is the digital input interface and the way they are mounted.

Both Main and Aux Antenna of the EUT were investigated for output power and radiated emissions (harmonics and bandedge), it was determined that the main antenna on Part # 1150-7962 is the worst case of the 4 parts in the above table. Therefore, final testing was done on the main antenna on Part # 1150-7962.

APPLICANT: Hewlett-Packard

PRODUCT: 2.4 GHz Wi-Fi Client



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 14 of 134

## 6.2 EUT Details

Detail	Description
Purpose:	Test of the Hewlett-Packard 2.4 GHz Wi-Fi Client SDG0B-1292 for compliance against FCC 47 CFR Part 15, SubPart C 15.247 & RSS-210 Annex 8
Applicant:	Hewlett Packard Company 3000 Hanover Street Palo Alto California 94304 USA
Manufacturer:	As Applicant
Test Laboratory:	MiCOM Labs, Inc. 440 Boulder Court, Suite 200 Pleasanton, California 94566 USA
Test report reference number:	MARS03-U1
Dates of test (from - to):	16th – 17th November 2011 & 17th – 23rd May 2012.
No of Units Tested:	1
Product Name:	802.11 b/g/n WLAN Module
Manufacturers Trade Name:	Hewlett Packard Company
Model No.:	SDGOB-1292
Part numbers:	1150-7961 and 1150-7962
Equipment Primary Function:	Wi-Fi client for use in printers
Equipment Secondary Function(s):	Not provided
Type of Technology:	802.11b/g/n
Installation type:	Fixed
Construction/Location for Use:	Indoor only
Hardware Release:	2
Software/Firmware Release:	Linux supported with drivers based on Fedora Core 13
Rated Input Voltage and Current DC:	Powered by Host Nominal:3.3 Vdc; Extremes: 2.97 – 3.63 Vdc
Operating Temperature Range °C:	Min: 0 °C Max: +55 °C
Equipment Dimensions:	44.5x40x1 mm
Weight:	4 grams
ITU Emission Designator:	2400 – 2483.5 MHz 802.11b - 13M8G1D 2400 – 2483.5 MHz 802.11g - 16M5D1D 2400 – 2483.5 MHz 802.11n HT-20 - 17M7D1D 2400 – 2483.5 MHz 802.11n HT-40 - 36M4D1D
Transmit/Receive Operation:	Full Duplex
Output Power Type	Fixed

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 6.3 External A.C. / D.C. Power Adaptor

1. NONE – EUT powered by host device.

Model	Description

### 6.4 Operational Power Range

The Band edge utility settings used during the test were provided by the customer.

Fundamental Frequency (MHz)	Utility Setting Used During Tests	Measured Output Power (dBm)	TX SPR: Utility Setting Used During Test	Band Edge: Utility Setting Used During Test
<b>802.11b</b>	Conducted RF Emissions		Radiated RF Emissions	
2412	Max	11.26	Max	18
2437	Max	12.03	Max	
2462	Max	11.68	Max	18

<b>802.11g</b>		Conducted RF Emissions		Radiated RF Emissions	
2412	Max	10.19	Max	14	
2437	Max	10.60	Max		
2462	Reduction	10.80	Max	14	

<b>802.11n HT-20</b>		Conducted RF Emissions		Radiated RF Emissions	
2412	Max	10.19	Max	13	
2437	Max	10.60	Max		
2462	Reduction	10.80	Max	13	

<b>802.11n HT-40</b>		Conducted RF Emissions		Radiated RF Emissions	
2412	Max	10.19	Max	13	
2437	Max	10.60	Max		
2462	Reduction	10.80	Max	10	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## 6.5 Types of Modulation Supported

Modulation / Mode	BW 1
802.11b	DSSS/CCK
802.11g	OFDM
802.11n HT-20	OFDM
802.11n HT-40	OFDM

## 6.6 Antenna Details

The following is a description of the EUT antennas.

Antenna Type	Manufacturer	Model	Gain (dBi)	Frequency Range
PCB Embedded	Hewlett-Packard	1	2.5	2400-2500

## 6.7 Cabling and I/O Ports

The following is a description of the cable and input, output ports available on the EUT.

1. NONE – module had no external cabling or I/O ports

Type of I/O Ports	Description	Screened (Y/N)	Length	Qty	Tested (Y/N)



## 6.8 EUT Configurations

### Channel plan and spacing

Band (GHz)	Mode	Freq Band (MHz)	Freq Range (MHz)	Low Ch	Mid Ch	High Ch	# Ch	Ch Spacing (MHz)
2.4	802.11b	2400-2483.5	2412 - 2462	2412	2437	2462	11	5
2.4	802.11g	2400-2483.5	2412 - 2462	2412	2437	2462	11	5
2.4	802.11HT-20	2400-2483.5	2412 - 2462	2412	2437	2462	11	5
2.4	802.11HT-40	2400-2483.5	2422 - 2452	2422	2437	2452	7	5

## 6.9 Equipment Details

The following is a description of supporting equipment used during the test program.

Equipment	Equipment Description	Manufacturer	Model No.	Serial No (s).	Tested
Computer	Laptop	IBM			

## 6.10 Test Configurations

Operational Mode(s)	Data Rate Tested	Duty Cycle
b	1 MBit/s	100 %
g	6 MBit/s	100 %
n Ht-20	6.5 MBit/s	100 %
n Ht-40	13.5 MBit/s	100 %

## 6.11 Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

## 6.12 Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

## 7 TEST RESULTS


### 7.1 6 dB and 99% Bandwidth

#### Test Procedure

The test methodology and conditions utilized for each measurement is referenced in the following test results matrix. 6 dB and 99% bandwidth were measured per the Test Configuration identified below.

Testing was restricted to a single port.

#### Test Configuration

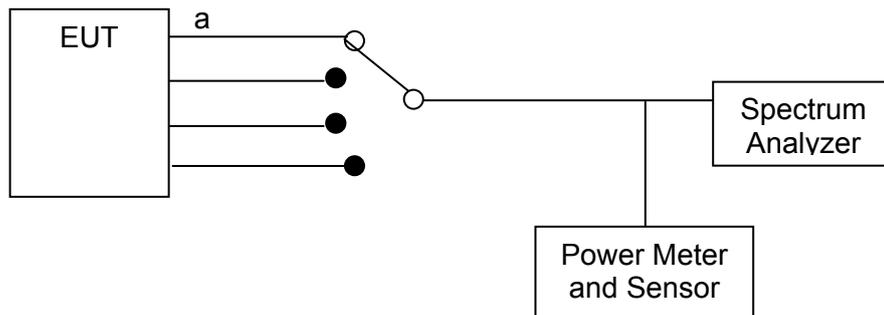

Test setup for 6 dB & 99% Bandwidth



### Specification for 6dB Bandwidth Limits

#### FCC §15.247 (a)(2)

The minimum 6 dB bandwidth shall be at least 500 kHz.

#### Industry Canada RSS-210 §A8.2 (a)

These include systems that employ digital modulation techniques resulting in spectral characteristics similar to direct sequence systems. The following applies to all three bands:

(a) The minimum -6 dB bandwidth shall be at least 500 kHz.

### Traceability

Method	Test Equipment Used
WI-03	0158, 0252, 0313, 0314, 0116, 0117, 0287, 0363

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 20 of 134

**7.1.1 6 dB and 99% Bandwidth Results: 802.11b**

<b>Test Conditions:</b>	15.247 (a)(2)	<b>Rel. Humidity (%):</b>	35 to 42
<b>Variant:</b>	802.11b	<b>Ambient Temp. (°C):</b>	19 to 22
<b>TPC:</b>	HIGH	<b>Pressure (mBars):</b>	998 to 1003
<b>Modulation:</b>	ON	<b>Duty Cycle (%):</b>	100
<b>Beam Forming Gain (Y):</b>	N/A dB	<b>Antenna Gain:</b>	2.5 dBi
<b>Applied Voltage:</b>	3.30 Vdc		
<b>Notes 1:</b>			
<b>Notes 2:</b>			

**6 dB Bandwidth**


Test Frequency	6 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz				kHz	MHz	
MHz	a	b	c	d			
2412.000	10.100000	--	--	--	500	0.5	-9.600000
2437.000	10.100000	--	--	--			-9.600000
2462.000	10.100000	--	--	--			-9.600000

**99% Bandwidth**

Test Frequency	99 % Bandwidth					
	MHz					
MHz	a	b	c	d		
2412.000	13.707000	--	--	--		
2437.000	13.788000	--	--	--		
2462.000	13.788000	--	--	--		


<b>Measurement uncertainty:</b>	±2.81 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

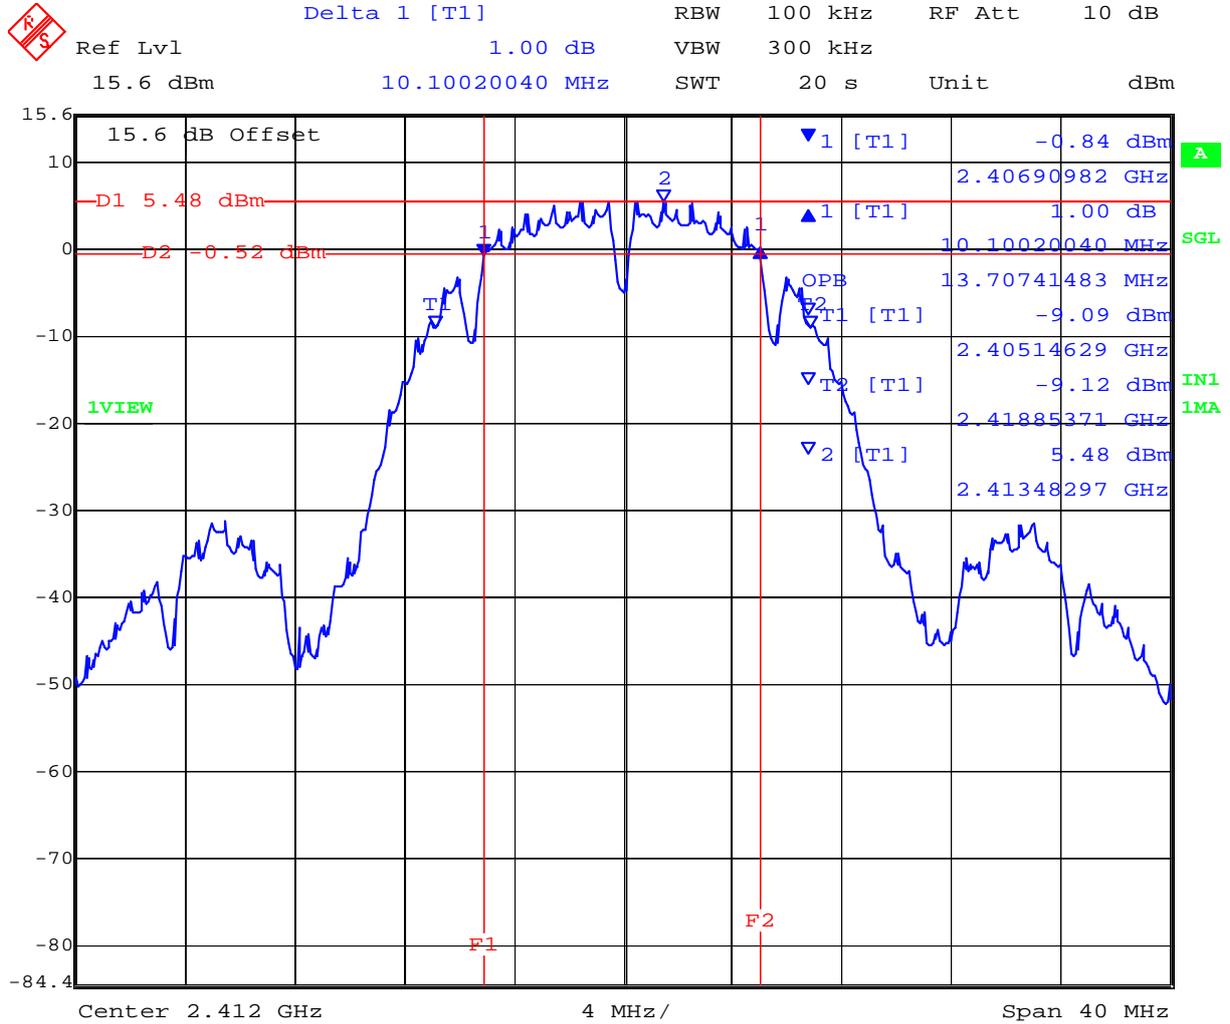


Date: 17.NOV.2011 14:08:15

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

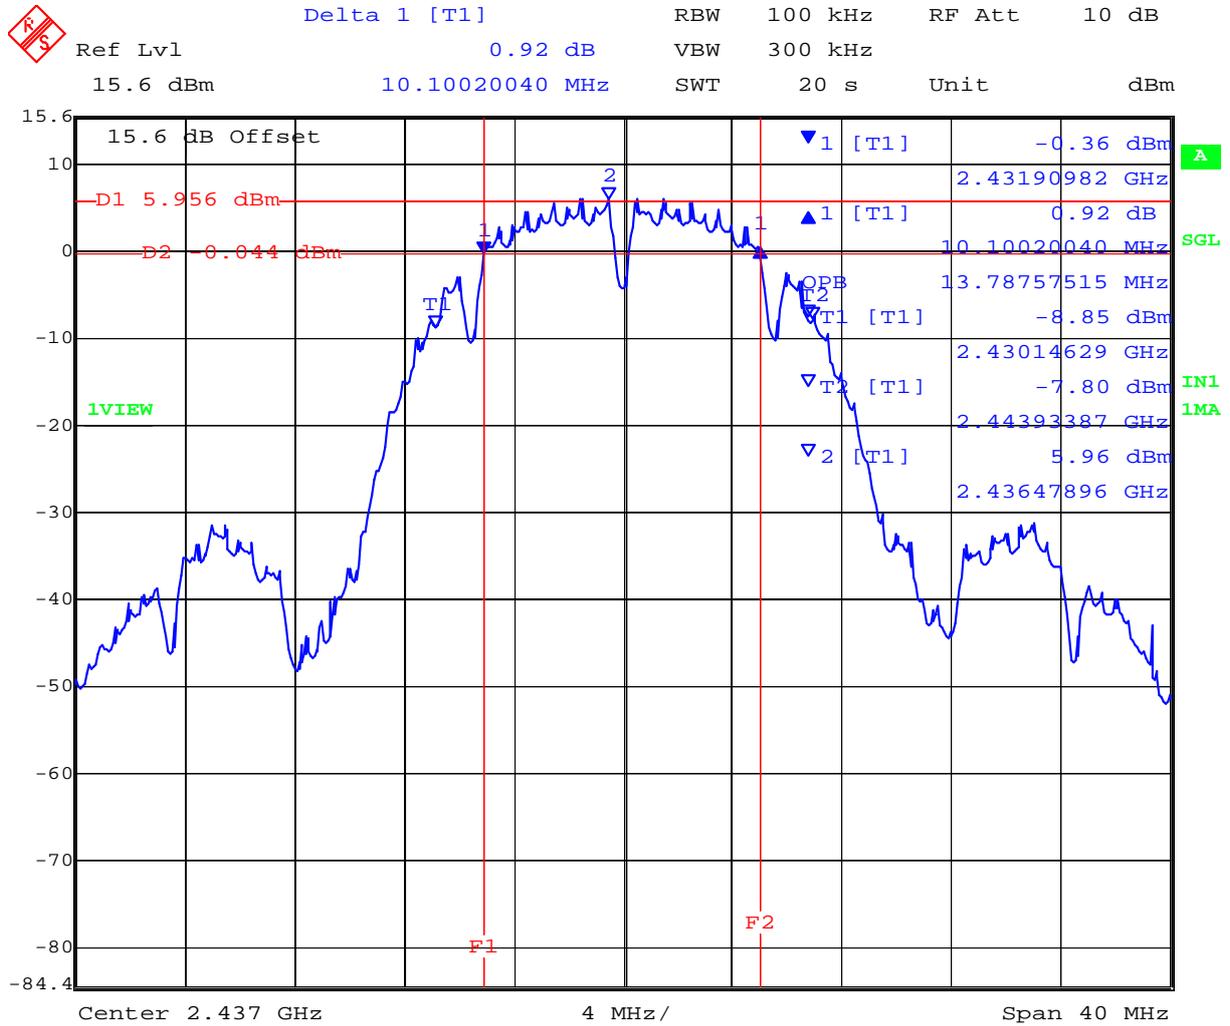

Date: 17.NOV.2011 14:21:58

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

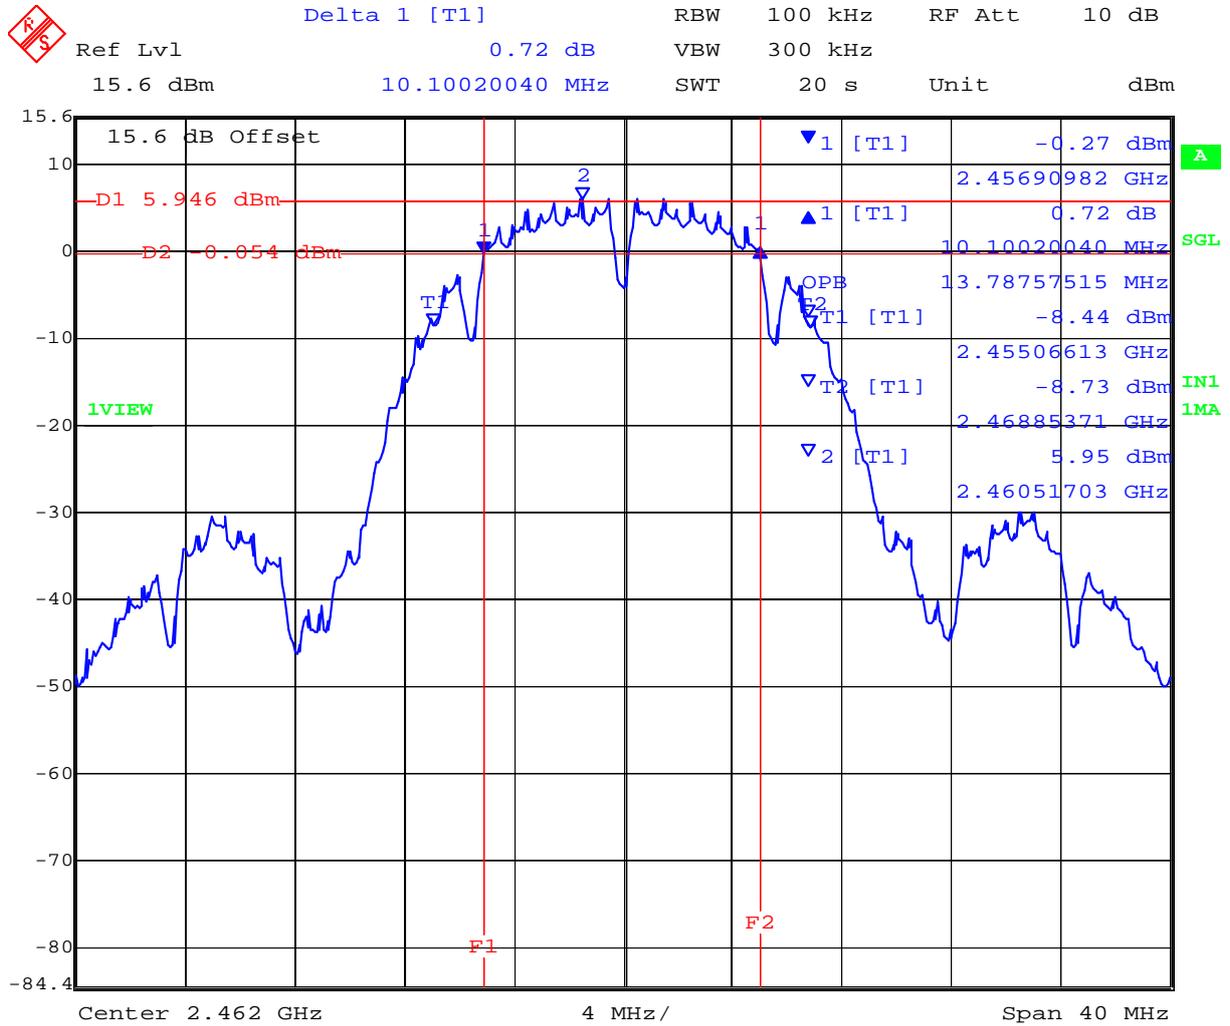

Date: 17.NOV.2011 14:35:18

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 24 of 134

**7.1.2 6 dB and 99% Bandwidth Results: 802.11g**

<b>Test Conditions:</b>	15.247 (a)(2)	<b>Rel. Humidity (%):</b>	35 to 42
<b>Variant:</b>	802.11g	<b>Ambient Temp. (°C):</b>	19 to 22
<b>TPC:</b>	HIGH	<b>Pressure (mBars):</b>	998 to 1003
<b>Modulation:</b>	ON	<b>Duty Cycle (%):</b>	100
<b>Beam Forming Gain (Y):</b>	N/A dB	<b>Antenna Gain:</b>	2.5 dBi
<b>Applied Voltage:</b>	3.30 Vdc		
<b>Notes 1:</b>			
<b>Notes 2:</b>			

**6 dB Bandwidth**


Test Frequency	6 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz				kHz	MHz	MHz
MHz	a	b	c	d			
2412.000	16.673000	--	--	--	500	0.5	-16.173000
2437.000	16.513000	--	--	--			-16.013000
2462.000	16.593000	--	--	--			-16.093000

**99% Bandwidth**

Test Frequency	99 % Bandwidth						
	MHz						
MHz	a	b	c	d			
2412.000	16.513000	--	--	--			
2437.000	16.433000	--	--	--			
2462.000	16.513000	--	--	--			


<b>Measurement uncertainty:</b>	±2.81 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

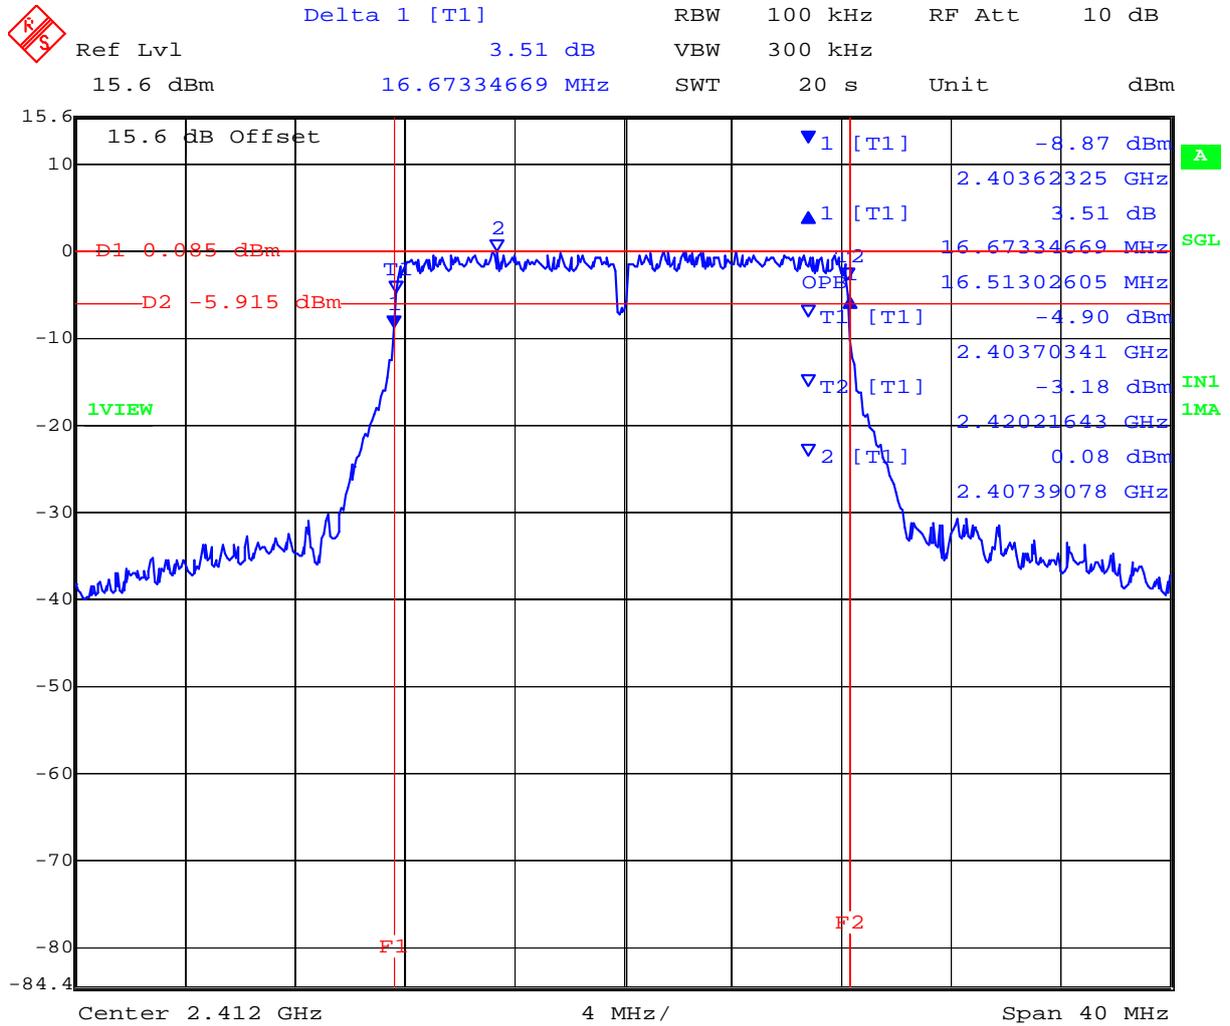


Date: 17.NOV.2011 14:51:54

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

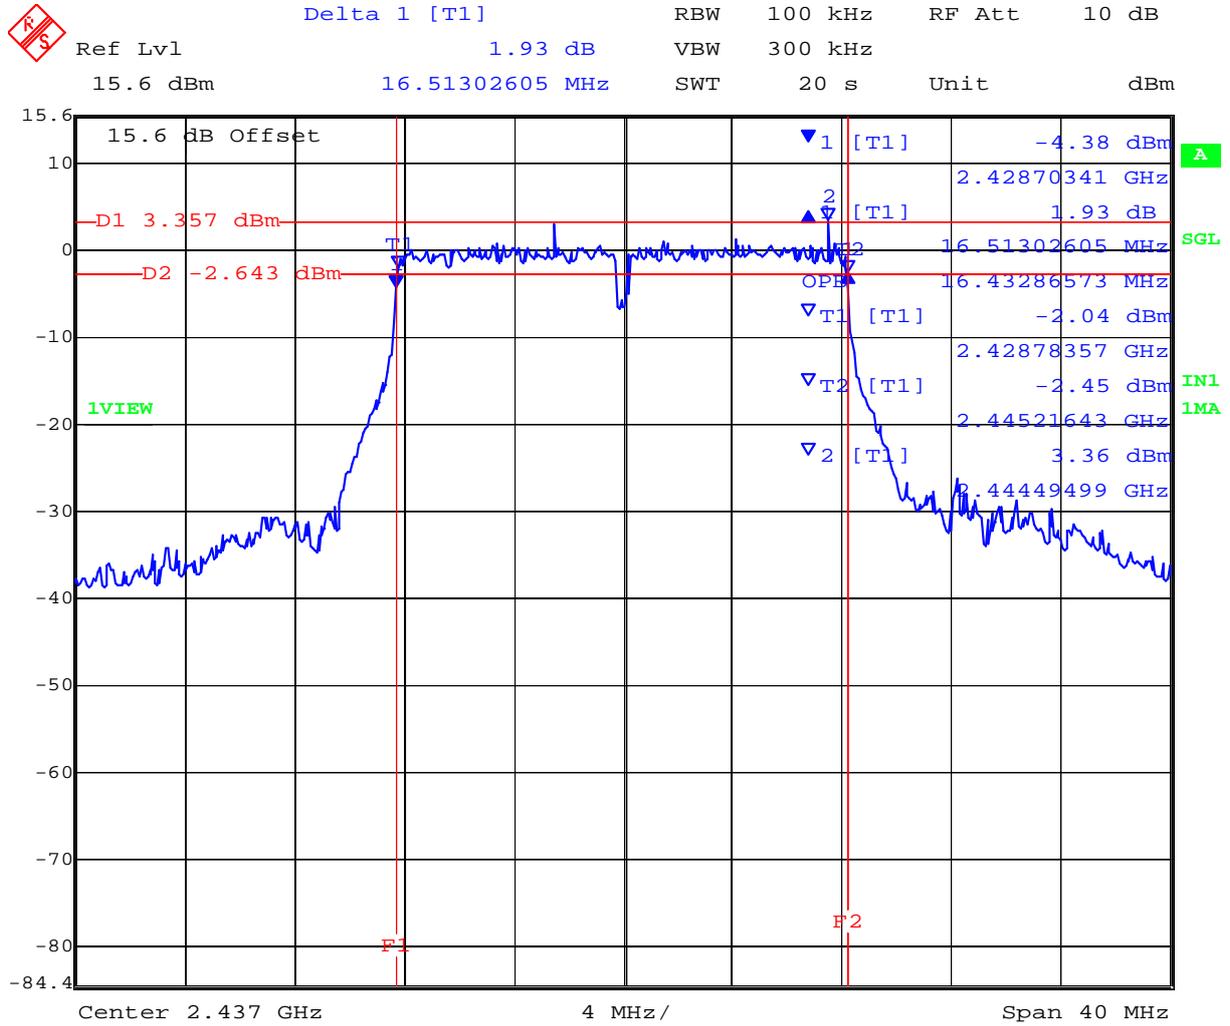

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

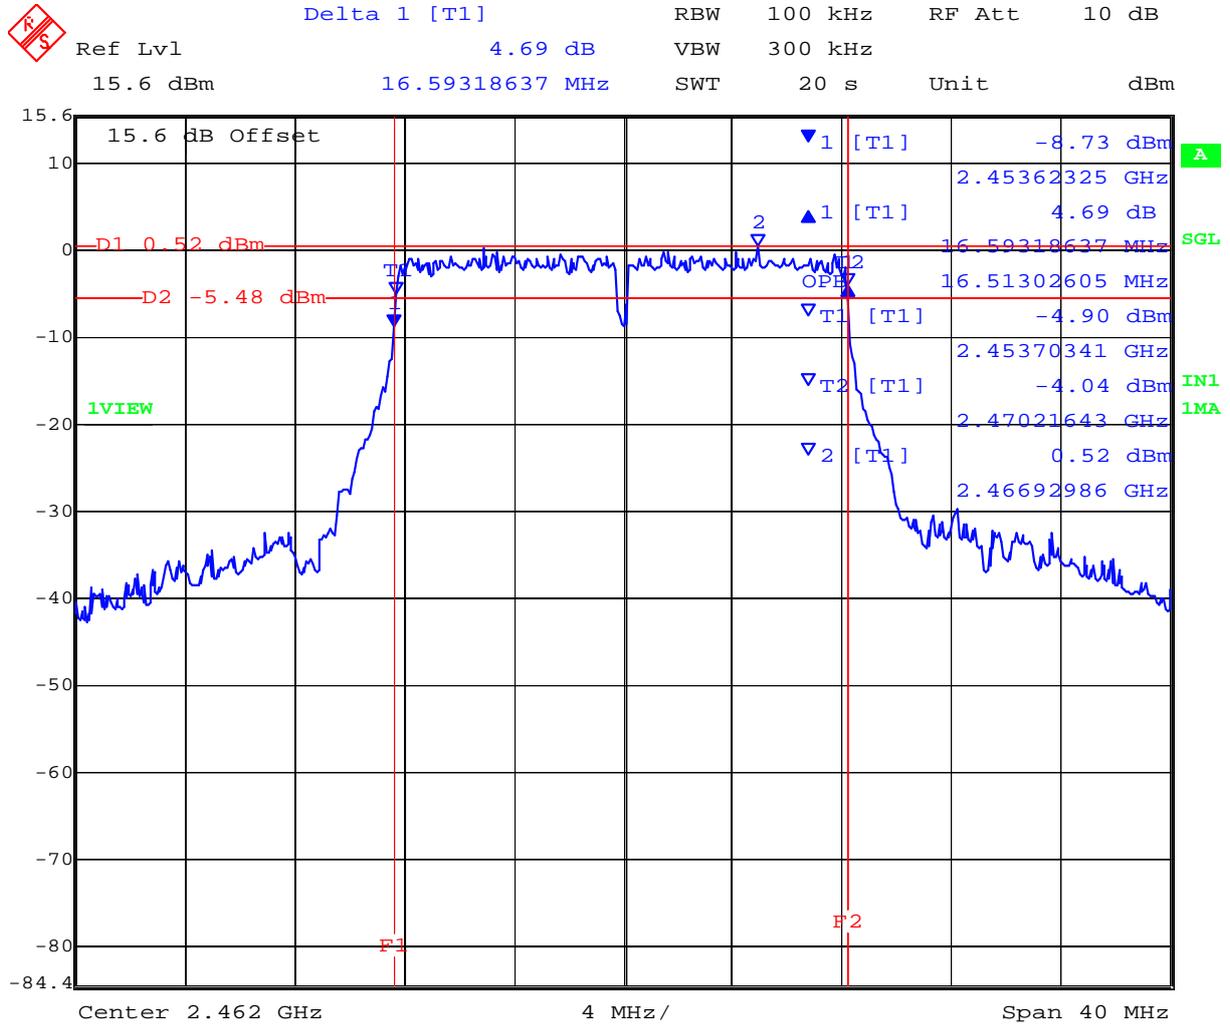

Date: 17.NOV.2011 15:13:28

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**7.1.3 6 dB and 99% Bandwidth Results: 802.11n HT-20**

<b>Test Conditions:</b>	15.247 (a)(2)	<b>Rel. Humidity (%):</b>	35 to 42
<b>Variant:</b>	802.11n HT-20	<b>Ambient Temp. (°C):</b>	19 to 22
<b>TPC:</b>	HIGH	<b>Pressure (mBars):</b>	998 to 1003
<b>Modulation:</b>	ON	<b>Duty Cycle (%):</b>	100
<b>Beam Forming Gain (Y):</b>	N/A dB	<b>Antenna Gain:</b>	2.5 dBi
<b>Applied Voltage:</b>	3.30 Vdc		
<b>Notes 1:</b>			
<b>Notes 2:</b>			

**6 dB Bandwidth**


Test Frequency	6 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz				kHz	MHz	MHz
MHz	a	b	c	d			
2412.000	17.956000	--	--	--	500	0.5	-17.456000
2437.000	17.635000	--	--	--			-17.135000
2462.000	17.635000	--	--	--			-17.135000

**99% Bandwidth**

Test Frequency	99 % Bandwidth					
	MHz					
MHz	a	b	c	d		
2412.000	17.715000	--	--	--		
2437.000	17.715000	--	--	--		
2462.000	17.715000	--	--	--		


<b>Measurement uncertainty:</b>	±2.81 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

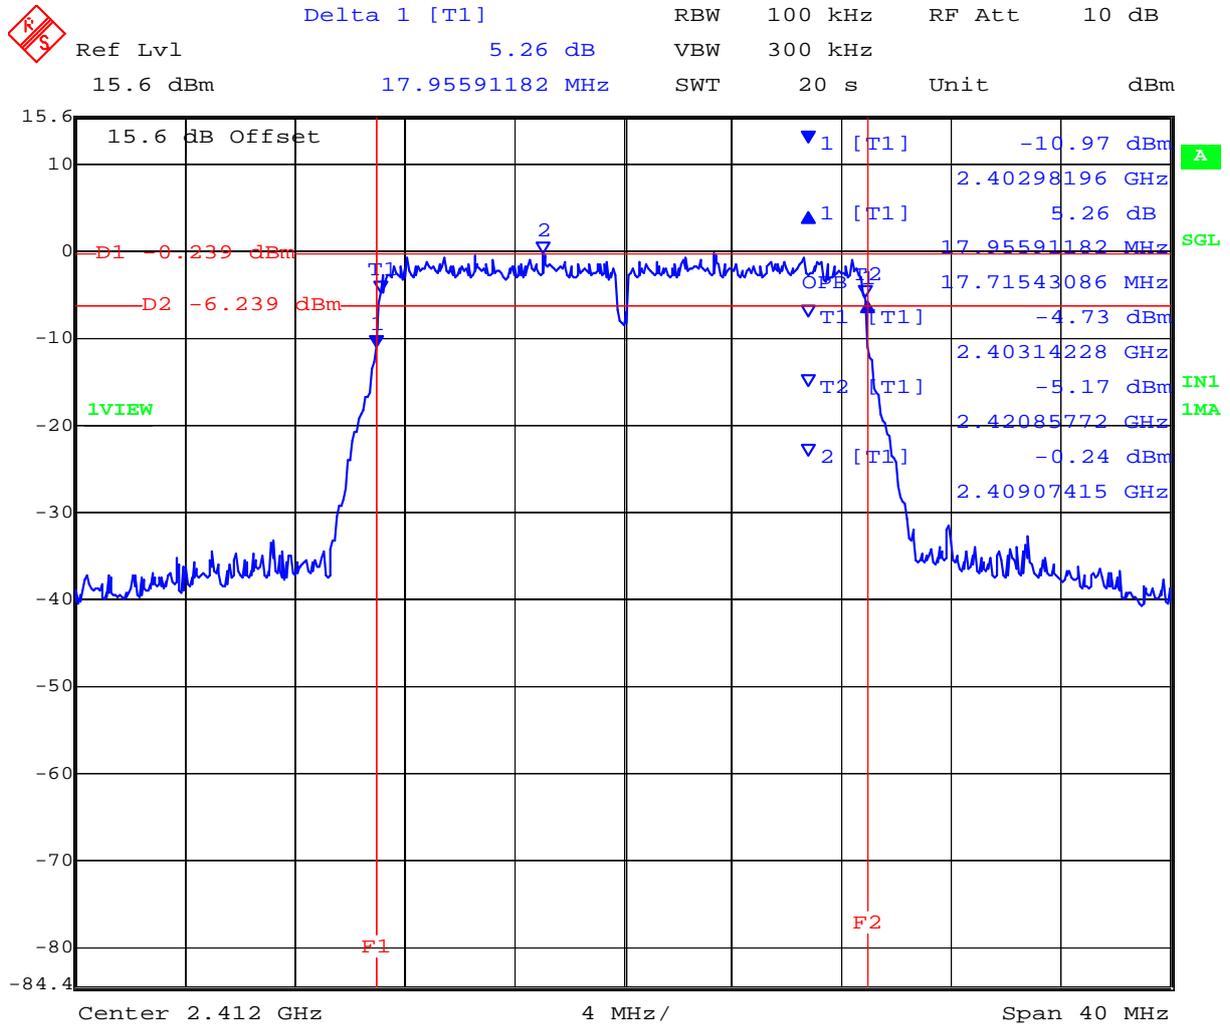


Date: 17.NOV.2011 15:37:21

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

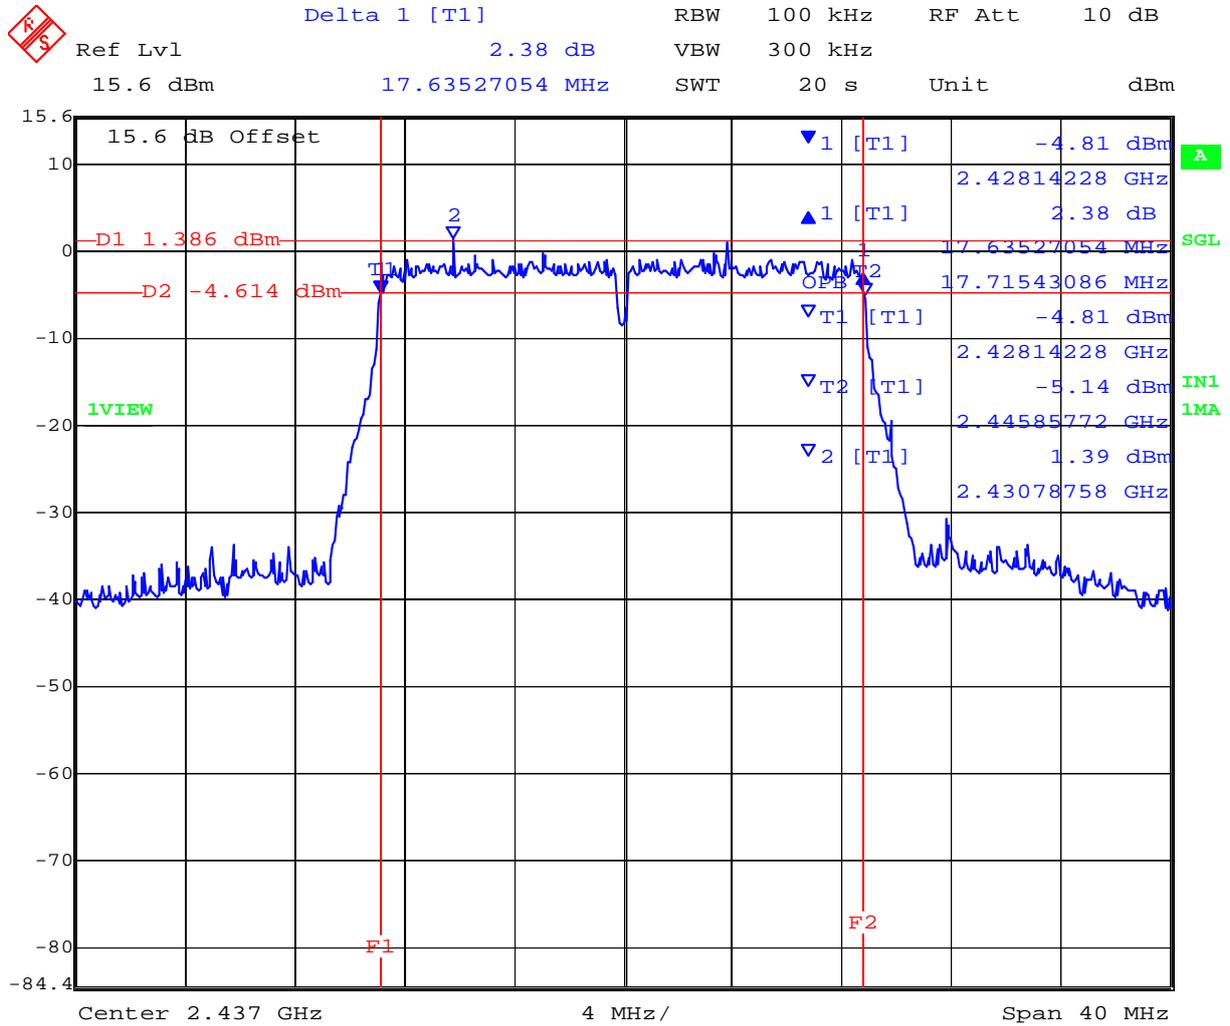

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

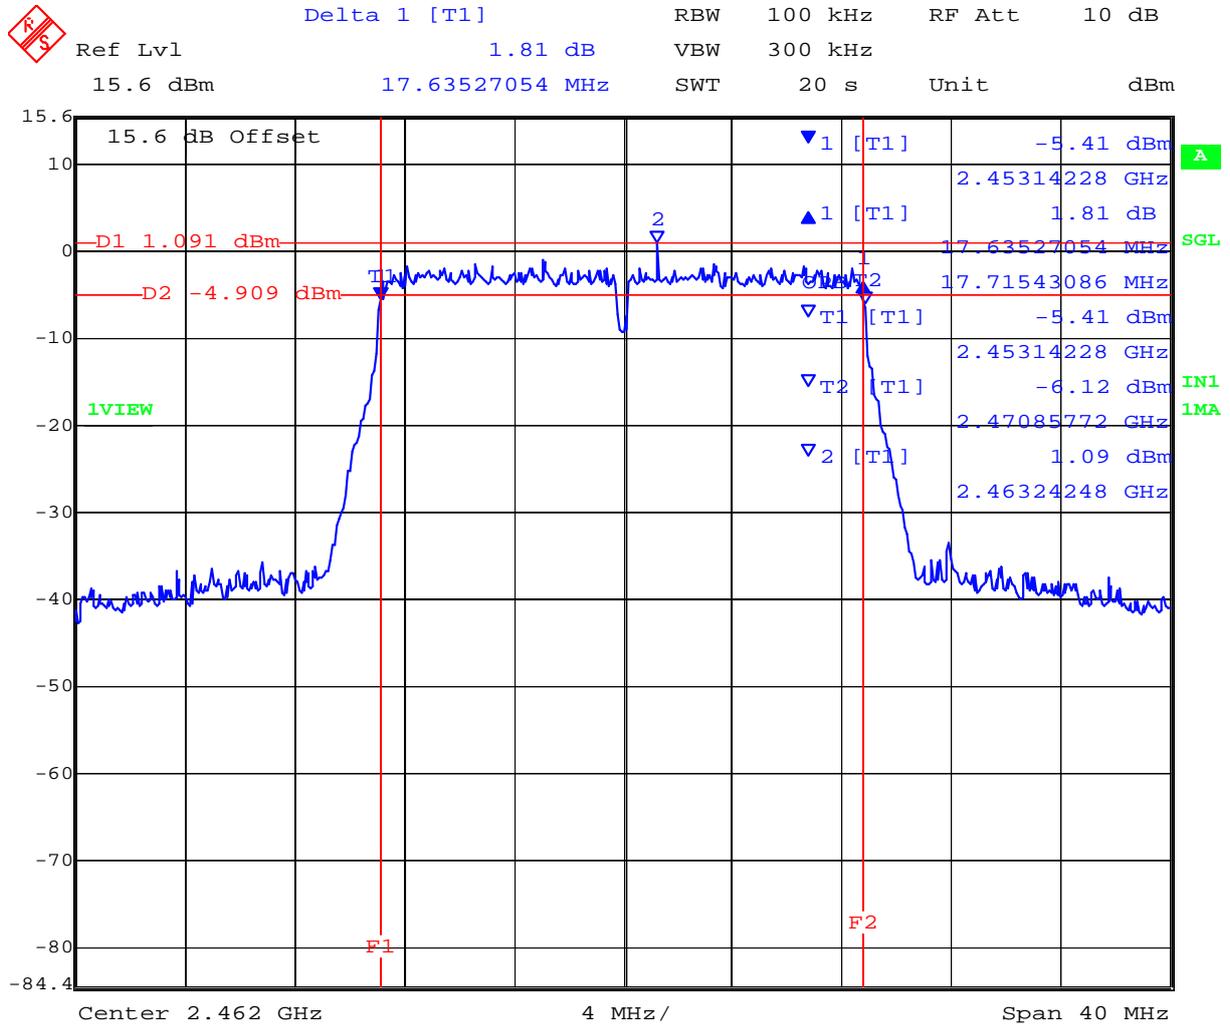

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**7.1.4 6 dB and 99% Bandwidth Results: 802.11n HT-40**

<b>Test Conditions:</b>	15.247 (a)(2)	<b>Rel. Humidity (%):</b>	35 to 42
<b>Variant:</b>	802.11n HT-40	<b>Ambient Temp. (°C):</b>	19 to 22
<b>TPC:</b>	HIGH	<b>Pressure (mBars):</b>	998 to 1003
<b>Modulation:</b>	ON	<b>Duty Cycle (%):</b>	100
<b>Beam Forming Gain (Y):</b>	N/A dB	<b>Antenna Gain:</b>	2.5 dBi
<b>Applied Voltage:</b>	3.30 Vdc		
<b>Notes 1:</b>			
<b>Notes 2:</b>			

**6 dB Bandwidth**


Test Frequency	6 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz				kHz	MHz	
MHz	a	b	c	d			
2422.000	36.553000	--	--	--	500	0.5	-36.053000
2437.000	36.874000	--	--	--			-36.374000
2452.000	36.553000	--	--	--			-36.053000

**99% Bandwidth**

Test Frequency	99 % Bandwidth					
	MHz					
MHz	a	b	c	d		
2422.000	36.393000	--	--	--		
2437.000	36.393000	--	--	--		
2452.000	36.393000	--	--	--		


<b>Measurement uncertainty:</b>	±2.81 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

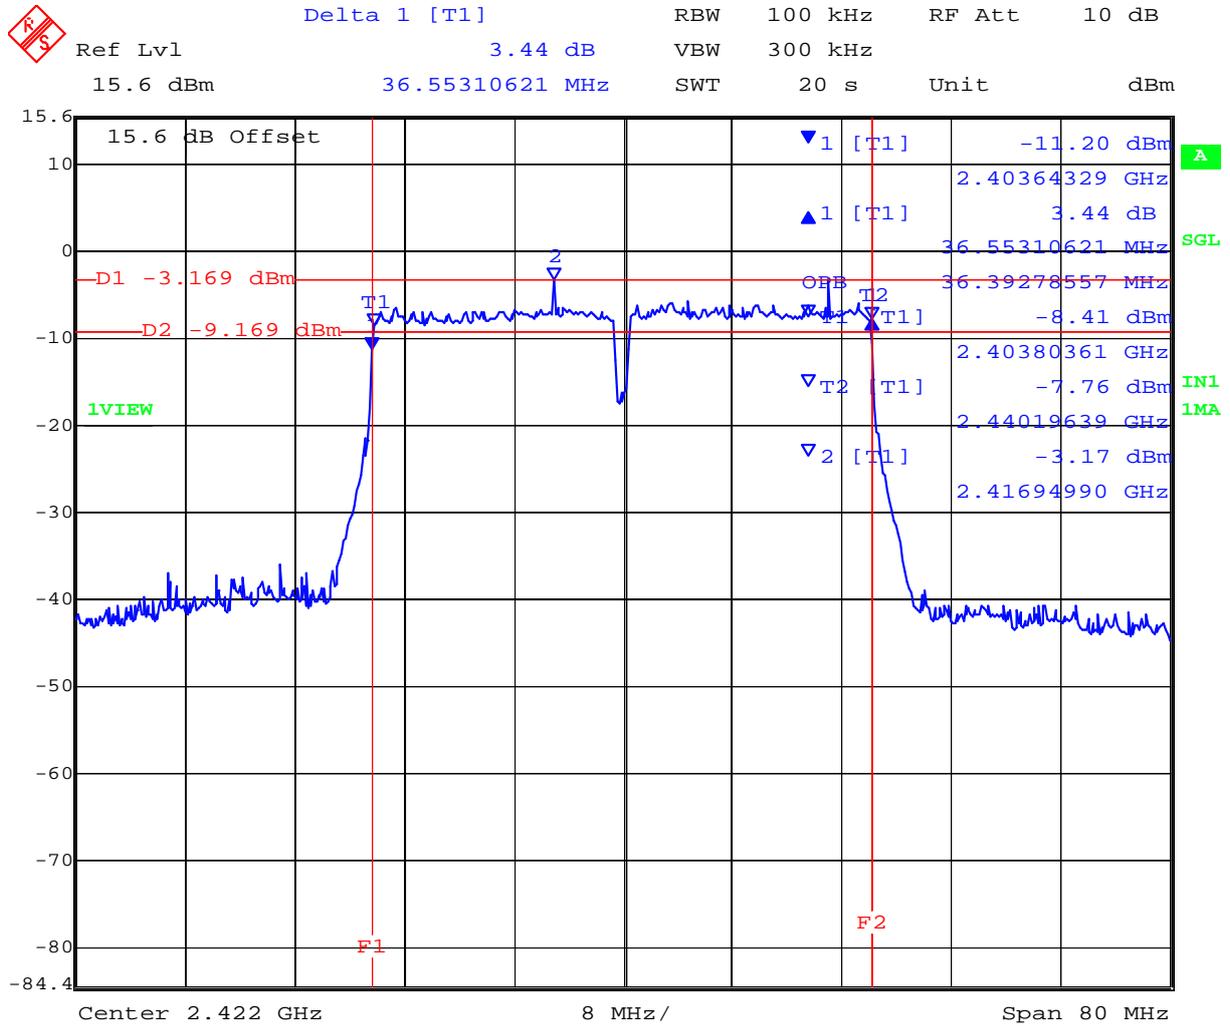


Date: 17.NOV.2011 16:11:37

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

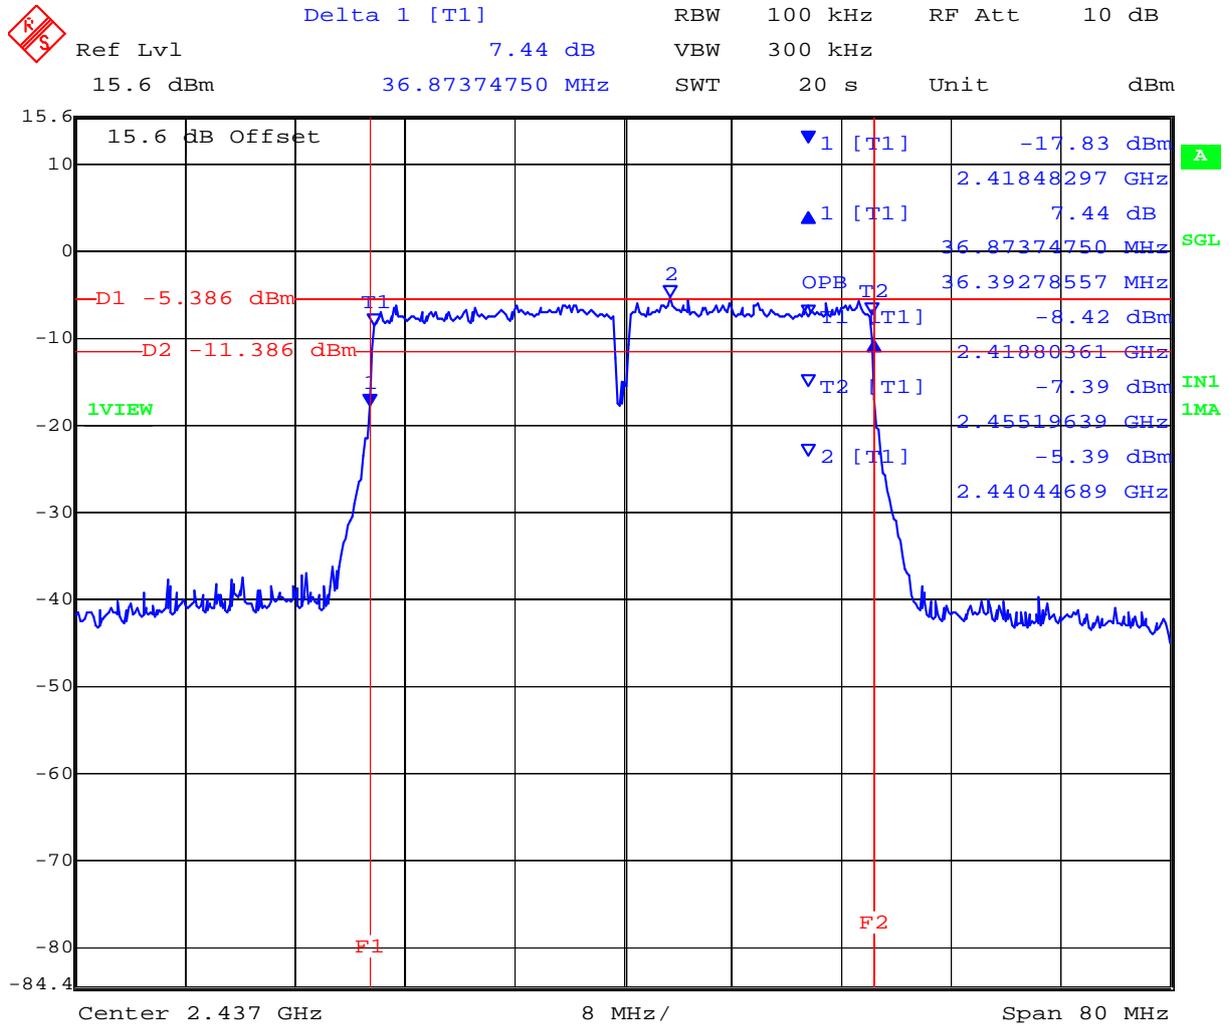

Date: 17.NOV.2011 16:23:09

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

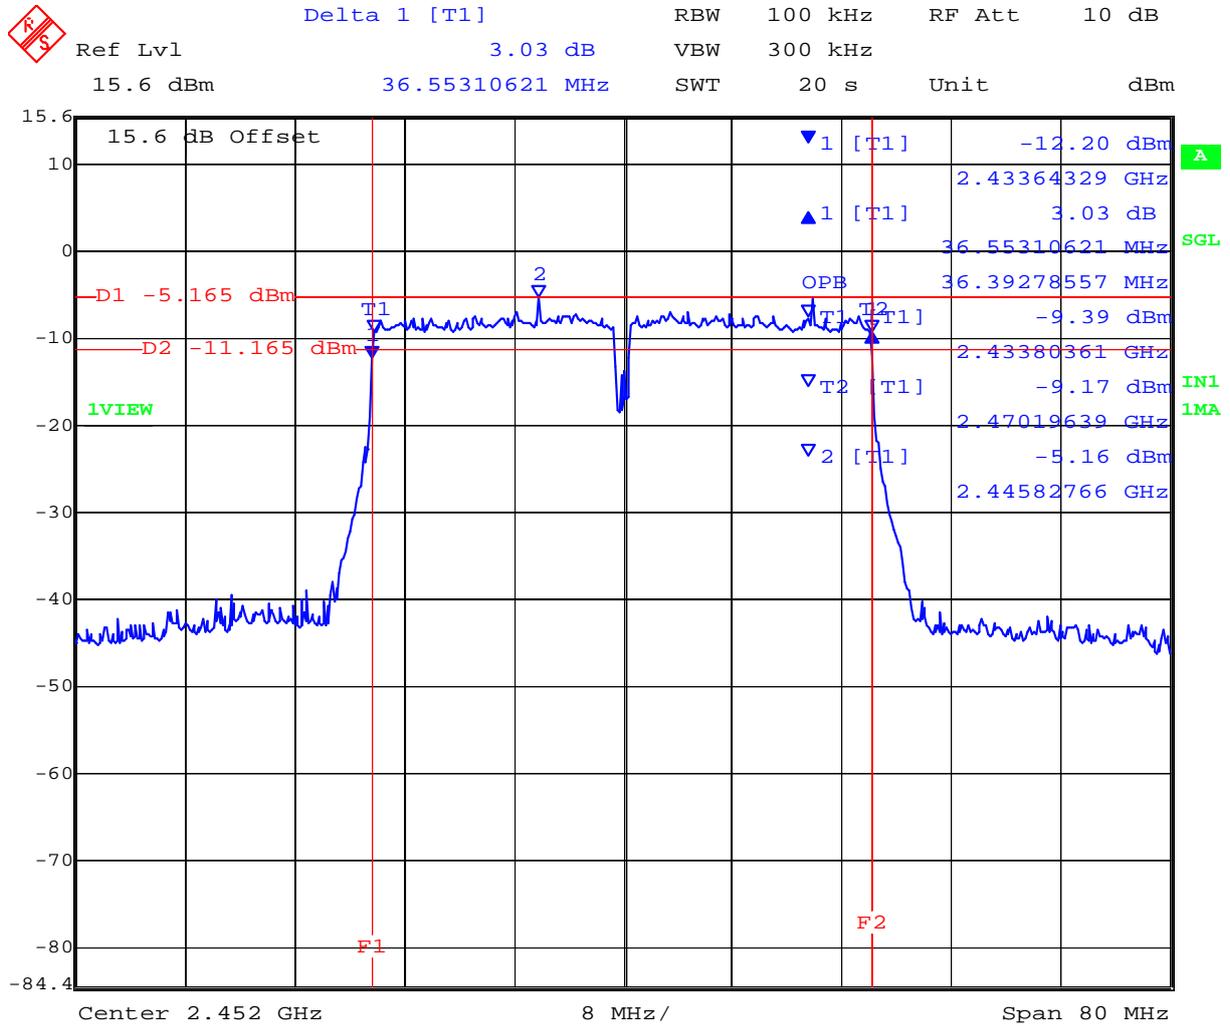

Date: 17.NOV.2011 16:33:43


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## 7.2 Peak Output Power

### Test Procedure

The test methodology and conditions utilized for each measurement is referenced in the test results matrix. The average output power was measured per the test configuration identified below. Per the standard measurements were taken at ambient conditions, nominal voltage.

### Test Configuration

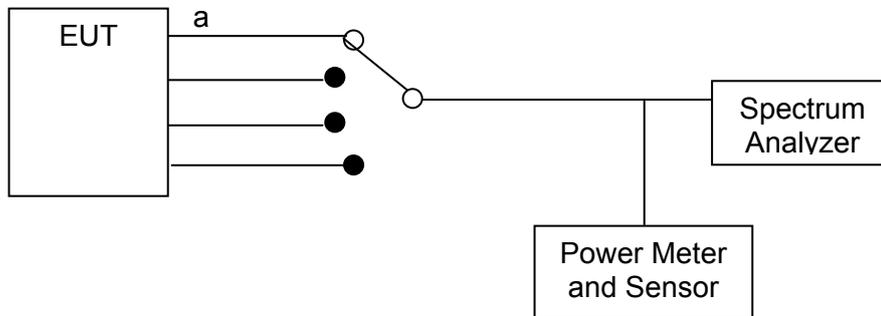

Measurement setup for Peak Output Power



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 37 of 134

---

### Specification for Peak Output Power Limits

**§15.247 (b)** The maximum peak output power of the intentional radiator shall not exceed the following:

**§15.247 (b) (3)** For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands: 1.0 watt.

**15.247 (b) (4)** The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**15.247 (c)** Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(ii) Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

**§15.31 (e)** For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.



### Specification for Peak Output Power Limits (continued)

#### Industry Canada RSS-210 §A8.4 (4)

(4) For systems employing digital modulation techniques operating in the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz, the maximum peak conducted output power shall not exceed 1 W. Except as provided in Section A8.4 (5), the e.i.r.p. shall not exceed 4 W.

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

(5) Point-to-point systems in the bands 2400-2483.5 MHz and 5725-5850 MHz are permitted to have an e.i.r.p. higher than 4 W provided that the higher e.i.r.p. is achieved by employing higher gain directional antennas and not higher transmitter output powers. Point-to-multipoint systems, omnidirectional applications and multiple co-located transmitters transmitting the same information are prohibited from exceeding 4 W e.i.r.p. However, remote stations of point-to-multipoint systems shall be allowed to operate at greater than 4 W e.i.r.p. under the same conditions as for point-to-point systems.

Note: "Fixed point-to-point operation" excludes point-to-multipoint systems, omnidirectional applications and multiple co-located transmitters transmitting the same information.

#### Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-01 'Measuring RF Output Power'	0158, 0252, 0313, 0314, 0223, 0116, 0117, 0287, 0363



**7.2.1 Measurement results for 802.11b**

<b>Test Conditions:</b>	15.247 (b)	<b>Rel. Humidity (%):</b>	35	to	42
<b>Variant:</b>	802.11b	<b>Ambient Temp. (°C):</b>	19	to	22
<b>TPC:</b>	HIGH	<b>Pressure (mBars):</b>	998	to	1003
<b>Modulation:</b>	ON	<b>Duty Cycle (%):</b>	100		
<b>Beam Forming Gain (Y):</b>	N/A	<b>Antenna Gain:</b>	2.5 dBi		
<b>Applied Voltage:</b>	3.30	Vdc			
<b>Notes 1:</b>					
<b>Notes 2:</b>					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)				Combined	Calculated		
MHz	a	b	c	d				
2412	16.90	--	--	--	N/A	16.90	30.00	-13.10
2437	17.68	--	--	--	N/A	17.68	30.00	-12.32
2462	17.48	--	--	--	N/A	17.48	30.00	-12.52

<b>Measurement uncertainty:</b>	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 40 of 134

### 7.2.2 Measurement results for 802.11g

<b>Test Conditions:</b>	15.247 (b)	<b>Rel. Humidity (%):</b>	35	to	42
<b>Variant:</b>	802.11g	<b>Ambient Temp. (°C):</b>	19	to	22
<b>TPC:</b>	HIGH	<b>Pressure (mBars):</b>	998	to	1003
<b>Modulation:</b>	ON	<b>Duty Cycle (%):</b>	100		
<b>Beam Forming Gain (Y):</b>	N/A	<b>Antenna Gain:</b>	2.5 dBi		
<b>Applied Voltage:</b>	3.30	Vdc			
<b>Notes 1:</b>					
<b>Notes 2:</b>					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)				Combined	Calculated		
MHz	a	b	c	d			dBm	dB
2412	14.97	--	--	--	N/A	14.97	30.00	-15.03
2437	15.50	--	--	--	N/A	15.50	30.00	-14.50
2462	14.51	--	--	--	N/A	14.51	30.00	-15.49

<b>Measurement uncertainty:</b>	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 41 of 134

### 7.2.3 Measurement results for 802.11n HT-20

<b>Test Conditions:</b>	15.247 (b)	<b>Rel. Humidity (%):</b>	35	to	42
<b>Variant:</b>	802.11n HT-20	<b>Ambient Temp. (°C):</b>	19	to	22
<b>TPC:</b>	HIGH	<b>Pressure (mBars):</b>	998	to	1003
<b>Modulation:</b>	ON	<b>Duty Cycle (%):</b>	100		
<b>Beam Forming Gain (Y):</b>	N/A dB	<b>Antenna Gain:</b>	2.5 dBi		
<b>Applied Voltage:</b>	3.30 Vdc				
<b>Notes 1:</b>					
<b>Notes 2:</b>					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)				Combined	Calculated		
MHz	a	b	c	d				
2412	14.06	--	--	--	N/A	14.06	30.00	-15.94
2437	14.49	--	--	--	N/A	14.49	30.00	-15.51
2462	13.16	--	--	--	N/A	13.16	30.00	-16.84

<b>Measurement uncertainty:</b>	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 42 of 134

**7.2.4 Measurement results for 802.11n HT-40**

<b>Test Conditions:</b>	15.247 (b)	<b>Rel. Humidity (%):</b>	35	to	42
<b>Variant:</b>	802.11n HT-40	<b>Ambient Temp. (°C):</b>	19	to	22
<b>TPC:</b>	HIGH	<b>Pressure (mBars):</b>	998	to	1003
<b>Modulation:</b>	ON	<b>Duty Cycle (%):</b>	100		
<b>Beam Forming Gain (Y):</b>	N/A dB	<b>Antenna Gain:</b>	2.5 dBi		
<b>Applied Voltage:</b>	3.30 Vdc				
<b>Notes 1:</b>					
<b>Notes 2:</b>					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)				Combined	Calculated		
MHz	a	b	c	d				
2422	11.97	--	--	--	N/A	11.97	30.00	-18.03
2437	12.33	--	--	--	N/A	12.33	30.00	-17.67
2452	10.6	--	--	--	N/A	10.60	30.00	-19.40

<b>Measurement uncertainty:</b>	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 7.3 Maximum Permissible Exposure

#### Calculations for Maximum Permissible Exposure Levels

$$\text{Power Density} = P_d \text{ (mW/cm}^2\text{)} = \text{EIRP}/(4\pi d^2)$$

$$\text{EIRP} = P * G$$

P = Peak output power (mW)

G = Antenna numeric gain (numeric)

d = Separation distance (cm)

$$\text{Numeric Gain} = 10^{(G \text{ (dBi)}/10)}$$

The Peak Power in mW is the highest transmitter power measured and summed across all transmitters. Because the EUT belongs to the General Population/Uncontrolled Exposure the limit of power density is 1.0 mW/cm<sup>2</sup>

Freq. Band (MHz)	Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	EIRP (mW)	Distance @ 1mW/cm <sup>2</sup> Limit(cm)	Minimum Separation Distance (cm)
2.4 - 4.835	2.5	1.8	+17.68	58.6	2.9	20

Note: for mobile or fixed location transmitters the minimum separation distance is 20cm, even if calculations indicate the MPE distance to be less.

#### Specification

##### Maximum Permissible Exposure Limits

###### FCC §1.1310

Limit = 1mW / cm<sup>2</sup> from 1.310 Table 1

###### RSS-Gen §5.6

Exposure of Humans to RF Fields: Category I and Category II equipment shall comply with the applicable requirements of RSS-102.

##### Laboratory Measurement Uncertainty for Power Measurements

Measurement uncertainty	±1.33 dB
-------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## 7.4 Peak Power Spectral Density


### Test Procedure

The test methodology and conditions utilized for each measurement is referenced in the following test results matrix. RF output power, transmit power control and power density were measured per the Test Configuration identified below.

Testing was performed on the highest and lowest power settings of the equipment.

Per the standard measurements were taken at ambient and extreme temperature conditions at nominal and extreme voltage levels.

### Test Configuration

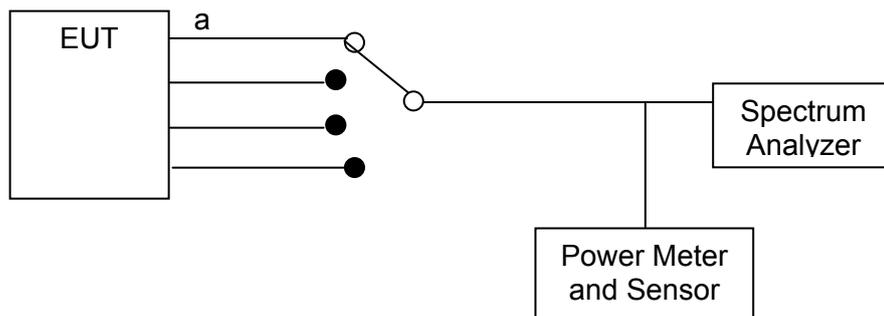

Measurement setup for Peak Power Spectral Density



### Specification for Peak Power Spectral Density Limits

#### FCC §15.247 (e)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission

#### Industry Canada RSS-210 §A8.2 (b)

These include systems that employ digital modulation techniques resulting in spectral characteristics similar to direct sequence systems. The following applies to all three bands:

(a) The minimum -6 dB bandwidth shall be at least 500 kHz.

(b) The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of Section A8.4 (4), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

#### Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-01 'Measuring RF Output Power'	0158, 0252, 0313, 0314, 0223, 0116, 0117, 0287, 0363




**7.4.1 Measurement results for 802.11b**

<b>Test Conditions:</b>	15.247 (e)	<b>Rel. Humidity (%):</b>	35	to	42
<b>Variant:</b>	802.11b	<b>Ambient Temp. (°C):</b>	19	to	22
<b>TPC:</b>	HIGH	<b>Pressure (mBars):</b>	998	to	1003
<b>Modulation:</b>	ON	<b>Duty Cycle (%):</b>	100		
<b>Beam Forming Gain (Y):</b>	N/A dB	<b>Antenna Gain:</b>	2.5 dBi		
<b>Applied Voltage:</b>	3.30 Vdc	<b>Antenna Ports (N):</b>	1		
<b>Notes 1:</b>					
<b>Notes 2:</b>					

Test Frequency	Measured Power Density				Correction factor	Peak Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
2412.000	-10.02	--	--	--	0.00	-10.02	8.00	-18.02
2437.000	-9.76	--	--	--	0.00	-9.76	8.00	-17.76
2462.000	-9.89	--	--	--	0.00	-9.89	8.00	-17.89

<b>Measurement uncertainty:</b>	± 1.33 dB
---------------------------------	-----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

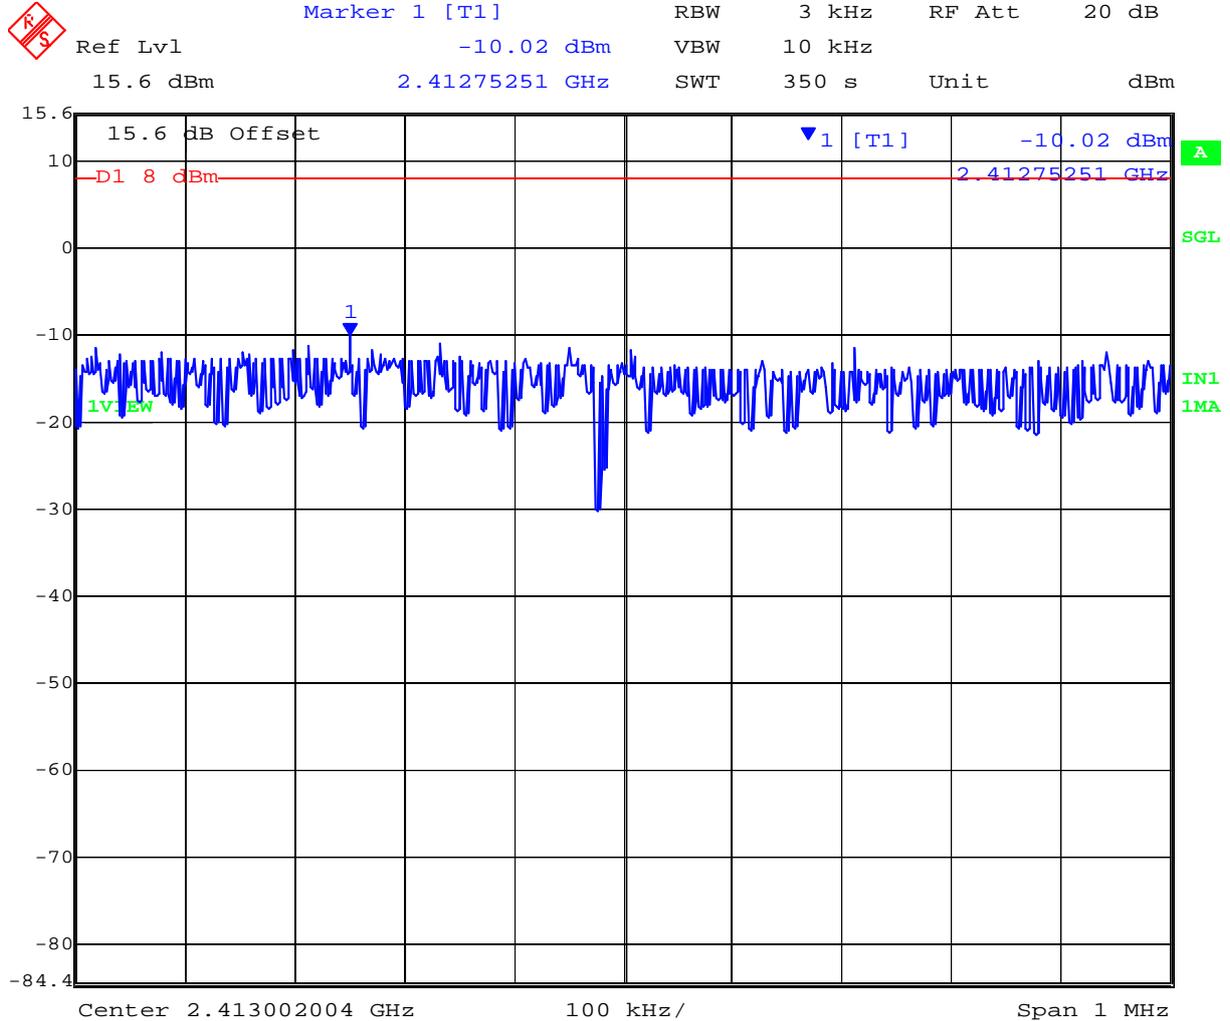


Date: 17.NOV.2011 14:16:07

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Hewlett-Packard SDG0B-1292  
To: FCC 47 CFR Part 15.247 & RSS-210  
Serial #: MARS05-U1 Rev A  
Issue Date: 16<sup>th</sup> July 2012  
Page: Page 48 of 134

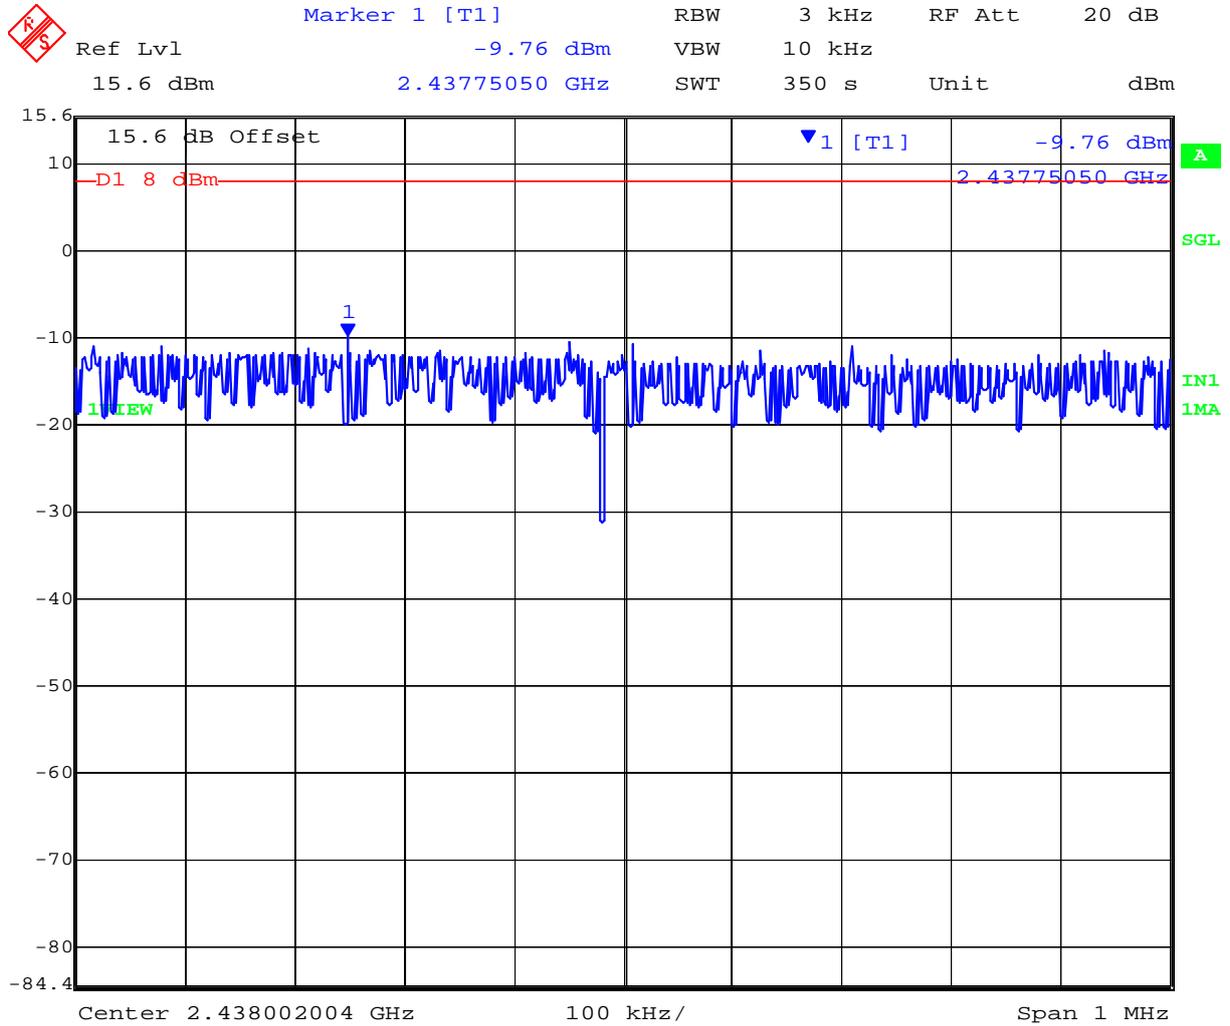


Date: 17.NOV.2011 14:28:32

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Hewlett-Packard SDG0B-1292  
To: FCC 47 CFR Part 15.247 & RSS-210  
Serial #: MARS05-U1 Rev A  
Issue Date: 16<sup>th</sup> July 2012  
Page: Page 49 of 134

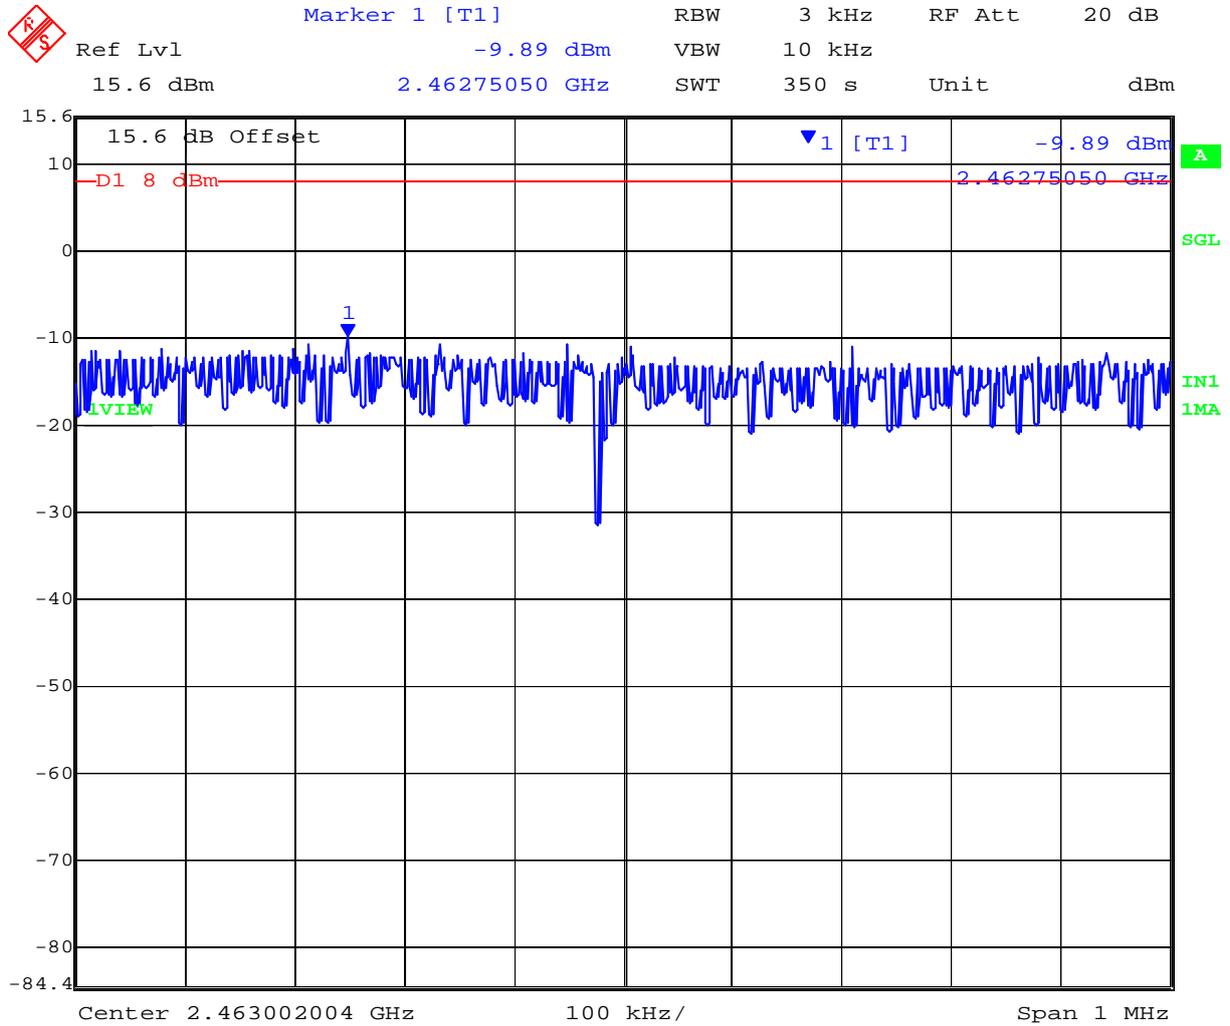

Date: 17.NOV.2011 14:43:15

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 50 of 134

#### 7.4.2 Measurement results for 802.11g

<b>Test Conditions:</b>	15.247 (e)	<b>Rel. Humidity (%):</b>	35	to	42
<b>Variant:</b>	802.11g	<b>Ambient Temp. (°C):</b>	19	to	22
<b>TPC:</b>	HIGH	<b>Pressure (mBars):</b>	998	to	1003
<b>Modulation:</b>	ON	<b>Duty Cycle (%):</b>	100		
<b>Beam Forming Gain (Y):</b>	N/A dB	<b>Antenna Gain:</b>	2.5 dBi		
<b>Applied Voltage:</b>	3.30 Vdc	<b>Antenna Ports (N):</b>	1		
<b>Notes 1:</b>					
<b>Notes 2:</b>					

Test Frequency	Measured Power Density				Correction factor	Peak Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
2412.000	-13.54	--	--	--	0.00	-13.54	8.00	-21.54
2437.000	-12.96	--	--	--	0.00	-12.96	8.00	-20.96
2462.000	-14.55	--	--	--	0.00	-14.55	8.00	-22.55

<b>Measurement uncertainty:</b>	± 1.33 dB
---------------------------------	-----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Date: 17.NOV.2011 14:59:47

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Hewlett-Packard SDG0B-1292  
To: FCC 47 CFR Part 15.247 & RSS-210  
Serial #: MARS05-U1 Rev A  
Issue Date: 16<sup>th</sup> July 2012  
Page: Page 52 of 134

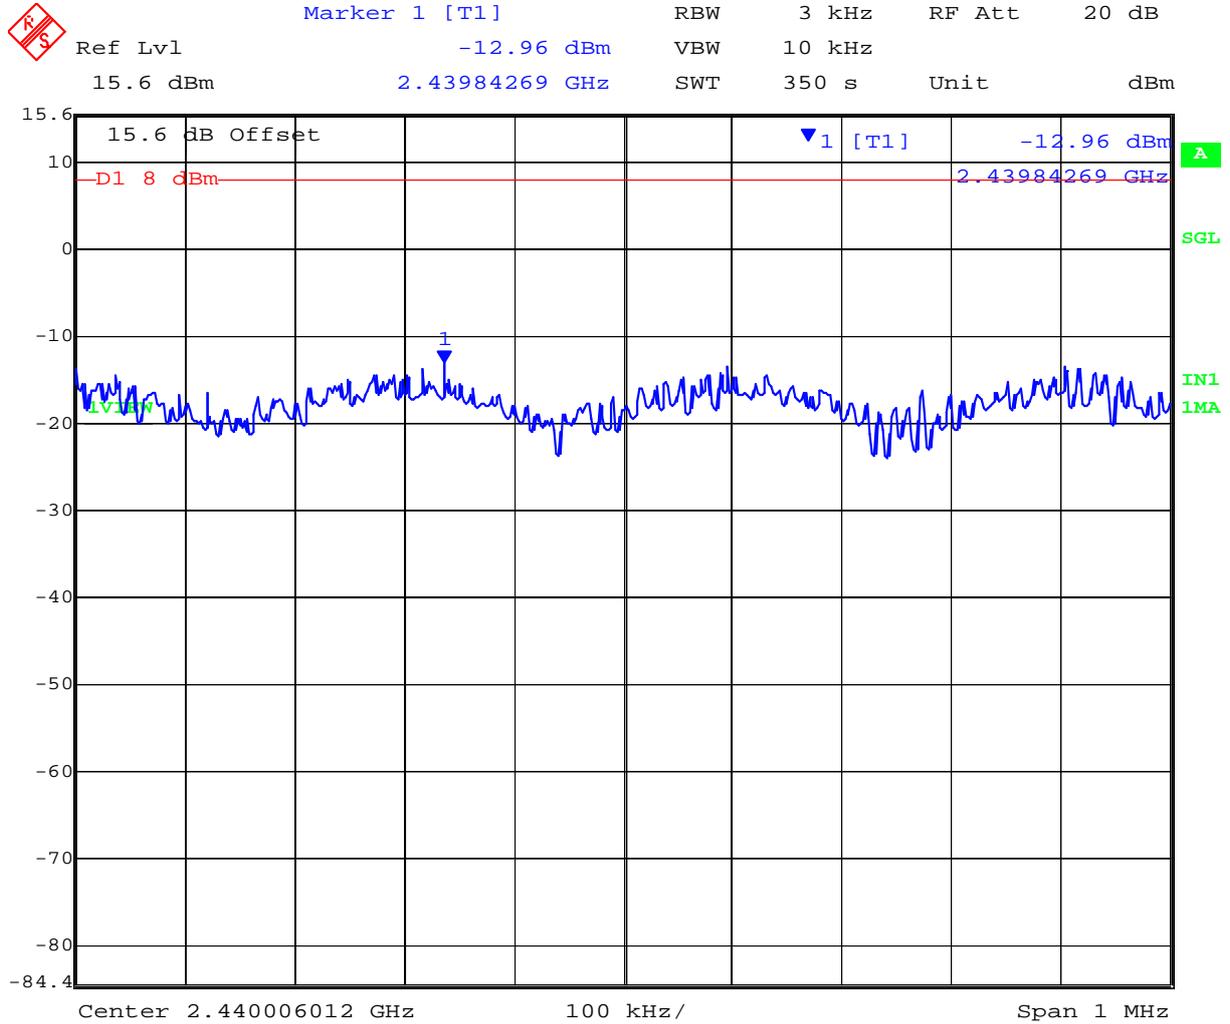


Date: 17.NOV.2011 15:09:54

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Hewlett-Packard SDG0B-1292  
To: FCC 47 CFR Part 15.247 & RSS-210  
Serial #: MARS05-U1 Rev A  
Issue Date: 16<sup>th</sup> July 2012  
Page: Page 53 of 134

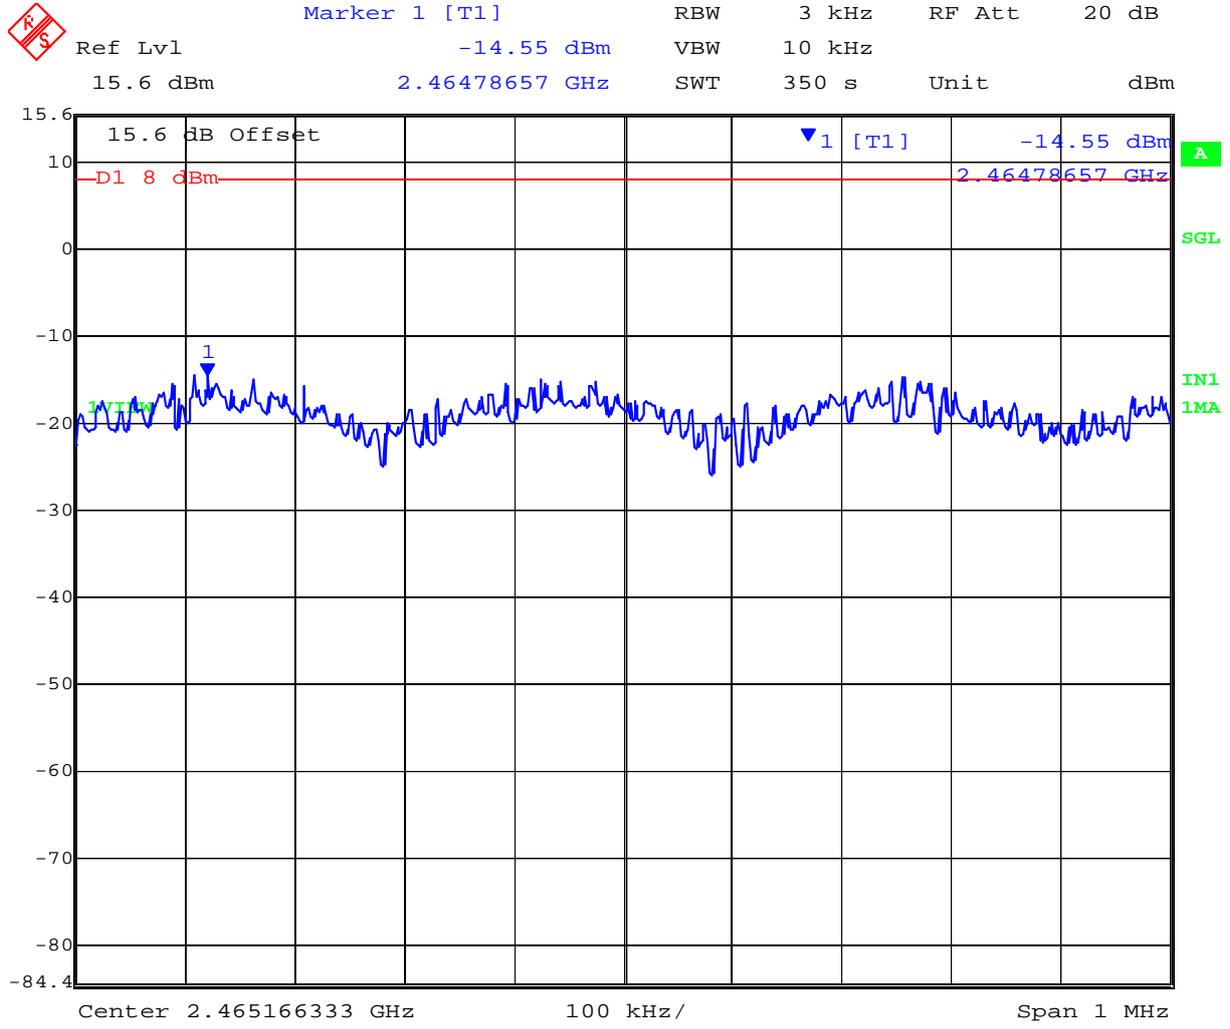

Date: 17.NOV.2011 15:21:25

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




### 7.4.3 Measurement results for 802.11n HT-20

<b>Test Conditions:</b>	15.247 (e)	<b>Rel. Humidity (%):</b>	35	to	42
<b>Variant:</b>	802.11n HT-20	<b>Ambient Temp. (°C):</b>	19	to	22
<b>TPC:</b>	HIGH	<b>Pressure (mBars):</b>	998	to	1003
<b>Modulation:</b>	ON	<b>Duty Cycle (%):</b>	100		
<b>Beam Forming Gain (Y):</b>	N/A dB	<b>Antenna Gain:</b>	2.5 dBi		
<b>Applied Voltage:</b>	3.30 Vdc	<b>Antenna Ports (N):</b>	1		
<b>Notes 1:</b>					
<b>Notes 2:</b>					

Test Frequency	Measured Power Density				Correction factor	Peak Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
2412.000	-14.74	--	--	--	0.00	-14.74	8.00	-22.74
2437.000	-13.67	--	--	--	0.00	-13.67	8.00	-21.67
2462.000	-15.73	--	--	--	0.00	-15.73	8.00	-23.73


<b>Measurement uncertainty:</b>	± 1.33 dB
---------------------------------	-----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

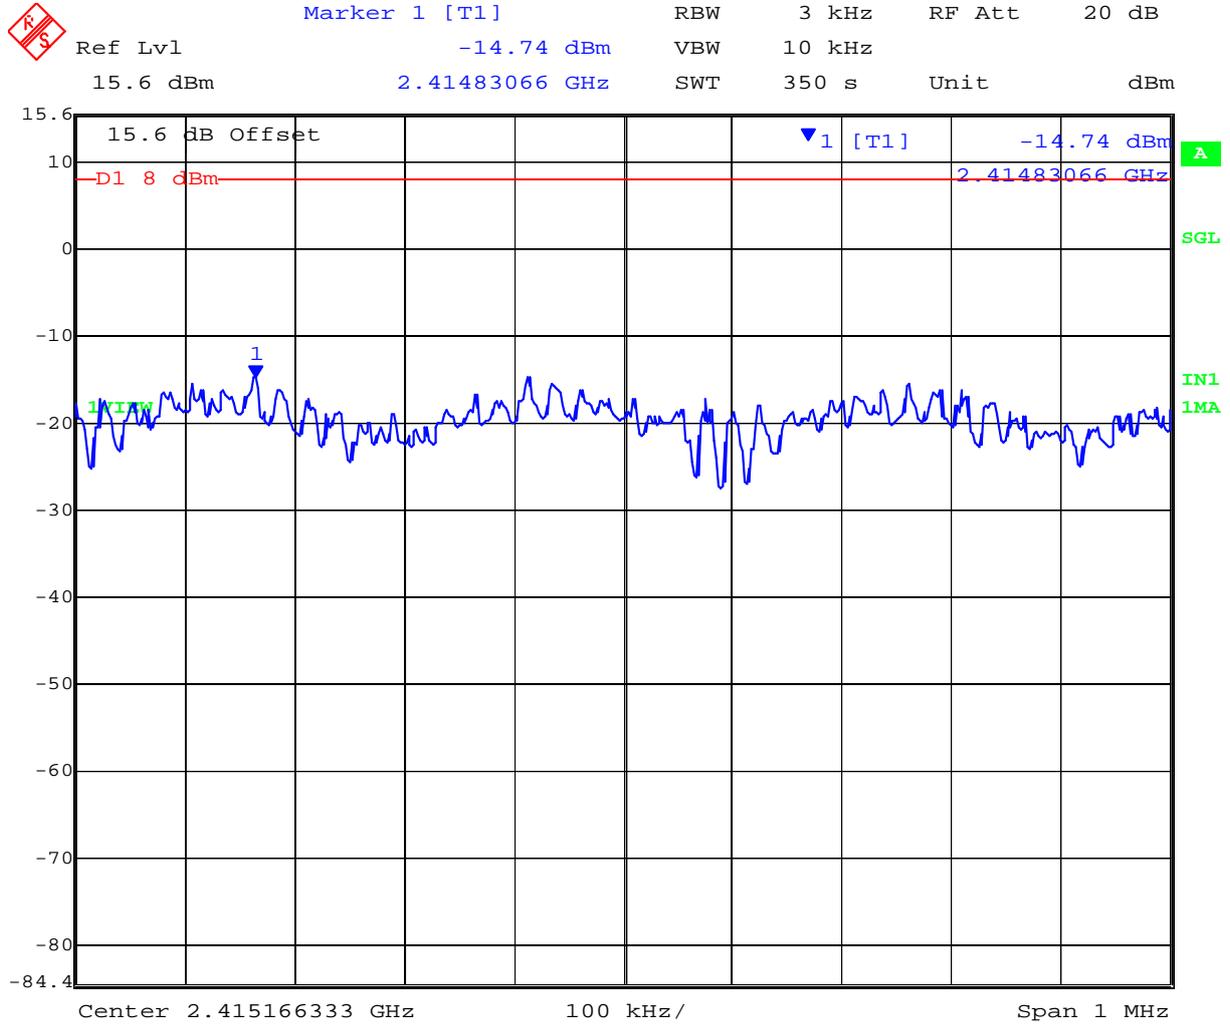


Date: 17.NOV.2011 15:45:15

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

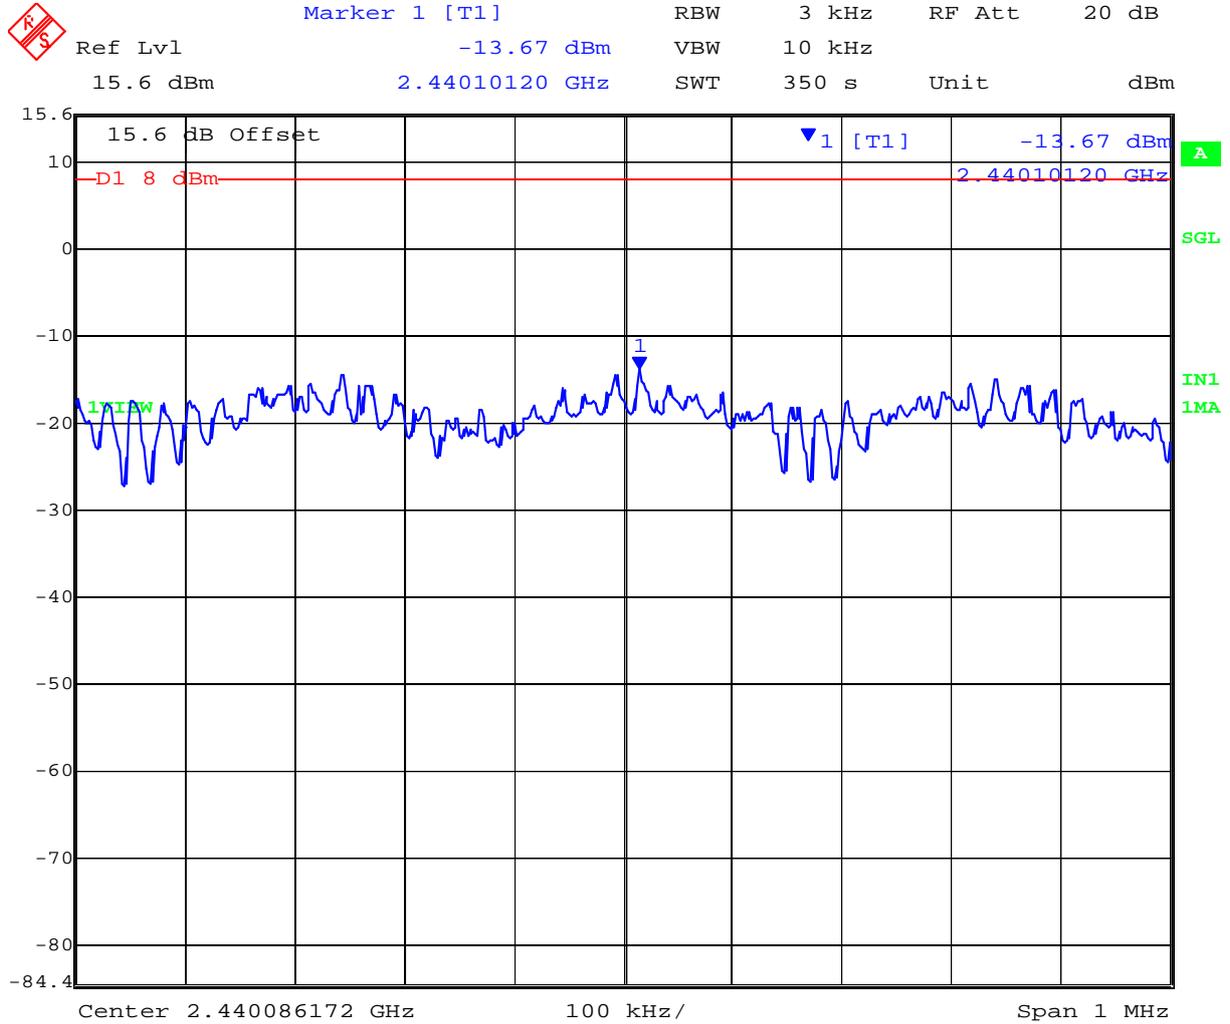

Date: 17.NOV.2011 15:55:20

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

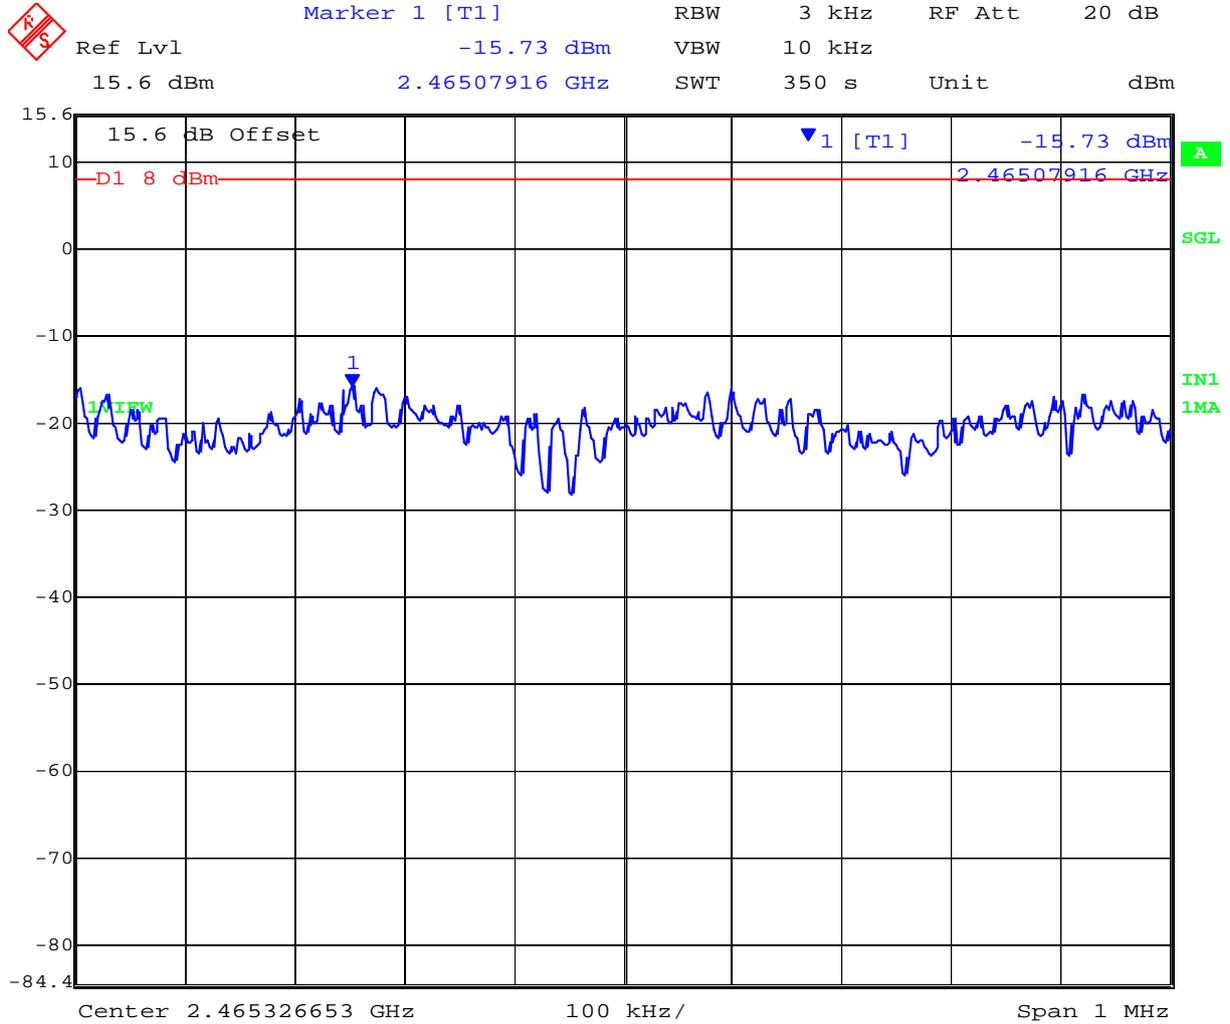

Date: 17.NOV.2011 16:07:10

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**7.4.4 Measurement results for 802.11n HT-40**

<b>Test Conditions:</b>	15.247 (e)	<b>Rel. Humidity (%):</b>	35	to	42
<b>Variant:</b>	802.11n HT-40	<b>Ambient Temp. (°C):</b>	19	to	22
<b>TPC:</b>	HIGH	<b>Pressure (mBars):</b>	998	to	1003
<b>Modulation:</b>	ON	<b>Duty Cycle (%):</b>	100		
<b>Beam Forming Gain (Y):</b>	N/A dB	<b>Antenna Gain:</b>	2.5 dBi		
<b>Applied Voltage:</b>	3.30 Vdc	<b>Antenna Ports (N):</b>	1		
<b>Notes 1:</b>					
<b>Notes 2:</b>					

Test Frequency	Measured Power Density				Correction factor	Peak Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
2422.000	-16.82	--	--	--	0.00	-16.82	8.00	-24.82
2437.000	-19.41	--	--	--	0.00	-19.41	8.00	-27.41
2452.000	-18.64	--	--	--	0.00	-18.64	8.00	-26.64


<b>Measurement uncertainty:</b>	± 1.33 dB
---------------------------------	-----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

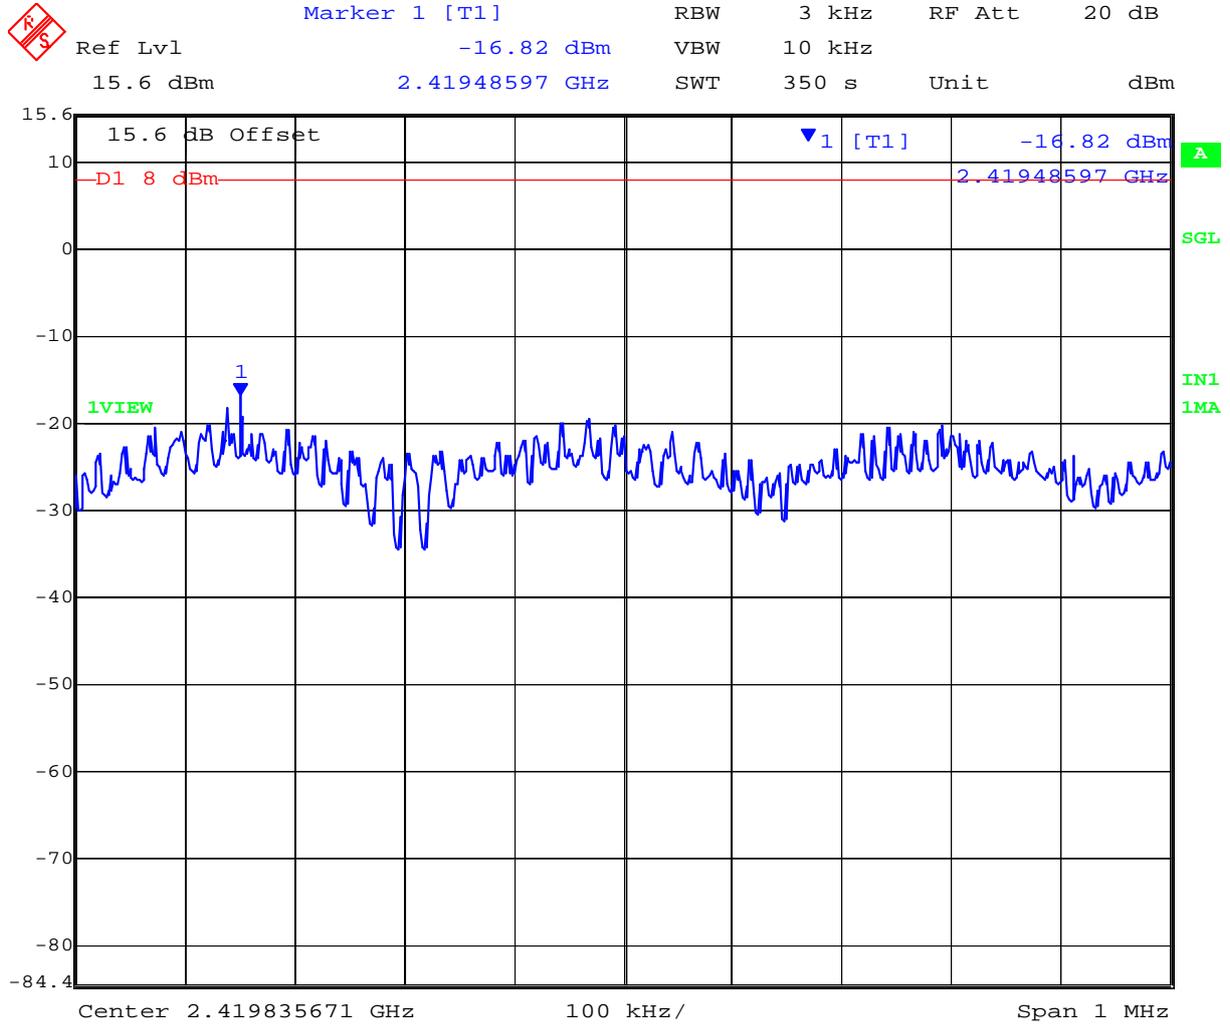

Date: 17.NOV.2011 16:19:31

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

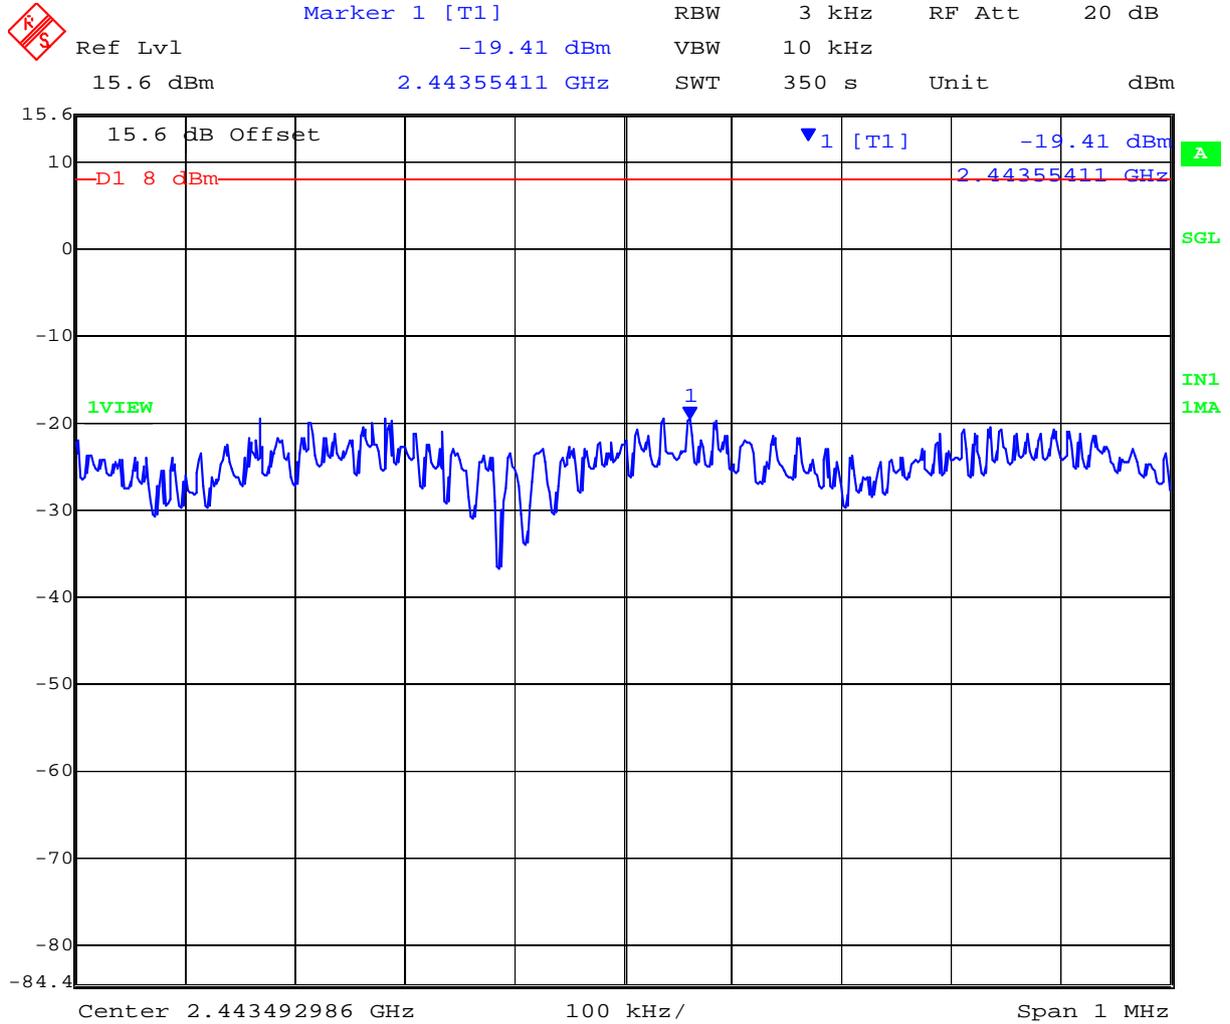


Date: 17.NOV.2011 16:29:46

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Hewlett-Packard SDG0B-1292  
To: FCC 47 CFR Part 15.247 & RSS-210  
Serial #: MARS05-U1 Rev A  
Issue Date: 16<sup>th</sup> July 2012  
Page: Page 61 of 134

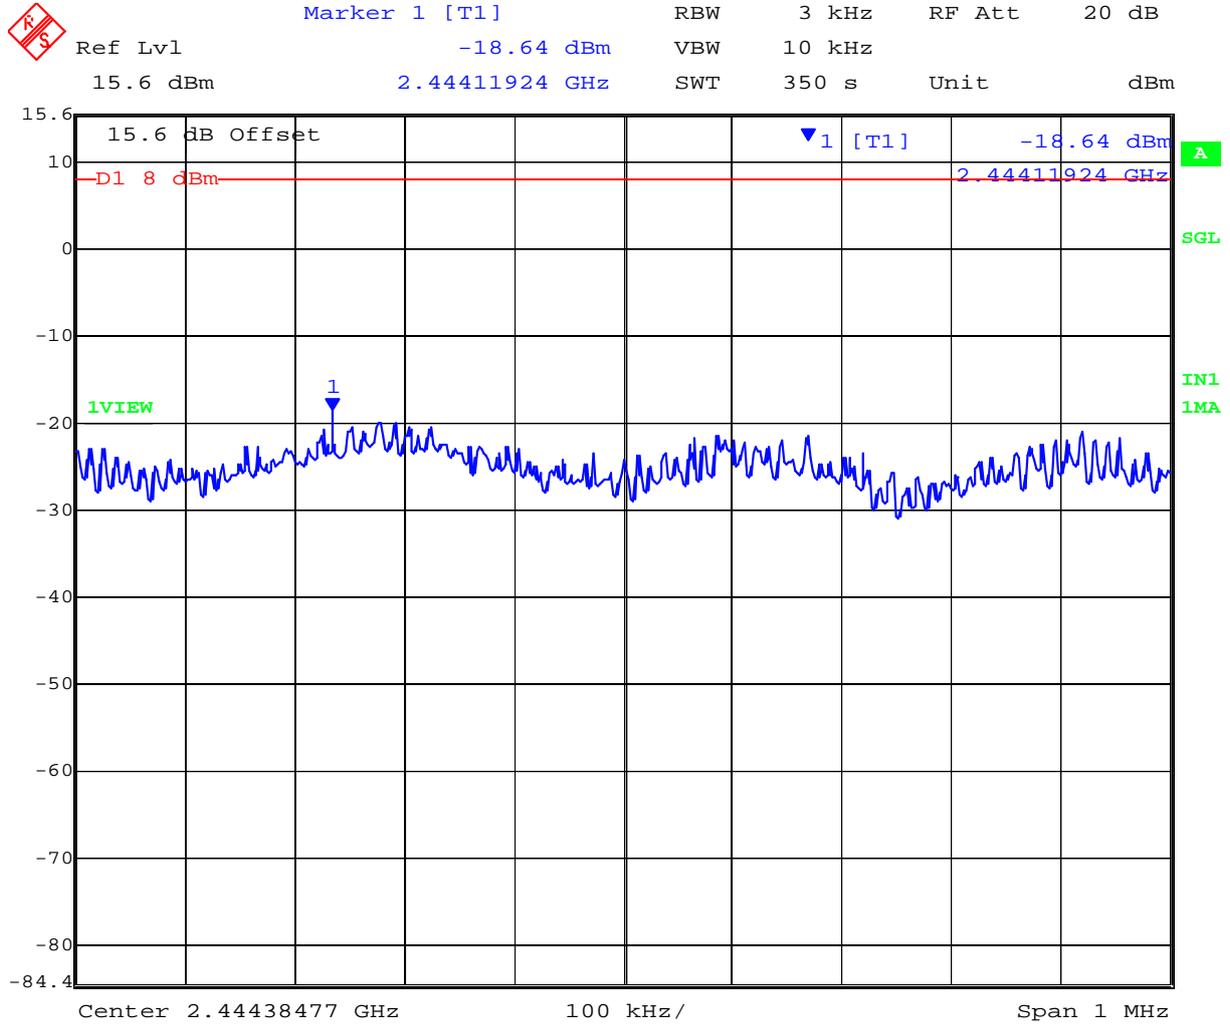

Date: 17.NOV.2011 16:41:42

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


## 7.5 Conducted Spurious Emissions

### Test Procedure

Conducted emissions were measured at a limit of 20 dB below the highest in-band spectral density measured with a spectrum analyzer connected to the antenna terminal. Emissions at the band edge were measured and recorded. Measurements were made while EUT was operating in transmit mode of operation at the appropriate center frequency.

Measurements were made using a combiner with the transmitter tuned to the channel closest to the band-edge being measured. All emissions were maximized during measurement. Limits which were derived from the peak emission.

### Test Configuration

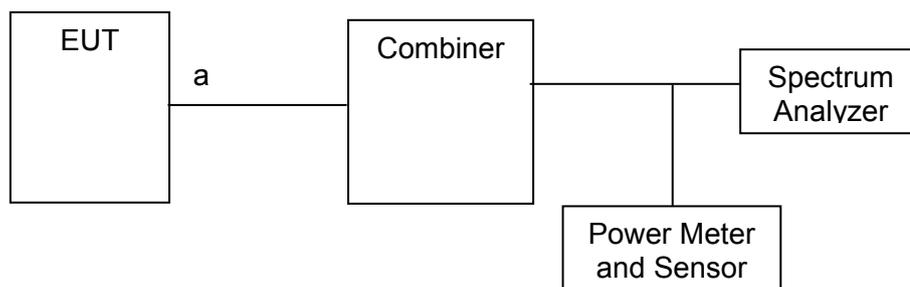

Measurement setup for Conducted Spurious Emission



### Specification for Band Edge Limits

#### FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

#### FCC §15.247(d)

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section §15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(a)).

#### Limits Band-Edge

Lower Limit Band-edge	Upper Limit Band-edge	Limit below highest level of desired power
2,400 MHz	2,483.5 MHz	≥ 20 dB
5725 MHz	5850 MHz	



### Industry Canada RSS-210 §A8.5

Out-of-band Emissions: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section A8.4 (4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

### RSS-GEN 6.2

If the receiver has a detachable antenna of known impedance, antenna conducted spurious emissions measurement is permitted as an alternative to radiated measurement. However, the radiated method of Section 6.1 is recommended:

The antenna conducted test shall be performed with the antenna disconnected and the receiver antenna terminals connected to a measuring instrument having equal impedance to that specified for the antenna

The receiver spurious emissions measured at the antenna terminals by the antenna conducted method shall then comply with the following limits:

Receiver spurious emissions at any discrete frequency shall not exceed 2 nanowatts in the band 30-1000 MHz, and 5 nanowatts above 1000 MHz.

### Traceability

Method	Test Equipment Used
WI-05	0158, 0252, 0313, 0314, 0223, 0116, 0117, 0287, 0363.



**7.5.1 Measurement Results for 802.11b**

<b>Test Conditions:</b>	15.247 (a)(2)	<b>Rel. Humidity (%):</b>	35	to	42
<b>Variant:</b>	802.11b	<b>Ambient Temp. (°C):</b>	19	to	22
<b>TPC:</b>	HIGH	<b>Pressure (mBars):</b>	998	to	1003
<b>Modulation:</b>	ON	<b>Duty Cycle (%):</b>	100		
<b>Beam Forming Gain</b>	N/A dB	<b>Antenna Gain:</b>	N/A	dBi	
<b>Applied Voltage:</b>	3.30 Vdc	<b>Antenna Ports (N):</b>			
<b>Notes 1:</b>					
<b>Notes 2:</b>					

**Conducted Spurious Measurement**

Test Freq.	Start Freq.	Stop Freq.	Port A		Port B		Port C		Port D	
			SE dBm	Limit dBm						
2412.000	30.00	26000.00	-52.08	-14.24						
2437.000	30.00	26000.00	-52.45	-13.74						
2462.000	30.00	26000.00	-53.26	-14.31						

SE: Maximum spurious emission found


**Band-edge Measurement**

Test Freq.	Band-edge freq.	Port A		Port B		Port C		Port D	
		BE dBm	Limit dBm						
2412.000	2400.00	-47.42	-14.52						
2462.000	2483.50	-49.93	-14.09						

BE: Maximum Band edge emission found


<b>Measurement uncertainty:</b>	±2.81 dB
---------------------------------	----------

Note: Limit is based on 20dB down from fundamental emissions

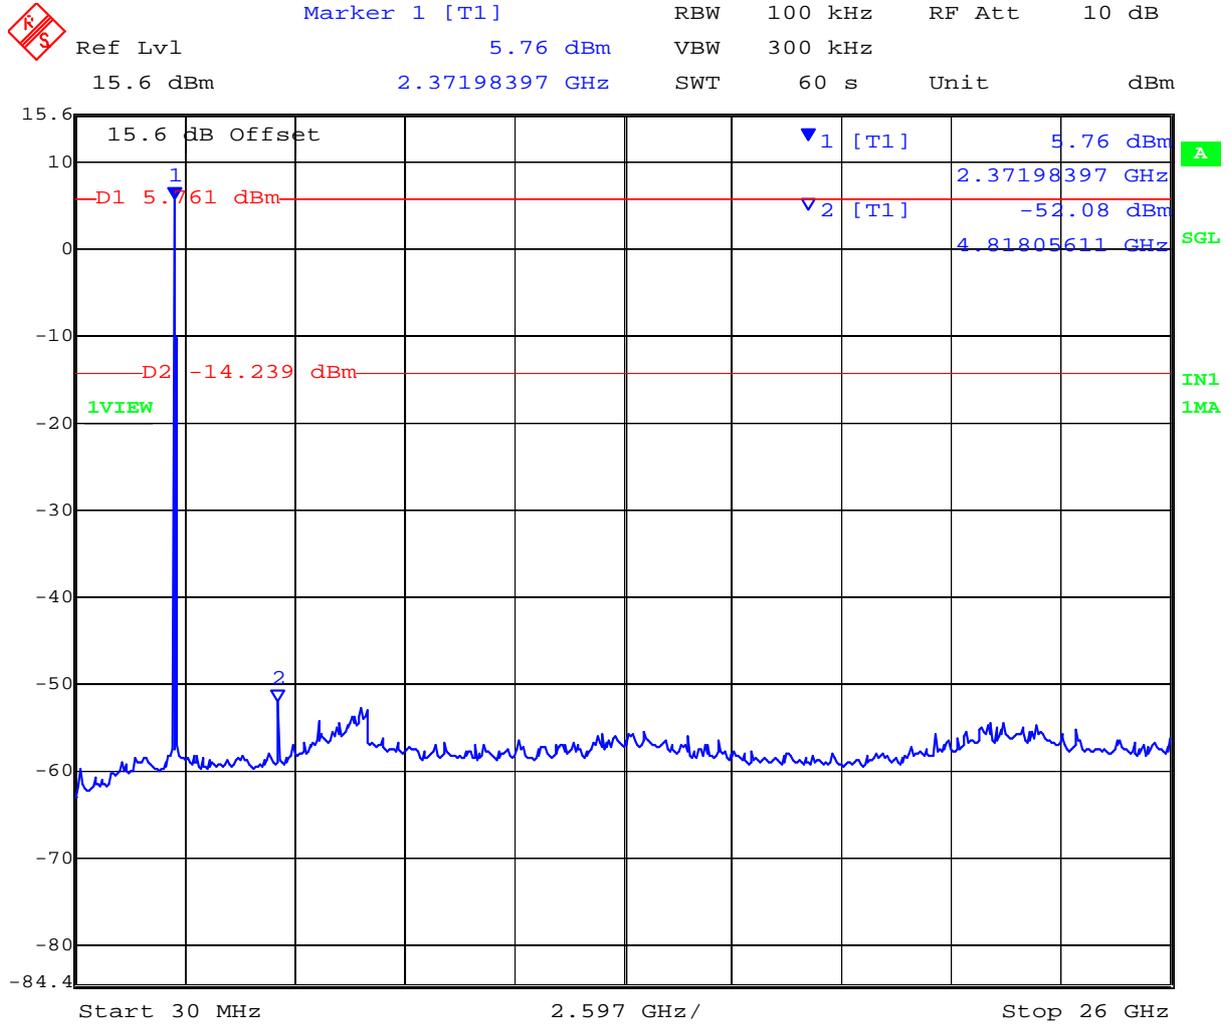


Date: 17.NOV.2011 14:20:25

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

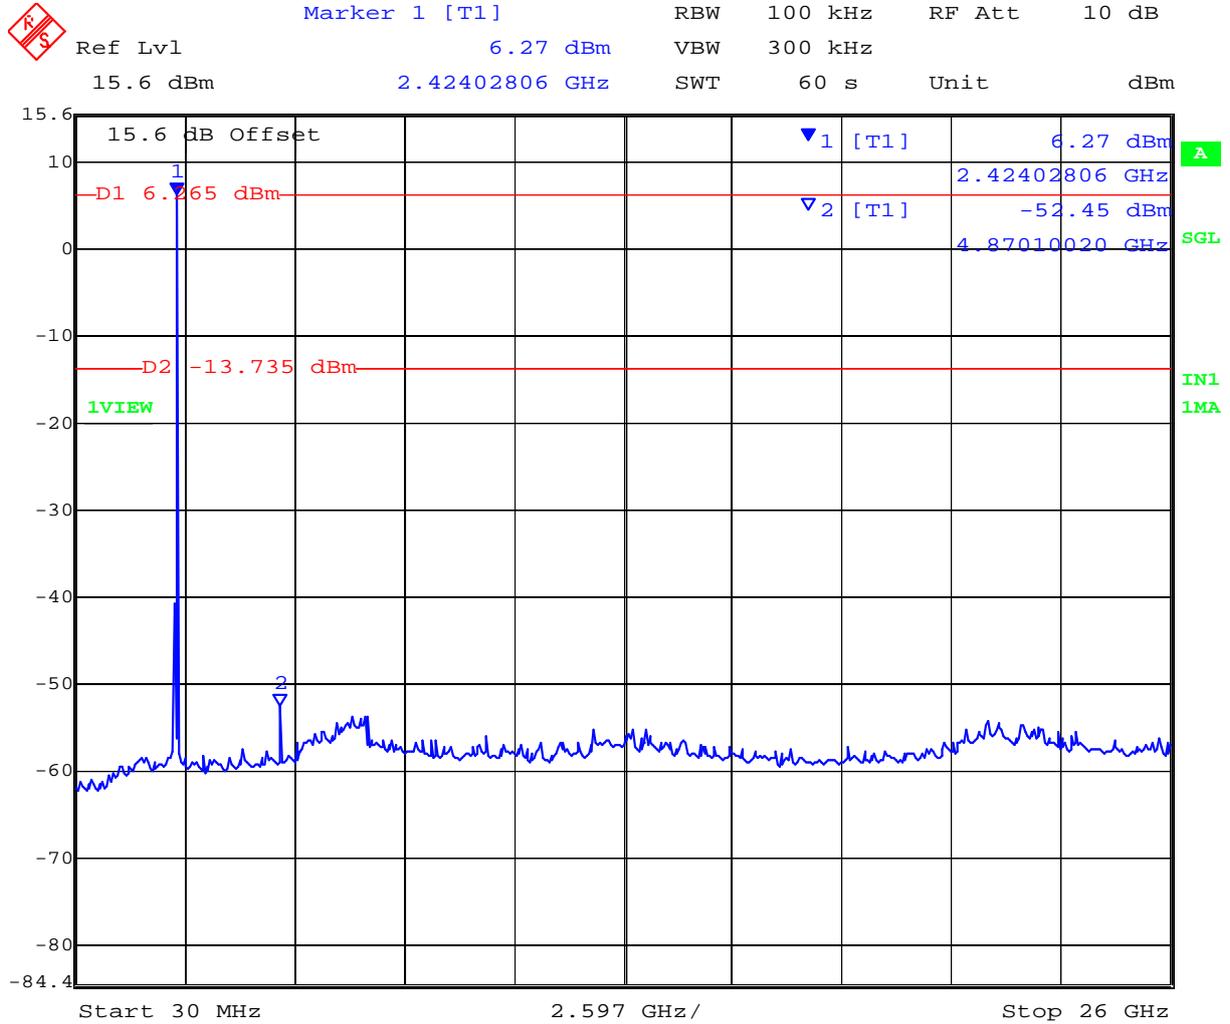


Date: 17.NOV.2011 14:30:34

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

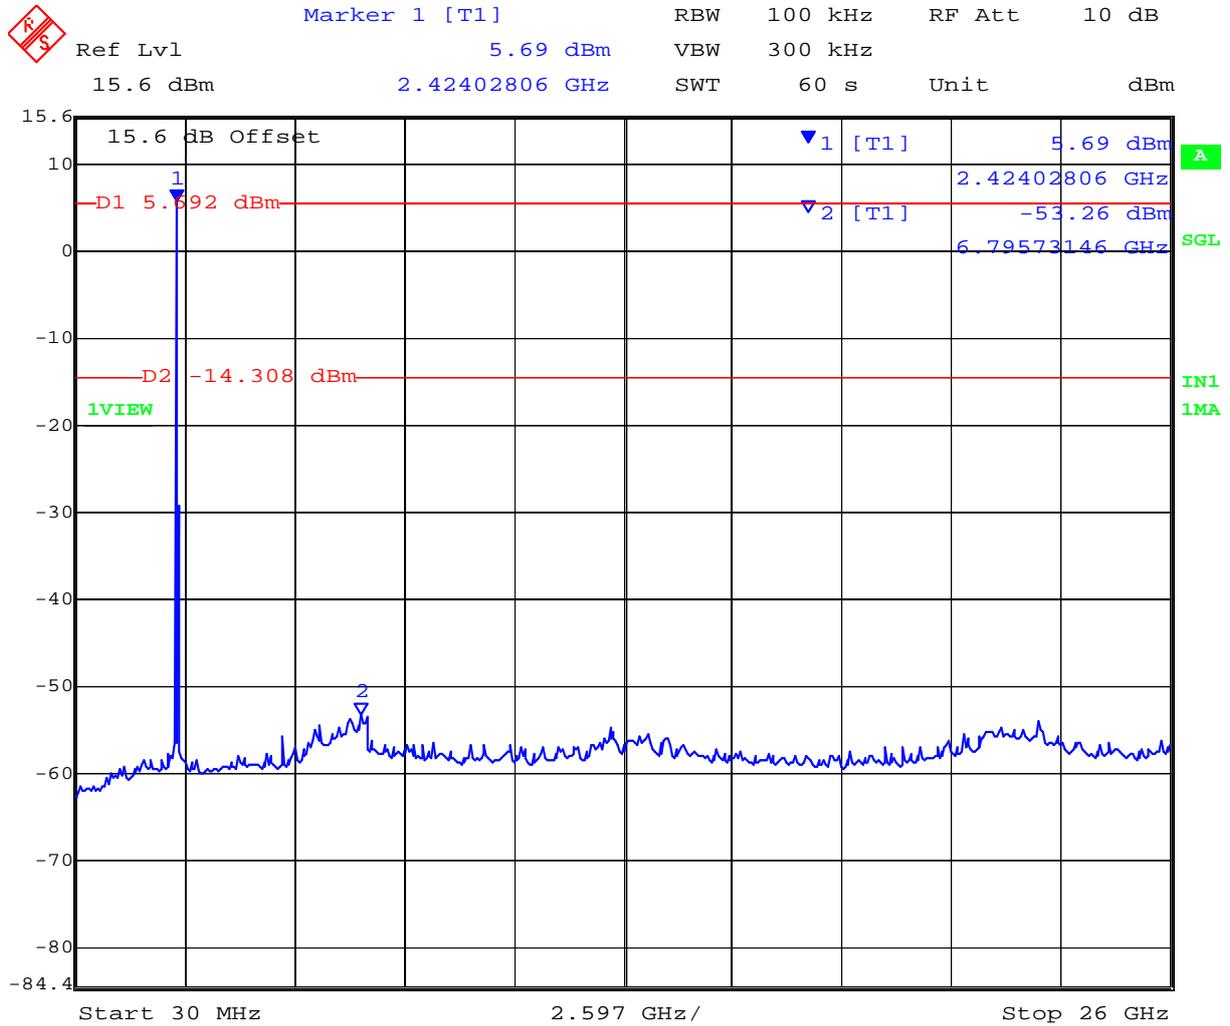


Date: 17.NOV.2011 14:45:18

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

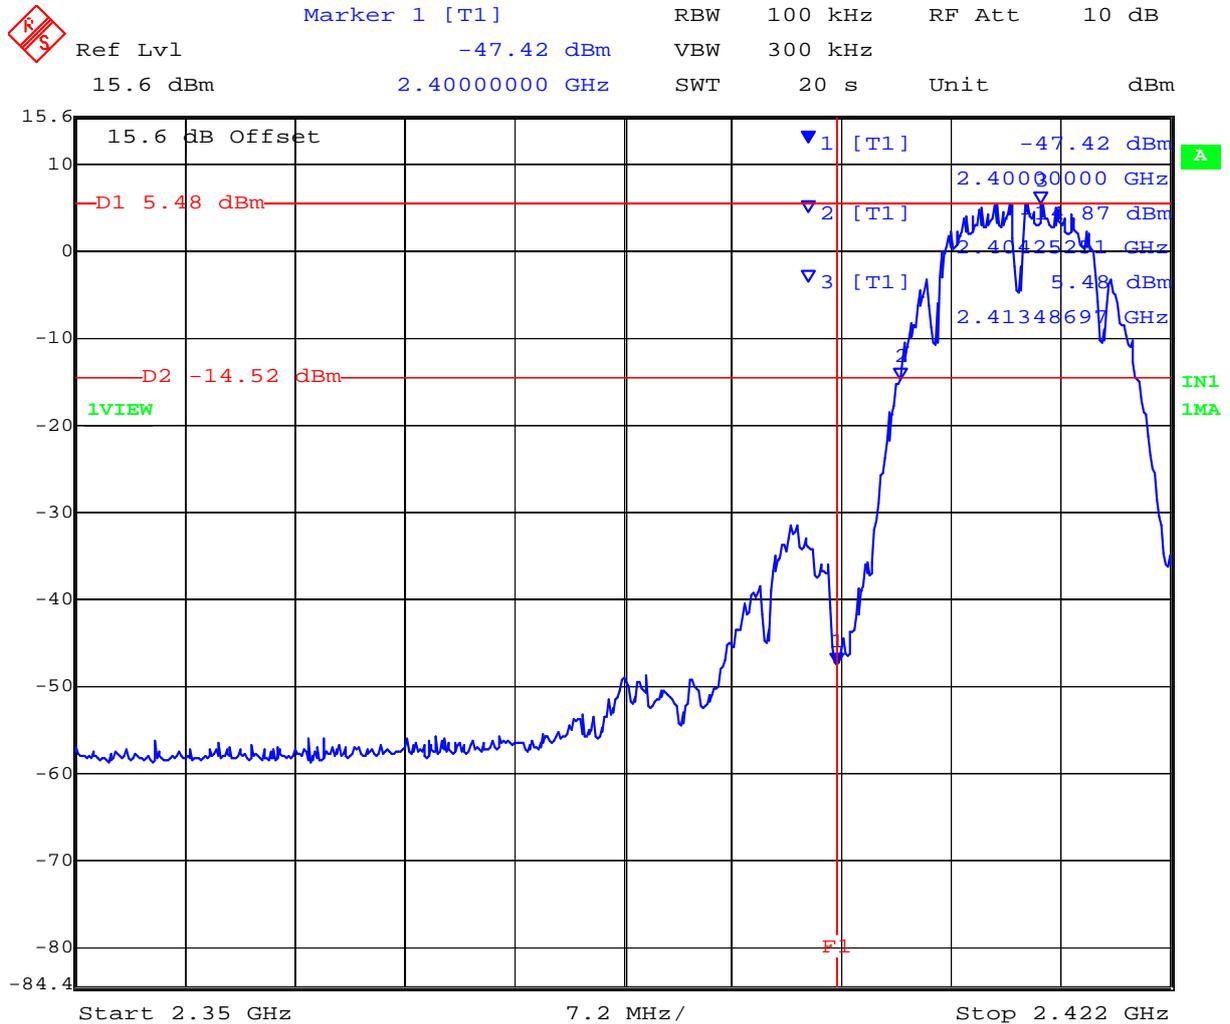

Date: 17.NOV.2011 14:09:35

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

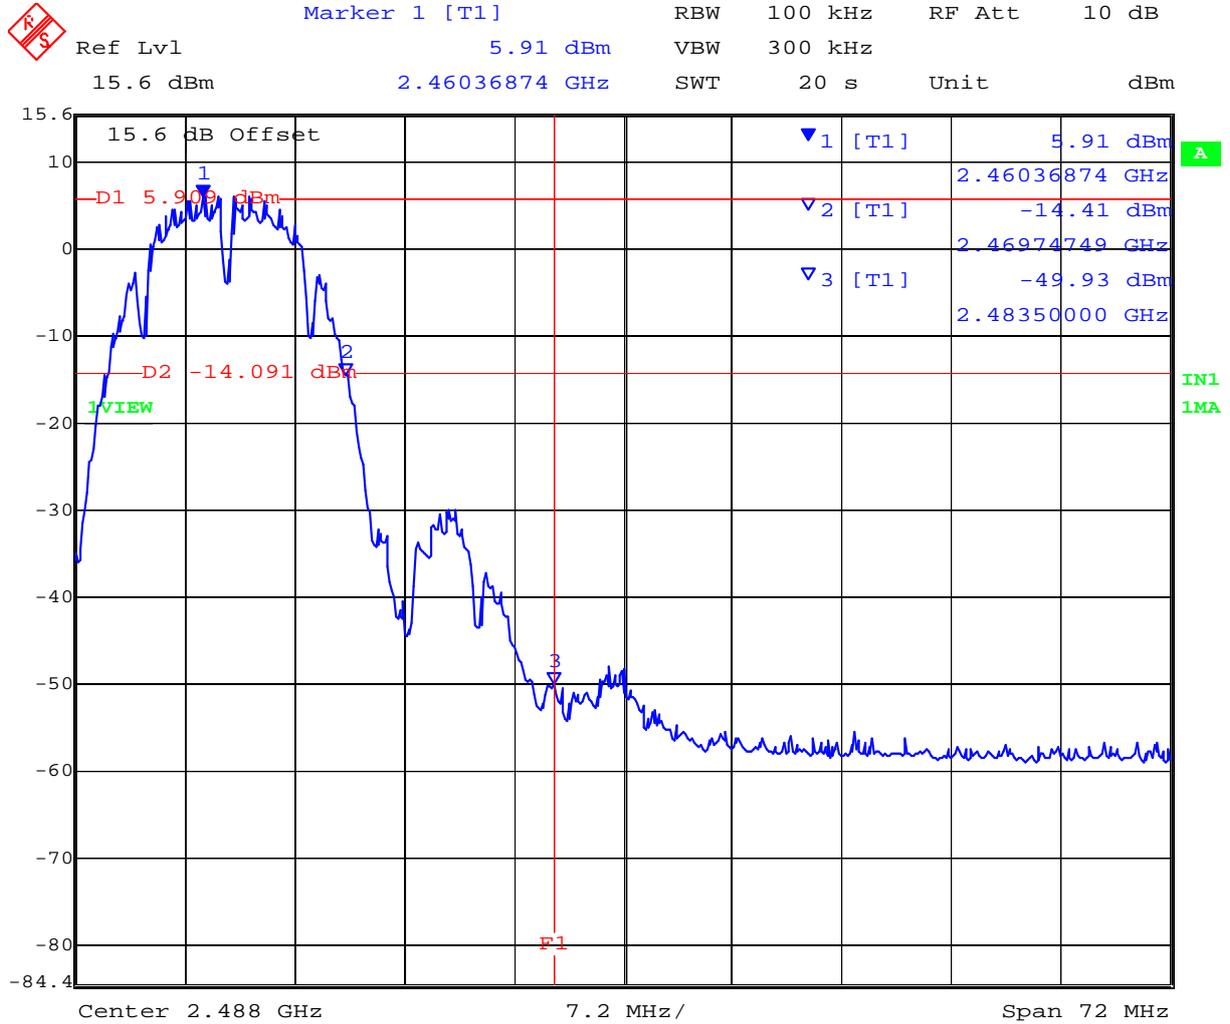

Date: 17.NOV.2011 14:36:41

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**7.5.2 Measurement Results for 802.11g**

<b>Test Conditions:</b>	15.247 (a)(2)	<b>Rel. Humidity (%):</b>	35	to	42
<b>Variant:</b>	802.11g	<b>Ambient Temp. (°C):</b>	19	to	22
<b>TPC:</b>	HIGH	<b>Pressure (mBars):</b>	998	to	1003
<b>Modulation:</b>	ON	<b>Duty Cycle (%):</b>	100		
<b>Beam Forming Gain</b>	N/A dB	<b>Antenna Gain:</b>	N/A dBi		
<b>Applied Voltage:</b>	3.30 Vdc	<b>Antenna Ports (N):</b>			
<b>Notes 1:</b>					
<b>Notes 2:</b>					

**Conducted Spurious Measurement**

Test Freq.	Start Freq.	Stop Freq.	Port A		Port B		Port C		Port D	
			SE dBm	Limit dBm						
2412.000	30.00	26000.00	-53.30	-20.06						
2437.000	30.00	26000.00	-52.66	-19.06						
2462.000	30.00	26000.00	-53.82	-20.92						

SE: Maximum spurious emission found

**Band-edge Measurement**

Test Freq.	Band-edge freq.	Port A		Port B		Port C		Port D	
		BE dBm	Limit dBm						
2412.000	2400.00	-31.62	-17.91						
2462.000	2483.50	-42.76	-17.66						

BE: Maximum Band edge emission found


<b>Measurement uncertainty:</b>	±2.81 dB
---------------------------------	----------

Note: Limit is based on 20dB down from fundamental emissions




Date: 17.NOV.2011 15:01:48

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

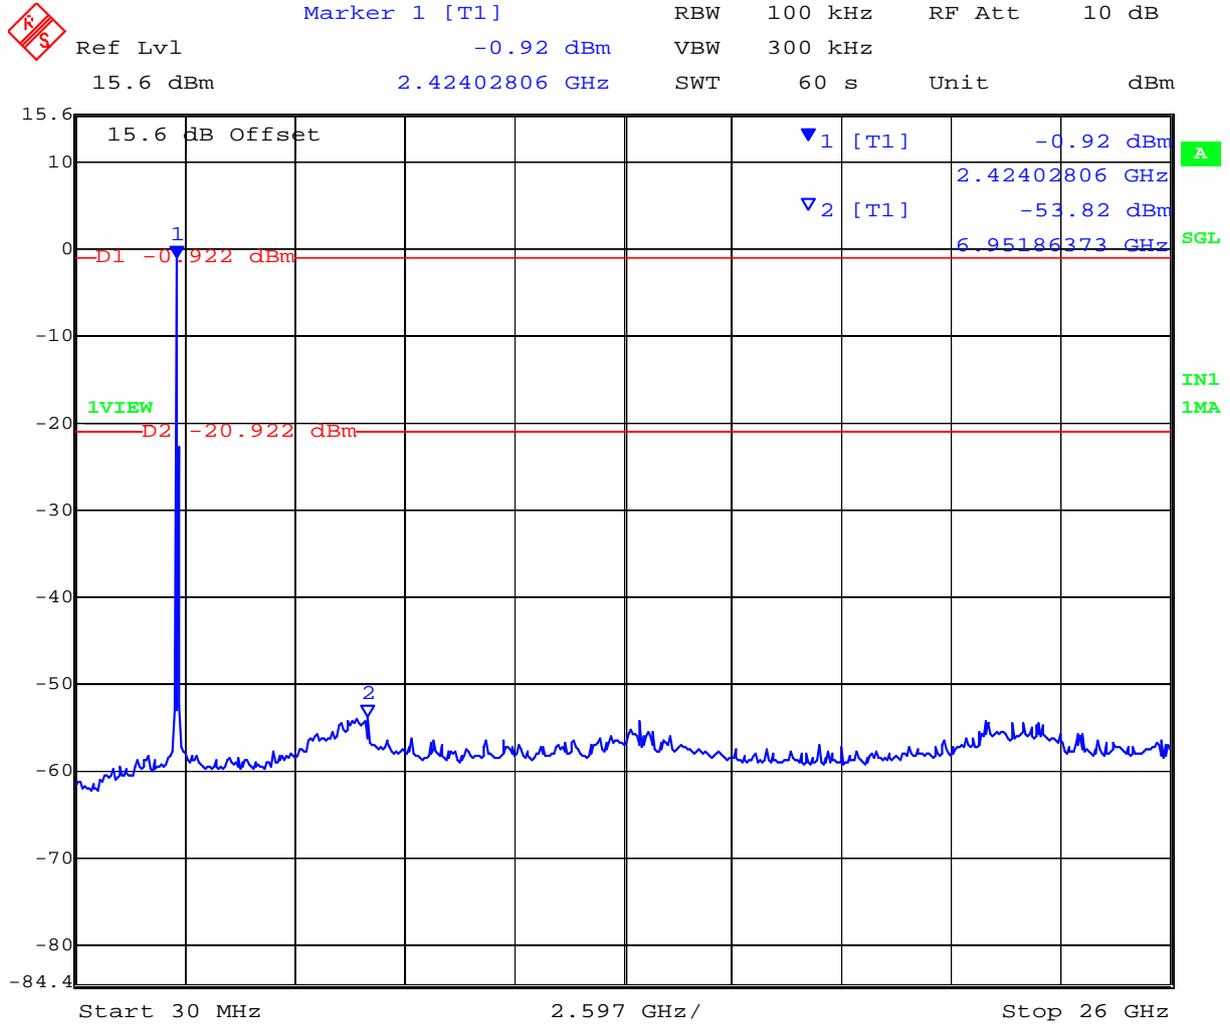


Date: 17.NOV.2011 15:23:26

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

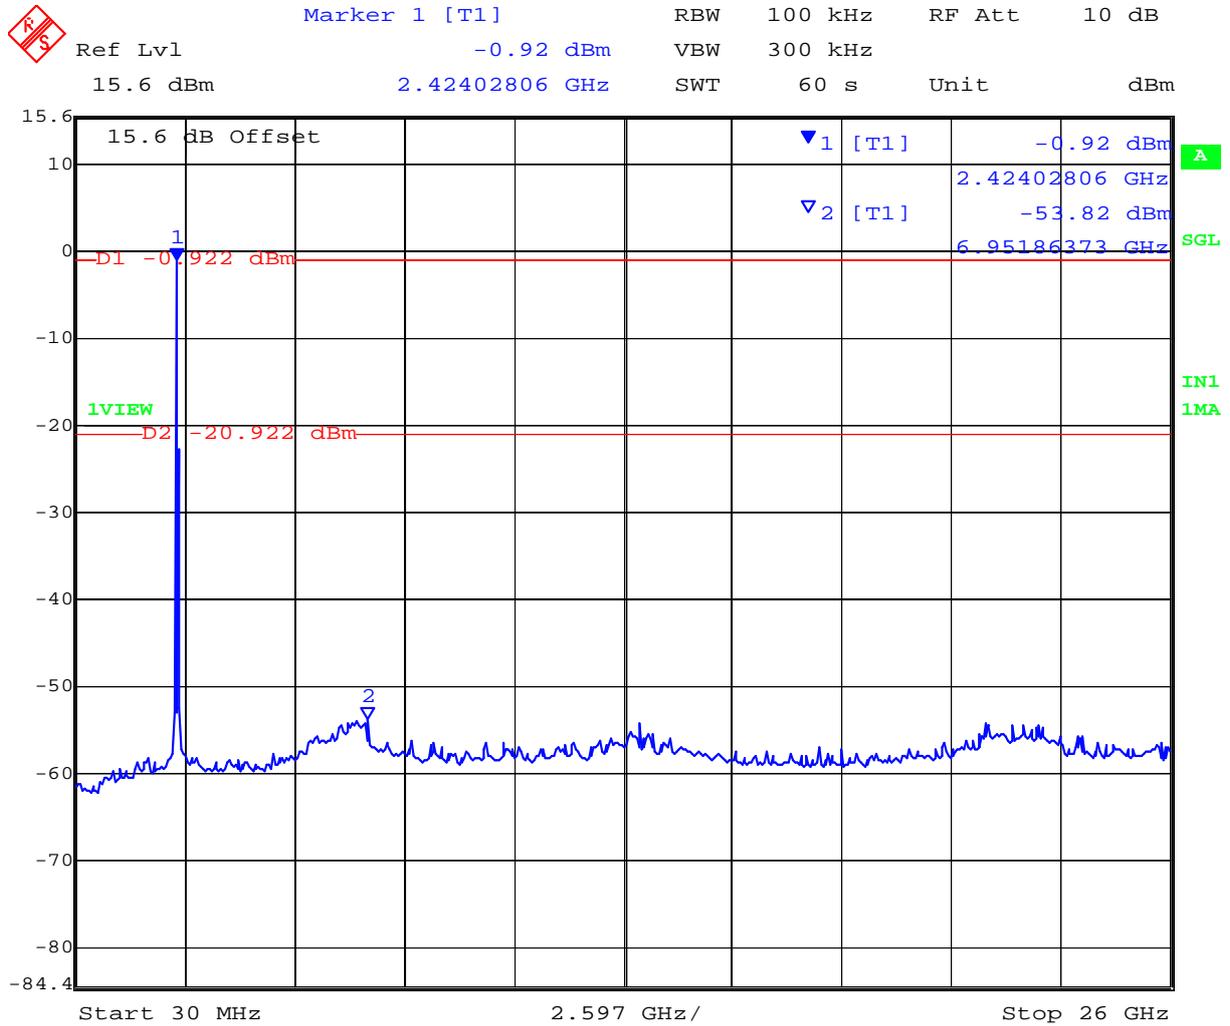


Date: 17.NOV.2011 15:23:26

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

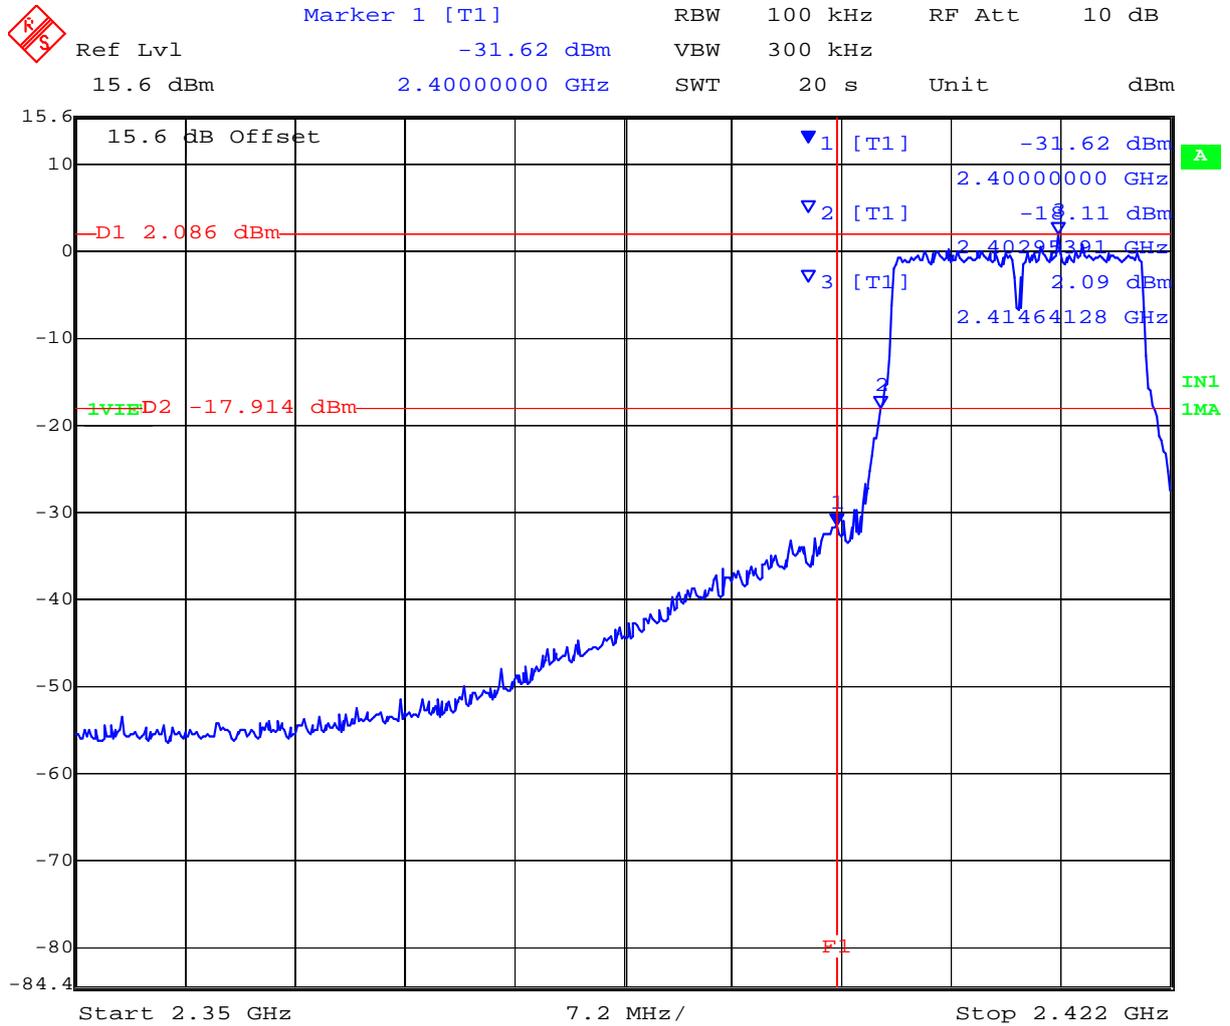

Date: 17.NOV.2011 14:53:15

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

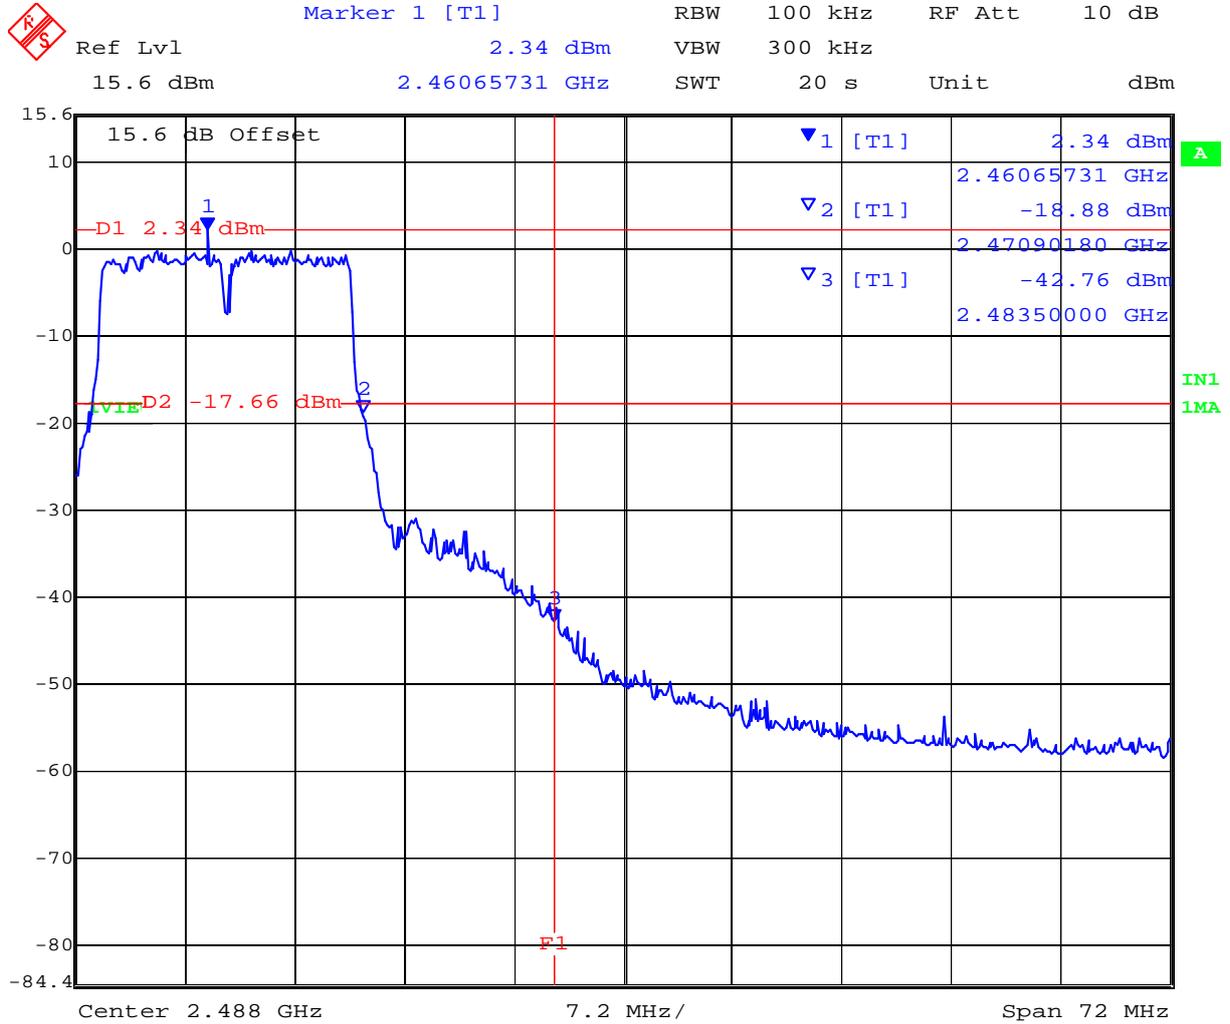

Date: 17.NOV.2011 15:14:51

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 7.5.3 Measurement Results for 802.11n HT-20

<b>Test Conditions:</b>	15.247 (a)(2)	<b>Rel. Humidity (%):</b>	35	to	42
<b>Variant:</b>	802.11n HT-20	<b>Ambient Temp. (°C):</b>	19	to	22
<b>TPC:</b>	HIGH	<b>Pressure (mBars):</b>	998	to	1003
<b>Modulation:</b>	ON	<b>Duty Cycle (%):</b>	100		
<b>Beam Forming Gain</b>	N/A dB	<b>Antenna Gain:</b>	N/A		dBi
<b>Applied Voltage:</b>	3.30 Vdc	<b>Antenna Ports (N):</b>			
<b>Notes 1:</b>					
<b>Notes 2:</b>					

#### Conducted Spurious Measurement

Test Freq.	Start Freq.	Stop Freq.	Port A		Port B		Port C		Port D	
			SE dBm	Limit dBm						
2412.000	30.00	26000.00	-54.02	-20.61						
2437.000	30.00	26000.00	-52.99	-20.71						
2462.000	30.00	26000.00	-52.37	-21.83						

SE: Maximum spurious emission found


#### Band-edge Measurement

Test Freq.	Band-edge freq.	Port A		Port B		Port C		Port D	
		BE dBm	Limit dBm						
2412.000	2400.00	-35.93	-20.40						
2462.000	2483.50	-41.98	-21.38						

BE: Maximum Band edge emission found


<b>Measurement uncertainty:</b>	±2.81 dB
---------------------------------	----------

Note: Limit is based on 20dB down from fundamental emissions

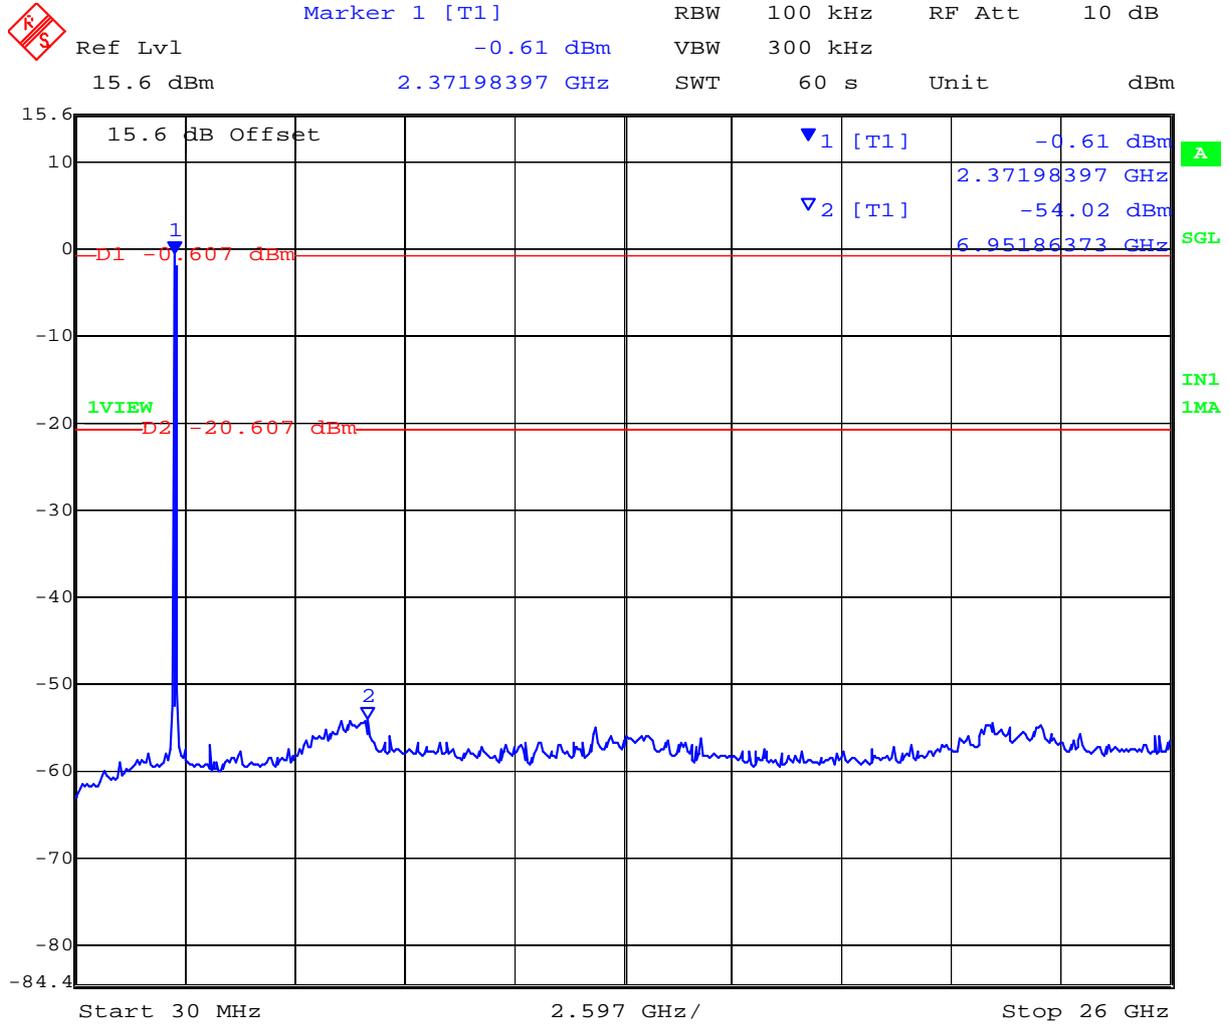


Date: 17.NOV.2011 15:47:16

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

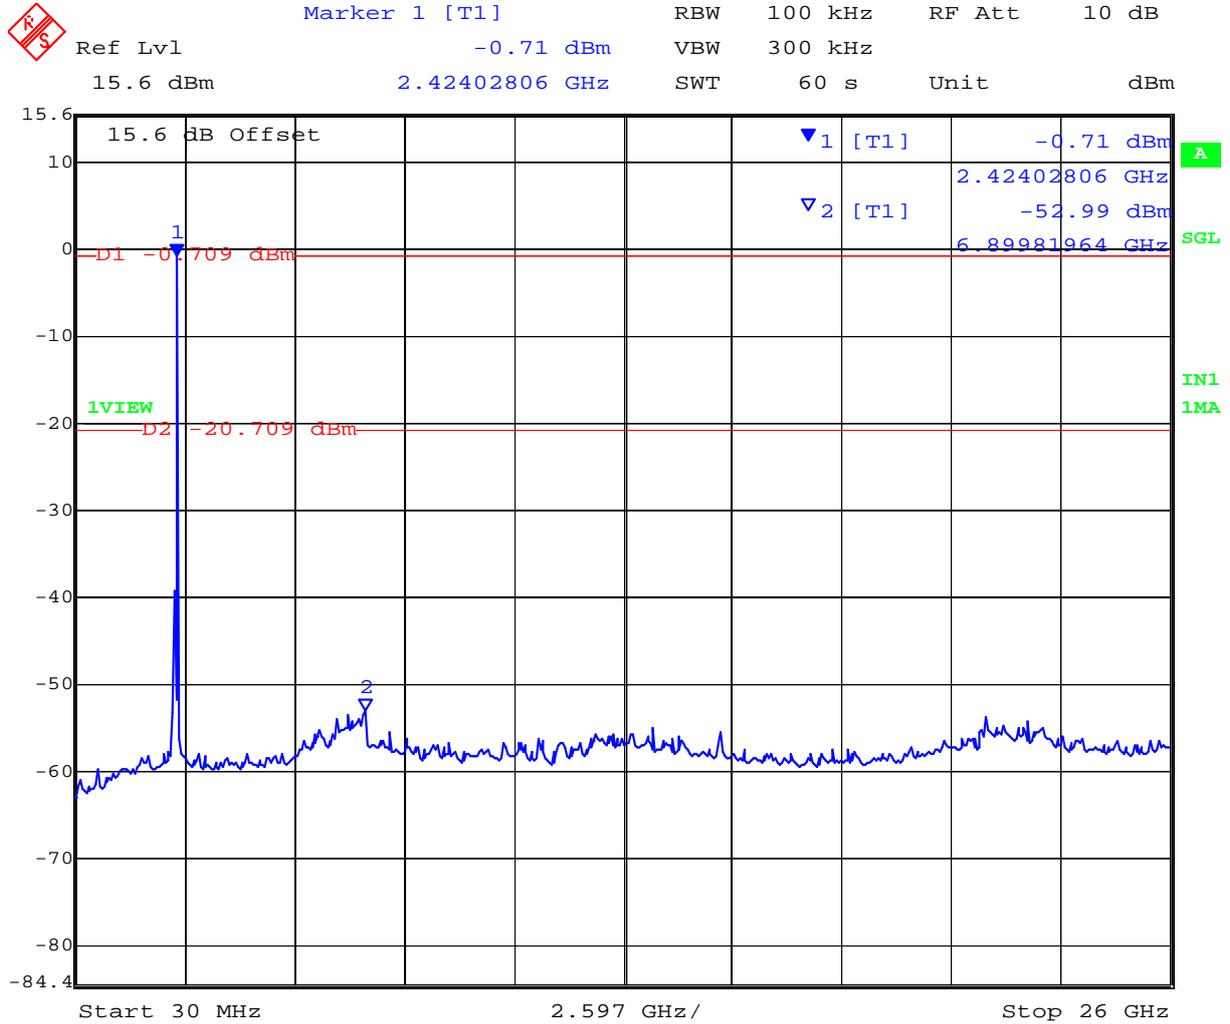


Date: 17.NOV.2011 15:57:22

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

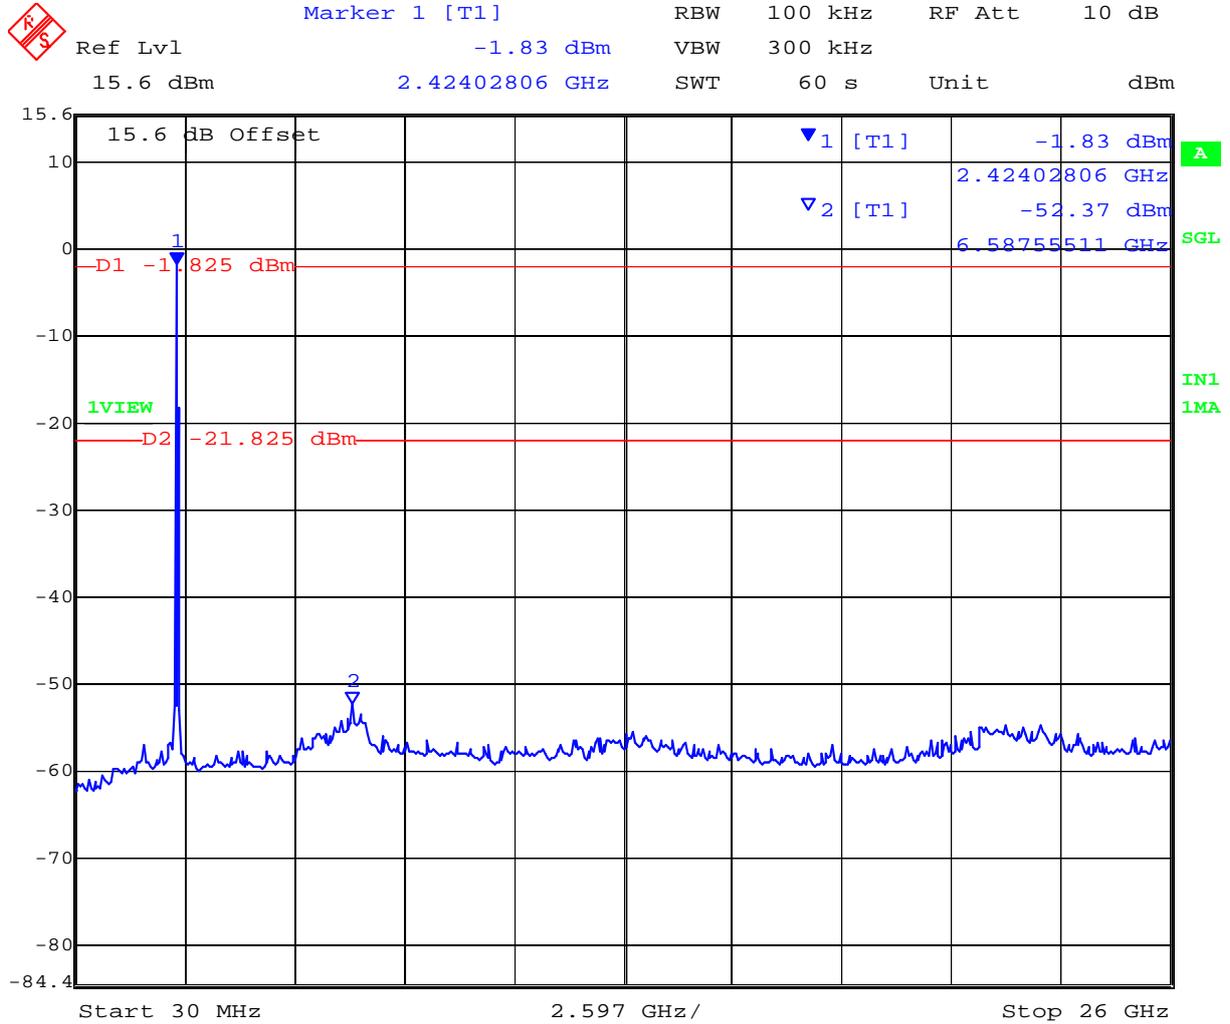


Date: 17.NOV.2011 16:09:17

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

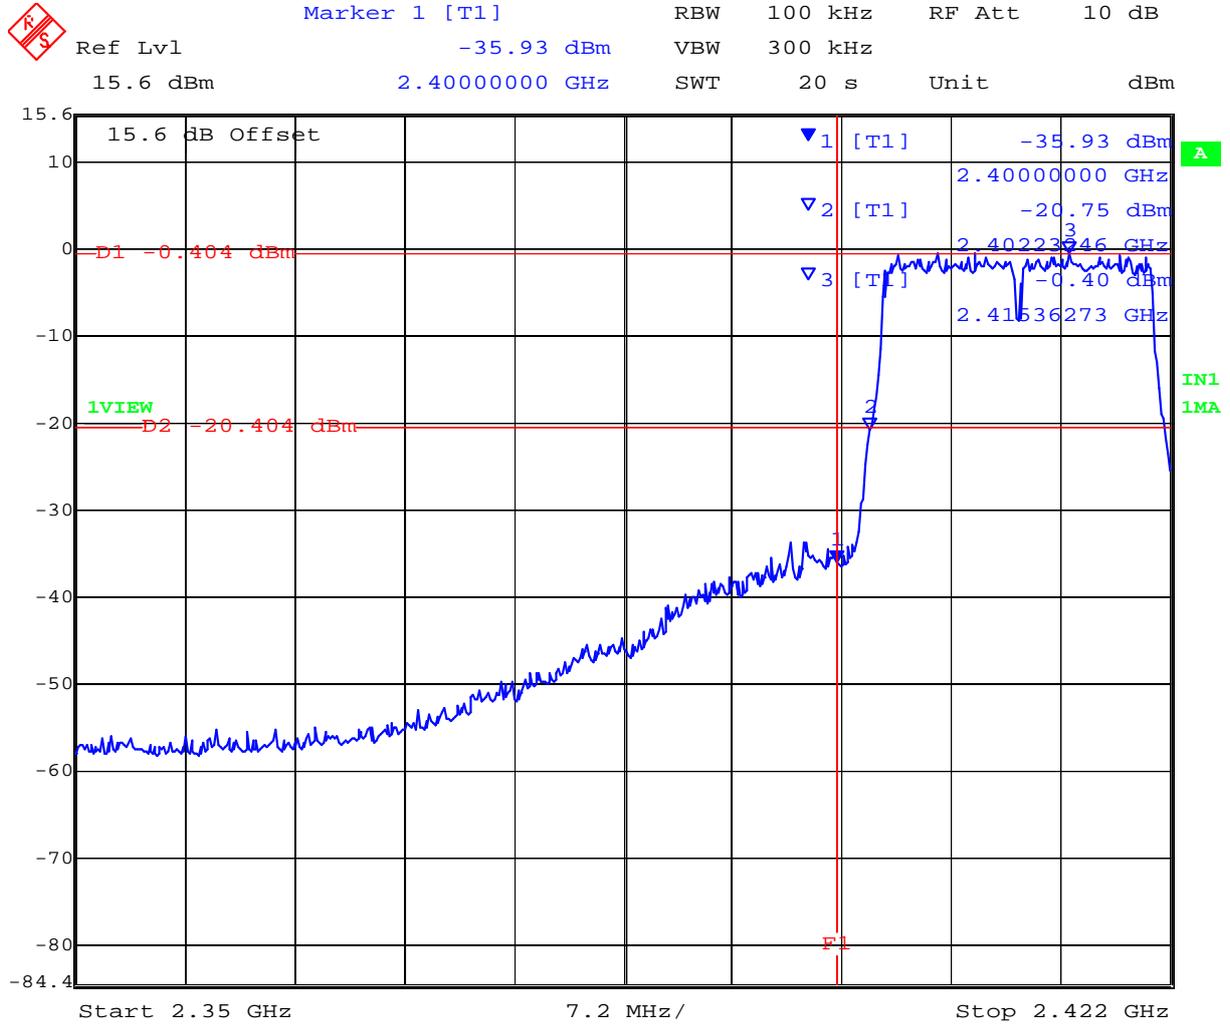

Date: 17.NOV.2011 15:38:42

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

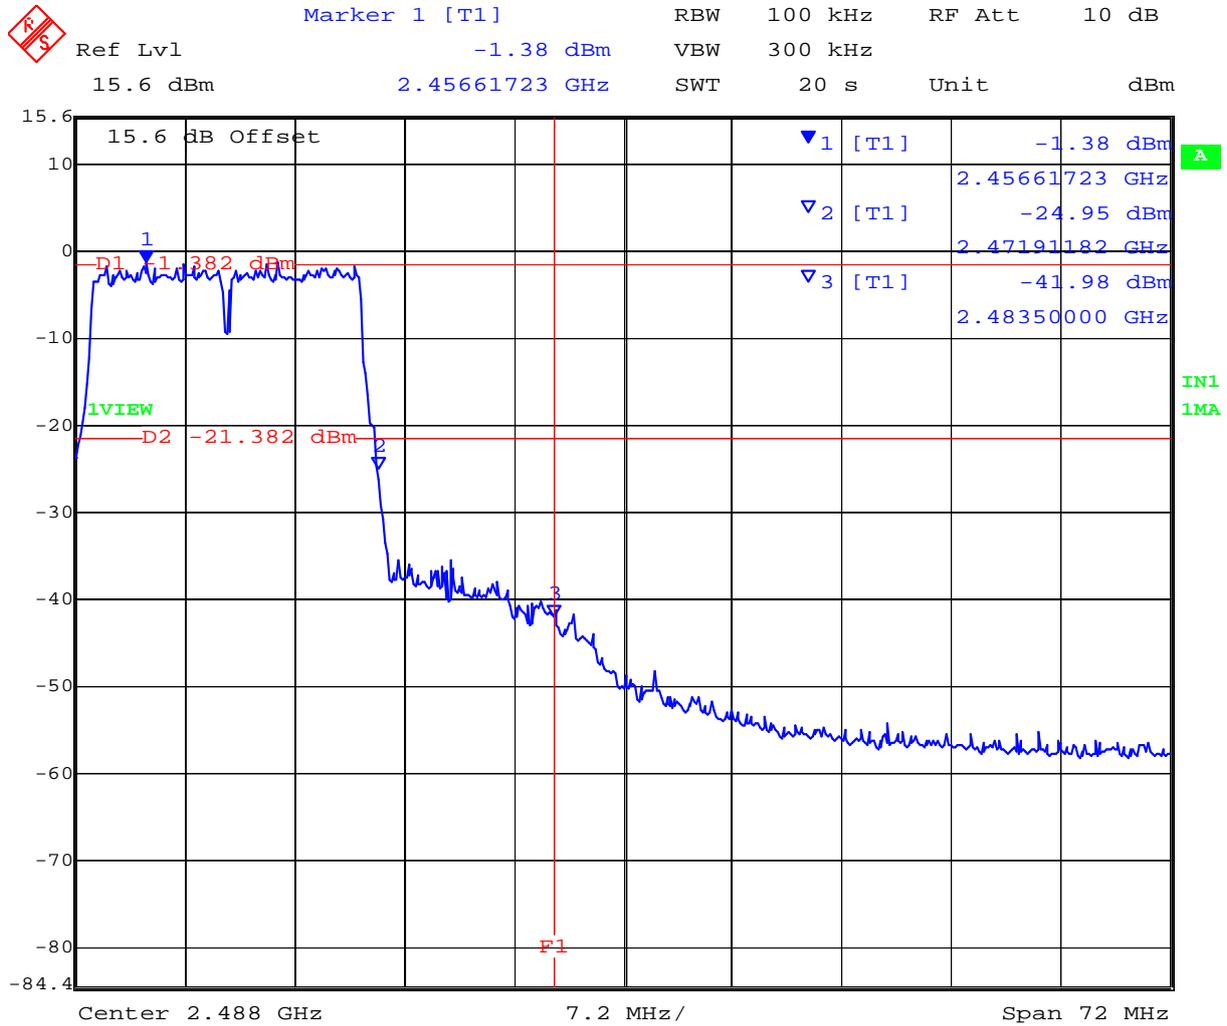

Date: 17.NOV.2011 16:00:35

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**7.5.4 Measurement Results for 802.11n HT-40**

<b>Test Conditions:</b>	15.247 (a)(2)	<b>Rel. Humidity (%):</b>	35	to	42
<b>Variant:</b>	802.11n HT-40	<b>Ambient Temp. (°C):</b>	19	to	22
<b>TPC:</b>	HIGH	<b>Pressure (mBars):</b>	998	to	1003
<b>Modulation:</b>	ON	<b>Duty Cycle (%):</b>	100		
<b>Beam Forming Gain</b>	N/A dB	<b>Antenna Gain:</b>	N/A dBi		
<b>Applied Voltage:</b>	3.30 Vdc	<b>Antenna Ports (N):</b>			
<b>Notes 1:</b>					
<b>Notes 2:</b>					

**Conducted Spurious Measurement**

Test Freq.	Start Freq.	Stop Freq.	Port A		Port B		Port C		Port D	
			SE dBm	Limit dBm						
2422.000	30.00	26000.00	-53.31	-25.73						
2437.000	30.00	26000.00	-53.88	-25.90						
2452.000	30.00	26000.00	-52.92	-26.97						

SE: Maximum spurious emission found


**Band-edge Measurement**

Test Freq.	Band-edge freq.	Port A		Port B		Port C		Port D	
		BE dBm	Limit dBm						
2422.000	2400.00	-39.28	-25.70						
2452.000	2483.50	-44.33	-25.47						

BE: Maximum Band edge emission found


<b>Measurement uncertainty:</b>	±2.81 dB
---------------------------------	----------

Note: Limit is based on 20dB down from fundamental emissions

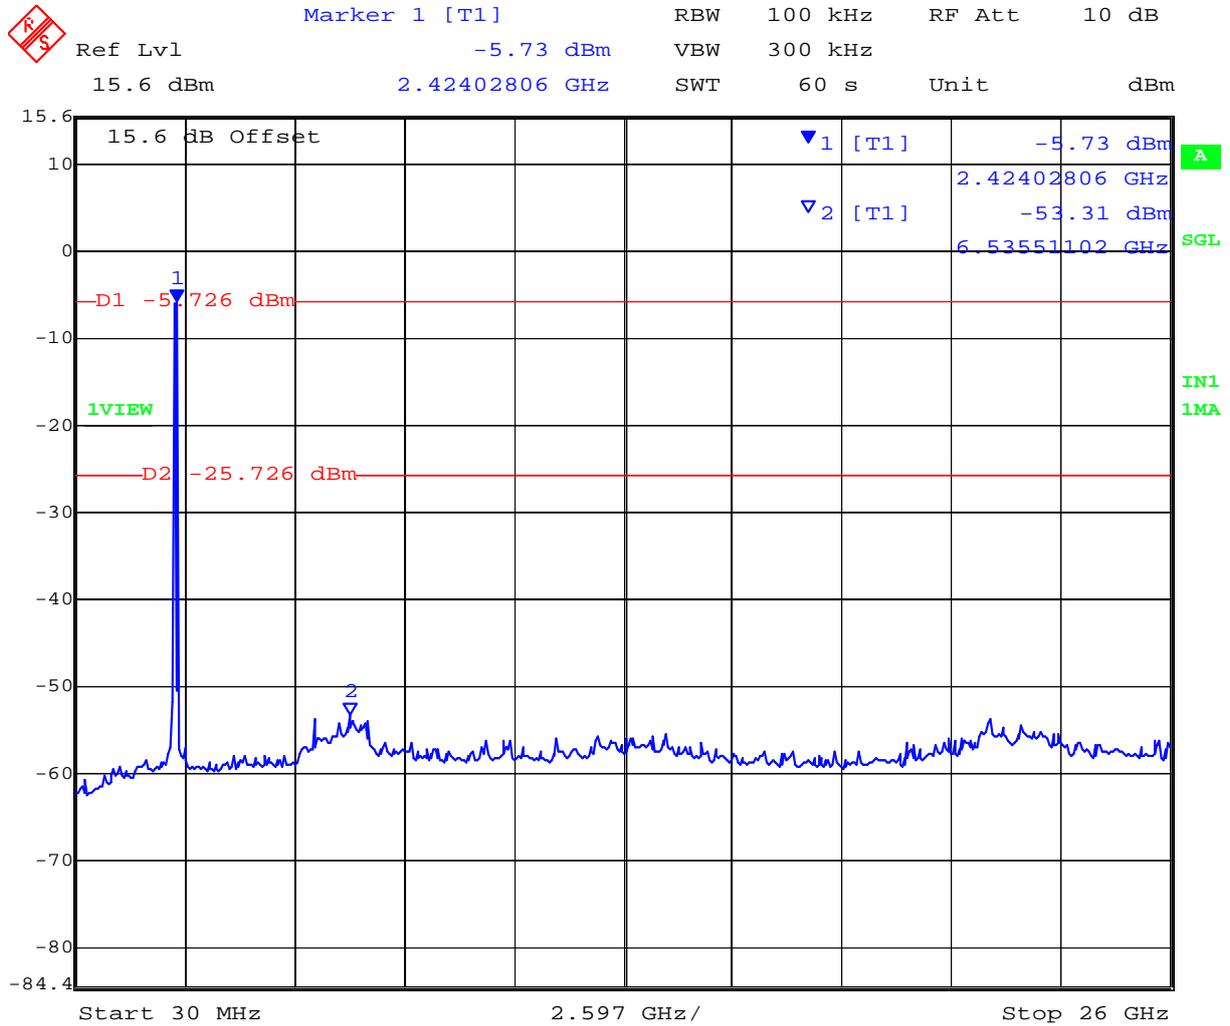


Date: 17.NOV.2011 16:21:38

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

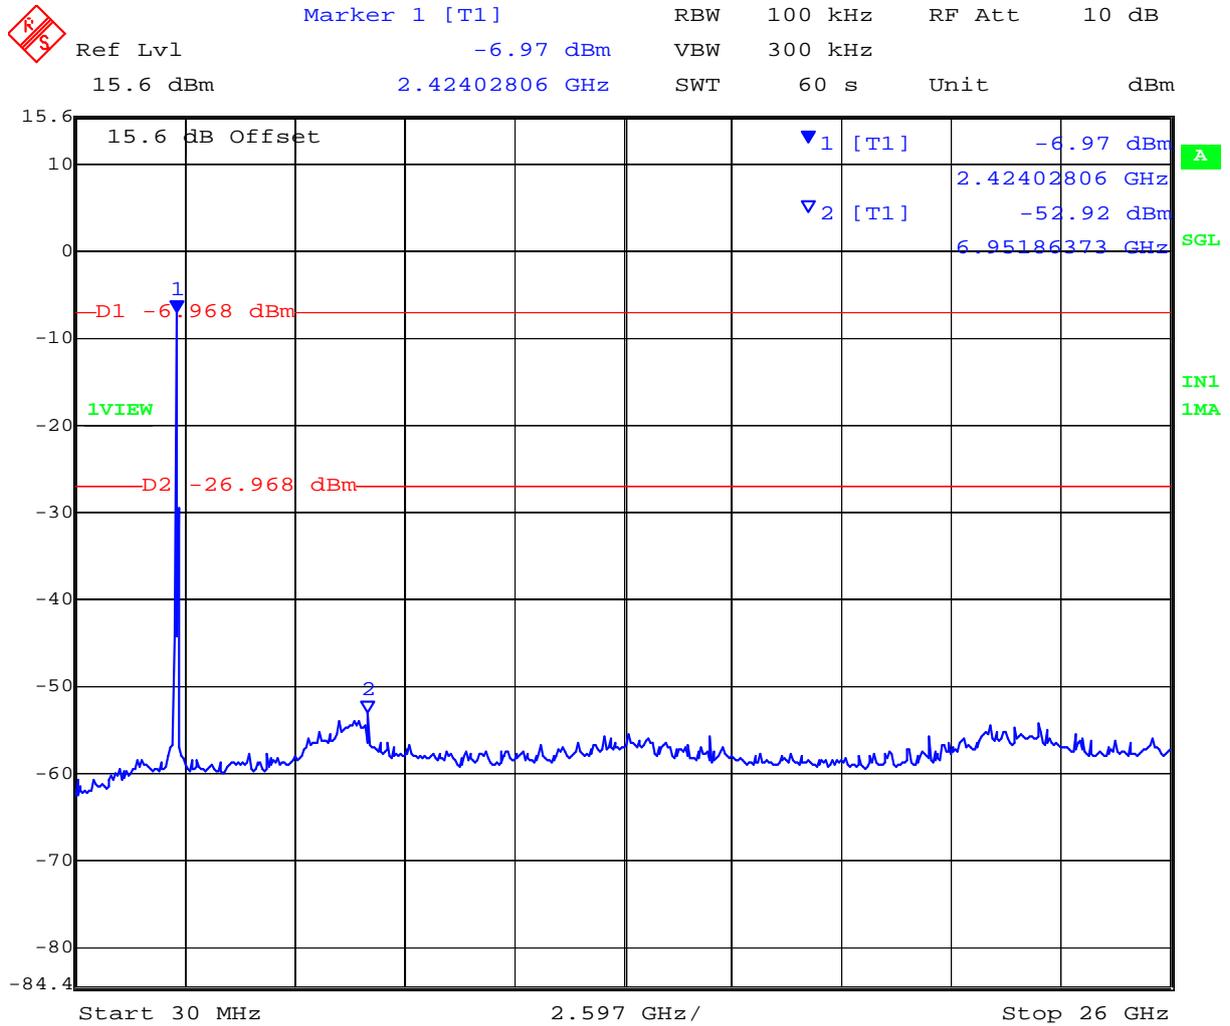


Date: 17.NOV.2011 16:43:49

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

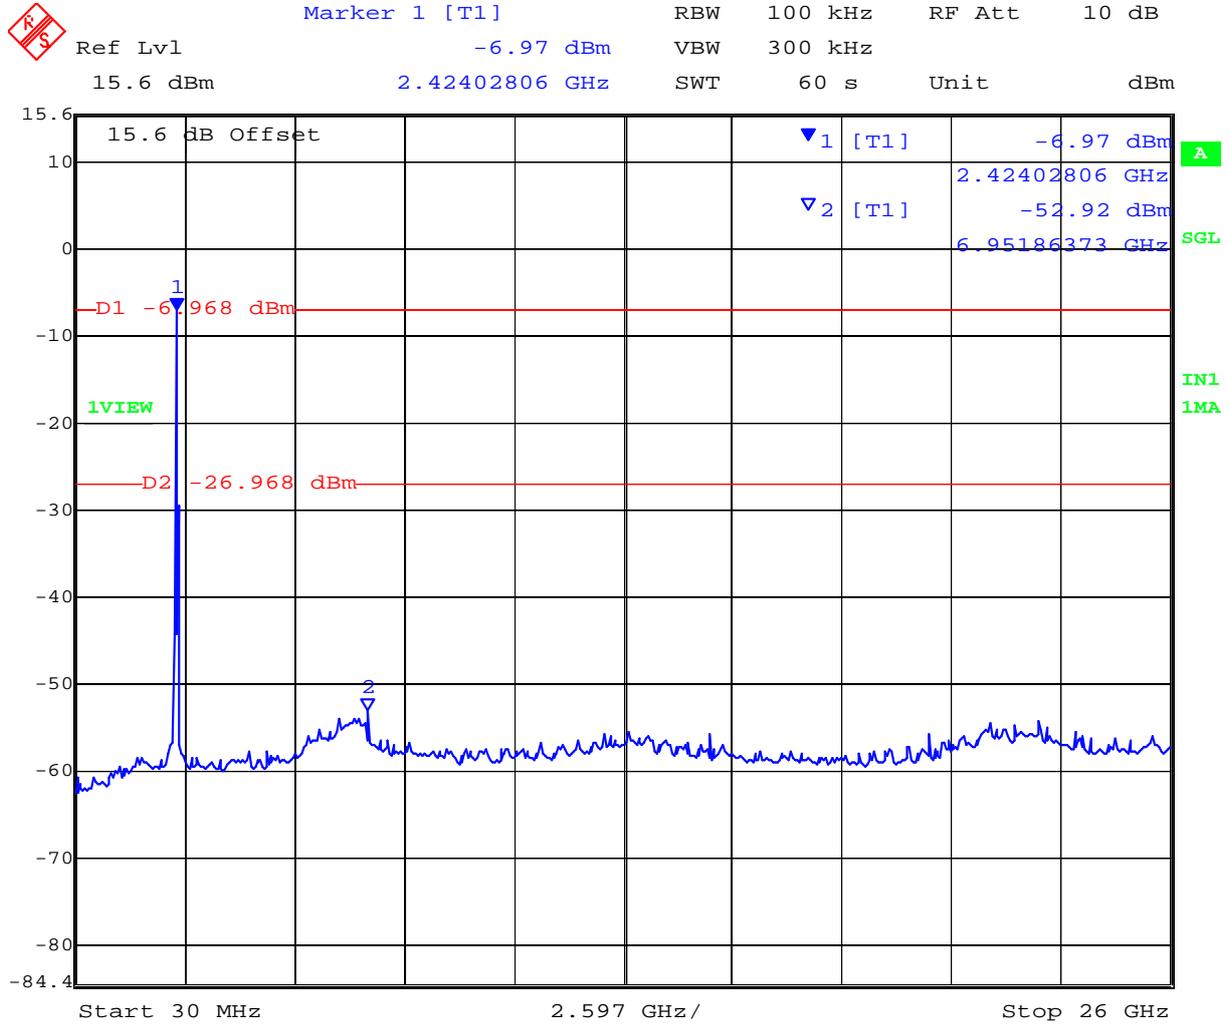


Date: 17.NOV.2011 16:43:49

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

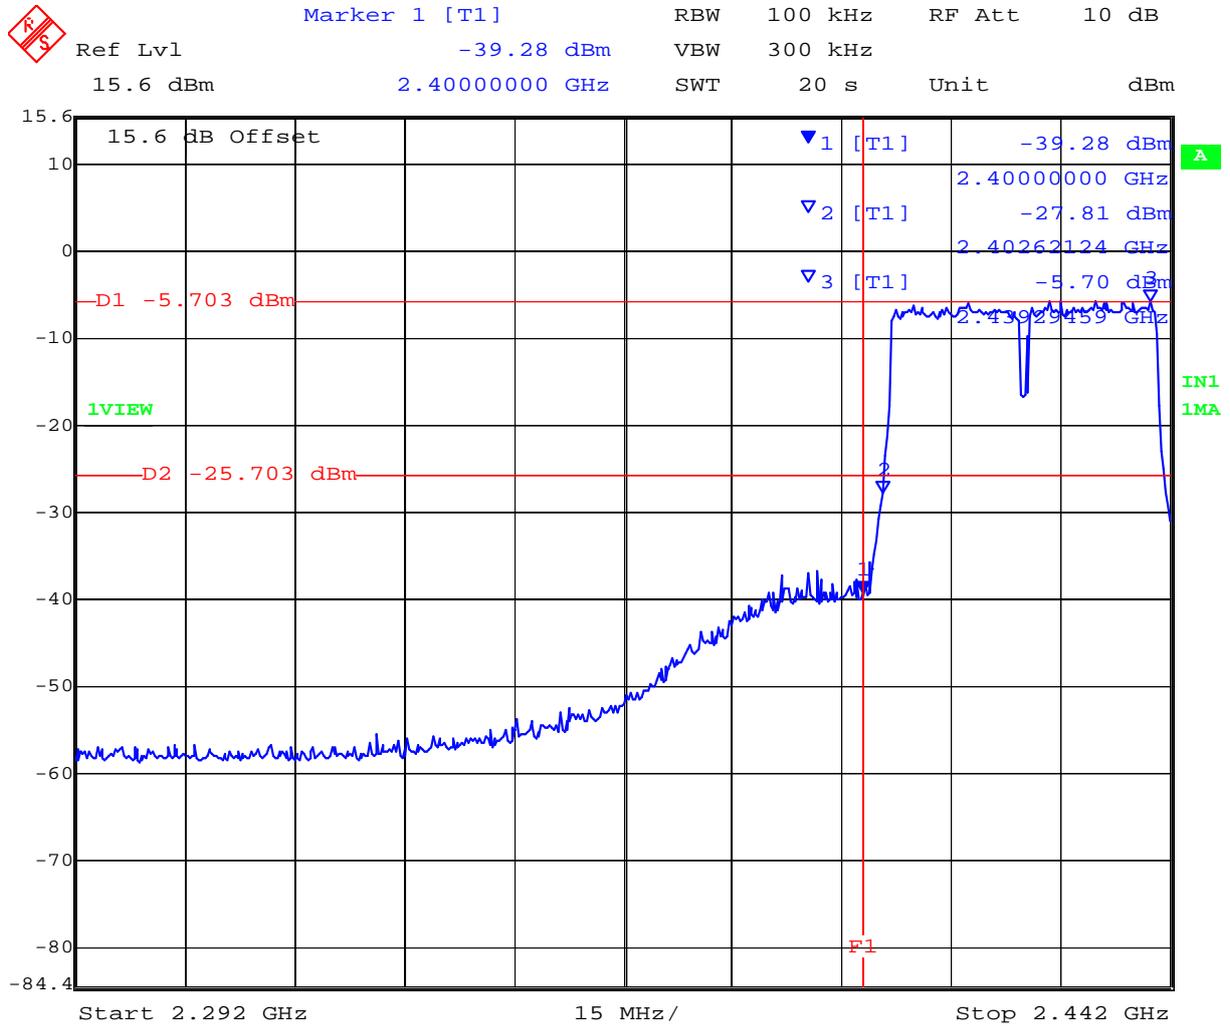

Date: 17.NOV.2011 16:12:58

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

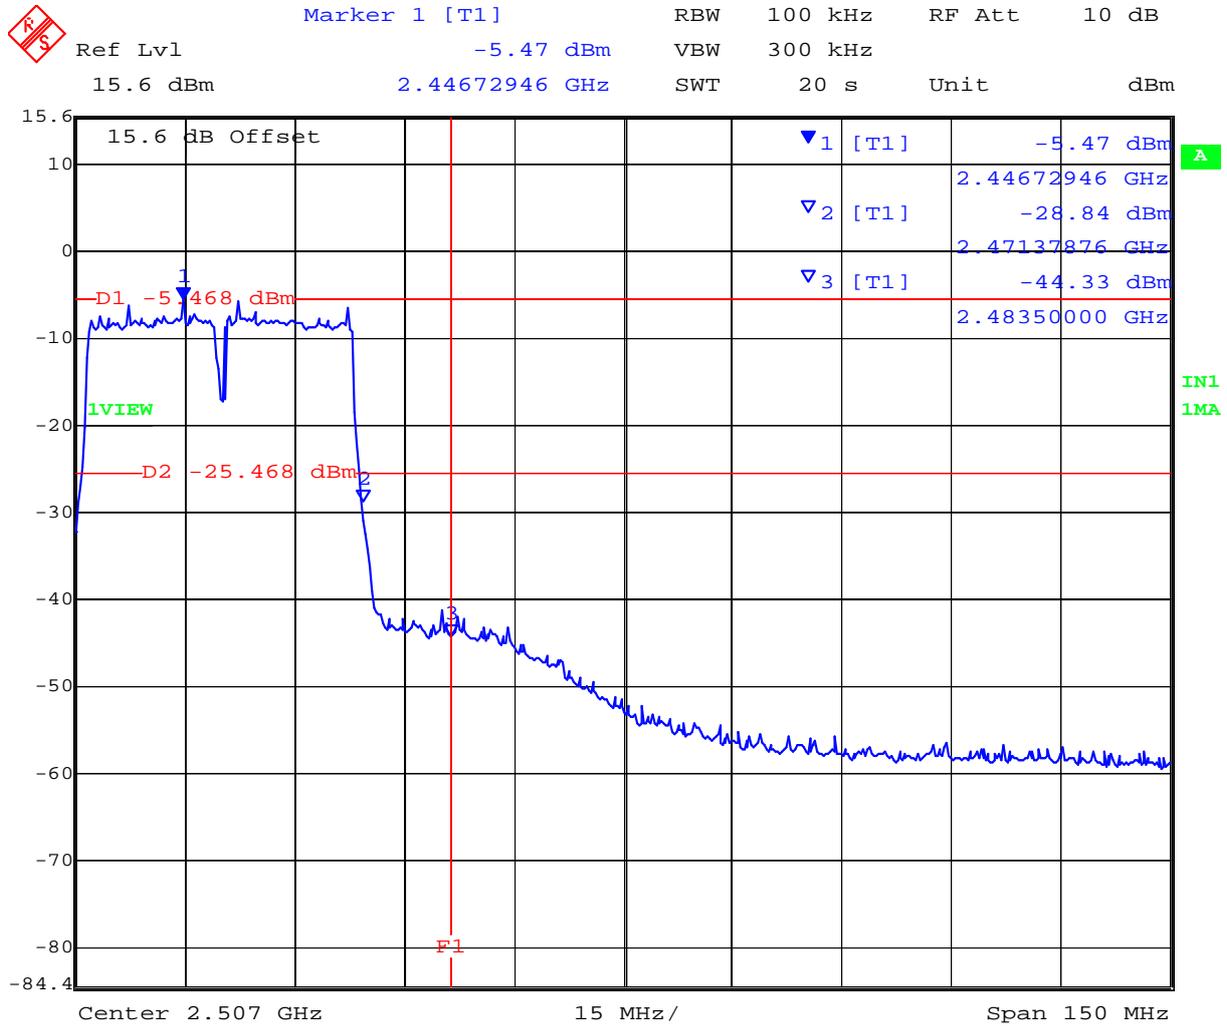

Date: 17.NOV.2011 16:35:07

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 89 of 134

---

## 7.6 Radiated Spurious Emissions

### Test Procedure

Testing was performed in a 3-meter anechoic chamber. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. Preliminary emissions were recorded with in Spectrum Analyzer mode, using a maximum peak detector while in peak hold mode.

Emissions nearest the limits were chosen for maximization and formal measurement using a CISPR Compliant receiver. Emissions above 1000 MHz are measured utilizing a CISPR compliant average detector with a tuned receiver, using a bandwidth of 1 MHz. Emissions from 30 MHz – 1000 MHz are measured utilizing a CISPR compliant quasi-peak detector with a tuned receiver, using a bandwidth of 120 kHz. Emissions above 1000 MHz are measured utilizing an average detector with a tuned receiver, using a bandwidth of 1000 MHz.


Only the highest emissions relative to the limit are listed.

To find out which was the worst case EUT position the EUT was placed horizontal and vertical on the test table top. Worst case was found to be vertical placement on the table top. The horizontal plot emissions are kept on file by the lab.

---


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Radiated Emission Measurement Setup – Above 1 GHz

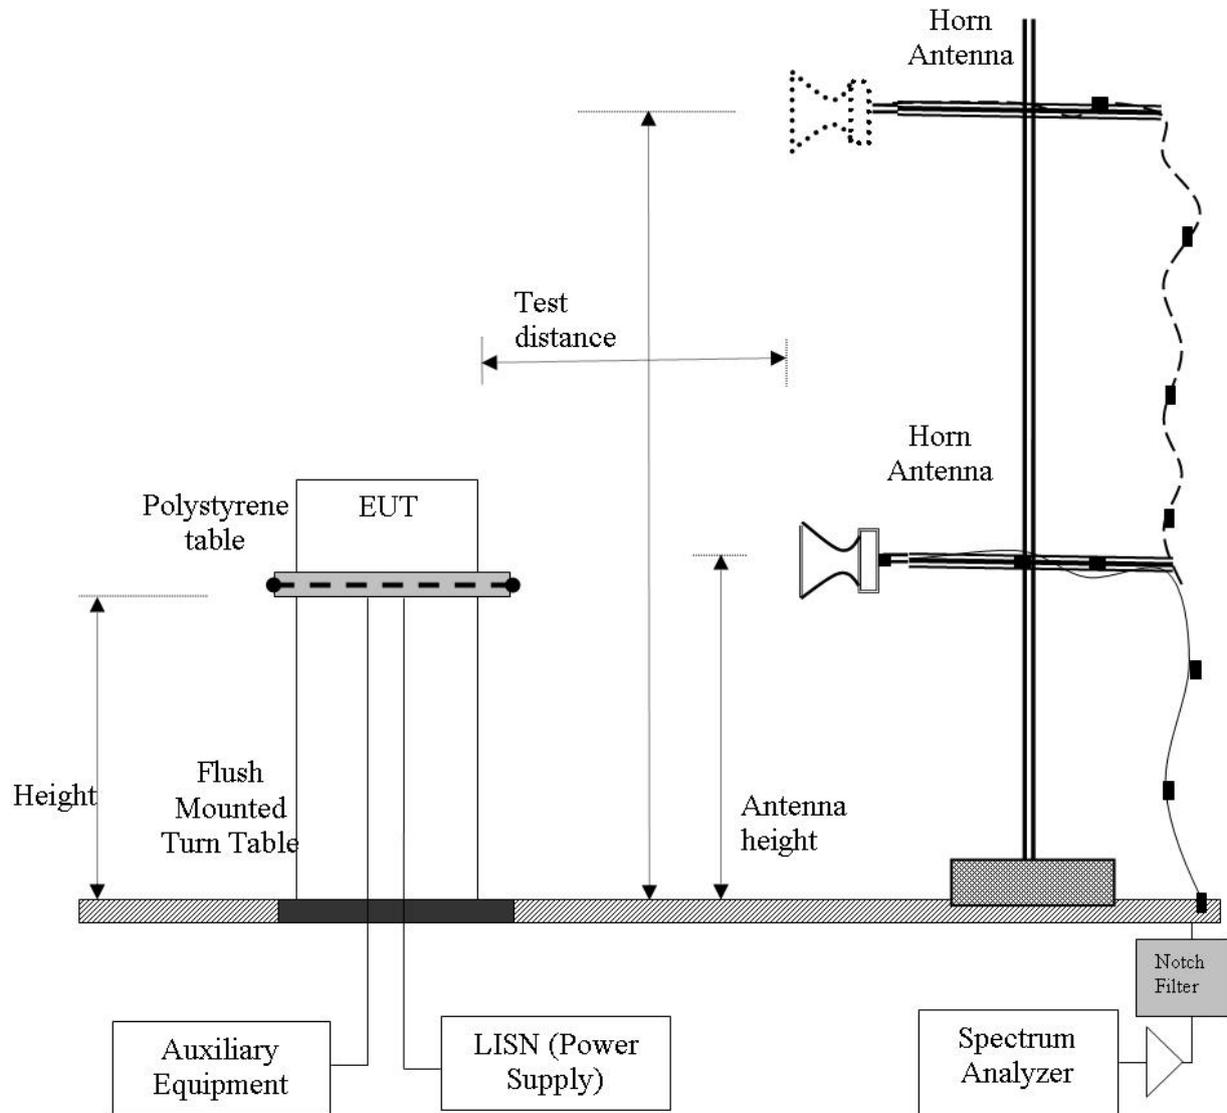

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Radiated Emission Measurement Setup – Below 1 GHz

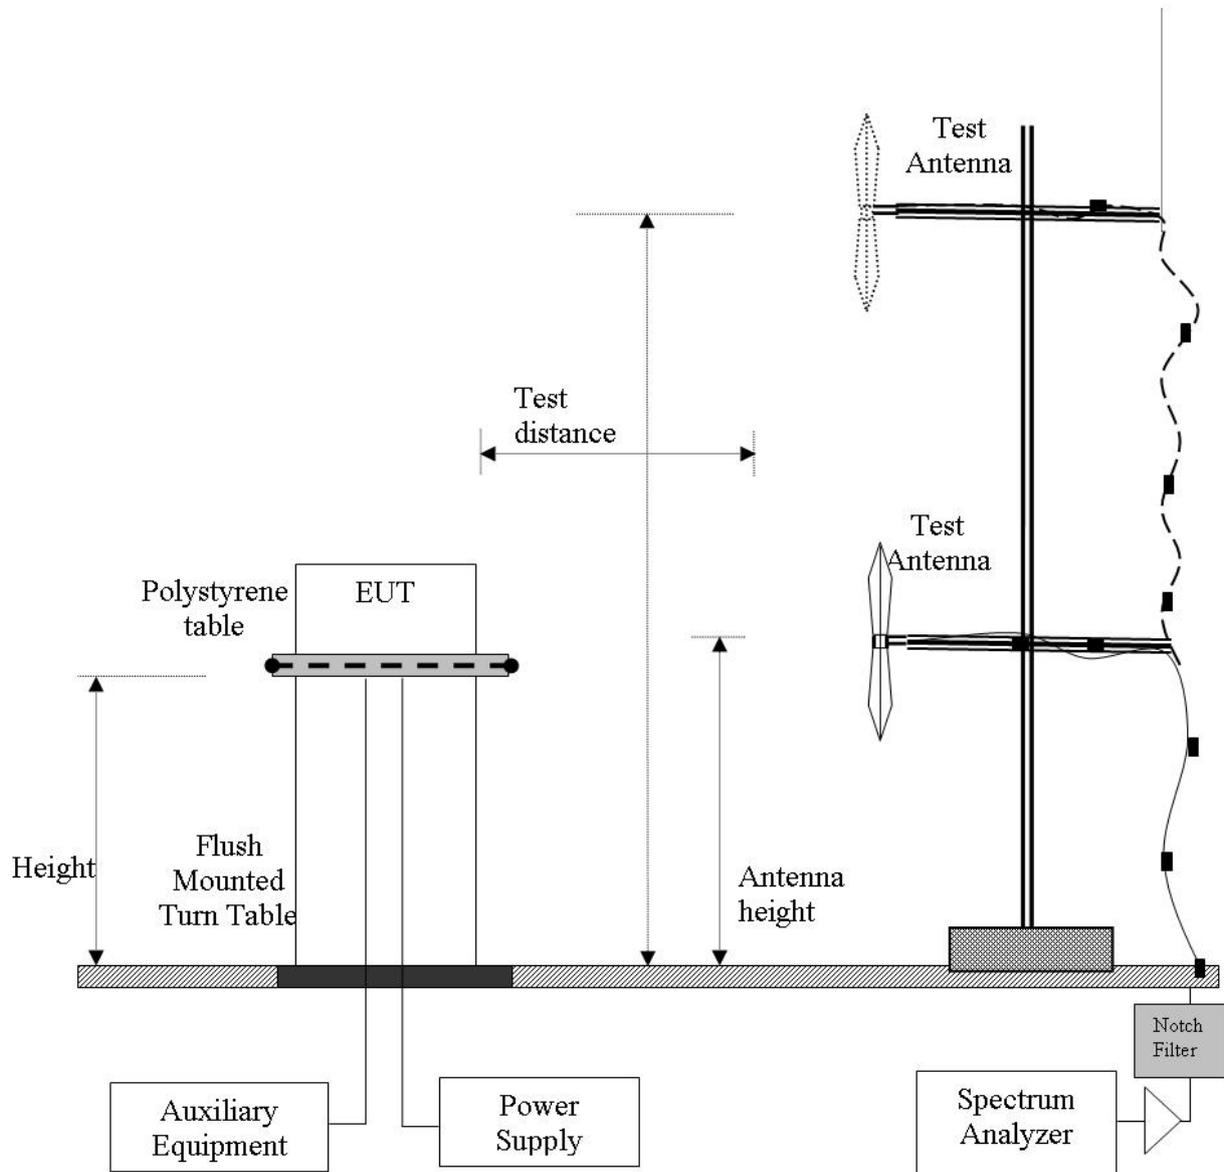

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 92 of 134

---

### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

$$CORR = \text{Correction Factor} = CL - AG + NFL$$

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

Field Strength Calculation Example:

Given receiver input reading of 51.5 dB $\mu$ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB $\mu$ V/m (or dB $\mu$ V) and  $\mu$ V/m (or  $\mu$ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu\text{V/m}))}$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## Specification for FCC Part 15 Radiated Spurious Emissions

**FCC §15.247(d)** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section §15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(a)).

**FCC §15.205 (a)** Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

**FCC §15.205 (a)** Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

**FCC §15.209 (a)** Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

**Table 1: FCC 15.209 Spurious Emissions Limits**

Frequency (MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 94 of 134

---

## Specification for Industry Canada RSS-210 Radiated Spurious Emissions

### **RSS-210 §2.1 RSS-Gen Compliance**

In addition to RSS-210, the requirements in RSS-Gen, General Requirements and Information for the Certification of Radio Apparatus, must be met.

### **RSS-210 §2.2 Emissions Falling Within Restricted Frequency Bands**

Category I license-exempt equipment is required to comply with the provisions in RSS-Gen with respect to emissions falling within restricted frequency bands. These restricted frequency bands are listed in RSS-Gen.

### **RSS-210 §2.3 Receivers**

Category I equipment receivers for use with transmitters subject to RSS-210 must comply with the applicable requirements set out in RSS-Gen and be certified under RSS-210. Category II equipment receivers for use with transmitters subject to RSS-210 are exempt from certification, but are subject to compliance with RSS-Gen and RSS-310.

### **RSS-210 §2.5 General Field Strength Limits**

RSS-Gen includes the general field strength limits of unwanted emissions, where applicable, for transmitters and receivers operating in accordance with the provisions specified in this standard.

Unwanted emissions of transmitters and receivers are permitted to fall within the restricted bands listed in RSS-Gen, and including the TV bands, but fundamental emissions are prohibited in the restricted bands.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## Specification for Industry Canada RSS-Gen Radiated Transmitter Spurious Emissions

### RSS-Gen §7.2.5 Transmitter Spurious Emissions Limits

Spurious emissions from license-exempt transmitters shall comply with the field strength limits shown below. Additionally, the level of any transmitter spurious emission shall not exceed the level of the transmitter's fundamental emission.

Table 1: RSS-Gen §7.2.5 Radiated Transmitter Spurious Emissions Limits

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Field Strength ( $\text{dB}\mu\text{V/m}$ )	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

## Specification for Industry Canada RSS-Gen Radiated Receiver Spurious Emissions

### RSS-Gen §6.1 Receiver Spurious Emissions Limits

Radiated spurious emission measurements shall be performed with the receiver antenna connected to the receiver antenna terminals.

Spurious emissions from receivers shall not exceed the radiated limits shown in the table below.

Table 1: RSS-Gen §6.1 Radiated Receiver Spurious Emissions Limits

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Field Strength ( $\text{dB}\mu\text{V/m}$ )	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 96 of 134

---

### Laboratory Measurement Uncertainty for Spectrum Measurement

<b>Measurement Uncertainty</b>	+5.6/ -4.5 dB
--------------------------------	---------------

### Traceability:

<b>Method</b>	<b>Test Equipment Used</b>
Work instruction WI-03	0287, 0193, 0342, 0158, 0303, 0304, 0134, 0310, 0312

---


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 7.6.1 Transmitter Radiated Spurious Emissions

All frequencies and modes were checked per 15.247 for radio emissions below 1GHz.

<b>Test Freq.</b>	2437 MHz	<b>Engineer</b>	SB
<b>Variant</b>	Digital Emissions	<b>Temp (°C)</b>	26.5
<b>Freq. Range</b>	30 MHz - 1000 MHz	<b>Rel. Hum.(%)</b>	32
<b>Power Setting</b>	18	<b>Press. (mBars)</b>	998
<b>Antenna</b>	Main Ant		
<b>Test Notes 1</b>	EUT w/ DC power		
<b>Test Notes 2</b>			

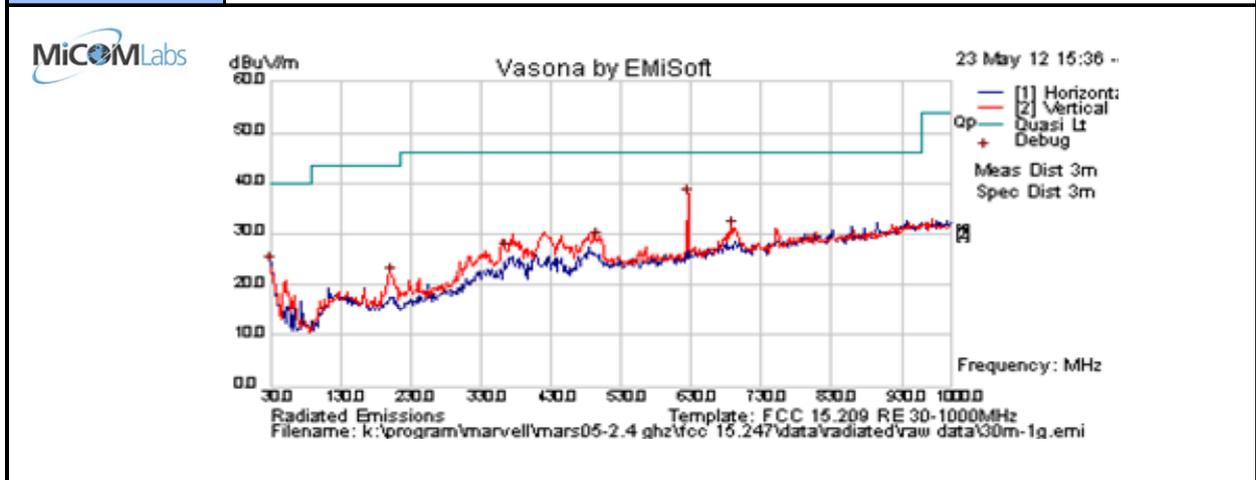

#### Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
30.508	30.7	3.5	-10.2	24.0	Peak [Scan]	H	98	-2	40	-16.0	Pass	
366.105	36.6	5.3	-15.4	26.6	Peak [Scan]	V	98	-2	46	-19.4	Pass	
203.145	36.1	4.7	-19.1	21.7	Peak [Scan]	V	98	-2	43.5	-21.8	Pass	
624.978	41.8	6.3	-11.0	37.1	Peak [Scan]	V	98	-2	46	-8.9	Pass	
689.600	34.7	6.5	-10.4	30.9	Peak [Scan]	V	98	-2	46	-15.2	Pass	
496.085	35.8	5.8	-12.9	28.7	Peak [Scan]	V	98	-2	46	-17.3	Pass	

Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency  
 NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band

The above plot implements a peak detector showing both polarities.



<b>Test Freq.</b>	2412 MHz	<b>Engineer</b>	SB
<b>Variant</b>	802.11b; 1 Mbs	<b>Temp (°C)</b>	24
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	33
<b>Power Setting</b>	18	<b>Press. (mBars)</b>	998
<b>Antenna</b>	Main Ant	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>	EUT Vertical Position		
<b>Test Notes 2</b>			

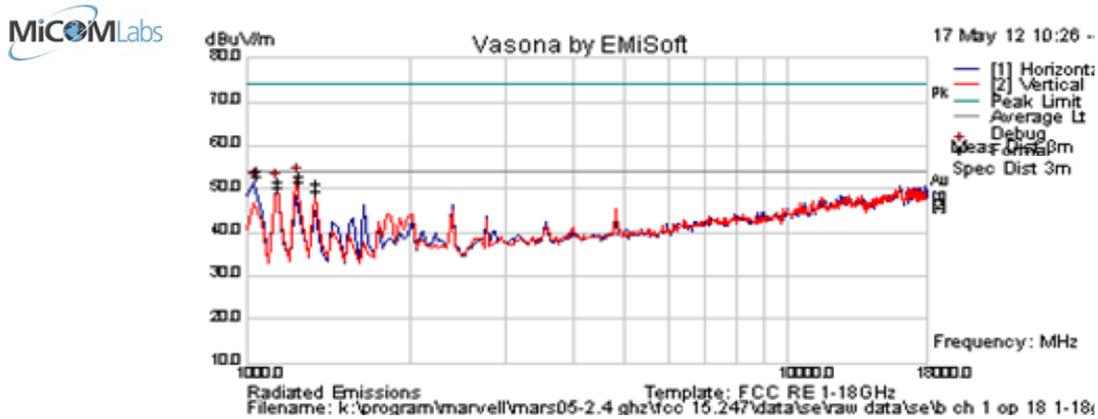


**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
1149.860	65.2	2.1	-15.6	51.7	Peak Max	H	144	303	74.0	-22.3	Pass	
1050.06	67.9	2.0	-15.8	54.1	Peak Max	H	99	299	74.0	-19.9	Pass	
1350.020	63.0	2.3	-14.0	51.3	Peak Max	V	136	28	74	-22.7	Pass	
1249.980	64.8	2.2	-14.2	52.8	Peak Max	V	98	306	74	-21.2	Pass	
1149.860	63.8	2.1	-15.6	50.3	Average Max	H	144	303	54	-3.7	Pass	
1050.060	66.8	2.0	-15.8	53.0	Average Max	H	99	299	54	-1.0	Pass	
1350.020	61.1	2.3	-14.0	49.4	Average Max	V	136	28	54	-4.6	Pass	
1249.980	63.5	2.2	-14.2	51.5	Average Max	V	98	306	54	-2.5	Pass	
1646.397	58.1	2.5	-14.7	45.8	Peak [Scan]	H	98	306	54	-8.2	Pass	
4804.110	47.0	4.5	-9.7	41.7	Peak [Scan]	H	98	306	54	-12.3	Pass	

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission  
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak



<b>Test Freq.</b>	2437 MHz	<b>Engineer</b>	SB
<b>Variant</b>	802.11b; 1 Mbs	<b>Temp (°C)</b>	24
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	33
<b>Power Setting</b>	18	<b>Press. (mBars)</b>	998
<b>Antenna</b>	Main Ant	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>	EUT Vertical Position		
<b>Test Notes 2</b>			

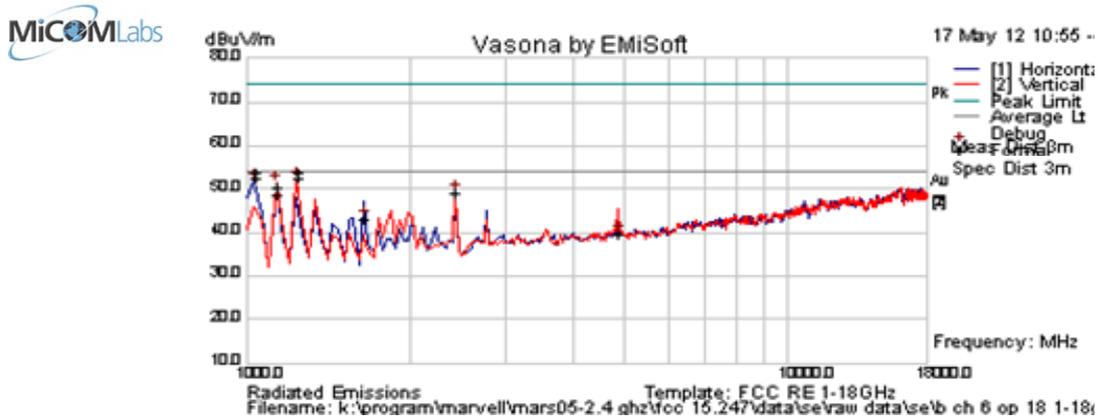

**Formally measured emission peaks**


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
1250.060	65.9	2.2	-14.2	53.9	Peak Max	V	98	105	74.0	-20.1	Pass	
1049.98	67.4	2.0	-15.8	53.6	Peak Max	H	99	310	74.0	-20.4	Pass	
1150.180	63.6	2.1	-15.6	50.2	Peak Max	V	98	113	74	-23.8	Pass	
1250.060	64.6	2.2	-14.2	52.6	Average Max	V	98	105	54	-1.4	Pass	
1049.980	66.4	2.0	-15.8	52.5	Average Max	H	99	310	54	-1.5	Pass	
1150.180	62.0	2.1	-15.6	48.5	Average Max	V	98	113	54	-5.5	Pass	
2430.862	57.5	3.0	-11.6	48.9	Peak [Scan]	V						FUND
4888.151	44.9	4.5	-9.7	39.7	Peak [Scan]	V	98	113	54	-14.3	Pass	
1660.735	55.2	2.5	-14.5	43.2	Peak [Scan]	H	98	113	54	-10.9	Pass	
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 100 of 134

<b>Test Freq.</b>	2462 MHz	<b>Engineer</b>	SB
<b>Variant</b>	802.11b; 1 Mbs	<b>Temp (°C)</b>	24
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	33
<b>Power Setting</b>	18	<b>Press. (mBars)</b>	998
<b>Antenna</b>	Main Ant	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>	EUT Vertical Position		
<b>Test Notes 2</b>			

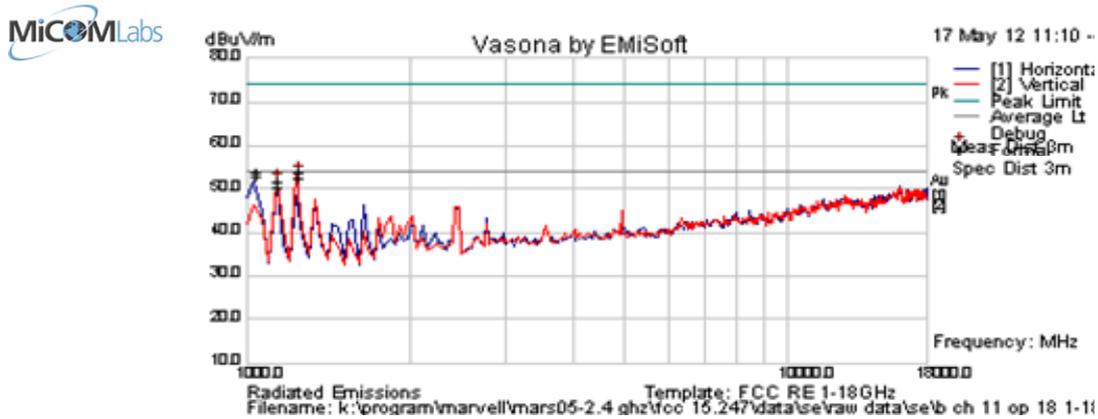

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
1249.970	65.8	2.2	-14.2	53.7	Peak Max	V	98	106	74.0	-20.3	Pass	
1049.905	67.7	2.0	-15.8	53.8	Peak Max	H	98	308	74.0	-20.2	Pass	
1149.962	65.0	2.1	-15.6	51.6	Peak Max	V	99	119	74	-22.4	Pass	
1249.970	64.5	2.2	-14.2	52.4	Average Max	V	98	106	54	-1.6	Pass	
1049.905	66.6	2.0	-15.8	52.8	Average Max	H	98	308	54	-1.2	Pass	
1149.962	63.8	2.1	-15.6	50.3	Average Max	V	99	119	54	-3.7	Pass	
1676.397	58.1	2.5	-14.7	45.8	Peak [Scan]	H	98	306	54	-8.2	Pass	
4811.110	47.0	4.5	-9.7	41.7	Peak [Scan]	H	98	306	54	-12.3	Pass	


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission  
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 101 of 134

<b>Test Freq.</b>	2412 MHz	<b>Engineer</b>	SB
<b>Variant</b>	802.11g; 6 Mbs	<b>Temp (°C)</b>	24
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	33
<b>Power Setting</b>	18	<b>Press. (mBars)</b>	998
<b>Antenna</b>	Main Ant	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>	EUT Vertical Position		
<b>Test Notes 2</b>			

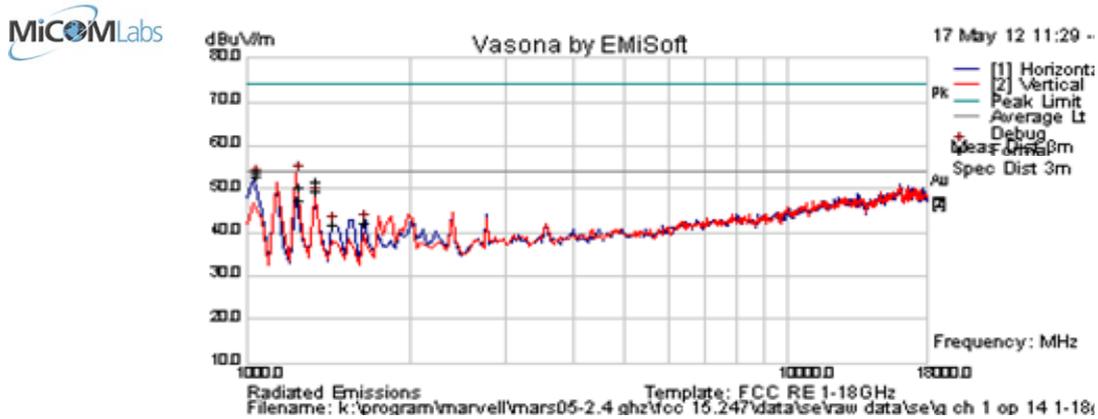

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
1249.965	62.2	2.2	-14.2	50.2	Peak Max	V	98	189	74.0	-23.8	Pass	
1050.023	67.8	2.0	-15.8	54.0	Peak Max	H	99	300	74.0	-20.1	Pass	
1350.013	63.1	2.3	-14.0	51.4	Peak Max	V	93	312	74	-22.6	Pass	
1249.965	59.4	2.2	-14.2	47.4	Average Max	V	98	189	54	-6.6	Pass	
1050.023	66.8	2.0	-15.8	52.9	Average Max	H	99	300	54	-1.1	Pass	
1350.013	61.3	2.3	-14.0	49.6	Average Max	V	93	312	54	-4.4	Pass	
1660.735	54.1	2.5	-14.5	42.1	Peak [Scan]	H	93	312	54	-11.9	Pass	
1449.781	54.2	2.3	-14.7	41.8	Peak [Scan]	H	93	312	54	-12.2	Pass	


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission  
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 102 of 134

<b>Test Freq.</b>	2437 MHz	<b>Engineer</b>	SB
<b>Variant</b>	802.11g; 6 Mbs	<b>Temp (°C)</b>	24
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	33
<b>Power Setting</b>	18	<b>Press. (mBars)</b>	998
<b>Antenna</b>	Main Ant	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>	EUT Vertical Position		
<b>Test Notes 2</b>			

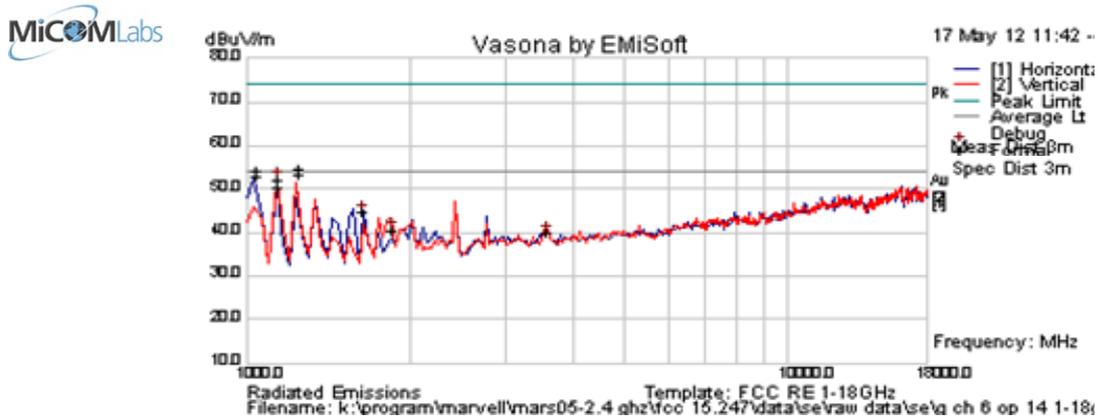

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
1050.060	68.0	2.0	-15.8	54.2	Peak Max	H	100	303	74.0	-19.8	Pass	
1149.975	65.4	2.1	-15.6	52.0	Peak Max	V	98	109	74.0	-22.0	Pass	
1249.900	66.5	2.2	-14.2	54.5	Peak Max	V	98	111	74	-19.5	Pass	
1050.060	66.7	2.0	-15.8	52.9	Average Max	H	100	303	54	-1.1	Pass	
1149.975	63.9	2.1	-15.6	50.5	Average Max	V	98	109	54	-3.5	Pass	
1249.900	65.3	2.2	-14.2	53.2	Average Max	V	98	111	54	-0.8	Pass	
1646.397	56.8	2.5	-14.7	44.6	Peak [Scan]	H	98	111	54	-9.5	Pass	
1866.977	50.0	2.7	-12.3	40.4	Peak [Scan]	V	98	111	54	-13.6	Pass	
3603.407	47.7	3.7	-11.5	39.9	Peak [Scan]	V	98	111	54	-14.1	Pass	


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission  
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 103 of 134

<b>Test Freq.</b>	2462 MHz	<b>Engineer</b>	SB
<b>Variant</b>	802.11g; 6 Mbs	<b>Temp (°C)</b>	24
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	33
<b>Power Setting</b>	18	<b>Press. (mBars)</b>	998
<b>Antenna</b>	Main Ant	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>	EUT Vertical Position		
<b>Test Notes 2</b>			

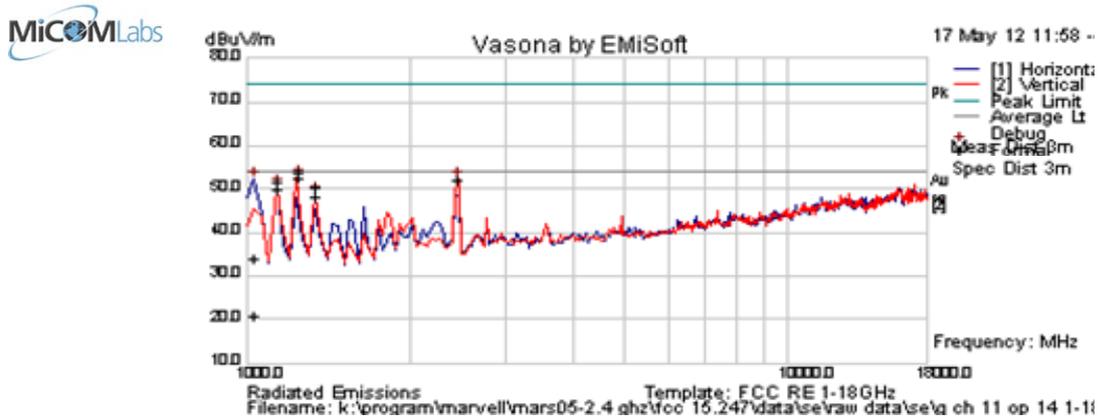

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
1249.980	65.6	2.2	-14.2	53.6	Peak Max	V	98	107	74.0	-20.4	Pass	
1034.068136	47.6	2.0	-15.8	33.8	Peak Max	H	129	81	74.0	-40.2	Pass	
1149.785	64.9	2.1	-15.6	51.4	Peak Max	H	140	304	74	-22.6	Pass	
1349.922	62.0	2.3	-14.0	50.3	Peak Max	V	98	308	74	-23.7	Pass	
1249.980	64.4	2.2	-14.2	52.4	Average Max	V	98	107	54	-1.6	Pass	
1034.068	34.6	2.0	-15.8	20.8	Average Max	H	129	81	54	-33.2	Pass	
1149.785	63.3	2.1	-15.6	49.8	Average Max	H	140	304	54	-4.2	Pass	
1349.922	59.9	2.3	-14.0	48.2	Average Max	V	98	308	54	-5.8	Pass	
2464.930	60.6	3.0	-11.5	52.1	Peak [Scan]	V	100					FUND


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission  
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 104 of 134

<b>Test Freq.</b>	2412 MHz	<b>Engineer</b>	SB
<b>Variant</b>	802.11n; HT-20; 6.5 MCS	<b>Temp (°C)</b>	24
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	33
<b>Power Setting</b>	13	<b>Press. (mBars)</b>	998
<b>Antenna</b>	Main Ant	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>	EUT Vertical Position		
<b>Test Notes 2</b>			

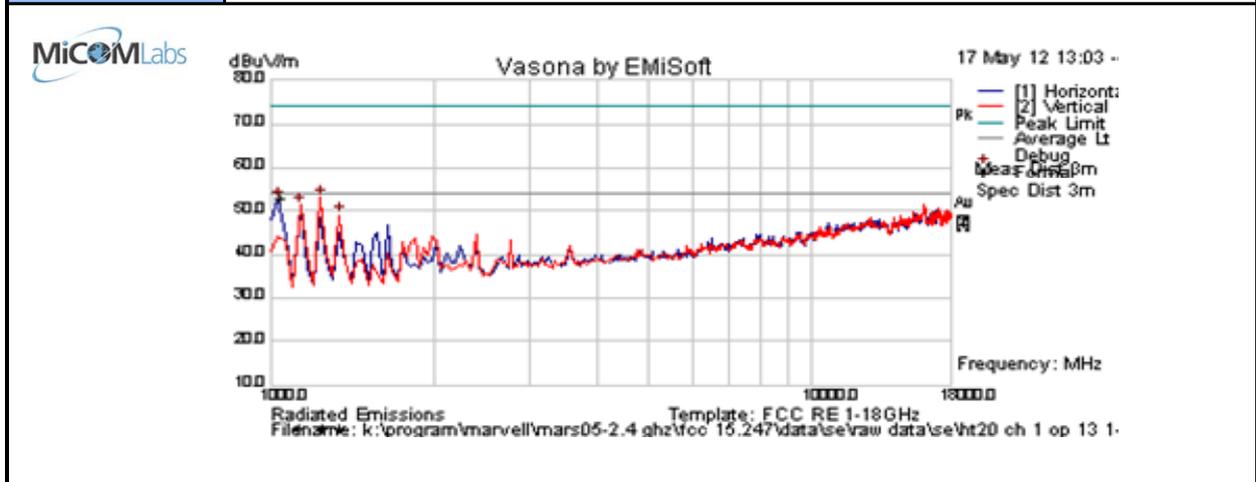

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
1049.880	67.9	2.0	-15.8	54.1	Peak Max	H	98	301	74.0	-19.9	Pass	
1249.985	65.5	2.2	-14.2	53.5	Peak Max	V	98	105	74.0	-20.5	Pass	
1136.773	47.4	2.1	-15.6	33.9	Peak Max	V	116	124	74	-40.1	Pass	
1349.770	62.3	2.3	-14.0	50.6	Peak Max	V	98	308	74	-23.4	Pass	
1049.880	67.0	2.0	-15.8	53.2	Average Max	H	98	301	54	-0.8	Pass	
1249.985	64.2	2.2	-14.2	52.2	Average Max	V	98	105	54	-1.8	Pass	
1136.773	34.6	2.1	-15.6	21.1	Average Max	V	116	124	54	-32.9	Pass	
1349.770	60.5	2.3	-14.0	48.8	Average Max	V	98	308	54	-5.3	Pass	


<b>Legend:</b>	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 105 of 134

<b>Test Freq.</b>	2437 MHz	<b>Engineer</b>	SB
<b>Variant</b>	802.11n; HT-20; 6.5 MCS	<b>Temp (°C)</b>	24
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	33
<b>Power Setting</b>	13	<b>Press. (mBars)</b>	998
<b>Antenna</b>	Main Ant	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>	EUT Vertical Position		
<b>Test Notes 2</b>			

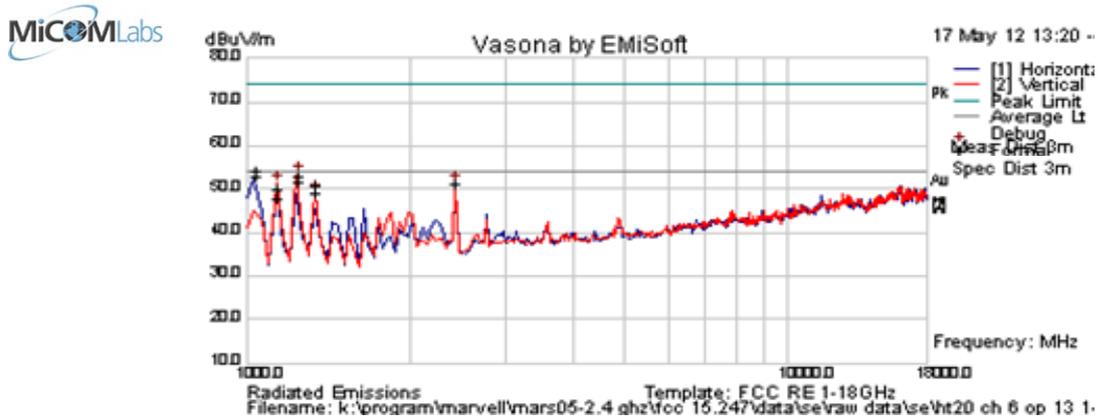

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
1249.980	65.1	2.2	-14.2	53.1	Peak Max	V	98	99	74.0	-20.9	Pass	
1049.93	67.9	2.0	-15.8	54.1	Peak Max	H	98	298	74.0	-19.9	Pass	
1149.780	63.2	2.1	-15.6	49.8	Peak Max	V	98	112	74	-24.2	Pass	
1349.900	62.6	2.3	-14.0	50.9	Peak Max	V	98	308	74	-23.1	Pass	
1249.980	63.7	2.2	-14.2	51.7	Average Max	V	98	99	54	-2.3	Pass	
1049.930	66.9	2.0	-15.8	53.1	Average Max	H	98	298	54	-0.9	Pass	
1149.780	61.4	2.1	-15.6	48.0	Average Max	V	98	112	54	-6.0	Pass	
1349.900	60.7	2.3	-14.0	49.0	Average Max	V	98	308	54	-5.0	Pass	
2430.862	59.9	3.0	-11.6	51.3	Peak [Scan]	V						FUND


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission  
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 106 of 134

<b>Test Freq.</b>	2462 MHz	<b>Engineer</b>	SB
<b>Variant</b>	802.11n; HT-20; 6.5 MCS	<b>Temp (°C)</b>	24
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	33
<b>Power Setting</b>	13	<b>Press. (mBars)</b>	998
<b>Antenna</b>	Main Ant	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>	EUT Vertical Position		
<b>Test Notes 2</b>			

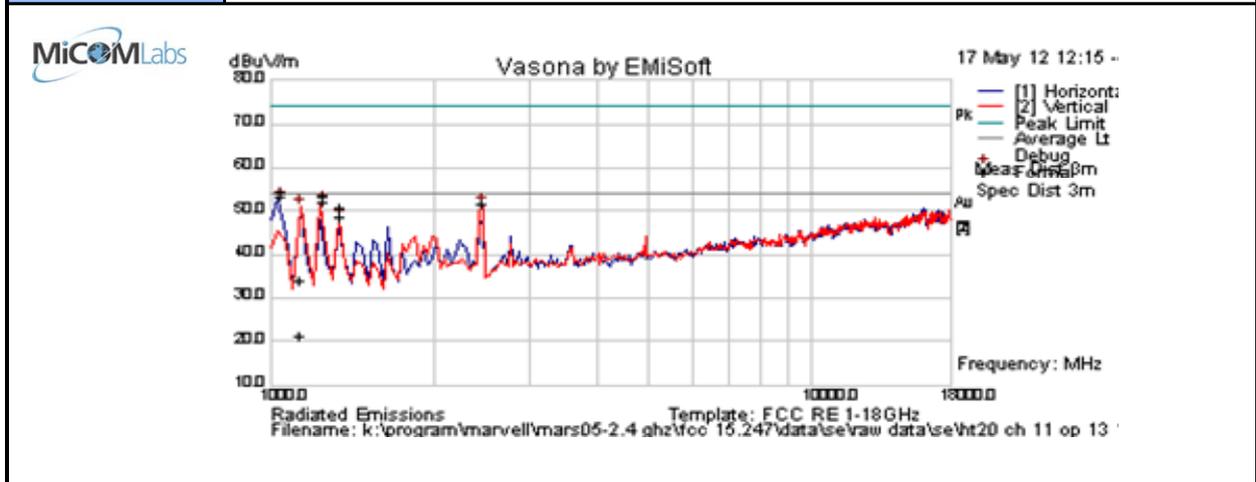

**Formally measured emission peaks**


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
1049.980	67.9	2.0	-15.8	54.1	Peak Max	H	98	301	74.0	-19.9	Pass	
1249.905	65.5	2.2	-14.2	53.5	Peak Max	V	98	105	74.0	-20.5	Pass	
1136.273	47.4	2.1	-15.6	33.9	Peak Max	V	116	124	74	-40.1	Pass	
1349.975	62.3	2.3	-14.0	50.6	Peak Max	V	98	308	74	-23.4	Pass	
1049.980	67.0	2.0	-15.8	53.2	Average Max	H	98	301	54	-0.8	Pass	
1249.905	64.2	2.2	-14.2	52.2	Average Max	V	98	105	54	-1.8	Pass	
1136.273	34.6	2.1	-15.6	21.1	Average Max	V	116	124	54	-32.9	Pass	
1349.975	60.5	2.3	-14.0	48.8	Average Max	V	98	308	54	-5.3	Pass	
2464.930	59.9	3.0	-11.5	51.4	Peak [Scan]	V	100					FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 107 of 134

<b>Test Freq.</b>	2422 MHz	<b>Engineer</b>	SB
<b>Variant</b>	802.11n; HT-40; 13.5 MCS	<b>Temp (°C)</b>	24
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	33
<b>Power Setting</b>	10	<b>Press. (mBars)</b>	998
<b>Antenna</b>	Main Ant	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>	EUT Vertical Position		
<b>Test Notes 2</b>			

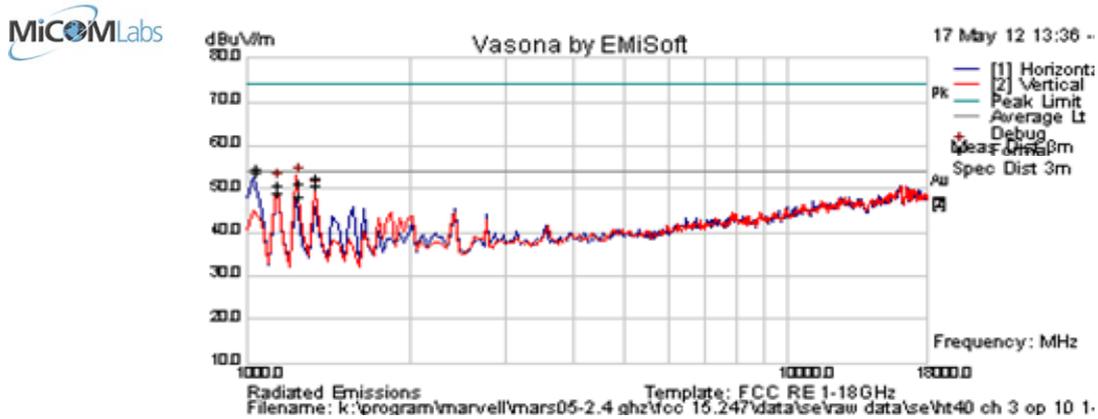

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
1250.301	63.3	2.2	-14.2	51.3	Peak Max	V	98	101	74.0	-22.7	Pass	
1049.89	68.6	2.0	-15.8	54.7	Peak Max	H	98	302	74.0	-19.3	Pass	
1149.820	64.3	2.1	-15.6	50.8	Peak Max	V	98	118	74	-23.2	Pass	
1350.020	64.1	2.3	-14.0	52.4	Peak Max	V	98	309	74	-21.7	Pass	
1250.301	60.3	2.2	-14.2	48.2	Average Max	V	98	101	54	-5.8	Pass	
1049.890	67.5	2.0	-15.8	53.7	Average Max	H	98	302	54	-0.3	Pass	
1149.820	62.6	2.1	-15.6	49.2	Average Max	V	98	118	54	-4.8	Pass	
1350.020	62.4	2.3	-14.0	50.7	Average Max	V	98	309	54	-3.3	Pass	


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission  
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 108 of 134

<b>Test Freq.</b>	2437 MHz	<b>Engineer</b>	SB
<b>Variant</b>	802.11n; HT-40; 13.5 MCS	<b>Temp (°C)</b>	24
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	33
<b>Power Setting</b>	10	<b>Press. (mBars)</b>	998
<b>Antenna</b>	Main Ant	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>	EUT Vertical Position		
<b>Test Notes 2</b>			

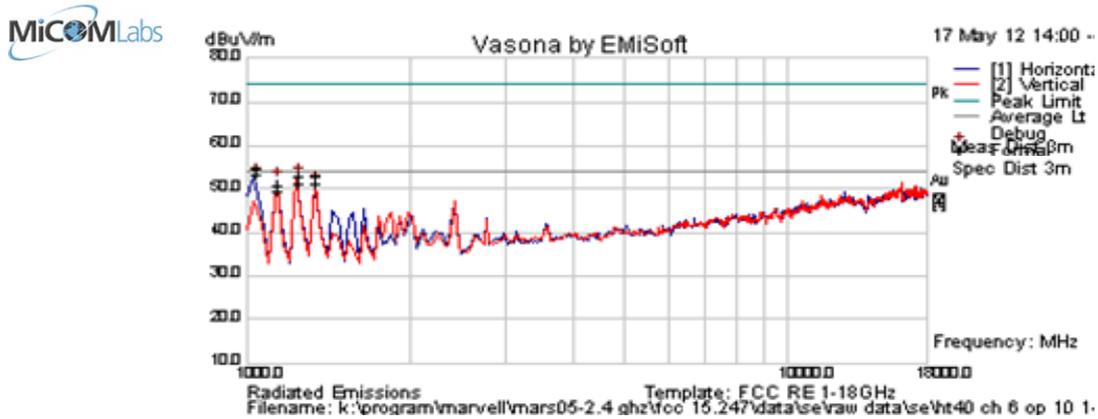

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
1049.875	68.3	2.0	-15.8	54.5	Peak Max	H	99	292	74.0	-19.5	Pass	
1249.787	65.0	2.2	-14.2	52.9	Peak Max	H	139	299	74.0	-21.1	Pass	
1149.957	64.4	2.1	-15.6	50.9	Peak Max	H	148	304	74	-23.1	Pass	
1349.922	64.4	2.3	-14.0	52.7	Peak Max	V	99	311	74	-21.3	Pass	
1049.875	67.1	2.0	-15.8	53.3	Average Max	H	99	292	54	-0.7	Pass	
1249.787	63.4	2.2	-14.2	51.4	Average Max	H	139	299	54	-2.6	Pass	
1149.957	63.0	2.1	-15.6	49.6	Average Max	H	148	304	54	-4.5	Pass	
1349.922	62.8	2.3	-14.0	51.1	Average Max	V	99	311	54	-2.9	Pass	


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission  
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 109 of 134

<b>Test Freq.</b>	2452 MHz	<b>Engineer</b>	SB
<b>Variant</b>	802.11n; HT-40; 13.5 MCS	<b>Temp (°C)</b>	24
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	33
<b>Power Setting</b>	10	<b>Press. (mBars)</b>	998
<b>Antenna</b>	Main Ant	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>	EUT Vertical Position		
<b>Test Notes 2</b>			

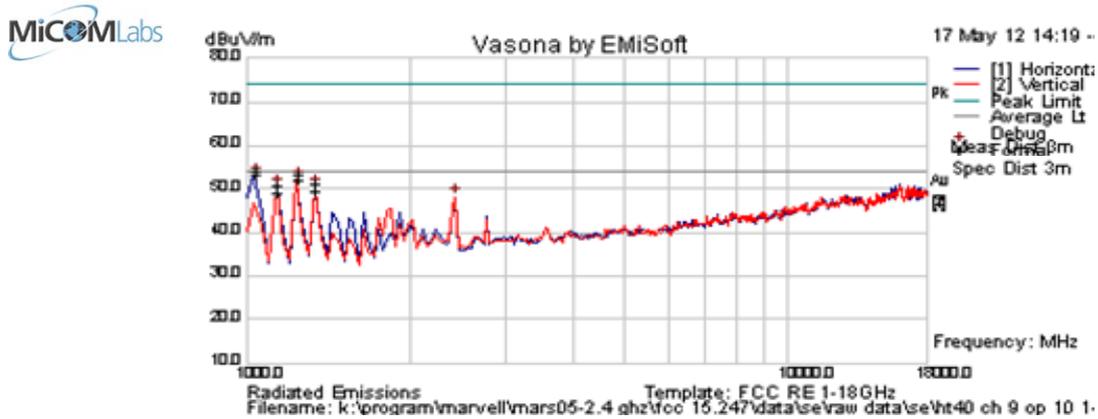

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
1049.912	68.0	2.0	-15.8	54.2	Peak Max	H	98	296	74.0	-19.8	Pass	
1250.06	65.4	2.2	-14.2	53.3	Peak Max	H	139	300	74.0	-20.7	Pass	
1150.100	64.1	2.1	-15.6	50.7	Peak Max	H	144	302	74	-23.3	Pass	
1350.045	62.7	2.3	-14.0	51.0	Peak Max	V	98	311	74	-23.0	Pass	
1049.912	67.0	2.0	-15.8	53.2	Average Max	H	98	296	54	-0.8	Pass	
1250.060	64.0	2.2	-14.2	51.9	Average Max	H	139	300	54	-2.1	Pass	
1150.100	62.4	2.1	-15.6	48.9	Average Max	H	144	302	54	-5.1	Pass	
1350.045	61.0	2.3	-14.0	49.3	Average Max	V	98	311	54	-4.7	Pass	


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission  
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 7.6.2 Band-Edge Measurements

Band-Edge 2412MHz; 802.11b 2310-2390 MHz

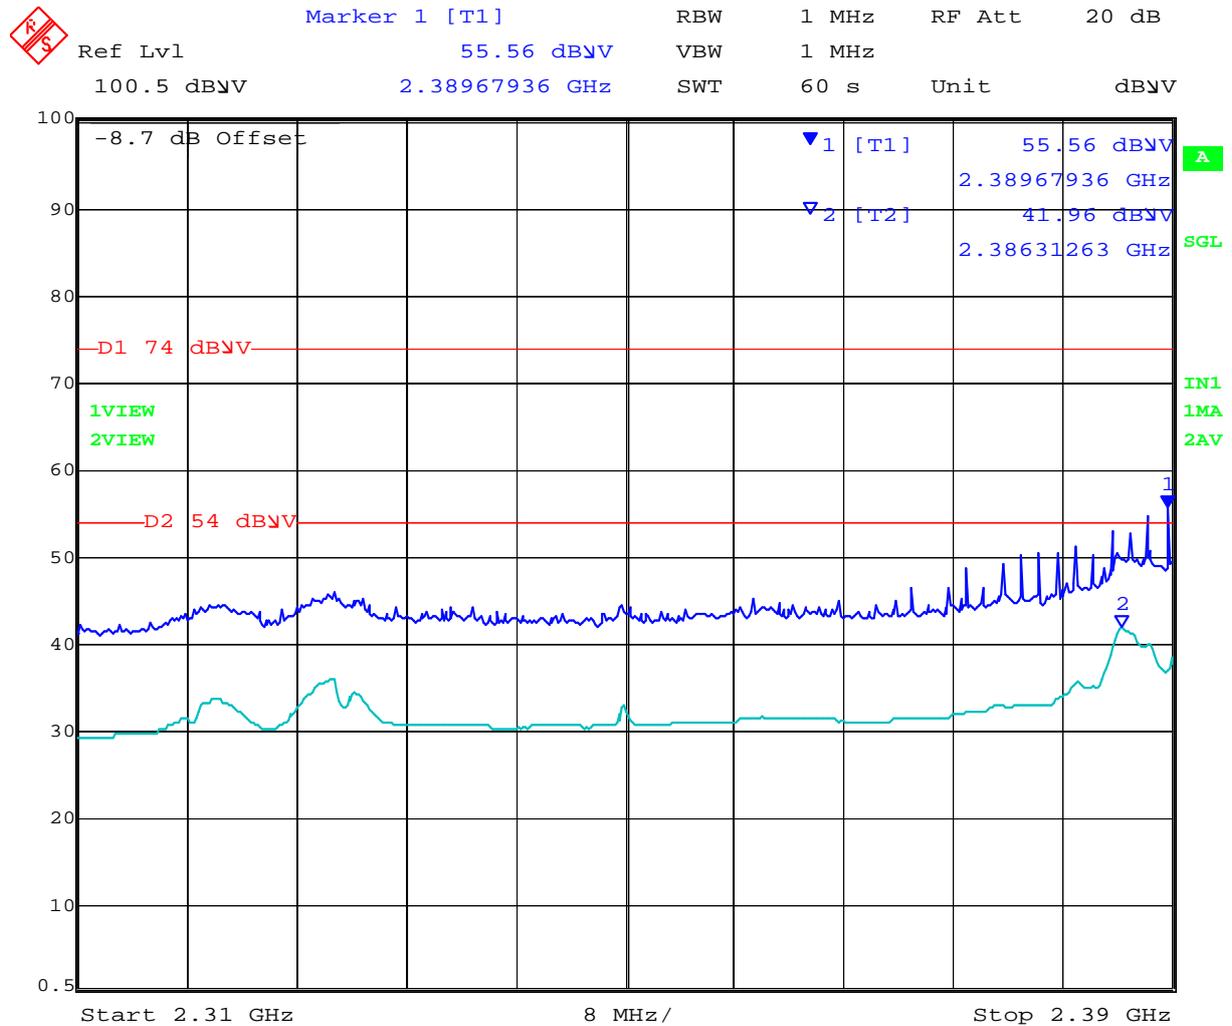


Date: 14.MAY.2012 04:04:54

Pwr = 18

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Band-Edge 2462MHz; 802.11b 2483.5 - 2500 MHz

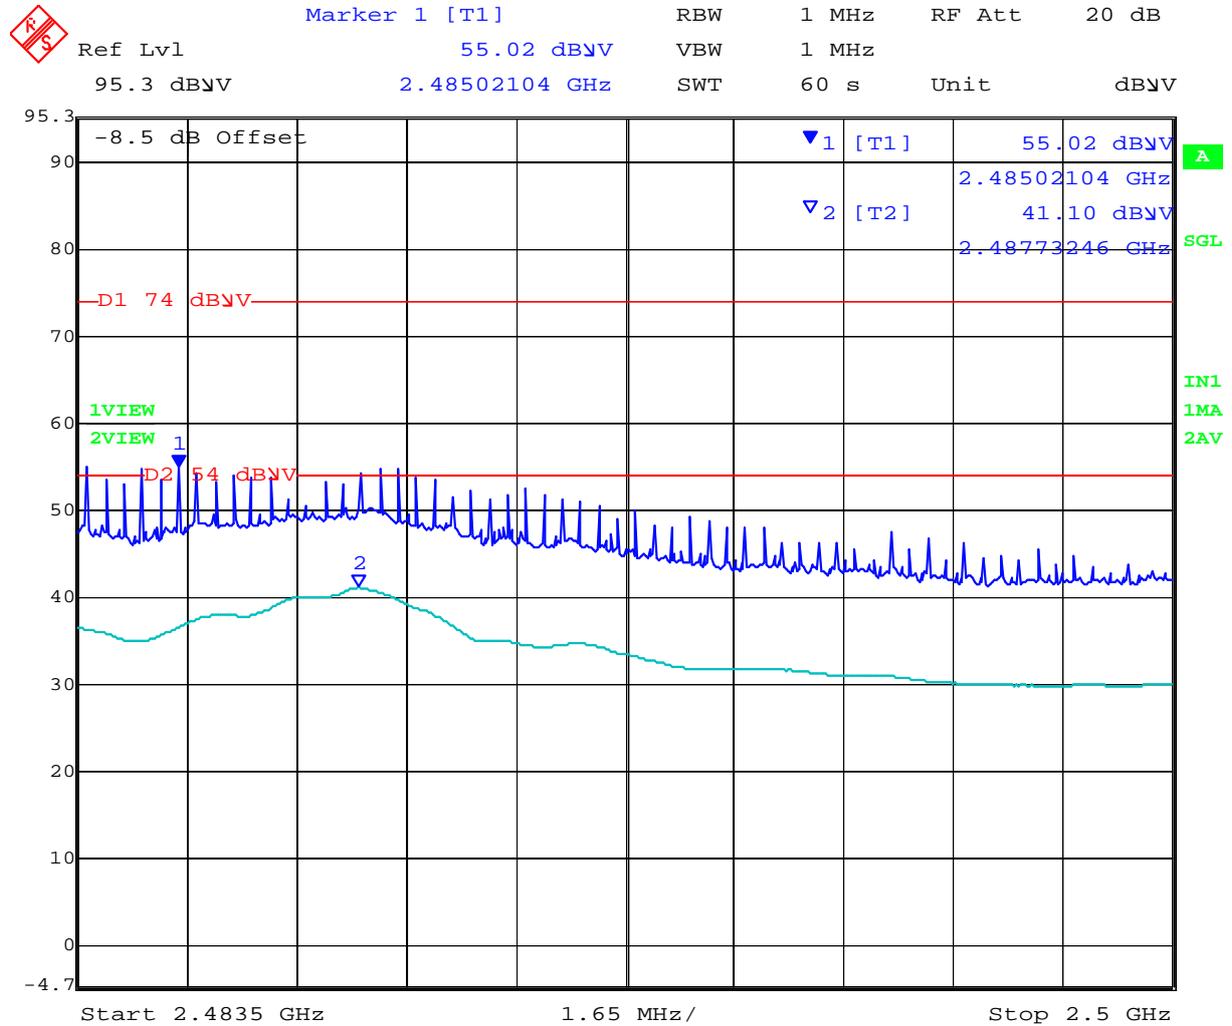


Date: 14.MAY.2012 04:44:00

Pwr = 18

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Band-Edge 2412MHz; 802.11g 2310-2390 MHz

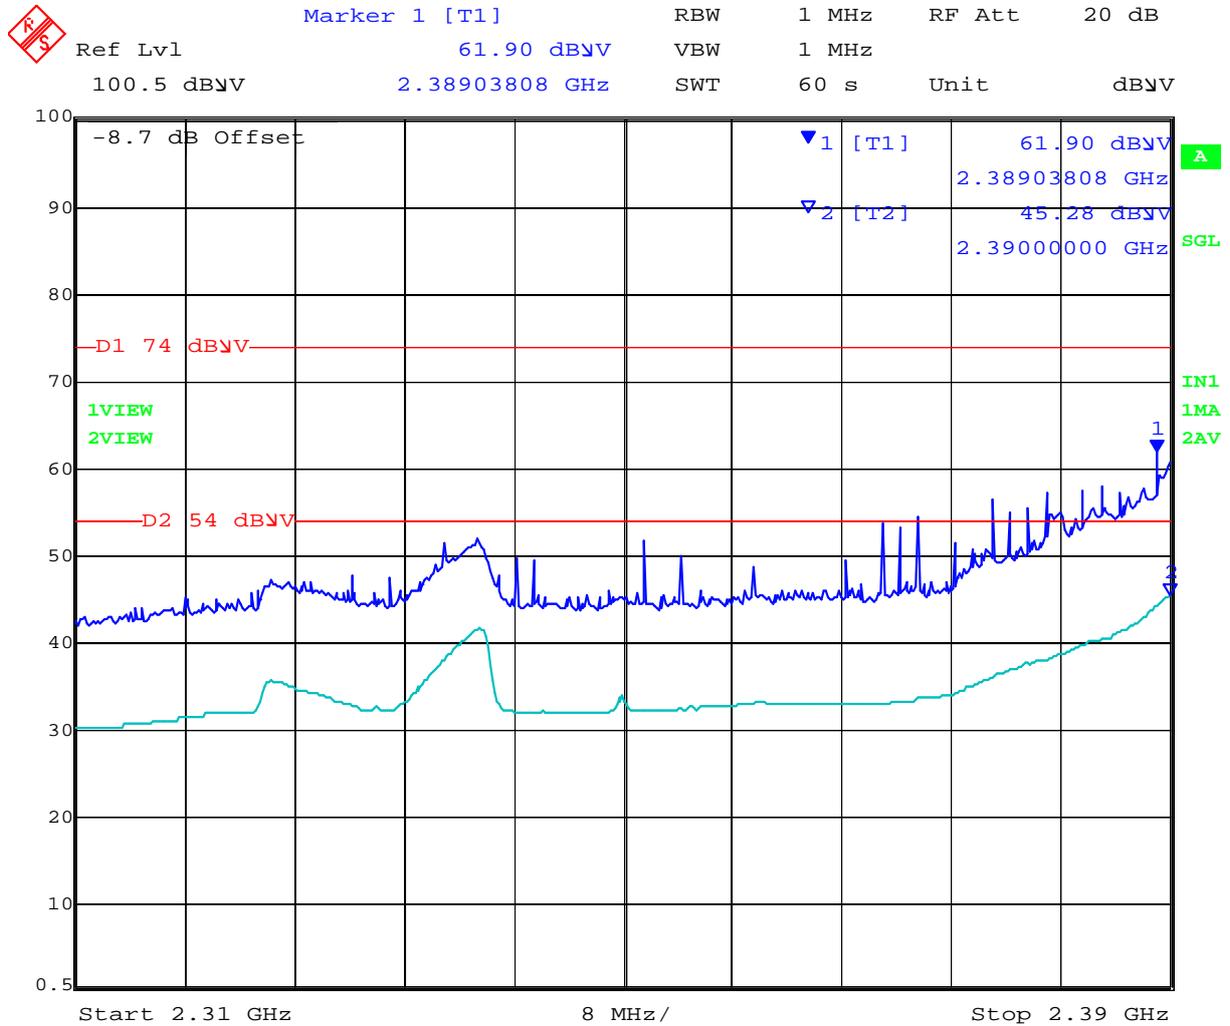

Date: 14.MAY.2012 04:10:17

Pwr = 14

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Band-Edge 2462MHz; 802.11g 2483.5 - 2500 MHz




Date: 14.MAY.2012 04:48:14

Pwr = 14

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Band-Edge 2412MHz; 802.11n HT-20 2310-2390 MHz

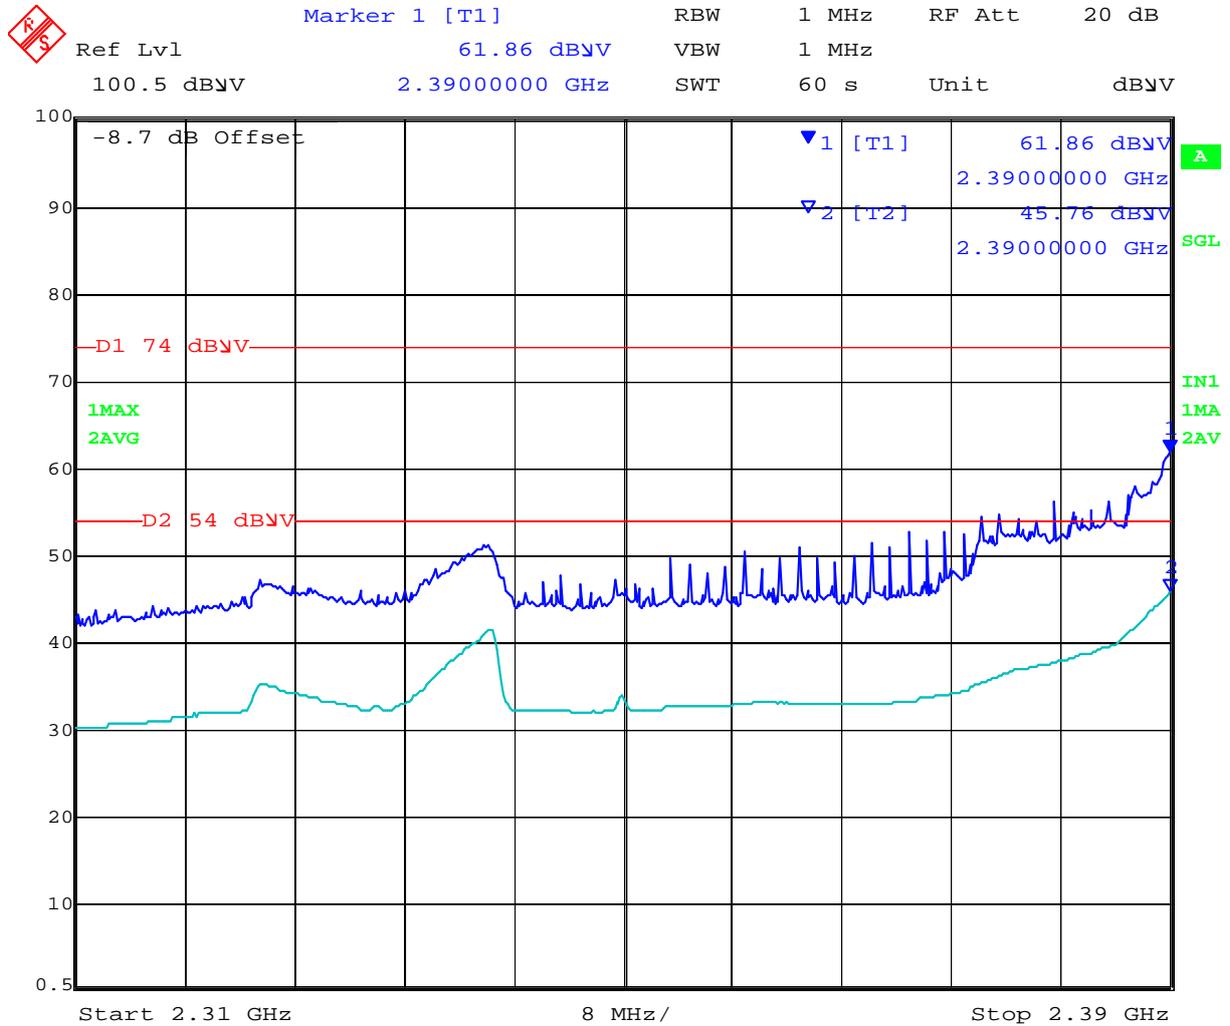


Date: 14.MAY.2012 04:29:13

Pwr = 13

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Band-Edge 2462MHz; 802.11n HT-20 2483.5 - 2500 MHz

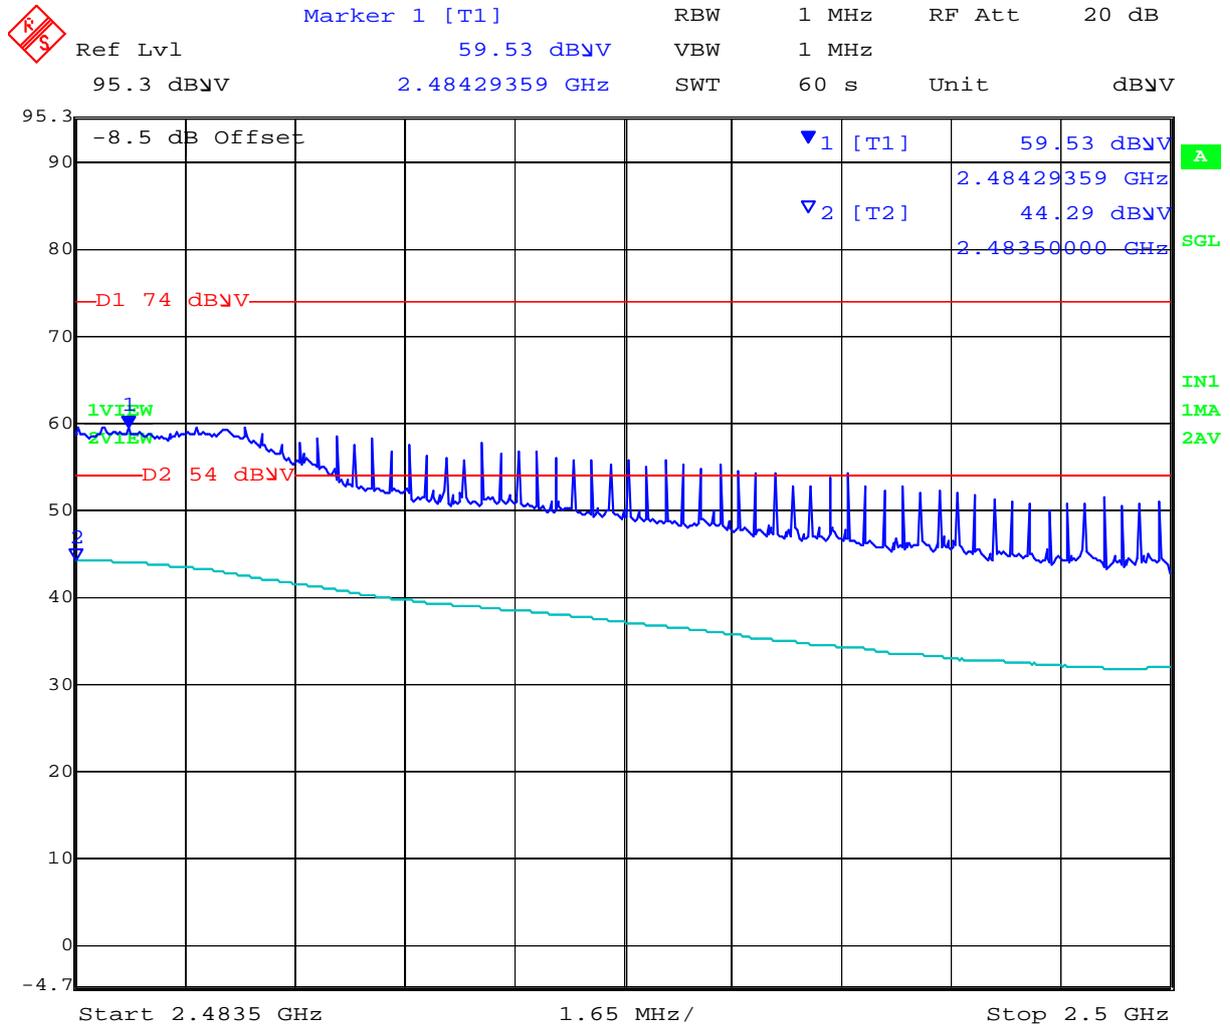


Date: 14.MAY.2012 04:50:51

Pwr = 13

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Band-Edge 2422MHz; 802.11n HT-40 2310-2390 MHz

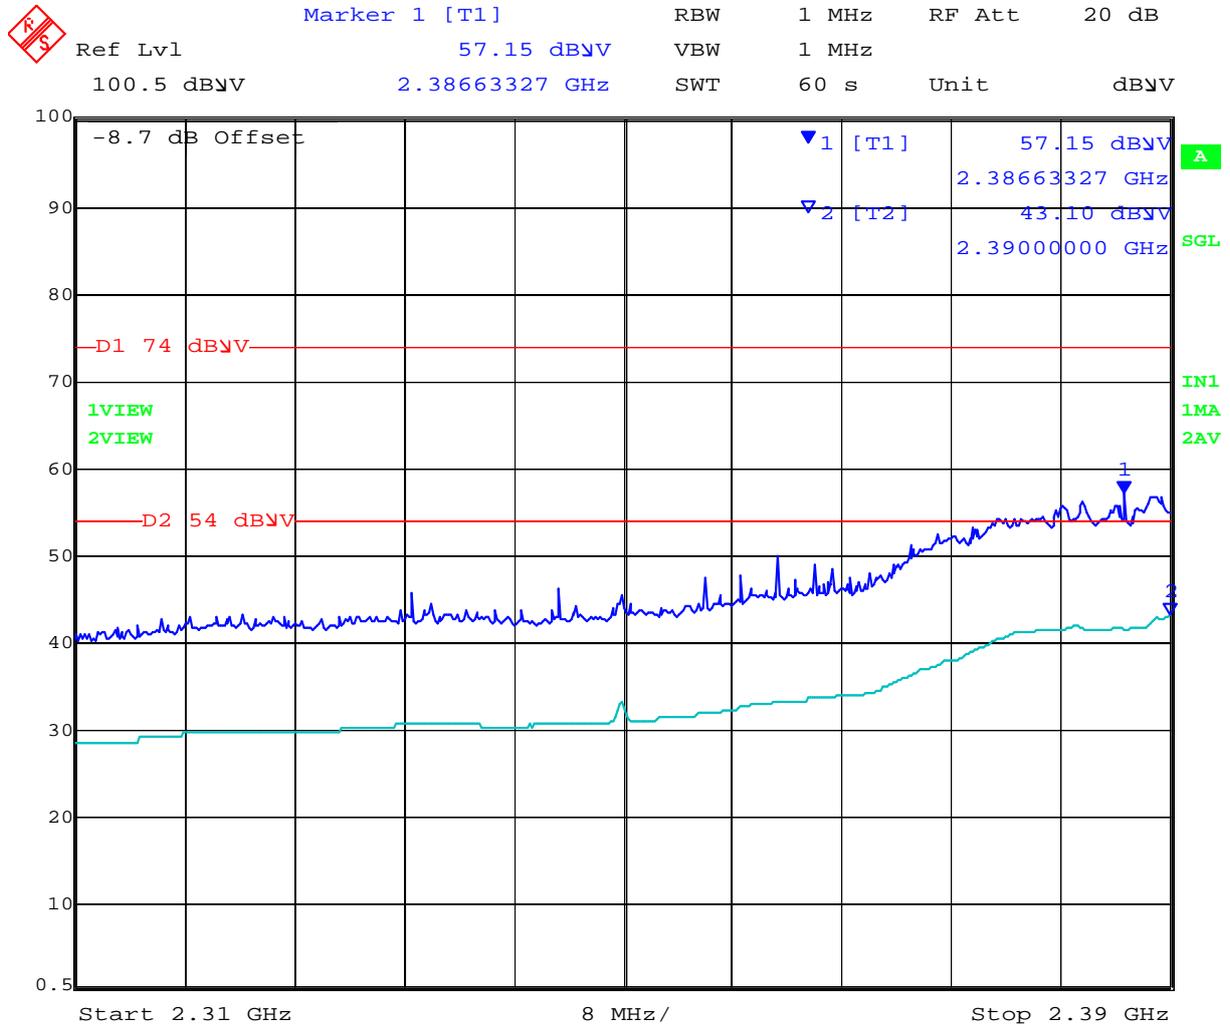

Date: 14.MAY.2012 04:32:23

Pwr = 13


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





### 7.6.3 Peak Emission

<b>Test Freq.</b>	2437 MHz	<b>Engineer</b>	SB
<b>Variant</b>	802.11b; 1 Mbs	<b>Temp (°C)</b>	25
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	32
<b>Power Setting</b>	18 dBm	<b>Press. (mBars)</b>	1004
<b>Antenna</b>	Main Antenna	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>	Straight Angle Connector; MAC:4C.DE		
<b>Test Notes 2</b>	EUT Horizontal Position (X);		

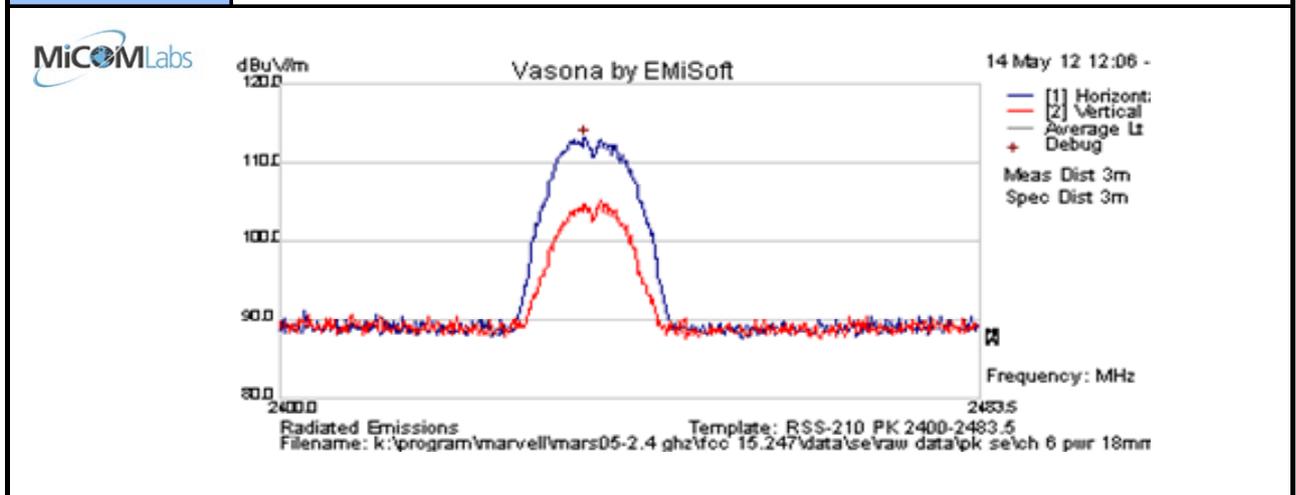

#### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2436.144	67.9	13.0	32.3	113.1	Peak [Scan]	H	100	0				
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

Maximum peak emission observed




**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 119 of 134

### 7.6.4 Receiver Radiated Emissions

#### Measurement Results for Radiated Spurious Emissions – Receiver

<b>Test Freq.</b>	2412 MHz	<b>Engineer</b>	SB
<b>Variant</b>	N/A	<b>Temp (°C)</b>	24
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	33
<b>Power Setting</b>	N/A	<b>Press. (mBars)</b>	998
<b>Antenna</b>	Main Ant	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>	EUT Vertical Position		
<b>Test Notes 2</b>			

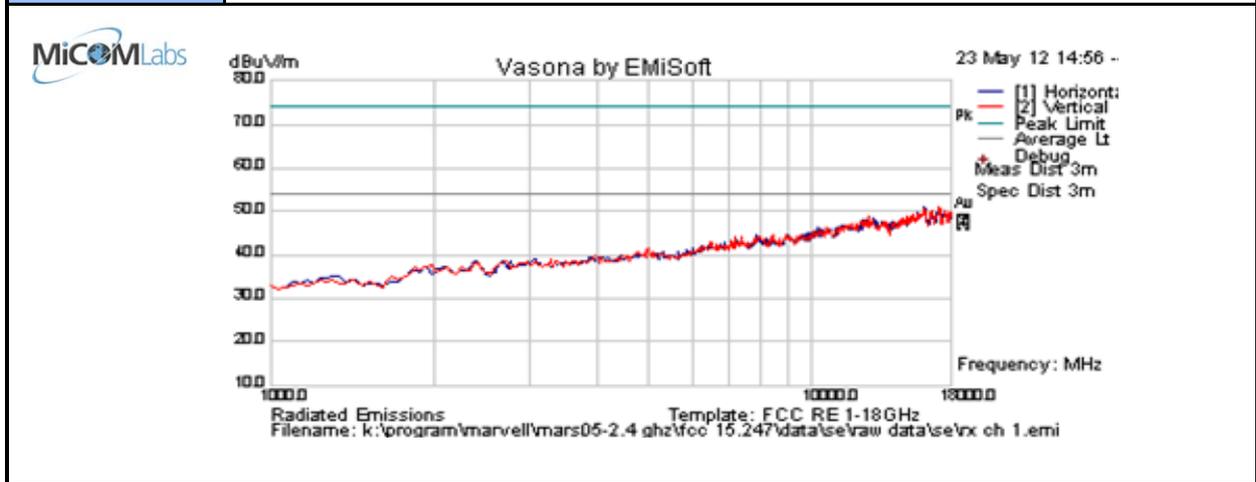

#### Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 120 of 134

<b>Test Freq.</b>	2437 MHz	<b>Engineer</b>	SB
<b>Variant</b>	N/A	<b>Temp (°C)</b>	24
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	33
<b>Power Setting</b>	N/A	<b>Press. (mBars)</b>	998
<b>Antenna</b>	Main Ant	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>	EUT Vertical Position		
<b>Test Notes 2</b>			

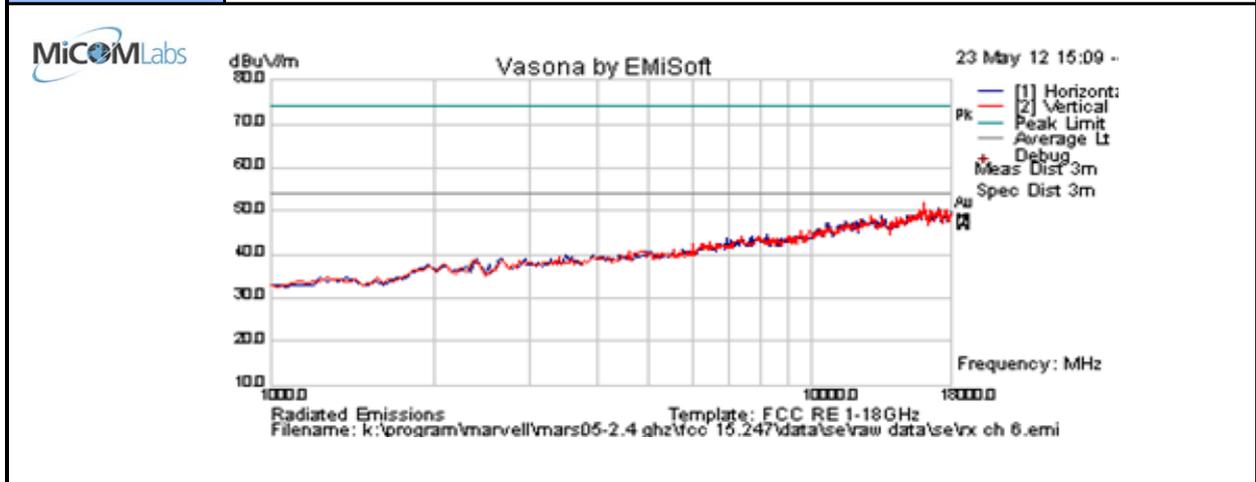

**Formally measured emission peaks**


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 121 of 134

<b>Test Freq.</b>	2462 MHz	<b>Engineer</b>	SB
<b>Variant</b>	N/A	<b>Temp (°C)</b>	24
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	33
<b>Power Setting</b>	N/A	<b>Press. (mBars)</b>	998
<b>Antenna</b>	Main Ant	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>	EUT Vertical Position		
<b>Test Notes 2</b>			

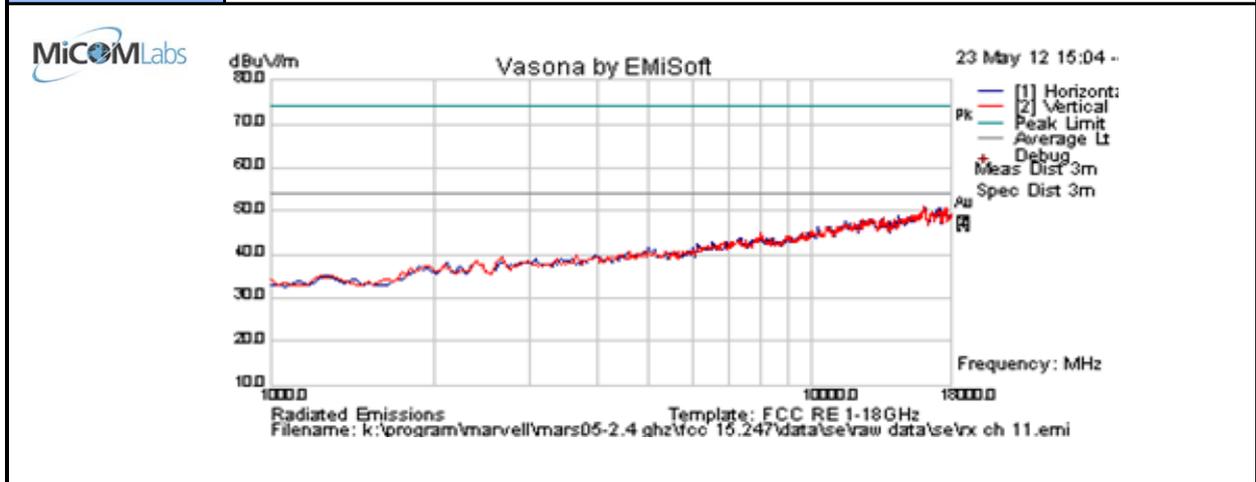

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 122 of 134

---

## **7.7 Conducted Disturbance at Mains Terminal (150 kHz – 30 MHz)**

**NOTE: Test not applicable EUT is a battery powered module**

### **Test Procedure**

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.


If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Test Measurement Setup

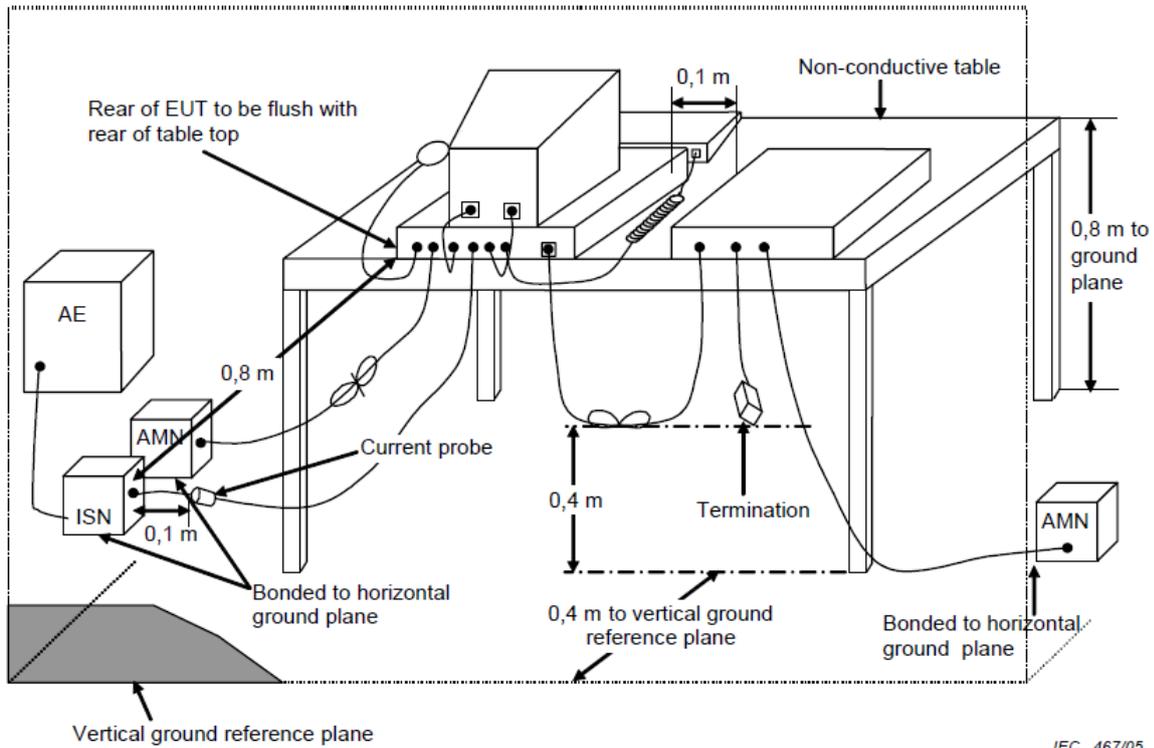

Measurement setup for Conducted Disturbance at Mains Terminals



## Specification for Conducted Disturbance at Mains Terminal – Digital Apparatus

### FCC §15.207 (a)

Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu\Omega$  line impedance stabilization network (LISN), see §15.207 (a) matrix below. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

### RSS-GEN §7.2.4

AC Power Line Conducted Emissions Limits: Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table below. The more stringent limit applies at the frequency range boundaries.

The conducted emissions shall be measured with a 50 ohm/50 microhenry line impedance stabilization network (LISN).

### Limits

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 125 of 134

---

### Traceability

#### Laboratory Measurement Uncertainty for Conducted Emissions

<b>Measurement uncertainty</b>	±2.64 dB
--------------------------------	----------

### Traceability

<b>Method</b>	<b>Test Equipment Used</b>
Work instruction WI-EMC-01	0158, 0184, 0193, 0190, 0293, 0307

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


### 7.7.1 Conducted Disturbance at Mains Terminal (150 kHz – 30 MHz)

**FCC, Part 15 Subpart C §15.207**  
**Industry Canada RSS-Gen §7.2.2**

#### **Test Procedure**

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

#### **Test Measurement Set up**

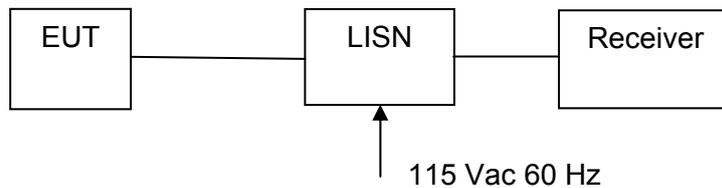

Measurement set up for AC Wireline Conducted Emissions Test

#### **Measurement Results for AC Wireline Conducted Emissions (150 kHz – 30 MHz)**

Ambient conditions.

Temperature: **Error! Reference source not found.** °C

**Reference source not found.** %

**source not found.** mbar


Relative humidity: **Error!**

Pressure: **Error! Reference**



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 127 of 134

<b>Test Freq.</b>	N/A	<b>Engineer</b>	GMH
<b>Variant</b>	AC Line Emissions	<b>Temp (°C)</b>	18.5
<b>Freq. Range</b>	0.150 MHz - 30 MHz	<b>Rel. Hum.(%)</b>	43
<b>Power Setting</b>	Maximum	<b>Press. (mBars)</b>	1015
<b>Antenna</b>	Integral		
<b>Test Notes 1</b>	Unit pinging access point		
<b>Test Notes 2</b>			

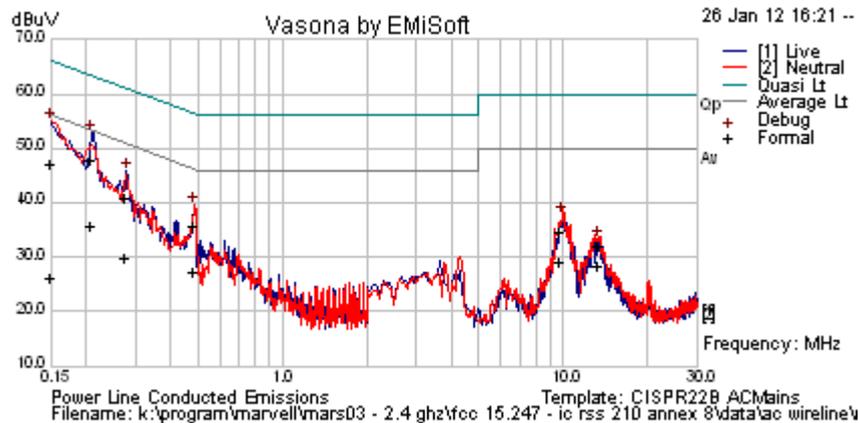

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass /Fail	Comments
0.279	30.9	9.9	0.1	40.9	Quasi Peak	Live	60.85	-20.0	Pass	
0.210	37.9	9.9	0.1	47.8	Quasi Peak	Live	63.2	-15.4	Pass	
0.487	25.7	9.9	0.1	35.7	Quasi Peak	Neutral	56.22	-20.6	Pass	
0.150	37.2	9.9	0.1	47.2	Quasi Peak	Neutral	66	-18.8	Pass	
9.827	24.0	10.3	0.4	34.7	Quasi Peak	Neutral	60	-25.3	Pass	
13.362	21.2	10.4	0.6	32.1	Quasi Peak	Neutral	60	-27.9	Pass	
0.279	19.8	9.9	0.1	29.7	Average	Live	50.85	-21.1	Pass	
0.210	25.7	9.9	0.1	35.7	Average	Live	53.2	-17.5	Pass	
0.487	17.3	9.9	0.1	27.3	Average	Neutral	46.22	-18.9	Pass	
0.150	16.1	9.9	0.1	26.1	Average	Neutral	56	-29.9	Pass	
9.827	18.4	10.3	0.4	29.0	Average	Neutral	50	-21.0	Pass	
13.362	17.5	10.4	0.6	28.4	Average	Neutral	50	-21.6	Pass	

Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency  
 NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## Specification

### Limit

**§15.207 (a)** Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu\Omega$  line impedance stabilization network (LISN), see §15.207 (a) matrix below. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

### RSS-Gen §7.2.2

The radio frequency voltage that is conducted back into the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table below. The tighter limit applies at the frequency range boundaries.

### §15.207 (a) and RSS-Gen §7.2.2 Limit Matrix

The lower limit applies at the boundary between frequency ranges

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency

### Laboratory Measurement Uncertainty for Conducted Emissions



Measurement uncertainty	$\pm 2.64$ dB
-------------------------	---------------

### Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-EMC-01 'Measurement of Conducted Emissions'	0158, 0184, 0287, 0190, 0293, 0307




## 8.2 Transmitter Radiated Spurious Emission above 1 GHz

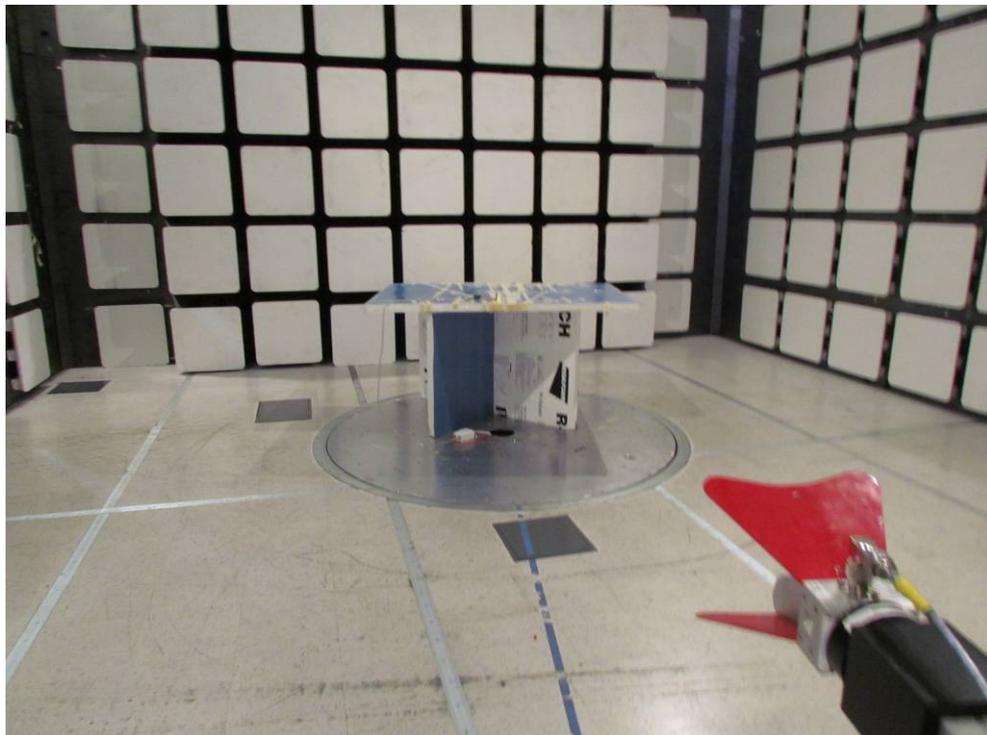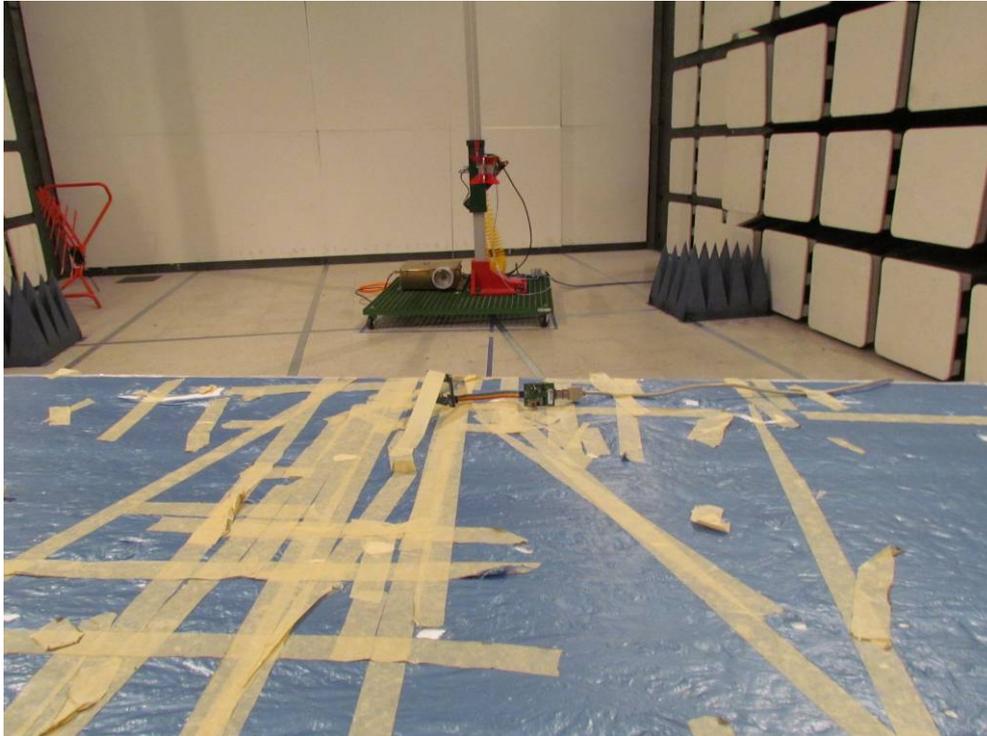

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


### 8.3 Transmitter Radiated Spurious Emission below 1 GHz

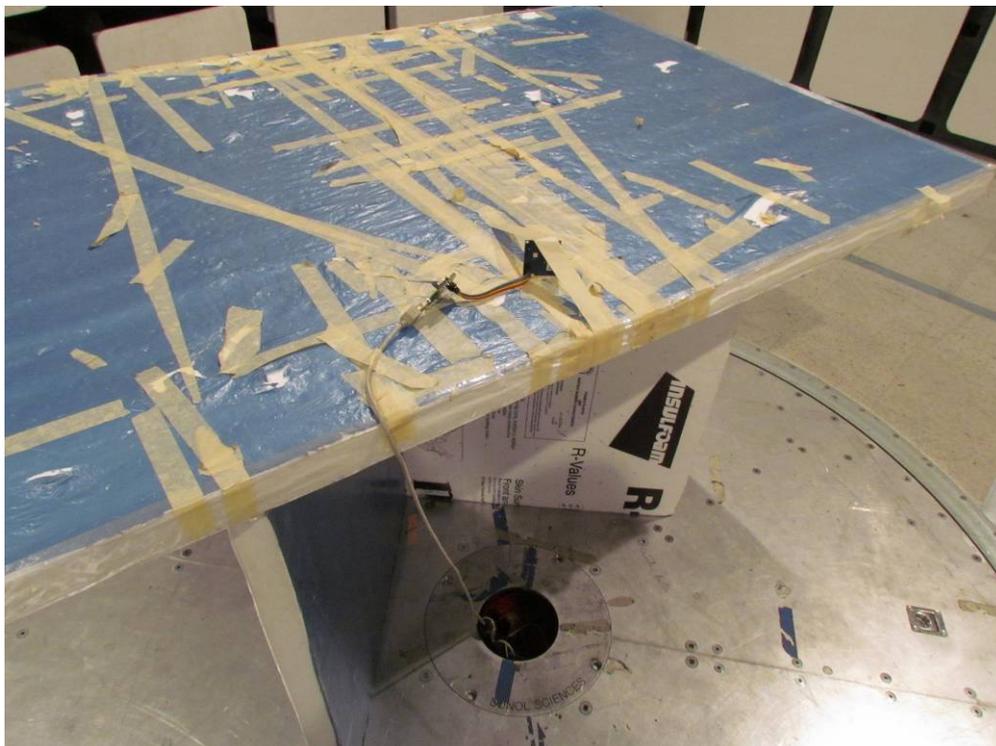

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

#### 8.4 AC Wireline Emissions

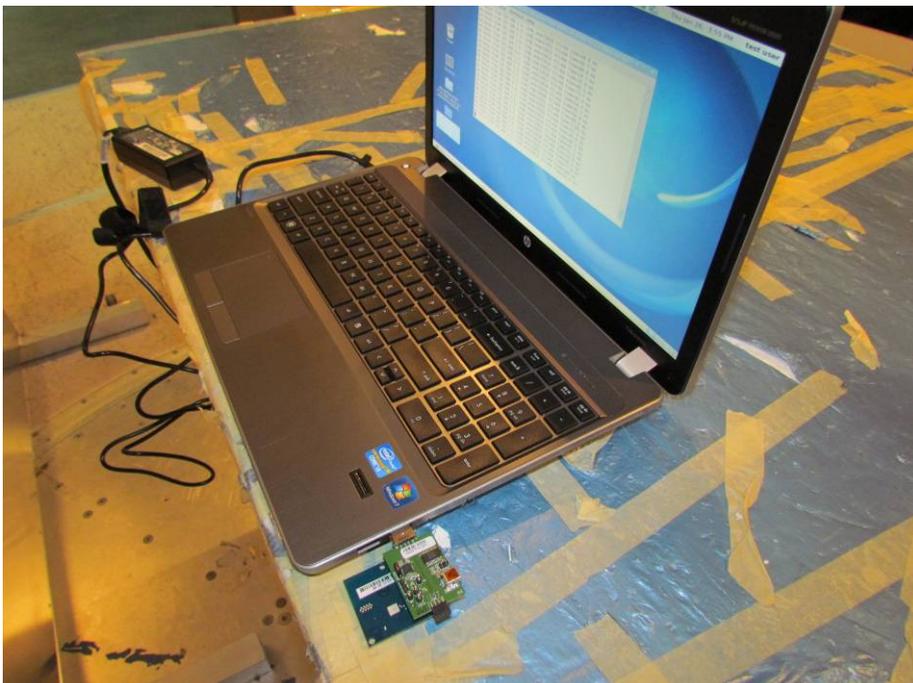

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett-Packard SDG0B-1292  
**To:** FCC 47 CFR Part 15.247 & RSS-210  
**Serial #:** MARS05-U1 Rev A  
**Issue Date:** 16<sup>th</sup> July 2012  
**Page:** Page 133 of 134

## 9 TEST EQUIPMENT DETAILS

Asset #	Instrument	Manufacturer	Part #	Serial #
0134	Amplifier	Com Power	PA 122	181910
0158	Barometer /Thermometer	Control Co.	4196	E2846
0287	EMI Receiver	Rhode & Schwartz	ESIB 40	100201
0193	EMI Receiver	Rhode & Schwartz	ESIB 7	838496/007
0252	SMA Cable	Megaphase	Sucoflex 104	None
0310	2m SMA Cable	Micro-Coax	UFA210A-0-0787-3G03G0	209089-001
0312	3m SMA Cable	Micro-Coax	UFA210A-1-1181-3G0300	209092-001
0313	Coupler	Hewlett Packard	86205A	3140A01285
0314	30dB N-Type Attenuator	ARRA	N9444-30	1623
0070	Power Meter	Hewlett Packard	437B	3125U11552
0116	Power Sensor	Hewlett Packard	8485A	3318A19694
0117	Power Sensor	Hewlett Packard	8487D	3318A00371
0184	Pulse Limiter	Rhode & Schwartz	ESH3Z2	357.8810.52
0190	LISN	Rhode & Schwartz	ESH3Z5	836679/006
0293	BNC Cable	Megaphase	1689 1GVT4	15F50B001
0301	5.6 GHz Notch Filter	Micro-Tronics	RBC50704	001
0302	5.25 GHz Notch Filter	Micro-Tronics	BRC50703	002
0303	5.8 GHz Notch Filter	Micro-Tronics	BRC50705	003
0304	2.4GHzHz Notch Filter	Micro-Tronics	--	001
0307	BNC Cable	Megaphase	1689 1GVT4	15F50B002
0335	1-18GHz Horn Antenna	ETS- Lindgren	3117	00066580
0337	Amplifier	MiCOM Labs	--	--
0338	Antenna	Sunol Sciences	JB-3	A052907
0342	2.4 GHz Notch Filter	EWT	EWT-14-0203	H1

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



440 Boulder Court, Suite 200  
Pleasanton, CA 94566, USA  
Tel: 1.925.462.0304  
Fax: 1.925.462.0306  
[www.micomlabs.com](http://www.micomlabs.com)