


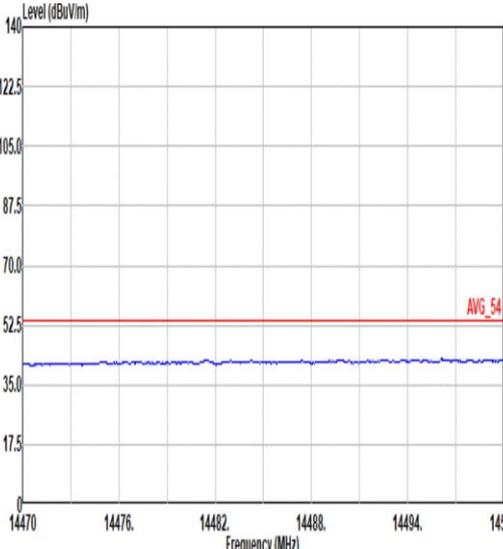
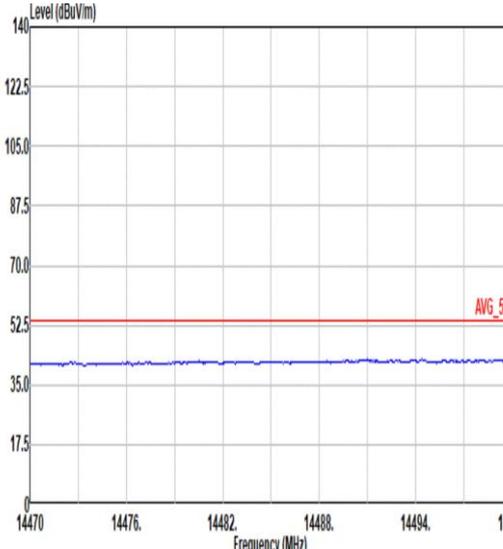
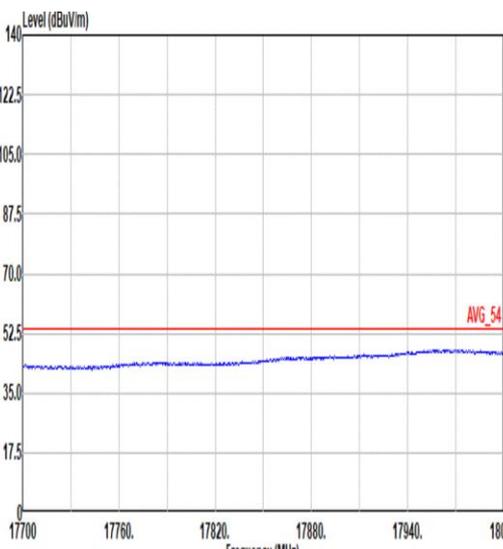
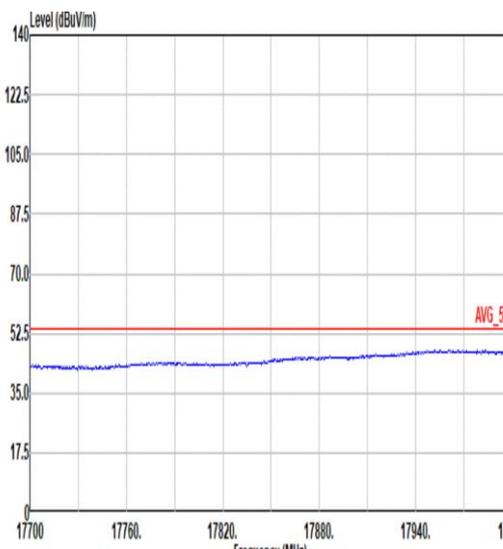
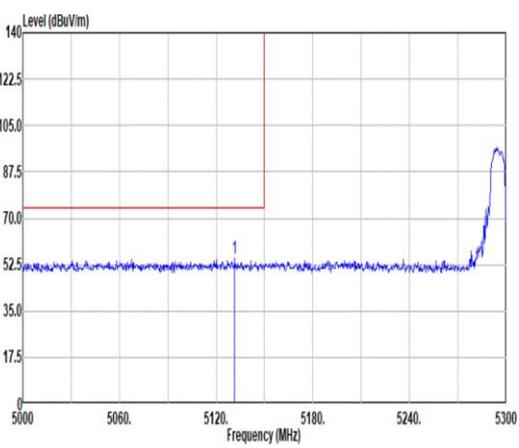


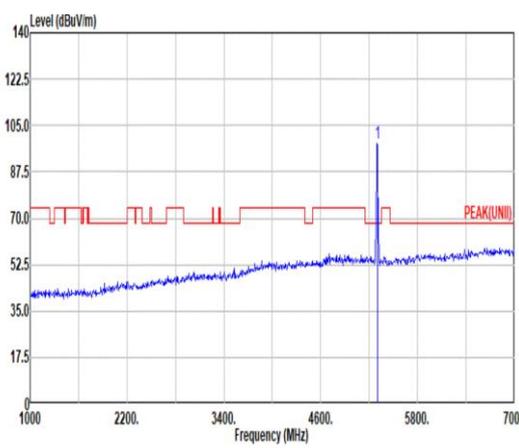

<b>Mode</b>	26	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_52/38 RU_5300MHz	
<b>ANT</b>	1	
<b>Pol.</b>	<b>Horizontal</b>	<b>Vertical</b>
<b>14.47G</b> <b>~14.5G</b> <b>Avg</b>	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 HORIZONTAL</p>	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 VERTICAL</p>
<b>17.7G</b> <b>~18G</b> <b>Avg</b>	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 HORIZONTAL</p>	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 VERTICAL</p>

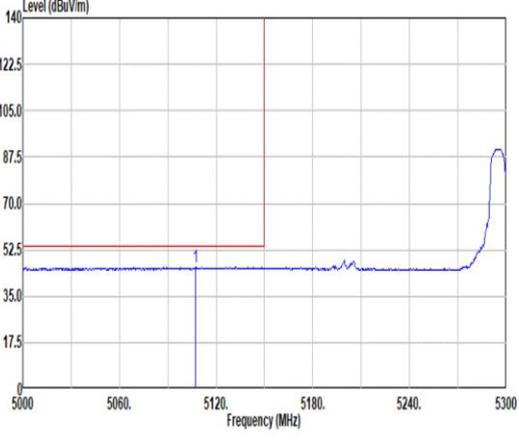

		27																																																																												
Mode		Band Edge - L																																																																												
		U-NII-2A_5.25-5.35_802.11ax HE20_CH60_106/53 RU_5300MHz																																																																												
ANT		1																																																																												
Pol.	Horizontal	Fundamental																																																																												
Peak	 <p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5131.40</td> <td>54.75</td> <td>74.00</td> <td>-19.25</td> <td>43.78</td> <td>33.33</td> <td>10.68</td> <td>33.04</td> <td>0.00</td> <td>109 61 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5131.40	54.75	74.00	-19.25	43.78	33.33	10.68	33.04	0.00	109 61 PEAK	 <p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5300.00</td> <td>98.15</td> <td>-----</td> <td>-----</td> <td>86.86</td> <td>33.02</td> <td>11.37</td> <td>33.10</td> <td>0.00</td> <td>109 61 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5300.00	98.15	-----	-----	86.86	33.02	11.37	33.10	0.00	109 61 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5131.40	54.75	74.00	-19.25	43.78	33.33	10.68	33.04	0.00	109 61 PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5300.00	98.15	-----	-----	86.86	33.02	11.37	33.10	0.00	109 61 PEAK																																																																					
Avg	 <p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5107.10</td> <td>46.04</td> <td>54.00</td> <td>-7.96</td> <td>35.22</td> <td>33.23</td> <td>10.63</td> <td>33.04</td> <td>0.00</td> <td>109 61 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5107.10	46.04	54.00	-7.96	35.22	33.23	10.63	33.04	0.00	109 61 AVERAGE	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5300.00</td> <td>91.92</td> <td>-----</td> <td>-----</td> <td>80.63</td> <td>33.02</td> <td>11.37</td> <td>33.10</td> <td>0.00</td> <td>109 61 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5300.00	91.92	-----	-----	80.63	33.02	11.37	33.10	0.00	109 61 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5107.10	46.04	54.00	-7.96	35.22	33.23	10.63	33.04	0.00	109 61 AVERAGE																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5300.00	91.92	-----	-----	80.63	33.02	11.37	33.10	0.00	109 61 AVERAGE																																																																					

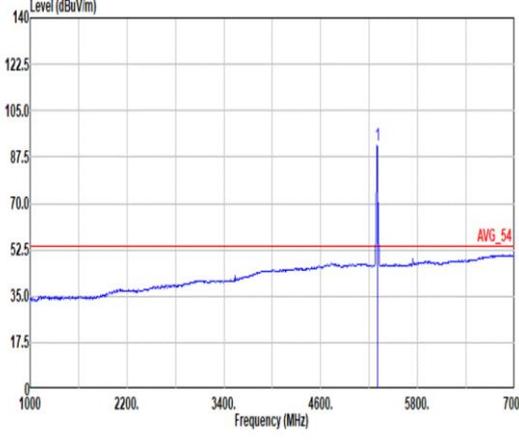

Mode	27																																								
	Band Edge - R																																								
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_106/53 RU_5300MHz																																								
ANT	1																																								
Pol.	Horizontal	Fundamental																																							
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PEAK_BE_74</p> <p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91280-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5396.24</td> <td>54.21</td> <td>74.00</td> <td>-19.79</td> <td>42.40</td> <td>33.00</td> <td>11.95</td> <td>33.14</td> <td>0.00</td> <td>109</td> <td>61 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5396.24	54.21	74.00	-19.79	42.40	33.00	11.95	33.14	0.00	109	61 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5396.24	54.21	74.00	-19.79	42.40	33.00	11.95	33.14	0.00	109	61 PEAK																															
Avg	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>AVG_BE_54</p> <p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91280-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5406.24</td> <td>45.93</td> <td>54.00</td> <td>-8.07</td> <td>34.14</td> <td>33.00</td> <td>11.93</td> <td>33.14</td> <td>0.00</td> <td>109</td> <td>61 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5406.24	45.93	54.00	-8.07	34.14	33.00	11.93	33.14	0.00	109	61 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5406.24	45.93	54.00	-8.07	34.14	33.00	11.93	33.14	0.00	109	61 AVERAGE																															



<b>27</b>																																																	
<b>Mode</b>																																																	
<b>Band Edge - L</b>																																																	
<b>U-NII-2A_5.25-5.35_802.11ax HE20_CH60_106/53 RU_5300MHz</b>																																																	
<b>ANT</b>																																																	
<b>1</b>																																																	
<b>Pol.</b>	<b>Vertical</b>																																																
<b>Peak</b>	<p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5143.70</td> <td>54.79</td> <td>74.00</td> <td>-19.21</td> <td>43.76</td> <td>33.37</td> <td>10.71</td> <td>33.05</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>200</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>82 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5143.70	54.79	74.00	-19.21	43.76	33.37	10.71	33.05							0.00	200								82 PEAK
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																										
1 5143.70	54.79	74.00	-19.21	43.76	33.37	10.71	33.05																																										
						0.00	200																																										
							82 PEAK																																										
	<b>Fundamental</b>																																																
	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5300.00</td> <td>93.55</td> <td>-----</td> <td>-----</td> <td>82.26</td> <td>33.02</td> <td>11.37</td> <td>33.10</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>200</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>82 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5300.00	93.55	-----	-----	82.26	33.02	11.37	33.10							0.00	200								82 PEAK
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																										
1 5300.00	93.55	-----	-----	82.26	33.02	11.37	33.10																																										
						0.00	200																																										
							82 PEAK																																										
<b>Avg</b>	<p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5124.50</td> <td>46.04</td> <td>54.00</td> <td>-7.96</td> <td>35.12</td> <td>33.30</td> <td>10.66</td> <td>33.04</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>200</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>82 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5124.50	46.04	54.00	-7.96	35.12	33.30	10.66	33.04							0.00	200								82 AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																										
1 5124.50	46.04	54.00	-7.96	35.12	33.30	10.66	33.04																																										
						0.00	200																																										
							82 AVERAGE																																										
	<p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5300.00</td> <td>87.30</td> <td>-----</td> <td>-----</td> <td>76.01</td> <td>33.02</td> <td>11.37</td> <td>33.10</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>200</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>82 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5300.00	87.30	-----	-----	76.01	33.02	11.37	33.10							0.00	200								82 AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																										
1 5300.00	87.30	-----	-----	76.01	33.02	11.37	33.10																																										
						0.00	200																																										
							82 AVERAGE																																										



Mode	27																																						
	Band Edge - R																																						
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_106/53 RU_5300MHz																																						
ANT	1																																						
Pol.	Vertical	Fundamental																																					
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5358.56</td> <td>53.61</td> <td>74.00</td> <td>-20.39</td> <td>41.92</td> <td>33.08</td> <td>11.73</td> <td>33.12</td> <td>0.00</td> <td>200 82 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5358.56	53.61	74.00	-20.39	41.92	33.08	11.73	33.12	0.00	200 82 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																															
1 5358.56	53.61	74.00	-20.39	41.92	33.08	11.73	33.12	0.00	200 82 PEAK																														
Avg	<p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5398.24</td> <td>45.76</td> <td>54.00</td> <td>-8.24</td> <td>33.95</td> <td>33.00</td> <td>11.95</td> <td>33.14</td> <td>0.00</td> <td>200 82 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5398.24	45.76	54.00	-8.24	33.95	33.00	11.95	33.14	0.00	200 82 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																															
1 5398.24	45.76	54.00	-8.24	33.95	33.00	11.95	33.14	0.00	200 82 AVERAGE																														







Mode	27																																																																																																																																																																															
	Harmonic																																																																																																																																																																															
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_106/53 RU_5300MHz																																																																																																																																																																															
ANT	1																																																																																																																																																																															
Pol.	Horizontal	Vertical																																																																																																																																																																														
Peak Avg	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 7066.00</td> <td>51.69</td> <td>68.20</td> <td>-16.51</td> <td>66.27</td> <td>36.40</td> <td>13.94</td> <td>65.83</td> <td>0.91</td> <td>206</td> <td>196</td> <td>Peak</td> </tr> <tr> <td>2 10600.00</td> <td>48.96</td> <td>74.00</td> <td>-25.04</td> <td>59.73</td> <td>39.10</td> <td>17.21</td> <td>67.34</td> <td>0.26</td> <td>221</td> <td>219</td> <td>PEAK</td> </tr> <tr> <td>3 10600.00</td> <td>39.95</td> <td>54.00</td> <td>-14.05</td> <td>50.72</td> <td>39.10</td> <td>17.21</td> <td>67.34</td> <td>0.26</td> <td>221</td> <td>219</td> <td>Average</td> </tr> <tr> <td>4 15900.00</td> <td>50.33</td> <td>74.00</td> <td>-23.67</td> <td>57.32</td> <td>37.90</td> <td>22.21</td> <td>67.47</td> <td>0.37</td> <td>245</td> <td>207</td> <td>Peak</td> </tr> <tr> <td>5 15900.00</td> <td>41.38</td> <td>54.00</td> <td>-12.62</td> <td>48.37</td> <td>37.90</td> <td>22.21</td> <td>67.47</td> <td>0.37</td> <td>245</td> <td>207</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 7066.00	51.69	68.20	-16.51	66.27	36.40	13.94	65.83	0.91	206	196	Peak	2 10600.00	48.96	74.00	-25.04	59.73	39.10	17.21	67.34	0.26	221	219	PEAK	3 10600.00	39.95	54.00	-14.05	50.72	39.10	17.21	67.34	0.26	221	219	Average	4 15900.00	50.33	74.00	-23.67	57.32	37.90	22.21	67.47	0.37	245	207	Peak	5 15900.00	41.38	54.00	-12.62	48.37	37.90	22.21	67.47	0.37	245	207	Average	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 7066.00</td> <td>55.67</td> <td>68.20</td> <td>-12.53</td> <td>70.25</td> <td>36.40</td> <td>13.94</td> <td>65.83</td> <td>0.91</td> <td>100</td> <td>266</td> <td>Peak</td> </tr> <tr> <td>2 10600.00</td> <td>48.30</td> <td>74.00</td> <td>-25.70</td> <td>59.07</td> <td>39.10</td> <td>17.21</td> <td>67.34</td> <td>0.26</td> <td>100</td> <td>276</td> <td>PEAK</td> </tr> <tr> <td>3 10600.00</td> <td>39.24</td> <td>54.00</td> <td>-14.76</td> <td>50.01</td> <td>39.10</td> <td>17.21</td> <td>67.34</td> <td>0.26</td> <td>100</td> <td>276</td> <td>Average</td> </tr> <tr> <td>4 15900.00</td> <td>49.51</td> <td>74.00</td> <td>-24.49</td> <td>56.50</td> <td>37.90</td> <td>22.21</td> <td>67.47</td> <td>0.37</td> <td>103</td> <td>245</td> <td>PEAK</td> </tr> <tr> <td>5 15900.00</td> <td>40.50</td> <td>54.00</td> <td>-13.50</td> <td>47.49</td> <td>37.90</td> <td>22.21</td> <td>67.47</td> <td>0.37</td> <td>103</td> <td>245</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 7066.00	55.67	68.20	-12.53	70.25	36.40	13.94	65.83	0.91	100	266	Peak	2 10600.00	48.30	74.00	-25.70	59.07	39.10	17.21	67.34	0.26	100	276	PEAK	3 10600.00	39.24	54.00	-14.76	50.01	39.10	17.21	67.34	0.26	100	276	Average	4 15900.00	49.51	74.00	-24.49	56.50	37.90	22.21	67.47	0.37	103	245	PEAK	5 15900.00	40.50	54.00	-13.50	47.49	37.90	22.21	67.47	0.37	103	245	Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																																																																								
1 7066.00	51.69	68.20	-16.51	66.27	36.40	13.94	65.83	0.91	206	196	Peak																																																																																																																																																																					
2 10600.00	48.96	74.00	-25.04	59.73	39.10	17.21	67.34	0.26	221	219	PEAK																																																																																																																																																																					
3 10600.00	39.95	54.00	-14.05	50.72	39.10	17.21	67.34	0.26	221	219	Average																																																																																																																																																																					
4 15900.00	50.33	74.00	-23.67	57.32	37.90	22.21	67.47	0.37	245	207	Peak																																																																																																																																																																					
5 15900.00	41.38	54.00	-12.62	48.37	37.90	22.21	67.47	0.37	245	207	Average																																																																																																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																								
1 7066.00	55.67	68.20	-12.53	70.25	36.40	13.94	65.83	0.91	100	266	Peak																																																																																																																																																																					
2 10600.00	48.30	74.00	-25.70	59.07	39.10	17.21	67.34	0.26	100	276	PEAK																																																																																																																																																																					
3 10600.00	39.24	54.00	-14.76	50.01	39.10	17.21	67.34	0.26	100	276	Average																																																																																																																																																																					
4 15900.00	49.51	74.00	-24.49	56.50	37.90	22.21	67.47	0.37	103	245	PEAK																																																																																																																																																																					
5 15900.00	40.50	54.00	-13.50	47.49	37.90	22.21	67.47	0.37	103	245	Average																																																																																																																																																																					







<b>Mode</b>	<b>27</b>	
	<b>Harmonic</b>	
	<b>U-NII-2A_5.25-5.35_802.11ax HE20_CH60_106/53 RU_5300MHz</b>	
<b>ANT</b>	<b>1</b>	
<b>Pol.</b>	<b>Horizontal</b>	<b>Vertical</b>
<b>14.47G ~14.5G Avg</b>	<p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 HORIZONTAL</p>	<p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 VERTICAL</p>
	<b>17.7G ~18G Avg</b>	<p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 HORIZONTAL</p>

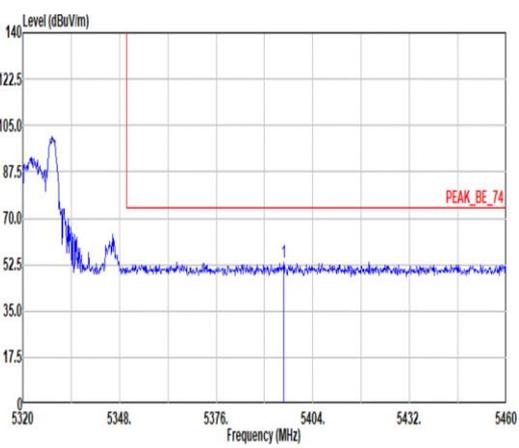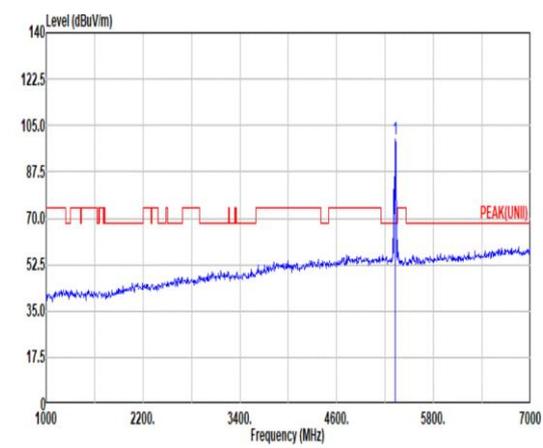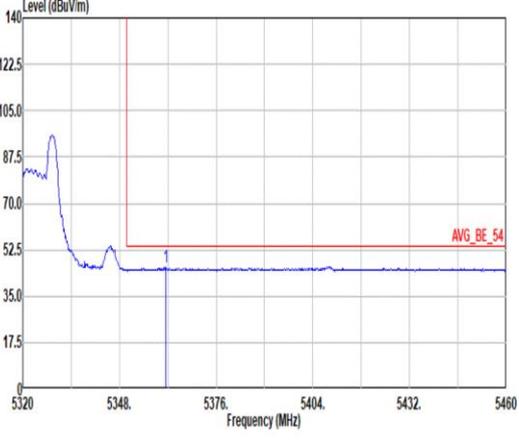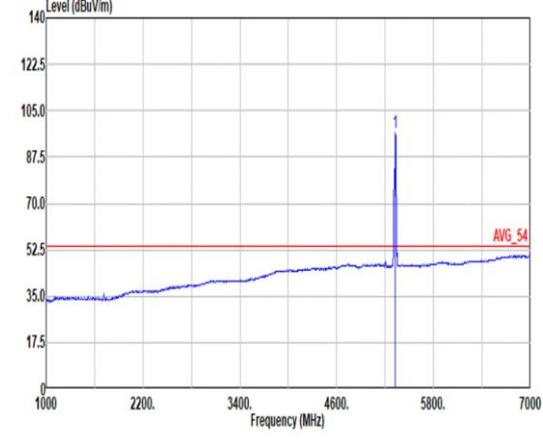

Mode	28																																																																	
	Band Edge																																																																	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_26/8 RU_5320MHz																																																																	
ANT	1																																																																	
Pol.	Horizontal	Fundamental																																																																
Peak	 <p>Level (dBuV/m)</p> <p>140 122.5 105.0 87.5 70.0 52.5 35.0 17.5</p> <p>5320 5348 5376 5404 5432 5460</p> <p>Frequency (MHz)</p> <p>PEAK_BE_74</p> <p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5395.46</td> <td>53.53</td> <td>74.00</td> <td>-20.47</td> <td>41.72</td> <td>33.01</td> <td>11.93</td> <td>33.13</td> <td>0.00</td> <td>100</td> <td>66</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5395.46	53.53	74.00	-20.47	41.72	33.01	11.93	33.13	0.00	100	66	PEAK	 <p>Level (dBuV/m)</p> <p>140 122.5 105.0 87.5 70.0 52.5 35.0 17.5</p> <p>1000 2200 3400 4600 5800 7000</p> <p>Frequency (MHz)</p> <p>PEAK(UNI)</p> <p>Site : 03CH12-HY Condition: PEAK(UNI) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>100.05</td> <td>-----</td> <td>-----</td> <td>88.57</td> <td>33.05</td> <td>11.54</td> <td>33.11</td> <td>0.00</td> <td>100</td> <td>66</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5320.00	100.05	-----	-----	88.57	33.05	11.54	33.11	0.00	100	66	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																								
1	5395.46	53.53	74.00	-20.47	41.72	33.01	11.93	33.13	0.00	100	66	PEAK																																																						
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																								
1	5320.00	100.05	-----	-----	88.57	33.05	11.54	33.11	0.00	100	66	PEAK																																																						
Avg	 <p>Level (dBuV/m)</p> <p>140 122.5 105.0 87.5 70.0 52.5 35.0 17.5</p> <p>5320 5348 5376 5404 5432 5460</p> <p>Frequency (MHz)</p> <p>AVG_BE_54</p> <p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5361.30</td> <td>46.16</td> <td>54.00</td> <td>-7.84</td> <td>34.46</td> <td>33.00</td> <td>11.74</td> <td>33.12</td> <td>0.00</td> <td>100</td> <td>66</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5361.30	46.16	54.00	-7.84	34.46	33.00	11.74	33.12	0.00	100	66	AVERAGE	 <p>Level (dBuV/m)</p> <p>140 122.5 105.0 87.5 70.0 52.5 35.0 17.5</p> <p>1000 2200 3400 4600 5800 7000</p> <p>Frequency (MHz)</p> <p>AVG_54</p> <p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>96.55</td> <td>-----</td> <td>-----</td> <td>85.07</td> <td>33.05</td> <td>11.54</td> <td>33.11</td> <td>0.00</td> <td>100</td> <td>66</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5320.00	96.55	-----	-----	85.07	33.05	11.54	33.11	0.00	100	66	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																								
1	5361.30	46.16	54.00	-7.84	34.46	33.00	11.74	33.12	0.00	100	66	AVERAGE																																																						
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																								
1	5320.00	96.55	-----	-----	85.07	33.05	11.54	33.11	0.00	100	66	AVERAGE																																																						

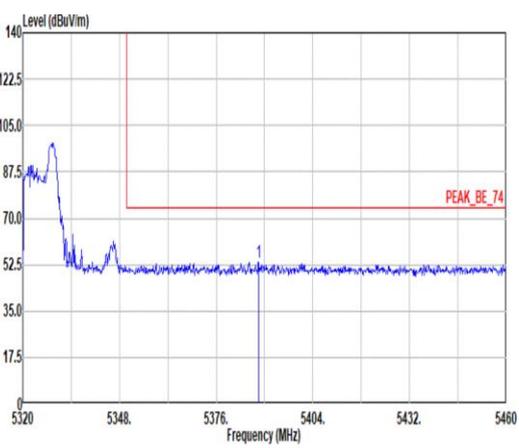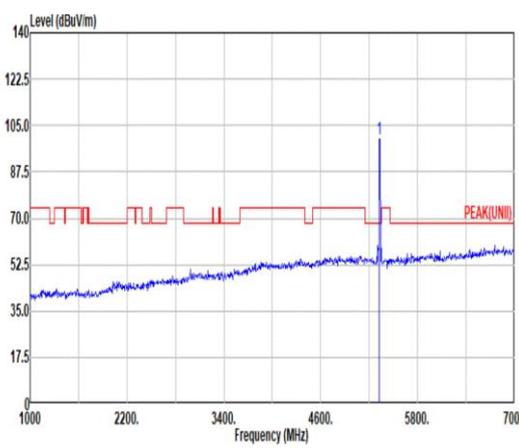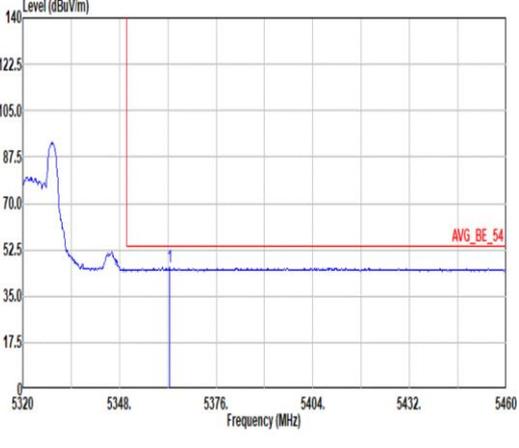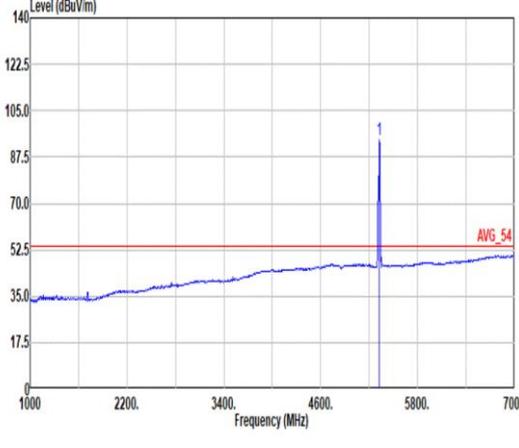

Mode	28																																																																																	
	Band Edge																																																																																	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_26/8 RU_5320MHz																																																																																	
ANT	1																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) showing a peak at 5388.32 MHz. A red line indicates the limit at 74.00 dBuV/m.</p> <p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5388.32</td> <td>53.43</td> <td>74.00</td> <td>-20.57</td> <td>41.65</td> <td>33.02</td> <td>11.89</td> <td>33.13</td> <td>0.00</td> <td>253</td> <td>85 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5388.32	53.43	74.00	-20.57	41.65	33.02	11.89	33.13	0.00	253	85 PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) showing a peak at 5320.00 MHz. A red line indicates the limit at 70.00 dBuV/m.</p> <p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>99.95</td> <td>70.00</td> <td>29.95</td> <td>88.47</td> <td>33.05</td> <td>11.54</td> <td>33.11</td> <td>0.00</td> <td>253</td> <td>85 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5320.00	99.95	70.00	29.95	88.47	33.05	11.54	33.11	0.00	253	85 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																								
1 5388.32	53.43	74.00	-20.57	41.65	33.02	11.89	33.13	0.00	253	85 PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																								
1 5320.00	99.95	70.00	29.95	88.47	33.05	11.54	33.11	0.00	253	85 PEAK																																																																								
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) showing an average level at 5362.42 MHz. A red line indicates the limit at 54.00 dBuV/m.</p> <p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5362.42</td> <td>46.09</td> <td>54.00</td> <td>-7.91</td> <td>34.38</td> <td>33.00</td> <td>11.75</td> <td>33.12</td> <td>0.00</td> <td>253</td> <td>85 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5362.42	46.09	54.00	-7.91	34.38	33.00	11.75	33.12	0.00	253	85 AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) showing an average level at 5320.00 MHz. A red line indicates the limit at 52.50 dBuV/m.</p> <p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>93.90</td> <td>52.50</td> <td>41.40</td> <td>82.42</td> <td>33.05</td> <td>11.54</td> <td>33.11</td> <td>0.00</td> <td>253</td> <td>85 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5320.00	93.90	52.50	41.40	82.42	33.05	11.54	33.11	0.00	253	85 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																								
1 5362.42	46.09	54.00	-7.91	34.38	33.00	11.75	33.12	0.00	253	85 AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																								
1 5320.00	93.90	52.50	41.40	82.42	33.05	11.54	33.11	0.00	253	85 AVERAGE																																																																								



Mode	28																																																																																																																																																																																	
	Harmonic																																																																																																																																																																																	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_26/8 RU_5320MHz																																																																																																																																																																																	
ANT	1																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																
Peak Avg	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91280-02114-240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 7093.00</td> <td>52.35</td> <td>68.20</td> <td>-15.85</td> <td>66.76</td> <td>36.59</td> <td>13.94</td> <td>65.85</td> <td>0.91</td> <td>137</td> <td>126</td> <td>Peak</td> </tr> <tr> <td>2 10640.00</td> <td>48.33</td> <td>74.00</td> <td>-25.67</td> <td>58.97</td> <td>39.18</td> <td>17.23</td> <td>67.31</td> <td>0.26</td> <td>139</td> <td>127</td> <td>PEAK</td> </tr> <tr> <td>3 10640.00</td> <td>40.24</td> <td>54.00</td> <td>-13.76</td> <td>50.88</td> <td>39.18</td> <td>17.23</td> <td>67.31</td> <td>0.26</td> <td>139</td> <td>127</td> <td>Average</td> </tr> <tr> <td>4 15960.00</td> <td>49.55</td> <td>74.00</td> <td>-24.45</td> <td>56.67</td> <td>37.76</td> <td>22.26</td> <td>67.50</td> <td>0.36</td> <td>151</td> <td>99</td> <td>PEAK</td> </tr> <tr> <td>5 15960.00</td> <td>40.24</td> <td>54.00</td> <td>-13.76</td> <td>47.36</td> <td>37.76</td> <td>22.26</td> <td>67.50</td> <td>0.36</td> <td>151</td> <td>99</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 7093.00	52.35	68.20	-15.85	66.76	36.59	13.94	65.85	0.91	137	126	Peak	2 10640.00	48.33	74.00	-25.67	58.97	39.18	17.23	67.31	0.26	139	127	PEAK	3 10640.00	40.24	54.00	-13.76	50.88	39.18	17.23	67.31	0.26	139	127	Average	4 15960.00	49.55	74.00	-24.45	56.67	37.76	22.26	67.50	0.36	151	99	PEAK	5 15960.00	40.24	54.00	-13.76	47.36	37.76	22.26	67.50	0.36	151	99	Average	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91280-02114-240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 7093.00</td> <td>52.04</td> <td>68.20</td> <td>-16.16</td> <td>66.45</td> <td>36.59</td> <td>13.94</td> <td>65.85</td> <td>0.91</td> <td>217</td> <td>189</td> <td>Peak</td> </tr> <tr> <td>2 10640.00</td> <td>48.24</td> <td>74.00</td> <td>-25.76</td> <td>58.88</td> <td>39.18</td> <td>17.23</td> <td>67.31</td> <td>0.26</td> <td>199</td> <td>217</td> <td>PEAK</td> </tr> <tr> <td>3 10640.00</td> <td>39.14</td> <td>54.00</td> <td>-14.86</td> <td>49.78</td> <td>39.18</td> <td>17.23</td> <td>67.31</td> <td>0.26</td> <td>199</td> <td>217</td> <td>Average</td> </tr> <tr> <td>4 15960.00</td> <td>49.57</td> <td>74.00</td> <td>-24.43</td> <td>56.69</td> <td>37.76</td> <td>22.26</td> <td>67.50</td> <td>0.36</td> <td>268</td> <td>169</td> <td>PEAK</td> </tr> <tr> <td>5 15960.00</td> <td>40.70</td> <td>54.00</td> <td>-13.30</td> <td>47.82</td> <td>37.76</td> <td>22.26</td> <td>67.50</td> <td>0.36</td> <td>268</td> <td>169</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 7093.00	52.04	68.20	-16.16	66.45	36.59	13.94	65.85	0.91	217	189	Peak	2 10640.00	48.24	74.00	-25.76	58.88	39.18	17.23	67.31	0.26	199	217	PEAK	3 10640.00	39.14	54.00	-14.86	49.78	39.18	17.23	67.31	0.26	199	217	Average	4 15960.00	49.57	74.00	-24.43	56.69	37.76	22.26	67.50	0.36	268	169	PEAK	5 15960.00	40.70	54.00	-13.30	47.82	37.76	22.26	67.50	0.36	268	169	Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																									
1 7093.00	52.35	68.20	-15.85	66.76	36.59	13.94	65.85	0.91	137	126	Peak																																																																																																																																																																							
2 10640.00	48.33	74.00	-25.67	58.97	39.18	17.23	67.31	0.26	139	127	PEAK																																																																																																																																																																							
3 10640.00	40.24	54.00	-13.76	50.88	39.18	17.23	67.31	0.26	139	127	Average																																																																																																																																																																							
4 15960.00	49.55	74.00	-24.45	56.67	37.76	22.26	67.50	0.36	151	99	PEAK																																																																																																																																																																							
5 15960.00	40.24	54.00	-13.76	47.36	37.76	22.26	67.50	0.36	151	99	Average																																																																																																																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																									
1 7093.00	52.04	68.20	-16.16	66.45	36.59	13.94	65.85	0.91	217	189	Peak																																																																																																																																																																							
2 10640.00	48.24	74.00	-25.76	58.88	39.18	17.23	67.31	0.26	199	217	PEAK																																																																																																																																																																							
3 10640.00	39.14	54.00	-14.86	49.78	39.18	17.23	67.31	0.26	199	217	Average																																																																																																																																																																							
4 15960.00	49.57	74.00	-24.43	56.69	37.76	22.26	67.50	0.36	268	169	PEAK																																																																																																																																																																							
5 15960.00	40.70	54.00	-13.30	47.82	37.76	22.26	67.50	0.36	268	169	Average																																																																																																																																																																							



Mode	28	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_26/8 RU_5320MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	<p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 HORIZONTAL</p>	<p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 VERTICAL</p>
	17.7G ~18G Avg	<p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 HORIZONTAL</p>



Mode	29																																																																			
	Band Edge																																																																			
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_52/40 RU_5320MHz																																																																			
ANT	1																																																																			
Pol.	Horizontal	Fundamental																																																																		
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5357.38</td> <td>53.69</td> <td>74.00</td> <td>-20.31</td> <td>42.00</td> <td>33.09</td> <td>11.72</td> <td>33.12</td> <td>0.00</td> <td>100</td> <td>63</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	1	5357.38	53.69	74.00	-20.31	42.00	33.09	11.72	33.12	0.00	100	63	PEAK	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>101.00</td> <td>-----</td> <td>-----</td> <td>89.52</td> <td>33.05</td> <td>11.54</td> <td>33.11</td> <td>0.00</td> <td>100</td> <td>63</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	1	5320.00	101.00	-----	-----	89.52	33.05	11.54	33.11	0.00	100	63	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg																																																									
1	5357.38	53.69	74.00	-20.31	42.00	33.09	11.72	33.12	0.00	100	63	PEAK																																																								
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg																																																									
1	5320.00	101.00	-----	-----	89.52	33.05	11.54	33.11	0.00	100	63	PEAK																																																								
Avg	<p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5407.22</td> <td>46.06</td> <td>54.00</td> <td>-7.94</td> <td>34.28</td> <td>33.00</td> <td>11.92</td> <td>33.14</td> <td>0.00</td> <td>100</td> <td>63</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	1	5407.22	46.06	54.00	-7.94	34.28	33.00	11.92	33.14	0.00	100	63	AVERAGE	<p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>94.06</td> <td>-----</td> <td>-----</td> <td>82.58</td> <td>33.05</td> <td>11.54</td> <td>33.11</td> <td>0.00</td> <td>100</td> <td>63</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	1	5320.00	94.06	-----	-----	82.58	33.05	11.54	33.11	0.00	100	63	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg																																																									
1	5407.22	46.06	54.00	-7.94	34.28	33.00	11.92	33.14	0.00	100	63	AVERAGE																																																								
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg																																																									
1	5320.00	94.06	-----	-----	82.58	33.05	11.54	33.11	0.00	100	63	AVERAGE																																																								







Mode	29																																																																							
	Band Edge																																																																							
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_52/40 RU_5320MHz																																																																							
ANT	1																																																																							
Pol.	Vertical	Fundamental																																																																						
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5392.94</td> <td>53.59</td> <td>74.00</td> <td>-20.41</td> <td>41.79</td> <td>33.01</td> <td>11.92</td> <td>33.13</td> <td>0.00</td> <td>285</td> <td>87 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5392.94	53.59	74.00	-20.41	41.79	33.01	11.92	33.13	0.00	285	87 PEAK	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>96.10</td> <td>-----</td> <td>-----</td> <td>84.62</td> <td>33.05</td> <td>11.54</td> <td>33.11</td> <td>0.00</td> <td>285</td> <td>87 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5320.00	96.10	-----	-----	84.62	33.05	11.54	33.11	0.00	285	87 PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																	
1 5392.94	53.59	74.00	-20.41	41.79	33.01	11.92	33.13	0.00	285	87 PEAK																																																														
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																	
1 5320.00	96.10	-----	-----	84.62	33.05	11.54	33.11	0.00	285	87 PEAK																																																														
Avg	<p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5423.32</td> <td>45.82</td> <td>54.00</td> <td>-8.18</td> <td>34.13</td> <td>33.00</td> <td>11.83</td> <td>33.14</td> <td>0.00</td> <td>285</td> <td>87 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5423.32	45.82	54.00	-8.18	34.13	33.00	11.83	33.14	0.00	285	87 AVERAGE	<p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>91.07</td> <td>-----</td> <td>-----</td> <td>79.59</td> <td>33.05</td> <td>11.54</td> <td>33.11</td> <td>0.00</td> <td>285</td> <td>87 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5320.00	91.07	-----	-----	79.59	33.05	11.54	33.11	0.00	285	87 AVERAGE
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																	
1 5423.32	45.82	54.00	-8.18	34.13	33.00	11.83	33.14	0.00	285	87 AVERAGE																																																														
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																	
1 5320.00	91.07	-----	-----	79.59	33.05	11.54	33.11	0.00	285	87 AVERAGE																																																														







Mode	29																																																																																																																																																													
	Harmonic																																																																																																																																																													
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_52/40 RU_5320MHz																																																																																																																																																													
ANT	1																																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																																												
Peak Avg	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7093.00</td> <td>52.47</td> <td>68.20</td> <td>-15.73</td> <td>66.91</td> <td>36.56</td> <td>13.94</td> <td>65.85</td> <td>0.91</td> <td>372</td> <td>287</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>46.42</td> <td>74.00</td> <td>-27.58</td> <td>57.06</td> <td>39.18</td> <td>17.23</td> <td>67.31</td> <td>0.26</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15960.00</td> <td>49.08</td> <td>74.00</td> <td>-24.92</td> <td>56.20</td> <td>37.76</td> <td>22.26</td> <td>67.50</td> <td>0.36</td> <td>198</td> <td>235</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>15960.00</td> <td>39.21</td> <td>54.00</td> <td>-14.79</td> <td>46.33</td> <td>37.76</td> <td>22.26</td> <td>67.50</td> <td>0.36</td> <td>198</td> <td>235</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7093.00	52.47	68.20	-15.73	66.91	36.56	13.94	65.85	0.91	372	287	Peak	2	10640.00	46.42	74.00	-27.58	57.06	39.18	17.23	67.31	0.26	--	--	PEAK	3	15960.00	49.08	74.00	-24.92	56.20	37.76	22.26	67.50	0.36	198	235	PEAK	4	15960.00	39.21	54.00	-14.79	46.33	37.76	22.26	67.50	0.36	198	235	Average	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7093.00</td> <td>52.73</td> <td>68.20</td> <td>-15.47</td> <td>67.17</td> <td>36.56</td> <td>13.94</td> <td>65.85</td> <td>0.91</td> <td>100</td> <td>264</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>46.66</td> <td>74.00</td> <td>-27.34</td> <td>57.30</td> <td>39.18</td> <td>17.23</td> <td>67.31</td> <td>0.26</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15960.00</td> <td>48.60</td> <td>74.00</td> <td>-25.40</td> <td>55.72</td> <td>37.76</td> <td>22.26</td> <td>67.50</td> <td>0.36</td> <td>101</td> <td>290</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>15960.00</td> <td>38.77</td> <td>54.00</td> <td>-15.23</td> <td>45.89</td> <td>37.76</td> <td>22.26</td> <td>67.50</td> <td>0.36</td> <td>101</td> <td>290</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7093.00	52.73	68.20	-15.47	67.17	36.56	13.94	65.85	0.91	100	264	Peak	2	10640.00	46.66	74.00	-27.34	57.30	39.18	17.23	67.31	0.26	--	--	PEAK	3	15960.00	48.60	74.00	-25.40	55.72	37.76	22.26	67.50	0.36	101	290	PEAK	4	15960.00	38.77	54.00	-15.23	45.89	37.76	22.26	67.50	0.36	101	290	Average
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																			
1	7093.00	52.47	68.20	-15.73	66.91	36.56	13.94	65.85	0.91	372	287	Peak																																																																																																																																																		
2	10640.00	46.42	74.00	-27.58	57.06	39.18	17.23	67.31	0.26	--	--	PEAK																																																																																																																																																		
3	15960.00	49.08	74.00	-24.92	56.20	37.76	22.26	67.50	0.36	198	235	PEAK																																																																																																																																																		
4	15960.00	39.21	54.00	-14.79	46.33	37.76	22.26	67.50	0.36	198	235	Average																																																																																																																																																		
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																			
1	7093.00	52.73	68.20	-15.47	67.17	36.56	13.94	65.85	0.91	100	264	Peak																																																																																																																																																		
2	10640.00	46.66	74.00	-27.34	57.30	39.18	17.23	67.31	0.26	--	--	PEAK																																																																																																																																																		
3	15960.00	48.60	74.00	-25.40	55.72	37.76	22.26	67.50	0.36	101	290	PEAK																																																																																																																																																		
4	15960.00	38.77	54.00	-15.23	45.89	37.76	22.26	67.50	0.36	101	290	Average																																																																																																																																																		

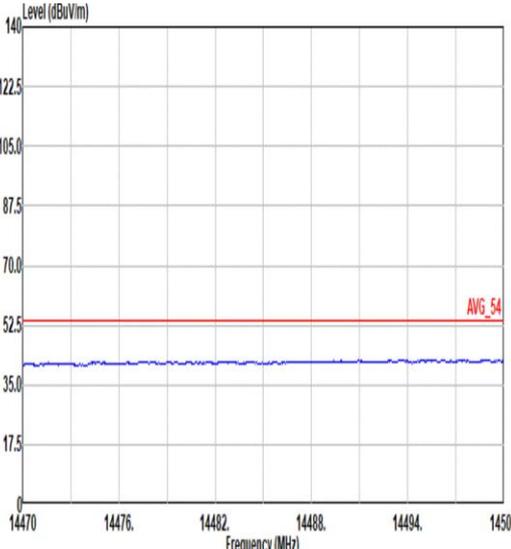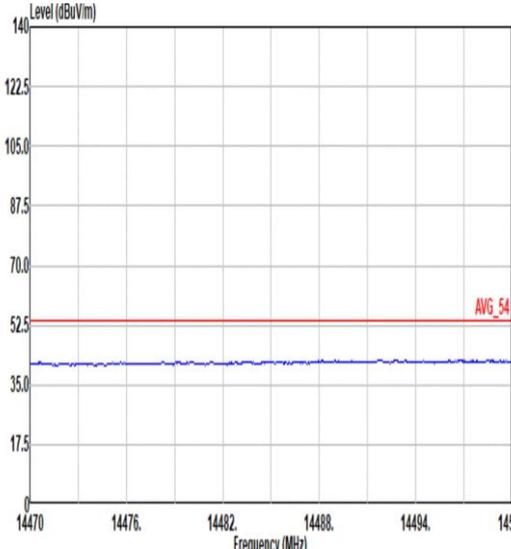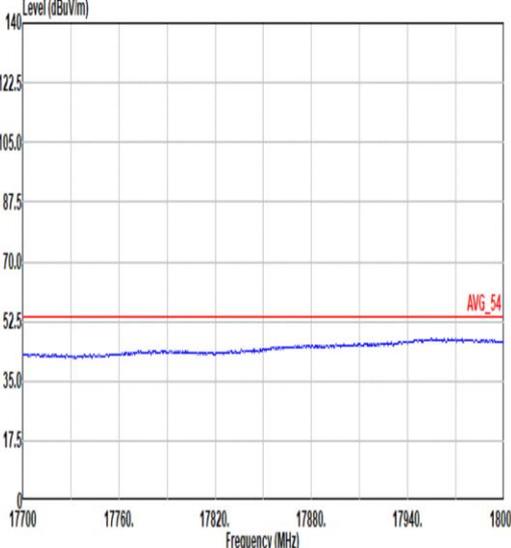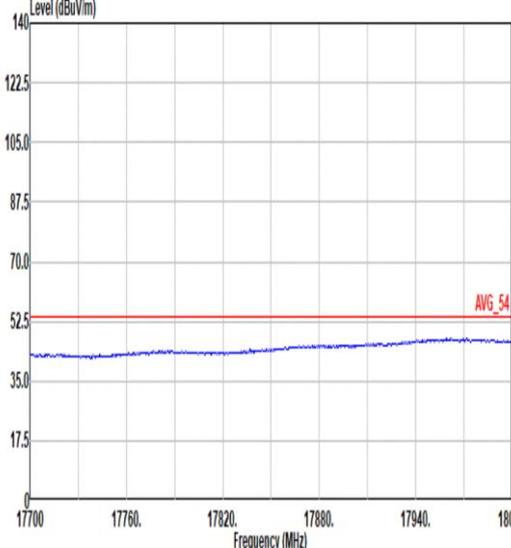

Mode	29	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_52/40 RU_5320MHz	
ANT	1	
Pol.	Horizontal	Vertical
<p><b>14.47G</b> ~14.5G Avg</p>	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 HORIZONTAL</p>	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 VERTICAL</p>
<p><b>17.7G</b> ~18G Avg</p>	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 HORIZONTAL</p>	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 VERTICAL</p>

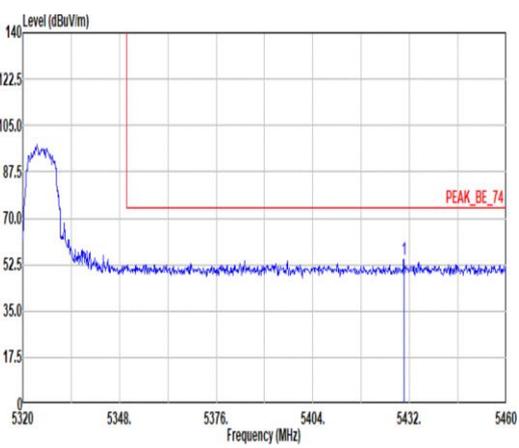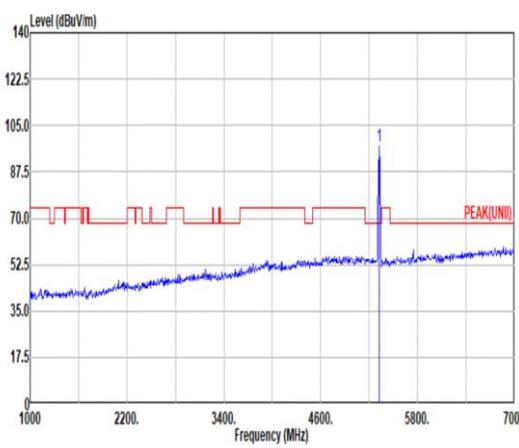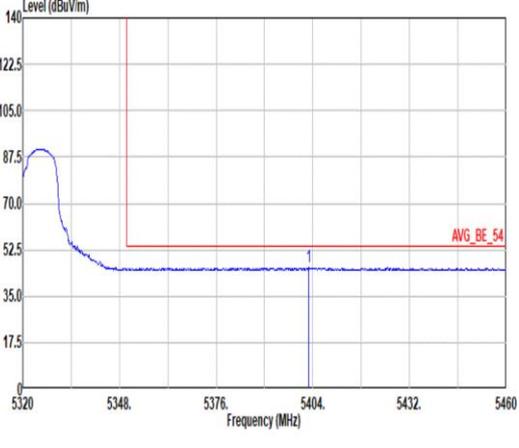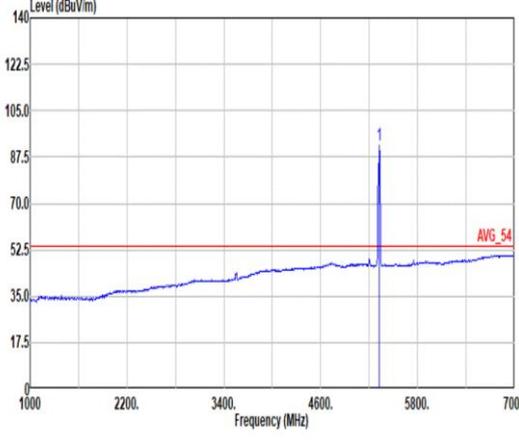

Mode	30																																																																									
	Band Edge																																																																									
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_106/54 RU_5320MHz																																																																									
ANT	1																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	 <p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5430.32</td> <td>54.26</td> <td>74.00</td> <td>-19.74</td> <td>42.62</td> <td>33.00</td> <td>11.79</td> <td>33.15</td> <td>0.00</td> <td>118</td> <td>64</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5430.32	54.26	74.00	-19.74	42.62	33.00	11.79	33.15	0.00	118	64	PEAK	 <p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>97.07</td> <td>-----</td> <td>-----</td> <td>85.59</td> <td>33.05</td> <td>11.54</td> <td>33.11</td> <td>0.00</td> <td>118</td> <td>64</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5320.00	97.07	-----	-----	85.59	33.05	11.54	33.11	0.00	118	64	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1 5430.32	54.26	74.00	-19.74	42.62	33.00	11.79	33.15	0.00	118	64	PEAK																																																															
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1 5320.00	97.07	-----	-----	85.59	33.05	11.54	33.11	0.00	118	64	PEAK																																																															
Avg	 <p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5402.74</td> <td>45.75</td> <td>54.00</td> <td>-8.25</td> <td>33.95</td> <td>33.00</td> <td>11.94</td> <td>33.14</td> <td>0.00</td> <td>118</td> <td>64</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5402.74	45.75	54.00	-8.25	33.95	33.00	11.94	33.14	0.00	118	64	AVERAGE	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>91.96</td> <td>-----</td> <td>-----</td> <td>80.48</td> <td>33.05</td> <td>11.54</td> <td>33.11</td> <td>0.00</td> <td>118</td> <td>64</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5320.00	91.96	-----	-----	80.48	33.05	11.54	33.11	0.00	118	64	AVERAGE
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1 5402.74	45.75	54.00	-8.25	33.95	33.00	11.94	33.14	0.00	118	64	AVERAGE																																																															
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1 5320.00	91.96	-----	-----	80.48	33.05	11.54	33.11	0.00	118	64	AVERAGE																																																															



Mode	30																																																																																	
	Band Edge																																																																																	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_106/54 RU_5320MHz																																																																																	
ANT	1																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5424.02</td> <td>53.90</td> <td>74.00</td> <td>-20.10</td> <td>42.21</td> <td>33.00</td> <td>11.83</td> <td>33.14</td> <td>0.00</td> <td>258</td> <td>85</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5424.02	53.90	74.00	-20.10	42.21	33.00	11.83	33.14	0.00	258	85	PEAK	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>95.49</td> <td>-----</td> <td>-----</td> <td>84.01</td> <td>33.05</td> <td>11.54</td> <td>33.11</td> <td>0.00</td> <td>258</td> <td>85</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5320.00	95.49	-----	-----	84.01	33.05	11.54	33.11	0.00	258	85	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5424.02	53.90	74.00	-20.10	42.21	33.00	11.83	33.14	0.00	258	85	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5320.00	95.49	-----	-----	84.01	33.05	11.54	33.11	0.00	258	85	PEAK																																																																						
Avg	<p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5378.10</td> <td>45.72</td> <td>54.00</td> <td>-8.28</td> <td>33.97</td> <td>33.04</td> <td>11.04</td> <td>33.13</td> <td>0.00</td> <td>258</td> <td>85</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5378.10	45.72	54.00	-8.28	33.97	33.04	11.04	33.13	0.00	258	85	AVERAGE	<p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>89.30</td> <td>-----</td> <td>-----</td> <td>77.62</td> <td>33.05</td> <td>11.54</td> <td>33.11</td> <td>0.00</td> <td>258</td> <td>85</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5320.00	89.30	-----	-----	77.62	33.05	11.54	33.11	0.00	258	85	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5378.10	45.72	54.00	-8.28	33.97	33.04	11.04	33.13	0.00	258	85	AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5320.00	89.30	-----	-----	77.62	33.05	11.54	33.11	0.00	258	85	AVERAGE																																																																						



Mode	30																																																																																																																																																
	Harmonic																																																																																																																																																
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_106/54 RU_5320MHz																																																																																																																																																
ANT	1																																																																																																																																																
Pol.	Horizontal	Vertical																																																																																																																																															
Peak Avg	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7093.00</td> <td>54.70</td> <td>68.20</td> <td>-13.50</td> <td>69.11</td> <td>36.59</td> <td>13.94</td> <td>65.85</td> <td>0.91</td> <td>258</td> <td>247</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>47.92</td> <td>74.00</td> <td>-26.08</td> <td>58.56</td> <td>39.18</td> <td>17.23</td> <td>67.31</td> <td>0.26</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15960.00</td> <td>50.42</td> <td>74.00</td> <td>-23.58</td> <td>57.54</td> <td>37.76</td> <td>22.26</td> <td>67.50</td> <td>0.36</td> <td>277</td> <td>187</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>15960.00</td> <td>41.37</td> <td>54.00</td> <td>-12.63</td> <td>48.49</td> <td>37.76</td> <td>22.26</td> <td>67.50</td> <td>0.36</td> <td>277</td> <td>187</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7093.00	54.70	68.20	-13.50	69.11	36.59	13.94	65.85	0.91	258	247	Peak	2	10640.00	47.92	74.00	-26.08	58.56	39.18	17.23	67.31	0.26	--	--	PEAK	3	15960.00	50.42	74.00	-23.58	57.54	37.76	22.26	67.50	0.36	277	187	PEAK	4	15960.00	41.37	54.00	-12.63	48.49	37.76	22.26	67.50	0.36	277	187	Average	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7093.00</td> <td>55.77</td> <td>68.20</td> <td>-12.43</td> <td>70.18</td> <td>36.59</td> <td>13.94</td> <td>65.85</td> <td>0.91</td> <td>111</td> <td>237</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>47.97</td> <td>74.00</td> <td>-26.03</td> <td>58.61</td> <td>39.18</td> <td>17.23</td> <td>67.31</td> <td>0.26</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15960.00</td> <td>47.99</td> <td>74.00</td> <td>-26.01</td> <td>55.13</td> <td>37.74</td> <td>22.26</td> <td>67.50</td> <td>0.36</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7093.00	55.77	68.20	-12.43	70.18	36.59	13.94	65.85	0.91	111	237	Peak	2	10640.00	47.97	74.00	-26.03	58.61	39.18	17.23	67.31	0.26	--	--	PEAK	3	15960.00	47.99	74.00	-26.01	55.13	37.74	22.26	67.50	0.36	--	--	Peak
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																						
1	7093.00	54.70	68.20	-13.50	69.11	36.59	13.94	65.85	0.91	258	247	Peak																																																																																																																																					
2	10640.00	47.92	74.00	-26.08	58.56	39.18	17.23	67.31	0.26	--	--	PEAK																																																																																																																																					
3	15960.00	50.42	74.00	-23.58	57.54	37.76	22.26	67.50	0.36	277	187	PEAK																																																																																																																																					
4	15960.00	41.37	54.00	-12.63	48.49	37.76	22.26	67.50	0.36	277	187	Average																																																																																																																																					
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																						
1	7093.00	55.77	68.20	-12.43	70.18	36.59	13.94	65.85	0.91	111	237	Peak																																																																																																																																					
2	10640.00	47.97	74.00	-26.03	58.61	39.18	17.23	67.31	0.26	--	--	PEAK																																																																																																																																					
3	15960.00	47.99	74.00	-26.01	55.13	37.74	22.26	67.50	0.36	--	--	Peak																																																																																																																																					



Mode	30	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_106/54 RU_5320MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	<p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 HORIZONTAL</p>	<p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 VERTICAL</p>
	17.7G ~18G Avg	<p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 HORIZONTAL</p>



Mode	31																																																																																							
	Band Edge																																																																																							
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																							
ANT	1																																																																																							
Pol.	Horizontal	Fundamental																																																																																						
	<div data-bbox="207 593 845 1265"> <p>Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5455.00</td> <td>53.77</td> <td>74.00</td> <td>-20.23</td> <td>42.25</td> <td>33.02</td> <td>11.65</td> <td>33.15</td> <td>0.00</td> <td>115</td> <td>66</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5467.00</td> <td>54.21</td> <td>68.20</td> <td>-13.99</td> <td>42.72</td> <td>33.07</td> <td>11.58</td> <td>33.16</td> <td>0.00</td> <td>115</td> <td>66</td> <td>PEAK</td> </tr> </tbody> </table> </div>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5455.00	53.77	74.00	-20.23	42.25	33.02	11.65	33.15	0.00	115	66	PEAK	2	5467.00	54.21	68.20	-13.99	42.72	33.07	11.58	33.16	0.00	115	66	PEAK	<div data-bbox="861 593 1484 1265"> <p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>98.06</td> <td>-----</td> <td>-----</td> <td>86.63</td> <td>33.20</td> <td>11.40</td> <td>33.17</td> <td>0.00</td> <td>115</td> <td>66</td> <td>PEAK</td> </tr> </tbody> </table> </div>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5500.00	98.06	-----	-----	86.63	33.20	11.40	33.17	0.00	115	66
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																	
1	5455.00	53.77	74.00	-20.23	42.25	33.02	11.65	33.15	0.00	115	66	PEAK																																																																												
2	5467.00	54.21	68.20	-13.99	42.72	33.07	11.58	33.16	0.00	115	66	PEAK																																																																												
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																	
1	5500.00	98.06	-----	-----	86.63	33.20	11.40	33.17	0.00	115	66	PEAK																																																																												
Avg	<div data-bbox="207 1276 845 1937"> <p>Site : 03CH12-HY Condition: AVG_BE(UNII)_B3 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5425.00</td> <td>46.46</td> <td>54.00</td> <td>-7.54</td> <td>34.78</td> <td>33.00</td> <td>11.82</td> <td>33.14</td> <td>0.00</td> <td>115</td> <td>66</td> <td>AVERAGE</td> </tr> </tbody> </table> </div>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5425.00	46.46	54.00	-7.54	34.78	33.00	11.82	33.14	0.00	115	66	AVERAGE	<div data-bbox="861 1276 1484 1937"> <p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>93.54</td> <td>-----</td> <td>-----</td> <td>82.11</td> <td>33.20</td> <td>11.40</td> <td>33.17</td> <td>0.00</td> <td>115</td> <td>66</td> <td>AVERAGE</td> </tr> </tbody> </table> </div>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5500.00	93.54	-----	-----	82.11	33.20	11.40	33.17	0.00	115	66	AVERAGE												
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																	
1	5425.00	46.46	54.00	-7.54	34.78	33.00	11.82	33.14	0.00	115	66	AVERAGE																																																																												
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																	
1	5500.00	93.54	-----	-----	82.11	33.20	11.40	33.17	0.00	115	66	AVERAGE																																																																												



Mode	31																																																																																																						
	Band Edge																																																																																																						
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																																						
ANT	1																																																																																																						
Pol.	Vertical	Fundamental																																																																																																					
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5452.15</td> <td>53.72</td> <td>74.00</td> <td>-20.28</td> <td>42.19</td> <td>33.01</td> <td>11.67</td> <td>33.15</td> <td>0.00</td> <td>238</td> <td>76</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5464.45</td> <td>53.78</td> <td>68.20</td> <td>-14.42</td> <td>42.28</td> <td>33.06</td> <td>11.60</td> <td>33.16</td> <td>0.00</td> <td>238</td> <td>76</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5452.15	53.72	74.00	-20.28	42.19	33.01	11.67	33.15	0.00	238	76	PEAK	2	5464.45	53.78	68.20	-14.42	42.28	33.06	11.60	33.16	0.00	238	76	PEAK	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>95.00</td> <td>-----</td> <td>-----</td> <td>83.64</td> <td>33.18</td> <td>11.43</td> <td>33.17</td> <td>0.00</td> <td>238</td> <td>76</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5500.00	95.00	-----	-----	83.64	33.18	11.43	33.17	0.00	238	76	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																													
1	5452.15	53.72	74.00	-20.28	42.19	33.01	11.67	33.15	0.00	238	76	PEAK																																																																																											
2	5464.45	53.78	68.20	-14.42	42.28	33.06	11.60	33.16	0.00	238	76	PEAK																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																													
1	5500.00	95.00	-----	-----	83.64	33.18	11.43	33.17	0.00	238	76	PEAK																																																																																											
Avg	<p>Site : 03CH12-HY Condition: AVG_BE(UNII)_B3 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5369.20</td> <td>46.36</td> <td>54.00</td> <td>-7.64</td> <td>34.64</td> <td>33.06</td> <td>11.79</td> <td>33.13</td> <td>0.00</td> <td>238</td> <td>76</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5369.20	46.36	54.00	-7.64	34.64	33.06	11.79	33.13	0.00	238	76	AVERAGE	<p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>90.17</td> <td>-----</td> <td>-----</td> <td>78.74</td> <td>33.20</td> <td>11.40</td> <td>33.17</td> <td>0.00</td> <td>238</td> <td>76</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5500.00	90.17	-----	-----	78.74	33.20	11.40	33.17	0.00	238	76	AVERAGE													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																													
1	5369.20	46.36	54.00	-7.64	34.64	33.06	11.79	33.13	0.00	238	76	AVERAGE																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																													
1	5500.00	90.17	-----	-----	78.74	33.20	11.40	33.17	0.00	238	76	AVERAGE																																																																																											







Mode	31																																																																																																																																																																																									
	Harmonic																																																																																																																																																																																									
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																																																																																																																									
ANT	1																																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																																								
Peak Avg	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7333.00</td> <td>54.28</td> <td>74.00</td> <td>-19.72</td> <td>68.17</td> <td>37.00</td> <td>14.32</td> <td>66.05</td> <td>0.84</td> <td>400</td> <td>304</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7333.00</td> <td>52.06</td> <td>54.00</td> <td>-1.94</td> <td>65.95</td> <td>37.00</td> <td>14.32</td> <td>66.05</td> <td>0.84</td> <td>400</td> <td>304</td> <td>Average</td> </tr> <tr> <td>3</td> <td>11000.00</td> <td>48.71</td> <td>74.00</td> <td>-25.29</td> <td>59.14</td> <td>38.90</td> <td>17.39</td> <td>67.00</td> <td>0.28</td> <td>177</td> <td>311</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>11000.00</td> <td>39.71</td> <td>74.00</td> <td>-34.29</td> <td>50.14</td> <td>38.90</td> <td>17.39</td> <td>67.00</td> <td>0.28</td> <td>177</td> <td>311</td> <td>Average</td> </tr> <tr> <td>5</td> <td>16500.00</td> <td>51.34</td> <td>68.20</td> <td>-16.86</td> <td>56.51</td> <td>38.70</td> <td>22.53</td> <td>66.83</td> <td>0.43</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	7333.00	54.28	74.00	-19.72	68.17	37.00	14.32	66.05	0.84	400	304	Peak	2	7333.00	52.06	54.00	-1.94	65.95	37.00	14.32	66.05	0.84	400	304	Average	3	11000.00	48.71	74.00	-25.29	59.14	38.90	17.39	67.00	0.28	177	311	PEAK	4	11000.00	39.71	74.00	-34.29	50.14	38.90	17.39	67.00	0.28	177	311	Average	5	16500.00	51.34	68.20	-16.86	56.51	38.70	22.53	66.83	0.43	--	--	PEAK	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7333.00</td> <td>52.31</td> <td>74.00</td> <td>-21.69</td> <td>66.28</td> <td>37.00</td> <td>14.32</td> <td>66.05</td> <td>0.84</td> <td>100</td> <td>273</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7333.00</td> <td>49.64</td> <td>54.00</td> <td>-4.36</td> <td>63.53</td> <td>37.00</td> <td>14.32</td> <td>66.05</td> <td>0.84</td> <td>100</td> <td>273</td> <td>Average</td> </tr> <tr> <td>3</td> <td>11000.00</td> <td>48.33</td> <td>74.00</td> <td>-25.67</td> <td>58.76</td> <td>38.90</td> <td>17.39</td> <td>67.00</td> <td>0.28</td> <td>288</td> <td>148</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>11000.00</td> <td>38.74</td> <td>54.00</td> <td>-15.26</td> <td>49.17</td> <td>38.90</td> <td>17.39</td> <td>67.00</td> <td>0.28</td> <td>288</td> <td>148</td> <td>Average</td> </tr> <tr> <td>5</td> <td>16500.00</td> <td>51.39</td> <td>68.20</td> <td>-16.81</td> <td>56.56</td> <td>38.70</td> <td>22.53</td> <td>66.83</td> <td>0.43</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	7333.00	52.31	74.00	-21.69	66.28	37.00	14.32	66.05	0.84	100	273	Peak	2	7333.00	49.64	54.00	-4.36	63.53	37.00	14.32	66.05	0.84	100	273	Average	3	11000.00	48.33	74.00	-25.67	58.76	38.90	17.39	67.00	0.28	288	148	PEAK	4	11000.00	38.74	54.00	-15.26	49.17	38.90	17.39	67.00	0.28	288	148	Average	5	16500.00	51.39	68.20	-16.81	56.56	38.70	22.53	66.83	0.43	--	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																		
1	7333.00	54.28	74.00	-19.72	68.17	37.00	14.32	66.05	0.84	400	304	Peak																																																																																																																																																																														
2	7333.00	52.06	54.00	-1.94	65.95	37.00	14.32	66.05	0.84	400	304	Average																																																																																																																																																																														
3	11000.00	48.71	74.00	-25.29	59.14	38.90	17.39	67.00	0.28	177	311	PEAK																																																																																																																																																																														
4	11000.00	39.71	74.00	-34.29	50.14	38.90	17.39	67.00	0.28	177	311	Average																																																																																																																																																																														
5	16500.00	51.34	68.20	-16.86	56.51	38.70	22.53	66.83	0.43	--	--	PEAK																																																																																																																																																																														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																		
1	7333.00	52.31	74.00	-21.69	66.28	37.00	14.32	66.05	0.84	100	273	Peak																																																																																																																																																																														
2	7333.00	49.64	54.00	-4.36	63.53	37.00	14.32	66.05	0.84	100	273	Average																																																																																																																																																																														
3	11000.00	48.33	74.00	-25.67	58.76	38.90	17.39	67.00	0.28	288	148	PEAK																																																																																																																																																																														
4	11000.00	38.74	54.00	-15.26	49.17	38.90	17.39	67.00	0.28	288	148	Average																																																																																																																																																																														
5	16500.00	51.39	68.20	-16.81	56.56	38.70	22.53	66.83	0.43	--	--	PEAK																																																																																																																																																																														



Mode	31	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	<p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 HORIZONTAL</p>	<p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 VERTICAL</p>
	17.7G ~18G Avg	<p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 HORIZONTAL</p>

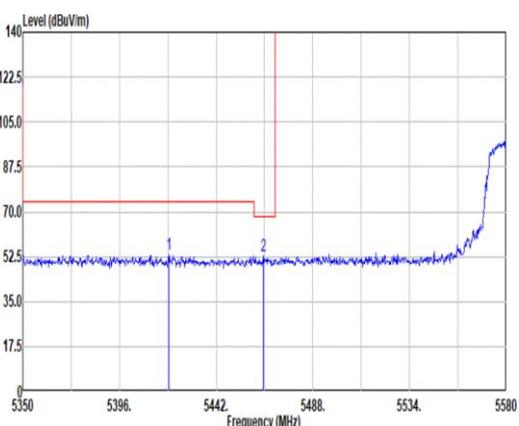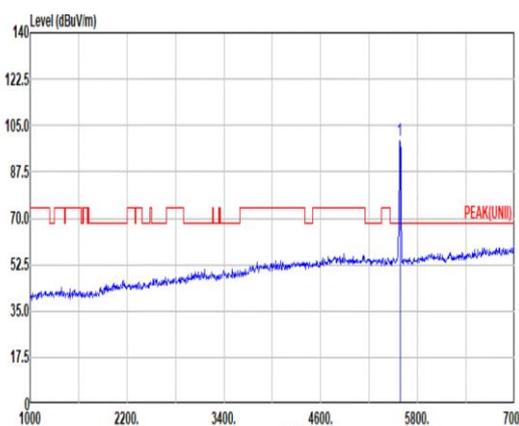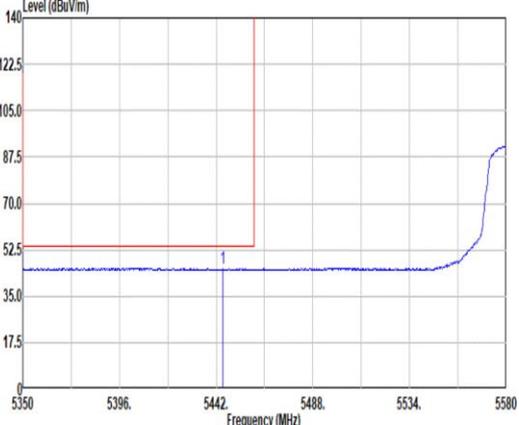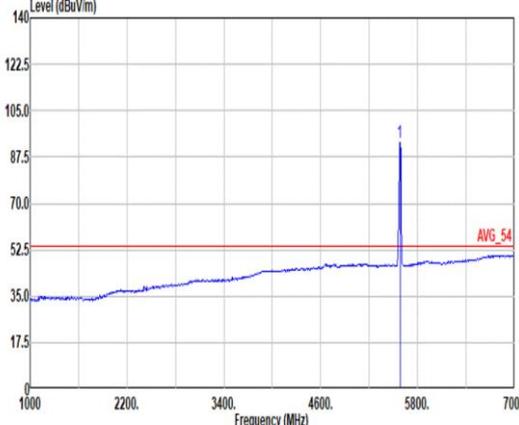

Mode	32																																																																																																				
	Band Edge - L																																																																																																				
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Horizontal	Fundamental																																																																																																			
Peak	 <p>Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5419.46</td> <td>53.21</td> <td>74.00</td> <td>-20.79</td> <td>41.50</td> <td>33.00</td> <td>11.85</td> <td>33.14</td> <td>0.00</td> <td>120</td> <td>66</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5464.31</td> <td>53.07</td> <td>68.20</td> <td>-15.13</td> <td>41.57</td> <td>33.06</td> <td>11.60</td> <td>33.16</td> <td>0.00</td> <td>120</td> <td>66</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5419.46	53.21	74.00	-20.79	41.50	33.00	11.85	33.14	0.00	120	66	PEAK	2	5464.31	53.07	68.20	-15.13	41.57	33.06	11.60	33.16	0.00	120	66	PEAK	 <p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>99.07</td> <td>-----</td> <td>-----</td> <td>87.94</td> <td>33.10</td> <td>11.28</td> <td>33.25</td> <td>0.00</td> <td>120</td> <td>66</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5580.00	99.07	-----	-----	87.94	33.10	11.28	33.25	0.00	120	66	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																												
1	5419.46	53.21	74.00	-20.79	41.50	33.00	11.85	33.14	0.00	120	66	PEAK																																																																																									
2	5464.31	53.07	68.20	-15.13	41.57	33.06	11.60	33.16	0.00	120	66	PEAK																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																												
1	5580.00	99.07	-----	-----	87.94	33.10	11.28	33.25	0.00	120	66	PEAK																																																																																									
Avg	 <p>Site : 03CH12-HY Condition: AVG_BE(UNII)_B3 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5445.22</td> <td>45.66</td> <td>54.00</td> <td>-8.34</td> <td>34.10</td> <td>33.00</td> <td>11.71</td> <td>33.15</td> <td>0.00</td> <td>120</td> <td>66</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5445.22	45.66	54.00	-8.34	34.10	33.00	11.71	33.15	0.00	120	66	AVERAGE	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>92.90</td> <td>-----</td> <td>-----</td> <td>81.77</td> <td>33.10</td> <td>11.28</td> <td>33.25</td> <td>0.00</td> <td>120</td> <td>66</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5580.00	92.90	-----	-----	81.77	33.10	11.28	33.25	0.00	120	66	AVERAGE													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																												
1	5445.22	45.66	54.00	-8.34	34.10	33.00	11.71	33.15	0.00	120	66	AVERAGE																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																												
1	5580.00	92.90	-----	-----	81.77	33.10	11.28	33.25	0.00	120	66	AVERAGE																																																																																									



Mode	32																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																								
ANT	1																																								
Pol.	Horizontal	Fundamental																																							
Peak	<p>Site : 03CH12-HY          Condition: PEAK_BE(UNII)_B3 3m 91200-02114-240711 HORIZONTAL          : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5755.38</td> <td>54.47</td> <td>68.20</td> <td>-13.73</td> <td>42.90</td> <td>33.82</td> <td>11.18</td> <td>33.43</td> <td>0.00</td> <td>120</td> <td>66 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5755.38	54.47	68.20	-13.73	42.90	33.82	11.18	33.43	0.00	120	66 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5755.38	54.47	68.20	-13.73	42.90	33.82	11.18	33.43	0.00	120	66 PEAK																															



Mode	32																																																																																
	Band Edge - L																																																																																
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																
ANT	1																																																																																
Pol.	Vertical	Fundamental																																																																															
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5367.48</td> <td>53.75</td> <td>74.00</td> <td>-20.25</td> <td>42.02</td> <td>33.07</td> <td>11.78</td> <td>33.12</td> <td>0.00</td> <td>278</td> <td>85</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.14</td> <td>54.29</td> <td>68.20</td> <td>-13.91</td> <td>42.00</td> <td>33.08</td> <td>11.57</td> <td>33.16</td> <td>0.00</td> <td>278</td> <td>85</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	dB	cm	deg	1	5367.48	53.75	74.00	-20.25	42.02	33.07	11.78	33.12	0.00	278	85	PEAK	2	5469.14	54.29	68.20	-13.91	42.00	33.08	11.57	33.16	0.00	278	85	PEAK	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>96.60</td> <td>-----</td> <td>-----</td> <td>85.47</td> <td>33.10</td> <td>11.28</td> <td>33.25</td> <td>0.00</td> <td>278</td> <td>85</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	dB	cm	deg	1	5580.00	96.60	-----	-----	85.47	33.10	11.28	33.25	0.00	278	85	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	dB	cm	deg																																																																								
1	5367.48	53.75	74.00	-20.25	42.02	33.07	11.78	33.12	0.00	278	85	PEAK																																																																					
2	5469.14	54.29	68.20	-13.91	42.00	33.08	11.57	33.16	0.00	278	85	PEAK																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	dB	cm	deg																																																																								
1	5580.00	96.60	-----	-----	85.47	33.10	11.28	33.25	0.00	278	85	PEAK																																																																					
Avg	<p>Site : 03CH12-HY Condition: AVG_BE(UNII)_B3 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5360.50</td> <td>45.77</td> <td>54.00</td> <td>-8.23</td> <td>34.07</td> <td>33.00</td> <td>11.74</td> <td>33.12</td> <td>0.00</td> <td>278</td> <td>85</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	dB	cm	deg	1	5360.50	45.77	54.00	-8.23	34.07	33.00	11.74	33.12	0.00	278	85	AVERAGE	<p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>90.00</td> <td>-----</td> <td>-----</td> <td>78.07</td> <td>33.10</td> <td>11.28</td> <td>33.25</td> <td>0.00</td> <td>278</td> <td>85</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	dB	cm	deg	1	5580.00	90.00	-----	-----	78.07	33.10	11.28	33.25	0.00	278	85	AVERAGE													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	dB	cm	deg																																																																								
1	5360.50	45.77	54.00	-8.23	34.07	33.00	11.74	33.12	0.00	278	85	AVERAGE																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	dB	cm	deg																																																																								
1	5580.00	90.00	-----	-----	78.07	33.10	11.28	33.25	0.00	278	85	AVERAGE																																																																					







Mode	32																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																								
ANT	1																																								
Pol.	Vertical	Fundamental																																							
Peak	<p>Site : 03CH12-HY          Condition: PEAK_BE(UNII)_B3 3m 91200-02114-240711 VERTICAL          : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5749.28</td> <td>54.85</td> <td>68.20</td> <td>-13.35</td> <td>43.29</td> <td>33.80</td> <td>11.18</td> <td>33.42</td> <td>0.00</td> <td>278</td> <td>85 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5749.28	54.85	68.20	-13.35	43.29	33.80	11.18	33.42	0.00	278	85 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5749.28	54.85	68.20	-13.35	43.29	33.80	11.18	33.42	0.00	278	85 PEAK																															



Mode	32																																																																																																																																																																														
	Harmonic																																																																																																																																																																														
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																																																																																																														
ANT	1																																																																																																																																																																														
Pol.	Horizontal	Vertical																																																																																																																																																																													
Peak Avg	<p>Site : 03CH12-HY Condition: PEAK(UINII) 3m 91200-02114-240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7440.00</td> <td>53.04</td> <td>74.00</td> <td>-20.96</td> <td>67.25</td> <td>36.68</td> <td>14.49</td> <td>66.14</td> <td>0.76</td> <td>177</td> <td>104</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>50.71</td> <td>54.00</td> <td>-3.29</td> <td>64.92</td> <td>36.68</td> <td>14.49</td> <td>66.14</td> <td>0.76</td> <td>177</td> <td>104</td> <td>Average</td> </tr> <tr> <td>3</td> <td>11160.00</td> <td>47.93</td> <td>74.00</td> <td>-26.07</td> <td>57.89</td> <td>38.90</td> <td>17.71</td> <td>66.85</td> <td>0.28</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>16740.00</td> <td>51.70</td> <td>68.20</td> <td>-16.50</td> <td>57.28</td> <td>38.12</td> <td>22.63</td> <td>66.79</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7440.00	53.04	74.00	-20.96	67.25	36.68	14.49	66.14	0.76	177	104	Peak	2	7440.00	50.71	54.00	-3.29	64.92	36.68	14.49	66.14	0.76	177	104	Average	3	11160.00	47.93	74.00	-26.07	57.89	38.90	17.71	66.85	0.28	--	--	PEAK	4	16740.00	51.70	68.20	-16.50	57.28	38.12	22.63	66.79	0.46	--	--	PEAK	<p>Site : 03CH12-HY Condition: PEAK(UINII) 3m 91200-02114-240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7440.00</td> <td>53.01</td> <td>74.00</td> <td>-20.99</td> <td>67.22</td> <td>36.68</td> <td>14.49</td> <td>66.14</td> <td>0.76</td> <td>100</td> <td>270</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>50.50</td> <td>54.00</td> <td>-3.50</td> <td>64.71</td> <td>36.68</td> <td>14.49</td> <td>66.14</td> <td>0.76</td> <td>100</td> <td>270</td> <td>Average</td> </tr> <tr> <td>3</td> <td>11160.00</td> <td>48.25</td> <td>74.00</td> <td>-25.75</td> <td>58.21</td> <td>38.90</td> <td>17.71</td> <td>66.85</td> <td>0.28</td> <td>140</td> <td>102</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>11160.00</td> <td>39.25</td> <td>54.00</td> <td>-14.75</td> <td>49.21</td> <td>38.90</td> <td>17.71</td> <td>66.85</td> <td>0.28</td> <td>140</td> <td>102</td> <td>Average</td> </tr> <tr> <td>5</td> <td>16740.00</td> <td>50.71</td> <td>68.20</td> <td>-17.49</td> <td>56.29</td> <td>38.12</td> <td>22.63</td> <td>66.79</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7440.00	53.01	74.00	-20.99	67.22	36.68	14.49	66.14	0.76	100	270	Peak	2	7440.00	50.50	54.00	-3.50	64.71	36.68	14.49	66.14	0.76	100	270	Average	3	11160.00	48.25	74.00	-25.75	58.21	38.90	17.71	66.85	0.28	140	102	PEAK	4	11160.00	39.25	54.00	-14.75	49.21	38.90	17.71	66.85	0.28	140	102	Average	5	16740.00	50.71	68.20	-17.49	56.29	38.12	22.63	66.79	0.46	--	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																						
1	7440.00	53.04	74.00	-20.96	67.25	36.68	14.49	66.14	0.76	177	104	Peak																																																																																																																																																																			
2	7440.00	50.71	54.00	-3.29	64.92	36.68	14.49	66.14	0.76	177	104	Average																																																																																																																																																																			
3	11160.00	47.93	74.00	-26.07	57.89	38.90	17.71	66.85	0.28	--	--	PEAK																																																																																																																																																																			
4	16740.00	51.70	68.20	-16.50	57.28	38.12	22.63	66.79	0.46	--	--	PEAK																																																																																																																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																						
1	7440.00	53.01	74.00	-20.99	67.22	36.68	14.49	66.14	0.76	100	270	Peak																																																																																																																																																																			
2	7440.00	50.50	54.00	-3.50	64.71	36.68	14.49	66.14	0.76	100	270	Average																																																																																																																																																																			
3	11160.00	48.25	74.00	-25.75	58.21	38.90	17.71	66.85	0.28	140	102	PEAK																																																																																																																																																																			
4	11160.00	39.25	54.00	-14.75	49.21	38.90	17.71	66.85	0.28	140	102	Average																																																																																																																																																																			
5	16740.00	50.71	68.20	-17.49	56.29	38.12	22.63	66.79	0.46	--	--	PEAK																																																																																																																																																																			

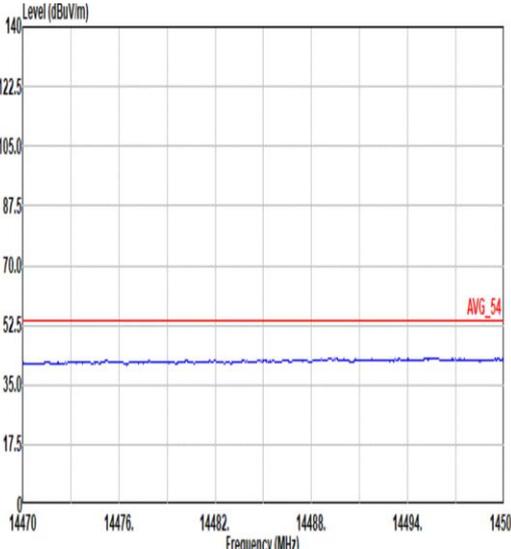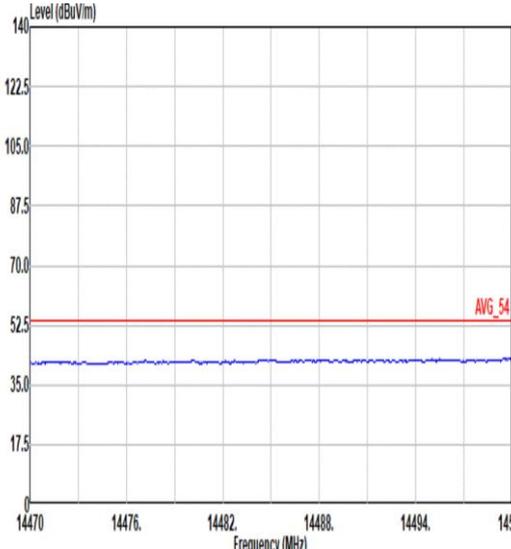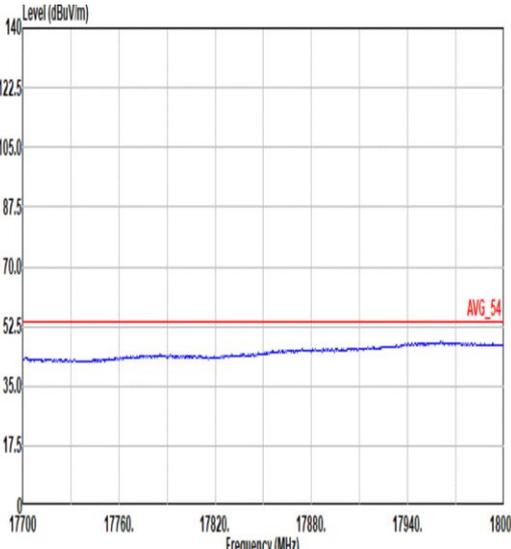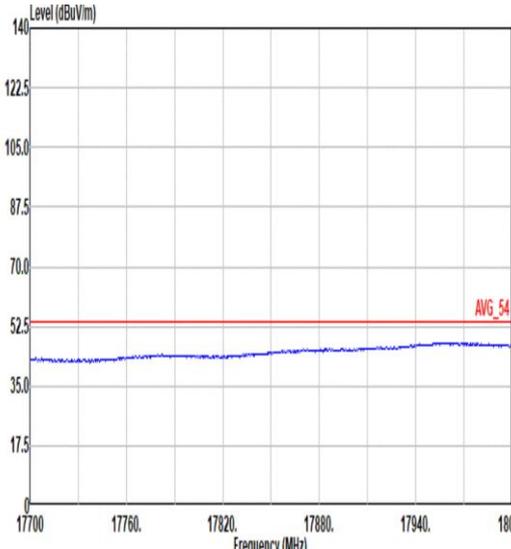

<b>Mode</b>	32	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz	
<b>ANT</b>	1	
<b>Pol.</b>	<b>Horizontal</b>	<b>Vertical</b>
<b>14.47G</b> <b>~14.5G</b> <b>Avg</b>	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 HORIZONTAL</p>	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 VERTICAL</p>
<b>17.7G</b> <b>~18G</b> <b>Avg</b>	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 HORIZONTAL</p>	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 VERTICAL</p>



Mode	33																																																																															
	Band Edge																																																																															
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5727.76</td> <td>55.31</td> <td>68.20</td> <td>-12.89</td> <td>43.81</td> <td>33.71</td> <td>11.19</td> <td>33.40</td> <td>0.00</td> <td>300</td> <td>73 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5727.76	55.31	68.20	-12.89	43.81	33.71	11.19	33.40	0.00	300	73 PEAK	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>96.20</td> <td>-----</td> <td>-----</td> <td>84.75</td> <td>33.62</td> <td>11.20</td> <td>33.37</td> <td>0.00</td> <td>300</td> <td>73 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5700.00	96.20	-----	-----	84.75	33.62	11.20	33.37	0.00	300	73 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5727.76	55.31	68.20	-12.89	43.81	33.71	11.19	33.40	0.00	300	73 PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5700.00	96.20	-----	-----	84.75	33.62	11.20	33.37	0.00	300	73 PEAK																																																																						
Avg	Blank	<p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>89.63</td> <td>-----</td> <td>-----</td> <td>78.22</td> <td>33.58</td> <td>11.20</td> <td>33.37</td> <td>0.00</td> <td>300</td> <td>73 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5700.00	89.63	-----	-----	78.22	33.58	11.20	33.37	0.00	300	73 AVERAGE																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5700.00	89.63	-----	-----	78.22	33.58	11.20	33.37	0.00	300	73 AVERAGE																																																																						







Mode	33																																																																													
	Band Edge																																																																													
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																													
ANT	1																																																																													
Pol.	Vertical	Fundamental																																																																												
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5738.55</td> <td>56.91</td> <td>68.20</td> <td>-11.29</td> <td>45.39</td> <td>33.75</td> <td>11.18</td> <td>33.41</td> <td>0.00</td> <td>299</td> <td>83 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5738.55	56.91	68.20	-11.29	45.39	33.75	11.18	33.41	0.00	299	83 PEAK	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>94.76</td> <td>-----</td> <td>-----</td> <td>83.31</td> <td>33.62</td> <td>11.20</td> <td>33.37</td> <td>0.00</td> <td>299</td> <td>83 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5700.00	94.76	-----	-----	83.31	33.62	11.20	33.37	0.00	299	83 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																						
1 5738.55	56.91	68.20	-11.29	45.39	33.75	11.18	33.41	0.00	299	83 PEAK																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																						
1 5700.00	94.76	-----	-----	83.31	33.62	11.20	33.37	0.00	299	83 PEAK																																																																				
Avg	Blank	<p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>87.44</td> <td>-----</td> <td>-----</td> <td>75.99</td> <td>33.62</td> <td>11.20</td> <td>33.37</td> <td>0.00</td> <td>299</td> <td>83 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5700.00	87.44	-----	-----	75.99	33.62	11.20	33.37	0.00	299	83 AVERAGE																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																						
1 5700.00	87.44	-----	-----	75.99	33.62	11.20	33.37	0.00	299	83 AVERAGE																																																																				



Mode	33																																																																																																																																																																																									
	Harmonic																																																																																																																																																																																									
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																																																																																																																									
ANT	1																																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																																								
Peak Avg	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7600.00</td> <td>49.33</td> <td>74.00</td> <td>-24.67</td> <td>64.12</td> <td>36.40</td> <td>14.51</td> <td>66.24</td> <td>0.54</td> <td>104</td> <td>92</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7600.00</td> <td>46.58</td> <td>54.00</td> <td>-7.42</td> <td>61.37</td> <td>36.40</td> <td>14.51</td> <td>66.24</td> <td>0.54</td> <td>104</td> <td>92</td> <td>Average</td> </tr> <tr> <td>3</td> <td>11400.00</td> <td>49.77</td> <td>74.00</td> <td>-24.23</td> <td>58.71</td> <td>39.20</td> <td>18.19</td> <td>66.62</td> <td>0.29</td> <td>221</td> <td>128</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>11400.00</td> <td>40.27</td> <td>54.00</td> <td>-13.73</td> <td>49.21</td> <td>39.20</td> <td>18.19</td> <td>66.62</td> <td>0.29</td> <td>221</td> <td>128</td> <td>Average</td> </tr> <tr> <td>5</td> <td>17100.00</td> <td>51.15</td> <td>68.20</td> <td>-17.05</td> <td>56.76</td> <td>38.00</td> <td>22.84</td> <td>66.96</td> <td>0.51</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	7600.00	49.33	74.00	-24.67	64.12	36.40	14.51	66.24	0.54	104	92	Peak	2	7600.00	46.58	54.00	-7.42	61.37	36.40	14.51	66.24	0.54	104	92	Average	3	11400.00	49.77	74.00	-24.23	58.71	39.20	18.19	66.62	0.29	221	128	PEAK	4	11400.00	40.27	54.00	-13.73	49.21	39.20	18.19	66.62	0.29	221	128	Average	5	17100.00	51.15	68.20	-17.05	56.76	38.00	22.84	66.96	0.51	--	--	PEAK	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7600.00</td> <td>48.42</td> <td>74.00</td> <td>-25.58</td> <td>63.21</td> <td>36.40</td> <td>14.51</td> <td>66.24</td> <td>0.54</td> <td>100</td> <td>185</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7600.00</td> <td>45.62</td> <td>54.00</td> <td>-8.38</td> <td>60.41</td> <td>36.40</td> <td>14.51</td> <td>66.24</td> <td>0.54</td> <td>100</td> <td>185</td> <td>Average</td> </tr> <tr> <td>3</td> <td>11400.00</td> <td>49.74</td> <td>74.00</td> <td>-24.26</td> <td>58.68</td> <td>39.20</td> <td>18.19</td> <td>66.62</td> <td>0.29</td> <td>138</td> <td>14</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>11400.00</td> <td>40.60</td> <td>54.00</td> <td>-13.40</td> <td>49.54</td> <td>39.20</td> <td>18.19</td> <td>66.62</td> <td>0.29</td> <td>138</td> <td>14</td> <td>Average</td> </tr> <tr> <td>5</td> <td>17100.00</td> <td>51.22</td> <td>68.20</td> <td>-16.98</td> <td>56.83</td> <td>38.00</td> <td>22.84</td> <td>66.96</td> <td>0.51</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	7600.00	48.42	74.00	-25.58	63.21	36.40	14.51	66.24	0.54	100	185	Peak	2	7600.00	45.62	54.00	-8.38	60.41	36.40	14.51	66.24	0.54	100	185	Average	3	11400.00	49.74	74.00	-24.26	58.68	39.20	18.19	66.62	0.29	138	14	PEAK	4	11400.00	40.60	54.00	-13.40	49.54	39.20	18.19	66.62	0.29	138	14	Average	5	17100.00	51.22	68.20	-16.98	56.83	38.00	22.84	66.96	0.51	--	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																		
1	7600.00	49.33	74.00	-24.67	64.12	36.40	14.51	66.24	0.54	104	92	Peak																																																																																																																																																																														
2	7600.00	46.58	54.00	-7.42	61.37	36.40	14.51	66.24	0.54	104	92	Average																																																																																																																																																																														
3	11400.00	49.77	74.00	-24.23	58.71	39.20	18.19	66.62	0.29	221	128	PEAK																																																																																																																																																																														
4	11400.00	40.27	54.00	-13.73	49.21	39.20	18.19	66.62	0.29	221	128	Average																																																																																																																																																																														
5	17100.00	51.15	68.20	-17.05	56.76	38.00	22.84	66.96	0.51	--	--	PEAK																																																																																																																																																																														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																		
1	7600.00	48.42	74.00	-25.58	63.21	36.40	14.51	66.24	0.54	100	185	Peak																																																																																																																																																																														
2	7600.00	45.62	54.00	-8.38	60.41	36.40	14.51	66.24	0.54	100	185	Average																																																																																																																																																																														
3	11400.00	49.74	74.00	-24.26	58.68	39.20	18.19	66.62	0.29	138	14	PEAK																																																																																																																																																																														
4	11400.00	40.60	54.00	-13.40	49.54	39.20	18.19	66.62	0.29	138	14	Average																																																																																																																																																																														
5	17100.00	51.22	68.20	-16.98	56.83	38.00	22.84	66.96	0.51	--	--	PEAK																																																																																																																																																																														

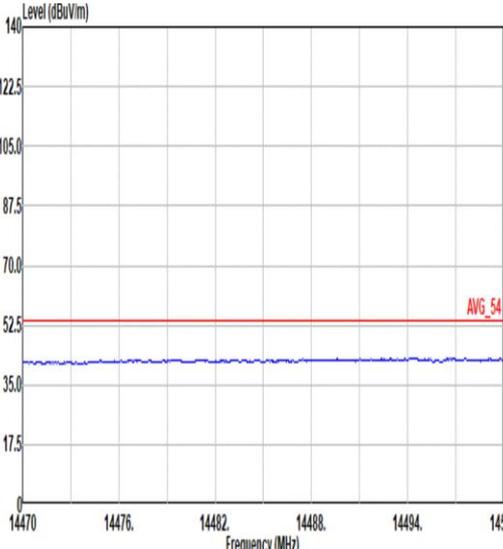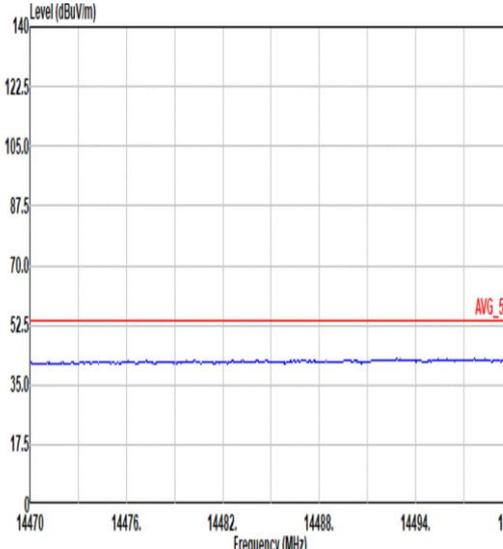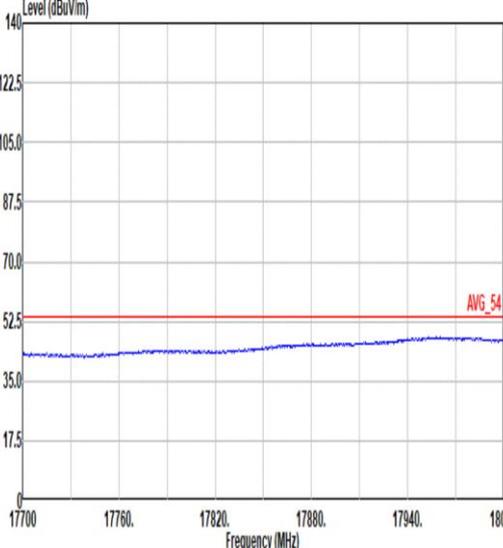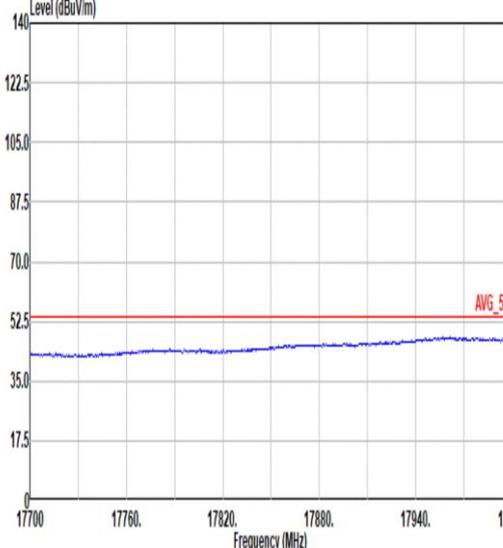

<b>Mode</b>	33	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz	
<b>ANT</b>	1	
<b>Pol.</b>	<b>Horizontal</b>	<b>Vertical</b>
<b>14.47G</b> <b>~14.5G</b> <b>Avg</b>	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 HORIZONTAL</p>	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 VERTICAL</p>
<b>17.7G</b> <b>~18G</b> <b>Avg</b>	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 HORIZONTAL</p>	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 VERTICAL</p>



Mode	34																																																																																																
	Band Edge																																																																																																
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz																																																																																																
ANT	1																																																																																																
Pol.	Horizontal	Fundamental																																																																																															
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5356.30</td> <td>53.24</td> <td>74.00</td> <td>-20.76</td> <td>41.56</td> <td>33.09</td> <td>11.71</td> <td>33.12</td> <td>0.00</td> <td>100</td> <td>73</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.85</td> <td>55.50</td> <td>68.20</td> <td>-12.70</td> <td>44.01</td> <td>33.08</td> <td>11.57</td> <td>33.16</td> <td>0.00</td> <td>100</td> <td>73</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5356.30	53.24	74.00	-20.76	41.56	33.09	11.71	33.12	0.00	100	73	PEAK	2	5469.85	55.50	68.20	-12.70	44.01	33.08	11.57	33.16	0.00	100	73	PEAK	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>99.28</td> <td>-----</td> <td>-----</td> <td>87.85</td> <td>33.20</td> <td>11.40</td> <td>33.17</td> <td>0.00</td> <td>100</td> <td>73</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	99.28	-----	-----	87.85	33.20	11.40	33.17	0.00	100	73	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5356.30	53.24	74.00	-20.76	41.56	33.09	11.71	33.12	0.00	100	73	PEAK																																																																																					
2	5469.85	55.50	68.20	-12.70	44.01	33.08	11.57	33.16	0.00	100	73	PEAK																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5500.00	99.28	-----	-----	87.85	33.20	11.40	33.17	0.00	100	73	PEAK																																																																																					
Avg	<p>Site : 03CH12-HY Condition: AVG_BE(UNII)_B3 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5386.90</td> <td>46.22</td> <td>54.00</td> <td>-7.78</td> <td>34.43</td> <td>33.03</td> <td>11.89</td> <td>33.13</td> <td>0.00</td> <td>100</td> <td>73</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5386.90	46.22	54.00	-7.78	34.43	33.03	11.89	33.13	0.00	100	73	AVERAGE	<p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>92.35</td> <td>-----</td> <td>-----</td> <td>80.92</td> <td>33.20</td> <td>11.40</td> <td>33.17</td> <td>0.00</td> <td>100</td> <td>73</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	92.35	-----	-----	80.92	33.20	11.40	33.17	0.00	100	73	AVERAGE													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5386.90	46.22	54.00	-7.78	34.43	33.03	11.89	33.13	0.00	100	73	AVERAGE																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5500.00	92.35	-----	-----	80.92	33.20	11.40	33.17	0.00	100	73	AVERAGE																																																																																					







Mode	34																																																																																																			
	Band Edge																																																																																																			
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Vertical	Fundamental																																																																																																		
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5413.00</td> <td>54.45</td> <td>74.00</td> <td>-19.55</td> <td>42.70</td> <td>33.00</td> <td>11.89</td> <td>33.14</td> <td>0.00</td> <td>270</td> <td>95 PEAK</td> </tr> <tr> <td>2</td> <td>5461.90</td> <td>52.46</td> <td>68.20</td> <td>-15.74</td> <td>40.96</td> <td>33.05</td> <td>11.61</td> <td>33.16</td> <td>0.00</td> <td>270</td> <td>95 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5413.00	54.45	74.00	-19.55	42.70	33.00	11.89	33.14	0.00	270	95 PEAK	2	5461.90	52.46	68.20	-15.74	40.96	33.05	11.61	33.16	0.00	270	95 PEAK	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>97.20</td> <td>-----</td> <td>-----</td> <td>85.77</td> <td>33.20</td> <td>11.40</td> <td>33.17</td> <td>0.00</td> <td>270</td> <td>95 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5500.00	97.20	-----	-----	85.77	33.20	11.40	33.17	0.00	270	95 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	5413.00	54.45	74.00	-19.55	42.70	33.00	11.89	33.14	0.00	270	95 PEAK																																																																																									
2	5461.90	52.46	68.20	-15.74	40.96	33.05	11.61	33.16	0.00	270	95 PEAK																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	5500.00	97.20	-----	-----	85.77	33.20	11.40	33.17	0.00	270	95 PEAK																																																																																									
Avg	<p>Site : 03CH12-HY Condition: AVG_BE(UNII)_B3 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5400.85</td> <td>46.37</td> <td>54.00</td> <td>-7.63</td> <td>34.55</td> <td>33.00</td> <td>11.96</td> <td>33.14</td> <td>0.00</td> <td>270</td> <td>95 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5400.85	46.37	54.00	-7.63	34.55	33.00	11.96	33.14	0.00	270	95 AVERAGE	<p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>90.65</td> <td>-----</td> <td>-----</td> <td>79.22</td> <td>33.20</td> <td>11.40</td> <td>33.17</td> <td>0.00</td> <td>270</td> <td>95 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5500.00	90.65	-----	-----	79.22	33.20	11.40	33.17	0.00	270	95 AVERAGE												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	5400.85	46.37	54.00	-7.63	34.55	33.00	11.96	33.14	0.00	270	95 AVERAGE																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	5500.00	90.65	-----	-----	79.22	33.20	11.40	33.17	0.00	270	95 AVERAGE																																																																																									



Mode	34																																																																																																																																																																																							
	Harmonic																																																																																																																																																																																							
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz																																																																																																																																																																																							
ANT	1																																																																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																																																																						
Peak Avg	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7333.00</td> <td>54.31</td> <td>74.00</td> <td>-19.69</td> <td>68.20</td> <td>37.00</td> <td>14.32</td> <td>66.05</td> <td>0.84</td> <td>400</td> <td>304</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7333.00</td> <td>52.24</td> <td>54.00</td> <td>-1.76</td> <td>66.13</td> <td>37.00</td> <td>14.32</td> <td>66.05</td> <td>0.84</td> <td>400</td> <td>304</td> <td>Average</td> </tr> <tr> <td>3</td> <td>11000.00</td> <td>49.04</td> <td>74.00</td> <td>-24.96</td> <td>59.47</td> <td>38.90</td> <td>17.39</td> <td>67.00</td> <td>0.28</td> <td>139</td> <td>2</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>11000.00</td> <td>39.89</td> <td>54.00</td> <td>-14.11</td> <td>50.32</td> <td>38.90</td> <td>17.39</td> <td>67.00</td> <td>0.28</td> <td>139</td> <td>2</td> <td>Average</td> </tr> <tr> <td>5</td> <td>16500.00</td> <td>51.54</td> <td>68.20</td> <td>-16.66</td> <td>56.71</td> <td>38.70</td> <td>22.53</td> <td>66.83</td> <td>0.43</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7333.00	54.31	74.00	-19.69	68.20	37.00	14.32	66.05	0.84	400	304	Peak	2	7333.00	52.24	54.00	-1.76	66.13	37.00	14.32	66.05	0.84	400	304	Average	3	11000.00	49.04	74.00	-24.96	59.47	38.90	17.39	67.00	0.28	139	2	PEAK	4	11000.00	39.89	54.00	-14.11	50.32	38.90	17.39	67.00	0.28	139	2	Average	5	16500.00	51.54	68.20	-16.66	56.71	38.70	22.53	66.83	0.43	--	--	PEAK	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7333.00</td> <td>53.64</td> <td>74.00</td> <td>-20.36</td> <td>67.53</td> <td>37.00</td> <td>14.32</td> <td>66.05</td> <td>0.84</td> <td>100</td> <td>247</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7333.00</td> <td>50.67</td> <td>54.00</td> <td>-3.33</td> <td>64.56</td> <td>37.00</td> <td>14.32</td> <td>66.05</td> <td>0.84</td> <td>100</td> <td>247</td> <td>Average</td> </tr> <tr> <td>3</td> <td>11000.00</td> <td>48.56</td> <td>74.00</td> <td>-25.44</td> <td>58.99</td> <td>38.90</td> <td>17.39</td> <td>67.00</td> <td>0.28</td> <td>310</td> <td>144</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>11000.00</td> <td>39.45</td> <td>54.00</td> <td>-14.55</td> <td>49.88</td> <td>38.90</td> <td>17.39</td> <td>67.00</td> <td>0.28</td> <td>310</td> <td>144</td> <td>Average</td> </tr> <tr> <td>5</td> <td>16500.00</td> <td>51.70</td> <td>68.20</td> <td>-16.50</td> <td>56.87</td> <td>38.70</td> <td>22.53</td> <td>66.83</td> <td>0.43</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7333.00	53.64	74.00	-20.36	67.53	37.00	14.32	66.05	0.84	100	247	Peak	2	7333.00	50.67	54.00	-3.33	64.56	37.00	14.32	66.05	0.84	100	247	Average	3	11000.00	48.56	74.00	-25.44	58.99	38.90	17.39	67.00	0.28	310	144	PEAK	4	11000.00	39.45	54.00	-14.55	49.88	38.90	17.39	67.00	0.28	310	144	Average	5	16500.00	51.70	68.20	-16.50	56.87	38.70	22.53	66.83	0.43	--	--	PEAK
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																													
1	7333.00	54.31	74.00	-19.69	68.20	37.00	14.32	66.05	0.84	400	304	Peak																																																																																																																																																																												
2	7333.00	52.24	54.00	-1.76	66.13	37.00	14.32	66.05	0.84	400	304	Average																																																																																																																																																																												
3	11000.00	49.04	74.00	-24.96	59.47	38.90	17.39	67.00	0.28	139	2	PEAK																																																																																																																																																																												
4	11000.00	39.89	54.00	-14.11	50.32	38.90	17.39	67.00	0.28	139	2	Average																																																																																																																																																																												
5	16500.00	51.54	68.20	-16.66	56.71	38.70	22.53	66.83	0.43	--	--	PEAK																																																																																																																																																																												
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																													
1	7333.00	53.64	74.00	-20.36	67.53	37.00	14.32	66.05	0.84	100	247	Peak																																																																																																																																																																												
2	7333.00	50.67	54.00	-3.33	64.56	37.00	14.32	66.05	0.84	100	247	Average																																																																																																																																																																												
3	11000.00	48.56	74.00	-25.44	58.99	38.90	17.39	67.00	0.28	310	144	PEAK																																																																																																																																																																												
4	11000.00	39.45	54.00	-14.55	49.88	38.90	17.39	67.00	0.28	310	144	Average																																																																																																																																																																												
5	16500.00	51.70	68.20	-16.50	56.87	38.70	22.53	66.83	0.43	--	--	PEAK																																																																																																																																																																												

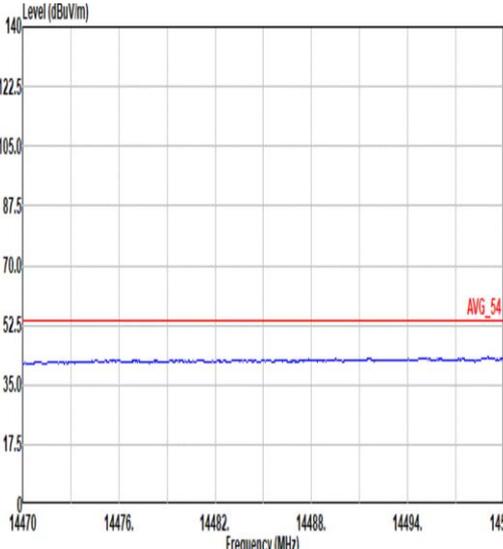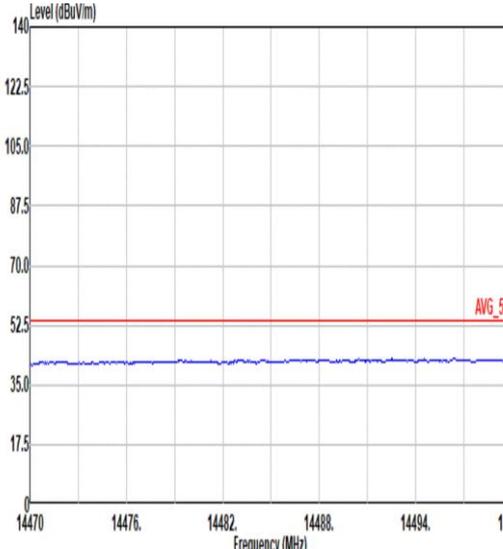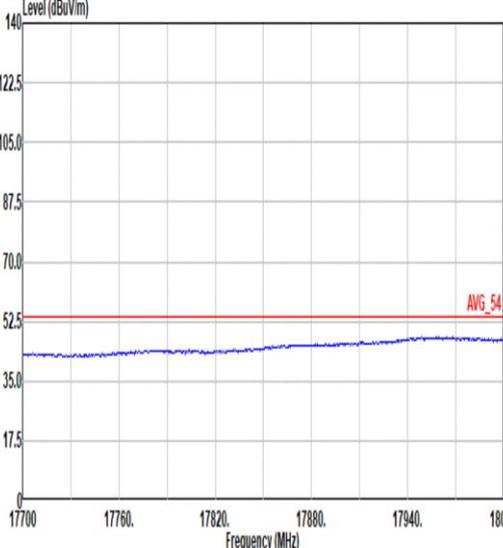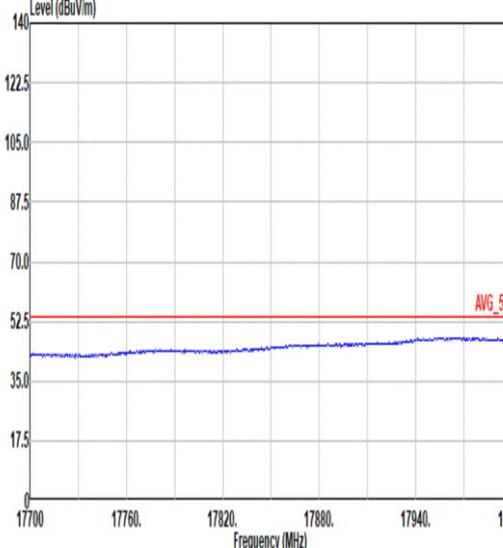

<b>Mode</b>	34	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz	
<b>ANT</b>	1	
<b>Pol.</b>	<b>Horizontal</b>	<b>Vertical</b>
<b>14.47G</b> <b>~14.5G</b> <b>Avg</b>	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 HORIZONTAL</p>	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 VERTICAL</p>
<b>17.7G</b> <b>~18G</b> <b>Avg</b>	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 HORIZONTAL</p>	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 VERTICAL</p>



Mode	35																																																																																														
	Band Edge - L																																																																																														
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full RU_5580MHz																																																																																														
ANT	1																																																																																														
Pol.	Horizontal	Fundamental																																																																																													
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5404.05</td> <td>53.40</td> <td>74.00</td> <td>-20.60</td> <td>41.60</td> <td>33.00</td> <td>11.94</td> <td>33.14</td> <td>0.00</td> <td>115</td> <td>67</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5466.61</td> <td>52.64</td> <td>68.20</td> <td>-15.56</td> <td>41.14</td> <td>33.07</td> <td>11.59</td> <td>33.16</td> <td>0.00</td> <td>115</td> <td>67</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5404.05	53.40	74.00	-20.60	41.60	33.00	11.94	33.14	0.00	115	67	PEAK	2	5466.61	52.64	68.20	-15.56	41.14	33.07	11.59	33.16	0.00	115	67	PEAK	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>99.07</td> <td>-----</td> <td>-----</td> <td>87.95</td> <td>33.10</td> <td>11.27</td> <td>33.25</td> <td>0.00</td> <td>115</td> <td>67</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5580.00	99.07	-----	-----	87.95	33.10	11.27	33.25	0.00	115	67	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	5404.05	53.40	74.00	-20.60	41.60	33.00	11.94	33.14	0.00	115	67	PEAK																																																																																			
2	5466.61	52.64	68.20	-15.56	41.14	33.07	11.59	33.16	0.00	115	67	PEAK																																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	5580.00	99.07	-----	-----	87.95	33.10	11.27	33.25	0.00	115	67	PEAK																																																																																			
Avg	<p>Site : 03CH12-HY Condition: AVG_BE(UNII)_B3 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5407.50</td> <td>45.73</td> <td>54.00</td> <td>-8.27</td> <td>33.95</td> <td>33.00</td> <td>11.92</td> <td>33.14</td> <td>0.00</td> <td>115</td> <td>67</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5407.50	45.73	54.00	-8.27	33.95	33.00	11.92	33.14	0.00	115	67	AVERAGE	<p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>92.35</td> <td>-----</td> <td>-----</td> <td>81.22</td> <td>33.10</td> <td>11.28</td> <td>33.25</td> <td>0.00</td> <td>115</td> <td>67</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5580.00	92.35	-----	-----	81.22	33.10	11.28	33.25	0.00	115	67	AVERAGE													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	5407.50	45.73	54.00	-8.27	33.95	33.00	11.92	33.14	0.00	115	67	AVERAGE																																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	5580.00	92.35	-----	-----	81.22	33.10	11.28	33.25	0.00	115	67	AVERAGE																																																																																			



Mode	35																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full RU_5580MHz																																								
ANT	1																																								
Pol.	Horizontal	Fundamental																																							
Peak	<p>Site : 03CH12-HY          Condition: PEAK_BE(UNII)_B3 3m 91200-02114-240711 HORIZONTAL          : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5740.95</td> <td>53.94</td> <td>68.20</td> <td>-14.26</td> <td>42.41</td> <td>33.76</td> <td>11.18</td> <td>33.41</td> <td>0.00</td> <td>115</td> <td>67 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5740.95	53.94	68.20	-14.26	42.41	33.76	11.18	33.41	0.00	115	67 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5740.95	53.94	68.20	-14.26	42.41	33.76	11.18	33.41	0.00	115	67 PEAK																															



Mode	35																																																																																
	Band Edge - L																																																																																
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full RU_5580MHz																																																																																
ANT	1																																																																																
Pol.	Vertical	Fundamental																																																																															
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5402.90</td> <td>53.64</td> <td>74.00</td> <td>-20.36</td> <td>41.84</td> <td>33.00</td> <td>11.94</td> <td>33.14</td> <td>0.00</td> <td>262</td> <td>89</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5463.85</td> <td>52.16</td> <td>68.20</td> <td>-16.04</td> <td>40.66</td> <td>33.06</td> <td>11.60</td> <td>33.16</td> <td>0.00</td> <td>262</td> <td>89</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	dB	cm	deg	1	5402.90	53.64	74.00	-20.36	41.84	33.00	11.94	33.14	0.00	262	89	PEAK	2	5463.85	52.16	68.20	-16.04	40.66	33.06	11.60	33.16	0.00	262	89	PEAK	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>97.42</td> <td>-----</td> <td>-----</td> <td>86.30</td> <td>33.10</td> <td>11.27</td> <td>33.25</td> <td>0.00</td> <td>262</td> <td>89</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	dB	cm	deg	1	5580.00	97.42	-----	-----	86.30	33.10	11.27	33.25	0.00	262	89	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	dB	cm	deg																																																																								
1	5402.90	53.64	74.00	-20.36	41.84	33.00	11.94	33.14	0.00	262	89	PEAK																																																																					
2	5463.85	52.16	68.20	-16.04	40.66	33.06	11.60	33.16	0.00	262	89	PEAK																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	dB	cm	deg																																																																								
1	5580.00	97.42	-----	-----	86.30	33.10	11.27	33.25	0.00	262	89	PEAK																																																																					
Avg	<p>Site : 03CH12-HY Condition: AVG_BE(UNII)_B3 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5391.40</td> <td>45.92</td> <td>54.00</td> <td>-8.08</td> <td>34.12</td> <td>33.02</td> <td>11.91</td> <td>33.13</td> <td>0.00</td> <td>262</td> <td>89</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	dB	cm	deg	1	5391.40	45.92	54.00	-8.08	34.12	33.02	11.91	33.13	0.00	262	89	AVERAGE	<p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>90.06</td> <td>-----</td> <td>-----</td> <td>78.93</td> <td>33.10</td> <td>11.28</td> <td>33.25</td> <td>0.00</td> <td>262</td> <td>89</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	dB	cm	deg	1	5580.00	90.06	-----	-----	78.93	33.10	11.28	33.25	0.00	262	89	AVERAGE													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	dB	cm	deg																																																																								
1	5391.40	45.92	54.00	-8.08	34.12	33.02	11.91	33.13	0.00	262	89	AVERAGE																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	dB	cm	deg																																																																								
1	5580.00	90.06	-----	-----	78.93	33.10	11.28	33.25	0.00	262	89	AVERAGE																																																																					



Mode	35																																														
	Band Edge - R																																														
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full RU_5580MHz																																														
ANT	1																																														
Pol.	Vertical	Fundamental																																													
Peak	<p>Site : 03CH12-HY          Condition: PEAK_BE(UNII)_B3 3m 91200-02114-240711 VERTICAL          : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5752.05</td> <td>54.83</td> <td>68.20</td> <td>-13.37</td> <td>43.26</td> <td>33.81</td> <td>11.18</td> <td>33.42</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>262 89 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5752.05	54.83	68.20	-13.37	43.26	33.81	11.18	33.42	0.00									262 89 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 5752.05	54.83	68.20	-13.37	43.26	33.81	11.18	33.42	0.00																																							
								262 89 PEAK																																							