



Mode	87																																														
	Band Edge - R																																														
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_52/37 RU_5260MHz																																														
ANT	2																																														
Pol.	Horizontal	Fundamental																																													
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5439.00</td> <td>54.19</td> <td>74.00</td> <td>-19.81</td> <td>42.60</td> <td>33.00</td> <td>11.74</td> <td>33.15</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>124 113 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5439.00	54.19	74.00	-19.81	42.60	33.00	11.74	33.15	0.00									124 113 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 5439.00	54.19	74.00	-19.81	42.60	33.00	11.74	33.15	0.00																																							
								124 113 PEAK																																							
Avg	<p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5457.00</td> <td>46.09</td> <td>54.00</td> <td>-7.91</td> <td>34.58</td> <td>33.03</td> <td>11.64</td> <td>33.16</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>124 113 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5457.00	46.09	54.00	-7.91	34.58	33.03	11.64	33.16	0.00									124 113 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 5457.00	46.09	54.00	-7.91	34.58	33.03	11.64	33.16	0.00																																							
								124 113 AVERAGE																																							



Mode	87																																																																															
	Band Edge - L																																																																															
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_52/37 RU_5260MHz																																																																															
ANT	2																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5094.64</td> <td>55.79</td> <td>74.00</td> <td>-18.21</td> <td>45.02</td> <td>33.20</td> <td>10.60</td> <td>33.03</td> <td>0.00</td> <td>350</td> <td>00 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5094.64	55.79	74.00	-18.21	45.02	33.20	10.60	33.03	0.00	350	00 PEAK	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5260.00</td> <td>96.30</td> <td>-----</td> <td>-----</td> <td>85.07</td> <td>33.18</td> <td>11.14</td> <td>33.09</td> <td>0.00</td> <td>350</td> <td>00 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5260.00	96.30	-----	-----	85.07	33.18	11.14	33.09	0.00	350	00 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5094.64	55.79	74.00	-18.21	45.02	33.20	10.60	33.03	0.00	350	00 PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5260.00	96.30	-----	-----	85.07	33.18	11.14	33.09	0.00	350	00 PEAK																																																																						
Avg	<p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5022.80</td> <td>46.21</td> <td>54.00</td> <td>-7.79</td> <td>35.47</td> <td>33.31</td> <td>10.44</td> <td>33.01</td> <td>0.00</td> <td>350</td> <td>00 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5022.80	46.21	54.00	-7.79	35.47	33.31	10.44	33.01	0.00	350	00 AVERAGE	<p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5260.00</td> <td>91.57</td> <td>-----</td> <td>-----</td> <td>80.34</td> <td>33.18</td> <td>11.14</td> <td>33.09</td> <td>0.00</td> <td>350</td> <td>00 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5260.00	91.57	-----	-----	80.34	33.18	11.14	33.09	0.00	350	00 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5022.80	46.21	54.00	-7.79	35.47	33.31	10.44	33.01	0.00	350	00 AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5260.00	91.57	-----	-----	80.34	33.18	11.14	33.09	0.00	350	00 AVERAGE																																																																						



Mode	87																																						
	Band Edge - R																																						
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_52/37 RU_5260MHz																																						
ANT	2																																						
Pol.	Vertical	Fundamental																																					
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91280-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5371.60</td> <td>54.35</td> <td>74.00</td> <td>-19.65</td> <td>42.62</td> <td>33.06</td> <td>11.80</td> <td>33.13</td> <td>0.00</td> <td>350 00 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5371.60	54.35	74.00	-19.65	42.62	33.06	11.80	33.13	0.00	350 00 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																															
1 5371.60	54.35	74.00	-19.65	42.62	33.06	11.80	33.13	0.00	350 00 PEAK																														
Avg	<p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91280-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5407.60</td> <td>46.05</td> <td>54.00</td> <td>-7.95</td> <td>34.27</td> <td>33.00</td> <td>11.92</td> <td>33.14</td> <td>0.00</td> <td>350 00 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5407.60	46.05	54.00	-7.95	34.27	33.00	11.92	33.14	0.00	350 00 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																															
1 5407.60	46.05	54.00	-7.95	34.27	33.00	11.92	33.14	0.00	350 00 AVERAGE																														



Mode	87																																																																																																																																																													
	Harmonic																																																																																																																																																													
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_52/37 RU_5260MHz																																																																																																																																																													
ANT	2																																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																																												
Peak Avg	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7013.00</td> <td>54.62</td> <td>68.20</td> <td>-13.58</td> <td>69.39</td> <td>36.15</td> <td>13.94</td> <td>65.78</td> <td>0.92</td> <td>396</td> <td>268</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10520.00</td> <td>48.00</td> <td>68.20</td> <td>-20.20</td> <td>59.34</td> <td>38.64</td> <td>17.18</td> <td>67.41</td> <td>0.25</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15780.00</td> <td>49.19</td> <td>74.00</td> <td>-24.81</td> <td>56.09</td> <td>38.02</td> <td>22.11</td> <td>67.40</td> <td>0.37</td> <td>133</td> <td>85</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>15780.00</td> <td>39.31</td> <td>54.00</td> <td>-14.69</td> <td>46.21</td> <td>38.02</td> <td>22.11</td> <td>67.40</td> <td>0.37</td> <td>133</td> <td>85</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7013.00	54.62	68.20	-13.58	69.39	36.15	13.94	65.78	0.92	396	268	Peak	2	10520.00	48.00	68.20	-20.20	59.34	38.64	17.18	67.41	0.25	--	--	PEAK	3	15780.00	49.19	74.00	-24.81	56.09	38.02	22.11	67.40	0.37	133	85	PEAK	4	15780.00	39.31	54.00	-14.69	46.21	38.02	22.11	67.40	0.37	133	85	Average	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7013.00</td> <td>53.43</td> <td>68.20</td> <td>-14.77</td> <td>68.20</td> <td>36.15</td> <td>13.94</td> <td>65.78</td> <td>0.92</td> <td>106</td> <td>196</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10520.00</td> <td>46.71</td> <td>68.20</td> <td>-21.49</td> <td>58.05</td> <td>38.64</td> <td>17.18</td> <td>67.41</td> <td>0.25</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15780.00</td> <td>50.01</td> <td>74.00</td> <td>-23.99</td> <td>56.91</td> <td>38.02</td> <td>22.11</td> <td>67.40</td> <td>0.37</td> <td>227</td> <td>126</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>15780.00</td> <td>40.15</td> <td>54.00</td> <td>-13.85</td> <td>47.05</td> <td>38.02</td> <td>22.11</td> <td>67.40</td> <td>0.37</td> <td>227</td> <td>126</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7013.00	53.43	68.20	-14.77	68.20	36.15	13.94	65.78	0.92	106	196	Peak	2	10520.00	46.71	68.20	-21.49	58.05	38.64	17.18	67.41	0.25	--	--	PEAK	3	15780.00	50.01	74.00	-23.99	56.91	38.02	22.11	67.40	0.37	227	126	PEAK	4	15780.00	40.15	54.00	-13.85	47.05	38.02	22.11	67.40	0.37	227	126	Average
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																			
1	7013.00	54.62	68.20	-13.58	69.39	36.15	13.94	65.78	0.92	396	268	Peak																																																																																																																																																		
2	10520.00	48.00	68.20	-20.20	59.34	38.64	17.18	67.41	0.25	--	--	PEAK																																																																																																																																																		
3	15780.00	49.19	74.00	-24.81	56.09	38.02	22.11	67.40	0.37	133	85	PEAK																																																																																																																																																		
4	15780.00	39.31	54.00	-14.69	46.21	38.02	22.11	67.40	0.37	133	85	Average																																																																																																																																																		
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																			
1	7013.00	53.43	68.20	-14.77	68.20	36.15	13.94	65.78	0.92	106	196	Peak																																																																																																																																																		
2	10520.00	46.71	68.20	-21.49	58.05	38.64	17.18	67.41	0.25	--	--	PEAK																																																																																																																																																		
3	15780.00	50.01	74.00	-23.99	56.91	38.02	22.11	67.40	0.37	227	126	PEAK																																																																																																																																																		
4	15780.00	40.15	54.00	-13.85	47.05	38.02	22.11	67.40	0.37	227	126	Average																																																																																																																																																		



Mode	87	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_52/37 RU_5260MHz	
ANT	2	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	<p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 HORIZONTAL</p>	<p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 VERTICAL</p>
	17.7G ~18G Avg	<p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 HORIZONTAL</p>







		88																																																																																			
Mode	Band Edge - L																																																																																				
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_106//53 RU_5260MHz																																																																																				
ANT	2																																																																																				
Pol.	Horizontal	Fundamental																																																																																			
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5117.00</td> <td>55.38</td> <td>74.00</td> <td>-18.62</td> <td>44.50</td> <td>33.27</td> <td>10.65</td> <td>33.04</td> <td>0.00</td> <td>118</td> <td>112</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5117.00	55.38	74.00	-18.62	44.50	33.27	10.65	33.04	0.00	118	112	PEAK	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5260.00</td> <td>97.98</td> <td>-----</td> <td>-----</td> <td>86.75</td> <td>33.18</td> <td>11.14</td> <td>33.09</td> <td>0.00</td> <td>118</td> <td>112</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5260.00	97.98	-----	-----	86.75	33.18	11.14	33.09	0.00	118	112	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5117.00	55.38	74.00	-18.62	44.50	33.27	10.65	33.04	0.00	118	112	PEAK																																																																									
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5260.00	97.98	-----	-----	86.75	33.18	11.14	33.09	0.00	118	112	PEAK																																																																									
Avg	<p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5030.22</td> <td>45.78</td> <td>54.00</td> <td>-8.22</td> <td>35.07</td> <td>33.25</td> <td>10.47</td> <td>33.01</td> <td>0.00</td> <td>118</td> <td>112</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5030.22	45.78	54.00	-8.22	35.07	33.25	10.47	33.01	0.00	118	112	AVERAGE	<p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5260.00</td> <td>91.81</td> <td>-----</td> <td>-----</td> <td>80.58</td> <td>33.18</td> <td>11.14</td> <td>33.09</td> <td>0.00</td> <td>118</td> <td>112</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5260.00	91.81	-----	-----	80.58	33.18	11.14	33.09	0.00	118	112	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5030.22	45.78	54.00	-8.22	35.07	33.25	10.47	33.01	0.00	118	112	AVERAGE																																																																									
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5260.00	91.81	-----	-----	80.58	33.18	11.14	33.09	0.00	118	112	AVERAGE																																																																									



Mode	88																																					
	Band Edge - R																																					
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_106//53 RU_5260MHz																																					
ANT	2																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91280-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5396.00</td> <td>55.42</td> <td>74.00</td> <td>-18.58</td> <td>43.60</td> <td>33.01</td> <td>11.94</td> <td>33.13</td> <td>0.00 118 112 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5396.00	55.42	74.00	-18.58	43.60	33.01	11.94	33.13	0.00 118 112 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																														
1 5396.00	55.42	74.00	-18.58	43.60	33.01	11.94	33.13	0.00 118 112 PEAK																														
Avg	<p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91280-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5401.00</td> <td>45.63</td> <td>54.00</td> <td>-8.37</td> <td>33.02</td> <td>33.00</td> <td>11.95</td> <td>33.14</td> <td>0.00 118 112 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5401.00	45.63	54.00	-8.37	33.02	33.00	11.95	33.14	0.00 118 112 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																														
1 5401.00	45.63	54.00	-8.37	33.02	33.00	11.95	33.14	0.00 118 112 AVERAGE																														

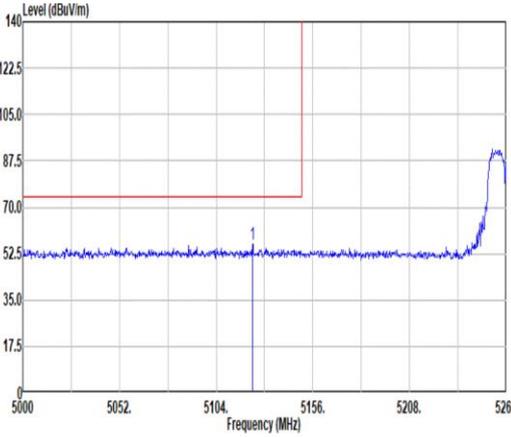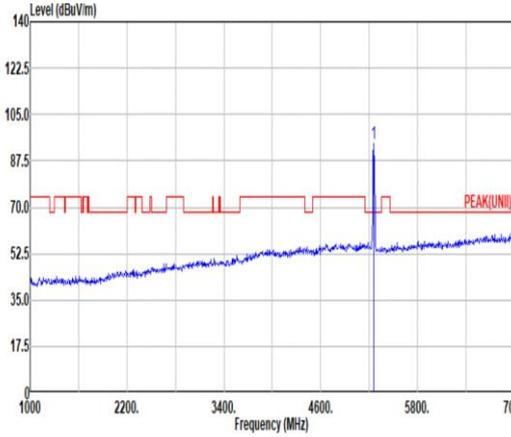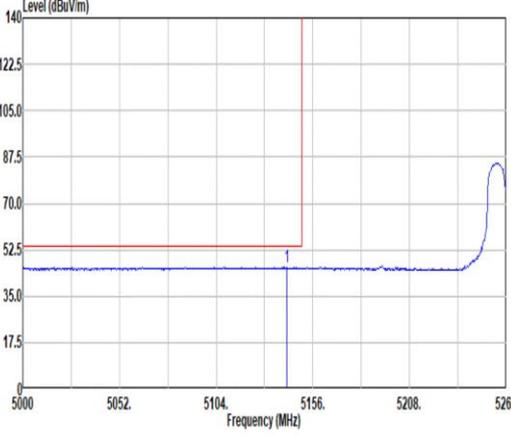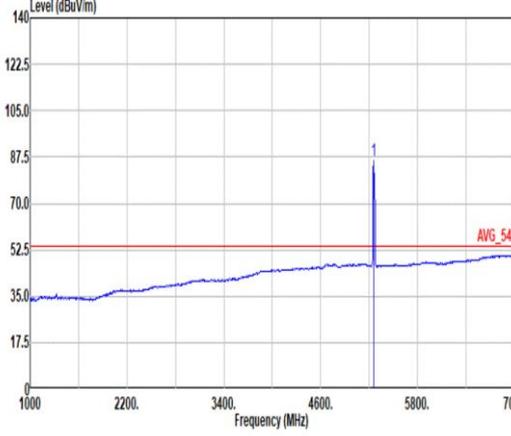

Mode	88																																																																																			
	Band Edge - L																																																																																			
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_106//53 RU_5260MHz																																																																																			
ANT	2																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	 <p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5123.50</td> <td>55.91</td> <td>74.00</td> <td>-18.09</td> <td>45.00</td> <td>33.29</td> <td>10.66</td> <td>33.04</td> <td>0.00</td> <td>314</td> <td>75</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5123.50	55.91	74.00	-18.09	45.00	33.29	10.66	33.04	0.00	314	75	PEAK	 <p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5260.00</td> <td>93.04</td> <td>-----</td> <td>-----</td> <td>82.61</td> <td>33.18</td> <td>11.14</td> <td>33.09</td> <td>0.00</td> <td>314</td> <td>75</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5260.00	93.04	-----	-----	82.61	33.18	11.14	33.09	0.00	314	75	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5123.50	55.91	74.00	-18.09	45.00	33.29	10.66	33.04	0.00	314	75	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5260.00	93.04	-----	-----	82.61	33.18	11.14	33.09	0.00	314	75	PEAK																																																																								
Avg	 <p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5141.96</td> <td>46.13</td> <td>54.00</td> <td>-7.87</td> <td>35.11</td> <td>33.37</td> <td>10.70</td> <td>33.05</td> <td>0.00</td> <td>314</td> <td>75</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5141.96	46.13	54.00	-7.87	35.11	33.37	10.70	33.05	0.00	314	75	AVERAGE	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5260.00</td> <td>86.37</td> <td>-----</td> <td>-----</td> <td>75.14</td> <td>33.18</td> <td>11.14</td> <td>33.09</td> <td>0.00</td> <td>314</td> <td>75</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5260.00	86.37	-----	-----	75.14	33.18	11.14	33.09	0.00	314	75	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5141.96	46.13	54.00	-7.87	35.11	33.37	10.70	33.05	0.00	314	75	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5260.00	86.37	-----	-----	75.14	33.18	11.14	33.09	0.00	314	75	AVERAGE																																																																								







Mode	88																																					
	Band Edge - R																																					
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_106//53 RU_5260MHz																																					
ANT	2																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91280-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5424.00</td> <td>54.43</td> <td>74.00</td> <td>-19.57</td> <td>42.75</td> <td>33.00</td> <td>11.82</td> <td>33.14</td> <td>0.00 314 75 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5424.00	54.43	74.00	-19.57	42.75	33.00	11.82	33.14	0.00 314 75 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																														
1 5424.00	54.43	74.00	-19.57	42.75	33.00	11.82	33.14	0.00 314 75 PEAK																														
Avg	<p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91280-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5421.00</td> <td>45.58</td> <td>54.00</td> <td>-8.42</td> <td>33.08</td> <td>33.00</td> <td>11.84</td> <td>33.14</td> <td>0.00 314 75 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5421.00	45.58	54.00	-8.42	33.08	33.00	11.84	33.14	0.00 314 75 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																														
1 5421.00	45.58	54.00	-8.42	33.08	33.00	11.84	33.14	0.00 314 75 AVERAGE																														



Mode	88																																																																																																																																																									
	Harmonic																																																																																																																																																									
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_106//53 RU_5260MHz																																																																																																																																																									
ANT	2																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																								
Peak Avg	<p>Site : 03CH12-HY Condition: PEAK(U11) 3m 91200-02114-240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 7013.00</td> <td>54.83</td> <td>68.20</td> <td>-13.37</td> <td>69.60</td> <td>36.15</td> <td>13.94</td> <td>65.78</td> <td>0.92</td> <td>396</td> <td>269</td> <td>Peak</td> </tr> <tr> <td>2 10520.00</td> <td>47.82</td> <td>68.20</td> <td>-20.38</td> <td>59.16</td> <td>38.64</td> <td>17.18</td> <td>67.41</td> <td>0.25</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3 15780.00</td> <td>50.10</td> <td>74.00</td> <td>-23.90</td> <td>57.00</td> <td>38.02</td> <td>22.11</td> <td>67.40</td> <td>0.37</td> <td>133</td> <td>00</td> <td>PEAK</td> </tr> <tr> <td>4 15780.00</td> <td>40.28</td> <td>54.00</td> <td>-13.72</td> <td>47.18</td> <td>38.02</td> <td>22.11</td> <td>67.40</td> <td>0.37</td> <td>133</td> <td>00</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 7013.00	54.83	68.20	-13.37	69.60	36.15	13.94	65.78	0.92	396	269	Peak	2 10520.00	47.82	68.20	-20.38	59.16	38.64	17.18	67.41	0.25	--	--	PEAK	3 15780.00	50.10	74.00	-23.90	57.00	38.02	22.11	67.40	0.37	133	00	PEAK	4 15780.00	40.28	54.00	-13.72	47.18	38.02	22.11	67.40	0.37	133	00	Average	<p>Site : 03CH12-HY Condition: PEAK(U11) 3m 91200-02114-240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 7013.00</td> <td>54.53</td> <td>68.20</td> <td>-13.67</td> <td>69.30</td> <td>36.15</td> <td>13.94</td> <td>65.78</td> <td>0.92</td> <td>104</td> <td>203</td> <td>Peak</td> </tr> <tr> <td>2 10520.00</td> <td>49.01</td> <td>68.20</td> <td>-19.19</td> <td>60.35</td> <td>38.64</td> <td>17.18</td> <td>67.41</td> <td>0.25</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3 15780.00</td> <td>49.88</td> <td>74.00</td> <td>-24.12</td> <td>56.78</td> <td>38.02</td> <td>22.11</td> <td>67.40</td> <td>0.37</td> <td>221</td> <td>135</td> <td>PEAK</td> </tr> <tr> <td>4 15780.00</td> <td>40.01</td> <td>54.00</td> <td>-13.99</td> <td>46.91</td> <td>38.02</td> <td>22.11</td> <td>67.40</td> <td>0.37</td> <td>221</td> <td>135</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 7013.00	54.53	68.20	-13.67	69.30	36.15	13.94	65.78	0.92	104	203	Peak	2 10520.00	49.01	68.20	-19.19	60.35	38.64	17.18	67.41	0.25	--	--	PEAK	3 15780.00	49.88	74.00	-24.12	56.78	38.02	22.11	67.40	0.37	221	135	PEAK	4 15780.00	40.01	54.00	-13.99	46.91	38.02	22.11	67.40	0.37	221	135	Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																	
1 7013.00	54.83	68.20	-13.37	69.60	36.15	13.94	65.78	0.92	396	269	Peak																																																																																																																																															
2 10520.00	47.82	68.20	-20.38	59.16	38.64	17.18	67.41	0.25	--	--	PEAK																																																																																																																																															
3 15780.00	50.10	74.00	-23.90	57.00	38.02	22.11	67.40	0.37	133	00	PEAK																																																																																																																																															
4 15780.00	40.28	54.00	-13.72	47.18	38.02	22.11	67.40	0.37	133	00	Average																																																																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																	
1 7013.00	54.53	68.20	-13.67	69.30	36.15	13.94	65.78	0.92	104	203	Peak																																																																																																																																															
2 10520.00	49.01	68.20	-19.19	60.35	38.64	17.18	67.41	0.25	--	--	PEAK																																																																																																																																															
3 15780.00	49.88	74.00	-24.12	56.78	38.02	22.11	67.40	0.37	221	135	PEAK																																																																																																																																															
4 15780.00	40.01	54.00	-13.99	46.91	38.02	22.11	67.40	0.37	221	135	Average																																																																																																																																															

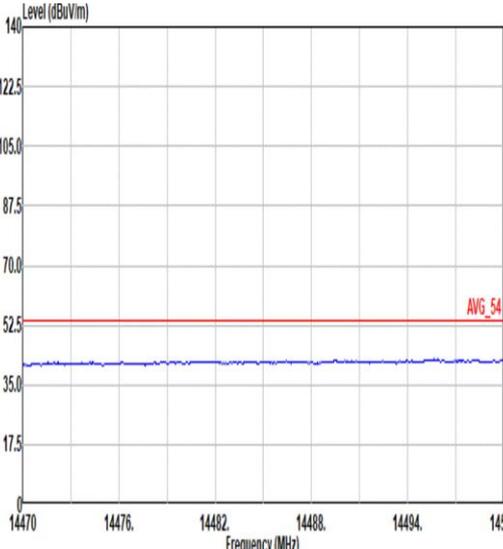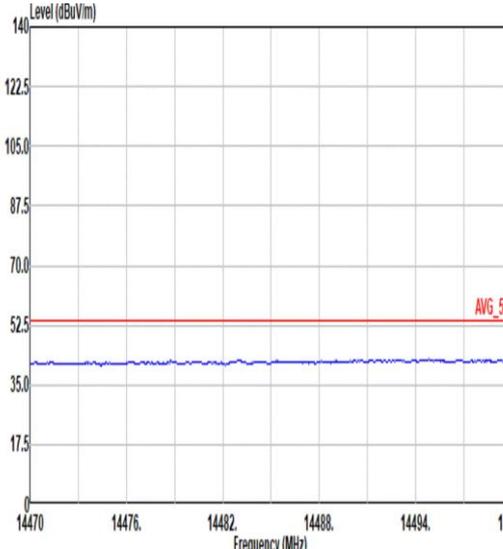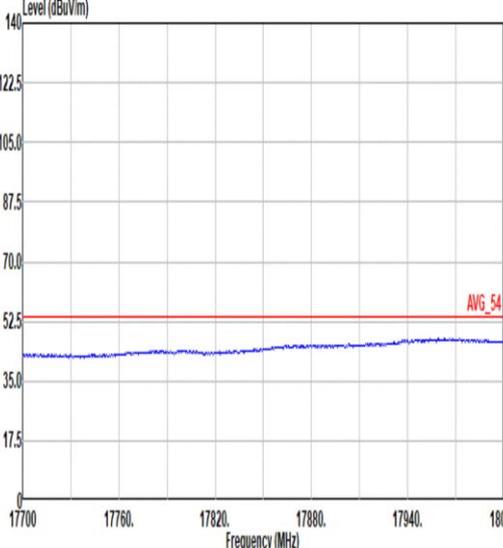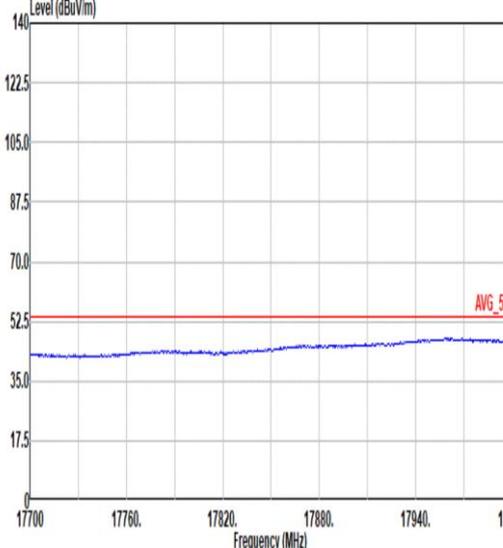

Mode	88	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_106//53 RU_5260MHz	
ANT	2	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 HORIZONTAL</p>	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 VERTICAL</p>
17.7G ~18G Avg	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 HORIZONTAL</p>	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 VERTICAL</p>



		89																																																																														
Mode		Band Edge - L																																																																														
		U-NII-2A_5.25-5.35_802.11ax HE20_CH60_26/4 RU_5300MHz																																																																														
ANT		2																																																																														
Pol.	Horizontal	Fundamental																																																																														
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>55.92</td> <td>74.00</td> <td>-18.08</td> <td>44.85</td> <td>33.40</td> <td>10.72</td> <td>33.05</td> <td>0.00</td> <td>123</td> <td>117</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5150.00	55.92	74.00	-18.08	44.85	33.40	10.72	33.05	0.00	123	117	PEAK	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5300.00</td> <td>100.00</td> <td>-----</td> <td>-----</td> <td>89.49</td> <td>33.00</td> <td>11.41</td> <td>33.10</td> <td>0.00</td> <td>123</td> <td>117</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5300.00	100.00	-----	-----	89.49	33.00	11.41	33.10	0.00	123	117	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5150.00	55.92	74.00	-18.08	44.85	33.40	10.72	33.05	0.00	123	117	PEAK																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5300.00	100.00	-----	-----	89.49	33.00	11.41	33.10	0.00	123	117	PEAK																																																																				
Avg	<p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5135.00</td> <td>46.09</td> <td>54.00</td> <td>-7.91</td> <td>35.11</td> <td>33.34</td> <td>10.69</td> <td>33.05</td> <td>0.00</td> <td>123</td> <td>117</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5135.00	46.09	54.00	-7.91	35.11	33.34	10.69	33.05	0.00	123	117	AVERAGE	<p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5300.00</td> <td>95.01</td> <td>-----</td> <td>-----</td> <td>83.70</td> <td>33.00</td> <td>11.41</td> <td>33.10</td> <td>0.00</td> <td>123</td> <td>117</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5300.00	95.01	-----	-----	83.70	33.00	11.41	33.10	0.00	123	117	AVERAGE
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5135.00	46.09	54.00	-7.91	35.11	33.34	10.69	33.05	0.00	123	117	AVERAGE																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5300.00	95.01	-----	-----	83.70	33.00	11.41	33.10	0.00	123	117	AVERAGE																																																																				



Mode	89																																														
	Band Edge - R																																														
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_26/4 RU_5300MHz																																														
ANT	2																																														
Pol.	Horizontal	Fundamental																																													
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91280-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5429.68</td> <td>54.47</td> <td>74.00</td> <td>-19.53</td> <td>42.83</td> <td>33.00</td> <td>11.79</td> <td>33.15</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>123 117 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5429.68	54.47	74.00	-19.53	42.83	33.00	11.79	33.15	0.00									123 117 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 5429.68	54.47	74.00	-19.53	42.83	33.00	11.79	33.15	0.00																																							
								123 117 PEAK																																							
Avg	<p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91280-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5380.64</td> <td>46.25</td> <td>54.00</td> <td>-7.75</td> <td>34.49</td> <td>33.04</td> <td>11.85</td> <td>33.13</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>123 117 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5380.64	46.25	54.00	-7.75	34.49	33.04	11.85	33.13	0.00									123 117 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 5380.64	46.25	54.00	-7.75	34.49	33.04	11.85	33.13	0.00																																							
								123 117 AVERAGE																																							



		89																																																																																		
Mode		Band Edge - L																																																																																		
		U-NII-2A_5.25-5.35_802.11ax HE20_CH60_26/4 RU_5300MHz																																																																																		
ANT		2																																																																																		
Pol.	Vertical	Fundamental																																																																																		
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5039.00</td> <td>55.41</td> <td>74.00</td> <td>-18.59</td> <td>44.70</td> <td>33.24</td> <td>10.48</td> <td>33.01</td> <td>0.00</td> <td>307</td> <td>89</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5039.00	55.41	74.00	-18.59	44.70	33.24	10.48	33.01	0.00	307	89	PEAK	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5300.00</td> <td>98.68</td> <td>-----</td> <td>-----</td> <td>87.37</td> <td>33.00</td> <td>11.41</td> <td>33.10</td> <td>0.00</td> <td>307</td> <td>89</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5300.00	98.68	-----	-----	87.37	33.00	11.41	33.10	0.00	307	89	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5039.00	55.41	74.00	-18.59	44.70	33.24	10.48	33.01	0.00	307	89	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5300.00	98.68	-----	-----	87.37	33.00	11.41	33.10	0.00	307	89	PEAK																																																																								
Avg	<p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5131.70</td> <td>46.11</td> <td>54.00</td> <td>-7.89</td> <td>35.14</td> <td>33.33</td> <td>10.60</td> <td>33.04</td> <td>0.00</td> <td>307</td> <td>89</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5131.70	46.11	54.00	-7.89	35.14	33.33	10.60	33.04	0.00	307	89	AVERAGE	<p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5300.00</td> <td>91.28</td> <td>-----</td> <td>-----</td> <td>79.97</td> <td>33.00</td> <td>11.41</td> <td>33.10</td> <td>0.00</td> <td>307</td> <td>89</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5300.00	91.28	-----	-----	79.97	33.00	11.41	33.10	0.00	307	89	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5131.70	46.11	54.00	-7.89	35.14	33.33	10.60	33.04	0.00	307	89	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5300.00	91.28	-----	-----	79.97	33.00	11.41	33.10	0.00	307	89	AVERAGE																																																																								







Mode	89																																														
	Band Edge - R																																														
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_26/4 RU_5300MHz																																														
ANT	2																																														
Pol.	Vertical	Fundamental																																													
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5373.92</td> <td>54.62</td> <td>74.00</td> <td>-19.38</td> <td>42.09</td> <td>33.05</td> <td>11.81</td> <td>33.13</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>307 89 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5373.92	54.62	74.00	-19.38	42.09	33.05	11.81	33.13	0.00									307 89 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 5373.92	54.62	74.00	-19.38	42.09	33.05	11.81	33.13	0.00																																							
								307 89 PEAK																																							
Avg	<p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5362.40</td> <td>45.81</td> <td>54.00</td> <td>-8.19</td> <td>34.10</td> <td>33.00</td> <td>11.75</td> <td>33.12</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>307 89 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5362.40	45.81	54.00	-8.19	34.10	33.00	11.75	33.12	0.00									307 89 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 5362.40	45.81	54.00	-8.19	34.10	33.00	11.75	33.12	0.00																																							
								307 89 AVERAGE																																							



Mode	89																																																																																																																																																													
	Harmonic																																																																																																																																																													
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_26/4 RU_5300MHz																																																																																																																																																													
ANT	2																																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																																												
Peak Avg	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7066.00</td> <td>53.49</td> <td>68.20</td> <td>-14.71</td> <td>68.07</td> <td>36.40</td> <td>13.94</td> <td>65.83</td> <td>0.91</td> <td>391</td> <td>263</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10600.00</td> <td>47.79</td> <td>74.00</td> <td>-26.21</td> <td>58.56</td> <td>39.10</td> <td>17.21</td> <td>67.34</td> <td>0.26</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15900.00</td> <td>49.61</td> <td>74.00</td> <td>-24.39</td> <td>56.00</td> <td>37.90</td> <td>22.21</td> <td>67.47</td> <td>0.37</td> <td>115</td> <td>78</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>15900.00</td> <td>39.83</td> <td>54.00</td> <td>-14.17</td> <td>46.82</td> <td>37.90</td> <td>22.21</td> <td>67.47</td> <td>0.37</td> <td>115</td> <td>78</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7066.00	53.49	68.20	-14.71	68.07	36.40	13.94	65.83	0.91	391	263	Peak	2	10600.00	47.79	74.00	-26.21	58.56	39.10	17.21	67.34	0.26	--	--	PEAK	3	15900.00	49.61	74.00	-24.39	56.00	37.90	22.21	67.47	0.37	115	78	PEAK	4	15900.00	39.83	54.00	-14.17	46.82	37.90	22.21	67.47	0.37	115	78	Average	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7066.00</td> <td>53.54</td> <td>68.20</td> <td>-14.66</td> <td>68.12</td> <td>36.40</td> <td>13.94</td> <td>65.83</td> <td>0.91</td> <td>100</td> <td>205</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10600.00</td> <td>47.30</td> <td>74.00</td> <td>-26.70</td> <td>58.07</td> <td>39.10</td> <td>17.21</td> <td>67.34</td> <td>0.26</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15900.00</td> <td>49.55</td> <td>74.00</td> <td>-24.45</td> <td>56.54</td> <td>37.90</td> <td>22.21</td> <td>67.47</td> <td>0.37</td> <td>213</td> <td>125</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>15900.00</td> <td>39.67</td> <td>54.00</td> <td>-14.33</td> <td>46.66</td> <td>37.90</td> <td>22.21</td> <td>67.47</td> <td>0.37</td> <td>213</td> <td>125</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7066.00	53.54	68.20	-14.66	68.12	36.40	13.94	65.83	0.91	100	205	Peak	2	10600.00	47.30	74.00	-26.70	58.07	39.10	17.21	67.34	0.26	--	--	PEAK	3	15900.00	49.55	74.00	-24.45	56.54	37.90	22.21	67.47	0.37	213	125	PEAK	4	15900.00	39.67	54.00	-14.33	46.66	37.90	22.21	67.47	0.37	213	125	Average
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																			
1	7066.00	53.49	68.20	-14.71	68.07	36.40	13.94	65.83	0.91	391	263	Peak																																																																																																																																																		
2	10600.00	47.79	74.00	-26.21	58.56	39.10	17.21	67.34	0.26	--	--	PEAK																																																																																																																																																		
3	15900.00	49.61	74.00	-24.39	56.00	37.90	22.21	67.47	0.37	115	78	PEAK																																																																																																																																																		
4	15900.00	39.83	54.00	-14.17	46.82	37.90	22.21	67.47	0.37	115	78	Average																																																																																																																																																		
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																			
1	7066.00	53.54	68.20	-14.66	68.12	36.40	13.94	65.83	0.91	100	205	Peak																																																																																																																																																		
2	10600.00	47.30	74.00	-26.70	58.07	39.10	17.21	67.34	0.26	--	--	PEAK																																																																																																																																																		
3	15900.00	49.55	74.00	-24.45	56.54	37.90	22.21	67.47	0.37	213	125	PEAK																																																																																																																																																		
4	15900.00	39.67	54.00	-14.33	46.66	37.90	22.21	67.47	0.37	213	125	Average																																																																																																																																																		

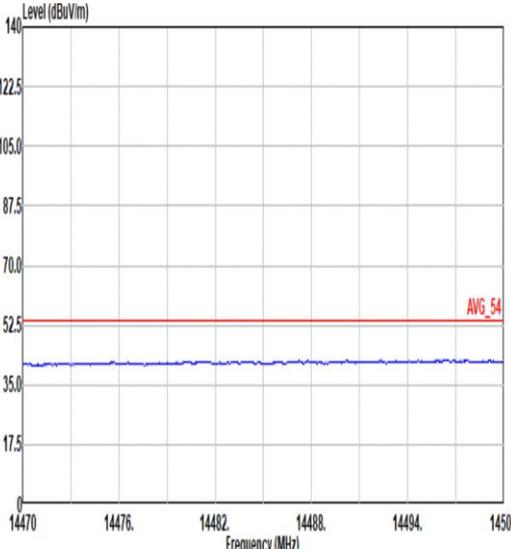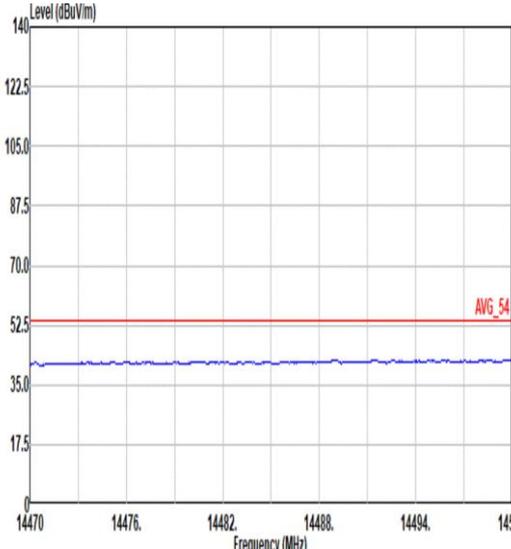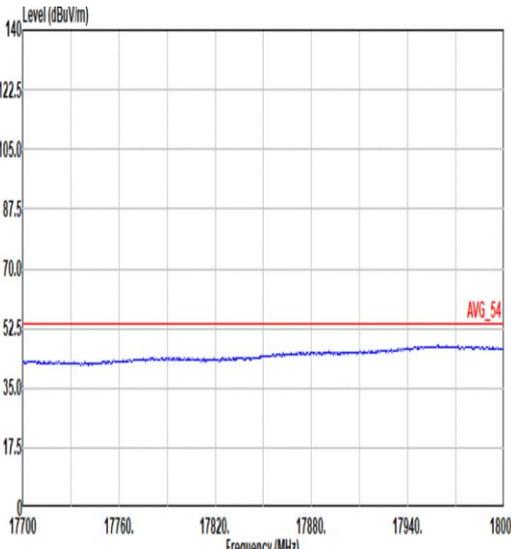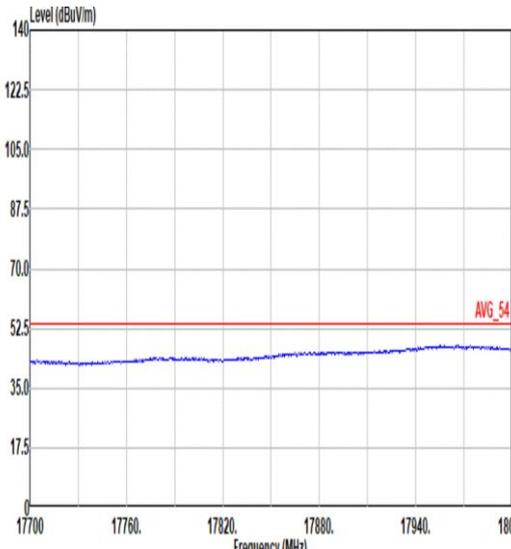

Mode	89	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_26/4 RU_5300MHz	
ANT	2	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 HORIZONTAL</p>	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 VERTICAL</p>
17.7G ~18G Avg	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 HORIZONTAL</p>	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 VERTICAL</p>



Mode	90																																																																																			
	Band Edge - L																																																																																			
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_52/38 RU_5300MHz																																																																																			
ANT	2																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5134.10</td> <td>55.10</td> <td>74.00</td> <td>-18.90</td> <td>44.12</td> <td>33.34</td> <td>10.69</td> <td>33.05</td> <td>0.00</td> <td>100</td> <td>111</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5134.10	55.10	74.00	-18.90	44.12	33.34	10.69	33.05	0.00	100	111	PEAK	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5300.00</td> <td>100.44</td> <td>-----</td> <td>-----</td> <td>89.15</td> <td>33.02</td> <td>11.37</td> <td>33.10</td> <td>0.00</td> <td>100</td> <td>111</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5300.00	100.44	-----	-----	89.15	33.02	11.37	33.10	0.00	100	111	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5134.10	55.10	74.00	-18.90	44.12	33.34	10.69	33.05	0.00	100	111	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5300.00	100.44	-----	-----	89.15	33.02	11.37	33.10	0.00	100	111	PEAK																																																																								
Avg	<p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5087.90</td> <td>46.24</td> <td>54.00</td> <td>-7.76</td> <td>35.49</td> <td>33.20</td> <td>10.58</td> <td>33.03</td> <td>0.00</td> <td>100</td> <td>111</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5087.90	46.24	54.00	-7.76	35.49	33.20	10.58	33.03	0.00	100	111	AVERAGE	<p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5300.00</td> <td>95.00</td> <td>-----</td> <td>-----</td> <td>83.71</td> <td>33.02</td> <td>11.37</td> <td>33.10</td> <td>0.00</td> <td>100</td> <td>111</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5300.00	95.00	-----	-----	83.71	33.02	11.37	33.10	0.00	100	111	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5087.90	46.24	54.00	-7.76	35.49	33.20	10.58	33.03	0.00	100	111	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5300.00	95.00	-----	-----	83.71	33.02	11.37	33.10	0.00	100	111	AVERAGE																																																																								



Mode	90																																							
	Band Edge - R																																							
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_52/38 RU_5300MHz																																							
ANT	2																																							
Pol.	Horizontal	Fundamental																																						
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91280-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5364.48</td> <td>54.28</td> <td>74.00</td> <td>-19.72</td> <td>42.57</td> <td>33.07</td> <td>11.76</td> <td>33.12</td> <td>0.00</td> <td>100</td> <td>111 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5364.48	54.28	74.00	-19.72	42.57	33.07	11.76	33.12	0.00	100	111 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																
1 5364.48	54.28	74.00	-19.72	42.57	33.07	11.76	33.12	0.00	100	111 PEAK																														
Avg	<p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91280-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.400kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5376.64</td> <td>46.24</td> <td>54.00</td> <td>-7.76</td> <td>34.49</td> <td>33.05</td> <td>11.83</td> <td>33.13</td> <td>0.00</td> <td>100</td> <td>111 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5376.64	46.24	54.00	-7.76	34.49	33.05	11.83	33.13	0.00	100	111 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																
1 5376.64	46.24	54.00	-7.76	34.49	33.05	11.83	33.13	0.00	100	111 AVERAGE																														



Mode	90																																																																																																	
	Band Edge - L																																																																																																	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_52/38 RU_5300MHz																																																																																																	
ANT	2																																																																																																	
Pol.	Vertical	Fundamental																																																																																																
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5001.00</td> <td>55.21</td> <td>74.00</td> <td>-18.79</td> <td>44.43</td> <td>33.39</td> <td>10.39</td> <td>33.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>307</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>86 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5001.00	55.21	74.00	-18.79	44.43	33.39	10.39	33.00							0.00	307								86 PEAK	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5300.00</td> <td>96.54</td> <td>-----</td> <td>-----</td> <td>85.25</td> <td>33.02</td> <td>11.37</td> <td>33.10</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>307</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>86 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5300.00	96.54	-----	-----	85.25	33.02	11.37	33.10							0.00	307								86 PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 5001.00	55.21	74.00	-18.79	44.43	33.39	10.39	33.00																																																																																											
						0.00	307																																																																																											
							86 PEAK																																																																																											
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 5300.00	96.54	-----	-----	85.25	33.02	11.37	33.10																																																																																											
						0.00	307																																																																																											
							86 PEAK																																																																																											
Avg	<p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5143.40</td> <td>46.41</td> <td>54.00</td> <td>-7.59</td> <td>35.38</td> <td>33.37</td> <td>10.71</td> <td>33.05</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>307</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>86 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5143.40	46.41	54.00	-7.59	35.38	33.37	10.71	33.05							0.00	307								86 AVERAGE	<p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5300.00</td> <td>91.39</td> <td>-----</td> <td>-----</td> <td>80.10</td> <td>33.02</td> <td>11.37</td> <td>33.10</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>307</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>86 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5300.00	91.39	-----	-----	80.10	33.02	11.37	33.10							0.00	307								86 AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 5143.40	46.41	54.00	-7.59	35.38	33.37	10.71	33.05																																																																																											
						0.00	307																																																																																											
							86 AVERAGE																																																																																											
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 5300.00	91.39	-----	-----	80.10	33.02	11.37	33.10																																																																																											
						0.00	307																																																																																											
							86 AVERAGE																																																																																											



Mode	90																																														
	Band Edge - R																																														
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_52/38 RU_5300MHz																																														
ANT	2																																														
Pol.	Vertical	Fundamental																																													
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PEAK_BE_74</p> <p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91280-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5434.24</td> <td>54.41</td> <td>74.00</td> <td>-19.59</td> <td>42.79</td> <td>33.00</td> <td>11.77</td> <td>33.15</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>307 86 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5434.24	54.41	74.00	-19.59	42.79	33.00	11.77	33.15	0.00									307 86 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 5434.24	54.41	74.00	-19.59	42.79	33.00	11.77	33.15	0.00																																							
								307 86 PEAK																																							
Avg	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>AVG_BE_54</p> <p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91280-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5412.48</td> <td>46.17</td> <td>54.00</td> <td>-7.83</td> <td>34.42</td> <td>33.00</td> <td>11.89</td> <td>33.14</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>307 86 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5412.48	46.17	54.00	-7.83	34.42	33.00	11.89	33.14	0.00									307 86 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 5412.48	46.17	54.00	-7.83	34.42	33.00	11.89	33.14	0.00																																							
								307 86 AVERAGE																																							







Mode	90																																																																																																																																																													
	Harmonic																																																																																																																																																													
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_52/38 RU_5300MHz																																																																																																																																																													
ANT	2																																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																																												
Peak Avg	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7066.00</td> <td>53.16</td> <td>68.20</td> <td>-15.04</td> <td>67.74</td> <td>36.40</td> <td>13.94</td> <td>65.83</td> <td>0.91</td> <td>392</td> <td>283</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10600.00</td> <td>47.35</td> <td>74.00</td> <td>-26.65</td> <td>58.12</td> <td>39.10</td> <td>17.21</td> <td>67.34</td> <td>0.26</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15900.00</td> <td>49.54</td> <td>74.00</td> <td>-24.46</td> <td>56.53</td> <td>37.90</td> <td>22.21</td> <td>67.47</td> <td>0.37</td> <td>133</td> <td>88</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>15900.00</td> <td>39.73</td> <td>54.00</td> <td>-14.27</td> <td>46.72</td> <td>37.90</td> <td>22.21</td> <td>67.47</td> <td>0.37</td> <td>133</td> <td>88</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7066.00	53.16	68.20	-15.04	67.74	36.40	13.94	65.83	0.91	392	283	Peak	2	10600.00	47.35	74.00	-26.65	58.12	39.10	17.21	67.34	0.26	--	--	PEAK	3	15900.00	49.54	74.00	-24.46	56.53	37.90	22.21	67.47	0.37	133	88	PEAK	4	15900.00	39.73	54.00	-14.27	46.72	37.90	22.21	67.47	0.37	133	88	Average	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7066.00</td> <td>53.31</td> <td>68.20</td> <td>-14.89</td> <td>67.89</td> <td>36.40</td> <td>13.94</td> <td>65.83</td> <td>0.91</td> <td>100</td> <td>199</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10600.00</td> <td>47.62</td> <td>74.00</td> <td>-26.38</td> <td>58.39</td> <td>39.10</td> <td>17.21</td> <td>67.34</td> <td>0.26</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15900.00</td> <td>49.11</td> <td>74.00</td> <td>-24.89</td> <td>56.10</td> <td>37.90</td> <td>22.21</td> <td>67.47</td> <td>0.37</td> <td>211</td> <td>140</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>15900.00</td> <td>39.23</td> <td>54.00</td> <td>-14.77</td> <td>46.22</td> <td>37.90</td> <td>22.21</td> <td>67.47</td> <td>0.37</td> <td>211</td> <td>140</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7066.00	53.31	68.20	-14.89	67.89	36.40	13.94	65.83	0.91	100	199	Peak	2	10600.00	47.62	74.00	-26.38	58.39	39.10	17.21	67.34	0.26	--	--	PEAK	3	15900.00	49.11	74.00	-24.89	56.10	37.90	22.21	67.47	0.37	211	140	PEAK	4	15900.00	39.23	54.00	-14.77	46.22	37.90	22.21	67.47	0.37	211	140	Average
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																			
1	7066.00	53.16	68.20	-15.04	67.74	36.40	13.94	65.83	0.91	392	283	Peak																																																																																																																																																		
2	10600.00	47.35	74.00	-26.65	58.12	39.10	17.21	67.34	0.26	--	--	PEAK																																																																																																																																																		
3	15900.00	49.54	74.00	-24.46	56.53	37.90	22.21	67.47	0.37	133	88	PEAK																																																																																																																																																		
4	15900.00	39.73	54.00	-14.27	46.72	37.90	22.21	67.47	0.37	133	88	Average																																																																																																																																																		
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																			
1	7066.00	53.31	68.20	-14.89	67.89	36.40	13.94	65.83	0.91	100	199	Peak																																																																																																																																																		
2	10600.00	47.62	74.00	-26.38	58.39	39.10	17.21	67.34	0.26	--	--	PEAK																																																																																																																																																		
3	15900.00	49.11	74.00	-24.89	56.10	37.90	22.21	67.47	0.37	211	140	PEAK																																																																																																																																																		
4	15900.00	39.23	54.00	-14.77	46.22	37.90	22.21	67.47	0.37	211	140	Average																																																																																																																																																		



Mode	90	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_52/38 RU_5300MHz	
ANT	2	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	<p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 HORIZONTAL</p>	<p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 VERTICAL</p>
	<p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 HORIZONTAL</p>	<p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 VERTICAL</p>

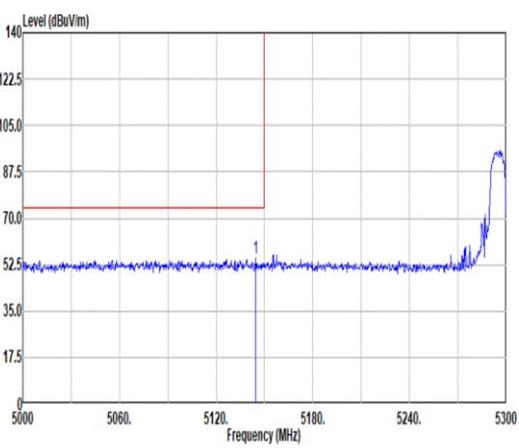
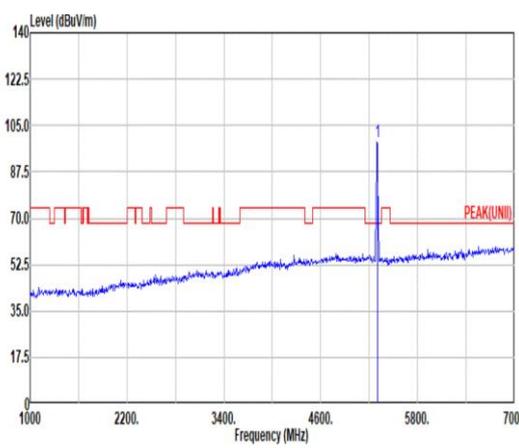
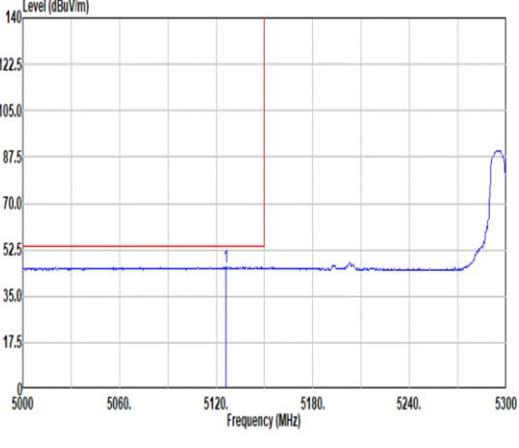
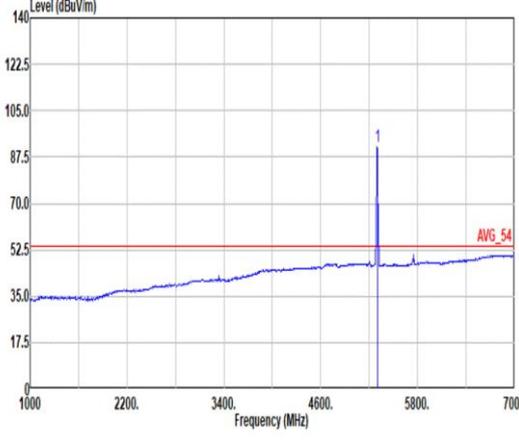


Mode	91																																																																															
	Band Edge - L																																																																															
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_106/53 RU_5300MHz																																																																															
ANT	2																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	 <p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5144.60</td> <td>54.82</td> <td>74.00</td> <td>-19.18</td> <td>43.78</td> <td>33.38</td> <td>10.71</td> <td>33.05</td> <td>0.00</td> <td>100</td> <td>114 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5144.60	54.82	74.00	-19.18	43.78	33.38	10.71	33.05	0.00	100	114 PEAK	 <p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5300.00</td> <td>98.72</td> <td>-----</td> <td>-----</td> <td>87.43</td> <td>33.02</td> <td>11.37</td> <td>33.10</td> <td>0.00</td> <td>100</td> <td>114 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5300.00	98.72	-----	-----	87.43	33.02	11.37	33.10	0.00	100	114 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5144.60	54.82	74.00	-19.18	43.78	33.38	10.71	33.05	0.00	100	114 PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5300.00	98.72	-----	-----	87.43	33.02	11.37	33.10	0.00	100	114 PEAK																																																																						
Avg	 <p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5126.00</td> <td>46.18</td> <td>54.00</td> <td>-7.82</td> <td>35.25</td> <td>33.30</td> <td>10.67</td> <td>33.04</td> <td>0.00</td> <td>100</td> <td>114 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5126.00	46.18	54.00	-7.82	35.25	33.30	10.67	33.04	0.00	100	114 AVERAGE	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5300.00</td> <td>91.29</td> <td>-----</td> <td>-----</td> <td>80.00</td> <td>33.02</td> <td>11.37</td> <td>33.10</td> <td>0.00</td> <td>100</td> <td>114 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5300.00	91.29	-----	-----	80.00	33.02	11.37	33.10	0.00	100	114 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5126.00	46.18	54.00	-7.82	35.25	33.30	10.67	33.04	0.00	100	114 AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5300.00	91.29	-----	-----	80.00	33.02	11.37	33.10	0.00	100	114 AVERAGE																																																																						



Mode	91																																									
	Band Edge - R																																									
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_106/53 RU_5300MHz																																									
ANT	2																																									
Pol.	Horizontal	Fundamental																																								
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91280-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.00</td> <td>54.23</td> <td>74.00</td> <td>-19.77</td> <td>42.72</td> <td>33.03</td> <td>11.64</td> <td>33.16</td> <td>0.00</td> <td>100</td> <td>114</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5456.00	54.23	74.00	-19.77	42.72	33.03	11.64	33.16	0.00	100	114	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																		
1	5456.00	54.23	74.00	-19.77	42.72	33.03	11.64	33.16	0.00	100	114	PEAK																														
Avg	<p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91280-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5379.20</td> <td>45.62</td> <td>54.00</td> <td>-8.38</td> <td>33.87</td> <td>33.04</td> <td>11.84</td> <td>33.13</td> <td>0.00</td> <td>100</td> <td>114</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5379.20	45.62	54.00	-8.38	33.87	33.04	11.84	33.13	0.00	100	114	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																		
1	5379.20	45.62	54.00	-8.38	33.87	33.04	11.84	33.13	0.00	100	114	AVERAGE																														

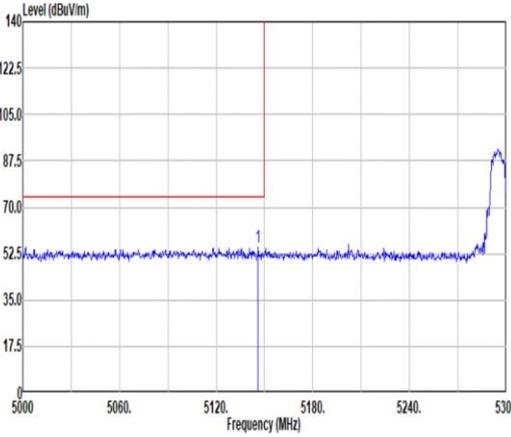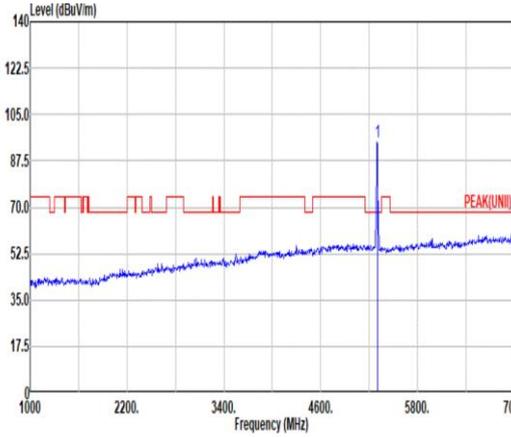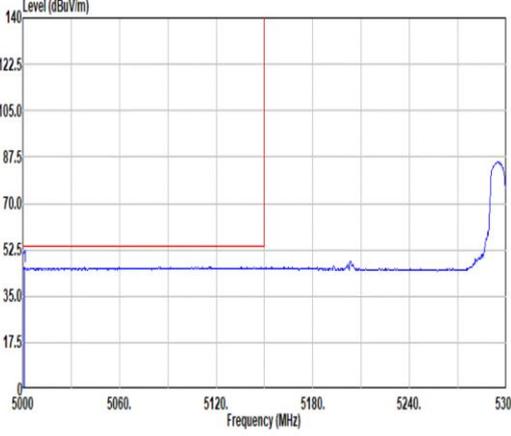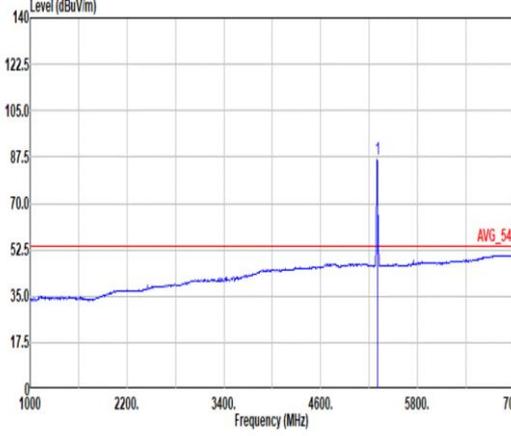

Mode	91																																																																															
	Band Edge - L																																																																															
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_106/53 RU_5300MHz																																																																															
ANT	2																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	 <p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5146.10</td> <td>54.89</td> <td>74.00</td> <td>-19.11</td> <td>43.05</td> <td>33.38</td> <td>10.71</td> <td>33.05</td> <td>0.00</td> <td>346</td> <td>90 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5146.10	54.89	74.00	-19.11	43.05	33.38	10.71	33.05	0.00	346	90 PEAK	 <p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5300.00</td> <td>94.63</td> <td>-----</td> <td>-----</td> <td>83.34</td> <td>33.02</td> <td>11.37</td> <td>33.10</td> <td>0.00</td> <td>346</td> <td>90 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5300.00	94.63	-----	-----	83.34	33.02	11.37	33.10	0.00	346	90 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5146.10	54.89	74.00	-19.11	43.05	33.38	10.71	33.05	0.00	346	90 PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5300.00	94.63	-----	-----	83.34	33.02	11.37	33.10	0.00	346	90 PEAK																																																																						
Avg	 <p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5001.20</td> <td>45.93</td> <td>54.00</td> <td>-8.07</td> <td>35.14</td> <td>33.40</td> <td>10.39</td> <td>33.00</td> <td>0.00</td> <td>346</td> <td>90 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5001.20	45.93	54.00	-8.07	35.14	33.40	10.39	33.00	0.00	346	90 AVERAGE	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5300.00</td> <td>86.88</td> <td>-----</td> <td>-----</td> <td>75.59</td> <td>33.02</td> <td>11.37</td> <td>33.10</td> <td>0.00</td> <td>346</td> <td>90 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5300.00	86.88	-----	-----	75.59	33.02	11.37	33.10	0.00	346	90 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5001.20	45.93	54.00	-8.07	35.14	33.40	10.39	33.00	0.00	346	90 AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5300.00	86.88	-----	-----	75.59	33.02	11.37	33.10	0.00	346	90 AVERAGE																																																																						



Mode	91																																									
	Band Edge - R																																									
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_106/53 RU_5300MHz																																									
ANT	2																																									
Pol.	Vertical	Fundamental																																								
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PEAK_BE_74</p> <p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91280-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5388.16</td> <td>87.5</td> <td>54.06</td> <td>74.00</td> <td>-19.94</td> <td>42.28</td> <td>33.02</td> <td>11.89</td> <td>33.13</td> <td>0.00</td> <td>346</td> <td>90</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5388.16	87.5	54.06	74.00	-19.94	42.28	33.02	11.89	33.13	0.00	346	90	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																		
1 5388.16	87.5	54.06	74.00	-19.94	42.28	33.02	11.89	33.13	0.00	346	90	PEAK																														
Avg	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>AVG_BE_54</p> <p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91280-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5414.56</td> <td>45.68</td> <td>45.68</td> <td>54.00</td> <td>-8.32</td> <td>33.94</td> <td>33.00</td> <td>11.88</td> <td>33.14</td> <td>0.00</td> <td>346</td> <td>90</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5414.56	45.68	45.68	54.00	-8.32	33.94	33.00	11.88	33.14	0.00	346	90	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																		
1 5414.56	45.68	45.68	54.00	-8.32	33.94	33.00	11.88	33.14	0.00	346	90	AVERAGE																														



Mode	91																																																																																																																																																													
	Harmonic																																																																																																																																																													
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_106/53 RU_5300MHz																																																																																																																																																													
ANT	2																																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																																												
Peak Avg	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7066.00</td> <td>53.92</td> <td>68.20</td> <td>-14.28</td> <td>68.50</td> <td>36.40</td> <td>13.94</td> <td>65.83</td> <td>0.91</td> <td>390</td> <td>271</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10600.00</td> <td>47.08</td> <td>74.00</td> <td>-26.92</td> <td>57.05</td> <td>39.10</td> <td>17.21</td> <td>67.34</td> <td>0.26</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15900.00</td> <td>49.37</td> <td>74.00</td> <td>-24.63</td> <td>56.36</td> <td>37.90</td> <td>22.21</td> <td>67.47</td> <td>0.37</td> <td>133</td> <td>89</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>15900.00</td> <td>39.52</td> <td>54.00</td> <td>-14.48</td> <td>46.51</td> <td>37.90</td> <td>22.21</td> <td>67.47</td> <td>0.37</td> <td>133</td> <td>89</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7066.00	53.92	68.20	-14.28	68.50	36.40	13.94	65.83	0.91	390	271	Peak	2	10600.00	47.08	74.00	-26.92	57.05	39.10	17.21	67.34	0.26	--	--	PEAK	3	15900.00	49.37	74.00	-24.63	56.36	37.90	22.21	67.47	0.37	133	89	PEAK	4	15900.00	39.52	54.00	-14.48	46.51	37.90	22.21	67.47	0.37	133	89	Average	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7066.00</td> <td>53.04</td> <td>68.20</td> <td>-14.36</td> <td>68.42</td> <td>36.40</td> <td>13.94</td> <td>65.83</td> <td>0.91</td> <td>100</td> <td>199</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10600.00</td> <td>47.42</td> <td>74.00</td> <td>-26.58</td> <td>58.19</td> <td>39.10</td> <td>17.21</td> <td>67.34</td> <td>0.26</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15900.00</td> <td>48.39</td> <td>74.00</td> <td>-25.61</td> <td>55.38</td> <td>37.90</td> <td>22.21</td> <td>67.47</td> <td>0.37</td> <td>215</td> <td>132</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>15900.00</td> <td>38.62</td> <td>54.00</td> <td>-15.38</td> <td>45.61</td> <td>37.90</td> <td>22.21</td> <td>67.47</td> <td>0.37</td> <td>215</td> <td>132</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7066.00	53.04	68.20	-14.36	68.42	36.40	13.94	65.83	0.91	100	199	Peak	2	10600.00	47.42	74.00	-26.58	58.19	39.10	17.21	67.34	0.26	--	--	PEAK	3	15900.00	48.39	74.00	-25.61	55.38	37.90	22.21	67.47	0.37	215	132	PEAK	4	15900.00	38.62	54.00	-15.38	45.61	37.90	22.21	67.47	0.37	215	132	Average
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																			
1	7066.00	53.92	68.20	-14.28	68.50	36.40	13.94	65.83	0.91	390	271	Peak																																																																																																																																																		
2	10600.00	47.08	74.00	-26.92	57.05	39.10	17.21	67.34	0.26	--	--	PEAK																																																																																																																																																		
3	15900.00	49.37	74.00	-24.63	56.36	37.90	22.21	67.47	0.37	133	89	PEAK																																																																																																																																																		
4	15900.00	39.52	54.00	-14.48	46.51	37.90	22.21	67.47	0.37	133	89	Average																																																																																																																																																		
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																			
1	7066.00	53.04	68.20	-14.36	68.42	36.40	13.94	65.83	0.91	100	199	Peak																																																																																																																																																		
2	10600.00	47.42	74.00	-26.58	58.19	39.10	17.21	67.34	0.26	--	--	PEAK																																																																																																																																																		
3	15900.00	48.39	74.00	-25.61	55.38	37.90	22.21	67.47	0.37	215	132	PEAK																																																																																																																																																		
4	15900.00	38.62	54.00	-15.38	45.61	37.90	22.21	67.47	0.37	215	132	Average																																																																																																																																																		



Mode	91	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_106/53 RU_5300MHz	
ANT	2	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	<p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 HORIZONTAL</p>	<p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 VERTICAL</p>
	17.7G ~18G Avg	<p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 HORIZONTAL</p>



Mode	92																																																																																	
	Band Edge																																																																																	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_26/8 RU_5320MHz																																																																																	
ANT	2																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5424.86</td> <td>53.86</td> <td>74.00</td> <td>-20.14</td> <td>42.18</td> <td>33.00</td> <td>11.82</td> <td>33.14</td> <td>0.00</td> <td>100</td> <td>111</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5424.86	53.86	74.00	-20.14	42.18	33.00	11.82	33.14	0.00	100	111	PEAK	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>101.74</td> <td>-----</td> <td>-----</td> <td>90.21</td> <td>33.06</td> <td>11.58</td> <td>33.11</td> <td>0.00</td> <td>100</td> <td>111</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5320.00	101.74	-----	-----	90.21	33.06	11.58	33.11	0.00	100	111	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5424.86	53.86	74.00	-20.14	42.18	33.00	11.82	33.14	0.00	100	111	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5320.00	101.74	-----	-----	90.21	33.06	11.58	33.11	0.00	100	111	PEAK																																																																						
Avg	<p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5362.28</td> <td>46.36</td> <td>54.00</td> <td>-7.64</td> <td>34.65</td> <td>33.00</td> <td>11.75</td> <td>33.12</td> <td>0.00</td> <td>100</td> <td>111</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5362.28	46.36	54.00	-7.64	34.65	33.00	11.75	33.12	0.00	100	111	AVERAGE	<p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>96.19</td> <td>-----</td> <td>-----</td> <td>84.71</td> <td>33.05</td> <td>11.54</td> <td>33.11</td> <td>0.00</td> <td>100</td> <td>111</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5320.00	96.19	-----	-----	84.71	33.05	11.54	33.11	0.00	100	111	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5362.28	46.36	54.00	-7.64	34.65	33.00	11.75	33.12	0.00	100	111	AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5320.00	96.19	-----	-----	84.71	33.05	11.54	33.11	0.00	100	111	AVERAGE																																																																						







Mode	92																																																																																			
	Band Edge																																																																																			
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_26/8 RU_5320MHz																																																																																			
ANT	2																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5376.00</td> <td>54.01</td> <td>74.00</td> <td>-19.99</td> <td>42.26</td> <td>33.04</td> <td>11.84</td> <td>33.13</td> <td>0.00</td> <td>324</td> <td>93</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5376.00	54.01	74.00	-19.99	42.26	33.04	11.84	33.13	0.00	324	93	PEAK	<p>Site : 03CH12-HY Condition: PEAK(UNI) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>98.31</td> <td>-----</td> <td>-----</td> <td>86.83</td> <td>33.05</td> <td>11.54</td> <td>33.11</td> <td>0.00</td> <td>324</td> <td>93</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	98.31	-----	-----	86.83	33.05	11.54	33.11	0.00	324	93	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5376.00	54.01	74.00	-19.99	42.26	33.04	11.84	33.13	0.00	324	93	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5320.00	98.31	-----	-----	86.83	33.05	11.54	33.11	0.00	324	93	PEAK																																																																								
Avg	<p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5406.00</td> <td>46.10</td> <td>54.00</td> <td>-7.90</td> <td>34.32</td> <td>33.00</td> <td>11.92</td> <td>33.14</td> <td>0.00</td> <td>324</td> <td>93</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5406.00	46.10	54.00	-7.90	34.32	33.00	11.92	33.14	0.00	324	93	AVERAGE	<p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>91.71</td> <td>-----</td> <td>-----</td> <td>80.23</td> <td>33.05</td> <td>11.54</td> <td>33.11</td> <td>0.00</td> <td>324</td> <td>93</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	91.71	-----	-----	80.23	33.05	11.54	33.11	0.00	324	93	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5406.00	46.10	54.00	-7.90	34.32	33.00	11.92	33.14	0.00	324	93	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5320.00	91.71	-----	-----	80.23	33.05	11.54	33.11	0.00	324	93	AVERAGE																																																																								



Mode	92																																																																																																																																																
	Harmonic																																																																																																																																																
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_26/8 RU_5320MHz																																																																																																																																																
ANT	2																																																																																																																																																
Pol.	Horizontal	Vertical																																																																																																																																															
Peak Avg	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7093.00</td> <td>52.59</td> <td>68.20</td> <td>-15.61</td> <td>67.03</td> <td>36.56</td> <td>13.94</td> <td>65.85</td> <td>0.91</td> <td>386</td> <td>204</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>46.87</td> <td>74.00</td> <td>-27.13</td> <td>57.51</td> <td>39.18</td> <td>17.23</td> <td>67.31</td> <td>0.26</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15960.00</td> <td>49.31</td> <td>74.00</td> <td>-24.69</td> <td>56.43</td> <td>37.76</td> <td>22.26</td> <td>67.50</td> <td>0.36</td> <td>139</td> <td>72</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>15960.00</td> <td>39.45</td> <td>54.00</td> <td>-14.55</td> <td>46.57</td> <td>37.76</td> <td>22.26</td> <td>67.50</td> <td>0.36</td> <td>139</td> <td>72</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7093.00	52.59	68.20	-15.61	67.03	36.56	13.94	65.85	0.91	386	204	Peak	2	10640.00	46.87	74.00	-27.13	57.51	39.18	17.23	67.31	0.26	--	--	PEAK	3	15960.00	49.31	74.00	-24.69	56.43	37.76	22.26	67.50	0.36	139	72	PEAK	4	15960.00	39.45	54.00	-14.55	46.57	37.76	22.26	67.50	0.36	139	72	Average	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7093.00</td> <td>52.47</td> <td>68.20</td> <td>-15.73</td> <td>66.91</td> <td>36.56</td> <td>13.94</td> <td>65.85</td> <td>0.91</td> <td>100</td> <td>199</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>46.61</td> <td>74.00</td> <td>-27.39</td> <td>57.25</td> <td>39.18</td> <td>17.23</td> <td>67.31</td> <td>0.26</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15960.00</td> <td>47.95</td> <td>74.00</td> <td>-26.05</td> <td>55.07</td> <td>37.76</td> <td>22.26</td> <td>67.50</td> <td>0.36</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7093.00	52.47	68.20	-15.73	66.91	36.56	13.94	65.85	0.91	100	199	Peak	2	10640.00	46.61	74.00	-27.39	57.25	39.18	17.23	67.31	0.26	--	--	PEAK	3	15960.00	47.95	74.00	-26.05	55.07	37.76	22.26	67.50	0.36	--	--	PEAK
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																						
1	7093.00	52.59	68.20	-15.61	67.03	36.56	13.94	65.85	0.91	386	204	Peak																																																																																																																																					
2	10640.00	46.87	74.00	-27.13	57.51	39.18	17.23	67.31	0.26	--	--	PEAK																																																																																																																																					
3	15960.00	49.31	74.00	-24.69	56.43	37.76	22.26	67.50	0.36	139	72	PEAK																																																																																																																																					
4	15960.00	39.45	54.00	-14.55	46.57	37.76	22.26	67.50	0.36	139	72	Average																																																																																																																																					
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																						
1	7093.00	52.47	68.20	-15.73	66.91	36.56	13.94	65.85	0.91	100	199	Peak																																																																																																																																					
2	10640.00	46.61	74.00	-27.39	57.25	39.18	17.23	67.31	0.26	--	--	PEAK																																																																																																																																					
3	15960.00	47.95	74.00	-26.05	55.07	37.76	22.26	67.50	0.36	--	--	PEAK																																																																																																																																					

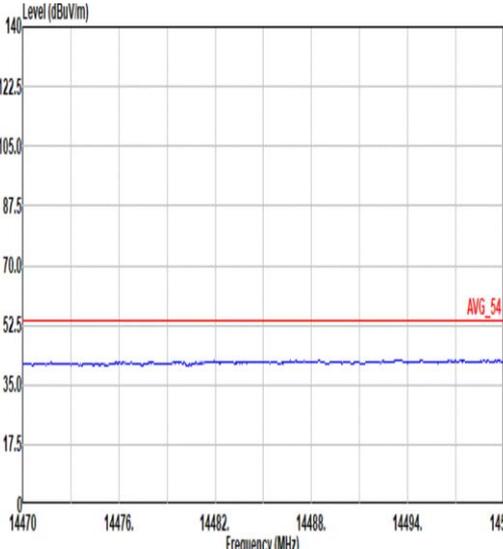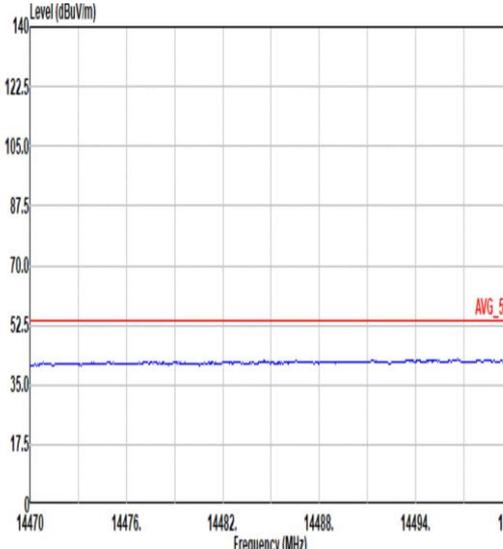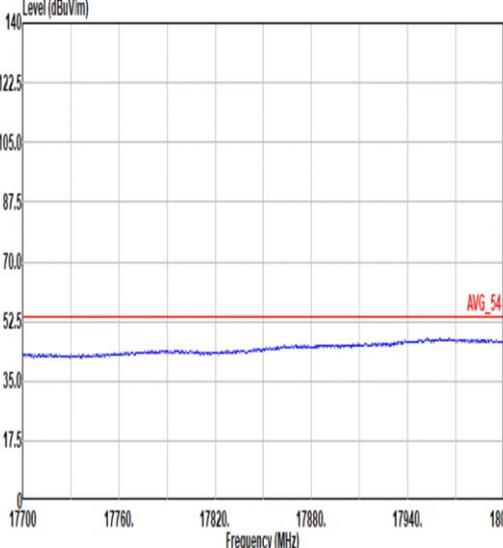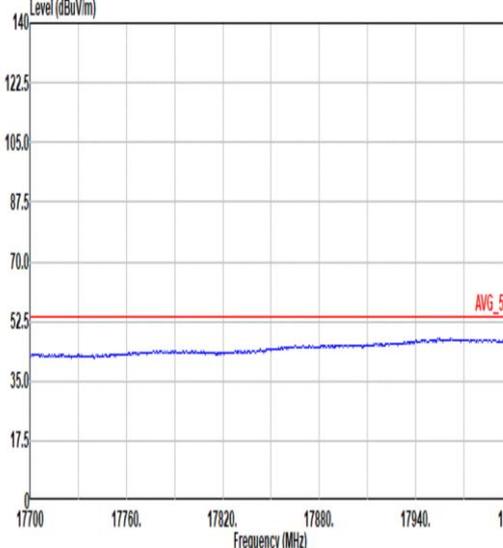

Mode	92	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_26/8 RU_5320MHz	
ANT	2	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 HORIZONTAL</p>	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 VERTICAL</p>
17.7G ~18G Avg	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 HORIZONTAL</p>	 <p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 VERTICAL</p>



Mode	93																																																																													
	Band Edge																																																																													
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_52/40 RU_5320MHz																																																																													
ANT	2																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5454.68</td> <td>54.30</td> <td>74.00</td> <td>-19.70</td> <td>42.78</td> <td>33.02</td> <td>11.65</td> <td>33.15</td> <td>0.00</td> <td>100</td> <td>124 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5454.68	54.30	74.00	-19.70	42.78	33.02	11.65	33.15	0.00	100	124 PEAK	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>100.40</td> <td>-----</td> <td>-----</td> <td>88.92</td> <td>33.05</td> <td>11.54</td> <td>33.11</td> <td>0.00</td> <td>100</td> <td>124 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5320.00	100.40	-----	-----	88.92	33.05	11.54	33.11	0.00	100	124 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																						
1 5454.68	54.30	74.00	-19.70	42.78	33.02	11.65	33.15	0.00	100	124 PEAK																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																						
1 5320.00	100.40	-----	-----	88.92	33.05	11.54	33.11	0.00	100	124 PEAK																																																																				
Avg	<p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5406.94</td> <td>46.00</td> <td>54.00</td> <td>-7.92</td> <td>34.30</td> <td>33.00</td> <td>11.92</td> <td>33.14</td> <td>0.00</td> <td>100</td> <td>124 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5406.94	46.00	54.00	-7.92	34.30	33.00	11.92	33.14	0.00	100	124 AVERAGE	<p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>94.94</td> <td>-----</td> <td>-----</td> <td>83.46</td> <td>33.05</td> <td>11.54</td> <td>33.11</td> <td>0.00</td> <td>100</td> <td>124 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5320.00	94.94	-----	-----	83.46	33.05	11.54	33.11	0.00	100	124 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																						
1 5406.94	46.00	54.00	-7.92	34.30	33.00	11.92	33.14	0.00	100	124 AVERAGE																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																						
1 5320.00	94.94	-----	-----	83.46	33.05	11.54	33.11	0.00	100	124 AVERAGE																																																																				



Mode	93																																																																									
	Band Edge																																																																									
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_52/40 RU_5320MHz																																																																									
ANT	2																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5365.22</td> <td>54.20</td> <td>74.00</td> <td>-19.80</td> <td>42.49</td> <td>33.07</td> <td>11.76</td> <td>33.12</td> <td>0.00</td> <td>269</td> <td>101</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5365.22	54.20	74.00	-19.80	42.49	33.07	11.76	33.12	0.00	269	101	PEAK	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>101.05</td> <td>-----</td> <td>-----</td> <td>89.57</td> <td>33.05</td> <td>11.54</td> <td>33.11</td> <td>0.00</td> <td>269</td> <td>101</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5320.00	101.05	-----	-----	89.57	33.05	11.54	33.11	0.00	269	101	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1 5365.22	54.20	74.00	-19.80	42.49	33.07	11.76	33.12	0.00	269	101	PEAK																																																															
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1 5320.00	101.05	-----	-----	89.57	33.05	11.54	33.11	0.00	269	101	PEAK																																																															
Avg	<p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5402.60</td> <td>46.23</td> <td>54.00</td> <td>-7.77</td> <td>34.42</td> <td>33.00</td> <td>11.95</td> <td>33.14</td> <td>0.00</td> <td>269</td> <td>101</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5402.60	46.23	54.00	-7.77	34.42	33.00	11.95	33.14	0.00	269	101	AVERAGE	<p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>93.26</td> <td>-----</td> <td>-----</td> <td>81.78</td> <td>33.05</td> <td>11.54</td> <td>33.11</td> <td>0.00</td> <td>269</td> <td>101</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5320.00	93.26	-----	-----	81.78	33.05	11.54	33.11	0.00	269	101	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1 5402.60	46.23	54.00	-7.77	34.42	33.00	11.95	33.14	0.00	269	101	AVERAGE																																																															
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1 5320.00	93.26	-----	-----	81.78	33.05	11.54	33.11	0.00	269	101	AVERAGE																																																															



Mode	93																																																																																																																																																													
	Harmonic																																																																																																																																																													
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_52/40 RU_5320MHz																																																																																																																																																													
ANT	2																																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																																												
Peak Avg	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7093.00</td> <td>52.99</td> <td>68.20</td> <td>-15.21</td> <td>67.43</td> <td>36.56</td> <td>13.94</td> <td>65.85</td> <td>0.91</td> <td>111</td> <td>109</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>47.35</td> <td>74.00</td> <td>-26.65</td> <td>57.99</td> <td>39.18</td> <td>17.23</td> <td>67.31</td> <td>0.26</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>15960.00</td> <td>49.09</td> <td>74.00</td> <td>-24.91</td> <td>56.21</td> <td>37.76</td> <td>22.26</td> <td>67.50</td> <td>0.36</td> <td>113</td> <td>100</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>15960.00</td> <td>39.99</td> <td>54.00</td> <td>-14.01</td> <td>47.11</td> <td>37.76</td> <td>22.26</td> <td>67.50</td> <td>0.36</td> <td>113</td> <td>100</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7093.00	52.99	68.20	-15.21	67.43	36.56	13.94	65.85	0.91	111	109	Peak	2	10640.00	47.35	74.00	-26.65	57.99	39.18	17.23	67.31	0.26	--	--	Peak	3	15960.00	49.09	74.00	-24.91	56.21	37.76	22.26	67.50	0.36	113	100	PEAK	4	15960.00	39.99	54.00	-14.01	47.11	37.76	22.26	67.50	0.36	113	100	Average	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7093.00</td> <td>55.00</td> <td>68.20</td> <td>-12.40</td> <td>70.21</td> <td>36.59</td> <td>13.94</td> <td>65.85</td> <td>0.91</td> <td>100</td> <td>210</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>47.05</td> <td>74.00</td> <td>-26.95</td> <td>57.69</td> <td>39.18</td> <td>17.23</td> <td>67.31</td> <td>0.26</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15960.00</td> <td>49.87</td> <td>74.00</td> <td>-24.13</td> <td>56.99</td> <td>37.76</td> <td>22.26</td> <td>67.50</td> <td>0.36</td> <td>110</td> <td>213</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>15960.00</td> <td>40.75</td> <td>54.00</td> <td>-13.25</td> <td>47.87</td> <td>37.76</td> <td>22.26</td> <td>67.50</td> <td>0.36</td> <td>110</td> <td>213</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7093.00	55.00	68.20	-12.40	70.21	36.59	13.94	65.85	0.91	100	210	Peak	2	10640.00	47.05	74.00	-26.95	57.69	39.18	17.23	67.31	0.26	--	--	PEAK	3	15960.00	49.87	74.00	-24.13	56.99	37.76	22.26	67.50	0.36	110	213	PEAK	4	15960.00	40.75	54.00	-13.25	47.87	37.76	22.26	67.50	0.36	110	213	Average
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																																																		
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																			
1	7093.00	52.99	68.20	-15.21	67.43	36.56	13.94	65.85	0.91	111	109	Peak																																																																																																																																																		
2	10640.00	47.35	74.00	-26.65	57.99	39.18	17.23	67.31	0.26	--	--	Peak																																																																																																																																																		
3	15960.00	49.09	74.00	-24.91	56.21	37.76	22.26	67.50	0.36	113	100	PEAK																																																																																																																																																		
4	15960.00	39.99	54.00	-14.01	47.11	37.76	22.26	67.50	0.36	113	100	Average																																																																																																																																																		
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																																																		
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																			
1	7093.00	55.00	68.20	-12.40	70.21	36.59	13.94	65.85	0.91	100	210	Peak																																																																																																																																																		
2	10640.00	47.05	74.00	-26.95	57.69	39.18	17.23	67.31	0.26	--	--	PEAK																																																																																																																																																		
3	15960.00	49.87	74.00	-24.13	56.99	37.76	22.26	67.50	0.36	110	213	PEAK																																																																																																																																																		
4	15960.00	40.75	54.00	-13.25	47.87	37.76	22.26	67.50	0.36	110	213	Average																																																																																																																																																		



Mode	93	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_52/40 RU_5320MHz	
ANT	2	
Pol.	Horizontal	Vertical
<p>14.47G ~14.5G Avg</p>	<p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 HORIZONTAL</p>	<p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 VERTICAL</p>
<p>17.7G ~18G Avg</p>	<p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 HORIZONTAL</p>	<p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 VERTICAL</p>



Mode	94																																																																			
	Band Edge																																																																			
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_106/54 RU_5320MHz																																																																			
ANT	2																																																																			
Pol.	Horizontal	Fundamental																																																																		
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5391.12</td> <td>53.94</td> <td>74.00</td> <td>-20.06</td> <td>42.14</td> <td>33.02</td> <td>11.91</td> <td>33.13</td> <td>0.00</td> <td>100</td> <td>111</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	1	5391.12	53.94	74.00	-20.06	42.14	33.02	11.91	33.13	0.00	100	111	PEAK	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>98.06</td> <td>-----</td> <td>-----</td> <td>86.58</td> <td>33.05</td> <td>11.54</td> <td>33.11</td> <td>0.00</td> <td>100</td> <td>111</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	1	5320.00	98.06	-----	-----	86.58	33.05	11.54	33.11	0.00	100	111	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg																																																									
1	5391.12	53.94	74.00	-20.06	42.14	33.02	11.91	33.13	0.00	100	111	PEAK																																																								
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg																																																									
1	5320.00	98.06	-----	-----	86.58	33.05	11.54	33.11	0.00	100	111	PEAK																																																								
Avg	<p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5406.24</td> <td>45.72</td> <td>54.00</td> <td>-8.28</td> <td>33.93</td> <td>33.00</td> <td>11.93</td> <td>33.14</td> <td>0.00</td> <td>100</td> <td>111</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	1	5406.24	45.72	54.00	-8.28	33.93	33.00	11.93	33.14	0.00	100	111	AVERAGE	<p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>91.01</td> <td>-----</td> <td>-----</td> <td>79.53</td> <td>33.05</td> <td>11.54</td> <td>33.11</td> <td>0.00</td> <td>100</td> <td>111</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	1	5320.00	91.01	-----	-----	79.53	33.05	11.54	33.11	0.00	100	111	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg																																																									
1	5406.24	45.72	54.00	-8.28	33.93	33.00	11.93	33.14	0.00	100	111	AVERAGE																																																								
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg																																																									
1	5320.00	91.01	-----	-----	79.53	33.05	11.54	33.11	0.00	100	111	AVERAGE																																																								



Mode	94																																																																															
	Band Edge																																																																															
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_106/54 RU_5320MHz																																																																															
ANT	2																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<p>Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5365.08</td> <td>53.61</td> <td>74.00</td> <td>-20.39</td> <td>41.90</td> <td>33.07</td> <td>11.76</td> <td>33.12</td> <td>0.00</td> <td>341</td> <td>97</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5365.08	53.61	74.00	-20.39	41.90	33.07	11.76	33.12	0.00	341	97	PEAK	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>94.17</td> <td>-----</td> <td>-----</td> <td>82.69</td> <td>33.05</td> <td>11.54</td> <td>33.11</td> <td>0.00</td> <td>341</td> <td>97</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	94.17	-----	-----	82.69	33.05	11.54	33.11	0.00	341	97	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5365.08	53.61	74.00	-20.39	41.90	33.07	11.76	33.12	0.00	341	97	PEAK																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5320.00	94.17	-----	-----	82.69	33.05	11.54	33.11	0.00	341	97	PEAK																																																																				
Avg	<p>Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5407.92</td> <td>45.66</td> <td>54.00</td> <td>-8.34</td> <td>33.08</td> <td>33.00</td> <td>11.92</td> <td>33.14</td> <td>0.00</td> <td>341</td> <td>97</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5407.92	45.66	54.00	-8.34	33.08	33.00	11.92	33.14	0.00	341	97	AVERAGE	<p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>87.04</td> <td>-----</td> <td>-----</td> <td>75.56</td> <td>33.05</td> <td>11.54</td> <td>33.11</td> <td>0.00</td> <td>341</td> <td>97</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	87.04	-----	-----	75.56	33.05	11.54	33.11	0.00	341	97	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5407.92	45.66	54.00	-8.34	33.08	33.00	11.92	33.14	0.00	341	97	AVERAGE																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5320.00	87.04	-----	-----	75.56	33.05	11.54	33.11	0.00	341	97	AVERAGE																																																																				



Mode	94																																																																																																																																																													
	Harmonic																																																																																																																																																													
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_106/54 RU_5320MHz																																																																																																																																																													
ANT	2																																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																																												
Peak Avg	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7093.00</td> <td>52.32</td> <td>68.20</td> <td>-15.88</td> <td>66.76</td> <td>36.56</td> <td>13.94</td> <td>65.85</td> <td>0.91</td> <td>329</td> <td>250</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>47.71</td> <td>74.00</td> <td>-26.29</td> <td>58.35</td> <td>39.18</td> <td>17.23</td> <td>67.31</td> <td>0.26</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15960.00</td> <td>48.86</td> <td>74.00</td> <td>-25.14</td> <td>55.98</td> <td>37.76</td> <td>22.26</td> <td>67.50</td> <td>0.36</td> <td>133</td> <td>68</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>15960.00</td> <td>39.01</td> <td>54.00</td> <td>-14.99</td> <td>46.13</td> <td>37.76</td> <td>22.26</td> <td>67.50</td> <td>0.36</td> <td>133</td> <td>68</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7093.00	52.32	68.20	-15.88	66.76	36.56	13.94	65.85	0.91	329	250	Peak	2	10640.00	47.71	74.00	-26.29	58.35	39.18	17.23	67.31	0.26	--	--	PEAK	3	15960.00	48.86	74.00	-25.14	55.98	37.76	22.26	67.50	0.36	133	68	PEAK	4	15960.00	39.01	54.00	-14.99	46.13	37.76	22.26	67.50	0.36	133	68	Average	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7093.00</td> <td>50.72</td> <td>68.20</td> <td>-17.48</td> <td>65.16</td> <td>36.56</td> <td>13.94</td> <td>65.85</td> <td>0.91</td> <td>100</td> <td>199</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>47.29</td> <td>74.00</td> <td>-26.71</td> <td>57.93</td> <td>39.18</td> <td>17.23</td> <td>67.31</td> <td>0.26</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15960.00</td> <td>48.09</td> <td>74.00</td> <td>-25.91</td> <td>55.21</td> <td>37.76</td> <td>22.26</td> <td>67.50</td> <td>0.36</td> <td>214</td> <td>126</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>15960.00</td> <td>38.38</td> <td>54.00</td> <td>-15.62</td> <td>45.50</td> <td>37.76</td> <td>22.26</td> <td>67.50</td> <td>0.36</td> <td>214</td> <td>126</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7093.00	50.72	68.20	-17.48	65.16	36.56	13.94	65.85	0.91	100	199	Peak	2	10640.00	47.29	74.00	-26.71	57.93	39.18	17.23	67.31	0.26	--	--	PEAK	3	15960.00	48.09	74.00	-25.91	55.21	37.76	22.26	67.50	0.36	214	126	PEAK	4	15960.00	38.38	54.00	-15.62	45.50	37.76	22.26	67.50	0.36	214	126	Average
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																			
1	7093.00	52.32	68.20	-15.88	66.76	36.56	13.94	65.85	0.91	329	250	Peak																																																																																																																																																		
2	10640.00	47.71	74.00	-26.29	58.35	39.18	17.23	67.31	0.26	--	--	PEAK																																																																																																																																																		
3	15960.00	48.86	74.00	-25.14	55.98	37.76	22.26	67.50	0.36	133	68	PEAK																																																																																																																																																		
4	15960.00	39.01	54.00	-14.99	46.13	37.76	22.26	67.50	0.36	133	68	Average																																																																																																																																																		
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																			
1	7093.00	50.72	68.20	-17.48	65.16	36.56	13.94	65.85	0.91	100	199	Peak																																																																																																																																																		
2	10640.00	47.29	74.00	-26.71	57.93	39.18	17.23	67.31	0.26	--	--	PEAK																																																																																																																																																		
3	15960.00	48.09	74.00	-25.91	55.21	37.76	22.26	67.50	0.36	214	126	PEAK																																																																																																																																																		
4	15960.00	38.38	54.00	-15.62	45.50	37.76	22.26	67.50	0.36	214	126	Average																																																																																																																																																		



Mode	94	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_106/54 RU_5320MHz	
ANT	2	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	<p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 HORIZONTAL</p>	<p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 VERTICAL</p>
	17.7G ~18G Avg	<p>Site : 03CH12-HY Condition: AVG_54 3m 91280-02114-240711 HORIZONTAL</p>



Mode	95																																																																																	
	Band Edge																																																																																	
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																	
ANT	2																																																																																	
Pol.	Horizontal	Fundamental																																																																																
	Peak	<p>Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5369.35</td> <td>53.37</td> <td>74.00</td> <td>-20.63</td> <td>41.65</td> <td>33.06</td> <td>11.79</td> <td>33.13</td> <td>0.00</td> <td>100</td> <td>119</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5467.00</td> <td>54.35</td> <td>68.20</td> <td>-13.85</td> <td>42.06</td> <td>33.07</td> <td>11.58</td> <td>33.16</td> <td>0.00</td> <td>100</td> <td>119</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5369.35	53.37	74.00	-20.63	41.65	33.06	11.79	33.13	0.00	100	119	PEAK	2	5467.00	54.35	68.20	-13.85	42.06	33.07	11.58	33.16	0.00	100	119	PEAK																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																										
1	5369.35	53.37	74.00	-20.63	41.65	33.06	11.79	33.13	0.00	100	119	PEAK																																																																						
2	5467.00	54.35	68.20	-13.85	42.06	33.07	11.58	33.16	0.00	100	119	PEAK																																																																						
Avg	<p>Site : 03CH12-HY Condition: AVG_BE(UNII)_B3 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5401.30</td> <td>46.08</td> <td>54.00</td> <td>-7.92</td> <td>34.27</td> <td>33.00</td> <td>11.95</td> <td>33.14</td> <td>0.00</td> <td>100</td> <td>119</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5401.30	46.08	54.00	-7.92	34.27	33.00	11.95	33.14	0.00	100	119	AVERAGE	<p>Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>97.10</td> <td>-----</td> <td>-----</td> <td>85.67</td> <td>33.20</td> <td>11.40</td> <td>33.17</td> <td>0.00</td> <td>100</td> <td>119</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5500.00	97.10	-----	-----	85.67	33.20	11.40	33.17	0.00	100	119	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																										
1	5401.30	46.08	54.00	-7.92	34.27	33.00	11.95	33.14	0.00	100	119	AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																										
1	5500.00	97.10	-----	-----	85.67	33.20	11.40	33.17	0.00	100	119	PEAK																																																																						
	<p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>91.61</td> <td>-----</td> <td>-----</td> <td>80.18</td> <td>33.20</td> <td>11.40</td> <td>33.17</td> <td>0.00</td> <td>100</td> <td>119</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5500.00	91.61	-----	-----	80.18	33.20	11.40	33.17	0.00	100	119	AVERAGE	<p>Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>91.61</td> <td>-----</td> <td>-----</td> <td>80.18</td> <td>33.20</td> <td>11.40</td> <td>33.17</td> <td>0.00</td> <td>100</td> <td>119</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5500.00	91.61	-----	-----	80.18	33.20	11.40	33.17	0.00	100	119	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																										
1	5500.00	91.61	-----	-----	80.18	33.20	11.40	33.17	0.00	100	119	AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																										
1	5500.00	91.61	-----	-----	80.18	33.20	11.40	33.17	0.00	100	119	AVERAGE																																																																						