Mode	104	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_26/4 RU_5580MHz	
ANT	2	
Pol.	Vertical	Fundamental
Peak	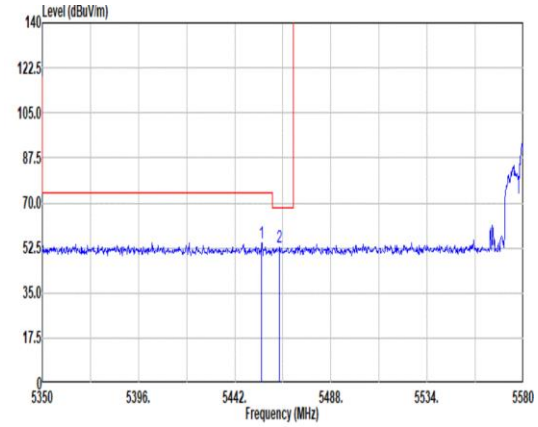 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5454.88 54.40 74.00 -19.60 42.88 33.02 11.65 33.15 0.00 200 85 PEAK 2 5463.39 52.64 68.20 -15.56 41.14 33.05 11.61 33.16 0.00 200 85 PEAK	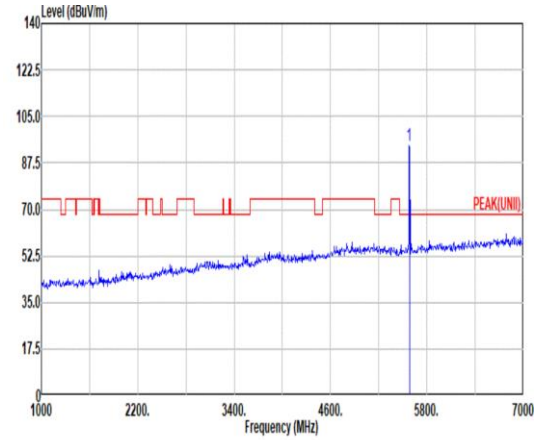 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5580.00 93.83 ------ ------ 82.70 33.10 11.28 33.25 0.00 200 85 PEAK
Avg	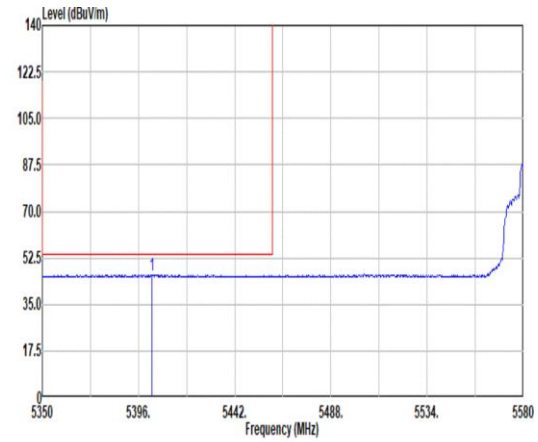 Site : 03CH12-HY Condition: AVG_BE(UNII)_B3 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto 1 5402.44 46.02 54.00 -7.98 34.21 33.00 11.95 33.14 0.00 200 85 AVERAGE	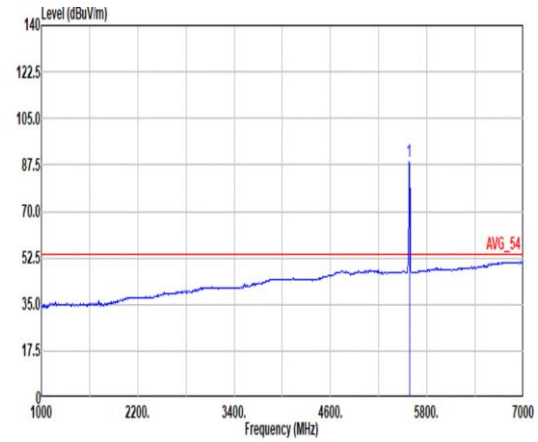 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto 1 5580.00 88.59 ------ ------ 77.46 33.10 11.28 33.25 0.00 200 85 AVERAGE

Mode	104	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_26/4 RU_5580MHz	
ANT	2	
Pol.	Vertical	Fundamental
Peak	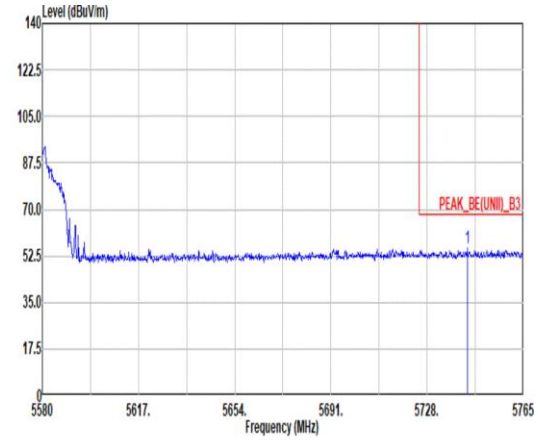 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5743.36 55.26 68.20 -12.94 43.72 33.77 11.18 33.41 0.00 200 85 PEAK	Blank

Mode	104	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_26/4 RU_5580MHz	
ANT	2	
Pol.	Horizontal	Vertical
Peak Avg	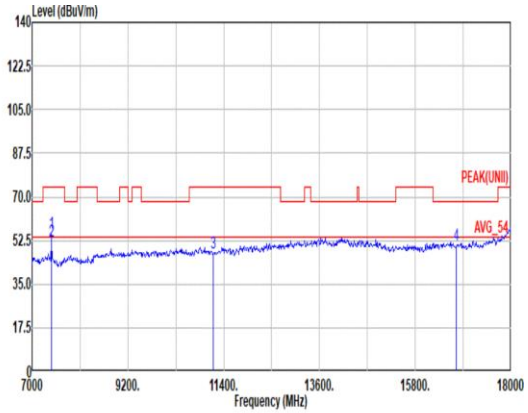 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 7440.00 55.35 74.00 -18.65 69.56 36.68 14.49 66.14 0.76 389 300 Peak 2 7440.00 52.34 54.00 -1.66 66.55 36.68 14.49 66.14 0.76 389 300 Average 3 11160.00 47.63 74.00 -26.37 57.59 38.90 17.71 66.85 0.28 -- -- PEAK 4 16740.00 50.73 68.20 -17.47 56.31 38.12 22.63 66.79 0.46 -- -- PEAK	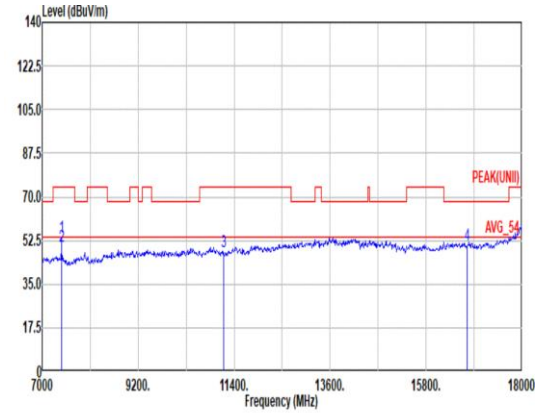 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 7440.00 53.82 74.00 -20.18 68.03 36.68 14.49 66.14 0.76 100 266 Peak 2 7440.00 50.30 54.00 -3.70 64.51 36.68 14.49 66.14 0.76 100 266 Average 3 11160.00 47.93 74.00 -26.07 57.89 38.90 17.71 66.85 0.28 -- -- PEAK 4 16740.00 50.70 68.20 -17.50 56.28 38.12 22.63 66.79 0.46 -- -- PEAK

Mode	104	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_26/4 RU_5580MHz	
ANT	2	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	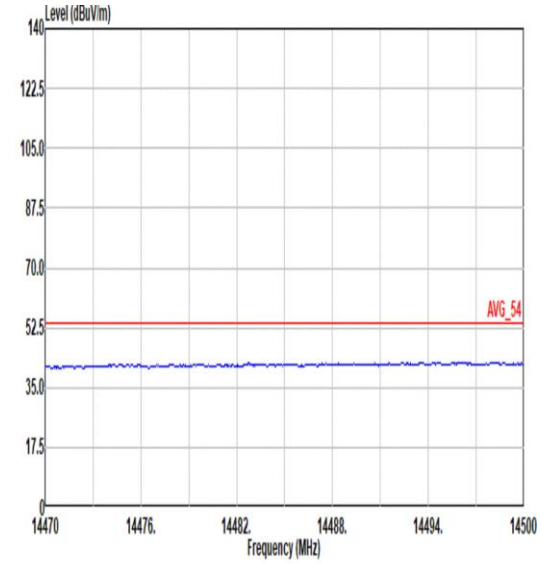 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL	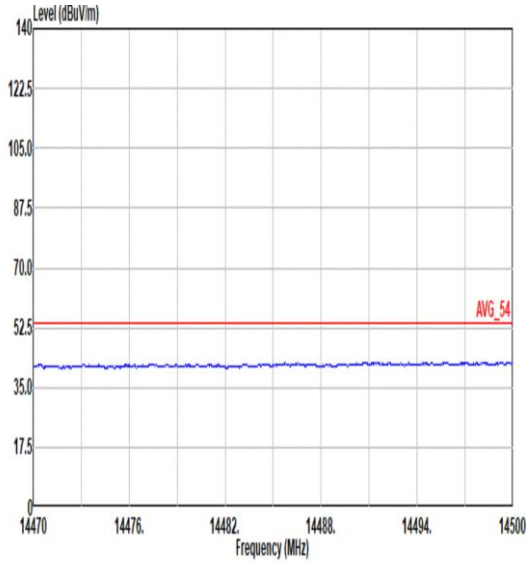 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL
17.7G ~18G Avg	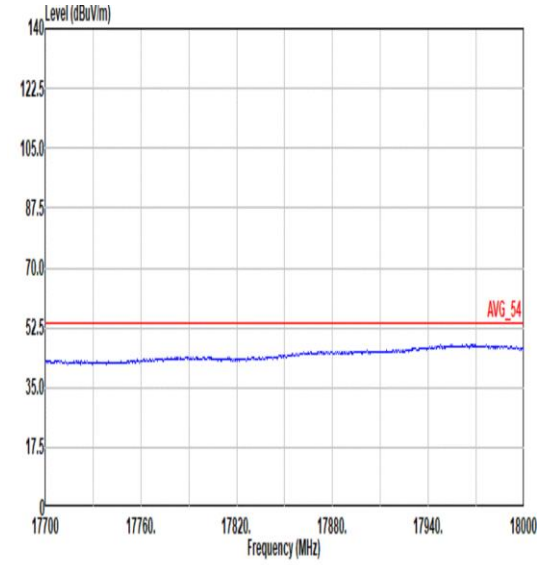 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL	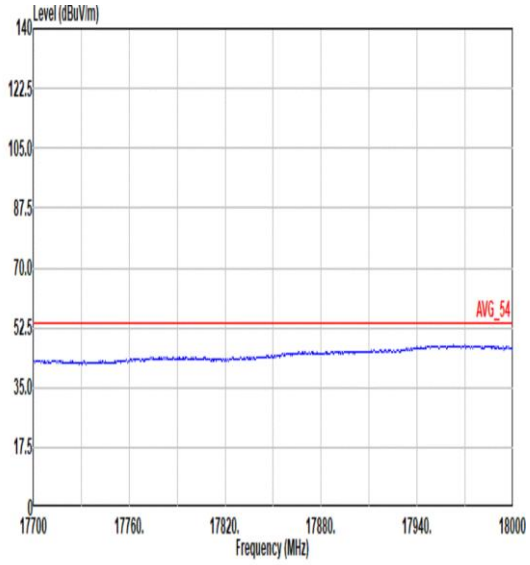 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL

Mode	105	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_52/38 RU_5580MHz	
ANT	2	
Pol.	Horizontal	Fundamental
Peak	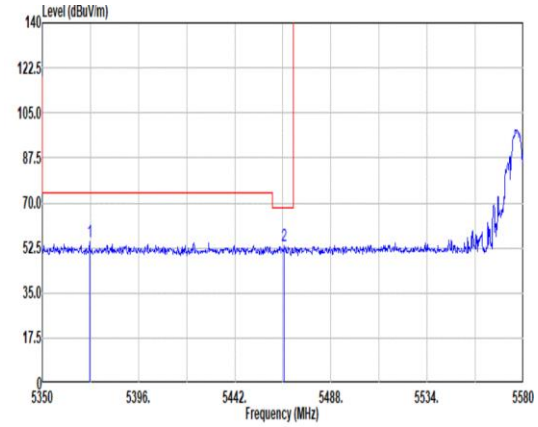 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5372.54 54.70 74.00 -19.30 42.98 33.05 11.80 33.13 0.00 100 119 PEAK 2 5465.69 53.23 68.20 -14.97 41.74 33.06 11.59 33.16 0.00 100 119 PEAK	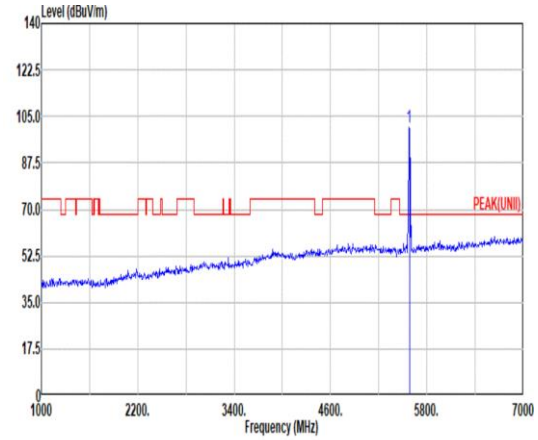 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5580.00 101.07 ------ ------ 89.94 33.10 11.28 33.25 0.00 100 119 PEAK
Avg	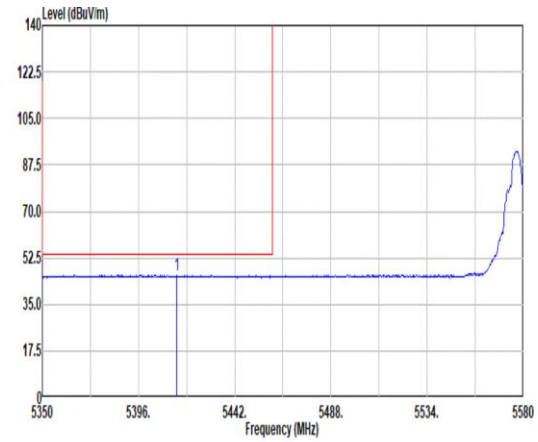 Site : 03CH12-HY Condition: AVG_BE(UNII)_B3 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5414.40 45.97 54.00 -8.03 34.23 33.00 11.88 33.14 0.00 100 119 AVERAGE	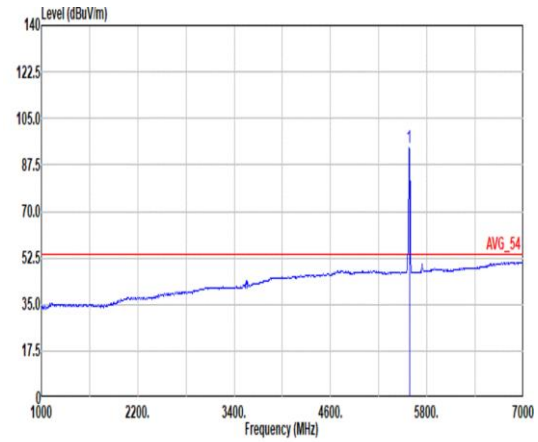 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5580.00 93.92 ------ ------ 82.79 33.10 11.28 33.25 0.00 100 119 AVERAGE

Mode	105	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_52/38 RU_5580MHz	
ANT	2	
Pol.	Horizontal	Fundamental
Peak	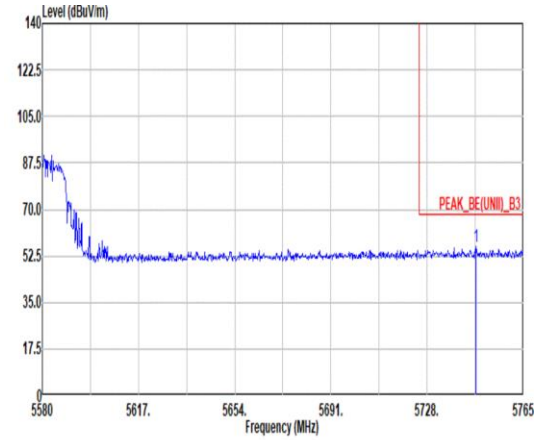 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5746.69 55.99 68.20 -12.21 44.44 33.79 11.18 33.42 0.00 100 119 PEAK	Blank

Mode	105	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_52/38 RU_5580MHz	
ANT	2	
Pol.	Vertical	Fundamental
Peak	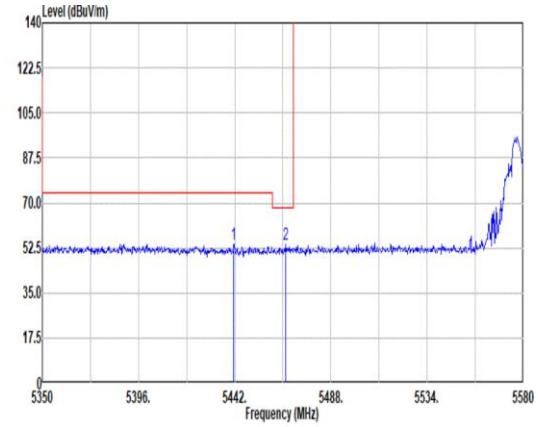 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5441.54 54.00 74.00 -20.00 42.42 33.00 11.73 33.15 0.00 200 93 PEAK 2 5466.38 53.65 68.20 -14.55 42.15 33.07 11.59 33.16 0.00 200 93 PEAK	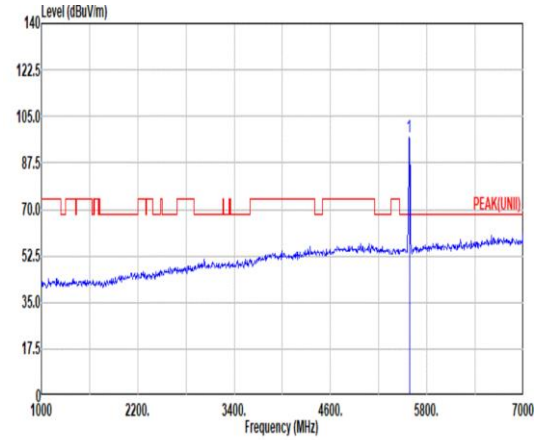 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5580.00 97.31 ------ ------ 86.18 33.10 11.28 33.25 0.00 200 93 PEAK
Avg	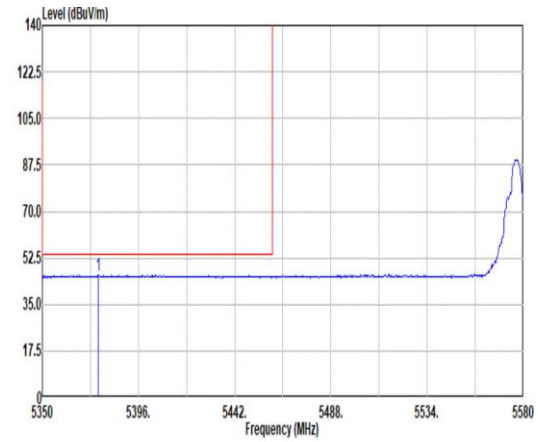 Site : 03CH12-HY Condition: AVG_BE(UNII)_B3 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5376.91 46.08 54.00 -7.92 34.33 33.05 11.83 33.13 0.00 200 93 AVERAGE	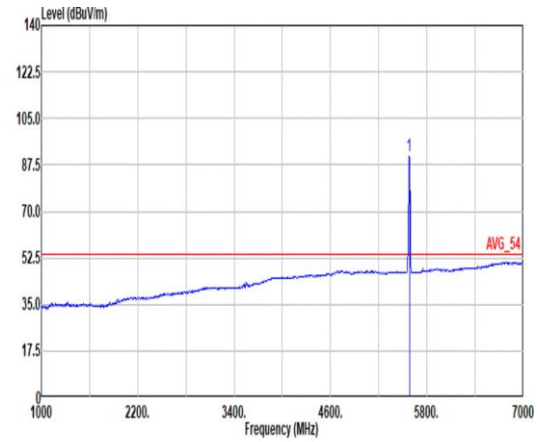 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5580.00 90.91 ------ ------ 79.78 33.10 11.28 33.25 0.00 200 93 AVERAGE

Mode	105	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_52/38 RU_5580MHz	
ANT	2	
Pol.	Vertical	Fundamental
Peak	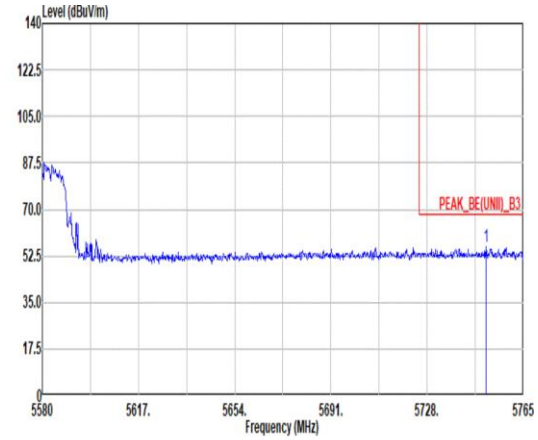 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5750.76 56.00 68.20 -12.20 44.44 33.80 11.18 33.42 0.00 200 93 PEAK	Blank

Mode	105	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_52/38 RU_5580MHz	
ANT	2	
Pol.	Horizontal	Vertical
Peak Avg	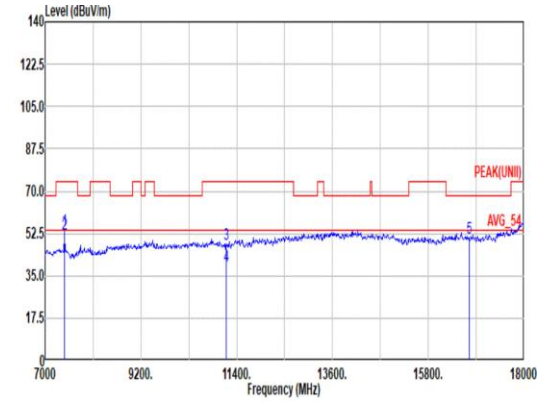 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7440.00 53.63 74.00 -20.37 67.84 36.68 14.49 66.14 0.76 378 310 Peak 2 7440.00 52.06 54.00 -1.94 66.27 36.68 14.49 66.14 0.76 378 310 Average 3 11160.00 48.24 74.00 -25.76 58.20 38.90 17.71 66.85 0.28 381 302 PEAK 4 11160.00 39.17 54.00 -14.83 49.13 38.90 17.71 66.85 0.28 381 302 Average 5 16740.00 50.76 68.20 -17.44 56.34 38.12 22.63 66.79 0.46 -- -- PEAK	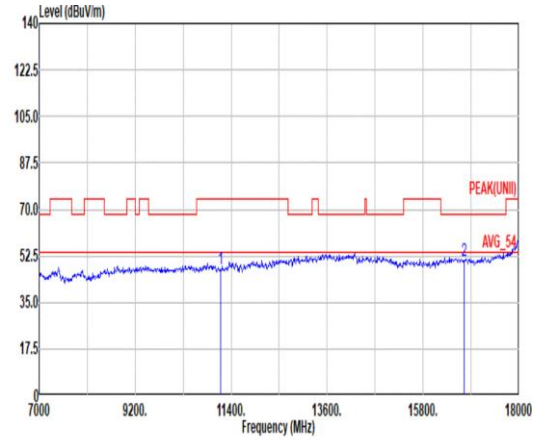 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11160.00 47.78 74.00 -26.22 57.74 38.90 17.71 66.85 0.28 -- -- PEAK 2 16740.00 50.92 68.20 -17.28 56.50 38.12 22.63 66.79 0.46 -- -- PEAK

Mode	105	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_52/38 RU_5580MHz	
ANT	2	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	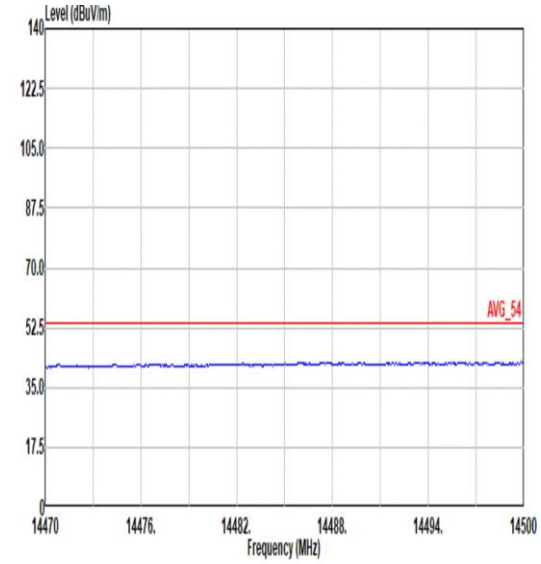 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL	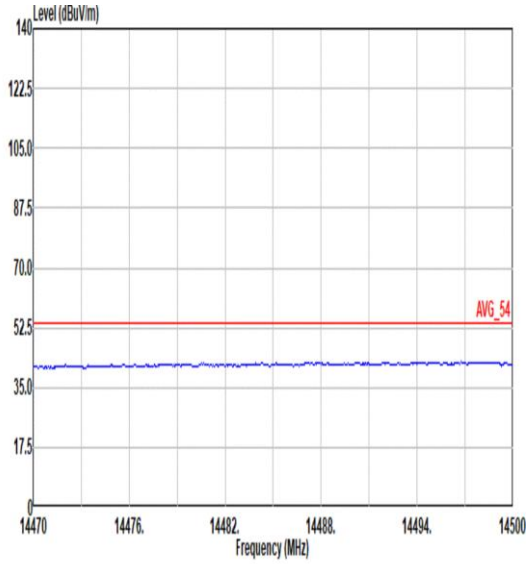 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL
17.7G ~18G Avg	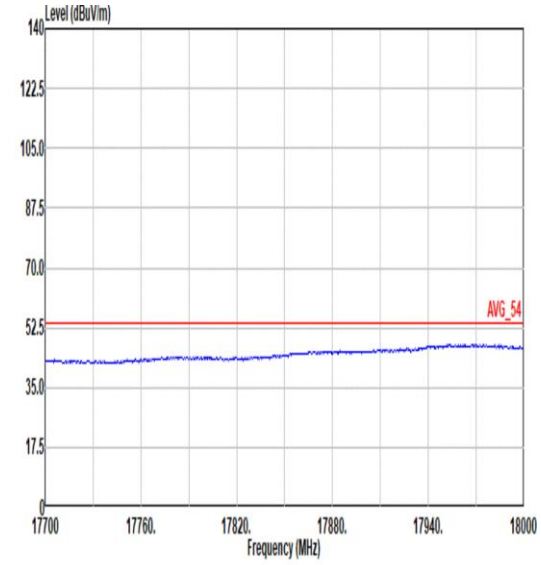 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL	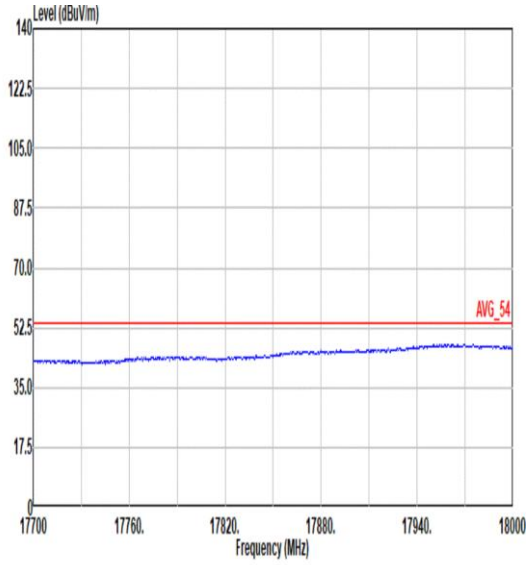 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL

Mode	106	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_106/53 RU_5580MHz	
ANT	2	
Pol.	Horizontal	Fundamental
Peak	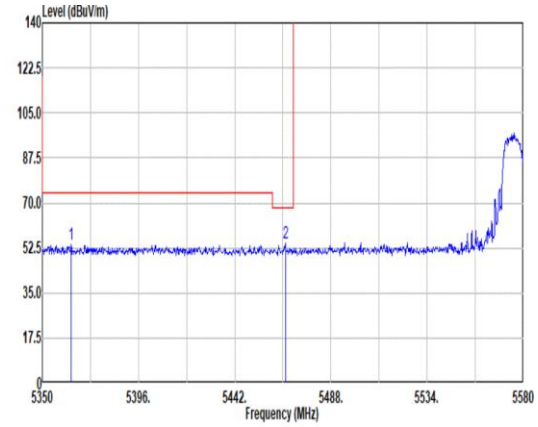 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5363.80 53.74 74.00 -20.26 42.03 33.07 11.76 33.12 0.00 104 121 PEAK 2 5466.15 54.43 68.20 -13.77 42.94 33.06 11.59 33.16 0.00 104 121 PEAK	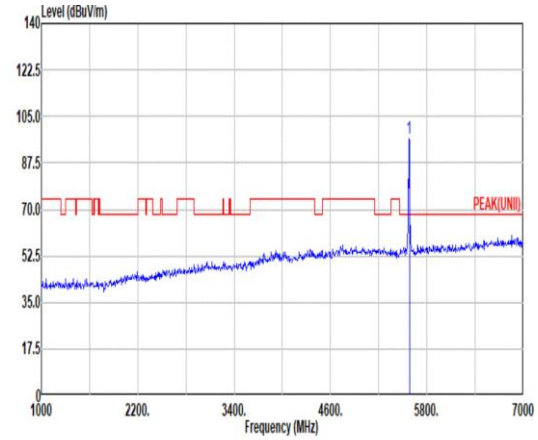 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5580.00 96.92 ------ ------ 85.78 33.10 11.28 33.24 0.00 104 121 PEAK
Avg	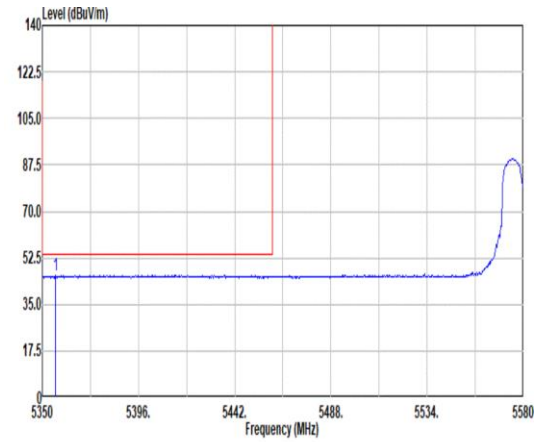 Site : 03CH12-HY Condition: AVG_BE(UNII)_B3 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5356.21 45.92 54.00 -8.08 34.24 33.09 11.71 33.12 0.00 104 121 AVERAGE	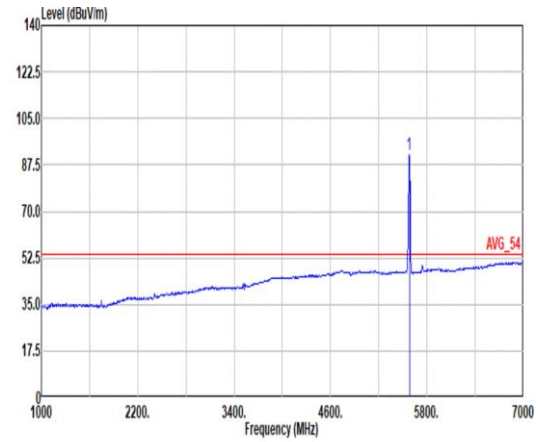 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5580.00 91.19 ------ ------ 80.05 33.10 11.28 33.24 0.00 104 121 AVERAGE

Mode	106	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_106/53 RU_5580MHz	
ANT	2	
Pol.	Horizontal	Fundamental
Peak	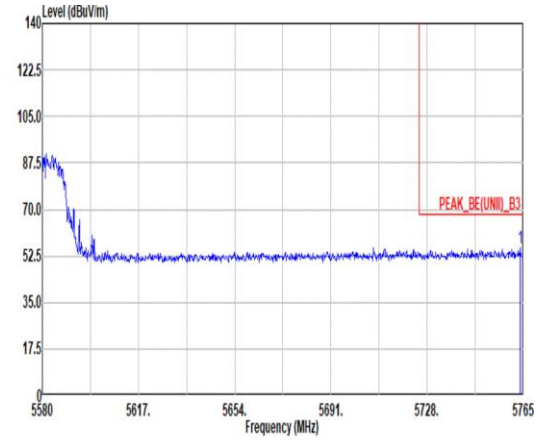 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5763.71 55.54 68.20 -12.66 43.95 33.85 11.17 33.43 0.00 104 121 PEAK	Blank

Mode	106	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_106/53 RU_5580MHz	
ANT	2	
Pol.	Vertical	Fundamental
Peak	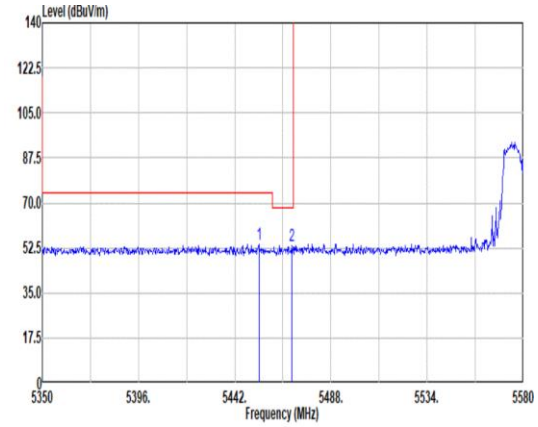 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5453.50 53.73 74.00 -20.27 42.21 33.01 11.66 33.15 0.00 200 95 PEAK 2 5469.37 53.37 68.20 -14.83 41.88 33.08 11.57 33.16 0.00 200 95 PEAK	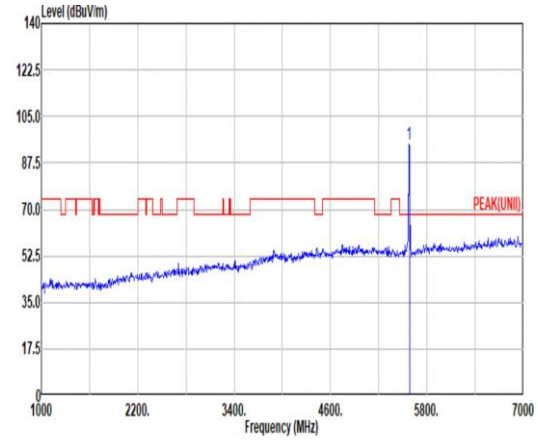 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5580.00 94.48 ------ ------ 83.35 33.10 11.28 33.25 0.00 200 95 PEAK
Avg	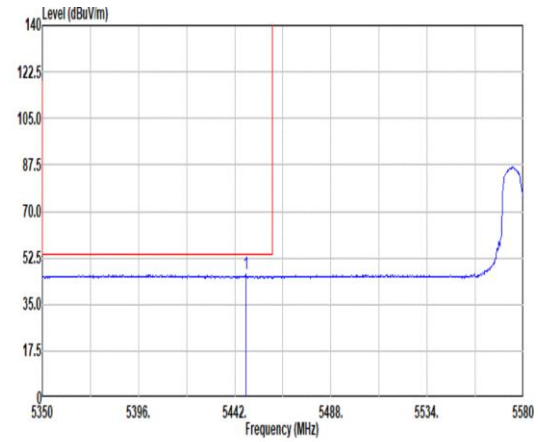 Site : 03CH12-HY Condition: AVG_BE(UNII)_B3 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5447.29 46.23 54.00 -7.77 34.68 33.00 11.70 33.15 0.00 200 95 AVERAGE	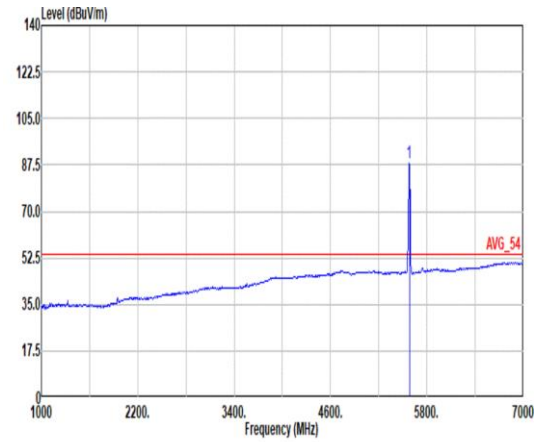 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5580.00 88.15 ------ ------ 77.02 33.10 11.28 33.25 0.00 200 95 AVERAGE

Mode	106	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_106/53 RU_5580MHz	
ANT	2	
Pol.	Vertical	Fundamental
Peak	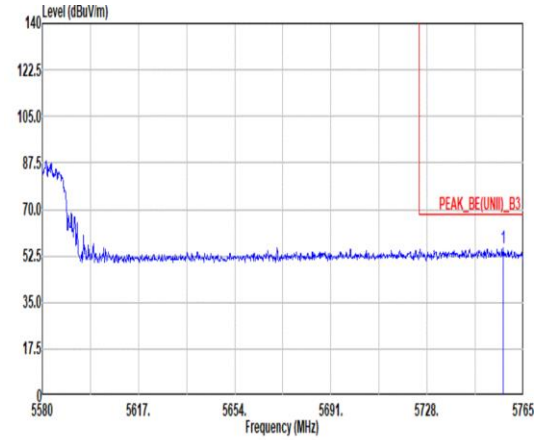 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5757.23 55.25 68.20 -12.95 43.67 33.83 11.18 33.43 0.00 200 95 PEAK	Blank

Mode	106	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_106/53 RU_5580MHz	
ANT	2	
Pol.	Horizontal	Vertical
Peak Avg	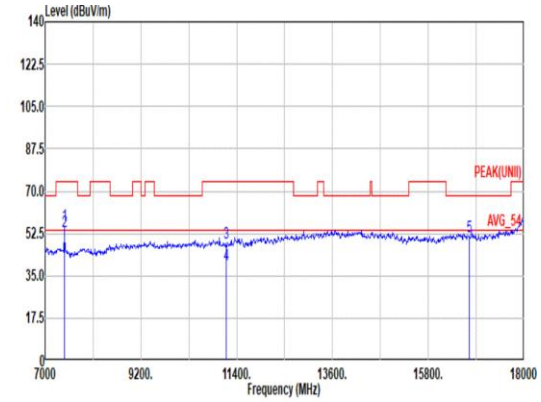 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7440.00 55.84 74.00 -18.16 70.05 36.68 14.49 66.14 0.76 275 317 Peak 2 7440.00 53.29 54.00 -0.71 67.50 36.68 14.49 66.14 0.76 275 317 Average 3 11160.00 48.76 74.00 -25.24 58.72 38.90 17.71 66.85 0.28 284 299 Peak 4 11160.00 39.64 54.00 -14.36 49.60 38.90 17.71 66.85 0.28 284 299 Average 5 16740.00 51.12 68.20 -17.08 56.70 38.12 22.63 66.79 0.46 -- -- PEAK	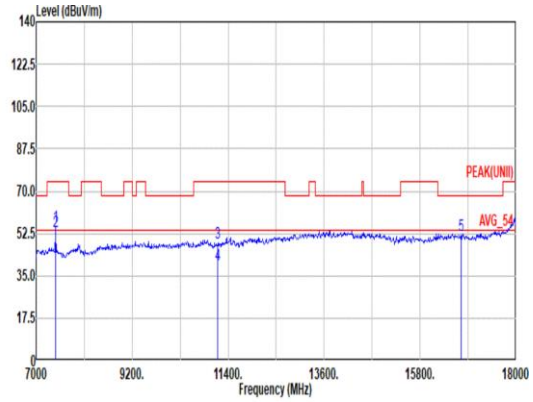 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7440.00 55.57 74.00 -18.43 69.78 36.68 14.49 66.14 0.76 100 285 Peak 2 7440.00 53.42 54.00 -0.58 67.63 36.68 14.49 66.14 0.76 100 285 Average 3 11160.00 48.44 74.00 -25.56 58.40 38.90 17.71 66.85 0.28 100 283 Peak 4 11160.00 39.41 54.00 -14.59 49.37 38.90 17.71 66.85 0.28 100 283 Average 5 16740.00 51.53 68.20 -16.67 57.11 38.12 22.63 66.79 0.46 -- -- PEAK

Mode	106	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_106/53 RU_5580MHz	
ANT	2	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	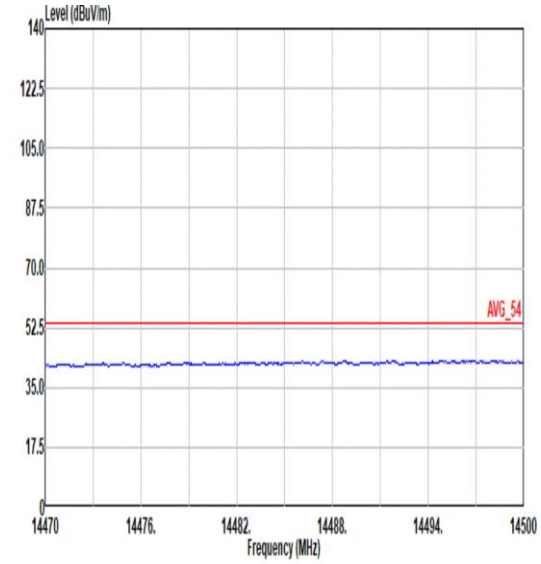 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL	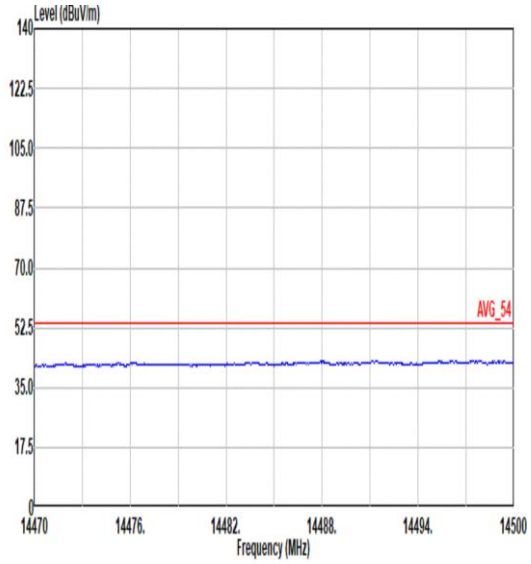 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL
17.7G ~18G Avg	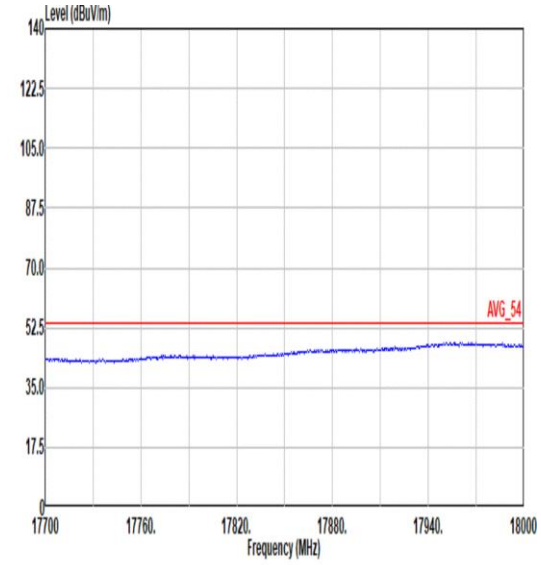 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL	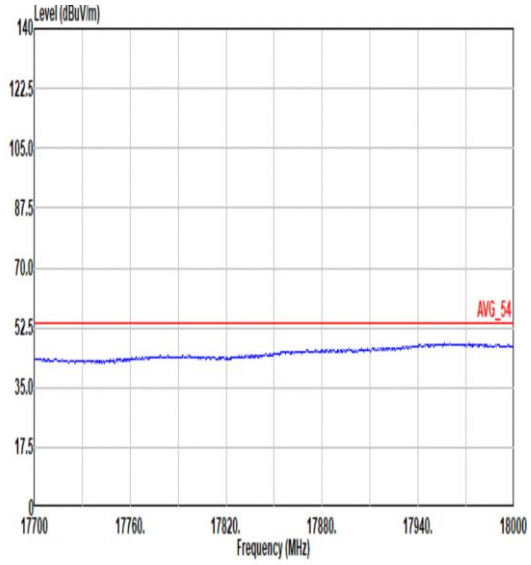 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL

Mode	107	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_26/8 RU_5700MHz	
ANT	2	
Pol.	Horizontal	Fundamental
Peak	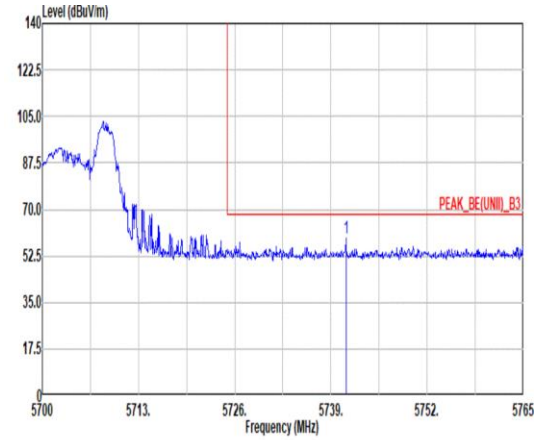 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5741.02 58.98 68.20 -9.22 47.45 33.76 11.18 33.41 0.00 100 140 PEAK	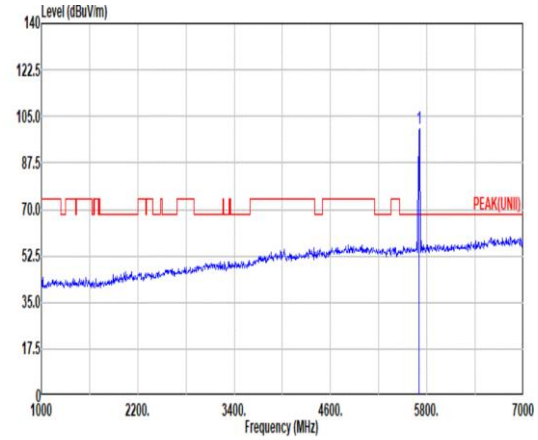 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 100.23 ------ ------ 88.77 33.64 11.20 33.38 0.00 100 140 PEAK
Avg	Blank	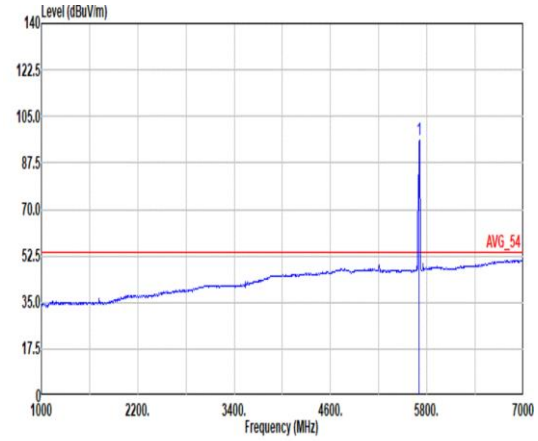 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 96.04 ------ ------ 84.58 33.64 11.20 33.38 0.00 100 140 AVERAGE

Mode	107	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_26/8 RU_5700MHz	
ANT	2	
Pol.	Vertical	Fundamental
Peak	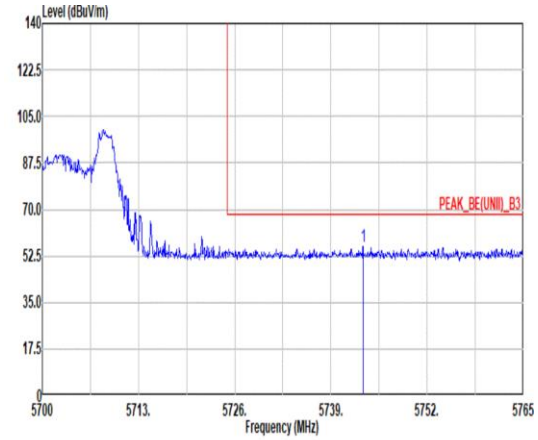 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5743.36 56.07 68.20 -12.13 44.53 33.77 11.18 33.41 0.00 346 92 PEAK	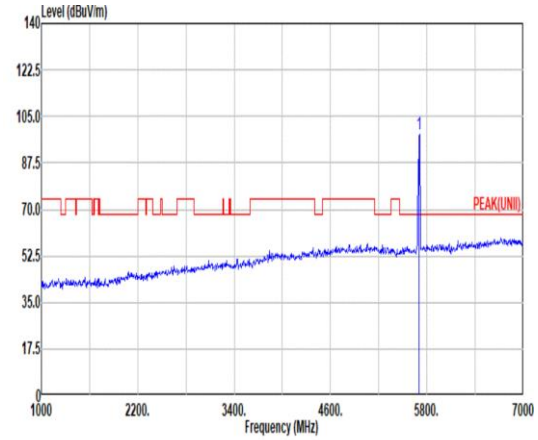 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 98.34 ------ ------ 86.88 33.64 11.20 33.38 0.00 346 92 PEAK
Avg	Blank	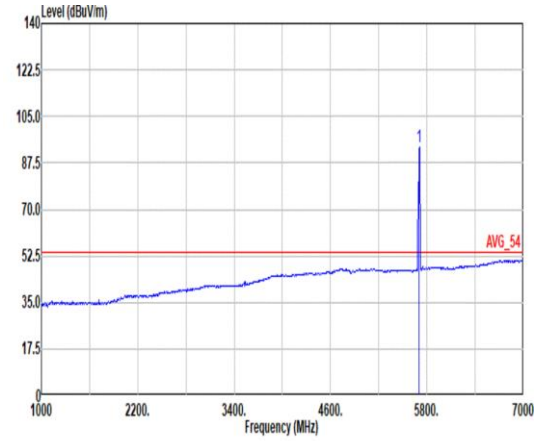 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 93.73 ------ ------ 82.27 33.64 11.20 33.38 0.00 346 92 AVERAGE

Mode	107	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_26/8 RU_5700MHz	
ANT	2	
Pol.	Horizontal	Vertical
Peak Avg	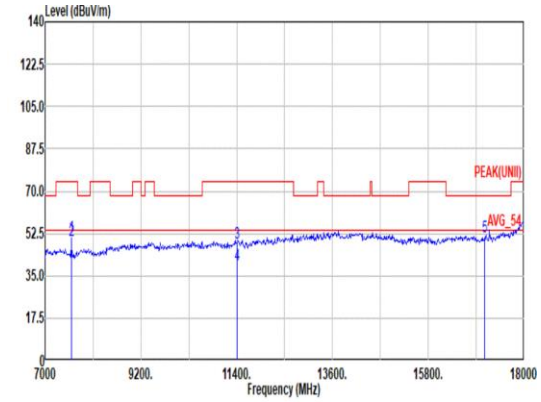 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7600.00 51.38 74.00 -22.62 66.17 36.40 14.51 66.24 0.54 391 309 Peak 2 7600.00 49.92 54.00 -4.08 64.71 36.40 14.51 66.24 0.54 391 309 Average 3 11400.00 48.86 74.00 -25.14 57.80 39.20 18.19 66.62 0.29 392 292 PEAK 4 11400.00 39.83 54.00 -14.17 48.77 39.20 18.19 66.62 0.29 392 292 Average 5 17100.00 50.99 68.20 -17.21 56.60 38.00 22.84 66.96 0.51 -- -- PEAK	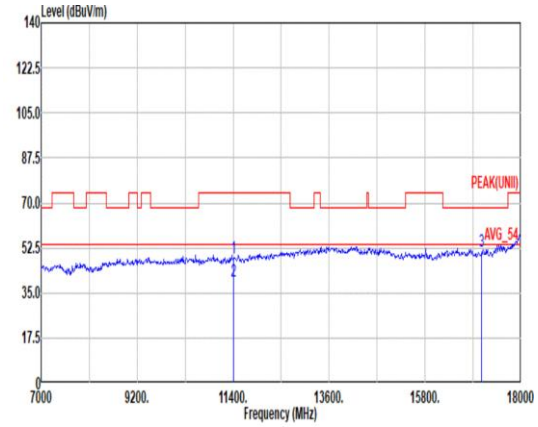 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11400.00 48.48 74.00 -25.52 57.42 39.20 18.19 66.62 0.29 100 288 PEAK 2 11400.00 39.44 54.00 -14.56 48.38 39.20 18.19 66.62 0.29 100 288 Average 3 17100.00 51.16 68.20 -17.04 56.77 38.00 22.84 66.96 0.51 -- -- PEAK

Mode	107	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_26/8 RU_5700MHz	
ANT	2	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	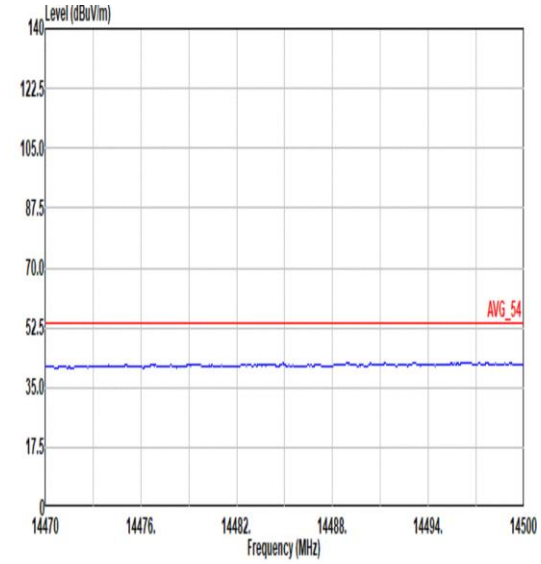 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL	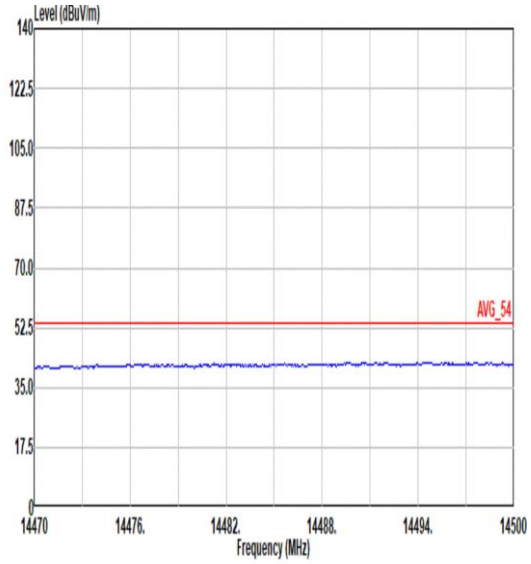 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL
17.7G ~18G Avg	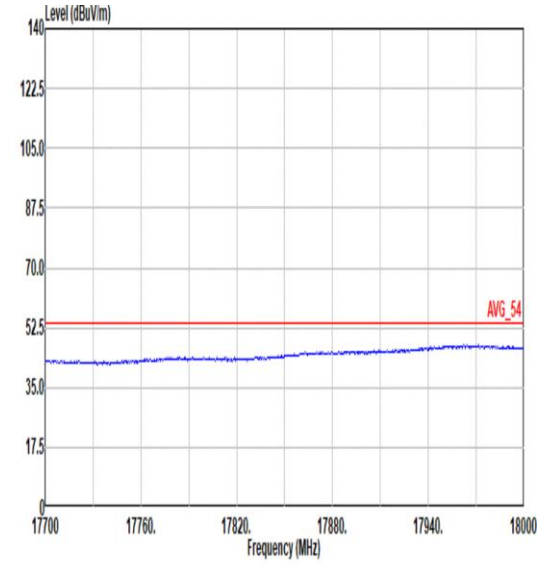 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL	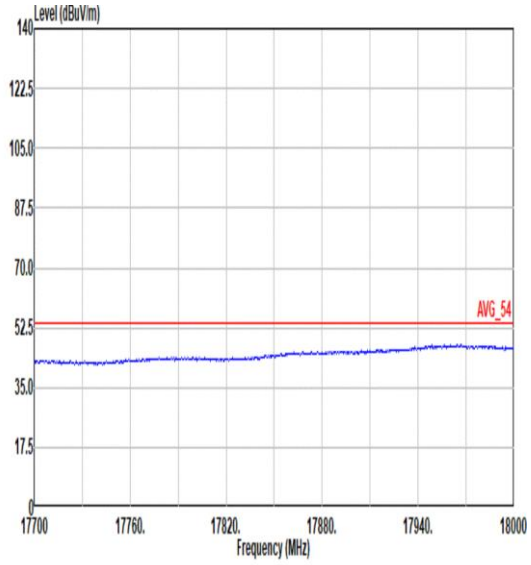 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL

Mode	108	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_52/40 RU_5700MHz	
ANT	2	
Pol.	Horizontal	Fundamental
Peak	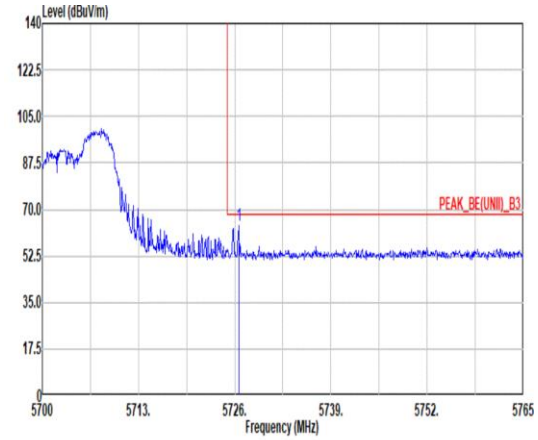 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5726.52 63.91 68.20 -4.29 52.41 33.71 11.19 33.40 0.00 100 119 PEAK	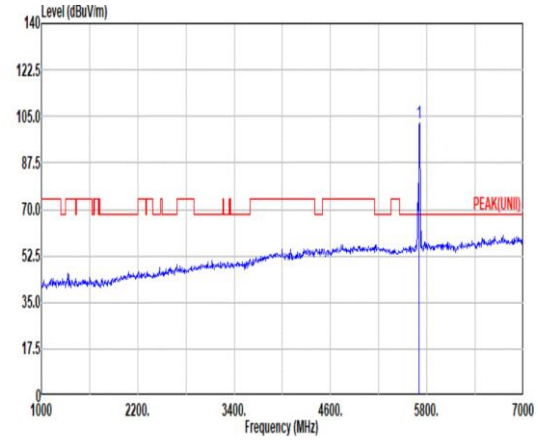 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 102.68 ------ ------ 91.22 33.64 11.20 33.38 0.00 100 119 PEAK
Avg	Blank	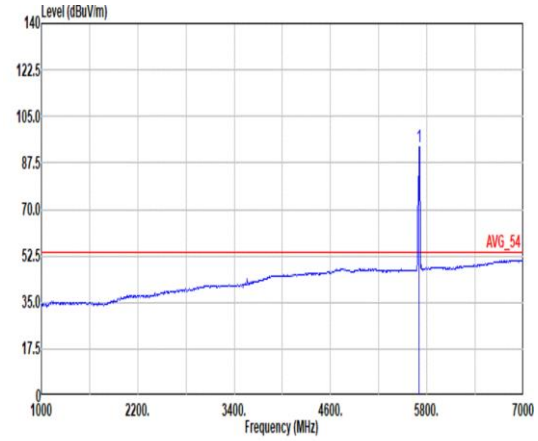 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 93.62 ------ ------ 82.16 33.64 11.20 33.38 0.00 100 119 AVERAGE

Mode	108	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_52/40 RU_5700MHz	
ANT	2	
Pol.	Vertical	Fundamental
Peak	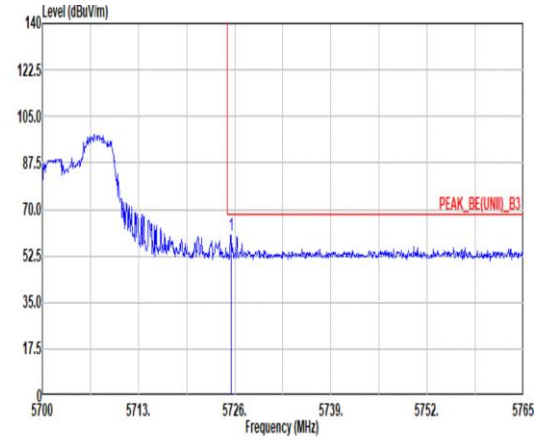 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5725.55 60.16 68.20 -8.04 48.67 33.70 11.19 33.40 0.00 264 100 PEAK	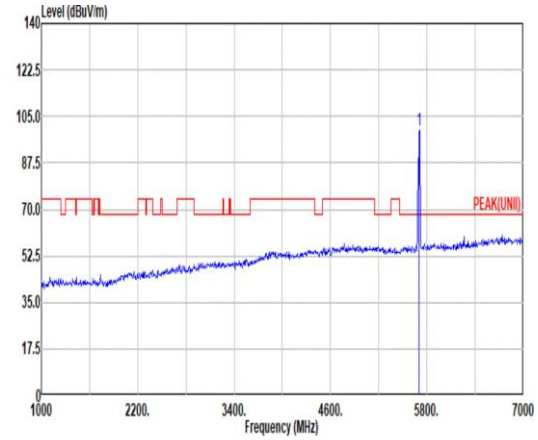 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 100.06 ------ ------ 88.60 33.64 11.20 33.38 0.00 264 100 PEAK
Avg	Blank	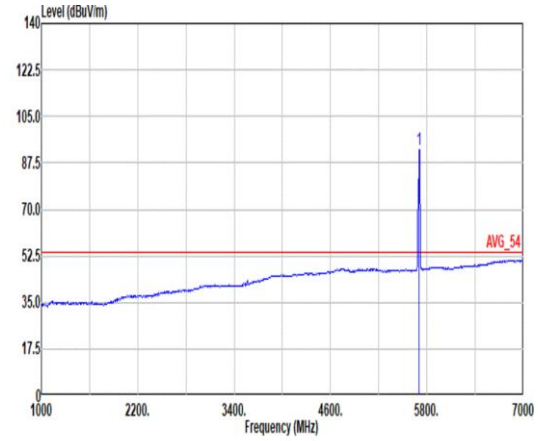 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 92.59 ------ ------ 81.13 33.64 11.20 33.38 0.00 264 100 AVERAGE

Mode	108	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_52/40 RU_5700MHz	
ANT	2	
Pol.	Horizontal	Vertical
Peak Avg	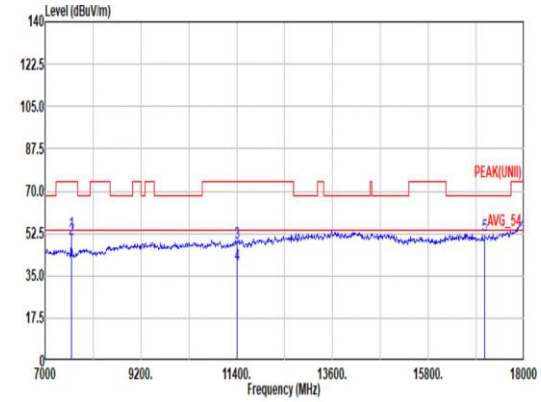 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7600.00 52.87 74.00 -21.13 67.66 36.40 14.51 66.24 0.54 373 311 Peak 2 7600.00 49.98 54.00 -4.02 64.77 36.40 14.51 66.24 0.54 373 311 Average 3 11400.00 48.64 74.00 -25.36 57.58 39.20 18.19 66.62 0.29 380 304 Peak 4 11400.00 39.61 54.00 -14.39 48.55 39.20 18.19 66.62 0.29 380 304 Average 5 17100.00 51.86 68.20 -16.34 57.47 38.00 22.84 66.96 0.51 -- -- PEAK	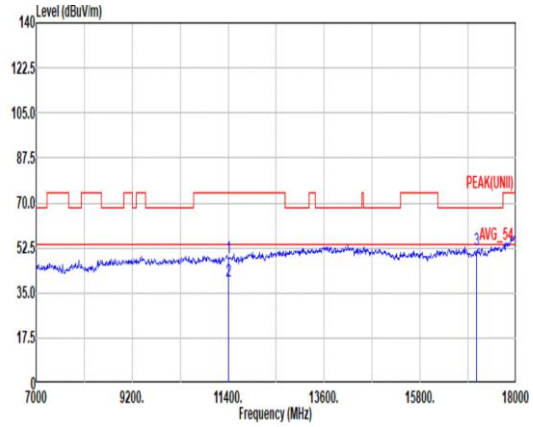 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11400.00 48.64 74.00 -25.36 57.58 39.20 18.19 66.62 0.29 100 280 Peak 2 11400.00 39.64 54.00 -14.36 48.58 39.20 18.19 66.62 0.29 100 280 Average 3 17100.00 51.54 68.20 -16.66 57.15 38.00 22.84 66.96 0.51 -- -- PEAK

Mode	108	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_52/40 RU_5700MHz	
ANT	2	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	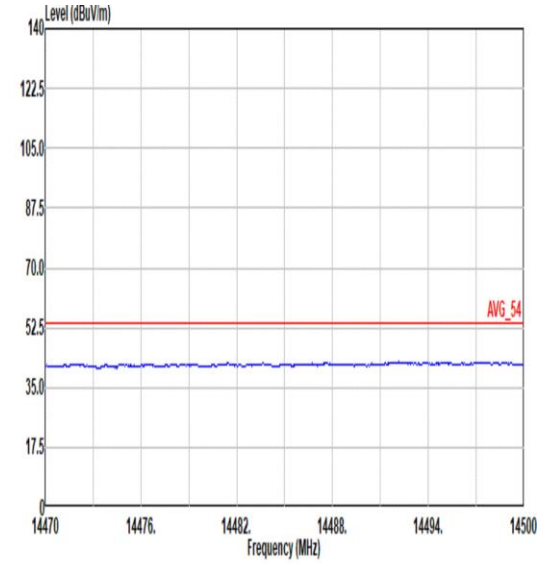 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL	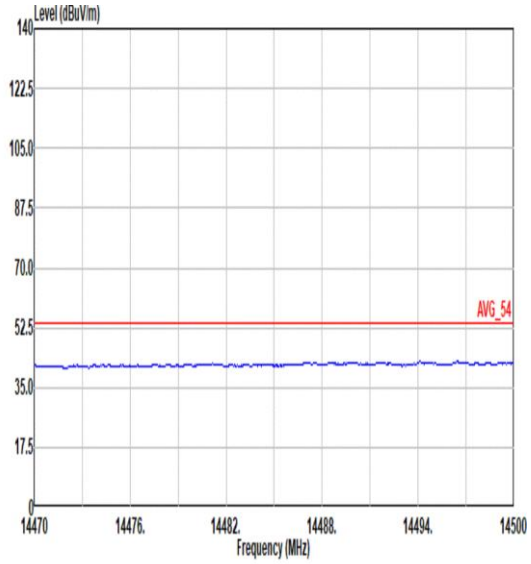 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL
17.7G ~18G Avg	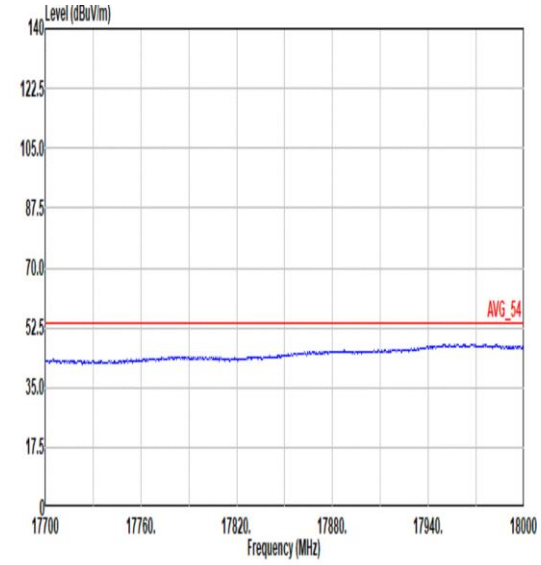 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL	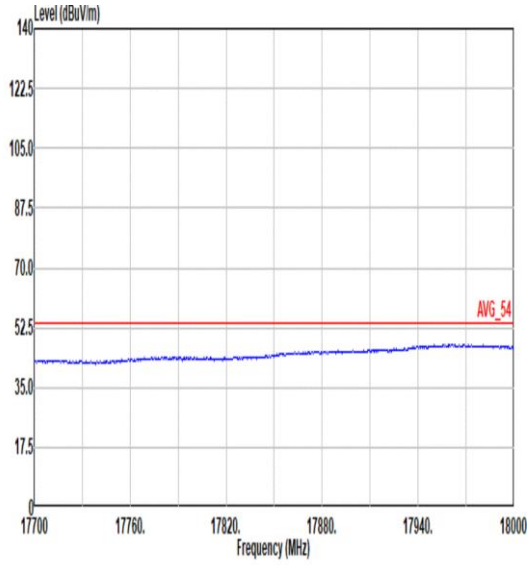 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL

Mode	109	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_106/54 RU_5700MHz	
ANT	2	
Pol.	Horizontal	Fundamental
Peak	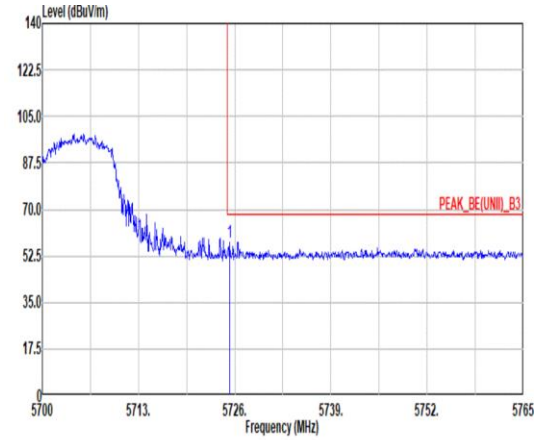 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5725.29 57.73 68.20 -10.47 46.24 33.70 11.19 33.40 0.00 106 121 PEAK	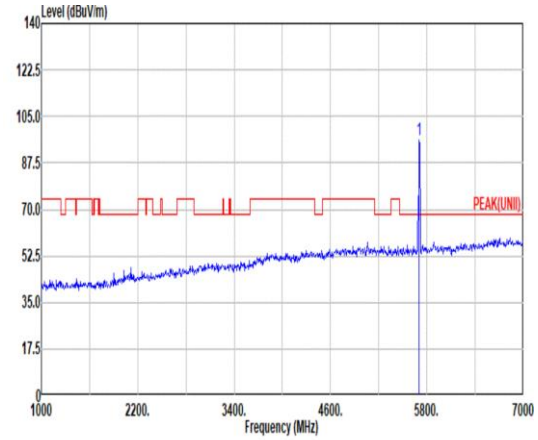 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 96.34 ------ ------ 84.89 33.62 11.20 33.37 0.00 106 121 PEAK
Avg	Blank	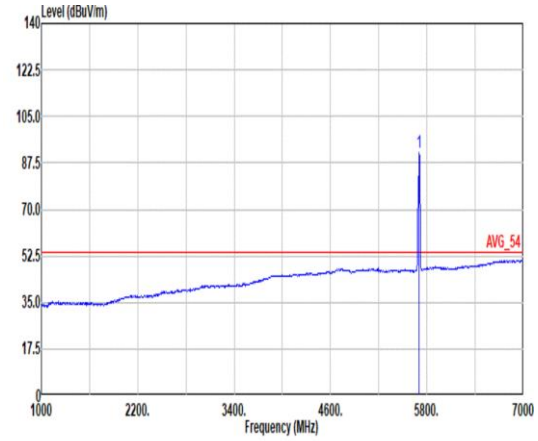 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 91.26 ------ ------ 79.81 33.62 11.20 33.37 0.00 106 121 AVERAGE

Mode	109	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_106/54 RU_5700MHz	
ANT	2	
Pol.	Vertical	Fundamental
Peak	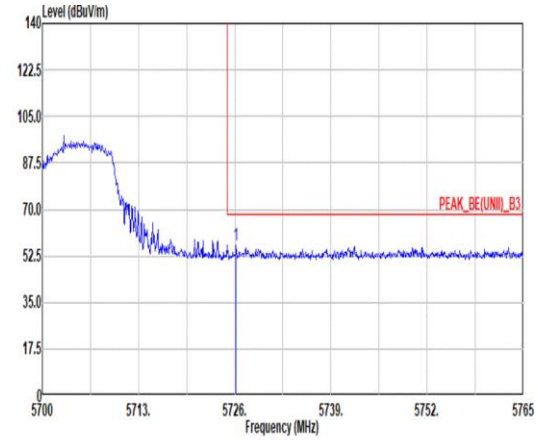 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5726.20 56.37 68.20 -11.83 44.88 33.70 11.19 33.40 0.00 262 96 PEAK	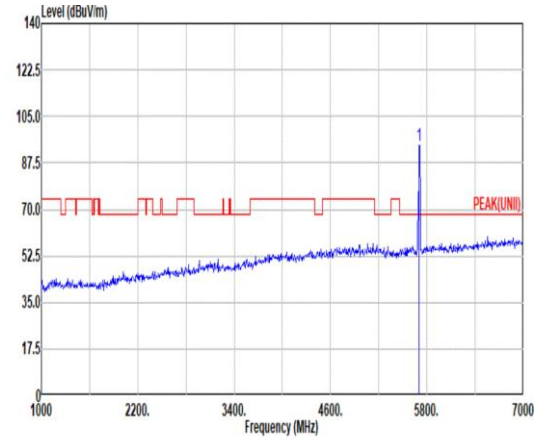 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 94.27 ------ ------ 82.81 33.64 11.20 33.38 0.00 262 96 PEAK
Avg	Blank	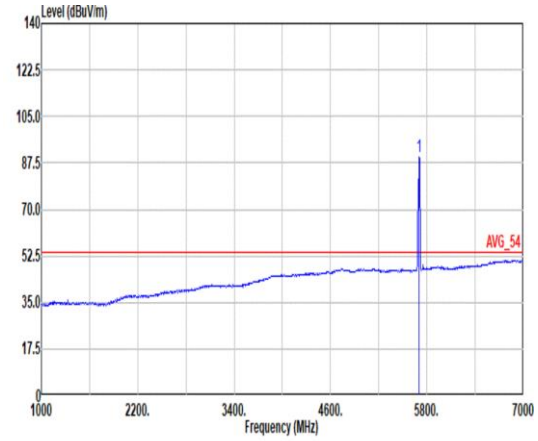 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 89.79 ------ ------ 78.34 33.62 11.20 33.37 0.00 262 96 AVERAGE

Mode	109	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_106/54 RU_5700MHz	
ANT	2	
Pol.	Horizontal	Vertical
Peak Avg	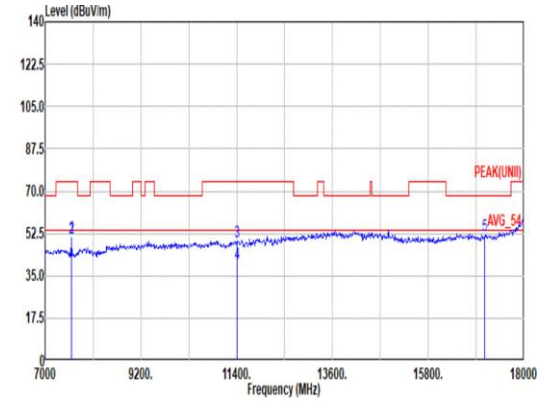 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7600.00 51.50 74.00 -22.50 66.29 36.40 14.51 66.24 0.54 300 301 Peak 2 7600.00 50.50 54.00 -3.50 65.29 36.40 14.51 66.24 0.54 300 301 Average 3 11400.00 49.07 74.00 -24.93 58.01 39.20 18.19 66.62 0.29 300 294 Peak 4 11400.00 39.95 54.00 -14.05 48.89 39.20 18.19 66.62 0.29 300 294 Average 5 17100.00 51.71 68.20 -16.49 57.32 38.00 22.84 66.96 0.51 -- -- PEAK	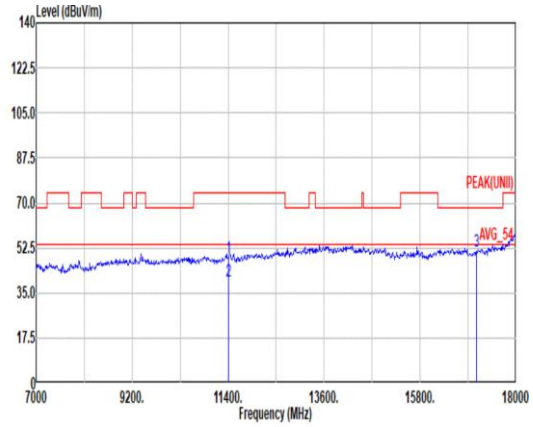 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11400.00 48.80 74.00 -25.20 57.74 39.20 18.19 66.62 0.29 100 281 PEAK 2 11400.00 39.70 54.00 -14.30 48.64 39.20 18.19 66.62 0.29 100 281 Average 3 17100.00 51.12 68.20 -17.08 56.73 38.00 22.84 66.96 0.51 -- -- PEAK

Mode	109	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_106/54 RU_5700MHz	
ANT	2	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	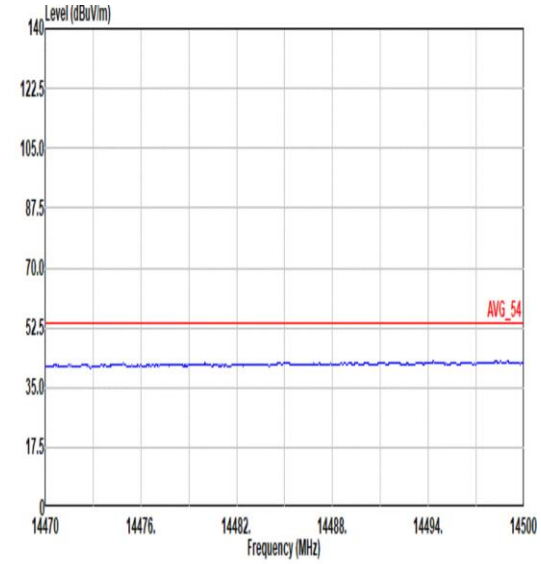 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL	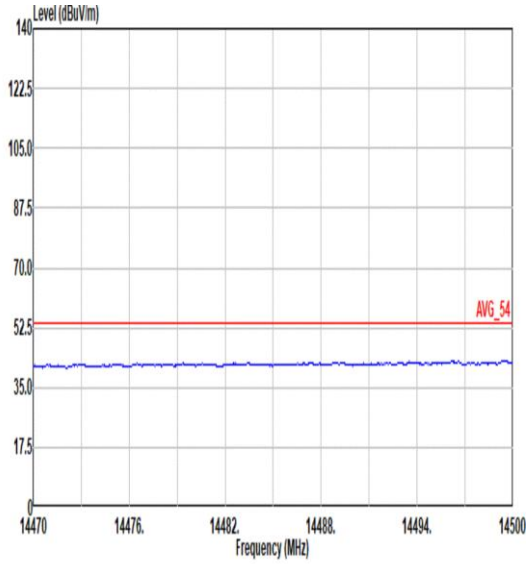 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL
17.7G ~18G Avg	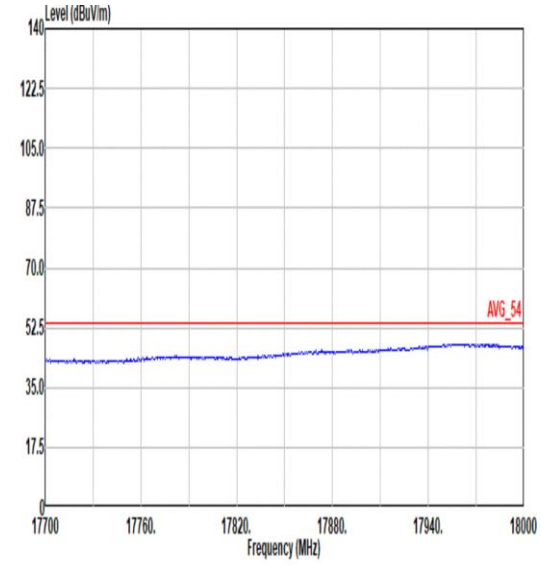 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL	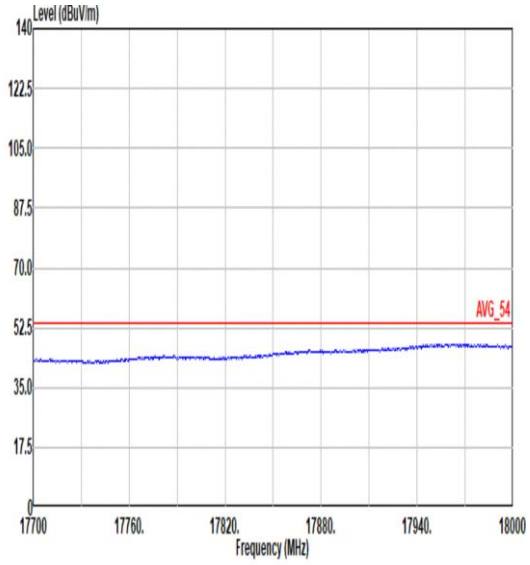 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL

Mode	110	
	SHF	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_106/53 RU_5580MHz	
ANT	2	
Pol.	Horizontal	Vertical
Peak	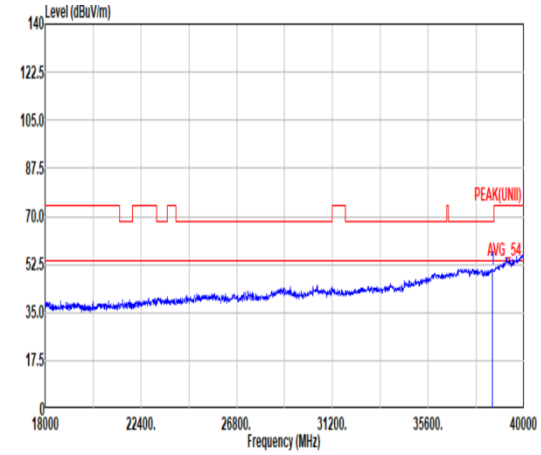 Site : 03CH12-HY Condition: PEAK(UNII) 1m SHF_00993_231124 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 38530.00 50.87 68.20 -17.33 35.72 43.36 33.27 51.94 -9.54 -- -- Peak	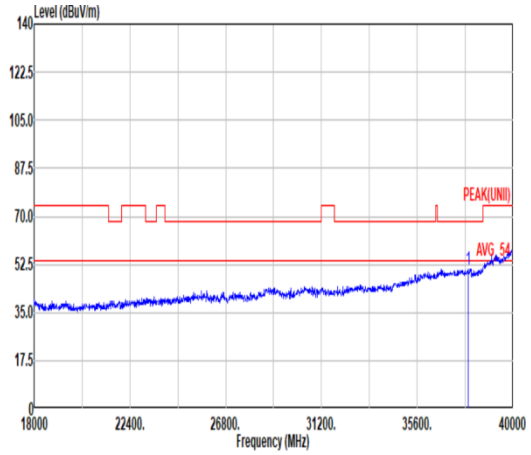 Site : 03CH12-HY Condition: PEAK(UNII) 1m SHF_00993_231124 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 37956.00 50.76 68.20 -17.44 36.59 43.93 32.27 52.49 -9.54 -- -- Peak
Avg	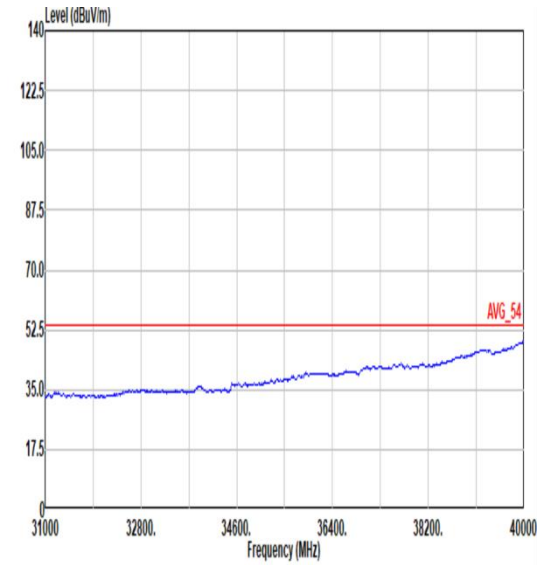 Site : 03CH12-HY Condition: AVG_54 1m SHF_00993_231124 HORIZONTAL	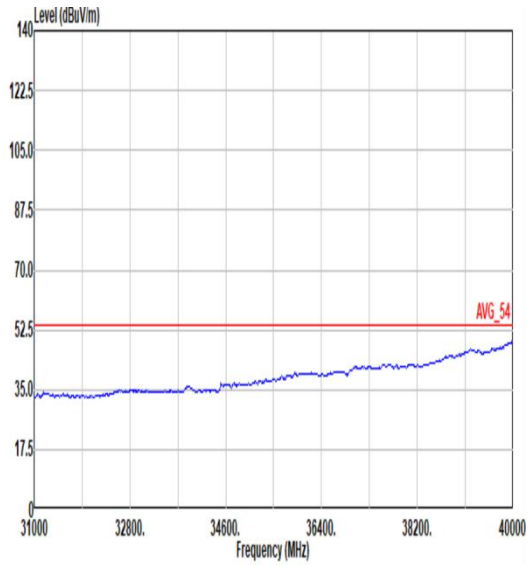 Site : 03CH12-HY Condition: AVG_54 1m SHF_00993_231124 VERTICAL

Mode	111	
	LF	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_106/53 RU_5580MHz	
ANT	2	
Pol.	Horizontal	Vertical
QP/ Peak	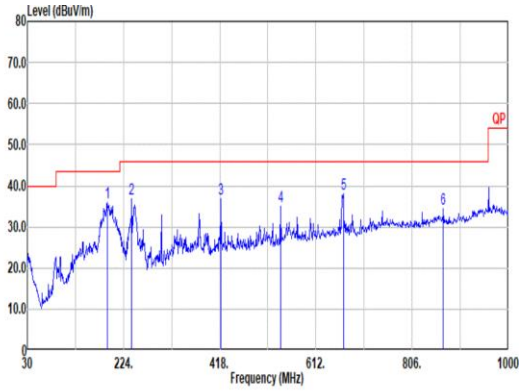 Site : 03CH12-HY Condition: QP 3m Bilog_37059_20231103 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 191.02 35.91 43.50 -7.59 48.29 14.96 2.35 29.79 0.10 -- -- Peak 2 240.49 36.70 46.00 -9.30 46.37 17.35 2.56 29.69 0.11 -- -- Peak 3 420.91 36.97 46.00 -9.03 40.02 22.81 3.37 29.41 0.18 -- -- Peak 4 540.22 34.95 46.00 -11.05 35.50 24.69 3.73 29.19 0.22 -- -- Peak 5 667.29 38.00 46.00 -8.00 36.06 26.55 4.18 29.06 0.27 -- -- Peak 6 869.05 34.45 46.00 -11.55 28.73 29.35 4.64 28.62 0.35 -- -- Peak	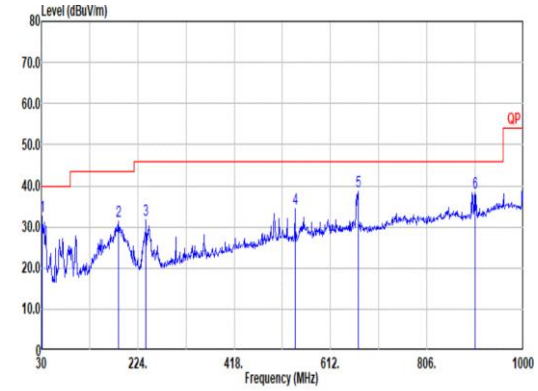 Site : 03CH12-HY Condition: QP 3m Bilog_37059_20231103 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 31.94 32.70 40.00 -7.30 37.34 23.99 1.09 29.77 0.05 -- -- Peak 2 185.20 31.34 43.50 -12.16 43.66 15.07 2.31 29.79 0.09 -- -- Peak 3 240.49 31.64 46.00 -14.36 41.31 17.35 2.56 29.69 0.11 -- -- Peak 4 540.22 34.28 46.00 -11.72 34.83 24.69 3.73 29.19 0.22 -- -- Peak 5 667.29 38.70 46.00 -7.30 36.76 26.55 4.18 29.06 0.27 -- -- Peak 6 903.00 38.44 46.00 -7.56 32.66 29.19 4.74 28.50 0.35 -- -- Peak

Mode	129	
	Band Edge	
	U-NII-1_5.15-5.25_802.11n HT20_CH36_Full RU_5180MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	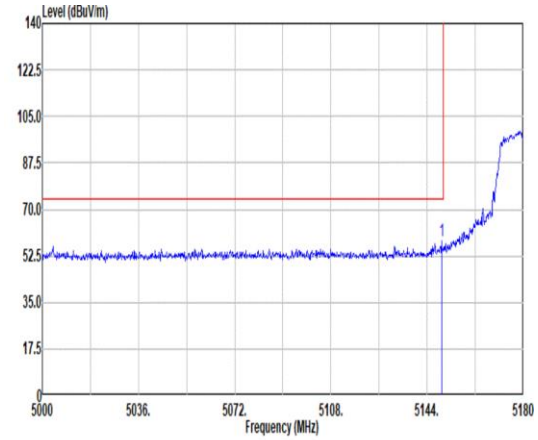 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.40 58.30 74.00 -15.70 47.23 33.40 10.72 33.05 0.00 100 66 PEAK	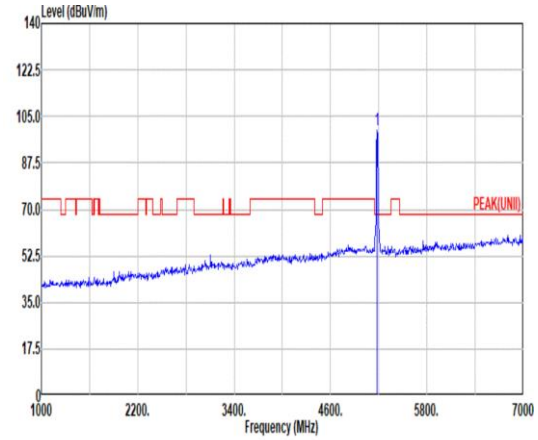 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 99.96 ------ ------ 88.89 33.34 10.79 33.06 0.00 100 66 PEAK
Avg	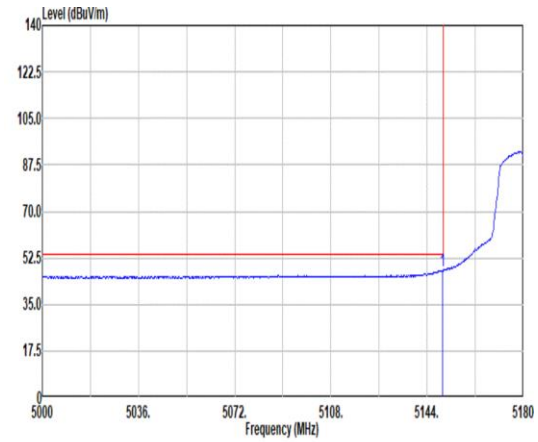 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.76 47.72 54.00 -6.28 36.65 33.40 10.72 33.05 0.00 100 66 AVERAGE	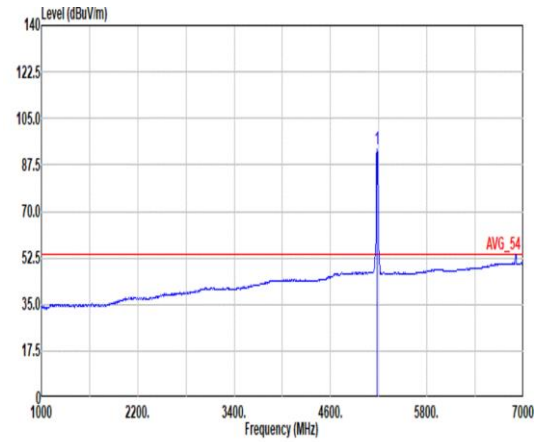 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 93.55 ------ ------ 82.48 33.35 10.78 33.06 0.00 100 66 AVERAGE

Mode	129	
	Band Edge	
	U-NII-1_5.15-5.25_802.11n HT20_CH36_Full RU_5180MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	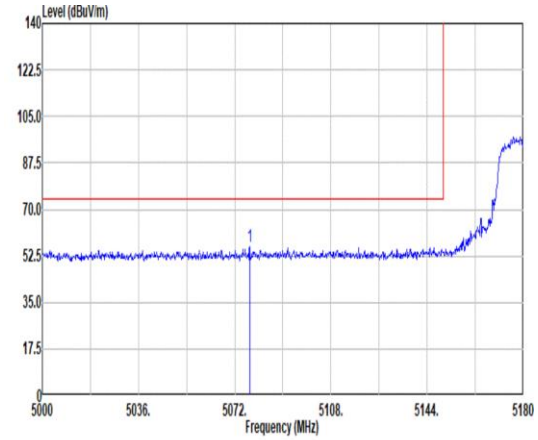 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5077.58 55.85 74.00 -18.15 45.12 33.20 10.56 33.03 0.00 284 86 PEAK	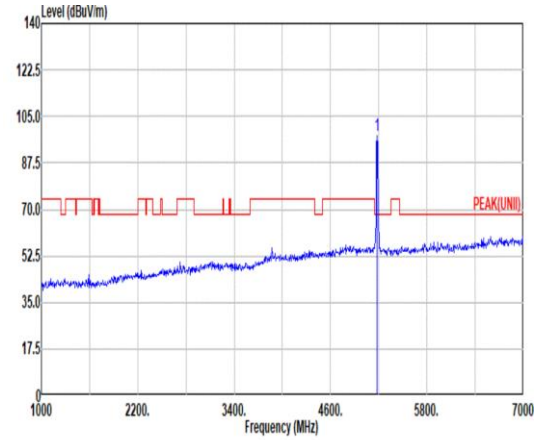 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 97.99 ------ ------ 86.92 33.34 10.79 33.06 0.00 284 86 PEAK
Avg	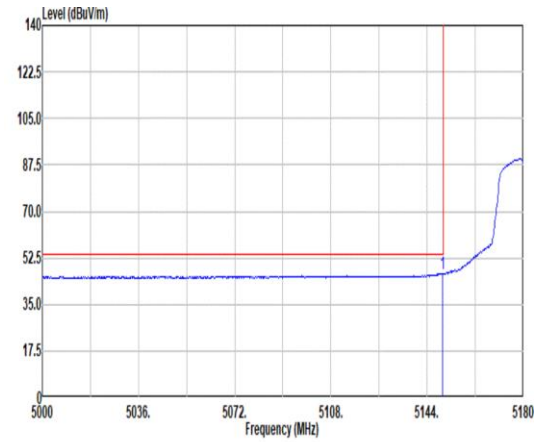 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.76 46.46 54.00 -7.54 35.39 33.40 10.72 33.05 0.00 284 86 AVERAGE	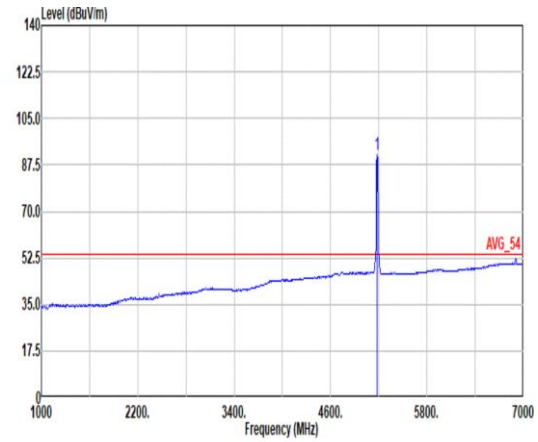 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 91.24 ------ ------ 80.17 33.34 10.79 33.06 0.00 284 86 AVERAGE

Mode	129	
	Harmonic	
	U-NII-1_5.15-5.25_802.11n HT20_CH36_Full RU_5180MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	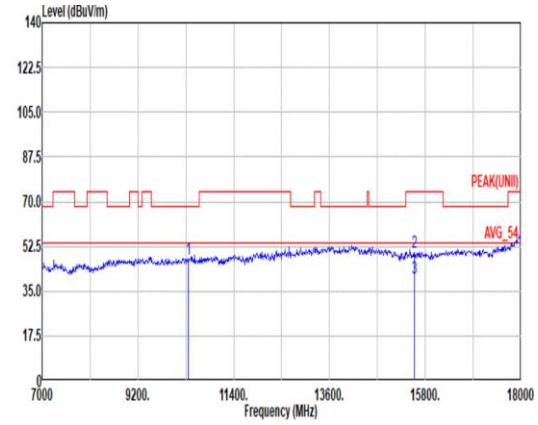 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10360.00 47.54 68.20 -20.66 59.00 38.72 17.20 67.63 0.25 -- -- PEAK 2 15540.00 49.95 74.00 -24.05 56.62 38.32 21.90 67.27 0.38 203 95 PEAK 3 15540.00 40.10 54.00 -13.90 46.77 38.32 21.90 67.27 0.38 203 95 Average	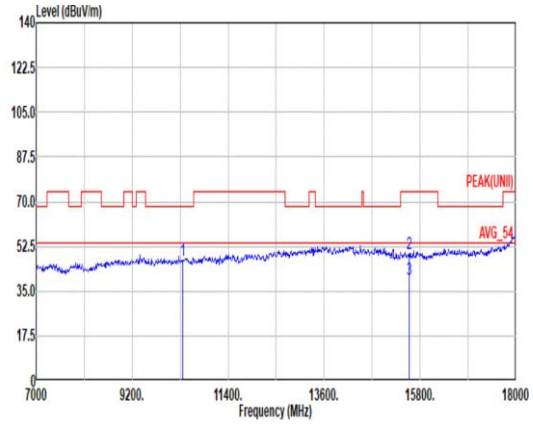 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10360.00 47.19 68.20 -21.01 58.65 38.72 17.20 67.63 0.25 -- -- PEAK 2 15540.00 49.59 74.00 -24.41 56.26 38.32 21.90 67.27 0.38 103 71 PEAK 3 15540.00 39.72 54.00 -14.28 46.39 38.32 21.90 67.27 0.38 103 71 Average

Mode	129	
	Harmonic	
	U-NII-1_5.15-5.25_802.11n HT20_CH36_Full RU_5180MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	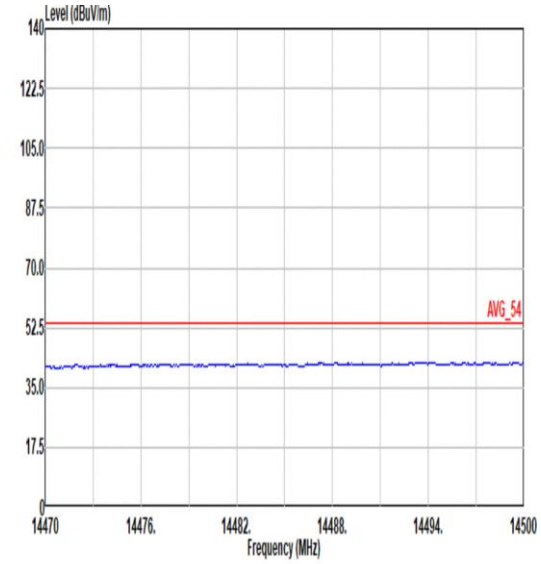 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL	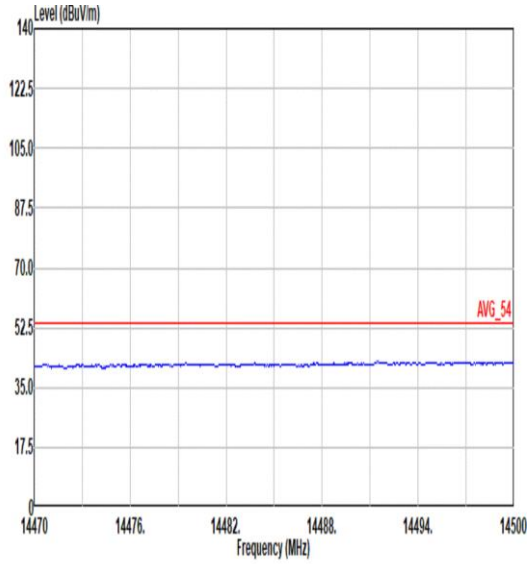 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL
17.7G ~18G Avg	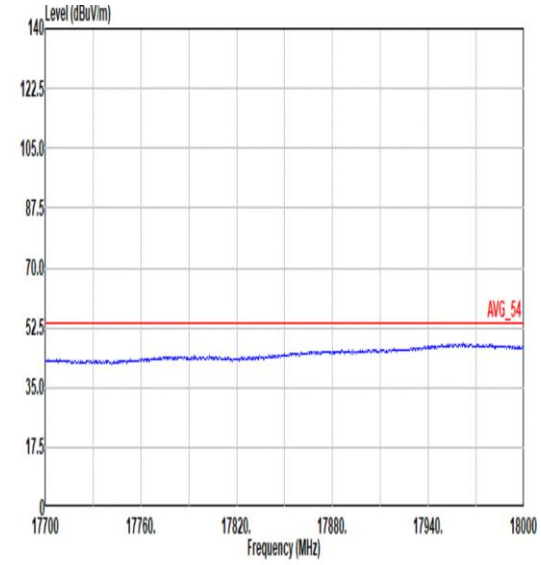 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL	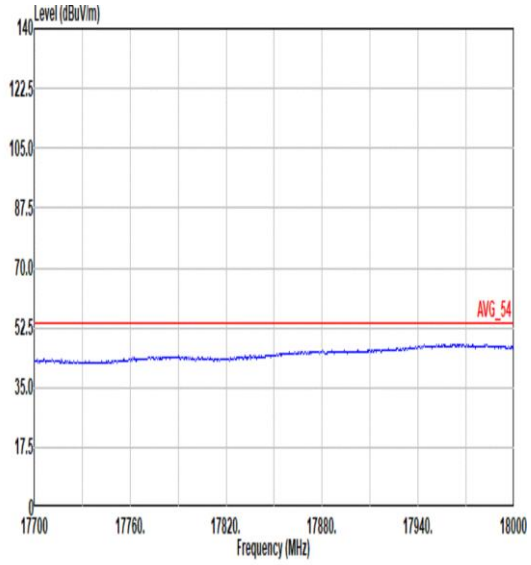 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL

Mode	130	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11n HT20_CH44_Full RU_5220MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	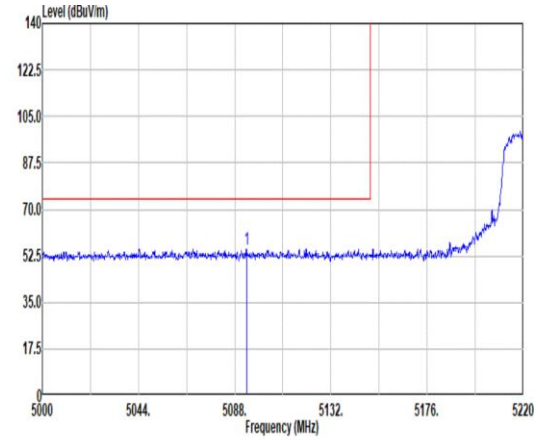 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5093.50 55.07 74.00 -18.93 44.30 33.20 10.60 33.03 0.00 100 63 PEAK	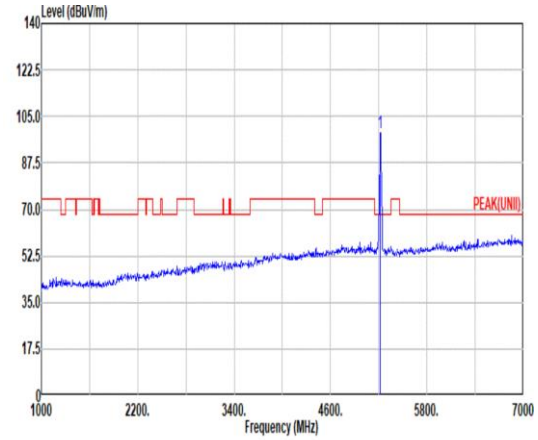 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5220.00 99.05 ------ ------ 87.93 33.26 10.93 33.07 0.00 100 63 PEAK
Avg	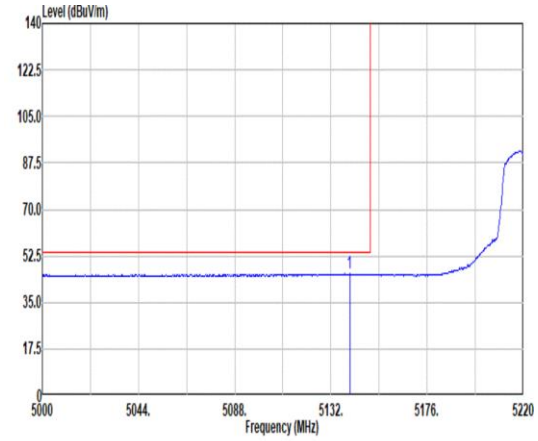 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5140.58 45.75 54.00 -8.25 34.74 33.36 10.70 33.05 0.00 100 63 AVERAGE	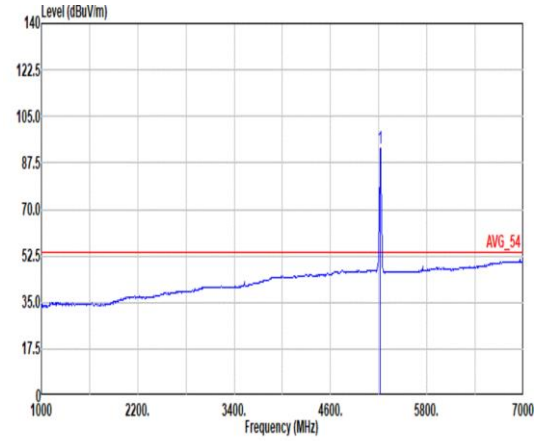 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5220.00 92.88 ------ ------ 81.76 33.26 10.93 33.07 0.00 100 63 AVERAGE

Mode	130	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11n HT20_CH44_Full RU_5220MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	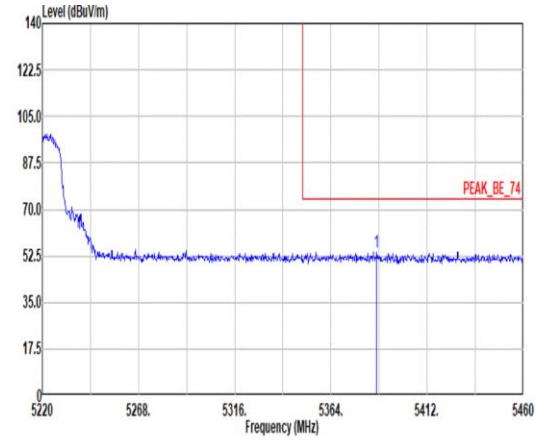 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5386.80 54.09 74.00 -19.91 42.30 33.03 11.89 33.13 0.00 100 63 PEAK	Blank
Avg	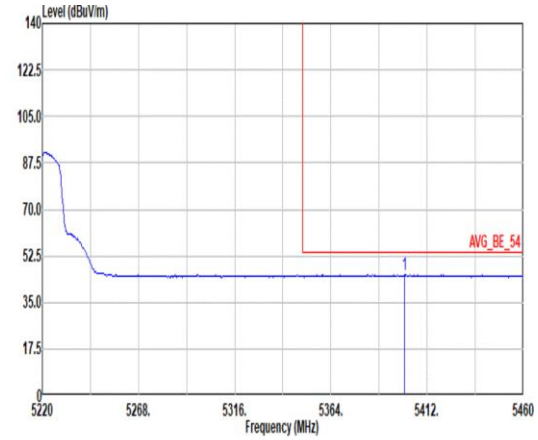 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5400.72 45.35 54.00 -8.65 33.53 33.00 11.96 33.14 0.00 100 63 AVERAGE	Blank

Mode	130	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11n HT20_CH44_Full RU_5220MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	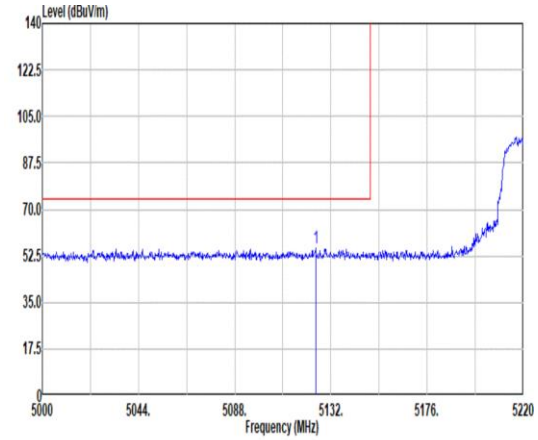 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5124.96 55.38 74.00 -18.62 44.46 33.30 10.66 33.04 0.00 300 83 PEAK	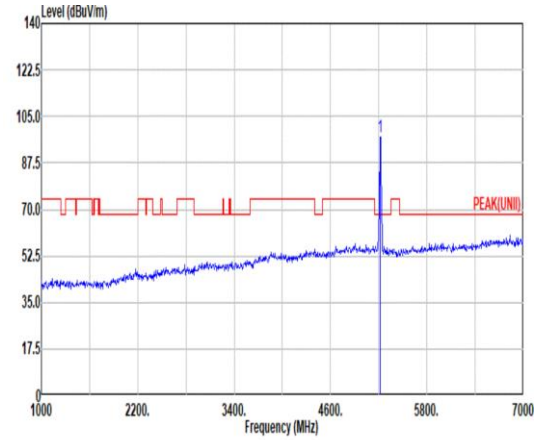 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5220.00 97.21 ------ ------ 86.09 33.26 10.93 33.07 0.00 300 83 PEAK
Avg	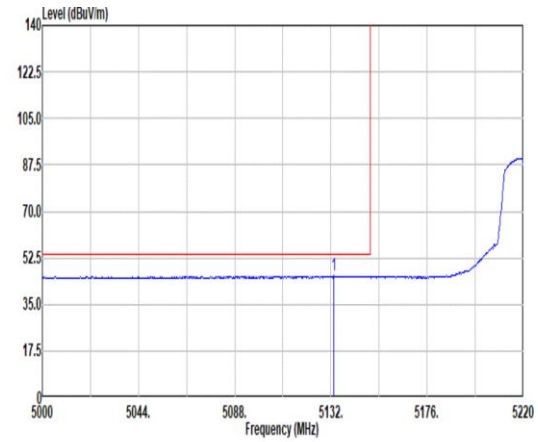 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5133.32 45.80 54.00 -8.20 34.84 33.33 10.68 33.05 0.00 300 83 AVERAGE	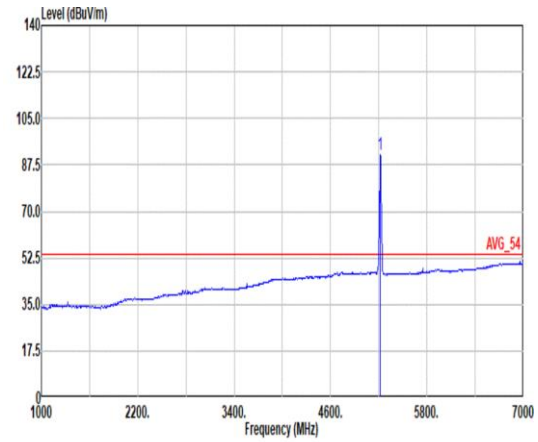 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5220.00 91.32 ------ ------ 80.20 33.26 10.93 33.07 0.00 300 83 AVERAGE

Mode	130	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11n HT20_CH44_Full RU_5220MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	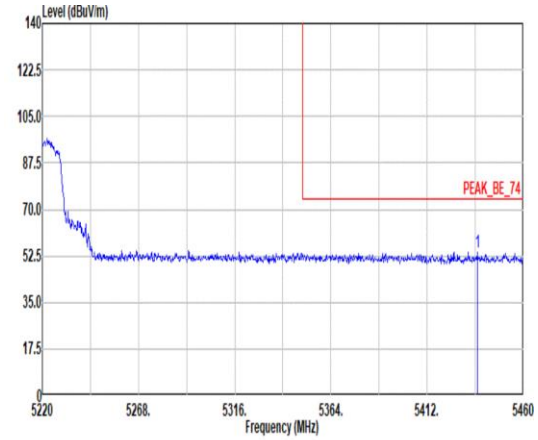 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5436.96 53.77 74.00 -20.23 42.17 33.00 11.75 33.15 0.00 300 83 PEAK	Blank
Avg	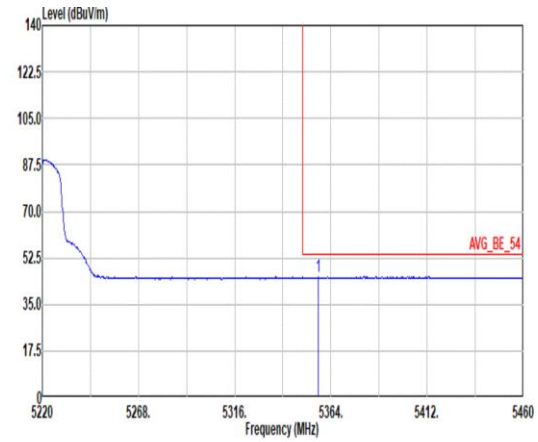 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5357.52 45.54 54.00 -8.46 33.86 33.08 11.72 33.12 0.00 300 83 AVERAGE	Blank

Mode	130	
	Harmonic	
	U-NII-1_5.15-5.25_802.11n HT20_CH44_Full RU_5220MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	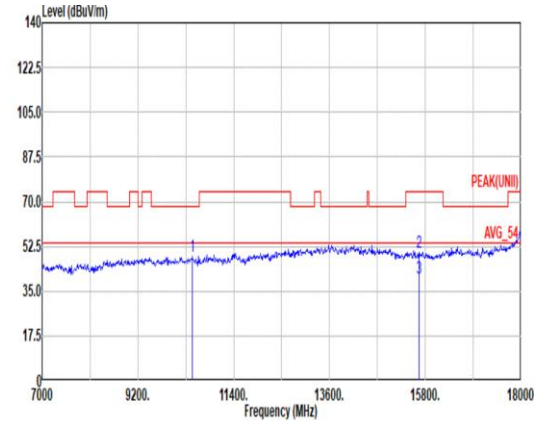 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10440.00 48.59 68.20 -19.61 59.96 38.72 17.18 67.52 0.25 -- -- PEAK 2 15660.00 49.97 74.00 -24.03 56.83 38.10 22.00 67.34 0.38 195 100 PEAK 3 15660.00 40.08 54.00 -13.92 46.94 38.10 22.00 67.34 0.38 195 100 Average	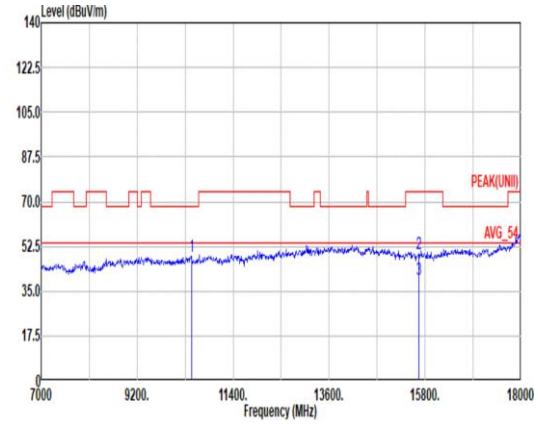 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10440.00 48.66 68.20 -19.54 60.03 38.72 17.18 67.52 0.25 -- -- PEAK 2 15660.00 49.47 74.00 -24.53 56.33 38.10 22.00 67.34 0.38 106 81 PEAK 3 15660.00 39.65 54.00 -14.35 46.51 38.10 22.00 67.34 0.38 106 81 Average

Mode	130	
	Harmonic	
	U-NII-1_5.15-5.25_802.11n HT20_CH44_Full RU_5220MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	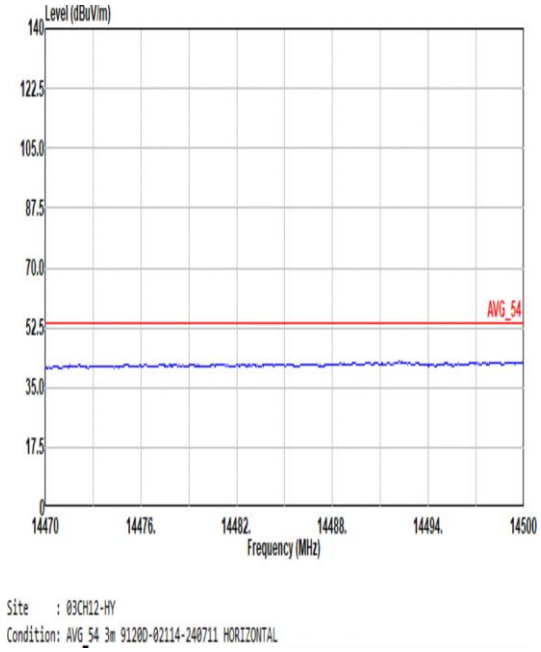	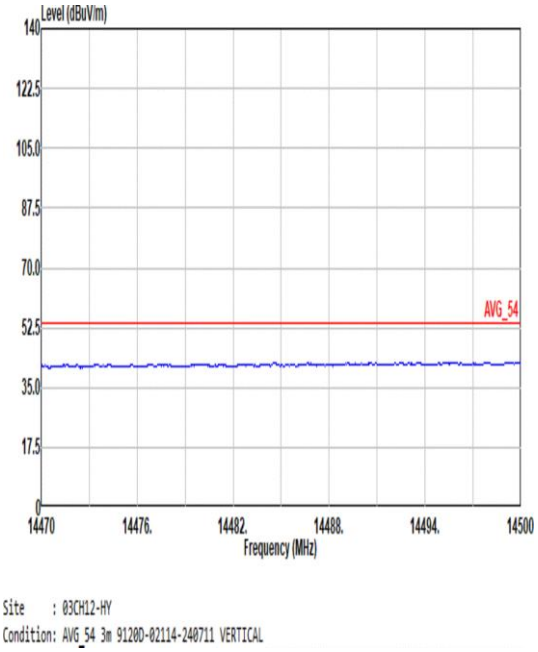
17.7G ~18G Avg	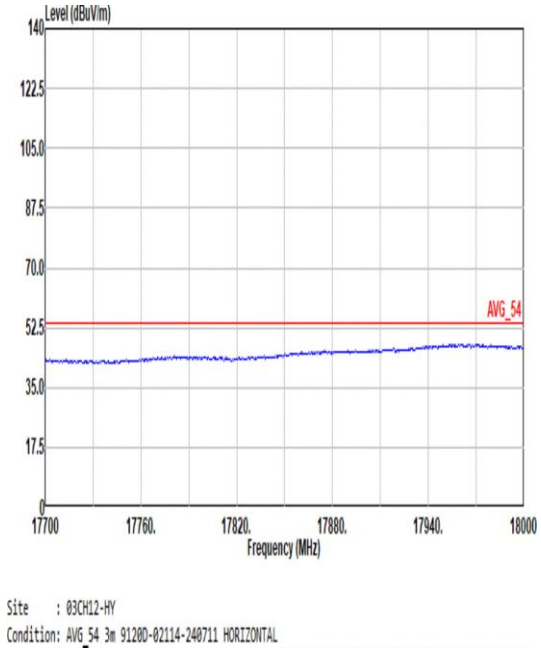	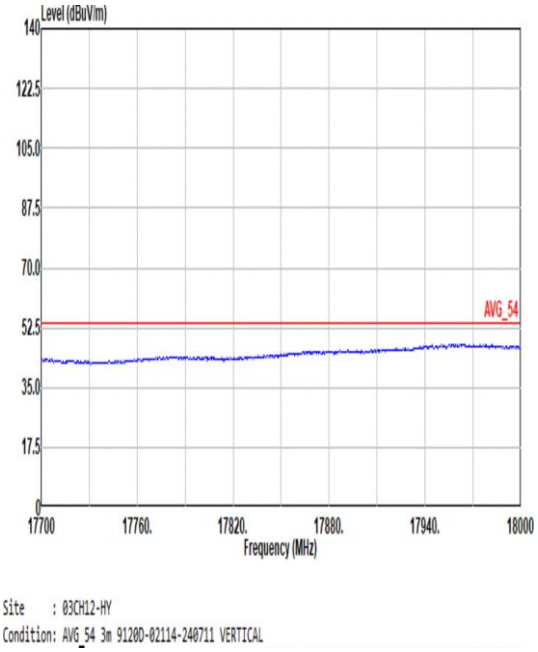

Mode	131	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11n HT20_CH48_Full RU_5240MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	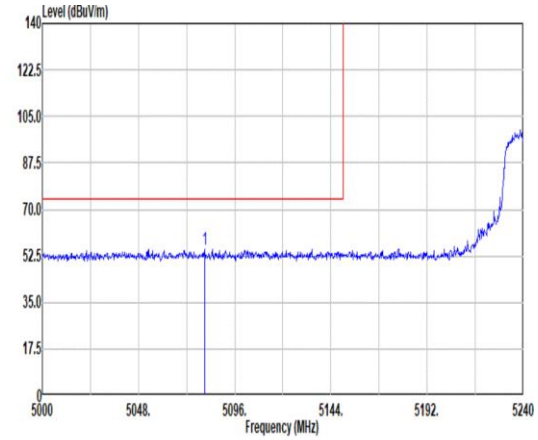 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5081.12 55.03 74.00 -18.97 44.29 33.20 10.57 33.03 0.00 103 66 PEAK	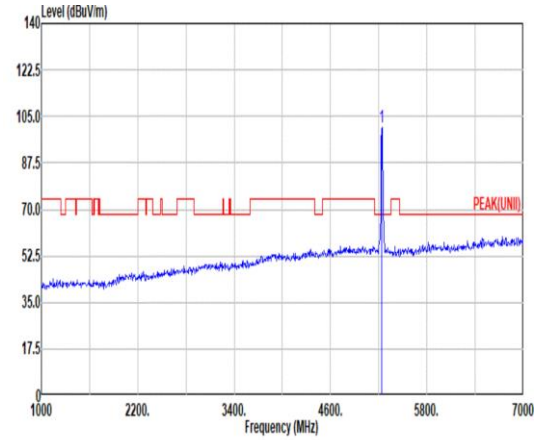 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5240.00 100.89 ------ ------ 89.68 33.22 11.07 33.08 0.00 103 66 PEAK
Avg	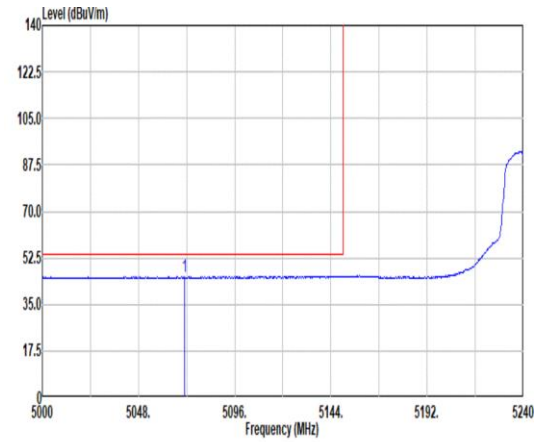 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5070.80 45.53 54.00 -8.47 34.80 33.20 10.55 33.02 0.00 103 66 AVERAGE	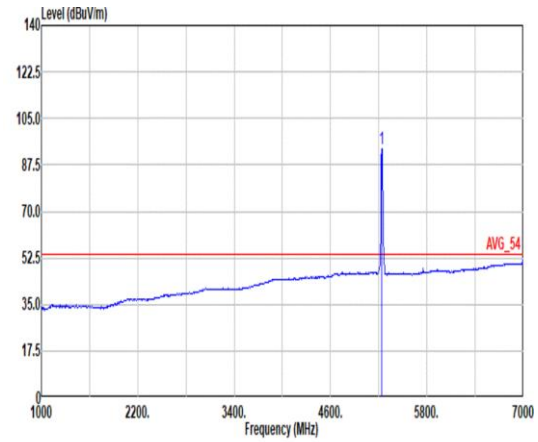 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5240.00 93.68 ------ ------ 82.50 33.23 11.03 33.08 0.00 103 66 AVERAGE

Mode	131	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11n HT20_CH48_Full RU_5240MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	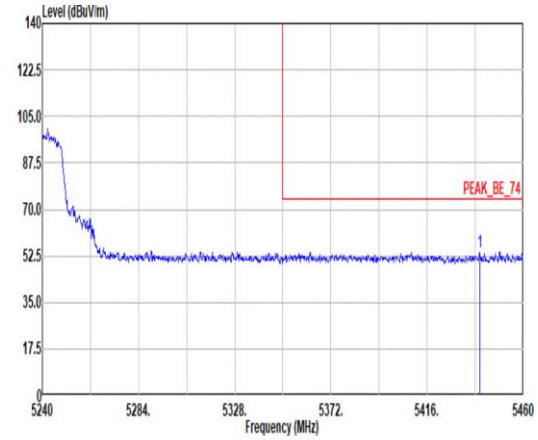 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5439.98 54.10 74.00 -19.90 42.51 33.00 11.74 33.15 0.00 103 66 PEAK	Blank
Avg	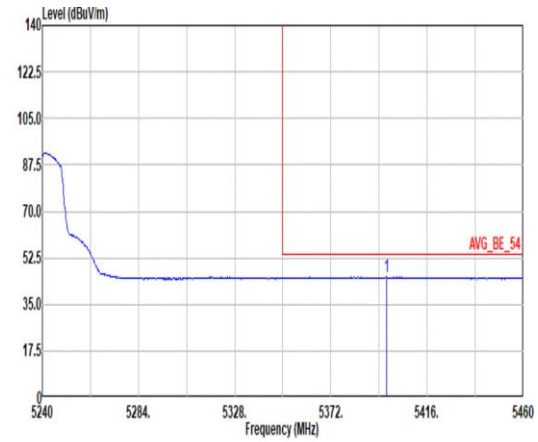 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5397.52 45.34 54.00 -8.66 33.53 33.00 11.95 33.14 0.00 103 66 AVERAGE	Blank

Mode	131	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11n HT20_CH48_Full RU_5240MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	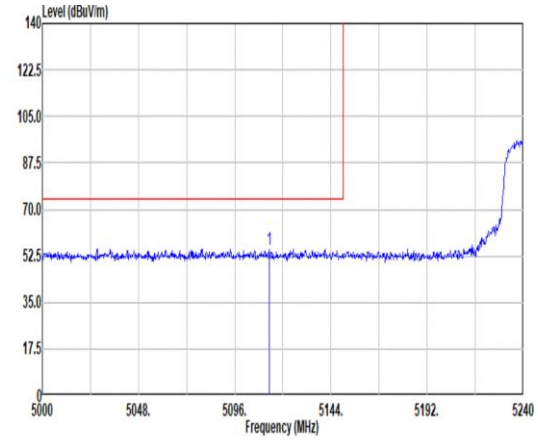 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5113.04 55.05 74.00 -18.95 44.20 33.25 10.64 33.04 0.00 278 89 PEAK	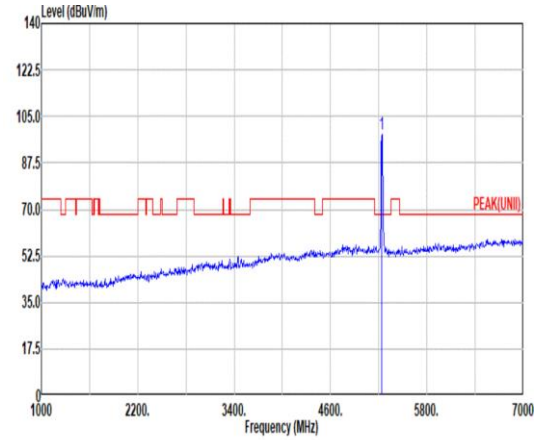 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5240.00 98.18 ------ ------ 86.97 33.22 11.07 33.08 0.00 278 89 PEAK
Avg	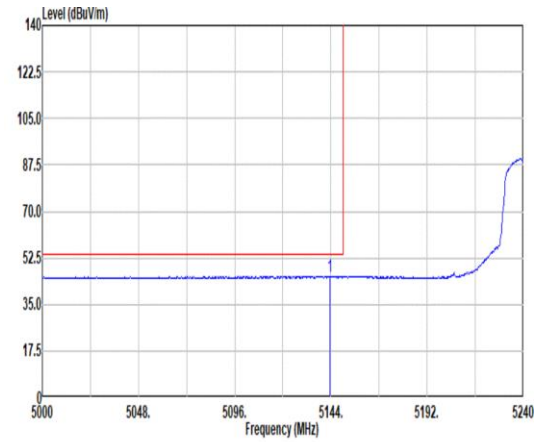 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5143.52 45.66 54.00 -8.34 34.63 33.37 10.71 33.05 0.00 278 89 AVERAGE	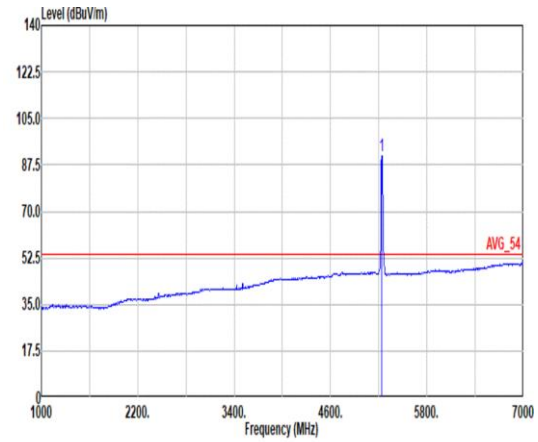 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5240.00 90.96 ------ ------ 79.75 33.22 11.07 33.08 0.00 278 89 AVERAGE

Mode	131	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11n HT20_CH48_Full RU_5240MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	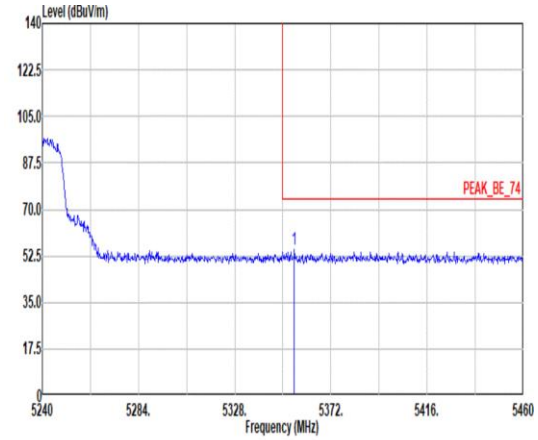 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5355.28 55.13 74.00 -18.87 43.45 33.09 11.71 33.12 0.00 278 89 PEAK	Blank
Avg	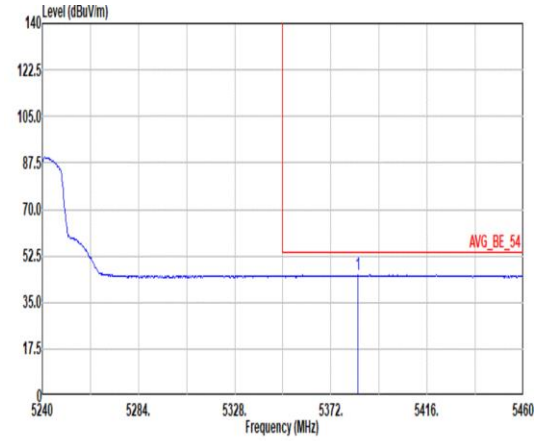 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5384.32 45.39 54.00 -8.61 33.62 33.03 11.87 33.13 0.00 278 89 AVERAGE	Blank