



RADIO TEST REPORT

Test Report No. : 13828808H-C-R1

Applicant : DENSO TEN Limited
Type of EUT : Car Navigation
Model Number of EUT : TN0022A
FCC ID : BABTN0022A
Test regulation : FCC Part 15 Subpart E: 2021
Test Result : Complied (Refer to SECTION 3)

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
6. This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
7. The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
8. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.
9. The information provided from the customer for this report is identified in Section 1.
10. This report is a revised version of 13828808H-C. 13828808H-C is replaced with this report.

Date of test: June 11 to October 19, 2021

Representative test engineer:

Junya Okuno
Engineer

Approved by:

Tsubasa Takayama
Leader



CERTIFICATE 5107.02

- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
☒ There is no testing item of "Non-accreditation".

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

REVISION HISTORY

Original Test Report No.: 13828808H-C

Revision	Test report No.	Date	Page revised	Contents
- (Original)	13828808H-C	October 20, 2021	-	-
1	13828808H-C-R1	October 27, 2021	P.11	Addition of Tested Antenna to Simultaneous transmission table
1	13828808H-C-R1	October 27, 2021	P.11	Correction of sentence *1) in Simultaneous transmission table

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	MCS	Modulation and Coding Scheme
AC	Alternating Current	MRA	Mutual Recognition Arrangement
AFH	Adaptive Frequency Hopping	N/A	Not Applicable
AM	Amplitude Modulation	NIST	National Institute of Standards and Technology
Amp, AMP	Amplifier	NS	No signal detect.
ANSI	American National Standards Institute	NSA	Normalized Site Attenuation
Ant, ANT	Antenna	NVLAP	National Voluntary Laboratory Accreditation Program
AP	Access Point	OBW	Occupied Band Width
ASK	Amplitude Shift Keying	OFDM	Orthogonal Frequency Division Multiplexing
Atten., ATT	Attenuator	P/M	Power meter
AV	Average	PCB	Printed Circuit Board
BPSK	Binary Phase-Shift Keying	PER	Packet Error Rate
BR	Bluetooth Basic Rate	PHY	Physical Layer
BT	Bluetooth	PK	Peak
BT LE	Bluetooth Low Energy	PN	Pseudo random Noise
BW	BandWidth	PRBS	Pseudo-Random Bit Sequence
Cal Int	Calibration Interval	PSD	Power Spectral Density
CCK	Complementary Code Keying	QAM	Quadrature Amplitude Modulation
Ch., CH	Channel	QP	Quasi-Peak
CISPR	Comite International Special des Perturbations Radioelectriques	QPSK	Quadri-Phase Shift Keying
CW	Continuous Wave	RBW	Resolution Band Width
DBPSK	Differential BPSK	RDS	Radio Data System
DC	Direct Current	RE	Radio Equipment
D-factor	Distance factor	RF	Radio Frequency
DFS	Dynamic Frequency Selection	RMS	Root Mean Square
DQPSK	Differential QPSK	RSS	Radio Standards Specifications
DSSS	Direct Sequence Spread Spectrum	Rx	Receiving
EDR	Enhanced Data Rate	SA, S/A	Spectrum Analyzer
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	SG	Signal Generator
EMC	ElectroMagnetic Compatibility	SVSWR	Site-Voltage Standing Wave Ratio
EMI	ElectroMagnetic Interference	TR	Test Receiver
EN	European Norm	Tx	Transmitting
ERP, e.r.p.	Effective Radiated Power	VBW	Video BandWidth
EU	European Union	Vert.	Vertical
EUT	Equipment Under Test	WLAN	Wireless LAN
Fac.	Factor		
FCC	Federal Communications Commission		
FHSS	Frequency Hopping Spread Spectrum		
FM	Frequency Modulation		
Freq.	Frequency		
FSK	Frequency Shift Keying		
GFSK	Gaussian Frequency-Shift Keying		
GNSS	Global Navigation Satellite System		
GPS	Global Positioning System		
Hori.	Horizontal		
ICES	Interference-Causing Equipment Standard		
IEC	International Electrotechnical Commission		
IEEE	Institute of Electrical and Electronics Engineers		
IF	Intermediate Frequency		
ILAC	International Laboratory Accreditation Conference		
ISED	Innovation, Science and Economic Development Canada		
ISO	International Organization for Standardization		
JAB	Japan Accreditation Board		
LAN	Local Area Network		
LIMS	Laboratory Information Management System		

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

CONTENTS	PAGE
SECTION 1: Customer information.....	5
SECTION 2: Equipment under test (EUT).....	5
SECTION 3: Test specification, procedures & results.....	7
SECTION 4: Operation of EUT during testing.....	10
SECTION 5: Radiated Spurious Emission and Band Edge Compliance.....	16
SECTION 6: Antenna Terminal Conducted Tests.....	19
APPENDIX 1: Test data	20
99 % Occupied Bandwidth	20
6 dB Bandwidth	28
Maximum Conducted Output Power	32
Average Output Power.....	38
Maximum Power Spectral Density	48
Radiated Spurious Emission	66
Conducted Spurious Emission	101
APPENDIX 2: Test instruments	102
APPENDIX 3: Photographs of test setup	104
Radiated Spurious Emission	104
Antenna Terminal Conducted Tests.....	105

s

SECTION 1: Customer information

Company Name	:	DENSO TEN Limited
Address	:	2-28, Goshō-dori 1-Chome, Hyogo-ku, Kobe, 652-8510 JAPAN
Telephone Number	:	+81-78-682-2159
Facsimile Number	:	+81-78-682-2169
Contact Person	:	Kaoru Abe

The information provided from the customer is as follows;

- Applicant, Type of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer information
- SECTION 2: Equipment under test (EUT) other than the Receipt Date
- SECTION 4: Operation of EUT during testing

* The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

SECTION 2: Equipment under test (EUT)

2.1 Identification of EUT

Type	:	Car Navigation
Model Number	:	TN0022A
Serial Number	:	Refer to SECTION 4.2
Rating	:	DC 12 V
Receipt Date	:	June 4, 2021
Country of Mass-production	:	Japan
Condition	:	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	:	No Modification by the test lab.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

2.2 Product Description

Model: TN0022A (referred to as the EUT in this report) is a Car Navigation.

Radio Specification

Radio Type : Transceiver
 Clock frequency(ies) : 7.3333333 GHz

	IEEE802.11b	IEEE802.11g/n (20 M band)	IEEE802.11a/n/ac (20 M band)	IEEE802.11n/ac (40 M band)	IEEE802.11ac (80 M band)
Frequency of operation	2412 MHz - 2462 MHz	2412 MHz - 2462 MHz	5180 MHz - 5240 MHz 5745 MHz - 5825 MHz	5190 MHz - 5230 MHz 5755 MHz - 5795 MHz	5210 MHz 5775 MHz
Type of modulation	DSSS (CCK, DQPSK, DBPSK)	OFDM-CCK (64QAM, 16QAM, QPSK, BPSK)	OFDM (64QAM, 16QAM, QPSK, BPSK, 256QAM (IEEE802.11ac only))		
Channel spacing	5MHz		20MHz	40MHz	80MHz
Antenna type	Inverted F Antenna				
Antenna Connector type	U.FL-R-SMT-1(80)				
Antenna Gain	-1.59 dBi (Peak): 2.4 GHz Band 2.92 dBi (Peak) (ANT 1) / 2.11 dBi (Peak) (ANT 2) : 5 GHz Band				

	Bluetooth Ver.5.0 with EDR function
Frequency of operation	2402 MHz - 2480 MHz
Type of modulation	BT: FHSS (GFSK, $\pi/4$ -DQPSK, 8-DPSK) LE: GFSK
Channel spacing	BT: 1 MHz LE: 2 MHz
Antenna type	Inverted F Antenna
Antenna Connector type	U.FL-R-SMT-1(80)
Antenna Gain	-1.7 dBi (Peak)

	Broadcast Receiver
Radio Type	Receiver
Frequency of Operation	AM, HD_AM: 530 kHz - 1710 kHz FM, RBDS/HD_FM: 87.75 MHz - 107.9 MHz SDARS: 2320 MHz - 2345 MHz
Channel spacing	AM, HD_AM: 10 kHz FM, RBDS/HD_FM: 200 kHz
Antenna connector type	HFC IV

*1) This test report applies to WLAN (5 GHz Band) only.

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart E
FCC Part 15 final revised on May 3, 2021 and effective July 2, 2021

Title : FCC 47 CFR Part 15 Radio Frequency Device Subpart E
Unlicensed National Information Infrastructure Devices
Section 15.407 General technical requirements

* The revision does not affect the test result conducted before its effective date.

3.2 Procedures and results

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013 ISED: RSS-Gen 8.8	FCC: 15.407 (b) (6) / 15.207 ISED: RSS-Gen 8.8	-	N/A	*1)
26 dB Emission Bandwidth	FCC: KDB Publication Number 789033 ISED: -	FCC: 15.407 (a) (1) (2) (3) ISED: -	-	N/A	*2)
Maximum Conducted Output Power	FCC: KDB Publication Number 789033 ISED: -	FCC: 15.407 (a) (1) (2) (3) ISED: RSS-247 6.2.1.1 6.2.2.1 6.2.3.1 6.2.4.1	See data	Complied a)	Conducted
Maximum Power Spectral Density	FCC: KDB Publication Number 789033 ISED: -	FCC: 15.407 (a) (1) (2) (3) ISED: RSS-247 6.2.1.1 6.2.2.1 6.2.3.1 6.2.4.1		Complied b)	Conducted
Spurious Emission Restricted Band Edge	FCC: ANSI C63.10-2013 KDB Publication Number 789033 ISED: -	FCC: 15.407 (b), 15.205 and 15.209 ISED: RSS-247 6.2.1.2 6.2.2.2 6.2.3.2 6.2.4.2	9.2 dB 1580.000 MHz, AV, Vert.	Complied c) / d)	Conducted (< 30 MHz)/ Radiated (> 30 MHz) *3)
6 dB Emission Bandwidth	FCC: ANSI C63.10-2013 ISED: -	FCC: 15.407 (e) ISED: RSS-247 6.2.4.1	See data	Complied e)	Conducted

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

*1) The test is not applicable since the EUT is not the device that is designed to be connected to the public utility (AC) power line.

*2) The test is not applicable since the EUT does not support to W53 and W56 bands.

*3) Radiated test was selected over 30 MHz based on FCC 15.407 (b) and KDB 789033 D02 G.3.b).

a) Refer to APPENDIX 1 (data of Maximum Conducted Output Power)

b) Refer to APPENDIX 1 (data of Maximum Power Spectral Density)

c) Refer to APPENDIX 1 (data of Radiated Spurious Emission)

d) Refer to APPENDIX 1 (data of Conducted Spurious Emission)

e) Refer to APPENDIX 1 (data of 6 dB Bandwidth)

Symbols:

Complied The data of this test item has enough margin, more than the measurement uncertainty.

Complied# The data of this test item meets the limits unless the measurement uncertainty is taken into consideration.

* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

FCC Part 15.31 (e)

This EUT provides stable voltage constantly to RF Module regardless of input voltage. Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99 % Occupied Band Width	ISED: RSS-Gen 6.7	ISED: -	N/A	- a)	Conducted
a) Refer to APPENDIX 1 (data of 99 % Occupied Bandwidth)					

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

There is no applicable rule of uncertainty in this applied standard. Therefore, the following results are derived depending on whether or not laboratory uncertainty is applied.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.
Ise EMC Lab.

Antenna Terminal test

Test Item	Uncertainty (+/-)
20 dB Bandwidth / 99 % Occupied Bandwidth	0.96 %
Maximum Peak Output Power / Average Output Power	1.4 dB
Carrier Frequency Separation	0.42 %
Dwell time / Burst rate	0.10 %
Conducted Spurious Emission	2.6 dB

Radiated emission

Measurement distance	Frequency range	Uncertainty (+/-)
3 m	9 kHz to 30 MHz	3.3 dB
10 m		3.2 dB
3 m	30 MHz to 200 MHz (Horizontal) (Vertical)	4.8 dB
		5.0 dB
	200 MHz to 1000 MHz (Horizontal) (Vertical)	5.2 dB
		6.3 dB
10 m	30 MHz to 200 MHz (Horizontal) (Vertical)	4.8 dB
		4.8 dB
	200 MHz to 1000 MHz (Horizontal) (Vertical)	5.0 dB
		5.0 dB
3 m	1 GHz to 6 GHz	4.9 dB
	6 GHz to 18 GHz	5.2 dB
1 m	10 GHz to 26.5 GHz	5.5 dB
	26.5 GHz to 40 GHz	5.5 dB
10 m	1 GHz to 18 GHz	5.2 dB

3.5 Test Location

UL Japan, Inc. Ise EMC Lab.

*A2LA Certificate Number: 5107.02 / FCC Test Firm Registration Number: 884919

ISED Lab Company Number: 2973C / CAB identifier: JP0002

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.5 measurement room	6.4 x 6.4 x 3.0	6.4 x 6.4	-	-
No.6 shielded room	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.10 shielded room	3.8 x 2.8 x 2.8	3.8 x 2.8	-	-
No.11 measurement room	4.0 x 3.4 x 2.5	N/A	-	-
No.12 measurement room	2.6 x 3.4 x 2.5	N/A	-	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0 m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 4: Operation of EUT during testing

4.1 Operating Mode(s)

Test operating mode was determined as follows according to “Section 1 of 6 802.11 a/b/g/n testing - Managing Complex Regulatory Approvals -” of TCB Council Workshop October 2009.

Mode	Remarks*
IEEE 802.11a (11a)	54 Mbps, PN9
IEEE 802.11n SISO 20 MHz BW (11n-20)	MCS 7 (Short GI), PN9
IEEE 802.11n SISO 40 MHz BW (11n-40)	MCS 7 (Short GI), PN9
IEEE 802.11ac SISO 20 MHz BW (11ac-20)	MCS 7 (Short GI), PN9
IEEE 802.11ac SISO 40 MHz BW (11ac-40)	MCS 7 (Short GI), PN9
IEEE 802.11ac SISO 80 MHz BW (11ac-80)	MCS 7 (Short GI), PN9
*Power of the EUT was set by the software as follows; Power settings: 11a: 7.5 dBm 11n-20: 6.5 dBm 11n-40: 5.5 dBm 11ac-20: 6.5 dBm (5.5 dBm for MCS 8) 11ac-40: 5.5 dBm (3.5 dBm for MCS 8 and MCS 9) 11ac-80: 4.5 dBm (2.5 dBm for MCS 8 and MCS 9) Software: QCA RCT Ver 3.0.144.0 (Date: October 9, 2017) TeraTerm ver.4.104 (Date: August 30, 2019) (Date: October 9, 2017, Storage location: Driven by connected PC) *This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.	

*The details of Operation mode(s)

Test Item	Operating Mode	Tested Antenna *2)	Tested Frequency			
			Lower Band	Middle Band	Additional Band	Upper Band
99 % Occupied Bandwidth, 6 dB Bandwidth,	11a Tx	2	5180 MHz	-	-	5745 MHz
	11n-20 Tx		5220 MHz	-	-	5785 MHz
	11ac-20 Tx		5240 MHz	-	-	5825 MHz
	11n-40 Tx	2	5190 MHz	-	-	5755 MHz
	11ac-40 Tx		5230 MHz	-	-	5795 MHz
	11ac-80 Tx	2	5210 MHz	-	-	5775 MHz
Maximum Power Spectral Density	11a Tx	1, 2	5180 MHz	-	-	5745 MHz
	11n-20 Tx		5220 MHz	-	-	5785 MHz
	11ac-20 Tx		5240 MHz	-	-	5825 MHz
	11n-40 Tx	1, 2	5190 MHz	-	-	5755 MHz
	11ac-40 Tx		5230 MHz	-	-	5795 MHz
	11ac-80 Tx	1, 2	5210 MHz	-	-	5775 MHz
Maximum Conducted Output Power	11a Tx	1, 2	5180 MHz	-	-	5745 MHz
	11n-20 Tx		5220 MHz	-	-	5785 MHz
	11ac-20 Tx		5240 MHz	-	-	5825 MHz
	11n-40 Tx	1, 2	5190 MHz	-	-	5755 MHz
	11ac-40 Tx		5230 MHz	-	-	5795 MHz
	11ac-80 Tx	1, 2	5210 MHz	-	-	5775 MHz
Radiated Spurious Emission (Below 1 GHz)	11a Tx *1)	1	5180 MHz	-	-	-
Radiated Spurious Emission (Above 1 GHz)	11a Tx	1	5180 MHz	-	-	5745 MHz
	11ac-20 Tx		5220 MHz	-	-	5785 MHz
	*3)		5240 MHz	-	-	5825 MHz
	11ac-40 Tx	1	5190 MHz	-	-	5755 MHz
	*3)		5230 MHz	-	-	5795 MHz
	11ac-80 Tx	1	5210 MHz	-	-	5775 MHz
Conducted Spurious Emission	11a Tx *1)	1	5180 MHz	-	-	-
*1) The mode was tested as a representative, because it had the highest power at antenna terminal test. *2) The worst antenna (Ant: x) and condition was determined as follows: 1: Radiated Spurious Emission: Used Ant:1 based on the result of Maximum Conducted Output Power (e.i.r.p). 2: Antenna Terminal Conducted test on the limit which is not considered antenna gain: Used Ant 2: based on the result of Conducted Output power. 3: Antenna Terminal Conducted test on the limit which is considered antenna gain: Used Ant 1: based on the result of Conducted Output power (e.i.r.p.) 4: Antenna Terminal Conducted test on the limit which has both condition 2 and 3: Used Ant 1 and Ant 2 *3) Since 11n-20 and 11ac-20, 11n-40 and 11ac-40, have the same modulation method and no differences in transmitting specification, test was performed on the representative mode that had the highest output power.						

Simultaneous transmission

Test Item	Mode *1)	Tested Antenna
Radiated Spurious Emission	Tx 11a 5745 MHz + Tx BT DH5 Hopping On	11a (Antenna 2) + Bluetooth (Antenna 2)
*1) The test was performed on the mode as a representative, because it had the highest power (Bluetooth DH5) of Bluetooth at antenna terminal test.		

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

4.2 Configuration and peripherals

For Antenna Terminal Conducted test

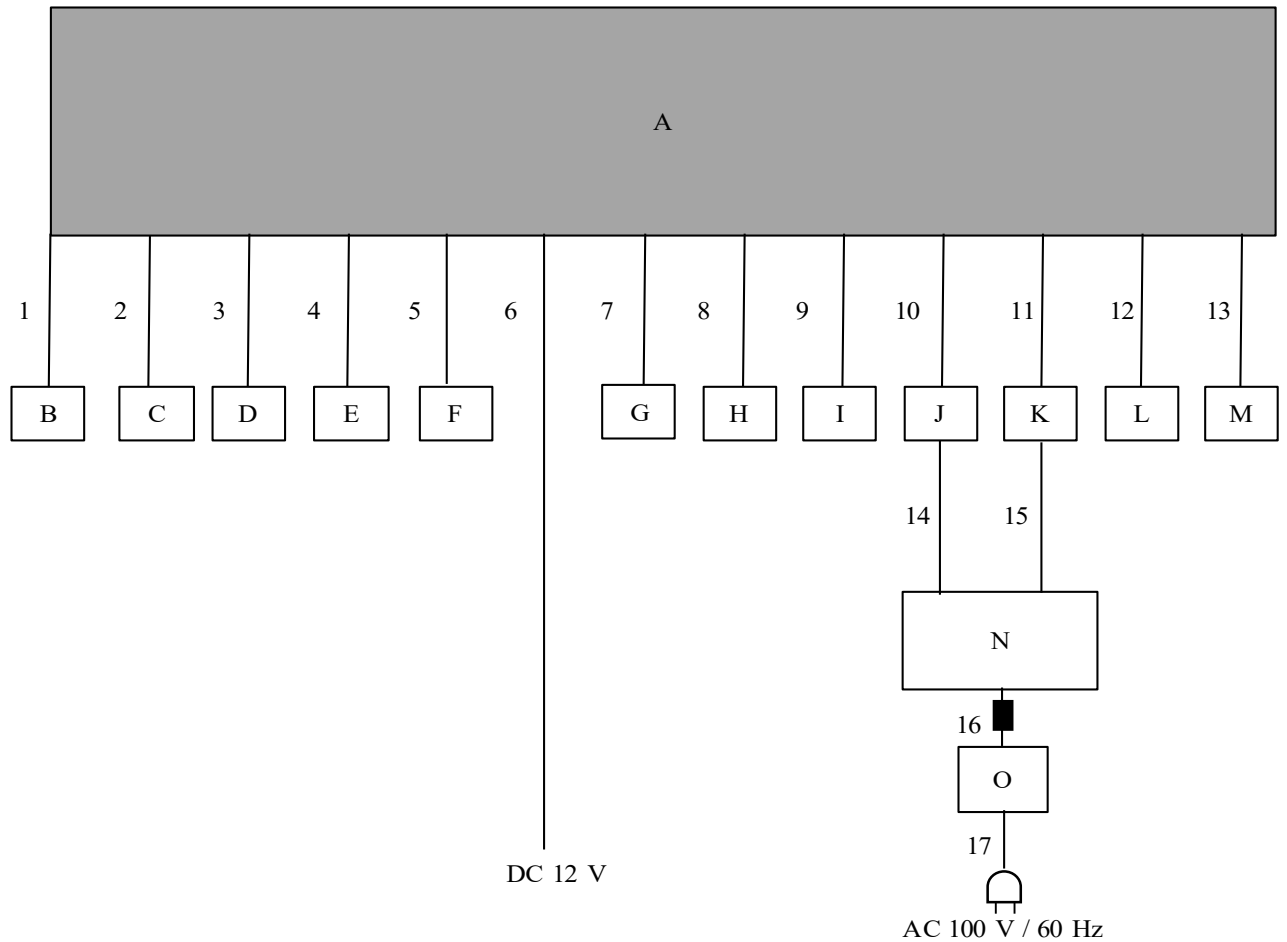

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Car Navigation	TN0022A	AT200008	DENSO TEN Limited	EUT
B	Switch	-	-	-	-
C	DCM	19MC_DCM	86741-48071	DENSO Corporation	-
D	Steering Switch	PA6-GF30	39	TOYOTA	-
E	Low noise Amp	ZX60-242	GLN-S+	Mini-Circuits	-
F	GPS Antenna	23D900113	48	yokowo co.,ltd.	-
G	FM/AM connector (Main)	86300-30C30	146000-63300101	DENSO TEN Limited	-
H	FM/AM connector (Sub)	86300-30C70	146000-63400101	DENSO TEN Limited	-
I	Back Camera	GP-KD7301RC	85C602752	Panasonic	-
J	USB LAN transfer	ETX3-US2	G000024	I-O DATA	-
K	Jig Board	135943-58990920	3700980A186	DENSO TEN Limited	-
L	Mic	SDA3510A	0AC067100	Panasonic	-
M	Mic	SDA3510A	0AC067082	Panasonic	-
N	Laptop PC	CF-LX4EDHCS	5GKSA17377	Panasonic	-
O	AC Adapter	CF-AA62J2C	64B2CM114703755B	Panasonic	-

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	Signal Cable	2.4	Unshielded	Unshielded	-
2	Signal Cable	2.4	Unshielded	Unshielded	-
3	Signal Cable	2.4	Unshielded	Unshielded	-
4	Signal Cable	1.0	Unshielded	Unshielded	-
5	GNSS Antenna Cable	2.6	Shielded	Shielded	-
6	DC Cable	3.4	Unshielded	Unshielded	-
7	Signal Cable	2.6	Unshielded	Unshielded	-
8	Signal Cable	2.6	Unshielded	Unshielded	-
9	Signal Cable	2.4	Unshielded	Unshielded	-
10	USB Cable	3.2	Shielded	Shielded	-
11	Signal Cable	0.1	Unshielded	Unshielded	-
12	Signal Cable	2.7	Unshielded	Unshielded	-
13	Signal Cable	2.7	Unshielded	Unshielded	-
14	LAN Cable	1.0	Unshielded	Unshielded	-
15	USB Cable	0.2	Shielded	Shielded	-
16	DC Cable	0.9	Unshielded	Unshielded	-
17	AC Cable	0.8	Unshielded	Unshielded	-

UL Japan, Inc.


Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

For Radiated Spurious Emission test

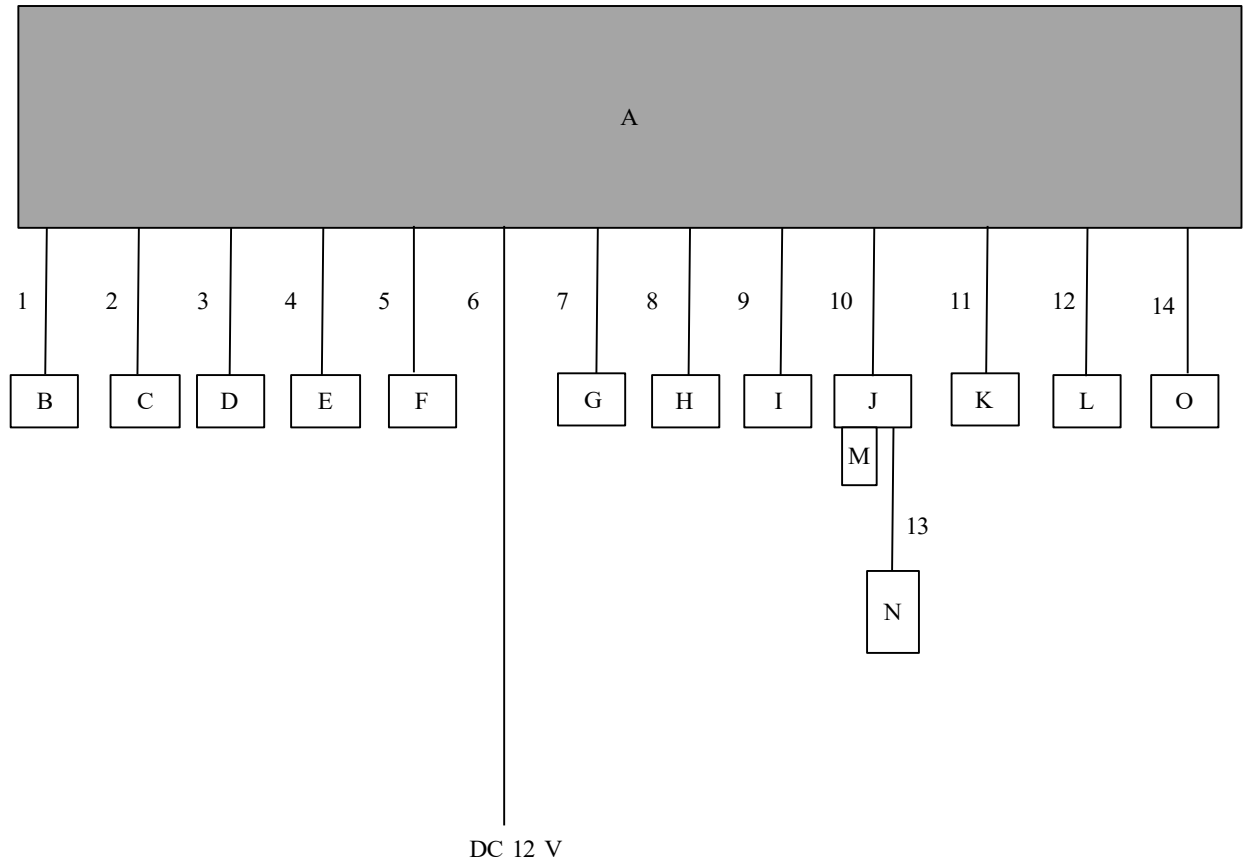

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Car Navigation	TN0022A	AT200016	DENSO TEN Limited	EUT
B	Switch	-	-	-	-
C	DCM	19MC_DCM	E-033720026/006	DENSO Corporation	-
D	Steering Switch	PA6-GF30	48	TOYOTA	-
E	Low noise Amp	ZX60-242GLN-S+	S 2036302044	Mini-Circuits	-
F	GPS Antenna	23D90058	No.17	yokowo co.,ltd.	-
G	FM/AM connector (Main)	86300-30C30	PS600112	DENSO TEN Limited	-
H	FM/AM connector (Sub)	86300-30C70	PS6020494	DENSO TEN Limited	-
I	Back Camera	GP-KD7301RC	64F000037	Panasonic	-
J	USB/AUX socket	86190-12040	No.17	Kojima Industries Corporation	-
K	Mic	SDA3510A	0DC040830	Panasonic	-
L	Mic	SDA3510A	0DC040817	Panasonic	-
M	USB Memory	USM4GR B	17116 DGGNN	SONY	-
N	iPod touch	A1367	CCQ50WDDCPC	Apple	-
O	Speaker Dummy	-	-	-	-

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	Signal Cable	2.4	Unshielded	Unshielded	-
2	Signal Cable	2.4	Unshielded	Unshielded	-
3	Signal Cable	2.4	Unshielded	Unshielded	-
4	Signal Cable	1.0	Unshielded	Unshielded	-
5	GNSS Antenna Cable	2.6	Shielded	Shielded	-
6	DC Cable	3.4	Unshielded	Unshielded	-
7	Signal Cable	2.6	Unshielded	Unshielded	-
8	Signal Cable	2.6	Unshielded	Unshielded	-
9	Signal Cable	2.4	Unshielded	Unshielded	-
10	USB Cable	3.2	Shielded	Shielded	-
11	Signal Cable	2.7	Unshielded	Unshielded	-
12	Signal Cable	2.7	Unshielded	Unshielded	-
13	Audio Cable	1.5	Shielded	Shielded	-
14	Speaker Cable	3.2	Unshielded	Unshielded	-

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 5: Radiated Spurious Emission and Band Edge Compliance

Test Procedure

< Below 1GHz >

EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

< Above 1GHz >

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

< Below 1GHz >

The result also satisfied with the general limits specified in section 15.209 (a).

< Above 1GHz >

Inside of restricted bands (Section 15.205):

Apply to limit in the Section 15.209 (a).

Outside of the restricted bands:

Apply to limit 68.2 dBuV/m, 3 m (-27 dBm e.i.r.p. *) in the Section 15.407 (b) (1) (2) (3).

For W58 Bandedge

-27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge in the section 15.407(b)(4)(i).

Restricted band edge:

Apply to limit in the Section 15.209 (a).

Since this limit is severer than the limit of the inside of restricted bands.

*Electric field strength to e.i.r.p. conversion:

$$E = \frac{1000000 \sqrt{30P}}{3} \text{ (uV/m)} \quad : P \text{ is the e.i.r.p. (Watts)}$$

Test Antennas are used as below;


Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

Frequency	Below 1 GHz	Above 1 GHz	
Instrument used	Test Receiver	Spectrum Analyzer	
Detector	QP	Peak	Average
IF Bandwidth	BW: 120 kHz	RBW: 1 MHz VBW: 3 MHz	Method AD *1) RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (RMS) Trace: ≥ 100 traces If duty cycle was less than 98%, a duty factor was added to the results.

*1) The test method was also referred to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E".

Figure 2: Test Setup


Below 1 GHz

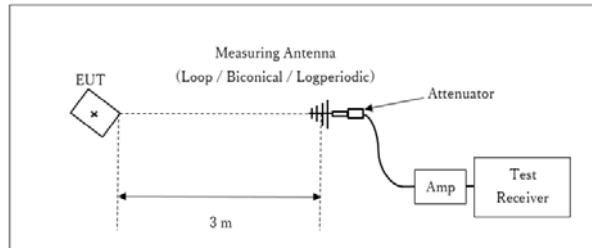

x : Center of turn table

Test Distance: 3 m

1 GHz - 10 GHz

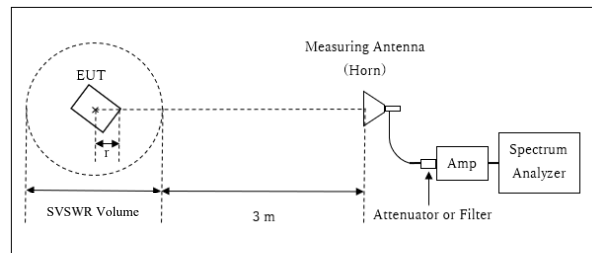

r : Radius of an outer periphery of EUT

x : Center of turn table

Distance Factor: $20 \times \log (3.55 \text{ m} / 3.0 \text{ m}) = 1.47 \text{ dB}$


* Test Distance: $(3 + \text{SVSWR Volume} / 2) - r = 3.55 \text{ m}$

SVSWR Volume : 1.5 m

(SVSWR Volume has been calibrated based on CISPR 16-1-4.)

$r = 0.2 \text{ m}$

10 GHz - 40 GHz

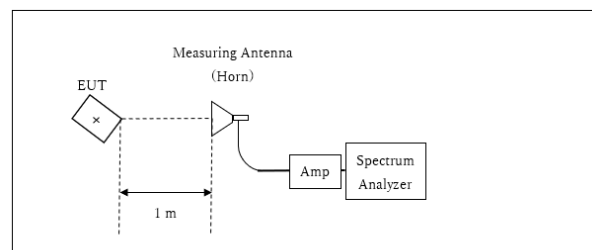

x : Center of turn table

Distance Factor: $20 \times \log (1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

*Test Distance: 1 m

The test was made on EUT at the normal use position.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range	: 30 MHz - 40 GHz
Test data	: APPENDIX
Test result	: Pass

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 6: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument used and Test method
99 % Occupied Bandwidth *1)	Enough width to display emission skirts	1 % to 5 % of OBW	≥ 3 RBW	Auto	Peak	Max Hold	Spectrum Analyzer
6 dB Bandwidth	Enough to capture the emission	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Conducted Output Power	-	-	-	Auto	Average	-	Power Meter (Sensor: 80 MHz BW) (Method PM-G)
Maximum Power Spectral Density	Encompass the entire EBW	1 MHz or 470 kHz *2)	≥ 3 RBW	Auto	RMS or Sample Power Averaging (200 times)	Clear Write	Spectrum Analyzer
Conducted Spurious Emission*3) *4)	9 kHz – 150 kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150 kHz – 30 MHz	9.1 kHz	27 kHz				

* The test method was also referred to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E".

*1) Peak hold was applied as Worst-case measurement.

*2) KDB 789033 D02 says that RBW is set to be 500 kHz for 5.725 GHz-5.850 GHz, but it is not possible with spectrum analyzer, so RBW Correction Factor ($10 \log(500 \text{ kHz} / 470 \text{ kHz})$) was added to the test result.

*3) In the frequency range below 30 MHz, RBW was narrowed to separate the noise contents.

Then, wide-band noise near the limit was checked separately, however the noise was low enough as shown in the chart. (9 kHz-150 kHz: RBW = 200 Hz, 150 kHz-30 MHz: RBW = 9.1 kHz).

*4) The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to $45.5 - 51.5 = -6.0$ dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

The test results and limit are rounded off to two decimals place, so some differences might be observed.
The equipment and cables were not used for factor 0 dB of the data sheets.

Test data : APPENDIX

Test result : Pass

APPENDIX 1: Test data

99 % Occupied Bandwidth

Report No.	13828808H
Test place	Ise EMC Lab. No.6 Measurement Room
Date	June 13, 2021
Temperature / Humidity	25 deg. C / 55 % RH
Engineer	Akihiko Maeda
Mode	Tx

11a

Antenna	Tested Frequency [MHz]	99 % Occupied Bandwidth [kHz]
Antenna 2	5180	17041.9
	5220	17029.2
	5240	16972.2
	5745	16956.7
	5785	17059.4
	5825	16935.6

11n-20

Antenna	Tested Frequency [MHz]	99 % Occupied Bandwidth [kHz]
Antenna 2	5180	17961.0
	5220	18003.2
	5240	18029.3
	5745	18062.3
	5785	18014.3
	5825	18037.9

11ac-20

Antenna	Tested Frequency [MHz]	99 % Occupied Bandwidth [kHz]
Antenna 2	5180	17991.4
	5220	17947.1
	5240	17959.5
	5745	18055.6
	5785	18081.3
	5825	18060.9

99 % Occupied Bandwidth

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 13, 2021
Temperature / Humidity 25 deg. C / 55 % RH
Engineer Akihiko Maeda
Mode Tx

11n-40

Antenna	Tested Frequency [MHz]	99 % Occupied Bandwidth [kHz]
Antenna 2	5190	36740.7
	5230	36669.6
	5755	36800.2
	5795	36872.4

11ac-40

Antenna	Tested Frequency [MHz]	99 % Occupied Bandwidth [kHz]
Antenna 2	5190	36553.9
	5230	36626.0
	5755	36648.8
	5795	36689.8


11ac-80

Antenna	Tested Frequency [MHz]	99 % Occupied Bandwidth [kHz]
Antenna 2	5210	76663.1
	5775	76566.2

99 % Occupied Bandwidth

Report No.	13828808H
Test place	Ise EMC Lab. No.6 Measurement Room
Date	June 13, 2021
Temperature / Humidity	25 deg. C / 55 % RH
Engineer	Akihiko Maeda
Mode	Tx

11a

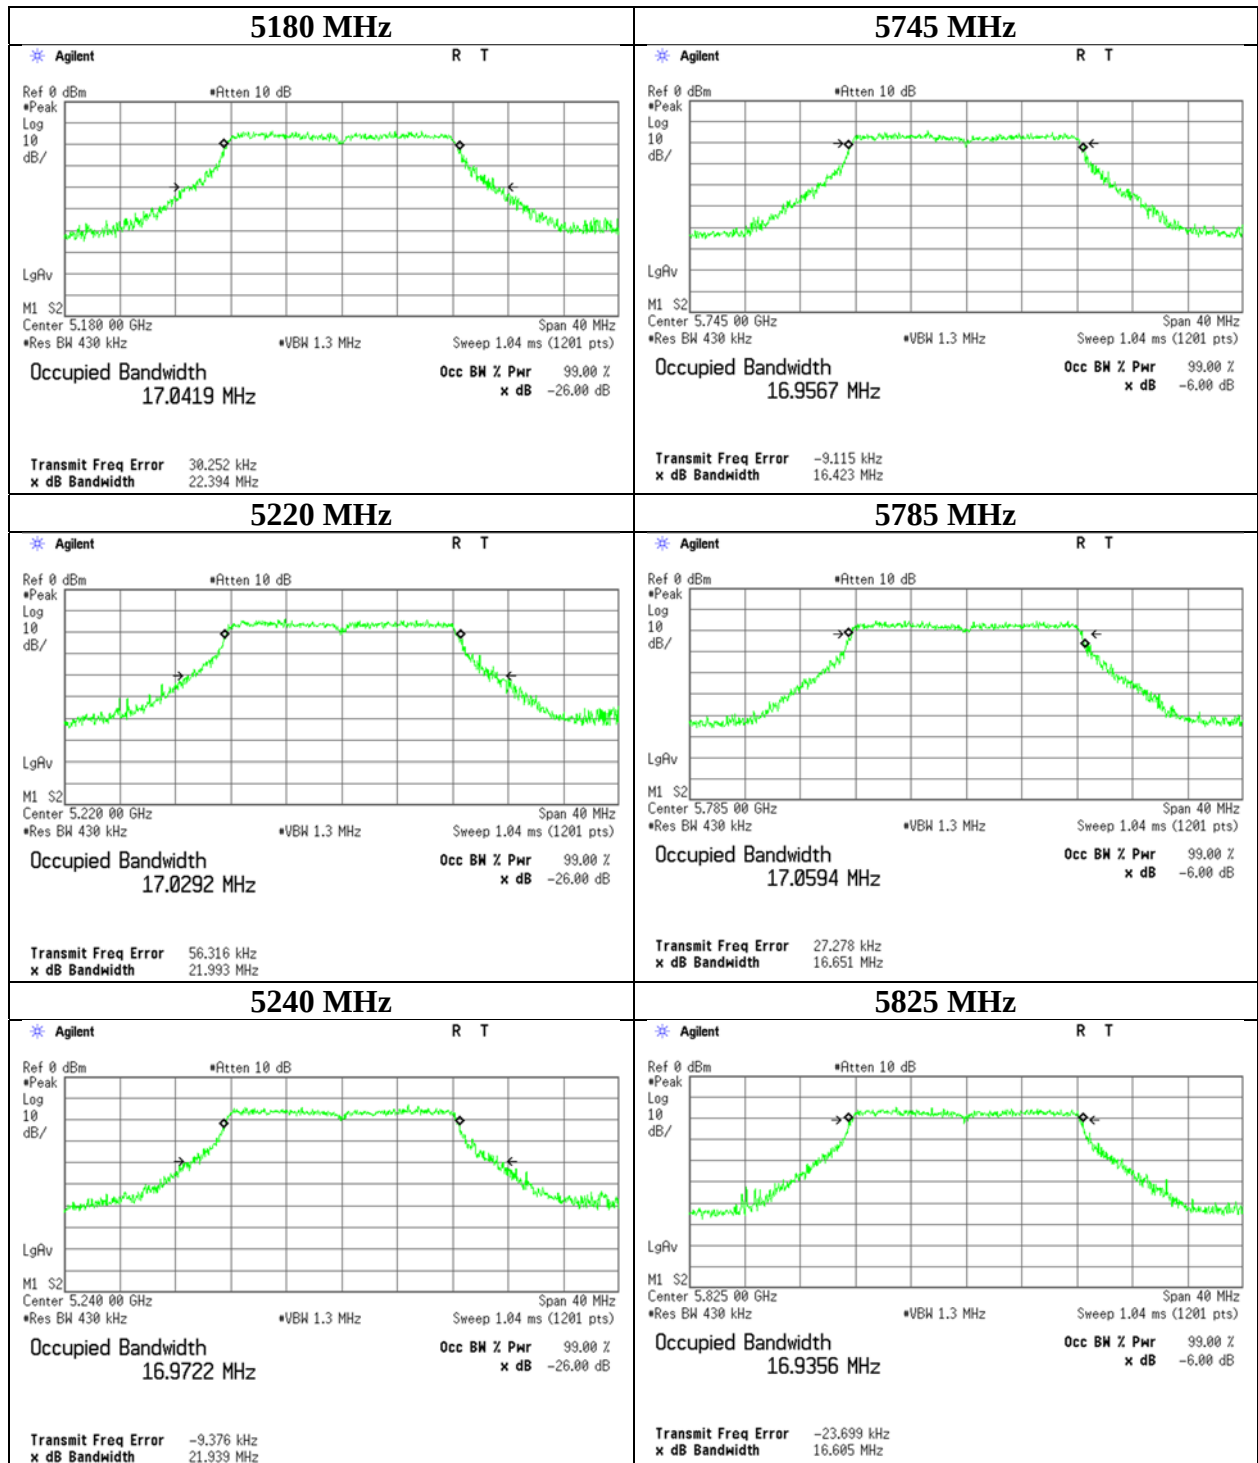

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

99 % Occupied Bandwidth

Report No.	13828808H
Test place	Ise EMC Lab. No.6 Measurement Room
Date	June 13, 2021
Temperature / Humidity	25 deg. C / 55 % RH
Engineer	Akihiko Maeda
Mode	Tx

11n-20

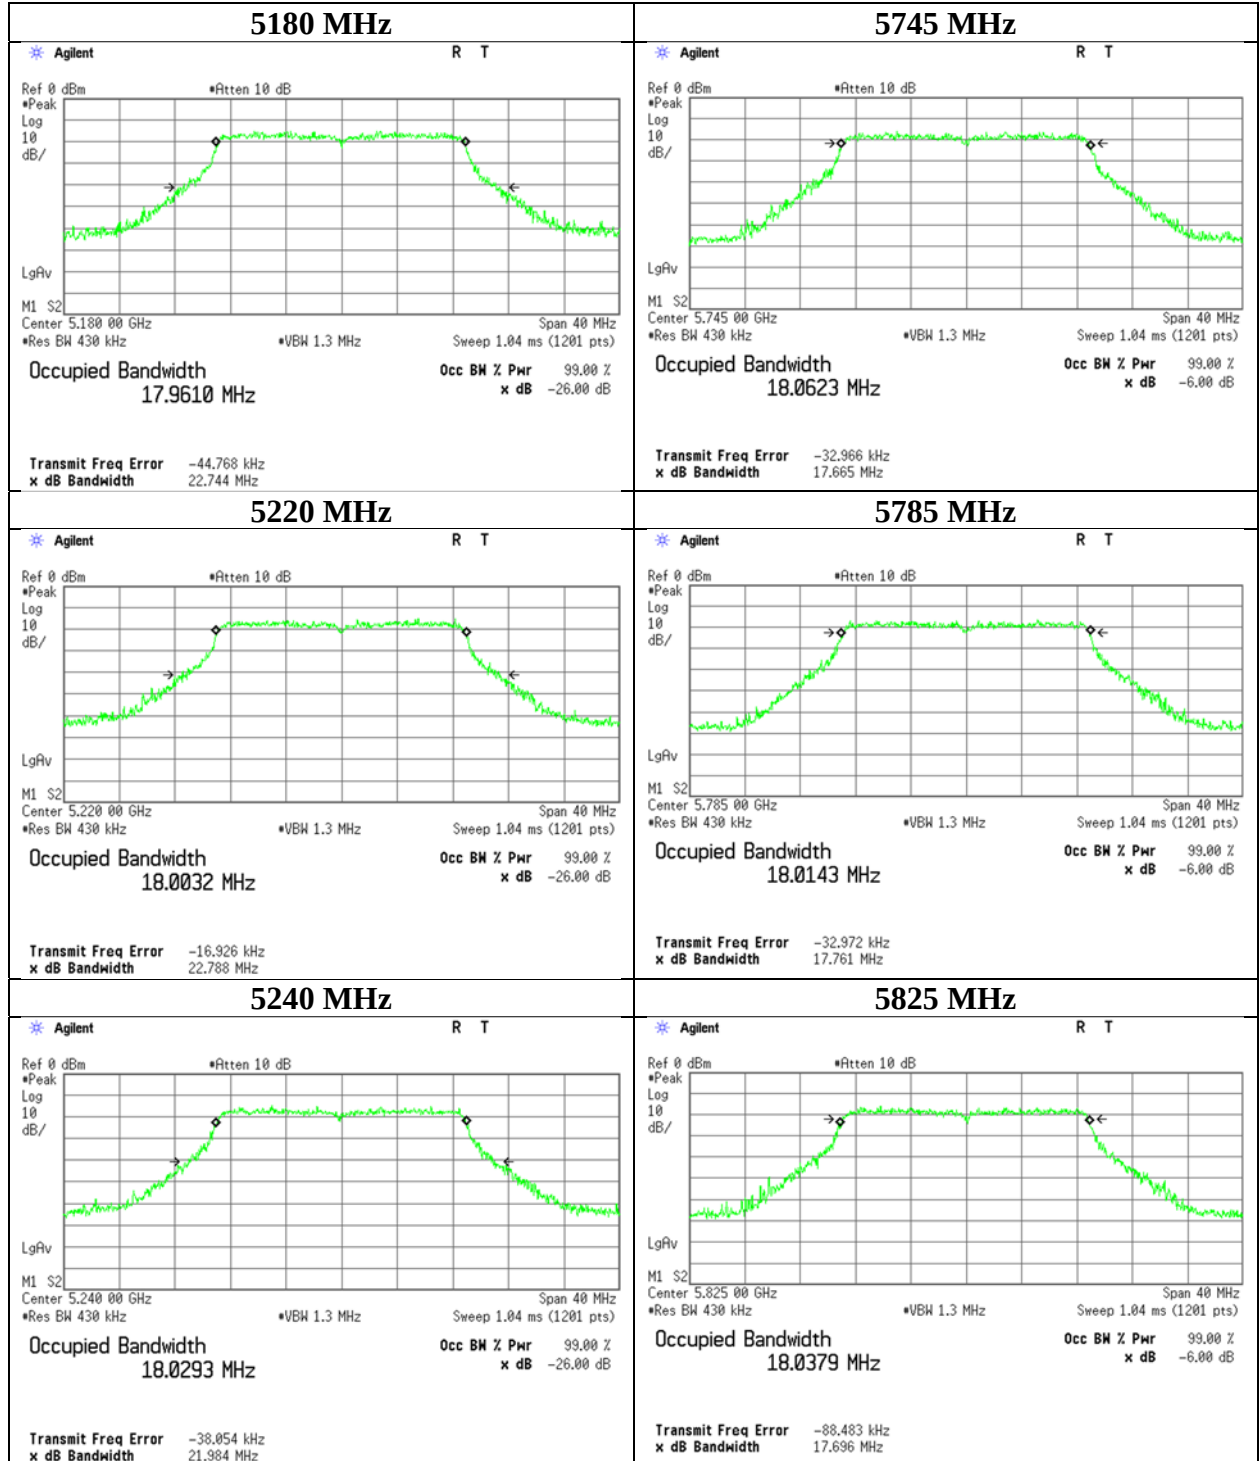

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

99 % Occupied Bandwidth

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 13, 2021
Temperature / Humidity 25 deg. C / 55 % RH
Engineer Akihiko Maeda
Mode Tx

11ac-20

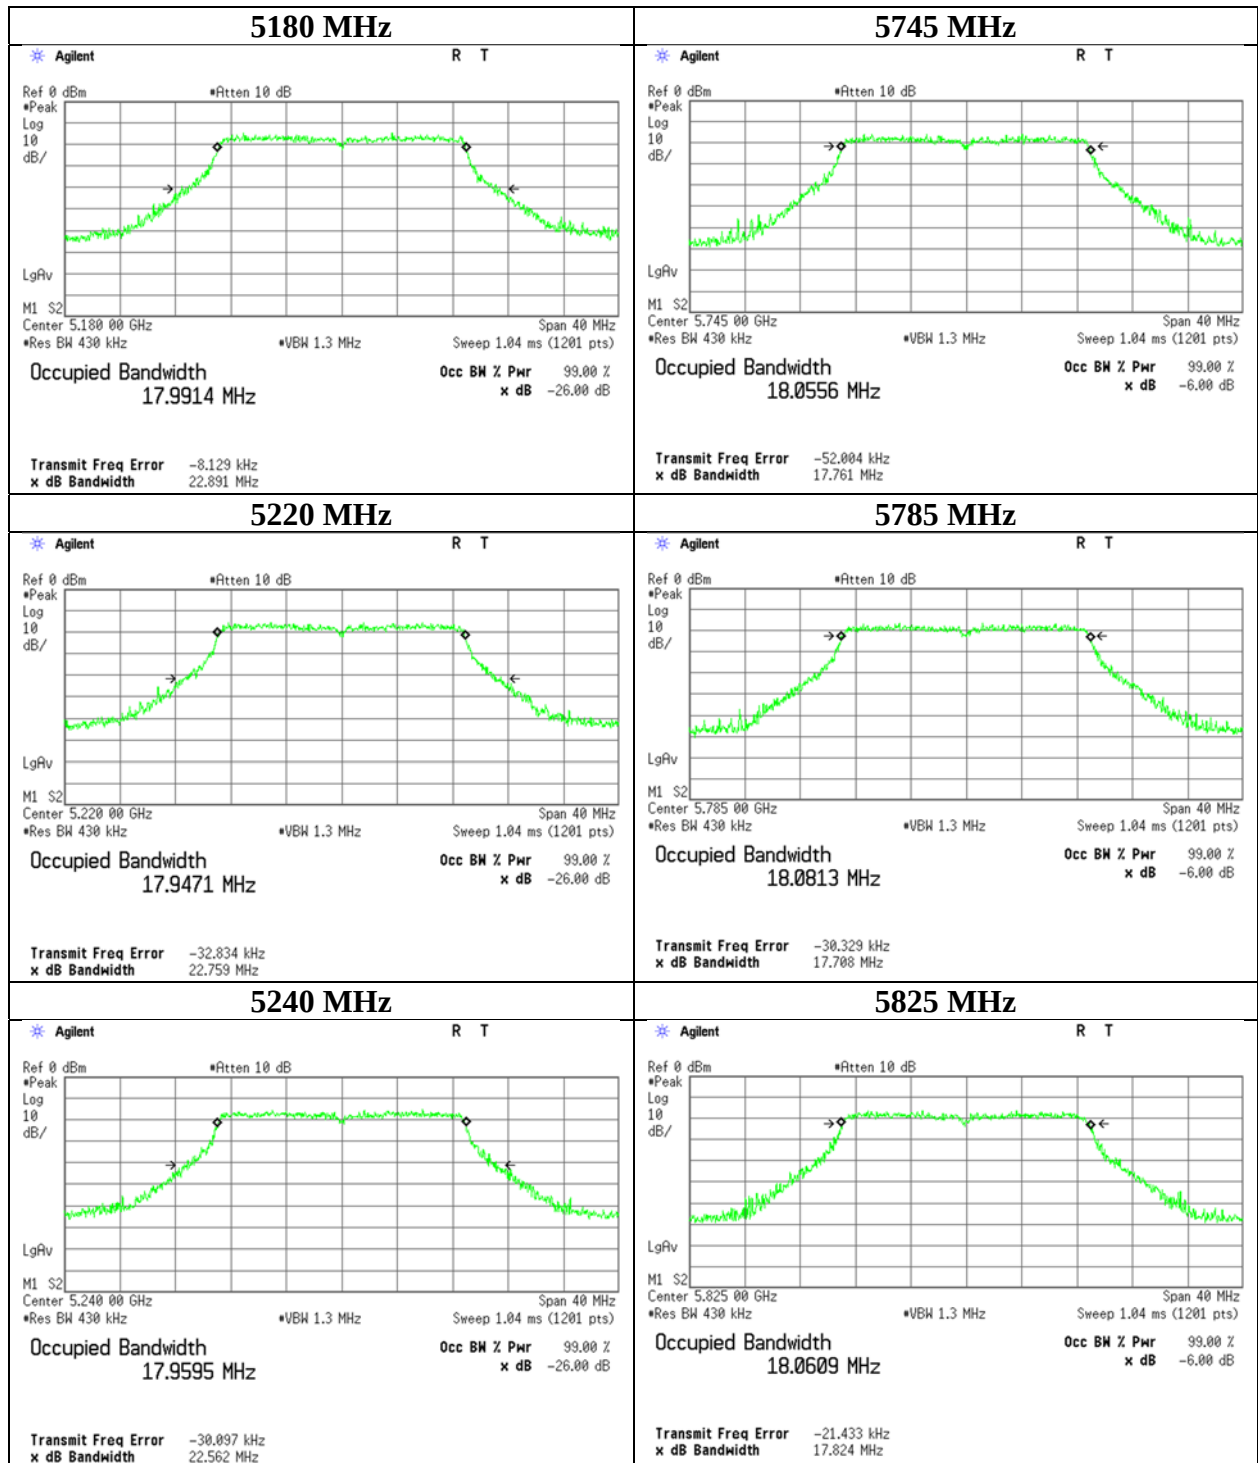

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

99 % Occupied Bandwidth

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 13, 2021
Temperature / Humidity 25 deg. C / 55 % RH
Engineer Akihiko Maeda
Mode Tx

11n-40

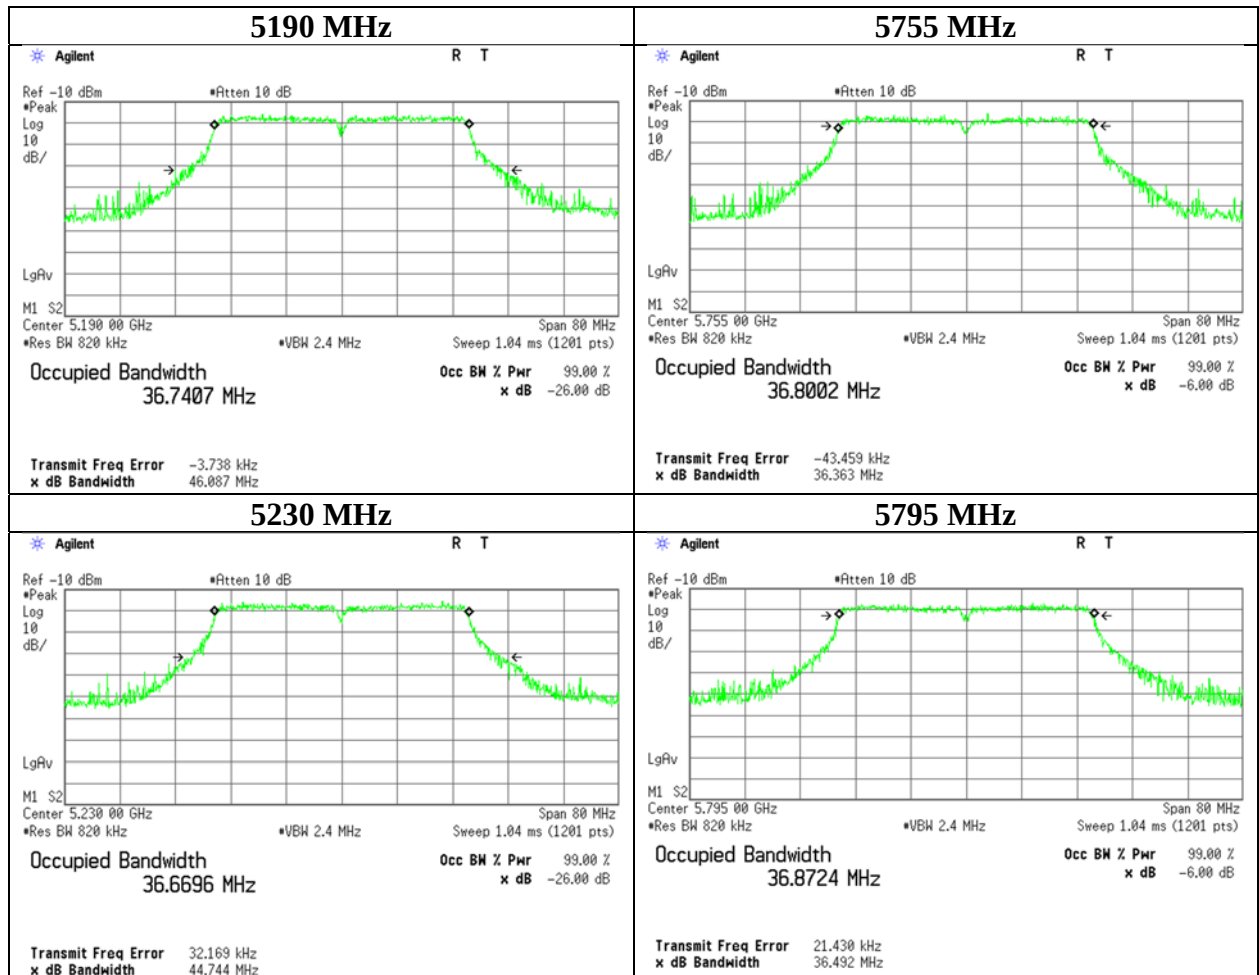

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

99 % Occupied Bandwidth

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 13, 2021
Temperature / Humidity 25 deg. C / 55 % RH
Engineer Akihiko Maeda
Mode Tx

11ac-40

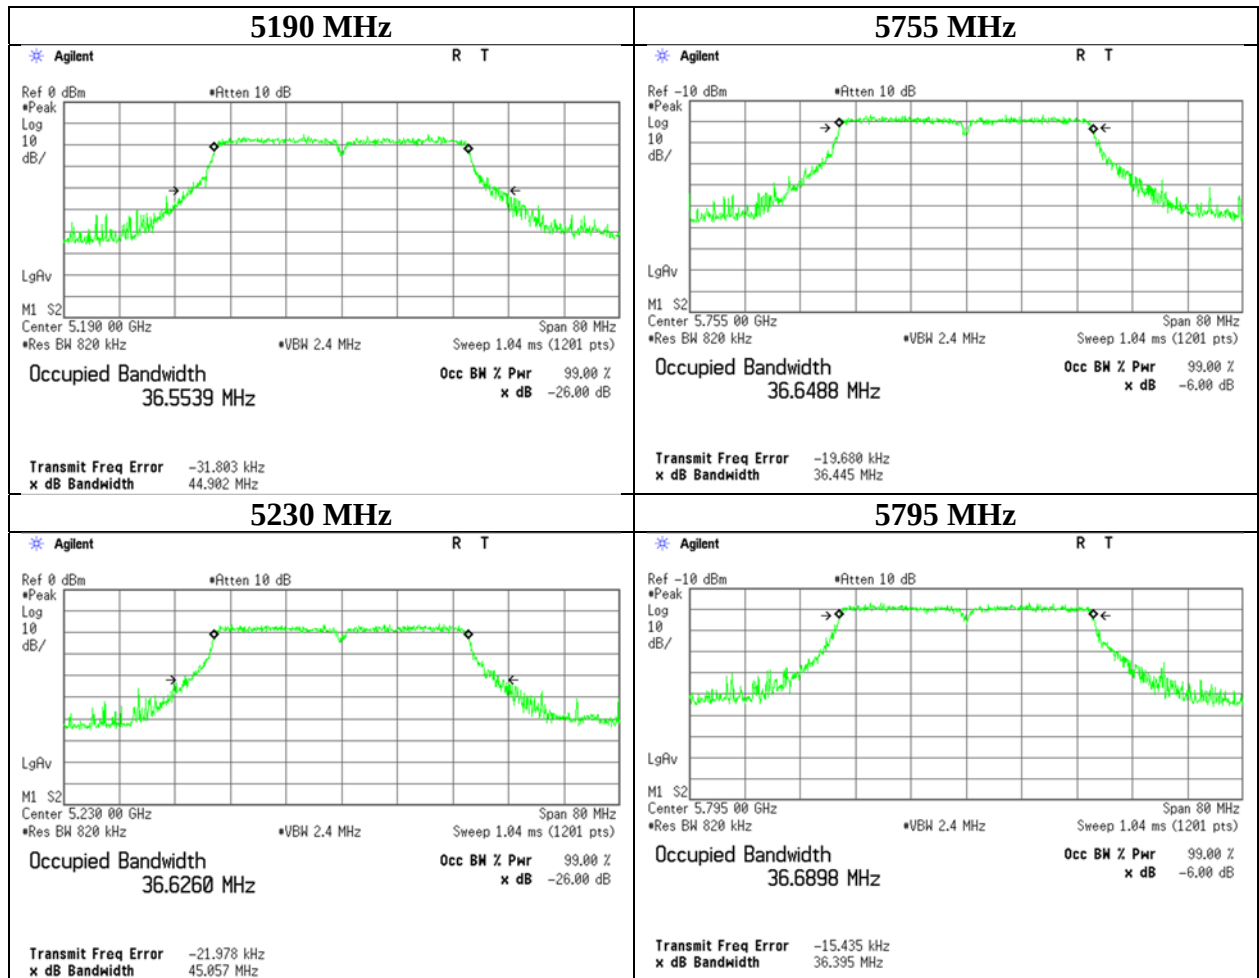

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

99 % Occupied Bandwidth

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 13, 2021
Temperature / Humidity 25 deg. C / 55 % RH
Engineer Akihiko Maeda
Mode Tx

11ac-80

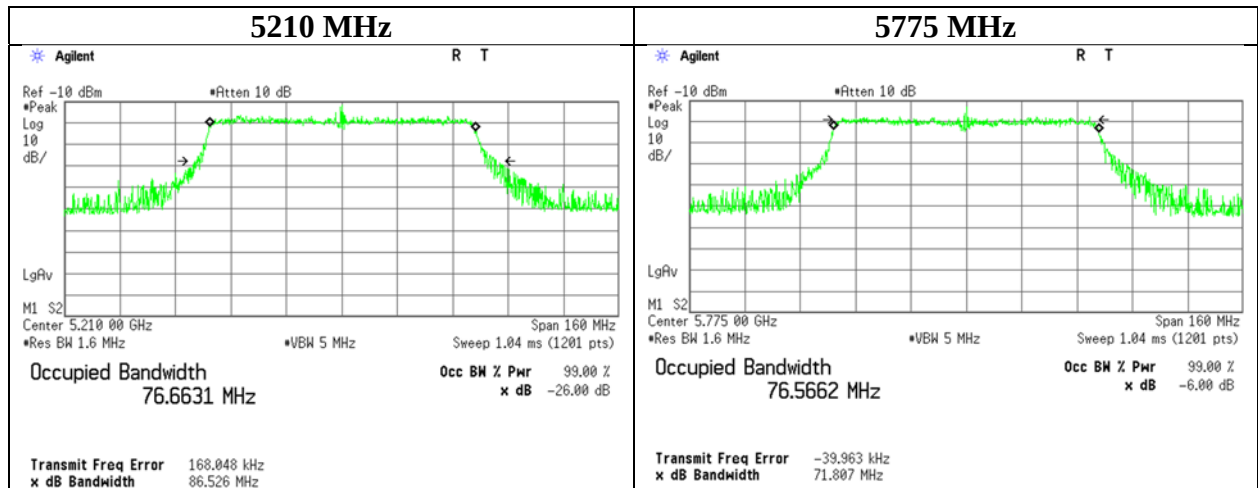

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

6 dB Bandwidth

Report No.	13828808H
Test place	Ise EMC Lab. No.6 Measurement Room
Date	June 13, 2021
Temperature / Humidity	25 deg. C / 55 % RH
Engineer	Akihiko Maeda
Mode	Tx

11a

Antenna	Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
Antenna 2	5745	16.451	> 0.500
	5785	16.473	> 0.500
	5825	16.467	> 0.500

11n-20

Antenna	Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
Antenna 2	5745	17.720	> 0.500
	5785	17.682	> 0.500
	5825	17.635	> 0.500

11ac-20

Antenna	Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
Antenna 2	5745	17.565	> 0.500
	5785	17.661	> 0.500
	5825	17.680	> 0.500

11n-40

Antenna	Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
Antenna 1	5755	36.445	> 0.500
	5795	36.292	> 0.500

11ac-40


Antenna	Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
Antenna 2	5755	36.329	> 0.500
	5795	36.125	> 0.500

11ac-80

Antenna	Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
Antenna 2	5775	75.980	> 0.500

6 dB Bandwidth

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 13, 2021
Temperature / Humidity 25 deg. C / 55 % RH
Engineer Akihiko Maeda
Mode Tx

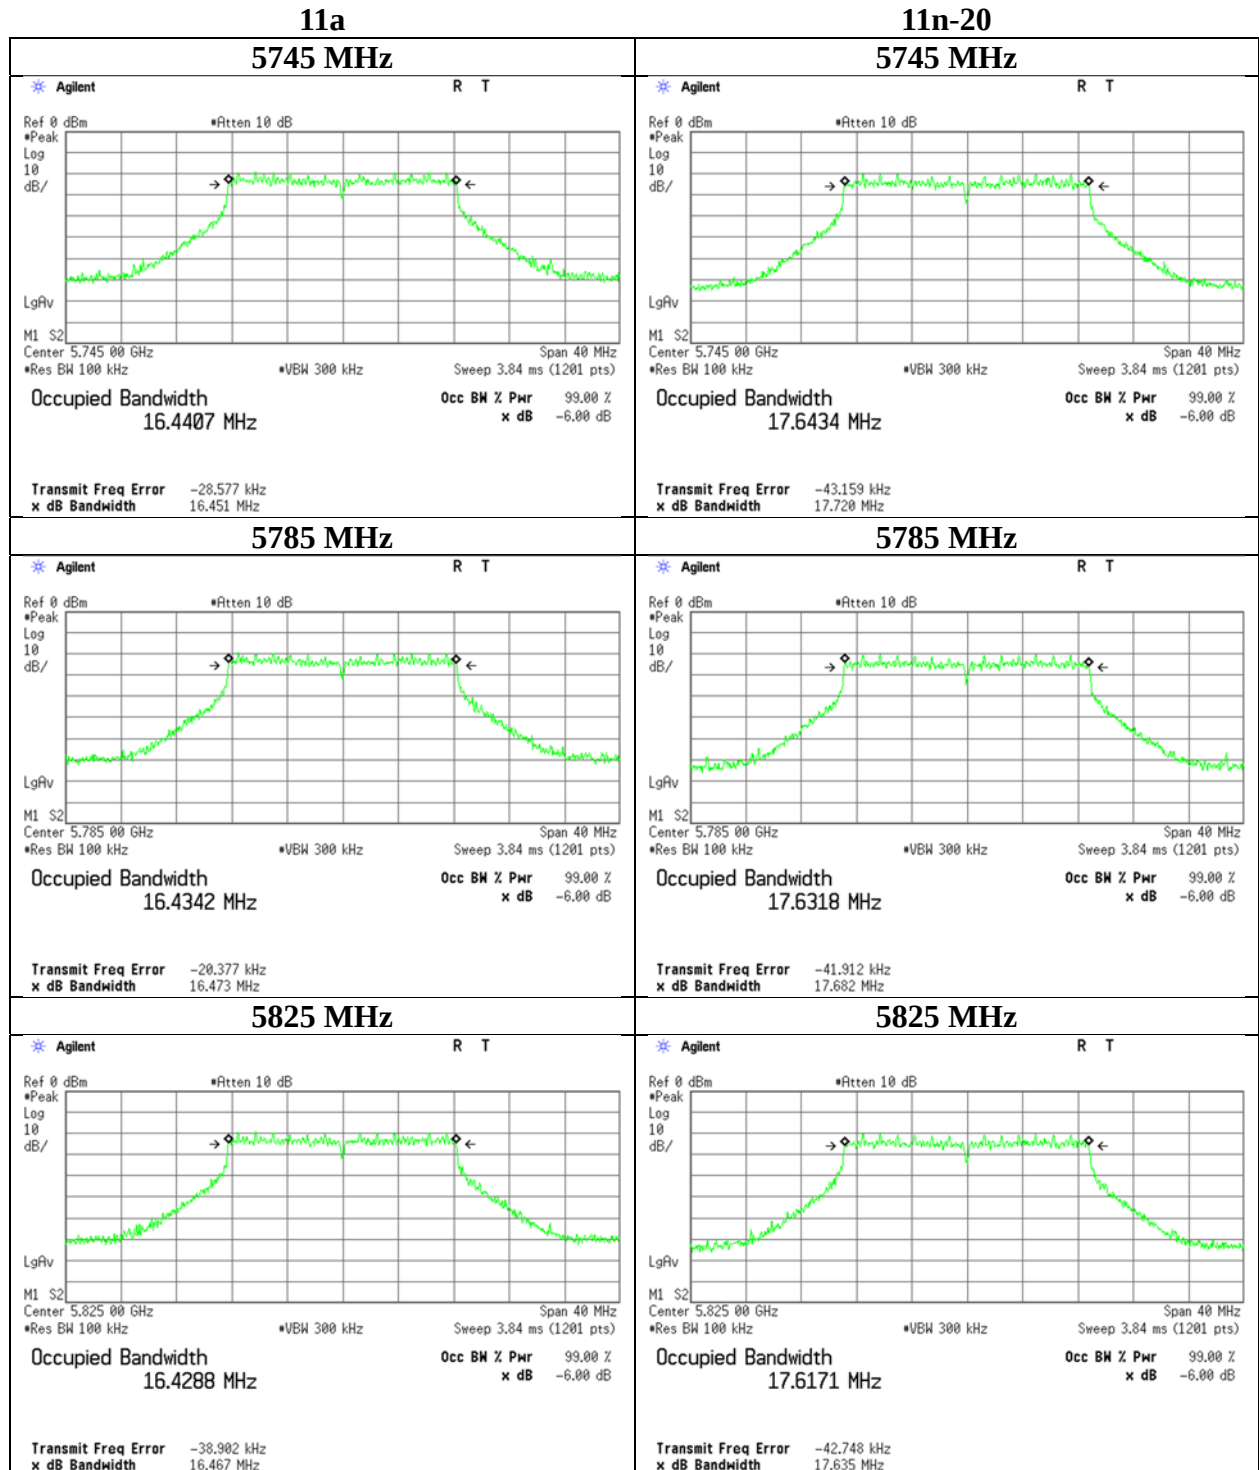

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

6 dB Bandwidth

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 13, 2021
Temperature / Humidity 25 deg. C / 55 % RH
Engineer Akihiko Maeda
Mode Tx

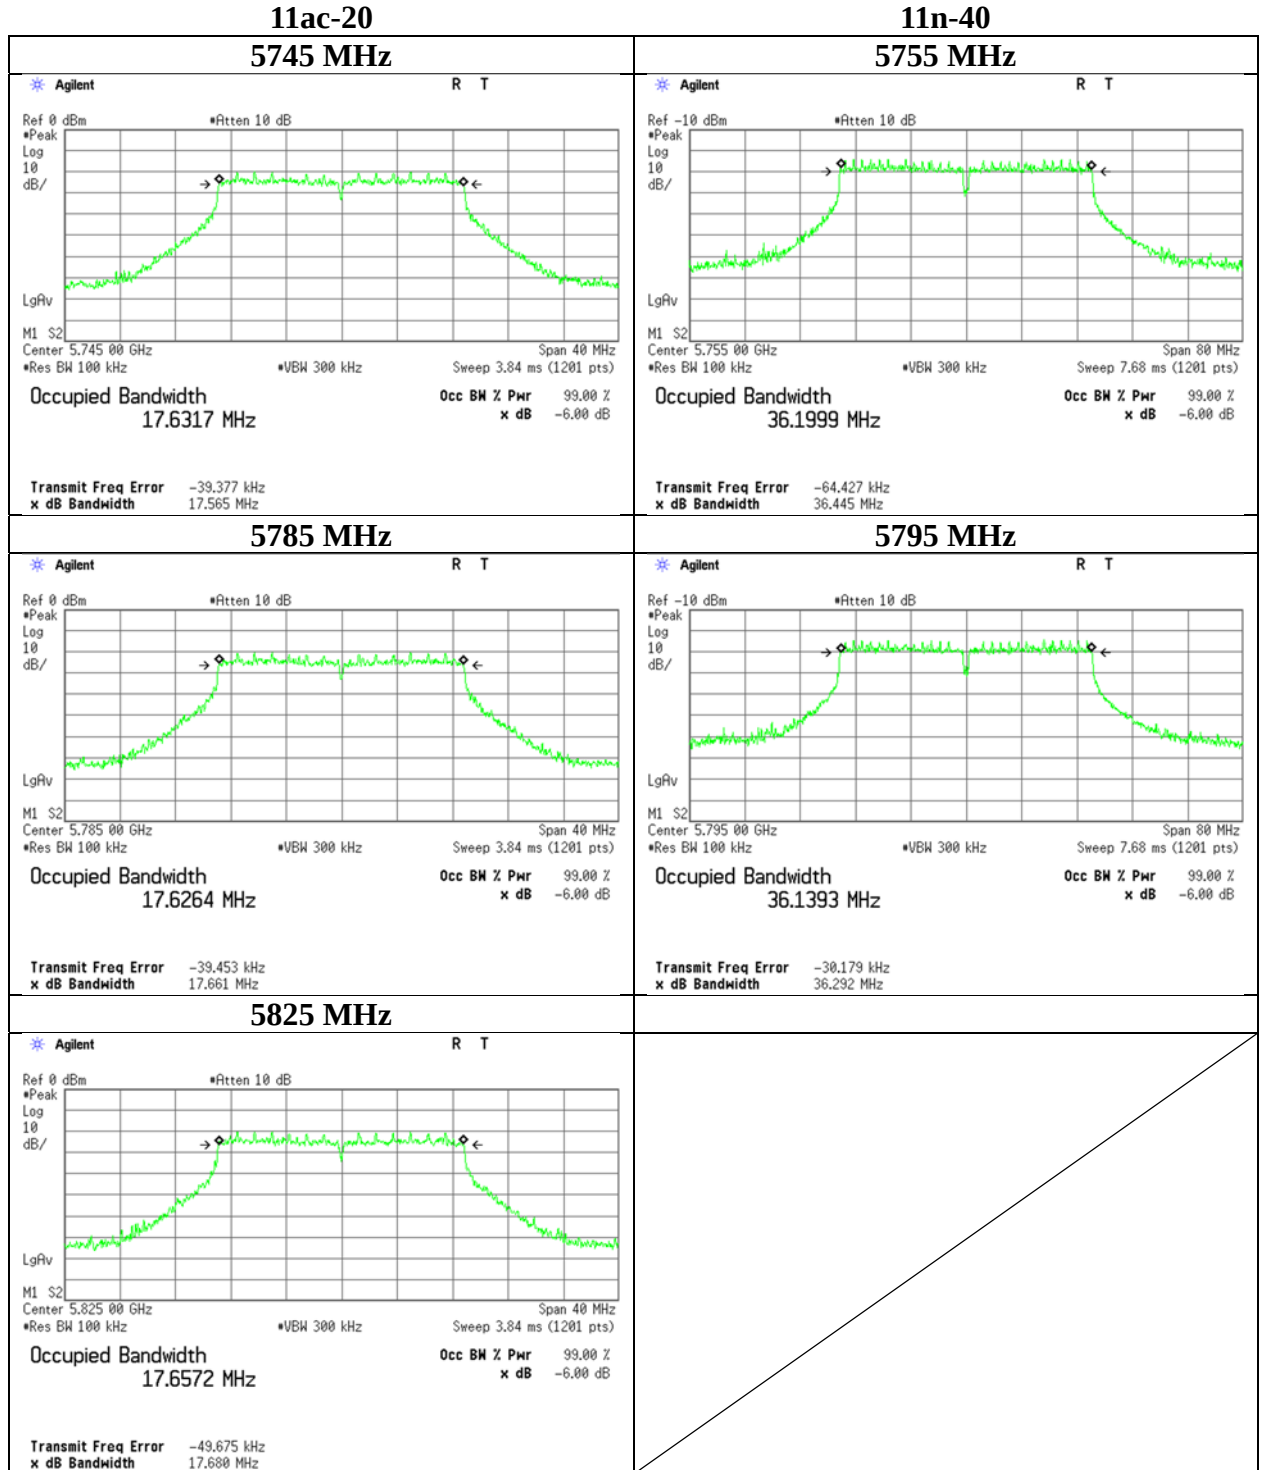

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

6 dB Bandwidth

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 13, 2021
Temperature / Humidity 25 deg. C / 55 % RH
Engineer Akihiko Maeda
Mode Tx

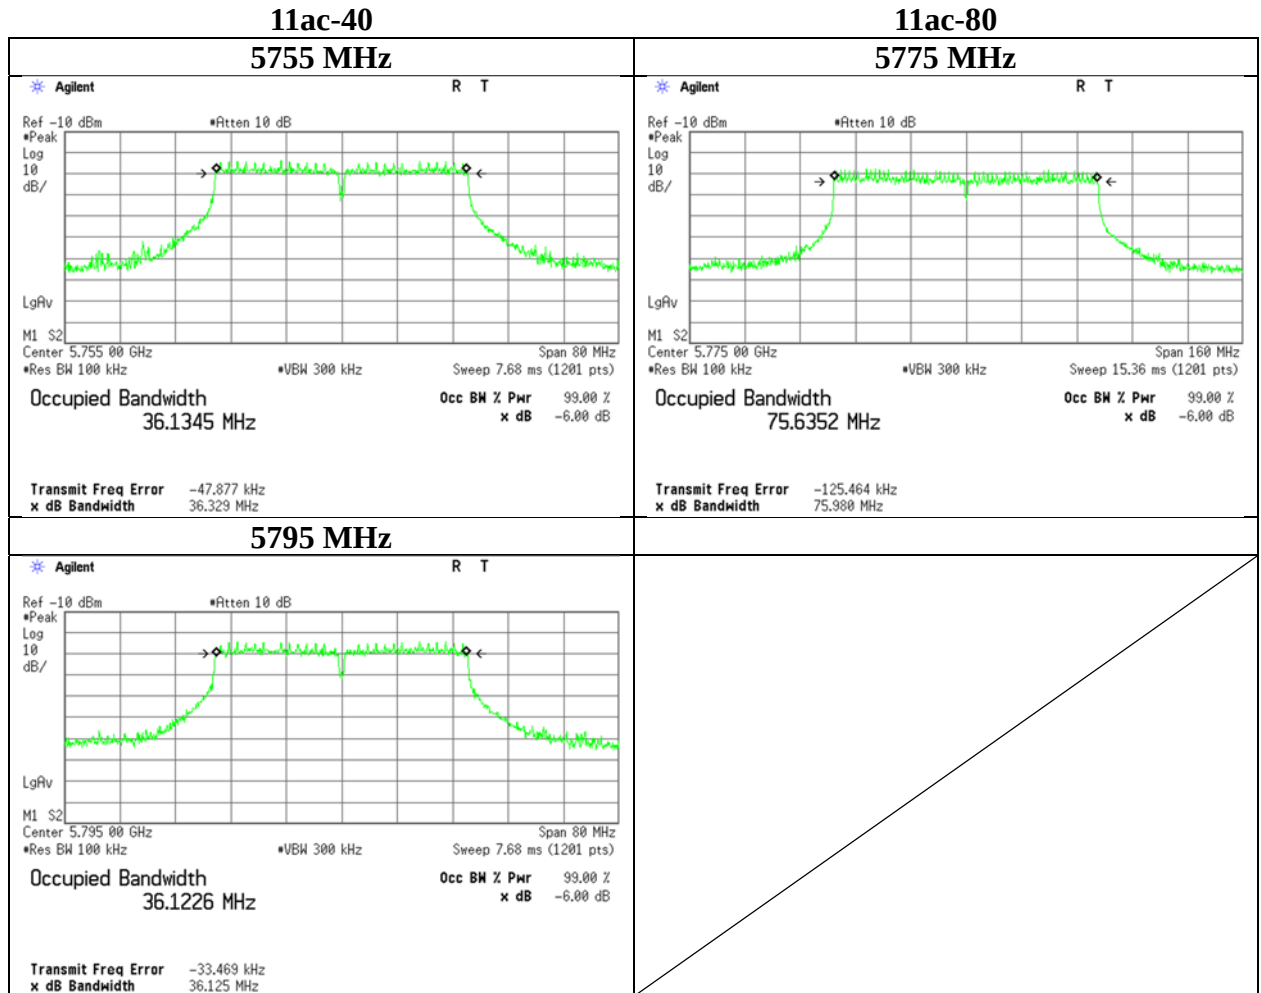

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Maximum Conducted Output Power

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 11, 2021 June 14, 2021
Temperature / Humidity 24 deg. C / 50 % RH 24 deg. C / 59 % RH
Engineer Yuichiro Yamazaki Takafumi Noguchi
Mode Tx 11a

11a Antenna1

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	99% OBW (B for IC) [MHz]	Conducted Power				e.i.r.p.			
							Result	Limit	Margin		Result	Limit	Margin	
							[dBm]	[mW]	[dBm]	[dB]	[dBm]	[mW]	[dBm]	[dB]
5180	-6.86	2.18	10.09	0.00	2.92	17.042	5.41	3.48	23.97	18.56	8.33	6.81	29.97	21.64
5220	-6.97	2.18	10.09	0.00	2.92	17.029	5.30	3.39	23.97	18.67	8.22	6.64	29.97	21.75
5240	-6.99	2.20	10.09	0.00	2.92	16.972	5.30	3.39	23.97	18.67	8.22	6.64	29.97	21.75
5745	-7.68	2.35	10.09	0.00	2.92	16.957	4.76	2.99	30.00	25.24	7.68	5.86	36.00	28.32
5785	-7.66	2.35	10.09	0.00	2.92	17.059	4.78	3.01	30.00	25.22	7.70	5.89	36.00	28.30
5825	-7.67	2.37	10.09	0.00	2.92	16.936	4.79	3.01	30.00	25.21	7.71	5.90	36.00	28.29

Sample Calculation:

Conducted Power Result = Reading + Cable Loss + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5725 MHz-5850 MHz) = 1W

11a Antenna2

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	99% OBW (B for IC) [MHz]	Conducted Power				e.i.r.p.			
							Result	Limit	Margin		Result	Limit	Margin	
							[dBm]	[mW]	[dBm]	[dB]	[dBm]	[mW]	[dBm]	[dB]
5180	-6.63	2.18	10.09	0.00	2.11	17.042	5.64	3.66	23.97	18.33	7.75	5.96	29.97	22.22
5220	-6.85	2.19	10.09	0.00	2.11	17.029	5.43	3.49	23.97	18.54	7.54	5.68	29.97	22.43
5240	-6.95	2.20	10.09	0.00	2.11	16.972	5.34	3.42	23.97	18.63	7.45	5.56	29.97	22.52
5745	-7.98	2.35	10.09	0.00	2.11	16.957	4.46	2.79	30.00	25.54	6.57	4.54	36.00	29.43
5785	-8.06	2.36	10.09	0.00	2.11	17.059	4.39	2.75	30.00	25.61	6.50	4.47	36.00	29.50
5825	-8.03	2.37	10.09	0.00	2.11	16.936	4.43	2.77	30.00	25.57	6.54	4.51	36.00	29.46

Sample Calculation:

Conducted Power Result = Reading + Cable Loss + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5725 MHz-5850 MHz) = 1W

5180 MHz

Mode	ANT	Rate Mbps	Reading (Burst Power) [dBm]	Antenna Gain [dBi]	e.i.r.p. [dBm]
11a	1	6	-6.86	2.92	-3.94
		9	-6.87	2.92	-3.95
		12	-6.83	2.92	-3.91
		18	-6.80	2.92	-3.88
		24	-6.97	2.92	-4.05
		36	-6.84	2.92	-3.92
		48	-6.81	2.92	-3.89
		54	-6.77	2.92	-3.85
	2	6	-6.79	2.11	-4.68
		9	-6.77	2.11	-4.66
		12	-6.74	2.11	-4.63
		18	-6.76	2.11	-4.65
		24	-6.73	2.11	-4.62
		36	-6.70	2.11	-4.59
		48	-6.64	2.11	-4.53
		54	-6.61	2.11	-4.50

Sample Calculation: e.i.r.p = Reading + Antenna Gain

Reading (Burst Power) is used the gating functionality of the power meter.

All comparison were carried out on same frequency and measurement factors.

Italic font is worst rate. (It was calculated respectively in the Burst Power and e.i.r.p.)

This test was performed using the gate function.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Maximum Conducted Output Power

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 11, 2021 June 14, 2021
Temperature / Humidity 24 deg. C / 50 % RH 24 deg. C / 59 % RH
Engineer Yuichiro Yamazaki Takafumi Noguchi
Mode Tx 11n-20

11n-20 Antenna1

Applied limit: 15.407, mobile and portable client device

Tested Frequency	Power Meter Reading	Cable Loss	Atten. Loss	Duty Factor	Antenna Gain	99% OBW (B for IC)	Conducted Power				e.i.r.p.			
							Result		Limit	Margin	Result		Limit	Margin
							[dBm]	[mW]	[dBm]	[dB]	[dBm]	[mW]	[dBm]	[dB]
[MHz]	[dBm]	[dB]	[dB]	[dB]	[dBi]	[MHz]	[dBm]	[mW]	[dBm]	[dB]	[dBm]	[mW]	[dBm]	[dB]
5180	-7.83	2.18	10.09	0.00	2.92	17.961	4.44	2.78	23.97	19.53	7.36	5.45	29.97	22.61
5220	-7.94	2.18	10.09	0.00	2.92	18.003	4.33	2.71	23.97	19.64	7.25	5.31	29.97	22.72
5240	-7.97	2.20	10.09	0.00	2.92	18.029	4.32	2.70	23.97	19.65	7.24	5.30	29.97	22.73
5745	-8.67	2.35	10.09	0.00	2.92	18.062	3.77	2.38	30.00	26.23	6.69	4.67	36.00	29.31
5785	-8.67	2.35	10.09	0.00	2.92	18.014	3.77	2.38	30.00	26.23	6.69	4.67	36.00	29.31
5825	-8.59	2.37	10.09	0.00	2.92	18.038	3.87	2.44	30.00	26.13	6.79	4.78	36.00	29.21

Sample Calculation:

Conducted Power Result = Reading + Cable Loss + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5725 MHz-5850 MHz) = 1W

11n-20 Antenna2

Applied limit: 15.407, mobile and portable client device

Tested Frequency	Power Meter Reading	Cable Loss	Atten. Loss	Duty Factor	Antenna Gain	99% OBW (B for IC)	Conducted Power				e.i.r.p.			
							Result		Limit	Margin	Result		Limit	Margin
							[dBm]	[mW]	[dBm]	[dB]	[dBm]	[mW]	[dBm]	[dB]
[MHz]	[dBm]	[dB]	[dB]	[dB]	[dBi]	[MHz]	[dBm]	[mW]	[dBm]	[dB]	[dBm]	[mW]	[dBm]	[dB]
5180	-7.63	2.18	10.09	0.00	2.11	17.961	4.64	2.91	23.97	19.33	6.75	4.73	29.97	23.22
5220	-7.90	2.19	10.09	0.00	2.11	18.003	4.38	2.74	23.97	19.59	6.49	4.46	29.97	23.48
5240	-7.99	2.20	10.09	0.00	2.11	18.029	4.30	2.69	23.97	19.67	6.41	4.38	29.97	23.56
5745	-9.01	2.35	10.09	0.00	2.11	18.062	3.43	2.20	30.00	26.57	5.54	3.58	36.00	30.46
5785	-9.12	2.36	10.09	0.00	2.11	18.014	3.33	2.15	30.00	26.67	5.44	3.50	36.00	30.56
5825	-9.04	2.37	10.09	0.00	2.11	18.038	3.42	2.20	30.00	26.58	5.53	3.57	36.00	30.47

Sample Calculation:

Conducted Power Result = Reading + Cable Loss + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5725 MHz-5850 MHz) = 1W

5180 MHz

Mode	ANT	MCS Number	Reading (Burst Power)		Antenna Gain [dBi]	e.i.r.p	
			Short GI [dBm]	Long GI [dBm]		Short GI [dBm]	Long GI [dBm]
11n-20	1	0	-8.12		2.92	-5.20	
		1	-8.08		2.92	-5.16	
		2	-8.03		2.92	-5.11	
		3	-7.94		2.92	-5.02	
		4	-7.91		2.92	-4.99	
		5	-7.83		2.92	-4.91	
		6	-7.85		2.92	-4.93	
	2	7	-7.82	-7.98	2.92	-4.90	-5.06
		0	-7.93		2.11	-5.82	
		1	-7.87		2.11	-5.76	
		2	-7.83		2.11	-5.72	
		3	-7.71		2.11	-5.60	
		4	-7.63		2.11	-5.52	
		5	-7.59		2.11	-5.48	
		6	-7.58		2.11	-5.47	
		7	-7.55	-7.57	2.11	-5.44	-5.46

Sample Calculation: e.i.r.p = Reading + Antenna Gain

Reading (Burst Power) is used the gating functionality of the power meter.

All comparison were carried out on same frequency and measurement factors.

Italic font is worst rate. (It was calculated respectively in the Burst Power and e.i.r.p.)

This test was performed using the gate function.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Maximum Conducted Output Power

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 11, 2021 June 14, 2021
Temperature / Humidity 24 deg. C / 50 % RH 24 deg. C / 59 % RH
Engineer Yuichiro Yamazaki Takafumi Noguchi
Mode Tx 11ac-20

11ac-20 Antenna1

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	99% OBW (B for 1C) [MHz]	Conducted Power				e.i.r.p.			
							Result [dBm]	Result [mW]	Limit [dBm]	Margin [dB]	Result [dBm]	Result [mW]	Limit [dBm]	Margin [dB]
5180	-7.82	2.18	10.09	0.00	2.92	17.991	4.45	2.79	23.97	19.52	7.37	5.46	29.97	22.60
5220	-7.85	2.18	10.09	0.00	2.92	17.947	4.42	2.77	23.97	19.55	7.34	5.42	29.97	22.63
5240	-7.92	2.20	10.09	0.00	2.92	17.960	4.37	2.74	23.97	19.60	7.29	5.36	29.97	22.68
5745	-8.65	2.35	10.09	0.00	2.92	18.056	3.79	2.39	30.00	26.21	6.71	4.69	36.00	29.29
5785	-8.61	2.35	10.09	0.00	2.92	18.081	3.83	2.42	30.00	26.17	6.75	4.73	36.00	29.25
5825	-8.56	2.37	10.09	0.00	2.92	18.061	3.90	2.45	30.00	26.10	6.82	4.81	36.00	29.18

Sample Calculation:

Conducted Power Result = Reading + Cable Loss + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5725 MHz-5850 MHz) = 1W

11ac-20 Antenna2

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	99% OBW (B for 1C) [MHz]	Conducted Power				e.i.r.p.			
							Result [dBm]	Result [mW]	Limit [dBm]	Margin [dB]	Result [dBm]	Result [mW]	Limit [dBm]	Margin [dB]
5180	-7.61	2.18	10.09	0.00	2.11	17.991	4.66	2.92	23.97	19.31	6.77	4.75	29.97	23.20
5220	-7.80	2.19	10.09	0.00	2.11	17.947	4.48	2.81	23.97	19.49	6.59	4.56	29.97	23.38
5240	-7.92	2.20	10.09	0.00	2.11	17.960	4.37	2.74	23.97	19.60	6.48	4.45	29.97	23.49
5745	-8.97	2.35	10.09	0.00	2.11	18.056	3.47	2.22	30.00	26.53	5.58	3.61	36.00	30.42
5785	-9.08	2.36	10.09	0.00	2.11	18.081	3.37	2.17	30.00	26.63	5.48	3.53	36.00	30.52
5825	-9.01	2.37	10.09	0.00	2.11	18.061	3.45	2.21	30.00	26.55	5.56	3.60	36.00	30.44

Sample Calculation:

Conducted Power Result = Reading + Cable Loss + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5725 MHz-5850 MHz) = 1W

5180 MHz

Mode	ANT	MCS Number	Reading (Burst Power)		Antenna Gain [dBi]	e.i.r.p	
			Short GI [dBm]	Long GI [dBm]		Short GI [dBm]	Long GI [dBm]
11ac-20	1	0	-8.31		2.92	-5.39	
		1	-8.25		2.92	-5.33	
		2	-8.21		2.92	-5.29	
		3	-8.02		2.92	-5.10	
		4	-8.00		2.92	-5.08	
		5	-7.97		2.92	-5.05	
		6	-7.99		2.92	-5.07	
		7	-7.81	-7.92	2.92	-4.89	-5.00
		8	-9.18		2.92	-6.26	
	2	0	-7.95		2.11	-5.84	
		1	-7.89		2.11	-5.78	
		2	-7.85		2.11	-5.74	
		3	-7.73		2.11	-5.62	
		4	-7.65		2.11	-5.54	
		5	-7.64		2.11	-5.53	
		6	-7.62		2.11	-5.51	
		7	-7.60	-7.63	2.11	-5.49	-5.52
		8	-8.70		2.11	-6.59	

Sample Calculation: e.i.r.p = Reading + Antenna Gain

Reading (Burst Power) is used the gating functionality of the power meter.

All comparison were carried out on same frequency and measurement factors.

Italic font is worst rate. (It was calculated respectively in the Burst Power and e.i.r.p.)

This test was performed using the gate function.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Maximum Conducted Output Power

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 11, 2021 June 14, 2021
Temperature / Humidity 24 deg. C / 50 % RH 24 deg. C / 59 % RH
Engineer Yuichiro Yamazaki Takafumi Noguchi
Mode Tx 11n-40

11n-40 Antenna1

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	99% OBW (B for IC) [MHz]	Conducted Power				e.i.r.p.			
							Result	Limit	Margin		Result	Limit	Margin	
							[dBm]	[mW]	[dBm]	[dB]	[dBm]	[mW]	[dBm]	[dB]
5190	-8.73	2.18	10.09	0.00	2.92	36.741	3.54	2.26	23.97	20.43	6.46	4.43	29.97	23.51
5230	-8.90	2.20	10.09	0.00	2.92	36.670	3.39	2.18	23.97	20.58	6.31	4.28	29.97	23.66
5755	-9.52	2.35	10.09	0.00	2.92	36.800	2.92	1.96	30.00	27.08	5.84	3.84	36.00	30.16
5795	-9.53	2.35	10.09	0.00	2.92	36.872	2.91	1.95	30.00	27.09	5.83	3.83	36.00	30.17

Sample Calculation:

Conducted Power Result = Reading + Cable Loss + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5725 MHz-5850 MHz) = 1W

11n-40 Antenna2

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	99% OBW (B for IC) [MHz]	Conducted Power				e.i.r.p.			
							Result	Limit	Margin		Result	Limit	Margin	
							[dBm]	[mW]	[dBm]	[dB]	[dBm]	[mW]	[dBm]	[dB]
5190	-8.67	2.18	10.09	0.00	2.11	36.741	3.60	2.29	23.97	20.37	5.71	3.72	29.97	24.26
5230	-8.80	2.20	10.09	0.00	2.11	36.670	3.49	2.23	23.97	20.48	5.60	3.63	29.97	24.37
5755	-9.99	2.35	10.09	0.00	2.11	36.800	2.45	1.76	30.00	27.55	4.56	2.86	36.00	31.44
5795	-10.01	2.36	10.09	0.00	2.11	36.872	2.44	1.75	30.00	27.56	4.55	2.85	36.00	31.45

Sample Calculation:

Conducted Power Result = Reading + Cable Loss + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5725 MHz-5850 MHz) = 1W

5190 MHz

Mode	ANT	MCS Number	Reading (Burst Power)		Antenna Gain [dBi]	e.i.r.p	
			Short GI [dBm]	Long GI [dBm]		Short GI [dBm]	Long GI [dBm]
11n-40	1	0	-9.16		2.92	-6.24	
		1	-9.05		2.92	-6.13	
		2	-8.99		2.92	-6.07	
		3	-9.09		2.92	-6.17	
		4	-9.03		2.92	-6.11	
		5	-8.99		2.92	-6.07	
		6	-8.97		2.92	-6.05	
		7	-8.95	-8.97	2.92	-6.03	-6.05
	2	0	-8.80		2.11	-6.69	
		1	-8.81		2.11	-6.70	
		2	-8.76		2.11	-6.65	
		3	-8.87		2.11	-6.76	
		4	-8.76		2.11	-6.65	
		5	-8.73		2.11	-6.62	
		6	-8.73		2.11	-6.62	
		7	-8.70	-8.72	2.11	-6.59	-6.61

Sample Calculation: e.i.r.p = Reading + Antenna Gain

Reading (Burst Power) is used the gating functionality of the power meter.

All comparison were carried out on same frequency and measurement factors.

Italic font is worst rate. (It was calculated respectively in the Burst Power and e.i.r.p.)

This test was performed using the gate function.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Maximum Conducted Output Power

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 11, 2021 June 14, 2021
Temperature / Humidity 24 deg. C / 50 % RH 24 deg. C / 59 % RH
Engineer Yuichiro Yamazaki Takafumi Noguchi
Mode Tx 11ac-40

11ac-40 Antenna1

Applied limit: 15.407, mobile and portable client device

Tested Frequency	Power Meter Reading	Cable Loss	Atten. Loss	Duty Factor	Antenna Gain	99% OBW (B for IC)	Conducted Power				e.i.r.p.			
							Result		Limit	Margin	Result		Limit	Margin
							[dBm]	[mW]	[dBm]	[dB]	[dBm]	[mW]	[dBm]	[dB]
[MHz]	[dBm]	[dB]	[dB]	[dB]	[dBi]	[MHz]	[dBm]	[mW]	[dBm]	[dB]	[dBm]	[mW]	[dBm]	[dB]
5190	-8.72	2.18	10.09	0.00	2.92	36.554	3.55	2.26	23.97	20.42	6.47	4.44	29.97	23.50
5230	-8.85	2.20	10.09	0.00	2.92	36.626	3.44	2.21	23.97	20.53	6.36	4.33	29.97	23.61
5755	-9.49	2.35	10.09	0.00	2.92	36.649	2.95	1.97	30.00	27.05	5.87	3.86	36.00	30.13
5795	-9.43	2.35	10.09	0.00	2.92	36.690	3.01	2.00	30.00	26.99	5.93	3.92	36.00	30.07

Sample Calculation:

Conducted Power Result = Reading + Cable Loss + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5725 MHz-5850 MHz) = 1W

11ac-40 Antenna2

Applied limit: 15.407, mobile and portable client device

Tested Frequency	Power Meter Reading	Cable Loss	Atten. Loss	Duty Factor	Antenna Gain	99% OBW (B for IC)	Conducted Power				e.i.r.p.			
							Result		Limit	Margin	Result		Limit	Margin
							[dBm]	[mW]	[dBm]	[dB]	[dBm]	[mW]	[dBm]	[dB]
[MHz]	[dBm]	[dB]	[dB]	[dB]	[dBi]	[MHz]	[dBm]	[mW]	[dBm]	[dB]	[dBm]	[mW]	[dBm]	[dB]
5190	-8.65	2.18	10.09	0.00	2.11	36.554	3.62	2.30	23.97	20.35	5.73	3.74	29.97	24.24
5230	-8.76	2.20	10.09	0.00	2.11	36.626	3.53	2.25	23.97	20.44	5.64	3.66	29.97	24.33
5755	-9.96	2.35	10.09	0.00	2.11	36.649	2.48	1.77	30.00	27.52	4.59	2.88	36.00	31.41
5795	-10.00	2.36	10.09	0.00	2.11	36.690	2.45	1.76	30.00	27.55	4.56	2.86	36.00	31.44

Sample Calculation:

Conducted Power Result = Reading + Cable Loss + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5725 MHz-5850 MHz) = 1W

5190 MHz

Mode	ANT	MCS Number	Reading (Burst Power)		Antenna Gain [dBi]	e.i.r.p	
			Short GI [dBm]	Long GI [dBm]		Short GI [dBm]	Long GI [dBm]
11ac-40	1	0	-9.01		2.92	-6.09	
		1	-9.01		2.92	-6.09	
		2	-8.96		2.92	-6.04	
		3	-9.00		2.92	-6.08	
		4	-9.01		2.92	-6.09	
		5	-8.97		2.92	-6.05	
		6	-8.90		2.92	-5.98	
		7	-8.88	-8.94	2.92	-5.96	-6.02
		8	-11.20		2.92	-8.28	
		9	-11.21		2.92	-8.29	
	2	0	-8.81		2.11	-6.70	
		1	-8.75		2.11	-6.64	
		2	-8.73		2.11	-6.62	
		3	-8.78		2.11	-6.67	
		4	-8.74		2.11	-6.63	
		5	-8.67		2.11	-6.56	
		6	-8.70		2.11	-6.59	
		7	-8.65	-8.66	2.11	-6.54	-6.55
		8	-10.36		2.11	-8.25	
		9	-10.52		2.11	-8.41	

Sample Calculation: e.i.r.p = Reading + Antenna Gain

Reading (Burst Power) is used the gating functionality of the power meter.

All comparison were carried out on same frequency and measurement factors.

Italic font is worst rate. (It was calculated respectively in the Burst Power and e.i.r.p.)

This test was performed using the gate function.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Maximum Conducted Output Power

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 11, 2021 June 14, 2021
Temperature / Humidity 24 deg. C / 50 % RH 24 deg. C / 59 % RH
Engineer Yuichiro Yamazaki Takafumi Noguchi
Mode Tx 11ac-80

11ac-80 Antenna1

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	99% OBW (B for IC) [MHz]	Conducted Power				e.i.r.p.			
							Result	Limit	Margin		Result	Limit	Margin	
5210	-9.83	2.18	10.09	0.00	2.92	76.663	2.44	1.75	23.97	21.53	5.36	3.44	29.97	24.61
5775	-10.56	2.35	10.09	0.00	2.92	76.566	1.88	1.54	30.00	28.12	4.80	3.02	36.00	31.20

Sample Calculation:

Conducted Power Result = Reading + Cable Loss + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5725 MHz-5850 MHz) = 1W

11ac-80 Antenna2

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	99% OBW (B for IC) [MHz]	Conducted Power				e.i.r.p.			
							Result	Limit	Margin		Result	Limit	Margin	
5210	-9.71	2.19	10.09	0.00	2.11	76.663	2.57	1.81	23.97	21.40	4.68	2.94	29.97	25.29
5775	-10.60	2.35	10.09	0.00	2.11	76.566	1.84	1.53	30.00	28.16	3.95	2.48	36.00	32.05

Sample Calculation:

Conducted Power Result = Reading + Cable Loss + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5725 MHz-5850 MHz) = 1W

5210 MHz

Mode	ANT	MCS Number	Reading (Burst Power)		Antenna Gain [dBi]	e.i.r.p.	
			Short GI [dBm]	Long GI [dBm]		Short GI [dBm]	Long GI [dBm]
11ac-80	1	0	-10.17		2.92	-7.25	
		1	-10.05		2.92	-7.13	
		2	-9.99		2.92	-7.07	
		3	-10.04		2.92	-7.12	
		4	-10.02		2.92	-7.10	
		5	-9.97		2.92	-7.05	
		6	-9.93		2.92	-7.01	
		7	-9.92	-9.95	2.92	-7.00	-7.03
		8	-11.77		2.92	-8.85	
		9	-11.80		2.92	-8.88	
	2	0	-10.00		2.11	-7.89	
		1	-9.96		2.11	-7.85	
		2	-9.96		2.11	-7.85	
		3	-9.95		2.11	-7.84	
		4	-9.97		2.11	-7.86	
		5	-9.90		2.11	-7.79	
		6	-9.81		2.11	-7.70	
		7	-9.79	-9.80	2.11	-7.68	-7.69
		8	-11.51		2.11	-9.40	
		9	-11.50		2.11	-9.39	

Sample Calculation: e.i.r.p = Reading + Antenna Gain

Reading (Burst Power) is used the gating functionality of the power meter.

All comparison were carried out on same frequency and measurement factors.

Italic font is worst rate. (It was calculated respectively in the Burst Power and e.i.r.p.)

This test was performed using the gate function.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Average Output Power
(Reference data for RF Exposure)

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 14, 2021 June 15, 2021
Temperature / Humidity 24 deg. C / 59 % RH 25 deg. C / 67 % RH
Engineer Takafumi Noguchi Takafumi Noguchi
Mode Tx 11a

Antenna 1

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Burst power average)	
				[dBm]	[mW]
5180	-6.97	2.18	10.09	5.30	3.39
5220	-7.13	2.18	10.09	5.14	3.27
5240	-7.14	2.20	10.09	5.15	3.27
5745	-7.74	2.35	10.09	4.70	2.95
5785	-7.78	2.35	10.09	4.66	2.92
5825	-7.68	2.37	10.09	4.78	3.01

Sample Calculation:

Result (Burst power average) = Reading + Cable Loss + Atten. Loss

*The equipment and cables were not used for factor 0 dB of the data sheets.

Antenna 2

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Burst power average)	
				[dBm]	[mW]
5180	-6.69	2.18	10.09	5.58	3.61
5220	-6.91	2.19	10.09	5.37	3.44
5240	-6.98	2.20	10.09	5.31	3.40
5745	-8.07	2.35	10.09	4.37	2.74
5785	-8.21	2.36	10.09	4.24	2.65
5825	-8.13	2.37	10.09	4.33	2.71

Sample Calculation:

Result (Burst power average) = Reading + Cable Loss + Atten. Loss

*The equipment and cables were not used for factor 0 dB of the data sheets.

**The average output power was measured with the lowest order modulation and
lowest data rate configuration in each IEEE 802.11 mode based on KDB 248227 D01.**

Average Output Power **(Reference data for RF Exposure)**

Report No.	13828808H		
Test place	Ise EMC Lab. No.6 Measurement Room		
Date	June 14, 2021	June 15, 2021	
Temperature / Humidity	24 deg. C / 59 % RH	25 deg. C / 67 % RH	
Engineer	Takafumi Noguchi	Takafumi Noguchi	
Mode	Tx 11n-20		

Antenna 1

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Burst power average)	
				[dBm]	[mW]
5180	-8.10	2.18	10.09	4.17	2.61
5220	-8.15	2.18	10.09	4.12	2.58
5240	-8.00	2.20	10.09	4.29	2.69
5745	-8.80	2.35	10.09	3.64	2.31
5785	-8.82	2.35	10.09	3.62	2.30
5825	-8.73	2.37	10.09	3.73	2.36

Sample Calculation:

Result (Burst power average) = Reading + Cable Loss + Atten. Loss

*The equipment and cables were not used for factor 0 dB of the data sheets.

Antenna 2

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Burst power average)	
				[dBm]	[mW]
5180	-7.79	2.18	10.09	4.48	2.81
5220	-8.04	2.19	10.09	4.24	2.65
5240	-8.12	2.20	10.09	4.17	2.61
5745	-9.21	2.35	10.09	3.23	2.10
5785	-9.23	2.36	10.09	3.22	2.10
5825	-9.23	2.37	10.09	3.23	2.10

Sample Calculation:

Result (Burst power average) = Reading + Cable Loss + Atten. Loss

*The equipment and cables were not used for factor 0 dB of the data sheets.

The average output power was measured with the lowest order modulation and lowest data rate configuration in each IEEE 802.11 mode based on KDB 248227 D01.

Average Output Power
(Reference data for RF Exposure)

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 14, 2021 June 15, 2021
Temperature / Humidity 24 deg. C / 59 % RH 25 deg. C / 67 % RH
Engineer Takafumi Noguchi Takafumi Noguchi
Mode Tx 11ac-20

Antenna 1

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Burst power average)	
				[dBm]	[mW]
5180	-8.10	2.18	10.09	4.17	2.61
5220	-8.22	2.18	10.09	4.05	2.54
5240	-8.02	2.20	10.09	4.27	2.67
5745	-8.83	2.35	10.09	3.61	2.30
5785	-8.91	2.35	10.09	3.53	2.25
5825	-8.78	2.37	10.09	3.68	2.33

Sample Calculation:

Result (Burst power average) = Reading + Cable Loss + Atten. Loss

*The equipment and cables were not used for factor 0 dB of the data sheets.

Antenna 2

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Burst power average)	
				[dBm]	[mW]
5180	-7.83	2.18	10.09	4.44	2.78
5220	-8.06	2.19	10.09	4.22	2.64
5240	-8.15	2.20	10.09	4.14	2.59
5745	-9.13	2.35	10.09	3.31	2.14
5785	-9.22	2.36	10.09	3.23	2.10
5825	-9.27	2.37	10.09	3.19	2.08

Sample Calculation:

Result (Burst power average) = Reading + Cable Loss + Atten. Loss

*The equipment and cables were not used for factor 0 dB of the data sheets.

**The average output power was measured with the lowest order modulation and
lowest data rate configuration in each IEEE 802.11 mode based on KDB 248227 D01.**

Average Output Power **(Reference data for RF Exposure)**

Report No.	13828808H		
Test place	Ise EMC Lab. No.6 Measurement Room		
Date	June 14, 2021	June 15, 2021	
Temperature / Humidity	24 deg. C / 59 % RH	25 deg. C / 67 % RH	
Engineer	Takafumi Noguchi	Takafumi Noguchi	
Mode	Tx 11n-40		

Antenna 1

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Burst power average)	
				[dBm]	[mW]
5190	-8.82	2.18	10.09	3.45	2.21
5230	-8.93	2.20	10.09	3.36	2.17
5755	-9.56	2.35	10.09	2.88	1.94
5795	-9.56	2.35	10.09	2.88	1.94

Sample Calculation:

Result (Burst power average) = Reading + Cable Loss + Atten. Loss

*The equipment and cables were not used for factor 0 dB of the data sheets.

Antenna 2

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Burst power average)	
				[dBm]	[mW]
5190	-8.69	2.18	10.09	3.58	2.28
5230	-8.83	2.20	10.09	3.46	2.22
5755	-10.00	2.35	10.09	2.44	1.75
5795	-10.11	2.36	10.09	2.34	1.71

Sample Calculation:

Result (Burst power average) = Reading + Cable Loss + Atten. Loss

*The equipment and cables were not used for factor 0 dB of the data sheets.

The average output power was measured with the lowest order modulation and lowest data rate configuration in each IEEE 802.11 mode based on KDB 248227 D01.

Average Output Power
(Reference data for RF Exposure)

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 14, 2021 June 15, 2021
Temperature / Humidity 24 deg. C / 59 % RH 25 deg. C / 67 % RH
Engineer Takafumi Noguchi Takafumi Noguchi
Mode Tx 11ac-40

Antenna 1

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Burst power average)	
				[dBm]	[mW]
5190	-8.81	2.18	10.09	3.46	2.22
5230	-8.90	2.20	10.09	3.39	2.18
5755	-9.55	2.35	10.09	2.89	1.95
5795	-9.57	2.35	10.09	2.87	1.94

Sample Calculation:

Result (Burst power average) = Reading + Cable Loss + Atten. Loss

*The equipment and cables were not used for factor 0 dB of the data sheets.

Antenna 2

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Burst power average)	
				[dBm]	[mW]
5190	-8.69	2.18	10.09	3.58	2.28
5230	-8.86	2.20	10.09	3.43	2.20
5755	-10.05	2.35	10.09	2.39	1.73
5795	-10.11	2.36	10.09	2.34	1.71

Sample Calculation:

Result (Burst power average) = Reading + Cable Loss + Atten. Loss

*The equipment and cables were not used for factor 0 dB of the data sheets.

**The average output power was measured with the lowest order modulation and
lowest data rate configuration in each IEEE 802.11 mode based on KDB 248227 D01.**

Average Output Power **(Reference data for RF Exposure)**

Report No.	13828808H		
Test place	Ise EMC Lab. No.6 Measurement Room		
Date	June 14, 2021	June 15, 2021	
Temperature / Humidity	24 deg. C / 59 % RH	25 deg. C / 67 % RH	
Engineer	Takafumi Noguchi	Takafumi Noguchi	
Mode	Tx 11ac-80		

Antenna 1

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Burst power average)	
				[dBm]	[mW]
5210	-9.97	2.18	10.09	2.30	1.70
5775	-10.66	2.35	10.09	1.78	1.51

Sample Calculation:

Result (Burst power average) = Reading + Cable Loss + Atten. Loss

*The equipment and cables were not used for factor 0 dB of the data sheets.

Antenna 2

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Burst power average)	
				[dBm]	[mW]
5210	-9.84	2.19	10.09	2.44	1.75
5775	-10.81	2.35	10.09	1.63	1.46

Sample Calculation:

Result (Burst power average) = Reading + Cable Loss + Atten. Loss


*The equipment and cables were not used for factor 0 dB of the data sheets.

The average output power was measured with the lowest order modulation and lowest data rate configuration in each IEEE 802.11 mode based on KDB 248227 D01.


Burst rate confirmation

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 13, 2021
Temperature / Humidity 25 deg. C / 55 % RH
Engineer Akihiko Maeda
Mode Tx


11a 54 Mbps

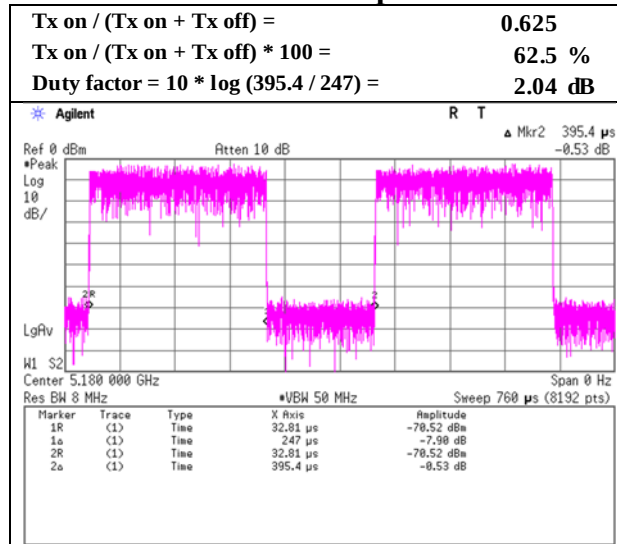

11n-20 MCS 7 SGI

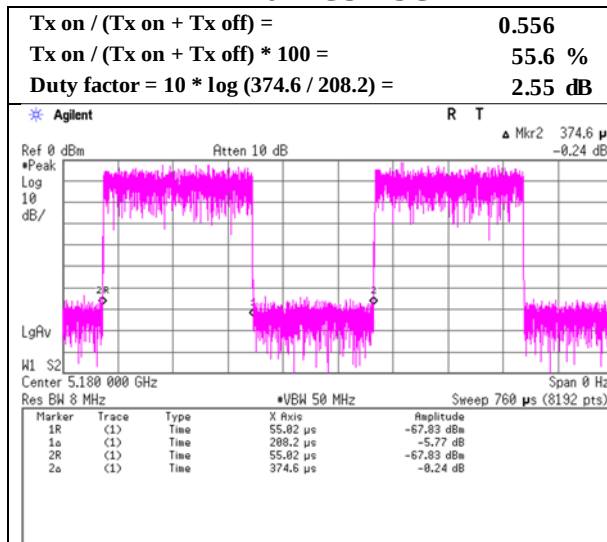


11ac-20 MCS 7 SGI

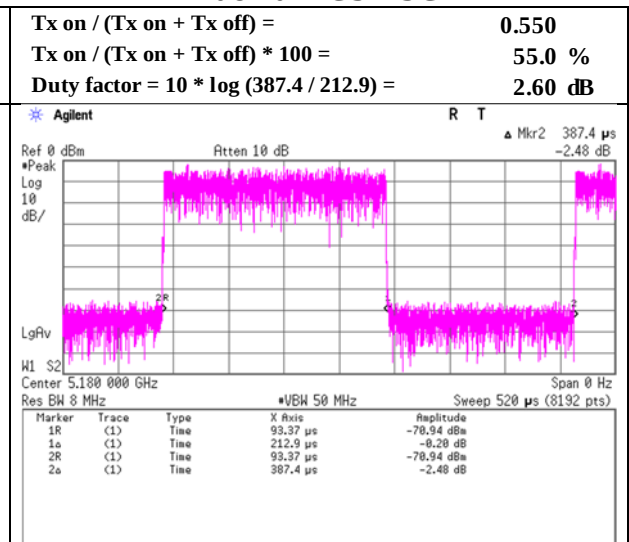


Burst rate confirmation

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 13, 2021
Temperature / Humidity 25 deg. C / 55 % RH
Engineer Akihiko Maeda
Mode Tx


11n-40 MCS 7 SGI

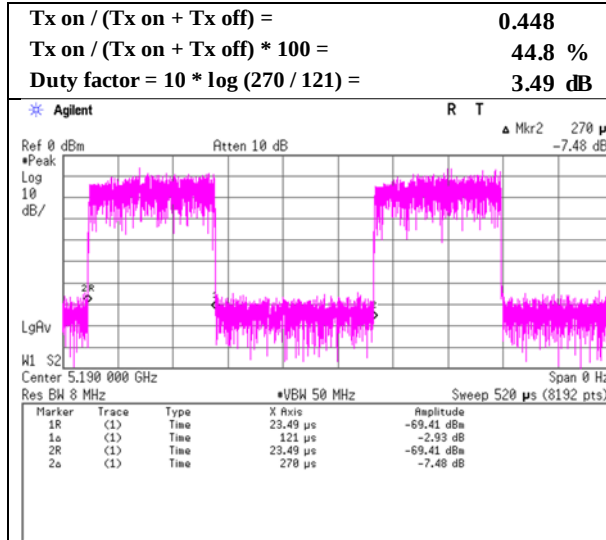

11ac-40 MCS 7 SGI

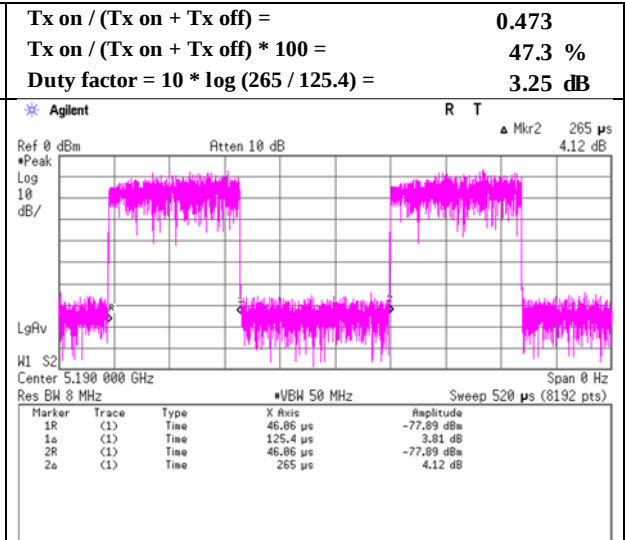


11ac-80 MCS 7 SGI

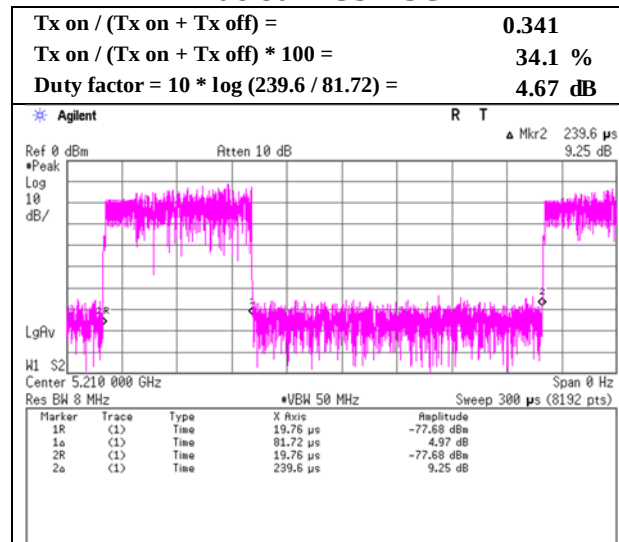


Burst rate confirmation

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 13, 2021
Temperature / Humidity 25 deg. C / 55 % RH
Engineer Akihiko Maeda
Mode Tx


11a 6 Mbps

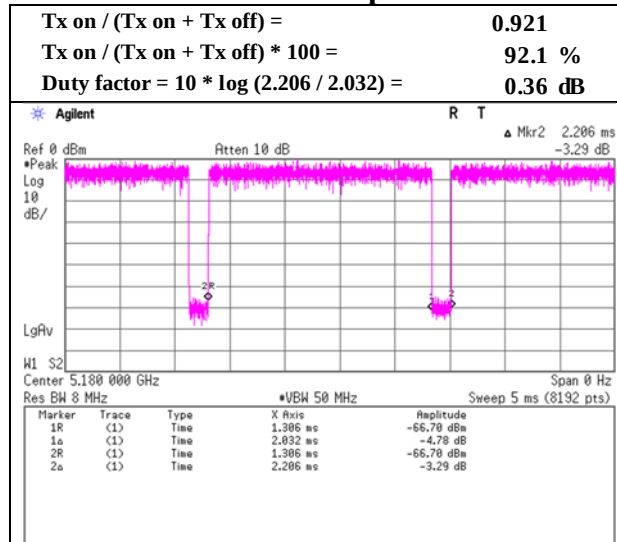

11n-20 MCS 0 LGI

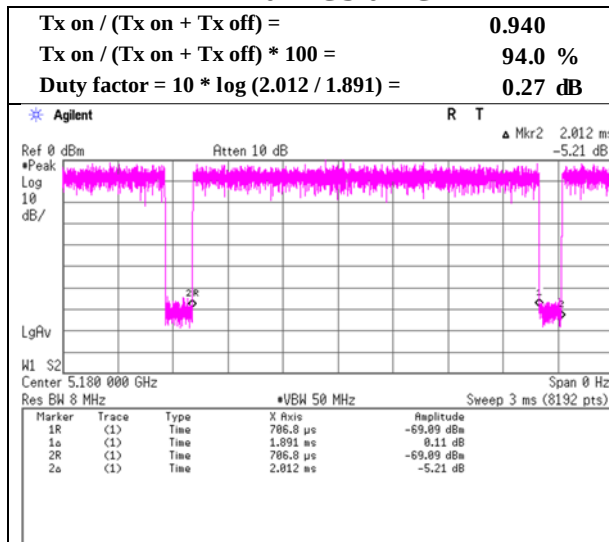


11ac-20 MCS 0 LGI

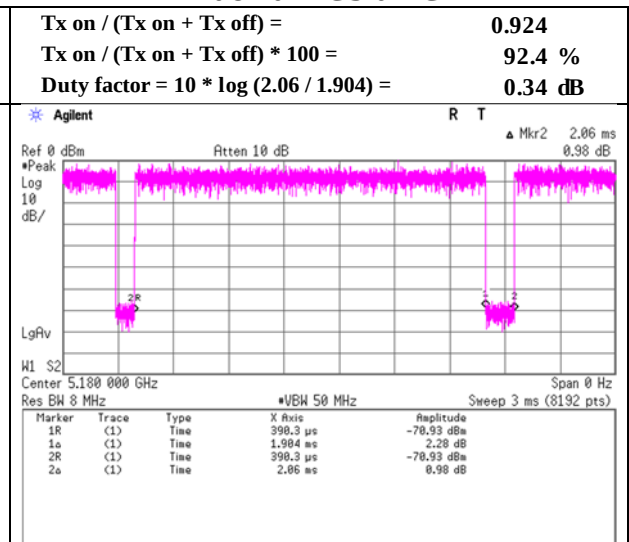


Burst rate confirmation

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 13, 2021
Temperature / Humidity 25 deg. C / 55 % RH
Engineer Akihiko Maeda
Mode Tx


11n-40 MCS 0 LGI

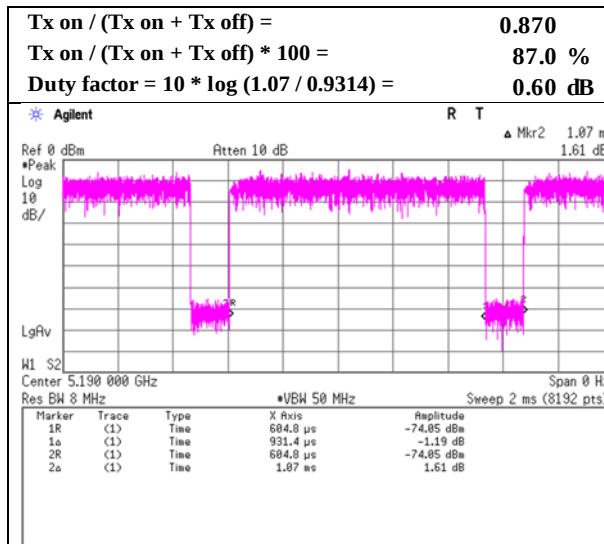

11ac-40 MCS 0 LGI

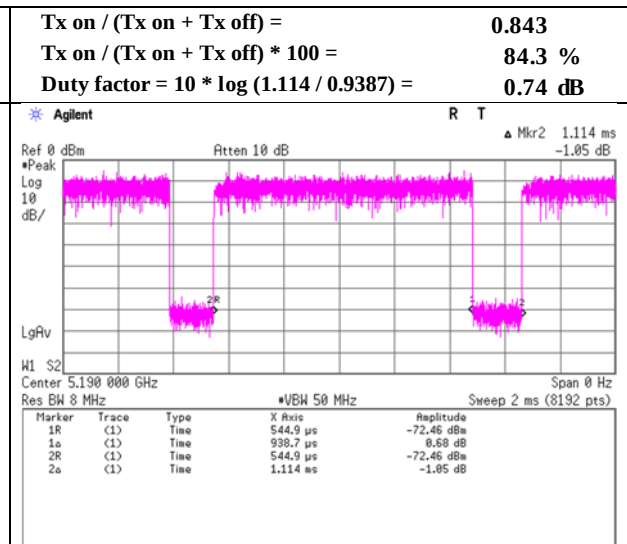

11ac-80 MCS 0 LGI

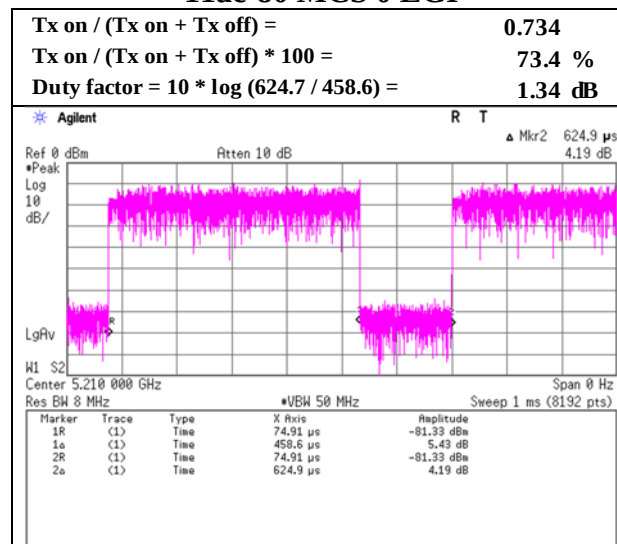

Maximum Power Spectral Density

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 15, 2021
Temperature / Humidity 25 deg. C / 67 % RH
Engineer Takafumi Noguchi
Mode Tx 11a

Antenna 1

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5180	-19.38	2.18	10.09	2.04	2.92	0.00	-5.07	11.00	16.07	-2.15	17.00	19.15
5220	-19.68	2.18	10.09	2.04	2.92	0.00	-5.37	11.00	16.37	-2.45	17.00	19.45
5240	-19.69	2.20	10.09	2.04	2.92	0.00	-5.36	11.00	16.36	-2.44	17.00	19.44
5745	-23.54	2.35	10.09	2.04	2.92	0.27	-8.79	30.00	38.79	-5.87	36.00	41.87
5785	-23.79	2.35	10.09	2.04	2.92	0.27	-9.04	30.00	39.04	-6.12	36.00	42.12
5825	-23.39	2.37	10.09	2.04	2.92	0.27	-8.62	30.00	38.62	-5.70	36.00	41.70

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD Result (Conducted) = Reading + Cable Loss + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

Antenna 2

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5180	-19.49	2.18	10.09	2.04	2.11	0.00	-5.18	11.00	16.18	-3.07	17.00	20.07
5220	-19.62	2.19	10.09	2.04	2.11	0.00	-5.30	11.00	16.30	-3.19	17.00	20.19
5240	-19.78	2.20	10.09	2.04	2.11	0.00	-5.45	11.00	16.45	-3.34	17.00	20.34
5745	-24.14	2.35	10.09	2.04	2.11	0.27	-9.39	30.00	39.39	-7.28	36.00	43.28
5785	-23.75	2.36	10.09	2.04	2.11	0.27	-8.99	30.00	38.99	-6.88	36.00	42.88
5825	-23.85	2.37	10.09	2.04	2.11	0.27	-9.08	30.00	39.08	-6.97	36.00	42.97

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD Result (Conducted) = Reading + Cable Loss + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

Maximum Power Spectral Density

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 15, 2021
Temperature / Humidity 25 deg. C / 67 % RH
Engineer Takafumi Noguchi
Mode Tx 11n-20

Antenna 1

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5180	-18.93	2.18	10.09	2.55	2.92	0.00	-4.11	11.00	15.11	-1.19	17.00	18.19
5220	-21.13	2.18	10.09	2.55	2.92	0.00	-6.31	11.00	17.31	-3.39	17.00	20.39
5240	-21.36	2.20	10.09	2.55	2.92	0.00	-6.52	11.00	17.52	-3.60	17.00	20.60
5745	-25.02	2.35	10.09	2.55	2.92	0.27	-9.76	30.00	39.76	-6.84	36.00	42.84
5785	-24.84	2.35	10.09	2.55	2.92	0.27	-9.58	30.00	39.58	-6.66	36.00	42.66
5825	-24.96	2.37	10.09	2.55	2.92	0.27	-9.68	30.00	39.68	-6.76	36.00	42.76

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD Result (Conducted) = Reading + Cable Loss + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

Antenna 2

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5180	-20.68	2.18	10.09	2.55	2.11	0.00	-5.86	11.00	16.86	-3.75	17.00	20.75
5220	-21.05	2.19	10.09	2.55	2.11	0.00	-6.22	11.00	17.22	-4.11	17.00	21.11
5240	-21.08	2.20	10.09	2.55	2.11	0.00	-6.24	11.00	17.24	-4.13	17.00	21.13
5745	-25.27	2.35	10.09	2.55	2.11	0.27	-10.01	30.00	40.01	-7.90	36.00	43.90
5785	-25.40	2.36	10.09	2.55	2.11	0.27	-10.13	30.00	40.13	-8.02	36.00	44.02
5825	-25.06	2.37	10.09	2.55	2.11	0.27	-9.78	30.00	39.78	-7.67	36.00	43.67

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD Result (Conducted) = Reading + Cable Loss + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Maximum Power Spectral Density

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 15, 2021
Temperature / Humidity 25 deg. C / 67 % RH
Engineer Takafumi Noguchi
Mode Tx 11ac-20

Antenna 1

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5180	-21.14	2.18	10.09	2.60	2.92	0.00	-6.27	11.00	17.27	-3.35	17.00	20.35
5220	-21.48	2.18	10.09	2.60	2.92	0.00	-6.61	11.00	17.61	-3.69	17.00	20.69
5240	-21.32	2.20	10.09	2.60	2.92	0.00	-6.43	11.00	17.43	-3.51	17.00	20.51
5745	-24.58	2.35	10.09	2.60	2.92	0.27	-9.27	30.00	39.27	-6.35	36.00	42.35
5785	-25.01	2.35	10.09	2.60	2.92	0.27	-9.70	30.00	39.70	-6.78	36.00	42.78
5825	-24.93	2.37	10.09	2.60	2.92	0.27	-9.60	30.00	39.60	-6.68	36.00	42.68

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD Result (Conducted) = Reading + Cable Loss + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

Antenna 2

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5180	-20.82	2.18	10.09	2.60	2.11	0.00	-5.95	11.00	16.95	-3.84	17.00	20.84
5220	-21.33	2.19	10.09	2.60	2.11	0.00	-6.45	11.00	17.45	-4.34	17.00	21.34
5240	-20.76	2.20	10.09	2.60	2.11	0.00	-5.87	11.00	16.87	-3.76	17.00	20.76
5745	-25.10	2.35	10.09	2.60	2.11	0.27	-9.79	30.00	39.79	-7.68	36.00	43.68
5785	-25.18	2.36	10.09	2.60	2.11	0.27	-9.86	30.00	39.86	-7.75	36.00	43.75
5825	-25.37	2.37	10.09	2.60	2.11	0.27	-10.04	30.00	40.04	-7.93	36.00	43.93

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD Result (Conducted) = Reading + Cable Loss + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Maximum Power Spectral Density

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 15, 2021
Temperature / Humidity 25 deg. C / 67 % RH
Engineer Takafumi Noguchi
Mode Tx 11n-40

Antenna 1

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5190	-26.00	2.18	10.09	3.49	2.92	0.00	-10.24	11.00	21.24	-7.32	17.00	24.32
5230	-26.05	2.20	10.09	3.49	2.92	0.00	-10.27	11.00	21.27	-7.35	17.00	24.35
5755	-29.42	2.35	10.09	3.49	2.92	0.27	-13.23	30.00	43.23	-10.31	36.00	46.31
5795	-29.63	2.35	10.09	3.49	2.92	0.27	-13.44	30.00	43.44	-10.52	36.00	46.52

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD Result (Conducted) = Reading + Cable Loss + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

Antenna 2

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5190	-25.47	2.18	10.09	3.49	2.11	0.00	-9.71	11.00	20.71	-7.60	17.00	24.60
5230	-26.30	2.20	10.09	3.49	2.11	0.00	-10.52	11.00	21.52	-8.41	17.00	25.41
5755	-29.53	2.35	10.09	3.49	2.11	0.27	-13.34	30.00	43.34	-11.23	36.00	47.23
5795	-30.12	2.37	10.09	3.49	2.11	0.27	-13.91	30.00	43.91	-11.80	36.00	47.80

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD Result (Conducted) = Reading + Cable Loss + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Maximum Power Spectral Density

Report No.	13828808H
Test place	Ise EMC Lab. No.6 Measurement Room
Date	June 15, 2021
Temperature / Humidity	25 deg. C / 67 % RH
Engineer	Takafumi Noguchi
Mode	Tx 11ac-40

Antenna 1

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5190	-25.50	2.18	10.09	3.25	2.92	0.00	-9.98	11.00	20.98	-7.06	17.00	24.06
5230	-25.97	2.20	10.09	3.25	2.92	0.00	-10.43	11.00	21.43	-7.51	17.00	24.51
5755	-29.46	2.35	10.09	3.25	2.92	0.27	-13.50	30.00	43.50	-10.58	36.00	46.58
5795	-29.27	2.35	10.09	3.25	2.92	0.27	-13.31	30.00	43.31	-10.39	36.00	46.39

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD Result (Conducted) = Reading + Cable Lo + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

Antenna 2

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5190	-25.23	2.18	10.09	3.25	2.11	0.00	-9.71	11.00	20.71	-7.60	17.00	24.60
5230	-25.69	2.20	10.09	3.25	2.11	0.00	-10.15	11.00	21.15	-8.04	17.00	25.04
5755	-29.79	2.35	10.09	3.25	2.11	0.27	-13.83	30.00	43.83	-11.72	36.00	47.72
5795	-29.86	2.37	10.09	3.25	2.11	0.27	-13.88	30.00	43.88	-11.77	36.00	47.77

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD Result (Conducted) = Reading + Cable Loss + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Maximum Power Spectral Density

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 15, 2021
Temperature / Humidity 25 deg. C / 67 % RH
Engineer Takafumi Noguchi
Mode Tx 11ac-80

Antenna 1

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5210	-30.59	2.18	10.09	4.67	2.92	0.00	-13.65	11.00	24.65	-10.73	17.00	27.73
5775	-33.44	2.35	10.09	4.67	2.92	0.27	-16.06	30.00	46.06	-13.14	36.00	49.14

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD Result (Conducted) = Reading + Cable Loss + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

Antenna 2

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5210	-30.45	2.18	10.09	4.67	2.11	0.00	-13.51	11.00	24.51	-11.40	17.00	28.40
5775	-34.23	2.37	10.09	4.67	2.11	0.27	-16.83	30.00	46.83	-14.72	36.00	50.72

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD Result (Conducted) = Reading + Cable Loss + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Maximum Power Spectral Density

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 15, 2021
Temperature / Humidity 25 deg. C / 67 % RH
Engineer Takafumi Noguchi
Mode Tx 11a Antenna 1

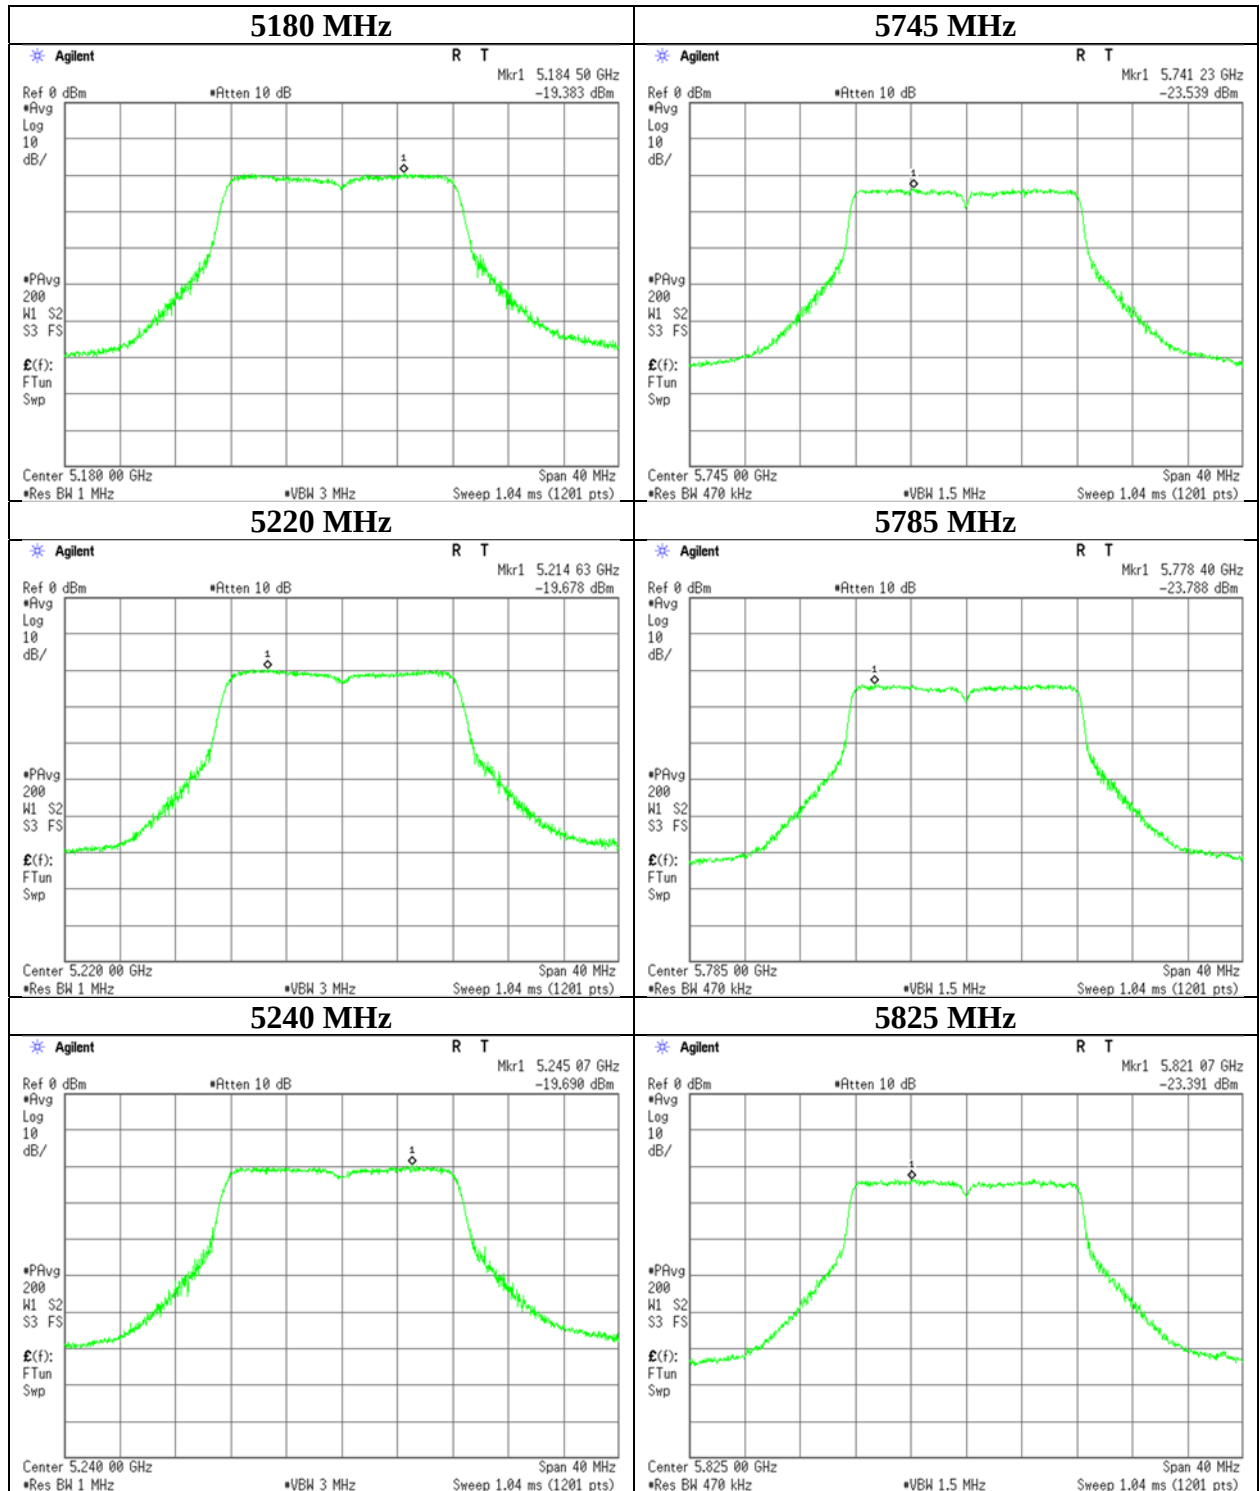

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Maximum Power Spectral Density

Report No.	13828808H
Test place	Ise EMC Lab. No.6 Measurement Room
Date	June 15, 2021
Temperature / Humidity	25 deg. C / 67 % RH
Engineer	Takafumi Noguchi
Mode	Tx 11a Antenna 2

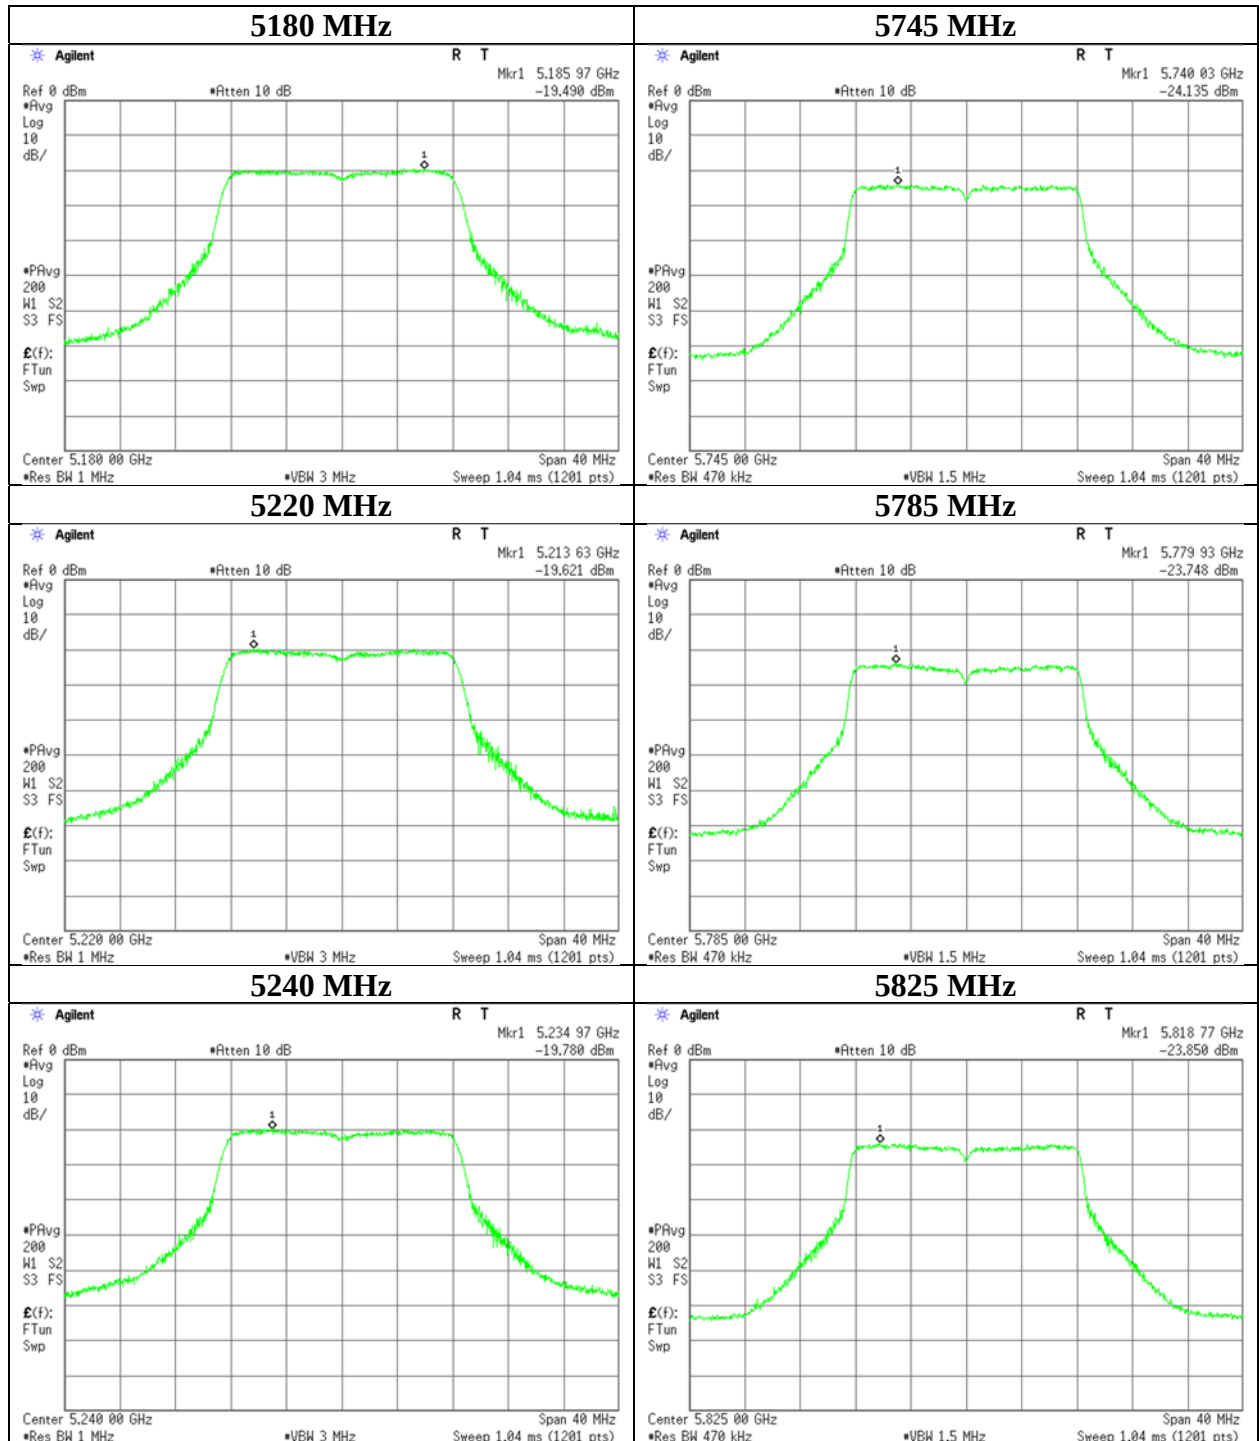

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Maximum Power Spectral Density

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 15, 2021
Temperature / Humidity 25 deg. C / 67 % RH
Engineer Takafumi Noguchi
Mode Tx 11n-20 Antenna 1

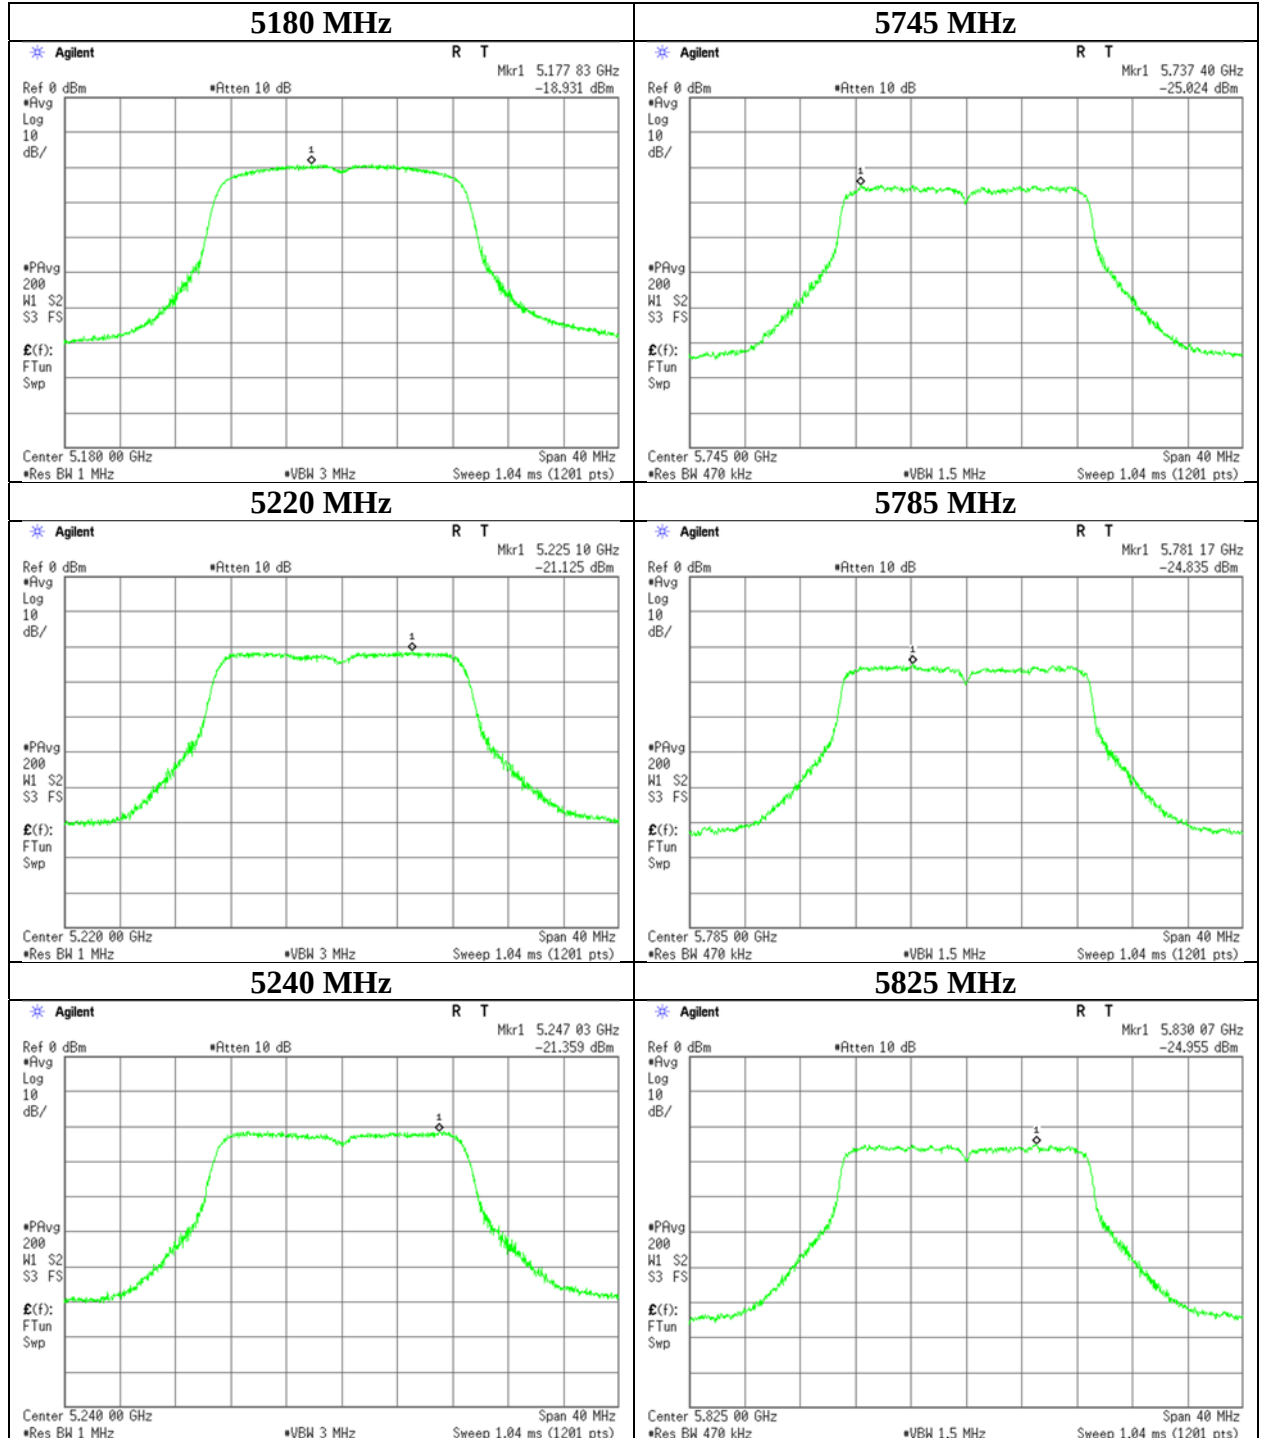

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Maximum Power Spectral Density

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 15, 2021
Temperature / Humidity 25 deg. C / 67 % RH
Engineer Takafumi Noguchi
Mode Tx 11n-20 Antenna 2

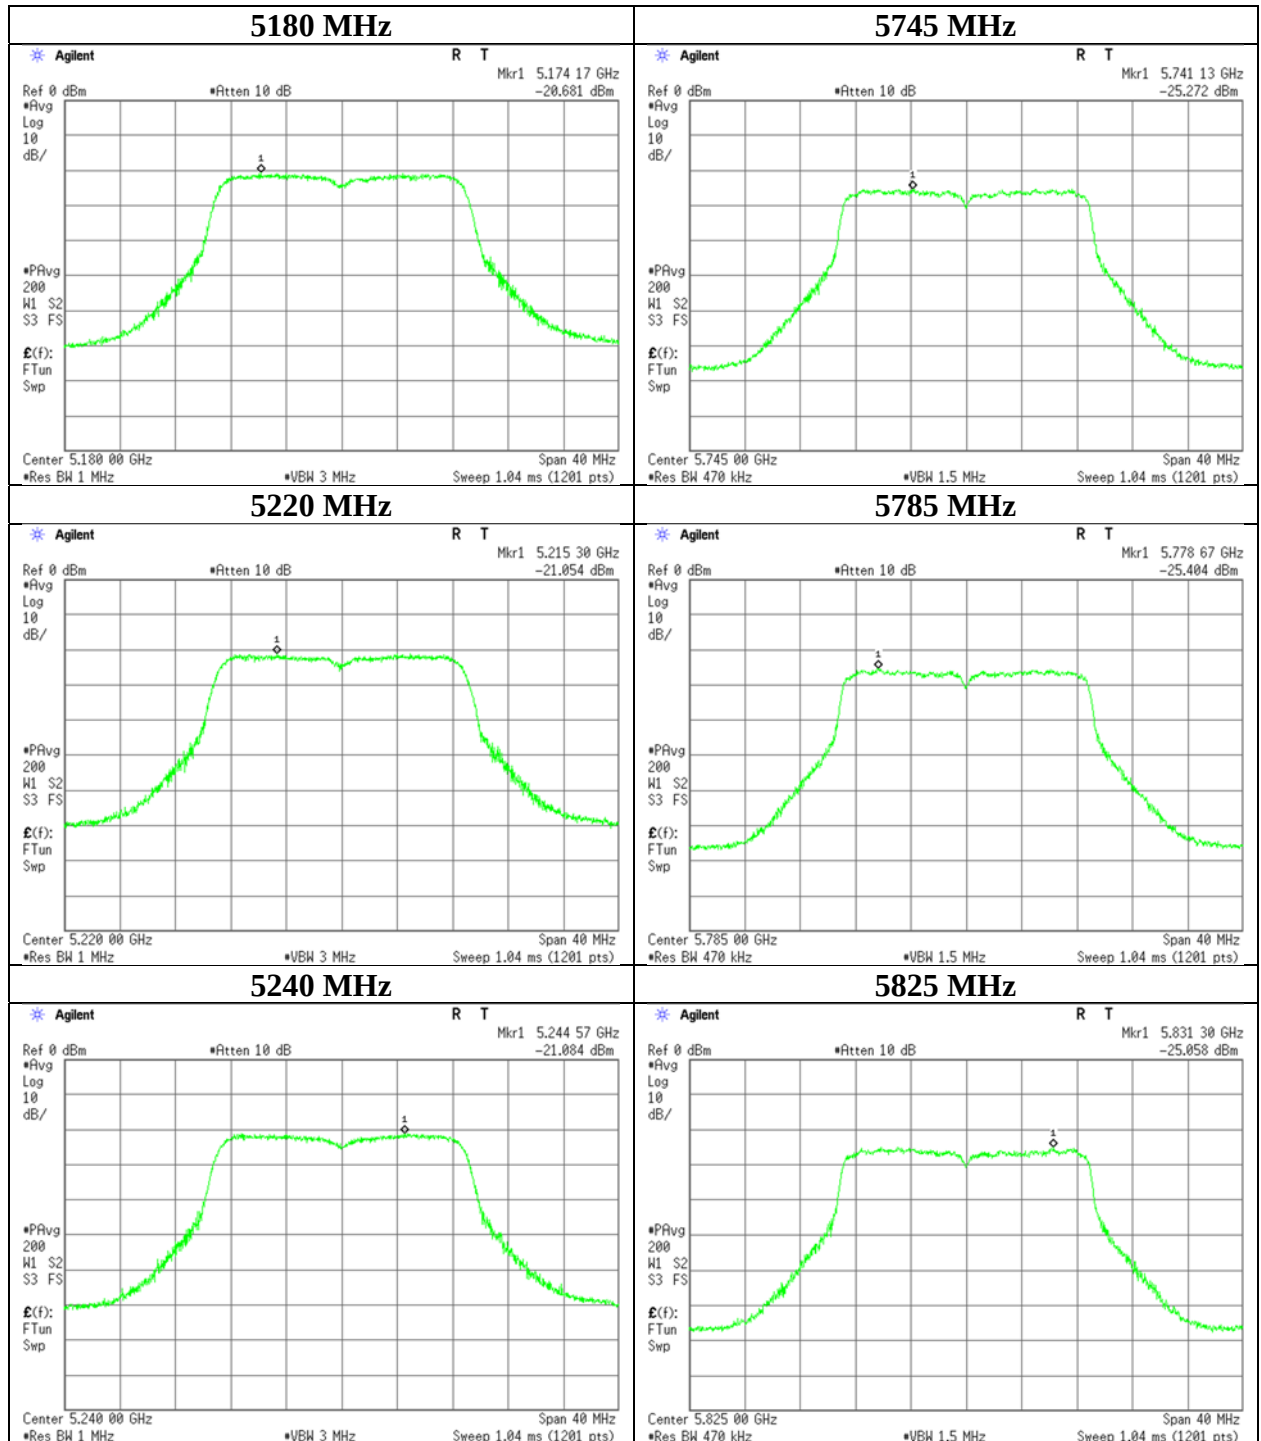

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Maximum Power Spectral Density

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 15, 2021
Temperature / Humidity 25 deg. C / 67 % RH
Engineer Takafumi Noguchi
Mode Tx 11ac-20 Antenna 1

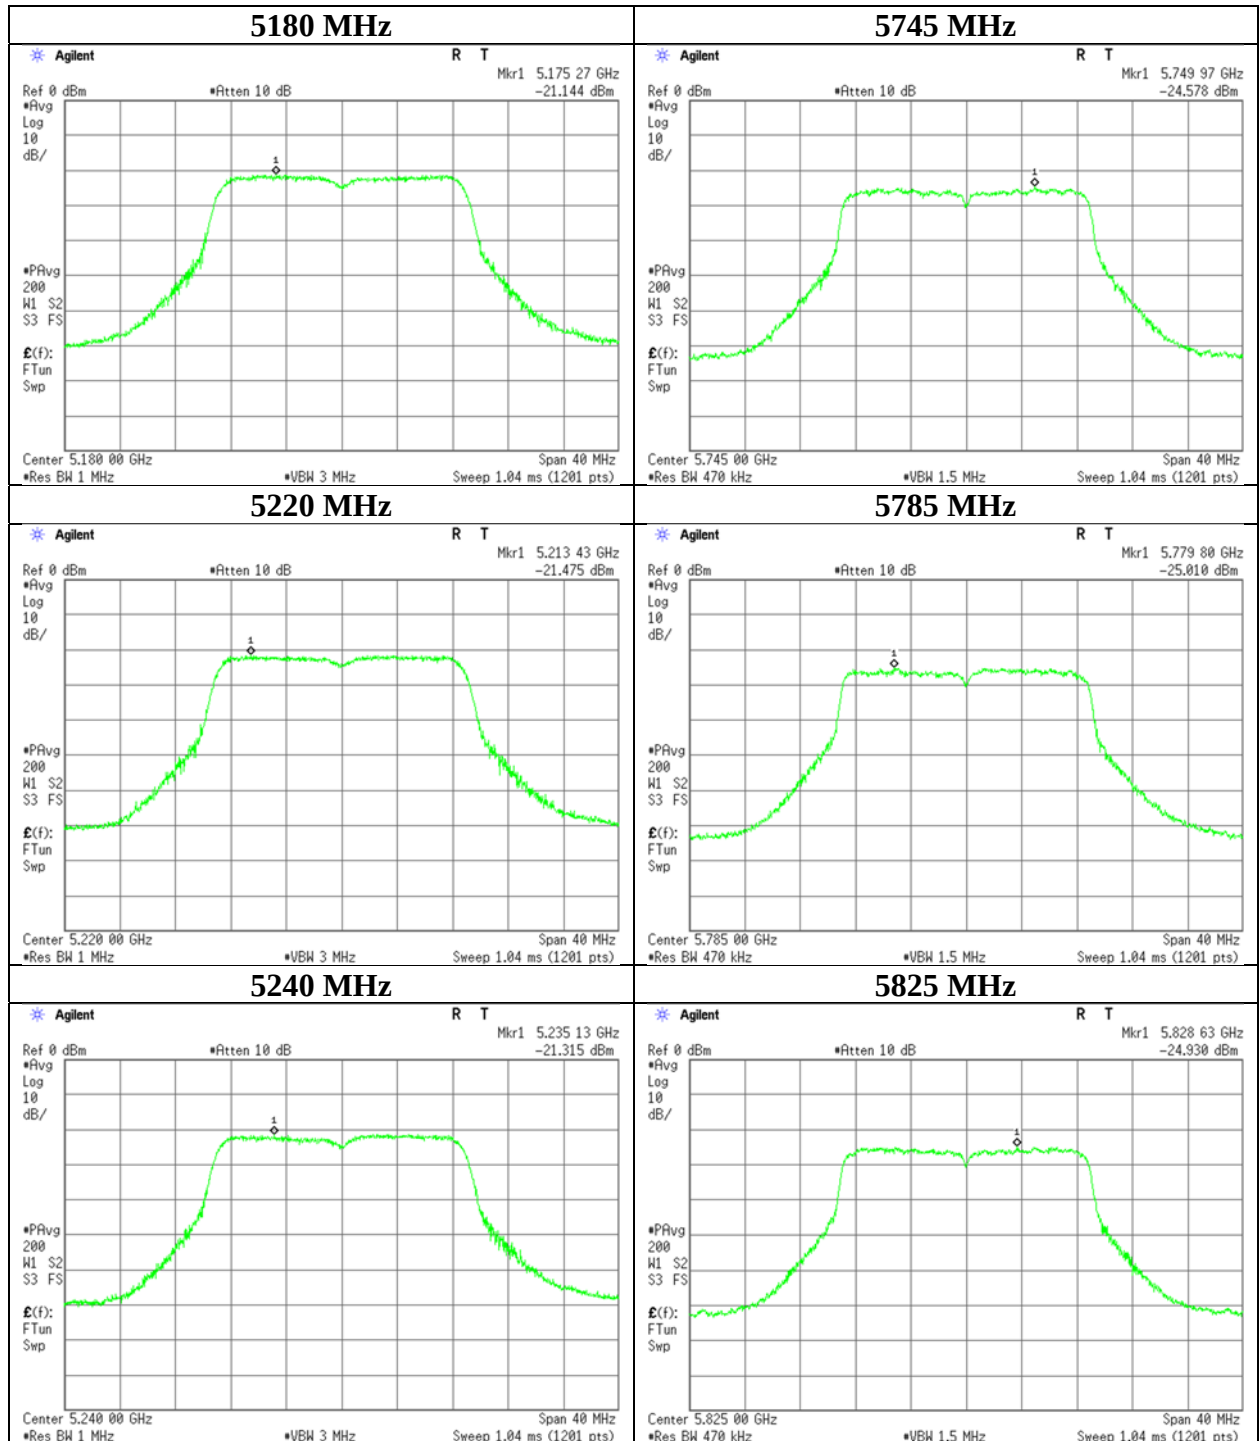

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Maximum Power Spectral Density

Report No.	13828808H
Test place	Ise EMC Lab. No.6 Measurement Room
Date	June 15, 2021
Temperature / Humidity	25 deg. C / 67 % RH
Engineer	Takafumi Noguchi
Mode	Tx 11ac-20 Antenna 2

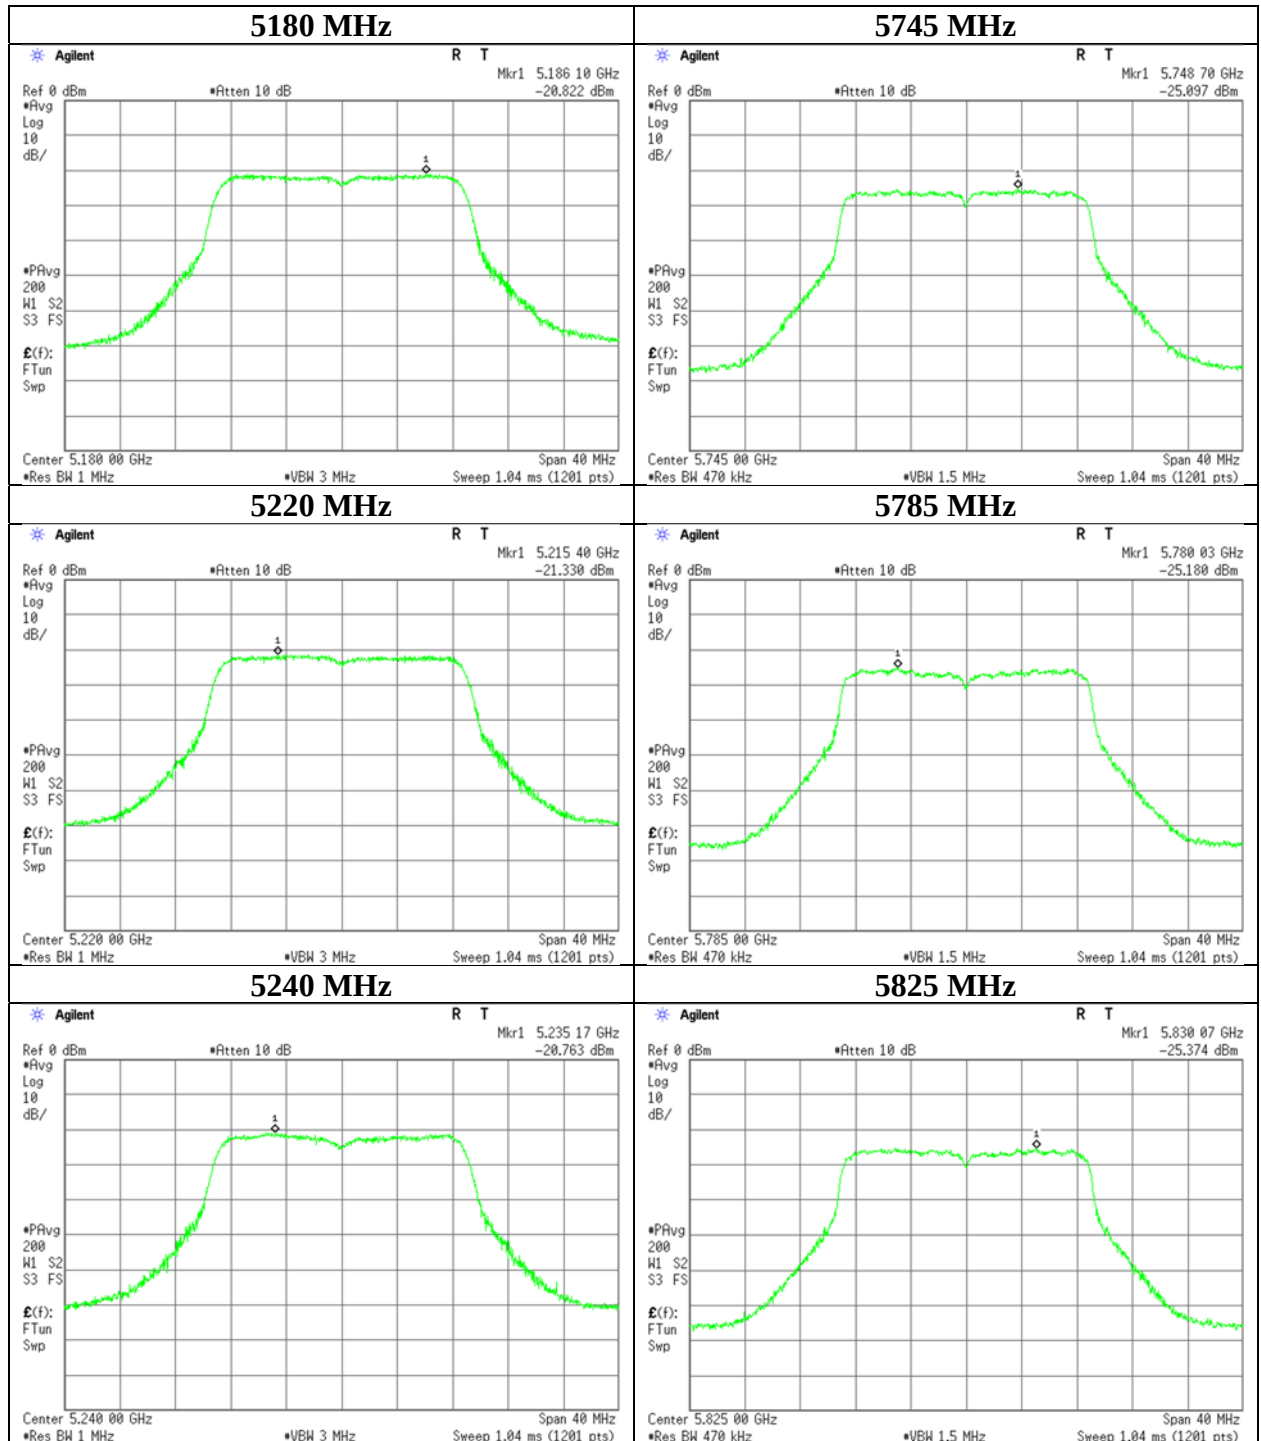

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Maximum Power Spectral Density

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 15, 2021
Temperature / Humidity 25 deg. C / 67 % RH
Engineer Takafumi Noguchi
Mode Tx 11n-40 Antenna 1

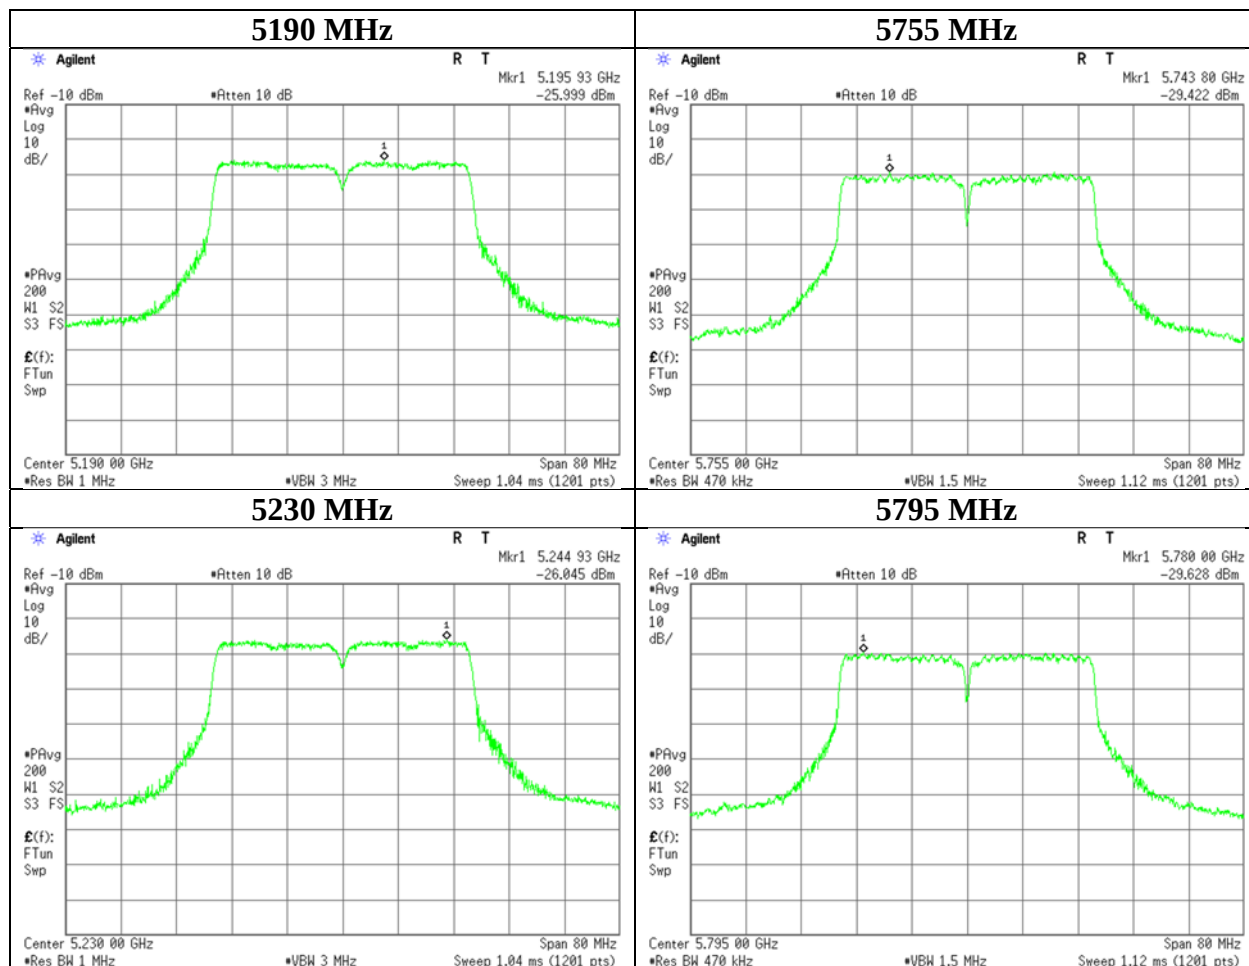

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Maximum Power Spectral Density

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 15, 2021
Temperature / Humidity 25 deg. C / 67 % RH
Engineer Takafumi Noguchi
Mode Tx 11n-40 Antenna 2

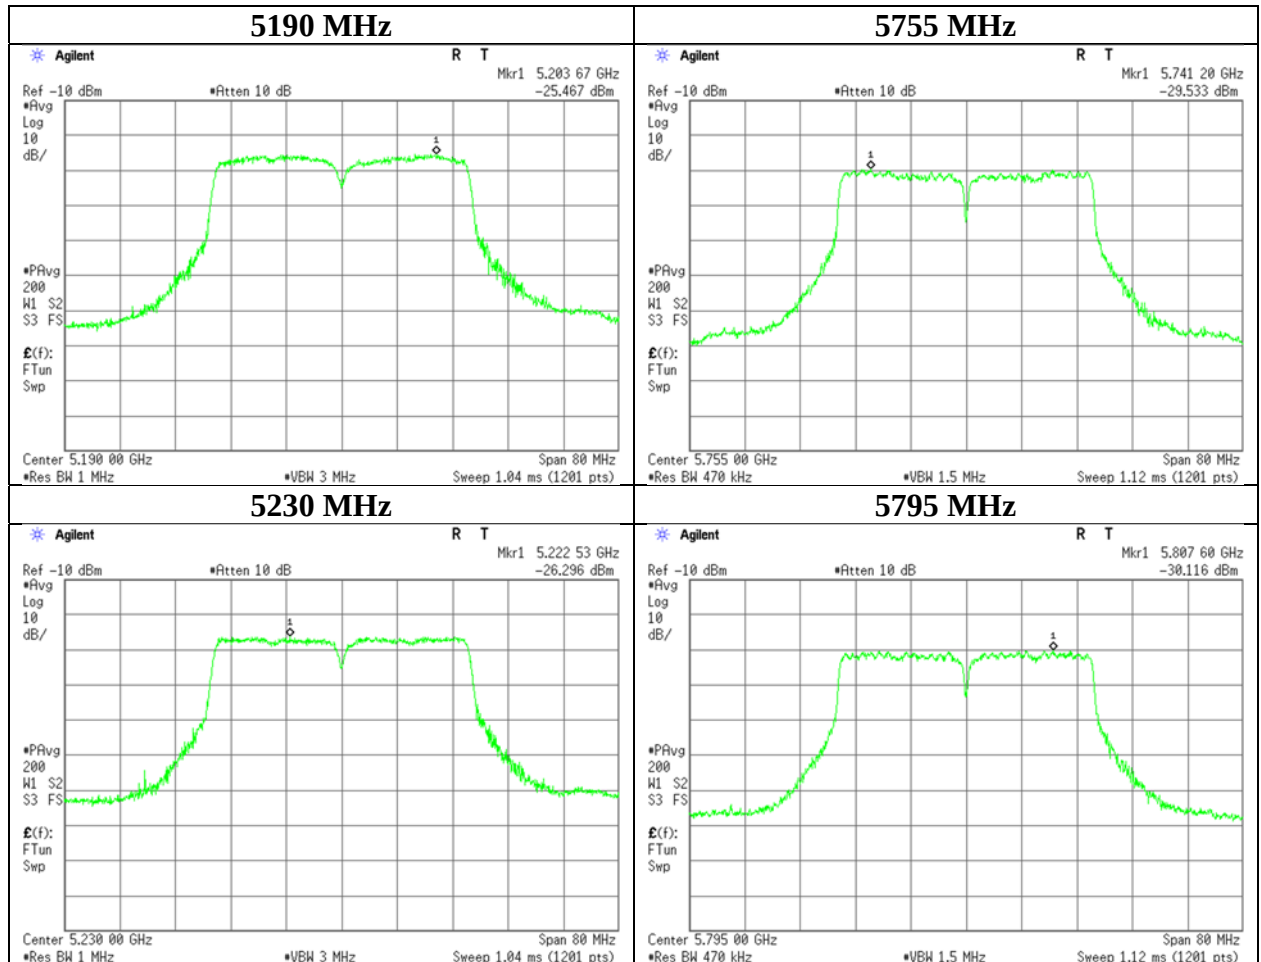

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Maximum Power Spectral Density

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 15, 2021
Temperature / Humidity 25 deg. C / 67 % RH
Engineer Takafumi Noguchi
Mode Tx 11ac-40 Antenna 1

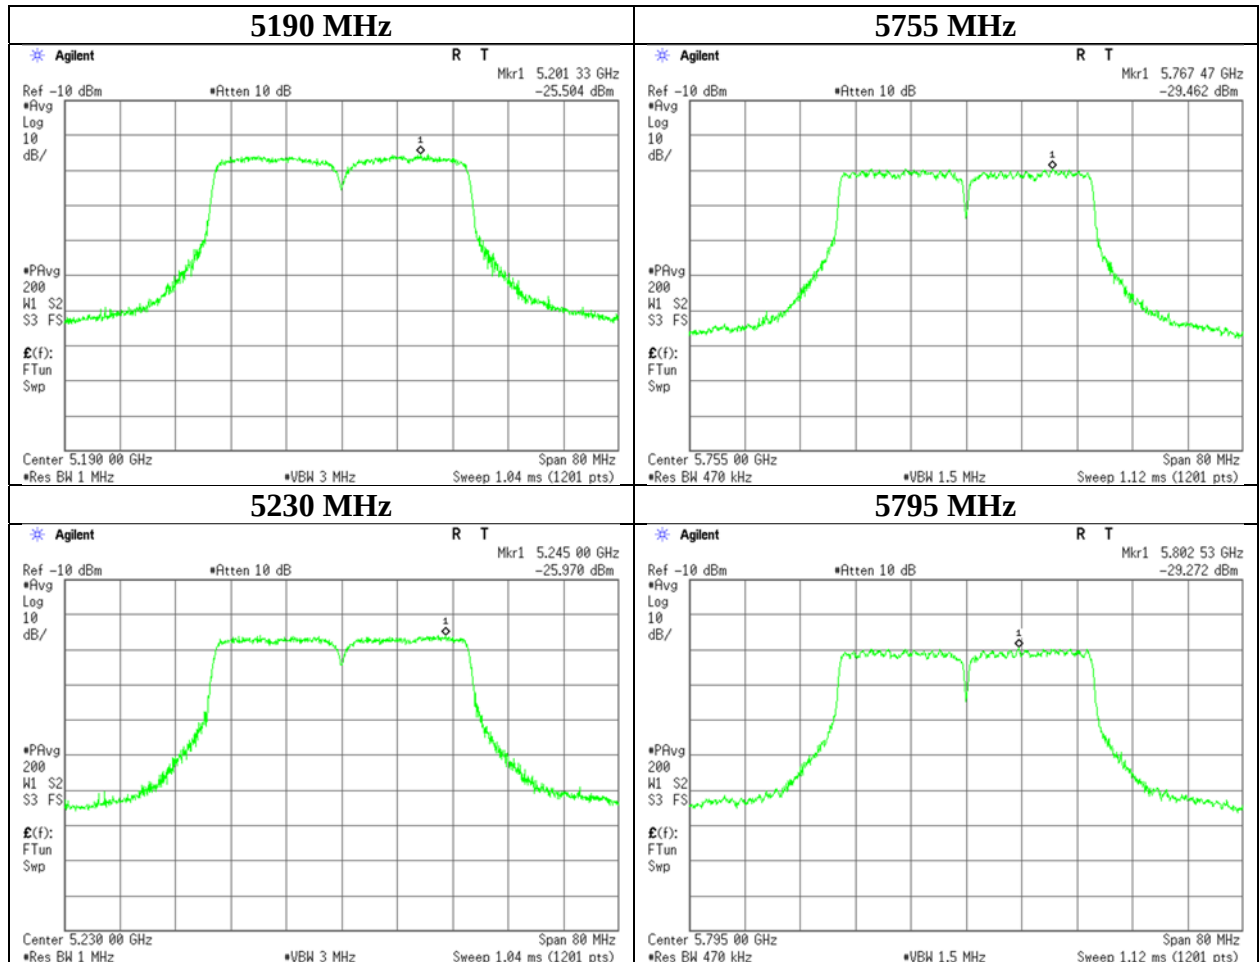

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Maximum Power Spectral Density

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 15, 2021
Temperature / Humidity 25 deg. C / 67 % RH
Engineer Takafumi Noguchi
Mode Tx 11ac-40 Antenna 2

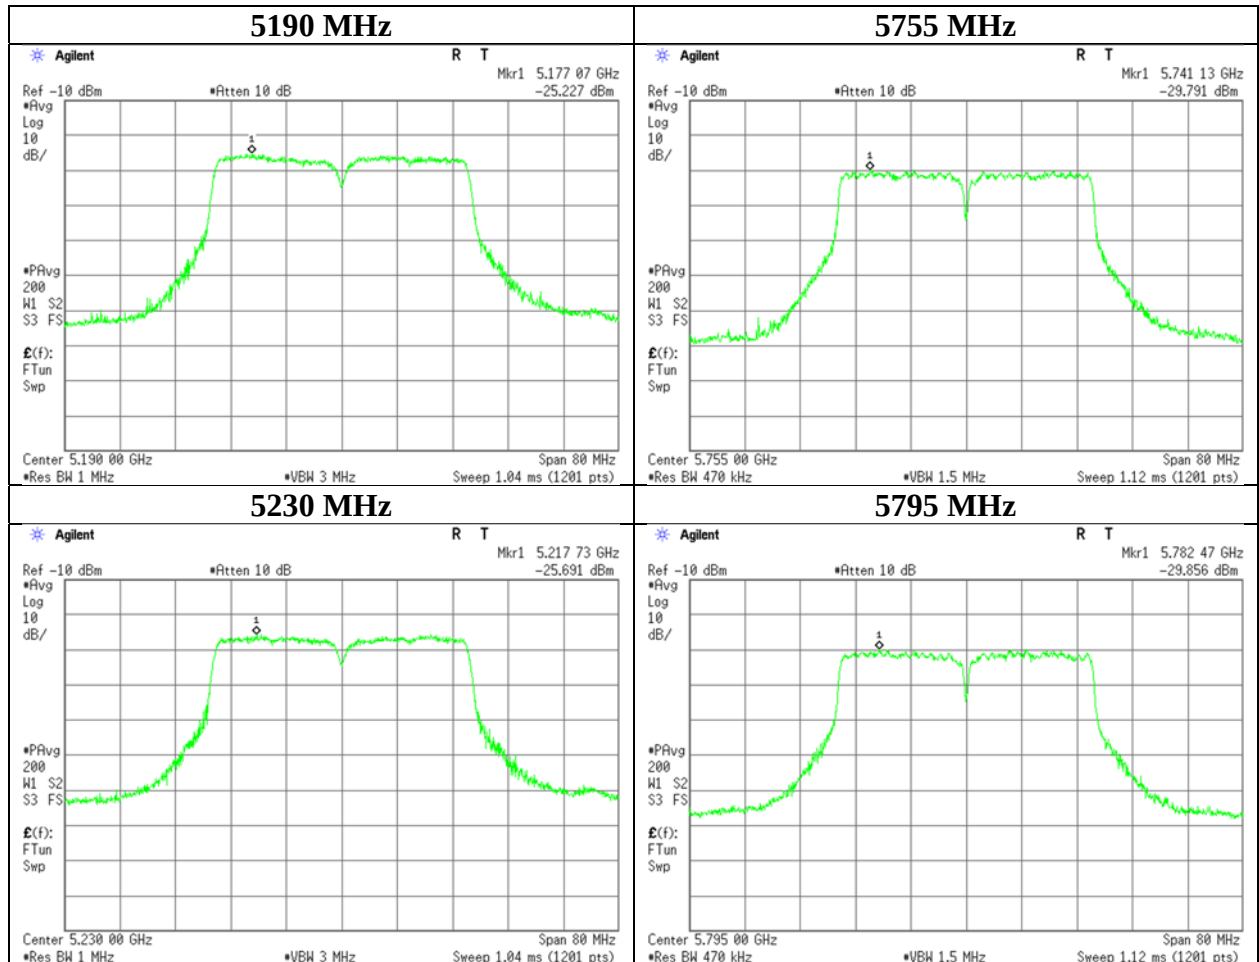

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124


Maximum Power Spectral Density

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 15, 2021
Temperature / Humidity 25 deg. C / 67 % RH
Engineer Takafumi Noguchi
Mode Tx 11ac-80 Antenna 1

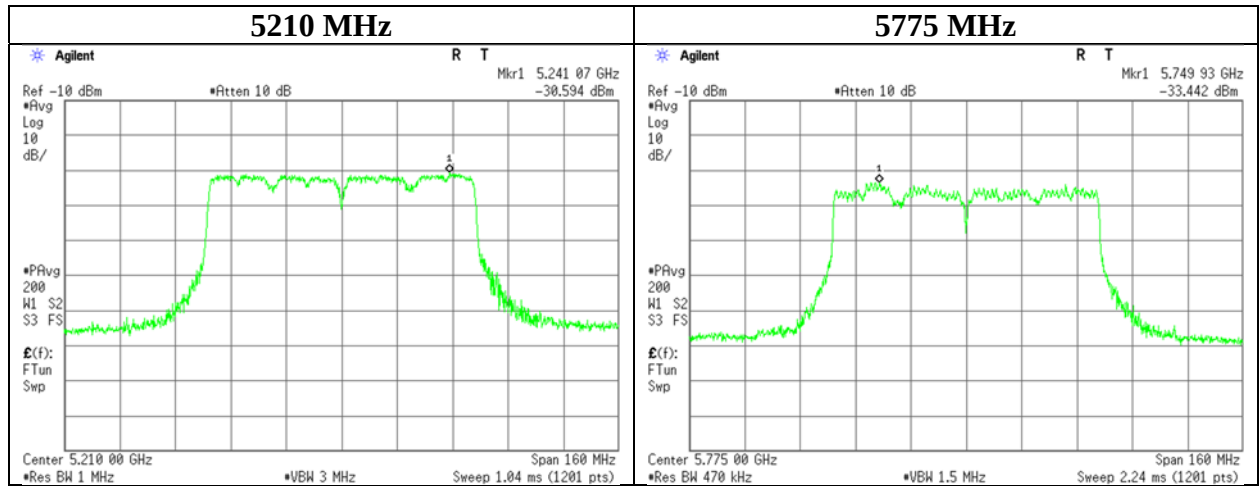

Maximum Power Spectral Density

Report No. 13828808H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 15, 2021
Temperature / Humidity 25 deg. C / 67 % RH
Engineer Takafumi Noguchi
Mode Tx 11ac-80 Antenna 2

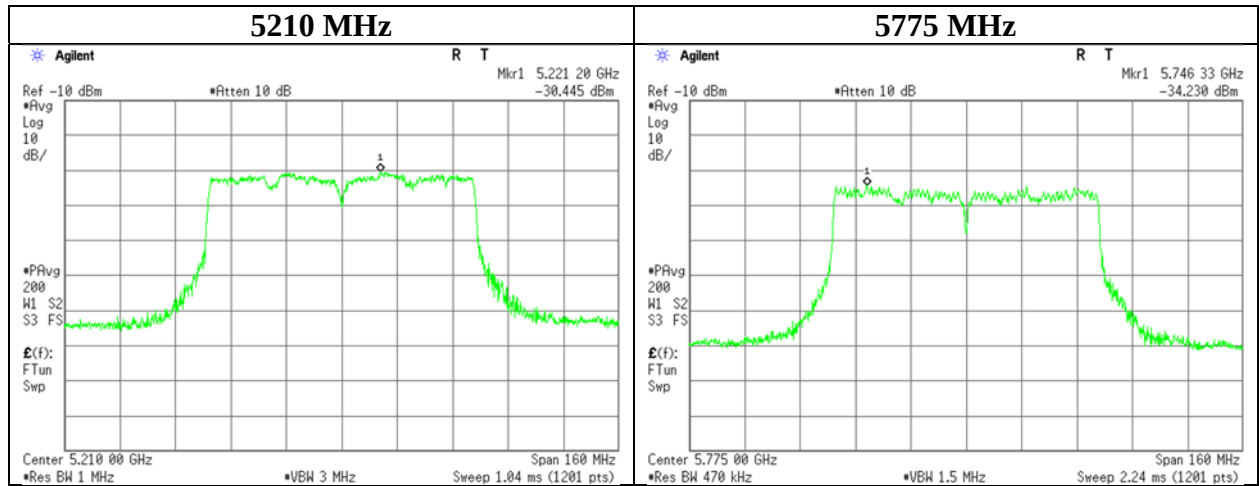

Radiated Spurious Emission

Report No.	13828808H			
Test place	Ise EMC Lab.			
Semi Anechoic Chamber	No.2	No.2	No.2	No.2
Date	June 13, 2021	June 14, 2021	June 15, 2021	June 16, 2021
Temperature / Humidity	21 deg. C / 57 % RH	21 deg. C / 76 % RH	21 deg. C / 73 % RH	23 deg. C / 70 % RH
Engineer	Junya Okuno	Hiroyuki Furutaka	Hiroyuki Furutaka	Junki Nagatomi
	(18 GHz - 40 GHz)	(1 GHz - 10 GHz)	(10 GHz - 18 GHz)	(Below 1 GHz)
Mode	Tx 11a 5180 MHz			

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	88.102	QP	24.0	7.8	7.4	28.4	-	10.8	43.5	32.7	
Hori.	100.878	QP	22.8	10.3	7.5	28.3	-	12.2	43.5	31.3	
Hori.	130.286	QP	22.4	13.6	7.7	28.2	-	15.5	43.5	28.1	
Hori.	178.988	QP	26.3	15.8	8.1	28.0	-	22.2	43.5	21.4	
Hori.	424.871	QP	27.2	16.2	9.6	28.6	-	24.3	46.0	21.7	
Hori.	914.528	QP	28.3	22.1	11.4	28.7	-	33.0	46.0	13.0	
Hori.	1580.000	PK	54.0	25.3	3.4	35.1	-	47.5	73.9	26.4	
Hori.	5150.000	PK	47.5	31.9	5.1	33.7	-	50.8	73.9	23.1	
Hori.	10000.000	PK	48.9	39.3	-2.5	34.3	-	51.4	68.2	16.8	
Hori.	10360.000	PK	44.6	40.2	-2.3	34.0	-	48.5	68.2	19.7	Floor noise
Hori.	15540.000	PK	43.5	37.4	-0.5	32.9	-	47.5	73.9	26.4	Floor noise
Hori.	1580.000	AV	48.4	25.3	3.4	35.1	-	41.9	53.9	12.0	
Hori.	5150.000	AV	37.7	31.9	5.1	33.7	2.0	43.0	53.9	10.9	*1)
Hori.	15540.000	AV	35.2	37.4	-0.5	32.9	-	39.2	53.9	14.7	Floor noise
Vert.	88.276	QP	26.6	7.8	7.4	28.4	-	13.5	43.5	30.1	
Vert.	101.070	QP	23.1	10.3	7.5	28.3	-	12.6	43.5	30.9	
Vert.	129.880	QP	22.8	13.6	7.7	28.2	-	15.9	43.5	27.7	
Vert.	178.372	QP	23.1	15.8	8.1	28.0	-	18.9	43.5	24.6	
Vert.	424.804	QP	26.3	16.2	9.6	28.6	-	23.4	46.0	22.6	
Vert.	914.514	QP	31.9	22.1	11.4	28.7	-	36.6	46.0	9.4	
Vert.	1580.000	PK	54.4	25.3	3.4	35.1	-	48.0	73.9	25.9	
Vert.	5150.000	PK	45.5	31.9	5.1	33.7	-	48.8	73.9	25.1	
Vert.	10000.000	PK	50.2	39.3	-2.5	34.3	-	52.7	68.2	15.5	
Vert.	10360.000	PK	43.7	40.2	-2.3	34.0	-	47.6	68.2	20.6	Floor noise
Vert.	15540.000	PK	43.7	37.4	-0.5	32.9	-	47.6	73.9	26.3	Floor noise
Vert.	1580.000	AV	49.7	25.3	3.4	35.1	-	43.3	53.9	10.6	
Vert.	5150.000	AV	36.0	31.9	5.1	33.7	2.0	41.4	53.9	12.5	*1)
Vert.	15540.000	AV	35.8	37.4	-0.5	32.9	-	39.7	53.9	14.2	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.55\text{ m} / 3.0\text{ m}) = 1.47\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

*1) Not Out of Band emission(Leakage Power)

Radiated Spurious Emission

Report No.	13828808H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	June 14, 2021
Temperature / Humidity	21 deg. C / 76 % RH
Engineer	Hiroyuki Furutaka
	(1 GHz - 10 GHz)
Mode	Tx 11a 5180 MHz

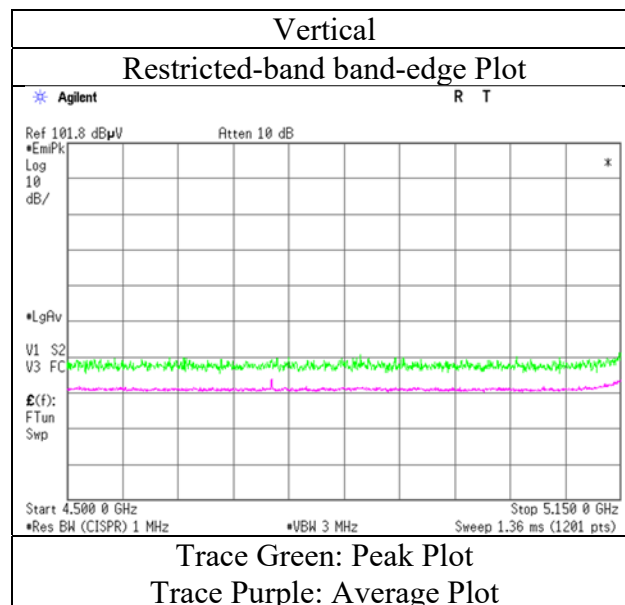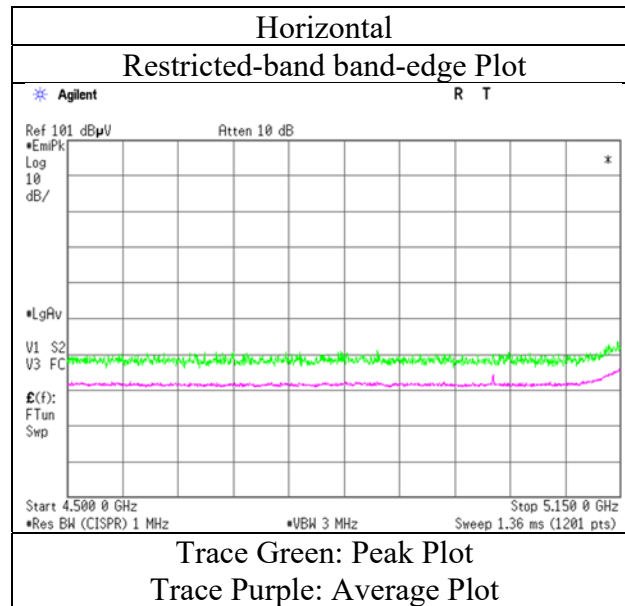

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No.	13828808H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.2	No.2	No.2
Date	June 13, 2021	June 14, 2021	June 15, 2021
Temperature / Humidity	21 deg. C / 57 % RH	21 deg. C / 76 % RH	21 deg. C / 73 % RH
Engineer	Junya Okuno	Hiroyuki Furutaka	Hiroyuki Furutaka
	(18 GHz - 40 GHz)	(1 GHz - 10 GHz)	(10 GHz - 18 GHz)
Mode	Tx 11a 5220 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	1580.000	PK	52.6	25.3	3.4	35.1	-	46.2	73.9	27.7	
Hori.	10000.000	PK	49.2	39.3	-2.5	34.3	-	51.7	68.2	16.5	
Hori.	10440.000	PK	44.4	40.3	-2.3	34.0	-	48.4	68.2	19.9	Floor noise
Hori.	15660.000	PK	44.3	37.4	-0.4	33.0	-	48.2	73.9	25.7	Floor noise
Hori.	1580.000	AV	48.1	25.3	3.4	35.1	-	41.7	53.9	12.2	
Hori.	15660.000	AV	35.5	37.4	-0.4	33.0	-	39.5	53.9	14.4	Floor noise
Vert.	1580.000	PK	54.0	25.3	3.4	35.1	-	47.6	73.9	26.3	
Vert.	10000.000	PK	50.5	39.3	-2.5	34.3	-	53.1	68.2	15.2	
Vert.	10440.000	PK	44.0	40.3	-2.3	34.0	-	48.0	68.2	20.2	Floor noise
Vert.	15660.000	PK	44.2	37.4	-0.4	33.0	-	48.1	73.9	25.8	Floor noise
Vert.	1580.000	AV	50.7	25.3	3.4	35.1	-	44.3	53.9	9.6	
Vert.	15660.000	AV	35.5	37.4	-0.4	33.0	-	39.5	53.9	14.5	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.55\text{ m} / 3.0\text{ m}) = 1.47\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission

Report No.	13828808H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.2	No.2	No.2
Date	June 13, 2021	June 14, 2021	June 15, 2021
Temperature / Humidity	21 deg. C / 57 % RH	21 deg. C / 76 % RH	21 deg. C / 73 % RH
Engineer	Junya Okuno	Hiroyuki Furutaka	Hiroyuki Furutaka
	(18 GHz - 40 GHz)	(1 GHz - 10 GHz)	(10 GHz - 18 GHz)
Mode	Tx 11a 5240 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	1580.000	PK	51.9	25.3	3.4	35.1	-	45.5	73.9	28.4	
Hori.	5350.000	PK	42.2	31.5	5.2	33.6	-	45.4	73.9	28.5	
Hori.	10000.000	PK	50.8	39.3	-2.5	34.3	-	53.3	68.2	14.9	
Hori.	10480.000	PK	45.8	40.1	-2.3	34.0	-	49.7	68.2	18.5	Floor noise
Hori.	15720.000	PK	43.5	37.0	-0.4	33.0	-	47.0	73.9	26.9	Floor noise
Hori.	1580.000	AV	47.7	25.3	3.4	35.1	-	41.3	53.9	12.6	
Hori.	5350.000	AV	33.8	31.5	5.2	33.6	2.0	38.9	53.9	15.0	*1)
Hori.	15720.000	AV	35.7	37.0	-0.4	33.0	-	39.2	53.9	14.7	Floor noise
Vert.	1580.000	PK	54.3	25.3	3.4	35.1	-	47.9	73.9	26.0	
Vert.	5350.000	PK	42.4	31.5	5.2	33.6	-	45.5	73.9	28.4	
Vert.	10000.000	PK	49.5	39.3	-2.5	34.3	-	52.1	68.2	16.1	
Vert.	10480.000	PK	43.0	40.1	-2.3	34.0	-	46.9	68.2	21.3	Floor noise
Vert.	15720.000	PK	43.9	37.0	-0.4	33.0	-	47.4	73.9	26.5	Floor noise
Vert.	1580.000	AV	50.9	25.3	3.4	35.1	-	44.5	53.9	9.4	
Vert.	5350.000	AV	33.7	31.5	5.2	33.6	2.0	38.9	53.9	15.0	*1)
Vert.	15720.000	AV	35.8	37.0	-0.4	33.0	-	39.3	53.9	14.6	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.55 m / 3.0 m) = 1.47 dB
10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

*1) Not Out of Band emission(Leakage Power)

Radiated Spurious Emission

Report No.	13828808H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	June 14, 2021
Temperature / Humidity	21 deg. C / 76 % RH
Engineer	Hiroyuki Furutaka
Mode	Tx 11a 5240 MHz

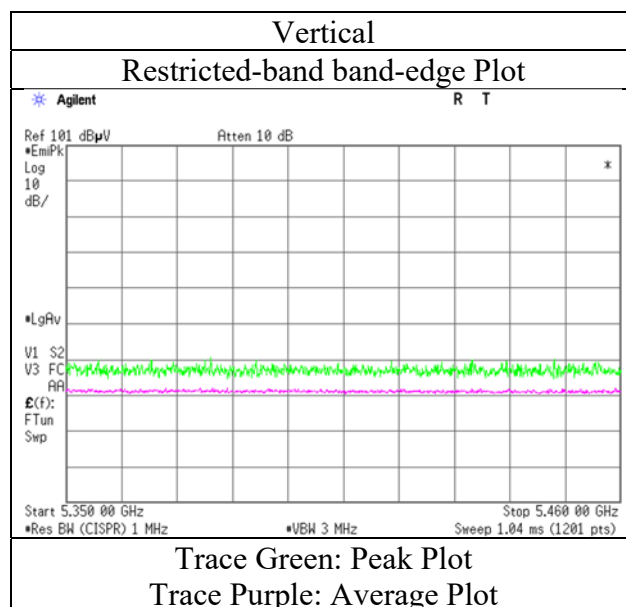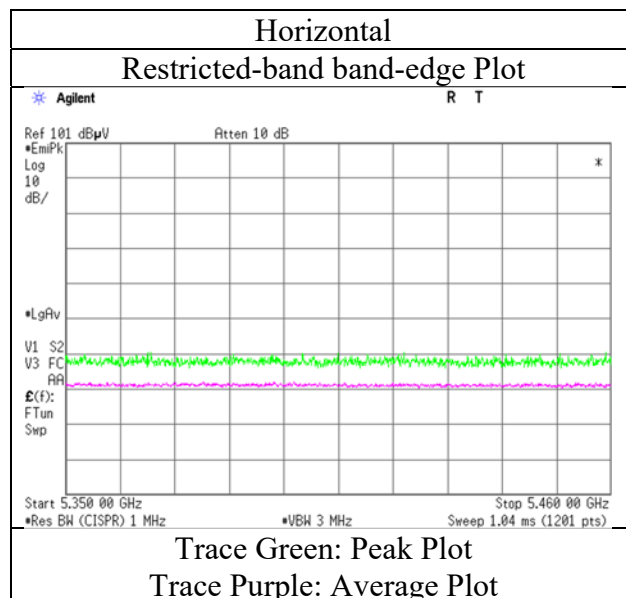

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No.	13828808H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.2	No.2	No.2
Date	June 13, 2021	June 14, 2021	June 15, 2021
Temperature / Humidity	21 deg. C / 57 % RH	21 deg. C / 76 % RH	21 deg. C / 73 % RH
Engineer	Junya Okuno	Hiroyuki Furutaka	Hiroyuki Furutaka
	(18 GHz - 40 GHz)	(1 GHz - 10 GHz)	(10 GHz - 18 GHz)
Mode	Tx 11a 5745 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	1580.000	PK	51.9	25.3	3.4	35.1	-	45.5	73.9	28.4	
Hori.	5650.000	PK	42.4	31.8	5.3	33.5	-	46.0	68.2	22.2	
Hori.	5700.000	PK	43.1	31.8	5.4	33.5	-	46.8	105.2	58.4	
Hori.	5720.000	PK	44.0	31.9	5.4	33.5	-	47.6	110.8	63.2	
Hori.	5725.000	PK	44.6	31.9	5.4	33.5	-	48.3	122.2	73.9	
Hori.	10000.000	PK	50.9	39.3	-2.8	34.3	-	53.1	68.2	15.2	
Hori.	11490.000	PK	43.2	39.9	-2.2	33.5	-	47.4	73.9	26.5	Floor noise
Hori.	17235.000	PK	43.1	41.8	-0.6	32.4	-	51.8	68.2	16.4	Floor noise
Hori.	1580.000	AV	47.9	25.3	3.4	35.1	-	41.5	53.9	12.4	
Hori.	11490.000	AV	35.3	39.9	-2.2	33.5	-	39.5	53.9	14.4	Floor noise
Vert.	1580.000	PK	54.5	25.3	3.4	35.1	-	48.1	73.9	25.8	
Vert.	5650.000	PK	41.8	31.8	5.3	33.5	-	45.5	68.2	22.8	
Vert.	5700.000	PK	42.7	31.8	5.4	33.5	-	46.4	105.2	58.8	
Vert.	5720.000	PK	43.6	31.9	5.4	33.5	-	47.3	110.8	63.5	
Vert.	5725.000	PK	44.0	31.9	5.4	33.5	-	47.7	122.2	74.5	
Vert.	10000.000	PK	50.1	39.3	-2.8	34.3	-	52.3	68.2	16.0	
Vert.	11490.000	PK	42.7	39.9	-2.2	33.5	-	46.9	73.9	27.0	Floor noise
Vert.	17235.000	PK	43.7	41.8	-0.6	32.4	-	52.5	68.2	15.8	Floor noise
Vert.	1580.000	AV	51.1	25.3	3.4	35.1	-	44.7	53.9	9.2	
Vert.	11490.000	AV	34.5	39.9	-2.2	33.5	-	38.8	53.9	15.2	Floor noise



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.55\text{ m} / 3.0\text{ m}) = 1.47\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission

Report No.	13828808H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	June 14, 2021
Temperature / Humidity	21 deg. C / 76 % RH
Engineer	Hiroyuki Furutaka
Mode	Tx 11a 5745 MHz

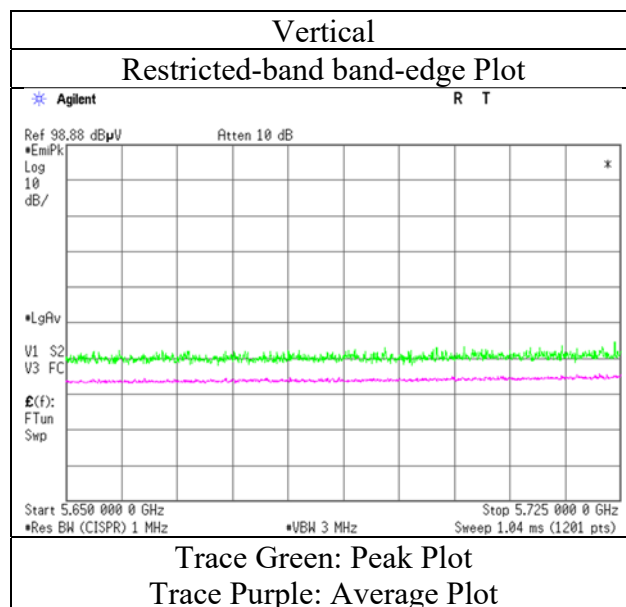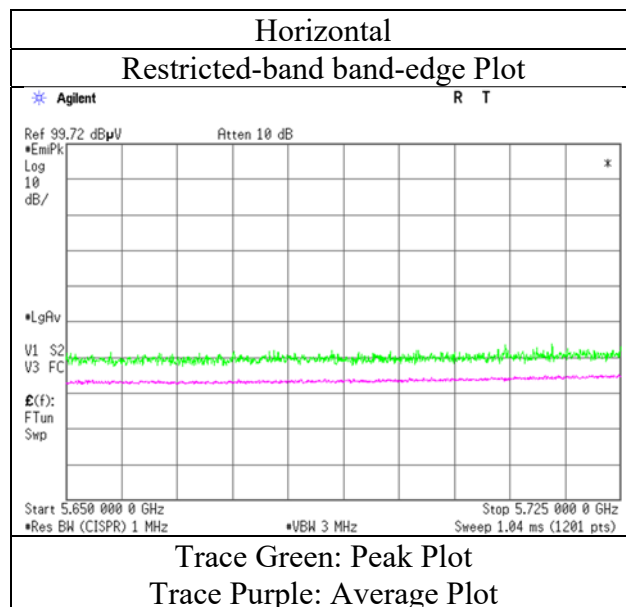

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No.	13828808H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.2	No.2	No.2
Date	June 13, 2021	June 14, 2021	June 15, 2021
Temperature / Humidity	21 deg. C / 57 % RH	21 deg. C / 76 % RH	21 deg. C / 73 % RH
Engineer	Junya Okuno	Hiroyuki Furutaka	Hiroyuki Furutaka
	(18 GHz - 40 GHz)	(1 GHz - 10 GHz)	(10 GHz - 18 GHz)
Mode	Tx 11a 5785 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	1580.000	PK	53.6	25.3	3.4	35.1	-	47.2	73.9	26.7	
Hori.	10000.000	PK	50.8	39.3	-2.8	34.3	-	52.9	68.2	15.3	
Hori.	11570.000	PK	42.8	39.7	-2.1	33.4	-	46.9	73.9	27.0	Floor noise
Hori.	17355.000	PK	42.7	43.0	-0.6	32.4	-	52.8	68.2	15.4	Floor noise
Hori.	1580.000	AV	47.7	25.3	3.4	35.1	-	41.3	53.9	12.6	
Hori.	11570.000	AV	35.1	39.7	-2.1	33.4	-	39.2	53.9	14.7	Floor noise
Vert.	1580.000	PK	54.7	25.3	3.4	35.1	-	48.3	73.9	25.6	
Vert.	10000.000	PK	49.2	39.3	-2.8	34.3	-	51.4	68.2	16.8	
Vert.	11570.000	PK	42.9	39.7	-2.1	33.4	-	46.9	73.9	27.0	Floor noise
Vert.	17355.000	PK	43.3	43.0	-0.6	32.4	-	53.3	68.2	14.9	Floor noise
Vert.	1580.000	AV	50.8	25.3	3.4	35.1	-	44.4	53.9	9.5	
Vert.	11570.000	AV	34.3	39.7	-2.1	33.4	-	38.4	53.9	15.5	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.55\text{ m} / 3.0\text{ m}) = 1.47\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission

Report No.	13828808H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.2	No.2	No.2
Date	June 13, 2021	June 14, 2021	June 15, 2021
Temperature / Humidity	21 deg. C / 57 % RH	21 deg. C / 76 % RH	21 deg. C / 73 % RH
Engineer	Junya Okuno	Hiroyuki Furutaka	Hiroyuki Furutaka
	(18 GHz - 40 GHz)	(1 GHz - 10 GHz)	(10 GHz - 18 GHz)
Mode	Tx 11a 5825 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	1580.000	PK	53.9	25.3	3.4	35.1	-	47.4	73.9	26.5	
Hori.	5850.000	PK	45.4	32.3	5.4	33.5	-	49.5	122.2	72.7	
Hori.	5855.000	PK	44.4	32.3	5.4	33.5	-	48.5	110.8	62.3	
Hori.	5875.000	PK	43.4	32.3	5.4	33.5	-	47.6	105.2	57.7	
Hori.	5925.000	PK	42.0	32.4	5.4	33.5	-	46.3	68.2	21.9	
Hori.	10000.000	PK	50.4	39.3	-2.8	34.3	-	52.6	68.2	15.7	
Hori.	11650.000	PK	43.6	39.4	-2.1	33.4	-	47.6	73.9	26.4	Floor noise
Hori.	17475.000	PK	43.7	44.1	-0.5	32.4	-	54.8	68.2	13.4	Floor noise
Hori.	1580.000	AV	47.7	25.3	3.4	35.1	-	41.3	53.9	12.7	
Hori.	11650.000	AV	35.1	39.4	-2.1	33.4	-	39.0	53.9	14.9	Floor noise
Vert.	1580.000	PK	56.3	25.3	3.4	35.1	-	49.9	73.9	24.0	
Vert.	5850.000	PK	44.4	32.3	5.4	33.5	-	48.5	122.2	73.7	
Vert.	5855.000	PK	44.6	32.3	5.4	33.5	-	48.7	110.8	62.1	
Vert.	5875.000	PK	42.5	32.3	5.4	33.5	-	46.7	105.2	58.6	
Vert.	5925.000	PK	42.7	32.4	5.4	33.5	-	47.0	68.2	21.2	
Vert.	10000.000	PK	49.6	39.3	-2.8	34.3	-	51.8	68.2	16.4	
Vert.	11650.000	PK	44.3	39.4	-2.1	33.4	-	48.2	73.9	25.7	Floor noise
Vert.	17475.000	PK	43.7	44.1	-0.5	32.4	-	54.9	68.2	13.3	Floor noise
Vert.	1580.000	AV	51.0	25.3	3.4	35.1	-	44.6	53.9	9.3	
Vert.	11650.000	AV	35.3	39.4	-2.1	33.4	-	39.3	53.9	14.6	Floor noise



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.55 m / 3.0 m) = 1.47 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Report No.	13828808H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	June 14, 2021
Temperature / Humidity	21 deg. C / 76 % RH
Engineer	Hiroyuki Furutaka
Mode	Tx 11a 5825 MHz

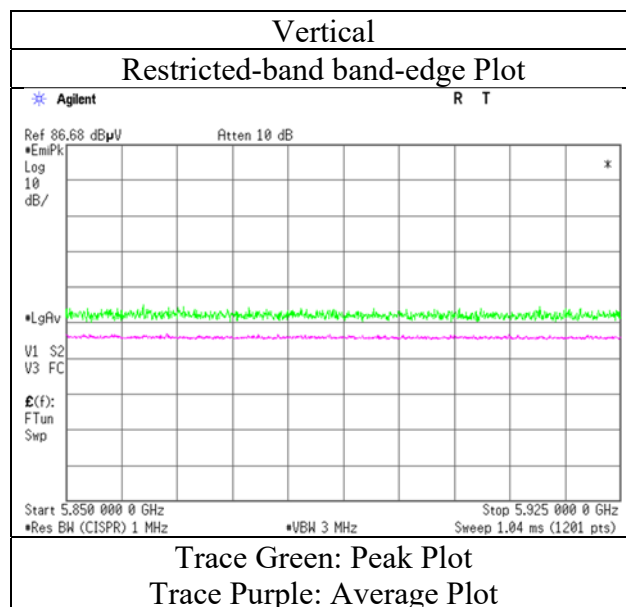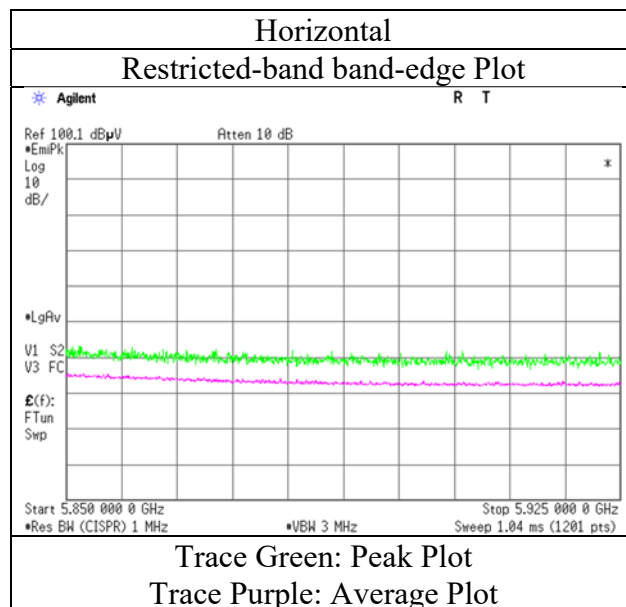

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No.	13828808H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.2	No.2	No.2
Date	June 13, 2021	June 14, 2021	June 15, 2021
Temperature / Humidity	21 deg. C / 57 % RH	21 deg. C / 76 % RH	21 deg. C / 73 % RH
Engineer	Junya Okuno	Hiroyuki Furutaka	Hiroyuki Furutaka
	(18 GHz - 40 GHz)	(1 GHz - 10 GHz)	(10 GHz - 18 GHz)
Mode	Tx 11ac-20 5180 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	1580.000	PK	53.3	25.3	3.4	35.1	-	46.9	73.9	27.0	
Hori.	5150.000	PK	45.6	31.9	5.1	33.7	-	48.9	73.9	25.0	
Hori.	10000.000	PK	50.8	39.3	-2.8	34.3	-	53.0	68.2	15.2	
Hori.	10360.000	PK	43.9	40.2	-2.7	34.0	-	47.4	68.2	20.8	Floor noise
Hori.	15540.000	PK	43.8	37.4	-1.1	32.9	-	47.1	73.9	26.8	Floor noise
Hori.	1580.000	AV	48.1	25.3	3.4	35.1	-	41.7	53.9	12.2	
Hori.	5150.000	AV	36.3	31.9	5.1	33.7	2.6	42.2	53.9	11.7	*1)
Hori.	15540.000	AV	35.3	37.4	-1.1	32.9	-	38.6	53.9	15.3	Floor noise
Vert.	1580.000	PK	58.9	25.3	3.4	35.1	-	52.5	73.9	21.4	
Vert.	5150.000	PK	45.3	31.9	5.1	33.7	-	48.6	73.9	25.3	
Vert.	10000.000	PK	50.1	39.3	-2.8	34.3	-	52.3	68.2	15.9	
Vert.	10360.000	PK	44.0	40.2	-2.7	34.0	-	47.4	68.2	20.8	Floor noise
Vert.	15540.000	PK	43.3	37.4	-1.1	32.9	-	46.6	73.9	27.3	Floor noise
Vert.	1580.000	AV	50.9	25.3	3.4	35.1	-	44.5	53.9	9.5	
Vert.	5150.000	AV	36.4	31.9	5.1	33.7	2.6	42.3	53.9	11.6	*1)
Vert.	15540.000	AV	35.5	37.4	-1.1	32.9	-	38.8	53.9	15.1	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.55 m / 3.0 m) = 1.47 dB
10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

*1) Not Out of Band emission(Leakage Power)

Radiated Spurious Emission

Report No.	13828808H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	June 14, 2021
Temperature / Humidity	21 deg. C / 76 % RH
Engineer	Hiroyuki Furutaka
	(1 GHz - 10 GHz)
Mode	Tx 11ac-20 5180 MHz

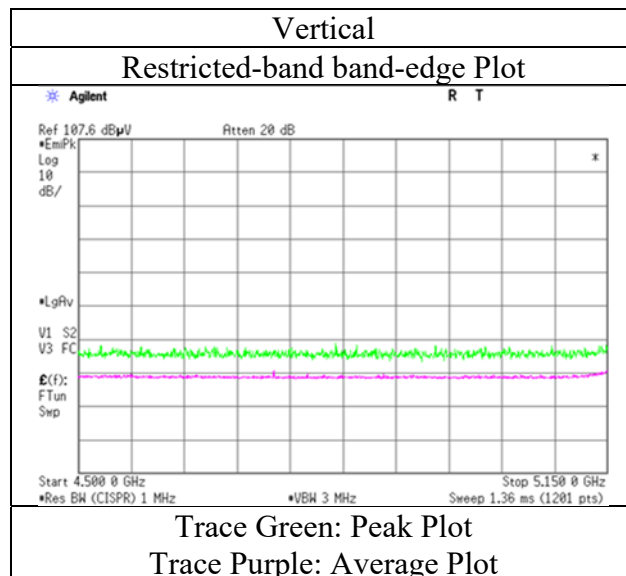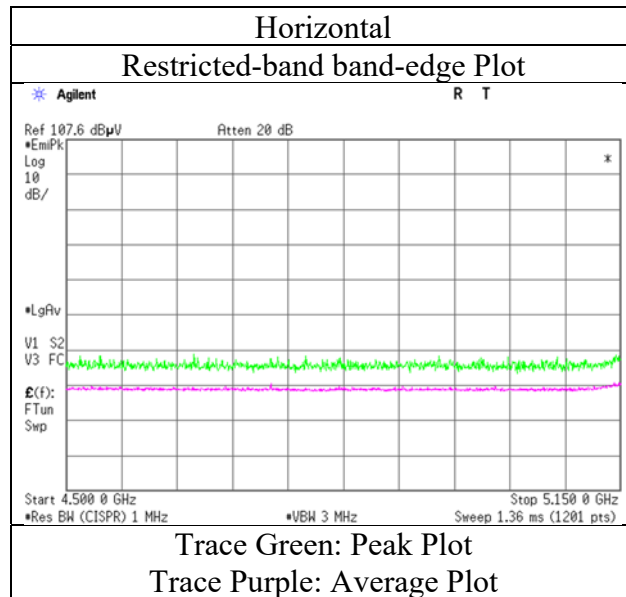

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No.	13828808H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.2	No.2	No.2
Date	June 13, 2021	June 14, 2021	June 15, 2021
Temperature / Humidity	21 deg. C / 57 % RH	21 deg. C / 76 % RH	21 deg. C / 73 % RH
Engineer	Junya Okuno	Hiroyuki Furutaka	Hiroyuki Furutaka
	(18 GHz - 40 GHz)	(1 GHz - 10 GHz)	(10 GHz - 18 GHz)
Mode	Tx 11ac-20 5220 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	1580.000	PK	53.2	25.3	3.4	35.1	-	46.8	73.9	27.1	
Hori.	10000.000	PK	50.5	39.3	-2.8	34.3	-	52.6	68.2	15.6	
Hori.	10440.000	PK	43.2	40.3	-2.7	34.0	-	46.7	68.2	21.5	Floor noise
Hori.	15660.000	PK	43.7	37.4	-1.1	33.0	-	47.0	73.9	26.9	Floor noise
Hori.	1580.000	AV	48.1	25.3	3.4	35.1	-	41.7	53.9	12.2	
Hori.	15660.000	AV	35.5	37.4	-1.1	33.0	-	38.7	53.9	15.2	Floor noise
Vert.	1580.000	PK	56.3	25.3	3.4	35.1	-	49.9	73.9	24.0	
Vert.	10000.000	PK	50.1	39.3	-2.8	34.3	-	52.3	68.2	15.9	
Vert.	10440.000	PK	43.8	40.3	-2.7	34.0	-	47.4	68.2	20.8	Floor noise
Vert.	15660.000	PK	43.4	37.4	-1.1	33.0	-	46.7	73.9	27.2	Floor noise
Vert.	1580.000	AV	50.9	25.3	3.4	35.1	-	44.5	53.9	9.4	
Vert.	15660.000	AV	35.6	37.4	-1.1	33.0	-	38.8	53.9	15.1	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.55\text{ m} / 3.0\text{ m}) = 1.47\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission

Report No.	13828808H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.2	No.2	No.2
Date	June 13, 2021	June 14, 2021	June 15, 2021
Temperature / Humidity	21 deg. C / 57 % RH	21 deg. C / 76 % RH	21 deg. C / 73 % RH
Engineer	Junya Okuno	Hiroyuki Furutaka	Hiroyuki Furutaka
	(18 GHz - 40 GHz)	(1 GHz - 10 GHz)	(10 GHz - 18 GHz)
Mode	Tx 11ac-20 5240 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	1580.000	PK	53.9	25.3	3.4	35.1	-	47.5	73.9	26.4	
Hori.	5350.000	PK	42.1	31.5	5.2	33.6	-	45.2	73.9	28.7	
Hori.	10000.000	PK	50.8	39.3	-2.8	34.3	-	53.0	68.2	15.2	
Hori.	10480.000	PK	43.4	40.1	-2.7	34.0	-	46.9	68.2	21.3	Floor noise
Hori.	15720.000	PK	44.2	37.0	-1.1	33.0	-	47.0	73.9	27.0	Floor noise
Hori.	1580.000	AV	47.7	25.3	3.4	35.1	-	41.3	53.9	12.6	
Hori.	5350.000	AV	33.1	31.5	5.2	33.6	2.6	38.8	53.9	15.1	*1)
Hori.	15720.000	AV	35.6	37.0	-1.1	33.0	-	38.4	53.9	15.5	Floor noise
Vert.	1580.000	PK	57.1	25.3	3.4	35.1	-	50.7	73.9	23.2	
Vert.	5350.000	PK	42.0	31.5	5.2	33.6	-	45.1	73.9	28.8	
Vert.	10000.000	PK	49.8	39.3	-2.8	34.3	-	52.0	68.2	16.3	
Vert.	10480.000	PK	43.4	40.1	-2.7	34.0	-	46.9	68.2	21.4	Floor noise
Vert.	15720.000	PK	43.8	37.0	-1.1	33.0	-	46.6	73.9	27.3	Floor noise
Vert.	1580.000	AV	50.8	25.3	3.4	35.1	-	44.4	53.9	9.5	
Vert.	5350.000	AV	33.1	31.5	5.2	33.6	2.6	38.8	53.9	15.1	*1)
Vert.	15720.000	AV	36.0	37.0	-1.1	33.0	-	38.7	53.9	15.2	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.55\text{ m} / 3.0\text{ m}) = 1.47\text{ dB}$
10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

*1) Not Out of Band emission(Leakage Power)

Radiated Spurious Emission

Report No.	13828808H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	June 14, 2021
Temperature / Humidity	21 deg. C / 76 % RH
Engineer	Hiroyuki Furutaka (1 GHz - 10 GHz)
Mode	Tx 11ac-20 5240 MHz

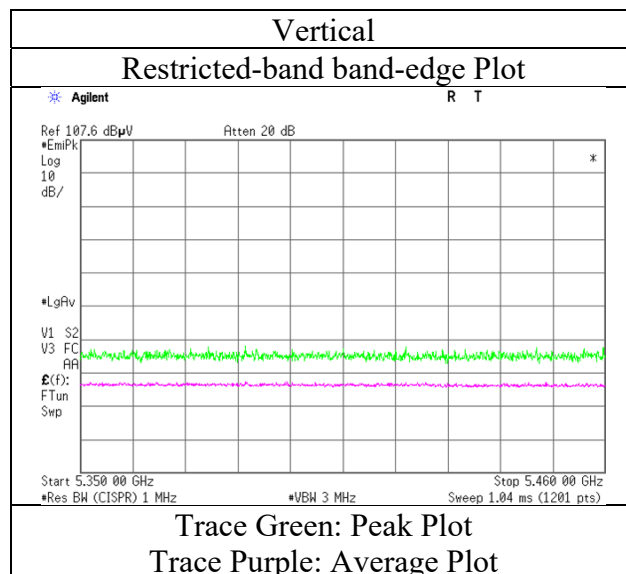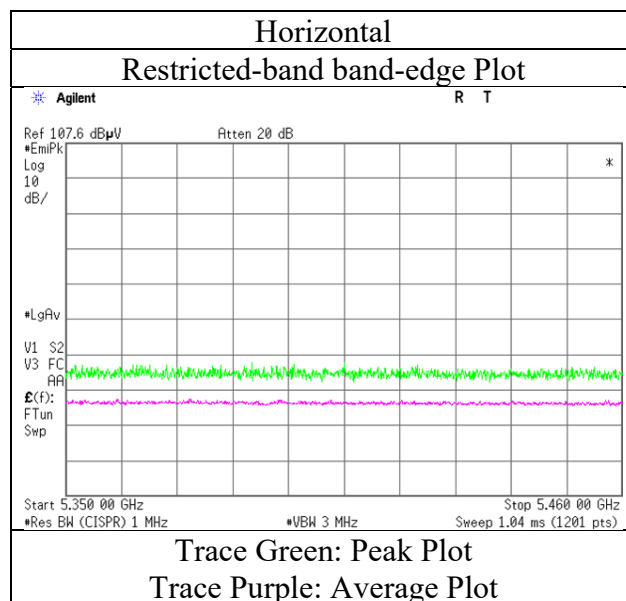

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No.	13828808H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.2	No.2	No.2
Date	June 13, 2021	June 14, 2021	June 15, 2021
Temperature / Humidity	21 deg. C / 57 % RH	25 deg. C / 62 % RH	21 deg. C / 73 % RH
Engineer	Junya Okuno	Junya Okuno	Hiroyuki Furutaka
	(18 GHz - 40 GHz)	(1 GHz - 10 GHz)	(10 GHz - 18 GHz)
Mode	Tx 11ac-20 5745 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	1580.000	PK	54.2	25.3	3.4	35.1	-	47.8	73.9	26.1	
Hori.	5650.000	PK	42.4	31.8	5.3	33.5	-	46.1	68.2	22.2	
Hori.	5700.000	PK	42.7	31.8	5.4	33.5	-	46.3	105.2	58.9	
Hori.	5720.000	PK	43.4	31.9	5.4	33.5	-	47.1	110.8	63.8	
Hori.	5725.000	PK	45.3	31.9	5.4	33.5	-	49.0	122.2	73.2	
Hori.	10000.000	PK	50.1	39.3	-2.8	34.3	-	52.3	68.2	15.9	
Hori.	11490.000	PK	43.9	39.9	-2.2	33.5	-	48.2	73.9	25.7	Floor noise
Hori.	17235.000	PK	43.9	41.8	-0.6	32.4	-	52.6	68.2	15.6	Floor noise
Hori.	1580.000	AV	47.5	25.3	3.4	35.1	-	41.1	53.9	12.8	
Hori.	11490.000	AV	35.0	39.9	-2.2	33.5	-	39.2	53.9	14.7	Floor noise
Vert.	1580.000	PK	54.5	25.3	3.4	35.1	-	48.1	73.9	25.8	
Vert.	5650.000	PK	42.1	31.8	5.3	33.5	-	45.7	68.2	22.5	
Vert.	5700.000	PK	42.1	31.8	5.4	33.5	-	45.8	105.2	59.4	
Vert.	5720.000	PK	43.2	31.9	5.4	33.5	-	46.8	110.8	64.0	
Vert.	5725.000	PK	44.7	31.9	5.4	33.5	-	48.4	122.2	73.8	
Vert.	10000.000	PK	49.8	39.3	-2.8	34.3	-	51.9	68.2	16.3	
Vert.	11490.000	PK	43.5	39.9	-2.2	33.5	-	47.7	73.9	26.2	Floor noise
Vert.	17235.000	PK	43.1	41.8	-0.6	32.4	-	51.8	68.2	16.4	Floor noise
Vert.	1580.000	AV	51.0	25.3	3.4	35.1	-	44.6	53.9	9.4	
Vert.	11490.000	AV	34.4	39.9	-2.2	33.5	-	38.7	53.9	15.2	Floor noise



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.55 m / 3.0 m) = 1.47 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Report No.	13828808H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	June 14, 2021
Temperature / Humidity	25 deg. C / 62 % RH
Engineer	Junya Okuno
Mode	Tx 11ac-20 5745 MHz

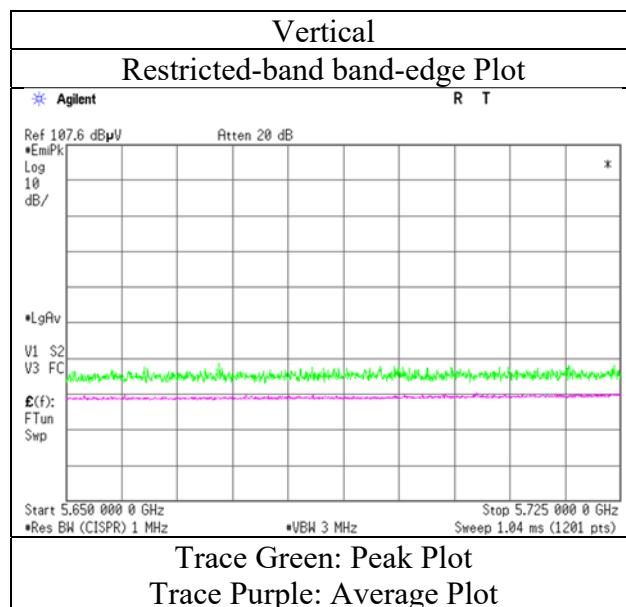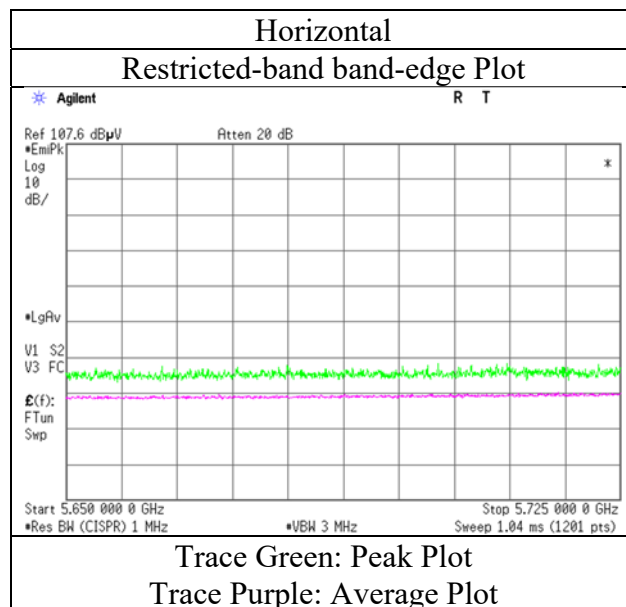

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No.	13828808H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.2	No.2	No.2
Date	June 13, 2021	June 14, 2021	June 15, 2021
Temperature / Humidity	21 deg. C / 57 % RH	25 deg. C / 62 % RH	21 deg. C / 73 % RH
Engineer	Junya Okuno	Junya Okuno	Hiroyuki Furutaka
	(18 GHz - 40 GHz)	(1 GHz - 10 GHz)	(10 GHz - 18 GHz)
Mode	Tx 11ac-20 5785 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	1580.000	PK	54.4	25.3	3.4	35.1	-	48.0	73.9	25.9	
Hori.	10000.000	PK	51.1	39.3	-2.8	34.3	-	53.3	68.2	14.9	
Hori.	11570.000	PK	43.4	39.7	-2.1	33.4	-	47.4	73.9	26.5	Floor noise
Hori.	17355.000	PK	43.2	43.0	-0.6	32.4	-	53.2	68.2	15.0	Floor noise
Hori.	1580.000	AV	47.3	25.3	3.4	35.1	-	40.9	53.9	13.0	
Hori.	11570.000	AV	35.0	39.7	-2.1	33.4	-	39.1	53.9	14.8	Floor noise
Vert.	1580.000	PK	54.6	25.3	3.4	35.1	-	48.1	73.9	25.8	
Vert.	10000.000	PK	50.3	39.3	-2.8	34.3	-	52.5	68.2	15.8	
Vert.	11570.000	PK	43.3	39.7	-2.1	33.4	-	47.3	73.9	26.6	Floor noise
Vert.	17355.000	PK	43.4	43.0	-0.6	32.4	-	53.4	68.2	14.8	Floor noise
Vert.	1580.000	AV	50.8	25.3	3.4	35.1	-	44.4	53.9	9.5	
Vert.	11570.000	AV	34.9	39.7	-2.1	33.4	-	39.0	53.9	14.9	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.55\text{ m} / 3.0\text{ m}) = 1.47\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission

Report No.	13828808H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.2	No.2	No.2
Date	June 13, 2021	June 14, 2021	June 15, 2021
Temperature / Humidity	21 deg. C / 57 % RH	25 deg. C / 62 % RH	21 deg. C / 73 % RH
Engineer	Junya Okuno	Junya Okuno	Hiroyuki Furutaka
	(18 GHz - 40 GHz)	(1 GHz - 10 GHz)	(10 GHz - 18 GHz)
Mode	Tx 11ac-20 5825 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	1580.000	PK	54.6	25.3	3.4	35.1	-	48.2	73.9	25.7	
Hori.	5850.000	PK	43.3	32.3	5.4	33.5	-	47.4	122.2	74.8	
Hori.	5855.000	PK	43.2	32.3	5.4	33.5	-	47.3	110.8	63.5	
Hori.	5875.000	PK	43.1	32.3	5.4	33.5	-	47.3	105.2	57.9	
Hori.	5925.000	PK	42.4	32.4	5.4	33.5	-	46.7	68.2	21.5	
Hori.	10000.000	PK	50.6	39.3	-2.8	34.3	-	52.8	68.2	15.5	
Hori.	11650.000	PK	44.3	39.4	-2.1	33.4	-	48.2	73.9	25.7	Floor noise
Hori.	17475.000	PK	43.4	44.1	-0.5	32.4	-	54.6	68.2	13.6	Floor noise
Hori.	1580.000	AV	47.4	25.3	3.4	35.1	-	41.0	53.9	12.9	
Hori.	11650.000	AV	35.3	39.4	-2.1	33.4	-	39.3	53.9	14.7	Floor noise
Vert.	1580.000	PK	54.9	25.3	3.4	35.1	-	48.5	73.9	25.4	
Vert.	5850.000	PK	44.0	32.3	5.4	33.5	-	48.1	122.2	74.1	
Vert.	5855.000	PK	43.1	32.3	5.4	33.5	-	47.3	110.8	63.5	
Vert.	5875.000	PK	42.4	32.3	5.4	33.5	-	46.6	105.2	58.6	
Vert.	5925.000	PK	42.2	32.4	5.4	33.5	-	46.5	68.2	21.7	
Vert.	10000.000	PK	50.0	39.3	-2.8	34.3	-	52.2	68.2	16.0	
Vert.	11650.000	PK	43.8	39.4	-2.1	33.4	-	47.7	73.9	26.2	Floor noise
Vert.	17475.000	PK	43.9	44.1	-0.5	32.4	-	55.0	68.2	13.2	Floor noise
Vert.	1580.000	AV	50.8	25.3	3.4	35.1	-	44.4	53.9	9.6	
Vert.	11650.000	AV	35.3	39.4	-2.1	33.4	-	39.2	53.9	14.7	Floor noise



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.55 m / 3.0 m) = 1.47 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Report No.	13828808H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	June 14, 2021
Temperature / Humidity	25 deg. C / 62 % RH
Engineer	Junya Okuno
Mode	Tx 11ac-20 5825 MHz

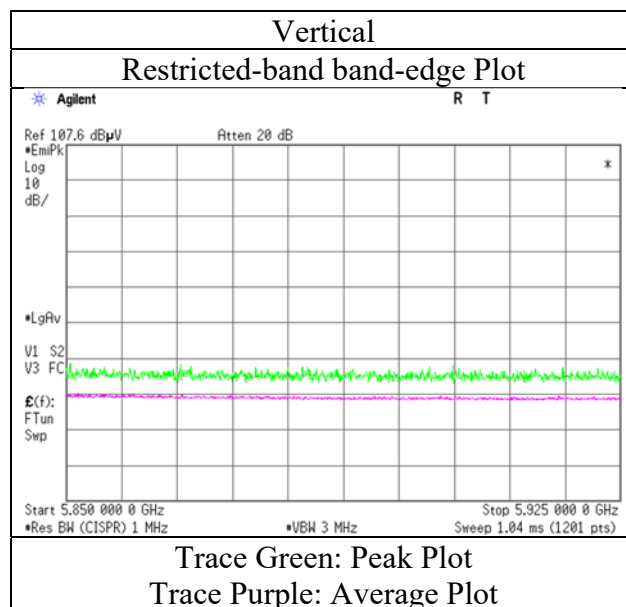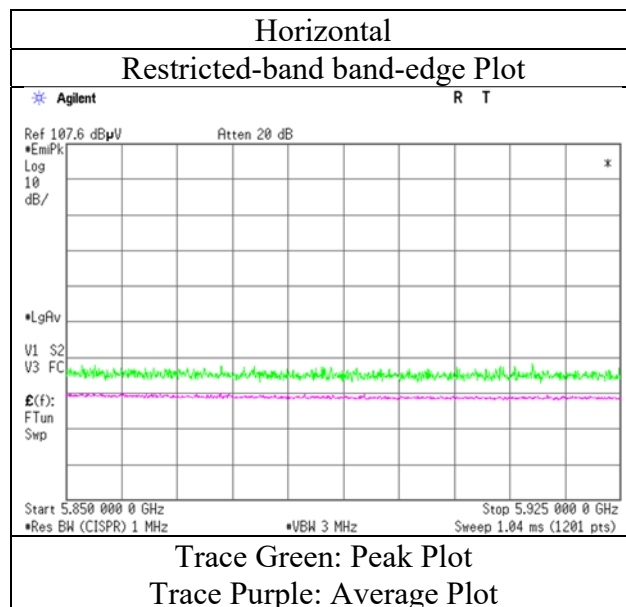

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No.	13828808H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.2	No.2	No.2
Date	June 13, 2021	June 14, 2021	June 15, 2021
Temperature / Humidity	21 deg. C / 57 % RH	25 deg. C / 62 % RH	22 deg. C / 62 % RH
Engineer	Junya Okuno	Junya Okuno	Junya Okuno
	(18 GHz - 40 GHz)	(1 GHz - 10 GHz)	(10 GHz - 18 GHz)
Mode	Tx 11ac-40 5190 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	1580.000	PK	54.4	25.3	3.4	35.1	-	48.0	73.9	25.9	
Hori.	5150.000	PK	50.5	31.9	5.1	33.7	-	53.8	73.9	20.1	
Hori.	10000.000	PK	50.4	39.3	-2.8	34.3	-	52.6	68.2	15.6	
Hori.	10380.000	PK	43.9	40.2	-2.7	34.0	-	47.4	68.2	20.9	Floor noise
Hori.	15570.000	PK	43.7	37.1	-1.1	32.9	-	46.8	73.9	27.1	Floor noise
Hori.	1580.000	AV	47.7	25.3	3.4	35.1	-	41.3	53.9	12.6	
Hori.	5150.000	AV	35.6	31.9	5.1	33.7	3.3	42.2	53.9	11.8	*1)
Hori.	15570.000	AV	35.7	37.1	-1.1	32.9	-	38.8	53.9	15.1	Floor noise
Vert.	1580.000	PK	54.8	25.3	3.4	35.1	-	48.4	73.9	25.5	
Vert.	5150.000	PK	49.7	31.9	5.1	33.7	-	53.0	73.9	20.9	
Vert.	10000.000	PK	50.2	39.3	-2.8	34.3	-	52.4	68.2	15.8	
Vert.	10380.000	PK	43.9	40.2	-2.7	34.0	-	47.3	68.2	20.9	Floor noise
Vert.	15570.000	PK	43.4	37.1	-1.1	32.9	-	46.5	73.9	27.4	Floor noise
Vert.	1580.000	AV	50.8	25.3	3.4	35.1	-	44.4	53.9	9.5	
Vert.	5150.000	AV	35.1	31.9	5.1	33.7	3.3	41.6	53.9	12.3	*1)
Vert.	15570.000	AV	35.7	37.1	-1.1	32.9	-	38.8	53.9	15.1	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.55 m / 3.0 m) = 1.47 dB
10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

*1) Not Out of Band emission(Leakage Power)

Radiated Spurious Emission

Report No.	13828808H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	June 14, 2021
Temperature / Humidity	25 deg. C / 62 % RH
Engineer	Junya Okuno
Mode	Tx 11ac-40 5190 MHz

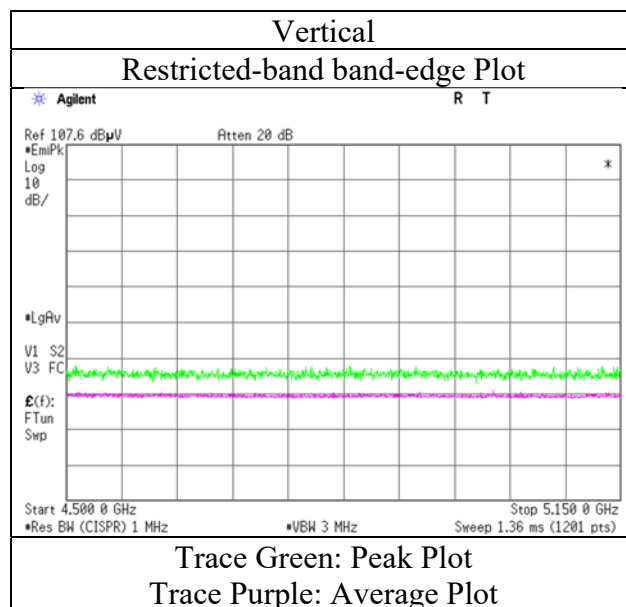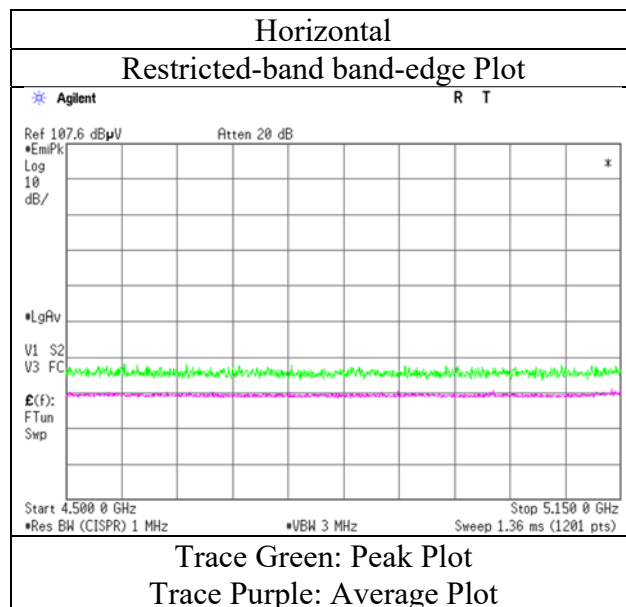

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No.	13828808H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.2	No.2	No.2
Date	June 13, 2021	June 14, 2021	June 15, 2021
Temperature / Humidity	21 deg. C / 57 % RH	25 deg. C / 62 % RH	22 deg. C / 62 % RH
Engineer	Junya Okuno	Junya Okuno	Junya Okuno
	(18 GHz - 40 GHz)	(1 GHz - 10 GHz)	(10 GHz - 18 GHz)
Mode	Tx 11ac-40 5230 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	1580.000	PK	54.6	25.3	3.4	35.1	-	48.2	73.9	25.7	
Hori.	5350.000	PK	42.2	31.5	5.2	33.6	-	45.4	73.9	28.6	
Hori.	10000.000	PK	50.5	39.3	-2.8	34.3	-	52.7	68.2	15.5	
Hori.	10460.000	PK	44.1	40.2	-2.7	34.0	-	47.6	68.2	20.6	Floor noise
Hori.	15690.000	PK	43.9	36.7	-1.1	33.0	-	46.5	73.9	27.5	Floor noise
Hori.	1580.000	AV	47.6	25.3	3.4	35.1	-	41.2	53.9	12.7	
Hori.	5350.000	AV	33.6	31.5	5.2	33.6	3.3	40.0	53.9	14.0	*1)
Hori.	15690.000	AV	35.8	36.7	-1.1	33.0	-	38.4	53.9	15.5	Floor noise
Vert.	1580.000	PK	54.9	25.3	3.4	35.1	-	48.5	73.9	25.4	
Vert.	5350.000	PK	41.5	31.5	5.2	33.6	-	44.6	73.9	29.3	
Vert.	10000.000	PK	50.3	39.3	-2.8	34.3	-	52.5	68.2	15.7	
Vert.	10460.000	PK	43.9	40.2	-2.7	34.0	-	47.5	68.2	20.8	Floor noise
Vert.	15690.000	PK	43.5	36.7	-1.1	33.0	-	46.0	73.9	27.9	Floor noise
Vert.	1580.000	AV	50.9	25.3	3.4	35.1	-	44.5	53.9	9.4	
Vert.	5350.000	AV	33.4	31.5	5.2	33.6	3.3	39.8	53.9	14.1	*1)
Vert.	15690.000	AV	35.6	36.7	-1.1	33.0	-	38.1	53.9	15.8	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.55 m / 3.0 m) = 1.47 dB
10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

*1) Not Out of Band emission(Leakage Power)

Radiated Spurious Emission

Report No.	13828808H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	June 14, 2021
Temperature / Humidity	25 deg. C / 62 % RH
Engineer	Junya Okuno
Mode	Tx 11ac-40 5230 MHz

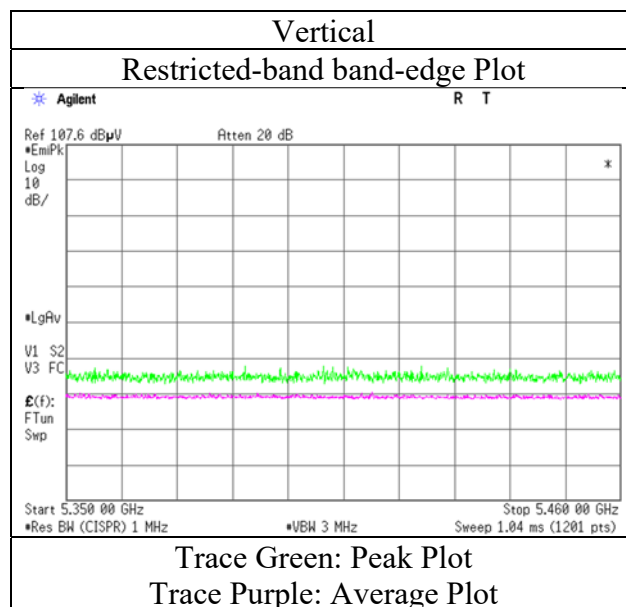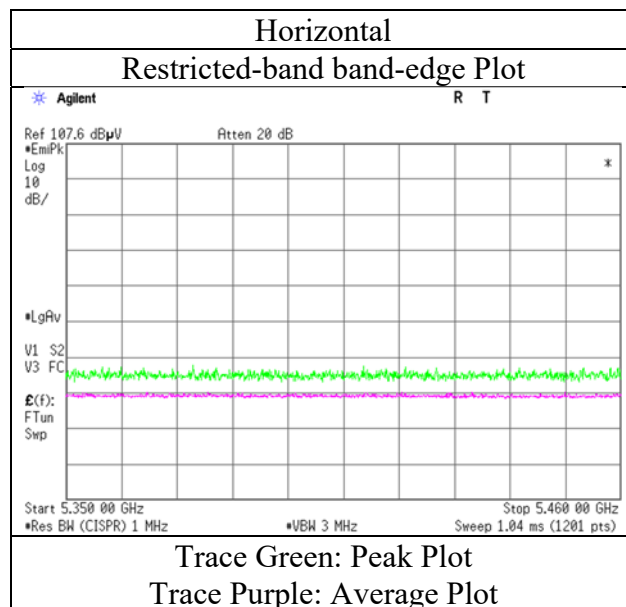

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No.	13828808H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.2	No.2	No.2
Date	June 13, 2021	June 14, 2021	June 15, 2021
Temperature / Humidity	21 deg. C / 57 % RH	25 deg. C / 62 % RH	22 deg. C / 62 % RH
Engineer	Junya Okuno	Junya Okuno	Junya Okuno
	(18 GHz - 40 GHz)	(1 GHz - 10 GHz)	(10 GHz - 18 GHz)
Mode	Tx 11ac-40 5755 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	1580.000	PK	54.6	25.3	3.4	35.1	-	48.2	73.9	25.7	
Hori.	5650.000	PK	42.2	31.8	5.3	33.5	-	45.8	68.2	22.4	
Hori.	5700.000	PK	42.8	31.8	5.4	33.5	-	46.4	105.2	58.8	
Hori.	5720.000	PK	50.6	31.9	5.4	33.5	-	54.3	110.8	56.5	
Hori.	5725.000	PK	52.3	31.9	5.4	33.5	-	56.0	122.2	66.2	
Hori.	10000.000	PK	50.7	39.3	-2.8	34.3	-	52.8	68.2	15.4	
Hori.	11510.000	PK	43.3	39.8	-2.2	33.5	-	47.6	73.9	26.4	Floor noise
Hori.	17265.000	PK	43.0	42.0	-0.6	32.4	-	52.0	68.2	16.2	Floor noise
Hori.	1580.000	AV	47.6	25.3	3.4	35.1	-	41.2	53.9	12.7	
Hori.	11510.000	AV	34.6	39.8	-2.2	33.5	-	38.8	53.9	15.1	Floor noise
Vert.	1580.000	PK	54.7	25.3	3.4	35.1	-	48.3	73.9	25.6	
Vert.	5650.000	PK	41.8	31.8	5.3	33.5	-	45.4	68.2	22.8	
Vert.	5700.000	PK	42.1	31.8	5.4	33.5	-	45.8	105.2	59.4	
Vert.	5720.000	PK	49.8	31.9	5.4	33.5	-	53.5	110.8	57.4	
Vert.	5725.000	PK	52.2	31.9	5.4	33.5	-	55.9	122.2	66.3	
Vert.	10000.000	PK	50.4	39.3	-2.8	34.3	-	52.6	68.2	15.6	
Vert.	11510.000	PK	43.0	39.8	-2.2	33.5	-	47.3	73.9	26.6	Floor noise
Vert.	17265.000	PK	42.7	42.0	-0.6	32.4	-	51.7	68.2	16.5	Floor noise
Vert.	1580.000	AV	50.8	25.3	3.4	35.1	-	44.4	53.9	9.5	
Vert.	11510.000	AV	34.3	39.8	-2.2	33.5	-	38.5	53.9	15.4	Floor noise



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.55 m / 3.0 m) = 1.47 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Report No.	13828808H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	June 14, 2021
Temperature / Humidity	25 deg. C / 62 % RH
Engineer	Junya Okuno
Mode	Tx 11ac-40 5755 MHz

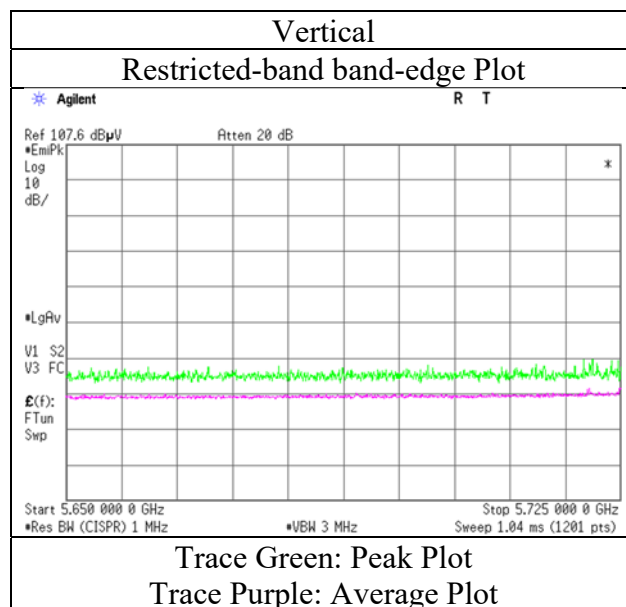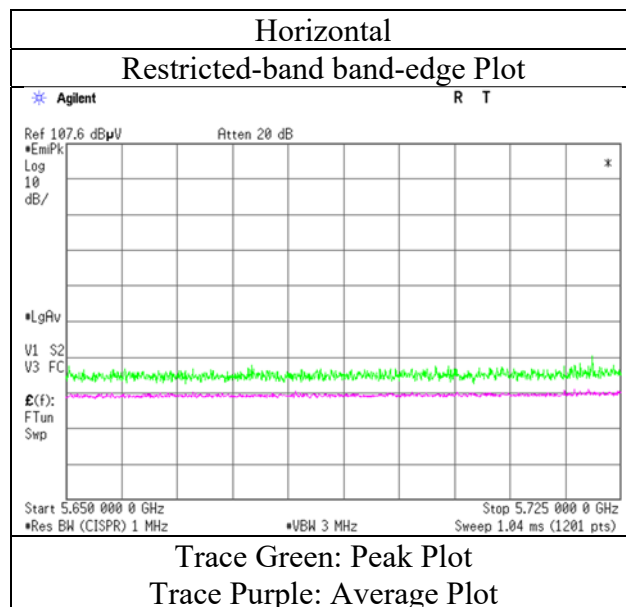

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No.	13828808H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.2	No.2	No.2
Date	June 13, 2021	June 14, 2021	June 15, 2021
Temperature / Humidity	21 deg. C / 57 % RH	25 deg. C / 62 % RH	22 deg. C / 62 % RH
Engineer	Junya Okuno	Junya Okuno	Junya Okuno
	(18 GHz - 40 GHz)	(1 GHz - 10 GHz)	(10 GHz - 18 GHz)
Mode	Tx 11ac-40 5795 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	1580.000	PK	54.7	25.3	3.4	35.1	-	48.3	73.9	25.6	
Hori.	5850.000	PK	42.7	32.3	5.4	33.5	-	46.8	122.2	75.4	
Hori.	5855.000	PK	42.4	32.3	5.4	33.5	-	46.5	110.8	64.3	
Hori.	5875.000	PK	42.1	32.3	5.4	33.5	-	46.3	105.2	58.9	
Hori.	5925.000	PK	42.0	32.4	5.4	33.5	-	46.2	68.2	22.0	
Hori.	10000.000	PK	50.7	39.3	-2.8	34.3	-	52.9	68.2	15.3	
Hori.	11590.000	PK	43.5	39.4	-2.1	33.4	-	47.3	73.9	26.6	Floor noise
Hori.	17385.000	PK	43.4	43.5	-0.6	32.4	-	53.9	68.2	14.3	Floor noise
Hori.	1580.000	AV	47.5	25.3	3.4	35.1	-	41.1	53.9	12.8	
Hori.	11590.000	AV	34.7	39.4	-2.1	33.4	-	38.5	53.9	15.4	Floor noise
Vert.	1580.000	PK	54.9	25.3	3.4	35.1	-	48.5	73.9	25.4	
Vert.	5850.000	PK	42.7	32.3	5.4	33.5	-	46.8	122.2	75.4	
Vert.	5855.000	PK	42.4	32.3	5.4	33.5	-	46.5	110.8	64.3	
Vert.	5875.000	PK	42.3	32.3	5.4	33.5	-	46.5	105.2	58.7	
Vert.	5925.000	PK	42.0	32.4	5.4	33.5	-	46.3	68.2	21.9	
Vert.	10000.000	PK	50.3	39.3	-2.8	34.3	-	52.4	68.2	15.8	
Vert.	11590.000	PK	43.6	39.4	-2.1	33.4	-	47.4	73.9	26.5	Floor noise
Vert.	17385.000	PK	43.8	43.5	-0.6	32.4	-	54.3	68.2	13.9	Floor noise
Vert.	1580.000	AV	50.7	25.3	3.4	35.1	-	44.3	53.9	9.6	
Vert.	11590.000	AV	34.4	39.4	-2.1	33.4	-	38.2	53.9	15.7	Floor noise



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.55 m / 3.0 m) = 1.47 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Report No.	13828808H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	June 14, 2021
Temperature / Humidity	25 deg. C / 62 % RH
Engineer	Junya Okuno
Mode	Tx 11ac-40 5795 MHz

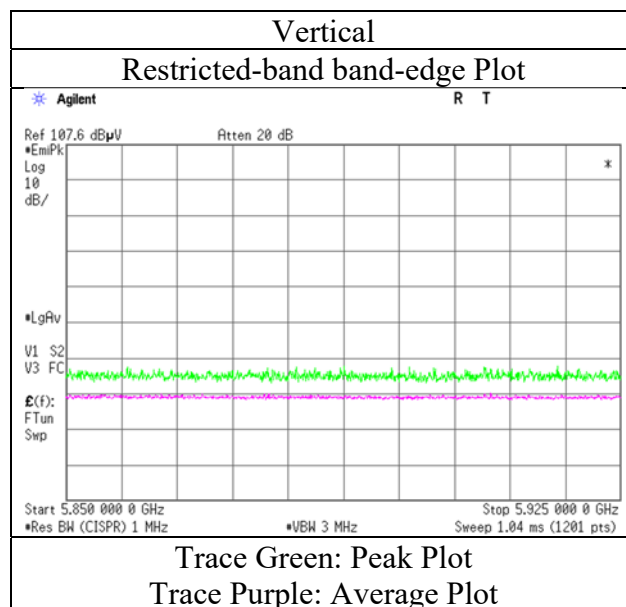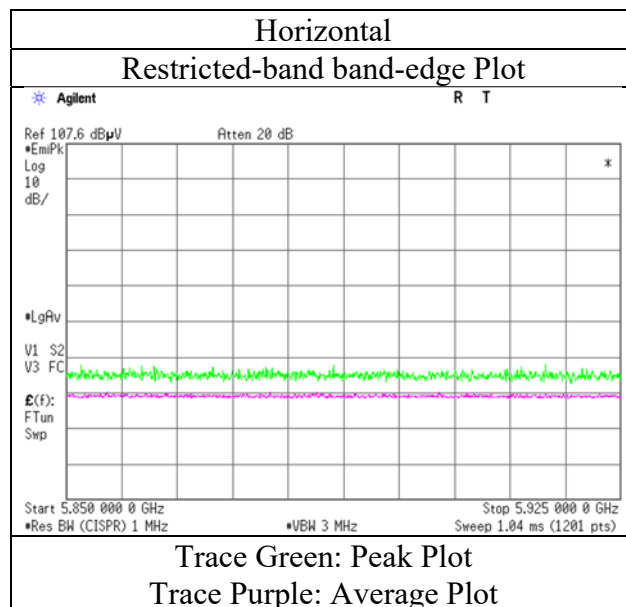

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No.	13828808H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.2	No.2	No.2
Date	June 13, 2021	June 14, 2021	June 15, 2021
Temperature / Humidity	21 deg. C / 57 % RH	25 deg. C / 62 % RH	22 deg. C / 62 % RH
Engineer	Junya Okuno	Junya Okuno	Junya Okuno
	(18 GHz - 40 GHz)	(1 GHz - 10 GHz)	(10 GHz - 18 GHz)
Mode	Tx 11ac-80 5210 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	1580.000	PK	54.7	25.3	3.4	35.1	-	48.3	73.9	25.6	
Hori.	5150.000	PK	50.0	31.9	5.1	33.7	-	53.3	73.9	20.6	
Hori.	5350.000	PK	43.0	31.5	5.2	33.6	-	46.1	73.9	27.8	
Hori.	10000.000	PK	50.8	39.3	-2.8	34.3	-	53.0	68.2	15.2	
Hori.	10420.000	PK	43.7	40.2	-2.7	34.0	-	47.2	68.2	21.0	Floor noise
Hori.	15630.000	PK	43.7	37.2	-1.1	33.0	-	46.8	73.9	27.1	Floor noise
Hori.	1580.000	AV	47.6	25.3	3.4	35.1	-	41.2	53.9	12.7	
Hori.	5150.000	AV	36.3	31.9	5.1	33.7	4.7	44.2	53.9	9.7	*1)
Hori.	5350.000	AV	34.0	31.5	5.2	33.6	4.7	41.8	53.9	12.1	*1)
Hori.	15630.000	AV	35.9	37.2	-1.1	33.0	-	39.1	53.9	14.9	Floor noise
Vert.	1580.000	PK	54.9	25.3	3.4	35.1	-	48.5	73.9	25.5	
Vert.	5150.000	PK	47.4	31.9	5.1	33.7	-	50.7	73.9	23.2	
Vert.	5350.000	PK	43.1	31.5	5.2	33.6	-	46.2	73.9	27.7	
Vert.	10000.000	PK	50.1	39.3	-2.8	34.3	-	52.3	68.2	15.9	
Vert.	10420.000	PK	44.0	40.2	-2.7	34.0	-	47.5	68.2	20.7	Floor noise
Vert.	15630.000	PK	44.0	37.2	-1.1	33.0	-	47.2	73.9	26.8	Floor noise
Vert.	1580.000	AV	50.8	25.3	3.4	35.1	-	44.4	53.9	9.5	
Vert.	5150.000	AV	34.6	31.9	5.1	33.7	4.7	42.5	53.9	11.4	*1)
Vert.	5350.000	AV	33.8	31.5	5.2	33.6	4.7	41.6	53.9	12.3	*1)
Vert.	15630.000	AV	35.9	37.2	-1.1	33.0	-	39.1	53.9	14.9	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.55 m / 3.0 m) = 1.47 dB
10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

*1) Not Out of Band emission(Leakage Power)

Radiated Spurious Emission

Report No.	13828808H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	June 14, 2021
Temperature / Humidity	25 deg. C / 62 % RH
Engineer	Junya Okuno
Mode	Tx 11ac-80 5210 MHz

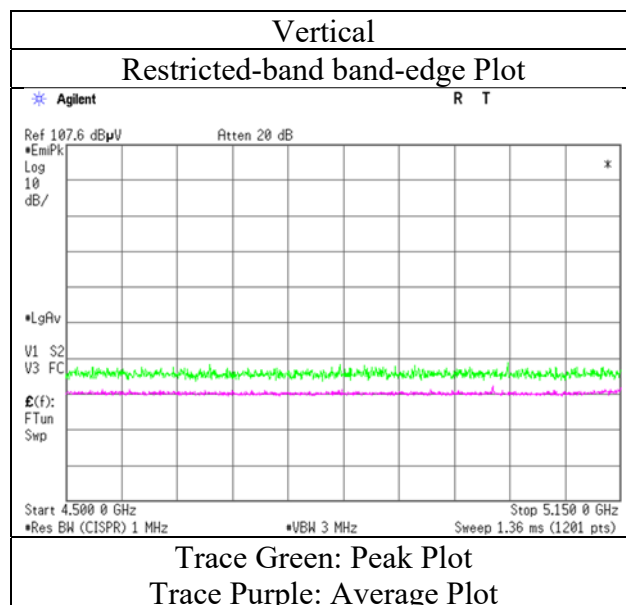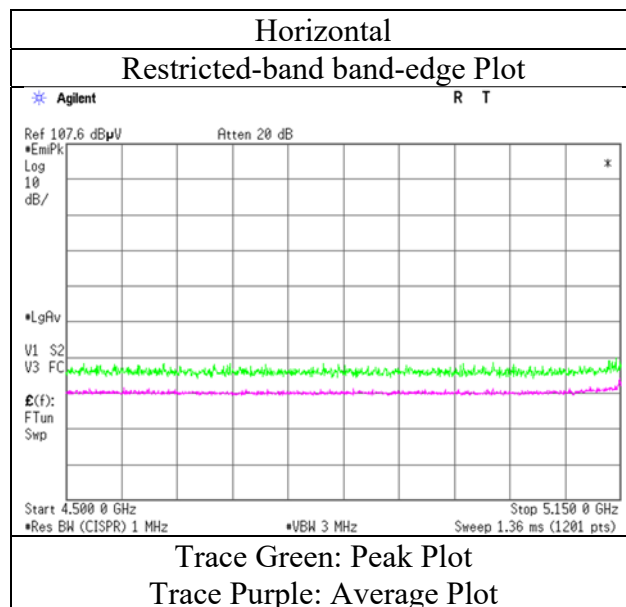

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No.	13828808H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.2	No.2	No.2
Date	June 13, 2021	June 14, 2021	June 15, 2021
Temperature / Humidity	21 deg. C / 57 % RH	25 deg. C / 62 % RH	22 deg. C / 62 % RH
Engineer	Junya Okuno	Junya Okuno	Junya Okuno
	(18 GHz - 40 GHz)	(1 GHz - 10 GHz)	(10 GHz - 18 GHz)
Mode	Tx 11ac-80 5775 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	1580.000	PK	54.7	25.3	3.4	35.1	-	48.3	73.9	25.7	
Hori.	5650.000	PK	42.3	31.8	5.3	33.5	-	45.9	68.2	22.3	
Hori.	5700.000	PK	44.8	31.8	5.4	33.5	-	48.5	105.2	56.7	
Hori.	5720.000	PK	49.5	31.9	5.4	33.5	-	53.2	110.8	57.6	
Hori.	5725.000	PK	51.8	31.9	5.4	33.5	-	55.5	122.2	66.7	
Hori.	5850.000	PK	44.2	32.3	5.4	33.5	-	48.3	122.2	73.9	
Hori.	5855.000	PK	44.0	32.3	5.4	33.5	-	48.2	110.8	62.7	
Hori.	5875.000	PK	42.5	32.3	5.4	33.5	-	46.6	105.2	58.6	
Hori.	5925.000	PK	41.8	32.4	5.4	33.5	-	46.1	68.2	22.2	
Hori.	10000.000	PK	50.8	39.3	-2.8	34.3	-	53.0	68.2	15.2	
Hori.	11550.000	PK	42.9	39.9	-2.1	33.4	-	47.3	73.9	26.6	Floor noise
Hori.	17325.000	PK	43.2	42.9	-0.6	32.4	-	53.1	68.2	15.1	Floor noise
Hori.	1580.000	AV	47.5	25.3	3.4	35.1	-	41.1	53.9	12.8	
Hori.	11550.000	AV	34.2	39.9	-2.1	33.4	-	38.6	53.9	15.3	Floor noise
Vert.	1580.000	PK	54.9	25.3	3.4	35.1	-	48.5	73.9	25.4	
Vert.	5650.000	PK	41.8	31.8	5.3	33.5	-	45.4	68.2	22.8	
Vert.	5700.000	PK	43.8	31.8	5.4	33.5	-	47.4	105.2	57.8	
Vert.	5720.000	PK	48.0	31.9	5.4	33.5	-	51.7	110.8	59.1	
Vert.	5725.000	PK	50.3	31.9	5.4	33.5	-	54.0	122.2	68.2	
Vert.	5850.000	PK	43.2	32.3	5.4	33.5	-	47.3	122.2	74.9	
Vert.	5855.000	PK	42.8	32.3	5.4	33.5	-	47.0	110.8	63.9	
Vert.	5875.000	PK	42.1	32.3	5.4	33.5	-	46.3	105.2	58.9	
Vert.	5925.000	PK	41.7	32.4	5.4	33.5	-	46.0	68.2	22.3	
Vert.	10000.000	PK	50.2	39.3	-2.8	34.3	-	52.3	68.2	15.9	
Vert.	11550.000	PK	42.9	39.9	-2.1	33.4	-	47.2	73.9	26.7	Floor noise
Vert.	17325.000	PK	43.0	42.9	-0.6	32.4	-	52.9	68.2	15.3	Floor noise
Vert.	1580.000	AV	50.7	25.3	3.4	35.1	-	44.3	53.9	9.6	
Vert.	11550.000	AV	34.3	39.9	-2.1	33.4	-	38.7	53.9	15.2	Floor noise


Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.55 m / 3.0 m) = 1.47 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Report No.	13828808H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	June 14, 2021
Temperature / Humidity	25 deg. C / 62 % RH
Engineer	Junya Okuno
Mode	Tx 11ac-80 5775 MHz

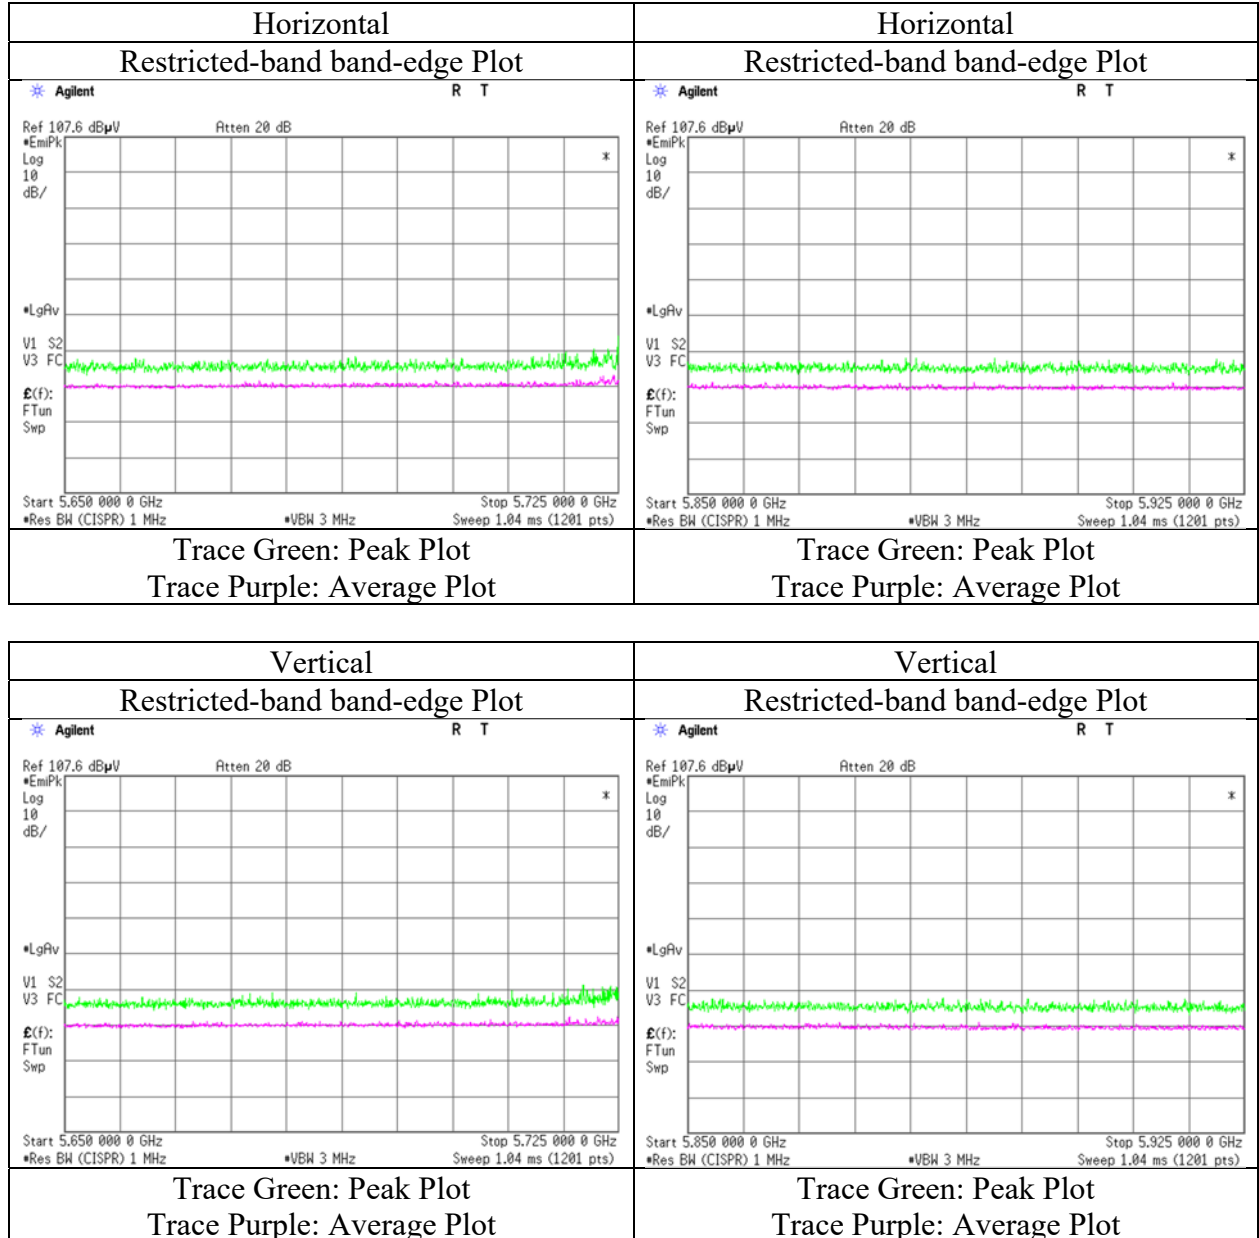

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No. 13828808H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.2 No.3
Date October 18, 2021 October 19, 2021
Temperature / Humidity 22 deg. C / 53 % RH 22 deg. C / 55 % RH
Engineer Hiroki Numata Kiyoshiro Okazaki
(1 GHz - 40 GHz) (30 MHz - 1 GHz)
Mode Tx 11a 5745 MHz + BT DH5 Hopping On

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	31.863	QP	22.8	17.9	7.1	32.3	-	15.5	40.0	24.5	
Hori.	134.720	QP	24.2	14.2	8.5	32.2	-	14.7	43.5	28.8	
Hori.	198.482	QP	29.3	16.8	9.2	32.2	-	23.0	43.5	20.5	
Hori.	214.391	QP	32.5	11.7	9.3	32.2	-	21.3	43.5	22.2	
Hori.	228.015	QP	29.8	11.9	9.4	32.2	-	19.0	46.0	27.0	
Hori.	913.506	QP	21.6	22.3	13.6	30.9	-	26.6	46.0	19.4	
Hori.	1580.000	PK	52.0	25.1	4.0	35.1	-	45.9	73.9	28.0	
Hori.	5650.000	PK	42.8	31.7	6.4	33.5	-	47.4	68.2	20.8	
Hori.	5700.000	PK	44.3	31.8	6.5	33.5	-	49.0	105.2	56.2	
Hori.	5720.000	PK	43.4	31.9	6.5	33.5	-	48.3	110.8	62.5	
Hori.	5725.000	PK	43.7	32.0	6.5	33.5	-	48.6	122.2	73.7	
Hori.	5850.000	PK	42.2	32.3	6.5	33.5	-	47.4	122.2	74.8	Floor noise
Hori.	5855.000	PK	42.4	32.3	6.5	33.5	-	47.7	110.8	63.1	
Hori.	5875.000	PK	42.1	32.3	6.5	33.5	-	47.4	105.2	57.8	
Hori.	5925.000	PK	42.2	32.4	6.5	33.5	-	47.6	68.2	20.6	
Hori.	10000.000	PK	50.0	39.2	-2.6	34.3	-	52.3	68.2	15.9	
Hori.	11490.000	PK	41.7	39.7	-2.0	33.5	-	45.9	73.9	28.0	Floor noise
Hori.	17235.000	PK	42.3	42.6	-0.6	32.4	-	51.9	68.2	16.3	Floor noise
Hori.	1580.000	AV	47.5	25.1	4.0	35.1	-	41.4	53.9	12.5	
Hori.	11490.000	AV	35.2	39.7	-2.0	33.5	-	39.5	53.9	14.4	Floor noise
Vert.	31.863	QP	26.1	17.9	7.1	32.3	-	18.8	40.0	21.2	
Vert.	134.720	QP	22.3	14.2	8.5	32.2	-	12.8	43.5	30.7	
Vert.	198.482	QP	22.7	16.8	9.2	32.2	-	16.4	43.5	27.1	
Vert.	214.391	QP	32.0	11.7	9.3	32.2	-	20.8	43.5	22.7	
Vert.	228.015	QP	28.4	11.9	9.4	32.2	-	17.6	46.0	28.4	
Vert.	913.506	QP	21.6	22.3	13.6	30.9	-	26.6	46.0	19.4	Floor noise
Vert.	1580.000	PK	55.3	25.1	4.0	35.1	-	49.3	73.9	24.7	
Vert.	5650.000	PK	43.4	31.7	6.4	33.5	-	48.0	68.2	20.2	
Vert.	5700.000	PK	42.6	31.8	6.5	33.5	-	47.3	105.2	57.9	
Vert.	5720.000	PK	43.2	31.9	6.5	33.5	-	48.0	110.8	62.8	
Vert.	5725.000	PK	43.8	32.0	6.5	33.5	-	48.7	122.2	73.5	
Vert.	5850.000	PK	42.8	32.3	6.5	33.5	-	48.1	122.2	74.1	
Vert.	5855.000	PK	42.1	32.3	6.5	33.5	-	47.4	110.8	63.4	
Vert.	5875.000	PK	42.2	32.3	6.5	33.5	-	47.5	105.2	57.7	
Vert.	5925.000	PK	42.0	32.4	6.5	33.5	-	47.4	68.2	20.8	
Vert.	10000.000	PK	49.2	39.2	-2.6	34.3	-	51.5	68.2	16.7	
Vert.	11490.000	PK	41.7	39.7	-2.0	33.5	-	46.0	73.9	27.9	Floor noise
Vert.	17235.000	PK	42.4	42.6	-0.6	32.4	-	52.0	68.2	16.2	Floor noise
Vert.	1580.000	AV	49.3	25.1	4.0	35.1	-	43.2	53.9	10.7	
Vert.	11490.000	AV	34.5	39.7	-2.0	33.5	-	38.7	53.9	15.2	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.55 m / 3.0 m) = 1.47 dB
10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No.	13828808H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	October 18, 2021
Temperature / Humidity	22 deg. C / 53 % RH
Engineer	Hiroki Numata
	(1 GHz - 40 GHz)
Mode	Tx 11a 5745 MHz + Tx Hopping On DH5

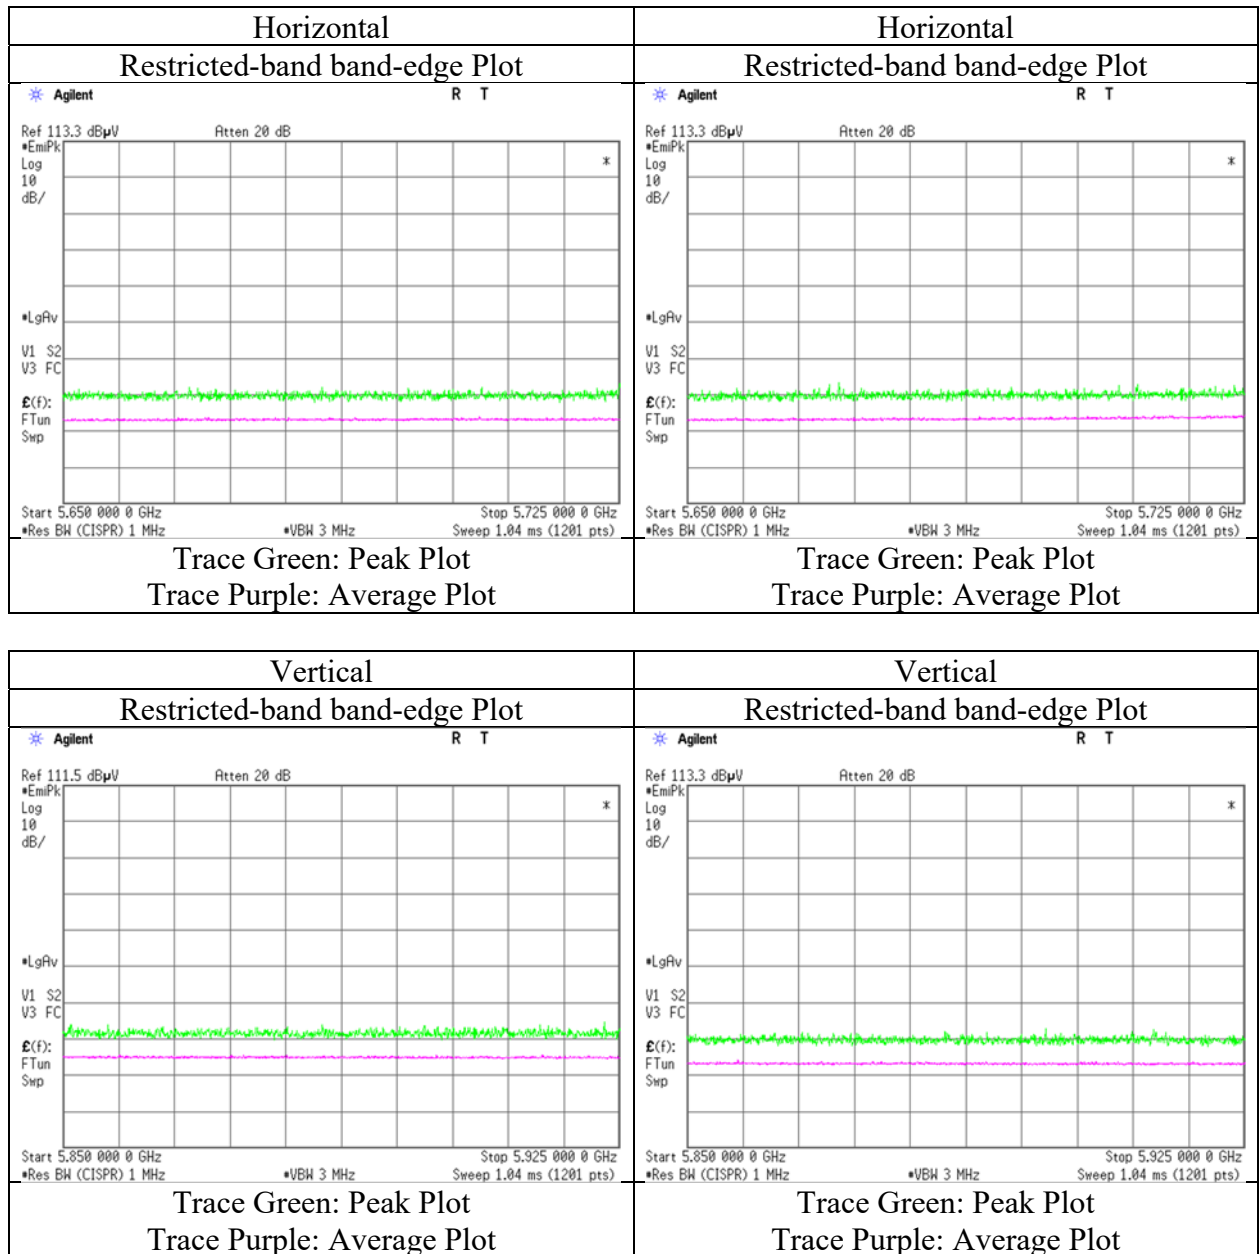

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission (Plot data, Worst case)

Report No.	13828808H	No.2	No.2	No.2
Test place	Ise EMC Lab.	No.2	No.2	No.2
Semi Anechoic Chamber	No.2	No.2	No.2	No.2
Date	June 13, 2021	June 14, 2021	June 15, 2021	June 16, 2021
Temperature / Humidity	21 deg. C / 57 % RH	21 deg. C / 76 % RH	21 deg. C / 73 % RH	23 deg. C / 70 % RH
Engineer	Junya Okuno (18 GHz - 40 GHz)	Hiroyuki Furutaka (1 GHz - 10 GHz)	Hiroyuki Furutaka (10 GHz - 18 GHz)	Junki Nagatomi (Below 1 GHz)
Mode	Tx 11a 5180 MHz			

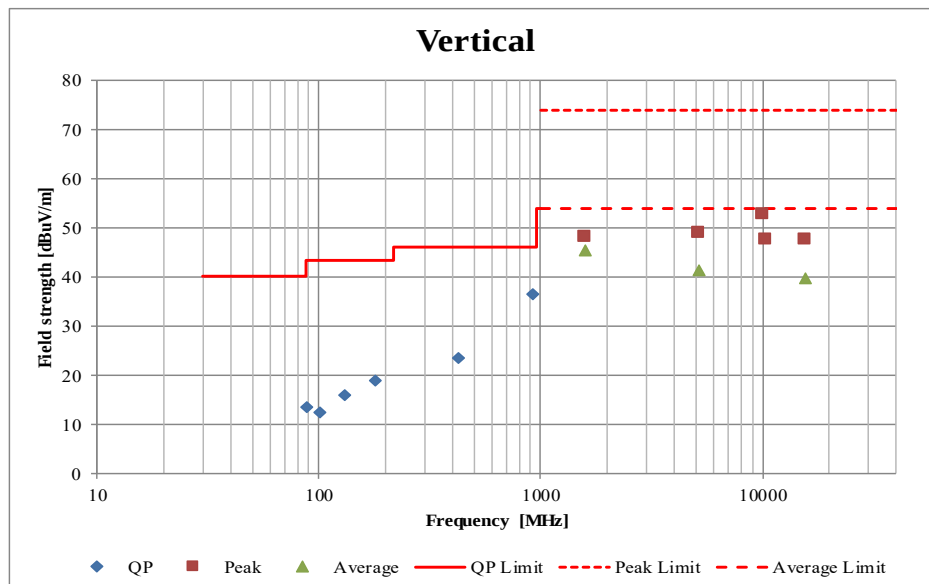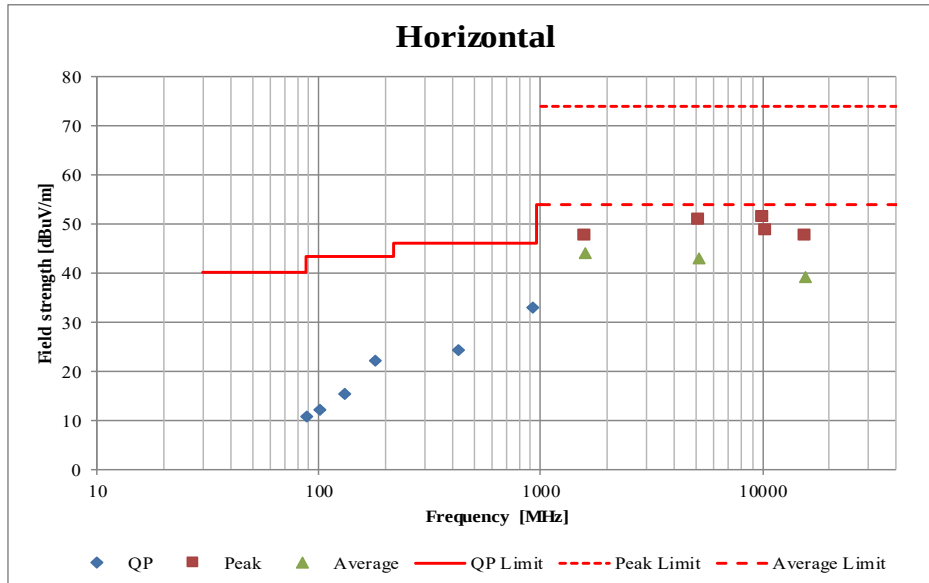

*These plots data contains sufficient number to show the trend of characteristic features for EUT.

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Report No.	13828808H
Test place	Ise EMC Lab. No.6 Measurement Room
Date	June 15, 2021
Temperature / Humidity	25 deg. C / 67 % RH
Engineer	Takafumi Noguchi
Mode	Tx 11a 5180MHz Antenna 1

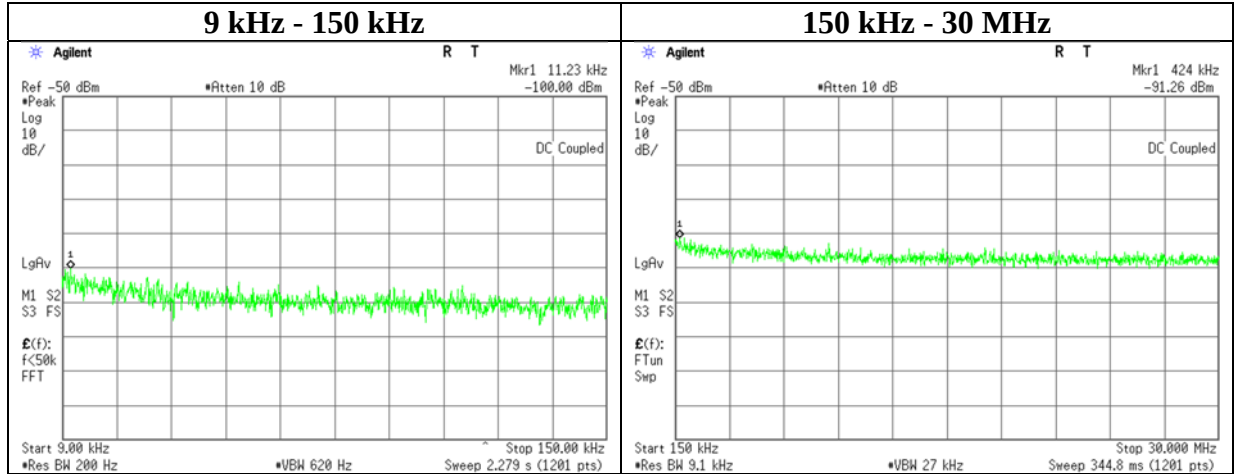

Antenna 1

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator [dB]	Antenna Gain [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
11.23	-100.0	0.03	9.8	2.9	1	-87.2	300	6.0	-26.0	46.5	72.5	
424.00	-91.3	0.04	9.8	2.9	1	-78.5	300	6.0	-17.2	15.0	32.2	

$$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log(\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$$

$$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log(N)$$

N: Number of output

APPENDIX 2: Test instruments

Test equipment (Test on June 11 to 16, 2021)

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
AT	MOS-14	141561	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	1401	01/15/2021	12
AT	MMM-12	141547	DIGITAL HiTESTER	HIOKI E.E. CORPORATION	3805	60500120	02/01/2021	12
AT	MCC-211	141322	Microwave Cable	RS Pro	R-132G7210200CD	-	04/02/2021	12
AT	MCC-244	197219	Microwave cable	Huber+Suhner	SF126E/11PC35/11PC35/2000MM	536999/126E	03/04/2021	12
AT	MAT-58	141334	Attenuator(10dB)	Suhner	6810.19.A	-	12/07/2020	12
AT	MCC-210	141289	Microwave Cable	RS Pro	R-132G7210200CD	-	04/02/2021	12
AT	MPM-17	141813	Power Meter	Raditec (Formerly DARE!! Instruments)	RPR3006W	14I00048SNO081	11/06/2020	12
AT	MSA-16	141903	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY46186390	12/18/2020	12
RE	MOS-41	192300	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	0013	12/06/2020	12
RE	MMM-01	141542	Digital Tester	Fluke Corporation	FLUKE 26-3	78030611	08/18/2020	12
RE	MJM-27	142228	Measure	KOMELON	KMC-36	-	-	-
RE	COTS-MEMI-02	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
RE	MAEC-02-SVSWR	142006	AC2_Semi Anechoic Chamber(SVSWR)	TDK	Semi Anechoic Chamber 3m	DA-06902	04/09/2021	24
RE	MCC-218	141394	Microwave Cable	Junkosha	MWX221	1607S141(1 m) / 1608S264(5 m)	09/23/2020	12
RE	MPA-10	141579	Pre Amplifier	Keysight Technologies Inc	8449B	3008A02142	02/18/2021	12
RE	MHA-29	141517	Horn Antenna 26.5-40GHz	ETS-Lindgren	3160-10	152399	08/03/2020	12
RE	MCC-224	160324	Coaxial Cable	Huber+Suhner	SUCOFLEX 102A	MY009/2A	11/17/2020	12
RE	MPA-22	141588	Pre Amplifier	MITEQ, Inc	AMF-6F-2600400-33-8P / AMF-4F-2600400-33-8P	1871355 / 1871328	09/07/2020	12
RE	MHA-17	141506	Horn Antenna 15-40GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9170	BBHA9170307	07/16/2020	12
RE	MSA-10	141899	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY46180655	08/04/2020	12
RE	MHA-06	141512	Horn Antenna 1-18GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	254	09/14/2020	12
RE	MRENT-130	141855	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY46187750	11/18/2020	12
RE	MHF-16	141406	High Pass Filter 7-20GHz	TOKIMEC	TF37NCCA	7001	09/23/2020	12
RE	MCC-176	141279	Microwave Cable	Junkosha	MMX221-00500DMSDMS	1502S303	03/01/2021	12
AT	MCC-38	141395	Coaxial Cable	UL Japan	-	-	11/17/2020	12
AT	MAT-10	141156	Attenuator(10dB)	Weinschel Corp	2	BL1173	11/13/2020	12
RE	MAT-07	141203	Attenuator(6dB)	Weinschel Corp	2	BK7970	11/13/2020	12
RE	MBA-08	141427	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	VHA9103B+BBA9106	8031	07/29/2020	12
RE	MCC-12	141317	Coaxial Cable	UL Japan Inc.	-	-	09/25/2020	12
RE	MLA-21	141265	Logperiodic Antenna (200-1000MHz)	Schwarzbeck Mess-Elektronik OHG	VUSLP9111B	9111B-190	07/29/2020	12
RE	MPA-24	141594	Pre Amplifier	Keysight Technologies Inc	8447D	2944A10150	02/18/2021	12
RE	MTR-09	141950	EMI Test Receiver	Rohde & Schwarz	ESU26	100412	06/03/2020	12
RE	MAEC-02	142004	AC2_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-06902	05/26/2020	24

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Test equipment (Test on October 18 and 19, 2021)

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	MOS-41	192300	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	0013	12/06/2020	12
RE	MMM-01	141542	Digital Tester	Fluke Corporation	FLUKE 26-3	78030611	08/10/2021	12
RE	MJM-27	142228	Measure	KOMELON	KMC-36	-	-	-
RE	COTS-ME MI-02	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
RE	MAEC-02-SVSWR	142006	AC2 Semi Anechoic Chamber(SVSWR)	TDK	Semi Anechoic Chamber 3m	DA-06902	04/09/2021	24
RE	MCC-218	141394	Microwave Cable	Junkosha	MWX221	1607S141(1 m) / 1608S264(5 m)	09/30/2021	12
RE	MPA-10	141579	Pre Amplifier	Keysight Technologies Inc	8449B	3008A02142	02/18/2021	12
RE	MHA-29	141517	Horn Antenna 26.5-40GHz	ETS-Lindgren	3160-10	152399	08/27/2021	12
RE	MCC-224	160324	Coaxial Cable	Huber+Suhner	SUCOFLEX 102A	MY009/2A	11/17/2020	12
RE	MPA-22	141588	Pre Amplifier	MITEQ, Inc	AMF-6F-2600400-33-8P / AMF-4F-2600400-33-8P	1871355 / 1871328	09/30/2021	12
RE	MRENT-130	141855	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY46187750	11/18/2020	12
RE	MHF-16	141406	High Pass Filter 7-20GHz	TOKIMEC	TF37NCCA	7001	09/30/2021	12
RE	MCC-176	141279	Microwave Cable	Junkosha	MMX221-00500DMSDMS	1502S303	03/01/2021	12
RE	MHA-20	141507	Horn Antenna 1-18GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	258	10/01/2020	12
RE	MHA-02	141503	Horn Antenna 18-26.5GHz	EMCO	3160-09	1265	06/28/2021	12
RE	MSA-04	141885	Spectrum Analyzer	Keysight Technologies Inc	E4448A	US44300523	11/09/2020	12
RE	MAEC-03	142008	AC3 Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	05/22/2020	24
RE	MOS-13	141554	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	1301	01/15/2021	12
RE	MMM-08	141532	DIGITAL HiTESTER	HIOKI E.E. CORPORATION	3805	51201197	01/07/2021	12
RE	MJM-16	142183	Measure	KOMELON	KMC-36	-	-	-
RE	MAT-95	142314	Attenuator	Pasternack Enterprises	PE7390-6	D/C 1504	06/09/2021	12
RE	MBA-03	141424	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	VHA9103+BBA9106	1915	08/21/2021	12
RE	MCC-51	141323	Coaxial cable	UL Japan	-	-	07/19/2021	12
RE	MLA-22	141266	Logperiodic Antenna(200-1000MHz)	Schwarzbeck Mess-Elektronik OHG	VUSLP9111B	9111B-191	08/21/2021	12
RE	MPA-13	141582	Pre Amplifier	SONOMA INSTRUMENT	310	260834	02/18/2021	12
RE	MTR-03	141942	Test Receiver	Rohde & Schwarz	ESCI	100300	08/05/2021	12

*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item:

RE: Radiated Emission

AT: Antenna Terminal Conducted test

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124