



RADIO TEST REPORT


Test Report No. : 14011106H-A-R1

Applicant : DENSO TEN Limited
Type of EUT : Car Audio
Model Number of EUT : TN0023A
FCC ID : BABTN0023A
Test regulation : FCC Part 15 Subpart C: 2021
*Bluetooth (BR / EDR) parts
Test Result : Complied (Refer to SECTION 3)


1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
6. This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
7. The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
8. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.
9. The information provided from the customer for this report is identified in SECTION 1.
10. This report is a revised version of 14011106H-A. 14011106H-A is replaced with this report.

Date of test: September 16 to October 19, 2021

Representative test engineer:


Ken Fujita
Engineer

Approved by:


Tsubasa Takayama
Leader



CERTIFICATE 5107.02

- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.
- ☒ There is no testing item of "Non-accreditation".

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

REVISION HISTORY

Original Test Report No.: 14011106H-A

Revision	Test report No.	Date	Page revised	Contents
- (Original)	14011106H-A	October 20, 2021	-	-
1	14011106H-A-R1	October 26, 2021	P.10	Addition of Tested Antenna to Simultaneous transmission table
1	14011106H-A-R1	October 26, 2021	P.10	Correction of Sentence *1) in Simultaneous transmission table

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	MCS	Modulation and Coding Scheme
AC	Alternating Current	MRA	Mutual Recognition Arrangement
AFH	Adaptive Frequency Hopping	N/A	Not Applicable
AM	Amplitude Modulation	NIST	National Institute of Standards and Technology
Amp, AMP	Amplifier	NS	No signal detect.
ANSI	American National Standards Institute	NSA	Normalized Site Attenuation
Ant, ANT	Antenna	NVLAP	National Voluntary Laboratory Accreditation Program
AP	Access Point	OBW	Occupied Band Width
ASK	Amplitude Shift Keying	OFDM	Orthogonal Frequency Division Multiplexing
Atten., ATT	Attenuator	P/M	Power meter
AV	Average	PCB	Printed Circuit Board
BPSK	Binary Phase-Shift Keying	PER	Packet Error Rate
BR	Bluetooth Basic Rate	PHY	Physical Layer
BT	Bluetooth	PK	Peak
BT LE	Bluetooth Low Energy	PN	Pseudo random Noise
BW	BandWidth	PRBS	Pseudo-Random Bit Sequence
Cal Int	Calibration Interval	PSD	Power Spectral Density
CCK	Complementary Code Keying	QAM	Quadrature Amplitude Modulation
Ch., CH	Channel	QP	Quasi-Peak
CISPR	Comite International Special des Perturbations Radioelectriques	QPSK	Quadri-Phase Shift Keying
CW	Continuous Wave	RBW	Resolution Band Width
DBPSK	Differential BPSK	RDS	Radio Data System
DC	Direct Current	RE	Radio Equipment
D-factor	Distance factor	RF	Radio Frequency
DFS	Dynamic Frequency Selection	RMS	Root Mean Square
DQPSK	Differential QPSK	RSS	Radio Standards Specifications
DSSS	Direct Sequence Spread Spectrum	Rx	Receiving
EDR	Enhanced Data Rate	SA, S/A	Spectrum Analyzer
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	SG	Signal Generator
EMC	ElectroMagnetic Compatibility	SVSWR	Site-Voltage Standing Wave Ratio
EMI	ElectroMagnetic Interference	TR	Test Receiver
EN	European Norm	Tx	Transmitting
ERP, e.r.p.	Effective Radiated Power	VBW	Video BandWidth
EU	European Union	Vert.	Vertical
EUT	Equipment Under Test	WLAN	Wireless LAN
Fac.	Factor		
FCC	Federal Communications Commission		
FHSS	Frequency Hopping Spread Spectrum		
FM	Frequency Modulation		
Freq.	Frequency		
FSK	Frequency Shift Keying		
GFSK	Gaussian Frequency-Shift Keying		
GNSS	Global Navigation Satellite System		
GPS	Global Positioning System		
Hori.	Horizontal		
ICES	Interference-Causing Equipment Standard		
IEC	International Electrotechnical Commission		
IEEE	Institute of Electrical and Electronics Engineers		
IF	Intermediate Frequency		
ILAC	International Laboratory Accreditation Conference		
ISED	Innovation, Science and Economic Development Canada		
ISO	International Organization for Standardization		
JAB	Japan Accreditation Board		
LAN	Local Area Network		
LIMS	Laboratory Information Management System		

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

CONTENTS	PAGE
SECTION 1: Customer information.....	5
SECTION 2: Equipment under test (EUT).....	5
SECTION 3: Test specification, procedures & results.....	7
SECTION 4: Operation of EUT during testing.....	10
SECTION 5: Radiated Spurious Emission	15
SECTION 6: Antenna Terminal Conducted Tests.....	17
APPENDIX 1: Test data	18
20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation	18
Number of Hopping Frequency	22
Dwell time.....	24
Maximum Peak Output Power	27
Average Output Power	28
Radiated Spurious Emission	30
Conducted Spurious Emission	46
Conducted Emission Band Edge compliance	52
APPENDIX 2: Test instruments	54
APPENDIX 3: Photographs of test setup	56
Radiated Spurious Emission	56
Antenna Terminal Conducted Tests.....	57

SECTION 1: Customer information

Company Name	:	DENSO TEN Limited
Address	:	2-28, Gosho-dori 1-Chome, Hyogo-ku, Kobe, 652-8510 JAPAN
Telephone Number	:	+81-78-682-2159
Facsimile Number	:	+81-78-682-2169
Contact Person	:	Kaoru Abe

The information provided from the customer is as follows;

- Applicant, Type of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer information
- SECTION 2: Equipment under test (EUT) other than the Receipt Date
- SECTION 4: Operation of EUT during testing

* The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

SECTION 2: Equipment under test (EUT)

2.1 Identification of EUT

Type	:	Car Audio
Model Number	:	TN0023A
Serial Number	:	Refer to SECTION 4.2
Rating	:	DC 12 V
Receipt Date	:	June 4, 2021
Country of Mass-production	:	Japan
Condition	:	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	:	No Modification by the test lab.

2.2 Product Description

Model: TN0023A (referred to as the EUT in this report) is a Car Audio.

Radio Specification

Radio Type : Transceiver
Clock frequency(ies) : 7.3333333 GHz

	IEEE802.11b	IEEE802.11g/n (20 M band)	IEEE802.11a/n/ac (20 M band)	IEEE802.11n/ac (40 M band)	IEEE802.11ac (80 M band)
Frequency of operation	2412 MHz - 2462 MHz	2412 MHz - 2462 MHz	5180 MHz - 5240 MHz 5745 MHz - 5825 MHz	5190 MHz - 5230 MHz 5755 MHz - 5795 MHz	5210 MHz 5775 MHz
Type of modulation	DSSS (CCK, DQPSK, DBPSK)	OFDM-CCK (64QAM, 16QAM, QPSK, BPSK)	OFDM (64QAM, 16QAM, QPSK, BPSK, 256QAM (IEEE802.11ac only))		
Channel spacing	5MHz		20MHz	40MHz	80MHz
Antenna type	Inverted F Antenna				
Antenna Connector type	U.FL-R-SMT-1(80)				
Antenna Gain	-1.41 dBi (Peak): 2.4 GHz Band 3.28 dBi (Peak) (ANT 1) / 1.79 dBi (Peak) (ANT 2) : 5 GHz Band				

	Bluetooth Ver.5.0 with EDR function
Frequency of operation	2402 MHz - 2480 MHz
Type of modulation	BT: FHSS (GFSK, $\pi/4$ -DQPSK, 8-DPSK) LE: GFSK
Channel spacing	BT: 1 MHz LE: 2 MHz
Antenna type	Inverted F Antenna
Antenna Connector type	U.FL-R-SMT-1(80)
Antenna Gain	0.70 dBi (Peak)

	Broadcast Receiver
Radio Type	Receiver
Frequency of Operation	AM, HD_AM: 530 kHz - 1710 kHz FM, RBDS/HD_FM: 87.75 MHz - 107.9 MHz SDARS: 2320 MHz - 2345 MHz
Channel spacing	AM, HD_AM: 10 kHz FM, RBDS/HD_FM: 200 kHz
Antenna connector type	HFC IV

* This test report applies to BT (BR/EDR) only.

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C
FCC Part 15 final revised on May 3, 2021 and effective July 2, 2021

Title : FCC 47 CFR Part 15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz,
and 5725-5850 MHz

3.2 Procedures and results

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013 6. Standard test methods ISED: RSS-Gen 8.8	FCC: Section 15.207 ISED: RSS-Gen 8.8	-	N/A	*1)
Carrier Frequency Separation	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(a)(1) ISED: RSS-247 5.1 (b)	See data.	Complied a)	Conducted
20dB Bandwidth	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(a)(1) ISED: RSS-247 5.1 (a)		Complied a)	Conducted
Number of Hopping Frequency	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(a)(1)(iii) ISED: RSS-247 5.1 (d)		Complied b)	Conducted
Dwell time	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(a)(1)(iii) ISED: RSS-247 5.1 (d)		Complied c)	Conducted
Maximum Peak Output Power	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.12	FCC: Section 15.247(a)(b)(1) ISED: RSS-247 5.4 (b)		Complied d)	Conducted
Spurious Emission & Band Edge Compliance	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.13	FCC: Section 15.247(d) ISED: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10	3.3 dB 5000.000 MHz, AV, Vert.	Complied# e) / f)	Conducted/ Radiated (above 30 MHz) *2)

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

*1) The test is not applicable since the EUT is not the device that is designed to be connected to the public utility (AC) power line.

*2) Radiated test was selected over 30 MHz based on section 15.247(d).

a) Refer to APPENDIX 1 (data of 20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation)

b) Refer to APPENDIX 1 (data of Number of Hopping Frequency)

c) Refer to APPENDIX 1 (data of Dwell time)

d) Refer to APPENDIX 1 (data of Maximum Peak Output Power)

e) Refer to APPENDIX 1 (data of Conducted Spurious Emission)

f) Refer to APPENDIX 1 (data of Radiated Spurious Emission)

Symbols:

Complied The data of this test item has enough margin, more than the measurement uncertainty.

Complied# The data of this test item meets the limits unless the measurement uncertainty is taken into consideration.

* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

FCC Part 15.31 (e)

This EUT provides stable voltage constantly to RF Module regardless of input voltage. Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99% Occupied Bandwidth	ISED: RSS-Gen 6.7	ISED: -	N/A	- a)	Conducted
a) Refer to APPENDIX 1 (data of 20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation)					

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

There is no applicable rule of uncertainty in this applied standard. Therefore, the results are derived depending on whether or not laboratory uncertainty is applied.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.

Ise EMC Lab.

Antenna Terminal test

Test Item	Uncertainty (+/-)
20 dB Bandwidth / 99 % Occupied Bandwidth	0.96 %
Maximum Peak Output Power / Average Output Power	1.4 dB
Carrier Frequency Separation	0.42 %
Dwell time / Burst rate	0.10 %
Conducted Spurious Emission	2.6 dB

Radiated emission

Measurement distance	Frequency range	Uncertainty (+/-)
3 m	9 kHz to 30 MHz	3.3 dB
10 m		3.2 dB
3 m	30 MHz to 200 MHz (Horizontal)	4.8 dB
	(Vertical)	5.0 dB
	200 MHz to 1000 MHz (Horizontal)	5.2 dB
	(Vertical)	6.3 dB
10 m	30 MHz to 200 MHz (Horizontal)	4.8 dB
	(Vertical)	4.8 dB
	200 MHz to 1000 MHz (Horizontal)	5.0 dB
	(Vertical)	5.0 dB
3 m	1 GHz to 6 GHz	4.9 dB
	6 GHz to 18 GHz	5.2 dB
1 m	10 GHz to 26.5 GHz	5.5 dB
	26.5 GHz to 40 GHz	5.5 dB
10 m	1 GHz to 18 GHz	5.2 dB

3.5 Test Location

UL Japan, Inc. Ise EMC Lab.

*A2LA Certificate Number: 5107.02 / FCC Test Firm Registration Number: 884919

ISED Lab Company Number: 2973C / CAB identifier: JP0002

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.5 measurement room	6.4 x 6.4 x 3.0	6.4 x 6.4	-	-
No.6 shielded room	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.10 shielded room	3.8 x 2.8 x 2.8	3.8 x 2.8	-	-
No.11 measurement room	4.0 x 3.4 x 2.5	N/A	-	-
No.12 measurement room	2.6 x 3.4 x 2.5	N/A	-	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0 m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 4: Operation of EUT during testing

4.1 Operating Mode(s)

Details of Operating Mode(s)

Test Item	Mode	Tested frequency
Spurious Emission (Conducted/Radiated)	Tx (Hopping Off) DH5, 3DH5	2402 MHz 2441 MHz 2480 MHz
Carrier Frequency Separation	Tx (Hopping On) DH5, 3DH5	2402 MHz 2441 MHz 2480 MHz
20dB Bandwidth	Tx (Hopping Off) DH5, 3DH5	2402 MHz 2441 MHz 2480 MHz
Number of Hopping Frequency	Tx (Hopping On) DH5, 3DH5	-
Dwell time	Tx (Hopping On), -DH1, DH3, DH5 -3DH1, 3DH3, 3DH5	-
Maximum Peak Output Power	Tx (Hopping Off) DH5, 2DH5, 3DH5	2402 MHz 2441 MHz 2480 MHz
Band Edge Compliance (Conducted)	Tx DH5, 3DH5 -Hopping On -Hopping Off	2402 MHz 2480 MHz
99% Occupied Bandwidth	Tx DH5, 3DH5 -Hopping On -Hopping Off	2402 MHz 2441 MHz 2480 MHz
*As a result of preliminary test, the formal test was performed with the above modes, which had the maximum payload length (except Dwell time test) *2DH mode (2Mb/s EDR: pi/4DQPSK) was excluded for other tests than power measurement by using 3DH mode (3 Mb/s EDR: 8DPSK) as a representative. * It is considered that the non-tested packet type (e.g. inquiry) can be omitted as it is complied with above all the test items based on Bluetooth Core specification. *EUT has the power settings by the software as follows; Power settings: BDR: +8 dBm EDR: +5 dBm Software: BSDT Ver 5.2.0 (Date: October 9, 2019) (Storage location: Driven by connected PC) *This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.		

Simultaneous transmission

Test Item	Mode *1)	Tested Antenna
Radiated Spurious Emission	Tx 3DH5 2402 MHz + Tx 11a 5180 MHz Tx 3DH5 2441 MHz + Tx 11a 5180 MHz Tx 3DH5 2480 MHz + Tx 11a 5180 MHz	Bluetooth (Antenna 2) + 11a (Antenna 2)
*1) The test was performed on the mode as a representative, because it had the highest power (11a mode /Antenna 2) of 5 GHz band at antenna terminal test.		

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

4.2 Configuration and peripherals

For Antenna Terminal Conducted Tests

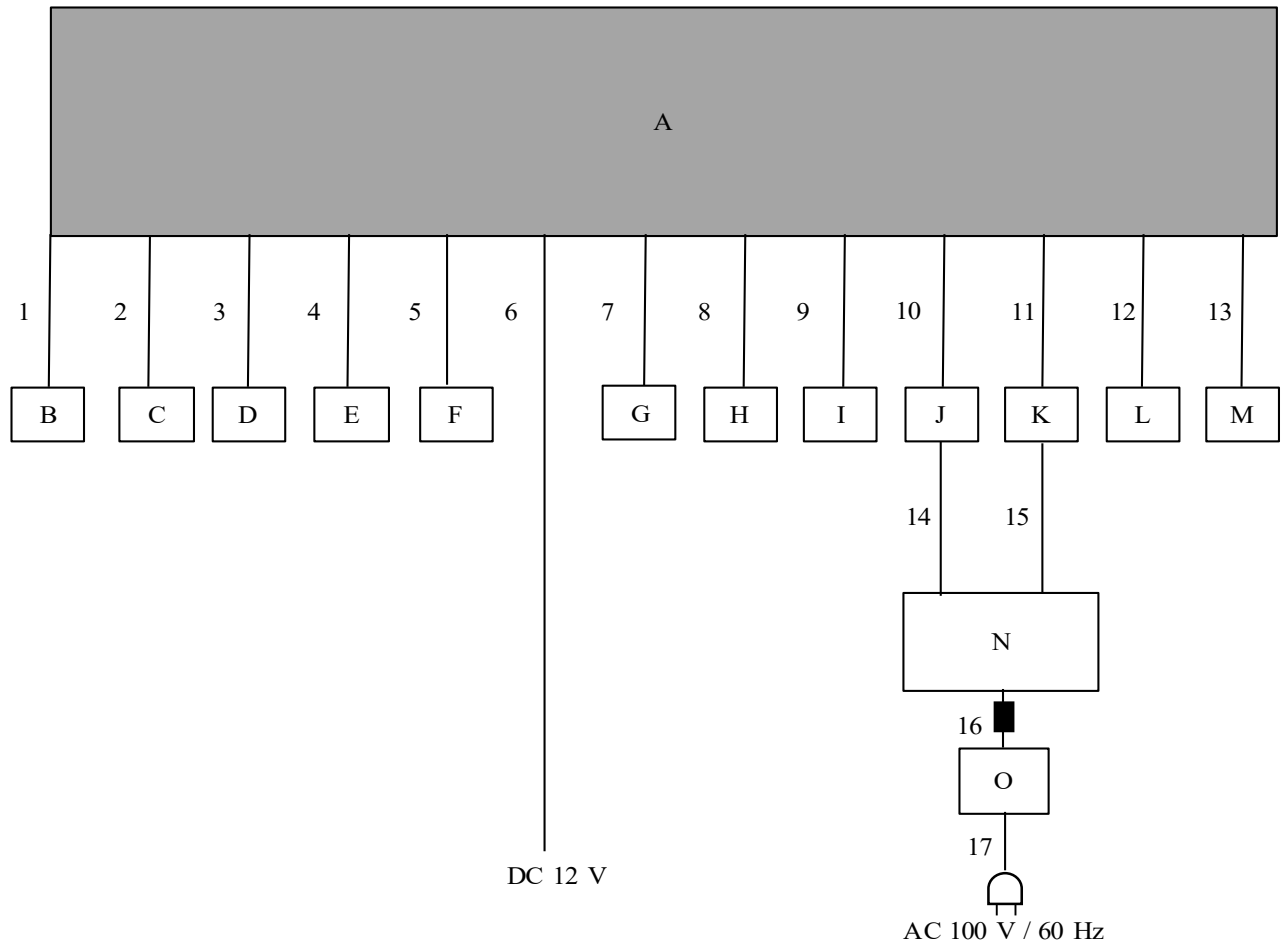

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Car Audio	TN0023A	AT300014	DENSO TEN Limited	EUT
B	Switch	-	-	-	-
C	DCM	19MC_DCM	E-033720026/008	DENSO Corporation	-
D	Steering Switch	PA6-GF30	39	TOYOTA	-
E	Low noise Amp	ZX60-242GLN-S+	S 2036302044	Mini-Circuits	-
F	GPS Antenna	23D900113	No. 48	yokowo co.,ltd.	-
G	FM/AM connector (Main)	86300-30C30	AS500586	DENSO TEN Limited	-
H	FM/AM connector (Sub)	86300-30C70	AS400124	DENSO TEN Limited	-
I	Back Camera	GP-KD7301RC	85C602752	Panasonic	-
J	USB LAN transfer	ETX3-US2	G000024	I-O DATA	-
K	Jig Board	135943-58990920	3700980A186	DENSO TEN Limited	-
L	Mic	SDA3510A	0AC067100	Panasonic	-
M	Mic	SDA3510A	0AC067082	Panasonic	-
N	Laptop PC	X1 Carbon	R9-OH8OBW 15/9	Lenovo	-
O	AC Adapter	ADLX45NCC2A	11S45N0299Z1ZS944 B6KBR	Lenovo	-

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	Signal Cable	2.4	Unshielded	Unshielded	-
2	Signal Cable	2.4	Unshielded	Unshielded	-
3	Signal Cable	2.4	Unshielded	Unshielded	-
4	Signal Cable	1.0	Unshielded	Unshielded	-
5	GNSS Antenna Cable	2.6	Shielded	Shielded	-
6	DC Cable	3.4	Unshielded	Unshielded	-
7	Signal Cable	2.6	Unshielded	Unshielded	-
8	Signal Cable	2.6	Unshielded	Unshielded	-
9	Signal Cable	2.4	Unshielded	Unshielded	-
10	USB Cable	3.2	Shielded	Shielded	-
11	Signal Cable	0.1	Unshielded	Unshielded	-
12	Signal Cable	2.7	Unshielded	Unshielded	-
13	Signal Cable	2.7	Unshielded	Unshielded	-
14	LAN Cable	1.0	Unshielded	Unshielded	-
15	USB Cable	0.2	Shielded	Shielded	-
16	DC Cable	1.7	Unshielded	Unshielded	-
17	AC Cable	1.6	Unshielded	Unshielded	-

UL Japan, Inc.


Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

For Radiated Spurious Emission

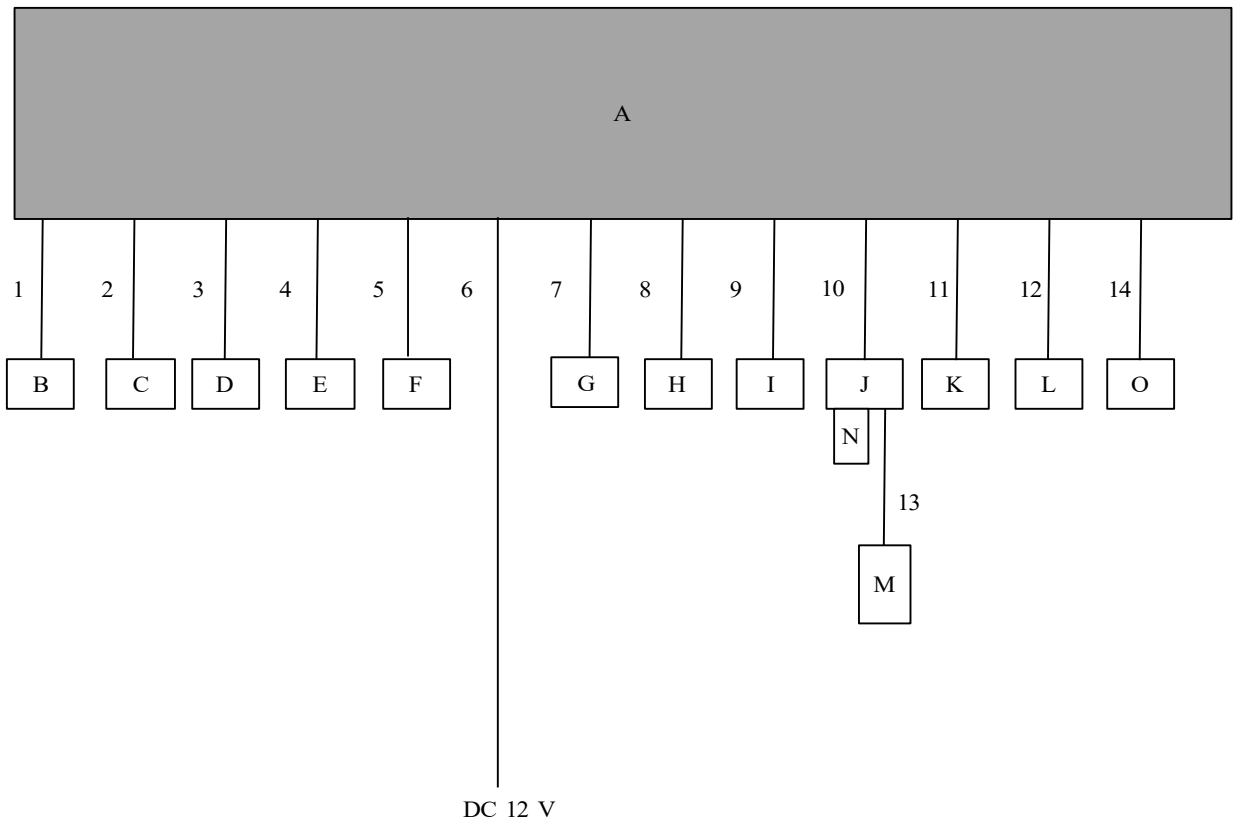

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Car Audio	TN0023A	AT300013	DENSO TEN Limited	EUT
B	Switch	-	-	-	-
C	DCM	19MC_DCM	E-033720026/006	DENSO Corporation	-
D	Steering Switch	PA6-GF30	48	TOYOTA	-
E	Low noise Amp	ZX60-242GLN-S+	S 2036302044	Mini-Circuits	-
F	GPS Antenna	23D90058	No.17	yokowo co.,ltd.	-
G	FM/AM connector (Main)	86300-30C30	PS600112	DENSO TEN Limited	-
H	FM/AM connector (Sub)	86300-30C70	PS6020494	DENSO TEN Limited	-
I	Back Camera	GP-KD7301RC	64F000037	Panasonic	-
J	USB/AUX socket	86190-12040	No.17	Kojima Industries Corporation	-
K	Mic	SDA3510A	0DC040830	Panasonic	-
L	Mic	SDA3510A	0DC040817	Panasonic	-
M	iPod touch	A1367	CCQ50WDDCPC	Apple	-
N	USB Memory	USM4GR B	17116 DGGNN	SONY	-
O	Speaker Dummy	-	-	-	-

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	Signal Cable	2.4	Unshielded	Unshielded	-
2	Signal Cable	2.4	Unshielded	Unshielded	-
3	Signal Cable	2.4	Unshielded	Unshielded	-
4	Signal Cable	1.0	Unshielded	Unshielded	-
5	GNSS Antenna Cable	2.6	Shielded	Shielded	-
6	DC Cable	3.4	Unshielded	Unshielded	-
7	Signal Cable	2.6	Unshielded	Unshielded	-
8	Signal Cable	2.6	Unshielded	Unshielded	-
9	Signal Cable	2.4	Unshielded	Unshielded	-
10	USB Cable	3.2	Shielded	Shielded	-
11	Signal Cable	2.7	Unshielded	Unshielded	-
12	Signal Cable	2.7	Unshielded	Unshielded	-
13	Audio Cable	1.5	Shielded	Shielded	-
14	Speaker Cable	3.2	Unshielded	Unshielded	-

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 5: Radiated Spurious Emission

Test Procedure

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9 (ISED) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (ISED).

Frequency	Below 1 GHz	Above 1 GHz		20 dBc
Instrument used	Test Receiver	Spectrum Analyzer *a)		Spectrum Analyzer
Detector	QP	PK	AV *1)	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (RMS) Trace: 100 traces Duty factor was added to the results.	RBW: 100 kHz VBW: 300 kHz

*1) Average Power Measurement was performed based on KDB 558074 D01 15.247 Meas Guidance v05r02.

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Figure 1: Test Setup


Below 1 GHz

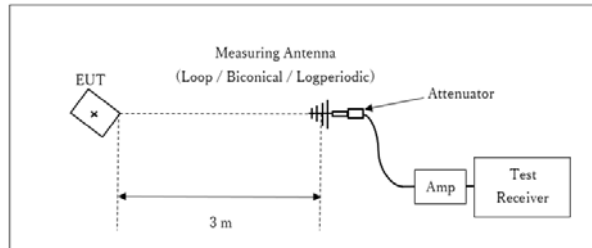

× : Center of turn table

Test Distance: 3 m

1 GHz - 10 GHz

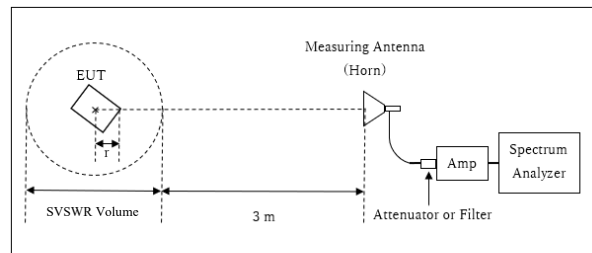

r : Radius of an outer periphery of EUT

× : Center of turn table

Distance Factor: $20 \times \log (3.6 \text{ m} / 3.0 \text{ m}) = 1.59 \text{ dB}$


* Test Distance: $(3 + \text{SVSWR Volume} / 2) - r = 3.6 \text{ m}$

SVSWR Volume : 1.5 m

(SVSWR Volume has been calibrated based on CISPR 16-1-4.)

$r = 0.15 \text{ m}$

10 GHz - 26.5 GHz

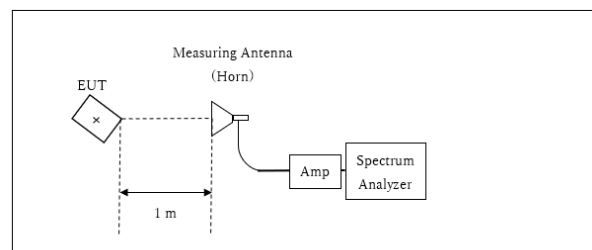

× : Center of turn table

Distance Factor: $20 \times \log (1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

* Test Distance: 1 m

The test was made on EUT at the normal use position.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range : 30 MHz - 26.5 GHz

Test data : APPENDIX

Test result : Pass

SECTION 6: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument used
20dB Bandwidth	3 MHz	30 kHz	100 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak Average *2)	-	Power Meter (Sensor: 50MHz BW)
Carrier Frequency Separation	3 MHz	30 kHz	100 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Number of Hopping Frequency	30 MHz	200 kHz	620 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Dwell Time	Zero Span	100 kHz, 1 MHz	300 kHz, 3 MHz	As necessary capture the entire dwell time per hopping channel	Peak	Clear Write	Spectrum Analyzer
Conducted Spurious Emission *3) *4)	9 kHz to 150 kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150 kHz to 30 MHz	9.1 kHz	27 kHz				
	30 MHz to 25 GHz	100 kHz	300 kHz				
Conducted Spurious Emission Band Edge compliance	10 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer

*1) Peak hold was applied as Worst-case measurement.

*2) Reference data

*3) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.

Then, wide-band noise near the limit was checked separately, however the noise was low enough as shown in the chart.

(9 kHz - 150 kHz: RBW = 200 Hz, 150 kHz - 30 MHz: RBW = 9.1 kHz).

*4) The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to $45.5 - 51.5 = -6.0$ dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

The test results and limit are rounded off to two decimals place, so some differences might be observed.

The equipment and cables were not used for factor 0 dB of the data sheets.

Test data : APPENDIX

Test result : Pass

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

APPENDIX 1: Test data

20dB Bandwidth, 99% Occupied Bandwidth and Carrier Frequency Separation


Report No. 14011106H
Test place Ise EMC Lab. No.8 Measurement Room
Date September 21, 2021
Temperature / Humidity 22 deg. C / 68 % RH
Engineer Ken Fujita
Mode Tx, Hopping Off, Tx, Hopping On

Mode	Freq. [MHz]	20 dB Bandwidth [MHz]	99 % Occupied Bandwidth [kHz]	Carrier Frequency Separation [MHz]	Limit for Carrier Frequency separation [MHz]
DH5	2402.0	0.951	883.899	1.000	≥ 0.634
DH5	2441.0	0.946	885.235	1.000	≥ 0.631
DH5	2480.0	0.956	886.692	1.000	≥ 0.637
DH5	Hopping On	-	78584.0	-	-
3DH5	2402.0	1.290	1170.4	1.000	≥ 0.860
3DH5	2441.0	1.288	1171.2	1.000	≥ 0.859
3DH5	2480.0	1.293	1172.8	1.000	≥ 0.862
3DH5	Hopping On	-	78603.9	-	-

Limit: Two-thirds of 20 dB Bandwidth or 25 kHz (whichever is greater).

No limit applies to 20 dB Bandwidth.

20dB Bandwidth and 99% Occupied Bandwidth

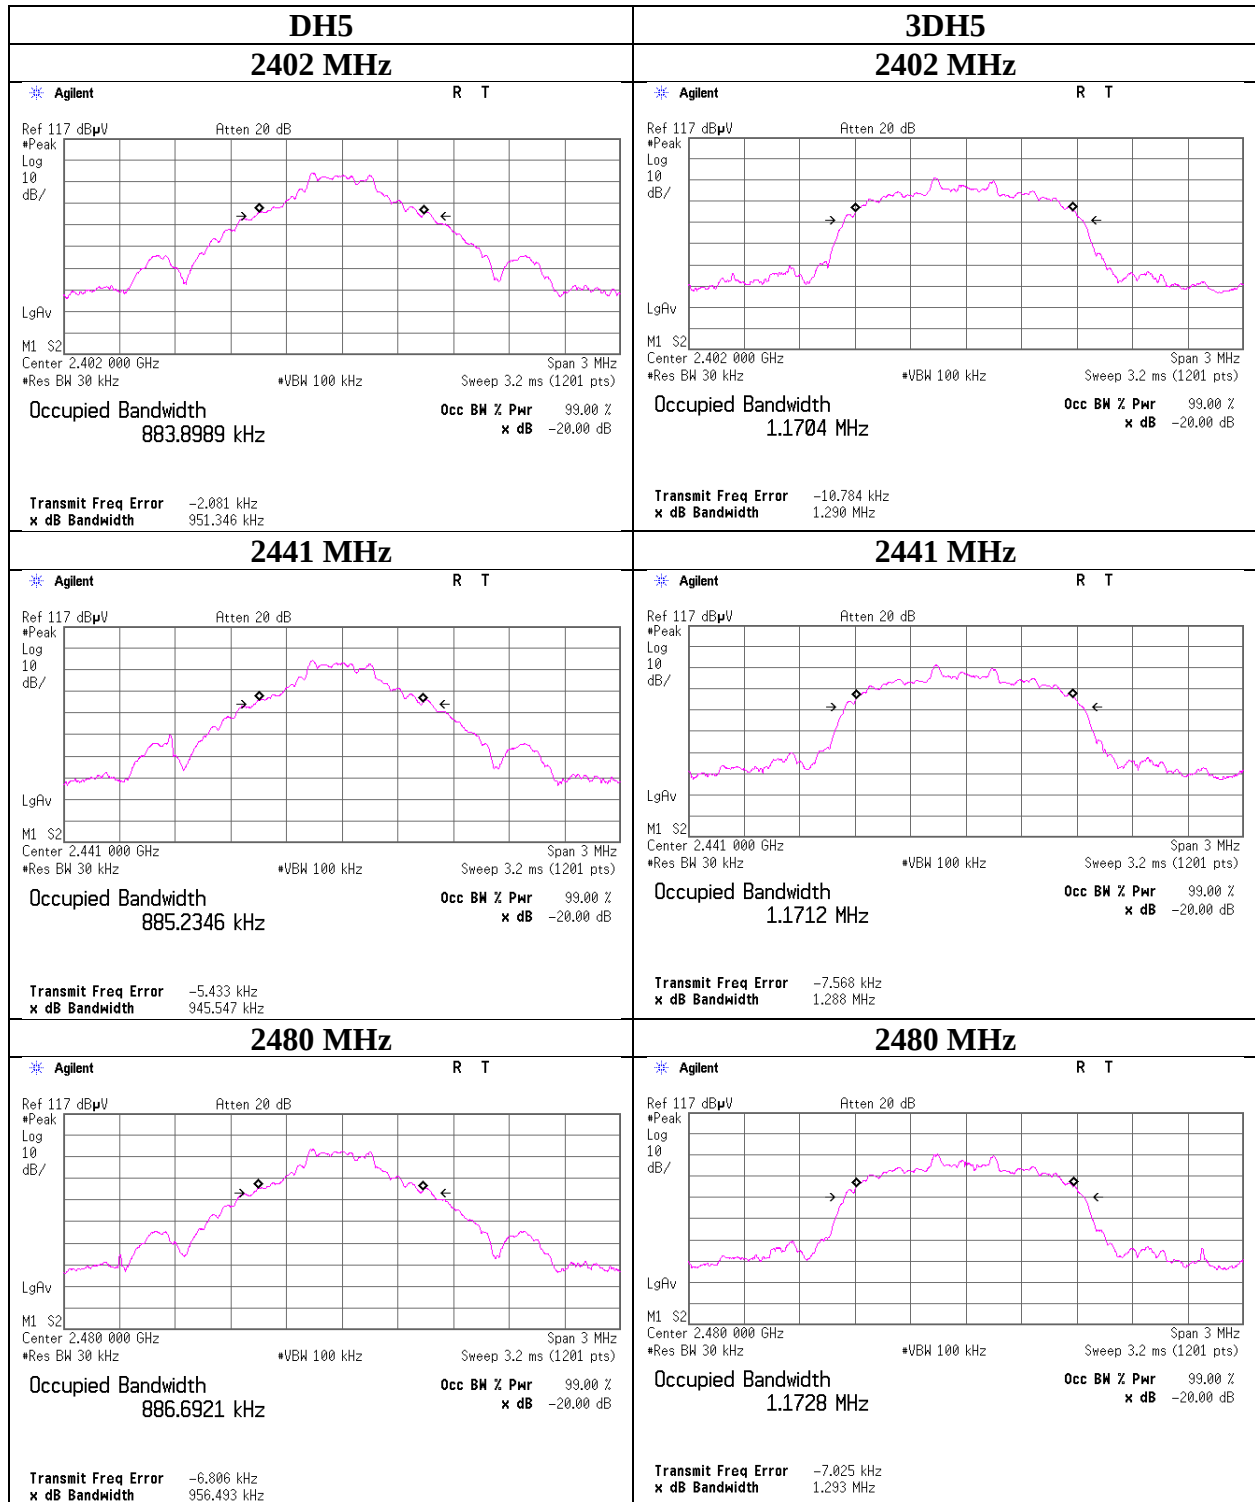

UL Japan, Inc.


Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

20dB Bandwidth and 99% Occupied Bandwidth

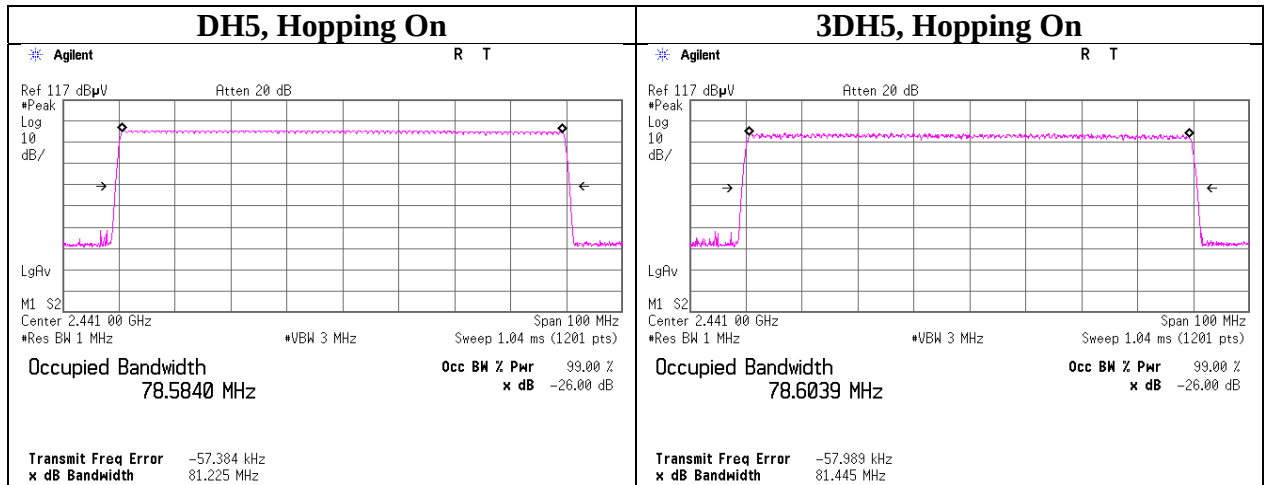

UL Japan, Inc.


Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Carrier Frequency Separation

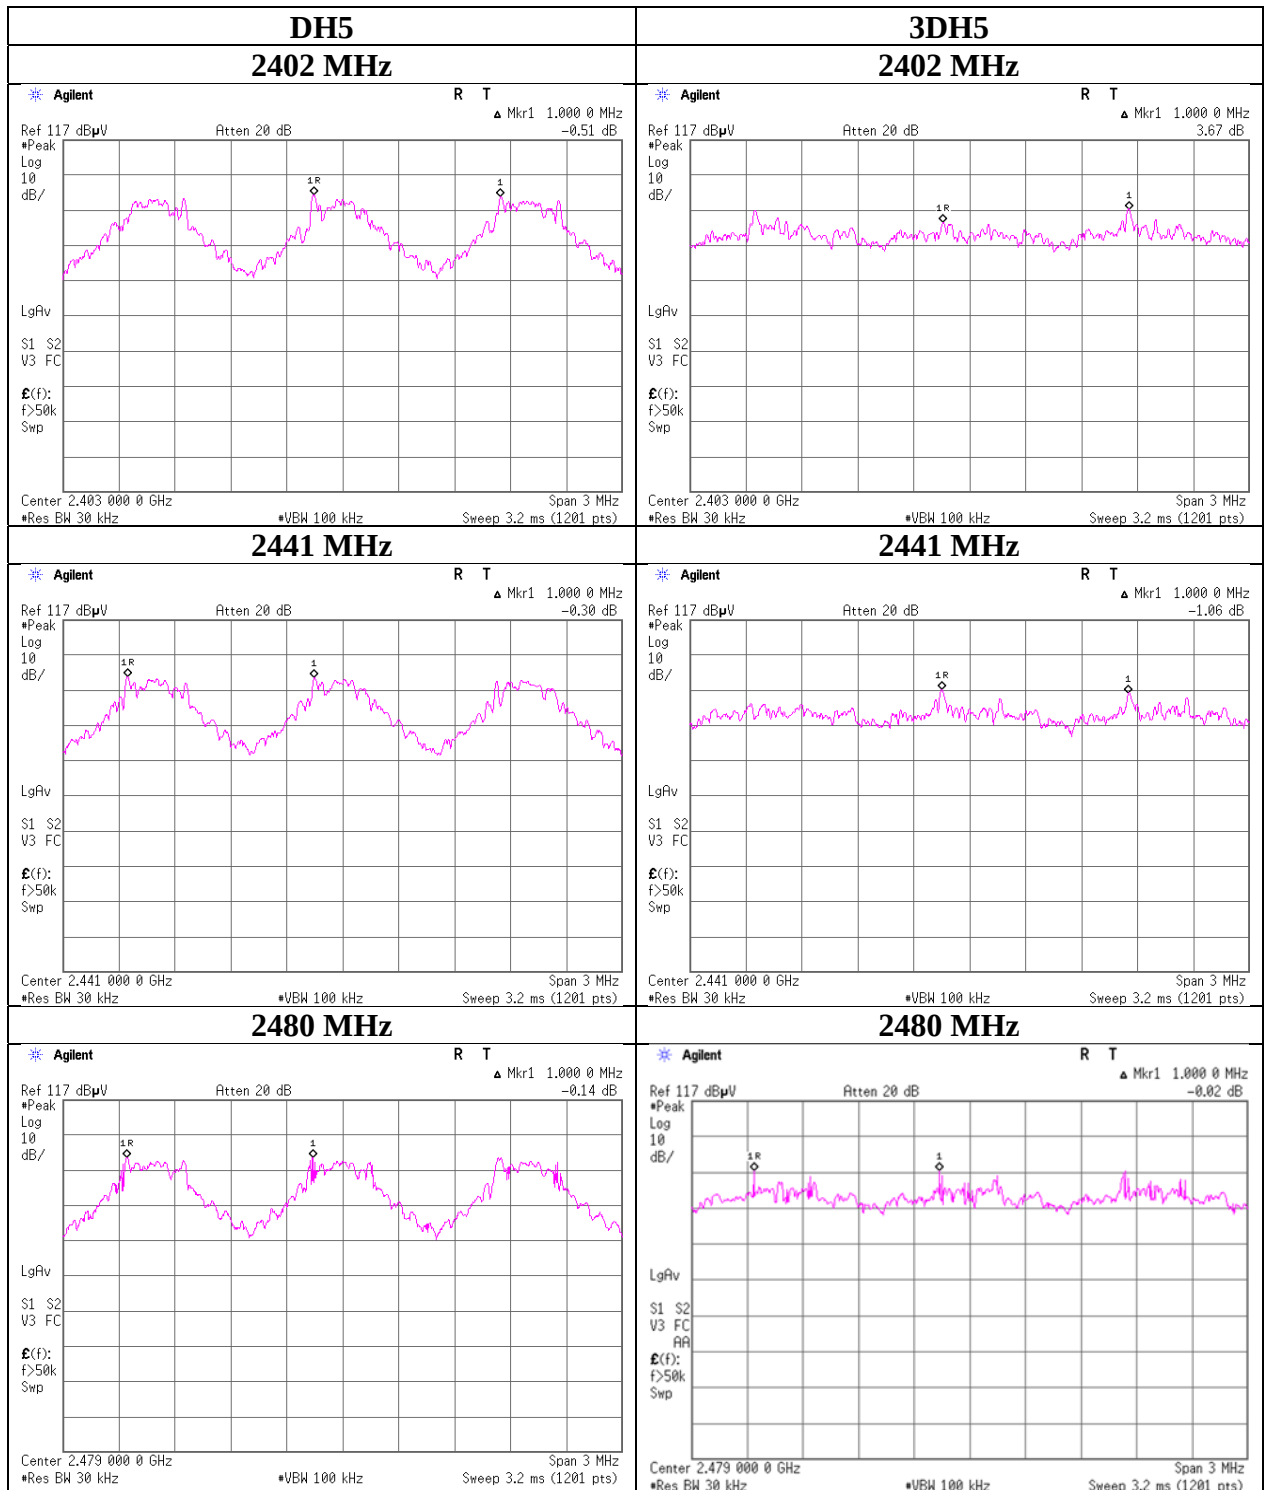

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124


Number of Hopping Frequency

Report No. 14011106H
Test place Ise EMC Lab. No.8 Measurement Room
Date September 21, 2021
Temperature / Humidity 22 deg. C / 68 % RH
Engineer Ken Fujita
Mode Tx, Hopping On

Mode	Number of channel [channels]	Limit [channels]
DH5	79	≥ 15
3DH5	79	≥ 15

Test was not performed at AFH mode whose number of hopping channel is 20 channels because this Bluetooth radio is in compliance of Bluetooth Specification.

Number of Hopping Frequency

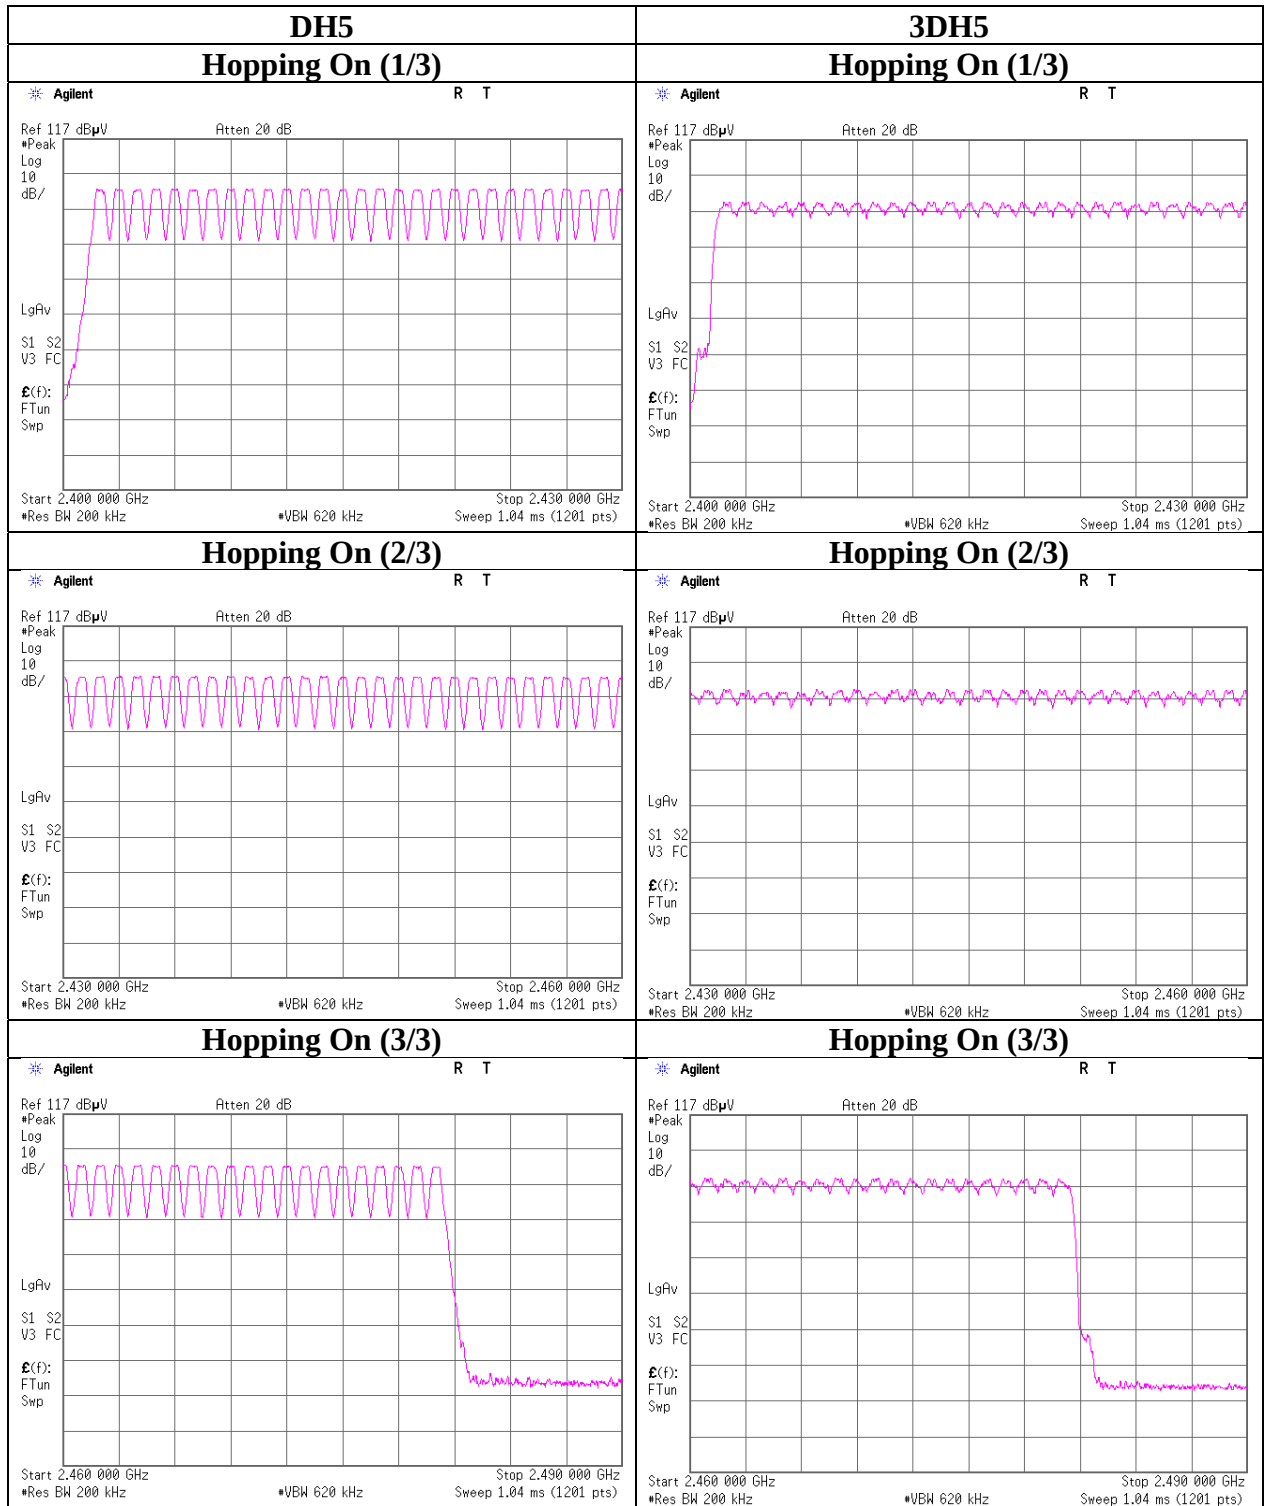

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Dwell time

Report No.	14011106H
Test place	Ise EMC Lab. No.8 Measurement Room
Date	September 21, 2021
Temperature / Humidity	22 deg. C / 68 % RH
Engineer	Ken Fujita
Mode	Tx, Hopping On

Mode	Number of transmission in a 31.6(79 Hopping x 0.4) / 12.8 (32 Hopping x 0.4) second period				Length of transmission [msec]	Result [msec]	Limit [msec]
DH1	50.4 times	/	5 sec.	x 31.6 sec. = 319 times	0.406	130	400
DH3	29.8 times	/	5 sec.	x 31.6 sec. = 189 times	1.669	315	400
DH5	21.4 times	/	5 sec.	x 31.6 sec. = 136 times	2.920	397	400
3DH1	51.8 times	/	5 sec.	x 31.6 sec. = 328 times	0.408	134	400
3DH3	28.4 times	/	5 sec.	x 31.6 sec. = 180 times	1.664	300	400
3DH5	21.4 times	/	5 sec.	x 31.6 sec. = 136 times	2.917	397	400

Sample Calculation

Result = Number of transmission x Length of transmission

*Average data of 5 tests.(except Inquiry)

Mode	Sampling [times]					Average [times]
	1	2	3	4	5	
DH1	50	51	50	50	51	50.4
DH3	26	31	30	29	33	29.8
DH5	20	19	24	22	22	21.4
3DH1	52	52	52	52	51	51.8
3DH3	24	28	31	28	31	28.4
3DH5	23	23	20	20	21	21.4

Sample Calculation

Average = Summation (Sampling 1 to 5) / 5

This device complies with the Bluetooth protocol for FHSS operation, employing a pseudo random channel selection and hopping rate to ensure that the occupancy time in $N \times 0.4s$, where N is the number of channels being used in the hopping sequence ($20 \leq N \leq 79$), is always less than $0.4s$ regardless of packet size. This is confirmed in the test report for $N = 79$.

UL Japan, Inc.


Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Dwell time

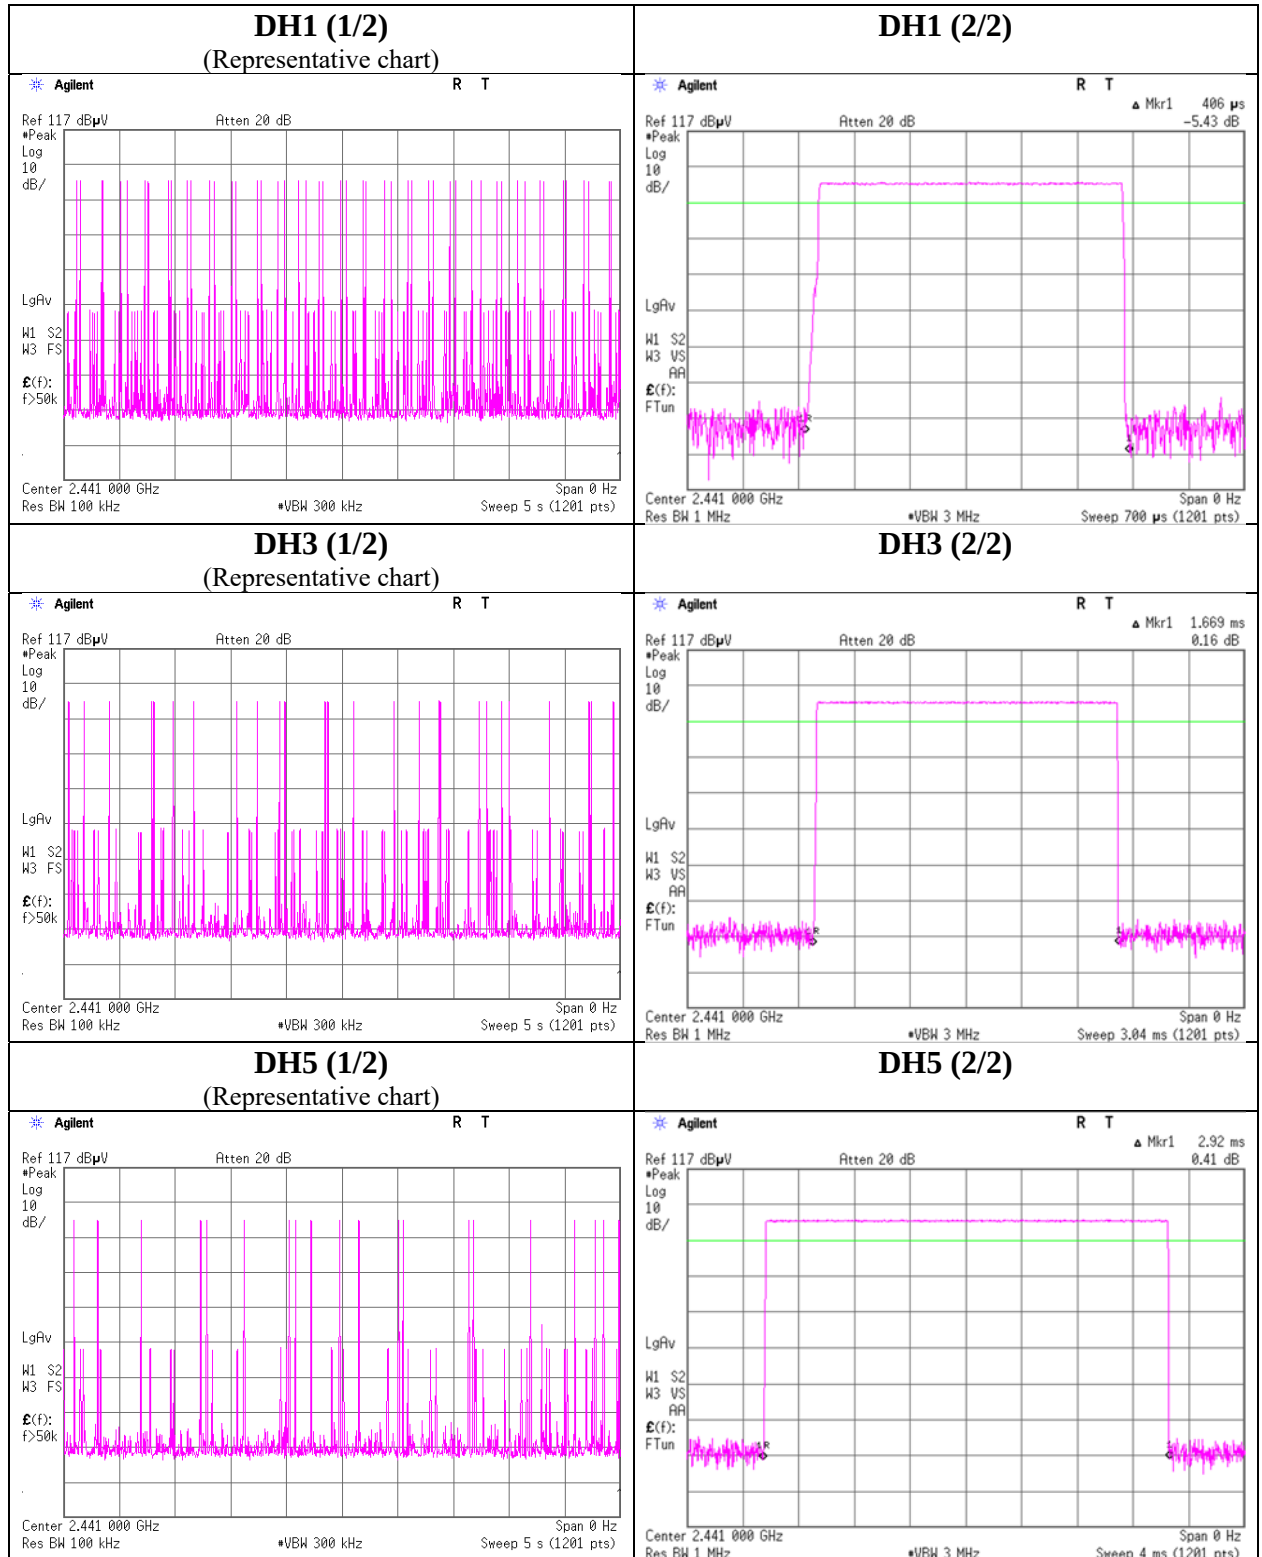

UL Japan, Inc.


Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Dwell time

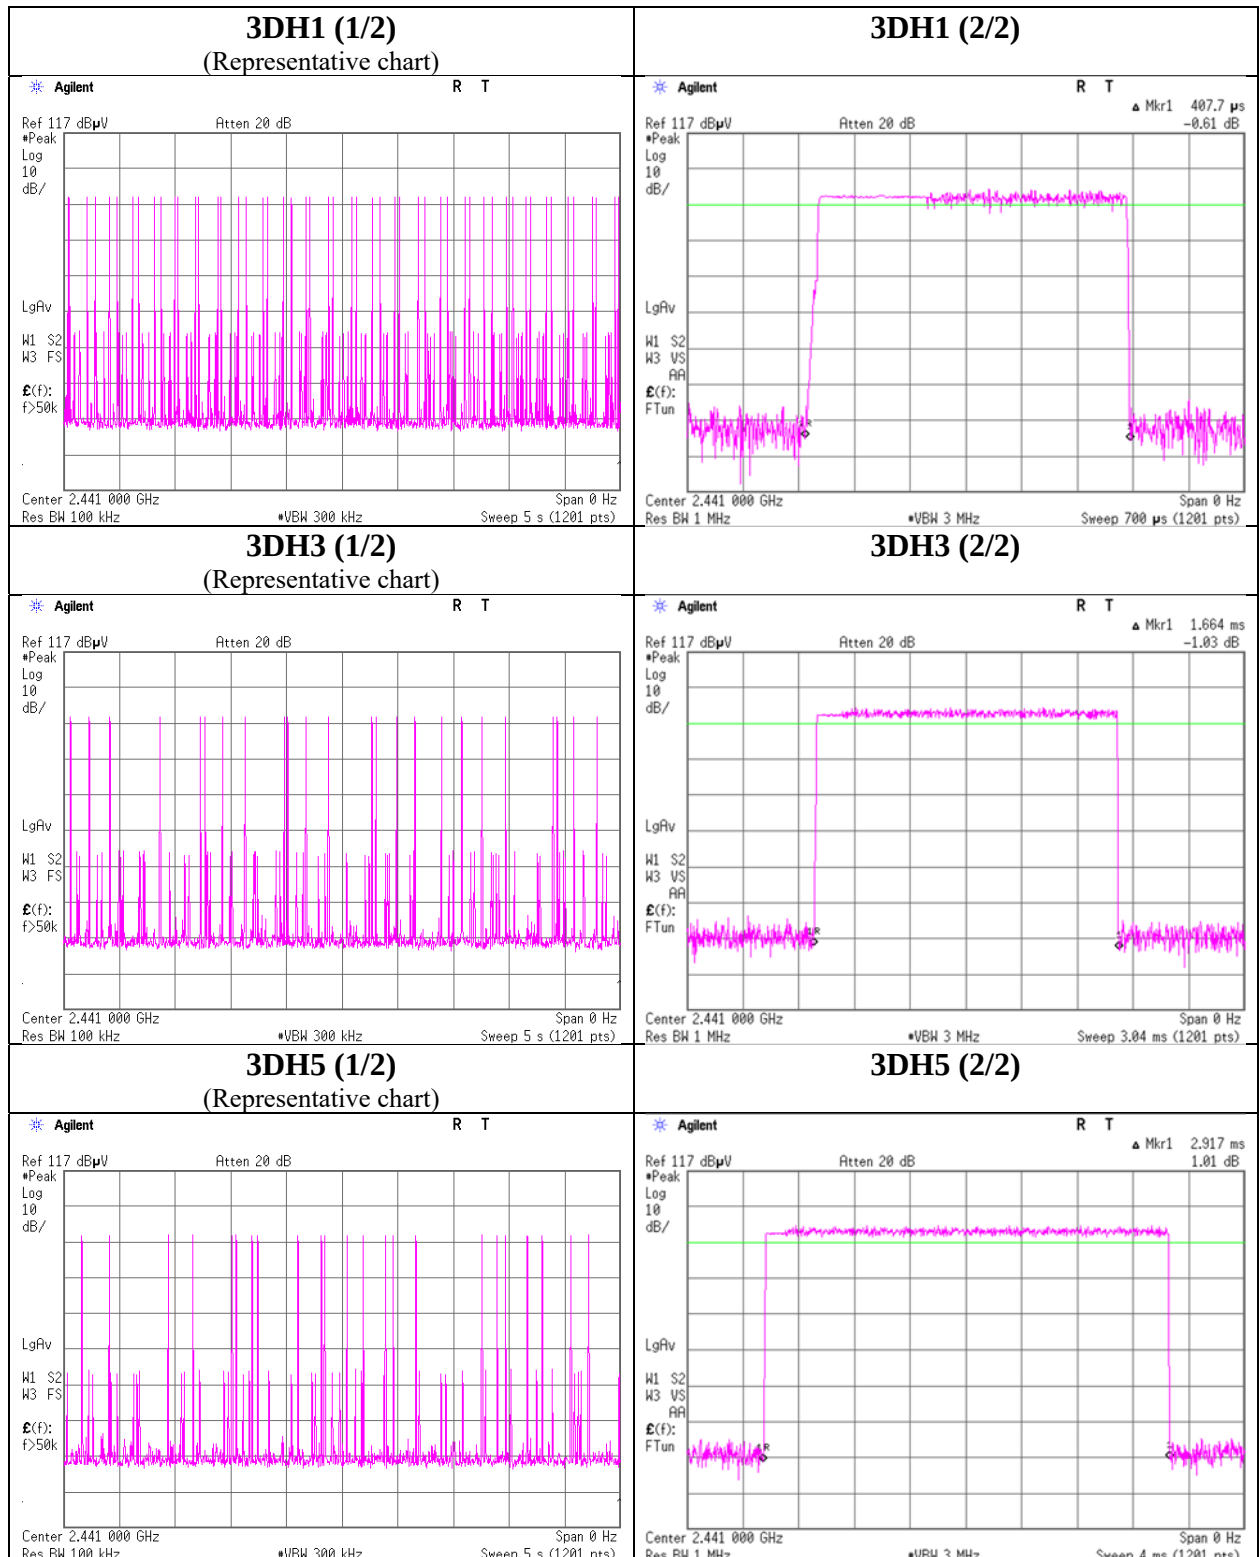

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Maximum Peak Output Power

Report No. 14011106H
Test place Ise EMC Lab. No.8 Measurement Room
Date September 17, 2021
Temperature / Humidity 23 deg. C / 66 % RH
Engineer Yuichiro Yamazaki
Mode Tx, Hopping Off

Mode	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Conducted Power					e.i.r.p. for RSS-247					
					Result		Limit		Margin	Antenna Gain [dBi]	Result		Limit		Margin
					[dBm]	[mW]	[dBm]	[mW]			[dBm]	[mW]	[dBm]	[mW]	
DH5	2402.0	-4.18	1.89	10.04	7.75	5.96	20.96	125	13.21	0.70	8.45	7.00	36.02	4000	27.57
DH5	2441.0	-4.24	1.91	10.04	7.71	5.90	20.96	125	13.25	0.70	8.41	6.93	36.02	4000	27.61
DH5	2480.0	-4.77	1.92	10.04	7.19	5.24	20.96	125	13.77	0.70	7.89	6.15	36.02	4000	28.13
2DH5	2402.0	-5.52	1.89	10.04	6.41	4.38	20.96	125	14.55	0.70	7.11	5.14	36.02	4000	28.91
2DH5	2441.0	-5.54	1.91	10.04	6.41	4.38	20.96	125	14.55	0.70	7.11	5.14	36.02	4000	28.91
2DH5	2480.0	-6.08	1.92	10.04	5.88	3.87	20.96	125	15.08	0.70	6.58	4.55	36.02	4000	29.44
3DH5	2402.0	-5.00	1.89	10.04	6.93	4.93	20.96	125	14.03	0.70	7.63	5.79	36.02	4000	28.39
3DH5	2441.0	-4.94	1.91	10.04	7.01	5.02	20.96	125	13.95	0.70	7.71	5.90	36.02	4000	28.31
3DH5	2480.0	-5.48	1.92	10.04	6.48	4.45	20.96	125	14.48	0.70	7.18	5.22	36.02	4000	28.84

Sample Calculation:

Result = Reading + Cable Loss + Attenuator Loss

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Test was not performed at AFH mode, because the decrease of number of channel (min: 20ch) at AFH mode does not influence on the output power and bandwidth of the EUT.

As this device had AFH mode and frequency separation could not meet the requirement of over 20dB BW without 2/3 relaxation, 125mW power limit was applied to it.

Average Output Power (Reference data for RF Exposure)

Report No.	14011106H
Test place	Ise EMC Lab. No.8 Measurement Room
Date	September 17, 2021
Temperature / Humidity	23 deg. C / 66 % RH
Engineer	Yuichiro Yamazaki
Mode	Tx, Hopping Off

Mode	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
					[dBm]	[mW]		[dBm]	[mW]
DH5	2402.0	-5.52	1.89	10.04	6.41	4.38	1.11	7.52	5.65
DH5	2441.0	-5.64	1.91	10.04	6.31	4.28	1.11	7.42	5.52
DH5	2480.0	-6.17	1.92	10.04	5.79	3.79	1.11	6.90	4.90
2DH5	2402.0	-9.27	1.89	10.04	2.66	1.85	1.11	3.77	2.38
2DH5	2441.0	-9.30	1.91	10.04	2.65	1.84	1.11	3.76	2.38
2DH5	2480.0	-9.86	1.92	10.04	2.10	1.62	1.11	3.21	2.09
3DH5	2402.0	-9.25	1.89	10.04	2.68	1.85	1.11	3.79	2.39
3DH5	2441.0	-9.24	1.91	10.04	2.71	1.87	1.11	3.82	2.41
3DH5	2480.0	-9.68	1.92	10.04	2.28	1.69	1.11	3.39	2.18

Sample Calculation:

Result (Time average) = Reading + Cable Loss + Attenuator Loss


Result (Burst power average) = Time average + Duty factor

*The equipment and cables were not used for factor 0 dB of the data sheets.


Burst Rate Confirmation

Report No. 14011106H
Test place Ise EMC Lab. No.2 Semi Anechoic Chamber
Date September 16, 2021
Temperature / Humidity 24 deg. C / 66 % RH
Engineer Kiyoshiro Okazaki
Mode Tx, Hopping Off


DH5

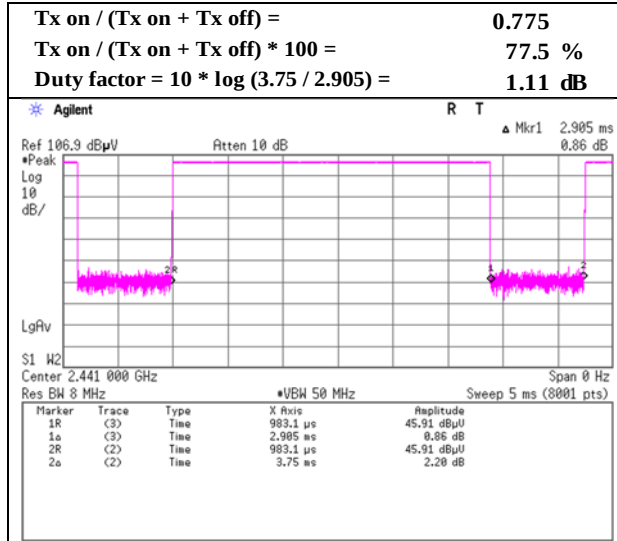

2DH5

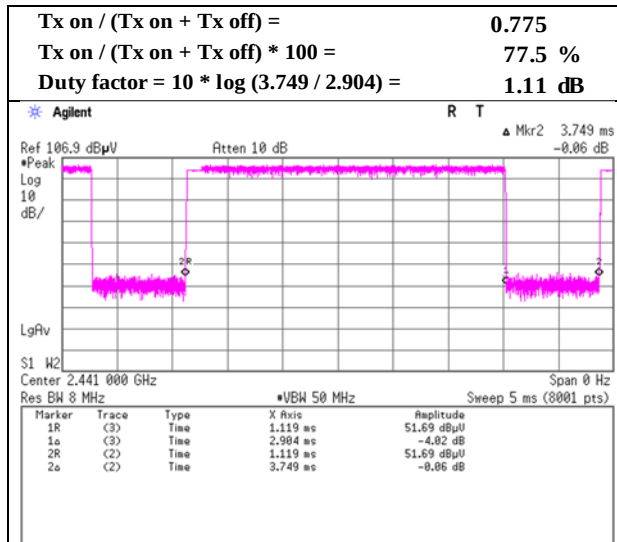

3DH5

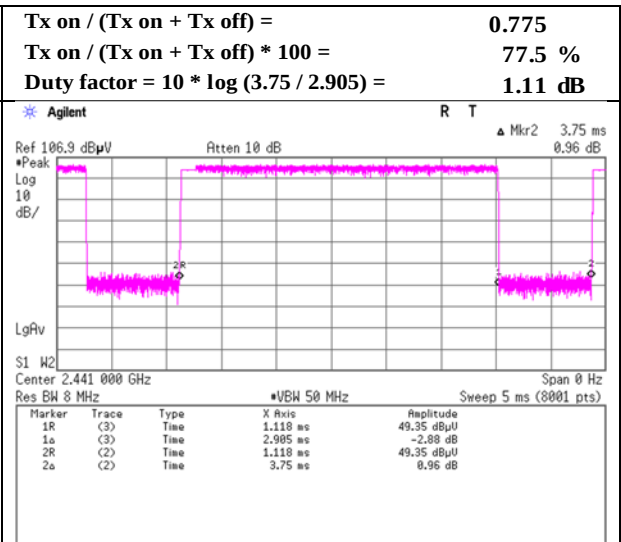

Radiated Spurious Emission

Report No. 14011106H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.2
Date September 16, 2021 September 17, 2021 September 18, 2021
Temperature / Humidity 22 deg. C / 51 % RH 22 deg. C / 51 % RH 20 deg. C / 60 % RH
Engineer Junya Okuno Junya Okuno Junya Okuno
(1 GHz - 10 GHz) (10 GHz - 26.5 GHz) (Below 1 GHz)
Mode Tx, Hopping Off, DH5 2402 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	30.000	QP	22.2	19.1	6.7	28.5	-	19.5	40.0	20.5	
Hori.	33.398	QP	22.3	17.5	6.8	28.5	-	18.1	40.0	21.9	
Hori.	200.000	QP	21.8	16.6	8.2	27.9	-	18.8	43.5	24.7	
Hori.	232.840	QP	28.0	12.5	8.4	27.7	-	21.1	46.0	24.9	
Hori.	260.339	QP	24.0	12.8	8.6	27.7	-	17.7	46.0	28.3	
Hori.	913.961	QP	26.3	22.3	11.4	28.7	-	31.2	46.0	14.8	
Hori.	1579.948	PK	60.4	25.3	4.1	35.1	-	54.6	73.9	19.3	
Hori.	2390.000	PK	46.2	27.6	4.7	34.6	-	43.9	73.9	30.0	
Hori.	4804.000	PK	43.2	31.6	6.8	33.7	-	47.8	73.9	26.1	Floor noise
Hori.	5000.000	PK	49.5	31.6	6.8	33.8	-	54.1	73.9	19.9	
Hori.	7206.000	PK	44.1	35.8	8.1	33.6	-	54.5	73.9	19.4	Floor noise
Hori.	9608.000	PK	45.8	38.6	8.6	34.2	-	58.8	73.9	15.2	Floor noise
Hori.	10000.000	PK	49.7	39.3	-2.5	34.3	-	52.2	73.9	21.7	
Hori.	1579.948	AV	49.8	25.3	4.1	35.1	-	44.0	53.9	9.9	
Hori.	2390.000	AV	34.7	27.6	4.7	34.6	1.1	33.4	53.9	20.5	*1)
Hori.	4804.000	AV	34.5	31.6	6.8	33.7	-	39.1	53.9	14.8	Floor noise
Hori.	5000.000	AV	45.7	31.6	6.8	33.8	-	50.2	53.9	3.7	
Hori.	7206.000	AV	35.6	35.8	8.1	33.6	-	45.9	53.9	8.0	Floor noise
Hori.	9608.000	AV	34.2	38.6	8.6	34.2	-	47.2	53.9	6.7	Floor noise
Hori.	10000.000	AV	45.3	39.3	-2.5	34.3	-	47.9	53.9	6.0	
Vert.	30.000	QP	22.2	19.1	6.7	28.5	-	19.5	40.0	20.5	
Vert.	33.398	QP	22.6	17.5	6.8	28.5	-	18.4	40.0	21.6	
Vert.	200.000	QP	21.9	16.6	8.2	27.9	-	18.9	43.5	24.6	
Vert.	232.840	QP	24.9	12.5	8.4	27.7	-	18.0	46.0	28.0	
Vert.	260.339	QP	23.0	12.8	8.6	27.7	-	16.7	46.0	29.3	
Vert.	913.961	QP	25.1	22.3	11.4	28.7	-	30.0	46.0	16.0	
Vert.	1579.948	PK	62.9	25.3	4.1	35.1	-	57.1	73.9	16.8	
Vert.	2390.000	PK	46.2	27.6	4.7	34.6	-	43.8	73.9	30.1	
Vert.	4804.000	PK	43.0	31.6	6.8	33.7	-	47.6	73.9	26.3	Floor noise
Vert.	5000.000	PK	49.5	31.6	6.8	33.8	-	54.0	73.9	19.9	
Vert.	7206.000	PK	43.6	35.8	8.1	33.6	-	54.0	73.9	19.9	Floor noise
Vert.	9608.000	PK	45.4	38.6	8.6	34.2	-	58.4	73.9	15.5	Floor noise
Vert.	10000.000	PK	47.1	39.3	-2.5	34.3	-	49.7	73.9	24.2	
Vert.	1579.948	AV	50.2	25.3	4.1	35.1	-	44.4	53.9	9.5	
Vert.	2390.000	AV	36.5	27.6	4.7	34.6	1.1	35.3	53.9	18.6	*1)
Vert.	4804.000	AV	34.5	31.6	6.8	33.7	-	39.1	53.9	14.8	Floor noise
Vert.	5000.000	AV	45.7	31.6	6.8	33.8	-	50.2	53.9	3.7	
Vert.	7206.000	AV	35.4	35.8	8.1	33.6	-	45.8	53.9	8.1	Floor noise
Vert.	9608.000	AV	34.2	38.6	8.6	34.2	-	47.1	53.9	6.8	Floor noise
Vert.	10000.000	AV	42.0	39.3	-2.5	34.3	-	44.6	53.9	9.3	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.6\text{ m} / 3.0\text{ m}) = 1.59\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

*1) Not Out of Band emission(Leakage Power)

20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	103.4	27.5	4.7	34.6	101.0	-	-	Carrier
Hori.	2400.000	PK	44.9	27.6	4.7	34.6	42.5	81.0	38.5	
Vert.	2402.000	PK	103.1	27.5	4.7	34.6	100.7	-	-	Carrier
Vert.	2400.000	PK	43.1	27.6	4.7	34.6	40.7	80.7	40.0	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

***These results have sufficient margin without taking account Duty cycle correction factor.**

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission (Reference Plot for band-edge)

Report No.	14011106H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	September 16, 2021
Temperature / Humidity	22 deg. C / 51 % RH
Engineer	Junya Okuno
	(1 GHz - 10 GHz)
Mode	Tx, Hopping Off, DH5 2402 MHz

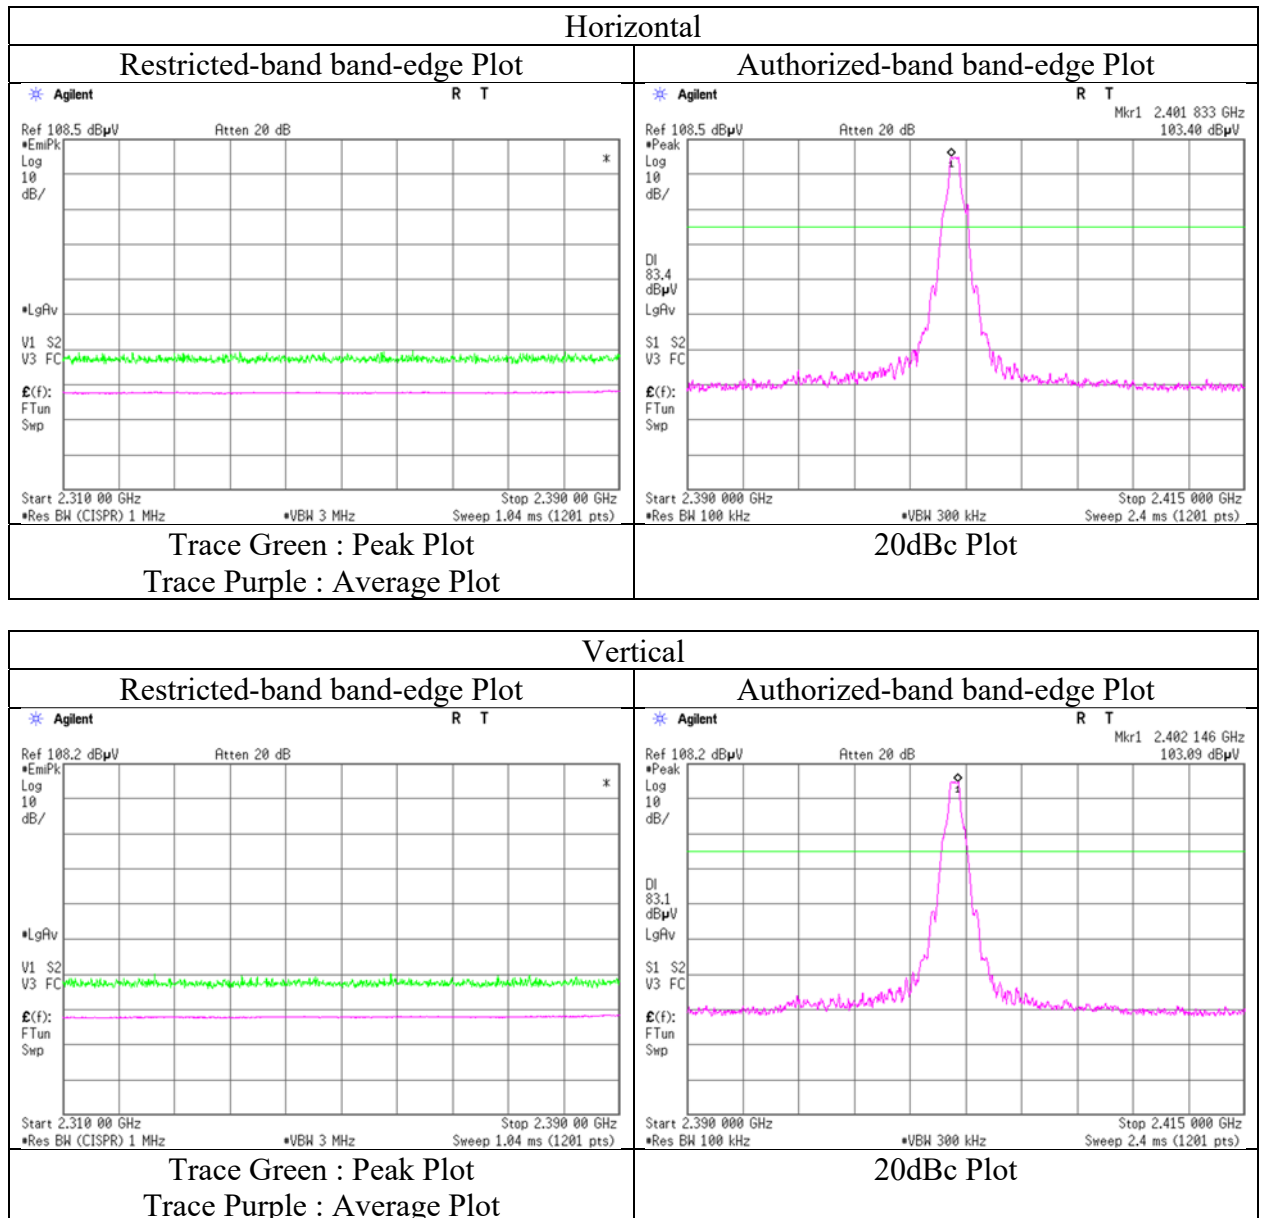

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No.	14011106H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.2	No.2	No.2
Date	September 16, 2021	September 17, 2021	September 18, 2021
Temperature / Humidity	22 deg. C / 51 % RH	22 deg. C / 51 % RH	20 deg. C / 60 % RH
Engineer	Junya Okuno	Junya Okuno	Junya Okuno
	(1 GHz - 10 GHz)	(10 GHz - 26.5 GHz)	(Below 1 GHz)
Mode	Tx, Hopping Off, DH5 2441 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	30.000	QP	22.3	19.1	6.7	28.5	-	19.6	40.0	20.4	
Hori.	33.398	QP	22.4	17.5	6.8	28.5	-	18.2	40.0	21.8	
Hori.	200.000	QP	21.9	16.6	8.2	27.9	-	18.9	43.5	24.6	
Hori.	232.840	QP	28.3	12.5	8.4	27.7	-	21.4	46.0	24.6	
Hori.	260.339	QP	24.2	12.8	8.6	27.7	-	17.9	46.0	28.1	
Hori.	913.961	QP	26.1	22.3	11.4	28.7	-	31.0	46.0	15.0	
Hori.	1579.948	PK	61.3	25.3	4.1	35.1	-	55.5	73.9	18.4	
Hori.	4882.000	PK	43.6	31.6	6.8	33.8	-	48.1	73.9	25.8	Floor noise
Hori.	5000.000	PK	48.5	31.6	6.8	33.8	-	53.0	73.9	20.9	
Hori.	7323.000	PK	42.8	36.2	8.1	33.6	-	53.4	73.9	20.5	Floor noise
Hori.	9764.000	PK	45.1	38.9	8.6	34.2	-	58.3	73.9	15.6	Floor noise
Hori.	10000.000	PK	49.5	39.3	-2.5	34.3	-	52.0	73.9	21.9	
Hori.	1579.948	AV	50.7	25.3	4.1	35.1	-	44.9	53.9	9.0	
Hori.	4882.000	AV	34.4	31.6	6.8	33.8	-	39.0	53.9	15.0	Floor noise
Hori.	5000.000	AV	45.0	31.6	6.8	33.8	-	49.6	53.9	4.4	
Hori.	7323.000	AV	34.5	36.2	8.1	33.6	-	45.2	53.9	8.7	Floor noise
Hori.	9764.000	AV	34.6	38.9	8.6	34.2	-	47.8	53.9	6.1	Floor noise
Hori.	10000.000	AV	45.1	39.3	-2.5	34.3	-	47.7	53.9	6.2	
Vert.	30.000	QP	22.1	19.1	6.7	28.5	-	19.4	40.0	20.6	
Vert.	33.398	QP	22.8	17.5	6.8	28.5	-	18.6	40.0	21.4	
Vert.	200.000	QP	21.8	16.6	8.2	27.9	-	18.8	43.5	24.7	
Vert.	232.840	QP	25.1	12.5	8.4	27.7	-	18.2	46.0	27.8	
Vert.	260.339	QP	22.8	12.8	8.6	27.7	-	16.5	46.0	29.5	
Vert.	913.961	QP	25.3	22.3	11.4	28.7	-	30.2	46.0	15.8	
Vert.	1579.948	PK	61.4	25.3	4.1	35.1	-	55.6	73.9	18.3	
Vert.	4882.000	PK	42.6	31.6	6.8	33.8	-	47.2	73.9	26.7	Floor noise
Vert.	5000.000	PK	48.2	31.6	6.8	33.8	-	52.8	73.9	21.2	
Vert.	7323.000	PK	42.9	36.2	8.1	33.6	-	53.6	73.9	20.3	Floor noise
Vert.	9764.000	PK	44.9	38.9	8.6	34.2	-	58.1	73.9	15.9	Floor noise
Vert.	10000.000	PK	47.2	39.3	-2.5	34.3	-	49.7	73.9	24.2	
Vert.	1579.948	AV	51.1	25.3	4.1	35.1	-	45.3	53.9	8.6	
Vert.	4882.000	AV	34.3	31.6	6.8	33.8	-	38.9	53.9	15.0	Floor noise
Vert.	5000.000	AV	45.1	31.6	6.8	33.8	-	49.7	53.9	4.3	
Vert.	7323.000	AV	34.6	36.2	8.1	33.6	-	45.3	53.9	8.6	Floor noise
Vert.	9764.000	AV	34.6	38.9	8.6	34.2	-	47.8	53.9	6.1	Floor noise
Vert.	10000.000	AV	42.2	39.3	-2.5	34.3	-	44.7	53.9	9.2	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.6 m / 3.0 m) = 1.59 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

***These results have sufficient margin without taking account Duty cycle correction factor.**

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No. 14011106H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.2 No.2 No.2
Date September 16, 2021 September 17, 2021 September 18, 2021
Temperature / Humidity 22 deg. C / 51 % RH 22 deg. C / 51 % RH 20 deg. C / 60 % RH
Engineer Junya Okuno Junya Okuno Junya Okuno
(1 GHz - 10 GHz) (10 GHz - 26.5 GHz) (Below 1 GHz)
Mode Tx, Hopping Off, DH5 2480 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	30.000	QP	22.3	19.1	6.7	28.5	-	19.6	40.0	20.4	
Hori.	33.398	QP	22.3	17.5	6.8	28.5	-	18.1	40.0	21.9	
Hori.	200.000	QP	21.8	16.6	8.2	27.9	-	18.8	43.5	24.7	
Hori.	232.840	QP	23.3	12.5	8.4	27.7	-	16.4	46.0	29.6	
Hori.	260.339	QP	23.8	12.8	8.6	27.7	-	17.5	46.0	28.5	
Hori.	913.961	QP	26.6	22.3	11.4	28.7	-	31.5	46.0	14.5	
Hori.	1579.948	PK	61.3	25.3	4.1	35.1	-	55.5	73.9	18.4	
Hori.	2483.500	PK	50.2	27.4	4.7	34.6	-	47.8	73.9	26.1	
Hori.	2500.000	PK	46.5	27.4	4.7	34.6	-	44.1	73.9	29.8	
Hori.	4960.000	PK	42.8	31.6	6.8	33.8	-	47.3	73.9	26.6	Floor noise
Hori.	5000.000	PK	48.5	31.6	6.8	33.8	-	53.0	73.9	20.9	
Hori.	7440.000	PK	42.8	36.0	8.1	33.7	-	53.2	73.9	20.7	Floor noise
Hori.	9920.000	PK	45.0	38.9	8.6	34.3	-	58.3	73.9	15.6	Floor noise
Hori.	10000.000	PK	49.6	39.3	-2.5	34.3	-	52.2	73.9	21.7	
Hori.	1579.948	AV	50.7	25.3	4.1	35.1	-	44.9	53.9	9.0	
Hori.	2483.500	AV	38.5	27.4	4.7	34.6	1.1	37.2	53.9	16.7	*1)
Hori.	2500.000	AV	39.1	27.4	4.7	34.6	-	36.7	53.9	17.2	
Hori.	4960.000	AV	34.2	31.6	6.8	33.8	-	38.7	53.9	15.2	Floor noise
Hori.	5000.000	AV	44.8	31.6	6.8	33.8	-	49.4	53.9	4.5	
Hori.	7440.000	AV	34.2	36.0	8.1	33.7	-	44.6	53.9	9.3	Floor noise
Hori.	9920.000	AV	34.5	38.9	8.6	34.3	-	47.8	53.9	6.1	Floor noise
Hori.	10000.000	AV	45.0	39.3	-2.5	34.3	-	47.5	53.9	6.4	
Vert.	30.000	QP	22.2	19.1	6.7	28.5	-	19.5	40.0	20.5	
Vert.	33.398	QP	22.5	17.5	6.8	28.5	-	18.3	40.0	21.7	
Vert.	200.000	QP	22.0	16.6	8.2	27.9	-	19.0	43.5	24.5	
Vert.	232.840	QP	25.1	12.5	8.4	27.7	-	18.2	46.0	27.8	
Vert.	260.339	QP	23.0	12.8	8.6	27.7	-	16.7	46.0	29.3	
Vert.	913.961	QP	25.4	22.3	11.4	28.7	-	30.3	46.0	15.7	
Vert.	1579.948	PK	60.5	25.3	4.1	35.1	-	54.7	73.9	19.2	
Vert.	2483.500	PK	48.8	27.4	4.7	34.6	-	46.3	73.9	27.6	
Vert.	2500.000	PK	46.7	27.4	4.7	34.6	-	44.3	73.9	29.6	
Vert.	4960.000	PK	42.8	31.6	6.8	33.8	-	47.3	73.9	26.6	Floor noise
Vert.	5000.000	PK	48.5	31.6	6.8	33.8	-	53.0	73.9	20.9	
Vert.	7440.000	PK	42.6	36.0	8.1	33.7	-	53.0	73.9	20.9	Floor noise
Vert.	9920.000	PK	45.0	38.9	8.6	34.3	-	58.3	73.9	15.6	Floor noise
Vert.	10000.000	PK	47.3	39.3	-2.5	34.3	-	49.8	73.9	24.1	
Vert.	1579.948	AV	50.9	25.3	4.1	35.1	-	45.1	53.9	8.8	
Vert.	2483.500	AV	38.0	27.4	4.7	34.6	1.1	36.7	53.9	17.2	*1)
Vert.	2500.000	AV	40.4	27.4	4.7	34.6	-	38.0	53.9	16.0	
Vert.	4960.000	AV	34.5	31.6	6.8	33.8	-	39.0	53.9	14.9	Floor noise
Vert.	5000.000	AV	44.6	31.6	6.8	33.8	-	49.2	53.9	4.7	
Vert.	7440.000	AV	34.2	36.0	8.1	33.7	-	44.6	53.9	9.3	Floor noise
Vert.	9920.000	AV	34.5	38.9	8.6	34.3	-	47.8	53.9	6.1	Floor noise
Vert.	10000.000	AV	42.2	39.3	-2.5	34.3	-	44.8	53.9	9.1	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.6\text{ m} / 3.0\text{ m}) = 1.59\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

*1) Not Out of Band emission(Leakage Power)

***These results have sufficient margin without taking account Duty cycle correction factor.**

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission (Reference Plot for band-edge)

Report No.	14011106H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	September 16, 2021
Temperature / Humidity	22 deg. C / 51 % RH
Engineer	Junya Okuno
	(1 GHz - 10 GHz)
Mode	Tx, Hopping Off, DH5 2480 MHz

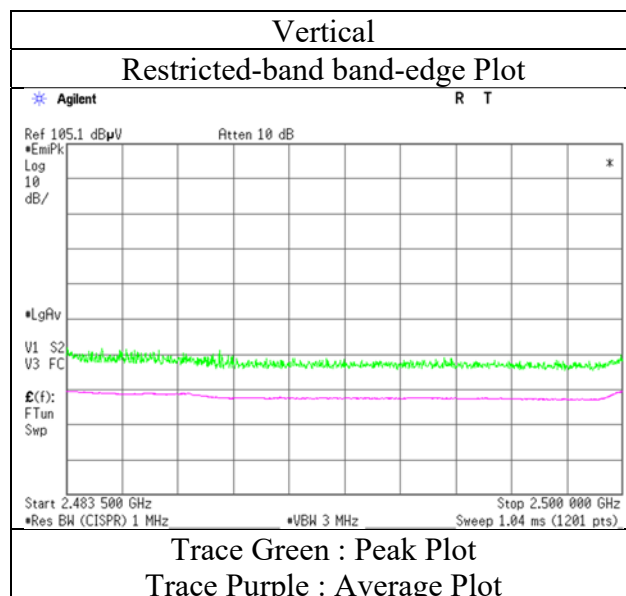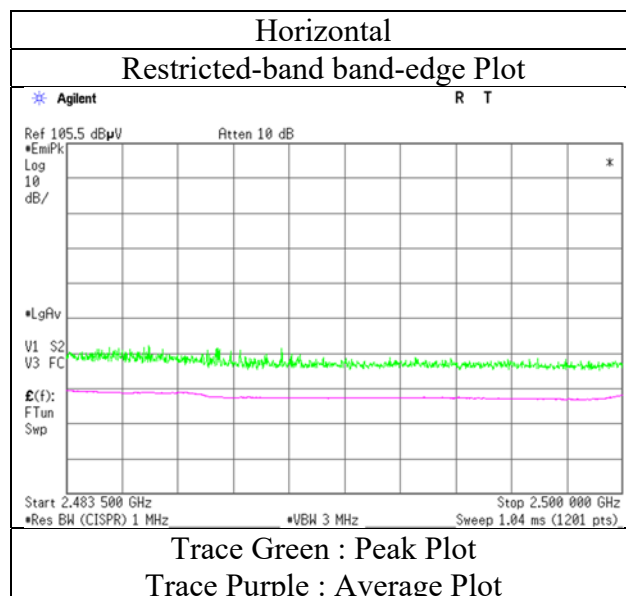

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No.	14011106H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.2	No.2	No.2
Date	September 16, 2021	September 17, 2021	September 18, 2021
Temperature / Humidity	24 deg. C / 66 % RH	22 deg. C / 51 % RH	20 deg. C / 60 % RH
Engineer	Kiyoshiro Okazaki	Junya Okuno	Junya Okuno
	(1 GHz - 10 GHz)	(10 GHz - 26.5 GHz)	(Below 1 GHz)
Mode	Tx, Hopping Off, 3DH5 2402 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	30.000	QP	22.2	19.1	6.7	28.5	-	19.5	40.0	20.5	
Hori.	33.398	QP	22.2	17.5	6.8	28.5	-	18.0	40.0	22.0	
Hori.	200.000	QP	21.9	16.6	8.2	27.9	-	18.9	43.5	24.6	
Hori.	232.840	QP	28.3	12.5	8.4	27.7	-	21.4	46.0	24.6	
Hori.	260.339	QP	23.9	12.8	8.6	27.7	-	17.6	46.0	28.4	
Hori.	913.961	QP	26.6	22.3	11.4	28.7	-	31.5	46.0	14.5	
Hori.	1579.948	PK	61.0	25.3	4.1	35.1	-	55.2	73.9	18.7	
Hori.	2390.000	PK	46.9	27.6	4.7	34.6	-	44.5	73.9	29.4	
Hori.	4804.000	PK	43.4	31.6	6.8	33.7	-	48.0	73.9	25.9	Floor noise
Hori.	5000.000	PK	50.2	31.6	6.8	33.8	-	54.7	73.9	19.2	
Hori.	7206.000	PK	44.0	35.8	8.1	33.6	-	54.4	73.9	19.5	Floor noise
Hori.	9608.000	PK	44.3	38.6	8.6	34.2	-	57.3	73.9	16.6	Floor noise
Hori.	10000.000	PK	49.3	39.3	-2.5	34.3	-	51.9	73.9	22.0	
Hori.	1579.948	AV	50.1	25.3	4.1	35.1	-	44.3	53.9	9.6	
Hori.	2390.000	AV	36.1	27.6	4.7	34.6	1.1	34.8	53.9	19.1	*1)
Hori.	4804.000	AV	34.6	31.6	6.8	33.7	-	39.2	53.9	14.8	Floor noise
Hori.	5000.000	AV	45.9	31.6	6.8	33.8	-	50.5	53.9	3.5	
Hori.	7206.000	AV	35.2	35.8	8.1	33.6	-	45.6	53.9	8.3	Floor noise
Hori.	9608.000	AV	34.5	38.6	8.6	34.2	-	47.5	53.9	6.4	Floor noise
Hori.	10000.000	AV	45.2	39.3	-2.5	34.3	-	47.7	53.9	6.2	
Vert.	30.000	QP	22.3	19.1	6.7	28.5	-	19.6	40.0	20.4	
Vert.	33.398	QP	22.8	17.5	6.8	28.5	-	18.6	40.0	21.4	
Vert.	200.000	QP	21.8	16.6	8.2	27.9	-	18.8	43.5	24.7	
Vert.	232.840	QP	25.2	12.5	8.4	27.7	-	18.3	46.0	27.7	
Vert.	260.339	QP	23.1	12.8	8.6	27.7	-	16.8	46.0	29.2	
Vert.	913.961	QP	25.5	22.3	11.4	28.7	-	30.4	46.0	15.6	
Vert.	1579.948	PK	62.9	25.3	4.1	35.1	-	57.1	73.9	16.8	
Vert.	2390.000	PK	45.4	27.6	4.7	34.6	-	43.0	73.9	30.9	
Vert.	4804.000	PK	43.4	31.6	6.8	33.7	-	48.0	73.9	25.9	Floor noise
Vert.	5000.000	PK	49.0	31.6	6.8	33.8	-	53.6	73.9	20.4	
Vert.	7206.000	PK	44.0	35.8	8.1	33.6	-	54.4	73.9	19.5	Floor noise
Vert.	9608.000	PK	44.3	38.6	8.6	34.2	-	57.3	73.9	16.6	Floor noise
Vert.	10000.000	PK	47.1	39.3	-2.5	34.3	-	49.6	73.9	24.3	
Vert.	1579.948	AV	49.8	25.3	4.1	35.1	-	44.0	53.9	9.9	
Vert.	2390.000	AV	36.2	27.6	4.7	34.6	1.1	35.0	53.9	18.9	*1)
Vert.	4804.000	AV	34.6	31.6	6.8	33.7	-	39.2	53.9	14.8	Floor noise
Vert.	5000.000	AV	46.0	31.6	6.8	33.8	-	50.5	53.9	3.4	
Vert.	7206.000	AV	35.2	35.8	8.1	33.6	-	45.6	53.9	8.3	Floor noise
Vert.	9608.000	AV	34.5	38.6	8.6	34.2	-	47.5	53.9	6.4	Floor noise
Vert.	10000.000	AV	42.0	39.3	-2.5	34.3	-	44.6	53.9	9.3	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.6 m / 3.0 m) = 1.59 dB

10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

*1) Not Out of Band emission(Leakage Power)

20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	98.7	27.5	4.7	34.6	96.3	-	-	Carrier
Hori.	2400.000	PK	43.3	27.6	4.7	34.6	40.9	76.3	35.4	
Vert.	2402.000	PK	98.4	27.5	4.7	34.6	96.0	-	-	Carrier
Vert.	2400.000	PK	44.7	27.6	4.7	34.6	42.3	76.0	33.8	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

***These results have sufficient margin without taking account Duty cycle correction factor.**

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission (Reference Plot for band-edge)

Report No.	14011106H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	September 16, 2021
Temperature / Humidity	24 deg. C / 66 % RH
Engineer	Kiyoshiro Okazaki
	(1 GHz -10 GHz)
Mode	Tx, Hopping Off, 3DH5 2402 MHz

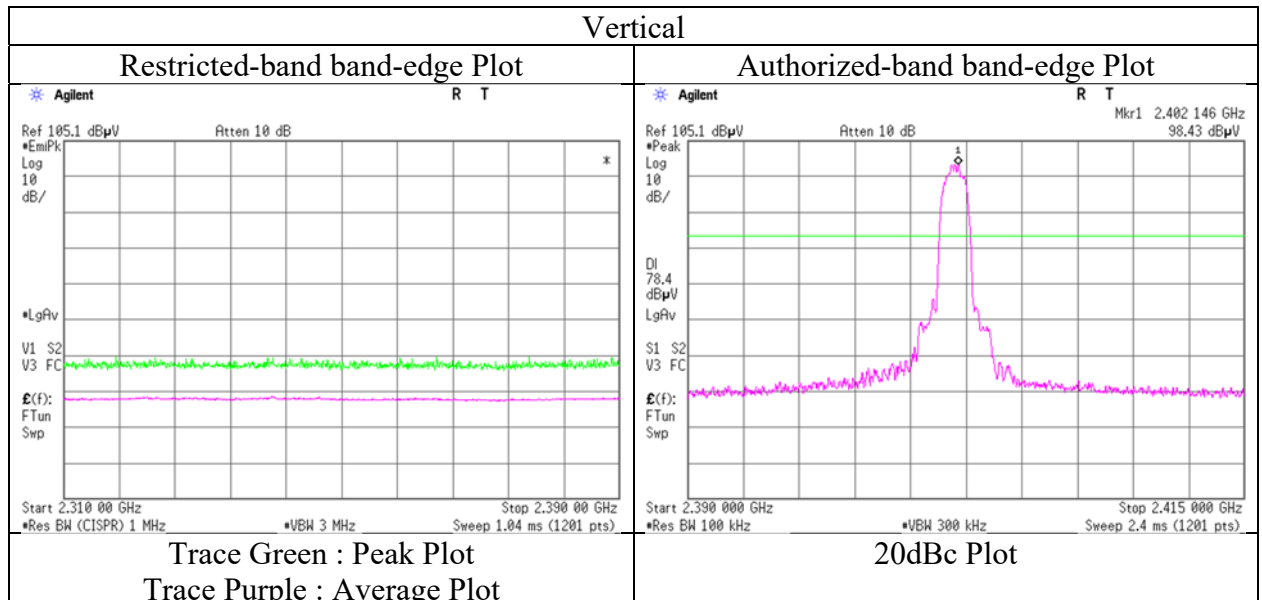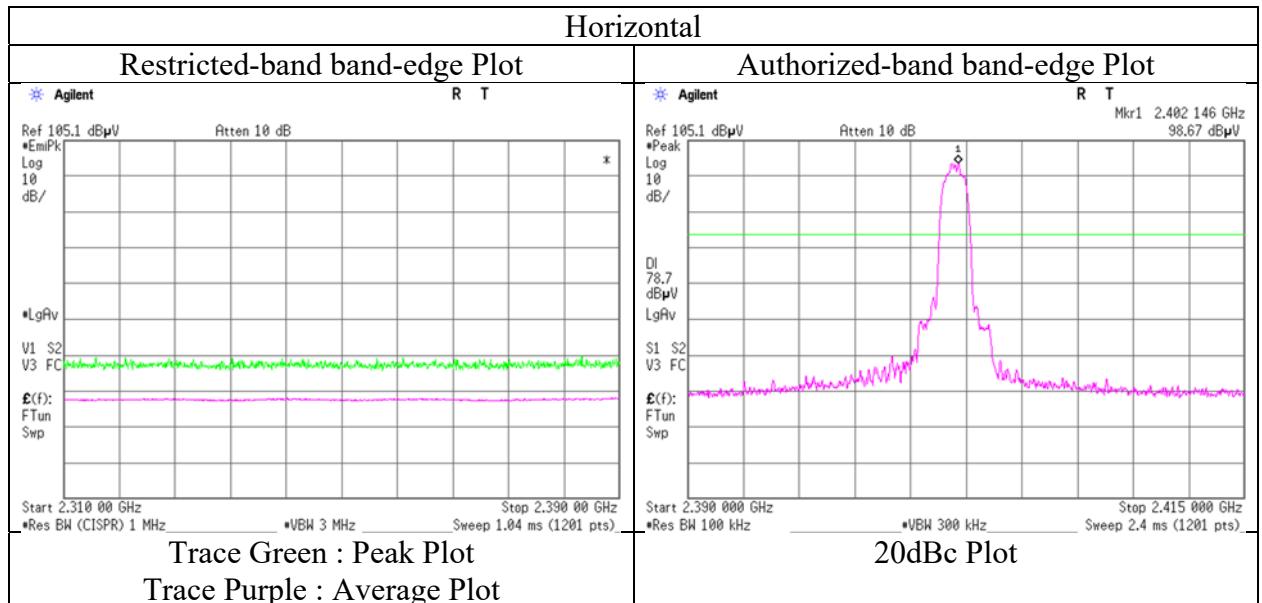

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No.	14011106H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.2	No.2	No.2
Date	September 16, 2021	September 17, 2021	September 18, 2021
Temperature / Humidity	24 deg. C / 66 % RH	22 deg. C / 51 % RH	20 deg. C / 60 % RH
Engineer	Kiyoshiro Okazaki	Junya Okuno	Junya Okuno
	(1 GHz - 10 GHz)	(10 GHz - 26.5 GHz)	(Below 1 GHz)
Mode	Tx, Hopping Off, 3DH5 2441 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	30.000	QP	22.1	19.1	6.7	28.5	-	19.4	40.0	20.6	
Hori.	33.398	QP	22.2	17.5	6.8	28.5	-	18.0	40.0	22.0	
Hori.	200.000	QP	21.9	16.6	8.2	27.9	-	18.9	43.5	24.6	
Hori.	232.840	QP	27.8	12.5	8.4	27.7	-	20.9	46.0	25.1	
Hori.	260.339	QP	24.1	12.8	8.6	27.7	-	17.8	46.0	28.2	
Hori.	913.961	QP	26.5	22.3	11.4	28.7	-	31.4	46.0	14.6	
Hori.	1579.948	PK	60.7	25.3	4.1	35.1	-	54.9	73.9	19.0	
Hori.	4882.000	PK	44.0	31.6	6.8	33.8	-	48.6	73.9	25.3	Floor noise
Hori.	5000.000	PK	50.5	31.6	6.8	33.8	-	55.0	73.9	18.9	
Hori.	7323.000	PK	42.8	36.2	8.1	33.6	-	53.5	73.9	20.4	Floor noise
Hori.	9764.000	PK	45.2	38.9	8.6	34.2	-	58.4	73.9	15.5	Floor noise
Hori.	10000.000	PK	49.2	39.3	-2.5	34.3	-	51.7	73.9	22.2	
Hori.	1579.948	AV	50.1	25.3	4.1	35.1	-	44.3	53.9	9.6	
Hori.	4882.000	AV	34.6	31.6	6.8	33.8	-	39.2	53.9	14.7	Floor noise
Hori.	5000.000	AV	45.7	31.6	6.8	33.8	-	50.2	53.9	3.7	
Hori.	7323.000	AV	34.2	36.2	8.1	33.6	-	44.9	53.9	9.0	Floor noise
Hori.	9764.000	AV	34.7	38.9	8.6	34.2	-	47.9	53.9	6.0	Floor noise
Hori.	10000.000	AV	45.0	39.3	-2.5	34.3	-	47.6	53.9	6.4	
Vert.	30.000	QP	22.2	19.1	6.7	28.5	-	19.5	40.0	20.5	
Vert.	33.398	QP	22.6	17.5	6.8	28.5	-	18.4	40.0	21.6	
Vert.	200.000	QP	21.9	16.6	8.2	27.9	-	18.9	43.5	24.6	
Vert.	232.840	QP	25.2	12.5	8.4	27.7	-	18.3	46.0	27.7	
Vert.	260.339	QP	23.1	12.8	8.6	27.7	-	16.8	46.0	29.2	
Vert.	913.961	QP	25.5	22.3	11.4	28.7	-	30.4	46.0	15.6	
Vert.	1579.948	PK	62.0	25.3	4.1	35.1	-	56.2	73.9	17.7	
Vert.	4882.000	PK	44.0	31.6	6.8	33.8	-	48.6	73.9	25.3	Floor noise
Vert.	5000.000	PK	48.6	31.6	6.8	33.8	-	53.1	73.9	20.8	
Vert.	7323.000	PK	42.8	36.2	8.1	33.6	-	53.5	73.9	20.4	Floor noise
Vert.	9764.000	PK	45.2	38.9	8.6	34.2	-	58.4	73.9	15.5	Floor noise
Vert.	10000.000	PK	47.2	39.3	-2.5	34.3	-	49.8	73.9	24.1	
Vert.	1579.948	AV	50.0	25.3	4.1	35.1	-	44.2	53.9	9.7	
Vert.	4882.000	AV	34.6	31.6	6.8	33.8	-	39.2	53.9	14.7	Floor noise
Vert.	5000.000	AV	46.1	31.6	6.8	33.8	-	50.6	53.9	3.3	
Vert.	7323.000	AV	34.2	36.2	8.1	33.6	-	44.9	53.9	9.0	Floor noise
Vert.	9764.000	AV	34.7	38.9	8.6	34.2	-	47.9	53.9	6.0	Floor noise
Vert.	10000.000	AV	42.2	39.3	-2.5	34.3	-	44.7	53.9	9.2	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.6 m / 3.0 m) = 1.59 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

***These results have sufficient margin without taking account Duty cycle correction factor.**

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No. 14011106H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.2 No.2 No.2
Date September 16, 2021 September 17, 2021 September 18, 2021
Temperature / Humidity 24 deg. C / 66 % RH 22 deg. C / 51 % RH 20 deg. C / 60 % RH
Engineer Kiyoshiro Okazaki Junya Okuno Junya Okuno
(1 GHz - 10 GHz) (10 GHz - 26.5 GHz) (Below 1 GHz)
Mode Tx, Hopping Off, 3DH5 2480 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	30.000	QP	22.2	19.1	6.7	28.5	-	19.5	40.0	20.5	
Hori.	33.398	QP	22.3	17.5	6.8	28.5	-	18.1	40.0	21.9	
Hori.	200.000	QP	21.9	16.6	8.2	27.9	-	18.9	43.5	24.6	
Hori.	232.840	QP	27.8	12.5	8.4	27.7	-	20.9	46.0	25.1	
Hori.	260.339	QP	23.8	12.8	8.6	27.7	-	17.5	46.0	28.5	
Hori.	913.961	QP	26.0	22.3	11.4	28.7	-	30.9	46.0	15.1	
Hori.	1579.948	PK	60.7	25.3	4.1	35.1	-	54.9	73.9	19.0	
Hori.	2483.500	PK	49.8	27.4	4.7	34.6	-	47.3	73.9	26.6	
Hori.	2500.000	PK	46.4	27.4	4.7	34.6	-	44.0	73.9	29.9	
Hori.	4960.000	PK	43.0	31.6	6.8	33.8	-	47.5	73.9	26.4	Floor noise
Hori.	5000.000	PK	50.5	31.6	6.8	33.8	-	55.0	73.9	18.9	
Hori.	7440.000	PK	43.0	36.0	8.1	33.7	-	53.5	73.9	20.4	Floor noise
Hori.	9920.000	PK	45.1	38.9	8.6	34.3	-	58.4	73.9	15.5	Floor noise
Hori.	10000.000	PK	49.5	39.3	-2.5	34.3	-	52.1	73.9	21.9	
Hori.	1579.948	AV	50.1	25.3	4.1	35.1	-	44.3	53.9	9.6	
Hori.	2483.500	AV	37.8	27.4	4.7	34.6	1.1	36.5	53.9	17.4	*1)
Hori.	2500.000	AV	38.5	27.4	4.7	34.6	-	36.1	53.9	17.8	
Hori.	4960.000	AV	34.4	31.6	6.8	33.8	-	38.9	53.9	15.0	Floor noise
Hori.	5000.000	AV	45.7	31.6	6.8	33.8	-	50.2	53.9	3.7	
Hori.	7440.000	AV	34.3	36.0	8.1	33.7	-	44.7	53.9	9.2	Floor noise
Hori.	9920.000	AV	34.6	38.9	8.6	34.3	-	47.9	53.9	6.0	Floor noise
Hori.	10000.000	AV	45.3	39.3	-2.5	34.3	-	47.8	53.9	6.1	
Vert.	30.000	QP	22.2	19.1	6.7	28.5	-	19.5	40.0	20.5	
Vert.	33.398	QP	22.6	17.5	6.8	28.5	-	18.4	40.0	21.6	
Vert.	200.000	QP	22.0	16.6	8.2	27.9	-	19.0	43.5	24.5	
Vert.	232.840	QP	25.1	12.5	8.4	27.7	-	18.2	46.0	27.8	
Vert.	260.339	QP	22.9	12.8	8.6	27.7	-	16.6	46.0	29.4	
Vert.	913.961	QP	25.4	22.3	11.4	28.7	-	30.3	46.0	15.7	
Vert.	1579.948	PK	62.0	25.3	4.1	35.1	-	56.2	73.9	17.7	
Vert.	2483.500	PK	48.6	27.4	4.7	34.6	-	46.1	73.9	27.8	
Vert.	2500.000	PK	47.0	27.4	4.7	34.6	-	44.6	73.9	29.3	
Vert.	4960.000	PK	43.0	31.6	6.8	33.8	-	47.5	73.9	26.4	Floor noise
Vert.	5000.000	PK	48.6	31.6	6.8	33.8	-	53.1	73.9	20.8	
Vert.	7440.000	PK	43.0	36.0	8.1	33.7	-	53.5	73.9	20.4	Floor noise
Vert.	9920.000	PK	45.1	38.9	8.6	34.3	-	58.4	73.9	15.5	Floor noise
Vert.	10000.000	PK	47.4	39.3	-2.5	34.3	-	49.9	73.9	24.0	
Vert.	1579.948	AV	50.0	25.3	4.1	35.1	-	44.2	53.9	9.7	
Vert.	2483.500	AV	37.5	27.4	4.7	34.6	1.1	36.1	53.9	17.8	*1)
Vert.	2500.000	AV	39.6	27.4	4.7	34.6	-	37.2	53.9	16.7	
Vert.	4960.000	AV	34.4	31.6	6.8	33.8	-	38.9	53.9	15.0	Floor noise
Vert.	5000.000	AV	46.1	31.6	6.8	33.8	-	50.6	53.9	3.3	
Vert.	7440.000	AV	34.3	36.0	8.1	33.7	-	44.7	53.9	9.2	Floor noise
Vert.	9920.000	AV	34.6	38.9	8.6	34.3	-	47.9	53.9	6.0	Floor noise
Vert.	10000.000	AV	42.2	39.3	-2.5	34.3	-	44.7	53.9	9.2	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.6\text{ m} / 3.0\text{ m}) = 1.59\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

*1) Not Out of Band emission(Leakage Power)

*These results have sufficient margin without taking account Duty cycle correction factor.

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission (Reference Plot for band-edge)

Report No.	14011106H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	September 16, 2021
Temperature / Humidity	24 deg. C / 66 % RH
Engineer	Kiyoshiro Okazaki (1 GHz -10 GHz)
Mode	Tx, Hopping Off, 3DH5 2480 MHz

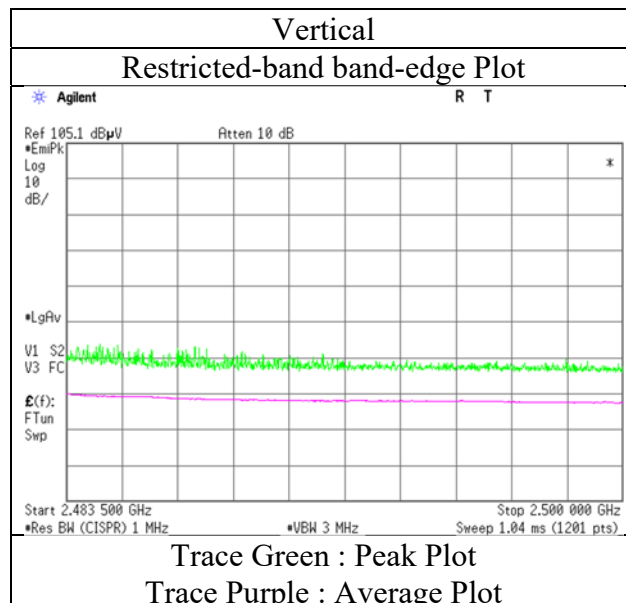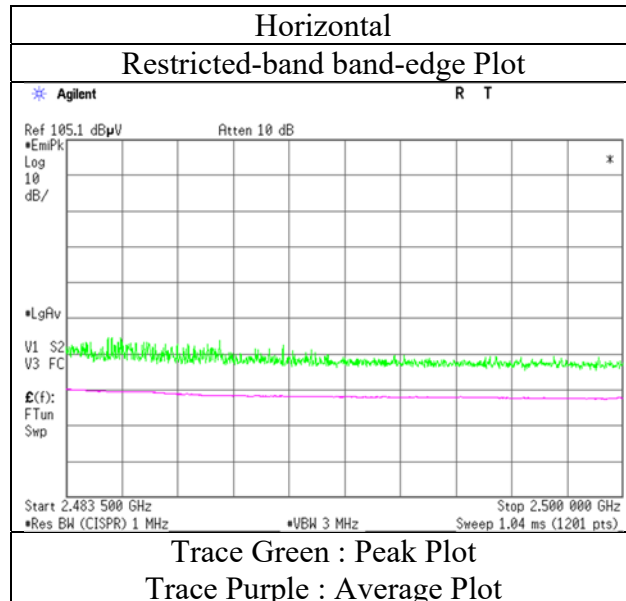

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No. 14011106H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.2
Date October 18, 2021
Temperature / Humidity 21 deg. C / 46 % RH
Engineer Junki Nagatomi
(1 GHz -10 GHz)
Mode Tx, Hopping Off, 3DH5 2402 MHz + 11a 5180 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	1579.948	PK	62.2	25.1	4.0	35.1	-	56.1	73.9	17.8	
Hori.	2390.000	PK	51.4	27.5	4.6	34.6	-	48.9	73.9	25.0	
Hori.	5000.000	PK	45.3	31.8	6.9	33.8	-	50.2	73.9	23.7	
Hori.	1579.948	AV	48.9	25.1	4.0	35.1	-	42.8	53.9	11.1	
Hori.	2390.000	AV	37.4	27.5	4.6	34.6	1.1	36.1	53.9	17.8	*1)
Hori.	5000.000	AV	38.7	31.8	6.9	33.8	-	43.6	53.9	10.3	
Vert.	1579.948	PK	62.9	25.1	4.0	35.1	-	56.9	73.9	17.0	
Vert.	2390.000	PK	49.5	27.5	4.6	34.6	-	47.1	73.9	26.8	
Vert.	5000.000	PK	47.5	31.8	6.9	33.8	-	52.4	73.9	21.5	
Vert.	1579.948	AV	50.2	25.1	4.0	35.1	-	44.1	53.9	9.8	
Vert.	2390.000	AV	36.3	27.5	4.6	34.6	1.1	34.9	53.9	19.0	*1)
Vert.	5000.000	AV	40.3	31.8	6.9	33.8	-	45.2	53.9	8.7	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.6\text{ m} / 3.0\text{ m}) = 1.59\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

*1) Not Out of Band emission(Leakage Power)

20dBc Data Sheet



Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	102.4	27.5	4.6	34.6	99.9	-	-	Carrier
Hori.	2400.000	PK	47.3	27.5	4.6	34.6	44.8	79.9	35.1	
Vert.	2402.000	PK	100.4	27.5	4.6	34.6	97.9	-	-	Carrier
Vert.	2400.000	PK	44.9	27.5	4.6	34.6	42.4	77.9	35.5	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

***These results have sufficient margin without taking account Duty cycle correction factor.**

Radiated Spurious Emission (Reference Plot for band-edge)

Report No.	14011106H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	October 18, 2021
Temperature / Humidity	21 deg. C / 46 % RH
Engineer	Junki Nagatomi
	(1 GHz -10 GHz)
Mode	Tx, Hopping Off, 3DH5 2402 MHz + 11a 5180 MHz

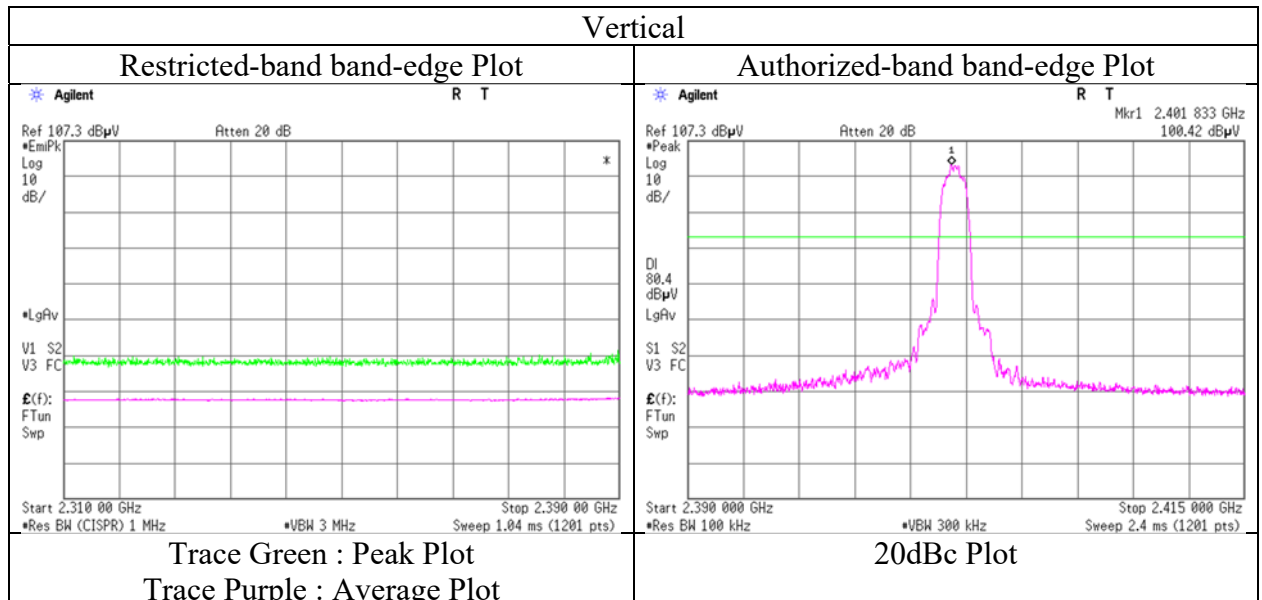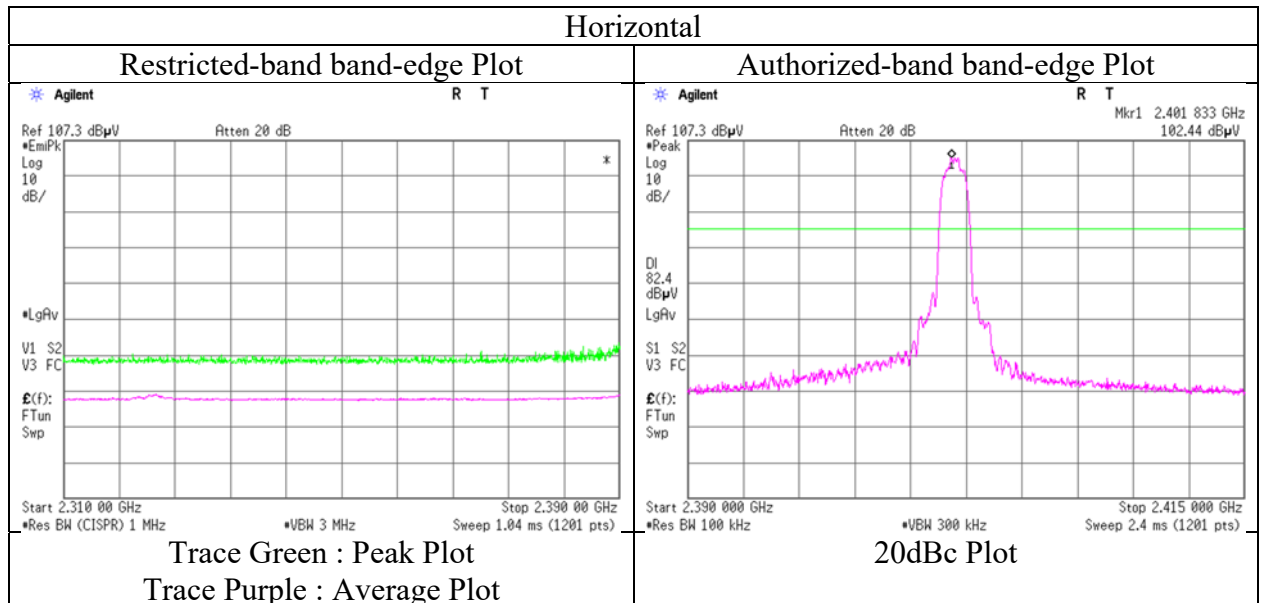

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No.	14011106H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.2	No.2	No.3
Date	October 18, 2021	October 18, 2021	October 19, 2021
Temperature / Humidity	21 deg. C / 46 % RH	22 deg. C / 53 % RH	23 deg. C / 55 % RH
Engineer	Junki Nagatomi	Hiroki Numata	Kiyoshiro Okazaki
	(1 GHz -10 GHz)	(10 GHz - 26.5 GHz)	(Below 1 GHz)
Mode	Tx, Hopping Off, 3DH5 2441 MHz + 11a 5180 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	31.700	QP	22.8	18.0	7.1	32.3	-	15.6	40.0	24.4	
Hori.	134.448	QP	24.2	14.2	8.5	32.2	-	14.7	43.5	28.8	
Hori.	197.942	QP	29.2	16.8	9.1	32.2	-	22.9	43.5	20.6	
Hori.	214.832	QP	32.9	11.7	9.3	32.2	-	21.7	43.5	21.8	
Hori.	238.030	QP	29.8	12.1	9.5	32.1	-	19.3	46.0	26.7	
Hori.	915.800	QP	21.8	22.3	13.7	30.9	-	26.8	46.0	19.2	
Hori.	1579.948	PK	62.3	25.1	4.0	35.1	-	56.3	73.9	17.6	
Hori.	4882.000	PK	45.8	31.4	6.9	33.8	-	50.3	73.9	23.6	
Hori.	5000.000	PK	45.6	31.8	6.9	33.8	-	50.5	73.9	23.4	
Hori.	7323.000	PK	43.7	36.2	8.3	33.6	-	54.6	73.9	19.3	Floor noise
Hori.	9764.000	PK	43.6	39.0	8.9	34.2	-	57.3	73.9	16.6	Floor noise
Hori.	10000.000	PK	47.3	39.2	-2.6	34.3	-	49.6	73.9	24.3	
Hori.	1579.948	AV	48.9	25.1	4.0	35.1	-	42.8	53.9	11.1	
Hori.	4882.000	AV	36.5	31.4	6.9	33.8	1.1	42.1	53.9	11.8	
Hori.	5000.000	AV	38.8	31.8	6.9	33.8	-	43.7	53.9	10.2	
Hori.	7323.000	AV	34.6	36.2	8.3	33.6	-	45.5	53.9	8.4	Floor noise
Hori.	9764.000	AV	34.2	39.0	8.9	34.2	-	47.8	53.9	6.1	Floor noise
Hori.	10000.000	AV	42.4	39.2	-2.6	34.3	-	44.7	53.9	9.2	
Vert.	31.700	QP	26.1	18.0	7.1	32.3	-	18.9	40.0	21.1	
Vert.	134.448	QP	22.5	14.2	8.5	32.2	-	13.0	43.5	30.5	
Vert.	197.942	QP	22.9	16.8	9.1	32.2	-	16.6	43.5	26.9	
Vert.	214.832	QP	32.1	11.7	9.3	32.2	-	20.9	43.5	22.6	
Vert.	238.030	QP	28.9	12.1	9.5	32.1	-	18.4	46.0	27.6	
Vert.	915.800	QP	21.9	22.3	13.7	30.9	-	26.9	46.0	19.1	
Vert.	1579.948	PK	63.0	25.1	4.0	35.1	-	56.9	73.9	17.0	
Vert.	4882.000	PK	44.6	31.4	6.9	33.8	-	49.2	73.9	24.7	
Vert.	5000.000	PK	48.1	31.8	6.9	33.8	-	53.0	73.9	20.9	
Vert.	7323.000	PK	43.6	36.2	8.3	33.6	-	54.5	73.9	19.4	Floor noise
Vert.	9764.000	PK	43.6	39.0	8.9	34.2	-	57.2	73.9	16.7	Floor noise
Vert.	10000.000	PK	45.5	39.2	-2.6	34.3	-	47.8	73.9	26.1	
Vert.	1579.948	AV	50.3	25.1	4.0	35.1	-	44.3	53.9	9.7	
Vert.	4882.000	AV	35.1	31.4	6.9	33.8	1.1	40.8	53.9	13.1	
Vert.	5000.000	AV	40.4	31.8	6.9	33.8	-	45.3	53.9	8.7	
Vert.	7323.000	AV	34.6	36.2	8.3	33.6	-	45.5	53.9	8.4	Floor noise
Vert.	9764.000	AV	34.2	39.0	8.9	34.2	-	47.8	53.9	6.1	Floor noise
Vert.	10000.000	AV	40.2	39.2	-2.6	34.3	-	42.5	53.9	11.4	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.6 m / 3.0 m) = 1.59 dB
 10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

***These results have sufficient margin without taking account Duty cycle correction factor.**

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No. 14011106H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.2
Date October 18, 2021
Temperature / Humidity 21 deg. C / 46 % RH
Engineer Junki Nagatomi
(1 GHz -10 GHz)
Mode Tx, Hopping Off, 3DH5 2480 MHz + 11a 5180 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	1579.948	PK	62.4	25.1	4.0	35.1	-	56.3	73.9	17.6	
Hori.	2483.500	PK	53.1	27.3	4.7	34.6	-	50.5	73.9	23.4	
Hori.	5000.000	PK	45.6	31.8	6.9	33.8	-	50.5	73.9	23.4	
Hori.	1579.948	AV	48.9	25.1	4.0	35.1	-	42.8	53.9	11.1	
Hori.	2483.500	AV	40.5	27.3	4.7	34.6	1.1	39.0	53.9	14.9	*1)
Hori.	5000.000	AV	38.7	31.8	6.9	33.8	-	43.6	53.9	10.3	
Vert.	1579.948	PK	62.9	25.1	4.0	35.1	-	56.8	73.9	17.1	
Vert.	2483.500	PK	48.9	27.3	4.7	34.6	-	46.3	73.9	27.6	
Vert.	5000.000	PK	48.0	31.8	6.9	33.8	-	52.9	73.9	21.0	
Vert.	1579.948	AV	50.2	25.1	4.0	35.1	-	44.1	53.9	9.8	
Vert.	2483.500	AV	37.2	27.3	4.7	34.6	1.1	35.7	53.9	18.2	*1)
Vert.	5000.000	AV	40.3	31.8	6.9	33.8	-	45.2	53.9	8.7	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



Distance factor: 1 GHz - 10 GHz $20\log(3.6\text{ m} / 3.0\text{ m}) = 1.59\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

*1) Not Out of Band emission(Leakage Power)

***These results have sufficient margin without taking account Duty cycle correction factor.**

Radiated Spurious Emission (Reference Plot for band-edge)

Report No.	14011106H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	October 18, 2021
Temperature / Humidity	21 deg. C / 46 % RH
Engineer	Junki Nagatomi
	(1 GHz -10 GHz)
Mode	Tx, Hopping Off, 3DH5 2480 MHz + 11a 5180 MHz

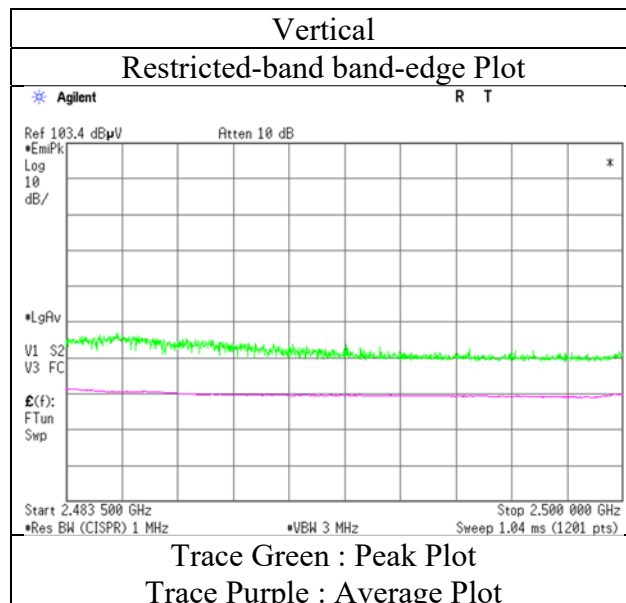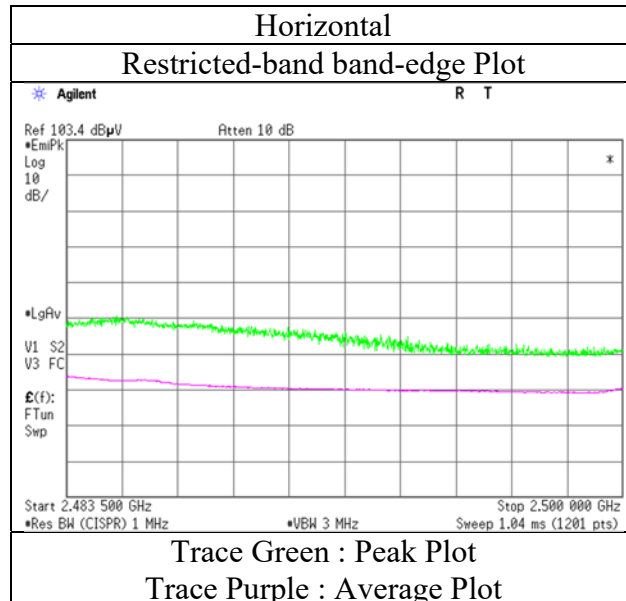

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission (Plot data, Worst case)

Report No.	14011106H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.2	No.2	No.2
Date	September 16, 2021	September 17, 2021	September 18, 2021
Temperature / Humidity	22 deg. C / 51 % RH	22 deg. C / 51 % RH	20 deg. C / 60 % RH
Engineer	Junya Okuno	Junya Okuno	Junya Okuno
	(1 GHz - 10 GHz)	(10 GHz - 26.5 GHz)	(Below 1 GHz)
Mode	Tx, Hopping Off, DH5 2402 MHz		

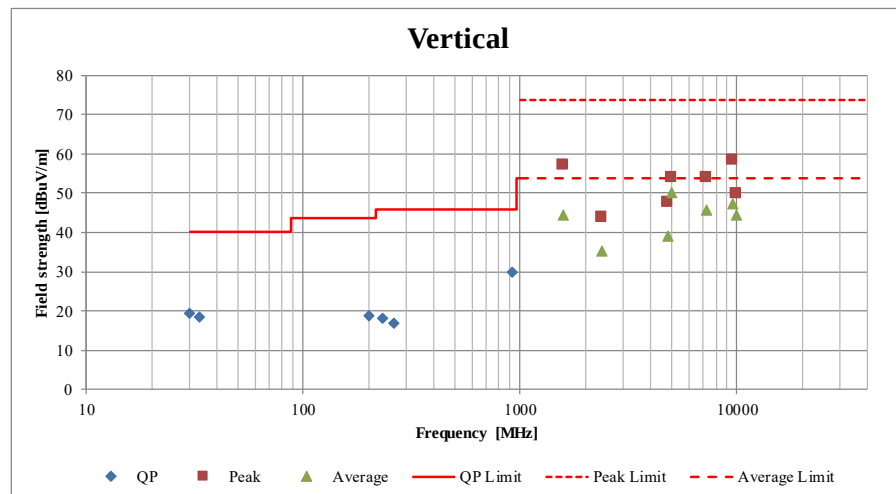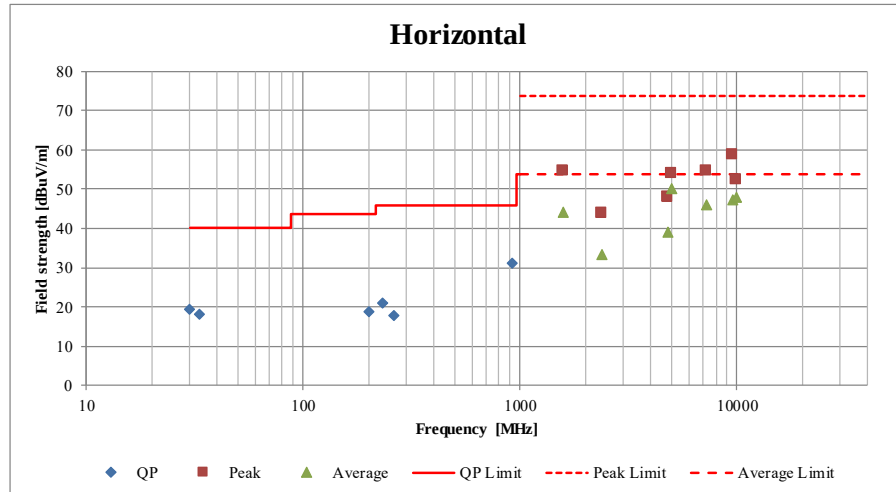

*These plots data contains sufficient number to show the trend of characteristic features for EUT.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN



Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Report No. 14011106H
Test place Ise EMC Lab. No.8 Measurement Room
Date September 21, 2021
Temperature / Humidity 22 deg. C / 68 % RH
Engineer Ken Fujita
Mode Tx, Hopping Off, DH5



2402 MHz

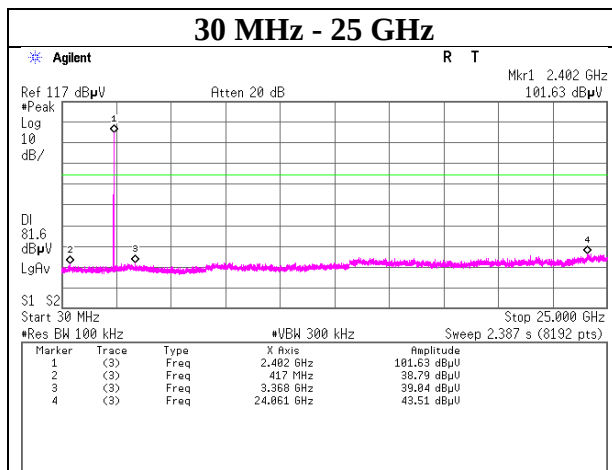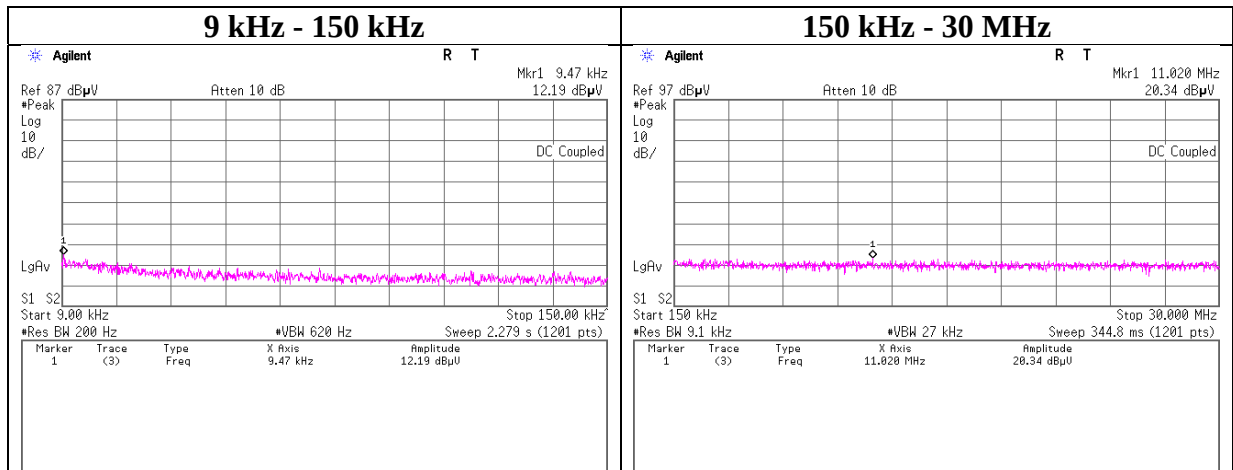

Conducted Spurious Emission

Report No. 14011106H
Test place Ise EMC Lab. No.8 Measurement Room
Date September 21, 2021
Temperature / Humidity 22 deg. C / 68 % RH
Engineer Ken Fujita
Mode Tx, Hopping Off, DH5

2441 MHz

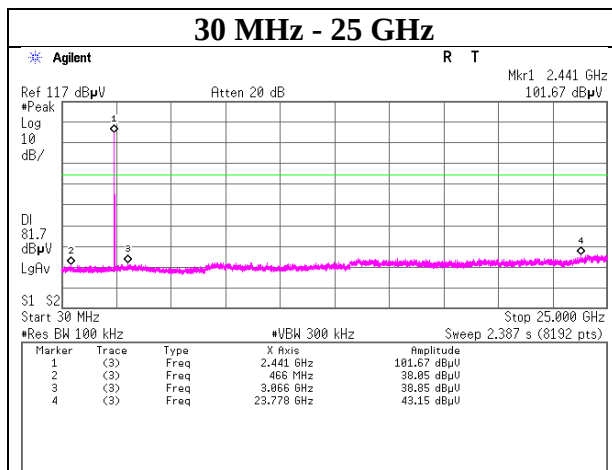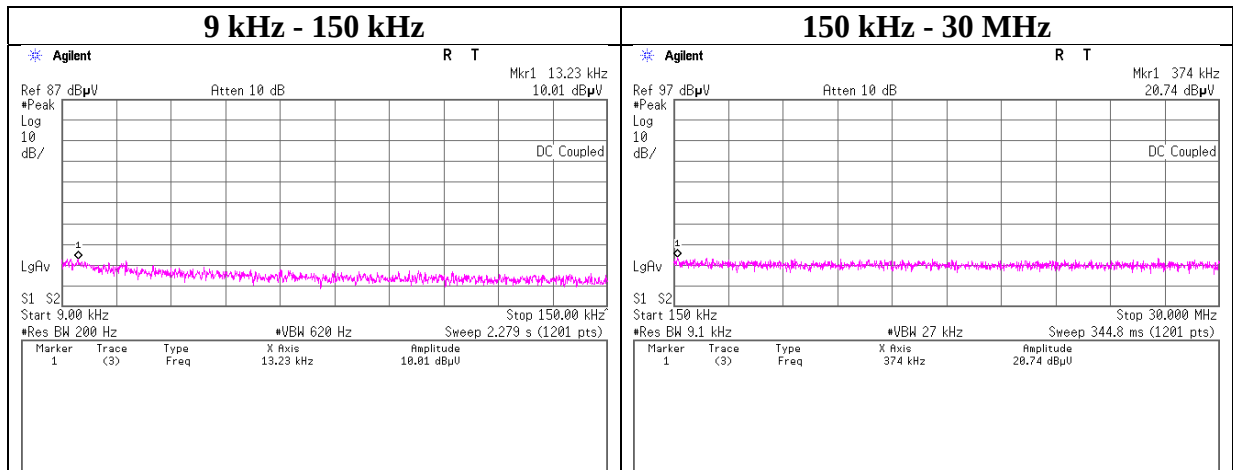

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN



Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Report No.	14011106H
Test place	Ise EMC Lab. No.8 Measurement Room
Date	September 21, 2021
Temperature / Humidity	22 deg. C / 68 % RH
Engineer	Ken Fujita
Mode	Tx, Hopping Off, DH5

2480 MHz

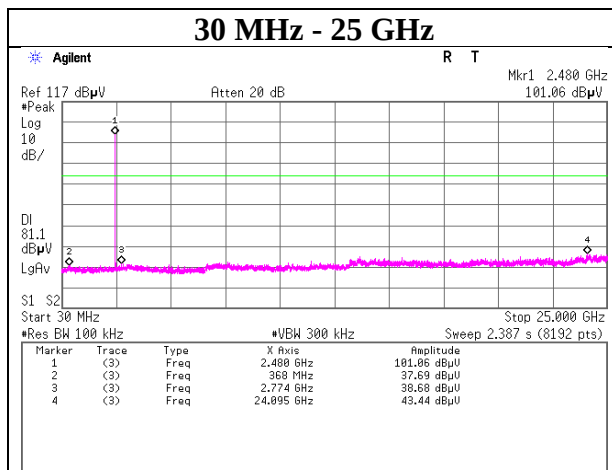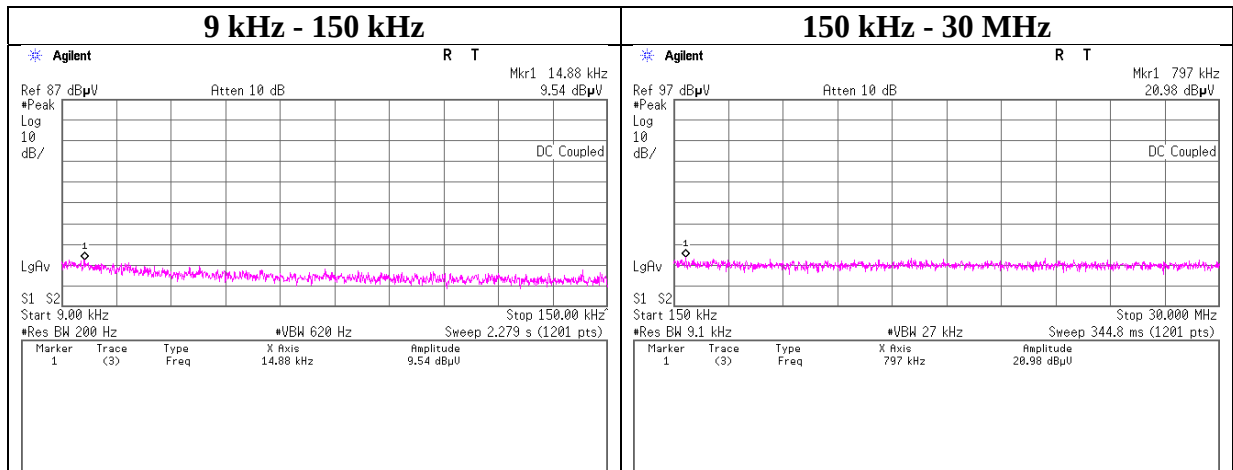

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN



Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Report No.	14011106H
Test place	Ise EMC Lab. No.8 Measurement Room
Date	September 21, 2021
Temperature / Humidity	22 deg. C / 68 % RH
Engineer	Ken Fujita
Mode	Tx, Hopping Off, 3DH5

2402 MHz

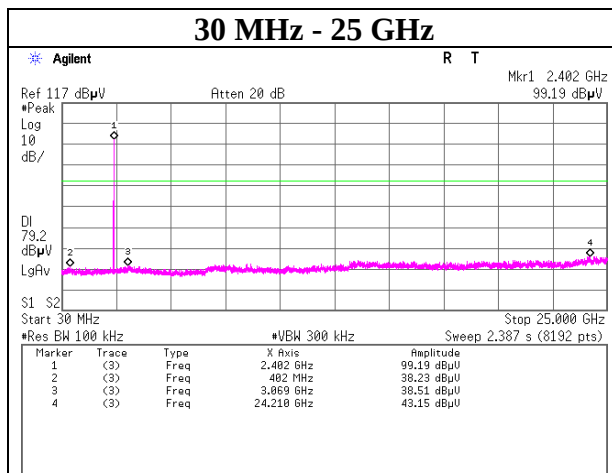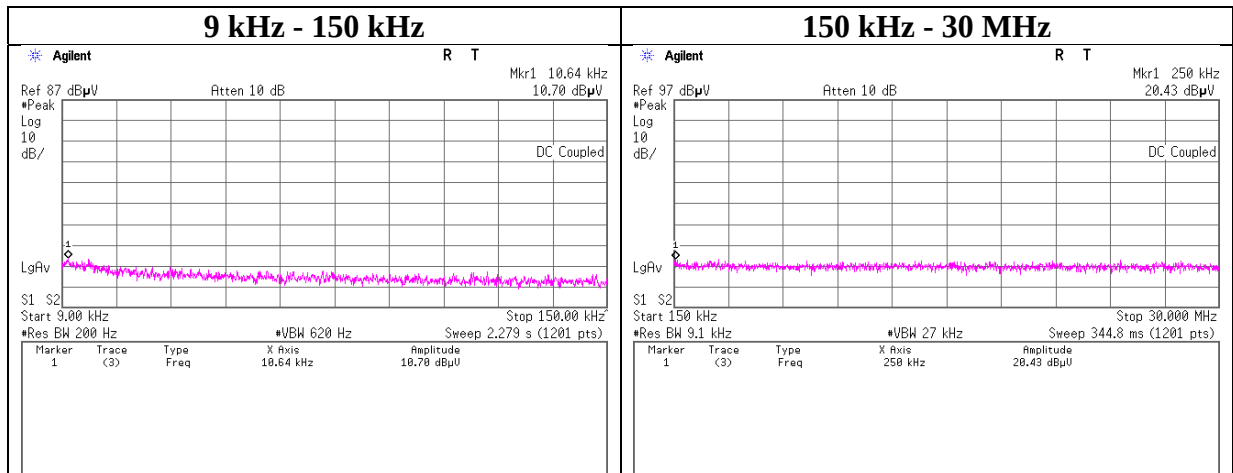

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN



Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Report No. 14011106H
Test place Ise EMC Lab. No.8 Measurement Room
Date September 21, 2021
Temperature / Humidity 22 deg. C / 68 % RH
Engineer Ken Fujita
Mode Tx, Hopping Off, 3DH5



2441 MHz

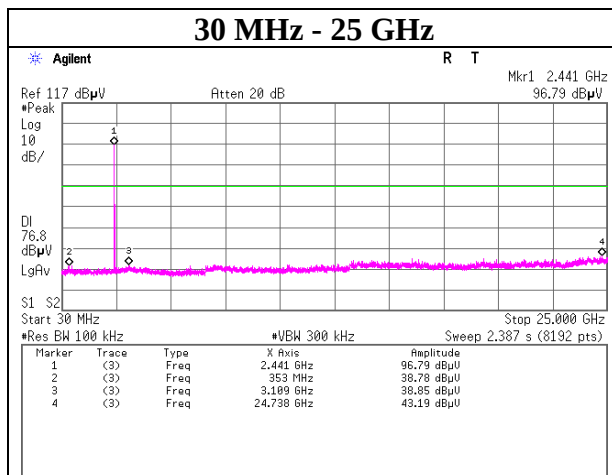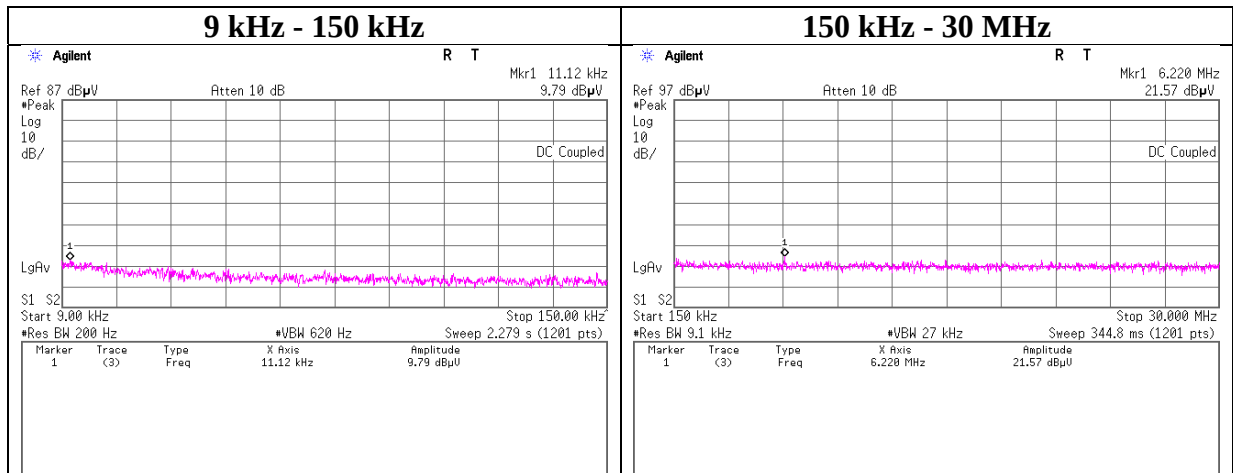

Conducted Spurious Emission

Report No. 14011106H
Test place Ise EMC Lab. No.8 Measurement Room
Date September 21, 2021
Temperature / Humidity 22 deg. C / 68 % RH
Engineer Ken Fujita
Mode Tx, Hopping Off, 3DH5


2480 MHz

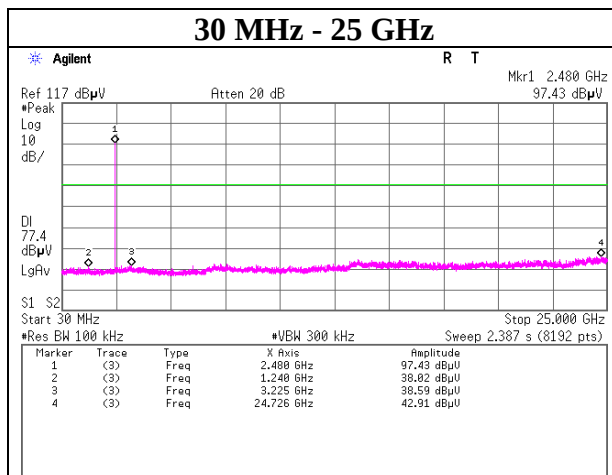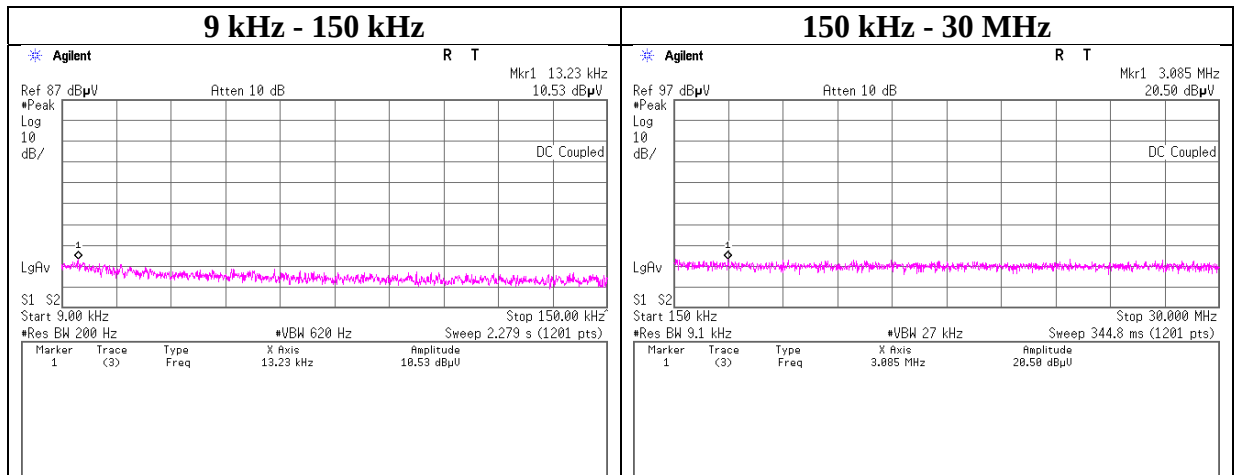


Conducted Emission Band Edge compliance

Report No. 14011106H
Test place Ise EMC Lab. No.8 Measurement Room
Date September 21, 2021
Temperature / Humidity 22 deg. C / 68 % RH
Engineer Ken Fujita
Mode Tx DH5

Hopping On

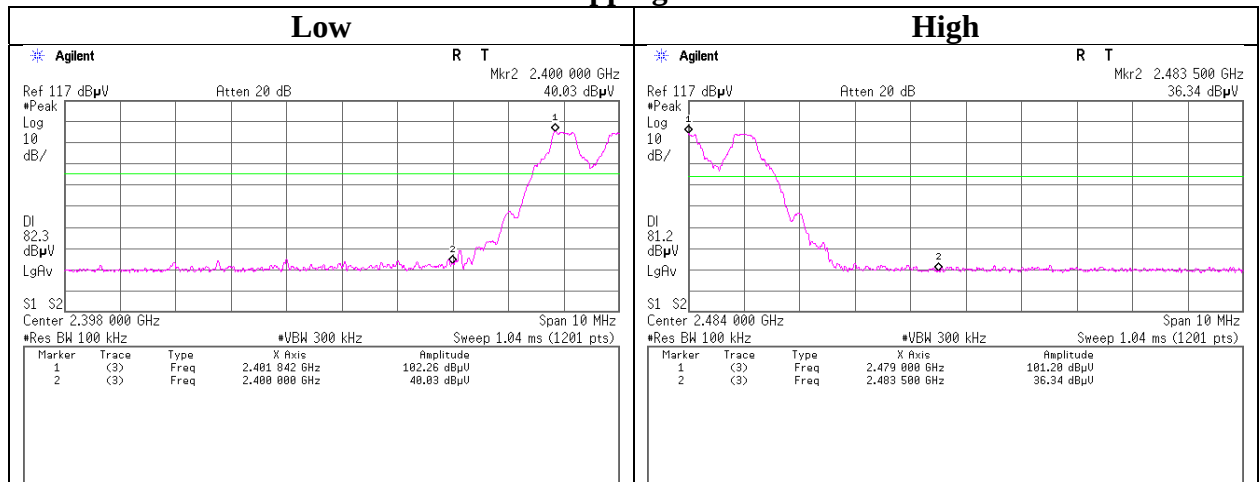


Hopping Off

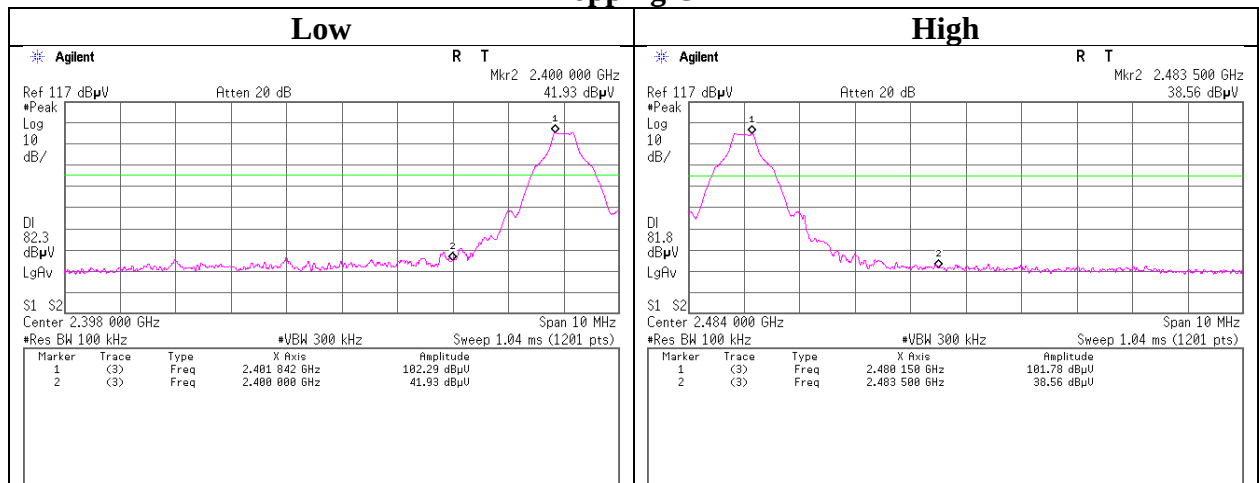


Conducted Emission Band Edge compliance

Report No. 14011106H
Test place Ise EMC Lab. No.8 Measurement Room
Date September 21, 2021
Temperature / Humidity 22 deg. C / 68 % RH
Engineer Ken Fujita
Mode Tx 3DH5

Hopping On

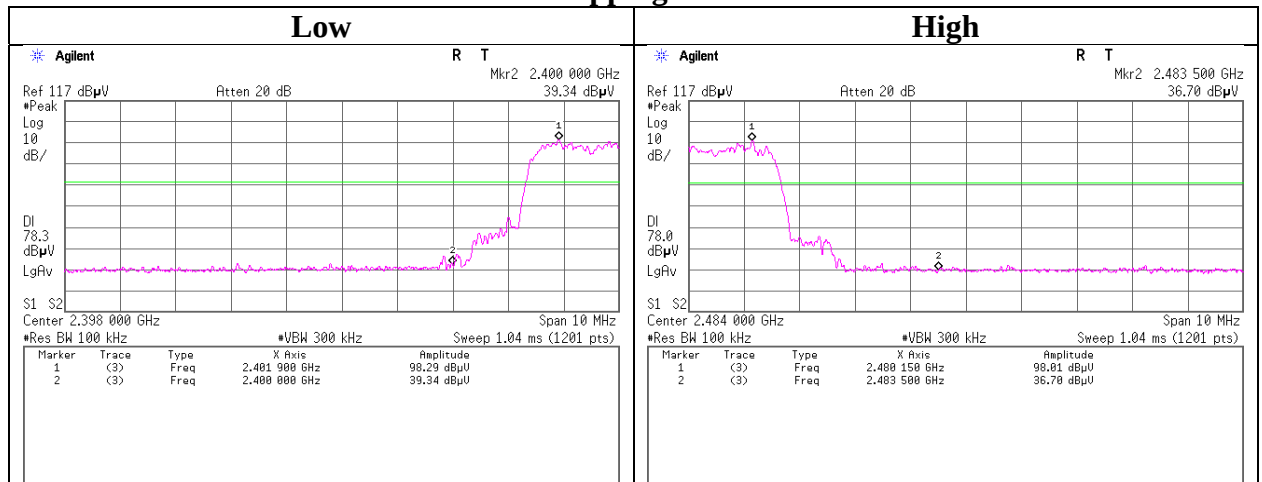

Hopping Off

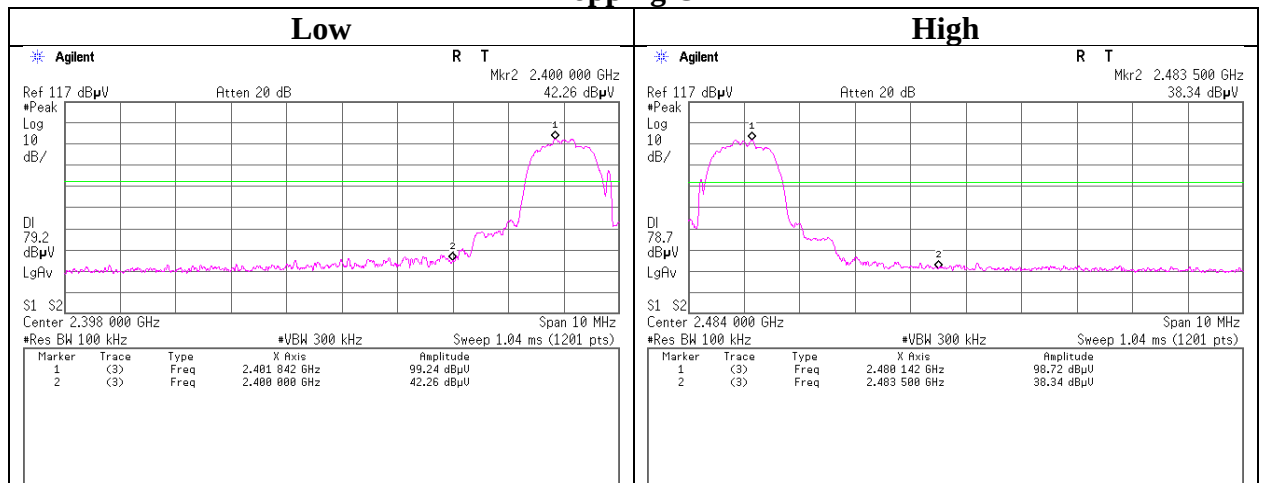

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

APPENDIX 2: Test instruments

Test equipment (Test on September 16 to 21, 2021)

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Isnt
AT	MOS-28	141567	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	0008	01/15/2021	12
AT	MMM-17	141557	DIGITAL HiTESTER	HIOKI E.E. CORPORATION	3805	70900530	01/07/2021	12
AT	MSA-15	141902	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY46187105	10/15/2020	12
AT	MPM-13	141810	Power Meter	Anritsu Corporation	ML2495A	824014	12/14/2020	12
AT	MPSE-18	141832	Power sensor	Anritsu Corporation	MA2411B	738174	12/14/2020	12
AT	MAT-58	141334	Attenuator(10dB)	Suhner	6810.19.A	-	12/07/2020	12
AT	MCC-138	141410	Microwave cable	Huber+Suhner	SUCOFLEX 102	37953/2	09/23/2020	12
AT	MCC-208	141287	Microwave Cable	RS Pro	R-132G7210200CD	-	02/03/2021	12
AT	MCC-38	141395	Coaxial Cable	UL Japan	-	-	11/17/2020	12
AT	MAT-26	141244	Attenuator(10dB)	Weinschel - API Technologies Corp	WA8-10-34	A198	02/24/2021	12
RE	MAEC-02	142004	AC2_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-06902	05/26/2020	24
RE	MOS-41	192300	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	0013	12/06/2020	12
RE	MMM-01	141542	Digital Tester	Fluke Corporation	FLUKE 26-3	78030611	08/10/2021	12
RE	MSA-04	141885	Spectrum Analyzer	Keysight Technologies Inc	E4448A	US44300523	11/09/2020	12
RE	MPA-10	141579	Pre Amplifier	Keysight Technologies Inc	8449B	3008A02142	02/18/2021	12
RE	MHF-25	141232	High Pass Filter 3.5-18.0GHz	UL Japan	HPF SELECTOR	001	09/23/2020	12
RE	MCC-218	141394	Microwave Cable	Junkosha	MWX221	1607S141(1 m) / 1608S264(5 m)	09/23/2020	12
RE	MHA-06	141512	Horn Antenna 1-18GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	254	09/14/2020	12
RE	MJM-27	142228	Measure	KOMELON	KMC-36	-	-	-
RE	COTS-ME MI-02	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
RE	MAEC-02-SVSWR	142006	AC2_Semi Anechoic Chamber(SVSWR)	TDK	Semi Anechoic Chamber 3m	DA-06902	04/09/2021	24
RE	MHA-02	141503	Horn Antenna 18-26.5GHz	EMCO	3160-09	1265	06/28/2021	12
RE	MAT-07	141203	Attenuator(6dB)	Weinschel Corp	2	BK7970	11/13/2020	12
RE	MBA-08	141427	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	VHA9103B+BBA9106	08031	07/10/2021	12
RE	MCC-12	141317	Coaxial Cable	UL Japan Inc.	-	-	09/25/2020	12
RE	MLA-21	141265	Logperiodic Antenna (200-1000MHz)	Schwarzbeck Mess-Elektronik OHG	VUSLP9111B	9111B-190	07/10/2021	12
RE	MPA-24	141594	Pre Amplifier	Keysight Technologies Inc	8447D	2944A10150	02/18/2021	12
RE	MTR-08	141949	Test Receiver	Rohde & Schwarz	ESCI	100767	08/05/2021	12

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Test equipment (Test on October 18 and 19, 2021)

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	MOS-41	192300	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	0013	12/06/2020	12
RE	MMM-01	141542	Digital Tester	Fluke Corporation	FLUKE 26-3	78030611	08/10/2021	12
RE	MPA-10	141579	Pre Amplifier	Keysight Technologies Inc	8449B	3008A02142	02/18/2021	12
RE	MHF-25	141232	High Pass Filter 3.5-18.0GHz	UL Japan	HPF SELECTOR	001	09/30/2021	12
RE	MCC-218	141394	Microwave Cable	Junkosha	MWX221	1607S141(1 m) / 1608S264(5 m)	09/30/2021	12
RE	MJM-27	142228	Measure	KOMELON	KMC-36	-	-	-
RE	COTS-ME MI-02	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
RE	MAEC-02-SVSWR	142006	AC2_Semi Anechoic Chamber(SVSWR)	TDK	Semi Anechoic Chamber 3m	DA-06902	04/09/2021	24
RE	MHA-20	141507	Horn Antenna 1-18GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	258	10/01/2020	12
RE	MRENT-130	141855	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY46187750	11/18/2020	12
RE	MAEC-03	142008	AC3_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	05/22/2020	24
RE	MOS-13	141554	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	1301	01/15/2021	12
RE	MMM-08	141532	DIGITAL HiTESTER	HIOKI E.E. CORPORATION	3805	51201197	01/07/2021	12
RE	MJM-16	142183	Measure	KOMELON	KMC-36	-	-	-
RE	MAT-95	142314	Attenuator	Pasternack Enterprises	PE7390-6	D/C 1504	06/09/2021	12
RE	MBA-03	141424	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	VHA9103+BBA9106	1915	08/21/2021	12
RE	MCC-51	141323	Coaxial cable	UL Japan	-	-	07/19/2021	12
RE	MLA-22	141266	Logperiodic Antenna (200-1000MHz)	Schwarzbeck Mess-Elektronik OHG	VUSLP9111B	9111B-191	08/21/2021	12
RE	MPA-13	141582	Pre Amplifier	SONOMA INSTRUMENT	310	260834	02/18/2021	12
RE	MTR-03	141942	Test Receiver	Rohde & Schwarz	ESCI	100300	08/05/2021	12

***Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.**

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item:

RE: Radiated Emission test

AT: Antenna Terminal Conducted test

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124