

RADIO TEST REPORT

Test Report No. 15028994H-C

Customer	DENSO TEN Limited
Description of EUT	Car Audio
Model Number of EUT	TN0023A
FCC ID	BABTN0023A
Test Regulation	FCC Part 15 Subpart E
Test Result	Complied
Issue Date	December 25, 2023
Remarks	Radiated Spurious Emission test only * For Permissive Change

Representative Test EngineerTomoya Sone
Engineer**Approved By**Ryota Yamanaka
Engineer

CERTIFICATE 5107.02

- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.
- ☒ There is no testing item of "Non-accreditation".

Report Cover Page - Form-ULID-003532 (DCS:13-EM-F0429) Issue# 22.0

ANNOUNCEMENT

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested. (Laboratory was not involved in sampling.)
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided from the customer for this report is identified in Section 1.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

REVISION HISTORY

Original Test Report No. 15028994H-C

Revision	Test Report No.	Date	Page Revised Contents
- (Original)	15028994H-C	December 25, 2023	-

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	ICES	Interference-Causing Equipment Standard
AC	Alternating Current	IEC	International Electrotechnical Commission
AFH	Adaptive Frequency Hopping	IEEE	Institute of Electrical and Electronics Engineers
AM	Amplitude Modulation	IF	Intermediate Frequency
Amp, AMP	Amplifier	ILAC	International Laboratory Accreditation Conference
ANSI	American National Standards Institute	ISED	Innovation, Science and Economic Development Canada
Ant, ANT	Antenna	ISO	International Organization for Standardization
AP	Access Point	JAB	Japan Accreditation Board
ASK	Amplitude Shift Keying	LAN	Local Area Network
Atten., ATT	Attenuator	LIMS	Laboratory Information Management System
AV	Average	MCS	Modulation and Coding Scheme
BPSK	Binary Phase-Shift Keying	MRA	Mutual Recognition Arrangement
BR	Bluetooth Basic Rate	N/A	Not Applicable
BT	Bluetooth	NIST	National Institute of Standards and Technology
BT LE	Bluetooth Low Energy	NS	No signal detect.
BW	BandWidth	NSA	Normalized Site Attenuation
Cal Int	Calibration Interval	NVLAP	National Voluntary Laboratory Accreditation Program
CCK	Complementary Code Keying	OBW	Occupied Band Width
Ch., CH	Channel	OFDM	Orthogonal Frequency Division Multiplexing
CISPR	Comite International Special des Perturbations Radioelectriques	P/M	Power meter
CW	Continuous Wave	PCB	Printed Circuit Board
DBPSK	Differential BPSK	PER	Packet Error Rate
DC	Direct Current	PHY	Physical Layer
D-factor	Distance factor	PK	Peak
DFS	Dynamic Frequency Selection	PN	Pseudo random Noise
DQPSK	Differential QPSK	PRBS	Pseudo-Random Bit Sequence
DSSS	Direct Sequence Spread Spectrum	PSD	Power Spectral Density
EDR	Enhanced Data Rate	QAM	Quadrature Amplitude Modulation
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	QP	Quasi-Peak
EMC	ElectroMagnetic Compatibility	QPSK	Quadri-Phase Shift Keying
EMI	ElectroMagnetic Interference	RBW	Resolution Band Width
EN	European Norm	RDS	Radio Data System
ERP, e.r.p.	Effective Radiated Power	RE	Radio Equipment
EU	European Union	RF	Radio Frequency
EUT	Equipment Under Test	RMS	Root Mean Square
Fac.	Factor	RSS	Radio Standards Specifications
FCC	Federal Communications Commission	Rx	Receiving
FHSS	Frequency Hopping Spread Spectrum	SA, S/A	Spectrum Analyzer
FM	Frequency Modulation	SG	Signal Generator
Freq.	Frequency	SVSWR	Site-Voltage Standing Wave Ratio
FSK	Frequency Shift Keying	TR	Test Receiver
GFSK	Gaussian Frequency-Shift Keying	Tx	Transmitting
GNSS	Global Navigation Satellite System	VBW	Video BandWidth
GPS	Global Positioning System	Vert.	Vertical
Hori.	Horizontal	WLAN	Wireless LAN

CONTENTS	PAGE
SECTION 1: Customer Information	5
SECTION 2: Equipment Under Test (EUT).....	5
SECTION 3: Test specification, Procedures & Results	7
SECTION 4: Operation of EUT during testing	10
SECTION 5: Radiated Spurious Emission and Band Edge Compliance	13
APPENDIX 1: Test Data	16
Burst rate confirmation	16
Radiated Spurious Emission.....	17
APPENDIX 2: Test Instruments	52
APPENDIX 3: Photographs of Test Setup	53
Radiated Spurious Emission.....	53

SECTION 1: Customer Information

Company Name	DENSO TEN Limited
Address	2-28, Goshō-dori 1-Chome, Hyogo-ku, Kobe, 652-8510 Japan
Telephone Number	+81-78-682-2159
Contact Person	Kaoru Abe

The information provided from the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer Information
- SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
- SECTION 4: Operation of EUT during testing

* The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

SECTION 2: Equipment Under Test (EUT)

2.1 Identification of EUT

Description	Car Audio
Model Number	TN0023A
Serial Number	Refer to SECTION 4.2
Condition	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	No Modification by the test lab
Receipt Date	November 10, 2023
Test Date	November 13 to 29, 2023

2.2 Product Description

General Specification

Rating	DC 12 V
Operating temperature	-30 deg. C to 65 deg. C

Radio Specification

WLAN (IEEE802.11b/11g/11n-20)

Equipment Type	Transceiver
Frequency of Operation	2412 MHz to 2462 MHz
Type of Modulation	DSSS, OFDM
Antenna Gain	0.28 dBi (Peak)

Bluetooth (BR / EDR / Low Energy)

Equipment Type	Transceiver
Frequency of Operation	2402 MHz to 2480 MHz
Type of Modulation	BT: FHSS (GFSK, $\pi/4$ DQPSK, 8 DPSK) BT LE: GFSK
Antenna Gain	0.08 dBi (Peak)

WLAN (IEEE802.11a/11n-20/11ac-20/11n-40/11ac-40/11ac-80)

Equipment Type	Transceiver	
Frequency of Operation	20 MHz Band	5180 MHz to 5240 MHz 5745 MHz to 5825 MHz
	40 MHz Band	5190 MHz to 5230 MHz 5755 MHz to 5795 MHz
	80 MHz Band	5210 MHz 5775 MHz
Type of Modulation	OFDM	
Antenna Gain	3.67 dBi (Peak) (ANT 1) / 3.37 dBi (Peak) (ANT 2)	

[AM, HD_AM / FM, RBDS/HD_FM / SDARS]

Equipment Type	Receiver
Frequency of Operation	AM, HD_AM: 530 kHz to 1710 kHz FM, RBDS/HD_FM: 87.75 MHz to 107.9 MHz SDARS: 2320 MHz to 2345 MHz

SECTION 3: Test specification, Procedures & Results

3.1 Test Specification

Test Specification	FCC Part 15 Subpart E The latest version on the first day of the testing period
Title	FCC 47 CFR Part 15 Radio Frequency Device Subpart E Unlicensed National Information Infrastructure Devices Section 15.407 General technical requirements

3.2 Procedures and Results

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
Spurious Emission Restricted Band Edge	FCC: ANSI C63.10-2013 KDB Publication Number 789033	FCC: 15.407 (b), 15.205 and 15.209	6.3 dB 5150.0 MHz, AV, Vert.	Complied	Radiated (> 30 MHz) *1)
	ISED: -	ISED: RSS-247 6.2.1.2 6.2.2.2 6.2.3.2 6.2.4.2			

Note: UL Japan, Inc.'s EMI Work Procedures: Work Instructions-ULID-003591 and Work Instructions-ULID-003593.

* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

*1) Radiated test was selected over 30 MHz based on FCC 15.407 (b) and KDB 789033 D02 G.3.b).

FCC Part 15.31 (e)

This EUT provides the stable voltage constantly to RF Module regardless of input voltage.
Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT.
Therefore, the equipment complies with the antenna requirement of Section 15.203.

3.3 Addition to Standard

No addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

Measurement uncertainty is not taken into account when stating conformity with a specified requirement.
Note: When margins obtained from test results are less than the measurement uncertainty, the test results may exceed the limit.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k = 2$.

Radiated emission

Measurement distance	Frequency range		Unit	Calculated Uncertainty (+/-)
3 m	9 kHz to 30 MHz		dB	3.3
10 m			dB	3.1
3 m	30 MHz to 200 MHz	Horizontal	dB	4.8
		Vertical	dB	5.0
	200 MHz to 1000 MHz	Horizontal	dB	5.1
		Vertical	dB	6.2
10 m	30 MHz to 200 MHz	Horizontal	dB	4.8
		Vertical	dB	4.8
	200 MHz to 1000 MHz	Horizontal	dB	4.9
		Vertical	dB	5.0
3 m	1 GHz to 6 GHz	Test Receiver	dB	5.1
		Spectrum Analyzer	dB	4.9
	6 GHz to 18 GHz	Test Receiver	dB	5.4
		Spectrum Analyzer	dB	5.2
1 m	10 GHz to 18 GHz	Spectrum analyzer	dB	5.0
	18 GHz to 26.5 GHz	Spectrum analyzer	dB	5.6
	26.5 GHz to 40 GHz	Spectrum analyzer	dB	4.9
0.5 m	26.5 GHz to 40 GHz	Spectrum analyzer	dB	4.9
10 m	1 GHz to 18 GHz	Test Receiver	dB	5.4

3.5 Test Location

UL Japan, Inc. Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 Japan

Telephone: +81-596-24-8999

A2LA Certificate Number: 5107.02 / FCC Test Firm Registration Number: 884919

ISED Lab Company Number: 2973C / CAB identifier: JP0002

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.5 measurement room	6.4 x 6.4 x 3.0	6.4 x 6.4	-	-
No.6 shielded room	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.10 shielded room	3.8 x 2.8 x 2.8	3.8 x 2.8	-	-
No.11 measurement room	4.0 x 3.4 x 2.5	N/A	-	-
No.12 measurement room	2.6 x 3.4 x 2.5	N/A	-	-
Large Chamber	16.9 x 22.1 x 10.17	16.9 x 22.1	-	10 m
Small Chamber	5.3 x 6.69 x 3.59	5.3 x 6.69	-	-

3.6 Test Data, Test Instruments, and Test Set Up

Refer to APPENDIX.

SECTION 4: Operation of EUT during testing

4.1 Operating Mode(s)

Mode	Remarks*
IEEE 802.11a (11a)	54 Mbps, PN9
IEEE 802.11ac SISO 20 MHz BW (11ac-20)	MCS 7 (Short GI), PN9
IEEE 802.11ac SISO 40 MHz BW (11ac-40)	MCS 7 (Short GI), PN9
IEEE 802.11ac SISO 80 MHz BW (11ac-80)	MCS 7 (Short GI), PN9
*The worst antenna and condition was determined based on the test result of Maximum Conducted Output Power.	
*Power of the EUT was set by the software as follows; Power 11a: 7.5 dBm Setting: 11ac-20: 6.5 dBm (5.5 dBm for MCS 8) 11ac-40: 5.5 dBm (3.5 dBm for MCS 8 and MCS 9) 11ac-80: 4.5 dBm (2.5 dBm for MCS 8 and MCS 9) Software: QCA RCT Ver 3.0.144.0 (Date: October 9, 2017, Storage location: Driven by connected PC)	
*This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.	
Test operating mode was determined as follows according to "Section 1 of 6 802.11 a/b/g/n testing - Managing Complex Regulatory Approvals - " of TCB Council Workshop October 2009.	


*The Details of Operation Mode(s)

Test Item	Operating Mode	Tested Antenna *2)	Tested Frequency			
			Lower Band	Middle Band	Additional Band	Upper Band
Radiated Spurious Emission (Below 1 GHz)	11a Tx *1)	1	5180 MHz	-	-	-
Radiated Spurious Emission (Above 1 GHz)	11a Tx	1	5180 MHz	-	-	5745 MHz
	11ac-20 Tx *3)		5220 MHz	-	-	5785 MHz
			5240 MHz	-	-	5825 MHz
	11ac-40 Tx *3)	1	5190 MHz	-	-	5755 MHz
			5230 MHz	-	-	5795 MHz
	11ac-80 Tx	1	5210 MHz	-	-	5775 MHz
*1) The mode was tested as a representative, because it had the highest power at antenna terminal test.						
*2) The worst antenna (Ant: x) and condition was determined as follows: Radiated Spurious Emission: Used Ant:1 based on the result of Maximum Conducted Output Power (e.i.r.p).						
*3) Since 11n-20 and 11ac-20, 11n-40 and 11ac-40, have the same modulation method and no differences in transmitting specification, test was performed on the representative mode that had the highest output power.						

Simultaneous transmission

Test Item	Mode *1)	Tested Antenna
Radiated Spurious Emission	Tx 11a 5240 MHz + Tx BT DH5 Hopping On	11a (Antenna 2) + Bluetooth (Antenna 2)
*1) The test was performed on the mode as a representative, because it had the highest power (Bluetooth DH5) of Bluetooth at antenna terminal test.		

4.2 Configuration and Peripherals

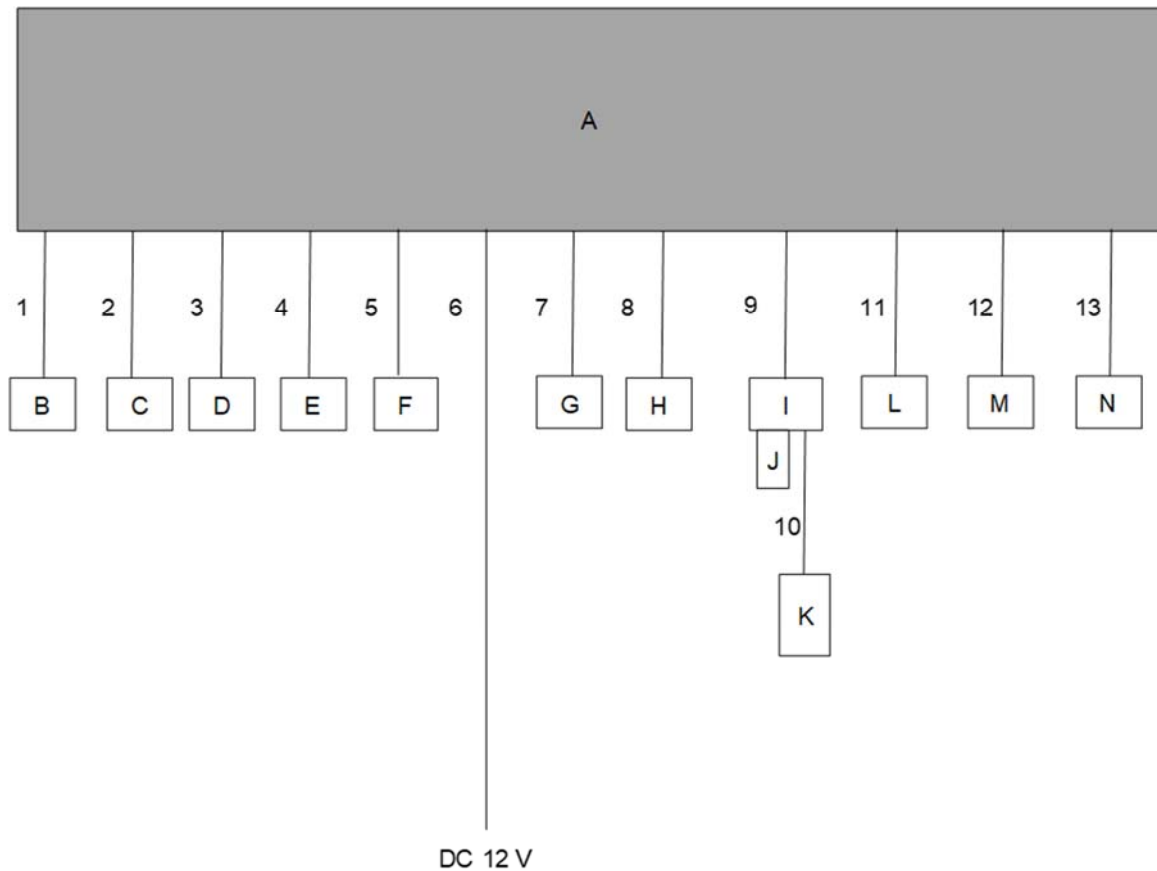

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support Equipment

No.	Item	Model number	Serial Number	Manufacturer	Remarks
A	Car Audio	TN0023A	100262165-0006	DENSO TEN Limited	EUT
B	Switch	-	-	-	-
C	DCM	19MC_DCM	E-033720026/015	DENSO TEN Limited	-
D	Steering Switch	84250-33500	033722021/015	TOYOTA	-
E	Low noise Amplifier	ZX60-242GLN-S+	S 2036302044	Mini-Circuits	-
F	GPS Antenna	29020043	033722058/002	DENSO TEN Limited	-
G	FM/AM Antenna	86300-30C30	PS600103	DENSO TEN Limited	-
H	Back Camera	86790-33260	033721012/001	Panasonic	-
I	USB/AUX socket	86190-12040	No.39	Kojima Industries Corporation	-
J	USB Memory	RUF3-K16GB	P10416	Buffalo Inc.	-
K	iPod touch	A1367	CCQ50WDDCPC	Apple	-
L	Mic	86730-11010	E-033720014/016	Panasonic	-
M	Mic	86730-11010	No.11	Panasonic	-
N	Speaker Dummy	-	-	-	-

List of Cables Used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	Signal Cable	2.4	Unshielded	Unshielded	-
2	Signal Cable	2.6	Unshielded	Unshielded	-
3	Signal Cable	2.4	Unshielded	Unshielded	-
4	Signal Cable	1.0	Unshielded	Unshielded	-
5	GNSS Antenna Cable	8.0	Shielded	Shielded	-
6	DC Cable	5.4	Unshielded	Unshielded	-
7	Antenna Cable	2.5	Shielded	Shielded	-
8	Signal Cable	6.8	Unshielded	Unshielded	-
9	USB Cable	2.5	Shielded	Shielded	-
10	Audio Cable	1.5	Shielded	Shielded	-
11	MIC Cable	2.4	Unshielded	Unshielded	-
12	MIC Cable	2.4	Unshielded	Unshielded	-
13	Speaker Cable	3.2	Unshielded	Unshielded	-

SECTION 5: Radiated Spurious Emission and Band Edge Compliance

Test Procedure

< Below 1 GHz >

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

< Above 1 GHz >

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane. Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

< Below 1 GHz >

The result also satisfied with the general limits specified in section 15.209 (a).

< Above 1 GHz >

Inside of restricted bands (Section 15.205):

Apply to limit in the Section 15.209 (a).

Outside of the restricted bands:

Apply to limit 68.2 dBuV/m, 3 m (-27 dBm e.i.r.p.*) in the Section 15.407 (b) (1) (2) (3).

For W58 Bandedge

-27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge in the section 15.407(b)(4)(i).

Restricted band edge:

Apply to limit in the Section 15.209 (a).

Since this limit is severer than the limit of the inside of restricted bands.

*Electric field strength to e.i.r.p. conversion:

$$E = \frac{1000000\sqrt{30P}}{3} \text{ (uV/m)} \quad : P \text{ is the e.i.r.p. (Watts)}$$


Test Antennas are used as below;

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

Frequency	Below 1 GHz	Above 1 GHz	
Instrument Used	Test Receiver	Spectrum Analyzer	
Detector	QP	Peak	Average
IF Bandwidth	BW: 120 kHz	RBW: 1 MHz VBW: 3 MHz	Method AD RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (RMS) Trace: ≥ 100 traces If duty cycle was less than 98%, a duty factor was added to the results.


Figure 1: Test Setup

Below 1 GHz

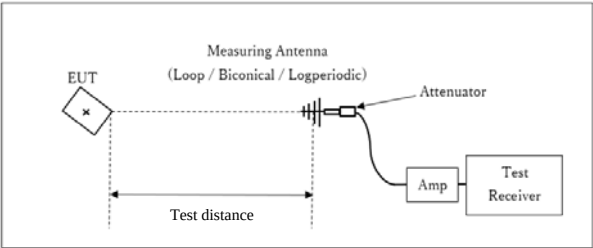

Test Distance: 3 m


1 GHz to 10 GHz

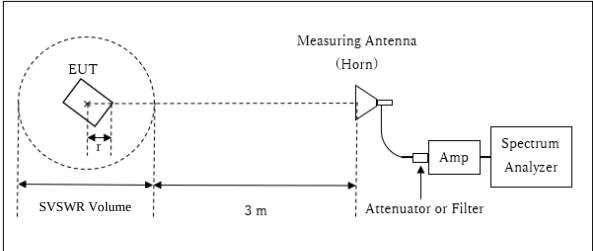

Distance Factor: $20 \times \log (3.6 \text{ m} / 3.0 \text{ m}) = 1.59 \text{ dB}$
* Test Distance: $(3 + \text{SVSWR Volume} / 2) - r = 3.6 \text{ m}$

SVSWR Volume : 1.5 m
(SVSWR Volume has been calibrated based on CISPR 16-1-4.)
 $r = 0.15 \text{ m}$

10 GHz to 40 GHz

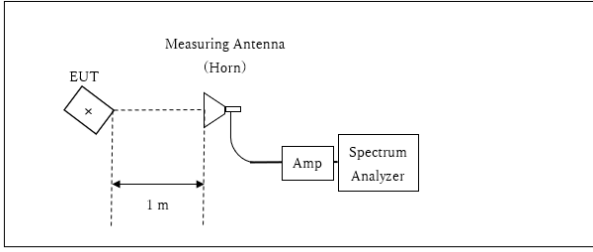

Distance Factor: $20 \times \log (1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$
*Test Distance: 1 m

The test was made on EUT at the normal use position.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement Range : 30 MHz to 40 GHz
Test Data : APPENDIX
Test Result : Pass

APPENDIX 1: Test Data


Burst rate confirmation

Test place
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab. No.2 Semi Anechoic Chamber
November 13, 2023
22 deg. C / 39 % RH
Tomoya Sone
Tx


11a 54 Mbps

Tx on / (Tx on + Tx off) = 0.600
Tx on / (Tx on + Tx off) * 100 = 60.0 %
Duty factor = $10 * \log(413.3 / 247.9) = 2.22 \text{ dB}$

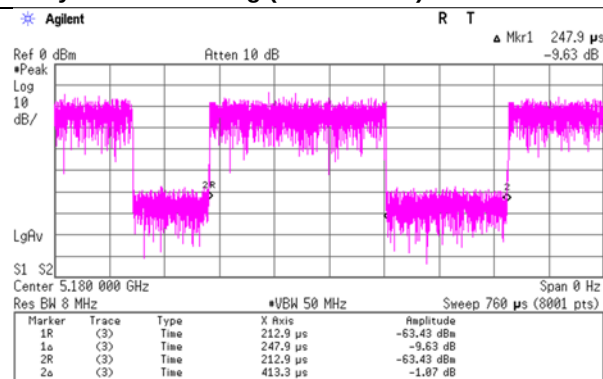


11ac-20 MCS 7

Tx on / (Tx on + Tx off) = 0.549
Tx on / (Tx on + Tx off) * 100 = 54.9 %
Duty factor = $10 * \log(387.4 / 212.6) = 2.61 \text{ dB}$

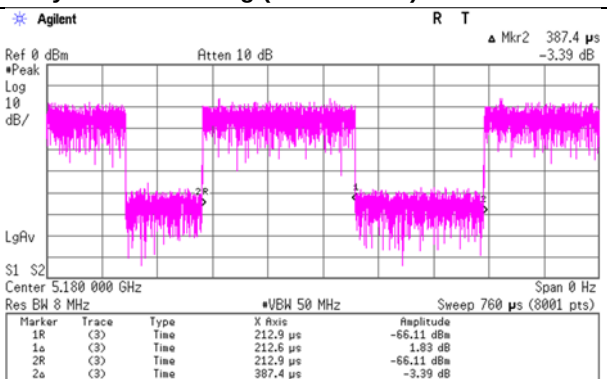


11ac-40 MCS 7

Tx on / (Tx on + Tx off) = 0.431
Tx on / (Tx on + Tx off) * 100 = 43.1 %
Duty factor = $10 * \log(291.4 / 125.7) = 3.65 \text{ dB}$

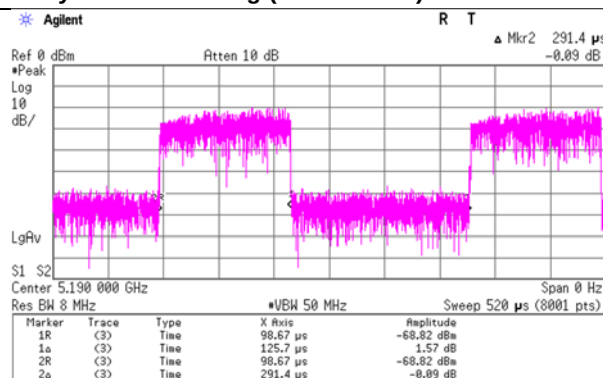

11ac-80 MCS 7

Tx on / (Tx on + Tx off) = 0.319
Tx on / (Tx on + Tx off) * 100 = 31.9 %
Duty factor = $10 * \log(257.7 / 82.16) = 4.96 \text{ dB}$

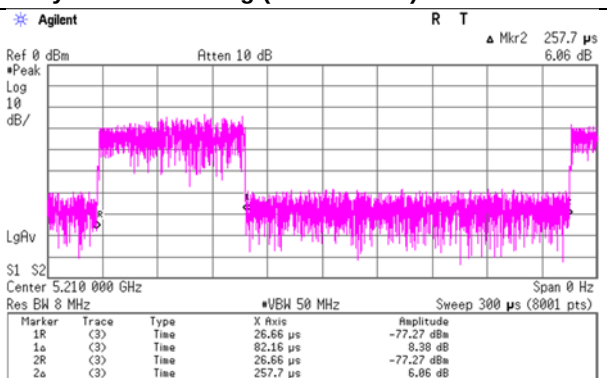

Radiated Spurious Emission

Test place	Ise EMC Lab.			
Semi Anechoic Chamber	No.2	No.2	No.2	No.2
Date	November 15, 2023	November 19, 2023	November 19, 2023	November 16, 2023
Temperature / Humidity	22 deg. C / 41 % RH	20 deg. C / 40 % RH	20 deg. C / 40 % RH	21 deg. C / 40 % RH
Engineer	Tomoya Sone (1 GHz to 10 GHz)	Junya Okuno (10 GHz to 18 GHz)	Kiyoshiro Okazaki (18 GHz to 26.5 GHz)	Daiki Matsui (26.5 GHz to 40 GHz, Below 1 GHz)
Mode	Tx 11a 5180 MHz			

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	61.4	24.8	-	7.5	7.0	28.5	-	10.7	-	40.0	-	29.3	-	
Hori.	71.7	26.6	-	6.3	7.1	28.5	-	11.5	-	40.0	-	28.5	-	
Hori.	103.8	22.8	-	10.8	7.4	28.4	-	12.5	-	43.5	-	31.0	-	
Hori.	108.0	29.2	-	11.4	7.4	28.4	-	19.6	-	43.5	-	23.9	-	
Hori.	137.6	23.5	-	14.2	7.7	28.3	-	17.1	-	43.5	-	26.5	-	
Hori.	270.0	27.5	-	13.2	8.5	27.8	-	21.5	-	46.0	-	24.6	-	
Hori.	1580.0	47.0	40.4	25.3	3.5	35.5	-	40.2	33.6	73.9	53.9	33.7	20.3	
Hori.	2500.0	45.8	38.3	27.5	4.0	34.9	-	42.5	34.9	73.9	53.9	31.5	19.0	
Hori.	4739.9	44.0	37.2	31.5	5.0	34.1	-	46.3	39.5	73.9	53.9	27.6	14.4	
Hori.	5000.0	46.2	42.1	31.8	5.1	34.2	-	48.9	44.8	73.9	53.9	25.0	9.1	
Hori.	5150.0	42.6	32.4	31.9	5.1	34.1	2.2	45.5	37.6	73.9	53.9	28.4	16.3	*1)
Hori.	6319.9	44.8	-	33.3	5.5	34.0	-	49.6	-	68.2	-	18.6	-	
Hori.	10000.0	45.8	-	39.6	-2.9	34.7	-	47.7	-	68.2	-	20.5	-	
Hori.	10360.0	45.0	-	39.9	-2.8	34.5	-	47.7	-	68.2	-	20.5	-	
Hori.	11250.0	44.0	38.1	40.1	-2.4	33.9	-	47.7	41.8	73.9	53.9	26.3	12.1	
Hori.	12500.0	45.9	40.5	39.2	-2.0	33.5	-	49.6	44.2	73.9	53.9	24.3	9.7	
Hori.	15540.0	44.4	35.8	37.2	-1.2	33.4	-	47.0	38.4	73.9	53.9	26.9	15.5	Floor noise
Vert.	58.9	25.4	-	8.1	7.0	28.5	-	11.9	-	40.0	-	28.1	-	
Vert.	61.4	30.5	-	7.5	7.0	28.5	-	16.4	-	40.0	-	23.6	-	
Vert.	86.0	28.2	-	7.7	7.2	28.5	-	14.7	-	40.0	-	25.3	-	
Vert.	98.0	28.2	-	9.8	7.4	28.4	-	17.0	-	43.5	-	26.6	-	
Vert.	108.0	30.8	-	11.4	7.4	28.4	-	21.2	-	43.5	-	22.3	-	
Vert.	270.0	27.5	-	13.2	8.5	27.8	-	21.5	-	46.0	-	24.6	-	
Vert.	1580.0	48.4	41.6	25.3	3.5	35.5	-	41.6	34.9	73.9	53.9	32.3	19.0	
Vert.	2500.0	45.9	37.5	27.5	4.0	34.9	-	42.5	34.1	73.9	53.9	31.4	19.8	
Vert.	4739.9	44.7	37.8	31.5	5.0	34.1	-	47.0	40.1	73.9	53.9	26.9	13.8	
Vert.	5000.0	46.5	41.3	31.8	5.1	34.2	-	49.2	44.0	73.9	53.9	24.7	9.9	
Vert.	5150.0	45.8	34.4	31.9	5.1	34.1	2.2	48.7	39.6	73.9	53.9	25.2	14.3	*1)
Vert.	6319.9	44.8	-	33.3	5.5	34.0	-	49.7	-	68.2	-	18.5	-	
Vert.	10000.0	45.5	-	39.6	-2.9	34.7	-	47.5	-	68.2	-	20.7	-	
Vert.	10360.0	44.3	-	39.9	-2.8	34.5	-	46.9	-	68.2	-	21.3	-	
Vert.	11250.0	44.5	37.7	40.1	-2.4	33.9	-	48.2	41.4	73.9	53.9	25.7	12.5	
Vert.	12500.0	45.9	39.9	39.2	-2.0	33.5	-	49.5	43.6	73.9	53.9	24.4	10.3	
Vert.	15540.0	44.3	35.9	37.2	-1.2	33.4	-	46.9	38.5	73.9	53.9	27.0	15.4	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)
Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor
*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).
*QP detector was used up to 1GHz.
*1) Not Out of Band emission(Leakage Power)



Distance factor: 1 GHz - 10 GHz 20log (3.6 m / 3.0 m) = 1.59 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer

Mode

Ise EMC Lab.
No.2
November 15, 2023
22 deg. C / 41 % RH
Tomoya Sone
(1 GHz to 10 GHz)
Tx 11a 5180 MHz

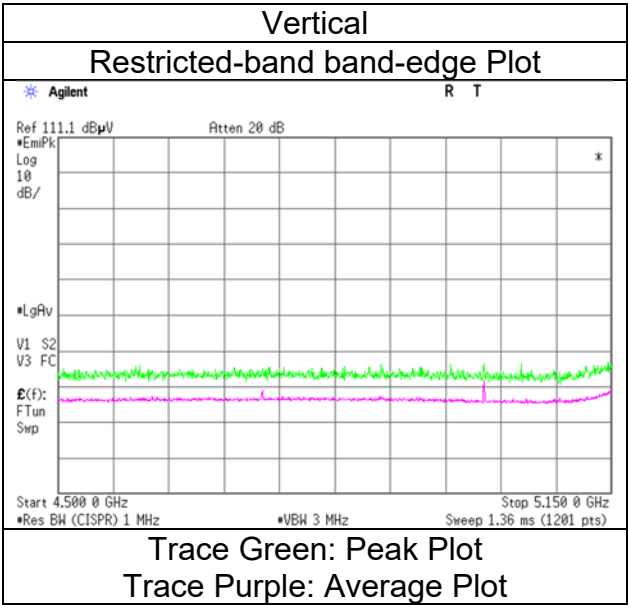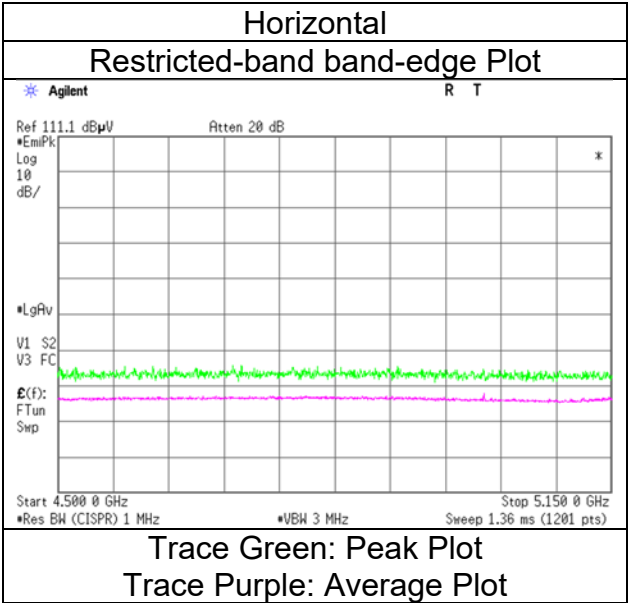

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.			
Semi Anechoic Chamber	No.2	No.2	No.2	No.2
Date	November 15, 2023	November 19, 2023	November 19, 2023	November 16, 2023
Temperature / Humidity	22 deg. C / 41 % RH	20 deg. C / 40 % RH	20 deg. C / 40 % RH	21 deg. C / 40 % RH
Engineer	Tomoya Sone (1 GHz to 10 GHz)	Junya Okuno (10 GHz to 18 GHz)	Kiyoshiro Okazaki (18 GHz to 26.5 GHz)	Daiki Matsui (26.5 GHz to 40 GHz)
Mode	Tx 11a 5220 MHz			

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	1580.0	46.8	40.2	25.3	3.5	35.5	-	40.0	33.5	73.9	53.9	33.9	20.4	
Hori.	2500.0	45.6	38.2	27.5	4.0	34.9	-	42.3	34.8	73.9	53.9	31.7	19.1	
Hori.	4739.9	44.0	37.1	31.5	5.0	34.1	-	46.3	39.4	73.9	53.9	27.7	14.5	
Hori.	5000.0	46.0	41.9	31.8	5.1	34.2	-	48.7	44.6	73.9	53.9	25.2	9.3	
Hori.	6319.9	44.7	-	33.3	5.5	34.0	-	49.5	-	68.2	-	18.7	-	
Hori.	10000.0	45.7	-	39.6	-2.9	34.7	-	47.6	-	68.2	-	20.6	-	
Hori.	10440.0	44.4	-	39.8	-2.7	34.4	-	47.0	-	68.2	-	21.2	-	
Hori.	11250.0	43.8	38.1	40.1	-2.4	33.9	-	47.5	41.8	73.9	53.9	26.5	12.1	
Hori.	12500.0	45.9	40.6	39.2	-2.0	33.5	-	49.6	44.3	73.9	53.9	24.3	9.6	
Hori.	15660.0	45.1	36.2	37.1	-1.2	33.5	-	47.5	38.6	73.9	53.9	26.4	15.3	Floor noise
Vert.	1580.0	48.2	41.6	25.3	3.5	35.5	-	41.5	34.8	73.9	53.9	32.4	19.1	
Vert.	2500.0	45.9	37.5	27.5	4.0	34.9	-	42.5	34.1	73.9	53.9	31.4	19.8	
Vert.	4739.9	44.6	37.6	31.5	5.0	34.1	-	46.9	39.9	73.9	53.9	27.0	14.0	
Vert.	5000.0	46.3	41.2	31.8	5.1	34.2	-	49.0	43.9	73.9	53.9	24.9	10.0	
Vert.	6319.9	44.7	-	33.3	5.5	34.0	-	49.6	-	68.2	-	18.7	-	
Vert.	10000.0	45.2	-	39.6	-2.9	34.7	-	47.1	-	68.2	-	21.1	-	
Vert.	10440.0	44.0	-	39.8	-2.7	34.4	-	46.6	-	68.2	-	21.6	-	
Vert.	11250.0	44.8	37.7	40.1	-2.4	33.9	-	48.5	41.4	73.9	53.9	25.4	12.5	
Vert.	12500.0	45.6	39.8	39.2	-2.0	33.5	-	49.2	43.5	73.9	53.9	24.7	10.4	
Vert.	15660.0	45.1	36.1	37.1	-1.2	33.5	-	47.5	38.5	73.9	53.9	26.4	15.4	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz

Distance factor: 1 GHz - 10 GHz $20\log(3.6\text{ m} / 3.0\text{ m}) = 1.59\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.			
Semi Anechoic Chamber	No.2	No.2	No.2	No.2
Date	November 15, 2023	November 19, 2023	November 19, 2023	November 16, 2023
Temperature / Humidity	22 deg. C / 41 % RH	20 deg. C / 40 % RH	20 deg. C / 40 % RH	21 deg. C / 40 % RH
Engineer	Tomoya Sone (1 GHz to 10 GHz)	Junya Okuno (10 GHz to 18 GHz)	Kiyoshiro Okazaki (18 GHz to 26.5 GHz)	Daiki Matsui (26.5 GHz to 40 GHz)
Mode	Tx 11a 5240 MHz			

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	1580.0	46.9	40.4	25.3	3.5	35.5	-	40.1	33.6	73.9	53.9	33.8	20.3	
Hori.	2500.0	45.7	38.3	27.5	4.0	34.9	-	42.3	34.9	73.9	53.9	31.6	19.0	
Hori.	4739.9	44.1	37.1	31.5	5.0	34.1	-	46.4	39.4	73.9	53.9	27.6	14.5	
Hori.	5000.0	46.1	42.0	31.8	5.1	34.2	-	48.8	44.7	73.9	53.9	25.1	9.2	
Hori.	5350.0	42.6	31.9	31.7	5.2	34.0	2.2	45.5	37.0	73.9	53.9	28.4	17.0	*1)
Hori.	6319.9	44.8	-	33.3	5.5	34.0	-	49.6	-	68.2	-	18.6	-	
Hori.	10000.0	45.6	-	39.6	-2.9	34.7	-	47.6	-	68.2	-	20.6	-	
Hori.	10480.0	44.9	-	39.7	-2.7	34.4	-	47.5	-	68.2	-	20.7	-	
Hori.	11250.0	44.0	38.3	40.1	-2.4	33.9	-	47.7	42.0	73.9	53.9	26.2	11.9	
Hori.	12500.0	46.1	40.4	39.2	-2.0	33.5	-	49.8	44.1	73.9	53.9	24.1	9.8	
Hori.	15720.0	44.6	36.2	37.2	-1.2	33.5	-	47.0	38.6	73.9	53.9	26.9	15.3	Floor noise
Vert.	1580.0	48.3	41.7	25.3	3.5	35.5	-	41.6	34.9	73.9	53.9	32.3	19.0	
Vert.	2500.0	45.9	37.6	27.5	4.0	34.9	-	42.5	34.2	73.9	53.9	31.4	19.7	
Vert.	4739.9	44.8	37.5	31.5	5.0	34.1	-	47.1	39.8	73.9	53.9	26.8	14.1	
Vert.	5000.0	46.4	41.4	31.8	5.1	34.2	-	49.1	44.1	73.9	53.9	24.8	9.8	
Vert.	5350.0	42.3	32.1	31.7	5.2	34.0	2.2	45.1	37.1	73.9	53.9	28.8	16.8	*1)
Vert.	6319.9	44.9	-	33.3	5.5	34.0	-	49.7	-	68.2	-	18.5	-	
Vert.	10000.0	45.5	-	39.6	-2.9	34.7	-	47.5	-	68.2	-	20.7	-	
Vert.	10480.0	44.5	-	39.7	-2.7	34.4	-	47.2	-	68.2	-	21.0	-	
Vert.	11250.0	44.5	37.7	40.1	-2.4	33.9	-	48.2	41.4	73.9	53.9	25.8	12.5	
Vert.	12500.0	45.6	39.7	39.2	-2.0	33.5	-	49.2	43.4	73.9	53.9	24.7	10.5	
Vert.	15720.0	44.8	36.1	37.2	-1.2	33.5	-	47.2	38.6	73.9	53.9	26.7	15.3	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.



*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz 20log (3.6 m / 3.0 m) = 1.59 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab.
No.2
November 15, 2023
22 deg. C / 41 % RH
Tomoya Sone
Tx 11a 5240 MHz

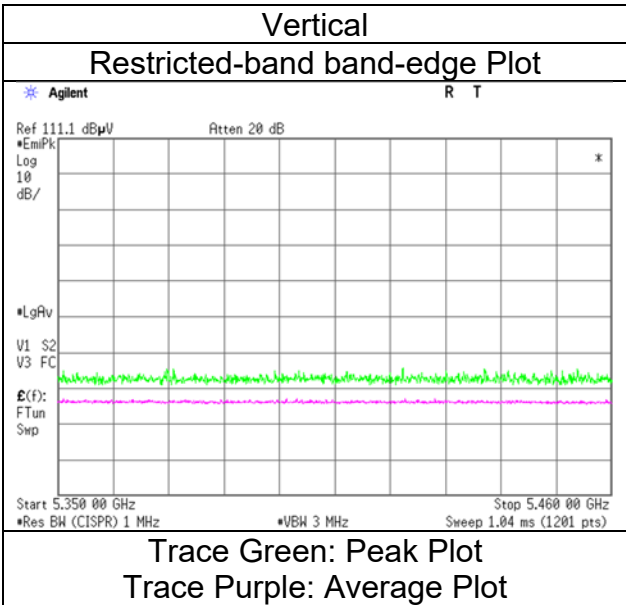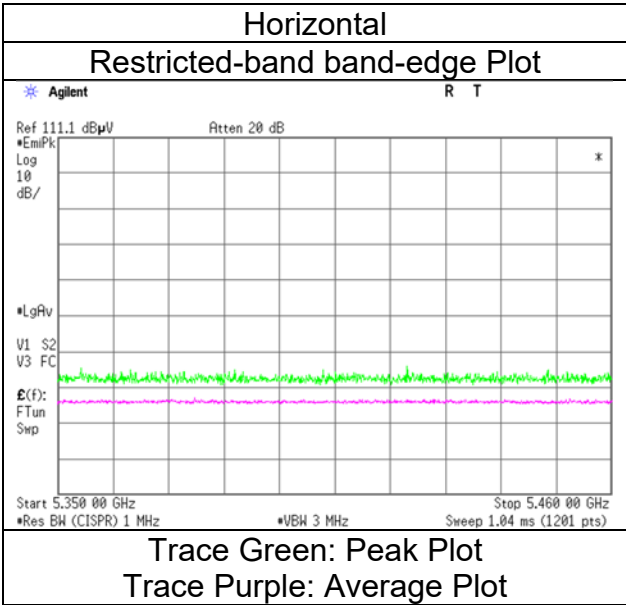

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.			
Semi Anechoic Chamber	No.2	No.2	No.2	No.2
Date	November 15, 2023	November 19, 2023	November 19, 2023	November 16, 2023
Temperature / Humidity	22 deg. C / 41 % RH	20 deg. C / 40 % RH	20 deg. C / 40 % RH	21 deg. C / 40 % RH
Engineer	Tomoya Sone (1 GHz to 10 GHz)	Junya Okuno (10 GHz to 18 GHz)	Kiyoshiro Okazaki (18 GHz to 26.5 GHz)	Daiki Matsui (26.5 GHz to 40 GHz)
Mode	Tx 11a 5745 MHz			

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	1580.0	46.7	40.2	25.3	3.5	35.5	-	40.0	33.5	73.9	53.9	33.9	20.4	
Hori.	2500.0	45.6	38.2	27.5	4.0	34.9	-	42.2	34.8	73.9	53.9	31.7	19.1	
Hori.	4739.9	44.0	37.1	31.5	5.0	34.1	-	46.3	39.4	73.9	53.9	27.7	14.6	
Hori.	5000.0	46.0	41.9	31.8	5.1	34.2	-	48.7	44.6	73.9	53.9	25.2	9.3	
Hori.	5650.0	42.8	-	31.8	5.3	33.9	-	46.0	-	68.2	-	22.3	-	
Hori.	5700.0	42.5	-	31.9	5.3	33.9	-	45.7	-	105.2	-	59.5	-	
Hori.	5720.0	43.6	-	32.0	5.3	33.9	-	46.9	-	110.8	-	63.9	-	
Hori.	5725.0	45.5	-	32.0	5.3	33.9	-	48.8	-	122.2	-	73.4	-	
Hori.	6319.9	44.8	-	33.3	5.5	34.0	-	49.6	-	68.2	-	18.6	-	
Hori.	10000.0	45.7	-	39.6	-2.9	34.7	-	47.7	-	68.2	-	20.5	-	
Hori.	11250.0	43.9	38.2	40.1	-2.4	33.9	-	47.6	41.9	73.9	53.9	26.3	12.0	
Hori.	11490.0	44.5	38.0	40.1	-2.3	33.9	2.2	48.4	44.1	73.9	53.9	25.5	9.8	
Hori.	12500.0	45.9	40.7	39.2	-2.0	33.5	-	49.6	44.4	73.9	53.9	24.3	9.5	
Hori.	17235.0	44.8	-	42.1	-0.9	33.1	-	53.0	-	68.2	-	15.2	-	Floor noise
Vert.	1580.0	48.3	41.6	25.3	3.5	35.5	-	41.5	34.8	73.9	53.9	32.4	19.1	
Vert.	2500.0	45.9	37.5	27.5	4.0	34.9	-	42.5	34.2	73.9	53.9	31.4	19.8	
Vert.	4739.9	44.7	37.5	31.5	5.0	34.1	-	47.0	39.8	73.9	53.9	27.0	14.1	
Vert.	5000.0	46.4	41.2	31.8	5.1	34.2	-	49.1	43.9	73.9	53.9	24.8	10.0	
Vert.	5650.0	44.3	-	31.8	5.3	33.9	-	47.5	-	68.2	-	20.7	-	
Vert.	5700.0	43.5	-	31.9	5.3	33.9	-	46.7	-	105.2	-	58.5	-	
Vert.	5720.0	49.0	-	32.0	5.3	33.9	-	52.3	-	110.8	-	58.5	-	
Vert.	5725.0	51.1	-	32.0	5.3	33.9	-	54.4	-	122.2	-	67.8	-	
Vert.	6319.9	44.9	-	33.3	5.5	34.0	-	49.7	-	68.2	-	18.5	-	
Vert.	10000.0	45.5	-	39.6	-2.9	34.7	-	47.5	-	68.2	-	20.7	-	
Vert.	11250.0	44.1	37.5	40.1	-2.4	33.9	-	47.8	41.2	73.9	53.9	26.1	12.7	
Vert.	11490.0	45.4	39.5	40.1	-2.3	33.9	2.2	49.3	45.6	73.9	53.9	24.6	8.4	
Vert.	12500.0	45.3	39.7	39.2	-2.0	33.5	-	48.9	43.4	73.9	53.9	25.0	10.5	
Vert.	17235.0	44.7	-	42.1	-0.9	33.1	-	52.8	-	68.2	-	15.4	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz 20log (3.6 m / 3.0 m) = 1.59 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab.
No.2
November 15, 2023
22 deg. C / 41 % RH
Tomoya Sone
Tx 11a 5745 MHz

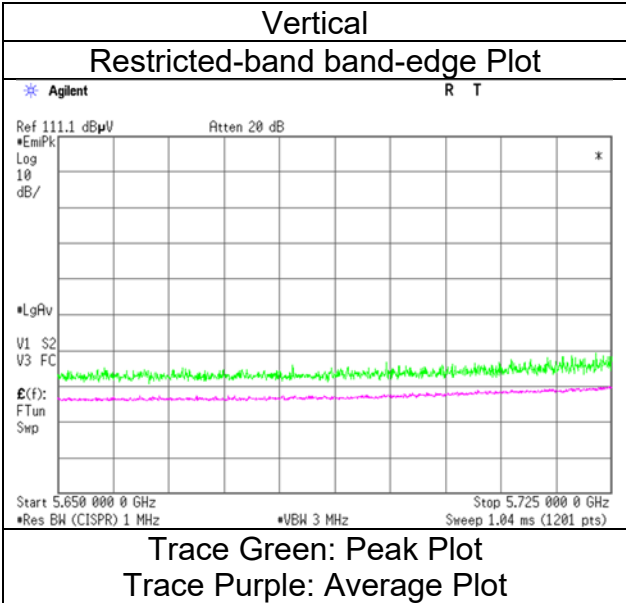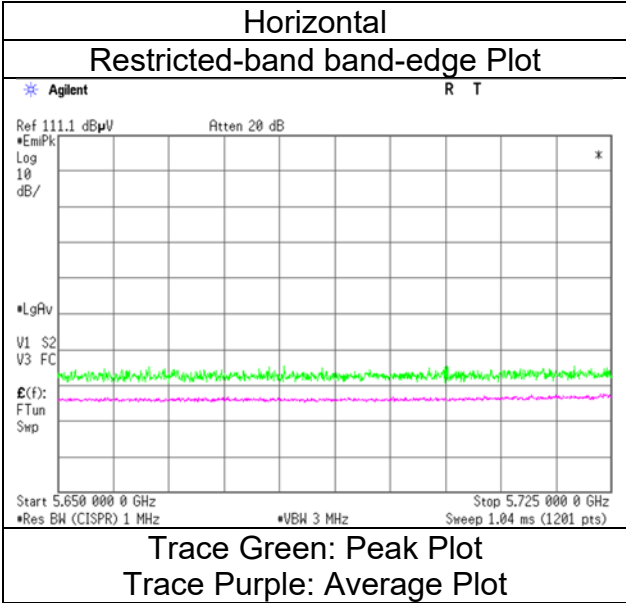

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.			
Semi Anechoic Chamber	No.2	No.2	No.2	No.2
Date	November 15, 2023	November 19, 2023	November 19, 2023	November 16, 2023
Temperature / Humidity	22 deg. C / 41 % RH	20 deg. C / 40 % RH	20 deg. C / 40 % RH	21 deg. C / 40 % RH
Engineer	Tomoya Sone (1 GHz to 10 GHz)	Junya Okuno (10 GHz to 18 GHz)	Kiyoshiro Okazaki (18 GHz to 26.5 GHz)	Daiki Matsui (26.5 GHz to 40 GHz)
Mode	Tx 11a 5785 MHz			

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dBm]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	1580.0	46.9	40.5	25.3	3.5	35.5	-	40.2	33.7	73.9	53.9	33.7	20.2	
Hori.	2500.0	45.7	38.4	27.5	4.0	34.9	-	42.4	35.0	73.9	53.9	31.6	18.9	
Hori.	5000.0	46.0	41.9	31.8	5.1	34.2	-	48.7	44.6	73.9	53.9	25.3	9.3	
Hori.	6319.9	44.9	-	33.3	5.5	34.0	-	49.8	-	68.2	-	18.5	-	
Hori.	10000.0	45.9	-	39.6	-2.9	34.7	-	47.8	-	68.2	-	20.4	-	
Hori.	11250.0	43.6	38.2	40.1	-2.4	33.9	-	47.3	41.8	73.9	53.9	26.6	12.1	
Hori.	11570.0	44.0	36.0	39.7	-2.3	33.9	2.2	47.6	41.8	73.9	53.9	26.3	12.1	
Hori.	12500.0	46.3	40.5	39.2	-2.0	33.5	-	50.0	44.2	73.9	53.9	23.9	9.7	
Hori.	17355.0	44.6	-	43.2	-0.9	33.0	-	53.9	-	68.2	-	14.3	-	Floor noise
Vert.	1580.0	48.4	41.7	25.3	3.5	35.5	-	41.7	35.0	73.9	53.9	32.3	18.9	
Vert.	2500.0	46.0	37.8	27.5	4.0	34.9	-	42.6	34.4	73.9	53.9	31.3	19.5	
Vert.	5000.0	46.6	41.4	31.8	5.1	34.2	-	49.3	44.1	73.9	53.9	24.6	9.8	
Vert.	6319.9	45.1	-	33.3	5.5	34.0	-	49.9	-	68.2	-	18.3	-	
Vert.	10000.0	45.6	-	39.6	-2.9	34.7	-	47.6	-	68.2	-	20.7	-	
Vert.	11250.0	44.5	37.6	40.1	-2.4	33.9	-	48.2	41.3	73.9	53.9	25.7	12.6	
Vert.	11570.0	45.3	37.8	39.7	-2.3	33.9	2.2	48.8	43.6	73.9	53.9	25.1	10.3	
Vert.	12500.0	45.8	39.9	39.2	-2.0	33.5	-	49.5	43.6	73.9	53.9	24.5	10.3	
Vert.	17355.0	44.7	-	43.2	-0.9	33.0	-	54.0	-	68.2	-	14.2	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)
 Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor
 *Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).
 *QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz $20\log(3.6\text{ m} / 3.0\text{ m}) = 1.59\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.			
Semi Anechoic Chamber	No.2	No.2	No.2	No.2
Date	November 15, 2023	November 19, 2023	November 19, 2023	November 16, 2023
Temperature / Humidity	22 deg. C / 41 % RH	20 deg. C / 40 % RH	20 deg. C / 40 % RH	21 deg. C / 40 % RH
Engineer	Tomoya Sone (1 GHz to 10 GHz)	Junya Okuno (10 GHz to 18 GHz)	Kiyoshiro Okazaki (18 GHz to 26.5 GHz)	Daiki Matsui (26.5 GHz to 40 GHz)
Mode	Tx 11a 5825 MHz			

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	1580.0	46.8	40.4	25.3	3.5	35.5	-	40.1	33.6	73.9	53.9	33.8	20.3	
Hori.	2500.0	45.7	38.3	27.5	4.0	34.9	-	42.3	34.9	73.9	53.9	31.6	19.0	
Hori.	5000.0	45.8	41.9	31.8	5.1	34.2	-	48.5	44.6	73.9	53.9	25.4	9.3	
Hori.	5850.0	51.8	-	32.3	5.4	34.0	-	55.4	-	122.2	-	66.8	-	
Hori.	5855.0	49.3	-	32.3	5.4	34.0	-	53.0	-	110.8	-	57.8	-	
Hori.	5875.0	43.0	-	32.3	5.4	34.0	-	46.7	-	105.2	-	58.5	-	
Hori.	5925.0	41.3	-	32.4	5.4	34.0	-	45.1	-	68.2	-	23.1	-	
Hori.	6319.9	44.9	-	33.3	5.5	34.0	-	49.7	-	68.2	-	18.5	-	
Hori.	10000.0	45.9	-	39.6	-2.9	34.7	-	47.8	-	68.2	-	20.4	-	
Hori.	11250.0	43.9	38.1	40.1	-2.4	33.9	-	47.6	41.8	73.9	53.9	26.3	12.1	
Hori.	11650.0	44.7	37.6	39.3	-2.2	33.9	2.2	47.9	43.0	73.9	53.9	26.0	10.9	
Hori.	12500.0	45.9	40.5	39.2	-2.0	33.5	-	49.6	44.2	73.9	53.9	24.4	9.7	
Hori.	17475.0	44.4	-	44.2	-0.8	32.9	-	54.8	-	68.2	-	13.4	-	Floor noise
Vert.	1580.0	48.3	41.6	25.3	3.5	35.5	-	41.6	34.9	73.9	53.9	32.3	19.0	
Vert.	2500.0	46.0	37.7	27.5	4.0	34.9	-	42.6	34.3	73.9	53.9	31.3	19.6	
Vert.	5000.0	46.5	41.4	31.8	5.1	34.2	-	49.2	44.1	73.9	53.9	24.7	9.8	
Vert.	5850.0	58.4	-	32.3	5.4	34.0	-	62.1	-	122.2	-	60.1	-	
Vert.	5855.0	54.8	-	32.3	5.4	34.0	-	58.5	-	110.8	-	52.4	-	
Vert.	5875.0	43.9	-	32.3	5.4	34.0	-	47.6	-	105.2	-	57.6	-	
Vert.	5925.0	41.8	-	32.4	5.4	34.0	-	45.6	-	68.2	-	22.6	-	
Vert.	6319.9	45.0	-	33.3	5.5	34.0	-	49.8	-	68.2	-	18.4	-	
Vert.	10000.0	45.5	-	39.6	-2.9	34.7	-	47.5	-	68.2	-	20.7	-	
Vert.	11250.0	44.2	37.6	40.1	-2.4	33.9	-	47.9	41.3	73.9	53.9	26.0	12.7	
Vert.	11650.0	45.4	38.9	39.3	-2.2	33.9	2.2	48.6	44.3	73.9	53.9	25.4	9.6	
Vert.	12500.0	45.4	39.8	39.2	-2.0	33.5	-	49.1	43.5	73.9	53.9	24.8	10.4	
Vert.	17475.0	44.5	-	44.2	-0.8	32.9	-	55.0	-	68.2	-	13.3	-	Floor noise



Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)
Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor
*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).
*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz $20\log(3.6\text{ m} / 3.0\text{ m}) = 1.59\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission

Test place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab.
No.2
November 15, 2023
22 deg. C / 41 % RH
Tomoya Sone
Tx 11a 5825 MHz

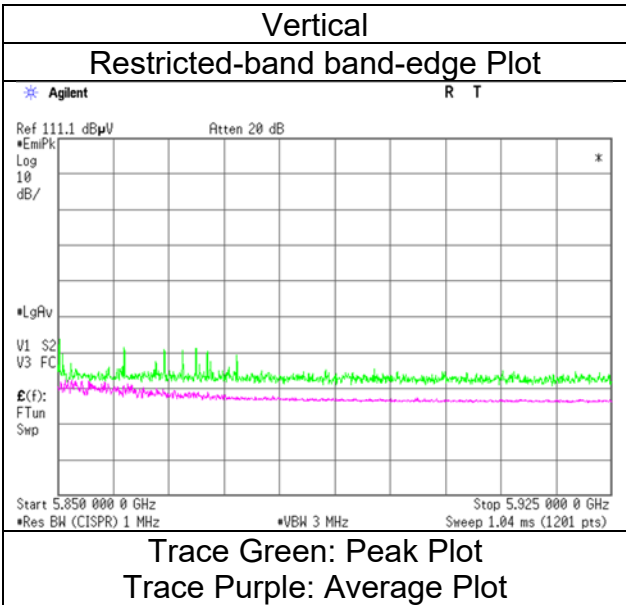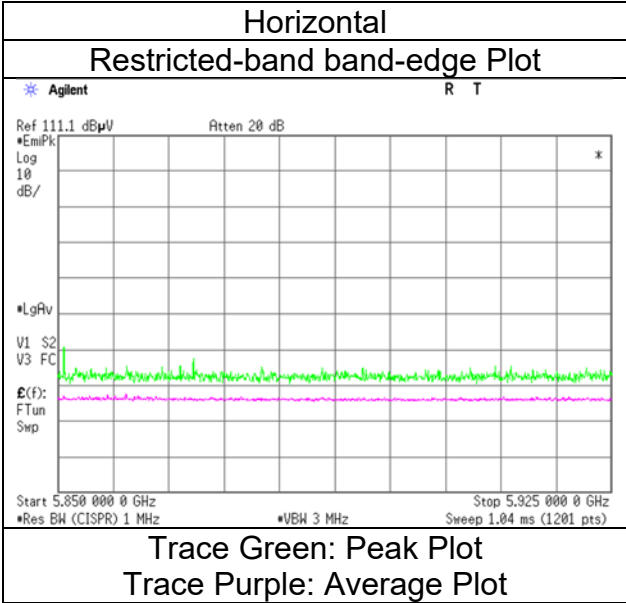

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.			
Semi Anechoic Chamber	No.2	No.2	No.2	No.2
Date	November 16, 2023	November 19, 2023	November 19, 2023	November 16, 2023
Temperature / Humidity	23 deg. C / 47 % RH	20 deg. C / 40 % RH	20 deg. C / 40 % RH	21 deg. C / 40 % RH
Engineer	Tomoya Sone (1 GHz to 10 GHz)	Junya Okuno (10 GHz to 18 GHz)	Kiyoshiro Okazaki (18 GHz to 26.5 GHz)	Daiki Matsui (26.5 GHz to 40 GHz)
Mode	Tx 11ac-20 5180 MHz			

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	1580.0	49.0	42.7	25.3	3.5	35.5	-	42.3	35.9	73.9	53.9	31.6	18.0	
Hori.	2500.0	46.9	39.2	27.5	4.0	34.9	-	43.5	35.8	73.9	53.9	30.4	18.1	
Hori.	4739.9	43.6	37.3	31.5	5.0	34.1	-	45.9	39.6	73.9	53.9	28.0	14.3	
Hori.	5000.0	46.7	42.5	31.8	5.1	34.2	-	49.4	45.2	73.9	53.9	24.5	8.7	
Hori.	5150.0	42.5	32.5	31.9	5.1	34.1	2.6	45.4	38.0	73.9	53.9	28.5	15.9	*1)
Hori.	6319.9	45.1	-	33.3	5.5	34.0	-	49.9	-	68.2	-	18.3	-	
Hori.	6906.7	44.9	-	34.9	5.7	33.9	-	51.7	-	68.2	-	16.5	-	
Hori.	10000.0	45.6	-	39.6	-2.9	34.7	-	47.5	-	68.2	-	20.7	-	
Hori.	10360.0	44.7	-	39.9	-2.8	34.5	-	47.3	-	68.2	-	20.9	-	
Hori.	11250.0	43.9	38.1	40.1	-2.4	33.9	-	47.6	41.8	73.9	53.9	26.3	12.1	
Hori.	12500.0	45.9	40.4	39.2	-2.0	33.5	-	49.5	44.1	73.9	53.9	24.4	9.9	
Hori.	15540.0	44.6	35.9	37.2	-1.2	33.4	-	47.2	38.4	73.9	53.9	26.7	15.5	Floor noise
Vert.	1580.0	49.3	42.6	25.3	3.5	35.5	-	42.5	35.8	73.9	53.9	31.4	18.1	
Vert.	2500.0	45.9	39.1	27.5	4.0	34.9	-	42.5	35.8	73.9	53.9	31.4	18.1	
Vert.	4739.9	44.2	37.8	31.5	5.0	34.1	-	46.5	40.1	73.9	53.9	27.4	13.8	
Vert.	5000.0	46.0	41.6	31.8	5.1	34.2	-	48.7	44.3	73.9	53.9	25.2	9.6	
Vert.	5150.0	46.2	34.8	31.9	5.1	34.1	2.6	49.1	40.3	68.2	-	19.1	-	*1)
Vert.	6319.9	45.3	-	33.3	5.5	34.0	-	50.2	-	68.2	-	18.1	-	
Vert.	6906.7	44.7	-	34.9	5.7	33.9	-	51.4	-	73.9	-	22.5	-	
Vert.	10000.0	45.6	-	39.6	-2.9	34.7	-	47.5	-	68.2	-	20.7	-	
Vert.	10360.0	44.3	-	39.9	-2.8	34.5	-	46.9	-	68.2	-	21.3	-	
Vert.	11250.0	44.7	37.7	40.1	-2.4	33.9	-	48.4	41.4	73.9	53.9	25.5	12.5	
Vert.	12500.0	45.5	39.7	39.2	-2.0	33.5	-	49.2	43.4	73.9	53.9	24.7	10.5	
Vert.	15540.0	44.5	35.8	37.2	-1.2	33.4	-	47.1	38.4	73.9	53.9	26.8	15.5	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.



*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz $20\log(3.6\text{ m} / 3.0\text{ m}) = 1.59\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission

Test place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab.
No.2
November 16, 2023
23 deg. C / 47 % RH
Tomoya Sone
Tx 11ac-20 5180 MHz

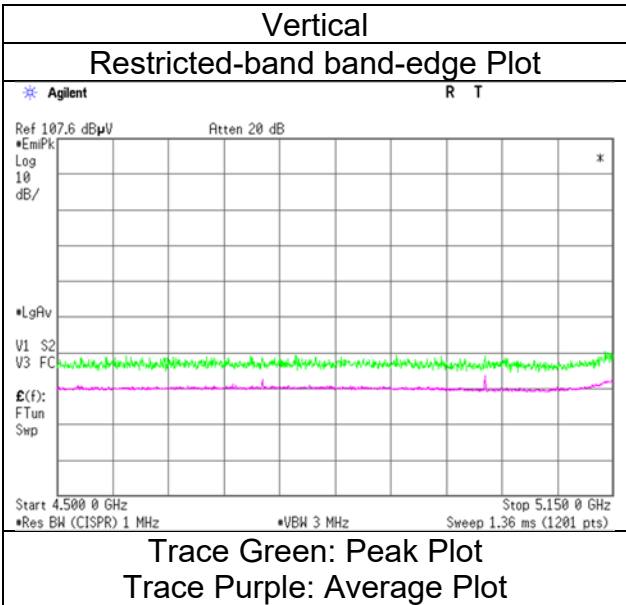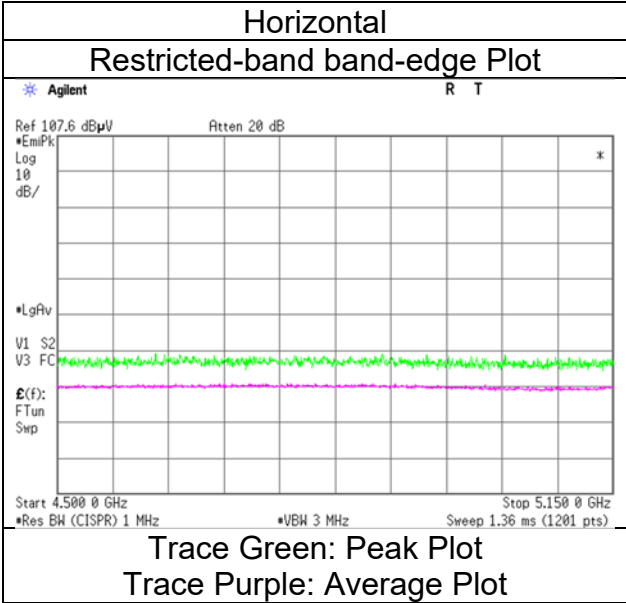

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.			
Semi Anechoic Chamber	No.2	No.2	No.2	No.2
Date	November 16, 2023	November 19, 2023	November 19, 2023	November 16, 2023
Temperature / Humidity	23 deg. C / 47 % RH	20 deg. C / 40 % RH	20 deg. C / 40 % RH	21 deg. C / 40 % RH
Engineer	Tomoya Sone (1 GHz to 10 GHz)	Junya Okuno (10 GHz to 18 GHz)	Kiyoshiro Okazaki (18 GHz to 26.5 GHz)	Daiki Matsui (26.5 GHz to 40 GHz)
Mode	Tx 11ac-20 5220 MHz			

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	1580.0	49.2	42.7	25.3	3.5	35.5	-	42.4	36.0	73.9	53.9	31.5	17.9	
Hori.	2500.0	47.0	39.2	27.5	4.0	34.9	-	43.6	35.9	73.9	53.9	30.3	18.0	
Hori.	4739.9	43.8	37.4	31.5	5.0	34.1	-	46.1	39.7	73.9	53.9	27.9	14.2	
Hori.	5000.0	46.9	42.5	31.8	5.1	34.2	-	49.6	45.2	73.9	53.9	24.3	8.7	
Hori.	6319.9	45.2	-	33.3	5.5	34.0	-	50.0	-	68.2	-	18.2	-	
Hori.	6960.0	45.0	-	35.2	5.7	33.9	-	52.0	-	68.2	-	16.2	-	
Hori.	10000.0	46.0	-	39.6	-2.9	34.7	-	48.0	-	68.2	-	20.2	-	
Hori.	10440.0	44.4	-	39.8	-2.7	34.4	-	47.1	-	68.2	-	21.2	-	
Hori.	11250.0	43.8	38.0	40.1	-2.4	33.9	-	47.5	41.7	73.9	53.9	26.4	12.2	
Hori.	12500.0	46.0	40.4	39.2	-2.0	33.5	-	49.7	44.1	73.9	53.9	24.2	9.8	
Hori.	15660.0	45.2	36.1	37.1	-1.2	33.5	-	47.6	38.5	73.9	53.9	26.4	15.4	Floor noise
Vert.	1580.0	49.3	42.6	25.3	3.5	35.5	-	42.6	35.9	73.9	53.9	31.3	18.0	
Vert.	2500.0	46.0	39.2	27.5	4.0	34.9	-	42.6	35.9	73.9	53.9	31.3	18.1	
Vert.	4739.9	44.3	38.0	31.5	5.0	34.1	-	46.6	40.3	73.9	53.9	27.3	13.6	
Vert.	5000.0	46.2	41.6	31.8	5.1	34.2	-	48.9	44.3	73.9	53.9	25.0	9.6	
Vert.	6319.9	45.5	-	33.3	5.5	34.0	-	50.3	-	68.2	-	17.9	-	
Vert.	6960.0	44.3	-	35.2	5.7	33.9	-	51.4	-	68.2	-	16.8	-	
Vert.	10000.0	45.8	-	39.6	-2.9	34.7	-	47.8	-	68.2	-	20.5	-	
Vert.	10440.0	43.9	-	39.8	-2.7	34.4	-	46.5	-	68.2	-	21.7	-	
Vert.	11250.0	44.4	37.7	40.1	-2.4	33.9	-	48.0	41.3	73.9	53.9	25.9	12.6	
Vert.	12500.0	45.6	39.9	39.2	-2.0	33.5	-	49.3	43.6	73.9	53.9	24.6	10.3	
Vert.	15660.0	45.2	36.1	37.1	-1.2	33.5	-	47.6	38.5	73.9	53.9	26.3	15.4	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz 20log (3.6 m / 3.0 m) = 1.59 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test place	Ise EMC Lab.			
Semi Anechoic Chamber	No.2	No.2	No.2	No.2
Date	November 16, 2023	November 19, 2023	November 19, 2023	November 16, 2023
Temperature / Humidity	23 deg. C / 47 % RH	20 deg. C / 40 % RH	20 deg. C / 40 % RH	21 deg. C / 40 % RH
Engineer	Tomoya Sone (1 GHz to 10 GHz)	Junya Okuno (10 GHz to 18 GHz)	Kiyoshiro Okazaki (18 GHz to 26.5 GHz)	Daiki Matsui (26.5 GHz to 40 GHz)
Mode	Tx 11ac-20 5240 MHz			

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	1580.0	48.8	42.4	25.3	3.5	35.5	-	42.1	35.7	73.9	53.9	31.8	18.2	
Hori.	2500.0	46.7	39.0	27.5	4.0	34.9	-	43.4	35.6	73.9	53.9	30.6	18.3	
Hori.	4739.9	43.4	37.1	31.5	5.0	34.1	-	45.7	39.4	73.9	53.9	28.2	14.5	
Hori.	5000.0	46.6	42.2	31.8	5.1	34.2	-	49.3	44.9	73.9	53.9	24.6	9.0	
Hori.	5350.0	42.8	31.9	31.7	5.2	34.0	2.6	45.6	37.3	73.9	53.9	28.3	16.6	*1)
Hori.	6319.9	44.9	-	33.3	5.5	34.0	-	49.7	-	68.2	-	18.5	-	
Hori.	6986.7	44.6	-	35.4	5.7	33.9	-	51.9	-	68.2	-	16.4	-	
Hori.	10000.0	45.4	-	39.6	-2.9	34.7	-	47.4	-	68.2	-	20.8	-	
Hori.	10480.0	44.7	-	39.7	-2.7	34.4	-	47.3	-	68.2	-	20.9	-	
Hori.	11250.0	44.2	38.2	40.1	-2.4	33.9	-	47.9	41.9	73.9	53.9	26.0	12.0	
Hori.	12500.0	45.7	40.5	39.2	-2.0	33.5	-	49.4	44.2	73.9	53.9	24.5	9.7	
Hori.	15720.0	44.8	36.2	37.2	-1.2	33.5	-	47.2	38.6	73.9	53.9	26.7	15.3	Floor noise
Vert.	1580.0	49.1	42.4	25.3	3.5	35.5	-	42.4	35.6	73.9	53.9	31.5	18.3	
Vert.	2500.0	45.6	38.9	27.5	4.0	34.9	-	42.3	35.6	73.9	53.9	31.6	18.4	
Vert.	4739.9	44.1	37.7	31.5	5.0	34.1	-	46.4	40.0	73.9	53.9	27.5	13.9	
Vert.	5000.0	45.9	41.4	31.8	5.1	34.2	-	48.6	44.1	73.9	53.9	25.3	9.8	
Vert.	5350.0	43.0	32.3	31.7	5.2	34.0	2.6	45.8	37.8	73.9	53.9	28.1	16.1	*1)
Vert.	6319.9	45.1	-	33.3	5.5	34.0	-	50.0	-	68.2	-	18.2	-	
Vert.	6986.7	44.3	-	35.4	5.7	33.9	-	51.5	-	68.2	-	16.7	-	
Vert.	10000.0	45.3	-	39.6	-2.9	34.7	-	47.3	-	68.2	-	20.9	-	
Vert.	10480.0	44.5	-	39.7	-2.7	34.4	-	47.1	-	68.2	-	21.1	-	
Vert.	11250.0	44.5	37.9	40.1	-2.4	33.9	-	48.2	41.6	73.9	53.9	25.7	12.3	
Vert.	12500.0	45.8	39.5	39.2	-2.0	33.5	-	49.5	43.2	73.9	53.9	24.4	10.7	
Vert.	15720.0	44.8	36.1	37.2	-1.2	33.5	-	47.3	38.5	73.9	53.9	26.6	15.4	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.



*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz 20log (3.6 m / 3.0 m) = 1.59 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab.
No.2
November 16, 2023
23 deg. C / 47 % RH
Tomoya Sone
Tx 11ac-20 5240 MHz

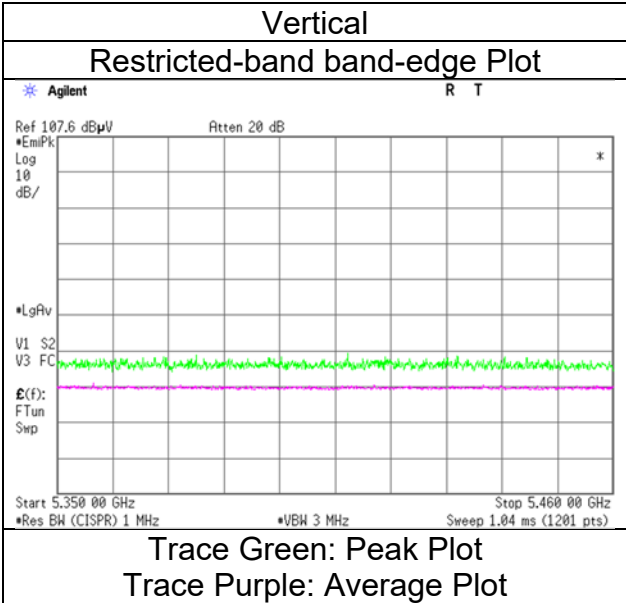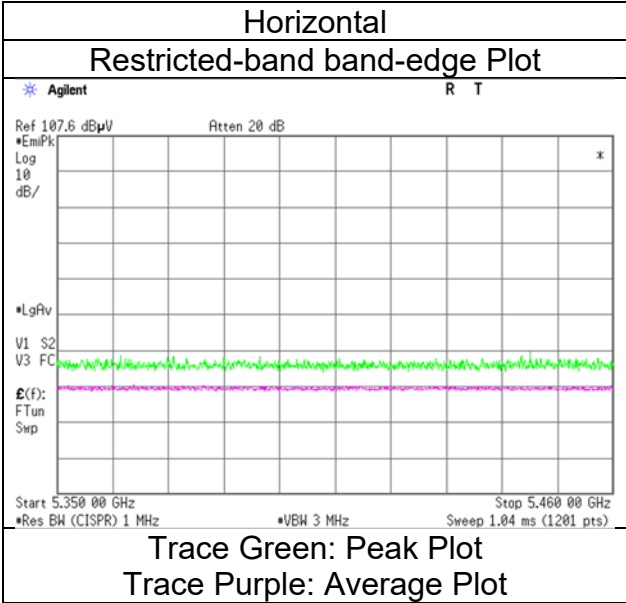

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.2	No.2	No.2
Date	November 16, 2023	November 19, 2023	November 16, 2023
Temperature / Humidity	23 deg. C / 47 % RH	20 deg. C / 40 % RH	21 deg. C / 40 % RH
Engineer	Tomoya Sone	Kiyoshiro Okazaki	Daiki Matsui
	(1 GHz to 10 GHz)	(10 GHz to 26.5 GHz)	(26.5 GHz to 40 GHz)
Mode	Tx 11ac-20 5745 MHz		

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	1580.0	49.2	42.7	25.3	3.5	35.5	-	42.4	36.0	73.9	53.9	31.5	17.9	
Hori.	2500.0	47.1	39.2	27.5	4.0	34.9	-	43.7	35.9	73.9	53.9	30.2	18.0	
Hori.	4739.9	43.8	37.4	31.5	5.0	34.1	-	46.1	39.7	73.9	53.9	27.9	14.2	
Hori.	5000.0	46.9	42.6	31.8	5.1	34.2	-	49.6	45.3	73.9	53.9	24.3	8.6	
Hori.	5650.0	41.3	-	31.8	5.3	33.9	-	44.5	-	68.2	-	23.7	-	
Hori.	5700.0	42.4	-	31.9	5.3	33.9	-	45.7	-	105.2	-	59.5	-	
Hori.	5720.0	41.9	-	32.0	5.3	33.9	-	45.3	-	110.8	-	65.6	-	
Hori.	5725.0	43.2	-	32.0	5.3	33.9	-	46.5	-	122.2	-	75.7	-	
Hori.	6319.9	45.1	-	33.3	5.5	34.0	-	50.0	-	68.2	-	18.3	-	
Hori.	10000.0	45.6	-	39.6	-2.9	34.7	-	47.6	-	68.2	-	20.6	-	
Hori.	11250.0	43.6	38.2	40.1	-2.4	33.9	-	47.2	41.9	73.9	53.9	26.7	12.0	
Hori.	11490.0	45.2	37.7	40.1	-2.3	33.9	2.6	49.0	44.2	73.9	53.9	24.9	9.8	
Hori.	12500.0	45.3	40.2	39.2	-2.0	33.5	-	48.9	43.9	73.9	53.9	25.0	10.0	
Hori.	17235.0	45.3	-	42.1	-0.9	33.1	-	53.4	-	68.2	-	14.8	-	Floor noise
Vert.	1580.0	49.4	42.7	25.3	3.5	35.5	-	42.6	35.9	73.9	53.9	31.3	18.0	
Vert.	2500.0	46.0	39.2	27.5	4.0	34.9	-	42.6	35.8	73.9	53.9	31.3	18.1	
Vert.	4739.9	44.3	38.0	31.5	5.0	34.1	-	46.6	40.3	73.9	53.9	27.3	13.7	
Vert.	5000.0	46.1	41.7	31.8	5.1	34.2	-	48.8	44.4	73.9	53.9	25.1	9.5	
Vert.	5650.0	42.6	-	31.8	5.3	33.9	-	45.7	-	68.2	-	22.5	-	
Vert.	5700.0	44.8	-	31.9	5.3	33.9	-	48.1	-	105.2	-	57.1	-	
Vert.	5720.0	45.2	-	32.0	5.3	33.9	-	48.5	-	110.8	-	62.3	-	
Vert.	5725.0	46.6	-	32.0	5.3	33.9	-	50.0	-	122.2	-	72.2	-	
Vert.	6319.9	45.5	-	33.3	5.5	34.0	-	50.3	-	68.2	-	17.9	-	
Vert.	10000.0	45.6	-	39.6	-2.9	34.7	-	47.6	-	68.2	-	20.6	-	
Vert.	11250.0	44.5	37.4	40.1	-2.4	33.9	-	48.2	41.1	73.9	53.9	25.7	12.8	
Vert.	11490.0	44.9	37.8	40.1	-2.3	33.9	2.6	48.7	44.2	73.9	53.9	25.2	9.7	
Vert.	12500.0	45.3	39.5	39.2	-2.0	33.5	-	49.0	43.2	73.9	53.9	24.9	10.7	
Vert.	17235.0	45.2	-	42.1	-0.9	33.1	-	53.4	-	68.2	-	14.8	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz 20log (3.6 m / 3.0 m) = 1.59 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab.
No.2
November 16, 2023
23 deg. C / 47 % RH
Tomoya Sone
Tx 11ac-20 5745 MHz

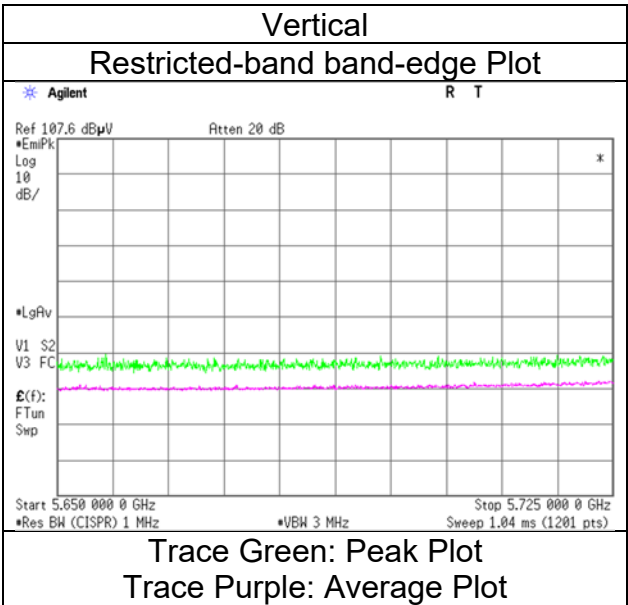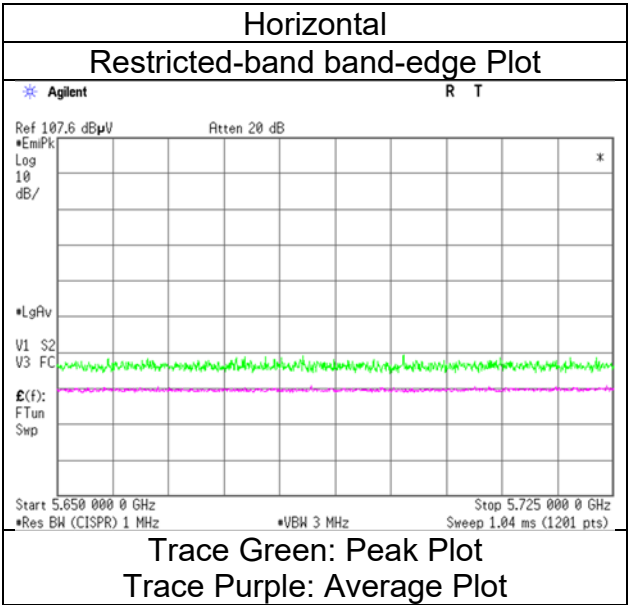

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.2	No.2	No.2
Date	November 16, 2023	November 19, 2023	November 16, 2023
Temperature / Humidity	23 deg. C / 47 % RH	20 deg. C / 40 % RH	21 deg. C / 40 % RH
Engineer	Tomoya Sone	Kiyoshiro Okazaki	Daiki Matsui
	(1 GHz to 10 GHz)	(10 GHz to 26.5 GHz)	(26.5 GHz to 40 GHz)
Mode	Tx 11ac-20 5785 MHz		

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	1580.0	49.0	42.6	25.3	3.5	35.5	-	42.2	35.8	73.9	53.9	31.7	18.1	
Hori.	2500.0	46.9	39.0	27.5	4.0	34.9	-	43.5	35.6	73.9	53.9	30.4	18.3	
Hori.	4739.9	43.6	37.1	31.5	5.0	34.1	-	45.9	39.4	73.9	53.9	28.1	14.5	
Hori.	5000.0	46.6	42.3	31.8	5.1	34.2	-	49.3	45.0	73.9	53.9	24.6	8.9	
Hori.	6319.9	45.0	-	33.3	5.5	34.0	-	49.8	-	68.2	-	18.4	-	
Hori.	10000.0	46.1	-	39.6	-2.9	34.7	-	48.1	-	68.2	-	20.1	-	
Hori.	11250.0	42.6	37.4	40.1	-2.4	33.9	-	46.3	41.1	73.9	53.9	27.7	12.8	
Hori.	11570.0	44.6	36.3	39.7	-2.3	33.9	2.6	48.2	42.5	73.9	53.9	25.7	11.4	
Hori.	12500.0	46.0	40.1	39.2	-2.0	33.5	-	49.7	43.8	73.9	53.9	24.2	10.1	
Hori.	17355.0	44.0	-	43.2	-0.9	33.0	-	53.3	-	68.2	-	14.9	-	Floor noise
Vert.	1580.0	49.1	42.4	25.3	3.5	35.5	-	42.4	35.7	73.9	53.9	31.5	18.2	
Vert.	2500.0	45.8	39.0	27.5	4.0	34.9	-	42.4	35.6	73.9	53.9	31.5	18.3	
Vert.	4739.9	44.1	37.8	31.5	5.0	34.1	-	46.4	40.1	73.9	53.9	27.5	13.8	
Vert.	5000.0	45.9	41.5	31.8	5.1	34.2	-	48.6	44.2	73.9	53.9	25.3	9.7	
Vert.	6319.9	45.2	-	33.3	5.5	34.0	-	50.1	-	68.2	-	18.1	-	
Vert.	10000.0	45.7	-	39.6	-2.9	34.7	-	47.6	-	68.2	-	20.6	-	
Vert.	11250.0	44.3	37.2	40.1	-2.4	33.9	-	48.0	40.8	73.9	53.9	25.9	13.1	
Vert.	11570.0	44.8	37.7	39.7	-2.3	33.9	2.6	48.3	43.8	73.9	53.9	25.6	10.1	
Vert.	12500.0	45.2	39.5	39.2	-2.0	33.5	-	48.9	43.2	73.9	53.9	25.0	10.7	
Vert.	17355.0	44.2	-	43.2	-0.9	33.0	-	53.5	-	68.2	-	14.7	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz 20log (3.6 m / 3.0 m) = 1.59 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.2	No.2	No.2
Date	November 16, 2023	November 19, 2023	November 16, 2023
Temperature / Humidity	23 deg. C / 47 % RH	20 deg. C / 40 % RH	21 deg. C / 40 % RH
Engineer	Tomoya Sone	Kiyoshiro Okazaki	Daiki Matsui
	(1 GHz to 10 GHz)	(10 GHz to 26.5 GHz)	(26.5 GHz to 40 GHz)
Mode	Tx 11ac-20 5825 MHz		

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	1580.0	49.1	42.7	25.3	3.5	35.5	-	42.4	36.0	73.9	53.9	31.5	17.9	
Hori.	2500.0	46.8	39.1	27.5	4.0	34.9	-	43.5	35.7	73.9	53.9	30.4	18.2	
Hori.	4739.9	43.7	37.2	31.5	5.0	34.1	-	46.0	39.5	73.9	53.9	27.9	14.4	
Hori.	5000.0	46.9	42.6	31.8	5.1	34.2	-	49.6	45.3	73.9	53.9	24.4	8.6	
Hori.	5850.0	48.9	-	32.3	5.4	34.0	-	52.6	-	122.2	-	69.6	-	
Hori.	5855.0	46.0	-	32.3	5.4	34.0	-	49.7	-	110.8	-	61.1	-	
Hori.	5875.0	42.1	-	32.3	5.4	34.0	-	45.9	-	105.2	-	59.4	-	
Hori.	5925.0	43.1	-	32.4	5.4	34.0	-	46.9	-	68.2	-	21.3	-	
Hori.	6319.9	45.1	-	33.3	5.5	34.0	-	50.0	-	68.2	-	18.3	-	
Hori.	10000.0	45.2	-	39.6	-2.9	34.7	-	47.2	-	68.2	-	21.0	-	
Hori.	11250.0	43.7	38.1	40.1	-2.4	33.9	-	47.4	41.8	73.9	53.9	26.5	12.1	
Hori.	11650.0	46.0	37.8	39.3	-2.2	33.9	2.6	49.2	43.5	73.9	53.9	24.7	10.4	
Hori.	12500.0	45.8	40.2	39.2	-2.0	33.5	-	49.5	43.9	73.9	53.9	24.5	10.0	
Hori.	17475.0	44.5	-	44.2	-0.8	32.9	-	55.0	-	68.2	-	13.3	-	Floor noise
Vert.	1580.0	49.3	42.4	25.3	3.5	35.5	-	42.6	35.7	73.9	53.9	31.3	18.2	
Vert.	2500.0	45.8	39.1	27.5	4.0	34.9	-	42.4	35.7	73.9	53.9	31.5	18.2	
Vert.	4739.9	44.4	38.0	31.5	5.0	34.1	-	46.7	40.3	73.9	53.9	27.3	13.6	
Vert.	5000.0	46.1	41.4	31.8	5.1	34.2	-	48.8	44.1	73.9	53.9	25.1	9.8	
Vert.	5850.0	55.1	-	32.3	5.4	34.0	-	58.8	-	122.2	-	63.4	-	
Vert.	5855.0	53.3	-	32.3	5.4	34.0	-	57.0	-	110.8	-	53.8	-	
Vert.	5875.0	49.0	-	32.3	5.4	34.0	-	52.7	-	105.2	-	52.5	-	
Vert.	5925.0	41.9	-	32.4	5.4	34.0	-	45.7	-	68.2	-	22.5	-	
Vert.	6319.9	45.5	-	33.3	5.5	34.0	-	50.3	-	68.2	-	17.9	-	
Vert.	10000.0	45.1	-	39.6	-2.9	34.7	-	47.1	-	68.2	-	21.1	-	
Vert.	11250.0	44.4	37.5	40.1	-2.4	33.9	-	48.1	41.2	73.9	53.9	25.8	12.8	
Vert.	11650.0	44.9	37.3	39.3	-2.2	33.9	2.6	48.0	43.1	73.9	53.9	25.9	10.8	
Vert.	12500.0	45.2	39.3	39.2	-2.0	33.5	-	48.9	42.9	73.9	53.9	25.0	11.0	
Vert.	17475.0	44.2	-	44.2	-0.8	32.9	-	54.7	-	68.2	-	13.5	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz 20log (3.6 m / 3.0 m) = 1.59 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab.
No.2
November 16, 2023
23 deg. C / 47 % RH
Tomoya Sone
Tx 11ac-20 5825 MHz

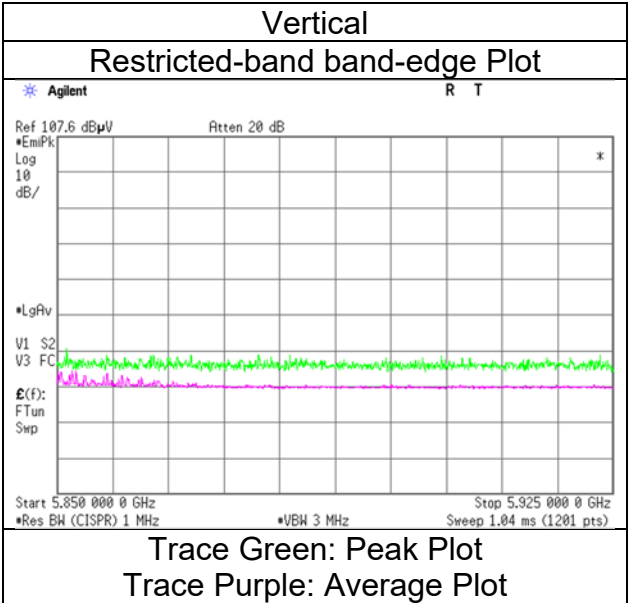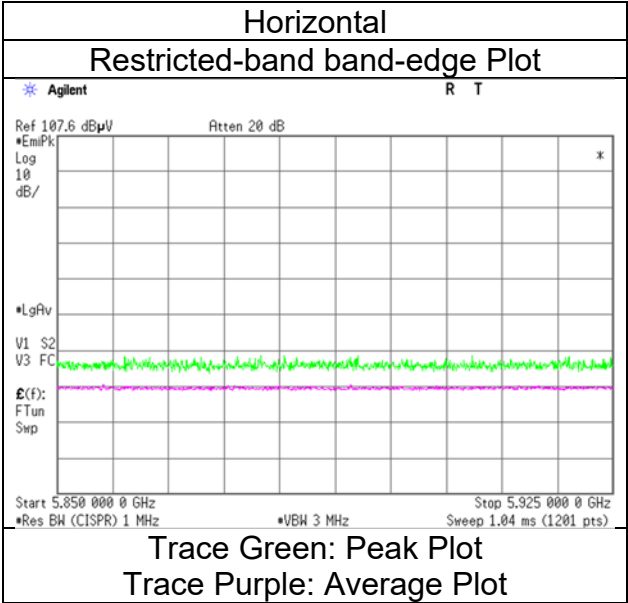

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.2	No.2	No.2
Date	November 16, 2023	November 19, 2023	November 16, 2023
Temperature / Humidity	23 deg. C / 46 % RH	20 deg. C / 40 % RH	21 deg. C / 40 % RH
Engineer	Junya Okuno	Kiyoshiro Okazaki	Daiki Matsui
	(1 GHz to 10 GHz)	(10 GHz to 26.5 GHz)	(26.5 GHz to 40 GHz)
Mode	Tx 11ac-40 5190 MHz		

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	1580.0	48.8	42.7	25.3	3.5	35.5	-	42.1	35.9	73.9	53.9	31.8	18.0	
Hori.	2500.0	46.6	39.4	27.5	4.0	34.9	-	43.2	36.0	73.9	53.9	30.7	17.9	
Hori.	4739.9	43.7	37.3	31.5	5.0	34.1	-	46.0	39.6	73.9	53.9	27.9	14.3	
Hori.	5000.0	46.7	42.6	31.8	5.1	34.2	-	49.4	45.3	73.9	53.9	24.5	8.6	
Hori.	5150.0	50.3	35.9	31.9	5.1	34.1	3.7	53.2	42.5	73.9	53.9	20.7	11.4	*1)
Hori.	6319.9	45.2	-	33.3	5.5	34.0	-	50.0	-	68.2	-	18.2	-	
Hori.	6920.0	44.1	-	35.0	5.7	33.9	-	50.9	-	68.2	-	17.3	-	
Hori.	10000.0	45.7	-	39.6	-2.9	34.7	-	47.6	-	68.2	-	20.6	-	
Hori.	10380.0	45.3	-	39.9	-2.8	34.5	-	47.9	-	68.2	-	20.3	-	
Hori.	11250.0	44.0	37.9	40.1	-2.4	33.9	-	47.7	41.6	73.9	53.9	26.2	12.3	
Hori.	12500.0	45.8	40.1	39.2	-2.0	33.5	-	49.5	43.8	73.9	53.9	24.5	10.1	
Hori.	15570.0	44.2	35.8	37.3	-1.2	33.4	-	46.8	38.4	73.9	53.9	27.1	15.5	Floor noise
Vert.	1580.0	49.5	42.5	25.3	3.5	35.5	-	42.8	35.8	73.9	53.9	31.1	18.1	
Vert.	2500.0	45.6	39.2	27.5	4.0	34.9	-	42.3	35.8	73.9	53.9	31.7	18.1	
Vert.	4739.9	44.1	38.0	31.5	5.0	34.1	-	46.4	40.3	73.9	53.9	27.5	13.6	
Vert.	5000.0	45.9	41.3	31.8	5.1	34.2	-	48.6	44.0	73.9	53.9	25.3	9.9	
Vert.	5150.0	57.3	41.1	31.9	5.1	34.1	3.7	60.2	47.6	73.9	53.9	13.7	6.3	*1)
Vert.	6319.9	45.4	-	33.3	5.5	34.0	-	50.3	-	68.2	-	17.9	-	
Vert.	6920.0	45.1	-	35.0	5.7	33.9	-	51.9	-	68.2	-	16.3	-	
Vert.	10000.0	45.4	-	39.6	-2.9	34.7	-	47.4	-	68.2	-	20.8	-	
Vert.	10380.0	45.3	-	39.9	-2.8	34.5	-	47.9	-	68.2	-	20.3	-	
Vert.	11250.0	44.2	37.4	40.1	-2.4	33.9	-	47.9	41.1	73.9	53.9	26.0	12.8	
Vert.	12500.0	45.2	39.5	39.2	-2.0	33.5	-	48.9	43.2	73.9	53.9	25.0	10.7	
Vert.	15570.0	44.0	35.8	37.3	-1.2	33.4	-	46.6	38.4	73.9	53.9	27.3	15.5	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)



Distance factor: 1 GHz - 10 GHz $20\log(3.6\text{ m} / 3.0\text{ m}) = 1.59\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission

Test place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer

Mode

Ise EMC Lab.
No.2
November 16, 2023
23 deg. C / 46 % RH
Junya Okuno
(1 GHz to 10 GHz)
Tx 11ac-40 5190 MHz

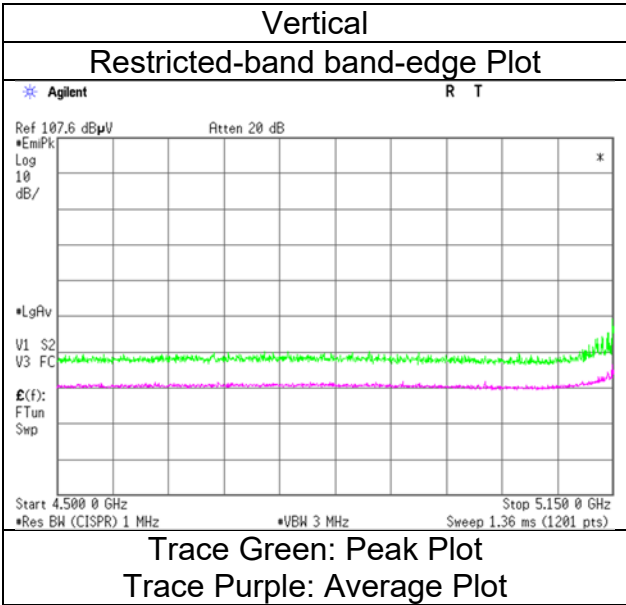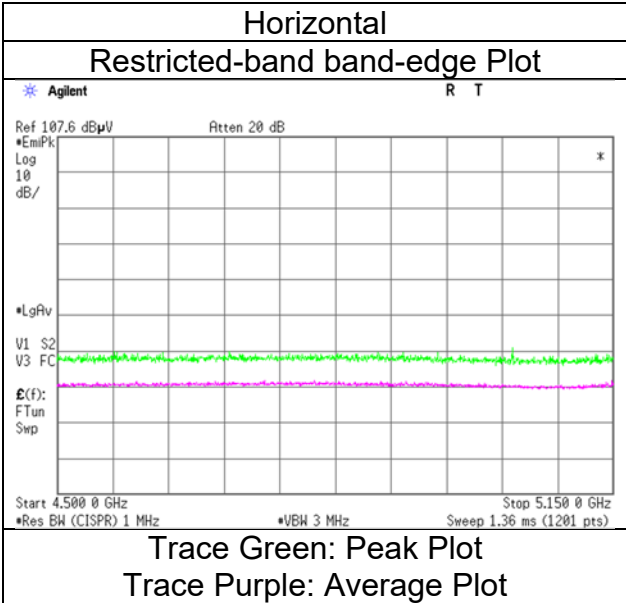

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.2	No.2	No.2
Date	November 16, 2023	November 19, 2023	November 16, 2023
Temperature / Humidity	23 deg. C / 46 % RH	20 deg. C / 40 % RH	21 deg. C / 40 % RH
Engineer	Junya Okuno	Kiyoshiro Okazaki	Daiki Matsui
	(1 GHz to 10 GHz)	(10 GHz to 26.5 GHz)	(26.5 GHz to 40 GHz)
Mode	Tx 11ac-40 5230 MHz		

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	1580.0	49.1	42.5	25.3	3.5	35.5	-	42.4	35.7	73.9	53.9	31.5	18.2	
Hori.	2500.0	47.1	39.4	27.5	4.0	34.9	-	43.7	36.0	73.9	53.9	30.2	17.9	
Hori.	4739.9	43.8	37.3	31.5	5.0	34.1	-	46.1	39.6	73.9	53.9	27.8	14.4	
Hori.	5000.0	46.7	42.4	31.8	5.1	34.2	-	49.4	45.1	73.9	53.9	24.6	8.8	
Hori.	5350.0	42.3	34.0	31.7	5.2	34.0	3.7	45.2	40.5	73.9	53.9	28.8	13.4	*1)
Hori.	6319.9	45.1	-	33.3	5.5	34.0	-	50.0	-	68.2	-	18.3	-	
Hori.	6973.3	45.5	-	35.3	5.7	33.9	-	52.7	-	68.2	-	15.5	-	
Hori.	10000.0	45.5	-	39.6	-2.9	34.7	-	47.5	-	68.2	-	20.7	-	
Hori.	10460.0	44.8	-	39.7	-2.7	34.4	-	47.4	-	68.2	-	20.8	-	
Hori.	11250.0	44.0	38.0	40.1	-2.4	33.9	-	47.7	41.7	73.9	53.9	26.2	12.3	
Hori.	12500.0	45.3	40.3	39.2	-2.0	33.5	-	49.0	44.0	73.9	53.9	25.0	9.9	
Hori.	15690.0	44.5	36.5	37.2	-1.2	33.5	-	47.0	38.9	73.9	53.9	26.9	15.0	Floor noise
Vert.	1580.0	49.3	42.4	25.3	3.5	35.5	-	42.5	35.7	73.9	53.9	31.4	18.3	
Vert.	2500.0	46.2	39.0	27.5	4.0	34.9	-	42.8	35.6	73.9	53.9	31.1	18.3	
Vert.	4739.9	44.6	37.8	31.5	5.0	34.1	-	46.9	40.1	73.9	53.9	27.0	13.8	
Vert.	5000.0	46.1	41.5	31.8	5.1	34.2	-	48.8	44.2	73.9	53.9	25.1	9.7	
Vert.	5350.0	44.4	34.3	31.7	5.2	34.0	3.7	47.3	40.8	73.9	53.9	26.6	13.1	*1)
Vert.	6319.9	45.3	-	33.3	5.5	34.0	-	50.1	-	68.2	-	18.1	-	
Vert.	6973.3	45.7	-	35.3	5.7	33.9	-	52.9	-	68.2	-	15.4	-	
Vert.	10000.0	45.4	-	39.6	-2.9	34.7	-	47.4	-	68.2	-	20.8	-	
Vert.	10460.0	44.7	-	39.7	-2.7	34.4	-	47.3	-	68.2	-	20.9	-	
Vert.	11250.0	44.1	37.3	40.1	-2.4	33.9	-	47.8	41.0	73.9	53.9	26.1	12.9	
Vert.	12500.0	45.4	39.7	39.2	-2.0	33.5	-	49.1	43.4	73.9	53.9	24.8	10.5	
Vert.	15690.0	44.6	36.5	37.2	-1.2	33.5	-	47.1	39.0	73.9	53.9	26.8	15.0	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)
Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor
*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).
*QP detector was used up to 1GHz.
*1) Not Out of Band emission(Leakage Power)



Distance factor: 1 GHz - 10 GHz $20\log(3.6\text{ m} / 3.0\text{ m}) = 1.59\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission

Test place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer

Mode

Ise EMC Lab.
No.2
November 16, 2023
23 deg. C / 46 % RH
Junya Okuno
(1 GHz to 10 GHz)
Tx 11ac-40 5230 MHz

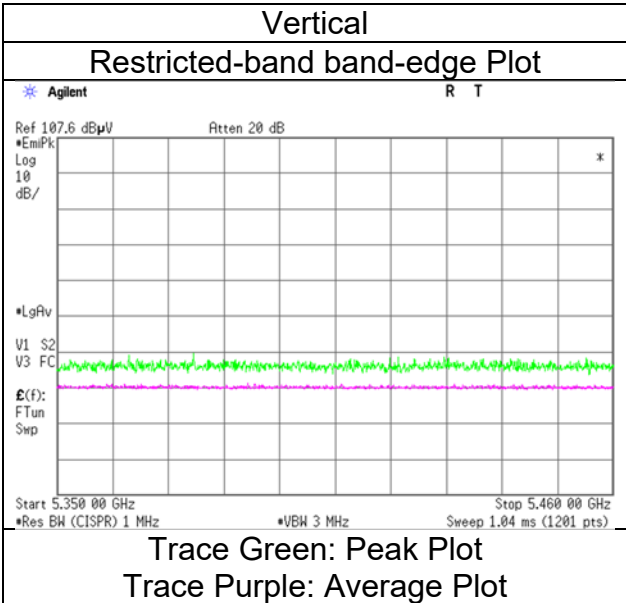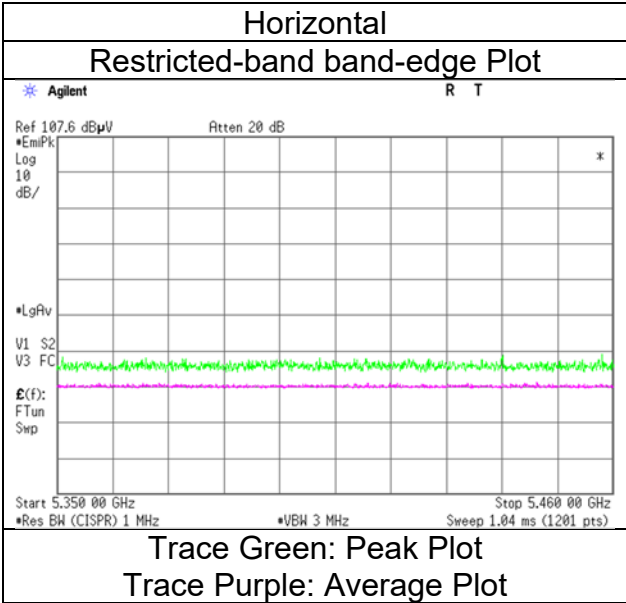

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.2	No.2	No.2
Date	November 16, 2023	November 19, 2023	November 16, 2023
Temperature / Humidity	23 deg. C / 46 % RH	20 deg. C / 40 % RH	21 deg. C / 40 % RH
Engineer	Junya Okuno	Kiyoshiro Okazaki	Daiki Matsui
Mode	(1 GHz to 10 GHz) Tx 11ac-40 5755 MHz	(10 GHz to 26.5 GHz)	(26.5 GHz to 40 GHz)

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	1580.0	49.0	42.9	25.3	3.5	35.5	-	42.2	36.1	73.9	53.9	31.7	17.8	
Hori.	2500.0	47.0	39.4	27.5	4.0	34.9	-	43.6	36.0	73.9	53.9	30.3	17.9	
Hori.	4739.9	44.0	37.2	31.5	5.0	34.1	-	46.3	39.5	73.9	53.9	27.7	14.4	
Hori.	5000.0	47.0	42.8	31.8	5.1	34.2	-	49.7	45.5	73.9	53.9	24.2	8.4	
Hori.	5650.0	41.7	-	31.8	5.3	33.9	-	44.9	-	68.2	-	23.3	-	
Hori.	5700.0	41.9	-	31.9	5.3	33.9	-	45.2	-	105.2	-	60.0	-	
Hori.	5720.0	43.1	-	32.0	5.3	33.9	-	46.4	-	110.8	-	64.4	-	
Hori.	5725.0	44.6	-	32.0	5.3	33.9	-	47.9	-	122.2	-	74.3	-	
Hori.	6319.9	45.2	-	33.3	5.5	34.0	-	50.1	-	68.2	-	18.1	-	
Hori.	10000.0	45.3	-	39.6	-2.9	34.7	-	47.3	-	68.2	-	20.9	-	
Hori.	11250.0	44.0	38.2	40.1	-2.4	33.9	-	47.7	41.9	73.9	53.9	26.2	12.0	
Hori.	11510.0	45.2	36.7	40.0	-2.3	33.9	3.7	49.0	44.1	73.9	53.9	25.0	9.8	
Hori.	12500.0	46.0	40.4	39.2	-2.0	33.5	-	49.7	44.1	73.9	53.9	24.2	9.8	
Hori.	17265.0	44.9	-	42.4	-0.9	33.0	-	53.3	-	68.2	-	14.9	-	Floor noise
Vert.	1580.0	49.7	42.3	25.3	3.5	35.5	-	42.9	35.6	73.9	53.9	31.0	18.3	
Vert.	2500.0	45.9	39.2	27.5	4.0	34.9	-	42.5	35.8	73.9	53.9	31.4	18.1	
Vert.	4739.9	44.3	38.0	31.5	5.0	34.1	-	46.6	40.3	73.9	53.9	27.3	13.6	
Vert.	5000.0	45.9	41.6	31.8	5.1	34.2	-	48.6	44.3	73.9	53.9	25.4	9.6	
Vert.	5650.0	44.6	-	31.8	5.3	33.9	-	47.8	-	68.2	-	20.4	-	
Vert.	5700.0	47.0	-	31.9	5.3	33.9	-	50.3	-	105.2	-	54.9	-	
Vert.	5720.0	56.7	-	32.0	5.3	33.9	-	60.1	-	110.8	-	50.7	-	
Vert.	5725.0	57.7	-	32.0	5.3	33.9	-	61.1	-	122.2	-	61.1	-	
Vert.	6319.9	45.5	-	33.3	5.5	34.0	-	50.4	-	68.2	-	17.9	-	
Vert.	10000.0	45.2	-	39.6	-2.9	34.7	-	47.1	-	68.2	-	21.1	-	
Vert.	11250.0	44.3	37.6	40.1	-2.4	33.9	-	48.0	41.2	73.9	53.9	25.9	12.7	
Vert.	11510.0	45.3	37.5	40.0	-2.3	33.9	3.7	49.1	45.0	73.9	53.9	24.9	8.9	
Vert.	12500.0	45.1	39.5	39.2	-2.0	33.5	-	48.8	43.2	73.9	53.9	25.1	10.7	
Vert.	17265.0	45.3	-	42.4	-0.9	33.0	-	53.7	-	68.2	-	14.5	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.



Distance factor: 1 GHz - 10 GHz $20\log(3.6\text{ m} / 3.0\text{ m}) = 1.59\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission

Test place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer

Mode

Ise EMC Lab.
No.2
November 16, 2023
23 deg. C / 46 % RH
Junya Okuno
(1 GHz to 10 GHz)
Tx 11ac-40 5755 MHz

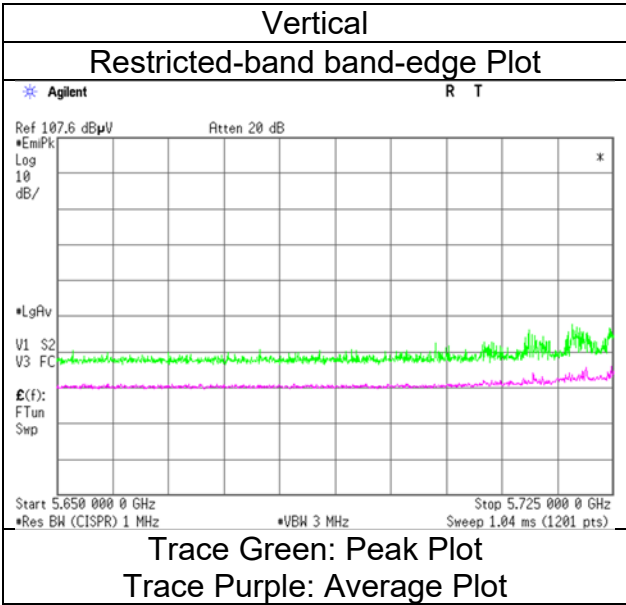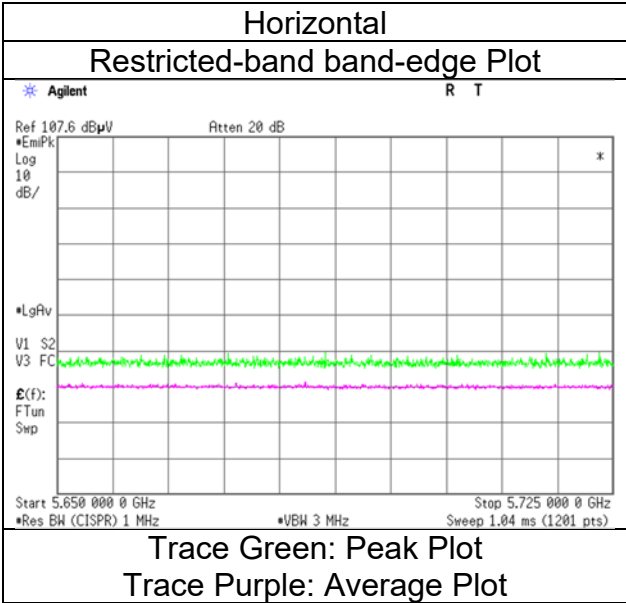

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.2	No.2	No.2
Date	November 16, 2023	November 19, 2023	November 16, 2023
Temperature / Humidity	23 deg. C / 46 % RH	20 deg. C / 40 % RH	21 deg. C / 40 % RH
Engineer	Junya Okuno	Kiyoshiro Okazaki	Daiki Matsui
	(1 GHz to 10 GHz)	(10 GHz to 26.5 GHz)	(26.5 GHz to 40 GHz)
Mode	Tx 11ac-40 5795 MHz		

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	1580.0	48.8	42.6	25.3	3.5	35.5	-	42.1	35.8	73.9	53.9	31.8	18.1	
Hori.	2500.0	46.8	39.2	27.5	4.0	34.9	-	43.4	35.8	73.9	53.9	30.5	18.1	
Hori.	4739.9	44.1	37.4	31.5	5.0	34.1	-	46.4	39.7	73.9	53.9	27.5	14.2	
Hori.	5000.0	46.7	42.5	31.8	5.1	34.2	-	49.4	45.2	73.9	53.9	24.5	8.7	
Hori.	5850.0	41.9	-	32.3	5.4	34.0	-	45.6	-	122.2	-	76.7	-	
Hori.	5855.0	41.7	-	32.3	5.4	34.0	-	45.4	-	110.8	-	65.4	-	
Hori.	5875.0	41.5	-	32.3	5.4	34.0	-	45.3	-	105.2	-	59.9	-	
Hori.	5925.0	41.4	-	32.4	5.4	34.0	-	45.2	-	68.2	-	23.0	-	
Hori.	6319.9	45.0	-	33.3	5.5	34.0	-	49.8	-	68.2	-	18.4	-	
Hori.	10000.0	45.6	-	39.6	-2.9	34.7	-	47.6	-	68.2	-	20.6	-	
Hori.	11250.0	43.7	38.1	40.1	-2.4	33.9	-	47.3	41.8	73.9	53.9	26.6	12.1	
Hori.	11590.0	44.5	36.0	39.6	-2.3	33.9	3.7	47.9	43.1	73.9	53.9	26.0	10.8	
Hori.	12500.0	45.7	40.4	39.2	-2.0	33.5	-	49.4	44.1	73.9	53.9	24.5	9.8	
Hori.	17385.0	44.6	-	43.6	-0.9	33.0	-	54.3	-	68.2	-	13.9	-	Floor noise
Vert.	1580.0	49.2	42.6	25.3	3.5	35.5	-	42.4	35.8	73.9	53.9	31.5	18.1	
Vert.	2500.0	46.0	39.3	27.5	4.0	34.9	-	42.6	35.9	73.9	53.9	31.3	18.0	
Vert.	4739.9	44.4	37.9	31.5	5.0	34.1	-	46.7	40.2	73.9	53.9	27.3	13.7	
Vert.	5000.0	46.2	41.3	31.8	5.1	34.2	-	48.9	44.0	73.9	53.9	25.0	9.9	
Vert.	5850.0	44.5	-	32.3	5.4	34.0	-	48.2	-	122.2	-	74.0	-	
Vert.	5855.0	44.1	-	32.3	5.4	34.0	-	47.7	-	110.8	-	63.1	-	
Vert.	5875.0	42.2	-	32.3	5.4	34.0	-	46.0	-	105.2	-	59.3	-	
Vert.	5925.0	41.7	-	32.4	5.4	34.0	-	45.5	-	68.2	-	22.7	-	
Vert.	6319.9	45.3	-	33.3	5.5	34.0	-	50.1	-	68.2	-	18.1	-	
Vert.	10000.0	45.4	-	39.6	-2.9	34.7	-	47.3	-	68.2	-	20.9	-	
Vert.	11250.0	44.4	37.5	40.1	-2.4	33.9	-	48.1	41.2	73.9	53.9	25.8	12.7	
Vert.	11590.0	45.5	37.4	39.6	-2.3	33.9	3.7	49.0	44.5	73.9	53.9	24.9	9.4	
Vert.	12500.0	45.4	39.6	39.2	-2.0	33.5	-	49.0	43.2	73.9	53.9	24.9	10.7	
Vert.	17385.0	44.8	-	43.6	-0.9	33.0	-	54.5	-	68.2	-	13.7	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz 20log (3.6 m / 3.0 m) = 1.59 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab.
No.2
November 16, 2023
23 deg. C / 46 % RH
Junya Okuno
(1 GHz to 10 GHz)
Tx 11ac-40 5795 MHz

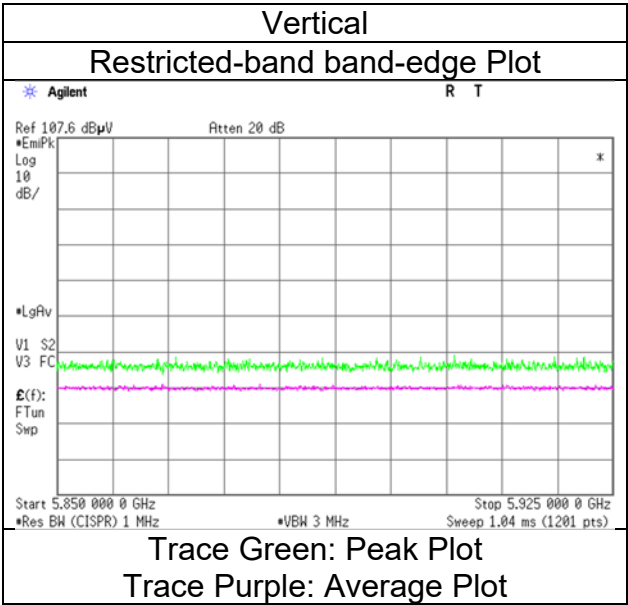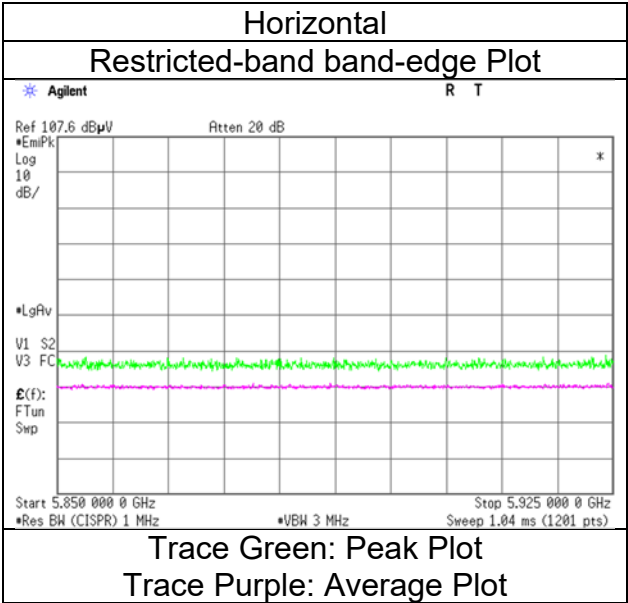

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.2	No.2	No.2
Date	November 16, 2023	November 19, 2023	November 16, 2023
Temperature / Humidity	23 deg. C / 46 % RH	20 deg. C / 40 % RH	21 deg. C / 40 % RH
Engineer	Junya Okuno	Kiyoshiro Okazaki	Daiki Matsui
	(1 GHz to 10 GHz)	(10 GHz to 26.5 GHz)	(26.5 GHz to 40 GHz)
Mode	Tx 11ac-80 5210 MHz		

Polarity	Frequency	Reading	Reading	Ant.	Loss	Gain	Duty	Result	Result	Limit	Limit	Margin	Margin	Remark
[Hori/Vert]	[MHz]	(QP / PK)	(AV)	Factor	[dB]	[dB]	Factor	(QP / PK)	(AV)	(QP / PK)	(AV)	(QP / PK)	(AV)	
		[dBuV]	[dBuV]	[dB/m]			[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	1580.0	49.0	42.6	25.3	3.5	35.5	-	42.3	35.9	73.9	53.9	31.7	18.1	
Hori.	2500.0	47.0	39.2	27.5	4.0	34.9	-	43.6	35.8	73.9	53.9	30.3	18.1	
Hori.	4739.9	44.0	37.0	31.5	5.0	34.1	-	46.3	39.3	73.9	53.9	27.6	14.6	
Hori.	5000.0	46.6	42.4	31.8	5.1	34.2	-	49.3	45.1	73.9	53.9	24.6	8.8	
Hori.	5150.0	47.5	34.8	31.9	5.1	34.1	5.0	50.4	42.7	73.9	53.9	23.5	11.2	*1)
Hori.	5350.0	42.6	33.9	31.7	5.2	34.0	5.0	45.5	41.8	73.9	53.9	28.5	12.1	*1)
Hori.	6319.9	45.0	-	33.3	5.5	34.0	-	49.8	-	68.2	-	18.4	-	
Hori.	6946.6	45.2	-	35.2	5.7	33.9	-	52.2	-	68.2	-	16.0	-	
Hori.	10000.0	46.0	-	39.6	-2.9	34.7	-	48.0	-	68.2	-	20.2	-	
Hori.	10420.0	44.6	-	39.8	-2.7	34.4	-	47.2	-	68.2	-	21.0	-	
Hori.	11250.0	44.2	37.8	40.1	-2.4	33.9	-	47.9	41.4	73.9	53.9	26.1	12.5	
Hori.	12500.0	45.6	40.2	39.2	-2.0	33.5	-	49.3	43.9	73.9	53.9	24.6	10.0	
Hori.	15630.0	45.3	36.2	37.2	-1.3	33.5	-	47.8	38.7	73.9	53.9	26.1	15.2	Floor noise
Vert.	1580.0	49.1	42.6	25.3	3.5	35.5	-	42.3	35.8	73.9	53.9	31.6	18.1	
Vert.	2500.0	45.9	39.3	27.5	4.0	34.9	-	42.5	35.9	73.9	53.9	31.4	18.0	
Vert.	4739.9	44.2	37.9	31.5	5.0	34.1	-	46.5	40.2	73.9	53.9	27.4	13.7	
Vert.	5000.0	45.9	41.4	31.8	5.1	34.2	-	48.6	44.1	73.9	53.9	25.3	9.8	
Vert.	5150.0	53.6	39.3	31.9	5.1	34.1	5.0	56.5	47.1	73.9	53.9	17.4	6.8	*1)
Vert.	5350.0	48.0	35.6	31.7	5.2	34.0	5.0	50.9	43.4	73.9	53.9	23.0	10.5	*1)
Vert.	6319.9	45.3	-	33.3	5.5	34.0	-	50.1	-	68.2	-	18.1	-	
Vert.	6946.6	44.8	-	35.2	5.7	33.9	-	51.8	-	68.2	-	16.4	-	
Vert.	10000.0	45.4	-	39.6	-2.9	34.7	-	47.3	-	68.2	-	20.9	-	
Vert.	10420.0	44.5	-	39.8	-2.7	34.4	-	47.1	-	68.2	-	21.1	-	
Vert.	11250.0	44.2	37.5	40.1	-2.4	33.9	-	47.9	41.1	73.9	53.9	26.0	12.8	
Vert.	12500.0	45.6	39.5	39.2	-2.0	33.5	-	49.3	43.2	73.9	53.9	24.6	10.7	
Vert.	15630.0	45.2	36.3	37.2	-1.3	33.5	-	47.7	38.8	73.9	53.9	26.2	15.2	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).


*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz 20log (3.6 m / 3.0 m) = 1.59 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	November 16, 2023
Temperature / Humidity	23 deg. C / 46 % RH
Engineer	Junya Okuno
	(1 GHz to 10 GHz)
Mode	Tx 11ac-80 5210 MHz

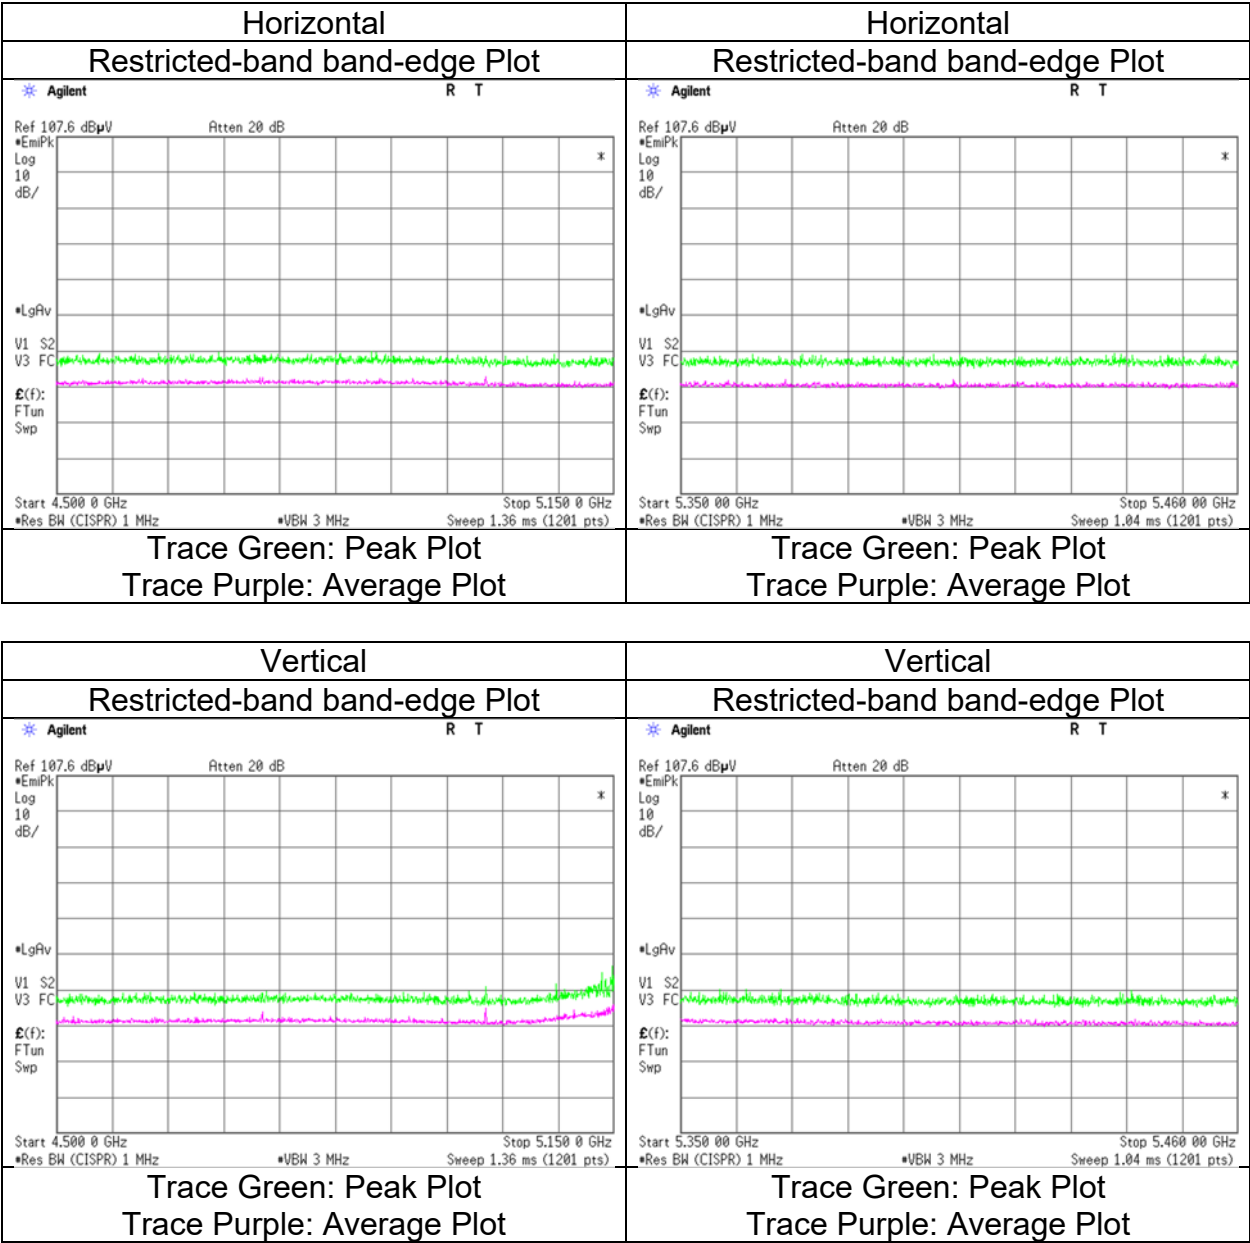

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.	No.2	No.2
Semi Anechoic Chamber	No.2	No.2	No.2
Date	November 19, 2023	November 19, 2023	November 16, 2023
Temperature / Humidity	20 deg. C / 40 % RH	20 deg. C / 40 % RH	21 deg. C / 40 % RH
Engineer	Junya Okuno	Kiyoshiro Okazaki	Daiki Matsui
	(1 GHz to 10 GHz)	(10 GHz to 26.5 GHz)	(26.5 GHz to 40 GHz)
Mode	Tx 11ac-80 5775 MHz		

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]		[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	1580.0	49.0	42.4	25.3	3.5	35.5	-	42.2	35.7	73.9	53.9	31.7	18.2	
Hori.	2500.0	47.1	39.3	27.5	4.0	34.9	-	43.7	35.9	73.9	53.9	30.2	18.0	
Hori.	4739.9	43.8	37.5	31.5	5.0	34.1	-	46.1	39.8	73.9	53.9	27.8	14.1	
Hori.	5000.0	46.8	42.4	31.8	5.1	34.2	-	49.5	45.1	73.9	53.9	24.4	8.8	
Hori.	5650.0	42.1	-	31.8	5.3	33.9	-	45.3	-	68.2	-	22.9	-	
Hori.	5700.0	43.3	-	31.9	5.3	33.9	-	46.6	-	105.2	-	58.6	-	
Hori.	5720.0	47.8	-	32.0	5.3	33.9	-	51.1	-	110.8	-	59.7	-	
Hori.	5725.0	50.3	-	32.0	5.3	33.9	-	53.7	-	122.2	-	68.5	-	
Hori.	5850.0	43.8	-	32.3	5.4	34.0	-	47.5	-	122.2	-	74.7	-	
Hori.	5855.0	43.1	-	32.3	5.4	34.0	-	46.8	-	110.8	-	64.0	-	
Hori.	5875.0	42.9	-	32.3	5.4	34.0	-	46.6	-	105.2	-	58.6	-	
Hori.	5925.0	42.1	-	32.4	5.4	34.0	-	45.9	-	68.2	-	22.3	-	
Hori.	6319.9	45.2	-	33.3	5.5	34.0	-	50.1	-	68.2	-	18.2	-	
Hori.	10000.0	45.3	-	39.6	-2.9	34.7	-	47.3	-	68.2	-	20.9	-	
Hori.	11250.0	43.8	38.1	40.1	-2.4	33.9	-	47.5	41.7	73.9	53.9	26.4	12.2	
Hori.	11550.0	44.5	36.2	39.8	-2.3	33.9	5.0	48.1	44.8	73.9	53.9	25.8	9.1	
Hori.	12500.0	45.6	40.4	39.2	-2.0	33.5	-	49.2	44.0	73.9	53.9	24.7	9.9	
Hori.	17325.0	44.3	-	42.9	-0.9	33.0	-	53.3	-	68.2	-	14.9	-	Floor noise
Vert.	1580.0	49.3	42.6	25.3	3.5	35.5	-	42.5	35.9	73.9	53.9	31.4	18.1	
Vert.	2500.0	46.0	39.1	27.5	4.0	34.9	-	42.6	35.7	73.9	53.9	31.3	18.2	
Vert.	4739.9	45.6	37.8	31.5	5.0	34.1	-	47.9	40.1	73.9	53.9	26.1	13.8	
Vert.	5000.0	45.8	41.4	31.8	5.1	34.2	-	48.5	44.1	73.9	53.9	25.4	9.8	
Vert.	5650.0	47.3	-	31.8	5.3	33.9	-	50.5	-	68.2	-	17.7	-	
Vert.	5700.0	47.9	-	31.9	5.3	33.9	-	51.2	-	105.2	-	54.0	-	
Vert.	5720.0	52.6	-	32.0	5.3	33.9	-	55.9	-	110.8	-	54.9	-	
Vert.	5725.0	54.9	-	32.0	5.3	33.9	-	58.2	-	122.2	-	64.0	-	
Vert.	5850.0	47.9	-	32.3	5.4	34.0	-	51.6	-	122.2	-	70.6	-	
Vert.	5855.0	46.6	-	32.3	5.4	34.0	-	50.3	-	110.8	-	60.6	-	
Vert.	5875.0	44.2	-	32.3	5.4	34.0	-	47.9	-	105.2	-	57.3	-	
Vert.	5925.0	42.5	-	32.4	5.4	34.0	-	46.3	-	68.2	-	22.0	-	
Vert.	6319.9	45.3	-	33.3	5.5	34.0	-	50.2	-	68.2	-	18.0	-	
Vert.	10000.0	45.1	-	39.6	-2.9	34.7	-	47.1	-	68.2	-	21.1	-	
Vert.	11250.0	44.6	37.5	40.1	-2.4	33.9	-	48.3	41.1	73.9	53.9	25.6	12.8	
Vert.	11550.0	44.5	36.7	39.8	-2.3	33.9	5.0	48.1	45.3	73.9	53.9	25.8	8.6	
Vert.	12500.0	45.3	39.5	39.2	-2.0	33.5	-	49.0	43.1	73.9	53.9	24.9	10.8	
Vert.	17325.0	44.3	-	42.9	-0.9	33.0	-	53.3	-	68.2	-	14.9	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor


*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz $20\log(3.6\text{ m} / 3.0\text{ m}) = 1.59\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	November 16, 2023
Temperature / Humidity	23 deg. C / 46 % RH
Engineer	Junya Okuno
	(1 GHz to 10 GHz)
Mode	Tx 11ac-80 5775 MHz

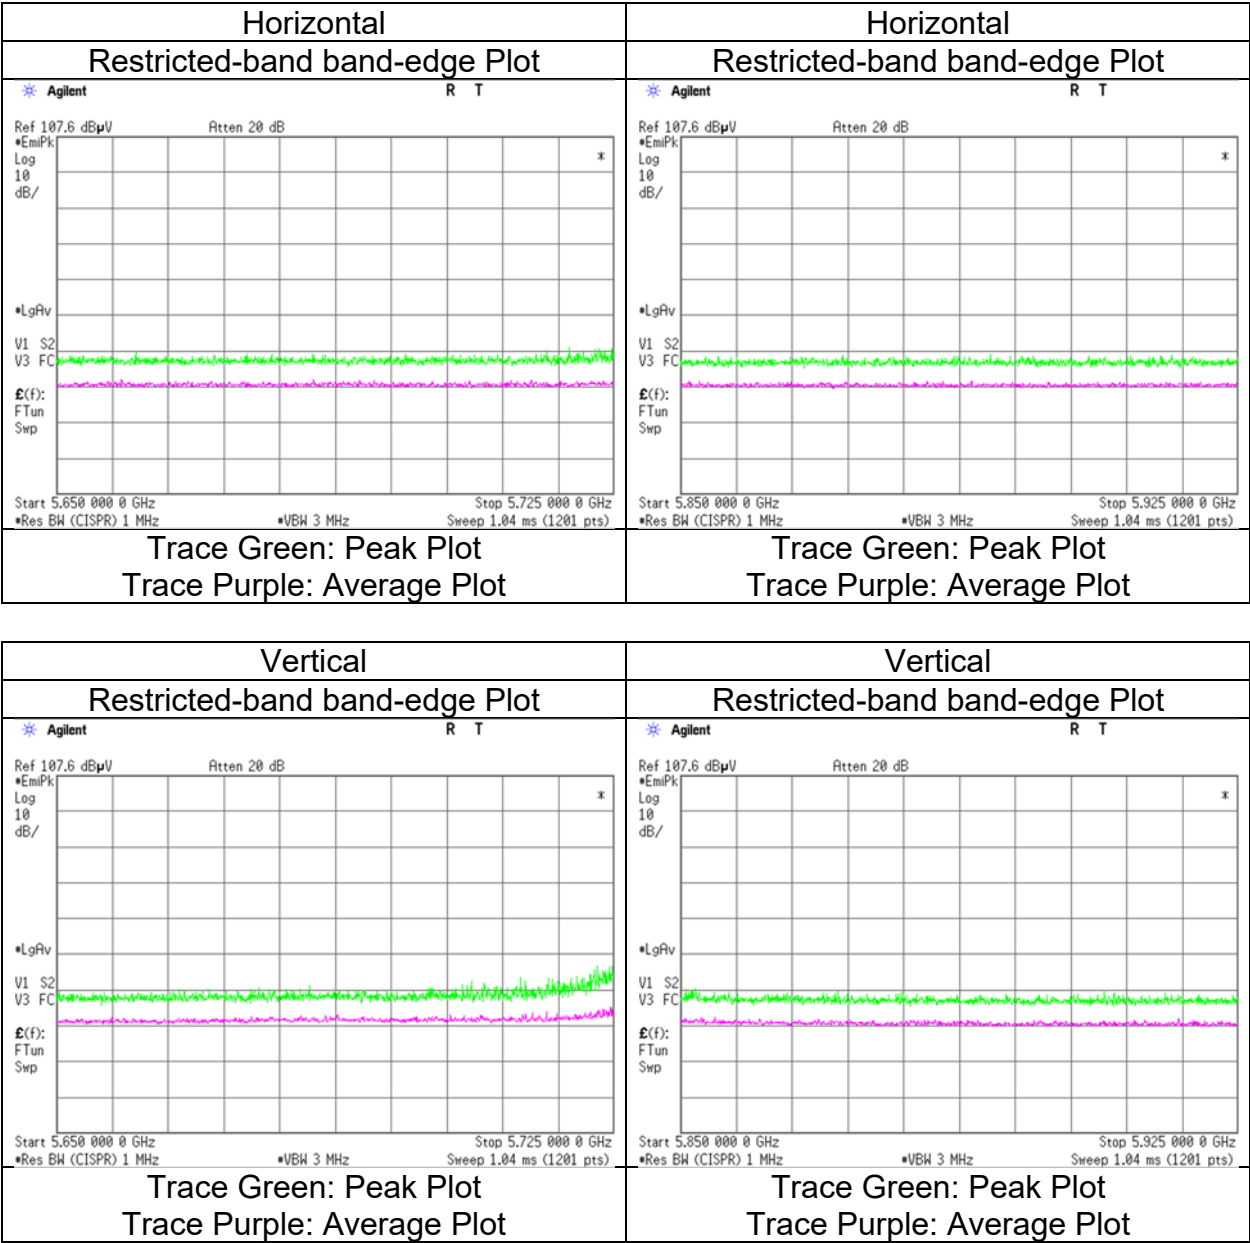

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.	No.2
Semi Anechoic Chamber	No.2	No.2
Date	November 29, 2023	November 29, 2023
Temperature / Humidity	23 deg. C / 44 % RH	22 deg. C / 42 % RH
Engineer	Shousei Hamaguchi	Daiki Matsui
	(1 GHz to 18 GHz)	(18 GHz to 40 GHz, Below 1 GHz)
Mode	Tx 11a 5240 MHz + BT DH5 Hopping ON	


Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	68.8	23.2	-	6.4	7.1	28.5	-	8.2	-	40.0	-	31.8	-	
Hori.	85.8	23.2	-	7.7	7.2	28.5	-	9.7	-	40.0	-	30.3	-	
Hori.	96.0	22.4	-	9.5	7.3	28.4	-	10.8	-	43.5	-	32.7	-	
Hori.	108.0	24.1	-	11.4	7.4	28.4	-	14.5	-	43.5	-	29.0	-	
Hori.	137.6	22.5	-	14.2	7.7	28.3	-	16.1	-	43.5	-	27.4	-	
Hori.	270.0	26.4	-	13.2	8.5	27.8	-	20.4	-	46.0	-	25.6	-	
Hori.	1580.0	48.6	42.1	25.3	4.0	35.5	-	42.4	35.9	73.9	53.9	31.6	18.0	
Hori.	2500.0	44.1	37.8	27.5	4.7	34.9	-	41.4	35.1	73.9	53.9	32.5	18.8	
Hori.	2700.0	47.4	38.1	28.1	4.8	34.8	-	45.5	36.1	73.9	53.9	28.5	17.8	
Hori.	4739.9	44.2	37.3	31.5	6.7	34.1	-	48.2	41.4	73.9	53.9	25.7	12.5	
Hori.	5000.0	45.7	39.9	31.8	6.8	34.2	-	50.1	44.3	73.9	53.9	23.8	9.6	
Hori.	5150.0	42.2	33.1	31.9	6.8	34.1	2.2	46.8	39.9	73.9	53.9	27.1	14.0	*1)
Hori.	5350.0	43.6	32.9	31.7	7.5	35.6	2.2	47.2	38.7	73.9	53.9	26.7	15.2	*1)
Hori.	6319.9	43.6	37.0	33.3	7.3	34.0	-	50.3	43.7	73.9	53.9	23.7	10.2	
Hori.	10000.0	44.0	-	39.6	-2.9	34.7	-	46.0	-	73.9	-	27.9	-	
Hori.	10480.0	35.6	-	39.7	-2.7	34.4	-	38.3	-	73.9	-	35.6	-	
Hori.	11250.0	45.3	37.7	40.1	-2.4	33.9	-	49.0	41.4	73.9	53.9	24.9	12.5	
Hori.	12500.0	46.2	41.0	39.2	-2.0	33.5	-	49.9	44.6	73.9	53.9	24.0	9.3	
Hori.	15720.0	44.9	37.0	37.2	-1.2	33.5	-	47.3	39.5	73.9	53.9	26.6	14.5	Floor noise
Vert.	61.4	26.7	-	7.5	7.0	28.5	-	12.6	-	40.0	-	27.4	-	
Vert.	86.0	25.2	-	7.7	7.2	28.5	-	11.7	-	40.0	-	28.3	-	
Vert.	98.4	28.4	-	9.9	7.4	28.4	-	17.2	-	43.5	-	26.3	-	
Vert.	108.0	28.3	-	11.4	7.4	28.4	-	18.7	-	43.5	-	24.8	-	
Vert.	110.0	25.6	-	11.6	7.5	28.4	-	16.3	-	43.5	-	27.3	-	
Vert.	270.0	26.6	-	13.2	8.5	27.8	-	20.6	-	46.0	-	25.4	-	
Vert.	1580.0	43.3	34.9	25.3	4.0	35.5	-	37.0	28.6	73.9	53.9	36.9	25.3	
Vert.	2500.0	45.5	38.9	27.5	4.7	34.9	-	42.8	36.2	73.9	53.9	31.2	17.7	
Vert.	2700.0	50.2	41.6	28.1	4.8	34.8	-	48.3	39.7	73.9	53.9	25.6	14.2	
Vert.	4739.9	45.9	38.5	31.5	6.7	34.1	-	50.0	42.6	73.9	53.9	24.0	11.3	
Vert.	5000.0	46.5	41.3	31.8	6.8	34.2	-	51.0	45.7	73.9	53.9	23.0	8.2	
Vert.	5150.0	46.1	34.7	31.9	6.8	34.1	2.2	50.7	41.5	73.9	53.9	23.2	12.4	*1)
Vert.	5350.0	42.8	34.3	31.7	7.5	35.6	2.2	46.4	40.1	73.9	53.9	27.5	13.8	*1)
Vert.	6319.9	45.3	39.8	33.3	7.3	34.0	-	52.0	46.5	73.9	53.9	22.0	7.4	
Vert.	10000.0	41.5	-	39.6	-2.9	34.7	-	43.5	-	73.9	-	30.4	-	
Vert.	10480.0	36.5	-	39.7	-2.7	34.4	-	39.1	-	73.9	-	34.8	-	
Vert.	11250.0	45.3	38.1	40.1	-2.4	33.9	-	48.9	41.8	73.9	53.9	25.0	12.2	
Vert.	12500.0	45.7	40.0	39.2	-2.0	33.5	-	49.4	43.7	73.9	53.9	24.5	10.2	
Vert.	15720.0	44.9	37.0	37.2	-1.2	33.5	-	47.3	39.5	73.9	53.9	26.6	14.5	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)
Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor
*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).
*QP detector was used up to 1GHz.
*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz 20log (3.6 m / 3.0 m) = 1.59 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission


Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	November 29, 2023
Temperature / Humidity	23 deg. C / 44 % RH
Engineer	Shousei Hamaguchi
Mode	Tx 11a 5240 MHz + BT DH5 Hopping ON

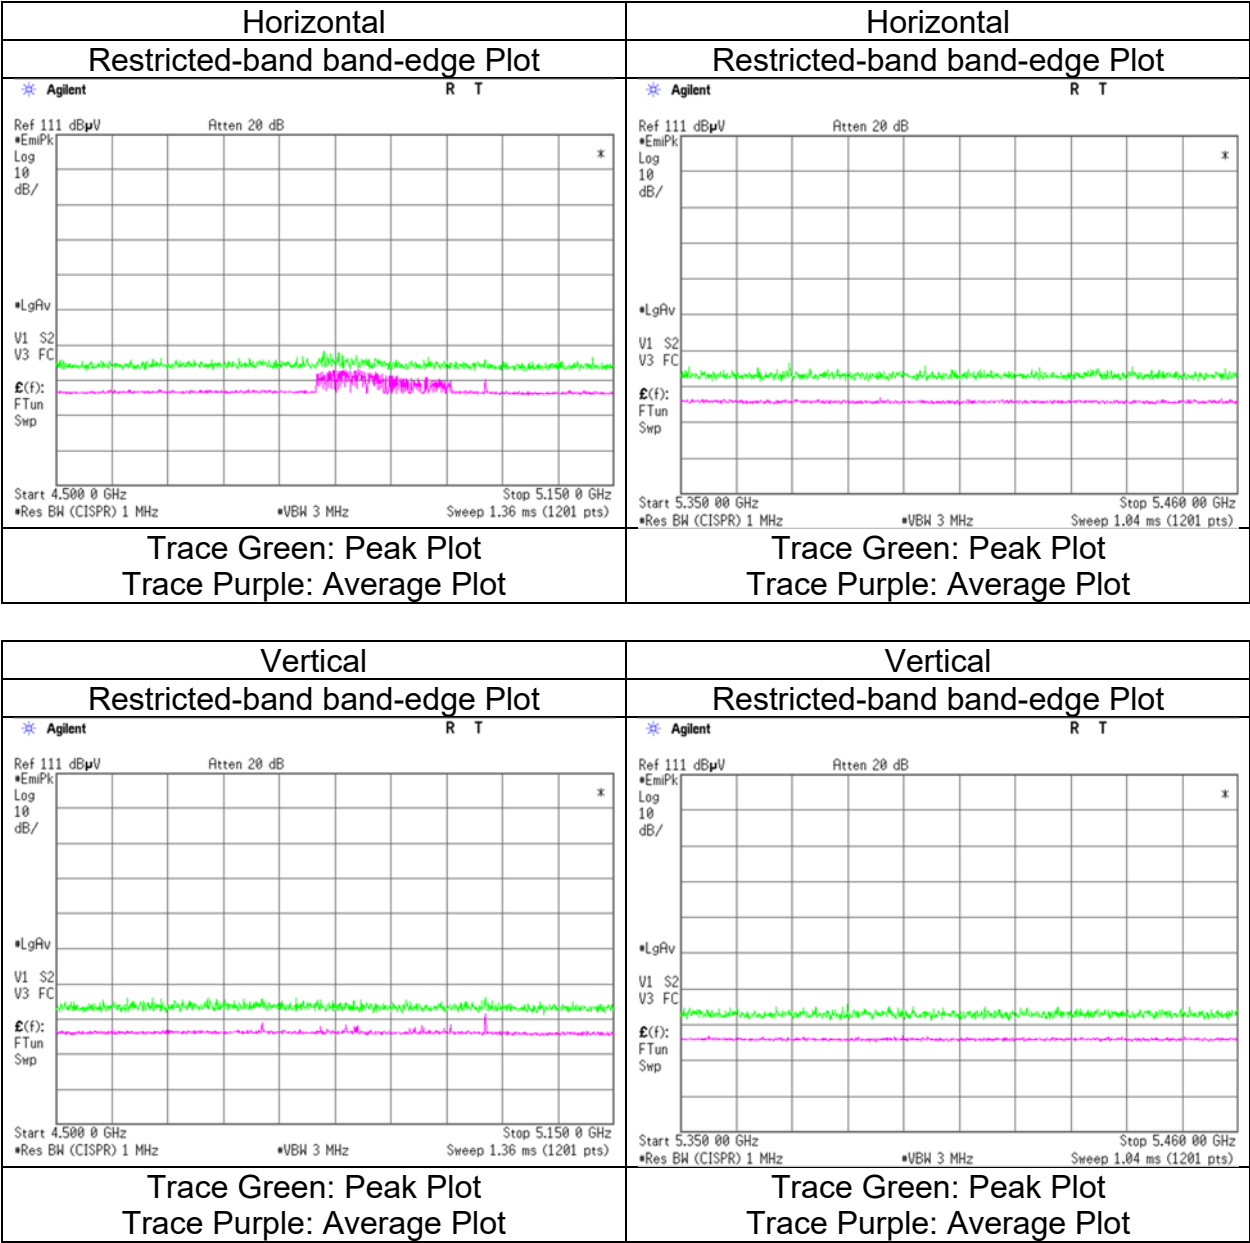

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission
(Plot data, Worst case mode for Maximum Conducted Output Power)

Test place	Ise EMC Lab.			
Semi Anechoic Chamber	No.2	No.2	No.2	No.2
Date	November 15, 2023	November 19, 2023	November 19, 2023	November 16, 2023
Temperature / Humidity	22 deg. C / 41 % RH	20 deg. C / 40 % RH	20 deg. C / 40 % RH	21 deg. C / 40 % RH
Engineer	Tomoya Sone (1 GHz to 10 GHz)	Junya Okuno (10 GHz to 18 GHz)	Kiyoshiro Okazaki (18 GHz to 26.5 GHz)	Daiki Matsui (26.5 GHz to 40 GHz, Below 1 GHz)
Mode	Tx 11a 5180 MHz			

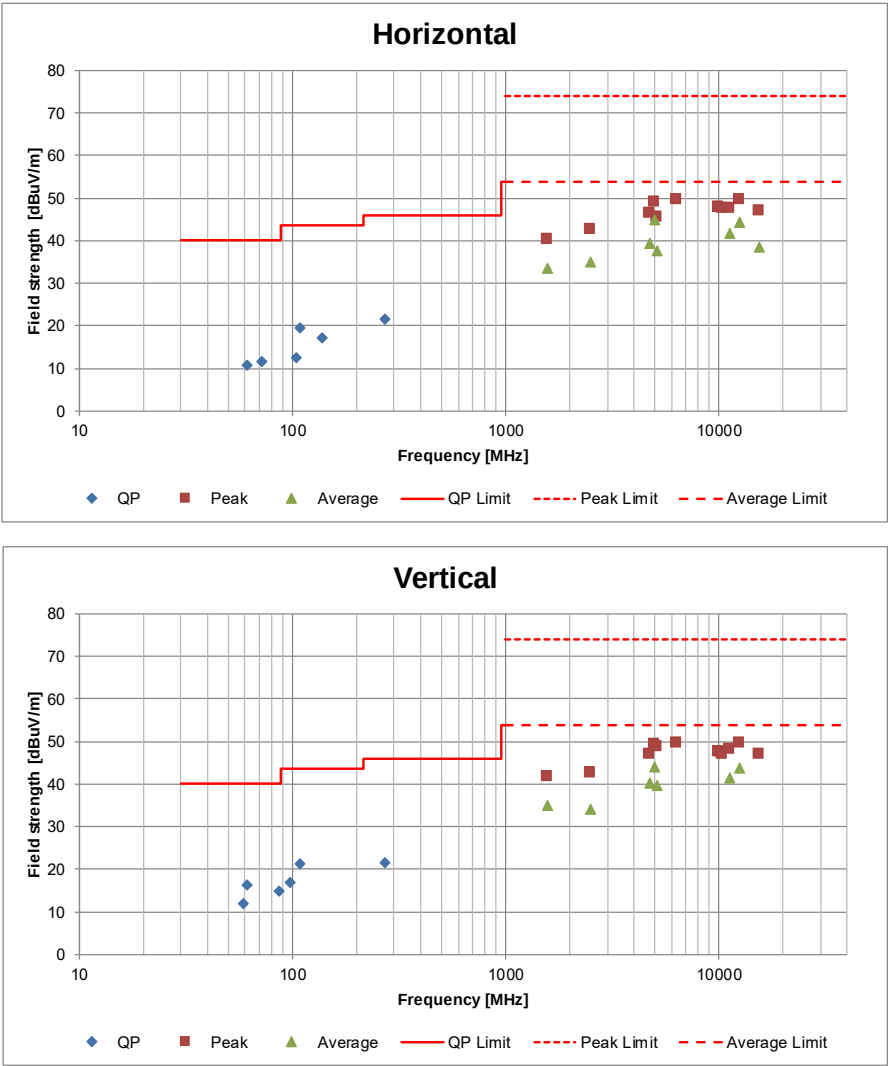

*These plots data contains sufficient number to show the trend of characteristic features for EUT.

APPENDIX 2: Test Instruments

Test Equipment

Test Item	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	141265	Logperiodic Antenna (200-1000MHz)	Schwarzbeck Mess-Elektronik OHG	VUSLP9111B	9111B-190	07/11/2023	12
RE	141279	Microwave Cable	Junkosha	MMX221-00500DMSDMS	1502S303	03/08/2023	12
RE	141296	High Pass Filter 3.5-18.0GHz	UL Japan	HPF SELECTOR	002	09/01/2023	12
RE	141317	Coaxial Cable	UL Japan	-	-	09/12/2023	12
RE	141325	Microwave Cable	Suhner	SUCOFLEX101	2873(1m) / 2876(5m)	03/07/2023	12
RE	141406	High Pass Filter 7-20GHz	TOKIMEC	TF37NCCA	7001	09/01/2023	12
RE	141427	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	VHA9103B+BBA9106	08031	07/11/2023	12
RE	141503	Horn Antenna 18-26.5GHz	EMCO	3160-09	1265	06/23/2023	12
RE	141512	Horn Antenna 1-18GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	254	10/17/2023	12
RE	141513	Horn Antenna 15-40GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9170	BBHA9170306	07/19/2023	12
RE	141542	Digital Tester	Fluke Corporation	FLUKE 26-3	78030611	08/01/2023	12
RE	141579	Pre Amplifier	Keysight Technologies Inc	8449B	3008A02142	02/14/2023	12
RE	141582	Pre Amplifier	SONOMA INSTRUMENT	310	260834	02/07/2023	12
RE	141594	Pre Amplifier	Keysight Technologies Inc	8447D	2944A10150	02/02/2023	12
RE	141884	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY44020357	03/13/2023	12
RE	141899	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY46180655	02/20/2023	12
RE	142004	AC2_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-06902	05/30/2022	24
RE	142006	AC2_Semi Anechoic Chamber(SVSWR)	TDK	Semi Anechoic Chamber 3m	DA-06902	10/20/2023	12
RE	142228	Measure, Tape, Steel	KOMELON	KMC-36	-	-	-
RE	160324	Coaxial Cable	Huber+Suhner	SUCOFLEX 102A	MY009/2A	10/05/2023	12
RE	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
RE	192300	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	0013	12/17/2022	12
RE	213780	EMI Test Receiver	Rohde & Schwarz	ESW8	103079	12/07/2022	12
RE	220646	Attenuator	Huber+Suhner	6806_N-50-1	-	03/17/2023	12
RE	237927	Broadband Amplifier	ERAVANT	SBB-0115033218-2F2F-E3	27554-01	07/10/2023	12
RE	240023	Microwave Cable	Huber+Suhner	SF126E/11PC35/11PC35/1000MM,5000MM	537060/126E / 537075/126E	09/08/2023	12

*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item:

RE: Radiated Emission