

# **FCC Test Report**

Report No.: AGC01284220402FE10

FCC ID : BB019MINI2

**PRODUCT DESIGNATION**: CB Radio

**BRAND NAME** : COBRA

**MODEL NAME** : 19MINIAMFM

**APPLICANT**: Cobra Electronics Corporation

**DATE OF ISSUE** : May 25, 2022

**STANDARD(S)** : FCC Part 95 Rules

**REPORT VERSION**: V 1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd







Page 2 of 46

#### REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	May 25, 2022	Valid	Initial Release





# **TABLE OF CONTENTS**

1. GENERAL INFORMATION	5
2. PRODUCT INFORMATION	6
2.1 PRODUCT TECHNICAL DESCRIPTION	6
2.2 TEST FREQUENCY LIST	7
2.3 RELATED SUBMITTAL(S) / GRANT (S)	8
2.4 TEST METHODOLOGY	8
2.5 CALCULATION OF EMISSION INDICATORS	8
2.6 STATEMENT - COMPLIANCE TO §95.977	9
2.7 SPECIAL ACCESSORIES	9
2.8 EQUIPMENT MODIFICATIONS	9
3. TEST ENVIRONMENT	10
3.1 ADDRESS OF THE TEST LABORATORY	10
3.2 TEST FACILITY	10
3.3 ENVIRONMENTAL CONDITIONS	11
3.4 MEASUREMENT UNCERTAINTY	11
3.5 LIST OF EQUIPMENTS USED	12
4.SYSTEM TEST CONFIGURATION	13
4.1 EUT CONFIGURATION	13
4.2 EUT EXERCISE	13
4.3 CONFIGURATION OF TESTED SYSTEM	13
4.4 EQUIPMENT USED IN TESTED SYSTEM	13
4.5 SUMMARY OF TEST RESULTS	14
5. DESCRIPTION OF TEST MODES	15
6.FREQUENCY STABILITY	16
6.1 PROVISIONS APPLICABLE	16
6.2 MEASUREMENT PROCEDURE	16
6.3 MEASUREMENT SETUP	16
6.4 MEASUREMENT RESULTS	17
7. EMISSION BANDWIDTH	18
7.1 PROVISIONS APPLICABLE	18
7.2 MEASUREMENT PROCEDURE	18
7.3 MEASUREMENT SETUP	18
7.4 MEASUREMENT RESULTS	19
8. RATIATED SPURIOUS EMISSION	21
8.1 PROVISIONS APPLICABLE	21



# Report No.: AGC01284220402FE10 Page 4 of 46

8.2 MEASUREMENT PROCEDURE	21
8.3 MEASUREMENT SETUP	22
8.4 MEASUREMENT RESULTS	23
8.5 EMISSION MASK PLOT	30
9. SPURIOUS EMISSION ON ANTENNA PORT	32
9.1 PROVISIONS APPLICABLE	32
9.2 MEASUREMENT METHOD	32
9.3 MEASUREMENT SETUP	32
9.4 MEASUREMENT RESULTS	33
10. MAXIMUMN TRANSMITTER POWER	37
10.1 PROVISIONS APPLICABLE	37
10.2 MEASUREMENT METHOD	37
10.3 MEASUREMENT SETUP	37
10.4 MEASUREMENT RESULTS	38
11.MODULATION CHARACTERISTICS	40
11.1 PROVISIONS APPLICABLE	40
11.2 MEASUREMENT METHOD_(AM)	40
11.3 MEASUREMENT METHOD_(FM)	40
11.4 MEASUREMENT SETUP	41
11.5 MEASUREMENT RESULTS	42
APPENDIX I: PHOTOGRAPHS OF TEST SETUP	46
APPENDIX II: PHOTOGRAPHS OF TEST EUT	46



Page 5 of 46

# 1. GENERAL INFORMATION

Applicant	Cobra Electronics Corporation
Address	6500 West Cortland Street Chicago, IL 60707-4013 United States
Manufacturer	Cobra Electronics Corporation
Address	6500 West Cortland Street Chicago, IL 60707-4013 United States
Factory	Cobra Electronics Corporation
Address	6500 West Cortland Street Chicago, IL 60707-4013 United States
Product Designation	CB Radio
Brand Name	COBRA
Test Model	19MINIAMFM
Deviation from Standard	No any deviation from the test method
Date of Receipt	Apr. 22, 2022
Date of Test	Apr. 22, 2022~May 25, 2022
Test Result	Pass

#### **WE HEREBY CERTIFY THAT:**

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI/TIA-382-A-1998. The sample tested as described in this report is in compliance with the FCC Rules Part 95. The test results of this report relate only to the tested sample identified in this report.

Prepared By	Bibo Zhang			
	Bibo Zhang (Project Engineer)	May 25, 2022		
Reviewed By	Calin Lin			
	Calvin Liu (Reviewer)	May 25, 2022		
Approved By	Max Zhang			
•	Max Zhang Authorized Officer	May 25, 2022		



Page 6 of 46

# 2. PRODUCT INFORMATION

# 2.1 PRODUCT TECHNICAL DESCRIPTION

Hardware Version	V1.0		
Software Version	V1.02		
Power Supply	DC 13.8V		
Communication Type	Voice / Tone only		
Operation Frequency Range	26.965MHz-27.405MHz		
Modulation Type	AM/FM		
Channel Separation	10 KHz		
Emission Designator	AM: 8K00A3E FM: 8K00F3E		
Number of Channels:	40 Channels		
Rated Output Power	4W (It was fixed by the manufacturer, any individual can't arbitrarily change it.)		
Maximum Transmitter Power	AM: 35.92dBm FM:35.50dBm		
Antenna Designation	Detachable		
Antenna Type	External antenna		
Antenna Gain	0dBi (Typical), 5dBi (Max)		
Frequency Tolerance	AM:1.087ppm FM:1.085ppm		



Page 7 of 46

#### 2.2 TEST FREQUENCY LIST

According to ANSI C63.26 section 5.1.2.1:

Measurements of transmitters shall be performed and, if required, reported for each frequency band in which the EUT can be operated with the device transmitting at the number of frequencies in each band specified in Table 2.

Frequency range Over which EUT operates	Number of Frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

	Operation Frequence	cy Each of Channel		
	CBRS	CBRS		
Channel	Frequency	Channel	Frequency	
1	26.965 MHz	21	27.215 MHz	
2	26.975 MHz	22	27.225 MHz	
3	26.985 MHz	23	27.255 MHz	
4	27.005 MHz	24	27.235 MHz	
5	27.015 MHz	25	27.245 MHz	
6	27.025 MHz	26	27.265 MHz	
7	27.035 MHz	27	27.275 MHz	
8	27.055 MHz	28	27.285 MHz	
9	27.065 MHz	29	27.295 MHz	
10	27.075 MHz	30	27.305 MHz	
11	27.085 MHz	31	27.315 MHz	
12	27.105 MHz	32	27.325 MHz	
13	27.115 MHz	33	27.335 MHz	
14	27.125 MHz	34	27.345 MHz	
15	27.135 MHz	35	27.355 MHz	
16	27.155 MHz	36	27.365 MHz	
17	27.165 MHz	37	27.375 MHz	
18	27.175 MHz	38	27.385 MHz	
19	27.185 MHz	39	27.395 MHz	
20	27.205 MHz	40	27.405 MHz	



Page 8 of 46

#### 2.3 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID: **BBO19MINI2**, filing to comply with Part 2, Part 95 of the Federal Communication Commission rules.

#### 2.4 TEST METHODOLOGY

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 95	Personal Radio Services
2	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
3	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
4	ANSI EIA/TIA 382-A-1989	Minimum standards – Citizens band radio service amplitude modulated (AM) transceivers operating in the 27MHz band.

#### 2.5 CALCULATION OF EMISSION INDICATORS

FCC Rules and Regulations Part 2.202: Necessary Bandwidth and Emission Bandwidth

# For AM Mode (ChannelSpacing: 10kHz)

Emission Designator 8K00A3E

Bn = 2M, M may vary between 4000 and 10000 depending on the quality desired.

Speech and music, M = 4000, Bandwidth: 8000 Hz= 8 kHz

A3E portion of the designator represents an AM voice transmission.

Therefore, the entire designator for 10 kHz channel spacing AM mode is 8K00A3E.

# For FM Mode (ChannelSpacing: 10kHz)

Emission Designator 8K00F3E

Bn = 2M, M may vary between 4000 and 10000 depending on the quality desired.

Speech and music, M = 4000, Bandwidth: 8000 Hz= 8 kHz

F3E portion of the designator represents an FM voice transmission.

Therefore, the entire designator for 10 kHz channel spacing FM mode is 8K00F3E.



Page 9 of 46

### 2.6 STATEMENT - COMPLIANCE TO §95.977

§95.977 CBRS tone transmissions.

In addition to the tones permitted under §95.377, CBRS transmitter types may be designed to transmit brief tones to indicate the beginning or end of a transmission.

This device is capable of transmitting a brief (less than one second) audio tone, "Roger Beep", when the PTT button is released on the microphone indicating end of transmission. This function is user selectable and complies with the requirements of §95.377. See User's Manual .

.

#### 2.7 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

#### 2.8 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.



Page 10 of 46

### 3. TEST ENVIRONMENT

#### 3.1 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

#### 3.2 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

#### **CNAS-Lab Code: L5488**

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

#### A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

#### IC-Registration No.: 24842

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 11 of 46

#### 3.3 ENVIRONMENTAL CONDITIONS

NORMAL CONDITIONS	EXTREME CONDITIONS	
15 - 35	-20 - 50	
20 % - 75 %	20 % - 75 %	
86 - 106	86 - 106	
DC13.8V LV: DC 11.73V/HV:DC 15		
	15 - 35 20 % - 75 % 86 - 106	

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

#### 3.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Test Items	Measurement Uncertainty		
Frequency stability	±0.5%		
Transmitter power conducted	±0.8dB		
Transmitter power Radiated	±1.3dB		
Conducted spurious emission 9kHz-40 GHz	±2.7dB		
Conducted Emission	±3.2 dB		
Radiated Emission below 1GHz	±3.9 dB		
Radiated Emission above 1GHz	±4.8 dB		
Occupied Channel Bandwidth	±2 %		
FM deviation	±2 %		
Audio level	±0.98dB		
Low Pass Filter Response	±0.65dB		
Modulation Limiting	0.42 %		
Transient Frequency Behavior	6.8 %		



Page 12 of 46

#### 3.5 LIST OF EQUIPMENTS USED

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023
EXA Signal Analyzer	Aglient	N9020A	W1312-60196	Aug. 18, 2021	Aug. 17, 2022
EXA Signal Analyzer	Aglient	N9020A	MY52090123	Sep. 06, 2021	Sep. 05, 2022
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
preamplifier	ChengYi	EMC184045SE	980508	Sep. 29, 2021	Sep. 28, 2023
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun. 07, 2021	Jun. 06, 2022
HORN ANTENNA	EM	EM-AH-10180	/	Feb. 24, 2022	Feb. 23, 2023
SIGNAL GENERATOR	AGILENT	E4421B	MY43351603	Mar. 04, 2022	Mar. 03, 2023
SIGNAL GENERATOR	R&S	SMT03	A0304261	Jun. 07, 2021	Jun. 06, 2022
ANTENNA	SCHWARZBECK	VULB9168	VULB9168-494	Jan. 08, 2021	Jan. 07, 2023
ANTENNA	SCHWARZBECK	VULB9168	D69250	Apr. 28, 2021	Apr. 27, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Modulation Domain Analyzer	HP	53310A	3121A02467	Jul. 03, 2020	Jul. 02, 2022
Small environmental tester	ESPEC	SH-242		Sep. 03, 2020	Sep. 02, 2022
RF Communication Test Set	HP	8920B	US35010161	Sep. 06, 2021	Sep. 05, 2022
Attenuator	Weinachel Corp	58-30-33	ML030	Oct. 24, 2021	Oct. 23, 2022
RF Cable	R&S	1#		Each time	N/A
RF Cable	R&S	2#		Each time	N/A
Fliter-UHF	Microwave	N25155M2	498705	May 07, 2022	May 06, 2023



Page 13 of 46

### **4.SYSTEM TEST CONFIGURATION**

#### **4.1 EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### **4.2 EUT EXERCISE**

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

#### **4.3 CONFIGURATION OF TESTED SYSTEM**

Fig. 2-1 Configuration of Tested System

EUT

Table 2-1 Equipment Used in Tested System

#### 4.4 EQUIPMENT USED IN TESTED SYSTEM

The Following Peripheral Devices And Interface Cables Were Connected During The Measurement:

☐ Test Accessories Come From The Laboratory

Item	Equipment Model No.		Identifier	Note
1	Load Antenna HG-E10		Terminator DC -3G 50W	Accessories

# 

Item	Equipment	Model No.	Identifier	Note
1	CB Radio	19MINIAMFM	FCC ID: BBO19MINI2	EUT
2	Hand microphone	N/A	N/A	Accessories
3	Car charger	N/A	N/A	Accessories



Page 14 of 46

#### **4.5 SUMMARY OF TEST RESULTS**

Item	FCC Rules	Description of Test	Result
1	§ 95.967& 2.1046(a)	Maximum Transmitter Power	Pass
2	§95.975& 2.1047(a) (b)	Modulation Limit	Pass
3	§95.975& 2.1047(a)	Audio Frequency Response	Pass
4	§95.973& 2.1049	Emission Bandwidth	Pass
5	§95.979& 2.1049	Emission Mask	Pass
6	§95.965& 2.1055(a) (1)	Frequency Stability	Pass
7	§95.979& 2.1051	Spurious Emission on Antenna Port	Pass
8	§95.979& 2.1053	Ratiated Spurious Emission	Pass



Page 15 of 46

#### 5. DESCRIPTION OF TEST MODES

The EUT (CB Radio) has been tested under normal operating condition. (CBRS TX) are chosen for testing at each channel separation.

NO.	TEST MODE DESCRIPTION	CHANNEL SEPARATION
1	CBRS TX CHANNEL 1	10.0 kHz
2	CBRS TX CHANNEL 20	10.0 kHz
3	CBRS TX CHANNEL 40	10.0 kHz

#### Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- Manufacturers use computer PC programming software to switch and operate frequency points, refer to the instructions for details



Report No.: AGC01284220402FE10 Page 16 of 46

#### **6.FREQUENCY STABILITY**

#### **6.1 PROVISIONS APPLICABLE**

Each CBRS transmitter type must be designed such that the transmit carrier frequency (or in the case of SSB transmissions, the reference frequency) remains within 50 parts-per- million of the channel center frequencies specified in §95.963 under all normal operating conditions.

#### **6.2 MEASUREMENT PROCEDURE**


# 6.2.1 Frequency stability versus environmental temperature

- 1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
- 2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1kHz and Video Resolution Bandwidth to 1kHz and Frequency Span to 50kHz.Record this frequency as reference frequency.
- 3. Set the temperature of chamber to 50°C. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
- 4. Repeat step 2 with a 10℃ decreased per stage until the lowest temperature -30℃ is measured, record all measured frequencies on each temperature step.

#### 6.2.2 Frequency stability versus input voltage

- Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15℃ to 25℃.
   Otherwise, an environment chamber set for a temperature of 20℃ shall be used. The EUT shall be powered by DC 13.8V.
- 2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 kHz and Video Resolution Bandwidth to 1kHz. Record this frequency as reference frequency.
- 3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

#### **6.3 MEASUREMENT SETUP**

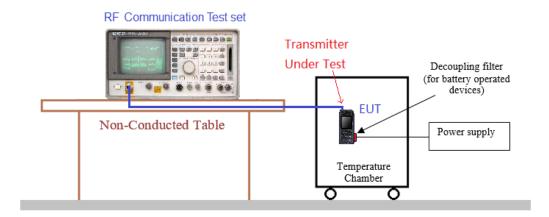



Report No.: AGC01284220402FE10 Page 17 of 46

**6.4 MEASUREMENT RESULTS** 

	10 kHz Cha	annel Separation, AM	I modulation, Assign	ed Frequency For 0	CBRS	
Test co	Test conditions Frequency error (ppm)					
Voltage	Temp	7	Test Frequency (MHz	<u>z</u> )	Limit (ppm)	Result
(V)	(℃)	26.965MHz	27.205MHz	27.405MHz	(PP)	
	-30	0.700	0.653	0.523		
	-20	0.584	0.704	0.823		
	-10	1.087	0.582	1.006		
	0	1.022	0.502	0.943		
13.80	10	1.069	0.529	0.840		
	20	1.033	0.793	0.865	50	Pass
	30	0.649	1.005	0.818		
	40	0.958	0.513	0.856		
	50	0.762	0.989	0.943	1	
15.87	20	0.521	0.794	1.053		
11.73	20	1.003	0.968	0.757		

10 kHz Channel Separation, FM modulation, Assigned Frequency For CBRS								
Test conditions		F						
Voltage	Temp	7	est Frequency (MHz	<u>z</u> )	Limit (ppm)	Result		
(V)	(℃)	26.965MHz	27.205MHz	27.405MHz	(PP)			
	-30	1.020	0.691	1.063				
	-20	0.682	0.881	0.593				
	-10	0.755	0.633	0.544				
	0	0.628	0.598	0.788				
13.80	10	0.681	1.032	0.511				
	20	0.758	0.629	0.651	50	Pass		
	30	0.903	0.801	0.680				
	40	0.919	0.565	0.990				
	50	0.552	0.924	0.517				
15.87	20	1.085	0.661	0.863				
11.73	20	0.667	0.621	0.514				



Page 18 of 46

# 7. EMISSION BANDWIDTH

#### 7.1 PROVISIONS APPLICABLE

FCC Part 95.973, FCC Part 2.1049


Each CBRS transmitter type must be designed such that the occupied bandwidth does not exceed the authorized bandwidth for the emission type under test.


- (a) AM and FM. The authorized bandwidth for emission type A3E and F3E is 8 kHz.
- (b)SSB.The authorized bandwidth for emission types J3E, R3E, and H3E is 4 kHz.

### 7.2 MEASUREMENT PROCEDURE

- 1. Connect the equipment as illustrated
- The EUT was modulated by 2.5kHz sine wave audio signal; the level of the audio signal employed is 16dB greater than that necessary to produce 50% of rated system deviation.
  - Rated system deviation is 2.5 kHz for 12.5kHz channel spacing).
- 3. Spectrum set as follow:
  - Centre frequency = the nominal EUT channel center frequency,
  - The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of 1.5 × OBW is sufficient)
  - RBW = 1% to 5% of the anticipated OBW, VBW  $\geq$  3  $\times$  RBW, Sweep = auto, Detector function = peak, Trace = max hold
- 4. Set 99% Occupied Bandwidth and 26dB Bandwidth
- 5. Measure and record the results in the test report.

#### 7.3 MEASUREMENT SETUP

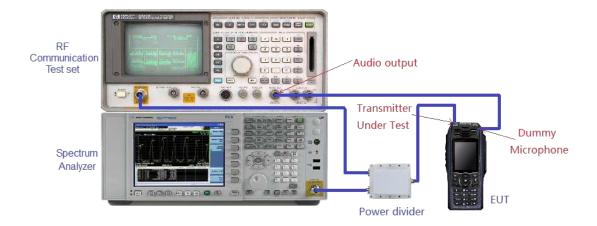






#### 7.4 MEASUREMENT RESULTS

Emission Bandwidth Measurement Result-CBRS						
On a ration of Francisco	10 kHz Channel Separation					
Operating Frequency	Occupied Bandwidth	Emission Bandwidth	Limits	Result		
26.965 MHz	5.553 kHz	5.887 kHz	8.0 kHz	Pass		
27.205 MHz	5.552 kHz	5.884 kHz	8.0 kHz	Pass		
27.405 MHz	5.543 kHz	5.888 kHz	8.0 kHz	Pass		

# Test plot as follows:

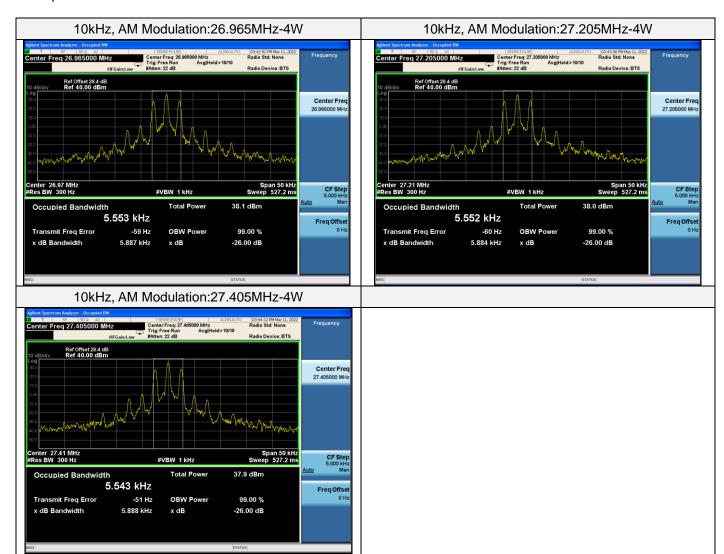

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





Emission Bandwidth Measurement Result-CBRS							
On a ration a Francisco	10 kHz Channel Separation						
Operating Frequency	Occupied Bandwidth	Emission Bandwidth	Limits	Result			
26.965 MHz	5.581 kHz	5.843 kHz	8.0 kHz	Pass			
27.205 MHz	5.578 kHz	5.845 kHz	8.0 kHz	Pass			
27.405 MHz	5.580 kHz	5.837 kHz	8.0 kHz	Pass			

#### Test plot as follows:

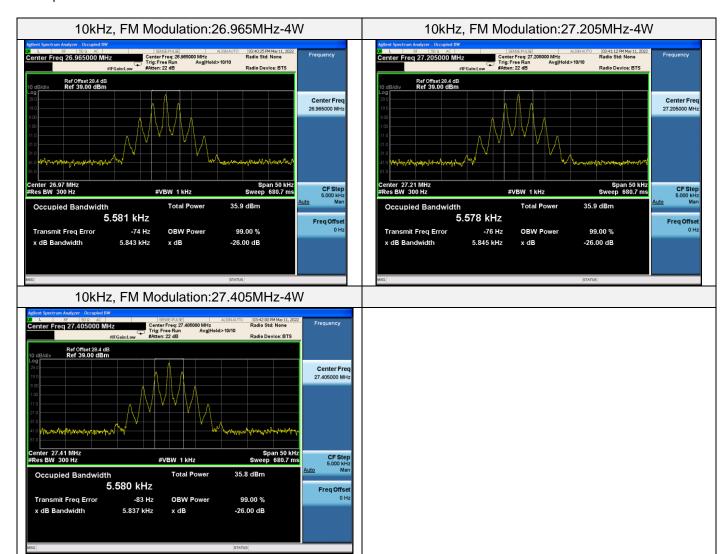



Page 21 of 46

#### 8. RATIATED SPURIOUS EMISSION

#### 8.1 PROVISIONS APPLICABLE

FCC Part 95.979(a), FCC Part 2.1049


Each CBRS transmitter type must be designed to comply with the applicable unwanted emissions limits in this section. The power of unwanted emissions must be attenuated below the transmitter output power in Watts (P) as specified in the applicable paragraphs listed in the following table:

Emission type	Paragraph		
A3E,F3E	(1), (3), (5), (6)		
H3E, J3E, R3E	(2), (4), (5), (6)		

- (1) 25 dB (decibels) in the frequency band 4 kHz to 8 kHz removed from the channel center frequency;
- (2) 25 dB in the frequency band 2 kHz to 6 kHz removed from the channel center frequency;
- (3) 35 dB in the frequency band 8 kHz to 20 kHz removed from the channel center frequency;
- (4) 35 dB in the frequency band 6 kHz to 10 kHz removed from the channel center frequency;
- (5) 53 + 10 log (P) dB in any frequency band removed from the channel center frequency by more than 250% of the authorized bandwidth.
- (6) 60 dB in any frequency band centered on a harmonic (i.e., an integer multiple of two or more times) of the carrier frequency.

#### **8.2 MEASUREMENT PROCEDURE**

- 1. EUT was placed on a 0.8 or 1.5meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made. The radiated emission measurements of all transmit frequencies in all channels were measured with peak detector.
- 2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
- 4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the





substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

- 5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (PcI) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test
- 6. The measurement results are obtained as described below: Power(EIRP)=PMea- PAg Pcl Ga The measurement results are amend as described below:Power(EIRP)=PMea- Pcl Ga
- 7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- 8. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.
- 9. Test the EUT in the lowest channel, the middle channel the Highest channel

#### **8.3 MEASUREMENT SETUP**

Radiated Emissions Below 30MHz Test Setup

9 m

Antenna Tower

Antenna Tower

Antenna Tower


Artenna

Ground Reference Plane

Ground Reference Plane


Ground Reference Plane

Radiated Emissions Below 30MHz-1GHz Test Setup

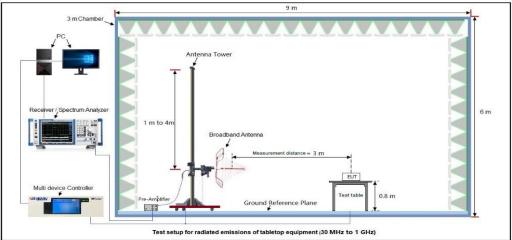


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






# Radiated Emissions Above 1GHz Test Setup

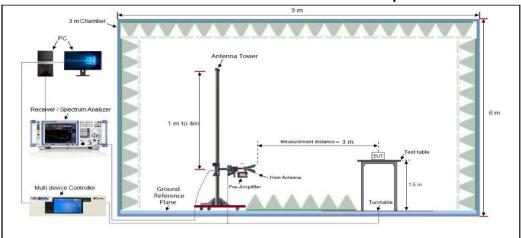


#### **8.4 MEASUREMENT RESULTS**

Preliminary calculation	Final Result		
P(dBm)=30+10log 【P(W)】=36.02dBm	Limit= Preliminary calculation-60dB=-24dBm		


- 1. Factor=Antenna Factor + Cable loss. (Below 1GHz)
- 2. Factor=Antenna Factor+ Cable loss -Pre-amplifier. (Above 1 GHz)
- 3. Margin=Limit- Level
- 4. the unwanted emission should be attenuated below TP by at least 60 dB.
- 5. In the frequency range of 9KHz-30MHz, in addition to displaying the Fundamental level, the radiated spurious emission level is much less than 60dB of the carrier power, so it is ignored.






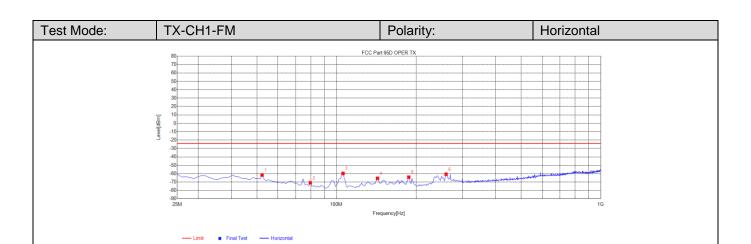


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	52.3	-94.76	-61.76	-24.00	37.76	33.00	236	Horizontal
2	79.6	-97.78	-70.98	-24.00	46.98	26.80	82	Horizontal
3	105.925	-84.64	-59.75	-24.00	35.75	24.89	351	Horizontal
4	142.975	-95.04	-65.67	-24.00	41.67	29.37	217	Horizontal
5	187.825	-92.75	-64.24	-24.00	40.24	28.51	245	Horizontal
6	259.975	-93.17	-60.77	-24.00	36.77	32.40	73	Horizontal

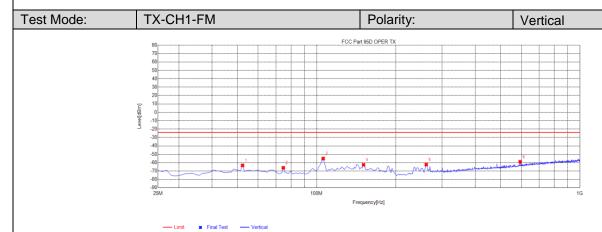


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	52.3	-93.55	-63.38	-24.00	39.38	30.17	101	Vertical
2	74.725	-94.46	-66.22	-24.00	42.22	28.24	17	Vertical
3	105.925	-85.58	-55.19	-24.00	31.19	30.39	247	Vertical
4	150.775	-96.31	-62.66	-24.00	38.66	33.65	341	Vertical
5	260.95	-91.89	-62.41	-24.00	38.41	29.48	266	Vertical
6	593.425	-97.62	-59.06	-24.00	35.06	38.56	73	Vertical






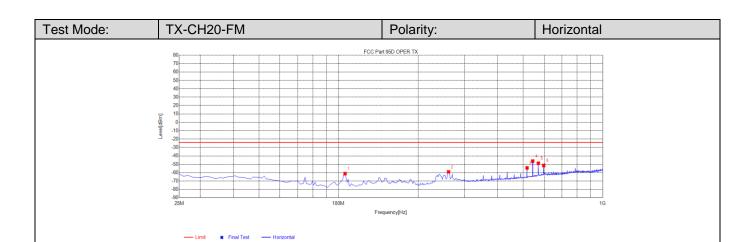


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	105.925	-86.13	-61.24	-24.00	37.24	24.89	289	Horizontal
2	260.95	-91.61	-59.16	-24.00	35.16	32.45	252	Horizontal
3	517.375	-91.29	-54.35	-24.00	30.35	36.94	187	Horizontal
4	543.7	-84.09	-46.22	-24.00	22.22	37.87	196	Horizontal
5	571	-87.68	-48.85	-24.00	24.85	38.83	196	Horizontal
6	598.3	-91.23	-51.44	-24.00	27.44	39.79	205	Horizontal

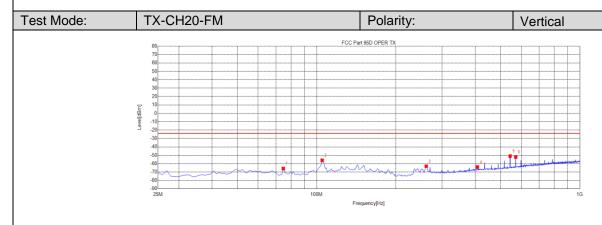


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	74.725	-94.17	-65.93	-24.00	41.93	28.24	208	Vertical
2	104.95	-86.27	-56.07	-24.00	32.07	30.20	339	Vertical
3	260.95	-92.67	-63.19	-24.00	39.19	29.48	171	Vertical
4	408.175	-99.08	-63.98	-24.00	39.98	35.10	329	Vertical
5	543.7	-88.40	-51.00	-24.00	27.00	37.40	54	Vertical
6	4209.2459	-46.53	-43.34	-13.00	30.34	3.19	0	Vertical





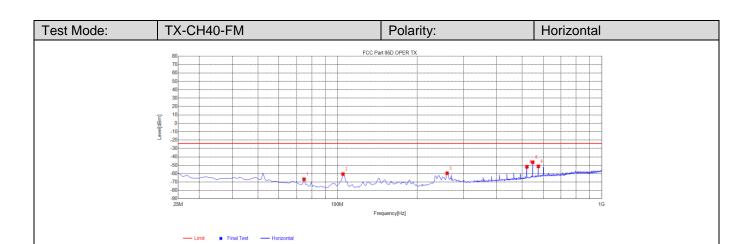


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	74.725	-94.47	-66.76	-24.00	42.76	27.71	35	Horizontal
2	104.95	-85.42	-60.58	-24.00	36.58	24.84	306	Horizontal
3	259.975	-91.88	-59.48	-24.00	35.48	32.40	198	Horizontal
4	521.275	-88.94	-51.86	-24.00	27.86	37.08	179	Horizontal
5	548.575	-84.40	-46.36	-24.00	22.36	38.04	198	Horizontal
6	575.875	-90.30	-51.30	-24.00	27.30	39.00	198	Horizontal

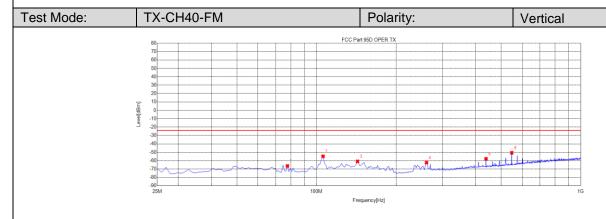



NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	77.65	-94.85	-66.39	-24.00	42.39	28.46	306	Vertical
2	105.925	-85.20	-54.81	-24.00	30.81	30.39	117	Vertical
3	142.975	-95.08	-60.90	-24.00	36.90	34.18	9	Vertical
4	260.95	-91.92	-62.44	-24.00	38.44	29.48	206	Vertical
5	438.4	-93.36	-57.83	-24.00	33.83	35.53	278	Vertical
6	548.575	-88.19	-50.67	-24.00	26.67	37.52	54	Vertical


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






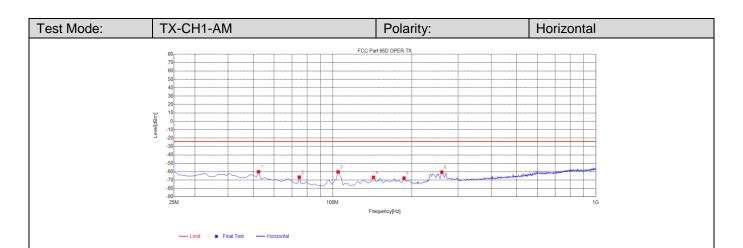

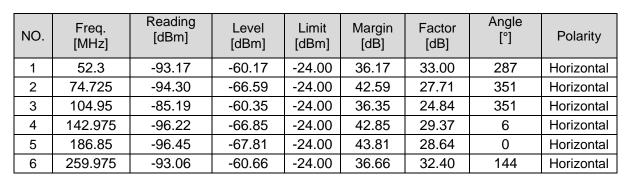


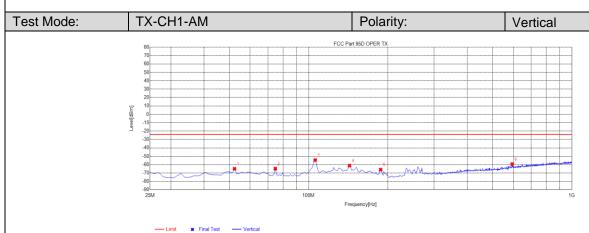


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	52.3	-95.20	-65.03	-24.00	41.03	30.17	9	Vertical
2	74.725	-93.11	-64.87	-24.00	40.87	28.24	236	Vertical
3	105.925	-85.00	-54.61	-24.00	30.61	30.39	26	Vertical
4	142.975	-95.37	-61.19	-24.00	37.19	34.18	117	Vertical
5	187.825	-95.16	-66.02	-24.00	42.02	29.14	163	Vertical
6	593.425	-97.99	-59.43	-24.00	35.43	38.56	72	Vertical






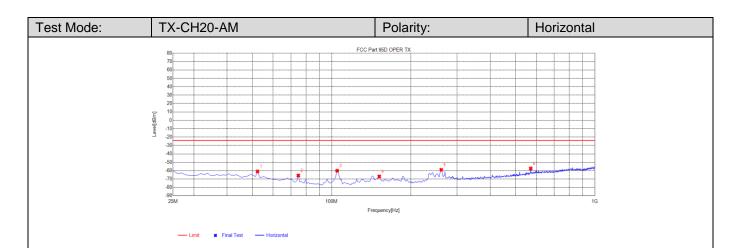


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	52.3	-94.02	-61.02	-24.00	37.02	33.00	86	Horizontal
2	74.725	-93.54	-65.83	-24.00	41.83	27.71	0	Horizontal
3	104.95	-85.02	-60.18	-24.00	36.18	24.84	86	Horizontal
4	151.75	-96.28	-66.94	-24.00	42.94	29.34	261	Horizontal
5	260.95	-91.47	-59.02	-24.00	35.02	32.45	168	Horizontal
6	571	-96.30	-57.47	-24.00	33.47	38.83	306	Horizontal

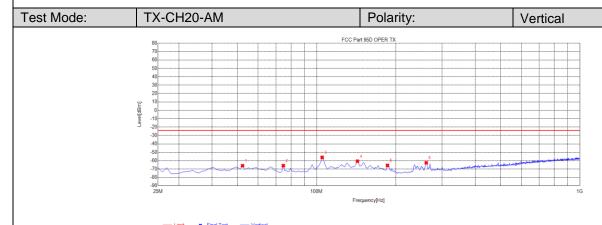

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	52.3	-96.28	-66.11	-24.00	42.11	30.17	1	Vertical
2	74.725	-94.30	-66.06	-24.00	42.06	28.24	360	Vertical
3	104.95	-86.35	-56.15	-24.00	32.15	30.20	91	Vertical
4	142.975	-94.90	-60.72	-24.00	36.72	34.18	220	Vertical
5	185.875	-95.22	-65.73	-24.00	41.73	29.49	136	Vertical
6	260.95	-92.16	-62.68	-24.00	38.68	29.48	136	Vertical





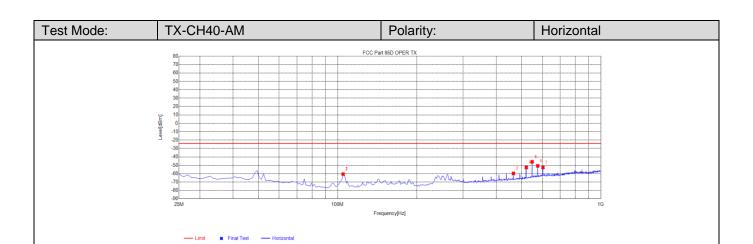

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	104.95	-85.45	-60.61	-24.00	36.61	24.84	6	Horizontal
2	104.95	-85.45	-60.61	-24.00	36.61	24.84	6	Horizontal
3	465.7	-95.42	-59.75	-24.00	35.75	35.67	0	Horizontal
4	521.275	-89.69	-52.61	-24.00	28.61	37.08	180	Horizontal
5	548.575	-83.93	-45.89	-24.00	21.89	38.04	189	Horizontal
6	575.875	-89.72	-50.72	-24.00	26.72	39.00	189	Horizontal

Test Mode:	TX-CH40-AM	Polarity:	Vertical
	80 70 60 60 50 40 30 20 20 10 10 40 30 30 30 30 40 40 40 40 40 40 40 40 40 40 40 40 40	FCC Part 95D OPER TX	
1			

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	105.925	-86.45	-56.06	-24.00	32.06	30.39	73	Vertical
2	142.975	-96.08	-61.90	-24.00	37.90	34.18	219	Vertical
3	438.4	-93.63	-58.10	-24.00	34.10	35.53	317	Vertical
4	521.275	-93.79	-56.91	-24.00	32.91	36.88	64	Vertical
5	548.575	-88.86	-51.34	-24.00	27.34	37.52	45	Vertical
6	575.875	-93.25	-55.10	-24.00	31.10	38.15	73	Vertical





Page 30 of 46

#### **8.5 EMISSION MASK PLOT**

The detailed procedure employed for Emission Mask measurements are specified as following:


- -Connect the equipment as illustrated.
- -Spectrum set as follow:
- 1. Centre frequency = fundamental frequency, Span=50kHz for 10kHz, RBW=300Hz, VBW=1000Hz;
- 2. Sweep = auto, Detector function = peak, Trace = max hold
- 3. Key the transmitter, and set the level of the unmodulated carrier to a full scale reference line. This is the 0dB reference for the measurement.
- 4. Modulate the transmitter with a 2500 Hz sine wave at an input level 16 dB greater than that necessary to produce 50% of rated system deviation
  - The input level shall be established at the frequency of maximum response of the audio modulating circuit.
- 5. Transmitters employing digital modulation techniques that bypass the limiter and the audio low-pass filter shall be modulated as specified by the manufacturer.
- 6. Measure and record the results in the test report.

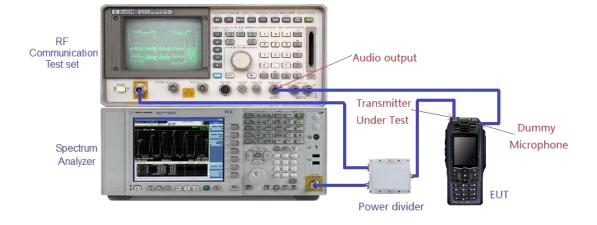





Test plot as follows:

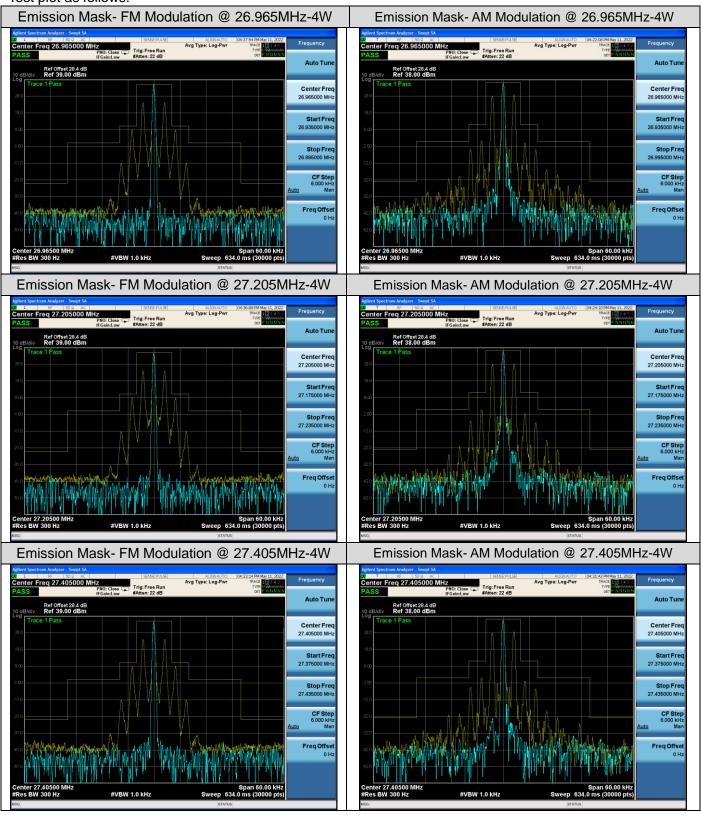

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 32 of 46

# 9. SPURIOUS EMISSION ON ANTENNA PORT

#### 9.1 PROVISIONS APPLICABLE

Please refer to FCC 47 CFR 2.1051, 2.1057 & 95.979 for specification details. Emissions shall be attenuated below the mean output power of the transmitter as follows:

FCC Rules	Attenuation Limit (dBc)
§ 95.979	At least 53 + 10 log (P) dB
§ 95.979	60 dB in any frequency band centered on a harmonic (i.e., an integer multiple of two or more times) of the carrier frequency.

 $53 + 10 \log (Pwatts)$ 

Calculation: Limit (dBm) =EL-53-10log10 (TP)

Notes: EL is the emission level of the Output Power expressed in dBm,

In this application, the EL is P(dBm).


Limit (dBm) =  $P(dBm)-53-10 \log (Pwatts) = -23 dBm$ 

#### 9.2 MEASUREMENT METHOD

- 1. The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation.
- 2. The resolution bandwidth of the spectrum analyzer was set to 100 kHz. Sufficient scans were taken to
- 3. show any out of band emission up to 10th. Harmonic for the lower and the highest frequency range.
- 4. Set RBW 1 kHz, VBW 3 kHz in the frequency band 9KHz to 150KHz;
  - Set RBW 10 kHz, VBW 30 kHz in the frequency band 150KHz to 20MHz;
  - Set RBW 100 kHz, VBW 300 kHz in the frequency band 20MHz to 1GHz;
  - While set RBW=1MHz.VBW=3MHz from the 1GHz to 10th Harmonic.
- 5. The audio input was set the unmodulated carrier, the resulting picture is print out for each channel separation.


# 9.3 MEASUREMENT SETUP









#### 9.4 MEASUREMENT RESULTS

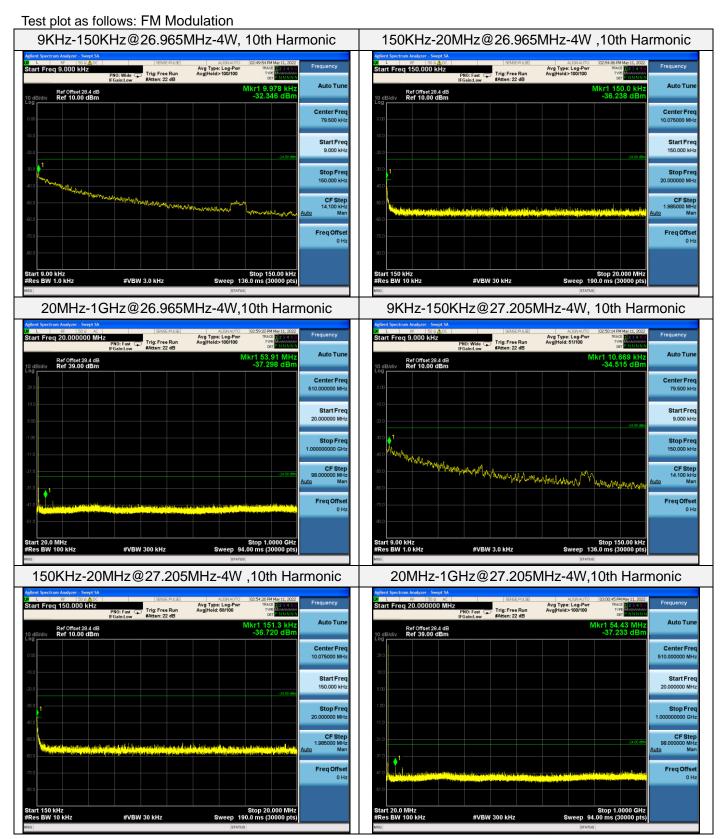






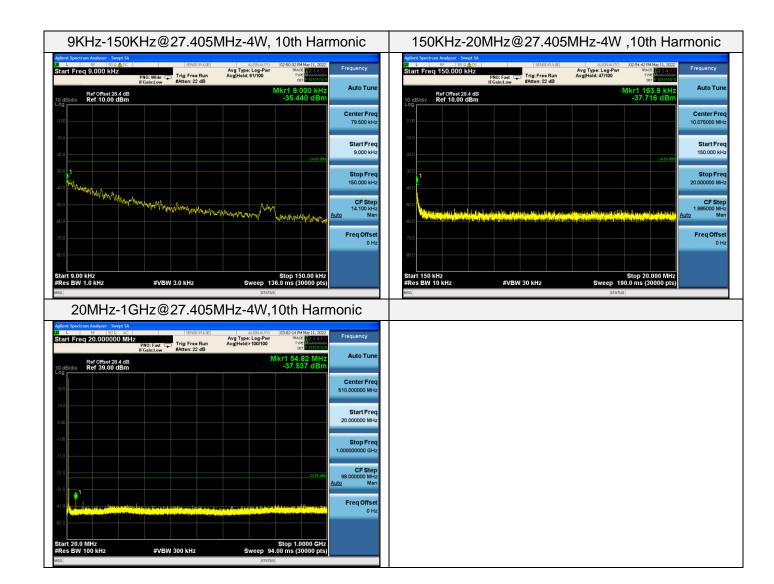



Page 35 of 46

# Test plot as follows: AM Modulation

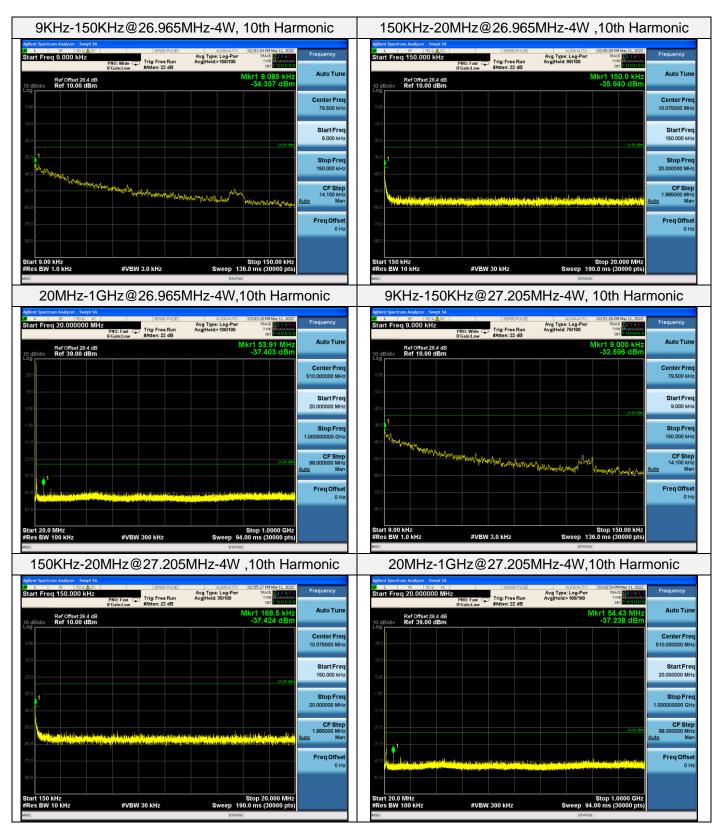

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/