

TEST REPORT

FCC ID: BBO9940

Product: Sports camera

Model No.: 9940

Trade mark: 

Report No.: TCT170527E001

Issued Date: Jun. 05, 2017

Issued for:

Cobra Electronics Corporation

6500 West Cortland Street Chicago, IL 60707 USA

Issued By:

Shenzhen Tongce Testing Lab

1F, Leinu Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China

TEL: +86-755-27673339

FAX: +86-755-27673332

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab. This document may be altered or revised by Shenzhen Tongce Testing Lab personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. Test Certification	3
2. Test Result Summary	4
3. EUT Description.....	5
4. Test Methodology	6
4.1. Decision of Final Test Mode	6
4.2. EUT System Operation.....	6
5. Setup of Equipment under Test	7
5.1. Description of Support Units.....	7
5.2. Configuration of System Under Test	8
6. Facilities and Accreditations	9
6.1. Facilities.....	9
6.2. Measurement Uncertainty	9
7. Emission Test	10
7.1. Conducted Emission at Mains Terminals	10
7.2. Radiated Emission.....	14
8. Photographs of Test Configuration	20
9. Photographs of EUT	22

1. Test Certification

Product:	Sports camera
Model No.:	9940
Applicant:	Cobra Electronics Corporation
Address:	6500 West Cortland Street Chicago, IL 60707 USA
Manufacturer:	Guangzhou Yaozhong Electronics Co., Ltd.
Address:	No.2, Shaxing Road, Shajiao, Lanhe, Nansha district, Guangzhou, China
Test Voltage:	DC 5 V(PC Input AC 120 V/ 60 Hz), DC 5 V(Adapter Input AC 120 V/ 60 Hz)
Date of Test:	May 30, 2017 ~ Jun. 02, 2017
Applicable Standards:	47 CFR FCC Part 15 Subpart B: 2016 ANSI C63.4: 2014

The above equipment has been tested by Shenzhen Tongce Testing Lab and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By: Jerry
Jerry

Date: Jun. 02, 2017

Check By: Joe Zhou
Joe Zhou

Date: Jun. 05, 2017

Approved By: Tomsin
Tomsin

Date: Jun. 05, 2017

2. Test Result Summary

Emission		
Test Method	Item	Result
FCC 47 CFR Part 15 Subpart B	Conducted Emission at Mains Terminals	Pass
	Radiated Emission	Pass

Note:

1. Pass: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.
5. The information of measurement uncertainty is available upon the customer's request.

3. EUT Description

Product Name:	Sports camera
Model No.:	9940
Product Parameter:	Input: DC 5 V, 1 A
AC Mains:	☐ Shielded ☐ Unshielded, ☐ Detachable ☐ Un-detachable ☒ Not applicable ☐ Length:
USB Line:	☐ Shielded ☒ Unshielded, ☒ Detachable ☐ Un-detachable ☐ Not applicable ☒ Length: 0.8 m
Control Line:	☐ Shielded ☐ Unshielded, ☐ Detachable ☐ Un-detachable ☒ Not applicable ☐ Length:

4. Test Methodology

4.1. Decision of Final Test Mode

The EUT was tested together with the thereafter additional components, and a configuration, which produced the worst emission levels, was selected and recorded in this report.

The following test mode(s) were assessed:

Test Mode
Mode 1: Charging and Data Transmitting
Mode 2: Charging and Camera Shooting
Mode 3: Charging and SD Playing

The following test mode was found to produce the highest emission level.

The Worst Test Mode		
Emission	Conducted Emission	Mode 1: Charging and Data Transmitting
	Radiated Emission	Mode 1: Charging and Data Transmitting

4.2. EUT System Operation

1. Set up EUT with the support equipments.
2. Make sure the EUT work normally during the test.

5. Setup of Equipment under Test

5.1. Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
Monitor	19PFL3120/T3	AU2A1241000 762	/	PHILIPS
PC	BM6620	D1PFCG0008 HP	/	ASUS
Keyboard	PK1100U	04G10418003 9DP	/	ASUS
Mouse	MOBTUO	04G12561017 0DP	/	ASUS
SD Card	SDSDU-016G	/	/	SanDisk

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5.2. Configuration of System Under Test

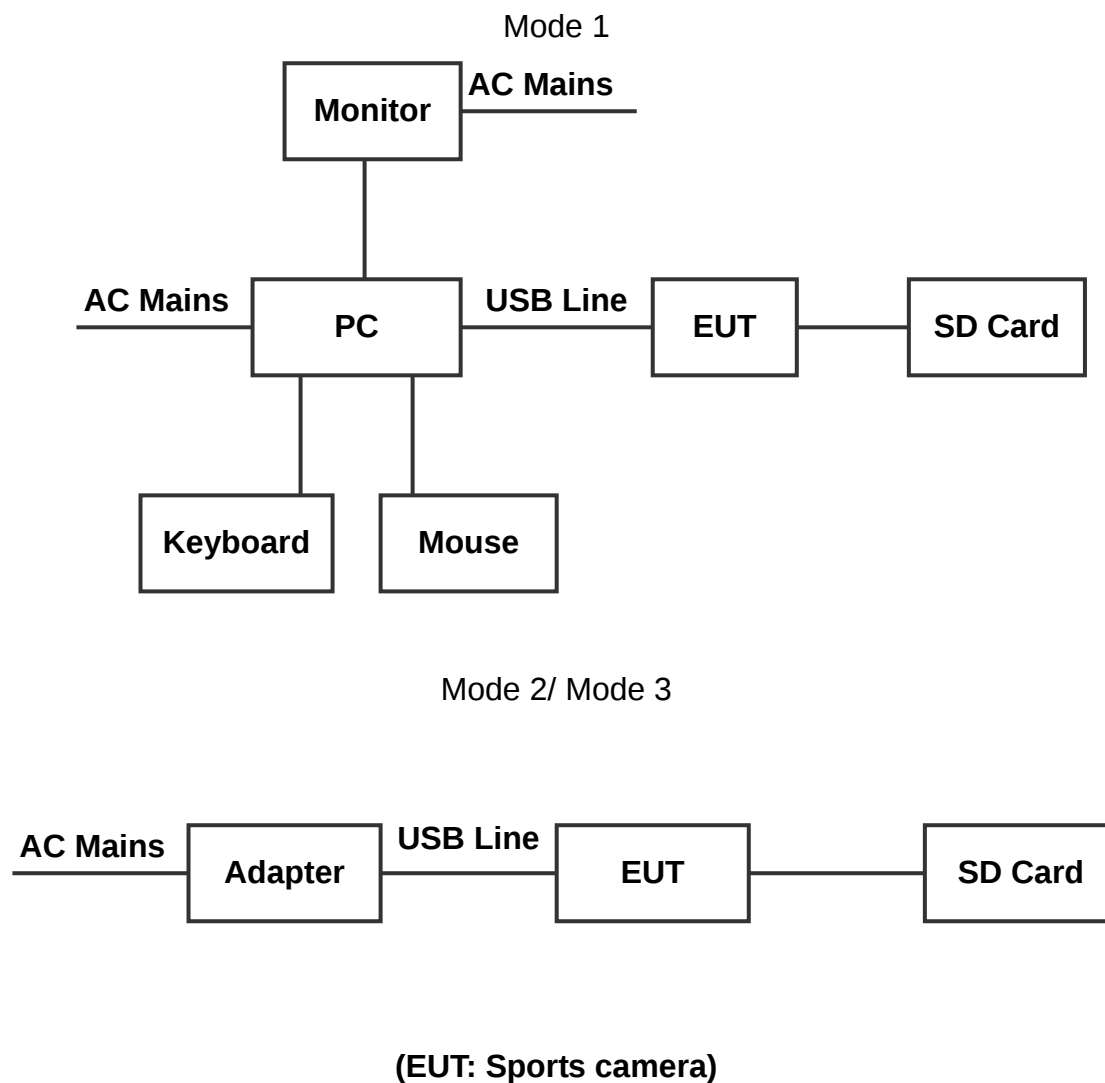

6. Facilities and Accreditations

6.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

FCC - Registration No.: 572331

Shenzhen Tongce Testing Lab

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 32. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.2. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

No.	Item	MU
1.	Temperature	$\pm 0.1^{\circ}\text{C}$
2.	Humidity	$\pm 1.0 \%$
3.	Spurious Emissions, Conducted	$\pm 2.56 \text{ dB}$
4.	All Emissions, Radiated	$\pm 4.50 \text{ dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of $k=2$.

7. Emission Test

7.1. Conducted Emission at Mains Terminals

7.1.1. Test Specification

Test Requirement:	FCC 47 CFR Part 15 Subpart B
Test Method:	ANSI C63.4: 2014
Frequency Range:	150 kHz to 30 MHz

7.1.2. Limits

Frequency (MHz)	Class A dB(uV)		Class B dB(uV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 – 56 ^a	56 – 46 ^a
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

a. Decreases with the logarithm of the frequency

7.1.3. Test Instruments


Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCS30	100139	Aug. 11, 2017
LISN	Schwarzbeck	NSLK 8126	8126453	Aug. 16, 2017

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

7.1.4. Test Method

The AMN was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane. This distance was between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the AMN. All power was connected to the system through Artificial Mains Network (AMN). Conducted voltage measurements on mains lines were made at the output of the AMN

7.1.5. Block Diagram of Test Setup

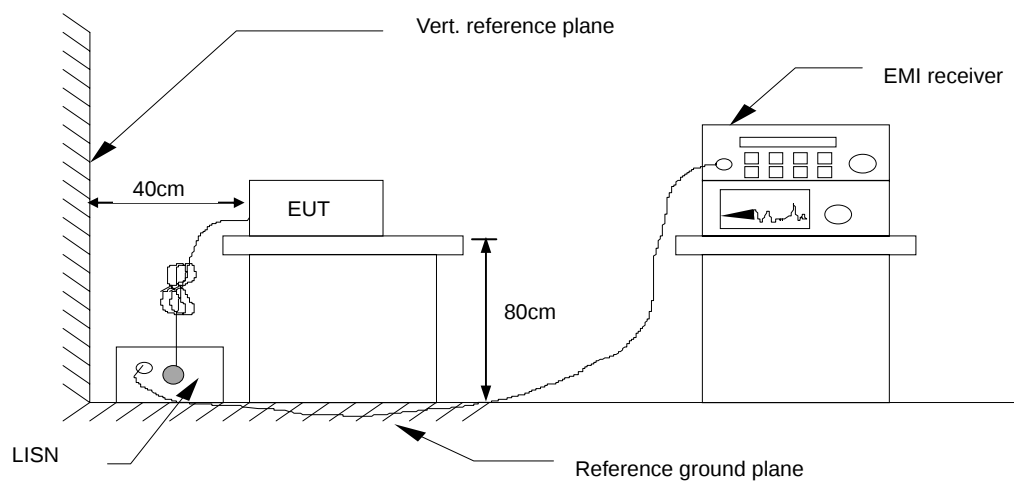

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.1.6. Test Results

Test Environment:	Temp.: 26 °C	Humid.: 60 %	Press.: 96 kPa
Test Mode:	Mode 1, Mode 2, Mode 3		
Test Voltage:	DC 5 V(PC Input AC 120 V/ 60 Hz), DC 5 V(Adapter Input AC 120 V/ 60 Hz)		
Test Result:	Pass		

Note:

L1 = Live Line / N = Neutral Line

“---” denotes the emission level was or more than 2dB below the Average limit, so no re-check anymore.

Freq. = Emission frequency in MHz

Reading level dB(μV) = Receiver reading

Corr. Factor (dB) = Attenuator factor + Cable loss

Level dB(μV) = Reading level dB(μV) + Corr. Factor (dB)


Limit dB(μV) = Limit stated in standard

Margin (dB) = Level dB(μV) – Limits dB(μV)

Q.P. =Quasi-Peak


AVG=Average

Please refer to following diagram for individual

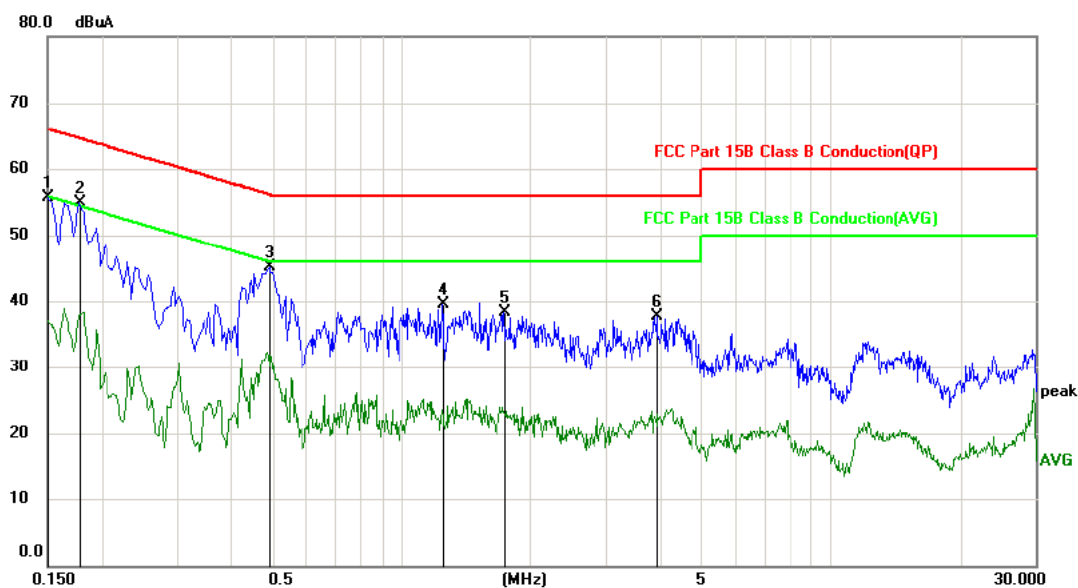

Site: Phase: **L1** Temperature: 26
 Limit: FCC Part 15B Class B Conduction(QP) Power: Humidity: 60 %
 Mode: Charging and Data Transmitting
 Note: DC 5V(PC Input AC 120V/60Hz)

No.	Mk.	Freq. MHz	Reading Level dBuA	Correct Factor dB	Measure- ment dBuA	Limit dBuA	Over dB	Detector	Comment
1		0.1500	54.22	1.47	55.69	66.00	-10.31	peak	
2	*	0.1770	53.37	1.46	54.83	64.63	-9.80	peak	
3		0.4920	43.85	1.30	45.15	56.13	-10.98	peak	
4		1.2480	38.22	1.32	39.54	56.00	-16.46	peak	
5		1.7385	36.78	1.57	38.35	56.00	-17.65	peak	
6		3.9390	36.70	0.99	37.69	56.00	-18.31	peak	

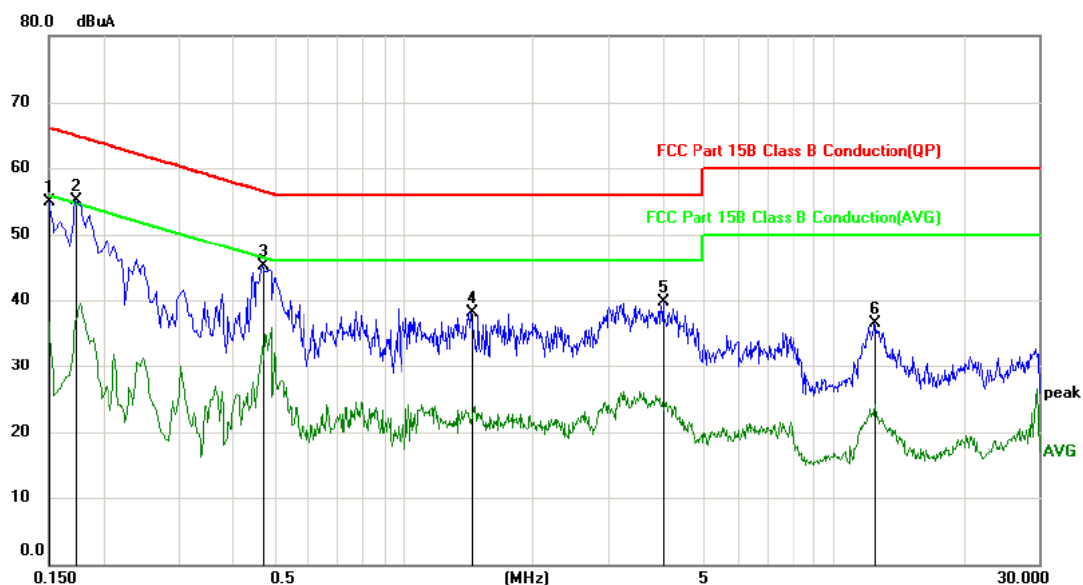

Site: Phase: **N** Temperature: 26
 Limit: FCC Part 15B Class B Conduction(QP) Power: Humidity: 60 %
 Mode: Charging and Data Transmitting
 Note: DC 5V(PC Input AC 120V/60Hz)

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuA	dB	dBuA	dBuA	dB	Detector	Comment
1		0.1500	53.53	1.47	55.00	66.00	-11.00	peak	
2	*	0.1725	53.61	1.46	55.07	64.84	-9.77	peak	
3		0.4695	43.87	1.31	45.18	56.52	-11.34	peak	
4		1.4369	36.68	1.41	38.09	56.00	-17.91	peak	
5		4.0109	38.77	0.96	39.73	56.00	-16.27	peak	
6		12.4485	35.07	1.42	36.49	60.00	-23.51	peak	

7.2. Radiated Emission

7.2.1. Test Specification

Test Requirement:	FCC 47 CFR Part 15 Subpart B
Test Method:	ANSI C63.4: 2014
Frequency Range:	30 MHz to 6000 MHz
Measurement Distance:	3 m
Antenna Polarization:	Horizontal & Vertical

7.2.2. Limits

Frequency (MHz)	Class A (at 3m)	Class B (at 3m)
	dBuV/m	dBuV/m
30 ~ 88	49.0	40.0
88 ~ 216	53.5	43.5
216 ~ 960	56.4	46.0
960 ~ 1000	59.5	54.0

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level $\text{dB}(\mu\text{V}/\text{m}) = 20 \log \text{Emission level } (\mu\text{V}/\text{m})$.

7.2.3. Test Instruments


Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESVD	100008	Aug. 11, 2017
Spectrum Analyzer	R&S	FSEM	848597-001	Aug. 11, 2017
Amplifier	HP	8447D	2727A05017	Aug. 11, 2017
Amplifier	EM	EM30265	07032613	Aug. 11, 2017
Broadband Antenna	Schwarzbeck	VULB9163	340	Aug. 13, 2017
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Aug. 13, 2017

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

7.2.4. Test Method

Measurements were made in a 3-meter semi-anechoic chamber or Open Area Test Site that complies to CISPR 16. Preliminary (peak) measurements were performed at an antenna to EUT separation distance of 3 meter. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in horizontal and vertical polarities. Final measurements (quasi-peak) were then performed by rotating the EUT 360° and adjusting the receive antenna height from 1 to 4 m. All frequencies were investigated in both horizontal and vertical antenna polarity, where applicable. Block Diagram of Test Setup.

7.2.5. Block Diagram of Test Setup

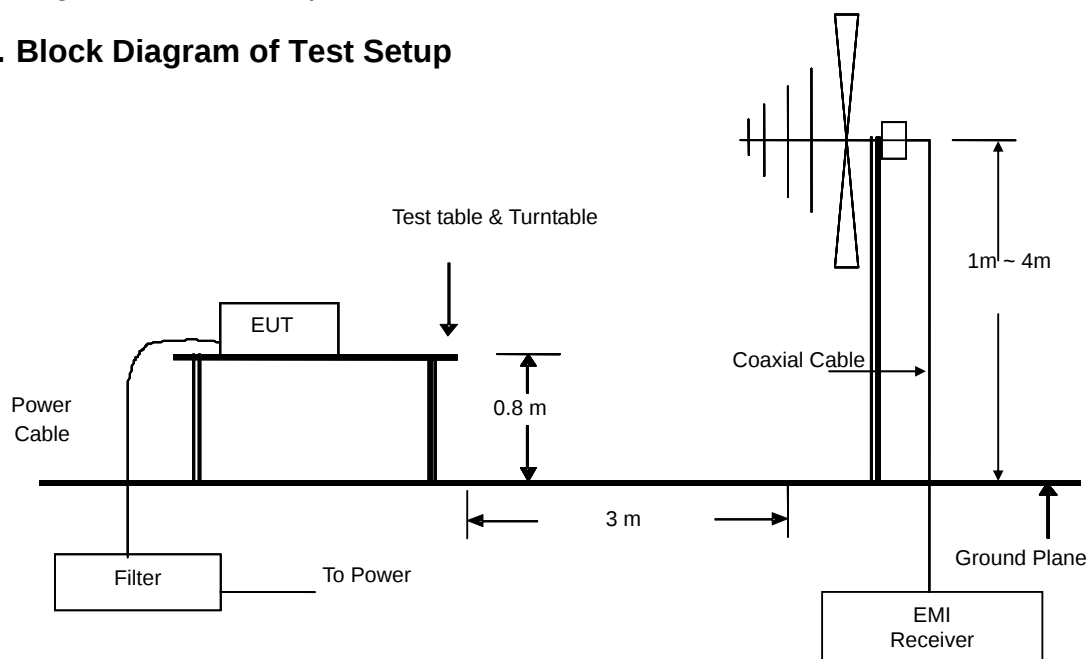

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration

7.2.6. Test Results

Test Environment:	Temp.: 25 °C	Humid.: 55 %	Press.: 96 kPa
Test Mode:	Mode 1, Mode 2, Mode 3		
Test Voltage:	DC 5 V(PC Input AC 120 V/ 60 Hz), DC 5 V(Adapter Input AC 120 V/ 60 Hz)		
Test Result:	Pass		

Note:

Freq. = Emission frequency in MHz

Reading level dB(μV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss


Measurement dB(μV/m) = Reading level dB(μV) + Corr. Factor (dB)

Limit dB(μV/m) = Limit stated in standard

Margin (dB) = Measurement dB(μV/m) – Limits dB(μV/m)

Q.P. =Quasi-Peak

Please refer to following diagram for individual

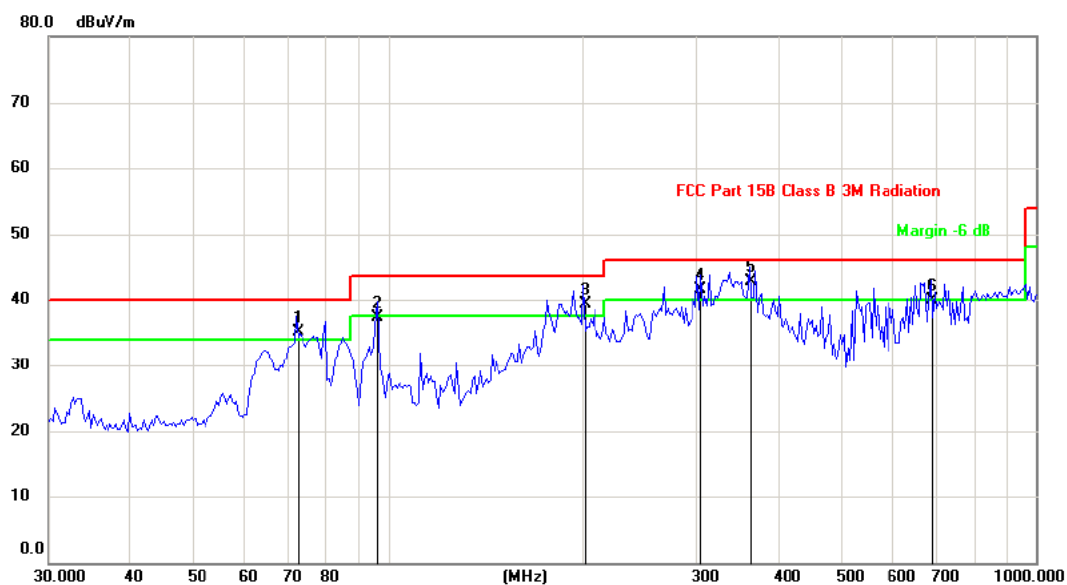

Site

Polarization: **Horizontal**

Temperature: 25

Limit: FCC Part 15B Class B 3M Radiation


Power:

Humidity: 55 %

Mode: Charging and Data Transmitting


Note: DC 5V(PC Input AC 120V/60Hz)

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	!	72.2111	46.20	-11.10	35.10	40.00	-4.90	QP		
2		96.3229	44.30	-6.95	37.35	43.50	-6.15	QP		
3	!	200.0432	48.30	-9.07	39.23	43.50	-4.27	QP		
4	!	304.9547	46.60	-5.05	41.55	46.00	-4.45	QP		
5	*	360.9775	45.70	-2.94	42.76	46.00	-3.24	QP		
6		689.0510	36.30	3.55	39.85	46.00	-6.15	QP		

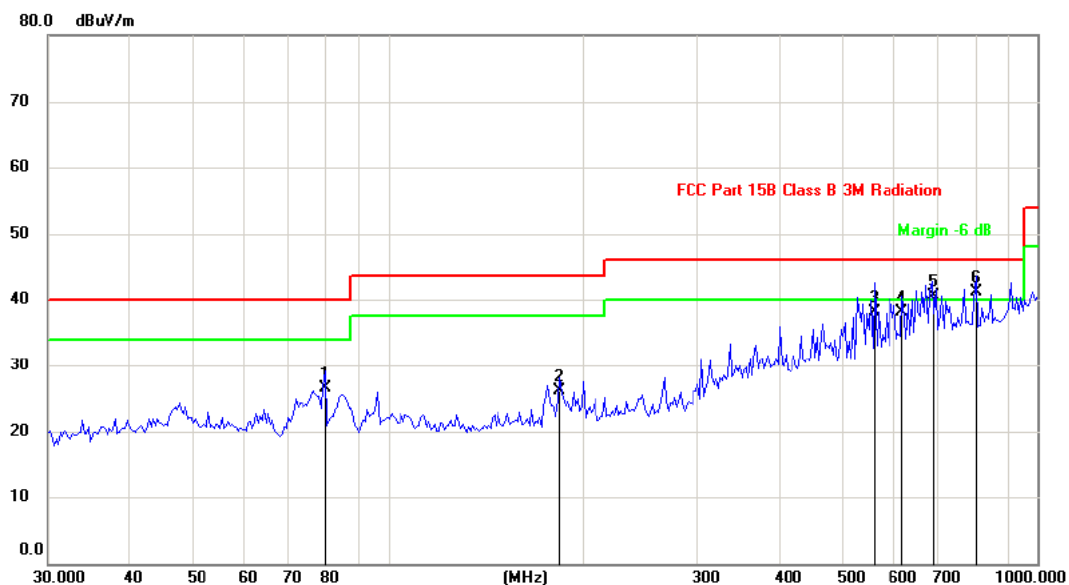


Site: Polarization: **Vertical** Temperature: 25
 Limit: FCC Part 15B Class B 3M Radiation Power: Humidity: 55 %
 Mode: Charging and Data Transmitting
 Note: DC 5V(PC Input AC 120V/60Hz)

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		80.2382	37.42	-11.01	26.41	40.00	-13.59	QP		
2		183.8660	35.52	-9.48	26.04	43.50	-17.46	QP		
3		562.0143	37.40	0.74	38.14	46.00	-7.86	QP		
4		620.1167	35.58	2.62	38.20	46.00	-7.80	QP		
5	!	689.0510	36.95	3.55	40.50	46.00	-5.50	QP		
6	*	804.2522	35.20	5.83	41.03	46.00	-4.97	QP		

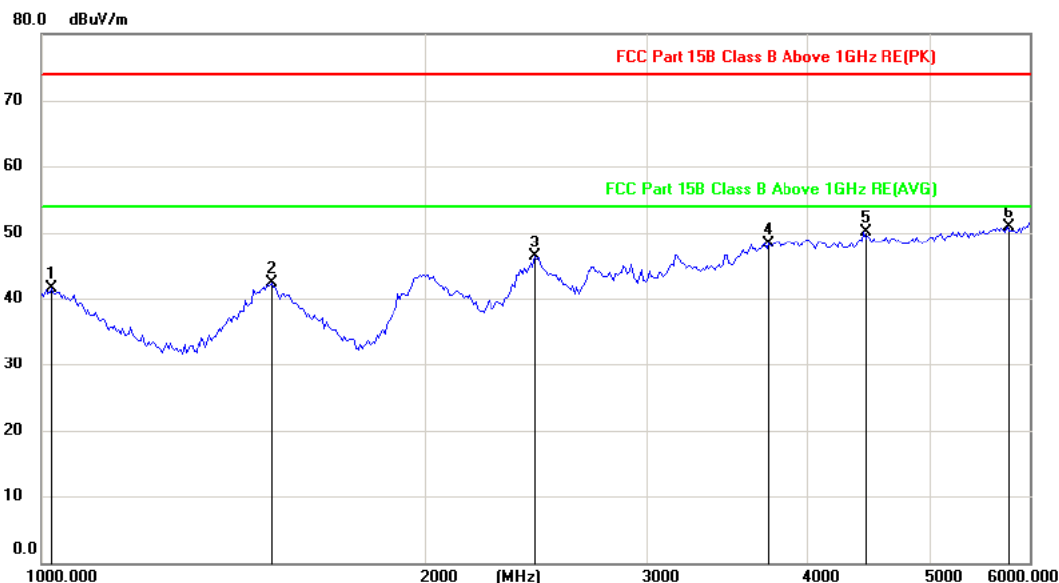

Site: Polarization: **Horizontal** Temperature: 25
 Limit: FCC Part 15B Class B Above 1GHz RE(PK) Power: Humidity: 55 %
 Mode: Charging and Data Transmitting
 Note: DC 5V(PC Input AC 120V/60Hz)

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		1018.115	54.16	-12.63	41.53	74.00	-32.47	peak		
2		1516.676	54.15	-11.77	42.38	74.00	-31.62	peak		
3		2445.096	53.54	-7.17	46.37	74.00	-27.63	peak		
4		3735.146	49.44	-1.16	48.28	74.00	-25.72	peak		
5		4437.720	47.10	3.01	50.11	74.00	-23.89	peak		
6	*	5767.633	42.41	8.43	50.84	74.00	-23.16	peak		

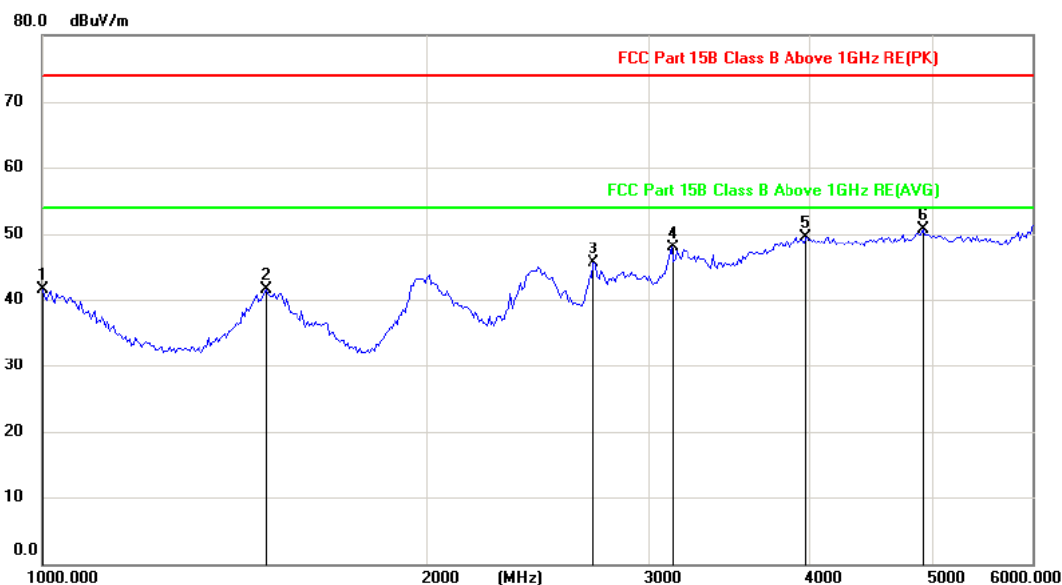

Site: Polarization: **Vertical** Temperature: 25
 Limit: FCC Part 15B Class B Above 1GHz RE(PK) Power: Humidity: 55 %
 Mode: Charging and Data Transmitting
 Note: DC 5V(PC Input AC 120V/60Hz)


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		1000.000	54.12	-12.67	41.45	74.00	-32.55	peak		
2		1500.426	53.21	-11.75	41.46	74.00	-32.54	peak		
3		2713.433	51.91	-6.49	45.42	74.00	-28.58	peak		
4		3121.308	53.56	-5.57	47.99	74.00	-26.01	peak		
5		3984.531	47.30	2.14	49.44	74.00	-24.56	peak		
6	*	4924.737	45.77	4.97	50.74	74.00	-23.26	peak		


8. Photographs of Test Configuration

Conducted Emission Test View



Radiated Emission Test View

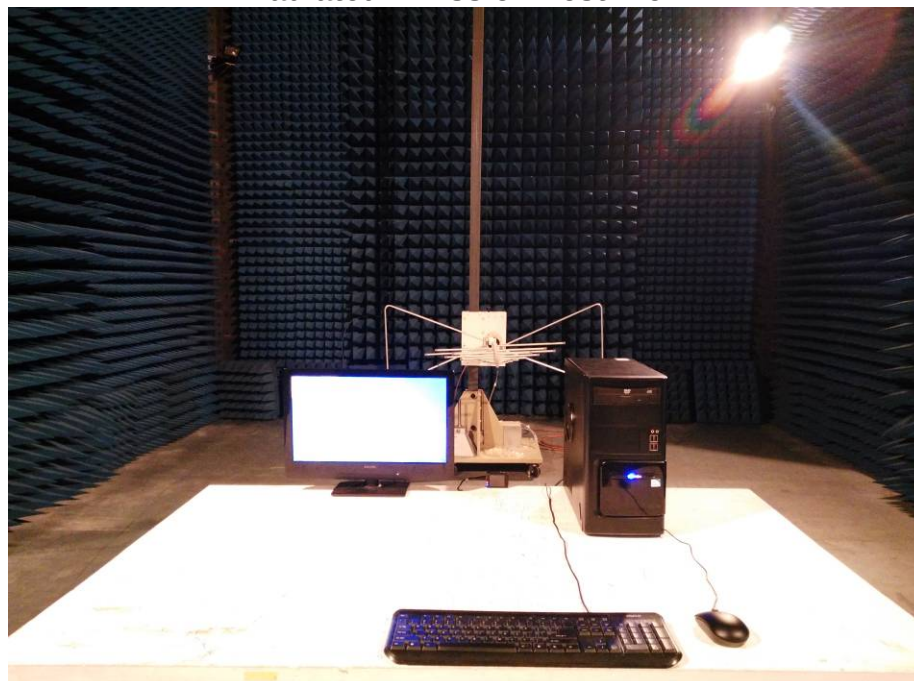

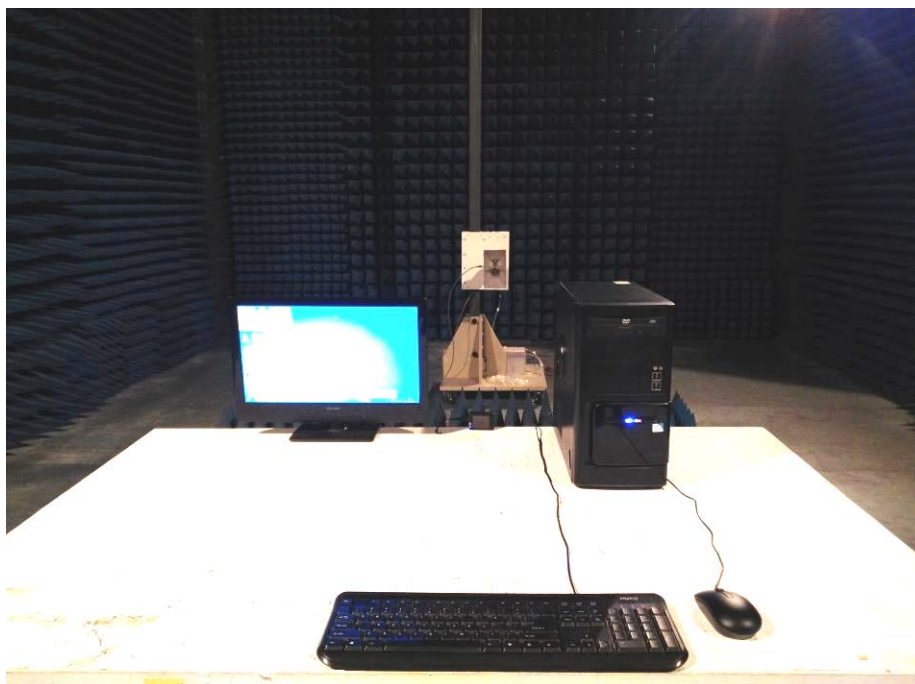

9. Photographs of EUT

















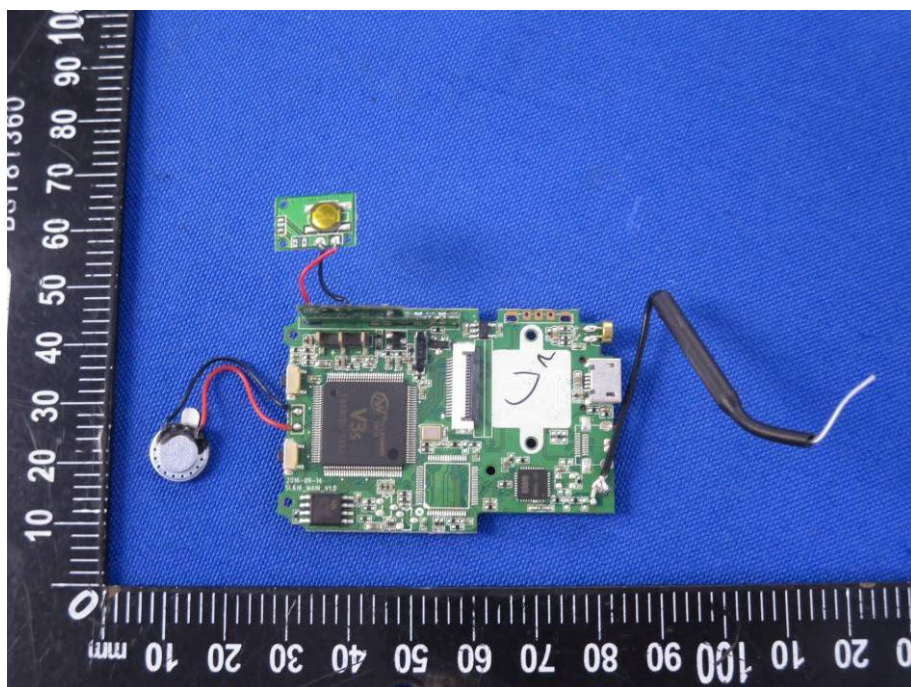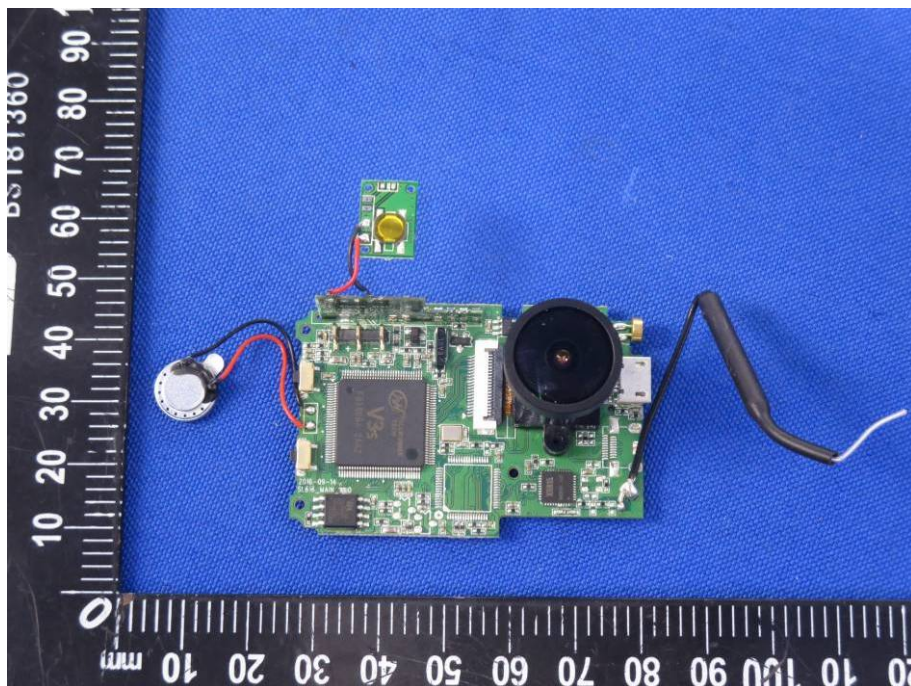

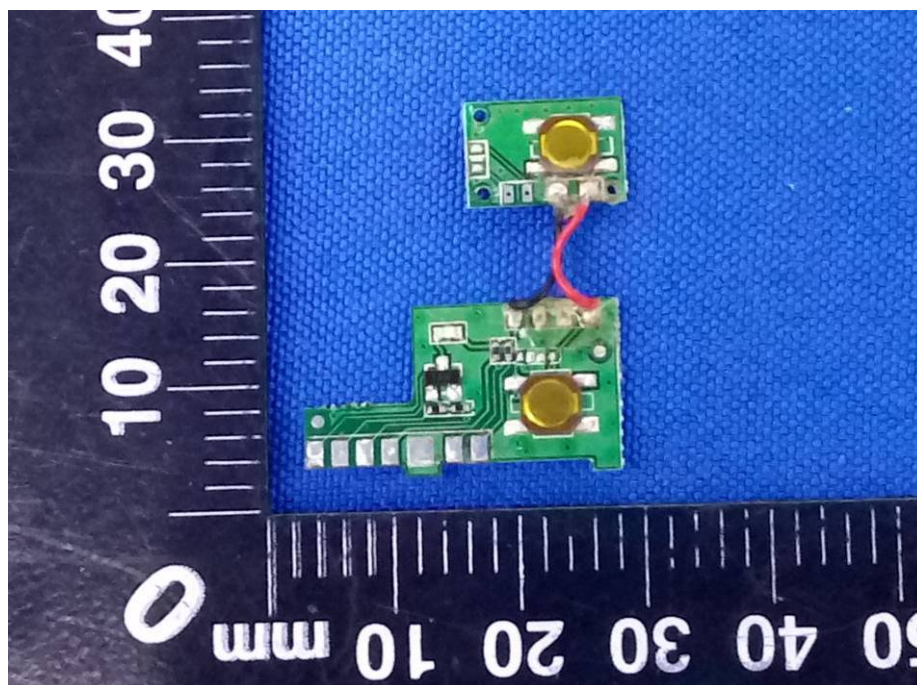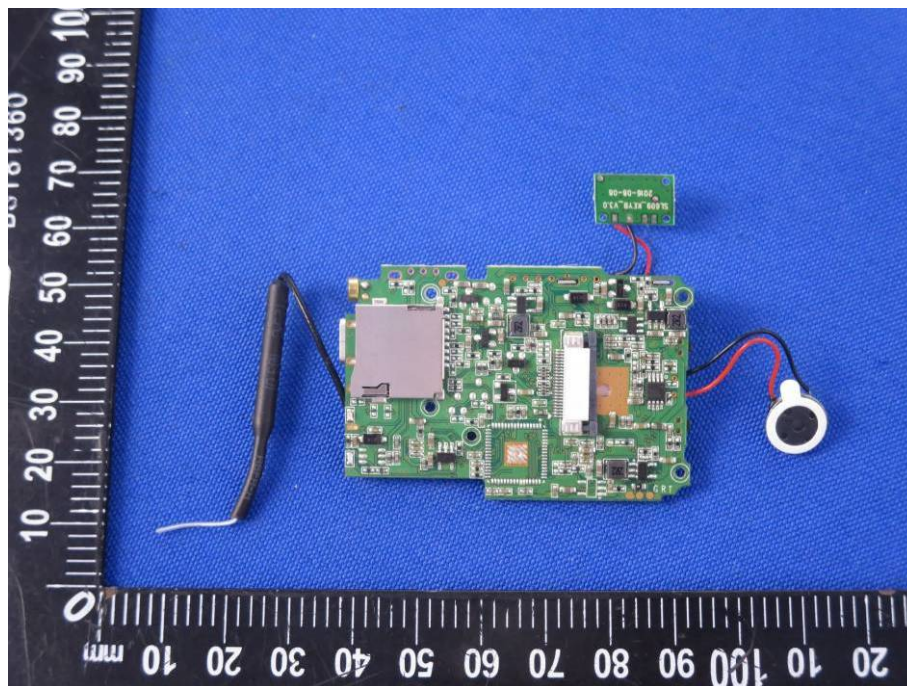

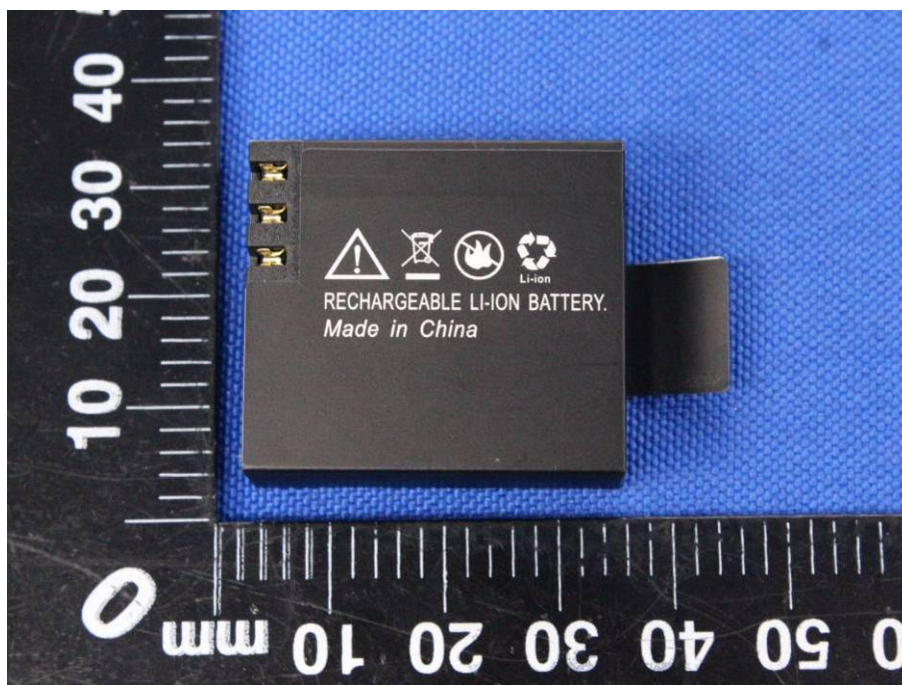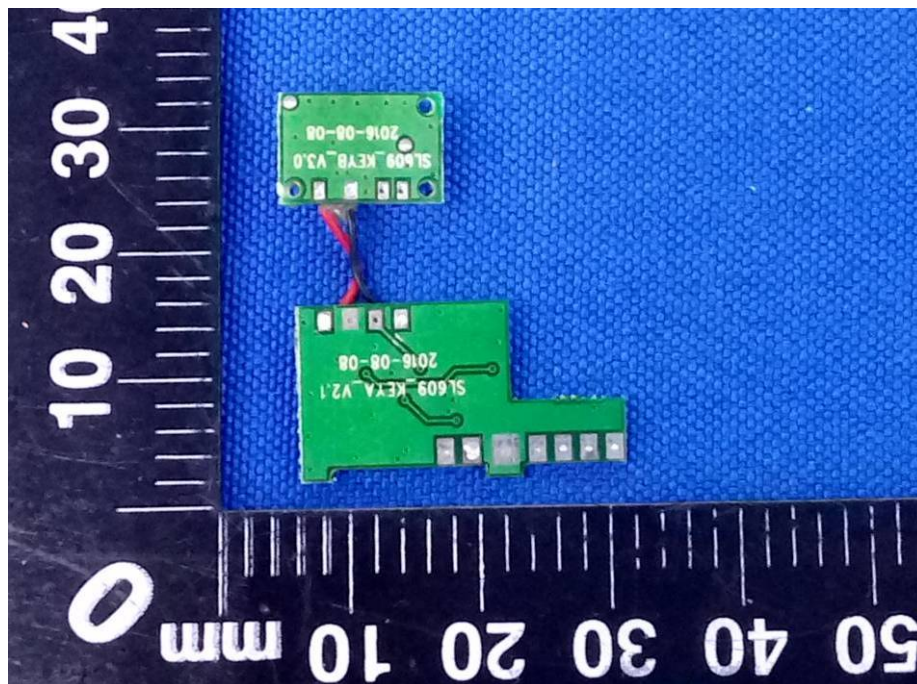



*****END OF REPORT*****