



849 NW STATE ROAD 45  
NEWBERRY, FL 32669 USA  
PH: 888.472.2424 OR 352.472.5500  
FAX: 352.472.2030  
EMAIL: [INFO@TIMCOENGR.COM](mailto:INFO@TIMCOENGR.COM)  
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

## FCC PART 95 AND IC RSS-210 FRS/GMRS TRANSCEIVER TEST REPORT

APPLICANT	COBRA ELECTRONICS CORPORATION
	6500 WEST CORTLAND STREET CHICAGO IL 60707 USA
FCC ID	BBOCXR900
IC CERT #	906B-CXR900
MODEL NUMBERS	CXR900, CXR925, CXR950, CXR955, CXR956
PRODUCT DESCRIPTION	FRS/GMRS TRANSCEIVER
DATE SAMPLE RECEIVED	7/7/2008
DATE TESTED	7/29/2008
TESTED BY	Nam Nguyen
APPROVED BY	Mario de Arenzeta
TIMCO REPORT NO.	1478AUT8TestReport.doc
TEST RESULTS	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL  
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**



Certificate # 0955-01



TABLE OF CONTENTS

STATEMENT OF COMPLIANCE..... 3  
GENERAL INFORMATION ..... 4  
TEST PROCEDURES ..... 5  
RF POWER OUTPUT ..... 6  
MODULATION CHARACTERISTICS..... 7  
EMISSION DESIGNATOR AND FREQUENCIES ..... 10  
OCCUPIED BANDWIDTH ..... 11  
SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)..... 13  
FIELD STRENGTH OF SPURIOUS EMISSIONS - TX ..... 14  
FIELD STRENGTH OF SPURIOUS EMISSIONS - RX ..... 16  
FREQUENCY STABILITY..... 18  
TEST EQUIPMENT LIST..... 19

**STATEMENT OF COMPLIANCE**

This equipment has been tested in accordance with the standards identified in the referenced test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report and demonstrate that the equipment complies with the appropriate standards. No modifications were made to the equipment during testing in order to demonstrate compliance with these standards.

I attest that the necessary measurements were made by me or under my supervision, at Timco Engineering, Inc. located at 849 N.W. State Road 45, Newberry, Florida 32669 USA.

**Authorized by:** Mario de Aranzeta



**Signature:**

**Function:** Engineer

**Date:** 7/31/2008

**GENERAL INFORMATION**

**DUT Specification**

The test results relate only to the items tested.	
<b>DUT Description</b>	FRS/GMRS TRANSCEIVER
<b>FCC ID</b>	BBOCXR900
<b>IC Cert #</b>	906B-CXR900
<b>Model Number</b>	CXR900, CXR925, CXR950, CXR955, CXR956
<b>Operating Frequency</b>	462.5500-462.7250, 462.5625-467.7125
<b>No. of Channels</b>	22
<b>Type of Emission</b>	10K5F3E
<b>Modulation</b>	FM
<b>DUT Power Source</b>	<input type="checkbox"/> 110-120Vac/50- 60Hz
	<input type="checkbox"/> DC Power
	<input checked="" type="checkbox"/> Battery Operated Exclusively
<b>Test Item</b>	<input type="checkbox"/> Prototype
	<input checked="" type="checkbox"/> Pre-Production
	<input type="checkbox"/> Production
<b>Type of Equipment</b>	<input type="checkbox"/> Fixed
	<input type="checkbox"/> Mobile
	<input checked="" type="checkbox"/> Portable
<b>Antenna</b>	Fixed
<b>Test Facility</b>	Timco Engineering Inc. located at 849 NW State Road 45 Newberry, FL 32669 USA.
<b>Modifications</b>	None
<b>Test Exercise</b>	The DUT was placed in continuous transmit mode of operation
<b>Applicable Standards</b>	ANSI/TIA 603:2004 , FCC CFR 47 Part 2 and Part 95,



## TEST PROCEDURES

**Bandwidth:** The measurements were made with the spectrum analyzer's resolution bandwidth (RBW) = 1 MHz and the video bandwidth (VBW) = 3 MHz and the span set as shown on plot.

**Power Output:** RF power was conducted per ANSI/TIA 603-C:2004 using the substitution method

**Antenna Conducted Emissions:** The RBW = 100 kHz, VBW = 300 kHz and the span set to 10.0 MHz and the spectrum was scanned from 30 MHz to the 10<sup>th</sup> Harmonic of the fundamental. Above 1 GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz.

**Radiation Interference:** The test procedure used was ANSI/TIA 603-C:2004 using an Agilent spectrum receiver with pre-selector. The bandwidth (RBW) of the spectrum TIA 603 receiver was 100 kHz up to 1 GHz and 1 MHz above 1 GHz with an appropriate sweep speed. The VBW above 1 GHz was 3 MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the DUT was 76°F with a humidity of 55%.

**RF POWER OUTPUT**


**Rule Part No.:** 2.1033(c)(6)(7), 2.1046(a), Part 95, RSS-210

**Requirements:** Power output shall not exceed 0.50 Watts effective radiated power for the FRS channels. There can be no provisions for increasing the power or varying the power. No GMRS channel, under any condition of modulation, shall exceed:

1. 50W Carrier power (average TP during one modulated RF cycle) when transmitting emissions type A1D, F1D, G1D, A3E, F3E, or G3E.
2. 50W peak envelope TP when transmitting emission type H1D, J1D, R1D, H3E, J3E, or R3E.

**Method of Measurement:** RF power is measured as ERP as the antenna is permanently attached. The substitution method was used. With a nominal battery voltage, and the transmitter properly adjusted the RF output measures:

**Test Setup Diagram:**

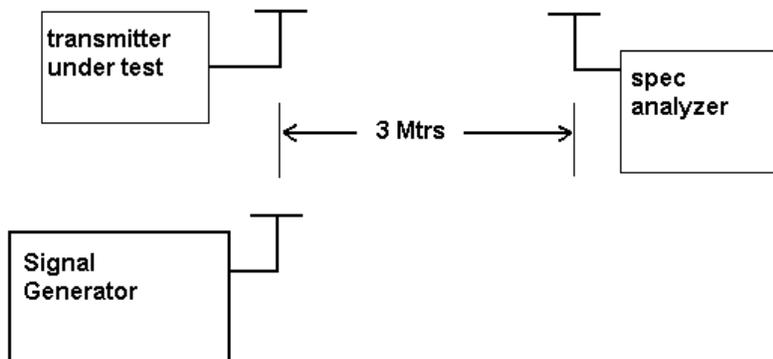

**Test Data:**

OUTPUT POWER: GMRS: 2.24 Watts  
FRS: 0.49 Watts

**Rule Part No.: 2.1033 (C)(8) DC Input into the final amplifier**

FOR LOW POWER SETTING INPUT POWER:  $(7.4V)(.200A) = 1.48$  Watts  
FOR HIGH POWER SETTING INPUT POWER:  $(7.4V)(.720A) = 5.33$  Watts

Applicant: COBRA ELECTRONICS CORPORATION  
FCC ID: BBOCX900  
IC Cert #: 906B-CXR900  
Report: C\COBRA\1478AUT8\1478AUT8TestReport.doc

**MODULATION CHARACTERISTICS**


**Rule Part No.:** Part 2.1047(a)(b)

**Test Requirements:**

**Method of Measurement:**


The audio frequency response was measured in accordance with ANSI/TIA 603-C:2004. The audio frequency response curve is shown below. The audio signal was fed into a dummy microphone circuit and into the microphone connector. The input required to produce 30 percent modulation level was measured.

**AUDIO FREQUENCY RESPONSE PLOT**

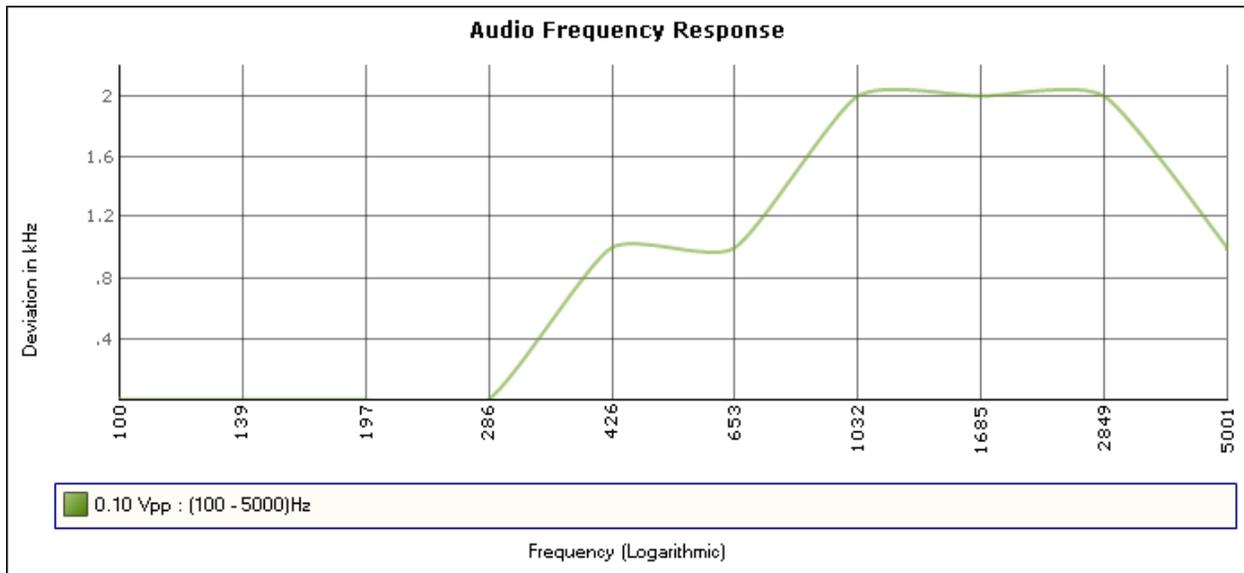


### Audio input versus modulation

The audio input level needed for a particular percentage of modulation was measured in accordance with ANSI/TIA 603-C:2004. Curves are provided for audio input frequencies of 300, 1000, and 2500 Hz. See the plot below..

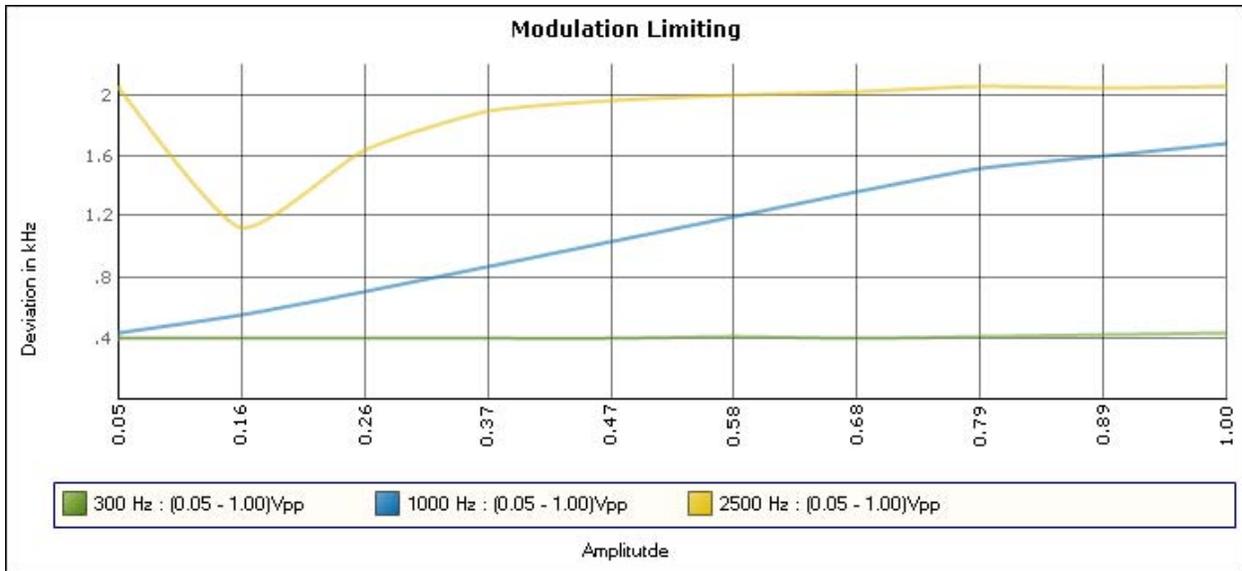

### Post Limiter Filter

Each GMRS transmitter, except a mobile station transmitter with a power of 2.5Watts or less, must be equipped with an audio low pass filter. At any frequency between 3 & 20 kHz the filter must have an attenuation of  $60\log(f/3)$  greater than the attenuation at 1 kHz. See below.

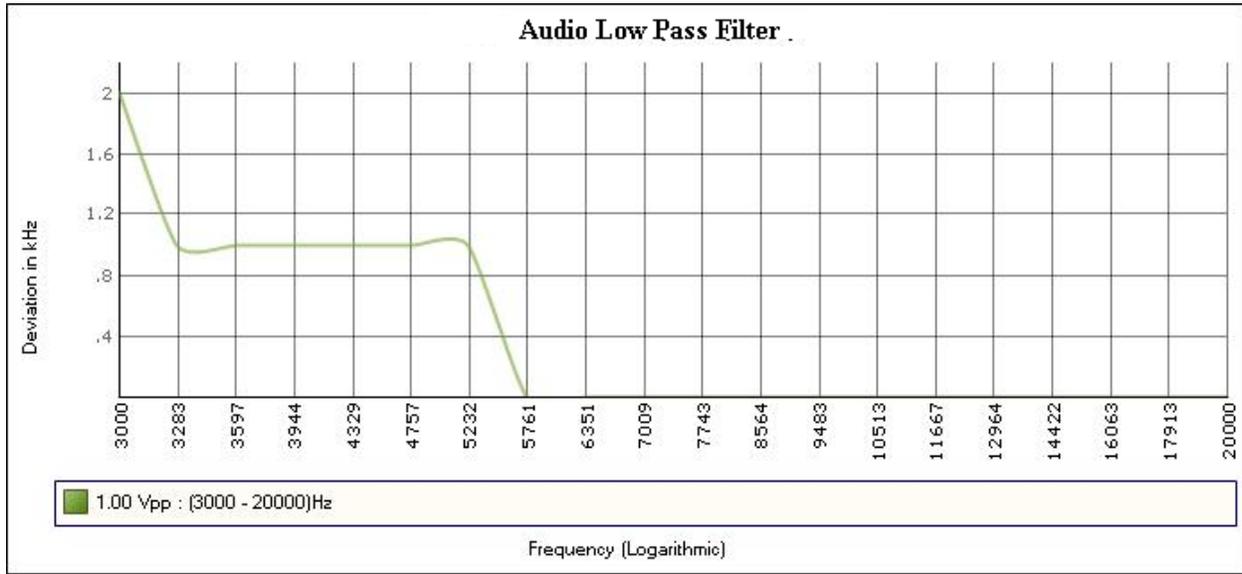



**EMISSION DESIGNATOR AND FREQUENCIES**

2.1033(c) (4)            Type of Emission:    10K5F3E  
95.631

$$\begin{aligned} B_n &= 2M + 2DK \\ M &= 3000 \\ D &= 2.25K \\ B_n &= 2(3000)+2(2250) = 10.5K \end{aligned}$$

GMRS Authorized Bandwidth    20.0 kHz

2.1033(c)(5) GMRS Frequency Range:  
95.621

- |              |              |
|--------------|--------------|
| 1. 462.5500  | 13. 462.7000 |
| 2. 462.5625  | 14. 462.7125 |
| 3. 462.5750  | 15. 462.7250 |
| 4. 462.5875  |              |
| 5. 462.6000  |              |
| 6. 462.6125  |              |
| 7. 462.6250  |              |
| 8. 462.6375  |              |
| 9. 462.6500  |              |
| 10. 462.6625 |              |
| 11. 462.6750 |              |
| 12. 462.6875 |              |

FRS Authorized Bandwidth    12.5KHz

2.1033(c)(5) FRS Frequency Range:  
95.627

- |             |                  |
|-------------|------------------|
| 1. 462.5625 | 8. 467.5625      |
| 2. 462.5875 | 9. 467.5875      |
| 3. 462.6125 | 10. 467.6125     |
| 4. 462.6375 | 11. 467.6375     |
| 5. 462.6625 | 12. 467.6625     |
| 6. 462.6875 | 13. 467.6875     |
| 7. 462.7125 | 14. 467.7125 MHz |

**OCCUPIED BANDWIDTH**

**Part 2.1049(c)**      EMISSION BANDWIDTH:  
 95.635(b)(1)(3)(7)


At least 25dB on any frequency removed from the center of the authorized bandwidth than 50% up to and including 100% of the authorized bandwidth. At least 35 dB on any frequency removed from the center of the authorized BW by more than 100% up to and including 250% of the authorized BW. At least 43+log10(TP) dB on any frequency removed from the center of the authorized bandwidth by more than 250%. See the following plot.

**Test procedure:** ANSI/TIA 603-C:2004 para 2.2.11.

Test procedure diagram

**OCCUPIED BANDWIDTH MEASUREMENT**


Occupied BW Test Equipment Setup

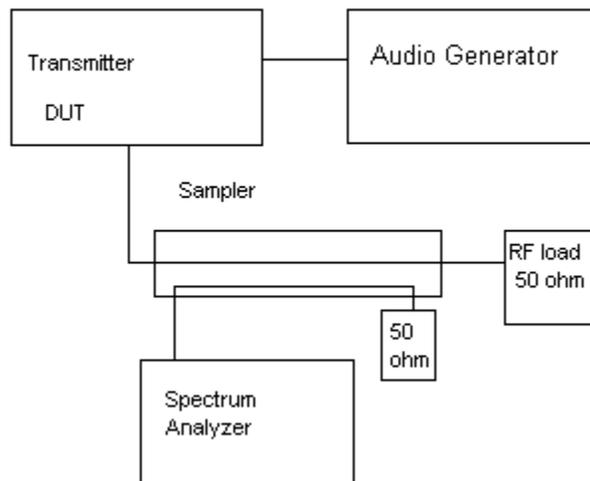

**NOTES:**

COBRA ELECTRONICS CORPORATION - FCC ID: BBOCX900  
 OCCUPIED BANDWIDTH PLOT

**FCC 95.635 Mask (1) (3) (7)**

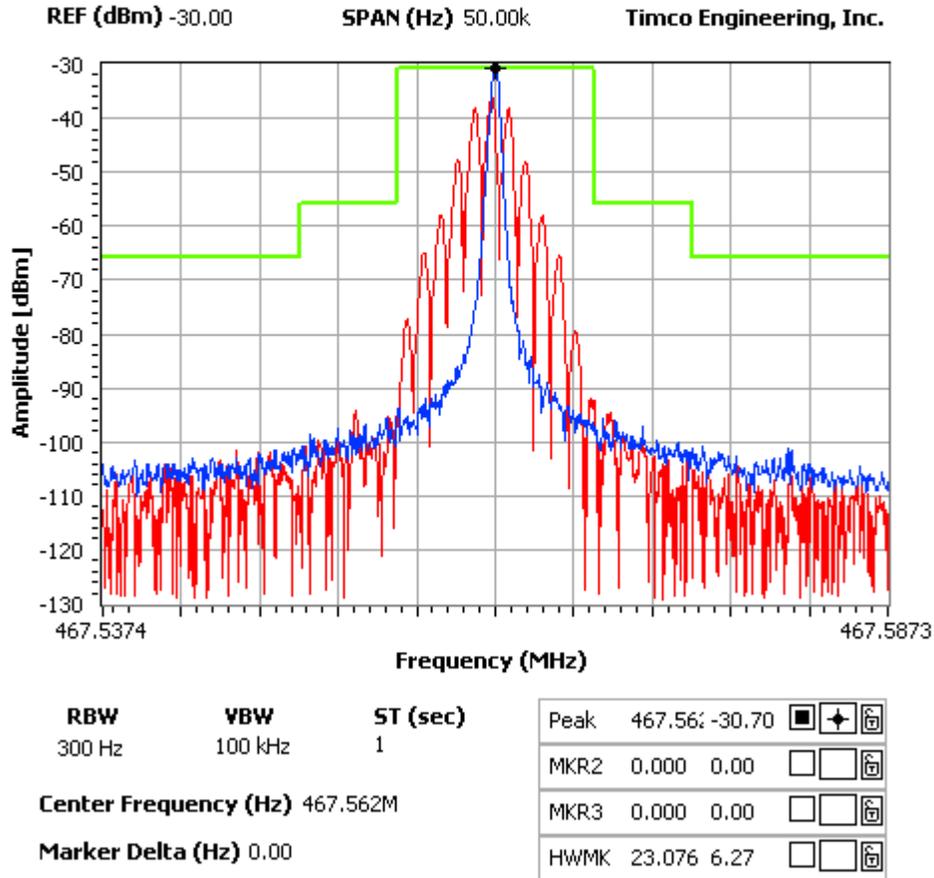

Applicant: COBRA ELECTRONICS CORPORATION  
 FCC ID: BBOCX900  
 IC Cert #: 906B-CXR900  
 Report: C\COBRA\1478AUT8\1478AUT8TestReport.doc



**SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)**

2.1051 Not applicable, no antenna terminal allowed.


**FIELD STRENGTH OF SPURIOUS EMISSIONS - TX**

**Rule Parts. No.:** Part 2.1053  
95.635(b)(7)

**Requirements:** GMRS:  $43 + 10\log(2.24) = 46.50$  dB

**METHOD OF MEASUREMENT:** The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per ANSI/TIA 603-C:2004 using the substitution method. Measurements were made at the test site of TIMCO ENGINEERING, INC. located at 849 NW State Road 45, Newberry, FL 32669.

**Test Setup Diagram:**

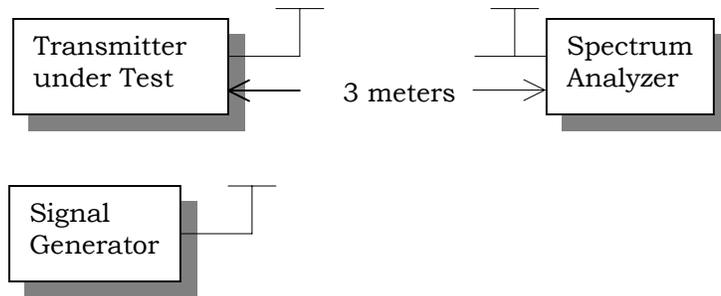

**Test Data (GMRS):**

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
462.73	V	0.00
925.45	V	61.85
1388.18	V	70.90
1850.90	V	77.64
2313.63	V	73.30
2776.35	V	70.43
3239.08	V	65.41
3701.80	V	71.65
4164.53	V	78.94
4627.25	V	78.30



**Rule Parts. No.:** Part 2.1053  
95.635(b)(7)

**Requirements:** FRS :  $43 + 10\log(.49) = 39.88$  dB

**Test Data (FRS):**

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
467.56	V	0
935.13	V	58.65
1402.69	V	70.52
1870.25	V	66.11
2337.81	V	63.1
2805.38	V	66.79
3272.94	V	63.47
3740.50	V	70.03
4208.06	V	74.25
4675.63	V	68.54

Applicant: COBRA ELECTRONICS CORPORATION  
FCC ID: BBOCXR900  
IC Cert #: 906B-CXR900  
Report: C\COBRA\1478AUT8\1478AUT8TestReport.doc

## FIELD STRENGTH OF SPURIOUS EMISSIONS - RX

**Rules Part No.:** 15.109, - RSS-210, RSS-310

**Requirements:**

Frequency	Limits
30 – 88	40.0 dB $\mu$ V/m measured @ 3 meters
80 – 216	43.5 dB $\mu$ V/m measured @ 3 meters
216 – 960	46.0 dB $\mu$ V/m measured @ 3 meters
Above 960	54.0 dB $\mu$ V/m measured @ 3 meters

**Test Procedure:** The procedure used was ANSI C63.4-2003. The frequency was scanned from 30 MHz to 1.0 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. The DUT was measured in three (3) orthogonal planes.

**Test Data:**

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Pol	Coax Loss dB	Correction Factor dB/m	Field Strength dBuV/m	Margin dB
163.3	141.58	5.7	V	0.69	13.19	19.58	23.92
163.3	141.58	11.2	H	0.69	13.16	25.05	18.45
163.3	283.16	3.5	V	1.07	13.69	18.26	27.74
163.3	283.16	4.2	H	1.07	13.86	19.13	26.87
163.3	424.74	4.4	V	1.22	16.05	21.67	24.33
163.3	424.74	4.6	H	1.22	16.34	22.16	23.84
163.3	566.32	4.1	V	1.50	18.16	23.76	22.24
163.3	566.32	4.5	H	1.50	18.74	24.74	21.26
163.3	707.90	4.6	V	1.72	20.52	26.84	19.16
163.3	707.90	5.2	H	1.72	21.00	27.92	18.08
462.7	441.03	4.1	H	1.24	16.81	22.15	23.85
462.7	441.03	9.1	V	1.24	16.33	26.67	19.33
462.7	882.06	3.7	H	1.94	23.30	28.94	17.06
462.7	882.06	4.8	V	1.94	22.44	29.18	16.82
462.7	1,323.09	9.3	V	2.36	27.86	39.52	14.48
462.7	1,323.09	9.5	H	2.36	27.86	39.72	14.28
462.7	1,764.12	8.0	V	2.71	29.69	40.40	13.60
462.7	1,764.12	8.3	H	2.71	29.69	40.70	13.30
462.7	2,205.15	7.8	V	3.04	31.73	42.57	11.43
462.7	2,205.15	8.1	H	3.04	31.73	42.87	11.13
467.6	445.86	4.4	H	1.25	16.86	22.51	23.49
467.6	445.86	10.0	V	1.25	16.48	27.73	18.27

Applicant: COBRA ELECTRONICS CORPORATION  
 FCC ID: BBOCXR900  
 IC Cert #: 906B-CXR900  
 Report: C\COBRA\1478AUT8\1478AUT8TestReport.doc

**TEST DATA CONTD.**

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Pol	Coax Loss dB	Correction Factor dB/m	Field Strength dBuV/m	Margin dB
467.6	891.72	3.9	H	1.95	23.30	29.15	16.85
467.6	891.72	4.2	V	1.95	22.62	28.77	17.23
467.6	1,337.58	9.7	H	2.37	27.87	39.94	14.06
467.6	1,337.58	9.8	V	2.37	27.87	40.04	13.96
467.6	1,783.44	8.3	V	2.73	29.81	40.84	13.16
467.6	1,783.44	9.0	H	2.73	29.81	41.54	12.46
467.6	2,229.30	7.7	H	3.06	31.80	42.56	11.44
467.6	2,229.30	8.2	V	3.06	31.80	43.06	10.94



**FREQUENCY STABILITY**

**Rule Parts. No.:** Part 2.1055, Part 95.621(b), RSS-210

**Requirements:** )Temperature and voltage tests were performed to verify that the frequency remains within the 0.0005%, 5 ppm specification limit. The test was conducted as follows: The transmitter was placed in the temperature chamber at 25° C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30° C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50° C.

**Method of Measurements:** TIA/EIA 603.

**Test Data:**

<b>Assigned Frequency (Ref. Frequency) (MHz)</b>		<b>462.725096</b>
<b>Temperature (°C)</b>	<b>Frequency (MHz)</b>	<b>Frequency Stability (PPM)</b>
REFERENCE		
-30	<b>462.723319</b>	-3.41
-20	<b>462.724718</b>	-0.82
-10	<b>462.725325</b>	0.49
0	<b>462.725582</b>	1.05
+10	<b>462.725453</b>	0.77
+20	<b>462.725230</b>	0.29
+30	<b>462.724527</b>	-1.23
+40	<b>462.724357</b>	-1.60
+50	<b>462.724269</b>	-1.79

<b>Assigned Frequency (Ref. Frequency) (MHz)</b>		
<b>% Battery</b>	<b>Frequency (MHz)</b>	<b>Frequency Stability (PPM)</b>
-15%	<b>462.725009</b>	-0.19
0	<b>462.725096</b>	0
+15%	<b>462.725502</b>	0.88

Note: This EUT meets the frequency stability requirement for a FRS: +/- 2.5ppm over temp range of -20 degrees C to +50 degrees C. It also meets the GMRS frequency stability requirements: +/- 5ppm over the temp range -30 degrees C to +50 degrees C.

Applicant: COBRA ELECTRONICS CORPORATION  
 FCC ID: BBOCXR900  
 IC Cert #: 906B-CXR900  
 Report: C\COBRA\1478AUT8\1478AUT8TestReport.doc

### TEST EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3/10-Meter OATS	TEI	N/A	N/A	Listed 3/20/07	3/19/10
3-Meter OATS	TEI	N/A	N/A	Listed 1/11/06	1/10/09
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	Listed 5/11/07	5/11/10
AC Voltmeter	HP	400FL	2213A14499	CAL 12/29/06	12/29/08
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 11/30/07	11/30/09
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 11/30/07	11/30/09
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 11/30/07	11/30/09
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	CAL 11/30/07	11/30/09
Coaxial Cable #64	Semflex Inc.	60637	Timco #64	CHAR 3/30/07	3/30/09
Antenna: Dipole Kit	Electro-Metrics	TDA-30/1-4	152	CAL 3/3/06	3/3/09
Antenna: Dipole Kit	Electro-Metrics	TDA-30/1-4	153	CHAR 4/5/06	4/5/09
Frequency Counter	HP	5385A	2730A03025	CAL 7/6/07	7/6/09
Hygro-Thermometer	Extech	445703	0602	CAL 11/15/07	11/15/09
Antenna: Log-Periodic	Electro-Metrics	LPA-25	1122	CAL 12/1/06	12/1/08
Measuring Tape-7.5M	Kraftixx	7.5M PROFI		CHAR 11/13/07	11/13/09
Modulation Analyzer	HP	8901A	3435A06868	CAL 5/9/07	5/9/09
Digital Multimeter	Fluke	FLUKE-77-3	79510405	CAL 5/14/07	5/14/09
System One	Audio Precision	System One	SYS1-45868	CHAR 2/27/08	2/27/10
Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 4/25/08	4/25/10

Applicant: COBRA ELECTRONICS CORPORATION  
 FCC ID: BBOCX900  
 IC Cert #: 906B-CXR900  
 Report: C\COBRA\1478AUT8\1478AUT8TestReport.doc