

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

<b>SAR TEST REPORT</b>				
<b>RF EXPOSURE EVALUATION</b>		<b>SPECIFIC ABSORPTION RATE</b>		
<b>APPLICANT</b>	<b>COBRA ELECTRONICS CORPORATION</b>			
<b>PRODUCT</b>	<b>PORTABLE FRS/GMRS PTT RADIO TRANSCEIVER</b>			
<b>MODEL(S)</b>	<b>LI5590 / LI5600 / LI5625 / LI5650 / LI5675</b>			
<b>IDENTIFIER(S)</b>	<b>FCC ID:</b>	<b>BBOLI5600</b>	<b>IC:</b>	<b>906B-LI5600</b>
<b>APPLICATION TYPE</b>	<b>Certification</b>			
<b>STANDARD(S) APPLIED</b>	<b>FCC 47 CFR §2.1093</b>			
	<b>Health Canada Safety Code 6</b>			
<b>PROCEDURE(S) APPLIED</b>	<b>FCC OET Bulletin 65, Supplement C (01-01)</b>			
	<b>Industry Canada RSS-102 Issue 2</b>			
<b>RF EXPOSURE CATEGORY</b>	<b>General Population / Uncontrolled</b>			
<b>RF EXPOSURE EVALUATION(S)</b>	<b>Face-held &amp; Body-worn</b>			
<b>TEST REPORT SERIAL NO.</b>	<b>100907BBO-T858-S95U</b>			
<b>TEST REPORT REVISION NO.</b>	<b>Revision 1.0 (Initial Release)</b>			
<b>TEST REPORT ISSUE DATE</b>	<b>October 15, 2007</b>			
<b>TEST REPORT SIGNATORIES</b>	<b>Testing By</b>	<b>Report By</b>	<b>Reviewed By</b>	
	<b>Sean Johnston Celltech Labs Inc.</b>	<b>Cheri Frangiadakis Celltech Labs Inc.</b>	<b>Jonathan Hughes Celltech Labs Inc.</b>	
<b>TEST LAB AND LOCATION</b>	<b>Celltech Compliance Testing and Engineering Lab</b>			
	<b>21-364 Lougheed Road, Kelowna, B.C. V1X 7R8 Canada</b>			
<b>TEST LAB CONTACT INFO.</b>	<b>Tel.: 250-765-7650</b>		<b>Fax: 250-765-7645</b>	
	<b>info@celltechlabs.com</b>		<b>www.celltechlabs.com</b>	
<b>TEST LAB ACCREDITATION(S)</b>	  <b>Certificate No. 2470.01</b>			

<b>Company:</b>	<b>Cobra Electronics Corporation</b>	<b>FCC ID:</b>	<b>BBOLI5600</b>	<b>IC ID:</b>	<b>906B-LI5600</b>	
<b>Model(s):</b>	<b>LI5590/LI5600/LI5625/LI5650/LI5675</b>	<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>				
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 1 of 33

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

## DECLARATION OF COMPLIANCE SAR RF EXPOSURE EVALUATION

<b>Test Lab Information</b>	<b>Name</b>	<b>CELLTECH LABS INC.</b>					
	<b>Address</b>	21-364 Lougheed Road, Kelowna, B.C. V1X 7R8 Canada					
<b>Company Information</b>	<b>Name</b>	<b>COBRA ELECTRONICS CORPORATION</b>					
	<b>Address</b>	6500 West Cortland Street, Chicago, IL 60707 United States					
<b>Standard(s) Applied</b>	<b>FCC</b>	47 CFR §2.1093					
	<b>IC</b>	Health Canada Safety Code 6					
<b>Procedure(s) Applied</b>	<b>FCC</b>	OET Bulletin 65, Supplement C (Edition 01-01)					
	<b>IC</b>	RSS-102 Issue 2					
<b>Device RF Exposure Category</b>	<b>Portable</b>	General Population / Uncontrolled Environment					
<b>Device Identifier(s)</b>	<b>FCC ID:</b>	BBOLI5600					
	<b>IC:</b>	906B-LI5600					
	<b>Model(s)</b>	LI5590 / LI5600 / LI5625 / LI5650 / LI5675					
	<b>Serial No.</b>	0083407 (Identical Prototype)					
<b>Device Description</b>	Portable FM UHF FRS/GMRS PTT Radio Transceiver						
<b>Transmit Frequency Range(s)</b>	462.5500 - 462.7250 MHz (GMRS Channels 15-22)						
	462.5625 - 462.7125 MHz (FRS/GMRS Channels 1-7)						
	467.5625 - 467.7125 MHz (FRS Channels 8-14)						
<b>Max. RF Output Power Tested</b>	610 mW	27.85 dBm	ERP	462.7250 MHz	GMRS Ch. 22		
<b>Antenna Type(s) Tested</b>	External Fixed Stubby (Non-detachable)						
<b>Battery Type(s) Tested</b>	Lithium-ion	7.4 V			650 mAh		
<b>Body-worn Accessories Tested</b>	Plastic Belt-Clip (4 mm thickness)						
<b>Audio Accessories Connected</b>	Ear-bud with Lapel-Microphone (P/N: GA-EBM2)						
<b>Max. SAR Level(s) Evaluated</b>	Face-held	<b>1.10 W/kg</b>	1g	50% duty cycle	<b>ANSI/IEEE Limit</b>	1.6 W/kg	1g
	Body-worn	<b>1.12 W/kg</b>	1g	50% duty cycle	<b>ANSI/IEEE Limit</b>	1.6 W/kg	1g

Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada's Safety Code 6 for the General Population / Uncontrolled Exposure environment. The device was tested in accordance with the measurement standards and procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01) and Industry Canada RSS-102 Issue 2. All measurements were performed in accordance with the SAR system manufacturer recommendations.

I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc. The results and statements contained in this report pertain only to the device(s) evaluated.

<b>Test Report Approved By</b>		
	<b>Sean Johnston</b>	<b>Celltech Labs Inc.</b>



<b>Company:</b>	<b>Cobra Electronics Corporation</b>	<b>FCC ID:</b>	<b>BBOLI5600</b>	<b>IC ID:</b>	<b>906B-LI5600</b>	
<b>Model(s):</b>	<b>LI5590/LI5600/LI5625/LI5650/LI5675</b>	<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>				
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 2 of 33

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	 
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

<b>TABLE OF CONTENTS</b>	
<b>1.0 INTRODUCTION</b>	<b>4</b>
<b>2.0 SAR MEASUREMENT SYSTEM</b>	<b>4</b>
<b>3.0 MEASUREMENT SUMMARY</b>	<b>5</b>
<b>4.0 DETAILS OF SAR EVALUATION</b>	<b>6</b>
<b>5.0 EVALUATION PROCEDURES</b>	<b>6</b>
<b>6.0 SYSTEM PERFORMANCE CHECK</b>	<b>7</b>
<b>7.0 SIMULATED EQUIVALENT TISSUES</b>	<b>8</b>
<b>8.0 SAR SAFETY LIMITS</b>	<b>8</b>
<b>9.0 ROBOT SYSTEM SPECIFICATIONS</b>	<b>9</b>
<b>10.0 PROBE SPECIFICATION (ET3DV6)</b>	<b>10</b>
<b>11.0 SIDE PLANAR PHANTOM</b>	<b>10</b>
<b>12.0 VALIDATION PLANAR PHANTOM</b>	<b>10</b>
<b>13.0 DEVICE HOLDER</b>	<b>10</b>
<b>14.0 TEST EQUIPMENT LIST</b>	<b>11</b>
<b>15.0 MEASUREMENT UNCERTAINTIES</b>	<b>12</b>
<b>MEASUREMENT UNCERTAINTIES (CONT.)</b>	<b>13</b>
<b>16.0 REFERENCES</b>	<b>14</b>
<b>APPENDIX A - SAR MEASUREMENT DATA</b>	<b>15</b>
<b>APPENDIX B - SYSTEM PERFORMANCE CHECK DATA</b>	<b>20</b>
<b>APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS</b>	<b>23</b>
<b>APPENDIX D - SAR TEST SETUP &amp; DUT PHOTOGRAPHS</b>	<b>26</b>
<b>APPENDIX E - SYSTEM VALIDATION</b>	<b>32</b>
<b>APPENDIX F - PROBE CALIBRATION</b>	<b>33</b>

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

## 1.0 INTRODUCTION

This measurement report demonstrates compliance of the Cobra Electronics Corporation Model(s): LI5590 / LI5600 / LI5625 / LI5650 / LI5675 Portable FM UHF FRS/GMRS PTT Radio Transceiver with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]) and Health Canada's Safety Code 6 (see reference [2]) for the General Population / Uncontrolled Exposure environment. The test procedures described in FCC OET Bulletin 65, Supplement C (Edition 01-01) (see reference [3]) and IC RSS-102 Issue 2 (see reference [4]) were employed. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used, and the provisions of the rules are included within this test report.

## 2.0 SAR MEASUREMENT SYSTEM

Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for brain and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.



DASY4 SAR System with Plexiglas validation phantom



DASY4 SAR System with Plexiglas side planar phantom

Company:	Cobra Electronics Corporation	FCC ID:	BBOLI5600	IC ID:	906B-LI5600	
Model(s):	LI5590/LI5600/LI5625/LI5650/LI5675	Portable FM UHF FRS/GMRS PTT Radio Transceiver				
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 4 of 33

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

### 3.0 MEASUREMENT SUMMARY

#### SAR EVALUATION RESULTS

Test Type	Freq. MHz	Channel		Test Mode	Battery Type	Accessories		DUT Position to Planar Phantom	Start Power (ERP) mW	Measured SAR 1g (W/kg)		SAR Drift During Test dB	Scaled SAR with droop 1g (W/kg)		
						Body-worn Audio	Spacing cm			Duty Cycle			Duty Cycle		
									100% 50%		100% 50%				
Face	462.7250	22	GMRS	CW	Li-ion	--	2.5	Front Side	610	2.14	1.07	-0.135	2.21	1.10	
Body	462.7250	22	GMRS	CW	Li-ion	Belt-Clip	0.4	Back Side	610	2.23	1.12	0.097	-	-	
						Ear-Mic									
<b>ANSI / IEEE C95.1: 2005 - SAFETY LIMIT</b>					<b>BRAIN / BODY: 1.6 W/kg (averaged over 1 gram)</b>					<b>Spatial Peak Uncontrolled Exposure / General Population</b>					
<b>Test Date(s)</b>	October 09, 2007				October 09, 2007				<b>Measured Fluid Type</b>		<b>Brain</b>	<b>Body</b>	<b>Unit</b>		
<b>Dielectric Constant <math>\epsilon_r</math></b>	<b>450 MHz Brain</b>				<b>450 MHz Body</b>				<b>Atmospheric Pressure</b>		101.1	101.1	<b>kPa</b>		
	<b>IEEE Target</b>		<b>Meas.</b>	<b>Dev.</b>	<b>IEEE Target</b>		<b>Meas.</b>	<b>Dev.</b>	<b>Relative Humidity</b>		33	33	<b>%</b>		
	43.5	$\pm 5\%$	43.6	+0.3%	56.7	$\pm 5\%$	58.1	+2.5%	<b>Ambient Temperature</b>		24.5	24.5	<b>°C</b>		
<b>Conductivity <math>\sigma</math> (mho/m)</b>	<b>450 MHz Brain</b>				<b>450 MHz Body</b>				<b>Fluid Temperature</b>		23.0	23.0	<b>°C</b>		
	<b>IEEE Target</b>		<b>Meas.</b>	<b>Dev.</b>	<b>IEEE Target</b>		<b>Meas.</b>	<b>Dev.</b>	<b>Fluid Depth</b>		$\geq 15$	$\geq 15$	<b>cm</b>		
	0.87	$\pm 5\%$	0.88	+1.2%	0.94	$\pm 5\%$	0.95	+1.1%	<b><math>\rho</math> (Kg/m<sup>3</sup>)</b>		1000				
<b>Note(s)</b>	1.	The measurement results were obtained with the DUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.													
	2.	The transmission band of the DUT is less than 10 MHz; therefore single channel data only is reported (per FCC OET Bulletin 65, Supplement C, Edition 01-01 - see reference [3]).													
	3.	The area scan evaluation was performed with fully charged batteries. After the area scan was completed the batteries were replaced with fully charged batteries prior to the zoom scan evaluation.													
	4.	The power droop measured by the DASY4 system for the duration of the SAR evaluation was added to the measured SAR level to report a scaled SAR result as shown in the above test data table.													
	5.	The fluid temperature was measured prior to and after the SAR evaluations to ensure the temperature remained within +/-2°C of the fluid temperature reported during the dielectric parameter measurements.													
	6.	The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).													
	7.	The SAR evaluations were performed within 24 hours of the system performance check.													

<b>Company:</b>	<b>Cobra Electronics Corporation</b>	<b>FCC ID:</b>	<b>BBOLI5600</b>	<b>IC ID:</b>	<b>906B-LI5600</b>	
<b>Model(s):</b>	<b>LI5590/LI5600/LI5625/LI5650/LI5675</b>	<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>				
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 5 of 33

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

## 4.0 DETAILS OF SAR EVALUATION

The Cobra Electronics Corporation Model(s): LI5590 / LI5600 / LI5625 / LI5650 / LI5675 Portable FM UHF FRS/GMRS PTT Radio Transceiver was compliant for localized Specific Absorption Rate (General Population / Uncontrolled Exposure) based on the test provisions and conditions described below. The detailed test setup photographs are shown in Appendix D.

1. The DUT was evaluated in a face-held configuration with the front of the radio placed parallel to the outer surface of the planar phantom. A 2.5 cm spacing was maintained between the front of the DUT and the outer surface of the planar phantom.
2. The DUT was tested in a body-worn configuration with the back of the radio placed parallel to the outer surface of the planar phantom. The attached plastic belt-clip accessory was touching the planar phantom and provided a 0.4 cm spacing from the back of the DUT to the outer surface of the planar phantom. The DUT was evaluated for body-worn SAR with the Cobra supplied ear-bud/lapel-microphone audio accessory connected to the audio port.
3. The RF conducted output power of the DUT could not be measured due to a non-detachable antenna. The DUT was evaluated for SAR at the maximum conducted power level preset by the manufacturer.
4. The output power level (ERP) of the DUT referenced in this report was measured by Timco Engineering Inc. prior to the SAR evaluations.
5. The area scan evaluation was performed with fully charged batteries. After the area scan was completed the batteries were replaced with fully charged batteries prior to the zoom scan evaluation.
6. The DUT was tested at maximum power setting in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle) with the transmit key constantly depressed. For a push-to-talk device the 50% duty cycle compensation reported assumes a transmit/receive cycle of equal time base.
7. The fluid temperature was measured prior to and after the SAR evaluations to ensure the temperature remained within +/-2°C of the fluid temperature reported during the dielectric parameter measurements.
8. The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).

## 5.0 EVALUATION PROCEDURES

- a. (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.  
(ii) For body-worn and face-held devices a planar phantom was used.
- b. The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.  
An area scan was determined as follows:
- c. Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
- d. A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.  
A 1g and 10g spatial peak SAR was determined as follows:
- e. Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix F). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- f. Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- g. A zoom scan volume of 32 mm x 32 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.


<b>Company:</b>	<b>Cobra Electronics Corporation</b>	<b>FCC ID:</b>	<b>BBOLI5600</b>	<b>IC ID:</b>	<b>906B-LI5600</b>	
<b>Model(s):</b>	<b>LI5590/LI5600/LI5625/LI5650/LI5675</b>	<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>				
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

## 6.0 SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluations a system check was performed using a Plexiglas planar phantom and 450 MHz dipole (see Appendix B for system performance check test plot). The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C for measured fluid dielectric parameters). A forward power of 250 mW was applied to the dipole and the system was verified to a tolerance of  $\pm 10\%$  from the system validation target SAR value (see Appendix E for system validation procedures).

SYSTEM PERFORMANCE CHECK EVALUATION																
Test Date	Equiv. Tissue	SAR 1g (W/kg)			Dielectric Constant $\epsilon_r$			Conductivity $\sigma$ (mho/m)			$\rho$ (Kg/m <sup>3</sup> )	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		Sys. Val Target	Meas.	Dev.	Sys. Val Target	Meas.	Dev.	Sys. Val Target	Meas.	Dev.						
Oct. 9	Brain 450	1.29 $\pm 10\%$	1.31	+1.6%	43.1 $\pm 5\%$	43.6	+1.2%	0.85 $\pm 5\%$	0.88	+3.6%	1000	24.5	23.0	$\geq 15$	33	101.1
Note(s)		<ol style="list-style-type: none"> <li>The target SAR value is referenced from the System Validation procedure performed by Celltech Labs Inc. (see Appendix E).</li> <li>The target dielectric parameters are referenced from the System Validation procedure performed by Celltech Labs Inc. (see Appendix E).</li> <li>The fluid temperature was measured prior to and after the system performance check to ensure the temperature remained within <math>\pm 2^\circ\text{C}</math> of the fluid temperature reported during the dielectric parameter measurements.</li> <li>The SAR evaluations were performed within 24 hours of the system performance check.</li> </ol>														

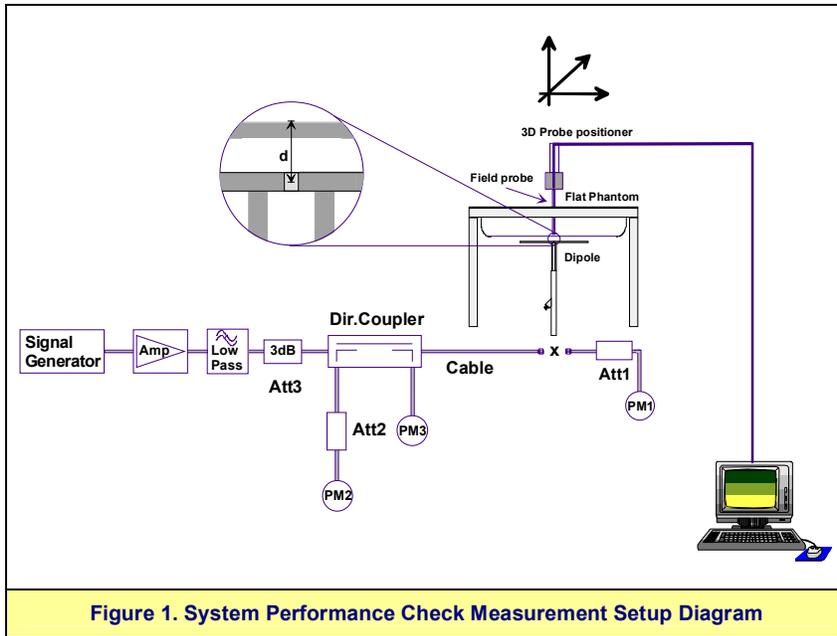

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	 
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

## 7.0 SIMULATED EQUIVALENT TISSUES

The simulated tissue mixtures consist of a viscous gel using hydroxyethylcellulose (HEC) gelling agent and saline solution. Preservation with a bactericide is added and visual inspection is made to ensure air bubbles are not trapped during the mixing process. The fluid was prepared according to standardized procedures, and measured for dielectric parameters (permittivity and conductivity).

SIMULATED TISSUE MIXTURES		
INGREDIENT	450 MHz Brain	450 MHz Body
	System Check & DUT Evaluation	DUT Evaluation
Water	38.56 %	52.00 %
Sugar	56.32 %	45.65 %
Salt	3.95 %	1.75 %
HEC	0.98 %	0.50 %
Bactericide	0.19 %	0.10 %

## 8.0 SAR SAFETY LIMITS

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0
The Spatial Average value of the SAR averaged over the whole body.		
The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.		
The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.		
Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.		
Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.		

<b>Company:</b>	<b>Cobra Electronics Corporation</b>	<b>FCC ID:</b>	<b>BBOLI5600</b>	<b>IC ID:</b>	<b>906B-LI5600</b>	
<b>Model(s):</b>	<b>LI5590/LI5600/LI5625/LI5650/LI5675</b>	<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>				
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 8 of 33

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

## 9.0 ROBOT SYSTEM SPECIFICATIONS

<u>Specifications</u>	
<b>Positioner</b>	Stäubli Unimation Corp. Robot Model: RX60L
<b>Repeatability</b>	0.02 mm
<b>No. of axis</b>	6
<u>Data Acquisition Electronic (DAE) System</u>	
<u>Cell Controller</u>	
<b>Processor</b>	AMD Athlon XP 2400+
<b>Clock Speed</b>	2.0 GHz
<b>Operating System</b>	Windows XP Professional
<u>Data Converter</u>	
<b>Features</b>	Signal Amplifier, multiplexer, A/D converter, and control logic
<b>Software</b>	Measurement Software: DASY4, V4.7 Build 44
	Postprocessing Software: SEMCAD, V1.8 Build 171
<b>Connecting Lines</b>	Optical downlink for data and status info., Optical uplink for commands and clock
<u>DASY4 Measurement Server</u>	
<b>Function</b>	Real-time data evaluation for field measurements and surface detection
<b>Hardware</b>	PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
<b>Connections</b>	COM1, COM2, DAE, Robot, Ethernet, Service Interface
<u>E-Field Probe</u>	
<b>Model</b>	ET3DV6
<b>Serial No.</b>	1387
<b>Construction</b>	Triangular core fiber optic detection system
<b>Frequency</b>	10 MHz to 6 GHz
<b>Linearity</b>	±0.2 dB (30 MHz to 3 GHz)
<u>Evaluation Phantom</u>	
<b>Type</b>	Side Planar Phantom
<b>Shell Material</b>	Plexiglas
<b>Bottom Thickness</b>	2.0 mm ± 0.1 mm
<b>Outer Dimensions</b>	75.0 cm (L) x 22.5 cm (W) x 20.5 cm (H); Back Plane: 25.7 cm (H)
<u>Validation Phantom (≤ 450MHz)</u>	
<b>Type</b>	Planar Phantom
<b>Shell Material</b>	Plexiglas
<b>Bottom Thickness</b>	6.2 mm ± 0.1 mm
<b>Outer Dimensions</b>	86.0 cm (L) x 39.5 cm (W) x 21.8 cm (H)


<b>Company:</b>	Cobra Electronics Corporation	<b>FCC ID:</b>	BBOLI5600	<b>IC ID:</b>	906B-LI5600	
<b>Model(s):</b>	LI5590/LI5600/LI5625/LI5650/LI5675	Portable FM UHF FRS/GMRS PTT Radio Transceiver				
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 9 of 33

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	 
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

## 10.0 PROBE SPECIFICATION (ET3DV6)

<p><b>Construction:</b> Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, glycol)</p> <p><b>Calibration:</b> In air from 10 MHz to 2.5 GHz In brain simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy <math>\pm 8\%</math>)</p> <p><b>Frequency:</b> 10 MHz to &gt; 6 GHz; Linearity: <math>\pm 0.2</math> dB (30 MHz to 3 GHz)</p> <p><b>Directivity:</b> <math>\pm 0.2</math> dB in brain tissue (rotation around probe axis) <math>\pm 0.4</math> dB in brain tissue (rotation normal to probe axis)</p> <p><b>Dynamic Range:</b> 5 <math>\mu</math>W/g to &gt; 100 mW/g; Linearity: <math>\pm 0.2</math> dB</p> <p><b>Surface Detect:</b> <math>\pm 0.2</math> mm repeatability in air and clear liquids over diffuse reflecting surfaces</p> <p><b>Dimensions:</b> Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm</p> <p><b>Application:</b> General dosimetry up to 3 GHz Compliance tests of mobile phone</p>	
<b>ET3DV6 E-Field Probe</b>	

## 11.0 SIDE PLANAR PHANTOM
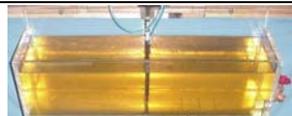
<p>The side planar phantom is constructed of Plexiglas material with a 2.0 mm shell thickness for face-held and body-worn SAR evaluations of portable radio transceivers. The side planar phantom is mounted on the side of the DASY4 compact system table.</p>	
<b>Plexiglas Side Planar Phantom</b>	

## 12.0 VALIDATION PLANAR PHANTOM

<p>The validation planar phantom is constructed of Plexiglas material with a 6.0 mm shell thickness for system validations at 450MHz and below. The validation planar phantom is mounted to the table of the DASY4 compact system.</p>	
<b>Plexiglas Validation Planar Phantom</b>	

## 13.0 DEVICE HOLDER

<p>The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.</p>	
<b>Device Holder</b>	

<b>Company:</b>	<b>Cobra Electronics Corporation</b>	<b>FCC ID:</b>	<b>BBOLI5600</b>	<b>IC ID:</b>	<b>906B-LI5600</b>	
<b>Model(s):</b>	<b>LI5590/LI5600/LI5625/LI5650/LI5675</b>	<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>				
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 10 of 33

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

## 14.0 TEST EQUIPMENT LIST

TEST EQUIPMENT		ASSET NO.	SERIAL NO.	DATE CALIBRATED		CALIBRATION DUE DATE	
USED	DESCRIPTION			Brain	Body		
x	Schmid & Partner DASY4 System	-	-	-	-	-	
x	-DASY4 Measurement Server	00158	1078	N/A	N/A	N/A	
x	-Robot	00046	599396-01	N/A	N/A	N/A	
x	-DAE4	00019	353	10Jul07	10Jul08	10Jul08	
	-DAE3	00018	370	13Mar07	13Mar08	13Mar08	
x	-ET3DV6 E-Field Probe	00016	1387	16Mar07	16Mar08	16Mar08	
	-EX3DV4 E-Field Probe	00213	3600	24Jan07	24Jan08	24Jan08	
	-300 MHz Validation Dipole	00023	135	08Jun07	08Jun08	08Jun08	
x	-450 MHz Validation Dipole	00024	136	30Jul07	30Jul08	30Jul08	
	-835 MHz Validation Dipole	00022	411	Brain	07Jun07	07Jun08	
				Body	07Jun07	07Jun08	
	-900 MHz Validation Dipole	00020	054	Brain	07Jun07	07Jun08	
				Body	07Jun07	07Jun08	
	-1800 MHz Validation Dipole	00021	247	Brain	06Jun07	06Jun08	
				Body	06Jun07	06Jun08	
	-1900 MHz Validation Dipole	00032	151	Brain	06Jun07	06Jun08	
				Body	06Jun07	06Jun08	
	-2450 MHz Validation Dipole	00025	150	Brain	16Jul07	16Jul08	
				Body	08Jun07	08Jun08	
	5GHz Validation Dipole	00126	1031	Body	18May07	18May08	
				-5200 MHz	Body	22May07	22May08
				-5500 MHz	Brain	09May07	09May08
				-5800 MHz	Body	10May07	10May08
	-SAM Phantom V4.0C	00154	1033	N/A	N/A	N/A	
	-Barski Planar Phantom	00155	03-01	N/A	N/A	N/A	
x	-Plexiglas Side Planar Phantom	00156	161	N/A	N/A	N/A	
x	-Plexiglas Validation Planar Phantom	00157	137	N/A	N/A	N/A	
	ALS-PR-DIEL Dielectric Probe Kit	00160	260-00953	N/A	N/A	N/A	
x	HP 85070C Dielectric Probe Kit	00033	US39240170	N/A	N/A	N/A	
x	Gigatronics 8652A Power Meter	00007	1835272	26Mar07	26Mar08	26Mar08	
	Gigatronics 8652A Power Meter	00008	1835267	22Jan07	22Jan08	22Jan08	
x	Gigatronics 80701A Power Sensor	00012	1834350	22Jan07	22Jan08	22Jan08	
x	Gigatronics 80701A Power Sensor	00014	1833699	22Jan07	22Jan08	22Jan08	
x	HP 8753ET Network Analyzer	00134	US39170292	20Apr07	20Apr08	20Apr08	
x	HP 8648D Signal Generator	00005	3847A00611	NCR	NCR	NCR	
	Rohde & Schwarz SMR20 Signal Generator	00006	100104	NCR	NCR	NCR	
x	Amplifier Research 5S1G4 Power Amplifier	00106	26235	NCR	NCR	NCR	
	Amplifier Research 10W1000C Power Amplifier	00041	27887	NCR	NCR	NCR	
	Nextec NB00383 Microwave Amplifier	00151	0535	NCR	NCR	NCR	
	HP E4408B Spectrum Analyzer	00015	US39240170	05Feb07	05Feb08	05Feb08	

<b>Company:</b>	<b>Cobra Electronics Corporation</b>	<b>FCC ID:</b>	<b>BBOLI5600</b>	<b>IC ID:</b>	<b>906B-LI5600</b>	
<b>Model(s):</b>	<b>LI5590/LI5600/LI5625/LI5650/LI5675</b>	<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>				
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 11 of 33

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	 
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

## 15.0 MEASUREMENT UNCERTAINTIES

UNCERTAINTY BUDGET FOR DEVICE EVALUATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	Uncertainty Value ±% (1g)	V <sub>i</sub> or V <sub>eff</sub>
<b>Measurement System</b>						
Probe calibration (450 MHz)	8.0	Normal	1	1	8.0	∞
Axial isotropy of the probe	4.7	Rectangular	1.732050808	0.7	1.9	∞
Spherical isotropy of the probe	9.6	Rectangular	1.732050808	0.7	3.9	∞
Spatial resolution	0	Rectangular	1.732050808	1	0.0	∞
Boundary effects	1	Rectangular	1.732050808	1	0.6	∞
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	∞
Detection limit	1	Rectangular	1.732050808	1	0.6	∞
Readout electronics	0.3	Normal	1	1	0.3	∞
Response time	0.8	Rectangular	1.732050808	1	0.5	∞
Integration time	2.6	Rectangular	1.732050808	1	1.5	∞
RF ambient conditions	3	Rectangular	1.732050808	1	1.7	∞
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	∞
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	∞
Extrapolation & integration	1	Rectangular	1.732050808	1	0.6	∞
<b>Test Sample Related</b>						
Device positioning	2.9	Normal	1	1	2.9	12
Device holder uncertainty	3.6	Normal	1	1	3.6	8
Power drift	5	Rectangular	1.732050808	1	2.9	∞
<b>Phantom and Setup</b>						
Phantom uncertainty	4	Rectangular	1.732050808	1	2.3	∞
Liquid conductivity (target)	5	Rectangular	1.732050808	0.64	1.8	∞
Liquid conductivity (measured)	5	Normal	1	0.64	3.2	∞
Liquid permittivity (target)	5	Rectangular	1.732050808	0.6	1.7	∞
Liquid permittivity (measured)	5	Normal	1	0.6	3.0	∞
<b>Combined Standard Uncertainty</b>					<b>12.65</b>	
<b>Expanded Uncertainty (k=2)</b>					<b>25.31</b>	
Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5])						

<b>Company:</b>	Cobra Electronics Corporation	<b>FCC ID:</b>	BBOLI5600	<b>IC ID:</b>	906B-LI5600	
<b>Model(s):</b>	LI5590/LI5600/LI5625/LI5650/LI5675	Portable FM UHF FRS/GMRS PTT Radio Transceiver				
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 12 of 33

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

## MEASUREMENT UNCERTAINTIES (Cont.)

UNCERTAINTY BUDGET FOR SYSTEM VALIDATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	Uncertainty Value ±% (1g)	V <sub>i</sub> or V <sub>eff</sub>
<b>Measurement System</b>						
Probe calibration (450 MHz)	8.0	Normal	1	1	8.0	∞
Axial isotropy of the probe	4.7	Rectangular	1.732050808	1	2.7	∞
Spherical isotropy of the probe	0	Rectangular	1.732050808	1	0.0	∞
Spatial resolution	0	Rectangular	1.732050808	1	0.0	∞
Boundary effects	1	Rectangular	1.732050808	1	0.6	∞
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	∞
Detection limit	1	Rectangular	1.732050808	1	0.6	∞
Readout electronics	0.3	Normal	1	1	0.3	∞
Response time	0	Rectangular	1.732050808	1	0.0	∞
Integration time	0	Rectangular	1.732050808	1	0.0	∞
RF ambient conditions	3	Rectangular	1.732050808	1	1.7	∞
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	∞
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	∞
Extrapolation & integration	1	Rectangular	1.732050808	1	0.6	∞
<b>Test Sample Related</b>						
Dipole Positioning	2	Normal	1.732050808	1	1.2	∞
Power & Power Drift	4.7	Normal	1.732050808	1	2.7	∞
<b>Phantom and Setup</b>						
Phantom uncertainty	4	Rectangular	1.732050808	1	2.3	∞
Liquid conductivity (target)	5	Rectangular	1.732050808	0.64	1.8	∞
Liquid conductivity (measured)	5	Normal	1	0.64	3.2	∞
Liquid permittivity (target)	5	Rectangular	1.732050808	0.6	1.7	∞
Liquid permittivity (measured)	5	Normal	1	0.6	3.0	∞
<b>Combined Standard Uncertainty</b>					<b>11.20</b>	
<b>Expanded Uncertainty (k=2)</b>					<b>22.39</b>	
Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5])						

<b>Company:</b>	Cobra Electronics Corporation	<b>FCC ID:</b>	BBOLI5600	<b>IC ID:</b>	906B-LI5600	
<b>Model(s):</b>	LI5590/LI5600/LI5625/LI5650/LI5675	Portable FM UHF FRS/GMRS PTT Radio Transceiver				
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 13 of 33

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

## 16.0 REFERENCES

- [1] Federal Communications Commission - "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093: 1999.
- [2] Health Canada - "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6: 1999.
- [3] Federal Communications Commission - "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada - "Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)", Radio Standards Specification RSS-102 Issue 2: November 2005.
- [5] IEEE Standard 1528-2003 - "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [6] ANSI/IEEE C95.1-2005 - "American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3 kHz to 300 GHz", New York: IEEE, April 2006.

<b>Company:</b>	<b>Cobra Electronics Corporation</b>	<b>FCC ID:</b>	<b>BBOLI5600</b>	<b>IC ID:</b>	<b>906B-LI5600</b>	
<b>Model(s):</b>	<b>LI5590/LI5600/LI5625/LI5650/LI5675</b>	<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>				
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 14 of 33

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

**APPENDIX A - SAR MEASUREMENT DATA**

<b>Company:</b>	<b>Cobra Electronics Corporation</b>	<b>FCC ID:</b>	<b>BBOLI5600</b>	<b>IC ID:</b>	<b>906B-LI5600</b>	
<b>Model(s):</b>	<b>LI5590/LI5600/LI5625/LI5650/LI5675</b>	<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>				
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 15 of 33

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Date Tested: 10/09/2007

### Face-Held SAR - Channel 22 - 462.7250 MHz (GMRS)

**DUT: Cobra Model: LI5600; Type: Portable FRS/GMRS PTT Radio Transceiver; Serial: 0083407**

Ambient Temp: 24.5°C; Fluid Temp: 23.0°C; Barometric Pressure: 101.1 kPa; Humidity: 33%

Communication System: FM UHF  
 RF Output Power: 610 mW (ERP)  
 7.4V, 650mAh Lithium-ion Battery Pack  
 Frequency: 462.725 MHz; Duty Cycle: 1:1  
 Medium: HSL450 Medium parameters used:  $f = 462.725 \text{ MHz}$ ;  $\sigma = 0.88 \text{ mho/m}$ ;  $\epsilon_r = 43.6$ ;  $\rho = 1000 \text{ kg/m}^3$


- Probe: ET3DV6 - SN1387; ConvF(7, 7, 7); Calibrated: 16/03/2007
- Sensor-Surface: 4 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 10/07/2007
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

### Face-Held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom - Channel 22

**Area Scan (7x12x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 1.89 mW/g

### Face-Held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom - Channel 22


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 49.2 V/m; Power Drift = -0.135 dB  
 Peak SAR (extrapolated) = 3.41 W/kg  
**SAR(1 g) = 2.14 mW/g; SAR(10 g) = 1.49 mW/g**  
 Maximum value of SAR (measured) = 2.24 mW/g

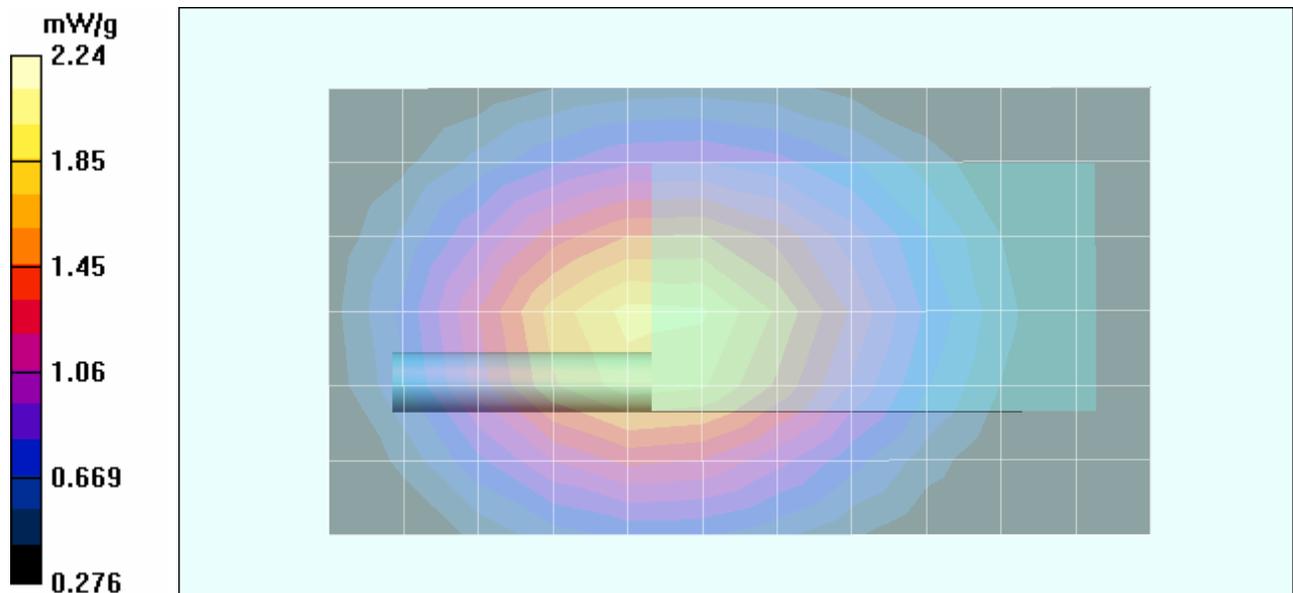

<b>Company:</b>	Cobra Electronics Corporation	<b>FCC ID:</b>	BBOLI5600	<b>IC ID:</b>	906B-LI5600	
<b>Model(s):</b>	LI5590/LI5600/LI5625/LI5650/LI5675	Portable FM UHF FRS/GMRS PTT Radio Transceiver				
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 16 of 33

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

## Z-Axis Scan

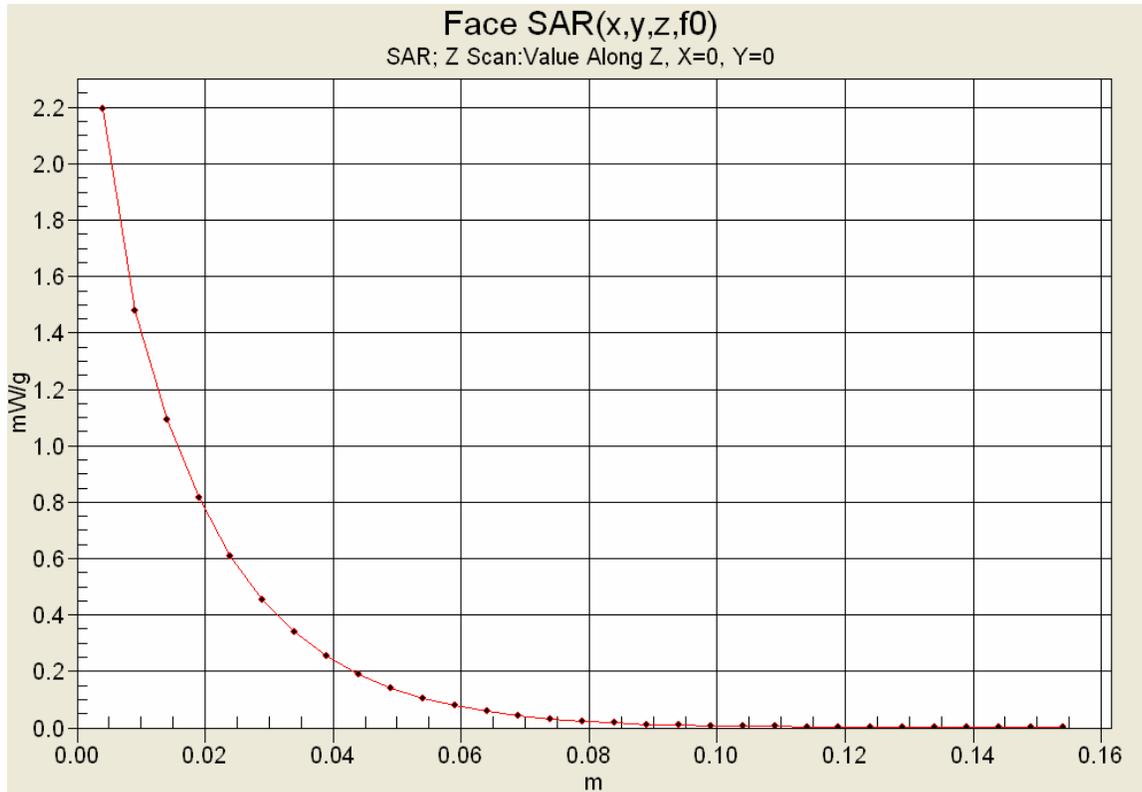

<b>Company:</b>	Cobra Electronics Corporation	<b>FCC ID:</b>	BBOLI5600	<b>IC ID:</b>	906B-LI5600	
<b>Model(s):</b>	LI5590/LI5600/LI5625/LI5650/LI5675	Portable FM UHF FRS/GMRS PTT Radio Transceiver				
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 17 of 33

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Date Tested: 10/09/2007

### Body-worn SAR - Channel 22 - 462.7250 MHz (GMRS)

**DUT: Cobra Model: LI5600; Type: Portable FRS/GMRS PTT Radio Transceiver; Serial: 0083407**

**Body-Worn Accessory: Plastic Belt-Clip; Audio Accessory: Ear-bud w/ Lapel-Microphone (P/N: GA-EMB2)**

Ambient Temp: 24.5°C; Fluid Temp: 23.0°C; Barometric Pressure: 101.1 kPa; Humidity: 33%

Communication System: FM UHF

RF Output Power: 610 mW (ERP)

7.4V, 650mAh Lithium-ion Battery Pack

Frequency: 462.725 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used:  $f = 462.725 \text{ MHz}$ ;  $\sigma = 0.95 \text{ mho/m}$ ;  $\epsilon_r = 58.1$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1387; ConvF(6.9, 6.9, 6.9); Calibrated: 16/03/2007
- Sensor-Surface: 4 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 10/07/2007
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

### Body-Worn SAR - 0.4 cm Belt-Clip Spacing from Back of DUT to Planar Phantom - Channel 22

**Area Scan (7x12x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 2.26 mW/g

### Body-Worn SAR - 0.4 cm Belt-Clip Spacing from Back of DUT to Planar Phantom - Channel 22


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 42.4 V/m; Power Drift = 0.097 dB

Peak SAR (extrapolated) = 3.58 W/kg

**SAR(1 g) = 2.23 mW/g; SAR(10 g) = 1.51 mW/g**


Maximum value of SAR (measured) = 2.34 mW/g

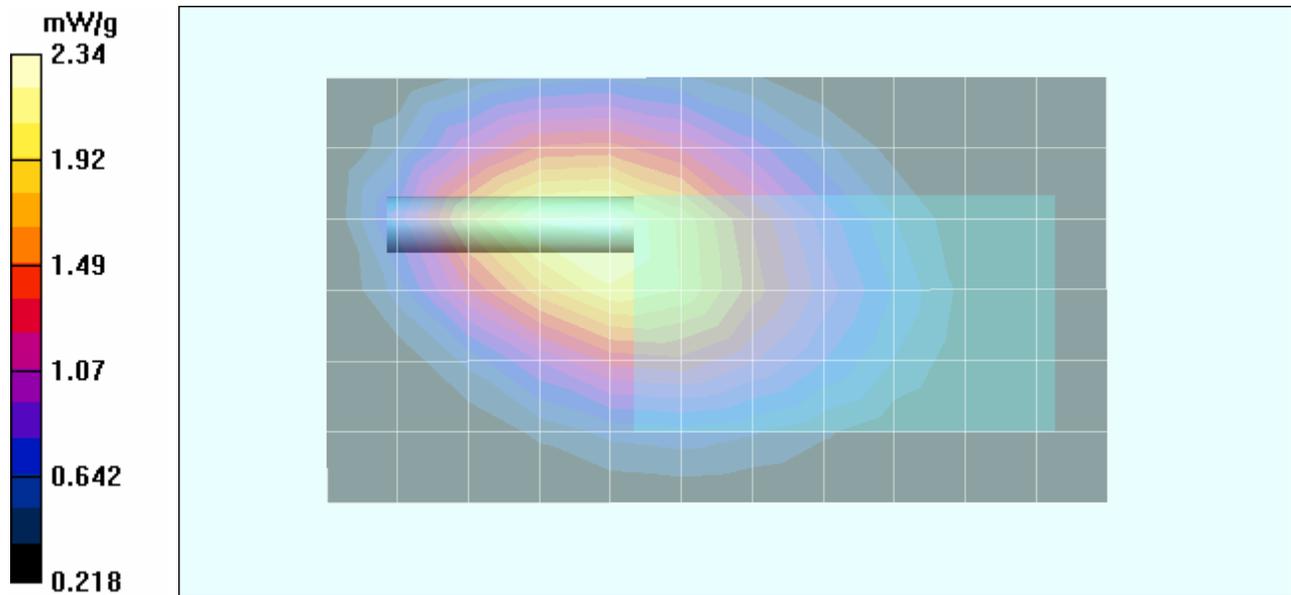

Company:	Cobra Electronics Corporation	FCC ID:	BBOLI5600	IC ID:	906B-LI5600	
Model(s):	LI5590/LI5600/LI5625/LI5650/LI5675	Portable FM UHF FRS/GMRS PTT Radio Transceiver				
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 18 of 33

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

## Z-Axis Scan

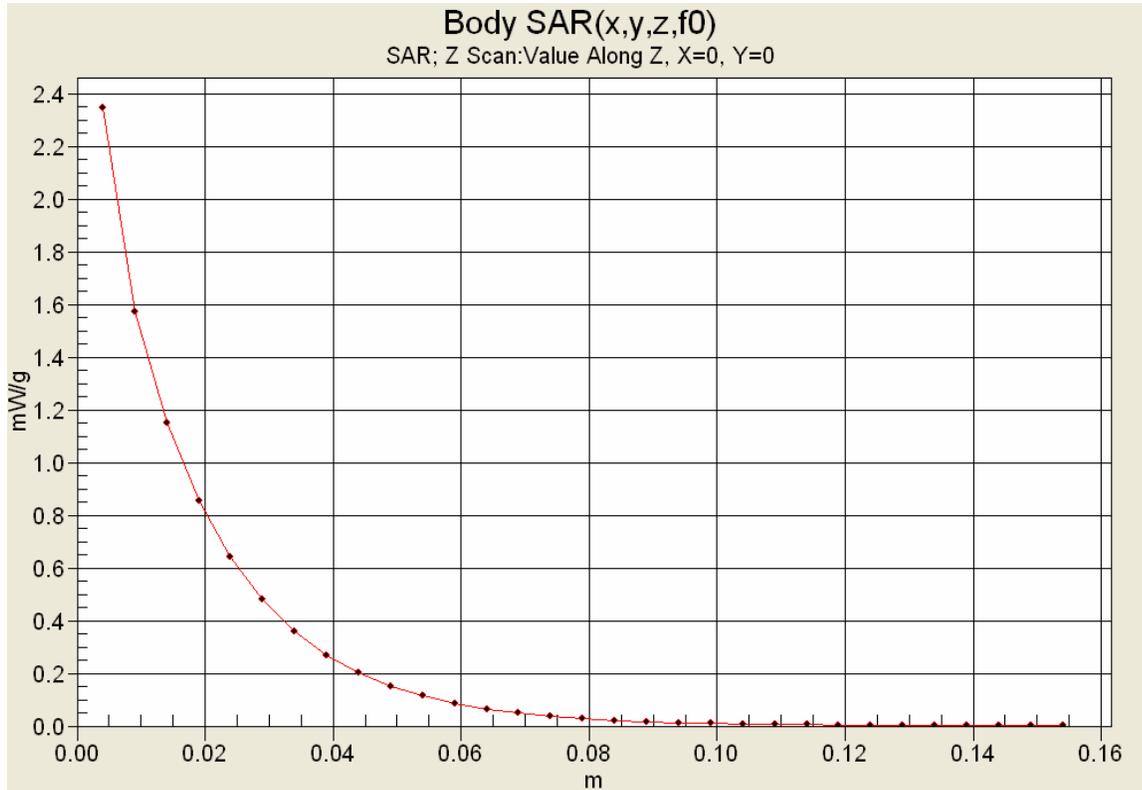

<b>Company:</b>	Cobra Electronics Corporation	<b>FCC ID:</b>	BBOLI5600	<b>IC ID:</b>	906B-LI5600	
<b>Model(s):</b>	LI5590/LI5600/LI5625/LI5650/LI5675	Portable FM UHF FRS/GMRS PTT Radio Transceiver				
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 19 of 33

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

**APPENDIX B - SYSTEM PERFORMANCE CHECK DATA**

<b>Company:</b>	<b>Cobra Electronics Corporation</b>	<b>FCC ID:</b>	<b>BBOLI5600</b>	<b>IC ID:</b>	<b>906B-LI5600</b>	
<b>Model(s):</b>	<b>LI5590/LI5600/LI5625/LI5650/LI5675</b>	<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>				
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 20 of 33

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Date Tested: 10/09/2007

### System Performance Check - 450 MHz Dipole - HSL

**DUT: Dipole 450 MHz; Asset: 00024; Serial: 136; Validation: 07/30/2007**

Ambient Temp: 24.5°C; Fluid Temp: 23.0°C; Barometric Pressure: 101.1 kPa; Humidity: 33%

Communication System: CW

Forward Conducted Power: 250 mW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used:  $f = 450 \text{ MHz}$ ;  $\sigma = 0.88 \text{ mho/m}$ ;  $\epsilon_r = 43.6$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1387; ConvF(7, 7, 7); Calibrated: 16/03/2007

- Sensor-Surface: 4 mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn353; Calibrated: 10/07/2007

- Phantom: Validation Planar; Type: Plexiglas; Serial: 137

- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### 450 MHz Dipole - System Performance Check/Area Scan (6x11x1):

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.35 mW/g

#### 450 MHz Dipole - System Performance Check/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 39.2 V/m; Power Drift = 0.017 dB

Peak SAR (extrapolated) = 2.30 W/kg

**SAR(1 g) = 1.31 mW/g; SAR(10 g) = 0.845 mW/g**


Maximum value of SAR (measured) = 1.39 mW/g

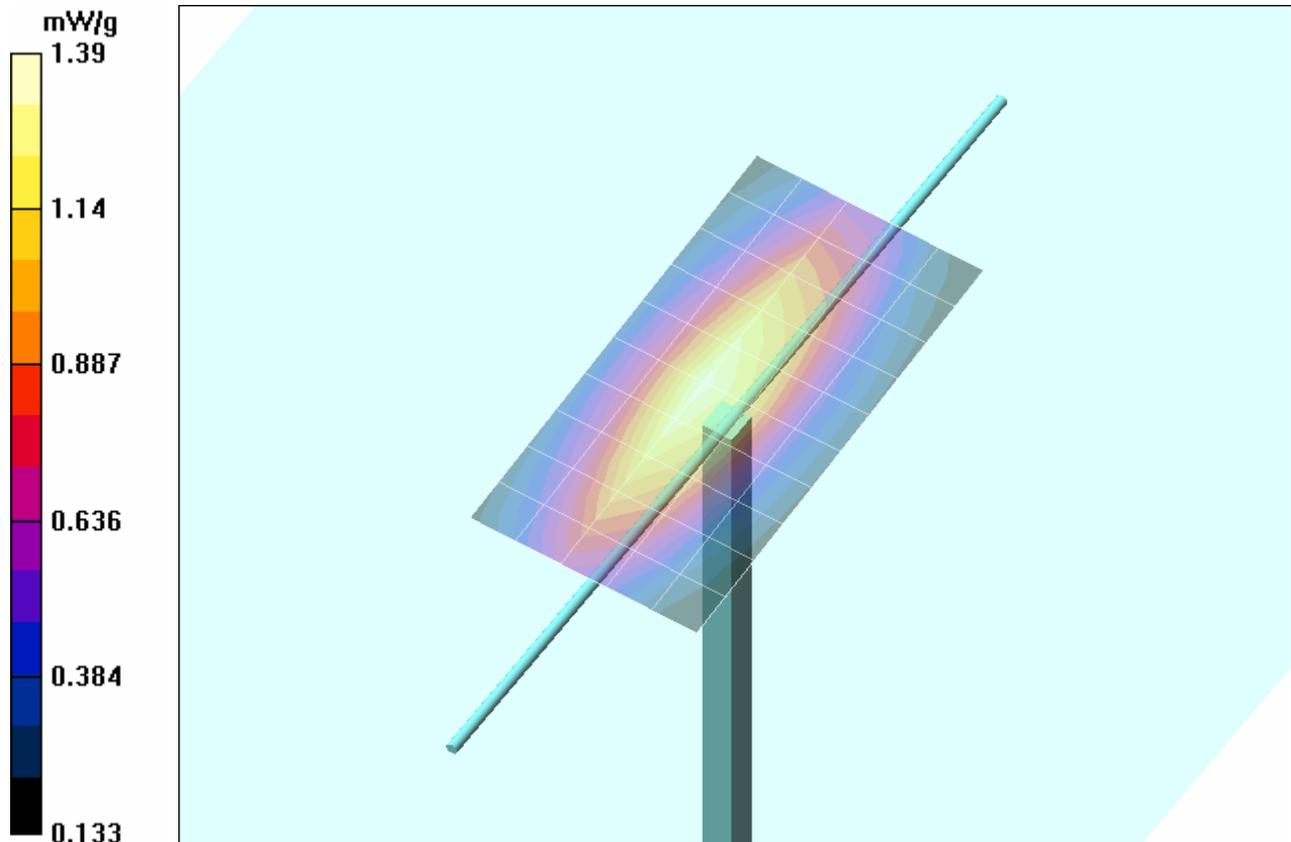

<b>Company:</b>	Cobra Electronics Corporation	<b>FCC ID:</b>	BBOLI5600	<b>IC ID:</b>	906B-LI5600	
<b>Model(s):</b>	LI5590/LI5600/LI5625/LI5650/LI5675	Portable FM UHF FRS/GMRS PTT Radio Transceiver				
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 21 of 33

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

## Z-Axis Scan

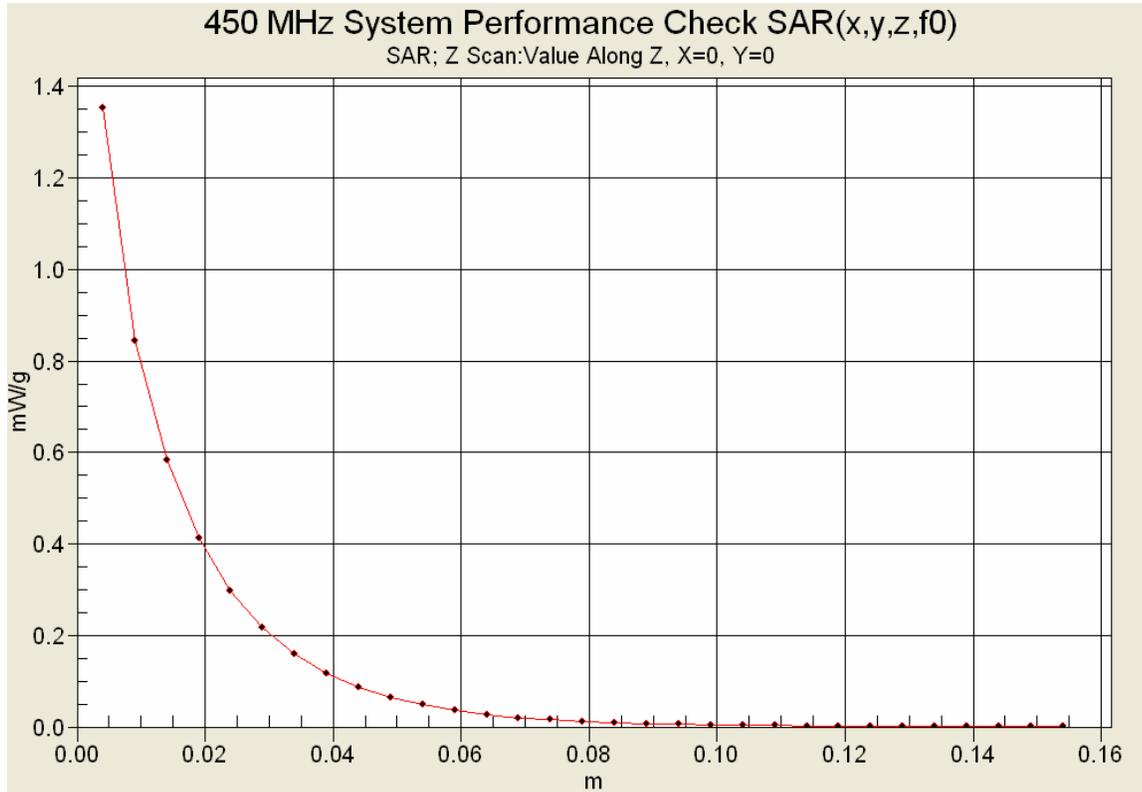

<b>Company:</b>	Cobra Electronics Corporation	<b>FCC ID:</b>	BBOLI5600	<b>IC ID:</b>	906B-LI5600	
<b>Model(s):</b>	LI5590/LI5600/LI5625/LI5650/LI5675	Portable FM UHF FRS/GMRS PTT Radio Transceiver				
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 22 of 33

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

**APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS**

<b>Company:</b>	<b>Cobra Electronics Corporation</b>	<b>FCC ID:</b>	<b>BBOLI5600</b>	<b>IC ID:</b>	<b>906B-LI5600</b>	
<b>Model(s):</b>	<b>LI5590/LI5600/LI5625/LI5650/LI5675</b>	<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>				
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 23 of 33

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

### 450 MHz System Performance Check & DUT Evaluation (Brain)

\*\*\*\*\*

Celltech Labs Inc.  
Test Result for UIM Dielectric Parameter  
Tue 09/Oct/2007  
Frequency (GHz)  
FCC\_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon  
FCC\_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma  
Test\_e Epsilon of UIM  
Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eHFCC	FCC_sHFCC	Test_e	Test_s
0.3500	44.70	0.87	46.26	0.79
0.3600	44.58	0.87	45.87	0.80
0.3700	44.46	0.87	45.66	0.81
0.3800	44.34	0.87	45.33	0.82
0.3900	44.22	0.87	44.88	0.83
0.4000	44.10	0.87	44.89	0.83
0.4100	43.98	0.87	44.60	0.84
0.4200	43.86	0.87	44.24	0.85
0.4300	43.74	0.87	44.04	0.86
0.4400	43.62	0.87	44.10	0.87
0.4500	43.50	0.87	43.59	0.88
0.4600	43.45	0.87	43.49	0.89
0.4700	43.40	0.87	43.01	0.90
0.4800	43.34	0.87	42.92	0.90
0.4900	43.29	0.87	42.79	0.91
0.5000	43.24	0.87	42.58	0.93
0.5100	43.19	0.87	42.49	0.93
0.5200	43.14	0.88	42.24	0.94
0.5300	43.08	0.88	42.01	0.95
0.5400	43.03	0.88	42.01	0.96
0.5500	42.98	0.88	41.72	0.96

<b>Company:</b>	<b>Cobra Electronics Corporation</b>	<b>FCC ID:</b>	<b>BBOLI5600</b>	<b>IC ID:</b>	<b>906B-LI5600</b>	
<b>Model(s):</b>	<b>LI5590/LI5600/LI5625/LI5650/LI5675</b>	<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>				
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 24 of 33

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

### 450 MHz DUT Evaluation (Body)

\*\*\*\*\*

Celltech Labs Inc.  
 Test Result for UIM Dielectric Parameter  
 Tue 09/Oct/2007  
 Frequency (GHz)  
 FCC\_eHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon  
 FCC\_sHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma  
 FCC\_eB FCC Limits for Body Epsilon  
 FCC\_sB FCC Limits for Body Sigma  
 Test\_e Epsilon of UIM  
 Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.3500	57.70	0.93	59.75	0.87
0.3600	57.60	0.93	59.30	0.88
0.3700	57.50	0.93	59.17	0.89
0.3800	57.40	0.93	58.98	0.89
0.3900	57.30	0.93	58.79	0.90
0.4000	57.20	0.93	58.66	0.91
0.4100	57.10	0.93	58.58	0.92
0.4200	57.00	0.94	58.39	0.92
0.4300	56.90	0.94	58.49	0.93
0.4400	56.80	0.94	58.35	0.94
0.4500	56.70	0.94	58.05	0.95
0.4600	56.66	0.94	58.14	0.96
0.4700	56.62	0.94	57.79	0.96
0.4800	56.58	0.94	57.78	0.97
0.4900	56.54	0.94	57.74	0.98
0.5000	56.51	0.94	57.62	0.99
0.5100	56.47	0.94	57.52	1.00
0.5200	56.43	0.95	57.36	1.01
0.5300	56.39	0.95	57.22	1.01
0.5400	56.35	0.95	57.25	1.02
0.5500	56.31	0.95	57.15	1.03


	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

**APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS**

<b>Company:</b>	<b>Cobra Electronics Corporation</b>	<b>FCC ID:</b>	<b>BBOLI5600</b>	<b>IC ID:</b>	<b>906B-LI5600</b>	
<b>Model(s):</b>	<b>LI5590/LI5600/LI5625/LI5650/LI5675</b>	<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>				
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 26 of 33

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	



**FACE-HELD SAR TEST SETUP PHOTOGRAPHS**  
 2.5 cm Spacing from Front of DUT to Planar Phantom

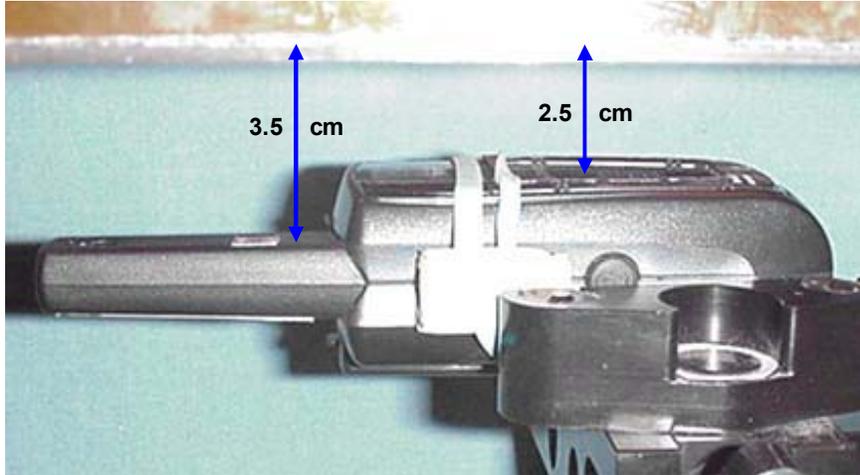

<b>Company:</b>	Cobra Electronics Corporation	<b>FCC ID:</b>	BBOLI5600	<b>IC ID:</b>	906B-LI5600	
<b>Model(s):</b>	LI5590/LI5600/LI5625/LI5650/LI5675	<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>				
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 27 of 33

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

**BODY-WORN SAR TEST SETUP PHOTOGRAPHS**  
**0.4 cm Belt-Clip Spacing from Back of DUT to Planar Phantom**  
**DUT with Ear-bud/Lapel-Microphone Audio Accessory**

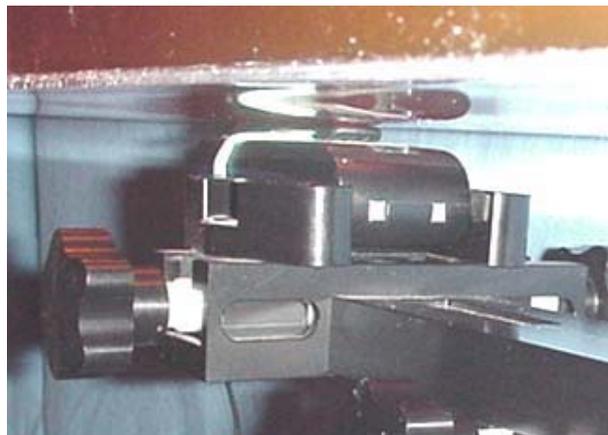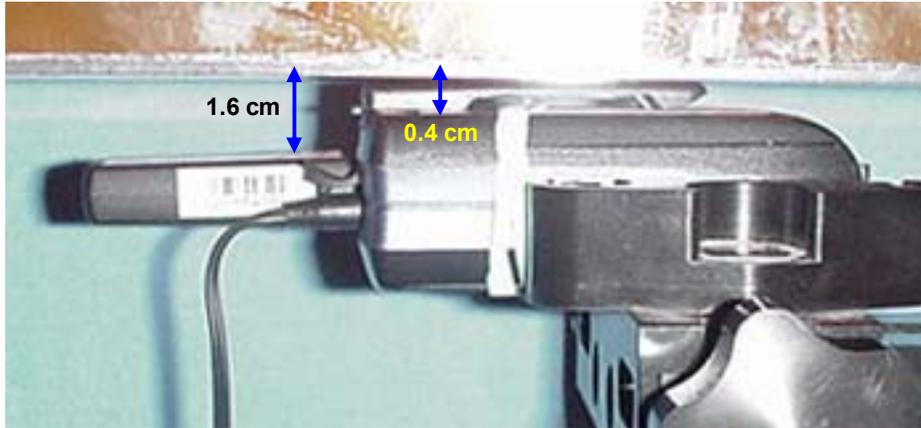

<b>Company:</b>	<b>Cobra Electronics Corporation</b>	<b>FCC ID:</b>	<b>BBOLI5600</b>	<b>IC ID:</b>	<b>906B-LI5600</b>	
<b>Model(s):</b>	<b>LI5590/LI5600/LI5625/LI5650/LI5675</b>	<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>				
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 28 of 33

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

## DUT PHOTOGRAPHS

		
Front of DUT	Back of DUT	Back of DUT with Plastic Belt-Clip
		
Top End of DUT	Bottom End of DUT	

Company:	Cobra Electronics Corporation	FCC ID:	BBOLI5600	IC ID:	906B-LI5600	
Model(s):	LI5590/LI5600/LI5625/LI5650/LI5675	Portable FM UHF FRS/GMRS PTT Radio Transceiver				
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 29 of 33

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

## DUT PHOTOGRAPHS



**Left Side of DUT with Plastic Belt-Clip**



**Right Side of DUT with Plastic Belt-Clip**



**DUT Battery Compartment**



**DUT with Li-ion Battery Pack**

<b>Company:</b>	Cobra Electronics Corporation	<b>FCC ID:</b>	BBOLI5600	<b>IC ID:</b>	906B-LI5600	
<b>Model(s):</b>	LI5590/LI5600/LI5625/LI5650/LI5675	<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>				
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 30 of 33

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

**DUT PHOTOGRAPHS**



**DUT with Ear-bud/Lapel-Microphone Audio Accessory (P/N: GA-EMB2)**

<b>Company:</b>	Cobra Electronics Corporation	<b>FCC ID:</b>	BBOLI5600	<b>IC ID:</b>	906B-LI5600	
<b>Model(s):</b>	LI5590/LI5600/LI5625/LI5650/LI5675	<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>				
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 31 of 33

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

**APPENDIX E - SYSTEM VALIDATION**

<b>Company:</b>	<b>Cobra Electronics Corporation</b>	<b>FCC ID:</b>	<b>BBOLI5600</b>	<b>IC ID:</b>	<b>906B-LI5600</b>	
<b>Model(s):</b>	<b>LI5590/LI5600/LI5625/LI5650/LI5675</b>	<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>				
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 32 of 33

	Date of Evaluation:	July 30, 2007	Document Serial No.:	SV450B-073007-R1.0	
	Evaluation Type:	System Validation	Validation Dipole:	450 MHz	Fluid Type:

## 450 MHz SYSTEM VALIDATION

Type:

**450 MHz Validation Dipole**

Asset Number:

**00024**

Serial Number:

**136**

Place of Validation:

**Celltech Labs Inc.**

Date of Validation:

**July 30, 2007**

**Celltech Labs Inc. certifies that the 450 MHz System Validation was performed on the date indicated above.**

Validated by:



**Cheri Frangiadakis**

Approved by:

**Sean Johnston**



## 2. Validation Dipole VSWR Data

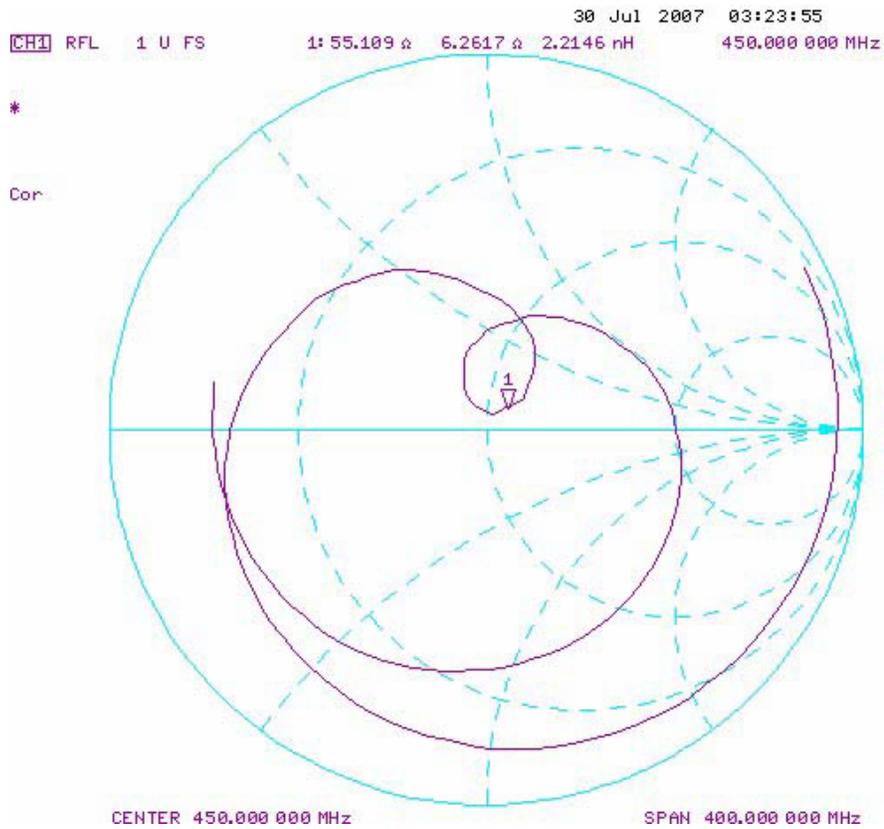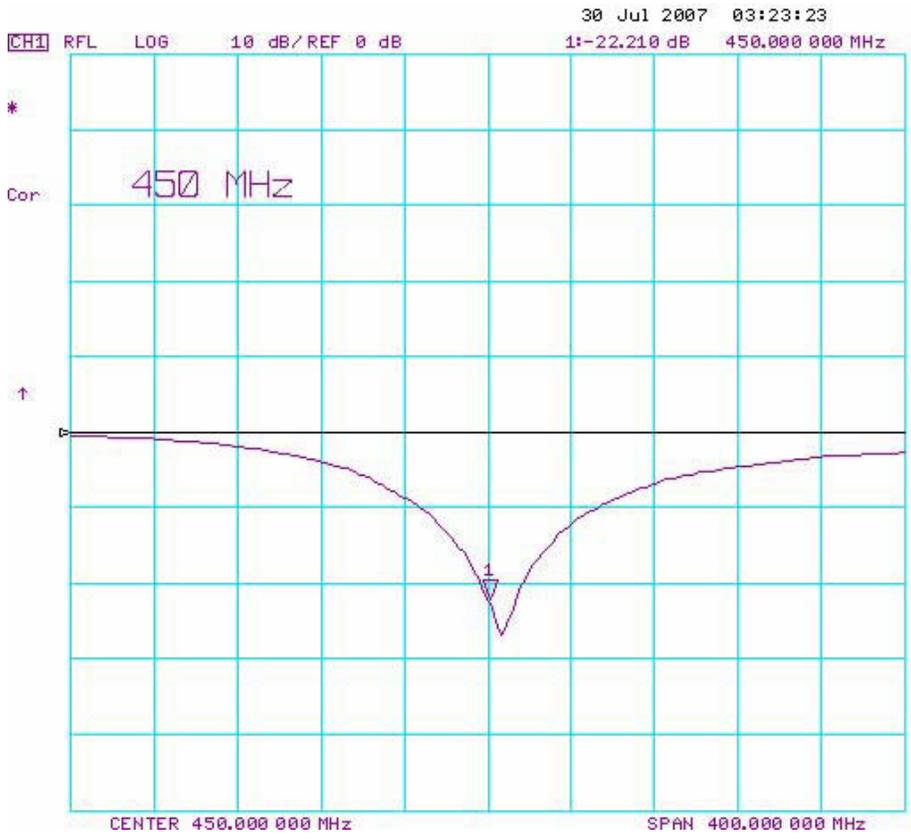

### 3. Validation Dipole Dimensions

Frequency (MHz)	L (mm)	h (mm)	d (mm)
300	396.0	250.0	6.0
<b>450</b>	<b>270.0</b>	<b>167.0</b>	<b>6.0</b>
835	161.0	89.8	3.6
900	149.0	83.3	3.6
1450	89.1	51.7	3.6
1800	72.0	41.7	3.6
1900	68.0	39.5	3.6
2000	64.5	37.5	3.6
2450	51.5	30.4	3.6
3000	41.5	25.0	3.6

### 4. Validation Phantom

The validation phantom (planar) was constructed using relatively low-loss tangent Plexiglas material.

The inner dimensions of the validation phantom are as follows:


Length: 83.5 cm  
Width: 36.9 cm  
Height: 21.8 cm

The bottom section of the validation phantom is constructed of  $6.2 \pm 0.1$ mm Plexiglas.

### 5. Test Equipment List

TEST EQUIPMENT	ASSET NO.	SERIAL NO.	DATE OF CAL.	CAL. DUE DATE
SPEAG DASY4 Measurement Server	00158	1078	N/A	N/A
SPEAG Robot	00046	599396-01	N/A	N/A
SPEAG DAE4	00019	353	10Jul07	10Jul08
SPEAG ET3DV6 E-Field Probe	00016	1387	16Mar07	16Mar08
450 MHz Validation Dipole	00024	136	30Jul07	30Jul08
Plexiglas Validation Planar Phantom	00157	137	N/A	N/A
HP 85070C Dielectric Probe Kit	00033	US39240170	N/A	N/A
Gigatronics 8652A Power Meter	00007	1835272	26Mar07	26Mar08
Gigatronics 80701A Power Sensor	00014	1833699	22Jan07	22Jan08
Gigatronics 80701A Power Sensor	00109	1834366	26Mar07	26Mar08
HP 8753ET Network Analyzer	00134	US39170292	20Apr07	20Apr08
HP 8648D Signal Generator	00005	3847A00611	NCR	NCR
Amplifier Research 5S1G4 Power Amplifier	00106	26235	NCR	NCR

## 6. Dimensions of Plexiglas Planar Phantom

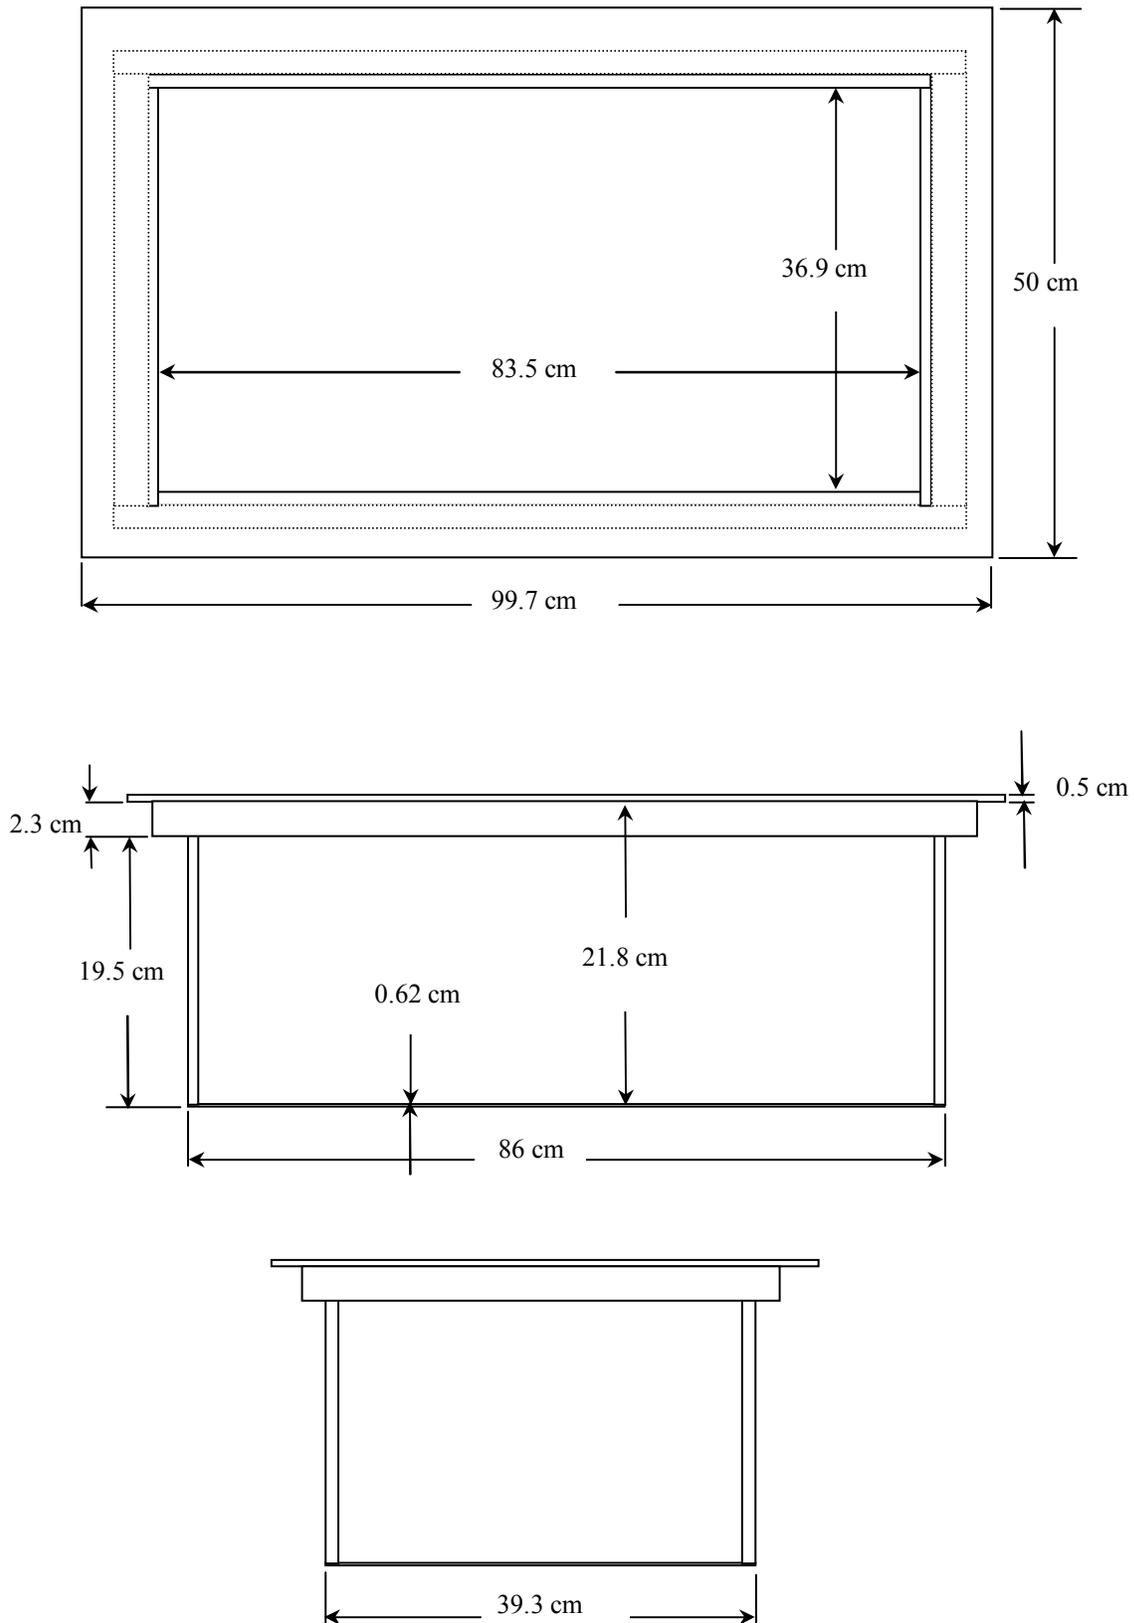

	Date of Evaluation:	July 30, 2007	Document Serial No.:	SV450B-073007-R1.0	
	Evaluation Type:	System Validation	Validation Dipole:	450 MHz	Fluid Type:

**7. 450 MHz System Validation Setup**



	Date of Evaluation:	July 30, 2007	Document Serial No.:	SV450B-073007-R1.0	
	Evaluation Type:	System Validation	Validation Dipole:	450 MHz	Fluid Type:


**8. 450 MHz Validation Dipole Setup**



## 9. SAR Measurement

Measurements were made using a dosimetric E-field probe ET3DV6 (S/N: 1387, Conversion Factor 7.0). The SAR measurement was performed with the E-field probe in mechanical detection mode only. The setup and determination of the forward power into the dipole was performed using the procedures described below.

First the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the dipole connector (X). The signal generator is adjusted for the desired forward power at the dipole connector (taking into account the attenuation of Att1) as read by power meter PM2. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2. If the signal generator does not allow adjustment in 0.01dB steps, the remaining difference at PM2 must be taken into consideration. PM3 records the reflected power from the dipole to ensure that the value is not changed from the previous value. The reflected power should be 20dB below the forward power.

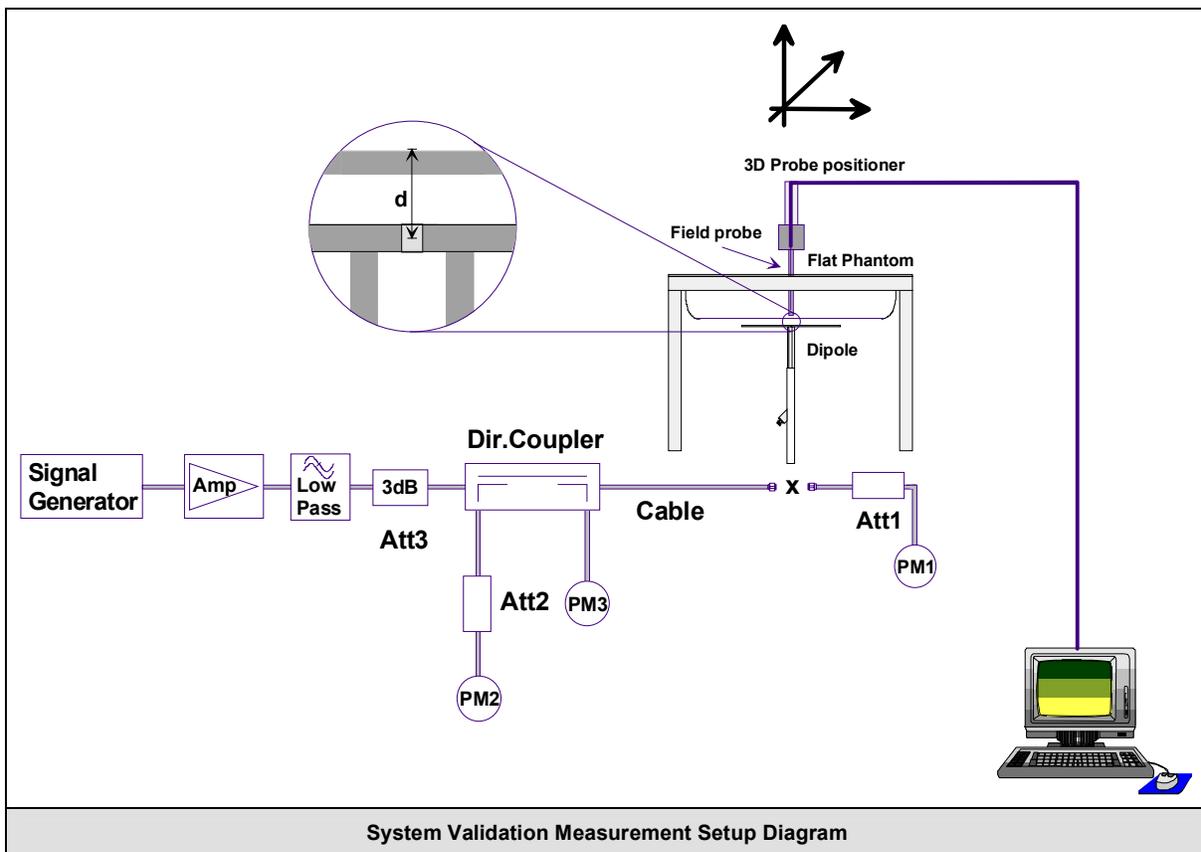

## 10. Measurement Conditions

The validation phantom was filled with 450 MHz Brain tissue simulant.

Relative Permittivity: 43.1 (-0.9% deviation from target)  
 Conductivity: 0.85 mho/m (-2.3% deviation from target)  
 Fluid Temperature: 23.1°C (Start of Test) / 23.3°C (End of Test)  
 Fluid Depth: ≥ 15.0 cm

Environmental Conditions:

Ambient Temperature: 24.5°C  
 Barometric Pressure: 101.1 kPa  
 Humidity: 31%

The 450 MHz Brain tissue simulant consisted of the following ingredients:

Ingredient	Percentage by weight	
Water	38.56%	
Sugar	56.32%	
Salt	3.95%	
HEC	0.98%	
Dowicil 75	0.19%	
<b>IEEE Target Dielectric Parameters:</b>	<b><math>\epsilon_r = 43.5 (+/- 5\%)</math></b>	<b><math>\sigma = 0.87 \text{ S/m } (+/- 5\%)</math></b>

## 11. System Validation SAR Results

SAR @ 0.25W Input averaged over 1g (W/kg)				SAR @ 1W Input averaged over 1g (W/kg)			
IEEE/IEC Target		Measured	Deviation	IEEE/IEC Target		Measured	Deviation
1.23	+/- 10%	1.29	+4.9%	4.9	+/- 10%	5.16	+5.3%
SAR @ 0.25W Input averaged over 10g (W/kg)				SAR @ 1W Input averaged over 10g (W/kg)			
IEEE/IEC Target		Measured	Deviation	IEEE/IEC Target		Measured	Deviation
0.825	+/- 10%	0.832	+0.8%	3.3	+/- 10%	3.33	+1.0%
Frequency (MHz)	1 g SAR	10 g SAR	Local SAR at surface (above feed-point)	Local SAR at surface (y = 2 cm offset from feed-point) <sup>2</sup>			
300	3.0	2.0	4.4	2.1			
450	4.9	3.3	7.2	3.2			
835	9.5	6.2	4.1	4.9			
900	10.8	6.9	16.4	5.4			
1450	29.0	16.0	50.2	6.5			
1800	38.1	19.8	69.5	6.8			
1900	39.7	20.5	72.1	6.6			
2000	41.1	21.1	74.6	6.5			
2450	52.4	24.0	104.2	7.7			
3000	63.8	25.7	140.2	9.5			
Numerical reference SAR values for reference dipole and flat phantom normalized to 1 W (IEEE 1528-2003; IEC 62209-1:2005)							

	Date of Evaluation:	July 30, 2007	Document Serial No.:	SV450B-073007-R1.0
	Evaluation Type:	System Validation	Validation Dipole:	450 MHz
			Fluid Type:	Brain

## System Validation - 450 MHz Dipole - July 30, 2007 - HSL

**DUT: Dipole 450 MHz; Asset: 00024; Serial: 136; Validation: 07/30/2007**

Ambient Temp: 24.5°C; Fluid Temp: 23.1°C; Barometric Pressure: 101.1 kPa; Humidity: 31%

Communication System: CW

Forward Conducted Power: 250 mW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used:  $f = 450 \text{ MHz}$ ;  $\sigma = 0.85 \text{ mho/m}$ ;  $\epsilon_r = 43.1$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1387; ConvF(7, 7, 7); Calibrated: 16/03/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 10/07/2007
- Phantom: Validation Planar; Type: Plexiglas; Serial: 137
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

### 450 MHz Dipole - System Validation/Area Scan (6x11x1):

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.35 mW/g

### 450 MHz Dipole - System Validation/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$


Reference Value = 39.3 V/m; Power Drift = 0.042 dB

Peak SAR (extrapolated) = 2.24 W/kg

**SAR(1 g) = 1.29 mW/g; SAR(10 g) = 0.832 mW/g**

Maximum value of SAR (measured) = 1.37 mW/g

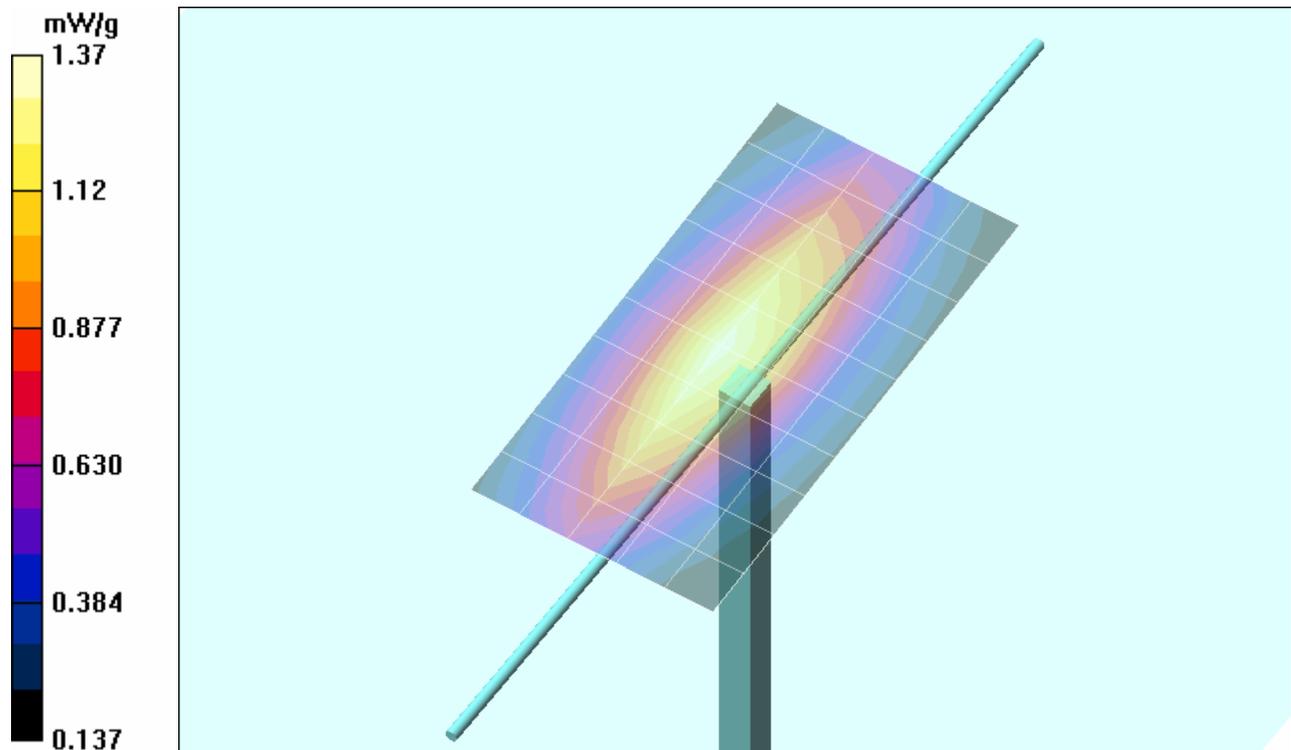

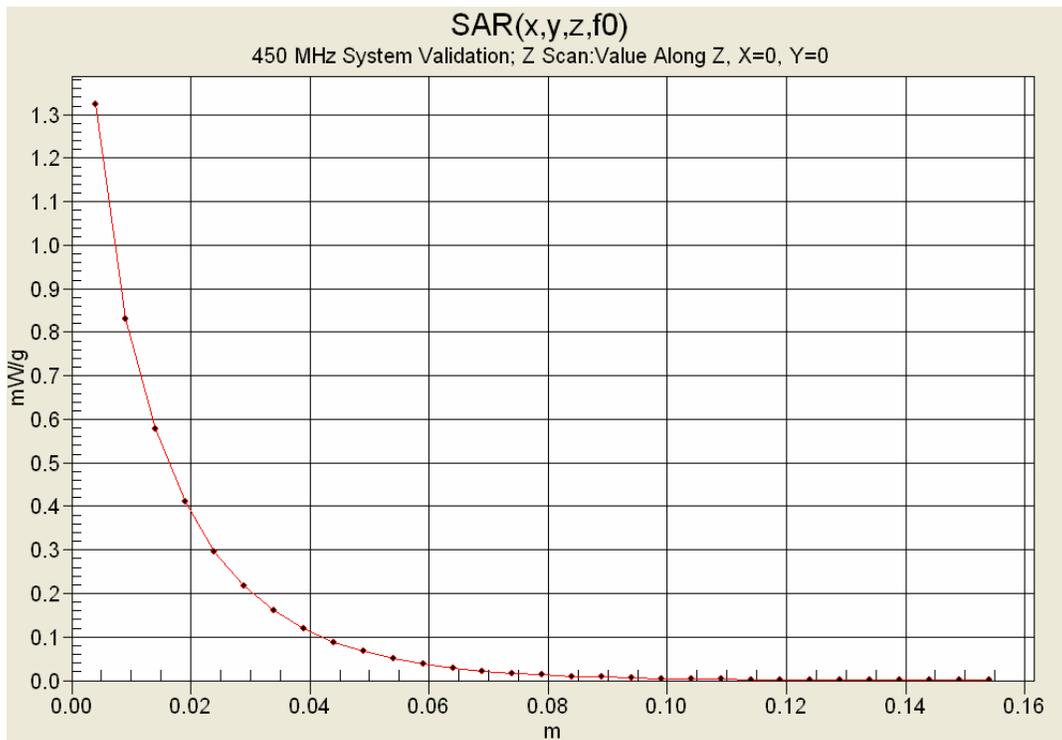

## 12. Measured Fluid Dielectric Parameters

### System Validation - 450 MHz (Brain)

\*\*\*\*\*

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

Mon 30/Jul/2007

Frequency (GHz)

FCC\_eH FCC OET 65 Supplement C (June 2001) Limits for Head Epsilon

FCC\_sH FCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eH	FCC_sH	Test_e	Test_s
0.3500	44.70	0.87	45.67	0.76
0.3600	44.58	0.87	45.22	0.77
0.3700	44.46	0.87	45.13	0.78
0.3800	44.34	0.87	44.88	0.79
0.3900	44.22	0.87	44.58	0.80
0.4000	44.10	0.87	44.42	0.81
0.4100	43.98	0.87	44.21	0.82
0.4200	43.86	0.87	43.93	0.82
0.4300	43.74	0.87	43.66	0.83
0.4400	43.62	0.87	43.15	0.84
0.4500	43.50	0.87	43.09	0.85
0.4600	43.45	0.87	42.96	0.86
0.4700	43.40	0.87	42.63	0.87
0.4800	43.34	0.87	42.72	0.87
0.4900	43.29	0.87	42.45	0.89
0.5000	43.24	0.87	42.18	0.90
0.5100	43.19	0.87	42.03	0.90
0.5200	43.14	0.88	41.77	0.91
0.5300	43.08	0.88	41.78	0.92
0.5400	43.03	0.88	41.42	0.93
0.5500	42.98	0.88	41.19	0.93

### 13. Measurement Uncertainties

UNCERTAINTY BUDGET FOR SYSTEM VALIDATION						
Error Description	Uncertainty Value $\pm\%$	Probability Distribution	Divisor	ci 1g	Uncertainty Value $\pm\%$ (1g)	$V_i$ or $V_{eff}$
<b>Measurement System</b>						
Probe calibration (450 MHz)	8.0	Normal	1	1	8.0	$\infty$
Axial isotropy of the probe	4.7	Rectangular	1.732050808	1	2.7	$\infty$
Spherical isotropy of the probe	0	Rectangular	1.732050808	1	0.0	$\infty$
Spatial resolution	0	Rectangular	1.732050808	1	0.0	$\infty$
Boundary effects	1	Rectangular	1.732050808	1	0.6	$\infty$
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	$\infty$
Detection limit	1	Rectangular	1.732050808	1	0.6	$\infty$
Readout electronics	0.3	Normal	1	1	0.3	$\infty$
Response time	0	Rectangular	1.732050808	1	0.0	$\infty$
Integration time	0	Rectangular	1.732050808	1	0.0	$\infty$
RF ambient conditions	3	Rectangular	1.732050808	1	1.7	$\infty$
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	$\infty$
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	$\infty$
Extrapolation & integration	1	Rectangular	1.732050808	1	0.6	$\infty$
<b>Test Sample Related</b>						
Dipole Positioning	2	Normal	1.732050808	1	1.2	$\infty$
Power & Power Drift	4.7	Normal	1.732050808	1	2.7	$\infty$
<b>Phantom and Setup</b>						
Phantom uncertainty	4	Rectangular	1.732050808	1	2.3	$\infty$
Liquid conductivity (target)	5	Rectangular	1.732050808	0.64	1.8	$\infty$
Liquid conductivity (measured)	5	Normal	1	0.64	3.2	$\infty$
Liquid permittivity (target)	5	Rectangular	1.732050808	0.6	1.7	$\infty$
Liquid permittivity (measured)	5	Normal	1	0.6	3.0	$\infty$
<b>Combined Standard Uncertainty</b>					<b>11.20</b>	
<b>Expanded Uncertainty (k=2)</b>					<b>22.39</b>	
<b>Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003</b>						

	<u>Date(s) of Evaluation</u> October 09, 2007	<u>Test Report Serial No.</u> 100907BBO-T858-S95U	<u>Test Report Revision No.</u> Revision 1.0	
	<u>Test Report Issue Date</u> October 15, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

**APPENDIX F - PROBE CALIBRATION**

<b>Company:</b>	<b>Cobra Electronics Corporation</b>	<b>FCC ID:</b>	<b>BBOLI5600</b>	<b>IC ID:</b>	<b>906B-LI5600</b>	
<b>Model(s):</b>	<b>LI5590/LI5600/LI5625/LI5650/LI5675</b>	<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>				
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 33 of 33



Accredited by the Swiss Federal Office of Metrology and Accreditation  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Celltech Labs**

Certificate No: **ET3-1387\_Mar07**

## CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1387**

Calibration procedure(s) **QA CAL-01.v5  
Calibration procedure for dosimetric E-field probes**

Calibration date: **March 16, 2007**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Power sensor E4412A	MY41495277	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Power sensor E4412A	MY41498087	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-06 (METAS, No. 217-00592)	Aug-07
Reference 20 dB Attenuator	SN: S5086 (20b)	4-Apr-06 (METAS, No. 251-00558)	Apr-07
Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-06 (METAS, No. 217-00593)	Aug-07
Reference Probe ES3DV2	SN: 3013	4-Jan-07 (SPEAG, No. ES3-3013_Jan07)	Jan-08
DAE4	SN: 654	21-Jun-06 (SPEAG, No. DAE4-654_Jun06)	Jun-07

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-06)	In house check: Oct-07

	Name	Function	Signature
Calibrated by:	<b>Katja Pokovic</b>	<b>Technical Manager</b>	
Approved by:	<b>Fin Bomholt</b>	<b>R&amp;D Director</b>	

Issued: March 19, 2007

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Federal Office of Metrology and Accreditation  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the E<sup>2</sup>-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* *frequency\_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

# Probe ET3DV6

## SN:1387

Manufactured:	September 21, 1999
Last calibrated:	March 16, 2006
Recalibrated:	March 16, 2007

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

**DASY - Parameters of Probe: ET3DV6 SN:1387****Sensitivity in Free Space<sup>A</sup>****Diode Compression<sup>B</sup>**

NormX	1.68 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	91 mV
NormY	1.73 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	92 mV
NormZ	1.73 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	92 mV

**Sensitivity in Tissue Simulating Liquid (Conversion Factors)**

Please see Page 8.

**Boundary Effect**

**TSL                      835 MHz      Typical SAR gradient: 5 % per mm**

Sensor Center to Phantom Surface Distance		<b>3.7 mm</b>	<b>4.7 mm</b>
SAR <sub>be</sub> [%]	Without Correction Algorithm	8.2	3.7
SAR <sub>be</sub> [%]	With Correction Algorithm	0.8	0.9

**Sensor Offset**

Probe Tip to Sensor Center                      **2.7 mm**


**The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.**

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Page 8).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.




# Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

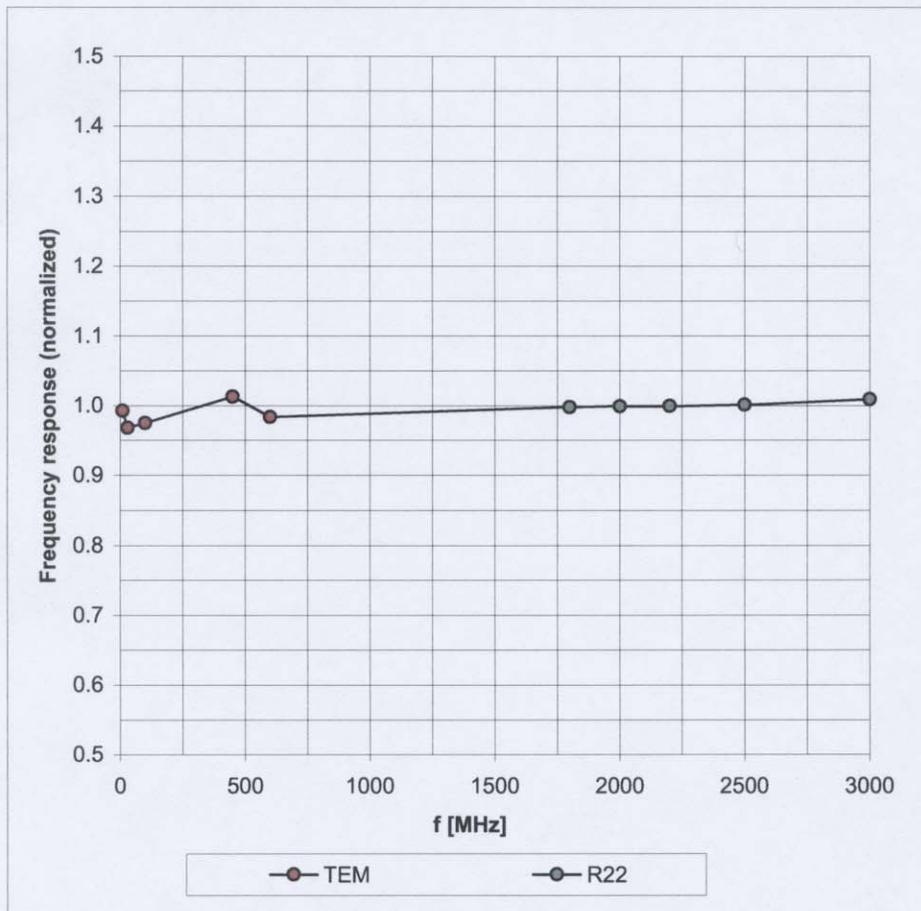



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)

### Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

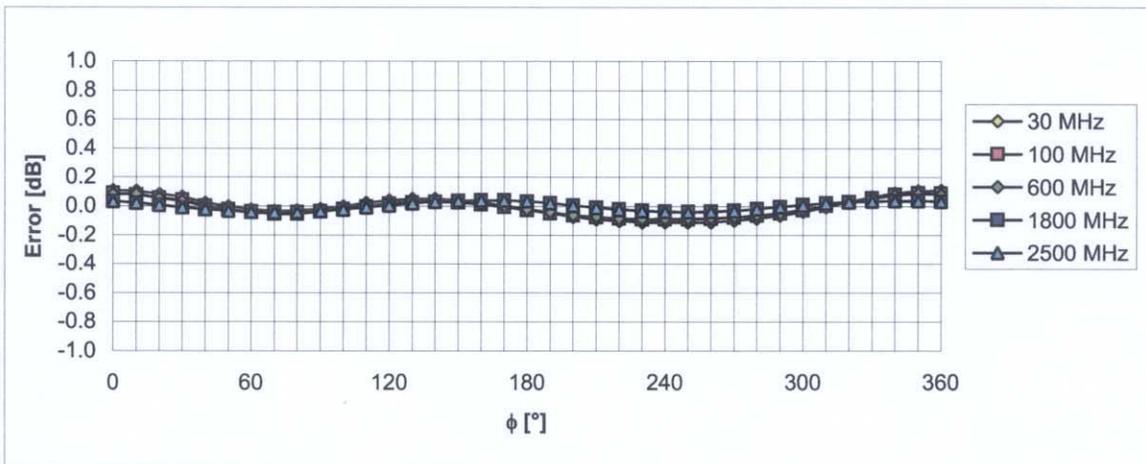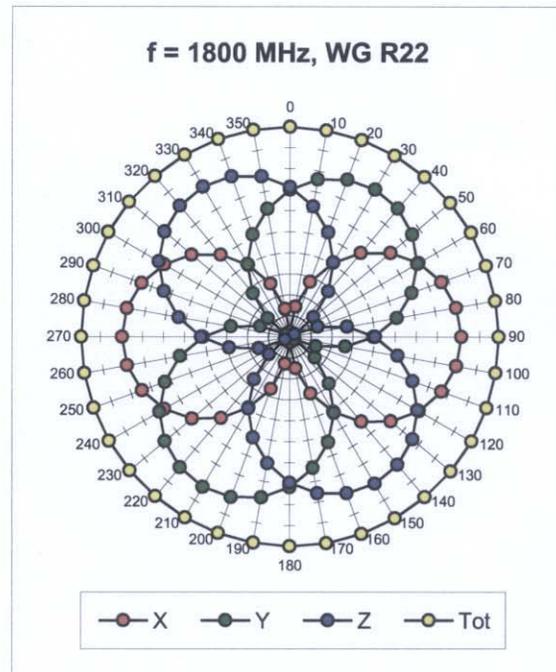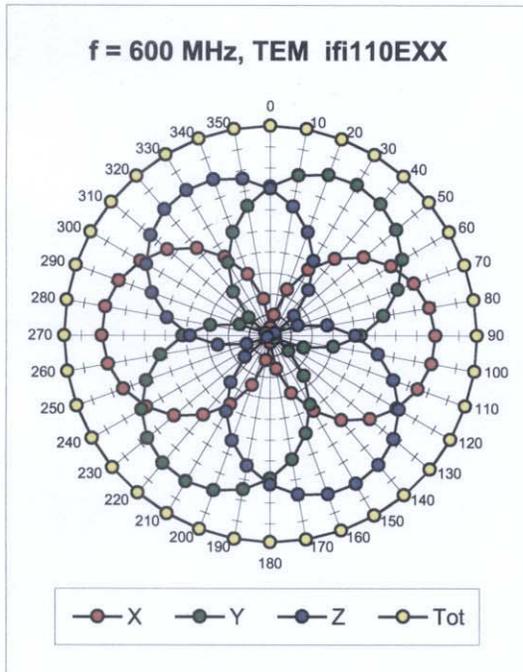



Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

## Dynamic Range $f(SAR_{head})$ (Waveguide R22, $f = 1800$ MHz)

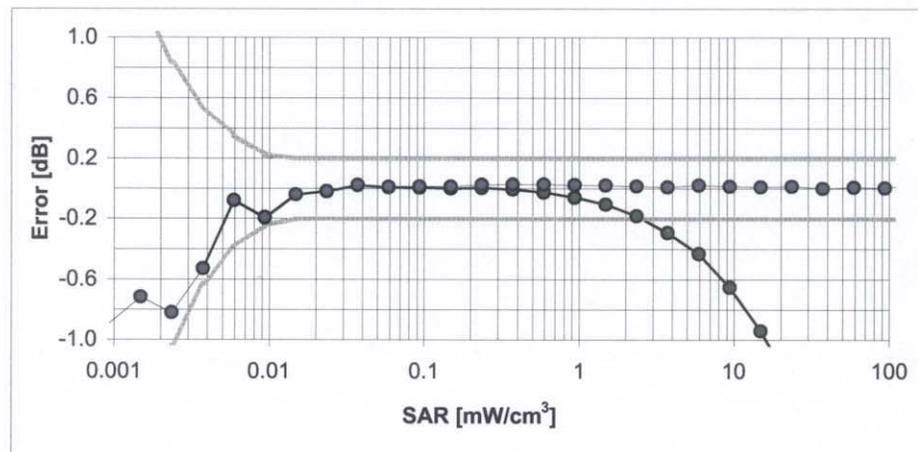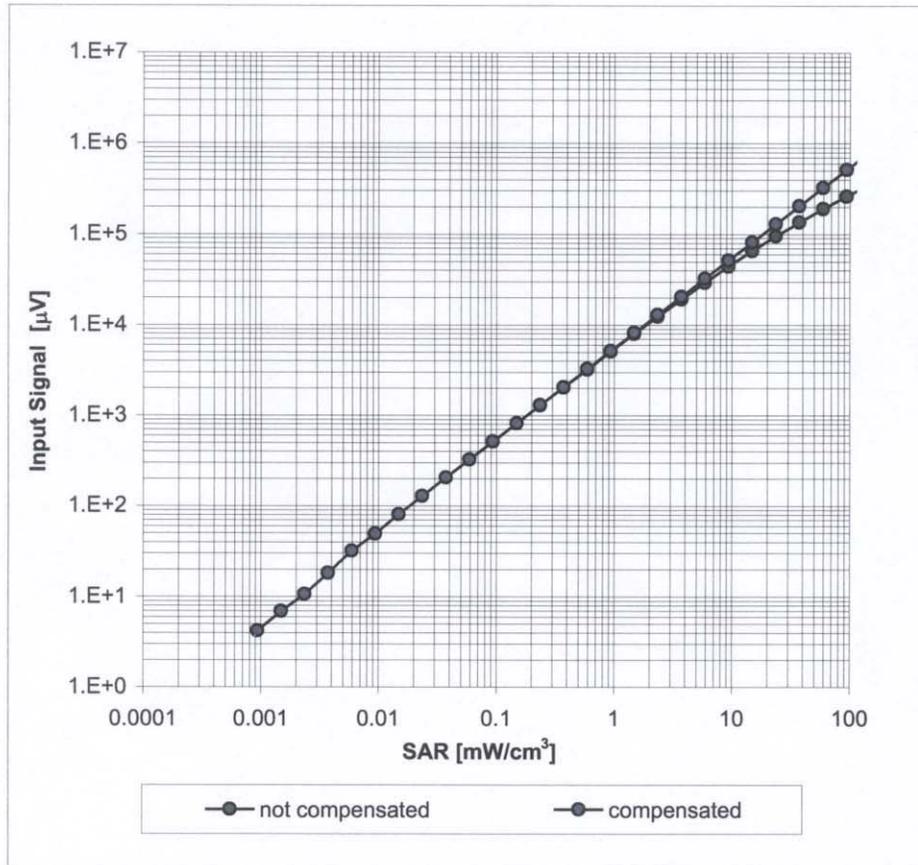

**Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )**

## Conversion Factor Assessment

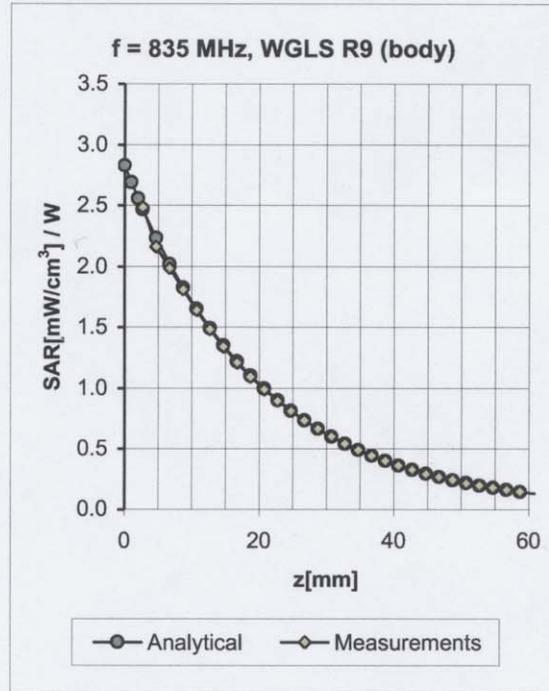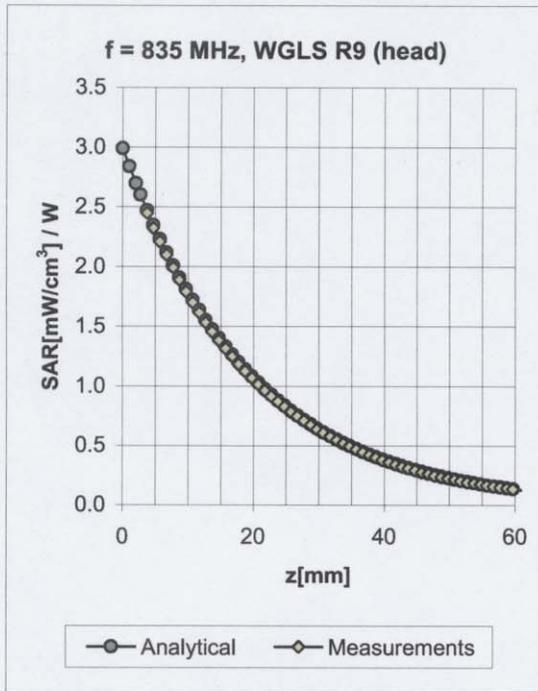


f [MHz]	Validity [MHz] <sup>c</sup>	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
835	± 50 / ± 100	Head	41.5 ± 5%	0.90 ± 5%	0.36	2.45	6.25 ± 11.0% (k=2)
835	± 50 / ± 100	Body	55.2 ± 5%	0.97 ± 5%	0.34	2.66	6.18 ± 11.0% (k=2)

<sup>c</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

# Deviation from Isotropy in HSL

Error ( $\phi, \vartheta$ ),  $f = 900$  MHz

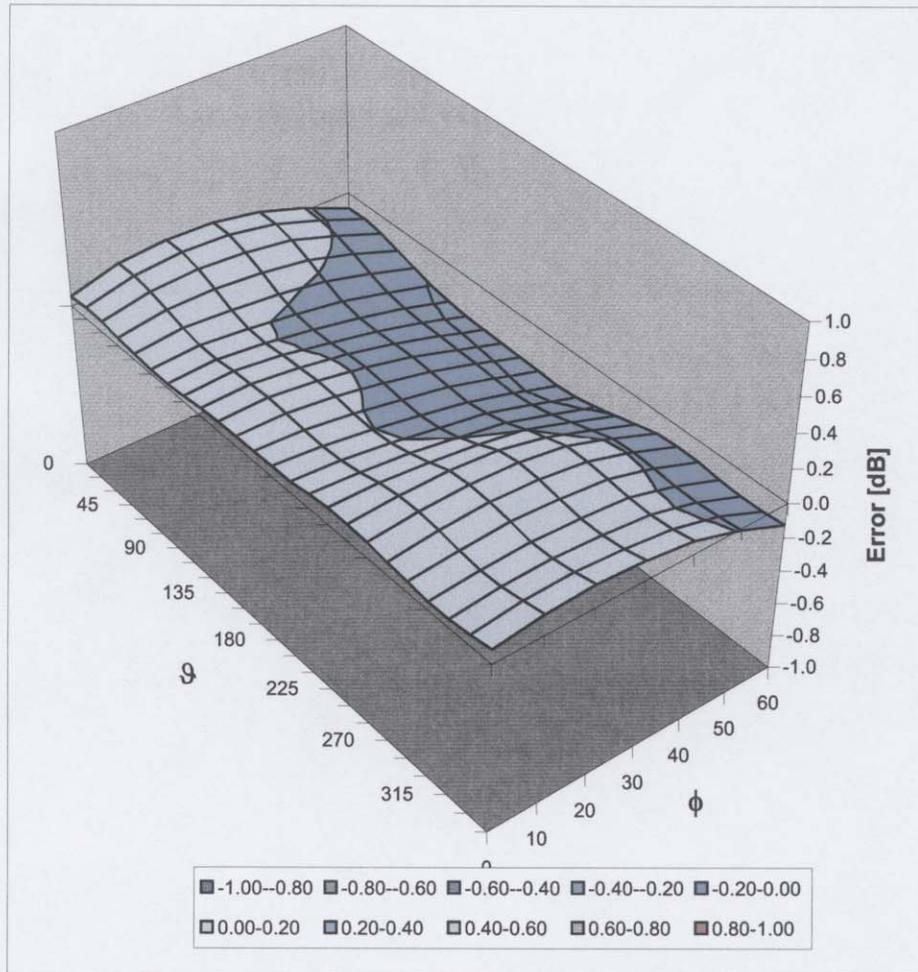

Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  ( $k=2$ )


## **Additional Conversion Factors**

**for Dosimetric E-Field Probe**

Type:	<b>ET3DV6</b>
Serial Number:	<b>1387</b>
Place of Assessment:	<b>Zurich</b>
Date of Assessment:	<b>March 20, 2007</b>
Probe Calibration Date:	<b>March 16, 2007</b>

Schmid & Partner Engineering AG hereby certifies that conversion factor(s) of this probe have been evaluated on the date indicated above. The assessment was performed using the FDTD numerical code SEMCAD of Schmid & Partner Engineering AG. Since the evaluation is coupled with measured conversion factors, it has to be recalculated yearly, i.e., following the re-calibration schedule of the probe. The uncertainty of the numerical assessment is based on the extrapolation from measured value at 900 MHz.

Assessed by:



**Dosimetric E-Field Probe ET3DV6 SN:1387**Conversion factor ( $\pm$  standard deviation)

<b>f = 150 MHz</b>	ConvF	<b>7.8 <math>\pm</math> 10 %</b>	$\epsilon_r = 52.3 \pm 5\%$ $\sigma = 0.76 \pm 5\%$ mho/m (head tissue)
<b>f = 300 MHz</b>	ConvF	<b>7.3 <math>\pm</math> 9 %</b>	$\epsilon_r = 45.3 \pm 5\%$ $\sigma = 0.87 \pm 5\%$ mho/m (head tissue)
<b>f = 450 MHz</b>	ConvF	<b>7.0 <math>\pm</math> 8 %</b>	$\epsilon_r = 43.5 \pm 5\%$ $\sigma = 0.87 \pm 5\%$ mho/m (head tissue)
<b>f = 750 MHz</b>	ConvF	<b>6.3 <math>\pm</math> 8 %</b>	$\epsilon_r = 41.8 \pm 5\%$ $\sigma = 0.89 \pm 5\%$ mho/m (head tissue)
<b>f = 150 MHz</b>	ConvF	<b>7.8 <math>\pm</math> 10 %</b>	$\epsilon_r = 61.9 \pm 5\%$ $\sigma = 0.80 \pm 5\%$ mho/m (body tissue)
<b>f = 450 MHz</b>	ConvF	<b>6.9 <math>\pm</math> 8 %</b>	$\epsilon_r = 56.7 \pm 5\%$ $\sigma = 0.94 \pm 5\%$ mho/m (body tissue)
<b>f = 750 MHz</b>	ConvF	<b>6.0 <math>\pm</math> 8 %</b>	$\epsilon_r = 55.4 \pm 5\%$ $\sigma = 0.96 \pm 5\%$ mho/m (body tissue)

**Important Note:**

For numerically assessed probe conversion factors, parameters Alpha and Delta in the DASY software must have the following entries: Alpha = 0 and Delta = 1.

Please see also Section 4.7 of the DASY4 Manual.