

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

RF EXPOSURE EVALUATION

SPECIFIC ABSORPTION RATE

SAR TEST REPORT

FOR THE

COBRA PORTABLE FM UHF FRS/GMRS PTT RADIO TRANSCEIVER

MODEL(S): PR5000, PR5020, PR5050

FCC ID: BBOPR5000

IC: 906B-PR5000

Test Report Serial Number

**081905BBO-T663-S95F
Issue 1.1**

Test Report Issue Date

September 13, 2005

Test Lab

**Celltech Compliance Testing & Engineering Lab
(Celltech Labs Inc.)
1955 Moss Court
Kelowna, BC
Canada
V1Y 9L3**

<p align="center">Test Report Prepared by:</p> <p align="center"><i>Cheri Haight</i></p> <hr/> <p align="center">Cheri Haight Test Report Writer Celltech Labs Inc.</p>	<p align="center">Test Report Approved By:</p> <p align="center"><i>[Signature]</i></p> <hr/> <p align="center">Jonathan Hughes General Manager Celltech Labs Inc.</p>
---	--

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure SAR	FCC 2.1093	IC RSS-102

DECLARATION OF COMPLIANCE SAR RF EXPOSURE EVALUATION

<p>Test Lab</p> <p>CELLTECH LABS INC. Testing and Engineering Services 1955 Moss Court Kelowna, B.C. Canada V1Y 9L3 Phone: 250-448-7047 Fax: 250-448-7046 e-mail: info@celltechlabs.com web site: www.celltechlabs.com</p>	<p>Applicant Information</p> <p>COBRA ELECTRONICS CORPORATION 6500 West Cortland Street Chicago, IL 60707 United States</p>
<p>FCC IDENTIFIER: BBOPR5000 IC IDENTIFIER: 906B-PR5000 Model(s): PR5000, PR5020, PR5050</p>	
<p>Rule Part(s): FCC 47 CFR §2.1093; IC RSS-102 Issue 1 (Provisional) Test Procedure(s): FCC OET Bulletin 65, Supplement C (Edition 01-01) Device Description: Portable UHF FRS/GMRS PTT Radio Transceiver Modulation Type: FM (UHF)</p>	
<p>Tx Frequency Range(s): 462.5500 - 462.7250 MHz (GMRS Channels 15-22) 462.5625 - 462.7125 MHz (FRS/GMRS Channels 1-7) 467.5625 - 467.7125 MHz (FRS Channels 8-14) Max. RF Output Power Tested: 1.42 Watts ERP (462.7250 MHz) Antenna Type(s) Tested: Fixed Stubby Battery Type(s) Tested: NiMH AA x4 (1.2 V, 1200 mAh) NiCd AA x4 (1.2 V, 600 mAh) Alkaline Duracell Procell AA x4 (1.5 V, 1250 mAh)</p>	
<p>Body-Worn Accessories Tested: Plastic Belt-Clip Audio Accessories Tested: Generic Earbud with Lapel-Microphone</p>	
<p>Max. SAR Level(s) Evaluated: 1.04 W/kg - Face-held (50% duty cycle) 1.45 W/kg - Body-worn (50% duty cycle)</p>	

Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada's Safety Code 6. The device was tested in accordance with the measurement standards and procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01) and Industry Canada RSS-102 Issue 1 (Provisional) for the General Population / Uncontrolled Exposure environment. All measurements were performed in accordance with the SAR system manufacturer recommendations.

I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc. The results and statements contained in this report pertain only to the device(s) evaluated.

Tested By:



Sean Johnston
Compliance Technologist
Celltech Labs Inc.

Reviewed By:



Spencer Watson
Senior Compliance Technologist
Celltech Labs Inc.



Applicant: Cobra Electronics Corporation	FCC ID: BBOPR5000	IC ID: 906B-PR5000	
Model(s): PR5000, PR5020, PR5050	Portable FRS/GMRS PTT Radio Transceiver	462.5500 - 467.7125 MHz	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.	
			2 of 43

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

TABLE OF CONTENTS	
1.0 INTRODUCTION	4
2.0 DESCRIPTION OF DEVICE UNDER TEST (DUT)	4
3.0 SAR MEASUREMENT SYSTEM	5
4.0 MEASUREMENT SUMMARY	6
5.0 DETAILS OF SAR EVALUATION	7
6.0 EVALUATION PROCEDURES	7
7.0 SYSTEM PERFORMANCE CHECK	8
8.0 SIMULATED EQUIVALENT TISSUES	9
9.0 SAR SAFETY LIMITS	9
10.0 ROBOT SYSTEM SPECIFICATIONS	10
11.0 PROBE SPECIFICATION (ET3DV6)	11
12.0 PLANAR PHANTOM	11
13.0 VALIDATION PLANAR PHANTOM	11
14.0 DEVICE HOLDER	11
15.0 TEST EQUIPMENT LIST	12
16.0 MEASUREMENT UNCERTAINTIES	13
17.0 REFERENCES	15
APPENDIX A - SAR MEASUREMENT DATA	16
APPENDIX B - SYSTEM PERFORMANCE CHECK DATA	26
APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS	31
APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS	34
APPENDIX E - SYSTEM VALIDATION	42
APPENDIX F - PROBE CALIBRATION	43

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

1.0 INTRODUCTION

This measurement report demonstrates compliance of the Cobra Electronics Corporation Model(s): PR5000, PR5020, PR5050 Portable UHF FRS/GMRS PTT Radio Transceiver FCC ID: BBOPR5000 with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]), and Health Canada's Safety Code 6 (see reference [2]) for the General Population / Uncontrolled Exposure environment. The test procedures described in FCC OET Bulletin 65, Supplement C (Edition 01-01) (see reference [3]) and IC RSS-102 Issue 1 (Provisional) (see reference [4]), were employed. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used, and the provisions of the rules are included within this test report.

2.0 DESCRIPTION OF DEVICE UNDER TEST (DUT)

Rule Part(s)	FCC 47 CFR §2.1093		
	IC RSS-102 Issue 1 (Provisional)		
Test Procedure(s)	FCC OET Bulletin 65, Supplement C (01-01)		
Device Description	Portable FM UHF FRS/GMRS PTT Radio Transceiver		
FCC IDENTIFIER	BBOPR5000		
IC IDENTIFIER	906B-PR5000		
Model(s)	PR5000	PR5020	PR5050
Serial No. of Test Sample	H507000001	Identical Prototype	
Modulation Type	FM (UHF)		
Tx Frequency Range(s)	462.5500 - 462.7250 MHz	GMRS Channels 15-22	
	462.5625 - 462.7125 MHz	FRS/GMRS Channels 1-7	
	467.5625 - 467.7125 MHz	FRS Channels 8-14	
Max. RF Output Power Tested	1.42 Watts ERP	462.7250 MHz	
Antenna Type(s) Tested	External Fixed Stubby		
Battery Type(s) Tested	NiMH AA (x4)	1.2 V	1200 mAh
	NiCd AA (x4)	1.2 V	600 mAh
	Alkaline AA (x4)	1.5 V	Duracell Procell 1250 mAh
Body-Worn Accessories Tested	Plastic Belt-Clip		
Audio Accessories Tested	Generic Earbud with Lapel-Microphone		

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOPR5000	IC ID:	906B-PR5000	
Model(s):	PR5000, PR5020, PR5050	Portable FRS/GMRS PTT Radio Transceiver	462.5500 - 467.7125 MHz			
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					4 of 43

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

3.0 SAR MEASUREMENT SYSTEM

Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for brain and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE3 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.



DASY4 SAR Measurement System with validation phantom



DASY4 SAR Measurement System with Plexiglas planar phantom

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOPR5000	IC ID:	906B-PR5000	
Model(s):	PR5000, PR5020, PR5050	Portable FRS/GMRS PTT Radio Transceiver	462.5500 - 467.7125 MHz			
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					5 of 43

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure SAR	FCC 2.1093	IC RSS-102

4.0 MEASUREMENT SUMMARY

SAR EVALUATION RESULTS

Test Type	Test Date	Freq. (MHz)	Chan.	Test Mode	Battery Type	Antenna Position	Body-worn Accessories	Separation Distance to Planar Phantom (cm)	ERP Start Power (Watts)	Measured SAR 1g (W/kg)		SAR Drift During Test (dB)	Scaled SAR 1g (W/kg) with droop		
										Duty Cycle			Duty Cycle		
										100%	50%		100%	50%	
Face	Sept 6	462.7250	22	CW	Alkaline	Fixed	--	2.5	1.42	1.67	0.835	-0.937	2.07	1.04	
Face	Sept 6	462.7250	22	CW	NiMH	Fixed	--	2.5	1.42	1.47	0.735	-0.818	1.77	0.887	
Face	Sept 6	462.7250	22	CW	NiCd	Fixed	--	2.5	1.42	1.33	0.665	-0.690	1.56	0.780	
Body	Sept 2	462.7250	22	CW	Alkaline	Fixed	Belt-Clip	0.7	1.42	2.44	1.22	-0.751	2.90	1.45	
							Ear-Mic								
Body	Sept 2	462.7250	22	CW	NiMH	Fixed	Belt-Clip	0.7	1.42	2.10	1.05	-0.657	2.44	1.22	
							Ear-Mic								
Body	Sept 2	462.7250	22	CW	NiCd	Fixed	Belt-Clip	0.7	1.42	1.90	0.950	-0.467	2.12	1.06	
							Ear-Mic								
ANSI / IEEE C95.1 1999 SAFETY LIMIT					BRAIN / BODY: 1.6 W/kg (averaged over 1 gram)					Spatial Peak Uncontrolled Exposure / General Population					
Test Date(s)		Sept. 06, 2005			Sept. 02, 2005			Measured Fluid Type		Brain	Body	Unit			
Dielectric Constant ϵ_r	450 MHz Brain				450 MHz Body				Atmospheric Pressure		101.7	101.5	kPa		
	IEEE Target	Meas.	Dev.	IEEE Target	Meas.	Dev.	Relative Humidity		30	42	%				
	43.5	± 5%	44.4	+2.1%	56.7	± 5%	56.8	+0.2%	Ambient Temperature		25.1	24.2	°C		
Conductivity σ (mho/m)	450 MHz Brain				450 MHz Body				Fluid Temperature		22.7	22.6	°C		
	IEEE Target	Meas.	Dev.	IEEE Target	Meas.	Dev.	Fluid Depth		≥ 15	≥ 15	cm				
	0.87	± 5%	0.90	+3.4%	0.94	± 5%	0.96	+2.1%	ρ (Kg/m³)		1000	1000			

Note(s):

- The measurement results were obtained with the DUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.
- The transmission band of the DUT is less than 10 MHz; therefore mid channel data only is reported (per FCC OET Bulletin 65, Supplement C, Edition 01-01 - see reference [3]).
- The power droop measured by the DASY4 system for the duration of the SAR evaluations was added to the measured SAR levels to report scaled SAR results as shown in the above test data table.
- A SAR-versus-Time power drift evaluation was performed in the test configuration that reported the maximum-scaled SAR level (Body-worn, Alkaline battery). See Appendix A (SAR Test Plots) for power drift evaluation plot.
- The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the SAR evaluations. The temperatures reported were consistent for all measurement periods.
- The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using an ALS-PR-DIEL Dielectric Probe Kit and an HP 8753ET Network Analyzer (see Appendix C for measured fluid dielectric parameters).
- The SAR evaluations were performed within 24 hours of the system performance check.

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

5.0 DETAILS OF SAR EVALUATION

The Cobra Electronics Corporation Models: PR5000, PR5020, PR5050 Portable FM UHF FRS/GMRS PTT Radio Transceiver FCC ID: BBOPR5000 was compliant for localized Specific Absorption Rate (General Population / Uncontrolled Exposure) based on the test provisions and conditions described below. The detailed test setup photographs are shown in Appendix D.

1. The DUT was evaluated in a face-held configuration with the front of the radio placed parallel to the outer surface of the planar phantom. A 2.5 cm separation distance was maintained between the front of the DUT and the outer surface of the planar phantom.
2. The DUT was tested in a body-worn configuration with the back of the radio placed parallel to the outer surface of the planar phantom. The attached plastic belt-clip accessory was touching the planar phantom and provided a 0.7 cm separation distance from the back of the DUT to the outer surface of the planar phantom. The DUT was evaluated for body-worn SAR with a generic ear-bud lapel-microphone audio accessory.
3. The RF conducted output power of the DUT could not be measured due to a non-detachable antenna. The DUT was evaluated for SAR at the maximum conducted power level preset by the manufacturer.
4. The DUT was evaluated for SAR at the maximum ERP level measured prior to the SAR evaluation at Celltech Labs' 3-meter Open Area Test Site using the signal substitution method in accordance with ANSI/TIA-603-C-2004 (see reference [6]).
5. The power droop measured by the DASY4 system during the SAR evaluations was added to the measured SAR levels to report scaled SAR results as shown in the test data table (page 6).
6. A SAR-versus-Time power drift evaluation was performed in the test configuration that reported the maximum-scaled SAR level. See Appendix A (SAR Test Plots) for SAR-versus-Time power drift evaluation plot.
7. The area scan evaluation was performed with fully charged batteries. After the area scan was completed the radio was cooled down and the batteries were replaced with fully charged batteries prior to the zoom scan evaluation.
8. The DUT was tested in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle) with the transmit key constantly depressed. For a push-to-talk device the 50% duty cycle compensation reported assumes a transmit/receive cycle of equal time base.
9. The SAR evaluations were performed using a Plexiglas planar phantom.

6.0 EVALUATION PROCEDURES

- a. (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
(ii) For body-worn and face-held devices a planar phantom was used.
- b. The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.
An area scan was determined as follows:
 - c. Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
 - d. A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.
A 1g and 10g spatial peak SAR was determined as follows:
- e. Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix F). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- f. Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- g. A zoom scan volume of 32 mm x 32 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOPR5000	IC ID:	906B-PR5000	
Model(s):	PR5000, PR5020, PR5050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					7 of 43

7.0 SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluation a system check was performed using a Plexiglas planar phantom and 450MHz dipole (see Appendix E for system validation procedures). The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using an ALS-PR-DIEL Dielectric Probe Kit and HP 8753ET Network Analyzer (see Appendix C for measured fluid dielectric parameters). A forward power of 250 mW was applied to the dipole and the system was verified to a tolerance of $\pm 10\%$ (see Appendix B for system performance check test plot).

SYSTEM PERFORMANCE CHECK EVALUATION																
Test Date	450MHz Equiv. Tissue	SAR 1g (W/kg)			Dielectric Constant ϵ_r			Conductivity σ (mho/m)			ρ (Kg/m ³)	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		IEEE Target	Meas.	Dev.	IEEE Target	Meas.	Dev.	IEEE Target	Meas.	Dev.						
Sept 1	Brain	1.23 ($\pm 10\%$)	1.26	+2.4%	43.5 $\pm 5\%$	43.4	-0.2%	0.87 $\pm 5\%$	0.86	-1.1%	1000	23.7	23.0	≥ 15	35	101.8
Sept 6	Brain	1.23 ($\pm 10\%$)	1.31	+6.5%	43.5 $\pm 5\%$	44.4	+2.1%	0.87 $\pm 5\%$	0.90	+3.4%	1000	24.6	22.7	≥ 15	30	101.7

Note(s):
 1. The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the system performance check. The temperatures listed in the table above were consistent for all measurement periods.

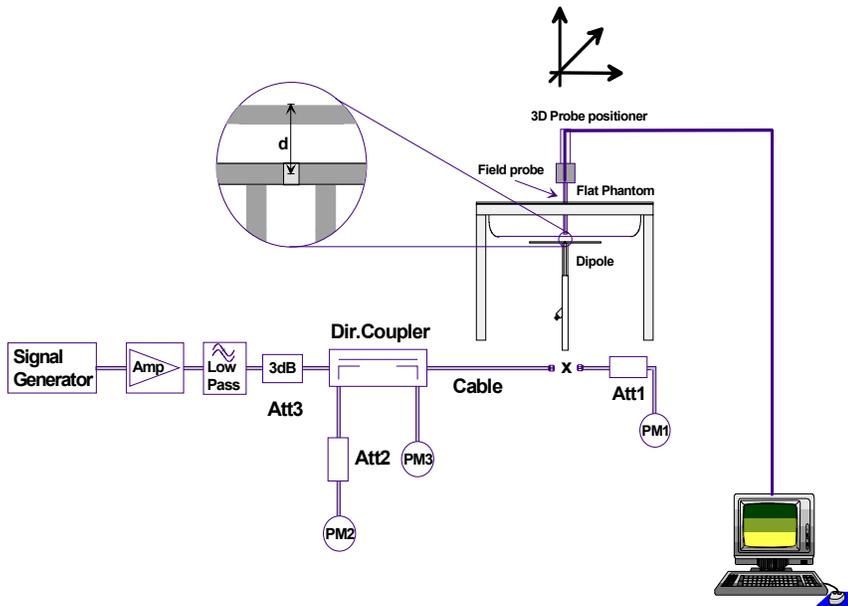


Figure 1. System Performance Check Setup Diagram



450 MHz Dipole Setup

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

8.0 SIMULATED EQUIVALENT TISSUES

The 450MHz brain and body simulated tissue mixtures consist of a viscous gel using hydroxethylcellulose (HEC) gelling agent and saline solution. Preservation with a bactericide is added and visual inspection is made to ensure air bubbles are not trapped during the mixing process. The fluid was prepared according to standardized procedures, and measured for dielectric parameters (permittivity and conductivity).

SIMULATED TISSUE MIXTURES		
INGREDIENT	450 MHz Brain	450 MHz Body
	System Check & DUT Evaluation	DUT Evaluation
Water	38.56 %	52.00 %
Sugar	56.32 %	45.65 %
Salt	3.95 %	1.75 %
HEC	0.98 %	0.50 %
Bactericide	0.19 %	0.10 %

9.0 SAR SAFETY LIMITS

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10g)	4.0	20.0

Notes:

1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

10.0 ROBOT SYSTEM SPECIFICATIONS

Specifications

POSITIONER: Stäubli Unimation Corp. Robot Model: RX60L
Repeatability: 0.02 mm
No. of axis: 6

Data Acquisition Electronic (DAE) System

Cell Controller

Processor: AMD Athlon XP 2400+
Clock Speed: 2.0 GHz
Operating System: Windows XP Professional

Data Converter

Features: Signal Amplifier, multiplexer, A/D converter, and control logic
Software: DASY4 software
Connecting Lines: Optical downlink for data and status info.
 Optical uplink for commands and clock

DASY4 Measurement Server

Function: Real-time data evaluation for field measurements and surface detection
Hardware: PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
Connections: COM1, COM2, DAE, Robot, Ethernet, Service Interface

E-Field Probe

Model: ET3DV6
Serial No.: 1387
Construction: Triangular core fiber optic detection system
Frequency: 10 MHz to 6 GHz
Linearity: ± 0.2 dB (30 MHz to 3 GHz)

Phantom(s)

Evaluation Phantom

Type: Planar Phantom
Shell Material: Plexiglas
Bottom Thickness: 2.0 mm \pm 0.1 mm
Outer Dimensions: 75.0 cm (L) x 22.5 cm (W) x 20.5 cm (H); Back Plane: 25.7 cm (H)

Validation Phantom (≤ 450 MHz)

Type: Planar Phantom
Shell Material: Plexiglas
Bottom Thickness: 6.2 mm \pm 0.1 mm
Outer Dimensions: 86.0 cm (L) x 39.5 cm (W) x 21.8 cm (H)

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

11.0 PROBE SPECIFICATION (ET3DV6)

Construction:	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g. glycol)
Calibration:	In air from 10 MHz to 2.5 GHz In brain simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy $\pm 8\%$)
Frequency:	10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)
Directivity:	± 0.2 dB in brain tissue (rotation around probe axis) ± 0.4 dB in brain tissue (rotation normal to probe axis)
Dynamic Range:	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Surface Detection:	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Dimensions:	Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm
Application:	General dosimetry up to 3 GHz Compliance tests of mobile phone



ET3DV6 E-Field Probe

12.0 PLANAR PHANTOM

The planar phantom is constructed of Plexiglas material with a 2.0 mm shell thickness for face-held and body-worn SAR evaluations of portable radio transceivers. The planar phantom is mounted on the side of the DASY4 compact system table.



Plexiglas Planar Phantom

13.0 VALIDATION PLANAR PHANTOM

The validation planar phantom is constructed of Plexiglas material with a 6.0 mm shell thickness for SAR validations at 450MHz and below. The validation planar phantom is mounted in the table of the DASY4 compact system.



Validation Planar Phantom

14.0 DEVICE HOLDER

The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.



Device Holder

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOPR5000	IC ID:	906B-PR5000	
Model(s):	PR5000, PR5020, PR5050	Portable FRS/GMRS PTT Radio Transceiver	462.5500 - 467.7125 MHz			
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					11 of 43

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

15.0 TEST EQUIPMENT LIST

USED	TEST EQUIPMENT	ASSET NO.	SERIAL NO.	DATE CALIBRATED		CALIBRATION DUE DATE
	DESCRIPTION					
x	Schmid & Partner DASY4 System	-	-	-	-	-
x	-DASY4 Measurement Server	00158	1078	N/A	N/A	N/A
x	-Robot	00046	599396-01	N/A	N/A	N/A
x	-DAE4	00019	353	15Jun05		15Jun06
x	-DAE3	00018	370	25Jan05		25Jan06
x	-ET3DV6 E-Field Probe	00016	1387	18Mar05		18Mar06
	-ET3DV6 E-Field Probe	00017	1590	20May05		20May06
	-EX3DV4 E-Field Probe	00125	3547	21Jan05		21Jan06
	-300MHz Validation Dipole	00023	135	26Oct04		26Oct05
x	-450MHz Validation Dipole	00024	136	04Nov04		04Nov05
	-835MHz Validation Dipole	00022	411	Brain	30Mar05	30Mar06
				Body	12Apr05	12Apr06
	-900MHz Validation Dipole	00020	054	Brain	10Jun05	10Jun06
				Body	10Jun05	10Jun06
	-1800MHz Validation Dipole	00021	247	Brain	14Jun05	14Jun06
				Body	14Jun05	14Jun06
	-1900MHz Validation Dipole	00032	151	Brain	17Jun05	17Jun06
				Body	22Apr05	22Apr06
	-2450MHz Validation Dipole	00025	150	Brain	30Sep04	30Sep05
				Body	22Apr05	22Apr06
	-5000MHz Validation Dipole	00126	1031	Brain	11Jan05	11Jan06
				Body	11Jan05	11Jan06
	-SAM Phantom V4.0C	00154	1033	N/A		N/A
	-Barski Planar Phantom	00155	03-01	N/A		N/A
x	-Plexiglas Planar Phantom	00156	161	N/A		N/A
x	-Validation Planar Phantom	00157	137	N/A		N/A
	HP 85070C Dielectric Probe Kit	00033	N/A	N/A		N/A
x	ALS-PR-DIEL Dielectric Probe Kit	00160	260-00953	N/A		N/A
	Gigatronics 8652A Power Meter	00110	1835801	16Apr05		16Apr06
x	Gigatronics 8652A Power Meter	00008	1835267	29Apr05		29Apr06
	Gigatronics 8652A Power Meter	00007	1835272	18Oct04		18Oct05
	Gigatronics 80701A Power Sensor	00013	1833713	11Oct04		11Oct05
x	Gigatronics 80701A Power Sensor	00011	1833542	08Oct04		08Oct05
x	Gigatronics 80701A Power Sensor	00109	1834366	16Apr05		16Apr06
x	HP 8753ET Network Analyzer	00134	US39170292	04May05		04May06
x	HP 8648D Signal Generator	00005	3847A00611	29Apr05		29Apr06
	Rohde & Schwarz SMR40 Signal Generator	00006	100104	12Apr05		12Apr06
x	Amplifier Research 5S1G4 Power Amplifier	00106	26235	N/A		N/A

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOPR5000	IC ID:	906B-PR5000	
Model(s):	PR5000, PR5020, PR5050	Portable FRS/GMRS PTT Radio Transceiver	462.5500 - 467.7125 MHz			
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				12 of 43

16.0 MEASUREMENT UNCERTAINTIES

UNCERTAINTY BUDGET FOR DEVICE EVALUATION						
Error Description	Uncertainty Value $\pm\%$	Probability Distribution	Divisor	ci 1g	Uncertainty Value $\pm\%$ (1g)	V_i or V_{off}
Measurement System						
Probe calibration	4.0	Normal	1	1	4.0	∞
Axial isotropy of the probe	4.7	Rectangular	1.732050808	0.7	1.9	∞
Spherical isotropy of the probe	9.6	Rectangular	1.732050808	0.7	3.9	∞
Spatial resolution	0	Rectangular	1.732050808	1	0.0	∞
Boundary effects	1	Rectangular	1.732050808	1	0.6	∞
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	∞
Detection limit	1	Rectangular	1.732050808	1	0.6	∞
Readout electronics	0.3	Normal	1	1	0.3	∞
Response time	0.8	Rectangular	1.732050808	1	0.5	∞
Integration time	2.6	Rectangular	1.732050808	1	1.5	∞
RF ambient conditions	3	Rectangular	1.732050808	1	1.7	∞
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	∞
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	∞
Extrapolation & integration	1	Rectangular	1.732050808	1	0.6	∞
Test Sample Related						
Device positioning	2.9	Normal	1	1	2.9	12
Device holder uncertainty	3.6	Normal	1	1	3.6	8
Power drift	5	Rectangular	1.732050808	1	2.9	∞
Phantom and Setup						
Phantom uncertainty	4	Rectangular	1.732050808	1	2.3	∞
Liquid conductivity (target)	5	Rectangular	1.732050808	0.64	1.8	∞
Liquid conductivity (measured)	2.5	Normal	1	0.64	1.6	∞
Liquid permittivity (target)	5	Rectangular	1.732050808	0.6	1.7	∞
Liquid permittivity (measured)	2.5	Normal	1	0.6	1.5	∞
Combined Standard Uncertainty					9.88	
Expanded Uncertainty (k=2)					19.77	

Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5])

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

MEASUREMENT UNCERTAINTIES (Cont.)

UNCERTAINTY BUDGET FOR SYSTEM VALIDATION						
Error Description	Uncertainty Value $\pm\%$	Probability Distribution	Divisor	ci 1g	Uncertainty Value $\pm\%$ (1g)	V_i or V_{eff}
Measurement System						
Probe calibration	4.0	Normal	1	1	4.0	∞
Axial isotropy of the probe	4.7	Rectangular	1.732050808	1	2.7	∞
Spherical isotropy of the probe	0	Rectangular	1.732050808	1	0.0	∞
Spatial resolution	0	Rectangular	1.732050808	1	0.0	∞
Boundary effects	1	Rectangular	1.732050808	1	0.6	∞
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	∞
Detection limit	1	Rectangular	1.732050808	1	0.6	∞
Readout electronics	0.3	Normal	1	1	0.3	∞
Response time	0	Rectangular	1.732050808	1	0.0	∞
Integration time	0	Rectangular	1.732050808	1	0.0	∞
RF ambient conditions	3	Rectangular	1.732050808	1	1.7	∞
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	∞
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	∞
Extrapolation & integration	1	Rectangular	1.732050808	1	0.6	∞
Test Sample Related						
Dipole Positioning	2	Normal	1.732050808	1	1.2	∞
Power & Power Drift	4.7	Normal	1.732050808	1	2.7	∞
Phantom and Setup						
Phantom uncertainty	4	Rectangular	1.732050808	1	2.3	∞
Liquid conductivity (target)	5	Rectangular	1.732050808	0.64	1.8	∞
Liquid conductivity (measured)	2.5	Normal	1	0.64	1.6	∞
Liquid permittivity (target)	5	Rectangular	1.732050808	0.6	1.7	∞
Liquid permittivity (measured)	2.5	Normal	1	0.6	1.5	∞
Combined Standard Uncertainty					7.93	
Expanded Uncertainty (k=2)					15.87	

Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5])

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

17.0 REFERENCES

- [1] Federal Communications Commission, "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093: 1999.
- [2] Health Canada, "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6: 1999.
- [3] Federal Communications Commission, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada, "Evaluation Procedure for Mobile and Portable Radio Transmitters with respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields", Radio Standards Specification RSS-102 Issue 1 (Provisional): September 1999.
- [5] IEEE Standard 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [6] ANSI/TIA-603-C, "Land Mobile FM or PM Communications Equipment - Measurement and Performance Standards": December 2004.

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOPR5000	IC ID:	906B-PR5000	
Model(s):	PR5000, PR5020, PR5050	Portable FRS/GMRS PTT Radio Transceiver	462.5500 - 467.7125 MHz			
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					15 of 43

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

APPENDIX A - SAR MEASUREMENT DATA

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOPR5000	IC ID:	906B-PR5000	
Model(s):	PR5000, PR5020, PR5050	Portable FRS/GMRS PTT Radio Transceiver	462.5500 - 467.7125 MHz			
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					16 of 43

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Date Tested: 09/06/05

Face-Held SAR - Alkaline (Duracell Procell) AA Batteries

DUT: Cobra Model: PR5050; Type: Portable UHF FRS/GMRS PTT Radio Transceiver; Serial: H507000001

Ambient Temp: 25.1°C; Fluid Temp: 22.7°C; Barometric Pressure: 101.7 kPa; Humidity: 30%

Communication System: FM UHF
 RF Output Power: 1.42 Watts (ERP)
 Frequency: 462.7250 MHz; Duty Cycle: 1:1
 1.5V 1250mAh Alkaline (Duracell Procell) AA Batteries (x4)
 Medium: HSL450 ($\sigma = 0.90$ mho/m; $\epsilon_r = 44.4$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(7.5, 7.5, 7.5); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance/Area Scan (8x15x1):

Measurement grid: dx=15mm, dy=15mm

Face-Held - 2.5 cm Separation Distance/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 43.5 V/m; Power Drift = -0.937 dB
 Peak SAR (extrapolated) = 2.62 W/kg
SAR(1 g) = 1.67 mW/g; SAR(10 g) = 1.18 mW/g

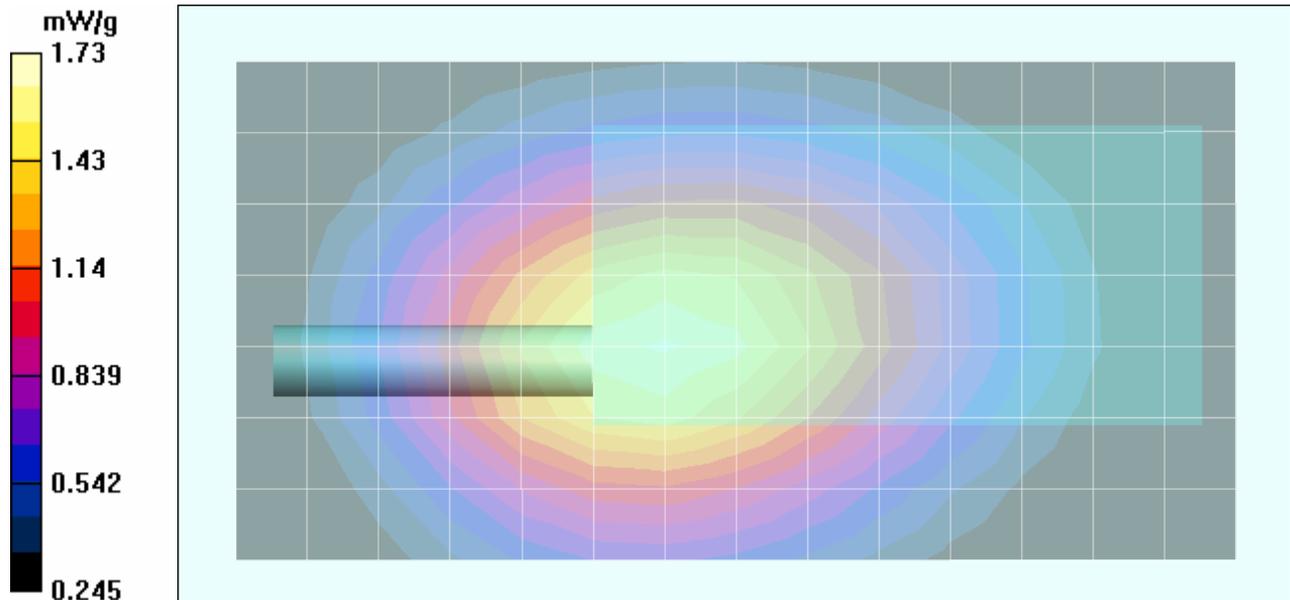

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOPR5000	IC ID:	906B-PR5000	
Model(s):	PR5000, PR5020, PR5050	Portable FRS/GMRS PTT Radio Transceiver	462.5500 - 467.7125 MHz			
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				17 of 43

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

Z-Axis Scan

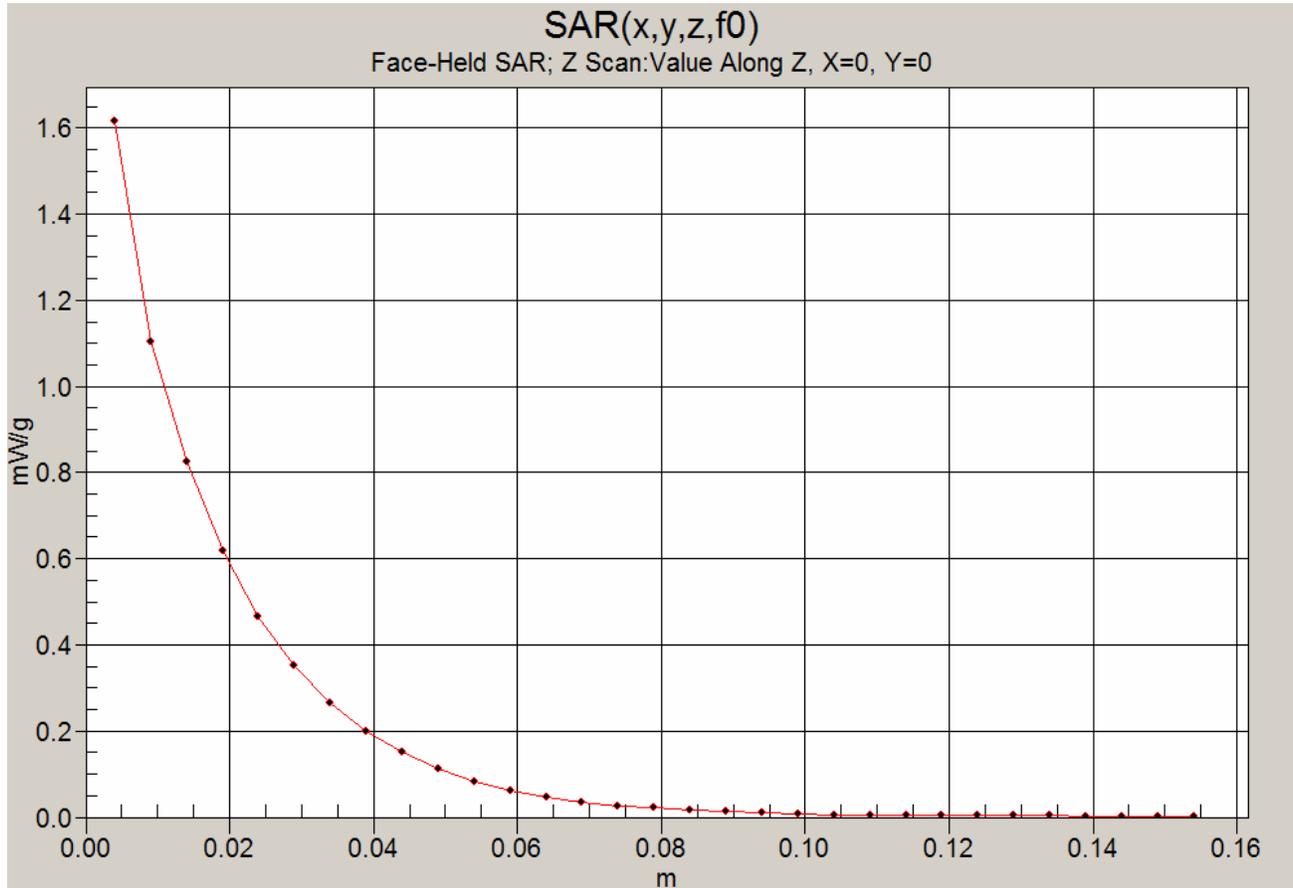

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Date Tested: 09/06/05

Face-Held SAR - NiMH AA Batteries

DUT: Cobra Model: PR5050; Type: Portable UHF FRS/GMRS PTT Radio Transceiver; Serial: H507000001

Ambient Temp: 25.1°C; Fluid Temp: 22.7°C; Barometric Pressure: 101.7 kPa; Humidity: 30%

Communication System: FM UHF
 RF Output Power: 1.42 Watts (ERP)
 Frequency: 462.7250 MHz; Duty Cycle: 1:1
 1.2V 1200mAh NiMH AA Batteries (x4)
 Medium: HSL450 ($\sigma = 0.90$ mho/m; $\epsilon_r = 44.4$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(7.5, 7.5, 7.5); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance/Area Scan (8x15x1):

Measurement grid: dx=15mm, dy=15mm

Face-Held - 2.5 cm Separation Distance/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 40.2 V/m; Power Drift = -0.818 dB
 Peak SAR (extrapolated) = 2.31 W/kg
SAR(1 g) = 1.47 mW/g; SAR(10 g) = 1.04 mW/g

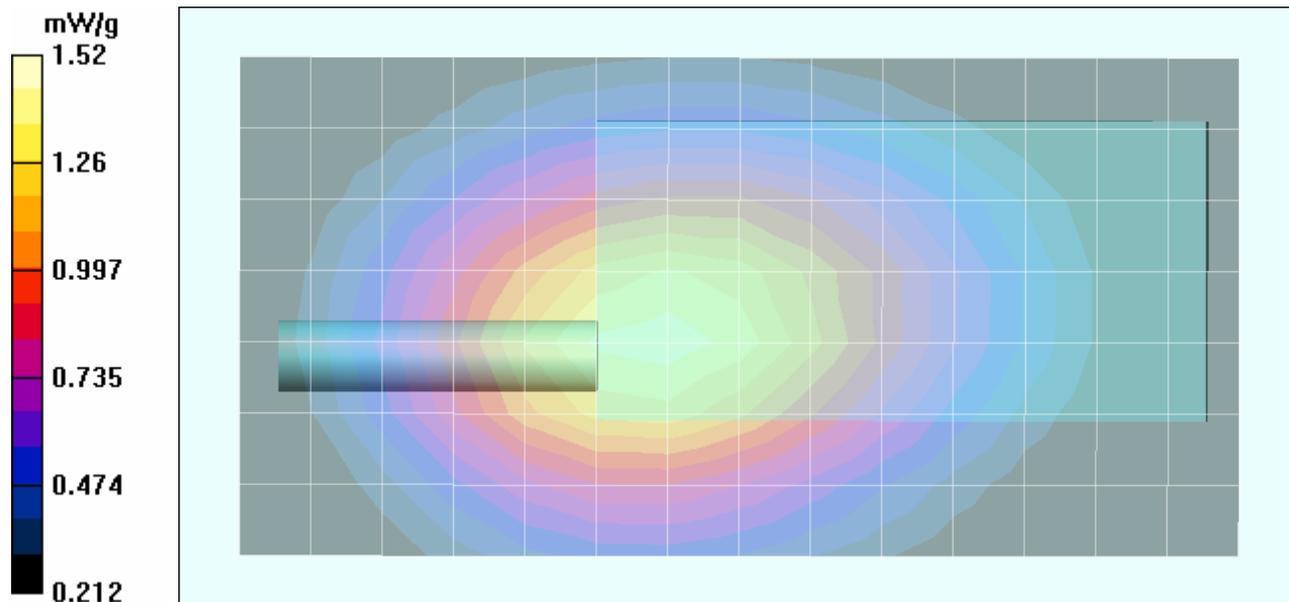

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOPR5000	IC ID:	906B-PR5000	
Model(s):	PR5000, PR5020, PR5050	Portable FRS/GMRS PTT Radio Transceiver	462.5500 - 467.7125 MHz			
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					19 of 43

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Date Tested: 09/06/05

Face-Held SAR - NiCd AA Batteries

DUT: Cobra Model: PR5050; Type: Portable UHF FRS/GMRS PTT Radio Transceiver; Serial: H507000001

Ambient Temp: 25.1°C; Fluid Temp: 22.7°C; Barometric Pressure: 101.7 kPa; Humidity: 30%

Communication System: FM UHF
 RF Output Power: 1.42 Watts (ERP)
 Frequency: 462.7250 MHz; Duty Cycle: 1:1
 1.2V 600mAh NiCd AA Batteries (x4)
 Medium: HSL450 ($\sigma = 0.90$ mho/m; $\epsilon_r = 44.4$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(7.5, 7.5, 7.5); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance/Area Scan (8x15x1):

Maximum value of SAR (measured) = 1.50 mW/g

Face-Held - 2.5 cm Separation Distance/Zoom Scan (5x5x7)/Cube 0:

Reference Value = 38.3 V/m; Power Drift = -0.690 dB
 Peak SAR (extrapolated) = 2.07 W/kg
SAR(1 g) = 1.33 mW/g; SAR(10 g) = 0.939 mW/g

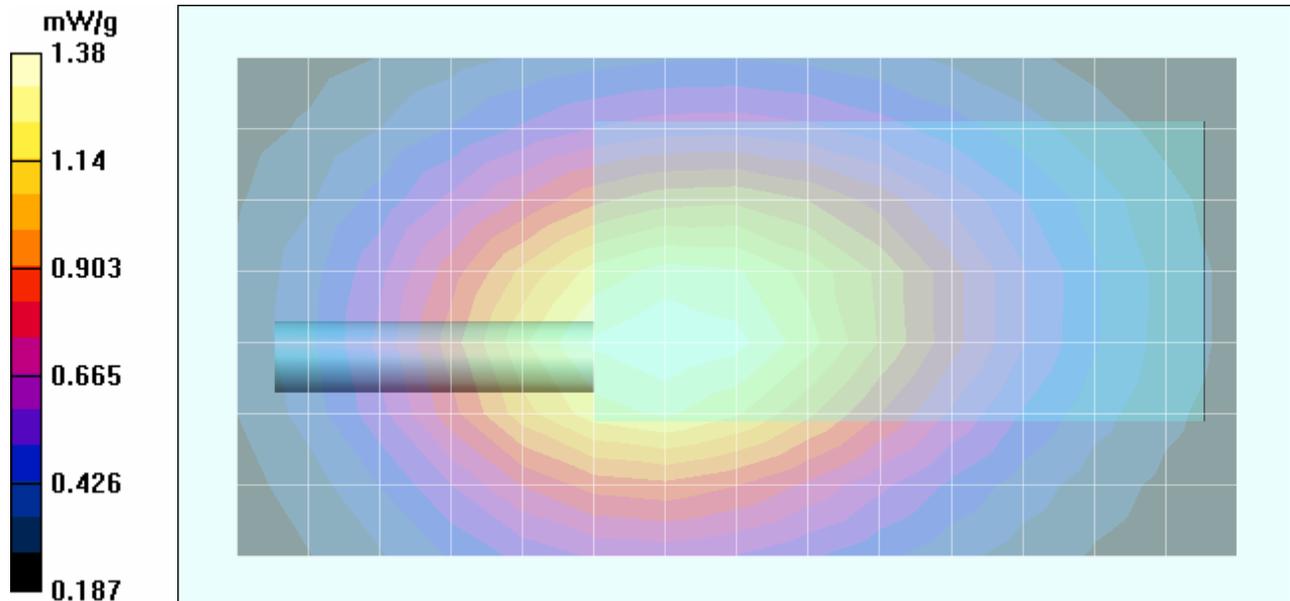

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Date Tested: 09/02/05

Body-Worn SAR - Alkaline (Duracell Procell) AA Batteries

DUT: Cobra Model: PR5050; Type: Portable UHF FRS/GMRS PTT Radio Transceiver; Serial: H507000001

Body-Worn Accessories: Plastic Belt-Clip, Generic Earbud with Lapel-Microphone

Ambient Temp: 24.2°C; Fluid Temp: 22.6°C; Barometric Pressure: 101.5 kPa; Humidity: 42%

Communication System: FM UHF
 RF Output Power: 1.42 Watts (ERP)
 Frequency: 462.7250 MHz; Duty Cycle: 1:1
 1.5V 1250mAh Alkaline (Duracell Procell) AA Batteries (x4)
 Medium: M450 ($\sigma = 0.96$ mho/m; $\epsilon_r = 56.8$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(7.5, 7.5, 7.5); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 0.7 cm Belt-Clip Separation Distance/Area Scan (8x15x1):

Measurement grid: dx=15mm, dy=15mm


Body-Worn - 0.7 cm Belt-Clip Separation Distance/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 48.6 V/m; Power Drift = -0.751 dB
 Peak SAR (extrapolated) = 3.95 W/kg
SAR(1 g) = 2.44 mW/g; SAR(10 g) = 1.66 mW/g

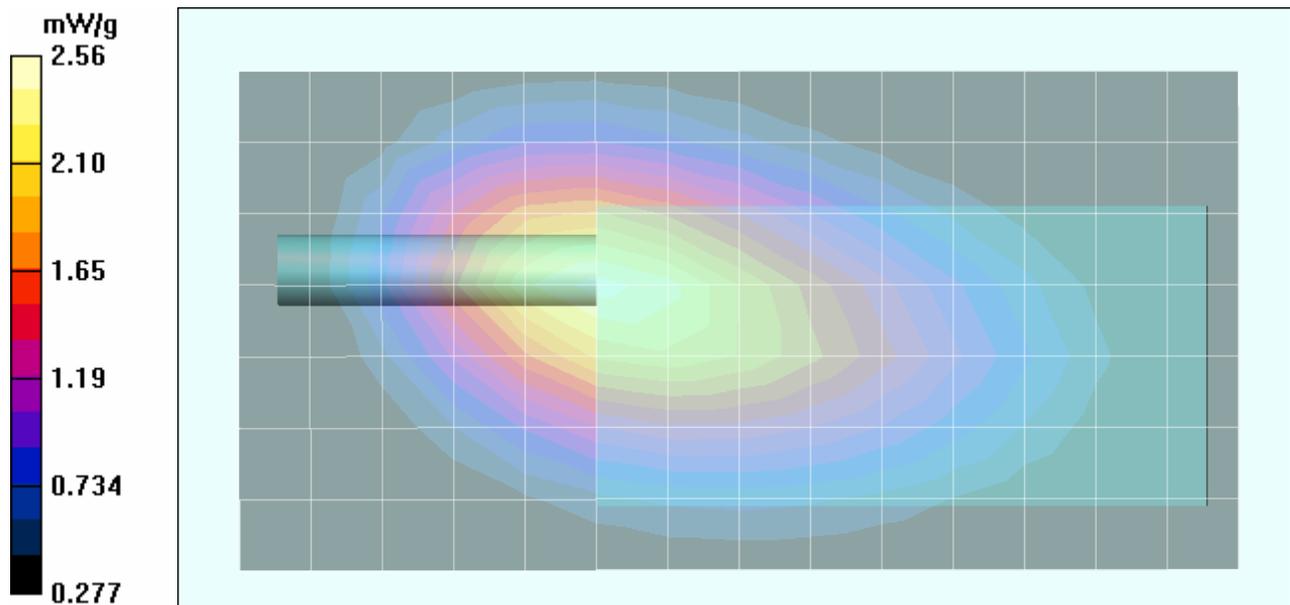

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102


Z-Axis Scan

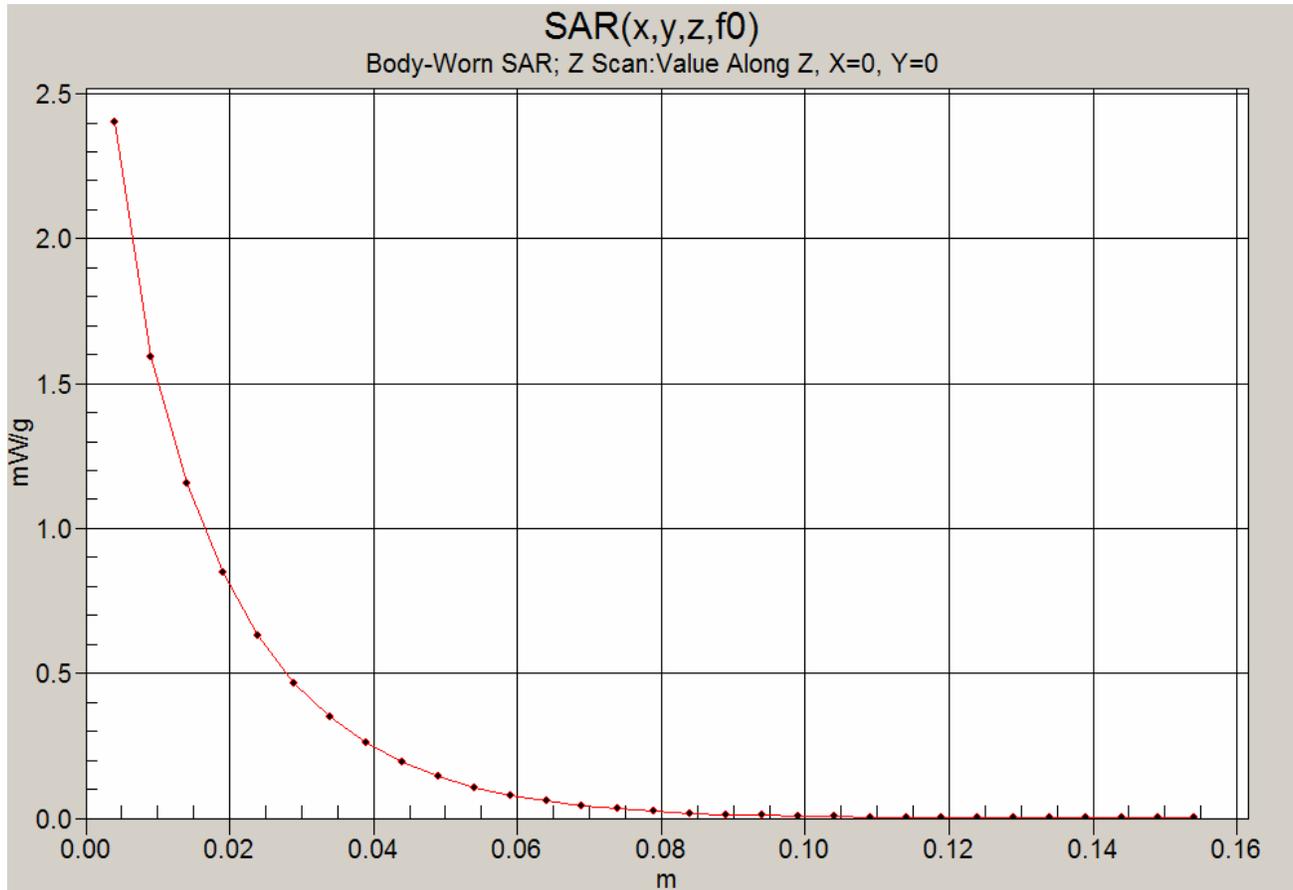

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

SAR-versus-Time Power Drift Evaluation

Body-Worn Configuration
 DUT with Alkaline AA Batteries (Duracell Procell)
 Channel 22 (462.7250 MHz)

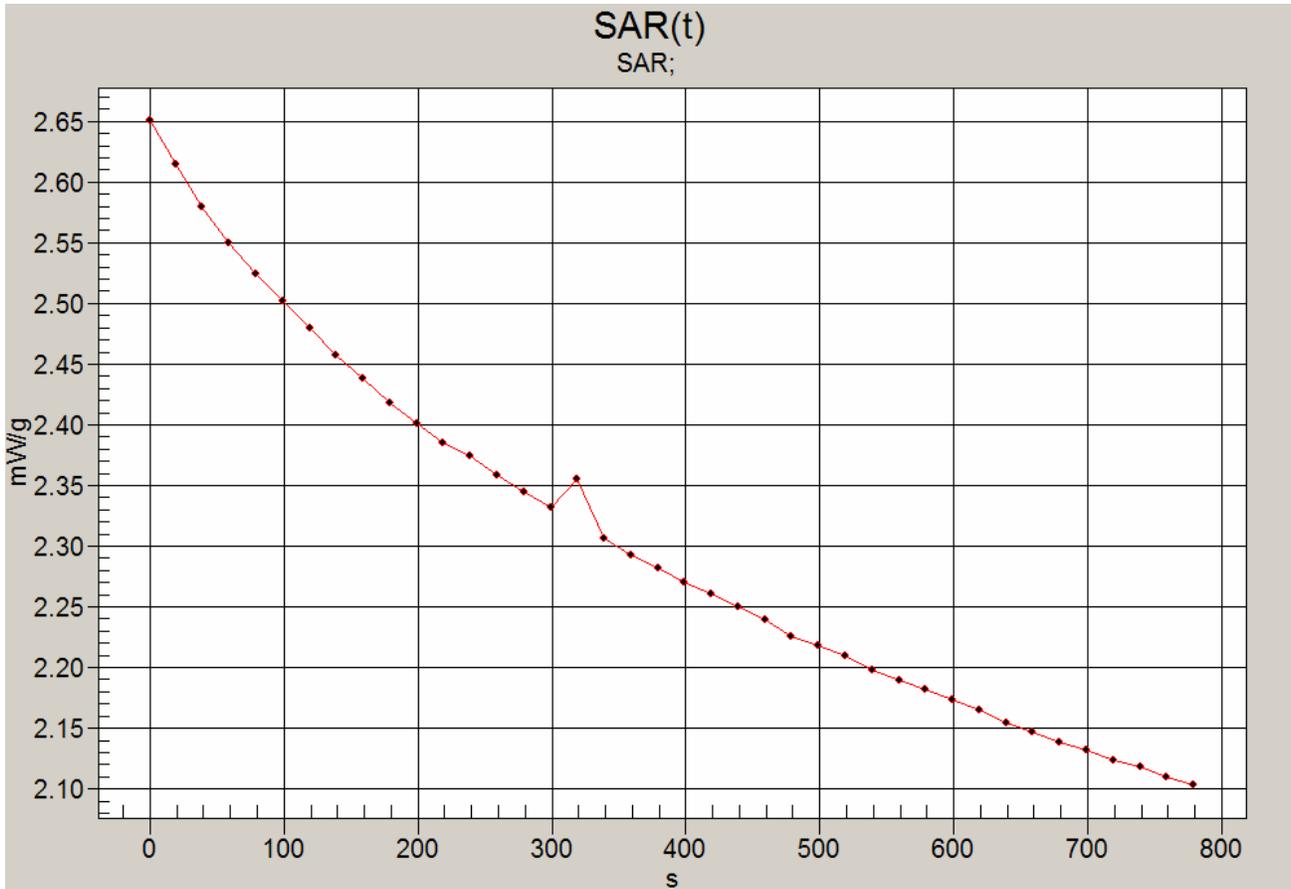

Start SAR: 2.65061 mW/g
 End SAR: 2.10358 mW/g (-1.0039 dB)
 SAR after 340s: 2.3064 mW/g (-0.60411 dB)
 (340s = Zoom Scan Duration)
 (780s = Area Scan Duration)

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Date Tested: 09/02/05

Body-Worn SAR - NiMH AA Batteries

DUT: Cobra Model: PR5050; Type: Portable UHF FRS/GMRS PTT Radio Transceiver; Serial: H507000001

Body-Worn Accessories: Plastic Belt-Clip, Generic Earbud with Lapel-Microphone

Ambient Temp: 24.2°C; Fluid Temp: 22.6°C; Barometric Pressure: 101.5 kPa; Humidity: 42%

Communication System: FM UHF
 RF Output Power: 1.42 Watts (ERP)
 Frequency: 462.7250 MHz; Duty Cycle: 1:1
 1.2V 1200mAh NiMH AA Batteries (x4)
 Medium: M450 ($\sigma = 0.96$ mho/m; $\epsilon_r = 56.8$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(7.5, 7.5, 7.5); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 0.7 cm Belt-Clip Separation Distance/Area Scan (8x15x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 0.7 cm Belt-Clip Separation Distance/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 43.7 V/m; Power Drift = -0.657 dB
 Peak SAR (extrapolated) = 3.36 W/kg
SAR(1 g) = 2.10 mW/g; SAR(10 g) = 1.43 mW/g

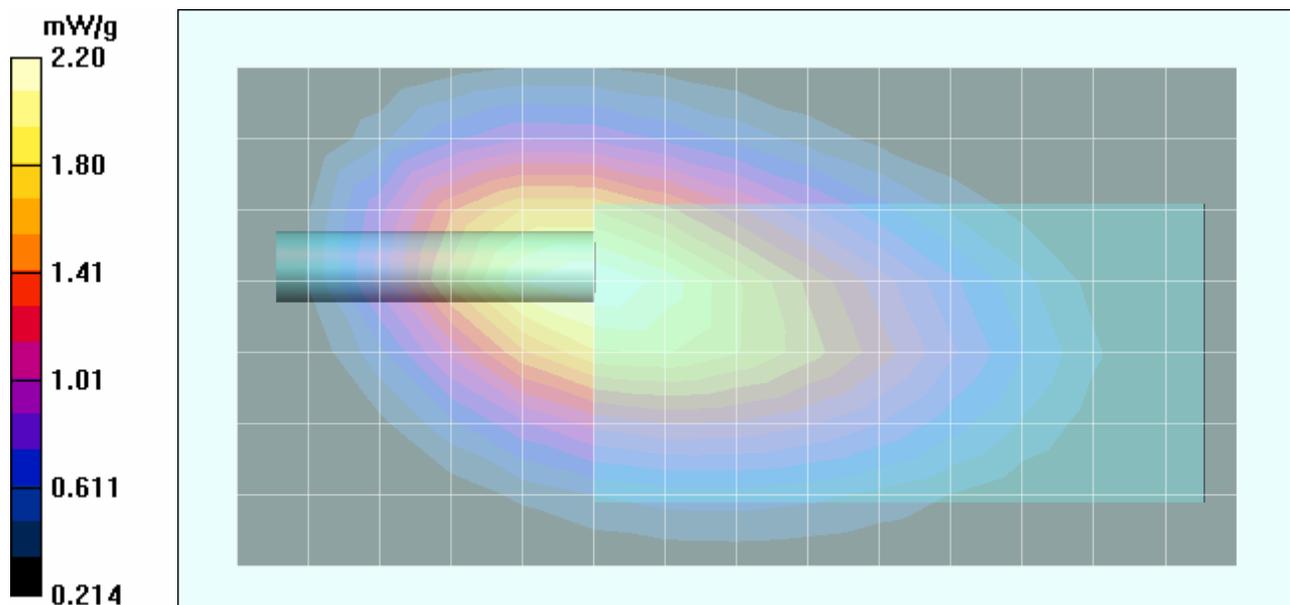

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

Date Tested: 09/02/05

Body-Worn SAR - NiCd AA Batteries

DUT: Cobra Model: PR5050; Type: Portable UHF FRS/GMRS PTT Radio Transceiver; Serial: H507000001

Body-Worn Accessories: Plastic Belt-Clip, Generic Earbud with Lapel-Microphone

Ambient Temp: 24.2°C; Fluid Temp: 22.6°C; Barometric Pressure: 101.5 kPa; Humidity: 42%

Communication System: FM UHF
 RF Output Power: 1.42 Watts (ERP)
 Frequency: 462.7250 MHz; Duty Cycle: 1:1
 1.2V 600mAh NiCd AA Batteries (x4)
 Medium: M450 ($\sigma = 0.96$ mho/m; $\epsilon_r = 56.8$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(7.5, 7.5, 7.5); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 0.7 cm Belt-Clip Separation Distance/Area Scan (8x15x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 0.7 cm Belt-Clip Separation Distance/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 43.0 V/m; Power Drift = -0.467 dB
 Peak SAR (extrapolated) = 3.06 W/kg
SAR(1 g) = 1.90 mW/g; SAR(10 g) = 1.31 mW/g

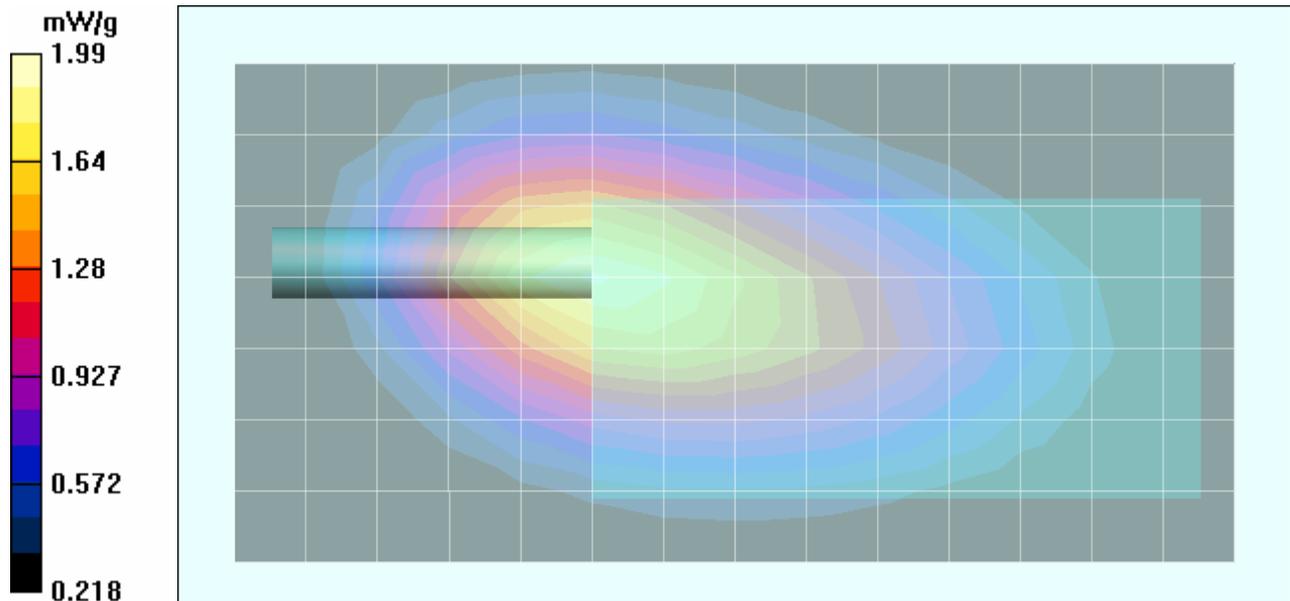

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

APPENDIX B - SYSTEM PERFORMANCE CHECK DATA

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOPR5000	IC ID:	906B-PR5000	
Model(s):	PR5000, PR5020, PR5050	Portable FRS/GMRS PTT Radio Transceiver	462.5500 - 467.7125 MHz			
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					26 of 43

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Date Tested: 09/01/05

System Performance Check - 450 MHz Dipole

DUT: Dipole 450 MHz; Type: D450V2; Serial: 136; Calibrated: 11/04/2004

Ambient Temp: 23.7°C; Fluid Temp: 23.0°C; Barometric Pressure: 101.8 kPa; Humidity: 35%


Communication System: CW
 Forward Conducted Power: 250 mW
 Frequency: 450 MHz; Duty Cycle: 1:1
 Medium: HSL450 ($\sigma = 0.86$ mho/m; $\epsilon_r = 43.4$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(7.5, 7.5, 7.5); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: Validation Planar; Type: Plexiglas; Serial: TE#137
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

450 MHz Dipole - System Performance Check/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

450 MHz Dipole - System Performance Check /Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 39.6 V/m; Power Drift = -0.086 dB
 Peak SAR (extrapolated) = 2.23 W/kg
SAR(1 g) = 1.26 mW/g; SAR(10 g) = 0.811 mW/g

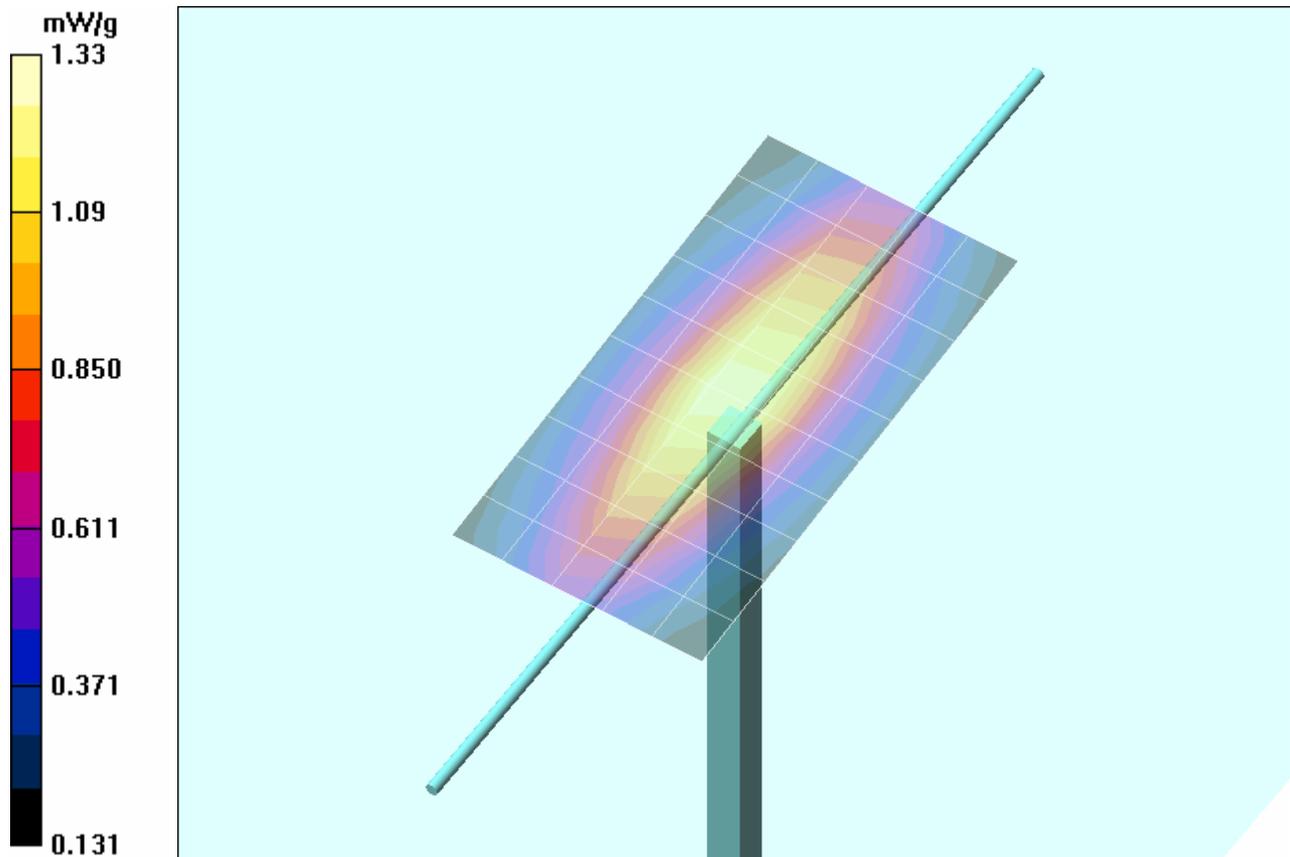

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOPR5000	IC ID:	906B-PR5000	
Model(s):	PR5000, PR5020, PR5050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				27 of 43

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Z-Axis Scan

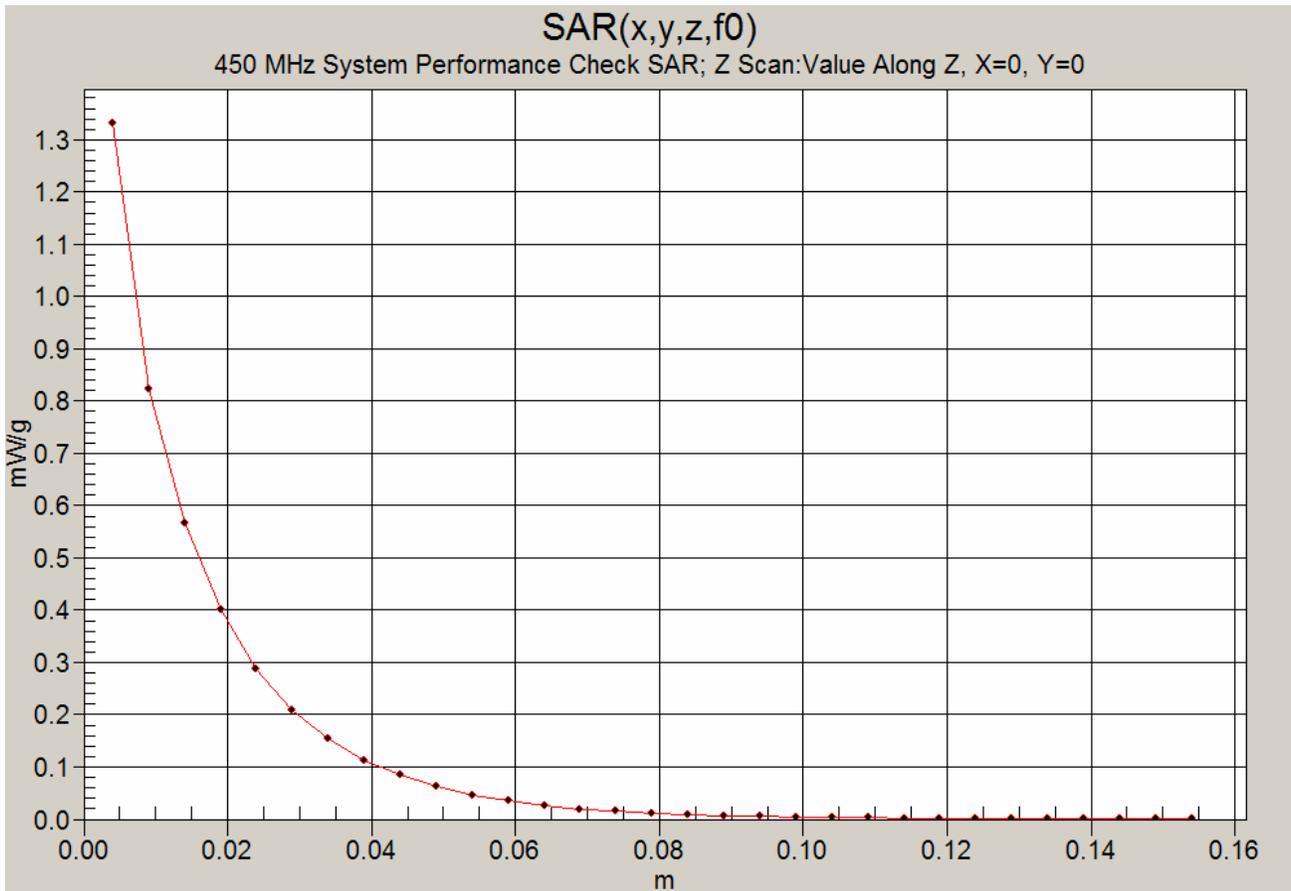

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Date Tested: 09/06/05

System Performance Check - 450 MHz Dipole

DUT: Dipole 450 MHz; Type: D450V2; Serial: 136; Calibrated: 11/04/2004

Ambient Temp: 24.6°C; Fluid Temp: 22.7°C; Barometric Pressure: 101.7 kPa; Humidity: 30%


Communication System: CW
 Forward Conducted Power: 250 mW
 Frequency: 450 MHz; Duty Cycle: 1:1
 Medium: HSL450 ($\sigma = 0.90$ mho/m; $\epsilon_r = 44.4$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(7.5, 7.5, 7.5); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Validation Planar; Type: Plexiglas; Serial: TE#137
- Measurement SW: DAS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

450 MHz Dipole - System Performance Check/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

450 MHz Dipole - System Performance Check /Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 39.3 V/m; Power Drift = -0.031 dB
 Peak SAR (extrapolated) = 2.28 W/kg
SAR(1 g) = 1.31 mW/g; SAR(10 g) = 0.842 mW/g

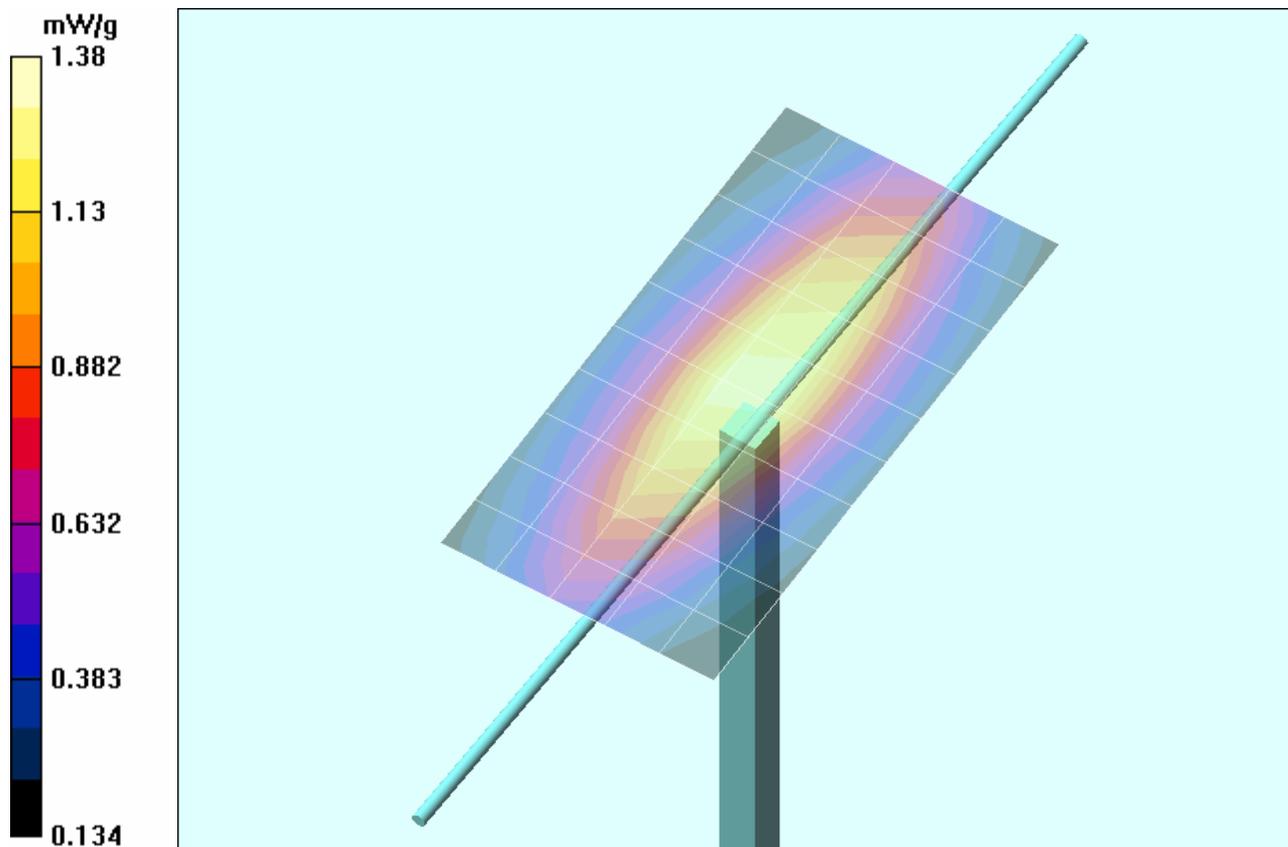

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOPR5000	IC ID:	906B-PR5000	
Model(s):	PR5000, PR5020, PR5050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				29 of 43

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Z-Axis Scan

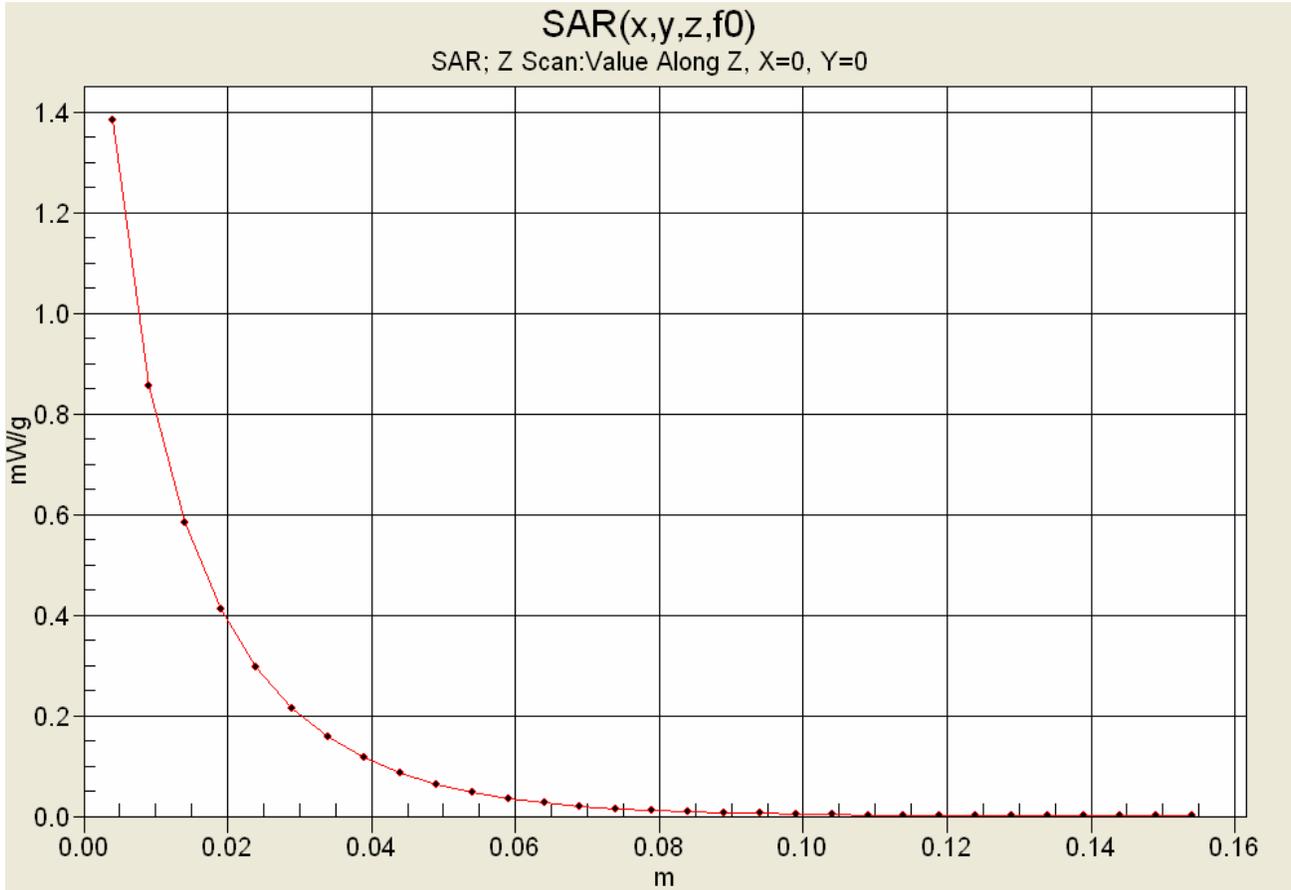

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOPR5000	IC ID:	906B-PR5000	
Model(s):	PR5000, PR5020, PR5050	Portable FRS/GMRS PTT Radio Transceiver	462.5500 - 467.7125 MHz			
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					31 of 43



Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

450 MHz System Performance Check & DUT Evaluation (Brain)

Celltech Labs Inc.
 Test Result for UIM Dielectric Parameter
 Tue 06/Sep/2005
 Frequency(GHz)
 FCC_eH FCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
 FCC_sH FCC OET 65 Supplement C (June 2001) Limits for Head Sigma
 Test_e Epsilon of UIM
 Test_s Sigma of UIM

Freq	FCC_eH	FCC_sH	Test_e	Test_s
0.3500	44.70	0.87	46.55	0.80
0.3600	44.58	0.87	46.16	0.79
0.3700	44.46	0.87	46.05	0.82
0.3800	44.34	0.87	45.63	0.81
0.3900	44.22	0.87	44.99	0.84
0.4000	44.10	0.87	45.23	0.86
0.4100	43.98	0.87	45.15	0.85
0.4200	43.86	0.87	44.70	0.86
0.4300	43.74	0.87	44.53	0.89
0.4400	43.62	0.87	44.39	0.88
0.4500	43.50	0.87	44.44	0.90
0.4600	43.45	0.87	43.99	0.90
0.4700	43.40	0.87	43.42	0.91
0.4800	43.34	0.87	42.94	0.92
0.4900	43.29	0.87	43.38	0.91
0.5000	43.24	0.87	43.03	0.93
0.5100	43.19	0.87	42.71	0.95
0.5200	43.14	0.88	42.27	0.96
0.5300	43.08	0.88	42.31	0.96
0.5400	43.03	0.88	42.11	0.96
0.5500	42.98	0.88	42.02	0.98

450 MHz System Performance Check (Brain)

Celltech Labs Inc.
 Test Result for UIM Dielectric Parameter
 Thu 01/Sep/2005
 Frequency(GHz)
 FCC_eH FCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
 FCC_sH FCC OET 65 Supplement C (June 2001) Limits for Head Sigma
 Test_e Epsilon of UIM
 Test_s Sigma of UIM

Freq	FCC_eH	FCC_sH	Test_e	Test_s
0.3500	44.70	0.87	46.08	0.76
0.3600	44.58	0.87	46.01	0.79
0.3700	44.46	0.87	45.70	0.78
0.3800	44.34	0.87	44.41	0.80
0.3900	44.22	0.87	44.31	0.82
0.4000	44.10	0.87	44.87	0.82
0.4100	43.98	0.87	43.74	0.82
0.4200	43.86	0.87	43.77	0.83
0.4300	43.74	0.87	44.28	0.83
0.4400	43.62	0.87	43.53	0.85
0.4500	43.50	0.87	43.43	0.86
0.4600	43.45	0.87	42.80	0.87
0.4700	43.40	0.87	42.86	0.87
0.4800	43.34	0.87	42.85	0.89
0.4900	43.29	0.87	42.15	0.90
0.5000	43.24	0.87	42.86	0.91
0.5100	43.19	0.87	42.12	0.91
0.5200	43.14	0.88	41.80	0.91
0.5300	43.08	0.88	42.36	0.93
0.5400	43.03	0.88	41.69	0.93
0.5500	42.98	0.88	41.19	0.93

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOPR5000	IC ID:	906B-PR5000	
Model(s):	PR5000, PR5020, PR5050	Portable FRS/GMRS PTT Radio Transceiver	462.5500 - 467.7125 MHz			
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				32 of 43

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

450 MHz DUT Evaluation (Body)

Celltech Labs Inc.
 Test Result for UIM Dielectric Parameter
 Fri 02/Sep/2005
 Frequency(GHz)
 FCC_eH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon
 FCC_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma
 FCC_eB FCC Limits for Body Epsilon
 FCC_sB FCC Limits for Body Sigma
 Test_e Epsilon of UIM
 Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.3500	57.70	0.93	59.17	0.90
0.3600	57.60	0.93	59.13	0.91
0.3700	57.50	0.93	58.32	0.91
0.3800	57.40	0.93	57.88	0.92
0.3900	57.30	0.93	57.95	0.93
0.4000	57.20	0.93	57.89	0.94
0.4100	57.10	0.93	57.45	0.95
0.4200	57.00	0.94	56.84	0.96
0.4300	56.90	0.94	57.54	0.94
0.4400	56.80	0.94	57.00	0.96
0.4500	56.70	0.94	56.79	0.96
0.4600	56.66	0.94	56.35	0.99
0.4700	56.62	0.94	56.88	0.99
0.4800	56.58	0.94	56.07	1.00
0.4900	56.54	0.94	55.95	1.01
0.5000	56.51	0.94	56.57	1.02
0.5100	56.47	0.94	55.93	1.04
0.5200	56.43	0.95	55.99	1.03
0.5300	56.39	0.95	56.41	1.05
0.5400	56.35	0.95	55.79	1.05
0.5500	56.31	0.95	55.38	1.04


Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOPR5000	IC ID:	906B-PR5000	
Model(s):	PR5000, PR5020, PR5050	Portable FRS/GMRS PTT Radio Transceiver	462.5500 - 467.7125 MHz			
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					34 of 43

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102



FACE-HELD SAR TEST SETUP PHOTOGRAPHS
2.5 cm Separation Distance from Front of DUT to Planar Phantom

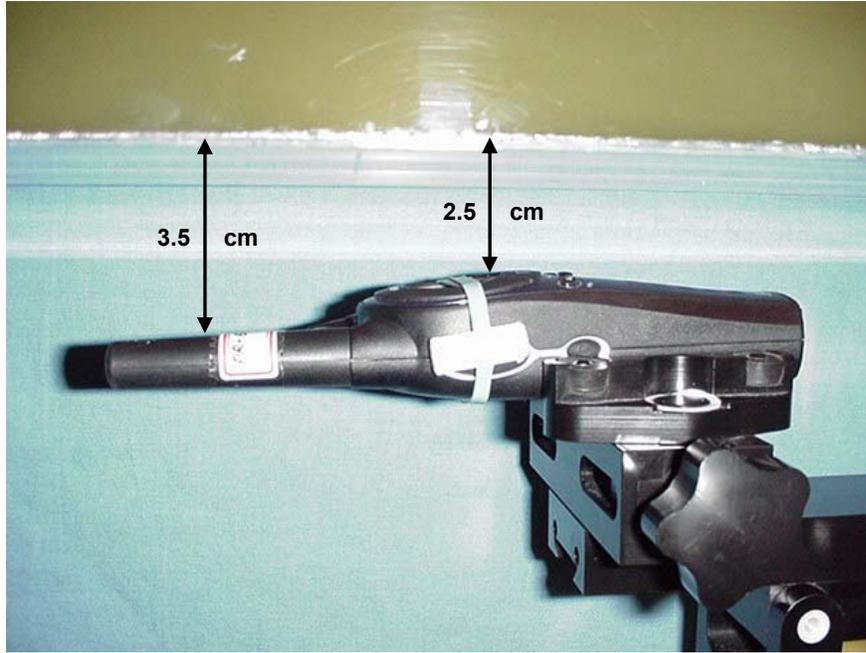

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOPR5000	IC ID:	906B-PR5000	
Model(s):	PR5000, PR5020, PR5050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				35 of 43

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

BODY-WORN SAR TEST SETUP PHOTOGRAPHS
0.7 cm Belt-Clip Separation Distance from Back of DUT to Planar Phantom
Generic Earbud with Lapel-Microphone Audio Accessory

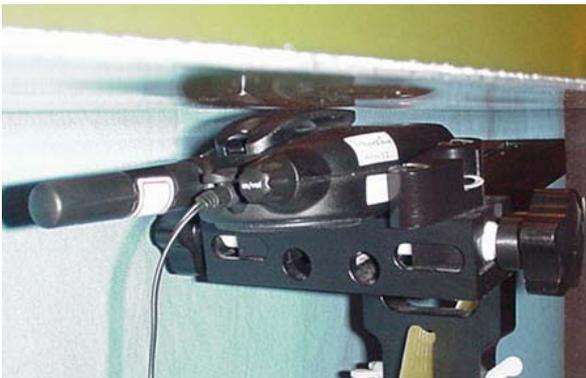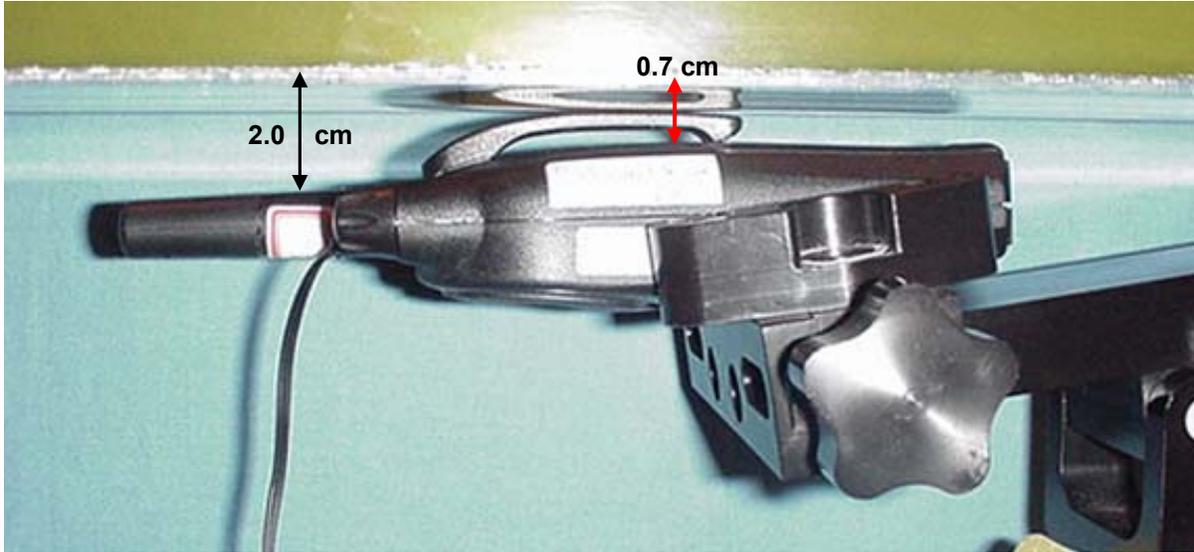

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOPR5000	IC ID:	906B-PR5000	
Model(s):	PR5000, PR5020, PR5050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				36 of 43

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

SAR TEST SETUP PHOTOGRAPHS



Face-Held Test Setup Configuration



Body-Worn Test Setup Configuration

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOPR5000	IC ID:	906B-PR5000	
Model(s):	PR5000, PR5020, PR5050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				37 of 43

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

DUT PHOTOGRAPHS



Front of DUT



Back of DUT



Back of DUT with Belt-Clip



Top end of DUT



Bottom end of DUT

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOPR5000	IC ID:	906B-PR5000	
Model(s):	PR5000, PR5020, PR5050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				38 of 43

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

DUT PHOTOGRAPHS



Left Side of DUT with Plastic Belt-Clip



Right Side of DUT with Plastic Belt-Clip



Plastic Belt-Clip Accessory

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOPR5000	IC ID:	906B-PR5000	
Model(s):	PR5000, PR5020, PR5050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				39 of 43

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

DUT PHOTOGRAPHS



DUT with Generic Earbud/Lapel-Microphone Audio Accessory

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOPR5000	IC ID:	906B-PR5000	
Model(s):	PR5000, PR5020, PR5050	Portable FRS/GMRS PTT Radio Transceiver	462.5500 - 467.7125 MHz			
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				40 of 43

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

DUT PHOTOGRAPHS



DUT Battery Compartment



Alkaline (Duracell Procell) AA Batteries



NiMH AA Batteries



NiCd AA Batteries

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOPR5000	IC ID:	906B-PR5000	
Model(s):	PR5000, PR5020, PR5050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				41 of 43

Test Report Serial No.:	081905BBO-T663-S95F	Test Dates:	Sept. 01, 06, 2005
Date of Report Issue:	September 13, 2005	Rev. No.:	Revision 1
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

APPENDIX E - SYSTEM VALIDATION

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOPR5000	IC ID:	906B-PR5000	
Model(s):	PR5000, PR5020, PR5050	Portable FRS/GMRS PTT Radio Transceiver	462.5500 - 467.7125 MHz			
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					42 of 43

450 MHz SYSTEM VALIDATION DIPOLE

Type:

450 MHz Validation Dipole

Serial Number:

136

Place of Calibration:

Celltech Labs Inc.

Date of Calibration:

November 4, 2004

Celltech Labs Inc. hereby certifies that this device has been calibrated on the date indicated above.

Calibrated by:

Spencer Watson


Approved by:

Russell W. Pope


1. Dipole Construction & Electrical Characteristics

The validation dipole was constructed in accordance with the IEEE Std “Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques”. The electrical properties were measured using an HP 8753E Network Analyzer. The network analyzer was calibrated to the validation dipole N-type connector feed point using an HP85032E Type N calibration kit. The dipole was placed parallel to a planar phantom at a separation distance of 15.0mm from the simulating fluid using a loss-less dielectric spacer. The measured input impedance is:

Feed point impedance at 450MHz	$\text{Re}\{Z\} = 54.041\Omega$
	$\text{Im}\{Z\} = 5.5258\Omega$
Return Loss at 450MHz	-23.744dB

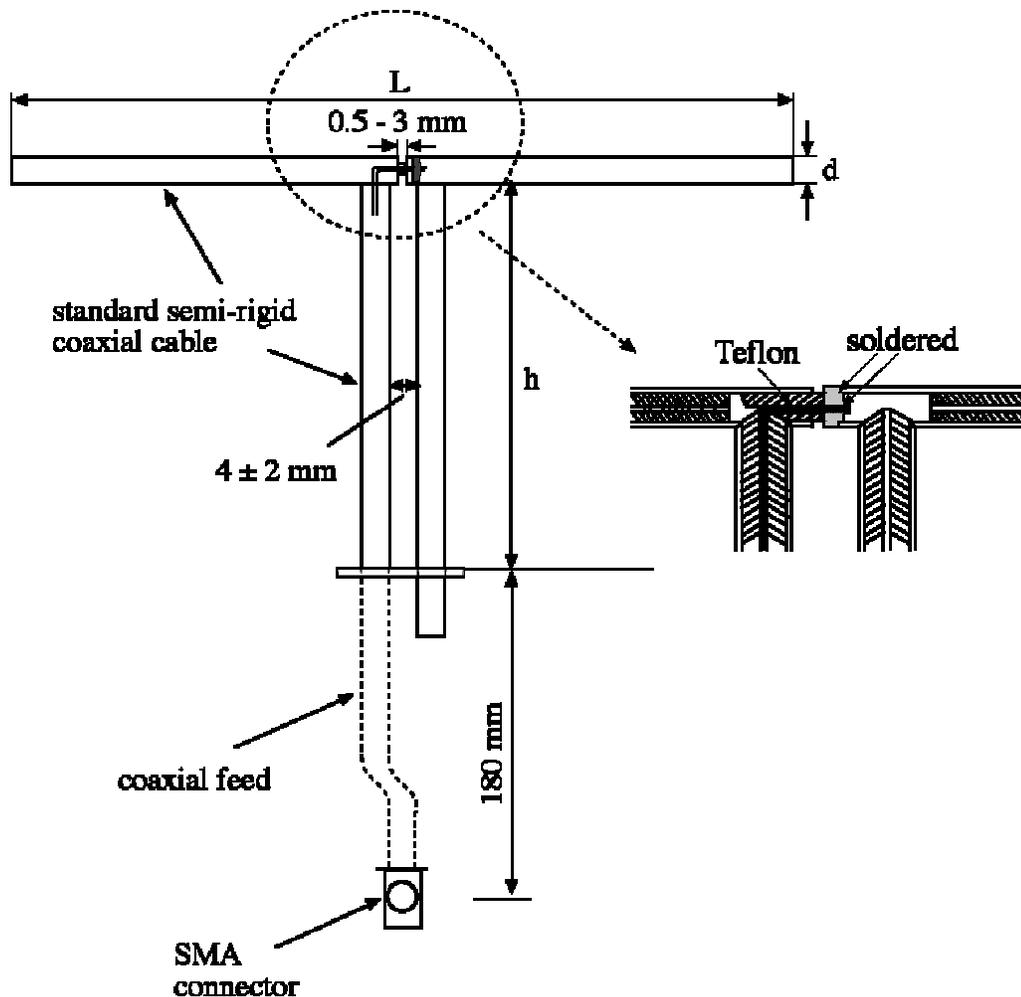

4 Nov 2004 09:03:54

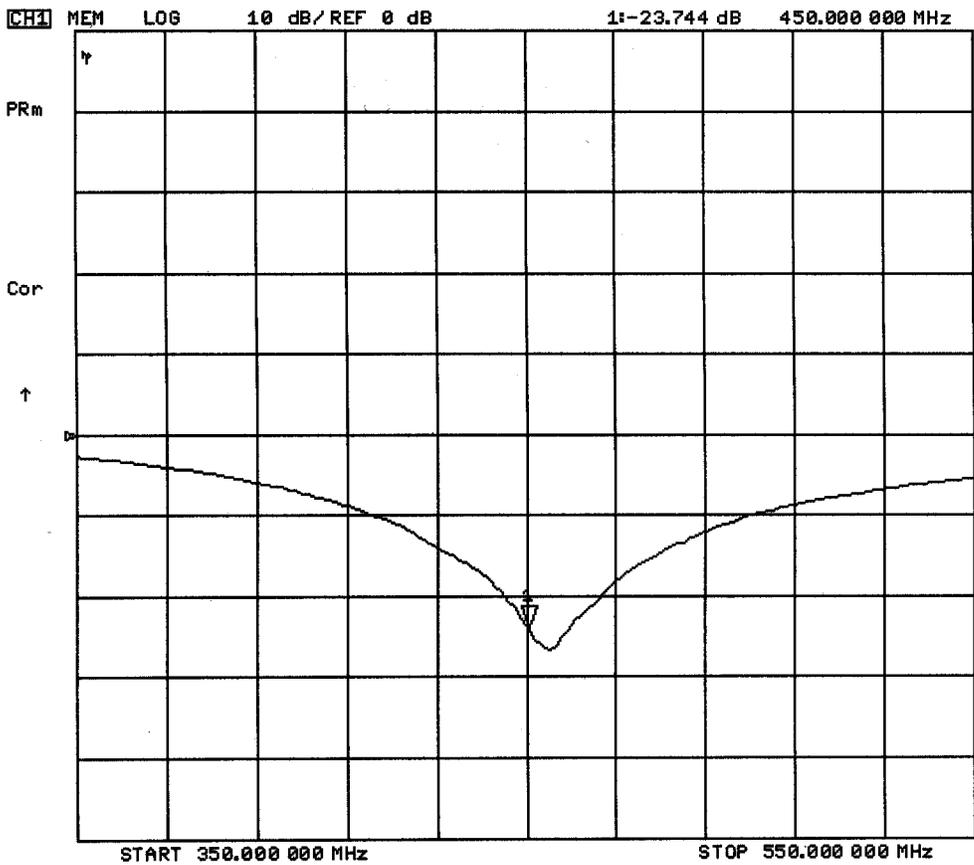

MEM 1 U FS

1: 54.041 Ω 5.4258 Ω 1.9190 nH


4 Nov 2004 09:05:08

450.000 000 MHz

PRn

Cor

↑

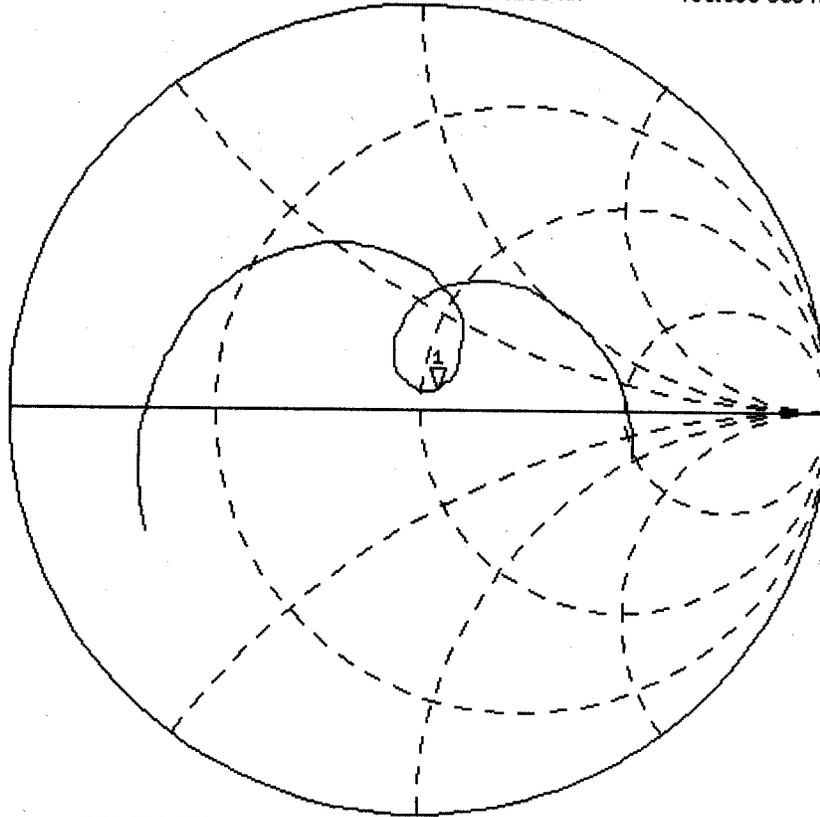

START 350.000 000 MHz

STOP 550.000 000 MHz

2. Validation Dipole Dimensions

Frequency (MHz)	L (mm)	h (mm)	d (mm)
300	420.0	250.0	6.2
450	288.0	167.0	6.2
835	161.0	89.8	3.6
900	149.0	83.3	3.6
1450	89.1	51.7	3.6
1800	72.0	41.7	3.6
1900	68.0	39.5	3.6
2000	64.5	37.5	3.6
2450	51.8	30.6	3.6
3000	41.5	25.0	3.6




3. Validation Phantom

The validation phantom was constructed using relatively low-loss tangent Plexiglas material. The inner dimensions of the phantom are as follows:

Length: 83.5 cm
 Width: 36.9 cm
 Height: 21.8 cm

The bottom section of the validation phantom is constructed of 6.2 ± 0.1 mm Plexiglas.

4. Dimensions of Plexiglas Planar Phantom

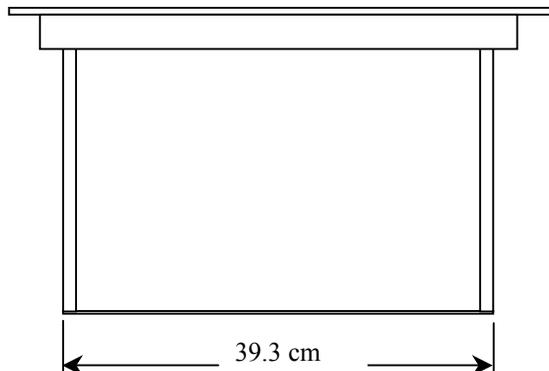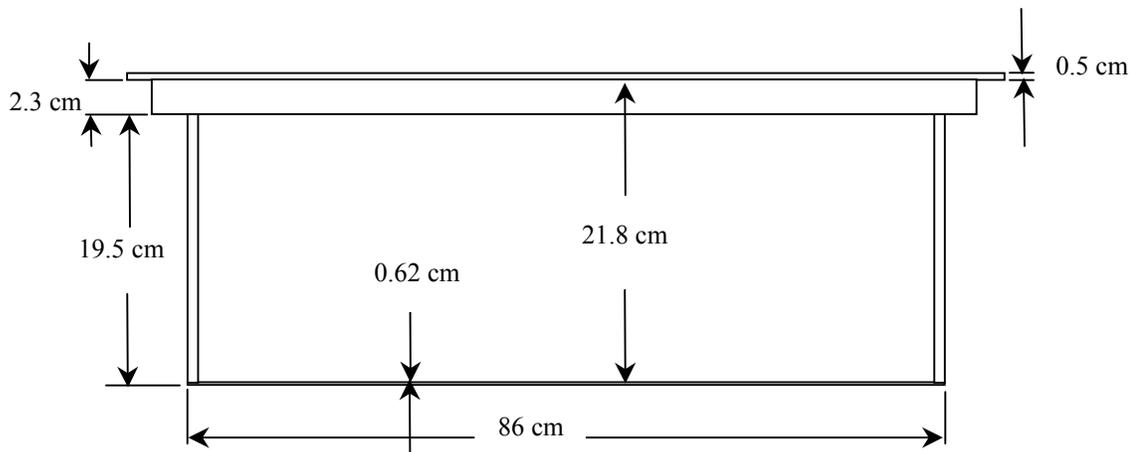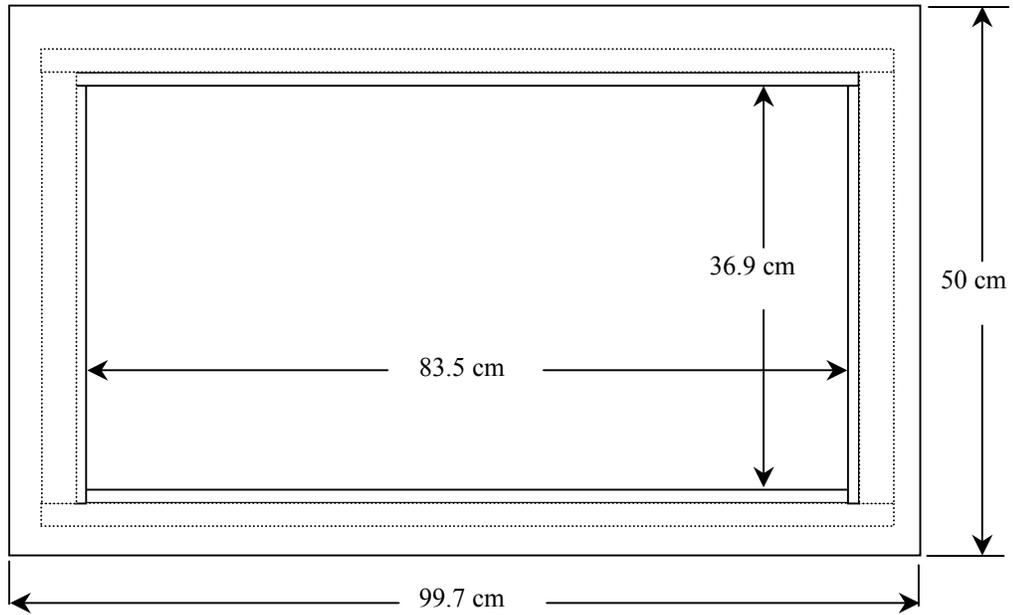

5. 450 MHz System Validation Setup



450 MHz Validation Dipole Setup



6. Measurement Conditions

The planar phantom was filled with brain simulating tissue having the following parameters at 450 MHz:

Relative Permittivity:	42.9
Conductivity:	0.85 mho/m
Fluid Temperature:	21.9 °C
Fluid Depth:	≥ 15.0 cm

Environmental Conditions:


Ambient Temperature:	22.4 °C
Humidity:	31 %
Barometric Pressure:	103.2 kPa

The 450 MHz simulated brain tissue mixture consists of the following ingredients:

Ingredient	Percentage by weight
Water	38.56%
Sugar	56.32%
Salt	3.95%
HEC	0.98%
Dowicil 75	0.19%
450 MHz Target Dielectric Parameters at 22 °C	$\epsilon_r = 43.5$ $\sigma = 0.87 \text{ S/m}$

7. SAR Measurement

The SAR measurement was performed with the E-field probe in mechanical detection mode only. The setup and determination of the forward power into the dipole was performed using the following procedures.

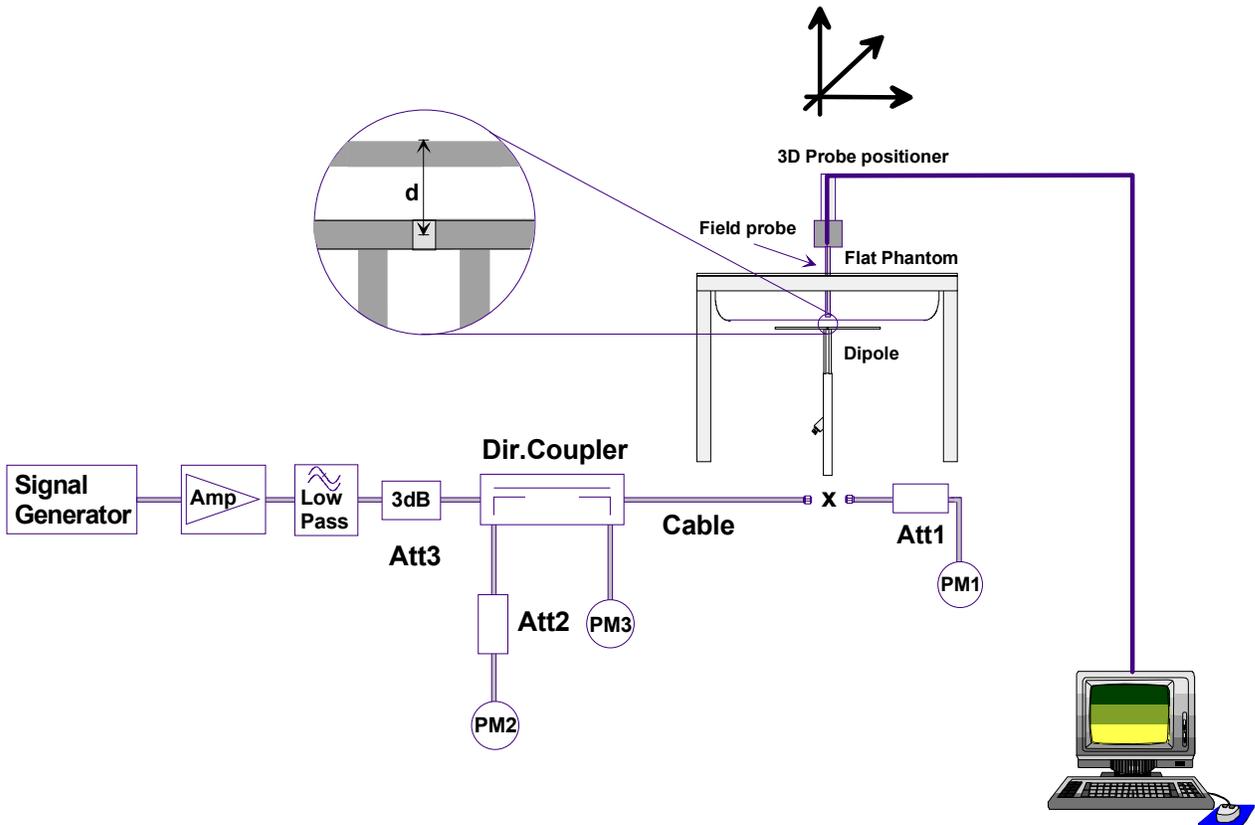

First the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the dipole connector (X). The signal generator is adjusted for the desired forward power at the dipole connector (taking into account the attenuation of Att1) as read by power meter PM2. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2. If the signal generator does not allow adjustment in 0.01dB steps, the remaining difference at PM2 must be taken into consideration. PM3 records the reflected power from the dipole to ensure that the value is not changed from the previous value. The reflected power should be 20dB below the forward power.

8. Validation Dipole SAR Test Results

Ten SAR measurements were performed in order to achieve repeatability and to establish an average target value.

Validation Measurement	SAR @ 0.25W Input averaged over 1g	SAR @ 1W Input averaged over 1g	SAR @ 0.25W Input averaged over 10g	SAR @ 1W Input averaged over 10g	Peak SAR @ 0.25W Input
Test 1	1.22	4.88	0.782	3.128	1.29
Test 2	1.23	4.92	0.791	3.164	1.30
Test 3	1.23	4.92	0.789	3.156	1.30
Test 4	1.23	4.92	0.790	3.160	1.31
Test 5	1.24	4.96	0.793	3.172	1.31
Test 6	1.24	4.96	0.792	3.168	1.31
Test 7	1.23	4.92	0.791	3.164	1.31
Test 8	1.23	4.92	0.789	3.156	1.30
Test 9	1.24	4.96	0.791	3.164	1.31
Test 10	1.23	4.92	0.789	3.156	1.31
Average Value	1.23	4.93	0.790	3.16	1.31

The results have been normalized to 1W (forward power) into the dipole.

IEEE Target over 1cm³ (1g) of tissue: 4.9 mW/g (+/- 10%)

Averaged over 1cm (1g) of tissue: 4.93 mW/g (deviation +0.6%)

IEEE Target over 10cm³ (10g) of tissue: 3.3 mW/g (+/- 10%)

Averaged over 10cm (10g) of tissue: 3.16 mW/g (deviation -4.2%)

450 MHz System Validation - November 4, 2004

DUT: Dipole 450 MHz; Model: D450V2; Serial: 136; Calibrated: 11/04/2004

Ambient Temp: 22.4 °C; Fluid Temp: 21.9 °C; Barometric Pressure: 103.2 kPa; Humidity: 31%

Communication System: CW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450 ($\sigma = 0.85$ mho/m; $\epsilon_r = 42.9$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(7.5, 7.5, 7.5); Calibrated: 18/03/2004

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 14/05/2004

- Phantom: Validation Planar; Type: Plexiglas; Serial: 137

- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

450 MHz System Validation/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

450 MHz System Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 39.3 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 2.15 W/kg

SAR(1 g) = 1.22 mW/g; SAR(10 g) = 0.782 mW/g

450 MHz System Validation/Zoom Scan 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 39.2 V/m; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 2.16 W/kg

SAR(1 g) = 1.23 mW/g; SAR(10 g) = 0.791 mW/g

450 MHz System Validation/Zoom Scan 3 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 39.1 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 2.16 W/kg

SAR(1 g) = 1.23 mW/g; SAR(10 g) = 0.789 mW/g

450 MHz System Validation/Zoom Scan 4 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 39.2 V/m; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 2.18 W/kg

SAR(1 g) = 1.23 mW/g; SAR(10 g) = 0.790 mW/g

450 MHz System Validation/Zoom Scan 5 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 39.2 V/m; Power Drift = 0.009 dB

Peak SAR (extrapolated) = 2.18 W/kg

SAR(1 g) = 1.24 mW/g; SAR(10 g) = 0.793 mW/g

450 MHz System Validation/Zoom Scan 6 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 39.1 V/m; Power Drift = 0.007 dB

Peak SAR (extrapolated) = 2.18 W/kg

SAR(1 g) = 1.24 mW/g; SAR(10 g) = 0.792 mW/g

450 MHz System Validation/Zoom Scan 7 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 39.2 V/m; Power Drift = 0.004 dB

Peak SAR (extrapolated) = 2.18 W/kg

SAR(1 g) = 1.23 mW/g; SAR(10 g) = 0.791 mW/g

450 MHz System Validation/Zoom Scan 8 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 39.2 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 2.16 W/kg

SAR(1 g) = 1.23 mW/g; SAR(10 g) = 0.789 mW/g

450 MHz System Validation/Zoom Scan 9 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 39.4 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 2.19 W/kg


SAR(1 g) = 1.24 mW/g; SAR(10 g) = 0.791 mW/g

450 MHz System Validation/Zoom Scan 10 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 39.1 V/m; Power Drift = 0.007 dB

Peak SAR (extrapolated) = 2.16 W/kg

SAR(1 g) = 1.23 mW/g; SAR(10 g) = 0.789 mW/g

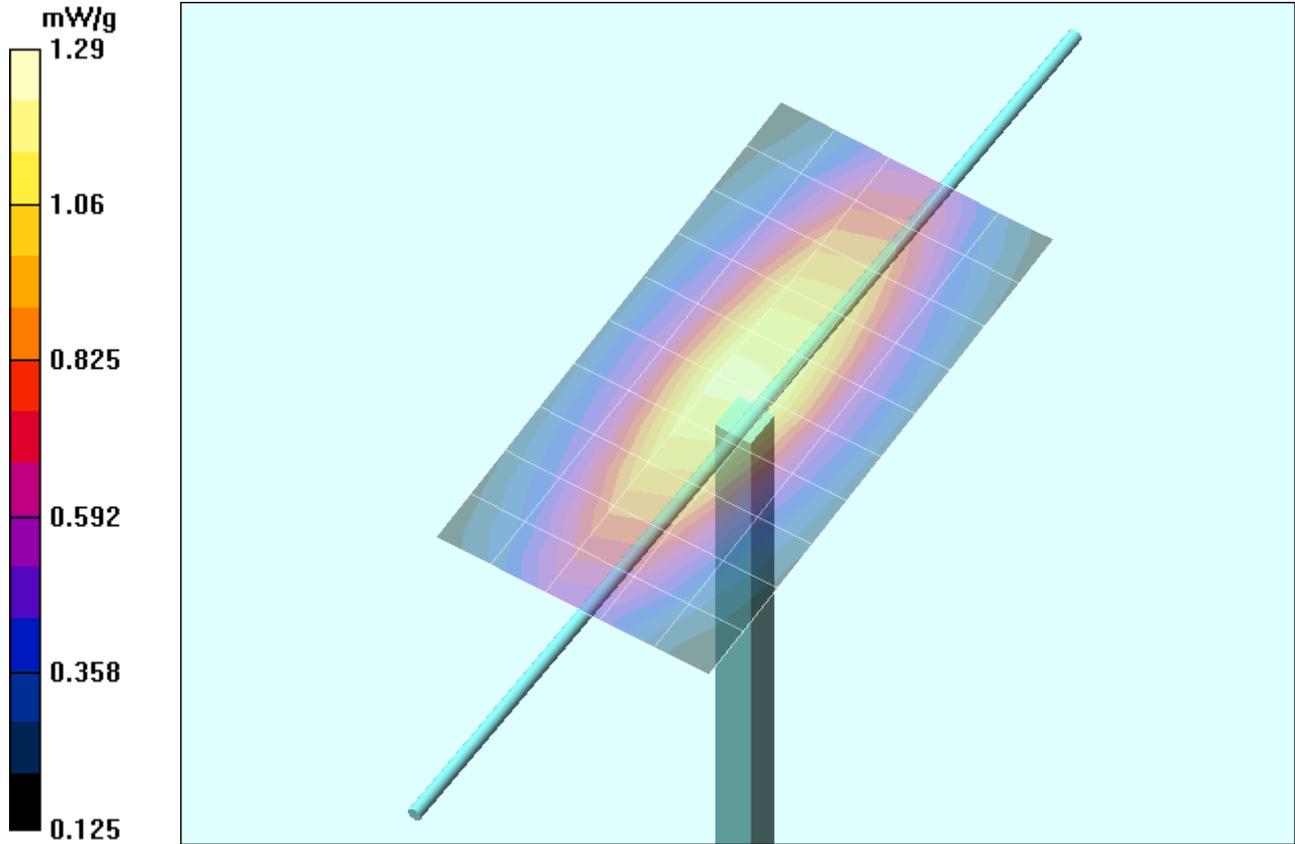

1 g average of 10 measurements: 1.23 mW/g
 10 g average of 10 measurements: 0.790 mW/g

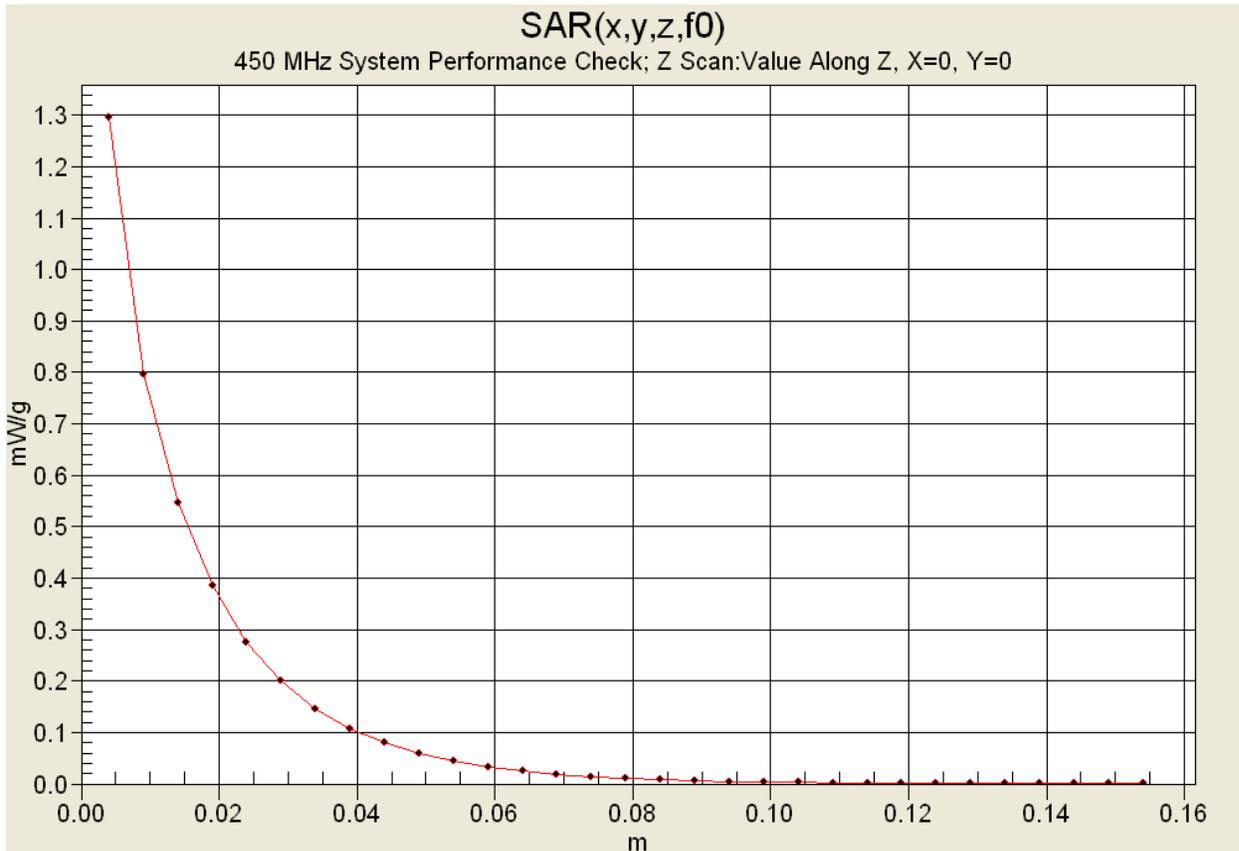

450MHz System Validation

Measured Fluid Dielectric Parameters (Brain)

November 04, 2004

Frequency	ϵ'	ϵ''
350.000000 MHz	45.3974	39.4988
360.000000 MHz	45.0834	38.7858
370.000000 MHz	44.8651	38.1777
380.000000 MHz	44.6622	37.6103
390.000000 MHz	44.3761	37.1472
400.000000 MHz	44.1745	36.5919
410.000000 MHz	43.8392	36.0417
420.000000 MHz	43.6277	35.5608
430.000000 MHz	43.3443	34.9958
440.000000 MHz	43.1200	34.5629
450.000000 MHz	42.8999	34.1583
460.000000 MHz	42.7154	33.7478
470.000000 MHz	42.4773	33.4083
480.000000 MHz	42.2998	33.0563
490.000000 MHz	42.0302	32.7340
500.000000 MHz	41.8641	32.3576
510.000000 MHz	41.6518	31.9703
520.000000 MHz	41.4863	31.6232
530.000000 MHz	41.2685	31.3144
540.000000 MHz	41.1027	30.8977
550.000000 MHz	40.9455	30.6347