



EMC TEST REPORT

Report No.: 20250617G13709X-W1

Product Name: Cobra-SC400D

Model No. : SC 400D

FCC ID: BBOSC400D2

IC: 906A-SC400D2

Trade Name: Cobra

Applicant: Cobra Electronics Corporation

Address: 1701 Golf Road Suite 3-900, Rolling Meadows, IL 60008, UnitedStates.

Received Date: 2025.06.09

Dates of Testing: 2025.06.10~2025.06.13

Issued by: CCIC Southern Testing Co., Ltd.

Lab Location: Electronic Testing Building, No.43, Shahe Road, Xili Street, Nanshan District, Shenzhen, Guangdong, China.

Report Query E-Mail: manager@ccic-set.com

Feedback E-Mail: integrity@ccic-set.com

Report Query Tel: 0755-26627338

Feedback Tel: 0755-86185963

This test report consists of **16** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product Name..... Cobra-SC400D

Model No. SC 400D

Applicant..... Cobra Electronics Corporation

Applicant Address..... 1701 Golf Road Suite 3-900, Rolling Meadows, IL 60008,
UnitedStates.

Manufacturer..... Cobra Electronics Corporation

Manufacturer Address..... 1701 Golf Road Suite 3-900, Rolling Meadows, IL 60008,
UnitedStates.

Test Standards 47 CFR Part 15 Subpart B
ICES-003 Issue 7

Test Result..... PASS

Tested by Deng Shanfei
Deng Shanfei, Test Engineer 2025.06.20

Reviewed by Sun Jiaohui
Sun Jiaohui, Senior Engineer 2025.06.20

Approved by Chris You
Chris You, Manager 2025.06.20



TABLE OF CONTENTS

- 1. GENERAL INFORMATION4**
- 1.1 EUT Description.....4**
- 1.2 Test Standards and Results5**
- 1.3 Facilities and Accreditations6**
- 1.3.1 Facilities6
- 1.3.2 Test Environment Conditions6
- 1.3.3 Measurement Uncertainty7
- 2. TEST CONDITIONS SETTING8**
- 2.1 Test Peripherals8**
- 2.2 Test Mode8**
- 2.3 Test Setup and Equipment List.....9**
- 2.3.1 Radiated Emission9
- 3. 47 CFR PART 15B REQUIREMENTS 11**
- 3.1 Radiated Emission..... 11**
- 3.1.1 Requirement 11
- 3.1.2 Test Description..... 12
- 3.1.3 Test Result 12

| Change History | | |
|----------------|------------|-------------------|
| Issue | Date | Reason for change |
| 1.0 | 2025.06.20 | First edition |
| | | |
| | | |



1. GENERAL INFORMATION

1.1 EUT Description

| | |
|-------------------|--------------|
| EUT Name | Cobra-SC400D |
| Trade Name..... | Cobra |
| Power supply..... | DC 12/24V |

Note1: The EUT is a Cobra-SC400D;

Note2: For a more detailed description, please refer to Specification or User’s Manual supplied by the applicant and/or manufacturer.



1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B & ICES-003:

| No. | Identity | Document Title |
|-----|-----------------------------|--|
| 1 | 47 CFR Part 15 Subpart B | Radio Frequency Devices |
| 2 | ICES-003 Issue 7 | Information Technology Equipment (Including Digital Apparatus) — Limits and Methods of Measurement |

Test detailed items/section required by FCC & ISED rules and results are as below:

| No. | Section | Description | Result |
|-----|---------|--------------------|--------|
| 1 | 15.107 | Conducted Emission | N.A.2 |
| 2 | 15.109 | Radiated Emission | PASS |

NOTE:

(1) The EUT has been tested according to 47 CFR Part 15 Subpart B, Class B. The test procedure is according to ANSI C63.4:2014.

(2) AC conduction is not applicable because the product is 12/24V DC power supply.



1.3 Facilities and Accreditations

1.3.1 Facilities

CCIC-SET Lab 1

Address: Electronic Testing Building, No.43, Shahe Road, Xili Street, Nanshan District, Shenzhen, Guangdong, China

FCC-Registration No.: CN1283

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283.

ISED Registration: 11185A, CAB number: CN0064

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A.

A2LA Code: 5721.01

CCIC-SET is a third party testing organization accredited by A2LA according to ISO/IEC 17025. The accreditation certificate number is 5721.01.

CNAS L1659

CCIC Southern Testing Co., Ltd. CCIC is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659.

CCIC-SET Lab 4

Address: No.125, Hongmei Section, Wangsha Road, Hongmei Town, Dongguan City, Guangdong Province, China

CNAS L1659

CCIC Southern Testing Co., Ltd. CCIC is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

| | |
|------------------------|-------------|
| Temperature (°C): | 15°C - 35°C |
| Relative Humidity (%): | 25% -75% |



| | |
|-----------------------------|--------------|
| Atmospheric Pressure (kPa): | 86kPa-106kPa |
|-----------------------------|--------------|

1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

| | |
|---|-------------------|
| Uncertainty of Conducted Emission: | Uc = 3.2 dB (k=2) |
| Uncertainty of Radiated Emission: (30MHz~1GHz) | Uc = 5.8 dB (k=2) |
| Uncertainty of Radiated Emission: (1~6GHz) | Uc = 5.1 dB (k=2) |
| Uncertainty of Radiated Emission: (6~18GHz) | Uc = 5.5 dB (k=2) |



2. TEST CONDITIONS SETTING

2.1 Test Peripherals

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Support Equipment:

| Description | Brand name | Model | Serial No. | FCCID |
|-------------|------------|-------|------------|-------|
| / | / | / | / | / |

Support Cable:

| Description | Shield Type | Ferrite Core | Length |
|----------------|---------------|--------------|--------|
| DC Power Cable | Un- shielding | / | 1.5m |

2.2 Test Mode

Note 1: The EUT have the following typical setups during the test: It could support the following operating mode and frequency band:

Bluetooth; 2.4G/5G WIFI; GPS;

Setup1: Bluetooth + EUT working + DC Power Supply (12/24V);

Setup2: 2.4G WIFI + EUT working + DC Power Supply (12/24V);

Setup3: 5G WIFI + EUT working + DC Power Supply (12/24V);

Setup4: GPS + EUT working + DC Power Supply (12/24V);


Note 2: Only the worst test patterns are recorded in the report.

2.3 Test Setup and Equipment List


2.3.1 Radiated Emission

A. Test Setup:

- 1) For radiated emissions from 30MHz to 1GHz

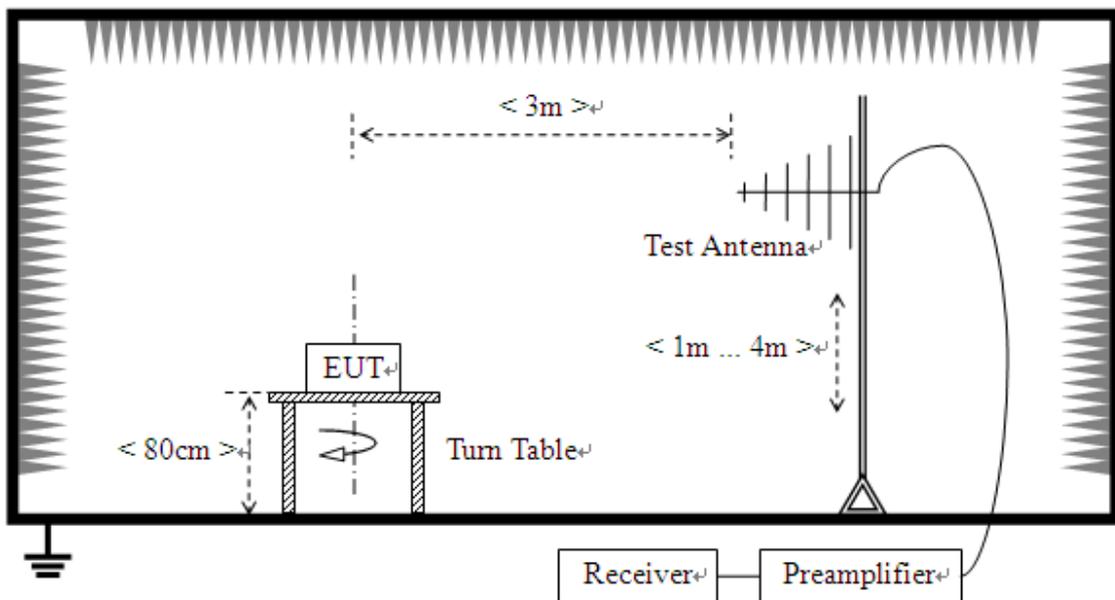

- 2) For radiated emissions above 1GHz

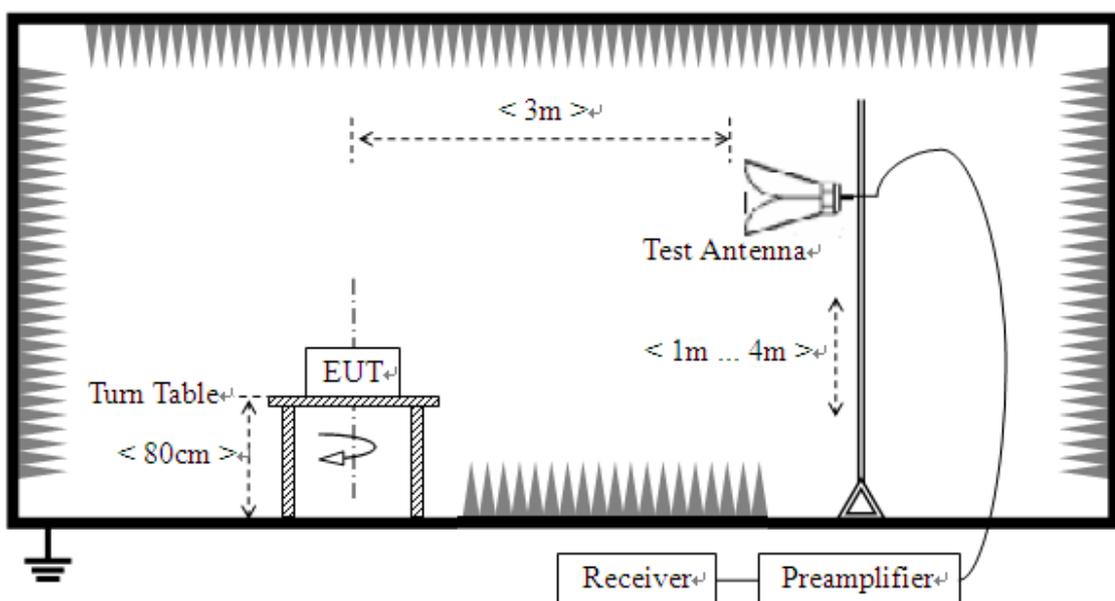

**B. Test Procedure**

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:

- 1) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

C. Equipments List:

| Description | Manufacturer | Model | Serial No. | Calibration Date | Calibration Due. Date |
|---------------------|---------------|---------------------------|------------|------------------|-----------------------|
| EMI Test Receiver | ROHDE&SCHWARZ | ESIB7 | A0501375 | 2025.01.12 | 2026.01.11 |
| Broadband Ant. | ETC | MCTD2786 | A150402239 | 2025.04.26 | 2026.04.25 |
| 3M Anechoic Chamber | Albatross | SAC-3MAC 9*6*6m | A0412375 | 2024.02.28 | 2027.02.27 |
| EMI Test Receiver | ROHDE&SCHWARZ | ESW26 | A180502935 | 2025.04.24 | 2026.04.23 |
| 5M Anechoic Chamber | Albatross | SAC-5MAC 12.8x6.8x6.4m | A0304210 | 2024.06.08 | 2027.06.07 |
| EMI Horn Ant. | ROHDE&SCHWARZ | HF906 | A0304225 | 2025.03.22 | 2028.03.21 |



3. 47 CFR PART 15B REQUIREMENTS

3.1 Radiated Emission

3.1.1 Requirement

According to FCC section 15.109 and ICES-003, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

| Frequency range (MHz) | Field Strength | | Field Strength Limitation at 3m Measurement Dist | |
|-----------------------|-----------------|------|--|---------------------|
| | $\mu\text{V/m}$ | Dist | ($\mu\text{V/m}$) | (dBuV/m) |
| 30.0 - 88.0 | 100 | 3m | 100 | 20log 100 |
| 88.0 - 216.0 | 150 | 3m | 150 | 20log 150 |
| 216.0 - 960.0 | 200 | 3m | 200 | 20log 200 |
| Above 960.0 | 500 | 3m | 500 | 20log 500 |

- For frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.
- Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.
- For below 1G: QP detector RBW 120 kHz, VBW 300 kHz.

For Above 1G: PK detector RBW 1MHz, VBW 3MHz for PK value; AV detector RBW 1MHz, VBW 10Hz for AV value.

Note:

- The tighter limit shall apply at the boundary between two frequency range.
- Limitation expressed in dBuV/m is calculated by $20\log$ Emission Level($\mu\text{V/m}$).
- If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of $Ld1 = Ld2 * (d2/d1)^2$.

Example:

F.S Limit at 30m distance is $30\mu\text{V/m}$, then F.S Limitation at 3m distance is adjusted as

$$Ld1 = L1 = 30\mu\text{V/m} * (10)^2 = 100 * 30\mu\text{V/m}.$$



3.1.2 Test Description

See section 2.3.2 of this report.

3.1.3 Test Result


The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.



A. Radiation disturbances, antenna polarization: Vertical, Setup1, DC 12V

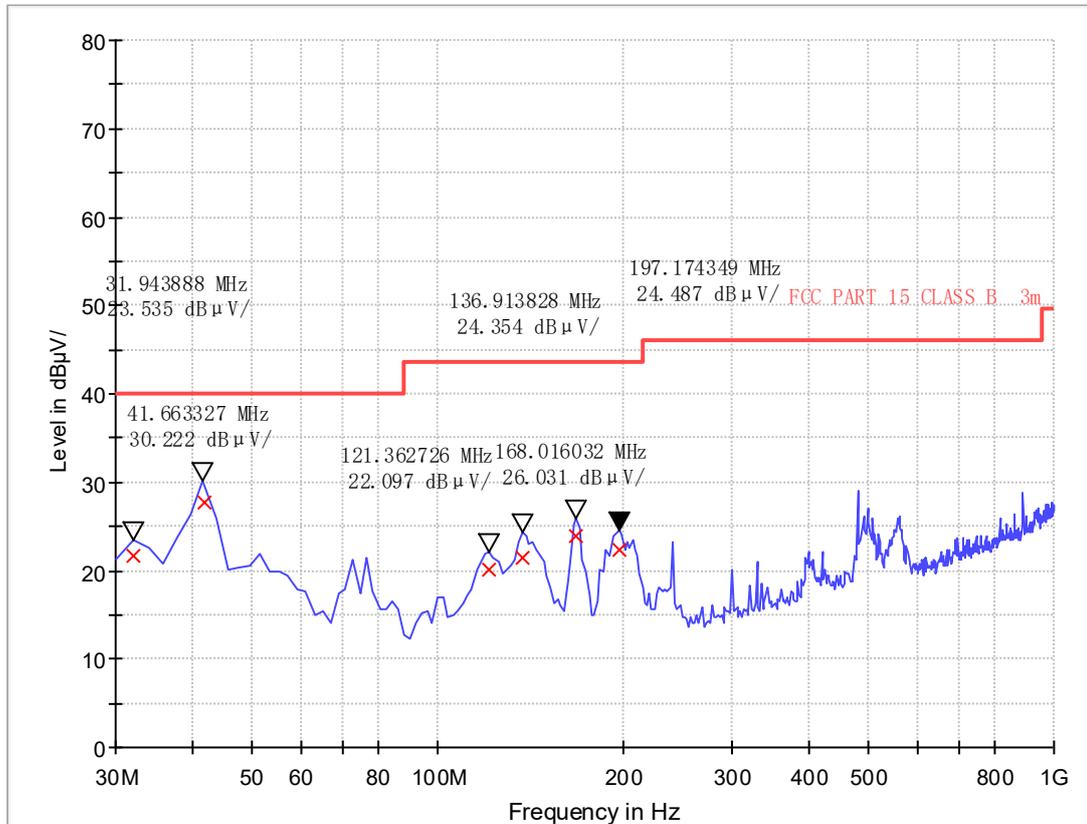


(Plot C: Test Antenna Vertical 30M - 1G)

| Frequency (MHz) | QuasiPeak (dB µ V/m) | Bandwidth (kHz) | Antenna height (cm) | Limit (dB µ V/m) | Margin (dB) | Antenna | Verdict |
|-----------------|----------------------|-----------------|---------------------|------------------|-------------|----------|---------|
| 31.96 | 21.74 | 120.000 | 103 | 40.0 | 18.26 | Vertical | Pass |
| 41.68 | 27.72 | 120.000 | 107 | 40.0 | 12.28 | Vertical | Pass |
| 121.36 | 20.14 | 120.000 | 102 | 43.5 | 23.36 | Vertical | Pass |
| 136.92 | 21.45 | 120.000 | 106 | 43.5 | 22.05 | Vertical | Pass |
| 168.00 | 23.91 | 120.000 | 107 | 43.5 | 19.59 | Vertical | Pass |
| 197.16 | 22.41 | 120.000 | 104 | 43.5 | 21.09 | Vertical | Pass |



B. Radiation disturbances, antenna polarization: Horizontal, Setup1, DC 12V

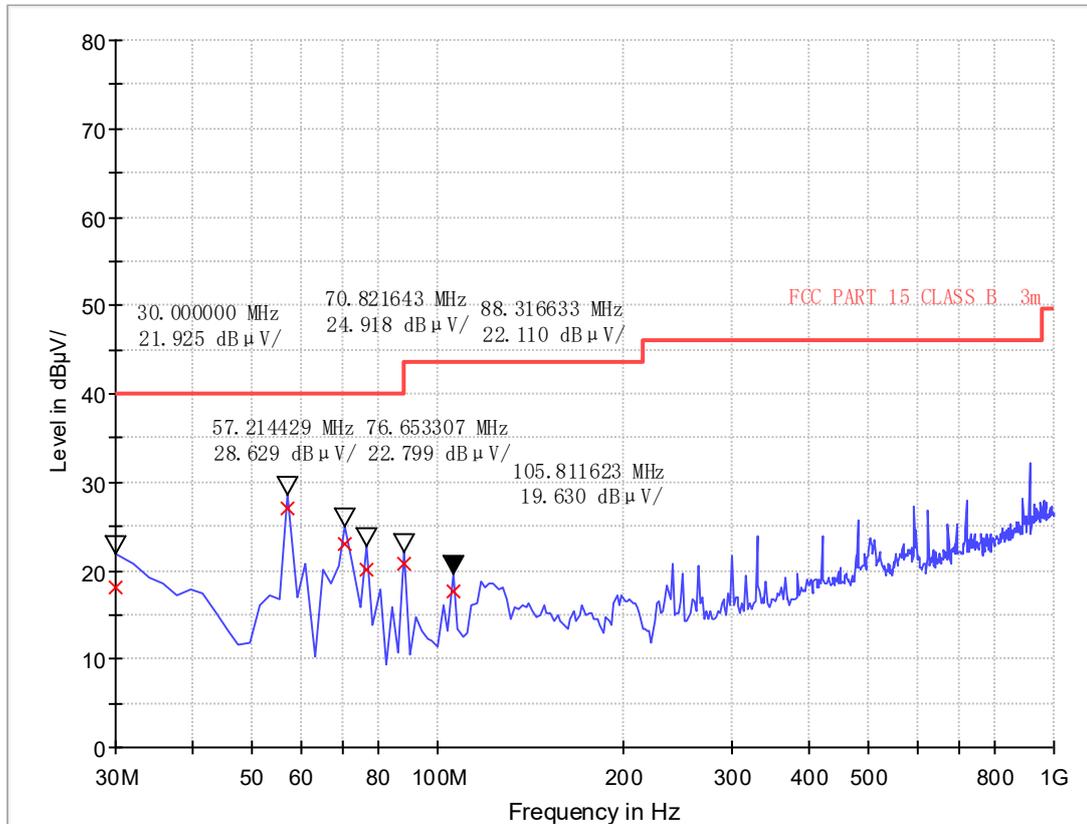


(Plot D: Test Antenna Horizontal 30M - 1G)

| Frequency (MHz) | QuasiPeak (dB µ V/m) | Bandwidth (kHz) | Antenna height (cm) | Limit (dB µ V/m) | Margin (dB) | Antenna | Verdict |
|-----------------|----------------------|-----------------|---------------------|------------------|-------------|------------|---------|
| 30.00 | 18.05 | 120.000 | 102 | 40.0 | 21.95 | Horizontal | Pass |
| 57.20 | 27.02 | 120.000 | 108 | 40.0 | 12.98 | Horizontal | Pass |
| 70.84 | 23.10 | 120.000 | 103 | 40.0 | 16.90 | Horizontal | Pass |
| 76.64 | 20.15 | 120.000 | 106 | 40.0 | 19.85 | Horizontal | Pass |
| 88.32 | 20.78 | 120.000 | 102 | 43.5 | 22.72 | Horizontal | Pass |
| 105.80 | 17.70 | 120.000 | 105 | 43.5 | 25.80 | Horizontal | Pass |



A. Radiation disturbances, antenna polarization: Horizontal, Setup1, DC 12V

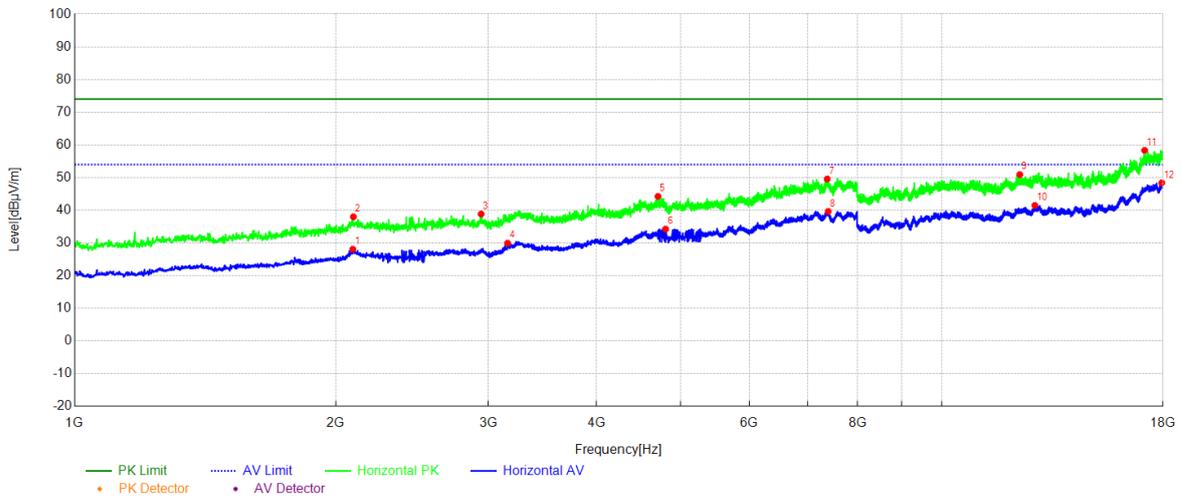


(Plot M: Test Antenna Horizontal 1G – 18G)

| NO. | Freq. [MHz] | Level [dBµV/m] | Factor [dB] | Limit [dBµV/m] | Margin [dBµV/m] | Trace | Height [cm] | Angle [°] | Polarity |
|-----|-------------|----------------|-------------|----------------|-----------------|-------|-------------|-----------|------------|
| 1 | 2093.21 | 28.09 | -11.73 | 54.00 | 25.91 | AV | 107 | 53 | Horizontal |
| 2 | 2096.61 | 38.00 | -11.64 | 74.00 | 36.00 | PK | 102 | 37 | Horizontal |
| 3 | 2943.29 | 38.85 | -11.36 | 74.00 | 35.15 | PK | 106 | 344 | Horizontal |
| 4 | 3157.52 | 29.93 | -9.67 | 54.00 | 24.07 | AV | 106 | 232 | Horizontal |
| 5 | 4708.07 | 44.23 | -5.24 | 74.00 | 29.77 | PK | 103 | 46 | Horizontal |
| 6 | 4803.28 | 34.25 | -5.23 | 54.00 | 19.75 | AV | 108 | 25 | Horizontal |
| 7 | 7379.04 | 49.56 | 1.17 | 74.00 | 24.44 | PK | 101 | 283 | Horizontal |
| 8 | 7397.74 | 39.65 | 1.32 | 54.00 | 14.35 | AV | 104 | 308 | Horizontal |
| 9 | 12304.43 | 50.92 | 4.56 | 74.00 | 23.08 | PK | 105 | 191 | Horizontal |
| 10 | 12807.68 | 41.48 | 5.25 | 54.00 | 12.52 | AV | 102 | 198 | Horizontal |
| 11 | 17139.71 | 58.33 | 11.07 | 74.00 | 15.67 | PK | 109 | 24 | Horizontal |
| 12 | 17938.79 | 48.39 | 13.20 | 54.00 | 5.61 | AV | 106 | 155 | Horizontal |



B. Radiation disturbances, antenna polarization: Vertical, Setup1, DC 12V

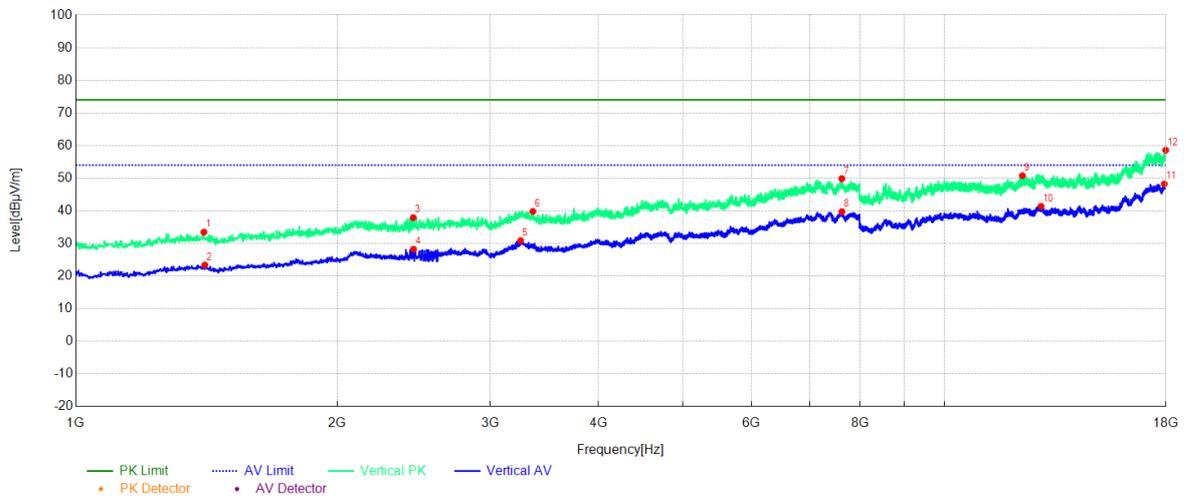

(Plot N: Test Antenna Vertical 1G – 18G)

| NO. | Freq. [MHz] | Level [dBµV/m] | Factor [dB] | Limit [dBµV/m] | Margin [dBµV/m] | Trace | Height [cm] | Angle [°] | Polarity |
|-----|-------------|----------------|-------------|----------------|-----------------|-------|-------------|-----------|----------|
| 1 | 1404.64 | 33.49 | -15.49 | 74.00 | 40.51 | PK | 103 | 354 | Vertical |
| 2 | 1408.04 | 23.40 | -15.55 | 54.00 | 30.60 | AV | 107 | 43 | Vertical |
| 3 | 2446.84 | 37.92 | -13.65 | 74.00 | 36.08 | PK | 106 | 108 | Vertical |
| 4 | 2448.54 | 28.23 | -13.68 | 54.00 | 25.77 | AV | 102 | 102 | Vertical |
| 5 | 3252.73 | 30.88 | -7.81 | 54.00 | 23.12 | AV | 103 | 237 | Vertical |
| 6 | 3359.84 | 39.82 | -8.92 | 74.00 | 34.18 | PK | 109 | 13 | Vertical |
| 7 | 7622.16 | 49.87 | 1.05 | 74.00 | 24.13 | PK | 108 | 317 | Vertical |
| 8 | 7623.86 | 39.75 | 1.03 | 54.00 | 14.25 | AV | 104 | 76 | Vertical |
| 9 | 12301.03 | 50.77 | 4.57 | 74.00 | 23.23 | PK | 105 | 112 | Vertical |
| 10 | 12926.69 | 41.39 | 5.15 | 54.00 | 12.61 | AV | 101 | 58 | Vertical |
| 11 | 17921.79 | 48.23 | 13.36 | 54.00 | 5.77 | AV | 107 | 334 | Vertical |
| 12 | 17986.40 | 58.58 | 12.74 | 74.00 | 15.42 | PK | 103 | 171 | Vertical |

-----End of Report-----