


Appendix B

Peak Output Power




Marker 1 [T1] RBW 1 MHz RF Att 40 dB
Ref Lvl 0.73 dBm VBW 1 MHz
12.5 dBm 2.40188076 GHz SWT 5 ms Unit dBm

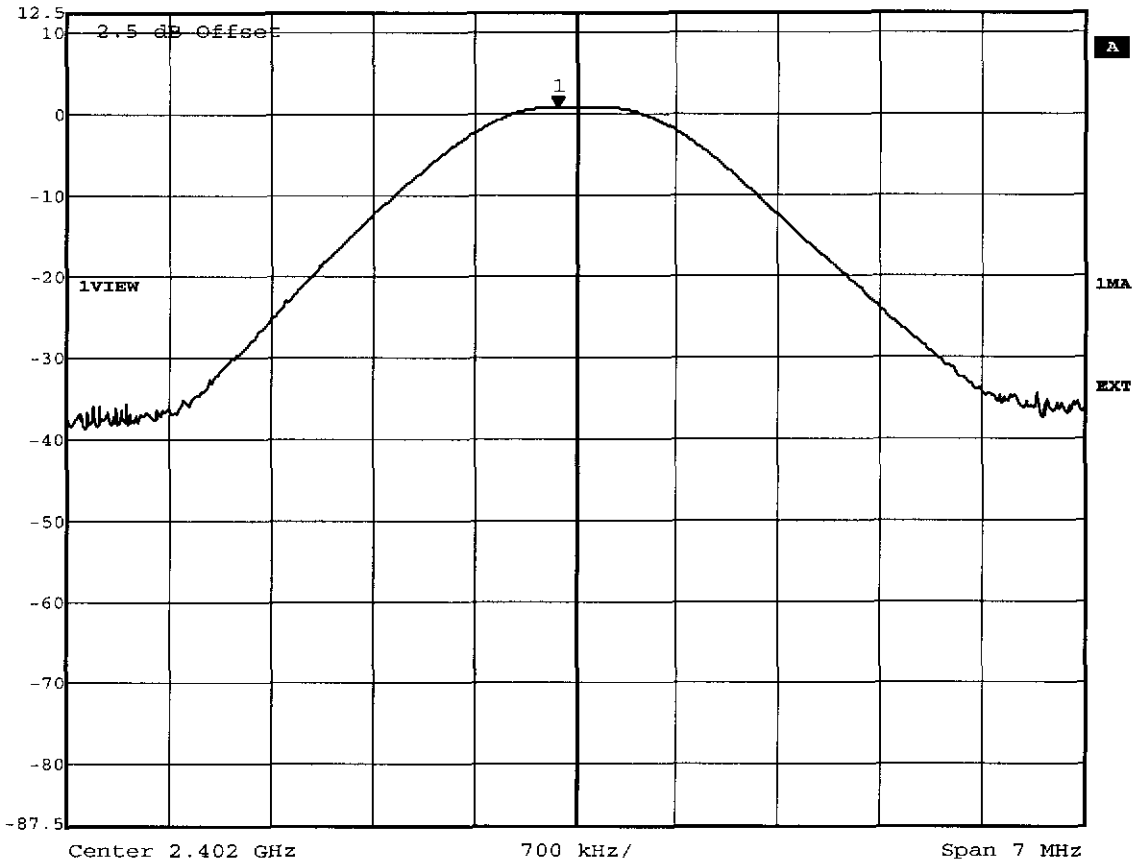

Title: Peak Output Power conducted Ch.: 0
Comment A: Jabra BT800
Date: 16.JUN.2004 07:36:45




Marker 1 [T1] RBW 1 MHz RF Att 40 dB
Ref Lvl 0.94 dBm VBW 1 MHz
15 dBm 2.44083868 GHz SWT 5 ms Unit dBm

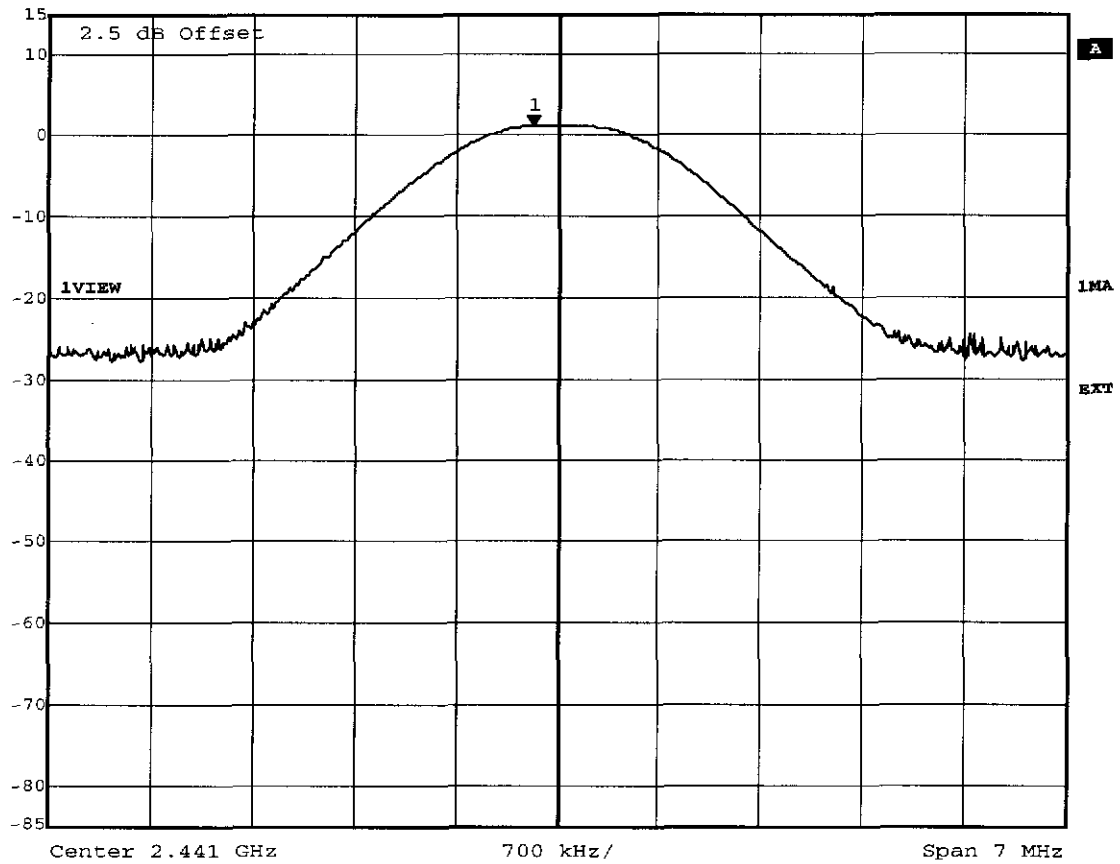

Title: Peak Output Power conducted Ch.: 39
Comment A: Jabra BT800
Date: 16.JUN.2004 07:38:41




Marker 1 [T1] RBW 1 MHz RF Att 40 dB
Ref Lvl 0.93 dBm VBW 1 MHz
15 dBm 2.47985271 GHz SWT 5 ms Unit dBm

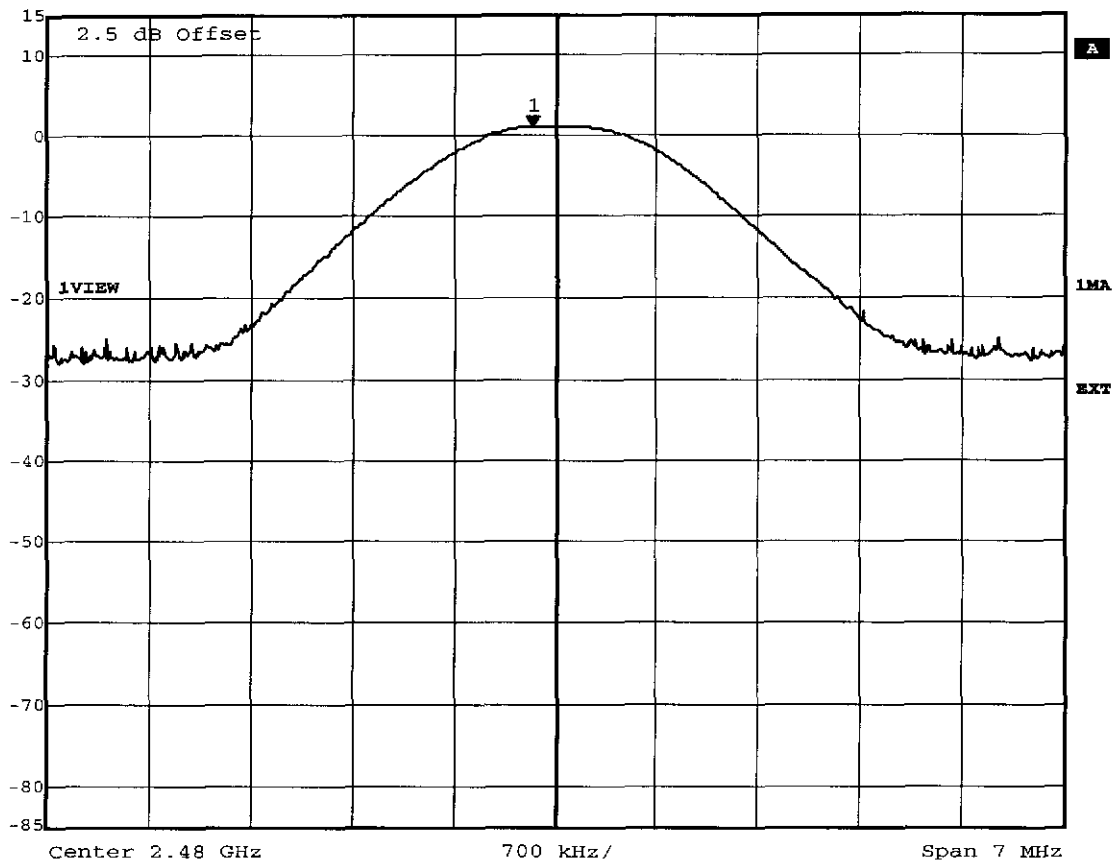

Title: Peak Output Power conducted Ch.: 78
Comment A: Jabra BT800
Date: 16.JUN.2004 07:39:30


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -6.44dBm, RBW: 5MHz

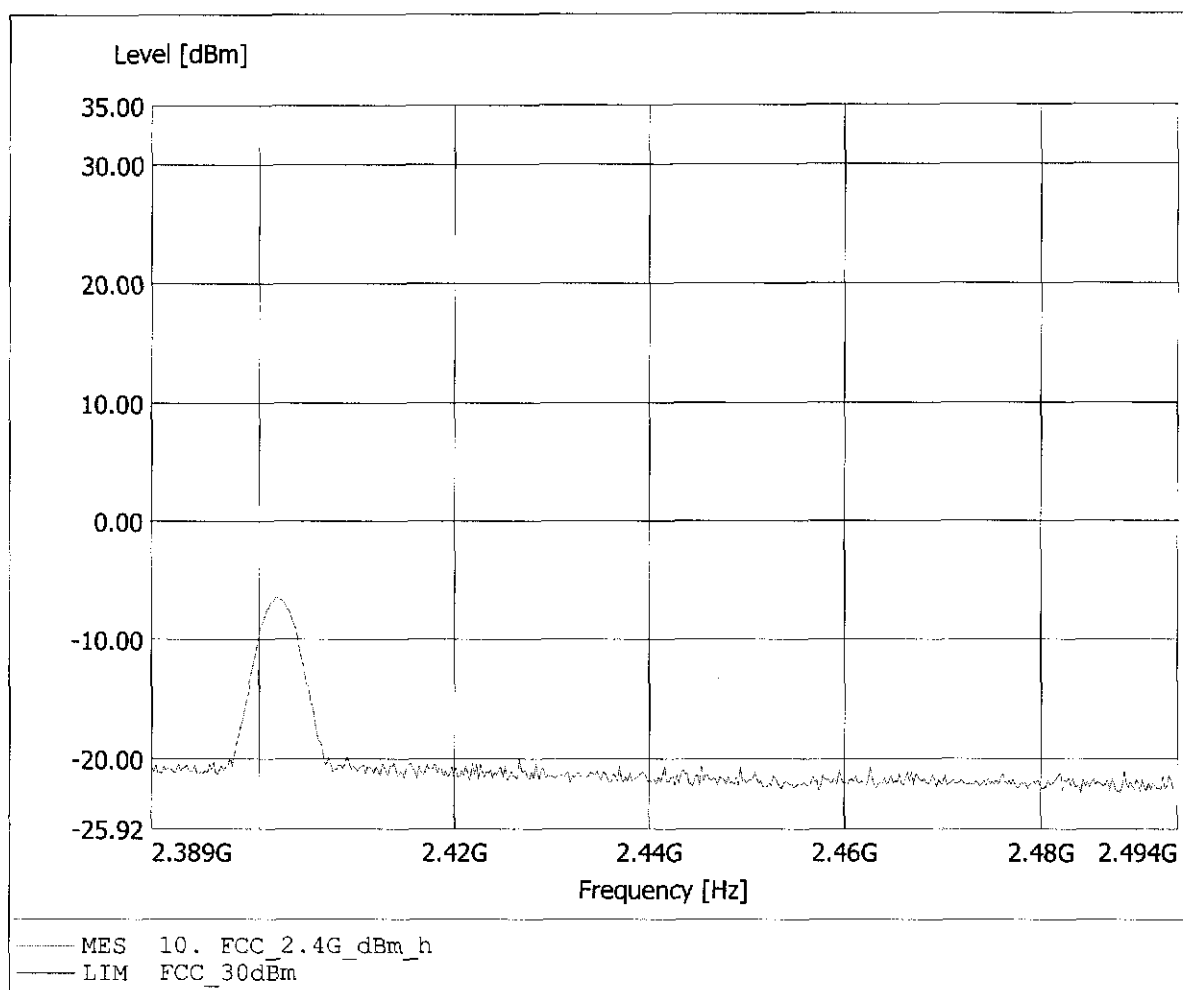


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -3.61dBm, RBW: 5MHz

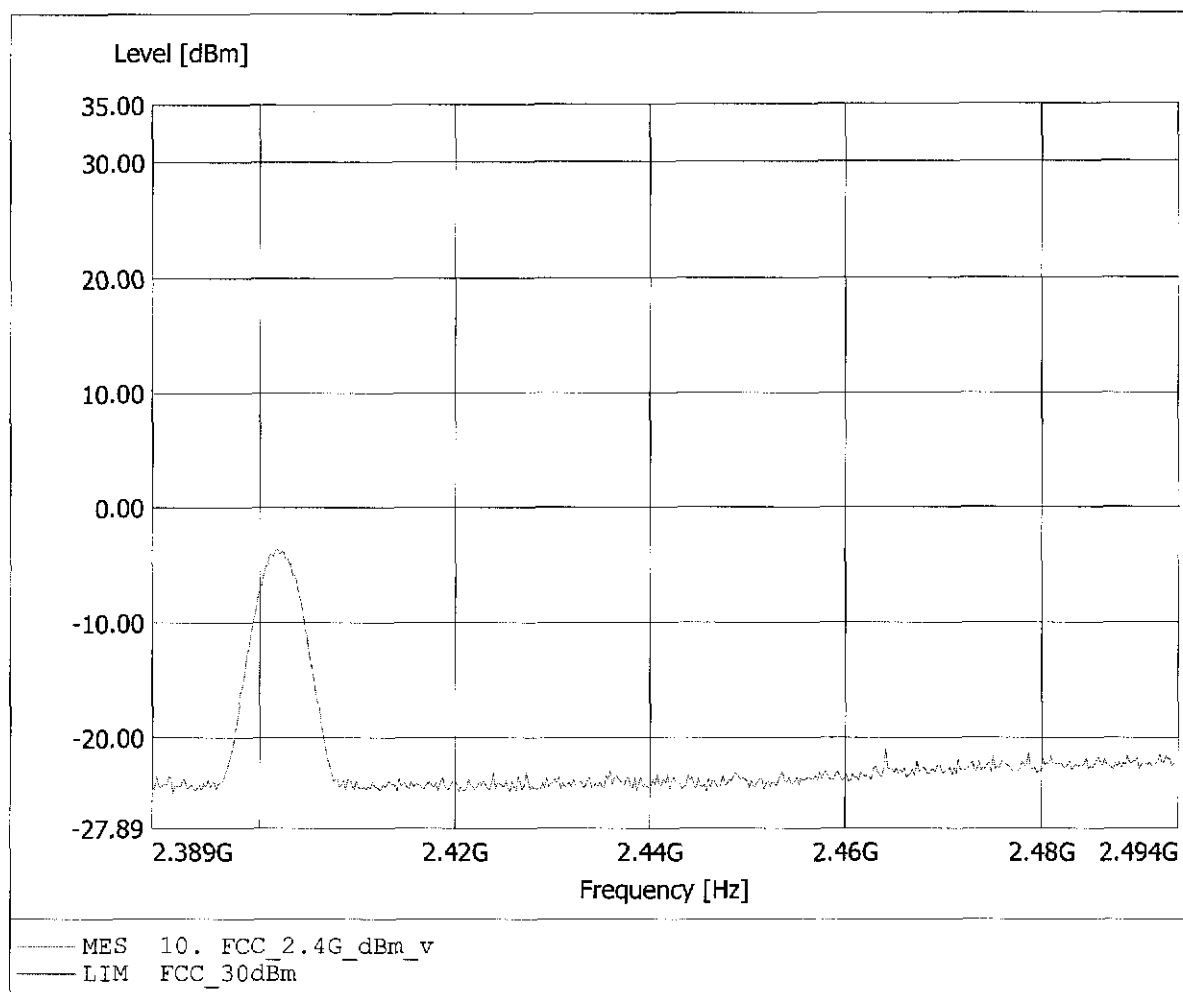


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -4.09dBm, RBW: 5MHz

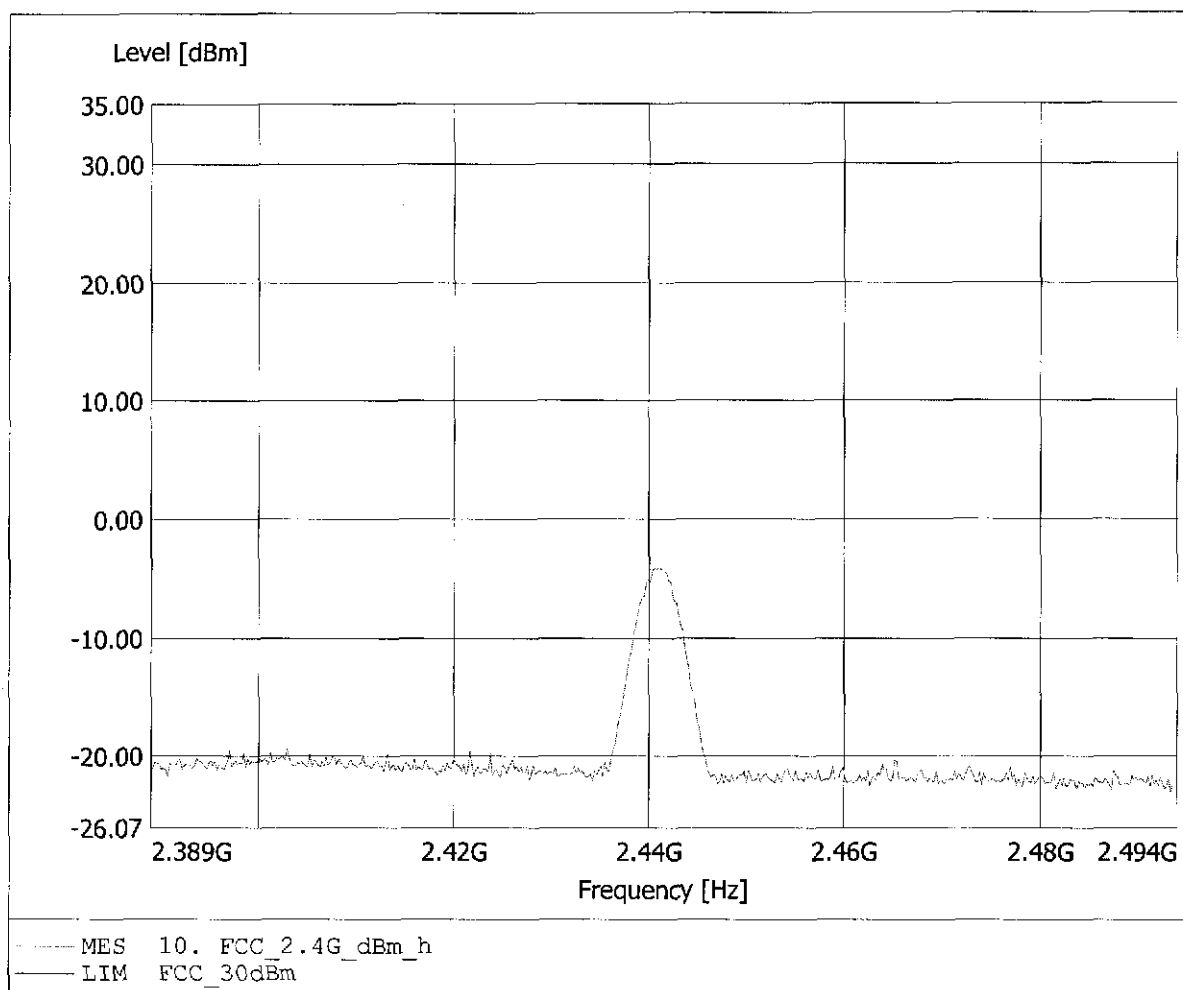


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -2.14dBm, RBW: 5MHz

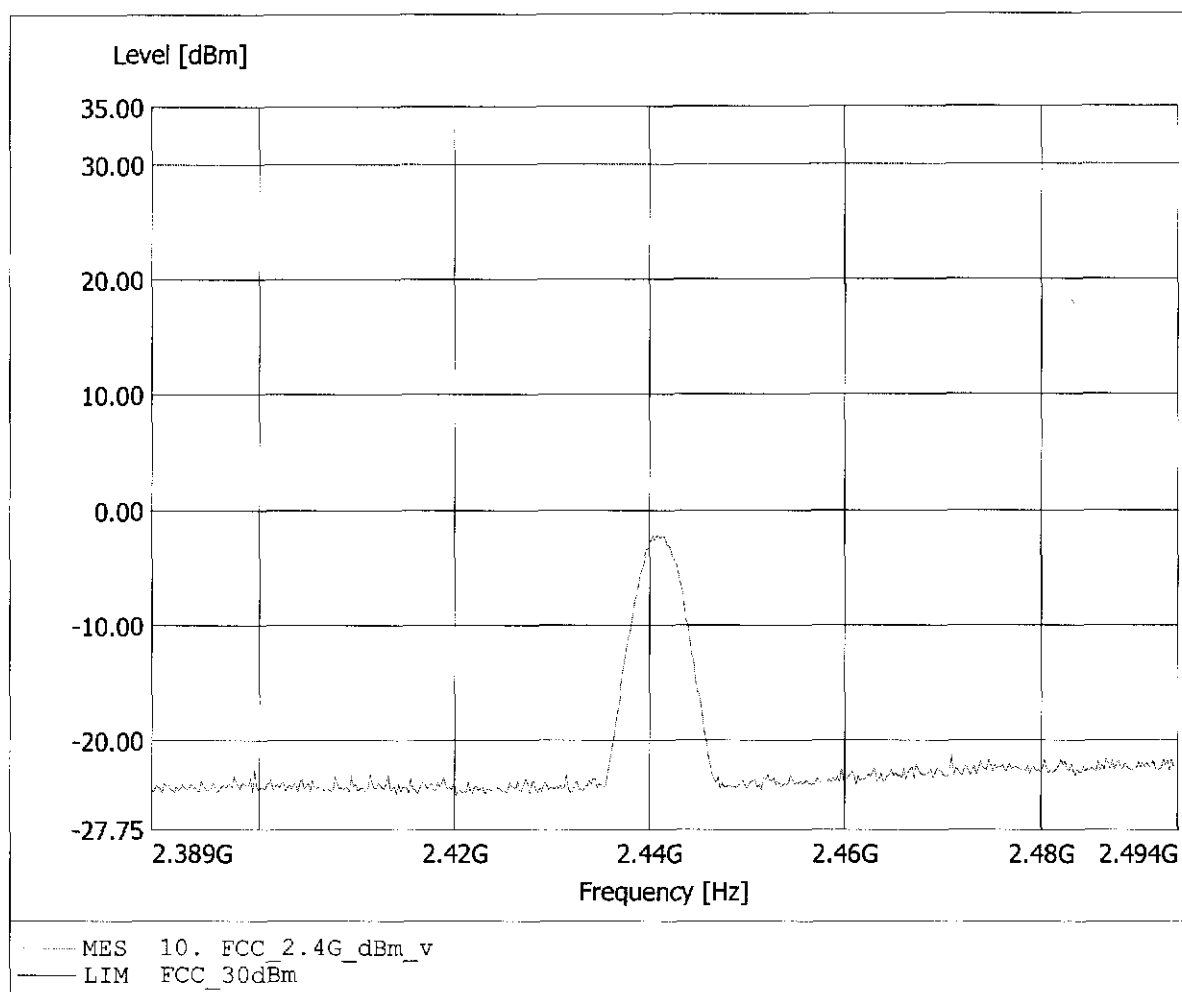


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -6.20dBm, RBW: 5MHz

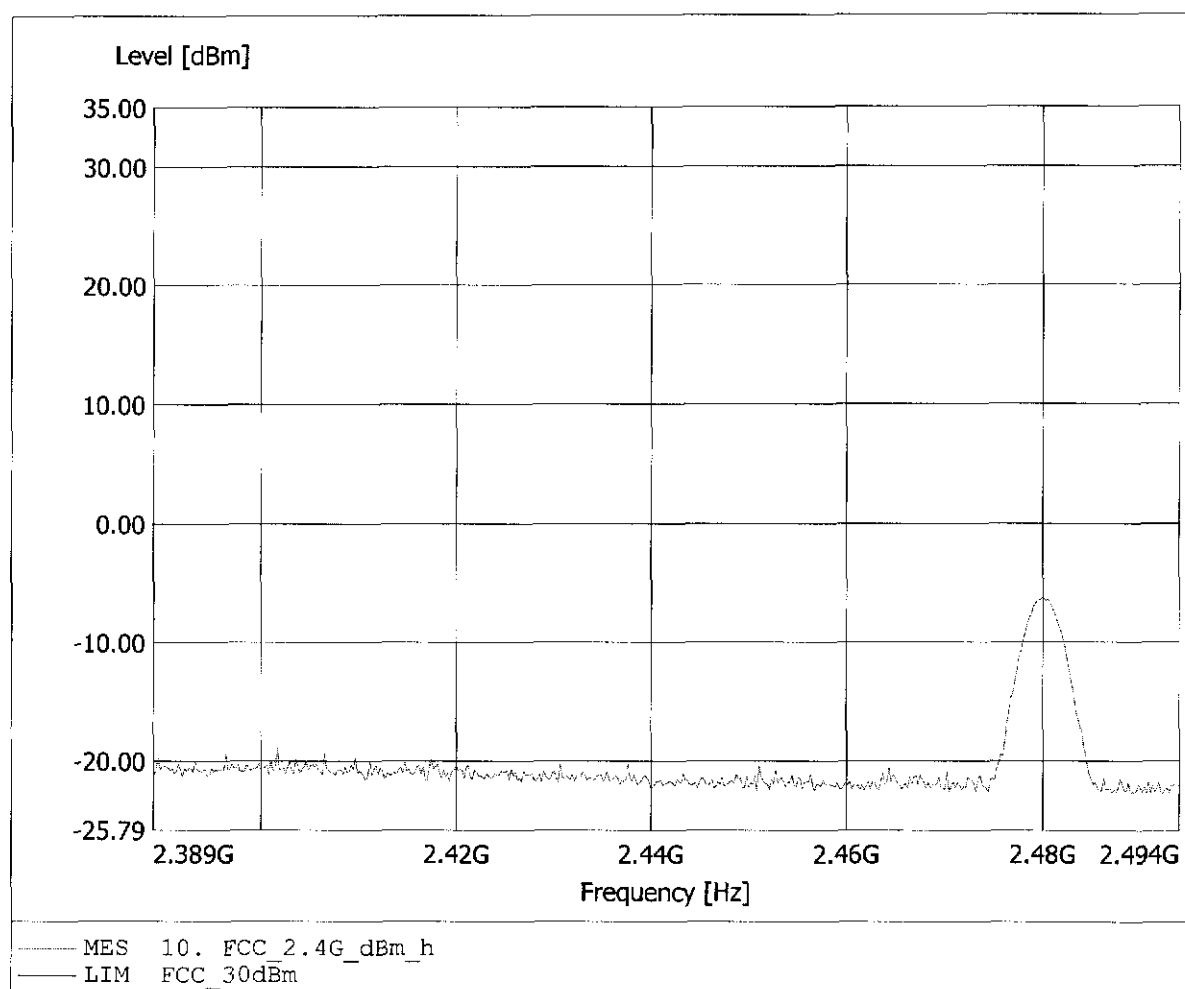


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -0.96dBm, RBW: 5MHz

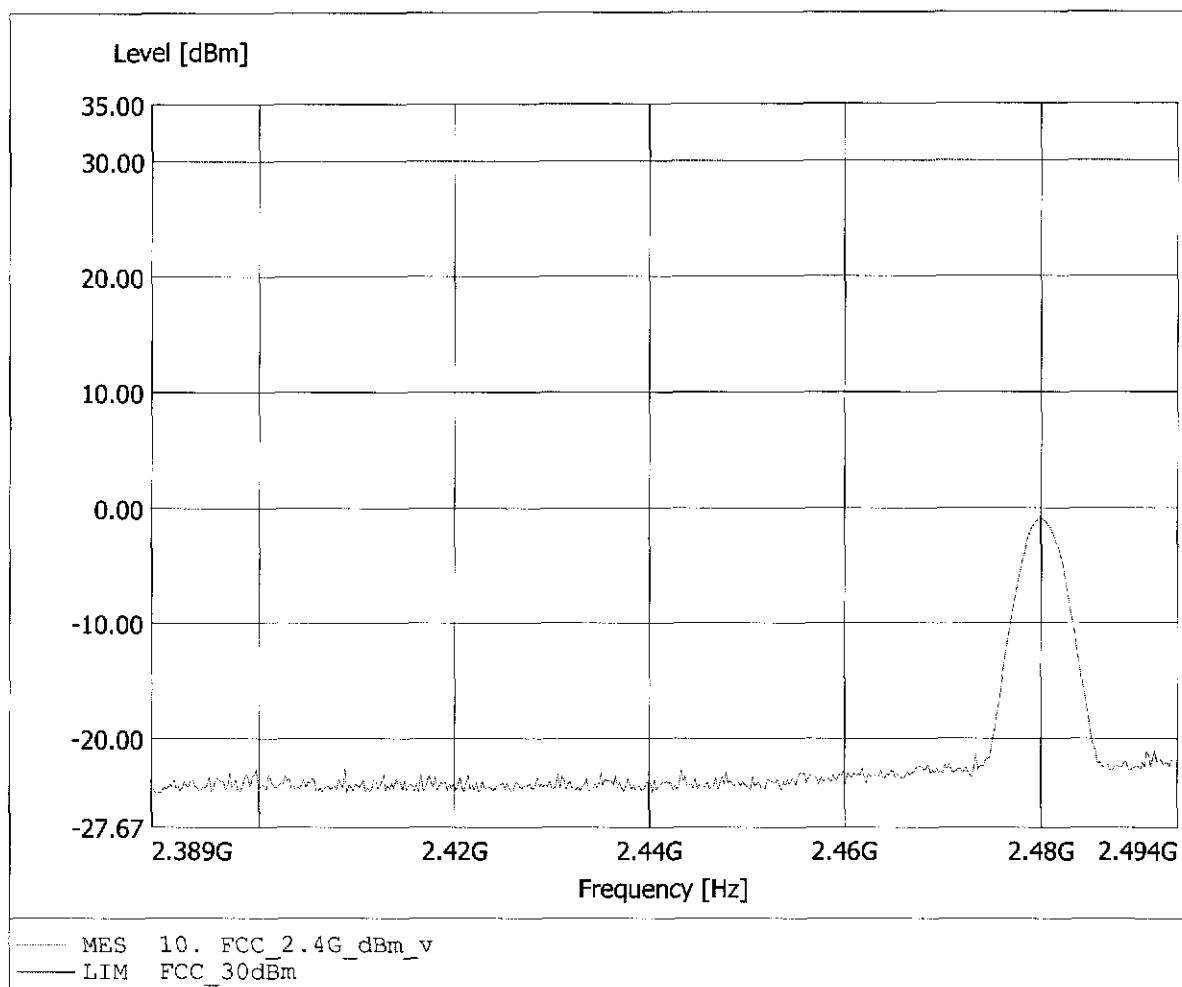


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (charging mode: 120 V -15% AC)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -5.62dBm, RBW: 5MHz

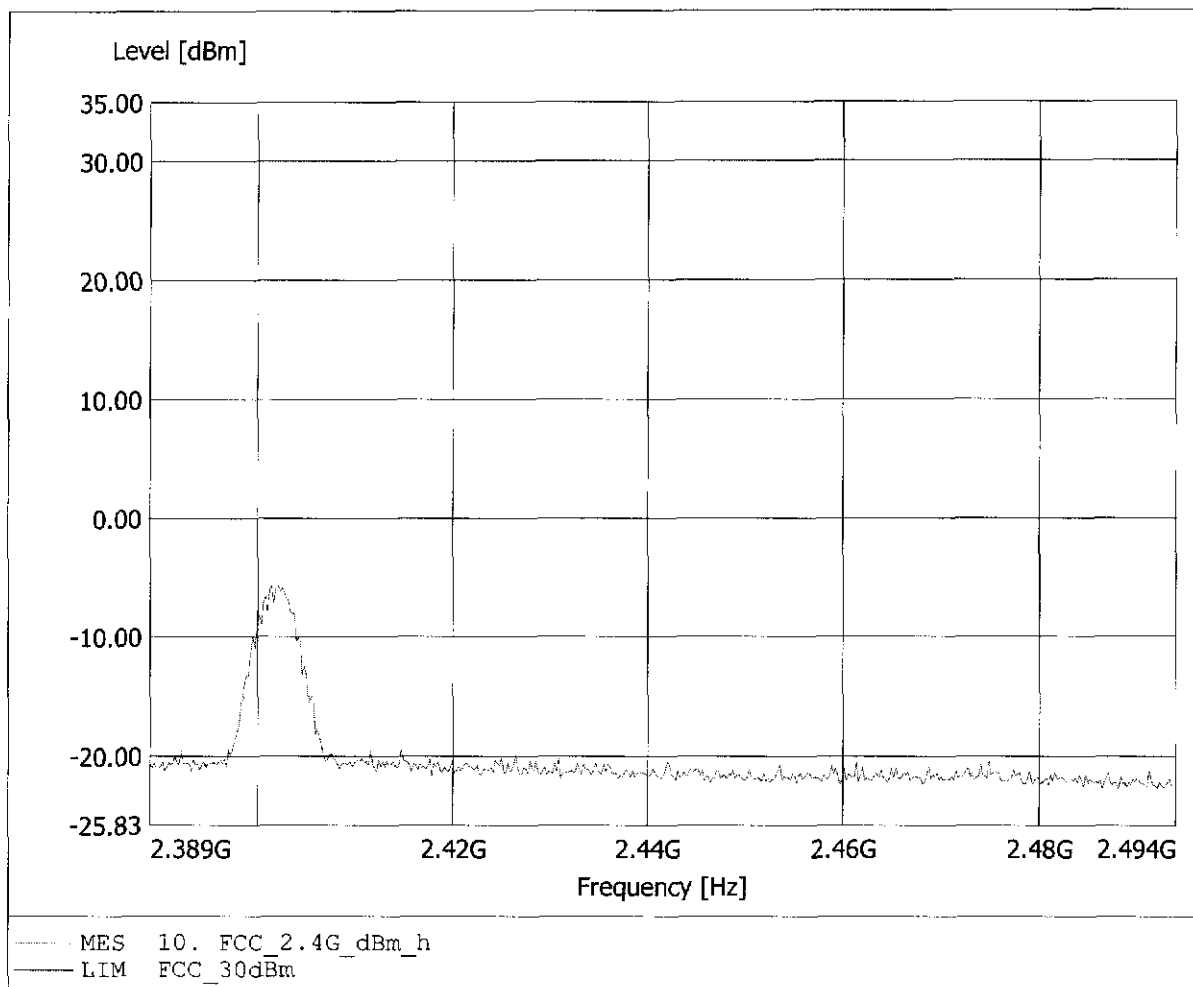


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (charging mode: 120 V -15% AC)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -1.83dBm, RBW: 5MHz

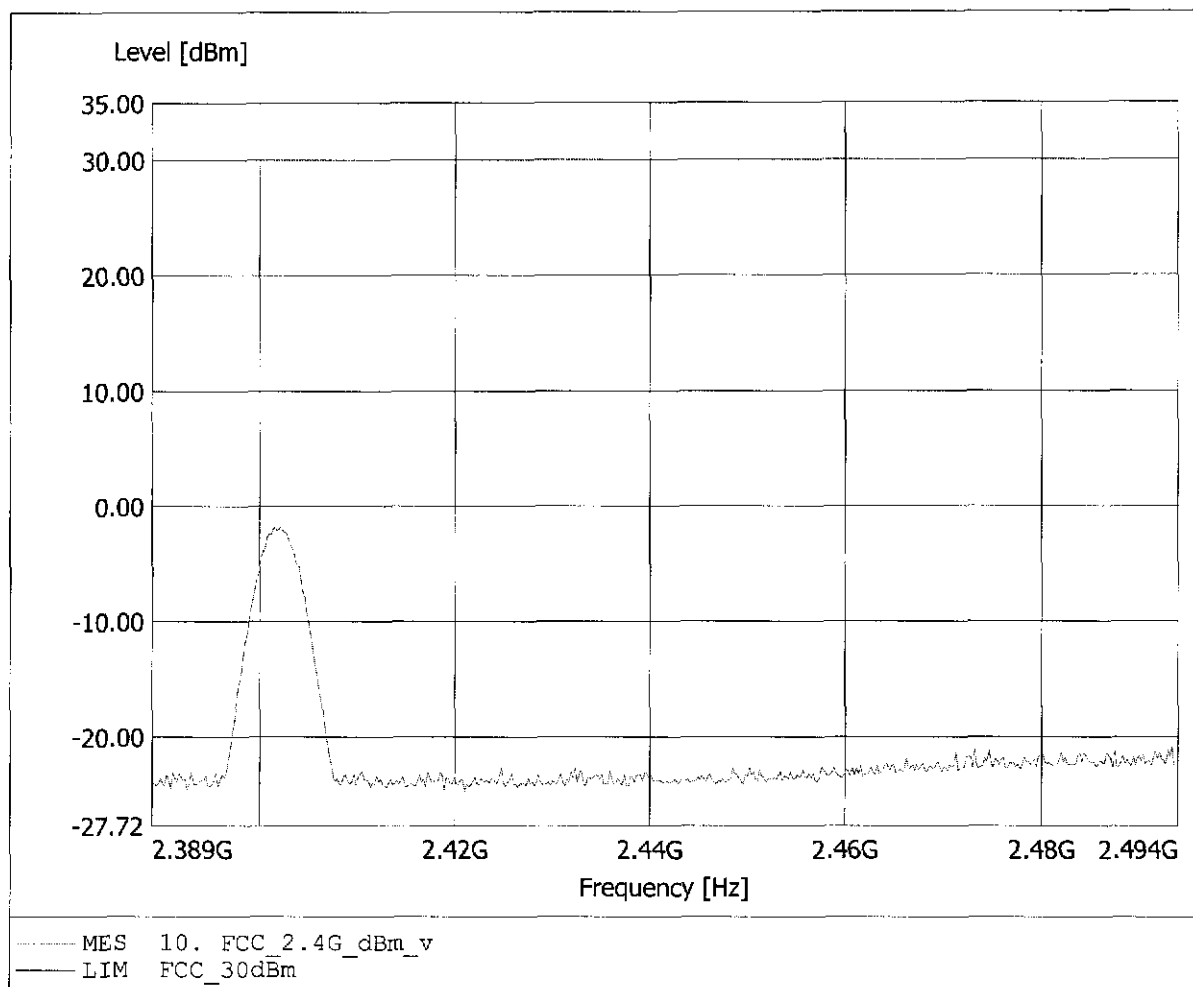


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (charging mode: 120 V -15% AC)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -4.44dBm, RBW: 5MHz

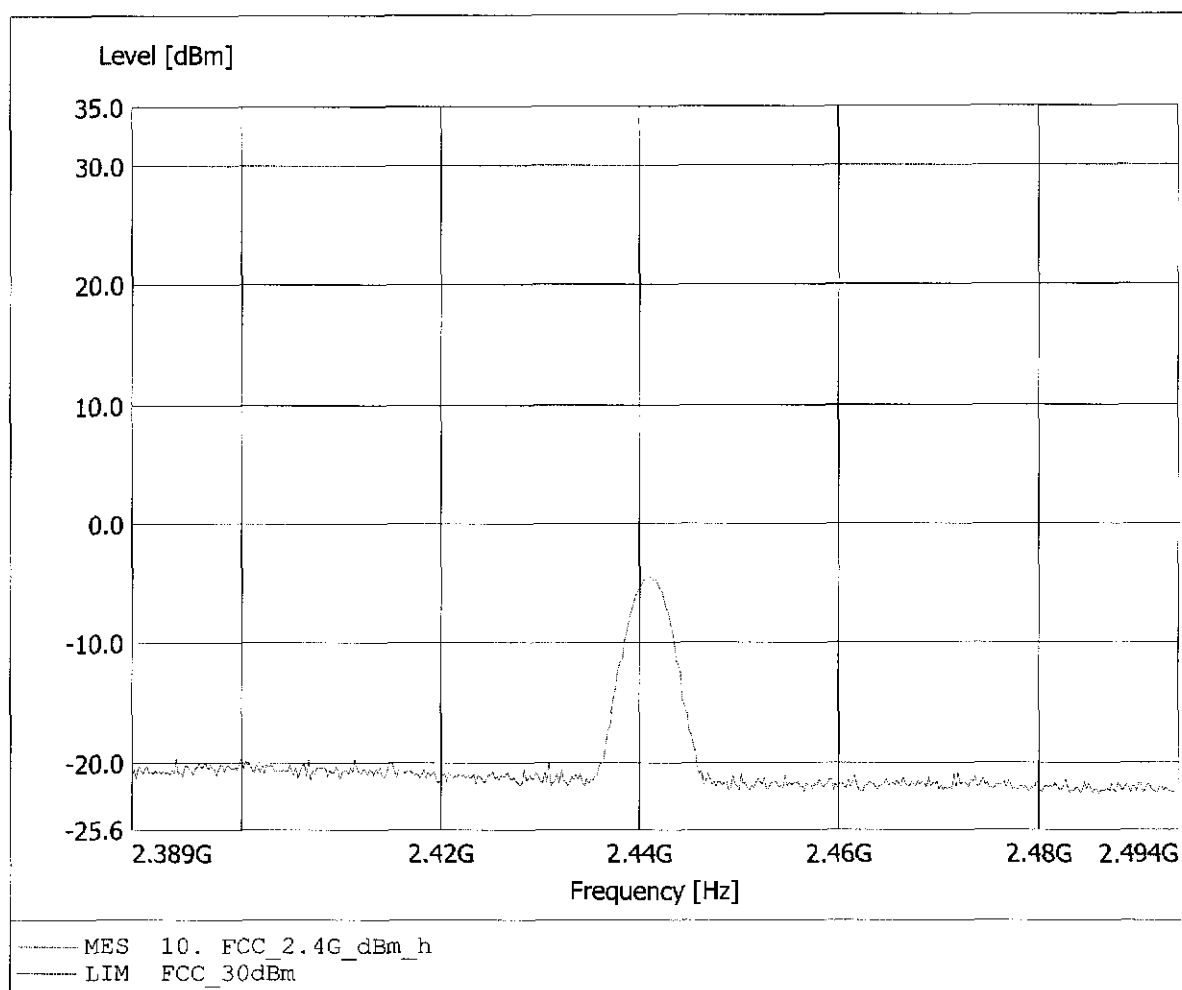


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (charging mode: 120 V -15% AC)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -2.57dBm, RBW: 5MHz

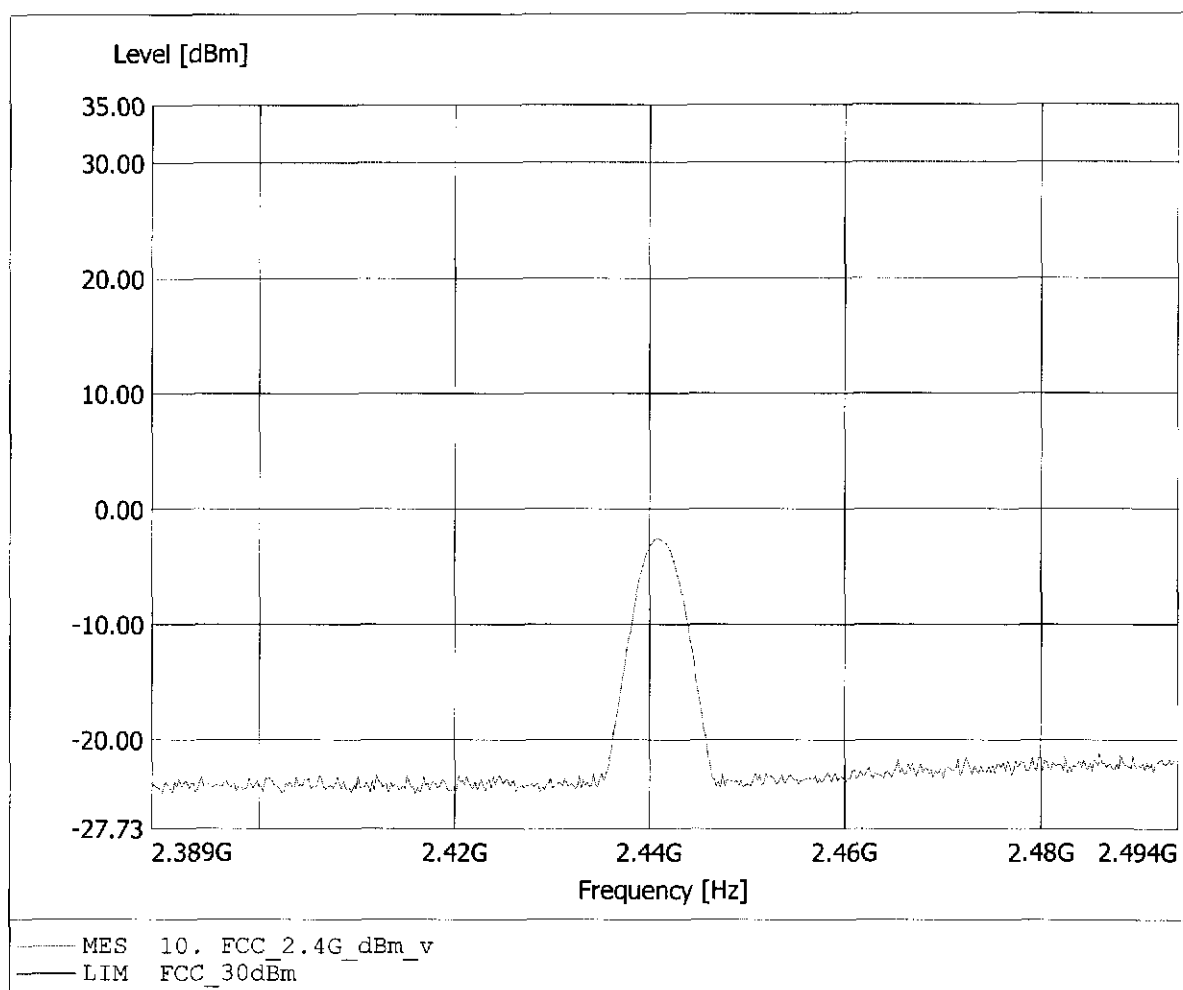


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (charging mode: 120 V -15% AC)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -5.54dBm, RBW: 5MHz

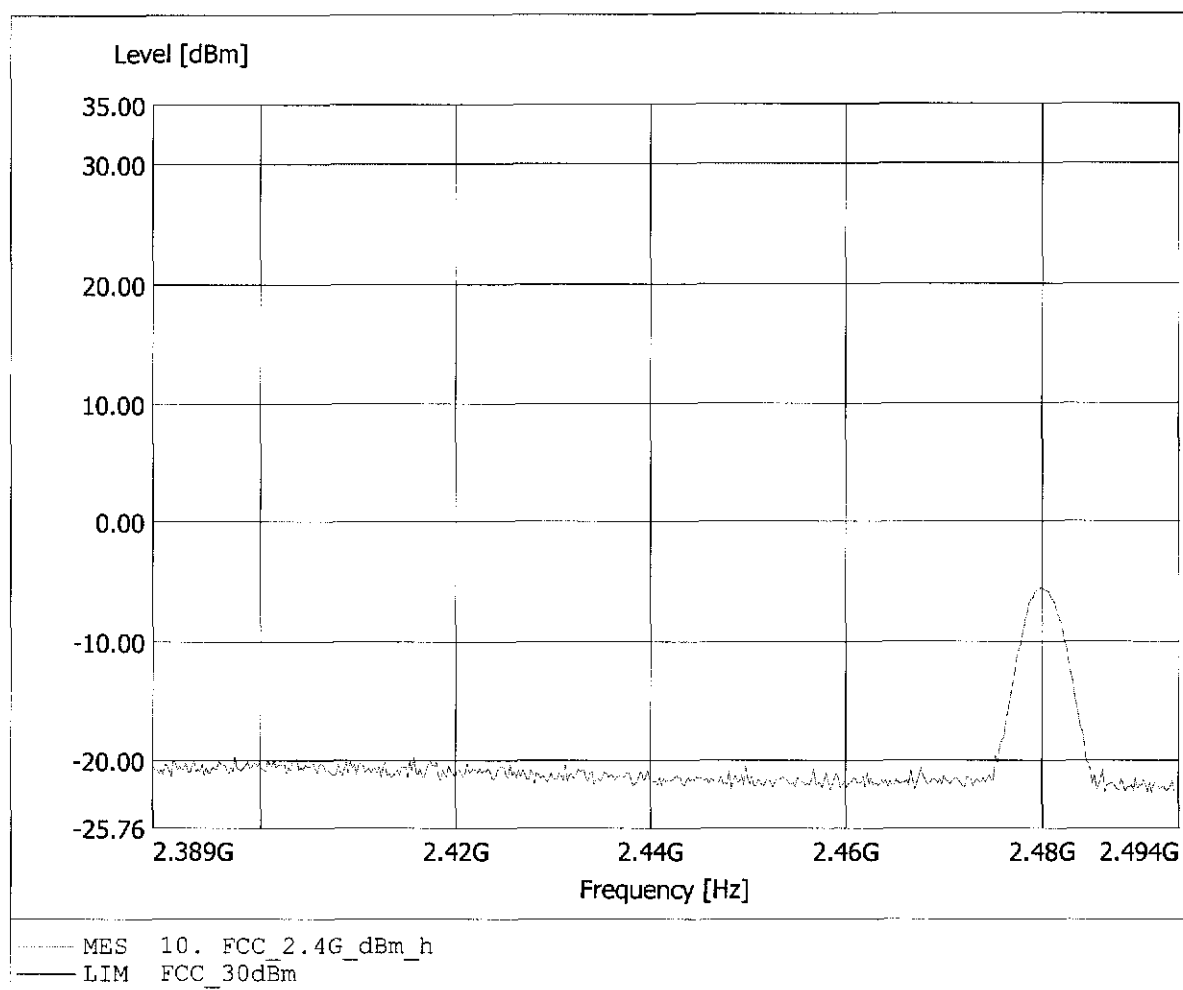


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (charging mode: 120 V -15% AC)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -0.74dBm, RBW: 5MHz

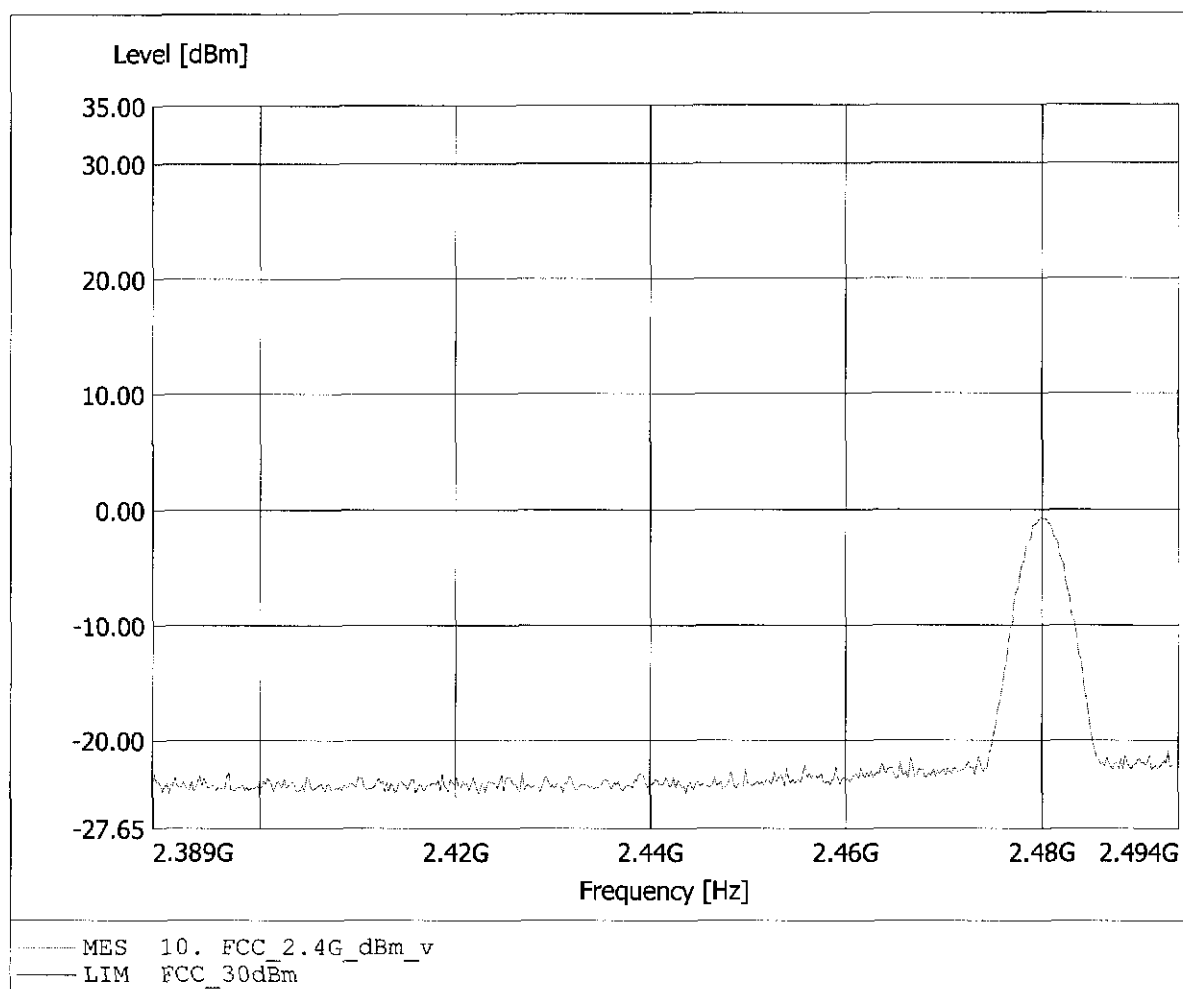


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (charging mode: 120 V +15% AC)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -5.48dBm, RBW: 5MHz

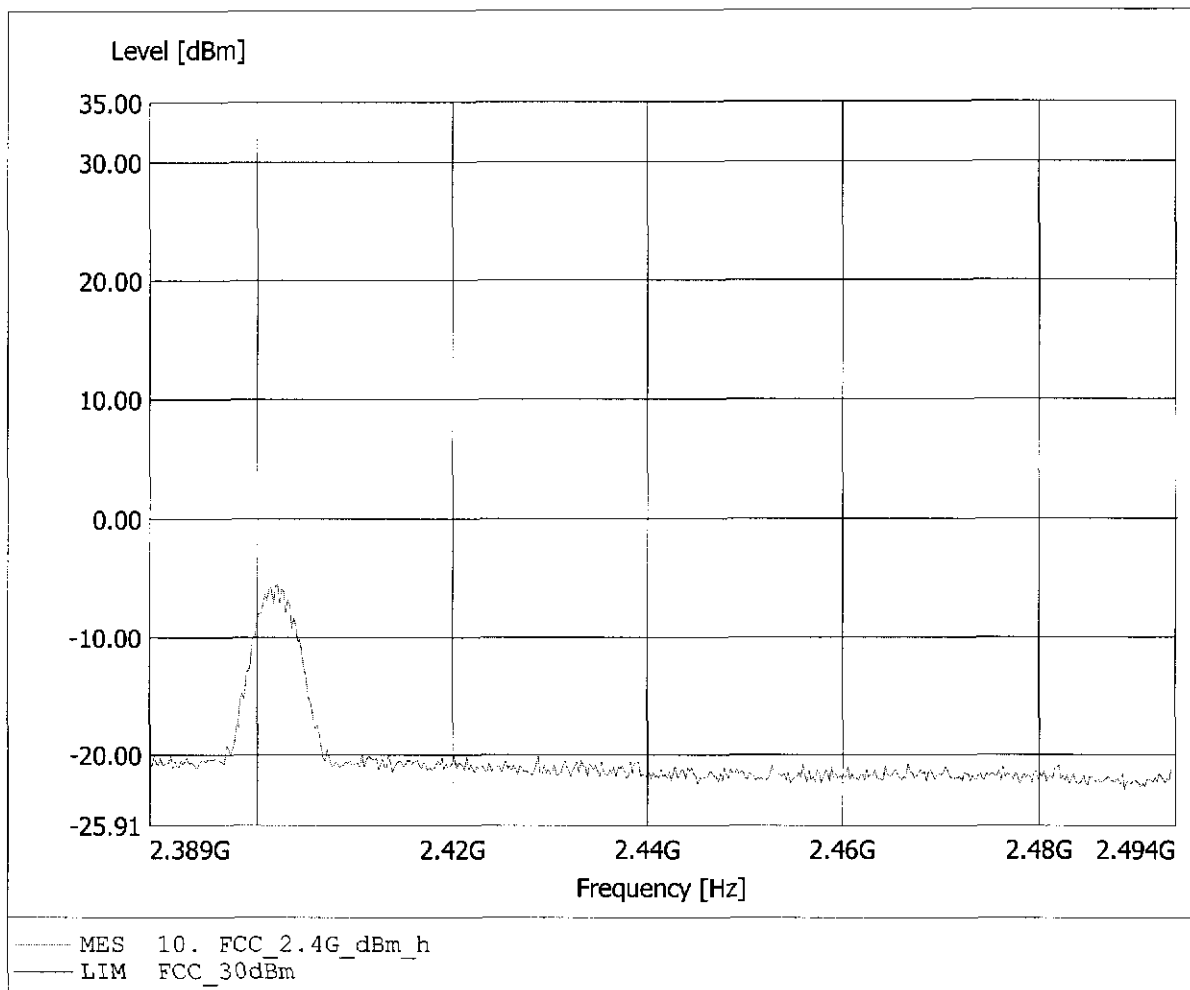


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (charging mode: 120 V +15% AC)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -1.98dBm, RBW: 5MHz

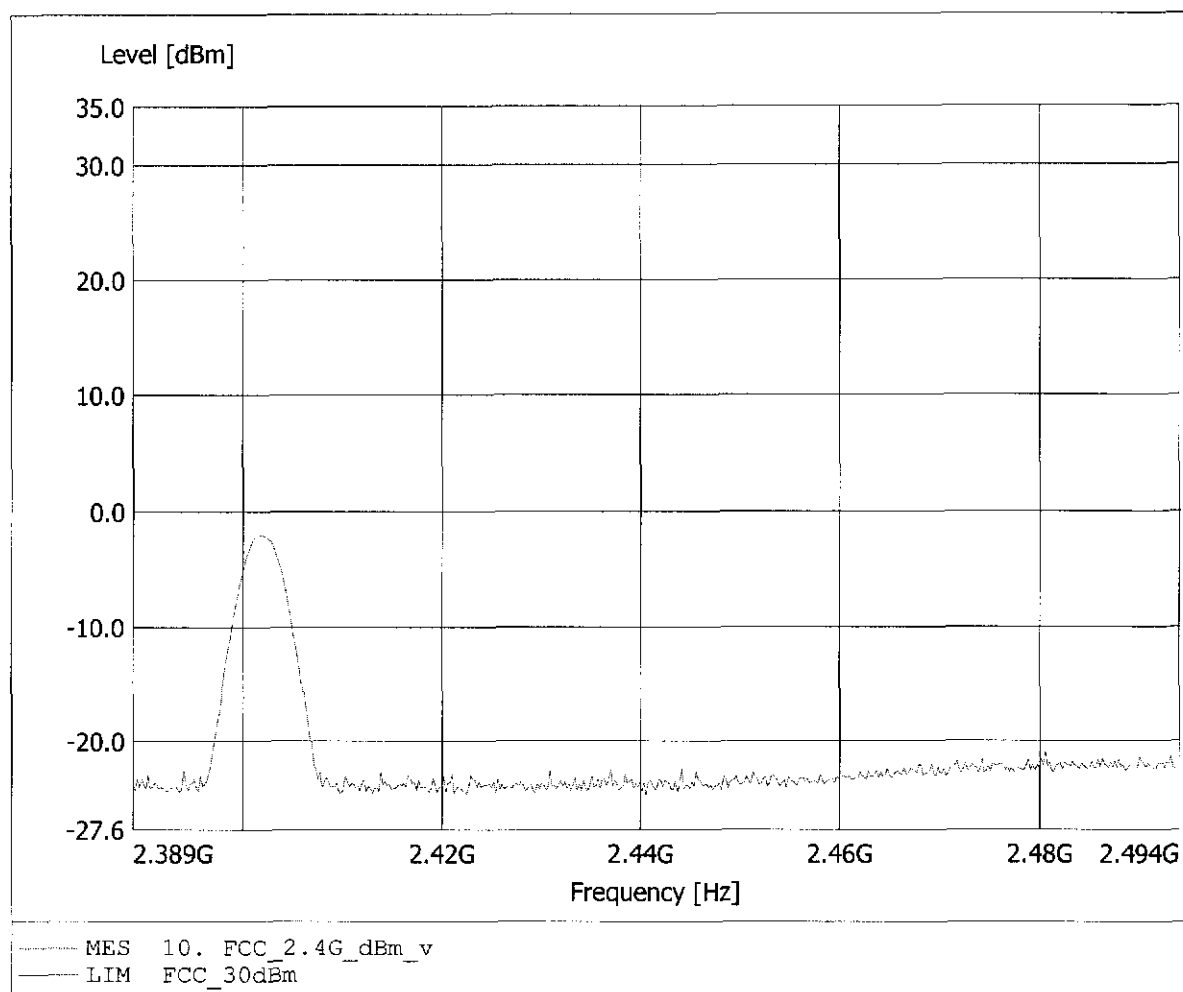


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (charging mode: 120 V +15% AC)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -4.43dBm, RBW: 5MHz

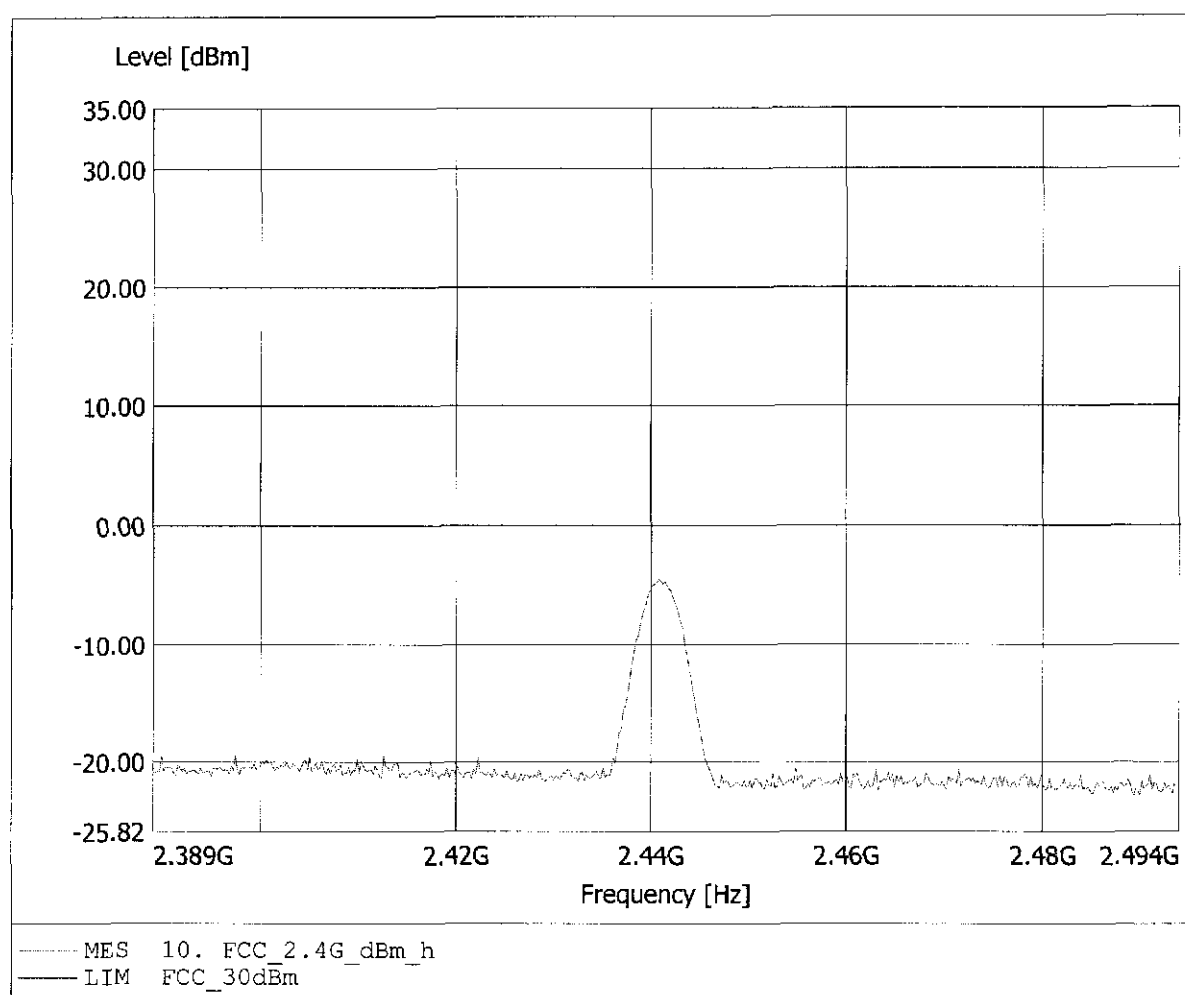


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (charging mode: 120 V +15% AC)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -2.66dBm, RBW: 5MHz

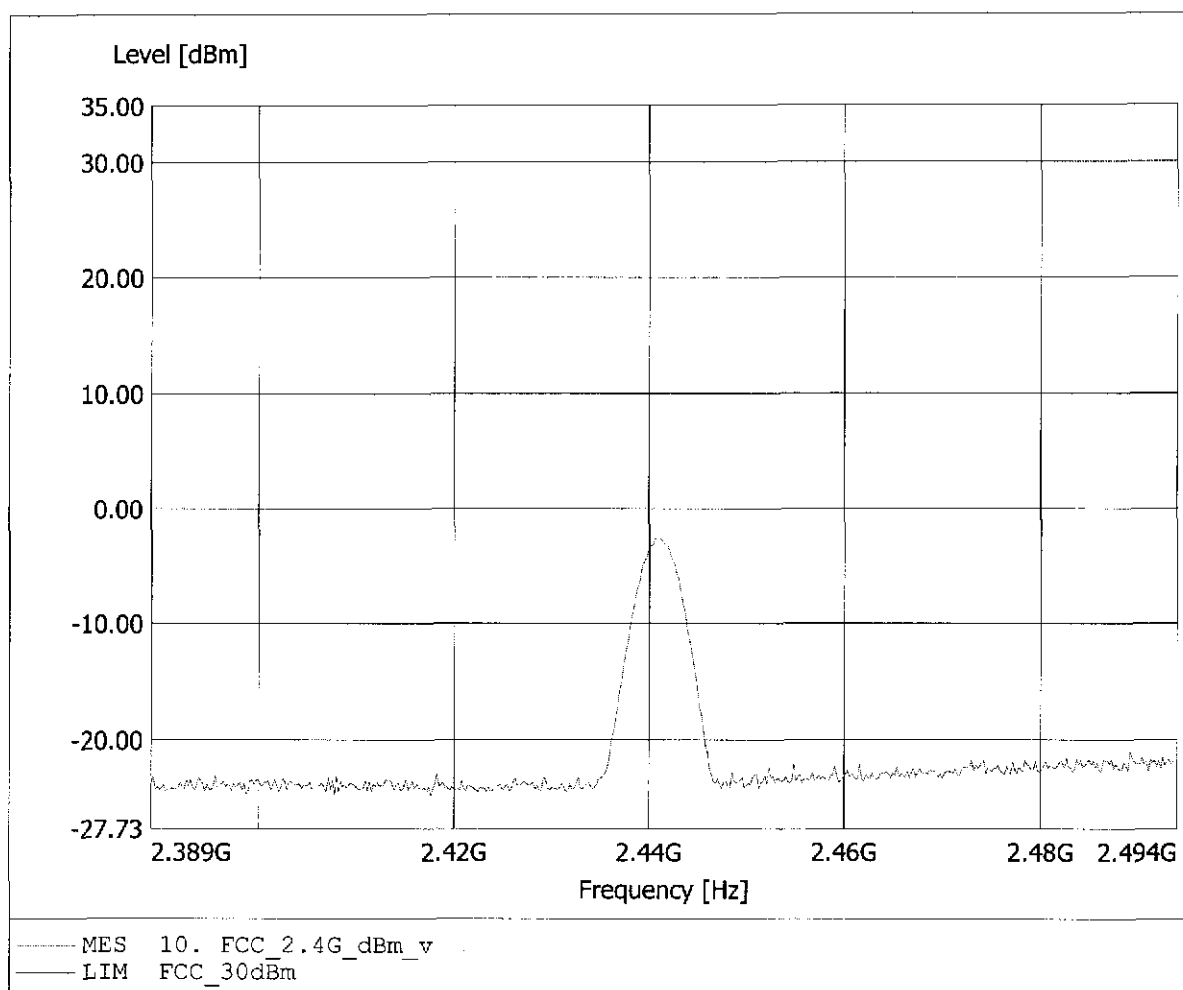


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (charging mode: 120 V +15% AC)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -5.66dBm, RBW: 5MHz

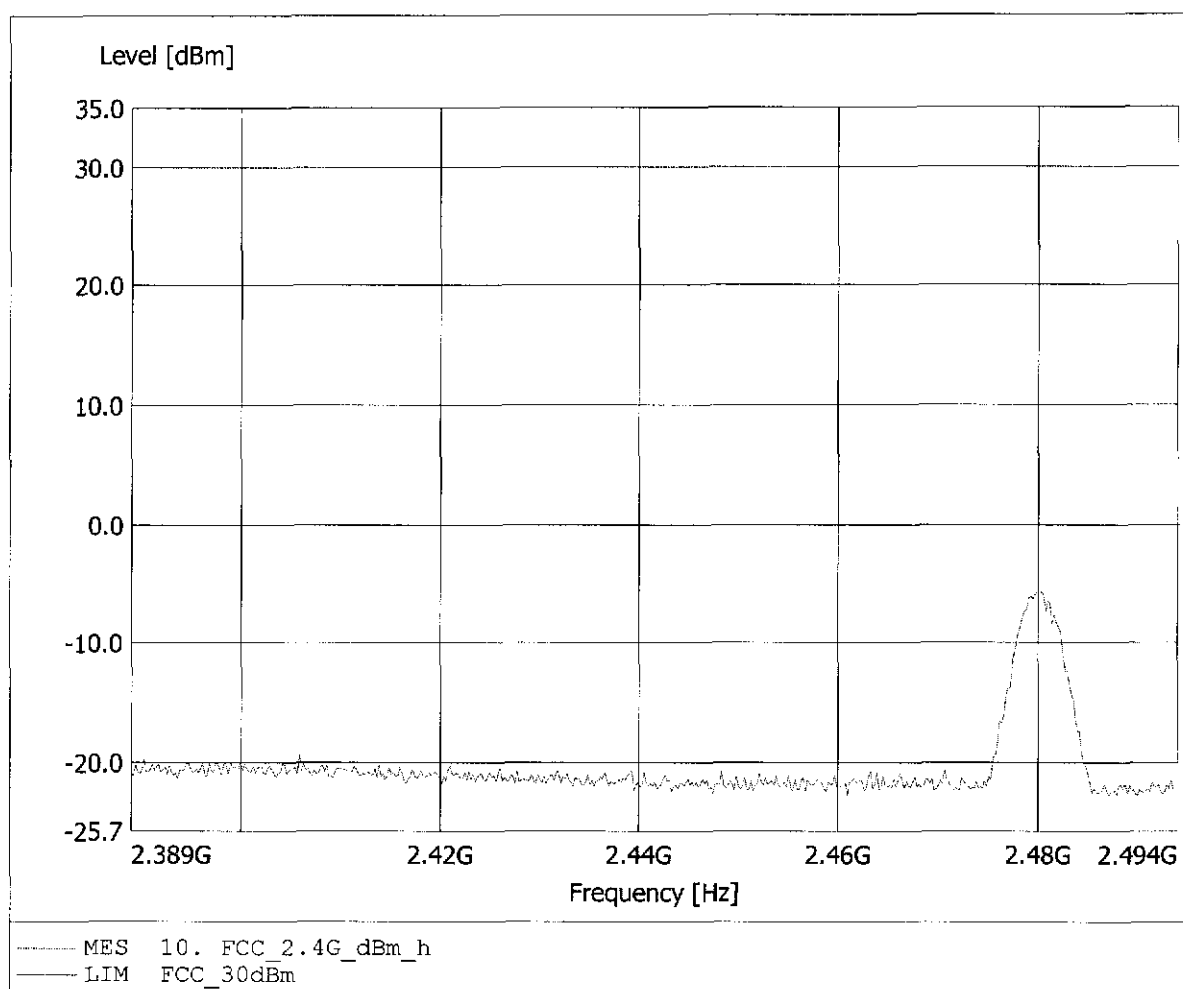

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (charging mode: 120 V +15% AC)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -0.71dBm, RBW: 5MHz

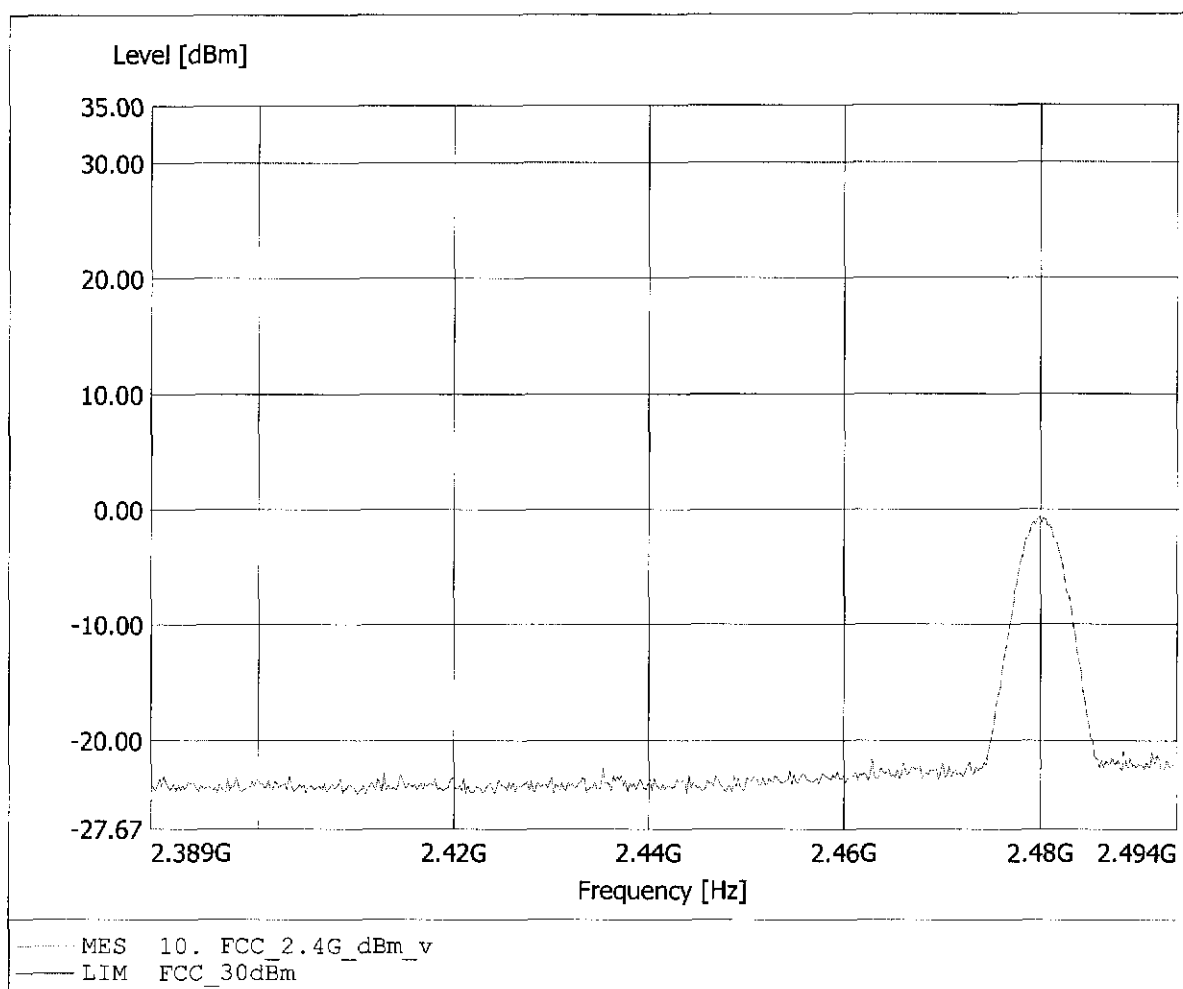


Appendix C

Spurious Emissions radiated - Transmitter operating


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Emax: 92.15dBuV/m, RBW: 100kHz

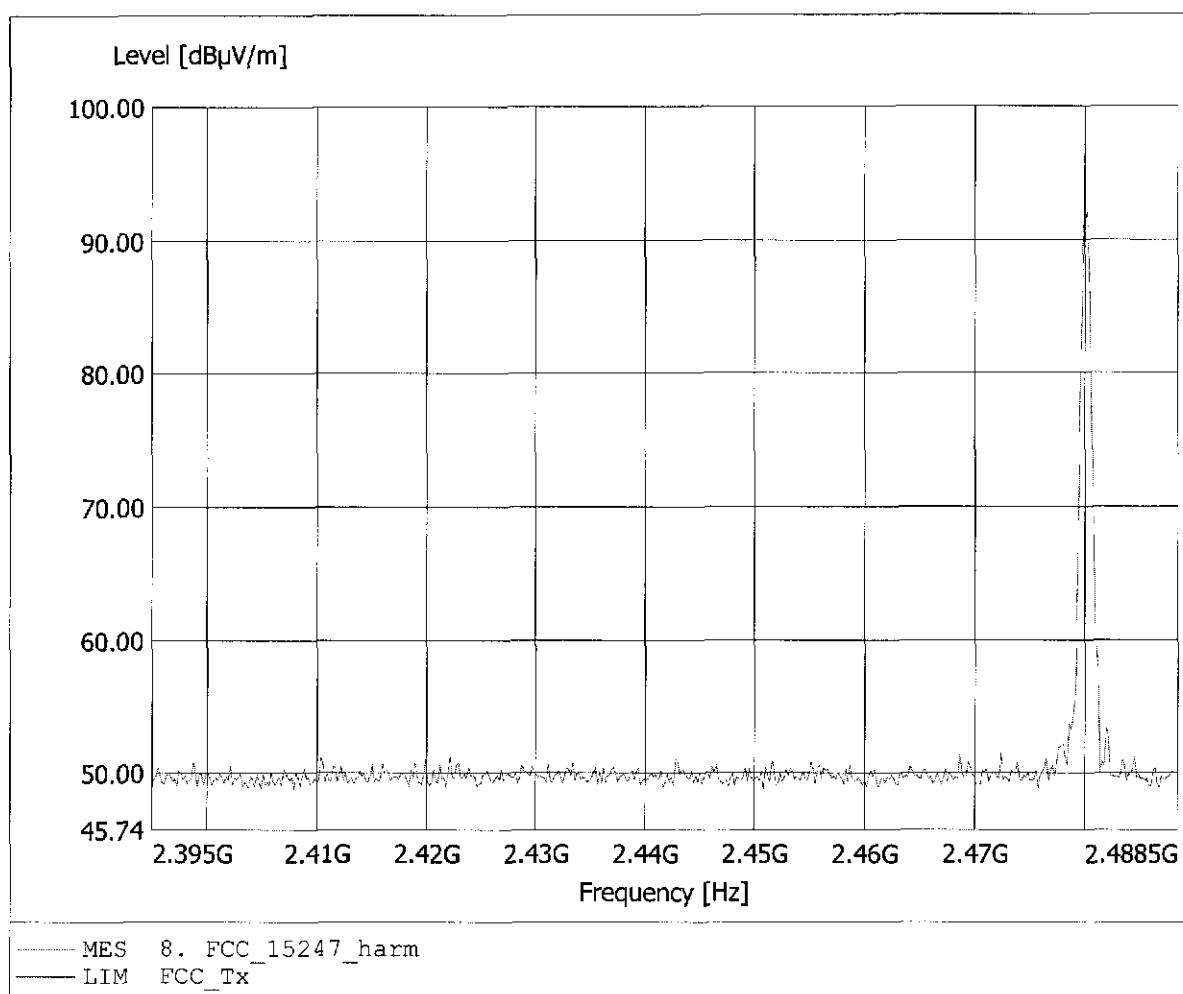


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 197.275MHz, Emax: 32.99dBµV/m, RBW: 100kHz

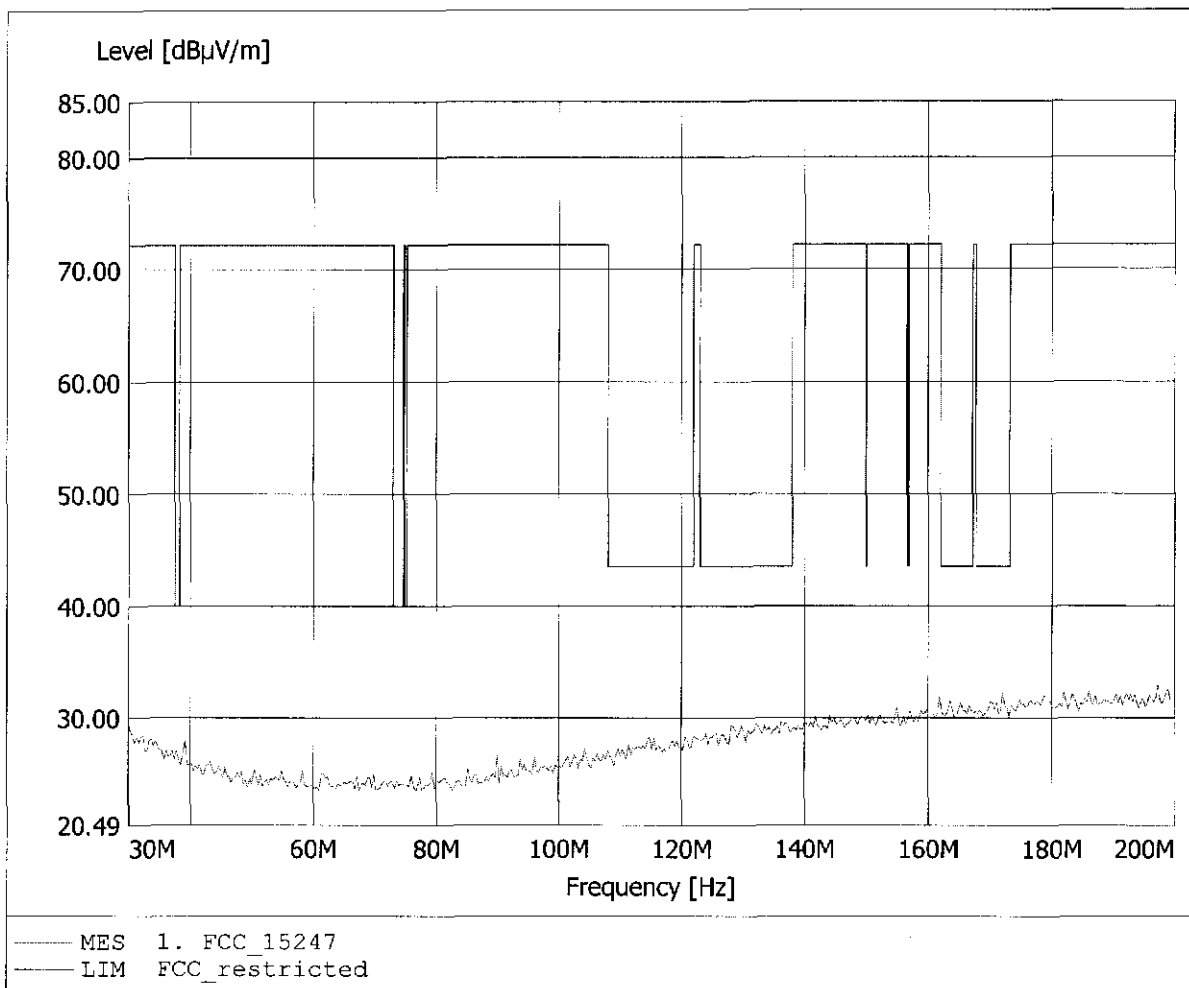


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 30.000MHz, Emax: 35.35dBµV/m, RBW: 100kHz

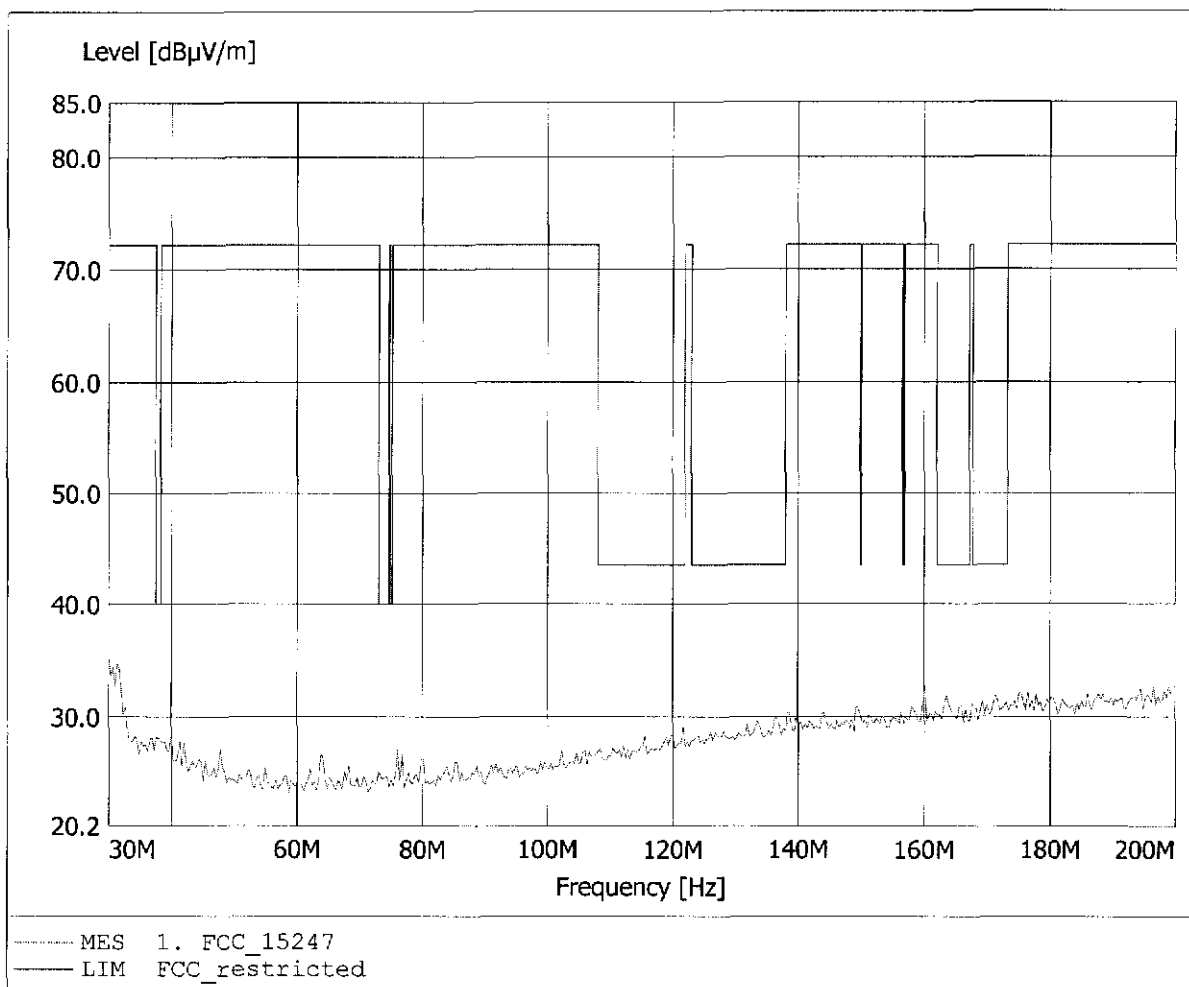


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 238.477MHz, Emax: 27.67dBµV/m, RBW: 100kHz

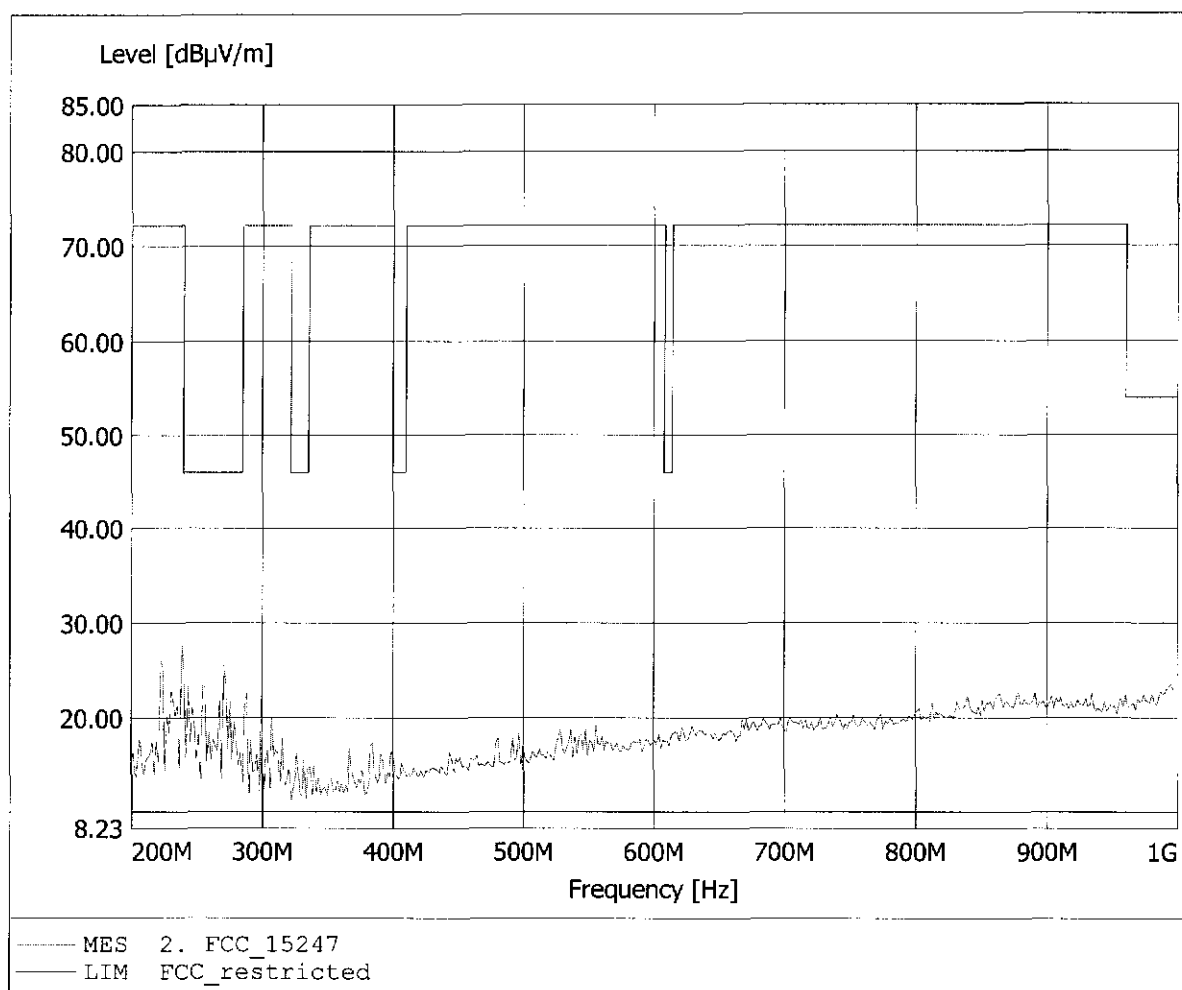


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 206.413MHz, Emax: 24.37dBµV/m, RBW: 100kHz

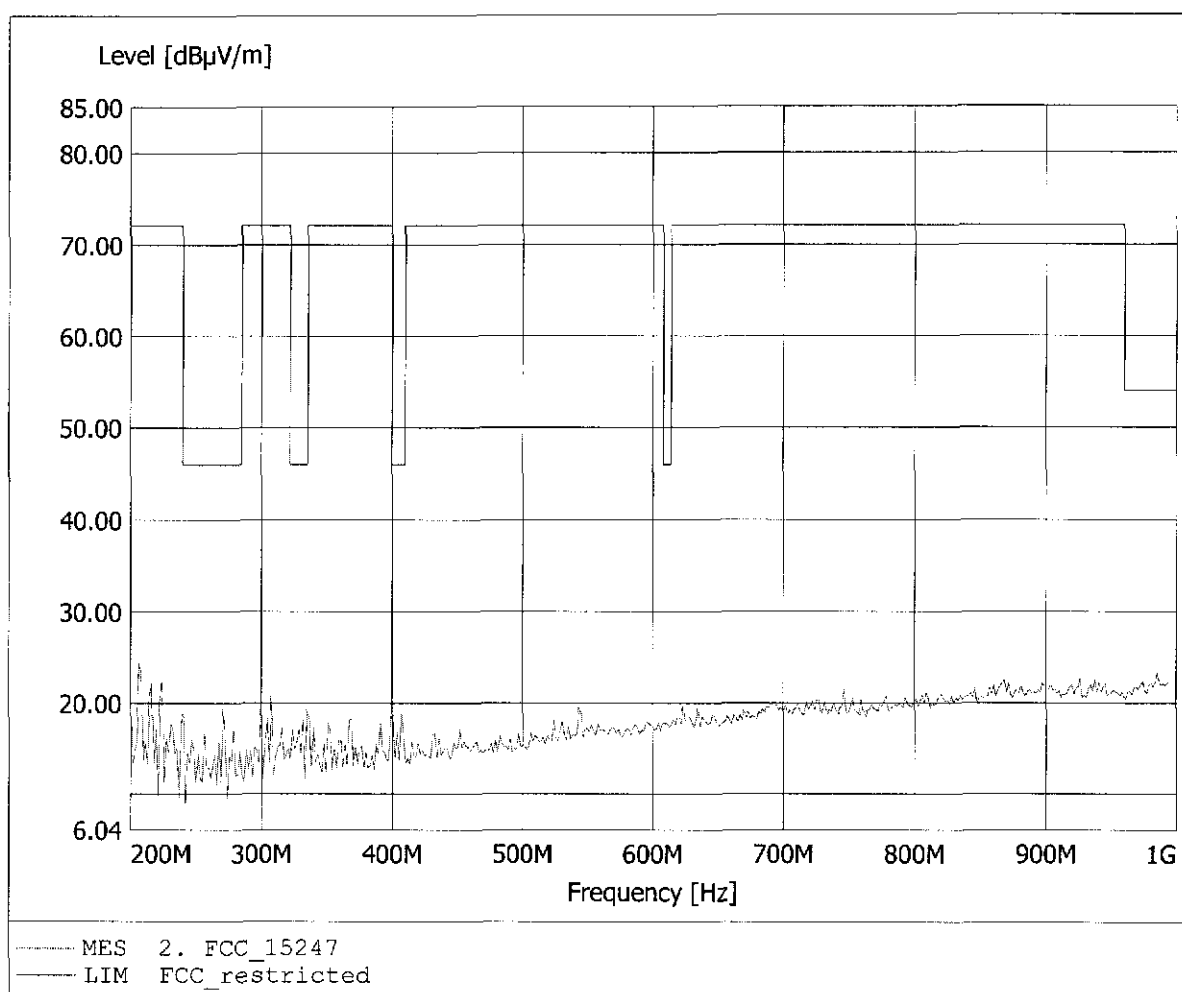


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.603GHz, Emax: 44.88dBuV/m, RBW: 1MHz

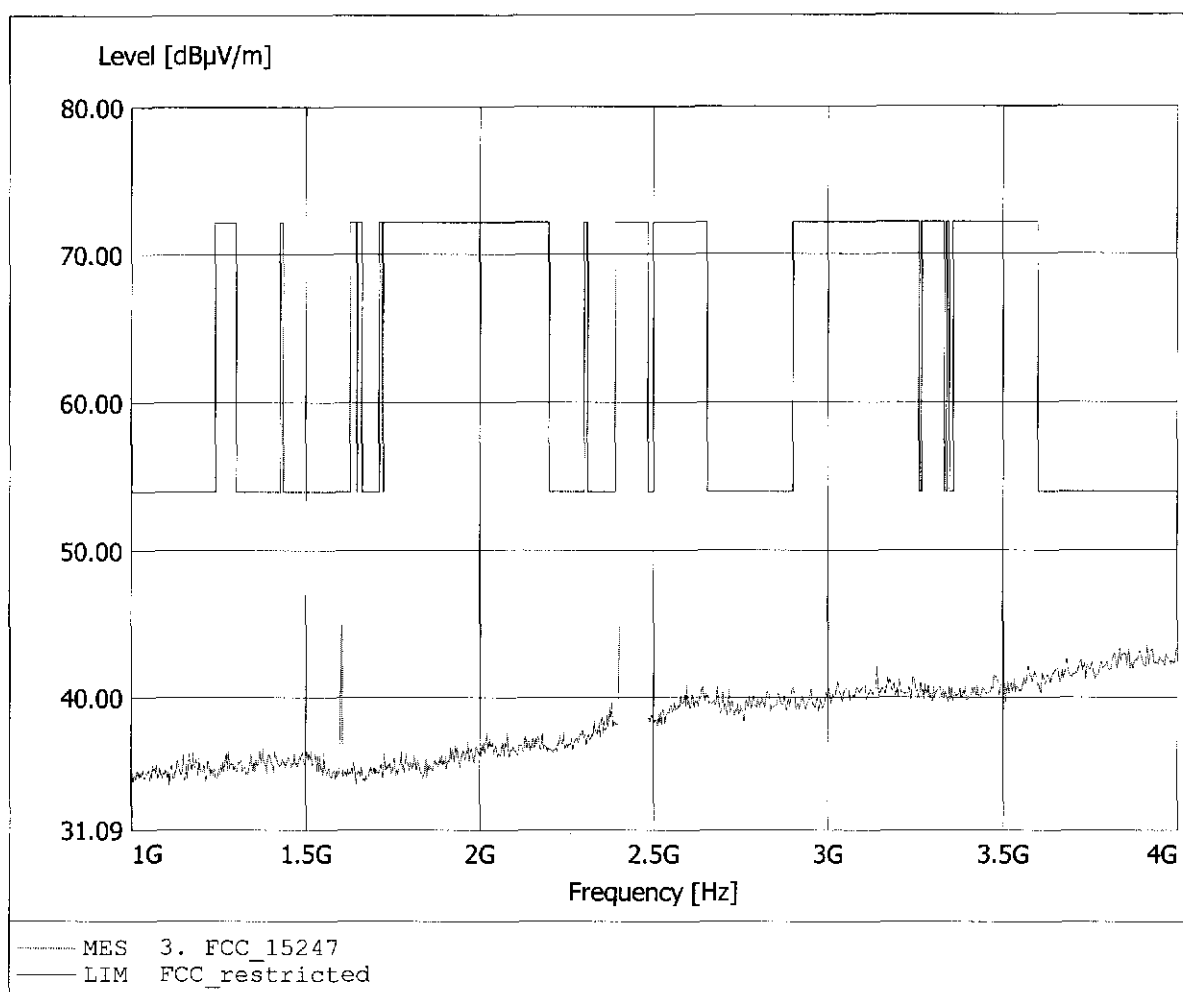


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 49.15dBuV/m, RBW: 1MHz

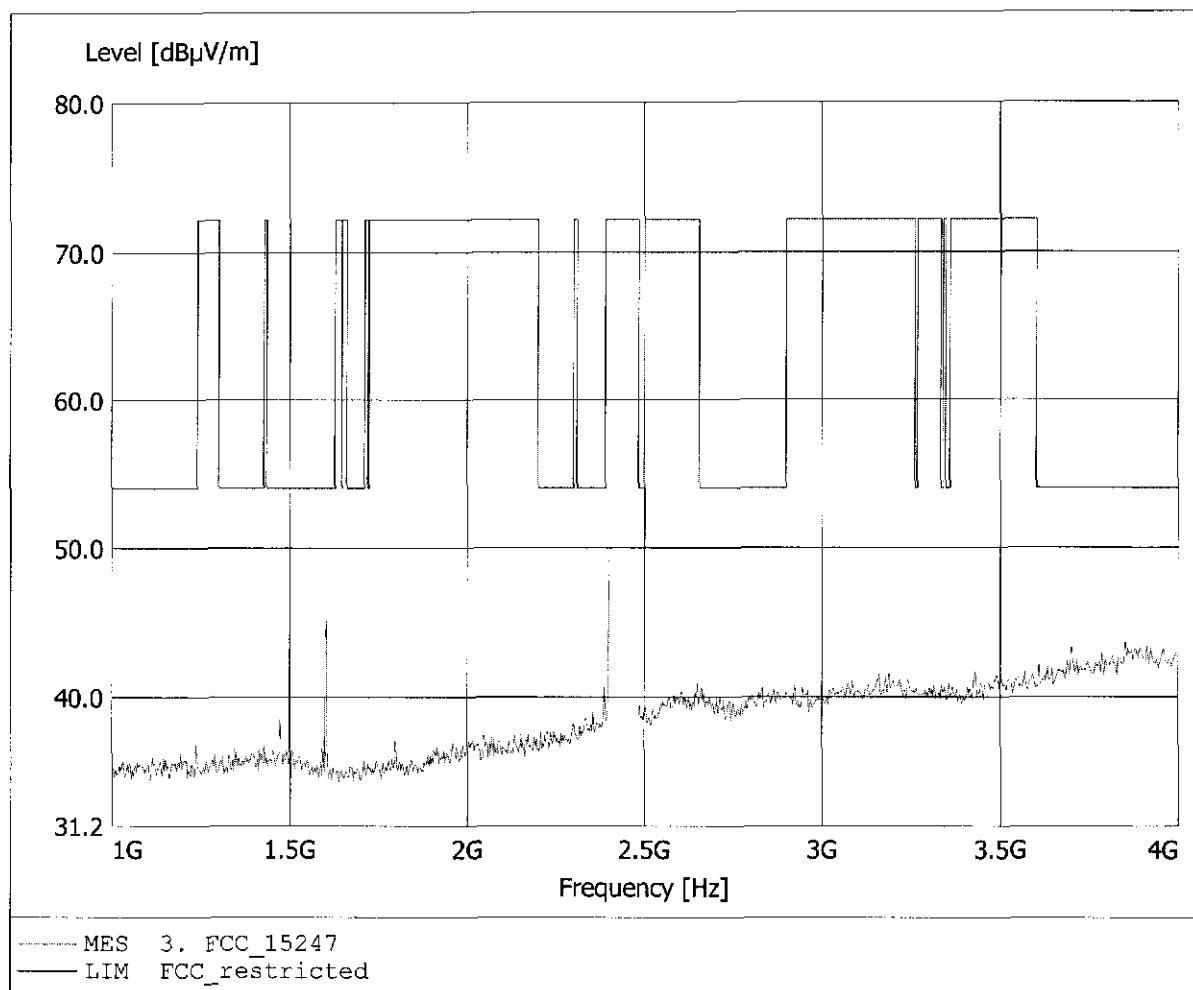


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.904GHz, Emax: 38.91dBµV/m, RBW: 1MHz

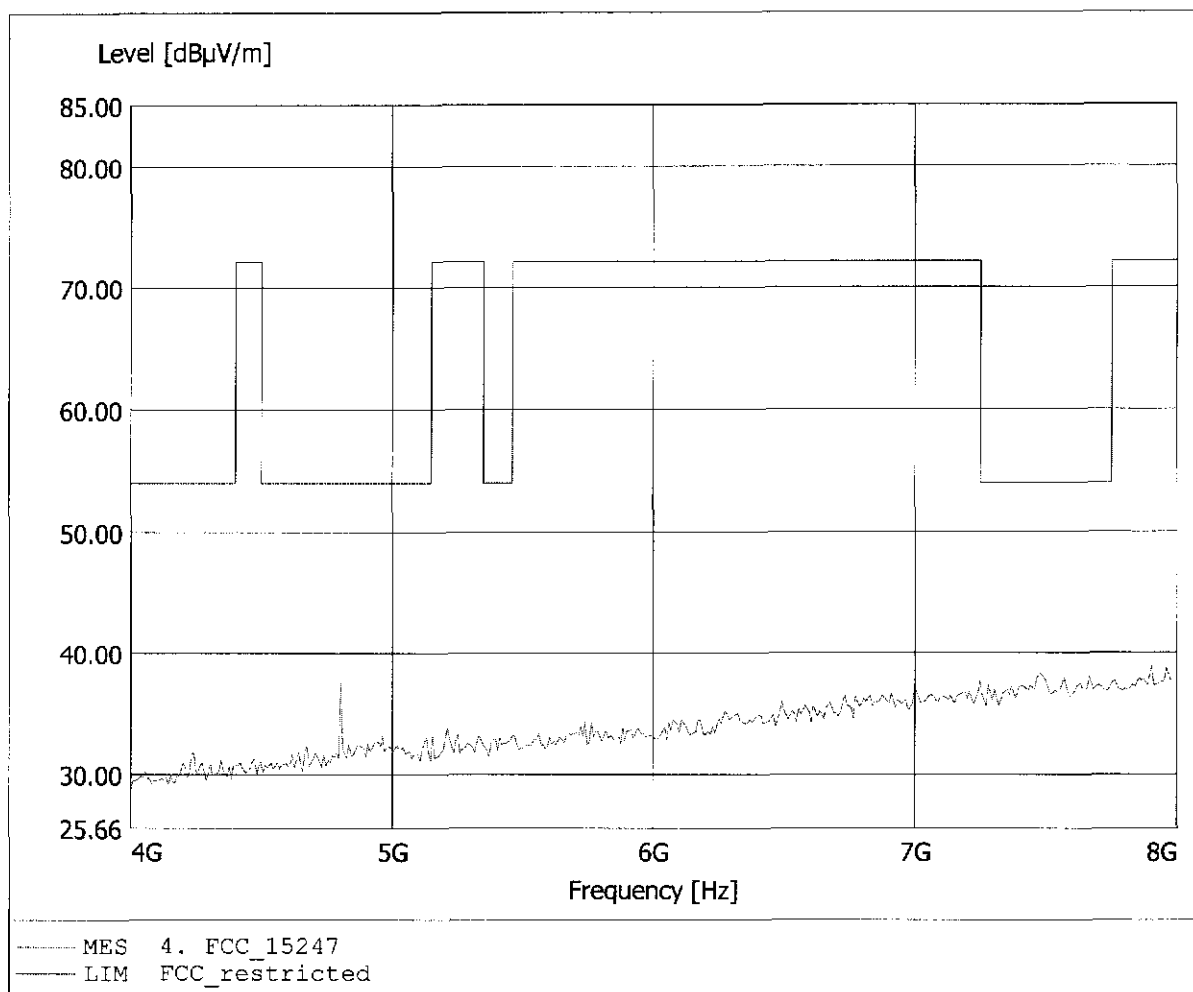


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.960GHz, Emax: 38.18dBµV/m, RBW: 1MHz

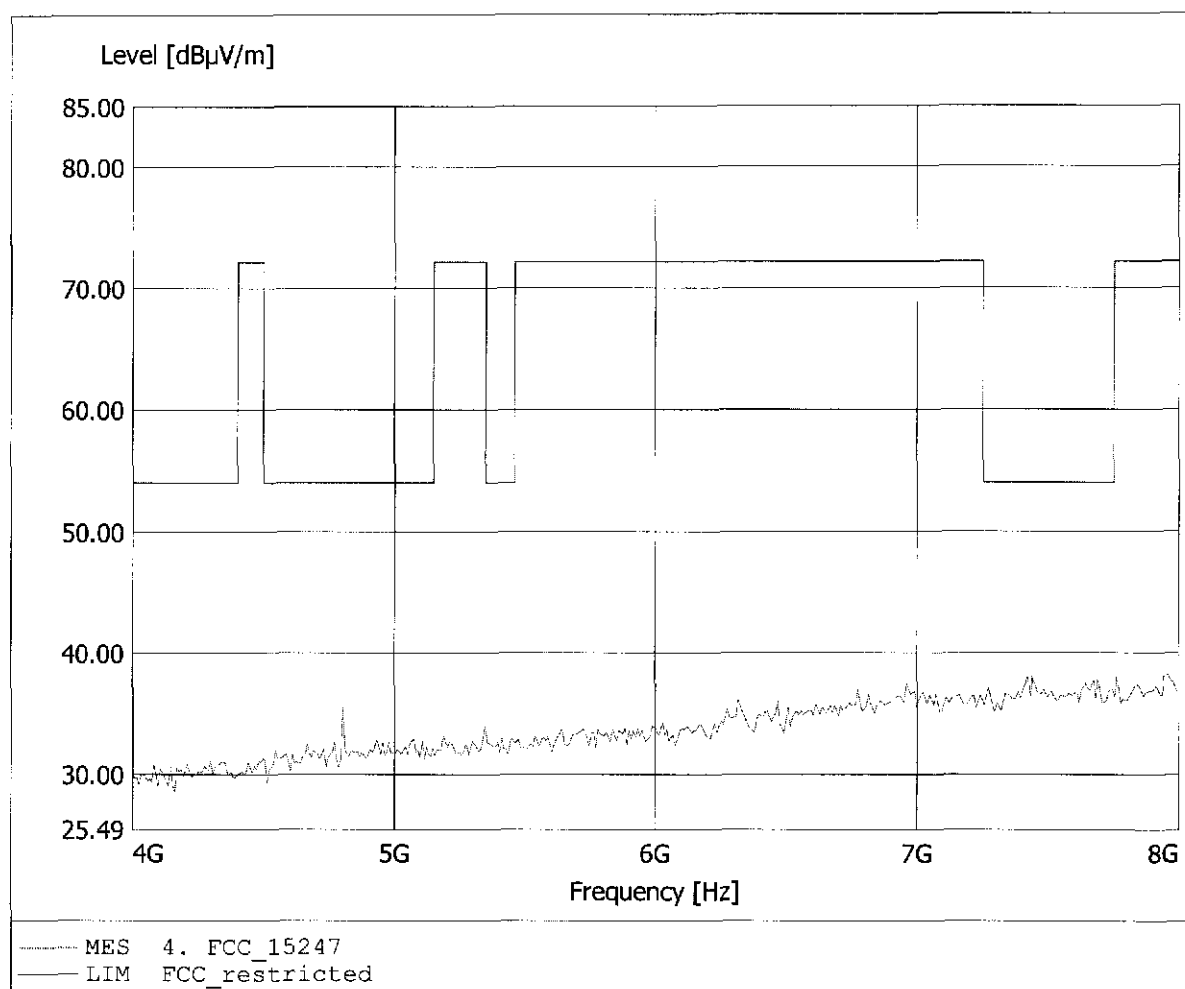


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 10.910GHz, Emax: 42.61dBµV/m, RBW: 1MHz

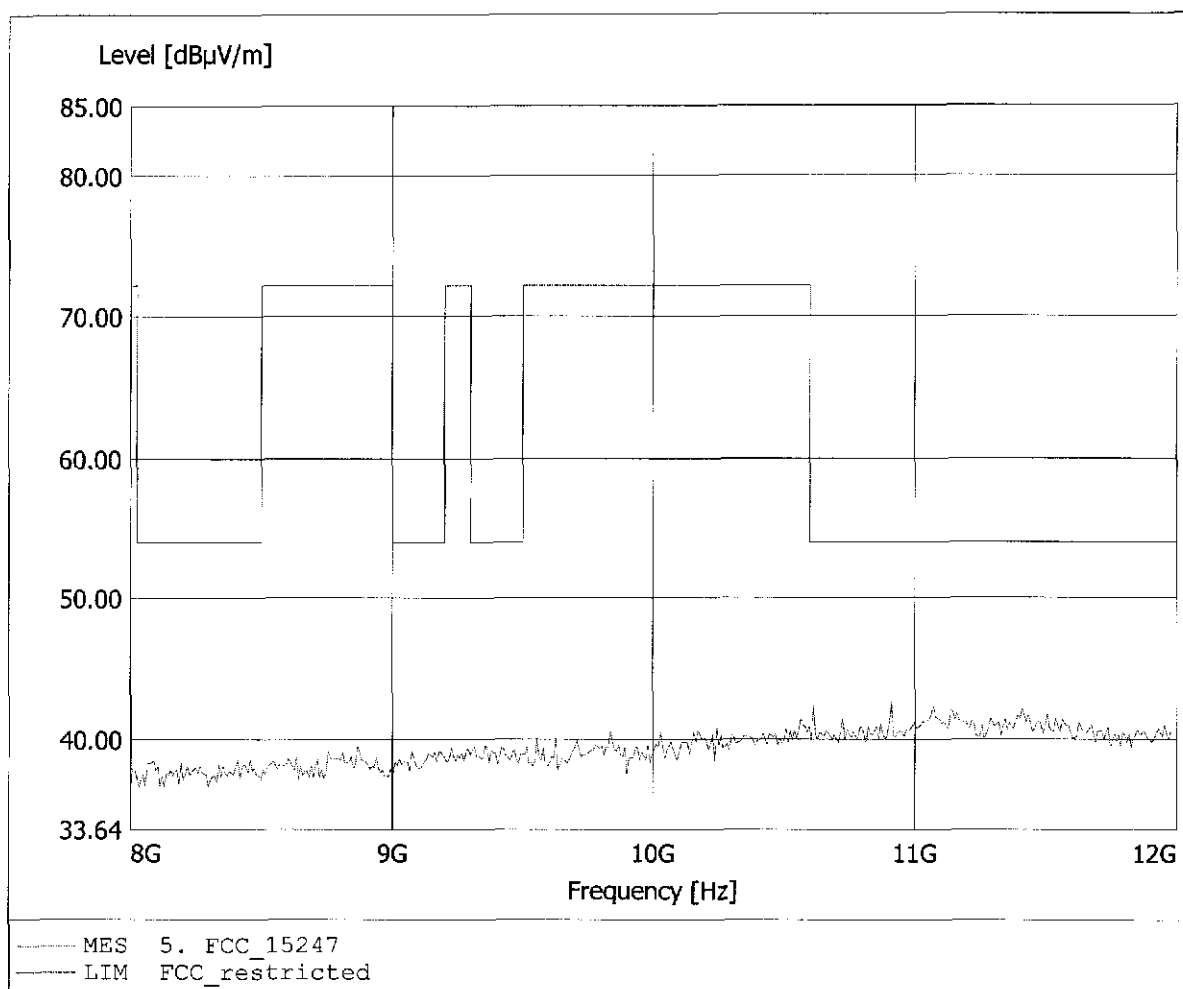


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.078GHz, Emax: 42.47dBµV/m, RBW: 1MHz

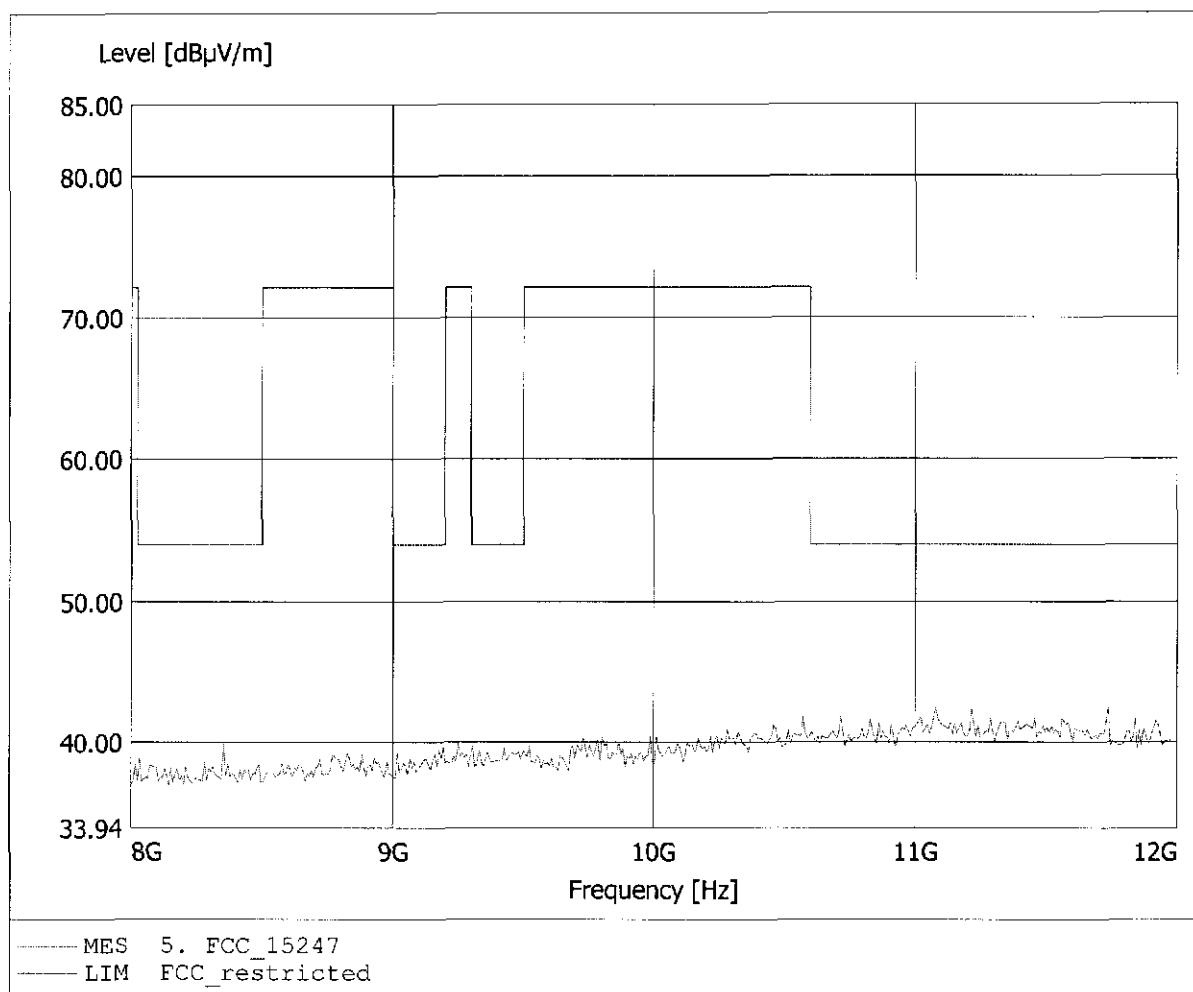


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.866GHz, Emax: 45.10dBµV/m, RBW: 1MHz

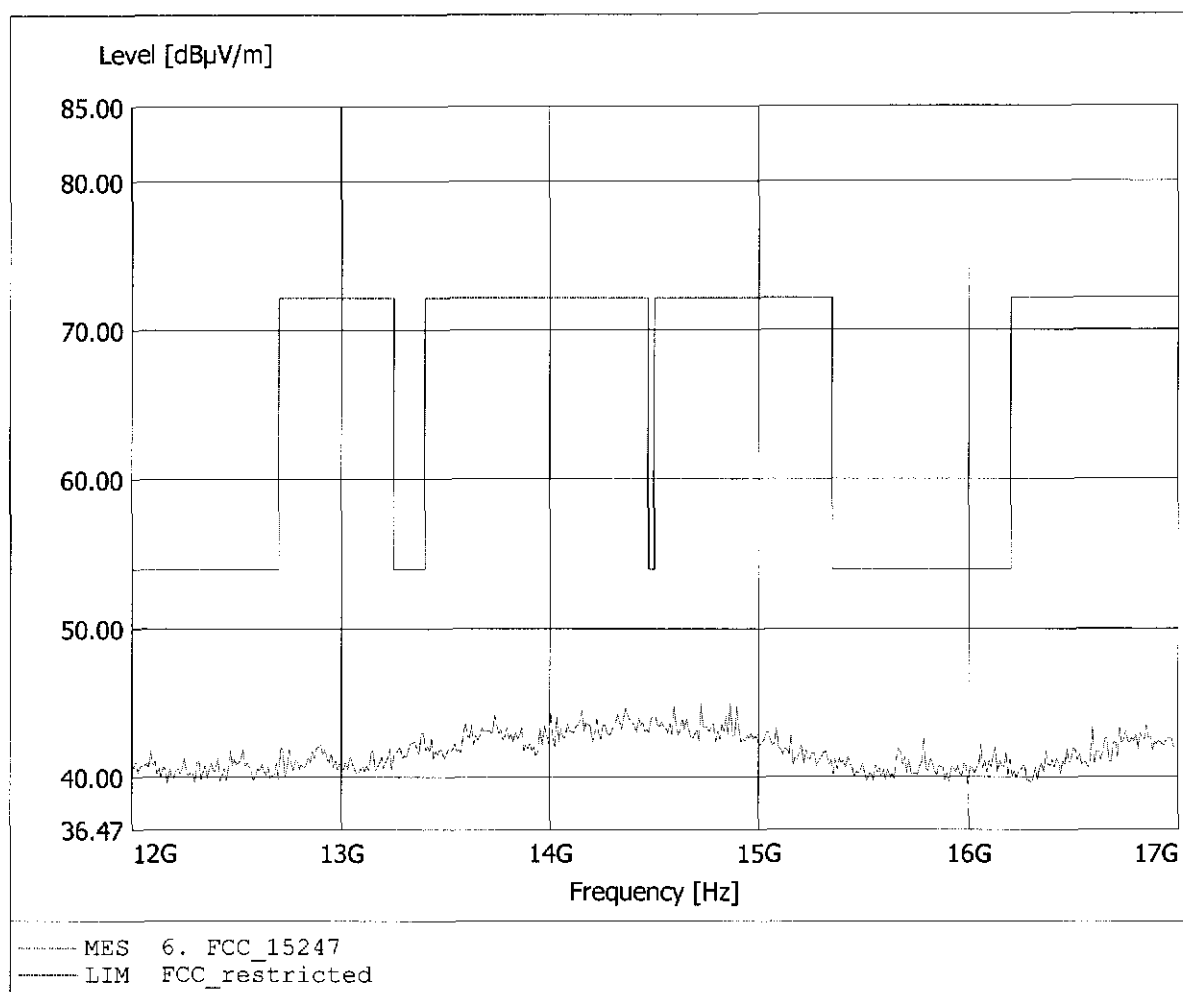


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.535GHz, Emax: 44.99dBuV/m, RBW: 1MHz

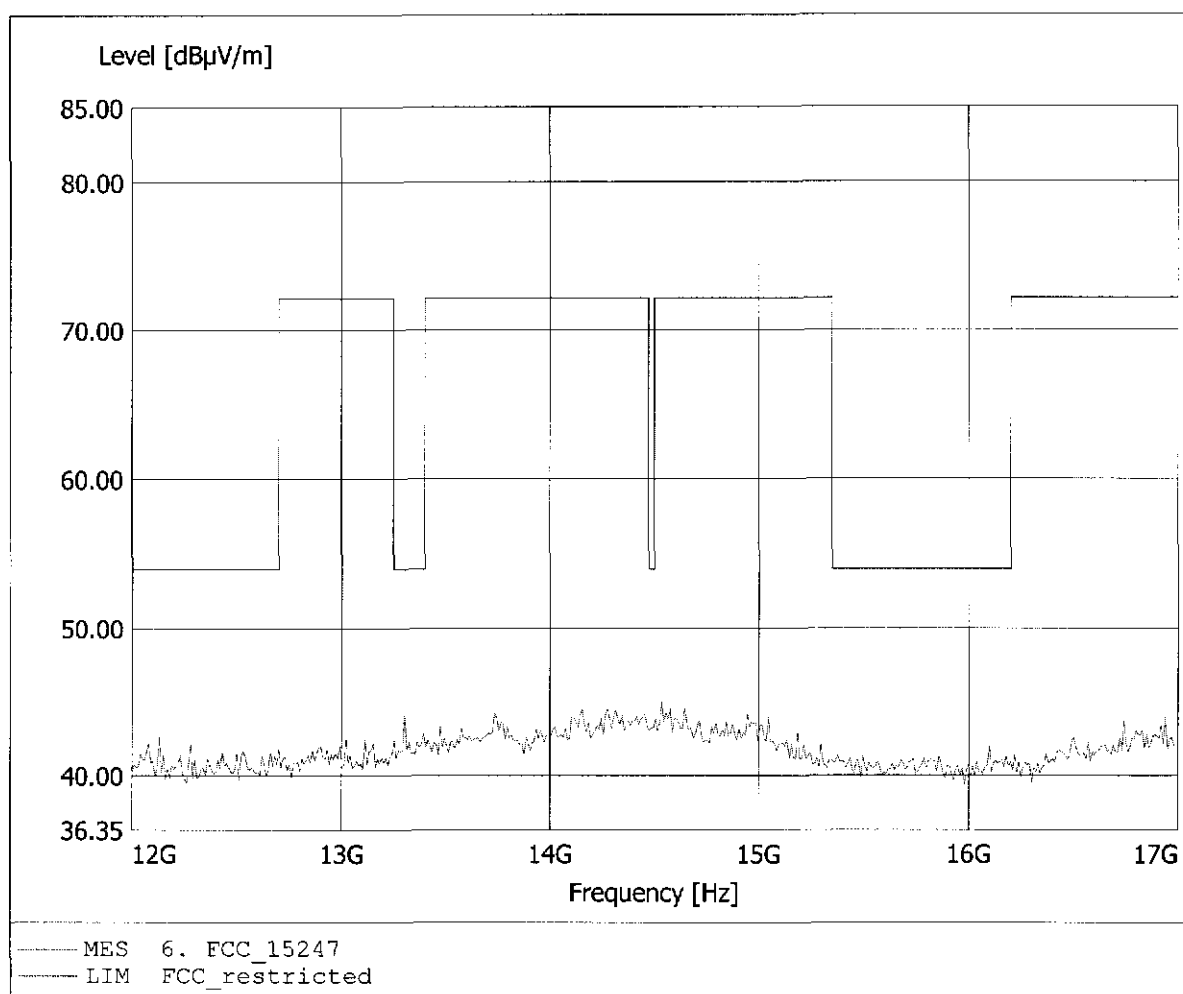


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 45.45dBµV/m, RBW: 1MHz

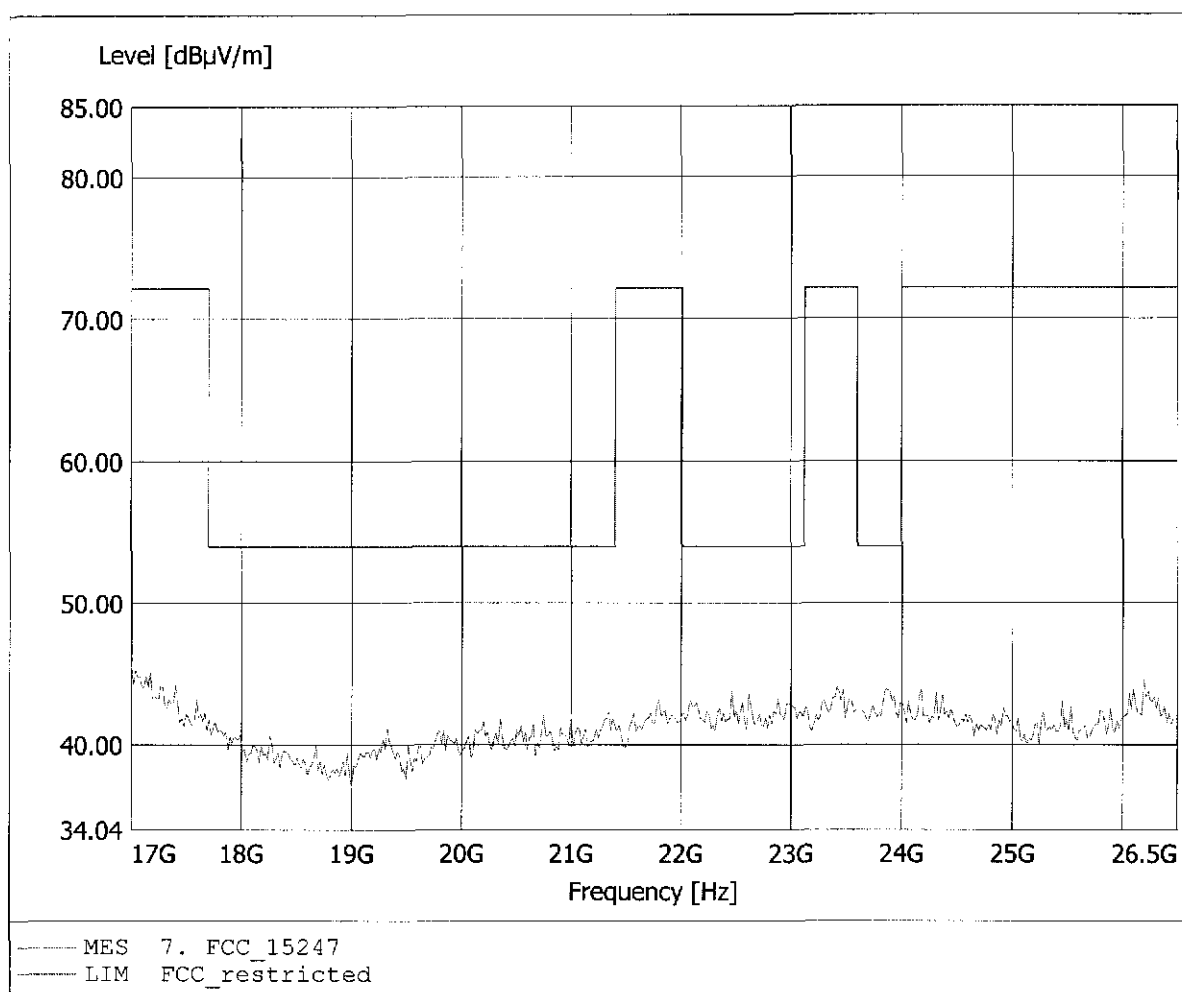


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 46.21dBµV/m, RBW: 1MHz

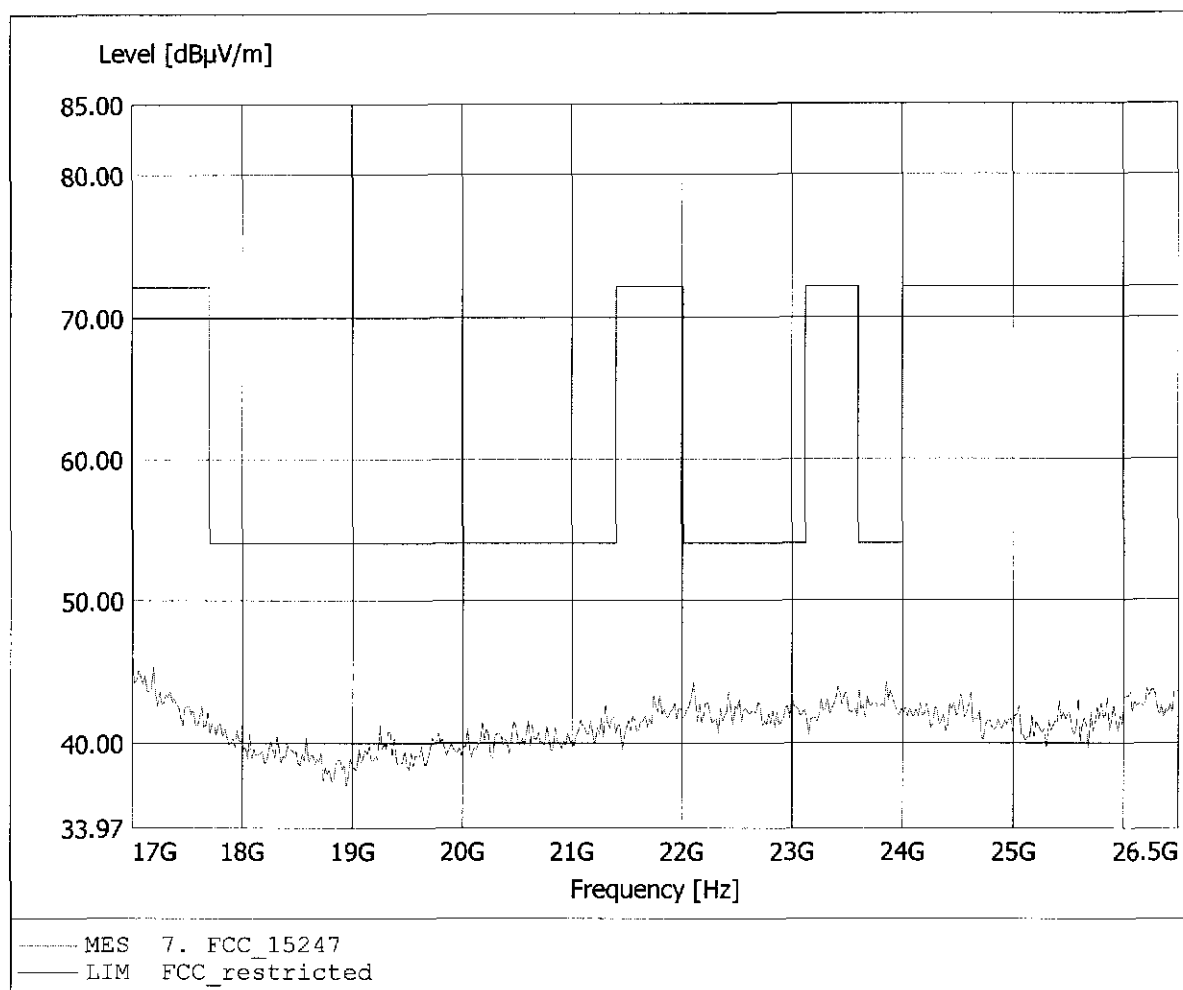


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 179.218MHz, Emax: 32.47dBµV/m, RBW: 100kHz

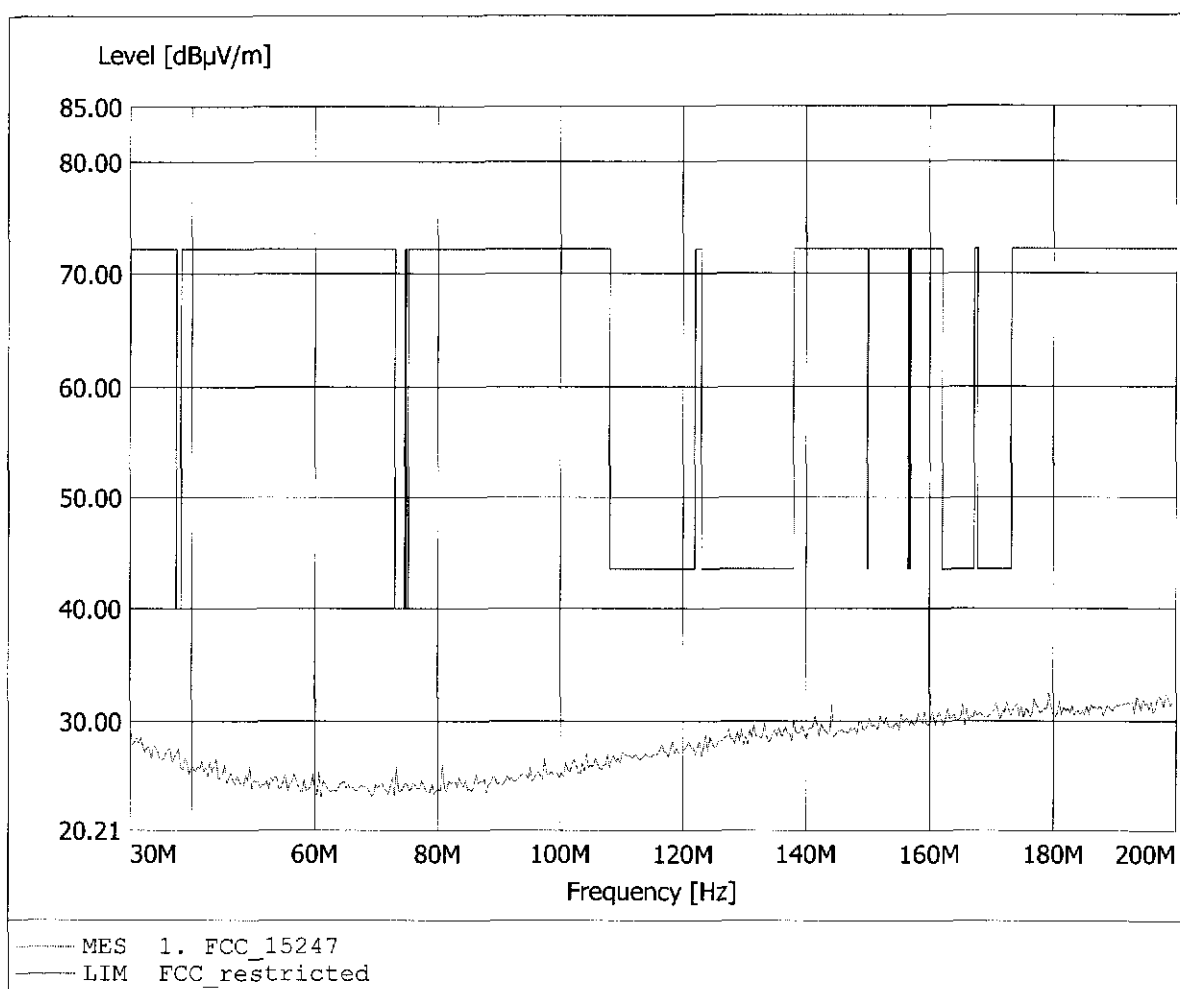


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 31.363MHz, Emax: 34.01dBµV/m, RBW: 100kHz

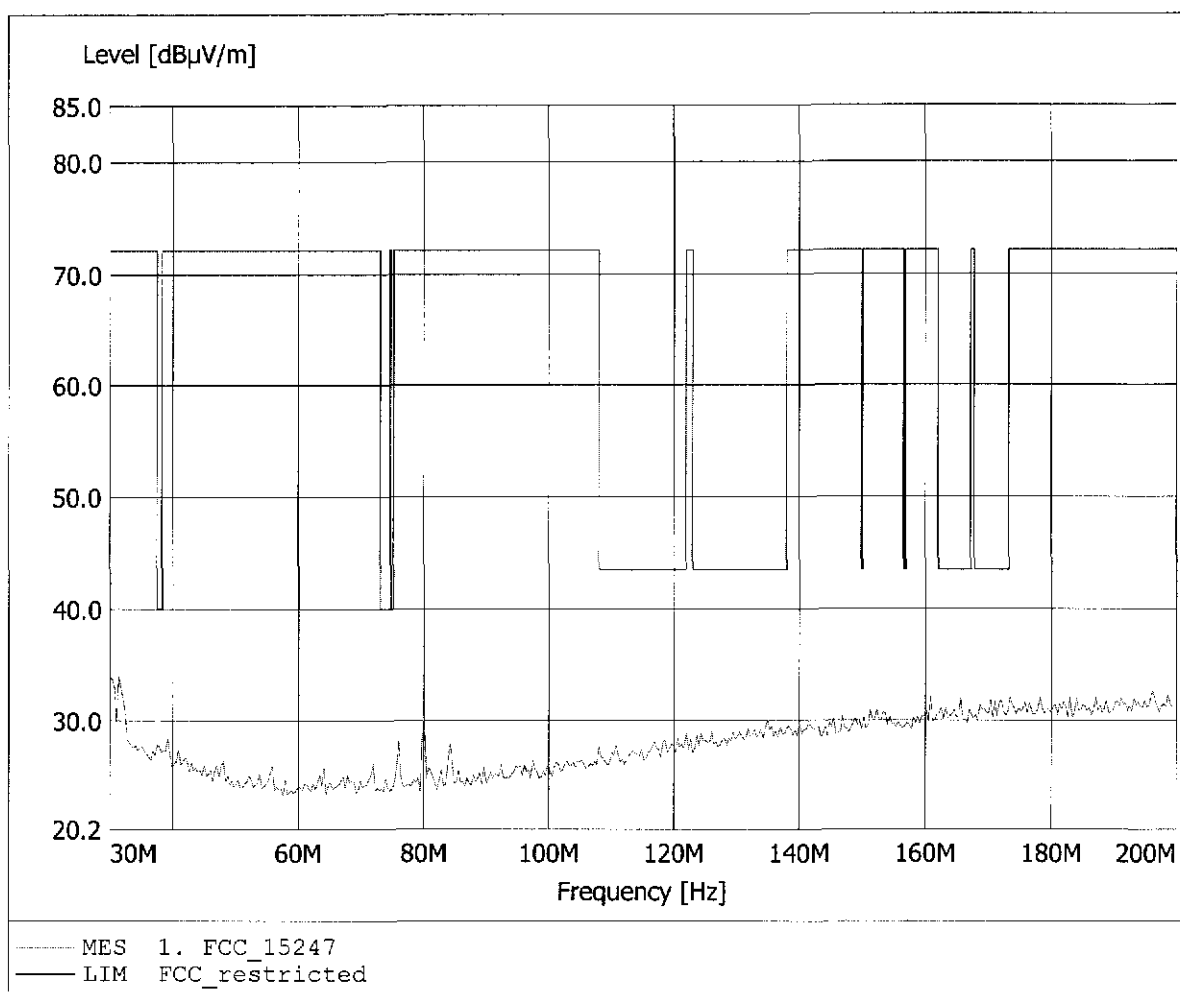


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 240.080MHz, Emax: 25.90dBµV/m, RBW: 100kHz

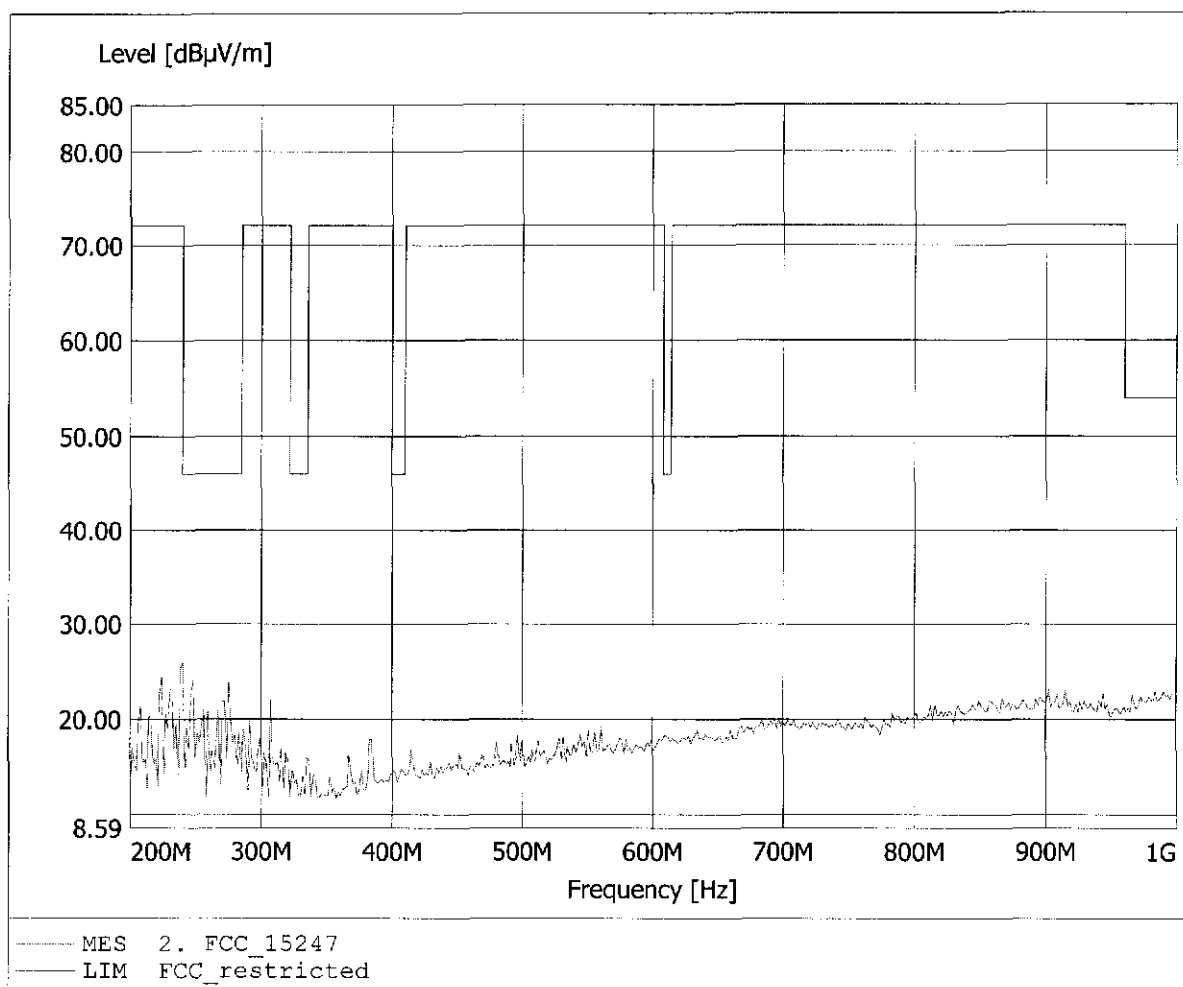


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 206.413MHz, Emax: 25.44dBµV/m, RBW: 100kHz

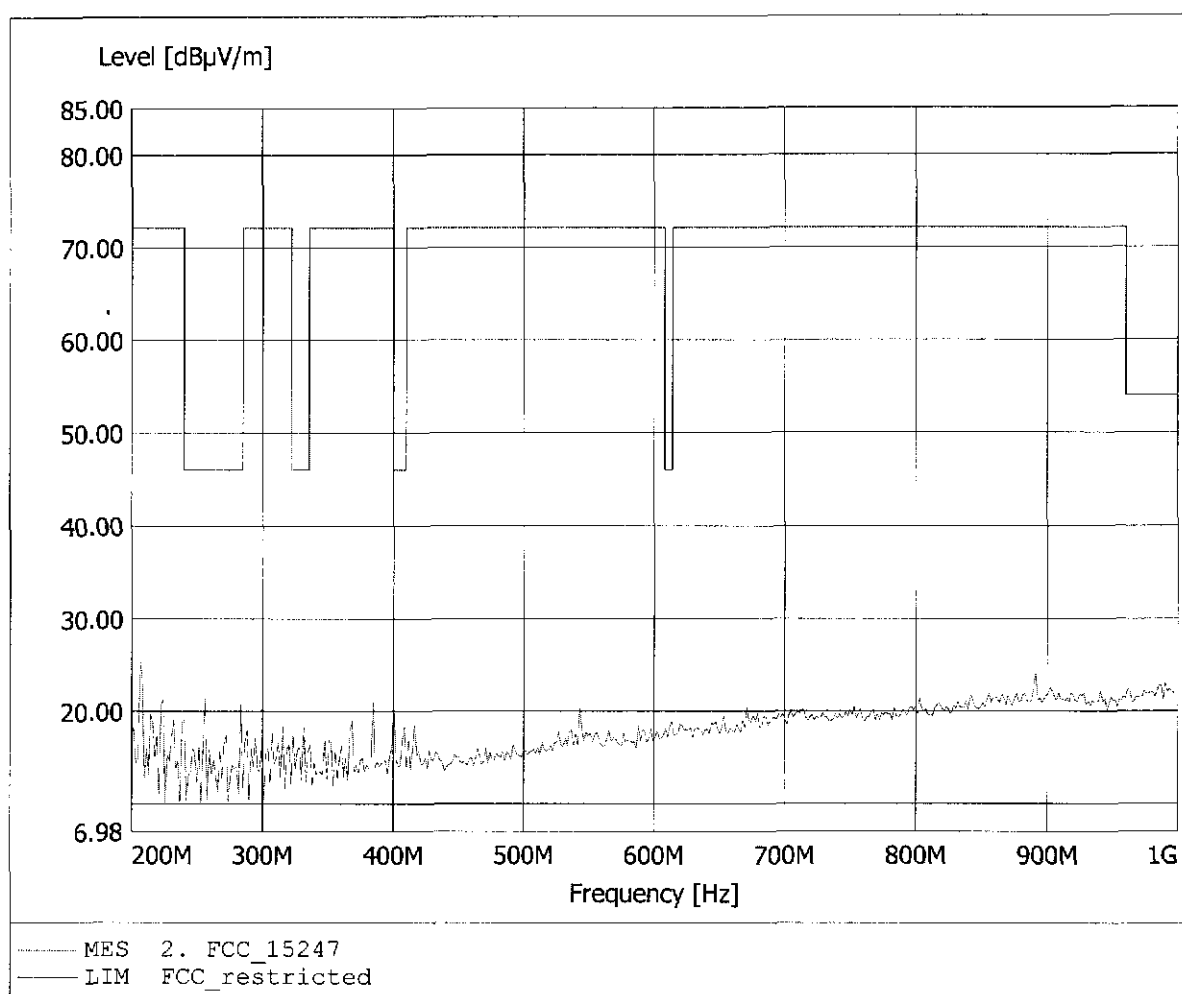


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.628GHz, Emax: 44.34dBµV/m, RBW: 1MHz

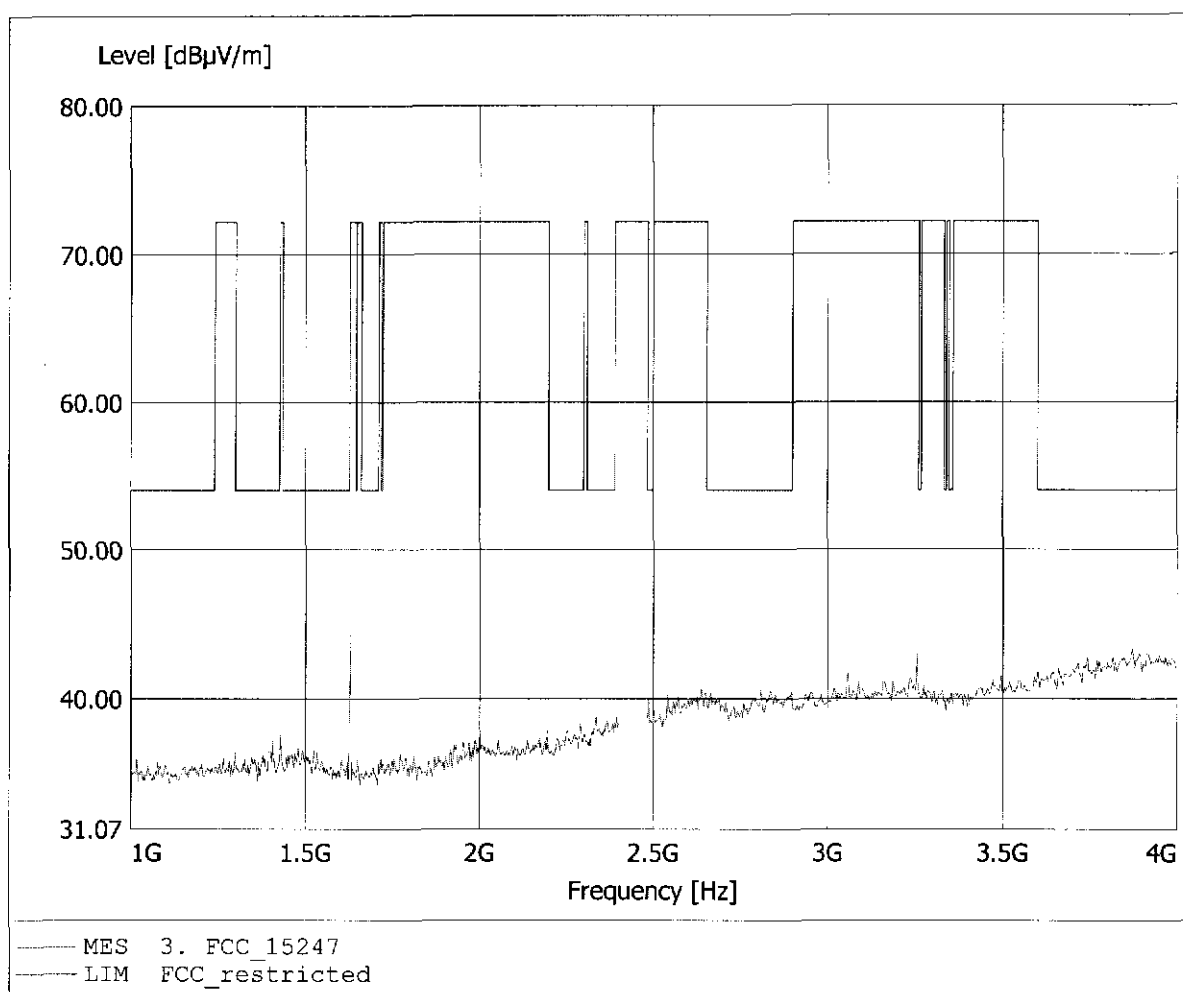


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.628GHz, Emax: 46.20dBµV/m, RBW: 1MHz

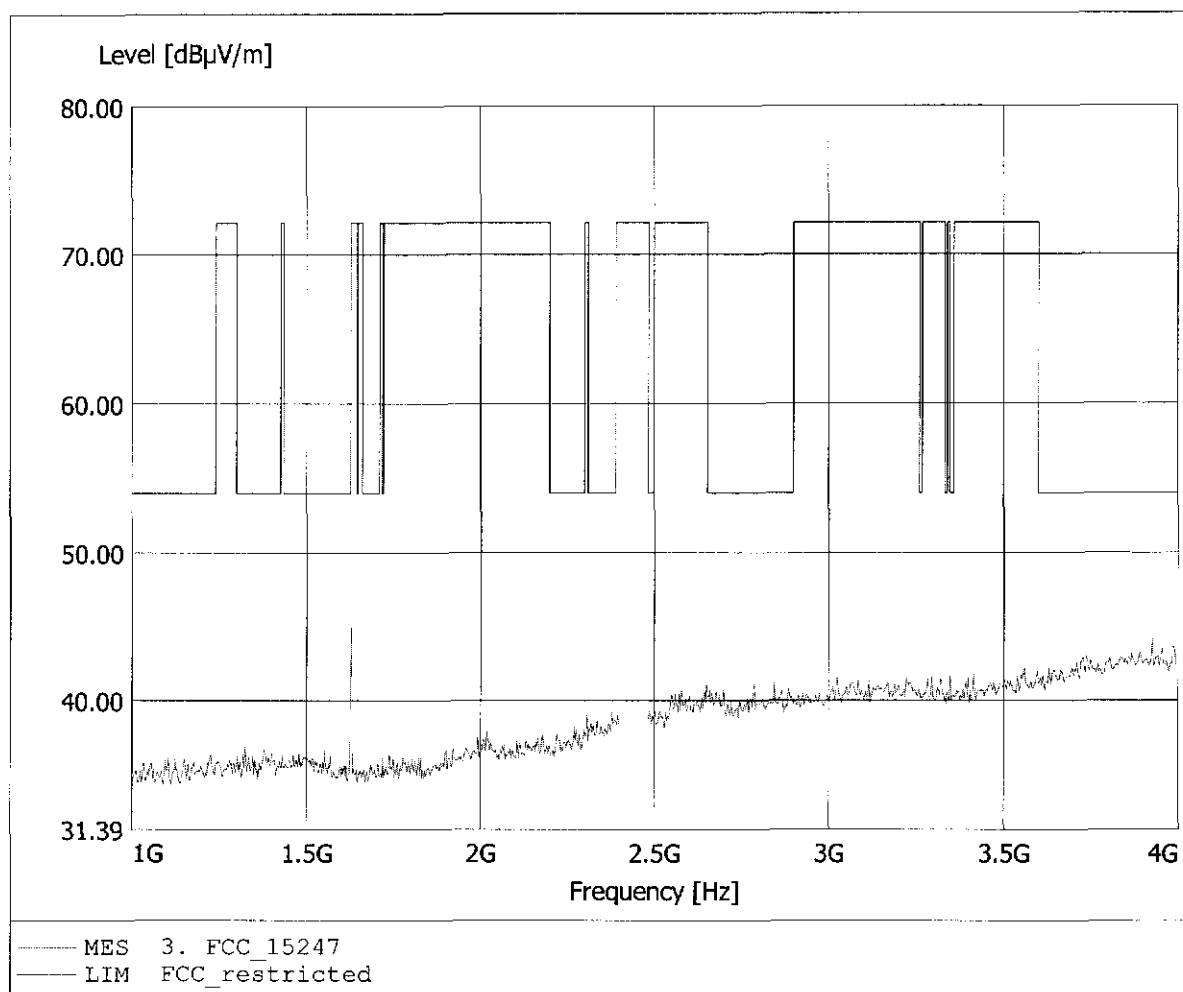


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.992GHz, Emax: 38.85dBµV/m, RBW: 1MHz

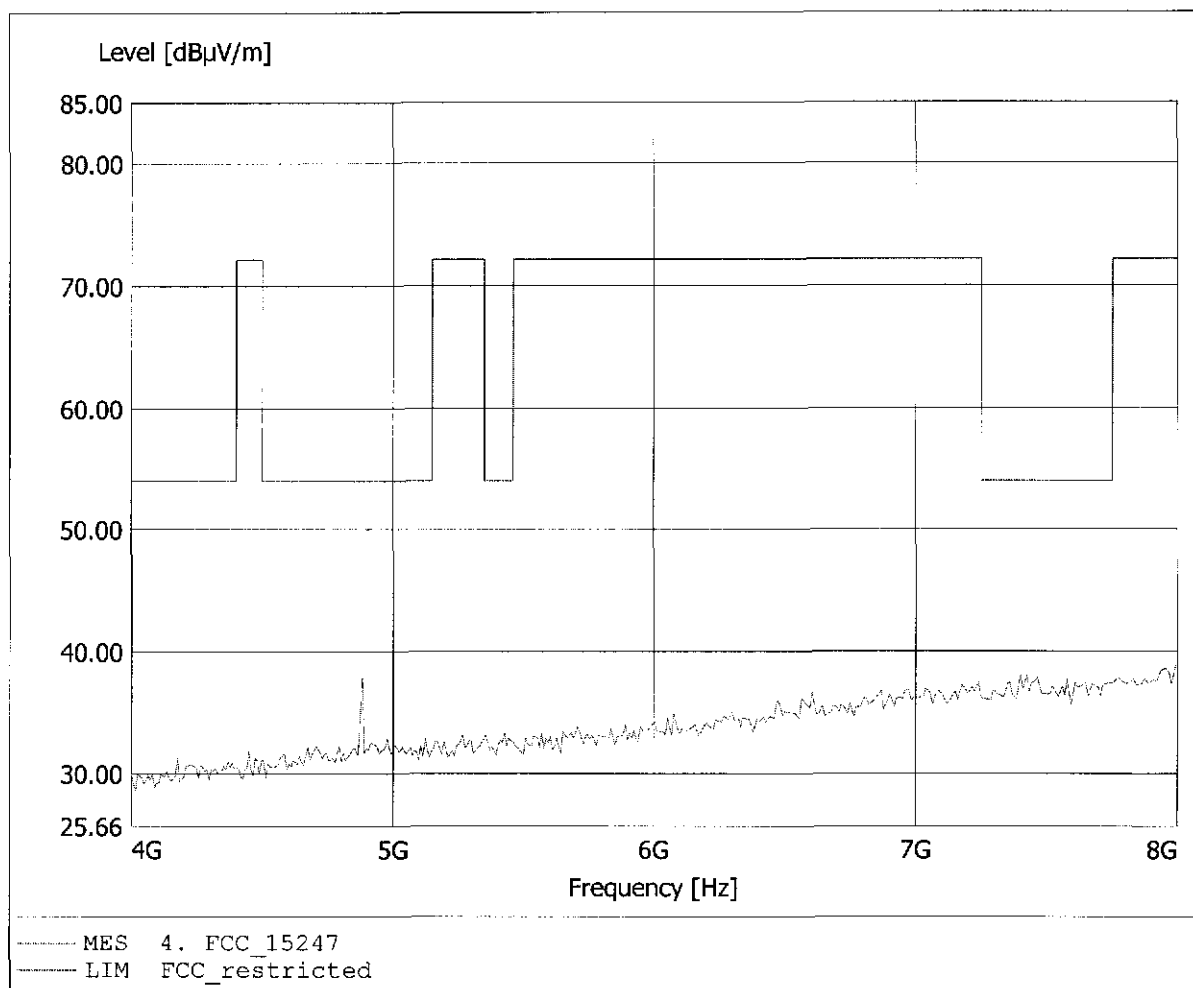


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.984GHz, Emax: 38.47dBµV/m, RBW: 1MHz

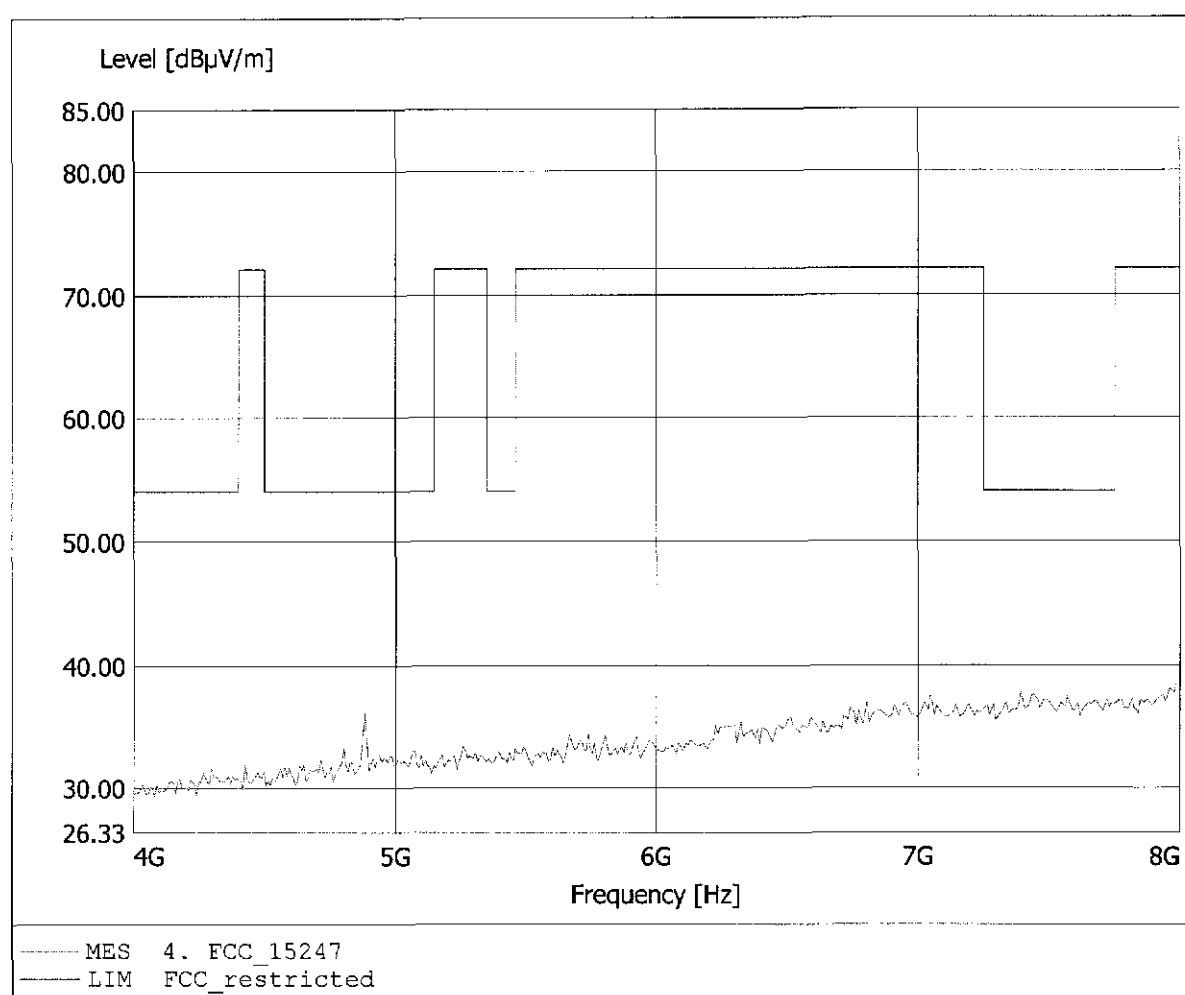


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.535GHz, Emax: 43.55dBµV/m, RBW: 1MHz

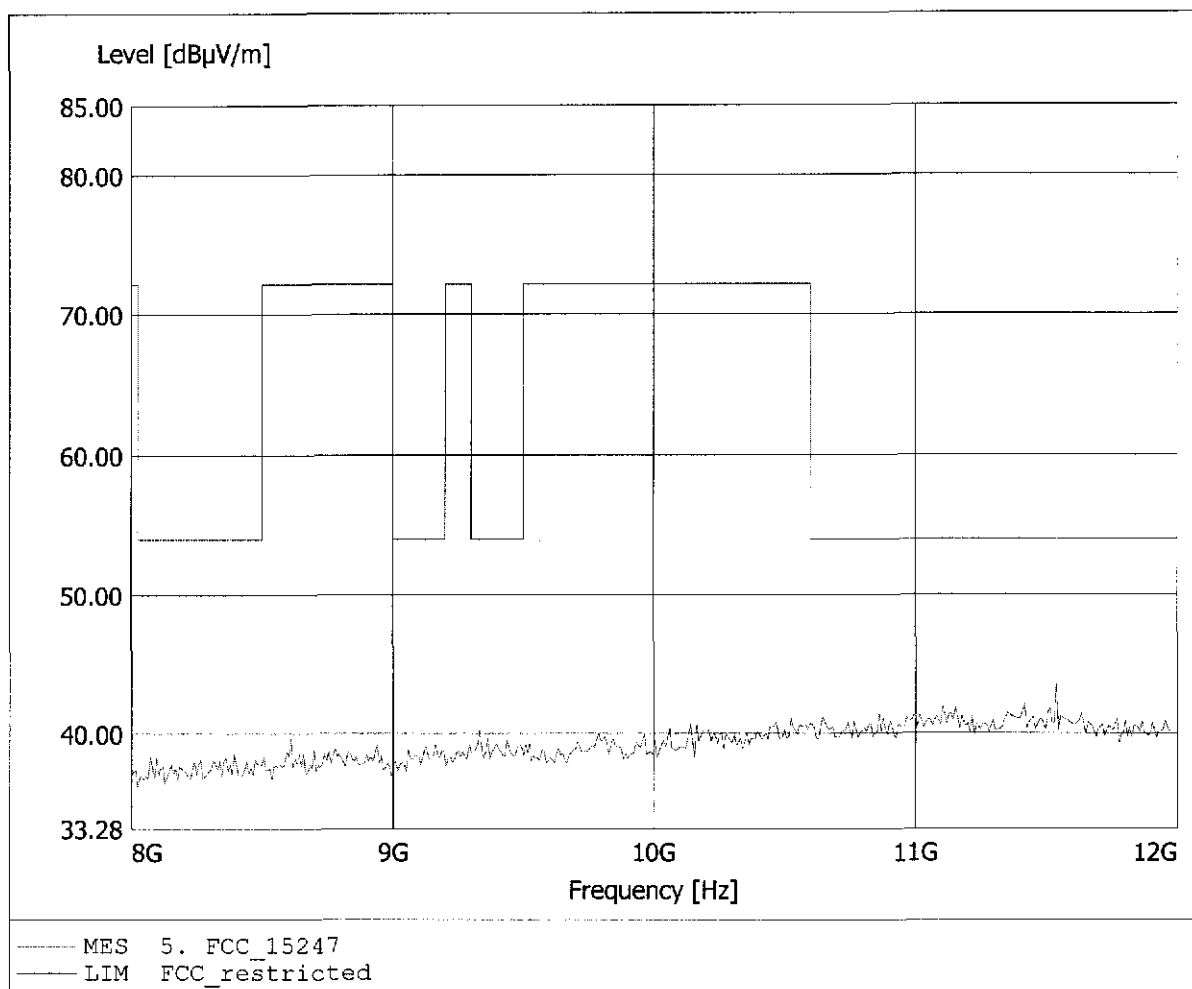


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.110GHz, Emax: 42.74dBµV/m, RBW: 1MHz

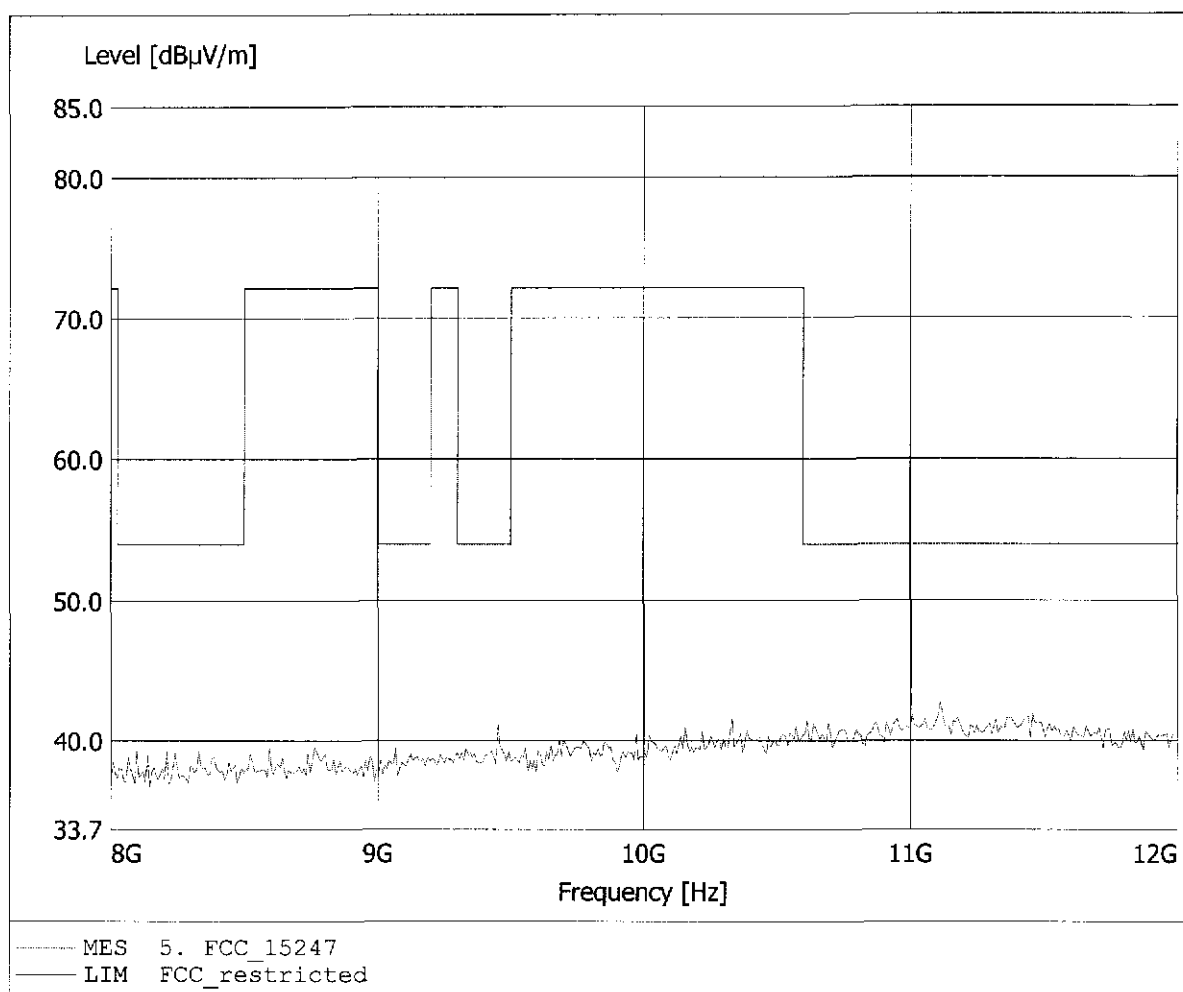


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.595GHz, Emax: 44.85dBuV/m, RBW: 1MHz

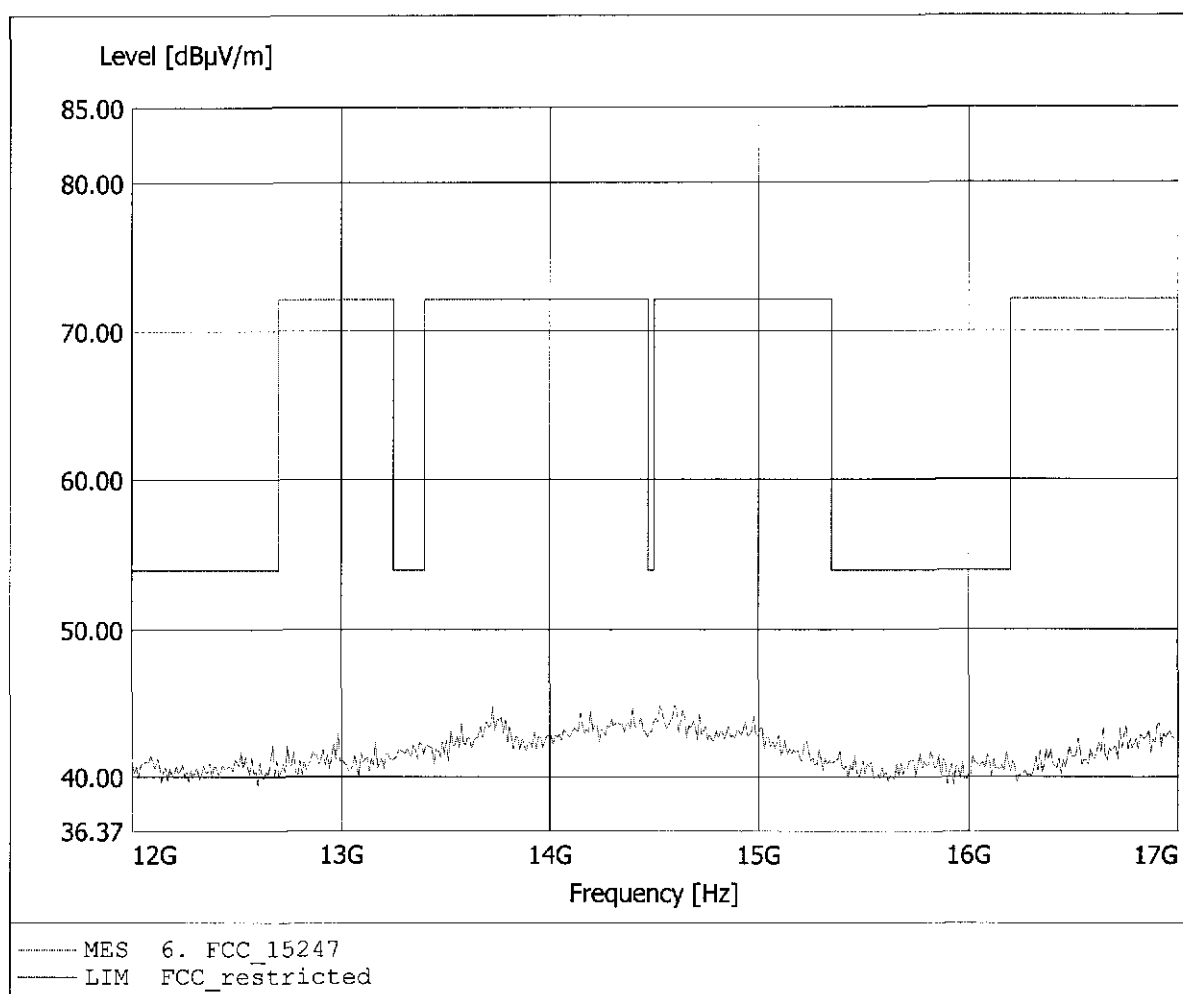


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 13.743GHz, Emax: 45.25dBµV/m, RBW: 1MHz

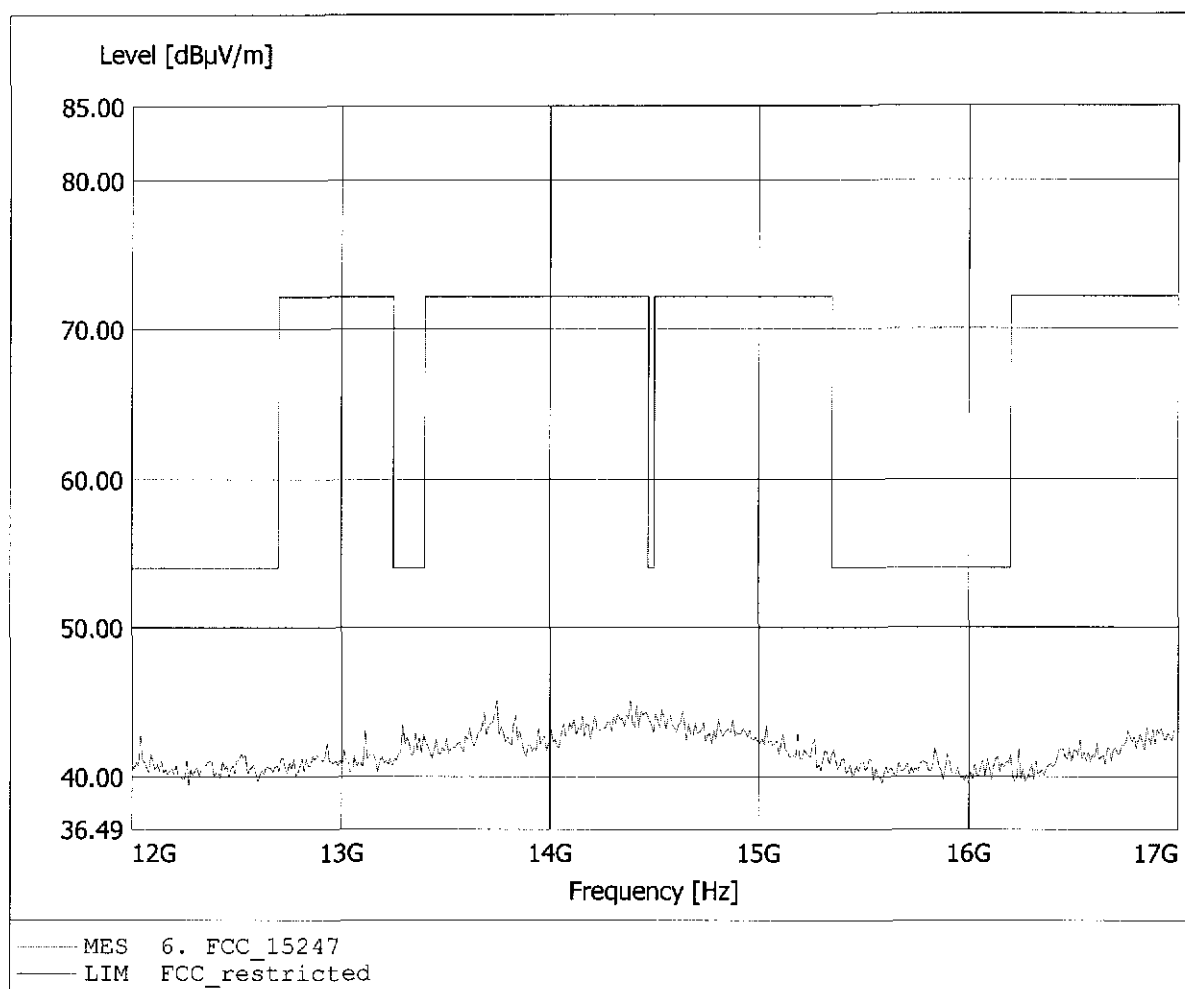


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.019GHz, Emax: 45.25dBuV/m, RBW: 1MHz

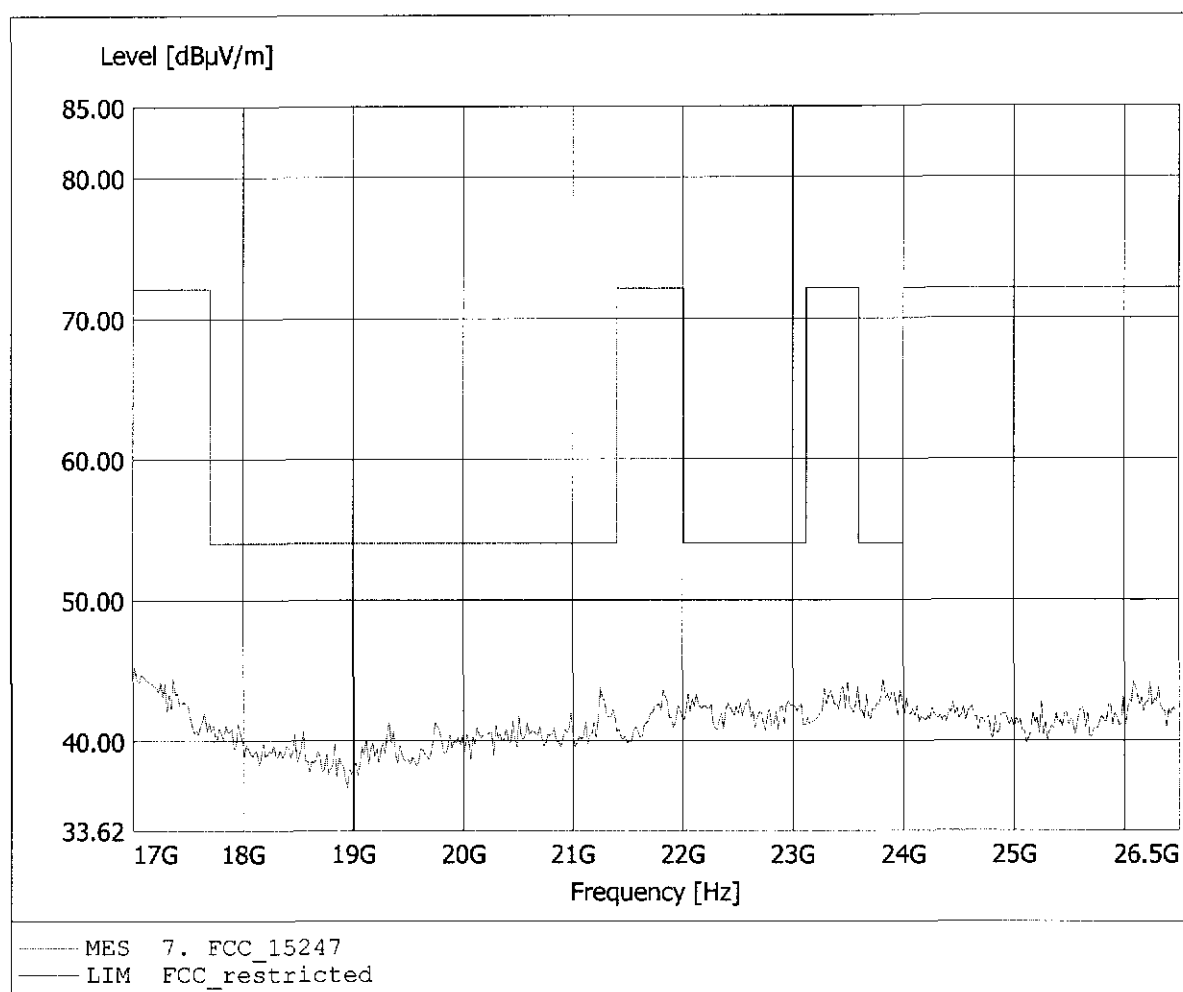


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.095GHz, Emax: 45.78dBµV/m, RBW: 1MHz

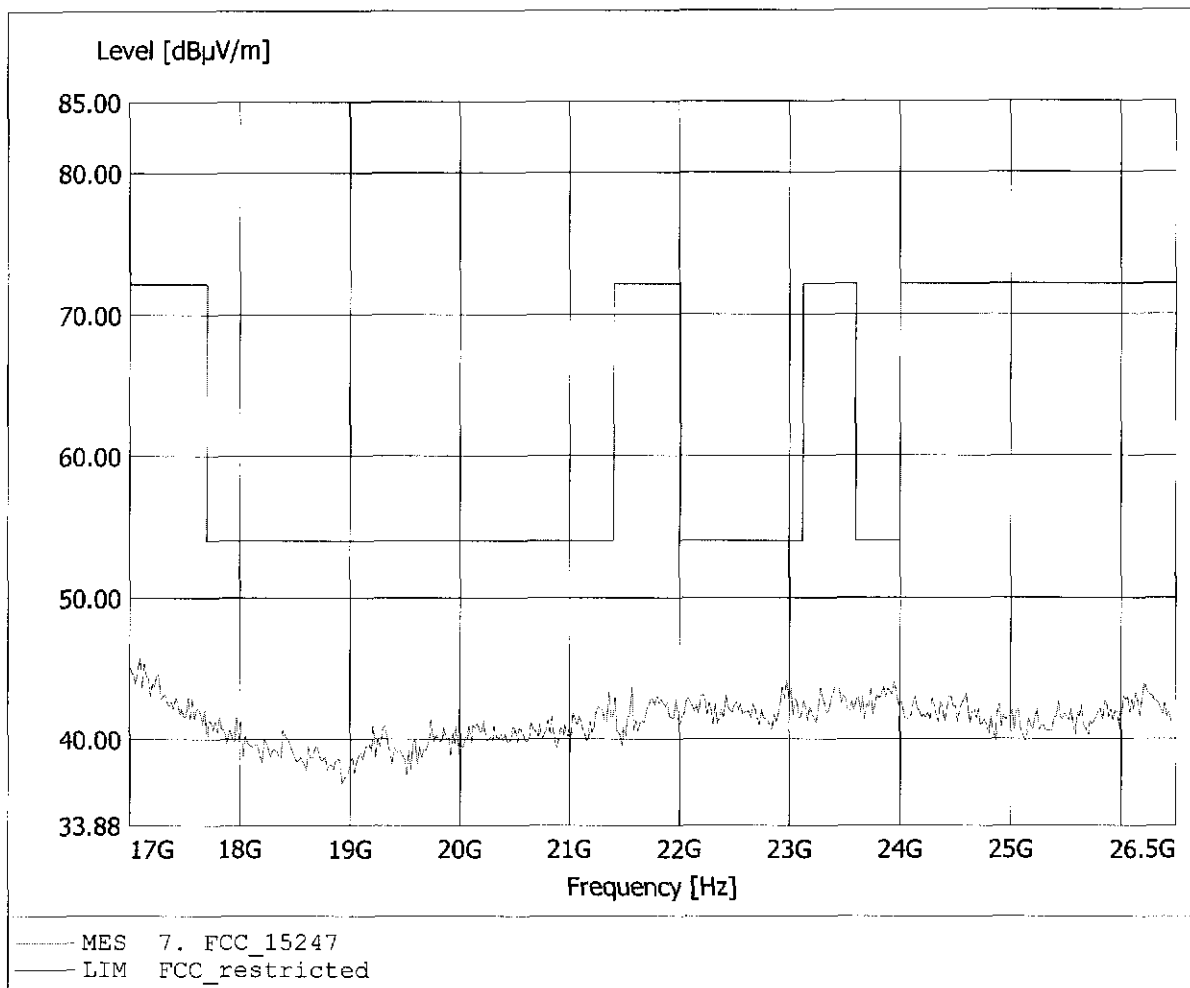


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 190.461MHz, Emax: 33.31dBµV/m, RBW: 100kHz

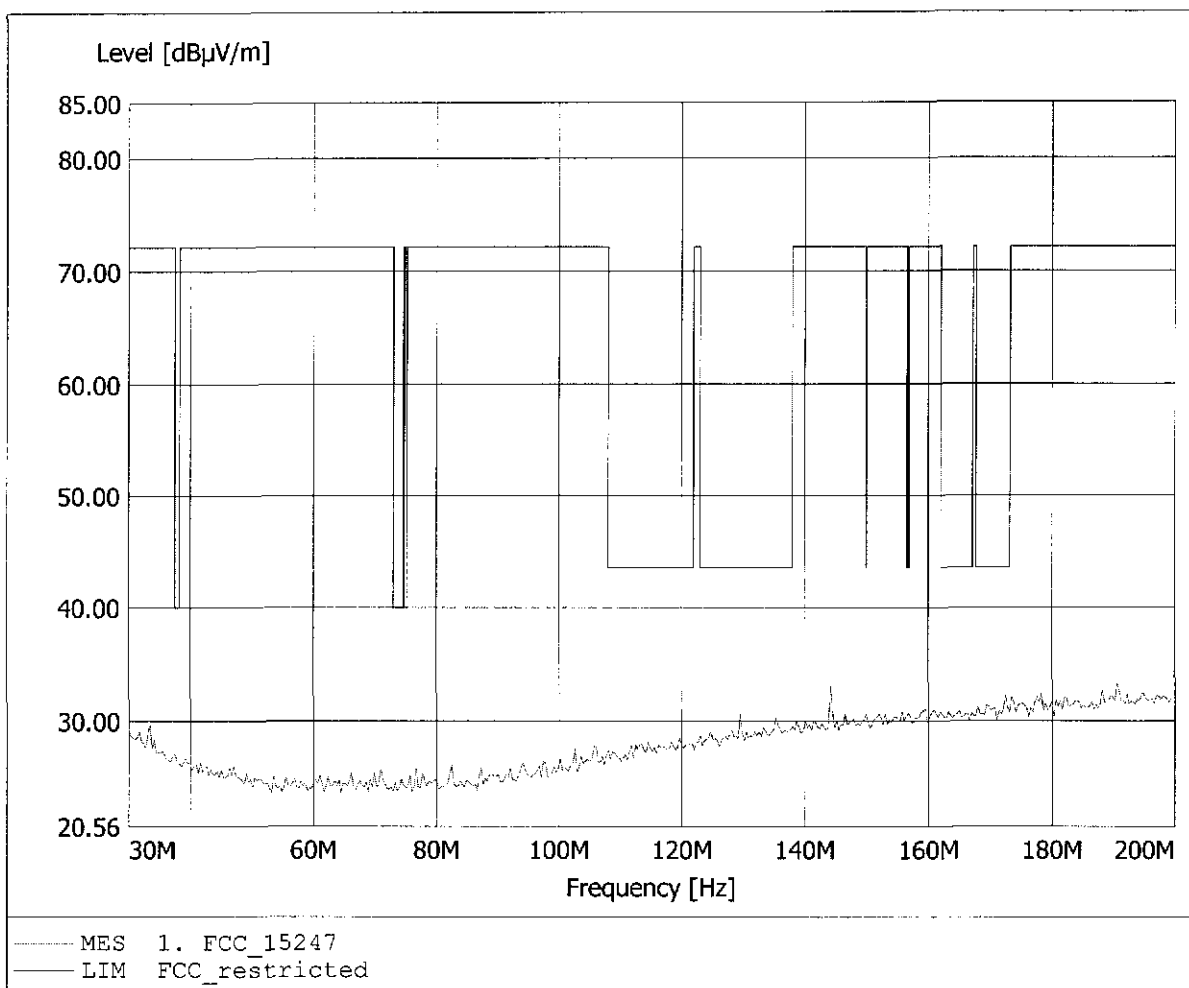


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 30.341MHz, Emax: 35.29dBµV/m, RBW: 100kHz

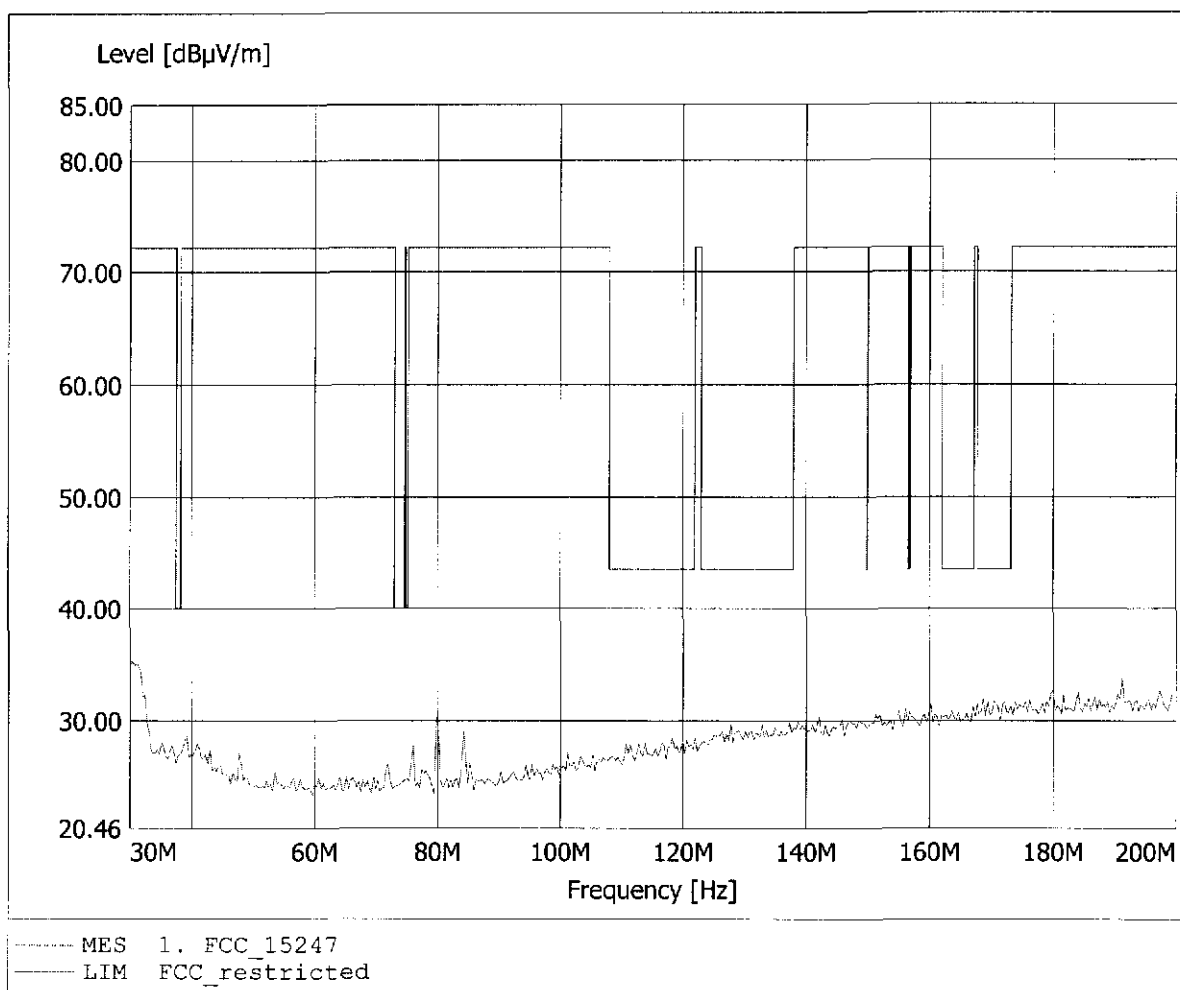


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 240.080MHz, Emax: 27.39dBµV/m, RBW: 100kHz

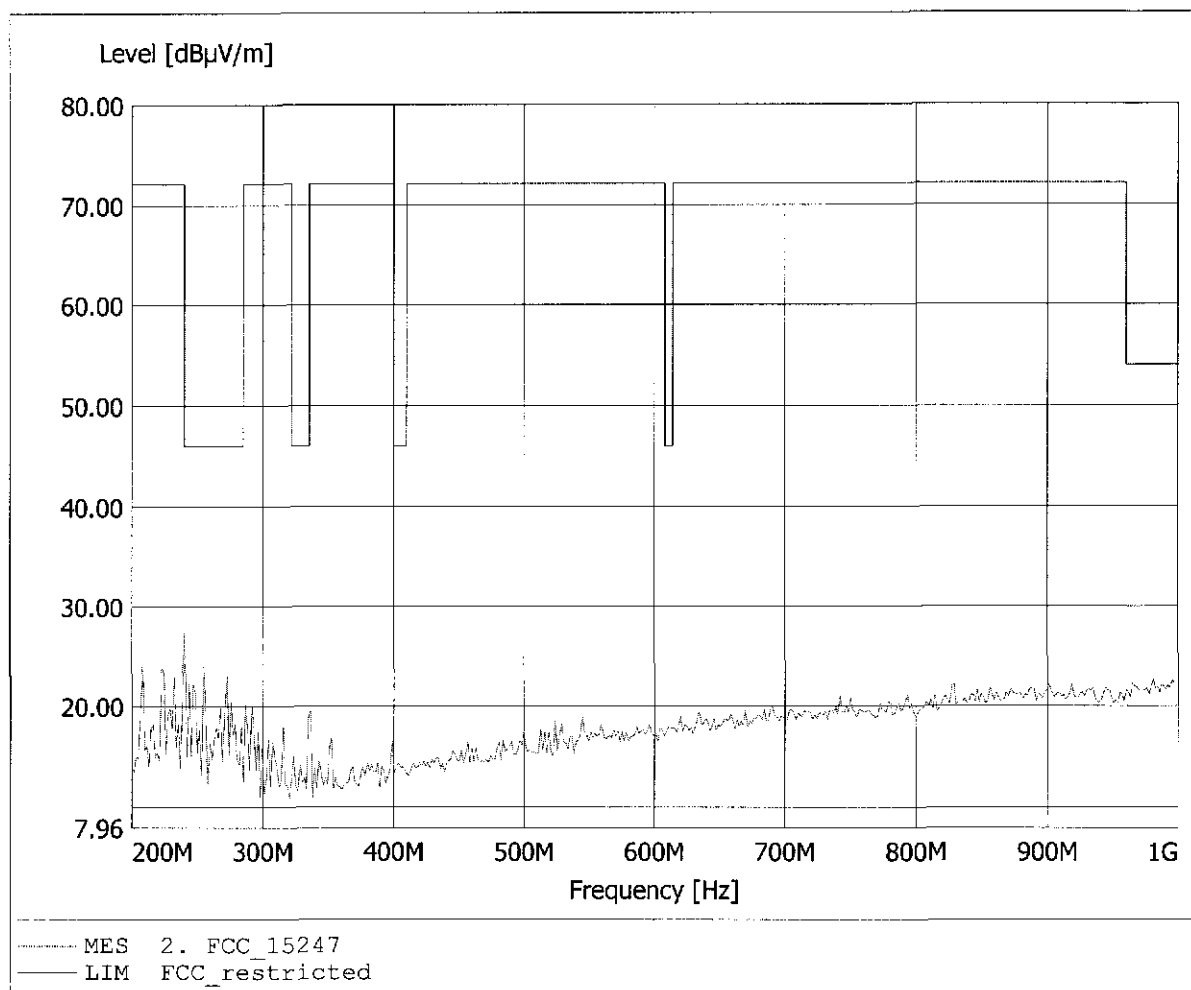


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 208.016MHz, Emax: 25.85dBµV/m, RBW: 100kHz

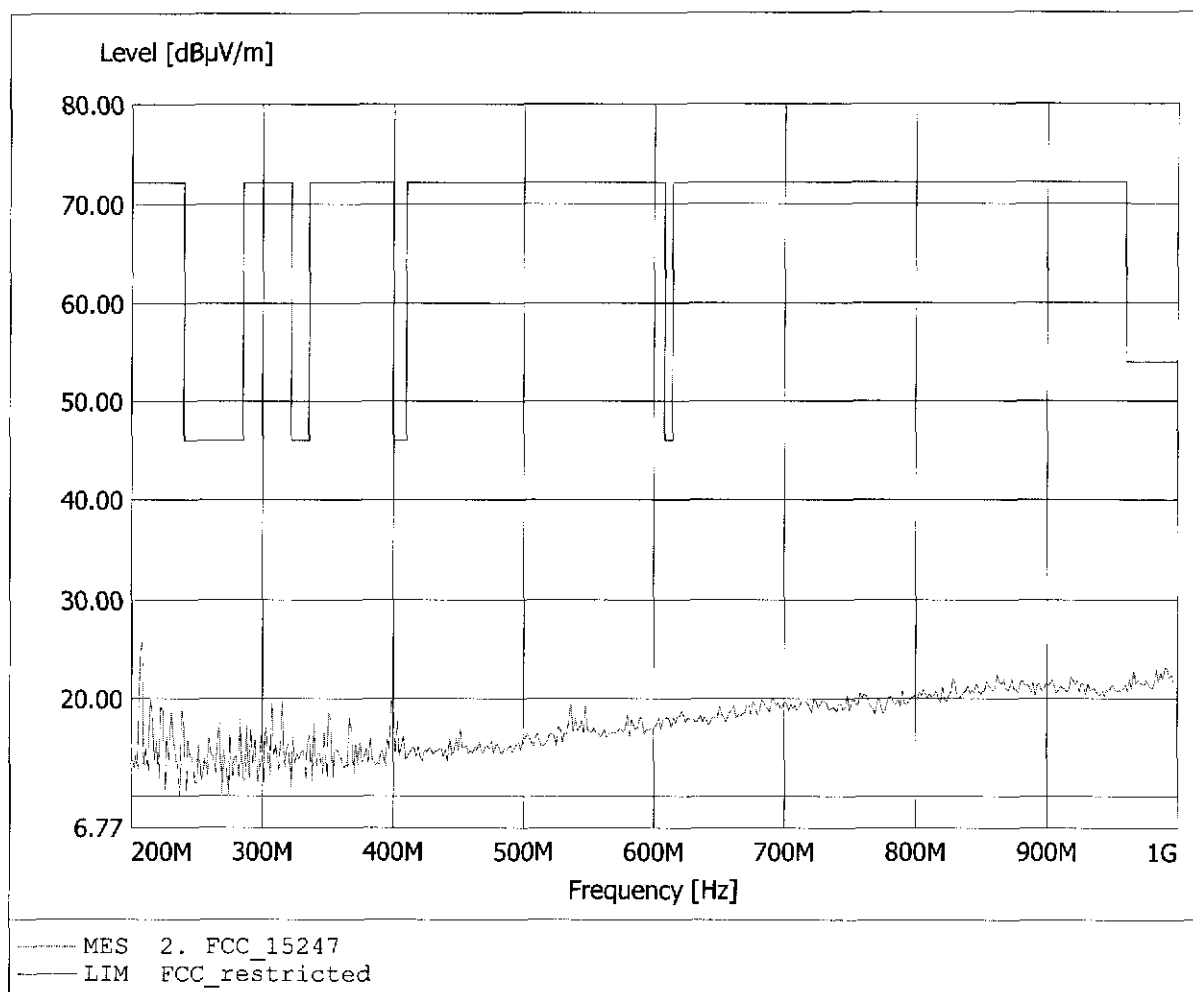


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.654GHz, Emax: 44.27dBµV/m, RBW: 1MHz

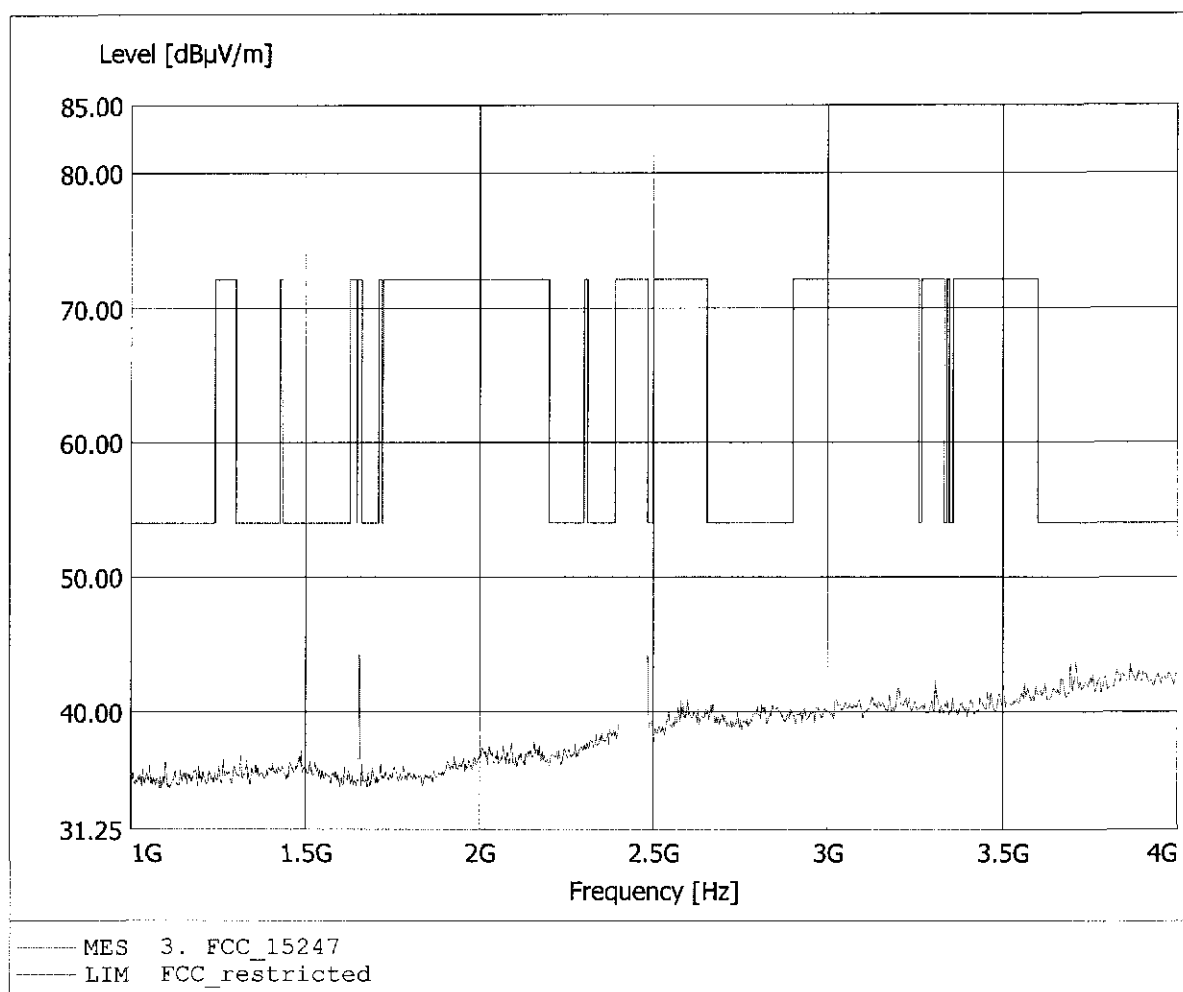


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 48.69dBµV/m, RBW: 1MHz

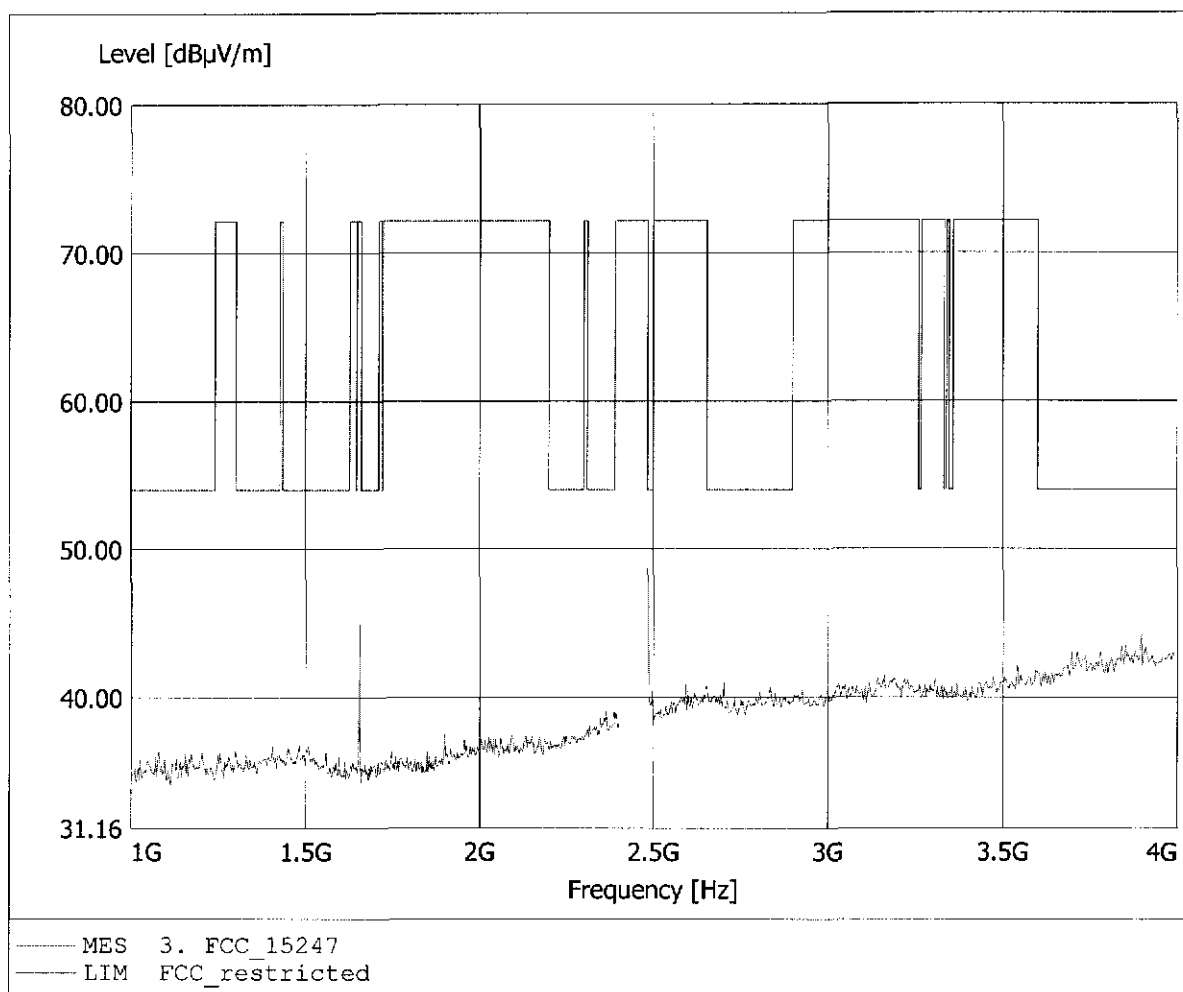


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 40.01dBµV/m, RBW: 1MHz

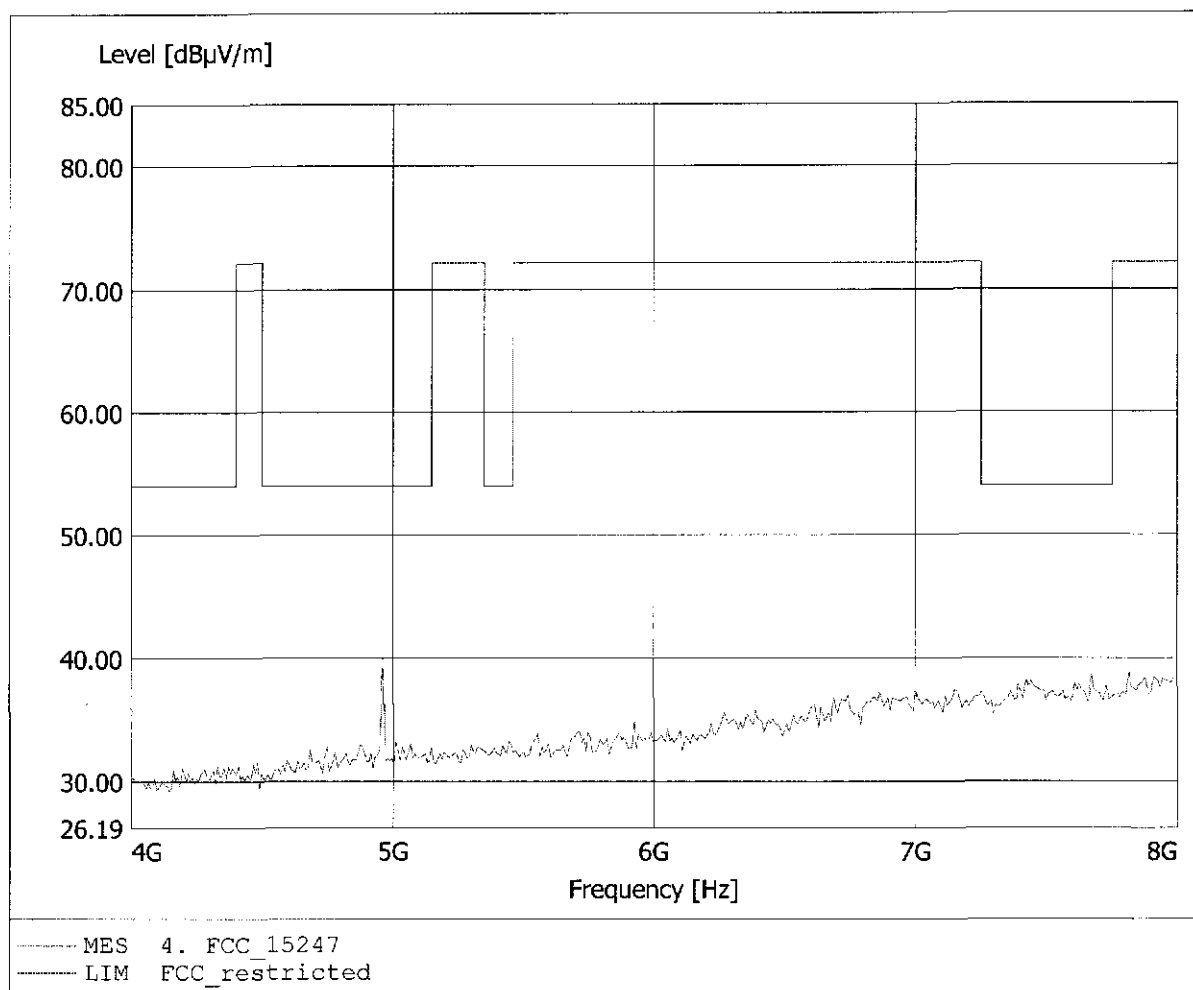


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.960GHz, Emax: 39.41dBµV/m, RBW: 1MHz

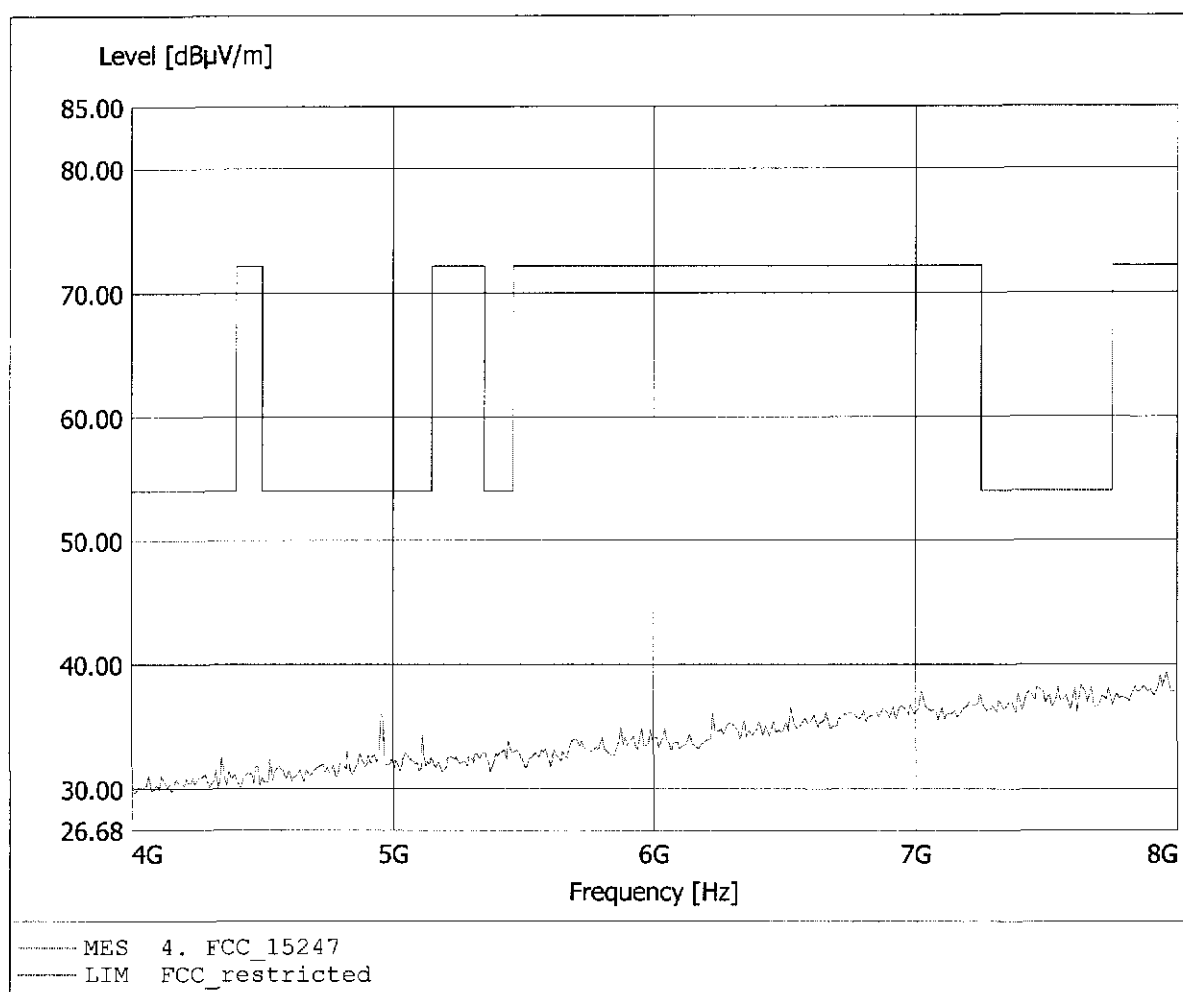


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.102GHz, Emax: 42.22dBµV/m, RBW: 1MHz

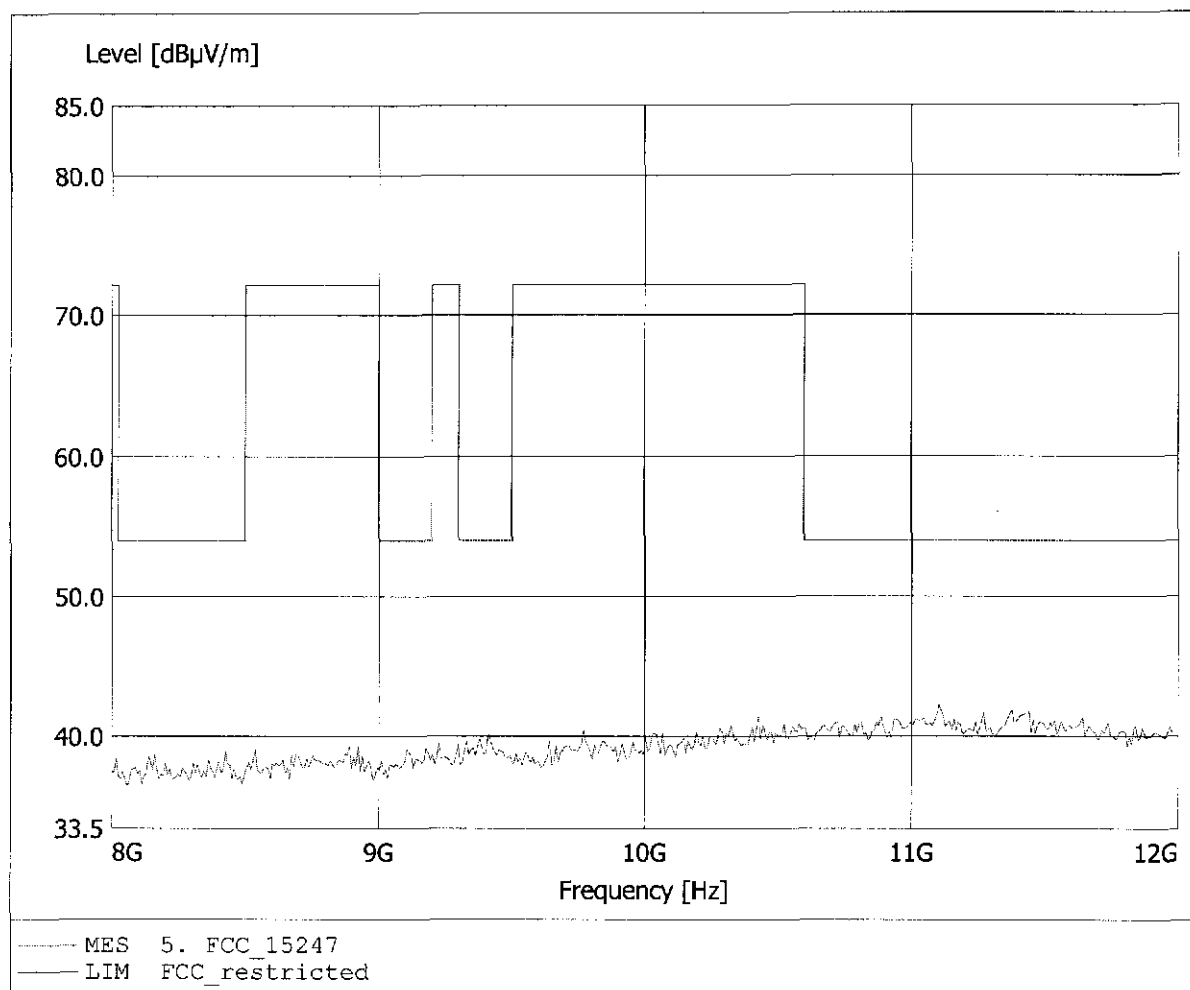


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.126GHz, Emax: 42.50dBµV/m, RBW: 1MHz

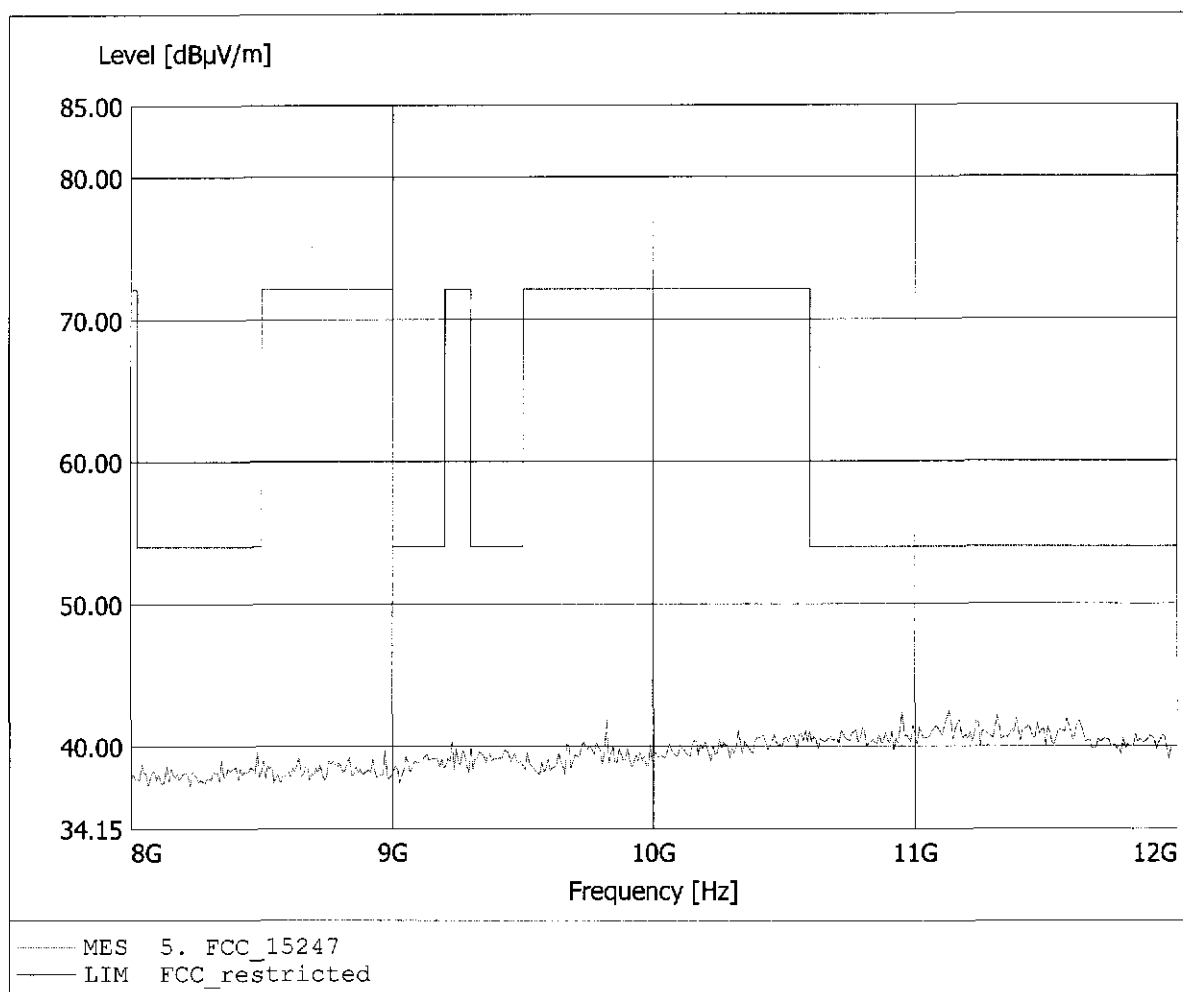


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 13.994GHz, Emax: 45.36dBµV/m, RBW: 1MHz

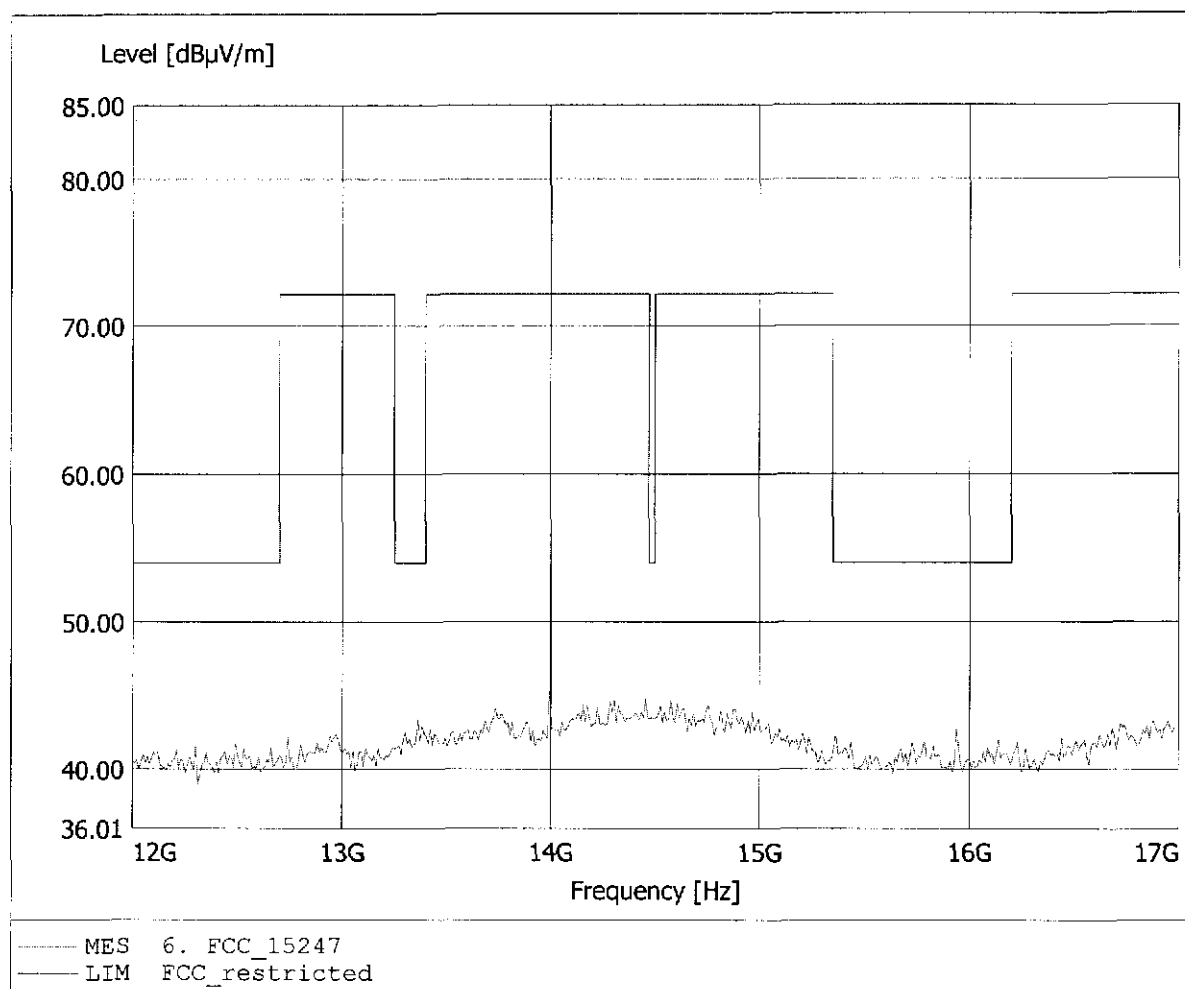


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.465GHz, Emax: 44.72dBµV/m, RBW: 1MHz

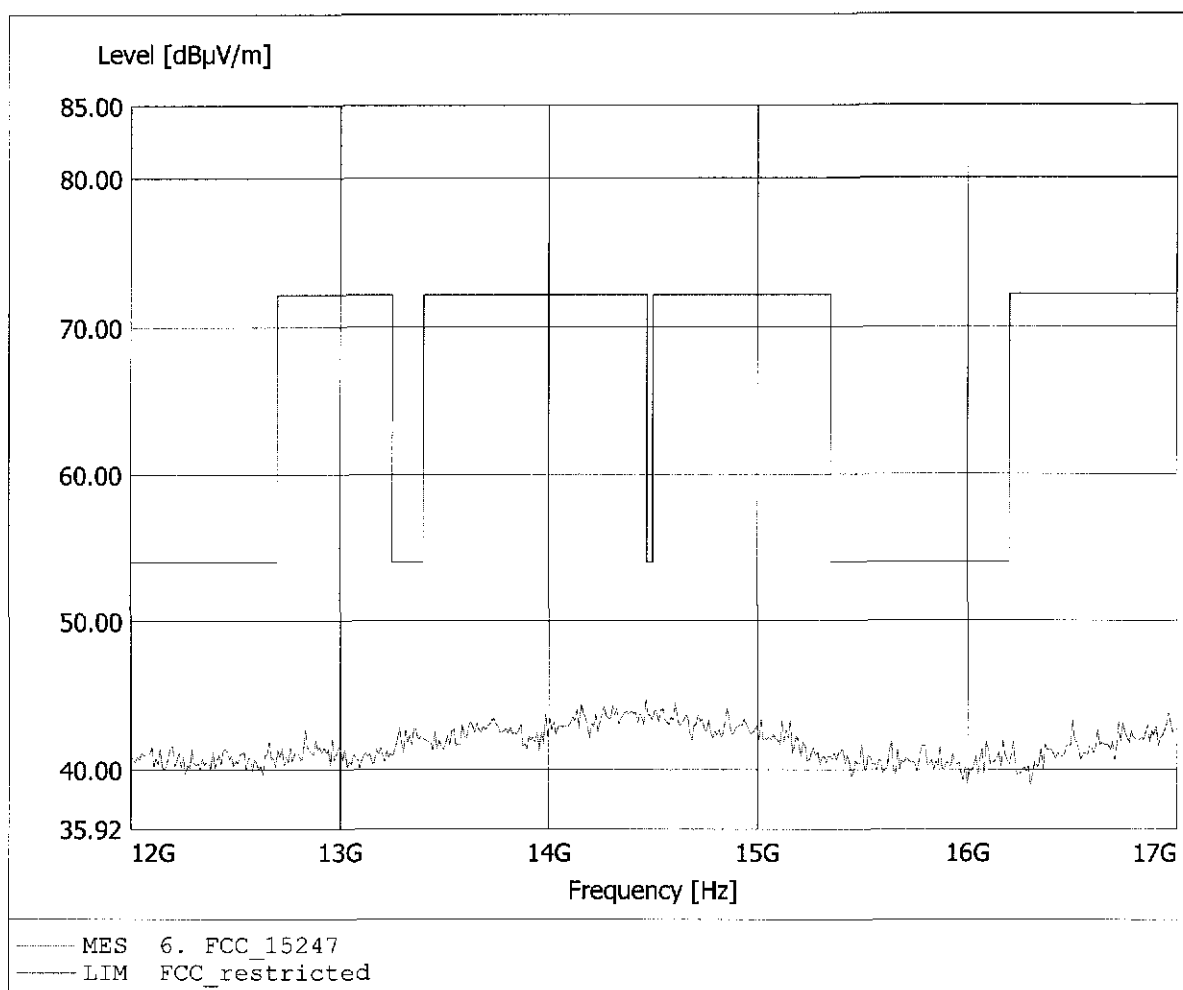


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 45.14dBuV/m, RBW: 1MHz

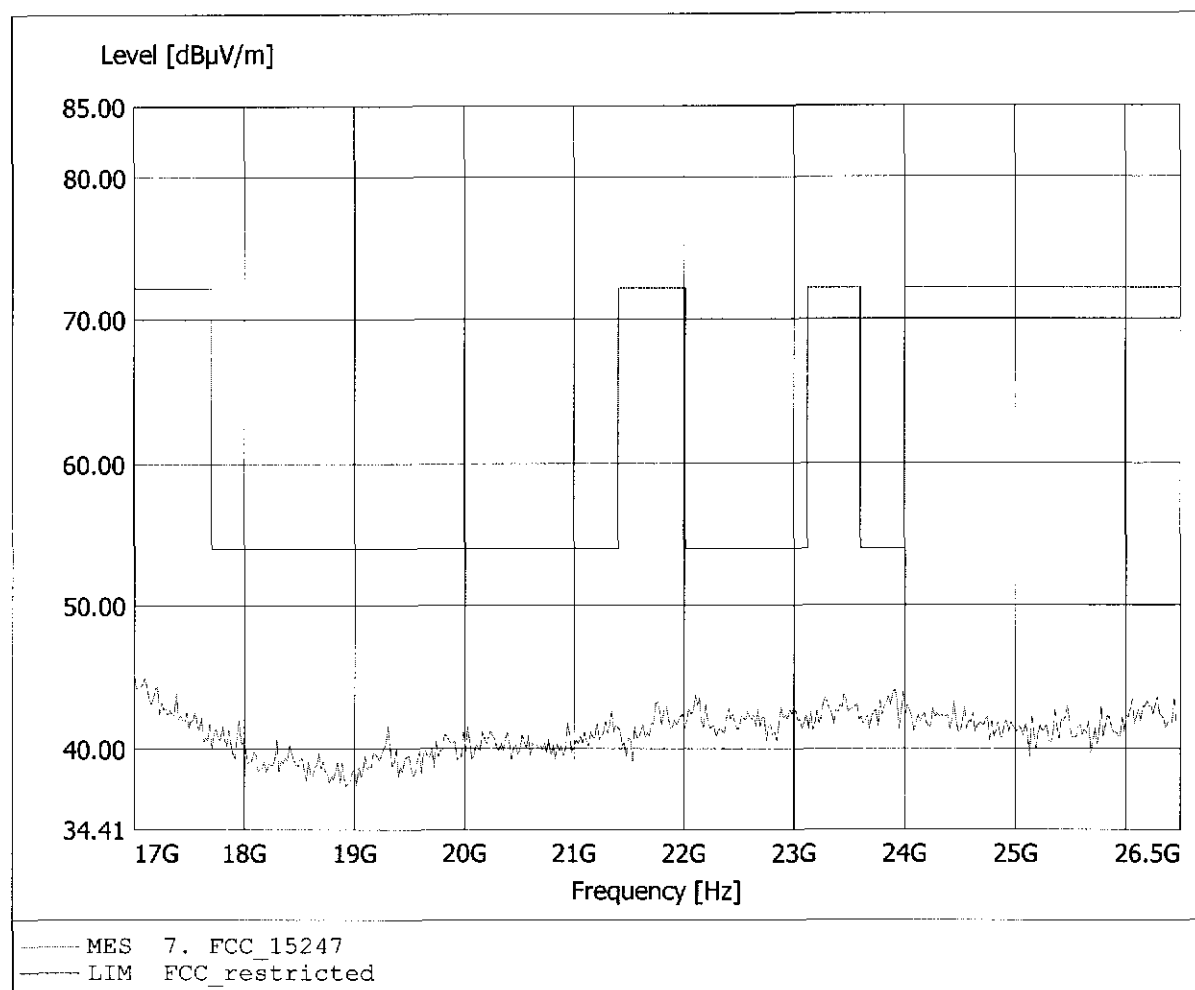

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT : Bluetooth Headset
Model: Jabra BT800 / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC (rechargeable battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.057GHz, Emax: 45.93dBµV/m, RBW: 1MHz

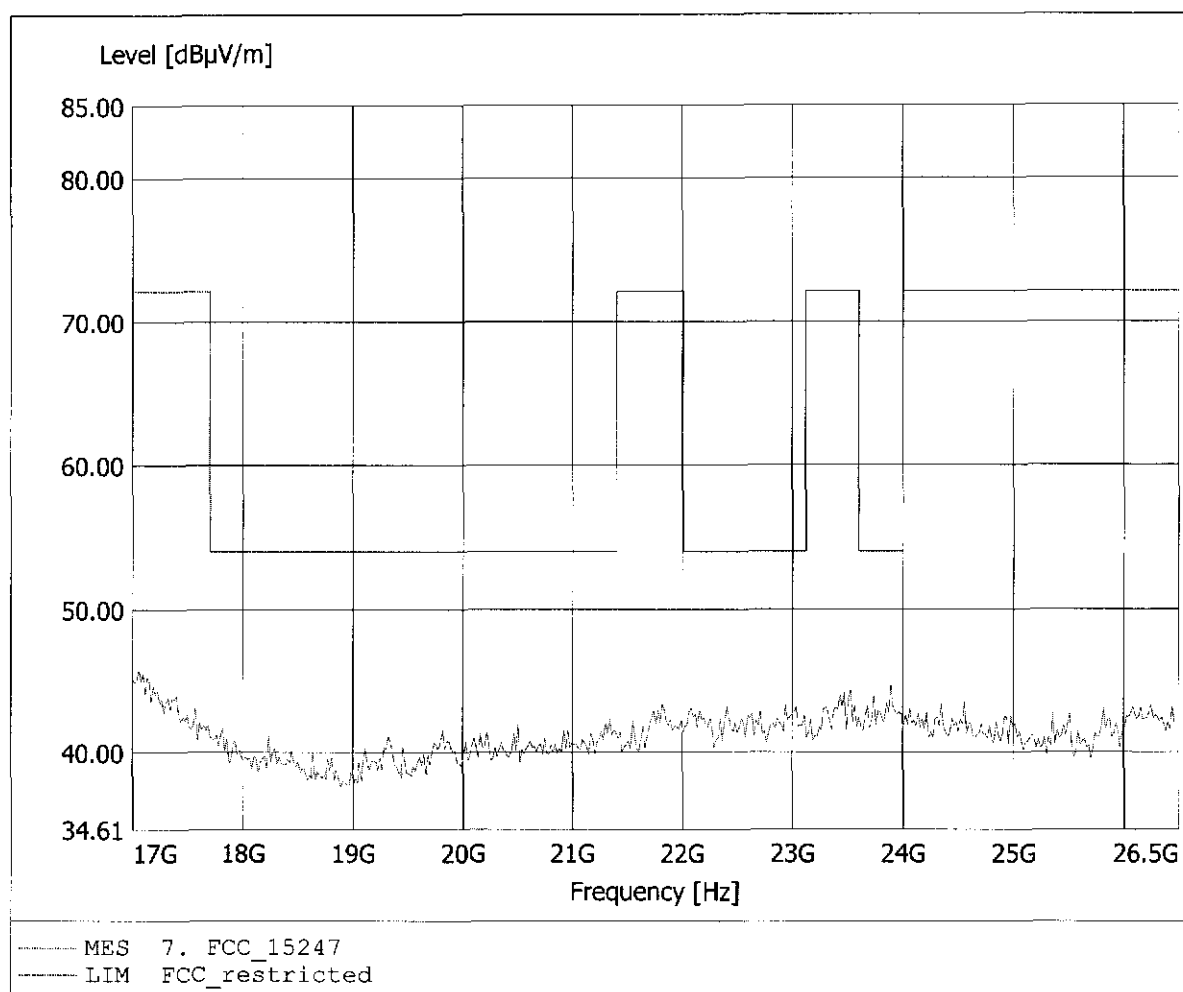

Appendix D


Spurious Emissions conducted - Transmitter operating

Appendix E

Carrier Frequency Separation



Delta 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl -0.20 dB VBW 100 kHz
10 dBm 1.02284569 MHz SWT 5 ms Unit dBm

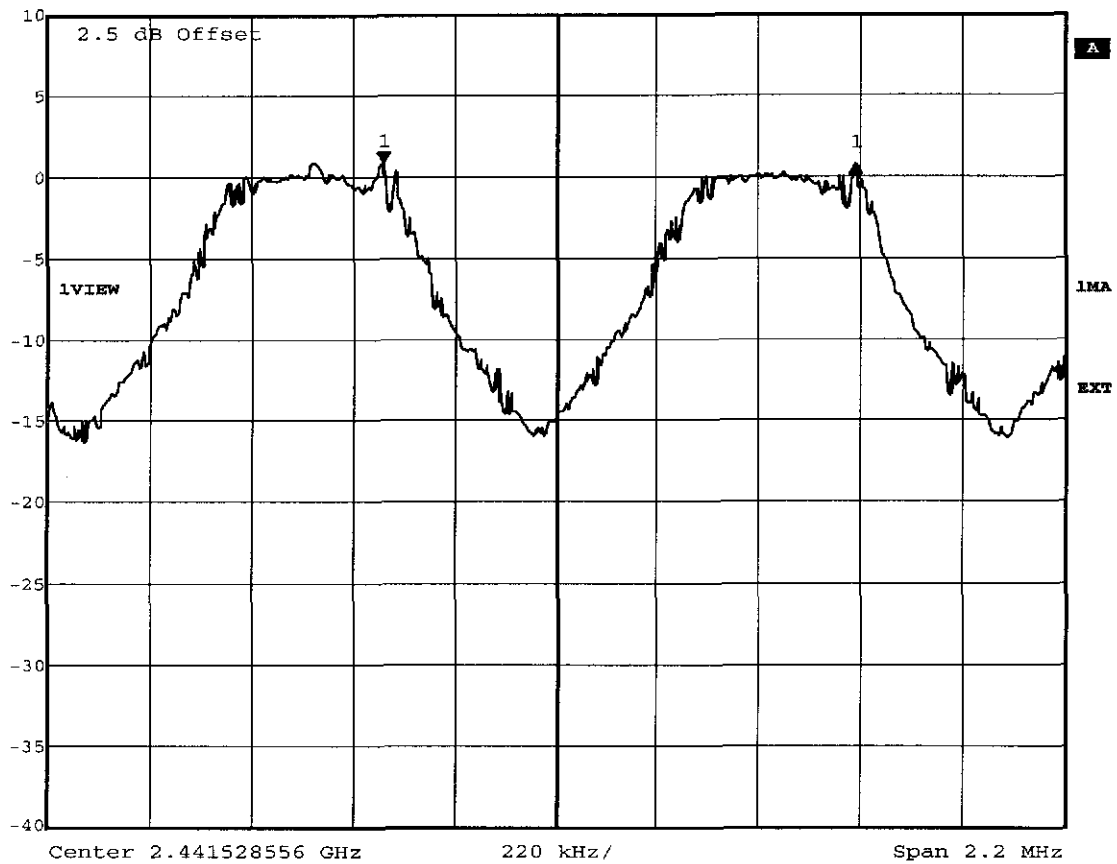

Title: Carrier Frequency Separation
Comment A: Jabra BT800
Date: 16.JUN.2004 09:06:59


Appendix F

Number of Hopping Frequencies



Ref Lvl
15 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

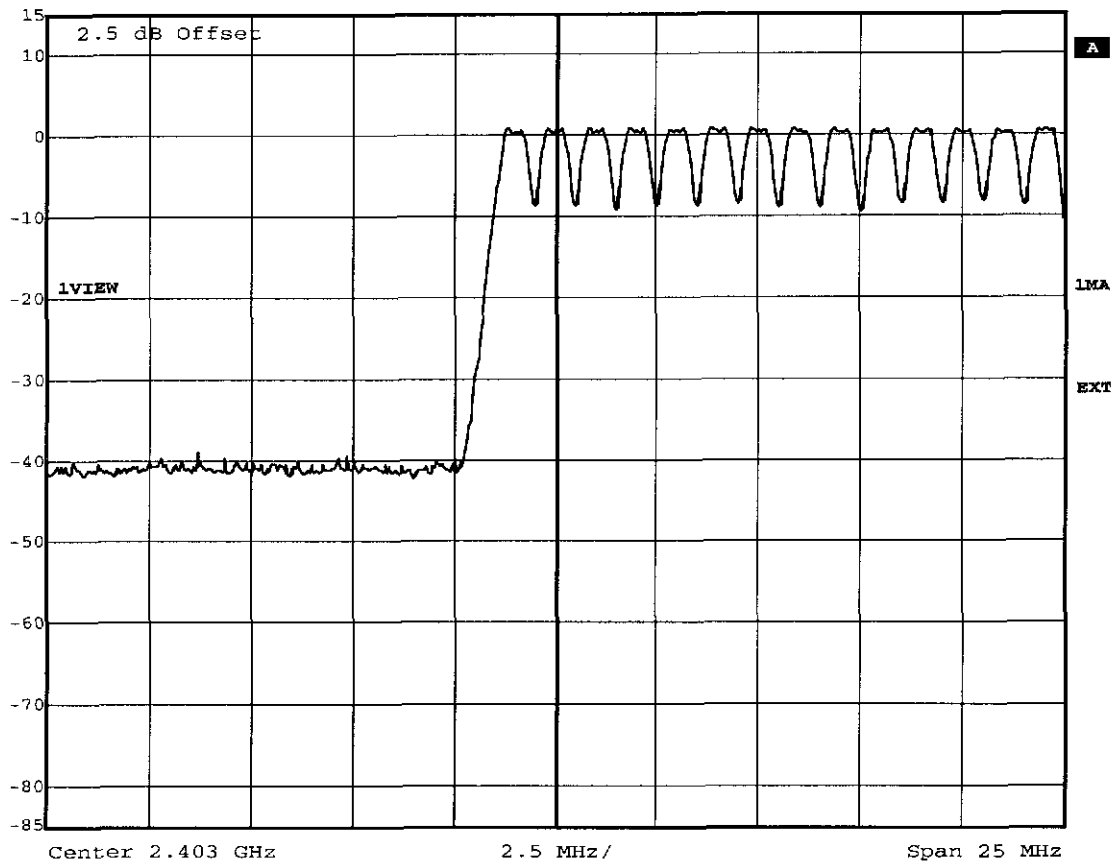


Title: Number of Hopping Frequencies Ch.: 0-13
Comment A: Jabra BT800
Date: 16.JUN.2004 09:20:13



Ref Lvl
15 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

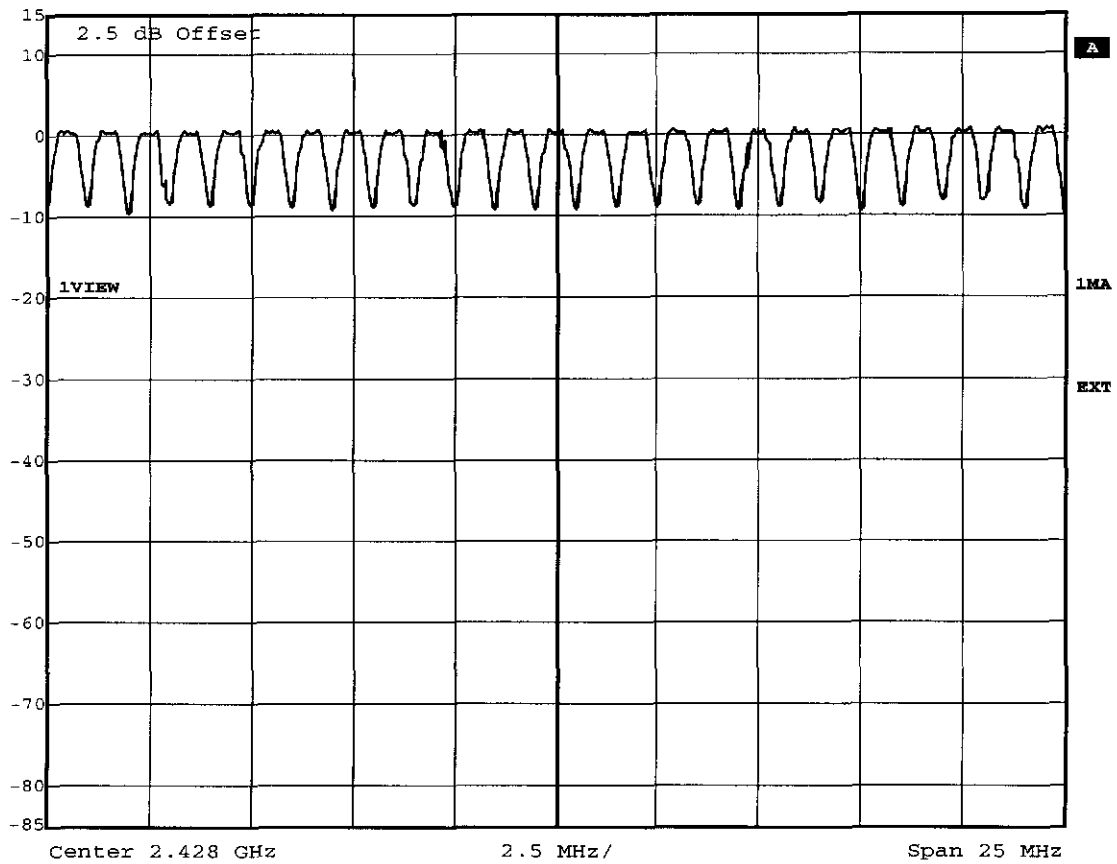


Title: Number of Hopping Frequencies Ch.: 14-38
Comment A: Jabra BT800
Date: 16.JUN.2004 09:22:30



Ref Lvl
15 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

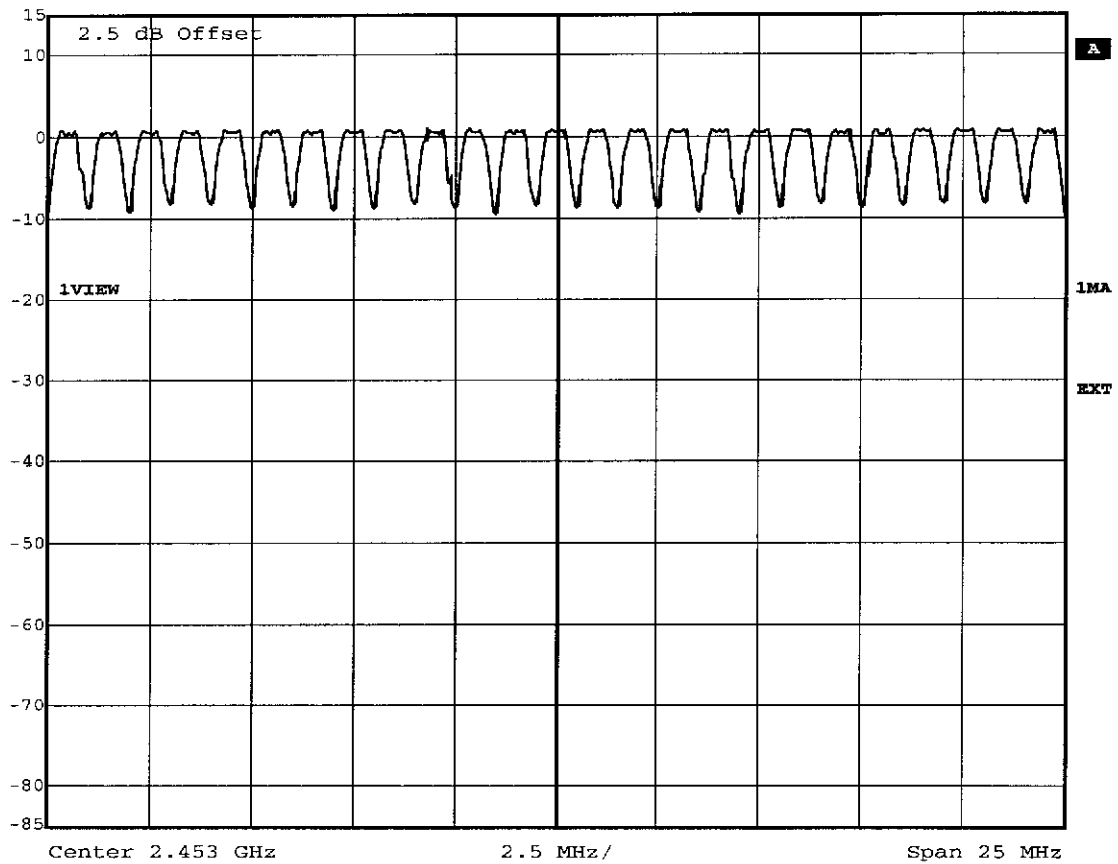


Title: Number of Hopping Frequencies Ch.: 39-63
Comment A: Jabra BT800
Date: 16.JUN.2004 09:24:45



Ref Lvl
15 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

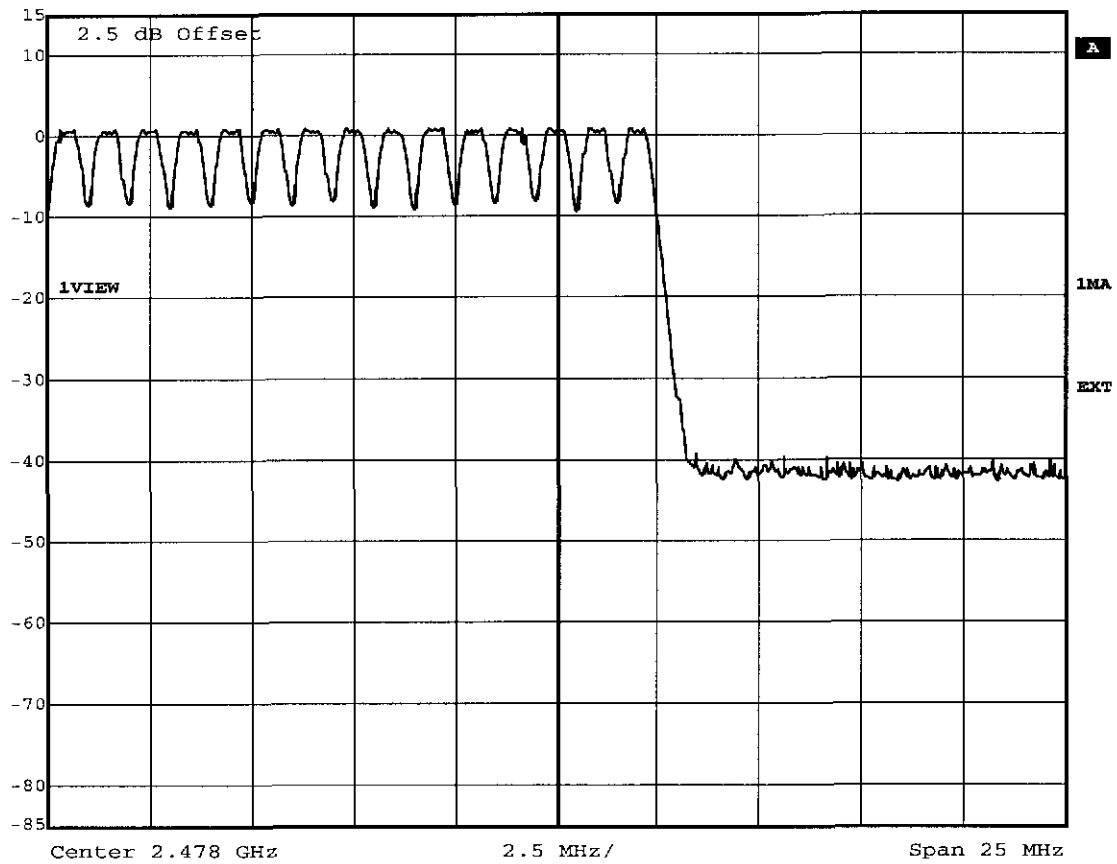


Title: Number of Hopping Frequencies Ch.: 64-78
Comment A: Jabra BT800
Date: 16.JUN.2004 09:26:42



Ref Lvl
15 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

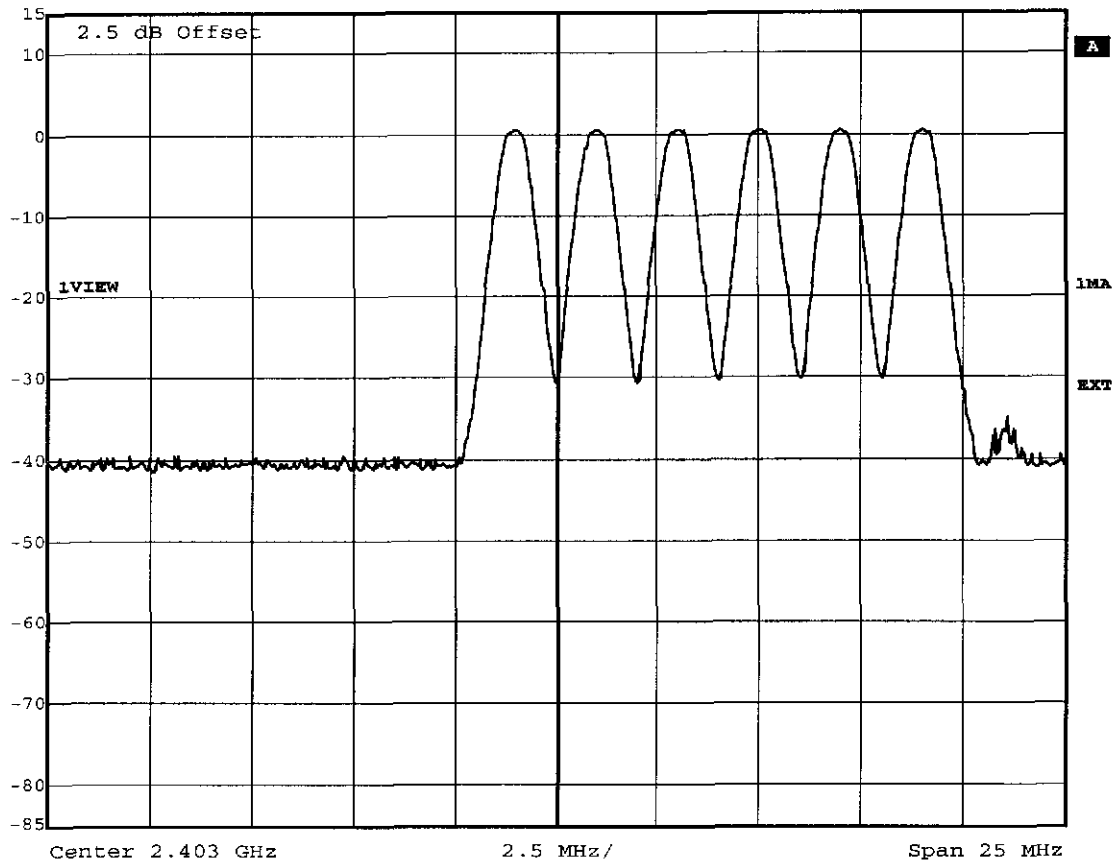


Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: Jabra BT800
Date: 16.JUN.2004 10:17:30



Ref Lvl
15 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

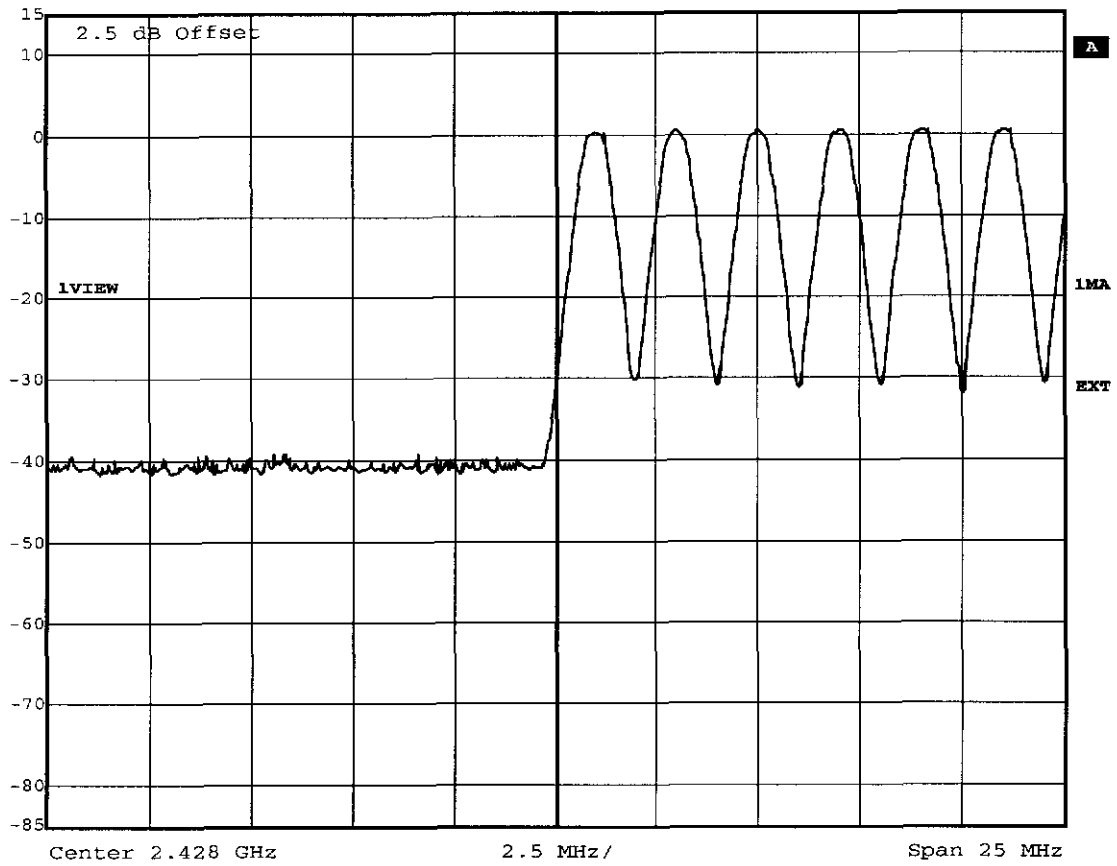


Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: Jabra BT800
Date: 16.JUN.2004 10:21:45



Ref Lvl
15 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

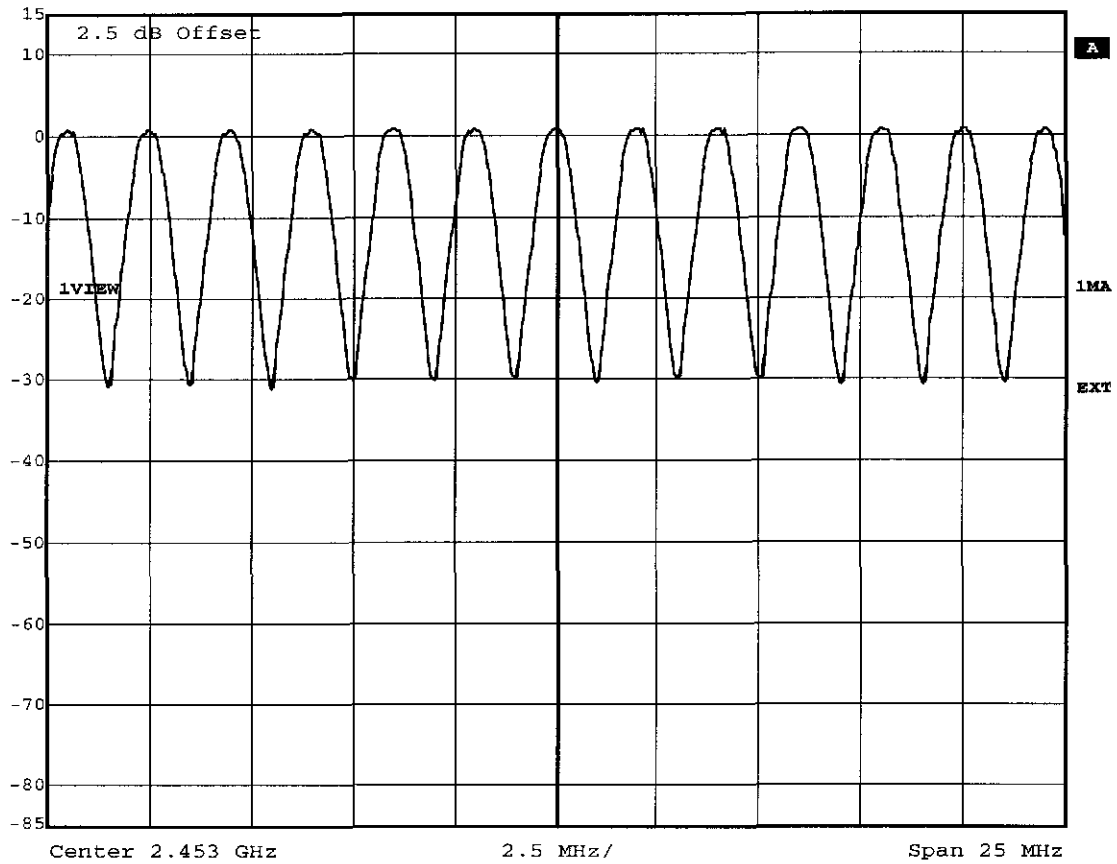


Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: Jabra BT800
Date: 16.JUN.2004 10:27:37



Ref Lvl
15 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

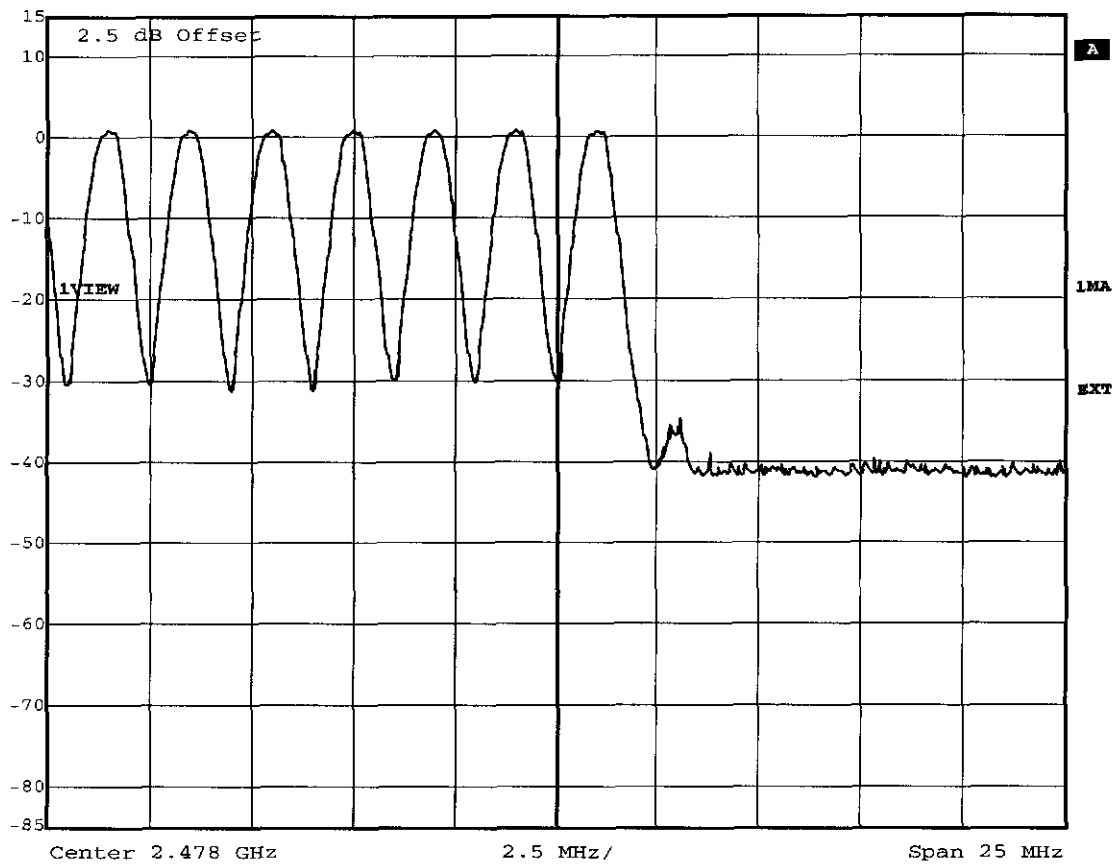


Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: Jabra BT800
Date: 16.JUN.2004 10:30:59

Appendix G

Time of Occupancy (Dwell Time)




Delta 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl -0.06 dB VBW 1 MHz
7.5 dBm 2.912689 ms SWT 5 ms Unit dBm

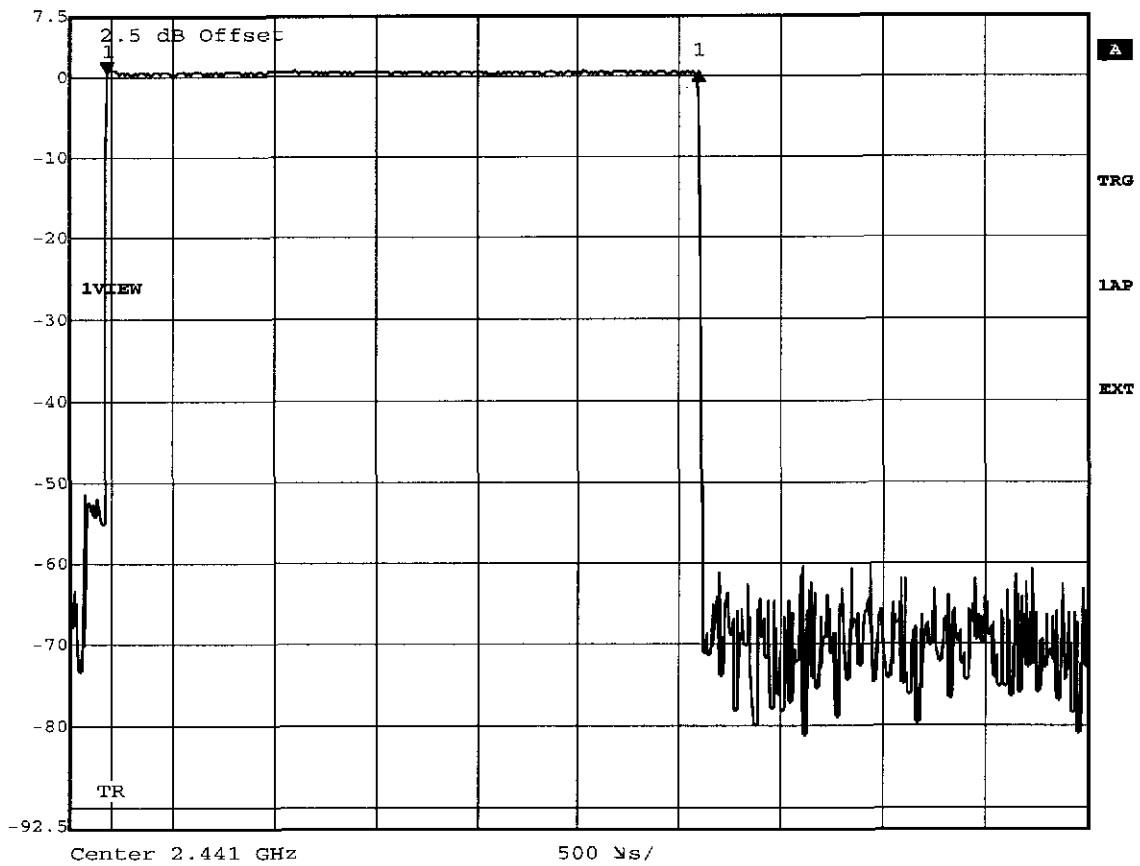

Title: Time of occupancy (Hopping DH5) 64 events * 2.913ms=186.43ms
Comment A: Jabra BT800
Date: 16.JUN.2004 09:11:00




Delta 1 [T1] RBW 1 MHz RF Att 30 dB
Ref Lvl -0.13 dB VBW 1 MHz
7.5 dBm 119.311824 μ s SWT 300 μ s Unit dBm

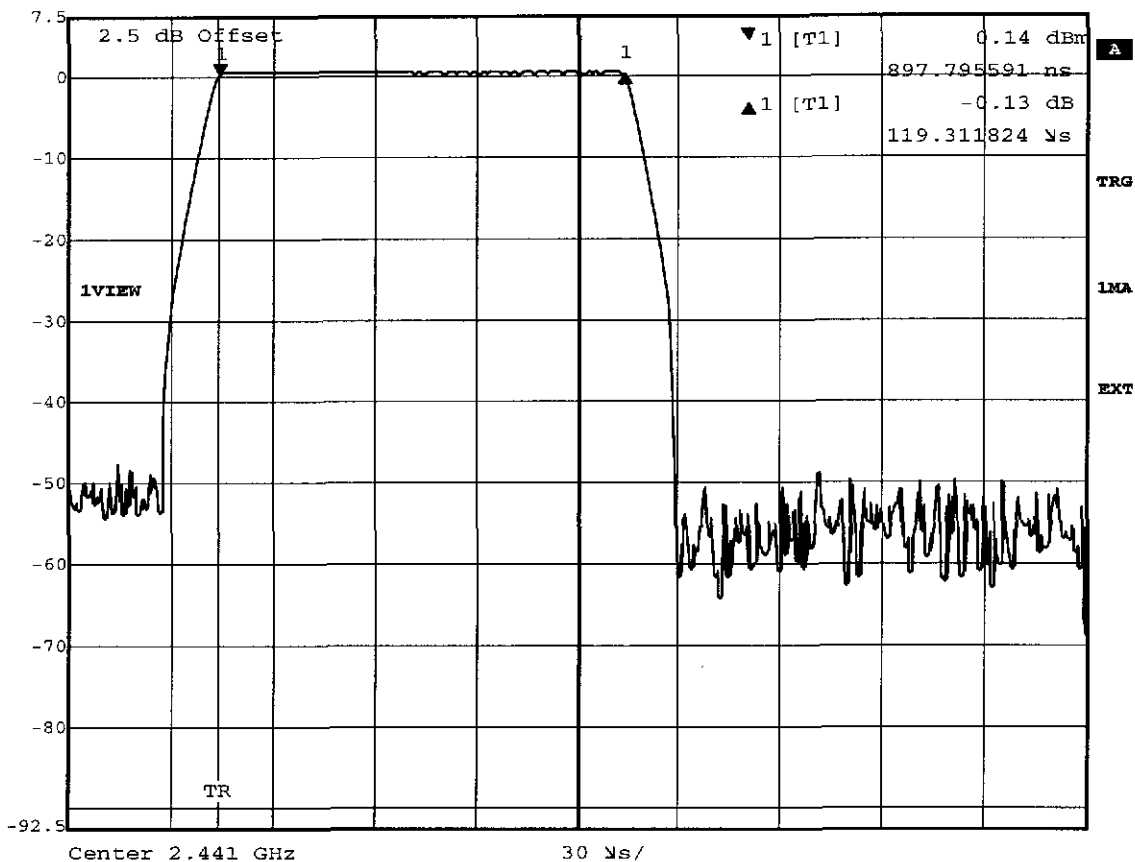

Title: Time of occupancy (Inquiry mode) 652 events * 0.119ms=77.6ms
Comment A: Jabra BT800
Date: 16.JUN.2004 10:35:18



Delta 2 [T1] RBW 1 MHz RF Att 40 dB
Ref Lvl -0.05 dB VBW 1 MHz
27 dBm 6.266333 ms SWT 11 ms Unit dBm

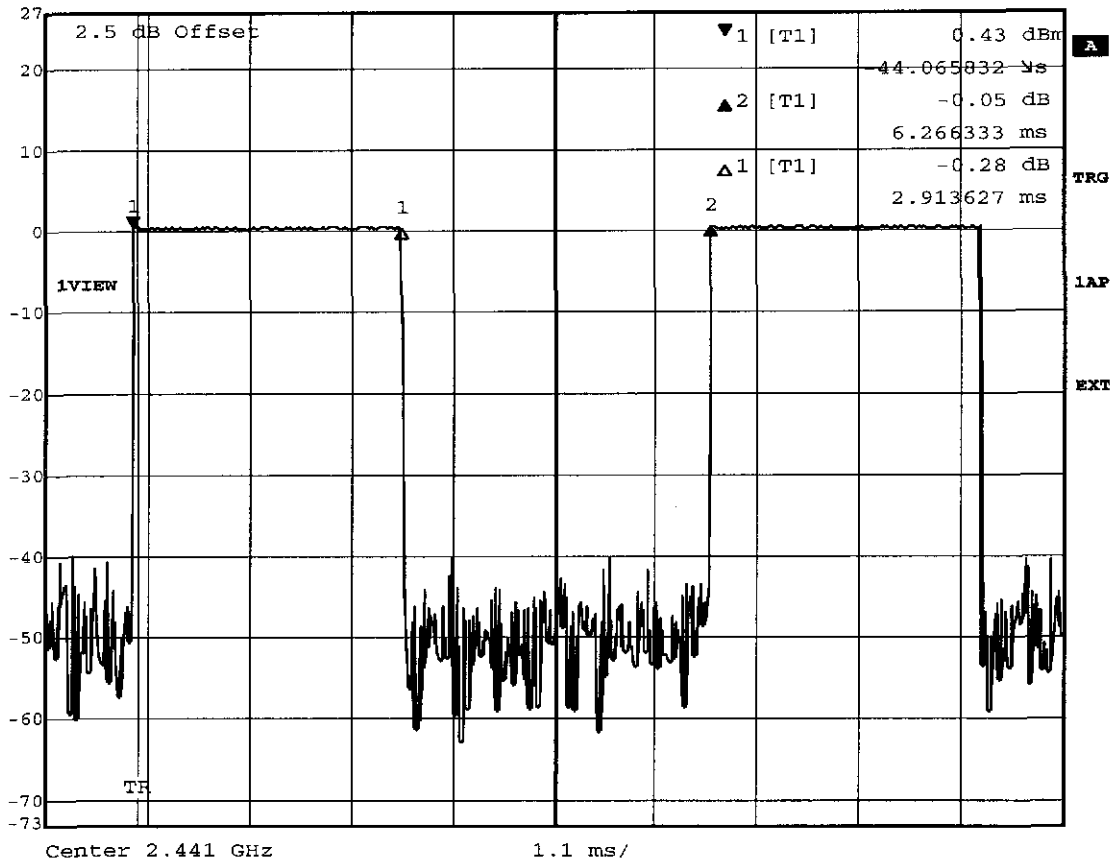


Title: Duty Cycle
Comment A: Jabra BT800
Date: 16.JUN.2004 08:15:03

Appendix H

20dB Bandwidth




Delta 1 [T1] RBW 10 kHz RF Att 40 dB
Ref Lvl -0.95 dB VBW 10 kHz
15 dBm 912.62525050 kHz SWT 56 ms Unit dBm

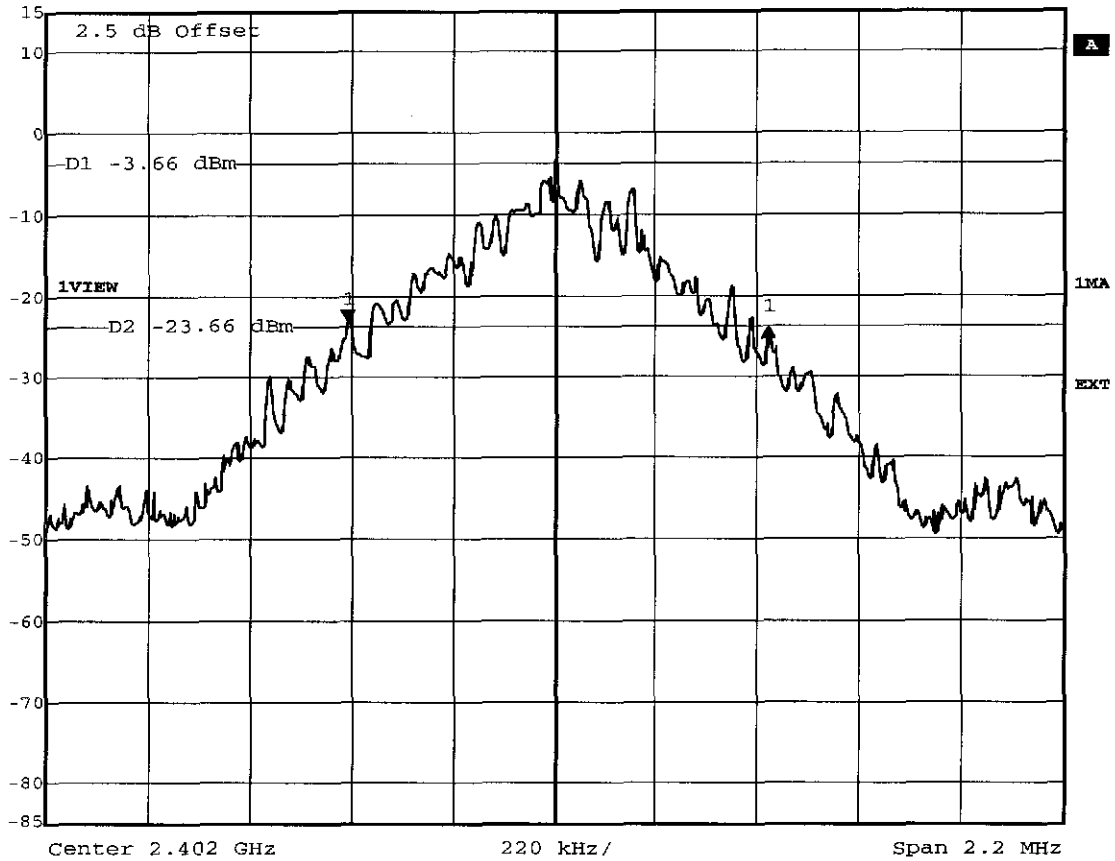

Title: -20dB Bandwidth Ch.: 0
Comment A: Jabra BT800
Date: 16.JUN.2004 07:48:29




Delta 1 [T1] RBW 10 kHz RF Att 40 dB
Ref Lvl 0.47 dB VBW 10 kHz
15 dBm 877.35470942 kHz SWT 56 ms Unit dBm

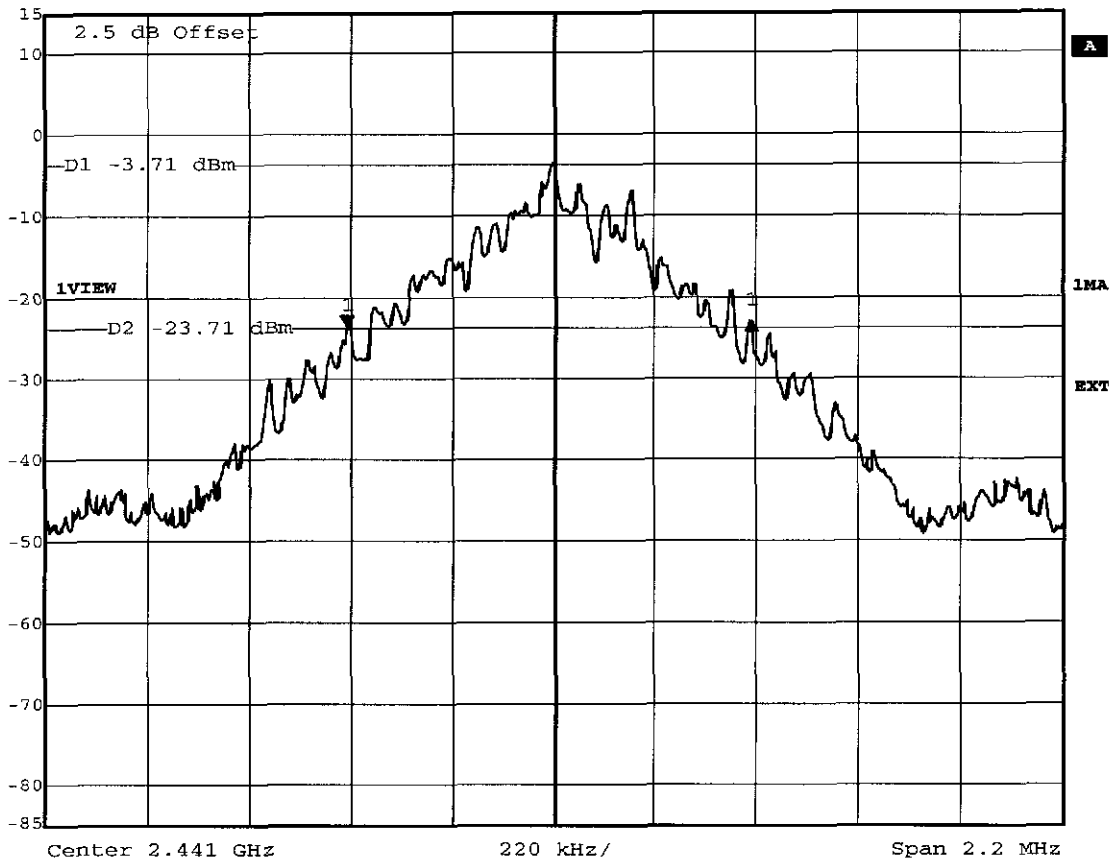

Title: -20dB Bandwidth Ch.: 39
Comment A: Jabra BT800
Date: 16.JUN.2004 07:45:51



Delta 1 [T1] RBW 10 kHz RF Att 40 dB
Ref Lvl -0.17 dB VBW 10 kHz
15 dBm 877.35470942 kHz SWT 56 ms Unit dBm

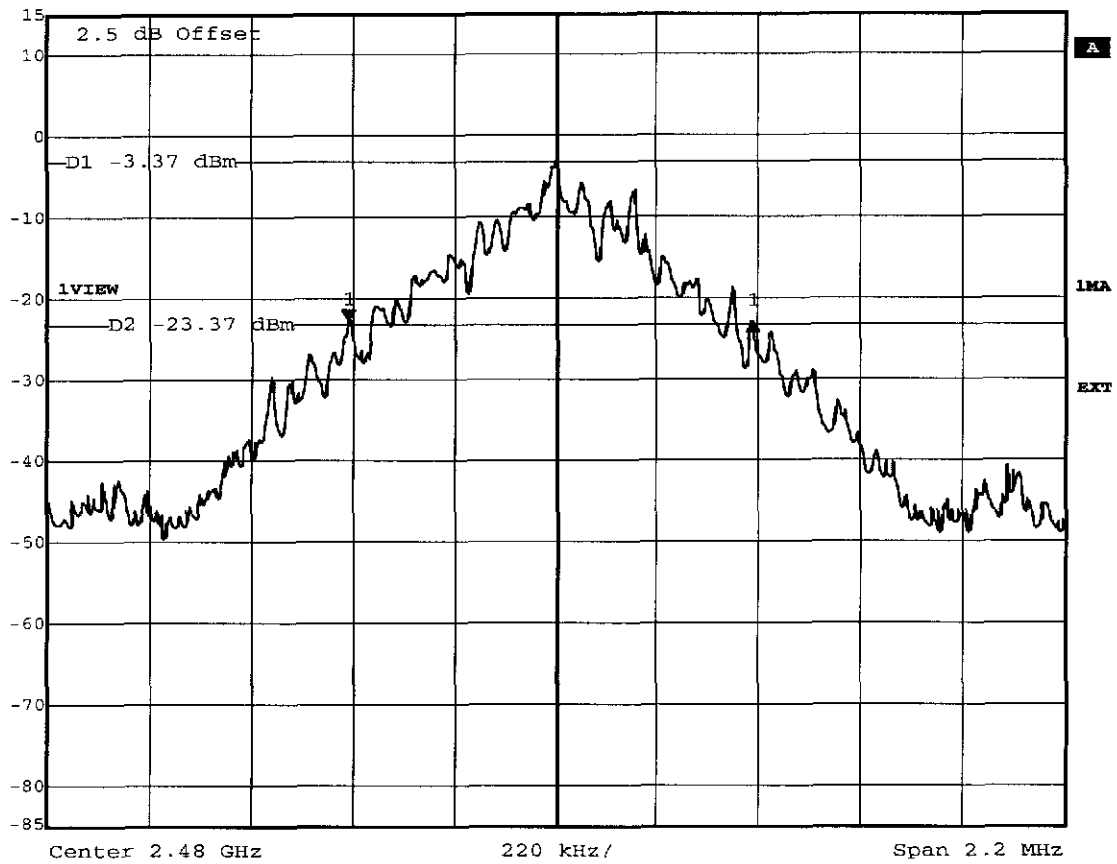


Title: -20dB Bandwidth Ch.: 78
Comment A: Jabra BT800
Date: 16.JUN.2004 07:44:26

Appendix I


Band-edge Compliance of RF Emissions



Delta 1 [T1] RBW 50 kHz RF Att 40 dB
Ref Lvl 43.88 dB VBW 50 kHz
20 dBm 2.01102204 MHz SWT 5 ms Unit dBm

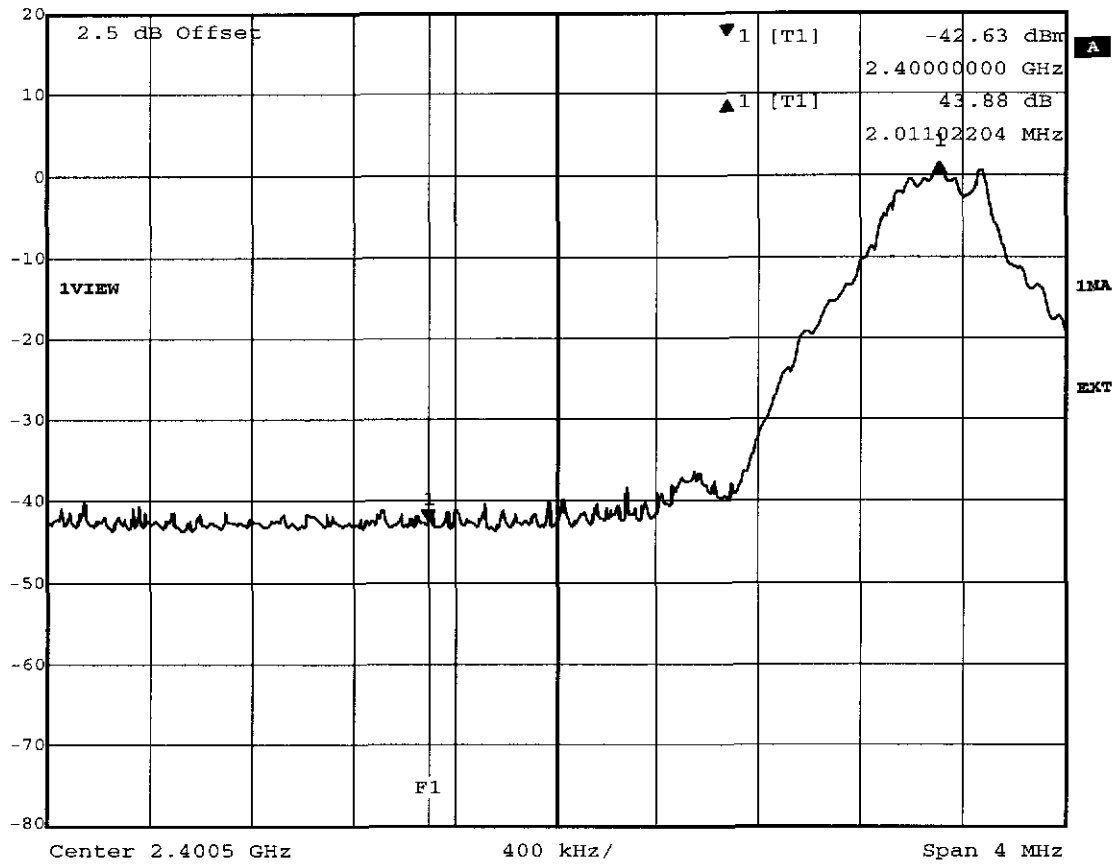


Title: Band-edge Compliance (conducted, single frequency)
Comment A: Jabra BT800
Date: 16.JUN.2004 08:45:44



Title: Band-edge Compliance (conducted, single frequency)
Comment A: Jabra BT800
Date: 16.JUN.2004 08:55:38




Delta 1 [T1] RBW 50 kHz RF Att 40 dB
Ref Lvl 41.53 dB VBW 50 kHz
20 dBm 2.17743487 MHz SWT 5 ms Unit dBm

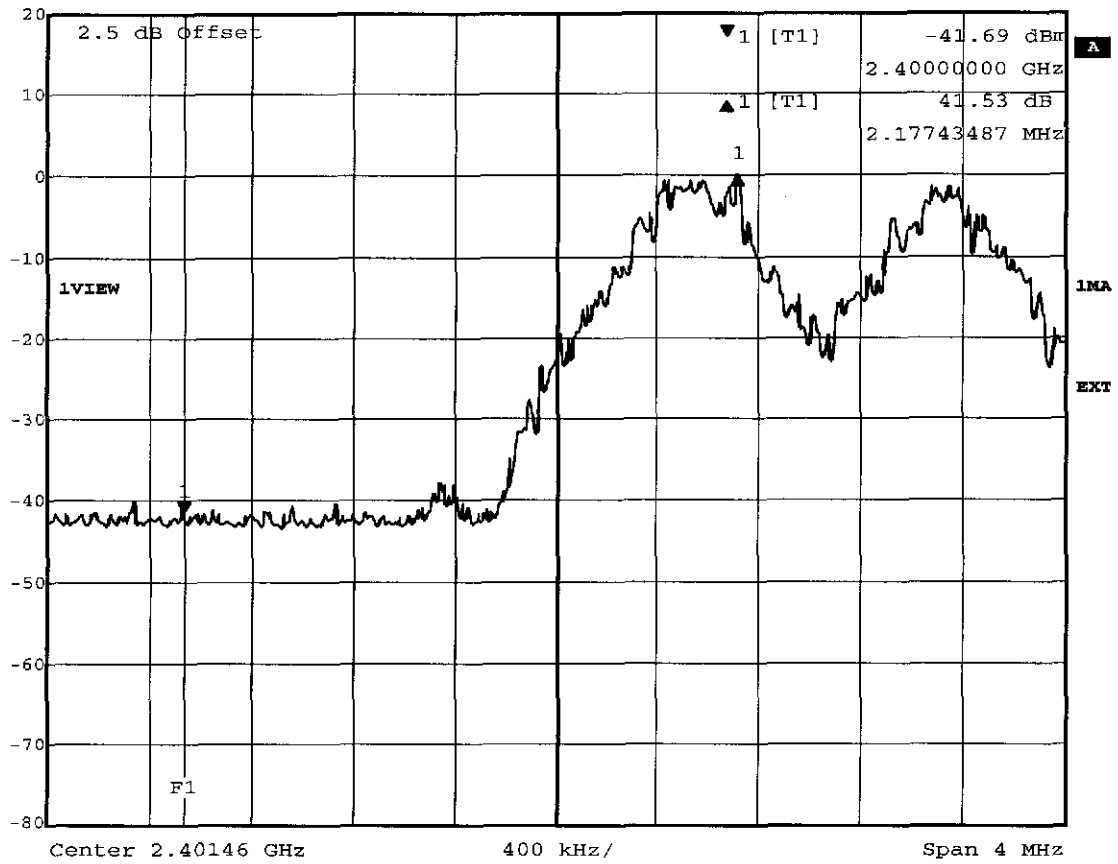

Title: Band-edge Compliance (conducted, hopping mode)
Comment A: Jabra BT800
Date: 16.JUN.2004 08:59:09



Delta 1 [T1] RBW 50 kHz RF Att 40 dB
Ref Lvl 40.62 dB VBW 50 kHz
20 dBm -3.43735471 MHz SWT 5 ms Unit dBm

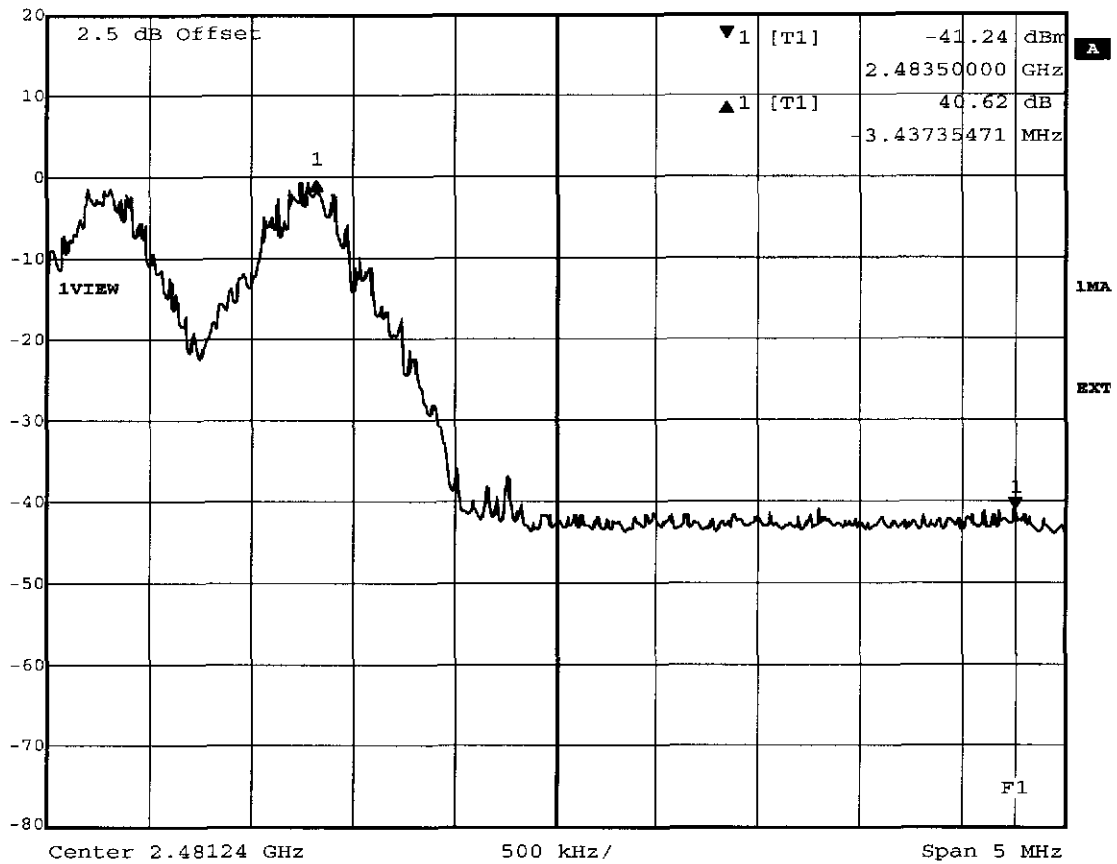


Title: Band-edge Compliance (conducted, hopping mode)
Comment A: Jabra BT800
Date: 16.JUN.2004 08:41:50

Appendix J

Conducted Measurement at (AC) Power Line


EMI voltage test in the ac-mains according to FCC part 15

EUT: BLUETOOTH HEADSET
Manufacturer: GN NETCOM
Operating Condition: Unom: 120VAC(AC/DC-adaptor), Thom: 23°C
Test Site: ETS
Operator: Mr. Pflug
Test Specification: V-Network: ESH2-Z5 (N)
Comment: model: JABRA BT 800 mode: link
(power supply FW7600/06)

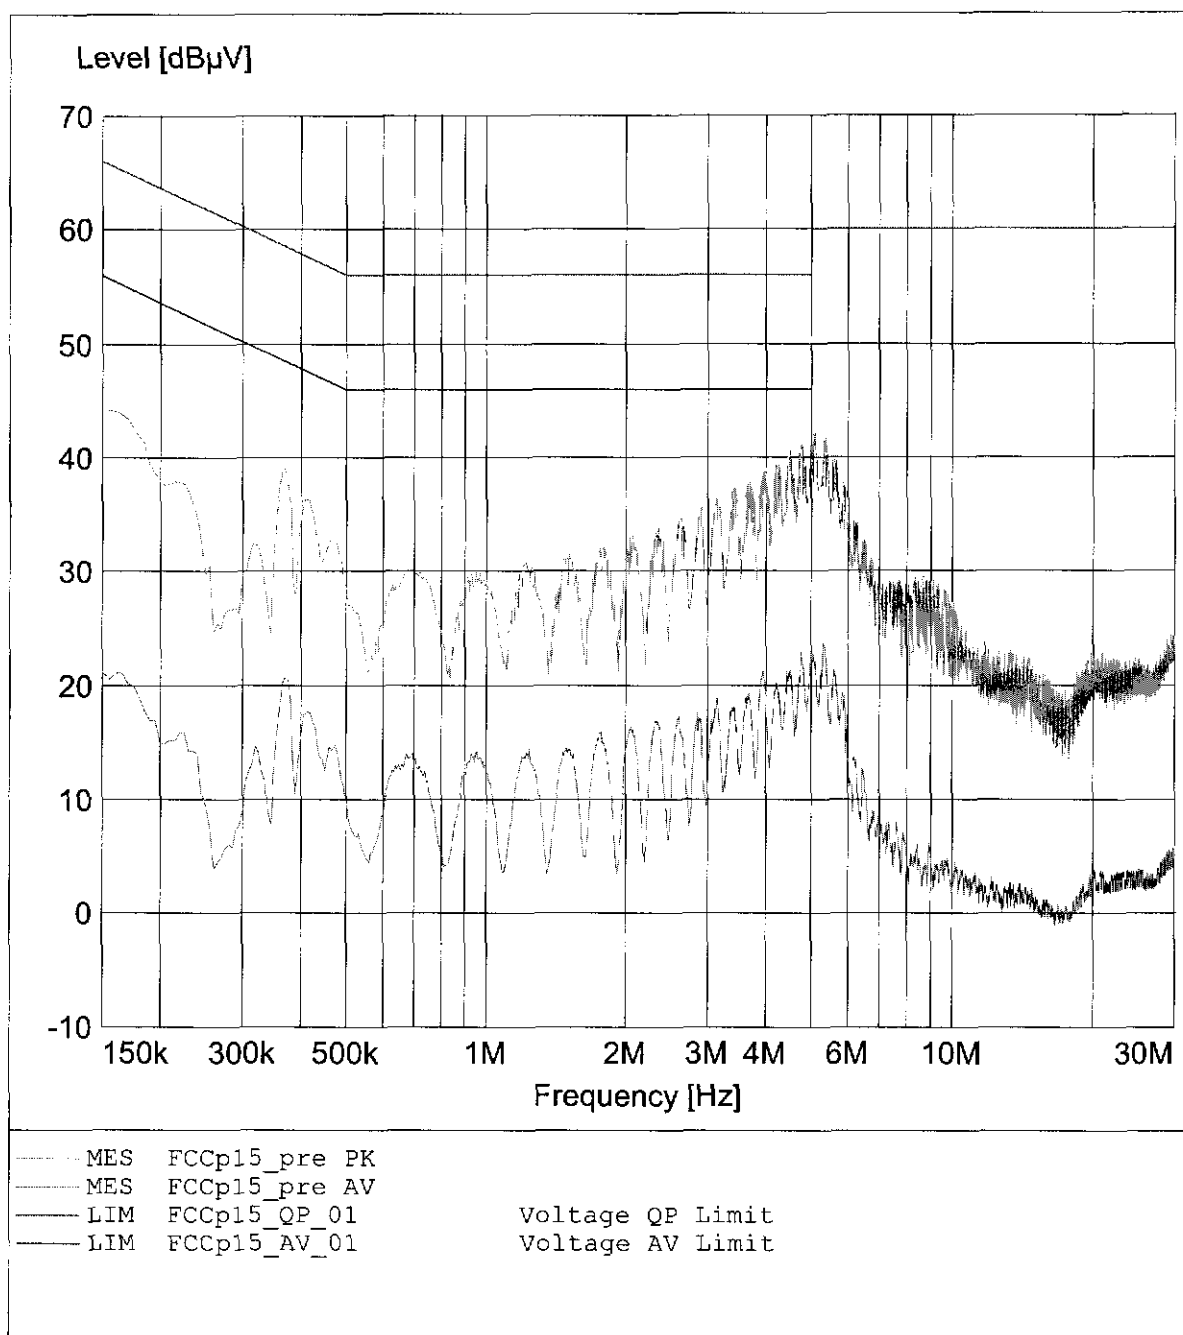


EMI voltage test in the ac-mains according to FCC part 15

EUT: BLUETOOTH HEADSET
Manufacturer: GN NETCOM
Operating Condition: Unom: 120VAC (AC/DC-adaptor), Thom: 23°C
Test Site: ETS
Operator: Mr. Pflug
Test Specification: V-Network: ESH2-Z5 (L1)
Comment: model: JABRA BT 800 mode: charging
(power supply FW7600/06)

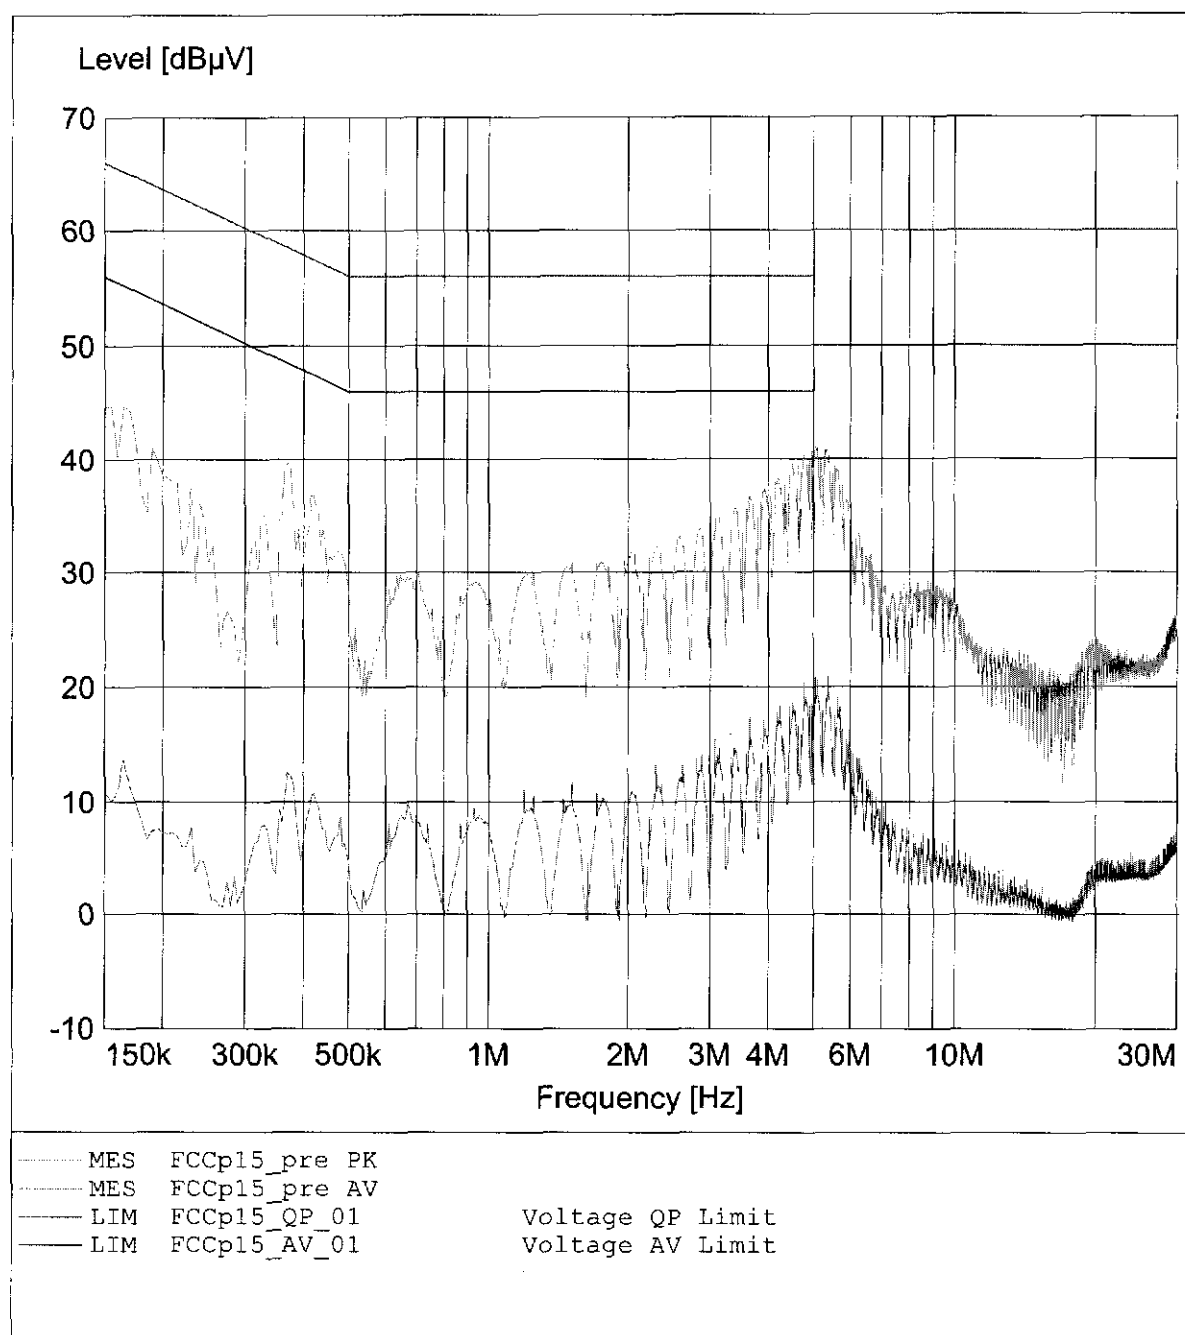

EMI voltage test in the ac-mains according to FCC part 15

EUT: BLUETOOTH HEADSET
Manufacturer: GN NETCOM
Operating Condition: Unom: 120VAC (AC/DC-adaptor), Tnom: 23°C
Test Site: ETS
Operator: Mr. Pflug
Test Specification: V-Network: ESH2-Z5 (N)
Comment: model: JABRA BT 800 mode: charging
(power supply FW7600/06)

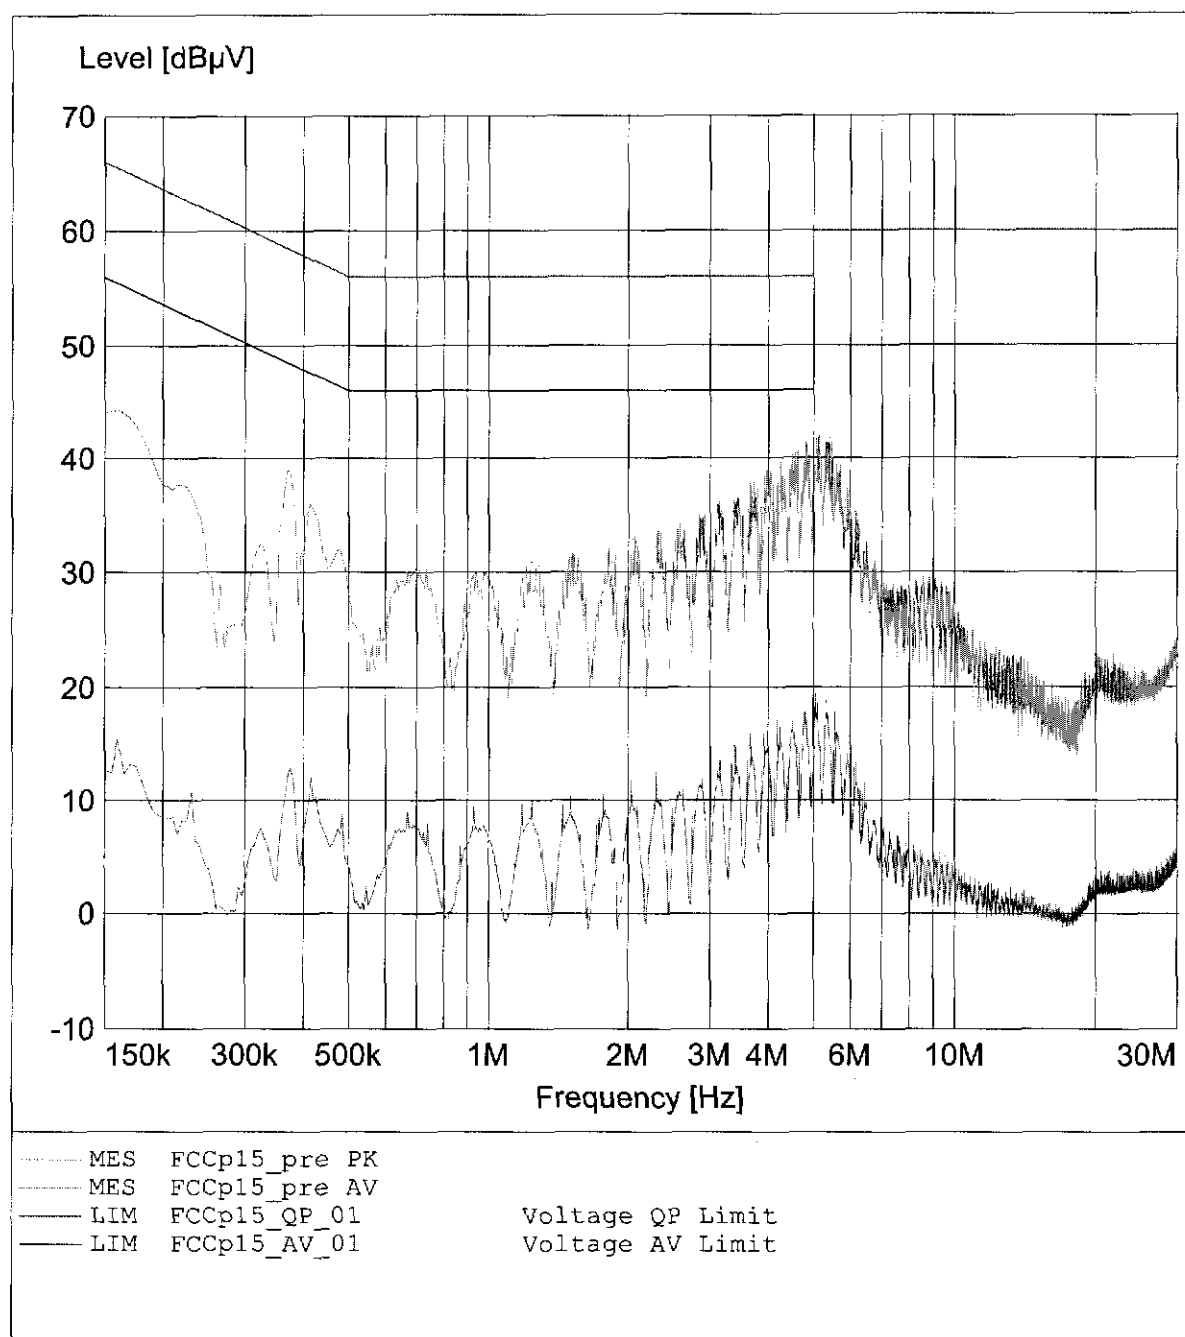

EMI voltage test in the ac-mains according to FCC part 15

EUT: BLUETOOTH HEADSET
Manufacturer: GN NETCOM
Operating Condition: Unom: 120VAC (AC/DC-adaptor), Tnom: 23°C
Test Site: ETS
Operator: Mr. Pflug
Test Specification: V-Network: ESH2-Z5 (L1)
Comment: model: JABRA BT 800 mode: link
(power supply FW7600/06)

