

FCC Test Report

Product Name	Bluetooth Headset
Model No.	HSC100W
FCC ID.	BCE-HSC100W

Applicant	GN Audio A/S
Address	Lautrupbjerg 7,DK-2750 Ballerup,Denmark.

Date of Receipt	Jun. 22, 2018
Issued Date	Jul. 02, 2018
Report No.	1860331R-RFUSP01V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Test Report

Issued Date: Jul. 02, 2018

Report No.: 1860331R-RFUSP01V00




Product Name	Bluetooth Headset
Applicant	GN Audio A/S
Address	Lautrupbjerg 7,DK-2750 Ballerup,Denmark.
Manufacturer	GN Audio A/S
Model No.	HSC100W
FCC ID.	BCE-HSC100W
EUT Rated Voltage	DC 3.8V (Power by Battery) or DC 5V (Power by USB)
EUT Test Voltage	DC 5V (Power by USB)
Trade Name	Jabra
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2017 ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By :



(Senior Adm. Specialist / Jinn Chen)

Tested By :



(Senior Engineer / Ivan Chuang)

Approved By :



(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description.....	5
1.2. Operational Description.....	7
1.3. Tested System Details.....	8
1.4. Configuration of Tested System	8
1.5. EUT Exercise Software	8
1.6. Test Facility	9
1.7. List of Test Equipment.....	10
2. CONDUCTED EMISSION	11
2.1. Test Setup	11
2.2. Limits.....	11
2.3. Test Procedure	12
2.4. Uncertainty	12
2.5. Test Result of Conducted Emission.....	13
3. PEAK POWER OUTPUT	15
3.1. Test Setup	15
3.2. Limit	15
3.3. Test Procedure	15
3.4. Uncertainty	15
3.5. Test Result of Peak Power Output	16
4. RADIATED EMISSION	19
4.1. Test Setup	19
4.2. Limits.....	20
4.3. Test Procedure	21
4.4. Uncertainty	21
4.5. Test Result of Radiated Emission	22
5. RF ANTENNA CONDUCTED TEST	30
5.1. Test Setup	30
5.2. Limits.....	30
5.3. Test Procedure	30
5.4. Uncertainty	30
5.5. Test Result of RF Antenna Conducted Test	31
6. BAND EDGE	33
6.1. Test Setup	33
6.2. Limit	34
6.3. Test Procedure	34
6.4. Uncertainty	34
6.5. Test Result of Band Edge	35
7. CHANNEL NUMBER.....	47
7.1. Test Setup	47
7.2. Limit	47
7.3. Test Procedure	47
7.4. Uncertainty	47
7.5. Test Result of Channel Number.....	48
8. CHANNEL SEPARATION.....	50
8.1. Test Setup	50
8.2. Limit	50
8.3. Test Procedure	50
8.4. Uncertainty	50
8.5. Test Result of Channel Separation.....	51
9. DWELL TIME	55
9.1. Test Setup	55
9.2. Limit	55
9.3. Test Procedure	55
9.4. Uncertainty	55
9.5. Test Result of Dwell Time	56
10. OCCUPIED BANDWIDTH	60
10.1. Test Setup	60

10.2.	Limits.....	60
10.3.	Test Procedure	60
10.4.	Uncertainty	60
10.5.	Test Result of Occupied Bandwidth	61
11.	EMI REDUCTION METHOD DURING COMPLIANCE TESTING	67
Attachment 1: EUT Test Photographs		
Attachment 2: EUT Detailed Photographs		

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	Bluetooth Headset
Trade Name	Jabra
Model No.	HSC100W
FCC ID.	BCE-HSC100W
Frequency Range	2402 – 2480MHz
Channel Number	79
Type of Modulation	FHSS: GFSK(1Mbps) / π / 4DQPSK(2Mbps) / 8DPSK(3Mbps)
Antenna Type	Patch Antenna
Channel Control	Auto
Antenna Gain	Refer to the table “Antenna List”
USB Cable	Non-shielded, 1.5m

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	Jabra	HSC100W	Patch Antenna	-2.85 dBi for 2.4 GHz

Note: The antenna of EUT is conforming to FCC 15.203.

Center Frequency of Each Channel: (For V2.1+EDR)

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 20:	2422 MHz	Channel 40:	2442 MHz	Channel 60:	2462 MHz
Channel 01:	2403 MHz	Channel 21:	2423 MHz	Channel 41:	2443 MHz	Channel 61:	2463 MHz
Channel 02:	2404 MHz	Channel 22:	2424 MHz	Channel 42:	2444 MHz	Channel 62:	2464 MHz
Channel 03:	2405 MHz	Channel 23:	2425 MHz	Channel 43:	2445 MHz	Channel 63:	2465 MHz
Channel 04:	2406 MHz	Channel 24:	2426 MHz	Channel 44:	2446 MHz	Channel 64:	2466 MHz
Channel 05:	2407 MHz	Channel 25:	2427 MHz	Channel 45:	2447 MHz	Channel 65:	2467 MHz
Channel 06:	2408 MHz	Channel 26:	2428 MHz	Channel 46:	2448 MHz	Channel 66:	2468 MHz
Channel 07:	2409 MHz	Channel 27:	2429 MHz	Channel 47:	2449 MHz	Channel 67:	2469 MHz
Channel 08:	2410 MHz	Channel 28:	2430 MHz	Channel 48:	2450 MHz	Channel 68:	2470 MHz
Channel 09:	2411 MHz	Channel 29:	2431 MHz	Channel 49:	2451 MHz	Channel 69:	2471 MHz
Channel 10:	2412 MHz	Channel 30:	2432 MHz	Channel 50:	2452 MHz	Channel 70:	2472 MHz
Channel 11:	2413 MHz	Channel 31:	2433 MHz	Channel 51:	2453 MHz	Channel 71:	2473 MHz
Channel 12:	2414 MHz	Channel 32:	2434 MHz	Channel 52:	2454 MHz	Channel 72:	2474 MHz
Channel 13:	2415 MHz	Channel 33:	2435 MHz	Channel 53:	2455 MHz	Channel 73:	2475 MHz
Channel 14:	2416 MHz	Channel 34:	2436 MHz	Channel 54:	2456 MHz	Channel 74:	2476 MHz
Channel 15:	2417 MHz	Channel 35:	2437 MHz	Channel 55:	2457 MHz	Channel 75:	2477 MHz
Channel 16:	2418 MHz	Channel 36:	2438 MHz	Channel 56:	2458 MHz	Channel 76:	2478 MHz
Channel 17:	2419 MHz	Channel 37:	2439 MHz	Channel 57:	2459 MHz	Channel 77:	2479 MHz
Channel 18:	2420 MHz	Channel 38:	2440 MHz	Channel 58:	2460 MHz	Channel 78:	2480 MHz
Channel 19:	2421 MHz	Channel 39:	2441 MHz	Channel 59:	2461 MHz		

Note:

1. The EUT is a Bluetooth Headset with built-in Bluetooth V4.0 、 V2.1+EDR transceiver, this report for Bluetooth V2.1+EDR.
2. These tests were conducted on a sample for the purpose of demonstrating compliance of Bluetooth V2.1+EDR transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
4. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.
5. Bluetooth operation was evaluated at both 1Mb/s and 3Mb/s data rates. 2Mb/s data rate was found, through pre-testing, to produce emissions similar to those for 3Mb/s.

Test Mode	Mode 1: Transmit - 1Mbps Mode 2: Transmit - 2Mbps Mode 3: Transmit - 3Mbps
-----------	--


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook PC	DELL	P62G	CY9FJC2	N/A

Signal Cable Type		Signal cable Description
A	USB Cable	Non-Shielded, 1.5m

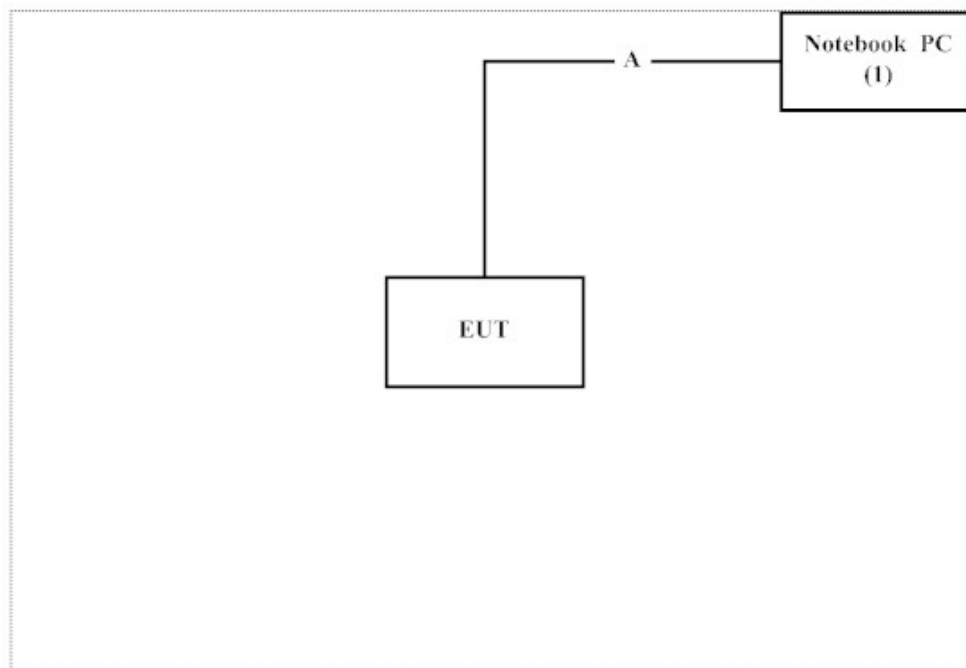1.4. Configuration of Tested System



1.5. EUT Exercise Software

1. Setup the EUT as shown in Section 1.4.
2. Execute software “Blue Test 3 v2.5.0” on the Notebook PC .
3. Configure the test mode, the test channel, and the data rate.
4. Press “OK” to start the continuous Transmit.
5. Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from DEKRA Testing and Certification Co., Ltd. Web Site:

<http://www.dekra.com.tw/english/about/certificates.aspx?bval=5>

The address and introduction of DEKRA Testing and Certification Co., Ltd. laboratories can be founded in our Web site: http://www.dekra.com.tw/index_en

Site Description: Accredited by TAF
Accredited Number: 3023

Site Name: DEKRA Testing and Certification Co., Ltd.
Site Address: No.159, Sec. 2, Wenhua 1st Rd., Linkou Dist.,
New Taipei City 24457, Taiwan.
TEL: 886-2-2602-7968 / FAX : 866-2-2602-3286
E-Mail : info.tw@dekra.com

FCC Accreditation Number: TW0023

1.7. List of Test Equipment

For Conduction measurements /ASR1

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	EMI Test Receiver	R&S	ESR7	101601	2018.02.08	2019.02.07
X	Two-Line V-Network	R&S	ENV216	101306	2018.03.09	2019.03.08
X	Two-Line V-Network	R&S	ENV216	101307	2018.03.20	2019.03.19
X	Coaxial Cable	Quietek	RG400_BNC	RF001	2018.05.24	2019.05.23

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : QuieTek EMI 2.0 V2.1.113

For Conducted measurements /ASR4

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Spectrum Analyzer	R&S	FSV30	103464	2018.01.23	2019.01.22
X	Power Meter	Anritsu	ML2496A	1548003	2017.12.11	2018.12.10
X	Power Sensor	Anritsu	MA2411B	1531024	2017.12.11	2018.12.10
X	Power Sensor	Anritsu	MA2411B	1531025	2017.12.11	2018.12.10
	Bluetooth Tester	R&S	CBT	101238	2018.01.18	2019.01.17

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Conduction Test System V9.0.1

For Radiated measurements /ACB1


	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Loop Antenna	AMETEK	HLA6121	49611	2018.01.26	2019.01.25
X	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-674	2018.04.02	2019.04.01
X	Horn Antenna	ETS-Lindgren	3117	00203800	2017.11.10	2018.11.09
X	Horn Antenna	Com-Power	AH-840	101087	2018.06.01	2019.05.31
X	Pre-Amplifier	EMCI	EMC001330	980316	2018.06.01	2019.05.31
X	Pre-Amplifier	EMCI	EMC051835SE	980311	2018.06.04	2019.06.03
X	Pre-Amplifier	EMCI	EMC05820SE	980310	2018.06.04	2019.06.03
X	Pre-Amplifier	EMCI	EMC184045SE	980314	2018.05.16	2019.05.15
X	Filter	MICRO TRONICS	BRM50702	G251	2017.08.30	2018.08.29
	Filter	MICRO TRONICS	BRM50716	G188	2017.08.30	2018.08.29
X	EMI Test Receiver	R&S	ESR7	101602	2017.12.11	2018.12.10
X	Spectrum Analyzer	R&S	FSV40	101148	2018.02.08	2019.02.07
X	Coaxial Cable	SUHNER	SUCOFLEX 106	RF002	2018.05.25	2019.05.24

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : QuieTek EMI 2.0 V2.1.113

2. Conducted Emission

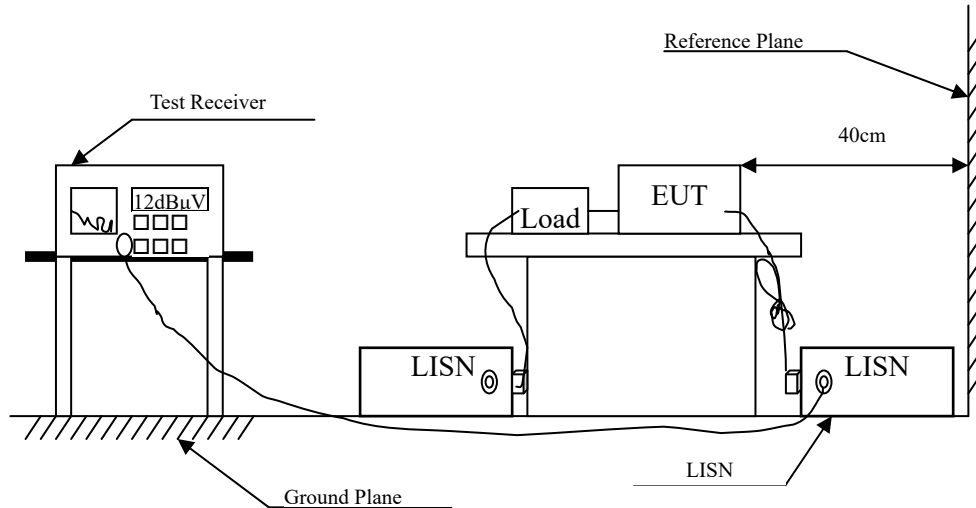2.1. Test Setup



2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dB μ V) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.3. Test Procedure

The EUT and Peripherals are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

2.4. Uncertainty

$\pm 2.35\text{dB}$

2.5. Test Result of Conducted Emission

Product : Bluetooth Headset
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 3: Transmit - 3Mbps (2441MHz)
 Test Date : 2018/06/25

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V	Margin dB	Limit dB μ V
LINE 1					
Quasi-Peak					
0.160	9.633	37.300	46.934	-18.780	65.714
0.280	9.685	27.507	37.193	-25.093	62.286
0.430	9.695	27.904	37.599	-20.401	58.000
2.300	9.763	21.988	31.751	-24.249	56.000
3.000	9.780	19.043	28.823	-27.177	56.000
17.080	10.050	18.987	29.037	-30.963	60.000
Average					
0.160	9.633	22.661	32.294	-23.420	55.714
0.280	9.685	18.780	28.465	-23.821	52.286
0.430	9.695	15.380	25.075	-22.925	48.000
2.300	9.763	15.889	25.652	-20.348	46.000
3.000	9.780	12.437	22.217	-23.783	46.000
17.080	10.050	7.493	17.543	-32.457	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Bluetooth Headset
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 3: Transmit - 3Mbps (2441MHz)
 Test Date : 2018/06/25


Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V	dB	dB μ V
LINE 2					
Quasi-Peak					
0.152	9.606	30.699	40.305	-25.638	65.943
0.287	9.683	18.766	28.449	-33.637	62.086
0.410	9.687	20.964	30.651	-27.920	58.571
2.216	9.754	15.780	25.534	-30.466	56.000
2.654	9.766	14.888	24.654	-31.346	56.000
5.000	9.830	15.418	25.248	-30.752	56.000
Average					
0.152	9.606	17.717	27.323	-28.620	55.943
0.287	9.683	9.967	19.650	-32.436	52.086
0.410	9.687	9.842	19.530	-29.041	48.571
2.216	9.754	11.063	20.817	-25.183	46.000
2.654	9.766	8.827	18.593	-27.407	46.000
5.000	9.830	9.817	19.647	-26.353	46.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

3. Peak Power Output

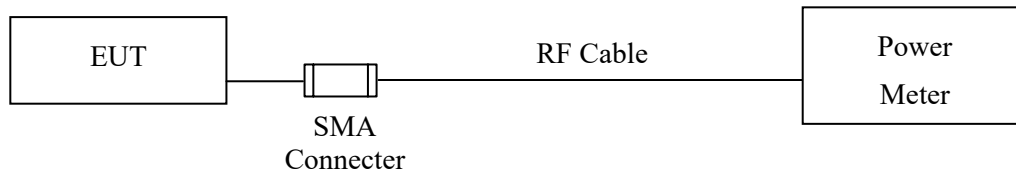3.1. Test Setup



3.2. Limit

The maximum peak power shall be less 1Watt.

3.3. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

3.4. Uncertainty

± 0.86 dB

3.5. Test Result of Peak Power Output

Product : Bluetooth Headset
Test Item : Peak Power Output
Test Mode : Mode 1: Transmit - 1Mbps
Test Date : 2018/06/27

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	9.17	1 Watt= 30 dBm	Pass
Channel 39	2441.00	9.53	1 Watt= 30 dBm	Pass
Channel 78	2480.00	9.53	1 Watt= 30 dBm	Pass

Product : Bluetooth Headset
Test Item : Peak Power Output
Test Mode : Mode 2: Transmit - 2Mbps
Test Date : 2018/06/27

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	8.57	1 Watt= 30 dBm	Pass
Channel 39	2441.00	8.67	1 Watt= 30 dBm	Pass
Channel 78	2480.00	8.63	1 Watt= 30 dBm	Pass


Product : Bluetooth Headset
Test Item : Peak Power Output
Test Mode : Mode 3: Transmit - 3Mbps
Test Date : 2018/06/27

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	8.17	1 Watt= 30 dBm	Pass
Channel 39	2441.00	8.68	1 Watt= 30 dBm	Pass
Channel 78	2480.00	8.62	1 Watt= 30 dBm	Pass


4. Radiated Emission

4.1. Test Setup

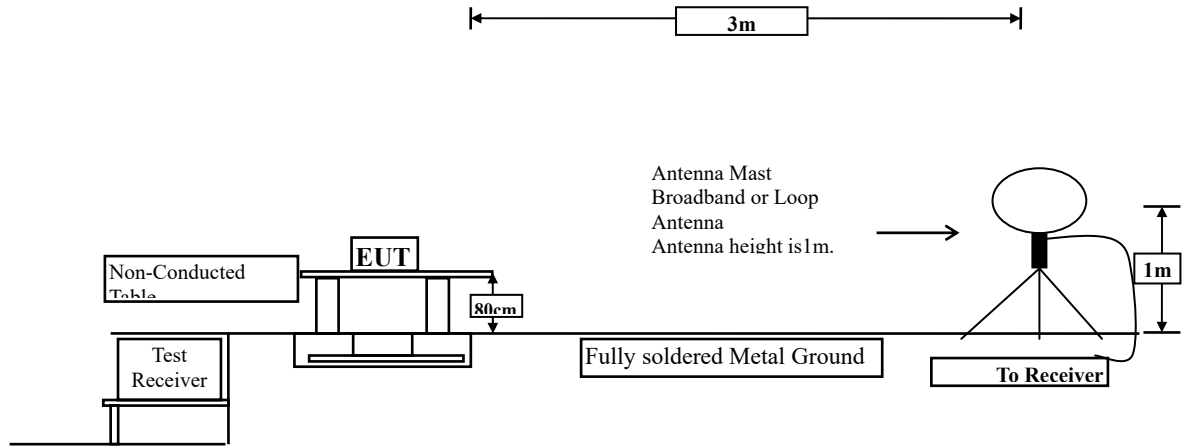
Radiated Emission Under 30MHz



Radiated Emission Below 1GHz

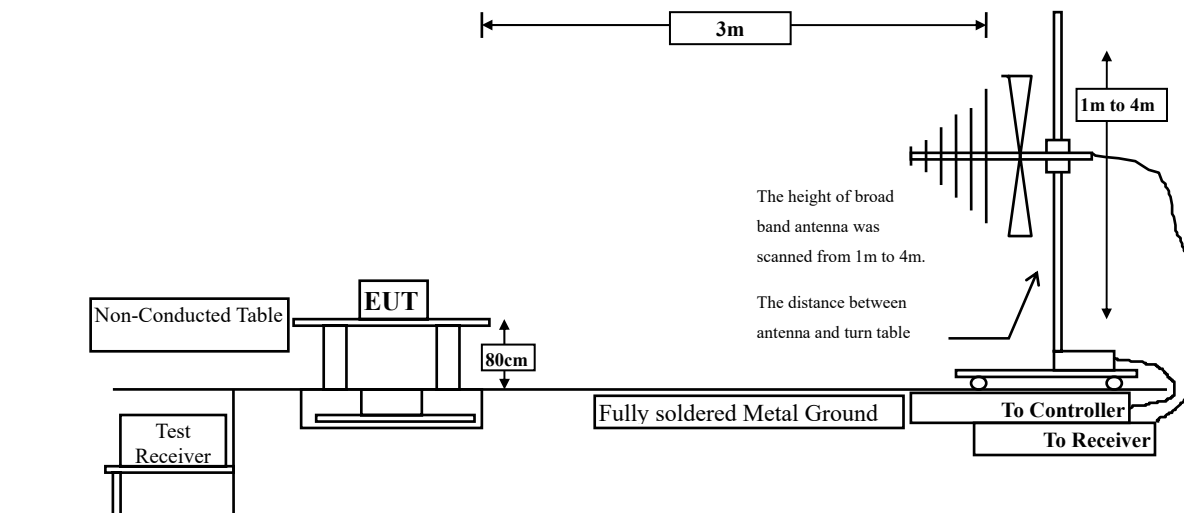

Radiated Emission Above 1GHz

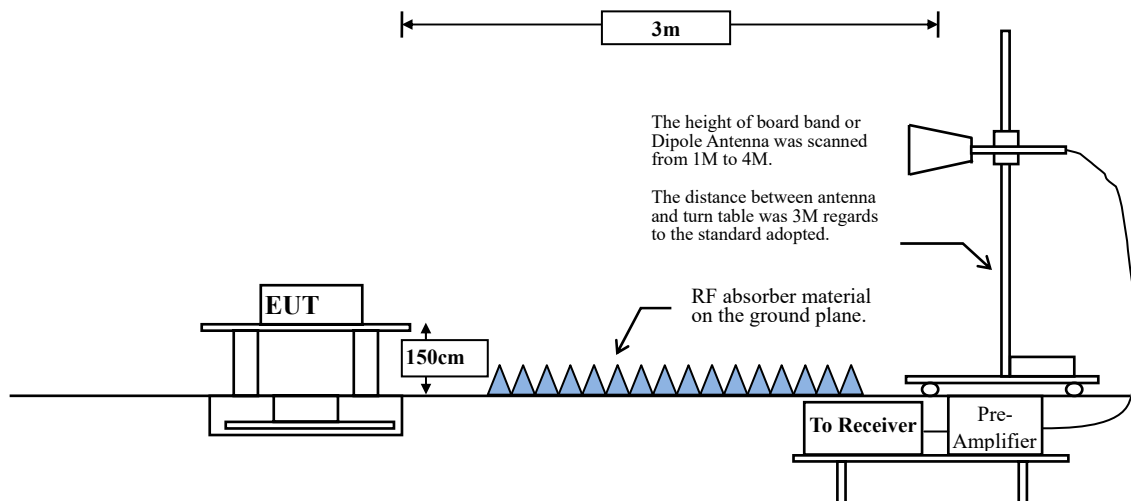

4.2. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

- Remarks:
1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

4.4. Uncertainty

Horizontal polarization :

30-300MHz: $\pm 4.08\text{dB}$; 300M-1GHz: $\pm 3.86\text{dB}$; 1-18GHz: $\pm 3.77\text{dB}$; 18-40GHz: $\pm 3.98\text{dB}$

Vertical polarization :

30-300MHz: $\pm 4.81\text{dB}$; 300M-1GHz: $\pm 3.87\text{dB}$; 1-18GHz: $\pm 3.83\text{dB}$; 18-40GHz: $\pm 3.98\text{dB}$

4.5. Test Result of Radiated Emission

Product : Bluetooth Headset
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps(2402MHz)
 Test Date : 2018/06/26

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
4804.000	-6.081	59.010	52.929	-21.071	74.000
7206.000	-3.033	51.330	48.297	-25.703	74.000
9608.000	-0.774	46.590	45.817	-28.183	74.000
Average					
Detector:					
--					54.000
Vertical					
Peak Detector:					
4804.000	-6.081	58.600	52.519	-21.481	74.000
7206.000	-3.033	51.340	48.307	-25.693	74.000
9608.000	-0.774	46.900	46.127	-27.873	74.000
Average					
Detector:					
--					54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Bluetooth Headset
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps(2441MHz)
 Test Date : 2018/06/26

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
4882.000	-6.042	57.870	51.828	-22.172	74.000
7323.000	-2.954	51.410	48.456	-25.544	74.000
9764.000	-0.487	46.920	46.433	-27.567	74.000
Average					
Detector:					
--					54.000
Vertical					
Peak Detector:					
4882.000	-6.042	57.940	51.898	-22.102	74.000
7323.000	-2.954	50.990	48.036	-25.964	74.000
9764.000	-0.487	47.450	46.963	-27.037	74.000
Average					
Detector:					
--					54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Bluetooth Headset
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps(2480MHz)
 Test Date : 2018/06/26

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
4960.000	-6.041	54.810	48.769	-25.231	74.000
7440.000	-2.805	50.180	47.375	-26.625	74.000
9920.000	-0.260	45.650	45.390	-28.610	74.000
Average					
Detector:					
--					54.000
Vertical					
Peak Detector:					
4960.000	-6.041	55.560	49.519	-24.481	74.000
7440.000	-2.805	51.640	48.835	-25.165	74.000
9920.000	-0.260	45.800	45.540	-28.460	74.000
Average					
Detector:					
--					54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Bluetooth Headset
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 3: Transmit - 3Mbps(2402MHz)
 Test Date : 2018/06/26

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
4804.000	-6.081	57.480	51.399	-22.601	74.000
7206.000	-3.033	49.570	46.537	-27.463	74.000
9608.000	-0.774	46.520	45.747	-28.253	74.000
Average					
Detector:					
--					54.000
Vertical					
Peak Detector:					
4804.000	-6.081	57.270	51.189	-22.811	74.000
7206.000	-3.033	48.920	45.887	-28.113	74.000
9608.000	-0.774	46.290	45.517	-28.483	74.000
Average					
Detector:					
--					54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Bluetooth Headset
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 3: Transmit - 3Mbps (2441MHz)
 Test Date : 2018/06/26

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
Horizontal					
Peak Detector:					
4882.000	-6.042	57.170	51.128	-22.872	74.000
7323.000	-2.954	49.330	46.376	-27.624	74.000
9764.000	-0.487	46.570	46.083	-27.917	74.000
Average					
Detector:					
--					54.000
Vertical					
Peak Detector:					
4882.000	-6.042	57.110	51.068	-22.932	74.000
7323.000	-2.954	48.550	45.596	-28.404	74.000
9764.000	-0.487	47.180	46.693	-27.307	74.000
Average					
Detector:					
--					54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Bluetooth Headset
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 3: Transmit - 3Mbps (2480MHz)
 Test Date : 2018/06/26

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
4960.000	-6.041	53.380	47.339	-26.661	74.000
7440.000	-2.805	48.590	45.785	-28.215	74.000
9920.000	-0.260	45.290	45.030	-28.970	74.000
Average					
Detector:					
--					54.000
Vertical					
Peak Detector:					
4960.000	-6.041	55.030	48.989	-25.011	74.000
7440.000	-2.805	49.550	46.745	-27.255	74.000
9920.000	-0.260	46.380	46.120	-27.880	74.000
Average					
Detector:					
--					54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Bluetooth Headset
 Test Item : General Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps (2441MHz)
 Test Date : 2018/06/26

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
46.870	-10.852	37.187	26.334	-13.666	40.000
107.319	-14.863	49.309	34.446	-9.054	43.500
150.899	-11.057	38.275	27.218	-16.282	43.500
198.696	-13.710	47.951	34.241	-9.259	43.500
247.899	-12.110	39.296	27.187	-18.813	46.000
312.565	-10.044	36.559	26.516	-19.484	46.000
Vertical					
46.870	-10.852	41.388	30.535	-9.465	40.000
73.580	-14.333	37.894	23.561	-16.439	40.000
108.725	-14.616	38.734	24.119	-19.381	43.500
202.913	-13.664	40.668	27.005	-16.495	43.500
499.536	-5.960	34.770	28.810	-17.190	46.000
533.275	-5.440	32.892	27.452	-18.548	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Bluetooth Headset
 Test Item : General Radiated Emission
 Test Mode : Mode 3: Transmit - 3Mbps (2441MHz)
 Test Date : 2018/06/26


Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
51.087	-11.048	36.550	25.502	-14.498	40.000
96.072	-16.719	44.694	27.975	-15.525	43.500
119.971	-13.432	43.673	30.241	-13.259	43.500
148.087	-11.146	36.097	24.951	-18.549	43.500
198.696	-13.710	47.488	33.778	-9.722	43.500
332.246	-9.591	35.012	25.422	-20.578	46.000
Vertical					
108.725	-14.616	39.164	24.549	-18.951	43.500
190.261	-13.582	36.729	23.147	-20.353	43.500
205.725	-13.599	38.554	24.956	-18.544	43.500
254.928	-12.017	36.832	24.815	-21.185	46.000
332.246	-9.591	34.544	24.954	-21.046	46.000
470.014	-6.457	33.596	27.139	-18.861	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

5. RF Antenna Conducted Test

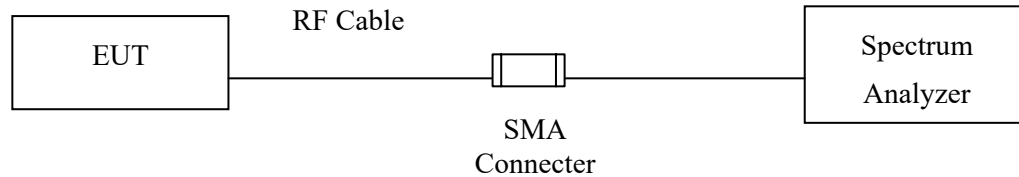5.1. Test Setup



5.2. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

5.3. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

5.4. Uncertainty

$\pm 1.23\text{dB}$

5.5. Test Result of RF Antenna Conducted Test

Product : Bluetooth Headset
Test Item : RF Antenna Conducted Test
Test Mode : Mode 1: Transmit - 1Mbps
Test Date : 2018/07/02

Figure Channel 00:

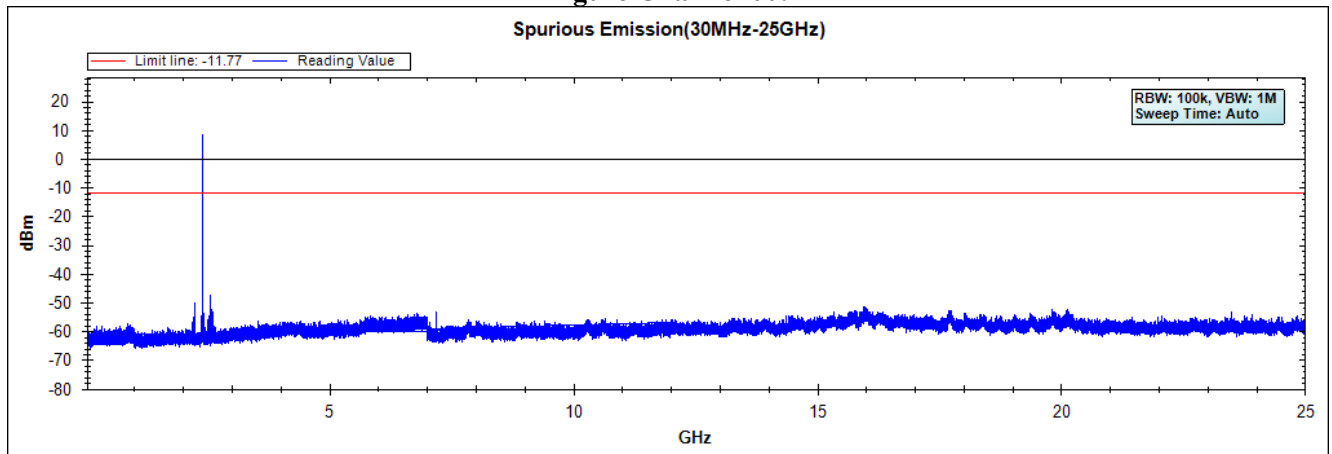


Figure Channel 39:


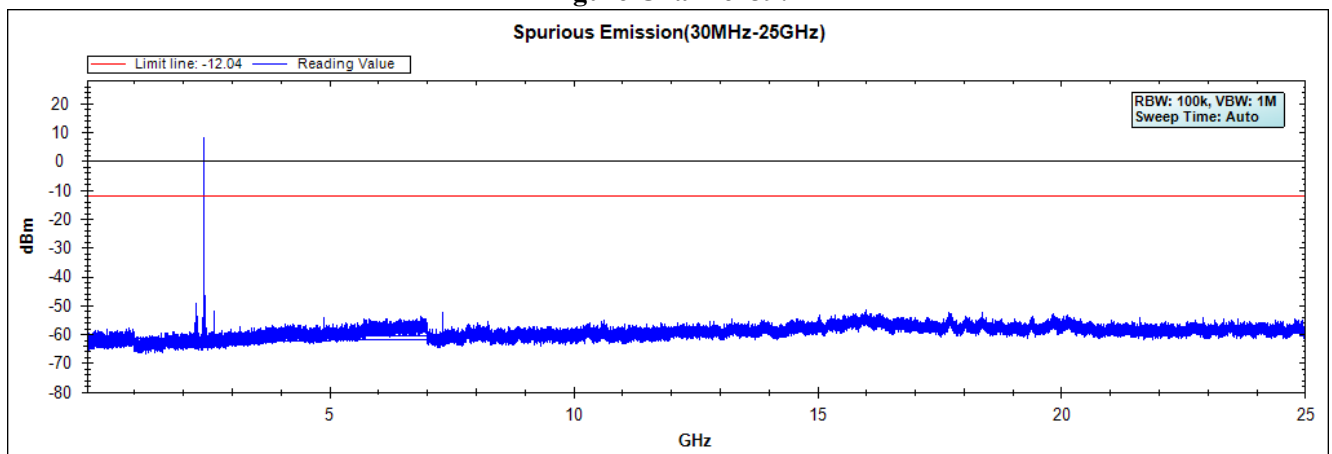
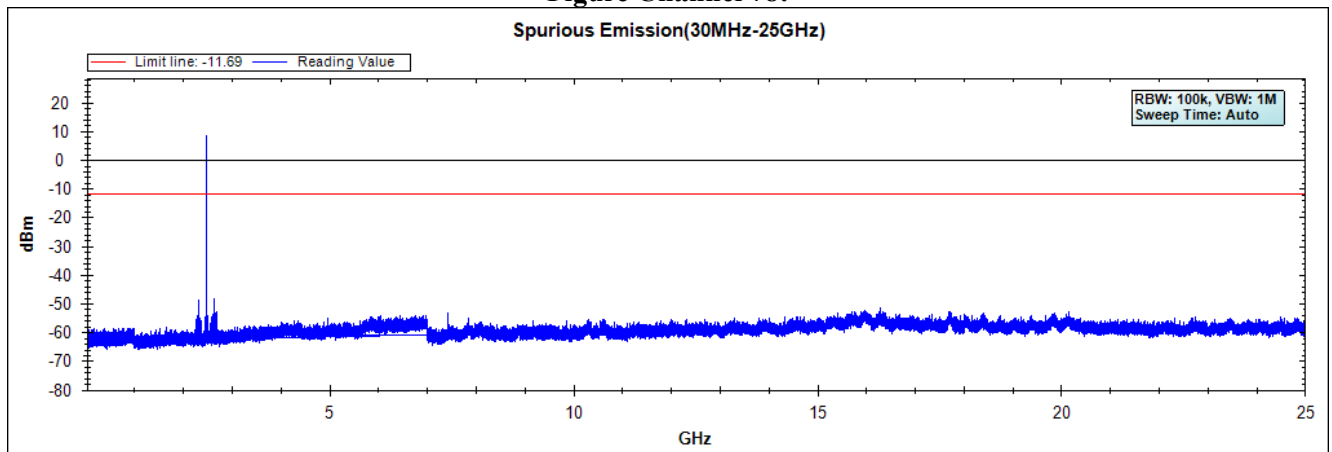
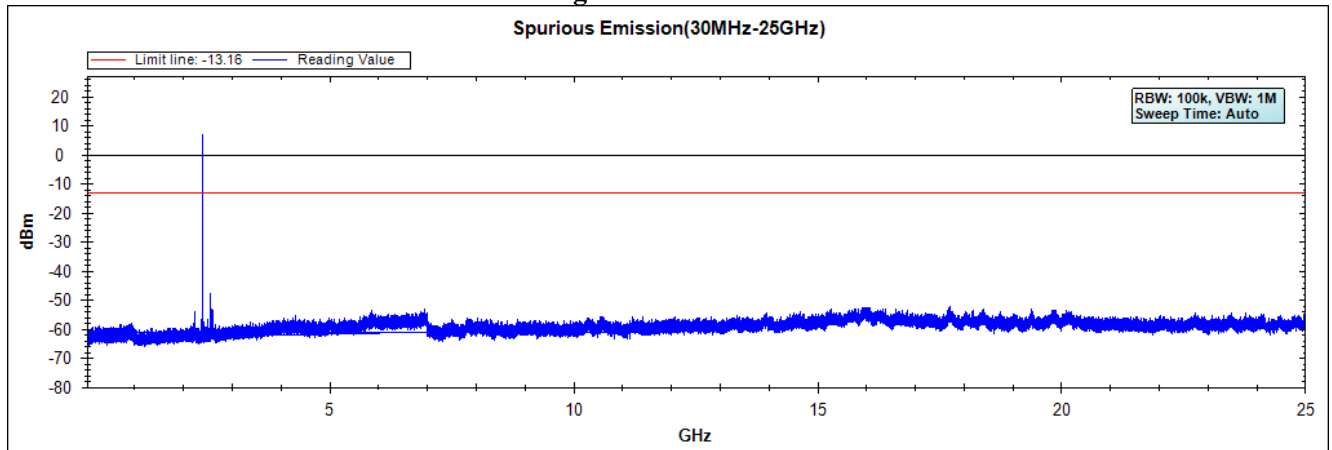
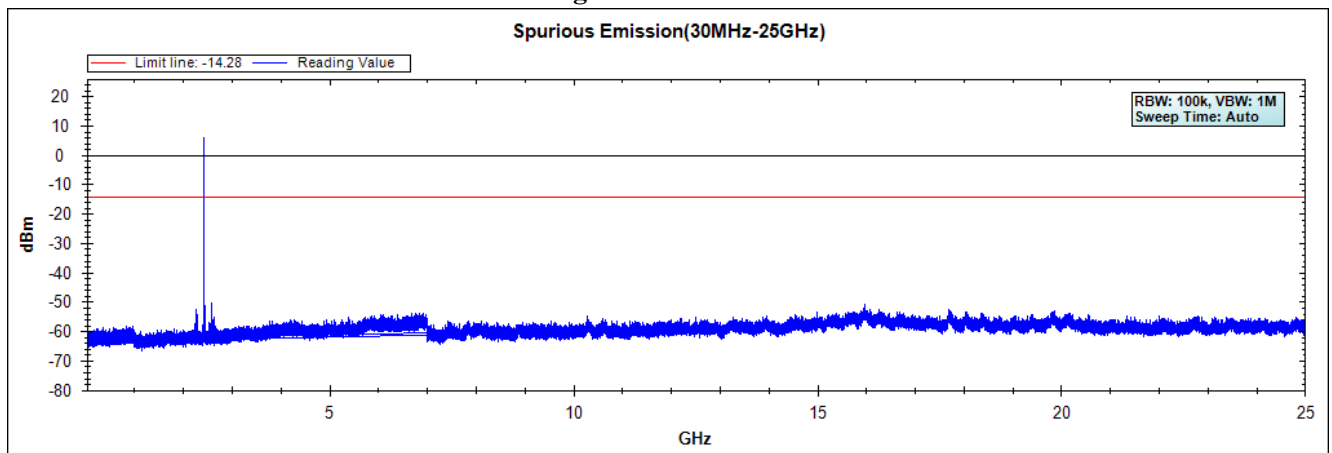


Figure Channel 78:

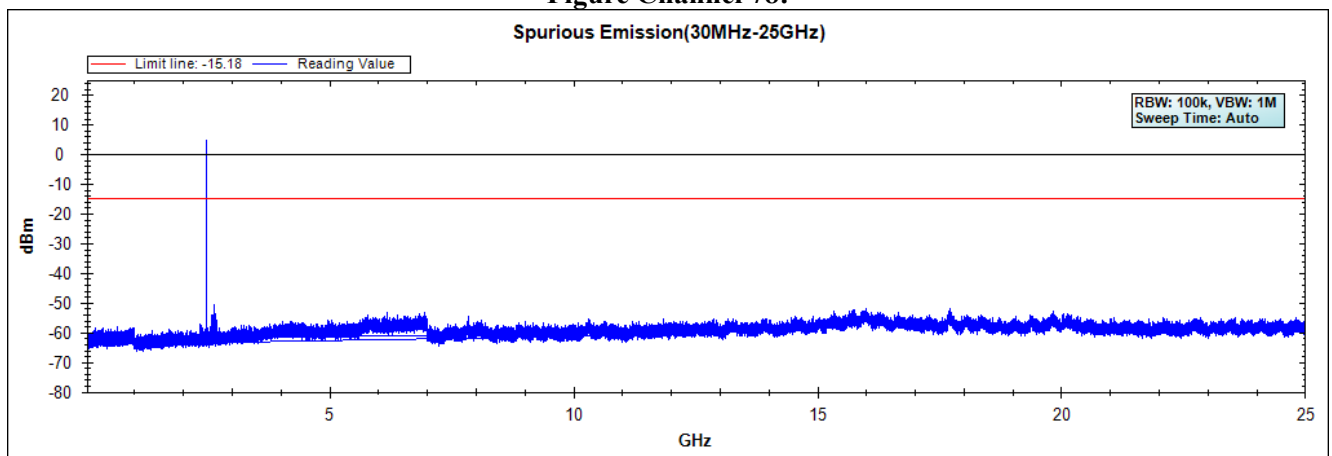

Note: The above test pattern is synthesized by multiple of the frequency range.

Product : Bluetooth Headset
Test Item : RF Antenna Conducted Test
Test Mode : Mode 3: Transmit - 3Mbps
Test Date : 2018/07/02


Figure Channel 00:**Figure Channel 39:****Figure Channel 78:**

Note: The above test pattern is synthesized by multiple of the frequency range.


6. Band Edge

6.1. Test Setup

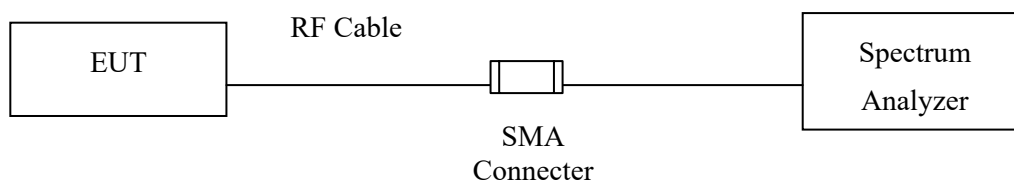RF Conducted Measurement



RF Radiated Measurement:

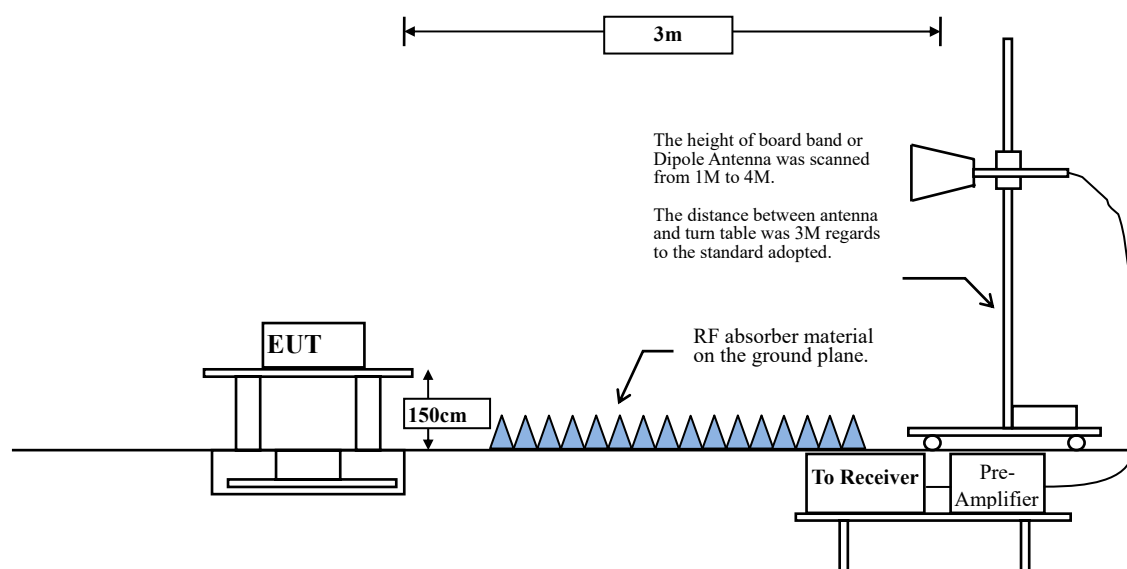

6.2. Limit

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.3. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

The bandwidth setting below 1GHz and above 1GHz on the field strength meter is 120 kHz and 1MHz, respectively.

6.4. Uncertainty

Conducted: $\pm 1.23\text{dB}$

Radiated:

Horizontal polarization : 1-18GHz: $\pm 3.77\text{dB}$

Vertical polarization : 1-18GHz : $\pm 3.83\text{dB}$

6.5. Test Result of Band Edge

Product : Bluetooth Headset
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps (2402MHz)
 Test Date : 2018/06/25

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
00 (Peak)	2376.232	10.784	35.059	45.843	74.00	54.00	Pass
00 (Peak)	2390.000	10.841	30.827	41.668	74.00	54.00	Pass
00 (Peak)	2400.000	10.884	61.707	72.591	--	--	Pass
00 (Peak)	2402.174	10.893	93.956	104.849	--	--	--
00 (Average)	2375.942	10.783	22.598	33.381	74.00	54.00	Pass
00 (Average)	2390.000	10.841	17.768	28.609	74.00	54.00	Pass
00 (Average)	2400.000	10.884	33.815	44.699	--	--	Pass
00 (Average)	2401.884	10.892	55.274	66.166	--	--	--

Figure Channel 00:

Horizontal (Peak)


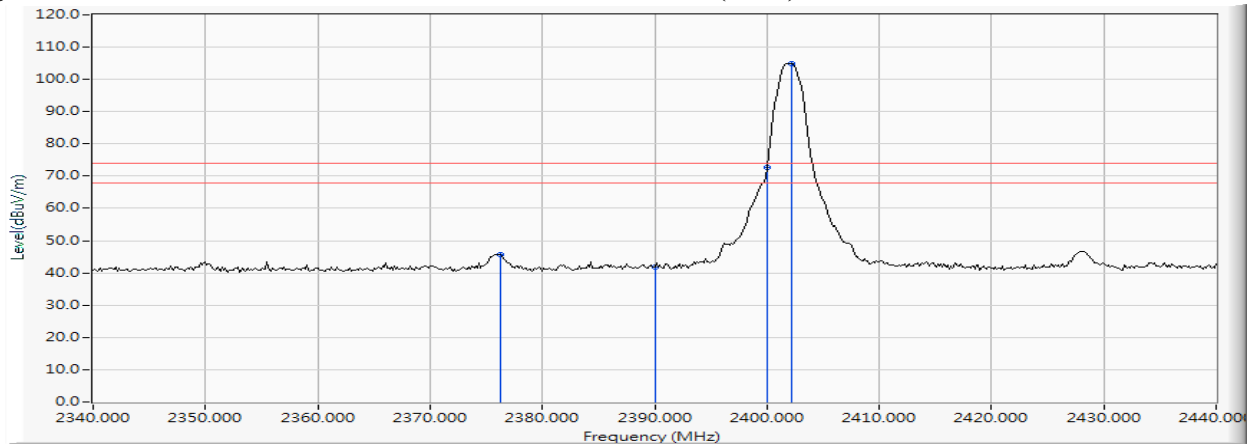


Figure Channel 00:

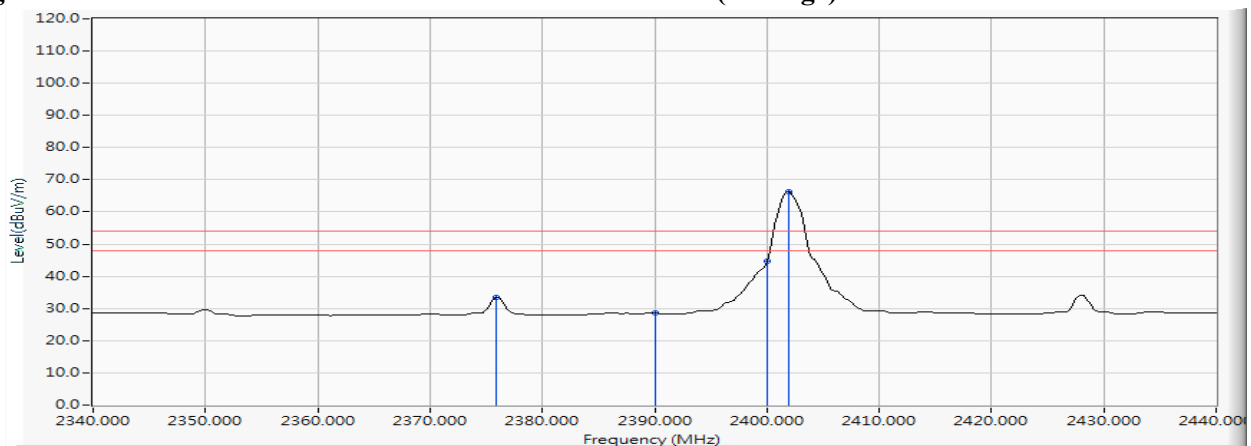Horizontal (Average)





Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Bluetooth Headset
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps (2402MHz)
 Test Date : 2018/06/25

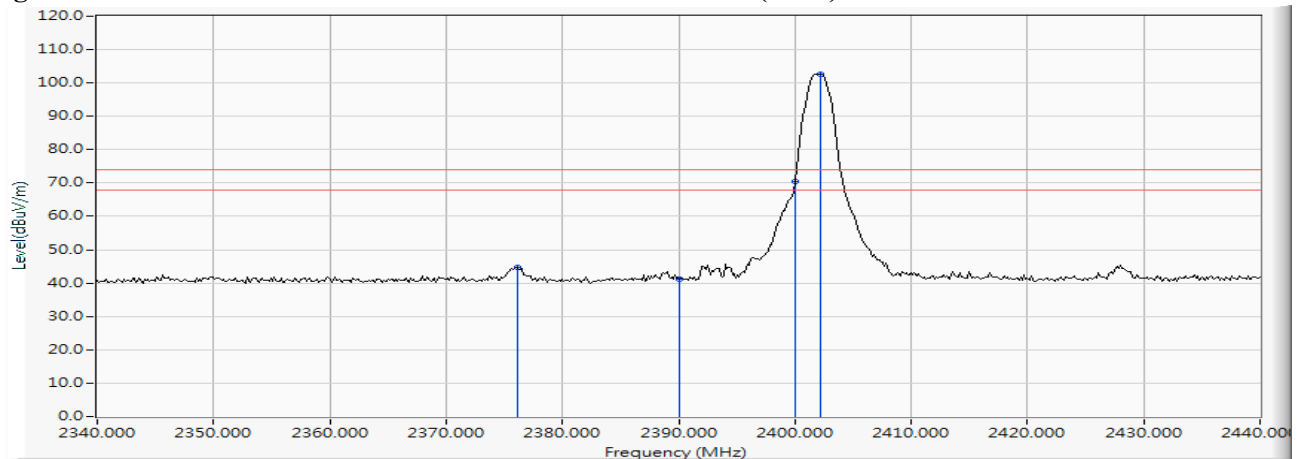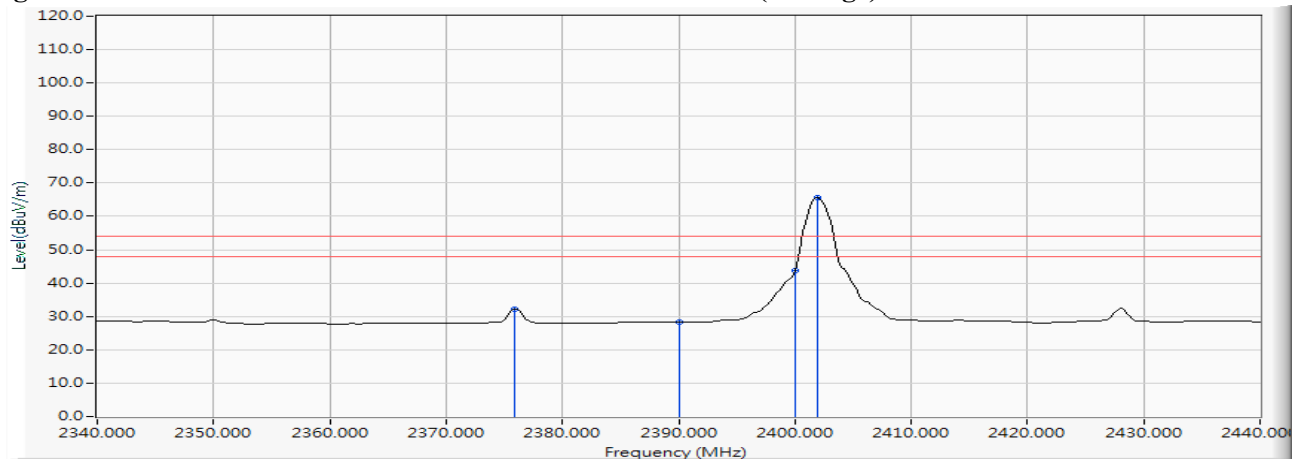RF Radiated Measurement (VERTICAL):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
00 (Peak)	2376.087	10.783	34.001	44.784	74.00	54.00	Pass
00 (Peak)	2390.000	10.841	30.433	41.274	74.00	54.00	Pass
00 (Peak)	2400.000	10.884	59.592	70.476	--	--	Pass
00 (Peak)	2402.174	10.893	91.846	102.739	--	--	--
00 (Average)	2375.942	10.783	21.434	32.217	74.00	54.00	Pass
00 (Average)	2390.000	10.841	17.516	28.357	74.00	54.00	Pass
00 (Average)	2400.000	10.884	32.920	43.804	--	--	Pass
00 (Average)	2401.884	10.892	54.652	65.544	--	--	--

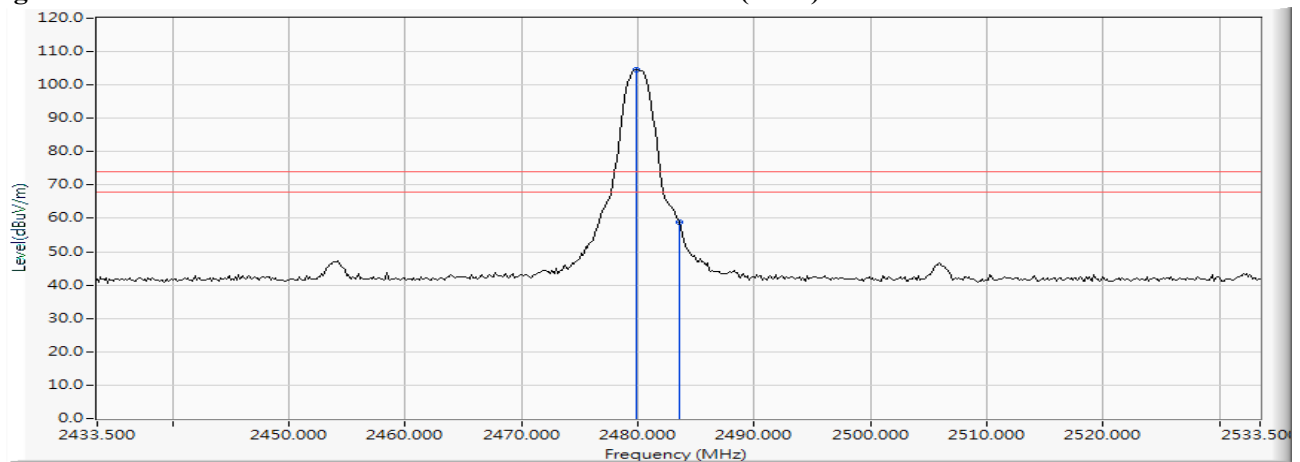
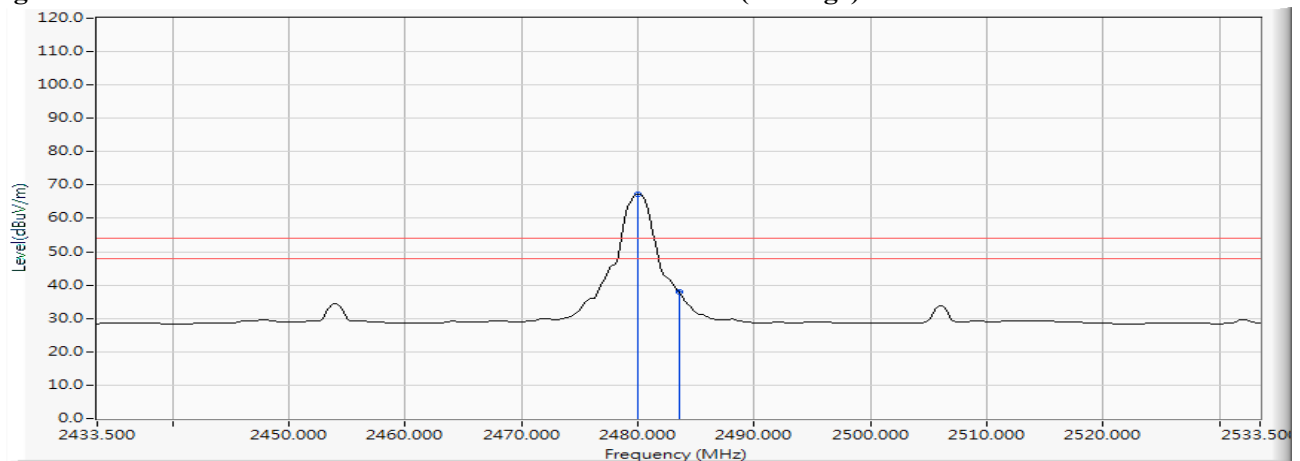
Figure Channel 00:
VERTICAL (Peak)

Figure Channel 00:
VERTICAL (Average)

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Bluetooth Headset
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps (2480MHz)
 Test Date : 2018/06/25

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
78 (Peak)	2479.877	11.216	93.275	104.490	--	--	--
78 (Peak)	2483.500	11.229	47.598	58.828	74.00	54.00	Pass
78 (Average)	2480.022	11.216	56.072	67.288	--	--	--
78 (Average)	2483.500	11.229	26.696	37.926	74.00	54.00	Pass

Figure Channel 78:
Horizontal (Peak)

Figure Channel 78:
Horizontal (Average)


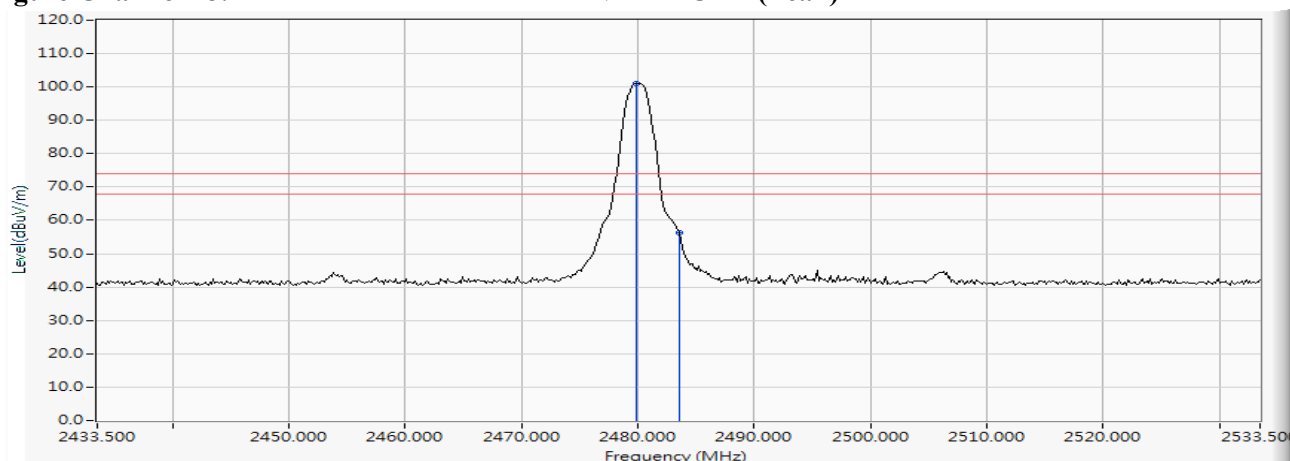
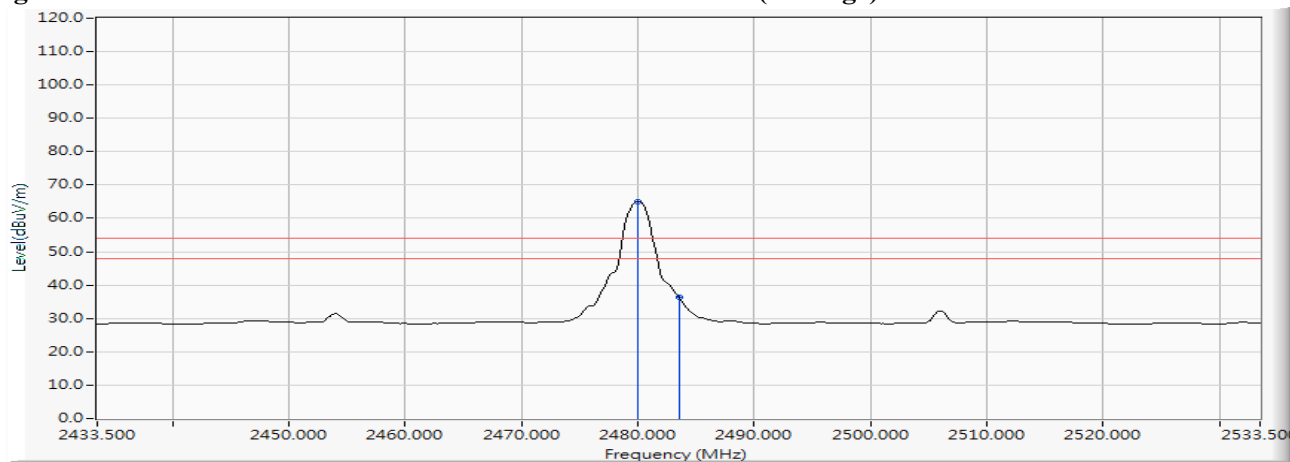
Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Bluetooth Headset
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps (2480MHz)
 Test Date : 2018/06/25

RF Radiated Measurement (VERTICAL):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
78 (Peak)	2479.877	11.216	89.757	100.972	--	--	--
78 (Peak)	2483.500	11.229	44.918	56.148	74.00	54.00	Pass
78 (Average)	2480.022	11.216	53.887	65.103	--	--	--
78 (Average)	2483.500	11.229	25.206	36.436	74.00	54.00	Pass

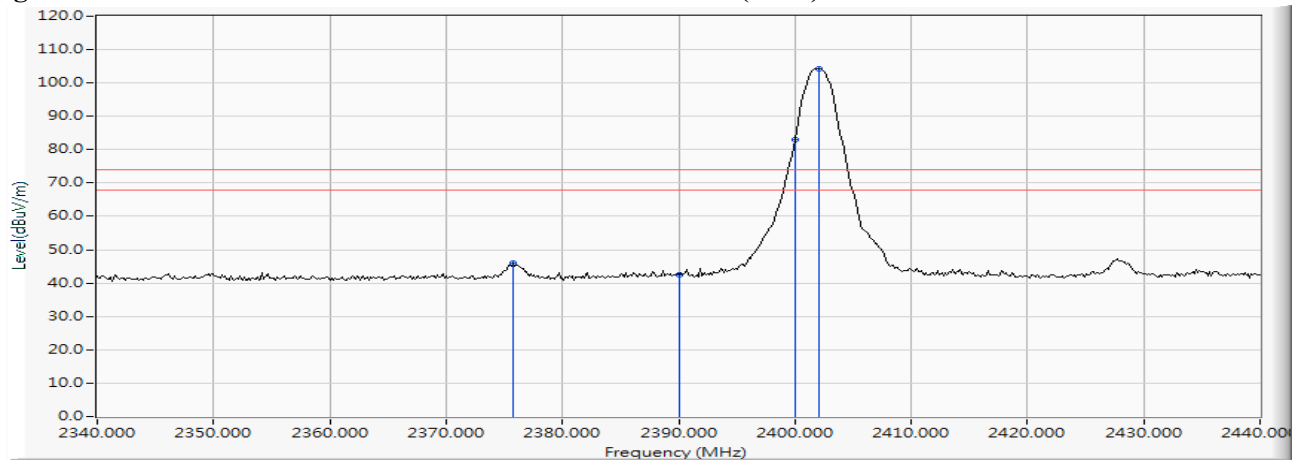
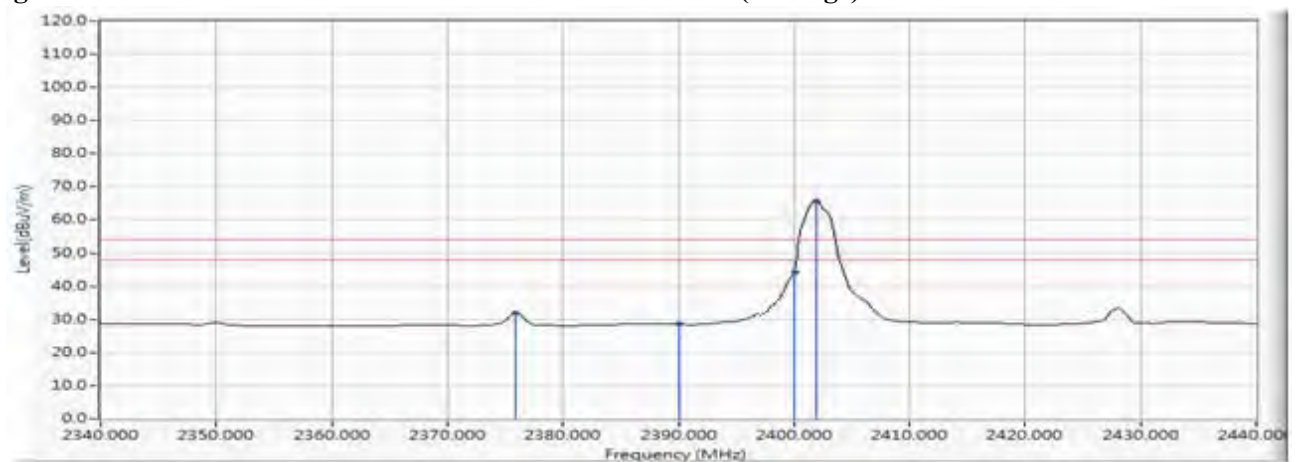
Figure Channel 78:
VERTICAL (Peak)

Figure Channel 78:
VERTICAL (Average)

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Bluetooth Headset
 Test Item : Band Edge
 Test Mode : Mode 3: Transmit - 3Mbps (2402MHz)
 Test Date : 2018/06/25

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
00 (Peak)	2375.797	10.782	35.310	46.092	74.00	54.00	Pass
00 (Peak)	2390.000	10.841	31.541	42.382	74.00	54.00	Pass
00 (Peak)	2400.000	10.884	72.158	83.042	--	--	Pass
00 (Peak)	2402.029	10.893	93.310	104.202	--	--	--
00 (Average)	2375.942	10.783	21.081	31.864	74.00	54.00	Pass
00 (Average)	2390.000	10.841	17.790	28.631	74.00	54.00	Pass
00 (Average)	2400.000	10.884	34.291	45.175	--	--	Pass
00 (Average)	2401.884	10.892	54.872	65.764	--	--	--

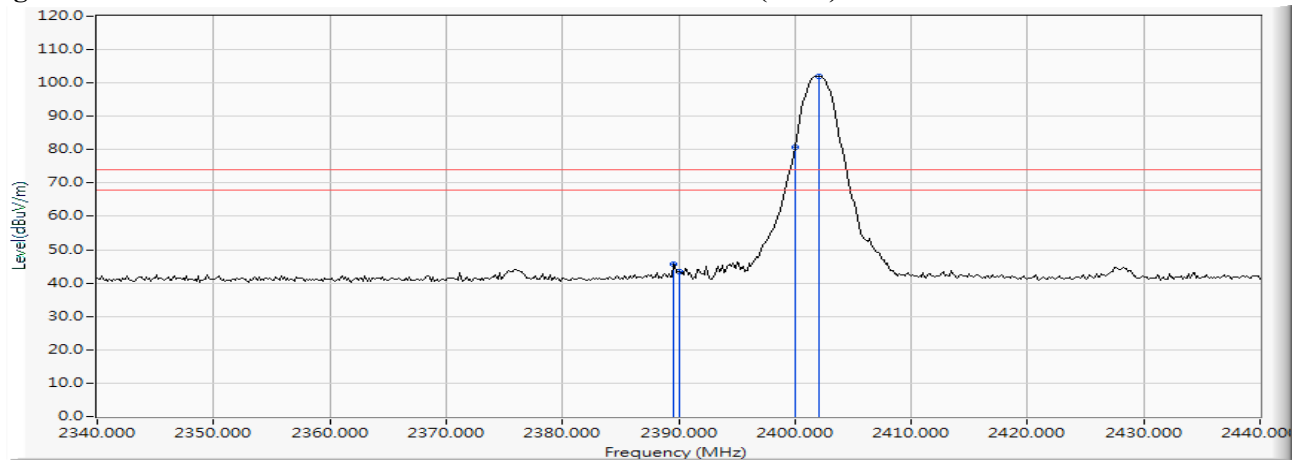
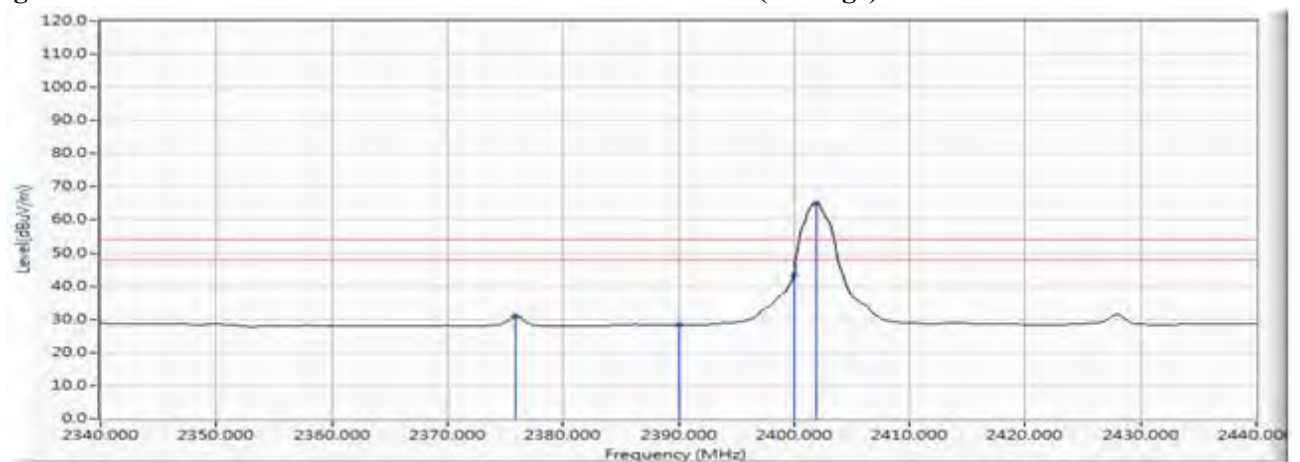
Figure Channel 00:
Horizontal (Peak)

Figure Channel 00:
Horizontal (Average)

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Bluetooth Headset
 Test Item : Band Edge
 Test Mode : Mode 3: Transmit - 3Mbps (2402MHz)
 Test Date : 2018/06/25

RF Radiated Measurement (VERTICAL):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
00 (Peak)	2389.565	10.840	34.767	45.607	74.00	54.00	Pass
00 (Peak)	2390.000	10.841	32.541	43.382	74.00	54.00	Pass
00 (Peak)	2400.000	10.884	69.963	80.847	--	--	Pass
00 (Peak)	2402.029	10.893	91.106	101.998	--	--	--
00 (Average)	2375.942	10.783	20.096	30.879	74.00	54.00	Pass
00 (Average)	2390.000	10.841	17.485	28.326	74.00	54.00	Pass
00 (Average)	2400.000	10.884	33.457	44.341	--	--	Pass
00 (Average)	2401.884	10.892	54.119	65.011	--	--	--

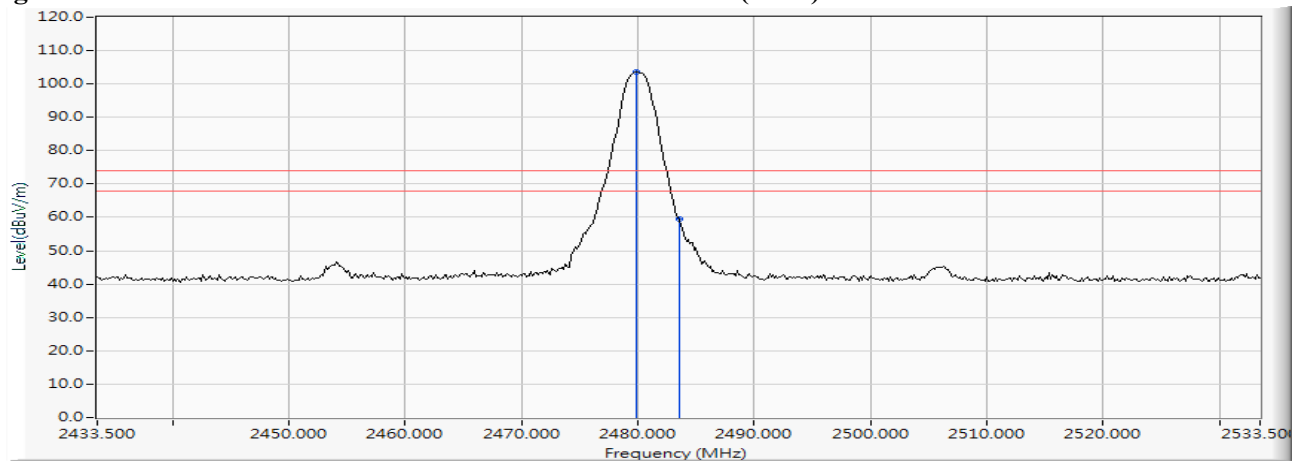
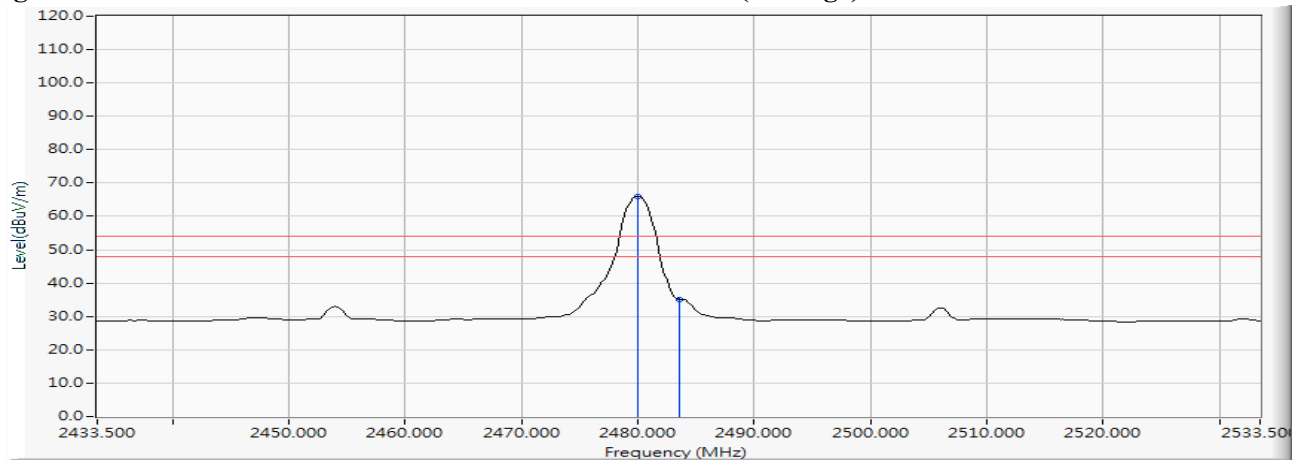
Figure Channel 00:
VERTICAL (Peak)

Figure Channel 00:
VERTICAL (Average)

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Bluetooth Headset
 Test Item : Band Edge
 Test Mode : Mode 3: Transmit - 3Mbps (2480MHz)
 Test Date : 2018/06/25

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
78 (Peak)	2479.877	11.216	92.357	103.572	--	--	--
78 (Peak)	2483.500	11.229	48.352	59.582	74.00	54.00	Pass
78 (Average)	2480.022	11.216	54.883	66.099	--	--	--
78 (Average)	2483.500	11.229	23.912	35.142	74.00	54.00	Pass

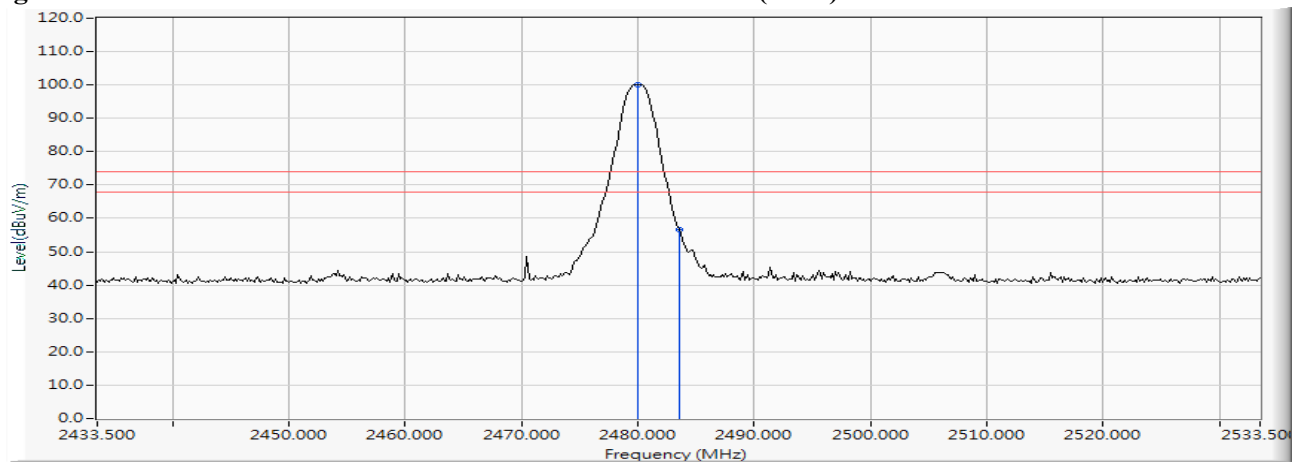
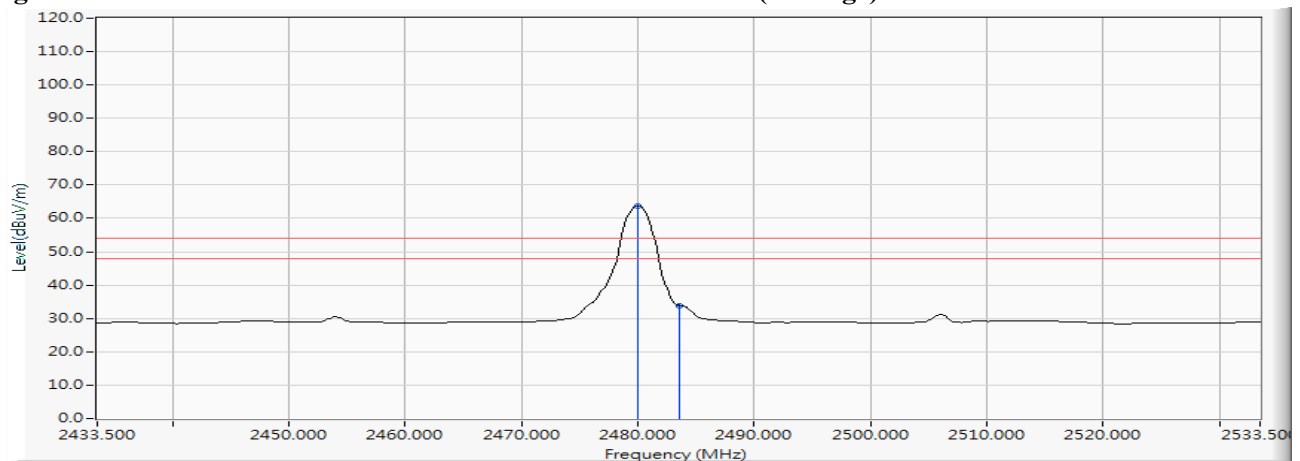
Figure Channel 00:
Horizontal (Peak)

Figure Channel 00:
Horizontal (Average)

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Bluetooth Headset
 Test Item : Band Edge
 Test Mode : Mode 3: Transmit - 3Mbps (2480MHz)
 Test Date : 2018/06/25

RF Radiated Measurement (VERTICAL):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
78 (Peak)	2480.022	11.216	88.989	100.205	--	--	--
78 (Peak)	2483.500	11.229	45.389	56.619	74.00	54.00	Pass
78 (Average)	2480.022	11.216	52.530	63.746	--	--	--
78 (Average)	2483.500	11.229	22.673	33.903	74.00	54.00	Pass

Figure Channel 78:
VERTICAL (Peak)

Figure Channel 78:
VERTICAL (Average)


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Bluetooth Headset
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps(Hopping off)

Measurement Level	Result
Δ (dB)	
> 20	PASS

Figure Channel 00:


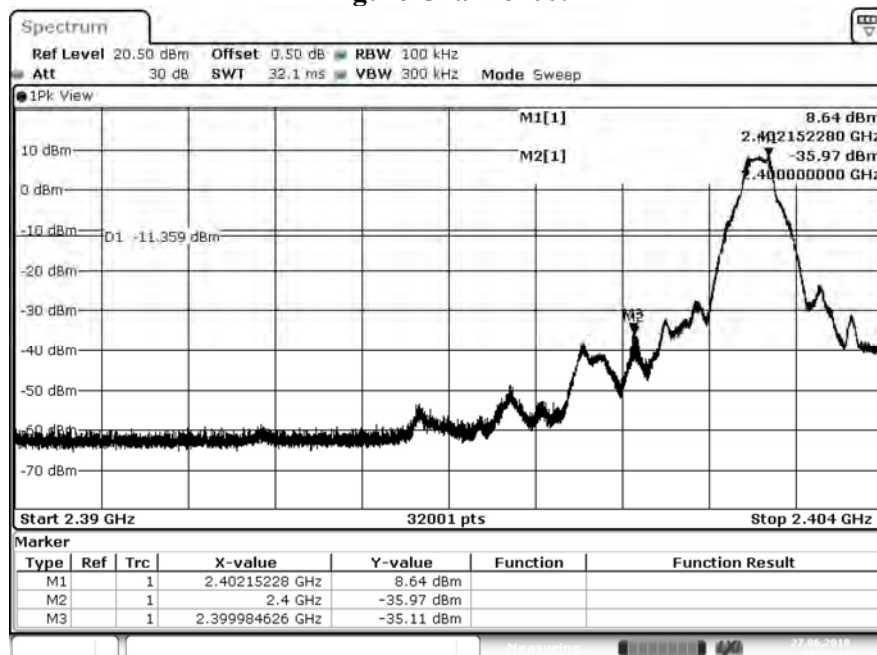


Figure Channel 78:

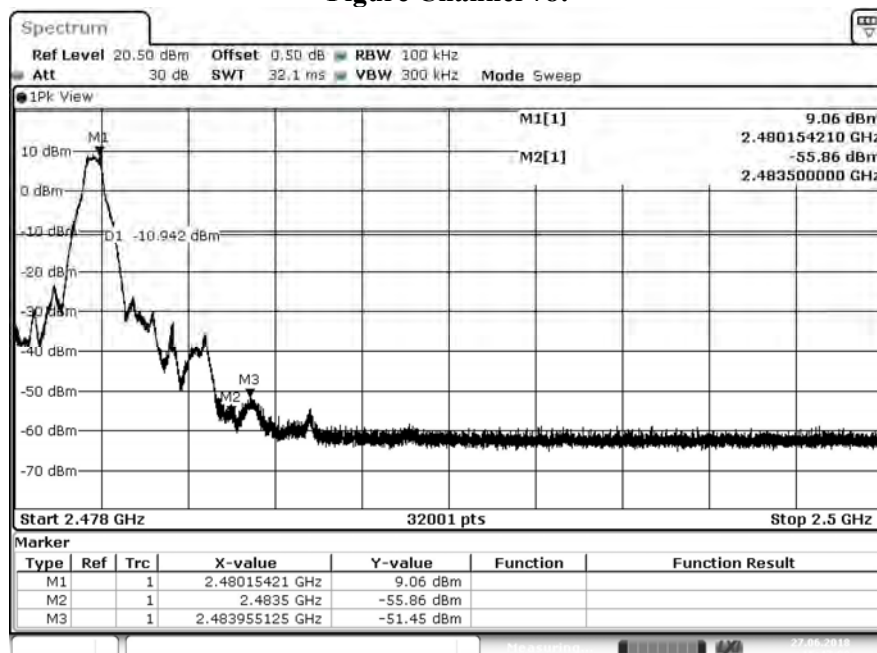

Product : Bluetooth Headset
 Test Item : Band Edge
 Test Mode : Mode 3: Transmit - 3Mbps (Hopping off)

Measurement Level	Result
Δ (dB)	
> 20	PASS

Figure Channel 00:


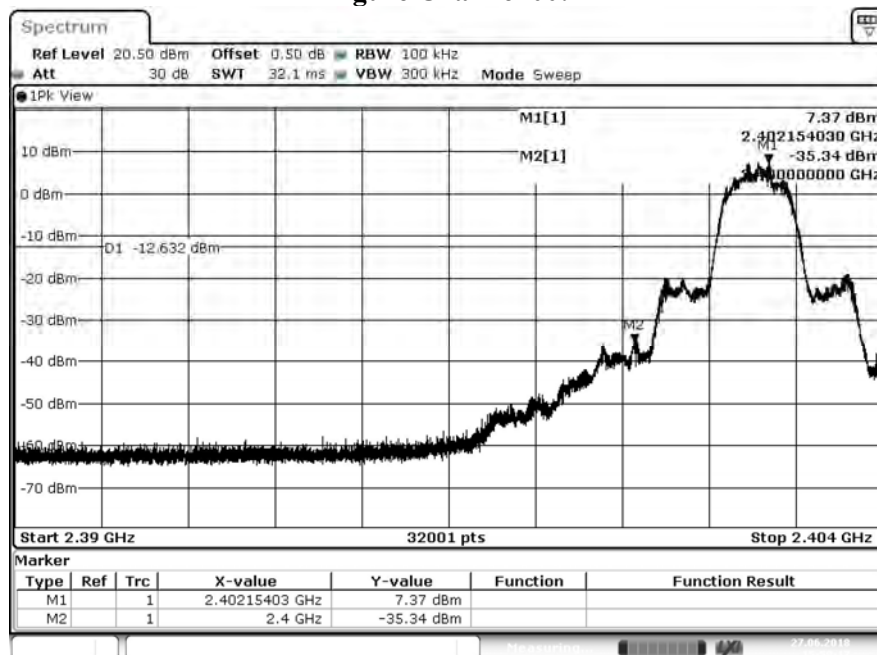


Figure Channel 78:

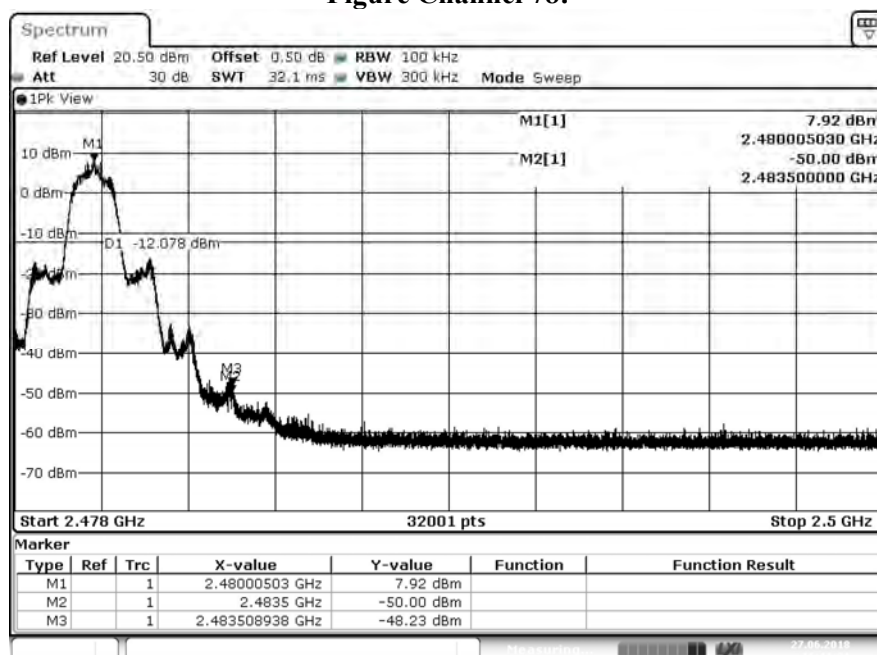

Product : Bluetooth Headset
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps(Hopping on)

Measurement Level	Result
Δ (dB)	
> 20	PASS

Figure Channel Hopping:


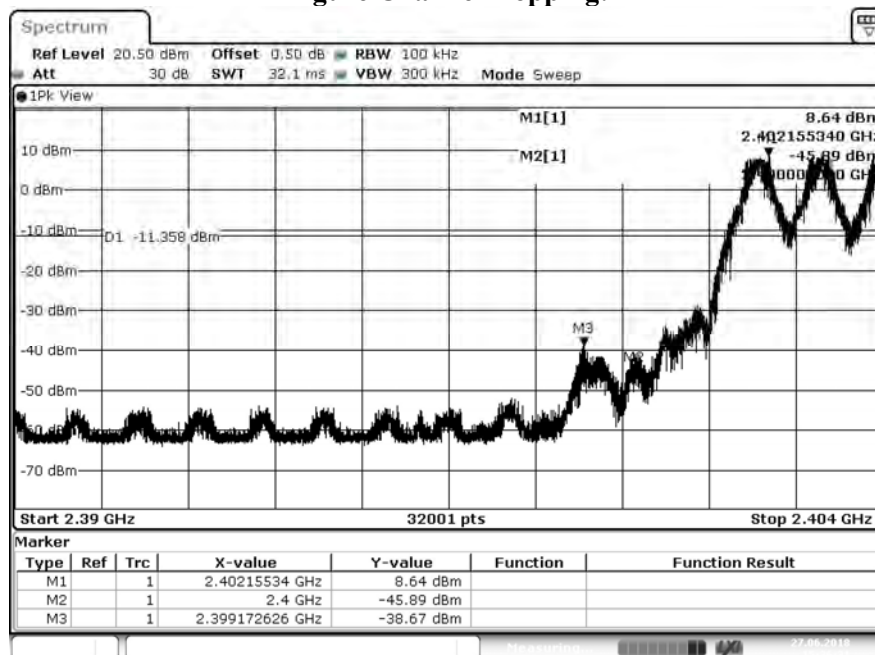


Figure Channel Hopping:

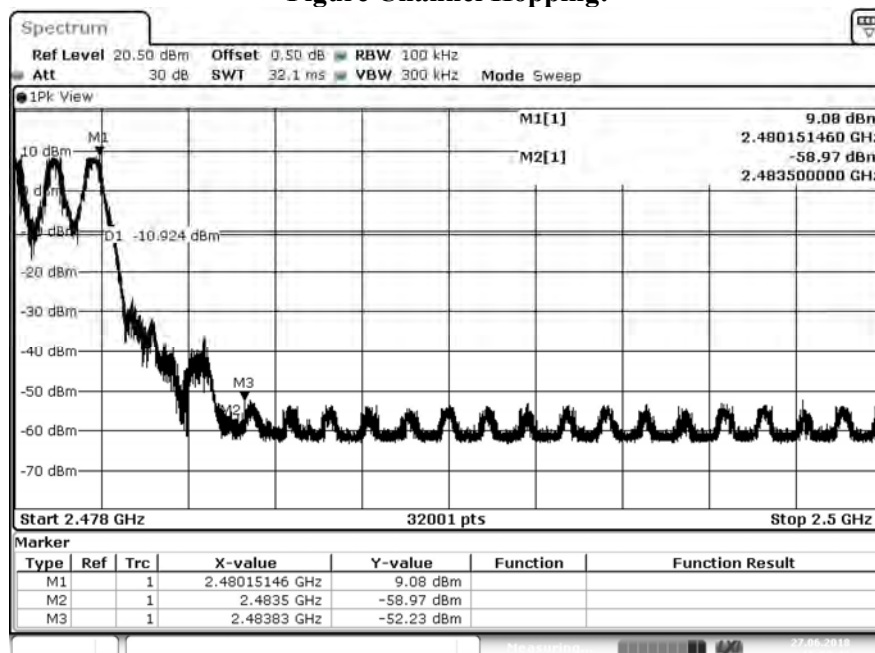

Product : Bluetooth Headset
 Test Item : Band Edge
 Test Mode : Mode 3: Transmit - 3Mbps (Hopping on)

Measurement Level	Result
Δ (dB)	
> 20	PASS

Figure Channel Hopping:



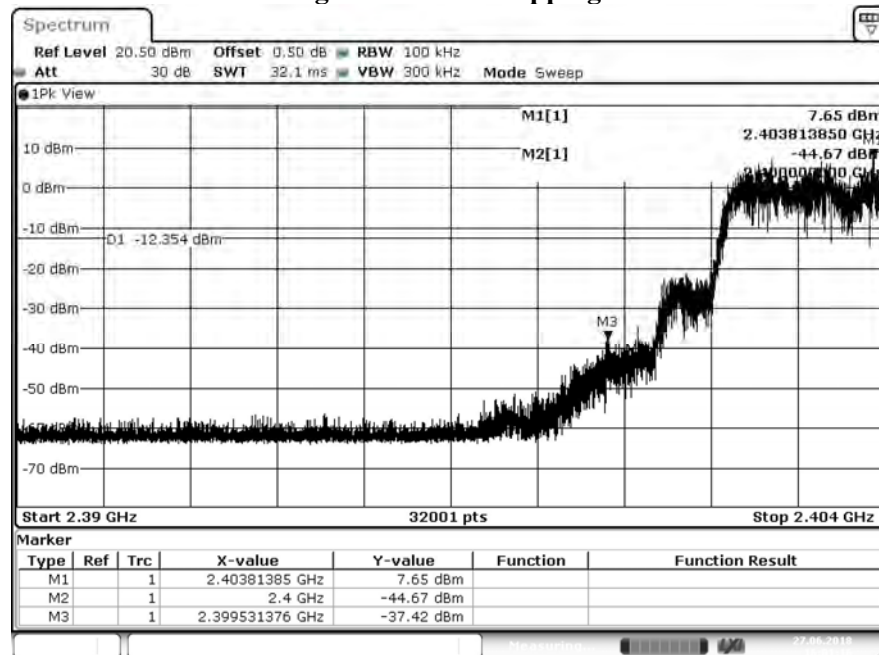


Figure Channel Hopping:

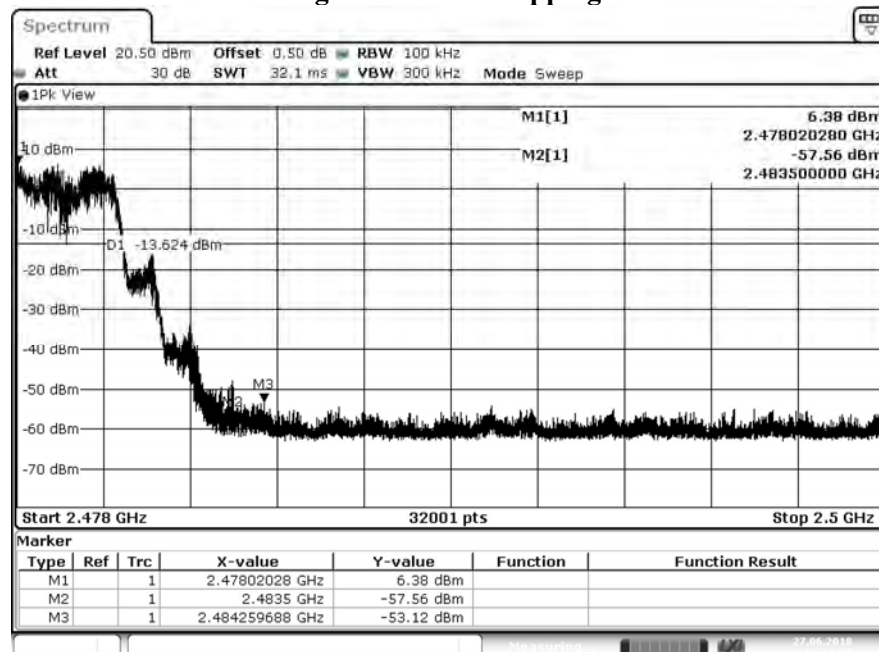

7. Channel Number

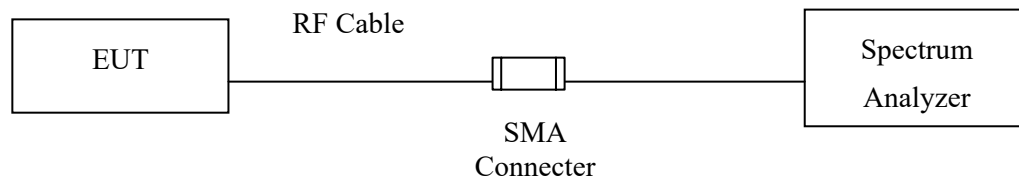7.1. Test Setup



7.2. Limit

Frequency hopping systems operating in the 2400-2483.5 MHz bands shall use at least 75 hopping frequencies.

7.3. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

7.4. Uncertainty


N/A

7.5. Test Result of Channel Number


Product : Bluetooth Headset
 Test Item : Channel Number
 Test Mode : Mode 1: Transmit - 1Mbps

Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>75	Pass

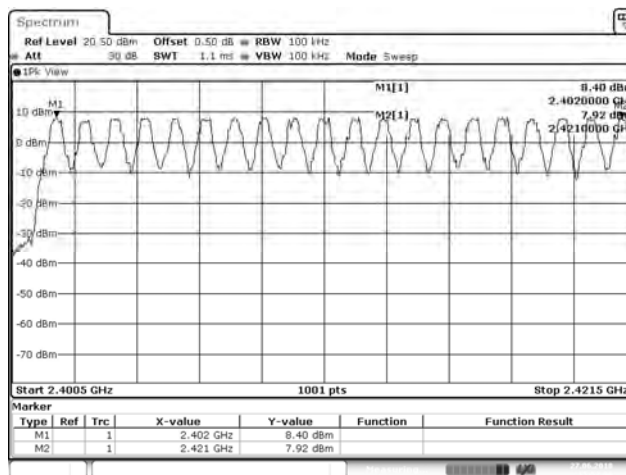
2402-2421MHz




2422-2441MHz

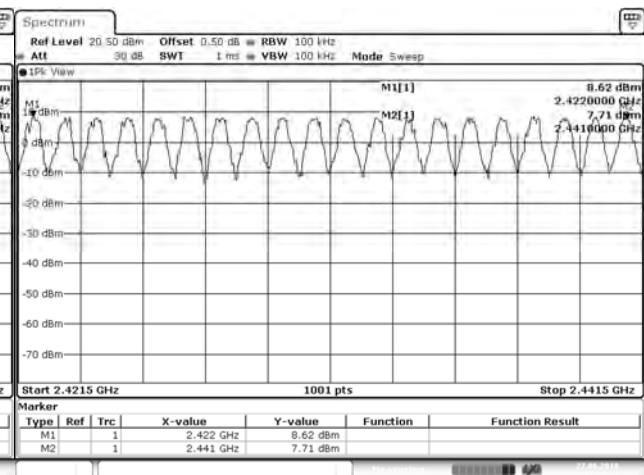

2442-2461MHz

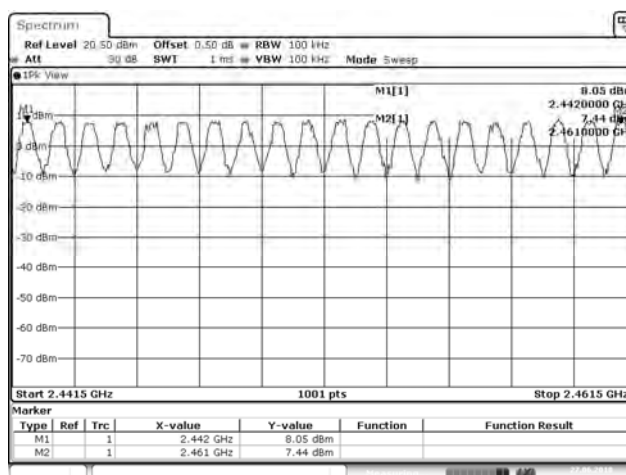


2462-2480MHz

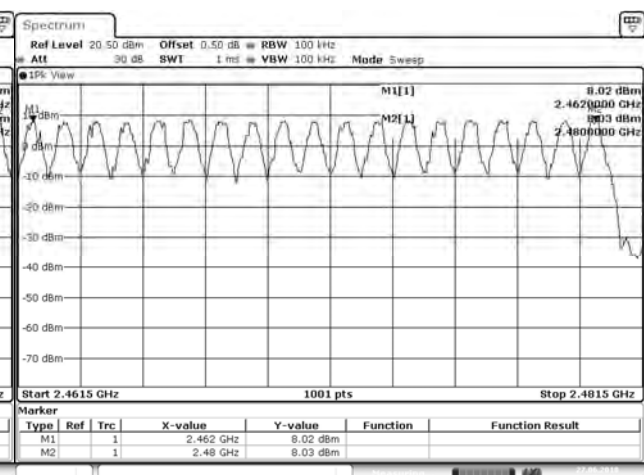


Product : Bluetooth Headset
 Test Item : Channel Number
 Test Mode : Mode 3: Transmit - 3Mbps

Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>75	Pass

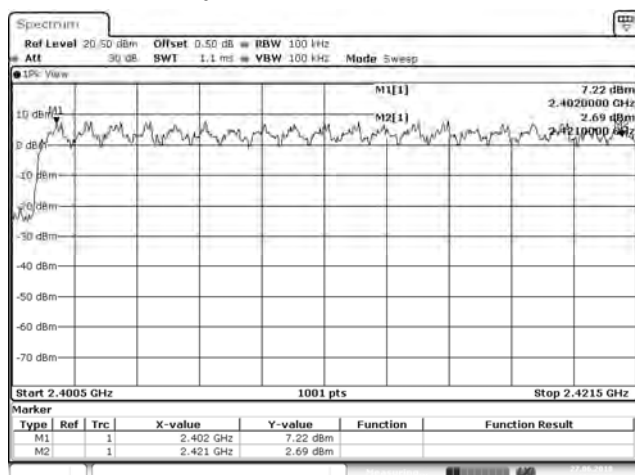
2402-2421MHz




2422-2441MHz

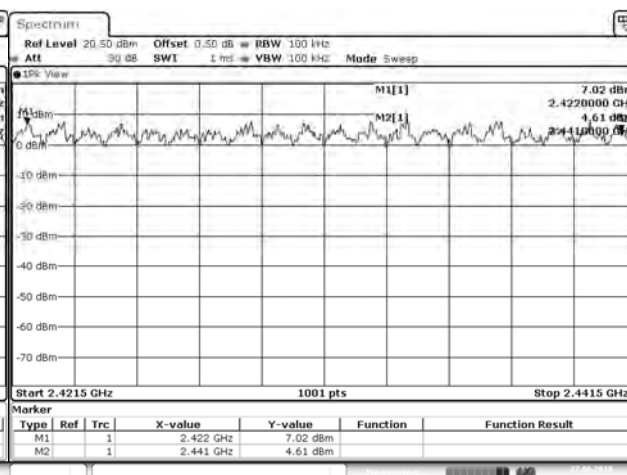

2442-2461MHz

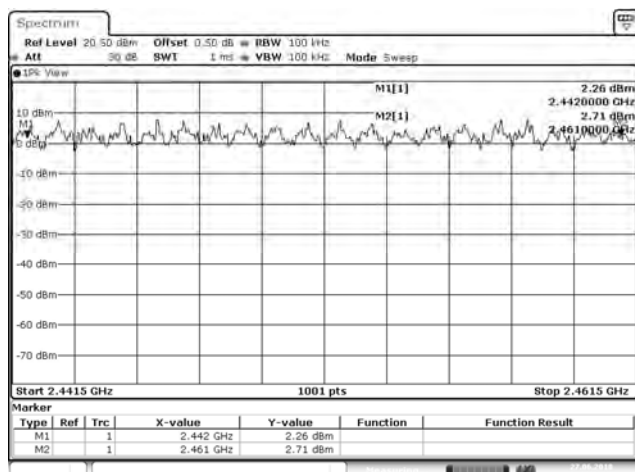


2462-2480MHz

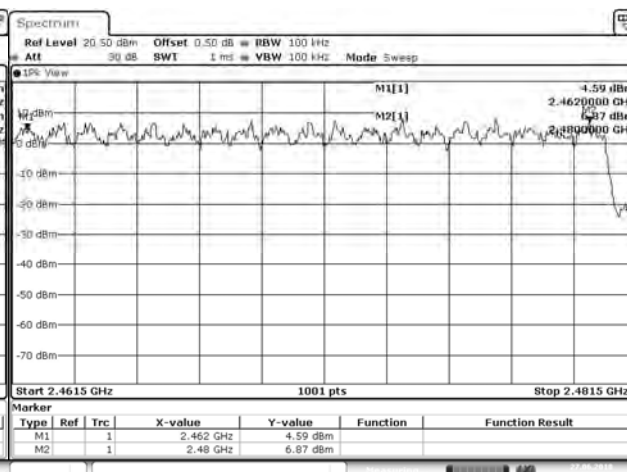

8. Channel Separation

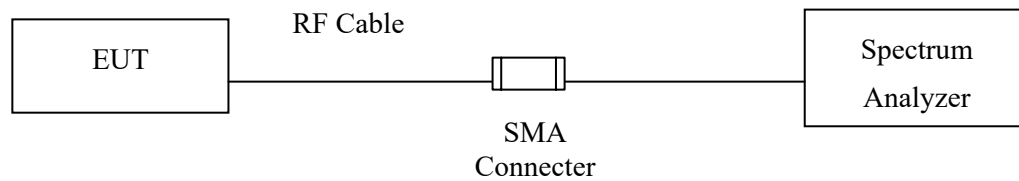8.1. Test Setup



8.2. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

8.3. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

8.4. Uncertainty

$\pm 279.2\text{Hz}$


8.5. Test Result of Channel Separation

Product : Bluetooth Headset
 Test Item : Channel Separation
 Test Mode : Mode 1: Transmit - 1Mbps


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Limit (kHz)	Limit of (2/3)*20dB Bandwidth (kHz)	Result
00	2402	1000	>25 kHz	632.0	Pass
39	2441	1000	>25 kHz	630.0	Pass
78	2480	1000	>25 kHz	630.0	Pass

NOTE: The 20dB Bandwidth is refer to section 10.

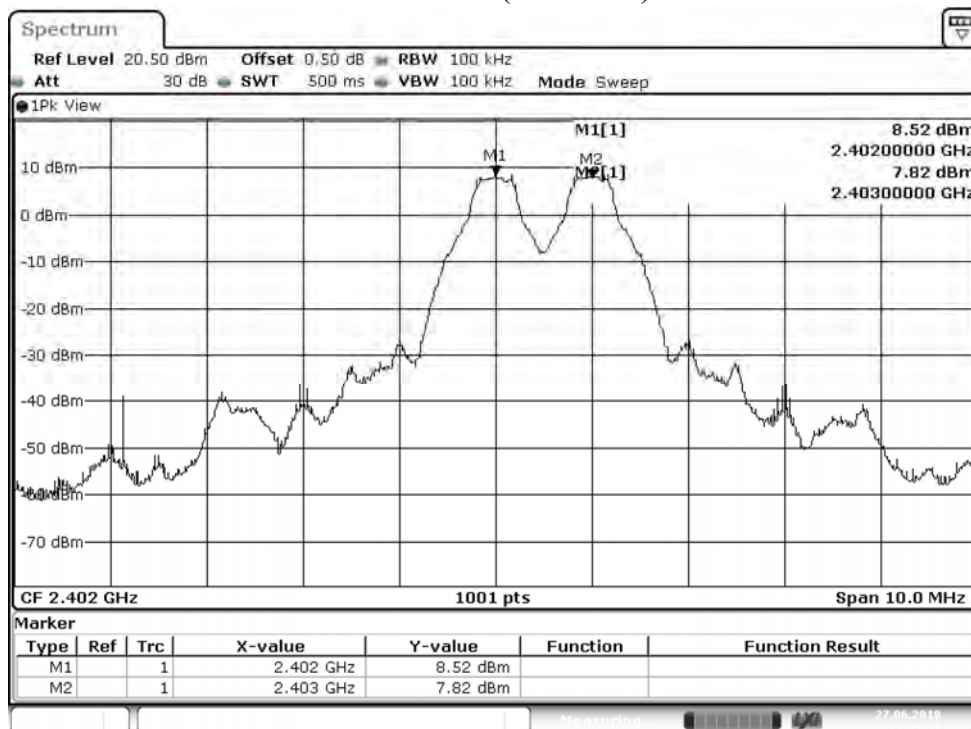
Channel 00 (2402MHz)



Channel 39 (2441MHz)

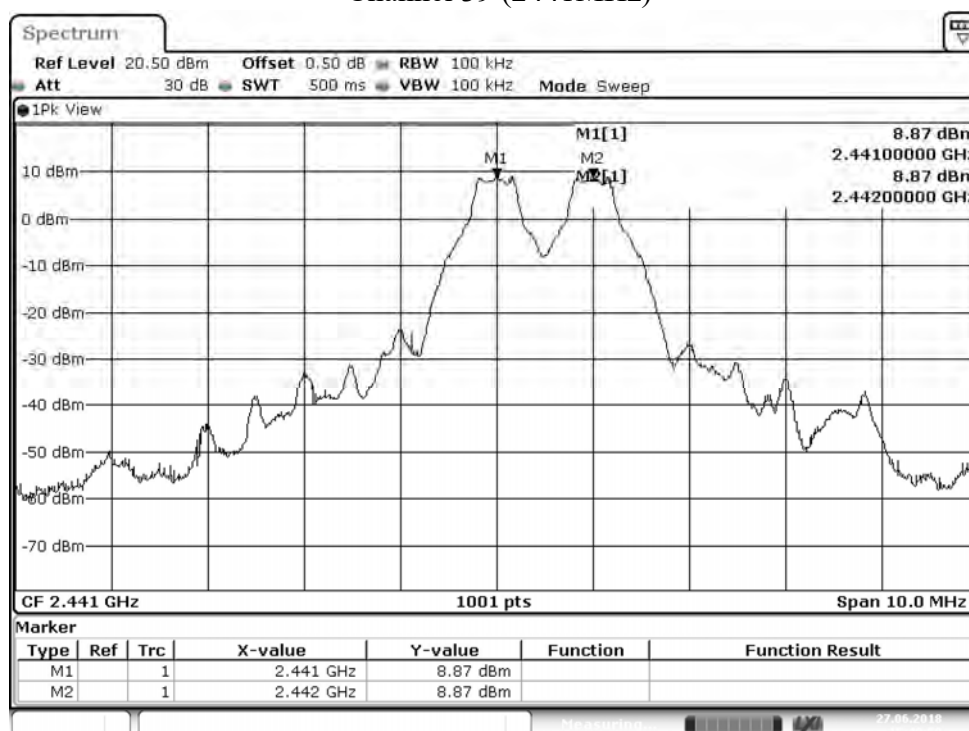

Channel 78 (2480MHz)

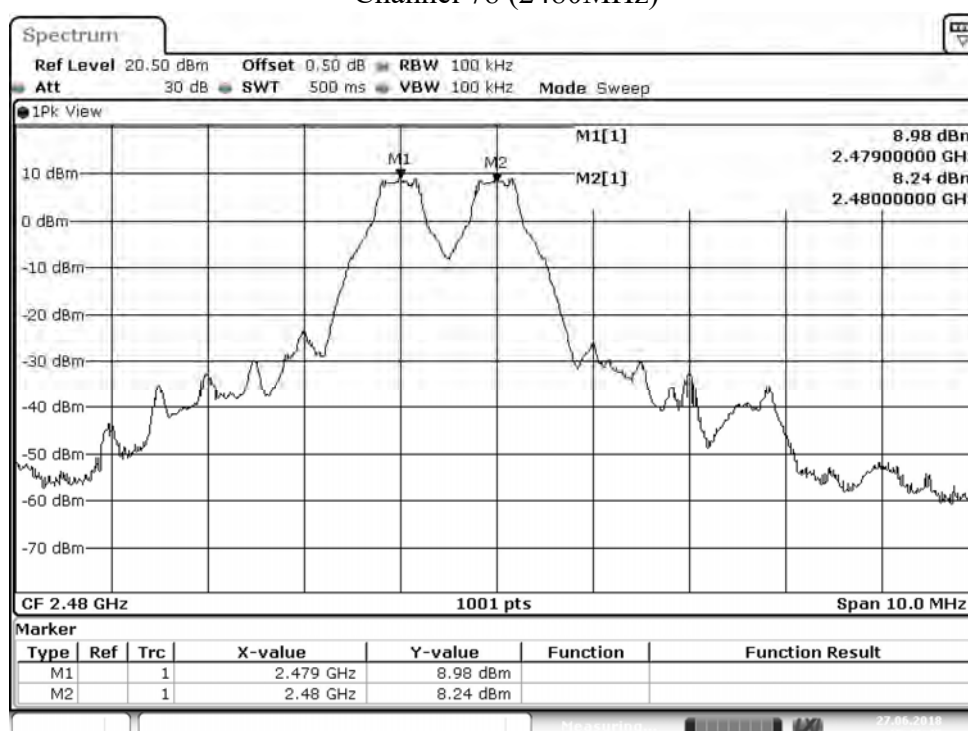


Product : Bluetooth Headset
 Test Item : Channel Separation
 Test Mode : Mode 3: Transmit - 3Mbps


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Limit (kHz)	Limit of (2/3)*20dB Bandwidth (kHz)	Result
00	2402	1000	>25 kHz	844.0	Pass
39	2441	1000	>25 kHz	846.0	Pass
78	2480	1000	>25 kHz	846.0	Pass

NOTE: The 20dB Bandwidth is refer to section 10.

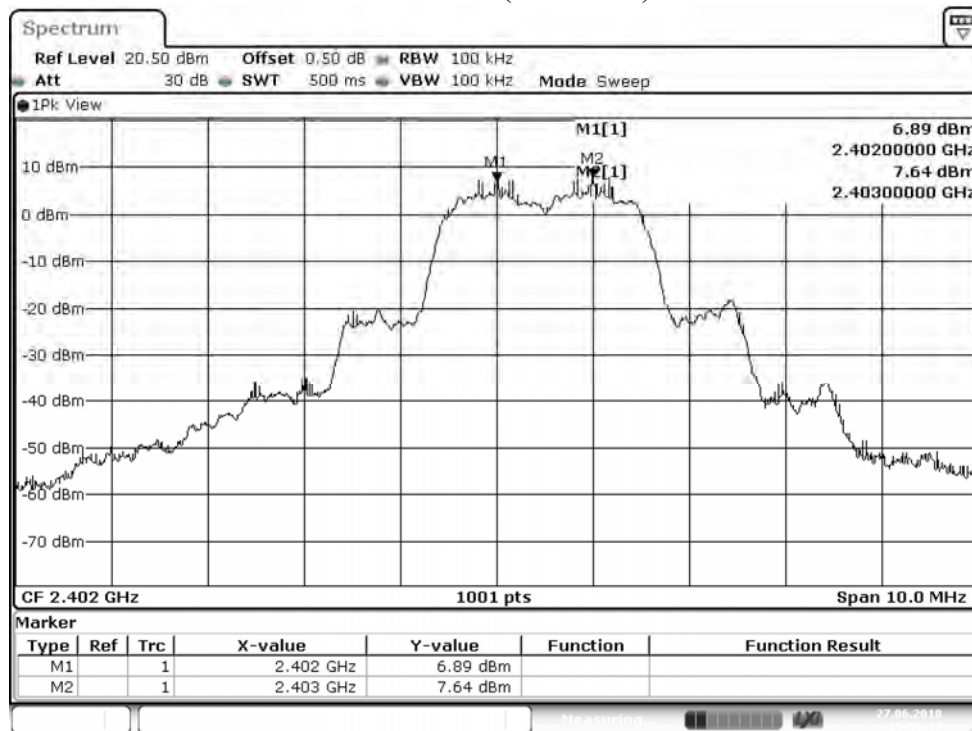
Channel 00 (2402MHz)



Channel 39 (2441MHz)

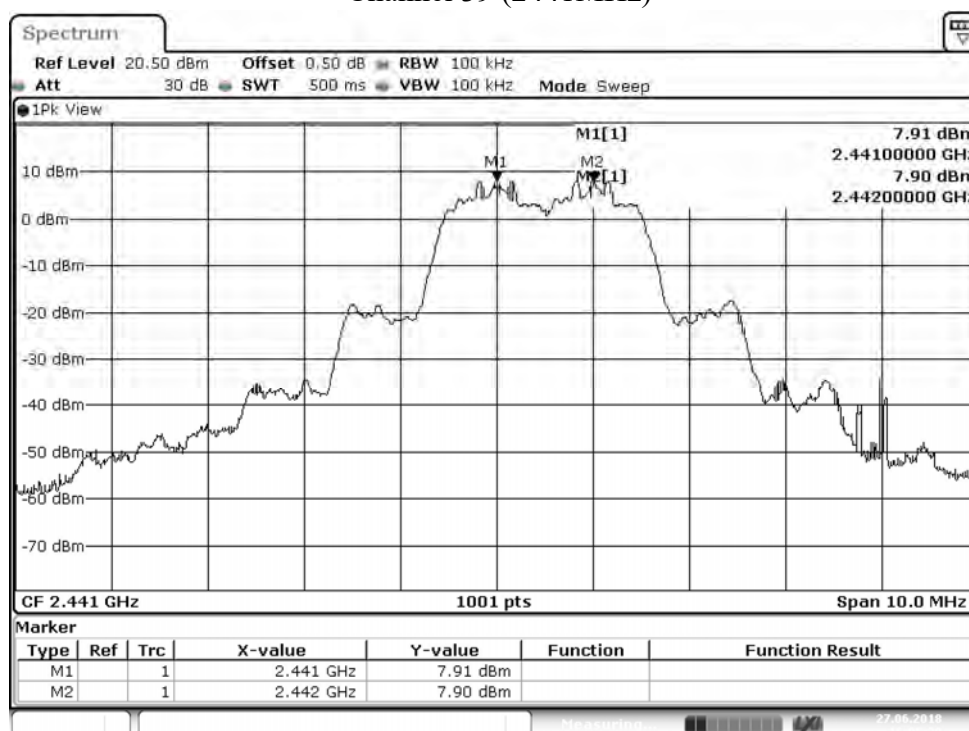


Channel 78 (2480MHz)

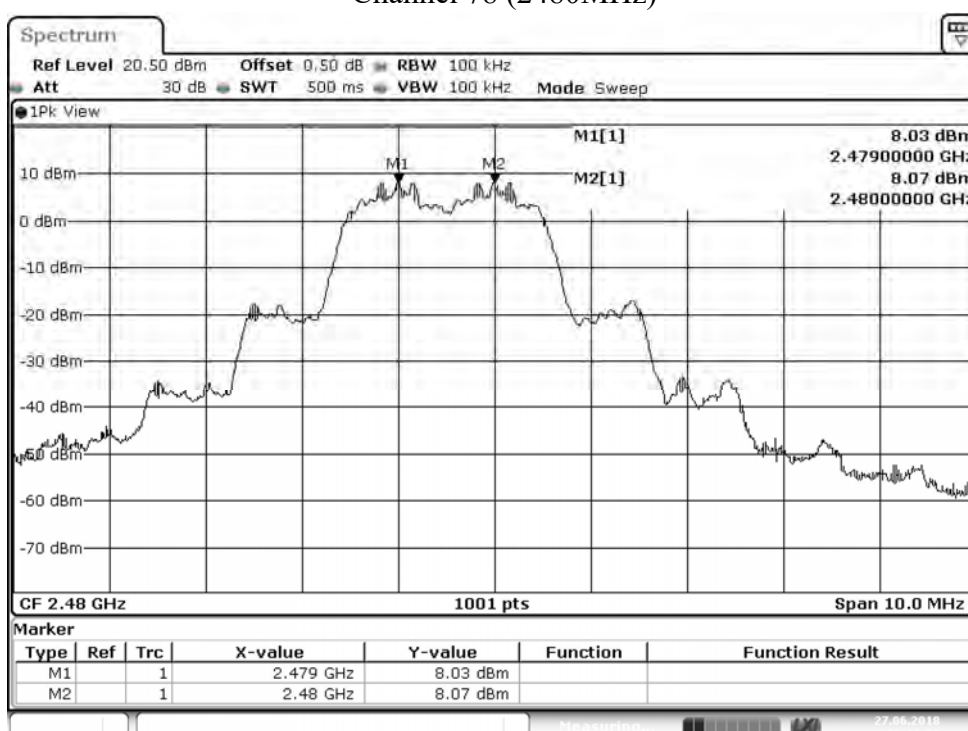

9. Dwell Time

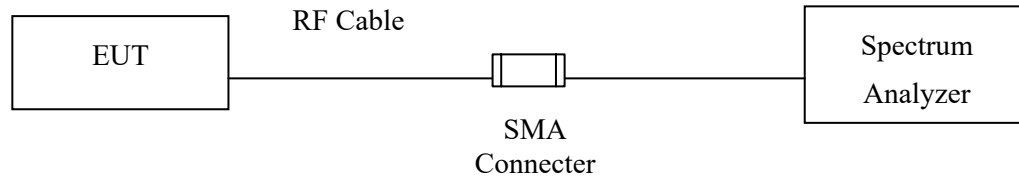9.1. Test Setup



9.2. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

9.3. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

9.4. Uncertainty

$\pm 2.31\text{msec}$

9.5. Test Result of Dwell Time


Product : Bluetooth Headset
 Test Item : Dwell Time
 Test Mode : Mode 1: Transmit - 1Mbps (Channel 00,39,78)

Frequency (MHz)	Time slot length (ms)	Hopping of Number	Sweep time (ms)	Duty cycle	Dwell Time (Sec)	Limit (Sec)	Result
2402	2.897	8	50	0.46	0.185	0.4	Pass
2441	2.897	8	50	0.46	0.185	0.4	Pass
2480	2.897	8	50	0.46	0.185	0.4	Pass


Duty cycle = ((Time slot length(ms)*Hopping of Number) / Sweep time (ms)

Dwell time = (Duty cycle /79) * (79*0.4)

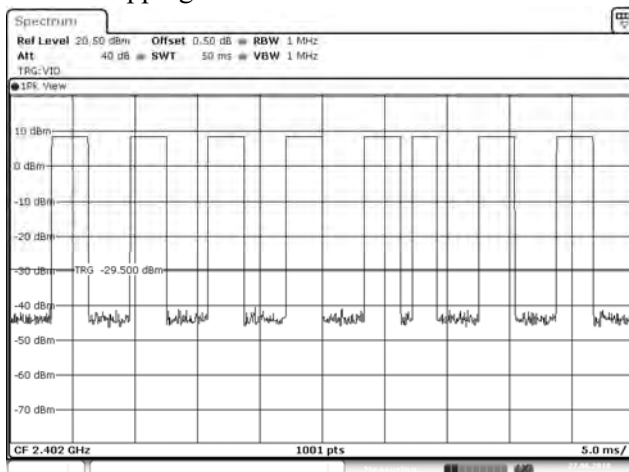
CH 00 Hopping of Number




CH 00 Time slot length

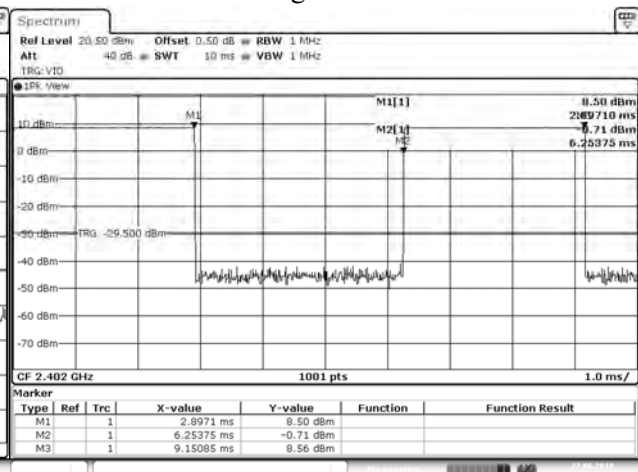


CH39 Hopping of Number

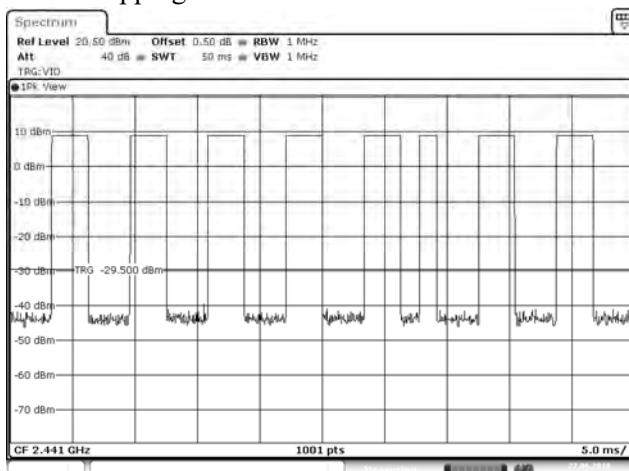


CH 39 Time slot length

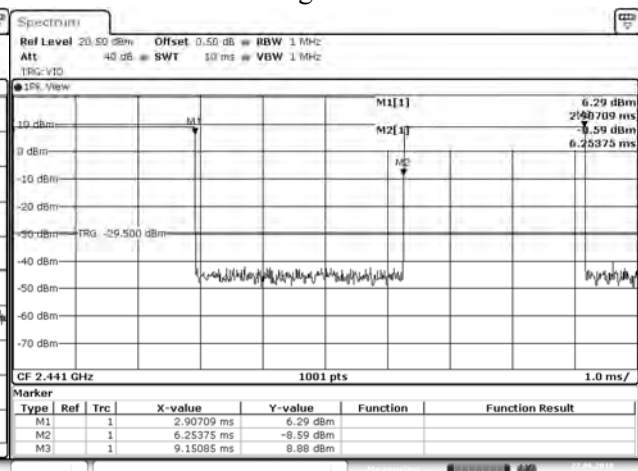

CH 78 Hopping of Number

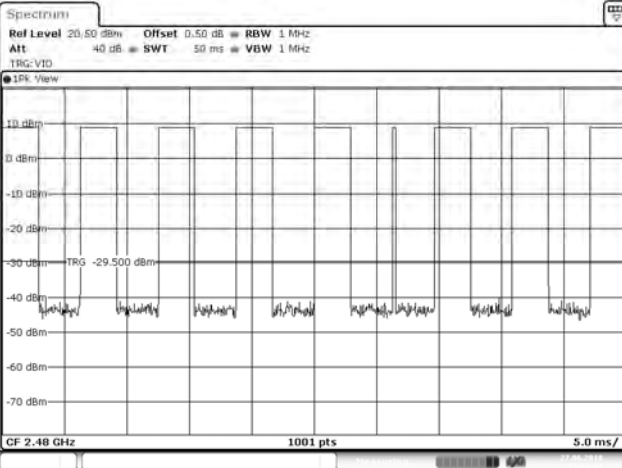

CH 78 Time slot length

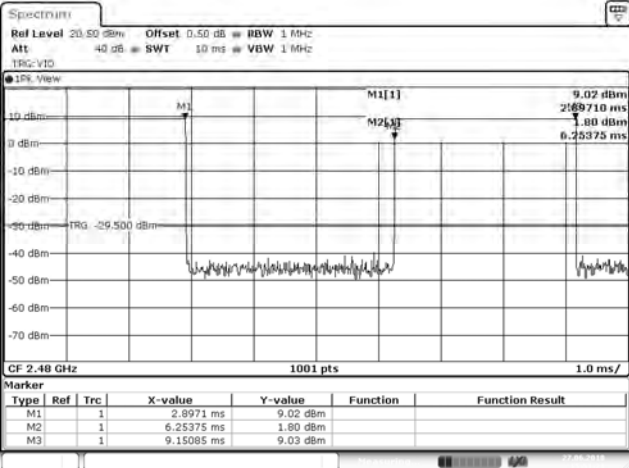

Note:
The dwell times of the packet type of DH1, DH3, and DH5 are tested. Only the worst case is shown on the report.


Product : Bluetooth Headset
 Test Item : Dwell Time
 Test Mode : Mode 3: Transmit - 3Mbps (Channel 00,39,78)

Frequency (MHz)	Time slot length (ms)	Hopping of Number	Sweep time (ms)	Duty cycle	Dwell Time (Sec)	Limit (Sec)	Result
2402	2.907	9	50	0.52	0.209	0.4	Pass
2441	2.907	8	50	0.47	0.186	0.4	Pass
2480	2.907	8	50	0.47	0.186	0.4	Pass


Duty cycle = ((Time slot length(ms)*Hopping of Number) / Sweep time (ms))

Dwell time = (Duty cycle / 79) * (79*0.4)

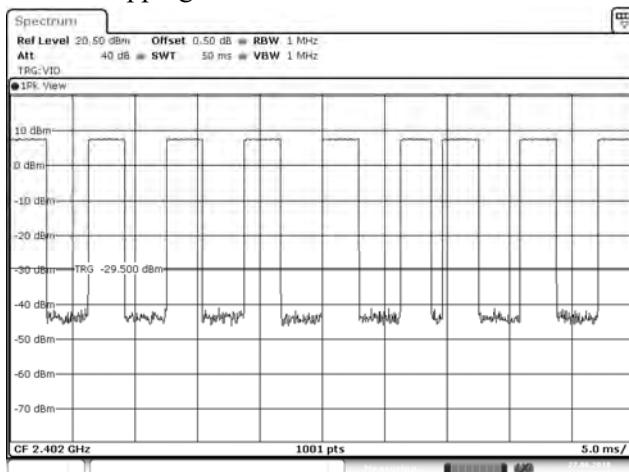
CH 00 Hopping of Number




CH 00 Time slot length

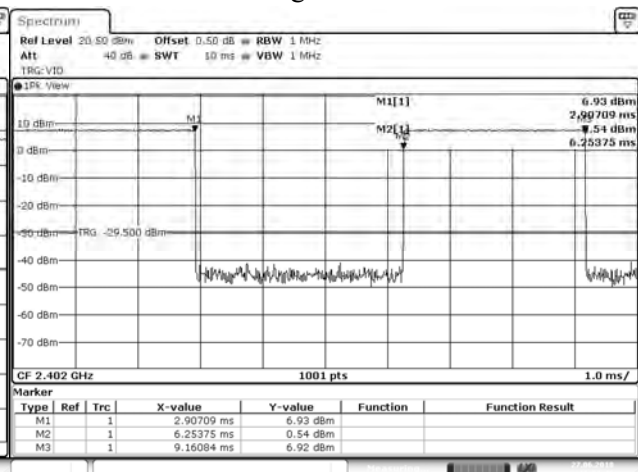

CH39 Hopping of Number

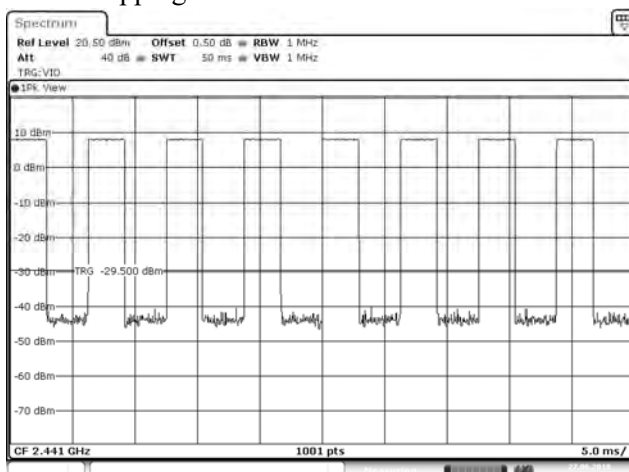


CH 39 Time slot length

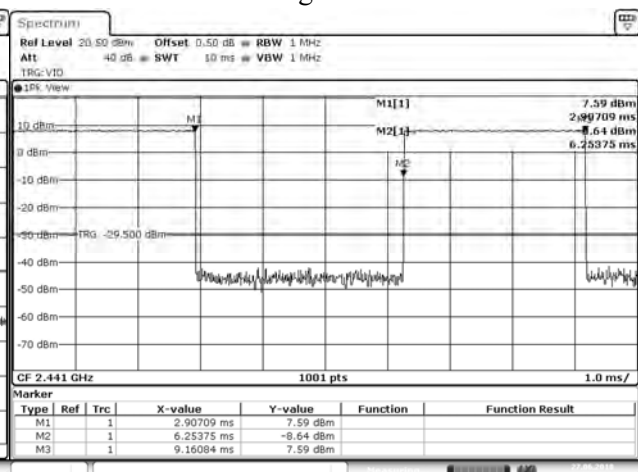

CH 78 Hopping of Number

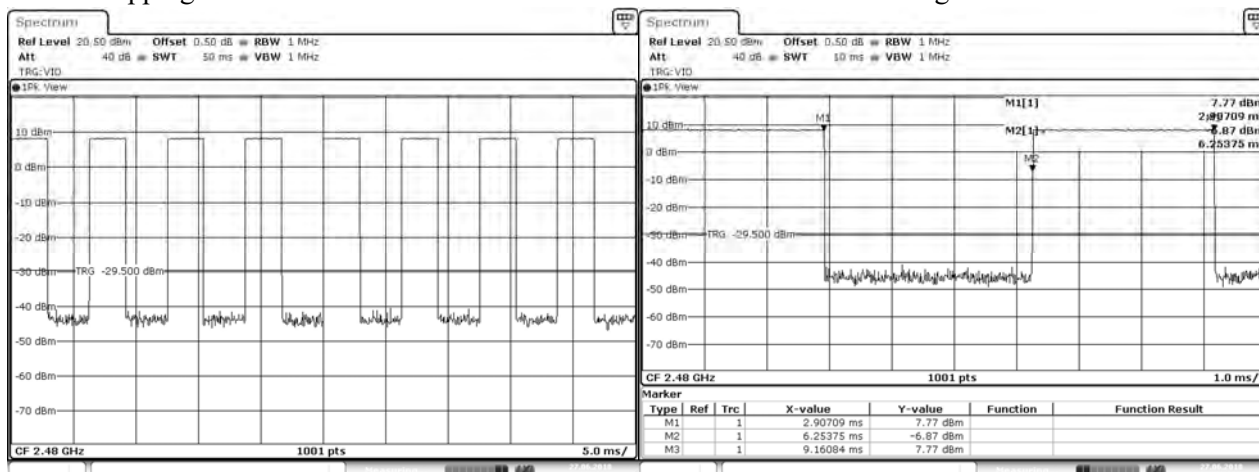CH 78 Time slot length




Note:

The dwell times of the packet type of DH1, DH3, and DH5 are tested. Only the worst case is shown on the report.

10. Occupied Bandwidth

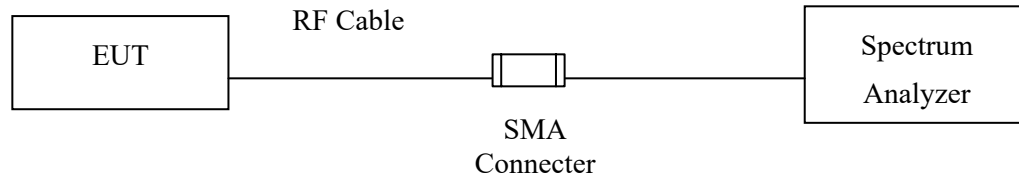10.1. Test Setup



10.2. Limits

N/A

10.3. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

10.4. Uncertainty

$\pm 279.2\text{Hz}$

10.5. Test Result of Occupied Bandwidth

Product : Bluetooth Headset
 Test Item : Occupied Bandwidth Data
 Test Mode : Mode 1: Transmit - 1Mbps

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	948	--	NA
39	2441	945	--	NA
78	2480	945	--	NA

Figure Channel 00:

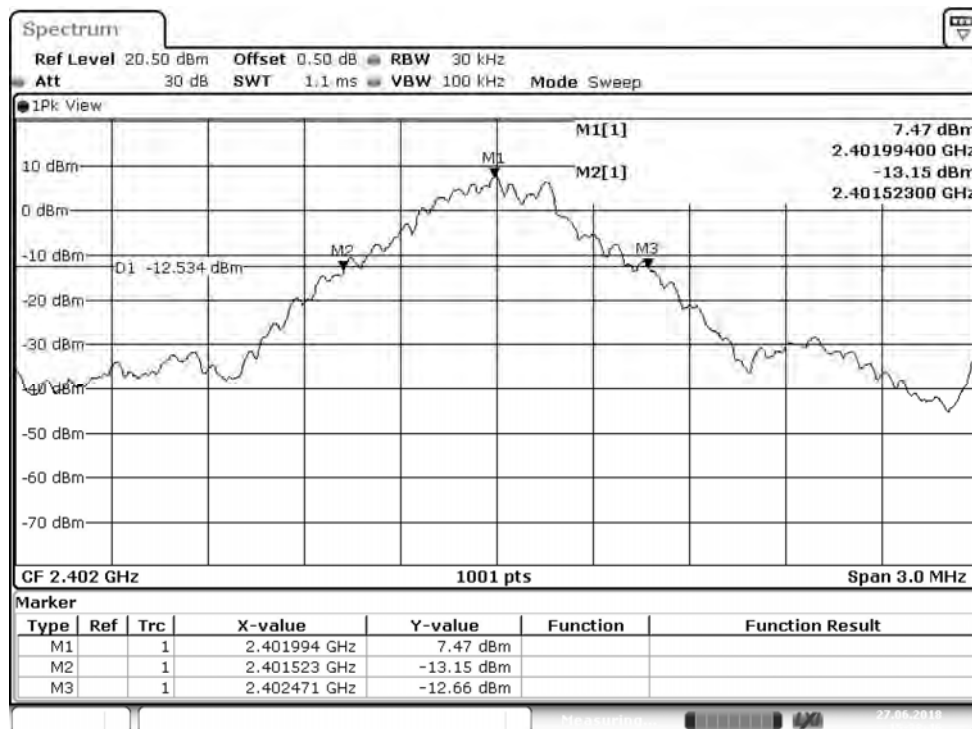


Figure Channel 39:


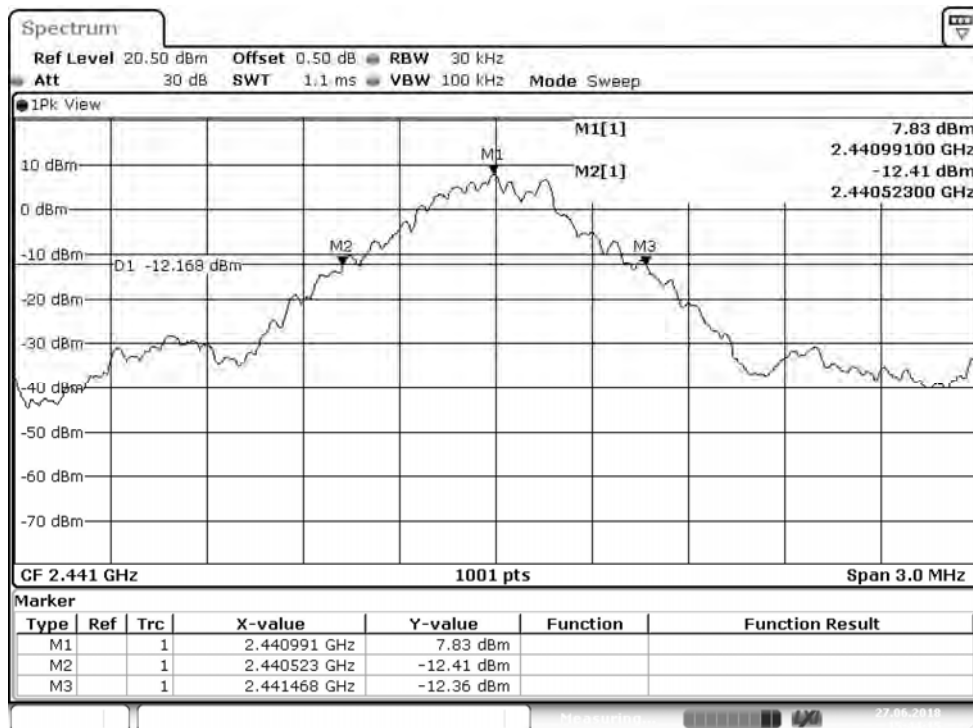


Figure Channel 78:

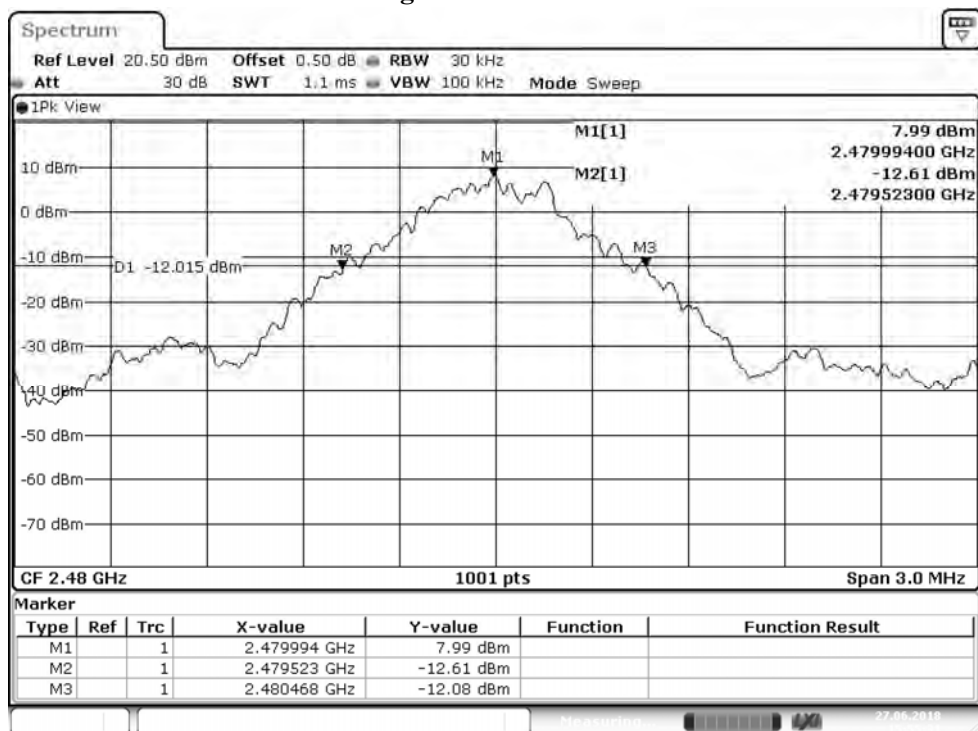

Product : Bluetooth Headset
 Test Item : Occupied Bandwidth Data
 Test Mode : Mode 2: Transmit - 2Mbps

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	1280	--	NA
39	2441	1289	--	NA
78	2480	1286	--	NA

Figure Channel 00:

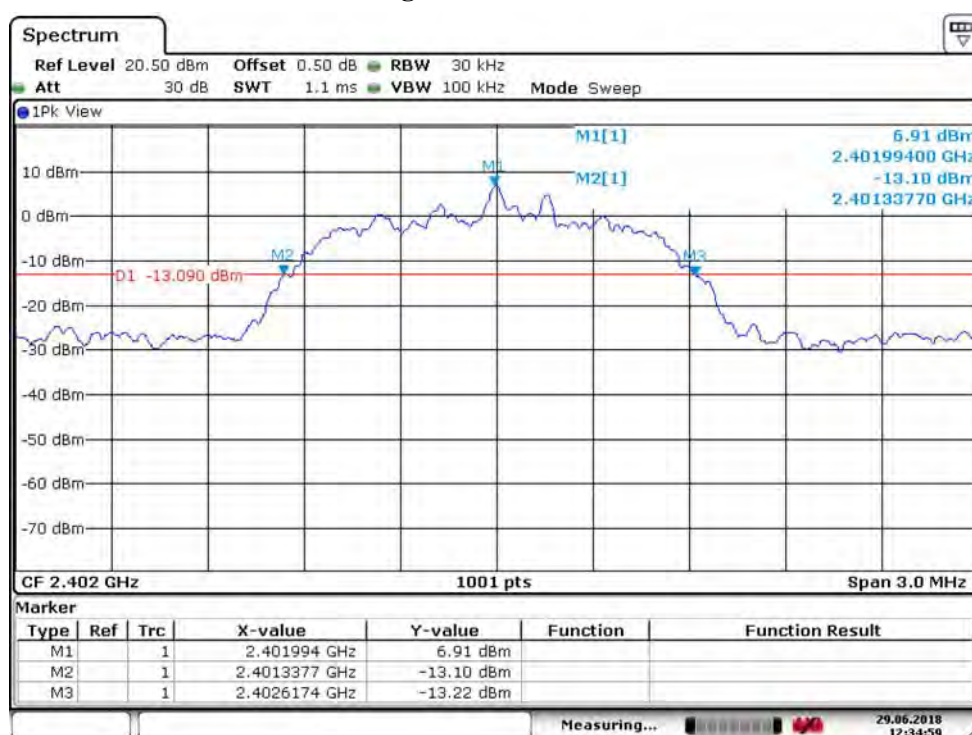


Figure Channel 39:


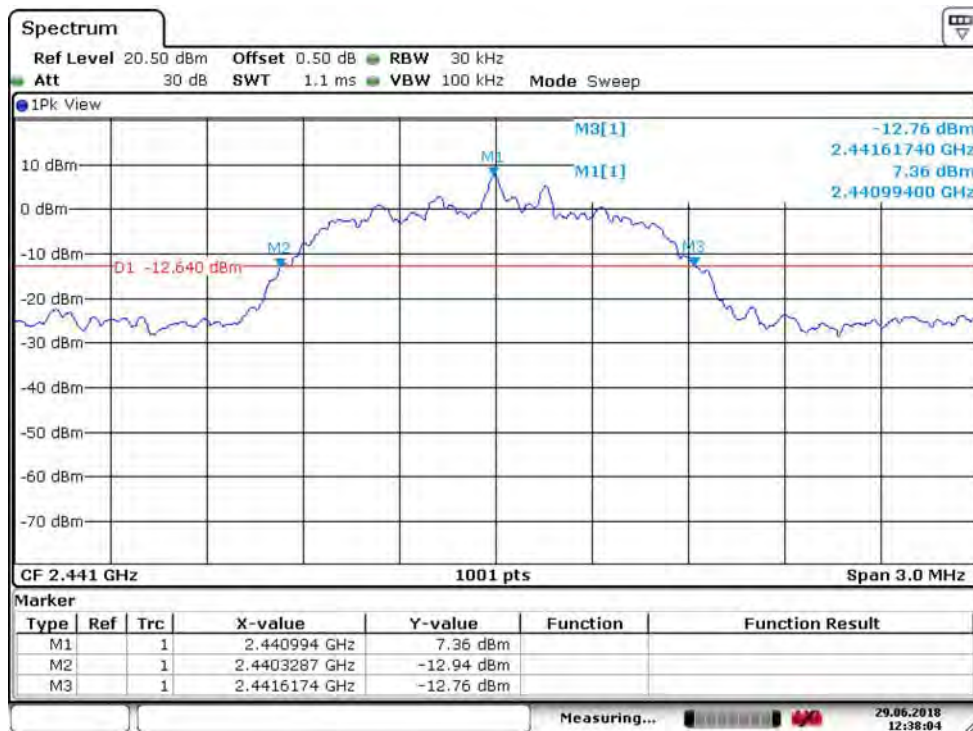


Figure Channel 78:

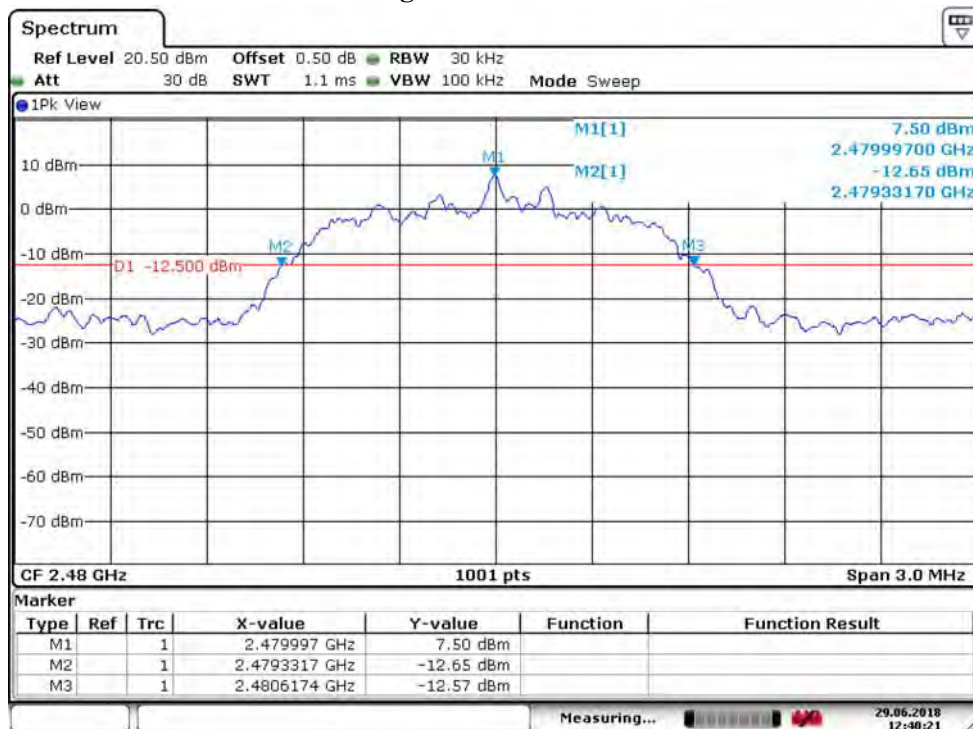

Product : Bluetooth Headset
 Test Item : Occupied Bandwidth Data
 Test Mode : Mode 3: Transmit - 3Mbps

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	1266	--	NA
39	2441	1269	--	NA
78	2480	1269	--	NA

Figure Channel 00:

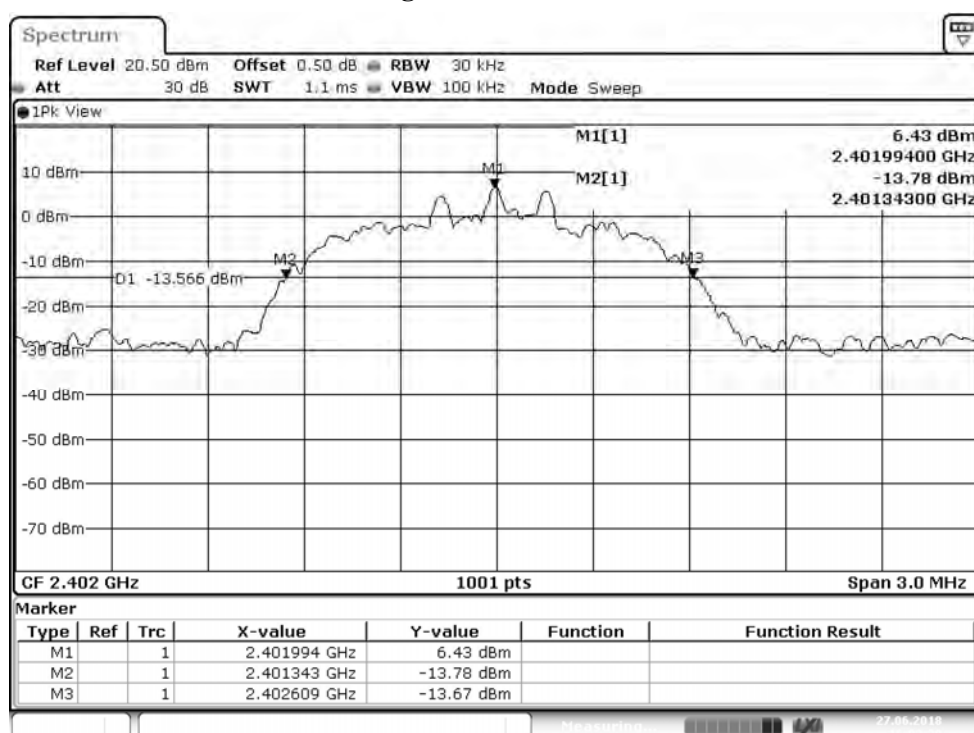


Figure Channel 39:


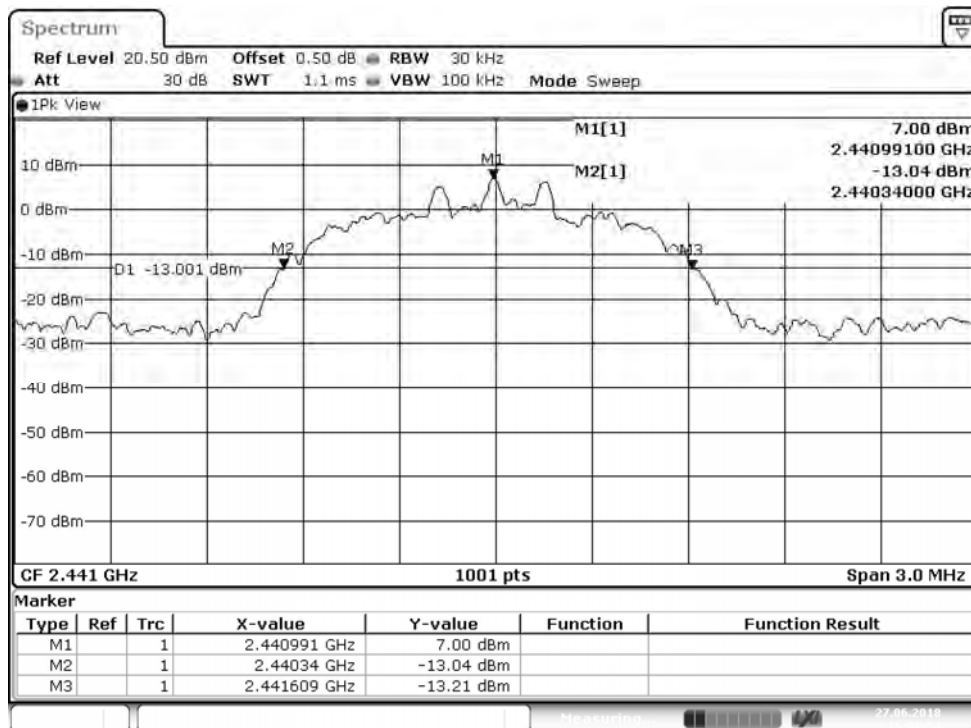


Figure Channel 78:

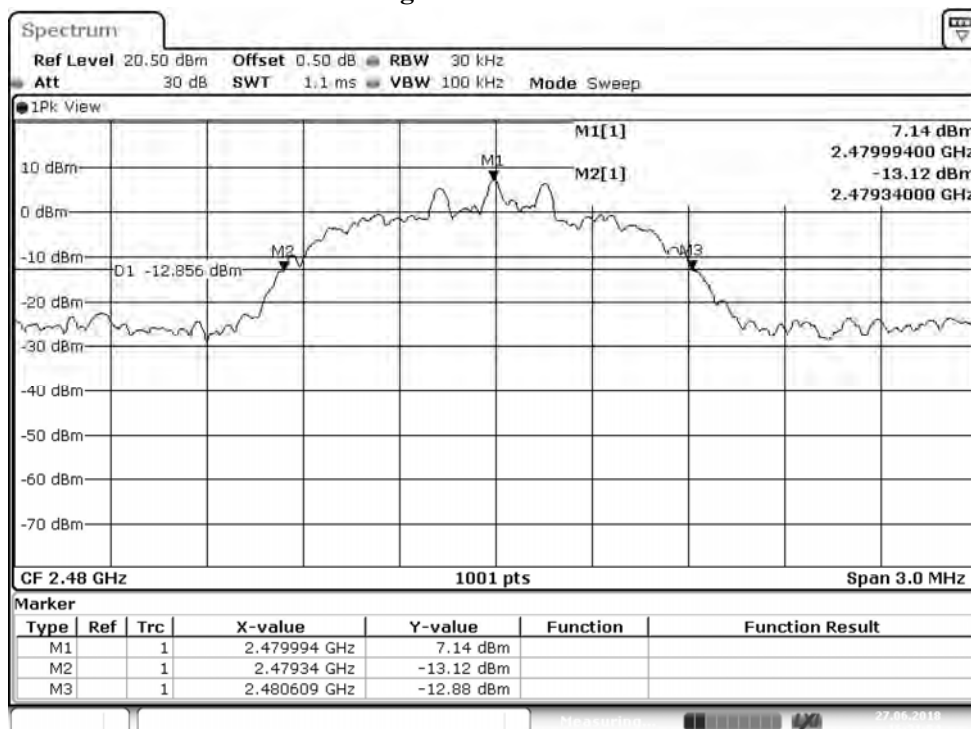

11. EMI Reduction Method During Compliance Testing

No modification was made during testing.