


Appendix B

Peak Output Power




Marker 1 [T1] RBW 1 MHz RF Att 40 dB
Ref Lvl 2.87 dBm VBW 1 MHz
20 dBm 2.40185271 GHz SWT 5 ms Unit dBm

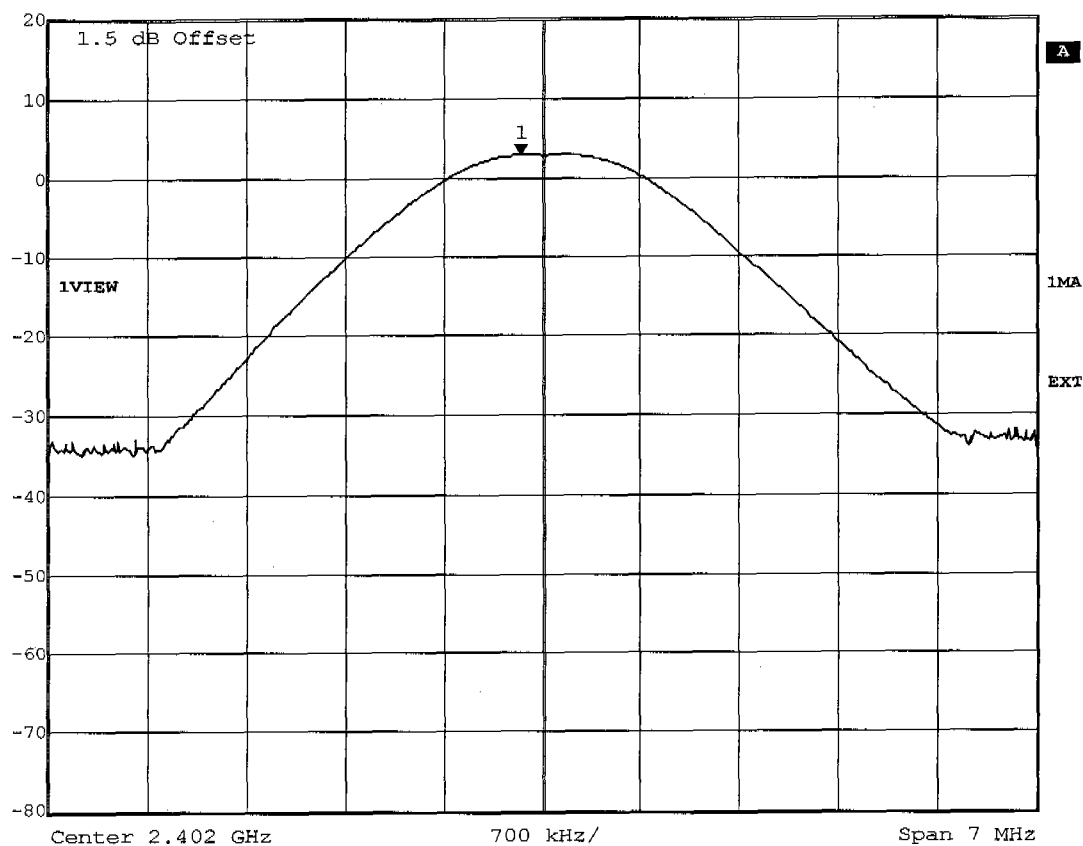

Title: Peak Output Power conducted Ch.: 0
Comment A: Jabra JX10
Date: 22.APR.2005 12:38:21




Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
20 dBm	2.47 dBm	VBW	1 MHz		
	2.44107715 GHz	SWT	5 ms	Unit	dBm

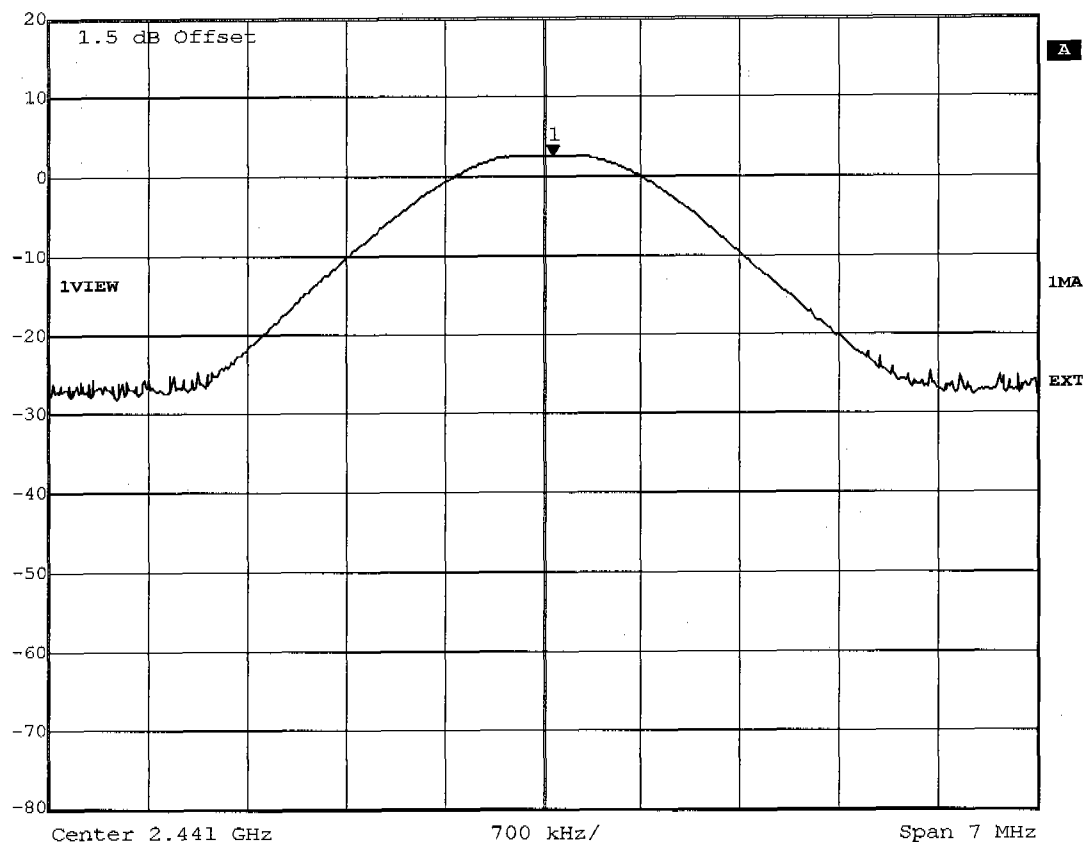

Title: Peak Output Power conducted Ch.: 39
Comment A: Jabra JX10
Date: 22.APR.2005 12:39:07



Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
Ref Lvl	1.27 dBm	VBW	1 MHz	
20 dBm	2.48014729 GHz	SWT	5 ms	Unit dBm

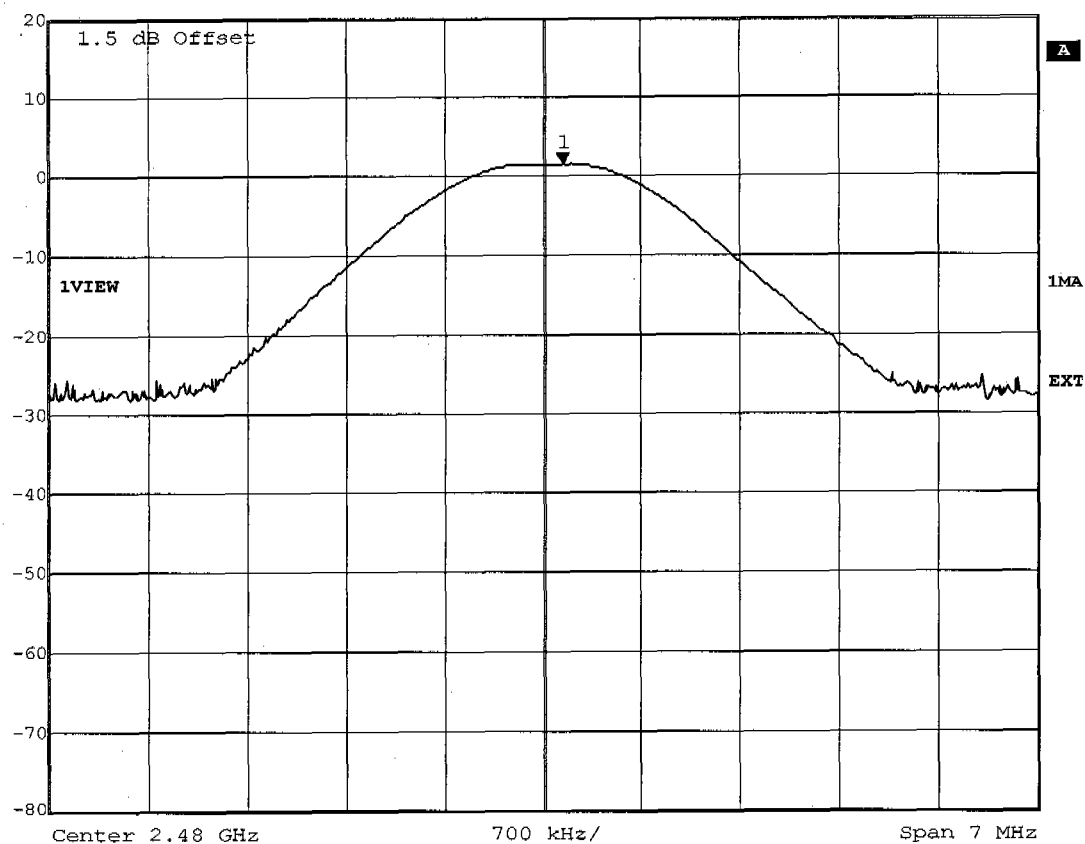

Title: Peak Output Power conducted Ch.: 78
Comment A: Jabra JX10
Date: 22.APR.2005 12:40:01


Appendix C

Spurious Emissions radiated - Transmitter operating

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2402 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Emax: 93.77dBµV/m, RBW: 100kHz

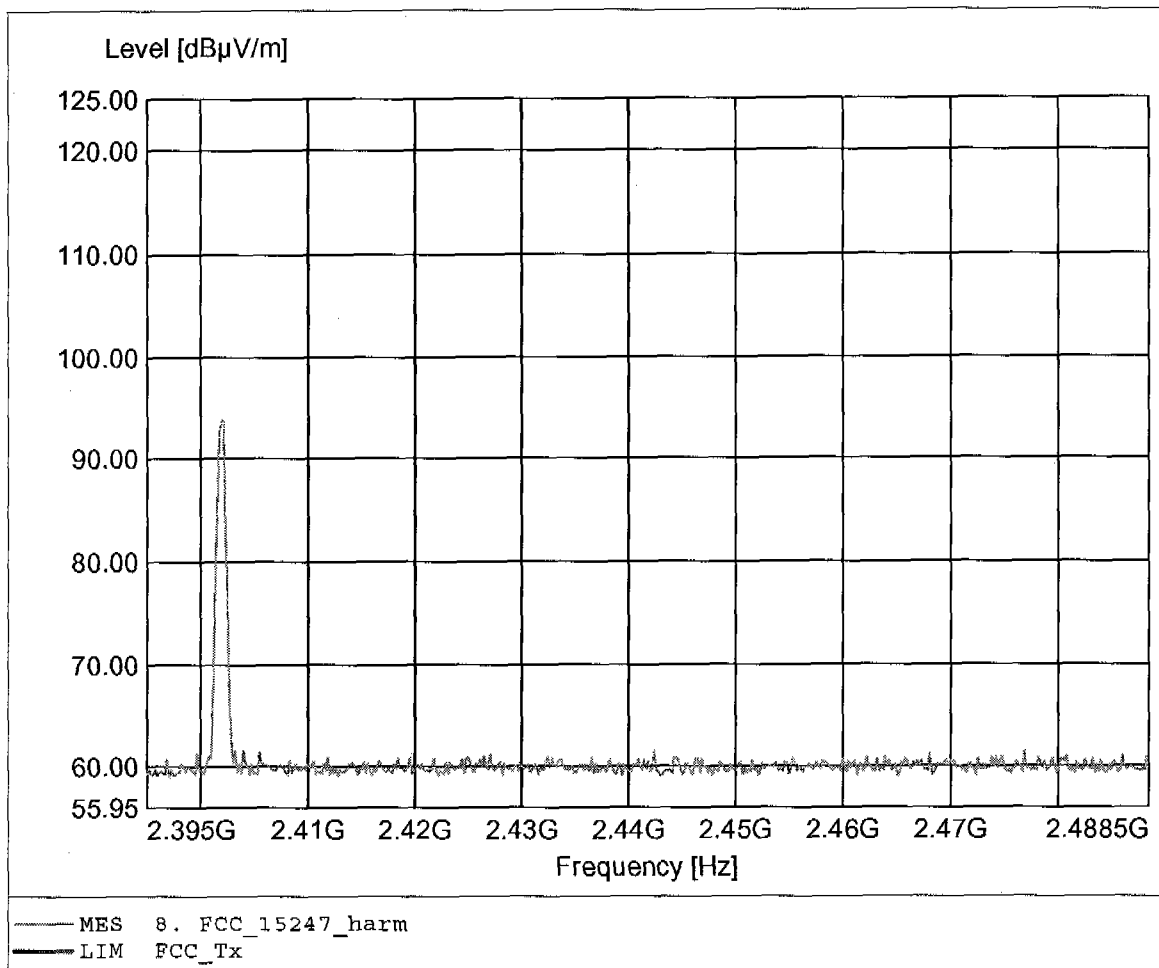

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2402 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 200.000MHz, Emax: 32.38dBµV/m, RBW: 100kHz

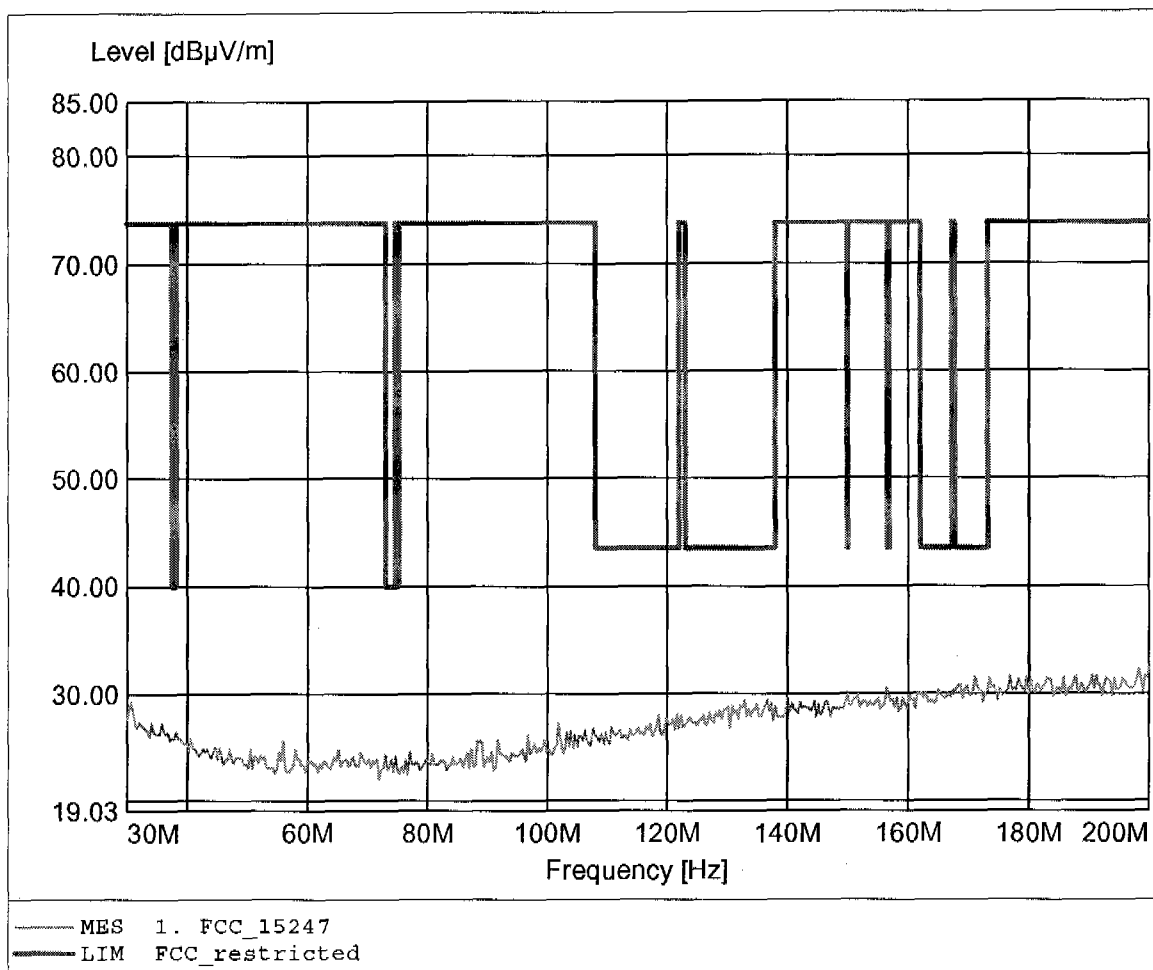

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2402 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 193.868MHz, Emax: 33.47dBµV/m, RBW: 100kHz

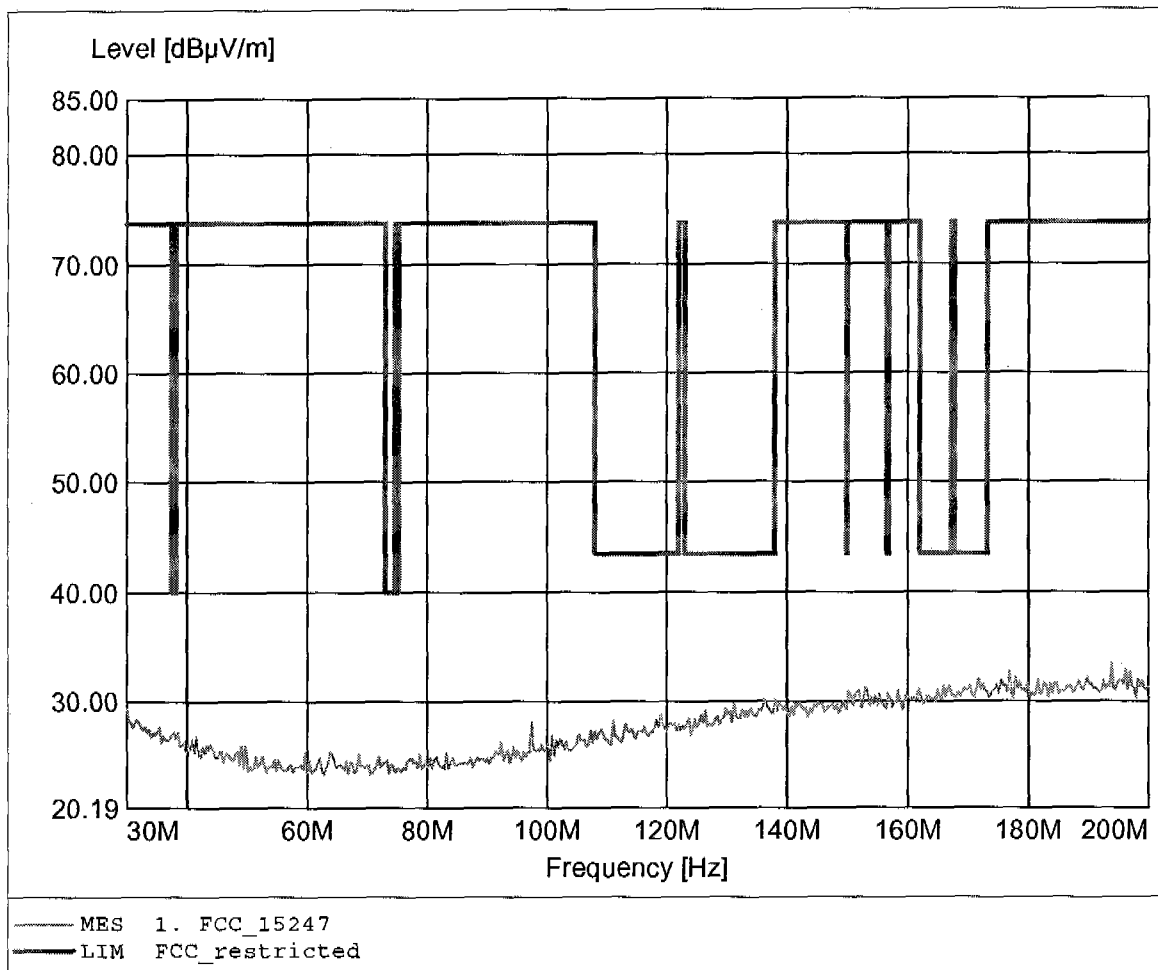

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2402 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 801.202MHz, Emax: 24.02dBµV/m, RBW: 100kHz

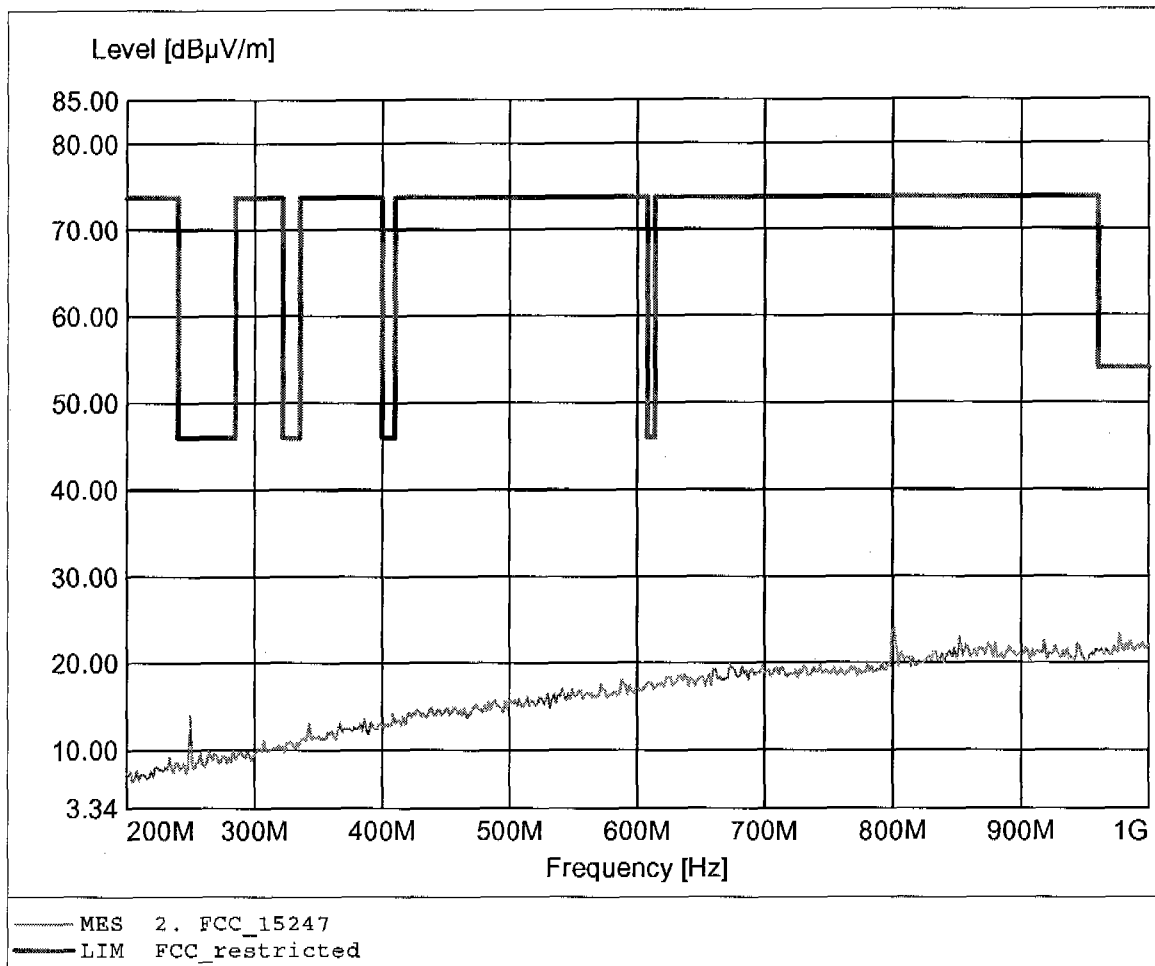

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2402 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 801.202MHz, Emax: 23.53dBµV/m, RBW: 100kHz

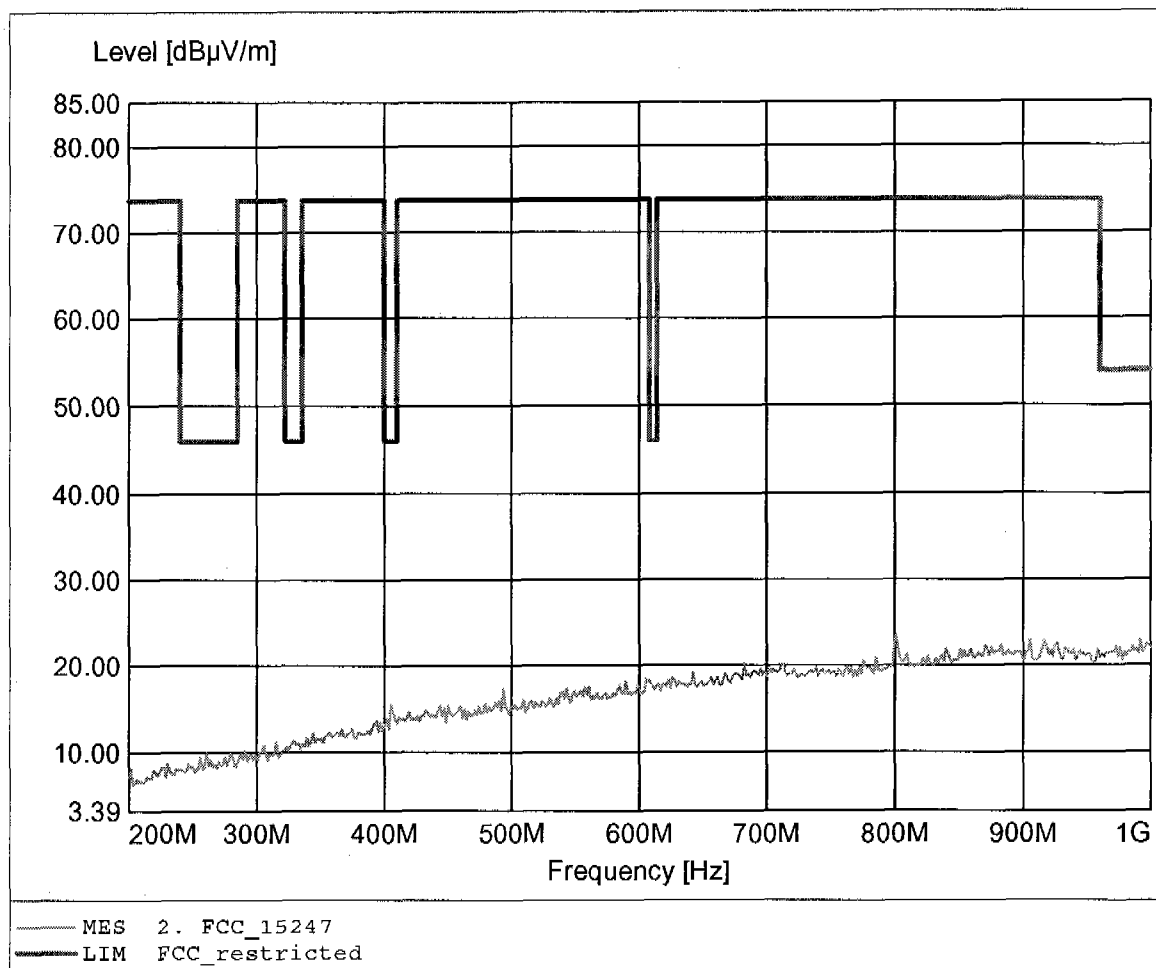

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile.
EUT: Jabra Headset JX10 / 2402 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.603GHz, Emax: 47.06dBµV/m, RBW: 1MHz

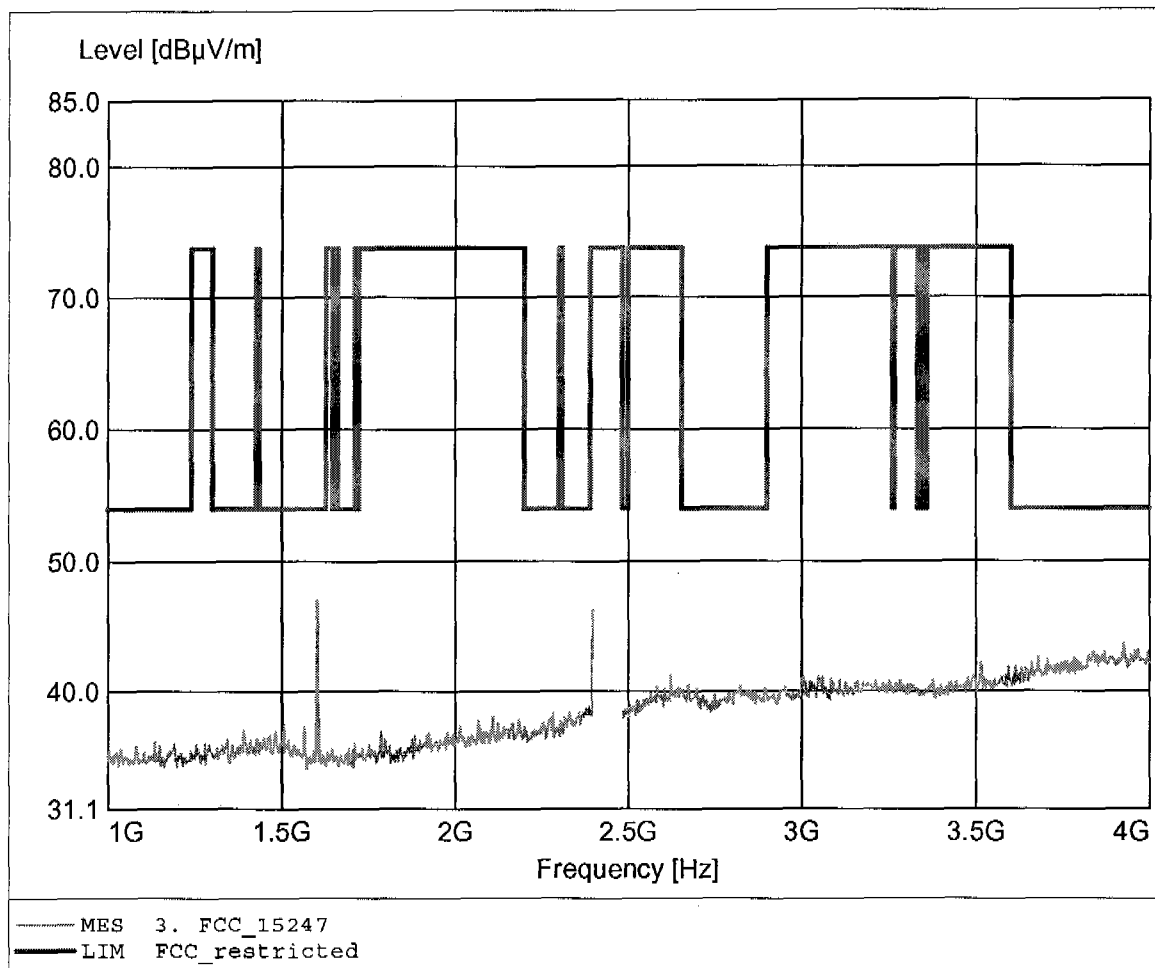

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2402 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 51.51dBµV/m, RBW: 1MHz

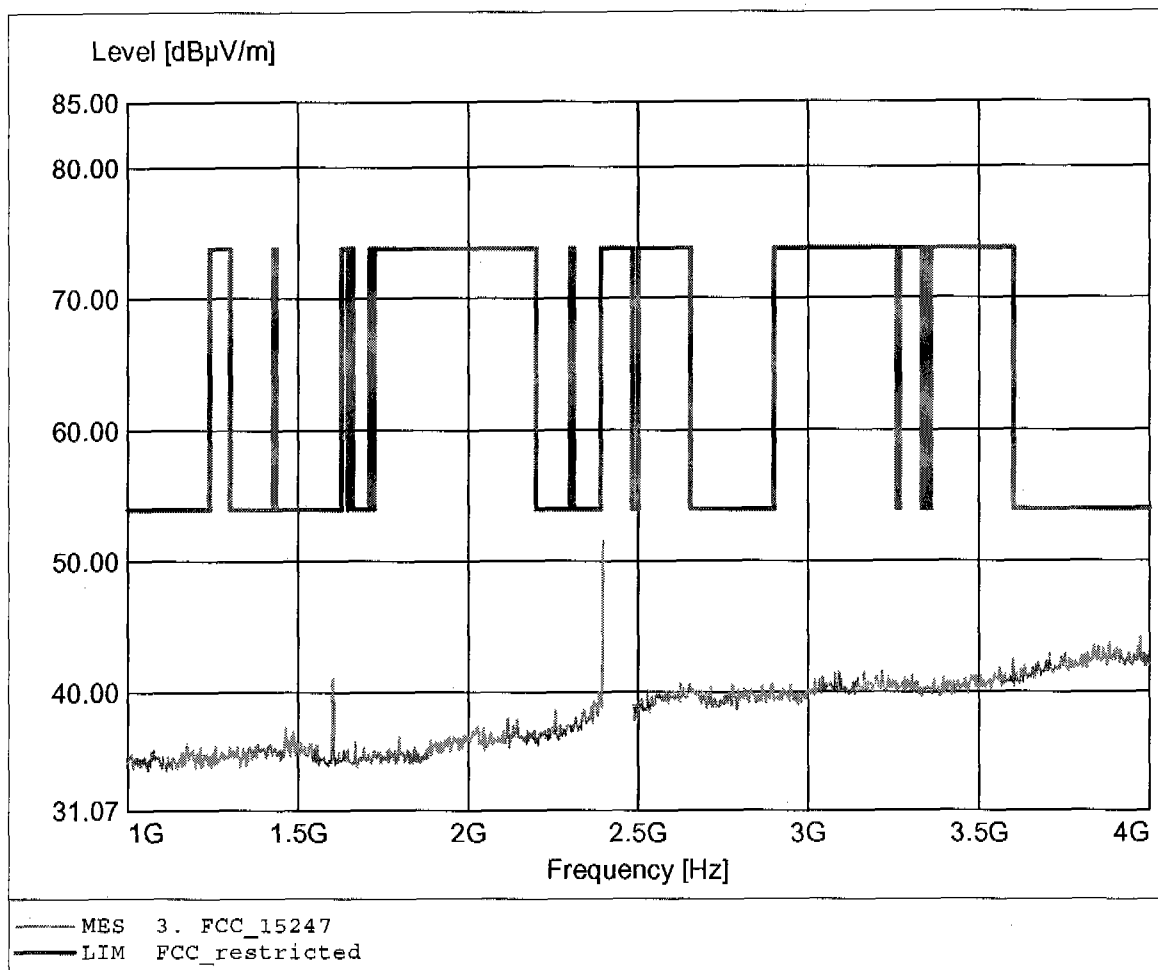

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2402 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 49.43dBµV/m, RBW: 1MHz

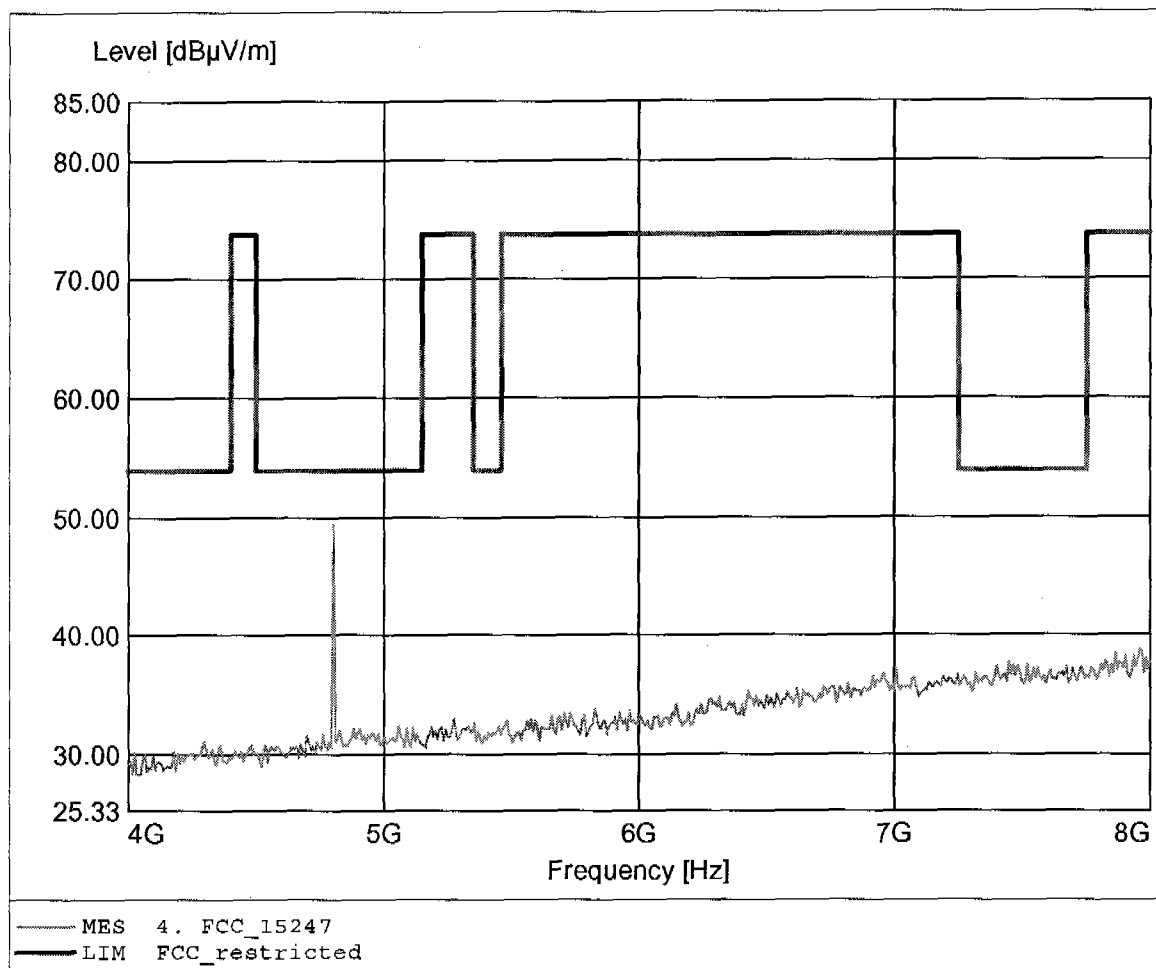

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2402 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 49.19dBuV/m, RBW: 1MHz

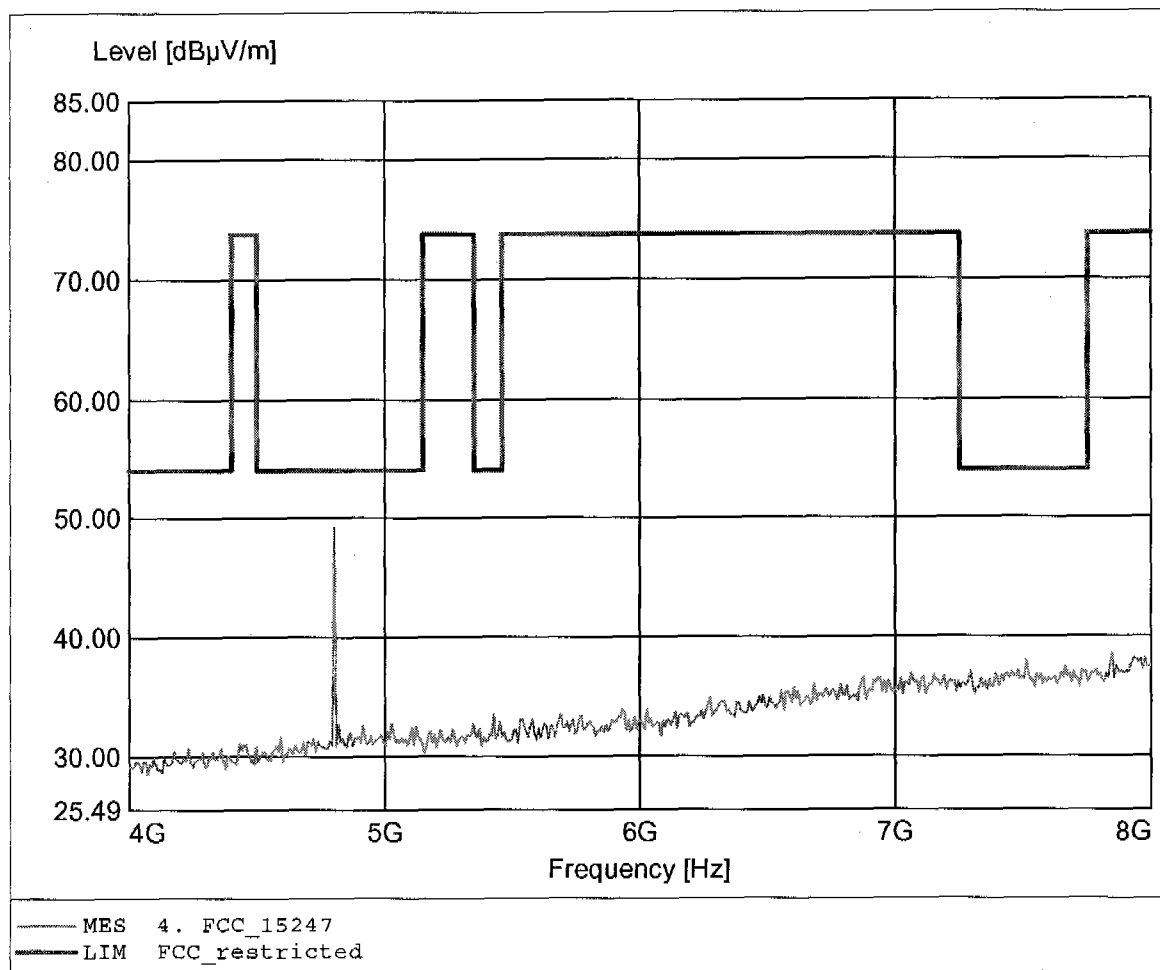

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2402 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.006GHz, Emax: 42.26dBµV/m, RBW: 1MHz

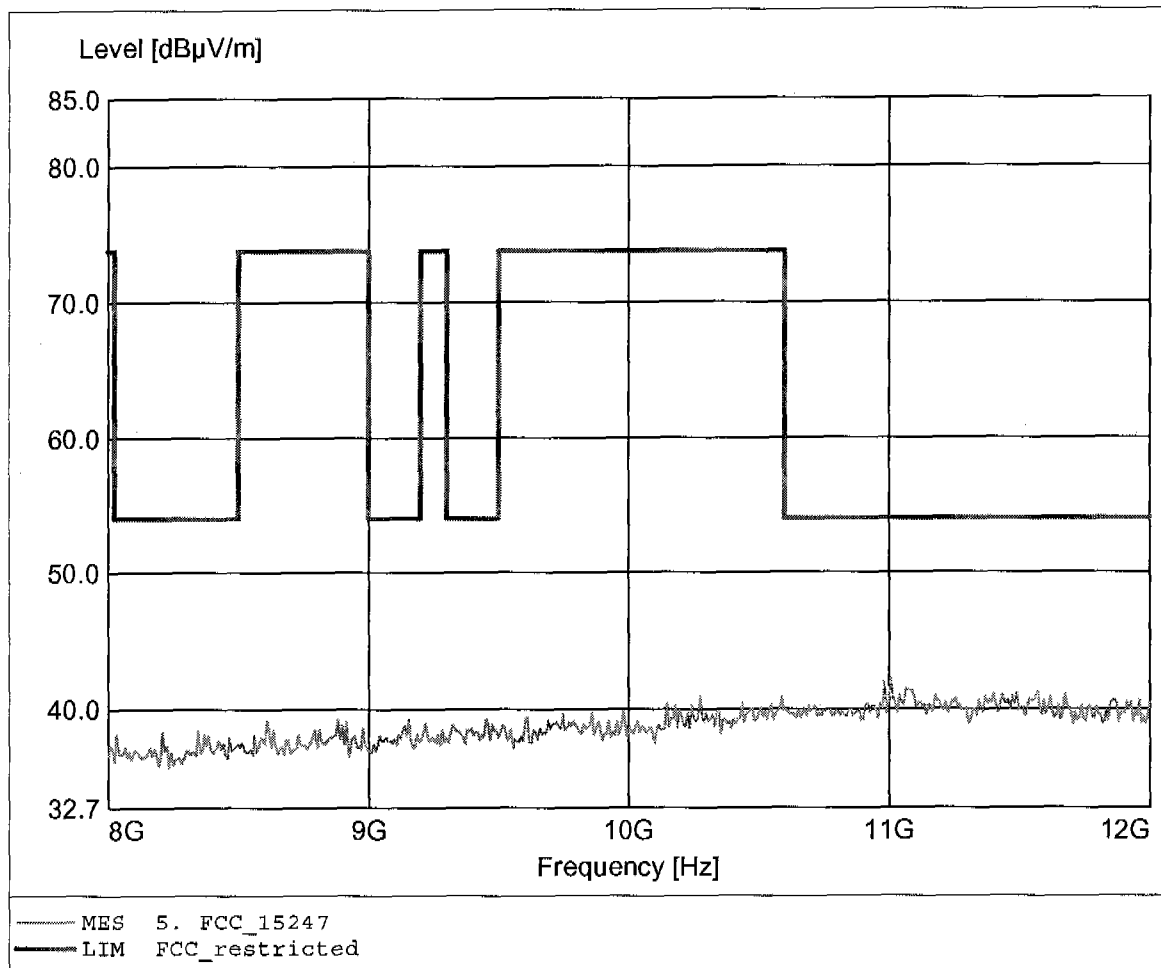

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2402 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.359GHz, Emax: 42.68dBμV/m, RBW: 1MHz

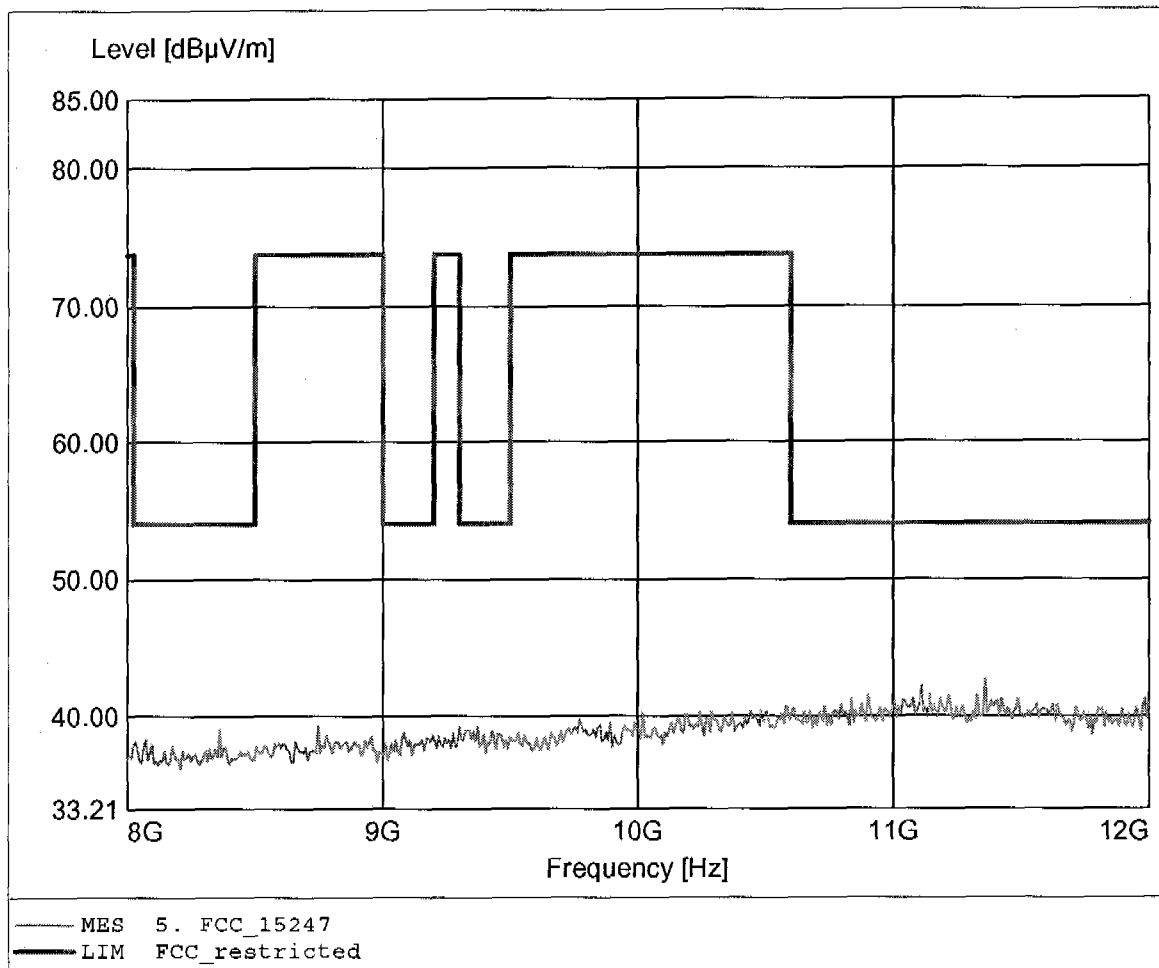

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2402 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.595GHz, Emax: 44.88dBμV/m, RBW: 1MHz

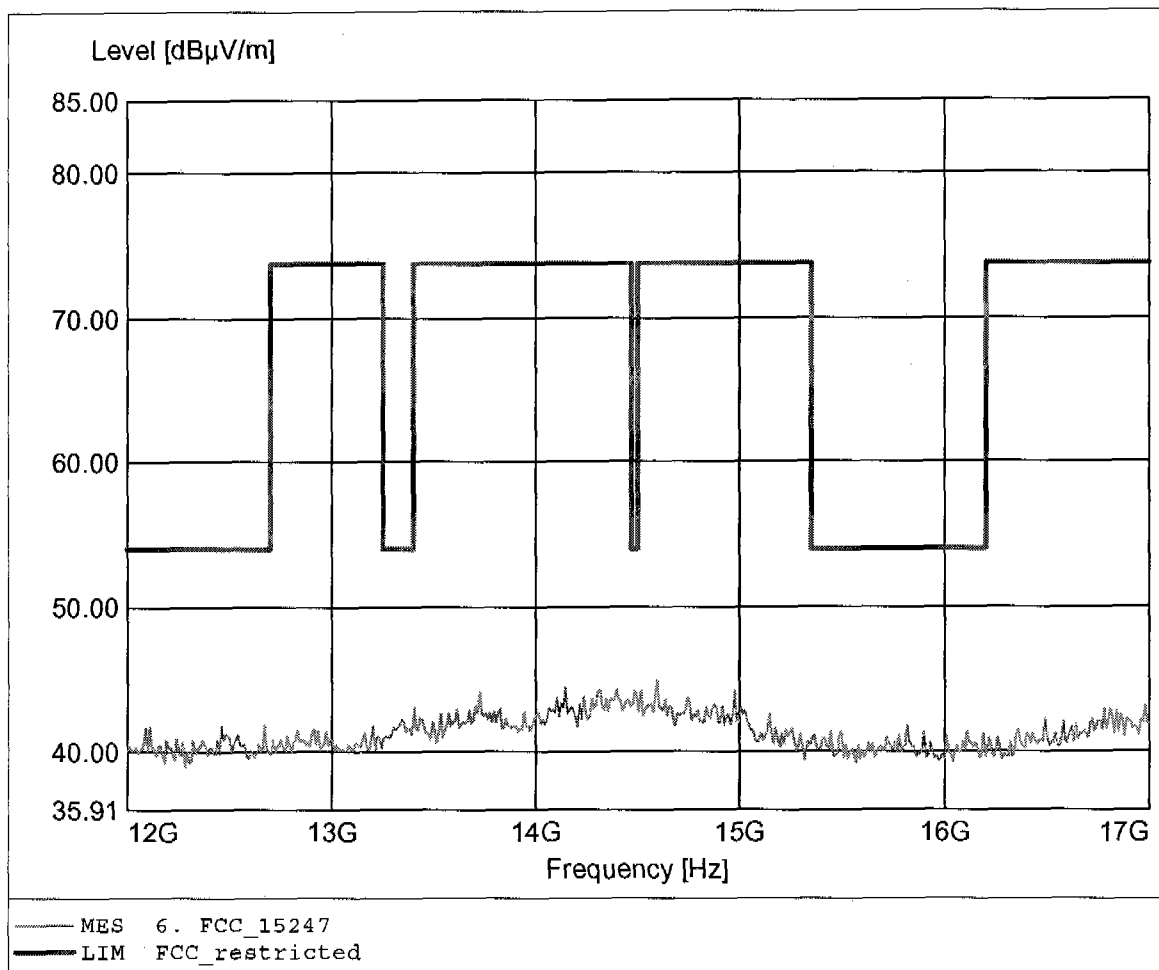

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2402 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.435GHz, Emax: 44.51dBµV/m, RBW: 1MHz

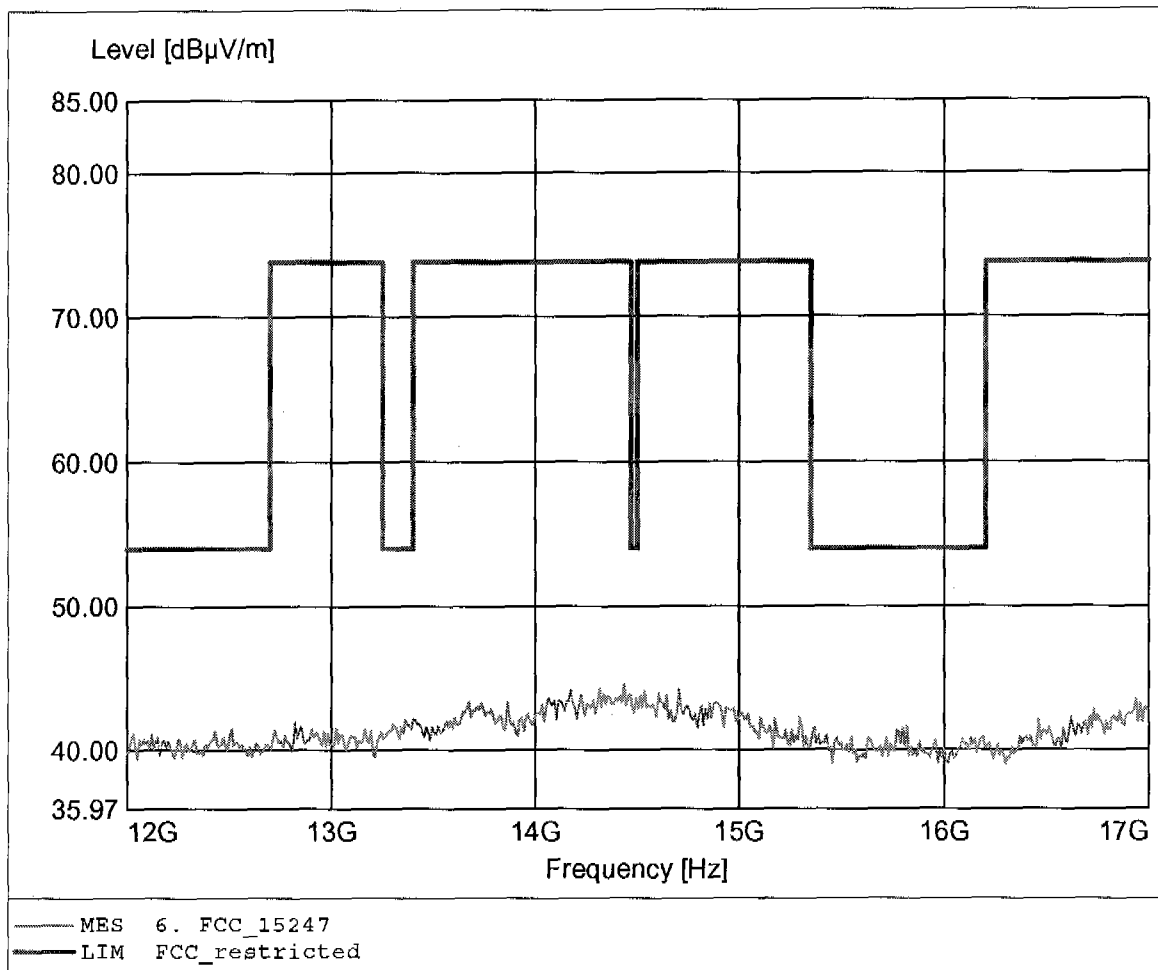

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2402 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 45.31dBuV/m, RBW: 1MHz

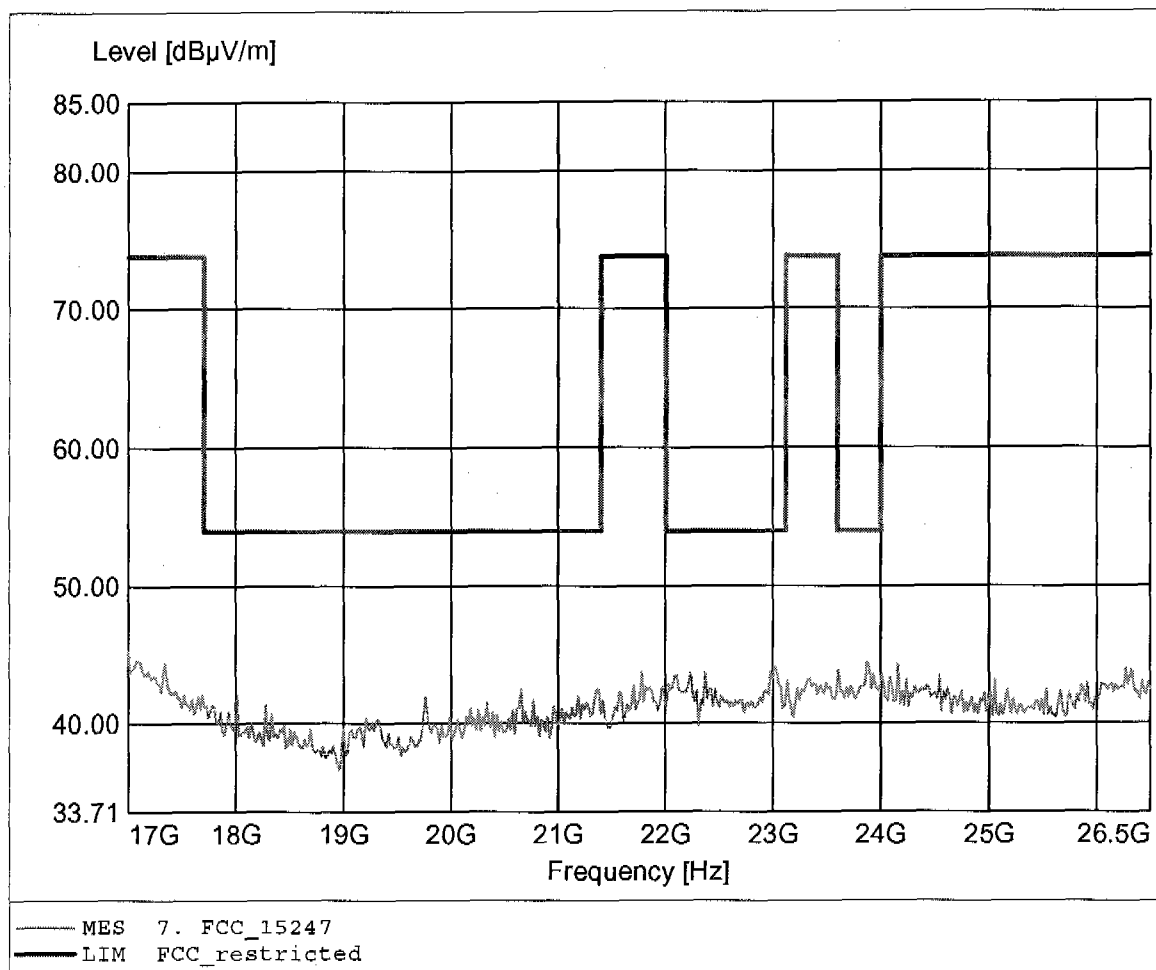

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2402 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.209GHz, Emax: 44.91dBµV/m, RBW: 1MHz

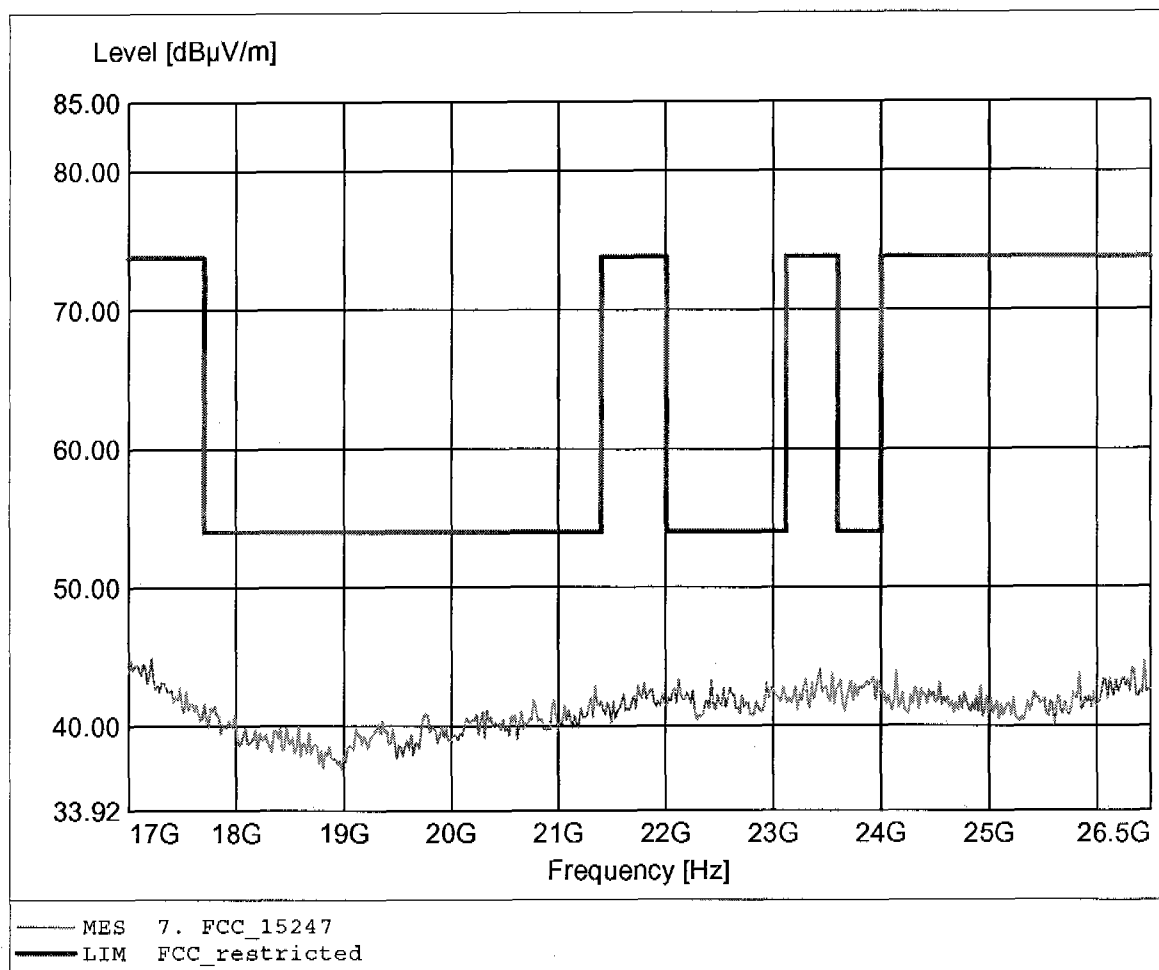

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2441 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 186.713MHz, Emax: 32.68dBµV/m, RBW: 100kHz

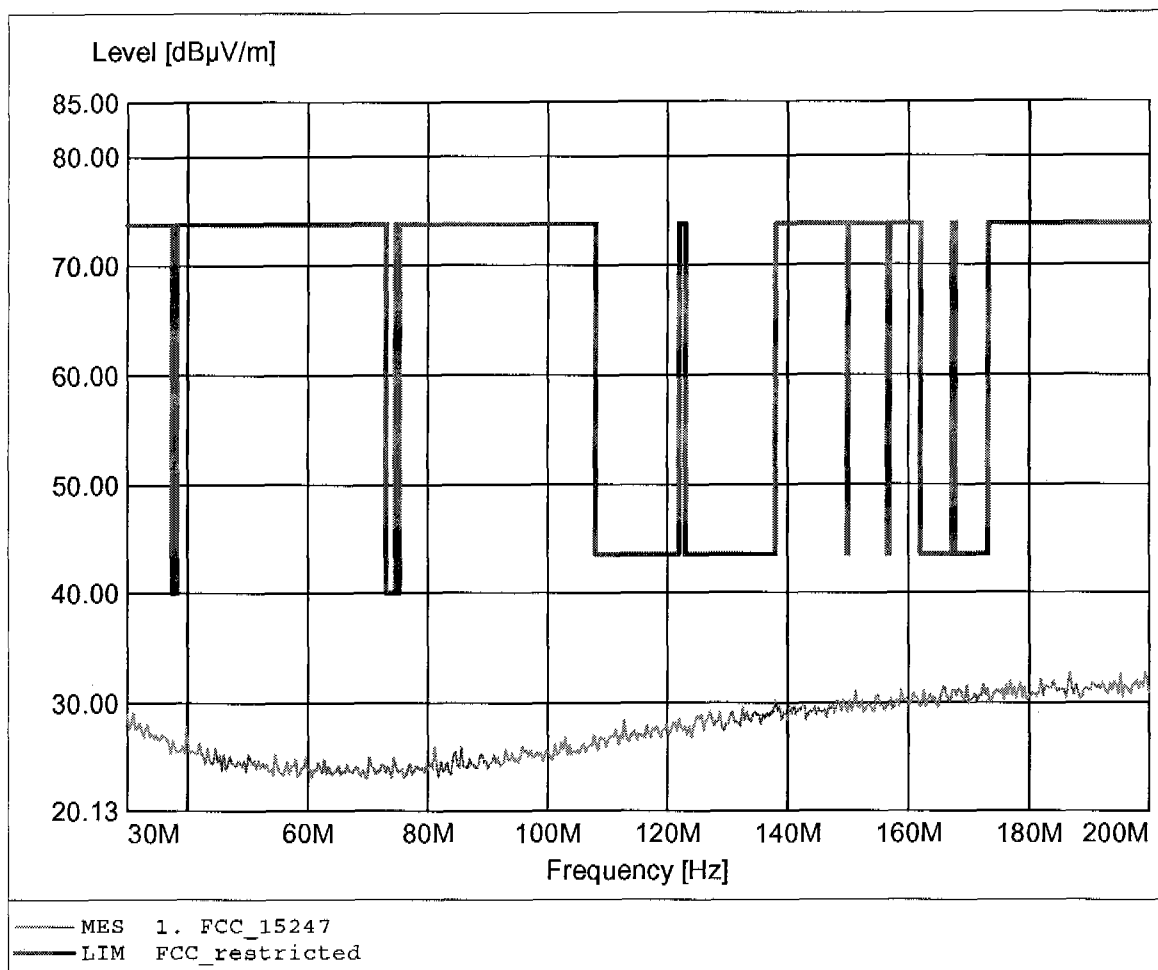

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2441 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 189.439MHz, Emax: 32.80dBµV/m, RBW: 100kHz

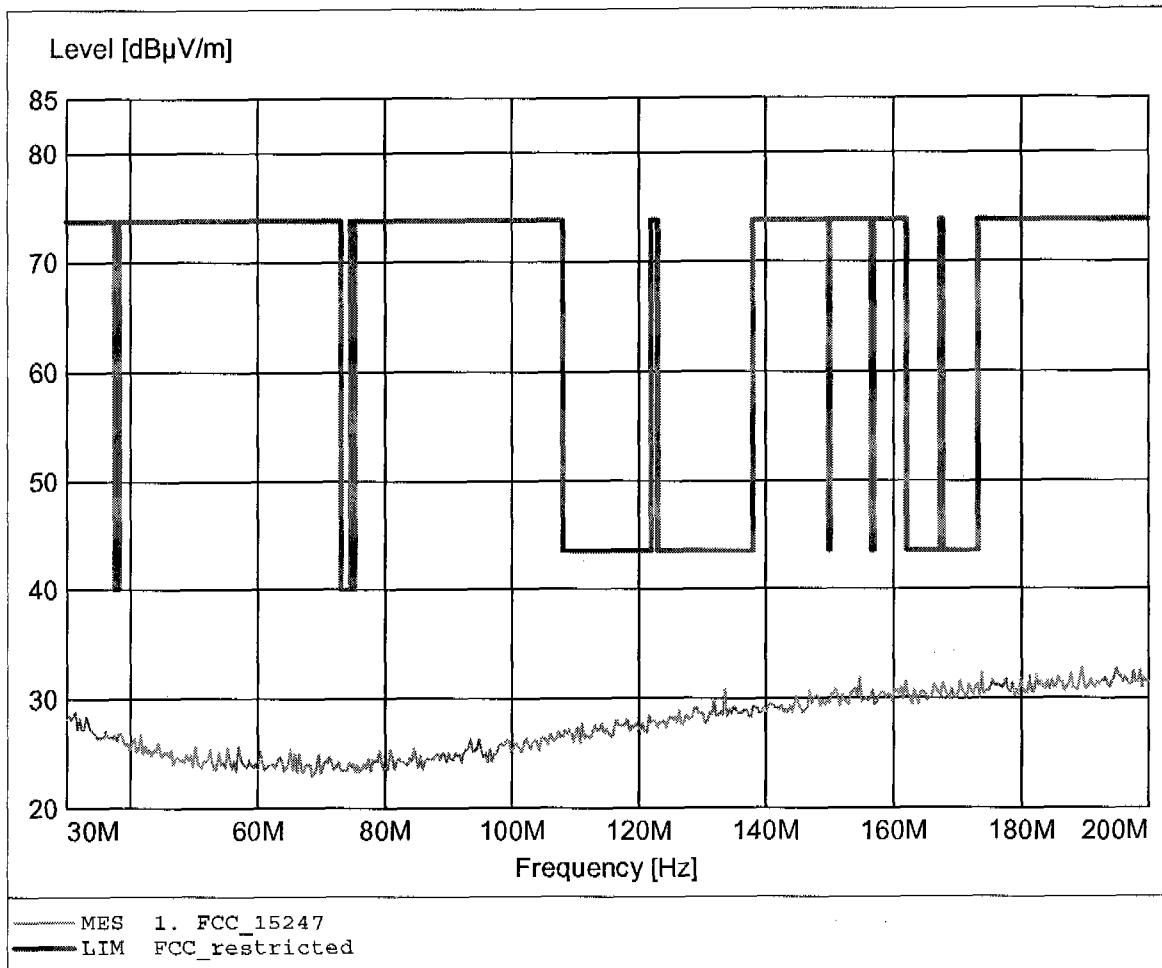

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2441 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 890.982MHz, Emax: 26.49dBµV/m, RBW: 100kHz

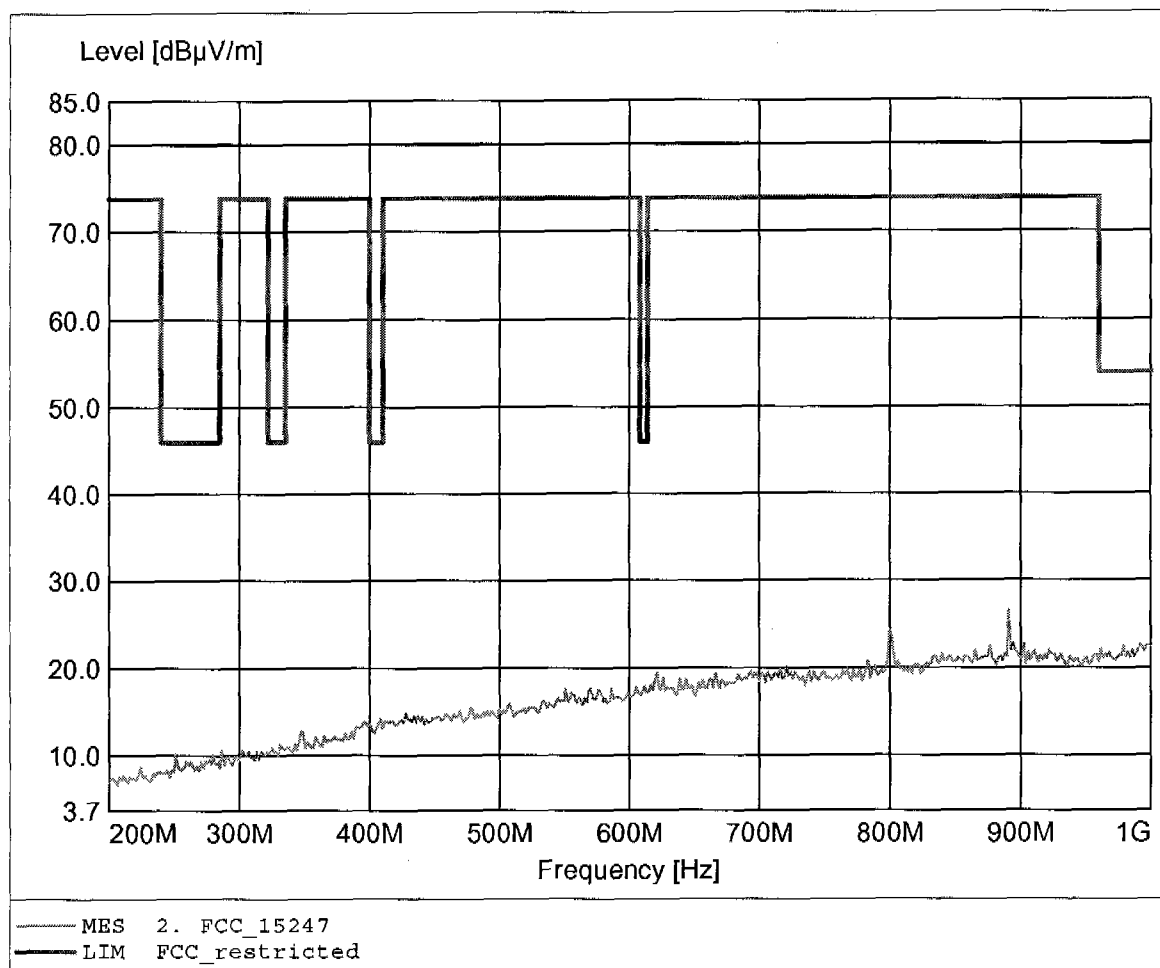

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2441 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 911.824MHz, Emax: 31.12dBµV/m, RBW: 100kHz

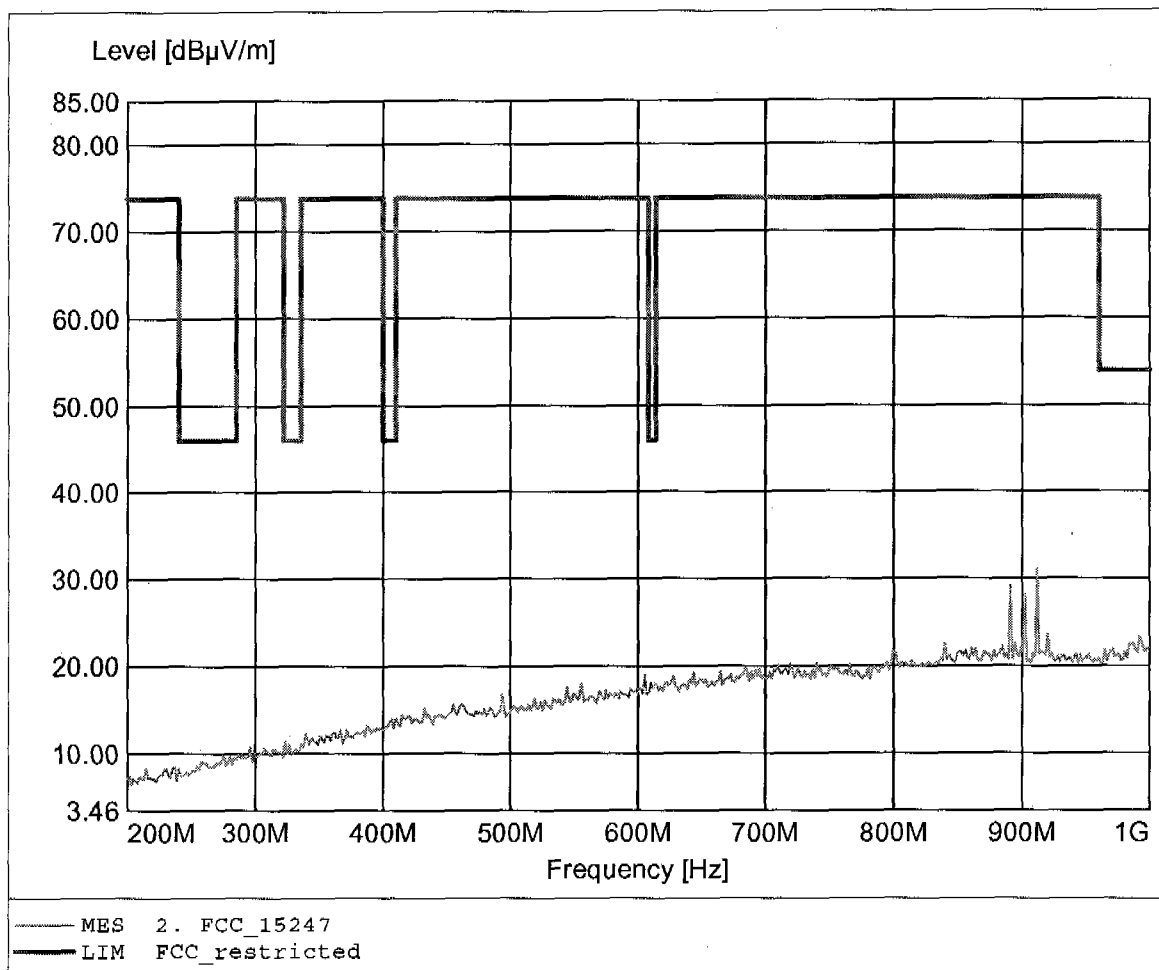

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2441 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.628GHz, Emax: 46.02dBuV/m, REW: 1MHz

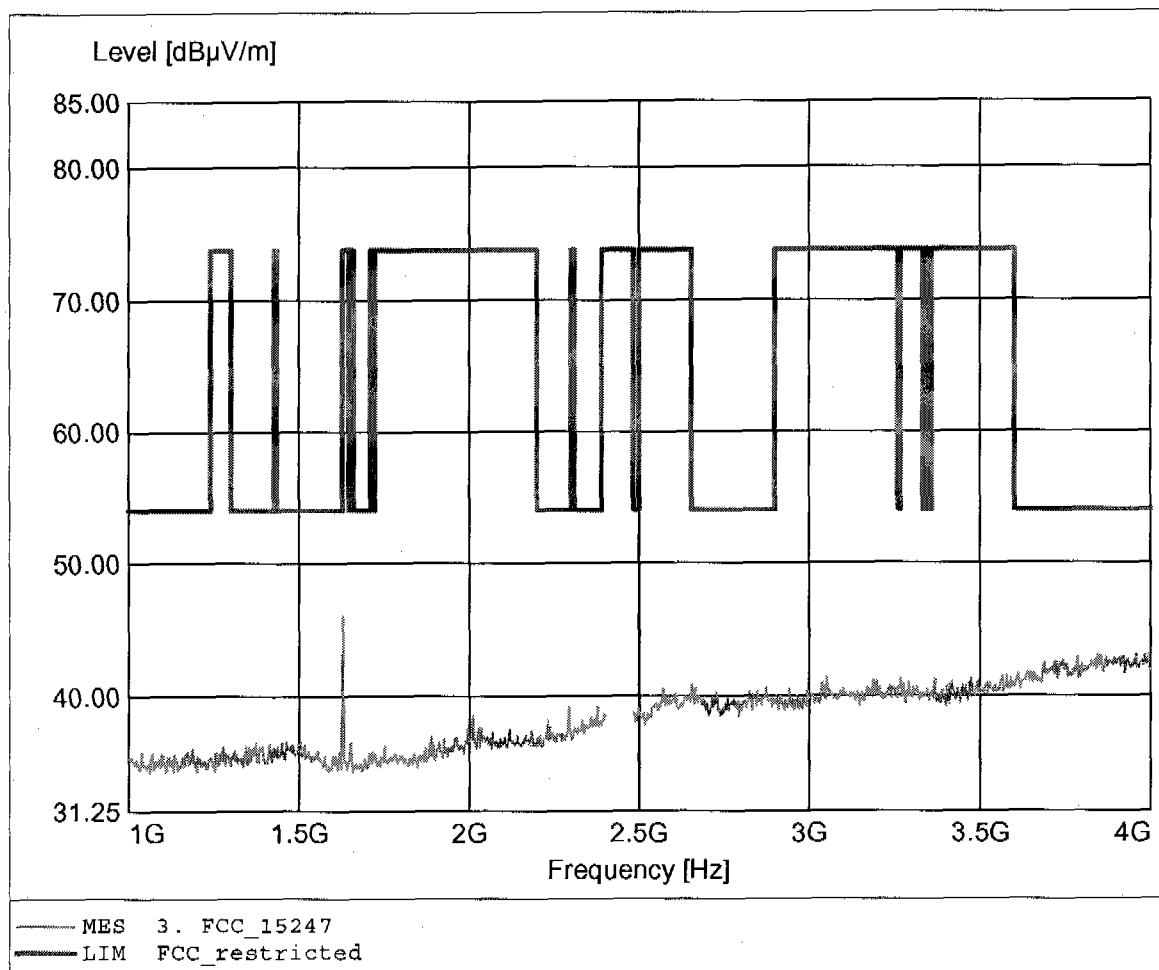

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2441 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.885GHz, Emax: 43.30dBμV/m, RBW: 1MHz

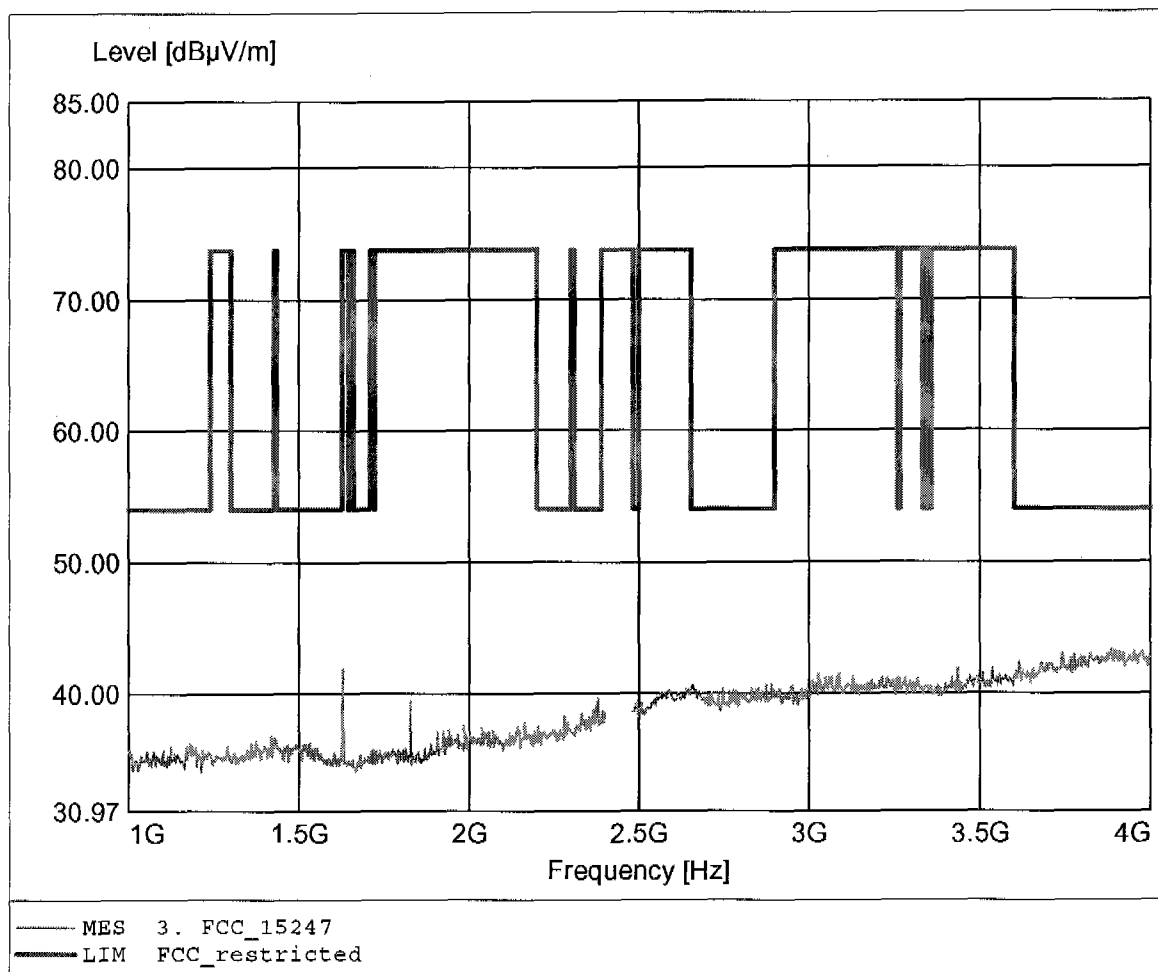

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2441 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 49.99dBμV/m, RBW: 1MHz

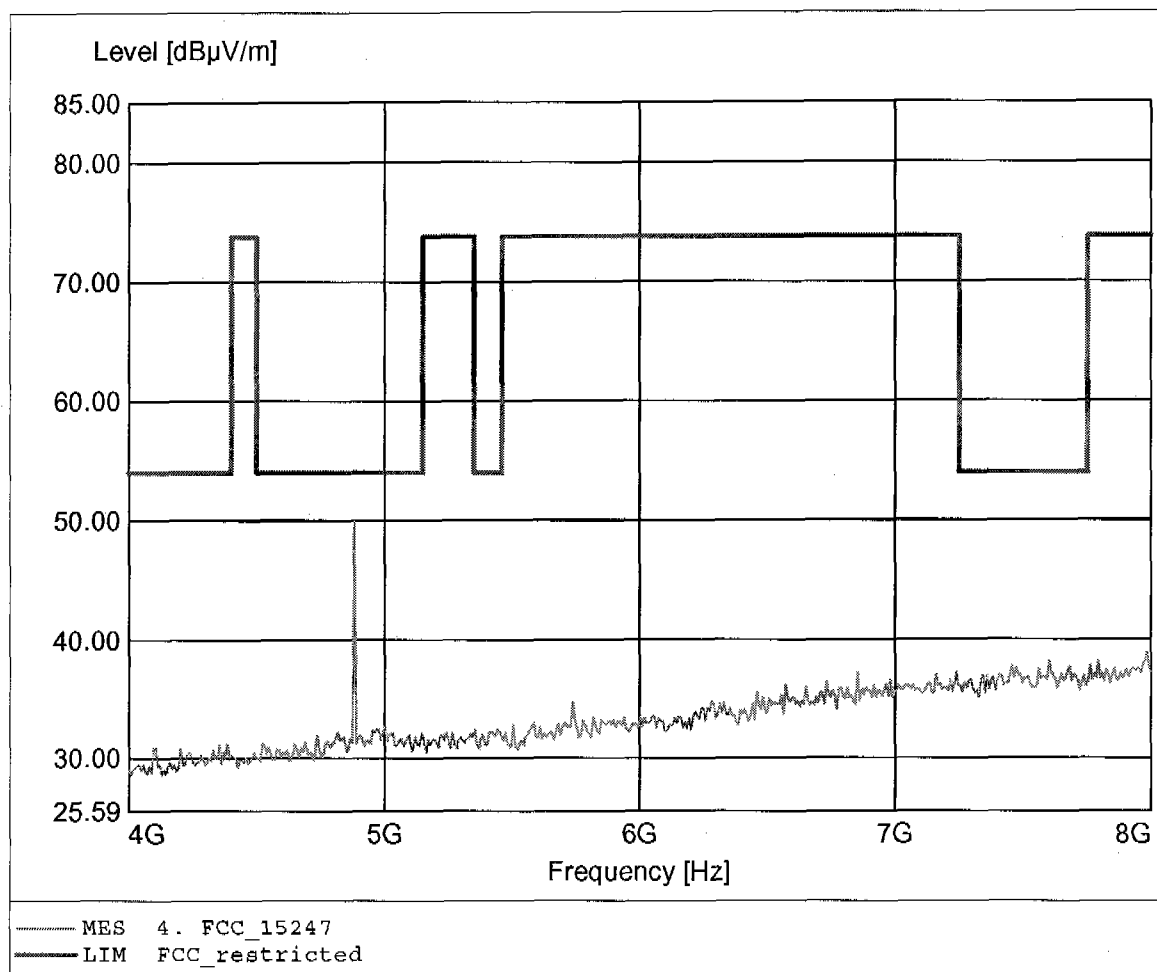

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2441 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 42.78dBμV/m, RBW: 1MHz

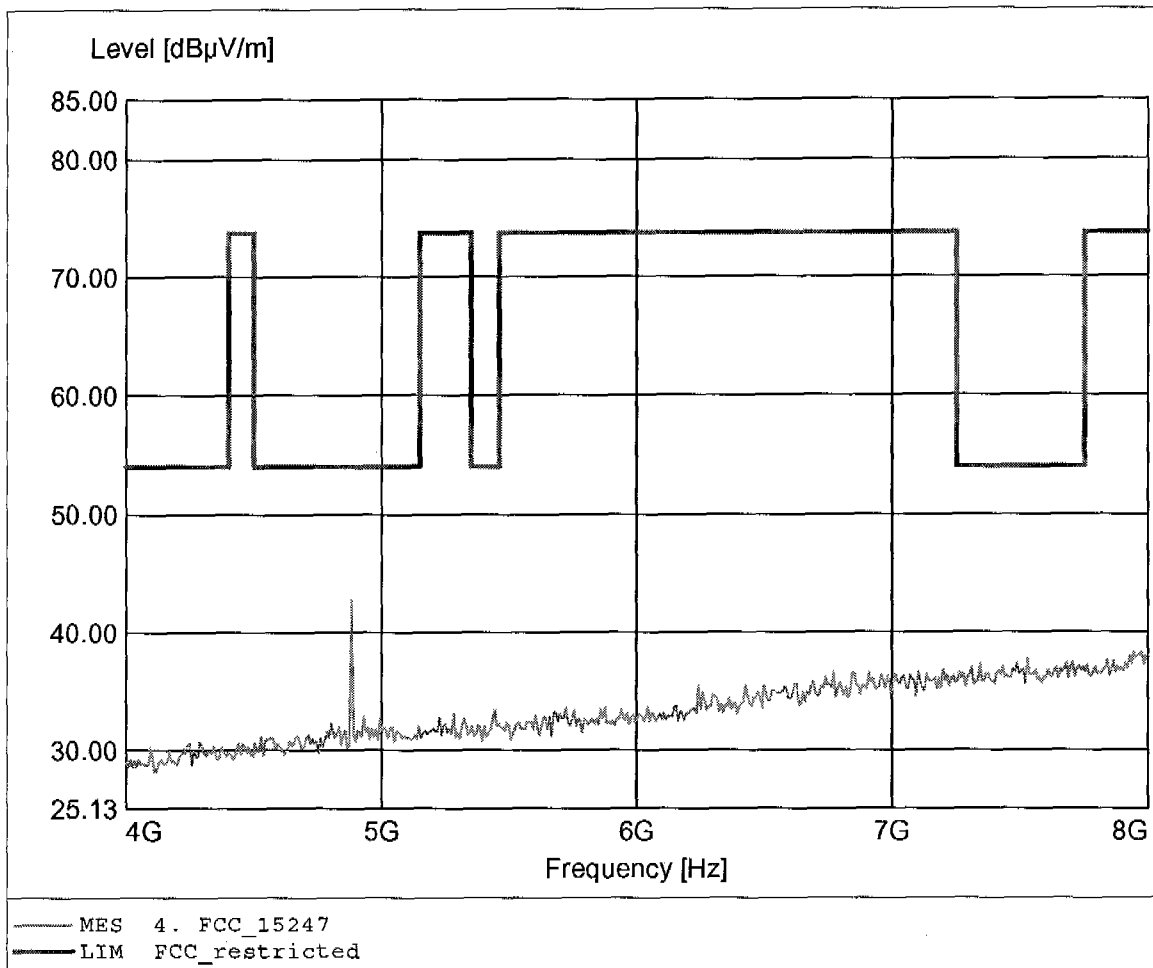

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2441 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 10.549GHz, Emax: 41.51dBuV/m, RBW: 1MHz

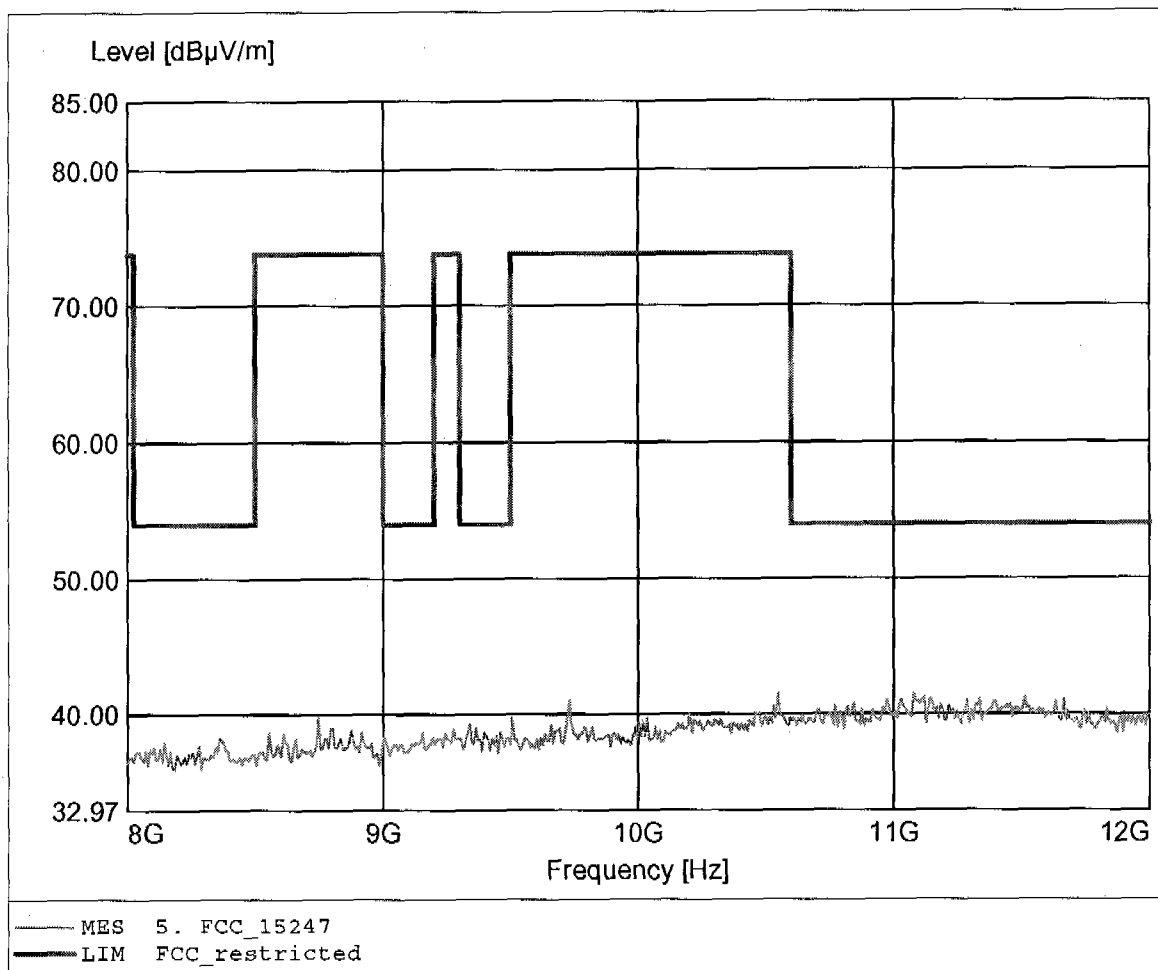

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2441 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.046GHz, Emax: 41.57dBuV/m, RBW: 1MHz

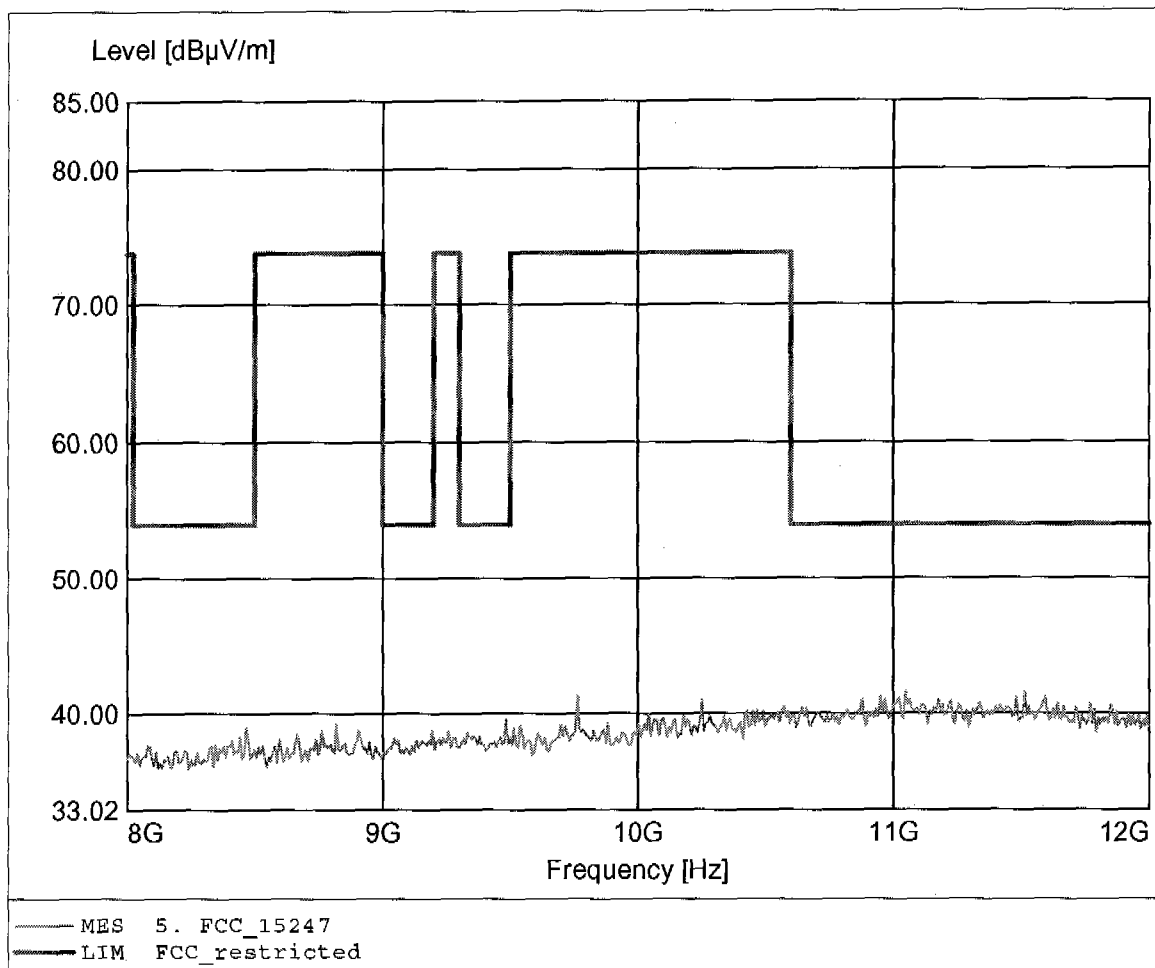

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2441 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.565GHz, Emax: 44.41dBμV/m, RBW: 1MHz

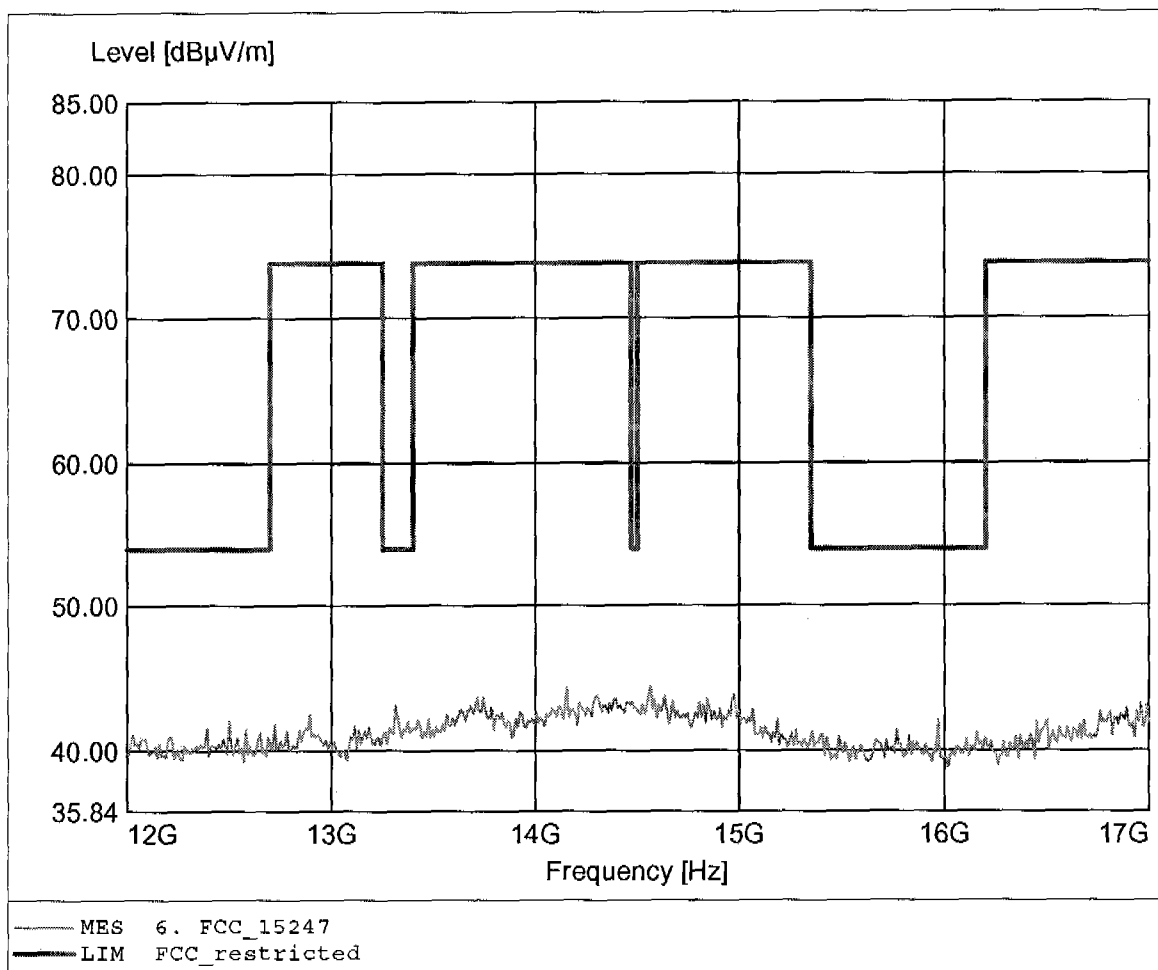

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2441 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.485GHz, Emax: 44.61dBµV/m, RBW: 1MHz

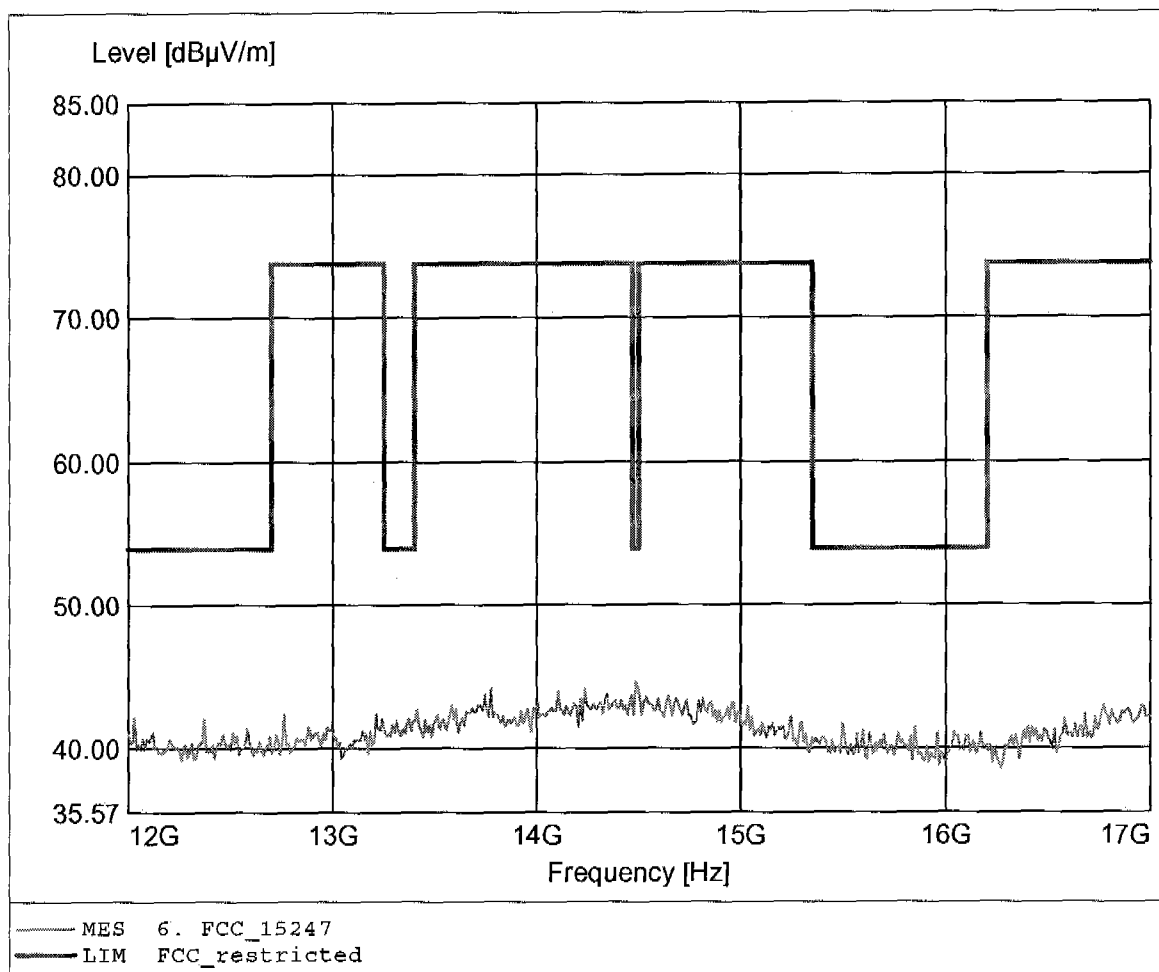

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2441 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.114GHz, Emax: 46.63dBμV/m, RBW: 1MHz

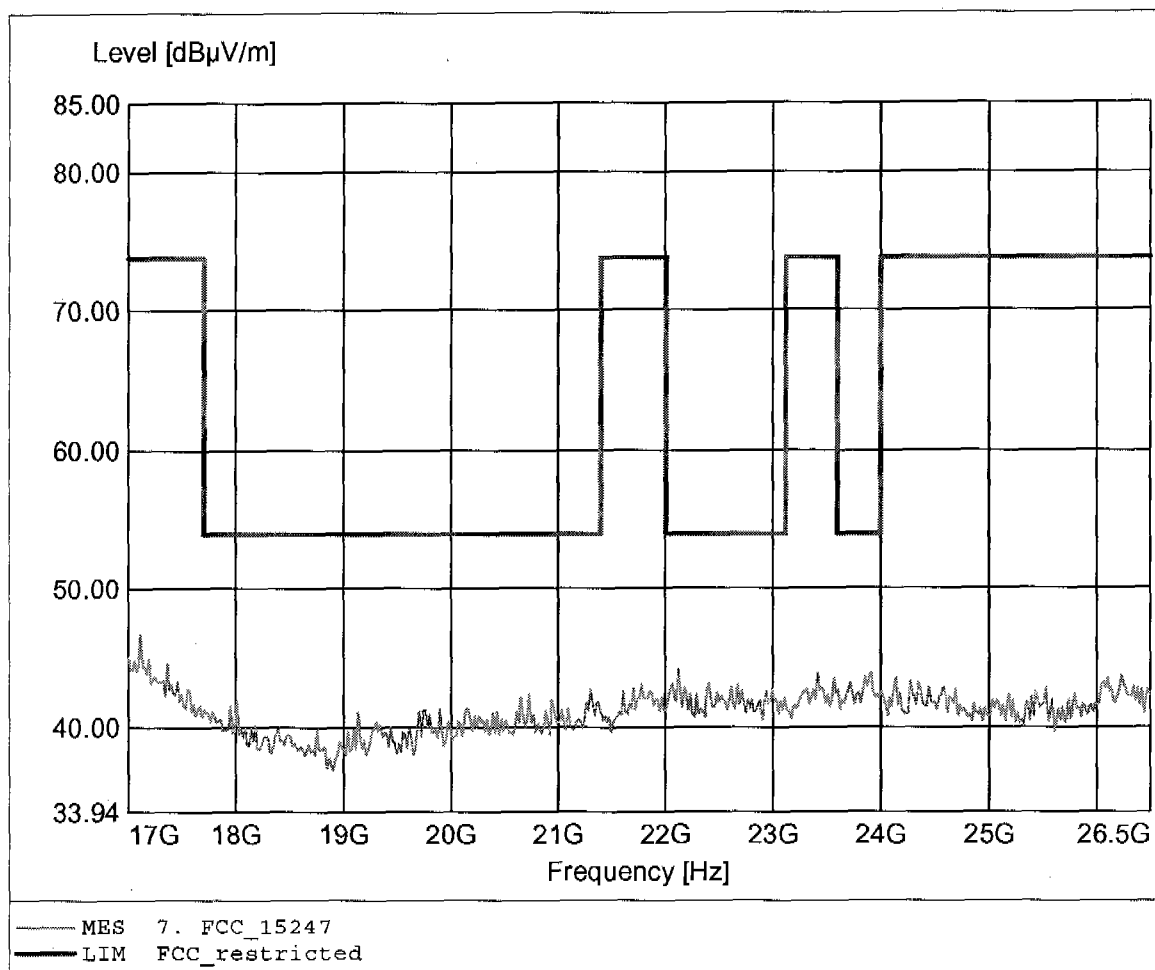

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2441 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 45.82dBµV/m, RBW: 1MHz

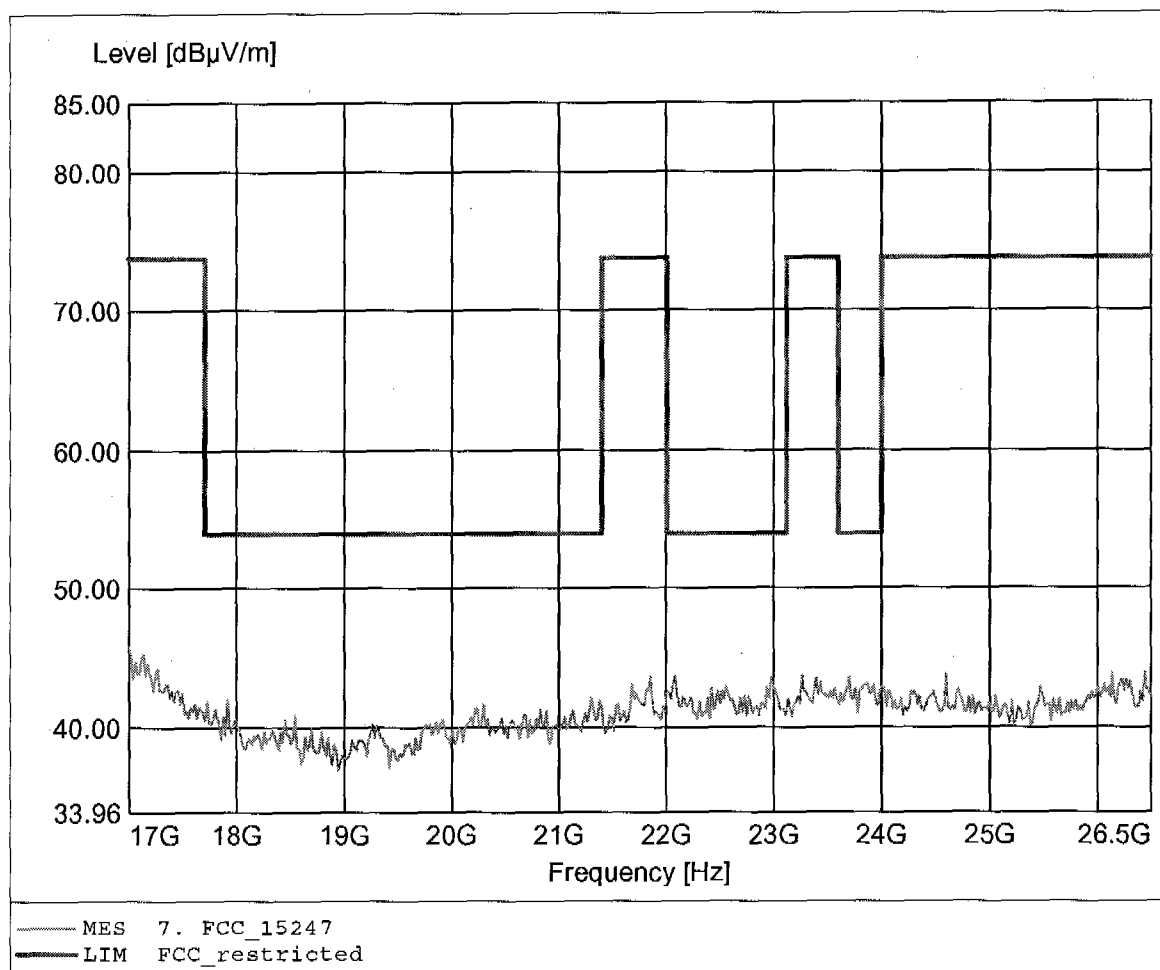

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2480 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 189.780MHz, Emax: 32.95dBµV/m, RBW: 100kHz

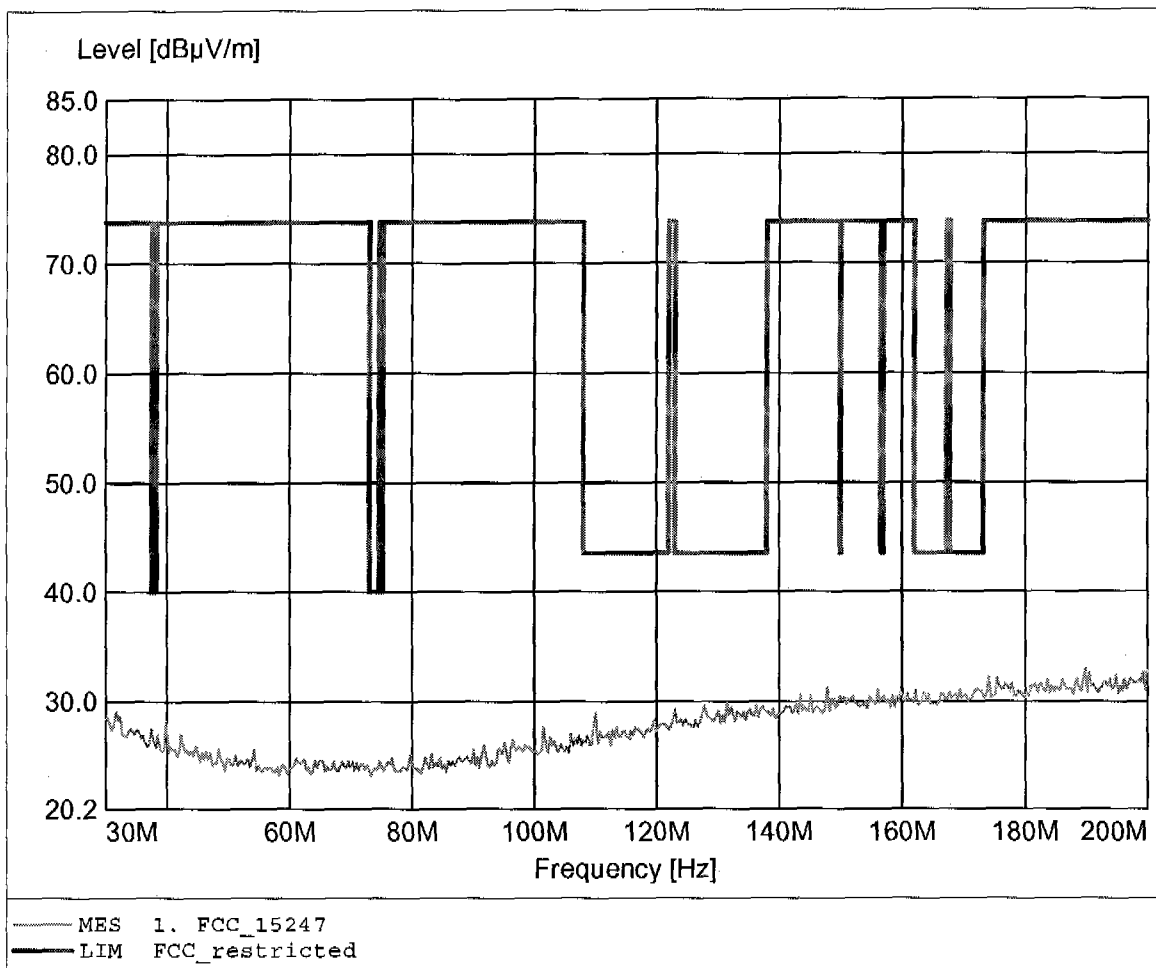

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2480 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 178.196MHz, Emax: 33.26dBµV/m, RBW: 100kHz

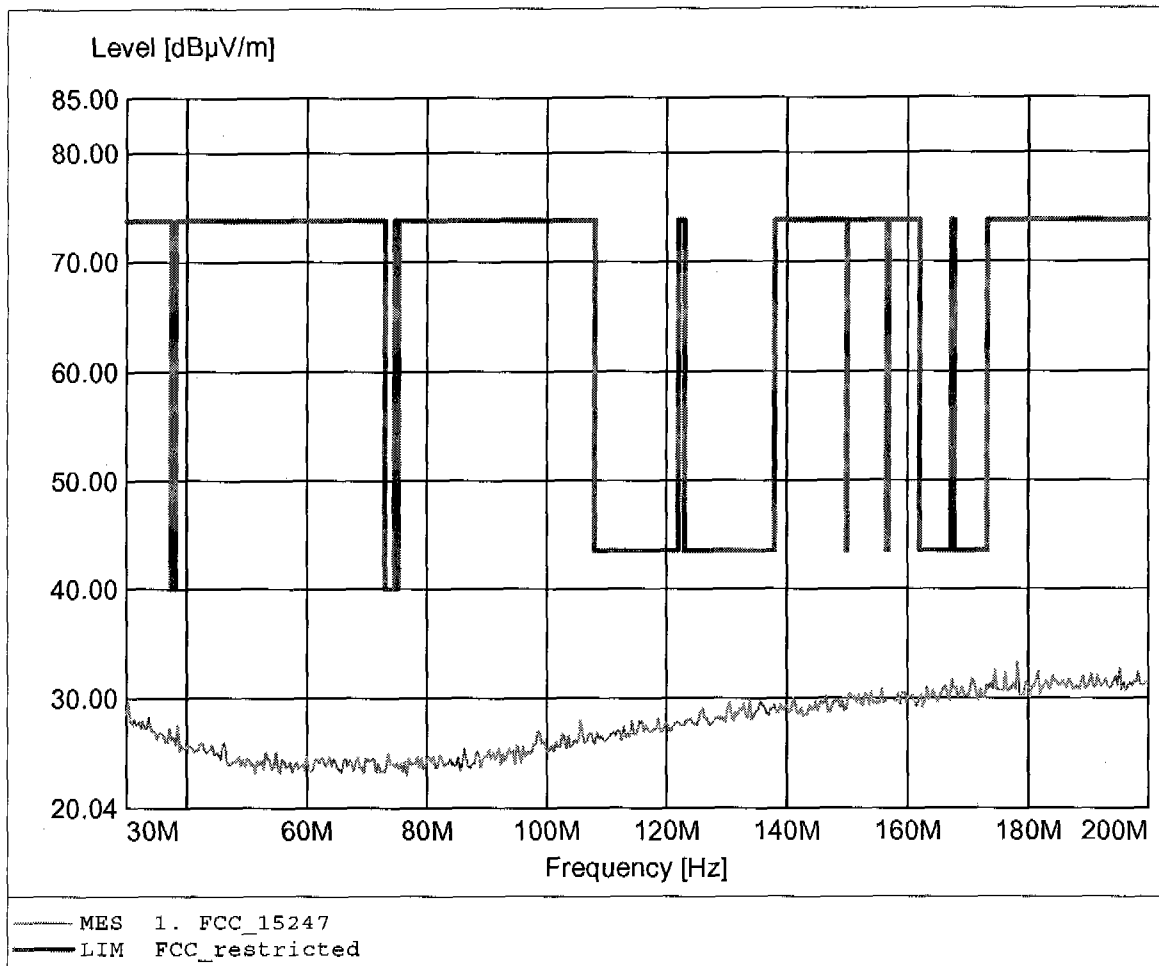

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C

Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2480 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 799.599MHz, Emax: 25.05dBµV/m, RBW: 100kHz

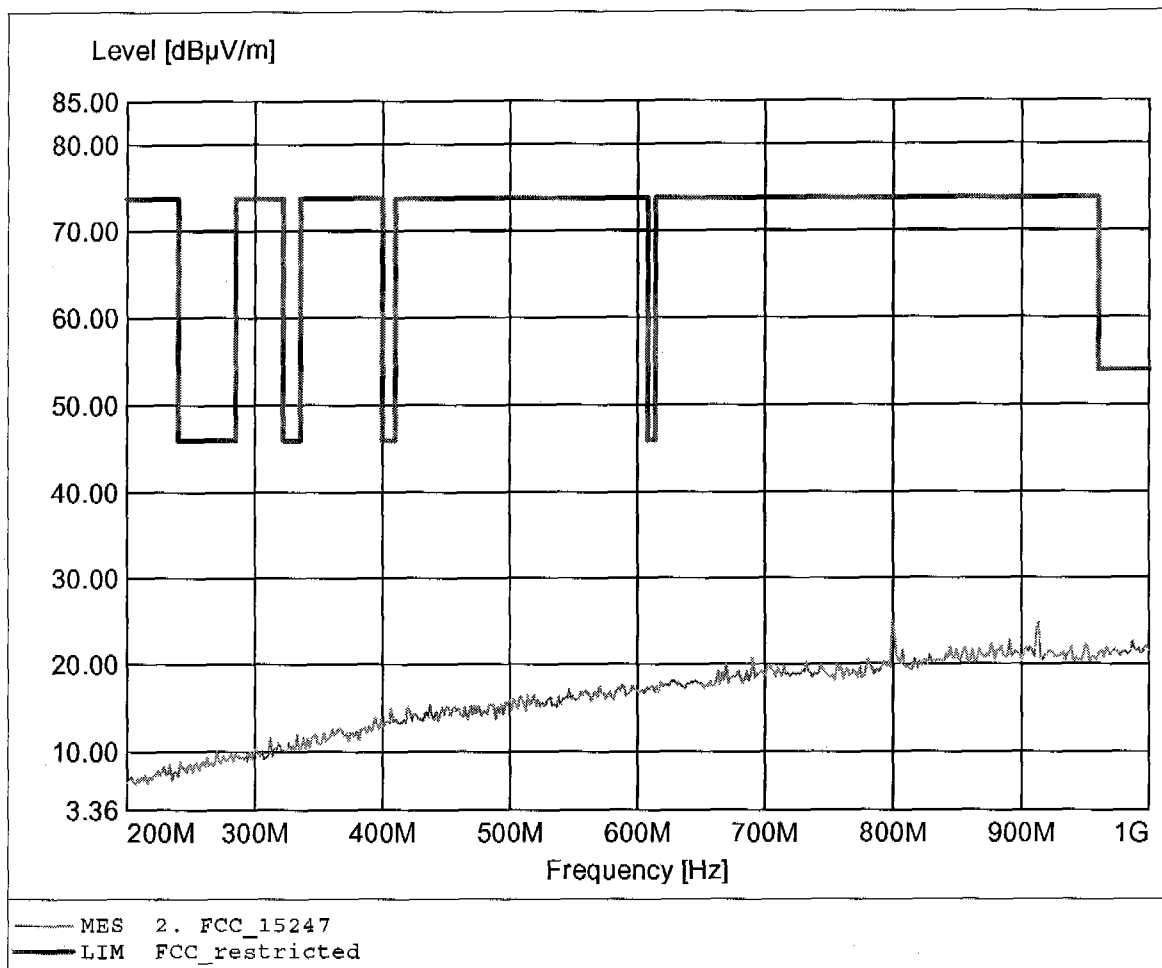


FCC RULES PART 15, SUBPART C

The graph displays two curves: a solid line for 'MES 2. FCC_15247' and a dashed line for 'LIM FCC_restricted'. The y-axis is labeled 'Level [dBμV/m]' and ranges from 3.48 to 85.00. The x-axis is labeled 'Frequency [Hz]' and ranges from 200M to 1G. The solid line shows a stepped profile with several sharp drops and rises, while the dashed line shows a more gradual, noisy increase in level with frequency.

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2480 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 48.01dBuV/m, RBW: 1MHz

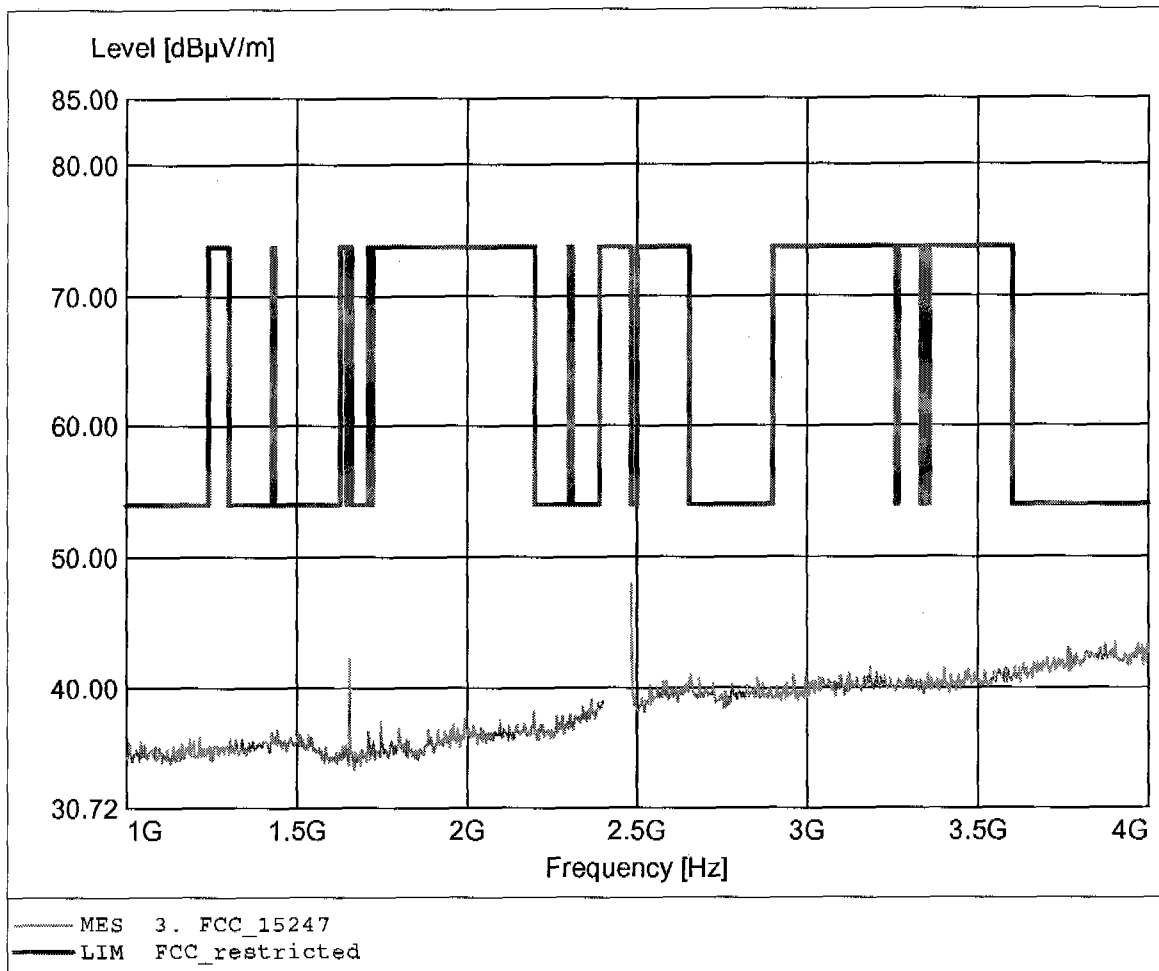

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2480 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 52.50dBuV/m, RBW: 1MHz

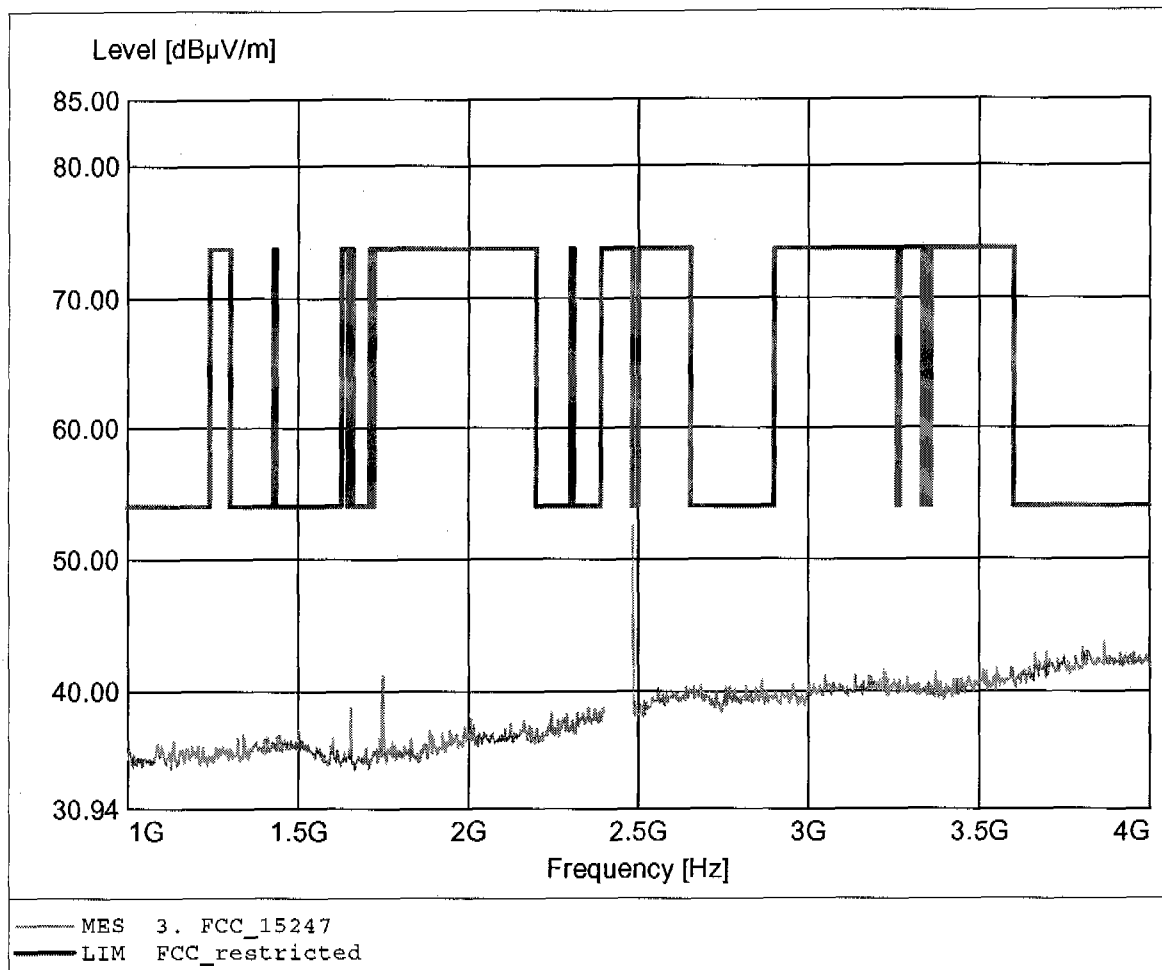

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2480 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 45.98dBμV/m, RBW: 1MHz

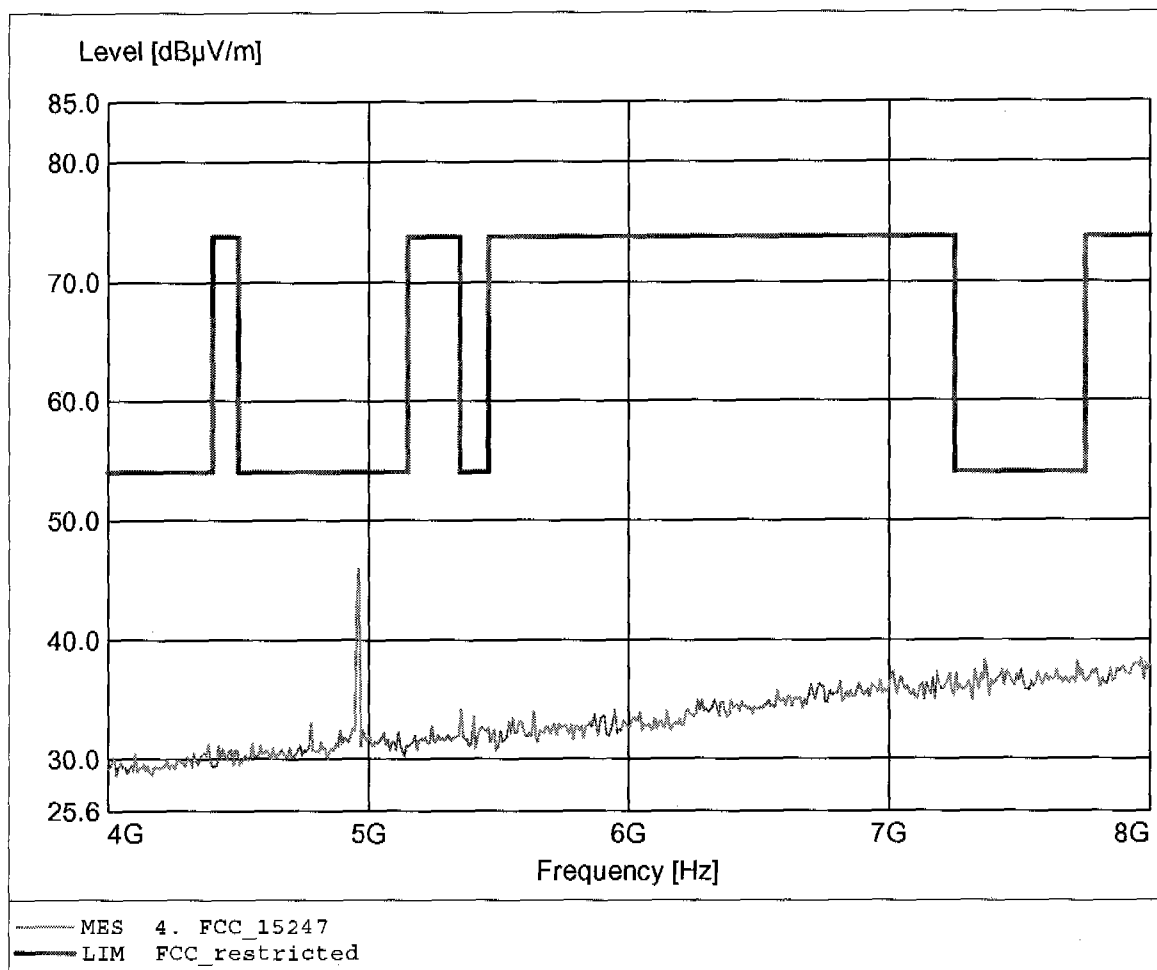

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2480 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.954GHz, Emax: 39.37dBuV/m, RBW: 1MHz

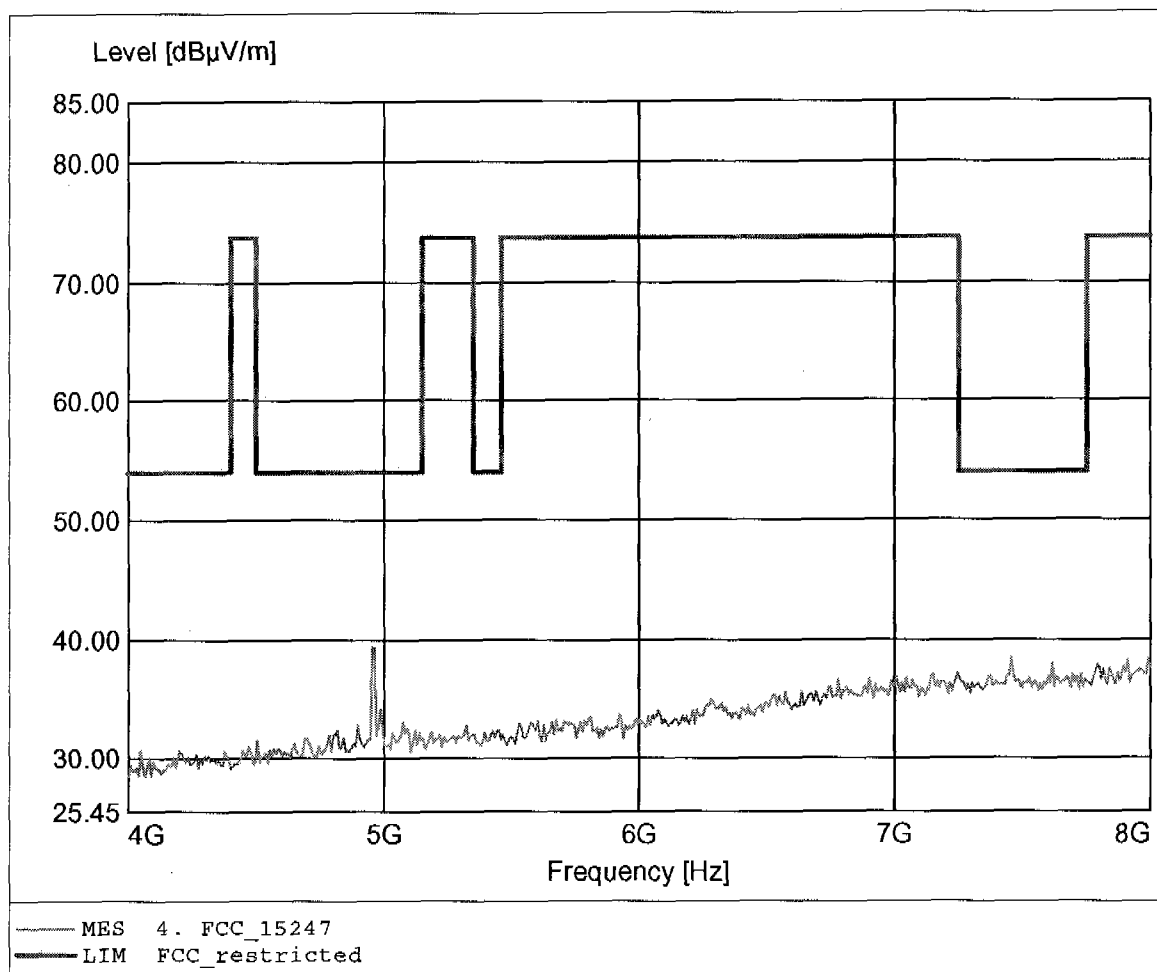

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2480 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.110GHz, Emax: 41.75dBµV/m, RBW: 1MHz

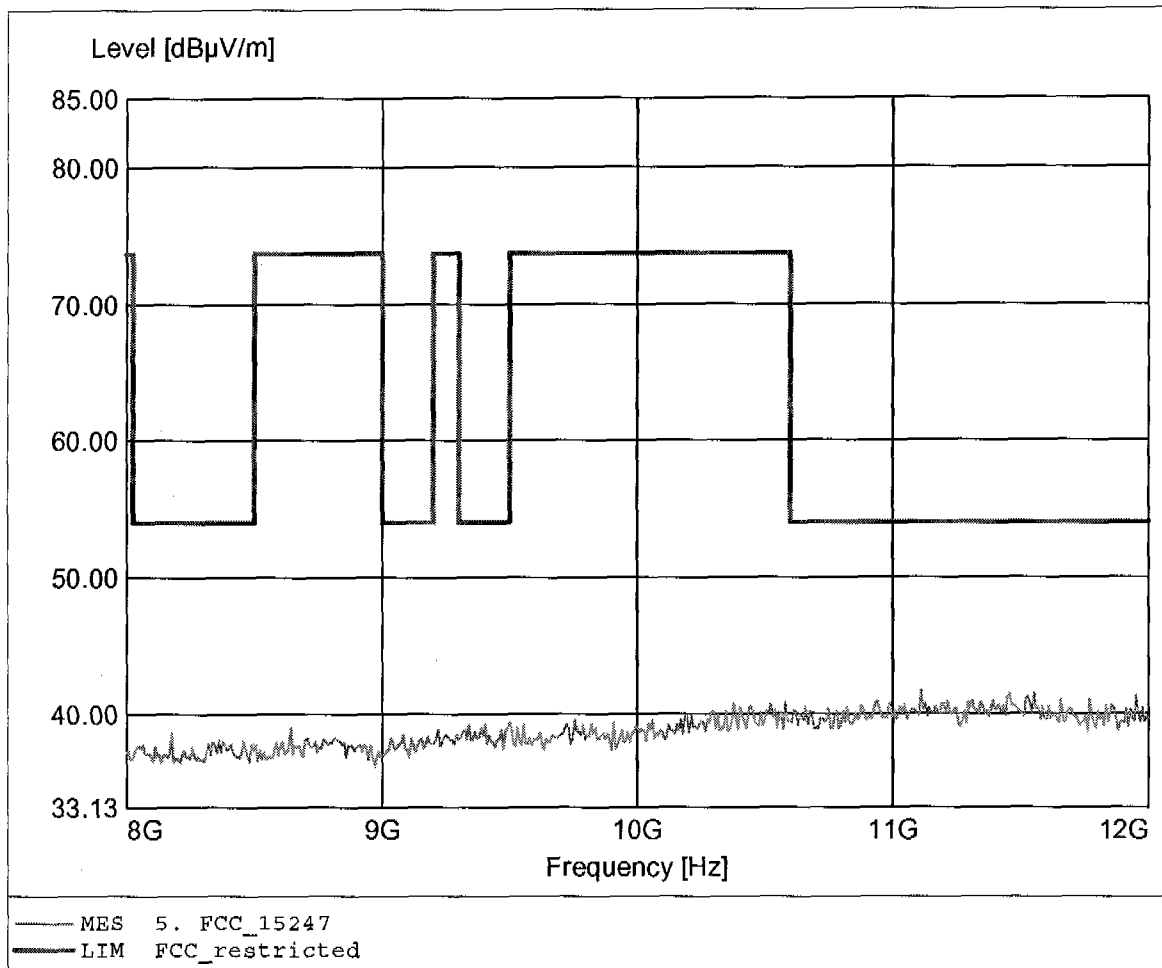

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2480 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.447GHz, Emax: 43.02dBuV/m, RBW: 1MHz

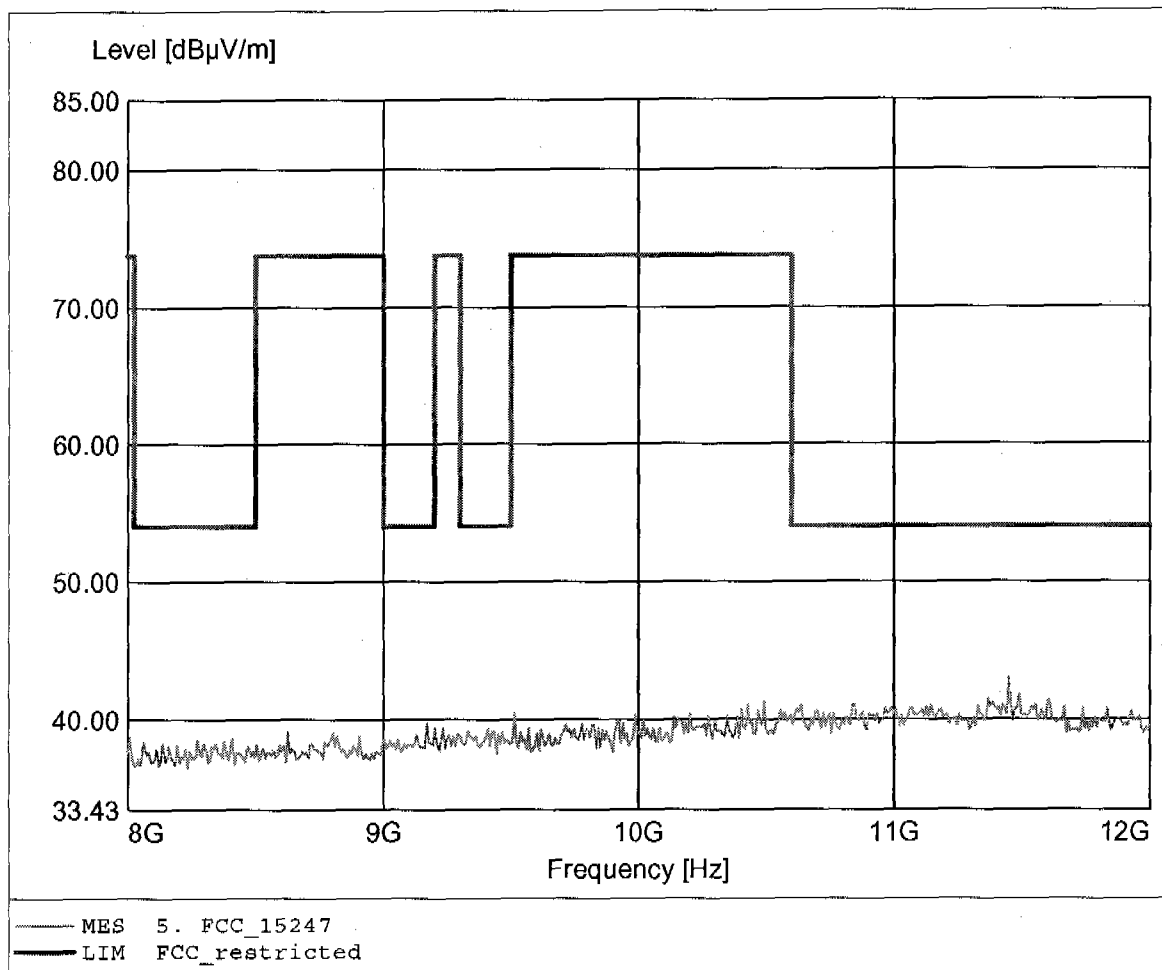

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2480 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.966GHz, Emax: 44.69dBµV/m, RBW: 1MHz

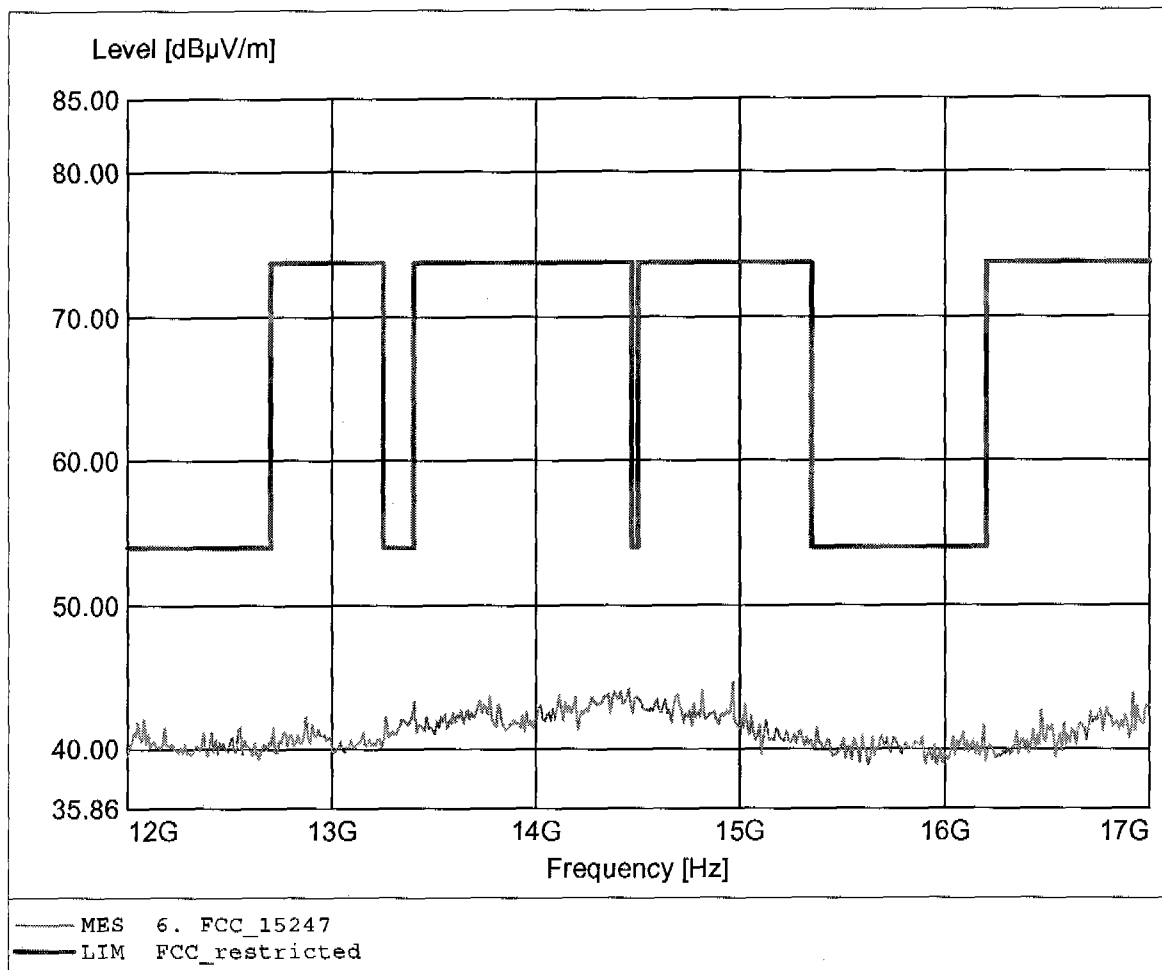

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2480 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.615GHz, Emax: 45.08dBµV/m, RBW: 1MHz

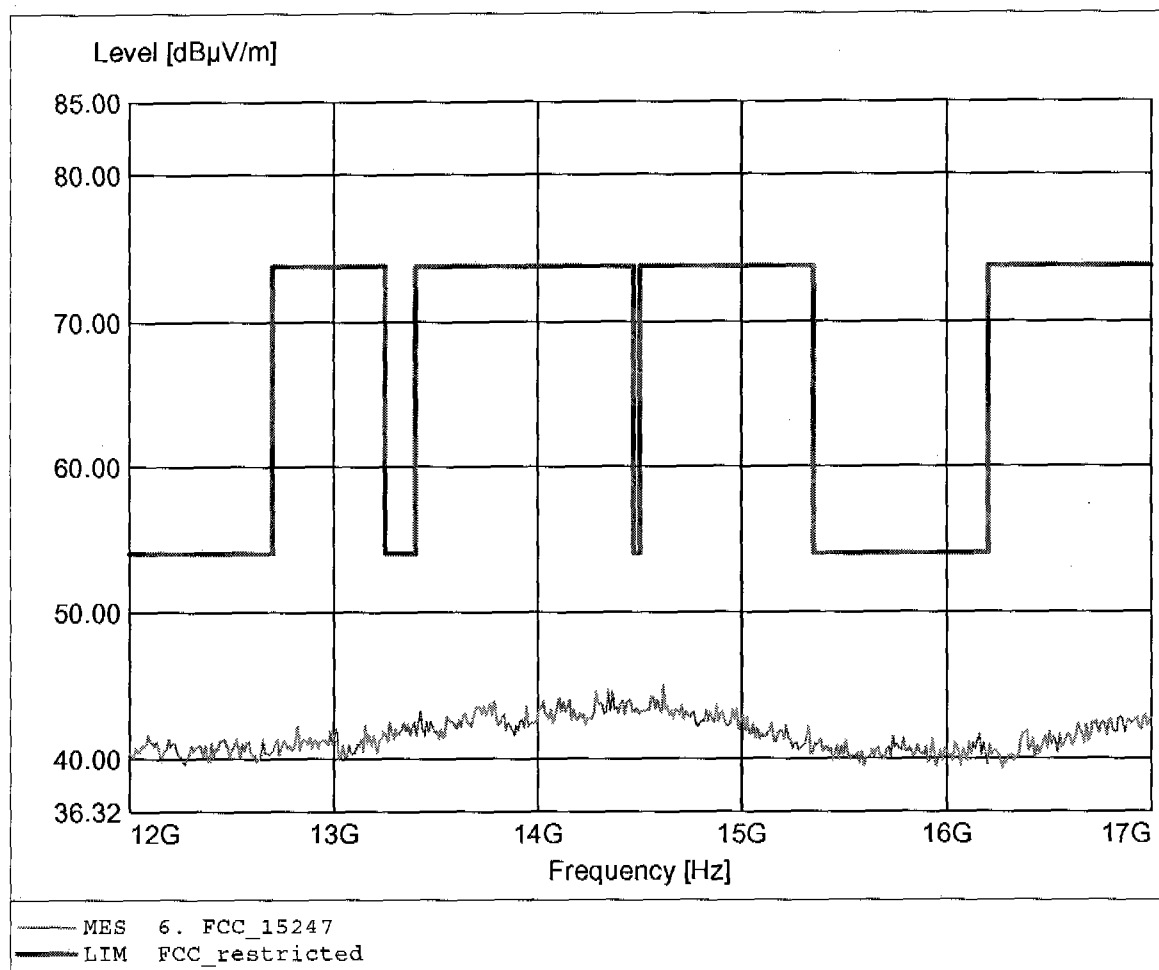

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2480 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.057GHz, Emax: 45.17dBµV/m, RBW: 1MHz

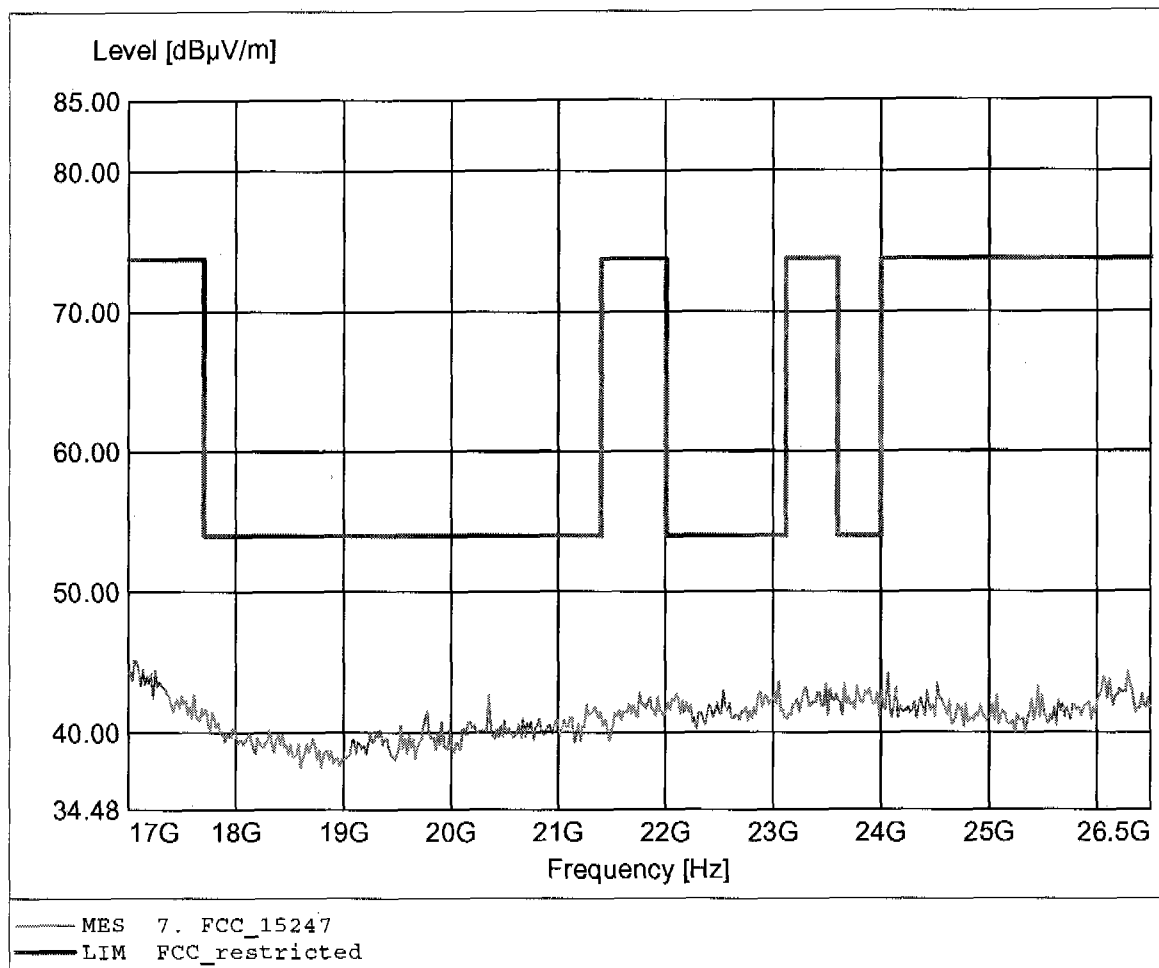

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C

Approval Holder: GN Mobile
EUT: Jabra Headset JX10 / 2480 MHz
Model: Jabra JX10
Test Site / Operator: ETS / Mr. Schlaps
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 45.82dBuV/m, RBW: 1MHz

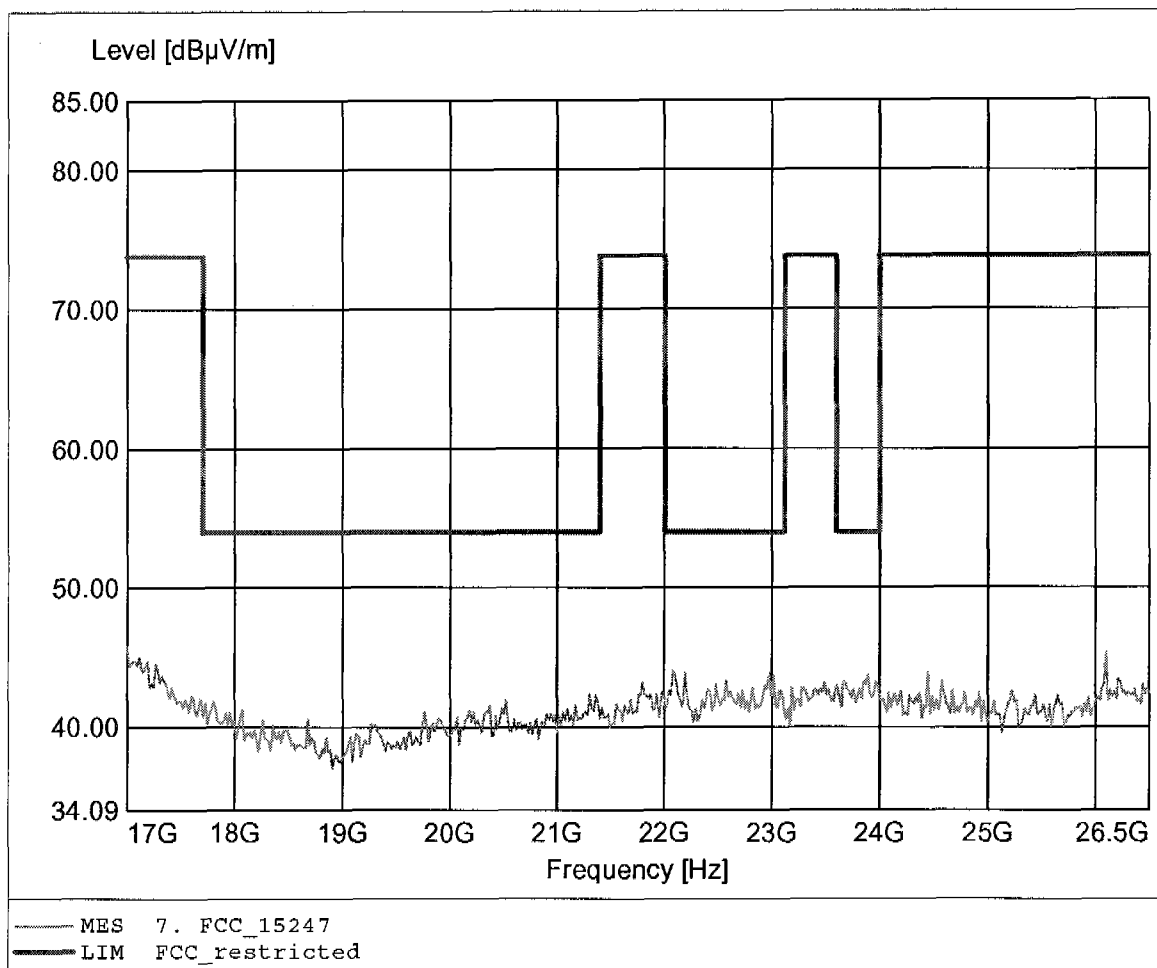

Appendix D


Spurious Emissions conducted - Transmitter operating

Appendix E

Carrier Frequency Separation



Delta 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl -0.02 dB VBW 100 kHz
10 dBm 1.00961924 MHz SWT 5 ms Unit dBm

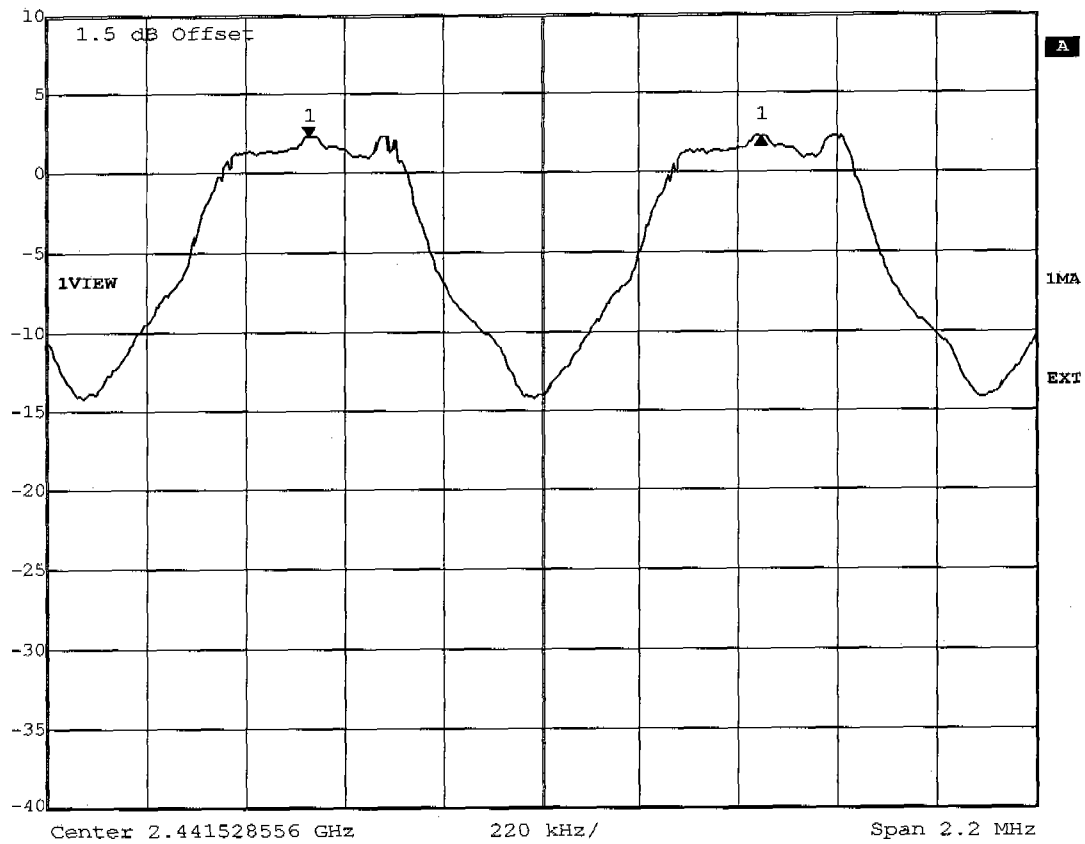

Title: Carrier Frequency Separation
Comment A: Jabra JX10
Date: 22.APR.2005 14:14:26


Appendix F

Number of Hopping Frequencies



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

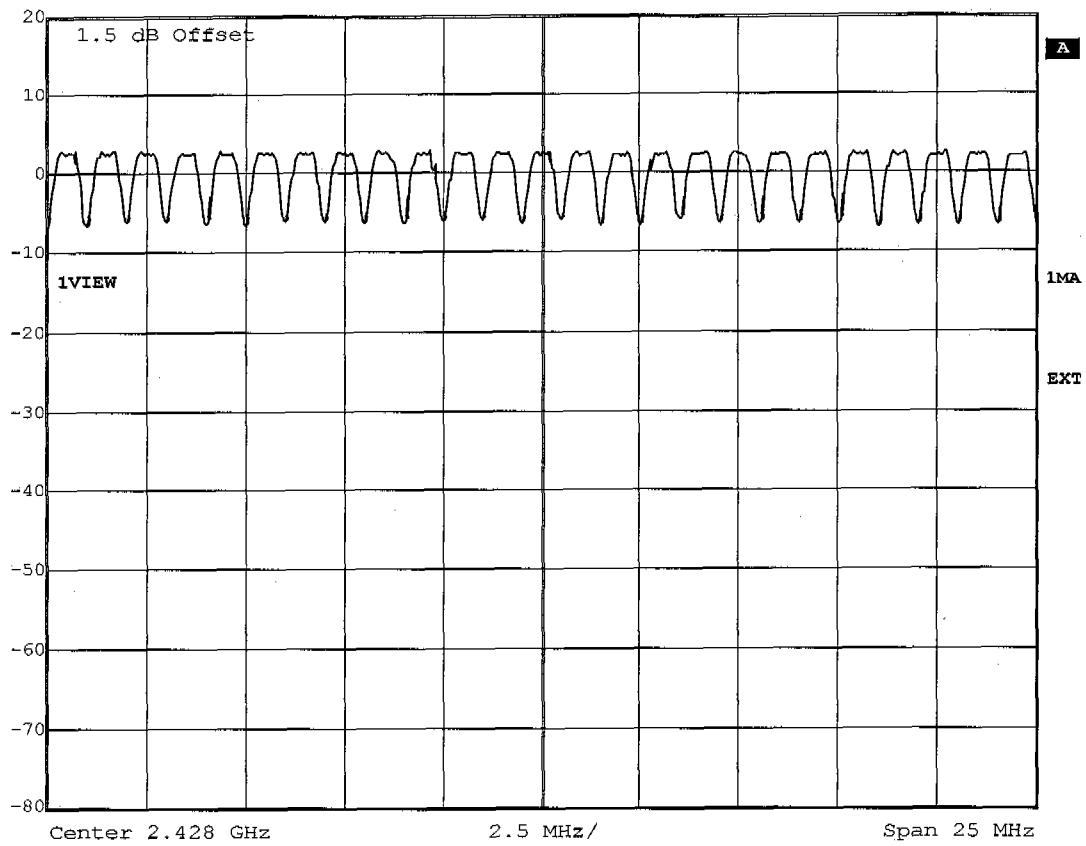


Title: Number of Hopping Frequencies Ch.: 14-38
Comment A: Jabra JX10
Date: 22.APR.2005 14:31:46



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

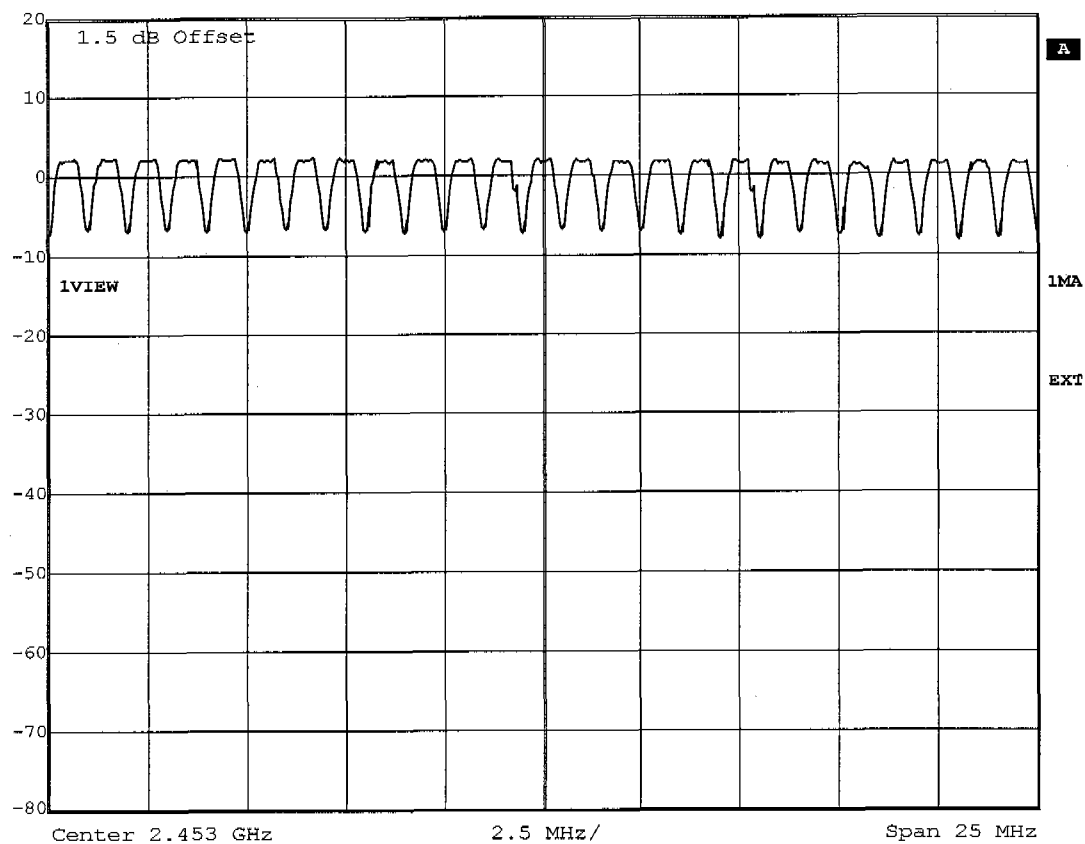


Title: Number of Hopping Frequencies Ch.: 39-63
Comment A: Jabra JX10
Date: 22.APR.2005 14:33:18



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

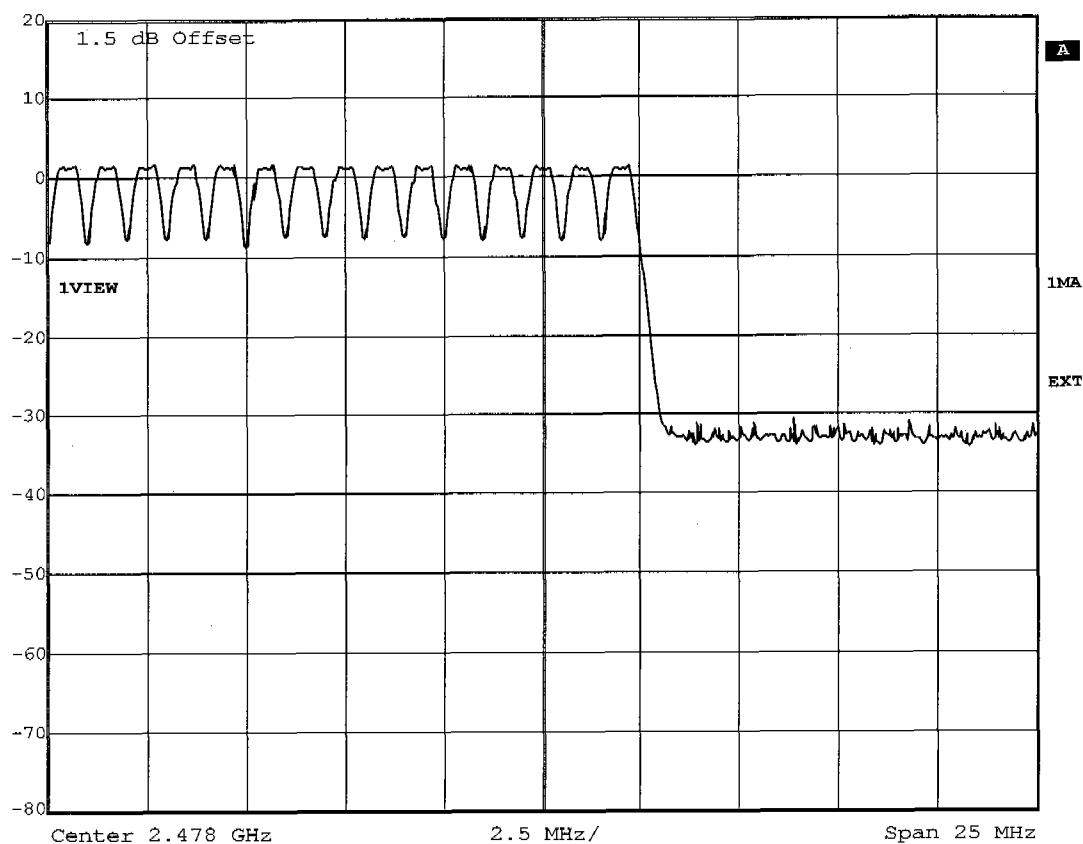


Title: Number of Hopping Frequencies Ch.: 64-78
Comment A: Jabra JX10
Date: 22.APR.2005 14:34:43



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

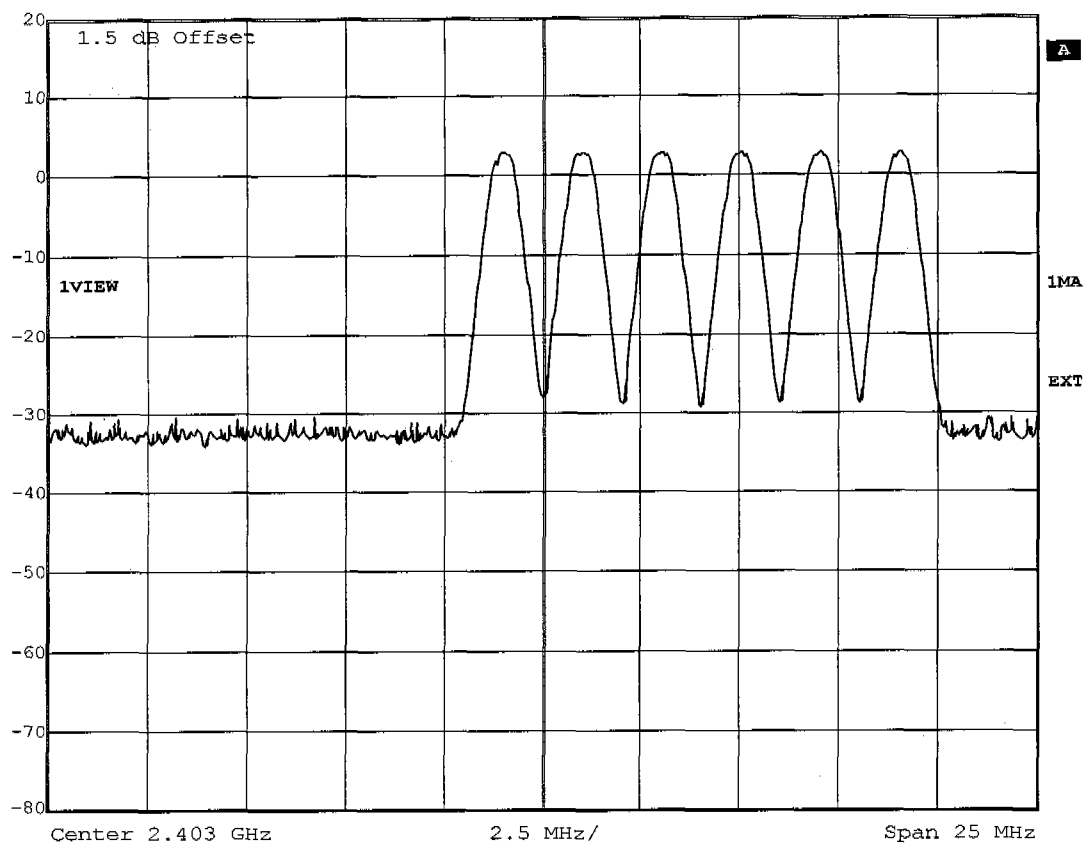


Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: Jabra JX10
Date: 22.APR.2005 15:23:10



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

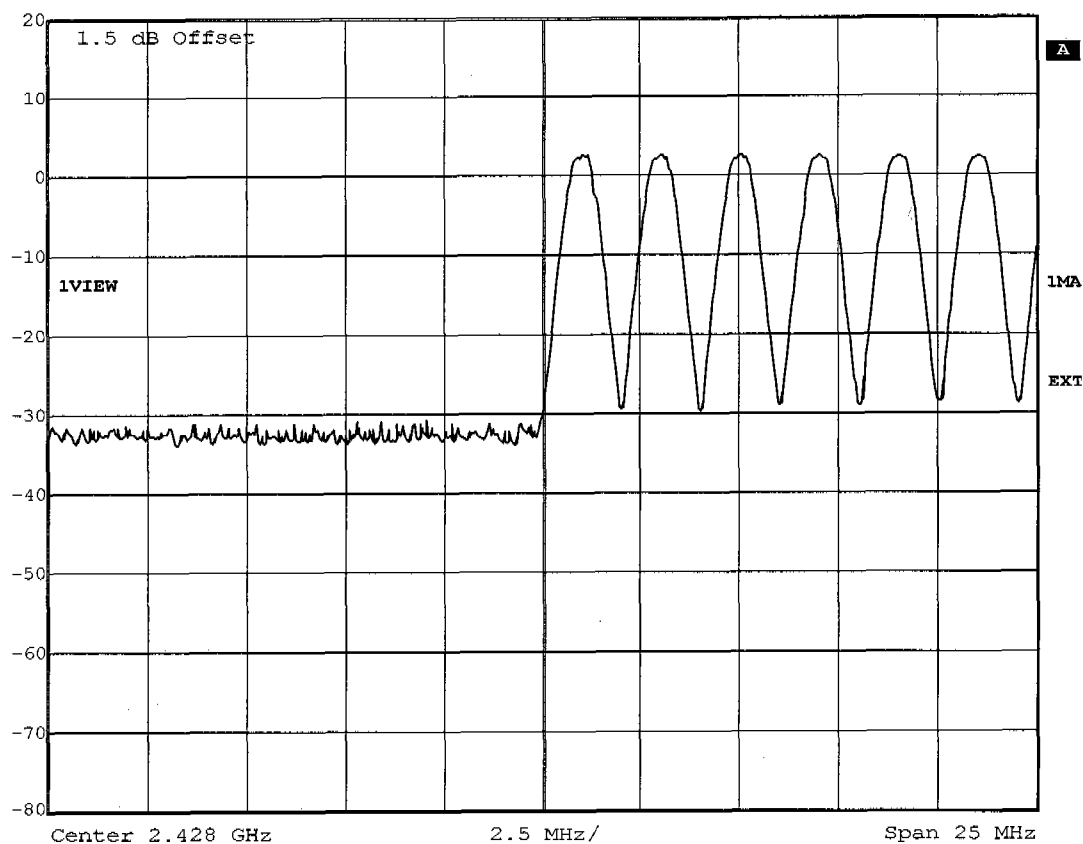


Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: Jabra JX10
Date: 22.APR.2005 15:25:21



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

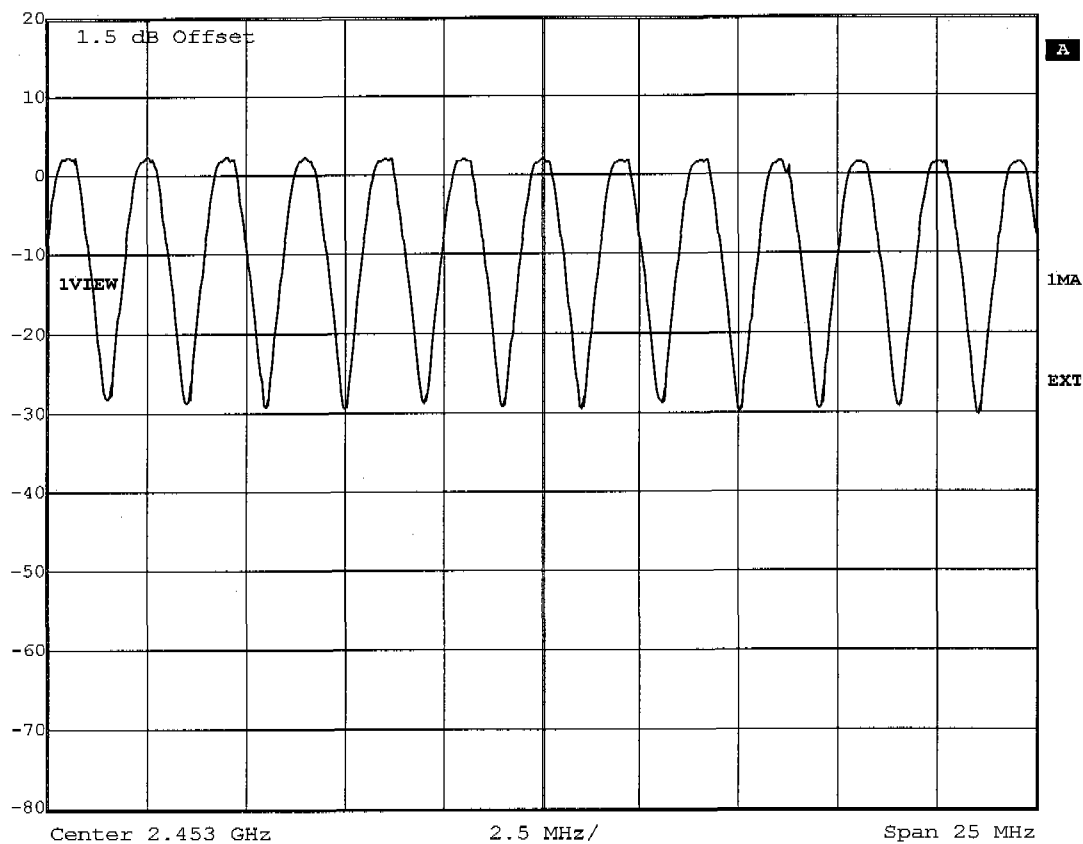


Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: Jabra JX10
Date: 22.APR.2005 15:28:12



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

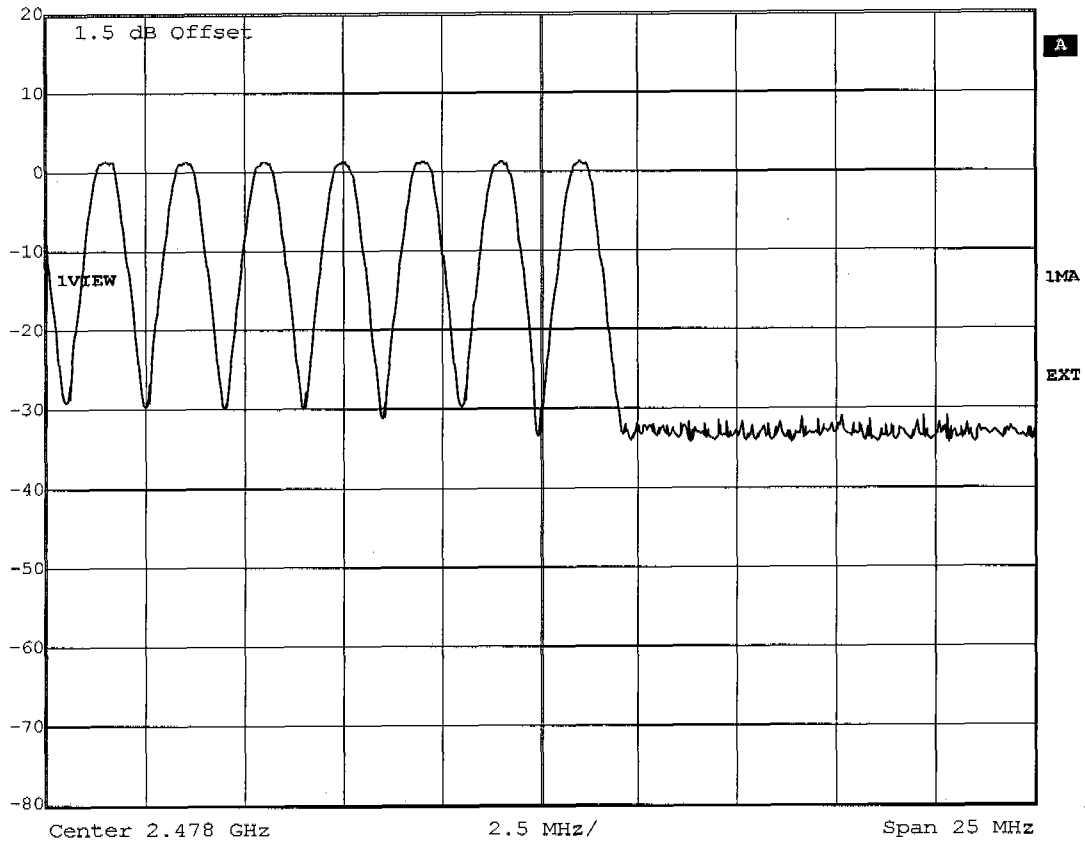


Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: Jabra JX10
Date: 22.APR.2005 15:29:55

Appendix G

Time of Occupancy (Dwell Time)




Delta 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl -0.14 dB VBW 1 MHz
10 dBm 2.912689 ms SWT 5 ms Unit dBm

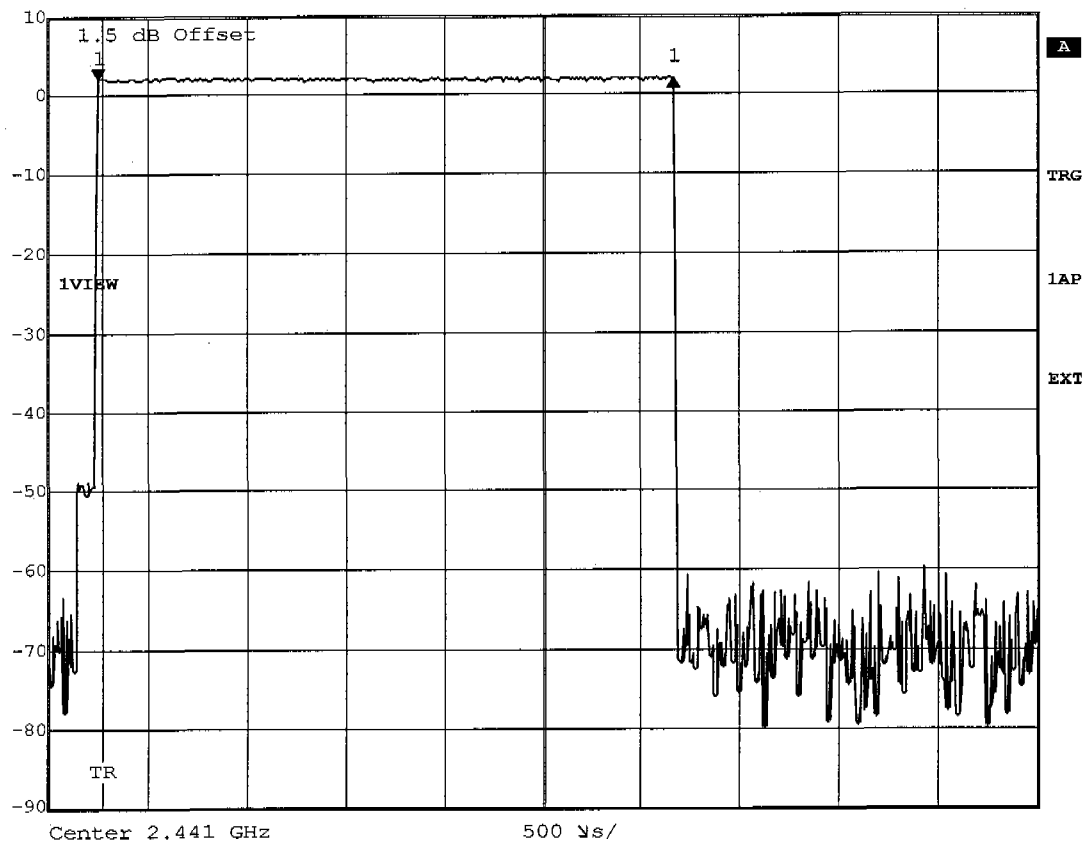

Title: Time of occupancy (Hopping DH5) 64 events * 2.913ms=186.43ms
Comment A: Jabra JX10
Date: 22.APR.2005 15:20:42



Delta 1 [T1] RBW 1 MHz RF Att 30 dB
Ref Lvl -0.22 dB VBW 1 MHz
10 dBm 119.311824 μ s SWT 300 μ s Unit dBm

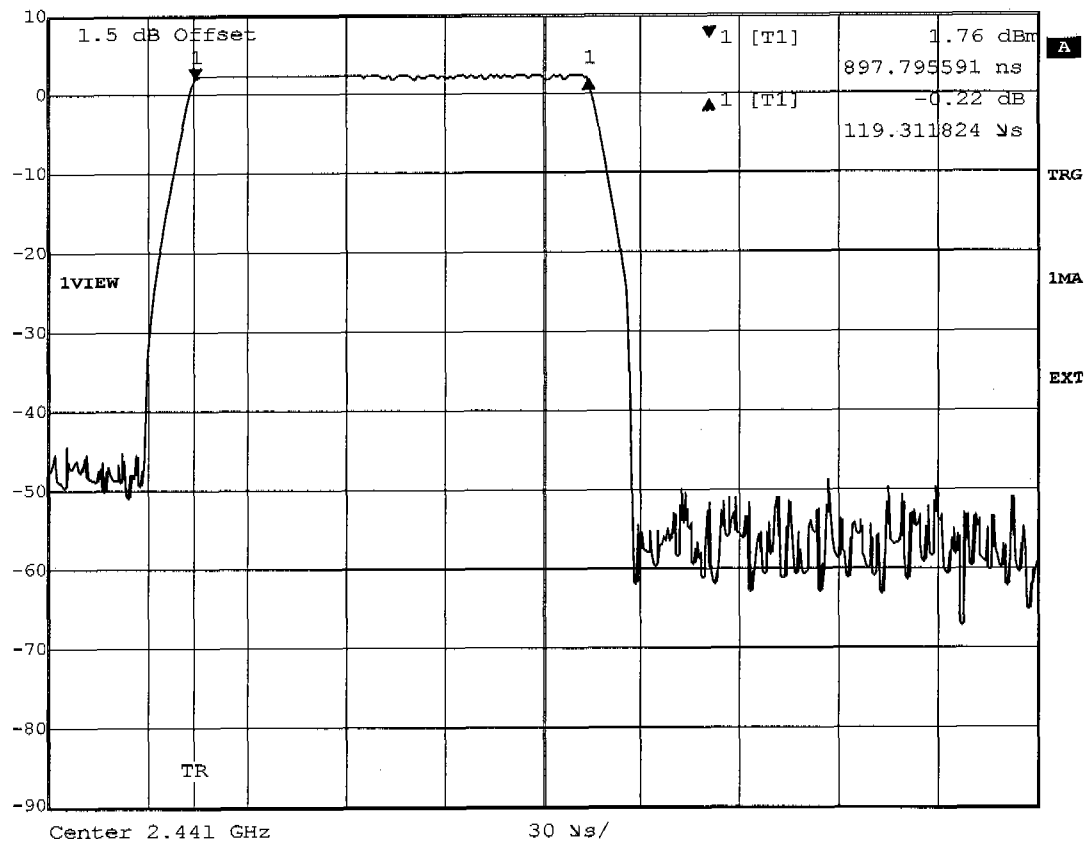


Title: Time of occupancy (Inquiry mode) 388 events * 0.119ms=46.2ms
Comment A: Jabra JX10
Date: 22.APR.2005 15:33:38

Appendix H

20dB Bandwidth




Delta 1 [T1] RBW 10 kHz RF Att 30 dB
Ref Lvl -0.16 dB VBW 10 kHz
10 dBm 877.35470942 kHz SWT 56 ms Unit dBm

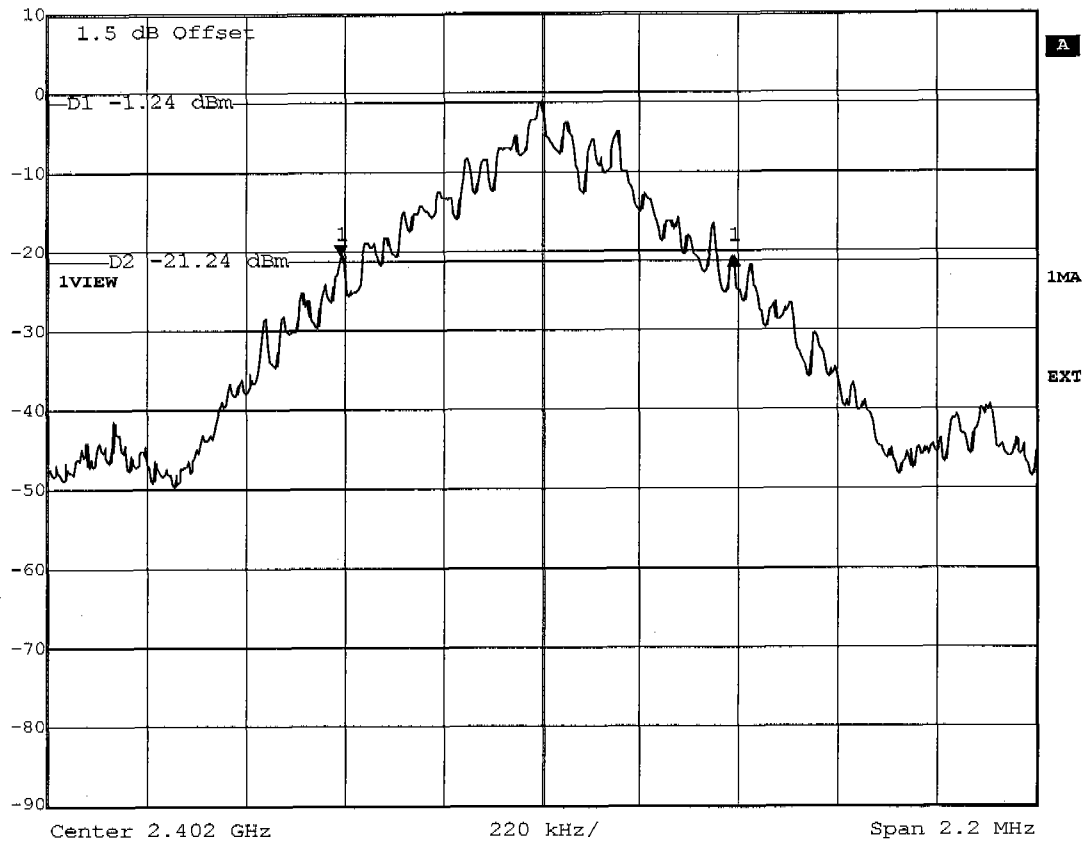

Title: -20dB Bandwidth Ch.: 0
Comment A: Jabra JX10
Date: 22.APR.2005 12:44:21




Delta 1 [T1] RBW 10 kHz RF Att 30 dB
Ref Lvl 0.02 dB VBW 10 kHz
10 dBm 917.03406814 kHz SWT 56 ms Unit dBm

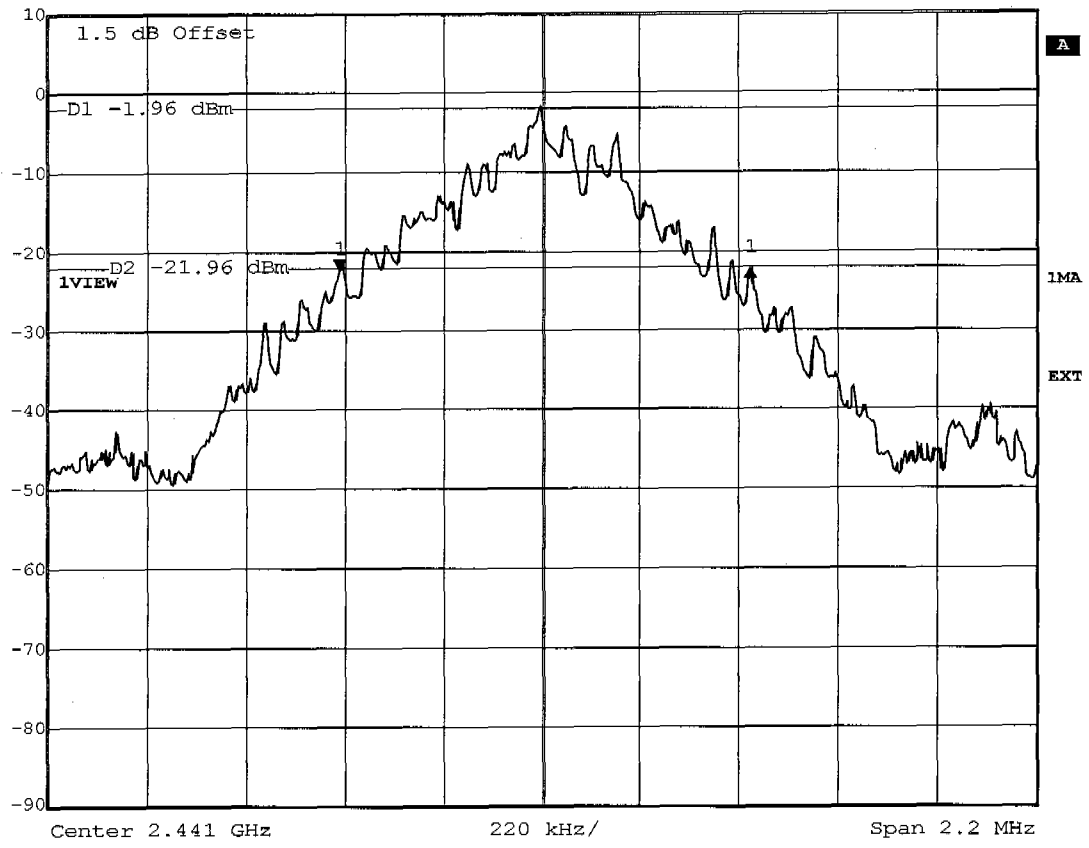

Title: -20dB Bandwidth Ch.: 39
Comment A: Jabra JX10
Date: 22.APR.2005 12:49:41



Delta 1 [T1] RBW 10 kHz RF Att 30 dB
Ref Lvl -0.19 dB VBW 10 kHz
10 dBm 917.03406814 kHz SWT 56 ms Unit dBm

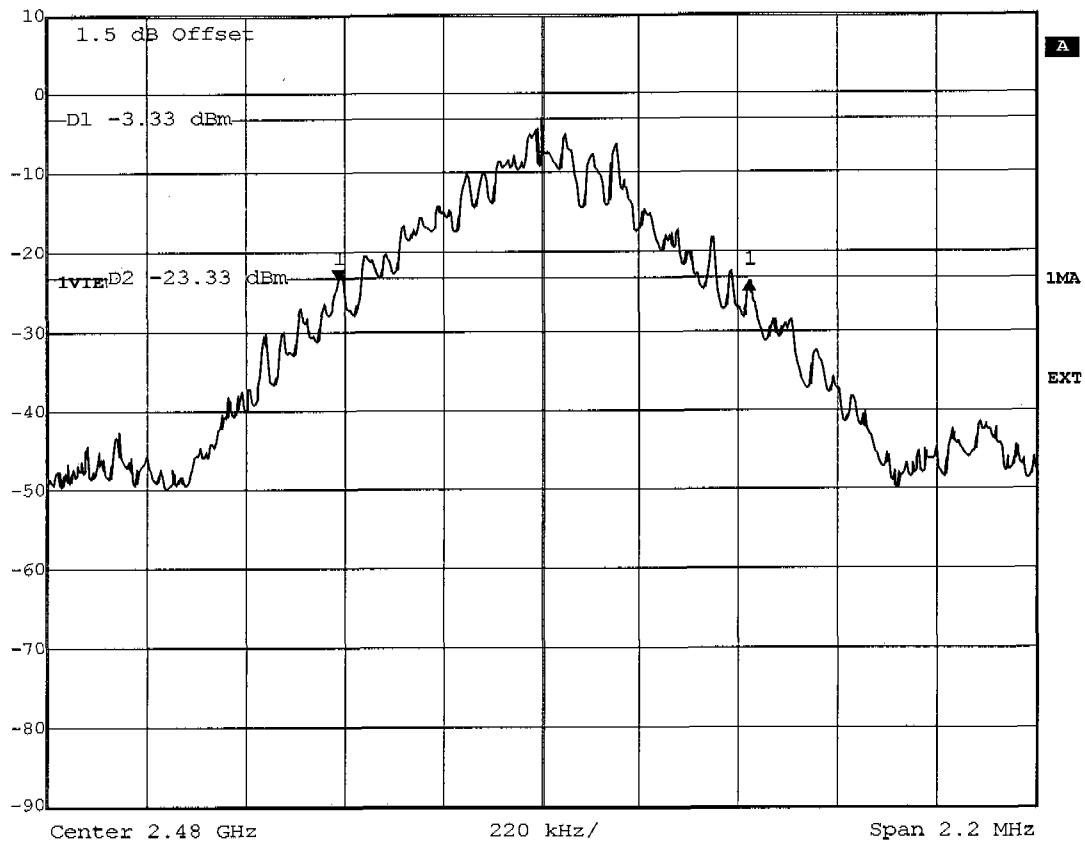


Title: -20dB Bandwidth Ch.: 78
Comment A: Jabra JX10
Date: 22.APR.2005 12:51:05

Appendix I

Band-edge Compliance of RF Emissions




Delta 1 [T1] RBW 50 kHz RF Att 40 dB
Ref Lvl 41.95 dB VBW 50 kHz
20 dBm 3.16883768 MHz SWT 5 ms Unit dBm

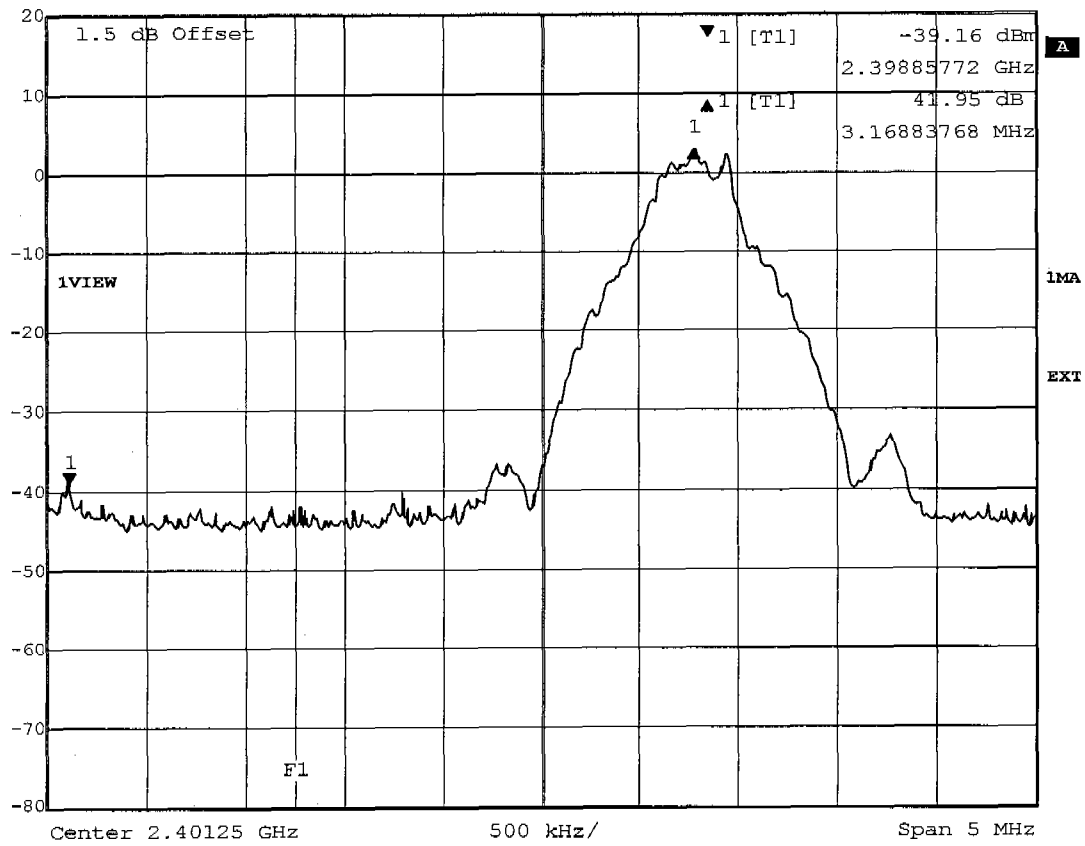

Title: Band-edge Compliance (conducted, single frequency)
Comment A: Jabra JX10
Date: 22.APR.2005 13:00:48




Delta 1 [T1] RBW 50 kHz RF Att 40 dB
Ref Lvl 34.28 dB VBW 50 kHz
20 dBm -3.47743487 MHz SWT 5 ms Unit dBm

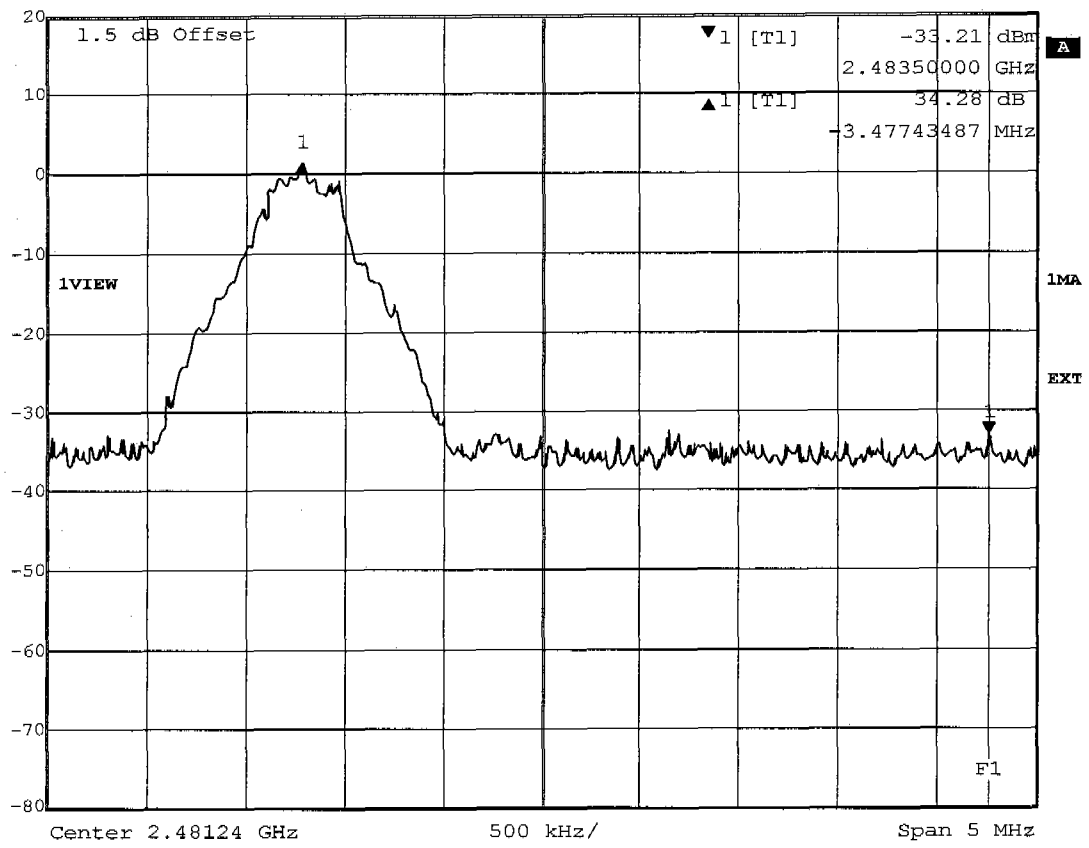

Title: Band-edge Compliance (conducted, single frequency)
Comment A: Jabra JX10
Date: 22.APR.2005 13:02:23




Delta 1 [T1] RBW 50 kHz RF Att 40 dB
Ref Lvl 35.15 dB VBW 50 kHz
20 dBm 2.47745491 MHz SWT 5 ms Unit dBm

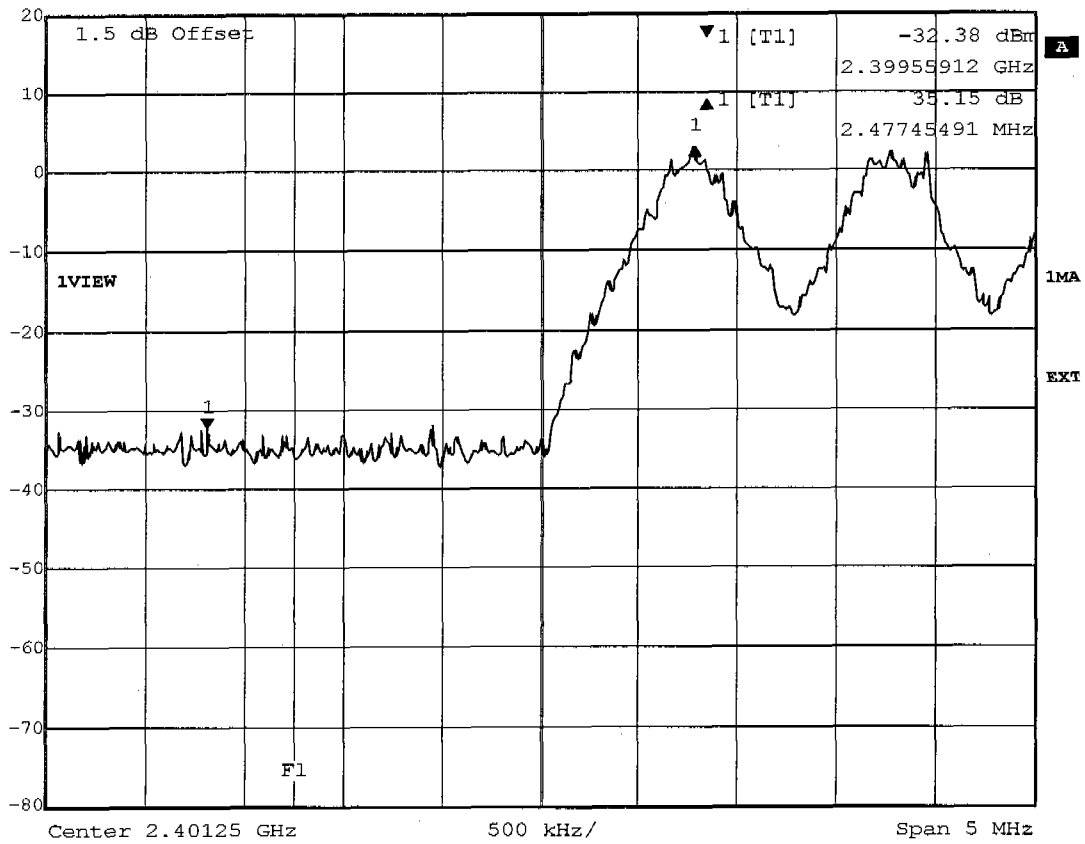

Title: Band-edge Compliance (conducted, hopping mode)
Comment A: Jabra JX10
Date: 22.APR.2005 13:31:37



Delta 1 [T1] RBW 50 kHz RF Att 40 dB
Ref Lvl 39.77 dB VBW 50 kHz
20 dBm -3.51731463 MHz SWT 5 ms Unit dBm

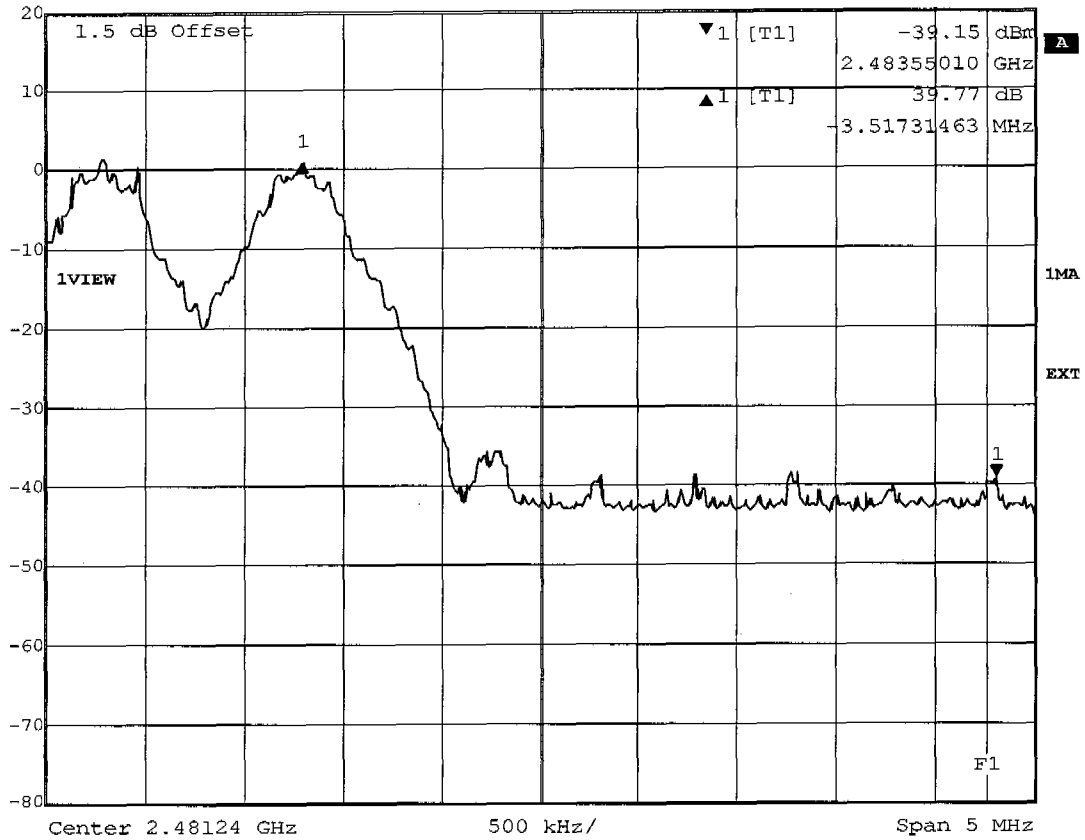


Title: Band-edge Compliance (conducted, hopping mode)
Comment A: Jabra JX10
Date: 22.APR.2005 13:24:46

Appendix J

Conducted Measurement at (AC) Power Line


EMI voltage test in the ac-mains according to FCC part 15

EUT: Jabra Headset JX10
 Manufacturer: GN Netcom A/S
 Operating Condition: Unom: 120 VAC (AC/DC-adapter), Thom: 23°C
 Test Site: ETS
 Operator: Mr. Marquardt
 Test Specification: V-Network: ESH2-Z5 (L1)
 Comment: model: Jabra JX10 mode: charging

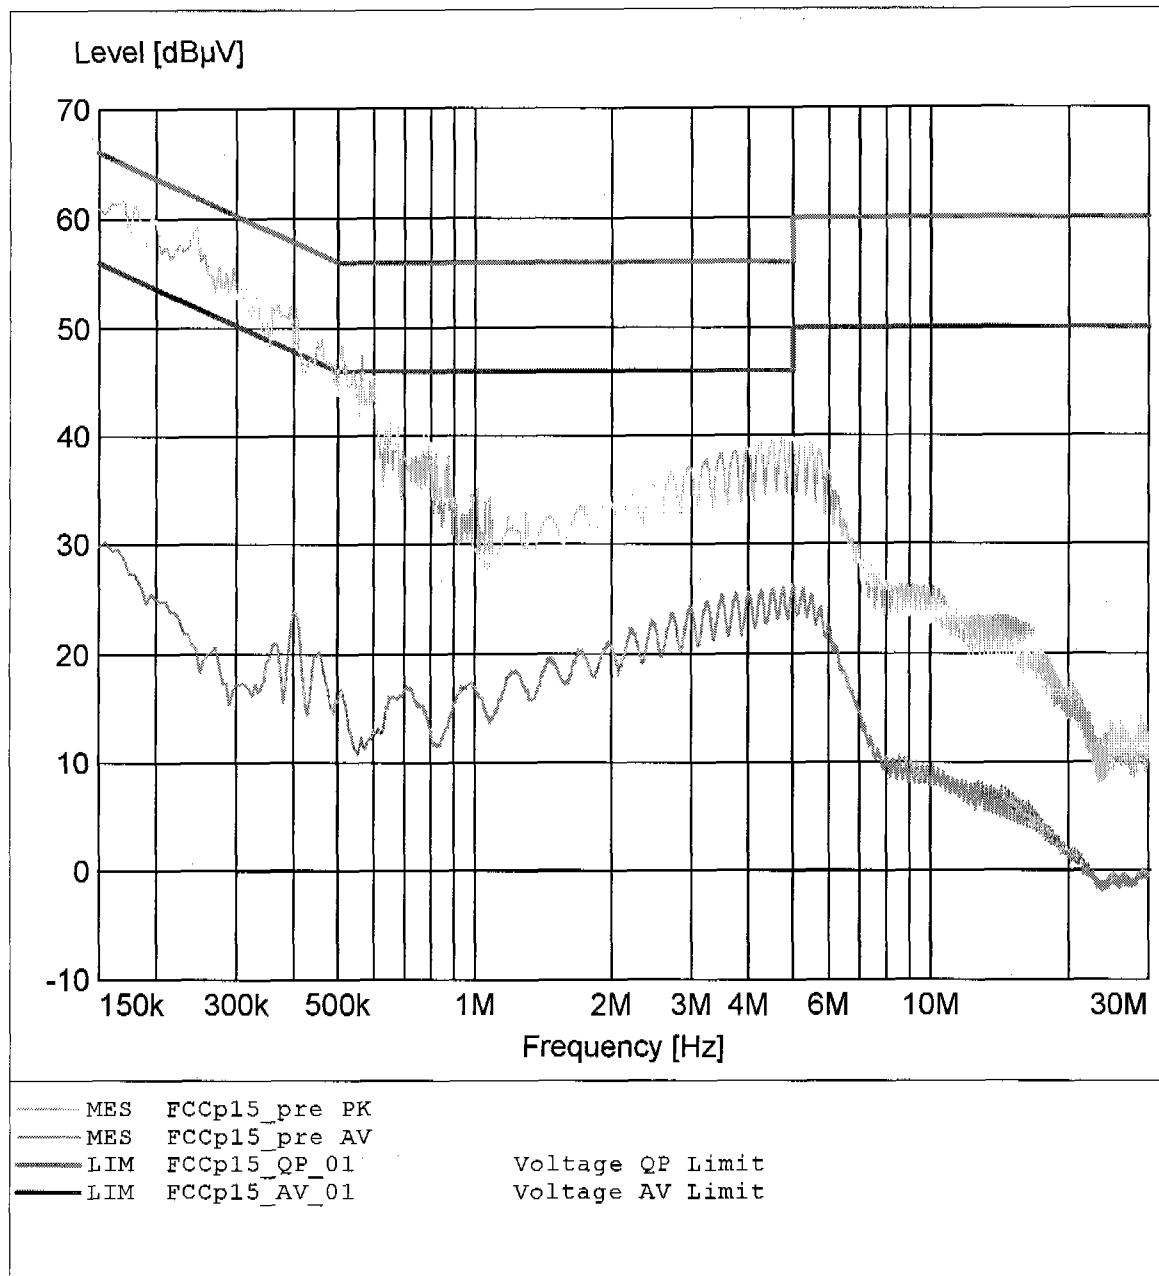


EMI voltage test in the ac-mains according to FCC part 15

EUT: Jabra Headset JX10
Manufacturer: GN Netcom A/S
Operating Condition: Unom: 120 VAC (AC/DC-adapter), Thom: 23°C
Test Site: ETS
Operator: Mr. Marquardt
Test Specification: V-Network: ESH2-Z5 (N)
Comment: model: Jabra JX10 mode: charging

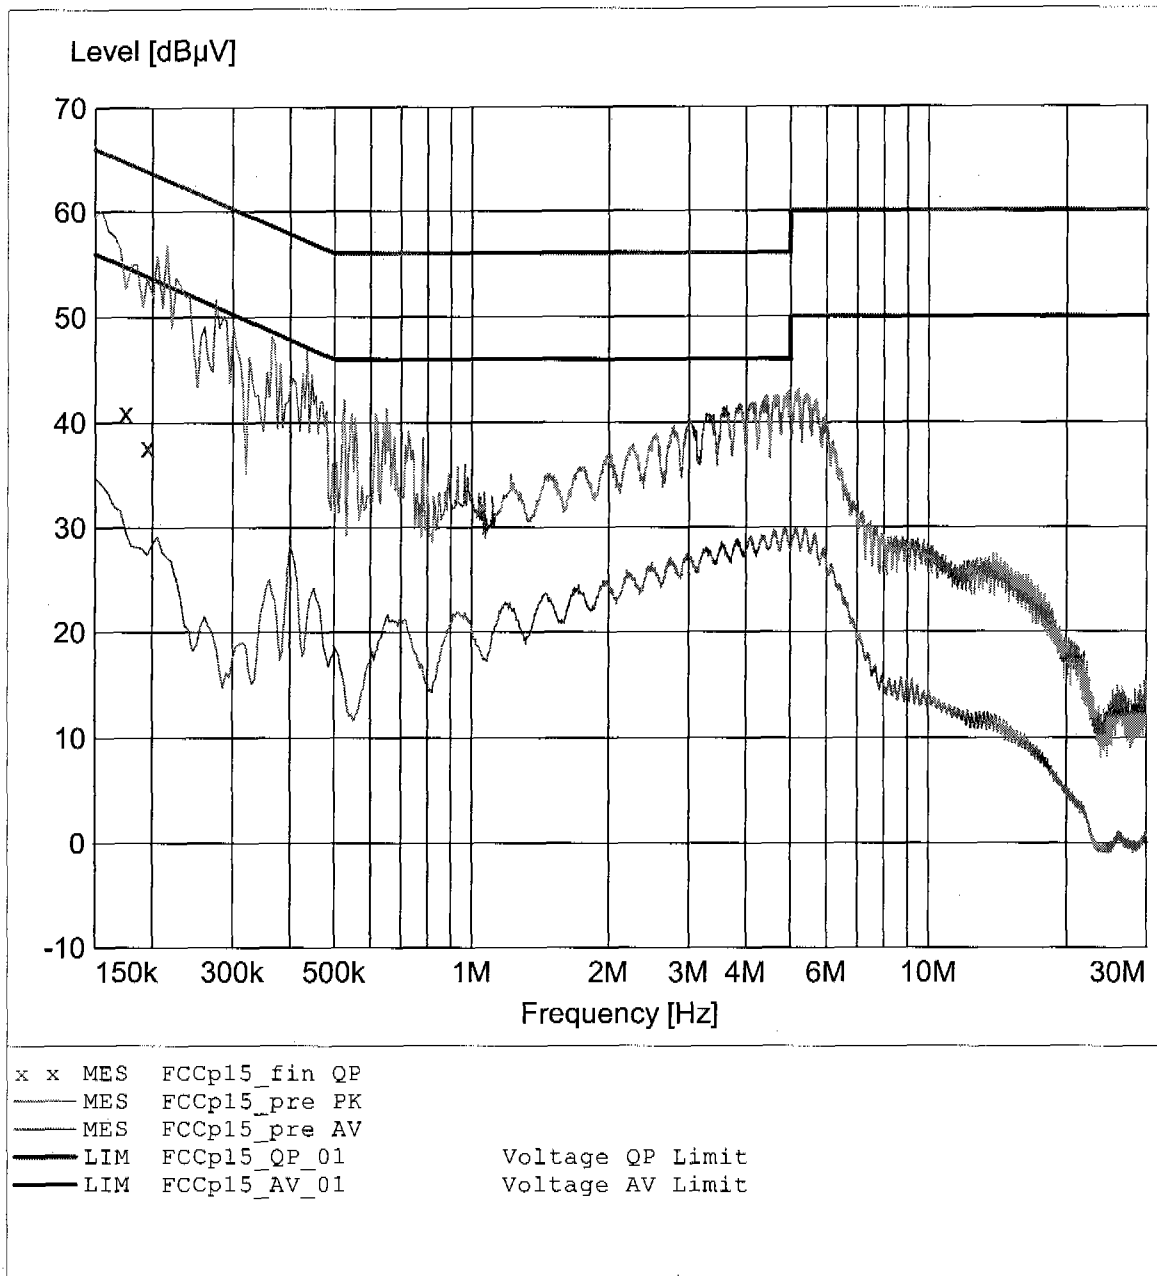

EMI voltage test in the ac-mains according to FCC part 15

EUT: Jabra Headset JX10
Manufacturer: GN Netcom A/S
Operating Condition: Unom: 120 VAC (AC/DC-adaptor), Thom: 23°C
Test Site: ETS
Operator: Mr. Marquardt
Test Specification: V-Network: ESH2-Z5 (L1)
Comment: model: Jabra JX10 mode: charging
powered via USB using Laptop CF 27

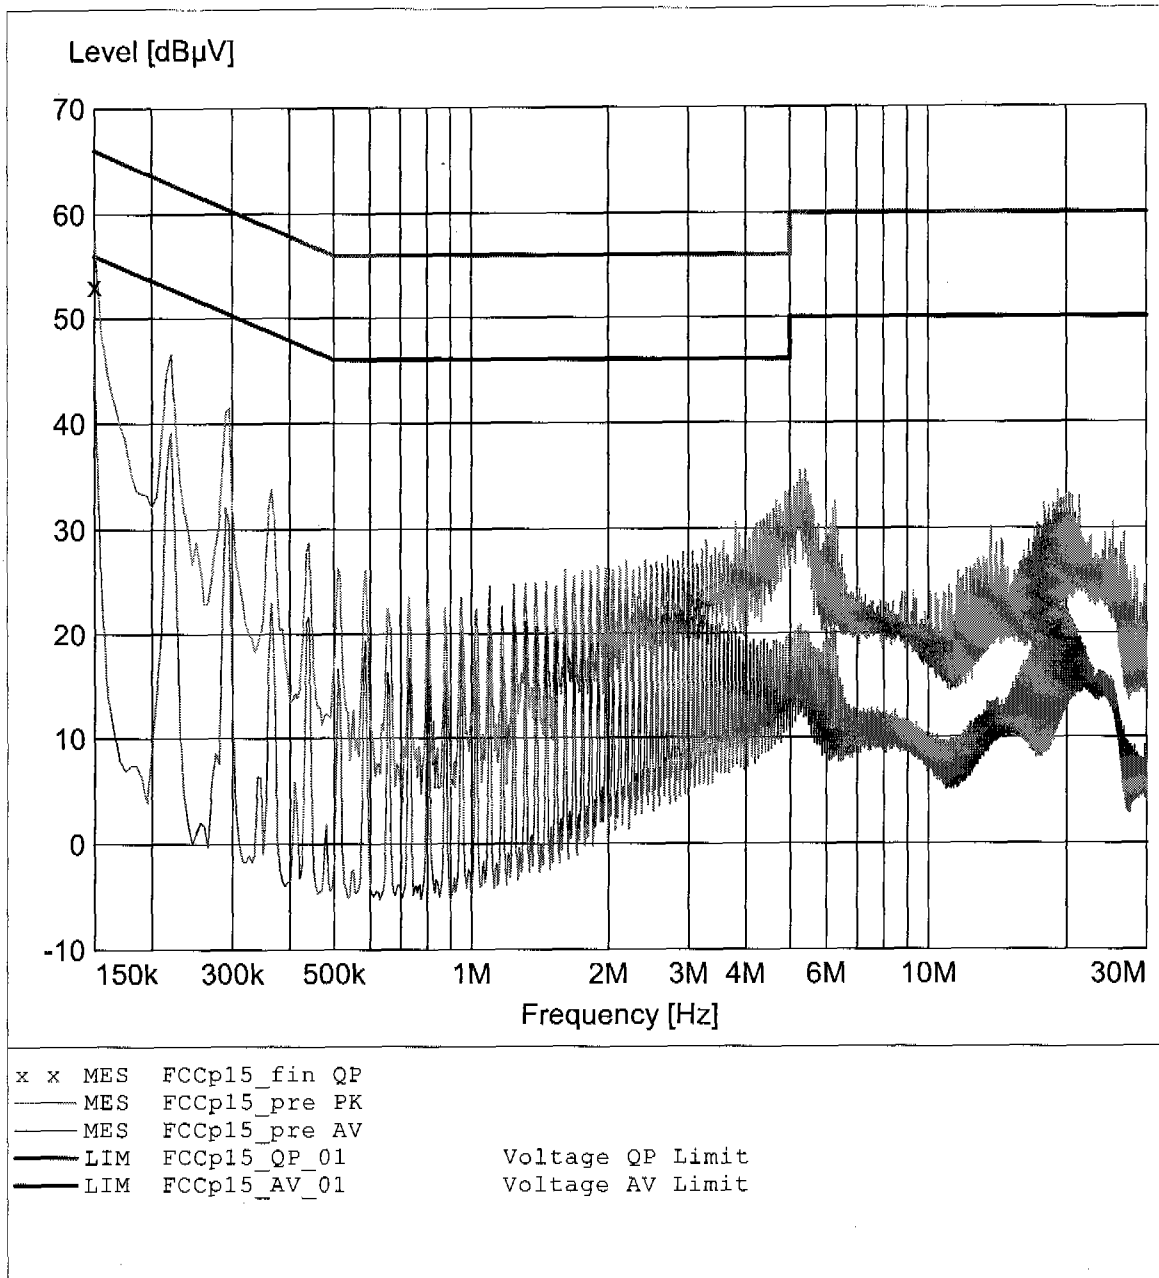

EMI voltage test in the ac-mains according to FCC part 15

EUT: Jabra Headset JX10
Manufacturer: GN Netcom A/S
Operating Condition: Unom: 120 VAC (AC/DC-adapter), Tnom: 23°C
Test Site: ETS
Operator: Mr. Marquardt
Test Specification: V-Network: ESH2-Z5 (N)
Comment: model: Jabra JX10 mode: charging
powered via USB using Laptop CF 27

