

FCC/ISED

EMC

TEST REPORT


ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
OTE921

ISSUED TO
GN Audio A/S

Lautrupbjerg 7, 2750 Ballerup, Denmark

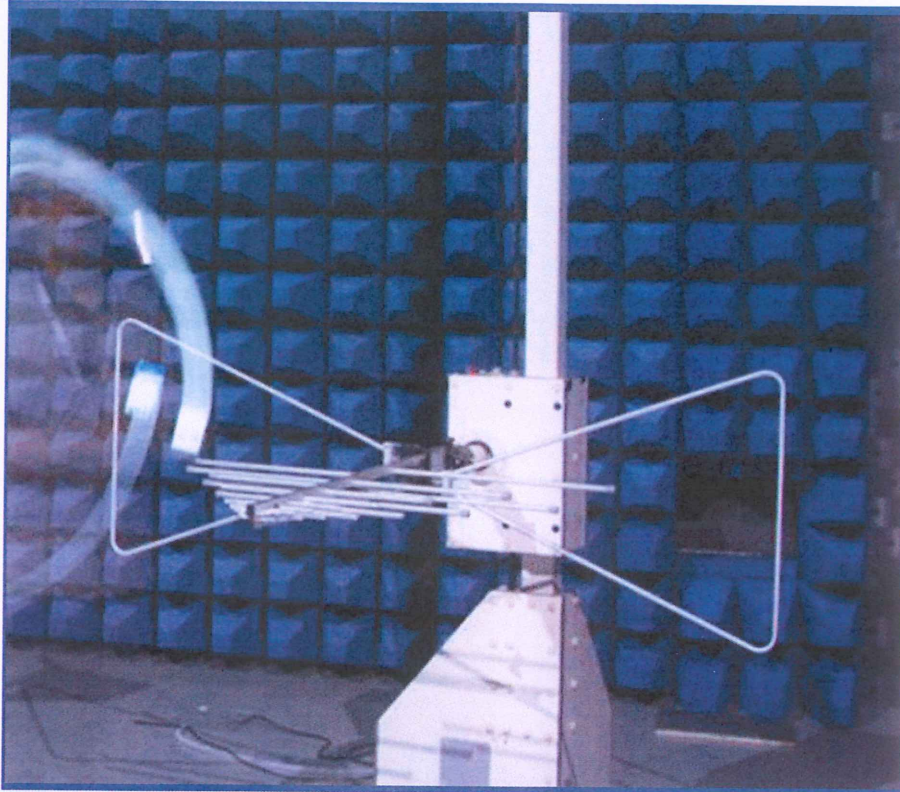

Tested by: Xia Long
Xia Long

(Engineer)

Date Jul. 01, 2019

Approved by: Wei Yanquan

Wei Yanquan

(Chief Engineer)

Date Jul. 01, 2019

Report No.: BL-SZ1930637-401

EUT Name: OTE921

Model Name: OTE921

Brand Name: BlueParrott

Test Standard: 47 CFR Part 15 Subpart B
ICES-003 (Issue 6, January 2016)

Test Conclusion: Pass

Test Date: Apr. 01, 2019 ~ May 31, 2019

Date of Issue: Jul. 01, 2019

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Jul. 01, 2019</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Identification of the Testing Laboratory	4
1.2	Identification of the Responsible Testing Location	4
1.3	Laboratory Condition	4
1.4	Announce	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information	5
2.3	Factory Information	5
2.4	General Description for Equipment under Test (EUT)	5
2.5	Ancillary Equipment	5
2.6	Technical Information	5
3	SUMMARY OF TEST RESULTS	6
3.1	Test Standards	6
3.2	Verdict	6
3.3	Test Uncertainty	6
4	GENERAL TEST CONFIGURATIONS	7
4.1	Test Environments	7
4.2	Test Equipment List	7
4.3	Test Enclosure list	8
4.4	Test Configurations	9
4.5	Test Setups	10
4.6	Test Conditions	11
5	TEST ITEMS	12
5.1	Emission Tests	12
ANNEX A	TEST RESULTS	15

A.1	Radiated Emission	15
A.2	Conducted Emission	19
ANNEX B	TEST SETUP PHOTOS	21
ANNEX C	EUT EXTERNAL PHOTOS	21
ANNEX D	EUT INTERNAL PHOTOS	21

1 GENERAL INFORMATION

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co.,Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100
Fax Number	+86 755 6182 4271

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co.,Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1. The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory is a testing organization accredited by American Association for Laboratory Accreditation(A2LA) according to ISO/IEC 17025.The accreditation certificate is 4344.01. The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report refer to the BALUN report mode v2.1.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	GN Audio A/S
Address	Lautrupbjerg 7, 2750 Ballerup, Denmark

2.2 Manufacturer Information

Manufacturer	GN Audio A/S
Address	Lautrupbjerg 7, 2750 Ballerup, Denmark

2.3 Factory Information

Factory	VTech (Dongguan) Telecommunications Limited
Address	Xia Ling Bei Management Zone, Liao Bu District, Dongguan , Guangdong, P.R China, Postcode: 523411

2.4 General Description for Equipment under Test (EUT)

EUT Name	OTE921
Model Name Under Test	OTE921
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	1.00
Software Version	0.12
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	N/A
	Model No.	P652030
	Serial No.	N/A
	Capacity	380mAh
	Rated Voltage	3.7 V
	Limit Charge Voltage	4.2 V
Ancillary Equipment 2	USB Cable	
	Length (Approx.)	1.2 m

2.6 Technical Information

The Highest Speed of Processor	N/A
Network and Wireless connectivity	Bluetooth, NFC

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	FCC 47 CFR Part 15 Subpart B (10-1-17 Edition)	Unintentional Radiators
2	ICES-003 (Issue 6, January 2016)	Information Technology Equipment (Including Digital Apparatus) — Limits and Methods of Measurement
3	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3.2 Verdict

No.	Description	FCC Rule	ISED Rule	Test Verdict	Result
1	Radiated Emission	15.109	ICES-003 6.1	Pass	Annex A .1
2	Conducted Emission, AC Ports	15.107	ICES-003 6.2	Pass	Annex A .2

3.3 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions (9 kHz-30 MHz)	3.23 dB
Radiated emissions (30 MHz-1 GHz)	4.30 dB
Radiated emissions (1 GHz-18 GHz)	4.81 dB
Radiated emissions (18 GHz-40 GHz)	5.71 dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

Environment Parameter	Selected Values During Tests			
	Temperature	Voltage	Relative Humidity	Ambient Pressure
Normal Temperature, Normal Voltage (NTNV)	23°C to 25°C	DC 3.7 V from Battery or DC 5 V from USB Port	50% to 55%	100 kPa to 102 kPa

4.2 Test Equipment List

Radiated Emission Test For Frequency Below 1 GHz						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2018.06.13	2019.06.12	☒
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9163	9163-977	2017.07.22	2019.07.21	☒
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	9120D-1600	2018.07.11	2020.07.10	☐
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2020.02.20	☒
Test Software	BALUN	BL410_E	V18.626	--	--	☒

Radiated Emission Test For Frequency Above 1 GHz						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2018.11.07	2019.11.06	☒
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9163	9163-624	2017.07.22	2019.07.21	☐
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	9120D-1148	2018.07.11	2020.07.10	☒
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2020.02.20	☒
Test Software	BALUN	BL410_E	V18.626	--	--	☒

Conducted Emission Test						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2018.06.13	2019.06.12	☒
LISN	SCHWARZBECK	NSLK 8127	8127-687	2018.06.13	2019.06.12	☒
ISN	TESEQ	ISN T800	34449	2018.11.16	2019.11.15	☐
Shielded Enclosure	ChangNing	CN-130701	130703	N/A	N/A	☒
Test Software	BALUN	BL410_E	V18.626	--	--	☒

4.3 Test Enclosure list


Description	Manufacturer	Model	Serial No.	Length	Description	Use
PC	N/A	N/A	N/A	N/A	Special Handled	☐
Laptop	Apple	A1465	N/A	N/A	N/A	☒
Printer	HP	DESKJET 1000	N/A	N/A	N/A	☒
Keyboard	Logitech	Y-BP62a	N/A	N/A	N/A	☒
Mouse	Logitech	M100	N/A	N/A	N/A	☒
USB disk	Kingston	N/A	N/A	N/A	N/A	☐
TF Card	Kingston	N/A	N/A	N/A	N/A	☐
VGA Cable	N/A	N/A	N/A	1.5 m	Shielded with core	☐
HDMI Cable	N/A	N/A	N/A	1.5 m	Shielded with core	☐
DVI Cable	N/A	N/A	N/A	1.5 m	Shielded with core	☐
Coaxial video cable	N/A	N/A	N/A	2.0 m	Shielded with core	☐
Audio Cable	N/A	N/A	N/A	0.5 m	Shielded with core	☐
iPhone	Apple	A1586	N/A	N/A	N/A	☐
Bluetooth Earphone	SAMSUNG	Gear Circle	N/A	N/A	N/A	☐
Wireless Communications Test Set	R&S	CMW500	142028	N/A	Cal. Due 2019.06.14	☐
WIFI Router	TP-LINK	TL-WDR7500	N/A	N/A	N/A	☐
Earphone	N/A	OPPO	N/A	1.1 m	N/A	☐
Car Battery	Camel	55530	N/A	N/A	12 V/55 Ah	☐
Artificial load	N/A	N/A	N/A	N/A	2.5 Ω /100 W	☐
Artificial load	N/A	N/A	N/A	N/A	5 Ω /100 W	☐
Electronic Load	ITECH	IT8511	N/A	N/A	N/A	☐
USB Cable	N/A	N/A	N/A	1.5 m	Shielded with core	☐
DC Power Supply	ITECH	IT6863A	60001401068 7210006	N/A	N/A	☐
LCD Monitor	SAMSUNG	UA32C4000P	N/A	N/A	N/A	☐
RJ45 Cable	N/A	N/A	N/A	1.5 m	Shielded with core	☐
Adapter	OPPO	AK903HK	N/A	N/A	N/A	☒
Phone	OPPO	CPH1701	N/A	N/A	N/A	☒
Display Screen	N/A	N/A	N/A	N/A	N/A	☒

4.4 Test Configurations

Test Configurations (TC) No.	Description
TC01	<u>The BT Audio Play Test Mode</u> EUT + Battery + USB Cable + Adapter + Phone + BT Link
TC02	<u>The NFC Test Mode</u> EUT + Battery + USB Cable + Adapter + Phone + NFC TX
TC03	<u>The USB Test Mode</u> EUT + Battery + USB Cable + Mouse + Keyboard + Laptop + Display Screen + Printer + BT Link + Phone


4.5 Test Setups

Test Setup 1

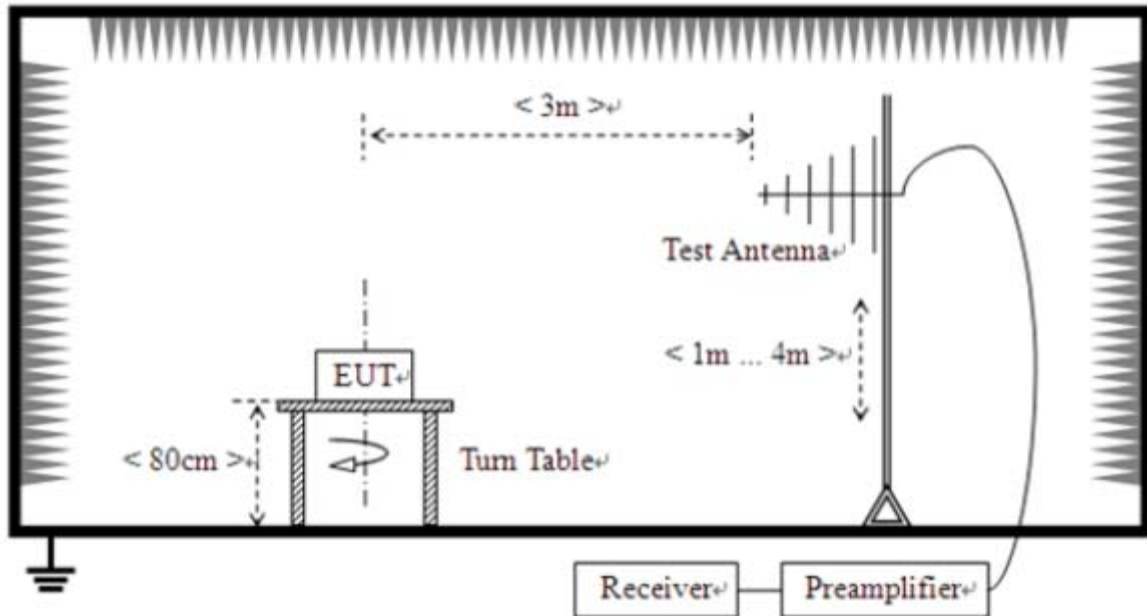


(For Radiated Emission Test (30 MHz-1 GHz))

Test Setup 2

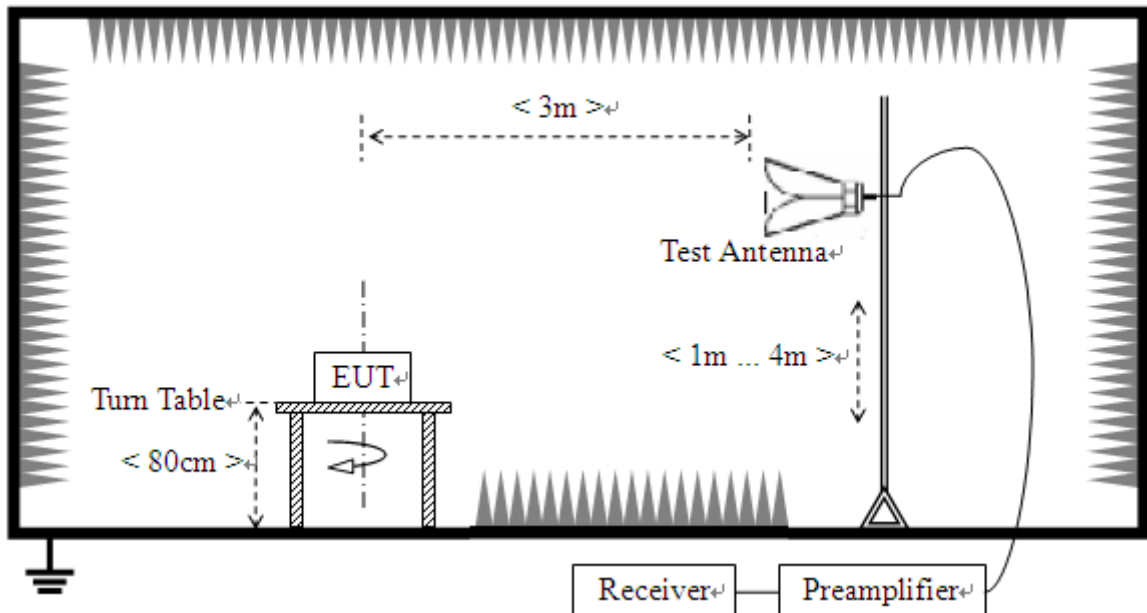

(For Radiated Emission Test (above 1 GHz))

Test Setup 3

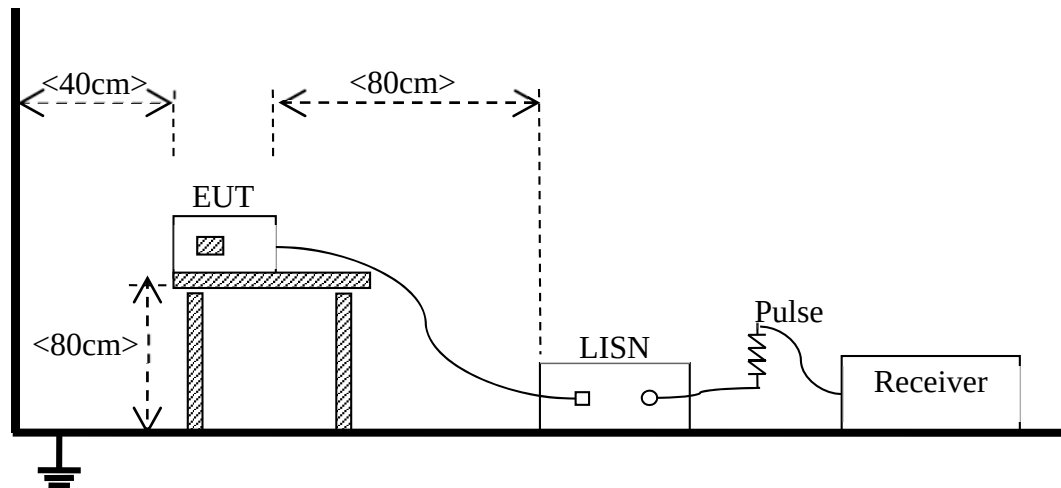

(For Conducted Emission, AC Ports Test)

4.6 Test Conditions

Test Case	Test Conditions	
Radiated Emission	Test Env.	NTNV
	Test Setup	Test Setup 1&2
	Test Configuration	TC01~TC03 ^{Note}
Conducted Emission, AC Ports	Test Env.	NTNV
	Test Setup	Test Setup 3
	Test Configuration	TC01~TC03 ^{Note}
Note: Based on client request, all normal using modes of the normal function were tested but only the worst test data of the worst mode is reported by this report. The USB Test Mode is the worst mode in this report.		

5 TEST ITEMS

5.1 Emission Tests

5.1.1 Radiated Emission

5.1.1.1 Limit

Frequency range (MHz)	Class B (at 3 m)		Class B (at 10 m)	Class A (at 10 m)	
	Field Strength (μV/m)	Field Strength (dBμV/m)	Field Strength (dBμV/m)	Field Strength (μV/m)	Field Strength (dBμV/m)
30 - 88	100	40	30	90	39
88 - 216	150	43.5	33.5	150	43.5
216 - 960	200	46	36	210	46.4
Above 960	500	54	44	300	49.5

NOTE:

- 1) Field Strength (dBμV/m) = 20*log [Field Strength (μV/m)].
- 2) In the emission tables above, the tighter limit applies at the band edges.
- 3) The limits using ANSI C63.4.

5.1.1.2 Test Setup

Refer to 4.5 section (test setup 1 to test setup 2) for radiated emission test, the photo of test setup please refer to ANNEX B.

5.1.1.3 Test Procedure

The test employing the methods of measurement described in the publication referenced in Section 3(b) (ANSI C63.4);

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.

5.1.1.4 Test Result

Please refer to ANNEX A.1.

NOTE:

1. Results (dBuV/m) = Reading (dBuV) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain (dB)

3. Over limit = Results – Limit.

5.1.2 Conducted Emission

5.1.2.1 Test Limit

Frequency range (MHz)	Class A	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	79	66
0.50 - 30	73	60

Frequency range (MHz)	Class B	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- 1) The lower limit shall apply at the band edges.
- 2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.
- 3) The limit using ANSI C63.4.

5.1.2.2 Test Setup

Refer to 4.5 section test (test setup 3) for conducted emission, the photo of test setup please refer to ANNEX B.

5.1.2.3 Test Procedure

The test employing the methods of measurement described in the publication referenced in Section 3(b) (ANSI C63.4);

The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.1.2.4 Test Result

Please refer to ANNEX A.2.

NOTE:

1. Results (dB μ V/m) = Reading (dB μ V) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor = Insertion loss + Cable loss

3. Over limit = Results – Limit.

ANNEX A TEST RESULTS

A.1 Radiated Emission

Note 1: The symbol of “--” in the table which means not application.


Note 2: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: This frequency which near 2.4 GHz with circle should be ignored because they are Bluetooth carrier frequency.

Test Data and Plots


The USB Test Mode

A.1.1 Test Antenna Vertical, 30 MHz – 1 GHz

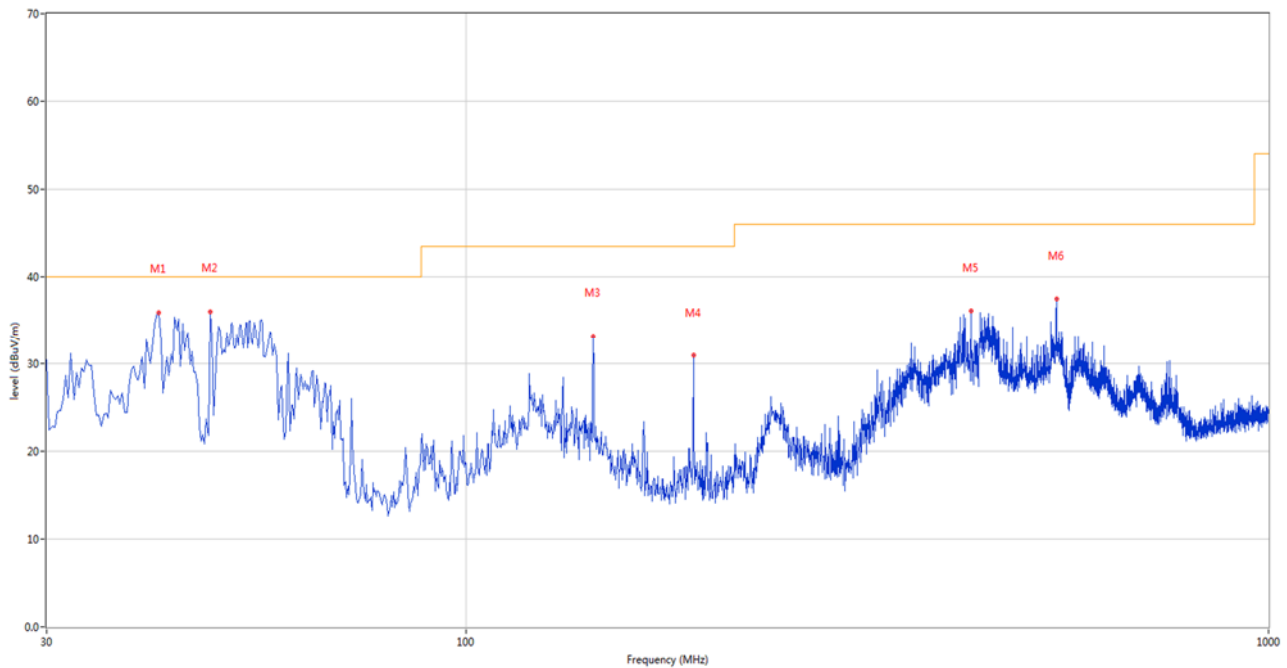

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	41.398	35.90	-23.93	40.0	-4.10	Peak	1.60	100	Vertical	Pass
2	47.945	36.00	-23.36	40.0	-4.00	Peak	73.40	100	Vertical	Pass
3	143.975	33.19	-28.12	43.5	-10.31	Peak	357.50	200	Vertical	Pass
4	191.990	30.92	-25.04	43.5	-12.58	Peak	168.20	100	Vertical	Pass
5	425.517	36.08	-18.61	46.0	-9.92	Peak	143.30	100	Vertical	Pass
6	544.100	37.44	-16.02	46.0	-8.56	Peak	360.00	200	Vertical	Pass


A.1.2 Test Antenna Horizontal, 30 MHz – 1 GHz

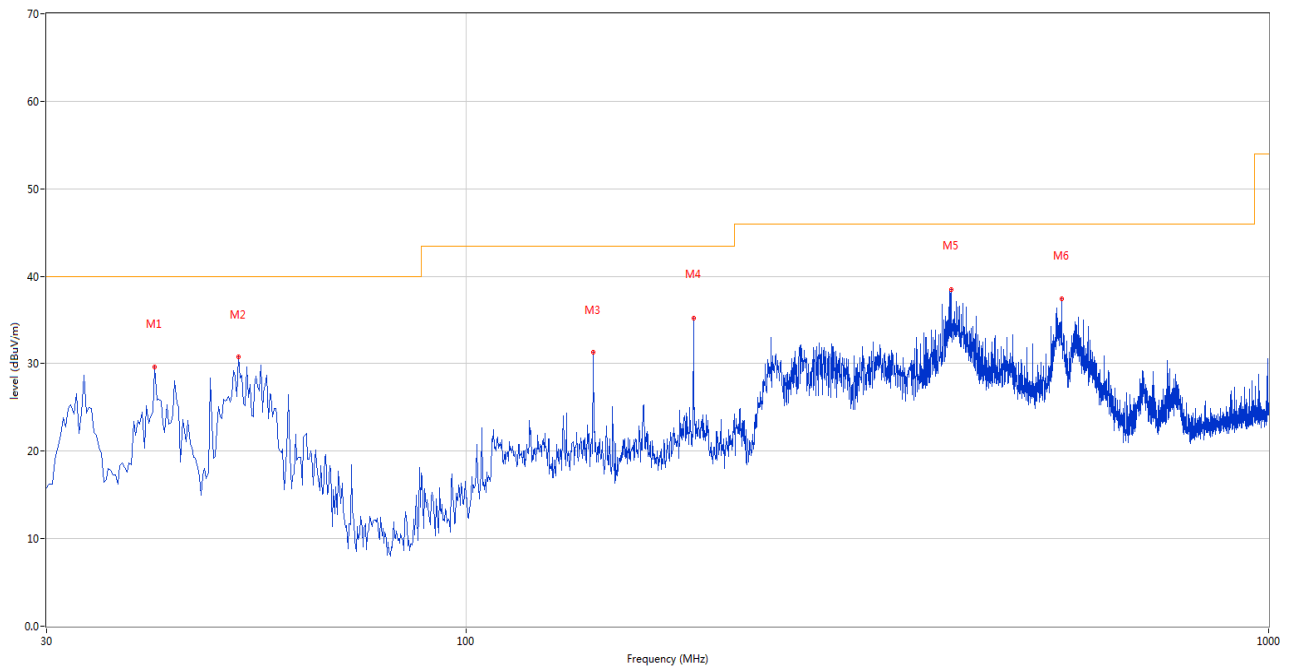

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	40.913	29.60	-24.12	40.0	-10.40	Peak	281.40	200	Horizontal	Pass
2	52.068	30.69	-23.29	40.0	-9.31	Peak	358.00	200	Horizontal	Pass
3	143.975	31.24	-28.12	43.5	-12.26	Peak	71.70	100	Horizontal	Pass
4	191.990	35.30	-25.04	43.5	-8.20	Peak	108.40	200	Horizontal	Pass
5	401.995	38.57	-19.25	46.0	-7.43	Peak	36.50	100	Horizontal	Pass
6	552.102	37.45	-15.94	46.0	-8.55	Peak	29.40	100	Horizontal	Pass


Test Data and Plots (Above 1 GHz)

A.1.3 Test Antenna Vertical, 1 GHz – 12.75 GHz

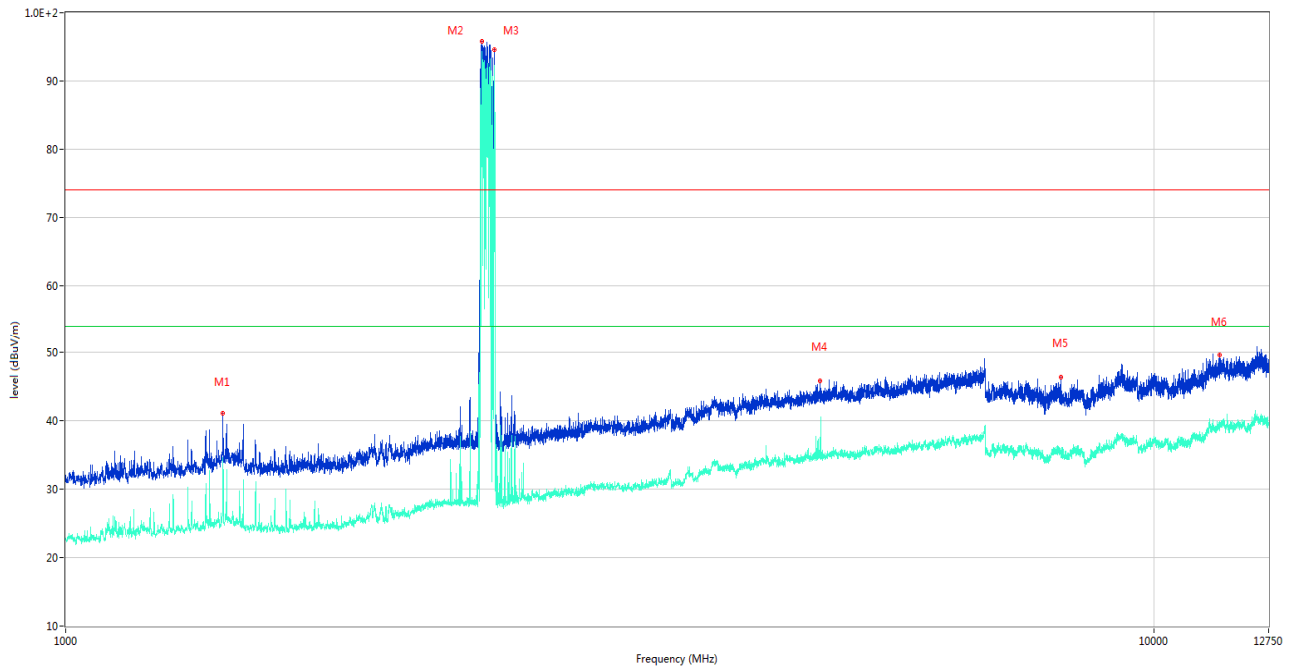

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1394.500	33.20	-18.80	54.0	-20.80	AV	30.70	100	Vertical	Pass
1	1394.500	41.10	-18.80	74.0	-32.90	Peak	30.70	100	Vertical	Pass
2**	2411.000	90.66	-14.60	54.0	36.66	AV	172.30	100	Vertical	N/A
2	2411.000	95.87	-14.60	74.0	21.87	Peak	172.30	100	Vertical	N/A
3**	2478.000	89.44	-15.23	54.0	35.44	AV	150.70	100	Vertical	N/A
3	2478.000	94.64	-15.23	74.0	20.64	Peak	150.70	100	Vertical	N/A
4**	4938.000	34.82	-4.80	54.0	-19.18	AV	197.50	100	Vertical	Pass
4	4938.000	45.88	-4.80	74.0	-28.12	Peak	197.50	100	Vertical	Pass
5**	8208.937	35.69	16.29	54.0	-18.31	AV	0.50	100	Vertical	Pass
5	8208.937	46.39	16.29	74.0	-27.61	Peak	0.50	100	Vertical	Pass
6**	11497.938	39.71	19.88	54.0	-14.29	AV	1.00	100	Vertical	Pass
6	11497.938	49.70	19.88	74.0	-24.30	Peak	1.00	100	Vertical	Pass

A.1.4 Test Antenna Horizontal, 1 GHz – 12.75 GHz

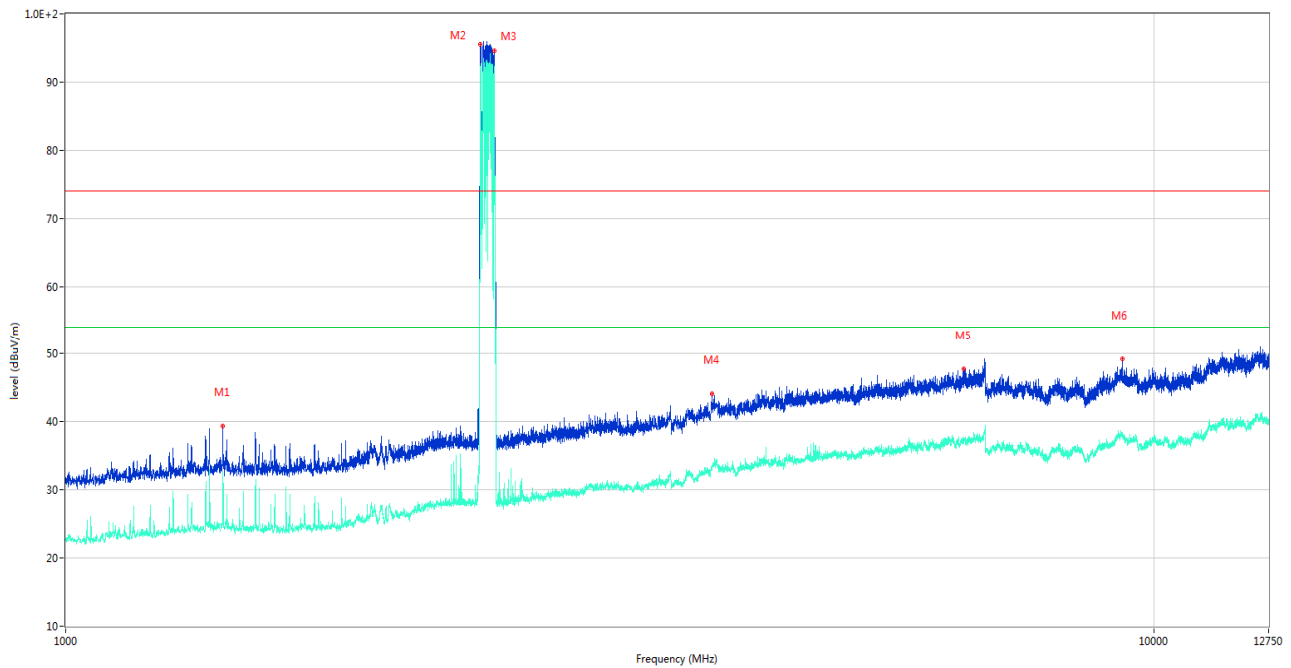


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1394.500	31.70	-18.80	54.0	-22.30	AV	359.60	100	Horizontal	Pass
1	1394.500	39.40	-18.80	74.0	-34.60	Peak	359.60	100	Horizontal	Pass
2**	2404.000	90.08	-14.64	54.0	36.08	AV	148.90	100	Horizontal	N/A
2	2404.000	95.56	-14.64	74.0	21.56	Peak	148.90	100	Horizontal	N/A
3**	2477.000	89.90	-15.22	54.0	35.90	AV	124.40	100	Horizontal	N/A
3	2477.000	94.63	-15.22	74.0	20.63	Peak	124.40	100	Horizontal	N/A
4**	3923.000	32.93	-4.99	54.0	-21.07	AV	354.80	100	Horizontal	Pass
4	3923.000	44.12	-4.99	74.0	-29.88	Peak	354.80	100	Horizontal	Pass
5**	6692.000	37.01	-2.57	54.0	-16.99	AV	360.00	100	Horizontal	Pass
5	6692.000	47.77	-2.57	74.0	-26.23	Peak	360.00	100	Horizontal	Pass
6**	9351.750	38.11	19.34	54.0	-15.89	AV	155.50	100	Horizontal	Pass
6	9351.750	49.26	19.34	74.0	-24.74	Peak	155.50	100	Horizontal	Pass

A.2 Conducted Emission

Test Data and Plots


The USB Test Mode

A.2.1 L Phase

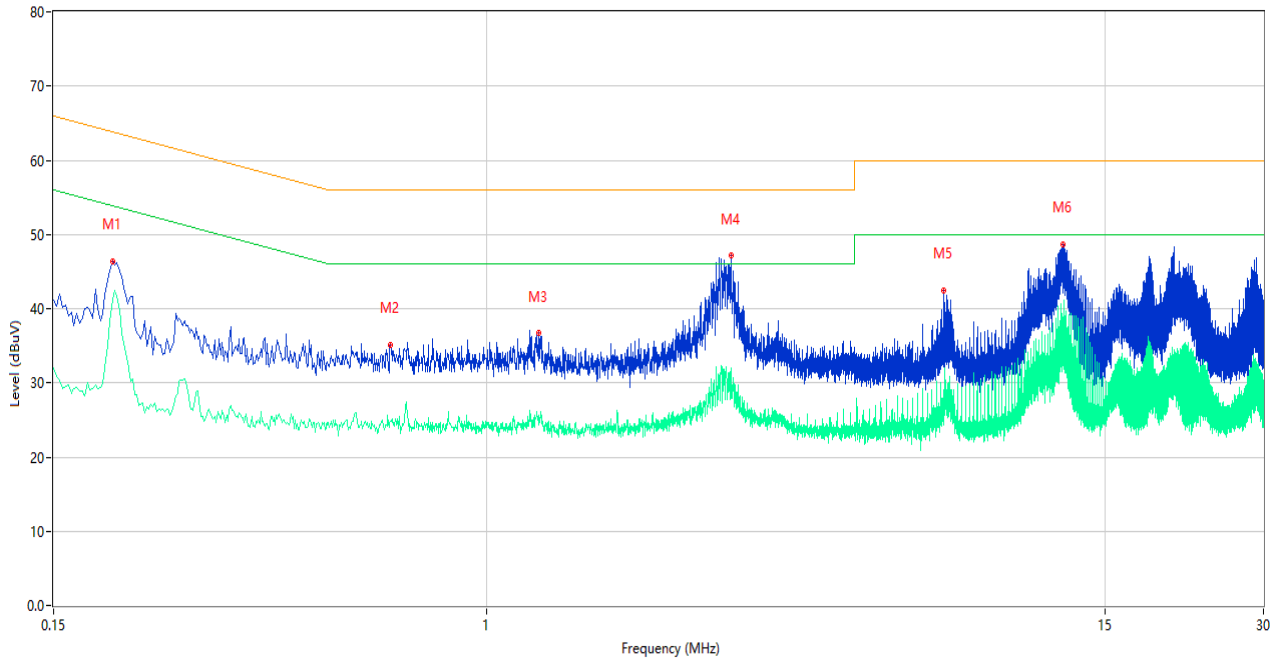

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.194	46.40	10.38	63.86	-17.46	Peak	L	Pass
1**	0.194	41.13	10.38	53.86	-12.73	AV	L	Pass
2	0.656	35.13	10.27	56.00	-20.87	Peak	L	Pass
2**	0.656	24.86	10.27	46.00	-21.14	AV	L	Pass
3	1.258	36.66	10.25	56.00	-19.34	Peak	L	Pass
3**	1.258	24.40	10.25	46.00	-21.60	AV	L	Pass
4	2.912	47.11	10.28	56.00	-8.89	Peak	L	Pass
4**	2.912	31.96	10.28	46.00	-14.04	AV	L	Pass
5	7.388	42.51	10.35	60.00	-17.49	Peak	L	Pass
5**	7.388	28.99	10.35	50.00	-21.01	AV	L	Pass
6	12.478	48.70	10.39	60.00	-11.30	Peak	L	Pass
6**	12.478	38.22	10.39	50.00	-11.78	AV	L	Pass

A.2.2 N Phase

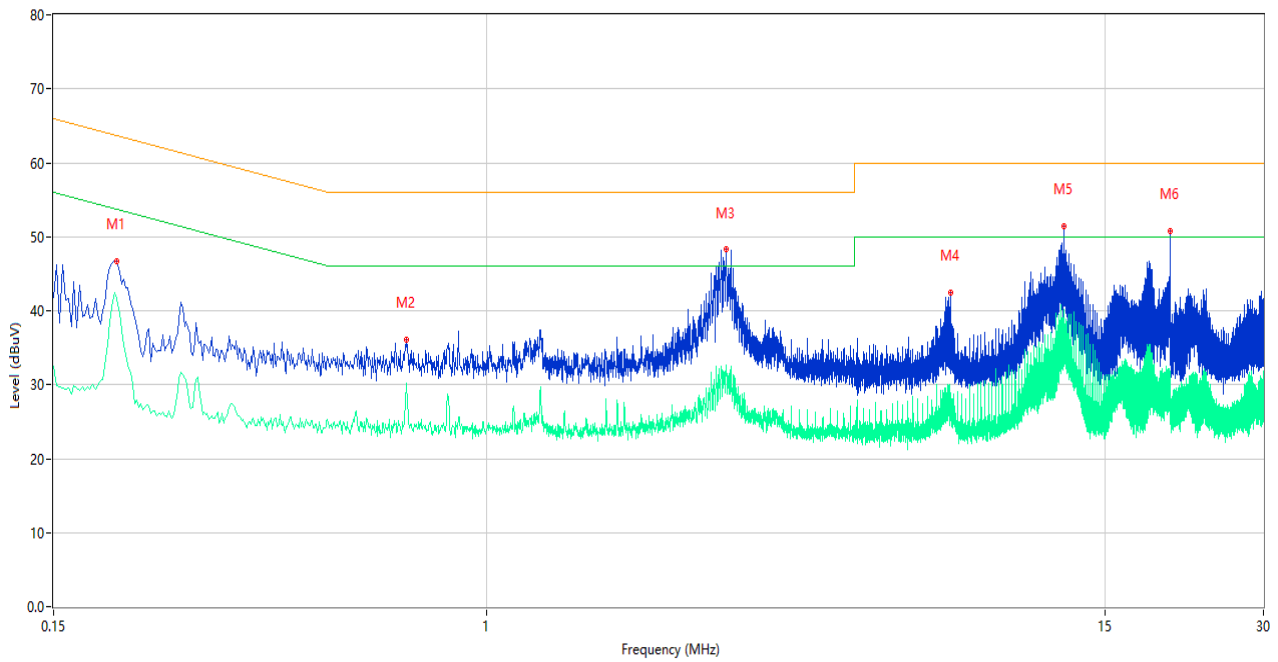

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.198	46.68	10.38	63.69	-17.01	Peak	N	Pass
1**	0.198	41.60	10.38	53.69	-12.09	AV	N	Pass
2	0.702	36.14	10.26	56.00	-19.86	Peak	N	Pass
2**	0.702	30.17	10.26	46.00	-15.83	AV	N	Pass
3	2.848	48.26	10.28	56.00	-7.74	Peak	N	Pass
3**	2.848	32.58	10.28	46.00	-13.42	AV	N	Pass
4	7.634	42.41	10.34	60.00	-17.59	Peak	N	Pass
4**	7.634	28.90	10.34	50.00	-21.10	AV	N	Pass
5	12.508	51.35	10.39	60.00	-8.65	Peak	N	Pass
5**	12.508	40.10	10.39	50.00	-9.90	AV	N	Pass
6	19.930	50.78	10.55	60.00	-9.22	Peak	N	Pass
6**	19.930	31.00	10.55	50.00	-19.00	AV	N	Pass

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ1930637-AE-1.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ1930637-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ1930637-AI.PDF”.

--END OF REPORT--