

APPENDIX D: SAR TISSUE SPECIFICATIONS

| | | |
|--------------------|--------------------|-----------------------------------|
| FCC ID: BCG-A3326 | RF EXPOSURE REPORT | Approved by: Technical Manager |
| DUT Type: Watch | | APPENDIX D: Page 1 of 4 |

Measurement Procedure for Tissue verification:

- 1) The network analyzer and probe system were configured and calibrated.
- 2) The probe was immersed in the tissue. The tissue was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured.
- 4) The complex relative permittivity ϵ' can be calculated from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\epsilon_r\epsilon_0}{[\ln(b/a)]^2} \int_a^b \int_a^b \int_0^\pi \cos\phi' \frac{\exp[-j\omega r(\mu_0\epsilon_r'\epsilon_0)^{1/2}]}{r} d\phi' d\rho' d\rho$$

where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively, $r^2 = \rho^2 + \rho'^2 - 2\rho\rho' \cos\phi'$, ω is the angular frequency, and $j = \sqrt{-1}$.

3 Composition / Information on ingredients

3.2 Mixtures

Description: Aqueous solution with surfactants and inhibitors

Declarable, or hazardous components:

| | | |
|--|---|-----------|
| CAS: 107-21-1 EINECS: 203-473-3 Reg.nr.: 01-2119456816-28-0000 | Ethenediol STOT RE 2, H373; Acute Tox. 4, H302 | >1.0-4.9% |
| CAS: 68608-26-4 EINECS: 271-781-5 Reg.nr.: 01-2119527859-22-0000 | Sodium petroleum sulfonate Eye Irrit. 2, H319 | < 2.9% |
| CAS: 107-41-5 EINECS: 203-489-0 Reg.nr.: 01-2119539582-35-0000 | Hexylene Glycol / 2-Methyl-pentane-2,4-diol Skin Irrit. 2, H315; Eye Irrit. 2, H319 | < 2.9% |
| CAS: 68920-66-1 NLP: 500-236-9 Reg.nr.: 01-2119489407-26-0000 | Alkoxyated alcohol, > C₁₆ Aquatic Chronic 2, H411; Skin Irrit. 2, H315; Eye Irrit. 2, H319 | < 2.0% |

Additional information:

For the wording of the listed risk phrases refer to section 16.

Not mentioned CAS-, EINECS- or registration numbers are to be regarded as Proprietary/Confidential.

The specific chemical identity and/or exact percentage concentration of proprietary components is withheld as a trade secret.

Figure D-1

Note: Liquid recipes are proprietary SPEAG. Since the composition is approximate to the actual liquids utilized, the manufacturer tissue-equivalent liquid data sheets are provided below.

| | | |
|--------------------|--------------------|-----------------------------------|
| FCC ID: BCG-A3326 | RF EXPOSURE REPORT | Approved by: Technical Manager |
| DUT Type: Watch | | APPENDIX D: Page 2 of 4 |

Measurement Certificate / Material Test

| | |
|--------------|--|
| Item Name | Head Tissue Simulating Liquid (HBL600-10000V6) |
| Product No. | SL AAH U16 CA (Batch: 250317-1) |
| Manufacturer | SPEAG |

Measurement Method

TSL dielectric parameters measured using calibrated DAK probe.

Target Parameters

Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.

Test Condition



Ambient Condition 22°C ; 30% humidity
 TSL Temperature 22°C
 Test Date 20-Mar-25
 Operator CL

Additional Information

TSL Density
 TSL Heat-capacity

Results

| f [MHz] | Measured | | | Target | | Diff. to Target [%] | |
|---------|-------------|--------------|-------|--------|-------|---------------------|----------------|
| | ϵ' | ϵ'' | sigma | eps | sigma | $\Delta\epsilon$ | $\Delta\sigma$ |
| 600 | 45.3 | 24.6 | 0.82 | 42.7 | 0.88 | 6.0 | -7.0 |
| 750 | 44.7 | 20.9 | 0.87 | 41.9 | 0.89 | 6.6 | -2.6 |
| 800 | 44.6 | 20.0 | 0.89 | 41.7 | 0.90 | 7.0 | -0.8 |
| 825 | 44.5 | 19.8 | 0.90 | 41.6 | 0.91 | 7.0 | -0.7 |
| 835 | 44.5 | 19.4 | 0.91 | 41.5 | 0.91 | 7.1 | -0.2 |
| 850 | 44.4 | 19.2 | 0.91 | 41.5 | 0.92 | 7.0 | -0.7 |
| 900 | 44.3 | 18.5 | 0.93 | 41.5 | 0.97 | 6.7 | -4.1 |
| 1400 | 43.4 | 14.7 | 1.14 | 40.6 | 1.18 | 6.9 | -3.3 |
| 1450 | 43.3 | 14.5 | 1.17 | 40.5 | 1.20 | 6.9 | -2.5 |
| 1000 | 43.1 | 14.0 | 1.25 | 40.3 | 1.28 | 6.9 | -2.7 |
| 1025 | 43.1 | 13.9 | 1.26 | 40.3 | 1.30 | 7.0 | -3.0 |
| 1040 | 43.1 | 13.9 | 1.27 | 40.3 | 1.31 | 7.1 | -2.8 |
| 1050 | 43.0 | 13.9 | 1.27 | 40.2 | 1.31 | 6.9 | -3.3 |
| 1700 | 42.9 | 13.6 | 1.30 | 40.2 | 1.34 | 6.8 | -3.1 |
| 1750 | 42.8 | 13.7 | 1.33 | 40.1 | 1.37 | 6.8 | -3.0 |
| 1800 | 42.8 | 13.6 | 1.36 | 40.0 | 1.40 | 7.0 | -2.9 |
| 1810 | 42.8 | 13.6 | 1.37 | 40.0 | 1.40 | 7.0 | -2.1 |
| 1825 | 42.8 | 13.6 | 1.38 | 40.0 | 1.40 | 7.0 | -1.4 |
| 1850 | 42.7 | 13.5 | 1.39 | 40.0 | 1.40 | 6.8 | -0.7 |
| 1900 | 42.6 | 13.4 | 1.42 | 40.0 | 1.40 | 6.5 | 1.4 |
| 1950 | 42.5 | 13.4 | 1.45 | 40.0 | 1.40 | 6.3 | 3.6 |
| 2000 | 42.5 | 13.4 | 1.49 | 40.0 | 1.40 | 6.3 | 6.4 |
| 2050 | 42.4 | 13.3 | 1.52 | 39.9 | 1.44 | 6.2 | 5.2 |
| 2100 | 42.3 | 13.3 | 1.55 | 39.8 | 1.49 | 6.2 | 4.1 |
| 2150 | 42.3 | 13.3 | 1.59 | 39.7 | 1.53 | 6.5 | 3.7 |
| 2200 | 42.2 | 13.3 | 1.62 | 39.6 | 1.58 | 6.4 | 2.7 |
| 2250 | 42.1 | 13.3 | 1.66 | 39.6 | 1.62 | 6.4 | 2.3 |
| 2300 | 42.0 | 13.3 | 1.70 | 39.5 | 1.67 | 6.4 | 2.0 |
| 2350 | 42.0 | 13.3 | 1.74 | 39.4 | 1.71 | 6.7 | 1.7 |
| 2400 | 41.9 | 13.3 | 1.77 | 39.3 | 1.76 | 6.6 | 0.8 |
| 2450 | 41.8 | 13.3 | 1.81 | 39.2 | 1.80 | 6.6 | 0.6 |
| 2500 | 41.8 | 13.3 | 1.85 | 39.1 | 1.85 | 6.8 | -0.2 |
| 2550 | 41.7 | 13.3 | 1.89 | 39.1 | 1.91 | 6.7 | -1.0 |
| 2600 | 41.6 | 13.4 | 1.93 | 39.0 | 1.96 | 6.6 | -1.7 |

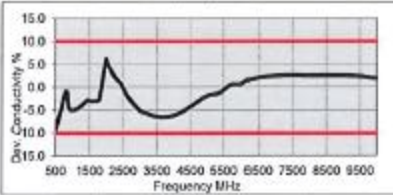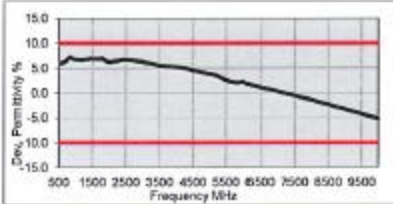

| | | | | | | | |
|-------|------|------|-------|------|-------|------|------|
| 3500 | 40.0 | 14.0 | 2.72 | 37.9 | 2.81 | 5.5 | -6.5 |
| 3750 | 39.7 | 14.1 | 2.91 | 37.7 | 3.12 | 5.4 | -6.6 |
| 5000 | 37.2 | 15.6 | 4.58 | 36.0 | 4.66 | 3.5 | -1.6 |
| 5250 | 37.1 | 15.9 | 4.63 | 35.9 | 4.71 | 3.3 | -1.6 |
| 5300 | 37.0 | 15.9 | 4.69 | 35.9 | 4.76 | 3.2 | -1.5 |
| 5500 | 36.6 | 16.1 | 4.93 | 35.6 | 4.86 | 2.6 | -0.7 |
| 5600 | 36.4 | 16.2 | 5.05 | 35.5 | 5.87 | 2.3 | -0.1 |
| 5700 | 36.2 | 16.4 | 5.19 | 35.4 | 5.17 | 2.1 | 0.4 |
| 5800 | 36.0 | 16.4 | 5.30 | 35.3 | 5.27 | 2.0 | 0.6 |
| 6000 | 35.8 | 16.5 | 5.51 | 35.1 | 5.48 | 2.2 | 0.6 |
| 6500 | 34.8 | 17.1 | 6.20 | 34.5 | 6.87 | 1.1 | 2.1 |
| 7000 | 34.0 | 17.5 | 6.81 | 33.9 | 6.95 | 0.3 | 2.5 |
| 7500 | 33.1 | 17.8 | 7.43 | 33.3 | 7.24 | -0.6 | 2.6 |
| 8000 | 32.2 | 18.1 | 8.04 | 32.7 | 7.84 | -1.5 | 2.6 |
| 8500 | 31.4 | 18.3 | 8.67 | 32.1 | 8.45 | -2.4 | 2.6 |
| 9000 | 30.5 | 18.6 | 9.31 | 31.5 | 9.06 | -3.3 | 2.6 |
| 9500 | 29.6 | 18.8 | 9.94 | 31.0 | 9.71 | -4.3 | 2.3 |
| 10000 | 28.8 | 19.0 | 10.58 | 30.4 | 10.36 | -5.2 | 1.9 |

Figure D-2
600 – 10000 MHz Head Tissue Equivalent Matter

| | | |
|--------------------|--------------------|-----------------------------------|
| FCC ID: BCG-A3326 | RF EXPOSURE REPORT | Approved by: Technical Manager |
| DUT Type: Watch | | APPENDIX D: Page 3 of 4 |

Measurement Certificate / Material Test

| | |
|--------------|---|
| Item Name | Head Tissue Simulating Liquid (HBBL4-250V3) |
| Product No. | SL AAH 005 AD (Batch: 250129-1) |
| Manufacturer | SPEAG |

Measurement Method
 TSL dielectric parameters measured using calibrated DAK probe.

Setup Validation
 Validation results were within $\pm 2.5\%$ towards the target values of Methanol.

Target Parameters
 Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.

Test Condition
 Ambient: Environment temperature (22 \pm 3)^oC and humidity < 70%
 TSL Temperature: 22^oC
 Test Date: 5-Feb-25
 Operator: CL

Additional Information
 TSL Density: 1.042 g/cm³
 TSL Heat-capacity: 3.574 kJ/(kg^oK)

| f [MHz] | Measured | | | Target | | Diff. to Target [%] | |
|---------|-------------|--------------|----------------|-----------------|---------------|-----------------------|---------------------|
| | ϵ' | ϵ'' | σ_{rms} | ϵ_{ps} | σ_{ps} | $\Delta\epsilon_{ps}$ | $\Delta\sigma_{ps}$ |
| 5 | 53.4 | 2602.47 | 0.72 | 55.5 | 0.75 | -3.7 | -4.0 |
| 10 | 53.3 | 1901.69 | 0.72 | 55.5 | 0.75 | -3.9 | -5.0 |
| 15 | 53.3 | 868.51 | 0.72 | 55.3 | 0.75 | -3.7 | -4.0 |
| 20 | 53.3 | 651.94 | 0.73 | 55.1 | 0.75 | -3.3 | -2.7 |
| 25 | 53.3 | 522.00 | 0.73 | 55.0 | 0.75 | -3.1 | -2.7 |
| 30 | 53.3 | 435.45 | 0.73 | 55.0 | 0.75 | -3.1 | -2.7 |
| 35 | 53.2 | 373.64 | 0.73 | 54.9 | 0.75 | -3.1 | -2.7 |
| 40 | 53.2 | 327.33 | 0.73 | 54.8 | 0.75 | -2.9 | -2.7 |
| 45 | 53.1 | 291.35 | 0.73 | 54.7 | 0.75 | -2.9 | -2.7 |
| 50 | 53.0 | 262.60 | 0.73 | 54.6 | 0.75 | -2.8 | -2.7 |
| 55 | 52.9 | 239.10 | 0.73 | 54.4 | 0.75 | -2.8 | -2.8 |
| 60 | 52.8 | 219.54 | 0.73 | 54.3 | 0.75 | -2.8 | -2.9 |
| 65 | 52.7 | 203.02 | 0.73 | 54.2 | 0.75 | -2.8 | -2.9 |
| 70 | 52.6 | 188.87 | 0.74 | 54.1 | 0.75 | -2.8 | -1.6 |
| 75 | 52.5 | 176.62 | 0.74 | 54.0 | 0.75 | -2.8 | -1.7 |
| 80 | 52.4 | 165.91 | 0.74 | 53.9 | 0.75 | -2.7 | -1.7 |
| 85 | 52.3 | 156.47 | 0.74 | 53.8 | 0.75 | -2.7 | -1.8 |
| 90 | 52.2 | 148.09 | 0.74 | 53.7 | 0.75 | -2.7 | -1.9 |
| 95 | 52.1 | 140.60 | 0.74 | 53.5 | 0.75 | -2.7 | -1.9 |
| 100 | 52.0 | 133.87 | 0.74 | 53.4 | 0.75 | -2.7 | -2.0 |
| 105 | 51.9 | 127.78 | 0.75 | 53.3 | 0.76 | -2.6 | -0.7 |
| 110 | 51.8 | 122.26 | 0.75 | 53.2 | 0.76 | -2.6 | -0.7 |
| 115 | 51.7 | 117.22 | 0.75 | 53.1 | 0.76 | -2.6 | -0.8 |
| 120 | 51.6 | 112.61 | 0.75 | 53.0 | 0.76 | -2.6 | -0.9 |
| 125 | 51.5 | 108.37 | 0.75 | 52.9 | 0.76 | -2.6 | -0.9 |
| 130 | 51.4 | 104.46 | 0.76 | 52.8 | 0.76 | -2.6 | 0.4 |
| 135 | 51.3 | 100.85 | 0.76 | 52.6 | 0.76 | -2.5 | 0.3 |
| 140 | 51.2 | 97.49 | 0.76 | 52.5 | 0.76 | -2.5 | 0.2 |
| 145 | 51.1 | 94.37 | 0.76 | 52.4 | 0.76 | -2.5 | 0.2 |
| 150 | 51.0 | 91.46 | 0.76 | 52.3 | 0.76 | -2.5 | 0.1 |
| 155 | 50.9 | 88.74 | 0.77 | 52.1 | 0.76 | -2.2 | 1.0 |
| 160 | 50.8 | 86.20 | 0.77 | 51.8 | 0.77 | -2.0 | 0.5 |
| 165 | 50.7 | 83.81 | 0.77 | 51.6 | 0.77 | -1.7 | 0.0 |
| 170 | 50.6 | 81.56 | 0.77 | 51.4 | 0.77 | -1.5 | -0.5 |
| 175 | 50.5 | 79.45 | 0.77 | 51.1 | 0.78 | -1.2 | -0.9 |
| 180 | 50.4 | 77.45 | 0.78 | 50.9 | 0.78 | -1.0 | -0.1 |
| 185 | 50.3 | 75.56 | 0.78 | 50.7 | 0.78 | -0.7 | -0.6 |
| 190 | 50.3 | 73.78 | 0.78 | 50.4 | 0.79 | -0.3 | -1.0 |
| 195 | 50.2 | 72.09 | 0.78 | 50.2 | 0.79 | 0.0 | -1.5 |
| 200 | 50.1 | 70.48 | 0.78 | 50.0 | 0.80 | 0.3 | -2.0 |
| 205 | 50.0 | 68.96 | 0.79 | 49.7 | 0.80 | 0.5 | -1.2 |
| 210 | 49.9 | 67.51 | 0.79 | 49.5 | 0.80 | 0.8 | -1.6 |
| 215 | 49.8 | 66.13 | 0.79 | 49.3 | 0.81 | 1.1 | -2.1 |
| 220 | 49.8 | 64.81 | 0.79 | 49.0 | 0.81 | 1.6 | -2.5 |
| 225 | 49.7 | 63.56 | 0.80 | 48.8 | 0.81 | 1.8 | -1.7 |
| 230 | 49.6 | 62.35 | 0.80 | 48.6 | 0.82 | 2.1 | -2.1 |
| 235 | 49.5 | 61.21 | 0.80 | 48.3 | 0.82 | 2.4 | -2.6 |
| 240 | 49.4 | 60.10 | 0.80 | 48.1 | 0.82 | 2.7 | -3.0 |
| 245 | 49.4 | 59.05 | 0.80 | 47.9 | 0.83 | 3.2 | -3.4 |
| 250 | 49.3 | 58.04 | 0.81 | 47.6 | 0.83 | 3.5 | -2.7 |





Figure D-3
5– 250 MHz Head Tissue Equivalent Matter

| | | |
|--------------------|--------------------|-----------------------------------|
| FCC ID: BCG-A3326 | RF EXPOSURE REPORT | Approved by: Technical Manager |
| DUT Type: Watch | | APPENDIX D: Page 4 of 4 |