



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 8**

CERTIFICATION TEST REPORT

FOR

QUAD-BAND RADIO WITH WLAN AND BT RADIO

MODEL NUMBER: A1456, A1532

**FCC ID: BCG-E2644A
IC ID: 579C-E2644A, 579C-E2644B**

REPORT NUMBER: 13U14987-9

ISSUE DATE: JULY 22, 2013

Prepared for
**APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.**

Prepared by
**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
	07/22/13	Initial Issue	T. Chan

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. MEASURING INSTRUMENT CALIBRATION	5
4.2. SAMPLE CALCULATION	5
4.3. MEASUREMENT UNCERTAINTY	5
5. EQUIPMENT UNDER TEST	6
5.1. DESCRIPTION OF EUT	6
5.2. MAXIMUM OUTPUT POWER	6
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	6
5.4. SOFTWARE AND FIRMWARE	6
5.5. WORST-CASE CONFIGURATION AND MODE	6
5.6. DESCRIPTION OF TEST SETUP	7
6. TEST AND MEASUREMENT EQUIPMENT	9
7. ANTENNA PORT TEST RESULTS	10
7.1. 6 dB BANDWIDTH	10
7.1. 99% BANDWIDTH	13
7.2. OUTPUT POWER	16
7.1. AVERAGE POWER	19
7.2. POWER SPECTRAL DENSITY	20
7.3. CONDUCTED SPURIOUS EMISSIONS	23
8. RADIATED TEST RESULTS	27
8.1. LIMITS AND PROCEDURE	27
8.2. TRANSMITTER ABOVE 1 GHz	28
8.3. WORST-CASE BELOW 1 GHz	38
9. AC POWER LINE CONDUCTED EMISSIONS	40
10. SETUP PHOTOS	44

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA, 95014, U.S.A.

EUT DESCRIPTION: QUAD-BAND RADIO WITH WLAN AND BT RADIO

MODEL: A1456, A1532

SERIAL NUMBER: C39HV0HPF5P5 (Conducted), C39KP005FL57 (Radiated)

DATE TESTED: MAY 02-28, 2013

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 8 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Tested By:



Thu Chan
WiSE Operations Manager
UL Verification Services Inc.

Mona Hua
WiSE Technician
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

Model A1456/A1532 is a mobile phone with multimedia functions (music, application support, and video), cellular GSM/GPRS/EGPRS/WCDMA/HSPA+/DC-HSDPA/CDMA/EVDO/LTE radio, IEEE 802.11a/b/g/n, Bluetooth and GPS radio. The rechargeable battery is not user accessible.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	BLE	11.48	14.06

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PiFA antenna, with a maximum gain of 0.21dBi.

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was Broadcom Bluetooth Version 1.4.8.7

5.5. WORST-CASE CONFIGURATION AND MODE

For Radiated Emissions below 1 GHz and Power line Conducted Emissions, the channel with the highest conducted output power was selected as worst-case scenario.

The worst-position was the EUT with highest emissions. To determine the worst-case, the EUT is a portable device that has three orientations; therefore X, Y and Z orientations have been investigated with and without AC adapter, and the worst case was found to be at Z position without AC Adapter.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List			
Description	Manufacturer	Model	Serial Number
AC adapter	Apple	A1385	NA

I/O CABLES (Conducted Setup)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Shielded	0.1m	To Spectrum Analyzer


I/O CABLES (Radiated Setup)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Jack	1	Earphone	Unshielded	0.5m	N/A


TEST SETUP

The EUT is a stand-alone device.

SETUP DIAGRAM FOR TESTS (CONDUCTED)

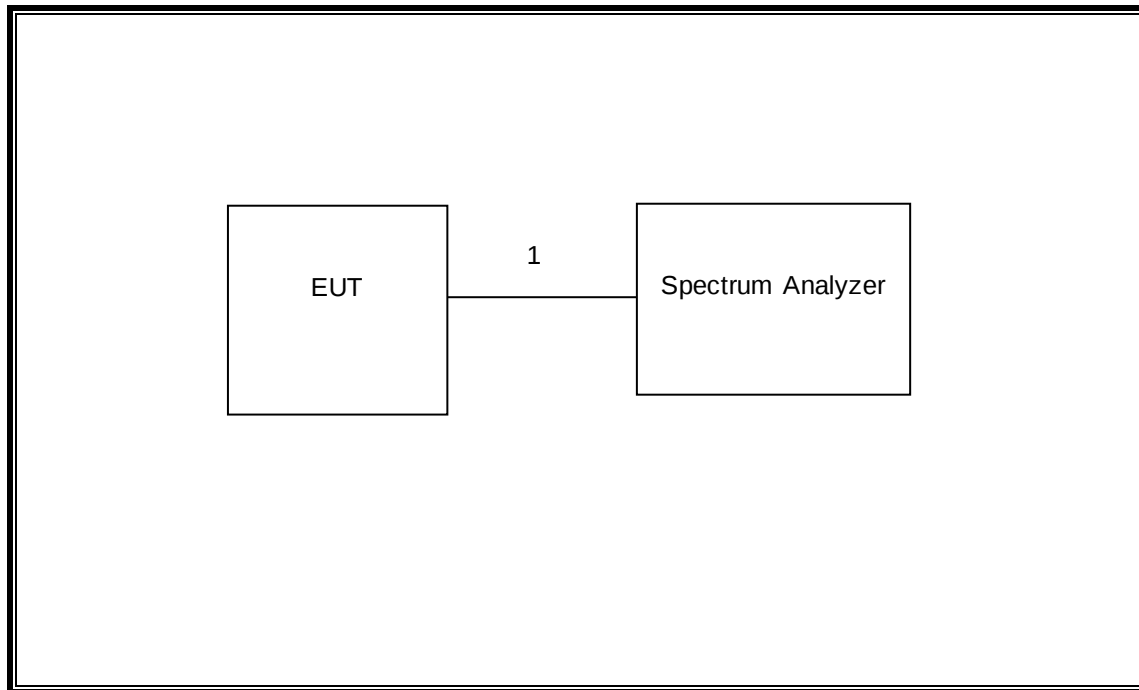

SETUP DIAGRAM FOR TESTS (RADIATED)

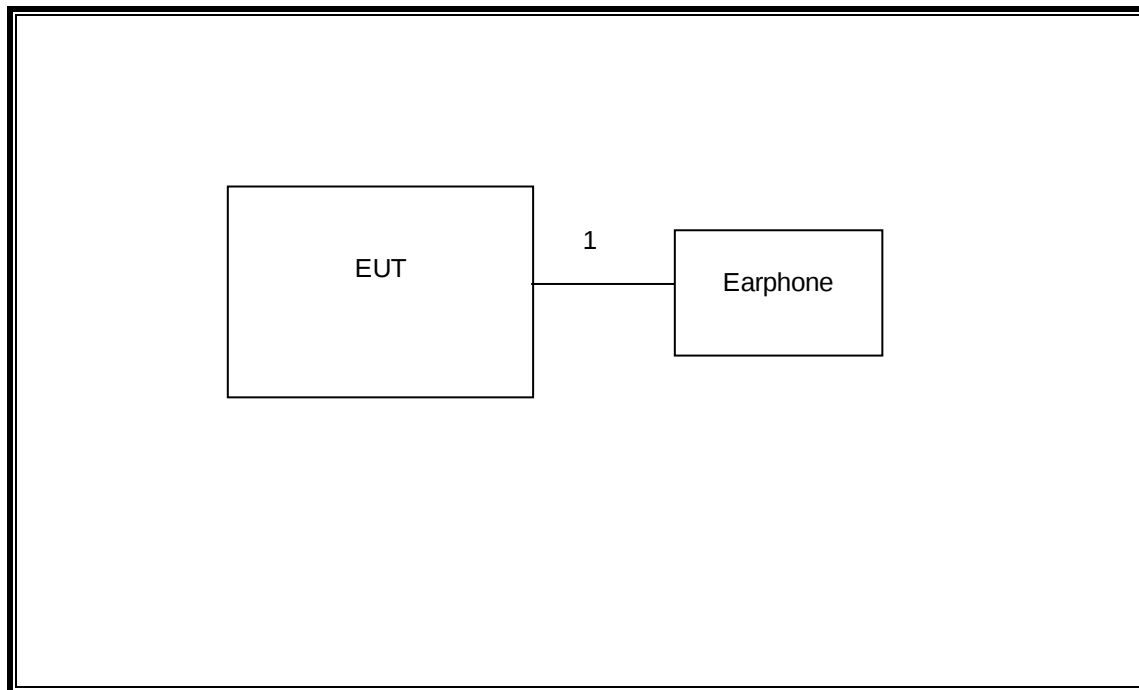

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	None	02/22/14
Antenna, Horn, 18 GHz	EMCO	3117	None	02/19/14
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00589	04/28/14
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	None	03/07/14
Preamplifier, 1300 MHz	Sonoma	310	None	11/06/13
Preamplifier, 26.5 GHz	Agilent / HP	8449B	None	03/18/14
EMI Test Receiver, 9 kHz-7 GHz	R & S	ESCI 7	1000741	07/06/13
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	04/17/14
Peak / Average Power Sensor	Agilent / HP	N1911A	None	04/05/14
Peak Power Meter	Agilent / HP	E9323A	None	04/03/14
Horn Antenna, 26.5 to 40GHz	ARA	MWH-2640/B	None	05/14/14
Preamplifier, 40 GHz	Miteq	NSP4000-SP2	C00990	08/02/13

7. ANTENNA PORT TEST RESULTS

7.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)
IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.



TEST PROCEDURE


KDB 558074 D01 v01 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247".

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (KHz)	Minimum Limit (KHz)
Low	2402	684.000	500.0
Middle	2440	683.000	500.0
High	2480	695.000	500.0

6 dB BANDWIDTH

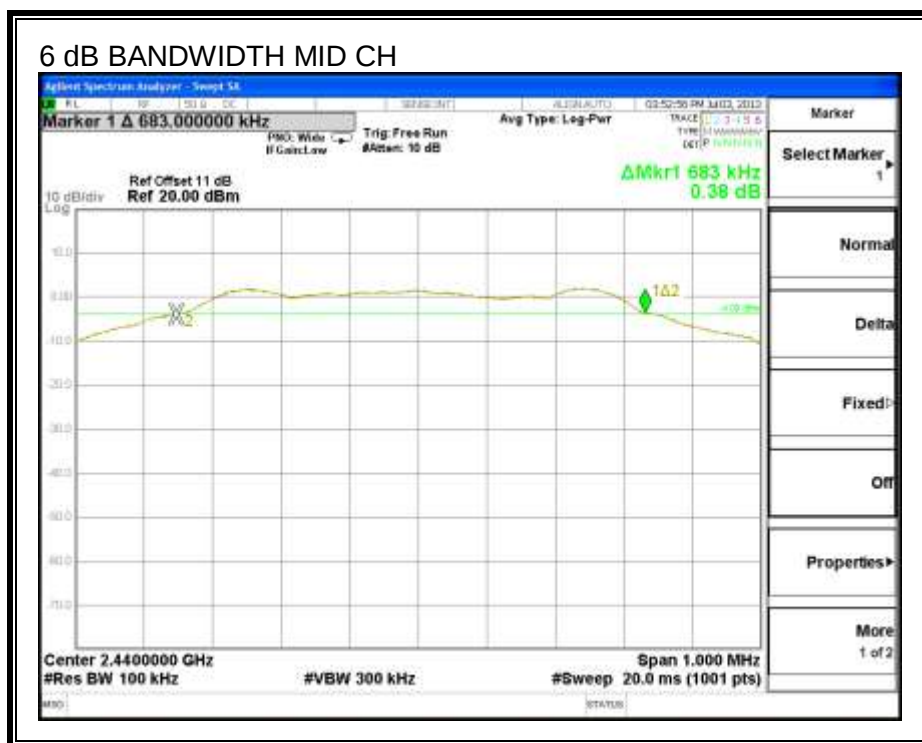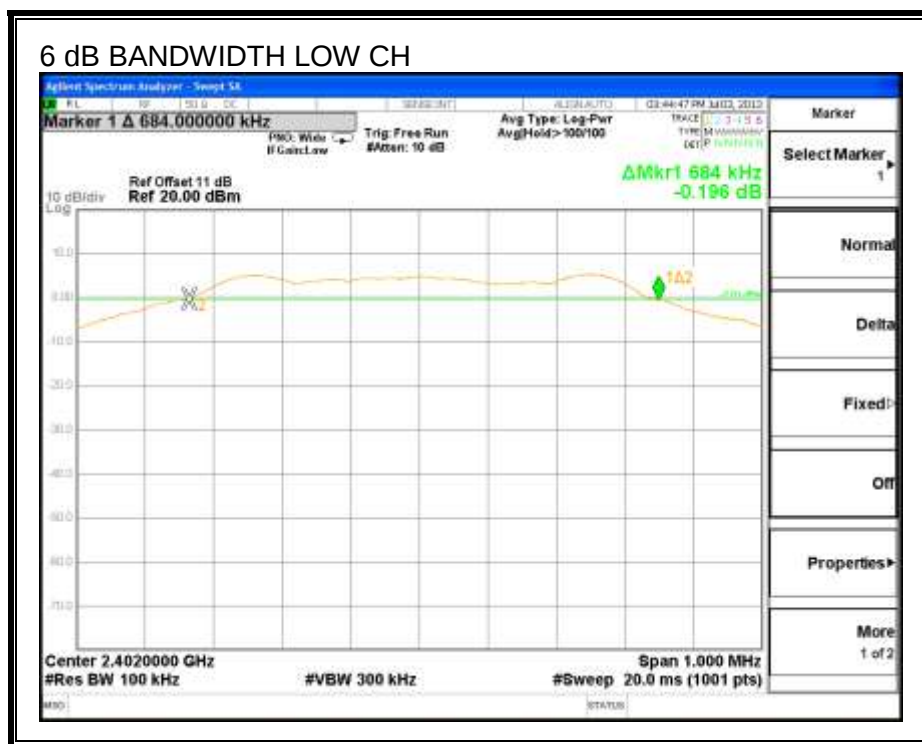

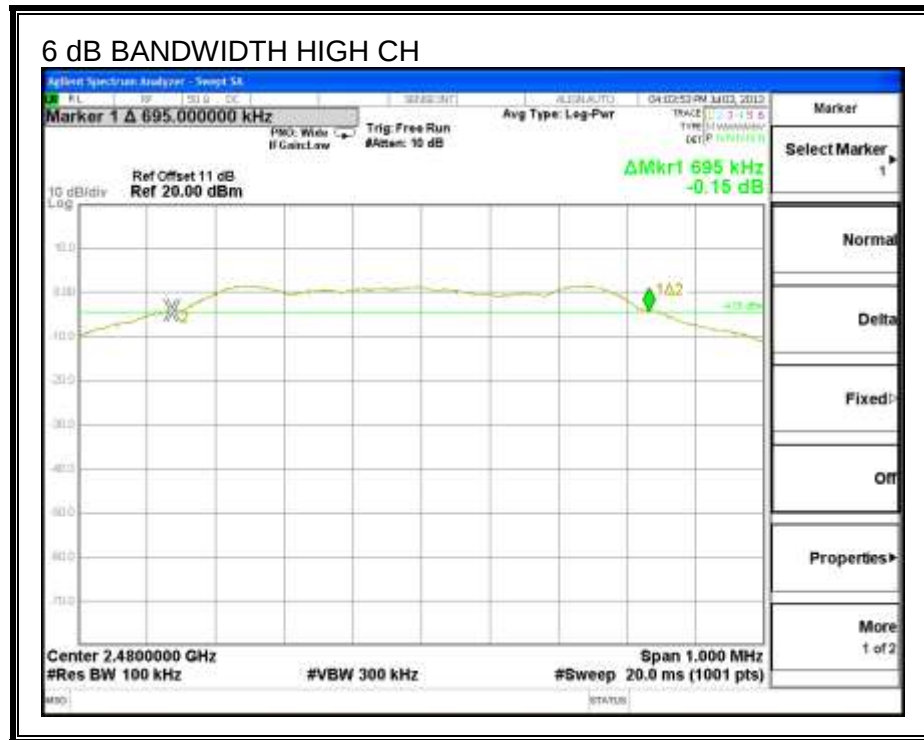

7.1. 99% BANDWIDTH

LIMIT

None; for reporting purposes only.


TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth and to 1% of the span. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.0339
Middle	2440	1.0172
High	2480	1.0560

99% BANDWIDTH

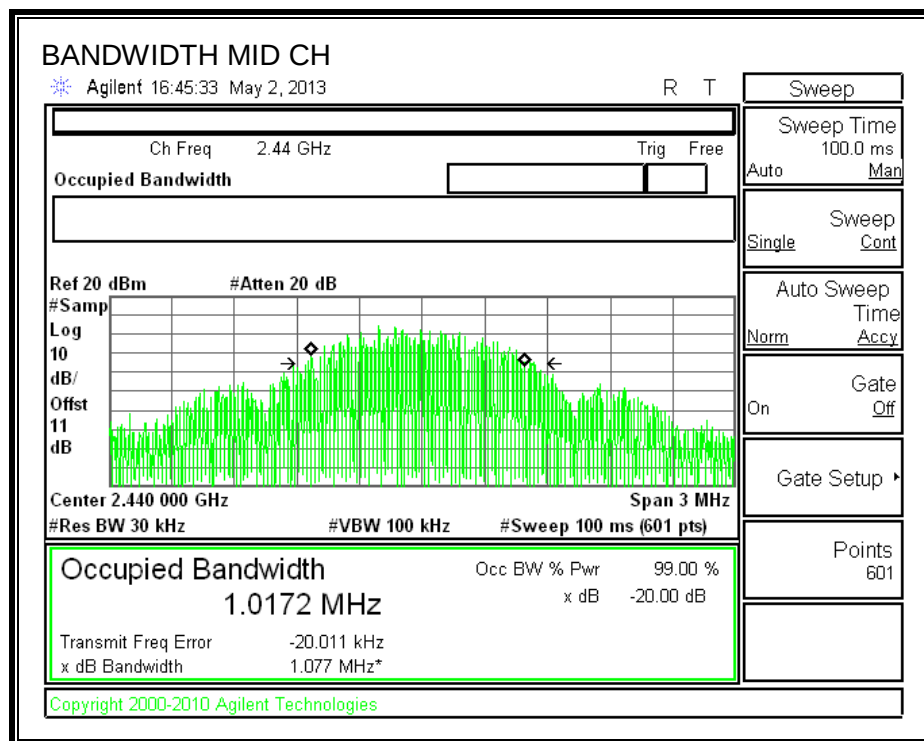

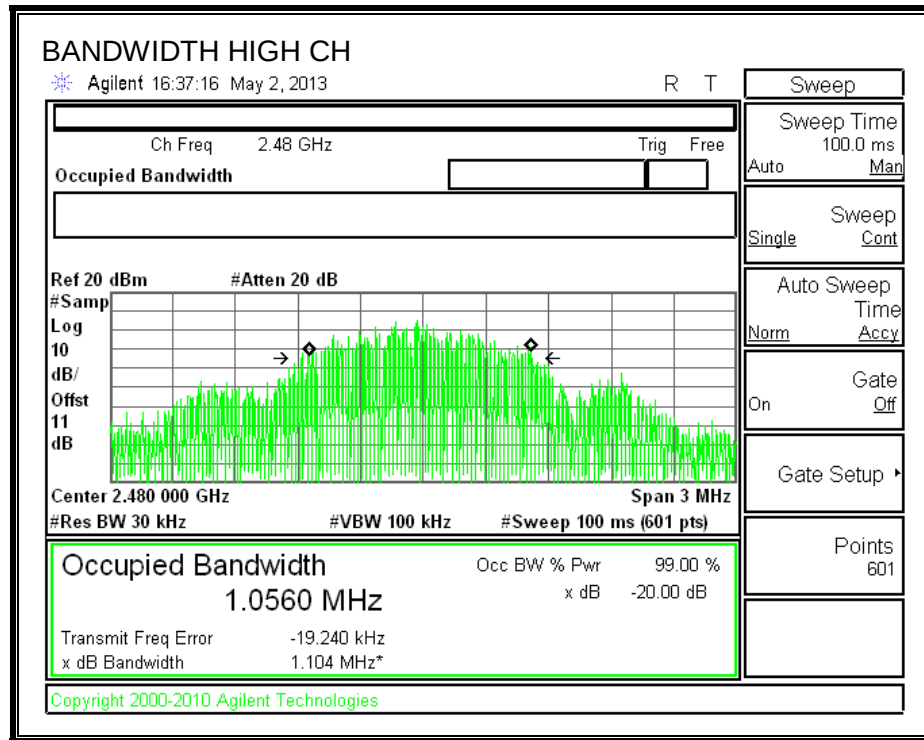

7.2. OUTPUT POWER

LIMIT

§15.247 (b) (1)



The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE

KDB 558074 D01 v01 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247".

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	9.679	30	-20.32
Middle	2440	11.480	30	-18.52
High	2480	8.730	30	-21.27

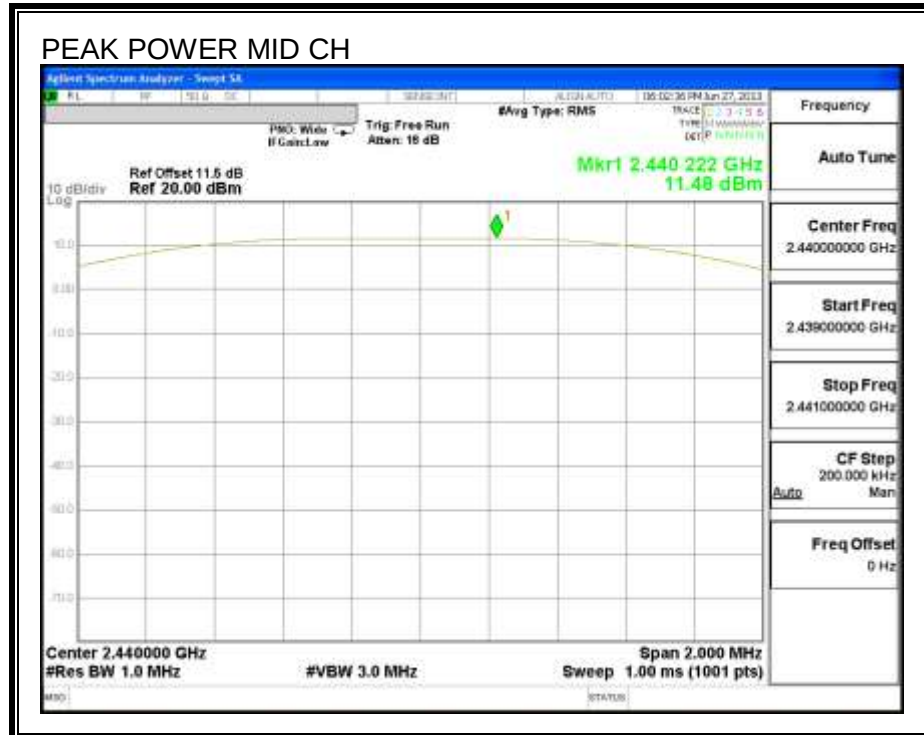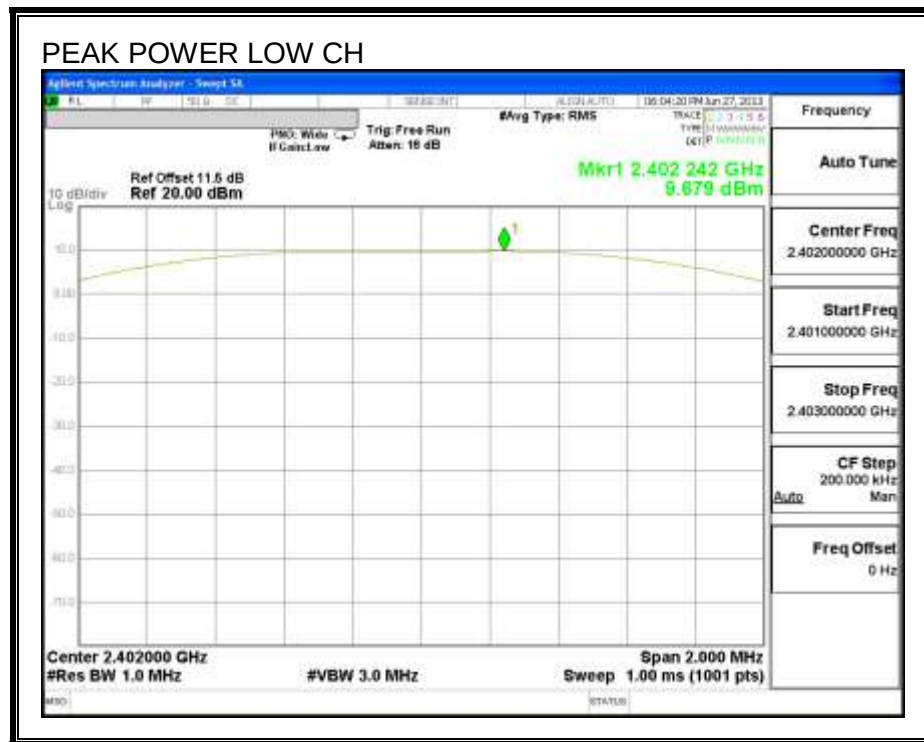

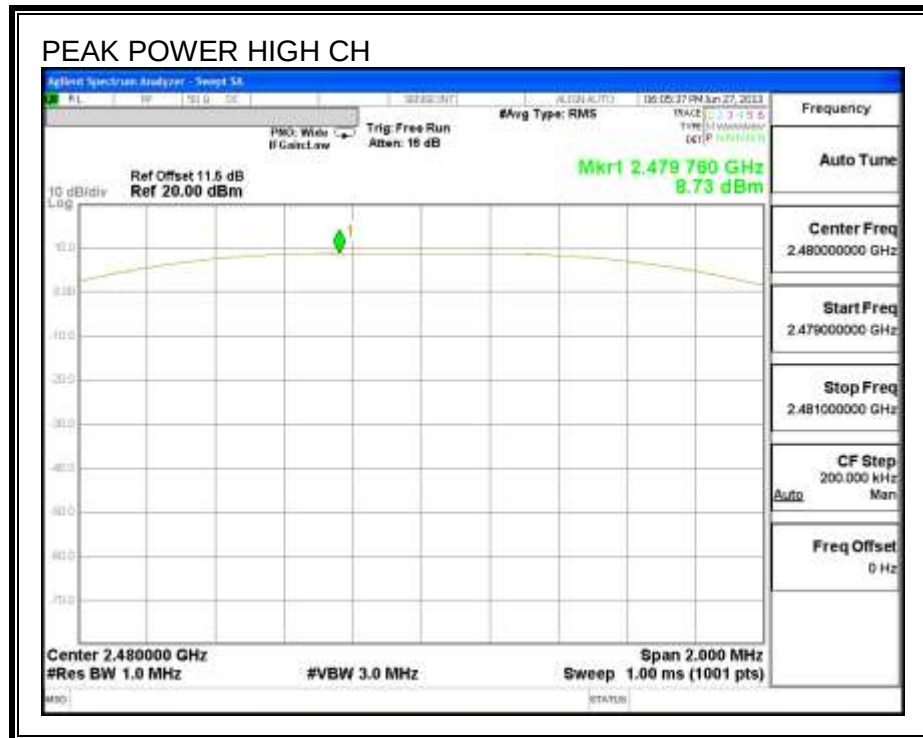

7.1. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	8.10
Middle	2440	8.82
High	2480	8.58

7.2. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.



TEST PROCEDURE


KDB 558074 D01 v01 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247".

RESULTS

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2402	-3.73	8	-11.73
Middle	2440	-3.40	8	-11.40
High	2480	-3.75	8	-11.75

POWER SPECTRAL DENSITY

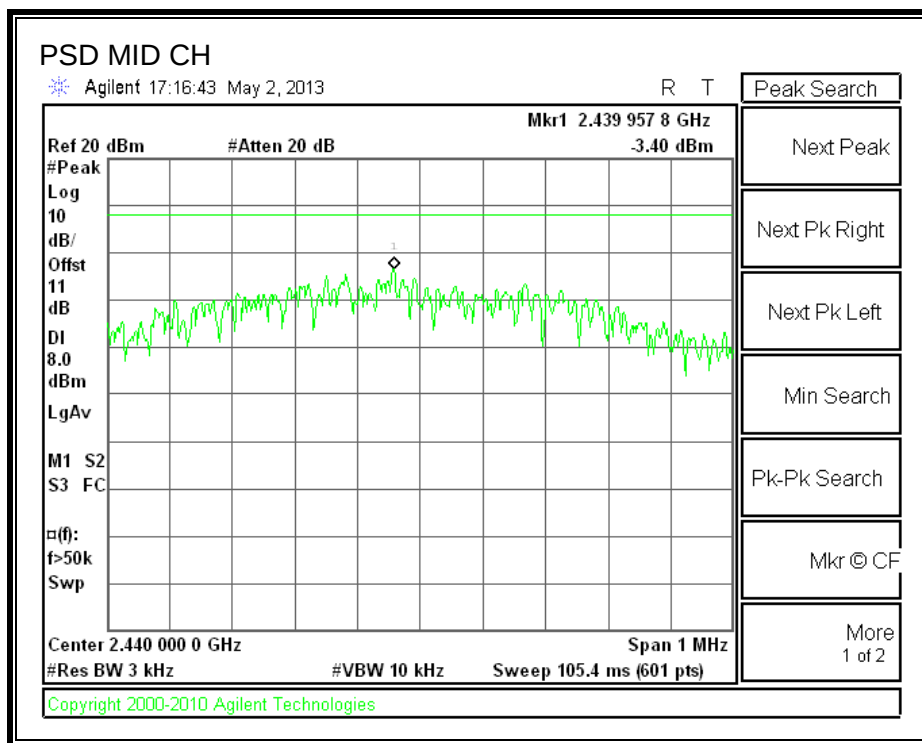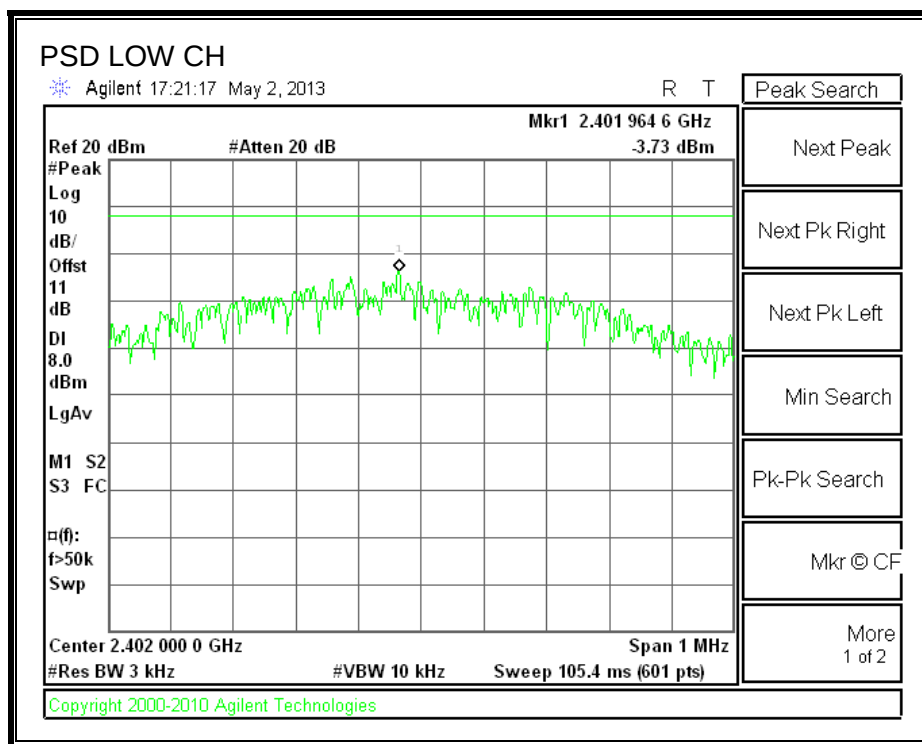

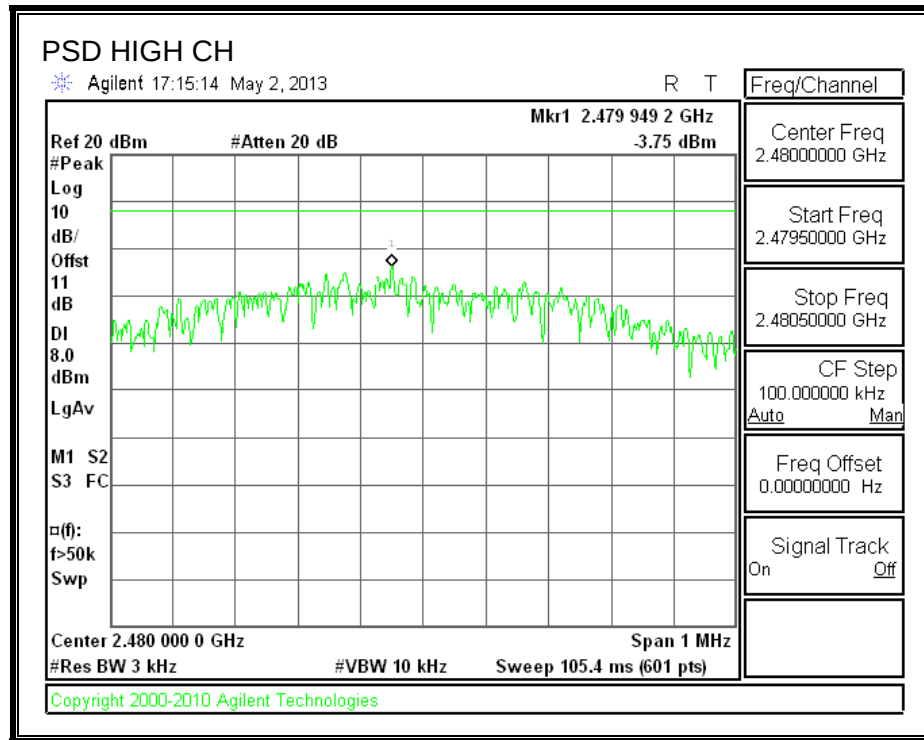

7.3. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5



Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.

TEST PROCEDURE



KDB 558074 D01 v01 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247".

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

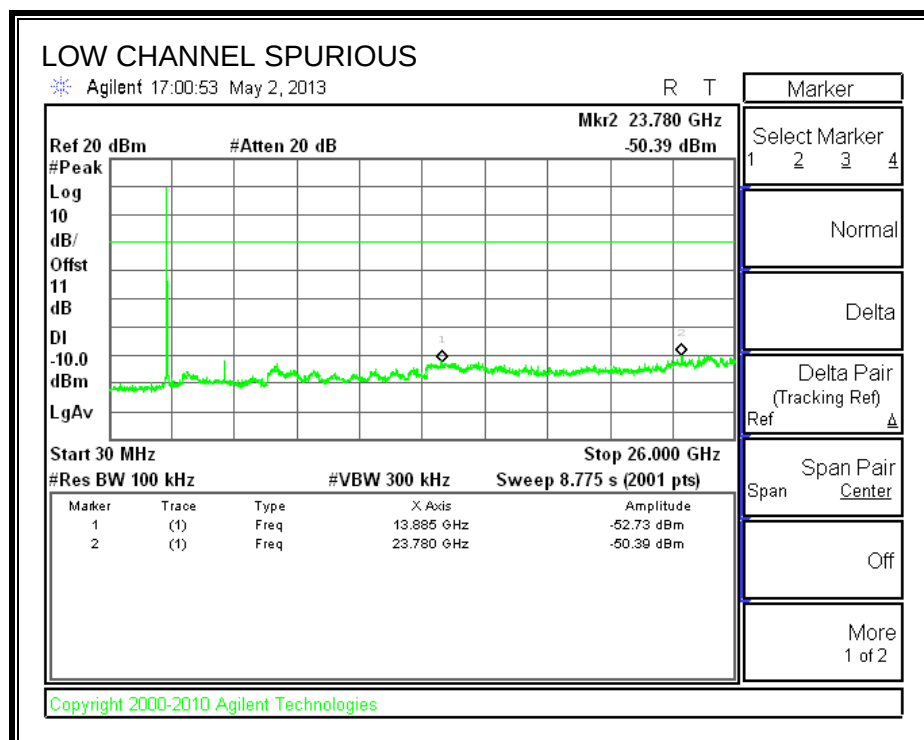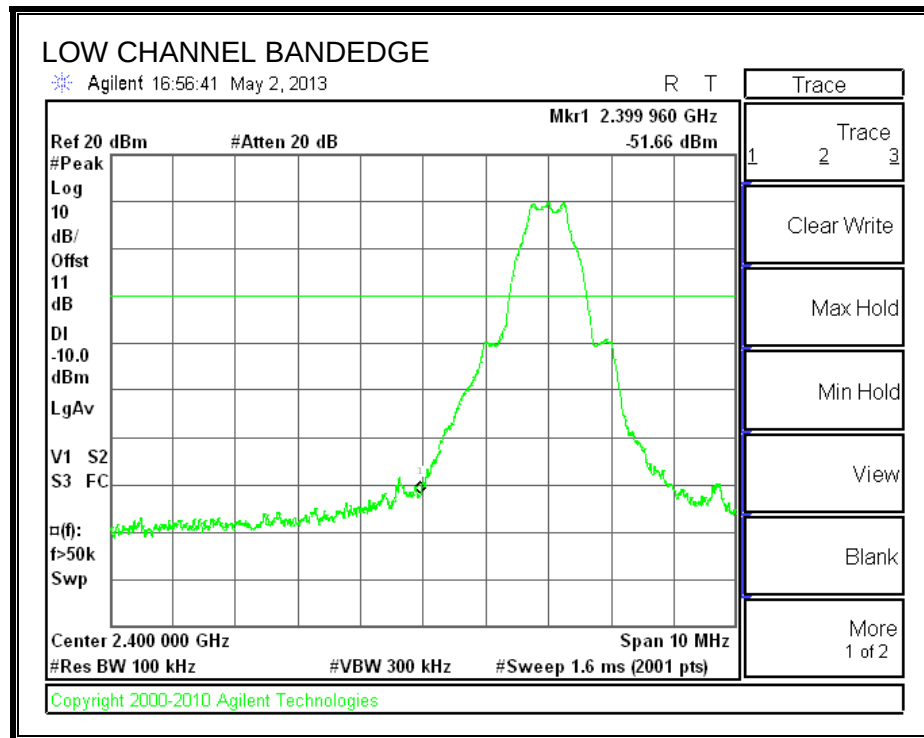

SPURIOUS EMISSIONS, MID CHANNEL

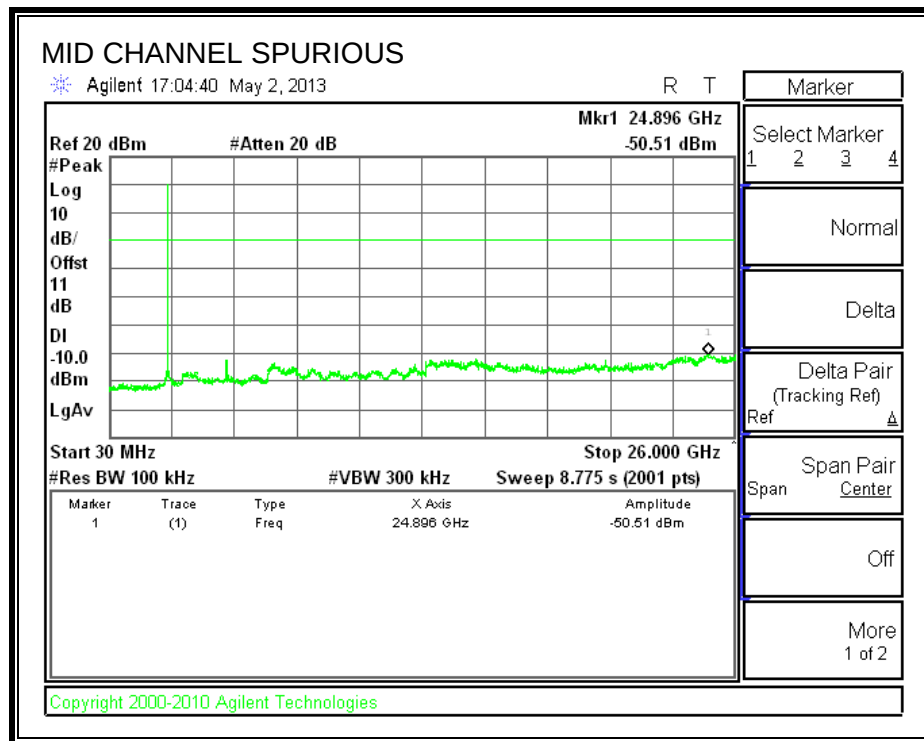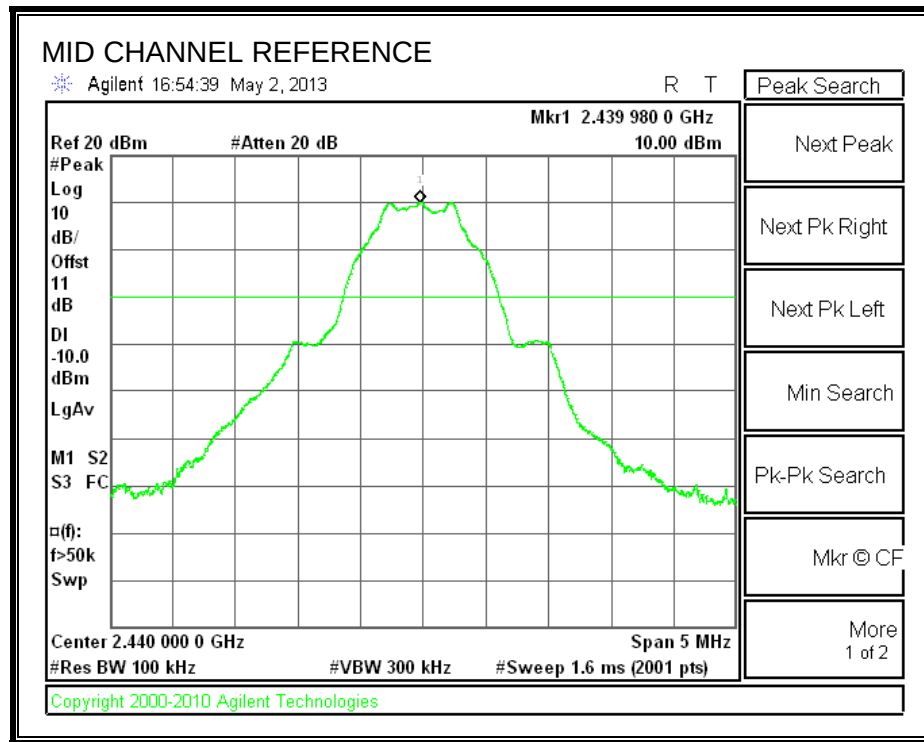

SPURIOUS EMISSIONS, HIGH CHANNEL

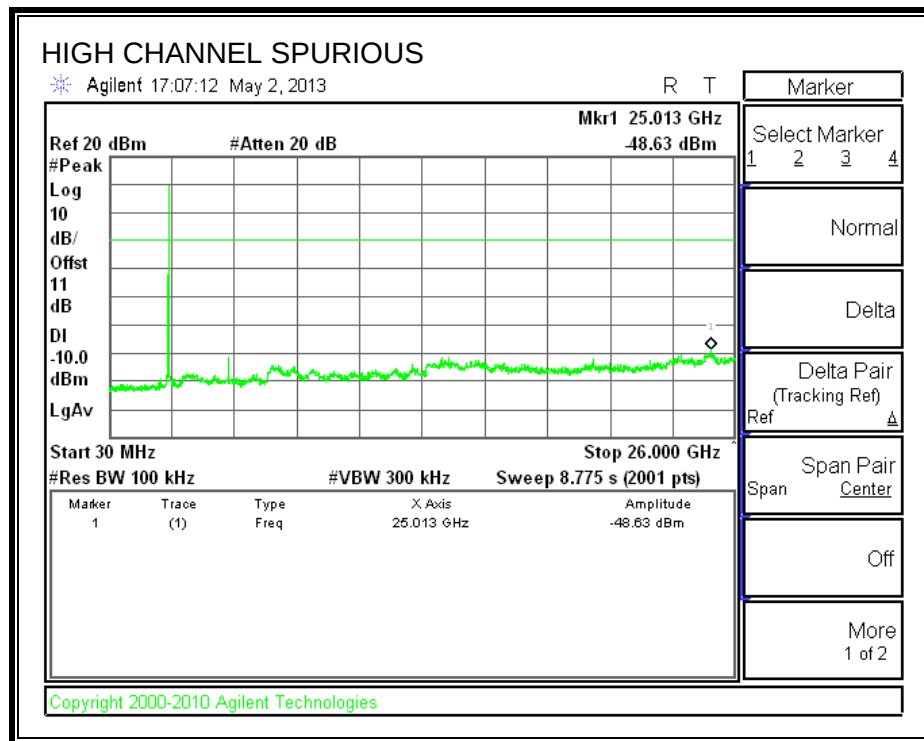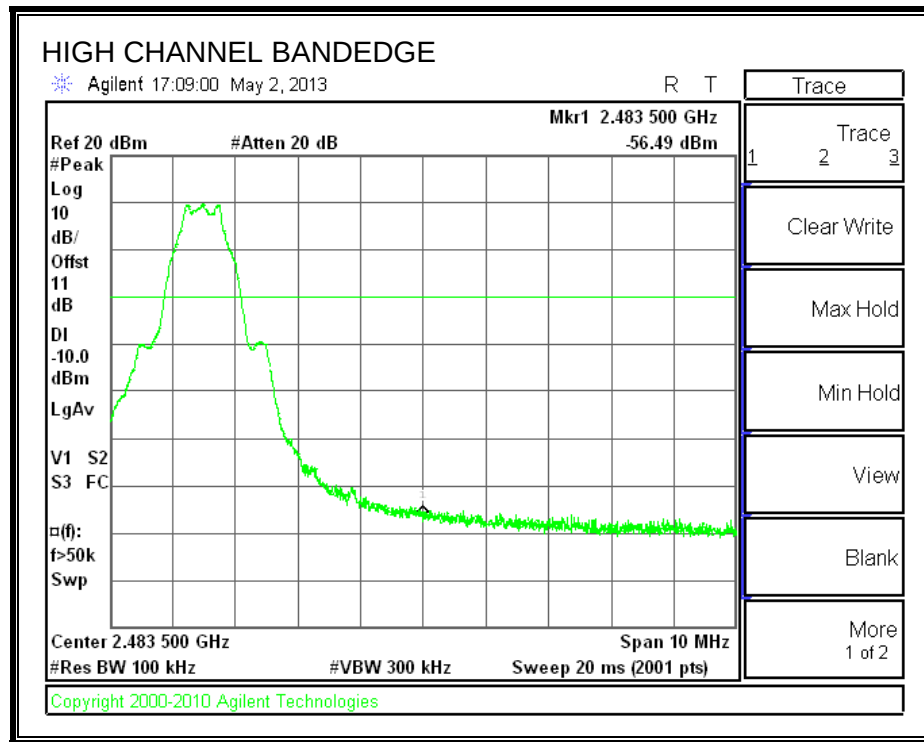

8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.



For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

For 2.4 GHz band, the spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.



The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

8.2. TRANSMITTER ABOVE 1 GHz



RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

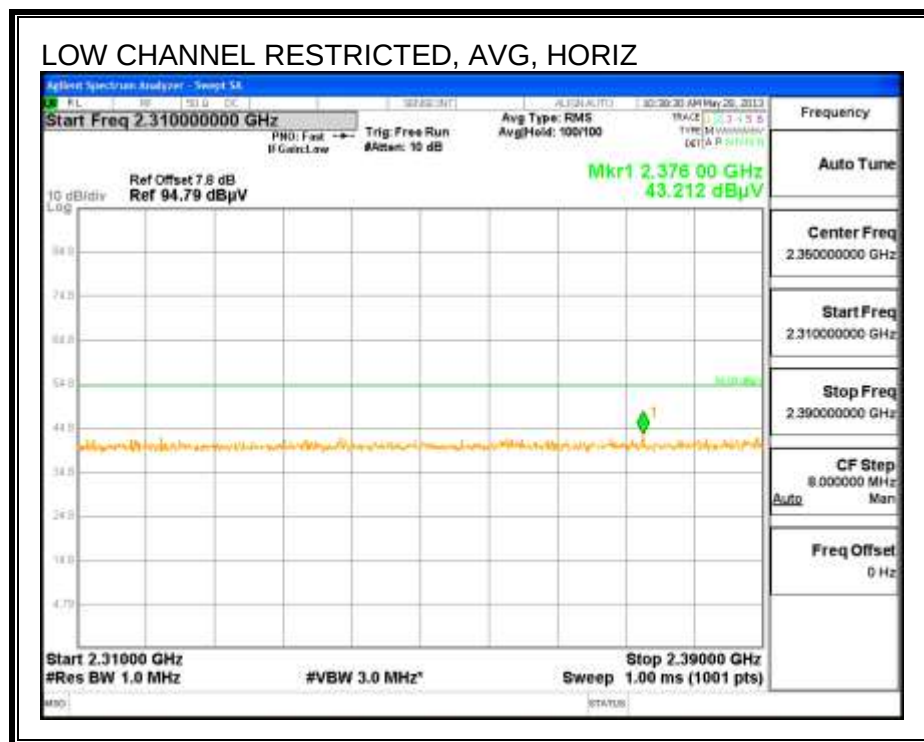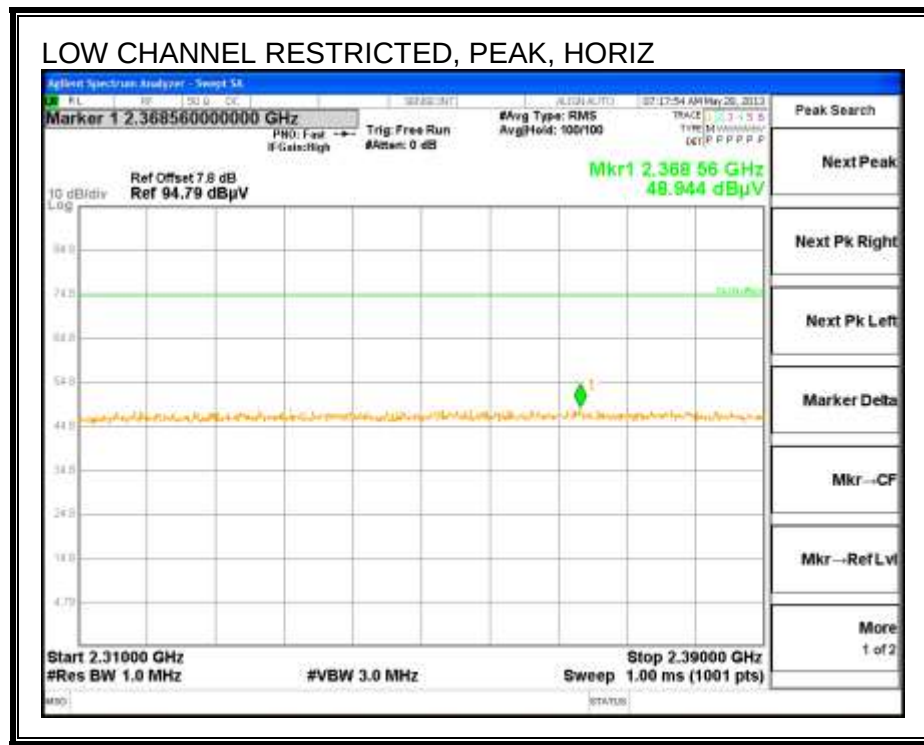



RESTRICTED BANEDGE (LOW CHANNEL, VERTICAL)

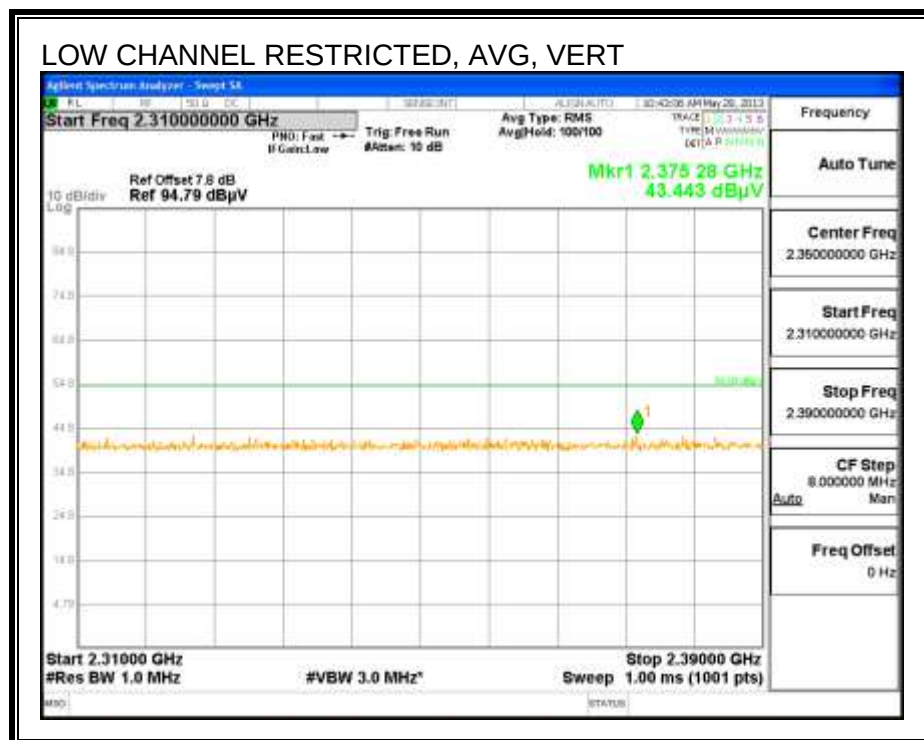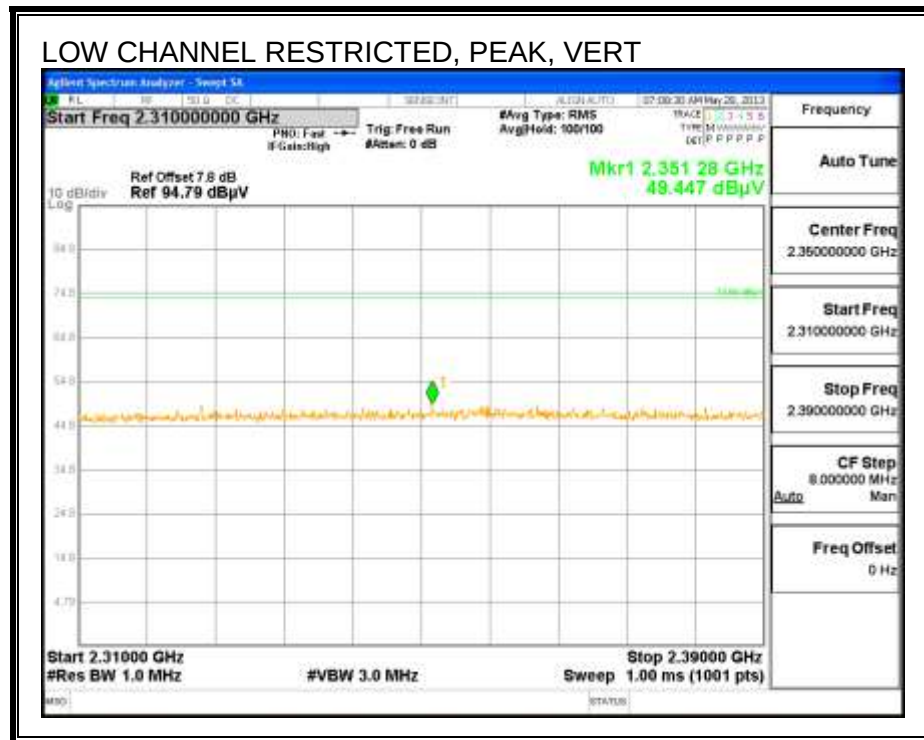


RESTRICTED BANEDGE (HIGH CHANNEL, HORIZONTAL)

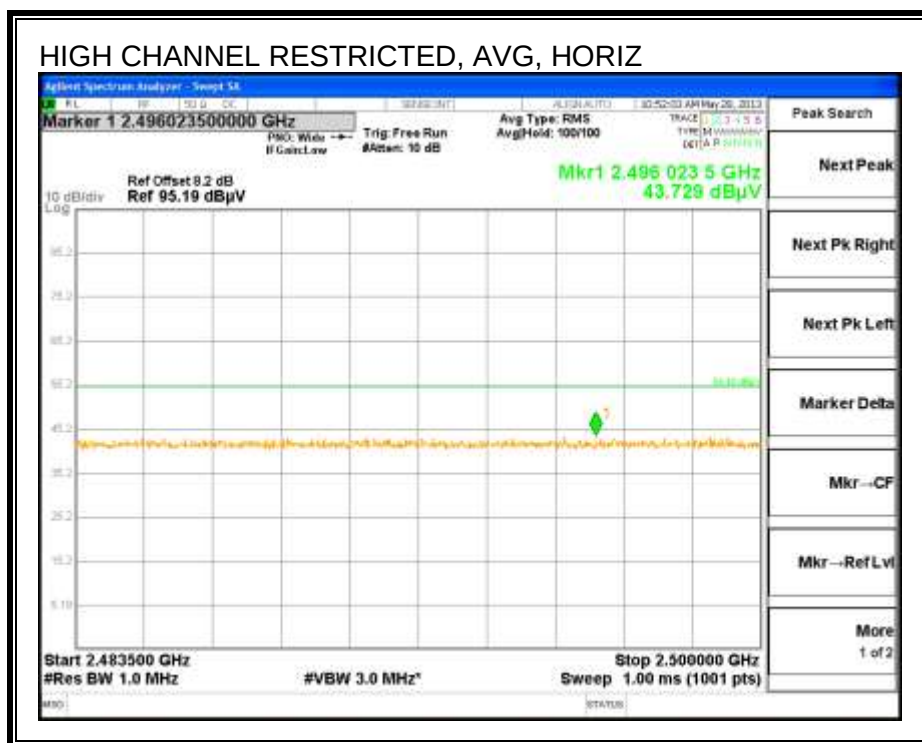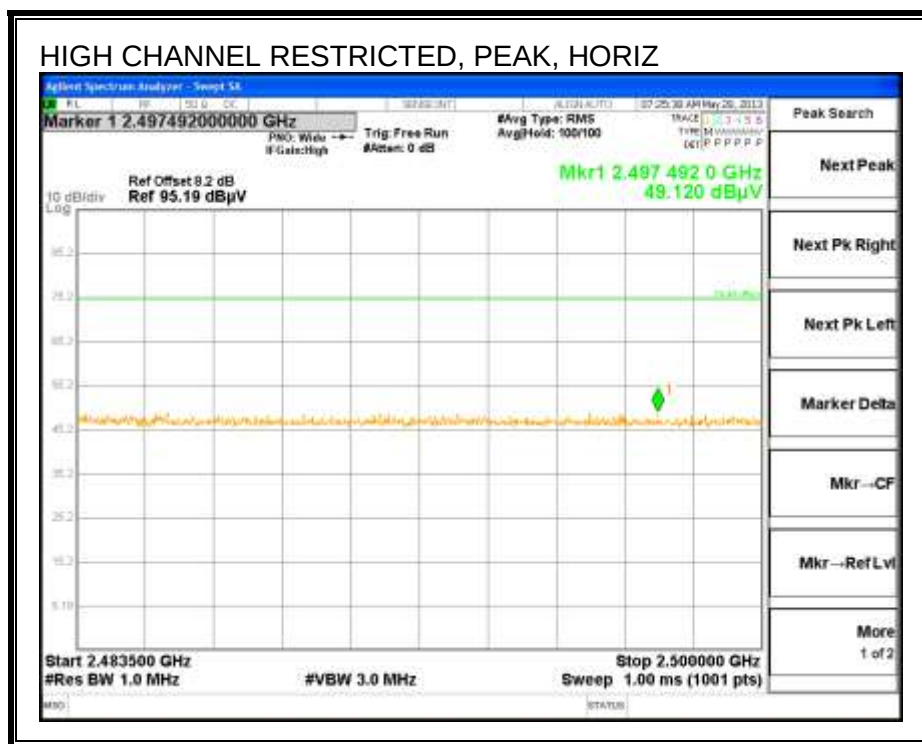


RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

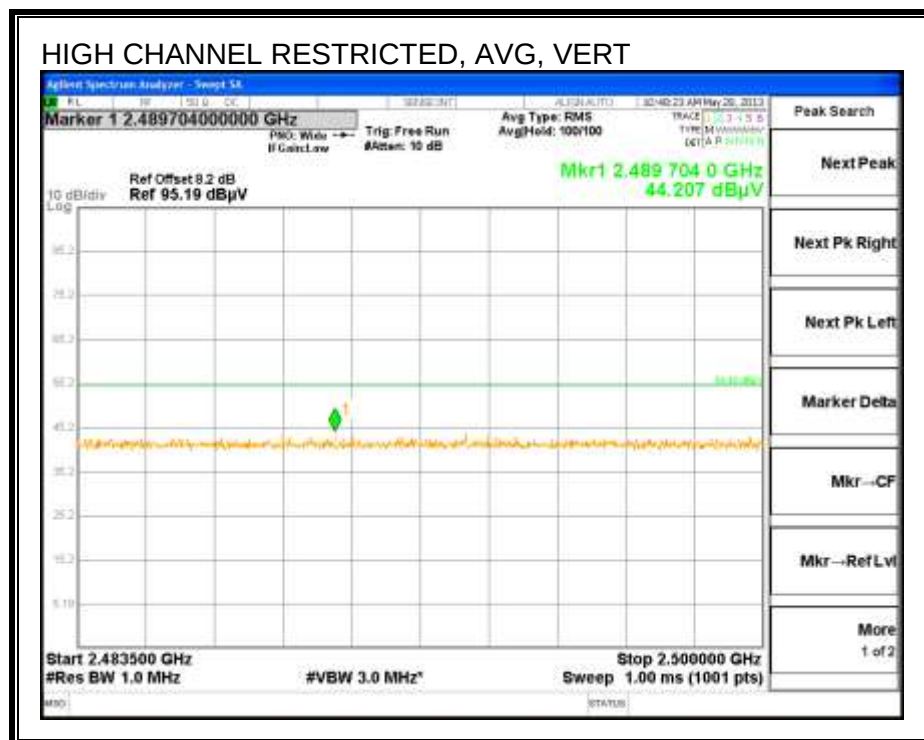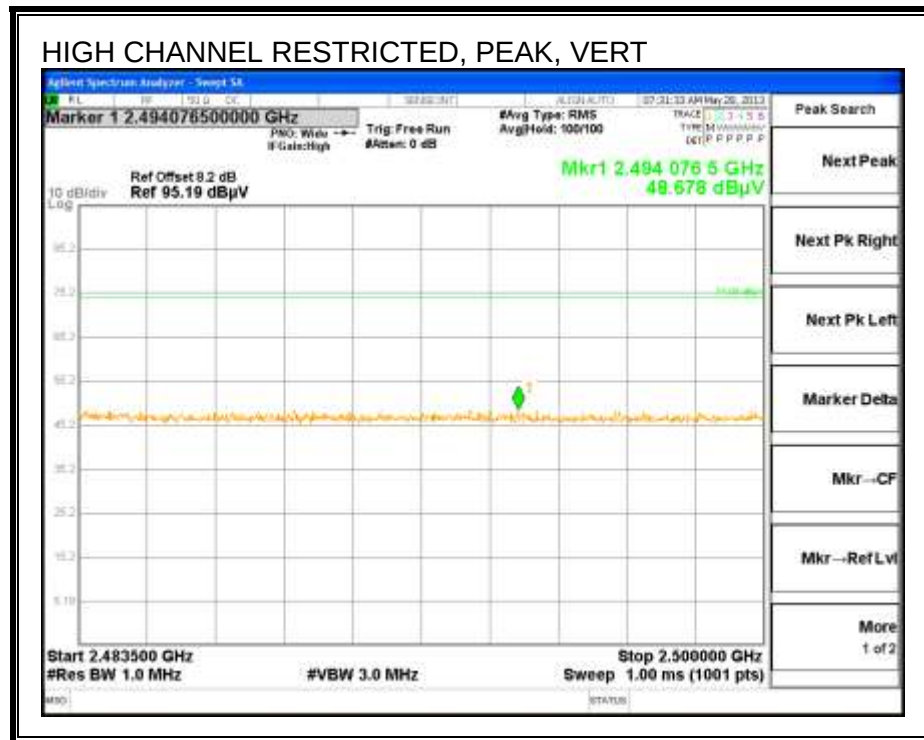

HARMONICS AND SPURIOUS EMISSIONS

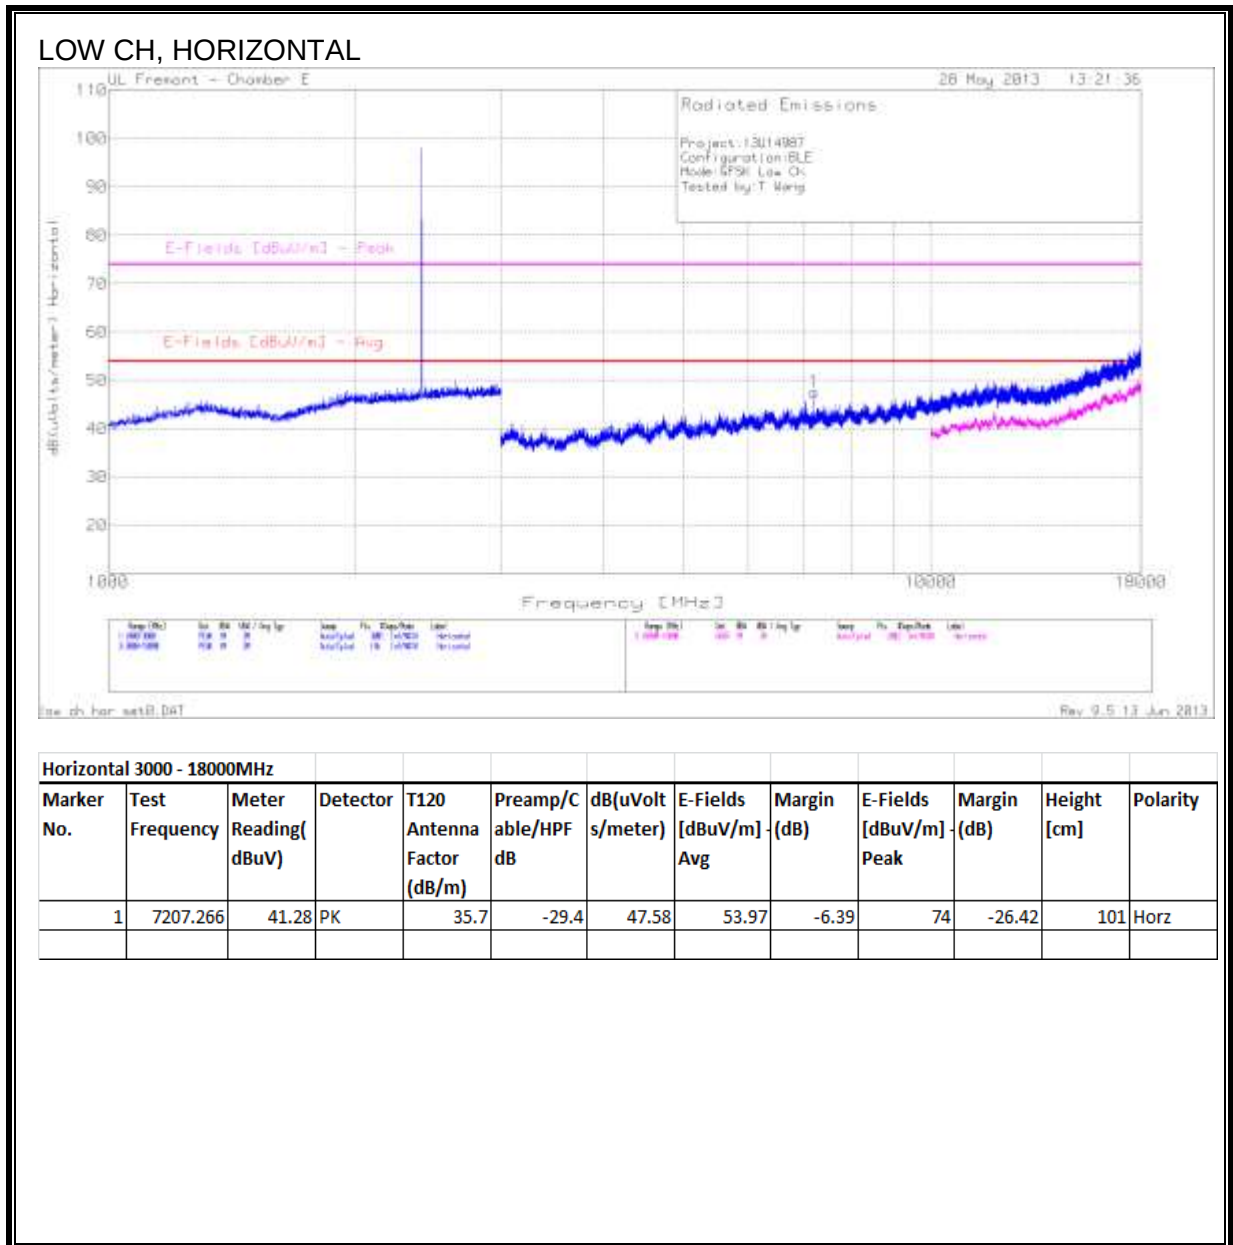


LOW CH, VERTICAL

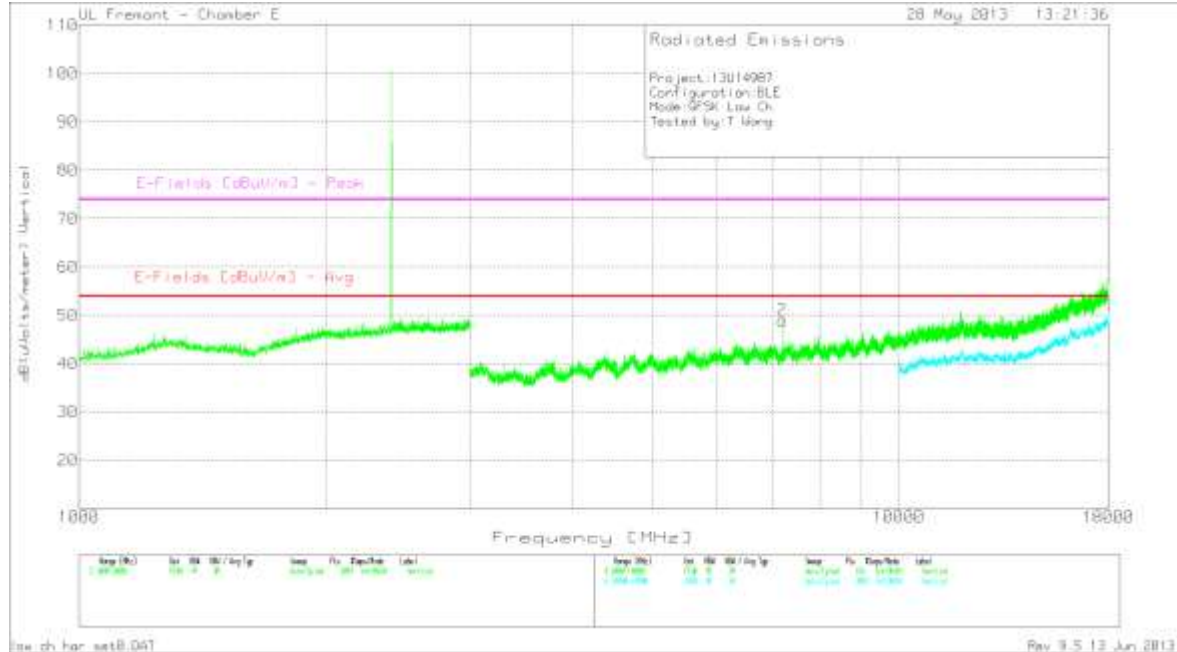


Vertical 3000 - 18000MHz												
Marker No.	Test Frequency	Meter Reading(dBuV)	Detector	T120 Antenna Factor (dB/m)	Preamp/Cable/HPF dB	dB(uV/s/meter)	E-Fields [dBuV/m] Avg	Margin (dB)	E-Fields [dBuV/m] Peak	Margin (dB)	Height [cm]	Polarity
2	7207.266	42.65	PK	35.7	-29.4	48.95	53.97	-5.02	74	-25.05	199	Vert
	Non Restricted band											

MID CH, HORIZONTAL

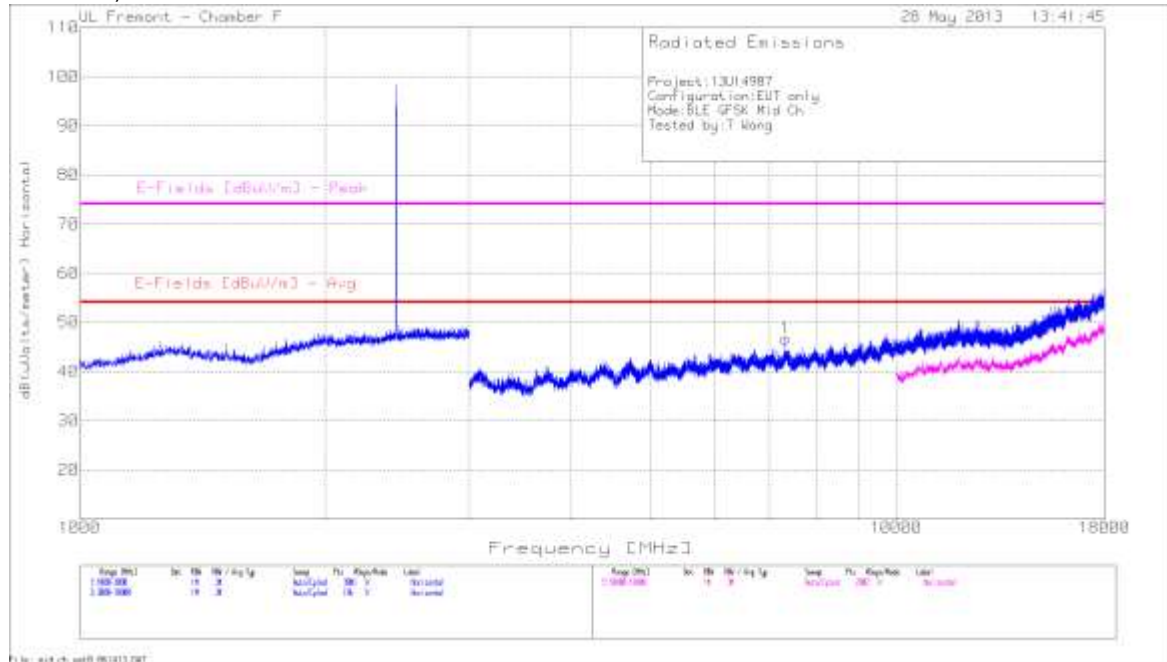

Horizontal 3000 - 18000MHz												
Marker No.	Test Frequency	Meter Reading(dBuV)	Detector	T120 Antenna Factor (dB/m)	Preamp/Cable/HPF dB	dB(uV/m)	E-Fields [dBuV/m] - Avg	Margin (dB)	E-Fields [dBuV/m] - Peak	Margin (dB)	Height [cm]	Polarity
1	7320.593	39.54	PK	35.7	-28.5	46.74	53.97	-7.23	74	-27.26	101	Horz

MID CH, VERTICAL

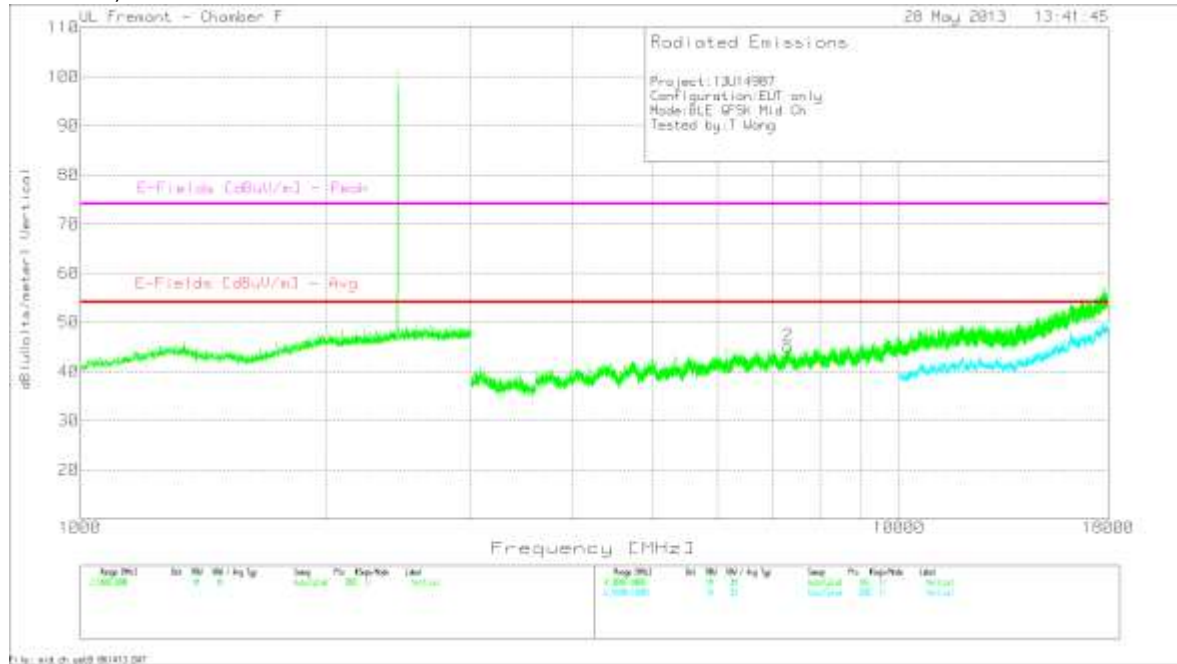

Vertical 3000 - 18000MHz												
Marker No.	Test Frequency	Meter Reading(dBuV)	Detector	T120 Antenna Factor (dB/m)	Preamp/C able/HPF dB	dB(uV s/meter)	E-Fields [dBuV/m] - Avg	Margin (dB)	E-Fields [dBuV/m] - Peak	Margin (dB)	Height [cm]	Polarity
2	7320.593	37.93	PK	35.7	-28.5	45.13	53.97	-8.84	74	-28.87	199	Vert

UL Front - Chamber F

Radiated Emissions

Project: 13014987
 Configuration: EUT only
 Mode: BLE GFSK High Ch
 Testbed by: T. Wong

dB C/mV/m (re 1V/m) - Horizontal

E-Fields [dBuV/m] - Peak

E-Fields [dBuV/m] - Avg


Frequency [MHz]

Range (MHz)	Set	Min	Max	Log Sp	Range (MHz)	Set	Min	Max	Log Sp	Range (MHz)	Set	Min	Max	Log Sp	Range (MHz)	Set	Min	Max	Log Sp
1.000-1000	0	0	0	0	1.000-1000	0	0	0	0	1.000-1000	0	0	0	0	1.000-1000	0	0	0	0

File: High ch set 8.000177.DAT

Horizontal 3000 - 18000MHz												
Marker No.	Test Frequency	Meter Reading(dBuV)	Detector	T120 Antenna Factor (dB/m)	Preamp/Cable/HPF dB	dB(uVolts /meter)	E-Fields [dBuV/m] Avg	Margin (dB)	E-Fields [dBuV/m] Peak	Margin (dB)	Height [cm]	Polarity
1	7326.426	38.91	PK	35.7	-28.4	46.21	53.97	-7.76	74	-27.79	100	Horz


HIGH CH, VERTICAL

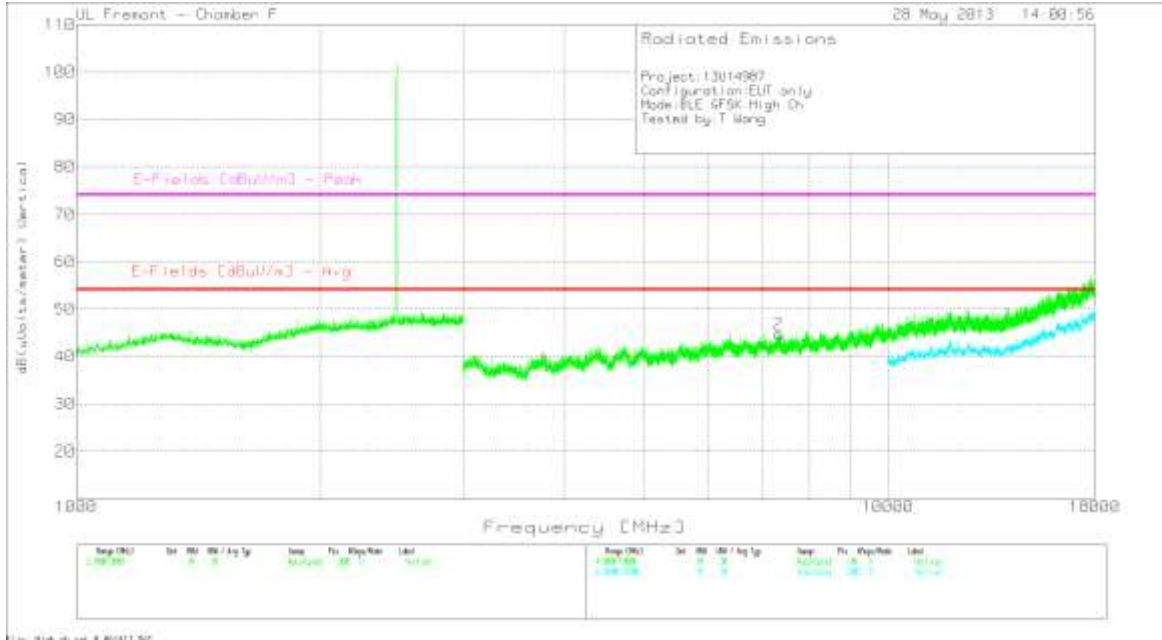


Vertical 3000 - 18000MHz												
Marker No.	Test Frequency	Meter Reading (dBuV)	Detector	T120 Antenna Factor (dB/m)	Preamp/Cable/HPF dB	dB(uVolts /meter)	E-Fields [dBuV/m] Avg	Margin (dB)	E-Fields [dBuV/m] Peak	Margin (dB)	Height [cm]	Polarity
2	7439.753	37.99	PK	35.8	-29.2	44.59	53.97	-9.38	74	-29.41	199	Vert

8.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

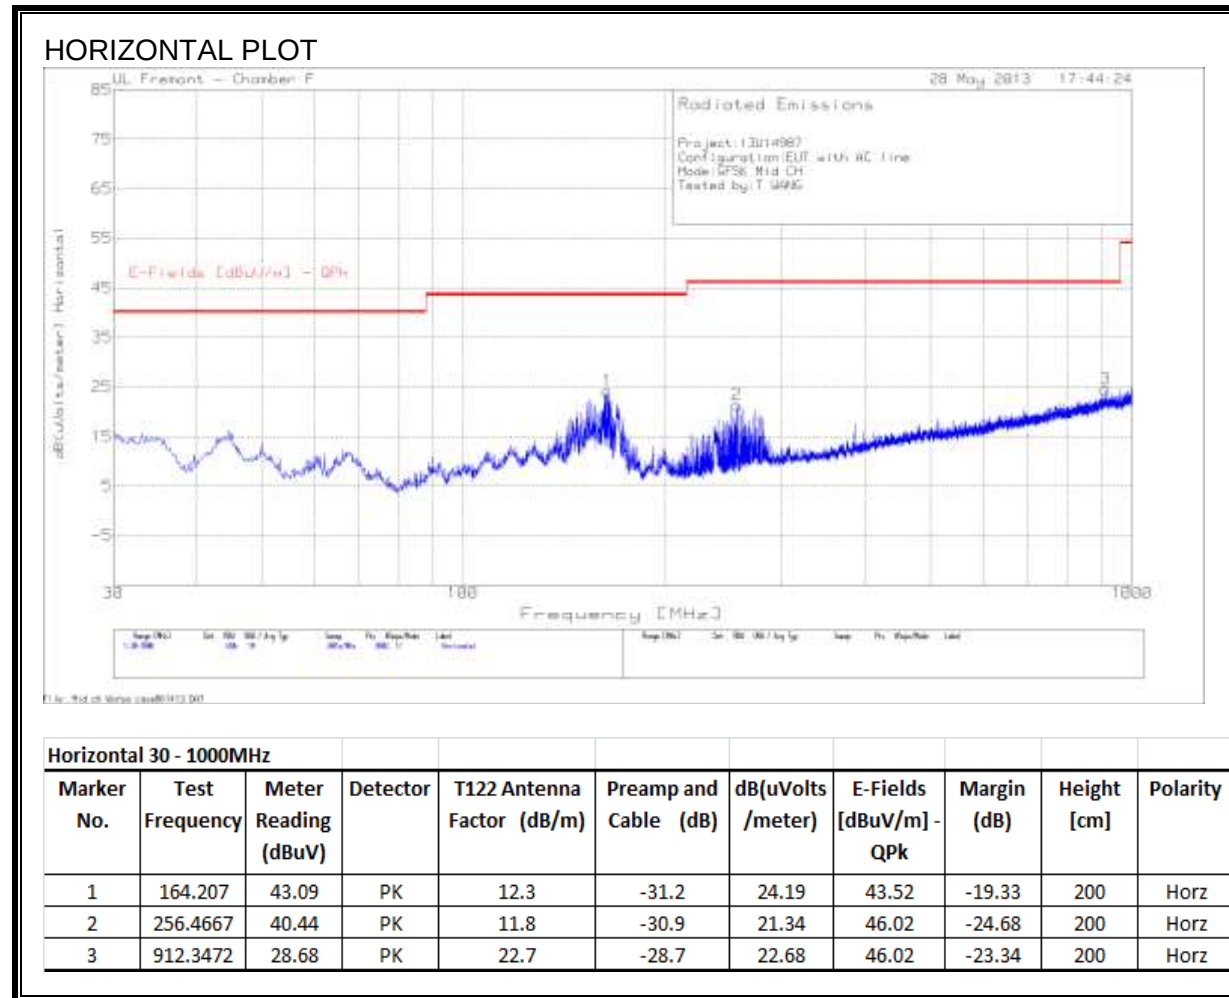

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

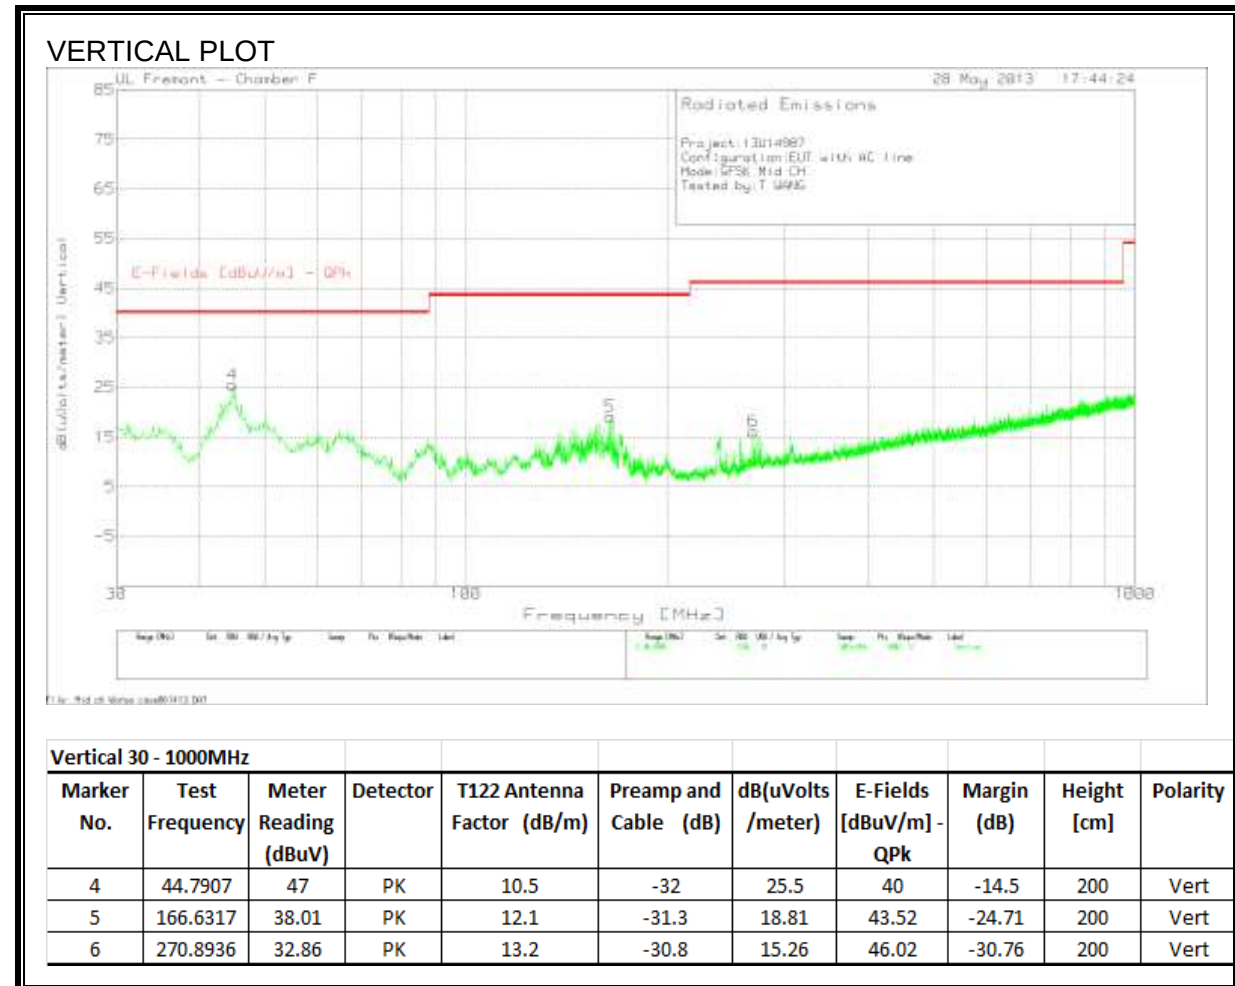

9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE


ANSI C63.4

RESULTS

6 WORST EMISSIONS

Project No:13U14987									
Client Name:									
Model/Device:WLAN Worst Case									
Test Volt/Freq:115V 60Hz									
Test By:Francisco Guarnero									
Line-L1 .15 - 30MHz									
Test Frequency	Meter Reading	Detector	T24 IL L1.TXT (dB)	LC Cables 1&3.TXT (dB)	dB(uVolts)	CISPR 11/22 Class B Quasi-peak	Margin	CISPR 11/22 Class B Average	Margin
0.1635	41.02	PK	0.1	0	41.12	65.3	-24.18	-	-
0.1635	-2.46	Av	0.1	0	-2.36	-	-	55.3	-57.66
0.249	37.2	PK	0.1	0	37.3	61.8	-24.5	-	-
0.249	-3.24	Av	0.1	0	-3.14	-	-	51.8	-54.94
0.3435	34.07	PK	0.1	0	34.17	59.1	-24.93	-	-
0.3435	-1.64	Av	0.1	0	-1.54	-	-	49.1	-50.64
0.7845	34.52	PK	0.1	0	34.62	56	-21.38	-	-
0.7845	5.76	Av	0.1	0	5.86	-	-	46	-40.14
18.303	23.71	PK	0.2	0.2	24.11	60	-35.89	-	-
18.303	-0.98	Av	0.2	0.2	-0.58	-	-	50	-50.58
Line-L2 .15 - 30MHz									
Test Frequency	Meter Reading	Detector	T24 IL L2.TXT (dB)	LC Cables 2&3.TXT (dB)	dB(uVolts)	CISPR 11/22 Class B Quasi-peak	Margin	CISPR 11/22 Class B Average	Margin
0.1725	40.56	PK	0.1	0	40.66	64.8	-24.14	-	-
0.1725	-2.94	Av	0.1	0	-2.84	-	-	54.8	-57.64
0.258	37.6	PK	0.1	0	37.7	61.5	-23.8	-	-
0.258	-3.12	Av	0.1	0	-3.02	-	-	51.5	-54.52
0.3345	33.88	PK	0.1	0	33.98	59.3	-25.32	-	-
0.3345	-4.07	Av	0.1	0	-3.97	-	-	49.3	-53.27
0.78	34.2	PK	0.1	0	34.3	56	-21.7	-	-
0.78	4.8	Av	0.1	0	4.9	-	-	46	-41.1
18.177	21.76	PK	0.2	0.2	22.16	60	-37.84	-	-
18.177	-4.17	Av	0.2	0.2	-3.77	-	-	50	-53.77

LINE 1 RESULTS

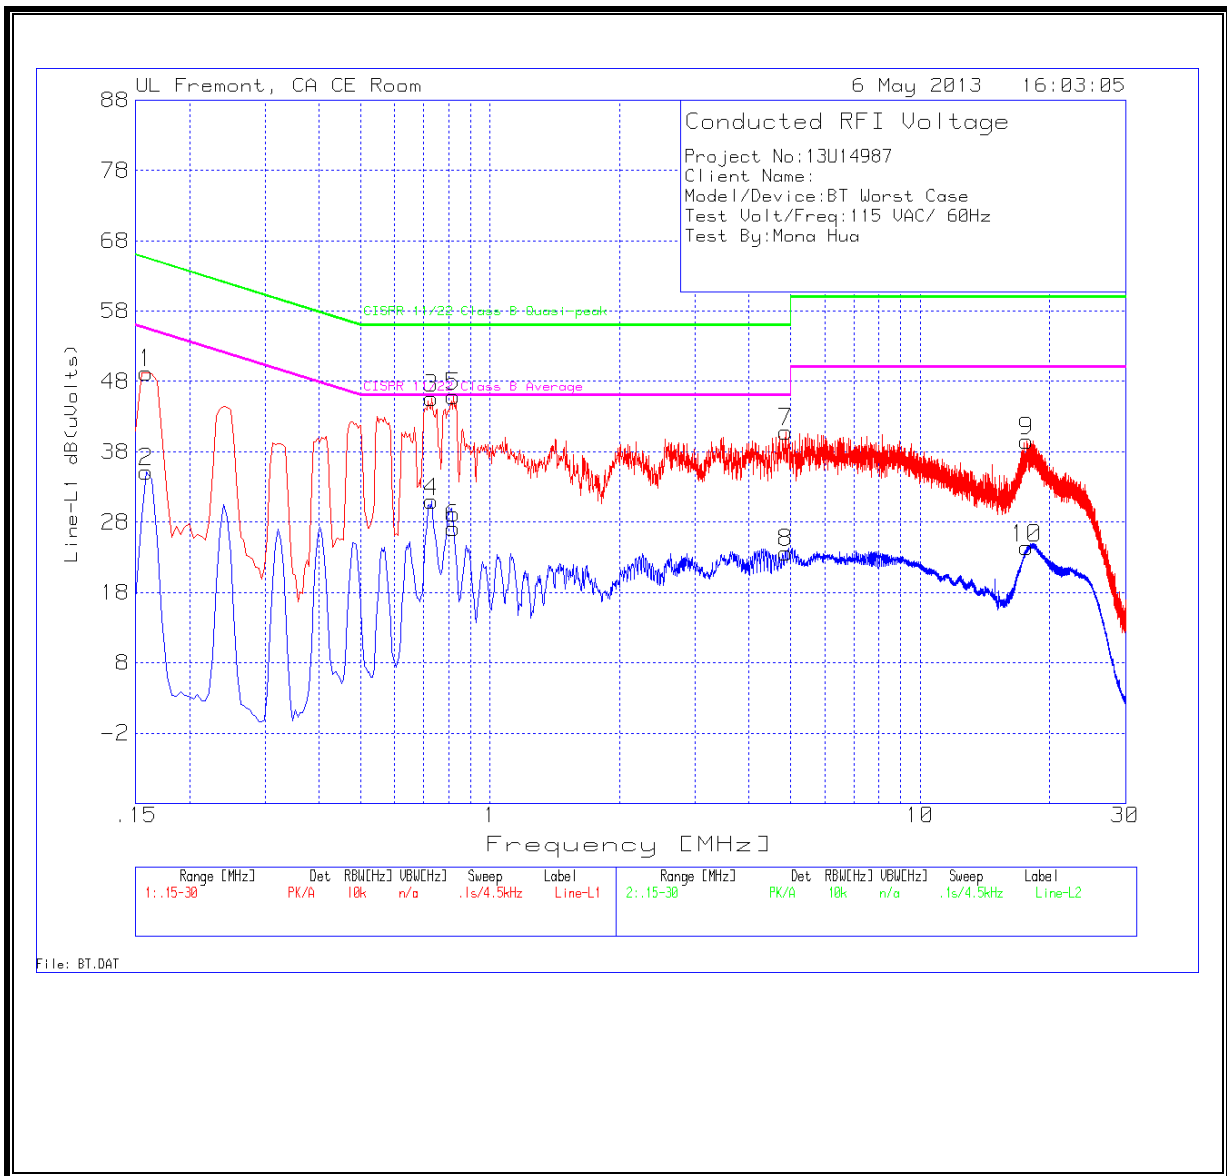

LINE 2 RESULTS

