



CERTIFICATION TEST REPORT

Report Number. : 12124121-E9V3

Applicant : APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A1920, A2099, A2100

FCC ID : BCG-E3218A

EUT Description : SMARTPHONE

Test Standard(s) : CFR47 PART 27

Date Of Issue:
AUGUST 17, 2018

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History


Rev.	Issue Date	Revisions	Revised By
V1	7/2/2018	Initial Review	Lieu Nguyen
V2	7/7/2018	Address TCB's Questions	Mengistu Mekuria
V3	8/17/2018	Update Power Table	John Thompson

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY	7
5. EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF EUT	8
5.2. DIFFERENCE IN MODEL NUMBER	8
5.3. MAXIMUM OUTPUT POWER	8
5.4. SOFTWARE AND FIRMWARE	11
5.5. MAXIMUM ANTENNA GAIN	11
5.6. WORST-CASE CONFIGURATION AND MODE	11
5.7. DESCRIPTION OF TEST SETUP	12
6. TEST AND MEASUREMENT EQUIPMENT	14
7. RF OUTPUT POWER VERIFICATION	15
7.1. ANT 1, ANT 2, ANT 3 AND ANT 4	16
7.1.1. LTE BAND 7	16
7.1.2. LTE BAND 41	20
8. CONDUCTED TEST RESULTS	24
8.1. OCCUPIED BANDWIDTH	24
8.1.1. LTE BAND 7	27
8.1.2. LTE BAND 41	30
8.2. EMISSION MASK	34
8.2.1. LTE BAND 7	35
8.2.2. LTE BAND 41	39
8.3. OUT OF BAND EMISSIONS	43
8.3.1. ANT 1, LTE BAND 7	44
8.3.2. ANT 1, LTE BAND 41	46
8.4. FREQUENCY STABILITY	48

8.4.1.	LTE BAND 7.....	49
8.4.2.	LTE BAND 41.....	50
8.5.	PEAK-TO-AVERAGE POWER RATIO.....	51
8.5.1.	LTE BAND 7.....	51
8.5.2.	LTE BAND 41.....	52
9.	RADIATED TEST RESULTS	52
9.1.	FIELD STRENGTH OF SPURIOUS RADIATION, ANT 1	53
9.1.1.	LTE BAND 7.....	53
9.1.2.	LTE BAND 41.....	54
9.2.	FIELD STRENGTH OF SPURIOUS RADIATION, ANT 2	55
9.2.1.	LTE BAND 7.....	55
9.2.2.	LTE BAND 41.....	56
9.3.	FIELD STRENGTH OF SPURIOUS RADIATION, ANT 3	57
9.3.1.	LTE BAND 7.....	57
9.3.2.	LTE BAND 41.....	58
9.4.	FIELD STRENGTH OF SPURIOUS RADIATION, ANT 4	59
9.4.1.	LTE BAND 7.....	59
9.4.2.	LTE BAND 41.....	60
10.	SETUP PHOTOS.....	61

1. ATTESTATION OF TEST RESULTS

Applicant Name and Address	APPLE, INC. 1 APPLE PARK WAY CUPERTINO, CA 95014, U.S.A.
Model	A1920, A2099, A2100
FCC ID	BCG-E3218A
EUT Description	Smartphone
Serial Number	C39WF00CJVX8
Date Tested	MARCH 05, 2018 to JUNE 07, 2018
Applicable Standards	CFR47 PART 27
Test Results	COMPLIES
UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.	
Approved & Released By: 	Prepared By: 
Mengistu Mekuria Lead Test Engineer UL Verification Services Inc.	Lieu Nguyen Test Engineer UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.26:2015, CFR 47 Part 2, KDB 971168 D01 v03r01/ D02 v02r01, Part 27. ANSI C63.26:2015

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A (IC:2324B-1)	☐ Chamber D (IC:22541-1)
☐ Chamber B (IC:2324B-2)	☒ Chamber E (IC:22541-2)
☐ Chamber C (IC:2324B-3)	☐ Chamber F (IC:22541-3)
	☐ Chamber G (IC:22541-4)
	☐ Chamber H (IC:22541-5)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at [NVLAP Lab Search](#).

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \\ &\text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Radiated Disturbance, 26000 to 40000 MHz	5.24 dB
Occupied Channel Bandwidth	±0.39 %
Temperature	±0.9 °C
Supply voltages	±0.45 %
Time	±0.02 %

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The Apple iPhone, is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, TD-SCDMA, CDMA, IEEE 802.11a/b/g/n/ac, Bluetooth, GPS and NFC. All models support at least one UICC based SIM. The second SIM is either UICC based, electronic SIM (e-SIM), or second SIM is not present. The device has a built-in inductive charging receiver which is not user accessible. The rechargeable battery is not user accessible.

5.2. DIFFERENCE IN MODEL NUMBER

Model A2099, A2100 is electrically identical to Model A1920. Three model numbers are allocated for marketing and logistic purposes only.

A1920 was used to perform all final tests.

5.3. MAXIMUM OUTPUT POWER

ERP/EIRP LIMIT

\$2.1046, \$27.50

EIRP/ERP TEST PROCEDURE

ANSI C63.26:2015

KDB 971168 D01 Section 5.6

KDB 412172 D01 Determining ERP and EIRP v01r01.

$ERP/EIRP = P_{Meas} + GT - LC$

where: ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

EUT includes different power levels for head use configuration and body use configuration and the below tables contain the highest of all configurations average conducted and ERP/EIRP output powers as follows:

OUTPUT POWER FOR LTE BAND 7

Part 27								
EIRP Limit (W)		2.00						
Antenna Gain (dBi)		-1.50						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator
10+20	QPSK	2505.5	2560.0	25.0	23.50	0.224	27898	27M9G7W
	16QAM			23.5	22.00	0.158	27946	27M9D7W
	64QAM			22.6	21.10	0.129	28159	28M2D7W
20+10	QPSK	2510.0	2564.5	24.9	23.40	0.219	27932	27M9G7W
	16QAM			23.4	21.90	0.155	27931	27M9D7W
	64QAM			22.3	20.80	0.120	28144	28M1D7W
15+15	QPSK	2507.5	2562.5	24.8	23.30	0.214	28501	28M5G7W
	16QAM			23.4	21.90	0.155	28503	28M5D7W
	64QAM			22.4	20.90	0.123	28703	28M7D7W
15+20	QPSK	2507.8	2560.0	25.0	23.50	0.224	32711	32M7G7W
	16QAM			24.4	22.90	0.195	32764	32M8D7W
	64QAM			23.5	22.00	0.158	32972	33M0D7W
20+15	QPSK	2510.0	2562.2	24.9	23.40	0.219	32756	32M8G7W
	16QAM			23.8	22.30	0.170	32756	32M8D7W
	64QAM			22.8	21.30	0.135	32954	33M0D7W
20+20	QPSK	2510.0	2560.0	25.0	23.50	0.224	37550	37M6G7W
	16QAM			23.8	22.30	0.170	37579	37M6D7W
	64QAM			22.9	21.40	0.138	37786	37M8D7W

OUTPUT POWER FOR LTE BAND 41

Part 27								
EIRP Limit (W)		2.00						
Antenna Gain (dBi)		-1.50						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator
5+20	QPSK	2499.3	2680.0	25.0	23.50	0.224	23306	23M3G7W
	16QAM			23.9	22.40	0.174	23335	23M3D7W
	64QAM			23.1	21.60	0.145	23444	23M4D7W
20+5	QPSK	2506.0	2686.7	24.9	23.40	0.219	23338	23M3G7W
	16QAM			23.9	22.40	0.174	23325	23M3D7W
	64QAM			23.1	21.60	0.145	23355	23M4D7W
10+20	QPSK	2501.5	2680.0	25.0	23.50	0.224	28126	28M1G7W
	16QAM			23.9	22.40	0.174	28069	28M1D7W
	64QAM			23.0	21.50	0.141	28168	28M2D7W
20+10	QPSK	2506.0	2684.5	24.9	23.40	0.219	28100	28M1G7W
	16QAM			24.0	22.50	0.178	28040	28M0D7W
	64QAM			23.2	21.70	0.148	28121	28M1D7W
15+15	QPSK	2503.5	2682.5	25.0	23.50	0.224	28626	28M6G7W
	16QAM			24.2	22.70	0.186	28552	28M6D7W
	64QAM			23.2	21.70	0.148	28698	28M7D7W
15+20	QPSK	2503.8	2680.0	25.0	23.50	0.224	32893	32M9G7W
	16QAM			24.2	22.70	0.186	32937	32M9D7W
	64QAM			23.1	21.60	0.145	32995	33M0D7W
20+15	QPSK	2506.0	2682.2	24.9	23.40	0.219	32963	33M0G7W
	16QAM			24.1	22.60	0.182	32803	32M8D7W
	64QAM			23.0	21.50	0.141	32966	33M0D7W
20+20	QPSK	2506.0	2680.0	25.0	23.50	0.224	37717	37M7G7W
	16QAM			24.1	22.60	0.182	37697	37M7D7W
	64QAM			23.3	21.80	0.151	37871	37M9D7W

5.4. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was version 0.26.01.

5.5. MAXIMUM ANTENNA GAIN

LTE Bands	Frequency Range (MHz)	Ant 1 Gain (dBi)	Ant 2 Gain (dBi)	Ant 3 Gain (dBi)	Ant 4 Gain (dBi)
Band 7	2500-2570	-1.5	-5.0	-4.1	-2.3
Band 41	2496-2690	-1.5	-5.0	-3.8	-2.2

5.6. WORST-CASE CONFIGURATION AND MODE

The EUT supports LTE dual carrier Bands of: Band 7, and Band 41.

The worst-case scenario for all measurements is based on the average conducted output power measurement investigation results. Output power measurements were measured on QPSK, 16QAM and 64QAM modulations. It was found that QPSK and 16QAM results were worst case. All testing was performed using QPSK and 16QAM modulations to represent the worst case.

All conducted tests were performed at Ant 1 as worst case since it has higher output powers. Only output power and occupied bandwidth were performed on the 64QAM due to power is lower than QPSK/16QAM

Radiated test was investigated in three orthogonal orientations X/Y/Z on Ant 1/Ant 2/Ant 3/Ant 4, it was determined that X (Flatbed) orientation was the worst-case orientation for all bands on all antenna without AC/DC adapter or headphones.

Radiated spurious emissions were investigated below 30MHz, 30MHz-1GHz and above 1GHz. There were no emissions found on below 30MHz and 30MHz-1GHz.

For simultaneous transmission of multiple channels in the 2.4/5 GHz and Cellular bands, no noticeable emission was found.

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List			
Description	Manufacturer	Model	Serial Number
Laptop AC/DC adapter	Delta Electronic	A1343	ADP-85EBT V85
Laptop	Apple	MacBook Pro	73008ACB7XJ


I/O CABLES (RF Conducted Test)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	US 115V	Un-shielded	2.0m	N/A
2	USB	1	DC	Un-shielded	1.0m	N/A
3	RF In/Out	1	EUT	Un-shielded	0.6m	N/A
4	RF In/Out	1	Communication Test Set	Un-shielded	1.2m	N/A
5	RF In/Out	1	Barrel	N/A	N/A	N/A


I/O CABLES (RF Radiated Test)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF In/Out	1	Antenna	Un-shielded	5.0m	N/A

CONDUCTED SETUP

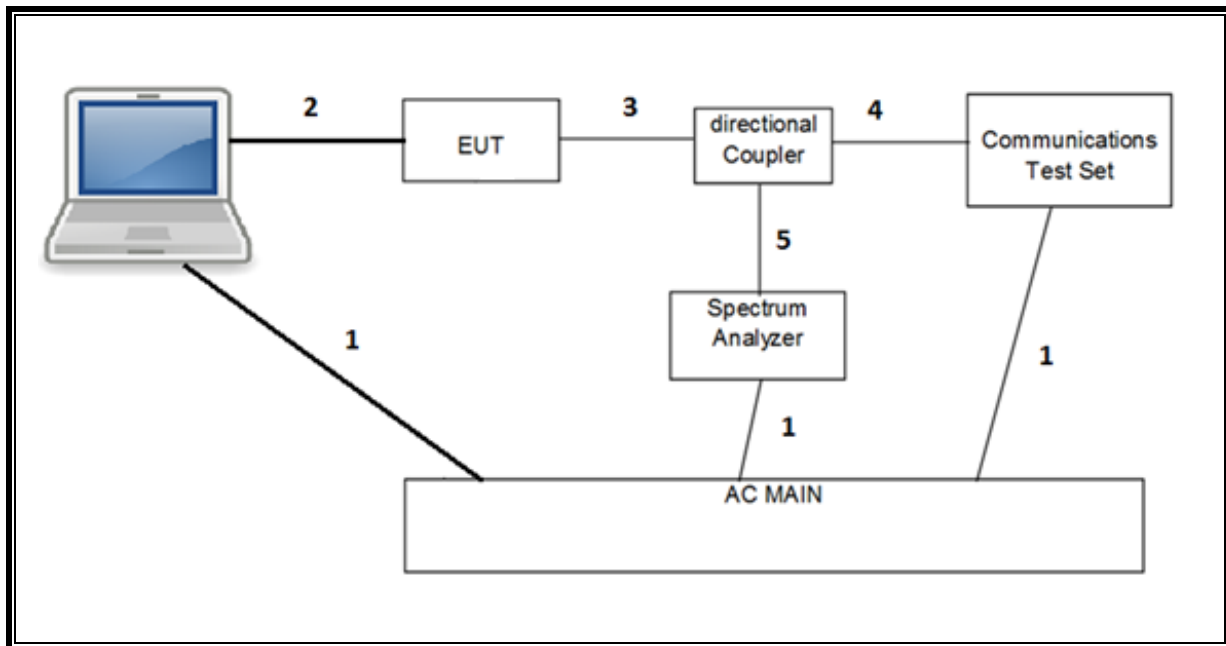

RADIATED SETUP

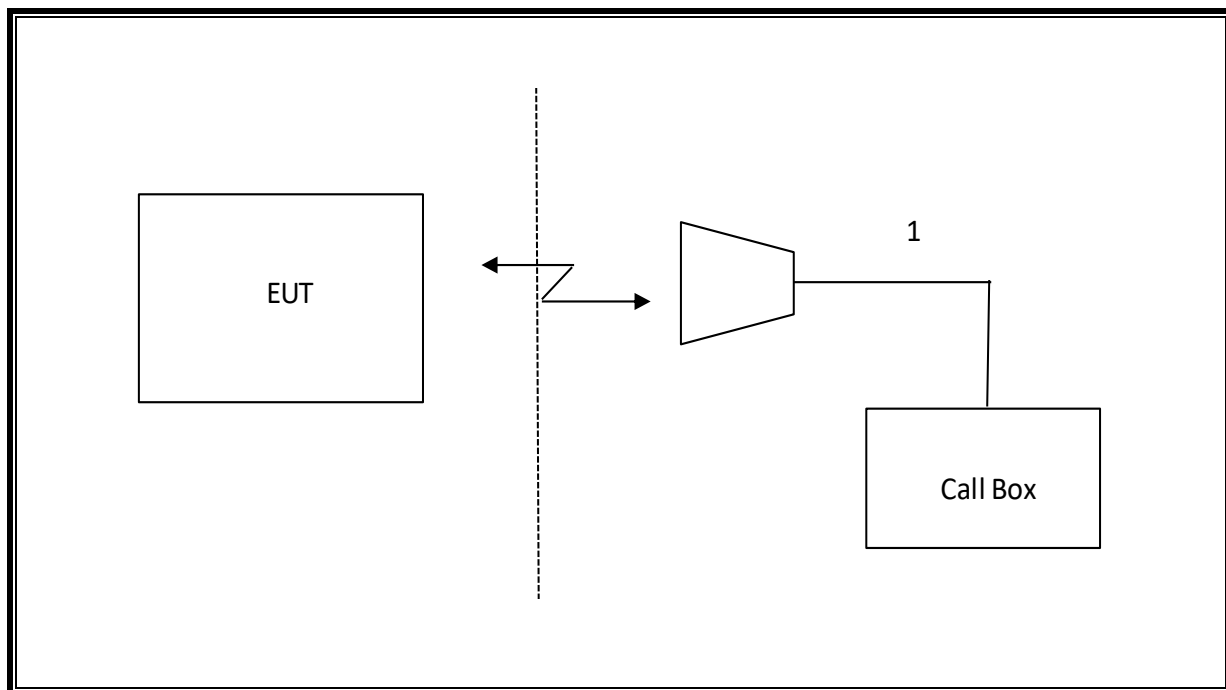

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T712	02/08/2019
*Antenna, Broadband Hybrid, 30MHz	Sunol Sciences	JB3	T900	05/31/2018
*Antenna, Broadband Hybrid, 30MHz	Sunol Sciences	JB3	T899	06/15/2018
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T741	12/30/2018
Amplifier, 1 to 8GHz	Miteq	AMF-4D-01000800-30-29P	T1169	12/30/2018
*Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T285	06/24/2018
Spectrum Analyzer, PXA 3Hz to	Keysight	N9030A	T906	02/16/2019
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T712	02/08/2019
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T119	04/03/2019
*Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	T407	04/14/2018
*Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T491	06/01/2018
*Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T834	06/01/2018
Spectrum Analyzer, PXA 3Hz to	Keysight	N9030A-544	T341	11/12/2018
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T119	04/03/2019
Filter, HPF 4GHz	MICROTRONICS	HPM13351	T1239	08/11/2018
Power Meter, P-series single channel	Keysight	N1912A	T1272	05/1/2019
Power Sensor	Keysight	N1921A	T1225	04/10/2019
Directional Coupler	KRYTAR	152610	T1537	04/27/2019
Directional Coupler	KRYTAR	152613	T1536	04/27/2019
Wideband Communication Test Set,	Rohde &	CMW500	T979	02/17/2019
Wideband Communication Test Set,	Rohde &	CMW500	T959	02/17/2019
Wideband Communication Test Set,	Rohde &	CMW500	T956	06/22/2018
Wideband Communication Test Set,	Rohde &	CMW500	T979	02/17/2019
Chamber, Environmental	Cincinnati Sub Zero	ZPHS-8-3.5-SCT/WC	T754	09/05/2018

Note: * Indicates on equipment list above are past due of the calibration dates, However, all tests are completed before equipment expiration dates indicated above.

7. RF OUTPUT POWER VERIFICATION

RULE PART(S)

§2.1046, §27.50

MODES TESTED

- LTE Band 7
- LTE Band 41

RESULT

EUT includes different power levels for head use configuration and body use configuration and the below tables contain the highest of all configurations average conducted output powers as follows:

7.1. ANT 1, ANT 2, ANT 3 AND ANT 4

7.1.1. LTE BAND 7

ID:	50820	Date:	3/6/18
------------	-------	--------------	--------

OUTPUT POWER FOR LTE BAND 7 (10.0MHz + 20.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
10MHz / 20MHz	2505.5	2519.9	1	49	1	0	25.0	23.5	22.6	21.4	20.0	19.0
			50	0	100	0	22.9	21.3	21.3	19.0	17.5	17.5
	2525.6	2540.0	1	49	1	0	24.9	23.5	22.6	21.3	19.7	18.7
			50	0	100	0	23.0	21.4	21.4	19.1	17.5	17.5
	2545.6	2560.0	1	49	1	0	24.8	23.3	22.1	20.7	19.3	18.2
			50	0	100	0	22.9	21.4	21.3	19.0	17.5	17.5

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 3			Ant 4		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
10MHz / 20MHz	2505.5	2519.9	1	49	1	0	24.5	23.5	22.3	18.3	17.5	16.4
			50	0	100	0	22.3	21.1	21.1	16.3	15.3	15.3
	2525.6	2540.0	1	49	1	0	24.3	23.3	22.3	18.7	17.8	16.7
			50	0	100	0	22.3	21.1	21.1	16.5	15.4	15.4
	2545.6	2560.0	1	49	1	0	24.0	22.7	21.6	18.2	17.1	16.1
			50	0	100	0	22.3	21.0	21.1	16.4	15.4	15.4

OUTPUT POWER FOR LTE BAND 7 (20.0MHz + 10.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20MHz / 10MHz	2510.0	2524.4	1	99	1	0	24.9	23.4	22.2	21.3	20.4	19.5
			1	0	1	49	16.2	15.9	15.3	12.9	13.0	13.2
			100	0	50	0	22.9	21.3	21.0	19.4	18.5	18.5
	2530.1	2544.5	1	99	1	0	24.9	23.4	22.3	21.5	20.6	19.4
			1	0	1	49	16.5	16.0	15.8	13.0	13.0	12.9
			100	0	50	0	23.0	21.5	21.0	19.5	18.5	18.5
	2550.1	2564.5	1	99	1	0	24.9	23.4	22.0	21.4	20.4	19.4
			1	0	1	49	16.3	15.9	15.6	12.9	13.0	13.0
			100	0	50	0	22.9	21.3	21.0	19.4	18.4	18.4

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 3			Ant 4		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20MHz / 10MHz	2510.0	2524.4	1	99	1	0	24.5	23.2	22.3	18.3	17.4	16.5
			1	0	1	49	15.9	15.6	15.8	9.7	9.8	10.0
			100	0	50	0	22.5	21.1	21.1	16.4	15.4	15.4
	2530.1	2544.5	1	99	1	0	24.5	23.1	22.2	18.4	17.5	16.4
			1	0	1	49	16.1	15.8	15.9	10.0	10.0	9.9
			100	0	50	0	22.5	21.1	21.1	16.5	15.4	15.4
	2550.1	2564.5	1	99	1	0	24.4	23.1	22.0	18.4	17.5	16.4
			1	0	1	49	16.0	15.7	15.8	9.9	10.0	9.9
			100	0	50	0	22.5	21.1	21.1	16.4	15.4	15.4

OUTPUT POWER FOR LTE BAND 7 (15.0MHz + 15.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
15MHz / 15MHz	2507.5	2522.5	1	74	1	0	24.8	23.3	22.4	21.4	20.4	19.5
			75	0	75	0	22.9	21.3	20.2	19.5	18.5	18.5
	2527.5	2542.5	1	74	1	0	24.8	23.4	22.4	21.5	20.5	19.4
			75	0	75	0	22.9	21.4	20.2	19.4	18.5	18.5
	2547.5	2562.5	1	74	1	0	24.7	23.3	22.3	21.3	20.3	19.4
			75	0	75	0	22.9	21.4	20.0	19.4	18.5	18.5

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 3			Ant 4		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
15MHz / 15MHz	2507.5	2522.5	1	74	1	0	24.4	23.3	22.3	18.4	17.4	16.5
			75	0	75	0	22.5	21.2	21.2	16.4	15.4	15.4
	2527.5	2542.5	1	74	1	0	24.3	23.2	22.0	18.4	17.5	16.6
			75	0	75	0	22.4	21.1	21.1	16.4	15.4	15.4
	2547.5	2562.5	1	74	1	0	24.2	23.0	21.9	18.3	17.4	16.4
			75	0	75	0	22.4	21.1	21.1	16.5	15.4	15.4

OUTPUT POWER FOR LTE BAND 7 (15.0MHz + 20.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
15MHz / 20MHz	2507.8	2524.9	1	74	1	0	25.0	24.4	23.5	21.3	20.6	19.6
			75	0	100	0	23.2	22.5	21.0	19.3	18.6	18.6
	2525.3	2542.4	1	74	1	0	25.0	24.4	23.4	21.4	20.6	19.6
			75	0	100	0	23.2	22.5	20.9	19.4	18.6	18.6
	2542.9	2560.0	1	74	1	0	24.9	24.4	23.2	21.2	20.5	19.5
			75	0	100	0	23.1	22.5	20.9	19.3	18.6	18.6

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 3			Ant 4		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
15MHz / 20MHz	2507.8	2524.9	1	74	1	0	24.4	23.4	22.4	18.5	17.6	16.7
			75	0	100	0	22.5	21.2	21.2	16.5	15.4	15.4
	2525.3	2542.4	1	74	1	0	24.3	23.3	22.2	18.6	17.8	16.7
			75	0	100	0	22.5	21.3	21.3	16.6	15.6	15.6
	2542.9	2560.0	1	74	1	0	24.2	23.1	22.0	18.4	17.5	16.5
			75	0	100	0	22.4	21.2	21.2	16.5	15.5	15.5

OUTPUT POWER FOR LTE BAND 7 (20.0MHz + 15.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20MHz / 15MHz	2510.0	2527.1	1	99	1	0	24.9	23.7	22.7	21.3	20.4	19.5
			100	0	75	0	23.0	21.7	21.1	19.5	18.6	18.6
	2527.6	2544.7	1	99	1	0	24.7	23.8	22.8	21.5	20.5	19.6
			100	0	75	0	23.1	21.7	21.0	19.6	18.6	18.6
	2545.1	2562.2	1	99	1	0	24.9	23.6	22.5	21.3	20.4	19.5
			100	0	75	0	23.0	21.7	20.9	19.5	18.6	18.6

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 3			Ant 4		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20MHz / 15MHz	2510.0	2527.1	1	99	1	0	24.4	23.2	22.3	18.3	17.4	16.5
			100	0	75	0	22.4	21.2	21.2	16.5	15.5	15.5
	2527.6	2544.7	1	99	1	0	24.3	23.2	22.1	18.5	17.6	16.7
			100	0	75	0	22.5	21.2	21.2	16.6	15.5	15.5
	2545.1	2562.2	1	99	1	0	24.2	22.9	21.9	18.3	17.4	16.5
			100	0	75	0	22.5	21.2	21.2	16.6	15.5	15.5

OUTPUT POWER FOR LTE BAND 7 (20.0MHz + 20.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20MHz/ 20MHz	2510.0	2529.8	1	99	1	0	25.0	23.8	22.9	21.3	20.5	19.6
			1	0	1	99	16.2	16.1	13.3	12.6	12.8	13.0
			100	0	100	0	23.0	21.8	20.6	19.4	18.6	18.6
	2525.1	2544.9	1	99	1	0	24.9	23.8	22.7	21.4	20.7	19.7
			1	0	1	99	16.3	16.1	13.3	12.7	13.0	13.0
			100	0	100	0	23.1	21.8	20.6	19.5	18.7	18.7
	2540.2	2560.0	1	99	1	0	24.8	23.5	22.4	21.2	20.6	19.6
			1	0	1	99	16.2	16.0	13.0	12.6	12.8	12.9
			100	0	100	0	23.0	21.7	20.3	19.4	18.6	18.6

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 3			Ant 4		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20MHz/ 20MHz	2510.0	2529.8	1	99	1	0	24.5	23.4	22.4	18.5	17.6	16.7
			1	0	1	99	15.7	15.5	15.7	9.6	9.6	9.8
			100	0	100	0	22.6	21.3	21.3	16.6	15.5	15.5
	2525.1	2544.9	1	99	1	0	24.4	23.2	22.2	18.6	17.7	16.7
			1	0	1	99	16.0	15.7	15.8	9.8	9.9	9.9
			100	0	100	0	22.7	21.2	21.3	16.6	15.6	15.6
	2540.2	2560.0	1	99	1	0	24.3	23.0	22.1	18.4	17.5	16.5
			1	0	1	99	15.8	15.5	15.7	9.8	9.9	9.9
			100	0	100	0	22.5	21.2	21.2	16.6	15.6	15.6

7.1.2. LTE BAND 41

ID:	10646	Date:	3/7/18
------------	-------	--------------	--------

OUTPUT POWER FOR LTE BAND 41 (5.0MHz + 20.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
5MHz / 20MHz	2499.3	2511.0	1	24	1	0	24.8	23.8	22.8	22.5	21.5	20.5
			25	0	100	0	22.7	21.7	21.6	20.3	19.4	19.3
	2583.8	2595.5	1	24	1	0	24.4	23.3	22.4	22.3	21.2	20.1
			25	0	100	0	22.7	21.7	21.6	20.3	19.4	19.4
	2668.3	2680.0	1	24	1	0	25.0	23.9	23.1	22.0	21.5	20.9
			25	0	100	0	22.8	21.8	21.8	20.4	19.5	19.6

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 3			Ant 4		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
5MHz / 20MHz	2499.3	2511.0	1	24	1	0	24.5	23.7	22.0	21.6	20.6	19.7
			25	0	100	0	22.0	20.9	20.4	18.9	17.9	18.0
	2583.8	2595.5	1	24	1	0	23.5	22.5	20.9	20.9	19.8	18.8
			25	0	100	0	21.5	20.6	20.0	19.0	18.0	18.1
	2668.3	2680.0	1	24	1	0	23.9	23.1	21.8	21.4	20.4	19.6
			25	0	100	0	21.5	20.6	20.1	19.1	18.1	18.3

OUTPUT POWER FOR LTE BAND 41 (20.0MHz + 5.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20MHz / 5MHz	2506.0	2517.7	1	99	1	0	24.8	23.8	23.1	22.5	21.5	20.6
			1	0	1	24	16.7	16.6	16.0	14.8	15.4	14.1
			100	0	25	0	22.7	21.7	21.6	20.2	19.3	19.3
	2590.5	2602.2	1	99	1	0	24.8	23.9	22.8	22.5	21.5	20.6
			1	0	1	24	17.5	17.7	16.9	14.3	14.9	14.7
			100	0	25	0	22.7	21.7	21.5	20.3	19.4	19.3
	2675.0	2686.7	1	99	1	0	24.9	23.9	23.1	22.6	21.7	20.9
			1	0	1	24	16.5	16.6	16.1	14.8	14.7	14.4
			100	0	25	0	22.7	21.8	21.7	20.5	19.5	19.5

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 3			Ant 4		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20MHz / 5MHz	2506.0	2517.7	1	99	1	0	24.5	23.6	22.2	21.5	20.7	20.0
			1	0	1	24	17.4	16.9	15.7	13.8	13.0	13.7
			100	0	25	0	22.6	21.7	21.2	19.9	18.9	19.0
	2590.5	2602.2	1	99	1	0	24.3	23.4	22.0	21.6	20.8	20.0
			1	0	1	24	16.7	16.5	15.9	13.2	13.4	13.7
			100	0	25	0	22.2	21.2	20.7	19.6	18.6	18.8
	2675.0	2686.7	1	99	1	0	24.2	23.3	22.0	21.8	21.0	20.4
			1	0	1	24	17.0	15.6	15.6	14.2	13.4	14.3
			100	0	25	0	22.1	21.1	20.7	19.7	18.8	19.0

OUTPUT POWER FOR LTE BAND 41 (10.0MHz + 20.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
10MHz / 20MHz	2501.5	2515.9	1	49	1	0	25.0	23.9	23.0	22.2	21.2	20.2
			50	0	100	0	22.8	21.8	21.7	19.9	19.0	19.0
	2583.6	2598.0	1	49	1	0	24.9	23.9	23.0	22.3	21.2	20.5
			50	0	100	0	22.8	21.8	21.6	20.0	19.0	19.1
	2665.6	2680.0	1	49	1	0	24.7	23.7	22.7	22.4	21.5	20.8
			50	0	100	0	22.8	21.8	21.6	20.1	19.2	19.2

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 3			Ant 4		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
10MHz / 20MHz	2501.5	2515.9	1	49	1	0	24.4	23.4	22.4	21.4	20.2	19.6
			50	0	100	0	21.9	20.9	20.9	19.0	17.9	18.2
	2583.6	2598.0	1	49	1	0	23.8	22.8	22.1	21.3	20.3	19.6
			50	0	100	0	21.5	20.5	20.6	19.2	18.2	18.4
	2665.6	2680.0	1	49	1	0	23.9	23.1	22.2	21.3	20.4	19.7
			50	0	100	0	21.5	20.5	20.5	19.2	18.2	18.5

OUTPUT POWER FOR LTE BAND 41 (20.0MHz + 10.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20MHz / 10MHz	2506.0	2520.4	1	99	1	0	24.8	23.9	22.8	22.4	21.4	20.5
			100	0	50	0	22.7	21.7	21.7	20.1	19.2	19.1
	2588.1	2602.5	1	99	1	0	24.9	23.9	22.8	22.4	21.5	20.6
			100	0	50	0	22.7	21.7	21.5	20.2	19.2	19.2
	2670.1	2684.5	1	99	1	0	24.9	24.0	23.2	22.5	21.7	20.9
			100	0	50	0	22.7	21.7	21.6	20.3	19.3	19.4

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 3			Ant 4		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20MHz / 10MHz	2506.0	2520.4	1	99	1	0	24.5	23.7	22.8	21.2	20.4	19.6
			100	0	50	0	22.5	21.5	21.5	19.2	18.2	18.4
	2588.1	2602.5	1	99	1	0	24.3	23.4	22.5	21.2	20.4	19.7
			100	0	50	0	22.1	21.1	21.2	19.1	18.1	18.4
	2670.1	2684.5	1	99	1	0	24.2	23.6	22.5	21.5	20.7	20.1
			100	0	50	0	22.0	21.1	21.0	19.3	18.3	18.6

OUTPUT POWER FOR LTE BAND 41 (15.0MHz + 15.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
15MHz / 15MHz	2503.5	2518.5	1	74	1	0	25.0	23.9	22.8	22.2	21.3	20.1
			75	0	75	0	22.8	21.8	21.6	19.9	19.0	19.0
	2585.5	2600.5	1	74	1	0	25.0	24.0	23.1	22.3	21.4	20.2
			75	0	75	0	22.7	21.8	21.6	20.0	19.0	19.0
	2667.5	2682.5	1	74	1	0	25.0	24.2	23.2	22.4	21.6	20.5
			75	0	75	0	22.8	21.8	21.7	20.1	19.1	19.1

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 3			Ant 4		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
15MHz / 15MHz	2503.5	2518.5	1	74	1	0	24.4	23.5	22.5	21.3	20.4	19.5
			75	0	75	0	22.2	21.2	21.2	19.1	18.1	18.3
	2585.5	2600.5	1	74	1	0	24.0	23.2	22.1	21.4	20.5	19.6
			75	0	75	0	21.8	20.8	20.9	19.2	18.2	18.4
	2667.5	2682.5	1	74	1	0	24.0	23.2	22.0	21.6	20.7	19.9
			75	0	75	0	21.7	20.8	20.7	19.3	18.3	18.6

OUTPUT POWER FOR LTE BAND 41 (15.0MHz + 20.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
15MHz / 20MHz	2503.8	2520.9	1	74	1	0	25.0	23.9	23.0	22.2	21.1	20.1
			75	0	100	0	22.8	21.8	21.5	19.9	18.9	18.9
	2583.3	2600.4	1	74	1	0	25.0	24.1	23.1	22.2	21.3	20.2
			75	0	100	0	22.8	21.8	21.6	19.9	18.9	19.0
	2662.9	2680.0	1	74	1	0	25.0	24.2	23.1	22.4	21.6	20.4
			75	0	100	0	22.8	21.9	21.7	20.0	19.0	19.1

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 3			Ant 4		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
15MHz / 20MHz	2503.8	2520.9	1	74	1	0	24.4	23.6	22.4	21.4	20.6	19.3
			75	0	100	0	21.9	20.9	20.9	19.0	18.0	17.8
	2583.3	2600.4	1	74	1	0	24.0	21.6	22.1	21.4	20.7	19.3
			75	0	100	0	23.1	20.7	20.7	19.1	18.2	18.1
	2662.9	2680.0	1	74	1	0	24.0	23.0	22.1	21.6	20.8	19.6
			75	0	100	0	21.6	20.6	20.6	19.4	18.4	18.2

OUTPUT POWER FOR LTE BAND 41 (20.0MHz + 15.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20MHz / 15MHz	2506.0	2523.1	1	99	1	0	24.8	24.0	23.0	22.2	21.4	20.4
			100	0	75	0	22.7	21.8	21.6	20.0	19.0	19.1
	2585.6	2602.7	1	99	1	0	24.9	24.1	23.0	22.2	21.3	20.5
			100	0	75	0	22.7	21.7	21.5	20.0	19.1	19.1
	2665.1	2682.2	1	99	1	0	24.9	24.0	22.9	22.3	21.4	20.8
			100	0	75	0	22.7	21.7	21.5	20.1	19.2	19.2

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 3			Ant 4		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20MHz / 15MHz	2506.0	2523.1	1	99	1	0	24.5	23.8	22.8	21.4	20.5	19.4
			100	0	75	0	22.3	21.3	21.3	19.2	18.2	18.2
	2585.6	2602.7	1	99	1	0	24.2	23.4	22.6	21.4	20.5	19.5
			100	0	75	0	22.1	21.1	21.1	19.4	18.4	18.2
	2665.1	2682.2	1	99	1	0	24.2	23.5	22.4	21.7	20.9	20.0
			100	0	75	0	22.0	21.0	20.9	19.5	18.6	18.5

OUTPUT POWER FOR LTE BAND 41 (20.0MHz + 20.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20MHz/ 20MHz	2506.0	2525.8	1	99	1	0	25.0	24.1	23.3	22.5	21.5	20.7
			1	0	1	99	16.1	16.1	16.2	13.6	13.7	13.8
			100	0	100	0	22.9	21.8	21.8	20.3	19.4	19.4
	2583.1	2602.9	1	99	1	0	25.0	24.1	23.3	22.5	21.6	20.7
			1	0	1	99	16.2	16.2	13.1	13.7	13.6	13.8
			100	0	100	0	22.9	21.9	20.6	20.3	19.3	19.4
	2660.2	2680.0	1	99	1	0	25.0	24.1	23.2	22.6	21.7	20.9
			1	0	1	99	15.9	16.0	16.1	13.6	13.6	13.9
			100	0	100	0	22.8	21.8	21.8	20.3	19.4	19.5

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 3			Ant 4		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20MHz/ 20MHz	2506.0	2525.8	1	99	1	0	24.4	23.5	22.6	21.5	20.7	19.8
			1	0	1	99	15.1	15.3	15.2	12.4	12.6	12.9
			100	0	100	0	22.1	21.1	21.1	19.4	18.4	18.4
	2583.1	2602.9	1	99	1	0	24.1	23.4	22.5	21.7	20.8	19.9
			1	0	1	99	15.3	15.4	15.4	13.0	13.2	13.3
			100	0	100	0	21.9	20.9	21.0	19.6	18.5	18.6
	2660.2	2680.0	1	99	1	0	24.1	23.3	22.4	21.8	21.0	20.2
			1	0	1	99	15.2	15.2	15.4	13.0	13.1	13.5
			100	0	100	0	21.9	20.9	20.8	19.6	18.6	18.6

8. CONDUCTED TEST RESULTS

8.1. OCCUPIED BANDWIDTH

RULE PART(S)

§2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the middle channel in each band. The 99% and -26dB bandwidths was also measured and recorded.

MODES TESTED

- LTE Band 7
- LTE Band 41

RESULTS

There is no limit required and power is the same for low, middle and high channel; therefore, only middle channel was tested


LTE BAND 7

Band	Mode	RB Allocation/RB Offset	f (MHz)	99% BW (MHz)	- 26dB BW (MHz)
LTE BAND 7	10MHz + 20MHz BAND OPSK	50/0 + 100/0	2535	27.898	30.08
	10MHz + 20MHz BAND 16QAM			27.946	30.05
	10MHz + 20MHz BAND 64QAM			28.159	30.96
	20MHz + 10MHz BAND OPSK	100/0 + 50/0		27.932	30.18
	20MHz + 10MHz BAND 16QAM			27.931	30.09
	20MHz + 10MHz BAND 64QAM			28.144	31.14
	15MHz + 15MHz BAND OPSK	75/0 + 75/0		28.501	30.81
	15MHz + 15MHz BAND 16QAM			28.503	30.78
	15MHz + 15MHz BAND 64QAM			28.703	31.57
	15MHz + 20MHz BAND OPSK	75/0 + 100/0		32.711	35.14
	15MHz + 20MHz BAND 16QAM			32.764	35.12
	15MHz + 20MHz BAND 64QAM			32.972	36.02
	20MHz + 15MHz BAND OPSK	100/0 + 75/0		32.756	35.15
	20MHz + 15MHz BAND 16QAM			32.756	35.14
	20MHz + 15MHz BAND 64QAM			32.954	36.41
	20MHz + 20MHz BAND OPSK	100/0 + 100/0		37.550	40.15
	20MHz + 20MHz BAND 16QAM			37.579	40.11
	20MHz + 20MHz BAND 64QAM			37.786	41.87


LTE BAND 41

Band	Mode	RB Allocation/RB Offset	f (MHz)	99% BW (MHz)	- 26dB BW (MHz)
LTE BAND 41 (FCC)	5MHz + 20MHz BAND QPSK	25/0 + 100/0	2593	23.306	25.05
	5MHz + 20MHz BAND 16QAM			23.335	25.69
	5MHz + 20MHz BAND 64QAM			23.444	28.49
	20MHz + 5MHz BAND QPSK	100/0 + 25/0		23.338	25.16
	20MHz + 5MHz BAND 16QAM			23.325	25.42
	20MHz + 5MHz BAND 64QAM			23.355	27.21
	10MHz + 20MHz BAND QPSK	50/0 + 100/0		28.126	30.33
	10MHz + 20MHz BAND 16QAM			28.069	30.67
	10MHz + 20MHz BAND 64QAM			28.168	30.96
	20MHz + 10MHz BAND QPSK	100/0 + 50/0		28.100	30.41
	20MHz + 10MHz BAND 16QAM			28.040	30.52
	20MHz + 10MHz BAND 64QAM			28.121	33.70
	15MHz + 15MHz BAND QPSK	75/0 + 75/0		28.626	31.02
	15MHz + 15MHz BAND 16QAM			28.552	30.85
	15MHz + 15MHz BAND 64QAM			28.698	39.33
	15MHz + 20MHz BAND QPSK	75/0 + 100/0		32.893	35.78
	15MHz + 20MHz BAND 16QAM			32.937	36.62
	15MHz + 20MHz BAND 64QAM			32.995	40.17
	20MHz + 15MHz BAND QPSK	100/0 + 75/0		32.963	35.55
	20MHz + 15MHz BAND 16QAM			32.803	35.85
	20MHz + 15MHz BAND 64QAM			32.966	38.07
	20MHz + 20MHz BAND QPSK	100/0 + 100/0		37.717	40.67
	20MHz + 20MHz BAND 16QAM			37.697	40.53
	20MHz + 20MHz BAND 64QAM			37.871	42.21


8.1.1. LTE BAND 7

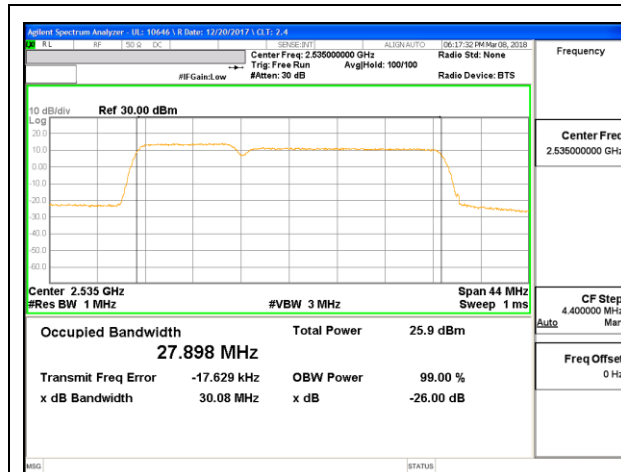


LTE B7 10MHz + 20MHz QPSK RB50-0 + RB100-0

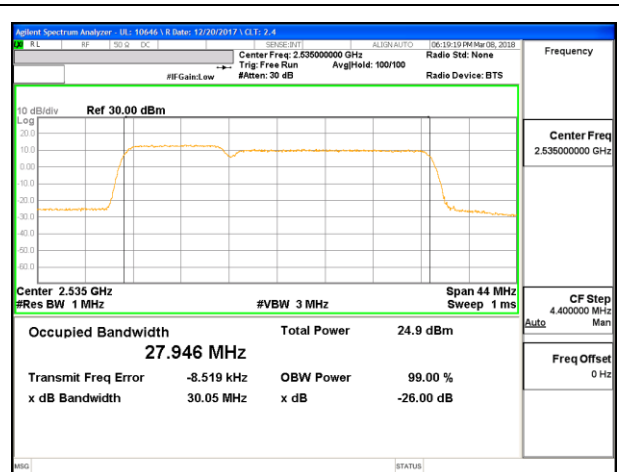


LTE B7 10MHz + 20MHz 16QAM RB50-0 + RB100-0

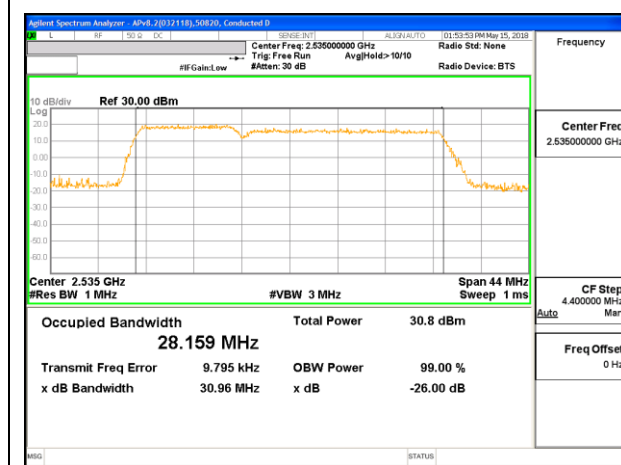


LTE B7 10MHz + 20MHz 64QAM RB50-0 + RB100-0

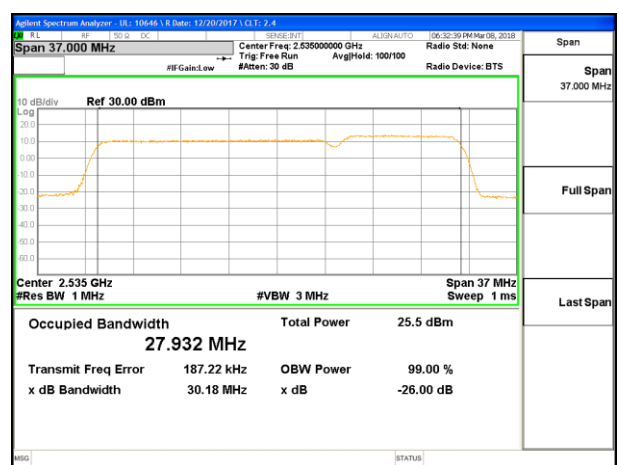

LTE B7 20MHz + 10MHz QPSK RB100-0 + RB50-0

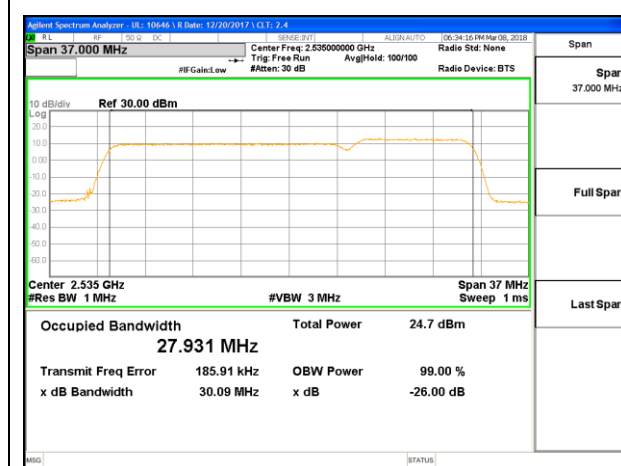


LTE B7 20MHz + 10MHz 16QAM RB100-0 + RB50-0

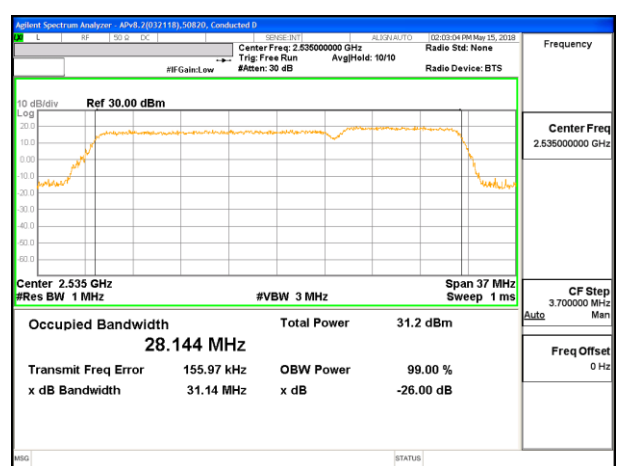


LTE B7 20MHz + 10MHz 64QAM RB100-0 + RB50-0




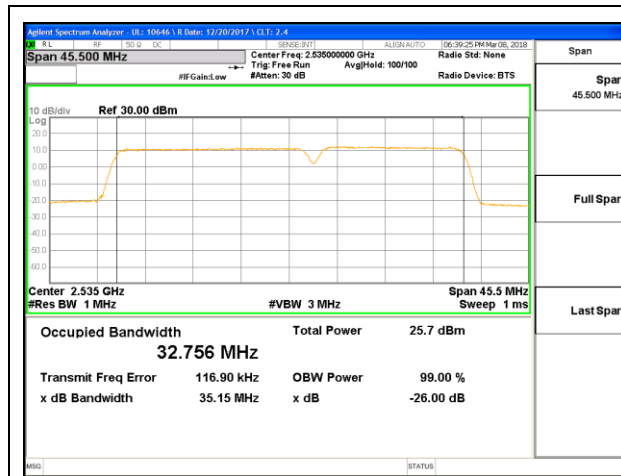


LTE B7 20MHz + 15MHz QPSK RB100-0 + RB75-0

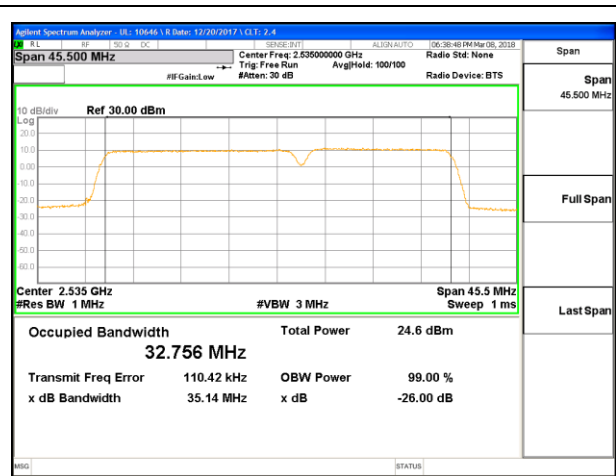


LTE B7 20MHz + 15MHz 16QAM RB100-0 + RB75-0

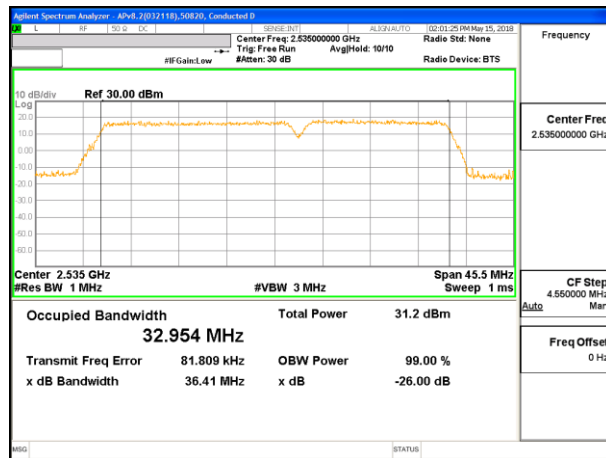


LTE B7 20MHz + 15MHz 64QAM RB100-0 + RB75-0

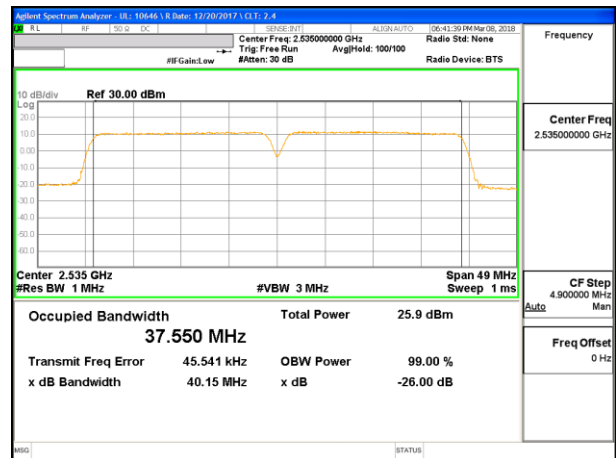

LTE B7 20MHz + 20MHz QPSK RB100-0 + RB100-0

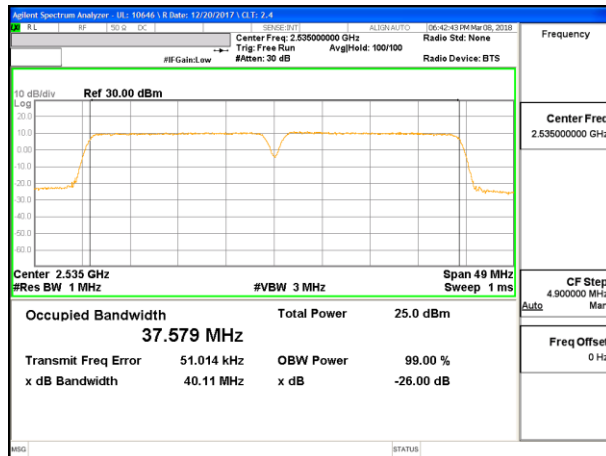

LTE B7 20MHz + 20MHz 16QAM RB100-0 + RB100-0

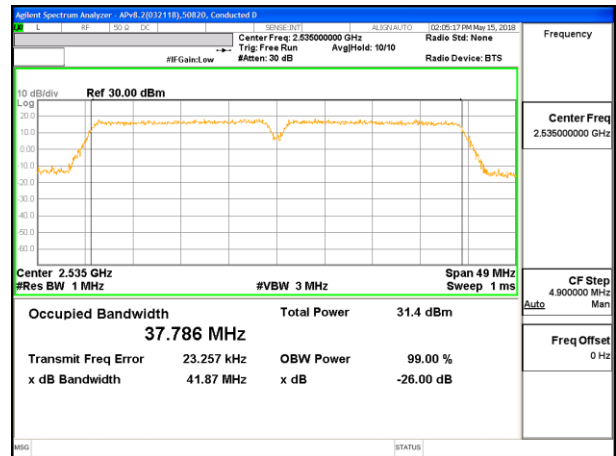

LTE B7 20MHz + 20MHz 64QAM RB100-0 + RB100-0

8.1.2. LTE BAND 41









8.2. EMISSION MASK

RULE PART(S)

§2.1051, §27.53

LIMITS

§27.53(m)(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

TEST PROCEDURE FOR FCC PART 27


(m)(6) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed; for mobile digital stations, in the 1 megahertz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed, except when the 1 megahertz band is 2495-2496 MHz, in which case a resolution bandwidth of at least one percent may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 megahertz or 1 percent of emission bandwidth, as specified; or 1 megahertz or 2 percent for mobile digital stations, except in the band 2495-2496 MHz). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. With respect to television operations, measurements must be made of the separate visual and aural operating powers at sufficiently frequent intervals to ensure compliance with the rules.


MODES TESTED


- LTE Band 7
- LTE Band 41


RESULTS

8.2.1. LTE BAND 7

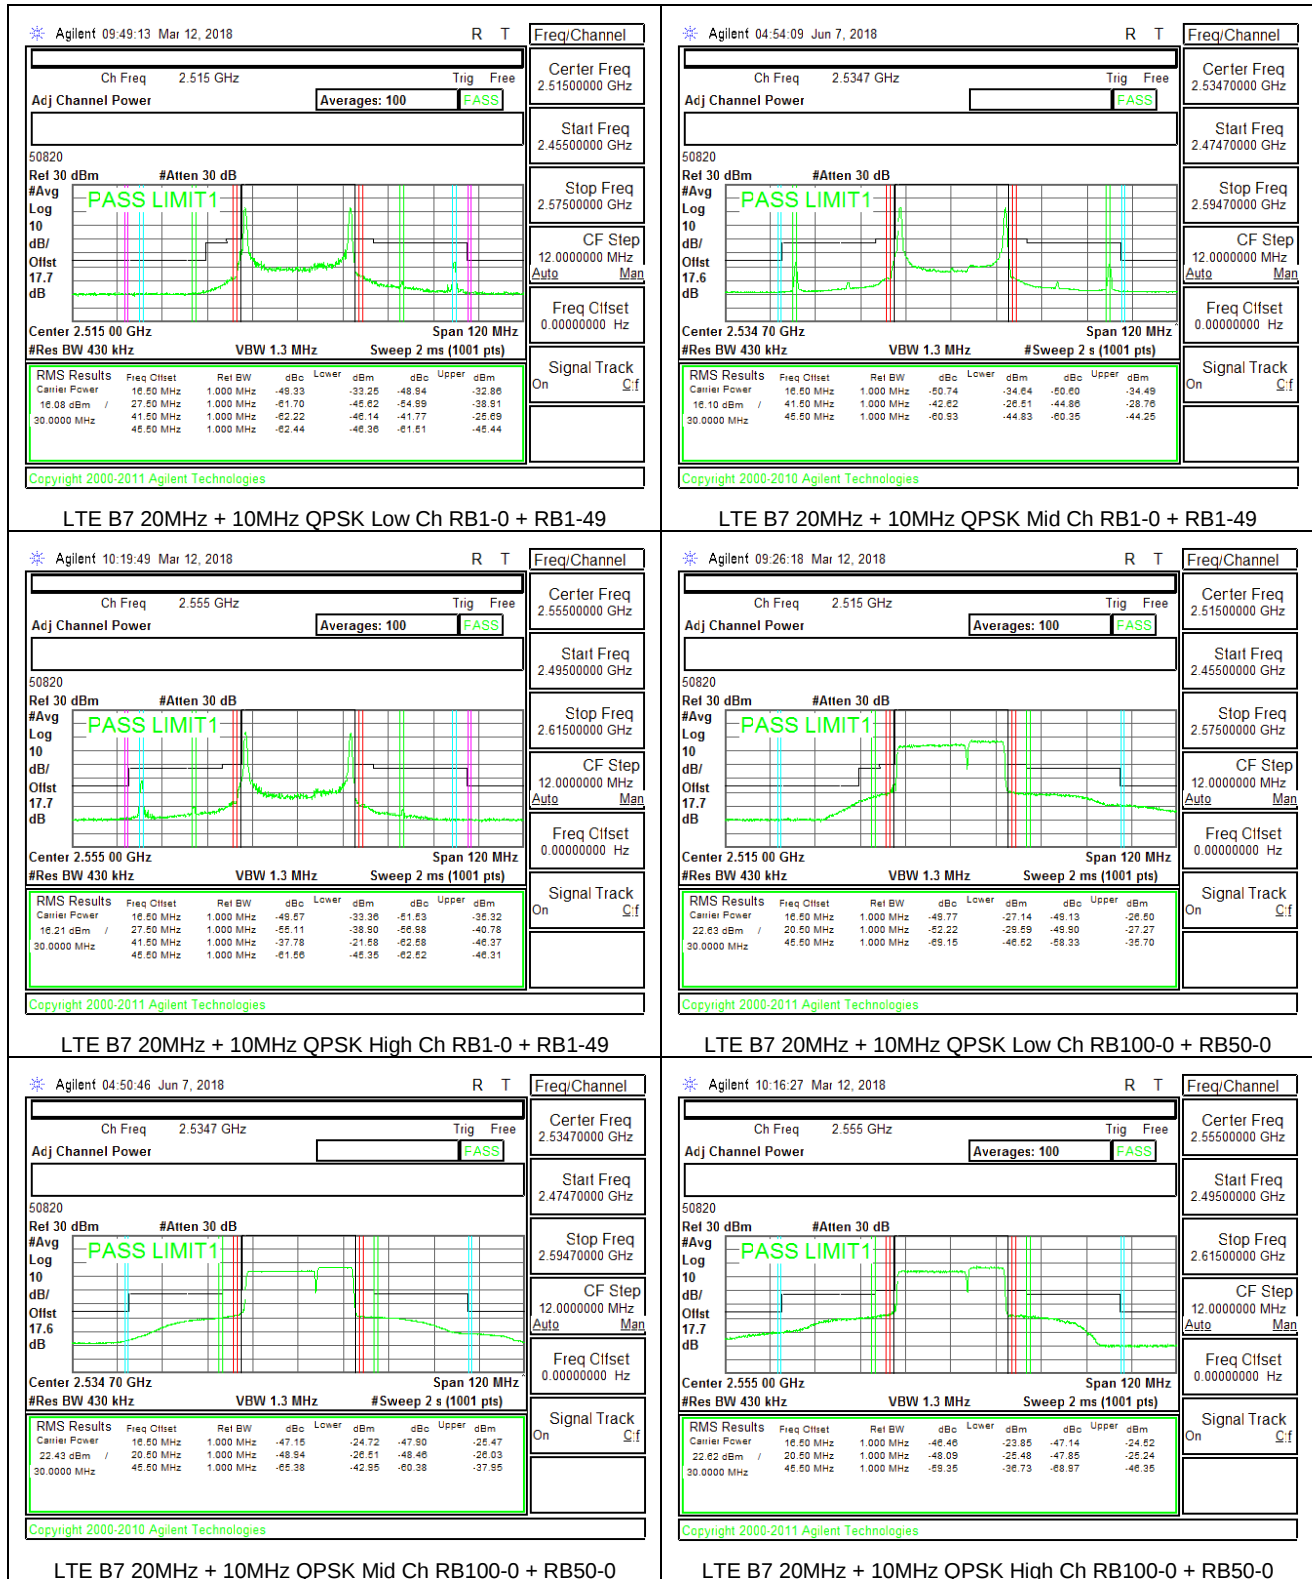


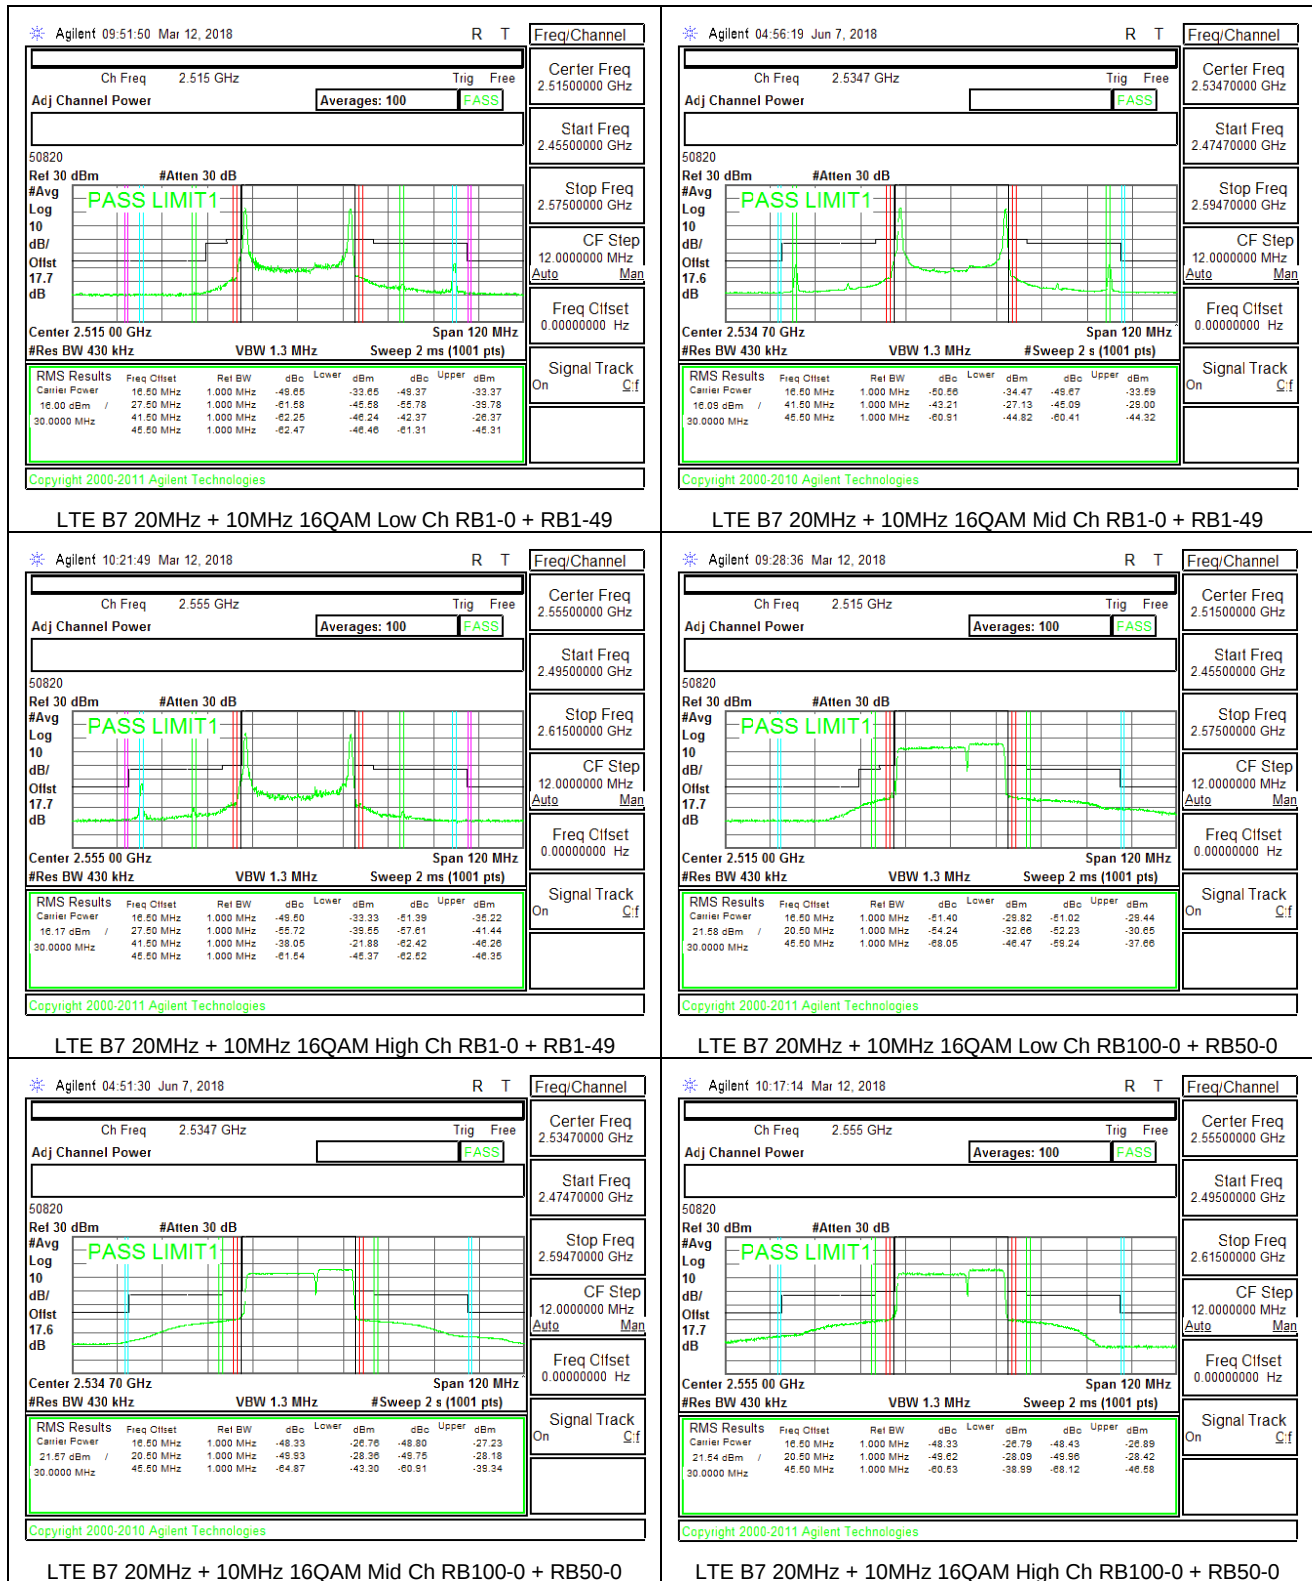


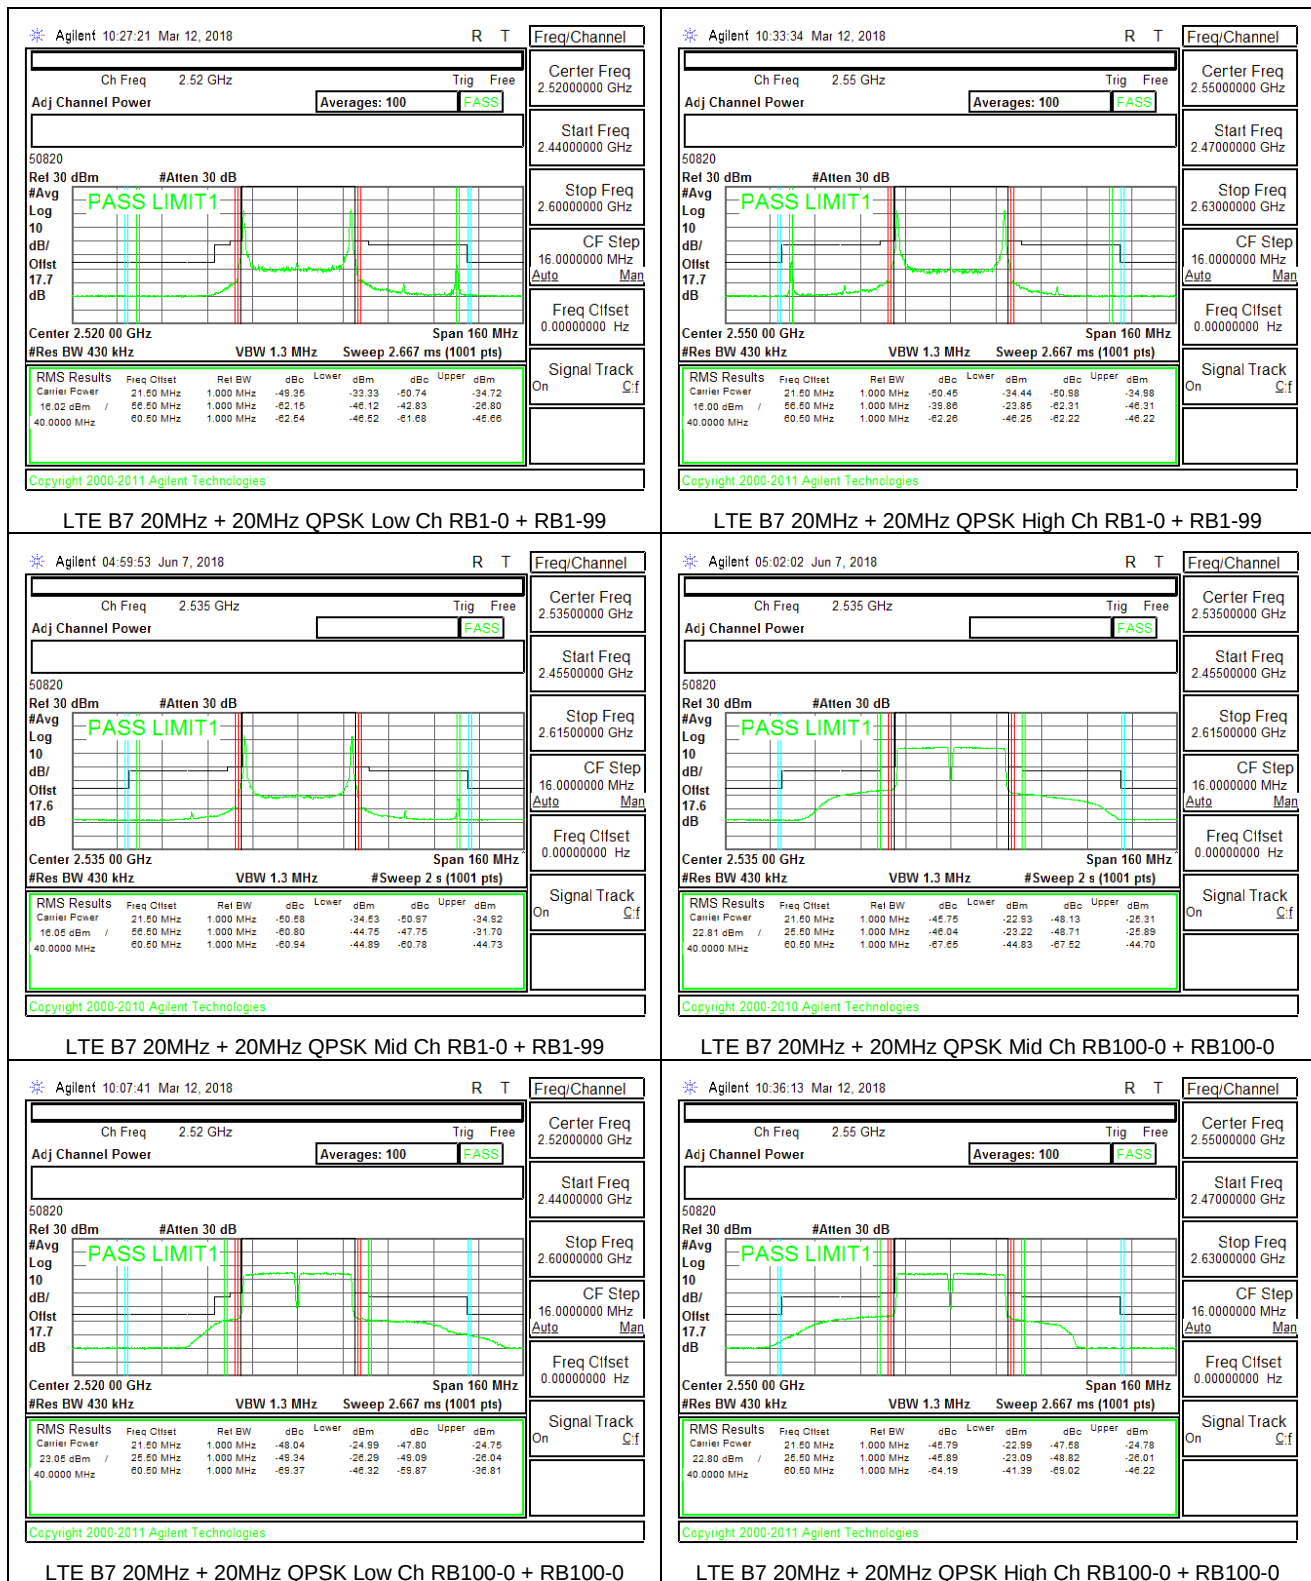


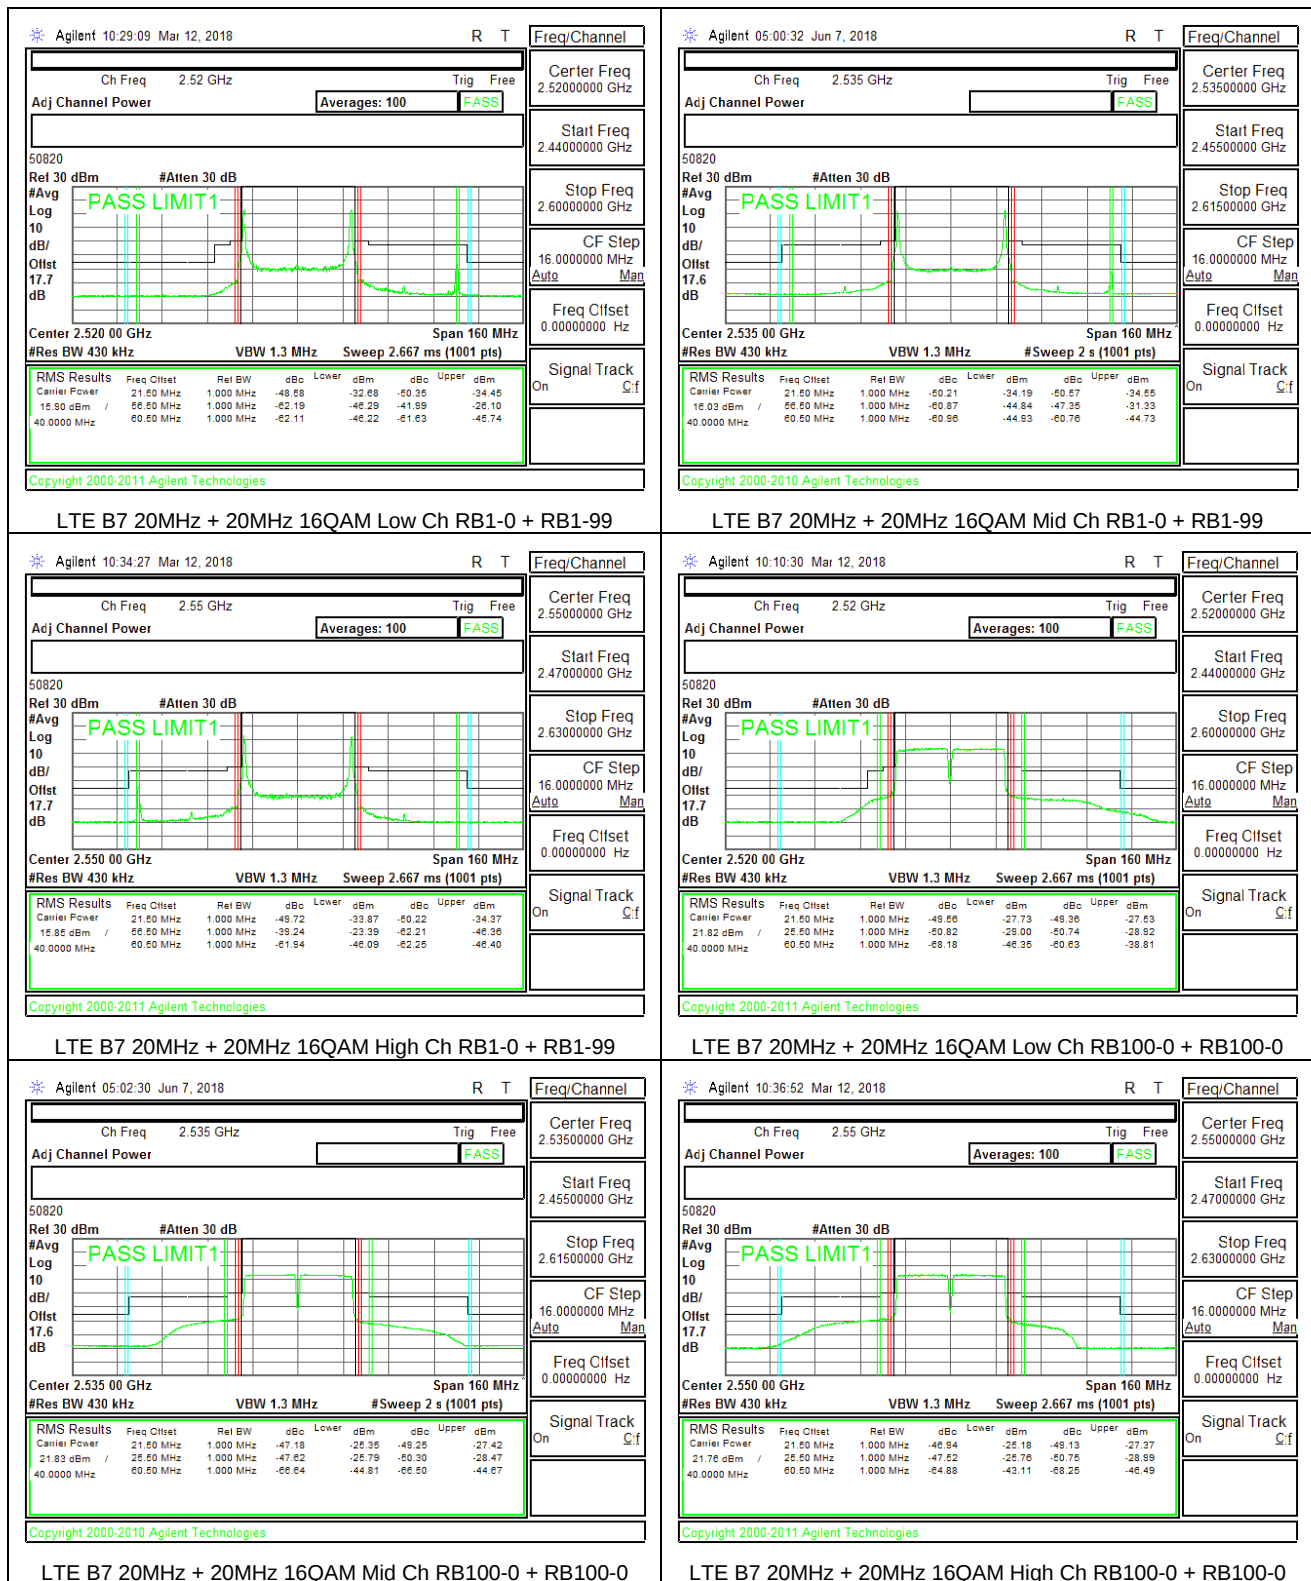


8.2.2. LTE BAND 41

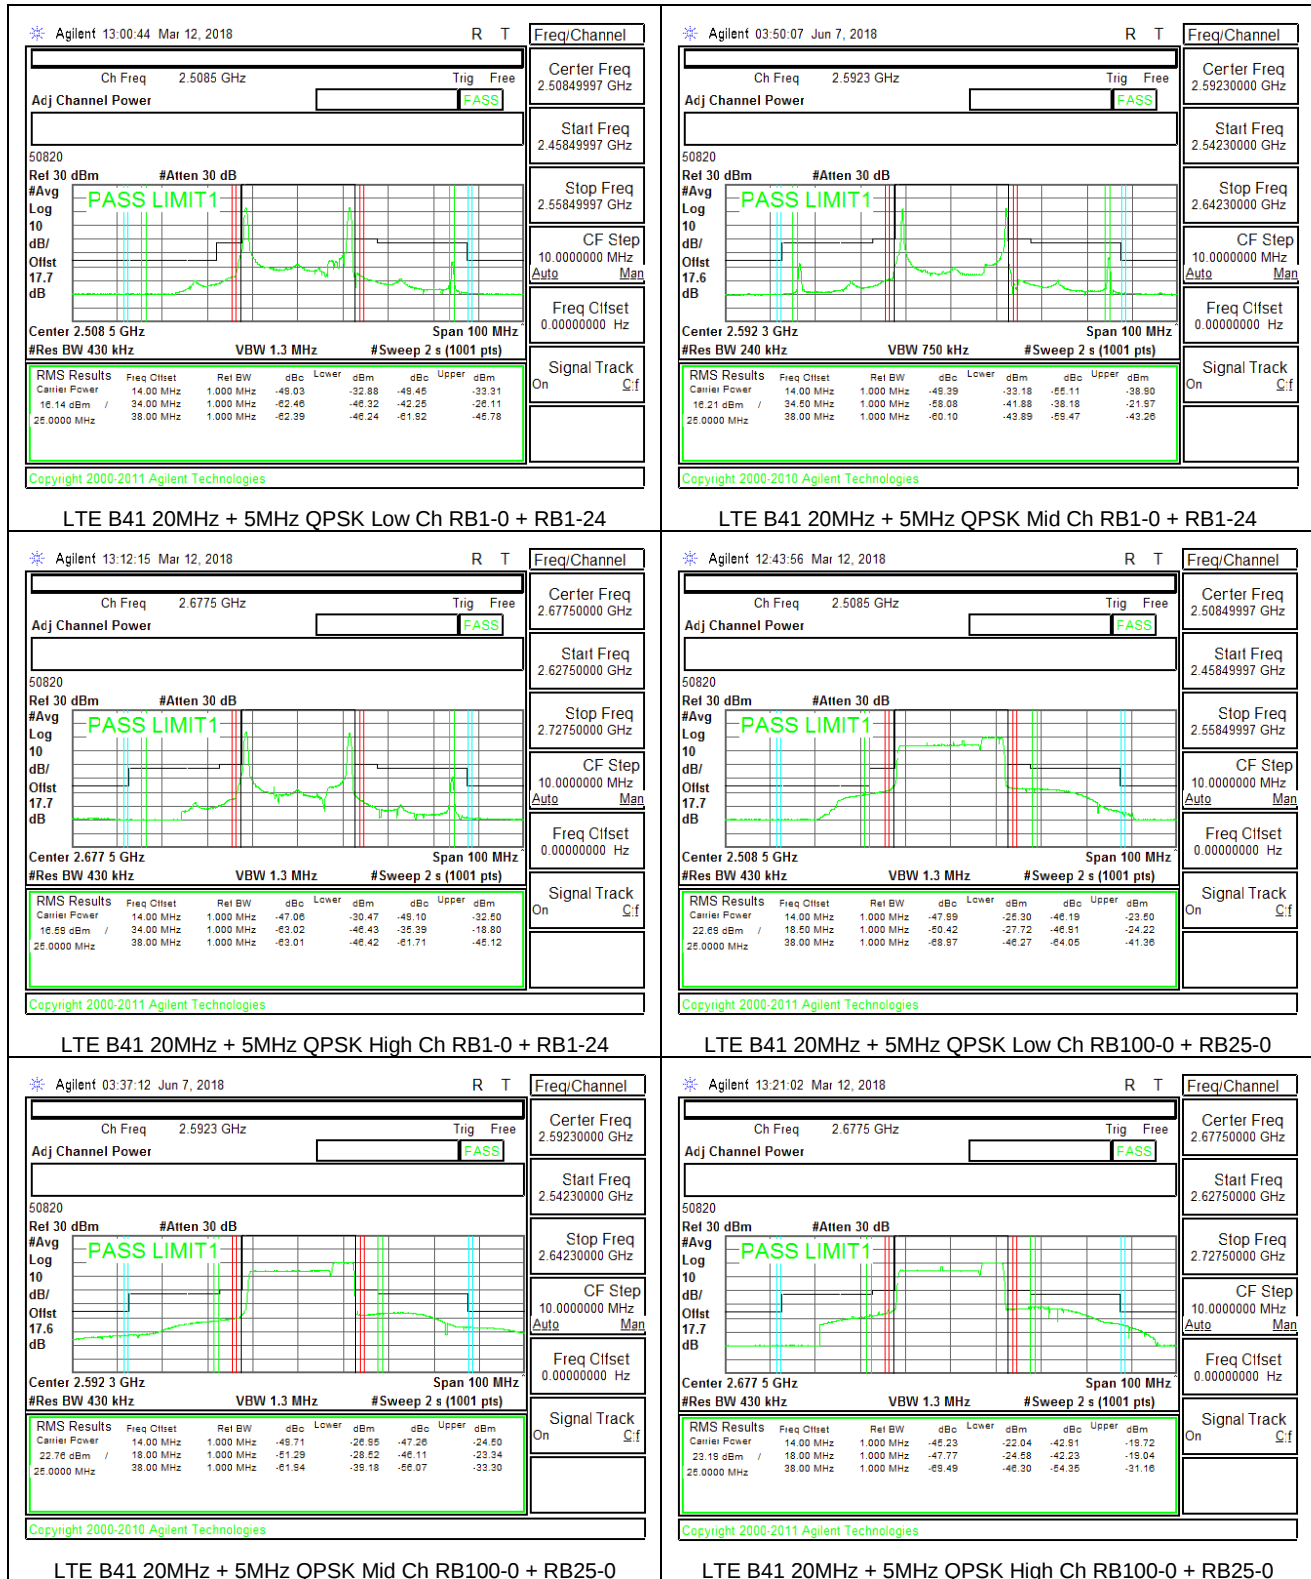

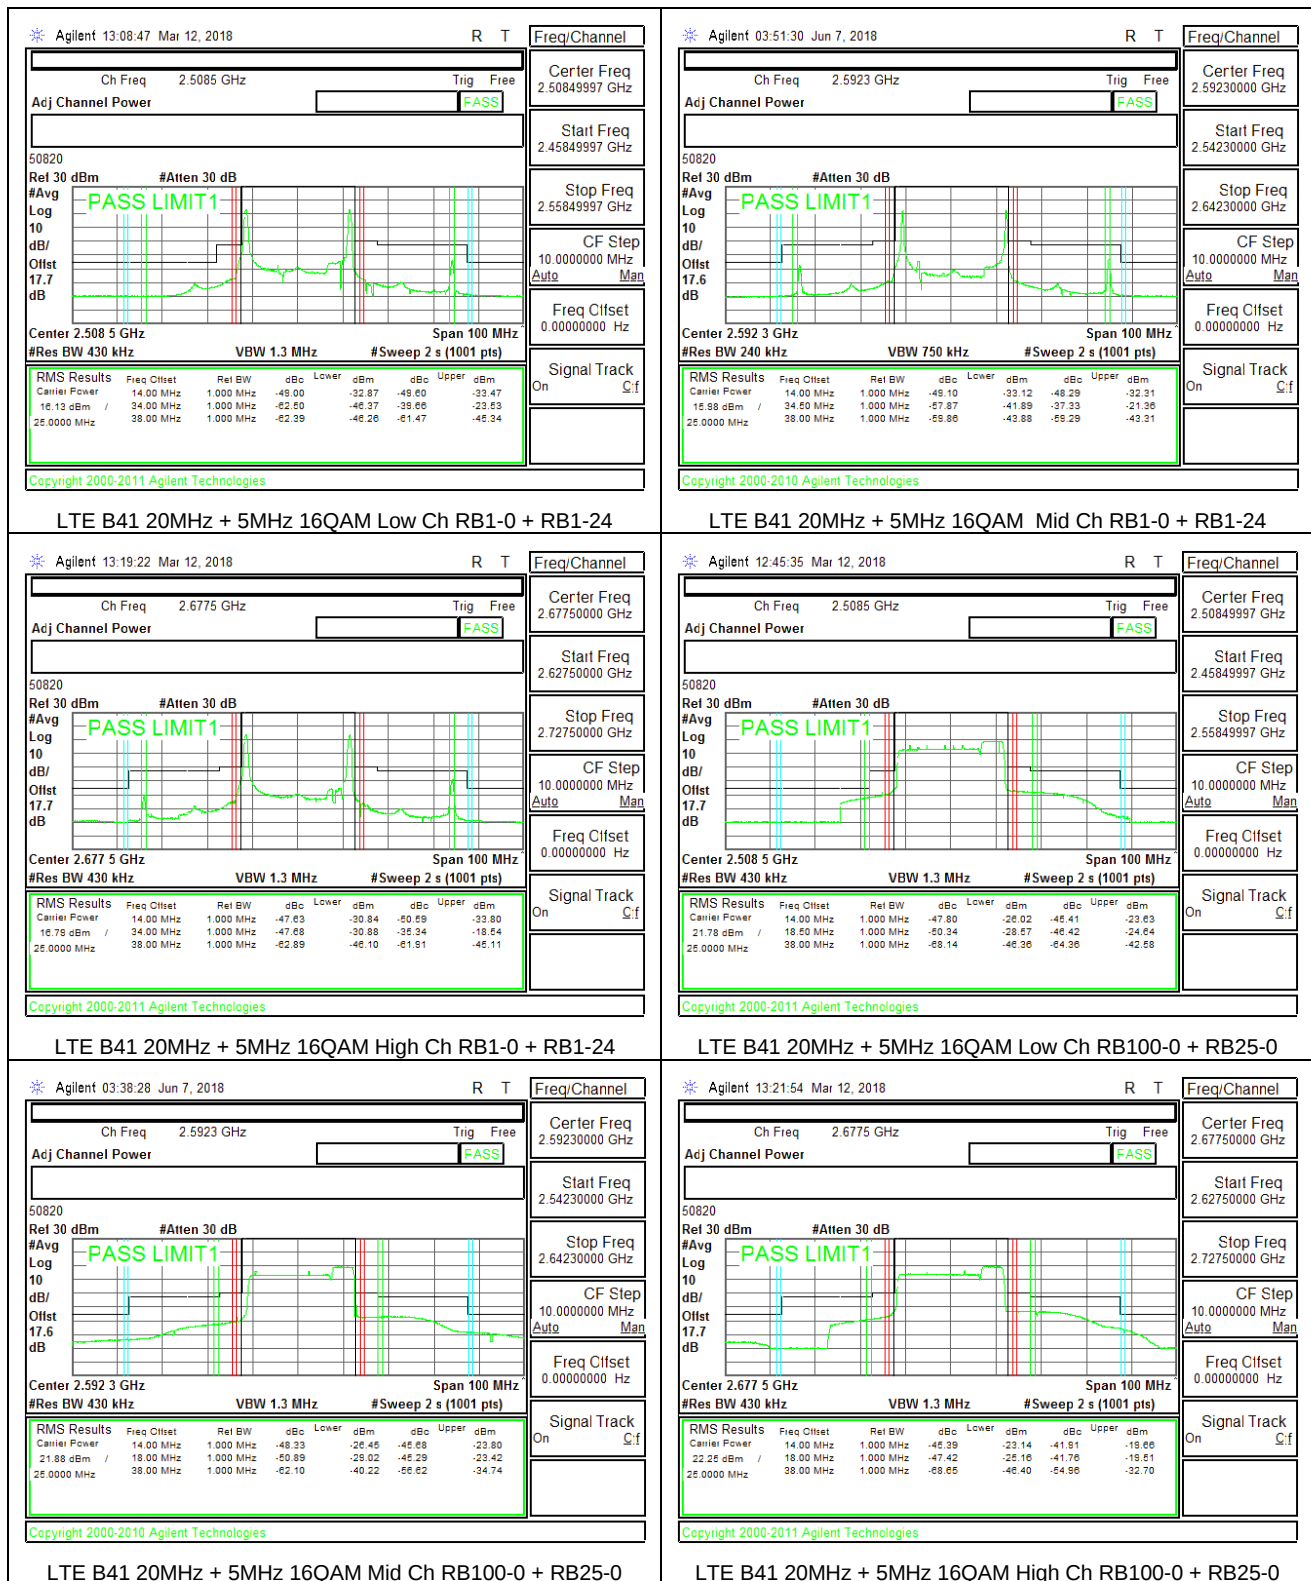

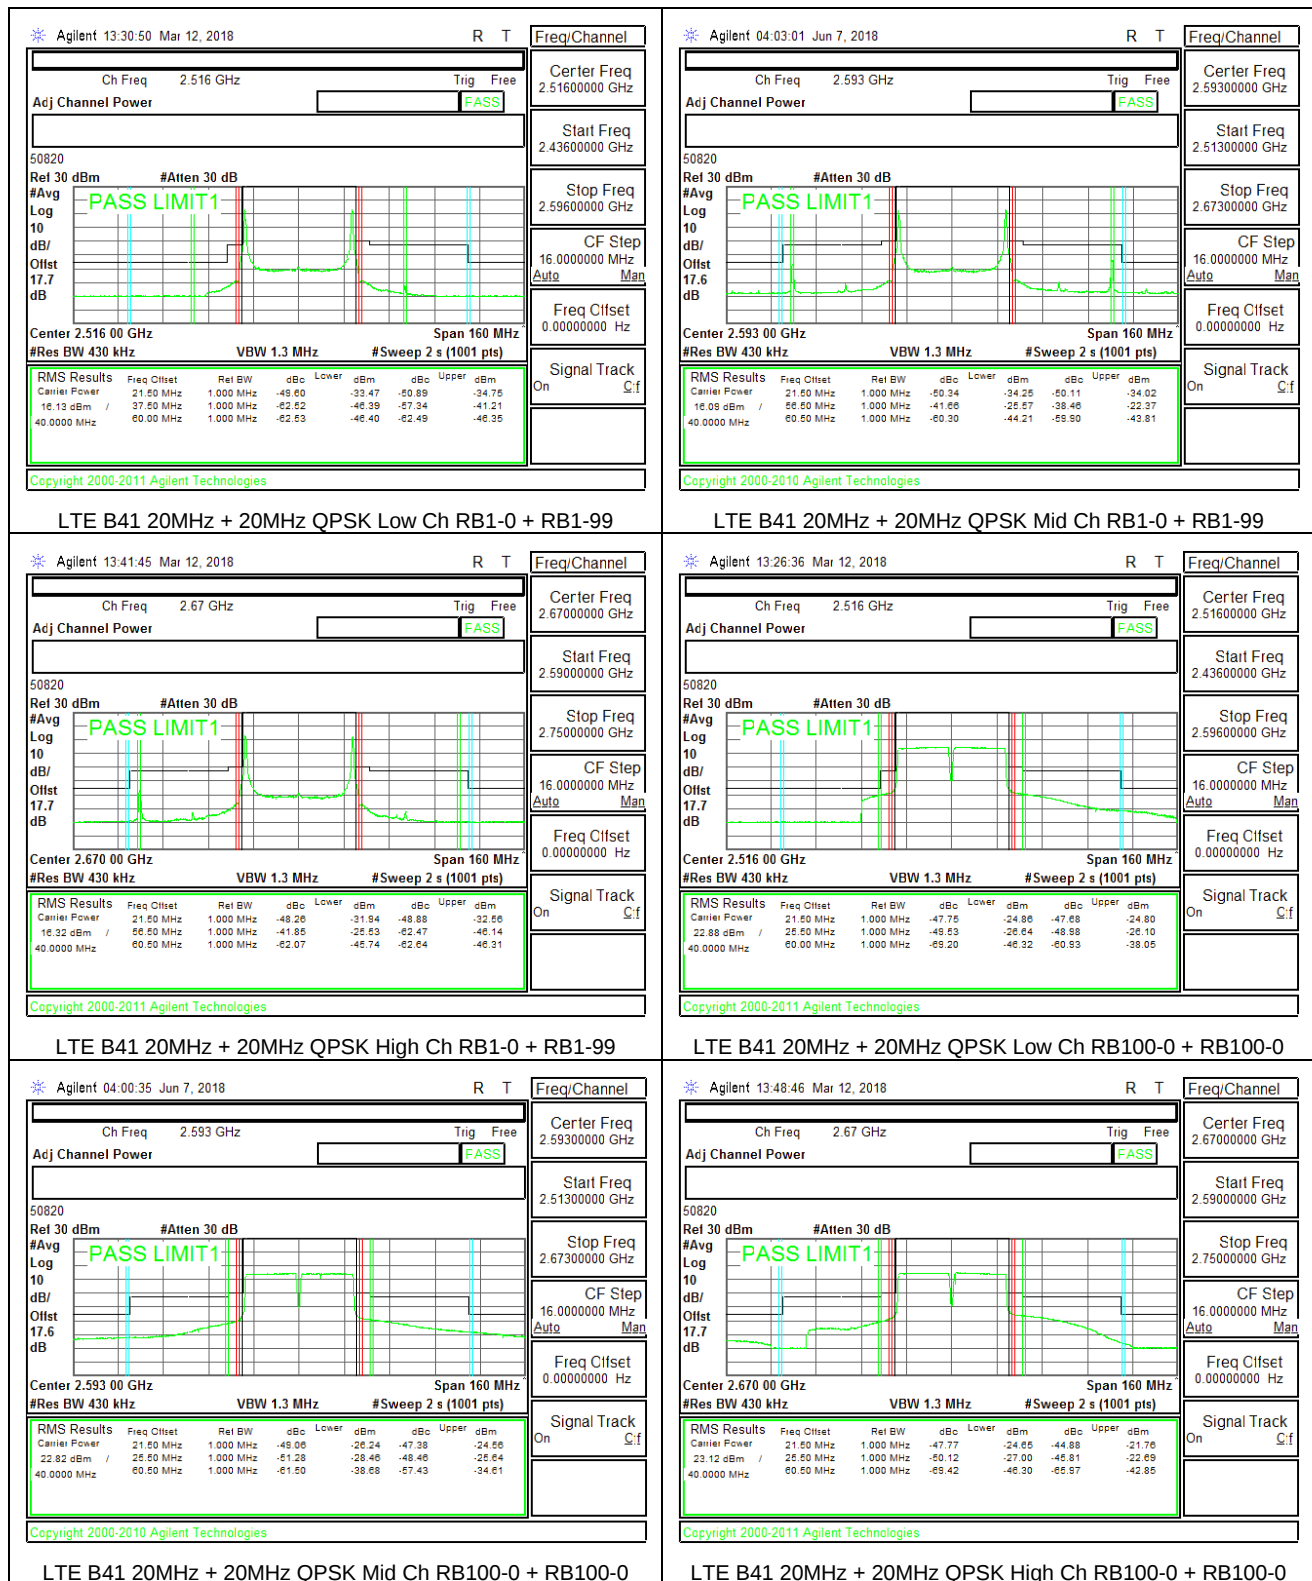

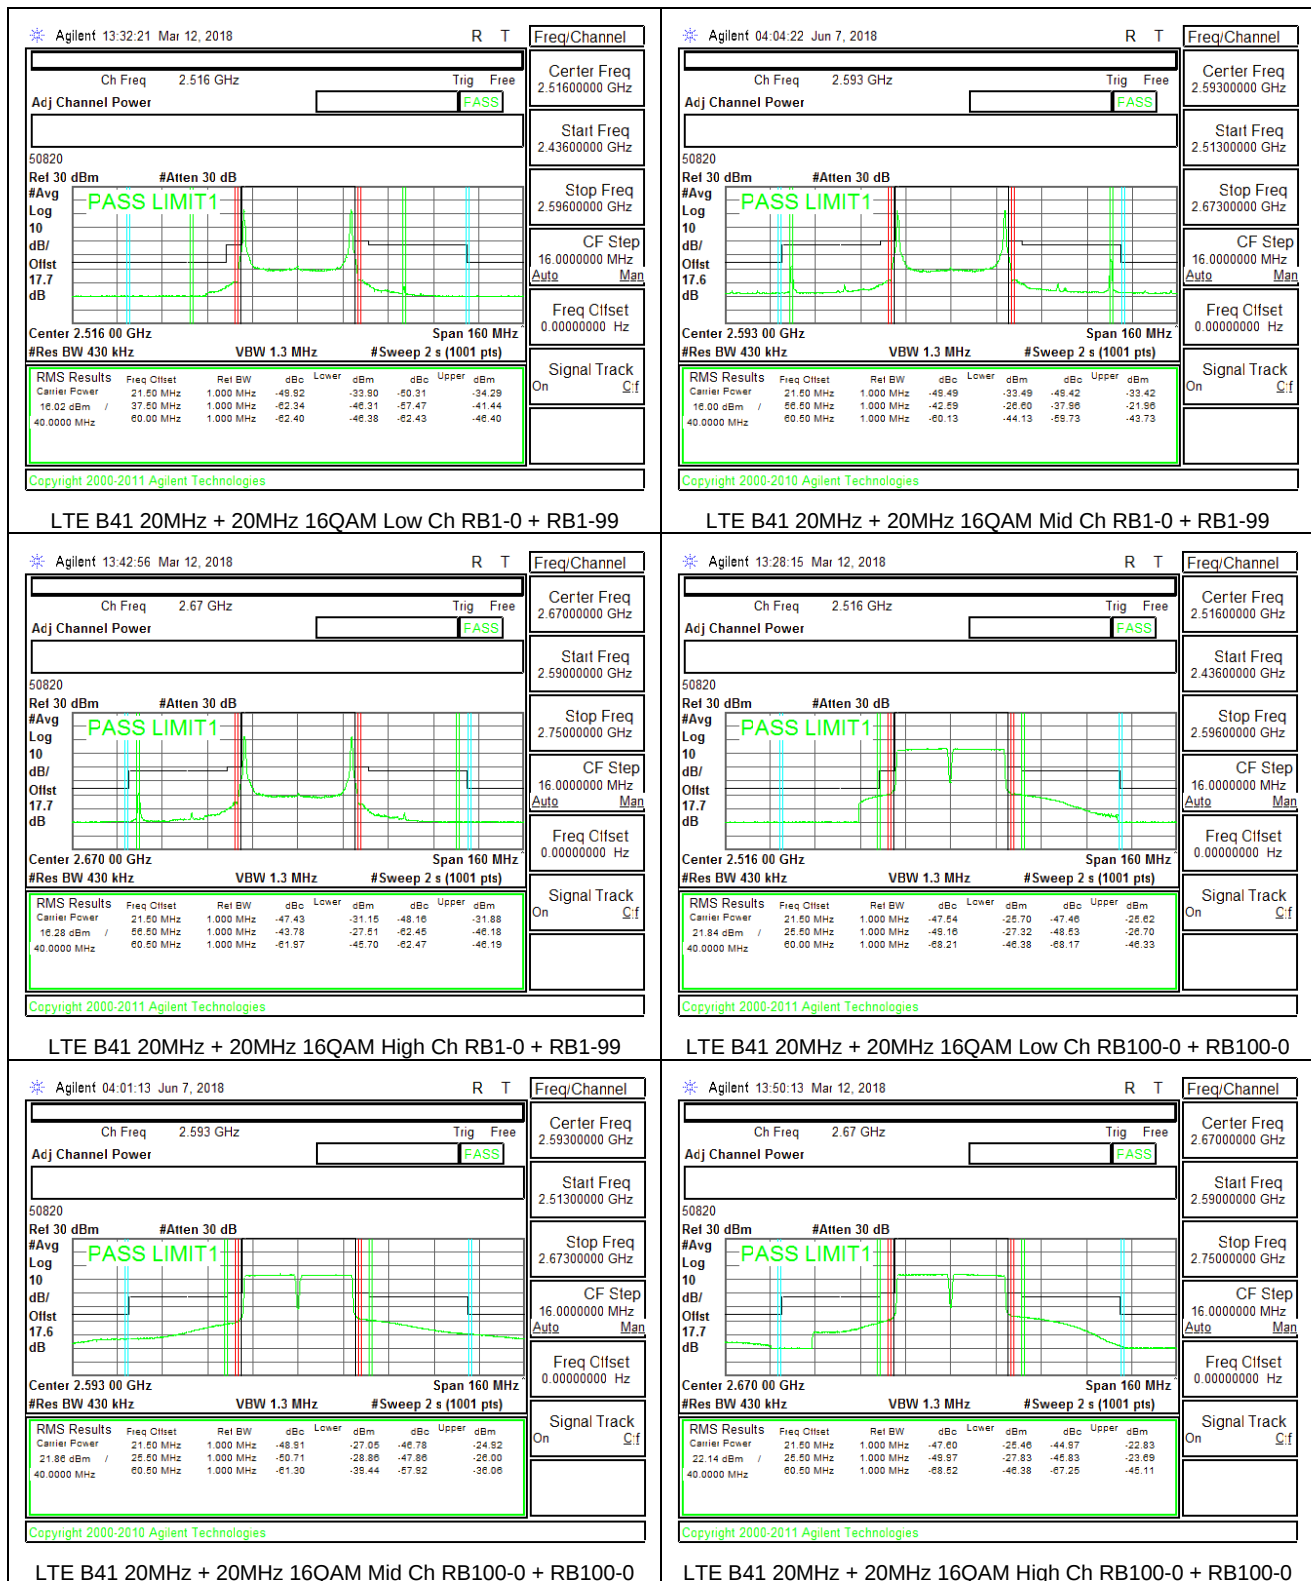

8.3. OUT OF BAND EMISSIONS

RULE PART(S)

§2.1051, §27.53

LIMITS

§27.53 (m)

The minimum permissible attenuation level of any spurious emissions is $55 + 10 \log (P)$ dB where transmitting power (P) in Watts.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.


For each out of band emissions measurement:

- Set display line at -25 dBm
- Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.
(NOTE: Worst case set RBW/VBW to 1MHz/3MHz)


MODES TESTED

- LTE Band 7
- LTE Band 41


8.3.1. ANT 1, LTE BAND 7

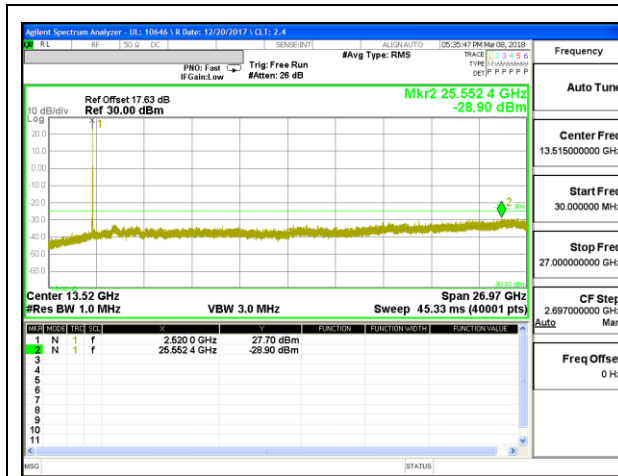


LTE B7 20MHz + 10MHz QPSK Low Ch RB1-99 + RB1-0

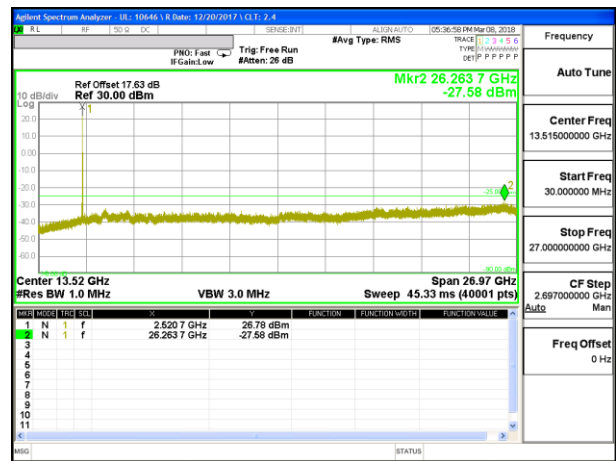


LTE B7 20MHz + 10MHz 16QAM Low Ch RB1-99 + RB1-0

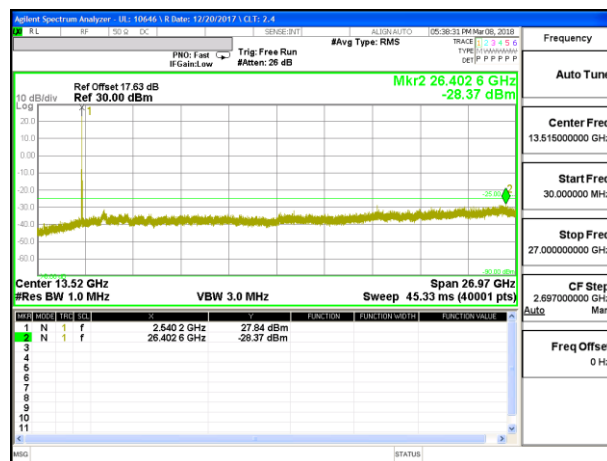


LTE B7 20MHz + 10MHz QPSK Middle Ch RB1-99 + RB1-0

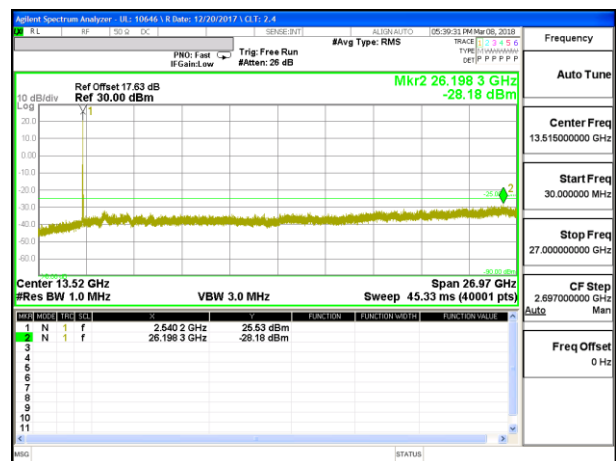


LTE B7 20MHz + 10MHz 16QAM Middle Ch RB1-99 + RB1-0

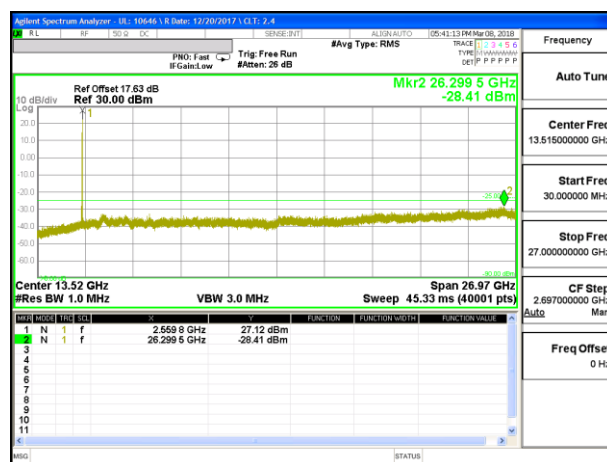


LTE B7 20MHz + 10MHz QPSK High Ch RB1-99 + RB1-0

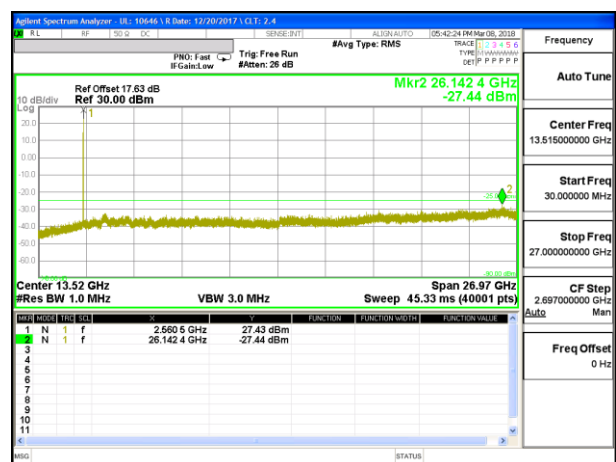


LTE B7 20MHz + 10MHz 16QAM High Ch RB1-99 + RB1-0

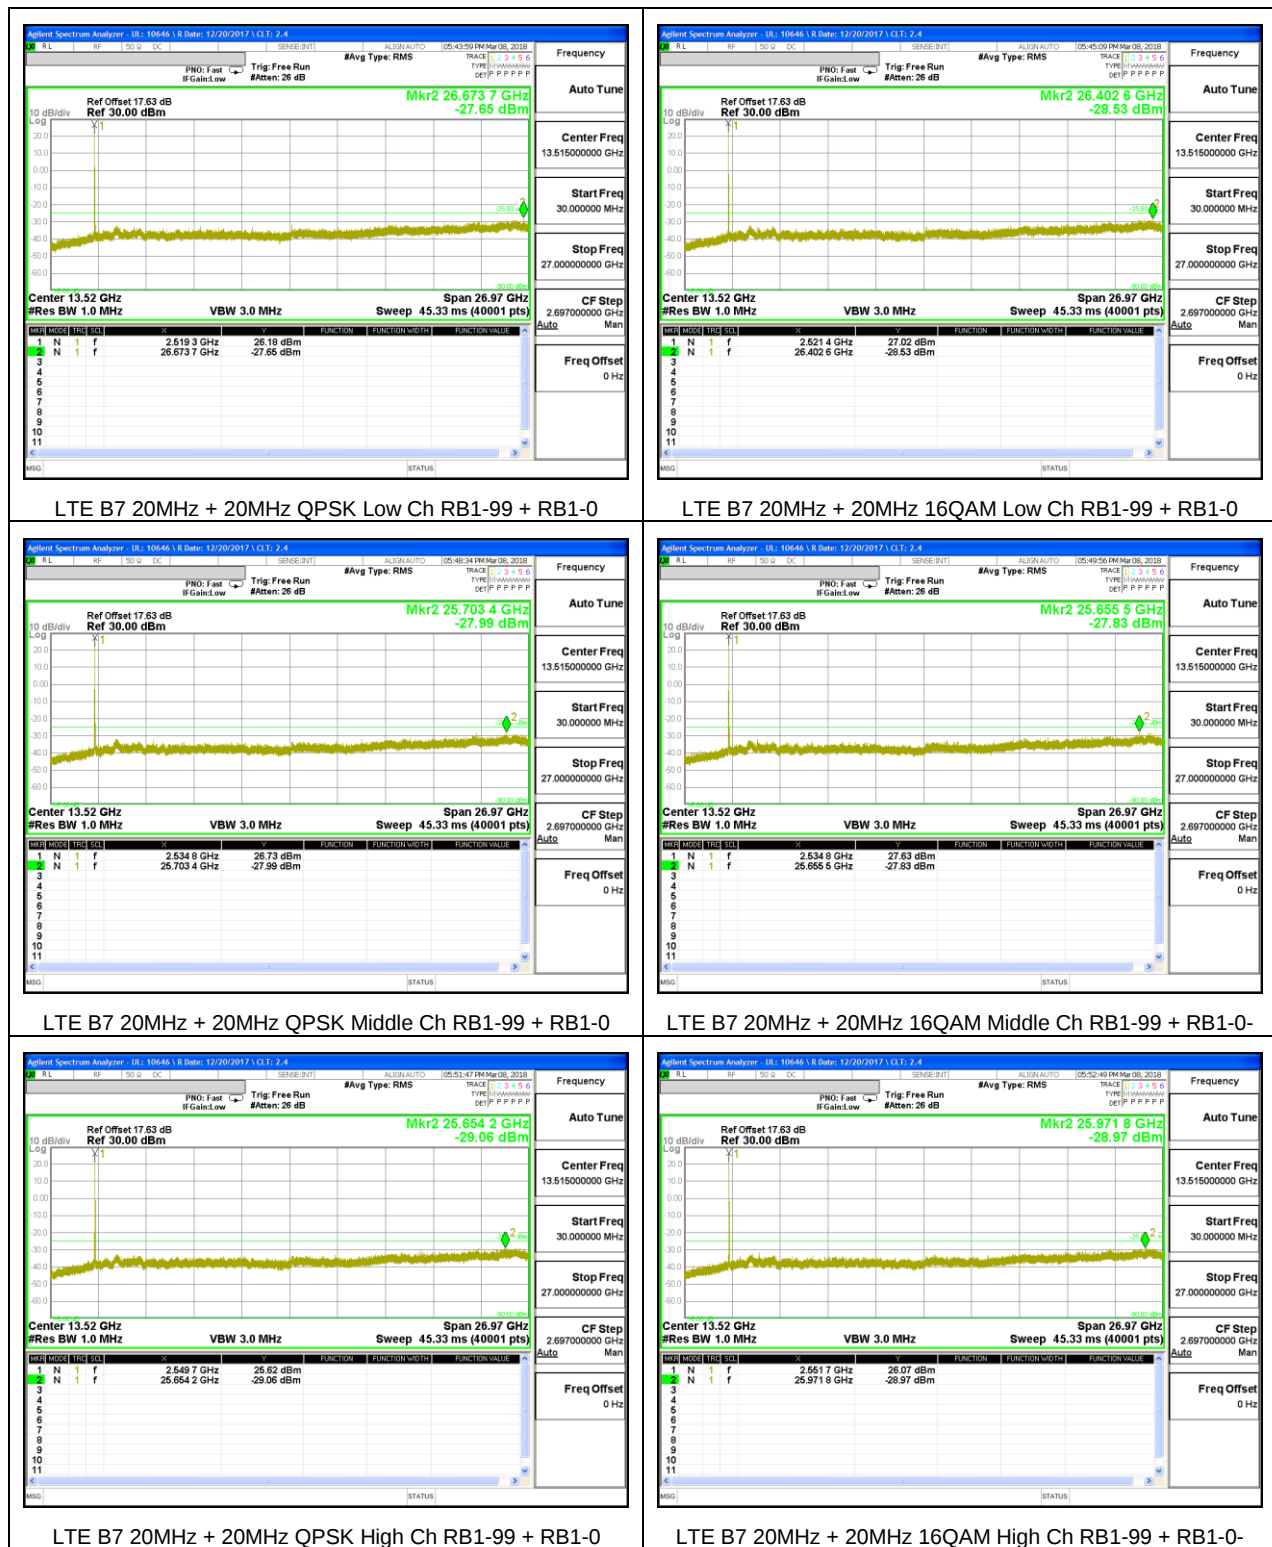

8.3.2. ANT 1, LTE BAND 41

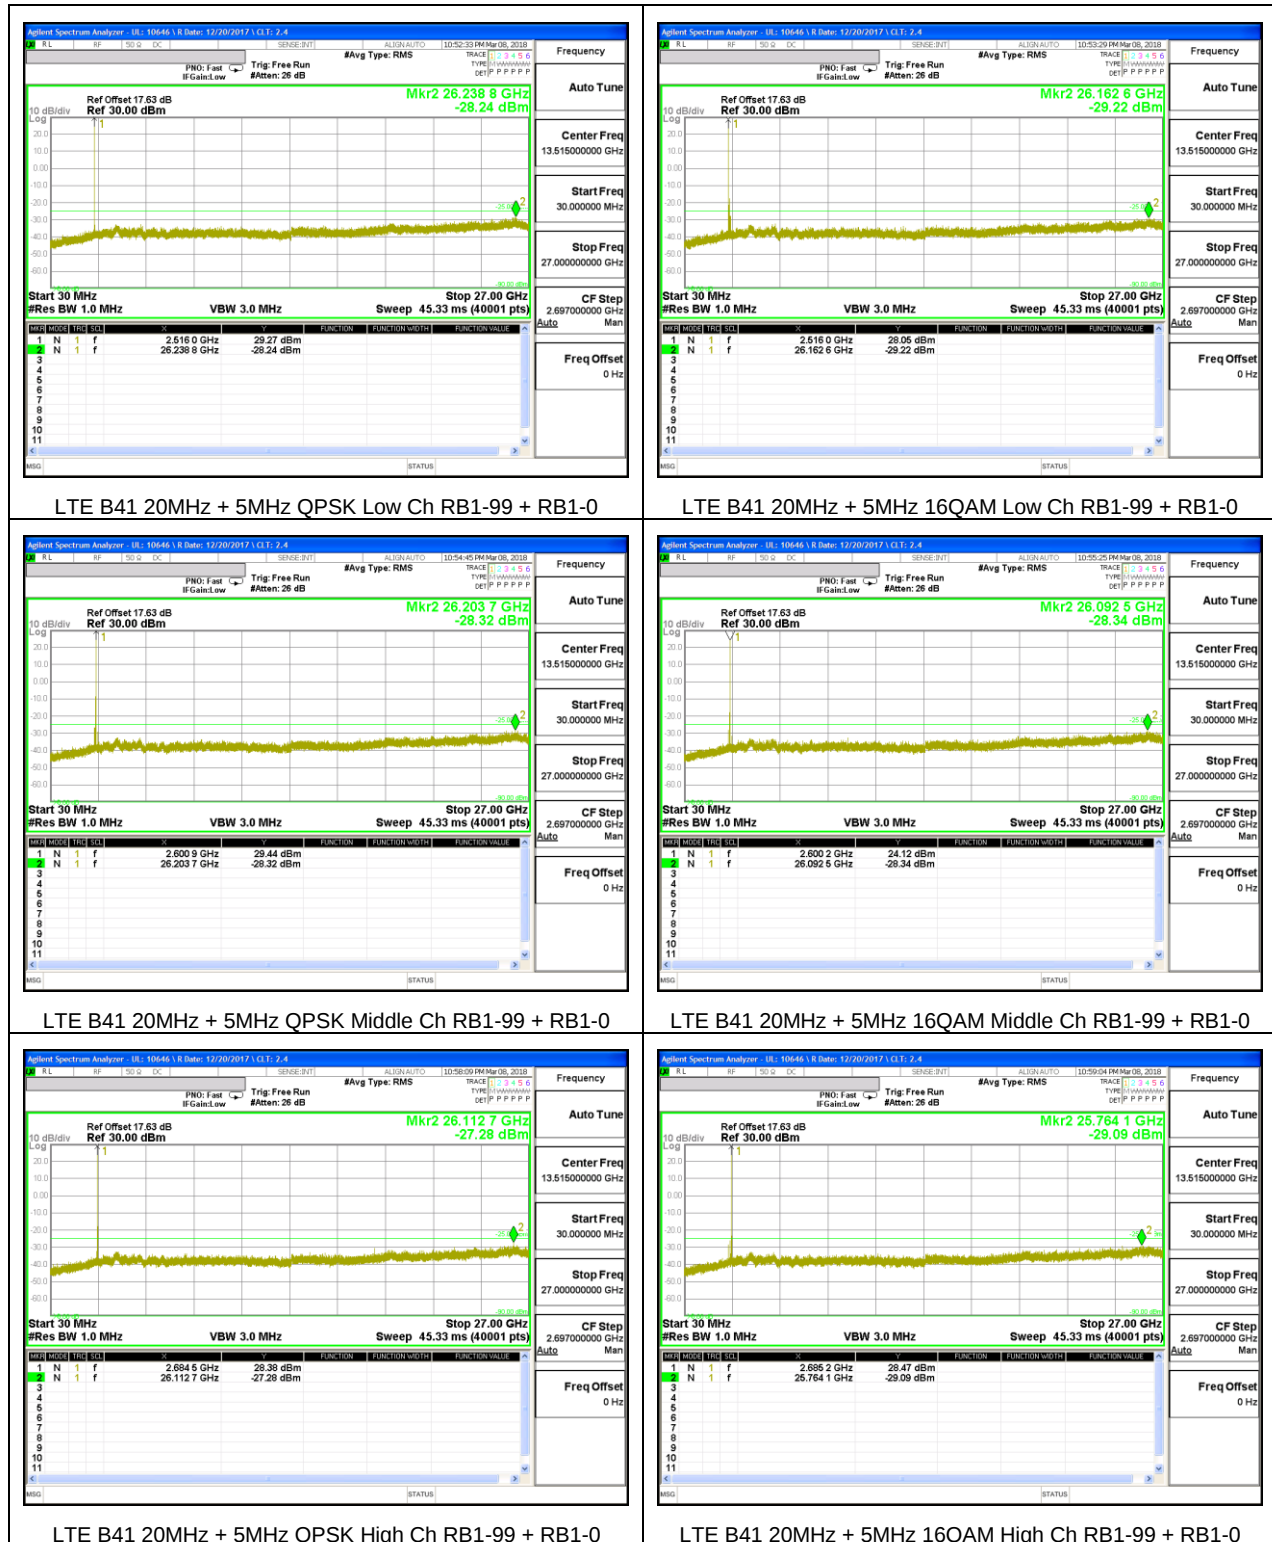

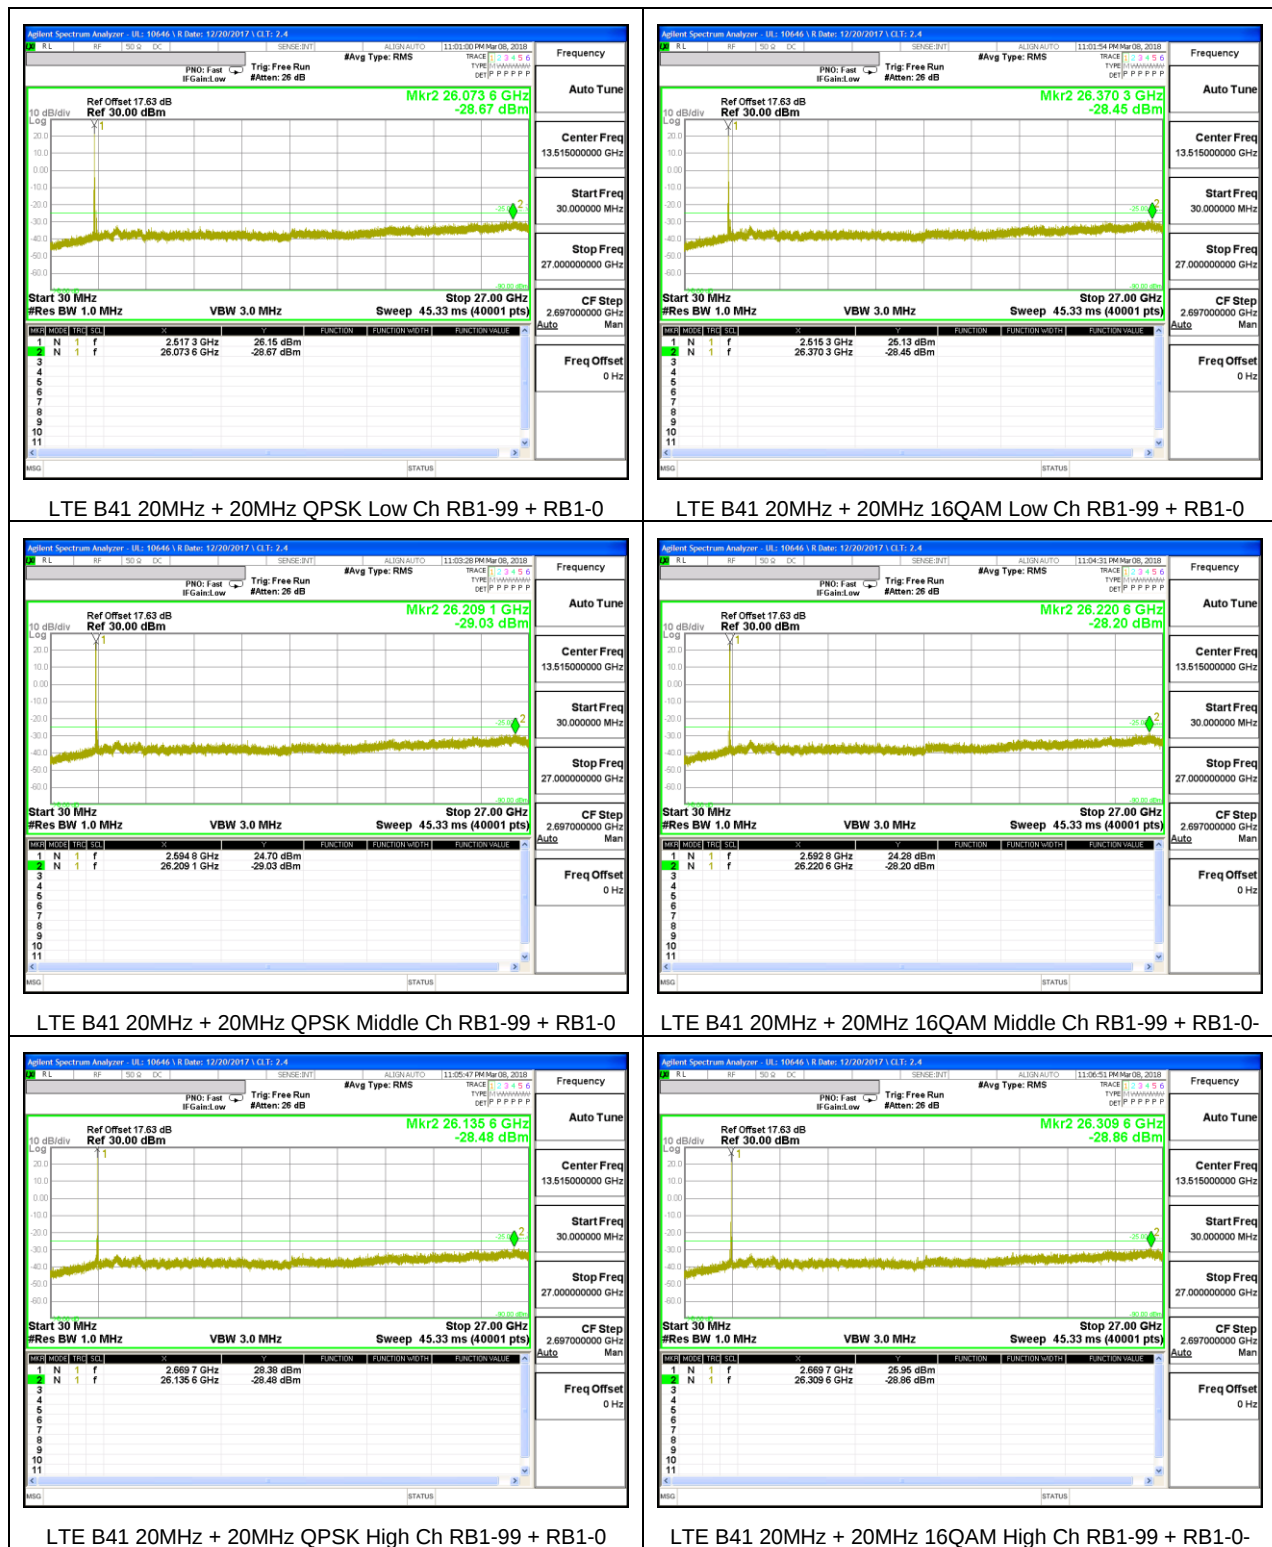

8.4. FREQUENCY STABILITY

RULE PART(S)

§2.1055, §27.54

LIMITS

§27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

- Temp. = -30°C to +50°C

- Voltage = (85% - 115%)

Low voltage, 3.23VDC, Normal, 3.8VDC and High voltage, 4.37VDC.

End Voltage, 3.2VDC.

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to 20°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until +50°C is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

MODES TESTED

- LTE Band 7
- LTE Band 41

RESULTS

See the following pages.

8.4.1. LTE BAND 7

ID:	50893	Date:	3/29/18
------------	-------	--------------	---------

QPSK, (20MHz + 10MHz BANDWIDTH)

Limit		2500	2570	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	2501.1192	2568.9042		
Extreme (50C)		2501.1192	2568.9042	-189.1	-0.075
Extreme (40C)		2501.1192	2568.9042	108.6	0.043
Extreme (30C)		2501.1192	2568.9042	105.8	0.042
Extreme (10C)		2501.1192	2568.9042	74.3	0.029
Extreme (0C)		2501.1192	2568.9042	66.6	0.026
Extreme (-10C)		2501.1192	2568.9042	-189.3	-0.075
Extreme (-20C)		2501.1192	2568.9042	-123.6	-0.049
Extreme (-30C)		2501.1192	2568.9042	148.7	0.059
20C	15%	2501.1192	2568.9042	82.3	0.032
	-15%	2501.1192	2568.9042	84.1	0.033
	End Point	2501.1192	2568.9042	84.7	0.033

QPSK, (20MHz + 20MHz BANDWIDTH)

Limit		2500	2570	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	2501.2100	2568.8987		
Extreme (50C)		2501.2100	2568.8987	-109.0	-0.043
Extreme (40C)		2501.2100	2568.8987	89.7	0.035
Extreme (30C)		2501.2100	2568.8987	106.5	0.042
Extreme (10C)		2501.2100	2568.8987	90.2	0.036
Extreme (0C)		2501.2100	2568.8987	110.2	0.043
Extreme (-10C)		2501.2100	2568.8987	44.5	0.018
Extreme (-20C)		2501.2100	2568.8987	58.7	0.023
Extreme (-30C)		2501.2100	2568.8987	81.7	0.032
20C	15%	2501.2100	2568.8987	75.3	0.030
	-15%	2501.2100	2568.8987	77.8	0.031
	End Point	2501.2100	2568.8987	77.4	0.031

8.4.2. LTE BAND 41

ID:	44353	Date:	3/23/18
------------	-------	--------------	---------

QPSK, (20MHz + 5MHz BANDWIDTH)

Limit		2496	2690	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	2497.0095	2689.4087		
Extreme (50C)		2497.0095	2689.4087	36.7	0.014
Extreme (40C)		2497.0095	2689.4087	45.9	0.018
Extreme (30C)		2497.0095	2689.4087	93.0	0.036
Extreme (10C)		2497.0095	2689.4087	28.0	0.011
Extreme (0C)		2497.0095	2689.4087	-29.8	-0.012
Extreme (-10C)		2497.0095	2689.4087	-28.3	-0.011
Extreme (-20C)		2497.0095	2689.4087	25.1	0.010
Extreme (-30C)		2497.0095	2689.4087	34.7	0.013
20C	15%	2497.0095	2689.4087	88.2	0.034
	-15%	2497.0095	2689.4087	85.7	0.033
	End Point	2497.0095	2689.4087	85.1	0.033

QPSK, (20MHz + 20MHz BANDWIDTH)

Limit		2496	2690	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	2496.8471	2688.9075		
Extreme (50C)		2496.8471	2688.9075	49.5	0.019
Extreme (40C)		2496.8471	2688.9075	43.2	0.017
Extreme (30C)		2496.8471	2688.9075	17.6	0.007
Extreme (10C)		2496.8471	2688.9075	-17.1	-0.007
Extreme (0C)		2496.8471	2688.9075	-20.2	-0.008
Extreme (-10C)		2496.8471	2688.9075	-23.9	-0.009
Extreme (-20C)		2496.8471	2688.9075	24.1	0.009
Extreme (-30C)		2496.8471	2688.9075	36.5	0.014
20C	15%	2496.8471	2688.9075	20.2	0.008
	-15%	2496.8471	2688.9075	22.1	0.009
	End Point	2496.8471	2688.9075	22.8	0.009