1TX Antenna 3 MODE


0.00 Included in Calculations of Corr'd PSD **Duty Cycle CF (dB) PSD Results**

Channel	Frequency	Antenna 3	Total	Limit	Margin
		Meas	Corr'd		
	(MHz)		PSD		
		(dBm/	(dBm/	(dBm/	
		3kHz)	3kHz)	3kHz)	(dB)
Low 1	2412	-6.82	-6.82	8.0	-14.8
Low 2	2417	-5.62	-5.62	8.0	-13.6
Low 3	2422	-4.33	-4.33	8.0	-12.3
Mid 6	2437	-4.38	-4.38	8.0	-12.4
High 9	2452	-4.46	-4.46	8.0	-12.5
High 10	2457	-5.71	-5.71	8.0	-13.7
High 11	2462	-6.83	-6.83	8.0	-14.8
High 12	2467	-10.41	-10.41	8.0	-18.4
High 13	2472	-16.68	-16.68	8.0	-24.7

DATE: 8/13/2018

IC:579C-E3235A



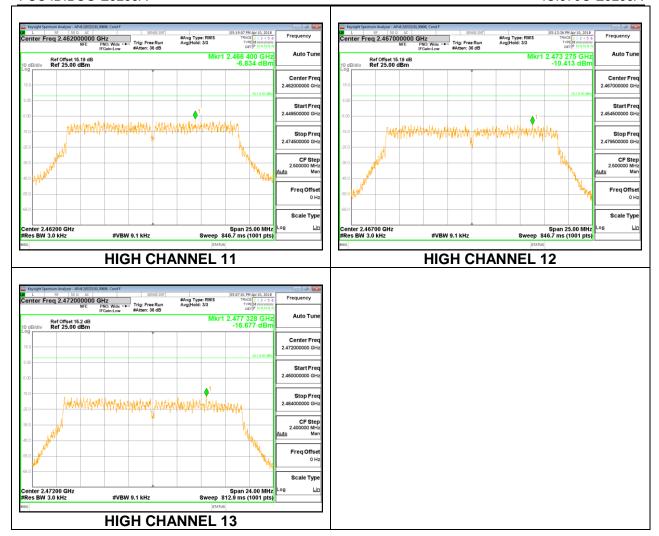


8.5.3. 2TX Antenna 4 + Antenna 3 CDD MODE


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
PSD Results		

Channel	Frequency	Ant 4	Ant 3	Total	Limit	Margin
		Meas	Meas	Corr'd PSD		
	(MHz)	(dBm/	(dBm/	(dBm/	(dBm/	(45)
		3kHz)	3kHz)	3kHz)	3kHz)	(dB)
Low 1	2412	-7.86	-7.80	-4.82	8.0	-12.8
Low 2	2417	-6.30	-6.40	-3.34	8.0	-11.3
Low 3	2422	-5.37	-5.31	-2.33	8.0	-10.3
Low 4	2427	-4.44	-4.47	-1.45	8.0	-9.4
Mid 6	2437	-4.47	-4.31	-1.38	8.0	-9.4
High 8	2447	-4.31	-4.48	-1.39	8.0	-9.4
High 9	2452	-5.43	-5.37	-2.39	8.0	-10.4
High 10	2457	-6.23	-6.30	-3.25	8.0	-11.3
High 11	2462	-7.86	-7.74	-4.79	8.0	-12.8
High 12	2467	-11.50	-11.48	-8.48	8.0	-16.5
High 13	2472	-17.77	-17.69	-14.72	8.0	-22.7


LOW CHANNEL 1

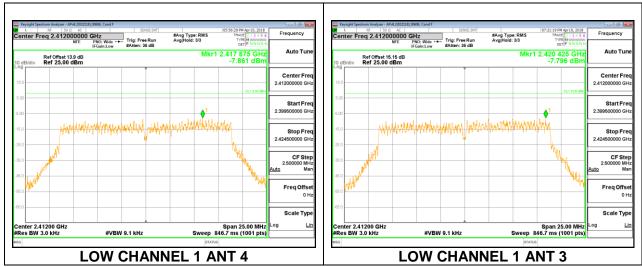


LOW CHANNEL 2

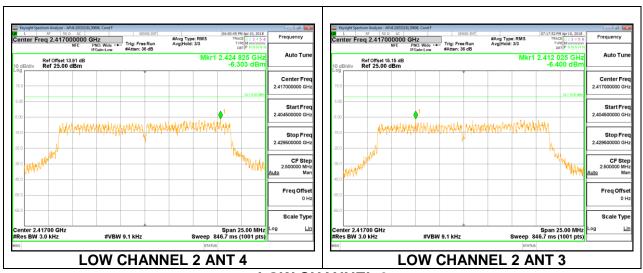


LOW CHANNEL 3

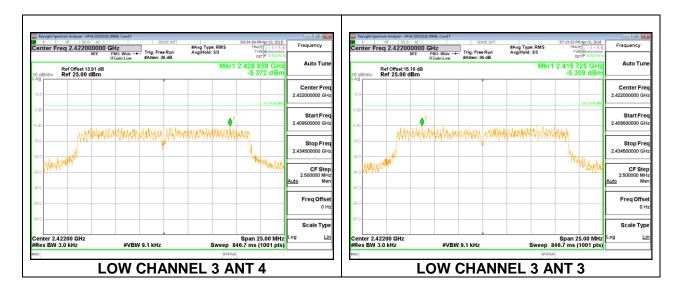


LOW CHANNEL 4

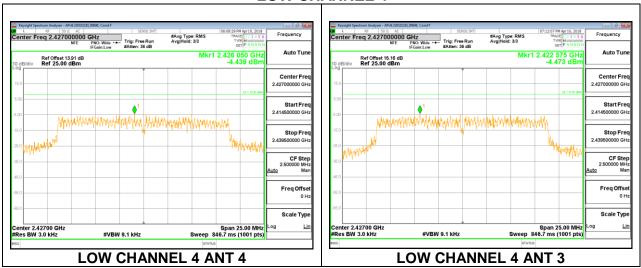

MID CHANNEL 6

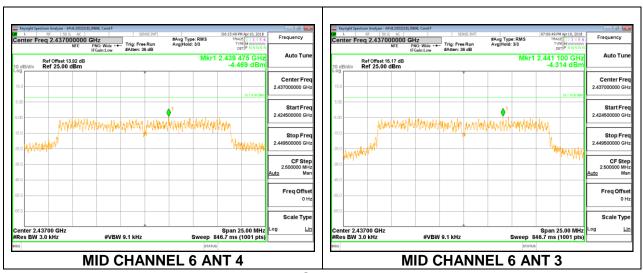


HIGH CHANNEL 8

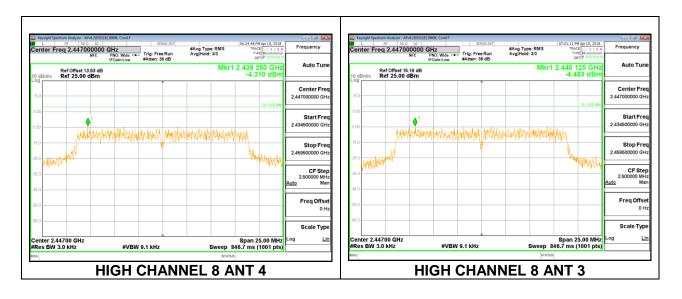


Page 68 of 190


HIGH CHANNEL 9

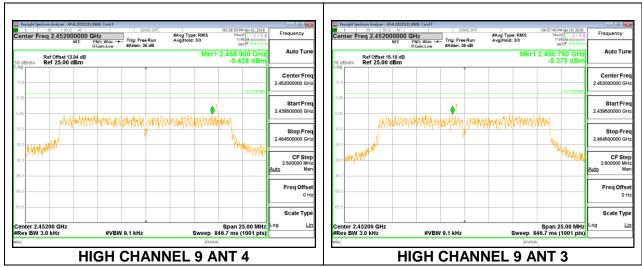


HIGH CHANNEL 10

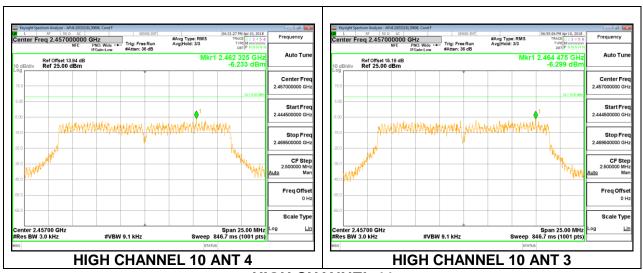


HIGH CHANNEL 11

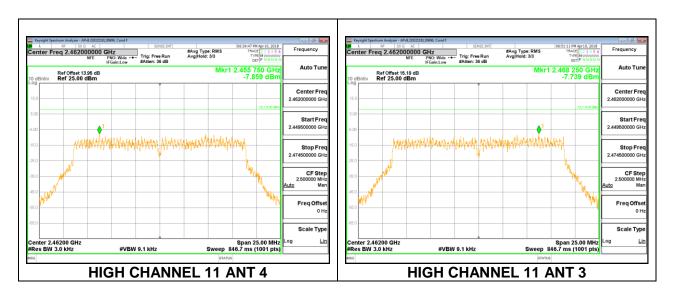

HIGH CHANNEL 12

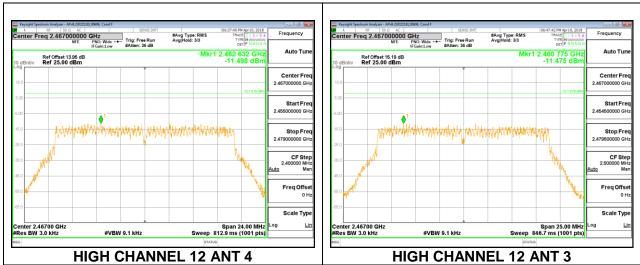

HIGH CHANNEL 13

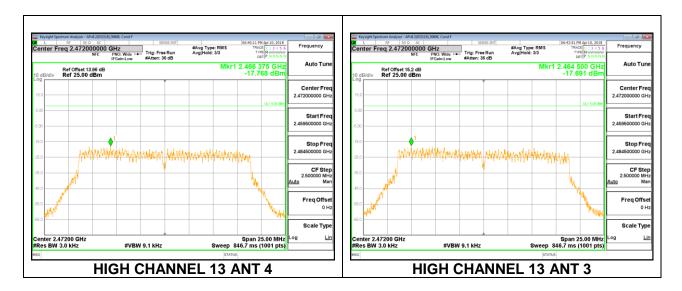

8.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

RSS-247 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer with RBW = 100 kHz, VBW = 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, bandedge (where measurements to the general radiated limits will not be made) and out-of-band emissions

RESULTS


Page 71 of 190


DATE: 8/13/2018

IC:579C-E3235A


8.6.1. 802.11b MODE


1TX Antenna 4 MODE

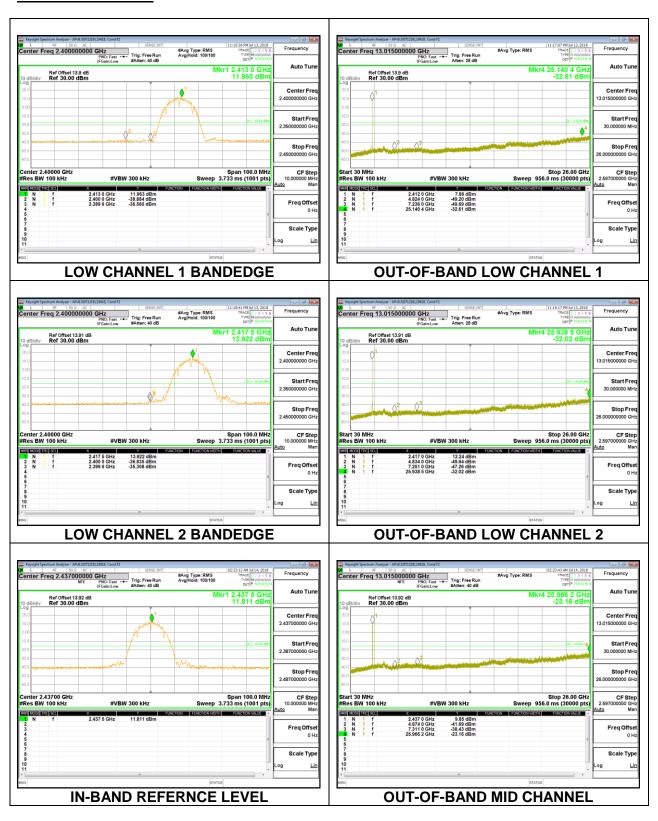

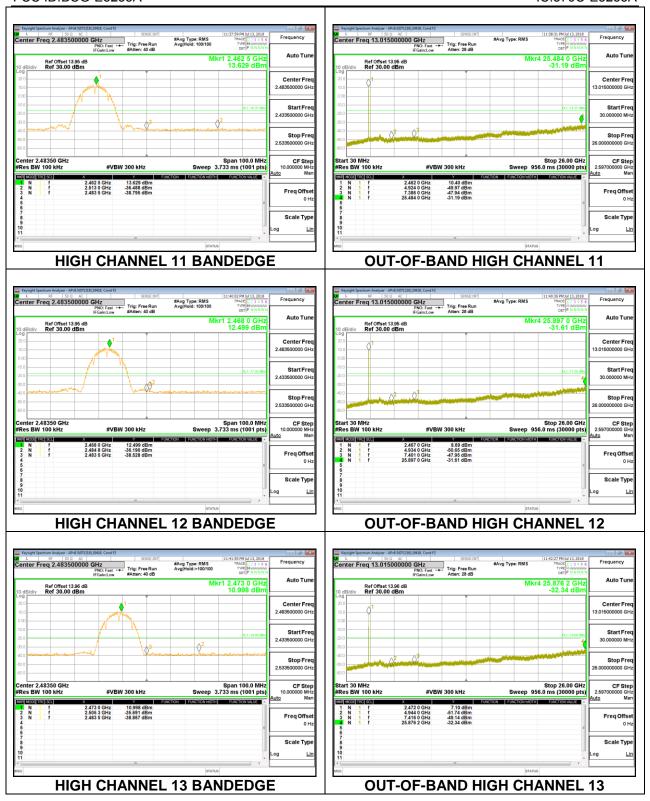

DATE: 8/13/2018 IC:579C-E3235A

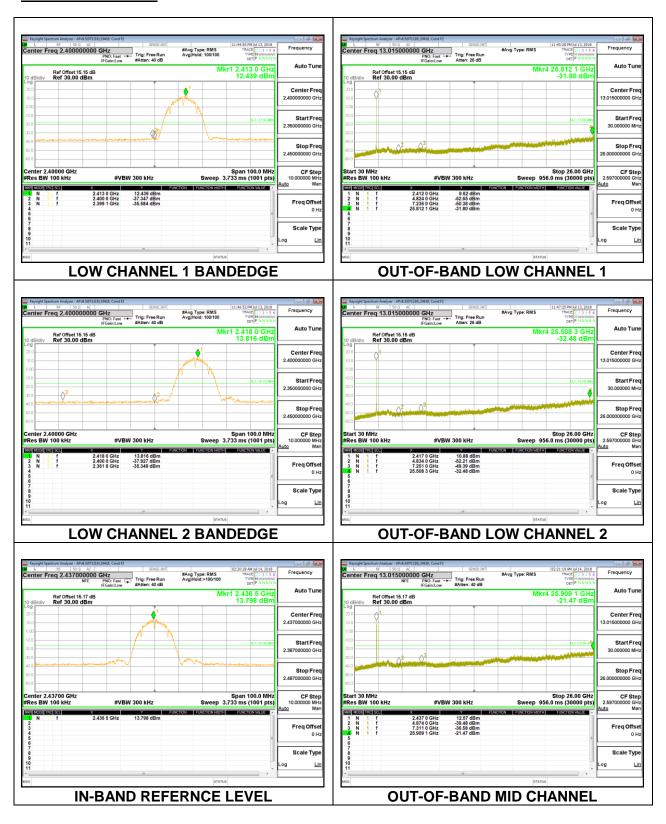

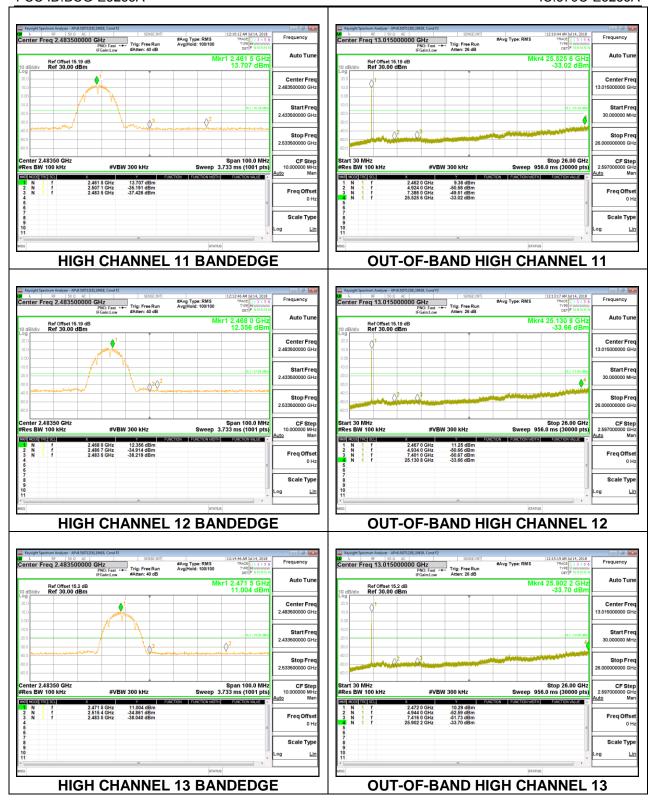

8.6.2. 802.11n HT20 MODE

1TX Antenna 4 MODE

