



TEST REPORT

Report Number: 13336566-E3V2

Applicant : APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A2406

FCC ID : BCG-E3546A

IC : 579C-E3546A

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 ISSUE 2
ISED RSS-GEN ISSUE 5

Date of Issue:
September 24, 2020

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	9/21/2020	Initial Issue	Chin Pang
V2	9/24/2020	Addressed TCB question	Vien Tran

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS	4
2. TEST RESULTS SUMMARY	5
3. TEST METHODOLOGY	5
4. FACILITIES AND ACCREDITATION	5
5. DECISION RULES AND MEASUREMENT UNCERTAINTY	6
5.1. METROLOGICAL TRACEABILITY	6
5.2. DECISION RULES.....	6
5.3. MEASUREMENT UNCERTAINTY.....	6
6. INTRODUCTION OF TEST DATA REUSE.....	7
6.1. EUT DESCRIPTION	7
6.2. INTRODUCTION	7
6.3. SPOT CHECK VERIFICATION RESULTS SUMMARY	7
6.4. REFERENCE DETAIL	14
6.5. DESCRIPTION OF AVAILABLE ANTENNAS	14
6.6. SOFTWARE AND FIRMWARE.....	14
6.7. WORST-CASE CONFIGURATION AND MODE.....	14
6.8. DESCRIPTION OF TEST SETUP.....	15
7. MEASUREMENT METHOD.....	16
8. TEST AND MEASUREMENT EQUIPMENT	16
9. SETUP PHOTOS.....	16
Appendix A – Reference Test Report	17

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A

EUT DESCRIPTION: SMARTPHONE

MODEL: A2406

SERIAL NUMBER: (Original): G6TCP01UQ5R9, G6TCM020Q5T6
(Spot Check): G6TCN00GQ5W0, G6TCN00KQ5W0

DATE TESTED: JULY 25, 2020 – JULY 26, 2020

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies
ISED RSS-247 Issue 2	Complies
ISED RSS-GEN Issue 5	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For
UL Verification Services Inc. By:



Chin Pang
Senior Engineer
Consumer Technology Division
UL Verification Services Inc.

Prepared By:



Jingang Li
Test Engineer
Consumer Technology Division
UL Verification Services Inc.

2. TEST RESULTS SUMMARY

FCC Clause	ISED Clause	Requirement	Result	Comment
15.209, 15.205	RSS-GEN 8.9, 8.10	Radiated Emissions	Complies	None.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 662911, RSS-GEN Issue 5, and RSS-247 Issue 2.

4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, and 47658 Kato Road, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street	47658 Kato Rd.
☐ Chamber A (IC:2324B-1)	☐ Chamber D (IC:22541-1)	☐ Chamber I (IC: 2324A-5)
☐ Chamber B (IC:2324B-2)	☐ Chamber E (IC:22541-2)	☐ Chamber J (IC: 2324A-6)
☐ Chamber C (IC:2324B-3)	☐ Chamber F (IC:22541-3)	☐ Chamber K (IC: 2324A-1)
	☐ Chamber G (IC:22541-4)	☒ Chamber L (IC: 2324A-3)
	☐ Chamber H (IC:22541-5)	☐ Chamber M (IC: 2324A-2)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers above are covered under Industry Canada company address and respective code: 2324A.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{Lab}
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.39 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.07 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.52 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	4.88 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.24 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.37 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.17 dB

Uncertainty figures are valid to a confidence level of 95%.

6. INTRODUCTION OF TEST DATA REUSE

6.1. EUT DESCRIPTION

EUT is a The Apple iPhone is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, 5G, CDMA, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wideband, GPS, NFC and WPT. All models support at least one UICC based SIM. The second SIM is either an UICC based p-SIM (physical SIM) or e-SIM (electronic SIM). The device supports a built-in inductive charging transmitter and receiver. The rechargeable battery is not user accessible.

6.2. INTRODUCTION

This application for certification is leveraging the data reuse procedures from KDB 484596 D01 based on reference FCC ID: BCG-E3545A, IC: 579C-E3545A to cover variant model BCG-E3546A, 579C-E3546A. The major difference between the parent/reference model and the variant model is the depopulation in the variant model of the mmWave transmitter. All other circuitry and features are identical. The data reuse test plan was approved via manufacturer KDB inquiry.

6.3. SPOT CHECK VERIFICATION RESULTS SUMMARY

Spot check verification has been done on device model A2406, FCC ID: BCG-E3546A, IC: 579C-E3546A for radiated spurious and radiated band-edge in accordance with the Test Plan that was approved via KDB inquiry.

BCG-E3546A, 579C-E3546A SPOT CHECK RESULTS										
Technology	Mode	Test Item	Channel	Measured	Original model		Spot check model		Delta (dB)	
				Frequency (MHz)	BCG-E3545A 579C-E3545A		BCG-E3546A 579C-E3546A			
					A2341		A2406			
					Peak	Ave	Peak	Ave	Peak	Ave
HDR	HDR4	RBE	Low	2390.0	54.49	41.92	54.26	42.34	-0.23	0.42
			High	2483.5	60.53	48.89	65.32	50.75	4.79	1.86
	HDR8	RSE	Mid	10739.5	49.48	38.64	50.5	37.08	1.02	-1.56


Comparison of the models, the upper deviation is within 3dB for the worst-case measurements relative to the limit. Note some peak values are more than 3dB higher, but the corresponding average value, which has less margin relative to the average limit for emissions, is within 3 dB of the reference model. All measurements are under FCC/IC Technical Limits.

Note: The output powers were verified on model A2406 to match with model A2341 before radiated emissions spot check was performed.

SPOT CHECK DATA

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

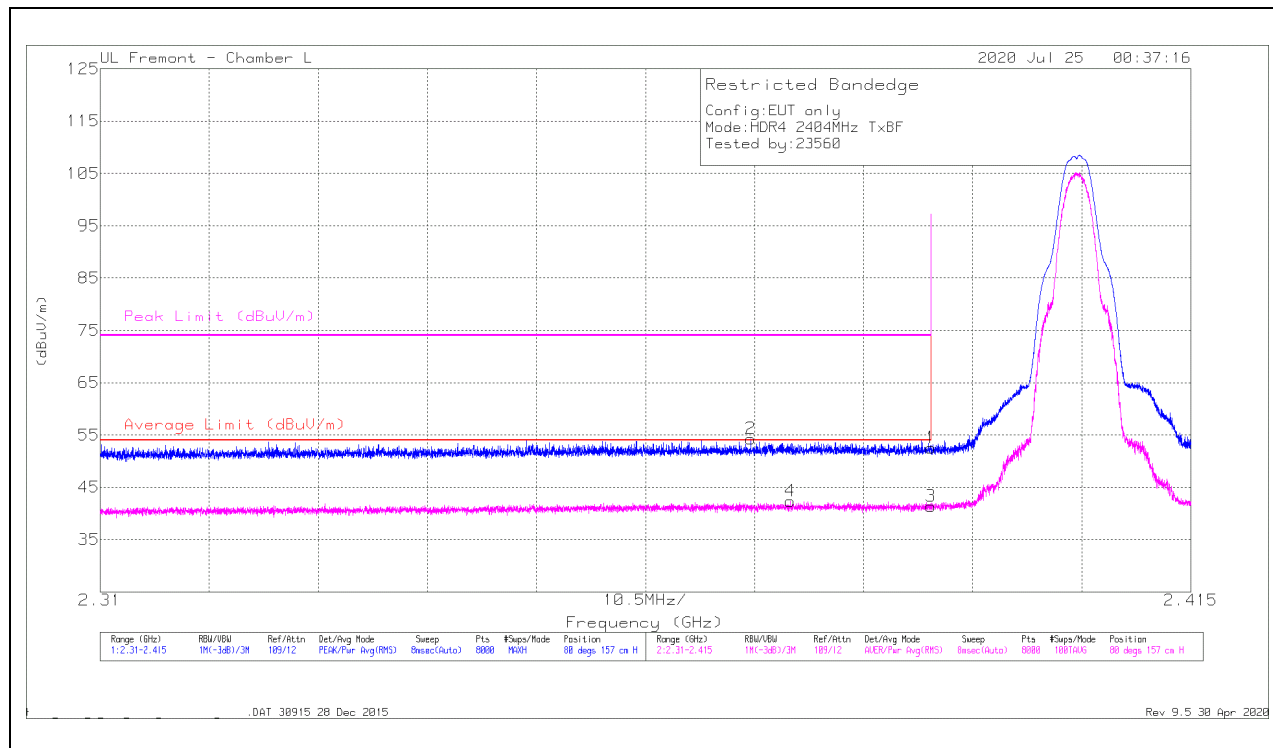


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Dega)	Height (cm)	Polarity
1	* 2.39	33.68	Pk	31.9	-13.1	52.48	-	-	74	-21.52	80	157	H
2	* 2.37263	35.51	Pk	31.8	-13.1	54.21	-	-	74	-19.79	80	157	H
3	* 2.39	22.51	RMS	31.9	-13.1	41.31	54	-12.69	-	-	80	157	H
4	* 2.37642	23.6	RMS	31.8	-13.1	42.30	54	-11.7	-	-	80	157	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

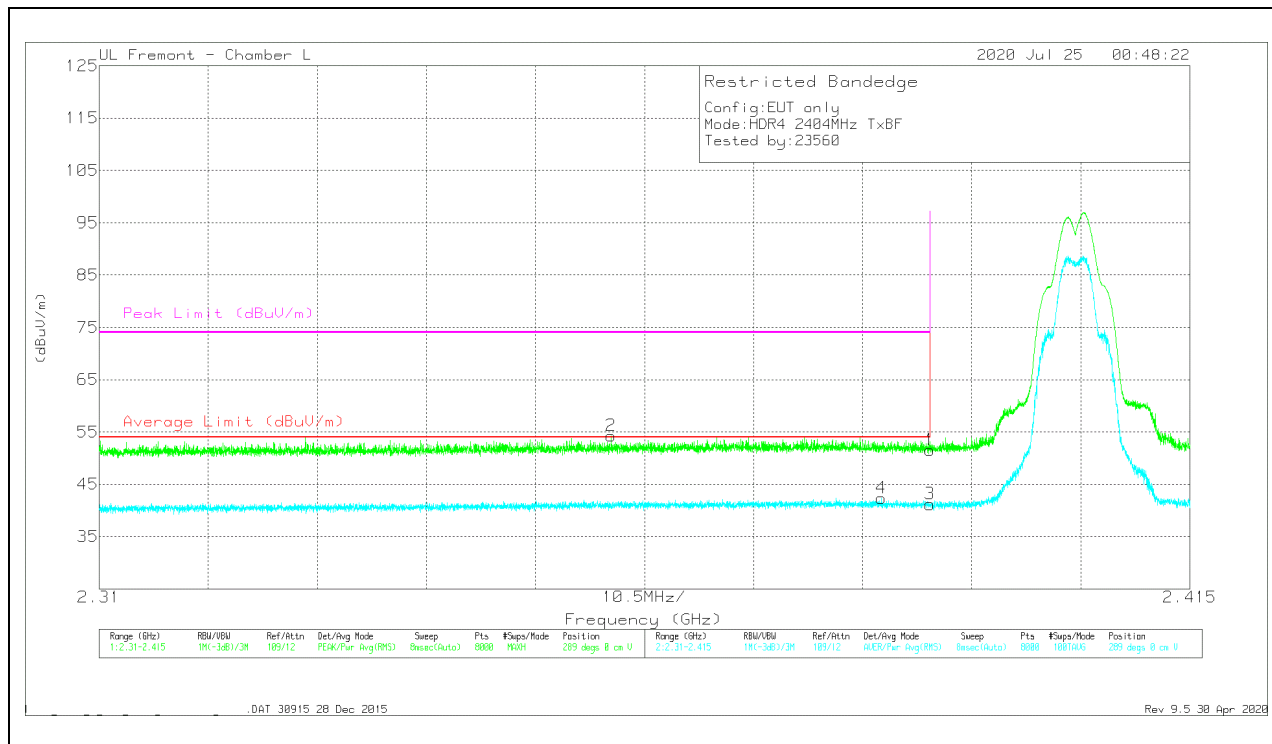


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	32.78	Pk	31.9	-13.1	51.58	-	-	74	-22.42	289	281	V
2	* 2.35931	35.66	Pk	31.7	-13.1	54.26	-	-	74	-19.74	289	281	V
3	* 2.39	22.37	RMS	31.9	-13.1	41.17	54	-12.83	-	-	289	281	V
4	* 2.38528	23.64	RMS	31.8	-13.1	42.34	54	-11.66	-	-	289	281	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

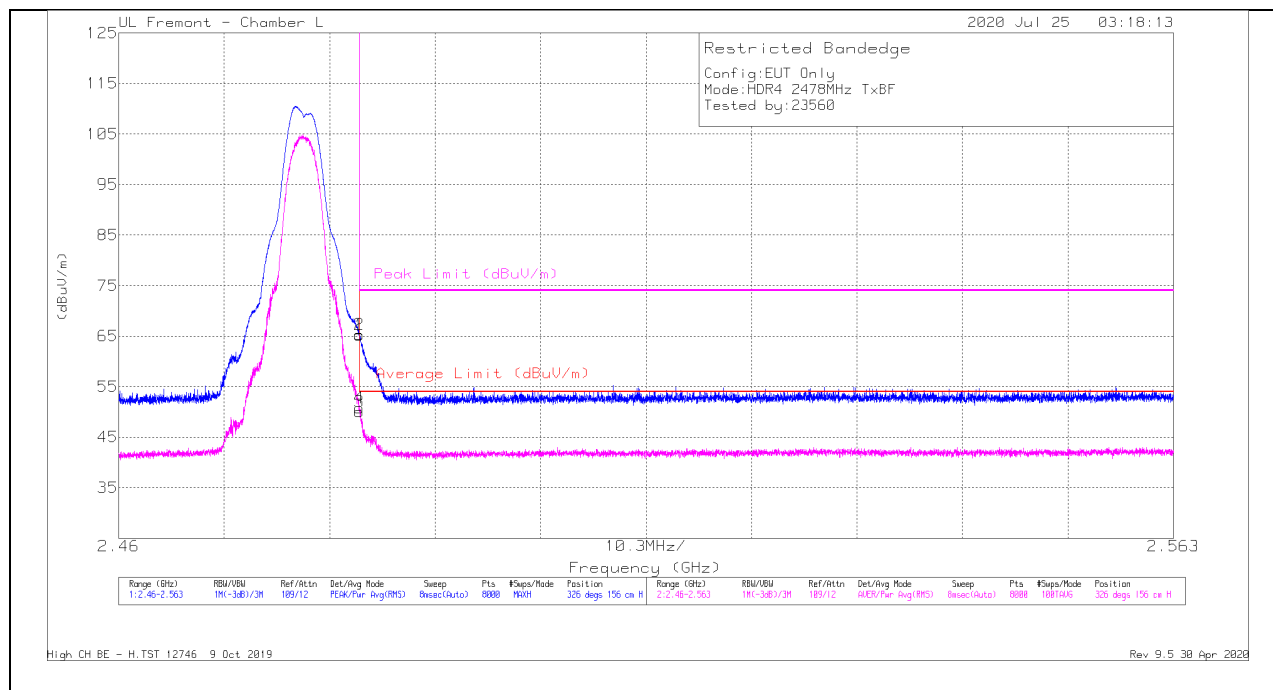


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	45.84	Pk	32.3	-12.9	65.24	-	-	74	-8.76	326	156	H
2	* 2.48351	45.92	Pk	32.3	-12.9	65.32	-	-	74	-8.68	326	156	H
3	* 2.4835	30.67	RMS	32.3	-12.9	50.07	54	-3.93	-	-	326	156	H
4	* 2.48351	31.35	RMS	32.3	-12.9	50.75	54	-3.25	-	-	326	156	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT


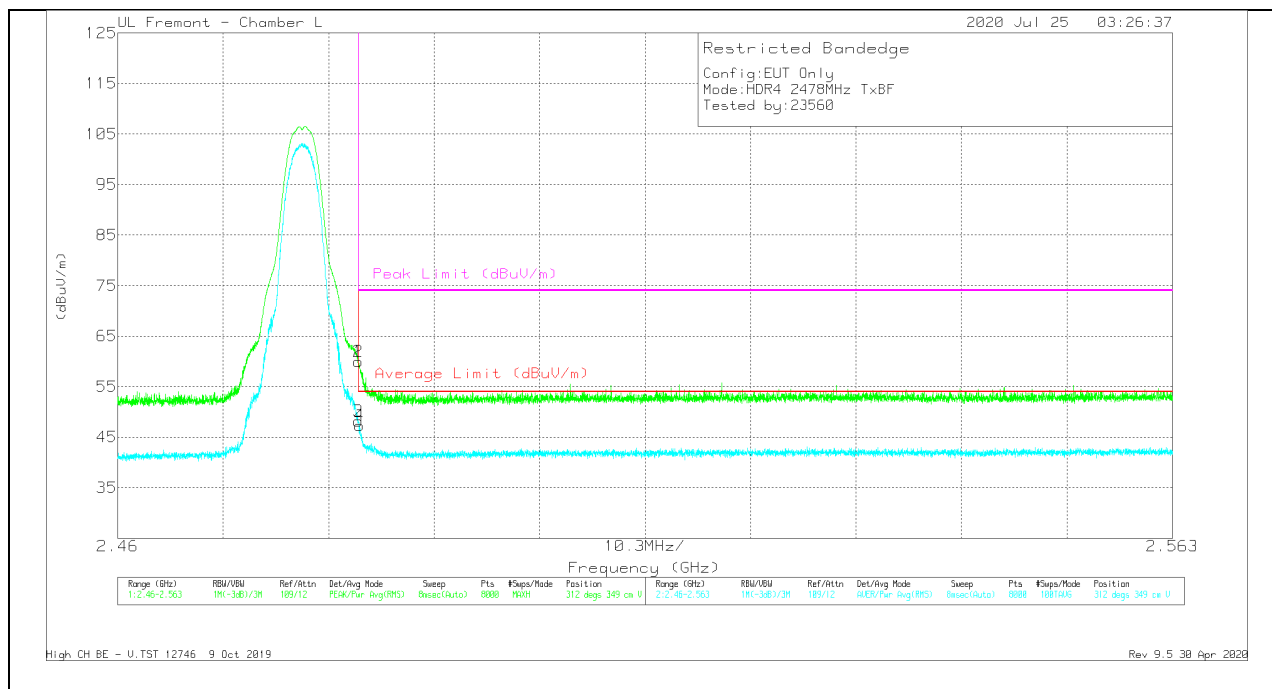


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cb/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	40.54	Pk	32.3	-12.9	59.94	-	-	74	-14.06	312	349	V
2	* 2.48351	40.63	Pk	32.3	-12.9	60.03	-	-	74	-13.97	312	349	V
3	* 2.4835	28.74	RMS	32.3	-12.9	48.14	54	-5.86	-	-	312	349	V
4	* 2.48364	27.86	RMS	32.3	-12.9	47.26	54	-6.74	-	-	312	349	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

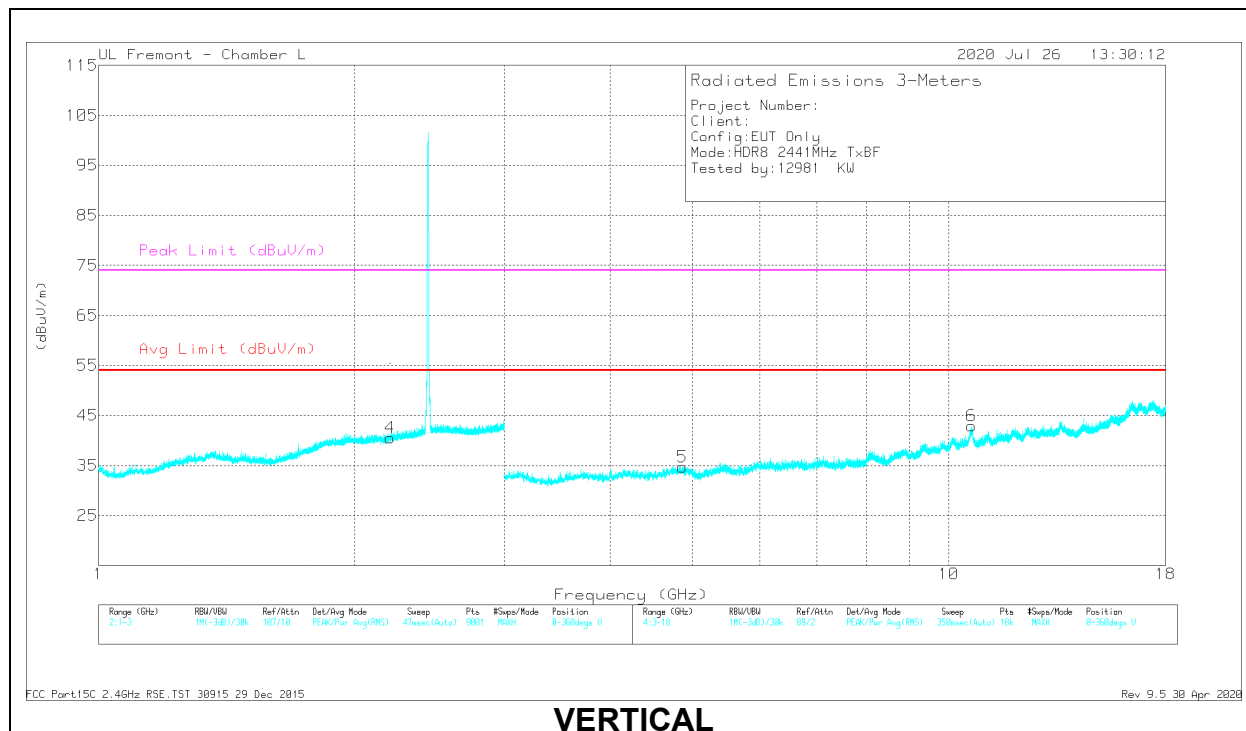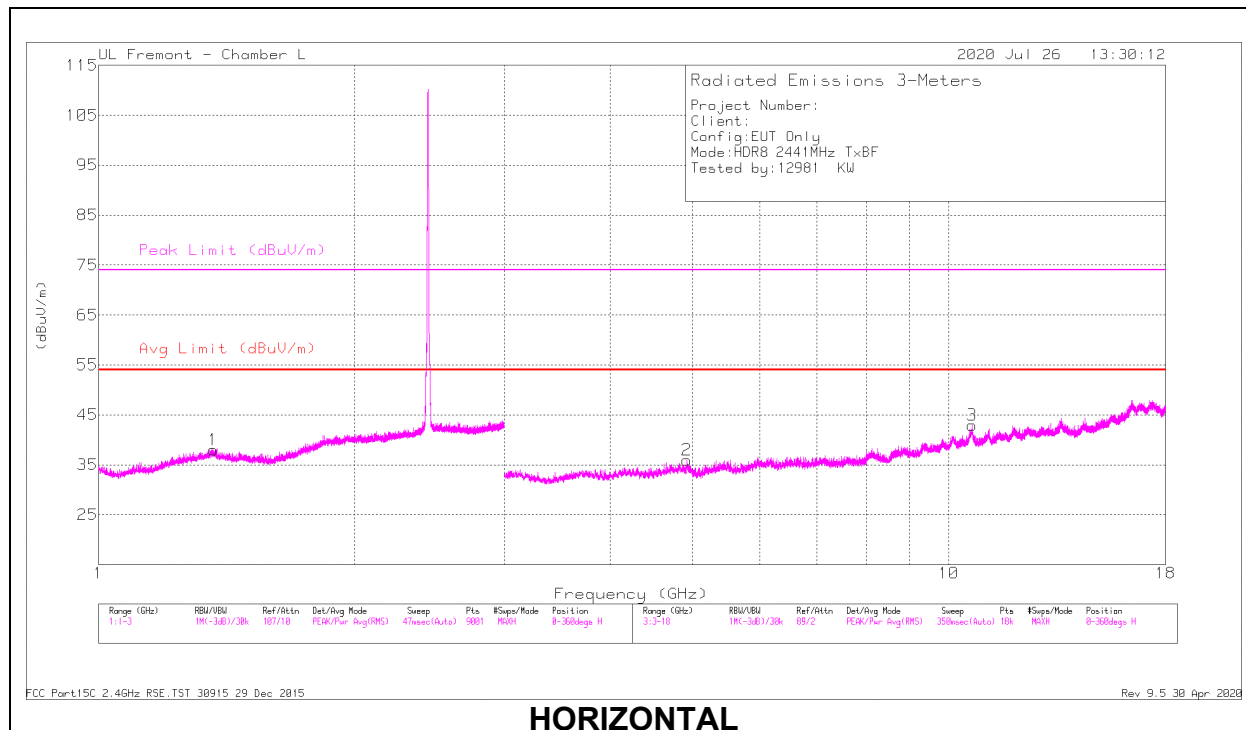

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/ Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.36371	40.6	PK2	29.4	-23.5	46.5	-	-	74	-27.5	240	133	H
	* 1.36383	26.65	MAv1	29.4	-23.5	32.55	54	-21.45	-	-	240	133	H
4	* 2.20447	39.3	PK2	31.6	-21.5	49.4	-	-	74	-24.6	337	381	V
	* 2.20328	25.84	MAv1	31.6	-21.5	35.94	54	-18.06	-	-	337	381	V
2	* 4.92069	36.55	PK2	34.1	-26.3	44.35	-	-	74	-29.65	181	393	H
	* 4.91959	22.62	MAv1	34.1	-26.4	30.32	54	-23.68	-	-	181	393	H
3	* 10.65076	30.04	PK2	37.9	-17.2	50.74	-	-	74	-23.26	34	296	H
	* 10.65315	16.43	MAv1	37.9	-17.2	37.13	54	-16.87	-	-	34	296	H
5	* 4.8642	37.03	PK2	34.1	-27.4	43.73	-	-	74	-30.27	340	371	V
	* 4.86418	23.3	MAv1	34.1	-27.4	30	54	-24	-	-	340	371	V
6	* 10.63618	30.2	PK2	37.9	-17.6	50.5	-	-	74	-23.5	219	400	V
	* 10.63607	16.78	MAv1	37.9	-17.6	37.08	54	-16.92	-	-	219	400	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

FCC Part15C 2.4GHz RSE.TST 30915 29 Dec 2015
Rev 9.5 30 Apr 2020

6.4. REFERENCE DETAIL

Reference application that contains the reference data which is attached to this report in Appendix A.

Equipment Class	Reference FCC ID & IC	Reference Report	Report Title/Section
DTS	BCG-E3545A 579C-E3545A	13259315-E3	FCC IC_HDR Report / All sections

6.5. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Range (GHz)	ANT 4 (Core 0) (dBi)	ANT 3 (Core 1) (dBi)
2.4	-1.9	0.4

6.6. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was 18.1.148.558

6.7. WORST-CASE CONFIGURATION AND MODE

Radiated band edge and spurious emissions from 1GHz to 18GHz were performed based on the Model A2341 worst case with the EUT set at highest power at Low/Middle/High channels.

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The Wi-Fi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.


6.8. DESCRIPTION OF TEST SETUP

SUPPORT TEST EQUIPMENT						
Description		Manufacturer	Model	Serial Number		FCC ID/ DoC
Laptop		Apple	A1502	HRP003436		QDS-BRCM1080
Laptop AC/DC adapter		Liteon Technology	PA-1450-BA1	B123		NA
EUT AC/DC adapter			Apple	A1385	D29325SM03XDHLHC9	NA
I/O CABLES (RF RADIATED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	2	N/A
2	USB	1	USB	Un-shielded	1	N/A

TEST SETUP

The EUT is connected to a test laptop during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR RADIATED TESTS Above 1 GHz

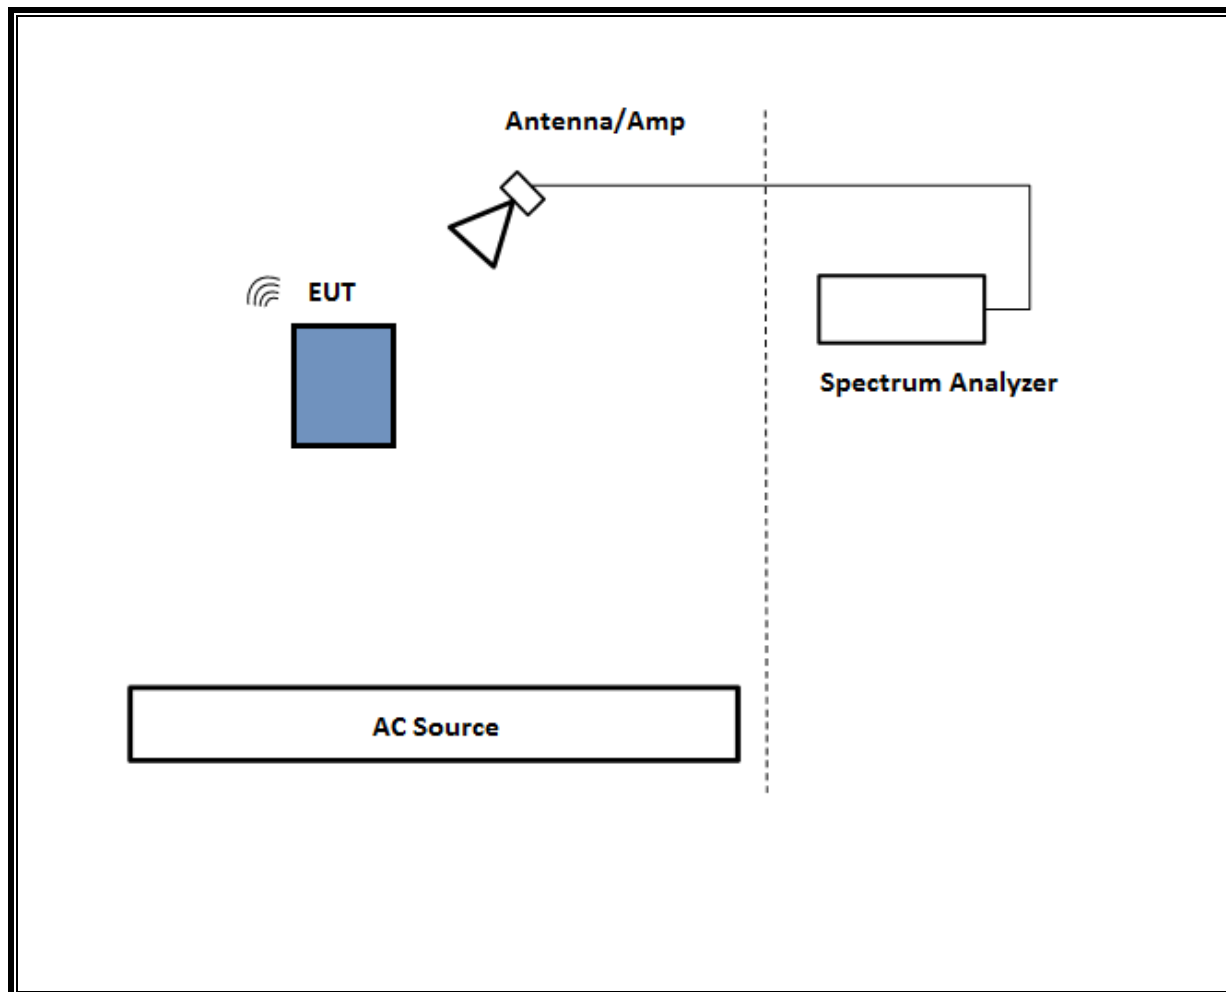

7. MEASUREMENT METHOD

Output Power: ANSI C63.10 Subclause -11.9.1.3 Method PKPM1 Peak-reading power meter

Output Power: ANSI C63.10 Subclause -11.9.2.3.2 Measurement using gated average power meter.

Radiated emissions restricted frequency bands: ANSI C63.10 Subclause -11.12.1 & Clause 13

Band-edge: ANSI C63.10 Subclause -11.13.3.2 & Clause 13: Integration method -Peak detection

Band-edge: ANSI C63.10 Subclause -11.13.3.3 & Clause 13: Integration method -Trace averaging with continuous transmission at full power

Radiated emissions non-restricted frequency bands ANSI C63.10 Subclause – 11.11 & Clause 13

NOTE: All conducted antenna port tests for Beamforming applied the same test procedures as HDR normal modes.

8. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment were utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T344	5/26/2021	5/26/2020
Amplifier, 1 to 18GHz, 35dB	Amplicol	AFS42-00101800-25-S-42	T1568	04/14/2021	4/14/2020
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	PRE0180917	2/26/2021	2/26/2020
Power Meter, P-series single channel	Keysight	N1911A	PRE0177682	01/21/2021	01/21/2020
Power Sensor	Keysight	N1921A	T1226	02/13/2021	02/13/2020

UL AUTOMATION SOFTWARE			
Radiated Software	UL	UL EMC	Ver 9.5, Mar 6, 2020

*Testing is completed before equipment expiration date.

9. SETUP PHOTOS

Please refer to 13259315-EP1 for setup photos

END OF TEST REPORT

Appendix A – Reference Test Report

Attached is the test report (13259315-E3) containing the reference data from the parent model as detailed in section 6.4.



TEST REPORT

Report Number. : 13259315-E3V3

Applicant : APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A2341

FCC ID : BCG-E3545A

IC : 579C-E3545A

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 ISSUE 2
ISED RSS-GEN ISSUE 5

Date of Issue:
September 21, 2020

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	8/26/2020	Initial Issue	Chin Pang
V2	9/18/2020	Address TCB's Questions	Chin Pang
V3	9/21/2020	Address TCB's Questions	Chin Pang

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS	6
2. TEST RESULTS SUMMARY	7
3. TEST METHODOLOGY	7
4. FACILITIES AND ACCREDITATION	7
5. DECISION RULES AND MEASUREMENT UNCERTAINTY	8
5.1. METROLOGICAL TRACEABILITY	8
5.2. DECISION RULES.....	8
5.3. MEASUREMENT UNCERTAINTY.....	8
6. EQUIPMENT UNDER TEST	9
6.1. EUT DESCRIPTION	9
6.2. MAXIMUM OUTPUT POWER.....	9
6.3. DESCRIPTION OF AVAILABLE ANTENNAS	9
6.4. SOFTWARE AND FIRMWARE.....	9
6.5. WORST-CASE CONFIGURATION AND MODE	10
6.6. DESCRIPTION OF TEST SETUP.....	11
7. MEASUREMENT METHOD.....	16
8. TEST AND MEASUREMENT EQUIPMENT	17
9. ANTENNA PORT TEST RESULTS	18
9.1. ON TIME AND DUTY CYCLE.....	18
9.2. 99% BANDWIDTH.....	20
9.2.1. HIGH POWER HDR (HDR4).....	21
9.2.2. HIGH POWER HDR (HDR8).....	22
9.2.3. HIGH POWER HDR TXBF (HDR4).....	23
9.2.4. HIGH POWER HDR TXBF (HDR8).....	24
9.3. 6 dB BANDWIDTH.....	25
9.3.1. HIGH POWER HDR (HDR4).....	26
9.4. OUTPUT POWER.....	27
9.4.1. HIGH POWER HDR (HDR4).....	28
9.4.2. HIGH POWER HDR (HDR8).....	28
9.4.3. LOW POWER HDR (HDR4)	29

9.4.4.	LOW POWER HDR (HDR8)	29
9.4.5.	HIGH POWER HDR TXBF (HDR4)	30
9.4.6.	HIGH POWER HDR TXBF (HDR8)	30
9.4.7.	LOW POWER HDR TXBF (HDR4)	30
9.4.8.	LOW POWER HDR TXBF (HDR8)	30
9.5.	AVERAGE POWER	31
9.5.1.	HIGH POWER HDR (HDR4)	32
9.5.2.	HIGH POWER HDR (HDR8)	32
9.5.3.	LOW POWER HDR (HDR4)	33
9.5.4.	LOW POWER HDR (HDR8)	33
9.5.5.	HIGH POWER HDR TXBF (HDR4)	34
9.5.6.	HIGH POWER HDR TXBF (HDR8)	34
9.5.7.	LOW POWER HDR TXBF (HDR4)	34
9.5.8.	LOW POWER HDR TXBF (HDR8)	34
9.6.	POWER SPECTRAL DENSITY	35
9.6.1.	HIGH POWER HDR (HDR4)	36
9.6.2.	HIGH POWER HDR (HDR8)	37
9.6.3.	LOW POWER HDR (HDR4)	38
9.6.4.	LOW POWER HDR (HDR8)	39
9.6.5.	HIGH POWER HDR TXBF (HDR4)	40
9.6.6.	HIGH POWER HDR TXBF (HDR8)	41
9.6.7.	LOW POWER HDR TXBF (HDR4)	42
9.6.8.	LOW POWER HDR TXBF (HDR8)	43
9.7.	CONDUCTED SPURIOUS EMISSIONS	44
9.7.1.	HIGH POWER HDR (HDR4)	45
9.7.2.	HIGH POWER HDR TXBF (HDR4)	47
9.7.3.	HIGH POWER HDR (HDR8)	49
9.7.4.	HIGH POWER HDR TXBF (HDR8)	51
9.7.5.	LOW POWER HDR (HDR4)	53
9.7.6.	LOW POWER HDR TXBF (HDR4)	55
9.7.7.	LOW POWER HDR (HDR8)	57
9.7.8.	LOW POWER HDR TXBF (HDR8)	59
10.	RADIATED TEST RESULTS	61
10.1.	LIMITS AND PROCEDURE	61
10.2.	TRANSMITTER ABOVE 1 GHz	63
10.2.1.	HIGH POWER HDR (HDR4)	63
10.2.2.	HIGH POWER HDR (HDR8)	71
10.2.3.	LOW POWER HDR (HDR4)	79
10.2.4.	LOW POWER HDR (HDR8)	87
10.2.5.	HIGH POWER HDR TXBF (HDR4)	95
10.2.6.	HIGH POWER HDR TXBF (HDR8)	99
10.2.7.	LOW POWER HDR TXBF (HDR4)	103
10.2.8.	LOW POWER HDR TXBF (HDR8)	107
10.2.9.	2TX BF HDR4, HARMONICS AND SPURIOUS EMISSIONS	111
10.3.	WORST CASE BELOW 1 GHz	117
10.4.	WORST CASE 18-26 GHZ	119

11.	AC POWER LINE CONDUCTED EMISSIONS	121
11.1.	AC Power Line With Laptop.....	122
11.2.	AC Power Line With AC/DC Adapter	124
12.	SETUP PHOTOS	126

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A

EUT DESCRIPTION: SMARTPHONE

MODEL: A2341

SERIAL NUMBER: G6TCP01UQ5R9, G6TCM020Q5T6

DATE TESTED: MARCH 12, 2010 – JULY 30, 2020

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies
ISED RSS-247 Issue 2	Complies
ISED RSS-GEN Issue 5	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.


This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For
UL Verification Services Inc. By:



Chin Pang
Senior Engineer
Consumer Technology Division
UL Verification Services Inc.

Prepared By:



Jingang Li
Test Engineer
Consumer Technology Division
UL Verification Services Inc.

2. TEST RESULTS SUMMARY

FCC Clause	ISED Clause	Requirement	Result	Comment
See Comment		Duty Cycle	Reporting purposes only	ANSI C63.10 Section 11.6.
-	RSS-GEN 6.7	99% OBW	Reporting purposes only	ANSI C63.10 Section 6.9.3.
15.247 (a) (2)	RSS-247 5.2 (a)	6dB BW	Complies	None.
15.247 (b) (3)	RSS-247 5.4 (d)	Output Power	Complies	None.
See Comment		Average power	Reporting purposes only	Per ANSI C63.10, Section 11.9.2.3.2.
15.247 (e)	RSS-247 5.2 (b)	PSD	Complies	None.
15.247 (d)	RSS-247 5.5	Conducted Spurious Emissions	Complies	None.
15.209, 15.205	RSS-GEN 8.9, 8.10	Radiated Emissions	Complies	None.
15.207	RSS-Gen 8.8	AC Mains Conducted Emissions	Complies	None.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 662911, RSS-GEN Issue 5, and RSS-247 Issue 2.

4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, and 47658 Kato Road, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street	47658 Kato Rd.
☒ Chamber A (IC:2324B-1)	☐ Chamber D (IC:22541-1)	☒ Chamber I (IC: 2324A-5)
☐ Chamber B (IC:2324B-2)	☒ Chamber E (IC:22541-2)	☐ Chamber J (IC: 2324A-6)
☐ Chamber C (IC:2324B-3)	☐ Chamber F (IC:22541-3)	☐ Chamber K (IC: 2324A-1)
	☐ Chamber G (IC:22541-4)	☐ Chamber L (IC: 2324A-3)
	☐ Chamber H (IC:22541-5)	☐ Chamber M (IC: 2324A-2)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers above are covered under Industry Canada company address and respective code.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U_{Lab}
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.39 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.07 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.52 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	4.88 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.24 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.37 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.17 dB

Uncertainty figures are valid to a confidence level of 95%.

6. EQUIPMENT UNDER TEST

6.1. EUT DESCRIPTION

The Apple iPhone is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, 5G, CDMA, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wideband, GPS, NFC and WPT. All models support at least one UICC based SIM. The second SIM is either an UICC based p-SIM (physical SIM) or e-SIM (electronic SIM). The device supports a built-in inductive charging transmitter and receiver. The rechargeable battery is not user accessible.

6.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Antenna	Frequency Range (MHz)	Mode	Configuration	Output Power (dBm)	Output Power (mW)
ANT 4	2404 - 2478	HDR4	High Power	14.45	27.86
			Low Power	8.74	7.48
		HDR8	High Power	15.41	34.75
			Low Power	9.73	9.40
ANT 3	2404 - 2478	HDR4	High Power	14.40	27.54
			Low Power	8.66	7.35
		HDR8	High Power	15.43	34.91
			Low Power	9.72	9.38
BF, ANT 4 + ANT 3	2404 - 2478	HDR4	High Power	17.16	52.00
			Low Power	11.66	14.66
		HDR8	High Power	18.16	65.46
			Low Power	11.63	14.55

6.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Range (GHz)	ANT 4 (Core 0) (dBi)	ANT 3 (Core 1) (dBi)
2.4	-1.9	0.4

6.4. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was 18.1.148.558

The test utility software used during testing was QRCT v3.0.264.0.

6.5. WORST-CASE CONFIGURATION AND MODE

The EUT was investigated in three orthogonal orientations; X (Flatbed), Y (Landscape) and Z (Portrait) on ANT 4, ANT 3 and 2TX beamforming (ANT 4 + ANT 3). It was determined that X (Flatbed) was the worst-case orientation for ANT 4 and 2TX beamforming mode, and Z (Portrait) was the worst-case orientation for ANT 3.

Radiated band edge and harmonic and spurious emissions from 1GHz to 18GHz were performed with the EUT set to transmit at highest power on Low/Middle/High channels.

Radiated emissions below 1GHz, 18-26GHz and AC power line conducted emissions were performed with the EUT transmitting at the channel with the highest output power as worst-case scenario. There were no emissions found below 30MHz within 20dB of the limit.

For below 1GHz, tests were performed with EUT connected to AC power adapter as the worst case and for above 1GHz, tests were performed with EUT only. For AC power line conducted emission, tests were investigated with AC power adapter and with laptop. For below 30MHz testing, investigation was done on three antenna orientations: RX antenna Face-on, Face-off and horizontal (parallel to ground). The worst-case configurations were determined on RX antenna Face-on and Face-off; therefore, all final tests were performed using these two orientations.

For simultaneous transmission of multiple channels in the 2.4GHz BLE and 5GHz bands. No noticeable emission was found.

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The Wi-Fi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions.


6.6. DESCRIPTION OF TEST SETUP

SUPPORT TEST EQUIPMENT						
Description		Manufacturer	Model	Serial Number		FCC ID/ DoC
Laptop		Apple	Apple	A1989		C02YL3ZMJHC8
Laptop AC/DC adapter		Liteon Technology	Liteon Technology	A1718		C4N711404U3GN8RAW
EUT AC/DC adapter		Apple	Apple	A2305		C4H951700S7PF4F4F
I/O CABLES (RF CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Shielded	1.0	N/A
3	AC	1	AC	Un-shielded	2	N/A
I/O CABLES (RF RADIATED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	2	N/A
2	USB	1	USB	Un-shielded	1	N/A


TEST SETUP

The EUT is connected to a test laptop during the tests. Test software exercised the radio card.


SETUP DIAGRAM FOR CONDUCTED TESTS

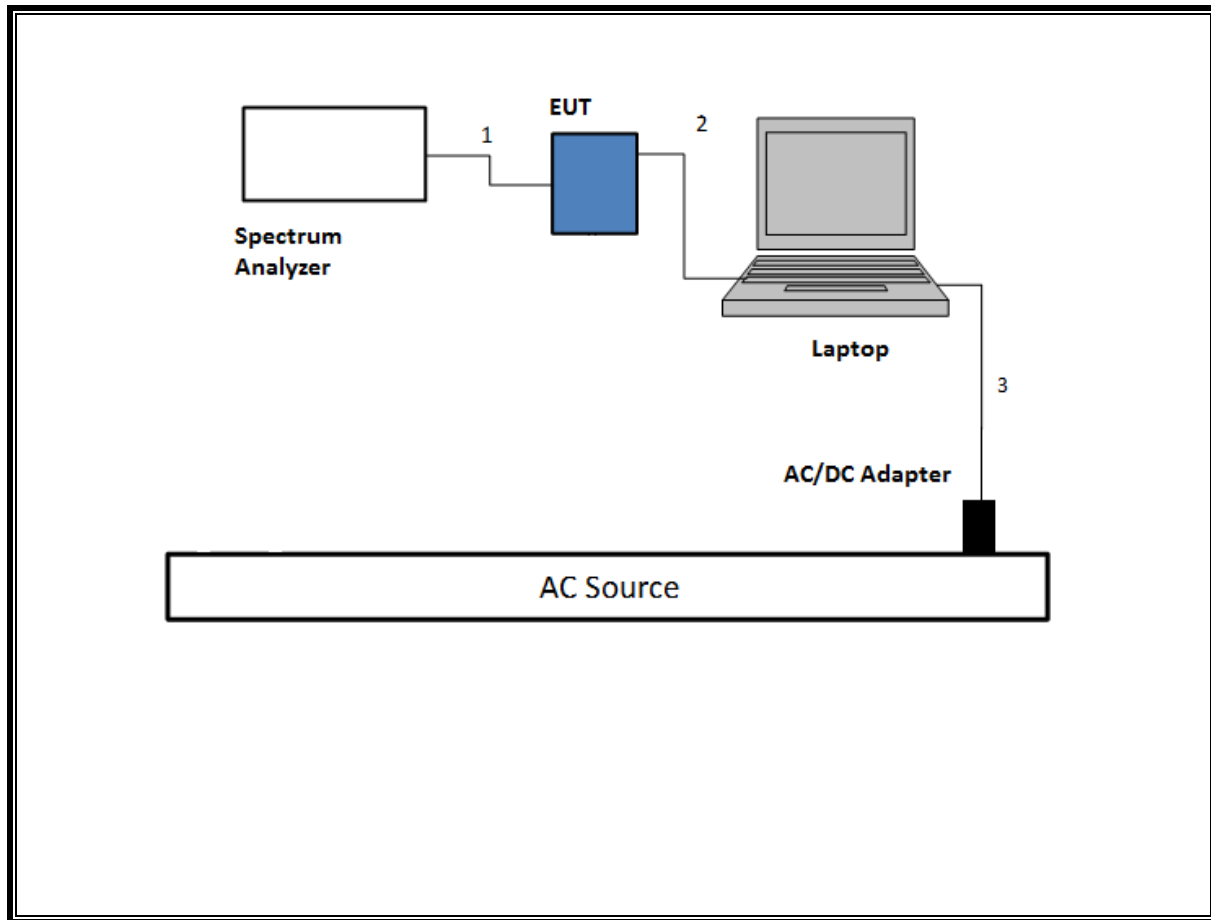


SETUP DIAGRAM FOR RADIATED TESTS Above 1 GHz

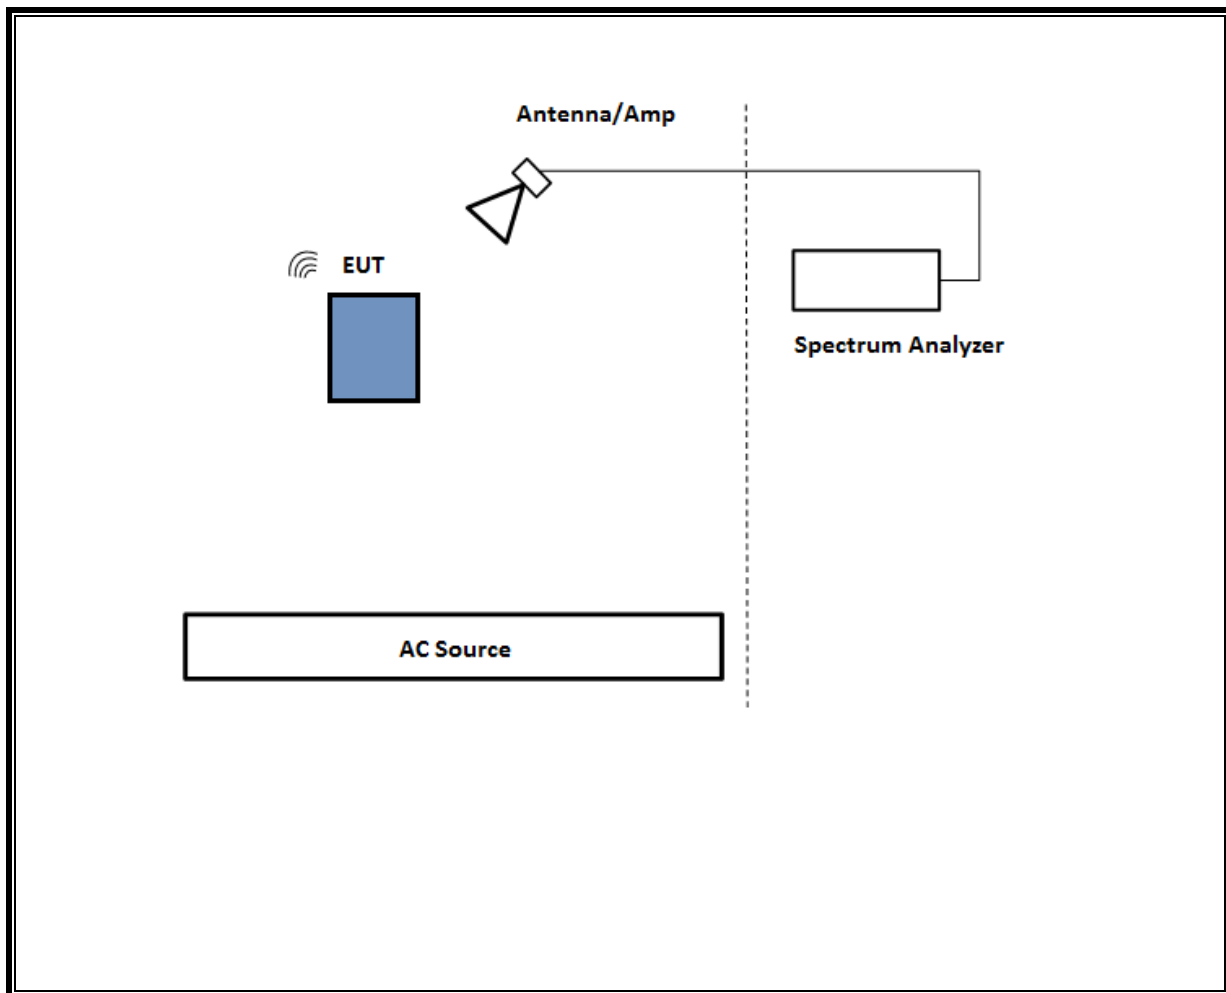

SETUP DIAGRAM FOR Below 1GHz and AC LINE CONDUCTED TEST

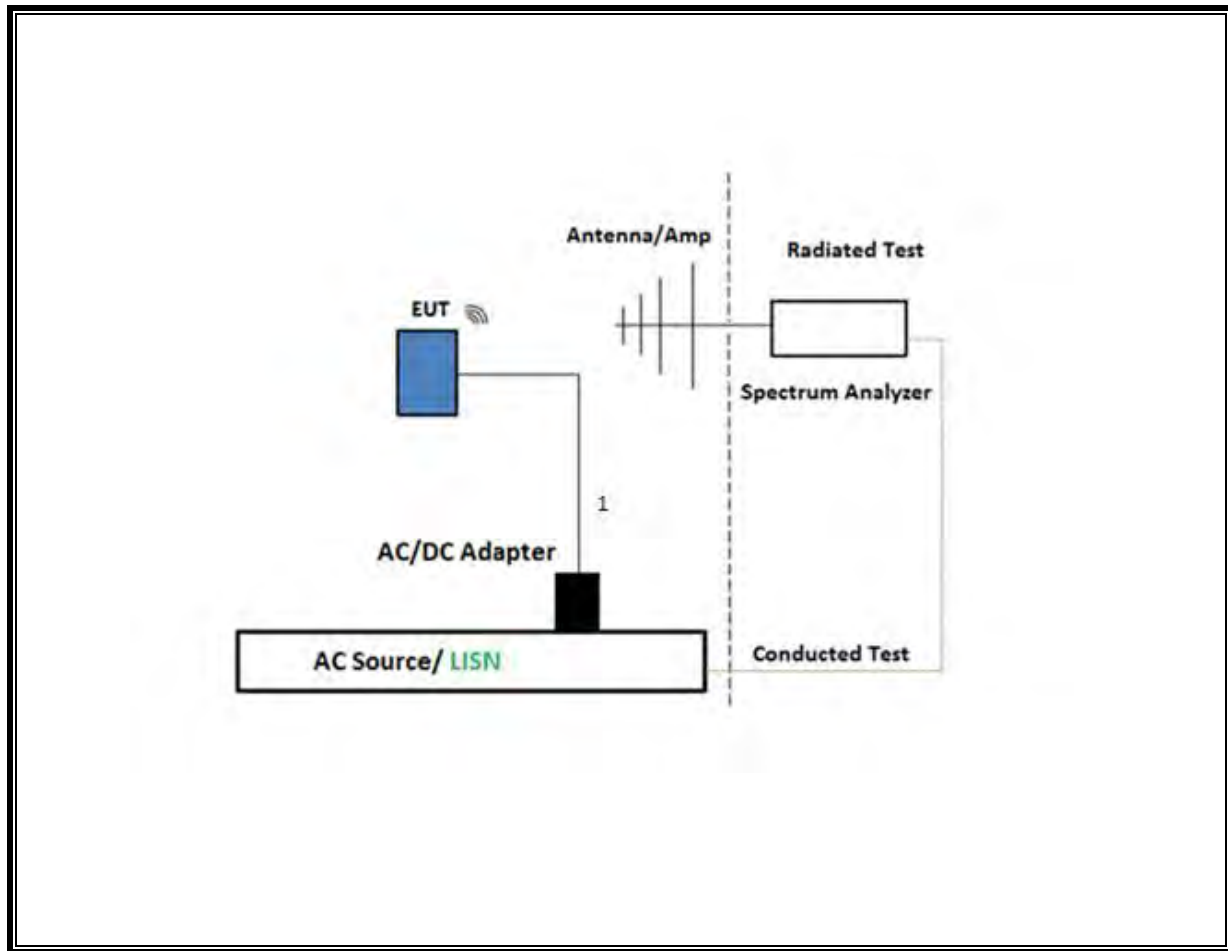

TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION

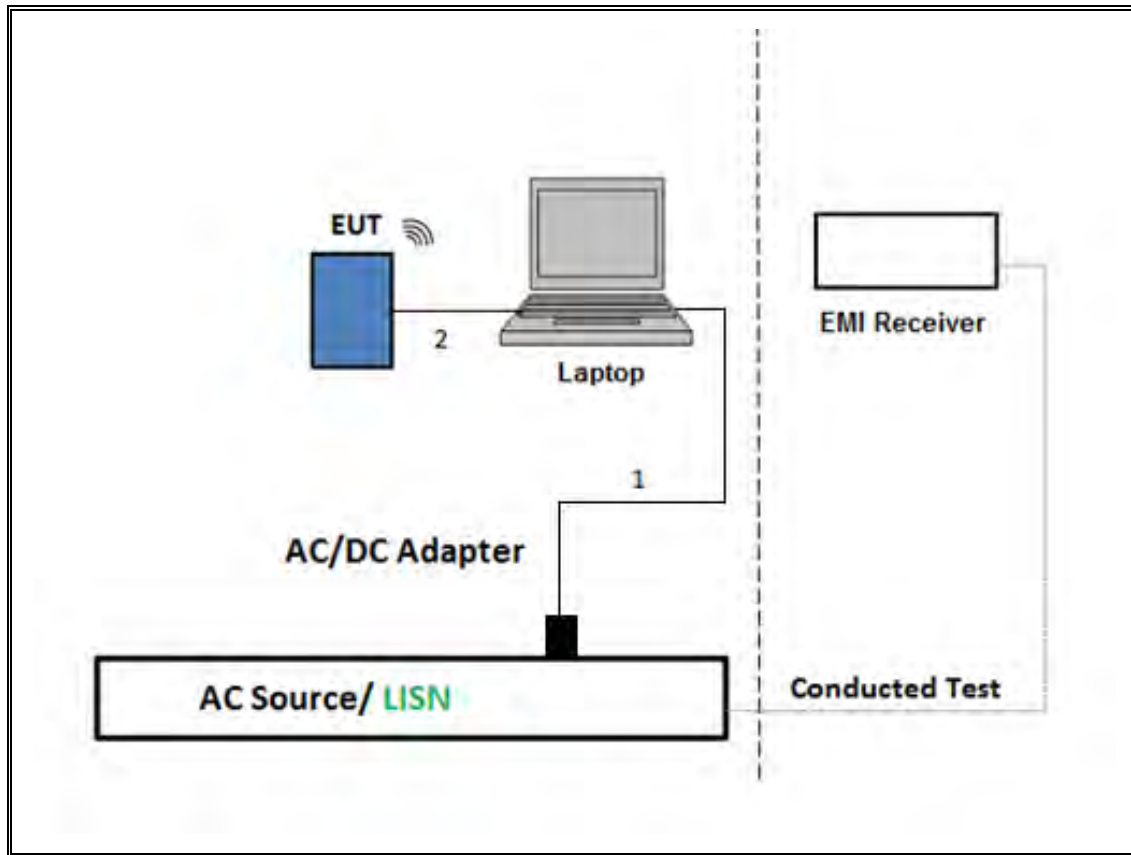

7. MEASUREMENT METHOD

6 dB BW: ANSI C63.10 Subclause -11.8.1 RBW $\geq$ DTS BW

Occupied BW (99%): ANSI C63.10-2013 Subclause 6.9.3

Output Power: ANSI C63.10 Subclause -11.9.1.3 Method PKPM1 Peak-reading power meter

Output Power: ANSI C63.10 Subclause -11.9.2.3.1 Measurement using average gated power meter

PSD: ANSI C63.10 Subclause -11.10.2 Method PKPSD (peak PSD)

Radiated emissions non-restricted frequency bands: ANSI C63.10 Subclause -11.11 & Clause 13

Radiated emissions restricted frequency bands: ANSI C63.10 Subclause -11.12.1 & Clause 13

Conducted emissions in restricted frequency bands: ANSI C63.10 Subclause -11.12.2

Band-edge: ANSI C63.10 Subclause -11.13.3.2 & Clause 13 Integration method -Peak detection

Band-edge: ANSI C63.10 Subclause -11.13.3.3 & Clause 13 Integration method -Trace averaging with continuous transmission at full power

AC Power Line Conducted Emissions: ANSI C63.10-2013, Clause 6.2.

Radiated Spurious Emissions Below 30MHz: ANSI C63.10-2013 Clause 6.4 & Clause 13

NOTE: Test procedures and settings for HDR beamforming mode are the same as HDR normal mode.

8. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
*Antenna, Horn 1-18GHz	ETS Lindgren	3117	T862	08/20/2020	08/20/2019
Amplifier, 1 to 18GHz, 35dB	Ampical	AFS42-00101800-25-S-42	T1567	01/24/2021	01/24/2020
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T712	03/09/2021	03/09/2020
RF Amplifier, 1-18GHz	MITEQ	AFS42-00101800-25-S-42	171460	08/24/2020	08/24/2019
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T1210	01/21/2021	01/21/2020
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T1466	01/23/2021	01/23/2020
Antenna, Broadband Hybrid, 30MHz to 3000MHz	Sun AR rf motion	JB3	Pre0181575	09/05/2020	09/05/2019
*Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	Pre0180089	07/06/2020	07/06/2019
Antenna Horn, 18 to 26GHz	ARA	SWH-28	T125	04/17/2021	04/17/2020
Pre-Amp 18-26GHz	Agilent Technology	8449B	T404	04/08/2021	04/08/2020
Antenna, Active Loop 9KHz to 30MHz	ETS-Lindgren	6502	T757	10/01/2020	10/01/2019
Power Meter, P-series single channel	Keysight	N1911A	PRE0177682	01/21/2021	01/21/2020
Power Sensor	Keysight	N1921A	T1226	02/13/2021	02/13/2020
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T1454	01/23/2021	01/23/2020

AC Line Conducted					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
EMI Test Receiver 9kHz-7GHz	Rohde & Schwarz	ESR	T1436	02/20/2021	02/20/2020
Power Cable, Line Conducted Emissions	UL	PR1	T861	10/27/2020	10/27/2019
LISN for Conducted Emissions CISPR-16	FISCHER CUSTOM COMMUNICATIONS	FCC-LISN-50/250-25-2-01	PRE0186446	01/23/2021	01/23/2020
UL AUTOMATION SOFTWARE					
Radiated Software	UL	UL EMC	Ver 9.5, Mar 06, 2020		
Conducted Software	UL	UL EMC	2020.2.26		
AC Line Conducted Software	UL	UL EMC	Ver 9.5, February 21, 2020		

*Testing is completed before equipment expiration date.

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.

PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
2.4GHz Band						
HDR4	1.000	1.000	1.000	100.00%	0.00	0.010
HDR8	1.000	1.000	1.000	100.00%	0.00	0.010
HDR4 TxBF	1.000	1.000	1.000	100.00%	0.00	0.010
HDR8 TxBF	1.000	1.000	1.000	100.00%	0.00	0.010

The figure displays four screenshots of the Agilent Spectrum Analyzer software interface, showing the results of HDR 4, HDR 8, HDR 4 TxBF, and HDR 8 TxBF measurements. Each screenshot includes a frequency spectrum plot, measurement parameters, and a table of results.

HDR 4: The plot shows a peak at 2.404 GHz. The measurement parameters are: Center Freq 2.404000000 GHz, Res BW 8 MHz, #VBW 50 MHz, Sweep 100.0 ms (1001 pts), Span 0 Hz, CF Step 8.000000 MHz, Man. The table of results shows: ΔMkr1 46.70 ms, -0.018 dB, 46.70 ms (Δ), -0.018 dB, 26.60 ms (Δ), 10.717 dBm.

HDR 8: The plot shows a peak at 2.404 GHz. The measurement parameters are: Center Freq 2.404000000 GHz, Res BW 8 MHz, #VBW 50 MHz, Sweep 100.0 ms (1001 pts), Span 0 Hz, CF Step 8.000000 MHz, Man. The table of results shows: ΔMkr1 45.50 ms, 0.001 dB, 45.50 ms (Δ), 0.001 dB, 27.60 ms (Δ), 11.358 dBm.

HDR 4 TxBF: The plot shows a peak at 2.404 GHz. The measurement parameters are: Center Freq 2.404000000 GHz, Res BW 8 MHz, #VBW 50 MHz, Sweep 100.0 ms (1001 pts), Span 0 Hz, CF Step 8.000000 MHz, Man. The table of results shows: ΔMkr1 56.10 ms, 0.014 dB, 56.10 ms (Δ), 0.014 dB, 26.60 ms (Δ), 11.018 dBm.

HDR 8 TxBF: The plot shows a peak at 2.404 GHz. The measurement parameters are: Center Freq 2.404000000 GHz, Res BW 8 MHz, #VBW 50 MHz, Sweep 100.0 ms (1001 pts), Span 0 Hz, CF Step 8.000000 MHz, Man. The table of results shows: ΔMkr1 50.30 ms, -0.030 dB, 50.30 ms (Δ), -0.030 dB, 26.60 ms (Δ), 11.139 dBm.

9.2. 99% BANDWIDTH LIMITS

None; for reporting purposes only.


RESULTS

Only High Power modes result is reported, it covers all Low Power modes. Only Mid channel plot is reported to show setting parameter complies with testing method/procedure.

9.2.1. HIGH POWER HDR (HDR4)


ANT 4

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2404	2.3123
Middle	2441	2.3129
High	2478	2.3424

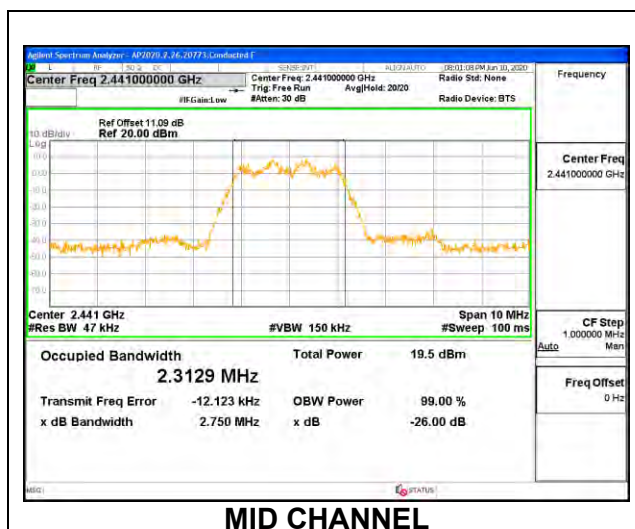

ANT 3


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2404	2.3314
Middle	2441	2.3317
High	2478	2.3184

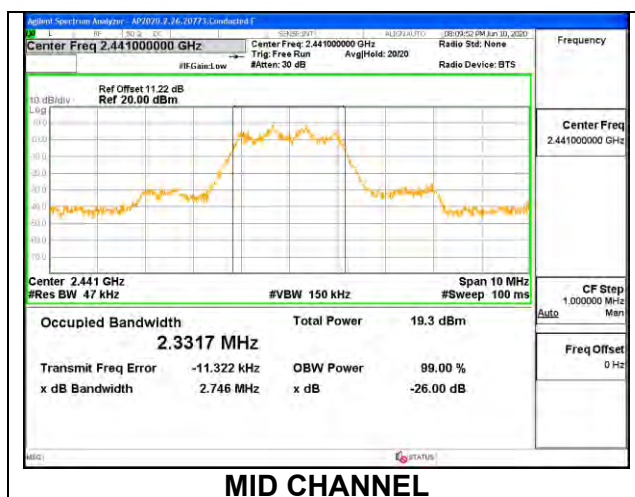

9.2.2. HIGH POWER HDR (HDR8)


ANT 4

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2404	4.6887
Middle	2441	4.7683
High	2478	4.7902

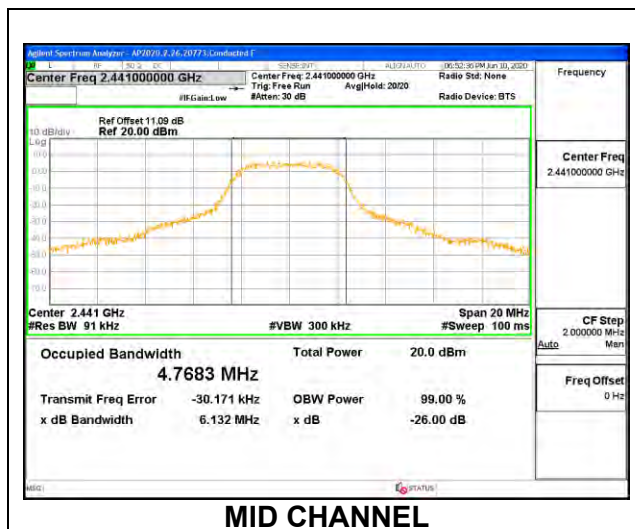



ANT 3

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2404	4.7286
Middle	2441	4.7418
High	2478	4.7103

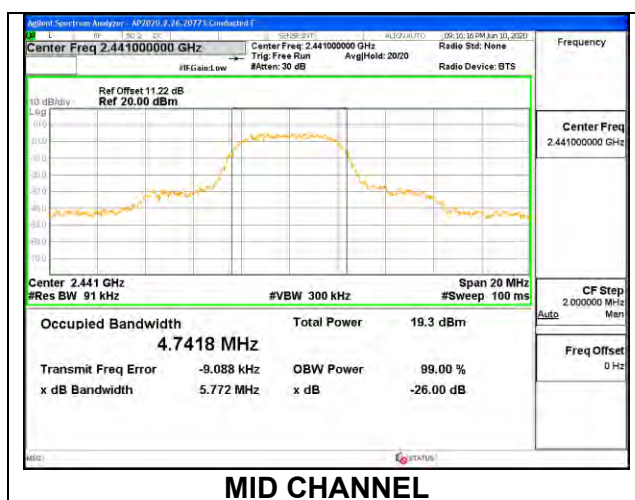

9.2.3. HIGH POWER HDR TXBF (HDR4)


Channel	Frequency (MHz)	99% Bandwidth ANT 4 (MHz)	99% Bandwidth ANT 3 (MHz)
Low	2404	2.3375	2.3297
Mid	2441	2.3217	2.3318
High	2478	2.3207	2.3191

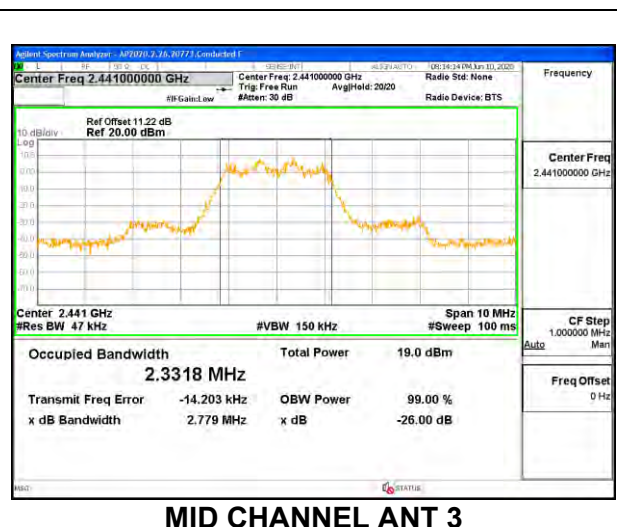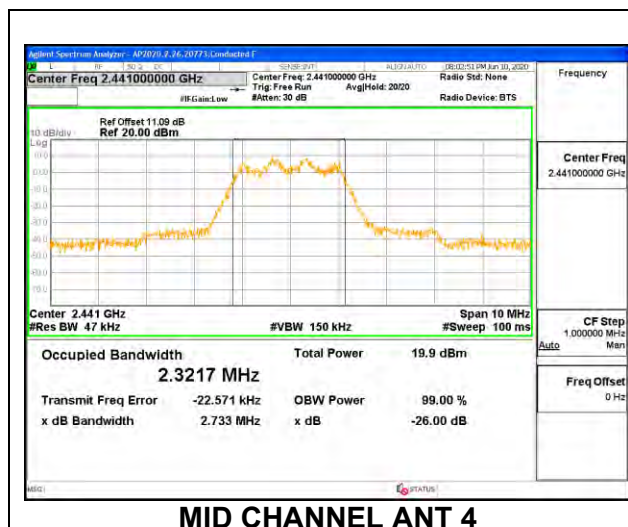

Note: Test procedures and setting on beamforming are same as HDR normal mode

9.2.4. HIGH POWER HDR TXBF (HDR8)

Channel	Frequency (MHz)	99% Bandwidth ANT 4 (MHz)	99% Bandwidth ANT 3 (MHz)
Low	2404	4.7238	4.7586
Mid	2441	4.6767	4.7765
High	2478	4.6990	4.7055

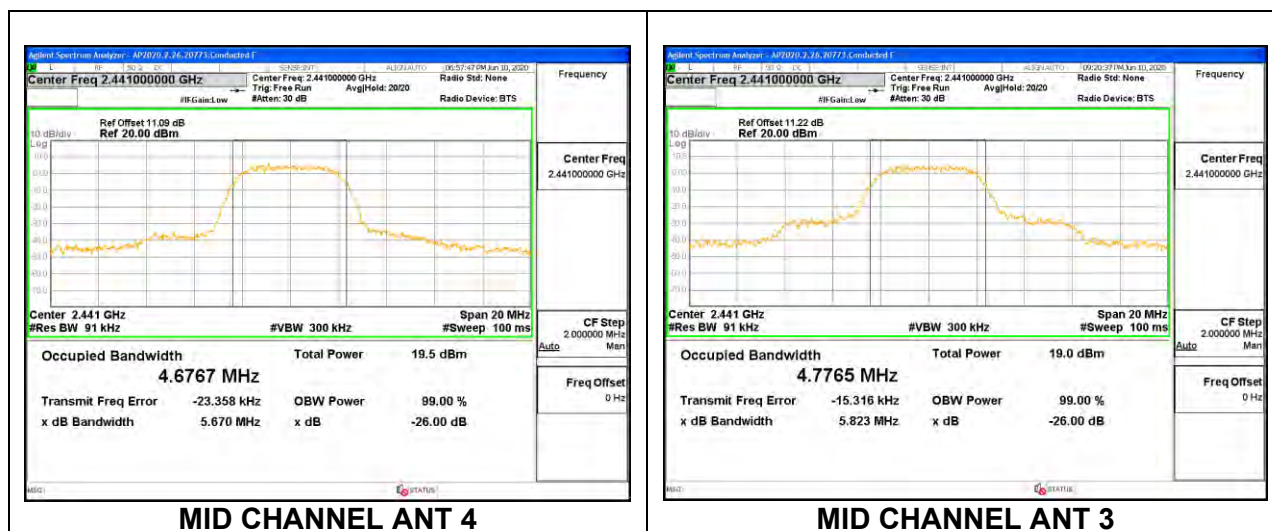

Note: Test procedures and setting on beamforming are same as HDR normal mode

9.3. 6 dB BANDWIDTH

LIMITS

FCC §15.407 (e)

RSS-247 5.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS


The 6dB bandwidth was measured for the narrowest bandwidth mode, High Power HDR4, to demonstrate compliance with the minimum required bandwidth of 500 kHz. Other modes were not tested as their bandwidth is greater than the High Power HDR4 mode, as demonstrated by the 99% bandwidth measurements performed on all modes.

Only Mid channel plot is reported to show setting parameter complies with testing method/procedure.

9.3.1. HIGH POWER HDR (HDR4)


ANT 4

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2404	2.079	0.5
Middle	2441	2.067	0.5
High	2478	2.097	0.5

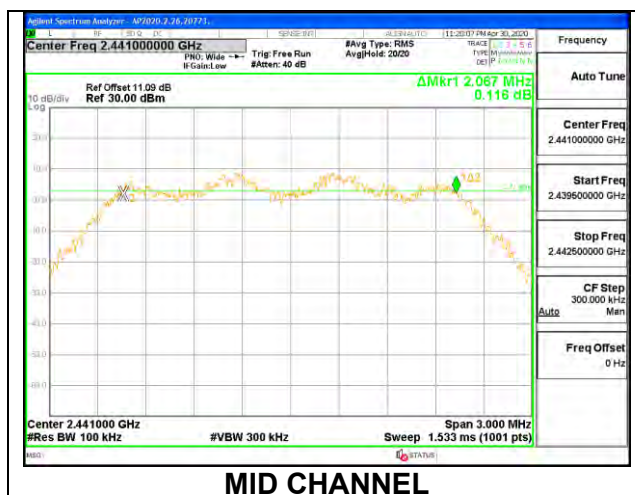

ANT 3

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2404	2.055	0.5
Middle	2441	2.061	0.5
High	2478	2.082	0.5

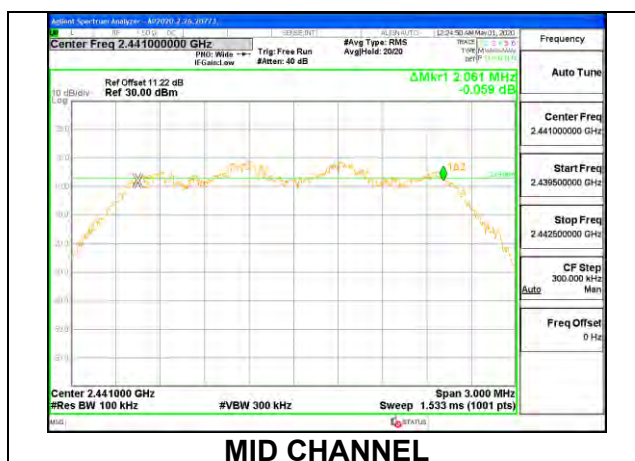

9.4. OUTPUT POWER

LIMITS

FCC §15.247 (b) (3)

RSS-247 5.4 (d)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output is connected to a power meter with wideband power sensor.

The cable assembly insertion loss of 10.5 dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the power meter to allow for a peak reading of power.

DIRECTIONAL ANTENNA GAIN

For 1 TX:

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

For 2 TX:

Tx chains are correlated for power due to the device supporting Beamforming. The directional gains are as follows:

Band (GHz)	ANT 4 Antenna Gain (dBi)	ANT 3 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)	Correlated Chains Directional Gain (dBi)
2.4	-1.90	0.40	-0.60	2.34

RESULTS

9.4.1. HIGH POWER HDR (HDR4)

ANT 4

Tested By:	20773
Date:	7/25/2020

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	14.41	30	-15.59
Middle	2441	14.45	30	-15.55
High	2478	14.39	30	-15.61

ANT 3

Tested By:	20773
Date:	7/25/2020

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	14.32	30	-15.68
Middle	2441	14.40	30	-15.60
High	2478	14.34	30	-15.66

9.4.2. HIGH POWER HDR (HDR8)

ANT 4

Tested By:	20773
Date:	7/25/2020

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	15.27	30	-14.73
Middle	2441	15.33	30	-14.67
High	2478	15.41	30	-14.59

ANT 3

Tested By:	20773
Date:	7/25/2020

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	15.43	30	-14.57
Middle	2441	15.37	30	-14.63
High	2478	15.24	30	-14.76

9.4.3. LOW POWER HDR (HDR4)

ANT 4

Tested By:	20773
Date:	7/25/2020

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	8.62	30	-21.38
Middle	2441	8.67	30	-21.33
High	2478	8.74	30	-21.26

ANT 3

Tested By:	20773
Date:	7/25/2020

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	8.65	30	-21.4
Middle	2441	8.52	30	-21.5
High	2478	8.66	30	-21.3

9.4.4. LOW POWER HDR (HDR8)

ANT 4

Tested By:	20773
Date:	7/25/2020

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	9.73	30	-20.27
Middle	2441	9.68	30	-20.32
High	2478	9.60	30	-20.40

ANT 3

Tested By:	20773
Date:	7/25/2020

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	9.72	30	-20.28
Middle	2441	9.70	30	-20.30
High	2478	9.63	30	-20.37

9.4.5. HIGH POWER HDR TXBF (HDR4)

ANT 4 + ANT 3

Tested By:	20773
Date:	7/25/2020

Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2404	14.04	14.11	17.09	30	-12.91
Middle	2441	14.2	14.09	17.16	30	-12.84
High	2478	14.04	14.13	17.10	30	-12.90

9.4.6. HIGH POWER HDR TXBF (HDR8)

ANT 4 + ANT 3

Tested By:	20773
Date:	7/25/2020

Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2404	15.03	15.12	18.09	30	-11.91
Middle	2441	15.19	15.11	18.16	30	-11.84
High	2478	15.04	15.1	18.08	30	-11.92

9.4.7. LOW POWER HDR TXBF (HDR4)

ANT 4 + ANT 3

Tested By:	20773
Date:	7/25/2020

Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2404	8.73	8.51	11.63	30	-18.37
Middle	2441	8.64	8.66	11.66	30	-18.34
High	2478	8.68	8.6	11.65	30	-18.35

9.4.8. LOW POWER HDR TXBF (HDR8)

ANT 4 + ANT 3

Tested By:	20773
Date:	7/25/2020

Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2404	8.57	8.66	11.63	30	-18.37
Middle	2441	8.51	8.72	11.63	30	-18.37
High	2478	8.69	8.55	11.63	30	-18.37

9.5. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter with wideband power sensor

The cable assembly insertion loss of 10.5 dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the power meter to allow for a gated average reading of power.

RESULTS

9.5.1. HIGH POWER HDR (HDR4)

ANT 4

Tested By:	20773
Date:	7/25/2020

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	11.65
Middle	2441	11.68
High	2478	11.60

ANT 3

Tested By:	20773
Date:	7/25/2020

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	11.54
Middle	2441	11.63
High	2478	11.60

9.5.2. HIGH POWER HDR (HDR8)

ANT 4

Tested By:	20773
Date:	7/25/2020

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	11.59
Middle	2441	11.66
High	2478	11.74

ANT 3

Tested By:	20773
Date:	7/25/2020

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	11.72
Middle	2441	11.64
High	2478	11.55

9.5.3. LOW POWER HDR (HDR4)

ANT 4

Tested By:	20773
Date:	7/25/2020

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	6.10
Middle	2441	6.13
High	2478	6.21

ANT 3

Tested By:	20773
Date:	7/25/2020

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	6.11
Middle	2441	6.04
High	2478	6.13

9.5.4. LOW POWER HDR (HDR8)

ANT 4

Tested By:	20773
Date:	7/25/2020

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	6.21
Middle	2441	6.19
High	2478	6.15

ANT 3

Tested By:	20773
Date:	7/25/2020

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	6.12
Middle	2441	6.06
High	2478	6.15

9.5.5. HIGH POWER HDR TXBF (HDR4)

ANT 4 + ANT 3

Tested By:	20773
Date:	7/25/2020

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2404	11.55	11.63	14.60
Middle	2441	11.71	11.60	14.67
High	2478	11.54	11.64	14.60

9.5.6. HIGH POWER HDR TXBF (HDR8)

ANT 4 + ANT 3

Tested By:	20773
Date:	7/25/2020

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2404	11.56	11.63	14.61
Middle	2441	11.69	11.52	14.62
High	2478	11.67	11.70	14.70

9.5.7. LOW POWER HDR TXBF (HDR4)

ANT 4 + ANT 3

Tested By:	20773
Date:	7/25/2020

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2404	6.22	6.04	9.14
Middle	2441	6.13	6.15	9.15
High	2478	6.15	6.10	9.14

9.5.8. LOW POWER HDR TXBF (HDR8)

ANT 4 + ANT 3

Tested By:	20773
Date:	7/25/2020

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2404	6.03	6.11	9.08
Middle	2441	6.02	6.20	9.12
High	2478	6.18	6.08	9.14

Note: Test procedures and setting on beamforming are same as HDR normal mode

9.6. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

RSS-247 (5.2) (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


RESULTS

Only Mid channel plot is reported to show setting parameter complies with testing method/procedure.

9.6.1. HIGH POWER HDR (HDR4)


ANT 4

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-4.523	8	-12.52
Middle	2441	-4.444	8	-12.44
High	2478	-4.780	8	-12.78

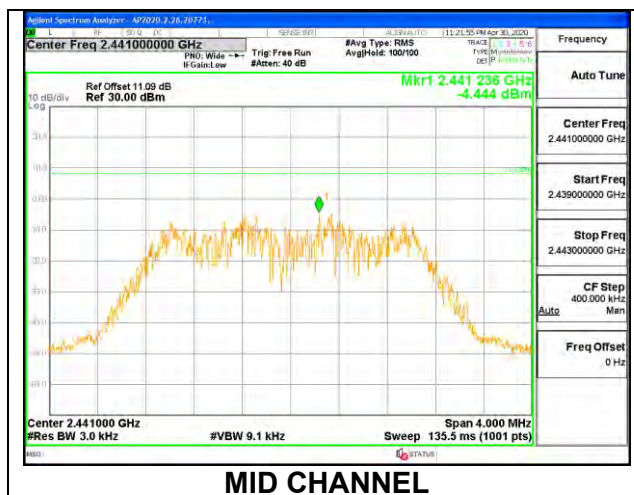

ANT 3


Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-4.700	8	-12.70
Middle	2441	-4.421	8	-12.42
High	2478	-4.589	8	-12.59

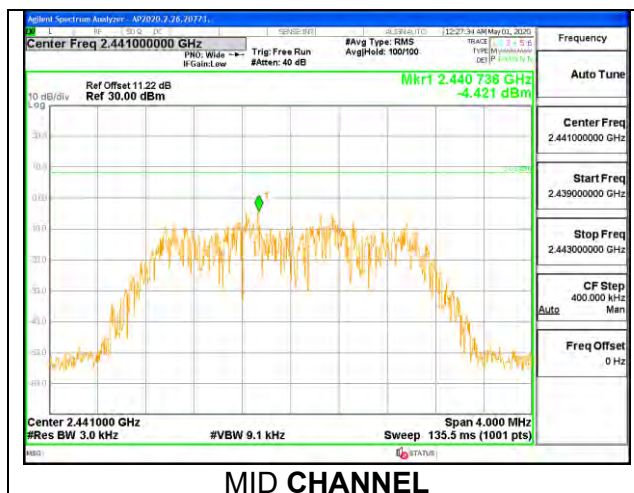

9.6.2. HIGH POWER HDR (HDR8)


ANT 4

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-7.295	8	-15.30
Middle	2441	-7.216	8	-15.22
High	2478	-7.129	8	-15.13

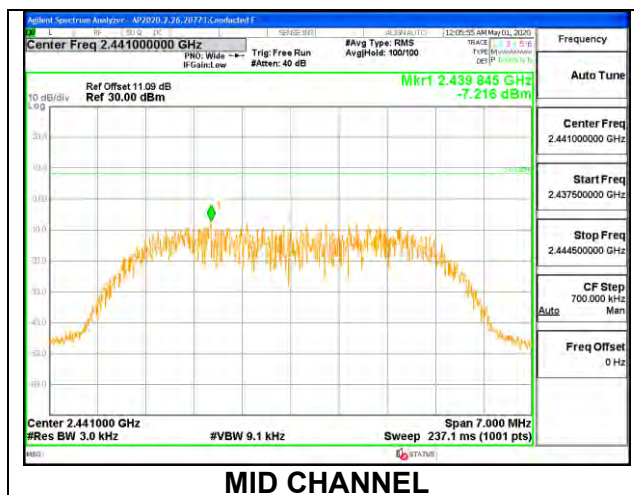

ANT 3


Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-7.306	8	-15.31
Middle	2441	-7.527	8	-15.53
High	2478	-7.661	8	-15.66

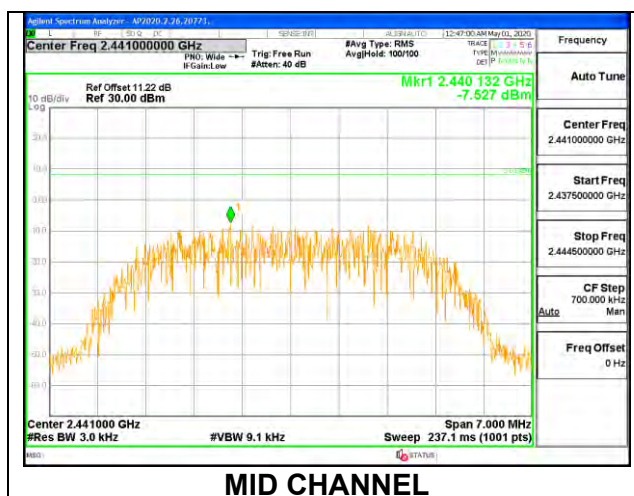

9.6.3. LOW POWER HDR (HDR4)


ANT 4

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-10.480	8	-18.48
Middle	2441	-10.282	8	-18.28
High	2478	-9.887	8	-17.89

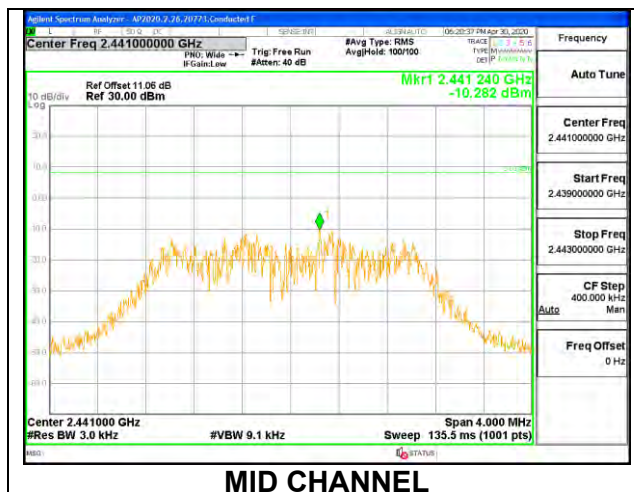

ANT 3


Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-10.352	8	-18.35
Middle	2441	-10.626	8	-18.63
High	2478	-10.228	8	-18.23

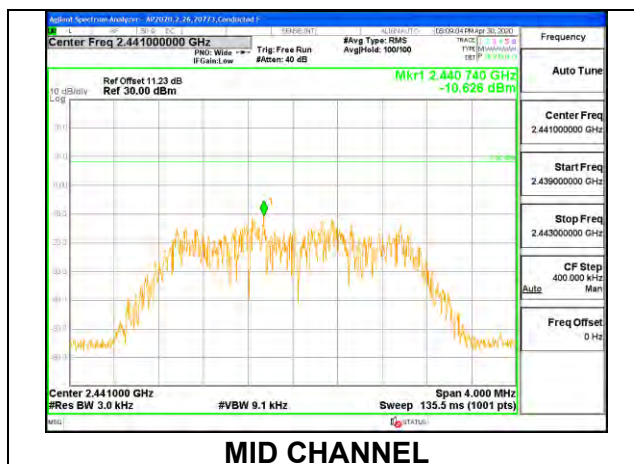

9.6.4. LOW POWER HDR (HDR8)


ANT 4

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-12.79	8	-20.79
Middle	2441	-12.89	8	-20.89
High	2478	-13.17	8	-21.17

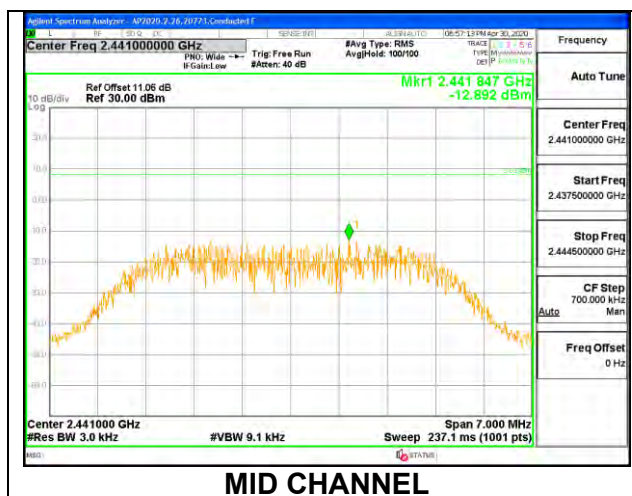

ANT 3

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-13.062	8	-21.06
Middle	2441	-13.255	8	-21.26
High	2478	-12.868	8	-20.87

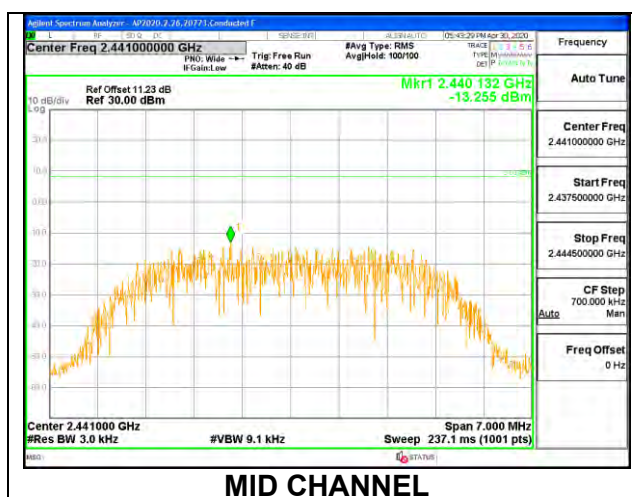


9.6.5. HIGH POWER HDR TXBF (HDR4)

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

PSD Results

Channel	Frequency (MHz)	ANT 4 Meas (dBm/ 3kHz)	ANT 3 Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Low	2404	-4.862	-4.647	-1.74	8.0	-9.7
Mid	2441	-4.314	-4.682	-1.48	8.0	-9.5
Hjigh	2478	-4.871	-4.614	-1.73	8.0	-9.7

Note: Test procedures and setting on beamforming are same as HDR normal mode

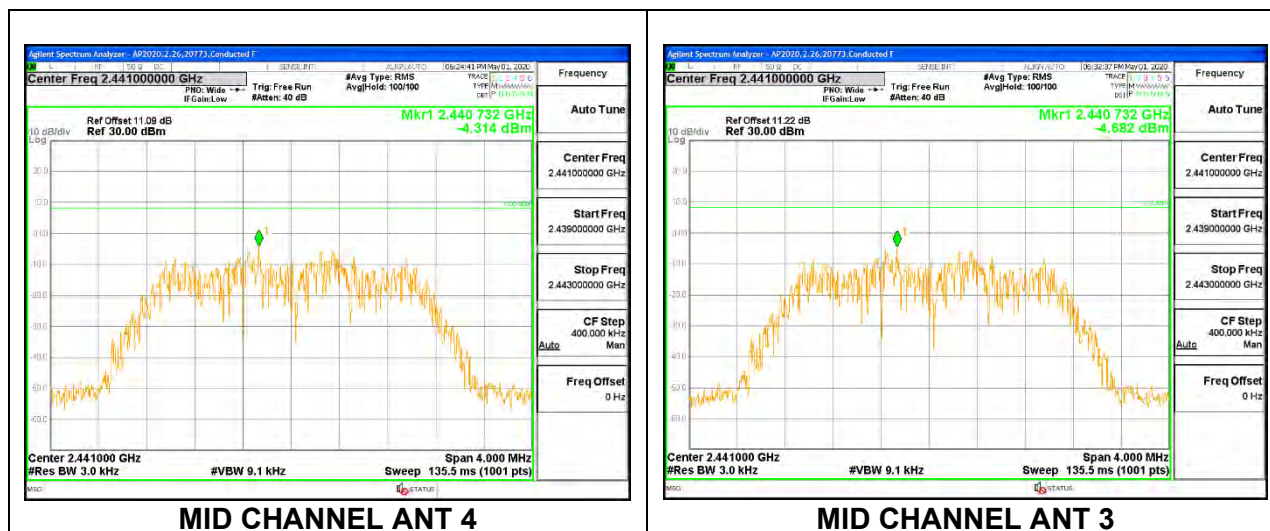


9.6.6. HIGH POWER HDR TXBF (HDR8)

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

PSD Results

Channel	Frequency (MHz)	ANT 4 Meas (dBm/ 3kHz)	ANT 3 Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Low	2404	-7.589	-7.376	-4.47	8.0	-12.5
Mid	2441	-7.067	-7.641	-4.33	8.0	-12.3
Hjigh	2478	-7.116	-6.983	-4.04	8.0	-12.0

Note: Test procedures and setting on beamforming are same as HDR normal mode


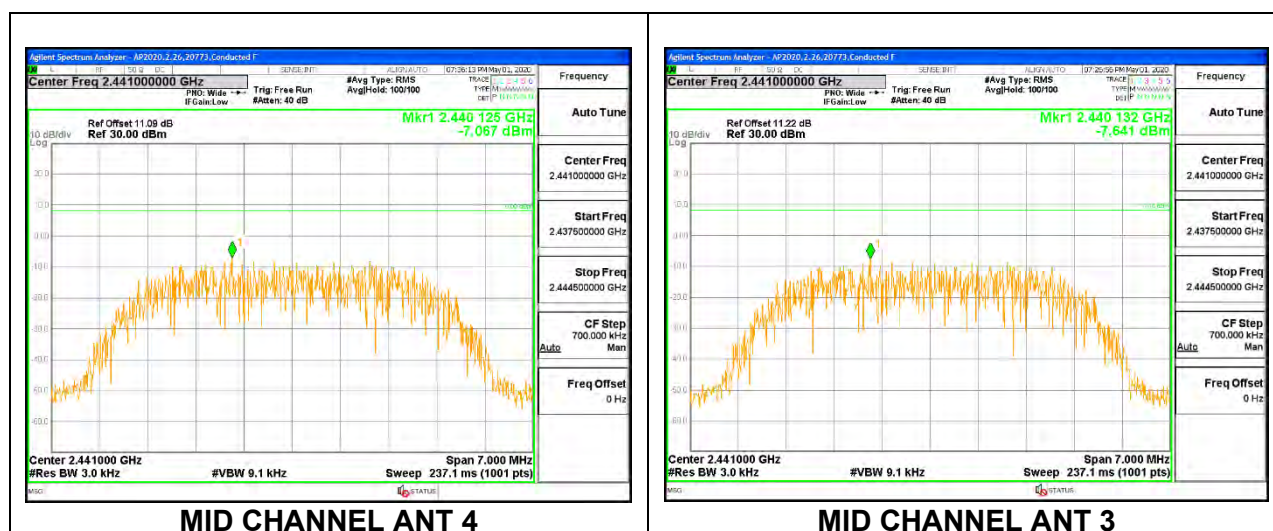


9.6.7. LOW POWER HDR TXBF (HDR4)

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

PSD Results

Channel	Frequency (MHz)	ANT 4 Meas (dBm/ 3kHz)	ANT 3 Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Low	2404	-9.911	-10.542	-7.20	8.0	-15.2
Mid	2441	-10.294	-10.271	-7.27	8.0	-15.3
Hjigh	2478	-10.245	-10.373	-7.30	8.0	-15.3

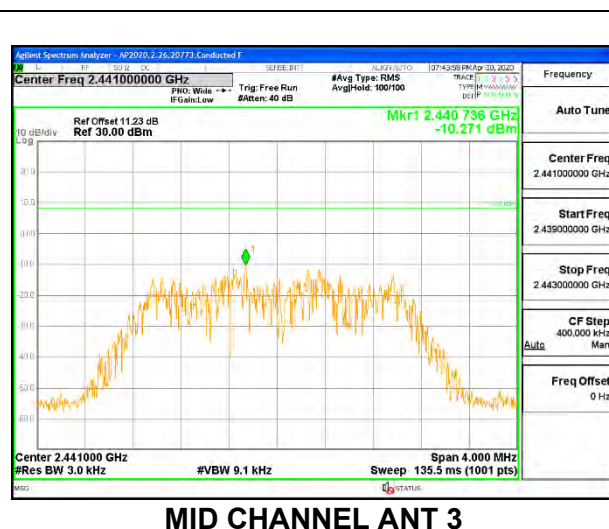
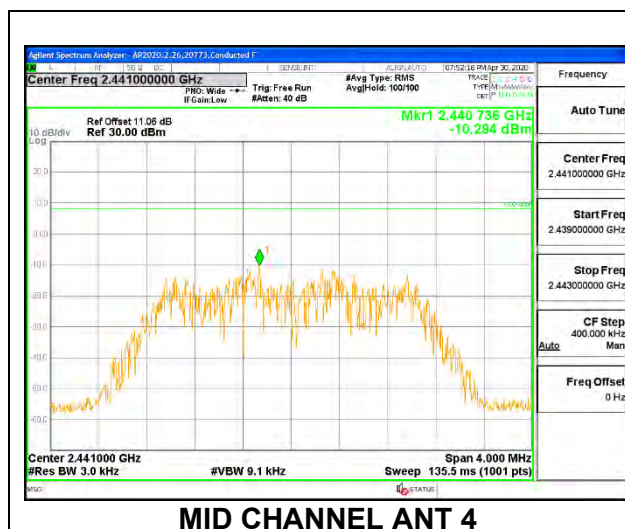


9.6.8. LOW POWER HDR TXBF (HDR8)

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

PSD Results

Channel	Frequency (MHz)	ANT 4 Meas (dBm/ 3kHz)	ANT 3 Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Low	2404	-13.231	-13.161	-10.19	8.0	-18.2
Mid	2441	-13.243	-13.068	-10.14	8.0	-18.1
Hjigh	2478	-13.122	-13.177	-10.14	8.0	-18.1

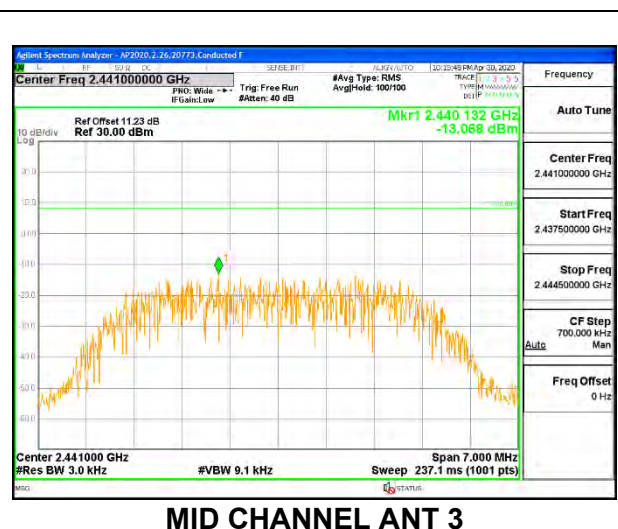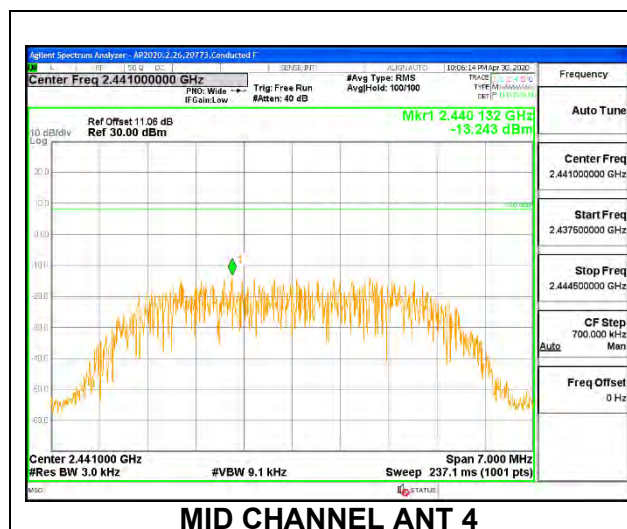

9.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

RSS-247 5.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.

RESULTS


9.7.1. HIGH POWER HDR (HDR4) ANT 4




LOW CHANNEL BANDEDGE



OUT-OF-BAND LOW CHANNEL

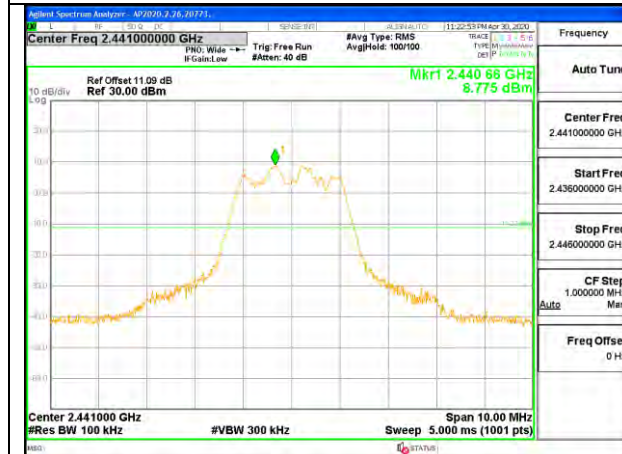

MID CHANNEL REFERENCE LEVEL

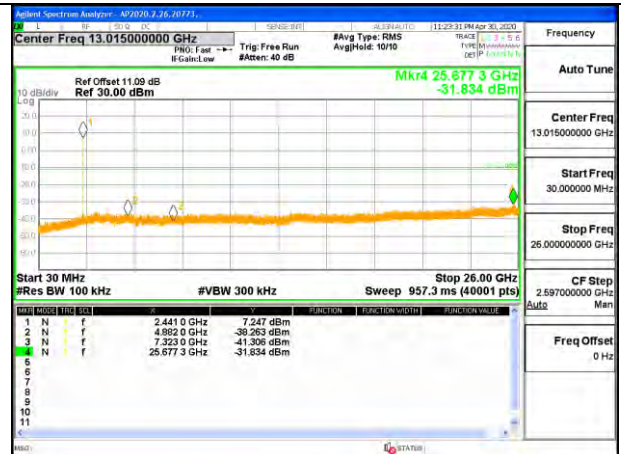

OUT-OF-BAND MID CHANNEL




HIGH CHANNEL BANDEDGE









OUT-OF-BAND HIGH CHANNEL

ANT 3






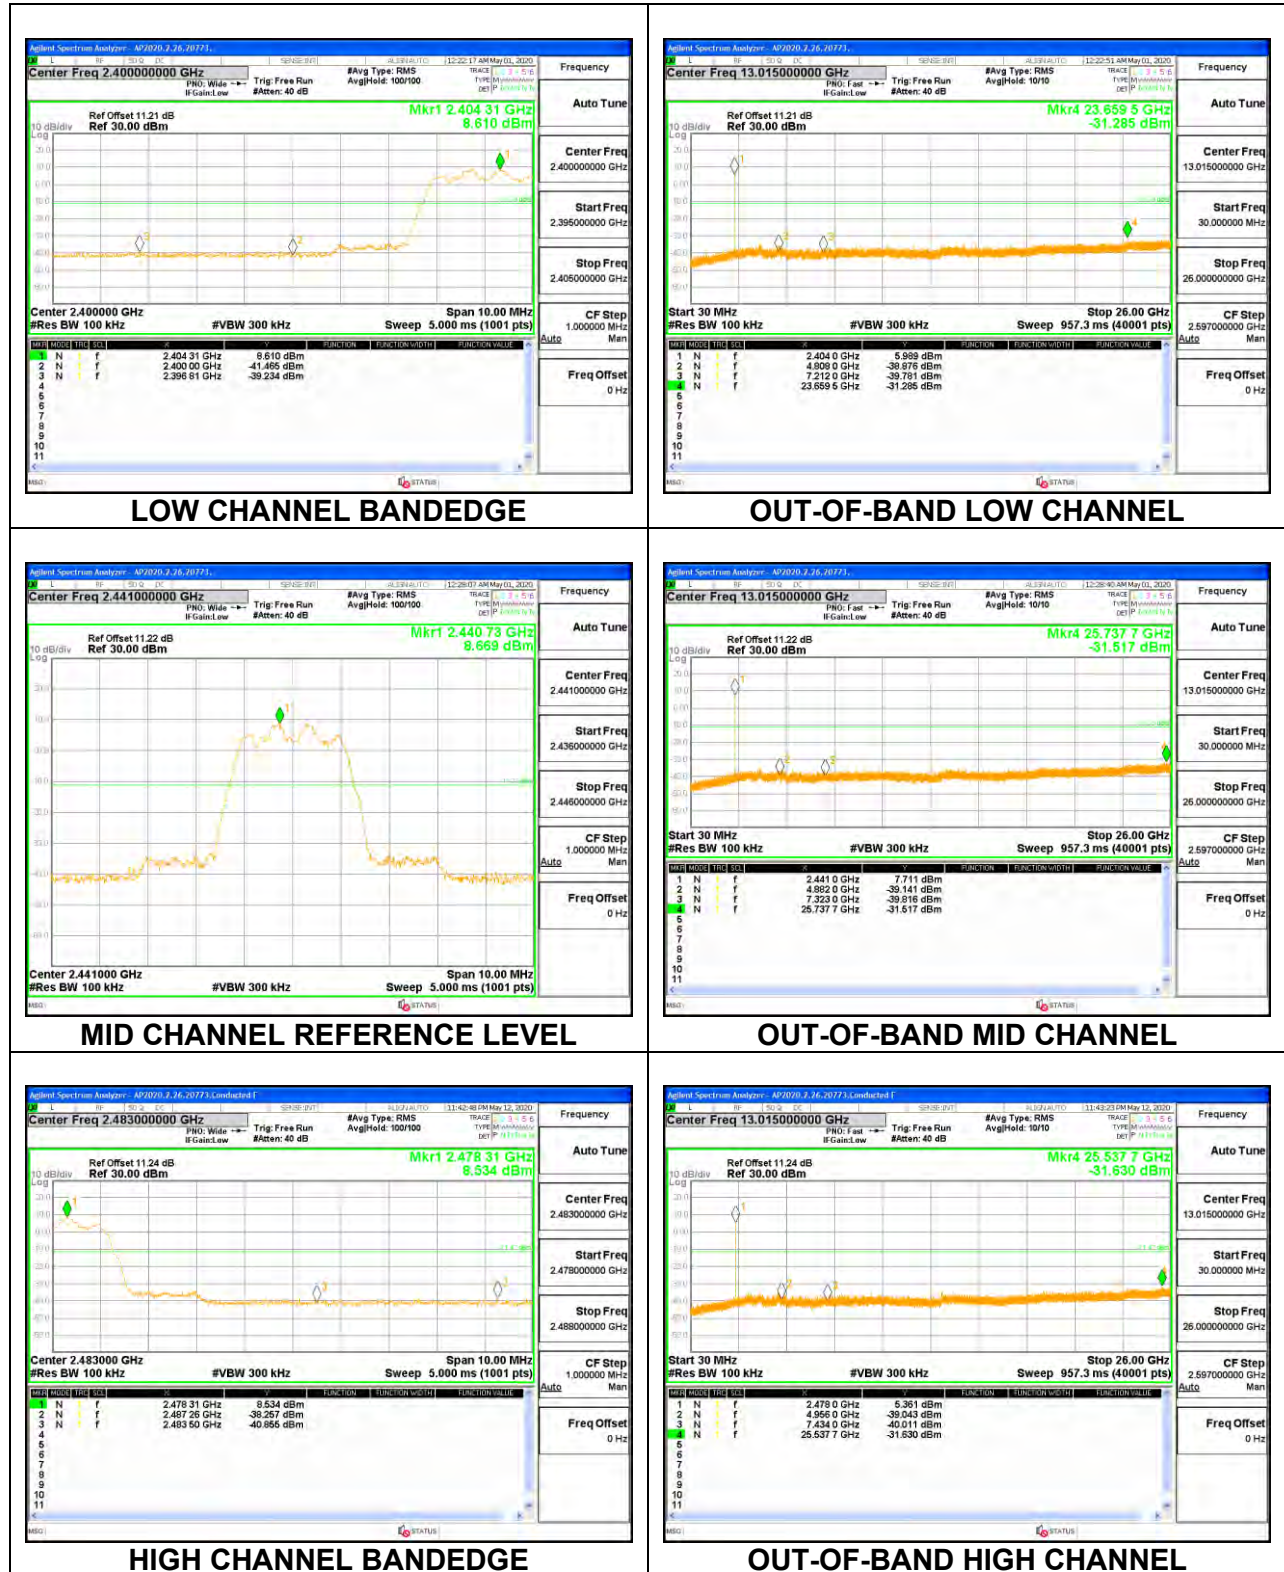


9.7.2. HIGH POWER HDR TXBF (HDR4)

ANT 4

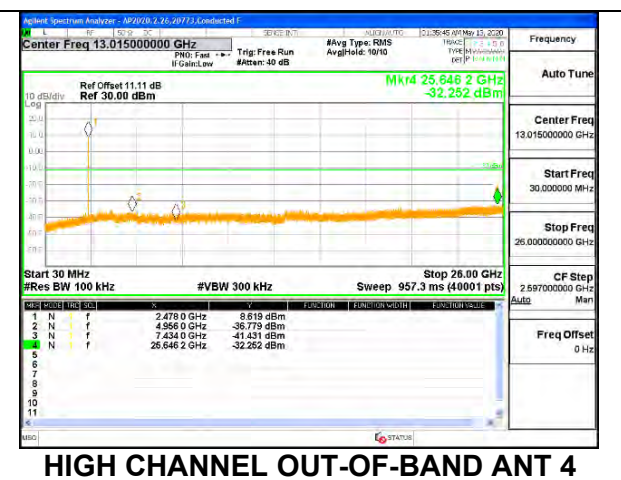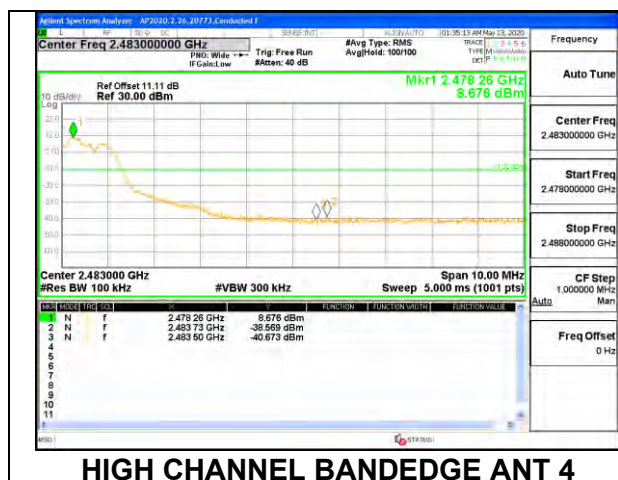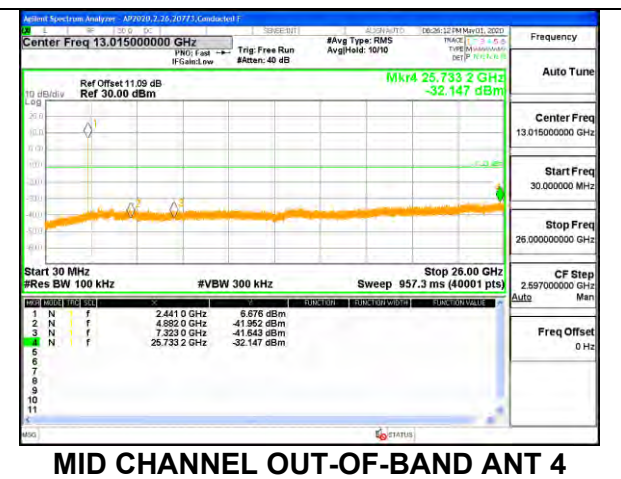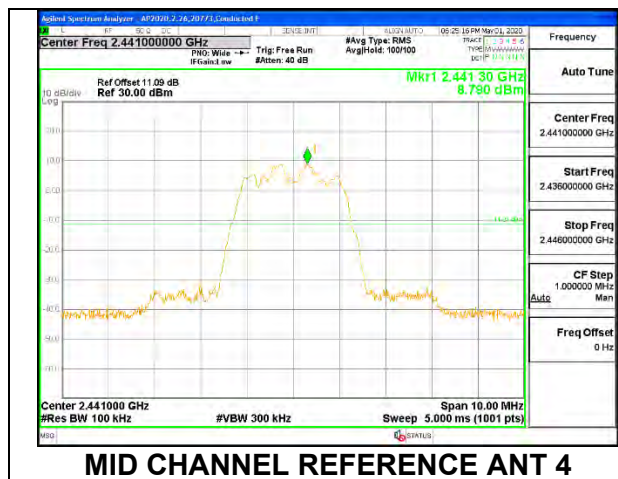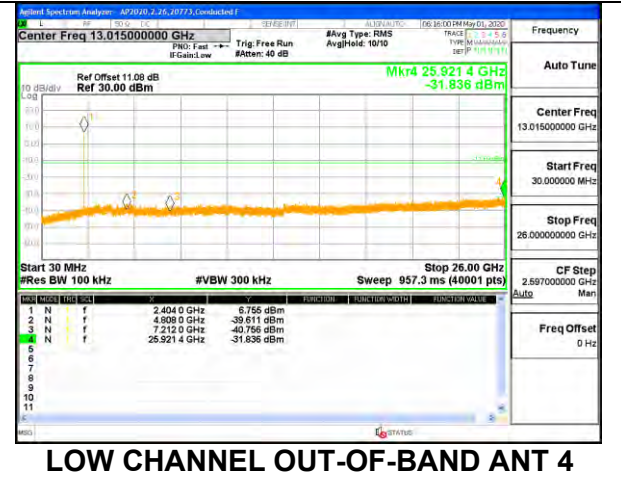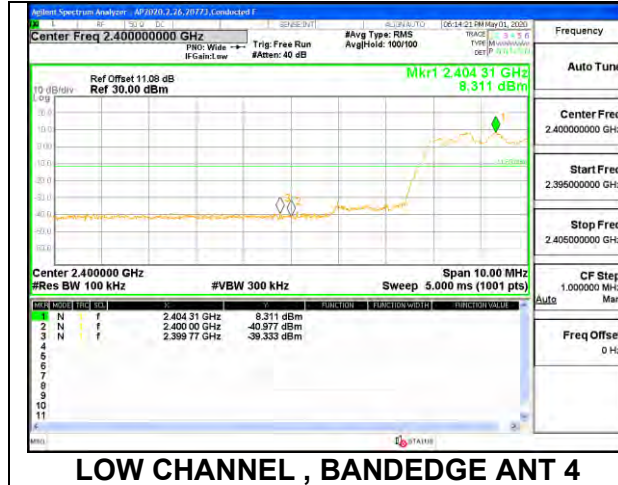

ANT 3

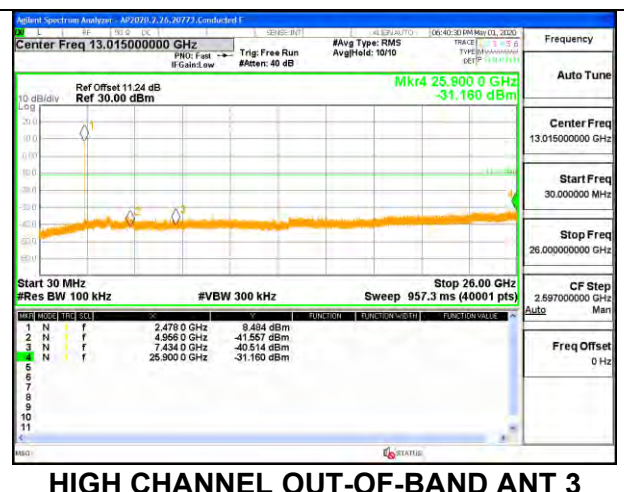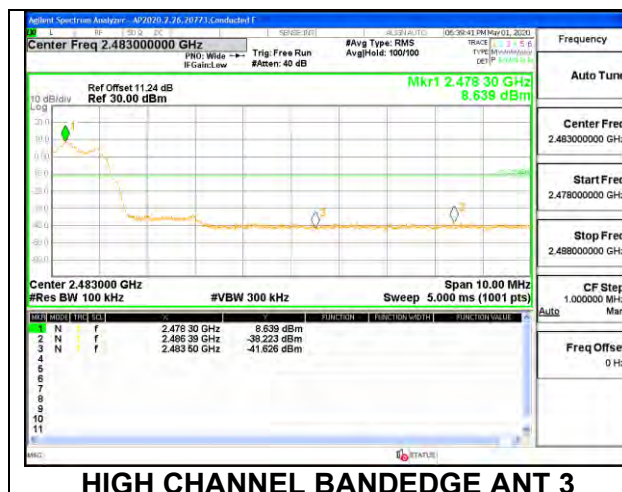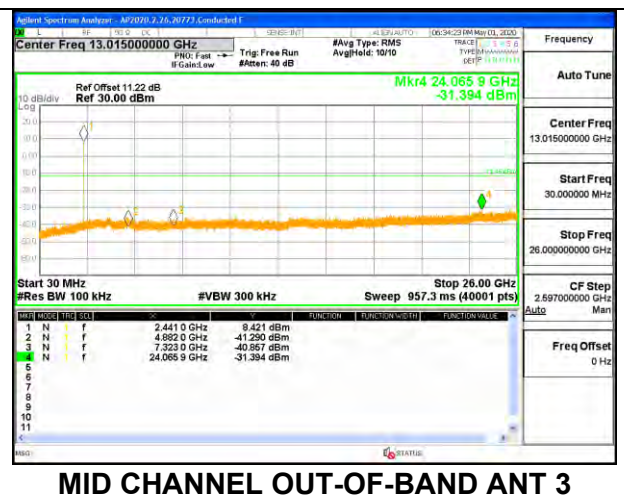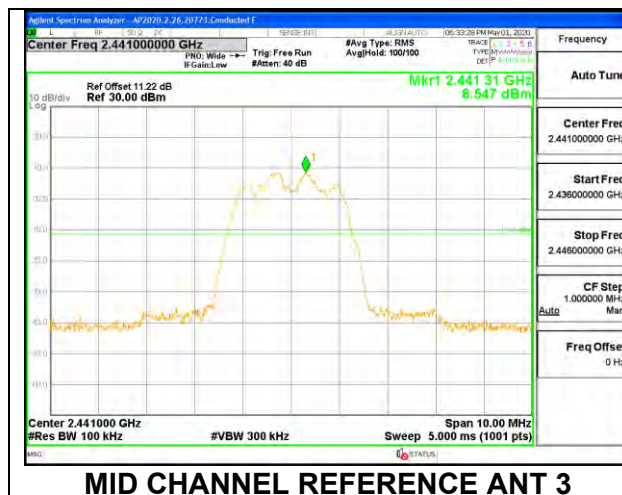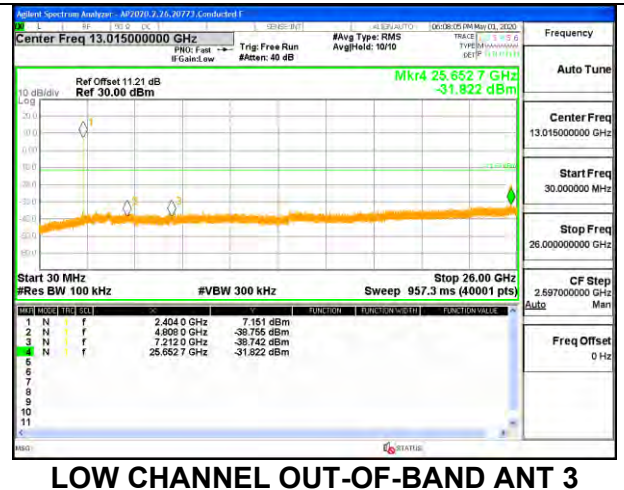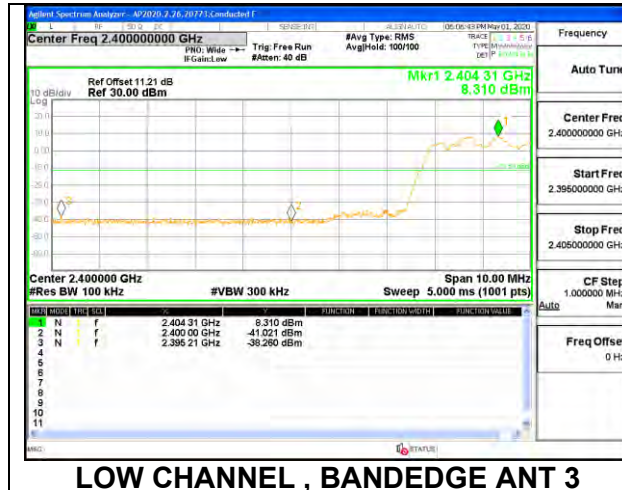


Note: Test procedures and setting on beamforming are same as HDR normal mode

9.7.3. HIGH POWER HDR (HDR8)

ANT 4




ANT 3

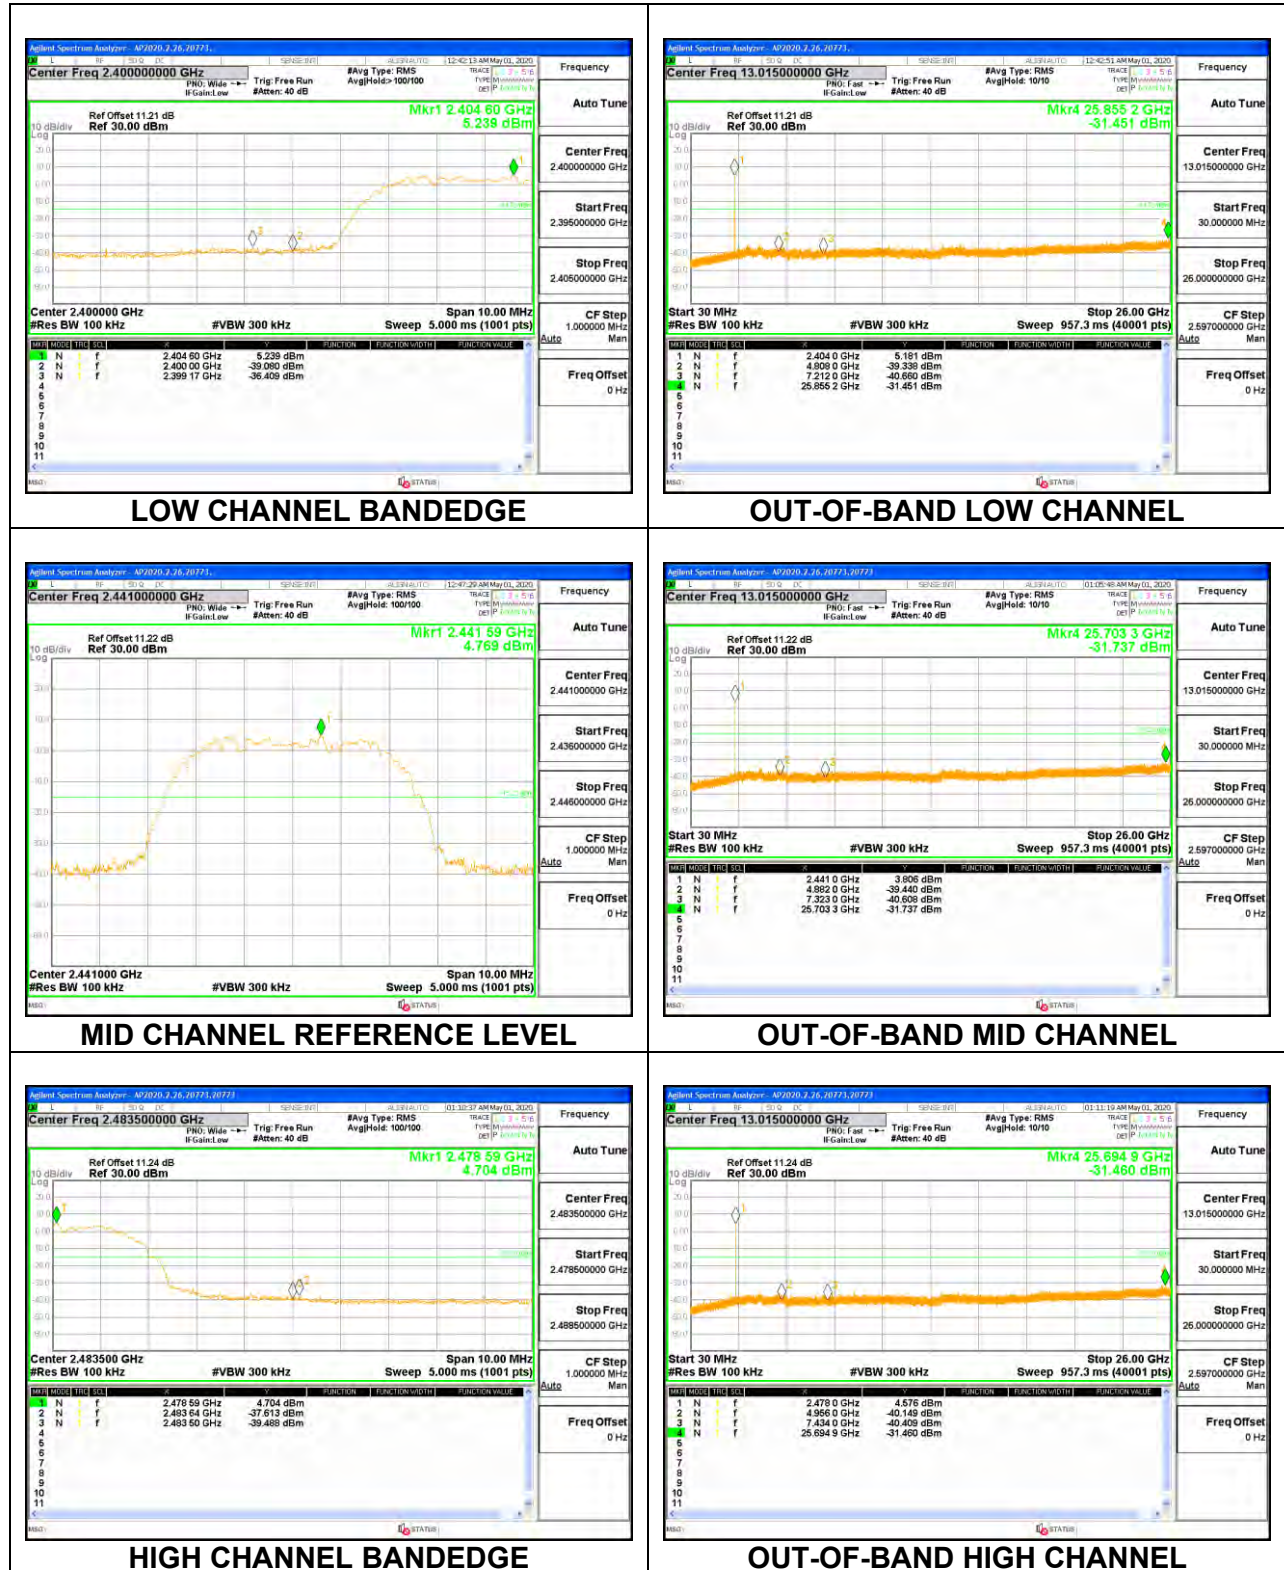


9.7.4. HIGH POWER HDR TXBF (HDR8)


ANT 4

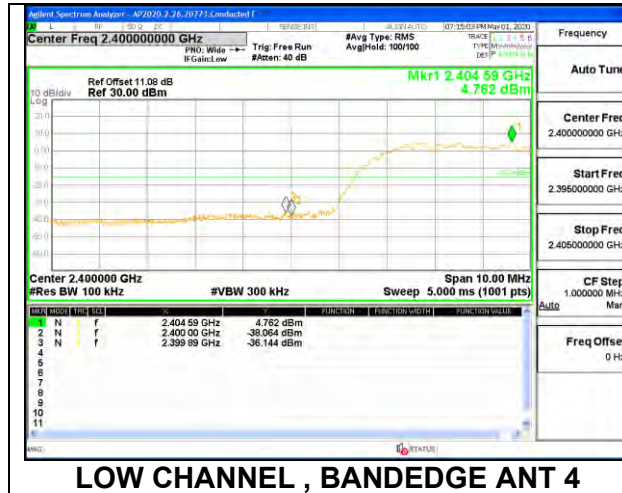


LOW CHANNEL , BANDEDGE ANT 4

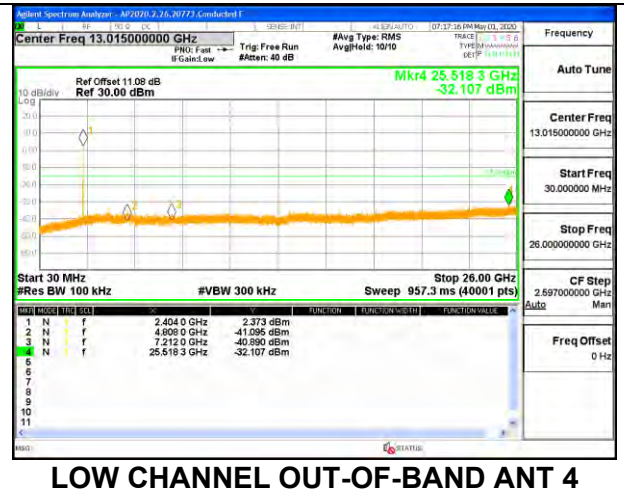


LOW CHANNEL OUT-OF-BAND ANT 4

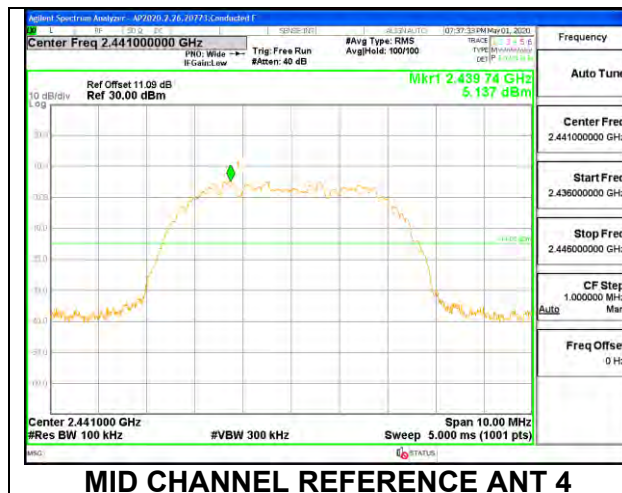


MID CHANNEL REFERENCE ANT 4

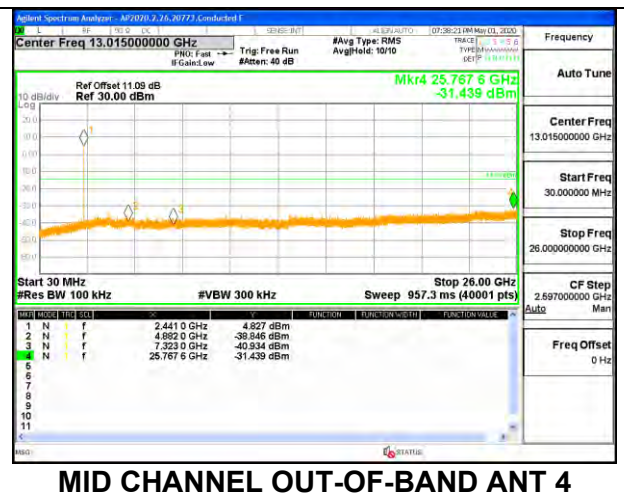

MID CHANNEL OUT-OF-BAND ANT 4

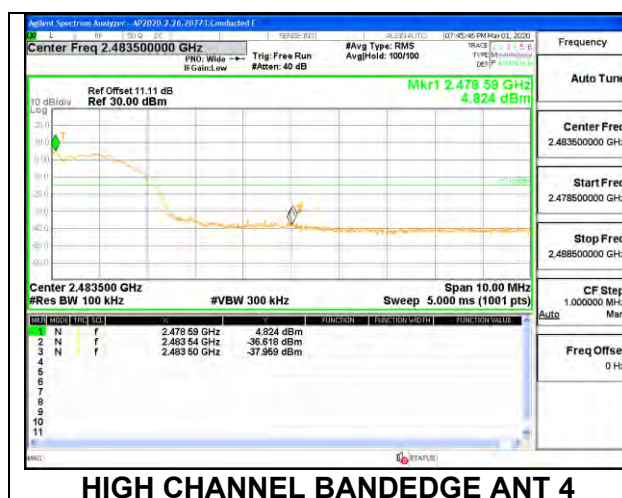

HIGH CHANNEL BANDEDGE ANT 4

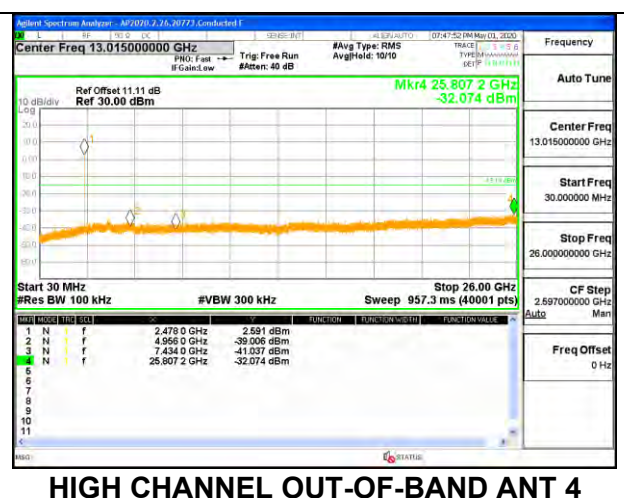

HIGH CHANNEL OUT-OF-BAND ANT 4

ANT 3



LOW CHANNEL BANDEDGE ANT 3



LOW CHANNEL OUT-OF-BAND ANT 3



MID CHANNEL REFERENCE ANT 3



MID CHANNEL OUT-OF-BAND ANT 3




HIGH CHANNEL BANDEDGE ANT 3




HIGH CHANNEL OUT-OF-BAND ANT 3

Note: Test procedures and setting on beamforming are same as HDR normal mode

9.7.5. LOW POWER HDR (HDR4) ANT 4

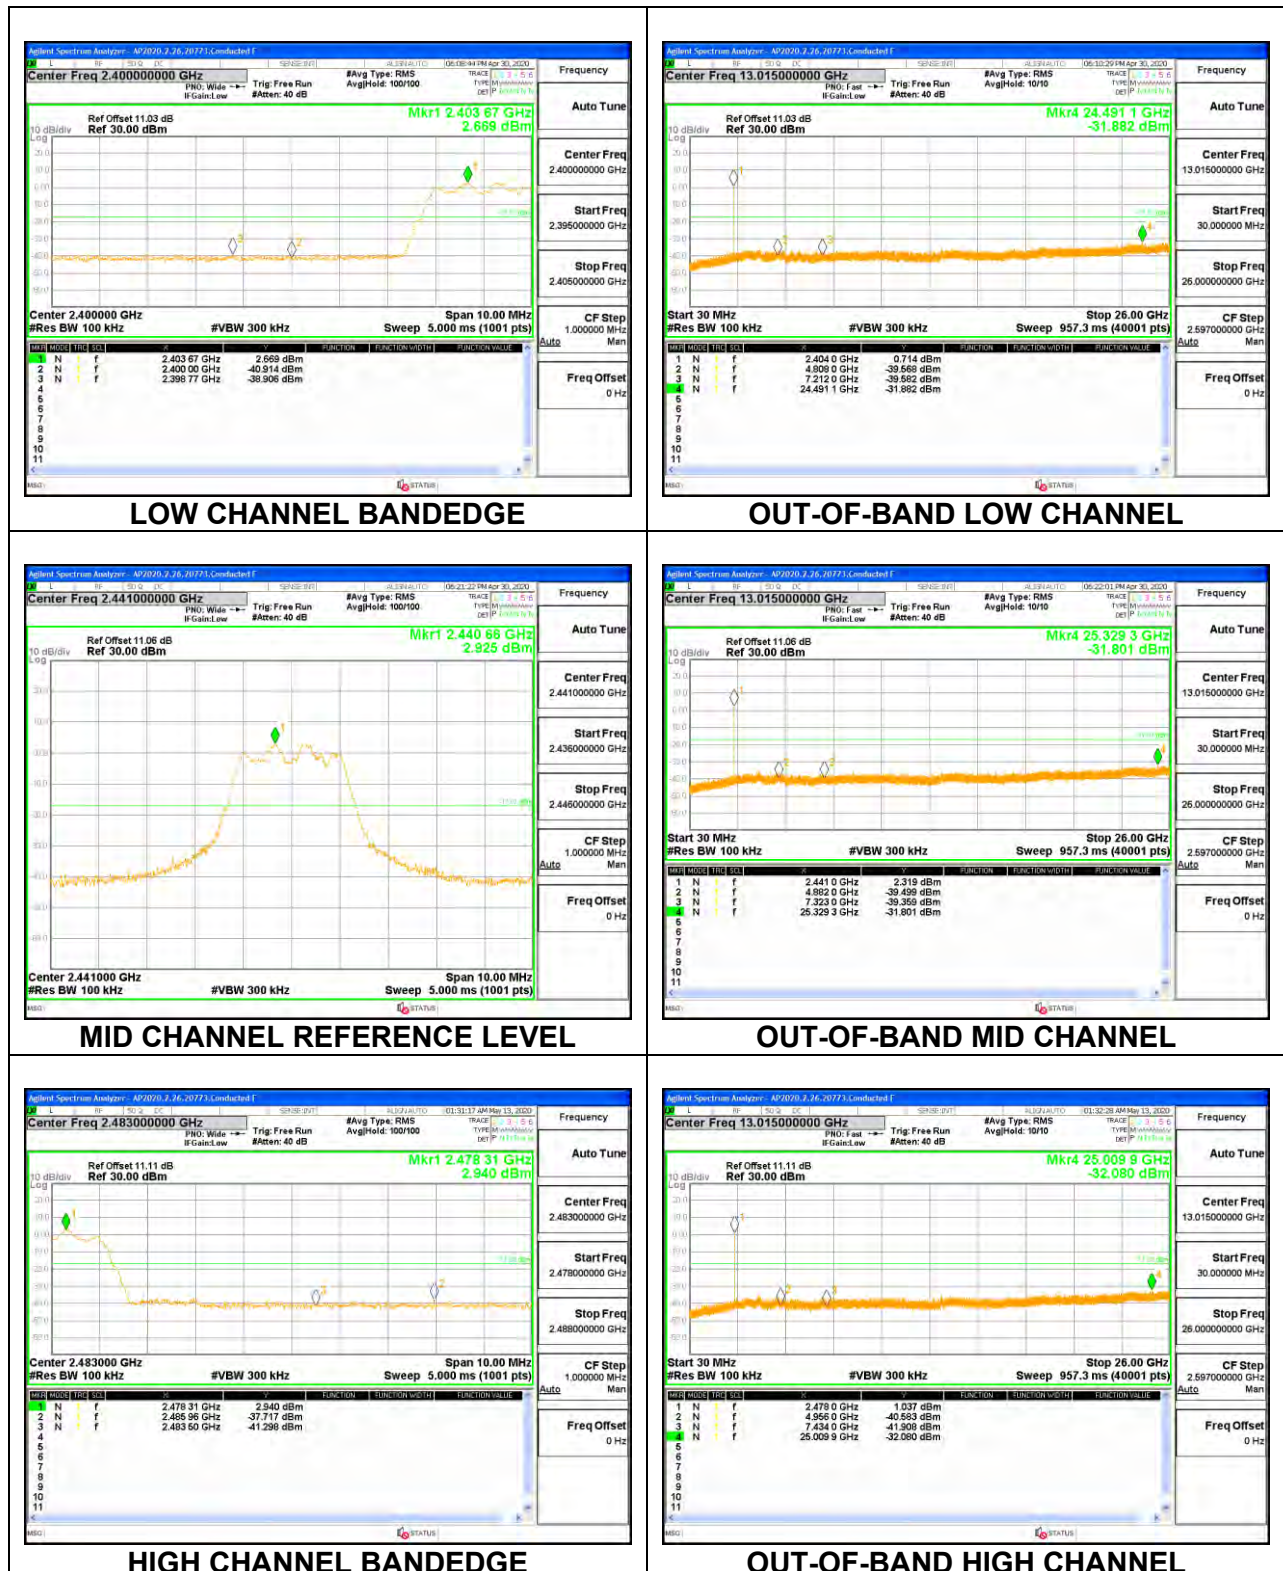


ANT 3

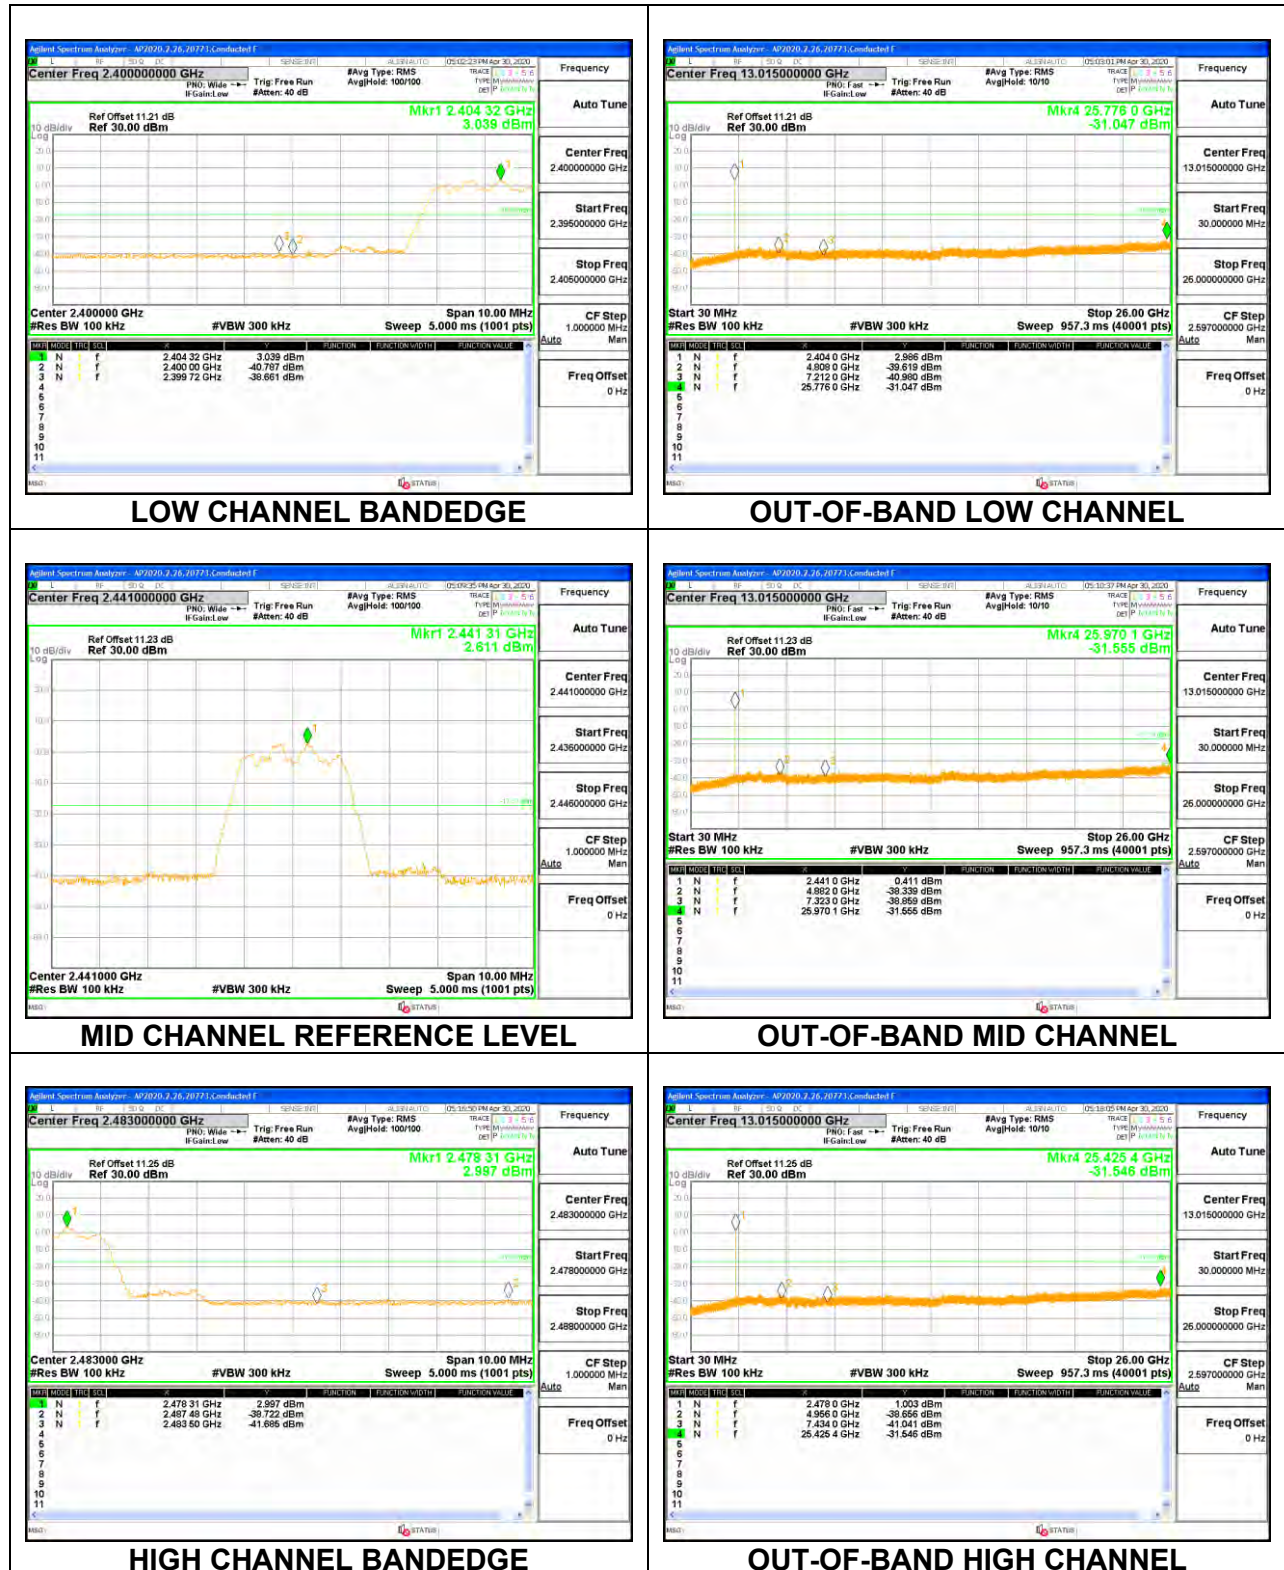


9.7.6. LOW POWER HDR TXBF (HDR4)


ANT 4

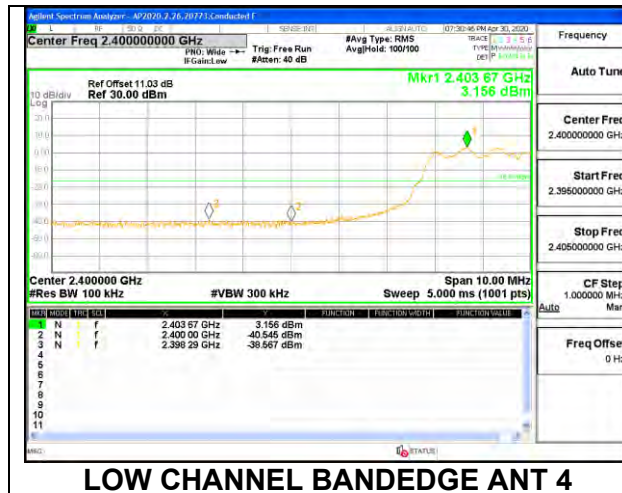


LOW CHANNEL BANDEDGE ANT 4

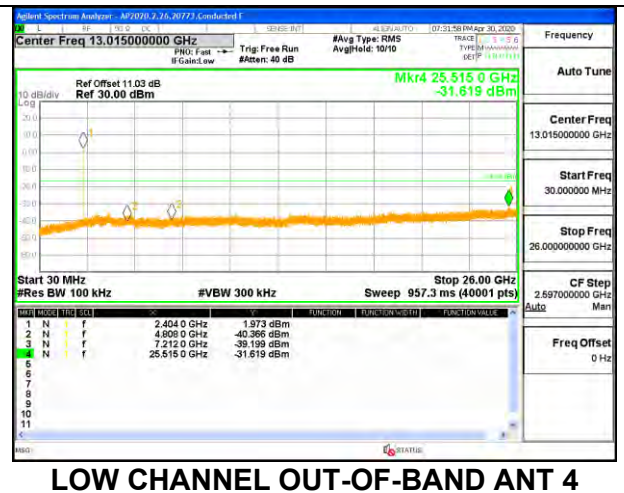


LOW CHANNEL OUT-OF-BAND ANT 4

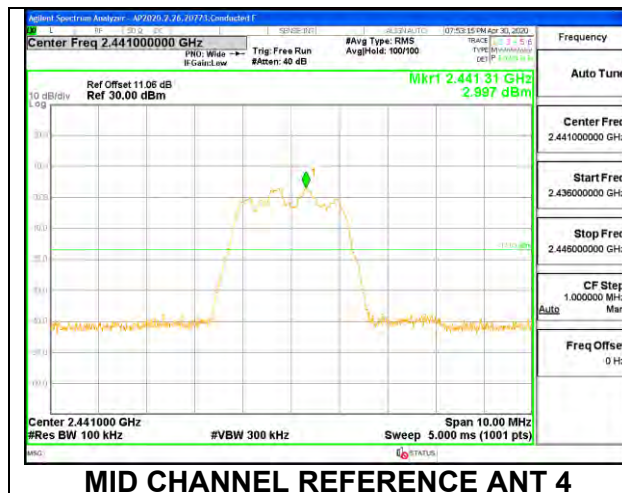


MID CHANNEL REFERENCE ANT 4

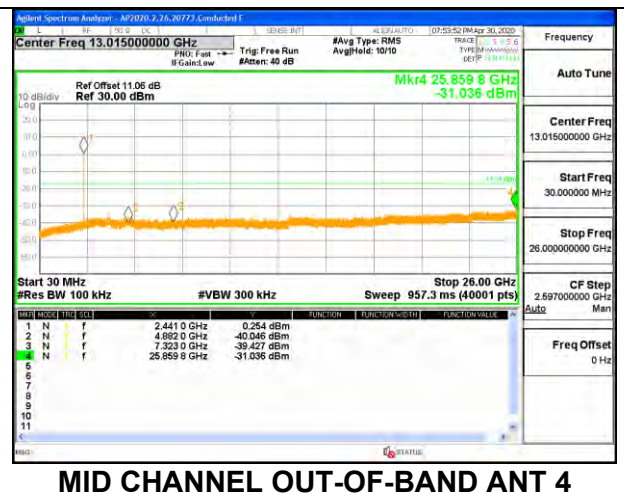

MID CHANNEL OUT-OF-BAND ANT 4

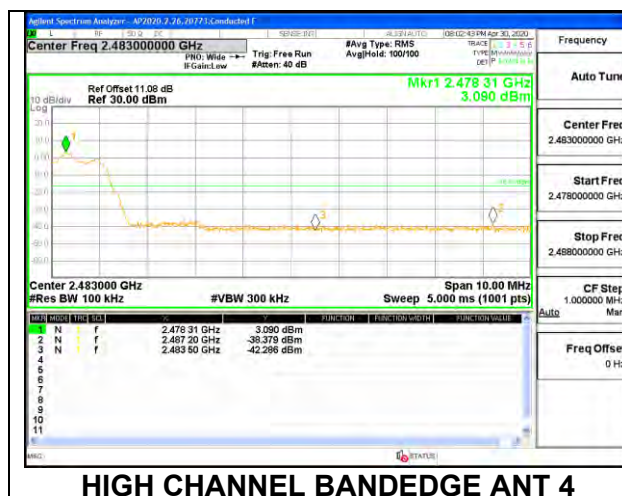


HIGH CHANNEL BANDEDGE ANT 4

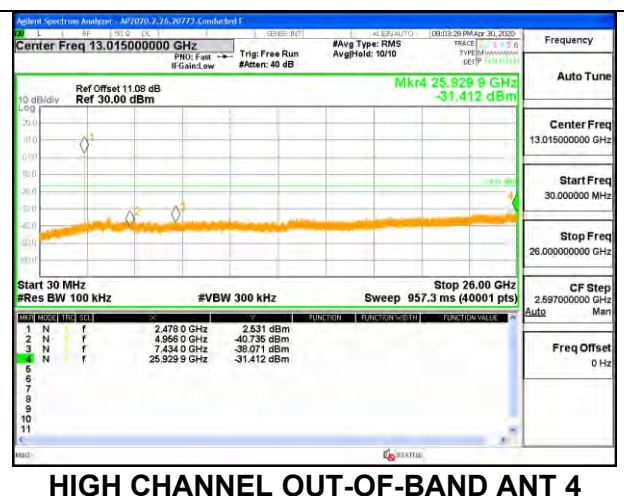

HIGH CHANNEL OUT-OF-BAND ANT 4

ANT 3

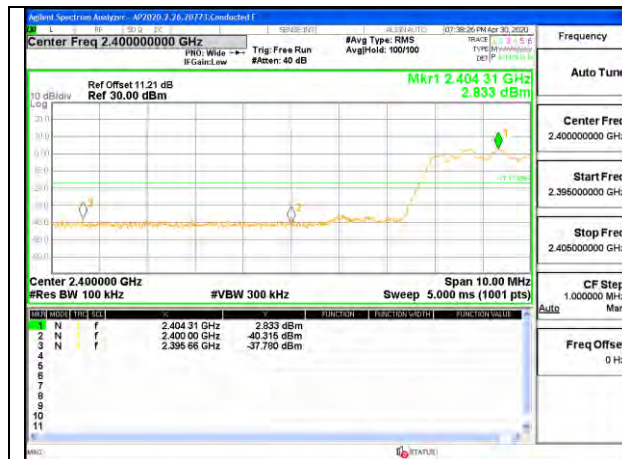

LOW CHANNEL BANDEDGE ANT 3



LOW CHANNEL OUT-OF-BAND ANT 3



MID CHANNEL REFERENCE ANT 3



MID CHANNEL OUT-OF-BAND ANT 3




HIGH CHANNEL BANDEDGE ANT 3




HIGH CHANNEL OUT-OF-BAND ANT 3

9.7.7. LOW POWER HDR (HDR8) ANT 4

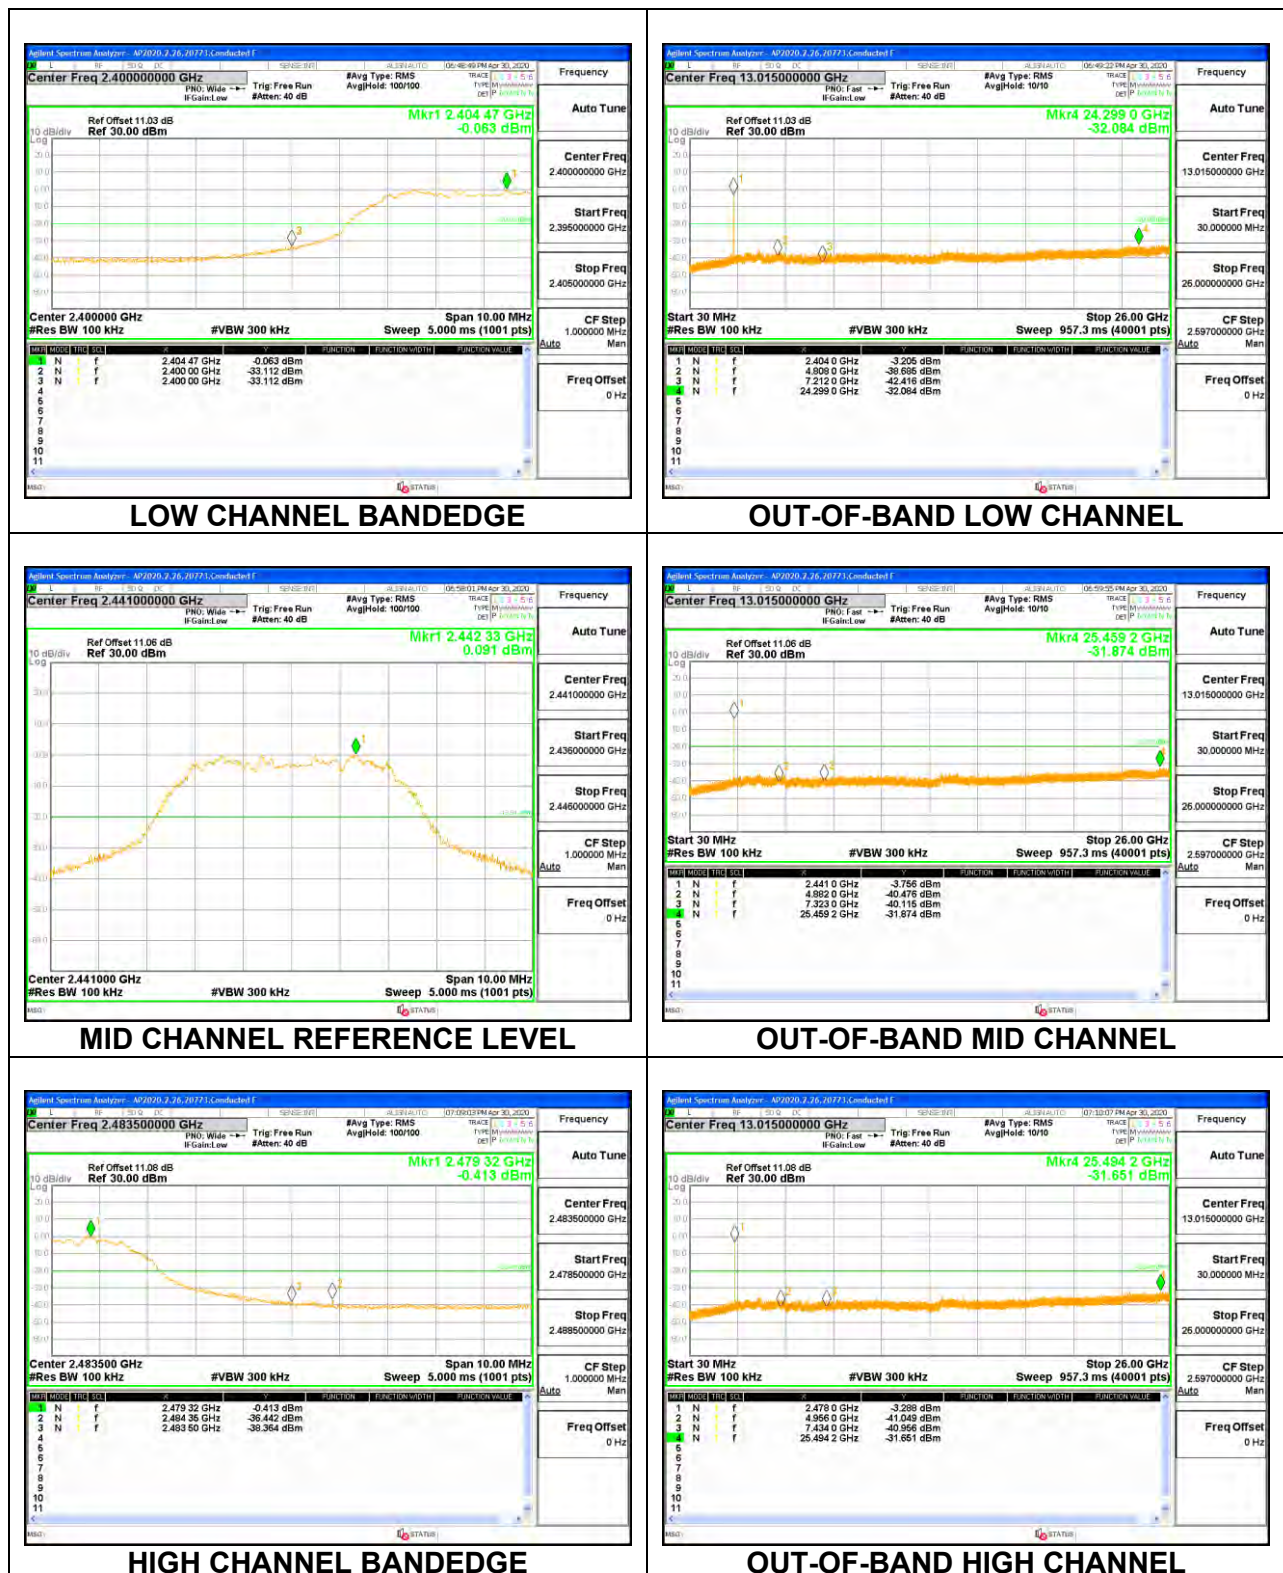


ANT 3

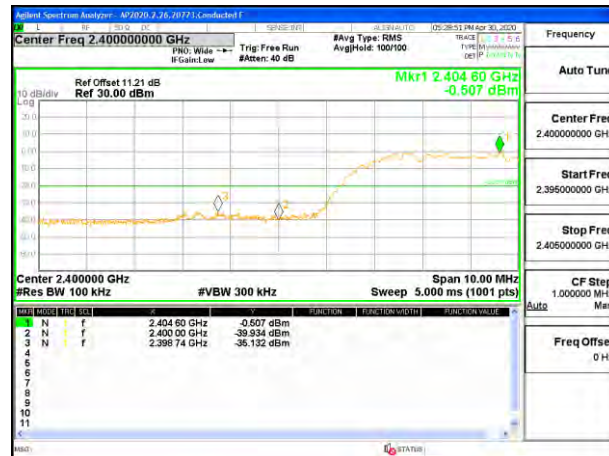

LOW CHANNEL BANDEDGE



OUT-OF-BAND LOW CHANNEL

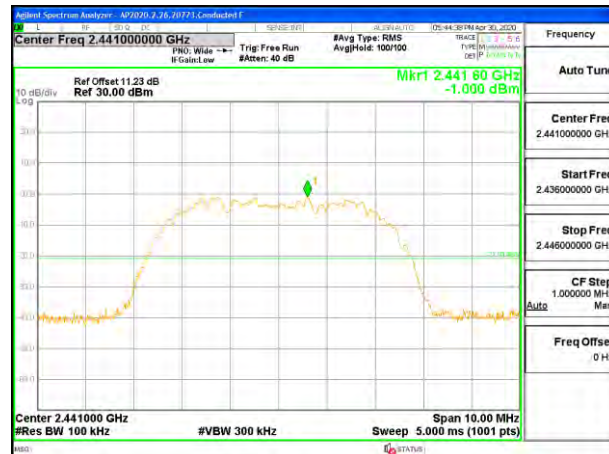

MID CHANNEL REFERENCE LEVEL



OUT-OF-BAND MID CHANNEL









HIGH CHANNEL BANDEDGE



OUT-OF-BAND HIGH CHANNEL

9.7.8. LOW POWER HDR TXBF (HDR8)

ANT 4

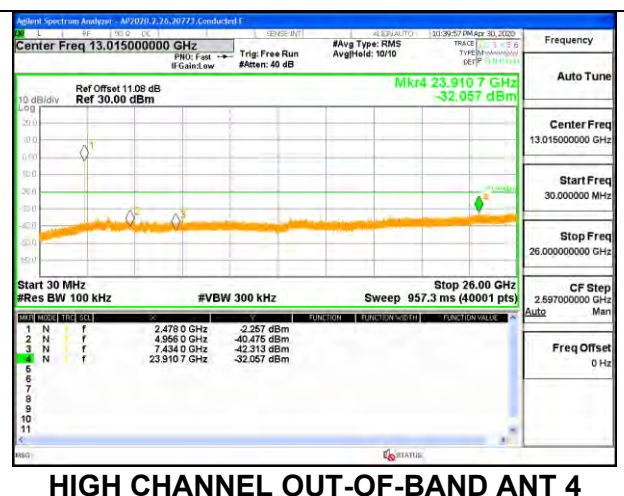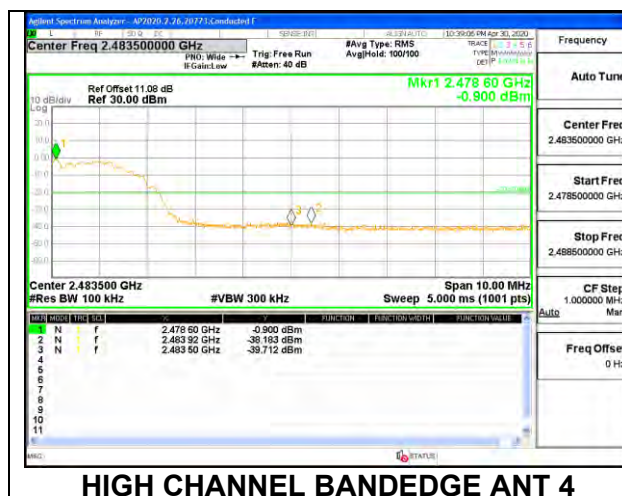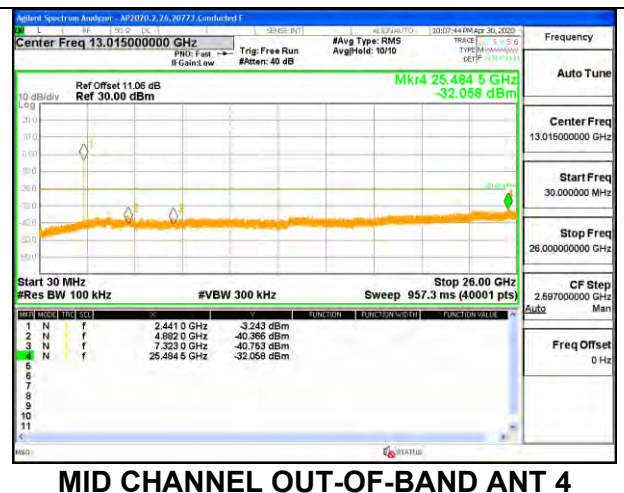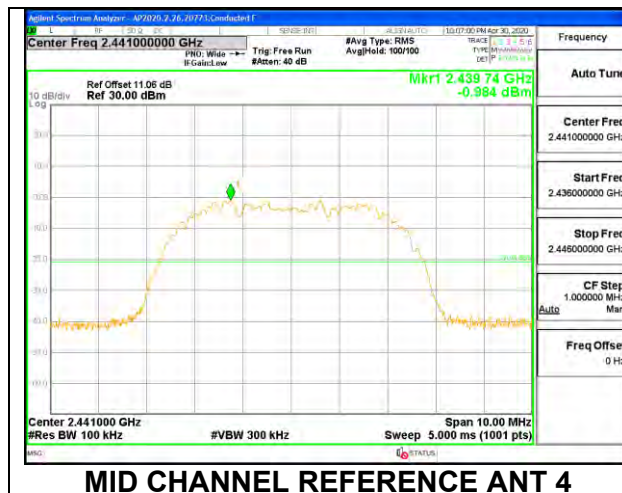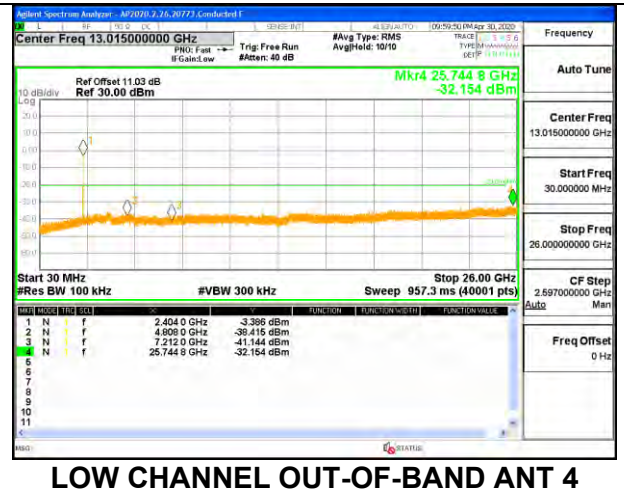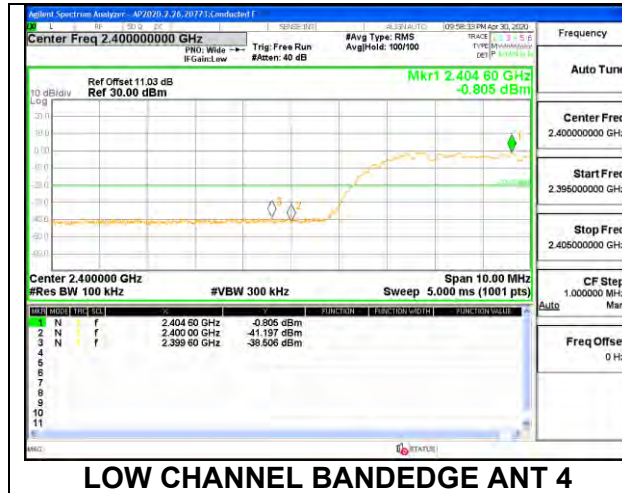

ANT 3



LOW CHANNEL BANDEDGE ANT 3




LOW CHANNEL OUT-OF-BAND ANT 3



MID CHANNEL REFERENCE ANT 3



MID CHANNEL OUT-OF-BAND ANT 3

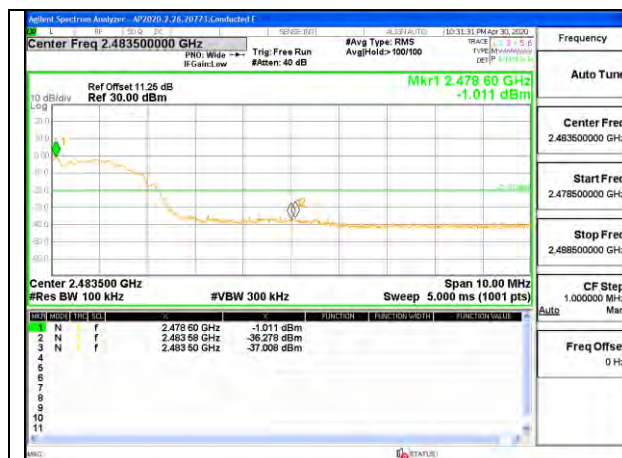

HIGH CHANNEL BANDEDGE ANT 3



HIGH CHANNEL OUT-OF-BAND ANT 3