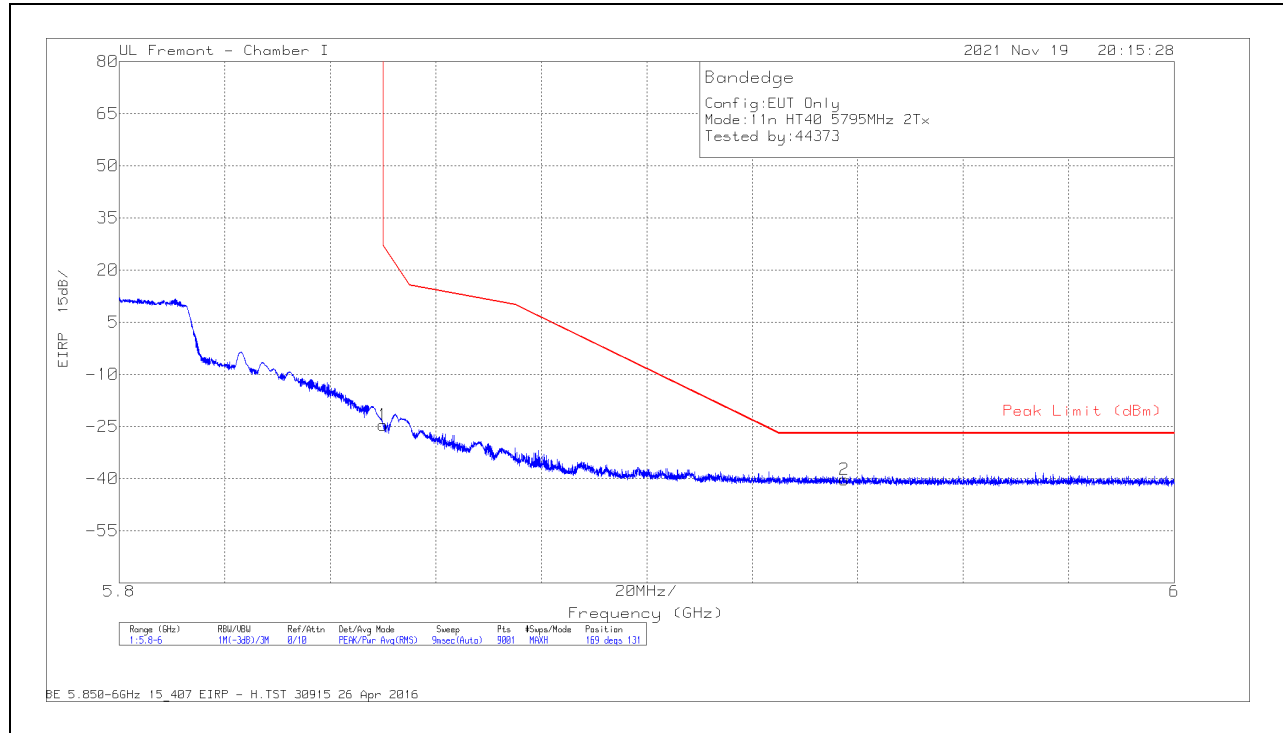


BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**

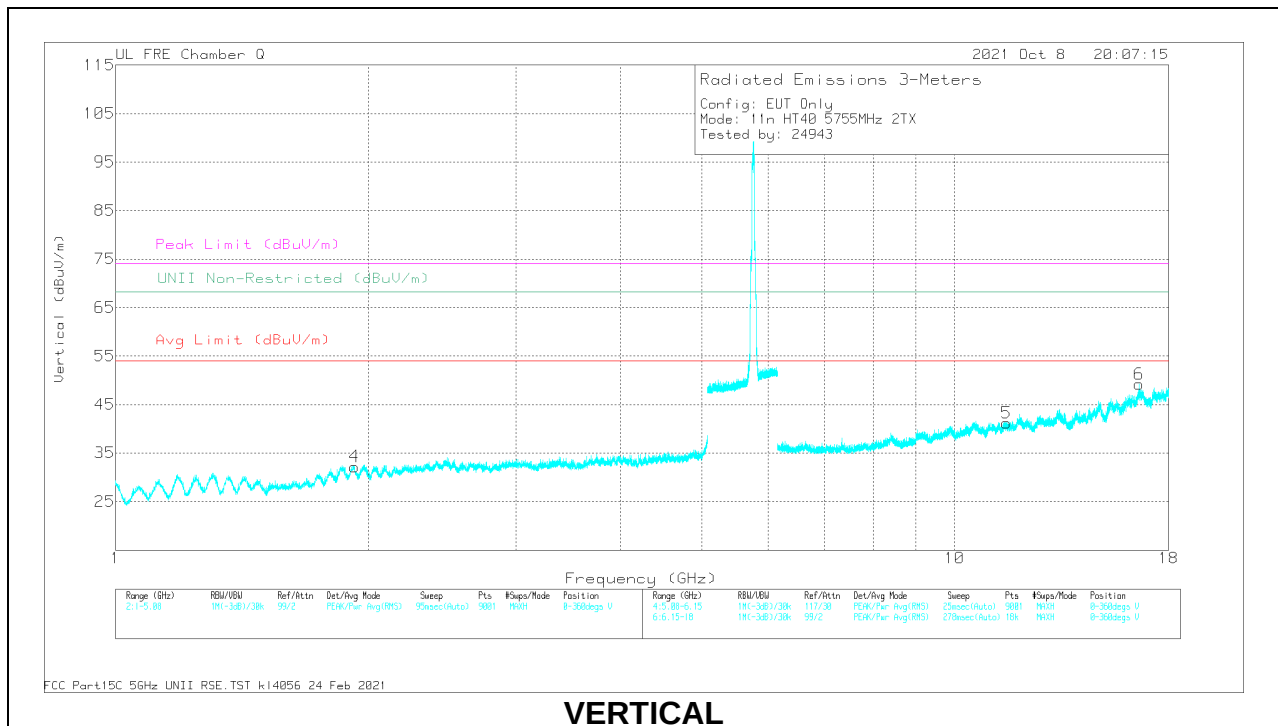
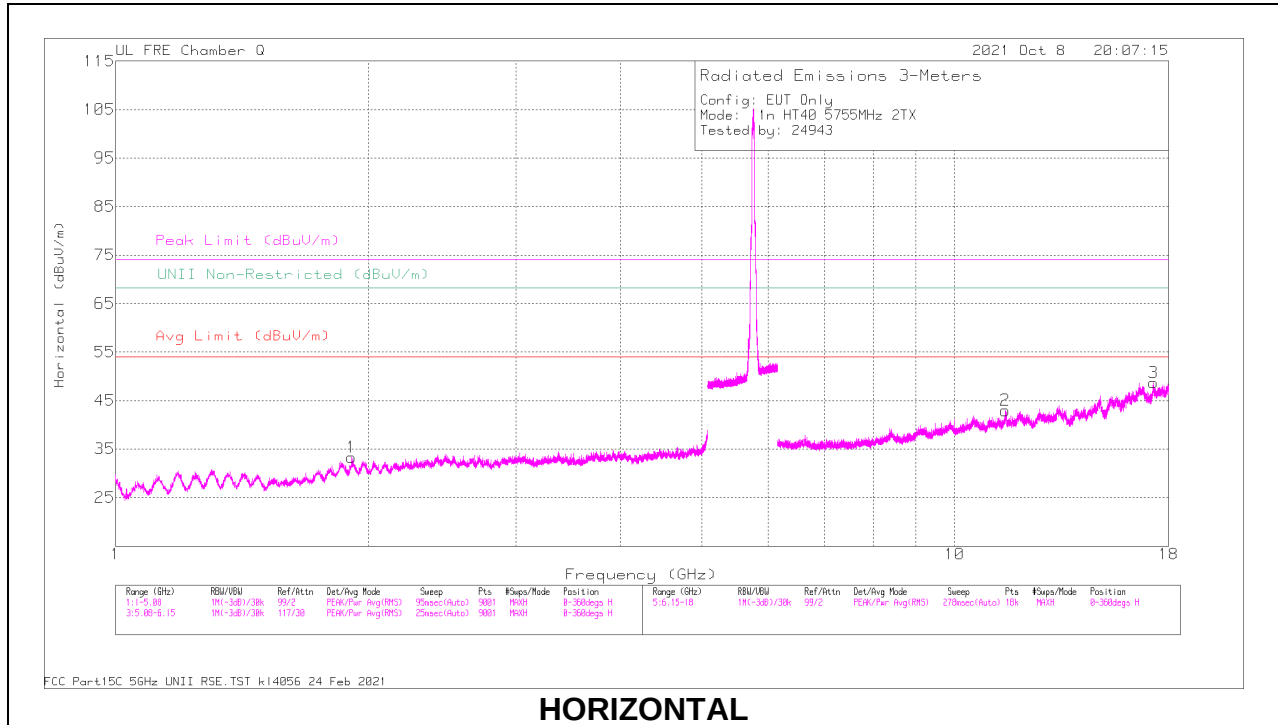
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-56.06	Pk	34.8	-15.1	11.8	0	-24.56	27	-51.56	169	131	H
2	5.9375	-72.06	Pk	35	-15	11.8	0	-40.26	-27	-13.26	169	131	H

Pk - Peak detector

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Ampl/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-59.45	Pk	34.8	-15.1	11.8	0	-27.95	27	-54.95	9	115	V
2	5.9468	-71.77	Pk	35.1	-15	11.8	0	-39.87	-27	-12.87	9	115	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS**LOW CHANNEL RESULTS**

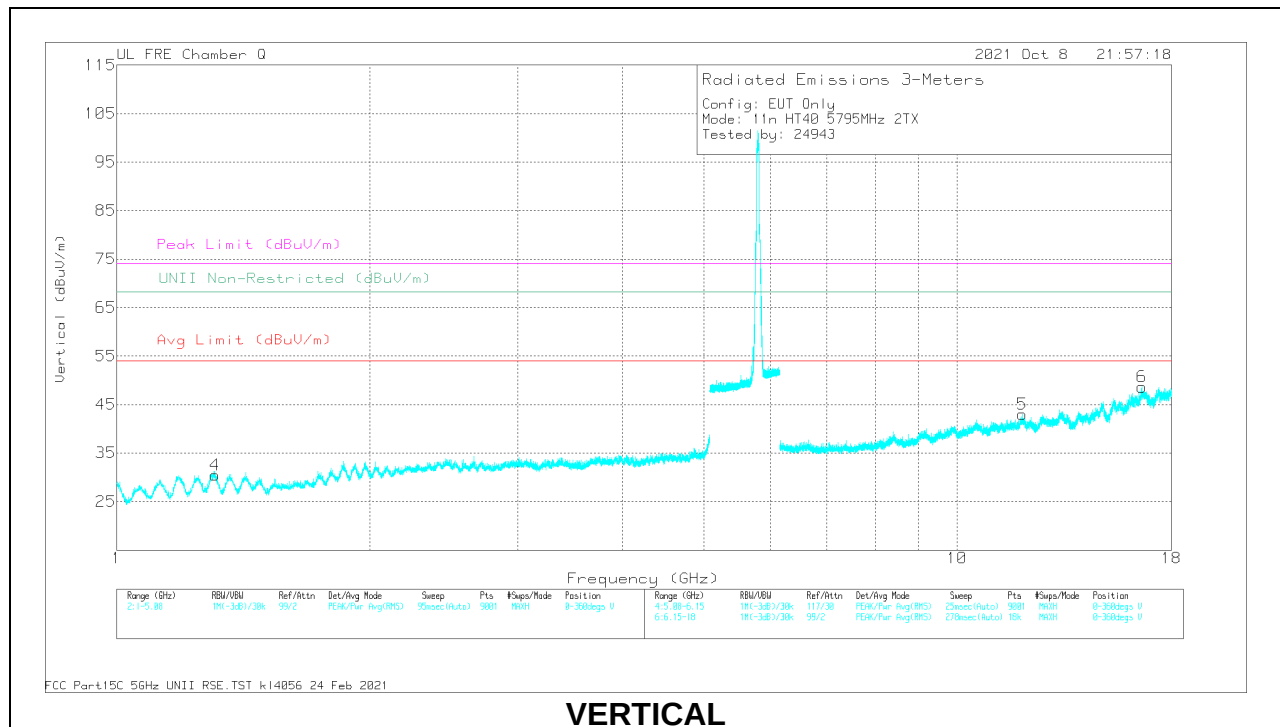
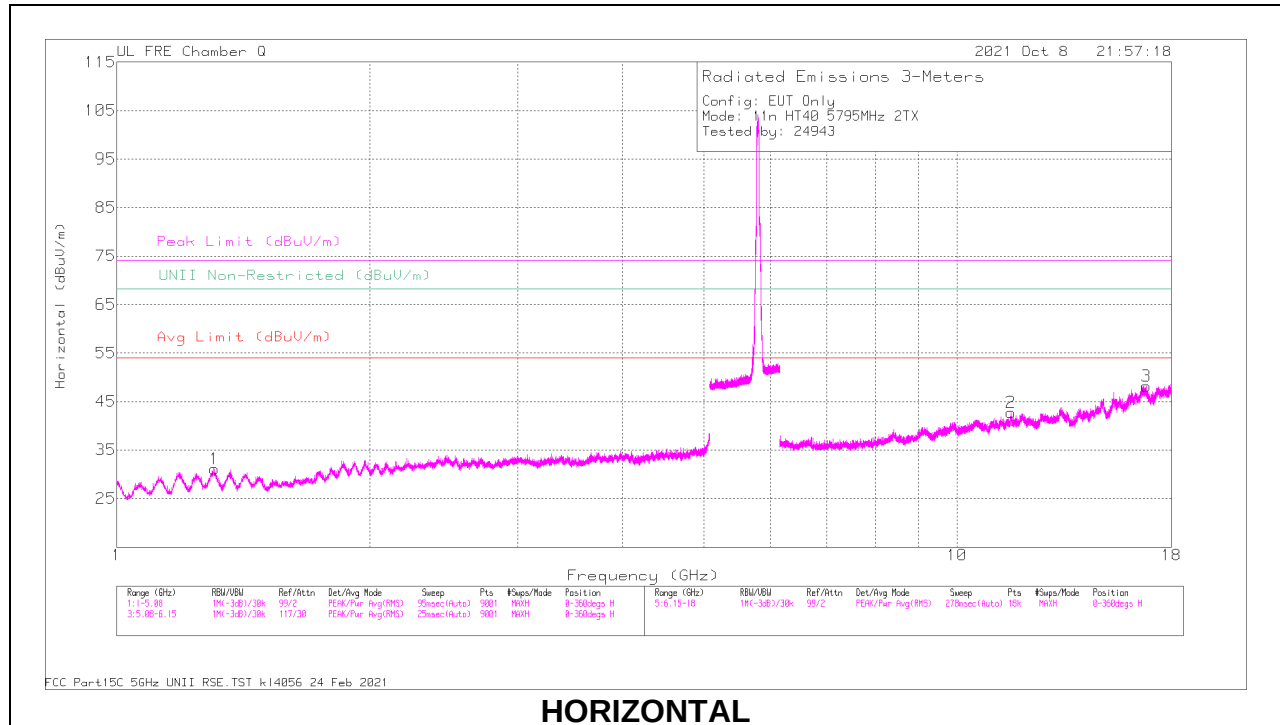
RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF PRE0213831 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.91134	56.34	PK-U	30.6	-44.6	42.34	-	-	-	-	68.2	-25.86	180	100	H
4	1.92591	55.95	PK-U	30.7	-44.6	42.05	-	-	-	-	68.2	-26.15	180	201	V
2	*11.50404	48.42	PK-U	38.1	-34.1	52.42	-	-	74	-21.58	-	-	356	108	H
	*11.50581	36.92	ADR	38.1	-34.1	40.92	54	-13.08	-	-	-	-	356	108	H
5	*11.53788	34.41	ADR	38.1	-34	38.51	54	-15.49	-	-	-	-	111	149	V
	*11.53812	46.44	PK-U	38.1	-34	50.54	-	-	74	-23.46	-	-	111	149	V
6	16.59222	47.9	PK-U	41.6	-32.2	57.3	-	-	-	-	68.2	-10.9	180	180	V
3	17.2687	48.39	PK-U	41.2	-31.9	57.69	-	-	-	-	68.2	-10.51	337	105	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

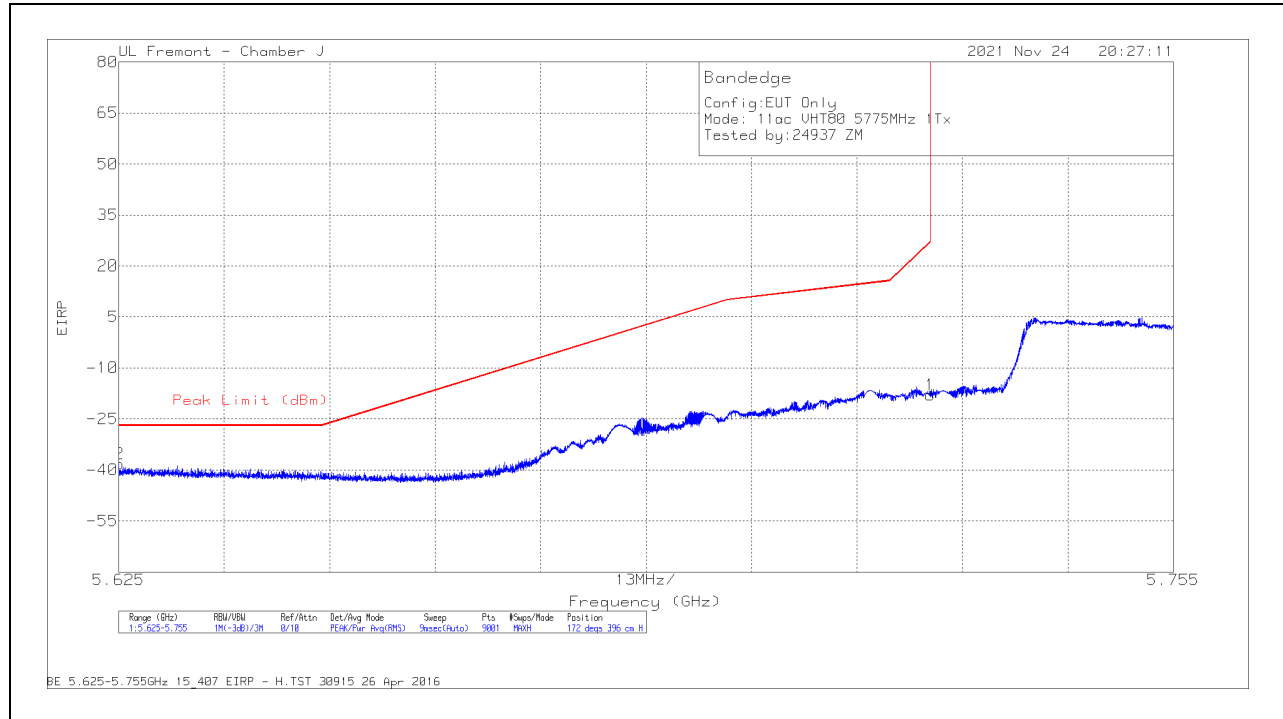
RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF PRE0213831 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.30538	57.72	PK-U	29.1	-45.3	41.52	-	-	74	-32.48	-	-	274	100	H
	* 1.30663	45.54	ADR	29.1	-45.3	29.34	54	-24.66	-	-	-	-	274	100	H
	* 1.30882	45.51	ADR	29.1	-45.3	29.31	54	-24.69	-	-	-	-	274	201	V
4	* 1.30991	57.13	PK-U	29.1	-45.2	41.03	-	-	74	-32.97	-	-	274	201	V
	* 11.60264	36.2	ADR	38.2	-34	40.4	54	-13.6	-	-	-	-	245	211	H
2	* 11.60405	48	PK-U	38.2	-33.9	52.3	-	-	74	-21.7	-	-	245	211	H
5	* 11.95819	48.1	PK-U	38.6	-35	51.7	-	-	74	-22.3	-	-	245	111	V
	* 11.95823	36.01	ADR	38.6	-35	39.61	54	-14.39	-	-	-	-	245	111	V
6	16.59622	47.58	PK-U	41.6	-32	57.18	-	-	-	-	68.2	-11.02	274	222	V
3	16.80217	47.92	PK-U	41.7	-33	56.62	-	-	-	-	68.2	-11.58	237	150	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

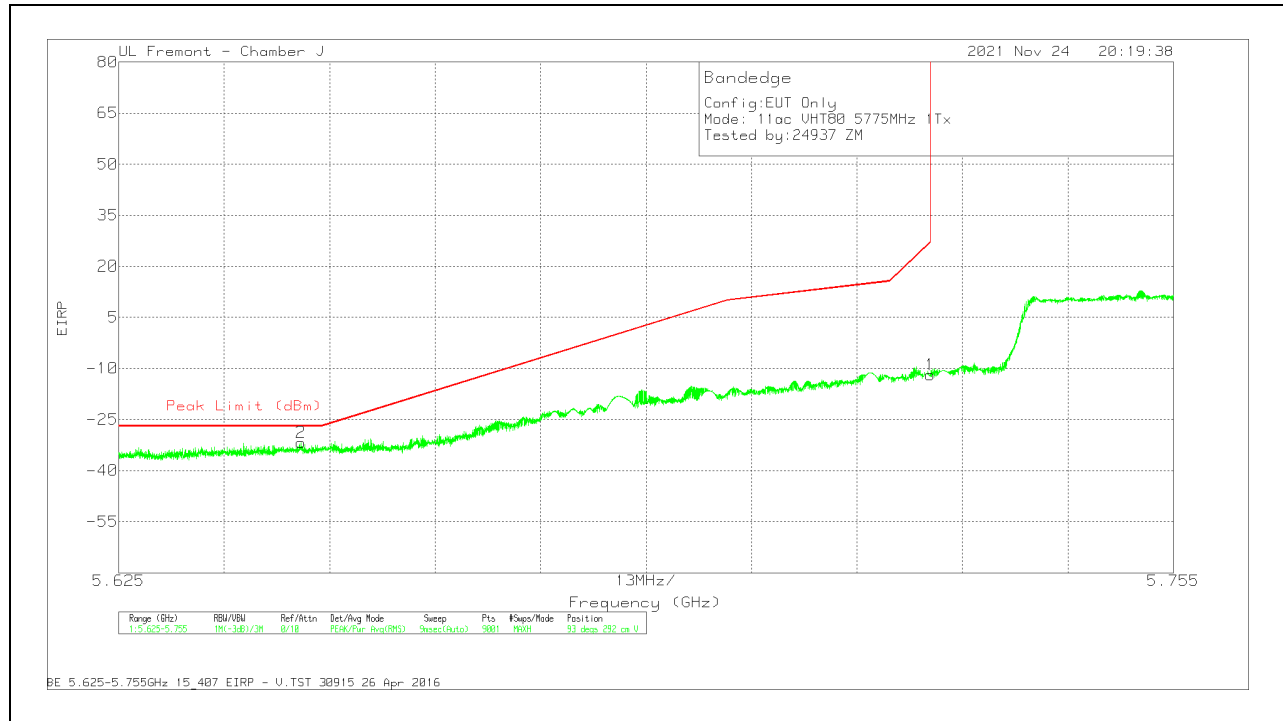
PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.21. TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.8 GHz BAND**1TX Antenna 6****BANDEDGE (CHANNEL 155 LOW EDGE)****HORIZONTAL RESULT**

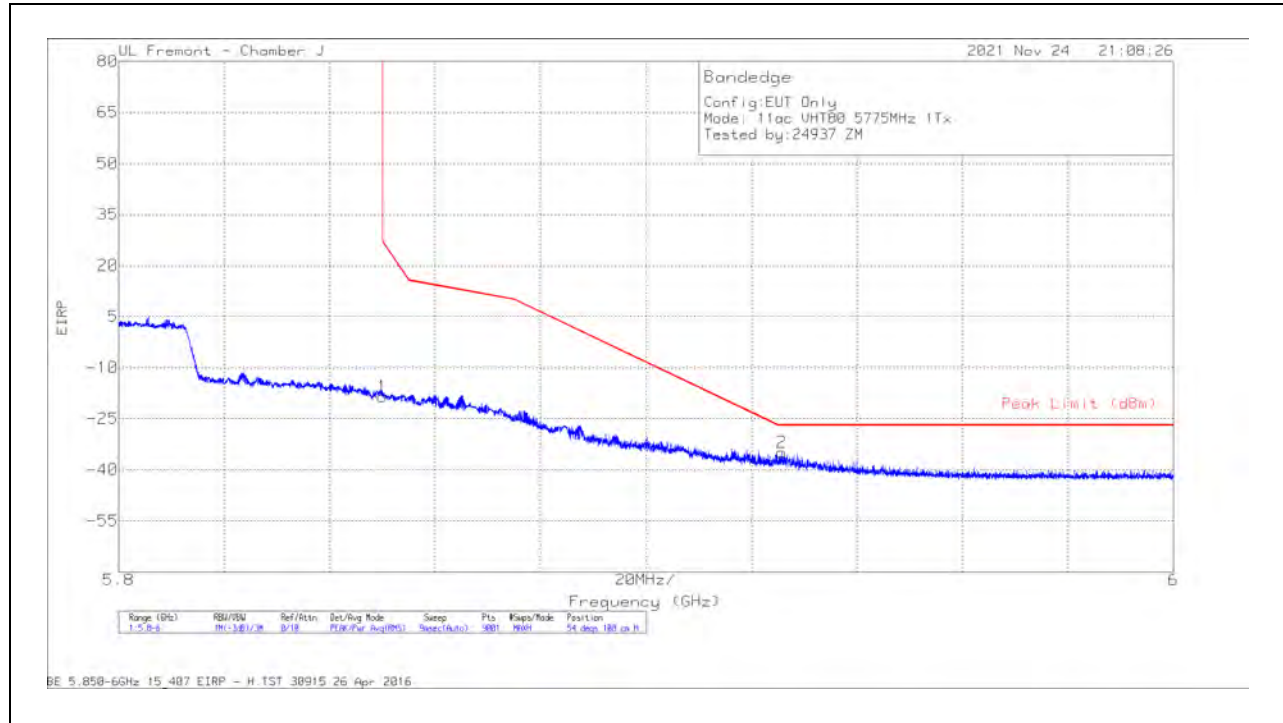
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-41.41	Pk	34.6	-22.9	11.8	-17.91	27	-44.91	172	396	H
2	5.62503	-61.57	Pk	34.6	-23	11.8	-38.17	-27	-11.17	172	396	H

Pk - Peak detector

VERTICAL RESULT

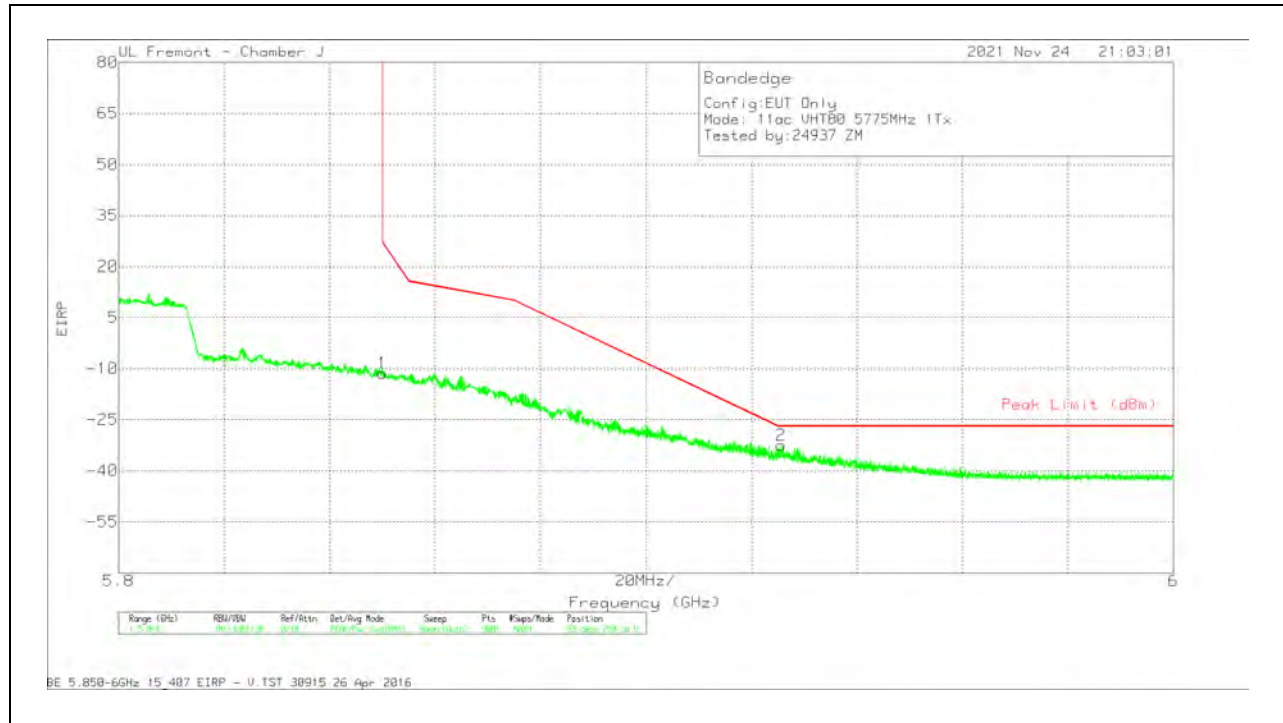
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-35.41	Pk	34.6	-22.9	11.8	-11.91	27	-38.91	93	292	V
2	5.64747	-55.01	Pk	34.5	-23	11.8	-31.71	-27	-4.71	93	292	V

Pk - Peak detector

BANDEDGE (CHANNEL 155 HIGH EDGE)**HORIZONTAL RESULT**

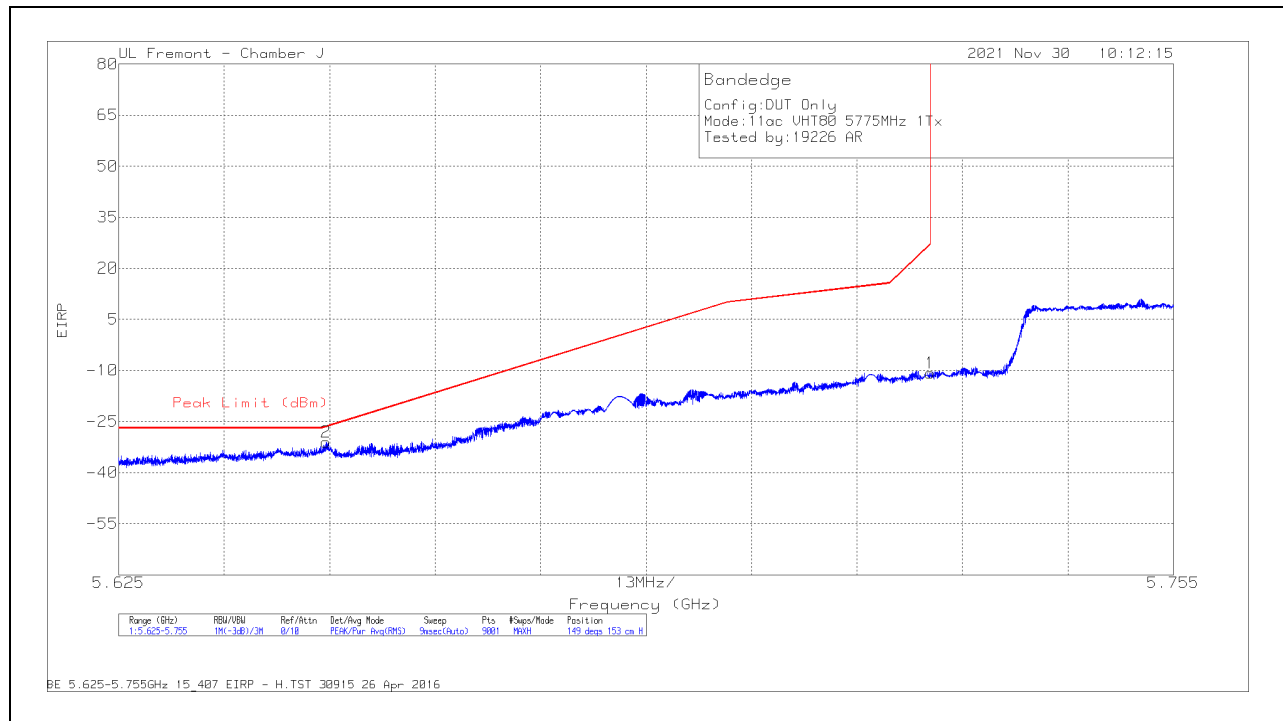
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-42.9	Pk	35.1	-22.5	11.8	-18.5	27	-45.5	54	108	H
2	5.92571	-59.57	Pk	35.1	-22.3	11.8	-34.97	-27	-7.97	54	108	H

Pk - Peak detector

VERTICAL RESULT

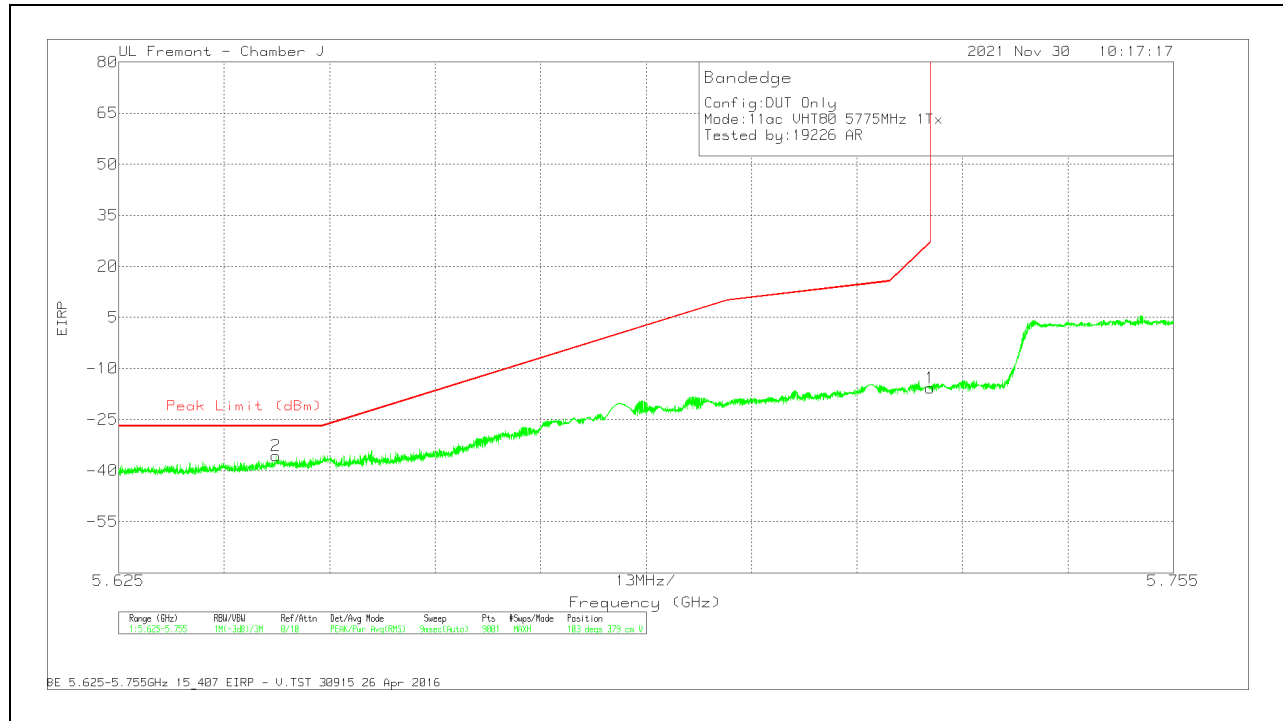
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-35.64	Pk	35.1	-22.5	11.8	-11.24	27	-38.24	93	258	V
2	5.92555	-57.04	Pk	35.1	-22.3	11.8	-32.44	-27	-5.44	93	258	V

Pk - Peak detector

1TX Antenna 3**BANDEDGE (CHANNEL 155 LOW EDGE)****HORIZONTAL RESULT**

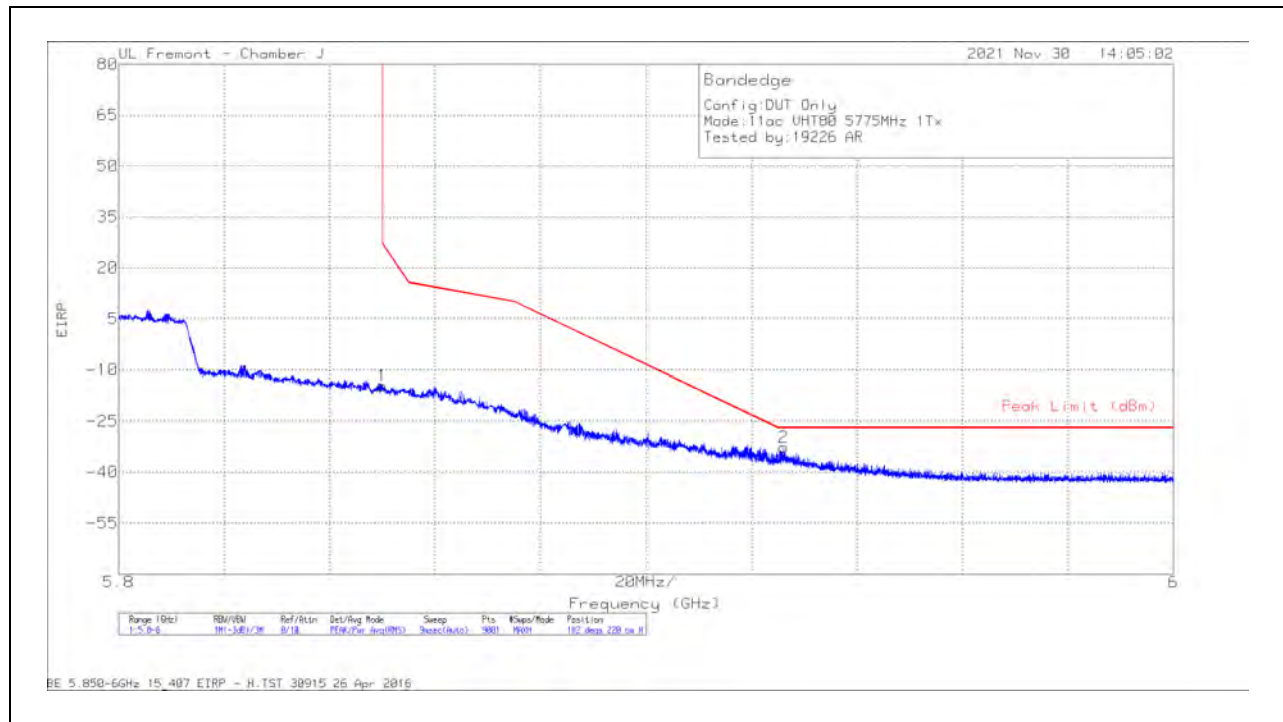
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-34.24	Pk	34.6	-22.9	11.8	-10.74	27	-37.74	149	153	H
2	5.65054	-54.4	Pk	34.5	-23	11.8	-31.1	-26.6	-4.5	149	153	H

Pk - Peak detector

VERTICAL RESULT

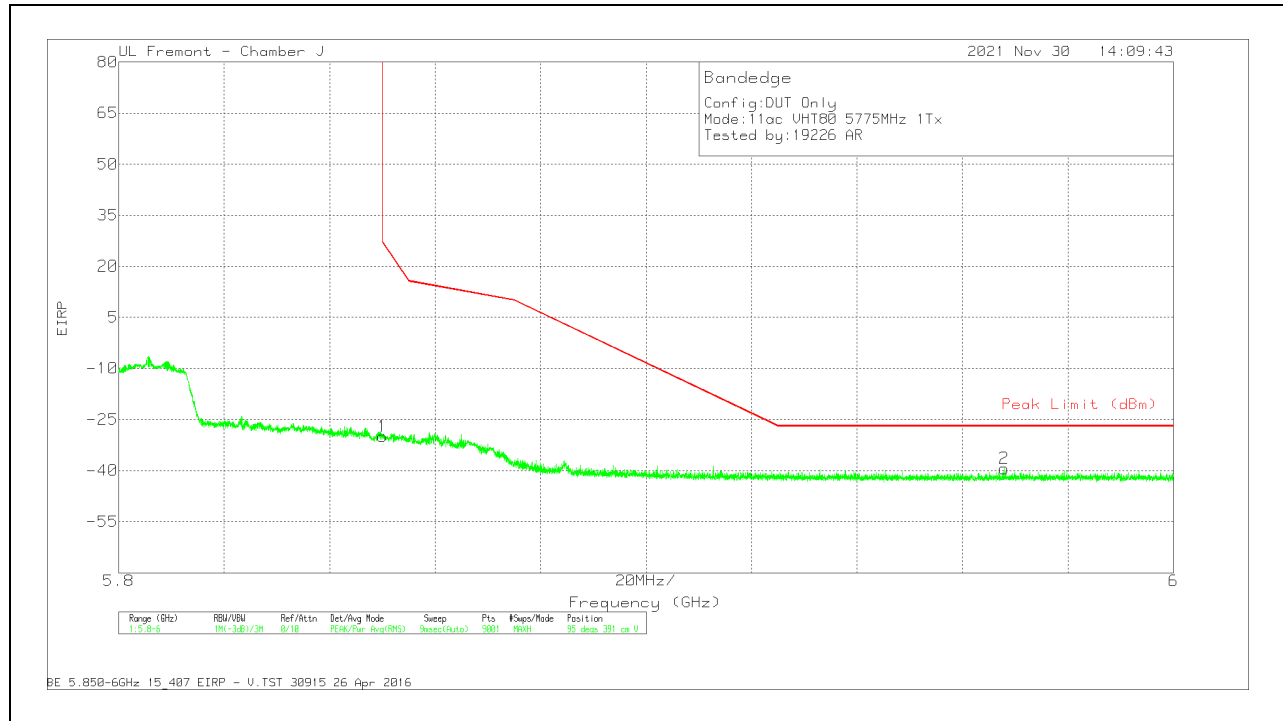
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-39.26	Pk	34.6	-22.9	11.8	-15.76	27	-42.76	103	379	V
2	5.64438	-59.01	Pk	34.5	-23	11.8	-35.71	-27	-8.71	103	379	V

Pk - Peak detector



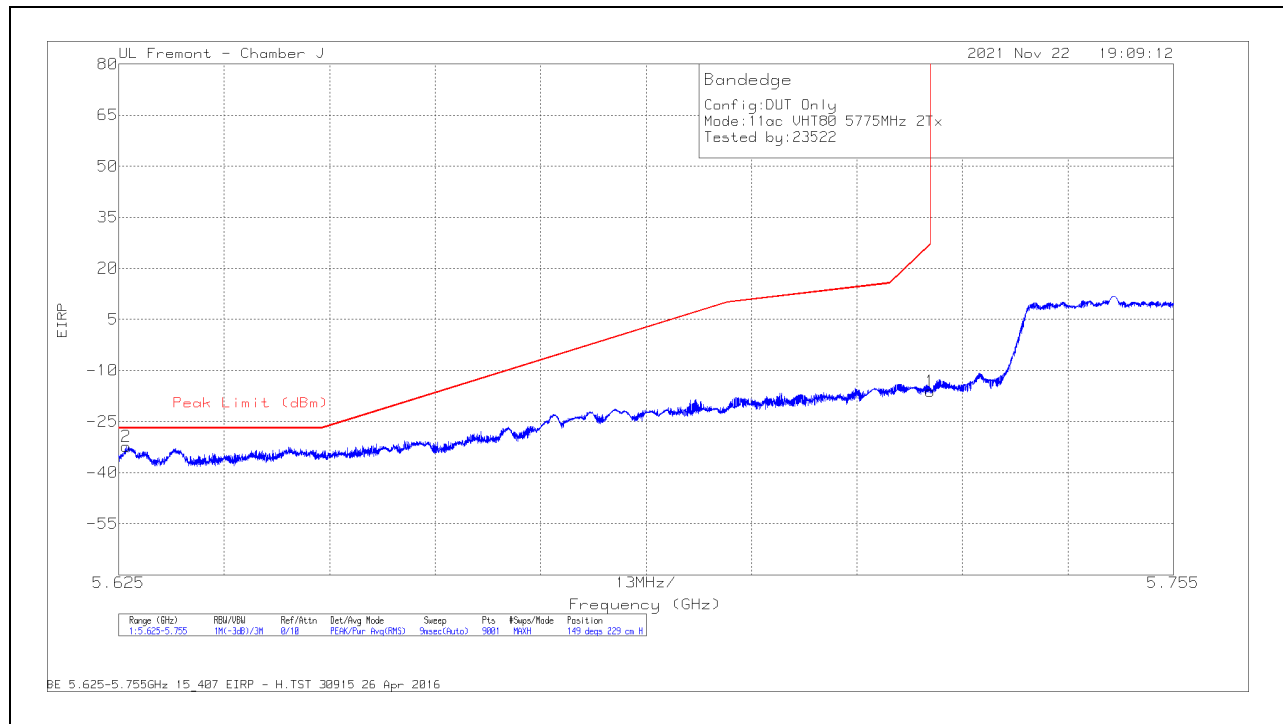
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-38.98	Pk	35.1	-22.5	11.8	-14.58	27	-41.58	182	220	H
2	5.92607	-57.21	Pk	35.1	-22.3	11.8	-32.61	-27	-5.61	182	220	H

Pk - Peak detector

VERTICAL RESULT

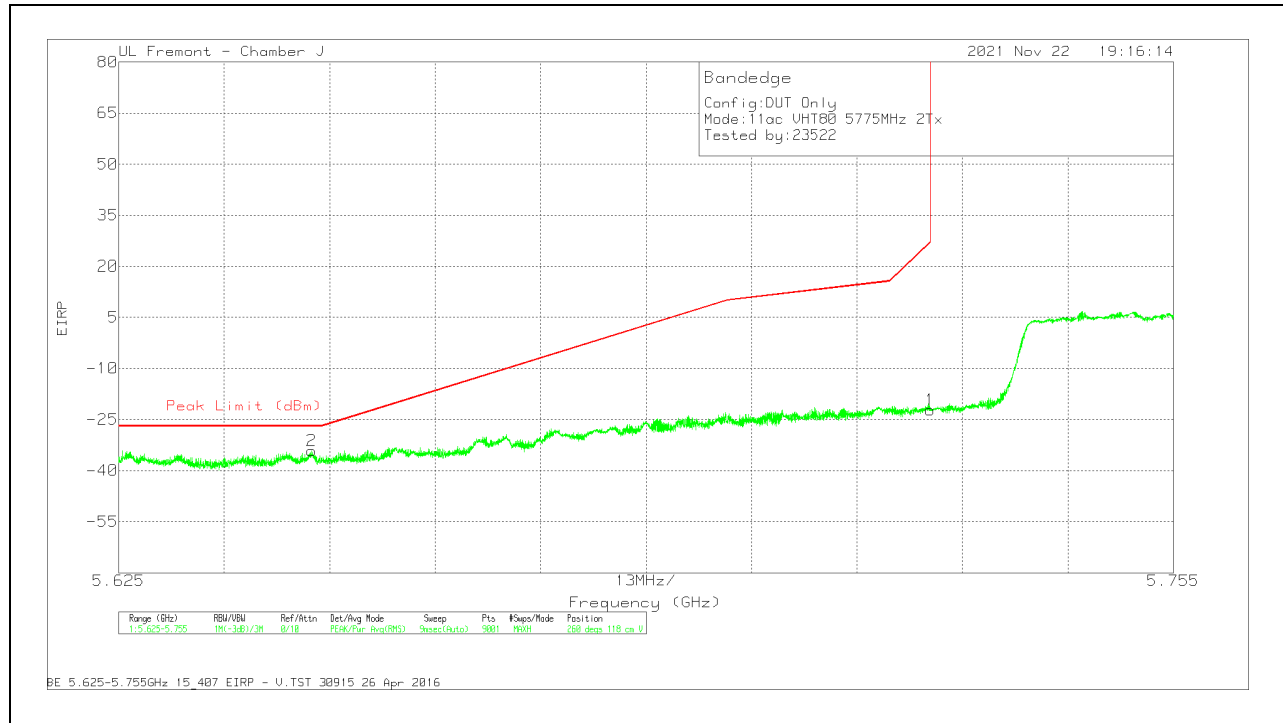
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-54.3	Pk	35.1	-22.5	11.8	-29.9	27	-56.9	95	391	V
2	5.96789	-64.01	Pk	35.1	-22.3	11.8	-39.41	-27	-12.41	95	391	V

Pk - Peak detector

2TX Antenna 6 + Antenna 3 CDD MODE**BANDEDGE (CHANNEL 155 LOW EDGE)****HORIZONTAL RESULT**

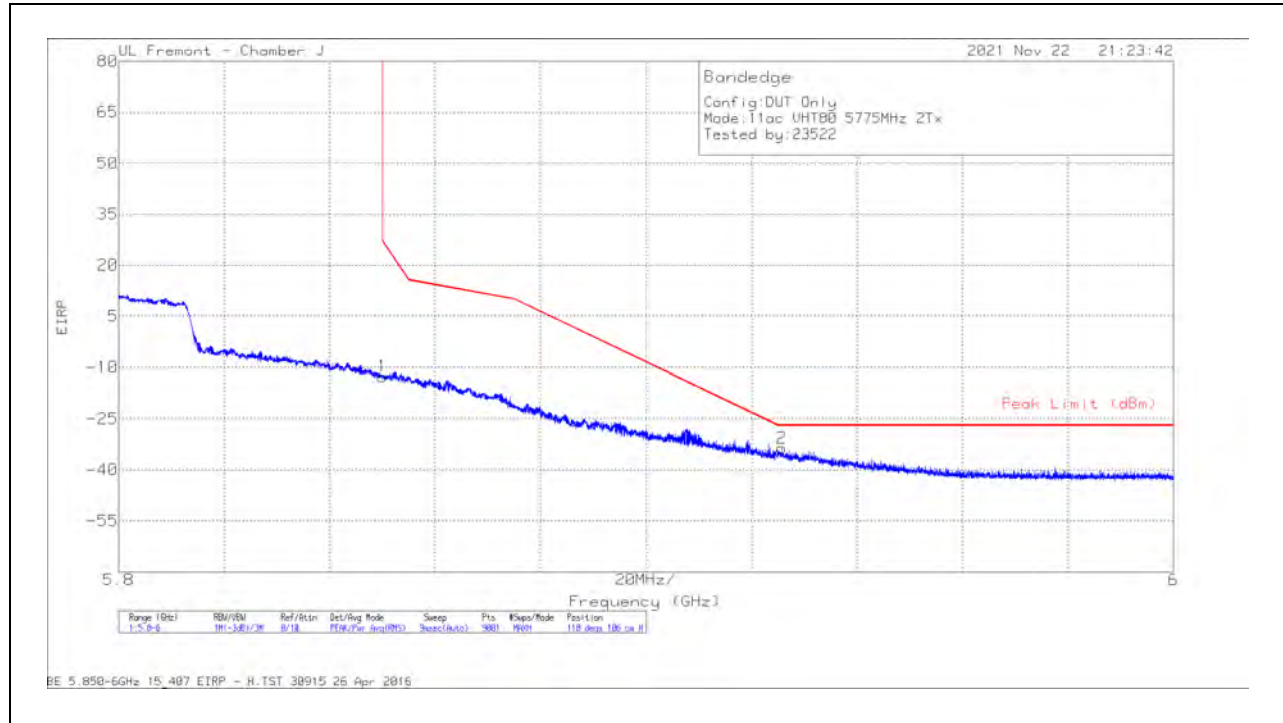
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-39.58	Pk	34.6	-22.9	11.8	-16.08	27	-43.08	149	229	H
2	5.6259	-55.7	Pk	34.6	-23	11.8	-32.3	-27	-5.3	149	229	H

Pk - Peak detector

VERTICAL RESULT

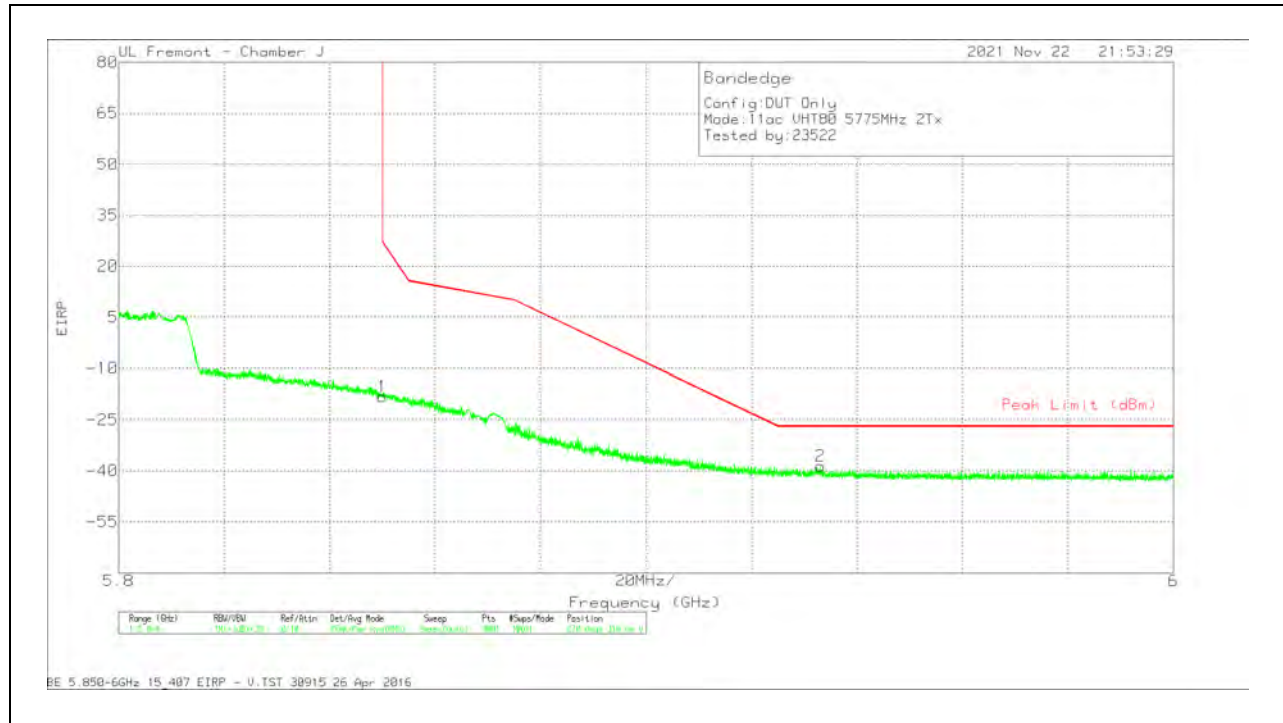
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-45.75	Pk	34.6	-22.9	11.8	-22.25	27	-49.25	260	118	V
2	5.64882	-57.45	Pk	34.5	-23	11.8	-34.15	-27	-7.15	260	118	V

Pk - Peak detector

BANDEDGE (CHANNEL 155 HIGH EDGE)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-36.97	Pk	35.1	-22.5	11.8	-12.57	27	-39.57	118	106	H
2	5.92569	-58.15	Pk	35.1	-22.3	11.8	-33.55	-27	-6.55	118	106	H

Pk - Peak detector

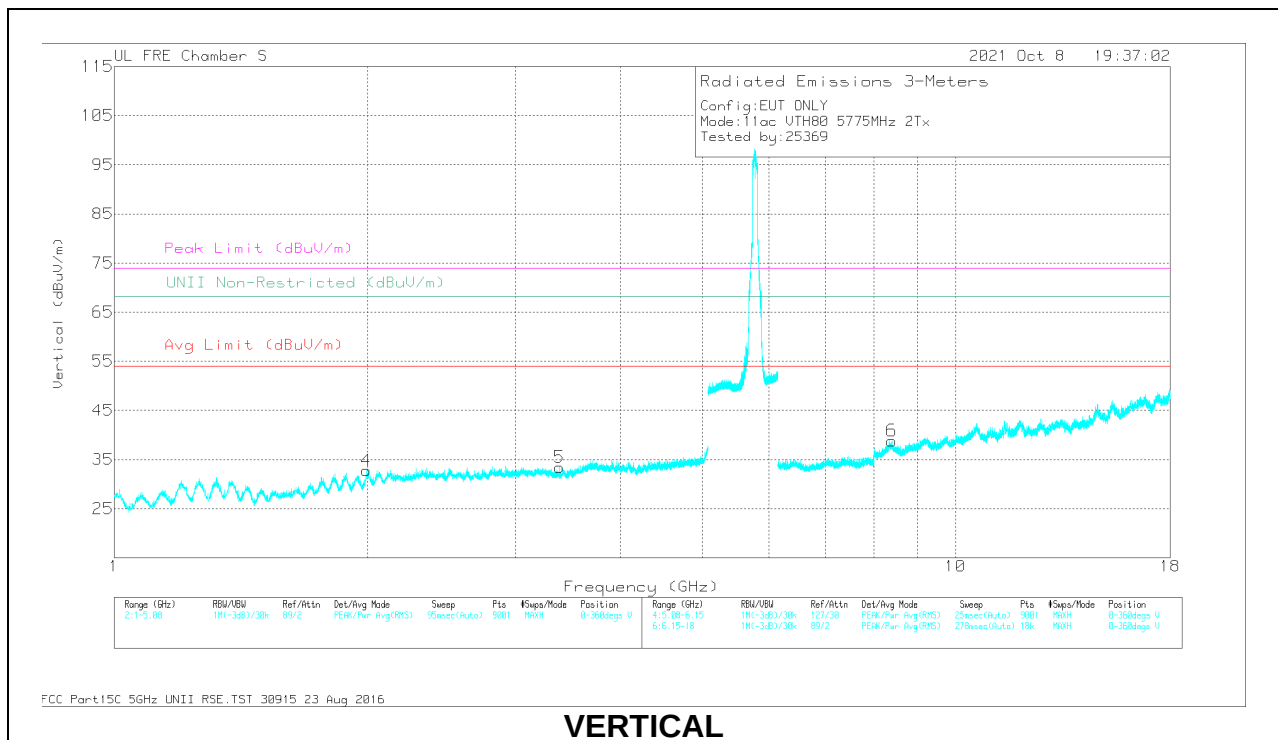
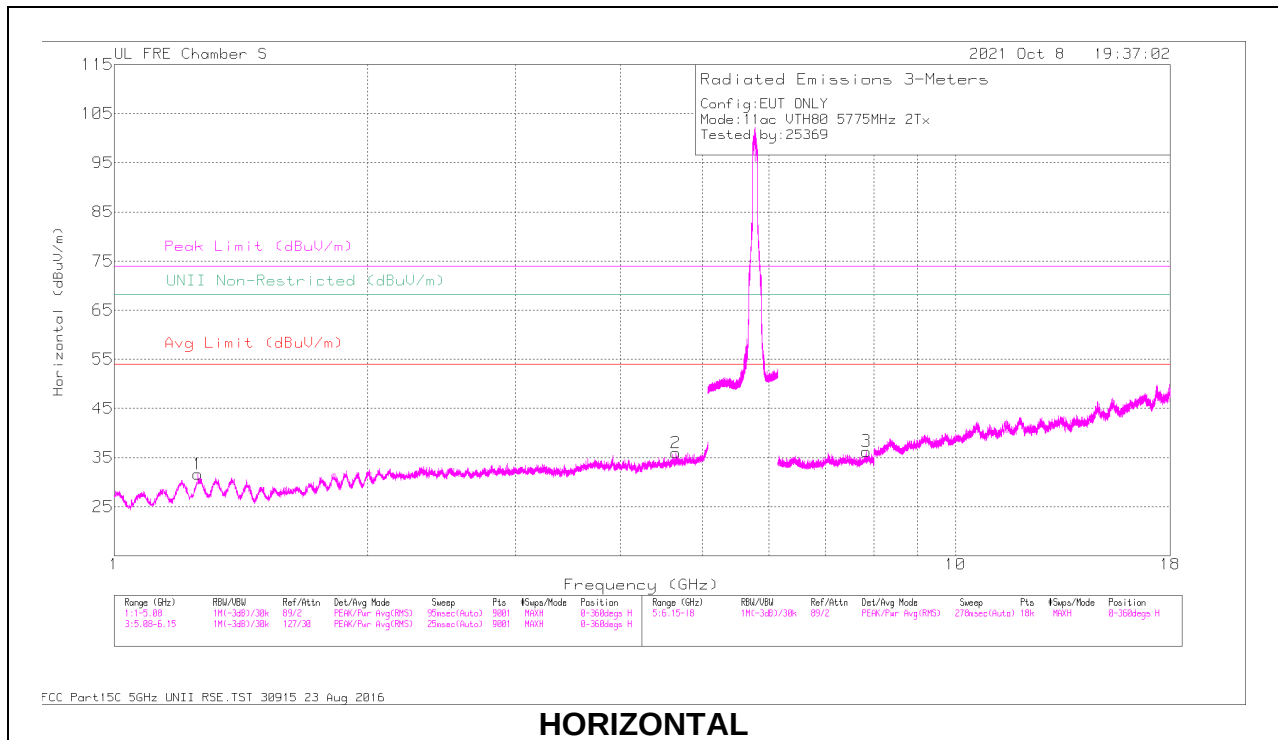
VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Ampl/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-42.46	Pk	35.1	-22.5	11.8	-18.06	27	-45.06	270	310	V
2	5.93307	-63.19	Pk	35.1	-22.3	11.8	-38.59	-27	-11.59	270	310	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS



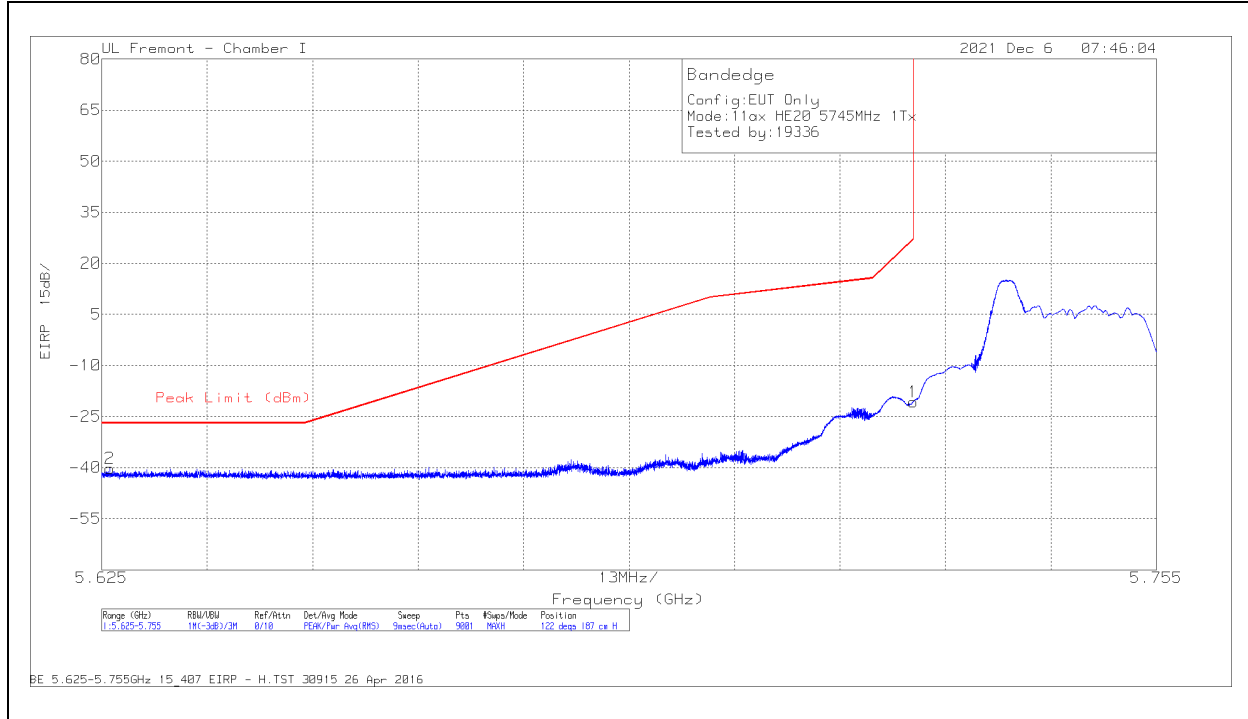
RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF PRE0213833 (dB/m)	Amp/Cbl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.25838	57.3	PK-U	28.8	-45.4	40.7	-	-	74	-33.3	-	-	360	100	H
	* 1.25888	45.71	ADR	28.8	-45.4	29.11	54	-24.89	-	-	-	-	360	100	H
2	* 4.65584	51.9	PK-U	34.3	-41.7	44.5	-	-	74	-29.5	-	-	360	100	H
	* 4.65279	40.52	ADR	34.3	-41.7	33.12	54	-20.88	-	-	-	-	360	100	H
6	* 8.40378	49	PK-U	36	-36.8	48.2	-	-	74	-25.8	-	-	360	201	V
	* 8.40023	37.44	ADR	36	-36.8	36.64	54	-17.36	-	-	-	-	360	201	V
4	1.99472	55.91	PK-U	31.1	-44.8	42.21	-	-	-	-	68.2	-25.99	360	201	V
5	3.38021	51.65	PK-U	32.4	-41.3	42.75	-	-	-	-	68.2	-25.45	360	200	V
3	7.83757	48.62	PK-U	36	-37.5	47.12	-	-	-	-	68.2	-21.08	360	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

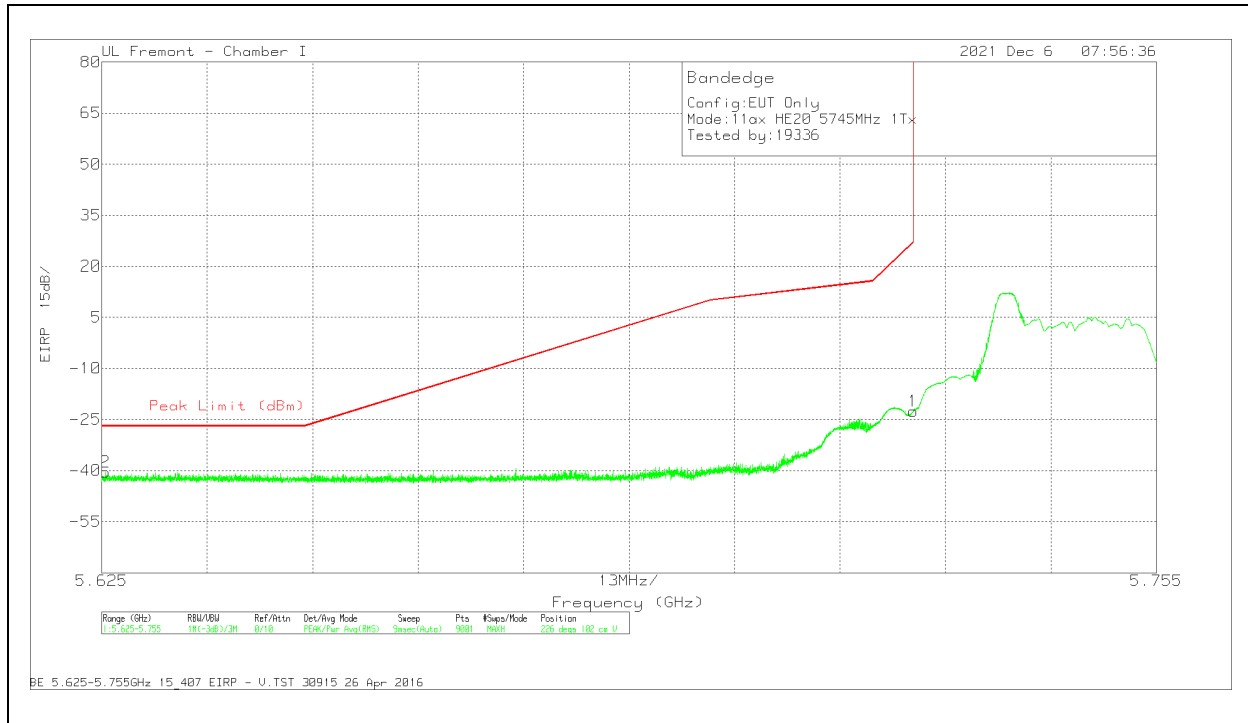
PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.22. TX ABOVE 1 GHz 802.11ax HE20 MODE IN THE 5.8GHz BAND**1TX Antenna 6 MODE: 26-Tones, RU Index 0****BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-51.02	Pk	34.5	-16	11.8	0	-20.72	27	-47.72	122	187	H
2	5.625982	-70.56	Pk	34.4	-15.9	11.8	0	-40.26	-27	-13.26	122	187	H

Pk - Peak detector

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-52.87	Pk	34.5	-16	11.8	0	-22.57	27	-49.57	226	102	V
2	5.625433	-70.78	Pk	34.4	-15.9	11.8	0	-40.48	-27	-13.48	226	102	V

Pk - Peak detector

1TX Antenna 6 MODE: 26-Tones, RU Index 8**BANDEDGE (HIGH CHANNEL)****HORIZONTAL RESULT**

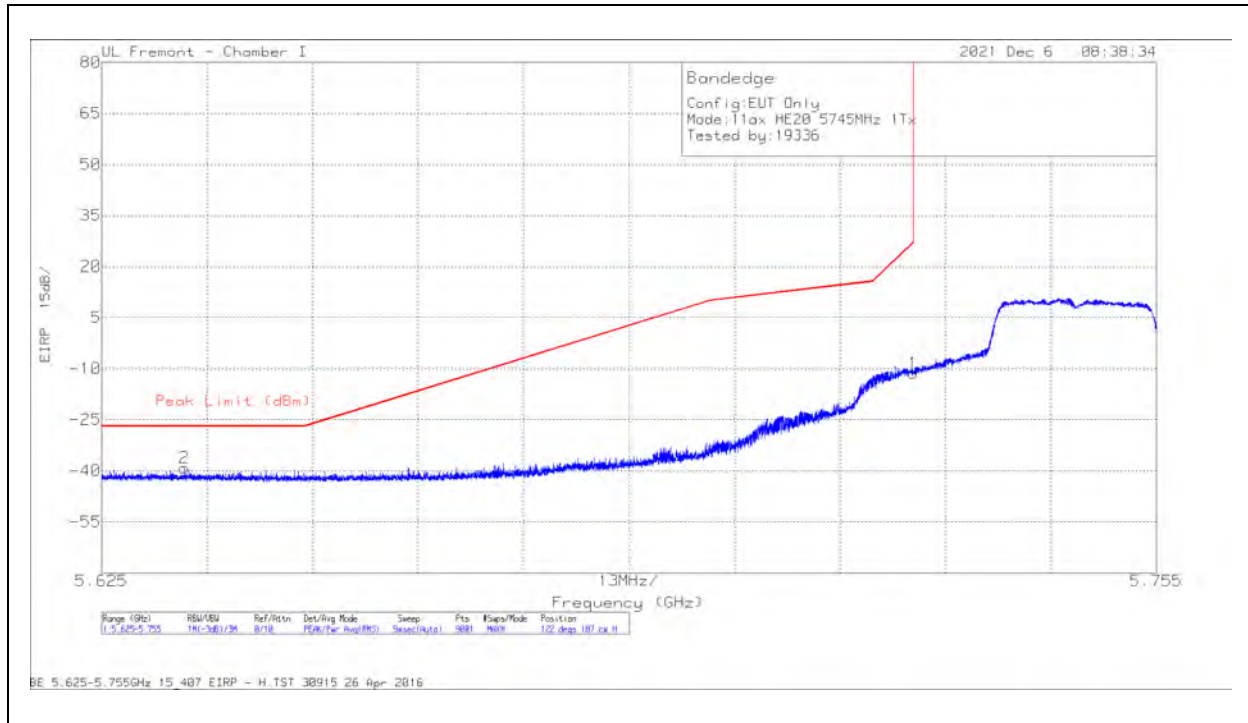
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-52.81	Pk	34.8	-15.1	11.8	0	-21.31	27	-48.31	205	265	H
2	5.956132	-70.54	Pk	35.1	-15.1	11.8	0	-38.74	-27	-11.74	205	265	H

Pk - Peak detector

VERTICAL RESULT

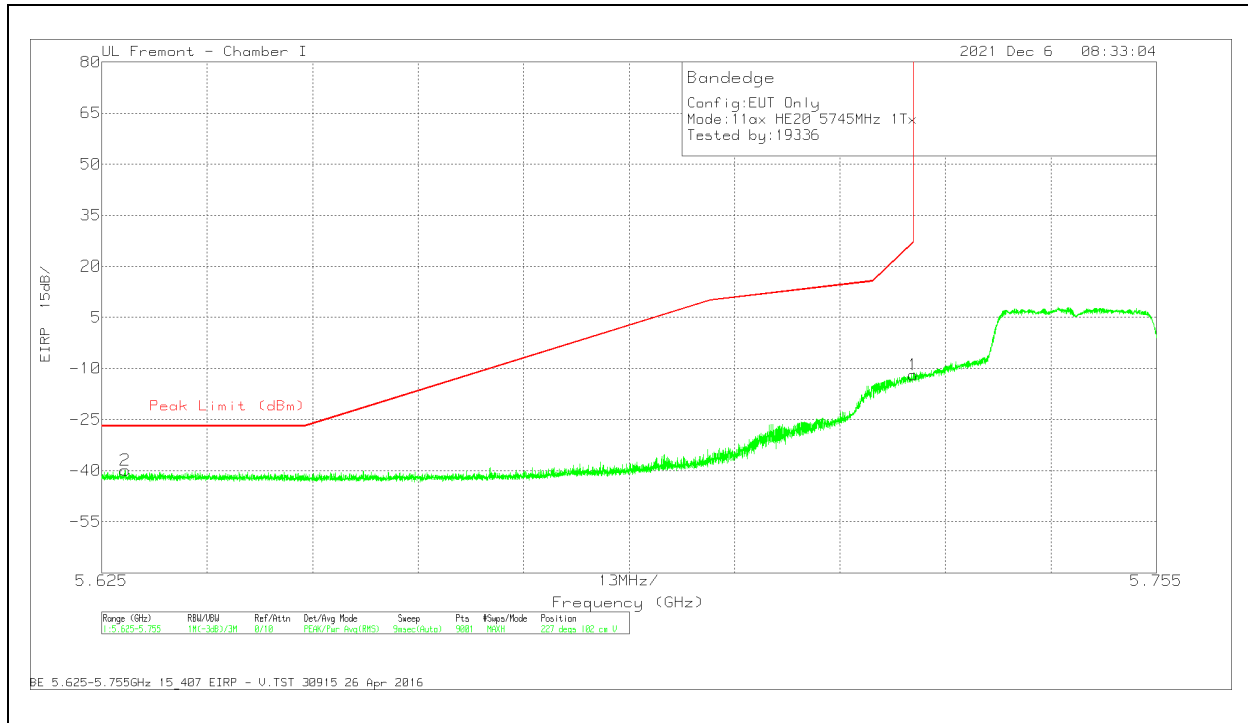
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-58.3	Pk	34.8	-15.1	11.8	0	-26.8	27	-53.8	238	264	V
2	5.990531	-70.56	Pk	35.1	-15.1	11.8	0	-38.76	-27	-11.76	238	264	V

Pk - Peak detector

1TX Antenna 6 MODE: 242-Tones, RU Index 61**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**

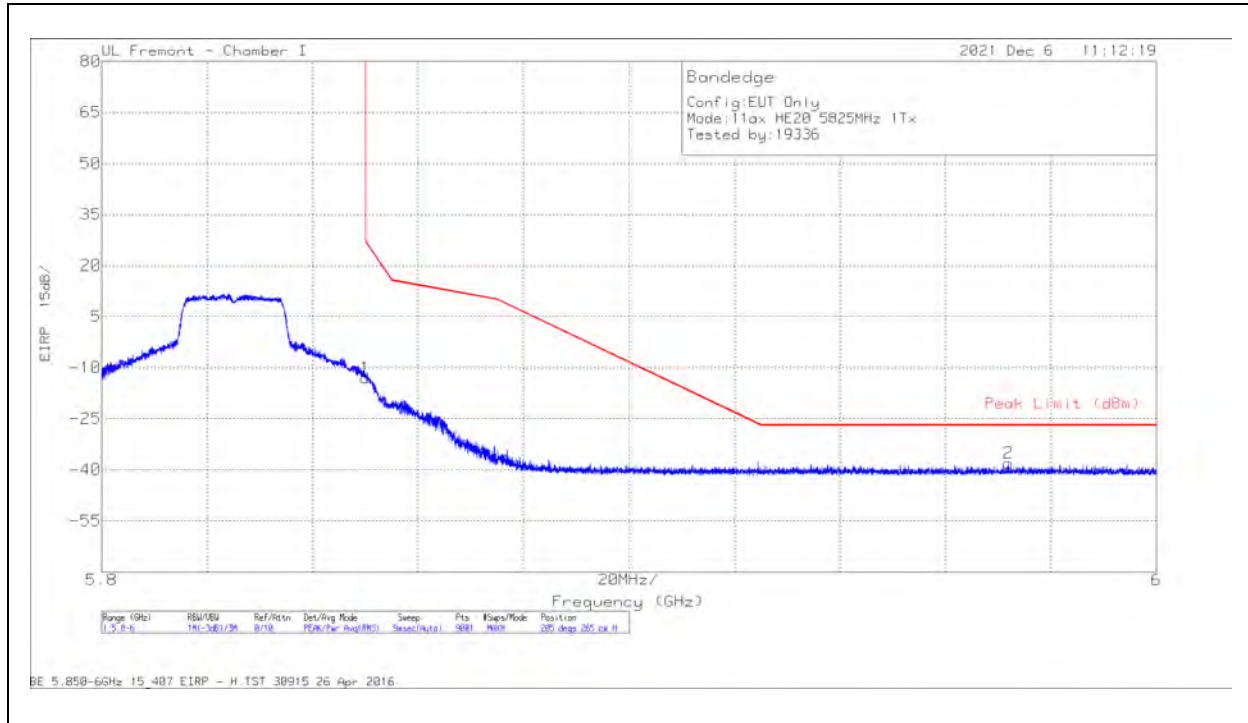
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-41.62	Pk	34.5	-16	11.8	0	-11.32	27	-38.32	122	187	H
2	5.635183	-69.38	Pk	34.4	-15.9	11.8	0	-39.08	-27	-12.08	122	187	H

Pk - Peak detector

VERTICAL RESULT

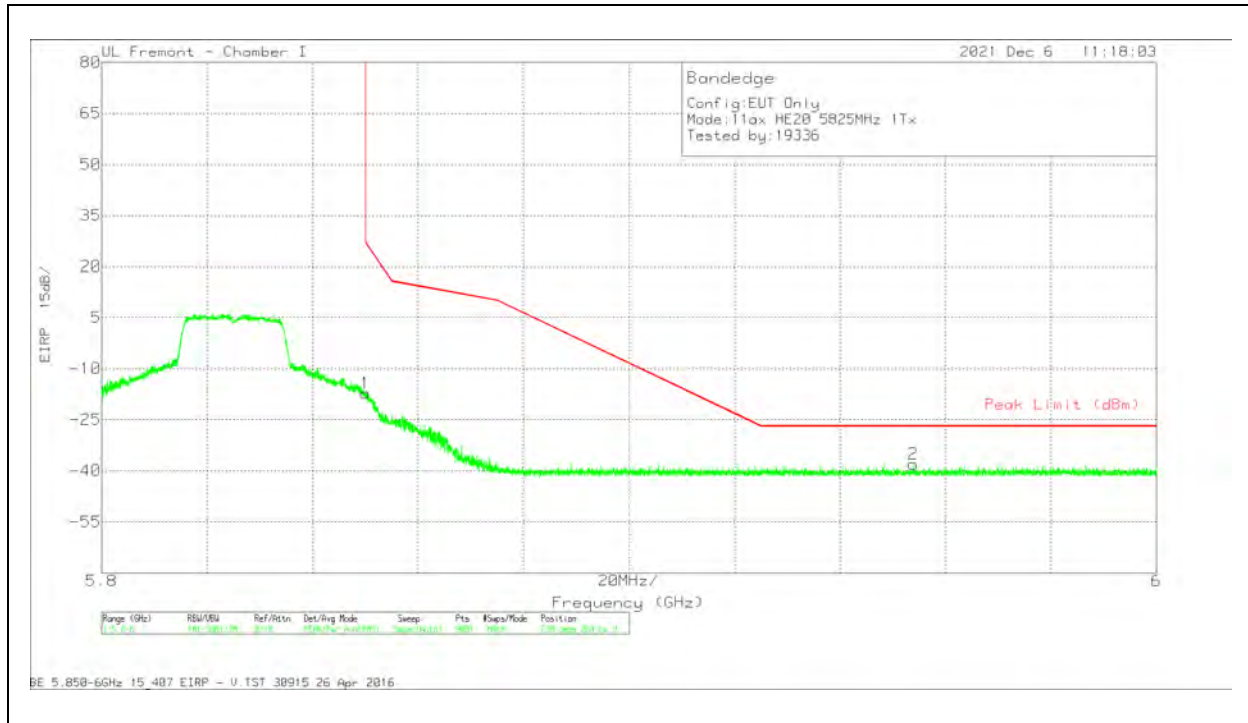
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-42.11	Pk	34.5	-16	11.8	0	-11.81	27	-38.81	227	102	V
2	5.627889	-70.23	Pk	34.4	-15.9	11.8	0	-39.93	-27	-12.93	227	102	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**

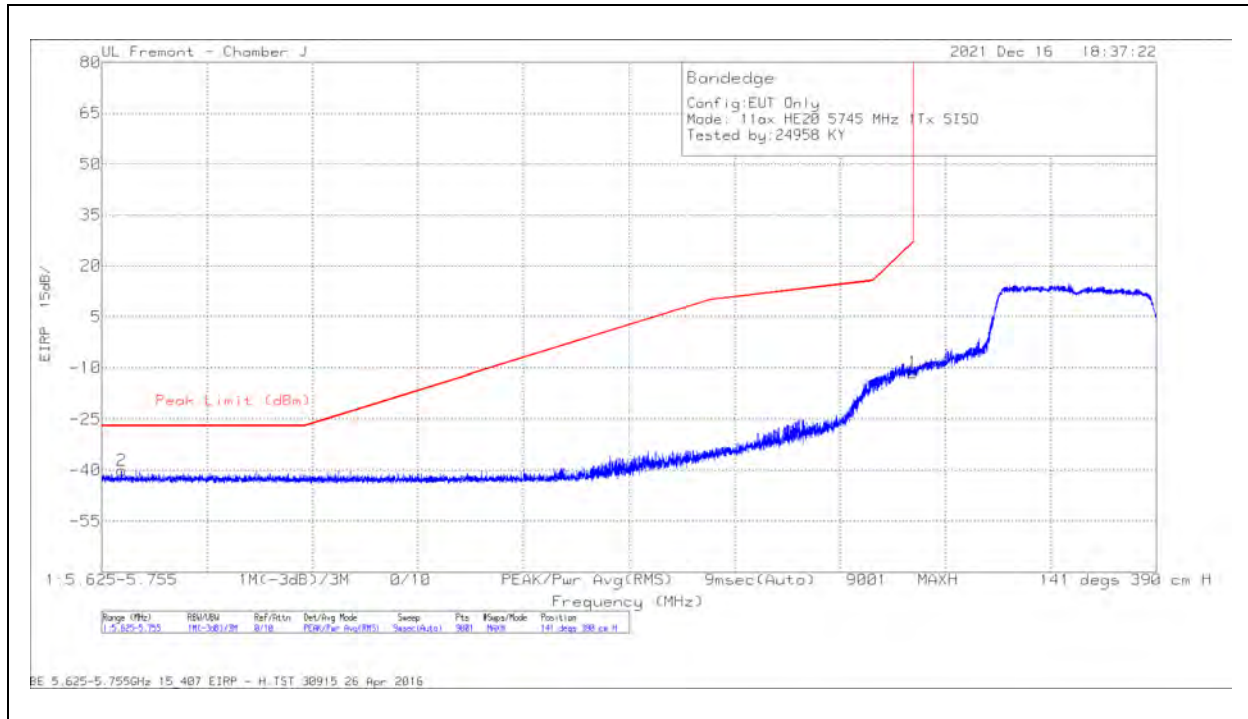
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-44.55	Pk	34.8	-15.1	11.8	0	-13.05	27	-40.05	205	265	H
2	5.971909	-69.91	Pk	35.1	-15	11.8	0	-38.01	-27	-11.01	205	265	H

Pk - Peak detector

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-48.77	Pk	34.8	-15.1	11.8	0	-17.27	27	-44.27	238	264	V
2	5.953932	-69.95	Pk	35.1	-15	11.8	0	-38.05	-27	-11.05	238	264	V

Pk - Peak detector

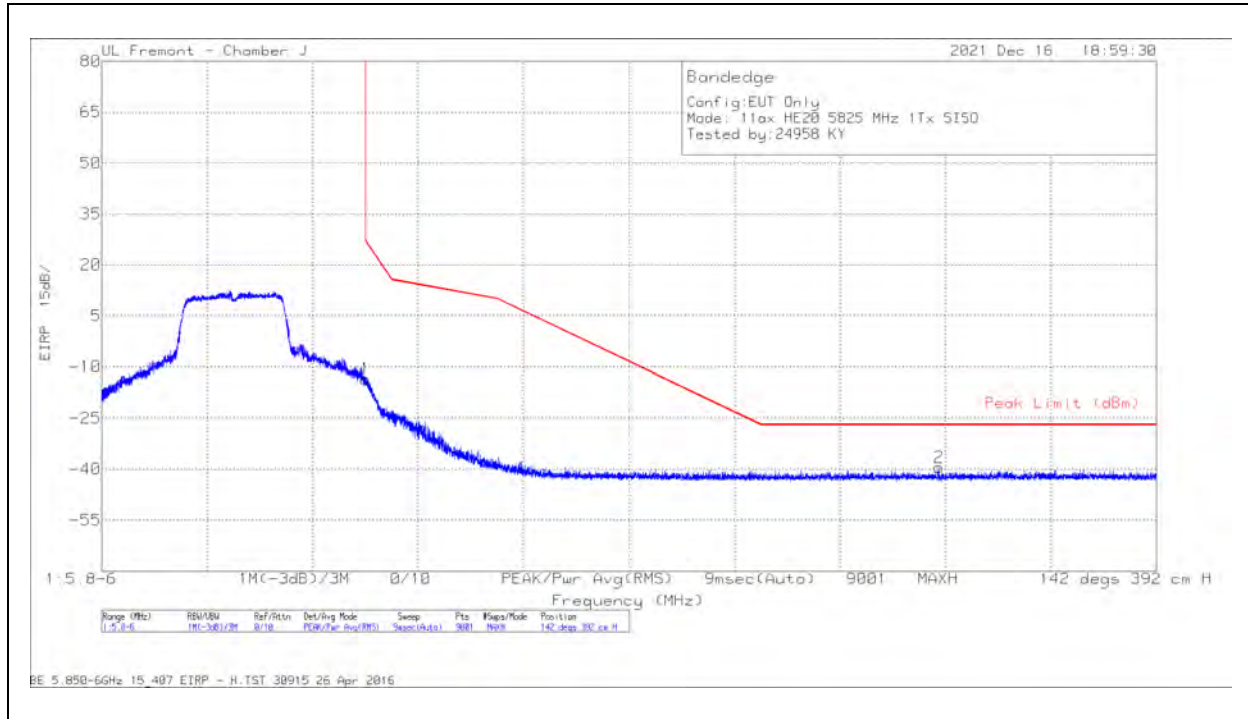
1TX Antenna 6 MODE: SU, Single User**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Filr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	-34.84	Pk	34.6	-22.9	11.8	0	-11.34	27	-38.34	141	390	H
2	5627.427	-63.38	Pk	34.5	-23	11.8	0	-40.08	-27	-13.08	141	390	H

Pk - Peak detector

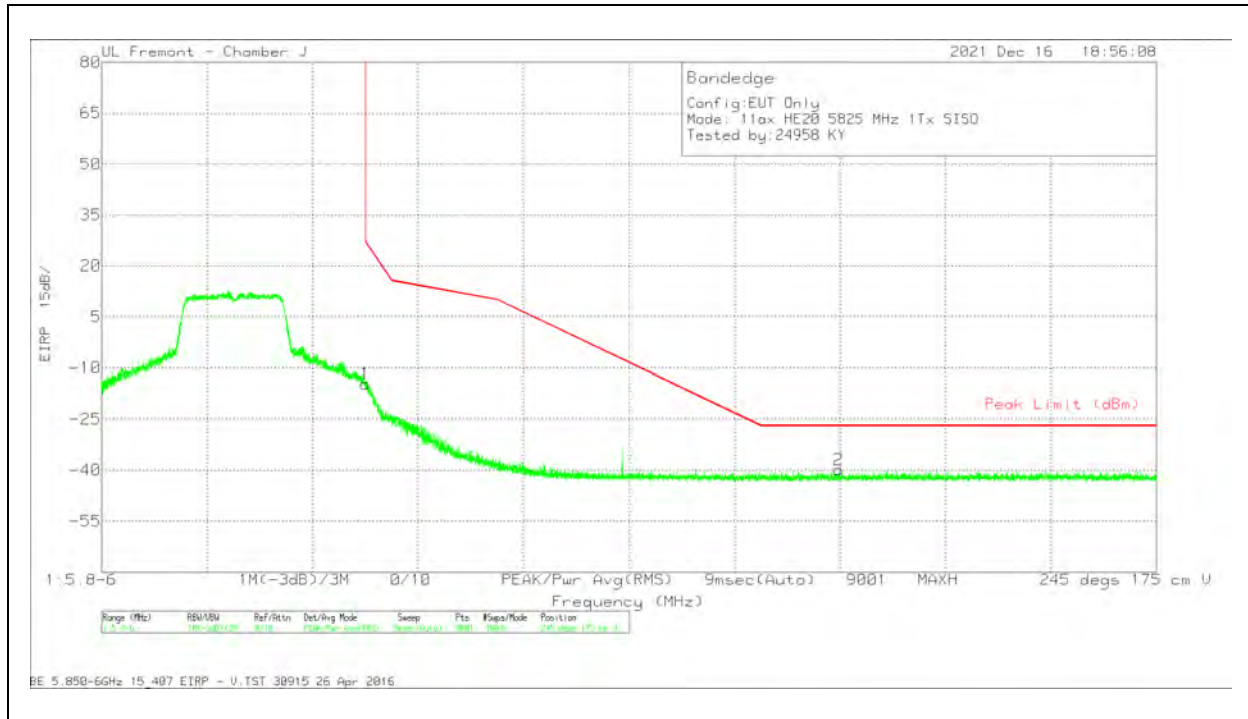
VERTICAL RESULT

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**

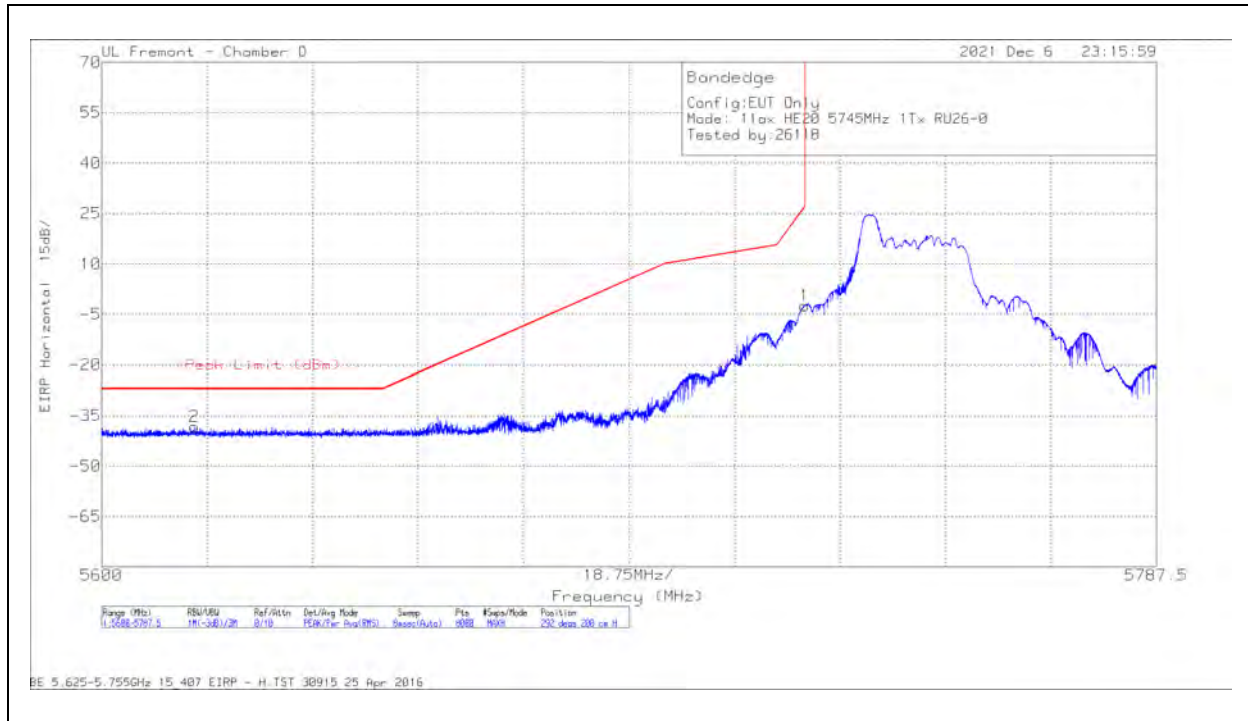
Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	CorrectedReadingEIRP	Peak Limit (dBm)	PK Margin(dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-37.85	Pk	35.1	-22.5	11.8	0	-13.45	27	-40.45	142	392	H
2	5958.71	-64.18	Pk	35.1	-22.3	11.8	0	-39.58	-27	-12.58	142	392	H

Pk - Peak detector

VERTICAL RESULT

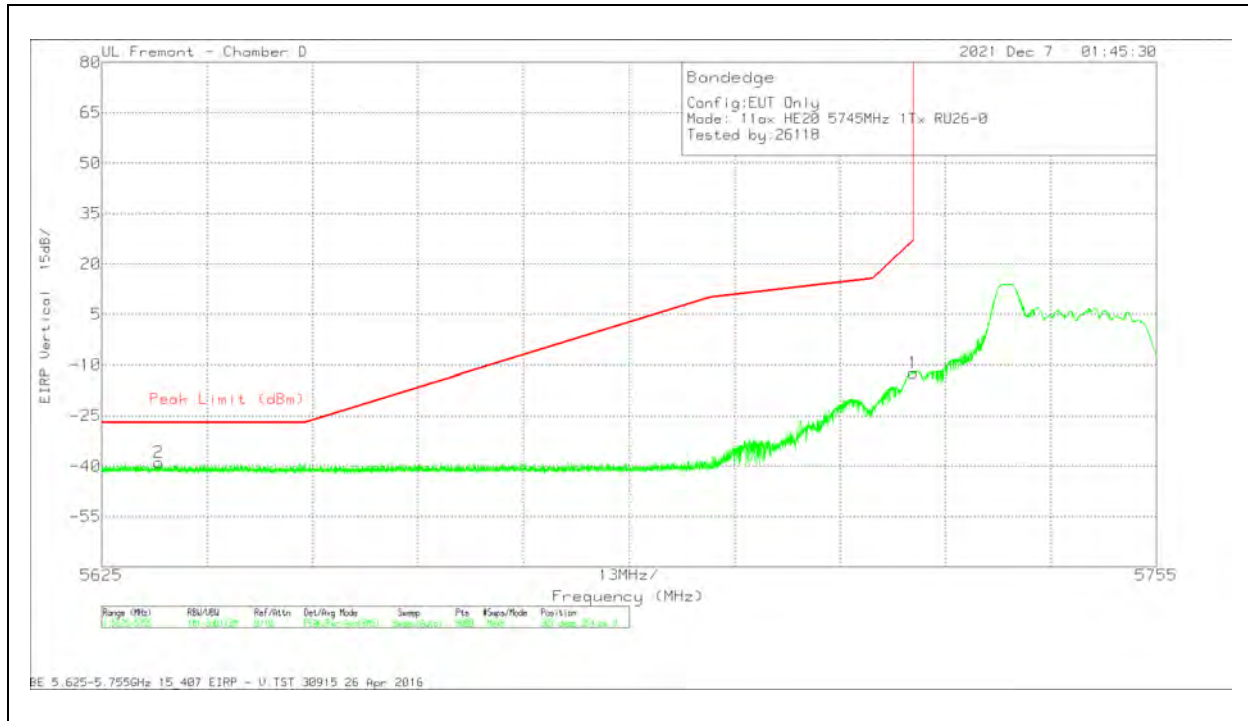
Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-39.1	Pk	35.1	-22.5	11.8	0	-14.7	27	-41.7	245	175	V
2	5939.71	-64.43	Pk	35.1	-22.3	11.8	0	-39.83	-27	-12.83	245	175	V

Pk - Peak detector

1TX Antenna 3 MODE: 26-Tones, RU Index 0**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5616.455	-67.04	Pk	34.7	-17.6	11.8	0	-38.14	-27	-11.14	292	200	H
1	5725	-31.04	Pk	34.6	-17.8	11.8	0	-2.44	27	-29.44	292	200	H

Pk - Peak detector

VERTICAL RESULT

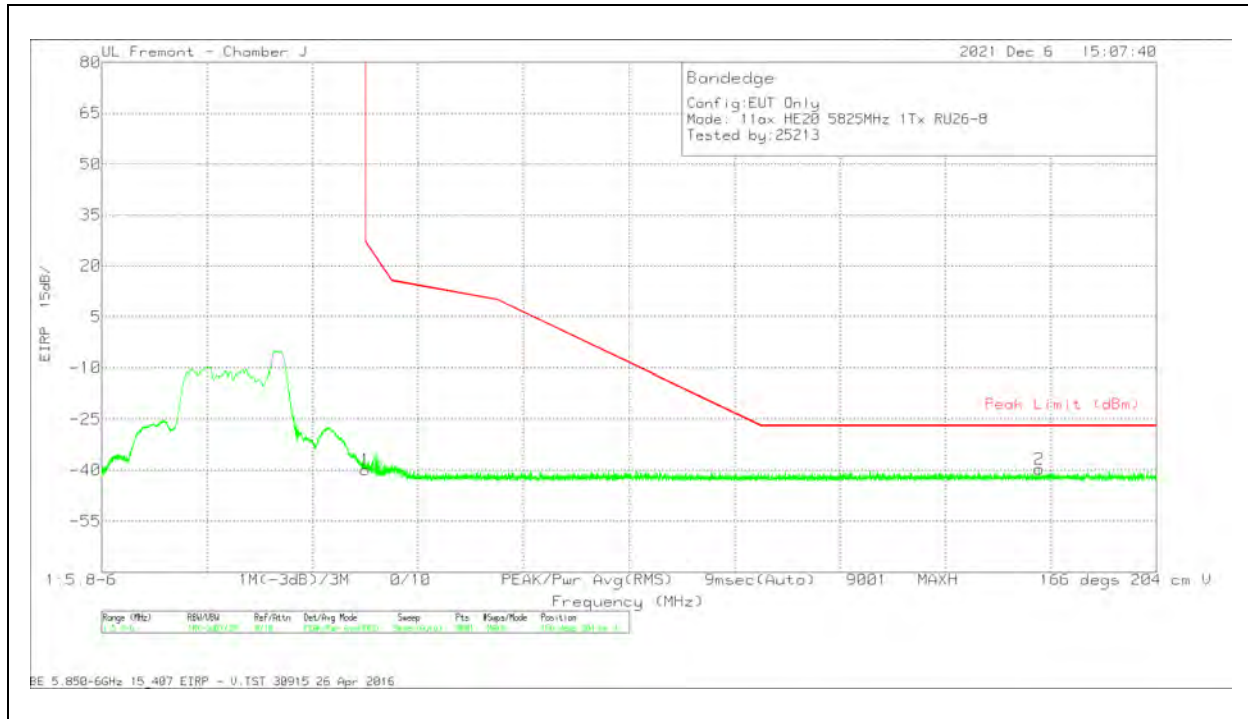
Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5632.021	-67.64	Pk	34.7	-17.6	11.8	0	-38.74	-27	-11.74	307	354	V
1	5725	-40.95	Pk	34.6	-17.8	11.8	0	-12.35	27	-39.35	307	354	V

Pk - Peak detector

1TX Antenna 3 MODE: 26-Tones, RU Index 8**BANDEDGE (HIGH CHANNEL)****HORIZONTAL RESULT**

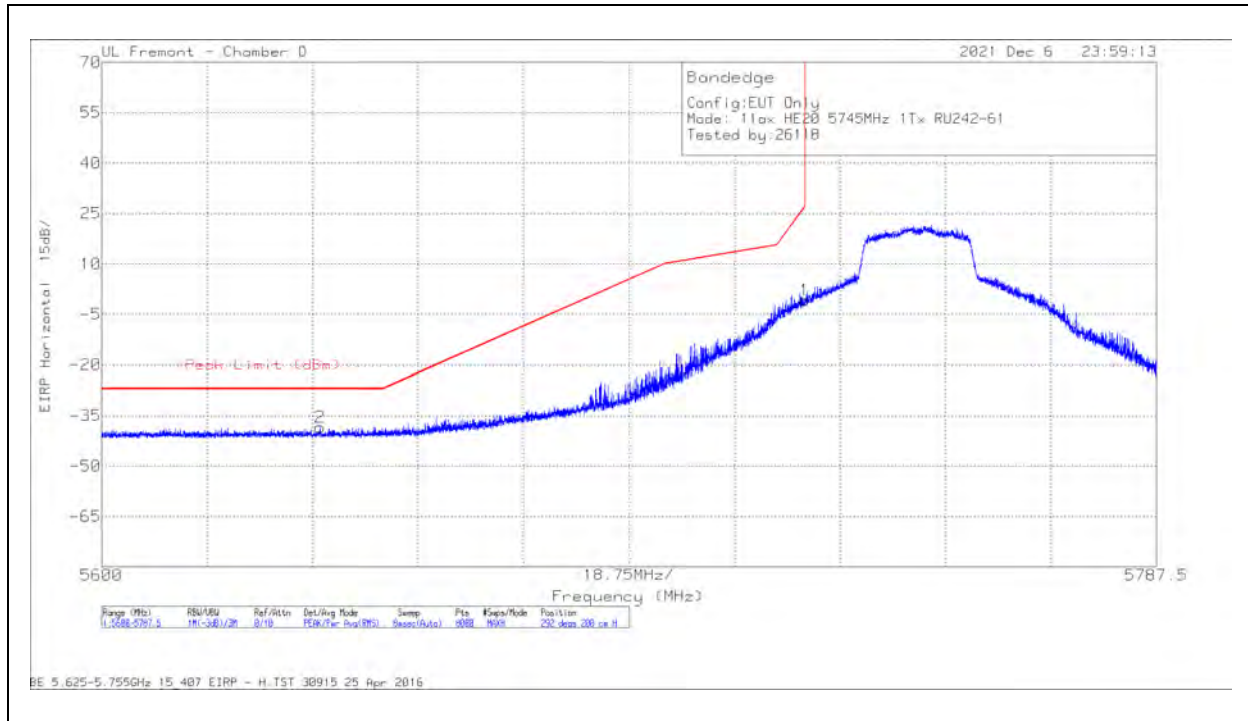
Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Filt/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-48.09	Pk	35.1	-22.5	11.8	0	-23.69	27	-50.69	26	117	H
2	5976.976	-64.35	Pk	35.1	-22.3	11.8	0	-39.75	-27	-12.75	26	117	H

Pk - Peak detector

VERTICAL RESULT

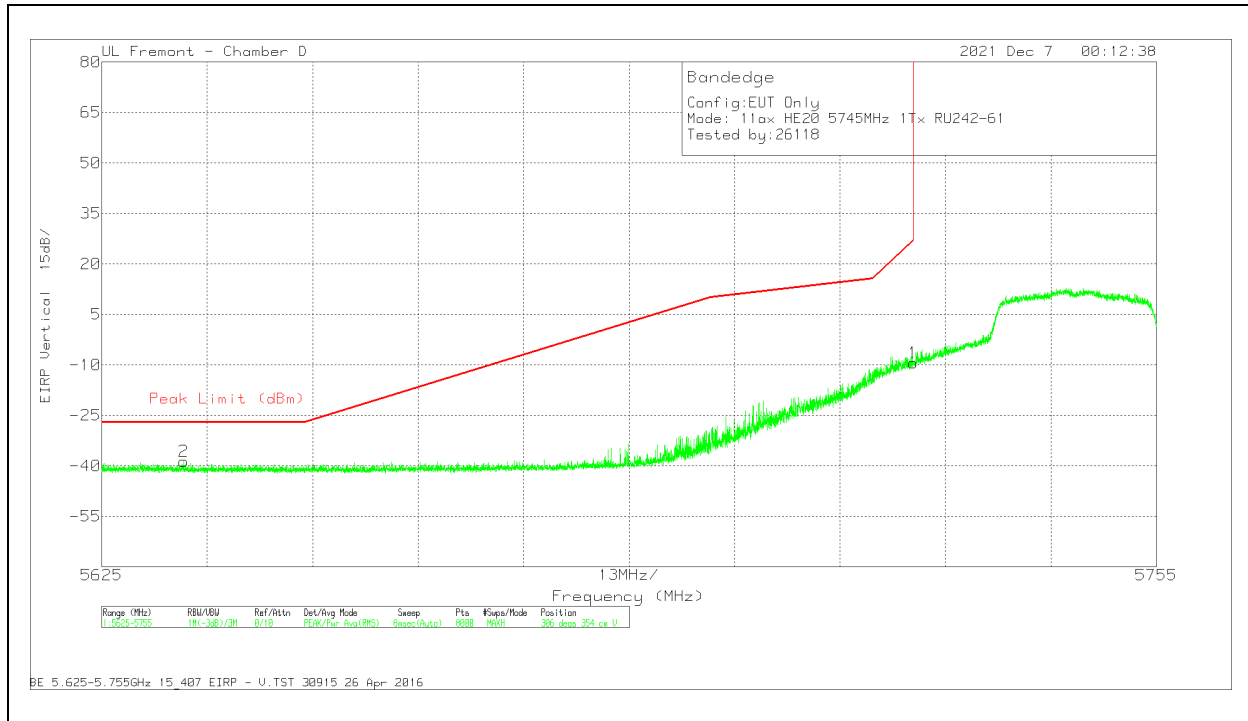
Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-64.33	Pk	35.1	-22.5	11.8	0	-39.93	27	-66.93	166	204	V
2	5977.732	-64.27	Pk	35.1	-22.3	11.8	0	-39.67	-27	-12.67	166	204	V

Pk - Peak detector

1TX Antenna 3 MODE: 242-Tones, RU Index 61**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**

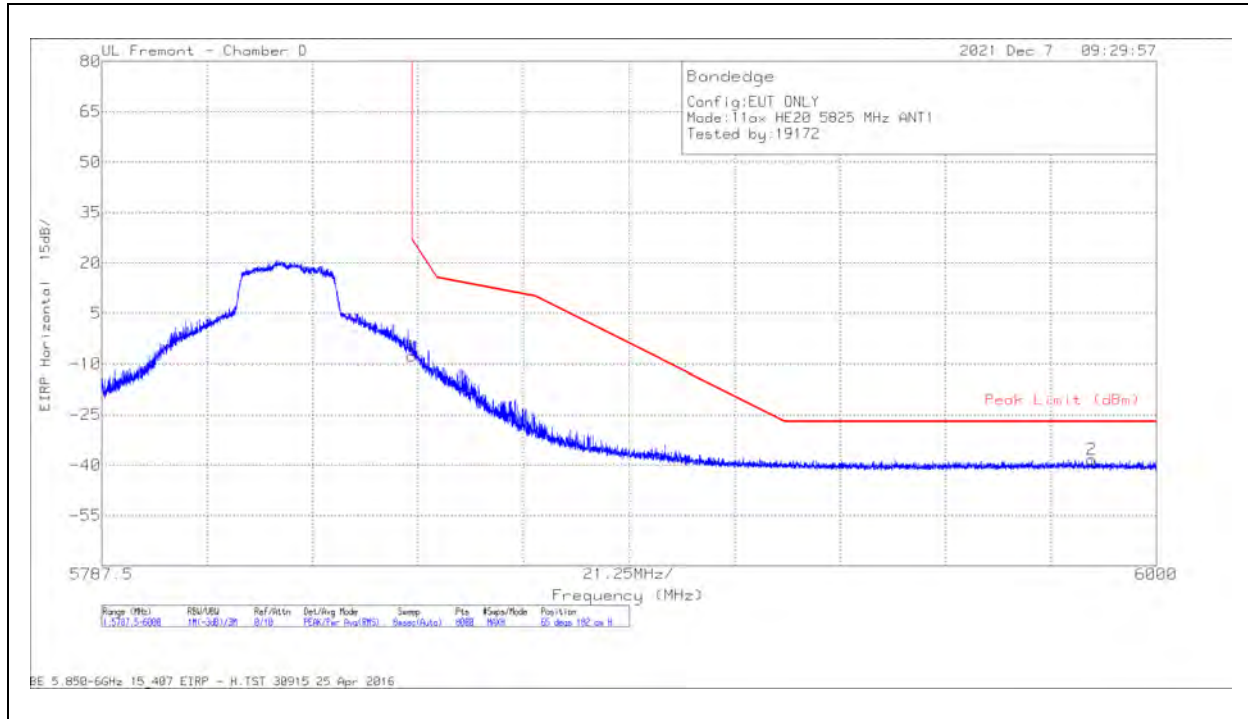
Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5638.817	-67.04	Pk	34.6	-17.7	11.8	0	-38.34	-27	-11.34	292	200	H
1	5725	-29.43	Pk	34.6	-17.8	11.8	0	-83	27	-27.83	292	200	H

Pk - Peak detector

VERTICAL RESULT

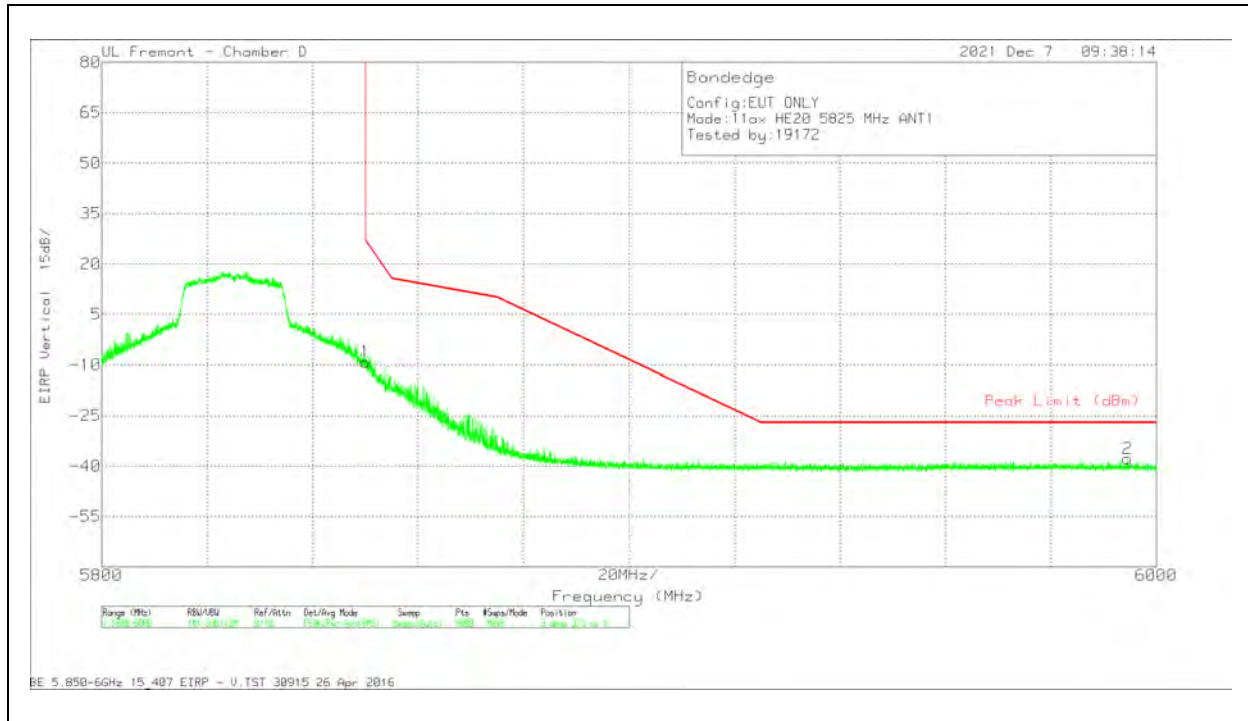
Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5635.092	-67.47	Pk	34.7	-17.7	11.8	0	-38.67	-27	-11.67	306	354	V
1	5725	-37.91	Pk	34.6	-17.8	11.8	0	-9.31	27	-36.31	306	354	V

Pk - Peak detector

BANDEGE (HIGH CHANNEL)**HORIZONTAL RESULT**

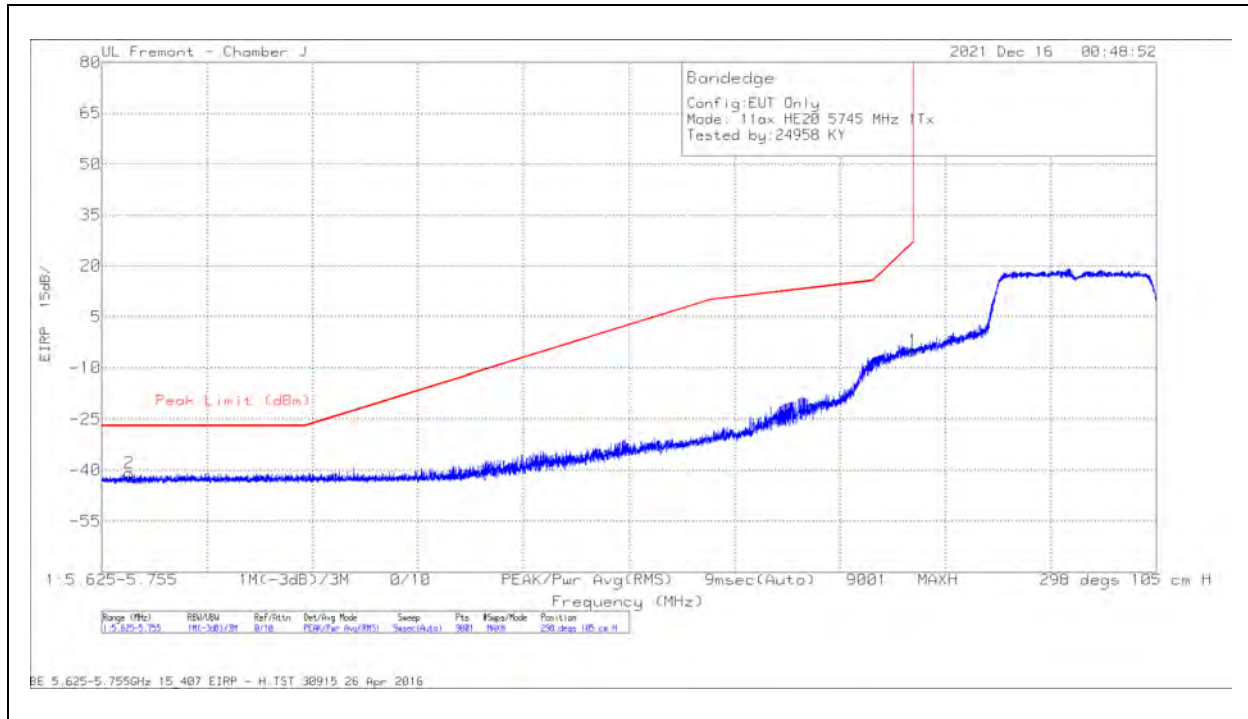
Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-36.43	Pk	34.8	-17.8	11.8	0	-7.63	27	-34.63	65	182	H
2	5986.984	-67.64	Pk	35.3	-17.7	11.8	0	-38.24	-27	-11.24	65	182	H

Pk - Peak detector

VERTICAL RESULT

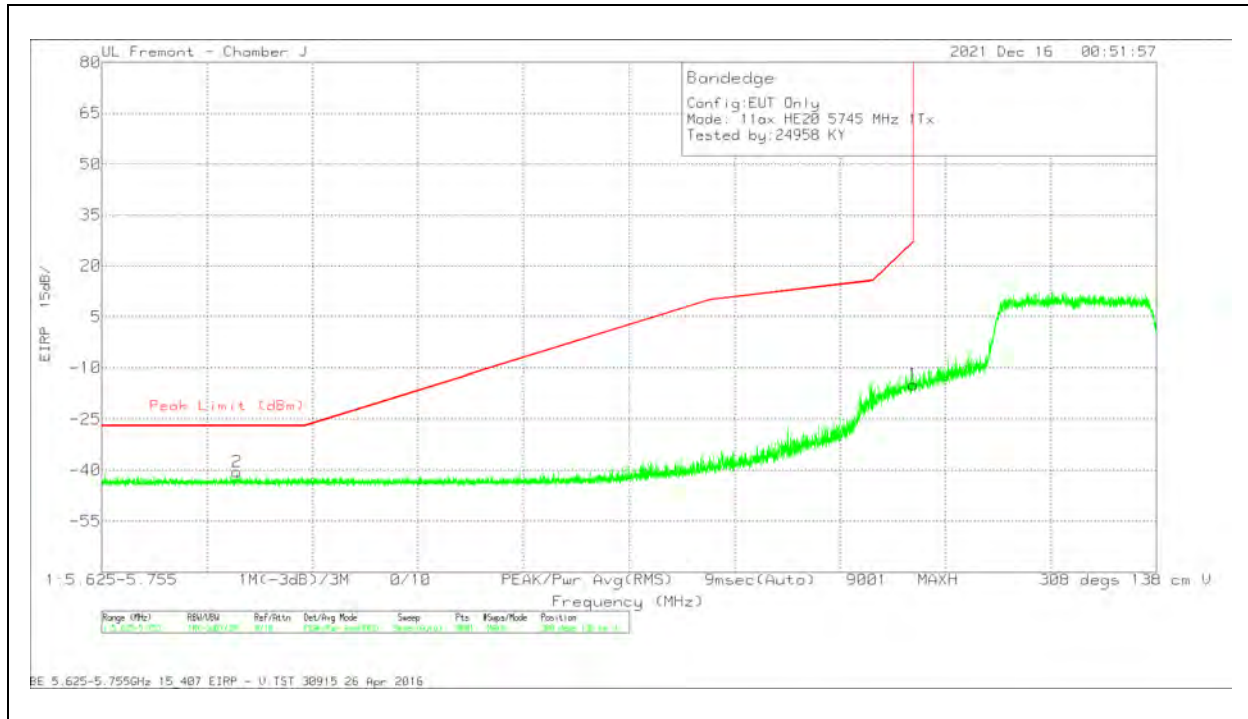
Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-37.91	Pk	34.8	-17.8	11.8	0	-9.11	27	-36.11	3	373	V
2	5994.473	-67.11	Pk	35.2	-17.6	11.8	0	-37.71	-27	-10.71	3	373	V

Pk - Peak detector

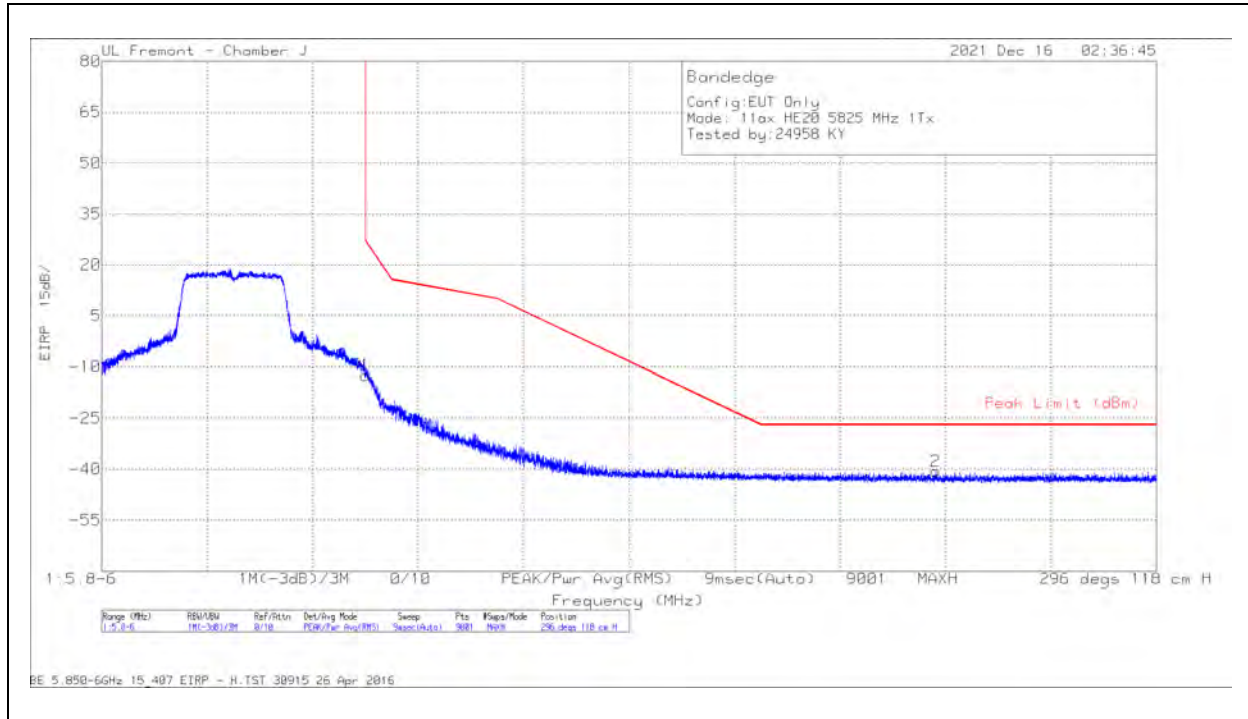
1TX Antenna 3 MODE: SU, Single User**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Filr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	-28.47	Pk	34.6	-22.9	11.8	0	-4.97	27	-31.97	298	105	H
2	5628.423	-64.06	Pk	34.5	-23	11.8	0	-40.76	-27	-13.76	298	105	H

Pk - Peak detector

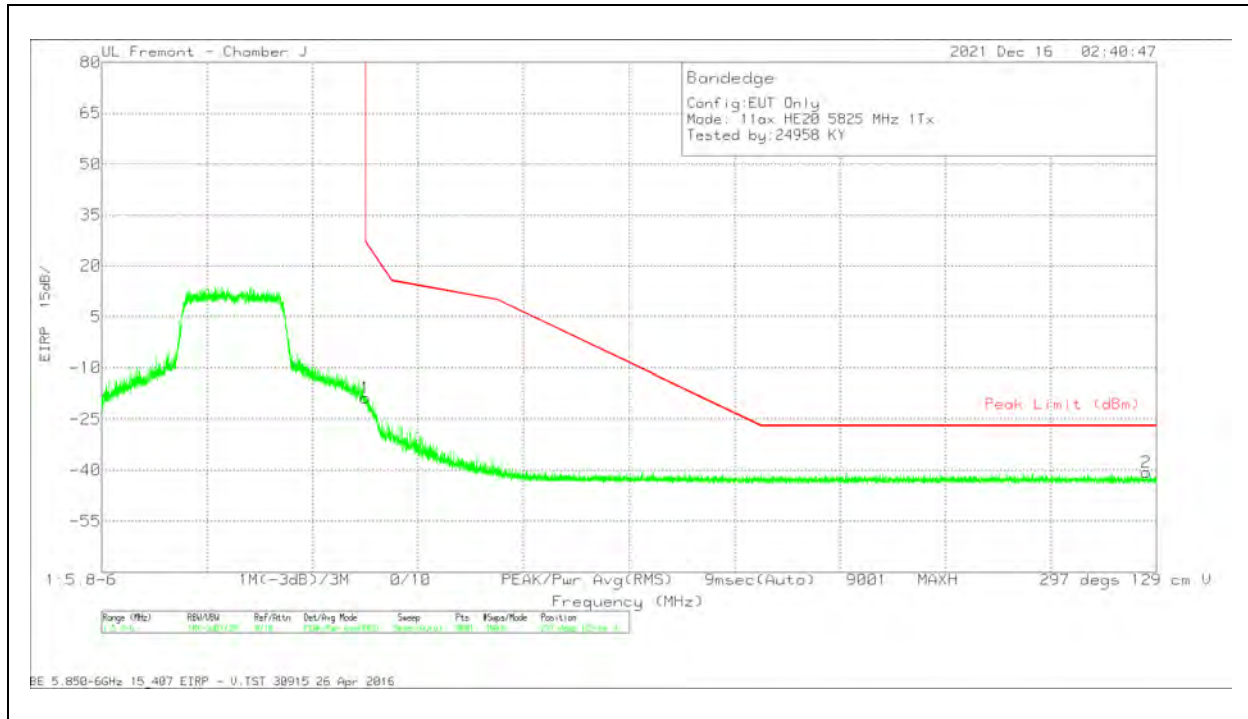
VERTICAL RESULT

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-36.81	Pk	35.1	-22.5	11.8	0	-12.41	27	-39.41	296	118	H
2	5958.221	-65.22	Pk	35.1	-22.3	11.8	0	-40.62	-27	-13.62	296	118	H

Pk - Peak detector

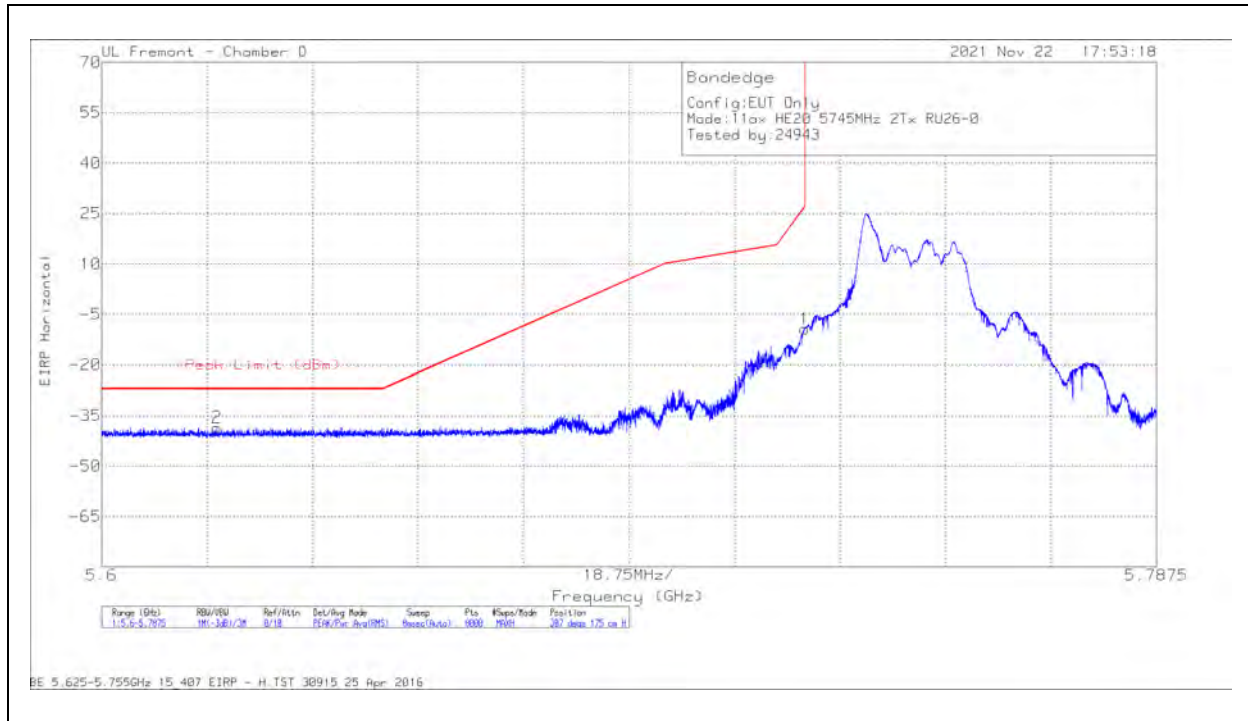
VERTICAL RESULT

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-43.1	Pk	35.1	-22.5	11.8	0	-18.7	27	-45.7	297	129	V
2	5998.065	-65.25	Pk	35.1	-22.2	11.8	0	-40.55	-27	-13.55	297	129	V

Pk - Peak detector

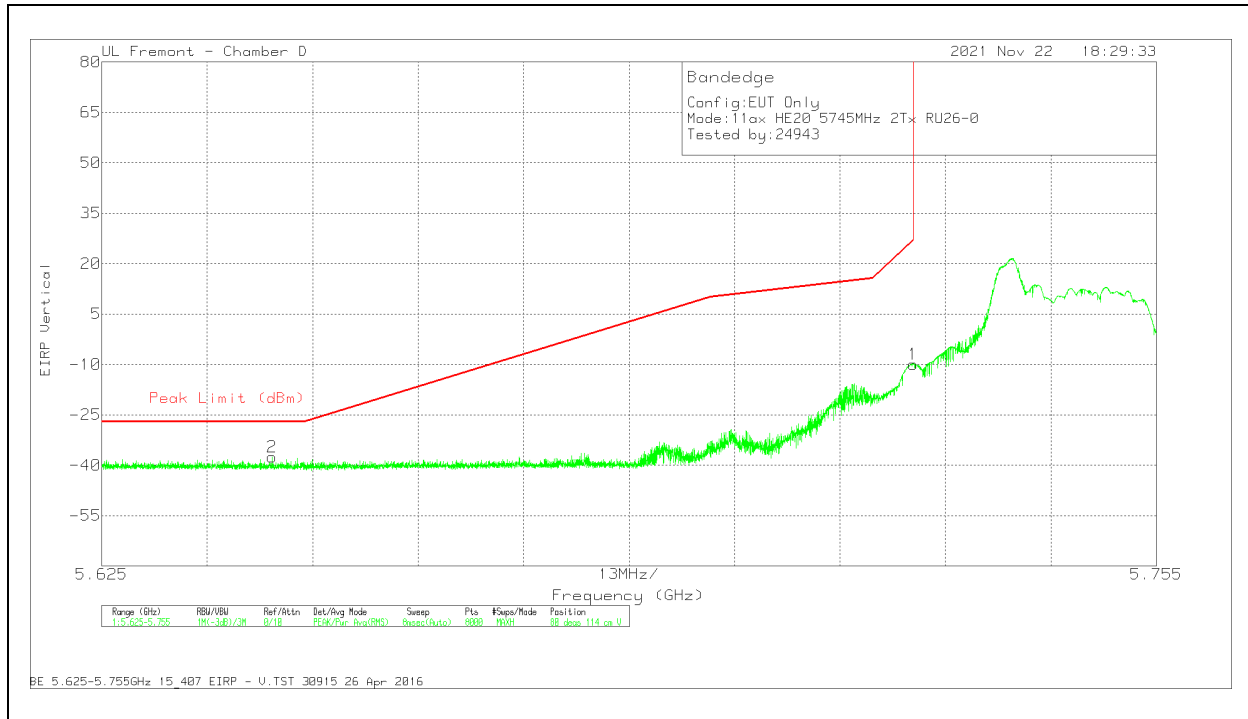
2TX Antenna 6 + Antenna 3 OFDMA MODE: 26-Tones, RU Index 0
BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT



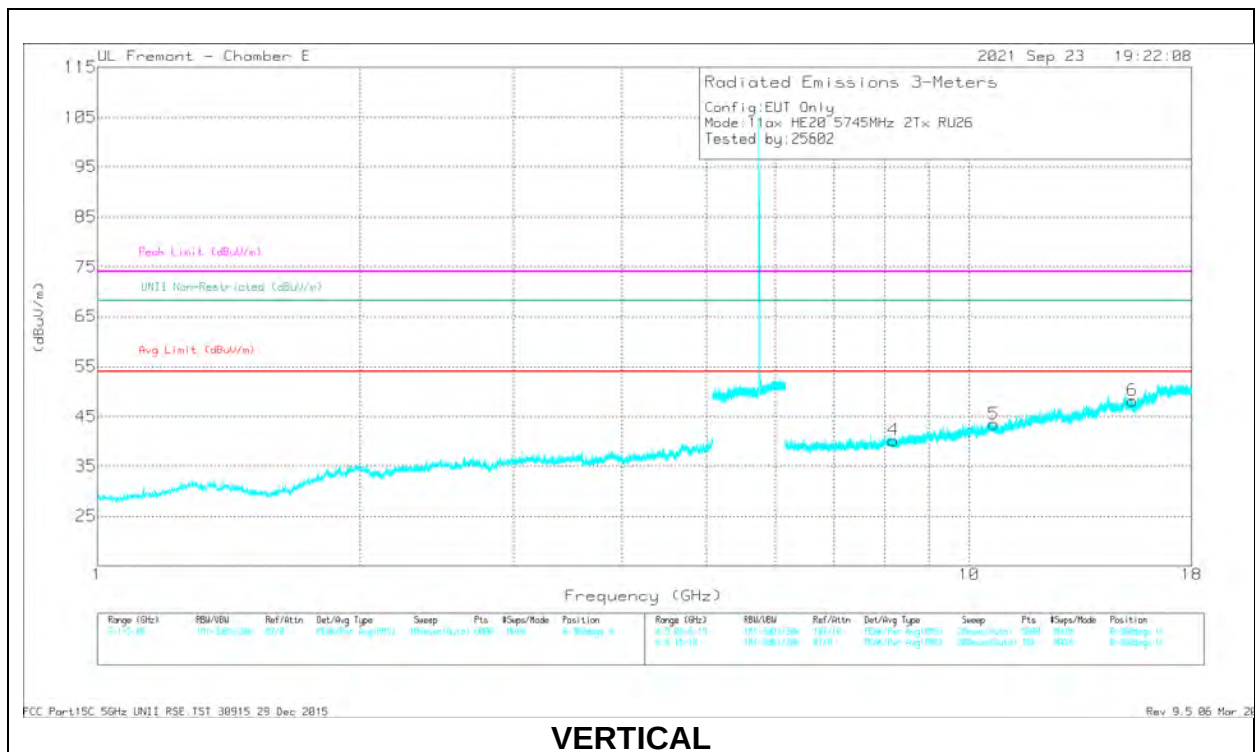
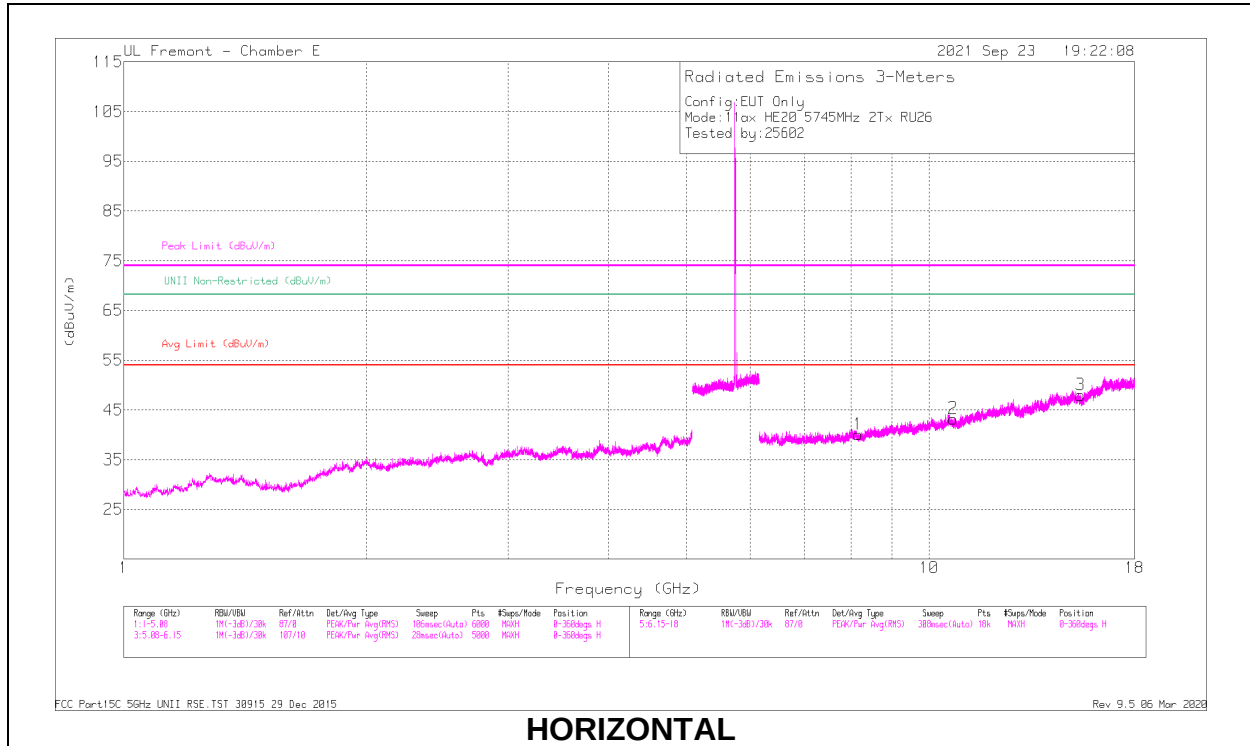
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62051	-67.28	Pk	34.6	-17.6	11.8	0	-38.48	-27	-11.48	307	175	H
1	5.725	-37.94	Pk	34.6	-17.8	11.8	0	-9.34	27	-36.34	307	175	H

Pk - Peak detector

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Ampl/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64598	-66.49	Pk	34.7	-17.6	11.8	0	-37.59	-27	-10.59	80	114	V
1	5.725	-38.48	Pk	34.6	-17.8	11.8	0	-9.88	27	-36.88	80	114	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS**LOW CHANNEL RESULTS**

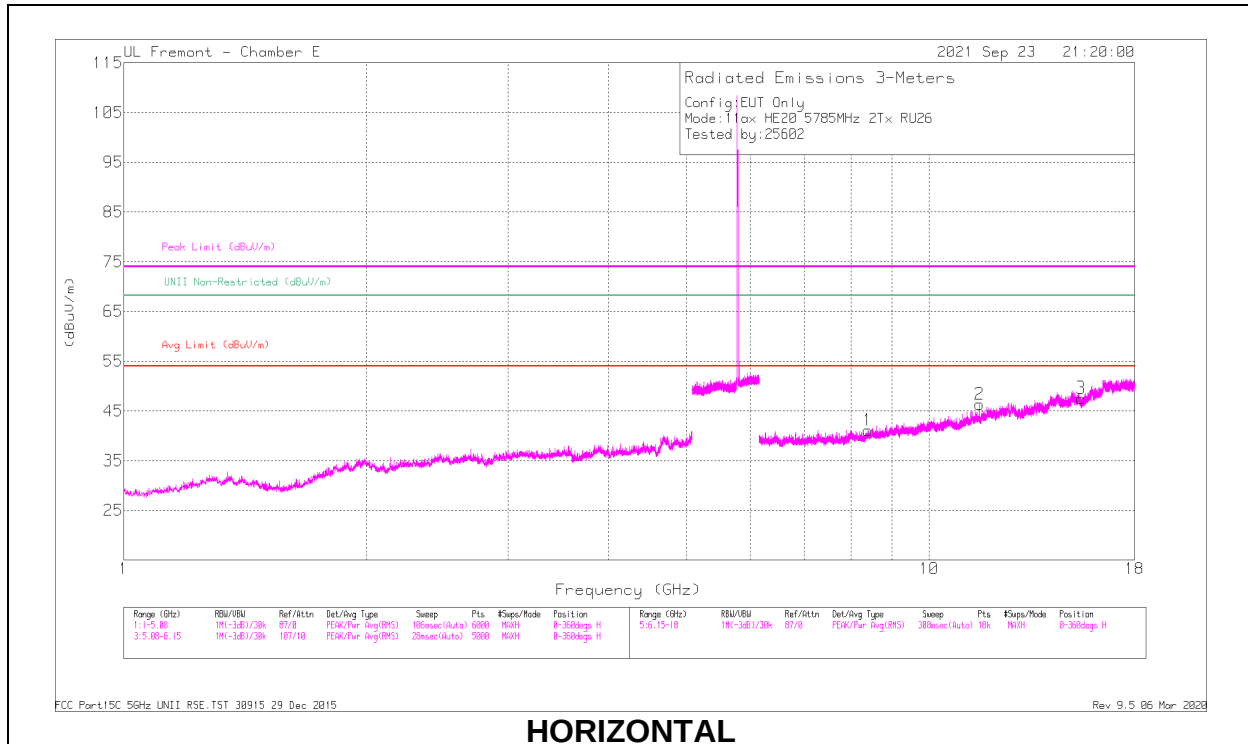
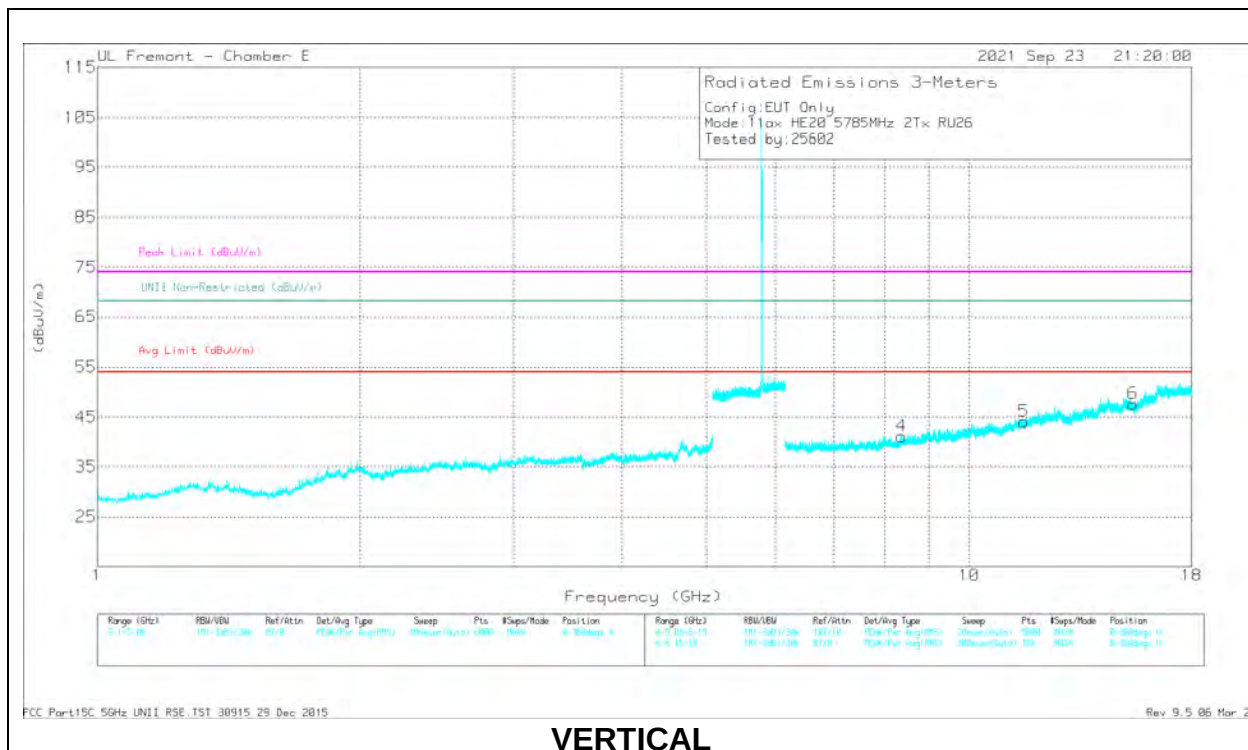
RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF PRE0078107 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 8.17337	37.9	PK-U	35.8	-26.5	47.2	-	-	74	-26.8	360	200	H
	* 8.1755	26.86	ADR	35.8	-26.5	36.16	54	-17.84	-	-	360	200	H
2	* 10.71832	37.04	PK-U	37.7	-24.6	50.14	-	-	74	-23.86	360	101	H
	* 10.7208	25.86	ADR	37.7	-24.6	38.96	54	-15.04	-	-	360	101	H
3	* 15.40811	34.96	PK-U	40.1	-20.4	54.66	-	-	74	-19.34	360	200	H
	* 15.4098	24.02	ADR	40.1	-20.4	43.72	54	-10.28	-	-	360	200	H
4	* 8.19038	38.42	PK-U	35.9	-26.6	47.72	-	-	74	-26.28	360	200	V
	* 8.19014	26.7	ADR	35.9	-26.6	36	54	-18	-	-	360	200	V
5	* 10.6851	37.1	PK-U	37.7	-24.7	50.1	-	-	74	-23.9	360	101	V
	* 10.68548	25.9	ADR	37.7	-24.7	38.9	54	-15.1	-	-	360	101	V
6	* 15.39851	36.16	PK-U	40.1	-20.4	55.86	-	-	74	-18.14	360	101	V
	* 15.4004	24.04	ADR	40.1	-20.4	43.74	54	-10.26	-	-	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS**HORIZONTAL****VERTICAL**

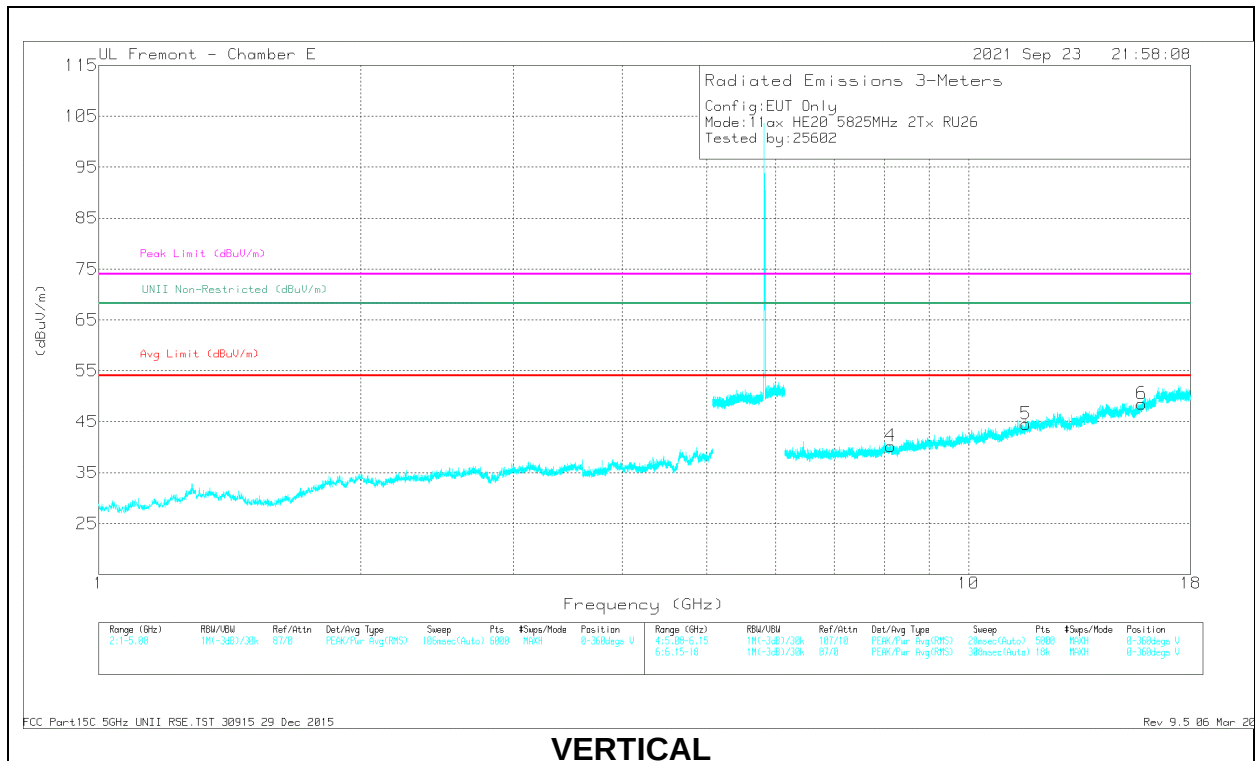
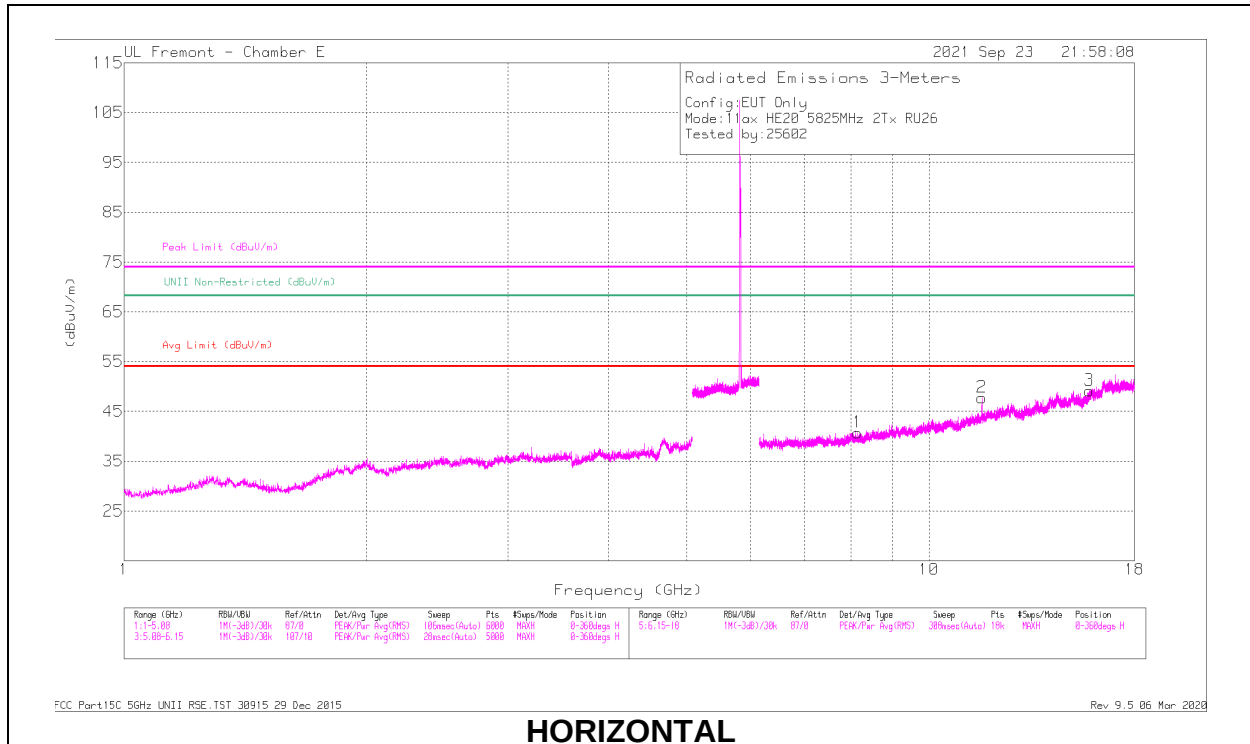
RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF PRE0078107 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 8.3927	36.89	PK-U	35.9	-25.7	47.09	-	-	74	-26.91	360	101	H
	* 8.39389	25.98	ADR	35.9	-25.7	36.18	54	-17.82	-	-	360	101	H
2	* 11.55331	37.52	PK-U	38.2	-22.7	53.02	-	-	74	-20.98	170	253	H
	* 11.55303	25.55	ADR	38.2	-22.7	41.05	54	-12.95	-	-	170	253	H
3	* 15.43513	35.77	PK-U	40.2	-20.3	55.67	-	-	74	-18.33	170	101	H
	* 15.43496	23.85	ADR	40.2	-20.3	43.75	54	-10.25	-	-	170	101	H
4	* 8.36514	36.63	PK-U	35.8	-25.8	46.63	-	-	74	-27.37	170	200	V
	* 8.36459	25.66	ADR	35.8	-25.8	35.66	54	-18.34	-	-	170	200	V
5	* 11.5542	35.62	PK-U	38.3	-22.7	51.22	-	-	74	-22.78	170	101	V
	* 11.554	24.43	ADR	38.3	-22.7	40.03	54	-13.97	-	-	170	101	V
6	* 15.43395	34.75	PK-U	40.2	-20.3	54.65	-	-	74	-19.35	170	101	V
	* 15.43301	23.79	ADR	40.2	-20.3	43.69	54	-10.31	-	-	170	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF PRE0078107 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 8.15039	37.51	PK-U	35.9	-26.5	46.91	-	-	74	-27.09	0	101	H
	* 8.15222	26.37	ADR	35.9	-26.5	35.77	54	-18.23	-	-	0	101	H
2	* 11.63394	39.62	PK-U	38.4	-21.6	56.42	-	-	74	-17.58	230	102	H
	* 11.63308	27.54	ADR	38.4	-21.6	44.34	54	-9.66	-	-	230	102	H
3	* 15.81998	34.44	PK-U	40.5	-20	54.94	-	-	74	-19.06	230	102	H
	* 15.82083	23.73	ADR	40.5	-20	44.23	54	-9.77	-	-	230	102	H
4	* 8.13849	37.9	PK-U	35.8	-26.4	47.3	-	-	74	-26.7	230	200	V
	* 8.13819	26.34	ADR	35.8	-26.4	35.74	54	-18.26	-	-	230	200	V
5	* 11.64598	35.87	PK-U	38.4	-21.6	52.67	-	-	74	-21.33	230	200	V
	* 11.6451	23.68	ADR	38.4	-21.6	40.48	54	-13.52	-	-	230	200	V
6	* 15.82485	34.73	PK-U	40.5	-20	55.23	-	-	74	-18.77	230	101	V
	* 15.8244	23.89	ADR	40.5	-20	44.39	54	-9.61	-	-	230	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 6 + Antenna 3 OFDMA MODE: 26-Tones, RU Index 8**BANDEDGE (HIGH CHANNEL)****HORIZONTAL RESULT**

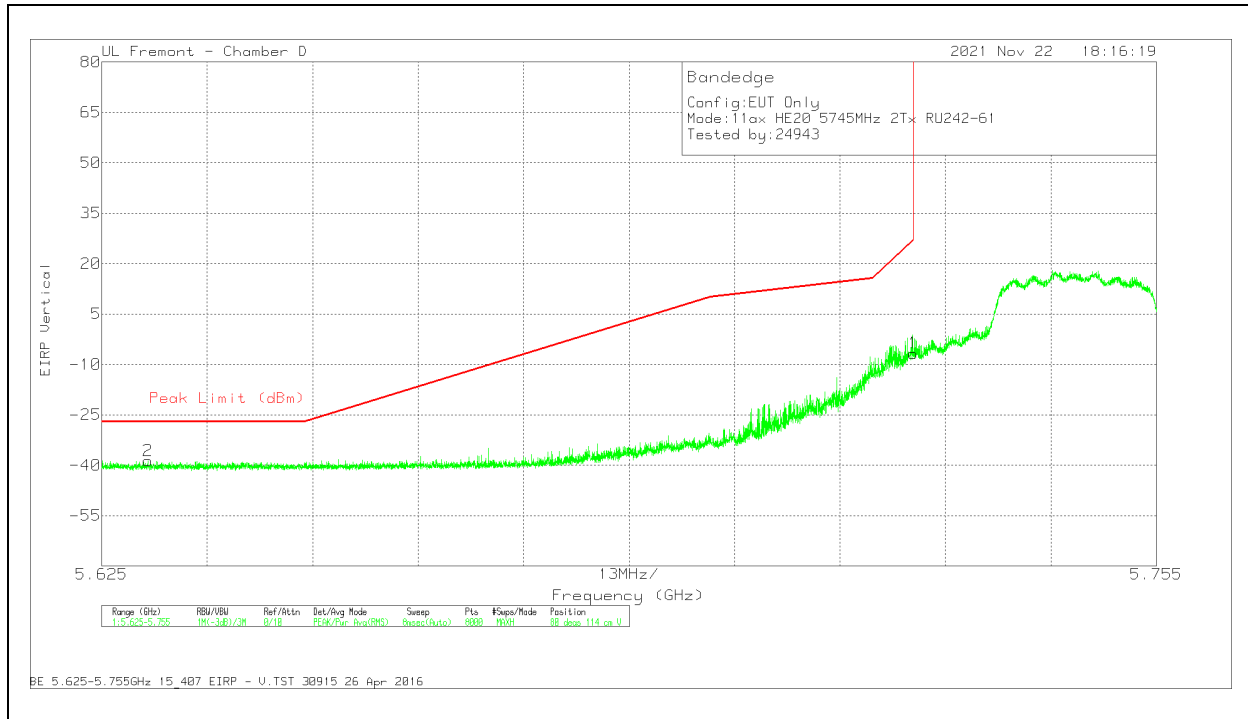
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-49.12	Pk	34.8	-17.8	11.8	0	-20.32	27	-47.32	218	133	H
2	5.97734	-67.44	Pk	35.2	-17.6	11.8	0	-38.04	-27	-11.04	218	133	H

Pk - Peak detector

VERTICAL RESULT

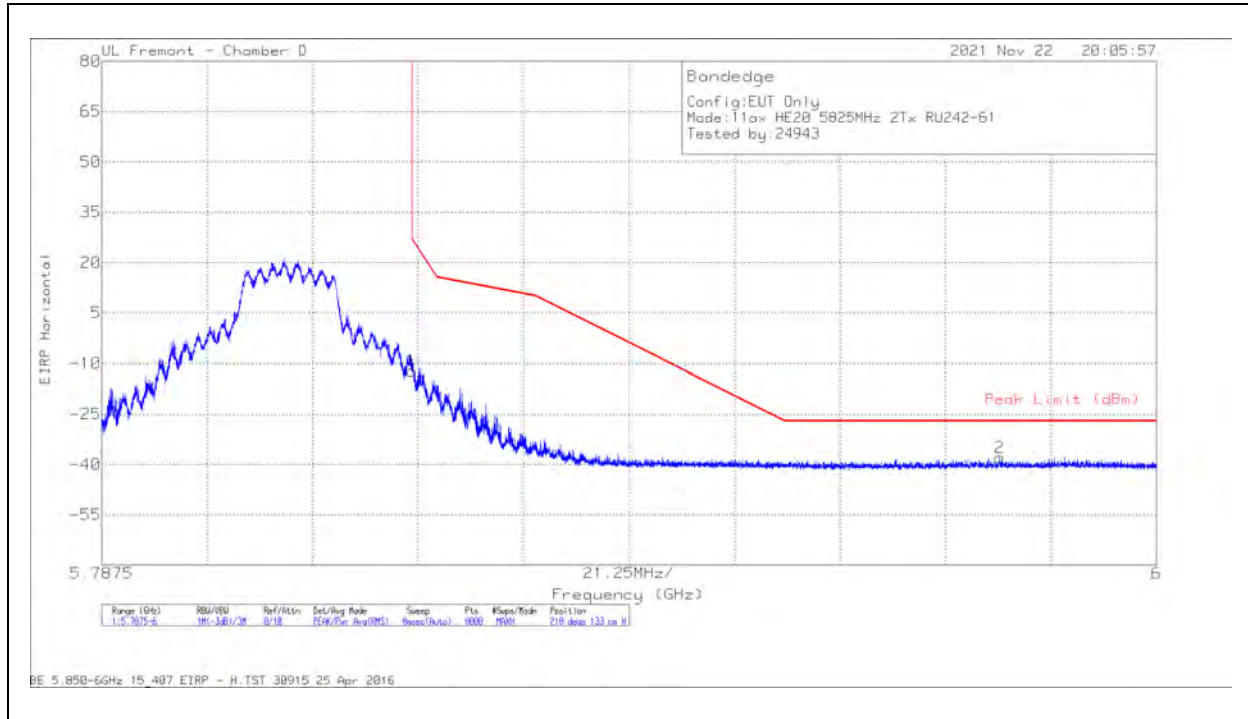
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Ampl/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-46.17	Pk	34.8	-17.8	11.8	0	-17.37	27	-44.37	78	125	V
2	5.95937	-66.83	Pk	35.1	-17.5	11.8	0	-37.43	-27	-10.43	78	125	V

Pk - Peak detector

VERTICAL RESULT

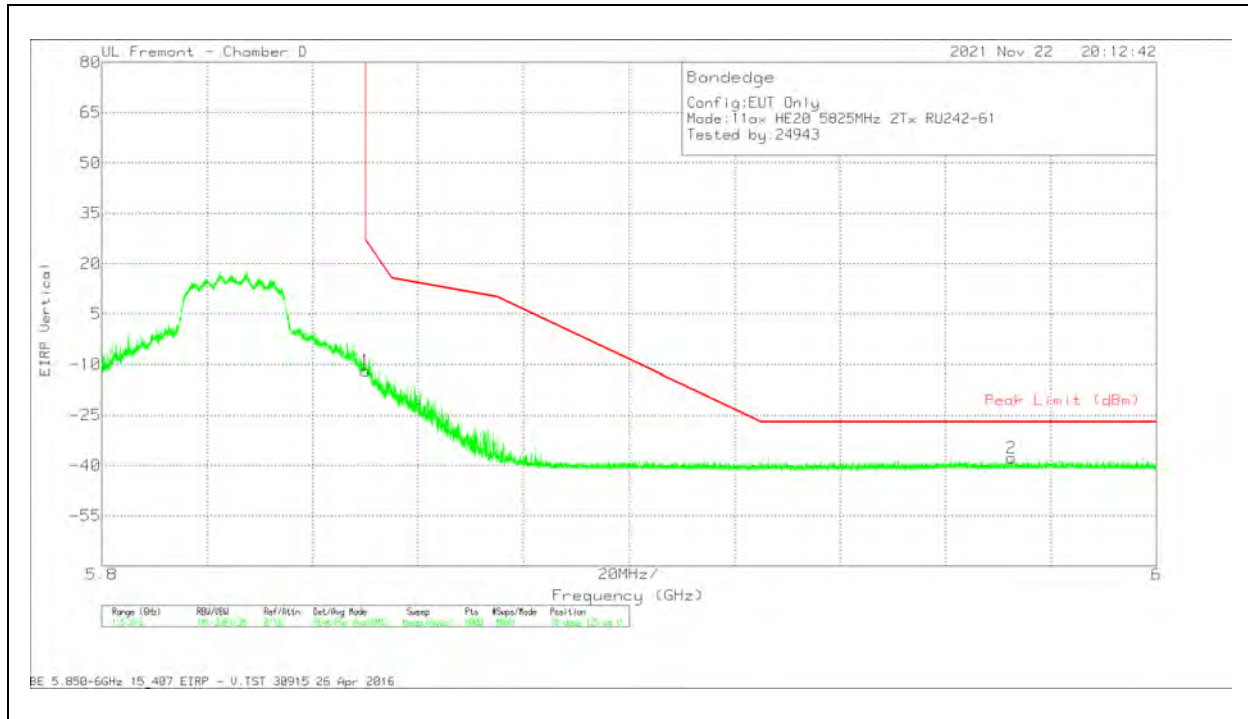
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Ampl/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.6307	-67.54	Pk	34.7	-17.6	11.8	0	-38.64	-27	-11.64	80	114	V
1	5.725	-35.28	Pk	34.6	-17.8	11.8	0	-6.68	27	-33.68	80	114	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**

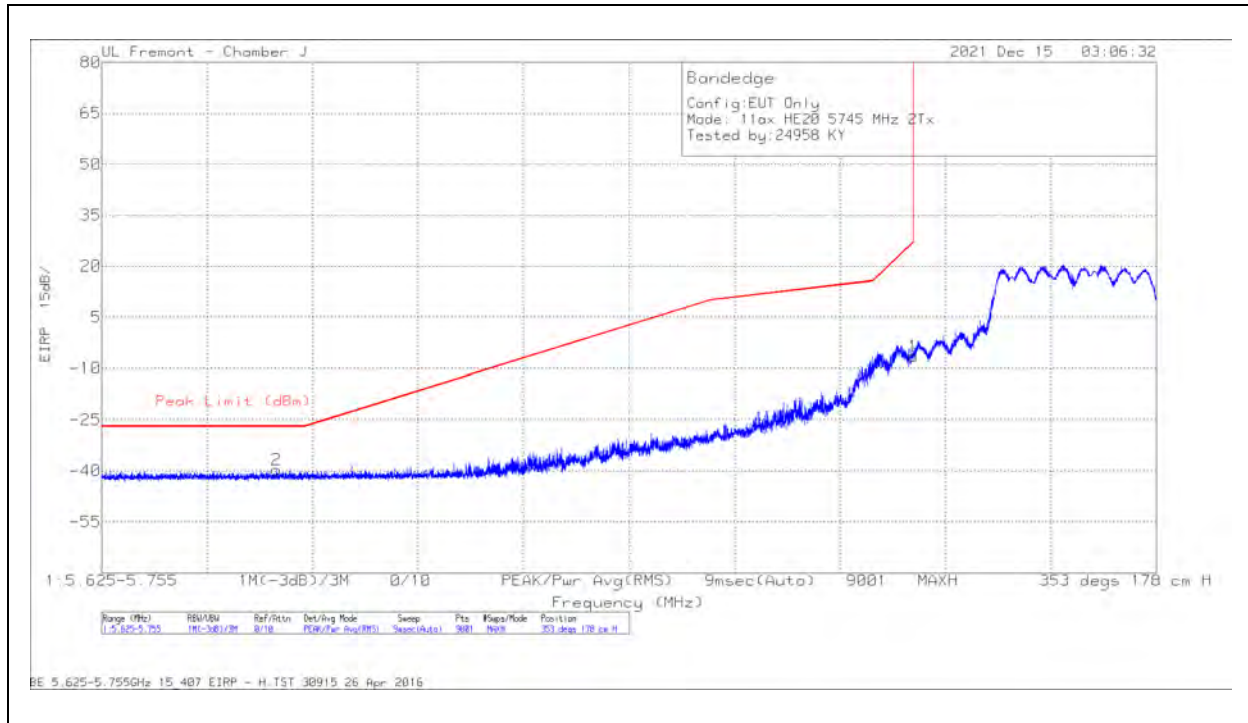
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-40.92	Pk	34.8	-17.8	11.8	0	-12.12	27	-39.12	218	133	H
2	5.96847	-67.24	Pk	35.2	-17.6	11.8	0	-37.84	-27	-10.84	218	133	H

Pk - Peak detector

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Ampl/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-40.6	Pk	34.8	-17.8	11.8	0	-11.8	27	-38.8	78	125	V
2	5.97252	-67.02	Pk	35.1	-17.6	11.8	0	-37.72	-27	-10.72	78	125	V

Pk - Peak detector

2TX Antenna 6 + Antenna 3 OFDMA MODE: SU, Single User**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**

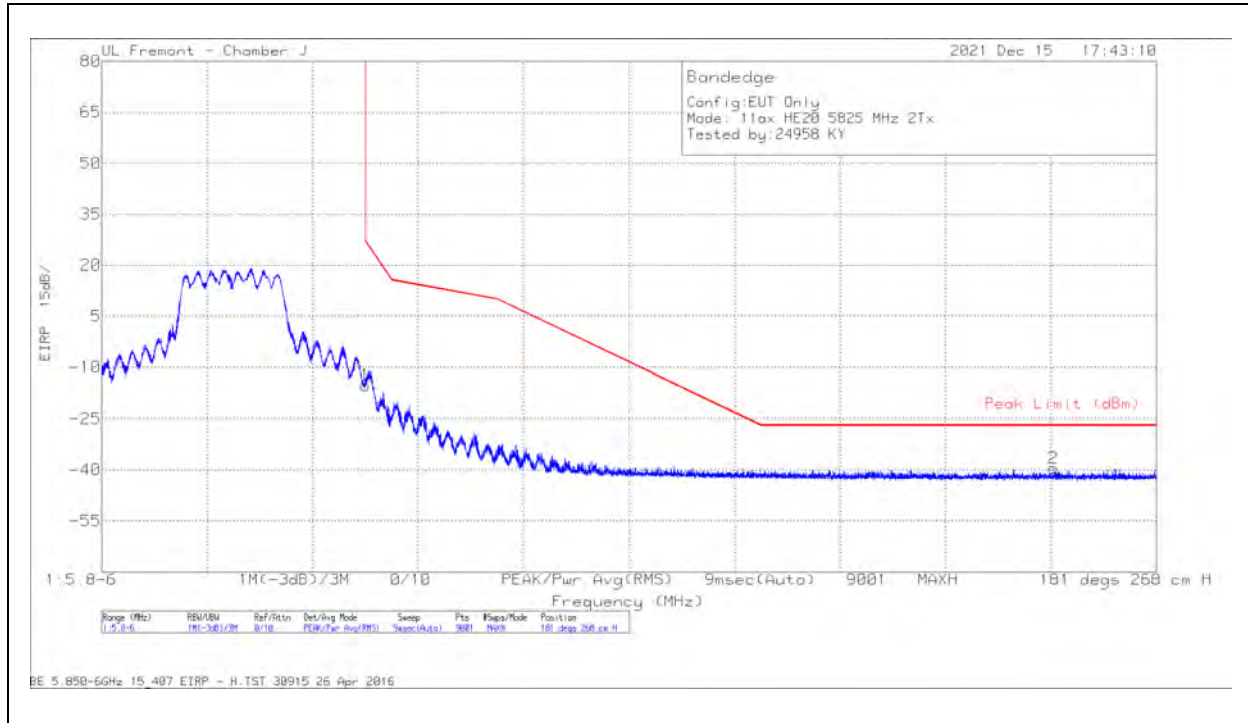
Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	-29.95	Pk	34.6	-22.9	11.8	0	-6.45	27	-33.45	353	178	H
2	5646.579	-63.07	Pk	34.5	-23	11.8	0	-39.77	-27	-12.77	353	178	H

Pk - Peak detector

VERTICAL RESULT

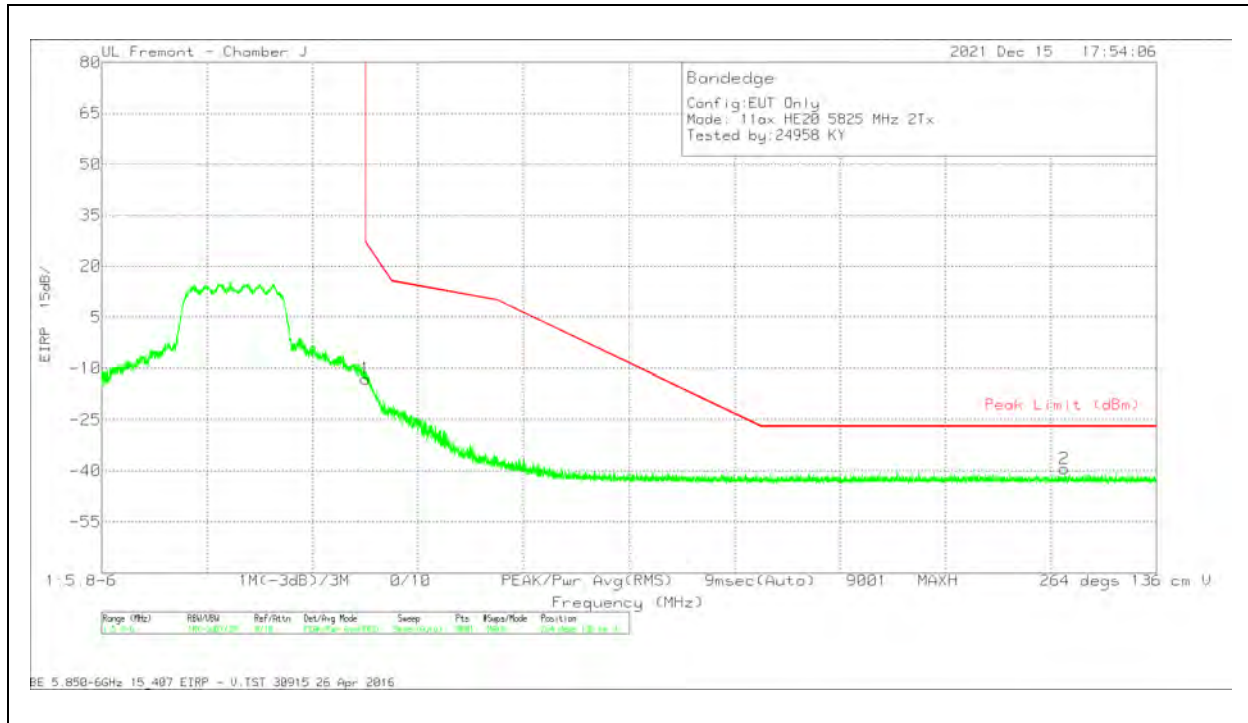
Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	-34.61	Pk	34.6	-22.9	11.8	0	-11.11	27	-38.11	247	130	V
2	5630.055	-63	Pk	34.5	-23	11.8	0	-39.7	-27	-12.7	247	130	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**

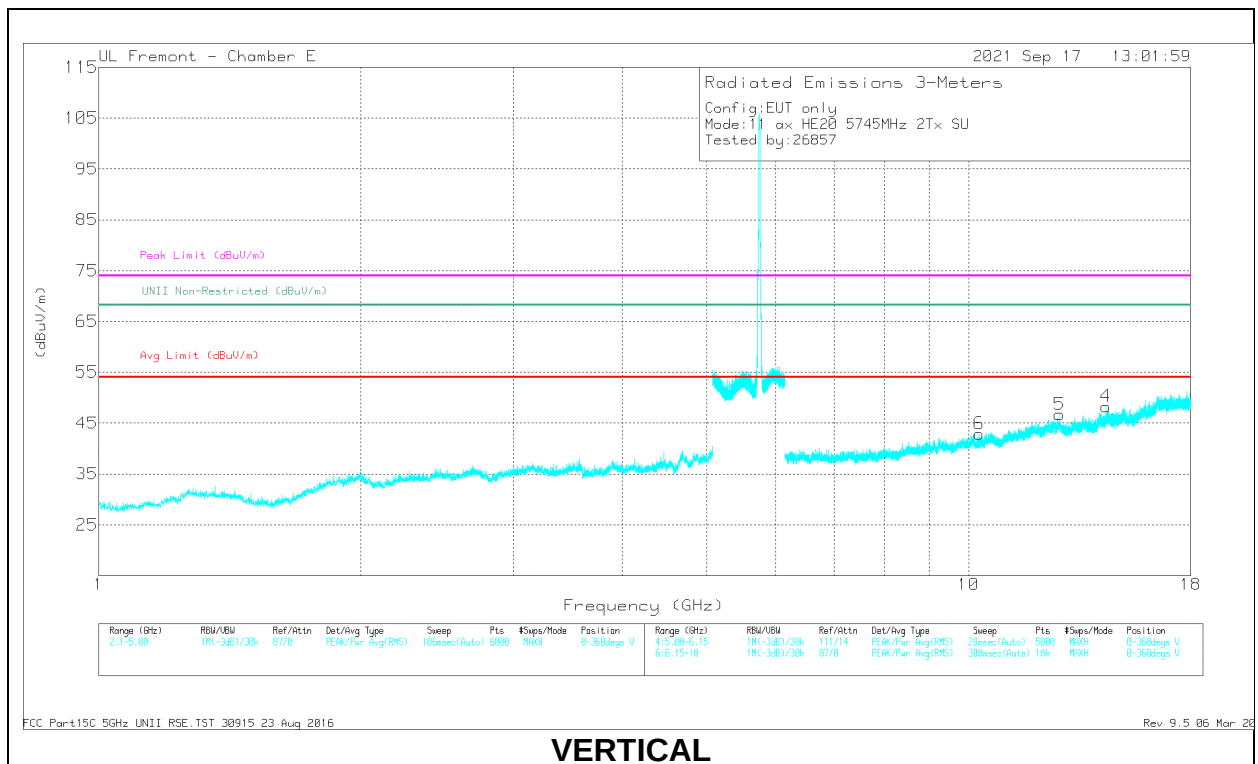
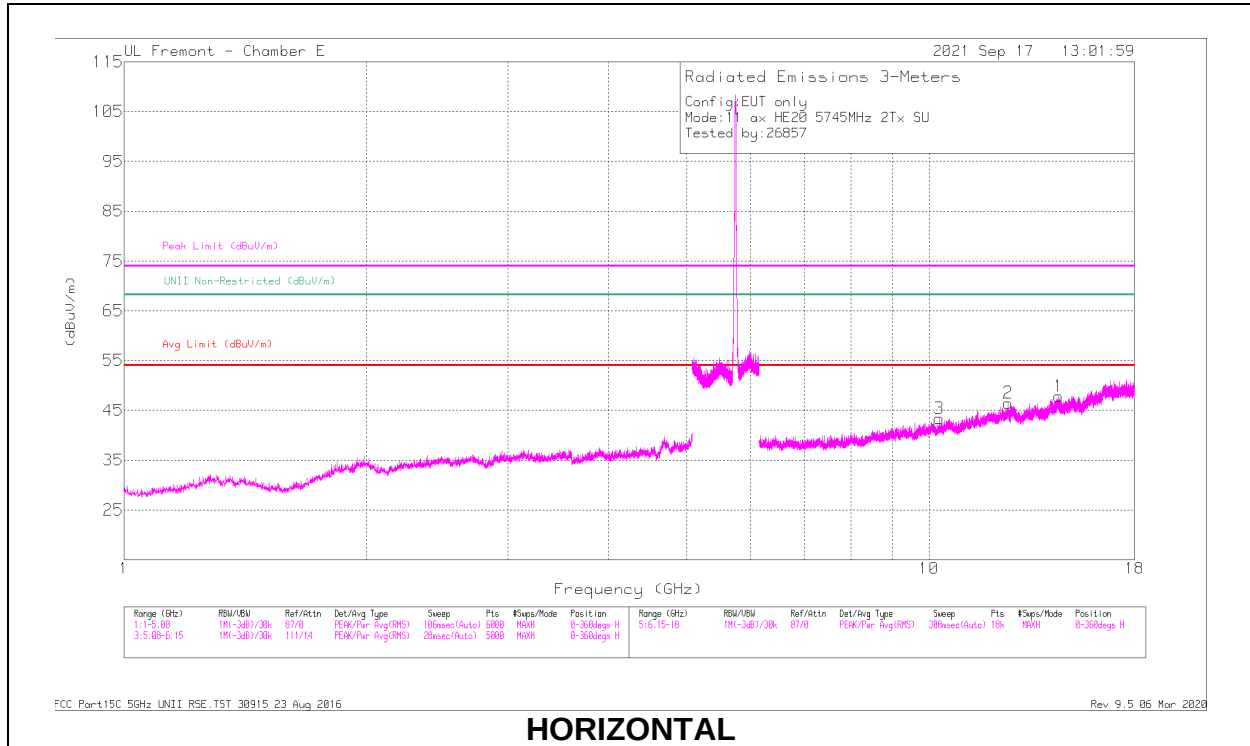
Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-39.66	Pk	35.1	-22.5	11.8	0	-15.26	27	-42.26	181	268	H
2	5980.509	-64.16	Pk	35.1	-22.3	11.8	0	-39.56	-27	-12.56	181	268	H

Pk - Peak detector

VERTICAL RESULT

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-37.33	Pk	35.1	-22.5	11.8	0	-12.93	27	-39.93	264	136	V
2	5982.576	-64.06	Pk	35.1	-22.2	11.8	0	-39.36	-27	-12.36	264	136	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS**LOW CHANNEL RESULTS**

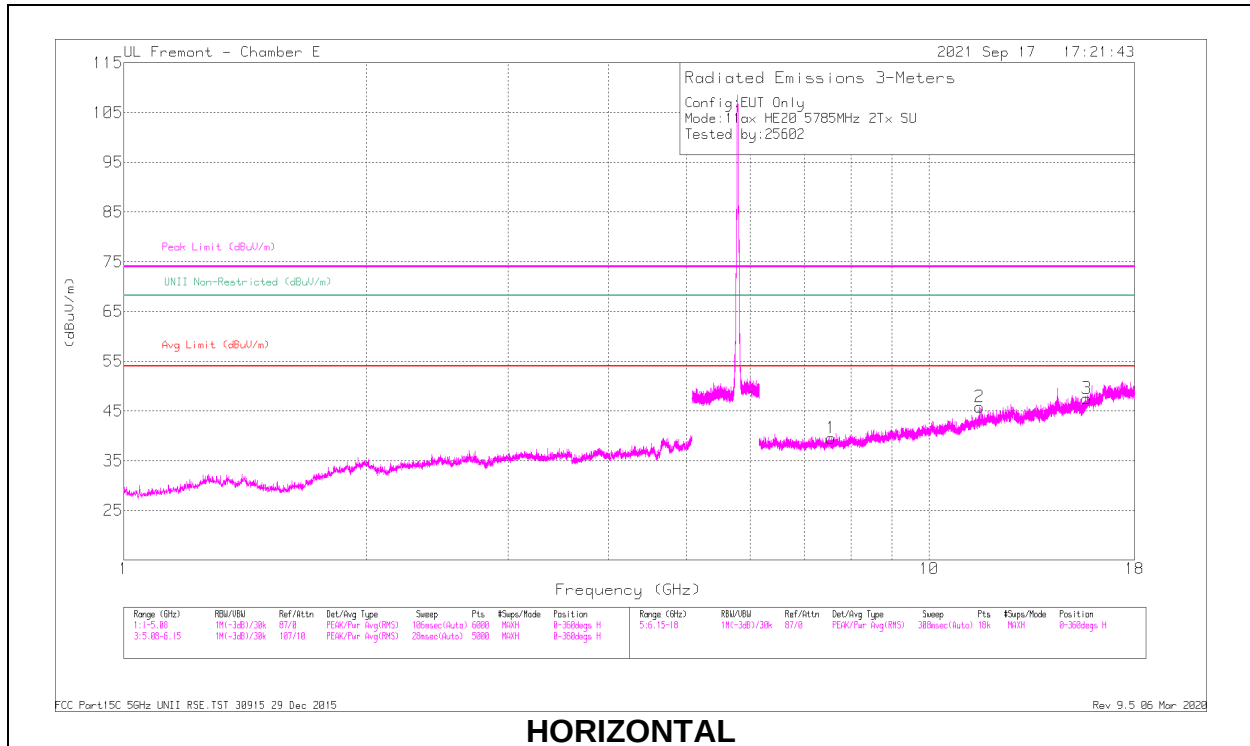
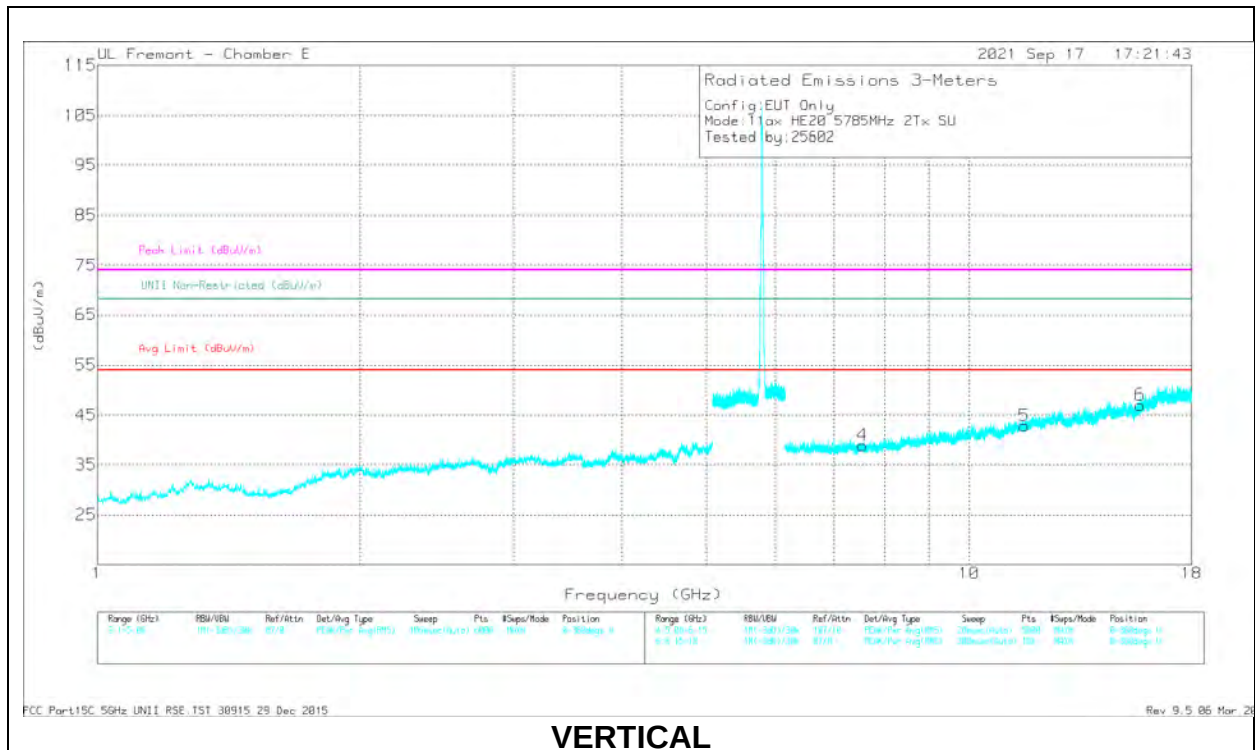
RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF PRE0078107 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 14.48038	35.15	PK-U	39.6	-20.2	54.55	-	-	74	-19.45	-	-	242	317	H
	* 14.48104	20.93	ADR	39.6	-20.2	40.33	54	-13.67	-	-	-	-	242	317	H
2	* 12.53471	34.29	PK-U	39.2	-20.5	52.99	-	-	74	-21.01	-	-	270	359	H
	* 12.53302	20.8	ADR	39.2	-20.4	39.6	54	-14.4	-	-	-	-	270	359	H
6	10.28098	36.4	PK-U	37.4	-24.8	49	-	-	-	-	68.2	-19.2	56	115	V
3	10.29414	36.79	PK-U	37.4	-24.8	49.39	-	-	-	-	68.2	-18.81	239	142	H
5	12.72213	35.29	PK-U	39.3	-21.3	53.29	-	-	-	-	68.2	-14.91	358	159	V
4	14.39003	35.31	PK-U	39.5	-20.3	54.51	-	-	-	-	68.2	-13.69	99	140	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS**HORIZONTAL****VERTICAL**

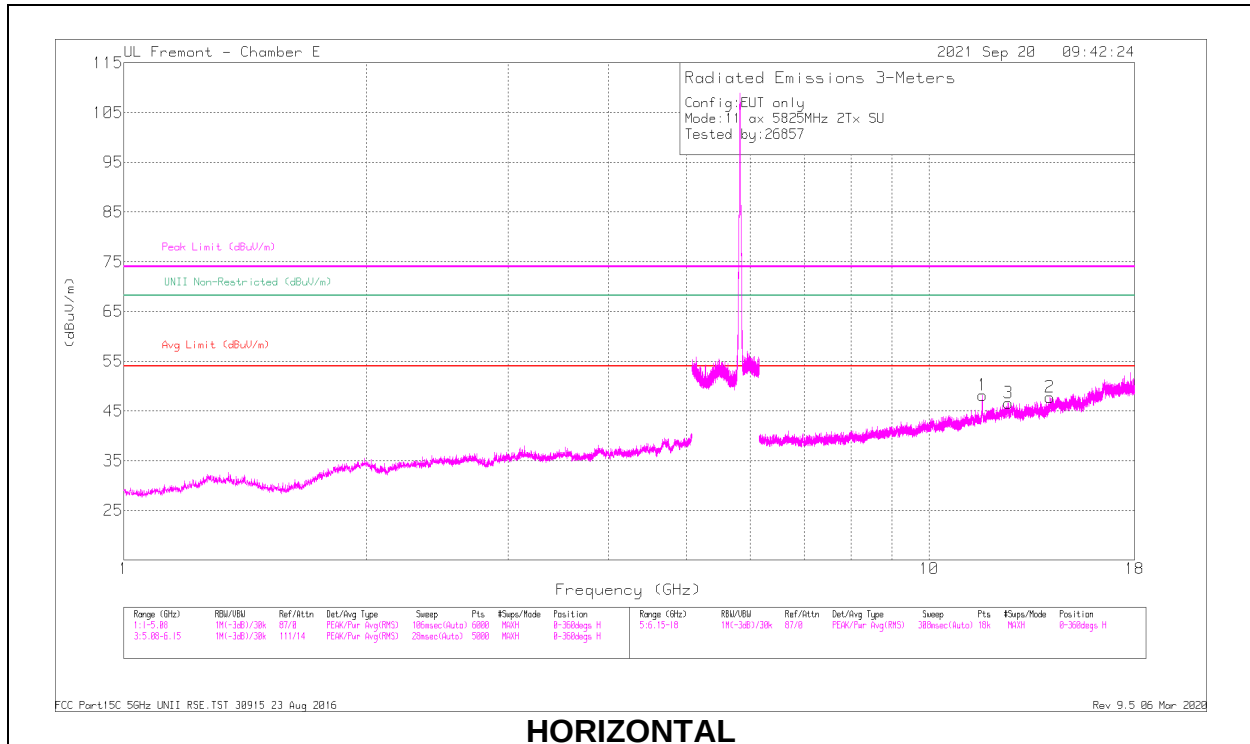
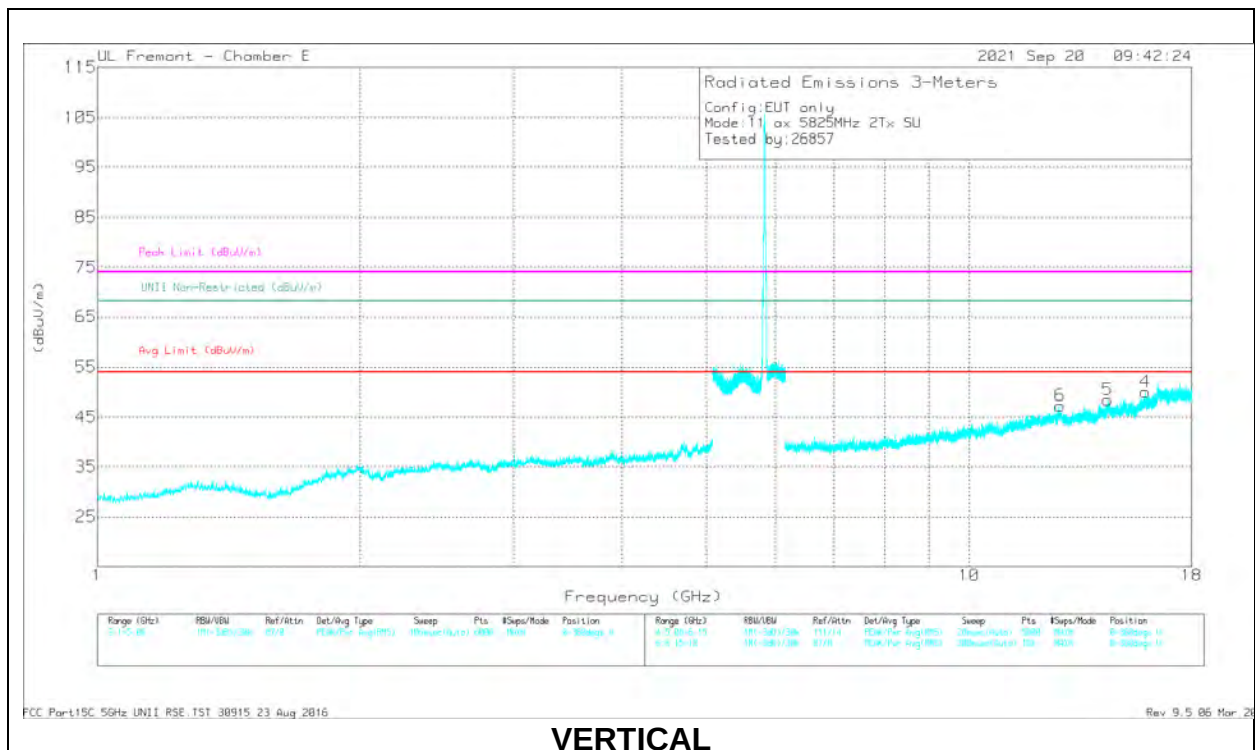
RADIATED EMISSIONS

Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF PRE0078107 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 7.56177	37.73	PK-U	35.7	-26.9	46.53	-	-	74	-27.47	0	101	H
	* 7.56365	25.51	ADR	35.7	-27	34.21	54	-19.79	-	-	0	101	H
2	* 11.56491	36.66	PK-U	38.3	-22.8	52.16	-	-	74	-21.84	356	198	H
	* 11.5662	24.2	ADR	38.3	-22.7	39.8	54	-14.2	-	-	356	198	H
3	* 15.69985	34.79	PK-U	40.5	-20.6	54.69	-	-	74	-19.31	356	101	H
	* 15.70285	21.89	ADR	40.5	-20.6	41.79	54	-12.21	-	-	356	101	H
4	* 7.54608	37.49	PK-U	35.7	-26.7	46.49	-	-	74	-27.51	356	200	V
	* 7.54606	25.33	ADR	35.7	-26.7	34.33	54	-19.67	-	-	356	200	V
5	* 11.56508	35.54	PK-U	38.3	-22.8	51.04	-	-	74	-22.96	356	101	V
	* 11.56718	22.93	ADR	38.3	-22.7	38.53	54	-15.47	-	-	356	101	V
6	* 15.71698	34.61	PK-U	40.4	-20.6	54.41	-	-	74	-19.59	356	200	V
	* 15.71675	21.79	ADR	40.4	-20.6	41.59	54	-12.41	-	-	356	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS**HORIZONTAL****VERTICAL**

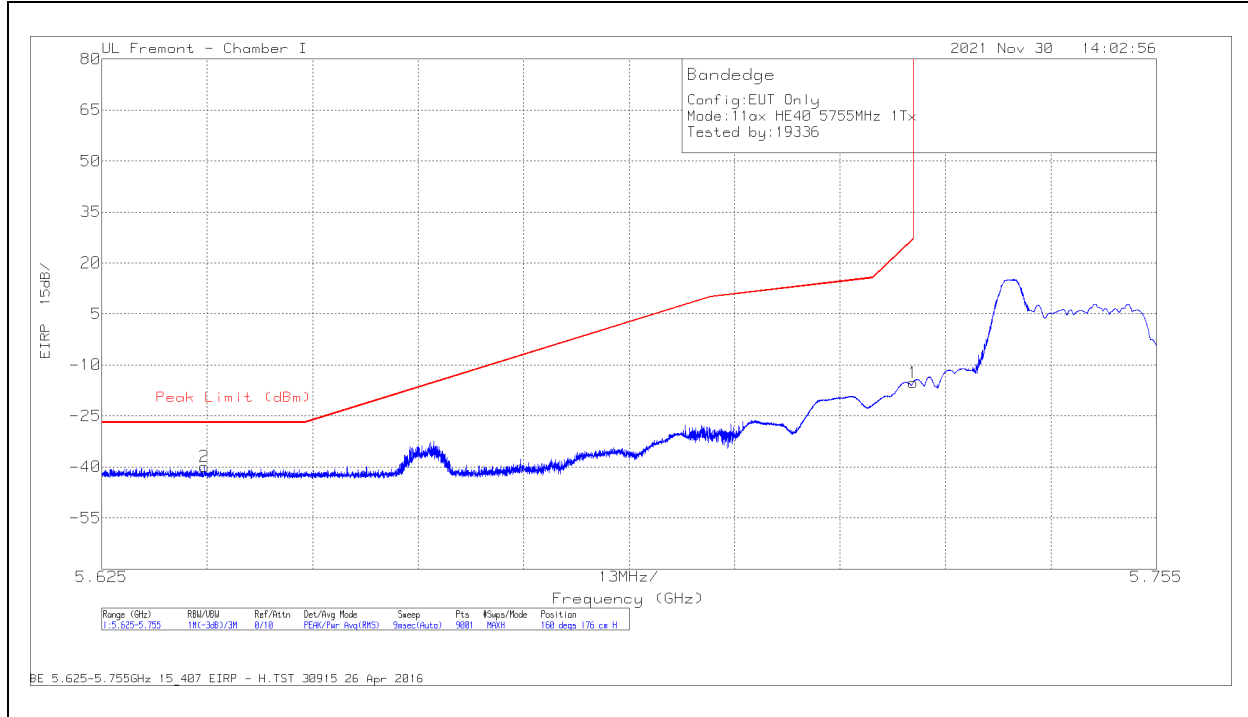
RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF PRE0078107 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 11.64443	38.67	PK-U	38.4	-21.6	55.47	-	-	74	-18.53	-	-	48	203	H
	* 11.64672	26.44	ADR	38.4	-21.6	43.24	54	-10.76	-	-	-	-	48	203	H
3	* 12.55069	34.78	PK-U	39.2	-21	52.98	-	-	74	-21.02	-	-	351	162	H
	* 12.55144	21.55	ADR	39.2	-21	39.75	54	-14.25	-	-	-	-	351	162	H
4	* 15.93878	34.98	PK-U	40.9	-19.1	56.78	-	-	74	-17.22	-	-	211	134	V
	* 15.9387	21.28	ADR	40.9	-19.1	43.08	54	-10.92	-	-	-	-	211	134	V
6	12.7312	35.86	PK-U	39.3	-21.4	53.76	-	-	-	-	68.2	-14.44	206	101	V
2	14.13574	35.74	PK-U	39	-19.8	54.94	-	-	-	-	68.2	-13.26	69	203	H
5	14.4342	35.64	PK-U	39.6	-19.8	55.44	-	-	-	-	68.2	-12.76	172	179	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

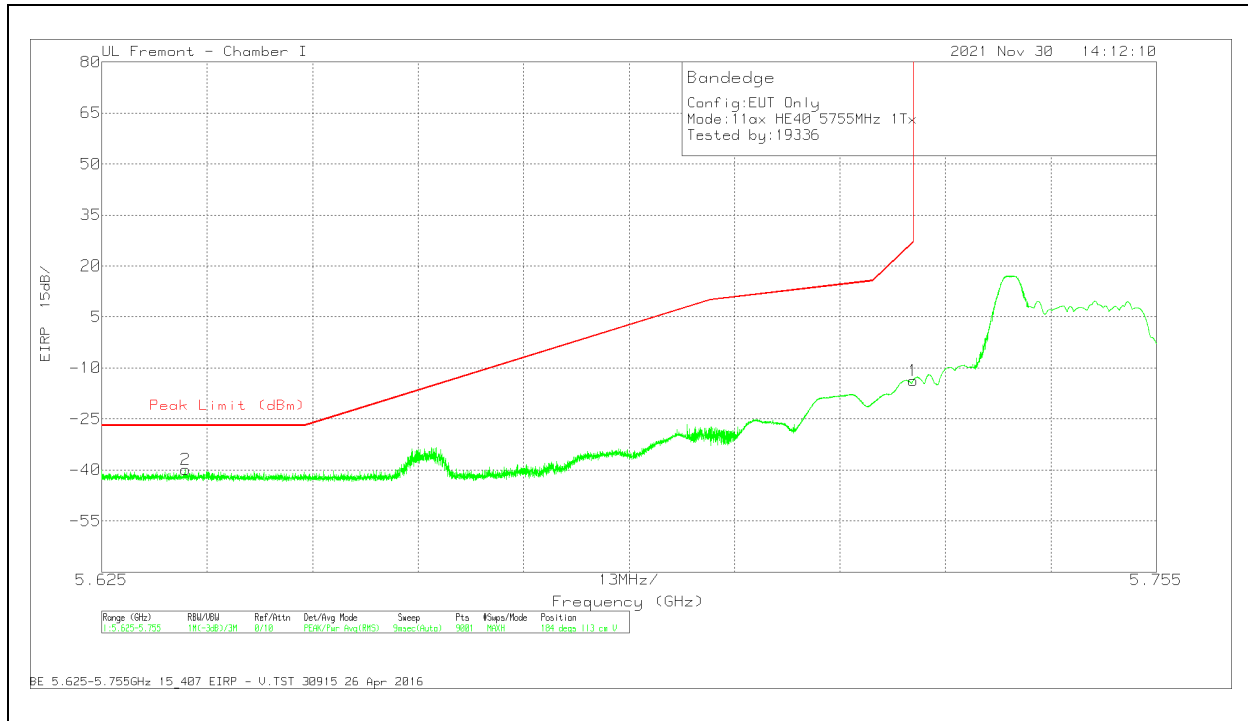
PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.23. TX ABOVE 1 GHz 802.11ax HE40 MODE IN THE 5.8GHz BAND**1TX Antenna 6 MODE: 26-Tones, RU Index 0****BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**

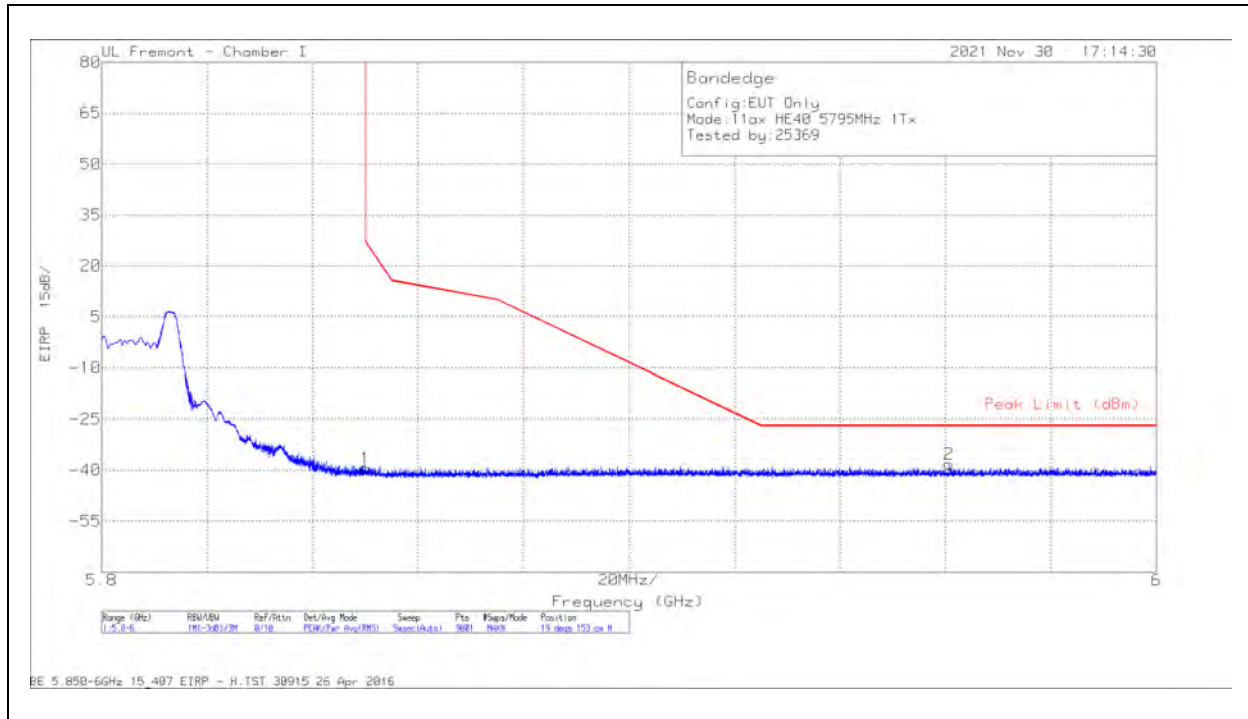
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-45.52	Pk	34.5	-16	11.8	0	-15.22	27	-42.22	160	176	H
2	5.637653	-70.23	Pk	34.4	-15.9	11.8	0	-39.93	-27	-12.93	160	176	H

Pk - Peak detector

VERTICAL RESULT

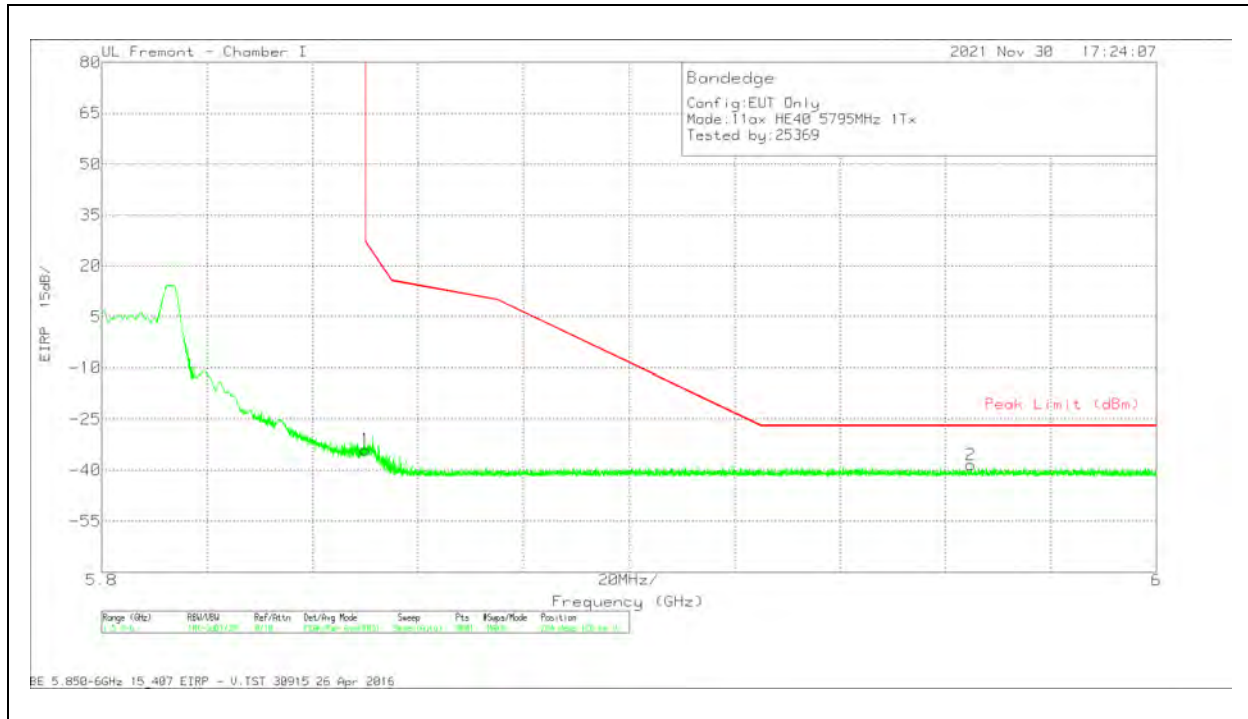
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-44.05	Pk	34.5	-16	11.8	0	-13.75	27	-40.75	184	113	V
2	5.635371	-70.15	Pk	34.4	-15.9	11.8	0	-39.85	-27	-12.85	184	113	V

Pk - Peak detector

1TX Antenna 6 MODE: 26-Tones, RU Index 17**BANDEDGE (HIGH CHANNEL)****HORIZONTAL RESULT**

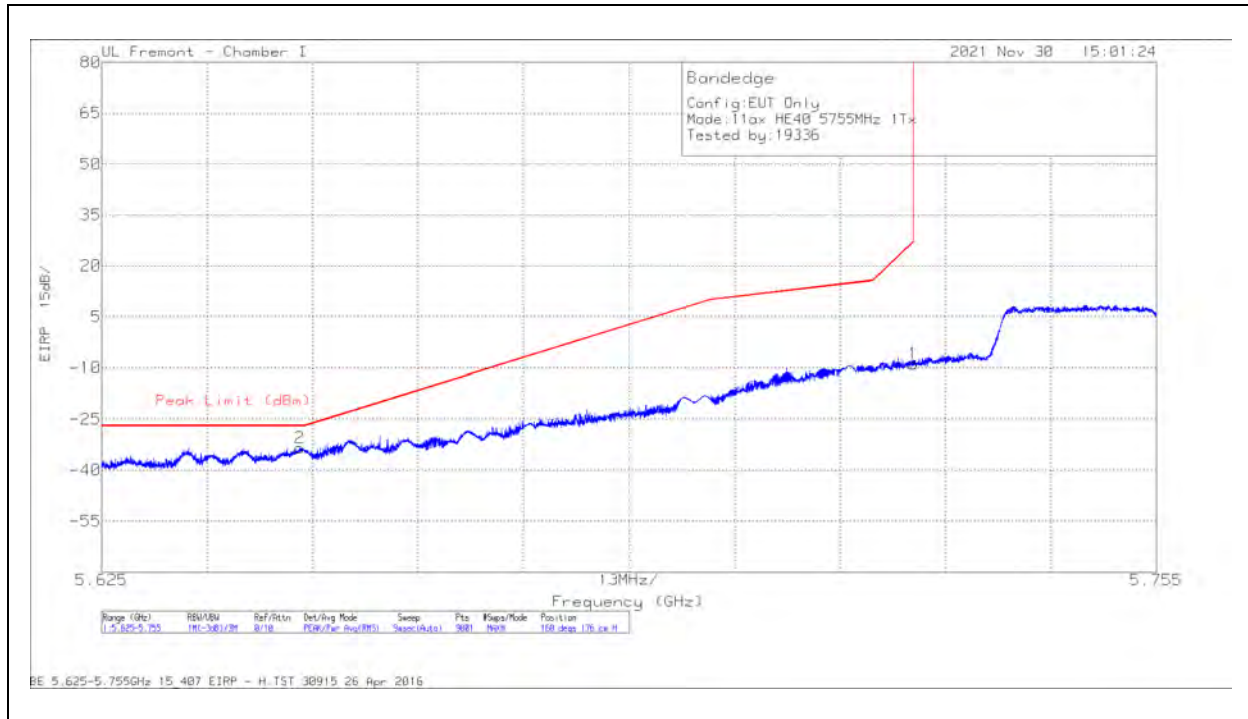
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Filr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-70.94	Pk	34.8	-15.1	11.8	0	-39.44	27	-66.44	19	153	H
2	5.960687	-70.02	Pk	35.1	-15.1	11.8	0	-38.22	-27	-11.22	19	153	H

Pk - Peak detector

VERTICAL RESULT

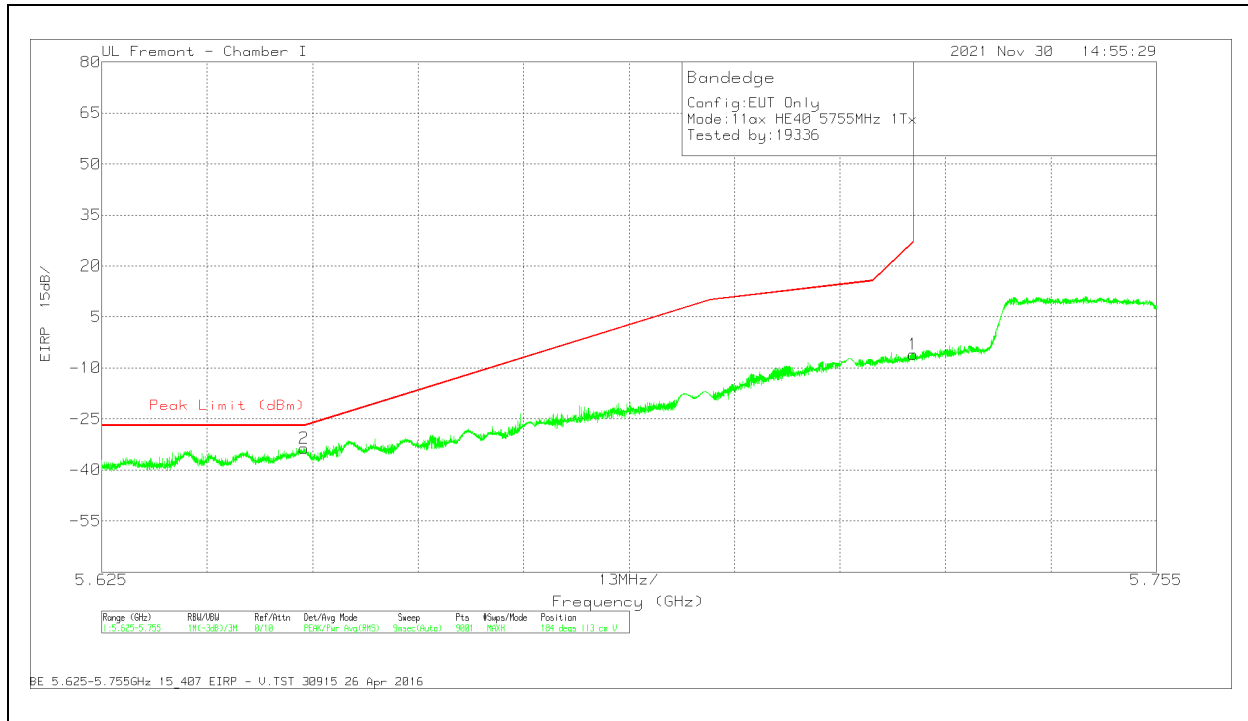
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-65.39	Pk	34.8	-15.1	11.8	0	-33.89	27	-60.89	204	128	V
2	5.964798	-70.22	Pk	35.1	-15.1	11.8	0	-38.42	-27	-11.42	204	128	V

Pk - Peak detector

1TX Antenna 6 MODE: 484-Tones, RU Index 65**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**

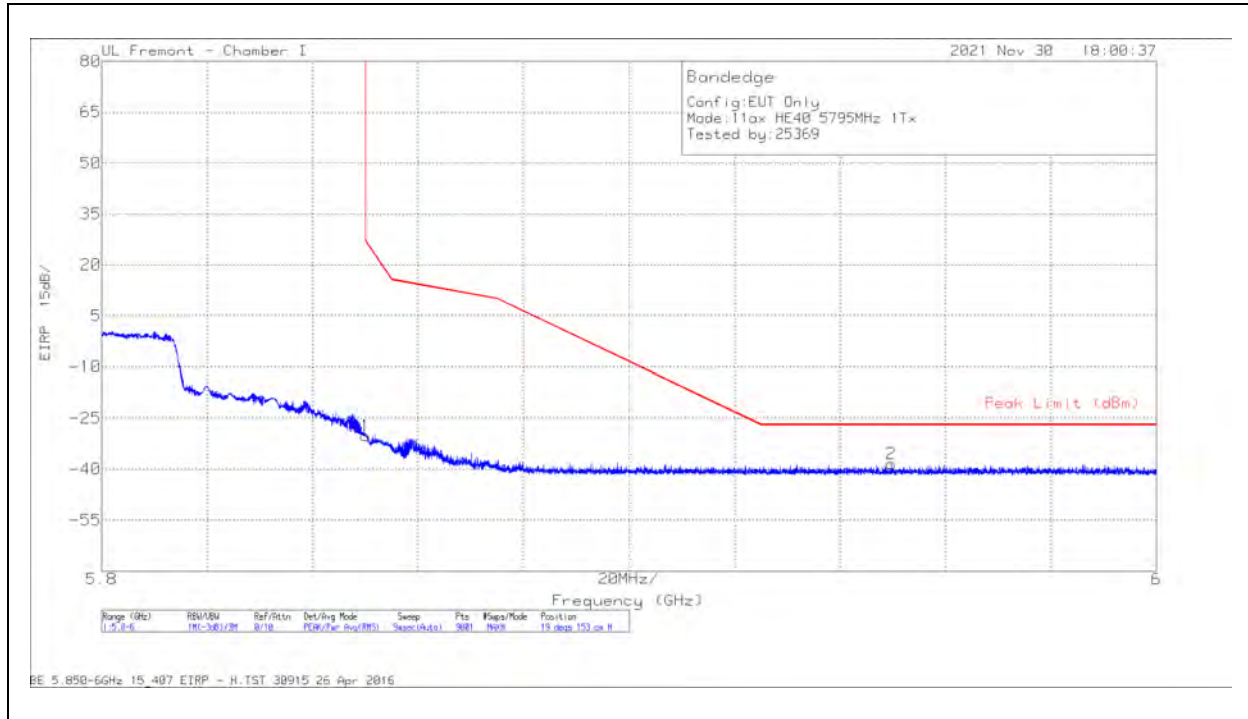
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-39.14	Pk	34.5	-16	11.8	0	-8.84	27	-35.84	160	176	H
2	5.649381	-63.47	Pk	34.4	-16.1	11.8	0	-33.37	-27	-6.37	160	176	H

Pk - Peak detector

VERTICAL RESULT

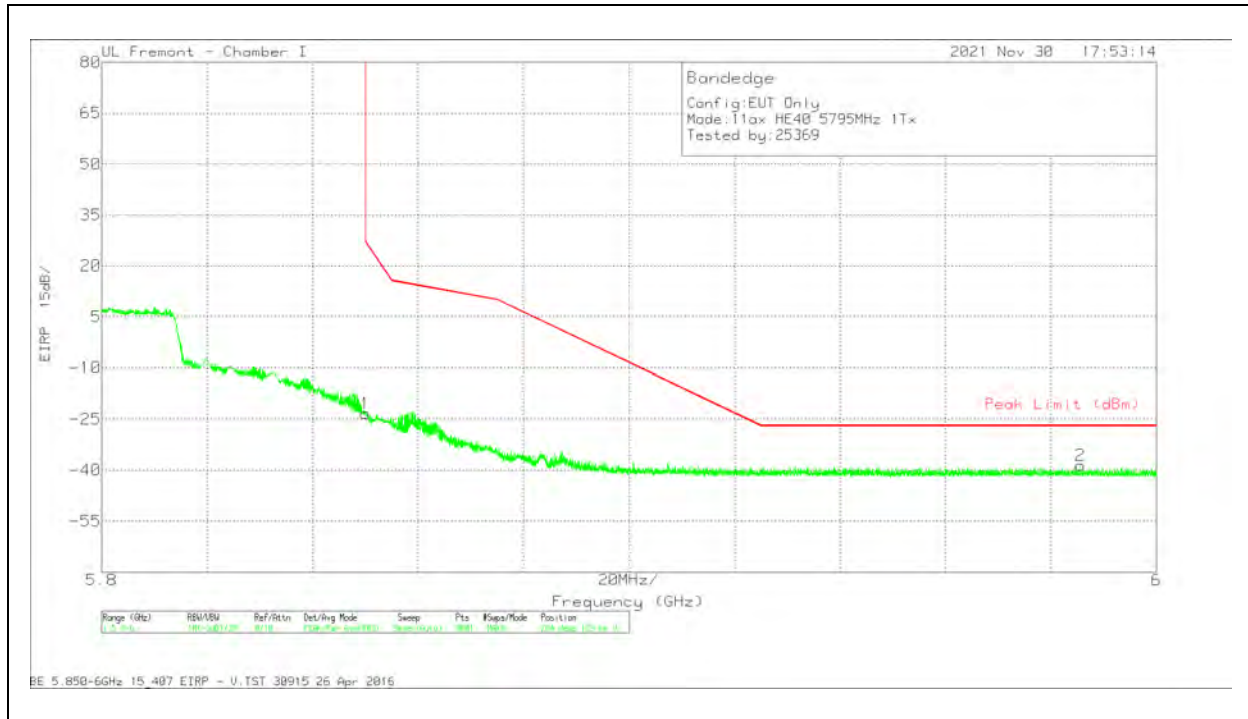
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-36.2	Pk	34.5	-16	11.8	0	-5.9	27	-32.9	184	113	V
2	5.649945	-63.66	Pk	34.4	-16.1	11.8	0	-33.56	-27	-6.56	184	113	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**

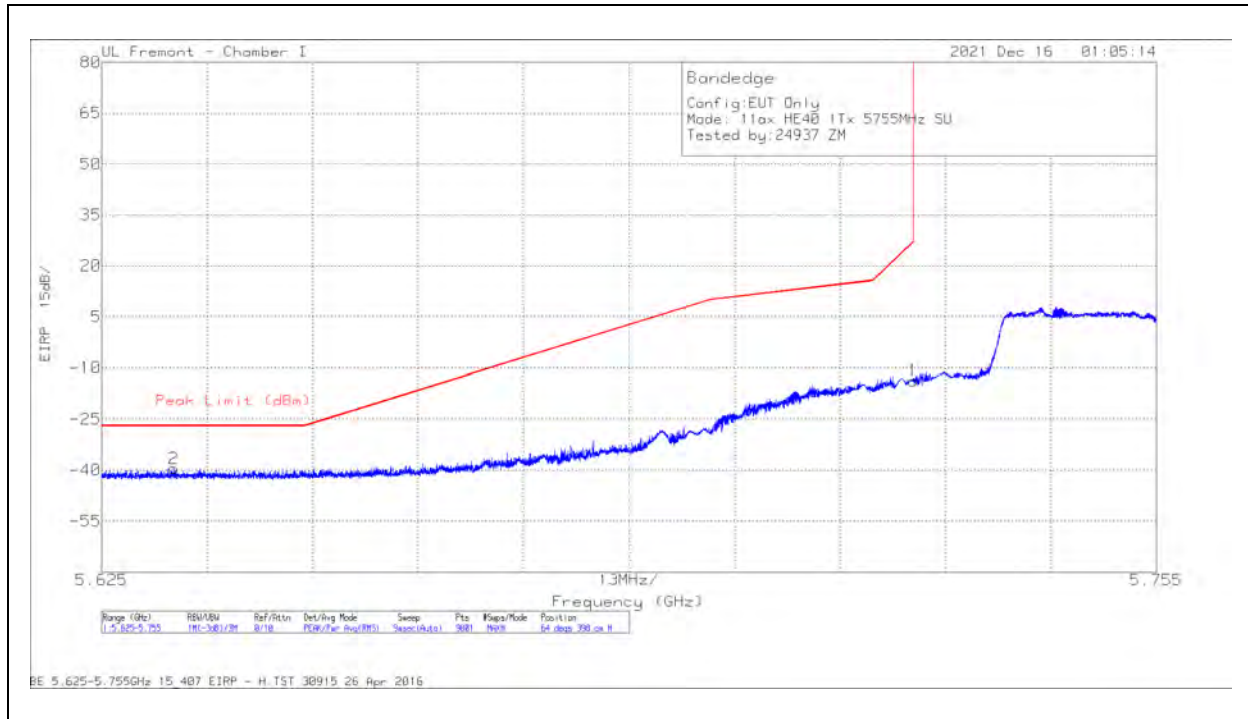
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-61.56	Pk	34.8	-15.1	11.8	0	-30.06	27	-57.06	19	153	H
2	5.94971	-70.34	Pk	35.1	-15	11.8	0	-38.44	-27	-11.44	19	153	H

Pk - Peak detector

VERTICAL RESULT

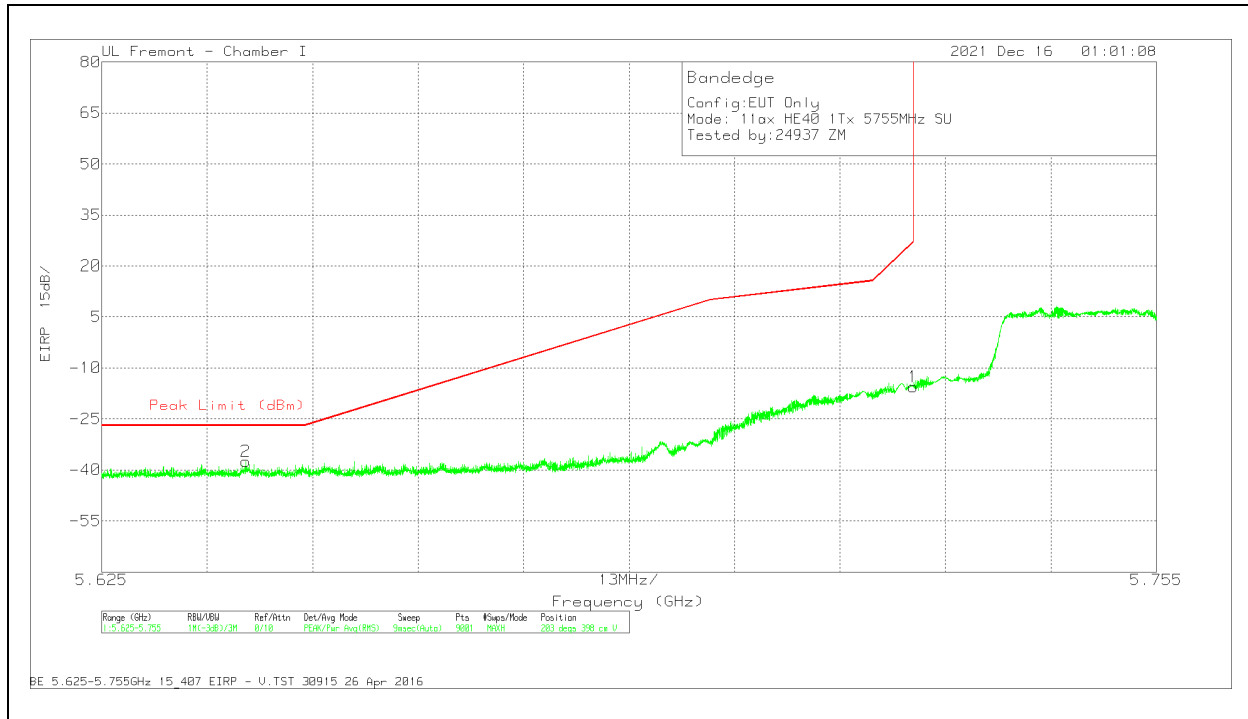
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-54.81	Pk	34.8	-15.1	11.8	0	-23.31	27	-50.31	204	129	V
2	5.98562	-70.45	Pk	35.1	-15.1	11.8	0	-38.65	-27	-11.65	204	129	V

Pk - Peak detector

1TX Antenna 6 MODE: SU, Single User**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**

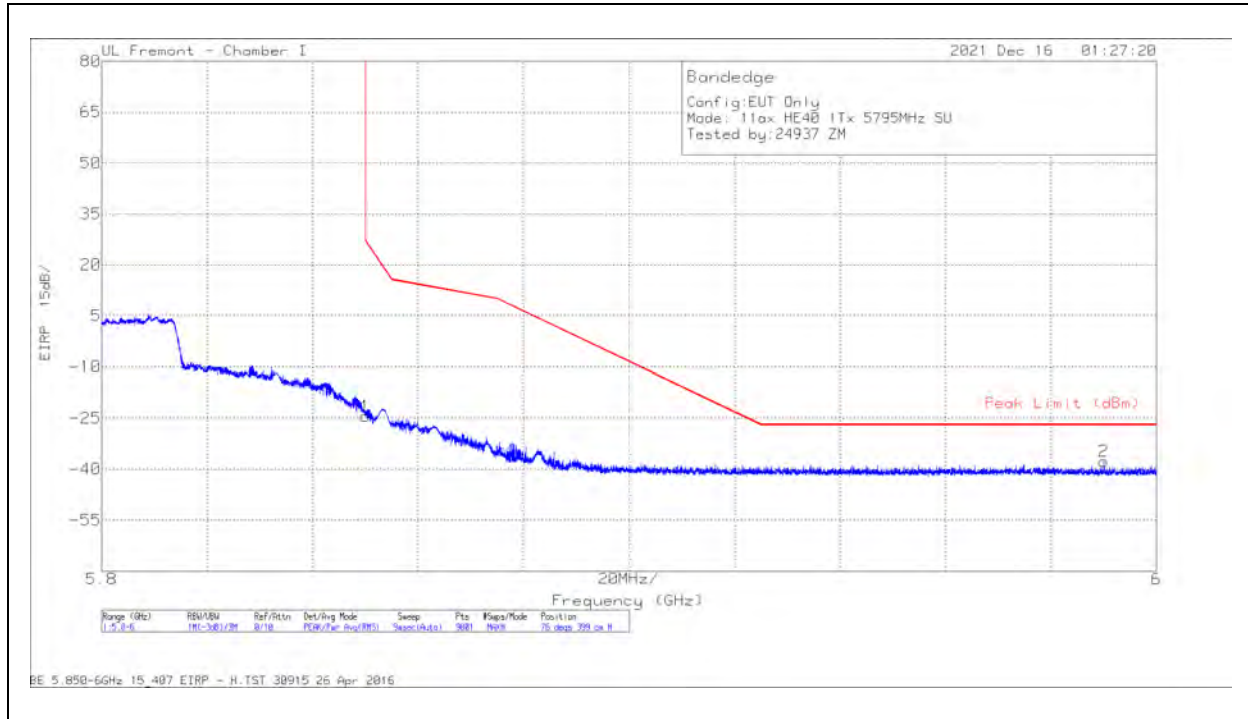
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-44.08	Pk	34.5	-16	11.8	0	-13.78	27	-40.78	64	398	H
2	5.633898	-69.8	Pk	34.4	-15.9	11.8	0	-39.5	-27	-12.5	64	398	H

Pk - Peak detector

VERTICAL RESULT

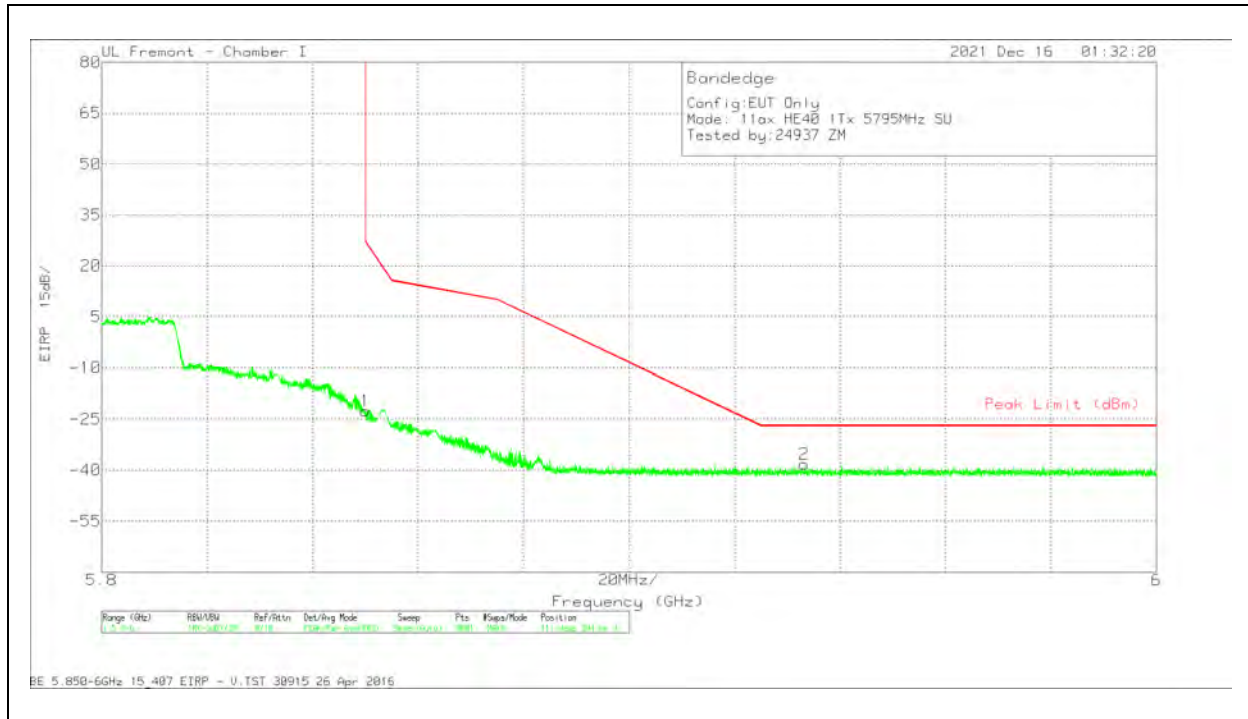
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-45.79	Pk	34.5	-16	11.8	0	-15.49	27	-42.49	203	398	V
2	5.642752	-67.69	Pk	34.4	-16	11.8	0	-37.49	-27	-10.49	203	398	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**

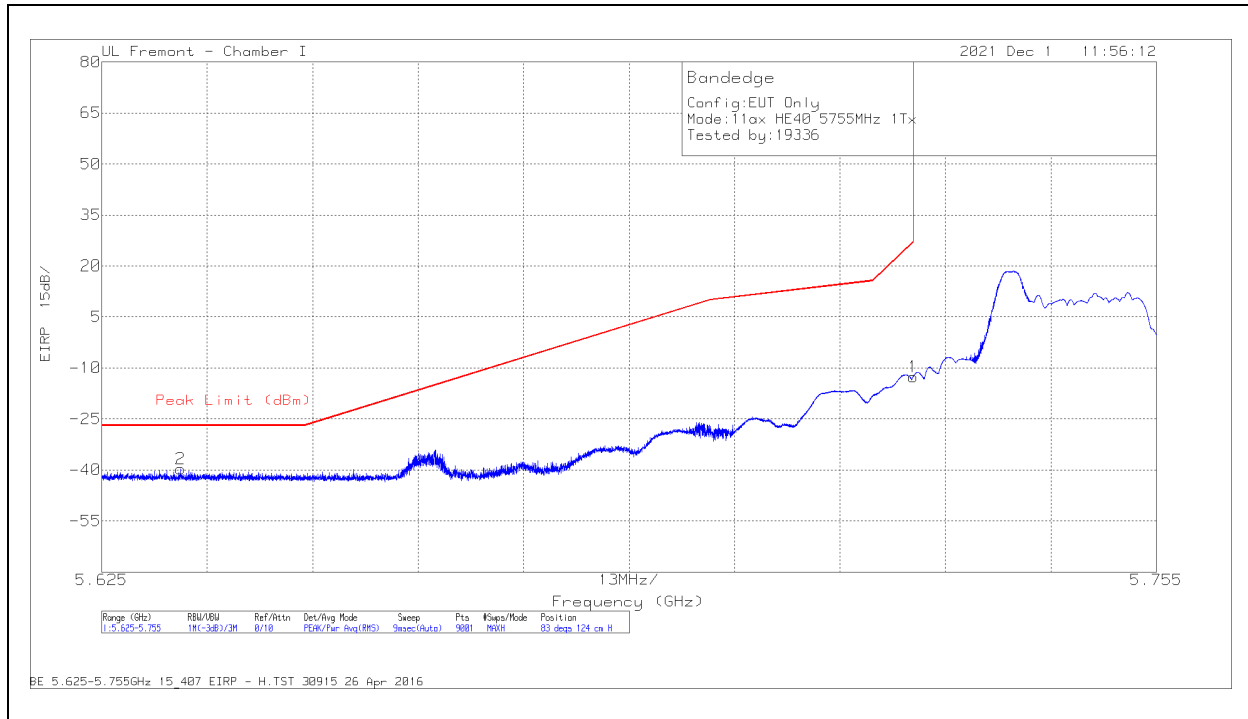
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-55.93	Pk	34.8	-15.1	11.8	0	-24.43	27	-51.43	76	399	H
2	5.989998	-69.51	Pk	35.1	-15.1	11.8	0	-37.71	-27	-10.71	76	399	H

Pk - Peak detector

VERTICAL RESULT

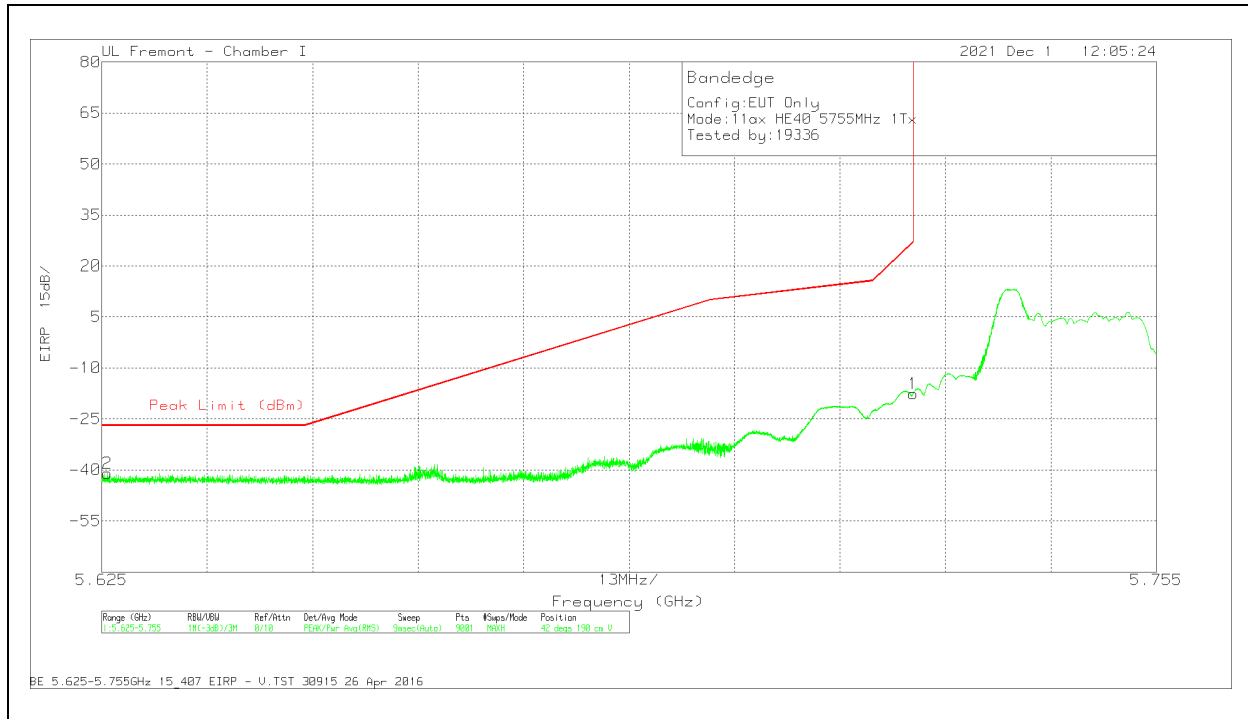
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Filt/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-54.07	Pk	34.8	-15.1	11.8	0	-22.57	27	-49.57	111	394	V
2	5.933199	-70.17	Pk	35	-14.9	11.8	0	-38.27	-27	-11.27	111	394	V

Pk - Peak detector

1TX Antenna 3 MODE: 26-Tones, RU Index 0**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**

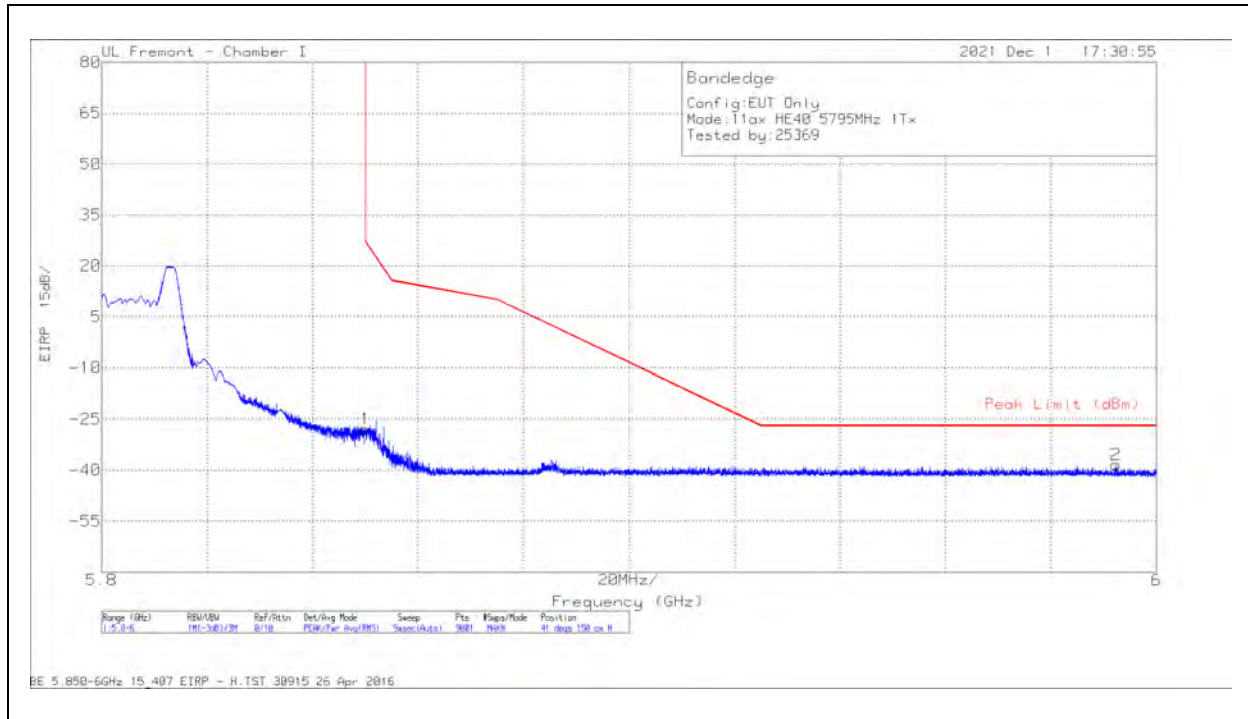
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-42.9	Pk	34.5	-16	11.8	0	-12.6	27	-39.6	83	124	H
2	5.634721	-69.98	Pk	34.4	-15.9	11.8	0	-39.68	-27	-12.68	83	124	H

Pk - Peak detector

VERTICAL RESULT

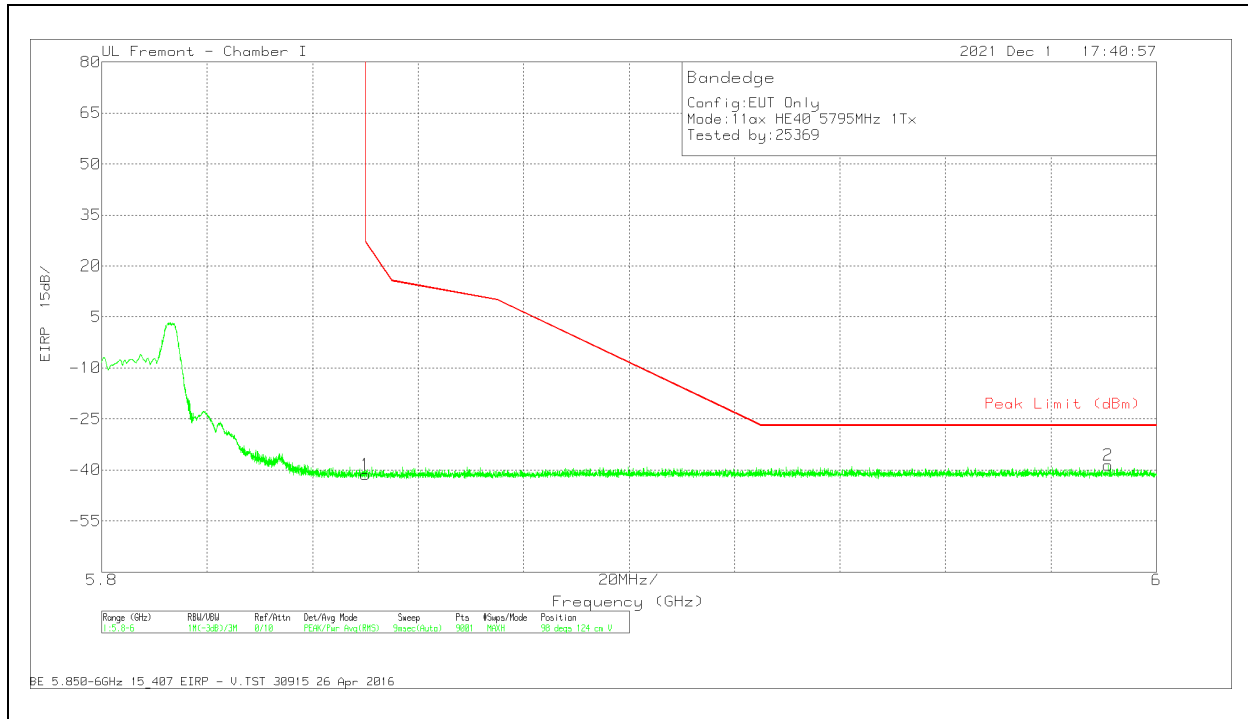
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-47.83	Pk	34.5	-16	11.8	0	-17.53	27	-44.53	42	190	V
2	5.625693	-71.34	Pk	34.4	-15.9	11.8	0	-41.04	-27	-14.04	42	190	V

Pk - Peak detector

1TX Antenna 3 MODE: 26-Tones, RU Index 17**BANDEDGE (HIGH CHANNEL)****HORIZONTAL RESULT**

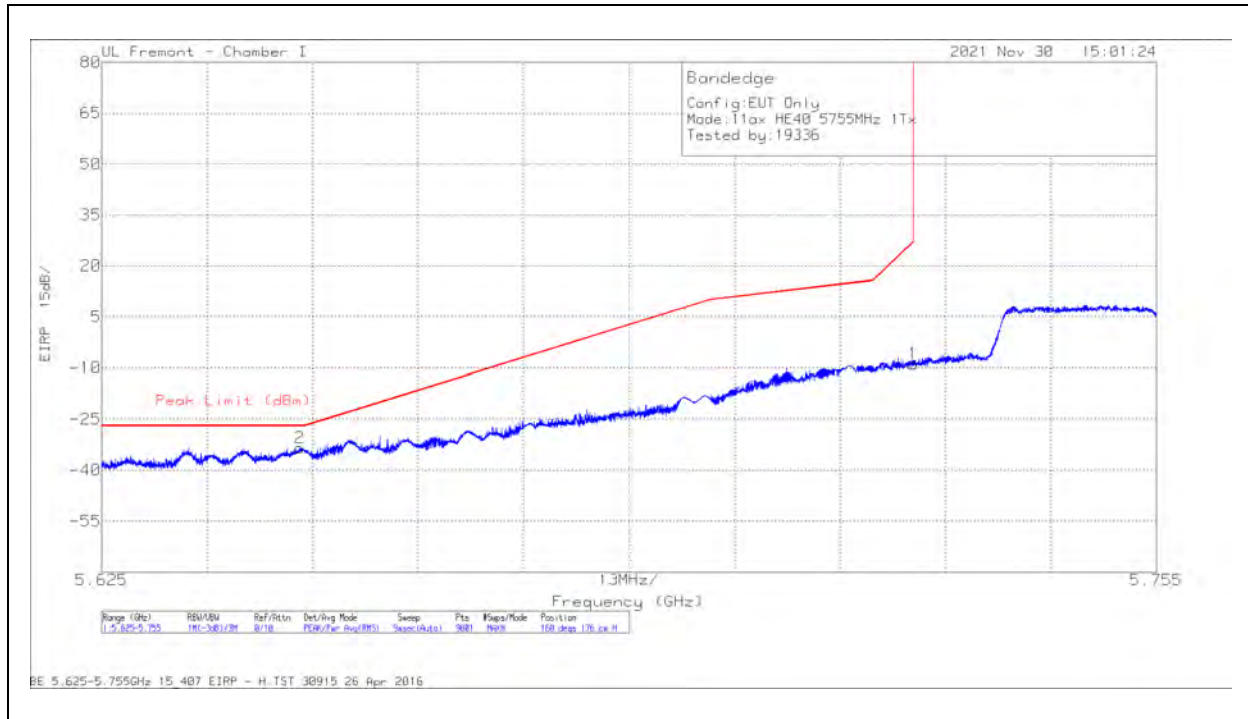
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Filr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-59.42	Pk	34.8	-15.1	11.8	0	-27.92	27	-54.92	41	150	H
2	5.992331	-70.15	Pk	35.1	-15.1	11.8	0	-38.35	-27	-11.35	41	150	H

Pk - Peak detector

VERTICAL RESULT

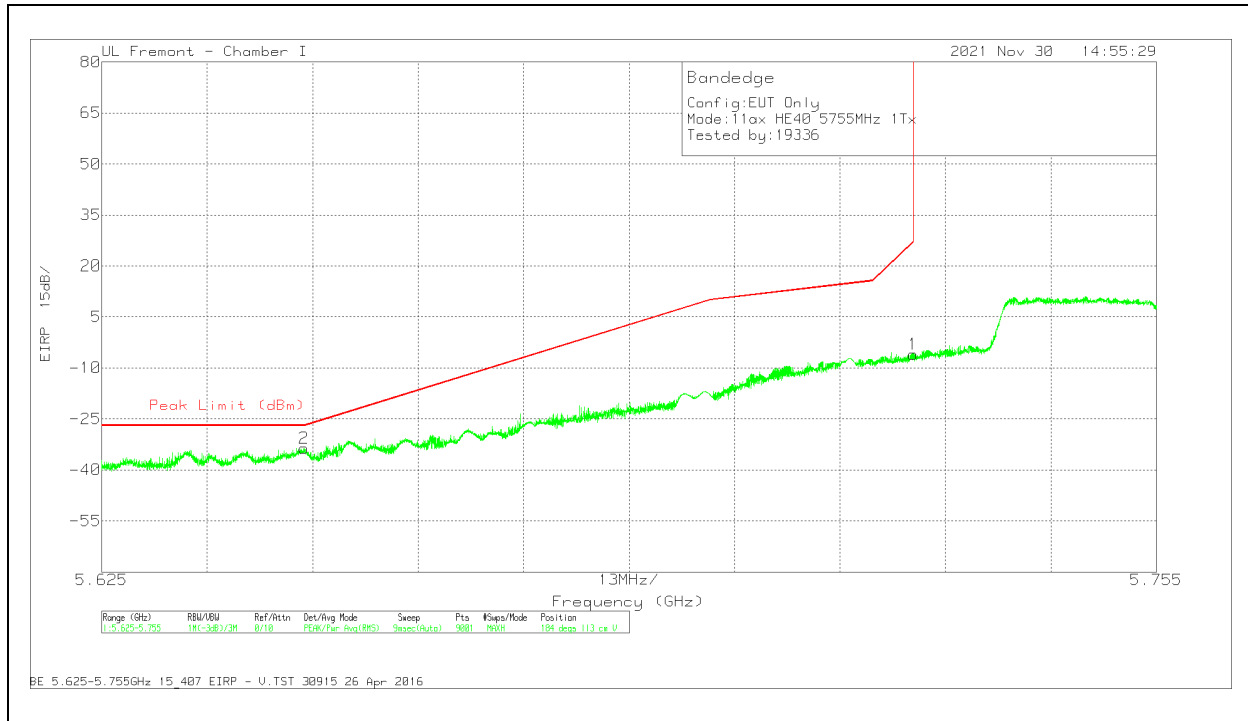
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-72.81	Pk	34.8	-15.1	11.8	0	-41.31	27	-68.31	98	124	V
2	5.990865	-70.35	Pk	35.1	-15.1	11.8	0	-38.55	-27	-11.55	98	124	V

Pk - Peak detector

1TX Antenna 3 MODE: 484-Tones, RU Index 65**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**

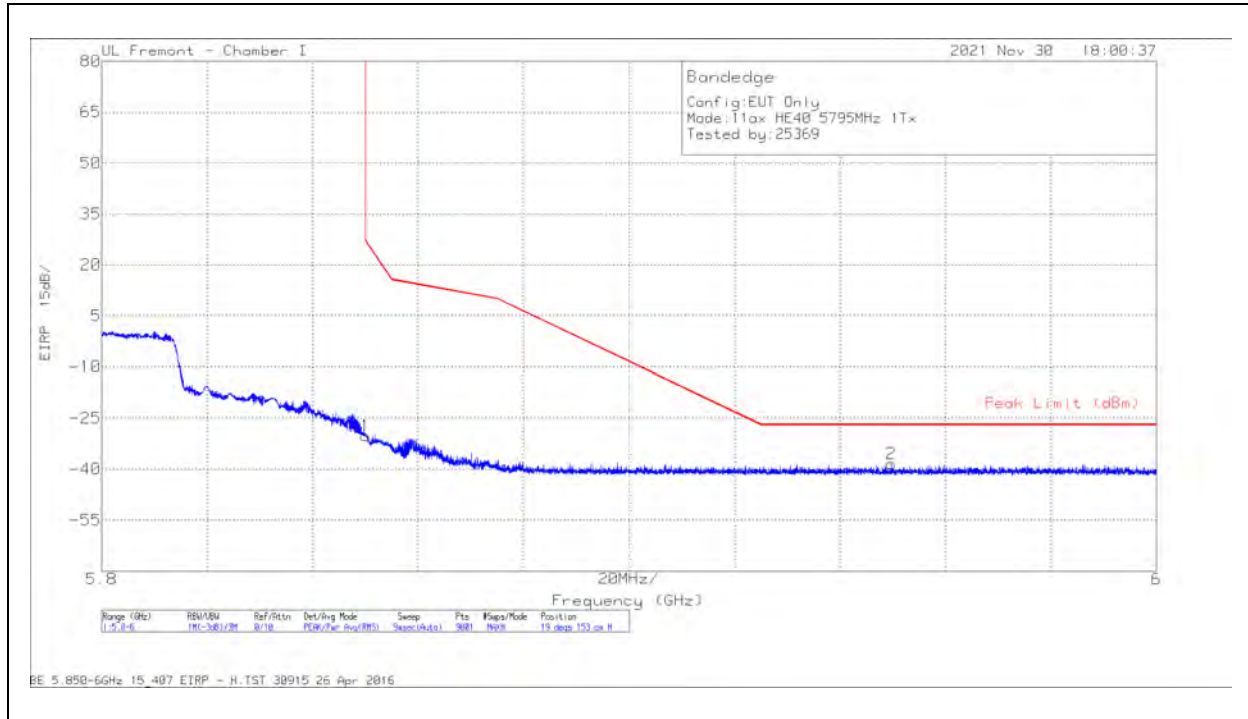
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-39.14	Pk	34.5	-16	11.8	0	-8.84	27	-35.84	160	176	H
2	5.649381	-63.47	Pk	34.4	-16.1	11.8	0	-33.37	-27	-6.37	160	176	H

Pk - Peak detector

VERTICAL RESULT

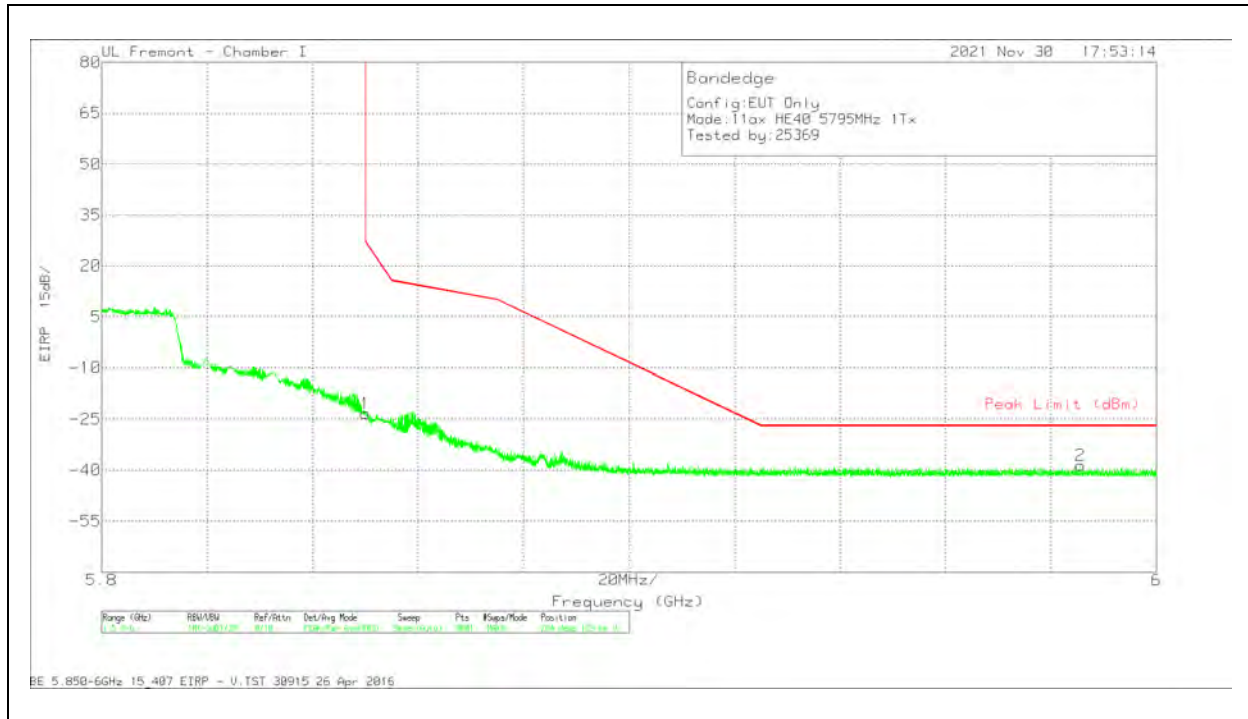
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-36.2	Pk	34.5	-16	11.8	0	-5.9	27	-32.9	184	113	V
2	5.649945	-63.66	Pk	34.4	-16.1	11.8	0	-33.56	-27	-6.56	184	113	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**

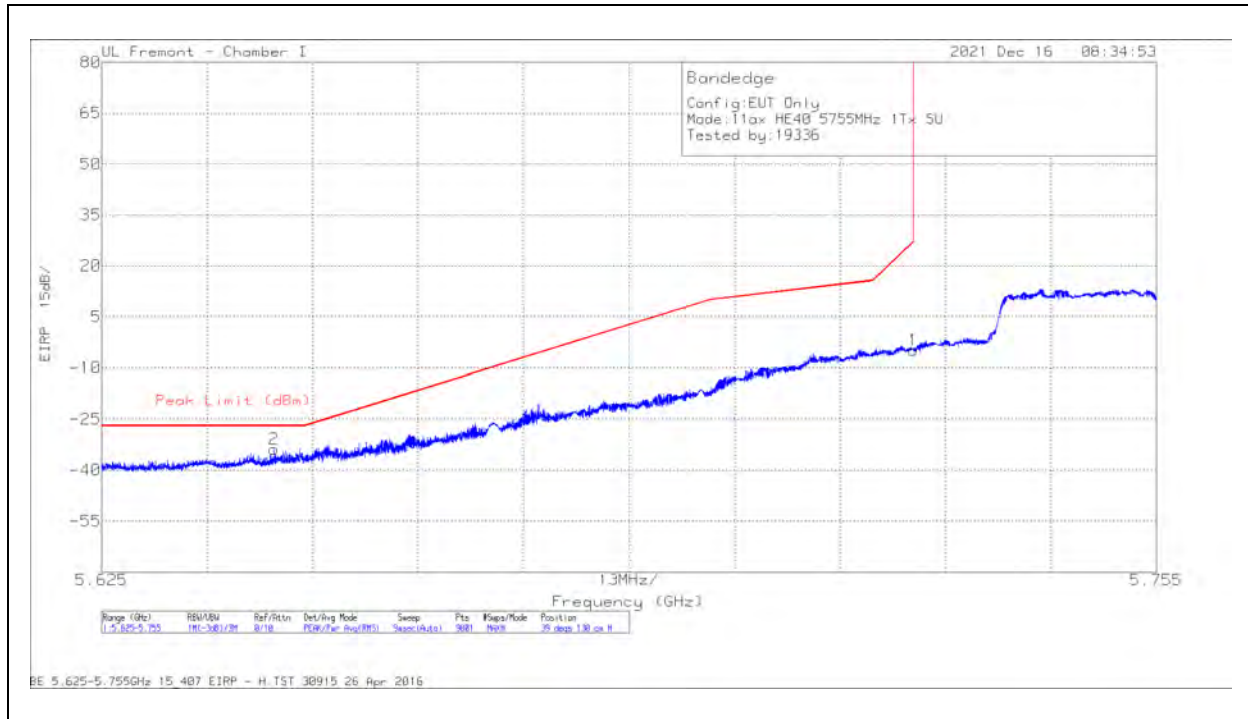
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-61.56	Pk	34.8	-15.1	11.8	0	-30.06	27	-57.06	19	153	H
2	5.94971	-70.34	Pk	35.1	-15	11.8	0	-38.44	-27	-11.44	19	153	H

Pk - Peak detector

VERTICAL RESULT

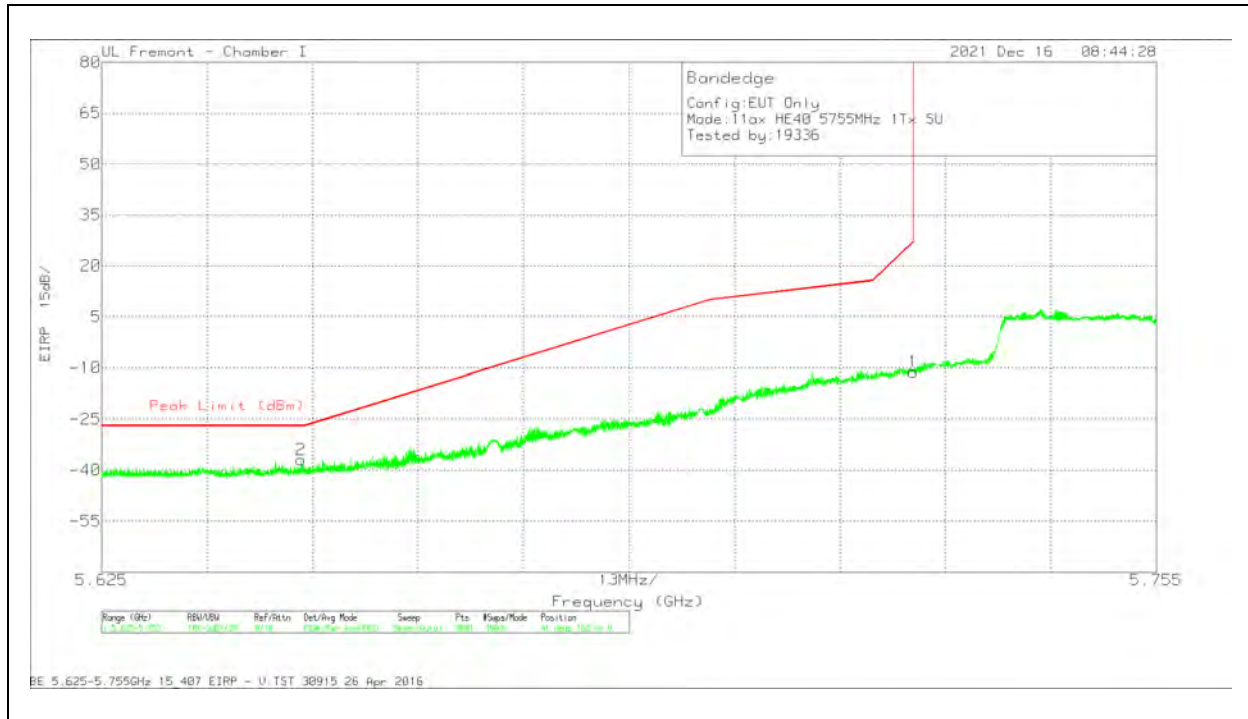
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-54.81	Pk	34.8	-15.1	11.8	0	-23.31	27	-50.31	204	129	V
2	5.98562	-70.45	Pk	35.1	-15.1	11.8	0	-38.65	-27	-11.65	204	129	V

Pk - Peak detector

1TX Antenna 3 MODE: SU, Single User**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**

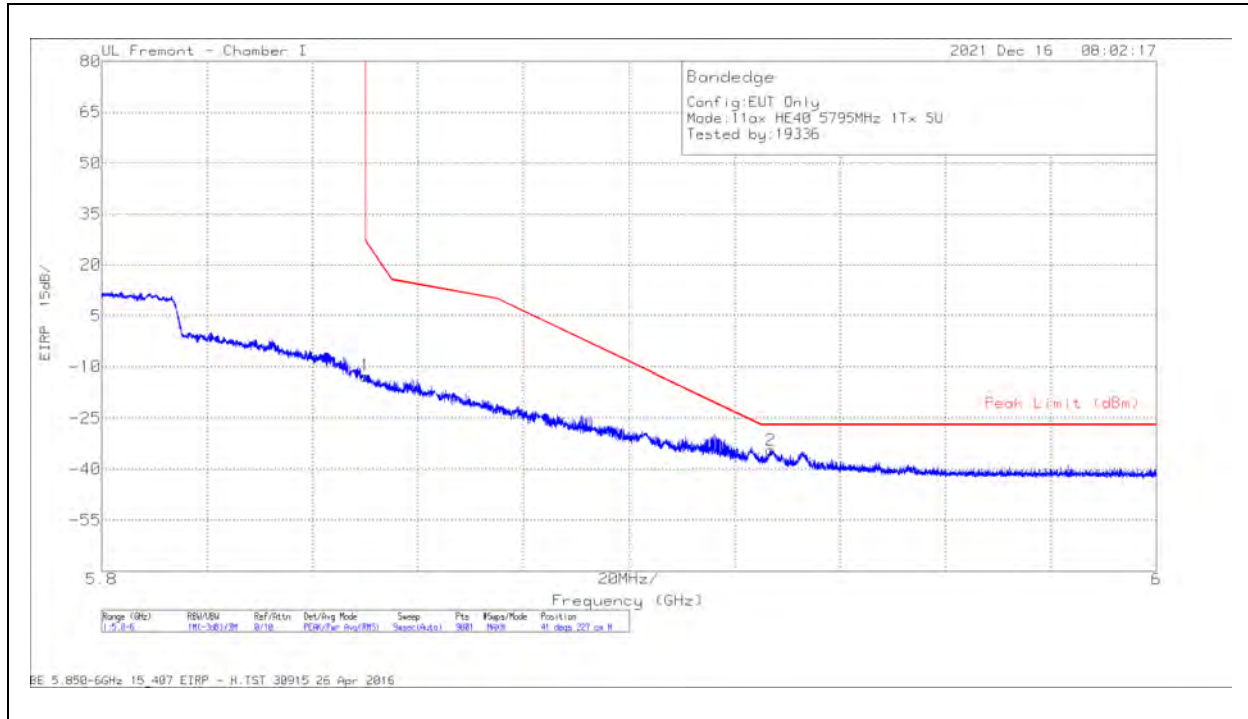
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-35.09	Pk	34.5	-16	11.8	0	-4.79	27	-31.79	39	130	H
2	5.646247	-63.84	Pk	34.4	-16.1	11.8	0	-33.74	-27	-6.74	39	130	H

Pk - Peak detector

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-41.47	Pk	34.5	-16	11.8	0	-11.17	27	-38.17	41	162	V
2	5.649584	-66.96	Pk	34.4	-16.1	11.8	0	-36.86	-27	-9.86	41	162	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-44.02	Pk	34.8	-15.1	11.8	0	-12.52	27	-39.52	41	227	H
2	5.926954	-66.21	Pk	35	-15	11.8	0	-34.41	-27	-7.41	41	227	H

Pk - Peak detector

UL Fremont - Chamber I

2021 Dec 16 08:10:06

Baridedge
Config:EUT Only
Made:11ax HE4B 5795MHz 1Tx SU
Tested by:19336

EIRP 15dB/

Peak Limit (dBm)

20MHz/

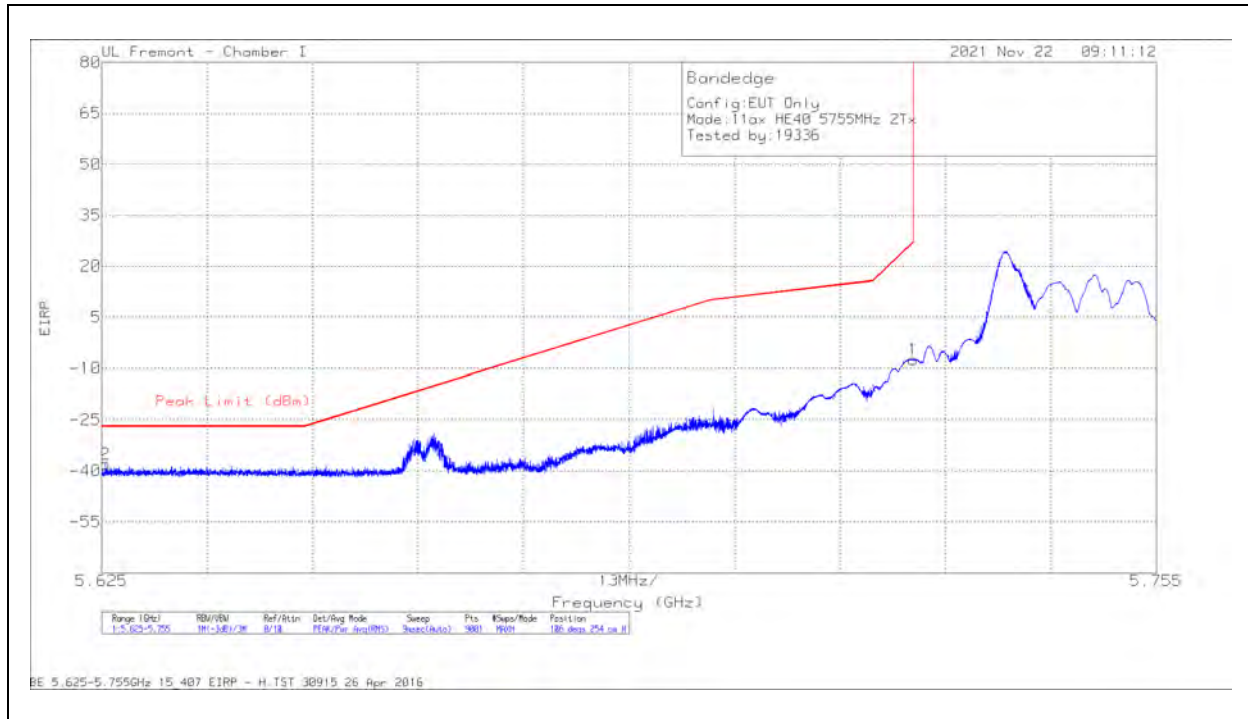
Frequency (GHz)

Range (GHz) 5.8 6
BW/Mod 100kHz/OFDM
Ref/Retn 0dB
Det/Int Mode Pk/40dBm/100Hz
Sweep 100Hz
Pis 100dB
Kappa/Mode 100dB
Position 100dB/100Hz

BE 5.850-6GHz 15.497 EIRP - U.TST 30915 25 Apr 2016

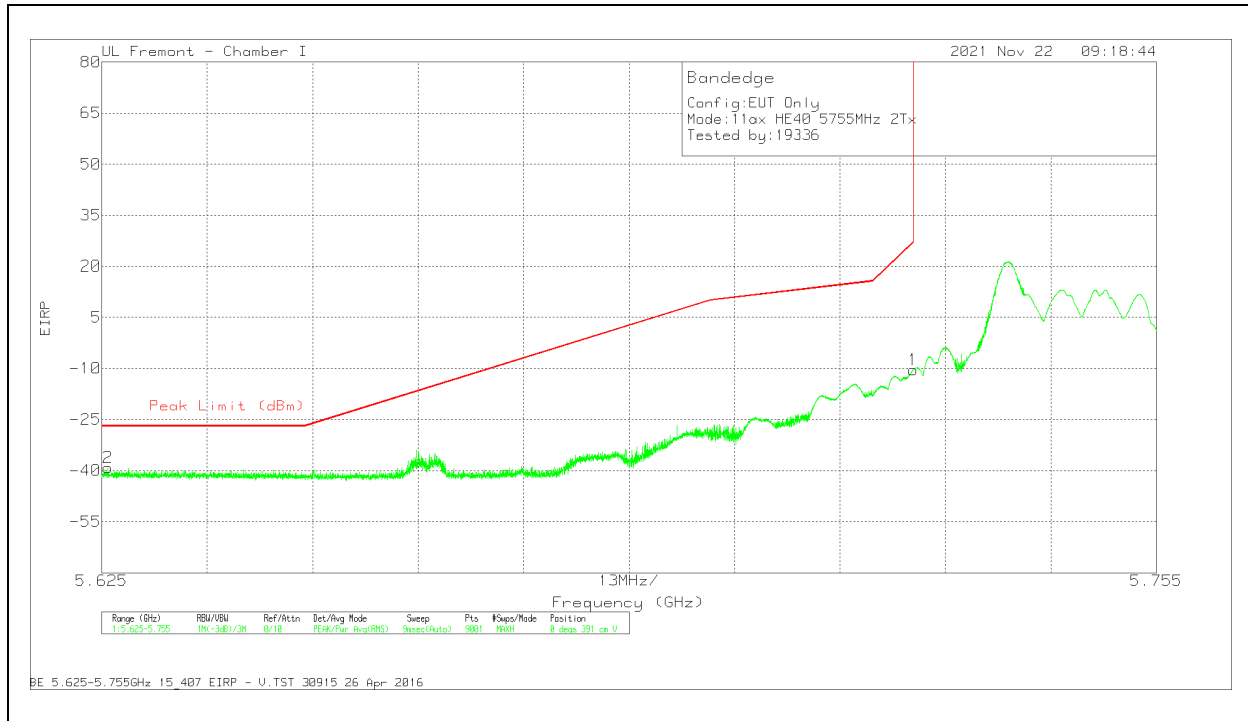
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-51.23	Pk	34.8	-15.1	11.8	0	-19.73	27	-46.73	27	223	V
2	5.92651	-69.19	Pk	35	-15	11.8	0	-37.39	-27	-10.39	27	223	V

Page 527 of 599

2TX Antenna 6 + Antenna 3 OFDMA MODE: 26-Tones, RU Index 0**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**

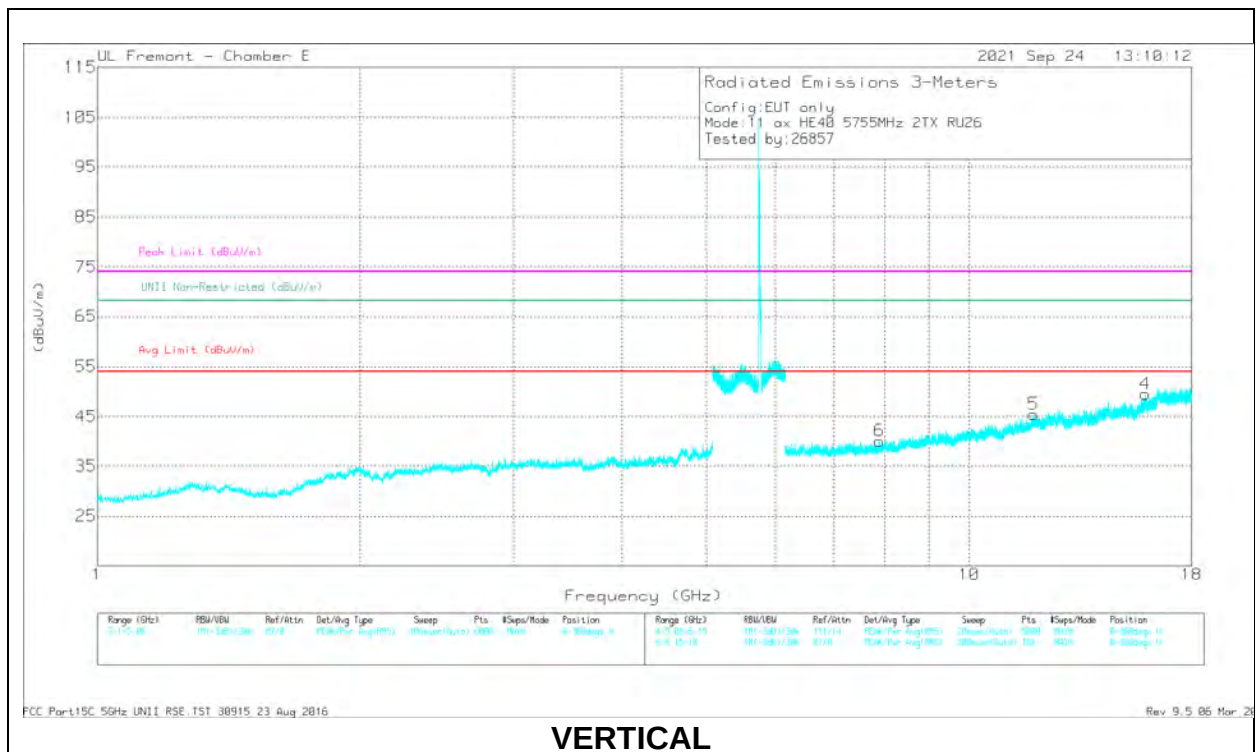
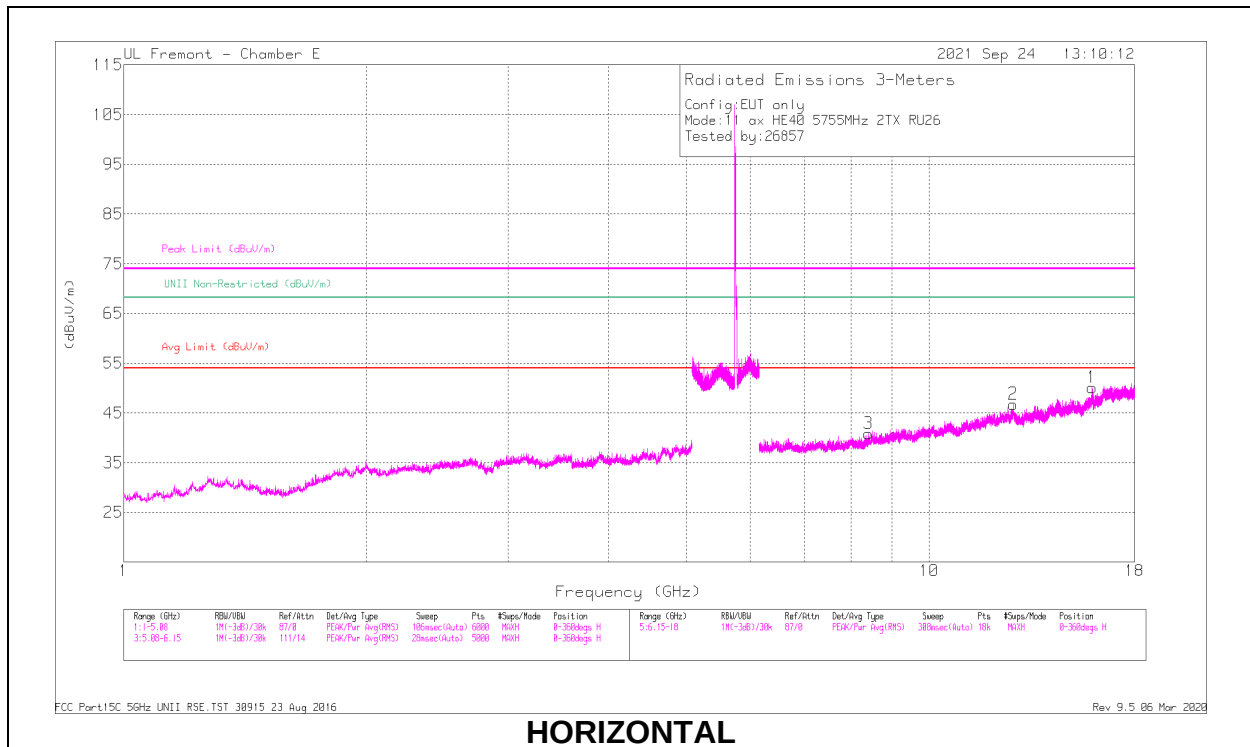
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-37.82	Pk	34.5	-16	11.8	0	-7.52	27	-34.52	106	254	H
2	5.62548	-68.39	Pk	34.4	-15.9	11.8	0	-38.09	-27	-11.09	106	254	H

Pk - Peak detector

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-40.71	Pk	34.5	-16	11.8	0	-10.41	27	-37.41	0	391	V
2	5.62579	-69.44	Pk	34.4	-15.9	11.8	0	-39.14	-27	-12.14	0	391	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS**LOW CHANNEL RESULTS**

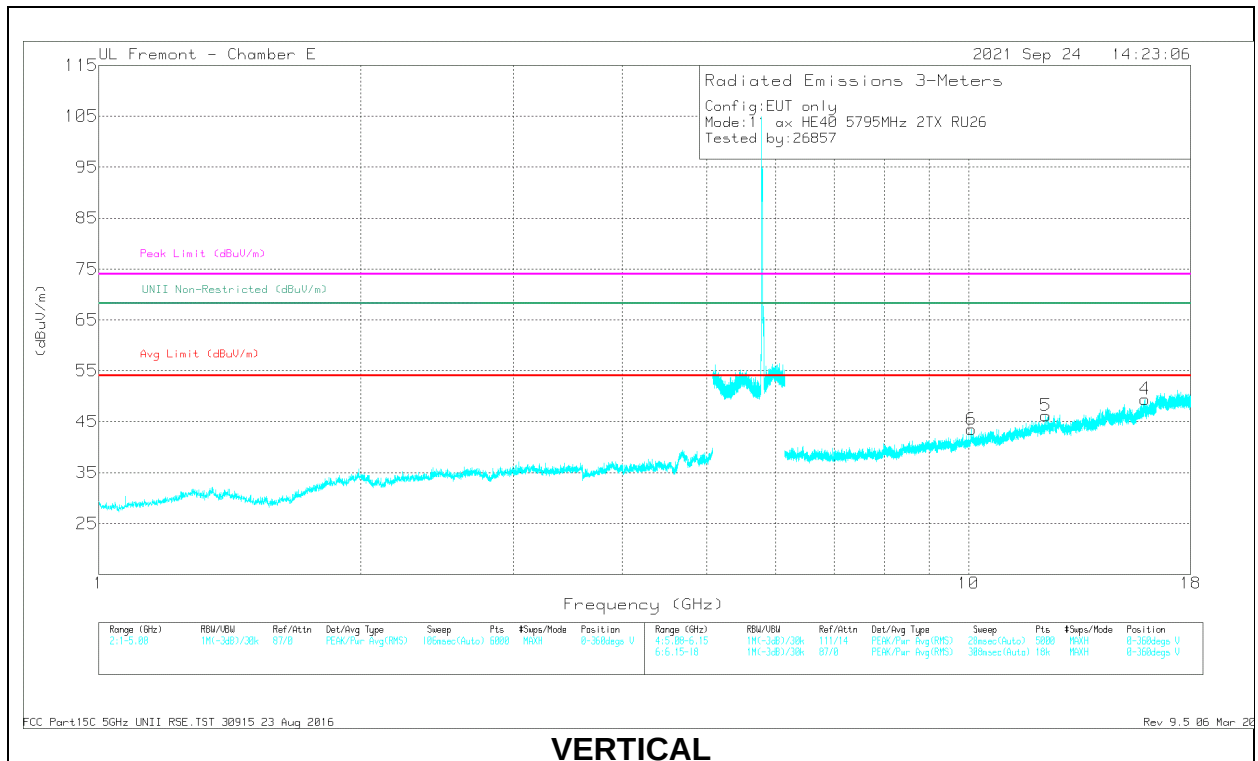
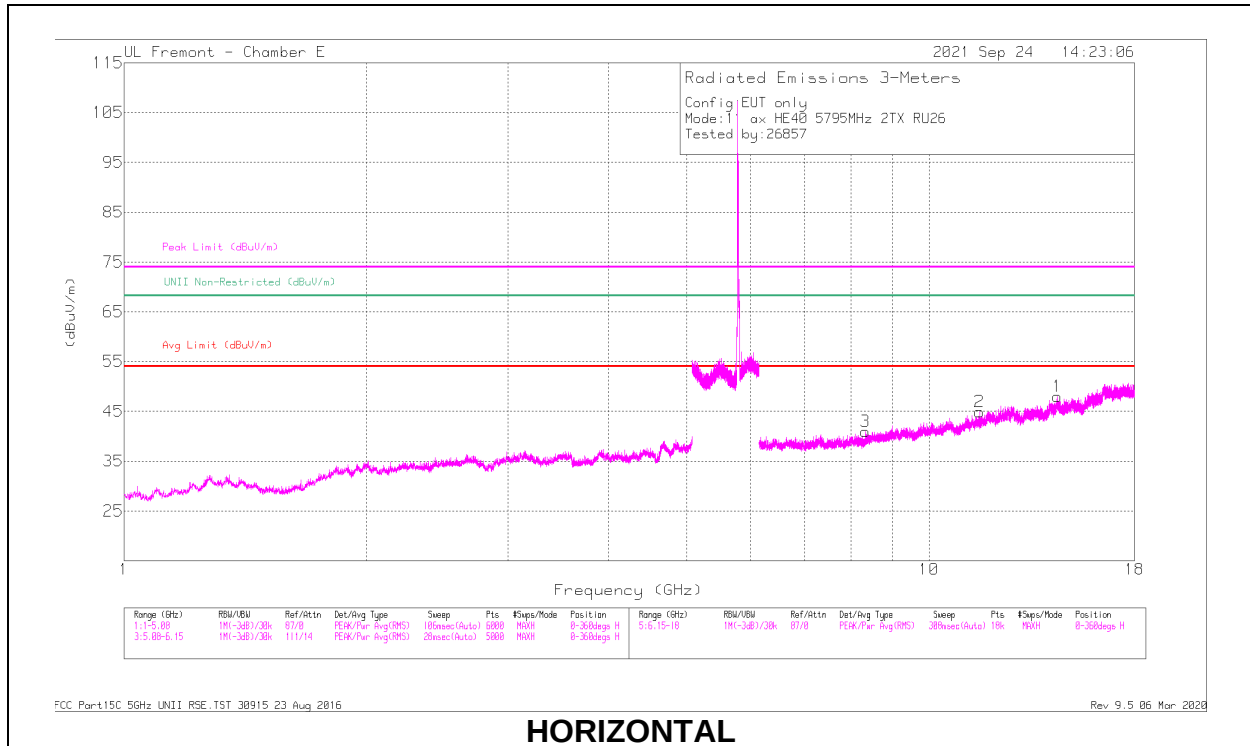
RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF PRE0078107 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 15.9469	35.12	PK-U	40.7	-19.2	56.62	-	-	74	-17.38	-	-	293	167	H
	* 15.9463	20.39	ADR	40.7	-19.2	41.89	54	-12.11	-	-	-	-	293	167	H
3	* 8.40497	37.07	PK-U	35.8	-25.8	47.07	-	-	74	-26.93	-	-	137	131	H
	* 8.40232	24.39	ADR	35.8	-25.7	34.49	54	-19.51	-	-	-	-	137	131	H
4	* 15.9336	34.46	PK-U	40.9	-19.1	56.26	-	-	74	-17.74	-	-	53	235	V
	* 15.9356	20.27	ADR	40.9	-19.1	42.07	54	-11.93	-	-	-	-	53	235	V
5	* 11.8534	35.55	PK-U	38.7	-22.2	52.05	-	-	74	-21.95	-	-	207	221	V
	* 11.8515	21.83	ADR	38.7	-22.2	38.33	54	-15.67	-	-	-	-	207	221	V
6	7.89147	37.31	PK-U	35.9	-26.9	46.31	-	-	-	-	68.2	-21.89	307	332	V
2	12.71933	35.28	PK-U	39.3	-21.3	53.28	-	-	-	-	68.2	-14.92	3	211	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

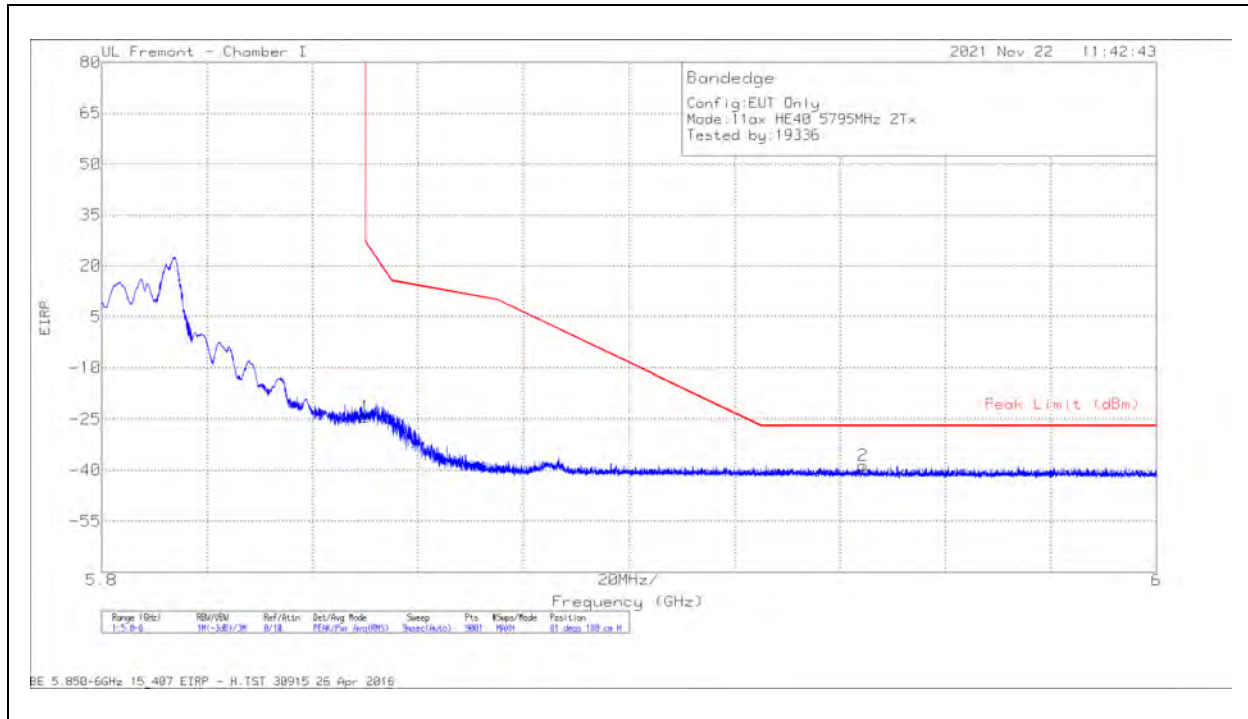
RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF PRE0078107 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 11.5548	40.14	PK-U	38.3	-22.7	55.74	-	-	74	-18.26	-	-	63	212	H
	* 11.5538	25.55	ADR	38.3	-22.7	41.15	54	-12.85	-	-	-	-	63	212	H
3	* 8.33603	36.73	PK-U	35.8	-26.1	46.43	-	-	74	-27.57	-	-	128	253	H
	* 8.33555	23.37	ADR	35.8	-26.1	33.07	54	-20.93	-	-	-	-	128	253	H
4	* 15.9454	35.21	PK-U	40.8	-19.2	56.81	-	-	74	-17.19	-	-	169	141	V
	* 15.9466	20.25	ADR	40.7	-19.2	41.75	54	-12.25	-	-	-	-	169	141	V
5	* 12.2688	34.71	PK-U	39.1	-21.6	52.21	-	-	74	-21.79	-	-	349	113	V
	* 12.2692	21.79	ADR	39.1	-21.6	39.29	54	-14.71	-	-	-	-	349	113	V
6	10.06778	36.59	PK-U	37.3	-24	49.89	-	-	-	-	68.2	-18.31	296	337	V
1	14.43408	35.33	PK-U	39.6	-19.8	55.13	-	-	-	-	68.2	-13.07	155	158	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

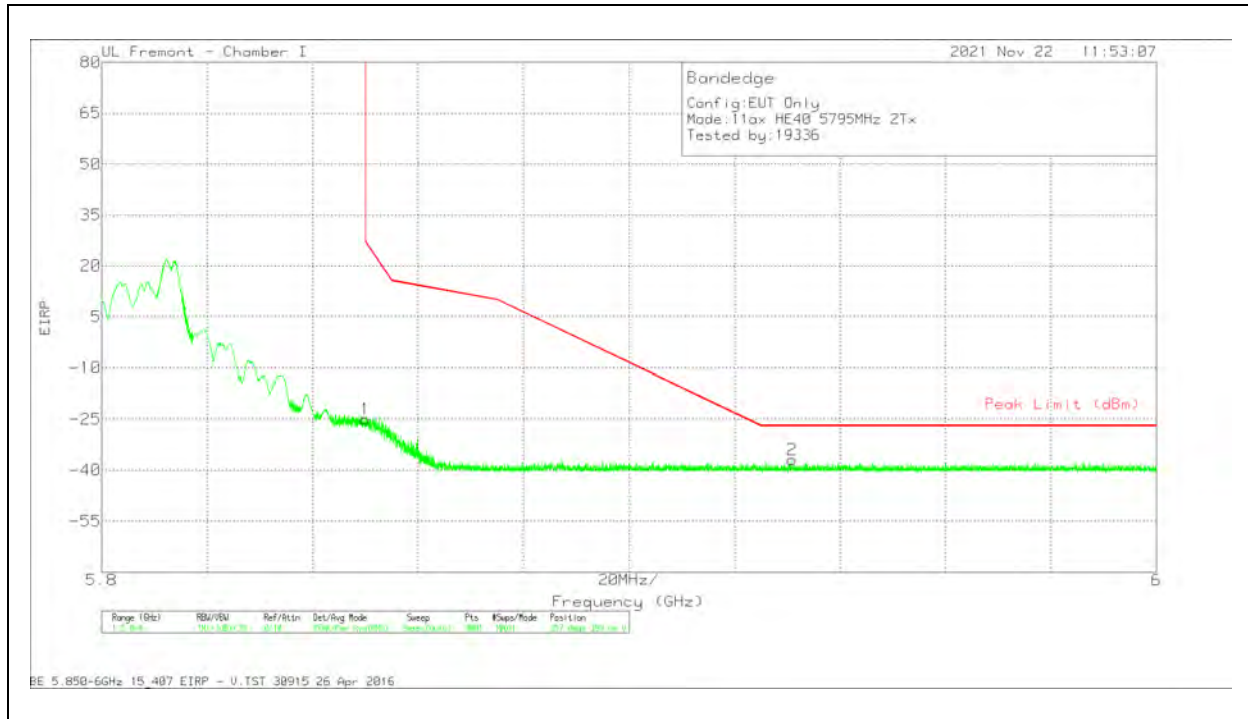
PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 6 + Antenna 3 OFDMA MODE: 26-Tones, RU Index 17**BANDEGE (HIGH CHANNEL)****HORIZONTAL RESULT**

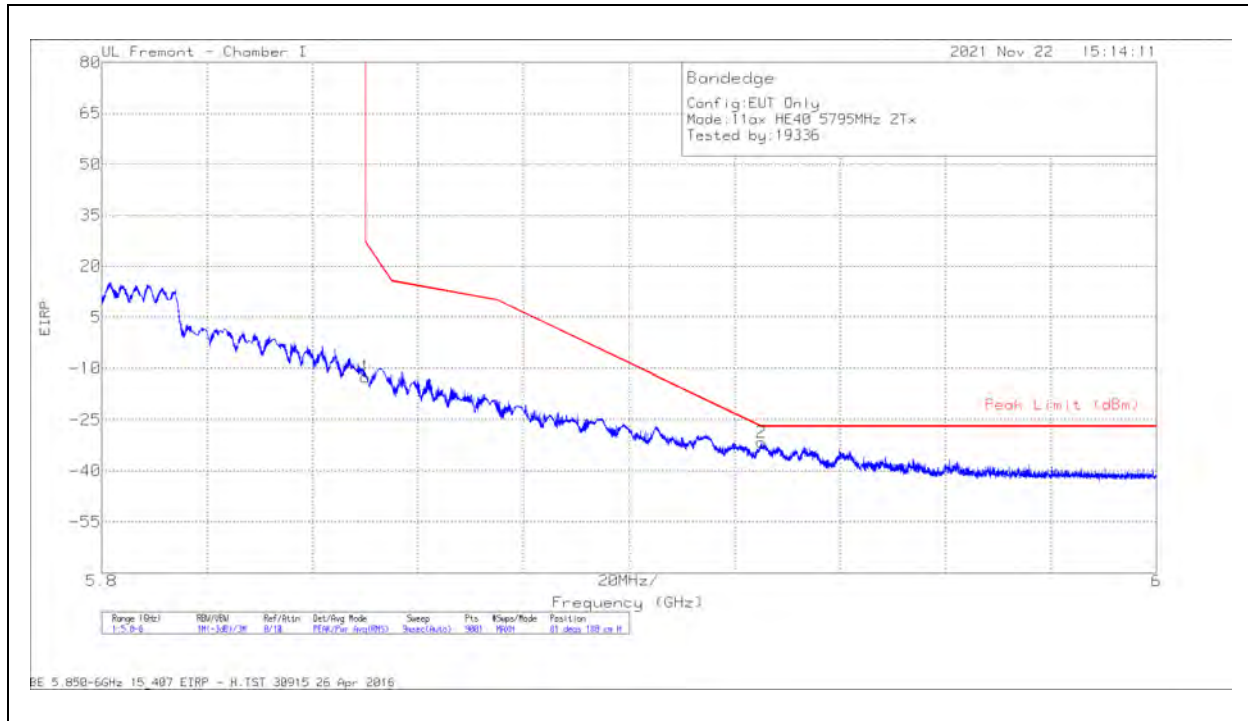
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-55.8	Pk	34.8	-15.1	11.8	0	-24.3	27	-51.3	81	188	H
2	5.94433	-70.53	Pk	35	-14.9	11.8	0	-38.63	-27	-11.63	81	188	H

Pk - Peak detector

VERTICAL RESULT

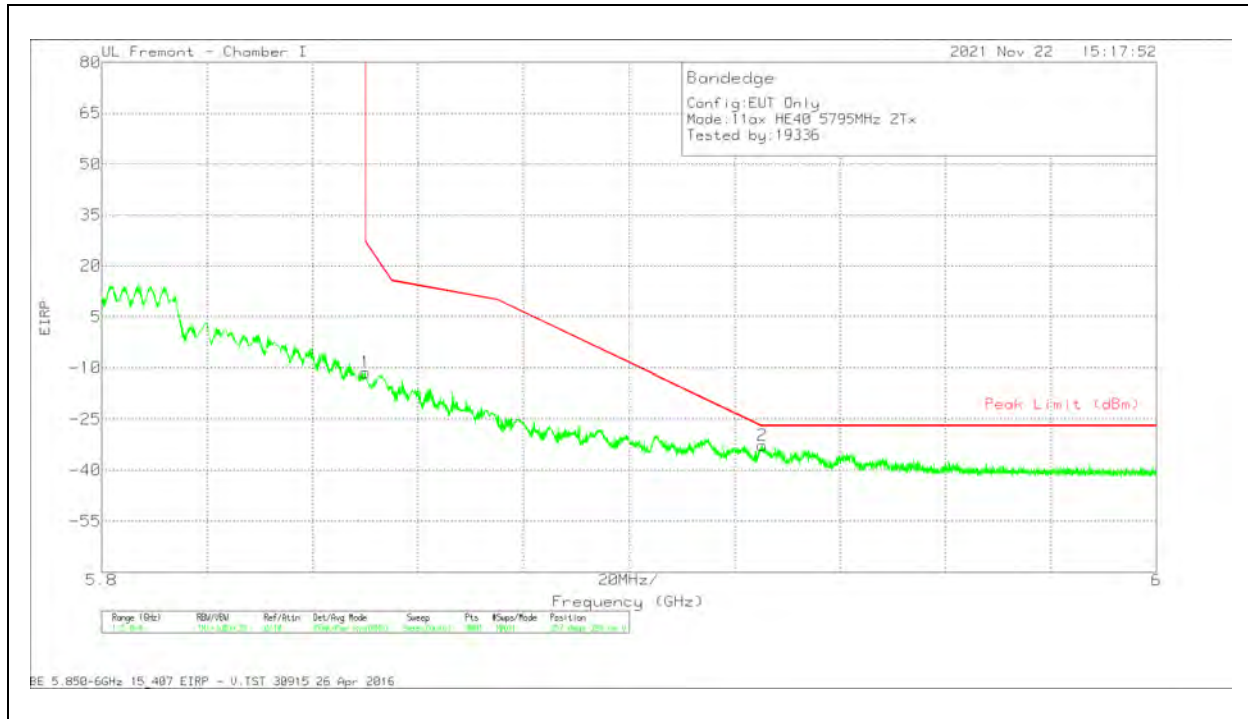
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Ampl/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-56.41	Pk	34.8	-15.1	11.8	0	-24.91	27	-51.91	357	399	V
2	5.93095	-68.83	Pk	35	-14.9	11.8	0	-36.93	-27	-9.93	357	399	V

Pk - Peak detector

2TX Antenna 6 + Antenna 3 OFDMA MODE: 484-Tones, RU Index 65**BANDEDGE (HIGH CHANNEL)****HORIZONTAL RESULT**

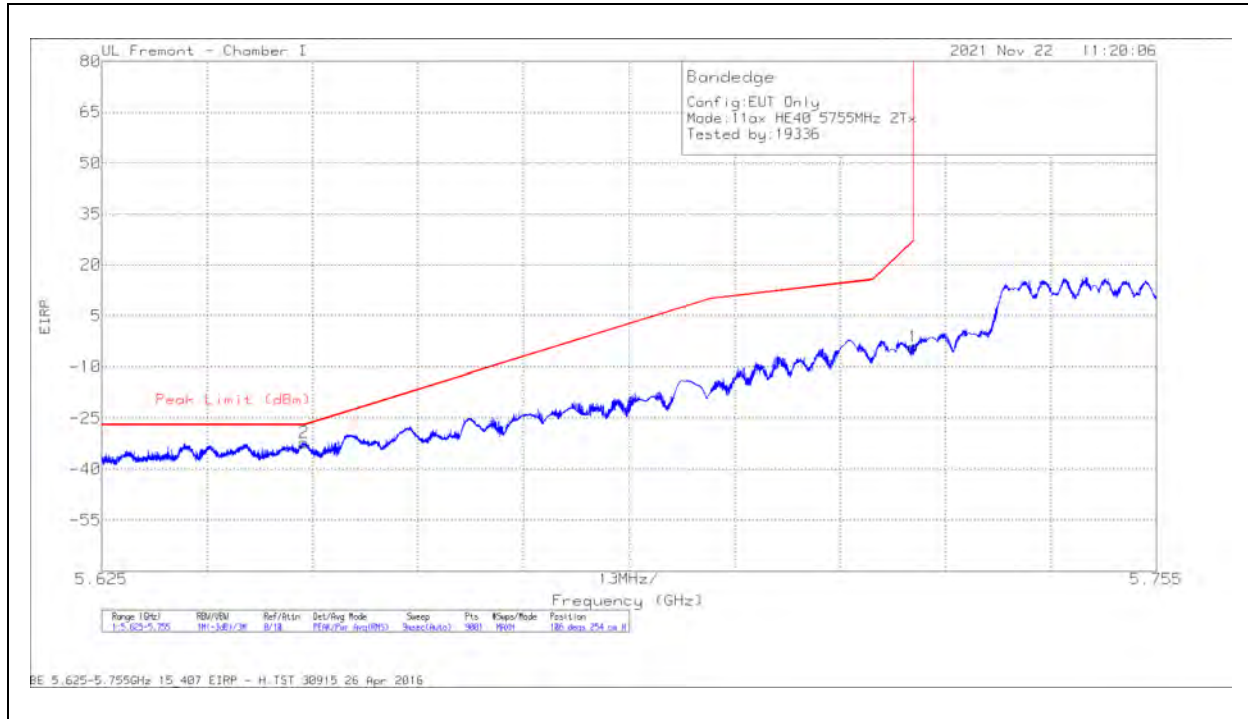
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-43.86	Pk	34.8	-15.1	11.8	0	-12.36	27	-39.36	81	188	H
2	5.92511	-63.41	Pk	35	-15	11.8	0	-31.61	-27	-4.61	81	188	H

Pk - Peak detector

VERTICAL RESULT

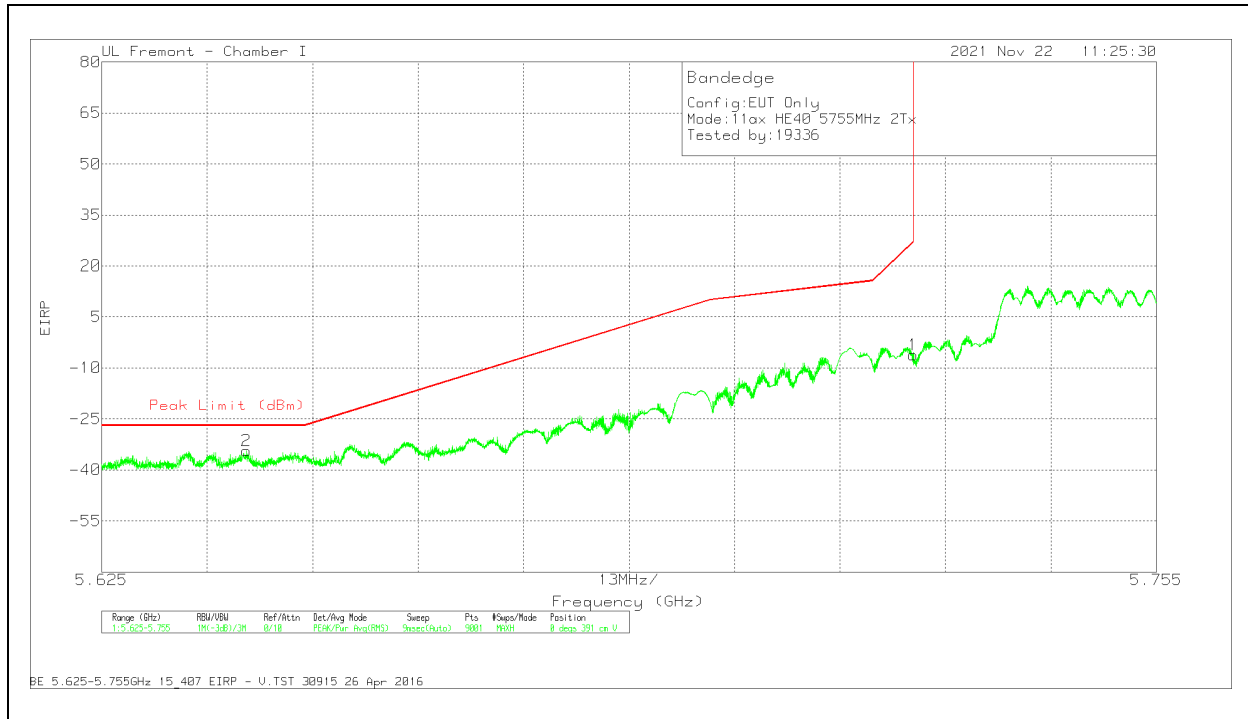
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Filt/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-42.87	Pk	34.8	-15.1	11.8	0	-11.37	27	-38.37	357	399	V
2	5.9252	-64.52	Pk	35	-15	11.8	0	-32.72	-27	-5.72	357	399	V

Pk - Peak detector

BANDEDGE (LOW CHANNEL)**HORIZONTAL RESULT**

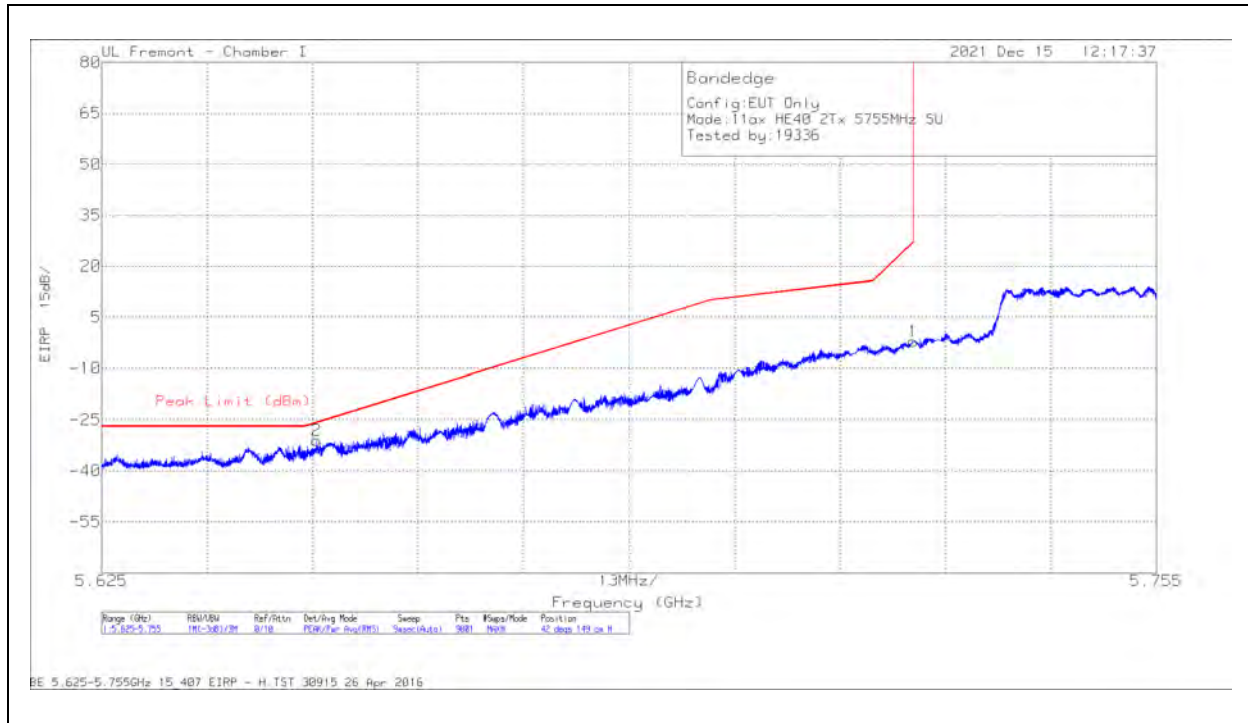
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-34.52	Pk	34.5	-16	11.8	0	-4.22	27	-31.22	106	254	H
2	5.64996	-62.16	Pk	34.4	-16.1	11.8	0	-32.06	-27	-5.06	106	254	H

Pk - Peak detector

VERTICAL RESULT

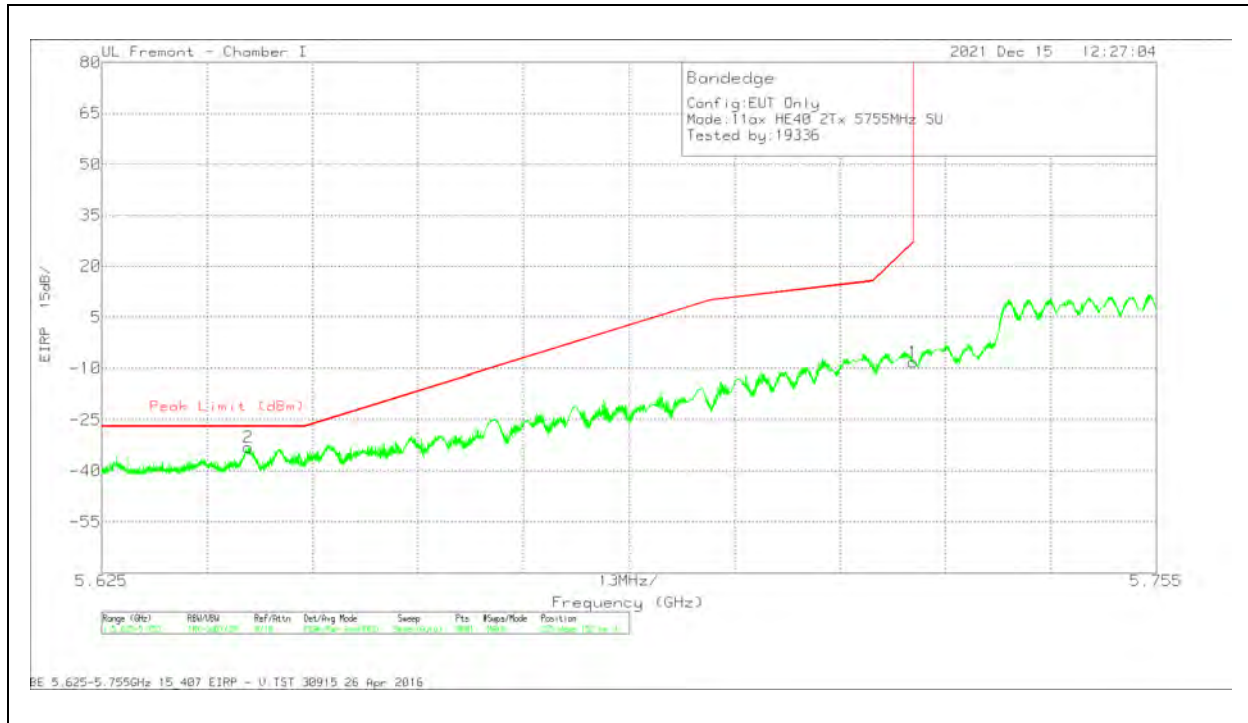
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Ampl/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-36.42	Pk	34.5	-16	11.8	0	-6.12	27	-33.12	0	391	V
2	5.64287	-64.56	Pk	34.4	-16	11.8	0	-34.36	-27	-7.36	0	391	V

Pk - Peak detector

2TX Antenna 6 + Antenna 3 OFDMA MODE: SU, Single User**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**

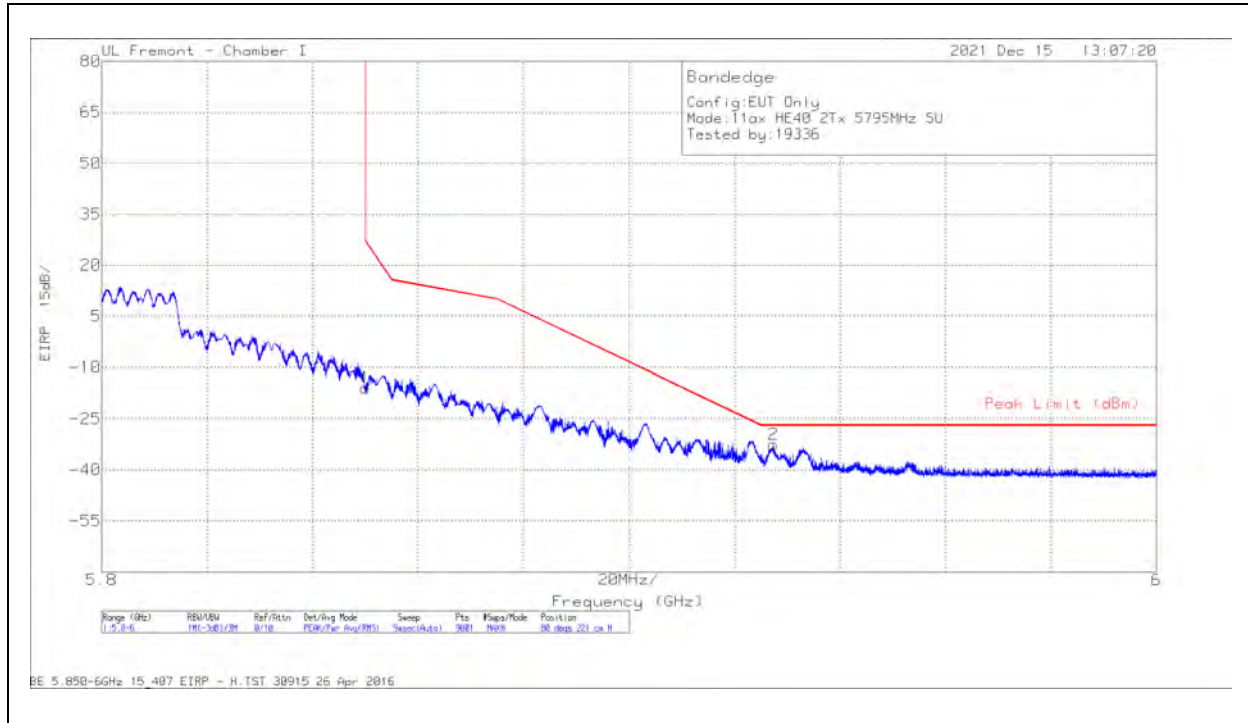
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-32.49	Pk	34.5	-16	11.8	0	-2.19	27	-29.19	42	149	H
2	5.65149	-61.08	Pk	34.4	-16.1	11.8	0	-30.98	-25.9	-5.08	42	149	H

Pk - Peak detector

VERTICAL RESULT

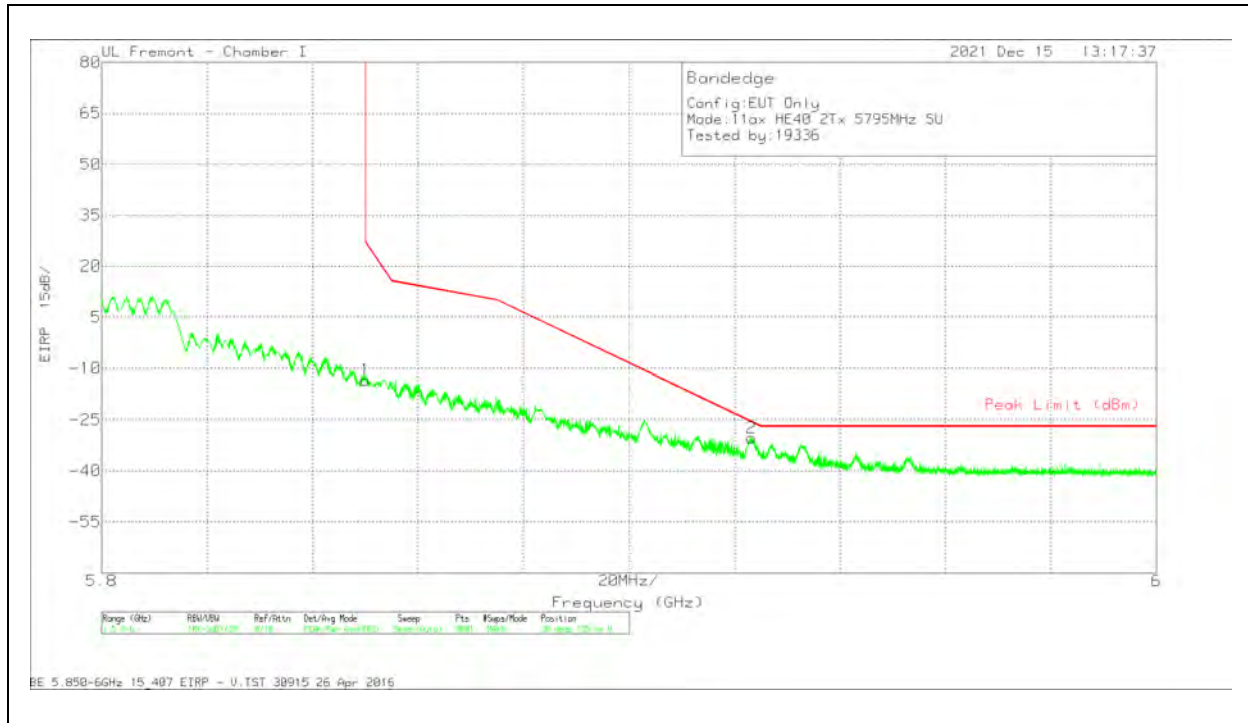
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-38.5	Pk	34.5	-16	11.8	0	-8.2	27	-35.2	355	152	V
2	5.643084	-63.31	Pk	34.4	-16	11.8	0	-33.11	-27	-6.11	355	152	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**

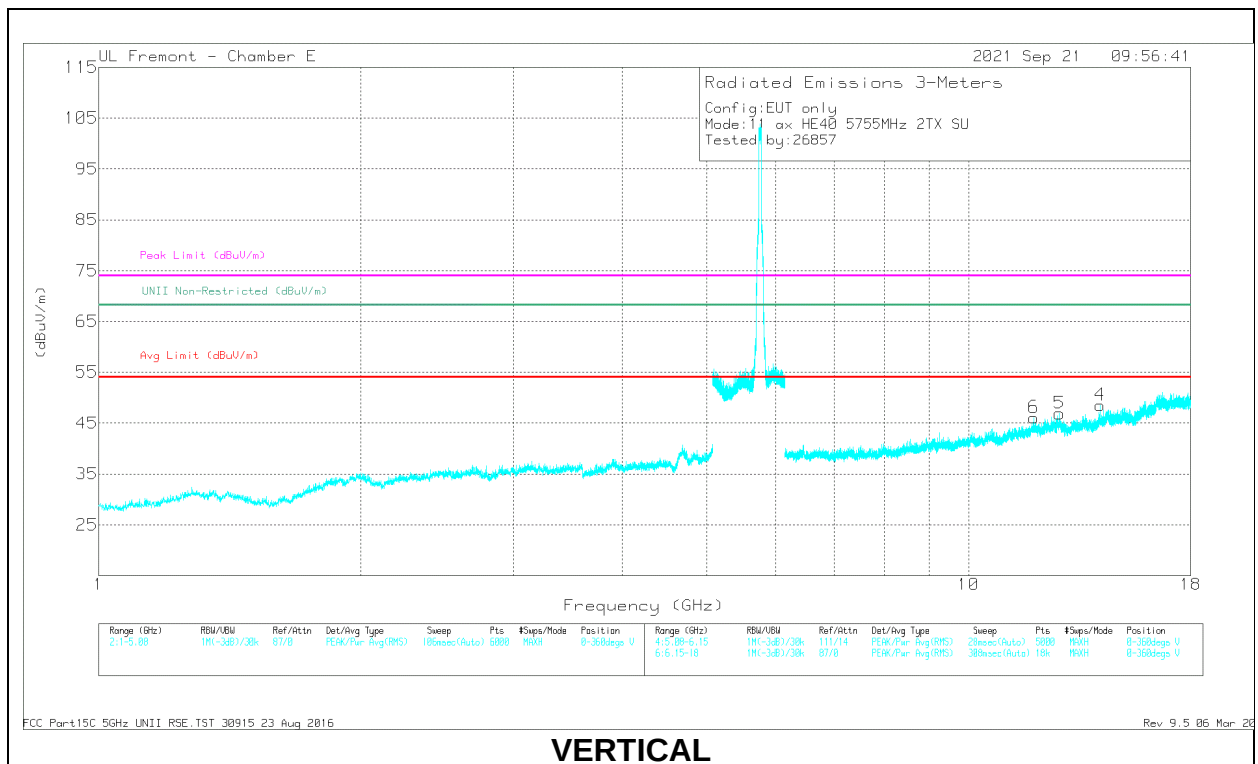
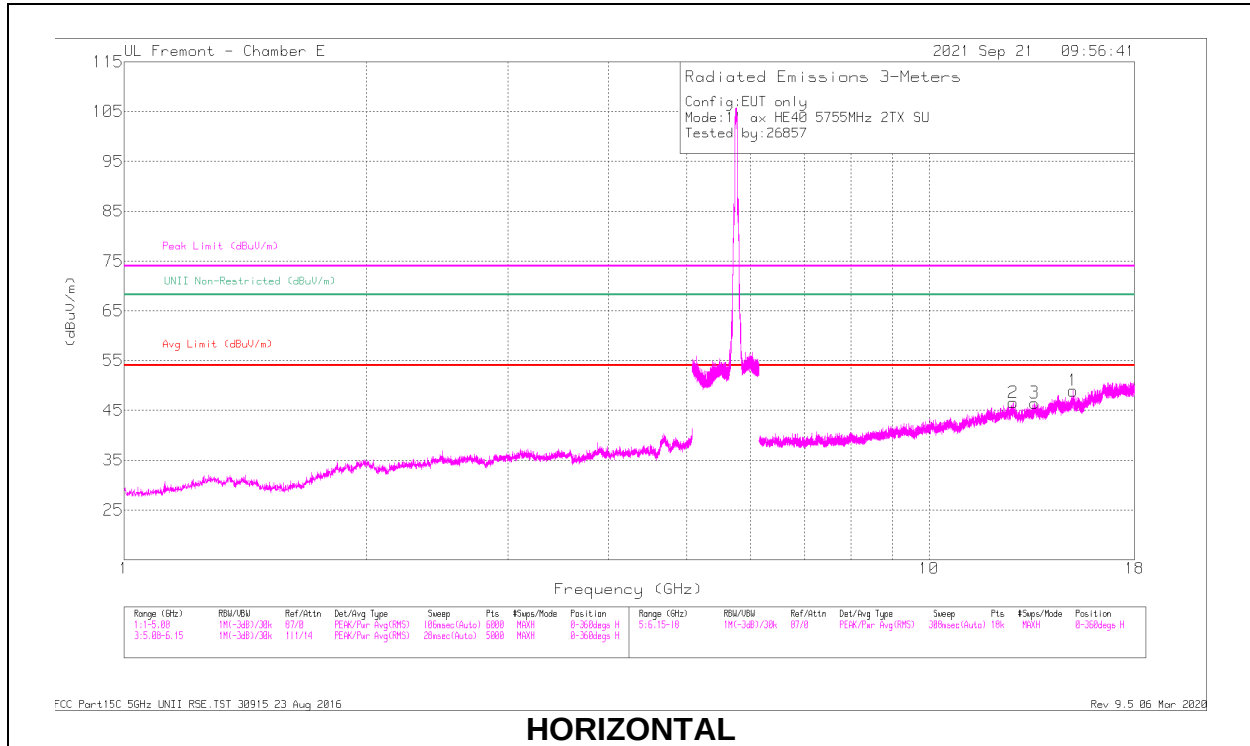
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-47.38	Pk	34.8	-15.1	11.8	0	-15.88	27	-42.88	80	221	H
2	5.927421	-64.27	Pk	35	-15	11.8	0	-32.47	-27	-5.47	80	221	H

Pk - Peak detector

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-44.81	Pk	34.8	-15.1	11.8	0	-13.31	27	-40.31	30	155	V
2	5.923177	-62.07	Pk	35	-15	11.8	0	-30.27	-25.65	-4.62	30	155	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS**LOW CHANNEL RESULTS**

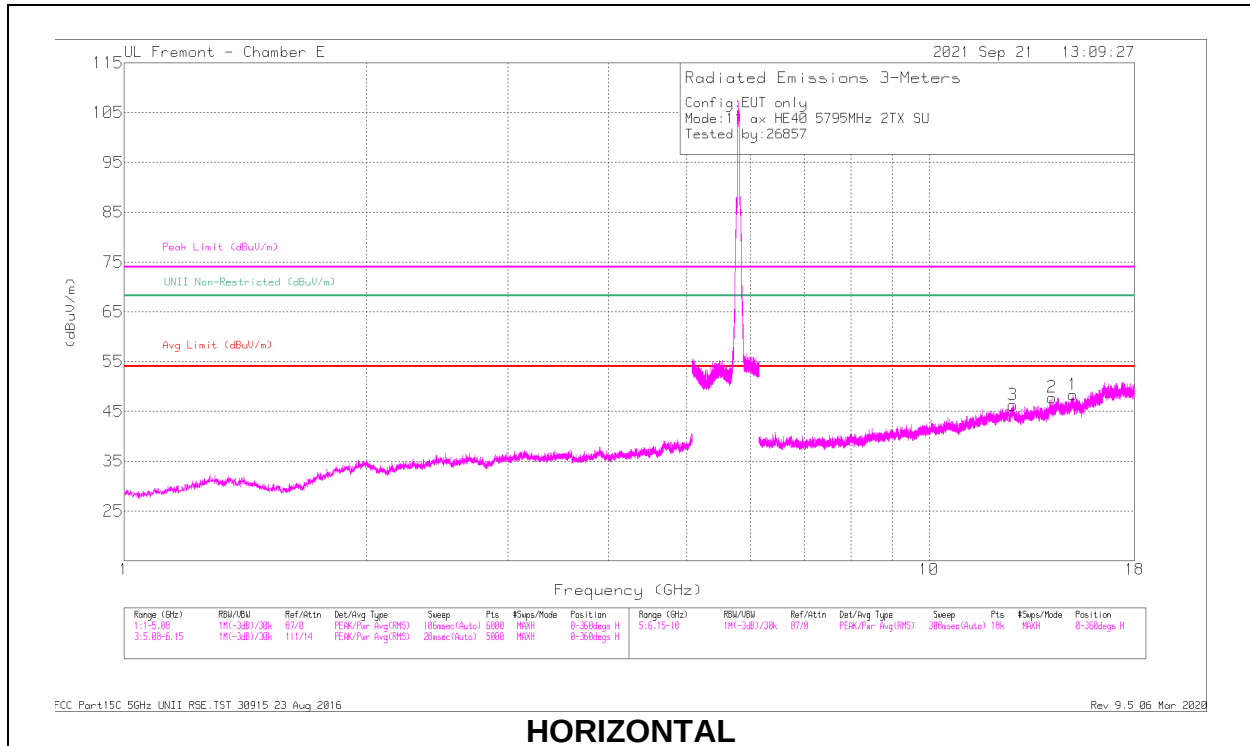
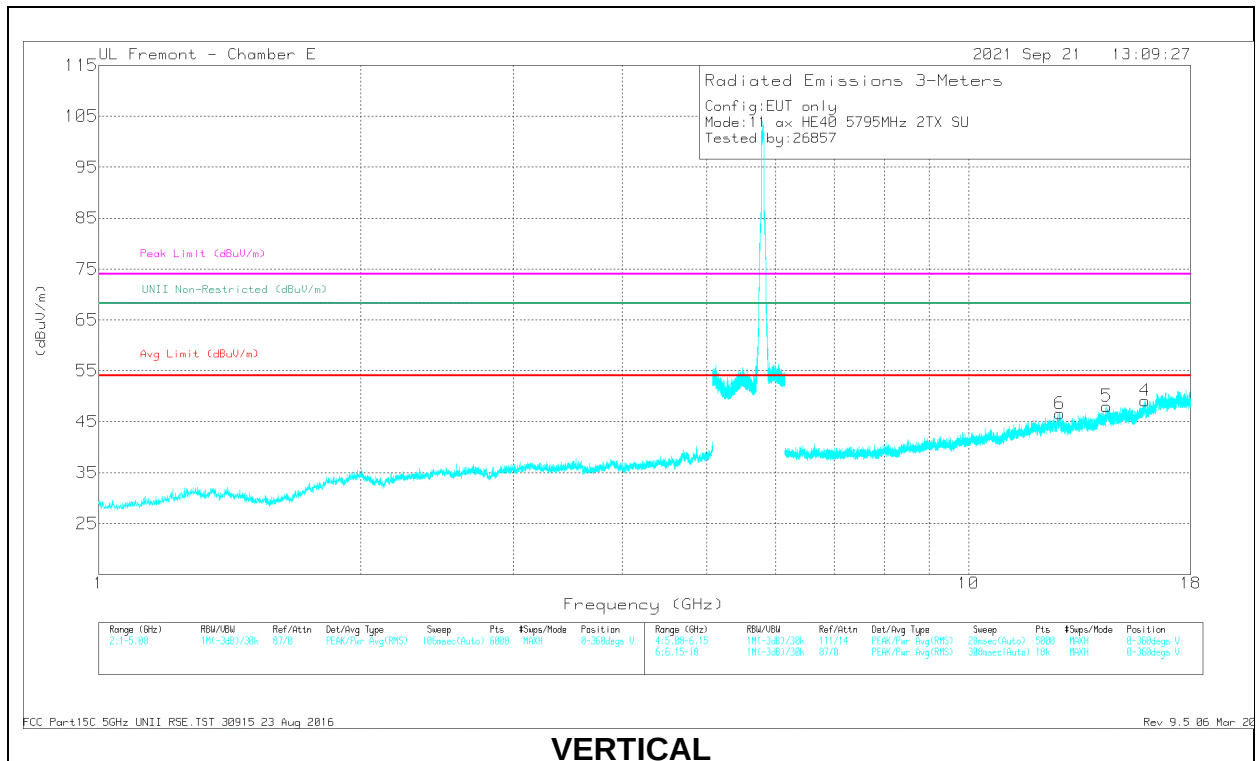
RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF PRE0078107 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 11.8871	35.08	PK-U	38.8	-22.3	0	51.58	-	-	74	-22.42	-	-	40	376	V
	* 11.8870	22.05	ADR	38.8	-22.3	.11	38.66	54	-15.34	-	-	-	-	40	376	V
5	12.71799	34.88	PK-U	39.3	-21.3	0	52.88	-	-	-	-	68.2	-15.32	333	333	V
2	12.72366	36.27	PK-U	39.3	-21.3	0	54.27	-	-	-	-	68.2	-13.93	221	141	H
3	13.52672	35.36	PK-U	38.9	-20.5	0	53.76	-	-	-	-	68.2	-14.44	353	156	H
4	14.16119	34.99	PK-U	39.2	-20	0	54.19	-	-	-	-	68.2	-14.01	119	209	V
1	15.1038	35.21	PK-U	39.8	-19.6	0	55.41	-	-	-	-	68.2	-12.79	160	177	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS**HORIZONTAL****VERTICAL**

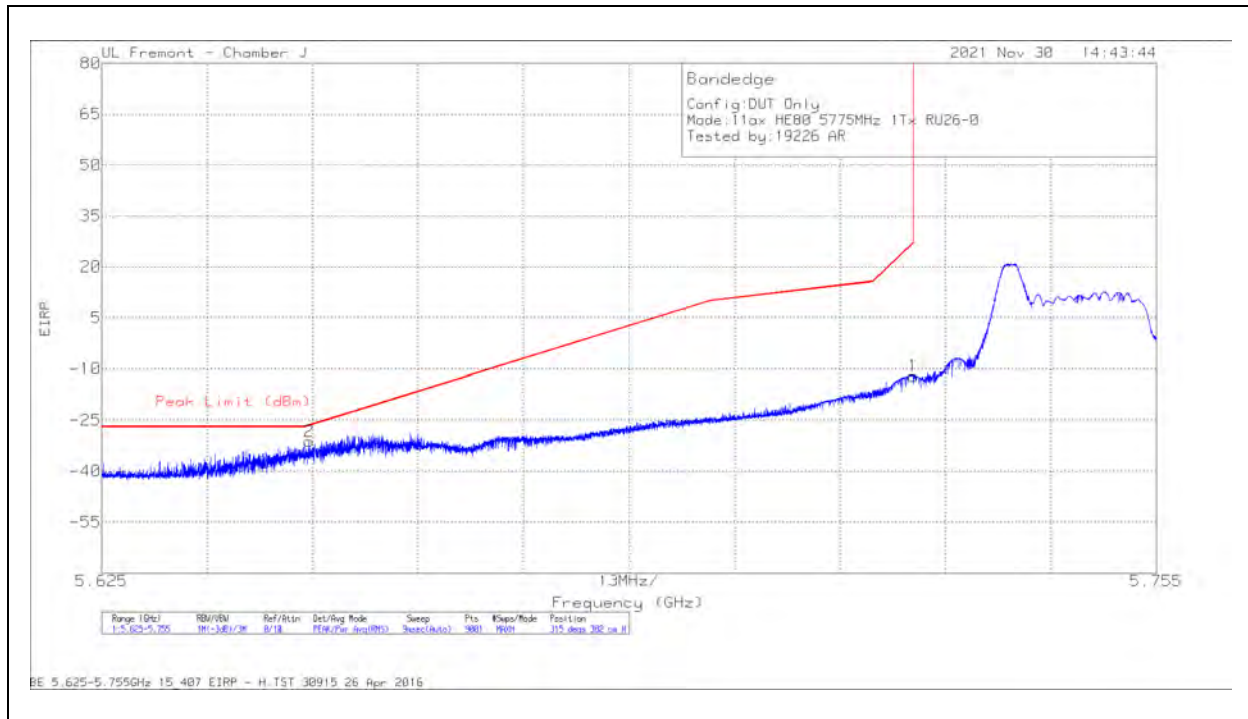
RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF PRE00781 07 (dB/m)	Amp/Cbl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 15.95342	35.74	PK-U	40.6	-19.4	0	56.94	-	-	74	-17.06	-	-	230	162	V
	* 15.95484	20.68	ADR	40.7	-19.4	.11	42.09	54	-11.91	-	-	-	-	230	162	V
3	12.71096	34.71	PK-U	39.3	-21.4	0	52.61	-	-	-	-	68.2	-15.59	353	194	H
6	12.73173	35.05	PK-U	39.3	-21.4	0	52.95	-	-	-	-	68.2	-15.25	18	353	V
2	14.21341	35.27	PK-U	39.2	-20.1	0	54.37	-	-	-	-	68.2	-13.83	149	336	H
5	14.41118	35.81	PK-U	39.4	-19.8	0	55.41	-	-	-	-	68.2	-12.79	327	189	V
1	15.1063	35.24	PK-U	39.8	-19.6	0	55.44	-	-	-	-	68.2	-12.76	111	189	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

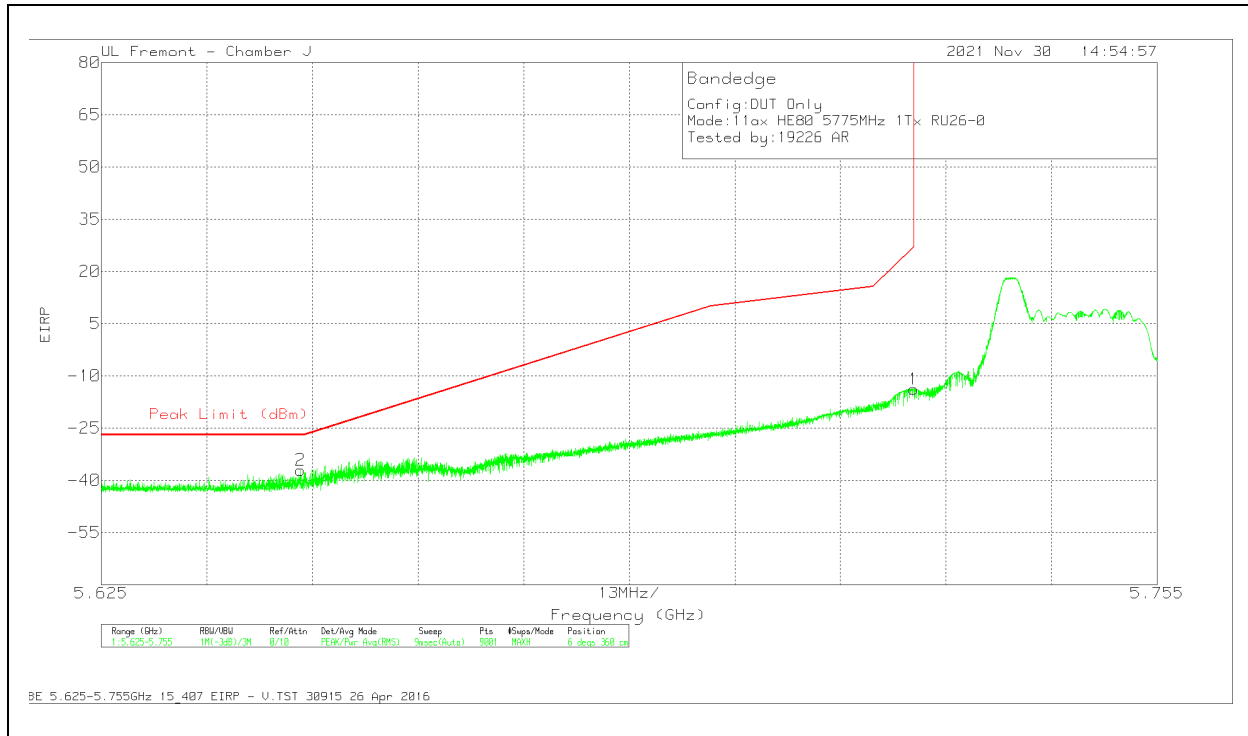
PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.24. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE 5.8GHz BAND**1TX Antenna 6 MODE: 26-Tones, RU Index 0****BANDEDGE (CHANNEL 155 LOW EDGE)****HORIZONTAL RESULT**

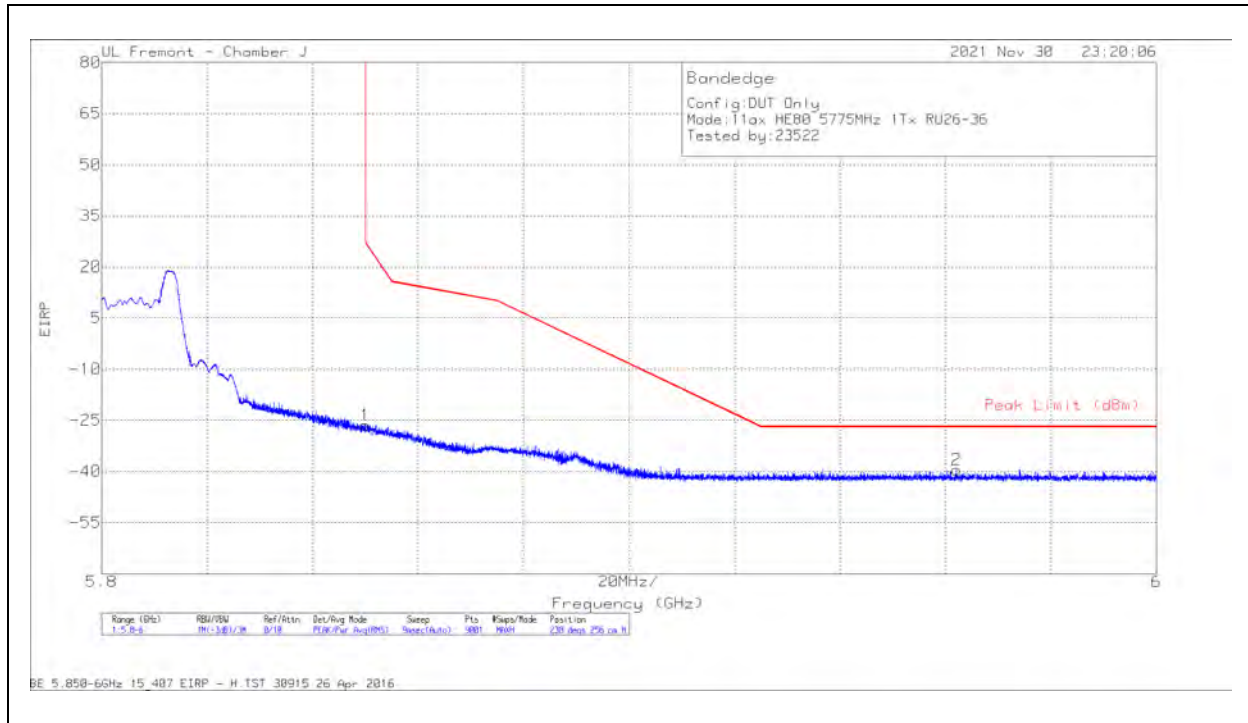
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-35.53	Pk	34.6	-22.9	11.8	-12.03	27	-39.03	315	382	H
2	5.65054	-54.45	Pk	34.5	-23	11.8	-31.15	-26.6	-4.55	315	382	H

Pk - Peak detector

VERTICAL RESULT

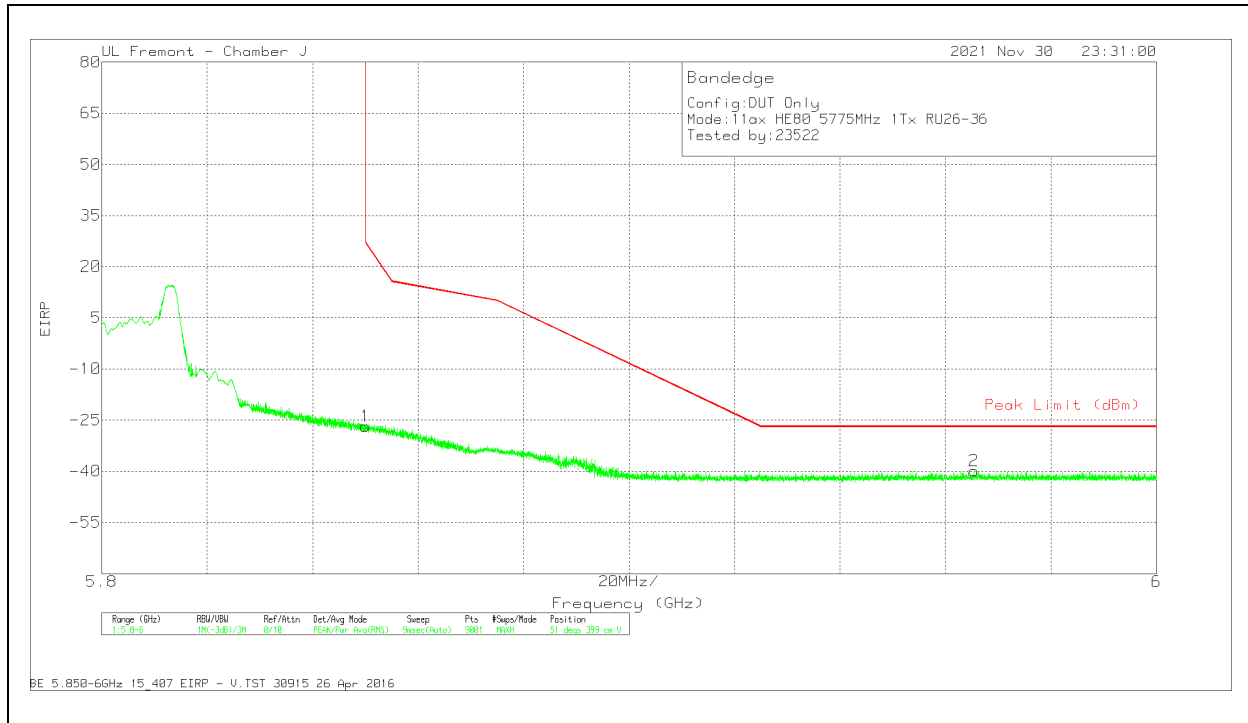
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-37.35	Pk	34.6	-22.9	11.8	-13.85	27	-40.85	6	360	V
2	5.64953	-60.42	Pk	34.5	-23	11.8	-37.12	-27	-10.12	6	360	V

Pk - Peak detector

1TX Antenna 6 MODE: 26-Tones, RU Index 36**BANDEDGE (CHANNEL 155 HIGH EDGE)****HORIZONTAL RESULT**

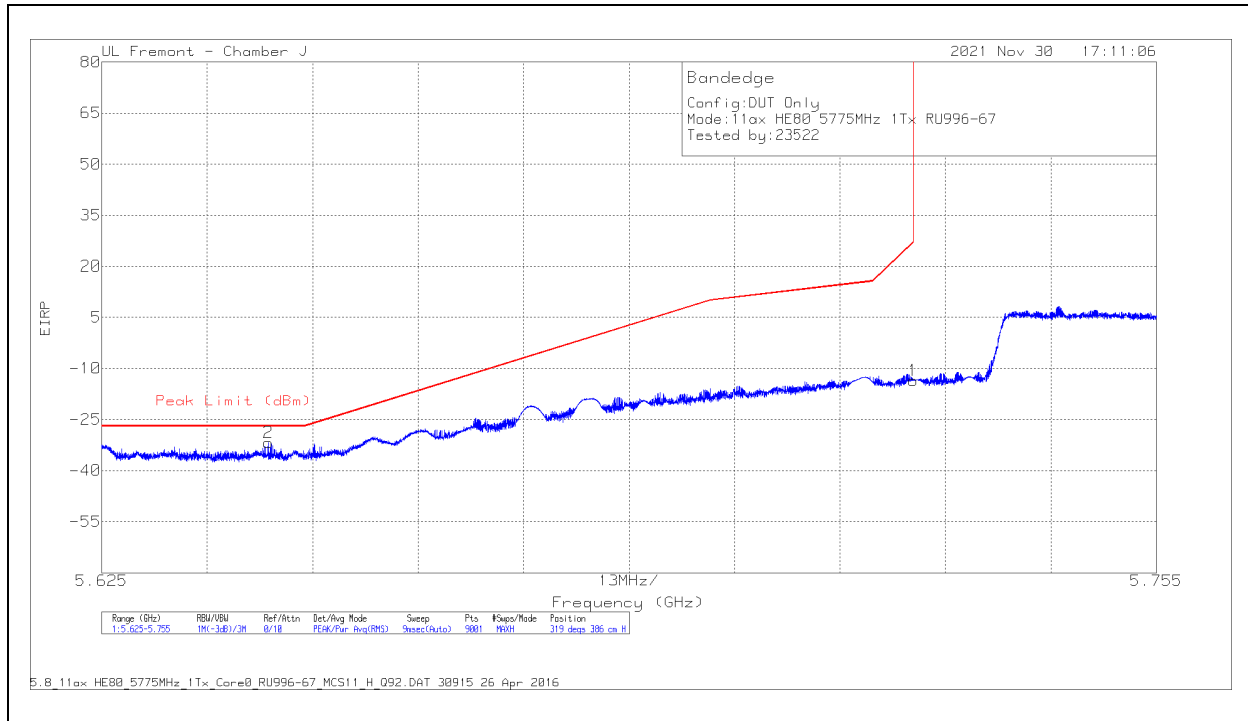
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cb/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-50.9	Pk	35.1	-22.5	11.8	-26.5	27	-53.5	238	256	H
2	5.96204	-64.15	Pk	35.1	-22.3	11.8	-39.55	-27	-12.55	238	256	H

Pk - Peak detector

VERTICAL RESULT

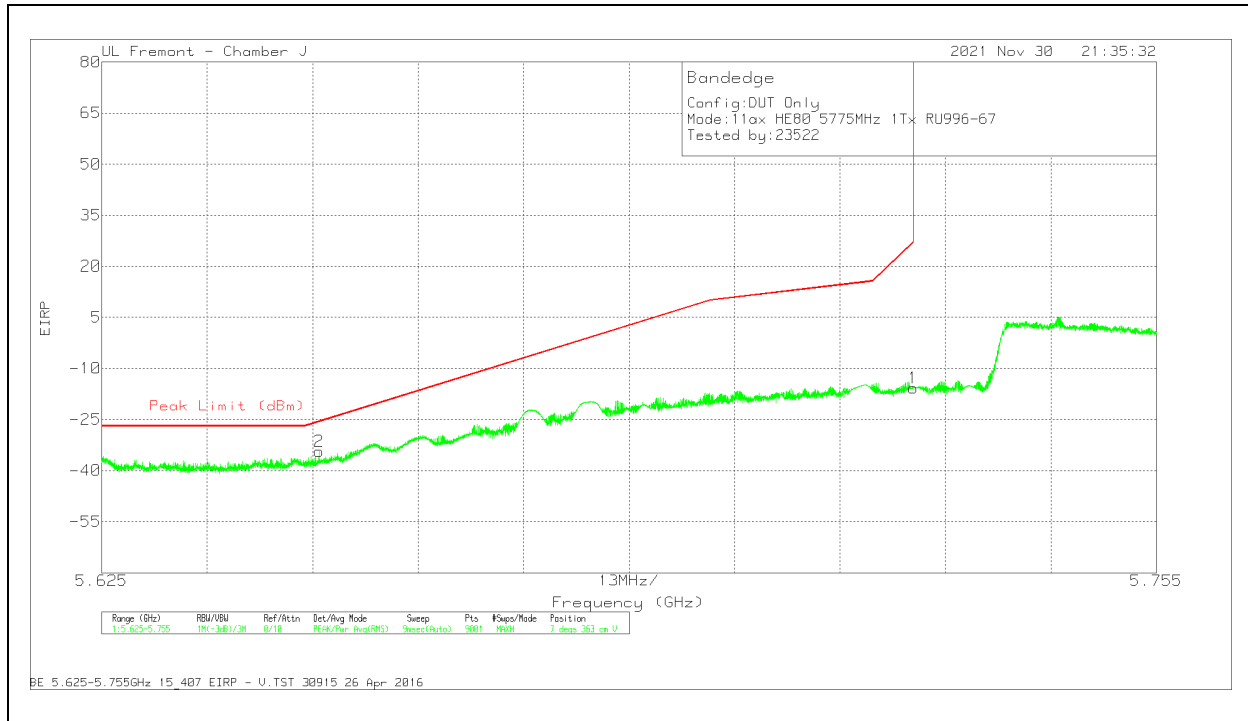
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-51.19	PK	35.1	-22.5	11.8	-26.79	27	-53.79	51	399	V
2	5.9654	-64.49	Pk	35.1	-22.3	11.8	-39.89	-27	-12.89	51	399	V

Pk - Peak detector

1TX Antenna 6 MODE: 996-Tones, RU Index 67**BANDEDGE (CHANNEL 155 LOW EDGE)****HORIZONTAL RESULT**

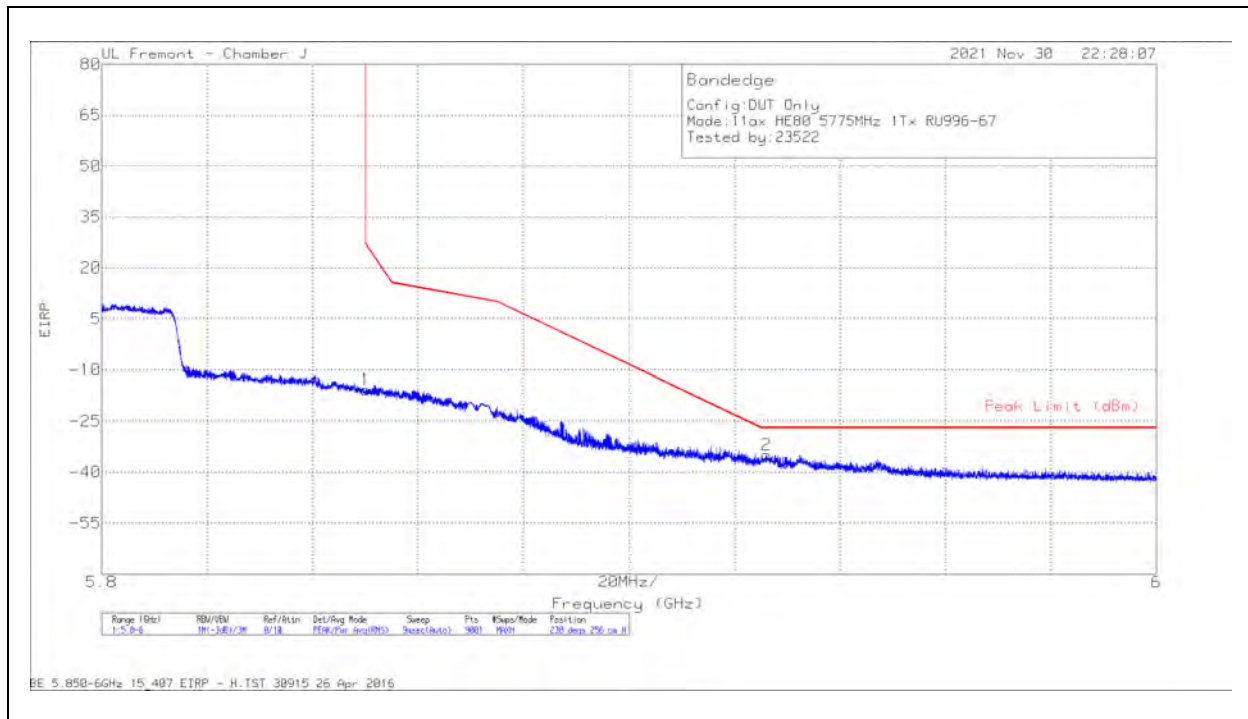
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-36.99	Pk	34.6	-22.9	11.8	-13.49	27	-40.49	319	386	H
2	5.64555	-55.15	Pk	34.5	-23	11.8	-31.85	-27	-4.85	319	386	H

Pk - Peak detector

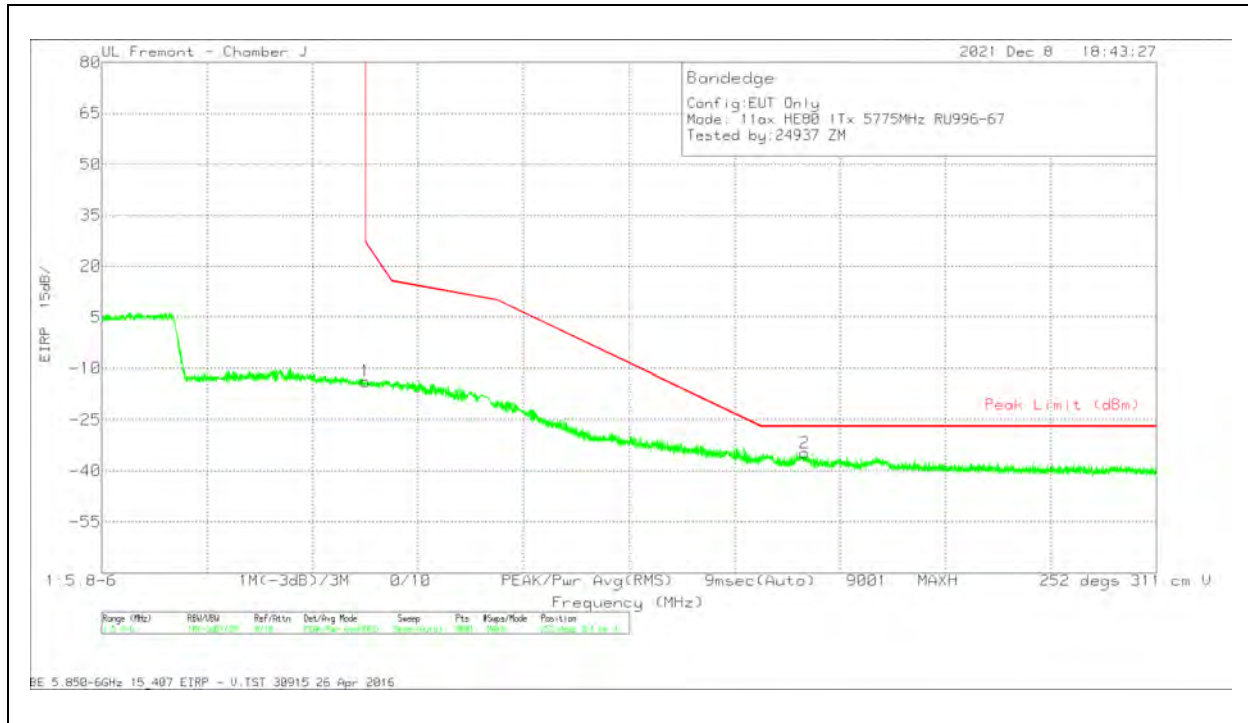
VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-39.24	Pk	34.6	-22.9	11.8	-15.74	-27	-42.74	7	363	V
2	5.65176	-57.66	Pk	34.5	-23	11.8	-34.36	-25.69	-8.67	7	363	V

Pk - Peak detector

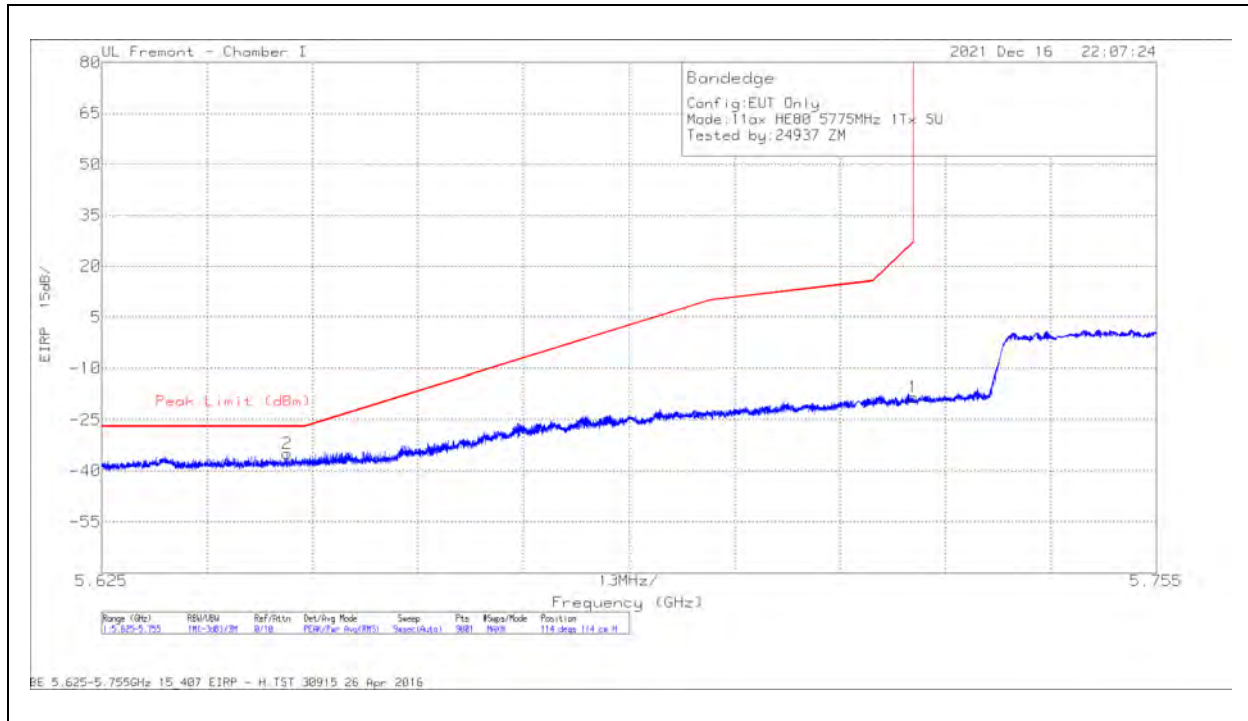


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-40.16	Pk	35.1	-22.5	11.8	-15.76	27	-42.76	238	256	H
2	5.92613	-59.45	Pk	35.1	-22.3	11.8	-34.85	-27	-7.85	238	256	H

VERTICAL RESULT

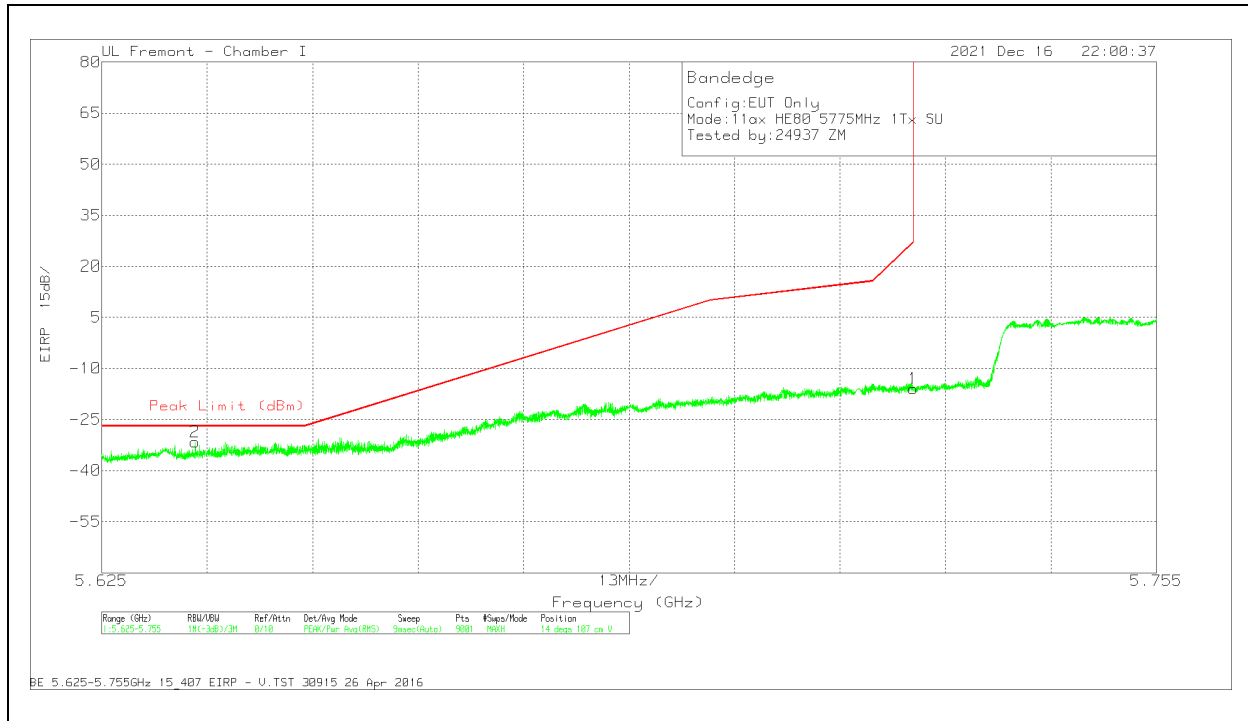
Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-38.16	Pk	35.1	-22.5	11.8	-13.76	27	-40.76	252	311	V
2	5933.332	-59.25	Pk	35.1	-22.3	11.8	-34.65	-27	-7.65	252	311	V

Pk - Peak detector

1TX Antenna 6 MODE: SU, Single User**BANDEDGE (CHANNEL 155 LOW EDGE)****HORIZONTAL RESULT**

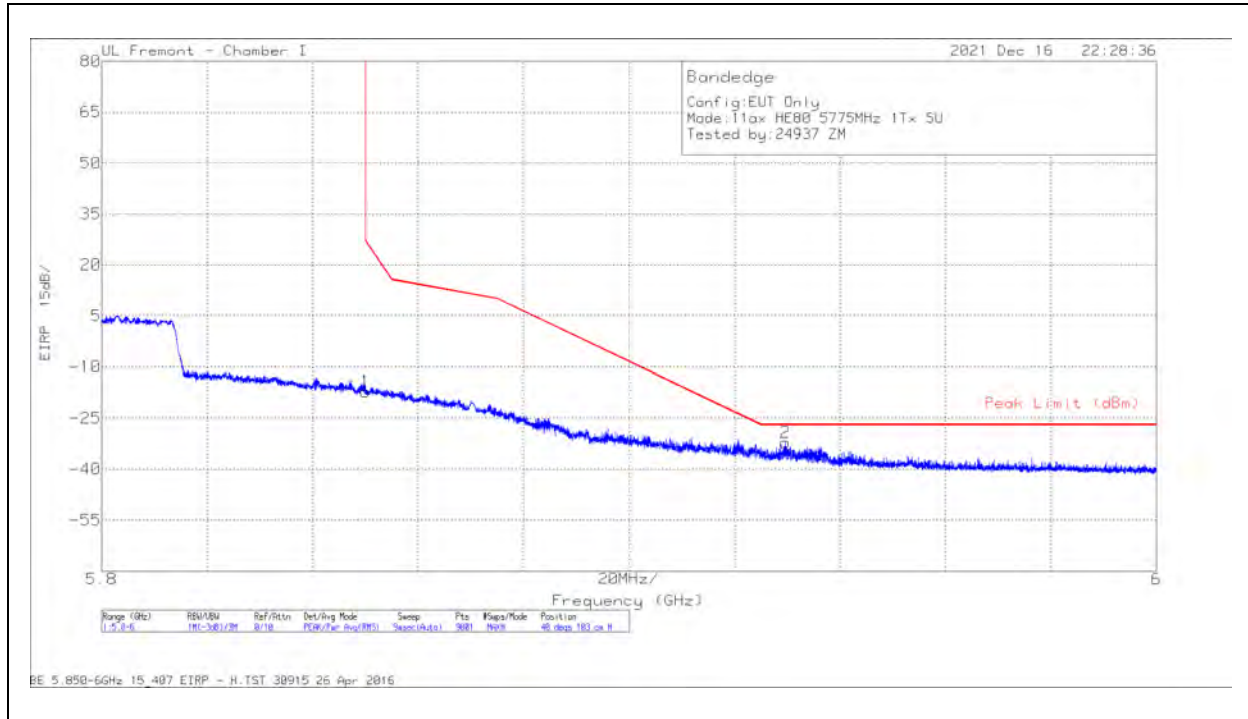
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-48.65	Pk	34.5	-16	11.8	0	-18.35	27	-45.35	114	114	H
2	5.647836	-65.05	Pk	34.4	-16.1	11.8	0	-34.95	-27	-7.95	114	114	H

Pk - Peak detector

VERTICAL RESULT

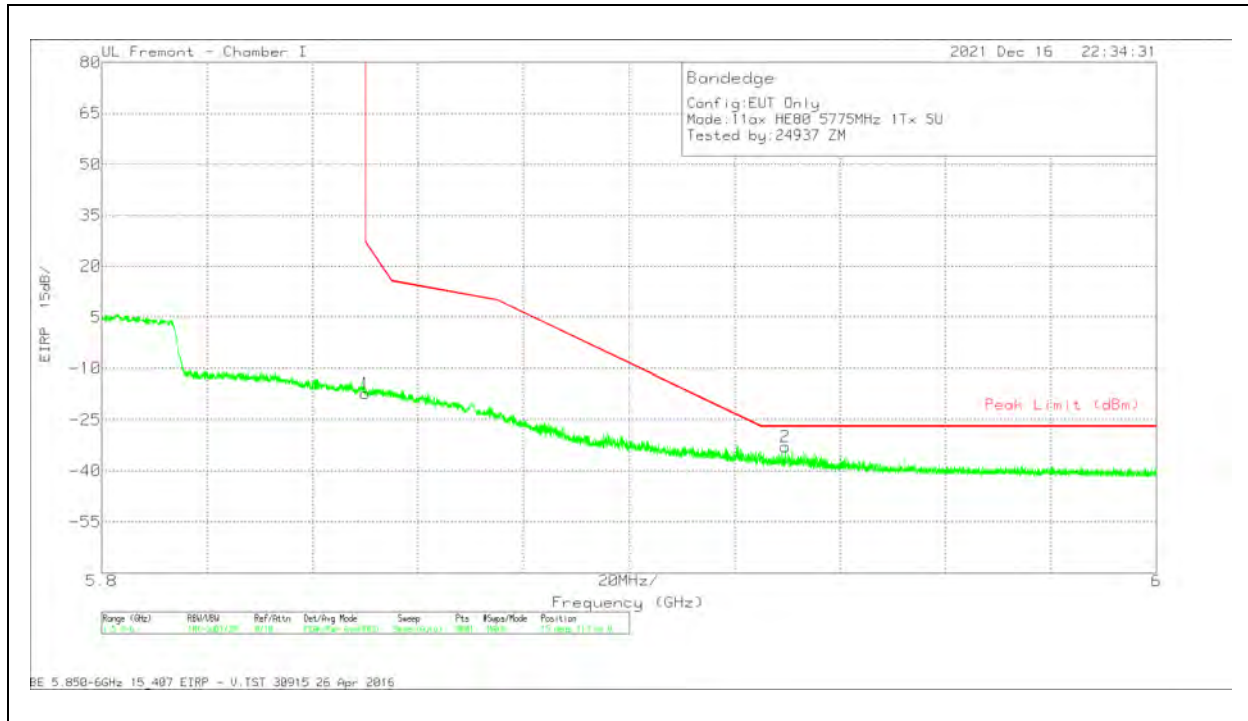
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-46.15	Pk	34.5	-16	11.8	0	-15.85	27	-42.85	14	107	V
2	5.636512	-61.95	Pk	34.4	-15.9	11.8	0	-31.65	-27	-4.65	14	107	V

Pk - Peak detector

BANDEDGE (CHANNEL 155 HIGH EDGE)**HORIZONTAL RESULT**

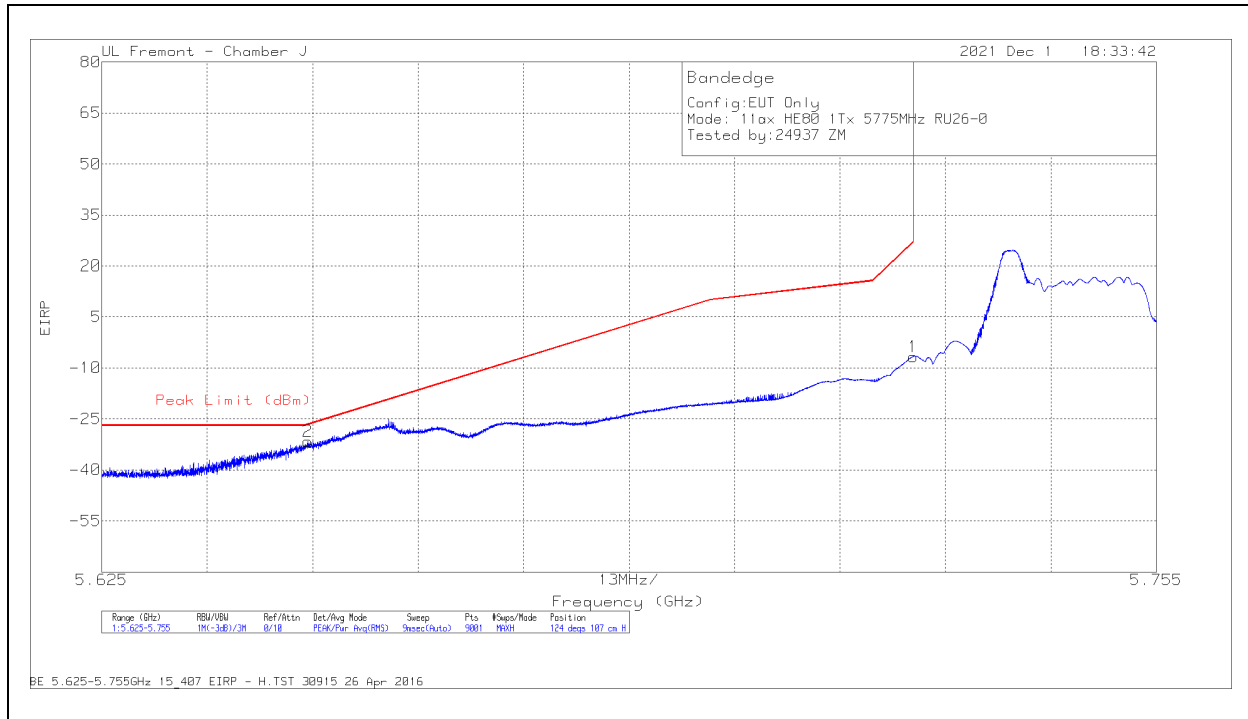
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Filr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-48.62	Pk	34.8	-15.1	11.8	0	-17.12	27	-44.12	40	103	H
2	5.929688	-64.1	Pk	35	-14.9	11.8	0	-32.2	-27	-5.2	40	103	H

Pk - Peak detector

VERTICAL RESULT

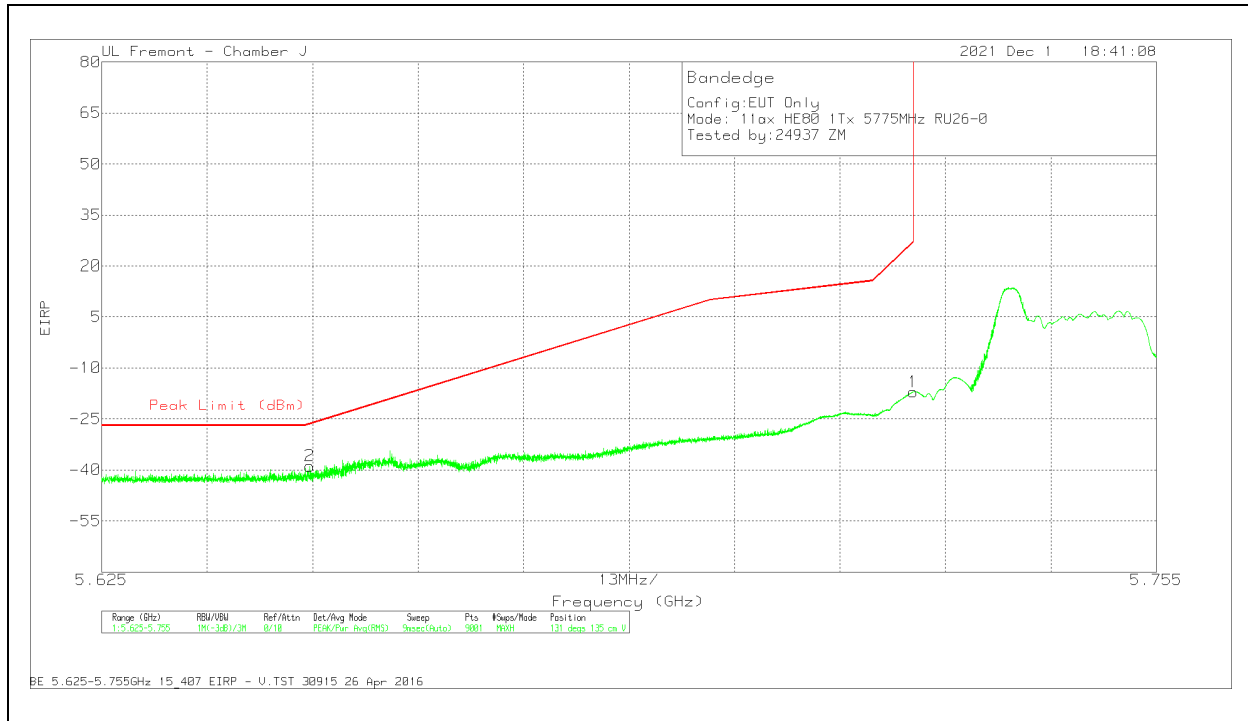
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206805 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-48.7	Pk	34.8	-15.1	11.8	0	-17.2	27	-44.2	15	113	V
2	5.929621	-64.74	Pk	35	-14.9	11.8	0	-32.84	-27	-5.84	15	113	V

Pk - Peak detector

1TX Antenna 3 MODE: 26-Tones, RU Index 0**BANDEDGE (CHANNEL 155 LOW EDGE)****HORIZONTAL RESULT**

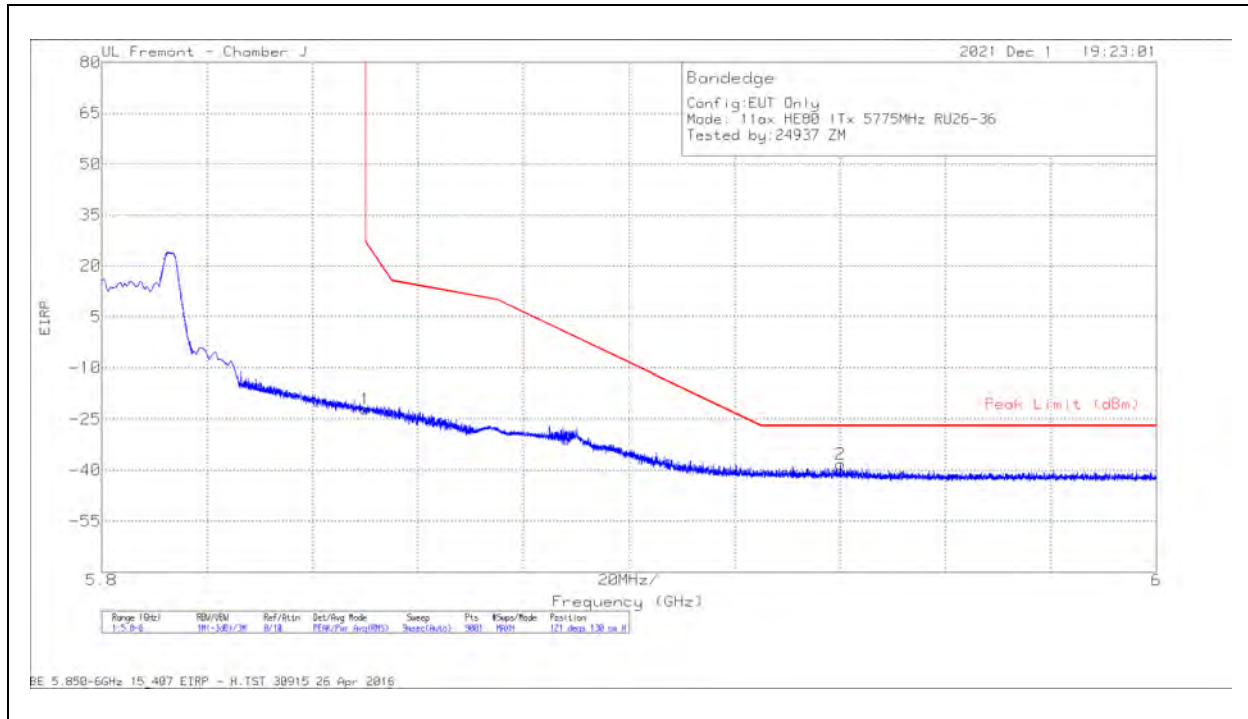
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-30.14	Pk	34.6	-22.9	11.8	-6.64	27	-33.64	124	107	H
2	5.65041	-54.88	Pk	34.5	-23	11.8	-31.58	-26.7	-4.88	124	107	H

Pk - Peak detector

VERTICAL RESULT

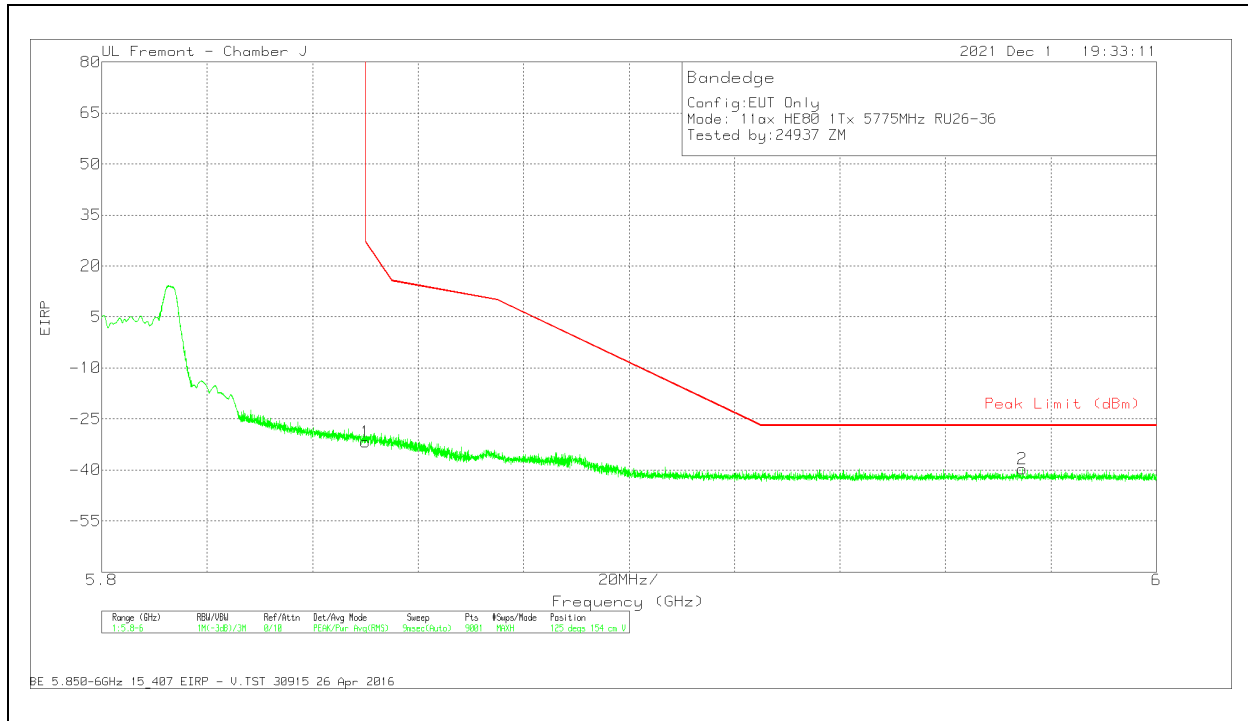
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-40.57	Pk	34.6	-22.9	11.8	-17.07	27	-44.07	131	135	V
2	5.65064	-62.16	Pk	34.5	-23	11.8	-38.86	-26.53	-12.33	131	135	V

Pk - Peak detector

1TX Antenna 3 MODE: 26-Tones, RU Index 36**BANDEDGE (CHANNEL 155 HIGH EDGE)****HORIZONTAL RESULT**

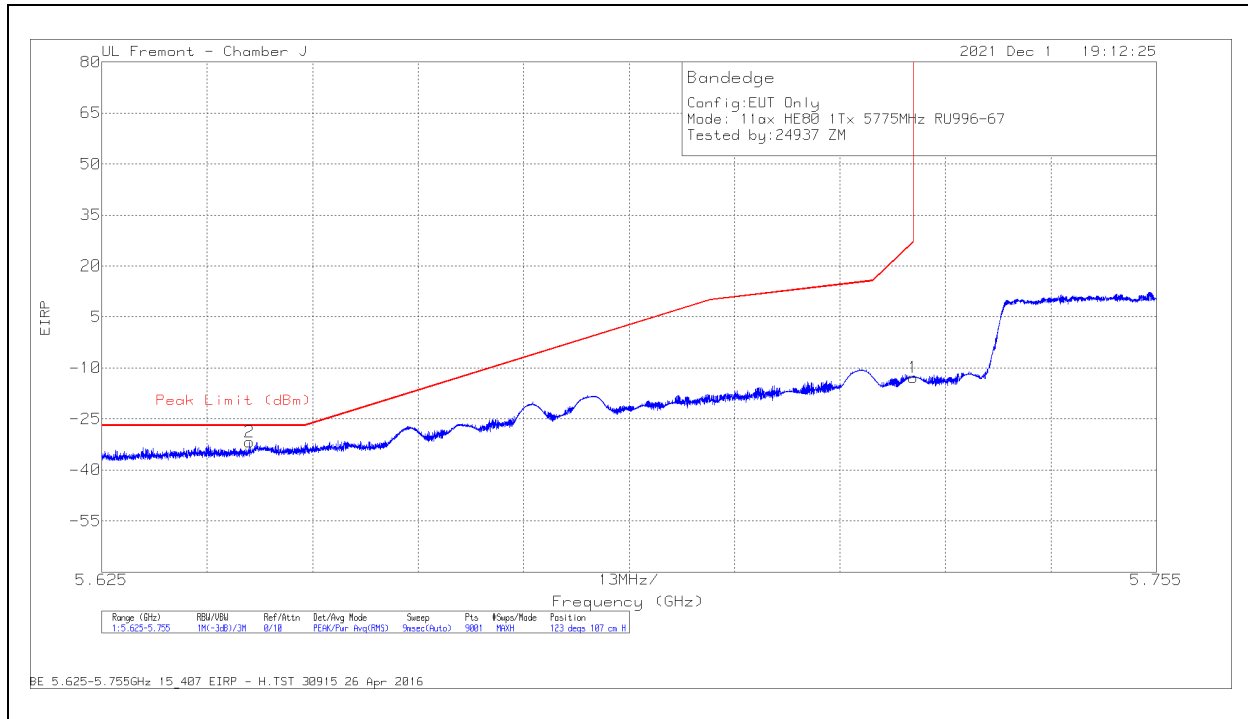
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Filr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-46.4	Pk	35.1	-22.5	11.8	-22	27	-49	121	130	H
2	5.94015	-62.86	Pk	35.1	-22.3	11.8	-38.26	-27	-11.26	121	130	H

Pk - Peak detector

VERTICAL RESULT

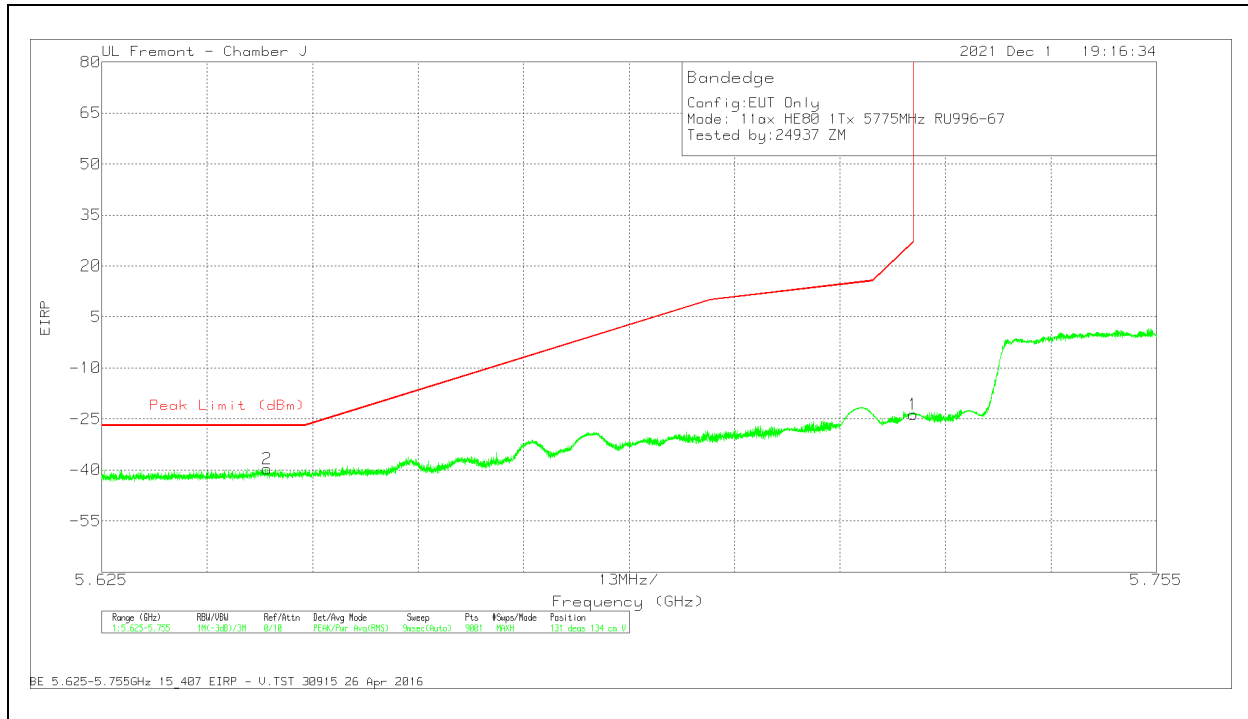
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-56.22	Pk	35.1	-22.5	11.8	-31.82	27	-58.82	125	154	V
2	5.9746	-64.3	Pk	35.1	-22.3	11.8	-39.7	-27	-12.7	125	154	V

Pk - Peak detector

1TX Antenna 3 MODE: 996-Tones, RU Index 67**BANDEDGE (CHANNEL 155 LOW EDGE)****HORIZONTAL RESULT**

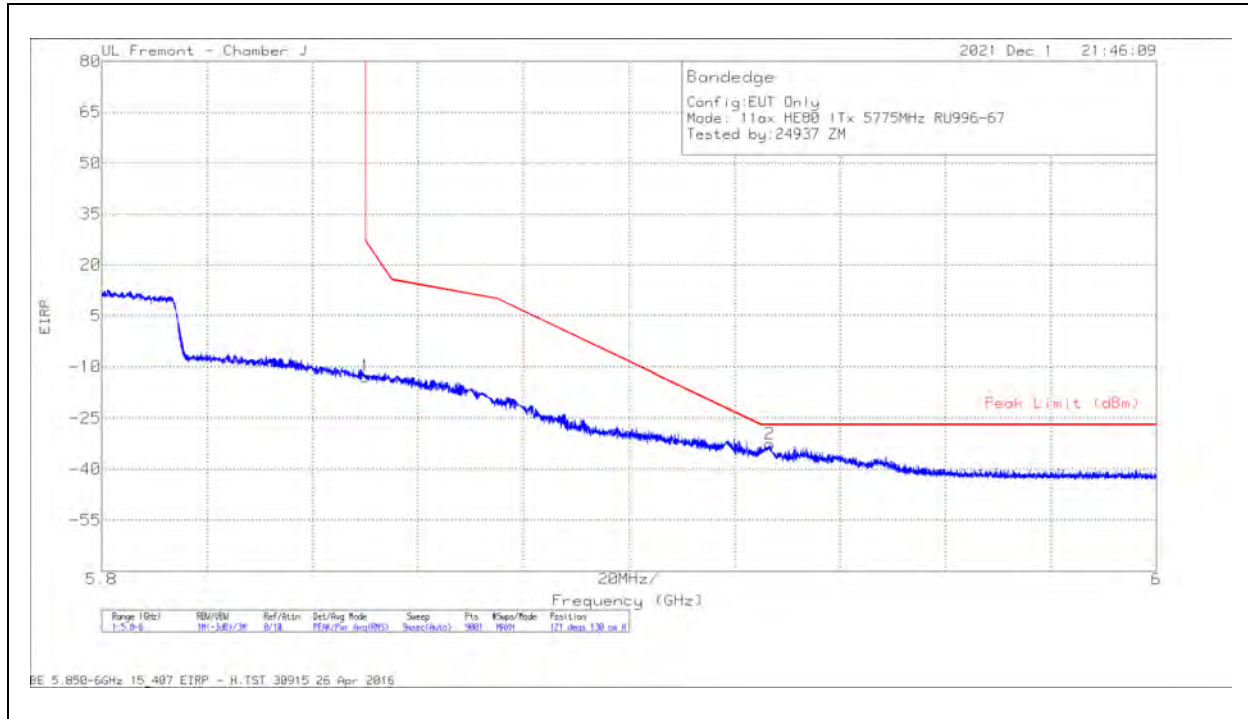
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-36.25	Pk	34.6	-22.9	11.8	0	-12.75	27	-39.75	123	107	H
2	5.64326	-55.07	Pk	34.5	-23	11.8	0	-31.77	-27	-4.77	123	107	H

Pk - Peak detector

VERTICAL RESULT

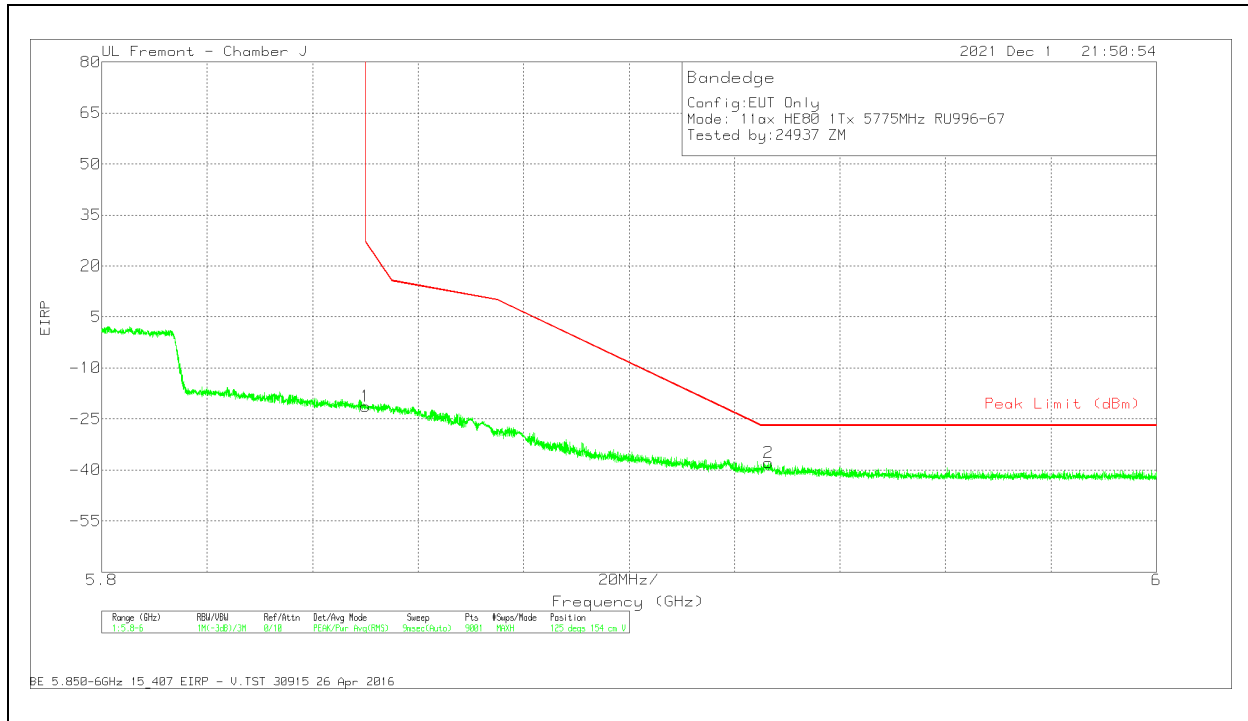
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-47.1	Pk	34.6	-22.9	11.8	0	-23.6	27	-50.6	131	134	V
2	5.64541	-62.97	Pk	34.5	-23	11.8	0	-39.67	-27	-12.67	131	134	V

Pk - Peak detector

BANDEDGE (CHANNEL 155 HIGH EDGE)**HORIZONTAL RESULT**

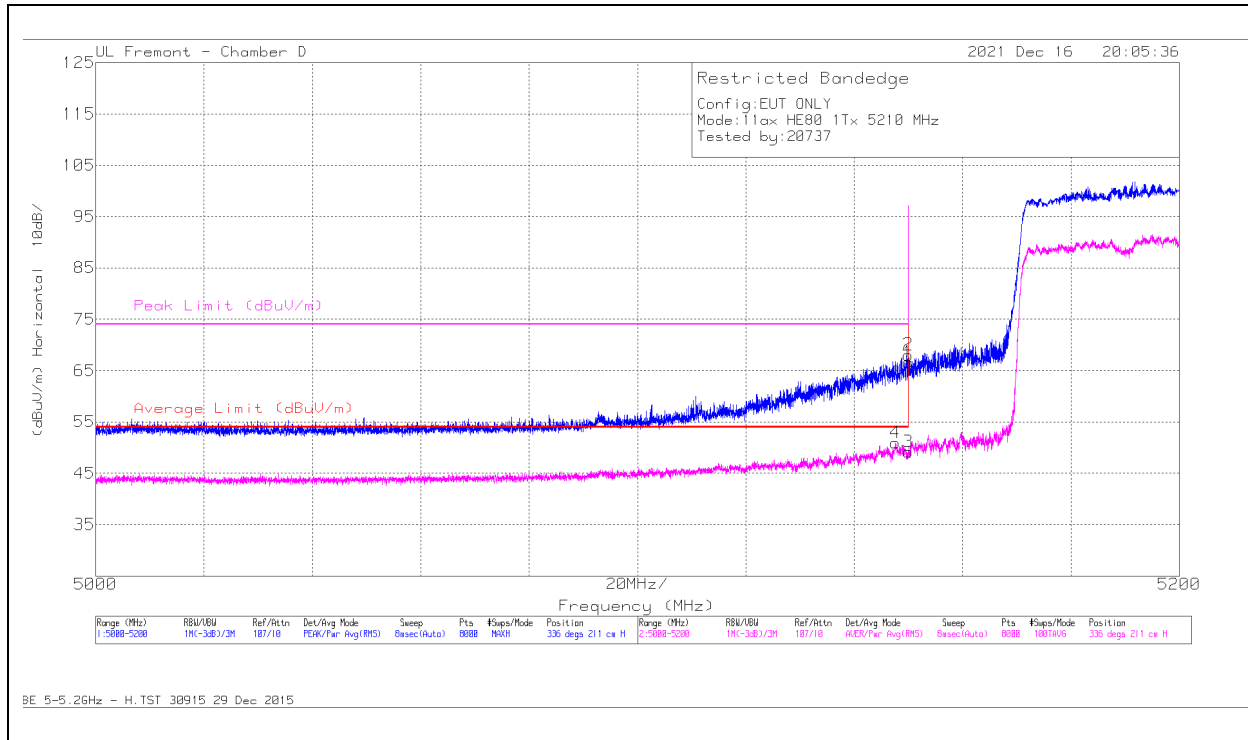
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Filt/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-37.11	Pk	35.1	-22.5	11.8	0	-12.71	27	-39.71	121	130	H
2	5.92671	-57.07	Pk	35.1	-22.3	11.8	0	-32.47	-27	-5.47	121	130	H

Pk - Peak detector

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-45.74	Pk	35.1	-22.5	11.8	0	-21.34	27	-48.34	125	154	V
2	5.92644	-62.46	Pk	35.1	-22.3	11.8	0	-37.86	-27	-10.86	125	154	V

Pk - Peak detector

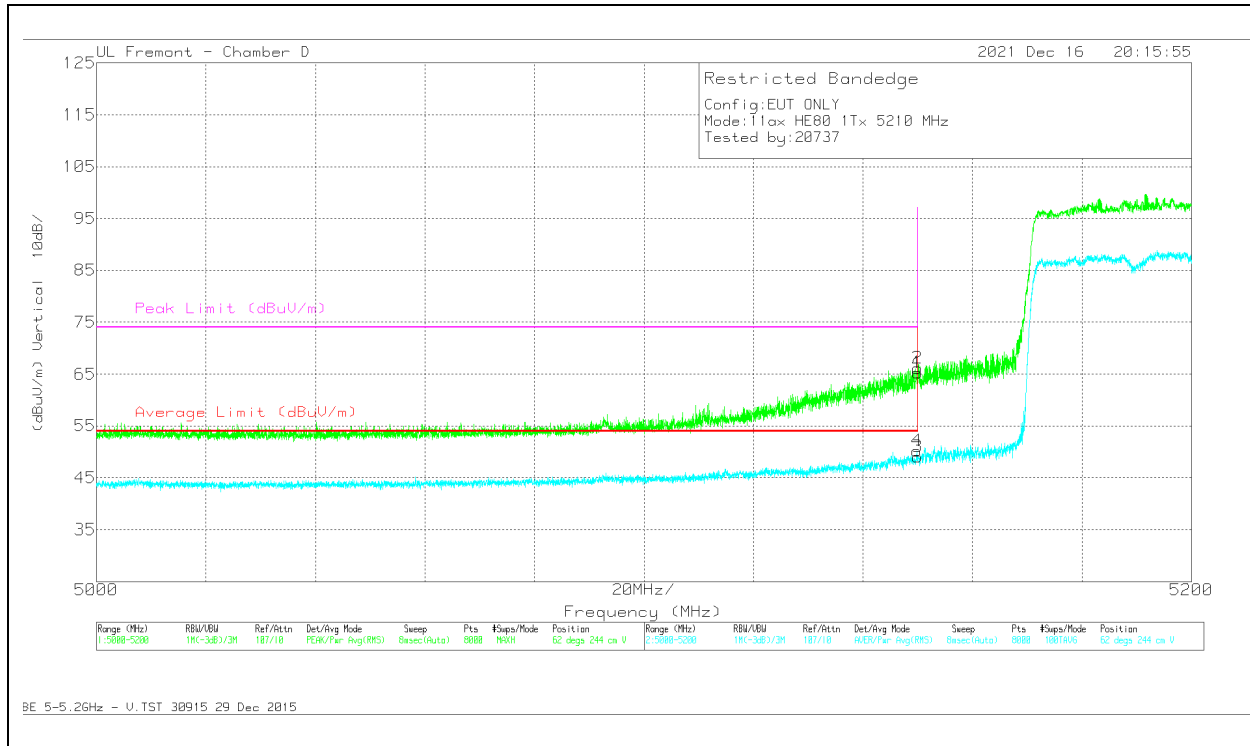
1TX Antenna 3 MODE: SU, Single User**BANDEDGE (CHANNEL 155 LOW EDGE)****HORIZONTAL RESULT**

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5150	50.68	Pk	34.2	-18.2	0	66.68	-	-	74	-7.32	336	211	H
2	* 5149.918	52.08	Pk	34.2	-18.2	0	68.08	-	-	74	-5.92	336	211	H
3	* 5150	32.23	RMS	34.2	-18.2	.99	49.22	54	-4.78	-	-	336	211	H
4	* 5147.568	33.99	RMS	34.1	-18.2	.99	50.88	54	-3.12	-	-	336	211	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5150	49.24	PK	34.2	-18.2	0	65.24	-	-	74	-8.76	62	244	V
2	* 5149.943	50.17	PK	34.2	-18.2	0	66.17	-	-	74	-7.83	62	244	V
3	* 5150	32.02	RMS	34.2	-18.2	.99	49.01	54	-4.99	-	-	62	244	V
4	* 5149.793	33.21	RMS	34.2	-18.2	.99	50.2	54	-3.8	-	-	62	244	V

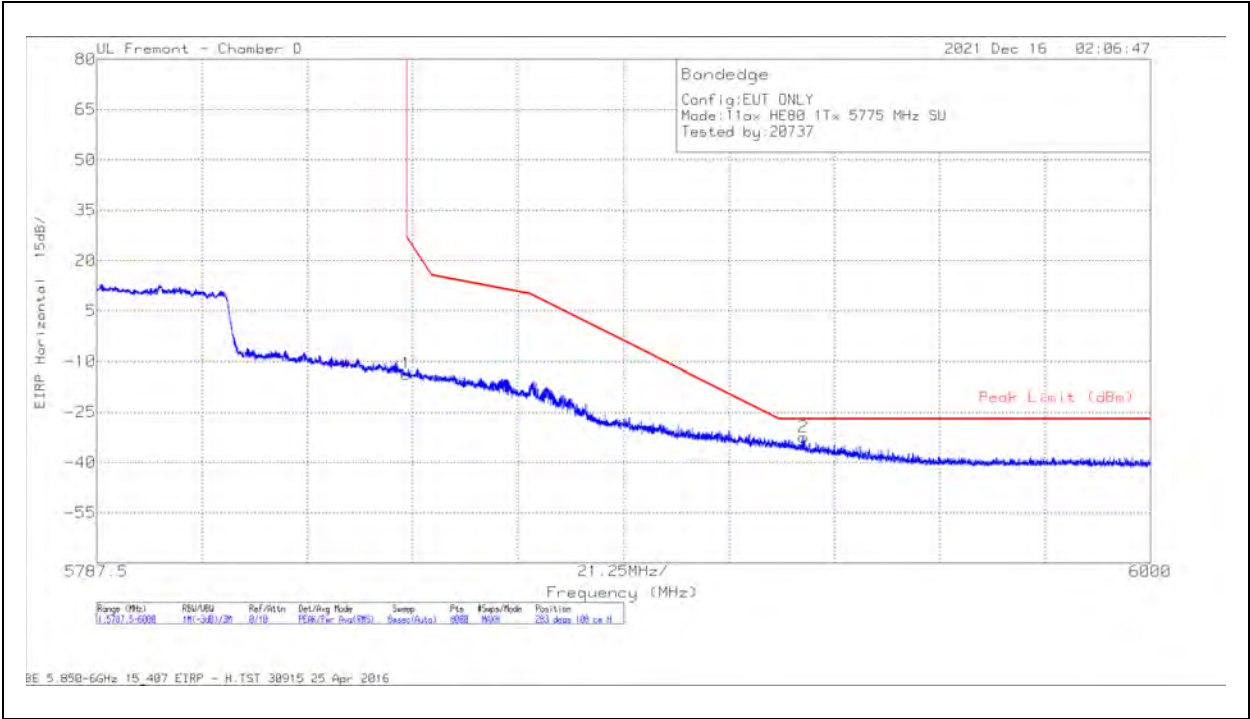
* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

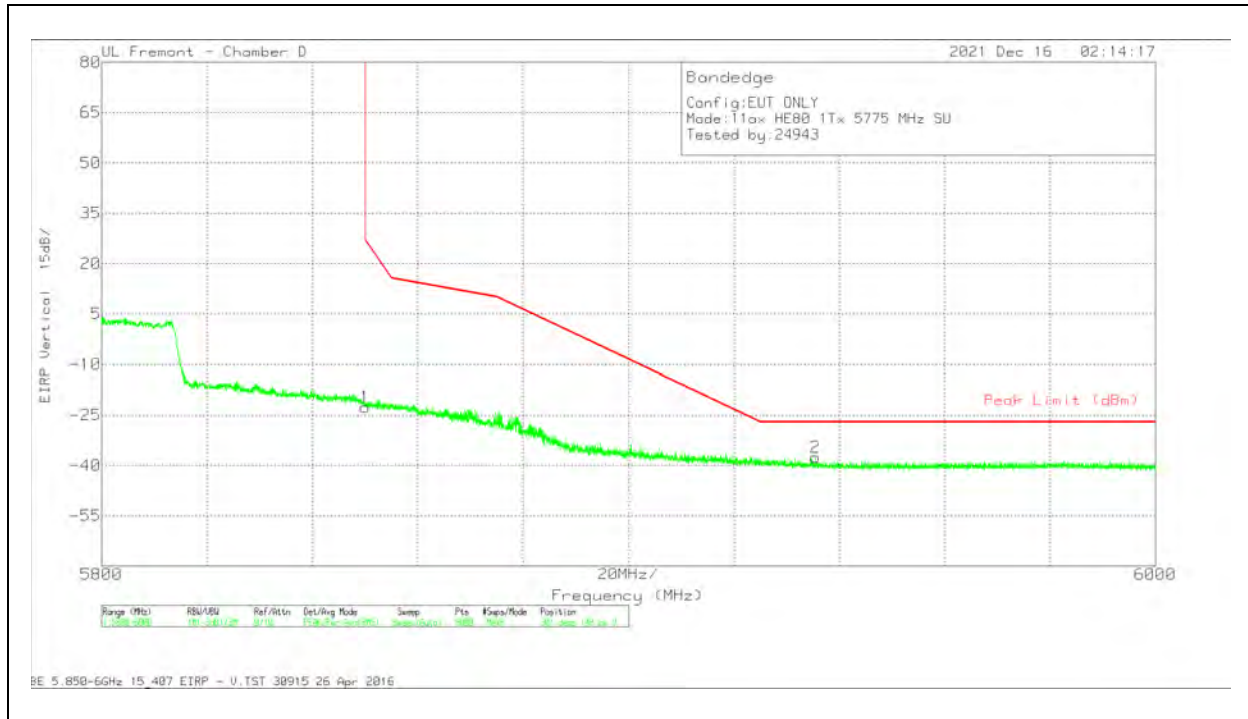
BANDEGE (CHANNEL 155 HIGH EDGE)

HORIZONTAL RESULT



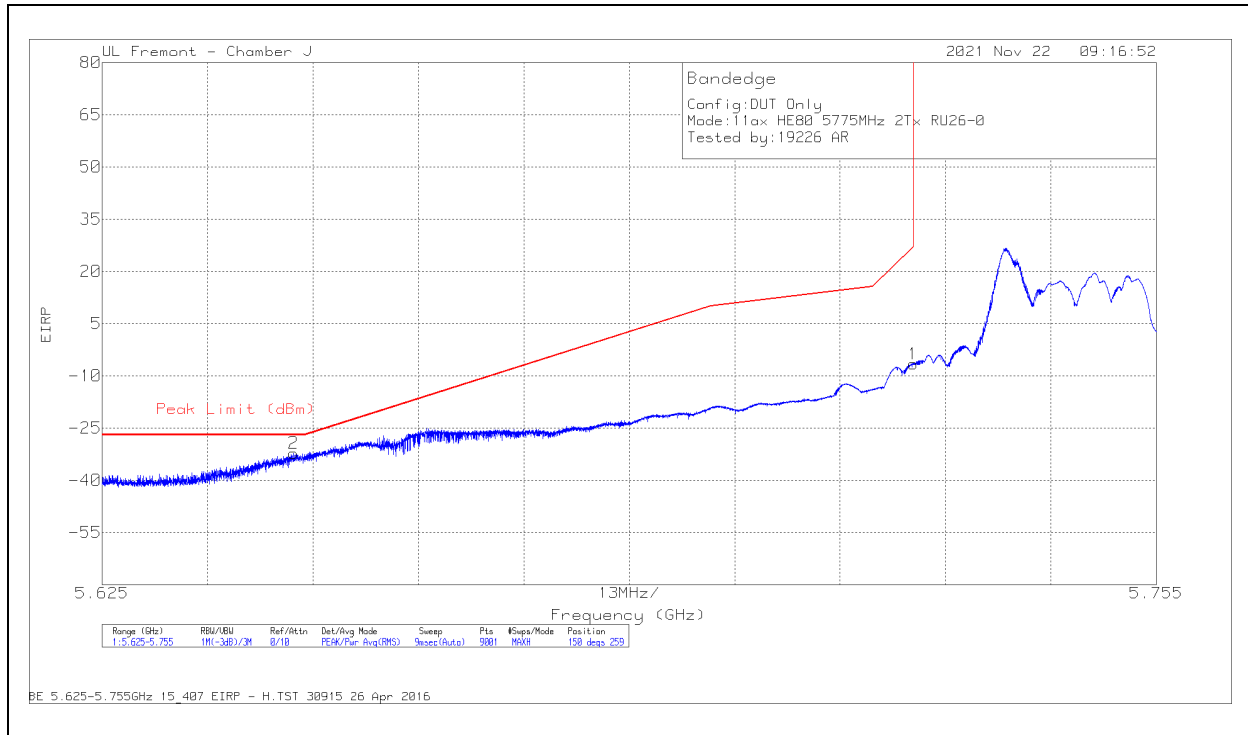
Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-42.52	Pk	34.8	-17.8	11.8	0	-13.72	27	-40.72	283	108	H
2	5930.053	-61.59	Pk	35	-17.6	11.8	0	-32.39	-27	-5.39	283	108	H

Pk - Peak detector

VERTICAL RESULT

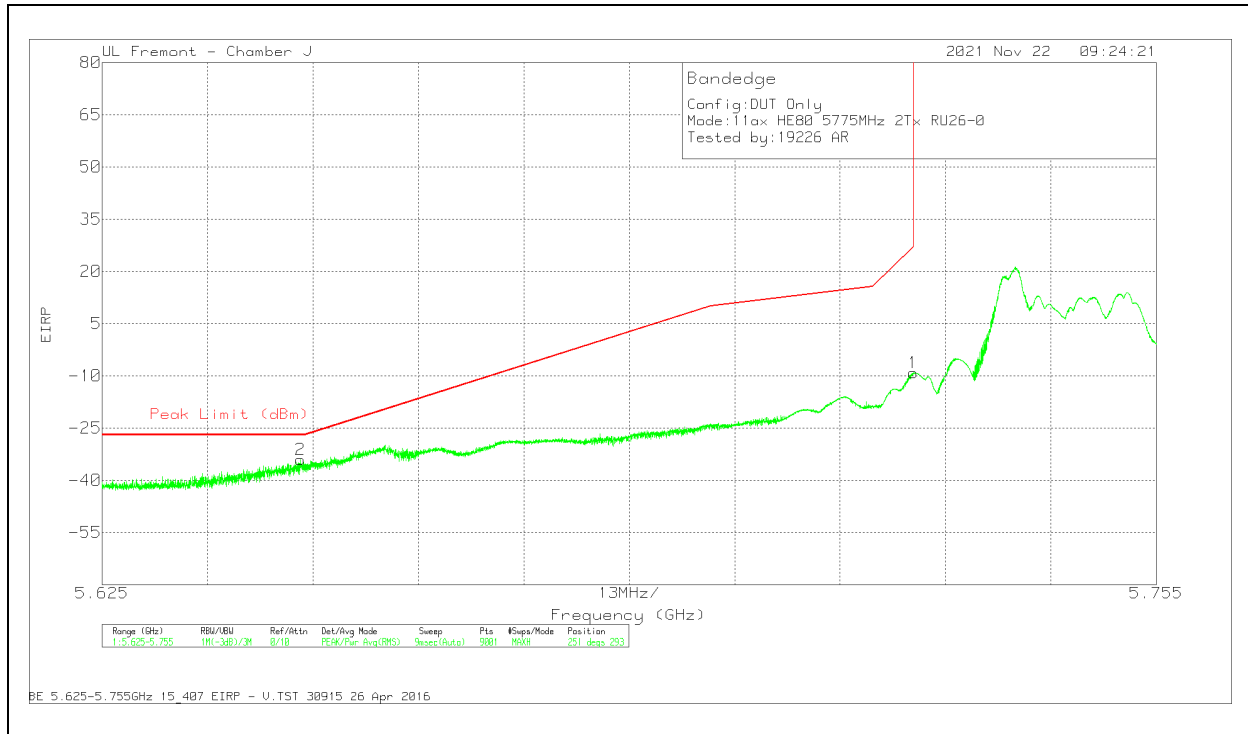
Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-51.42	Pk	34.8	-17.8	11.8	0	-22.62	27	-49.62	301	148	V
2	5935.516	-66.67	Pk	35	-17.7	11.8	0	-37.57	-27	-10.57	301	148	V

Pk - Peak detector

2TX Antenna 6 + Antenna 3 OFDMA MODE: 26-Tones, RU Index 0**BANDEDGE (CHANNEL 155 LOW EDGE)****HORIZONTAL RESULT**

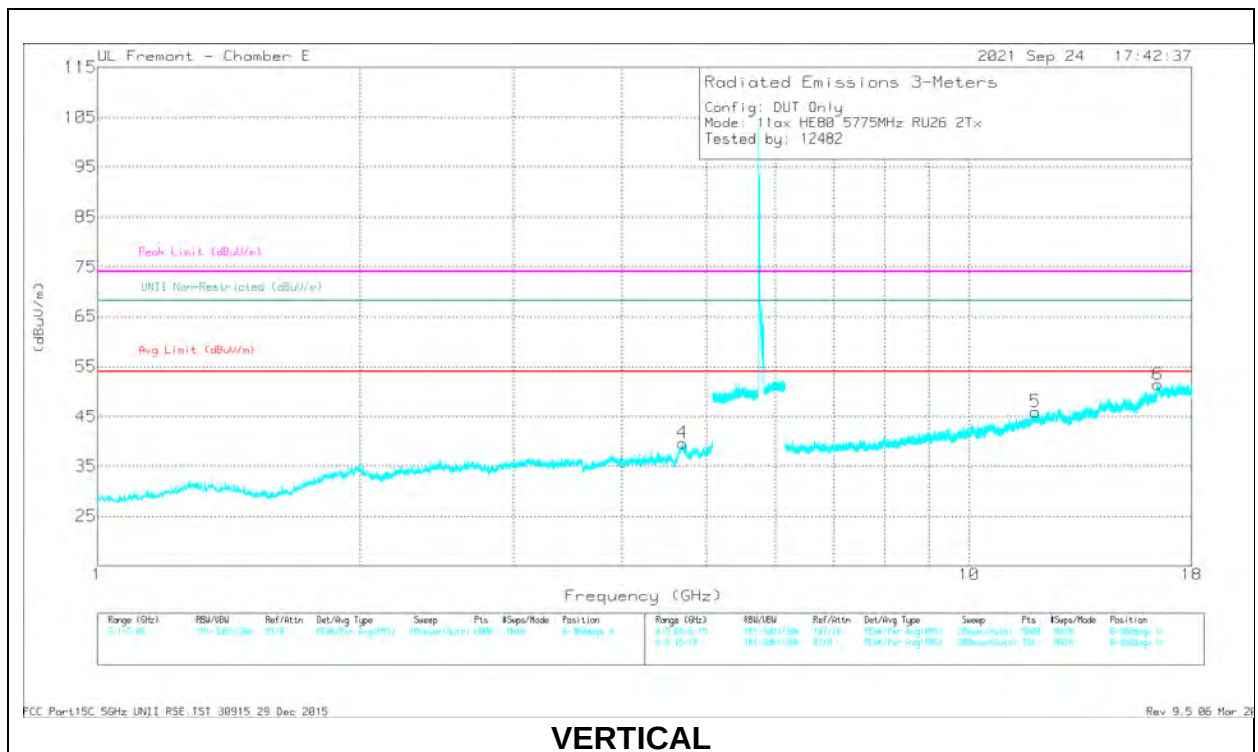
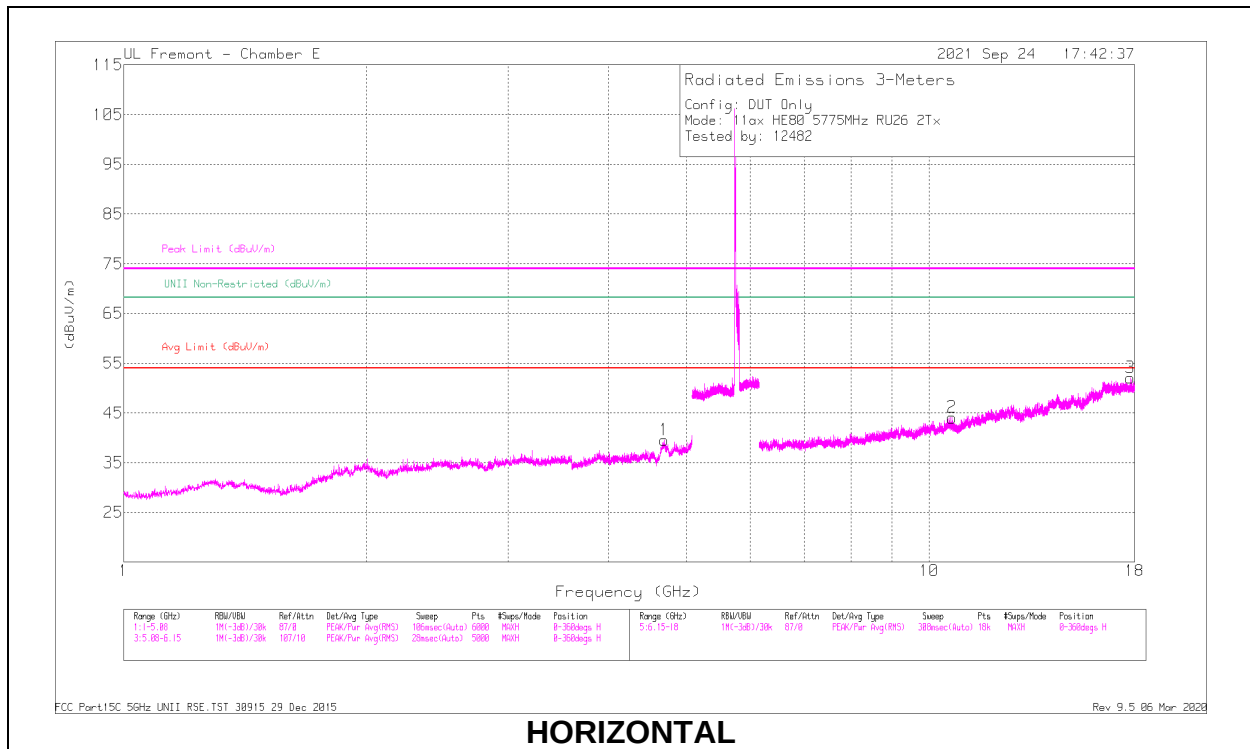
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-30.1	Pk	34.6	-22.9	11.8	-6.6	27	-33.6	150	259	H
2	5.6486	-55.54	Pk	34.5	-23	11.8	-32.24	-27	-5.24	150	259	H

Pk - Peak detector

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-32.65	Pk	34.6	-22.9	11.8	-9.15	27	-36.15	251	293	V
2	5.64945	-57.37	Pk	34.5	-23	11.8	-34.07	-27	-7.07	251	293	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS**MID CHANNEL RESULTS**

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF PRE0078107 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.68798	40.33	PK-U	34.4	-30	0	44.73	-	-	74	-29.27	-	-	111	199	H
	* 4.68693	27.83	ADR	34.4	-30	.23	32.46	54	-21.54	-	-	-	-	111	199	H
4	* 4.68855	40.61	PK-U	34.4	-30	0	45.01	-	-	74	-28.99	-	-	87	156	V
	* 4.68854	28.41	ADR	34.4	-30	.23	33.04	54	-20.96	-	-	-	-	87	156	V
2	* 10.6839	37.36	PK-U	37.7	-24.7	0	50.36	-	-	74	-23.64	-	-	260	362	H
	* 10.6860	25.21	ADR	37.7	-24.7	.23	38.44	54	-15.56	-	-	-	-	260	362	H
3	* 17.7726	34.83	PK-U	41.5	-18.5	0	57.83	-	-	74	-16.17	-	-	98	247	H
	* 17.7728	23.91	ADR	41.5	-18.5	.23	47.14	54	-6.86	-	-	-	-	98	247	H
5	* 11.9151	34.52	PK-U	38.8	-22.1	0	51.22	-	-	74	-22.78	-	-	235	172	V
	* 11.9155	23.75	ADR	38.8	-22.1	.23	40.68	54	-13.32	-	-	-	-	235	172	V
6	16.46955	34.88	PK-U	41.5	-18.3	0	58.08	-	-	-	-	68.2	-10.12	332	255	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

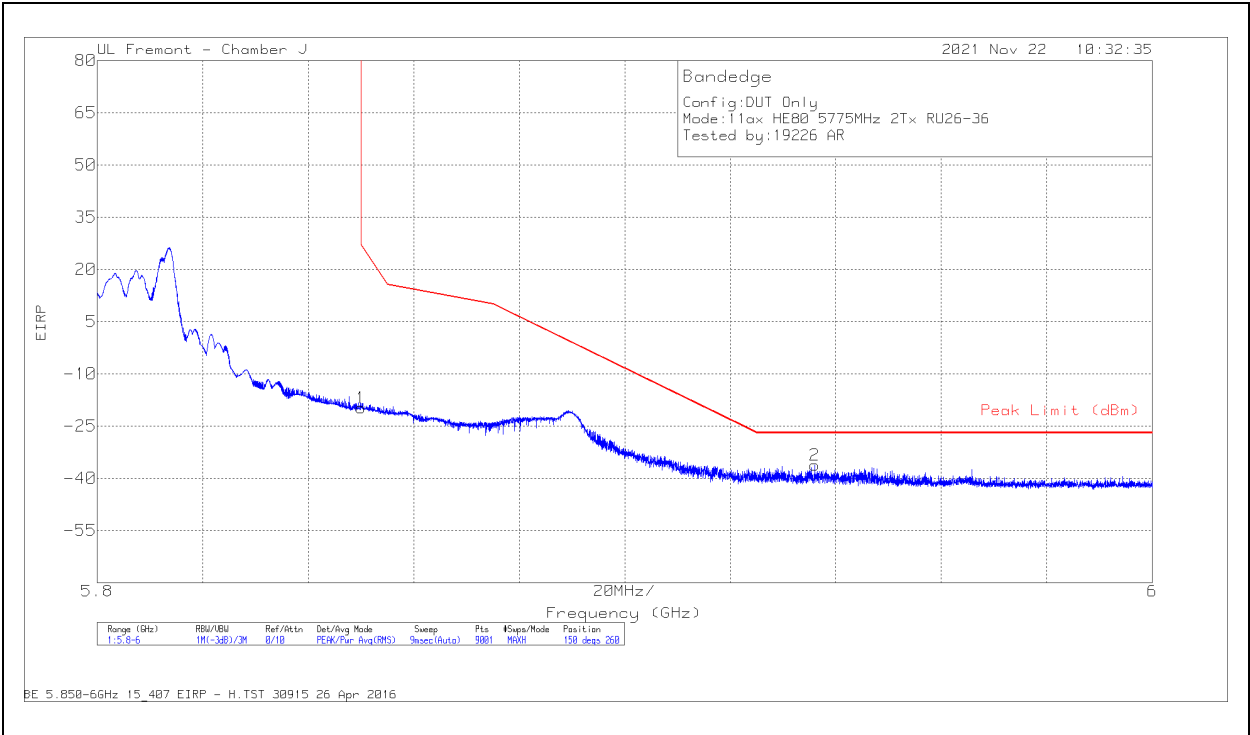
PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 6 + Antenna 3 OFDMA MODE: 26-Tones, RU Index 36

BANDEDGE (CHANNEL 155 HIGH EDGE)

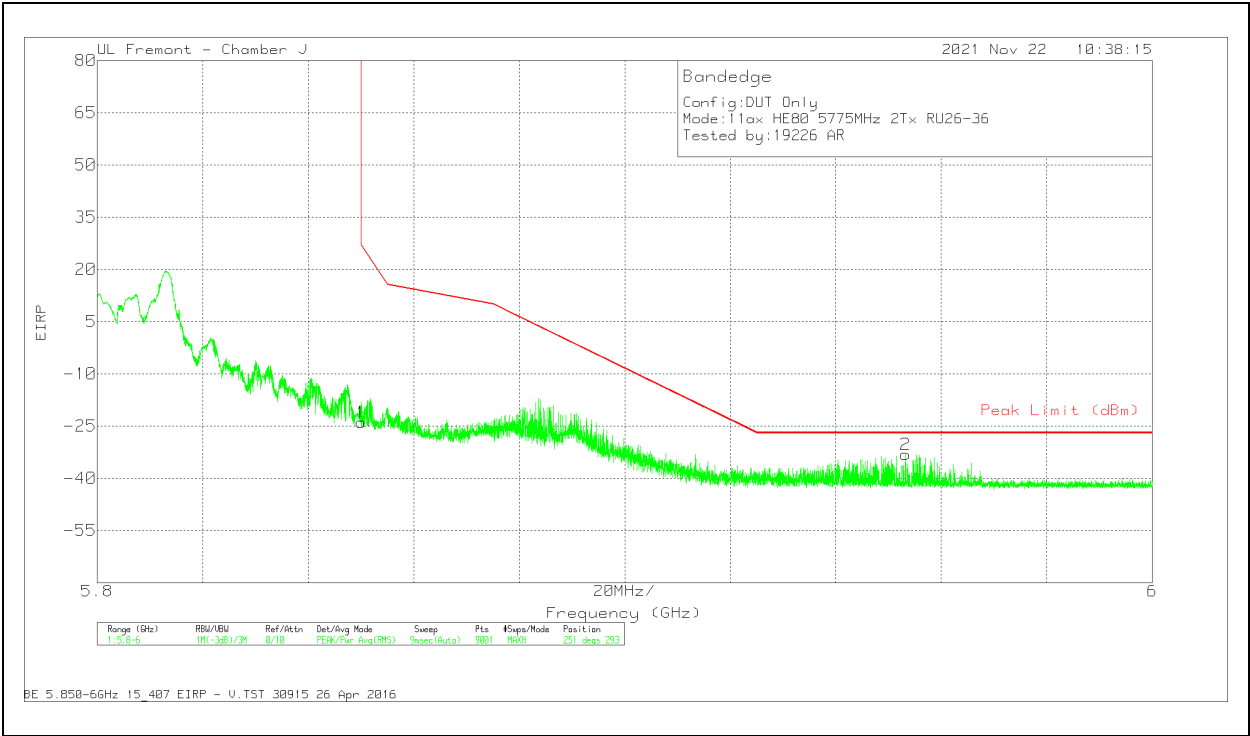
HORIZONTAL RESULT



Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-44.18	Pk	35.1	-22.5	11.8	-19.78	27	-46.78	150	260	H
2	5.936	-60.87	Pk	35.1	-22.3	11.8	-36.27	-27	-9.27	150	260	H

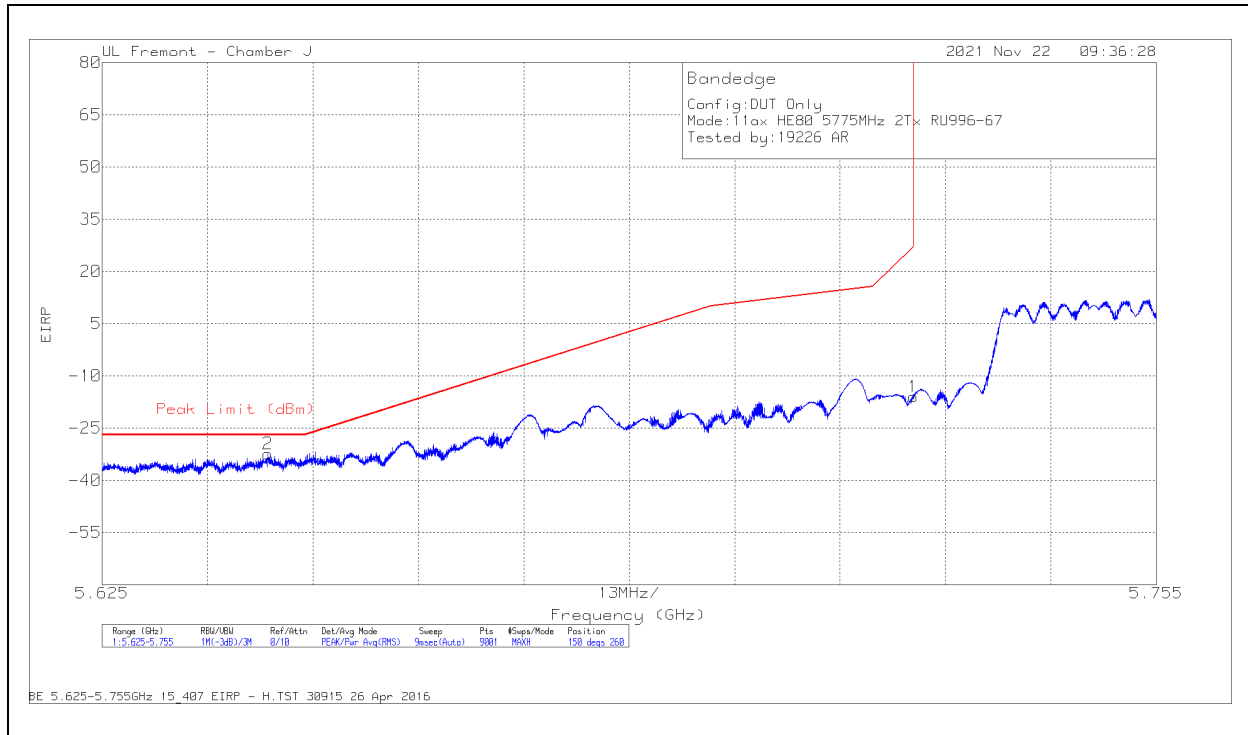
Pk - Peak detector

VERTICAL RESULT



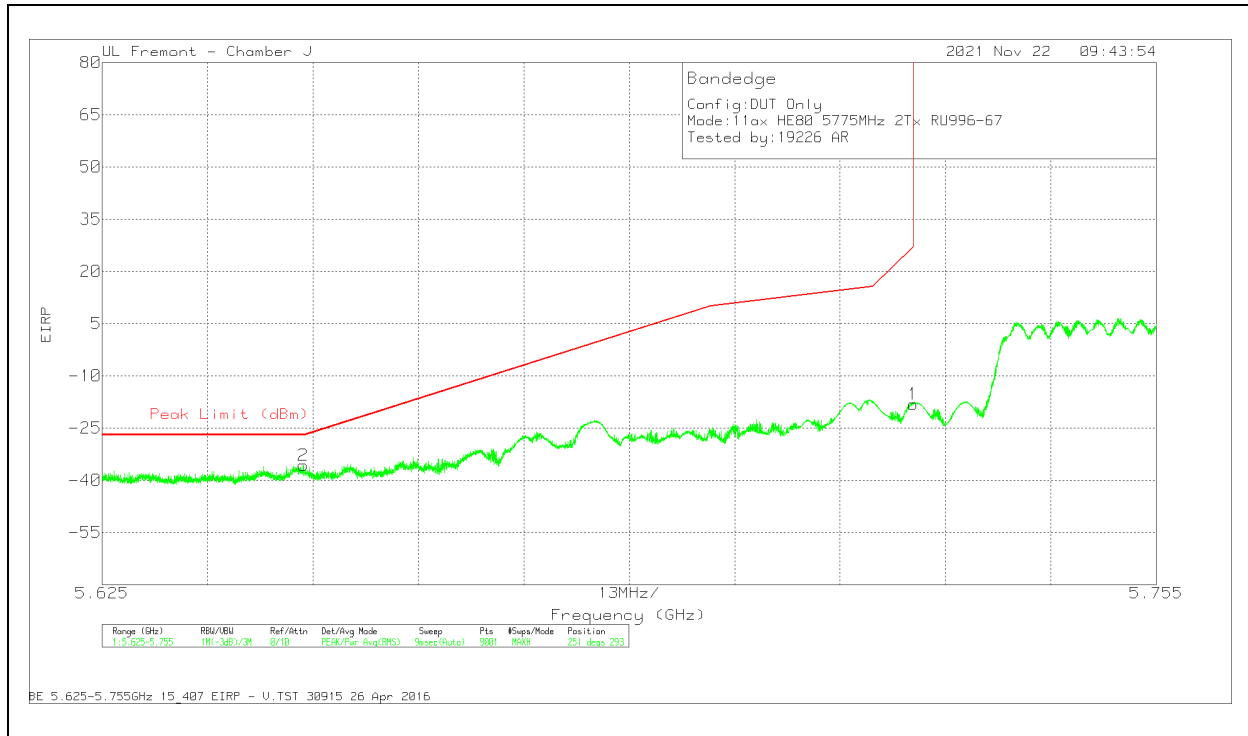
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Ampl/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-48.37	Pk	35.1	-22.5	11.8	-23.97	27	-50.97	251	293	V
2	5.95322	-57.76	Pk	35.1	-22.3	11.8	-33.16	-27	-6.16	251	293	V

Pk - Peak detector

2TX Antenna 6 + Antenna 3 OFDMA MODE: 996-Tones, RU Index 67**BANDEDGE (CHANNEL 155 LOW EDGE)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-39.49	Pk	34.6	-22.9	11.8	-15.99	27	-42.99	150	260	H
2	5.64542	-55.71	Pk	34.5	-23	11.8	-32.41	-27	-5.41	150	260	H

Pk - Peak detector

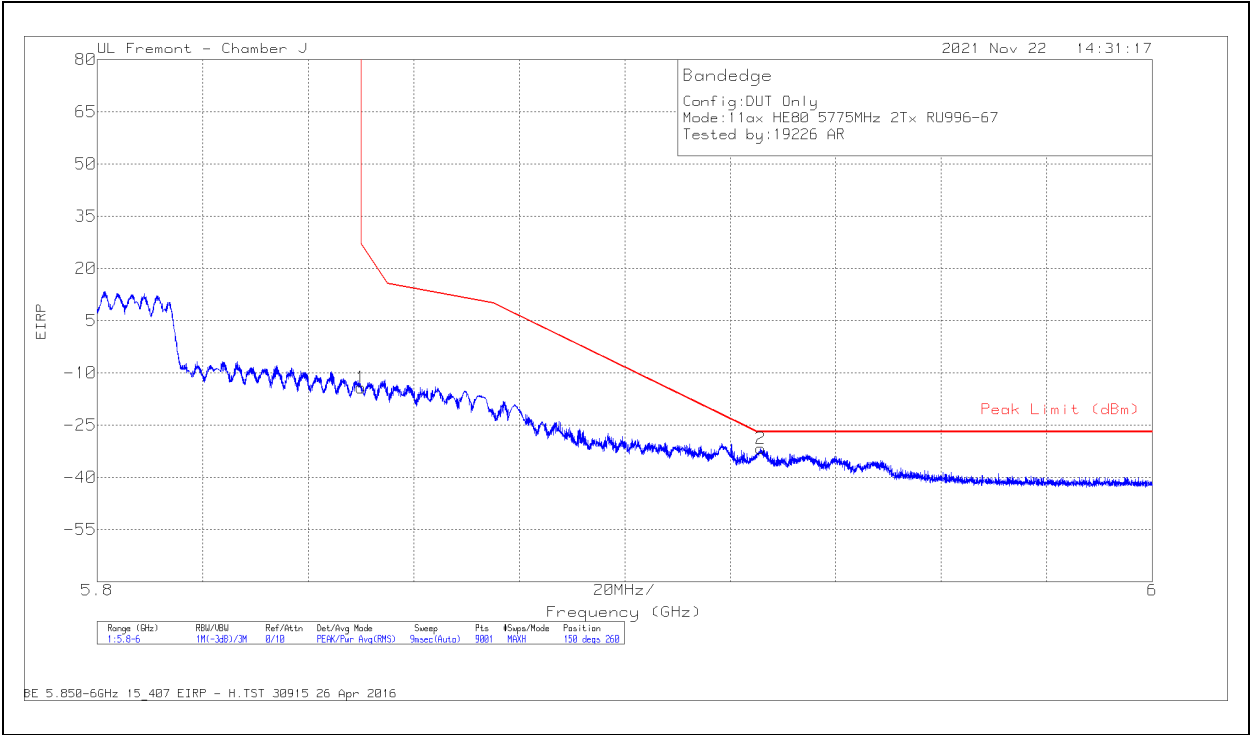
VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-41.65	Pk	34.6	-22.9	11.8	-18.15	27	-45.15	251	293	V
2	5.6498	-59.03	Pk	34.5	-23	11.8	-35.73	-27	-8.73	251	293	V

Pk - Peak detector

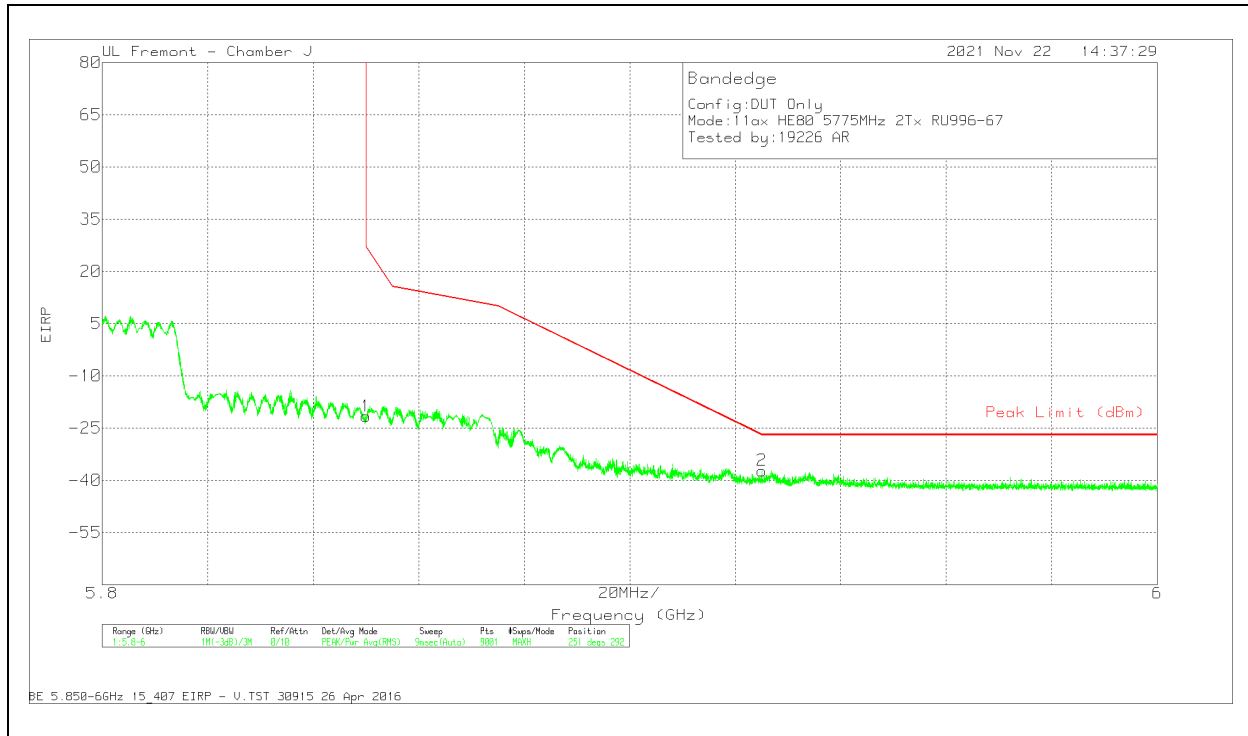
BANDEDGE (CHANNEL 155 HIGH EDGE)

HORIZONTAL RESULT



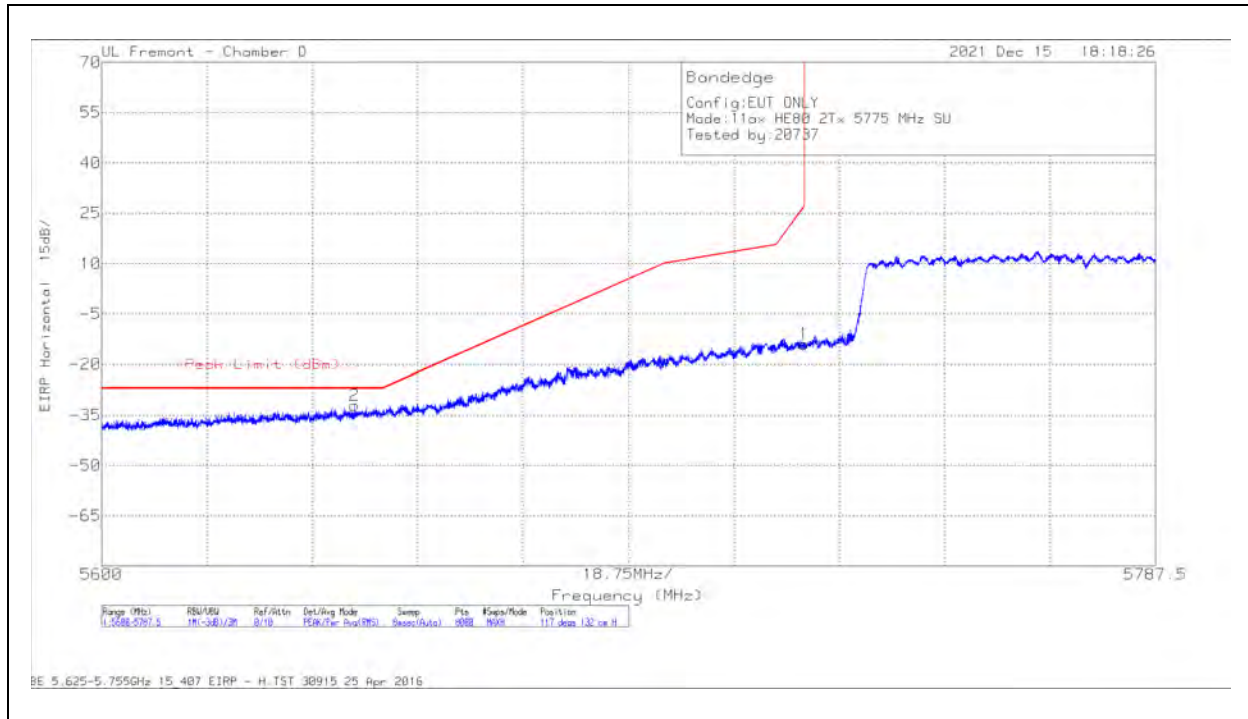
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-38.63	Pk	35.1	-22.5	11.8	-14.23	27	-41.23	150	260	H
2	5.9258	-56.32	Pk	35.1	-22.3	11.8	-31.72	-27	-4.72	150	260	H

Pk - Peak detector

VERTICAL RESULT

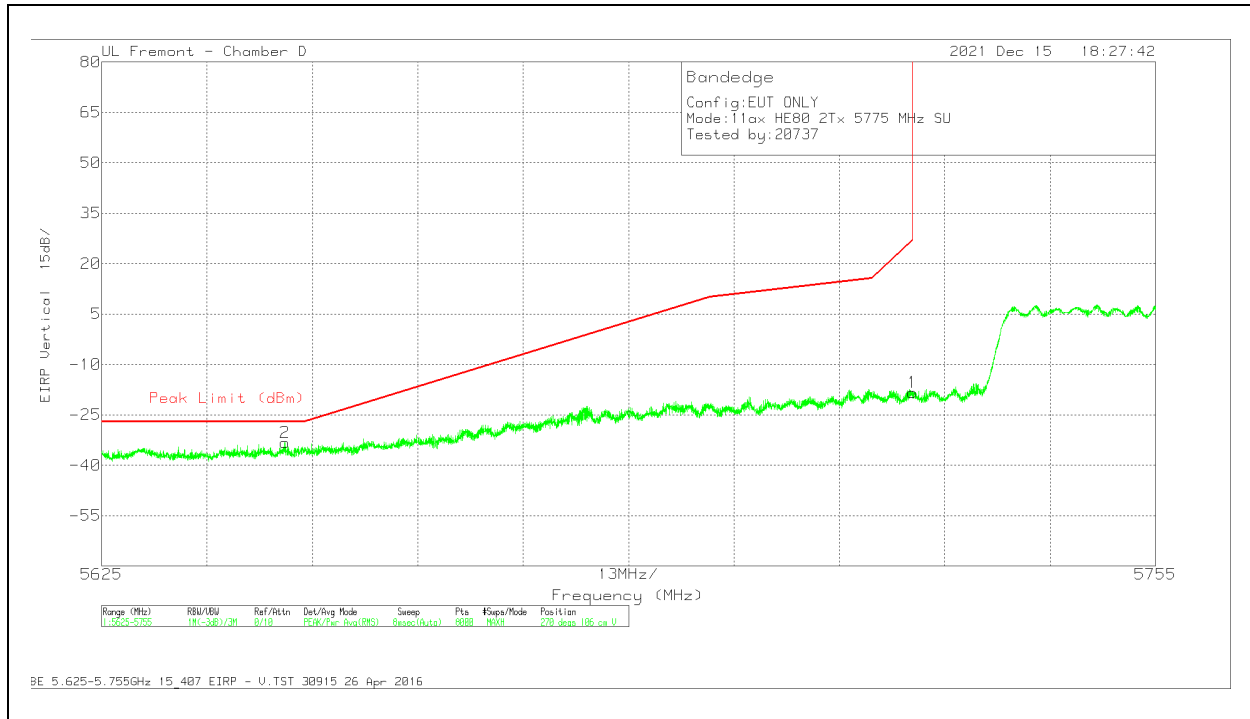
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 206806 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-46.01	Pk	35.1	-22.5	11.8	-21.61	27	-48.61	251	292	V
2	5.92507	-61.83	Pk	35.1	-22.3	11.8	-37.23	-27	-10.23	251	292	V

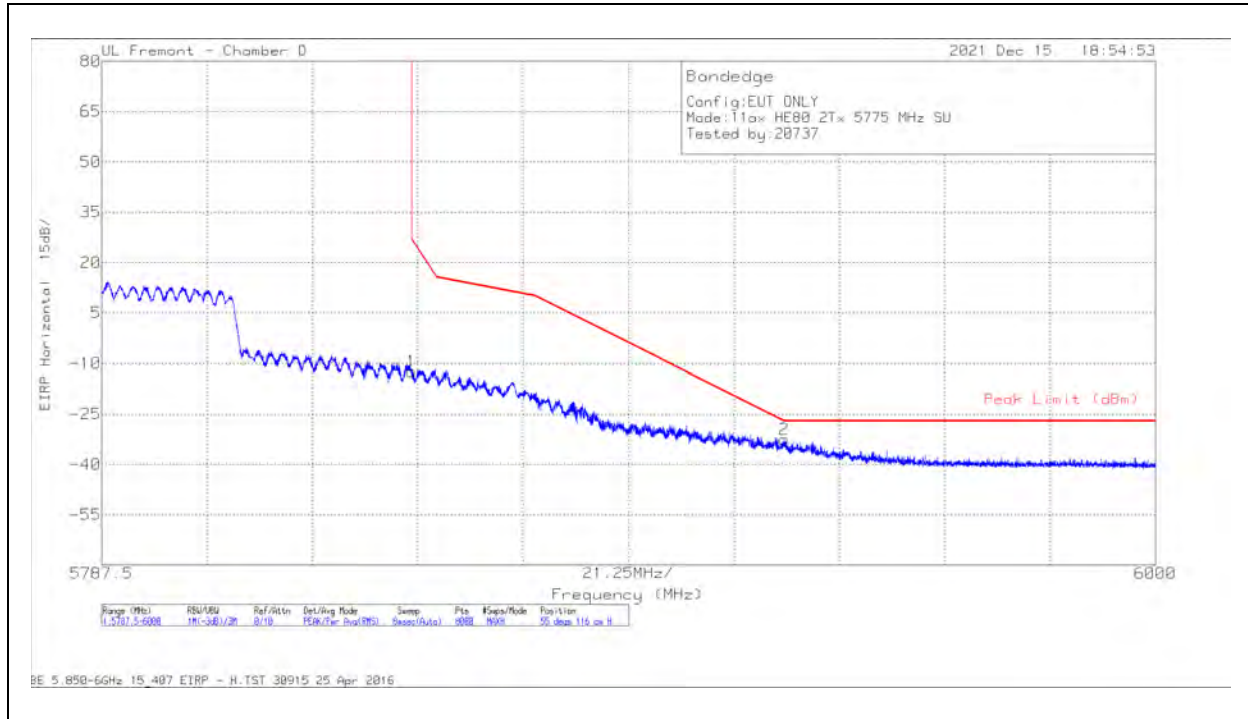
Pk - Peak detector

2TX Antenna 6 + Antenna 3 OFDMA MODE: SU, Single User**BANDEDGE (CHANNEL 155 LOW EDGE)****HORIZONTAL RESULT**

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5645.005	-60.93	Pk	34.7	-17.6	11.8	0	-32.03	-27	-5.03	117	132	H
1	5725	-42.49	Pk	34.6	-17.8	11.8	0	-13.89	27	-40.89	117	132	H

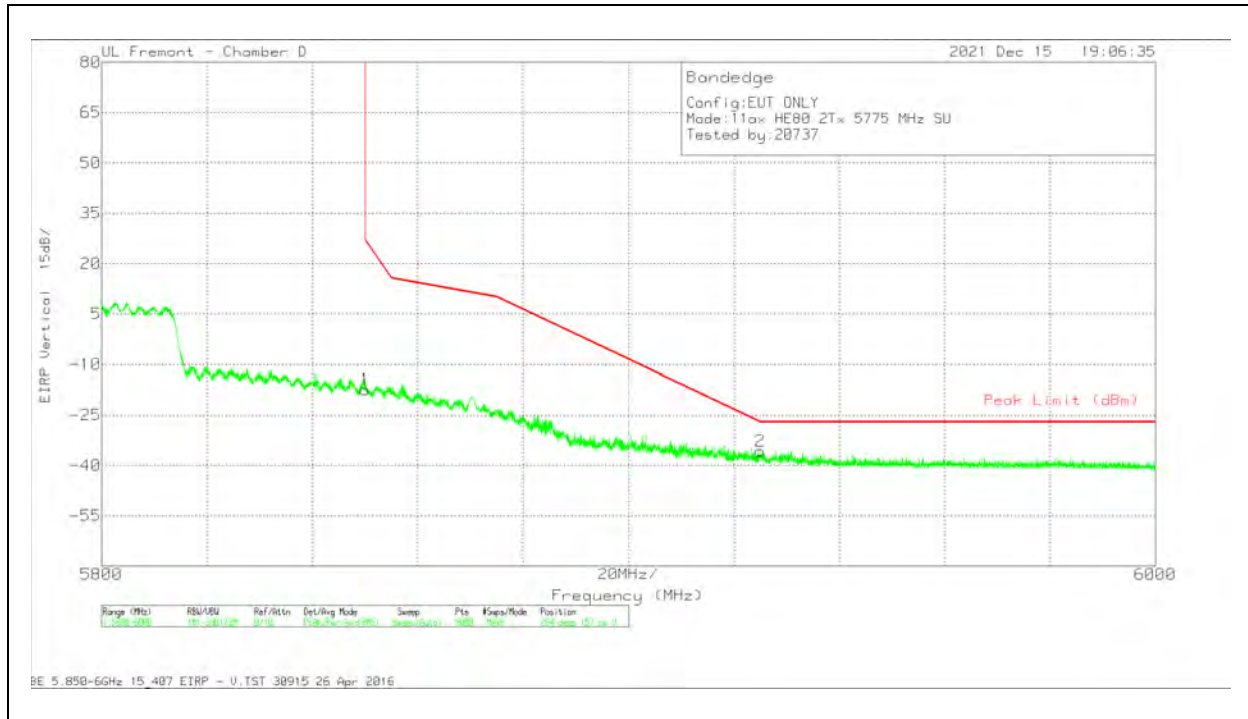
Pk - Peak detector

VERTICAL RESULT**TRACE MARKER**

BANDEGE (CHANNEL 155 HIGH EDGE)**HORIZONTAL RESULT**

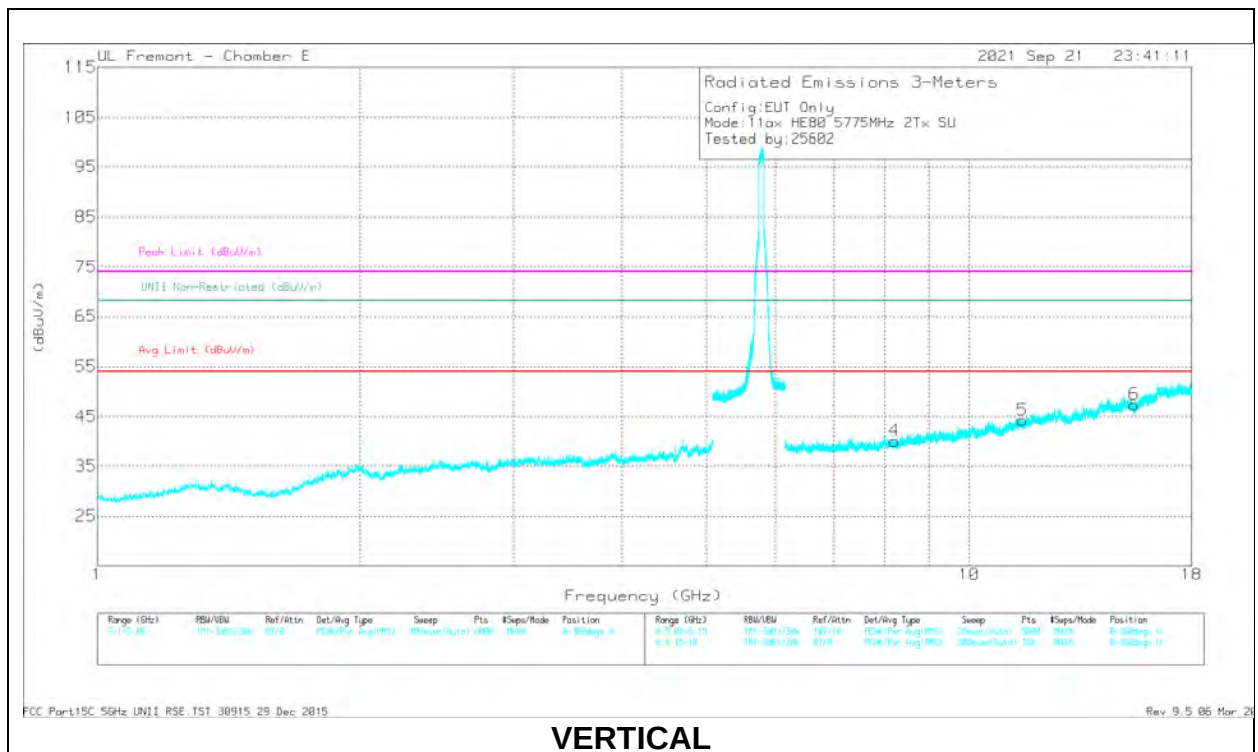
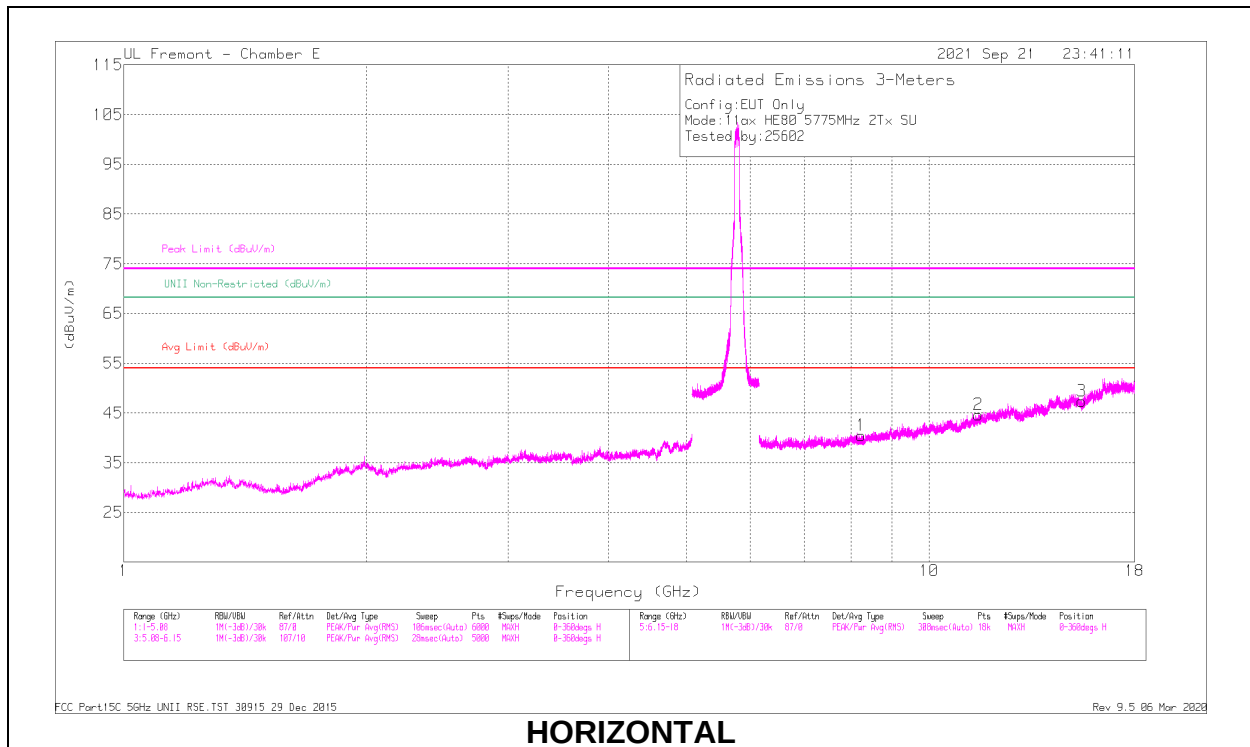
Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-41.12	Pk	34.8	-17.8	11.8	0	-12.32	27	-39.32	55	116	H
2	5925.112	-61.79	Pk	35	-17.5	11.8	0	-32.49	-27	-5.49	55	116	H

Pk - Peak detector

VERTICAL RESULT

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-46.24	Pk	34.8	-17.8	11.8	0	-17.44	27	-44.44	264	157	V
2	5924.99	-64.98	Pk	35	-17.5	11.8	0	-35.68	-26.99	-8.69	264	157	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS**MID CHANNEL RESULTS**

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF PRE0078107 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 8.2387	37.48	PK-U	35.9	-26.4	0	46.98	-	-	74	-27.02	0	200	H
	* 8.23777	26.2	ADR	35.9	-26.4	.23	35.93	54	-18.07	-	-	0	200	H
2	* 11.51918	35.21	PK-U	38.2	-22.5	0	50.91	-	-	74	-23.09	0	200	H
	* 11.51852	24.58	ADR	38.2	-22.6	.23	40.41	54	-13.59	-	-	0	200	H
3	* 15.47593	34.2	PK-U	40.2	-20.6	0	53.8	-	-	74	-20.2	357	321	H
	* 15.47761	22.98	ADR	40.2	-20.5	.23	42.91	54	-11.09	-	-	357	321	H
4	* 8.21595	38.19	PK-U	35.8	-26.5	0	47.49	-	-	74	-26.51	357	200	V
	* 8.21736	26.32	ADR	35.8	-26.5	.23	35.85	54	-18.15	-	-	357	200	V
5	* 11.51528	36.17	PK-U	38.2	-22.6	0	51.77	-	-	74	-22.23	212	143	V
	* 11.51514	23.79	ADR	38.2	-22.6	.23	39.62	54	-14.38	-	-	212	143	V
6	* 15.47189	34.46	PK-U	40.2	-20.6	0	54.06	-	-	74	-19.94	212	101	V
	* 15.47131	23.57	ADR	40.2	-20.6	.23	43.4	54	-10.6	-	-	212	101	V

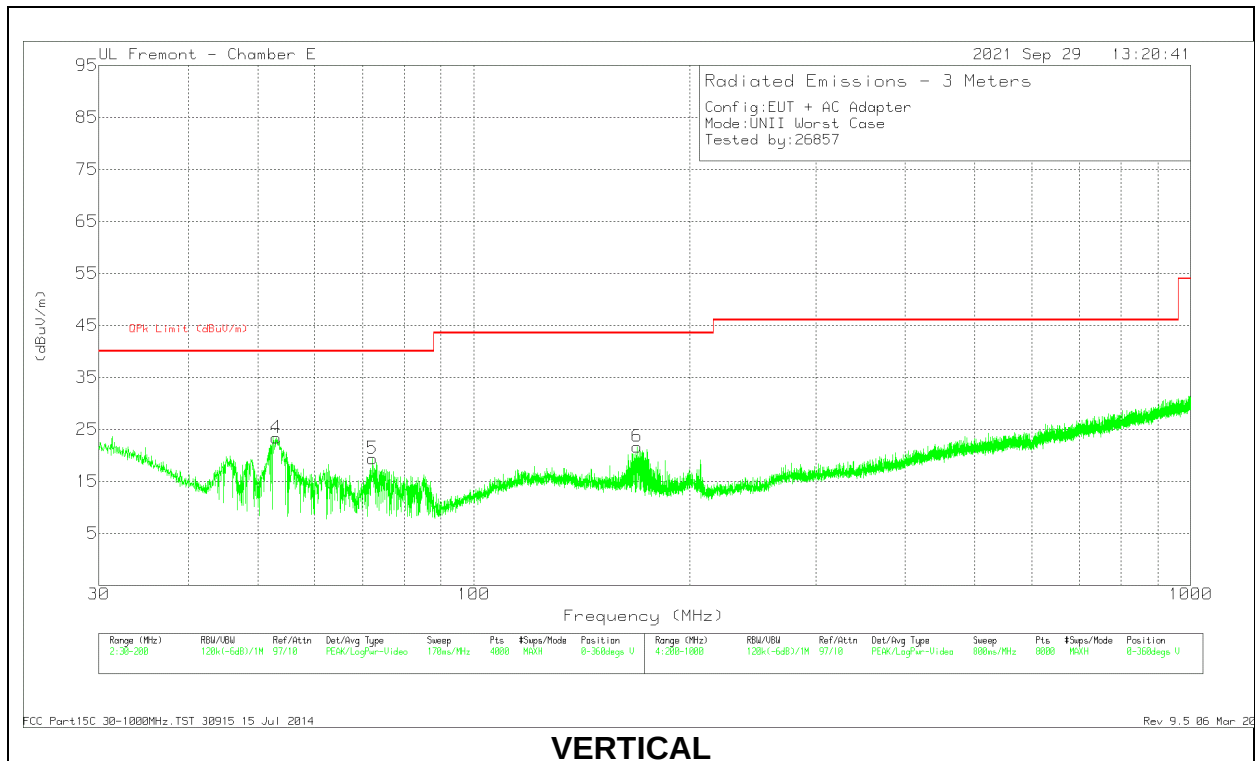
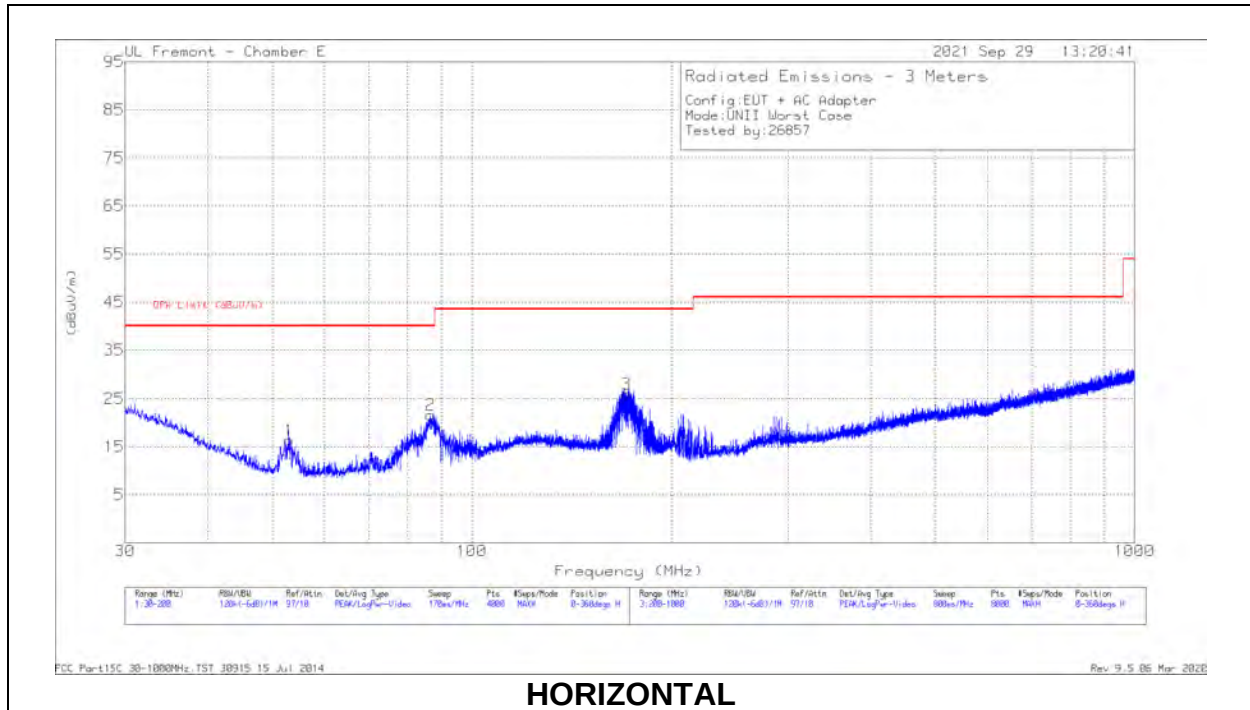
* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.2. WORST CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)



Below 1GHz Data

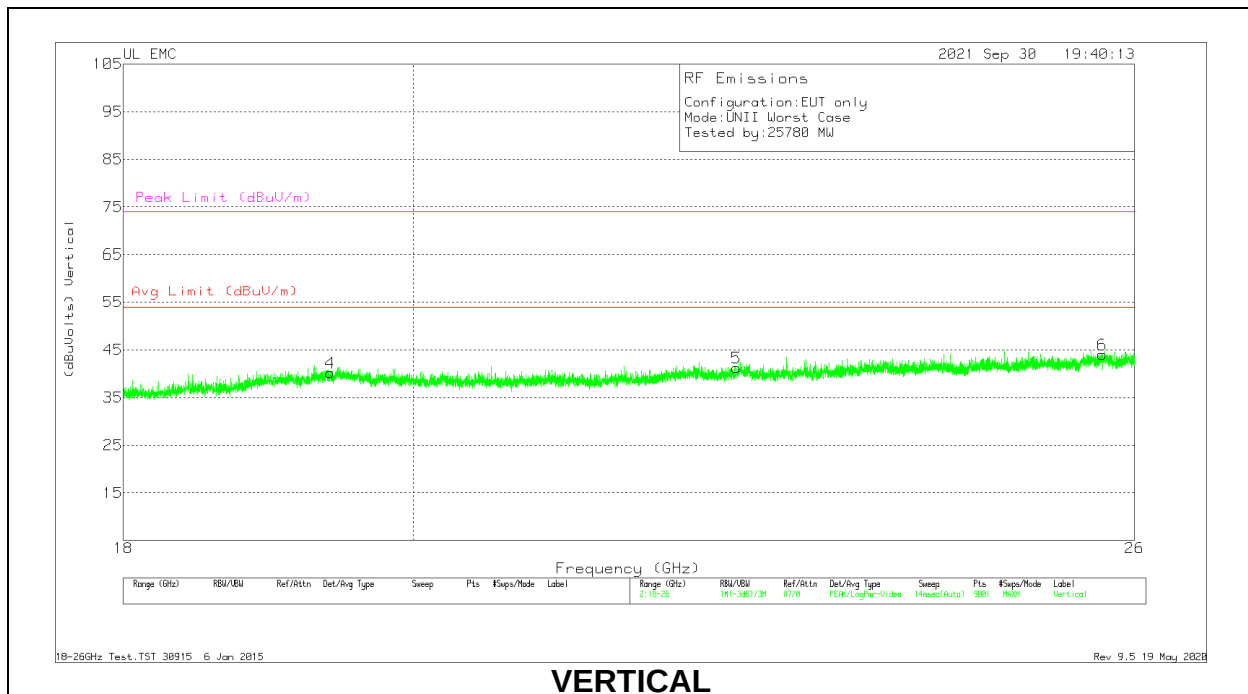
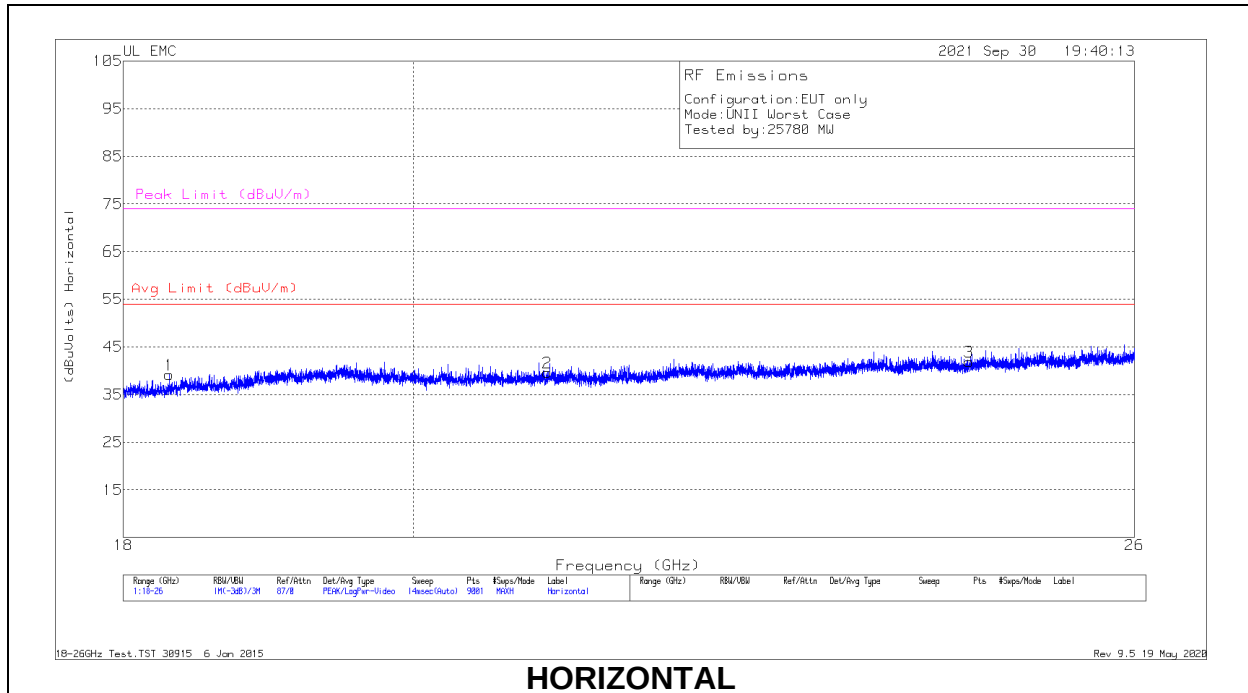
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 204045 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 171.2215	38.62	Pk	17.5	-30.1	26.02	43.52	-17.5	0-360	201	H
6	* 169.1385	34.17	Pk	17.6	-30.1	21.67	43.52	-21.85	0-360	100	V
4	52.9985	41.39	Pk	13.2	-31.2	23.39	40	-16.61	0-360	100	V
1	53.041	34.36	Pk	13.2	-31.2	16.36	40	-23.64	0-360	401	H
5	72.2984	36.27	Pk	14.1	-31	19.37	40	-20.63	0-360	100	V
2	86.6247	39.25	Pk	13.3	-30.9	21.65	40	-18.35	0-360	201	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

1.3. WORST CASE 18-26 GHz

SPURIOUS EMISSIONS 18-26 GHz (WORST-CASE CONFIGURATION)



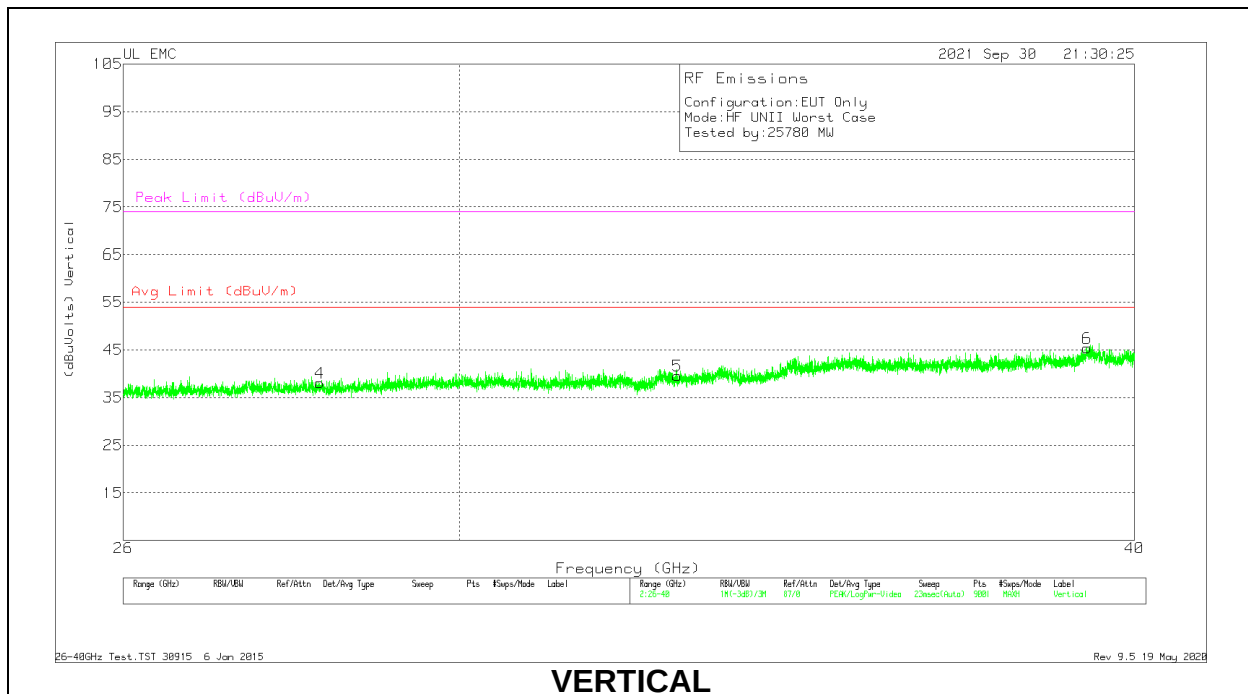
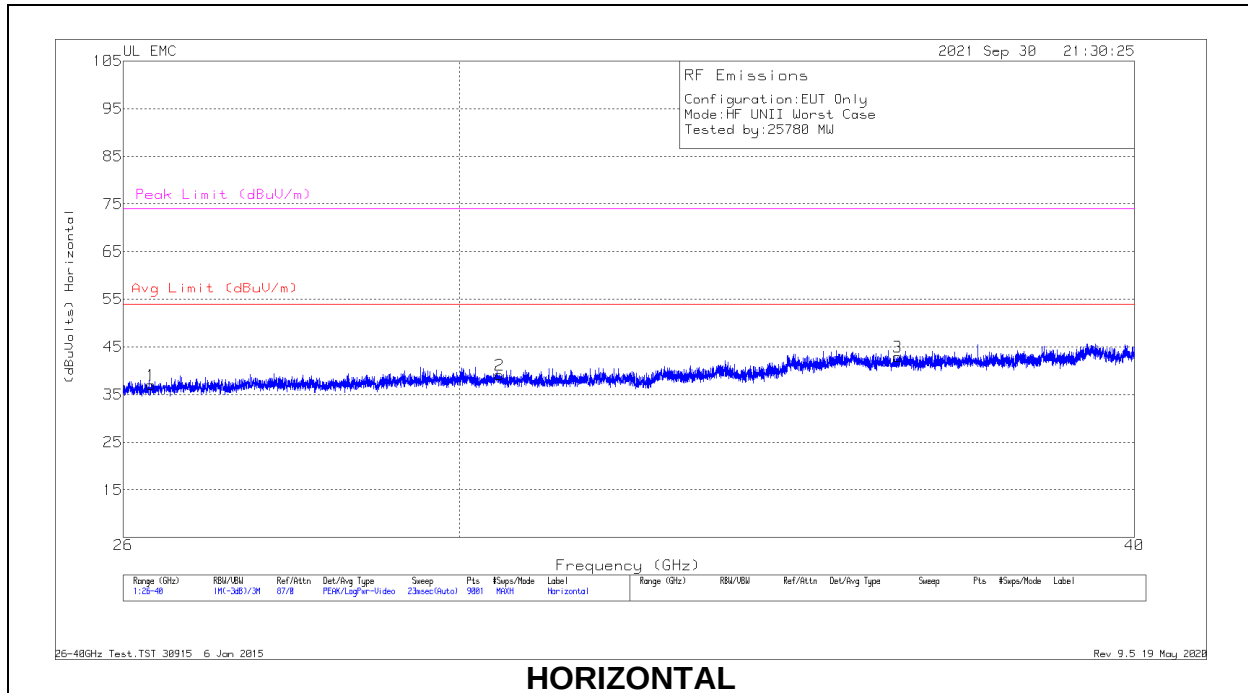
18 – 26GHz Data

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 81140	Amp/Cbl (dB)	Dist Corr (dB)	Corrected Reading (dBuVolts)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)
1	18.304	37.54	Pk	32.2	-21.1	-9.5	39.14	54	-14.86	74	-34.86
2	21	35.5	Pk	33.2	-19.6	-9.5	39.6	54	-14.4	74	-34.4
3	24.48089	35.06	Pk	33.8	-17.5	-9.5	41.86	54	-12.14	74	-32.14
4	19.40622	35.3	Pk	32.6	-18.2	-9.5	40.2	54	-13.8	74	-33.8
5	22.49511	36.12	Pk	33.4	-18.8	-9.5	41.22	54	-12.78	74	-32.78
6	25.69689	37.43	Pk	34.1	-18	-9.5	44.03	54	-9.97	74	-29.97

Pk - Peak detector

1.4. WORST CASE 26-40 GHz

SPURIOUS EMISSIONS 26-40 GHz (WORST-CASE CONFIGURATION)



26 – 40GHz Data

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	T90 AF (dB/m)	Amp/Cbl (dB)	Dist Corr (dB)	Corrected Reading (dBuVolts)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)
1	26.308	40.43	Pk	35.6	-29.5	-9.5	37.03	54	-16.97	74	-36.97
2	30.51733	37.51	Pk	36	-24.9	-9.5	39.11	54	-14.89	74	-34.89
3	36.16089	38.7	Pk	37.2	-23.5	-9.5	42.9	54	-11.1	74	-31.1
4	28.268	37.77	Pk	35.9	-26.1	-9.5	38.07	54	-15.93	74	-35.93
5	32.92222	37.28	Pk	36.6	-24.8	-9.5	39.58	54	-14.42	74	-34.42
6	39.19734	38.78	Pk	38.3	-22.2	-9.5	45.38	54	-8.62	74	-28.62

Pk - Peak detector

2. AC POWERLINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

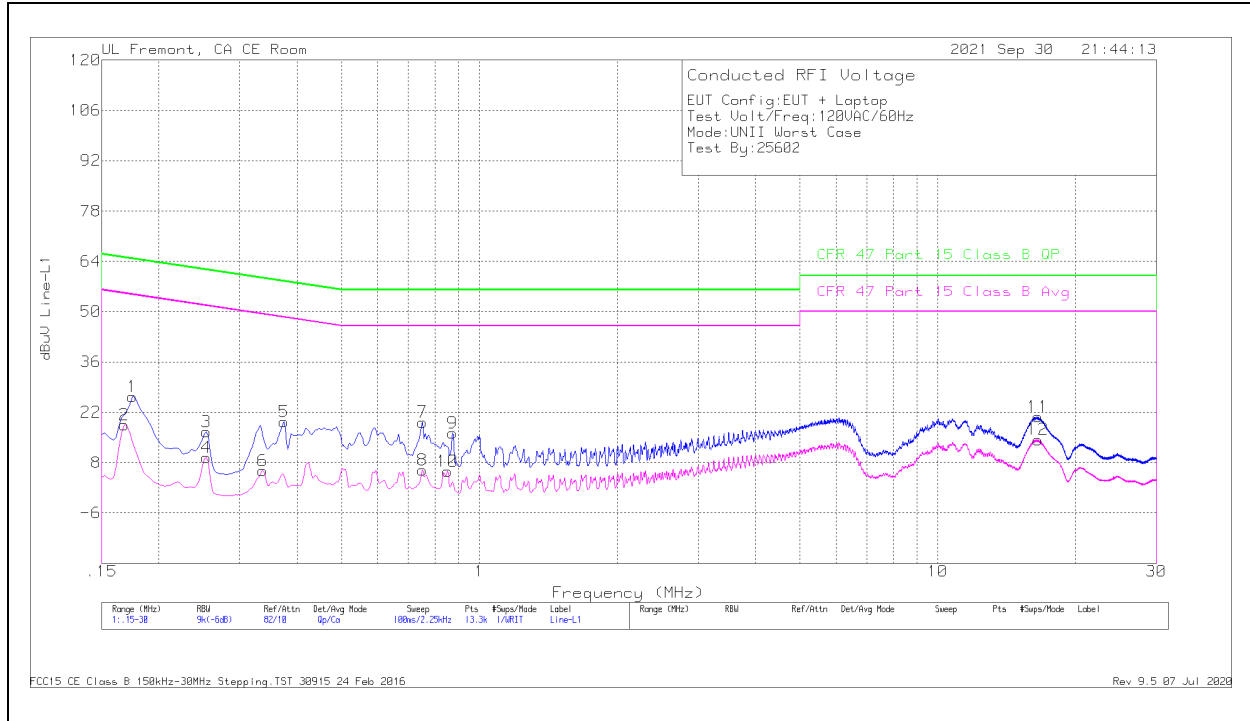
The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

2.1. AC POWER LINE WITH LAPTOP

LINE 1 RESULTS

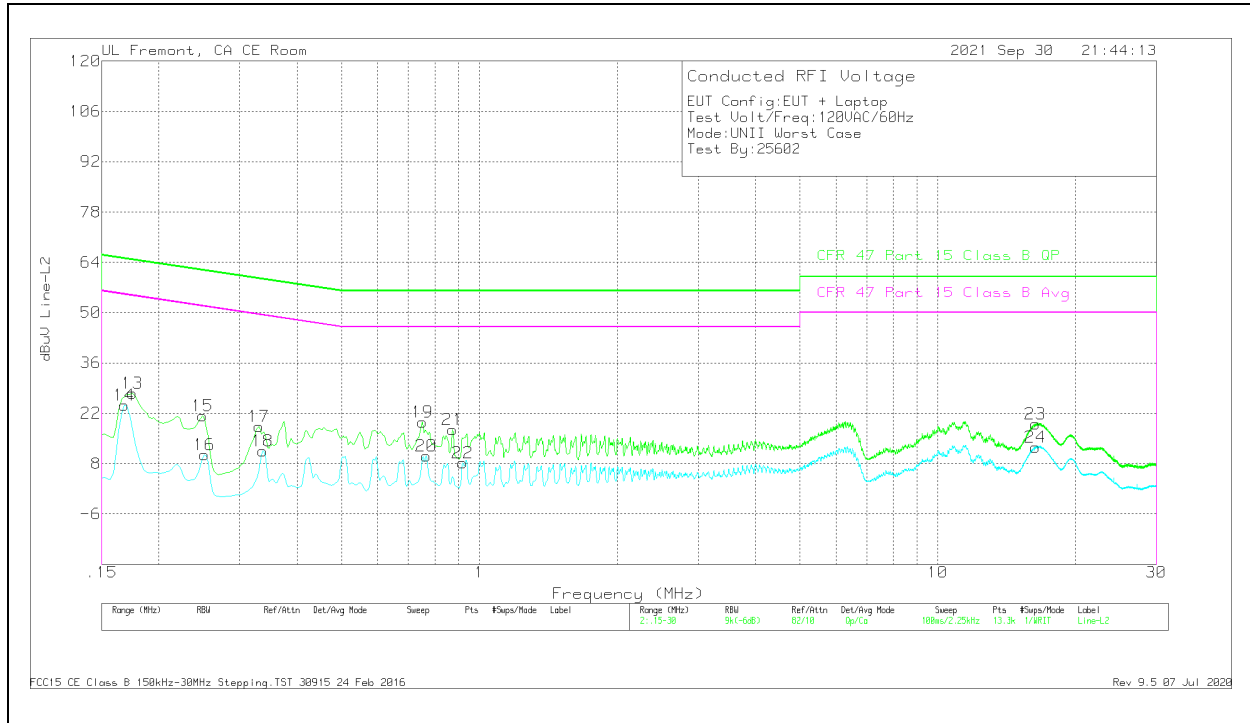


Range 1: Line-L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	PRE0186446 L1	LC Cables C1&C3 dB	TekBox Limiter TBFL1 Model 207	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av (CISPR) Margin (dB)
2	.168	9.12	Ca	0	0	9.4	18.52	-	-	55.06	-36.54
4	.2535	.1	Ca	0	0	9.3	9.4	-	-	51.64	-42.24
6	.33675	-3.49	Ca	0	0	9.3	5.81	-	-	49.28	-43.47
8	.75075	-3.42	Ca	0	.1	9.3	5.98	-	-	46	-40.02
10	.852	-3.8	Ca	0	.1	9.3	5.6	-	-	46	-40.4
12	16.52438	4.9	Ca	0	.2	9.3	14.4	-	-	50	-35.6
1	.17475	16.91	Qp	0	0	9.4	26.31	64.73	-38.42	-	-
3	.2535	7.27	Qp	0	0	9.3	16.57	61.64	-45.07	-	-
5	.375	10.04	Qp	0	0	9.3	19.34	58.39	-39.05	-	-
7	.75075	9.88	Qp	0	.1	9.3	19.28	56	-36.72	-	-
9	.8745	6.82	Qp	0	.1	9.3	16.22	56	-39.78	-	-
11	16.52325	11.25	Qp	0	.2	9.3	20.75	60	-39.25	-	-

Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 2 RESULTS**Range 2: Line-L2 .15 - 30MHz**

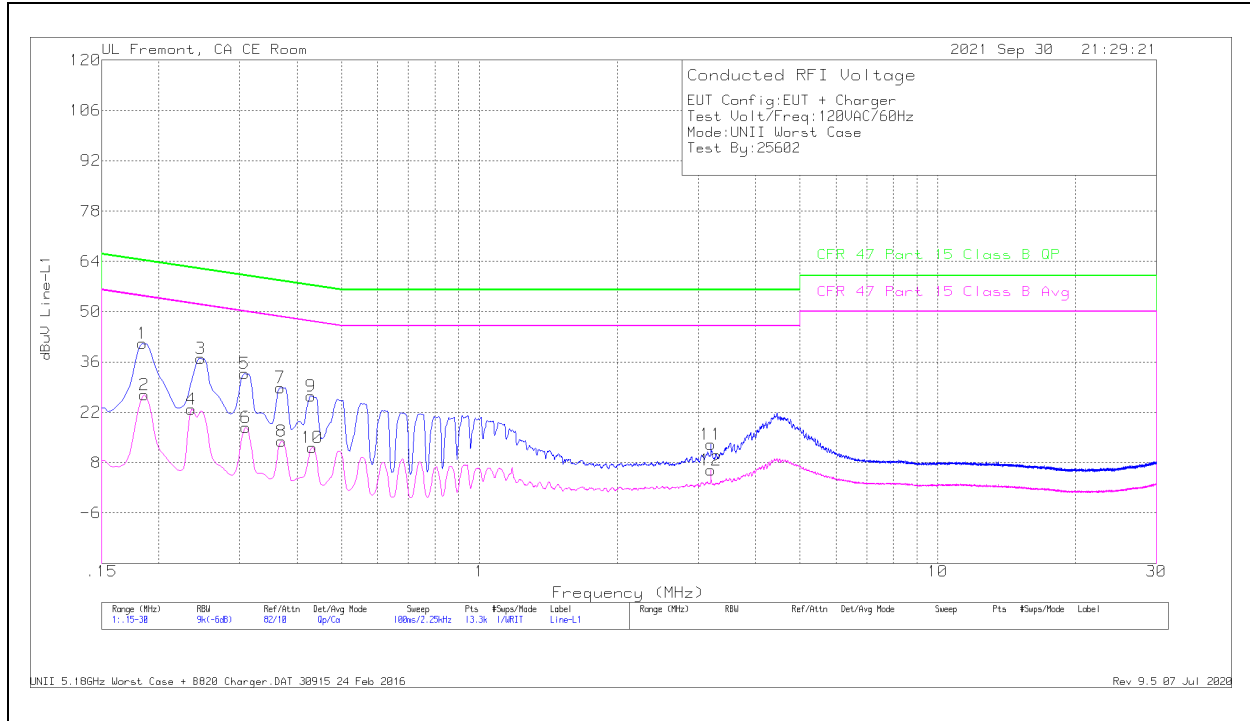
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	PRE0186446 L2	LC Cables C2&C3 dB	TekBox Limiter TBFL1 Model 207	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av (CISPR) Margin (dB)
14	.168	14.89	Ca	0	0	9.4	24.29	-	-	55.06	-30.77
16	.25125	1.22	Ca	0	0	9.3	10.52	-	-	51.72	-41.2
18	.33675	2.14	Ca	0	0	9.3	11.44	-	-	49.28	-37.84
20	.7665	.87	Ca	0	0	9.3	10.17	-	-	46	-35.83
22	.9195	-1.14	Ca	0	.1	9.3	8.26	-	-	46	-37.74
24	16.34325	3.11	Ca	0	.2	9.3	12.61	-	-	50	-37.39
13	.17475	18.18	Qp	0	0	9.4	27.58	64.73	-37.15	-	-
15	.249	11.92	Qp	0	0	9.3	21.22	61.79	-40.57	-	-
17	.33	9.03	Qp	0	0	9.3	18.33	59.45	-41.12	-	-
19	.75075	10.21	Qp	0	0	9.3	19.51	56	-36.49	-	-
21	.8745	7.98	Qp	0	.1	9.3	17.38	56	-38.62	-	-
23	16.34888	9.5	Qp	0	.2	9.3	19	60	-41	-	-

Qp - Quasi-Peak detector

Ca - CISPR average detection

2.2. AC POWER LINE WITH AC/DC ADAPTER

LINE 1 RESULTS

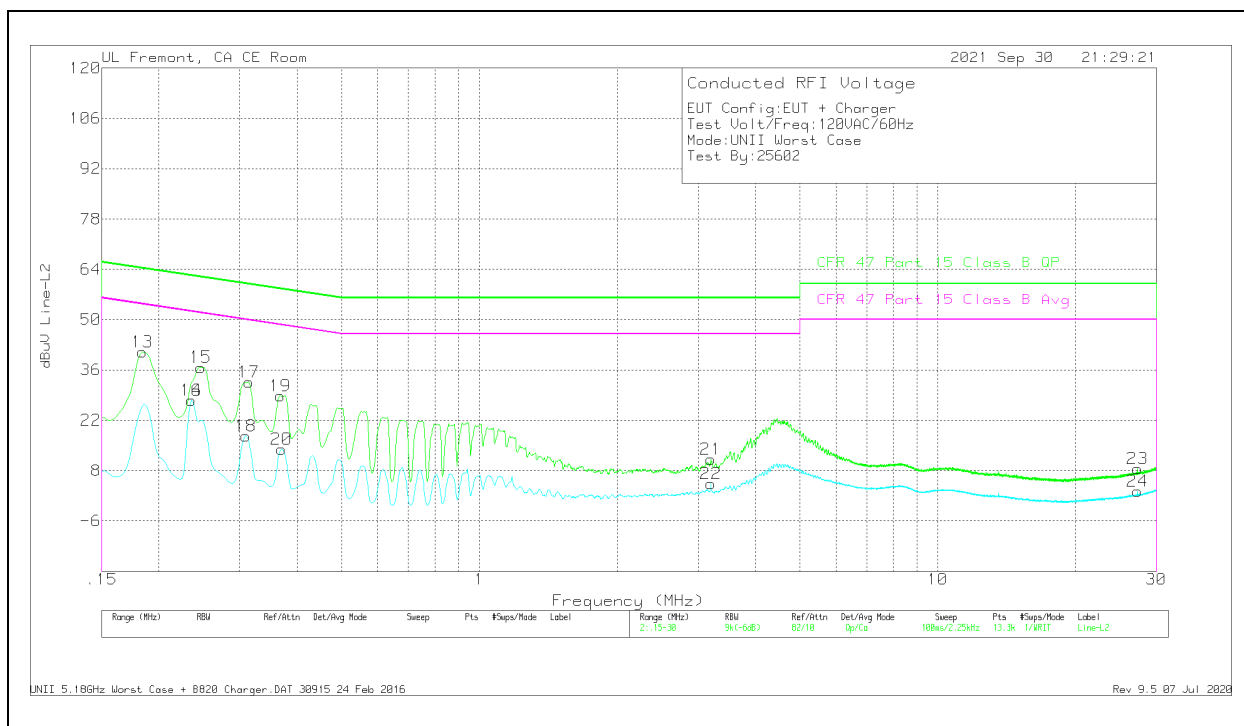


Range 1: Line-L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	PRE0186446 L1	LC Cables C1&C3 dB	TekBox Limiter TBFL1 Model 207	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
2	.186	17.46	Ca	0	0	9.4	26.86	-	-	54.21	-27.35
4	.2355	13.57	Ca	0	0	9.3	22.87	-	-	52.25	-29.38
6	.30975	8.47	Ca	0	0	9.3	17.77	-	-	49.98	-32.21
8	.3705	4.67	Ca	0	0	9.3	13.97	-	-	48.49	-34.52
10	.43125	2.9	Ca	0	0	9.3	12.2	-	-	47.23	-35.03
12	3.19875	-3.54	Ca	0	.1	9.3	5.86	-	-	46	-40.14
1	.18375	31.81	Qp	0	0	9.4	41.21	64.31	-23.1	-	-
3	.24675	27.67	Qp	0	0	9.3	36.97	61.87	-24.9	-	-
5	.3075	23.43	Qp	0	0	9.3	32.73	60.04	-27.31	-	-
7	.36825	19.58	Qp	0	0	9.3	28.88	58.54	-29.66	-	-
9	.429	17.23	Qp	0	0	9.3	26.53	57.27	-30.74	-	-
11	3.19875	3.65	Qp	0	.1	9.3	13.05	56	-42.95	-	-

Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 2 RESULTS**Range 2: Line-L2 .15 - 30MHz**

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	PRE0186446 L2	LC Cables C2&C3 dB	TekBox Limiter TBFL1 Model 207	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
14	.2355	18.24	Ca	0	0	9.3	27.54	-	-	52.25	-24.71
16	.2355	18.24	Ca	0	0	9.3	27.54	-	-	52.25	-24.71
18	.30975	8.27	Ca	0	0	9.3	17.57	-	-	49.98	-32.41
20	.3705	4.68	Ca	0	0	9.3	13.98	-	-	48.49	-34.51
22	3.19875	-5.02	Ca	0	.1	9.3	4.38	-	-	46	-41.62
24	27.30863	-7.45	Ca	.1	.3	9.4	2.35	-	-	50	-47.65
13	.18375	31.53	Qp	0	0	9.4	40.93	64.31	-23.38	-	-
15	.24675	27.43	Qp	0	0	9.3	36.73	61.87	-25.14	-	-
17	.31425	23.27	Qp	0	0	9.3	32.57	59.86	-27.29	-	-
19	.36825	19.48	Qp	0	0	9.3	28.78	58.54	-29.76	-	-
21	3.19875	1.78	Qp	0	.1	9.3	11.18	56	-44.82	-	-
23	27.30525	-1.32	Qp	.1	.3	9.4	8.48	60	-51.52	-	-

Qp - Quasi-Peak detector

Ca - CISPR average detection

3. SETUP PHOTOS:

Please refer to setup report 13911916-EP1V1

END OF TEST REPORT