



FCC Part 1 Subpart I
FCC Part 2 Subpart J

CERTIFICATION TEST REPORT

FOR

SMART PHONE

**MODEL NO: A2651 (Parent Model, Full Test)
A2893, A2894, A2895, A2896 (Variant Models)**

**FCC ID: BCG-E8141A (Parent Model)
FCC ID: BCG-E8154A, BCG-E8155A, BCG-E8156A (Variant
Models)**

REPORT NUMBER: 14040866-E16V1

ISSUE DATE: JULY 18, 2022

Prepared for
APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A

Prepared by
UL LLC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	7/18/2022	Initial Issue	T. Chan

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION.....	6
4. DECISION RULES AND MEASUREMENT UNCERTAINTY.....	6
4.1. METROLOGICAL TRACEABILITY	6
4.2. DECISION RULES	6
4.3. MEASUREMENT UNCERTAINTY	6
5. KDB 680106 D01 SECTION 5b EQUIPMENT APPROVAL CONSIDERATIONS	7
6. EQUIPMENT UNDER TEST	8
6.1. DESCRIPTION OF EUT.....	8
6.2. WORST-CASE CONFIGURATION AND MODE.....	8
6.3. DESCRIPTION OF TEST SETUP.....	9
7. TEST AND MEASUREMENT EQUIPMENT	12
8. DUTY CYCLE.....	13
9. MAXIMUM PERMISSIBLE RF EXPOSURE	14
9.1. FCC LIMITS AND SUMMARY.....	14
9.1.1. MODEL A2651	15
9.1.2. MODEL A2893	19
9.1.3. MODEL A2894	20
9.1.4. MODEL A2895/A2896	21
10. SETUP PHOTO	22

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A

EUT DESCRIPTION: SMARTPHONE

MODEL: A2651 (Parent Model)
A2893, A2894, A2895, A2896 (Variant Models)

BRAND: APPLE

FCC ID: BCG-E8141A (Parent Model)
BCG-E8154A, BCG-E8155A, BCG-E8156A (Variant Models)

SERIAL NUMBER: H20XYRX7CV (Parent Model, Full Test)
QDWXGCQ4GG, Y19PXXDW4C, XVX9Y52GQC (Variant Models)

SAMPLE RECEIPT DATE JULY 06, 2022

DATE TESTED: JULY 06 - 07, 2022

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 1 SUBPART I & PART 2 SUBPART J	Complies

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, any agency of the Federal Government, or any agency of the U.S. government

Reviewed By:

Prepared By:



Chin Pang
Senior Lab Engineer
UL LLC.



Alejandro Martinez
Test Engineer
UL LLC.

2. TEST METHODOLOGY

All measurements made in accordance with KDB 680106 and manufacturer KDB inquiry.

3. FACILITIES AND ACCREDITATION

UL LLC is accredited by A2LA, certification #0751.05, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
☐	Building 1: 47173 Benicia Street, Fremont, CA 94538	US0104	2324A	550739
☒	Building 2: 47266 Benicia Street, Fremont, CA 94538	US0104	22541	550739
☐	Building 4: 47658 Kato Rd, Fremont, CA 94538	US0104	2324B	550739

4. DECISION RULES AND MEASUREMENT UNCERTAINTY

4.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

4.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{Lab}
Magnetic Field Reading (A/m)	+/-0.04284 (A/m)
Electric Field Reading (V/m)	+/-0.03682 (V/m)

Uncertainty figures are valid to a confidence level of 95.45%.

5. KDB 680106 D01 SECTION 5b EQUIPMENT APPROVAL CONSIDERATIONS

Requirement	Device
(1) Power transfer frequency is less than 1 MHz.	Yes. Operating Frequency is 360 kHz
(2) Output power from each primary coil is less than or equal to 15 watts.	Yes. The maximum power is 5 Watts
(3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.	Yes. The system includes one single primary and secondary coil and the device is designed to charge a single client
(4) Client device is placed directly in contact with the transmitter.	Yes. The client device is placed directly in contact with the transmitter.
(5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	No. It is a portable device.
(6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.	No. The measurement is based on KDB inquiry which 0mm distance is set for all positions testing.

6. EQUIPMENT UNDER TEST

6.1. DESCRIPTION OF EUT

The Apple iPhone is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, 5G, CDMA, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wideband, GPS and NFC. All models support at least one UICC based SIM. The second SIM is either an UICC based p-SIM (physical SIM) or e-SIM (electronic SIM). The device supports a built-in inductive charging transmitter and receiver. The rechargeable battery is not user accessible.

Model A2895 and A2896 have the same FCC ID, Spot check was performed only for Model A2895, difference between these models are on the SIM only.

The Model and FCC IDs covered by this report includes:

Parent Model: A2651, FCC ID: BCG-E8141A

Variant Models: A2893, FCC ID: BCG-E8154A
 A2894; FCC ID: BCG-E8155A
 A2895 & A2896, FCC ID: BCG-E8156A

6.2. WORST-CASE CONFIGURATION AND MODE

The EUT is a smartphone which connected to the AC/DC adapter via USB-C cable, and the inductive charging coil to charge WPT Client. For the entire radiated emissions test, the EUT was investigated on the following configuration during the test at its natural orientation. Full test, configuration 1 & 2, was investigated on Parent model, and the worst case was configuration 2 at 25-70% power charging 2mm shift to the top, therefore, config 2, worst case was investigated only on variant models. For worst case at H field on configuration 2 at 2cm increment, please see SAR simulation report.

Model A2483

Config	Mode	Descriptions
1	Operating	Direct contact charging between the EUT & WPT Client, and the EUT is powered by AC/DC adapter via USB-C cable.
2	Operating	2mm airgap charging between the EUT & WPT Client + 2mm offset shift to Top or Bottom, and the EUT is powered by AC/DC adapter via USB-C cable.

A2881, A2882, A2883, A2884 (Variant Model, Spot Check Worst Case)

Config	Mode	Descriptions
2	Operating	2mm airgap charging between the EUT & WPT Client + 2mm offset shift to Top or Bottom@ 25 ~ 70% power charging, and the EUT is powered by AC/DC adapter via USB-C cable.

6.3. DESCRIPTION OF TEST SETUP**SUPPORT EQUIPMENT**

SUPPORT EQUIPMENT & PERIPHERALS LIST			
Description	Manufacturer	Model	Serial Number
WPT Client	N/A	N/A	N/A
AC/DC Adapter	Apple	A1385	N/A

I/O CABLES

The EUT with lightning to USB-C cable powered by AC/DC Adapter.

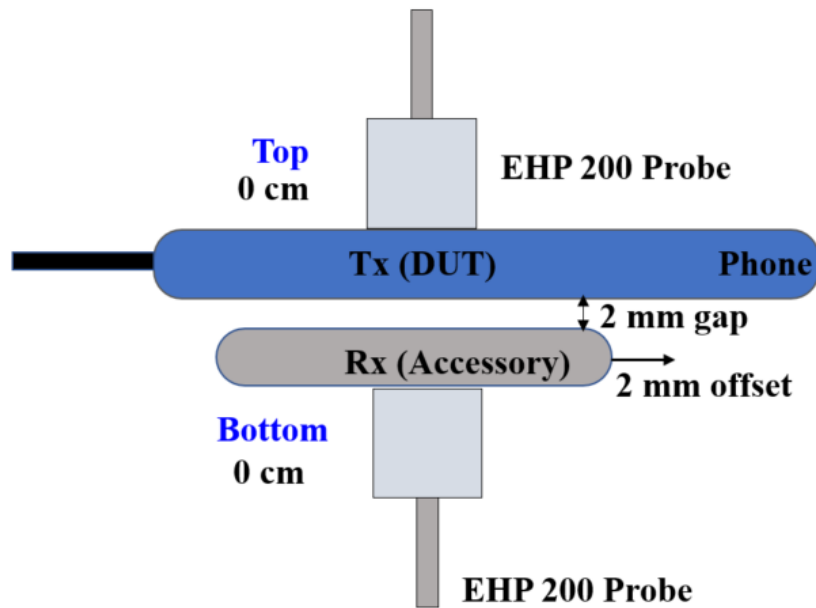
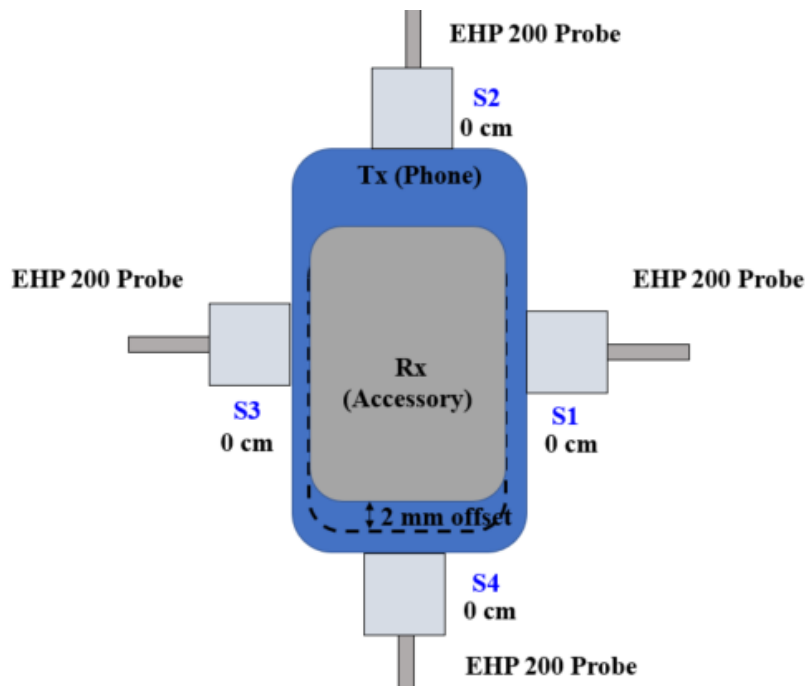
TEST SETUP

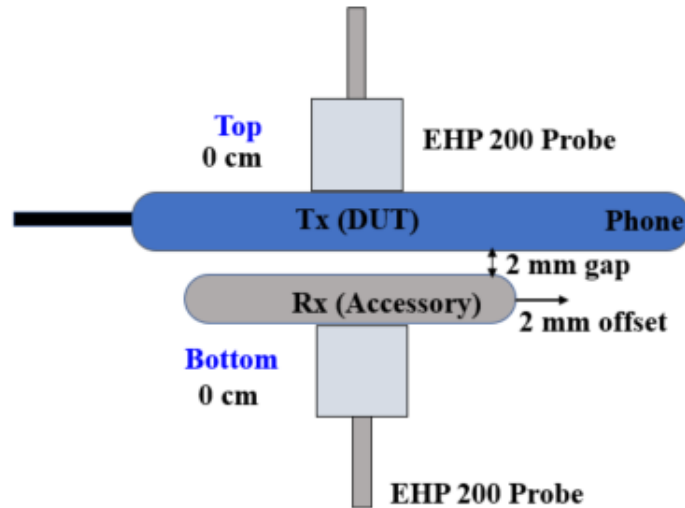
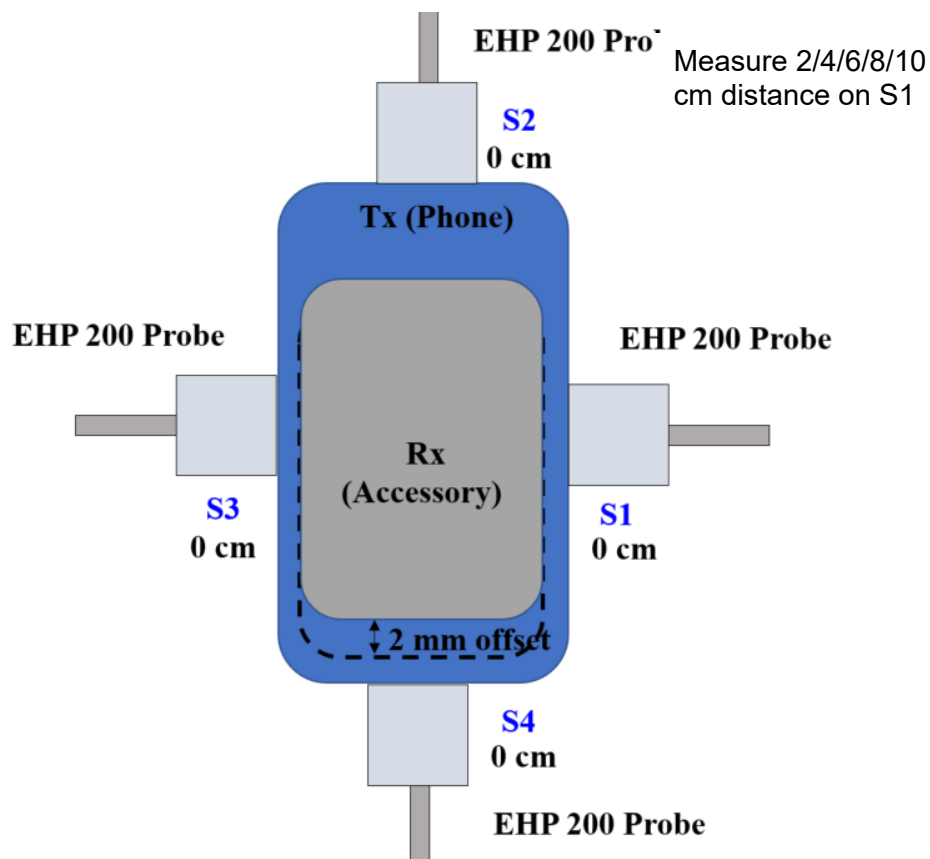
The following configurations are tested:

Configuration	Mode	Descriptions
1 (Direct Contact)	Operating (WPT Client, ~25% Power Charging)	EUT with lightning to USB-C cable powered by AC/DC Adapter & Wireless Charging to WPT Client
	Operating (WPT Client, 25%~70% Power Charging)	
	Operating (WPT Client >75% Power Charging)	
2 (2mm Airgap + 2mm Shift to Top or Bottom)	Operating (WPT Client, ~25% Power Charging)	EUT with lightning to USB-C cable powered by AC/DC Adapter & Wireless Charging to WPT Client
	Operating (WPT Client, 25%~70% Power Charging)	
	Operating (WPT Client >75% Power Charging)	

MEASUREMENT SETUP

The measurement was taken using a probe placed 0 mm surrounding the device. Measurements were taken from the top and all sides of the EUT per KDB680106 D01 v03 and the manufacturer KDB inquiry.

CONFIGURATION 1**Side View****Top View**

CONFIGURATION 2Side ViewSide View

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was used for the tests documented in this report:

Test Equipment List						
Description	Manufacturer	Model	S/N	Label ID	Cal Due	Cal Date
Electric and Magnetic Field Probe	Narda	EHP-200A	160WX41008	PRE019185	02/17/2023	02/17/2022
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	MY55410147	125179	02/01/2023	02/01/2022

8. DUTY CYCLE

LIMITS

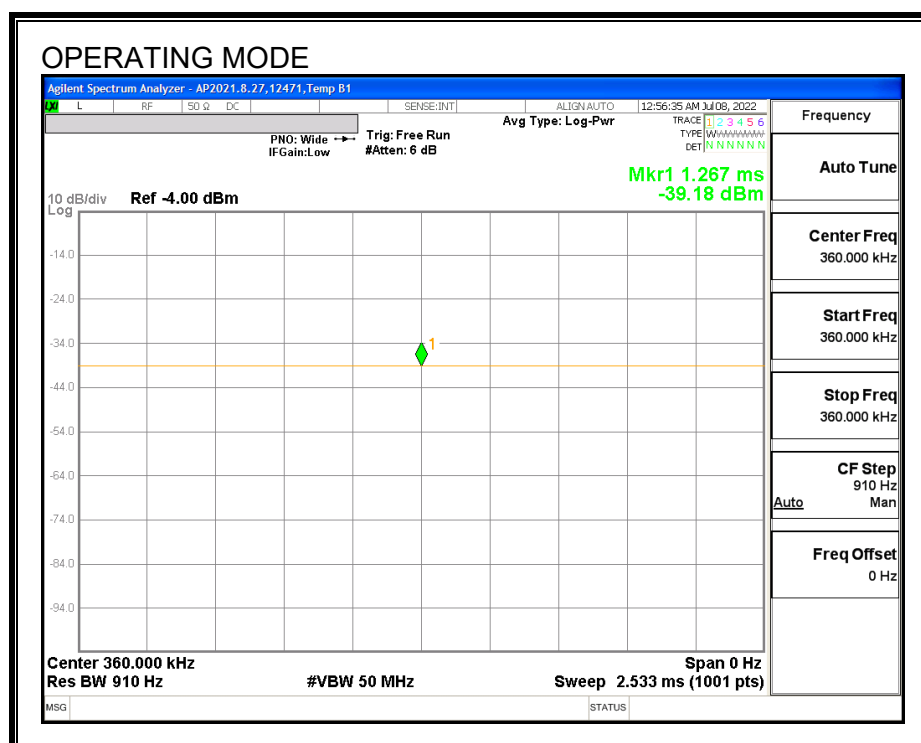
None; for reporting purposes only.

PROCEDURE

Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
Operating	100.00	100.00	1.00	100.00%	0.00



9. MAXIMUM PERMISSIBLE RF EXPOSURE

9.1. FCC LIMITS AND SUMMARY

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

Configuration # 2 Summary Table			
	Model No.	E-Field (V/m)	H-Field (A/m)
Parent Model	A2651	7.143	1.047
Variant Model	A2893	7.028	0.782
	A2894	7.052	0.716
	A2895/AA2896	6.974	0.873

9.1.1. MODEL A2651**RESULTS**

ID:	12471	Date:	7/6/2022
------------	-------	--------------	----------

FCC RF Exposure Summary of Results**Configuration #1:**

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	6.574	1.07%	1.63	0.211	12.94%

Configuration #2:

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	7.143	1.16%	1.63	1.047	64.23%

E- FIELD AND H- FIELD MEASUREMENTS

Note: Peak measurements were performed. RMS values were calculated from the peak measurement. Please refer to the formula for calculating the RMS values: [Field Strength x $\sqrt{\text{Duty Cycle}}$].

Configuration #1

FCC Limit													
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit	Electric Field Reading				Magnetic Field Limit	Magnetic Field Reading				
			(V/m)	(V/m)				(A/m)	(A/m)				
			FCC	Location	Peak	Duty Cycle %	FCC Average	FCC	Location	Peak	Duty Cycle %	FCC Average	
1	Operating Real Product (Power <25% Charging)	0	614	S1	0.488	100	0.488	1.63	S1	0.106	100	0.106	
				S2	0.504		0.504		S2	0.049		0.049	
				S3	0.388		0.388		S3	0.103		0.103	
				S4	0.388		0.388		S4	0.051		0.051	
				Bottom	5.974		5.974		Bottom	0.146		0.146	
				Top	0.467		0.467		Top	0.049		0.049	
				Max	5.974		5.974		Max	0.146		0.146	
				S1	0.473		100		0.473	S1		0.127	100
	S2			0.473	0.473	S2			0.049	0.049			
	S3			0.406	0.406	S3			0.079	0.079			
	S4			0.394	0.394	S4			0.049	0.049			
	Bottom			6.574	6.574	Bottom			0.154	0.154			
	Top			0.485	0.485	Top			0.058	0.058			
	Max			6.574	6.574	Max			0.154	0.154			
	S1			0.388	100	0.388			S1	0.195	100	0.195	
	S2			0.428		0.428	S2		0.049	0.049			
	S3			0.388		0.388	S3		0.117	0.117			
	S4			0.377		0.377	S4		0.050	0.050			
	Bottom			6.163		6.163	Bottom		0.211	0.211			
	Top			1.865		1.865	Top		0.058	0.058			
	Max			6.163		6.163	Max		0.211	0.211			

Configuration #2

FCC Limit														
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit		Electric Field Reading				Magnetic Field Limit		Magnetic Field Reading			
			(V/m)		(V/m)				(A/m)		(A/m)			
			FCC	Location	Peak	Duty Cycle %	FCC Average	FCC	Location	Peak	Duty Cycle %	FCC Average		
2	Operating Real Product (Power ~< 25% Charging) (2mm Airgap at Center)	0	614	S1	0.485	100	0.485	1.63	S1	0.231	100	0.231		
				S2	0.449		0.449		S2	0.049		0.049		
				S3	0.430		0.430		S3	0.158		0.158		
				S4	0.416		0.416		S4	0.052		0.052		
				Bottom	6.899		6.899		Bottom	0.201		0.201		
	Operating Real Product (Power ~<25% Charging) (2mm Airgap & 2mm Shift to the Top)			Top	1.834	1.834	Top		0.080	0.080				
				Max	6.899	6.899	Max		0.201	0.201				
				S1	0.726	0.726	S1		0.315	0.315				
				S2	0.500	0.500	S2		0.117	0.117				
				S3	0.498	0.498	S3		0.333	0.333				
	Operating Real Product (Power ~25% Charging) (2mm Airgap & 2mm Shift to the Bottom)			S4	0.388	0.388	S4		0.072	0.072				
				Bottom	6.295	6.295	Bottom		0.848	0.848				
				Top	1.978	1.978	Top		0.101	0.101				
				Max	6.295	6.295	Max		0.848	0.848				
				S1	0.426	0.426	S1		0.151	0.151				
	Operating Real Product (Power ~25% - 70% Charging) (2mm Airgap at Center)			S2	0.485	0.485	S2		0.065	0.065				
				S3	0.655	0.655	S3		0.187	0.187				
				S4	0.398	0.398	S4		0.049	0.049				
				Bottom	6.394	6.394	Bottom		0.314	0.314				
				Top	1.933	1.933	Top		0.076	0.076				
	Operating Real Product (Power ~25% - 70% Charging) (2mm Airgap & 2mm Shift to the Bottom)			Max	6.394	6.394	Max		0.314	0.314				
				S1	0.524	0.524	S1		0.156	0.156				
				S2	0.485	0.485	S2		0.059	0.059				
				S3	0.442	0.442	S3		0.108	0.108				
				S4	0.400	0.400	S4		0.053	0.053				
	Operating Real Product (Power ~25% - 70% Charging) (2mm Airgap & 2mm Shift to the Bottom)			Bottom	5.482	5.482	Bottom		0.364	0.364				
				Top	0.586	0.586	Top		0.081	0.081				
				Max	5.482	5.482	Max		0.364	0.364				
				S1	0.618	0.618	S1		0.466	0.466				
				S2	0.399	0.399	S2		0.146	0.146				
	Operating Real Product (Power ~25% - 70% Charging) (2mm Airgap & 2mm Shift to the Bottom)			S3	0.391	0.391	S3		0.360	0.360				
				S4	0.407	0.407	S4		0.090	0.090				
				Bottom	4.882	4.882	Bottom		1.047	1.047				
				Top	0.505	0.505	Top		0.107	0.107				
				Max	0.505	0.505	Max		1.047	1.047				
	Operating Real Product (Power ~25% - 70% Charging) (2mm Airgap & 2mm Shift to the Bottom)			S1	0.473	0.473	S1		0.375	0.375				
				S2	0.473	0.473	S2		0.079	0.079				
				S3	0.550	0.550	S3		0.471	0.471				
				S4	0.388	0.388	S4		0.087	0.087				
				Bottom	7.143	7.143	Bottom		0.456	0.456				
	Operating Real Product (Power ~25% - 70% Charging) (2mm Airgap & 2mm Shift to the Bottom)			Top	1.857	1.857	Top		0.083	0.083				
				Max	7.143	7.143	Max		0.456	0.456				
				S1	0.632	0.632	S1		0.144	0.144				
				S2	0.408	0.408	S2		0.056	0.056				
				S3	0.451	0.451	S3		0.070	0.070				
	Operating Real Product (Power ~75% Charging) (2mm Airgap at Center)			S4	0.417	0.417	S4		0.049	0.049				
				Bottom	6.223	6.223	Bottom		0.305	0.305				
				Top	1.884	1.884	Top		0.076	0.076				
				Max	6.223	6.223	Max		0.305	0.305				
				S1	0.618	0.618	S1		0.470	0.470				
	Operating Real Product (Power ~75% Charging) (2mm Airgap & 2mm Shift to the Top)			S2	0.414	0.414	S2		0.147	0.147				
				S3	0.449	0.449	S3		0.333	0.333				
				S4	0.380	0.380	S4		0.049	0.049				
				Bottom	4.909	4.909	Bottom		1.003	1.003				
				Top	1.281	1.281	Top		0.053	0.053				
	Operating Real Product (Power ~75% Charging) (2mm Airgap & 2mm Shift to the Bottom)			Max	4.909	4.909	Max		1.003	1.003				
				S1	0.466	0.466	S1		0.113	0.113				
				S2	0.406	0.406	S2		0.053	0.053				
				S3	0.441	0.441	S3		0.141	0.141				
				S4	0.391	0.391	S4		0.051	0.051				
	Operating Real Product (Power ~75% Charging) (2mm Airgap & 2mm Shift to the Bottom)			Bottom	6.301	6.301	Bottom		0.174	0.174				
				Top	2.075	2.075	Top		0.078	0.078				
				Max	6.301	6.301	Max		0.174	0.174				

Configuration #2 H Field in 2cm increment

Note: Please refers to simulation report from SAR.

9.1.2. MODEL A2893**RESULTS**

ID:	12471	Date:	7/7/22
------------	-------	--------------	--------

FCC RF Exposure Summary of Results**Configuration #2:**

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	7.028	1.14%	1.63	0.782	47.98%

E- FIELD AND H- FIELD MEASUREMENTS

Note: Peak measurements were performed. RMS values were calculated from the peak measurement. Please refer to the formula for calculating the RMS values: [Field Strength x $\sqrt{\text{Duty Cycle}}$].

Configuration #2

FCC Limit													
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit	Electric Field Reading				Magnetic Field Limit	Magnetic Field Reading				
			(V/m)	(V/m)				(A/m)	(A/m)				
			FCC	Location	Peak	Duty Cycle %	FCC Average	FCC	Location	Peak	Duty Cycle %	FCC Average	
2	Operating Real Product (Power ~ 25% - 70% Charging) (2mm Airgap & 2mm Shift to the Top)	0	614	S1	0.580	100	0.580	1.63	S1	0.273	100	0.273	
				S2	0.556		0.556		S2	0.097		0.097	
				S3	0.485		0.485		S3	0.276		0.276	
				S4	0.416		0.416		S4	0.074		0.074	
				Bottom	7.028		7.028		Bottom	0.782		0.782	
				Top	3.611		3.611		Top	0.086		0.086	
				Max	7.028		7.028		Max	0.782		0.782	

9.1.3. MODEL A2894**RESULTS**

ID:	12471	Date:	7/7/22
------------	-------	--------------	--------

FCC RF Exposure Summary of Results**Configuration #2:**

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	7.052	1.15%	1.63	0.716	43.93%

E- FIELD AND H- FIELD MEASUREMENTS

Note: Peak measurements were performed. RMS values were calculated from the peak measurement. Please refer to the formula for calculating the RMS values: [Field Strength x $\sqrt{\text{Duty Cycle}}$].

Configuration #2:

FCC Limit													
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit	Electric Field Reading				Magnetic Field Limit	Magnetic Field Reading				
			(V/m)	(V/m)				(A/m)	(A/m)				
			FCC	Location	Peak	Duty Cycle %	FCC Average	FCC	Location	Peak	Duty Cycle %	FCC Average	
2	Operating Real Product (Power ~ 25% - 70% Charging) (2mm Airgap & 2mm Shift to the Top)	0	614	S1	0.760	100	0.760	1.63	S1	0.256	100	0.256	
				S2	0.511		0.511		S2	0.078		0.078	
				S3	0.442		0.442		S3	0.224		0.224	
				S4	0.401		0.401		S4	0.260		0.260	
				Bottom	7.052		7.052		Bottom	0.716		0.716	
				Top	2.704		2.704		Top	0.086		0.086	
				Max	7.052		7.052		Max	0.716		0.716	

9.1.4. MODEL A2895/A2896**RESULTS**

ID:	12471	Date:	7/7/22
------------	-------	--------------	--------

FCC RF Exposure Summary of Results**Configuration #2:**

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	6.974	1.14%	1.63	0.873	53.56%

E- FIELD AND H- FIELD MEASUREMENTS

Note: Peak measurements were performed. RMS values were calculated from the peak measurement. Please refer to the formula for calculating the RMS values: $[\text{Field Strength} \times \sqrt{\text{Duty Cycle}}]$.

Configuration #2:**FCC Limit**

FCC Limit												
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit	Electric Field Reading				Magnetic Field Limit	Magnetic Field Reading			
			(V/m)	(V/m)				(A/m)	(A/m)			
			FCC	Location	Peak	Duty Cycle %	FCC Average	FCC	Location	Peak	Duty Cycle %	FCC Average
2	Operating Real Product (Power ~ 25% - 70% Charging) (2mm Airgap & 2mm Shift to the Top)	0	614	S1	0.628	100	0.628	1.63	S1	0.332	100	0.332
				S2	0.441		0.441		S2	0.108		0.108
				S3	0.407		0.407		S3	0.316		0.316
				S4	0.391		0.391		S4	0.181		0.181
				Bottom	6.974		6.974		Bottom	0.873		0.873
				Top	2.108		2.108		Top	0.108		0.108
				Max	6.974		6.974		Max	0.873		0.873

10. SETUP PHOTO

Please see setup photo report 14040866-EP1V1

END OF REPORT