

TEST REPORT

Report Number : 14523744-E24V1

Applicant : APPLE, INC
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A

Model : A3101

Brand : APPLE

FCC ID : BCG-E8436A

IC : 597C-E8436A

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR Part 2, Part 25
ISED RSS-GEN Issue 5, RSS-170 ISSUE 4

Date Of Issue:
2023-08-11

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



Revision History


<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	2023-08-11	Initial Review	Mengistu Mekuria

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. SUMMARY OF TEST RESULTS	6
3. TEST METHODOLOGY	7
4. FACILITIES AND ACCREDITATION	7
5. DECISION RULES AND MEASUREMENT UNCERTAINTY.....	8
5.1. METROLOGICAL TRACEABILITY.....	8
5.2. DECISION RULES.....	8
5.3. MEASUREMENT UNCERTAINTY	8
5.4. SAMPLE CALCULATION.....	8
6. EQUIPMENT UNDER TEST	9
6.1. DESCRIPTION OF EUT.....	9
6.2. MAXIMUM OUTPUT POWER.....	9
6.3. SOFTWARE AND FIRMWARE	11
6.4. MAXIMUM ANTENNA GAIN	11
6.5. WORST-CASE CONFIGURATION AND MODE	12
6.6. DESCRIPTION OF TEST SETUP.....	13
7. TEST AND MEASUREMENT EQUIPMENT.....	14
8. RF OUTPUT POWER VERIFICATION.....	16
8.1. LTE BAND 53.....	17
8.2. 5G NR n53	19
9. CONDUCTED TEST RESULTS	20
9.1. ON TIME AND DUTY CYCLE	20
9.2. OCCUPIED BANDWIDTH.....	23
9.2.1. LTE BAND 53.....	25
9.2.2. 5G NR n53	26
9.3. MAXIMUM POWER SPECTRAL DENSITY.....	27
9.3.1. LTE BAND 53.....	28
9.3.2. 5G NR n53	29
9.4. 6dB BANDWIDTH	30
9.4.1. LTE BAND 53.....	32
9.4.2. 5G NR n53	33
9.5. EMISSIONS MASK AND BANDWIDTH.....	34
9.5.1. LTE BAND 53.....	36
9.5.2. 5G NR n53	40

9.6.	OUT OF BAND EMISSIONS	42
9.6.1.	LTE BAND 53.....	43
9.6.2.	5G NR 53	45
9.7.	FREQUENCY STABILITY	46
9.7.1.	LTE BAND 53.....	46
9.7.2.	5G NR n53	47
10.	RADIATED TEST RESULTS.....	48
10.1.	FIELD STRENGTH OF SPURIOUS RADIATION, ANT 1.....	52
10.1.1.	LTE BAND 53	52
10.1.2.	5G NR n53.....	54
10.2.	FIELD STRENGTH OF SPURIOUS RADIATION, ANT 2.....	56
10.2.1.	LTE BAND 53	56
10.2.2.	5G NR n53.....	58
11.	SETUP PHOTOS.....	60

1. ATTESTATION OF TEST RESULTS

Applicant Name and Address	APPLE, INC 1 APPLE PARK WAY CUPERTINO, CA 95014, U.S.A	
Model	A3101	
Brand	APPLE	
FCC ID	BCG-E8436A	
IC	579C-E8436A	
EUT Description	SMARTPHONE	
Serial Number	PNYQ97FW23, HFYYJNPY1W, XV07R41DQX (CONDUCTED) AND MKDCGFM9N5, YRVHP7P03H (RADIATED)	
Sample Receipt Date	2022-11-01	
Date Tested	2022-11-01 TO 2023-06-26	
Applicable Standards	FCC 47 CFR PART 2, PART 25 ISED RSS-GEN ISSUE 5, RSS-170 ISSUE 4	
Test Results	COMPLIES	
UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, any agency of the Federal Government, or any agency of the U.S. government.		
Approved & Released By:	Reviewed By:	Prepared By:
		
Mengistu Mekuria Project Engineer UL Verification Services Inc.	Tewodros Woldemichael Laboratory Engineer UL Verification Services Inc.	Binod Sitaula Lab Engineer Associate UL Verification Services Inc.

2. SUMMARY OF TEST RESULTS

This report contains data provided by the customer which can impact the validity of results. UL Verification Services Inc. is only responsible for the validity of results after the integration of the data provided by the customer."

Below is a list of the data provided by the customer:

1. Antenna gain and type (see section 6.4)

Requirement Description	Band	Requirement Clause Number (FCC)	Requirement Clause Number (ISED)	Result	Remarks
RF Conducted Output Power	53	25.149 (c)(4)(iii)	RSS-170 5.4; SMSE-009-20 Annex A 9.d	Complies	
Equivalent Isotropic Radiated	53	25.149 (c)(4)(iii)	RSS-170 5.4; SMSE-009-20 Annex A 9.e	Complies	
Maximum Power Spectral Density	53	25.149 (c)(4)(iv)	SMSE-009-20 Annex A 9.f	Complies	
Duty Cycle	53	Reporting purpose	Reporting purpose	Complies	
Occupied Bandwidth		2.1049	Reporting purpose	Complies	
6 dB Bandwidth	53	25.149 (c)(4) (ii)	SMSE-009-20 Annex A 9.c	Complies	
Band Edge and Emission Mask	53	2.1051, 25.149 (c) (4) (v), (vi)	RSS-170 5.7.3; SMSE-009-20 Annex A 9.g and h	Complies	
Out of Band Emissions	53	2.1051, 25.149 (c) (4) (v), (vi)	RSS-170 5.7.3; SMSE-009-20 Annex A 9.g, h, and i	Complies	
Frequency Stability	53	25.202 (d)	RSS-170 5.3	Complies	
Field Strength of Spurious Radiation	53	2.1053, 25.149 (c) (4) (v), (vi)	RSS-170 5.7.3; SMSE-009-20 Annex A 9.g, h, and i	Complies	
Carrier-Off-State Emissions Radiation	53	25.216 (i)	RSS-170 5.10	Complies	

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with the following:

- ANSI C63.26:2015
- FCC 47 CFR Part 2 and 25
- [FCC KDB 971168 D01 v03r01](#): Power Meas License Digital Systems
- [FCC KDB 971168 D02 v02r02](#): Misc Rev Approv License Devices
- [FCC KDB 412172 D01 v01r01](#): Determining ERP and EIRP
- ISED RSS-GEN ISSUE 5, RSS-170 ISSUE 4
- SMSE-009-20

4. FACILITIES AND ACCREDITATION

UL Verification Services Inc. is accredited by A2LA, certification #0751.05, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
☒	Building 1: 47173 Benicia Street, Fremont, CA 94538, USA	US0104	2324A	550739
☒	Building 2: 47266 Benicia Street, Fremont, CA 94538, USA			
☐	Building 3: 843 Auburn Court, Fremont, CA 94538, USA			
☒	Building 4: 47658 Kato Rd, Fremont, CA 94538, USA			
☒	Building 5: 47670 Kato Rd, Fremont, CA 94538, USA			

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{Lab}
Conducted Antenna Port Emission Measurement	1.940
Power Spectral Density	2.466
Time Domain Measurements Using SA	3.39
RF Power Measurement Direct Method Using Power Meter	0.450 Peak; 1.300 Ave.
Radio Frequency (Spectrum Analyzer)	141.16 Hz
Occupied Bandwidth	1.22%
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.78 db
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.40 db
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.87 db
Worst Case Radiated Disturbance, 30 to 1000 MHz	6.01 db
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.73 db
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.51 db
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.29 db

Uncertainty figures are valid to a confidence level of 95%.

5.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)
36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

6. EQUIPMENT UNDER TEST

6.1. DESCRIPTION OF EUT

The Apple iPhone is a smartphone with cellular GSM, GPRS, EGPRS, UMTS, LTE, 5G NR1, IEEE 802.11a/b/g/n/ac/ax, Bluetooth (BT), Ultra-Wideband (UWB), GPS, NFC, NB UNII, 802.15.4/802.15ab-NB and MSS technologies. The rechargeable battery is not user accessible.

6.2. MAXIMUM OUTPUT POWER

EIRP/ERP TEST PROCEDURE

ANSI C63.26:2015
KDB 971168 D01 Section 5.6

$$\text{EIRP} = \text{PMeas} + \text{GT} - \text{LC}$$

where: EIRP = effective isotropic radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm);

PMeas = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

EUT includes different power levels for head use configuration and body use configuration and the below tables contain the highest of all configurations average conducted and peak EIRP output powers as follows:

Limit

FCC: §25.149 (c)(4) (iii): The maximum transmit power is no more than 1 W with a peak EIRP of no more than 6 dBW (36dBm or 3.98W).

ISED: SMSE-009-20 Annex A 9.e: The maximum equivalent isotropically radiated power (e.i.r.p.) shall not exceed 6 dBW (36dBm or 3.98W).

LTE BAND 53

FCC Part 25/ SMSE-009-20											
Peak EIRP Limit (W)		3.98									
Conducted Average Limit (W)		1.00									
Antenna Gain (dBi) (Ant 2)		0.60									
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	Conducted Peak (dBm)	EIRP Peak (dBm)	EIRP Peak (W)	99% BW (kHz)	Emission Designator
1.4	QPSK	2484.2	2494.3	20.7	21.30	0.135	24.86	25.46	0.352	1087	1M09G7W
	16QAM			20.7	21.30	0.135	24.61	25.21	0.332	1091	1M09D7W
3.0	QPSK	2485.0	2493.5	20.7	21.30	0.135	24.44	25.04	0.319	2695	2M70G7W
	16QAM			20.7	21.30	0.135	24.55	25.15	0.327	2694	2M69D7W
5.0	QPSK	2486.0	2492.5	20.7	21.30	0.135	24.64	25.24	0.334	4505	4M51G7W
	16QAM			20.7	21.30	0.135	24.80	25.40	0.347	4499	4M50D7W
10.0	QPSK	2488.5	2490.0	20.7	21.30	0.135	24.82	25.42	0.348	8972	8M97G7W
	16QAM			20.7	21.30	0.135	24.83	25.43	0.349	8982	8M98D7W

5G NR n53

FCC Part 25 / SMSE-900-20											
Peak EIRP Limit (W)		3.98									
Conducted Average Limit (W)		1.00									
Antenna Gain (dBi) (Ant 2)		0.60									
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	Conducted Peak (dBm)	EIRP Peak (dBm)	EIRP Peak (W)	99% BW (kHz)	Emission Designator
10.0	BPSK	2488.5	2490.0	20.7	21.30	0.135	24.48	25.08	0.322	8631	8M63G7W
	QPSK			20.7	21.30	0.135	24.55	25.15	0.327	8653	8M65G7W
	16QAM			20.7	21.30	0.135	24.47	25.07	0.321	8593	8M59D7W

6.3. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was version 0.13.02.

6.4. MAXIMUM ANTENNA GAIN

The antenna(s) gain, as provided by the manufacturer' are as follows:

LTE Bands	Frequency Range (MHz)	ANT 1 Antenna Gain (dBi)	ANT 2 Antenna Gain (dBi)
LTE BAND 53, 5G NR N53	2483.5 – 2495 MHz	-5.3	0.6

6.5. WORST-CASE CONFIGURATION AND MODE

The EUT supports the following LTE and 5G NR Bands:
Band 53, and 5G NR n53

BPSK modulation applied only for 5G NR frequencies and has the same tune up power as QPSK modulations.

The DFT-s-OFDM and CP-OFDM waveforms were investigated, and DFT-s-OFDM was found to be the worst case.

The worst-case scenario for all measurements is based on an engineering evaluation made on different modulations. All modulations had the same target power for the worst-case antenna, so QPSK and BPSK were used to represent the worst mode for LTE bands and 5G NR bands respectively and were set for all conducted and radiated tests. Output power measurements were measured on BPSK, QPSK, 16QAM, 64QAM, and 256QAM modulations. For testing purposes emissions on sections 9 were measured while QPSK/BPSK was set at or above target power for all bands. Conducted tests were performed on the worst-case antenna because it has the highest conducted power. The worst-case antenna is shown in the table below.

LTE and 5G NR Bands	Worst case Antenna Port For Conducted Power
LTE BAND 53, and 5G NR n53	Ant 2

The EUT was investigated in three orthogonal orientations X/Y/Z on both ANT 1 and ANT2 antennas to determine the worst-case orientation. The full tests of the EUT have made upon the orientations that shown in the table below.

Frequency Bands	ANT1	ANT2
2300 – 2700 MHz	X	Y


Radiated spurious emissions were investigated from 9kHz to 30MHz, 30MHz-1GHz and above 1GHz. There were no emissions found with less than 20dB of margin from 9kHz to 1GHz.

For simultaneous transmission of multiple channels in the 2.4GHz/5GHz WLAN, UWB, and Cellular bands, tests were conducted for various configurations having the highest power, least separation in frequencies and widest operation bandwidths. No noticeable new emission was found.


6.6. DESCRIPTION OF TEST SETUP

SUPPORT TEST EQUIPMENT						
Description		Manufacturer	Model	Serial Number		FCC ID/ DoC
Laptop		Apple	MacBook Pro	HRP082673		BCGA1708
AC/DC adapter		Apple	A1718	C4H64450HH3GN8RA6		--
I/O CABLES (RF CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	3	US 115V	Un-shielded	2.0	N/A
2	USB	1	DC	Un-shielded	1.0	N/A
3	RF In/Out	1	EUT	Un-shielded	0.6	N/A
4	RF In/Out	1	Communication Test Set	Un-shielded	1.2	N/A
5	RF In/Out	1	Barrel	N/A	N/A	N/A
I/O CABLES (RF RADIATED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF In/Out	1	Antenna	Un-shielded	5.0	N/A

CONDUCTED SETUP

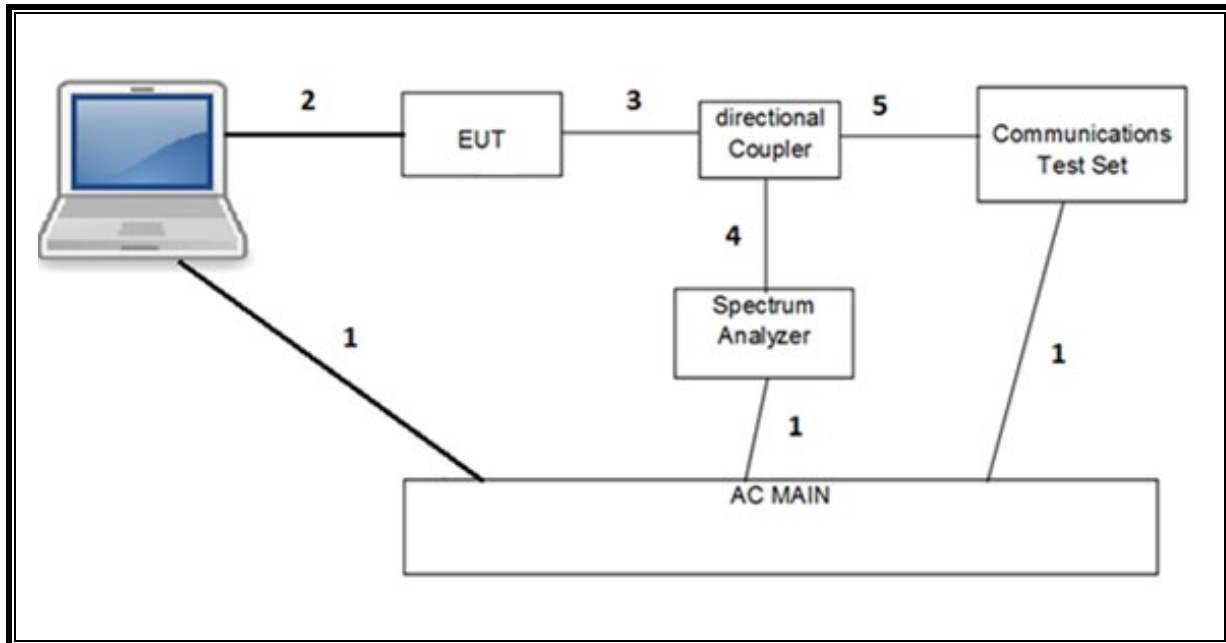

RADIATED SETUP

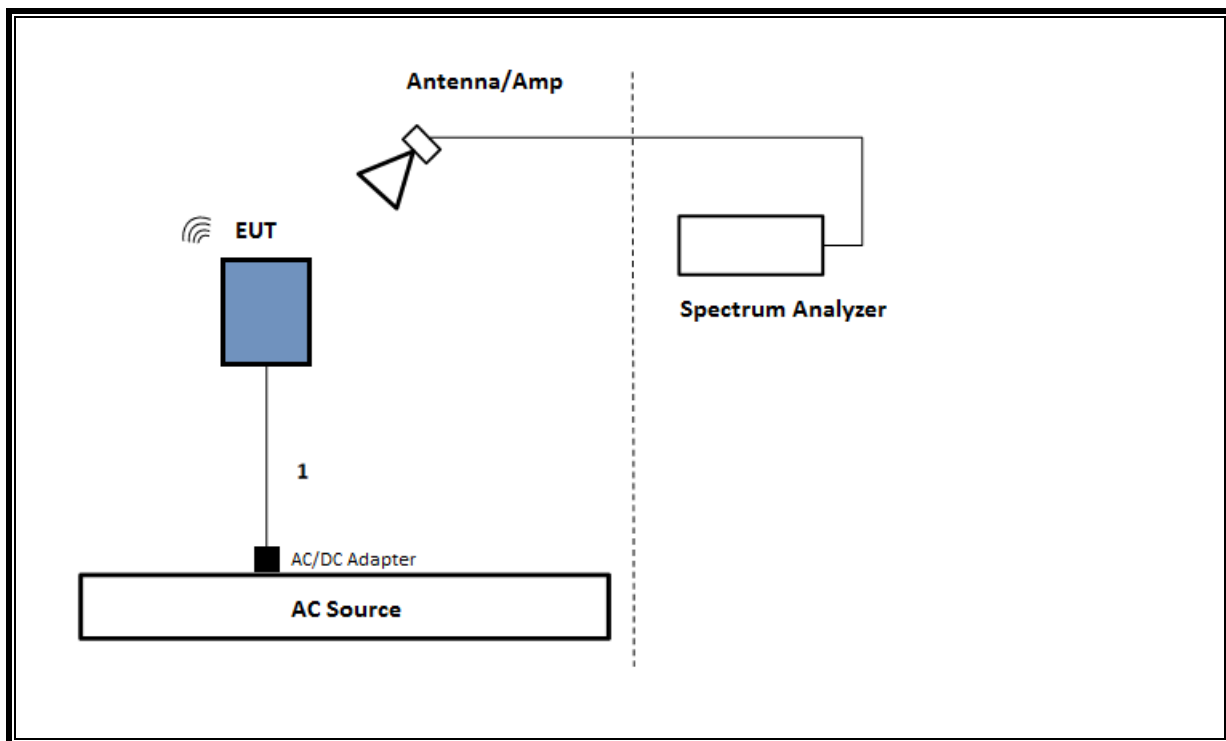

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
*Antenna, Horn 1-18GHz	ETS Lindgren	3117	79834	06/08/2023
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	85151	04/30/2024
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight	N9030A	85313	02/29/2024
Spectrum Analyzer, PXA	Keysight	N9030B	222074	07/16/2023
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight	N9030A	85201	02/29/2024
Spectrum Analyzer, PXA	Keysight	N9030B	85214	07/18/2023
Spectrum Analyzer, PXA	Keysight	N9030B	222073	07/22/2023
PXA Signal Analyzer	Keysight	N9030B	222073	07/22/2023
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	230548	02/29/2024
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	201498	02/29/2024
Directional Coupler	KRYTAR	152610	198816	09/23/2023
Directional Coupler	KRYTAR	152610	198817	09/23/2023
Directional Coupler	KRYTAR	152610	135712	09/23/2023
Power Meter, P-series single channel	Keysight	N1912A	90630	01/24/2024
Power Meter, P-series single channel	Keysight	N1912A	90719	01/31/2024
Power Meter, P-series single channel	Agilent	N1911A	82174	01/31/2024
Power Sensor,P – series, 50MHz to 18GHz, Wideband	Keysight	N1921A	90389	01/31/2024
Wideband Communication Test Set, Call Box	Rohde & Schwarz	CMW500	222792	02/29/2024
Wideband Communication Test Set, Call Box	Rohde & Schwarz	CMW500	230298	02/29/2024
Wideband Communication Test Set, Call Box	Rohde & Schwarz	CMW500	230295	02/29/2024
*5G NR Communication Test Set, Call Box	Keysight	UXM	207269	01/31/2024
*5G NR Communication Test Set, Call Box	Keysight	UXM	199836	01/31/2024
*Chamber, Environmental	Cincinnati Sub Zero	ZPHS-8-3.5-SCT/WC	82472	11/16/2023
*Amplifier, 218GHz to 26.5GHz	Ampical	AMP18G26.5-60	215705	02/26/2023
*Amplifier, 26.5GHz to 40GHz	Ampical	AMP26G40-65	172346	02/29/20224
Antenna, Horn 18 to 26.5GHz	ARA	MWH-1826/B	172362	03/31/2024
Antenna, Horn 26.5GHz to 40GHz	ARA	MWH-2640/B	172365	03/31/2024
*Antenna, Active Loop 100KHz to 30MHz	ELECTRO-METRICS	EM-6872	219911	05/10/2023
*Antenna, Active Loop 30Hz to 1MHz	ELECTRO-METRICS	EM-6871	219909	05/10/2023
10dB Fixed Attenuator	Pasternack Enterprises	PE7087-10	236360	N/A
10dB Fixed Attenuator	Pasternack Enterprises	PE7087-10	236285	N/A
10dB Fixed Attenuator	Pasternack Enterprises	PE7087-10	236355	N/A
UL AUTOMATION SOFTWARE				
CLT Software	UL	UL RF	Ver 3.4, May 20, 2022	
Power Measurement Software	UL	UL RF	Ver 3.1.4, April 29, 2022	
Radiated test software	UL	UL RF	Ver 9.5, Jan 21, 2022	

NOTES:

1. * Testing is completed before equipment expiration date.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

8. RF OUTPUT POWER VERIFICATION

LIMITS

FCC: §25.204

(a) In bands shared coequally with terrestrial radio communication services, the equivalent isotropically radiated power transmitted in any direction towards the horizon by an earth station, other than an ESV, operating in frequency bands between 1 and 15 GHz, shall not exceed the following limits except as provided for in paragraph (c) of this section:

+ 40 dBW in any 4 kHz band for $\theta \leq 0^\circ$

+ 40 + 3 θ dBW in any 4 kHz band for $0^\circ < \theta \leq 5^\circ$

where θ is the angle of elevation of the horizon viewed from the center of radiation of the antenna of the earth station and measured in degrees as positive above the horizontal plane and negative below it.

ISED RSS-170:

5.3.2 Mobile Earth Stations (MESs)

The application for MES certification shall state the MES e.i.r.p. that is necessary for satisfactory communication. The maximum permissible e.i.r.p. will be the stated e.i.r.p. plus a 2 dB margin. If a detachable antenna is used, the certification application shall state the recommended antenna type and manufacturer, the antenna gain and the maximum transmitter output power at the antenna terminal.

TEST PROCEDURE

The transmitter output is connected to a wideband power meter/sensor which is greater than the occupied bandwidth as worst-case scenario, also the total power readings still comply with the required limit.

The cable assembly insertion loss of 13.2 dB (ANT 1) / 12.32 dB (ANT 4) (including 10.70 dB coupler and 2.5 dB cable (ANT 1) / 10 dB pad and 2.32 dB cable (ANT 4)) was entered as an offset in the power meter to allow for a gated average reading of power.

RULE PART(S) AND LIMITS

FCC: §25.149 (c)(4) (iii): The maximum transmit power is no more than 1 W (30dBm) with a peak EIRP of no more than 6 dBW.

ISED: SMSE-009-20 Annex A 9.d: Transmitter output power shall not exceed 0 dBW (30dBm).

RESULTS

EUT includes different power levels for head use configuration and body use configuration and the below tables contain the highest of all configurations average and peak conducted output powers as follows:

8.1. LTE BAND 53

Test Engineer ID:	25780	Test Date:	12/13/2022
-------------------	-------	------------	------------

OUTPUT POWER FOR LTE BAND 53 (1.4 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Ant 1			Ant 2			Ant 1			Ant 2		
				Conducted Average (dBm)			Conducted Average (dBm)			Conducted Peak (dBm)			Conducted Peak (dBm)		
				60147	60195	60248	60147	60195	60248	60147	60195	60248	60147	60195	60248
1.4	QPSK	1	0	20.58	20.64	20.67	20.57	20.67	20.70	24.02	24.08	24.12	24.05	24.14	24.17
		1	2	20.63	20.68	20.68	20.62	20.67	20.67	23.97	24.02	24.05	24.00	24.06	24.07
		1	5	20.63	20.66	20.66	20.60	20.64	20.64	24.06	24.10	24.14	24.10	24.13	24.14
		3	0	20.60	20.62	20.69	20.62	20.64	20.66	24.41	24.43	24.52	24.48	24.51	24.51
		3	1	20.61	20.66	20.69	20.62	20.67	20.68	24.26	24.30	24.38	24.33	24.39	24.41
		3	2	20.62	20.66	20.70	20.63	20.66	20.70	24.28	24.33	24.40	24.37	24.37	24.44
	16QAM	6	0	19.94	19.97	19.99	19.61	19.65	19.67	25.06	25.06	25.14	24.75	24.72	24.86
		1	0	20.52	20.48	20.52	20.64	20.69	20.65	24.39	24.41	24.42	24.26	24.30	24.32
		1	2	20.52	20.50	20.70	20.70	20.68	20.57	24.30	24.32	24.53	24.23	24.22	24.11
		1	5	20.56	20.65	20.51	20.67	20.56	20.59	24.39	24.54	24.45	24.31	24.16	24.19
		3	0	20.31	20.33	20.51	20.47	20.50	20.50	24.51	24.54	24.73	24.42	24.41	24.42
		3	1	20.35	20.45	20.52	20.32	20.50	20.54	24.45	24.57	24.66	24.16	24.33	24.35
	64QAM	3	2	20.33	20.33	20.49	20.33	20.51	20.36	24.42	24.43	24.62	24.17	24.34	24.21
		6	0	19.28	19.29	19.30	19.30	19.31	19.34	24.87	24.85	24.90	24.61	24.57	24.60
		1	0	20.48	20.60	20.46	20.54	20.49	20.65	24.20	24.28	24.27	23.99	23.98	24.06
		1	2	20.56	20.59	20.70	20.66	20.70	20.56	24.14	24.17	24.37	23.96	23.95	23.99
		1	5	20.56	20.62	20.66	20.57	20.58	20.66	24.25	24.27	24.38	24.03	23.99	24.09
		3	0	20.54	20.50	20.42	20.47	20.49	20.58	24.40	24.41	24.43	24.15	24.22	24.21
	256QAM	3	1	20.51	20.50	20.51	20.51	20.51	20.48	24.37	24.33	24.41	24.09	24.13	24.15
		3	2	20.54	20.53	20.45	20.42	20.55	20.58	24.33	24.37	24.39	24.10	24.11	24.14
		6	0	19.39	19.47	19.45	19.41	19.46	19.43	24.46	24.49	24.65	24.32	24.22	24.30
		1	0	20.62	20.62	20.68	19.62	19.61	19.66	22.34	22.06	22.38	22.04	22.04	22.06
		1	2	20.63	20.64	20.64	19.57	19.67	19.70	22.20	22.63	22.37	22.04	22.06	21.81
		1	5	20.48	20.43	20.70	19.58	19.62	19.64	22.03	22.60	22.25	22.03	21.96	22.06
3		0	20.58	20.60	20.62	19.58	19.60	19.64	22.87	22.81	22.89	22.67	22.59	22.68	
3		1	20.54	20.63	20.63	19.56	19.61	19.63	22.63	22.81	22.83	22.48	22.54	22.64	
256QAM	3	2	20.58	20.58	20.63	19.54	19.60	19.63	22.84	22.58	22.88	22.38	22.64	22.68	
	6	0	20.50	20.48	20.38	19.48	19.48	19.48	23.85	22.73	22.72	23.22	22.71	22.51	

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Ant 1			Ant 2			Ant 1			Ant 2		
				Conducted Average (dBm)			Conducted Average (dBm)			Conducted Peak (dBm)			Conducted Peak (dBm)		
				60155 2485.0 MHz	60195 2489.0 MHz	60240 2493.5 MHz	60155 2485.0 MHz	60195 2489.0 MHz	60240 2493.5 MHz	60155 2485.0 MHz	60195 2489.0 MHz	60240 2493.5 MHz	60155 2485.0 MHz	60195 2489.0 MHz	60240 2493.5 MHz
3.0	QPSK	1	0	20.57	20.56	20.60	20.52	20.56	20.59	24.05	24.06	24.10	24.02	24.08	24.07
		1	7	20.68	20.67	20.70	20.63	20.65	20.70	24.04	24.04	24.10	24.04	24.08	24.10
		1	14	20.59	20.59	20.59	20.53	20.55	20.66	24.02	24.05	24.11	24.08	24.09	24.16
		8	0	19.94	20.00	20.02	19.66	19.70	19.70	24.53	24.57	24.61	24.29	24.33	24.33
		8	4	20.01	20.04	20.05	19.64	19.74	19.73	24.61	24.63	24.66	24.32	24.39	24.40
		8	7	20.00	20.03	20.05	19.62	19.73	19.75	24.58	24.59	24.64	24.26	24.36	24.41
	16QAM	15	0	19.94	20.00	20.00	19.59	19.68	19.69	24.67	24.67	24.73	24.33	24.42	24.44
		1	0	20.57	20.54	20.59	20.50	20.53	20.59	24.40	24.45	24.44	24.14	24.20	24.18
		1	7	20.67	20.70	20.70	20.59	20.60	20.70	24.36	24.48	24.48	24.13	24.15	24.16
		1	14	20.60	20.55	20.58	20.48	20.54	20.60	24.39	24.46	24.50	24.17	24.19	24.21
		8	0	19.34	19.37	19.39	19.35	19.41	19.37	24.54	24.56	24.58	24.33	24.35	24.36
		8	4	19.36	19.45	19.43	19.29	19.41	19.39	24.53	24.56	24.59	24.24	24.33	24.34
	64QAM	8	7	19.38	19.45	19.44	19.30	19.43	19.40	24.52	24.56	24.59	24.25	24.33	24.34
		15	0	19.32	19.36	19.39	19.23	19.34	19.35	24.73	24.76	24.82	24.43	24.55	24.53
		1	0	20.56	20.57	20.58	20.51	20.67	20.64	24.27	24.28	24.30	23.94	24.03	24.05
		1	7	20.68	20.57	20.70	20.69	20.68	20.68	24.24	24.21	24.29	24.00	24.01	24.06
		1	14	20.54	20.61	20.64	20.57	20.70	20.67	24.23	24.24	24.34	24.01	24.08	24.10
		8	0	19.47	19.52	19.51	19.48	19.54	19.55	24.38	24.39	24.43	24.14	24.19	24.16
	256QAM	8	4	19.54	19.53	19.59	19.49	19.58	19.57	24.36	24.34	24.40	24.08	24.18	24.17
		8	7	19.52	19.51	19.56	19.46	19.56	19.61	24.37	24.42	24.44	24.09	24.19	24.21
		15	0	19.48	19.54	19.54	19.47	19.51	19.55	24.65	24.69	24.75	24.36	24.42	24.41
		1	0	20.56	20.57	20.59	19.54	19.60	19.56	22.43	22.34	22.34	21.90	22.04	22.08
		1	7	20.68	20.66	20.70	19.61	19.75	19.72	22.33	22.06	22.52	22.11	22.20	22.31
		1	14	20.54	20.61	20.61	19.50	19.66	19.62	22.06	22.21	22.40	22.01	22.06	22.10
	8	0	20.49	20.50	20.58	19.53	19.52	19.58	22.89	22.98	22.89	22.73	22.76	22.92	
	8	4	20.53	20.58	20.60	19.49	19.59	19.63	22.96	23.04	22.99	22.73	23.00	22.80	
	8	7	20.57	20.55	20.60	19.50	19.57	19.59	22.99	22.88	23.07	22.67	22.62	22.82	
	15	0	20.50	20.52	20.54	19.43	19.54	19.55	23.06	23.12	23.17	22.82	22.84	22.82	

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Ant 1			Ant 2			Ant 1			Ant 2		
				Conducted Average (dBm)			Conducted Average (dBm)			Conducted Peak (dBm)			Conducted Peak (dBm)		
				60165	60195	60230	60165	60195	60230	60165	60195	60230	60165	60195	60230
5.0	QPSK	1	0	20.53	20.53	20.52	20.51	20.55	20.57	24.07	24.03	24.04	24.02	24.05	24.08
		1	12	20.68	20.67	20.70	20.65	20.70	20.68	24.11	24.05	24.12	24.08	24.11	24.14
		1	24	20.56	20.58	20.63	20.58	20.62	20.63	24.03	24.05	24.14	24.11	24.14	24.17
		12	0	19.90	19.90	19.86	19.62	19.63	19.66	24.48	24.47	24.41	24.21	24.23	24.24
		12	6	19.86	19.97	19.88	19.64	19.70	19.70	24.36	24.45	24.37	24.15	24.26	24.24
		12	11	19.87	19.95	19.99	19.66	19.67	19.68	24.42	24.46	24.50	24.22	24.25	24.26
		25	0	19.84	19.92	19.88	19.61	19.66	19.66	24.85	24.87	24.79	24.58	24.64	24.61
		1	0	20.54	20.51	20.46	20.50	20.55	20.52	24.35	24.39	24.36	24.05	24.12	24.09
	16QAM	1	12	20.70	20.66	20.64	20.57	20.65	20.70	24.37	24.42	24.48	24.11	24.21	24.21
		1	24	20.59	20.58	20.58	20.54	20.56	20.60	24.30	24.39	24.48	24.12	24.16	24.20
		12	0	19.32	19.32	19.26	19.37	19.29	19.41	24.49	24.56	24.38	24.30	24.20	24.39
		12	6	19.29	19.35	19.30	19.41	19.34	19.45	24.25	24.43	24.30	24.17	24.18	24.26
		12	11	19.27	19.34	19.37	19.41	19.32	19.44	24.29	24.49	24.44	24.24	24.21	24.33
		25	0	19.22	19.31	19.23	19.26	19.33	19.32	24.88	24.95	24.99	24.80	24.78	24.71
		1	0	20.58	20.55	20.55	20.60	20.60	20.65	24.20	24.25	24.19	23.96	23.96	23.99
		1	12	20.60	20.63	20.70	20.67	20.68	20.66	24.21	24.21	24.25	23.97	23.96	23.99
	64QAM	1	24	20.63	20.66	20.65	20.58	20.69	20.70	24.15	24.23	24.29	23.98	24.08	24.10
		12	0	19.43	19.44	19.38	19.45	19.44	19.49	24.34	24.33	24.28	24.13	24.10	24.15
		12	6	19.38	19.49	19.42	19.47	19.50	19.50	24.19	24.29	24.24	24.08	24.08	24.09
		12	11	19.38	19.46	19.48	19.49	19.49	19.51	24.22	24.30	24.34	24.11	24.11	24.14
		25	0	19.36	19.44	19.40	19.45	19.47	19.48	24.57	24.66	24.62	24.45	24.49	24.45
		1	0	20.57	20.61	20.52	19.62	19.69	19.66	22.34	22.37	22.22	21.96	22.09	22.02
		1	12	20.64	20.68	20.70	19.69	19.72	19.72	22.30	22.27	22.34	22.01	22.05	22.09
		1	24	20.53	20.66	20.63	19.58	19.68	19.70	22.12	22.30	22.30	22.06	22.07	22.20
	256QAM	12	0	20.46	20.50	20.44	19.50	19.54	19.57	23.09	23.17	23.12	22.85	22.91	23.02
		12	6	20.48	20.52	20.51	19.55	19.57	19.59	23.05	23.16	23.09	22.93	22.97	23.03
		12	11	20.43	20.53	20.54	19.56	19.56	19.57	23.04	23.17	23.20	22.95	22.95	22.99
		25	0	20.42	20.52	20.44	19.52	19.54	19.55	23.21	23.28	23.29	23.02	23.13	23.05

OUTPUT POWER FOR LTE BAND 53 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Ant 1			Ant 2			Ant 1			Ant 2		
				Conducted Average (dBm)			Conducted Average (dBm)			Conducted Peak (dBm)			Conducted Peak (dBm)		
				60190	60195	60205	60190	60195	60205	60190	60195	60205	60190	60195	60205
10.0	QPSK	1	0	20.62	20.61	20.59	20.60	20.57	20.53	24.15	24.23	24.22	24.09	24.19	24.19
		1	24	20.68	20.68	20.65	20.70	20.66	20.67	24.07	24.19	24.17	24.12	24.24	24.28
		1	49	20.70	20.69	20.68	20.69	20.66	20.64	24.10	24.20	24.21	24.17	24.29	24.30
		25	0	20.01	20.04	20.02	19.67	19.69	19.68	24.60	24.66	24.62	24.31	24.35	24.32
		25	12	20.06	20.07	20.04	19.74	19.73	19.73	24.57	24.63	24.62	24.32	24.35	24.34
		25	24	20.08	20.09	20.08	19.73	19.76	19.73	24.64	24.68	24.65	24.34	24.38	24.36
		50	0	20.03	20.04	20.03	19.70	19.72	19.71	25.11	25.15	25.15	24.81	24.82	24.82
	16QAM	1	0	20.57	20.49	20.56	20.61	20.66	20.53	24.53	24.61	24.66	24.16	24.33	24.22
		1	24	20.65	20.58	20.56	20.67	20.64	20.54	24.43	24.50	24.50	24.16	24.26	24.20
		1	49	20.67	20.64	20.70	20.70	20.63	20.66	24.48	24.64	24.69	24.26	24.33	24.41
		25	0	19.30	19.29	19.31	19.36	19.39	19.35	24.70	24.70	24.66	24.44	24.48	24.48
		25	12	19.34	19.34	19.37	19.41	19.43	19.38	24.48	24.52	24.52	24.23	24.24	24.22
		25	24	19.36	19.36	19.37	19.42	19.45	19.39	24.76	24.83	24.75	24.48	24.52	24.52
		50	0	19.32	19.34	19.33	19.36	19.38	19.37	25.09	25.13	25.12	24.81	24.83	24.82
	64QAM	1	0	20.64	20.55	20.63	20.51	20.50	20.57	24.57	24.41	24.45	24.04	23.99	24.10
		1	24	20.66	20.70	20.68	20.60	20.70	20.63	24.47	24.35	24.32	24.13	24.14	24.09
		1	49	20.68	20.69	20.69	20.65	20.63	20.63	24.45	24.34	24.39	24.13	24.16	24.18
		25	0	19.53	19.55	19.51	19.45	19.47	19.45	24.47	24.45	24.43	24.21	24.19	24.16
		25	12	19.59	19.59	19.57	19.51	19.49	19.50	24.39	24.38	24.36	24.13	24.10	24.12
		25	24	19.59	19.59	19.58	19.51	19.54	19.52	24.50	24.53	24.50	24.24	24.25	24.25
		50	0	19.57	19.57	19.55	19.50	19.49	19.48	24.87	24.89	24.86	24.61	24.60	24.58
	256QAM	1	0	20.61	20.47	20.54	19.50	19.52	19.57	22.42	22.59	22.55	22.03	22.10	21.95
		1	24	20.60	20.56	20.65	19.60	19.68	19.65	22.33	22.27	22.34	22.11	22.14	22.40
		1	49	20.70	20.56	20.60	19.65	19.66	19.66	22.36	22.25	22.42	22.15	22.26	22.07
		25	0	20.48	20.49	20.47	19.53	19.55	19.51	23.49	23.53	23.51	23.26	23.23	23.29
		25	12	20.53	20.54	20.52	19.58	19.59	19.59	23.59	23.59	23.51	23.37	23.38	23.34
		25	24	20.54	20.53	20.51	19.60	19.59	19.58	23.56	23.58	23.57	23.36	23.28	23.33
		50	0	20.51	20.51	20.51	19.55	19.56	19.53	23.67	23.70	23.69	23.38	23.42	23.43

8.2. 5G NR n53

Test Engineer ID:	32061	Test Date:	12/2/2022
-------------------	-------	------------	-----------

OUTPUT POWER FOR 5G NR n53 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Ant 1			Ant 2			Ant 1			Ant 2		
				Conducted Average (dBm)			Conducted Average (dBm)			Conducted Peak (dBm)			Conducted Peak (dBm)		
				497700	497800	498000	497700	497800	498000	497700	497800	498000	497700	497800	498000
10.0	BPSK	1	0	20.49	20.34	20.40	20.50	20.62	20.67	25.19	25.36	25.46	24.18	24.39	24.43
			1	20.52	20.46	20.64	20.52	20.64	20.67	25.33	25.43	25.49	24.10	24.40	24.48
			22	20.70	20.54	20.66	20.64	20.68	20.70	25.19	25.42	25.54	24.16	24.46	24.39
			23	20.40	20.29	20.45	20.58	20.67	20.70	25.10	25.43	25.54	24.14	24.36	24.38
			6	20.52	20.56	20.56	20.59	20.62	20.61	25.37	25.52	25.52	24.21	24.37	24.42
			0	20.37	20.36	20.38	20.59	20.64	20.64	25.31	25.37	25.50	24.22	24.39	24.39
	QPSK	1	0	19.88	19.92	19.98	20.66	20.62	20.56	25.03	25.06	25.17	23.96	24.19	24.20
			1	20.55	20.53	20.62	20.58	20.56	20.64	25.32	25.46	25.46	24.37	24.50	24.55
			22	20.62	20.66	20.70	20.67	20.69	20.70	25.32	25.50	25.56	24.37	24.48	24.53
			23	19.83	19.88	19.91	20.50	20.63	20.62	25.11	25.15	25.18	23.89	24.08	24.24
			6	20.58	20.58	20.57	20.55	20.59	20.53	25.43	25.55	25.48	24.22	24.45	24.44
			0	19.92	19.86	19.89	20.59	20.59	20.67	25.05	25.17	25.24	23.96	24.07	24.10
	16QAM	1	0	19.48	19.58	19.77	20.48	20.22	20.09	23.93	24.29	24.18	23.13	22.93	23.35
			1	20.64	20.62	20.69	20.70	20.10	20.40	25.23	25.02	25.03	24.08	24.47	24.10
			22	20.56	20.55	20.70	20.31	20.40	20.14	24.99	25.27	25.44	24.14	24.14	24.20
			23	19.59	19.48	19.55	20.23	20.34	20.19	23.87	23.87	24.23	22.93	23.28	22.90
			6	20.47	20.55	20.41	20.33	20.33	20.34	25.10	25.22	25.26	23.89	24.08	24.10
			0	19.49	19.50	19.54	20.26	20.35	20.31	24.18	24.25	24.20	22.98	23.04	23.08
	64QAM	1	0	20.19	20.54	20.33	20.33	20.49	20.30	23.58	23.33	23.84	22.49	22.60	22.61
			1	20.14	20.44	20.34	20.13	20.45	20.36	23.60	23.72	23.84	22.25	22.75	22.58
			22	20.33	20.52	20.33	20.70	20.47	20.47	23.52	23.46	23.50	22.37	22.62	22.71
			23	20.21	20.48	20.32	20.49	20.61	20.45	23.73	23.68	23.64	22.13	22.34	22.63
			6	20.59	20.64	20.57	20.48	20.39	20.40	23.65	23.66	23.74	22.54	22.55	22.68
			0	20.70	20.67	20.61	20.39	20.42	20.39	23.64	23.74	23.78	22.53	22.58	22.55
	256QAM	1	0	20.55	20.59	20.46	20.39	20.35	20.48	21.43	21.72	21.82	20.77	20.32	20.89
			1	20.55	20.56	20.43	20.67	20.42	20.68	21.66	21.62	21.85	20.46	20.18	20.72
			22	20.53	20.68	20.50	20.67	20.39	20.63	21.85	21.80	21.64	20.59	20.44	20.71
			23	20.51	20.55	20.46	20.48	20.44	20.70	21.62	21.86	21.70	20.83	20.50	20.50
			6	20.56	20.62	20.60	20.36	20.38	20.41	21.56	21.73	21.69	20.45	20.60	20.59
			0	20.65	20.57	20.70	20.33	20.42	20.36	21.62	21.70	21.79	20.47	20.61	20.70

9. CONDUCTED TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS


None; for reporting purposes only.


PROCEDURE

Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Band	RB Allocation / Offset	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
LTE Band 53	1 / 0	0.998	4.997	0.20	19.96	7.00
LTE Band 53	50 / 0	0.992	4.997	0.20	19.85	7.02
5G NR n53	1 / 1	N.A.	N.A.	1.00	100.00	0.00
5G NR n53	24 / 0	N.A.	N.A.	1.00	100.00	0.00

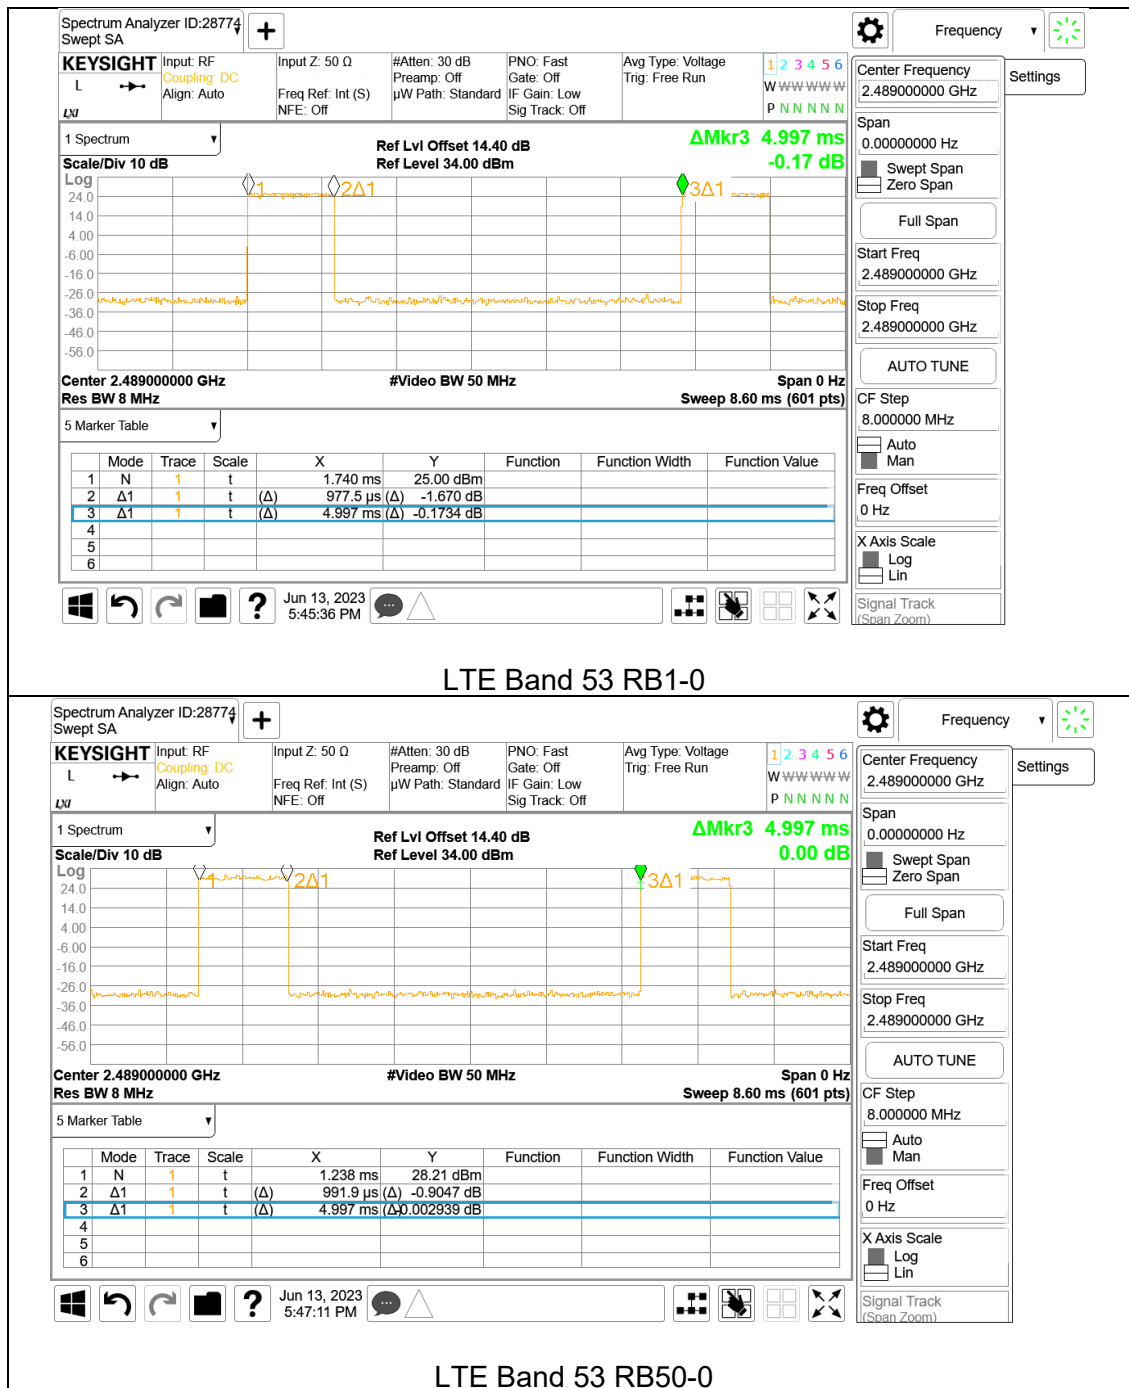

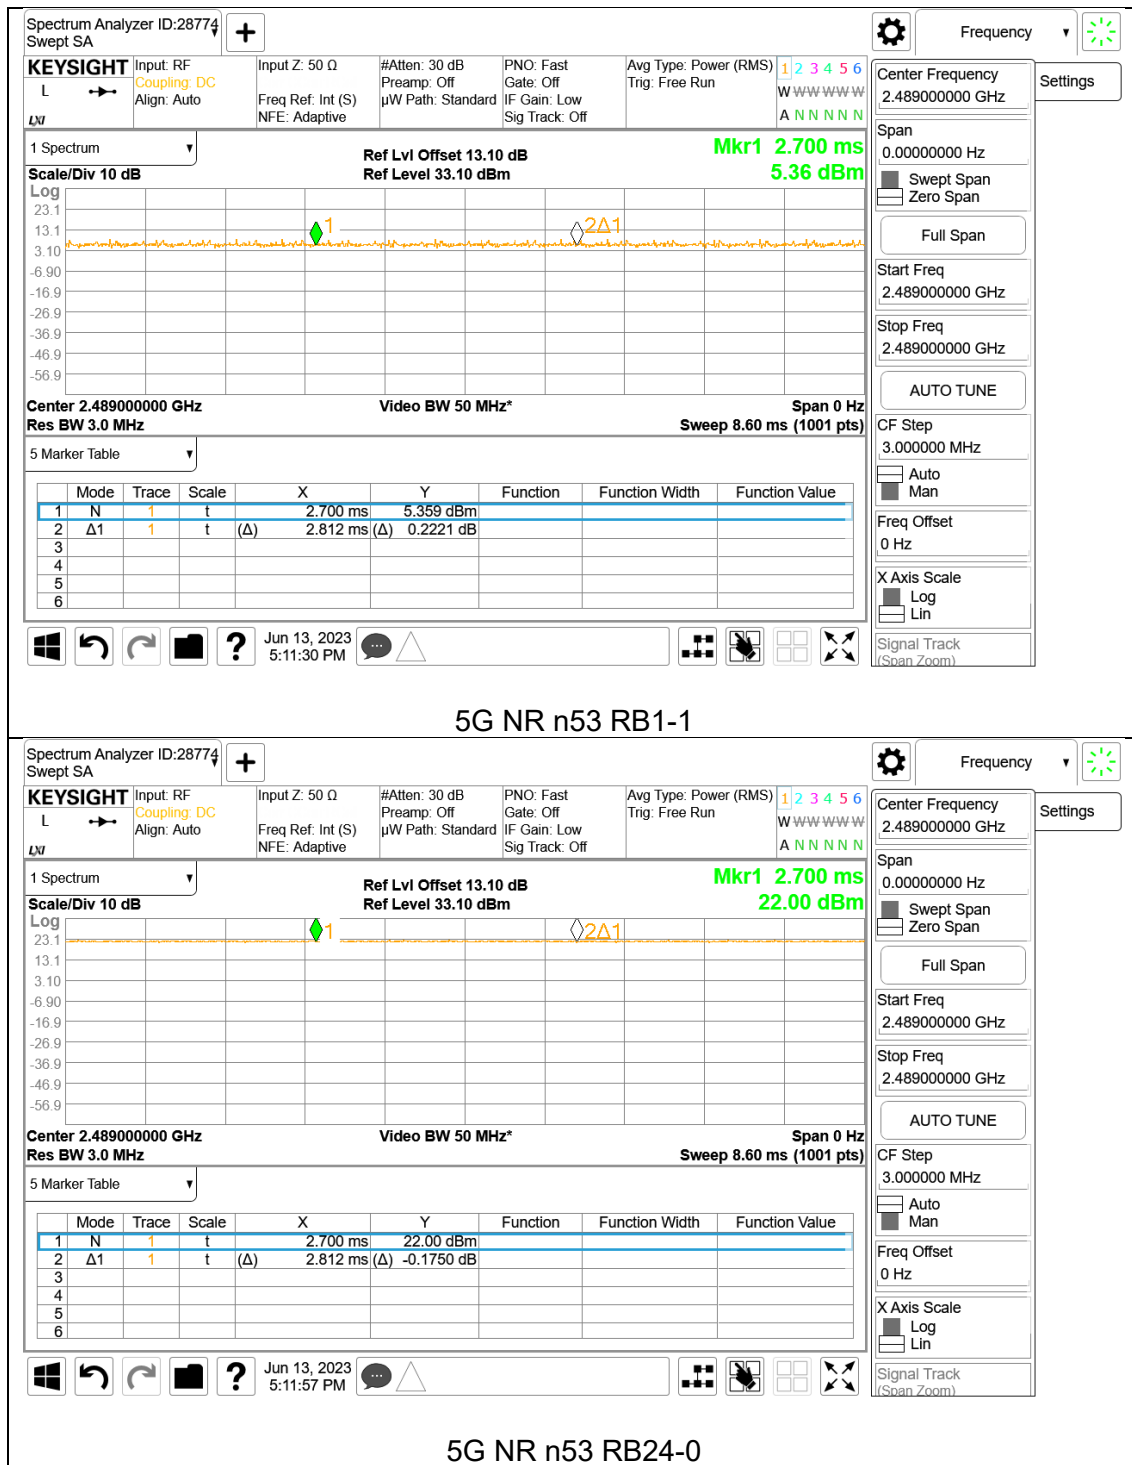

9.2. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049
ISED RSS-170 and RSS-GEN

LIMITS

For reporting purposes only.

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the middle channel in each band. The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times$ RBW. The 99% bandwidths were measured and recorded.

RESULTS

There is no limit required; therefore, only one port of higher power, ANT1, was tested.


LTE BAND 53

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 53	1.4MHz, QPSK	6/0	2489.0	1.087	1.33
	1.4MHz, 16QAM			1.091	1.27
	3MHz, QPSK	15/0		2.695	3.03
	3MHz, 16QAM			2.694	3.02
	5MHz, QPSK	25/0		4.505	5.17
	5MHz, 16QAM			4.499	5.17
	10MHz, QPSK	50/0		8.972	9.78
	10MHz, 16QAM			8.982	9.80
	10MHz, QPSK	1/0		0.245	0.40


5G NR n53

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
5G NR n53	10MHz, BPSK	24/0	2489.0	8.631	9.73
	10MHz, QPSK			8.653	9.91
	10MHz, 16QAM			8.593	9.82
	10MHz, QPSK	1/0		0.481	0.75


9.2.1. LTE BAND 53

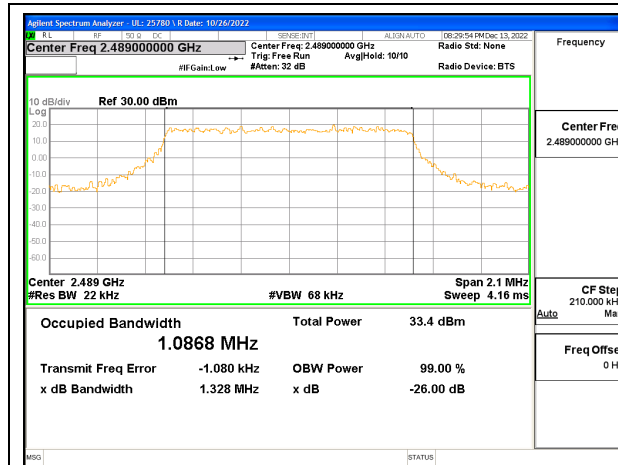


LTE B53 1.4MHz QPSK Middle Channel RB6-0

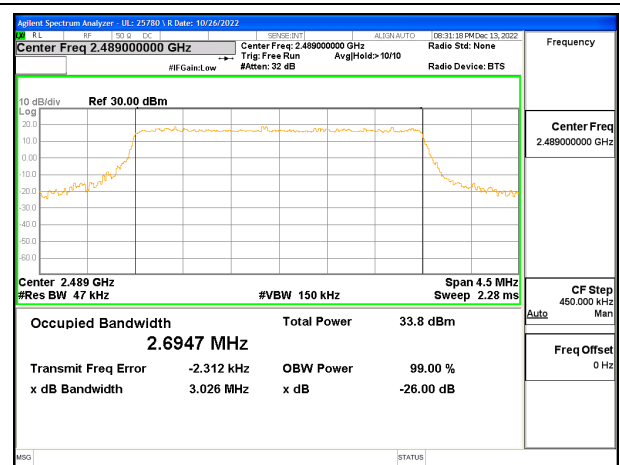


LTE B53 3MHz QPSK Middle Channel RB15-0

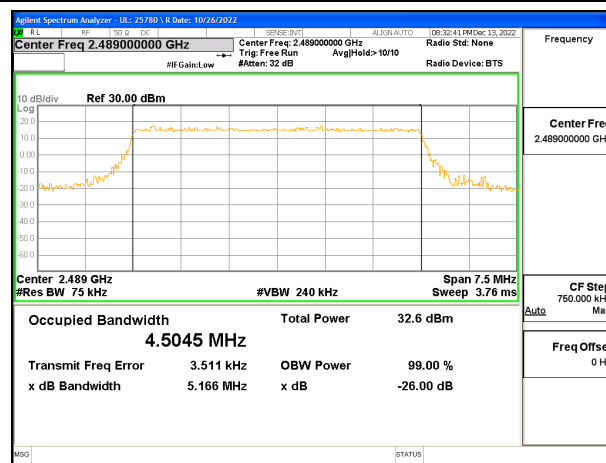

LTE B53 5MHz QPSK Middle Channel RB25-0

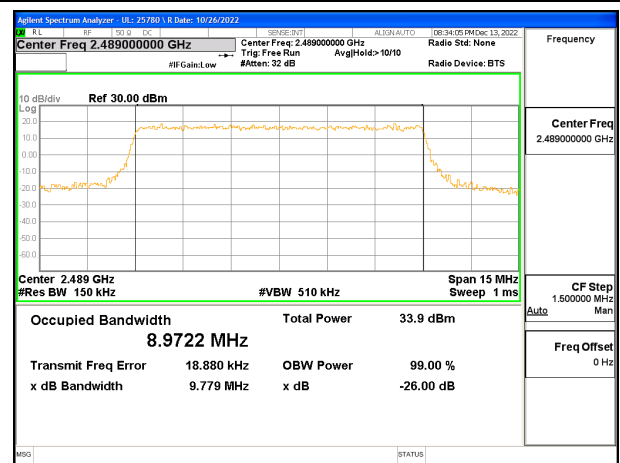


LTE B53 10MHz QPSK Middle Channel RB50-0

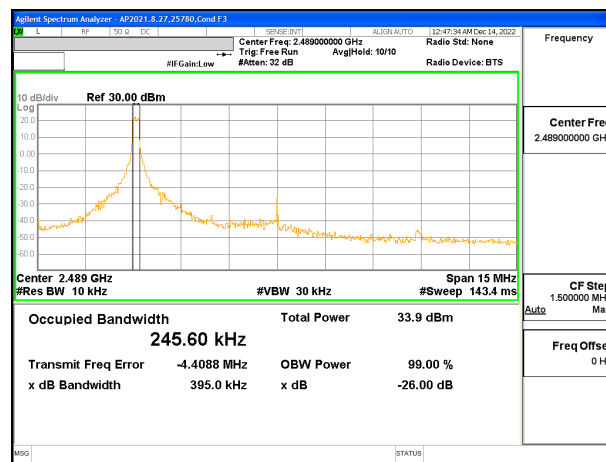

LTE B53 10MHz QPSK Middle Channel RB1-0

Intentionally Blank

9.2.2. 5G NR n53

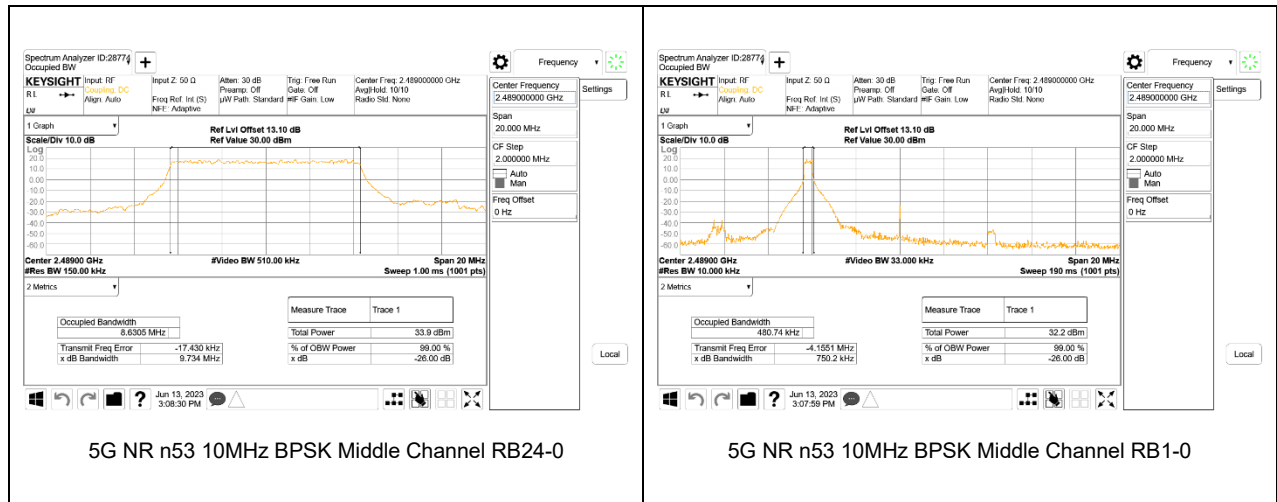

9.3. MAXIMUM POWER SPECTRAL DENSITY

RULE PART(S)

FCC: §25.149 (c)(4) (iv)
ISED: SMSE-009-20 Annex A 9.f

LIMITS

FCC: The maximum power spectral density conducted to the antenna is not greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission;

ISED: The equipment's maximum power spectral density conducted to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The PSD was measured with the spectrum analyzer at the low/ middle/high channel in each band where RBW=3kHz, VBW ≥ 3 * RBW, detector= RMS (power averaging).

Note: The PSD measured values are corrected by duty cycle correction factors values that shows in section 9.1.

RESULTS


LTE BAND 53

Band	Mode	RB Allocation/RB Offset	f(MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)
LTE BAND 53	1.4MHz, QPSK	1/0	2484.2	5.786	8.0
			2489.0	6.011	
			2494.3	5.987	
	3MHz, QPSK	1/0	2485.0	5.989	
			2489.0	5.874	
			2493.5	6.118	
	5MHz, QPSK	1/0	2486.0	6.107	
			2489.0	6.207	
			2492.5	5.768	
	10MHz, QPSK	1/0	2488.5	5.752	
			2489.0	5.807	
			2490.0	6.174	
		50/0	2488.5	-10.651	
			2489.0	-10.694	
			2490.0	-11.156	


5G NR n53

Band	Mode	RB Allocation/RB Offset	f(MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)
5G NR n53	10MHz, BPSK	1/1	2488.5	7.316	8.0
			2489.0	6.994	
			2490.0	7.389	
		24/0	2488.5	-0.803	
			2489.0	-0.878	
			2490.0	0.119	


9.3.1. LTE BAND 53

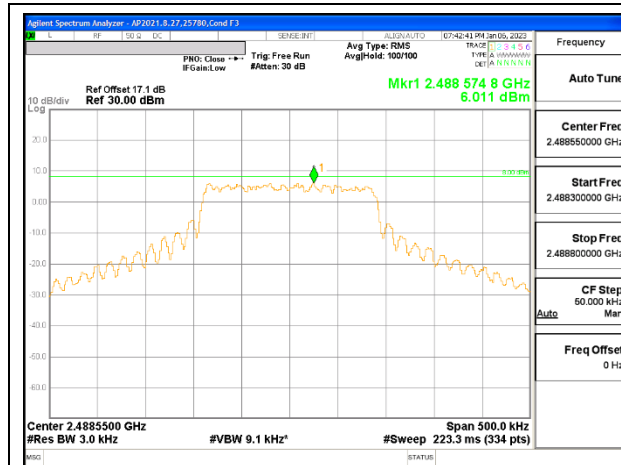


LTE B53 1.4MHz QPSK Middle Channel RB1-0

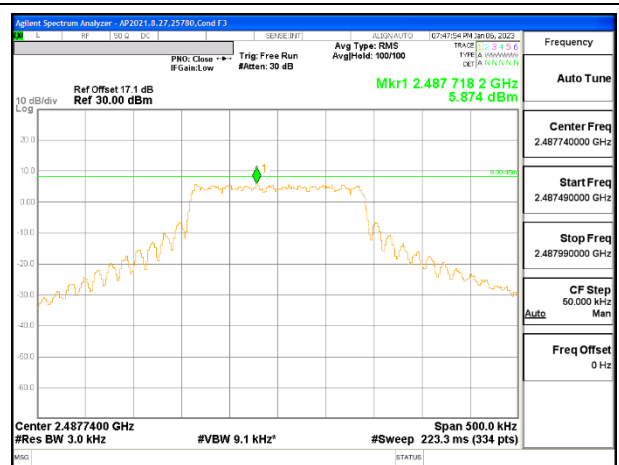


LTE B53 3MHz QPSK Middle Channel RB1-0

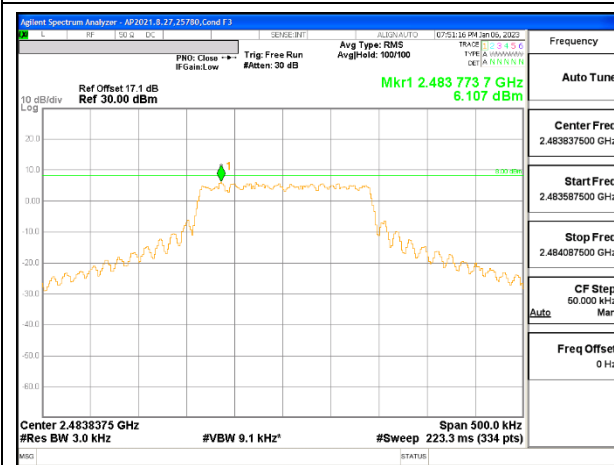

LTE B53 5MHz QPSK Middle Channel RB1-0

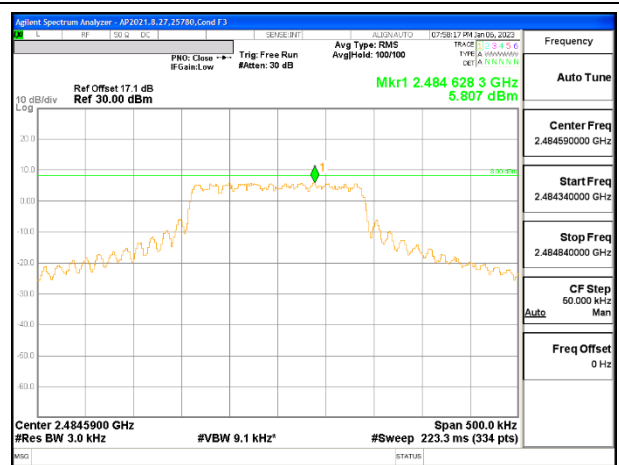


LTE B53 10MHz QPSK Middle Channel RB1-0

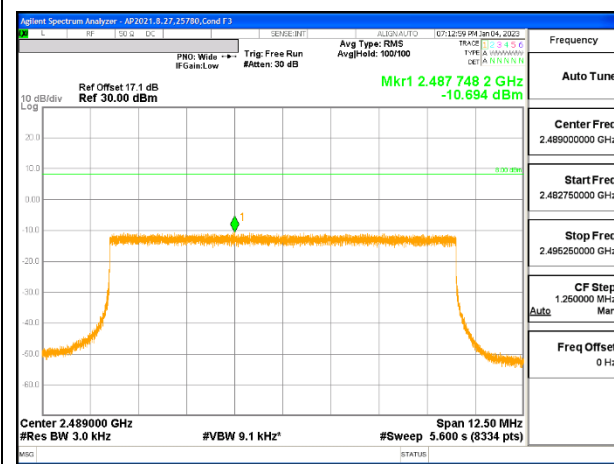

LTE B53 10MHz QPSK Middle Channel RB50-0

Intentionally Blank

9.3.2. 5G NR n53

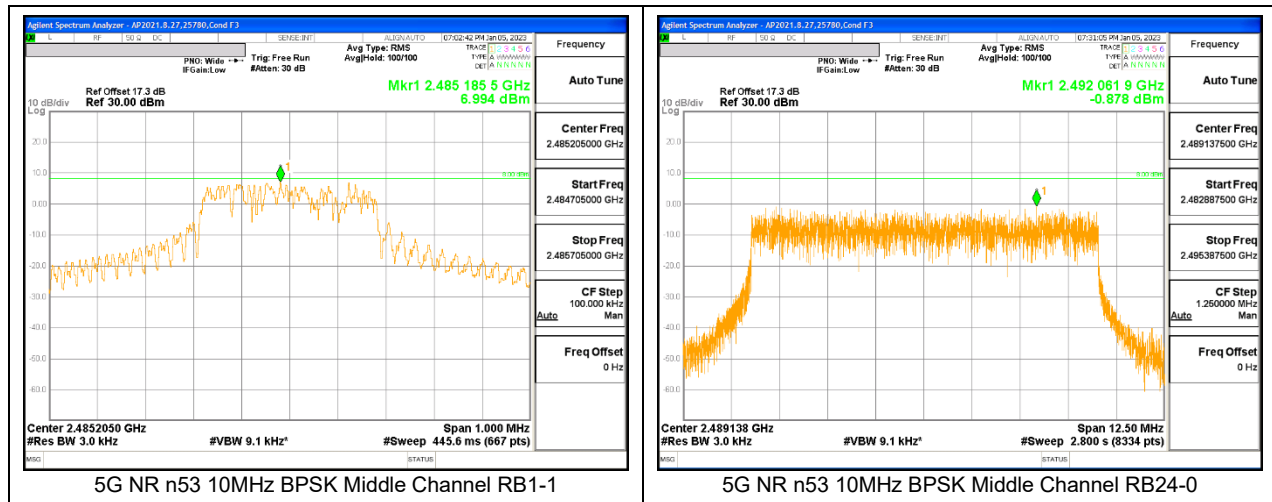

9.4. 6dB BANDWIDTH

RULE PART(S)

FCC: §25.149 (c)(4) (ii)
ISED: SMSE-009-20 Annex A 9.c

LIMITS

The 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The 6dB bandwidth was measured with the spectrum analyzer at the low/ middle/high channel in each band where RBW is 1%-5% of EBW, VBW $\geq 3 * RBW$, Peak detector and max hold.

RESULTS


LTE BAND 53

Band	Mode	RB Allocation/RB Offset	f(MHz)	6dB BW (MHz)	6dB BW Limit (MHz)
LTE BAND 53	1.4MHz, QPSK	6/0	2489	1.080	0.5
	1.4MHz, 16QAM			1.082	
	3MHz, QPSK	15/0		2.707	
	3MHz, 16QAM			2.700	
	5MHz, QPSK	25/0		4.498	
	5MHz, 16QAM			4.497	
	10MHz, QPSK	50/0		9.031	
	10MHz, 16QAM			9.055	


5G NR n53

Band	Mode	RB Allocation/RB Offset	f(MHz)	6dB BW (MHz)	6dB BW Limit (MHz)
5G NR n53	10MHz, BPSK	24/0	2489	9.016	0.5
	10MHz, QPSK	24/0		8.996	
	10MHz, 16QAM	24/0		8.615	


9.4.1. LTE BAND 53

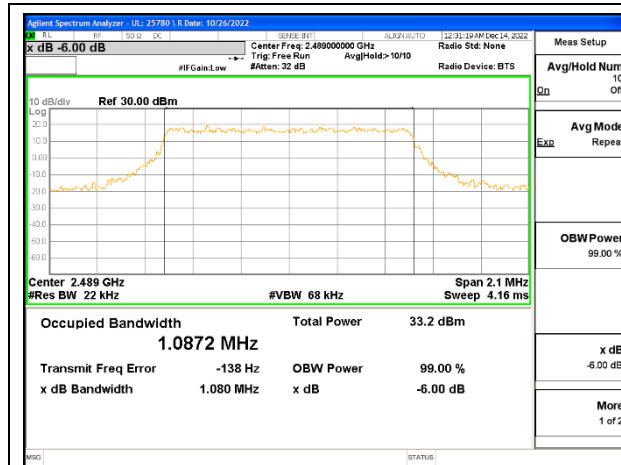


LTE B53 1.4MHz QPSK Middle Channel RB6-0

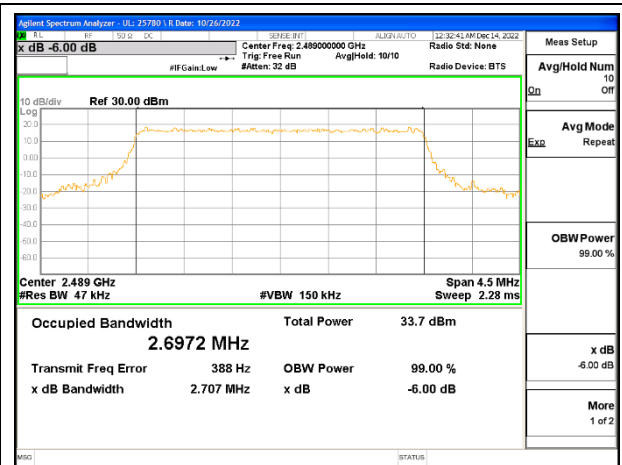

LTE B53 3MHz QPSK Middle Channel RB15-0

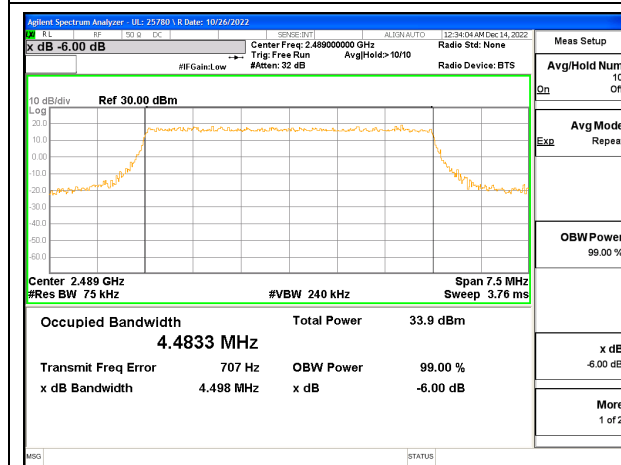


LTE B53 5MHz QPSK Middle Channel RB25-0

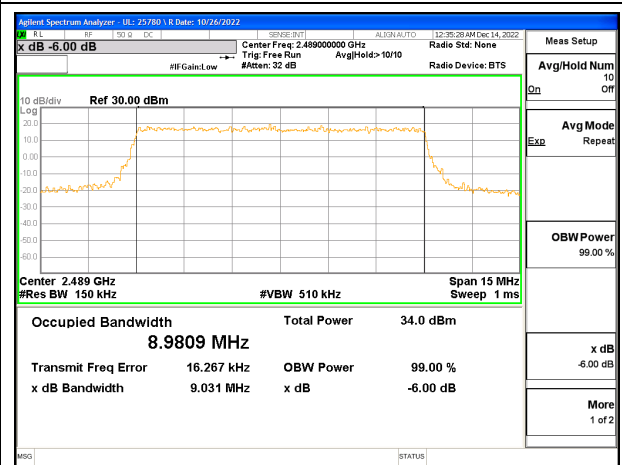

LTE B53 10MHz QPSK Middle Channel RB50-0

9.4.2. 5G NR n53

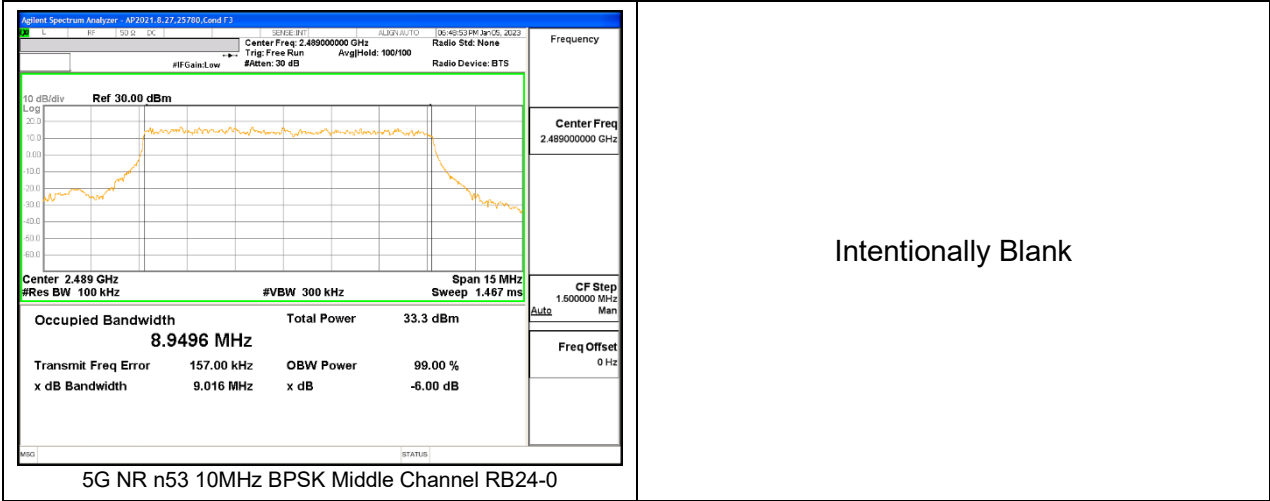

9.5. EMISSIONS MASK AND BANDWIDTH

RULE PART(S)

FCC: §25.149 (c)(4)
ISED: SMSE-009-20 Annex A 9

LIMITS

FCC: §25.149

(c) Equipment certification. (4) Applications for equipment authorization of terrestrial low-power system equipment that will operate in the 2483.5-2495 MHz band shall demonstrate the following:

- (v) Emissions below 2483.5 MHz are attenuated below the transmitter power (P) measured in watts by a factor of at least $40 + 10 \log(P)$ dB at the channel edge at 2483.5 MHz, $43 + 10 \log(P)$ dB at 5 MHz from the channel edge, and $55 + 10 \log(P)$ dB at X MHz from the channel edge where X is the greater of 6 MHz or the actual emission bandwidth.
- (vi) Emissions above 2495 MHz are attenuated below the transmitter power (P) measured in watts by a factor of at least $43 + 10 \log(P)$ dB on all frequencies between the channel edge at 2495 MHz and X MHz from this channel edge and $55 + 10 \log(P)$ dB on all frequencies more than X MHz from this channel edge, where X is the greater of 6 MHz or the actual emission bandwidth;

ISED: SMSE-900-20 Annex A 9:

(g) For the unwanted emission below 2483.5 MHz, the ATC system's transmitter power, P (Watt), shall be attenuated by at least:

- i. $40 + 10 \log(P)$ dB at the channel edge at 2483.5 MHz
 - ii. $43 + 10 \log(P)$ dB at 5 MHz from the channel edge
 - iii. $55 + 10 \log(P)$ dB at X MHz from the channel edge
- where X is the greater of 6 MHz or the actual emission bandwidth.

(h) For the unwanted emission above 2495 MHz, the ATC system's transmitter power, P (Watt), shall be attenuated by at least:

- i. $43 + 10 \log(P)$ dB on all frequencies between the channel edge at 2495 MHz and X MHz from this channel edge
 - ii. $55 + 10 \log(P)$ dB on all frequencies more than X MHz from this channel edge
- where X is the greater of 6 MHz or the actual emission bandwidth.

Notwithstanding the above requirements, the e.i.r.p. density of the ATC system's unwanted emission shall not exceed:

- i. -44.1 dBW/30 kHz measured from the edge of the equipment channel bandwidth.
- ii. -70 dBW/MHz for broadband emissions and -80 dBW/kHz for discrete emissions in the band 1559-1610 MHz

TEST PROCEDURE FOR UNWANTED EMISSIONS

The transmitter output was connected to a CMW500Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each Emission Mask measurement:

1. Set the spectrum analyzer span to include the block edge frequency.
2. Set the Spectrum Emission Mask to cover all frequencies at their respective limits
3. Set the Spectrum Emission Mask to use the required Measurement Bandwidth
4. Set resolution bandwidth to at least 1% of emission bandwidth.

TEST PROCEDURE For EIRP DENSITY LIMIT


The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each Emission Mask measurement:


1. Set the Spectrum analyzer span to include the block edge frequency.
2. Set the Spectrum Emission Mask to cover all frequencies at their respective limits
3. Set the Spectrum Emission Mask to use the Measurement Bandwidth of 30kHz

9.5.1. LTE BAND 53


LTE BAND 53 BANDEGE

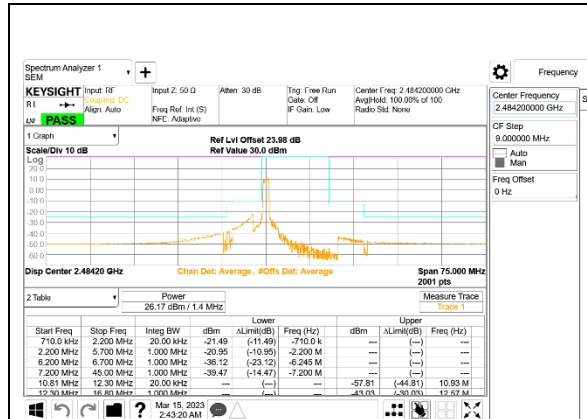


LTE B53 1.4MHz QPSK Low Channel RB6-0 ID: 39004

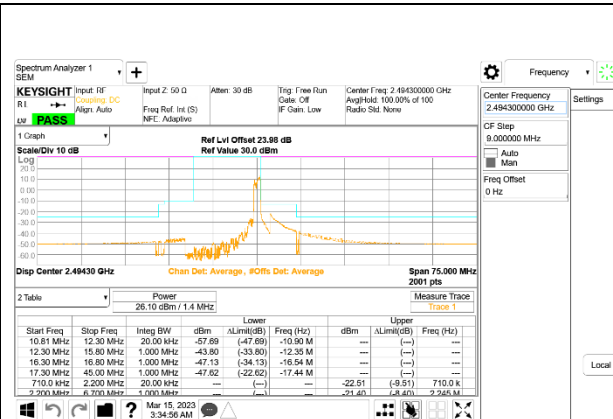


LTE B53 1.4MHz QPSK High Channel RB6-0 ID: 39004

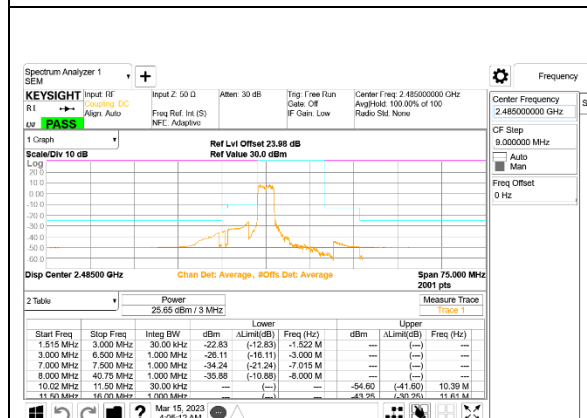


LTE B53 3MHz QPSK Low Channel RB15-0 ID: 39004

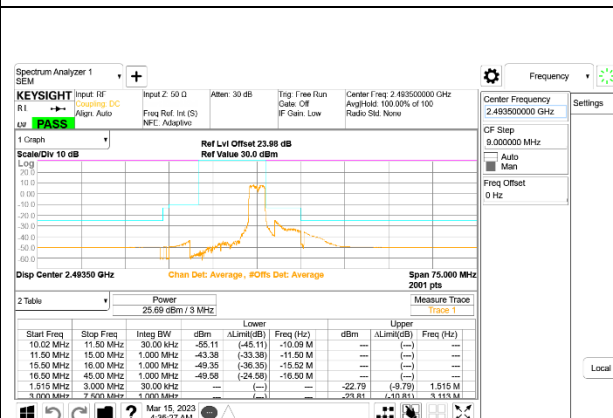


LTE B53 3MHz QPSK High Channel RB15-0 ID: 39004

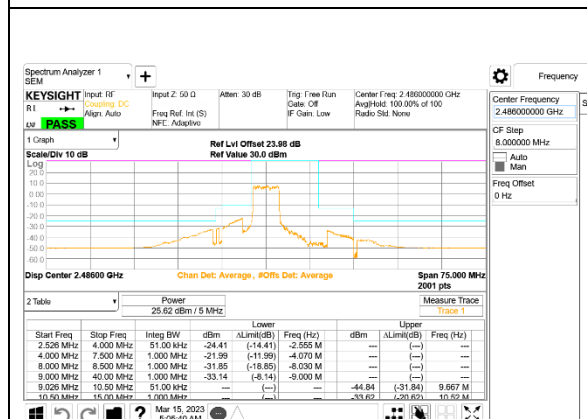

LTE B53 5MHz QPSK Low Channel RB25-0 ID: 39004

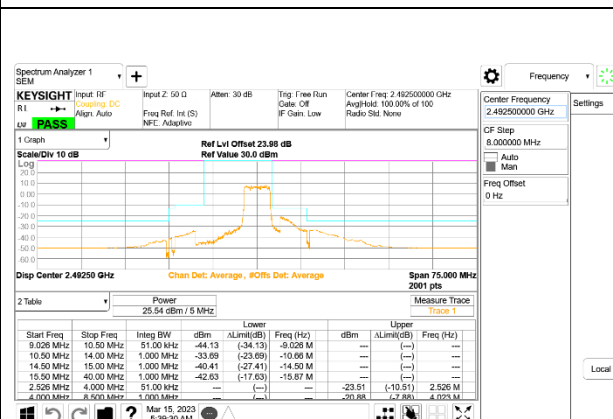


LTE B53 5MHz QPSK High Channel RB25-0 ID: 39004

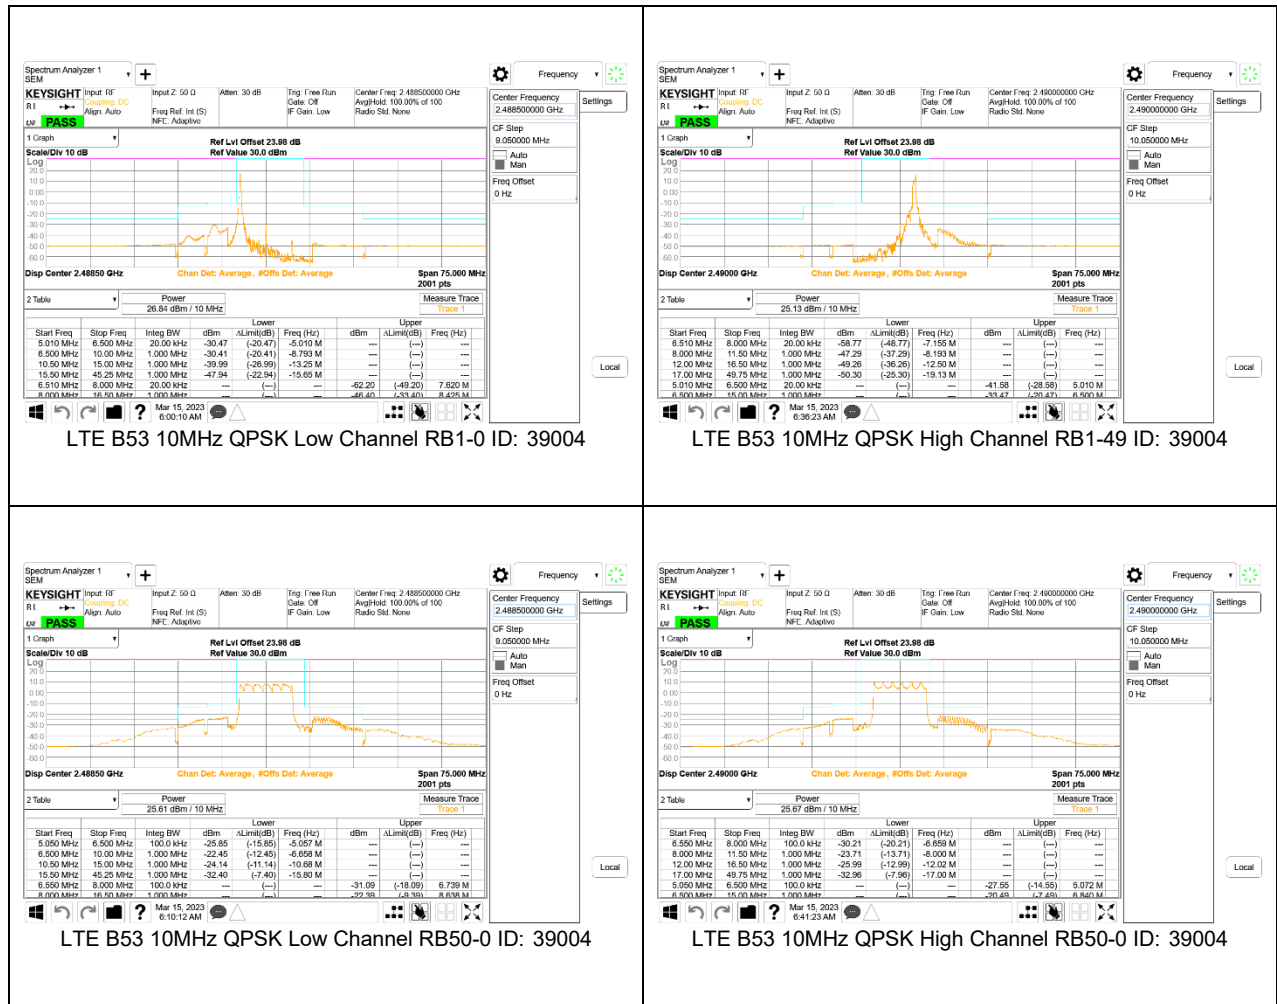


LTE BAND 53 EIRP DENSITY


Band	Mode	RB Allocation/ RB Offset	f (MHz)	Highest Cond Power Density (dBm/30kHz)	Highest Antenna Gain (dBi)	Highest EIRP Density (dBm/30kHz)	EIRP Density Limit (dBm/30kHz)
LTE BAND 53	1.4MHz, QPSK	1/0	2484.2	-14.27	-0.3	-14.57	-14.1
		6/0	2484.2	-19.56		-19.86	
		1/5	2494.3	-14.24		-14.54	
		6/0	2494.3	-20.47		-20.77	
	3MHz, QPSK	1/0	2485.0	-17.84		-18.14	
		15/0	2485.0	-21.99		-22.29	
		1/14	2493.5	-18.52		-18.82	
		15/0	2493.5	-21.95		-22.25	
	5MHz, QPSK	1/0	2486.0	-20.36		-20.66	
		25/0	2486.0	-25.47		-25.77	
		1/24	2492.5	-19.51		-19.81	
		25/0	2492.5	-25.31		-25.61	
	10MHz, QPSK	1/0	2488.5	-28.38		-28.68	
		50/0	2488.5	-31.27		-31.57	
		1/49	2490	-39.25		-39.55	
		50/0	2490	-31.37		-31.67	

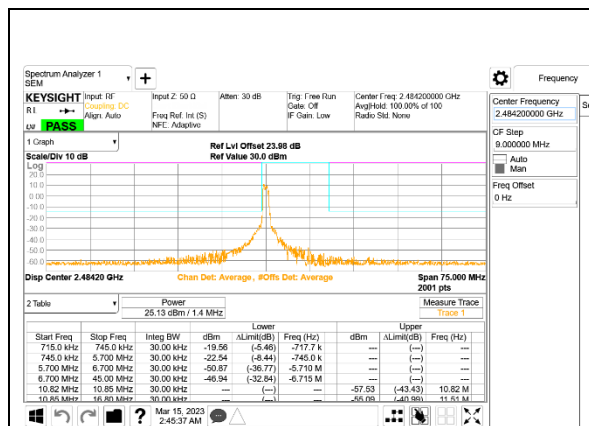


LTE B53 1.4MHz QPSK Low Channel RB6-0 ID: 39004

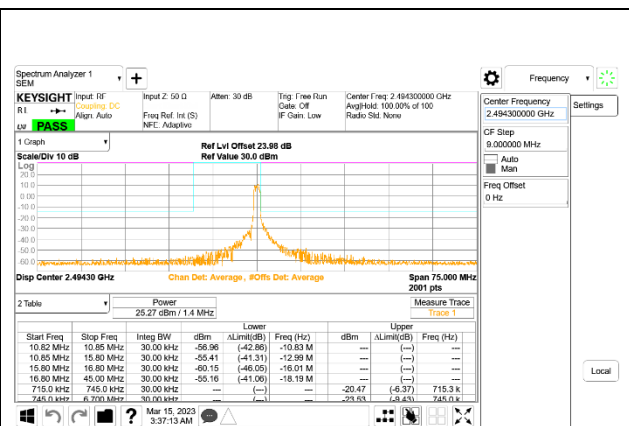

LTE B53 1.4MHz QPSK High Channel RB6-0 ID: 39004

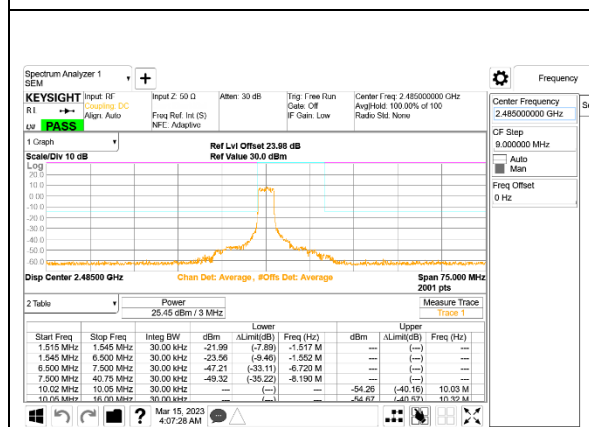

LTE B53 3MHz QPSK Low Channel RB15-0 ID: 39004

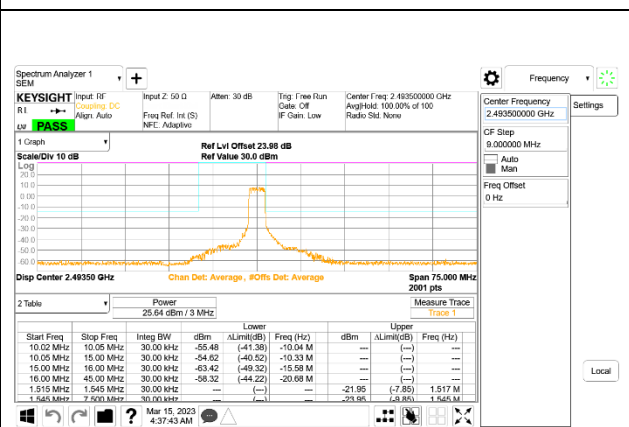


LTE B53 3MHz QPSK High Channel RB15-0 ID: 39004




9.5.2. 5G NR n53

5G NR n53 BANDEDGE

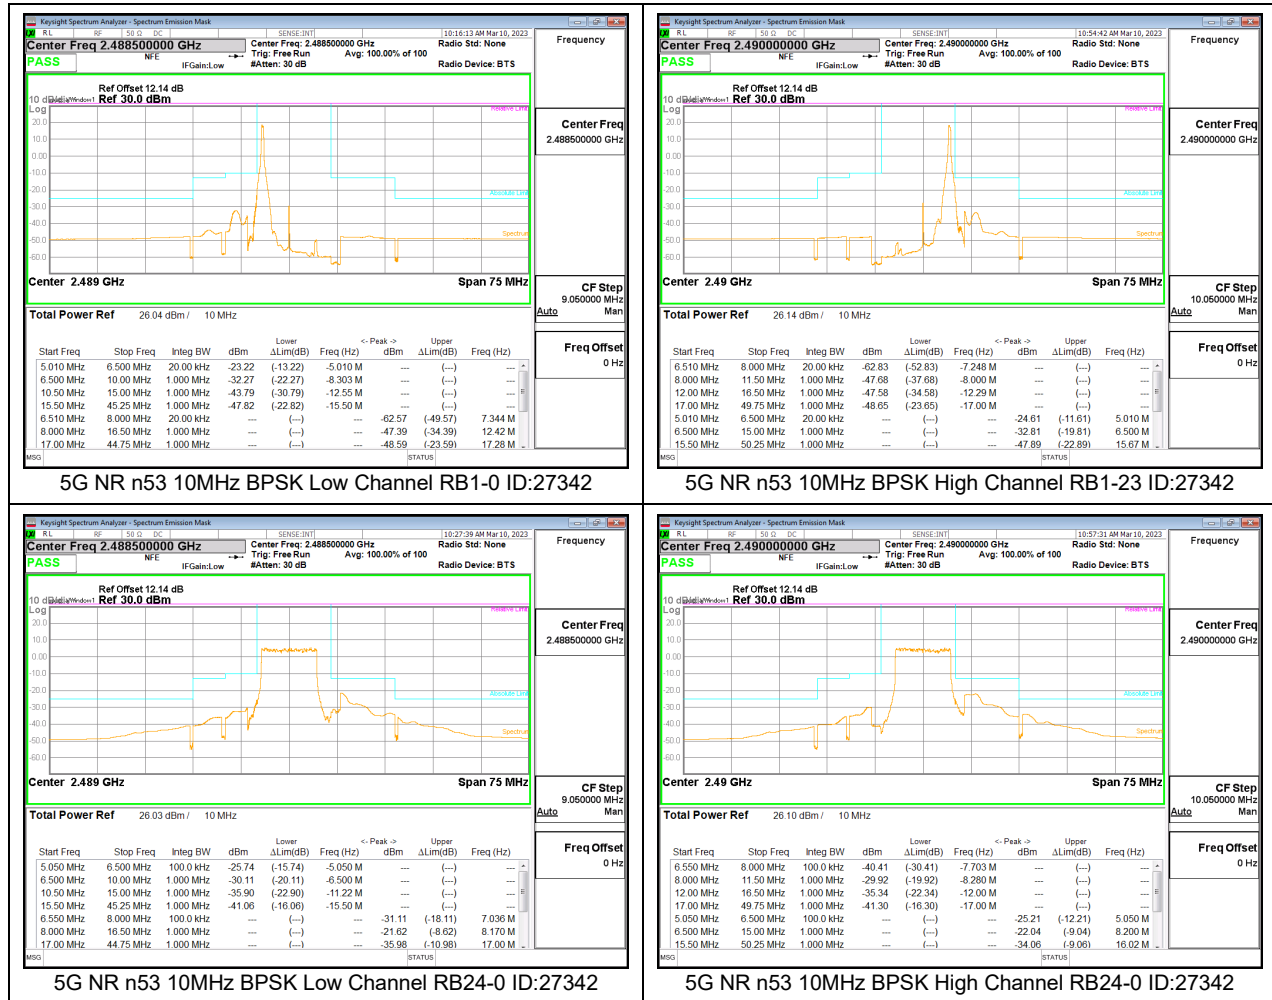


5G NR n53 EIRP DENSITY


Band	Mode	RB Allocation/ RB Offset	f (MHz)	Highest Cond Power Density (dBm/30kHz)	Highest Antenna Gain (dBi)	Highest EIRP Density (dBm/30kHz)	EIRP Density Limit (dBm/30kHz)
5G NR n53	10MHz, BPSK	1/0	2488.5	-20.92	0.6	-21.22	-14.1
		24/0	2488.5	-34.10		-34.40	
		1/23	2490	-23.20		-23.50	
		24/0	2490	-31.83		-32.13	

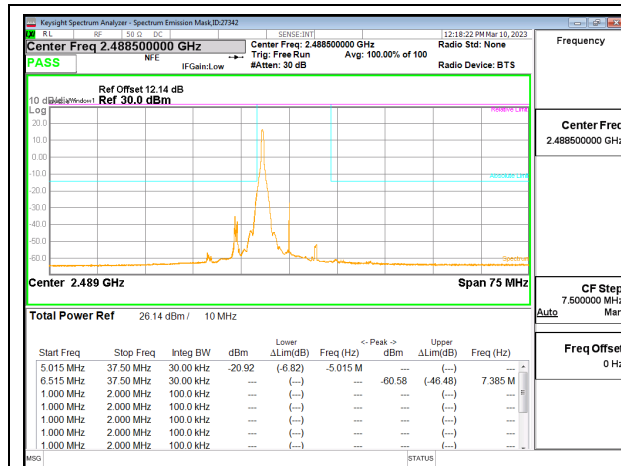


5G NR n53 10MHz BPSK Low Channel RB1-0 ID:27342

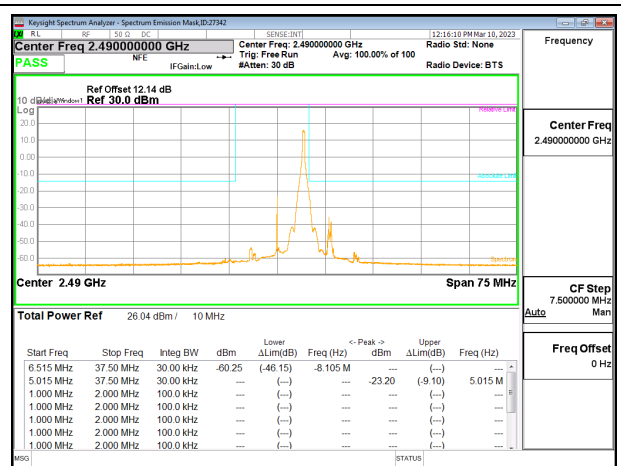

5G NR n53 10MHz BPSK High Channel RB1-23 ID:27342

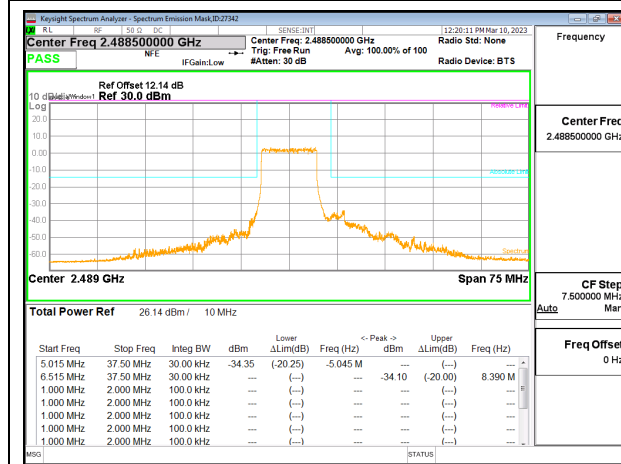

5G NR n53 10MHz BPSK Low Channel RB24-0 ID:27342

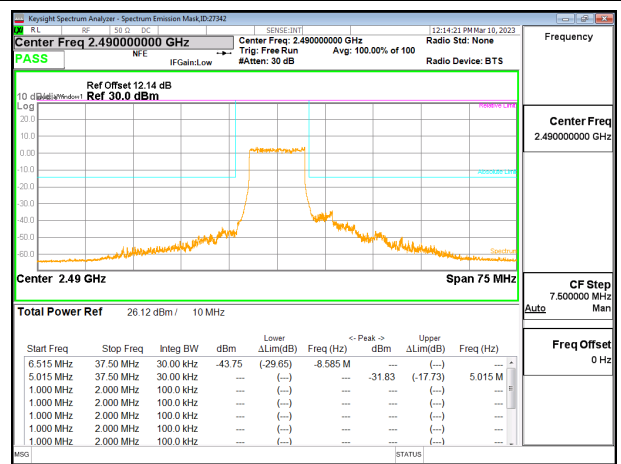

5G NR n53 10MHz BPSK High Channel RB24-0 ID:27342

9.6. OUT OF BAND EMISSIONS

LIMITS

FCC: §25.149 (c)(4)

The minimum permissible attenuation level of any spurious emissions is $55 + 10 \log (P)$ dB where transmitting power (P) in Watts.

ISED: SMSE-009-20 Annex A 9.g

The minimum permissible attenuation level of any spurious emissions is $55 + 10 \log (P)$ dB where transmitting power (P) in Watts.

Notwithstanding the above requirements, the e.i.r.p. density of the ATC system's unwanted emission shall not exceed:

- iii. -44.1 dBW/30 kHz measured from the edge of the equipment channel bandwidth.
- iv. -70 dBW/MHz for broadband emissions and -80 dBW/kHz for discrete emissions in the band 1559-1610 MHz

Note: Radiated data in section 10 confirms a compliance for the emissions in GPS 1559-1610 MHz band were both wideband and discrete emissions therefore the -50dBm/MHz limit was used.

TEST PROCEDURE


The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.







For each out of band emissions measurement:

- Set display line at -25dBm according to the band Limit.
- Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.
(NOTE: Worst case set RBW/VBW to 1MHz/3MHz)


RESULTS

9.6.1. LTE BAND 53

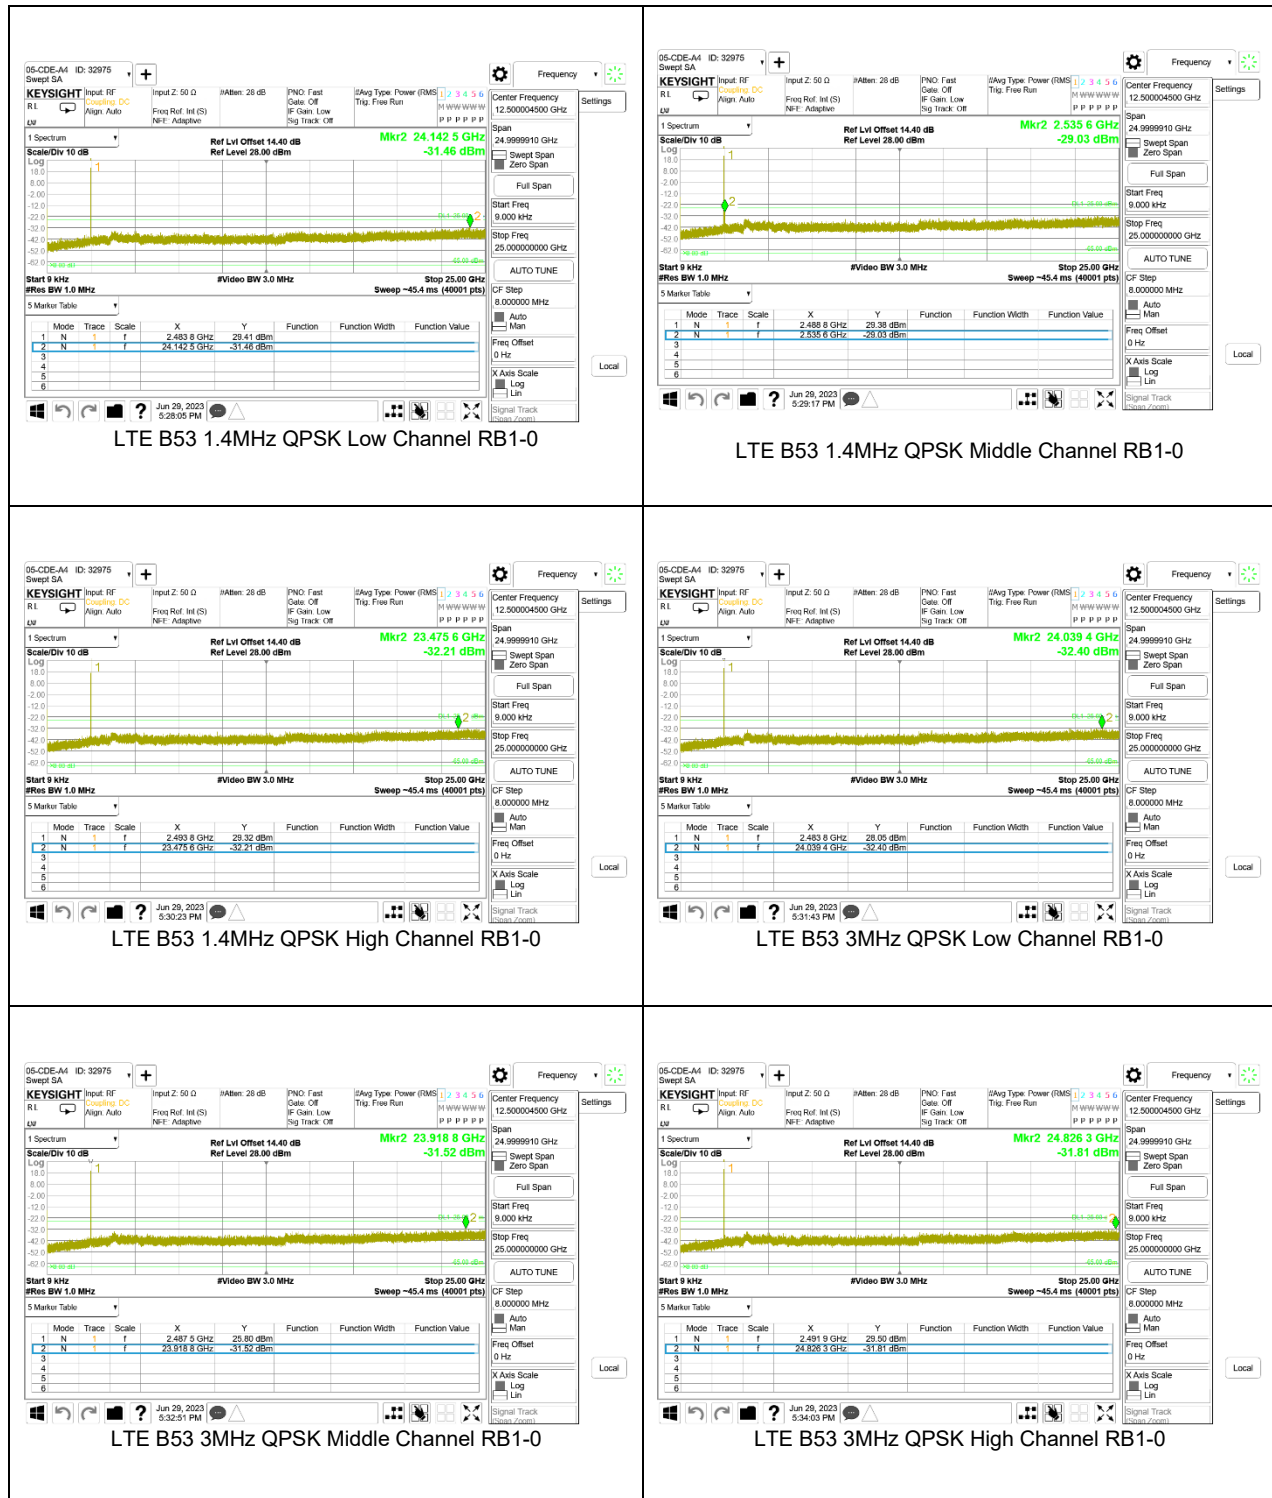

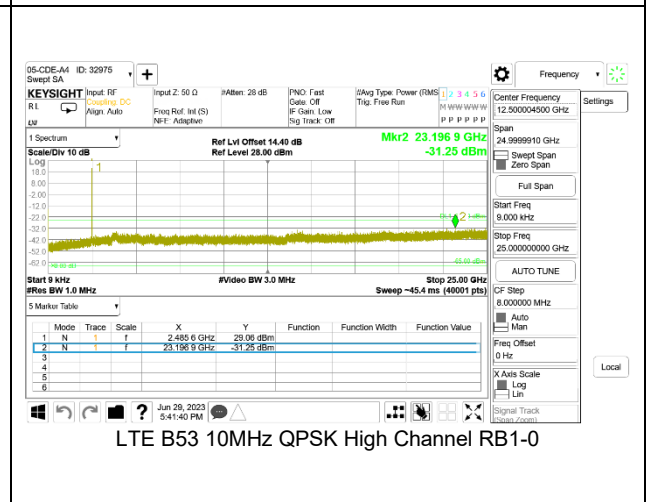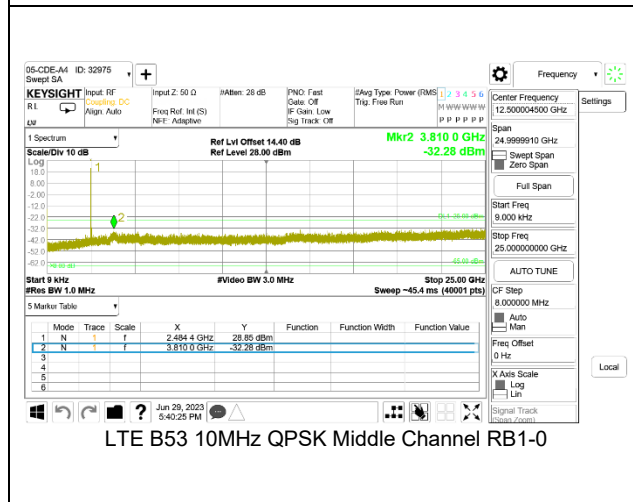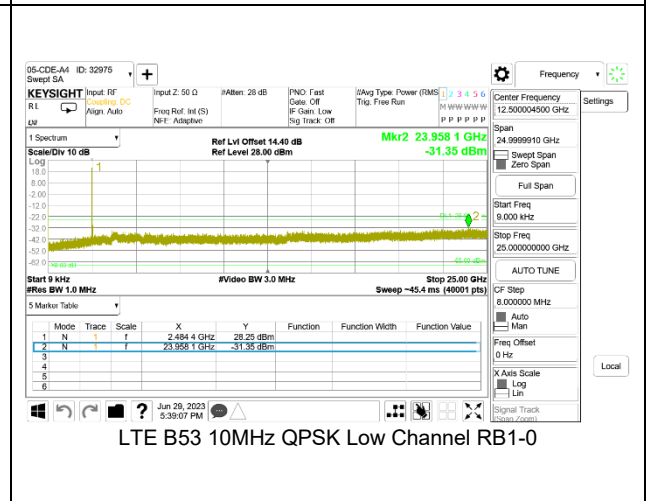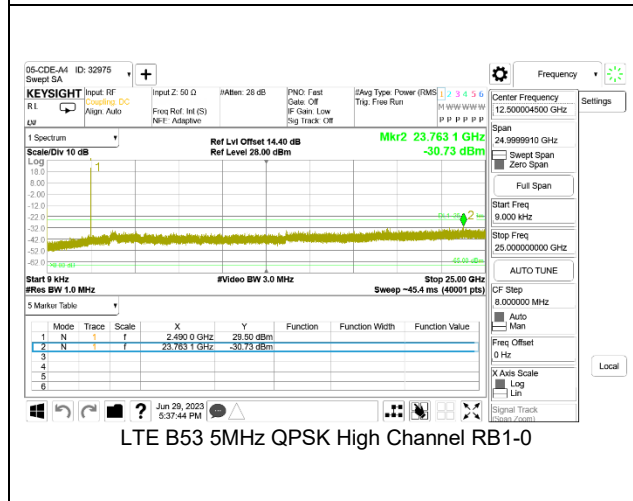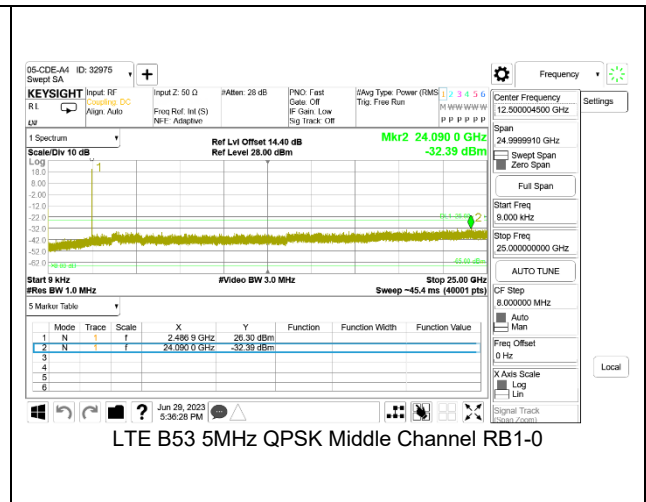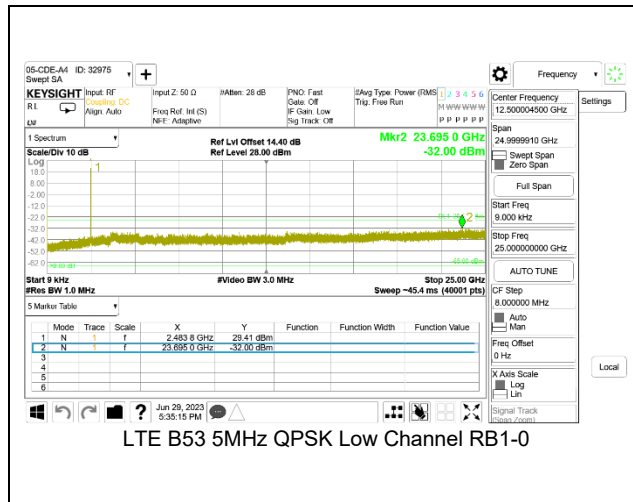

9.6.2. 5G NR 53

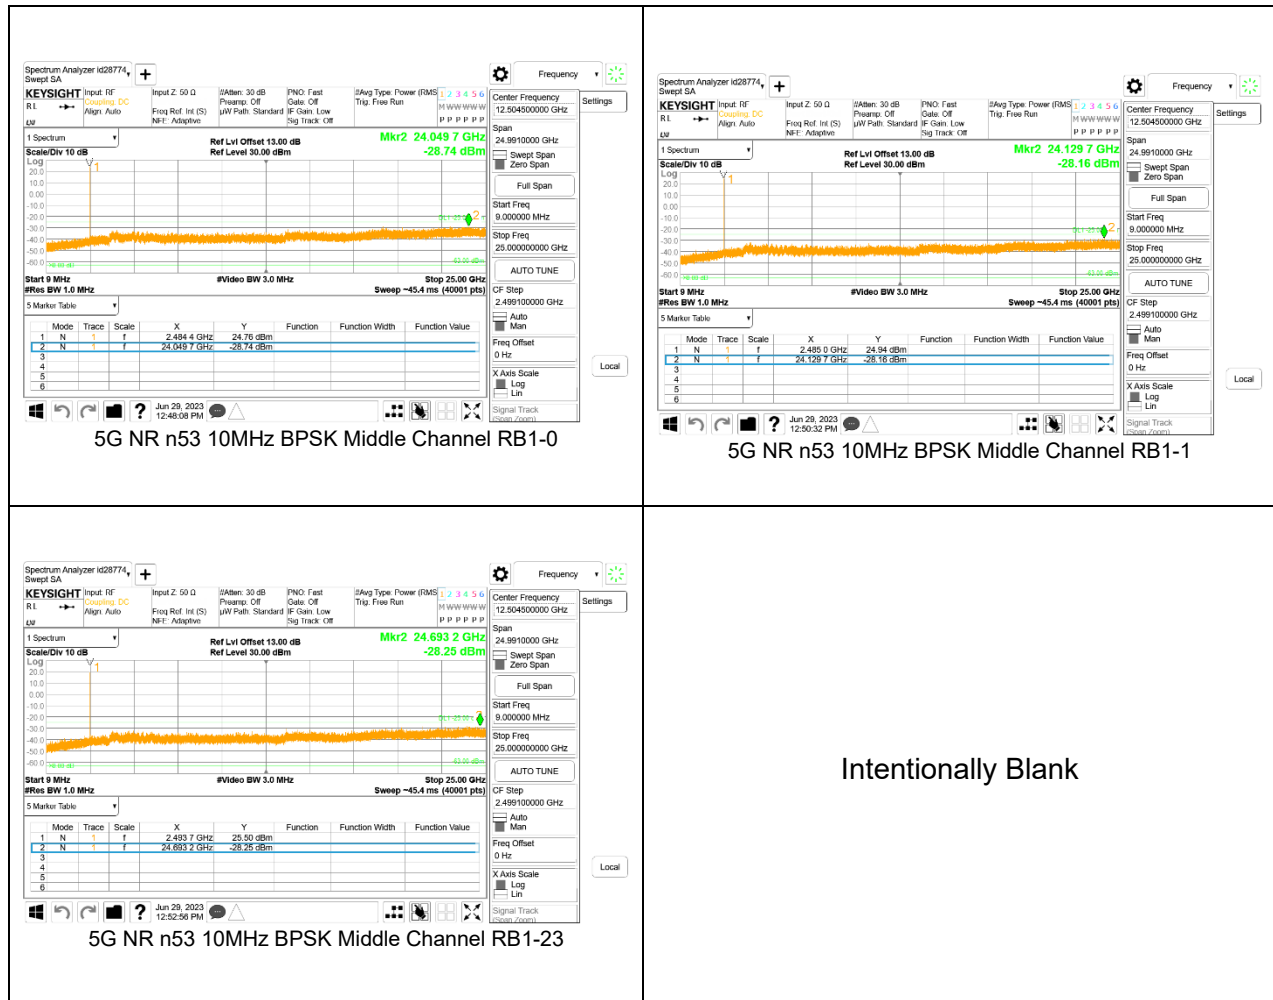

9.7. FREQUENCY STABILITY

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

- Temp. = -30°C to +50°C
- Voltage = (85% - 115%)
Low voltage, 3.23VDC, Normal, 3.8VDC and High voltage, 4.37VDC.
End Voltage, 2.95VDC.

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to 20°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until +50°C is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

LIMITS

FCC: §25.202 (d)

(d) Frequency tolerance, Earth stations. The carrier frequency of each earth station transmitter authorized in these services shall be maintained within 0.001 percent of the reference frequency.

ISED: RSS-170 5.3

For all other ATC equipment, the carrier frequency shall not drift from the reference frequency in excess of ±2.5 ppm for mobile equipment and ±1.5 ppm for base station equipment.

RESULTS

9.7.1. LTE BAND 53

LTE BAND 53 QPSK (10MHz BANDWIDTH)

Test Engineer ID:	28774	Test Date:	1/17/2023
-------------------	-------	------------	-----------

Band	53	Frequency Range		Frequency Error Reading (Hz)	Limit	
Condition		2483.5	2495		10	
		Freq Reading @ Low End (MHz)	Freq Reading @ High End (MHz)		Frequency Stability (ppm)	Within Authorized Frequency Block (Hz)
Temperature	Voltage					
Normal (20°C)	Normal	2484.0006	2494.4769			
Extreme (50°C)		2484.0006	2494.4769	-9.1	-0.004	Yes
Extreme (40°C)		2484.0006	2494.4769	-10.0	-0.004	Yes
Extreme (30°C)		2484.0006	2494.4769	-8.8	-0.004	Yes
Extreme (10°C)		2484.0006	2494.4769	-11.3	-0.005	Yes
Extreme (0°C)		2484.0006	2494.4769	-12.1	-0.005	Yes
Extreme (-10°C)		2484.0006	2494.4769	-11.1	-0.004	Yes
Extreme (-20°C)		2484.0006	2494.4769	-11.1	-0.004	Yes
Extreme (-30°C)		2484.0006	2494.4769	-7.4	-0.003	Yes
20°C	15%	2484.0006	2494.4769	-10.1	-0.004	Yes
	-15%	2484.0006	2494.4769	-11.4	-0.005	Yes
	End Point Voltage	2484.0006	2494.4769	-10.6	-0.004	Yes

9.7.2. 5G NR n53

5G NR n53 BPSK (10MHz BANDWIDTH)

Test Engineer ID:	28774	Test Date:	1/17/2023
-------------------	-------	------------	-----------

Band	53	Frequency Range		Frequency Error Reading (Hz)	Limit	
Condition		2483.5	2495		10	
		Freq Reading @ Low End (MHz)	Freq Reading @ High End (MHz)		Frequency Stability (ppm)	Within Authorized Frequency Block (Hz)
Temperature	Voltage					
Normal (20°C)	Normal	2484.5075	2494.8425			
Extreme (50°C)		2484.5075	2494.8425	-9.5	-0.004	Yes
Extreme (40°C)		2484.5075	2494.8425	-9.5	-0.004	Yes
Extreme (30°C)		2484.5075	2494.8425	-7.9	-0.003	Yes
Extreme (10°C)		2484.5075	2494.8425	-9.0	-0.004	Yes
Extreme (0°C)		2484.5075	2494.8425	-9.8	-0.004	Yes
Extreme (-10°C)		2484.5075	2494.8425	-8.5	-0.003	Yes
Extreme (-20°C)		2484.5075	2494.8425	7.4	0.003	Yes
Extreme (-30°C)		2484.5075	2494.8425	-9.0	-0.004	Yes
20°C	15%	2484.5075	2494.8425	-7.4	-0.003	Yes
	-15%	2484.5075	2494.8425	-8.5	-0.003	Yes
	End Point Voltage	2484.5075	2494.8425	-7.2	-0.003	Yes

10. RADIATED TEST RESULTS

Radiated measurement using the Field Strength Method

Using the test configuration shown in Figure 6 below, we measure the radiated emissions directly from the EUT and convert the measured field strength or received power to ERP or EIRP, as required, for comparison to the applicable limits. As stated in 5.5.1 of ANSI C63.26-2015, the field strength measurement method using a test site validated to the requirements of ANSI C63.4 is an alternative to the substitution measurement method.

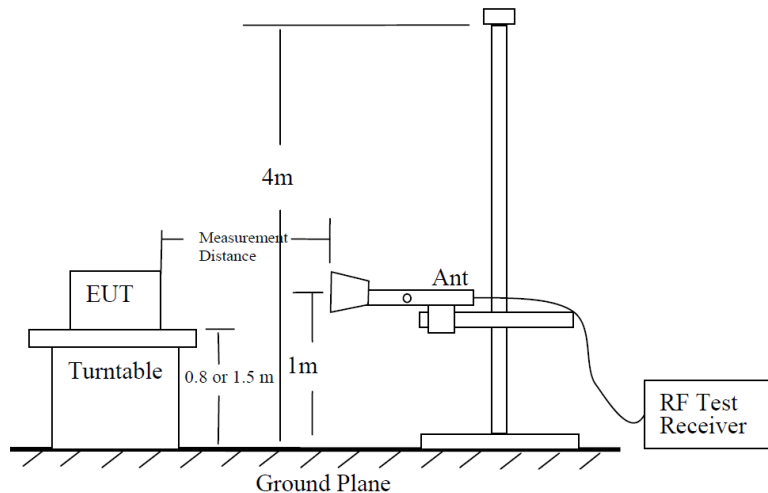


Figure 6—Test site-up for radiated ERP and/or EIRP measurements

Radiated Power Measurement Calculation According to ANSI C63.26-2015

- a) $E \text{ (dB}\mu\text{V/m)} = \text{Measured amplitude level (dB}\mu\text{V)} + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}.$
- b) $E \text{ (dB}\mu\text{V/m)} = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}.$
- c) $E \text{ (dB}\mu\text{V/m)} = \text{EIRP (dBm)} - 20\log(D) + 104.8$; where D is the measurement distance (in the far field region) in m.
- d) $\text{EIRP (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.


So, from d)

The measuring distance is usually at 3m, then $20 \cdot \log(3) = 9.5424$

Then, $\text{EIRP (dBm)} = E \text{ (dB}\mu\text{V/m)} + 9.5424 - 104.8 = E \text{ (dB}\mu\text{V/m)} - 95.2576$

Note: Confidence check of each chamber is performed daily to see if any degradation from expected/normal reading reference data. Ambient check of each chamber is performed monthly.

Example Plot Above 1GHz

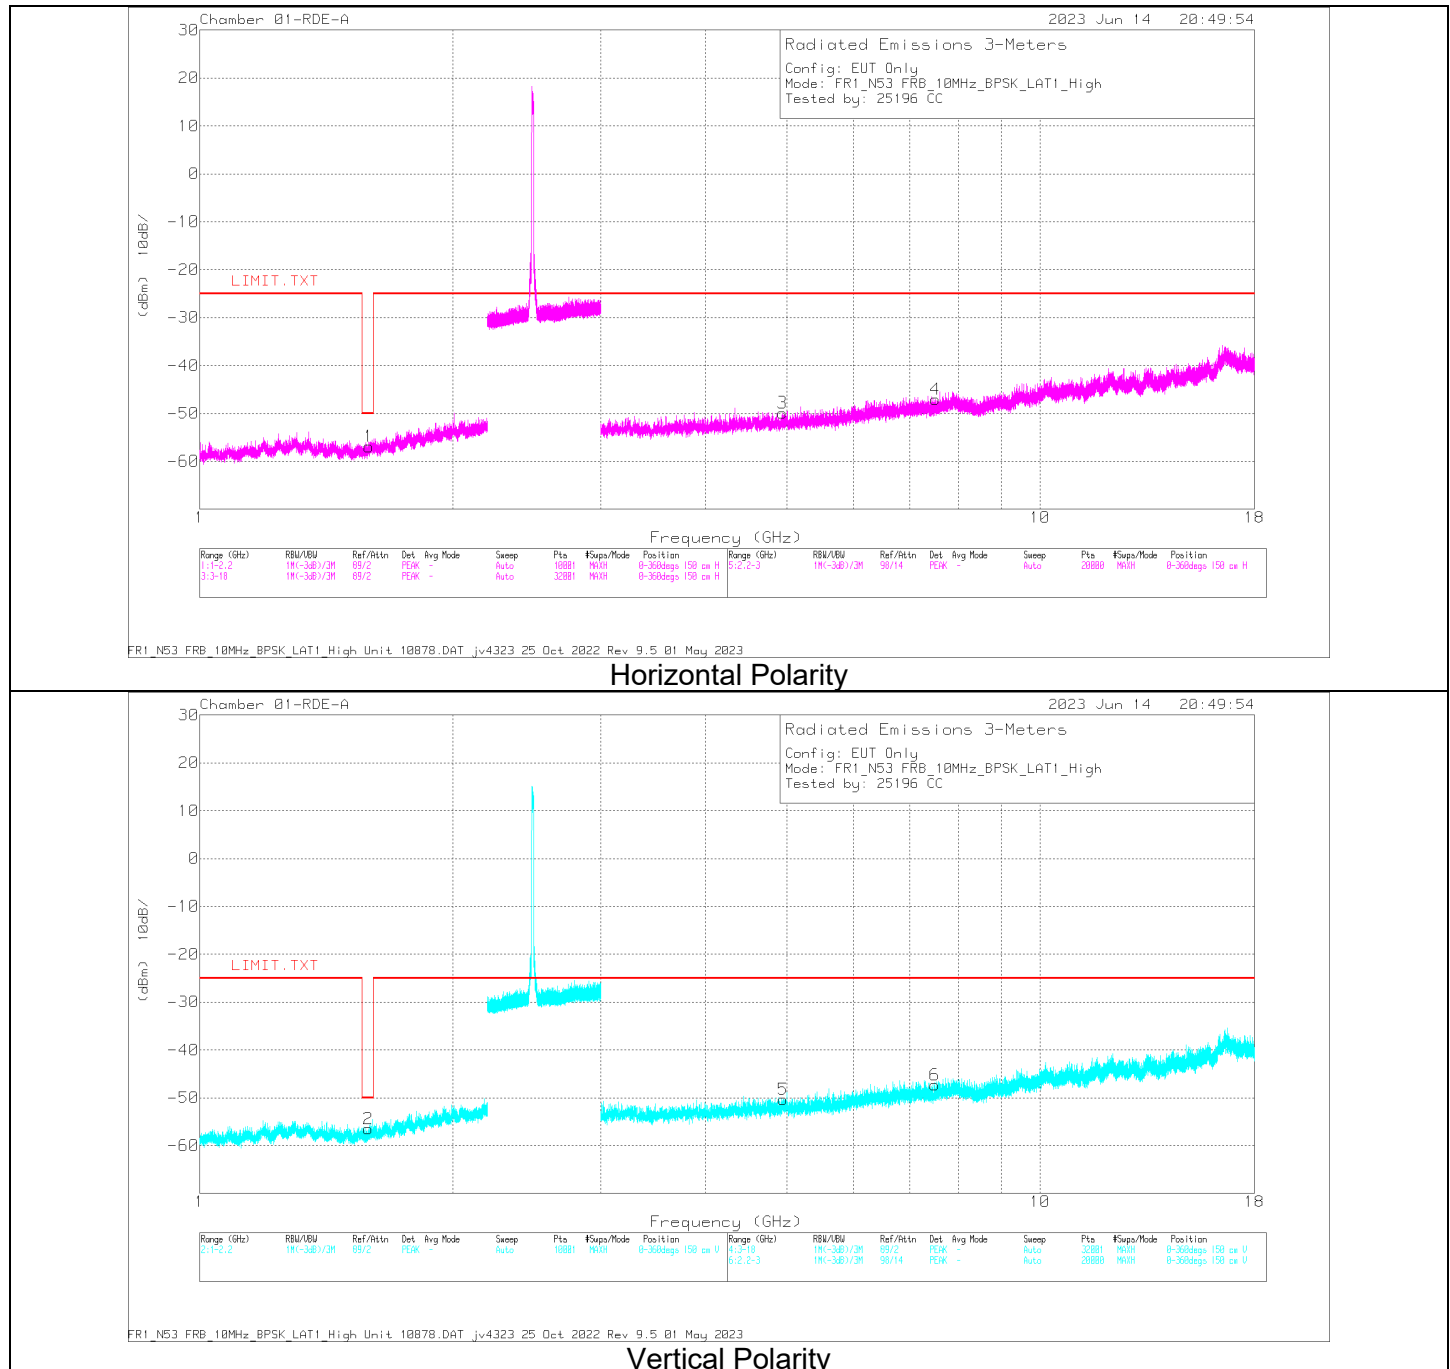

Note: Emission in the 1559 – 1610 MHz GPS band where wideband emissions (-40dBm/MHz), discrete emissions (-50dBm/MHz) and Carrier-off-State Radiation Emissions (-50dBm/MHz) limits meet while the Transmitter ON/OFF.

Trace Markers

Frequency (GHz)	Meter Reading (dBuV)	Det	81886 ACF (dB) 3mH	BRF 2.4-2.5GHz T1786 1-18GHz	EIRP CF	Gain/Loss (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
1.588000	38.88	Pk	28.4	.5	-95.2	-29	-56.42	-50	-6.42	V
1.590880	38.37	Pk	28.4	.6	-95.2	-29.1	-56.93	-50	-6.93	H
4.936875	34.62	Pk	34.1	.4	-95.2	-23.79	-49.87	-25	-24.87	H
4.944844	34.28	Pk	34.1	.4	-95.2	-23.86	-50.28	-25	-25.28	V
7.500938	31.24	Pk	35.7	.4	-95.2	-19.47	-47.33	-25	-22.33	V
7.504688	31.59	Pk	35.7	.4	-95.2	-19.52	-47.03	-25	-22.03	H

TEST PROCEDURE

KDB 971168 D01 v03r01/D02 v02r02

All tests above 1GHz were done with a Resolution Bandwidth of 1MHz, and a Video Bandwidth of 3MHz.

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

FCC: §25.149 (c)(4)

(vii) Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately above and adjacent to the 2495 MHz a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. If 1 percent of the emission bandwidth of the fundamental emission is less than 1 MHz, the power measured must be integrated over the required measurement bandwidth of 1 MHz. A resolution bandwidth narrower than 1 MHz is permitted to improve measurement accuracy, provided the measured power is integrated over the full required measurement bandwidth (*i.e.*, 1 MHz). The emission bandwidth of the fundamental emission of a transmitter is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

ISED: SMSE-009-20 Annex A 9

j. Compliance with this limit may be based on the use of a measurement resolution bandwidth of at least 1% of the occupied bandwidth. If 1% of the occupied bandwidth is less than 1 MHz, the power measured shall be integrated over the required measurement bandwidth of 1 MHz.

RESULTS

10.1. FIELD STRENGTH OF SPURIOUS RADIATION, ANT 1

10.1.1. LTE BAND 53

QPSK LTE BAND 53 (10.0MHZ BANDWIDTH), 1 RB

Project #:	4790592262
Date:	3/3/2023
Test Engineer:	32145
Configuration:	EUT Only
Mode	LTE_B53_10MHz_QPSK_1RB
Chamber #:	01-RDE-A

Frequency (GHz)	Meter Reading (dBuV)	Det	Horn Antenna ACF(dB)	BRF 2.4-2.5GHz T1786 1-18GHz	EIRP CF	Gain/Loss (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 2488.5MHz										
1.586200	39.61	Pk	27.7	0.5	-95.2	-29.04	-56.43	-50	-6.43	H
1.5749200	40.43	Pk	27.8	0.5	-95.2	-29.03	-55.50	-50	-5.50	V
5.624531	34.21	Pk	34.6	0.4	-95.2	-22.37	-48.36	-25	-23.36	H
5.584219	34.79	Pk	34.7	0.4	-95.2	-22.47	-47.78	-25	-22.78	V
7.975313	32.51	Pk	35.6	0.4	-95.2	-18.95	-45.64	-25	-20.64	H
7.987031	32.49	Pk	35.7	0.4	-95.2	-18.96	-45.57	-25	-20.57	V
Mid Channel, 2489MHz										
1.593760	40.56	Pk	27.7	0.6	-95.2	-28.96	-55.3	-50	-5.30	H
1.587760	40.21	Pk	27.7	0.5	-95.2	-29.00	-55.79	-50	-5.79	V
5.507344	36.09	Pk	34.6	0.4	-95.2	-22.54	-46.65	-25	-21.65	H
5.50875	34.19	Pk	34.6	0.4	-95.2	-22.55	-48.56	-25	-23.56	V
7.725938	34.69	Pk	35.6	0.3	-95.2	-18.96	-43.57	-25	-18.57	H
7.694063	33.03	Pk	35.6	0.5	-95.2	-19.04	-45.11	-25	-20.11	V
High Channel, 2490MHz										
1.59664	40.9	Pk	27.8	0.6	-95.2	-29.05	-54.95	-50	-4.95	H
1.56616	40.12	Pk	27.8	0.5	-95.2	-28.9	-55.68	-50	-5.68	V
5.508281	35.46	Pk	34.6	0.4	-95.2	-22.54	-47.28	-25	-22.28	H
5.522813	34.33	Pk	34.7	0.4	-95.2	-22.46	-48.23	-25	-23.23	V
7.839844	32.75	Pk	35.6	0.4	-95.2	-18.91	-45.36	-25	-20.36	H
7.761563	33.08	Pk	35.6	0.4	-95.2	-19.08	-45.20	-25	-20.20	V

* Emissions in the GPS band were wideband and discrete emissions therefore the -50dBm/MHz limit was used.

QPSK LTE BAND 53 (10.0MHZ BANDWIDTH), 50 RB

Project #:	4790592262
Date:	6/14/2023
Test Engineer:	25196
Configuration:	EUT only
Mode	LTE_B53_10MHz_QPSK_50RB
Chamber #:	01-RDE-A

Frequency (GHz)	Meter Reading (dBuV)	Det	Horn Antenna ACF(dB)	BRF 2.4-2.5GHz T1786 1-18GHz	EIRP CF	Gain/Loss (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 2488.5MHz										
1.599520	40.07	Pk	28.4	0.6	-95.2	-29.02	-55.15	-50	-5.15	H
1.602160	39.42	Pk	28.4	0.6	-95.2	-28.87	-55.65	-50	-5.65	V
4.967344	32.3	Pk	34.2	0.3	-95.2	-23.9	-52.30	-25	-27.3	H
4.967344	33.56	Pk	34.2	0.3	-95.2	-23.9	-51.04	-25	-26.04	V
7.450313	30.69	Pk	35.6	0.4	-95.2	-19.59	-48.10	-25	-23.10	H
7.450313	28.83	Pk	35.6	0.4	-95.2	-19.59	-49.96	-25	-24.96	V
Mid Channel, 2489MHz										
1.580560	40.56	Pk	28.3	.5	-95.2	-28.99	-54.83	-50	-4.83	H
1.592200	39.83	Pk	28.4	.6	-95.2	-29.05	-55.42	-50	-5.42	V
4.978125	32.44	Pk	34.2	.3	-95.2	-23.83	-52.09	-25	-27.09	H
4.978125	34.12	Pk	34.2	.3	-95.2	-23.83	-50.41	-25	-25.41	V
7.468594	29.51	Pk	35.6	.4	-95.2	-19.41	-49.1	-25	-24.1	H
7.468594	29.11	Pk	35.6	.4	-95.2	-19.41	-49.5	-25	-24.5	V
High Channel, 2490MHz										
1.574200	39.78	Pk	28.2	0.5	-95.2	-28.98	-55.70	-50	-5.70	H
1.595680	40.08	Pk	28.4	0.6	-95.2	-28.98	-55.10	-50	-5.10	V
4.990313	32.97	Pk	34.2	0.4	-95.2	-23.8	-51.43	-25	-26.43	H
4.990781	31.96	Pk	34.2	0.4	-95.2	-23.8	-52.44	-25	-27.44	V
7.485000	30.81	Pk	35.6	0.4	-95.2	-19.47	-47.86	-25	-22.86	H
7.485938	29.04	Pk	35.6	0.4	-95.2	-19.47	-49.63	-25	-24.63	V

* Emissions in the GPS band were wideband and discrete emissions therefore the -50dBm/MHz limit was used.

10.1.2. 5G NR n53

BPSK 5G NR n53 (10.0MHZ BANDWIDTH), 1 RB

Project #:	4790592262
Date:	2/27/2023
Test Engineer:	32145
Configuration:	EUT only
Mode	FR1_n53_10MHz_BPSK_1RB
Chamber #:	01-RDE-B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	BRF 2.4-2.5GHz T1786 1-18GHz	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Low Channel, 2488.5MHz										
1.587520	38.38	Pk	27.7	.5	-95.2	-28.99	-57.61	-50	-7.61	H
1.5918400	37.99	Pk	27.7	.6	-95.2	-29.07	-57.98	-50	-7.98	V
4.938750	34.67	Pk	34.2	.4	-95.2	-23.84	-49.77	-25	-24.77	H
4.942031	34.83	Pk	34.2	.4	-95.2	-23.83	-49.60	-25	-24.60	V
7.477969	32.06	Pk	35.5	.4	-95.2	-19.45	-46.69	-25	-21.69	H
7.519219	32.58	Pk	35.4	.4	-95.2	-19.52	-46.34	-25	-21.34	V
Mid Channel, 2489MHz										
1.584640	37.28	Pk	27.7	.5	-95.2	-29.10	-58.82	-50	-8.82	H
1.592320	37.32	Pk	27.7	.6	-95.2	-29.04	-58.62	-50	-8.62	V
4.962188	34.42	Pk	34.1	.3	-95.2	-23.98	-50.36	-25	-25.36	V
4.984219	33.76	Pk	34.2	.4	-95.2	-23.83	-50.67	-25	-25.67	H
7.472344	31.89	Pk	35.5	.4	-95.2	-19.42	-46.83	-25	-21.83	V
7.479844	31.61	Pk	35.5	.4	-95.2	-19.45	-47.14	-25	-22.14	H
High Channel, 2490MHz										
1.583680	38.35	Pk	27.7	.5	-95.2	-29.11	-57.76	-50	-7.76	V
1.592680	37.55	Pk	27.7	.6	-95.2	-29.03	-58.38	-50	-8.38	H
4.93875	34.79	Pk	34.2	.4	-95.2	-23.84	-49.65	-25	-24.65	V
4.970625	34.97	Pk	34.2	.3	-95.2	-23.88	-49.61	-25	-24.61	H
7.435313	31.57	Pk	35.4	.4	-95.2	-19.70	-47.53	-25	-22.53	V
7.458281	32.47	Pk	35.4	.4	-95.2	-19.45	-46.38	-25	-21.38	H

* Emissions in the GPS band were wideband and discrete emissions therefore the -50dBm/MHz limit was used.

BPSK 5G NR n53 (10.0MHZ BANDWIDTH), 24 RB

Project #:	4790592262
Date:	6/14/2023
Test Engineer:	25196
Configuration:	EUT only
Mode	FR1_n53_10MHz_BPSK_24RB
Chamber #:	01-RDE-A

Frequency (GHz)	Meter Reading (dBuV)	Det	81886 ACF (dB) 3mH	BRF 2.4-2.5GHz T1786 1-18GHz	EIRP CF	Gain/Loss (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 2488.5MHz										
1.589440	37.62	Pk	28.4	.6	-95.2	-29.11	-57.69	-50	-7.69	V
1.590400	39.54	Pk	28.4	.6	-95.2	-29.12	-55.78	-50	-5.78	H
4.967344	33.26	Pk	34.2	.3	-95.2	-23.90	-51.34	-25	-26.34	H
4.967344	31.2	Pk	34.2	.3	-95.2	-23.90	-53.40	-25	-28.40	V
7.450313	28.9	Pk	35.6	.4	-95.2	-19.59	-49.89	-25	-24.89	H
7.450313	30.78	Pk	35.6	.4	-95.2	-19.59	-48.01	-25	-23.01	V
Mid Channel, 2489MHz										
1.589200	38.23	Pk	28.4	.6	-95.2	-29.09	-57.06	-50	-7.06	V
1.598560	38.76	Pk	28.4	.6	-95.2	-29.05	-56.49	-50	-6.49	H
4.978125	33.75	Pk	34.2	.3	-95.2	-23.83	-50.78	-25	-25.78	H
4.978594	32.07	Pk	34.2	.3	-95.2	-23.81	-52.44	-25	-27.44	V
7.468125	28.10	Pk	35.6	.4	-95.2	-19.40	-50.5	-25	-25.50	H
7.468125	29.35	Pk	35.6	.4	-95.2	-19.40	-49.25	-25	-24.25	V
High Channel, 2490MHz										
1.588000	38.88	Pk	28.4	.5	-95.2	-29	-56.42	-50	-6.42	V
1.590880	38.37	Pk	28.4	.6	-95.2	-29.1	-56.93	-50	-6.93	H
4.936875	34.62	Pk	34.1	.4	-95.2	-23.79	-49.87	-25	-24.87	H
4.944844	34.28	Pk	34.1	.4	-95.2	-23.86	-50.28	-25	-25.28	V
7.500938	31.24	Pk	35.7	.4	-95.2	-19.47	-47.33	-25	-22.33	V
7.504688	31.59	Pk	35.7	.4	-95.2	-19.52	-47.03	-25	-22.03	H

* Emissions in the GPS band were wideband and discrete emissions therefore the -50dBm/MHz limit was used.

10.2. FIELD STRENGTH OF SPURIOUS RADIATION, ANT 2

10.2.1. LTE BAND 53

QPSK LTE BAND 53 (10.0MHZ BANDWIDTH), 1 RB

Project #:	4790592262
Date:	6/15/2023
Test Engineer:	25196
Configuration:	EUT only
Mode	LTE_B53_10MHz_QPSK_1RB
Chamber #:	01-RDE-A

Frequency (GHz)	Meter Reading (dBuV)	Det	81886 ACF (dB) 3mH	BRF 2.4-2.5GHz T1786 1-18GHz	EIRP CF	Gain/Loss (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 2488.5MHz										
1.599880	39.74	Pk	28.4	.6	-95.2	-29	-55.46	-50	-5.46	V
1.601560	38.58	Pk	28.4	.6	-95.2	-28.89	-56.51	-50	-6.51	H
4.956094	34.81	Pk	34.2	.3	-95.2	-23.98	-49.87	-25	-24.87	H
4.957031	33.22	Pk	34.2	.3	-95.2	-23.95	-51.43	-25	-26.43	V
7.452205	40.02	Pk	35.6	.4	-95.2	-19.53	-38.71	-25	-13.71	H
7.452233	38.73	Pk	35.6	.4	-95.2	-19.53	-40.00	-25	-15.00	V
Mid Channel, 2489MHz										
1.59376	39.36	Pk	28.4	.6	-95.2	-28.96	-55.80	-50	-5.80	V
1.59796	38.48	Pk	28.4	.6	-95.2	-29.07	-56.79	-50	-6.79	H
4.978125	31.81	Pk	34.2	.3	-95.2	-23.83	-52.72	-25	-27.72	H
4.978594	34.83	Pk	34.2	.3	-95.2	-23.81	-49.68	-25	-24.68	V
7.468125	30.33	Pk	35.6	.4	-95.2	-19.40	-48.27	-25	-23.27	V
7.468594	29.25	Pk	35.6	.4	-95.2	-19.41	-49.36	-25	-24.36	H
High Channel, 2490MHz										
1.564120	39.57	Pk	28.2	.5	-95.2	-28.92	-55.85	-50	-5.85	H
1.594840	39.95	Pk	28.4	.6	-95.2	-28.94	-55.19	-50	-5.19	V
4.990313	33.96	Pk	34.2	.4	-95.2	-23.80	-50.44	-25	-25.44	H
4.991250	33.13	Pk	34.2	.4	-95.2	-23.81	-51.28	-25	-26.28	V
7.485938	28.66	Pk	35.6	.4	-95.2	-19.47	-50.01	-25	-25.01	H
7.485938	30.27	Pk	35.6	.4	-95.2	-19.47	-48.4	-25	-23.40	V

* Emissions in the GPS band were wideband and discrete emissions therefore the -50dBm/MHz limit was used.

QPSK LTE BAND 53 (10.0MHZ BANDWIDTH), 50 RB

Project #:	4790592262
Date:	6/14/2023
Test Engineer:	25196
Configuration:	EUT only
Mode	LTE_B53_10MHz_QPSK_1RB
Chamber #:	01-RDE-A

Frequency (GHz)	Meter Reading (dBuV)	Det	81886 ACF (dB) 3mH	BRF 2.4-2.5GHz T1786 1-18GHz	EIRP CF	Gain/Loss (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 2488.5MHz										
1.598680	40.26	Pk	28.4	.6	-95.2	-29.05	-54.99	-50	-4.99	V
1.598800	40.53	Pk	28.4	.6	-95.2	-29.05	-54.72	-50	-4.72	H
4.967813	32.31	Pk	34.2	.3	-95.2	-23.91	-52.30	-25	-27.30	H
4.967813	31.77	Pk	34.2	.3	-95.2	-23.91	-52.84	-25	-27.84	V
7.450313	29.78	Pk	35.6	.4	-95.2	-19.59	-49.01	-25	-24.01	H
7.450313	28.46	Pk	35.6	.4	-95.2	-19.59	-50.33	-25	-25.33	V
Mid Channel, 2489MHz										
1.599400	40.00	Pk	28.4	.6	-95.2	-29.02	-55.22	-50	-5.22	V
1.602160	39.78	Pk	28.4	.6	-95.2	-28.87	-55.29	-50	-5.29	H
4.978594	32.28	Pk	34.2	.3	-95.2	-23.81	-52.23	-25	-27.23	V
4.979063	32.55	Pk	34.2	.3	-95.2	-23.80	-51.95	-25	-26.95	H
7.468125	29.84	Pk	35.6	.4	-95.2	-19.40	-48.76	-25	-23.76	H
7.469531	28.95	Pk	35.6	.4	-95.2	-19.40	-49.65	-25	-24.65	V
High Channel, 2490MHz										
1.599640	40.93	Pk	28.4	.6	-95.2	-29.01	-54.28	-50	-4.28	H
1.601440	39.49	Pk	28.4	.6	-95.2	-28.90	-55.61	-50	-5.61	V
4.990781	31.92	Pk	34.2	.4	-95.2	-23.80	-52.48	-25	-27.48	V
4.991250	34.03	Pk	34.2	.4	-95.2	-23.81	-50.38	-25	-25.38	H
7.485469	28.87	Pk	35.6	.4	-95.2	-19.47	-49.8	-25	-24.8	H
7.485469	29.36	Pk	35.6	.4	-95.2	-19.47	-49.31	-25	-24.31	V

* Emissions in the GPS band were wideband and discrete emissions therefore the -50dBm/MHz limit was used.

10.2.2. 5G NR n53

BPSK 5G NR n53 (10.0MHZ BANDWIDTH), 1 RB

Project #:	4790592262
Date:	6/15/2023
Test Engineer:	32145
Configuration:	EUT only
Mode	FR1_n53_10MHz_BPSK_1RB
Chamber #:	01-RDE-A

Frequency (GHz)	Meter Reading (dBuV)	Det	81886 ACF (dB) 3mH	BRF 2.4-2.5GHz T1786 1-18GHz	EIRP CF	Gain/Loss (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 2488.5MHz										
1.576120	36.48	Pk	28.3	.5	-95.2	-29.09	-59.01	-50	-9.01	H
1.578880	38.33	Pk	28.3	.5	-95.2	-29.03	-57.10	-50	-7.10	V
4.957500	34.03	Pk	34.2	.3	-95.2	-23.95	-50.62	-25	-25.62	H
4.957500	34.40	Pk	34.2	.3	-95.2	-23.95	-50.25	-25	-25.25	V
7.449844	29.01	Pk	35.6	.4	-95.2	-19.59	-49.78	-25	-24.78	H
7.450313	28.08	Pk	35.6	.4	-95.2	-19.59	-50.71	-25	-25.71	V
Mid Channel, 2489MHz										
1.584280	39.72	Pk	28.3	.5	-95.2	-29.1	-55.78	-50	-5.78	H
1.588600	38.92	Pk	28.4	.5	-95.2	-29.05	-56.43	-50	-6.43	V
4.978125	31.96	Pk	34.2	.3	-95.2	-23.83	-52.57	-25	-27.57	H
4.978594	31.72	Pk	34.2	.3	-95.2	-23.81	-52.79	-25	-27.79	V
7.470000	29.34	Pk	35.6	.4	-95.2	-19.40	-49.26	-25	-24.26	H
7.470938	27.92	Pk	35.6	.4	-95.2	-19.42	-50.70	-25	-25.70	V
High Channel, 2490MHz										
1.570120	39.39	Pk	28.2	.5	-95.2	-29.03	-56.14	-50	-6.14	H
1.570240	37.35	Pk	28.2	.5	-95.2	-29.03	-58.18	-50	-8.18	V
4.990313	32.81	Pk	34.2	.4	-95.2	-23.80	-51.59	-25	-26.59	H
4.990781	33.44	Pk	34.2	.4	-95.2	-23.80	-50.96	-25	-25.96	V
7.485938	30.11	Pk	35.6	.4	-95.2	-19.47	-48.56	-25	-23.56	H
7.485938	29.69	Pk	35.6	.4	-95.2	-19.47	-48.98	-25	-23.98	V

* Emissions in the GPS band were wideband and discrete emissions therefore the -50dBm/MHz limit was used.

BPSK 5G NR n53 (10.0MHZ BANDWIDTH), 24 RB

Project #:	4790592262
Date:	6/14/2023
Test Engineer:	25196
Configuration:	EUT only
Mode	FR1_n53_10MHz_BPSK_24RB
Chamber #:	01-RDE-A

Frequency (GHz)	Meter Reading (dBuV)	Det	81886 ACF (dB) 3mH	BRF 2.4-2.5GHz T1786 1-18GHz	EIRP CF	Gain/Loss (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 2488.5MHz										
1.587040	38.24	Pk	28.3	.5	-95.2	-28.98	-57.14	-50	-7.14	H
1.592440	38.63	Pk	28.4	.6	-95.2	-29.04	-56.61	-50	-6.61	V
4.967344	32.93	Pk	34.2	.3	-95.2	-23.90	-51.67	-25	-26.67	H
4.967344	34.57	Pk	34.2	.3	-95.2	-23.90	-50.03	-25	-25.03	V
7.541250	30.46	Pk	35.7	.4	-95.2	-19.45	-48.09	-25	-23.09	H
7.541719	29.16	Pk	35.7	.4	-95.2	-19.45	-49.39	-25	-24.39	V
Mid Channel, 2489MHz										
1.593040	40.3	Pk	28.4	.6	-95.2	-29.01	-54.91	-50	-4.91	H
1.594240	38.84	Pk	28.4	.6	-95.2	-28.95	-56.31	-50	-6.31	V
4.978594	33.21	Pk	34.2	.3	-95.2	-23.81	-51.30	-25	-26.3	H
4.978594	34.30	Pk	34.2	.3	-95.2	-23.81	-50.21	-25	-25.21	V
7.468125	28.31	Pk	35.6	.4	-95.2	-19.40	-50.29	-25	-25.29	V
7.468594	28.51	Pk	35.6	.4	-95.2	-19.41	-50.10	-25	-25.10	H
High Channel, 2490MHz										
1.592440	38.28	Pk	28.4	.6	-95.2	-29.04	-56.96	-50	-6.96	H
1.597960	37.97	Pk	28.4	.6	-95.2	-29.07	-57.30	-50	-7.30	V
4.989844	32.76	Pk	34.2	.4	-95.2	-23.80	-51.64	-25	-26.64	H
4.989844	34.98	Pk	34.2	.4	-95.2	-23.80	-49.42	-25	-24.42	V
7.485000	29.83	Pk	35.6	.4	-95.2	-19.47	-48.84	-25	-23.84	H
7.485000	29.27	Pk	35.6	.4	-95.2	-19.47	-49.40	-25	-24.4	V

* Emissions in the GPS band were wideband and discrete emissions therefore the -50dBm/MHz limit was used.

11. SETUP PHOTOS

Please refer to 14523744-EP1V1 Setup Photo Report for setup photos

END OF REPORT