



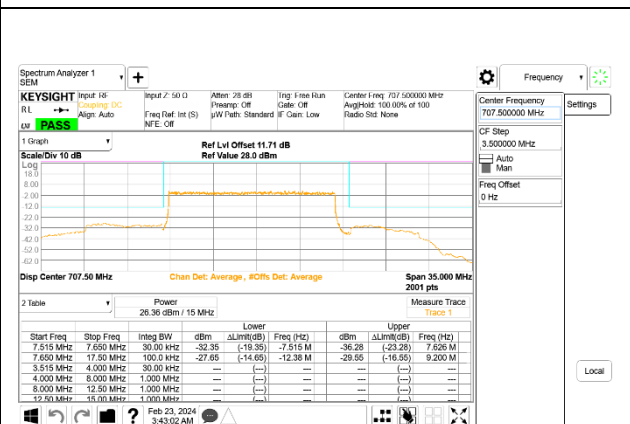
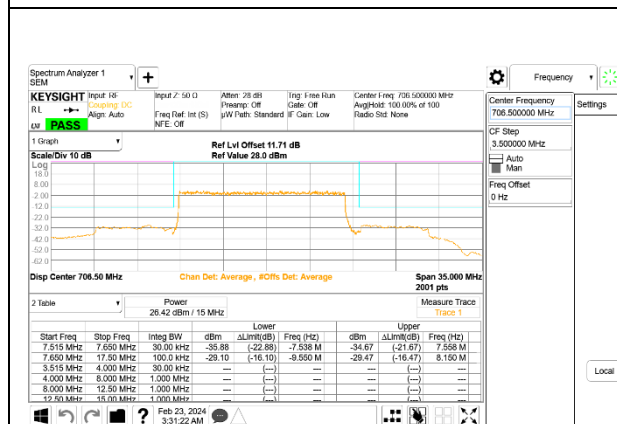
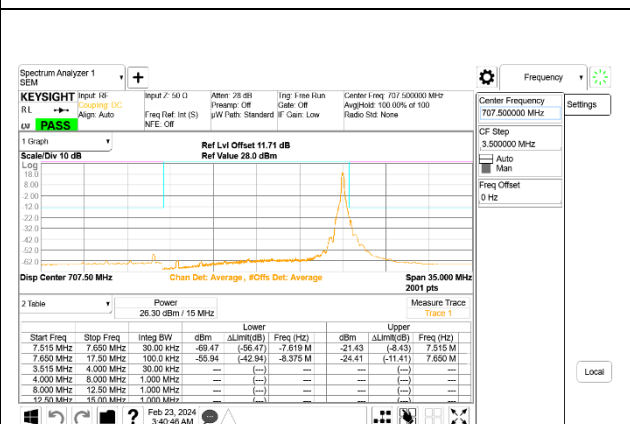


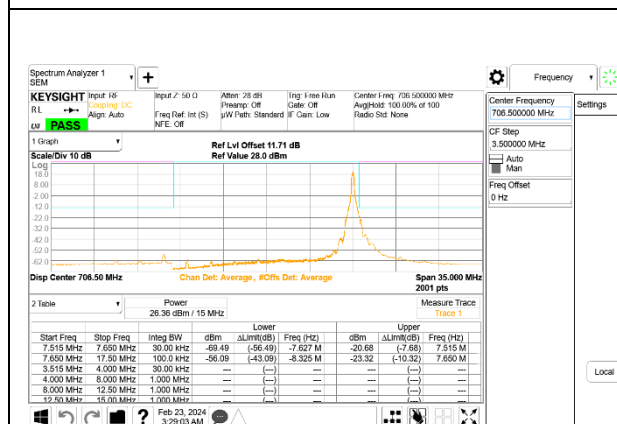

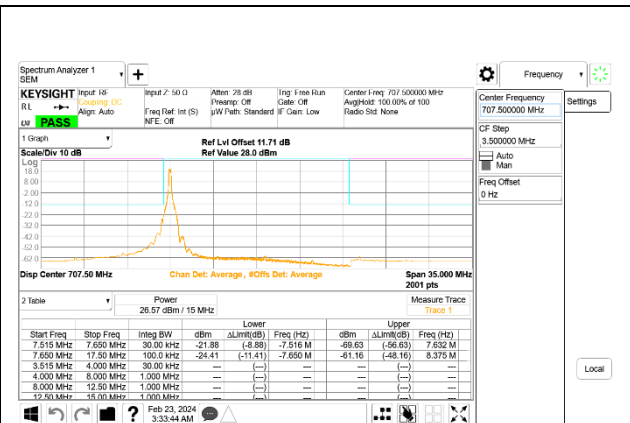

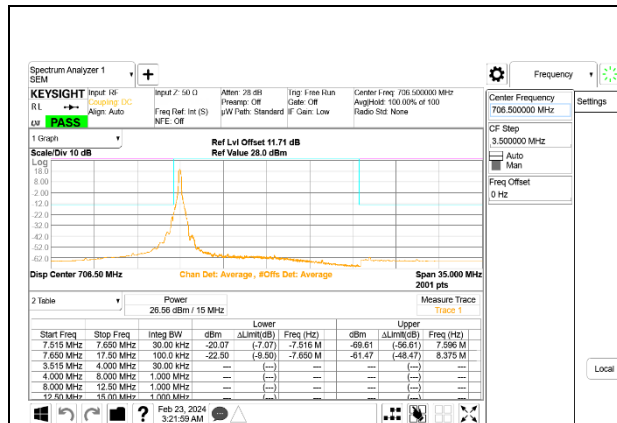

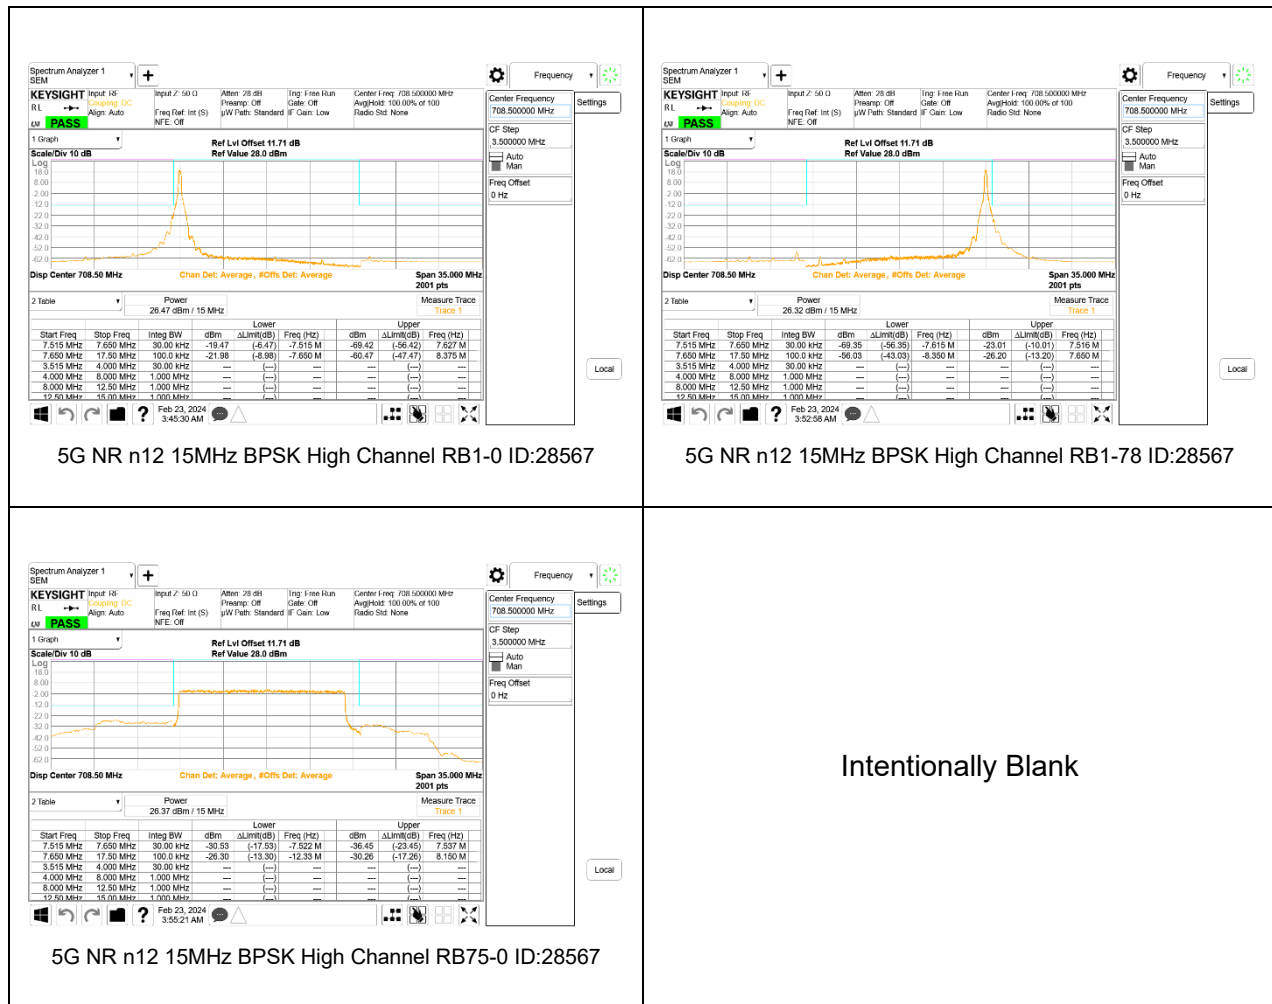

9.2.3. LTE BAND 13 EMISSION MASK

LIMITS

FCC: §27.53

(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:


(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;


(5) Compliance with the provisions of paragraphs (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(f) Emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals. (-70 dBW/MHz = -40 dBm/MHz).

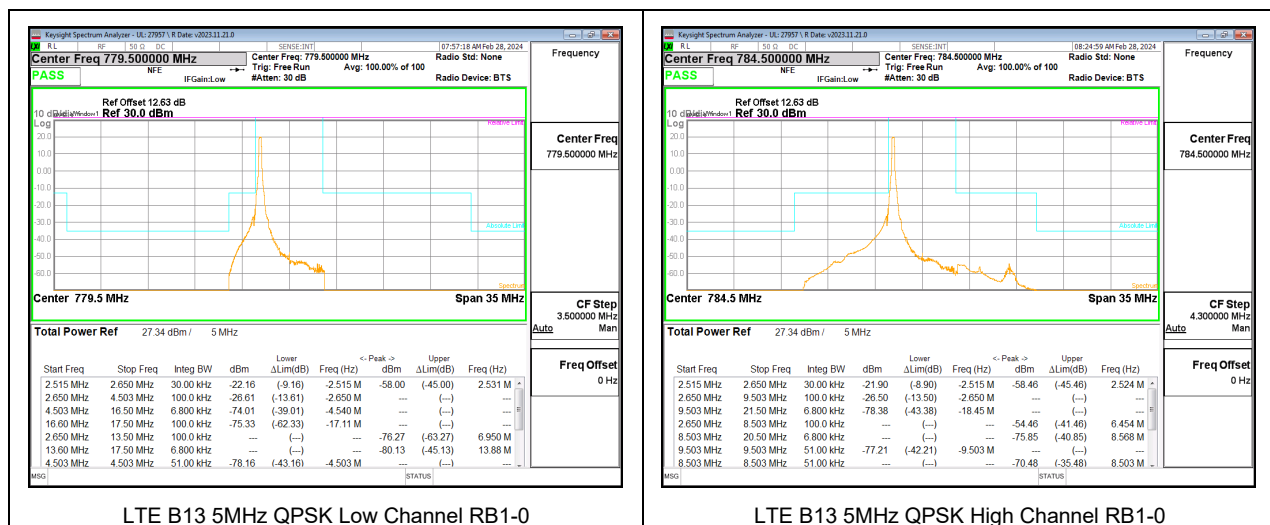



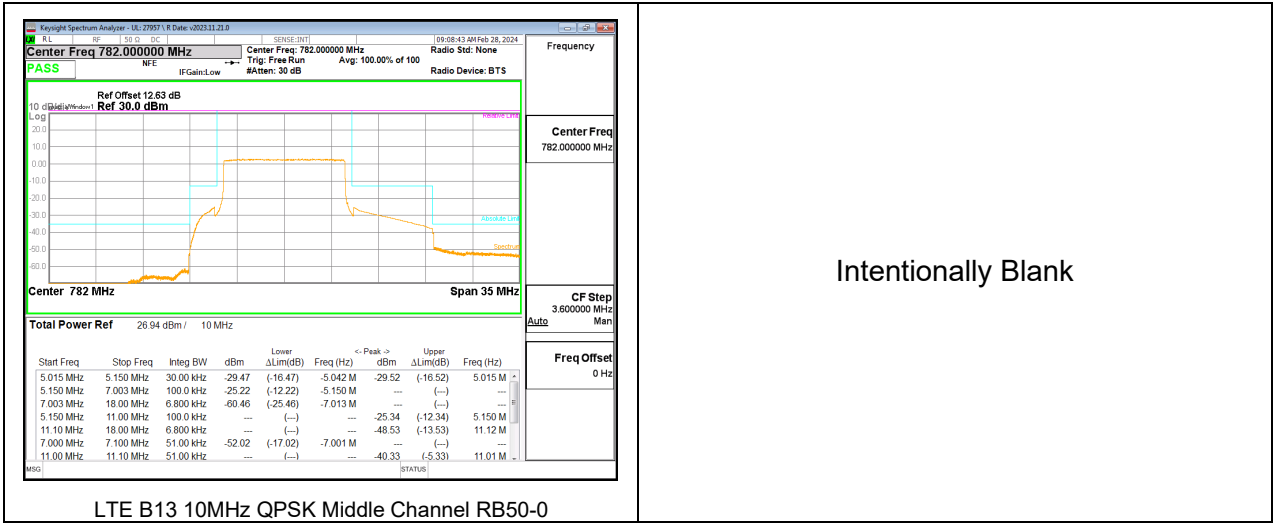

9.2.4. LTE BAND 14 EMISSION MASK

LIMITS

FCC: §90.543 Emission Limitations.

(e) For operations in the 758-768 MHz and the 788-798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.


(3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB.


(4) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(5) Compliance with the provisions of paragraph (e)(3) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of 30 kHz may be employed.

(f) For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.


LTE BAND 14 EMISSION MASK

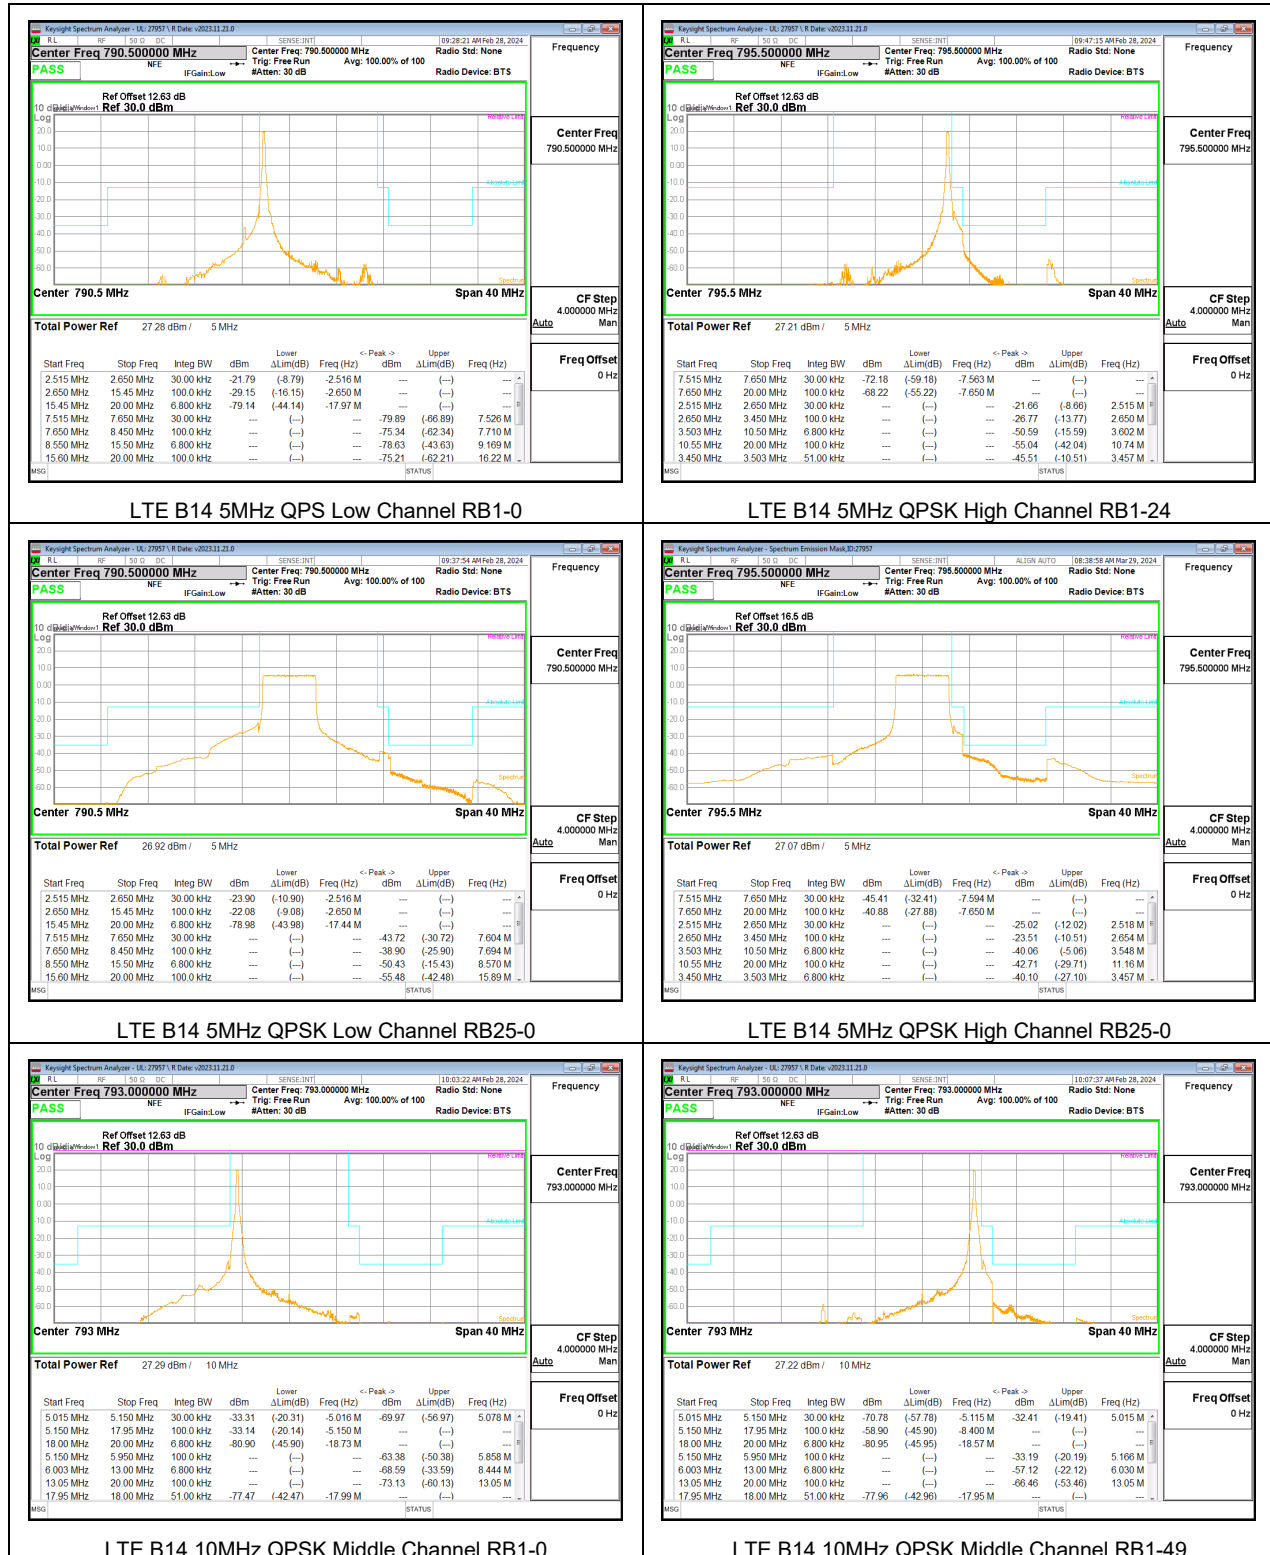


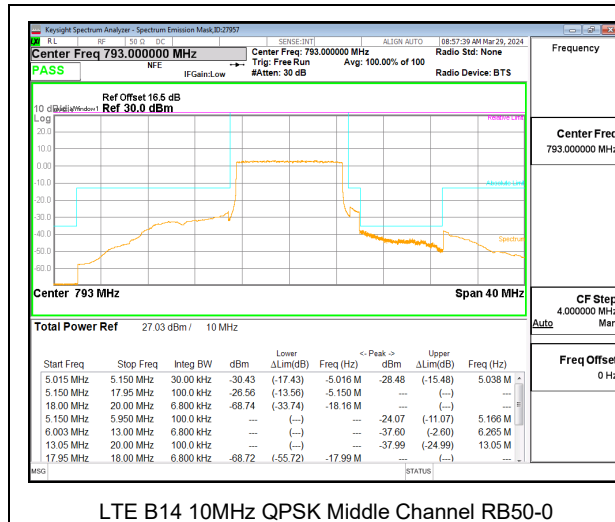

Intentionally Blank

5G NR n14 EMISSION MASK

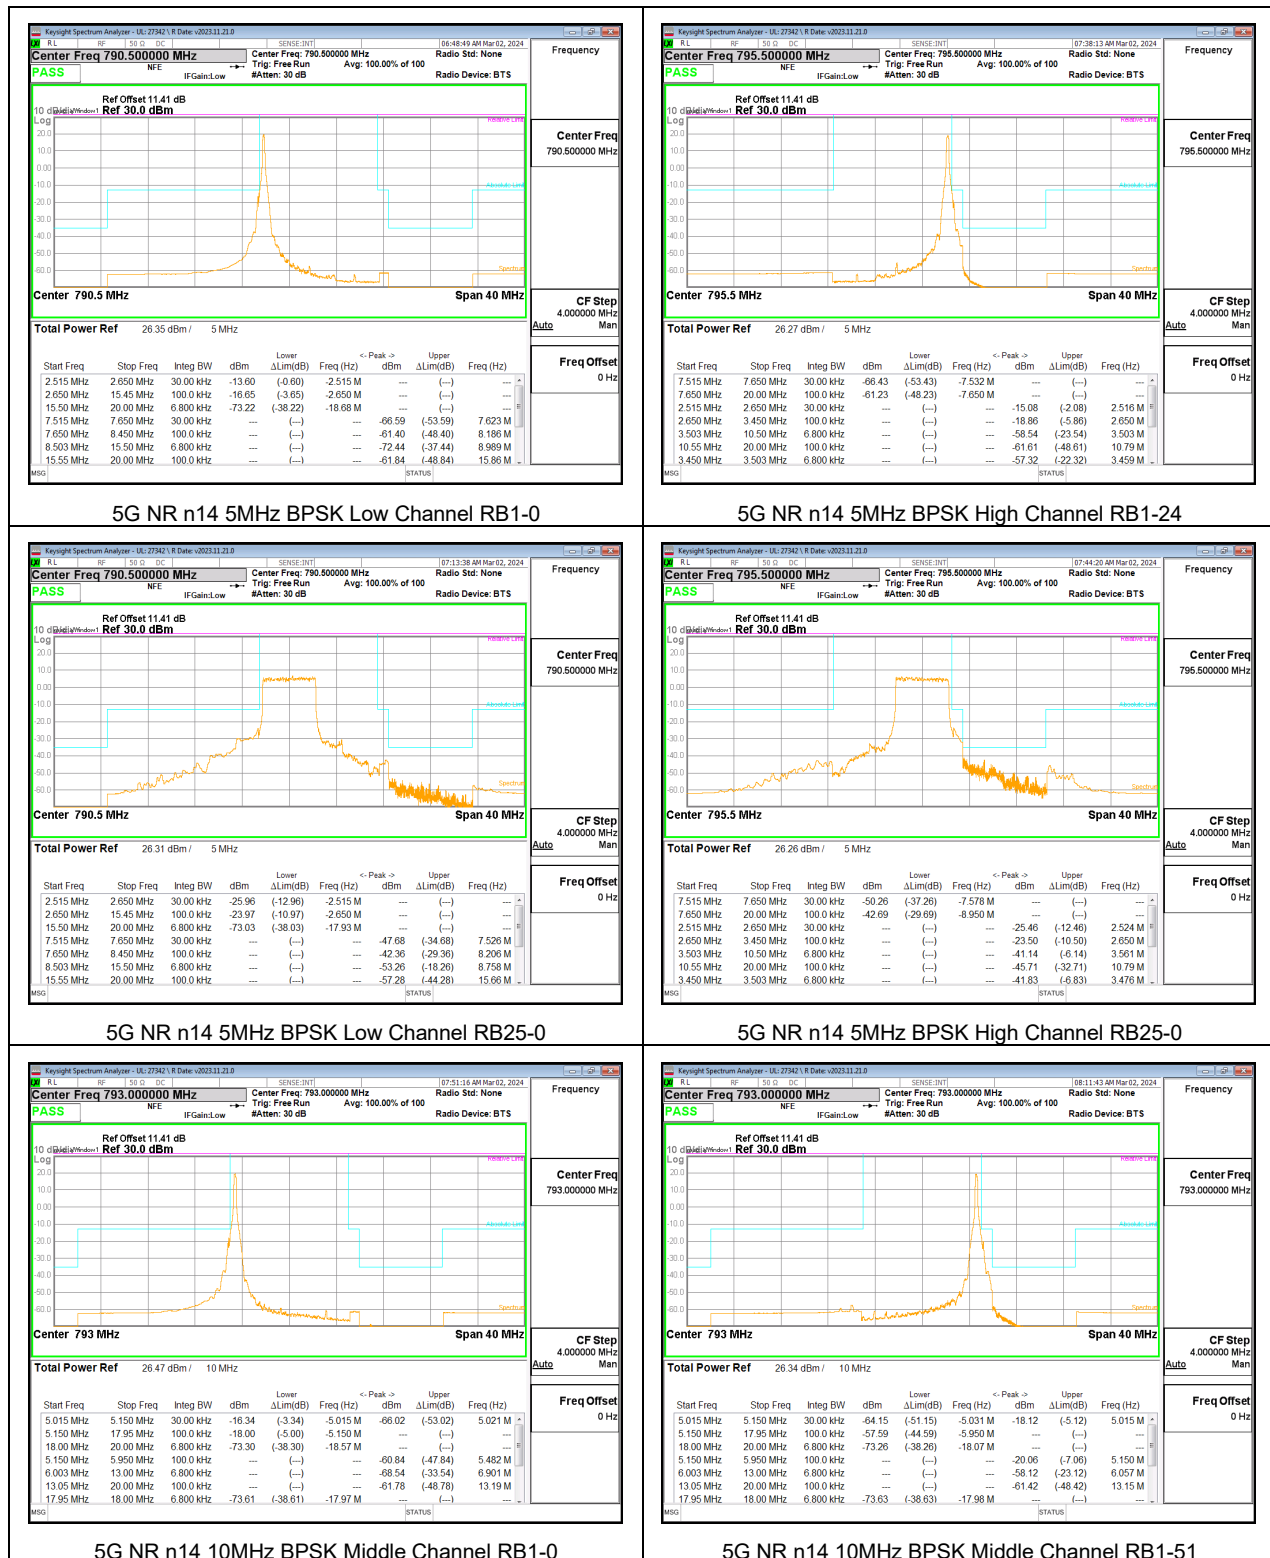

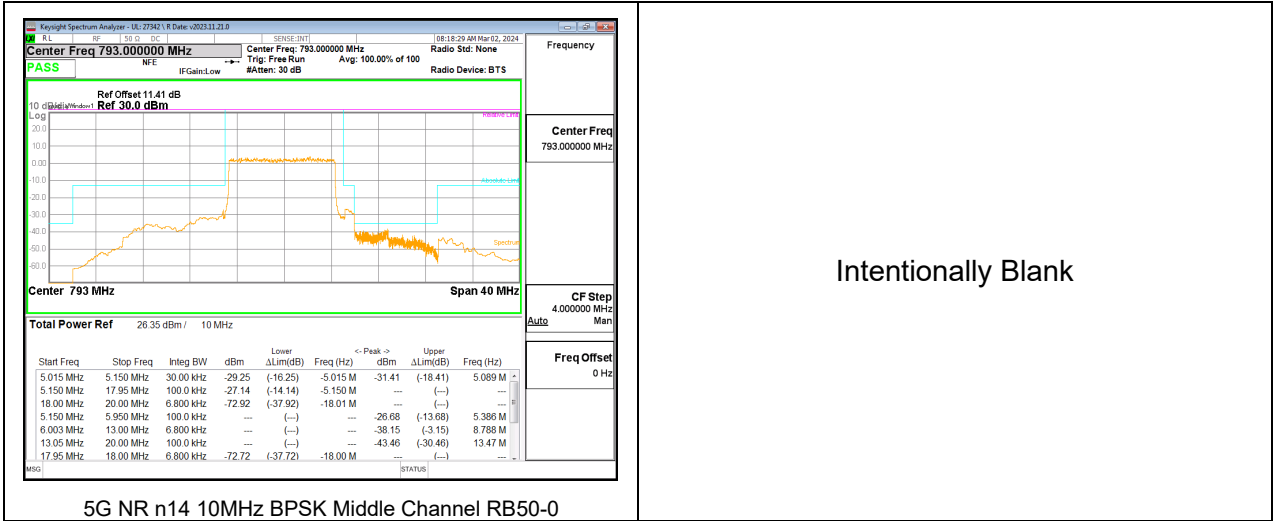

9.2.5. LTE BAND 17 EMISSION MASK

LIMITS

FCC: §27.53

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.






9.2.6. LTE BAND 25 AND 5G NR n25 EMISSION MASK


LIMITS

FCC: §24.238 (a)


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

LTE BAND 25 BANDEDGE

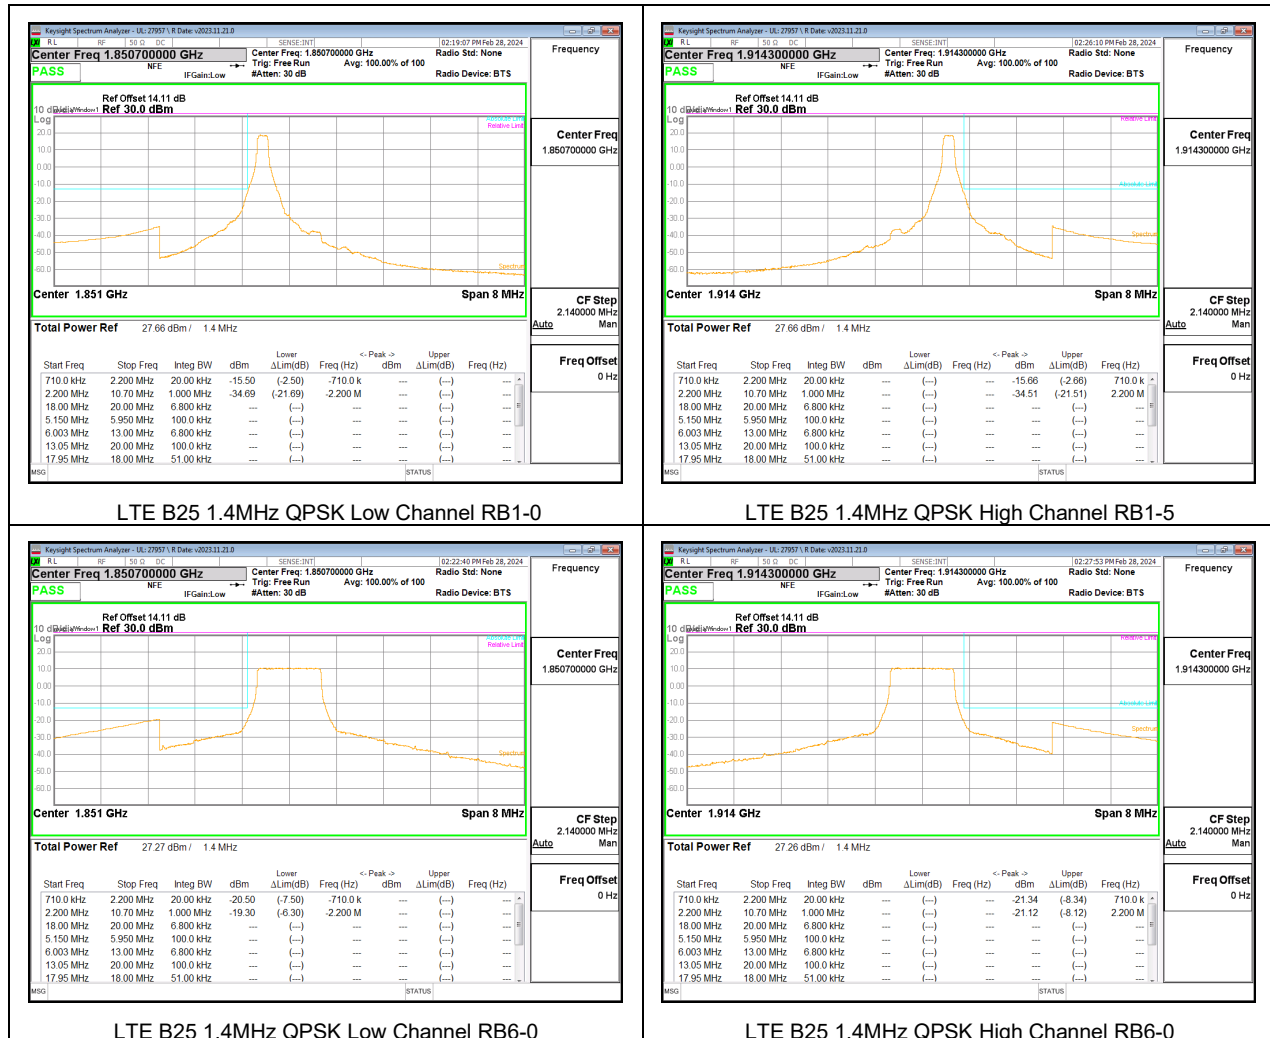


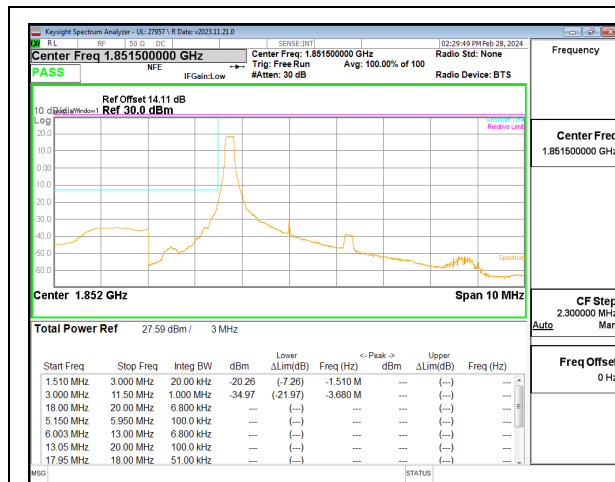


LTE B25 3MHz QPSK Low Channel RB1-0

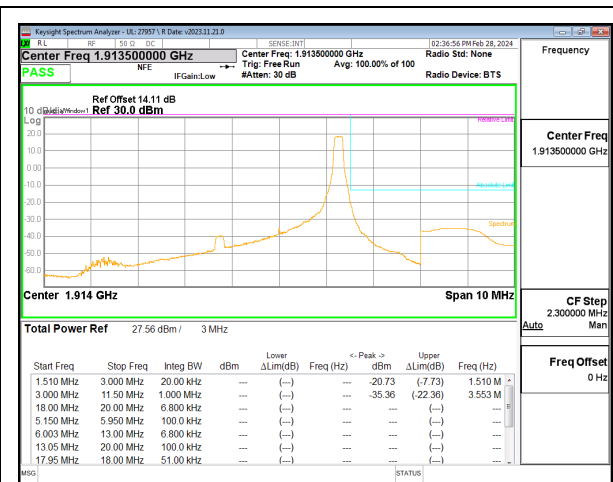


LTE B25 3MHz QPSK High Channel RB1-14

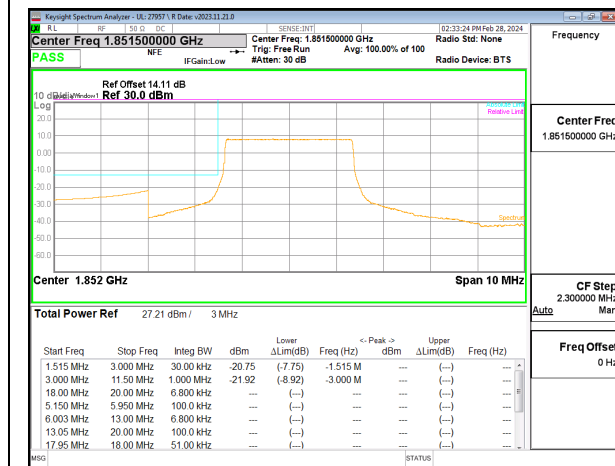


LTE B25 3MHz QPSK Low Channel RB15-0

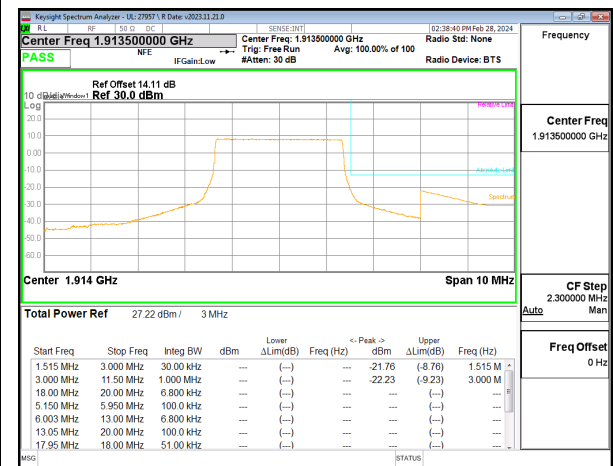

LTE B25 3MHz QPSK High Channel RB15-0

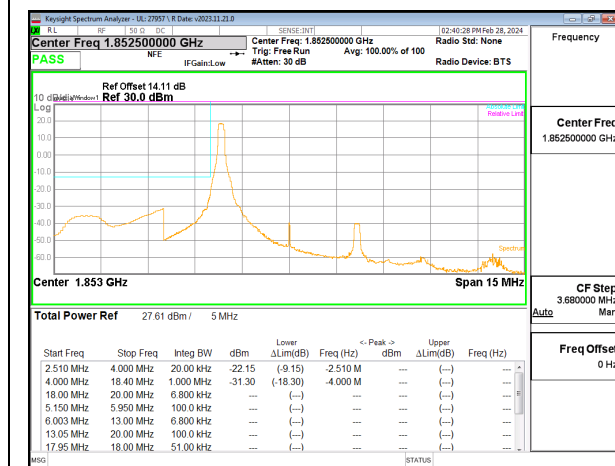


LTE B25 5MHz QPSK Low Channel RB1-0

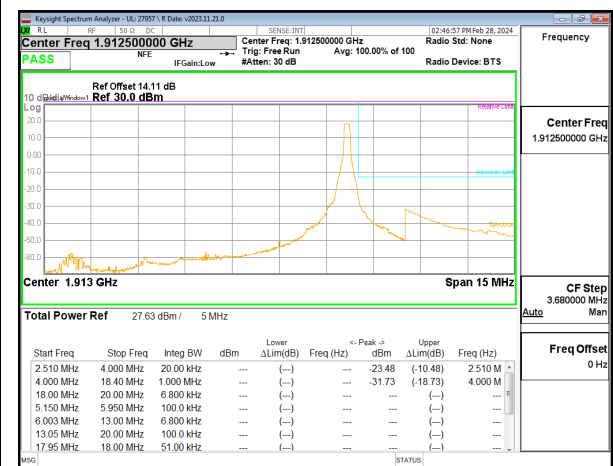


LTE B25 5MHz QPSK High Channel RB1-24






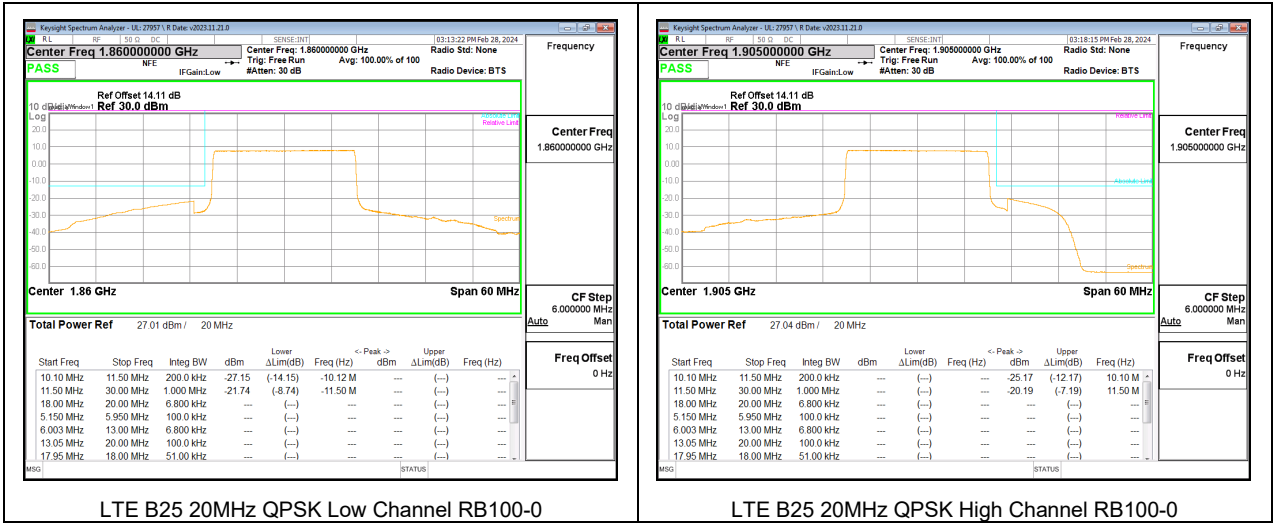


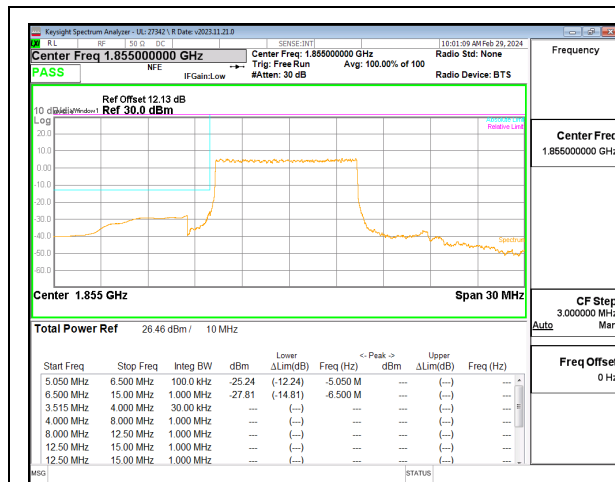


5G NR n25 10MHz BPSK Low Channel RB50-0

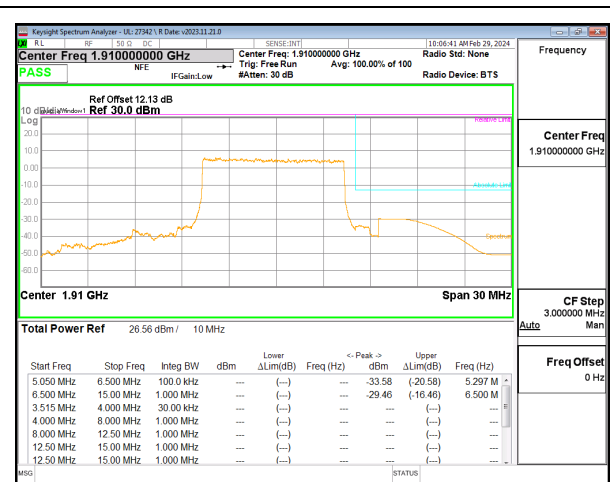


5G NR n25 10MHz BPSK High Channel RB50-0

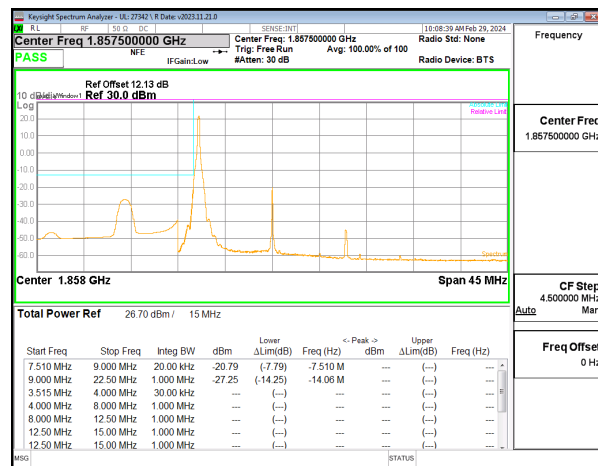


5G NR n25 15MHz BPSK Low Channel RB1-0

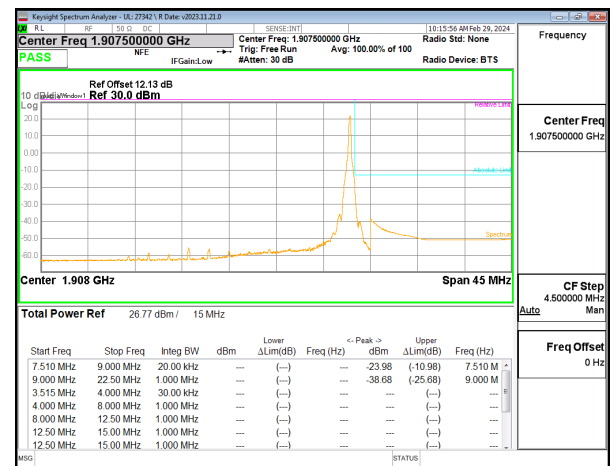


5G NR n25 15MHz BPSK High Channel RB1-78

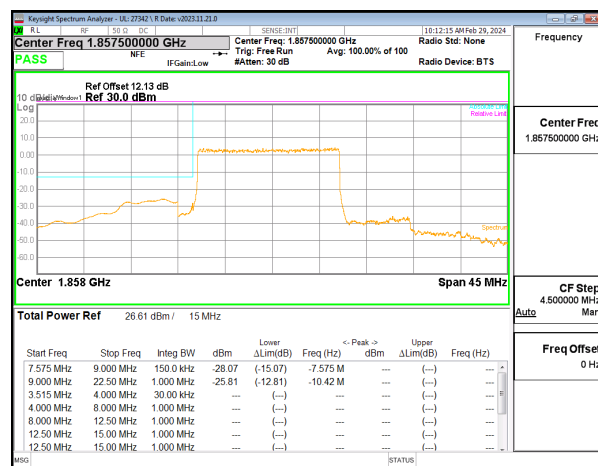


5G NR n25 15MHz BPSK Low Channel RB75-0

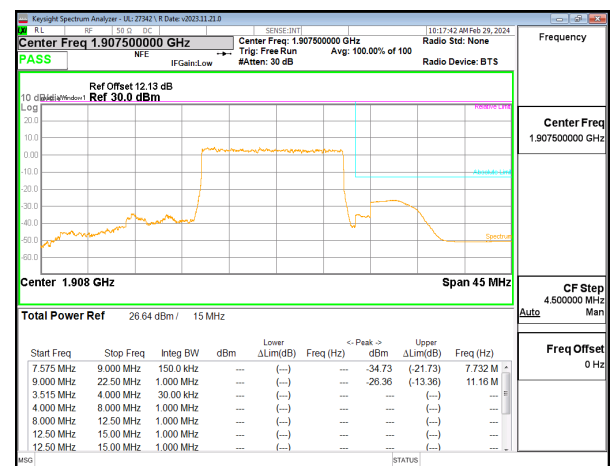


5G NR n25 15MHz BPSK High Channel RB75-0

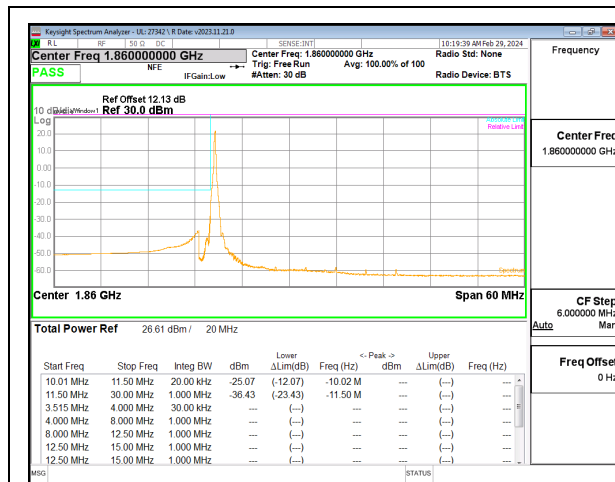


5G NR n25 20MHz BPSK Low Channel RB1-0

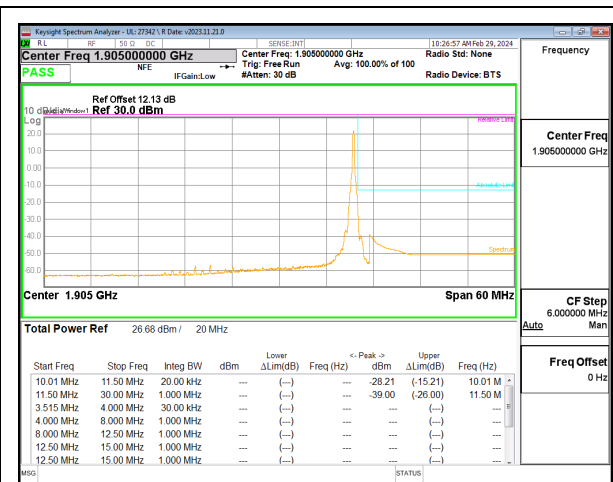


5G NR n25 20MHz BPSK High Channel RB1-105

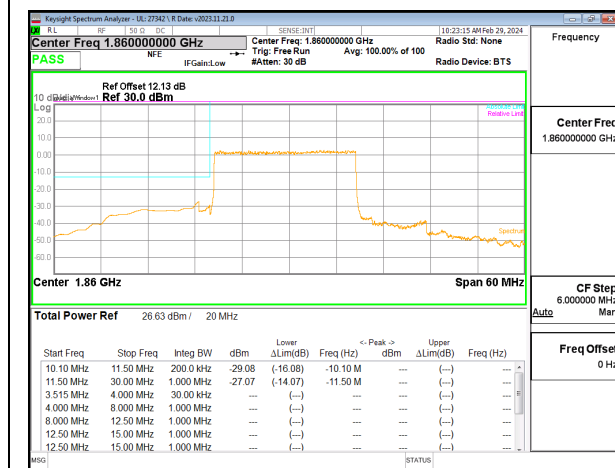


5G NR n25 20MHz BPSK Low Channel RB100-0

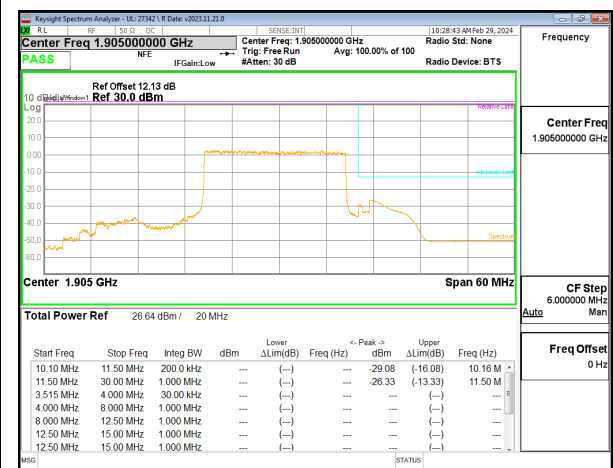


5G NR n25 20MHz BPSK High Channel RB100-0

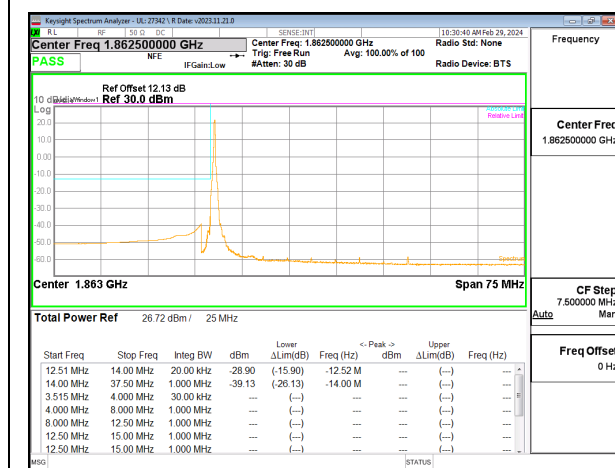


5G NR n25 25MHz BPSK Low Channel RB1-0

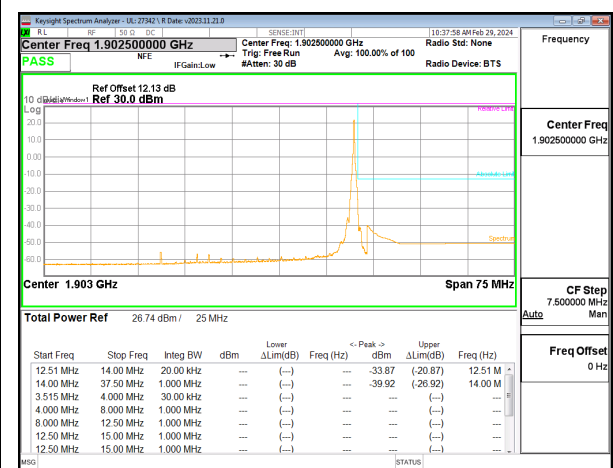


5G NR n25 25MHz BPSK High Channel RB1-132

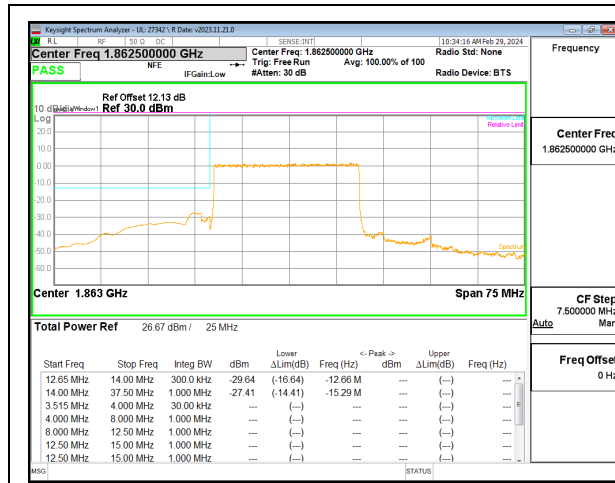


5G NR n25 25MHz BPSK Low Channel RB128-0

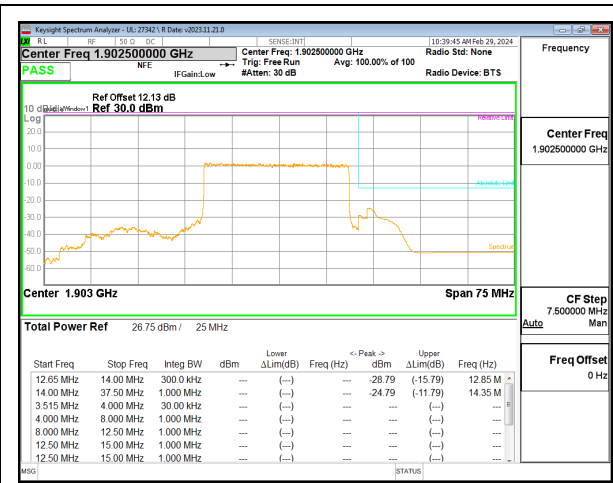


5G NR n25 25MHz BPSK High Channel RB128-0

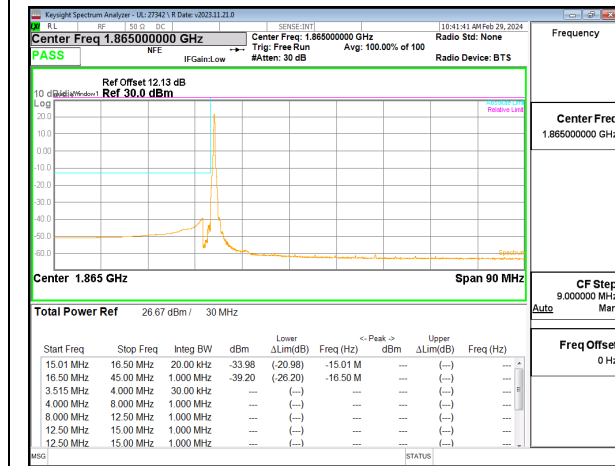


5G NR n25 30MHz BPSK Low Channel RB1-0

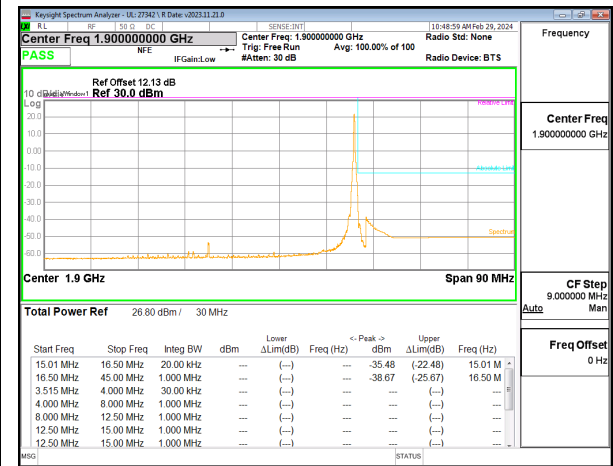

5G NR n25 30MHz BPSK High Channel RB1-159

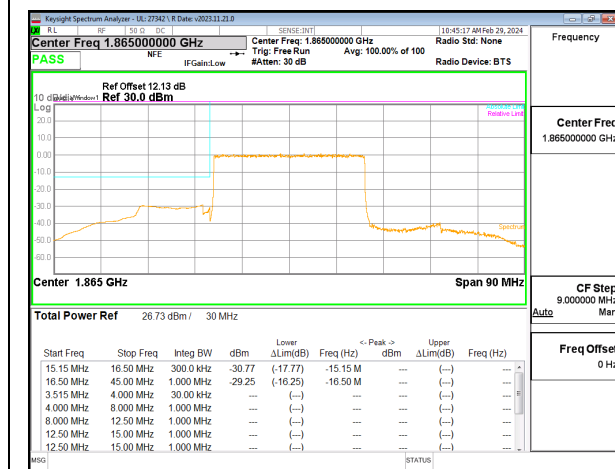

5G NR n25 30MHz BPSK Low Channel RB160-0

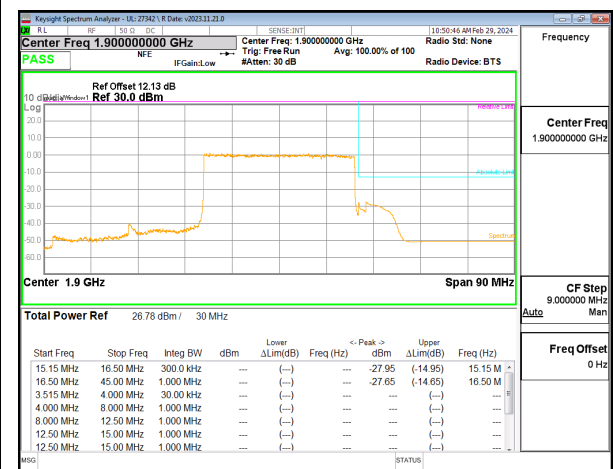

5G NR n25 30MHz BPSK High Channel RB160-0