


LINE 2 RESULTS

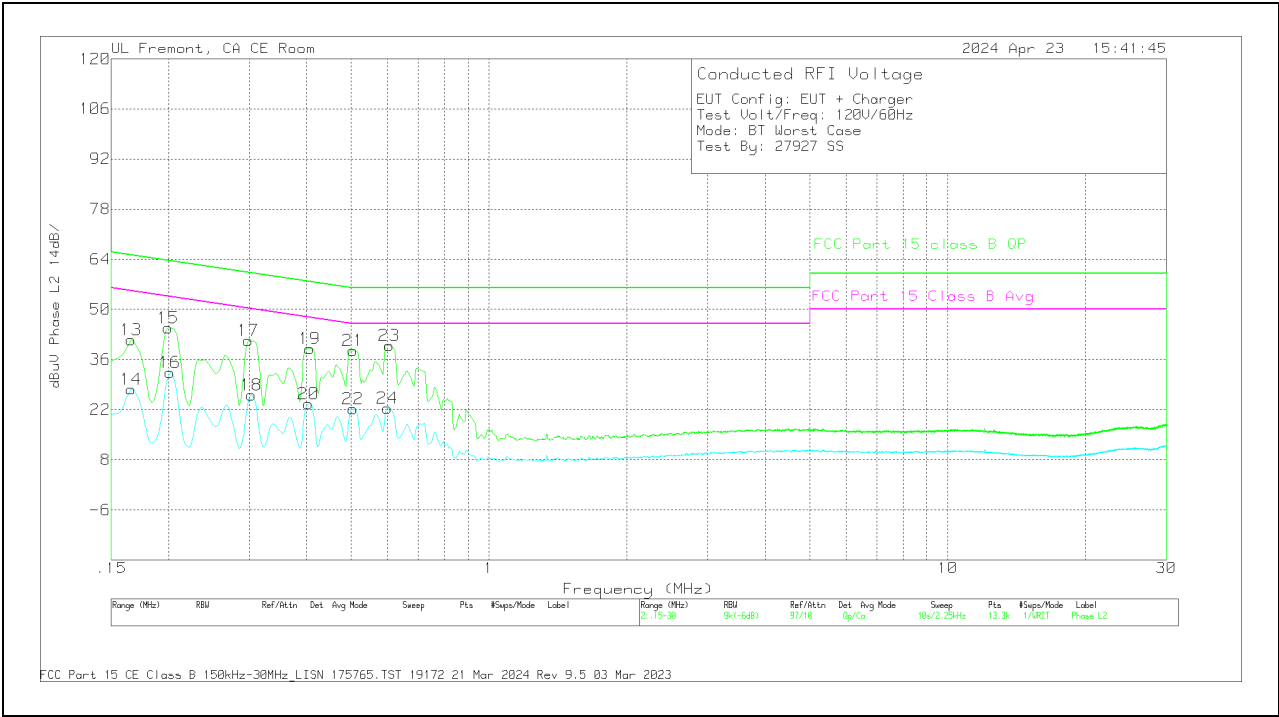

DATA


Range 2: Phase L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Cbl (dB)	LISN (dB)	Trns Limiter (dB)	10 dB Pad	Corrected Reading (dBuV)	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
14	.1658	8.13	Ca	0	.1	9.5	10	27.73	55.17	-27.44	-	-
16	.2018	12.95	Ca	.1	0	9.4	10	32.45	53.54	-21.09	-	-
18	.303	6.65	Ca	.1	0	9.4	10	26.15	50.16	-24.01	-	-
20	.4043	4.14	Ca	.1	0	9.4	10	23.64	47.77	-24.13	-	-
22	.5055	2.87	Ca	0	0	9.3	10	22.17	46	-23.83	-	-
24	.6	2.85	Ca	.1	0	9.4	10	22.35	46	-23.65	-	-
13	.1658	21.84	Qp	0	.1	9.5	10	41.44	-	-	65.17	-23.73
15	.1995	25.31	Qp	.1	0	9.4	10	44.81	-	-	63.63	-18.82
17	.2985	21.83	Qp	.1	0	9.4	10	41.33	-	-	60.28	-18.95
19	.4065	19.62	Qp	.1	0	9.4	10	39.12	-	-	57.72	-18.6
21	.5055	19.23	Qp	0	0	9.3	10	38.53	-	-	56	-17.47
23	.6068	20.49	Qp	.1	0	9.4	10	39.99	-	-	56	-16.01

Qp - Quasi-Peak detector
Ca - CISPR average detection

11.2.

AC POWER LINE WITH LAPTOP

LINE 1 RESULTS

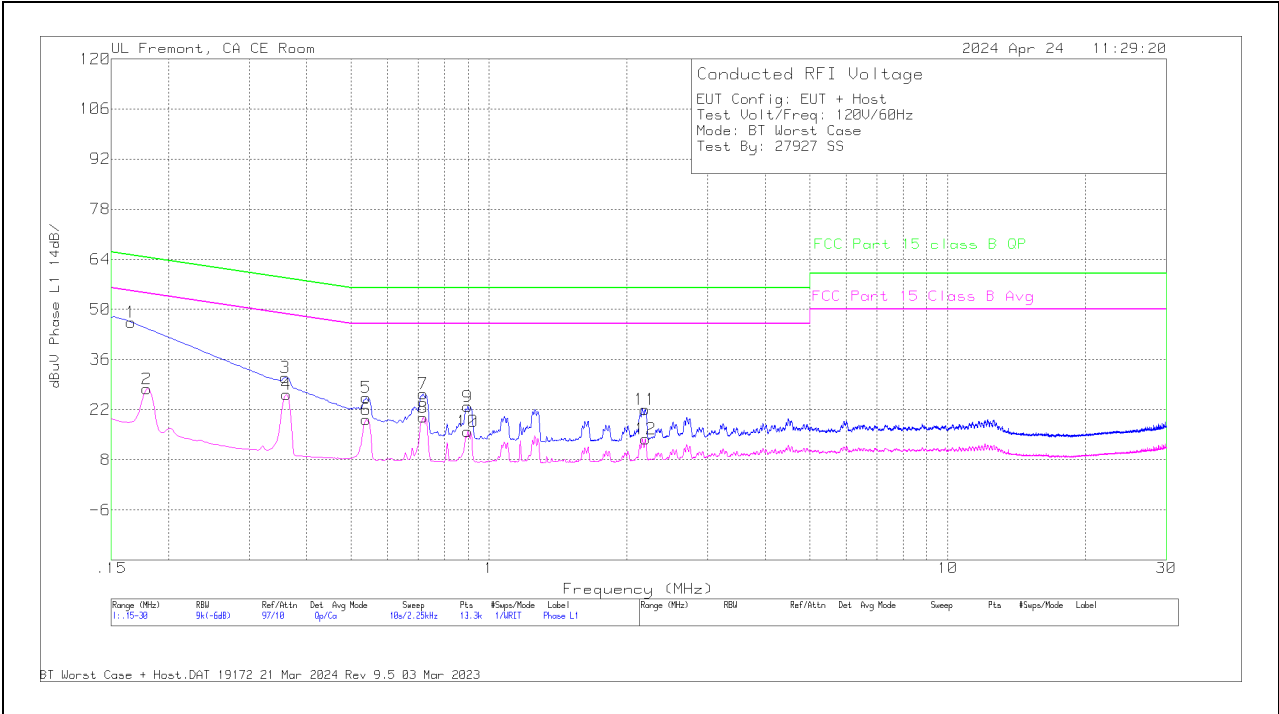


DATA

Range 1: Phase L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBUV)	Det	Cbl (dB)	LISN (dB)	Trns Limiter (dB)	10 dB Pad	Corrected Reading (dBUV)	FCC Part 15 Class B Avg (dBUV)	Margin (dB)	FCC Part 15 class B QP (dBUV)	Margin (dB)
2	.1793	8.16	Ca	.1	.1	9.4	10	27.76	54.52	-26.76	-	-
4	.3615	6.8	Ca	0	0	9.4	10	26.2	48.69	-22.49	-	-
6	.5393	-.12	Ca	.1	0	9.3	10	19.28	46	-26.72	-	-
8	.7193	.45	Ca	.1	0	9.3	10	19.85	46	-26.15	-	-
10	.8993	-3.58	Ca	.1	0	9.4	10	15.92	46	-30.08	-	-
12	2.193	-5.75	Ca	.1	0	9.4	10	13.75	46	-32.25	-	-
1	.1658	26.84	Qp	0	.1	9.5	10	46.44	-	-	65.17	-18.73
3	.3593	11.61	Qp	0	0	9.4	10	31.01	-	-	58.75	-27.74
5	.5393	5.94	Qp	.1	0	9.3	10	25.34	-	-	56	-30.66
7	.7193	7.08	Qp	.1	0	9.3	10	26.48	-	-	56	-29.52
9	.8993	3.34	Qp	.1	0	9.4	10	22.84	-	-	56	-33.16
11	2.1908	2.51	Qp	.1	0	9.4	10	22.01	-	-	56	-33.99

Qp - Quasi-Peak detector
Ca - CISPR average detection

LINE 2 RESULTS

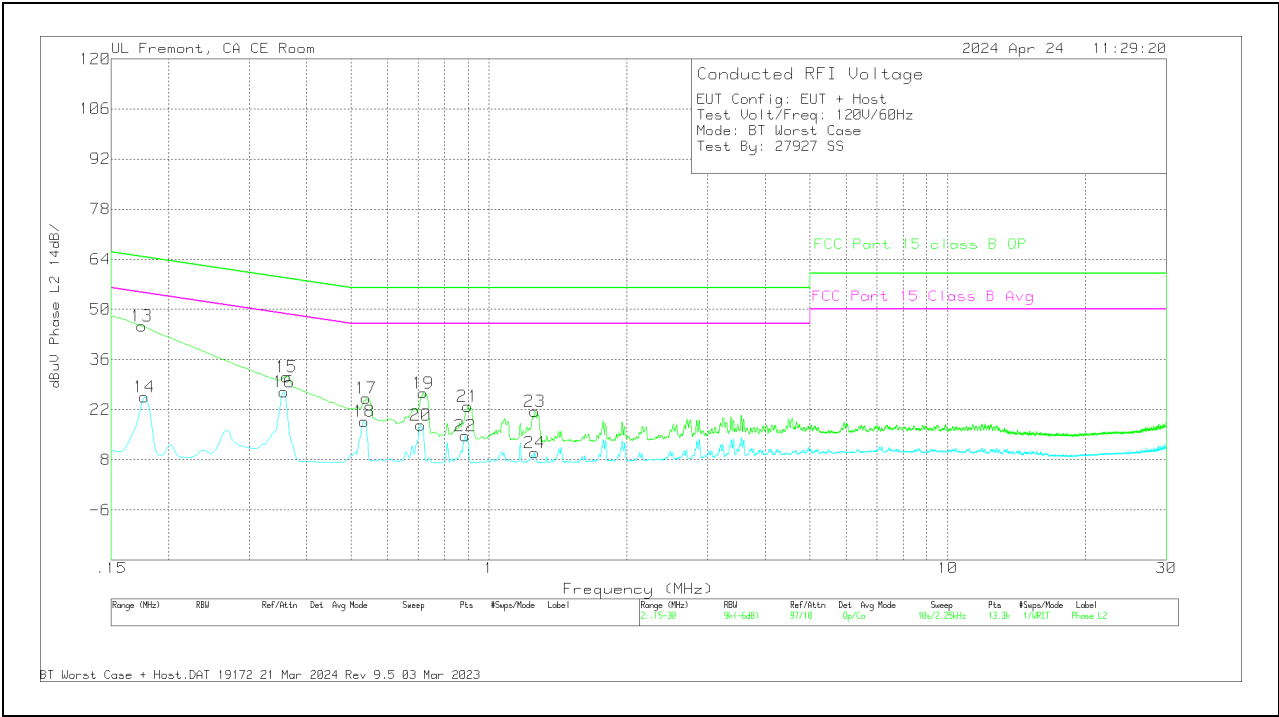

DATA

Range 2: Phase L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Cbl (dB)	LISN (dB)	Trns Limiter (dB)	10 dB Pad	Corrected Reading (dBuV)	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
14	.177	6.02	Ca	.1	0	9.4	10	25.52	54.63	-29.11	-	-
16	.357	7.46	Ca	.1	0	9.4	10	26.96	48.8	-21.84	-	-
18	.5348	-.58	Ca	0	0	9.3	10	18.72	46	-27.28	-	-
20	.7103	-1.58	Ca	0	0	9.3	10	17.72	46	-28.28	-	-
22	.888	-4.76	Ca	0	0	9.4	10	14.64	46	-31.36	-	-
24	1.257	-9.58	Ca	.1	0	9.4	10	9.92	46	-36.08	-	-
13	.1748	25.81	Qp	0	0	9.5	10	45.31	-	-	64.73	-19.42
15	.3615	11.7	Qp	.1	0	9.4	10	31.2	-	-	58.69	-27.49
17	.5393	5.86	Qp	0	0	9.3	10	25.16	-	-	56	-30.84
19	.7193	7.38	Qp	0	0	9.3	10	26.68	-	-	56	-29.32
21	.8993	3.5	Qp	0	0	9.4	10	22.9	-	-	56	-33.1
23	1.2593	2	Qp	.1	0	9.4	10	21.5	-	-	56	-34.5

Qp - Quasi-Peak detector
Ca - CISPR average detection

12. SETUP PHOTOS

Please refer to 14982489-EP1V1 for setup photos

END OF TEST REPORT