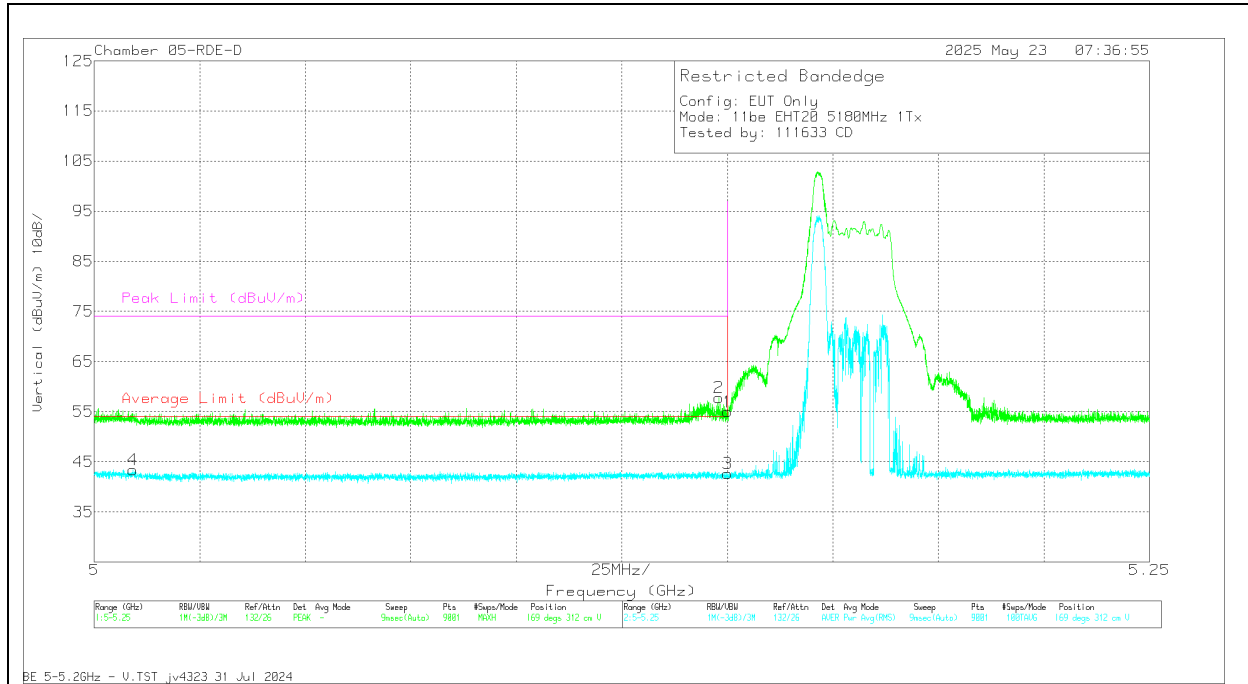


1TX Antenna 6 MODE: PARTIAL RU 26**BANDEDGE (LOW CHANNEL / 5180MHz)****VERTICAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.009195	48.55	RMS	34.2	0	-39.36	43.39	54	-10.61	-	-	169	312	V
2	5.148057	62.74	Pk	34.3	0	-39.29	57.75	-	-	74	-16.25	169	312	V
1	5.15	59.92	Pk	34.3	0	-39.25	54.97	-	-	74	-19.03	169	312	V
3	5.15	47.56	RMS	34.3	0	-39.25	42.61	54	-11.39	-	-	169	312	V

Pk - Peak detector

RMS - RMS detection

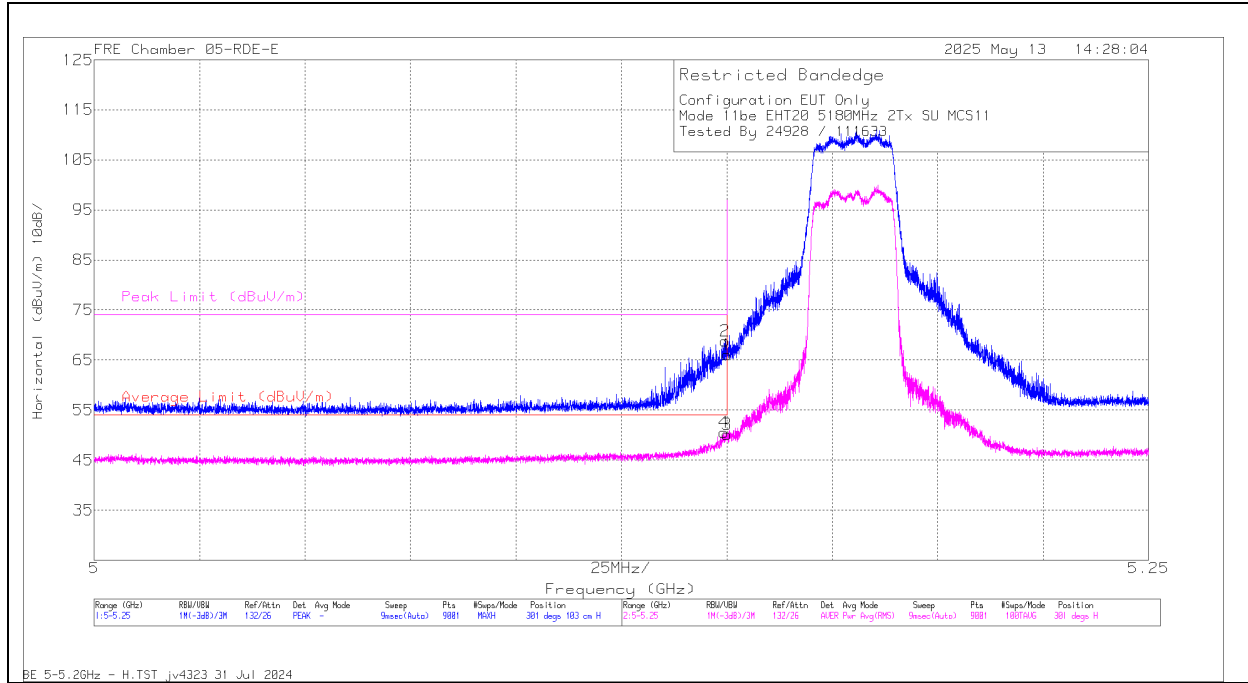
10.1.5. 802.11be MIMO SU MODE IN UNII-1 BAND – BANDEDGE

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	5180	6 + 5	* 5.15	66.25	Pk	34.1	-34.3	0	66.05	-	-	74	-7.95	301	103	H
			* 5.149612	69	Pk	34.1	-34.3	0	68.8	-	-	74	-5.2	301	103	H
			* 5.15	49.7	RMS	34.1	-34.3	0	49.5	54	-4.5	-	-	301	103	H
			* 5.14939	50.1	RMS	34.1	-34.3	0	49.9	54	-4.1	-	-	301	103	H
			* 5.15	59.43	Pk	34.1	-34.3	0	59.23	-	-	74	-14.77	322	261	V
			* 5.148473	64.39	Pk	34.1	-34.3	0	64.19	-	-	74	-9.81	322	261	V
			* 5.15	46.37	RMS	34.1	-34.3	0	46.17	54	-7.83	-	-	322	261	V
			* 5.148168	47.48	RMS	34.1	-34.3	0	47.28	54	-6.72	-	-	322	261	V
EHT40 (SU Mode)	5190	6 + 5	* 5.15	67.16	Pk	34.1	-34.3	0	66.96	-	-	74	-7.04	6	190	H
			* 5.149779	67.86	Pk	34.1	-34.3	0	67.66	-	-	74	-6.34	6	190	H
			* 5.15	48.4	RMS	34.1	-34.3	0	48.2	54	-5.8	-	-	6	190	H
			* 5.148529	50.83	RMS	34.1	-34.3	0	50.63	54	-3.37	-	-	6	190	H
			* 5.15	61.52	Pk	34.1	-34.3	0	61.32	-	-	74	-12.68	3	160	V
			* 5.149473	67.04	Pk	34.1	-34.3	0	66.84	-	-	74	-7.16	3	160	V
			* 5.15	47.7	RMS	34.1	-34.3	0	47.5	54	-6.5	-	-	3	160	V
			* 5.148751	50.27	RMS	34.1	-34.3	0	50.07	54	-3.93	-	-	3	160	V
EHT80 (SU Mode)	5210	6 + 5	* 5.15	63.6	Pk	34.1	-34.3	0	63.4	-	-	74	-10.6	309	139	H
			* 5.130001	67.53	Pk	34	-34.4	0	67.13	-	-	74	-6.87	309	139	H
			* 5.15	46.49	RMS	34.1	-34.3	0	46.29	54	-7.71	-	-	309	139	H
			* 5.145835	49.3	RMS	34.1	-34.3	0	49.1	54	-4.9	-	-	309	139	H
			* 5.15	66.79	Pk	34.1	-34.3	0	66.59	-	-	74	-7.41	348	150	V
			* 5.149946	69.23	Pk	34.1	-34.3	0	69.03	-	-	74	-4.97	348	150	V
			* 5.15	48.46	RMS	34.1	-34.3	0	48.26	54	-5.74	-	-	348	150	V
			* 5.148668	50.14	RMS	34.1	-34.3	0	49.94	54	-4.06	-	-	348	150	V
EHT160 (SU Mode)	5250 (Lower)	6 + 5	* 5.15	67.45	Pk	34.4	-37.9	0	63.95	-	-	74	-10.05	163	153	H
			* 5.147473	71.33	Pk	34.4	-38	0	67.73	-	-	74	-6.27	163	153	H
			* 5.15	51.65	RMS	34.4	-37.9	0.14	48.29	54	-5.71	-	-	163	153	H
			* 5.126529	54.05	RMS	34.3	-37.75	0.14	50.74	54	-3.26	-	-	163	153	H
			* 5.15	64.69	Pk	34.4	-37.9	0	61.19	-	-	74	-12.81	216	315	V
			* 5.149723	67.04	Pk	34.4	-37.9	0	63.54	-	-	74	-10.46	216	315	V
			* 5.15	50.94	RMS	34.4	-37.9	0.14	47.58	54	-6.42	-	-	216	315	V
			* 5.149557	52.12	RMS	34.4	-37.9	0.14	48.76	54	-5.24	-	-	216	315	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

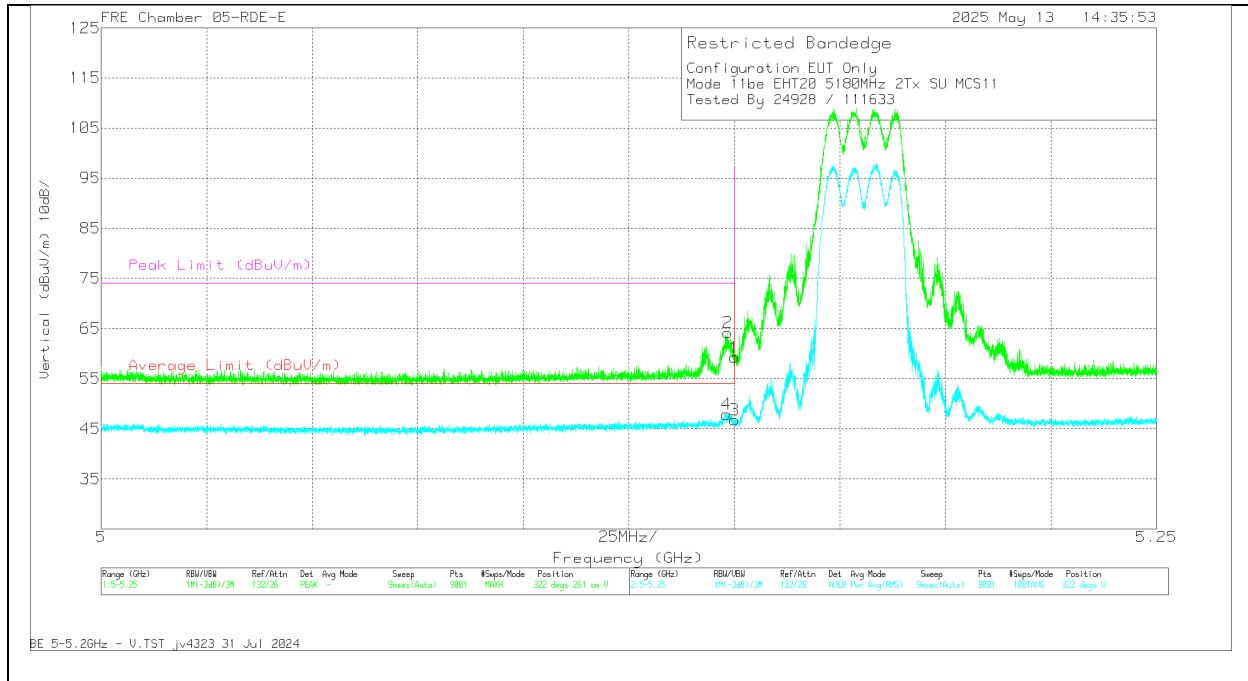
BANDEDGE (LOW CHANNEL / 5180MHz), SU MODE**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80404 ACF (dB/m)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	66.25	Pk	34.1	-34.3	0	66.05	-	-	74	-7.95	301	103	H
2	* 5.149612	69	Pk	34.1	-34.3	0	68.8	-	-	74	-5.2	301	103	H
3	* 5.15	49.7	RMS	34.1	-34.3	0	49.5	54	-4.5	-	-	301	103	H
4	* 5.14939	50.1	RMS	34.1	-34.3	0	49.9	54	-4.1	-	-	301	103	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5180MHz), SU MODE**VERTICAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80404 ACF (dB/m)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	59.43	Pk	34.1	-34.3	0	59.23	-	-	74	-14.77	322	261	V
2	* 5.148473	64.39	Pk	34.1	-34.3	0	64.19	-	-	74	-9.81	322	261	V
3	* 5.15	46.37	RMS	34.1	-34.3	0	46.17	54	-7.83	-	-	322	261	V
4	* 5.148168	47.48	RMS	34.1	-34.3	0	47.28	54	-6.72	-	-	322	261	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

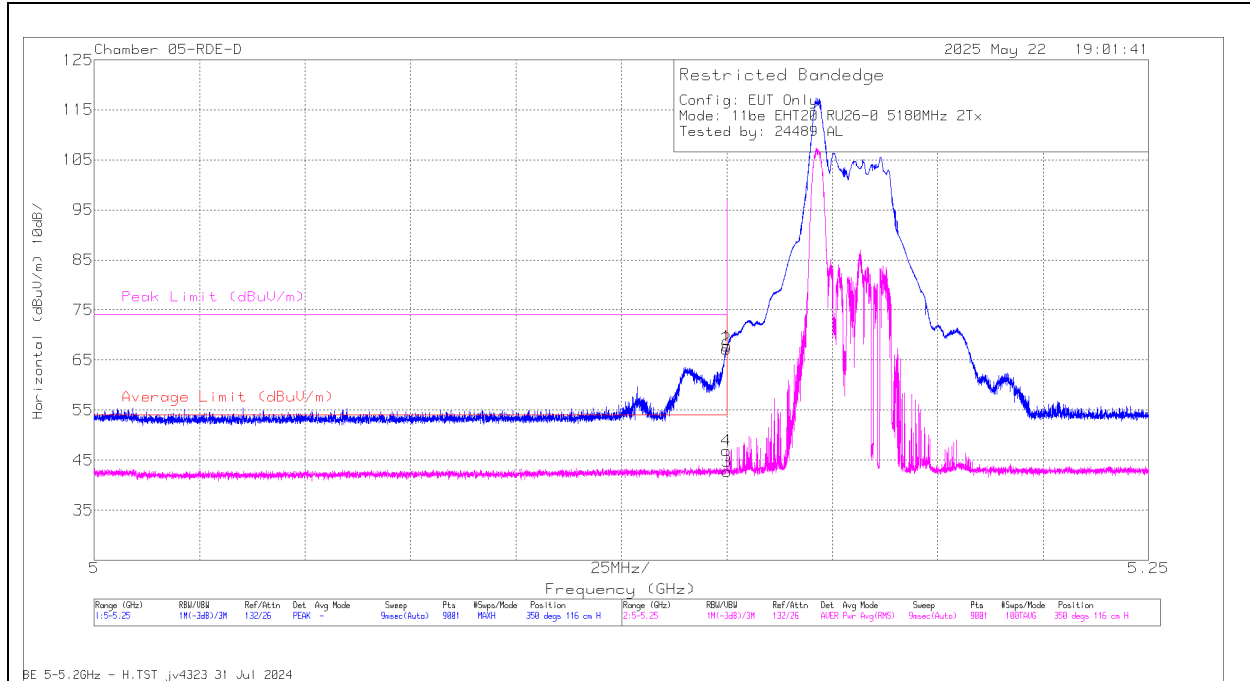
10.1.6. 802.11be MIMO PARTIAL RU MODE IN UNII-1 BAND – BANDEDGE

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 26 / Index 0)	5180	6 + 5	* 5.149862	72.14	Pk	34.3	-39.26	0	67.18	-	-	74	-6.82	350	116	H
			* 5.149946	51.88	RMS	34.3	-39.25	0	46.93	54	-7.07	-	-	350	116	H
			* 5.15	72.7	Pk	34.3	-39.25	0	67.75	-	-	74	-6.25	350	116	H
			* 5.15	47.66	RMS	34.3	-39.25	0	42.71	54	-11.29	-	-	350	116	H
			* 5.149946	70.41	Pk	34.3	-39.25	0	65.46	-	-	74	-8.54	43	378	V
			* 5.149946	49.12	RMS	34.3	-39.25	0	44.17	54	-9.83	-	-	43	378	V
			* 5.15	69.57	Pk	34.3	-39.25	0	64.62	-	-	74	-9.38	43	378	V
			* 5.15	47.76	RMS	34.3	-39.25	0	42.81	54	-11.19	-	-	43	378	V
EHT40 (RU 242 / Index 61)	5190	6 + 5	* 5.15	68.77	Pk	34.4	-38.33	0	64.84	-	-	74	-9.16	338	179	H
			* 5.14989	73.3	Pk	34.4	-38.33	0	69.37	-	-	74	-4.63	338	179	H
			* 5.15	54.05	RMS	34.4	-38.33	0.13	50.25	54	-3.75	-	-	338	179	H
			* 5.149446	54.32	RMS	34.4	-38.34	0.13	50.51	54	-3.49	-	-	338	179	H
			* 5.15	69.99	Pk	34.4	-38.33	0	66.06	-	-	74	-7.94	27	181	V
			* 5.148918	72.55	Pk	34.4	-38.34	0	68.61	-	-	74	-5.39	27	181	V
			* 5.15	51.48	RMS	34.4	-38.33	0.13	47.68	54	-6.32	-	-	27	181	V
			* 5.149001	53.85	RMS	34.4	-38.34	0.13	50.04	54	-3.96	-	-	27	181	V
EHT40 (MRU 52+26 / Index 70)	5190	6 + 5	* 5.15	61.47	Pk	34.4	-38.33	0	57.54	-	-	74	-16.46	351	276	H
			* 5.14964	63.37	Pk	34.4	-38.33	0	59.44	-	-	74	-14.56	351	276	H
			* 5.15	47.79	RMS	34.4	-38.33	0	43.86	54	-10.14	-	-	351	276	H
			* 5.147001	48.06	RMS	34.4	-38.33	0	44.13	54	-9.87	-	-	351	276	H
			* 5.15	61.72	Pk	34.4	-38.33	0	57.79	-	-	74	-16.21	18	206	V
			* 5.148946	63.16	Pk	34.4	-38.34	0	59.22	-	-	74	-14.78	18	206	V
			* 5.15	46.15	RMS	34.4	-38.33	0	42.22	54	-11.78	-	-	18	206	V
			* 5.148168	47.5	RMS	34.4	-38.34	0	43.56	54	-10.44	-	-	18	206	V
EHT80 (RU 242 / Index 61)	5210 (Lower)	6 + 5	* 5.149196	71.7	Pk	34.3	-36.7	0	69.3	-	-	74	-4.7	128	202	H
			* 5.149918	52.9	RMS	34.3	-36.68	0	50.52	54	-3.48	-	-	128	202	H
			* 5.15	70.29	Pk	34.3	-36.68	0	67.91	-	-	74	-6.09	128	202	H
			* 5.15	51.56	RMS	34.3	-36.68	0	49.18	54	-4.82	-	-	128	202	H
			* 5.147918	65.84	Pk	34.3	-36.72	0	63.42	-	-	74	-10.58	151	371	V
			* 5.148223	48.92	RMS	34.3	-36.72	0	46.5	54	-7.5	-	-	151	371	V
			* 5.15	58.58	Pk	34.3	-36.68	0	56.2	-	-	74	-17.8	151	371	V
			* 5.15	46.98	RMS	34.3	-36.68	0	44.6	54	-9.4	-	-	151	371	V
EHT80 (RU 52 / Index 37)	5210 (Lower)	6 + 5	* 5.099001	48.9	RMS	34.3	-36.85	0	46.35	54	-7.65	-	-	128	202	H
			* 5.14989	68.63	Pk	34.3	-36.68	0	66.25	-	-	74	-7.75	128	202	H
			* 5.15	68.07	Pk	34.3	-36.68	0	65.69	-	-	74	-8.31	128	202	H
			* 5.15	48.81	RMS	34.3	-36.68	0	46.43	54	-7.57	-	-	128	202	H
			* 5.131029	47.08	RMS	34.3	-36.78	0	44.6	54	-9.4	-	-	151	371	V
			* 5.147112	62.04	Pk	34.3	-36.76	0	59.58	-	-	74	-14.42	151	371	V
			* 5.15	57.36	Pk	34.3	-36.68	0	54.98	-	-	74	-19.02	151	371	V
			* 5.15	46.34	RMS	34.3	-36.68	0	43.96	54	-10.04	-	-	151	371	V
EHT160 (RU 242 / Index 61)	5250 (Lower)	6 + 5	* 5.15	69.5	Pk	34.1	-36.5	0	67.1	-	-	74	-6.9	289	165	H
			* 5.146946	70.62	Pk	34.1	-36.5	0	68.22	-	-	74	-5.78	289	165	H
			* 5.15	53.07	RMS	34.1	-36.5	0	50.67	54	-3.33	-	-	289	165	H
			* 5.149946	52.96	RMS	34.1	-36.51	0	50.55	54	-3.45	-	-	289	165	H
			* 5.15	62.16	Pk	34.1	-36.5	0	59.76	-	-	74	-14.24	339	227	V
			* 5.149418	66.95	Pk	34.1	-36.56	0	64.49	-	-	74	-9.51	339	227	V
			* 5.15	47.74	RMS	34.1	-36.5	0	45.34	54	-8.66	-	-	339	227	V
			* 5.149835	49.28	RMS	34.1	-36.52	0	46.86	54	-7.14	-	-	339	227	V
EHT160 (RU 52 / Index 37)	5250 (Lower)	6 + 5	* 5.14364	60.32	Pk	34.2	-38.5	0	56.02	-	-	74	-17.98	180	127	H
			* 5.146335	48.2	RMS	34.3	-38.4	0	44.1	54	-9.9	-	-	180	127	H
			* 5.15	58.09	Pk	34.3	-38.27	0	54.12	-	-	74	-19.88	180	127	H
			* 5.15	47.41	RMS	34.3	-38.27	0	43.44	54	-10.56	-	-	180	127	H
			* 5.131612	60.24	Pk	34.2	-38.5	0	55.94	-	-	74	-18.06	198	390	V
			* 5.147918	48.12	RMS	34.3	-38.34	0	44.08	54	-9.92	-	-	198	390	V
			* 5.15	57.8	Pk	34.3	-38.27	0	53.83	-	-	74	-20.17	198	390	V
			* 5.15	47.13	RMS	34.3	-38.27	0	43.16	54	-10.84	-	-	198	390	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

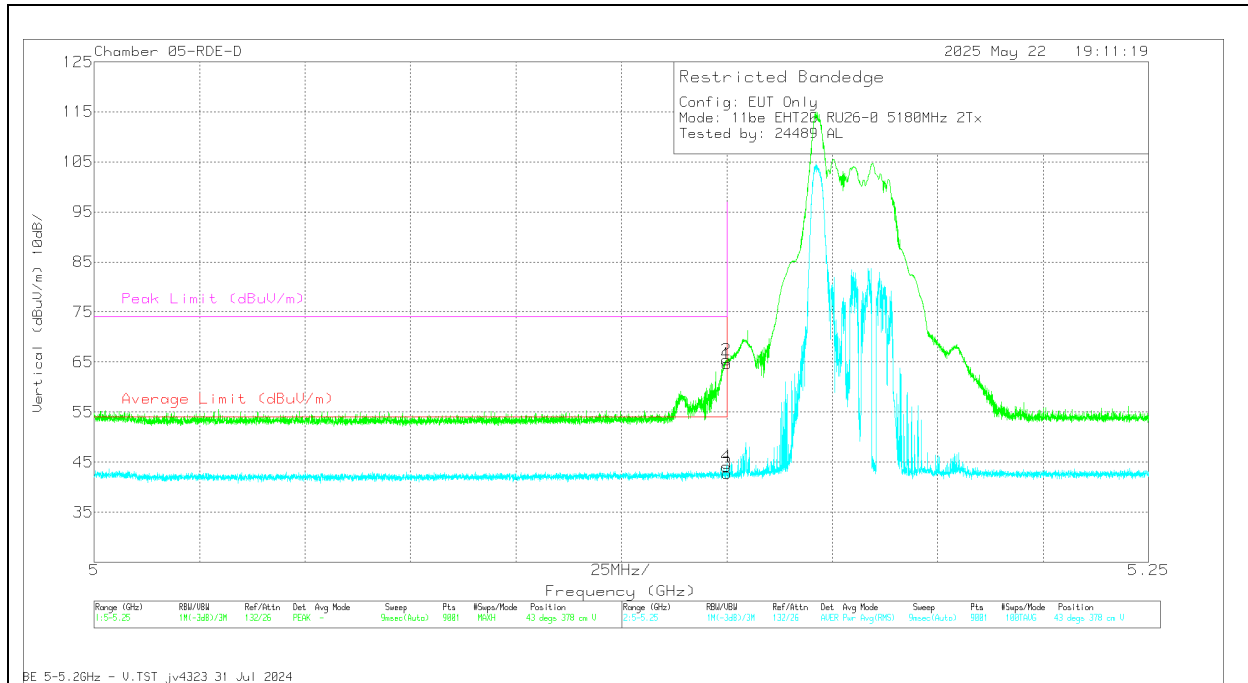
RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5180MHz), PARTIAL RU 26**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF (dB/m)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.149862	72.14	Pk	34.3	-39.26	0	67.18	-	-	74	-6.82	350	116	H
4	* 5.149946	51.88	RMS	34.3	-39.25	0	46.93	54	-7.07	-	-	350	116	H
1	* 5.15	72.7	Pk	34.3	-39.25	0	67.75	-	-	74	-6.25	350	116	H
3	* 5.15	47.66	RMS	34.3	-39.25	0	42.71	54	-11.29	-	-	350	116	H

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5180MHz), PARTIAL RU 26**VERTICAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF (dB/m)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.149946	70.41	Pk	34.3	-39.25	0	65.46	-	-	74	-8.54	43	378	V
4	* 5.149946	49.12	RMS	34.3	-39.25	0	44.17	-	-9.83	-	-	43	378	V
1	* 5.15	69.57	Pk	34.3	-39.25	0	64.62	-	-	74	-9.38	43	378	V
3	* 5.15	47.76	RMS	34.3	-39.25	0	42.81	-	-11.19	-	-	43	378	V

Pk - Peak detector

RMS - RMS detection

10.1.7. 802.11n/ac MIMO MODE IN UNII-1 BAND – SPURIOUS EMISSIONS

20MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5180	6 + 5	* 4.002081	55.47	PK-U	33.5	-46.01	0	42.96	-	-	74	-31.04	317	159	H
			* 4.004311	44.05	ADR	33.5	-46.06	0	31.49	54	-22.51	-	-	317	159	H
			* 3.991577	55.71	PK-U	33.5	-46.02	0	43.19	-	-	74	-30.81	143	141	V
			* 3.992251	44.05	ADR	33.5	-46.04	0	31.51	54	-22.49	-	-	143	141	V
			1.843313	60.7	PK-U	30.7	-49.4	0	42	-	-	68.2	-26.2	227	216	V
			1.843755	60.86	PK-U	30.7	-49.39	0	42.17	-	-	68.2	-26.03	253	299	H
			10.010352	55.38	PK-U	37.2	-45.83	0	46.75	-	-	68.2	-21.45	26	236	H
			10.017307	55.71	PK-U	37.2	-46.01	0	46.9	-	-	68.2	-21.3	291	230	V
	5200	6 + 5	* 4.015487	56.79	PK-U	33.4	-46.04	0	44.15	-	-	74	-29.85	304	376	H
			* 4.016036	44.72	ADR	33.4	-46.05	0	32.07	54	-21.93	-	-	304	376	H
			* 3.999723	55.14	PK-U	33.5	-45.95	0	42.69	-	-	74	-31.31	23	199	V
			* 4.000214	44.15	ADR	33.5	-45.95	0	31.7	54	-22.3	-	-	23	199	V
			* 11.866683	53.26	PK-U	38.6	-42.99	0	48.87	-	-	74	-25.13	50	348	H
			* 11.867907	40.72	ADR	38.6	-42.96	0	36.36	54	-17.64	-	-	50	348	H
			* 11.814397	52.18	PK-U	38.6	-42.7	0	48.08	-	-	74	-25.92	84	159	V
			* 11.81604	40.83	ADR	38.6	-42.78	0	36.65	54	-17.35	-	-	84	159	V
			1.940428	60.94	PK-U	31.2	-48.96	0	43.18	-	-	68.2	-25.02	31	142	V
			1.941354	61.09	PK-U	31.2	-48.96	0	43.33	-	-	68.2	-24.87	180	224	H
	5240	6 + 5	* 4.001365	55.37	PK-U	33.5	-45.98	0	42.89	-	-	74	-31.11	331	255	H
			* 4.003153	43.98	ADR	33.5	-46.04	0	31.44	54	-22.56	-	-	331	255	H
			* 4.011903	55.96	PK-U	33.4	-46.01	0	43.35	-	-	74	-30.65	90	114	V
			* 4.011256	44.2	ADR	33.4	-46	0	31.6	54	-22.4	-	-	90	114	V
			1.788518	59.89	PK-U	30.2	-49.13	0	40.96	-	-	68.2	-27.24	218	218	V
			1.806768	59.62	PK-U	30.4	-49.18	0	40.84	-	-	68.2	-27.36	118	202	H
			10.034223	55.66	PK-U	37.2	-45.71	0	47.15	-	-	68.2	-21.05	58	287	V
			10.055447	55.52	PK-U	37.3	-45.32	0	47.5	-	-	68.2	-20.7	84	123	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5190	6 + 5	* 1.324637	61.53	PK-U	29.3	-47.8	0	43.03	-	-	74	-30.97	1	100	H
			* 1.324197	49.21	ADR	29.3	-47.8	0	30.71	54	-23.29	-	-	1	100	H
			* 3.890802	55.82	PK-U	33.2	-45.9	0	43.12	-	-	74	-30.88	1	100	H
			* 3.891562	44.56	ADR	33.2	-45.84	0	31.92	54	-22.08	-	-	1	100	H
			* 1.326248	60.46	PK-U	29.3	-47.8	0	41.96	-	-	74	-32.04	1	100	V
			* 1.327115	48.76	ADR	29.3	-47.8	0	30.26	54	-23.74	-	-	1	100	V
			* 3.893138	55.91	PK-U	33.2	-45.8	0	43.31	-	-	74	-30.69	1	100	V
			* 3.890295	44.64	ADR	33.2	-45.9	0	31.94	54	-22.06	-	-	1	100	V
			* 11.439964	55.29	PK-U	38.2	-43.6	0	49.89	-	-	74	-24.11	1	199	H
			* 11.441318	42.92	ADR	38.2	-43.6	0	37.52	54	-16.48	-	-	1	199	H
			* 11.442898	54.71	PK-U	38.2	-43.6	0	49.31	-	-	74	-23.69	1	101	V
			* 11.440784	44.23	ADR	38.2	-43.6	0	38.83	54	-15.17	-	-	1	101	V
	5230	6 + 5	* 1.220349	60.33	PK-U	28.9	-48.07	0	41.16	-	-	74	-32.84	0	198	H
			* 1.220725	48.91	ADR	29	-48.03	0	29.88	54	-24.12	-	-	0	198	H
			* 3.910554	56.3	PK-U	33.2	-45.9	0	43.6	-	-	74	-30.4	0	101	H
			* 3.910767	44.27	ADR	33.2	-45.9	0	31.57	54	-22.43	-	-	0	101	H
			* 1.218916	60.39	PK-U	28.9	-48.09	0	41.2	-	-	74	-32.8	0	101	V
			* 1.219276	48.22	ADR	28.9	-48.1	0	29.02	54	-24.98	-	-	0	101	V
			* 3.906974	55.88	PK-U	33.2	-45.8	0	43.28	-	-	74	-30.72	0	101	V
			* 3.906042	44.26	ADR	33.2	-45.8	0	31.66	54	-22.34	-	-	0	101	V
			* 11.343077	56.21	PK-U	38.2	-43.3	0	51.11	-	-	74	-22.89	0	101	H
			* 11.343332	43.96	ADR	38.2	-43.3	0	38.86	54	-15.14	-	-	0	101	H
			* 11.343443	55.75	PK-U	38.2	-43.3	0	50.65	-	-	74	-23.35	0	101	V
			* 11.343207	43.99	ADR	38.2	-43.3	0	38.89	54	-15.11	-	-	0	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5210	6 + 5	* 1.347901	61.74	PK-U	28.5	-49.6	0	40.64	-	-	74	-33.36	360	101	H
			* 1.347084	50.01	ADR	28.5	-49.6	0	28.91	54	-25.09	-	-	360	101	H
			* 1.293601	61.95	PK-U	28.5	-49.56	0	40.89	-	-	74	-33.11	360	199	V
			* 1.290653	50.07	ADR	28.5	-49.57	0	29	54	-25	-	-	360	199	V
			* 2.898932	59.77	PK-U	32.5	-48.41	0	43.86	-	-	74	-30.14	360	101	V
			* 2.89647	47.64	ADR	32.5	-48.5	0	31.64	54	-22.36	-	-	360	101	V
			2.954059	58.79	PK-U	32.6	-48.2	0	43.19	-	-	68.2	-25.01	360	101	H
			12.849877	53.93	PK-U	39.3	-43.5	0	49.73	-	-	68.2	-18.47	360	200	H
			12.882592	54.74	PK-U	39.3	-43.6	0	50.44	-	-	68.2	-17.76	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

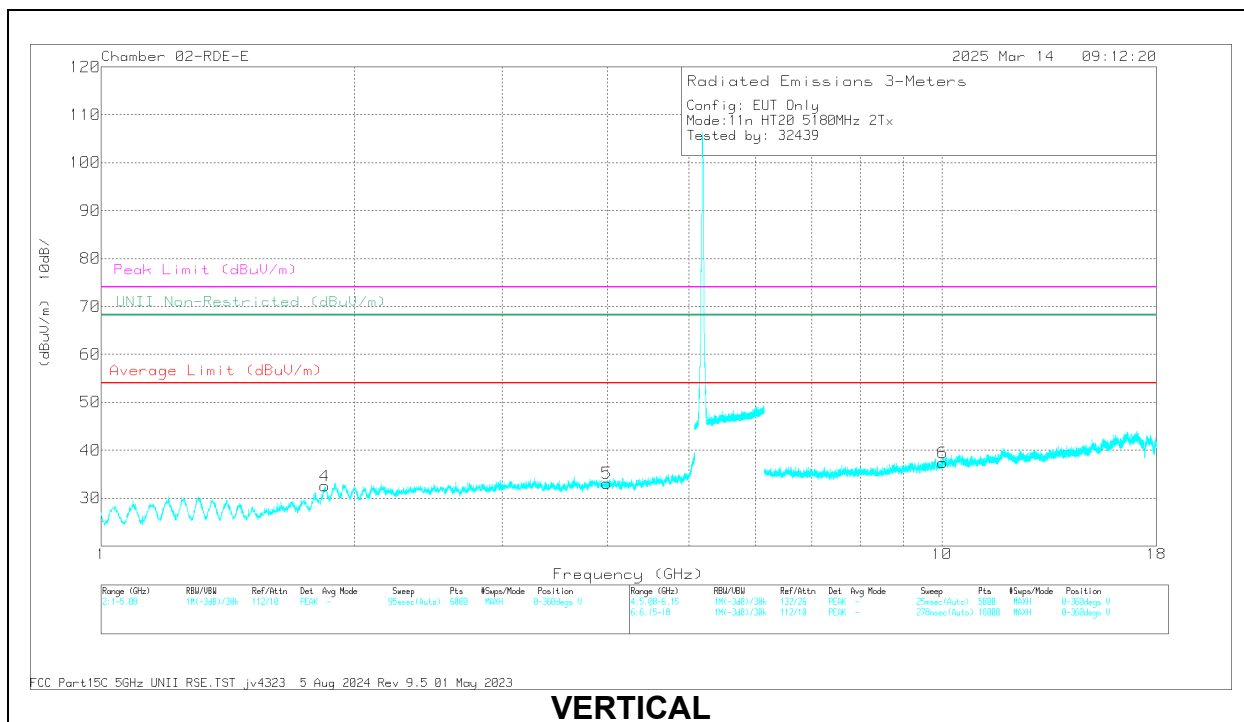
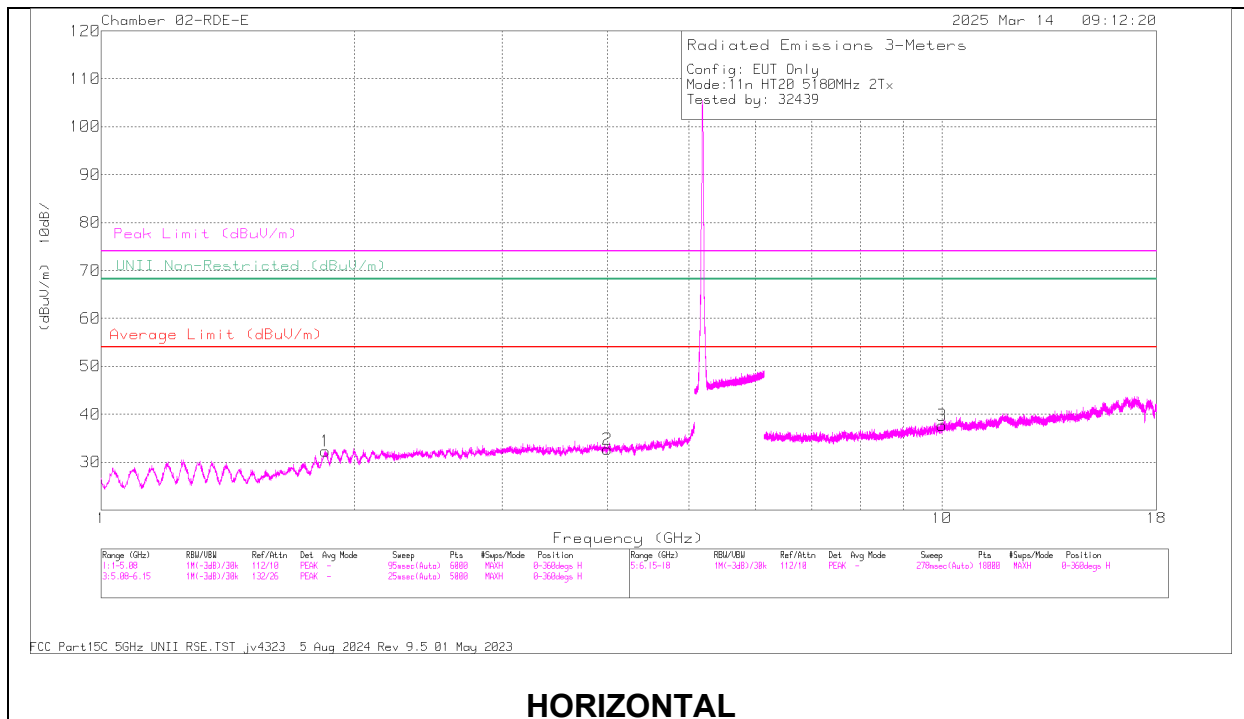
160MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5250 (Straddle)	6 + 5	* 15.750704	54.35	PK-U	40.7	-42.63	0	52.42	-	-	74	-21.58	153	181	H
			* 15.748261	42.61	ADR	40.7	-42.6	0	40.71	54	-13.29	-	-	153	181	H
			* 15.752327	54.41	PK-U	40.7	-42.6	0	52.51	-	-	74	-21.49	118	201	V
			* 15.75192	42.6	ADR	40.7	-42.6	0	40.7	54	-13.3	-	-	118	201	V
			3.234603	57.89	PK-U	32.8	-47.34	0	43.35	-	-	68.2	-24.85	38	148	V
			3.236325	58.23	PK-U	32.8	-47.4	0	43.63	-	-	68.2	-24.57	238	372	H
			10.501945	55.74	PK-U	37.6	-45.2	0	48.14	-	-	68.2	-20.06	56	231	V
			10.504537	55.85	PK-U	37.6	-45.05	0	48.4	-	-	68.2	-19.8	153	233	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5180MHz)**LOW CHANNEL RESULTS**

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 4.002081	55.47	PK-U	33.5	0	-46.01	42.96	-	-	74	-31.04	317	159	H
2	* 4.004311	44.05	ADR	33.5	0	-46.06	31.49	54	-22.51	-	-	317	159	H
5	* 3.991577	55.71	PK-U	33.5	0	-46.02	43.19	-	-	74	-30.81	143	141	V
5	* 3.992251	44.05	ADR	33.5	0	-46.04	31.51	54	-22.49	-	-	143	141	V
4	1.843313	60.7	PK-U	30.7	0	-49.4	42	-	-	68.2	-26.2	227	216	V
1	1.843755	60.86	PK-U	30.7	0	-49.39	42.17	-	-	68.2	-26.03	253	299	H
3	10.010352	55.38	PK-U	37.2	0	-45.83	46.75	-	-	68.2	-21.45	26	236	H
6	10.017307	55.71	PK-U	37.2	0	-46.01	46.9	-	-	68.2	-21.3	291	230	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

10.1.8. 802.11be MIMO MODE IN UNII-1 BAND – SPURIOUS EMISSIONS

20MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cb/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5180	6 + 5	* 1.272649	49.26	ADR	28.9	-48.9	0	29.26	54	-24.74	-	-	0	101	V
			* 1.274462	60.63	PK-U	28.9	-48.8	0	40.73	-	-	74	-33.27	0	101	V
			* 13.35213	40.5	ADR	38.9	-38.8	0	40.6	54	-13.4	-	-	0	101	V
			* 13.36269	52.62	PK-U	38.9	-38.9	0	52.62	-	-	74	-21.38	0	101	V
			* 1.384795	49.26	ADR	28.5	-48.8	0	28.96	54	-25.04	-	-	0	101	H
			* 1.390555	60.75	PK-U	28.5	-48.8	0	40.45	-	-	74	-33.55	0	101	H
			* 15.586442	40.59	ADR	39.9	-38.5	0	41.99	54	-12.01	-	-	0	101	H
			* 15.590864	52.13	PK-U	39.9	-38.6	0	53.43	-	-	74	-20.57	0	101	H
			10.365135	54.18	PK-U	37.3	-41.8	0	49.68	-	-	68.2	-18.52	0	200	V
			6.868497	53.96	PK-U	35.7	-43.1	0	46.56	-	-	68.2	-21.64	0	101	H
	5200	6 + 5	* 1.150604	60.65	PK-U	28.1	-49	0	39.75	-	-	74	-34.25	2	101	H
			* 1.150507	49.3	ADR	28.1	-49.1	0	28.3	54	-25.7	-	-	2	101	H
			* 1.155397	49.41	ADR	28.1	-49	0	28.51	54	-25.49	-	-	2	200	V
			* 1.155423	61.05	PK-U	28.1	-49	0	40.15	-	-	74	-33.85	2	200	V
			* 15.640055	40.62	ADR	39.9	-38.9	0	41.62	54	-12.38	-	-	2	199	V
			* 15.645561	52.57	PK-U	39.9	-38.7	0	53.77	-	-	74	-20.23	2	199	V
			13.865375	52.18	PK-U	39	-39.6	0	51.58	-	-	68.2	-16.62	2	101	V
			16.831807	51.91	PK-U	41.7	-37.8	0	55.81	-	-	68.2	-12.39	2	199	H
			* 15.704755	55.59	PK-U	40	-38.7	0	56.89	-	-	74	-17.11	0	101	H
			* 15.707141	42.44	ADR	40	-38.3	0	44.14	54	-9.86	-	-	0	101	H
	5240	6 + 5	* 12.458307	52.21	PK-U	38.9	-39.5	0	51.61	-	-	74	-22.39	0	101	H
			* 12.441547	40.89	ADR	38.9	-39.5	0	40.29	54	-13.71	-	-	0	101	H
			* 15.734.292	52.48	PK-U	40	-38.6	0	53.88	-	-	74	-20.12	0	200	V
			* 15.721532	40.63	ADR	40	-38.1	0	42.53	54	-11.47	-	-	0	200	V
			2.441056	58.66	PK-U	32.4	-47.8	0	43.26	-	-	68.2	-24.94	0	101	H
			3.209617	56.36	PK-U	33	-45.4	0	43.96	-	-	68.2	-24.24	0	101	V
			16.990215	51.66	PK-U	41.6	-37.8	0	55.46	-	-	68.2	-12.74	0	101	V
	5180 (Low Index)	6 + 5	* 4.068487	57.14	PK-U	33.4	-46.43	0	44.11	-	-	74	-29.89	193	354	H
			* 4.069455	45.43	ADR	33.4	-46.43	0	32.4	54	-21.6	-	-	193	354	H
			* 4.069708	57.34	PK-U	33.4	-46.42	0	44.32	-	-	74	-29.68	193	100	V
			* 4.069773	45.49	ADR	33.4	-46.42	0	32.47	54	-21.53	-	-	193	100	V
			10.352541	55.92	PK-U	37.5	-44.5	0	48.92	-	-	68.2	-19.28	215	260	H
			10.359095	55.71	PK-U	37.5	-44.43	0	48.78	-	-	68.2	-19.42	334	283	V
			* 15.537589	55.34	PK-U	40.7	-42.94	0	53.1	-	-	74	-20.9	288	181	H
			* 15.536398	43.78	ADR	40.7	-42.94	0	41.54	54	-12.46	-	-	288	181	H
			* 15.55838	56.12	PK-U	40.8	-42.86	0	54.06	-	-	74	-19.94	164	209	V
			* 15.55955	44.21	ADR	40.8	-42.88	0	42.13	54	-11.87	-	-	164	209	V
	5200 (Mid Index)	6 + 5	* 1.687095	59.98	PK-U	29.3	-48.18	0	41.1	-	-	74	-32.9	91	273	H
			* 1.686771	47.42	ADR	29.3	-48.18	0	28.54	54	-25.46	-	-	91	273	H
			* 1.686874	59.2	PK-U	29.3	-48.18	0	40.32	-	-	74	-33.68	139	199	V
			* 1.685273	47.32	ADR	29.2	-48.17	0	28.35	54	-25.65	-	-	139	199	V
			10.477203	57.64	PK-U	37.5	-44.86	0	50.28	-	-	68.2	-17.92	271	356	H
			10.48028	56.4	PK-U	37.6	-44.9	0	49.1	-	-	68.2	-19.1	254	268	V
			* 15.606956	55.08	PK-U	41	-42.48	0	53.6	-	-	74	-20.4	151	234	H
			* 15.6079	43.85	ADR	41	-42.43	0	42.42	54	-11.58	-	-	151	234	H
			* 15.610039	55.12	PK-U	41	-42.34	0	53.78	-	-	74	-20.22	215	184	V
			* 15.608621	43.52	ADR	41	-42.41	0	42.11	54	-11.89	-	-	215	184	V
	5240 (High Index)	6 + 5	* 2.792264	58	PK-U	32.3	-47.34	0	42.96	-	-	74	-31.04	208	100	H
			* 2.791512	46.65	ADR	32.3	-47.38	0	31.57	54	-22.43	-	-	208	100	H
			* 2.793426	58.35	PK-U	32.3	-47.31	0	43.34	-	-	74	-30.66	190	211	V
			* 2.790912	46.69	ADR	32.3	-47.41	0	31.58	54	-22.42	-	-	190	211	V
			* 8.285501	55.37	PK-U	36	-44.24	0	47.13	-	-	74	-26.87	306	258	H
			* 8.28748	43.71	ADR	36	-44.31	0	35.4	54	-18.6	-	-	306	258	H
			* 8.295015	55.25	PK-U	36	-44.52	0	46.73	-	-	74	-27.27	341	209	V
			* 8.294665	43.68	ADR	36	-44.51	0	35.17	54	-18.83	-	-	341	209	V
			* 10.940679	56.64	PK-U	37.7	-44.9	0	49.44	-	-	74	-24.56	69	294	H
			* 10.939765	44.92	ADR	37.7	-44.94	0	37.68	54	-16.32	-	-	69	294	H
			* 10.941871	56.75	PK-U	37.7	-44.86	0	49.59	-	-	74	-24.41	102	218	V
			* 10.94287	44.77	ADR	37.7	-44.79	0	37.68	54	-16.32	-	-	102	218	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cb/ Filt/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5190	6 + 5	* 1.32285	60.71	PK-U	29.3	-47.8	0	42.21	-	-	74	-31.79	244	189	H
			* 1.322561	49.07	ADR	29.3	-47.8	0	30.57	54	-23.43	-	-	244	189	H
			* 1.324465	60.73	PK-U	29.3	-47.8	0	42.23	-	-	74	-31.77	112	243	V
			* 1.32238	48.87	ADR	29.3	-47.8	0	30.37	54	-23.63	-	-	112	243	V
			* 8.305769	55.88	PK-U	35.9	-44	0	47.78	54	-	74	-26.22	330	254	H
			* 8.306843	43.92	ADR	35.9	-44.08	0	35.74	54	-18.26	-	-	330	254	H
			* 11.91148	55.04	PK-U	38.8	-42.28	0	51.56	-	-	74	-22.44	207	151	H
			* 11.917434	43.48	ADR	38.8	-42.24	0	40.04	54	-13.96	-	-	207	151	H
			* 8.325608	55.33	PK-U	35.9	-44	0	47.23	-	-	74	-26.77	15	339	V
			* 8.328295	43.83	ADR	35.9	-44	0	35.73	54	-18.27	-	-	15	339	V
			* 11.901955	55.34	PK-U	38.7	-42.4	0	51.64	-	-	74	-22.36	134	153	V
			* 11.89944	43.52	ADR	38.7	-42.4	0	39.82	54	-14.18	-	-	134	153	V
	5230	6 + 5	* 1.323866	60.82	PK-U	29.3	-47.8	0	42.32	-	-	74	-31.68	178	208	H
			* 1.323489	49.08	ADR	29.3	-47.8	0	30.58	54	-23.42	-	-	178	208	H
			* 1.322355	61.52	PK-U	29.3	-47.8	0	43.02	-	-	74	-30.98	37	379	V
			* 1.324819	49.17	ADR	29.3	-47.8	0	30.67	54	-23.33	-	-	37	379	V
			* 8.059311	54.33	PK-U	35.8	-43.6	0	46.53	-	-	74	-27.47	173	247	H
			* 8.060678	42.76	ADR	35.8	-43.6	0	34.96	54	-19.04	-	-	173	247	H
			* 11.903198	55.3	PK-U	38.7	-42.3	0	51.7	-	-	74	-22.3	124	180	H
			* 11.904173	43.68	ADR	38.7	-42.3	0	40.08	54	-13.92	-	-	124	180	H
			* 8.065725	55.39	PK-U	35.8	-43.5	0	47.69	-	-	74	-26.31	343	241	V
			* 8.067345	43.68	ADR	35.8	-43.53	0	35.95	54	-18.05	-	-	343	241	V
			* 11.912403	55.41	PK-U	38.7	-42.2	0	51.91	-	-	74	-22.09	6	169	V
			* 11.910898	43.53	ADR	38.7	-42.2	0	40.03	54	-13.97	-	-	6	169	V
11be (Partial RU 242 / Highest PSD)	5190	6 + 5	2.400807	58.74	PK-U	32	-47.84	0	42.9	-	-	68.2	-25.3	225	137	H
			3.211395	57.78	PK-U	32.9	-46.64	0	44.04	-	-	68.2	-24.16	246	171	V
			* 10.850798	55.56	PK-U	37.7	-44.44	0	48.82	-	-	74	-25.18	343	274	H
			* 10.851762	44.33	ADR	37.7	-44.45	0	37.58	54	-16.42	-	-	343	274	H
			* 10.844274	55.64	PK-U	37.7	-44.44	0	48.9	-	-	74	-25.1	281	136	V
			* 10.845886	44.11	ADR	37.7	-44.4	0	37.41	54	-16.59	-	-	281	136	V
			* 15.584046	55.32	PK-U	40.9	-42.77	0	53.45	-	-	74	-20.55	238	143	H
			* 15.584298	43.63	ADR	40.9	-42.77	0	41.76	54	-12.24	-	-	238	143	H
			* 15.589643	54.99	PK-U	40.8	-42.76	0	53.03	-	-	74	-20.97	207	118	V
			* 15.587521	43.46	ADR	40.8	-42.76	0	41.5	54	-12.5	-	-	207	118	V
			* 1.373406	59.51	PK-U	28.5	-47.64	0	40.37	-	-	74	-33.63	70	110	H
			* 1.373724	47.77	ADR	28.5	-47.65	0	28.62	54	-25.38	-	-	70	110	H
	5230	6 + 5	* 1.369745	59.23	PK-U	28.6	-47.64	0	40.19	-	-	74	-33.81	117	149	V
			* 1.369643	47.57	ADR	28.6	-47.64	0	28.53	54	-25.47	-	-	117	149	V
			* 7.372739	55.7	PK-U	35.6	-44.67	0	46.63	-	-	74	-27.37	173	209	H
			* 7.371493	44.04	ADR	35.6	-44.62	0	35.02	54	-18.98	-	-	173	209	H
			* 7.374441	56.08	PK-U	35.6	-44.74	0	46.94	-	-	74	-27.06	220	318	V
			* 7.372623	44.22	ADR	35.6	-44.67	0	35.15	54	-18.85	-	-	220	318	V
			* 15.610541	55.23	PK-U	40.9	-42.33	0	53.8	-	-	74	-20.2	260	251	H
			* 15.610976	43.41	ADR	40.9	-42.32	0	41.99	54	-12.01	-	-	260	251	H
			* 15.60705	55.23	PK-U	41	-42.48	0	53.75	-	-	74	-20.25	201	316	V
			* 15.607828	43.81	ADR	41	-42.43	0	42.38	54	-11.62	-	-	201	316	V
	5190	6 + 5	* 3.620429	56.91	PK-U	33.1	-46.46	0	43.55	-	-	74	-30.45	12	244	H
			* 3.619963	45.16	ADR	33.1	-46.49	0	31.77	54	-22.23	-	-	12	244	H
			* 3.617183	57.26	PK-U	33.1	-46.56	0	43.8	-	-	74	-30.2	309	140	V
			* 3.61563	45.27	ADR	33.1	-46.59	0	31.78	54	-22.22	-	-	309	140	V
			10.370332	56.02	PK-U	37.5	-44.58	0	48.94	-	-	68.2	-19.26	271	208	H
			10.36331	55.39	PK-U	37.5	-44.59	0	48.3	-	-	68.2	-19.9	336	280	V
			* 15.598658	55.33	PK-U	40.9	-42.58	0	53.65	-	-	74	-20.35	200	386	H
			* 15.599858	44.06	ADR	40.9	-42.55	0	42.41	54	-11.59	-	-	200	386	H
			* 15.611016	55.57	PK-U	40.9	-42.32	0	54.15	-	-	74	-19.85	3	374	V
			* 15.609551	44.18	ADR	41	-42.37	0	42.81	54	-11.19	-	-	3	374	V
11be (Partial MRU 52+26 / Highest PSD)	5230	6 + 5	1.818191	60.54	PK-U	30.6	-48.27	0	42.87	-	-	68.2	-25.33	175	338	H
			1.815537	60.19	PK-U	30.6	-48.3	0	42.49	-	-	68.2	-25.71	242	273	V
			* 10.997954	57.02	PK-U	37.7	-44.79	0	49.93	-	-	74	-24.07	28	391	H
			* 10.996064	44.92	ADR	37.7	-44.78	0	37.84	54	-16.16	-	-	28	391	H
			* 10.991622	56.24	PK-U	37.7	-44.73	0	49.21	-	-	74	-24.79	210	240	V
			* 10.992501	44.69	ADR	37.7	-44.68	0	37.71	54	-16.29	-	-	210	240	V
			* 15.678522	54.81	PK-U	41	-42.19	0	53.62	-	-	74	-20.38	101	227	H
			* 15.676056	43.34	ADR	41	-42.14	0	42.2	54	-11.8	-	-	101	227	H
			* 15.711639	55.58	PK-U	41	-42.75	0	53.83	-	-	74	-20.17	73	255	V
			* 15.713838	43.74	ADR	41	-42.77	0	41.97	54	-12.03	-	-	73	255	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbl/ Ftr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5210	6 + 5	* 1.229806	61.81	PK-U	28.5	0	-49.8	40.51	-	-	74	-33.49	360	101	H
			* 1.229586	50.05	ADR	28.5	0	-49.8	28.75	54	-25.25	-	-	360	101	H
			* 1.288691	61.78	PK-U	28.5	0	-49.5	40.78	-	-	74	-33.22	360	200	V
			* 1.290106	50.27	ADR	28.5	0	-49.51	29.26	54	-24.74	-	-	360	200	V
			* 2.849988	59.38	PK-U	32.5	0	-48.7	43.18	-	-	74	-30.82	360	101	V
			* 2.851656	47.5	ADR	32.5	0	-48.7	31.3	54	-22.7	-	-	360	101	V
			* 10.89916	55.16	PK-U	37.8	0	-44.8	48.16	-	-	74	-25.84	360	101	H
			* 10.89954	43.86	ADR	37.8	0	-44.8	36.86	54	-17.14	-	-	360	101	H
			* 12.047708	54.59	PK-U	38.8	0	-43.63	49.76	-	-	74	-24.24	360	200	V
			* 12.050546	42.71	ADR	38.8	0	-43.6	37.91	54	-16.09	-	-	360	200	V
11be (RU 242 / Highest PSD)	5210 (Low Index)	6 + 5	2.408378	60.66	PK-U	32.2	0	-49.4	43.46	-	-	68.2	-24.74	360	101	H
			* 1.675993	59.67	PK-U	29	0	-48.18	40.49	-	-	74	-33.51	220	195	H
			* 1.677771	47.67	ADR	29.1	0	-48.21	28.56	54	-25.44	-	-	220	195	H
			* 1.676554	58.99	PK-U	29.1	0	-48.19	39.9	-	-	74	-34.1	324	138	V
			* 1.675659	47.62	ADR	29	0	-48.18	28.44	54	-25.56	-	-	324	138	V
			10.28907	55.25	PK-U	37.5	0	-44.07	48.68	-	-	68.2	-19.52	358	102	H
			10.3068	55.52	PK-U	37.5	0	-44.07	48.95	-	-	68.2	-19.25	185	241	V
			* 15.852661	56.04	PK-U	41	0	-42.58	54.46	-	-	74	-19.54	228	133	H
			* 15.855337	44.21	ADR	41	0	-42.49	42.72	54	-11.28	-	-	228	133	H
			* 15.870196	55.82	PK-U	41.1	0	-42.39	54.53	-	-	74	-19.47	67	169	V
11be (RU 52 / Highest PSD)	5210 (Low Index)	6 + 5	* 15.869263	43.93	ADR	41.1	0	-42.39	42.64	54	-11.36	-	-	67	169	V
			* 4.071897	56.97	PK-U	33.4	0	-46.44	43.93	-	-	74	-30.07	125	349	H
			* 4.073899	45.29	ADR	33.4	0	-46.41	32.28	54	-21.72	-	-	125	349	H
			* 4.07116	56.55	PK-U	33.4	0	-46.41	43.54	-	-	74	-30.46	265	123	V
			* 4.07123	44.86	ADR	33.4	0	-46.41	31.85	54	-22.15	-	-	265	123	V
			10.34261	56.23	PK-U	37.5	0	-44.36	49.37	-	-	68.2	-18.83	162	201	H
			10.339881	55.41	PK-U	37.5	0	-44.44	48.47	-	-	68.2	-19.73	130	300	V
			* 15.613767	54.67	PK-U	40.9	0	-42.25	53.32	-	-	74	-20.68	287	116	H
			* 15.614268	43.24	ADR	40.9	0	-42.25	41.89	54	-12.11	-	-	287	116	H
			* 15.632293	55.21	PK-U	41	0	-42.18	54.03	-	-	74	-19.97	24	180	V
			* 15.632097	43.51	ADR	41	0	-42.17	42.34	54	-11.66	-	-	24	180	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

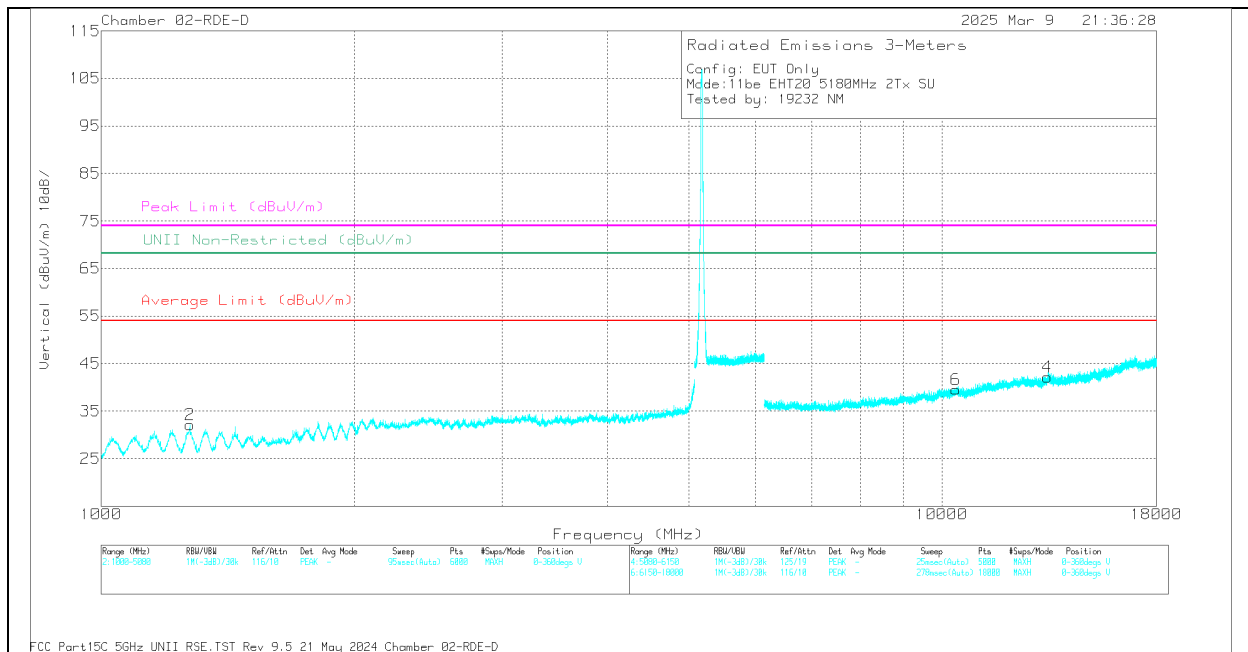
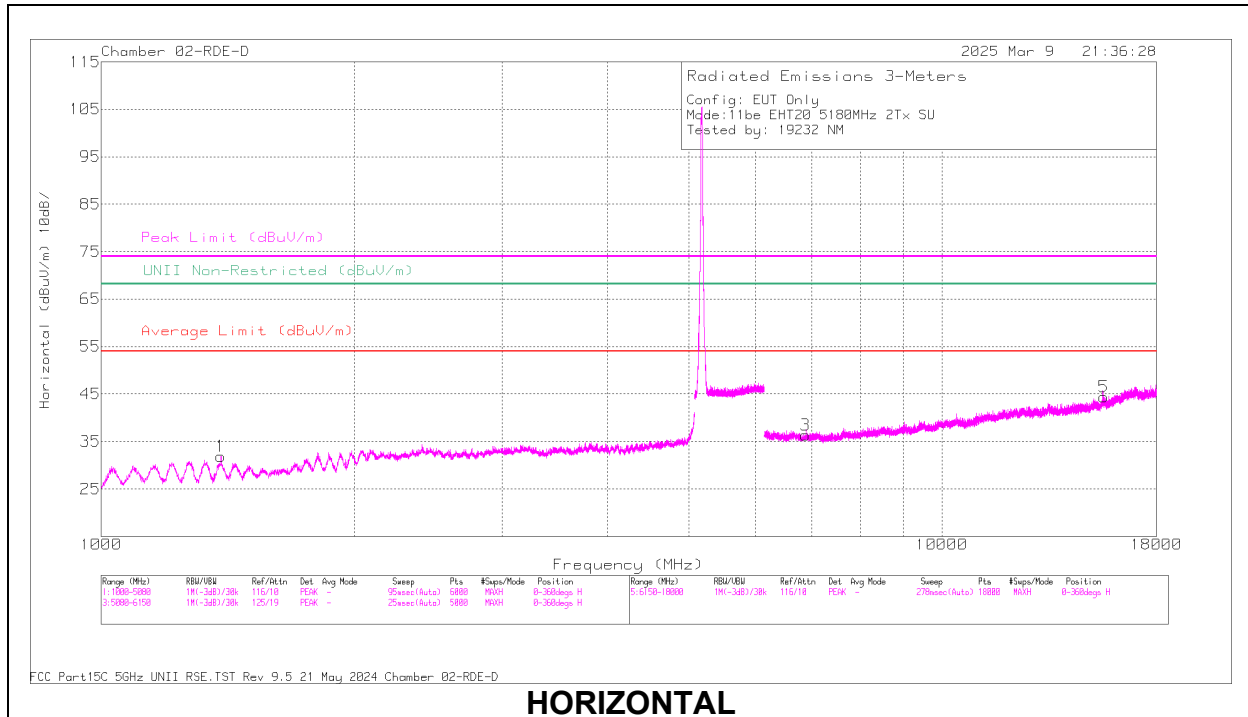
160MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5250 (Straddle)	6 + 5	3.105557	58.17	PK-U	32.9	0	-47.9	43.17	-	-	68.2	-25.03	241	171	V
			3.109924	58.16	PK-U	32.9	0	-47.99	43.07	-	-	68.2	-25.13	92	276	H
			10.500421	56.11	PK-U	37.6	0	-45.2	48.51	-	-	68.2	-19.69	229	169	H
			10.500953	55.99	PK-U	37.6	0	-45.2	48.39	-	-	68.2	-19.81	329	143	V
			14.748855	54.86	PK-U	39.4	0	-43.61	50.65	-	-	68.2	-17.55	351	168	V
			14.749196	54.33	PK-U	39.4	0	-43.58	50.15	-	-	68.2	-18.05	306	166	H
11be (RU 242 / Highest PSD)	5250 (Straddle) (High Index)	6 + 5	1.887321	56.34	PK-U	30.7	0	-46.2	40.84	-	-	68.2	-27.36	43	205	H
			1.883663	44.71	ADR	30.7	0	-46.3	29.11	-	-	-	-	43	205	H
			3.26376	55.7	PK-U	32.9	0	-45.2	43.4	-	-	74	-30.6	264	170	H
			3.262348	43.85	ADR	32.9	0	-45.27	31.48	54	-22.52	-	-	264	170	H
			1.882092	55.98	PK-U	30.7	0	-46.3	40.38	-	-	68.2	-27.82	258	399	V
			1.881932	44.46	ADR	30.7	0	-46.3	28.86	-	-	-	-	258	399	V
			3.263863	55.52	PK-U	32.9	0	-45.2	43.22	-	-	74	-30.78	53	181	V
			3.262802	43.91	ADR	32.9	0	-45.22	31.59	54	-22.41	-	-	53	181	V
			10.554808	53.58	PK-U	38	0	-42.52	49.06	-	-	68.2	-19.14	53	200	H
			10.557071	42.06	ADR	38	0	-42.59	37.47	-	-	-	-	53	200	H
			10.552338	53.41	PK-U	38	0	-42.57	48.84	-	-	68.2	-19.36	53	200	V
			10.550476	41.98	ADR	38	0	-42.5	37.48	-	-	-	-	53	200	V
11be (RU 52 / Highest PSD)	5250 (Straddle) (Low Index)	6 + 5	1.71209	56.24	PK-U	29.4	0	-46.39	39.25	-	-	68.2	-28.95	216	392	H
			3.453266	55	PK-U	32.8	0	-45	42.8	-	-	68.2	-25.4	212	123	H
			* 1.680704	56.95	PK-U	29	0	-46.37	39.58	-	-	74	-34.42	167	397	V
			* 1.689563	45.49	ADR	29.1	0	-46.44	28.15	54	-25.85	-	-	167	397	V
			3.45358	54.63	PK-U	32.8	0	-45	42.43	-	-	68.2	-25.77	276	148	V
			* 10.77424	53.15	PK-U	37.9	0	-42.8	48.25	-	-	74	-25.75	276	101	H
			* 10.772546	41.82	ADR	37.9	0	-42.85	36.87	54	-17.13	-	-	276	101	H
			* 10.77146	53.58	PK-U	37.9	0	-42.8	48.68	-	-	74	-25.32	276	200	V
			* 10.771426	41.58	ADR	37.9	0	-42.8	36.68	54	-17.32	-	-	276	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5180MHz)**LOW CHANNEL RESULTS**

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	200896 ACF(dB/m)	Amp/Cbl/Fitr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 1.272649	49.26	ADR	28.9	-48.9	0	29.26	54	-24.74	-	-	0	101	V
2	* 1.274462	60.63	PK-U	28.9	-48.8	0	40.73	-	-	74	-33.27	0	101	V
4	* 13.35213	40.5	ADR	38.9	-38.8	0	40.6	54	--13.4	-	-	0	101	V
4	* 13.36269	52.62	PK-U	38.9	-38.9	0	52.62	-	-	74	-21.38	0	101	V
1	* 1.384795	49.26	ADR	28.5	-48.8	0	28.96	54	-25.04	-	-	0	101	H
1	* 1.390555	60.75	PK-U	28.5	-48.8	0	40.45	-	-	74	-33.55	0	101	H
5	* 15.586442	40.59	ADR	39.9	-38.5	0	41.99	54	-12.01	-	-	0	101	H
5	* 15.590864	52.13	PK-U	39.9	-38.6	0	53.43	-	-	74	-20.57	0	101	H
6	10.365135	54.18	PK-U	37.3	-41.8	0	49.68	-	-	68.2	-18.52	0	200	V
3	6.868497	53.96	PK-U	35.7	-43.1	0	46.56	-	-	68.2	-21.64	0	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

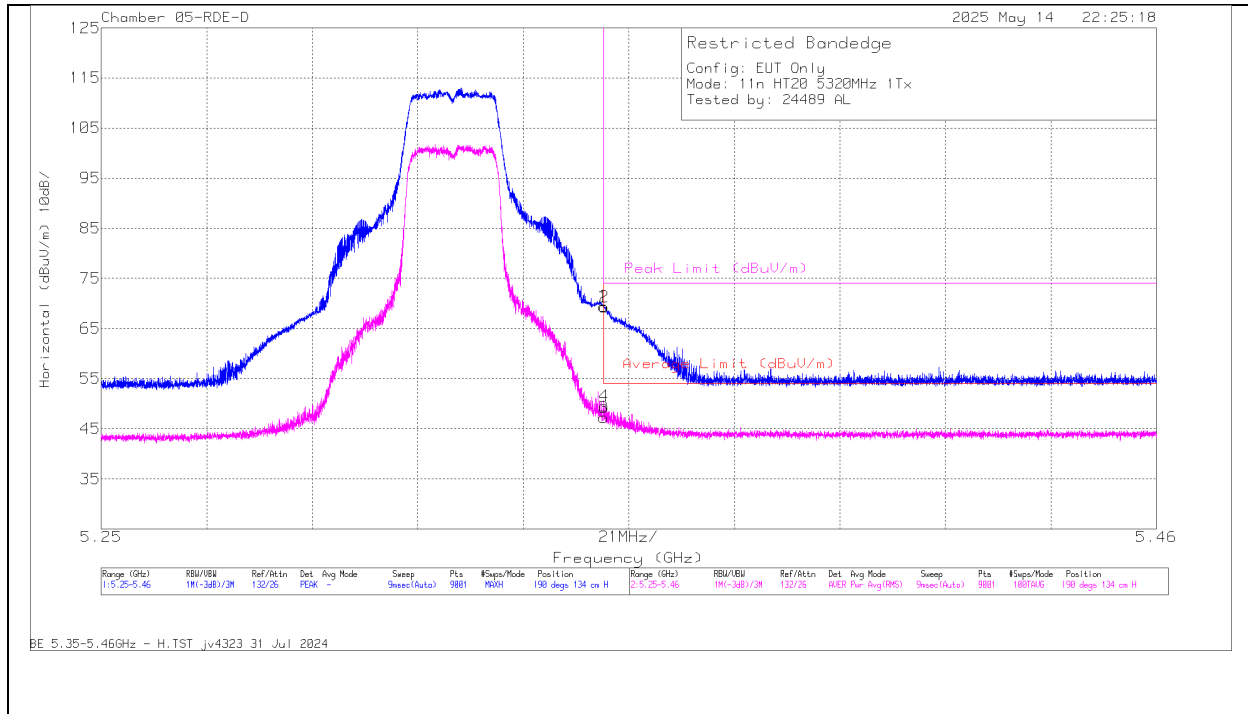
10.1.9. 802.11n/ac SISO MODE IN UNII-2A BAND – BANDEDGE

UNII-2a (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5320	6	* 5.35	73.95	Pk	34.5	-39.05	0	69.4	-	-	74	-4.6	190	134	H
			* 5.35	51.31	RMS	34.5	-39.05	0	46.76	54	-7.24	-	-	190	134	H
			* 5.350122	53.65	RMS	34.5	-39.05	0	49.1	54	-4.9	-	-	190	134	H
			* 5.350169	73.86	Pk	34.5	-39.04	0	69.32	-	-	74	-4.68	190	134	H
			* 5.35	68.12	Pk	34.5	-39.05	0	63.57	-	-	74	-10.43	190	157	V
			* 5.35	49.37	RMS	34.5	-39.05	0	44.82	54	-9.18	-	-	190	157	V
		5	* 5.350052	50.49	RMS	34.5	-39.05	0	45.94	54	-8.06	-	-	190	157	V
			* 5.350169	68.26	Pk	34.5	-39.04	0	63.72	-	-	74	-10.28	190	157	V
			* 5.35	73.1	Pk	34.5	-39.05	0	68.55	-	-	74	-5.45	233	110	H
			* 5.35	52.48	RMS	34.5	-39.05	0	47.93	54	-6.07	-	-	233	110	H
			* 5.350052	73.19	Pk	34.5	-39.05	0	68.64	-	-	74	-5.36	233	110	H
			* 5.350052	54.03	RMS	34.5	-39.05	0	49.48	54	-4.52	-	-	233	110	H
			* 5.35	67.5	Pk	34.5	-39.05	0	62.95	-	-	74	-11.05	118	261	V
			* 5.35	51.2	RMS	34.5	-39.05	0	46.65	54	-7.35	-	-	118	261	V
			* 5.350099	68.48	Pk	34.5	-39.05	0	63.93	-	-	74	-10.07	118	261	V
			* 5.350262	51.6	RMS	34.5	-39.04	0	47.06	54	-6.94	-	-	118	261	V
HT40	5310	6	* 5.35	72.43	Pk	34.6	-39.12	0	67.91	-	-	74	-6.09	250	171	H
			* 5.35	53.31	RMS	34.6	-39.12	0	48.79	54	-5.21	-	-	250	171	H
			* 5.350145	73.42	Pk	34.6	-39.13	0	68.89	-	-	74	-5.11	250	171	H
			* 5.352432	54.63	RMS	34.6	-39.18	0	50.05	54	-3.95	-	-	250	171	H
			* 5.35	63.3	Pk	34.6	-39.12	0	58.78	-	-	74	-15.22	259	266	V
			* 5.35	48.8	RMS	34.6	-39.12	0	44.28	54	-9.72	-	-	259	266	V
		5	* 5.353435	65.21	Pk	34.6	-39.18	0	60.63	-	-	74	-13.37	259	266	V
			* 5.357588	49.27	RMS	34.6	-39.14	0	44.73	54	-9.27	-	-	259	266	V
			* 5.35	72.46	Pk	34.5	-39.05	0	67.91	-	-	74	-6.09	231	105	H
			* 5.35	53.48	RMS	34.5	-39.05	0	48.93	54	-5.07	-	-	231	105	H
			* 5.350052	73.55	Pk	34.5	-39.05	0	69	-	-	74	-5	231	105	H
			* 5.350052	54.89	RMS	34.5	-39.05	0	50.34	54	-3.66	-	-	231	105	H
			* 5.35	65.42	Pk	34.5	-39.05	0	60.87	-	-	74	-13.13	115	357	V
			* 5.35	48.28	RMS	34.5	-39.05	0	43.73	54	-10.27	-	-	115	357	V
			* 5.351149	66.5	Pk	34.5	-39.01	0	61.99	-	-	74	-12.01	115	357	V
			* 5.352082	49.79	RMS	34.5	-39	0	45.29	54	-8.71	-	-	115	357	V
VHT80	5290	6	* 5.35	66.72	Pk	34.4	-35.8	0	65.32	-	-	74	-8.68	110	159	H
			* 5.350892	70.38	Pk	34.4	-35.89	0	68.89	-	-	74	-5.11	110	159	H
			* 5.35	46.6	RMS	34.4	-35.8	0	45.2	54	-8.8	-	-	110	159	H
			* 5.361438	51.28	RMS	34.4	-35.8	0	49.88	54	-4.12	-	-	110	159	H
			* 5.35	56.6	Pk	34.4	-35.8	0	55.2	-	-	74	-18.8	202	140	V
			* 5.378985	60.9	Pk	34.4	-35.5	0	59.8	-	-	74	-14.2	202	140	V
		5	* 5.35	44.83	RMS	34.4	-35.8	0	43.43	54	-10.57	-	-	202	140	V
			* 5.383861	46.48	RMS	34.4	-35.5	0	45.38	54	-8.62	-	-	202	140	V
			* 5.35	67.5	Pk	34.9	-37.5	0	64.9	-	-	74	-9.1	151	175	H
			* 5.353622	70.83	Pk	34.9	-37.34	0	68.39	-	-	74	-5.61	151	175	H
			* 5.35	52.1	RMS	34.9	-37.5	0	49.5	54	-4.5	-	-	151	175	H
			* 5.355908	52.97	RMS	34.9	-37.11	0	50.76	54	-3.24	-	-	151	175	H
			* 5.35	65.31	Pk	34.9	-37.5	0	62.71	-	-	74	-11.29	109	286	V
			* 5.354065	67.01	Pk	34.9	-37.29	0	64.62	-	-	74	-9.38	109	286	V
			* 5.35	49.88	RMS	34.9	-37.5	0	47.28	54	-6.72	-	-	109	286	V
			* 5.351825	50.44	RMS	34.9	-37.4	0	47.94	54	-6.06	-	-	109	286	V
VHT160	5250 (Upper)	6	* 5.35	58.68	Pk	34.7	-37.5	0	55.88	-	-	74	-18.12	189	178	H
			* 5.399915	71.33	Pk	34.7	-37.4	0	68.63	-	-	74	-5.37	189	178	H
			* 5.35	47.19	RMS	34.7	-37.5	0.1	44.49	54	-9.51	-	-	189	178	H
			* 5.398421	50.29	RMS	34.7	-37.4	0.1	47.69	54	-6.31	-	-	189	178	H
			* 5.35	57.12	Pk	34.7	-37.5	0	54.32	-	-	74	-19.68	244	178	V
			* 5.35	46.68	RMS	34.7	-37.5	0.1	43.98	54	-10.02	-	-	244	178	V
		5	* 5.355862	47.3	RMS	34.7	-37.11	0.1	44.99	54	-9.01	-	-	244	178	V
			* 5.398165	62.4	Pk	34.7	-37.4	0	59.7	-	-	74	-14.3	244	178	V
			* 5.35	58.03	Pk	34.7	-34.84	0	57.89	-	-	74	-16.11	299	240	H
			* 5.400568	68.67	Pk	34.8	-34.79	0	68.68	-	-	74	-5.32	299	240	H
			* 5.35	46.33	RMS	34.7	-34.84	0.1	46.29	54	-7.71	-	-	299	240	H
			* 5.392331	47.7	RMS	34.8	-34.82	0.1	47.78	54	-6.22	-	-	299	240	H
			* 5.35	57.22	Pk	34.7	-34.84	0	57.08	-	-	74	-16.92	167	307	V
			* 5.400288	68.03	Pk	34.8	-34.79	0	68.04	-	-	74	-5.96	167	307	V
			* 5.35	45.63	RMS	34.7	-34.84	0.1	45.59	54	-8.41	-	-	167	307	V
			* 5.397931	48.03	RMS	34.8	-34.79	0.1	48.14	54	-5.86	-	-	167	307	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

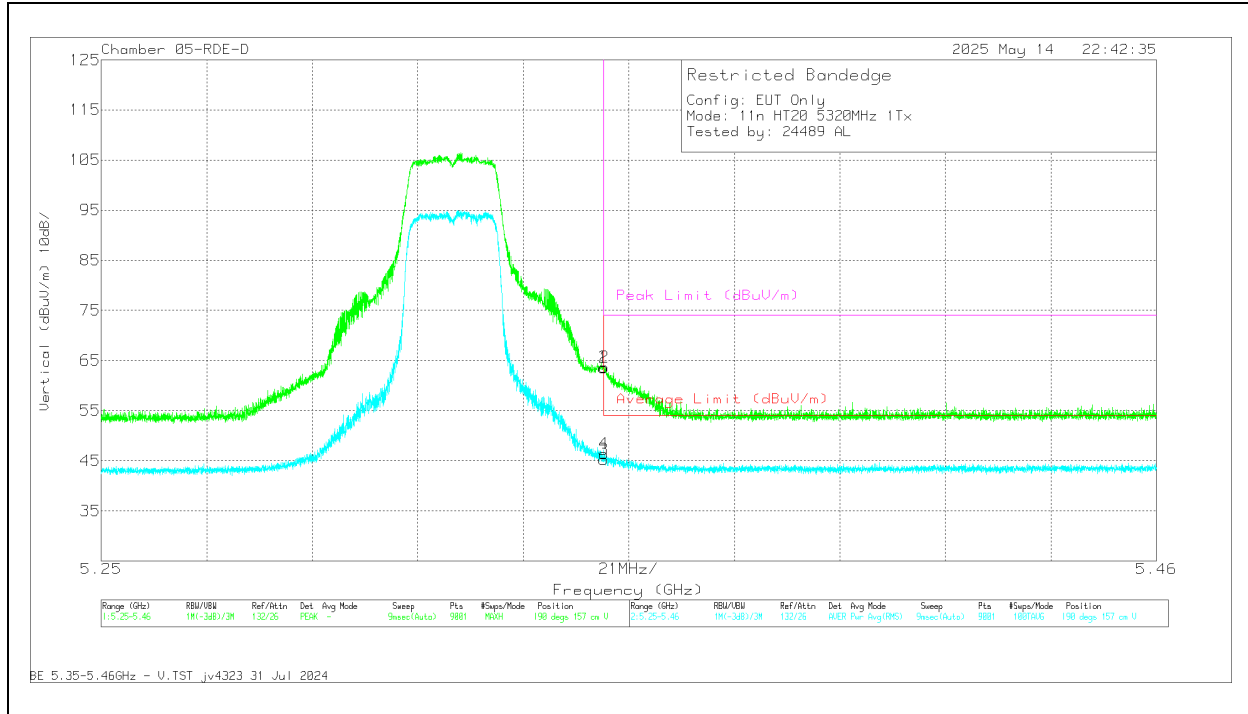
RMS - RMS detection

BANDEDGE (HIGH CHANNEL / 5320MHz)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF (dB/m)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	73.95	Pk	34.5	-39.05	0	69.4	-	-	74	-4.6	190	134	H
3	* 5.35	51.31	RMS	34.5	-39.05	0	46.76	54	-7.24	-	-	190	134	H
4	* 5.350122	53.65	RMS	34.5	-39.05	0	49.1	54	-4.9	-	-	190	134	H
2	* 5.350169	73.86	Pk	34.5	-39.04	0	69.32	-	-	74	-4.68	190	134	H

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL / 5320MHz)**VERTICAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF (dB)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	68.12	Pk	34.5	-39.05	0	63.57	-	-	74	-10.43	190	157	V
3	* 5.35	49.37	RMS	34.5	-39.05	0	44.82	54	-9.18	-	-	190	157	V
4	* 5.350052	50.49	RMS	34.5	-39.05	0	45.94	54	-8.06	-	-	190	157	V
2	* 5.350169	68.26	Pk	34.5	-39.04	0	63.72	-	-	74	-10.28	190	157	V

Pk - Peak detector

RMS - RMS detection

10.1.10. 802.11n/ac MIMO MODE IN UNII-2A BAND - BANDEDGE

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5320	6 + 5	* 5.35	72.64	Pk	34.6	-39.12	0	68.12	-	-	74	-5.88	151	181	H
			* 5.35	50.7	RMS	34.6	-39.12	0	46.18	54	-7.82	-	-	151	181	H
			* 5.350215	53.79	RMS	34.6	-39.13	0	49.26	54	-4.74	-	-	151	181	H
			* 5.350239	73.18	Pk	34.6	-39.13	0	68.65	-	-	74	-5.35	151	181	H
			* 5.35	71.7	Pk	34.6	-39.12	0	67.18	-	-	74	-6.82	215	329	V
			* 5.35	51.91	RMS	34.6	-39.12	0	47.39	54	-6.61	-	-	215	329	V
			* 5.350425	72.29	Pk	34.6	-39.15	0	67.74	-	-	74	-6.26	215	329	V
HT40	5310	6 + 5	* 5.350845	53.39	RMS	34.6	-39.17	0	48.82	54	-5.18	-	-	215	329	V
			* 5.35	71.8	Pk	34.6	-39.12	0	67.28	-	-	74	-6.72	174	215	H
			* 5.35	51.76	RMS	34.6	-39.12	0	47.24	54	-6.76	-	-	174	215	H
			* 5.352222	72.92	Pk	34.6	-39.16	0	68.36	-	-	74	-5.64	174	215	H
			* 5.353202	54.87	RMS	34.6	-39.2	0	50.27	54	-3.73	-	-	174	215	H
			* 5.35	68.27	Pk	34.6	-39.12	0	63.75	-	-	74	-10.25	236	326	V
			* 5.35	49.91	RMS	34.6	-39.12	0	45.39	54	-8.61	-	-	236	326	V
VHT80	5290	6 + 5	* 5.350239	69.1	Pk	34.6	-39.13	0	64.57	-	-	74	-9.43	236	326	V
			* 5.351709	51.62	RMS	34.6	-39.16	0	47.06	54	-6.94	-	-	236	326	V
			* 5.35	70.22	Pk	34.6	-39.12	0	65.7	-	-	74	-8.3	177	138	H
			* 5.35	50.03	RMS	34.6	-39.12	0	45.51	54	-8.49	-	-	177	138	H
			* 5.351219	73.22	Pk	34.6	-39.17	0	68.65	-	-	74	-5.35	177	138	H
			* 5.378145	54.12	RMS	34.6	-39.07	0	49.65	54	-4.35	-	-	177	138	H
			* 5.35	59.47	Pk	34.6	-39.12	0	54.95	-	-	74	-19.05	191	352	V
VHT160	5250 (Upper)	6 + 5	* 5.35	48.46	RMS	34.6	-39.12	0	43.94	54	-10.06	-	-	191	352	V
			* 5.373408	65.68	Pk	34.6	-39.05	0	61.23	-	-	74	-12.77	191	352	V
			* 5.373432	50.07	RMS	34.6	-39.05	0	45.62	54	-8.38	-	-	191	352	V
			* 5.35	57.85	Pk	34.4	-35.8	0	56.45	-	-	74	-17.55	129	279	H
			* 5.400405	70.04	Pk	34.4	-35.56	0	68.88	-	-	74	-5.12	129	279	H
			* 5.35	46.27	RMS	34.4	-35.8	0.1	44.97	54	-9.03	-	-	129	279	H
			* 5.405538	48.69	RMS	34.4	-35.55	0.1	47.64	54	-6.36	-	-	129	279	H
			* 5.35	56.35	Pk	34.4	-35.8	0	54.95	-	-	74	-19.05	146	316	V
			* 5.400265	67.8	Pk	34.4	-35.57	0	66.63	-	-	74	-7.37	146	316	V
			* 5.35	46.03	RMS	34.4	-35.8	0.1	44.73	54	-9.27	-	-	146	316	V
			* 5.401641	47.08	RMS	34.4	-35.5	0.1	46.08	54	-7.92	-	-	146	316	V

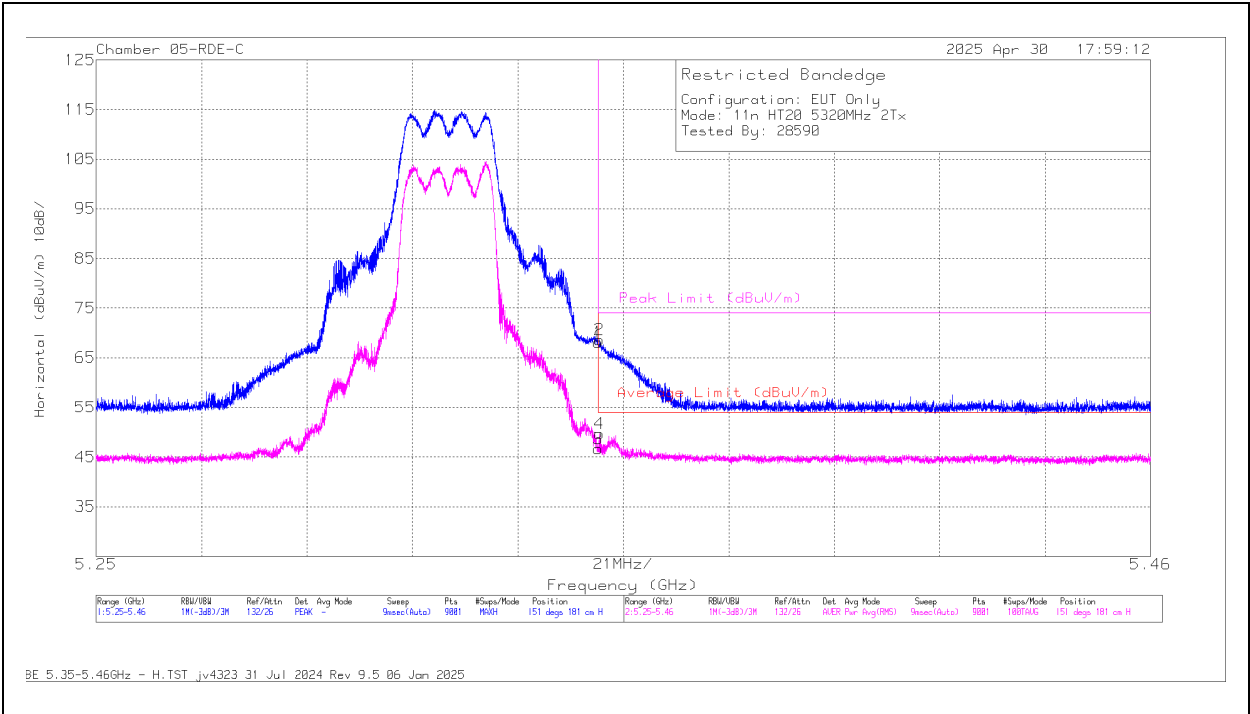
* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

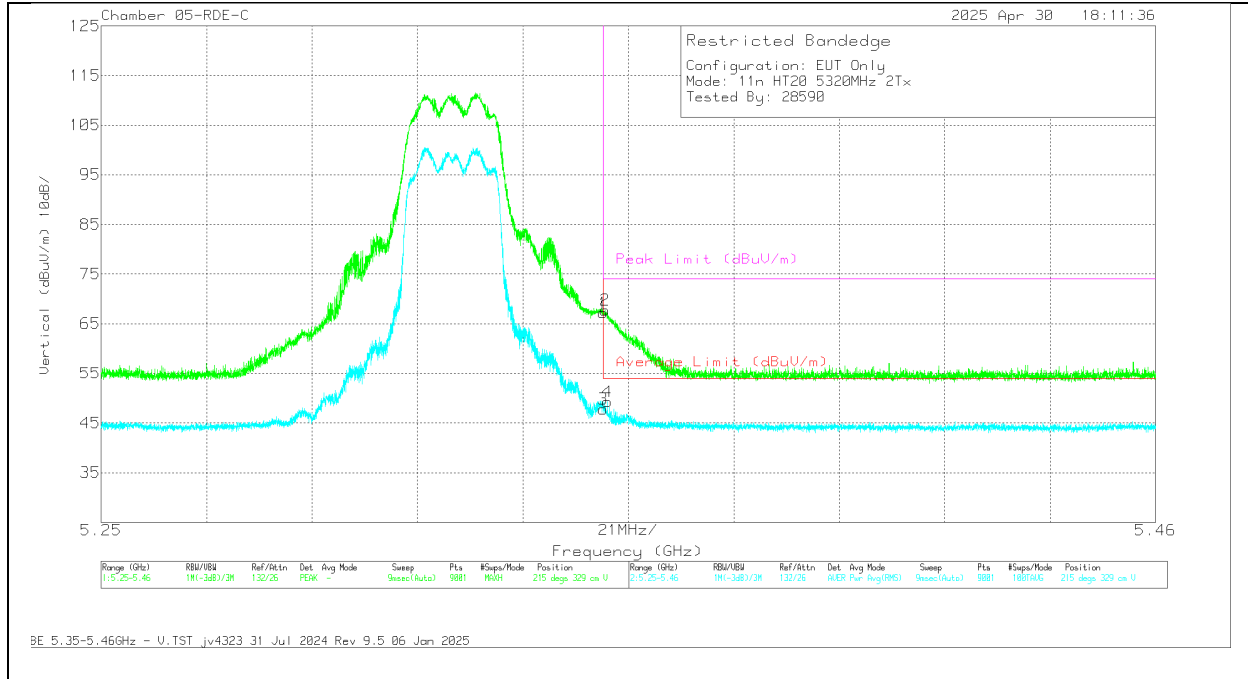
BANDEDGE (HIGH CHANNEL / 5320MHz)

HORIZONTAL RESULT



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	72.64	Pk	34.6	-39.12	0	68.12	-	-	74	-5.88	151	181	H
3	* 5.35	50.7	RMS	34.6	-39.12	0	46.18	54	-7.82	-	-	151	181	H
4	* 5.350215	53.79	RMS	34.6	-39.13	0	49.26	54	-4.74	-	-	151	181	H
2	* 5.350239	73.18	Pk	34.6	-39.13	0	68.65	-	-	74	-5.35	151	181	H

Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL / 5320MHz)**VERTICAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	71.7	Pk	34.6	-39.12	0	67.18	-	-	74	-6.82	215	329	V
3	* 5.35	51.91	RMS	34.6	-39.12	0	47.39	54	-6.61	-	-	215	329	V
2	* 5.350425	72.29	Pk	34.6	-39.15	0	67.74	-	-	74	-6.26	215	329	V
4	* 5.350845	53.39	RMS	34.6	-39.17	0	48.82	54	-5.18	-	-	215	329	V

Pk - Peak detector

RMS - RMS detection

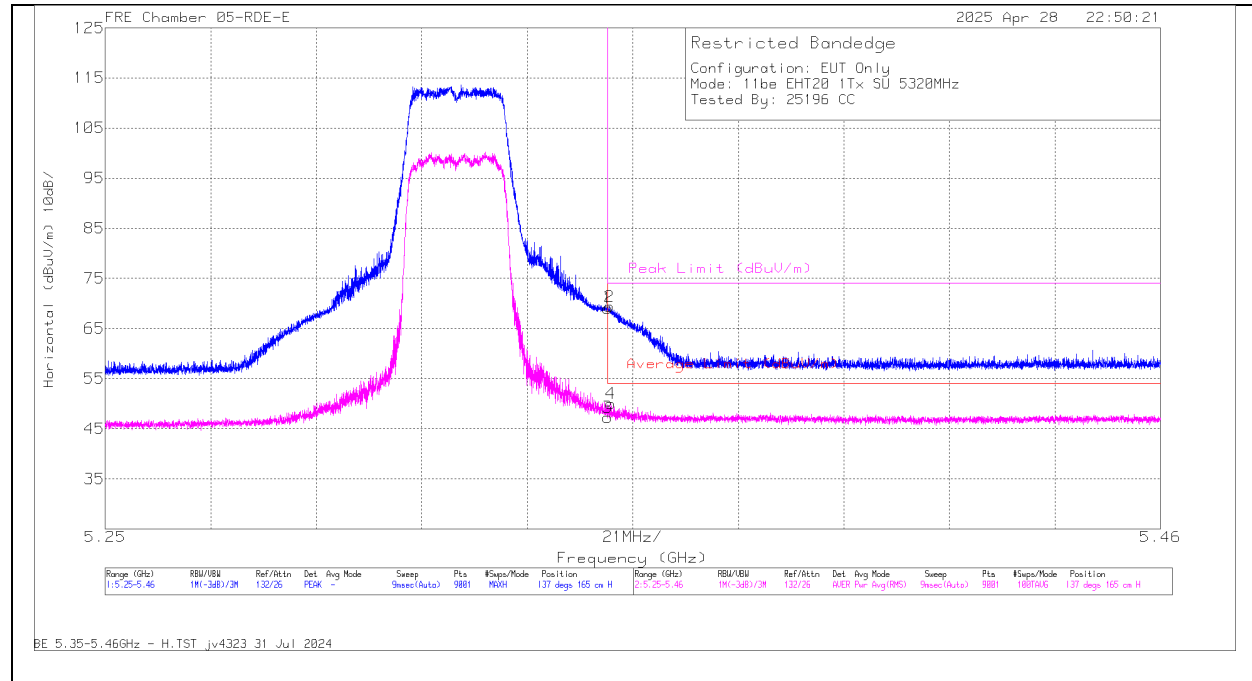
10.1.11. 802.11be SISO SU MODE IN UNII-2A BAND – BANDEDGE

UNII-2a (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	5320	6	* 5.35	67.73	Pk	34.4	-33.1	0	69.03	-	-	74	-4.97	137	165	H
			* 5.350309	68.07	Pk	34.4	-33.1	0	69.37	-	-	74	-4.63	137	165	H
			* 5.35	45.97	RMS	34.4	-33.1	0	47.27	54	-6.73	-	-	137	165	H
			* 5.350659	48.74	RMS	34.4	-33.1	0	50.04	54	-3.96	-	-	137	165	H
			* 5.35	60.29	Pk	34.4	-33.1	0	61.59	-	-	74	-12.41	144	169	V
			* 5.350402	60.86	Pk	34.4	-33.1	0	62.16	-	-	74	-11.84	144	169	V
		5	* 5.35	45.89	RMS	34.4	-33.1	0	47.19	54	-6.81	-	-	144	169	V
			* 5.453604	46.07	RMS	34.3	-32.6	0	47.77	54	-6.23	-	-	144	169	V
			* 5.35	64.84	Pk	34.8	-37.68	0	61.96	-	-	74	-12.04	132	295	H
			* 5.353669	66.06	Pk	34.9	-37.67	0	63.29	-	-	74	-10.71	132	295	H
			* 5.35	48.95	RMS	34.8	-37.68	0	46.07	54	-7.93	-	-	132	295	H
			* 5.351592	49.35	RMS	34.9	-37.69	0	46.56	54	-7.44	-	-	132	295	H
			* 5.35	62.99	Pk	34.8	-37.68	0	60.11	-	-	74	-13.89	143	265	V
			* 5.350215	63.67	Pk	34.8	-37.68	0	60.79	-	-	74	-13.21	143	265	V
			* 5.35	48.7	RMS	34.8	-37.68	0	45.82	54	-8.18	-	-	143	265	V
			* 5.350425	48.75	RMS	34.8	-37.68	0	45.87	54	-8.13	-	-	143	265	V
EHT40 (SU Mode)	5310	6	* 5.35	67.65	Pk	34.7	-37.5	0	64.85	-	-	74	-9.15	173	171	H
			* 5.350729	71.46	Pk	34.7	-37.43	0	68.73	-	-	74	-5.27	173	171	H
			* 5.35	50.34	RMS	34.7	-37.5	0	47.54	54	-6.46	-	-	173	171	H
			* 5.350005	50.8	RMS	34.7	-37.5	0	48	54	-6	-	-	173	171	H
			* 5.35	61.77	Pk	34.7	-37.5	0	58.97	-	-	74	-15.03	178	114	V
			* 5.350239	62.97	Pk	34.7	-37.48	0	60.19	-	-	74	-13.81	178	114	V
		5	* 5.35	47.34	RMS	34.7	-37.5	0	44.54	54	-9.46	-	-	178	114	V
			* 5.354672	47.52	RMS	34.7	-37.23	0	44.99	54	-9.01	-	-	178	114	V
			* 5.35	68.47	Pk	34.7	-37.5	0	65.67	-	-	74	-8.33	235	126	H
			* 5.350239	72.1	Pk	34.7	-37.48	0	69.32	-	-	74	-4.68	235	126	H
			* 5.35	50.11	RMS	34.7	-37.5	0	47.31	54	-6.69	-	-	235	126	H
			* 5.351312	51.11	RMS	34.7	-37.4	0	48.41	54	-5.59	-	-	235	126	H
			* 5.35	59.75	Pk	34.7	-37.5	0	56.95	-	-	74	-17.05	91	266	V
			* 5.356095	61.52	Pk	34.7	-37.1	0	59.12	-	-	74	-14.88	91	266	V
			* 5.35	46.55	RMS	34.7	-37.5	0	43.75	54	-10.25	-	-	91	266	V
			* 5.353972	47.43	RMS	34.7	-37.3	0	44.83	54	-9.17	-	-	91	266	V
EHT80 (SU Mode)	5290	6	5.35	68.52	Pk	34.6	-39.12	0	64	-	-	74	-10	68	145	H
			5.35	50.81	RMS	34.6	-39.12	0	46.29	54	-7.71	-	-	68	145	H
			5.351475	53.43	RMS	34.6	-39.17	0	48.86	54	-5.14	-	-	68	145	H
			5.358498	73.44	Pk	34.6	-39.16	0	68.88	-	-	74	-5.12	68	145	H
			5.35	59.14	Pk	34.6	-39.12	0	54.62	-	-	74	-19.38	74	176	V
			5.35	47.8	RMS	34.6	-39.12	0	43.28	54	-10.72	-	-	74	176	V
		5	5.369325	49.26	RMS	34.6	-39.11	0	44.75	54	-9.25	-	-	74	176	V
			5.379475	61.42	Pk	34.6	-39.02	0	57	-	-	74	-17	74	176	V
			* 5.35	68.17	Pk	34.7	-37.5	0	65.37	-	-	74	-8.63	236	142	H
			* 5.354509	71.22	Pk	34.7	-37.25	0	68.67	-	-	74	-5.33	236	142	H
			* 5.35	52.07	RMS	34.7	-37.5	0	49.27	54	-4.73	-	-	236	142	H
			* 5.354019	52.7	RMS	34.7	-37.3	0	50.1	54	-3.9	-	-	236	142	H
			* 5.35	60.76	Pk	34.7	-37.5	0	57.96	-	-	74	-16.04	99	119	V
			* 5.35	48.09	RMS	34.7	-37.5	0	45.29	54	-8.71	-	-	99	119	V
			* 5.351219	64.53	Pk	34.7	-37.4	0	61.83	-	-	74	-12.17	99	119	V
			* 5.355418	48.32	RMS	34.7	-37.16	0	45.86	54	-8.14	-	-	99	119	V
EHT160 (SU Mode)	5250 (Upper)	6	* 5.35	67.67	Pk	34.7	-37.5	0	64.87	-	-	74	-9.13	179	148	H
			* 5.351802	72.68	Pk	34.7	-37.4	0	69.98	-	-	74	-4.02	179	148	H
			* 5.35	52.96	RMS	34.7	-37.5	0	50.16	54	-3.84	-	-	179	148	H
			* 5.398678	54.1	RMS	34.7	-37.4	0	51.4	54	-2.6	-	-	179	148	H
			* 5.35	58.82	Pk	34.7	-37.5	0	56.02	-	-	74	-17.98	183	114	V
			* 5.350355	63.17	Pk	34.7	-37.46	0	60.41	-	-	74	-13.59	183	114	V
		5	* 5.35	46.87	RMS	34.7	-37.5	0	44.07	54	-9.93	-	-	183	114	V
			* 5.351545	48.53	RMS	34.7	-37.4	0	45.83	54	-8.17	-	-	183	114	V
			* 5.35	66.45	Pk	34.7	-37.5	0	63.65	-	-	74	-10.35	177	243	H
			* 5.366828	70.74	Pk	34.7	-37.4	0	68.04	-	-	74	-5.96	177	243	H
			* 5.35	52.73	RMS	34.7	-37.5	0.14	50.07	54	-3.93	-	-	177	243	H
			* 5.352199	54.01	RMS	34.7	-37.4	0.14	51.45	54	-2.55	-	-	177	243	H
			* 5.35	61.48	Pk	34.7	-37.5	0	58.68	-	-	74	-15.32	126	282	V
			* 5.398328	65.63	Pk	34.7	-37.4	0	62.93	-	-	74	-11.07	126	282	V
			* 5.35	49.12	RMS	34.7	-37.5	0.14	46.46	54	-7.54	-	-	126	282	V
			* 5.390978	50.18	RMS	34.7	-37.5	0.14	47.52	54	-6.48	-	-	126	282	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

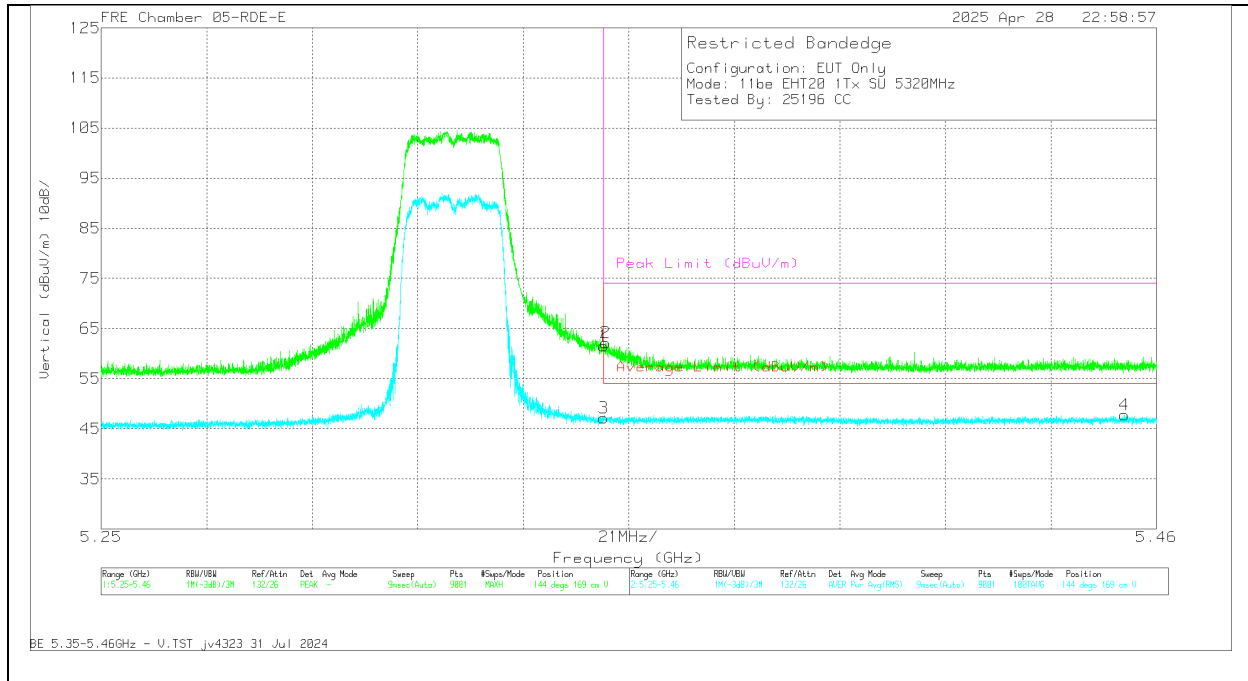
BANDEDGE (HIGH CHANNEL / 5320MHz), SU MODE**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80404 ACF (dB/m)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	67.73	Pk	34.4	-33.1	0	69.03	-	-	74	-4.97	137	165	H
2	* 5.350309	68.07	Pk	34.4	-33.1	0	69.37	-	-	74	-4.63	137	165	H
3	* 5.35	45.97	RMS	34.4	-33.1	0	47.27	54	-6.73	-	-	137	165	H
4	* 5.350659	48.74	RMS	34.4	-33.1	0	50.04	54	-3.96	-	-	137	165	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL / 5320MHz), SU MODE**VERTICAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80404 ACF (dB/m)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	60.29	Pk	34.4	-33.1	0	61.59	-	-	74	-12.41	144	169	V
2	* 5.350402	60.86	Pk	34.4	-33.1	0	62.16	-	-	74	-11.84	144	169	V
3	* 5.35	45.89	RMS	34.4	-33.1	0	47.19	54	-6.81	-	-	144	169	V
4	* 5.453604	46.07	RMS	34.3	-32.6	0	47.77	54	-6.23	-	-	144	169	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

10.1.12. 802.11be SISO PARTIAL RU MODE IN UNII-2A BAND – BANDEDGE

UNII-2a (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 106 / Index 54)	5320	6	* 5.35	62.72	Pk	34.4	-35.8	0	61.32	-	-	74	-12.68	113	140	H
			* 5.350449	64.29	Pk	34.4	-35.84	0	62.85	-	-	74	-11.15	113	140	H
			* 5.35	45.97	RMS	34.4	-35.8	0	44.57	54	-9.43	-	-	113	140	H
			* 5.442147	46.42	RMS	34.3	-35.41	0	45.31	54	-8.69	-	-	113	140	H
			* 5.35	56.19	Pk	34.4	-35.8	0	54.79	-	-	74	-19.21	123	194	V
			* 5.403904	58.1	Pk	34.4	-35.5	0	57	-	-	74	-17	123	194	V
		5	* 5.35	45.21	RMS	34.4	-35.8	0	43.81	54	-10.19	-	-	123	194	V
			* 5.397908	45.93	RMS	34.4	-35.5	0	44.83	54	-9.17	-	-	123	194	V
			* 5.35	62.53	Pk	34.5	-36.55	0	60.48	-	-	74	-13.52	281	114	H
			* 5.350495	63.12	Pk	34.5	-36.56	0	61.06	-	-	74	-12.94	281	114	H
			* 5.35	45.76	RMS	34.5	-36.55	0	43.71	54	-10.29	-	-	281	114	H
			* 5.354509	46.74	RMS	34.6	-36.58	0	44.76	54	-9.24	-	-	281	114	H
			* 5.35	55.98	Pk	34.5	-36.55	0	53.93	-	-	74	-20.07	235	227	V
			* 5.374388	59.03	Pk	34.6	-36.56	0	57.07	-	-	74	-16.93	235	227	V
			* 5.35	46.05	RMS	34.5	-36.55	0	44	54	-10	-	-	235	227	V
			* 5.406098	46.48	RMS	34.6	-36.54	0	44.54	54	-9.46	-	-	235	227	V
EHT40 (RU 106 / Index 56)	5310	6	* 5.35	61.69	Pk	34.5	-37.27	0	58.92	-	-	74	-15.08	92	160	H
			* 5.350309	63.15	Pk	34.5	-37.26	0	60.39	-	-	74	-13.61	92	160	H
			* 5.35	47.16	RMS	34.5	-37.27	0	44.39	54	-9.61	-	-	92	160	H
			* 5.354275	48.16	RMS	34.5	-37.23	0	45.43	54	-8.57	-	-	92	160	H
			* 5.35	59.71	Pk	34.5	-37.27	0	56.94	-	-	74	-17.06	138	101	V
			* 5.365125	59.53	Pk	34.5	-37.2	0	56.83	-	-	74	-17.17	138	101	V
		5	* 5.35	46.26	RMS	34.5	-37.27	0	43.49	54	-10.51	-	-	138	101	V
			* 5.420541	47.51	RMS	34.6	-37.08	0	45.03	54	-8.97	-	-	138	101	V
			* 5.35	64.08	Pk	34.9	-38.81	0	60.17	-	-	74	-13.83	6	214	H
			* 5.35	66.16	Pk	34.9	-38.82	0	62.24	-	-	74	-11.76	6	214	H
			* 5.350215	47.5	RMS	34.9	-38.81	0	43.59	54	-10.41	-	-	6	214	H
			* 5.350239	48.11	RMS	35	-38.73	0	44.38	54	-9.62	-	-	6	214	H
			* 5.35	57.79	Pk	34.9	-38.81	0	53.88	-	-	74	-20.12	252	300	V
			* 5.35	62.44	Pk	34.9	-38.83	0	58.51	-	-	74	-15.49	252	300	V
			* 5.350425	46.68	RMS	34.9	-38.81	0	42.77	54	-11.23	-	-	252	300	V
			* 5.350845	47.92	RMS	35	-38.75	0	44.17	54	-9.83	-	-	252	300	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

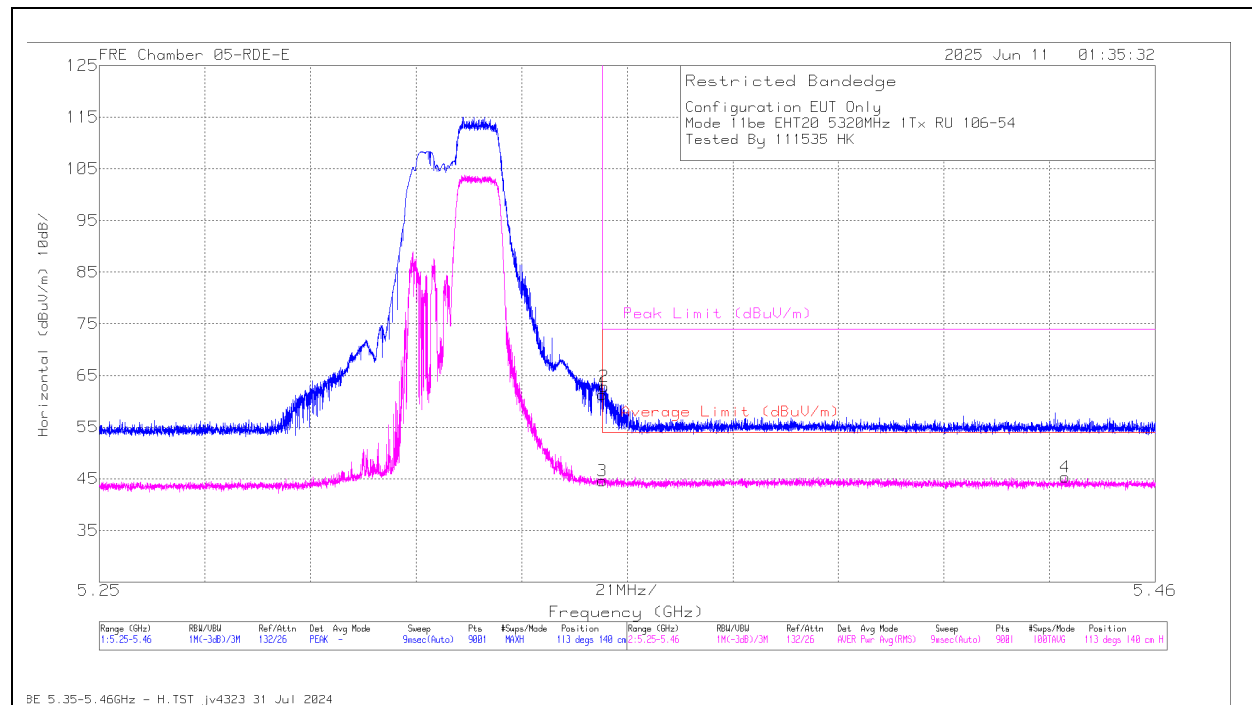
RMS - RMS detection

UNII-2a (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 (RU 484 / Index 66)	5290	6	* 5.35	63.63	Pk	34.5	-39.05	0	59.08	-	-	74	-14.92	203	340	H
			* 5.35	48.01	RMS	34.5	-39.05	0	43.46	54	-10.54	-	-	203	340	H
			* 5.350542	48.95	RMS	34.5	-39.03	0	44.42	54	-9.58	-	-	203	340	H
			* 5.352035	64.07	Pk	34.5	-39	0	59.57	-	-	74	-14.43	203	340	H
			* 5.35	70.81	Pk	34.5	-39.05	0	66.26	-	-	74	-7.74	182	249	V
			* 5.35	54	RMS	34.5	-39.05	0	49.45	54	-4.55	-	-	182	249	V
		5	* 5.350145	55.3	RMS	34.5	-39.04	0	50.76	54	-3.24	-	-	182	249	V
			* 5.350985	73.46	Pk	34.5	-39.01	0	68.95	-	-	74	-5.05	182	249	V
			* 5.35	72.39	Pk	34.5	-39.05	0	67.84	-	-	74	-6.16	53	110	H
			* 5.35	51.71	RMS	34.5	-39.05	0	47.16	54	-6.84	-	-	53	110	H
			* 5.350169	53.62	RMS	34.5	-39.04	0	49.08	54	-4.92	-	-	53	110	H
			* 5.351732	73.46	Pk	34.5	-39	0	68.96	-	-	74	-5.04	53	110	H
			* 5.35	64.99	Pk	34.5	-39.05	0	60.44	-	-	74	-13.56	283	288	V
			* 5.35	47.97	RMS	34.5	-39.05	0	43.42	54	-10.58	-	-	283	288	V
			* 5.350425	66.65	Pk	34.5	-39.03	0	62.12	-	-	74	-11.88	283	288	V
			* 5.352245	49.29	RMS	34.5	-39	0	44.79	54	-9.21	-	-	283	288	V
EHT80 (RU 106 / Index 60)	5290	6	* 5.35	61.81	Pk	34.5	-39.05	0	57.26	-	-	74	-16.74	241	268	H
			* 5.35	47.59	RMS	34.5	-39.05	0	43.04	54	-10.96	-	-	241	268	H
			* 5.350192	63.48	Pk	34.5	-39.04	0	58.94	-	-	74	-15.06	241	268	H
			* 5.436594	48.43	RMS	34.6	-38.82	0	44.21	54	-9.79	-	-	241	268	H
			* 5.35	70.09	Pk	34.5	-39.05	0	65.54	-	-	74	-8.46	198	317	V
			* 5.35	49.06	RMS	34.5	-39.05	0	44.51	54	-9.49	-	-	198	317	V
		5	* 5.350075	71.44	Pk	34.5	-39.05	0	66.89	-	-	74	-7.11	198	317	V
			* 5.350285	49.97	RMS	34.5	-39.04	0	45.43	54	-8.57	-	-	198	317	V
			* 5.35	66.81	Pk	34.4	-38.18	0	63.03	-	-	74	-10.97	129	220	H
			* 5.35	47.93	RMS	34.4	-38.18	0	44.15	54	-9.85	-	-	129	220	H
			* 5.350075	69.1	Pk	34.4	-38.19	0	65.31	-	-	74	-8.69	129	220	H
			* 5.351312	49.19	RMS	34.4	-38.25	0	45.34	54	-8.66	-	-	129	220	H
			* 5.35	63.14	Pk	34.4	-38.18	0	59.36	-	-	74	-14.64	57	225	V
			* 5.35	47.56	RMS	34.4	-38.18	0	43.78	54	-10.22	-	-	57	225	V
			* 5.350215	65.3	Pk	34.4	-38.2	0	61.5	-	-	74	-12.5	57	225	V
			* 5.444737	48.39	RMS	34.4	-37.96	0	44.83	54	-9.17	-	-	57	225	V
EHT160 (RU 242 / Index S64)	5250 (Upper)	6	* 5.35	69.38	Pk	34.9	-38.81	0	65.47	-	-	74	-8.53	105	161	H
			* 5.352712	72.41	Pk	34.9	-38.81	0	68.5	-	-	74	-5.5	105	161	H
			* 5.35	53.48	RMS	34.9	-38.81	0	49.57	54	-4.43	-	-	105	161	H
			* 5.350729	53.94	RMS	34.9	-38.84	0	50	54	-4	-	-	105	161	H
			* 5.35	61.89	Pk	34.9	-38.81	0	57.98	-	-	74	-16.02	134	178	V
			* 5.352945	64.31	Pk	34.9	-38.8	0	60.41	-	-	74	-13.59	134	178	V
		5	* 5.35	49.12	RMS	34.9	-38.81	0	45.21	54	-8.79	-	-	134	178	V
			* 5.351359	49.96	RMS	34.9	-38.85	0	46.01	54	-7.99	-	-	134	178	V
			* 5.35	64.1	Pk	34.4	-38.18	0	60.32	-	-	74	-13.68	290	253	H
			* 5.35	50.76	RMS	34.4	-38.18	0	46.98	54	-7.02	-	-	290	253	H
			* 5.350355	51.36	RMS	34.4	-38.21	0	47.55	54	-6.45	-	-	290	253	H
			* 5.350565	67.1	Pk	34.4	-38.23	0	63.27	-	-	74	-10.73	290	253	H
			* 5.35	60.9	Pk	34.4	-38.18	0	57.12	-	-	74	-16.88	16	370	V
			* 5.35	48.53	RMS	34.4	-38.18	0	44.75	54	-9.25	-	-	16	370	V
			* 5.352175	49.59	RMS	34.4	-38.24	0	45.75	54	-8.25	-	-	16	370	V
			* 5.355395	62.32	Pk	34.4	-38.18	0	58.54	-	-	74	-15.46	16	370	V
EHT160 (RU 52 / Index S52)	5250 (Upper)	6	* 5.35	67.14	Pk	34.9	-38.81	0	63.23	-	-	74	-10.77	106	160	H
			* 5.350192	69.21	Pk	34.9	-38.82	0	65.29	-	-	74	-8.71	106	160	H
			* 5.35	48.23	RMS	34.9	-38.81	0	44.32	54	-9.68	-	-	106	160	H
			* 5.368672	49.53	RMS	35	-38.72	0	45.81	54	-8.19	-	-	106	160	H
			* 5.35	59.05	Pk	34.9	-38.81	0	55.14	-	-	74	-18.86	135	178	V
			* 5.350985	61.97	Pk	34.9	-38.85	0	58.02	-	-	74	-15.98	135	178	V
		5	* 5.35	46.54	RMS	34.9	-38.81	0	42.63	54	-11.37	-	-	135	178	V
			* 5.357285	48.17	RMS	35	-38.73	0	44.44	54	-9.56	-	-	135	178	V
			* 5.35	63.51	Pk	34.4	-38.18	0	59.73	-	-	74	-14.27	26	267	H
			* 5.35	47.81	RMS	34.4	-38.18	0	44.03	54	-9.97	-	-	26	267	H
			* 5.350425	64.47	Pk	34.4	-38.21	0	60.66	-	-	74	-13.34	26	267	H
			* 5.356445	49.04	RMS	34.4	-38.15	0	45.29	54	-8.71	-	-	26	267	H
			* 5.35	59.5	Pk	34.4	-38.18	0	55.72	-	-	74	-18.28	5	347	V
			* 5.35	47.56	RMS	34.4	-38.18	0	43.78	54	-10.22	-	-	5	347	V
			* 5.350472	62.31	Pk	34.4	-38.22	0	58.49	-	-	74	-15.51	5	347	V
			* 5.401618	48.86	RMS	34.4	-38.08	0	45.18	54	-8.82	-	-	5	347	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

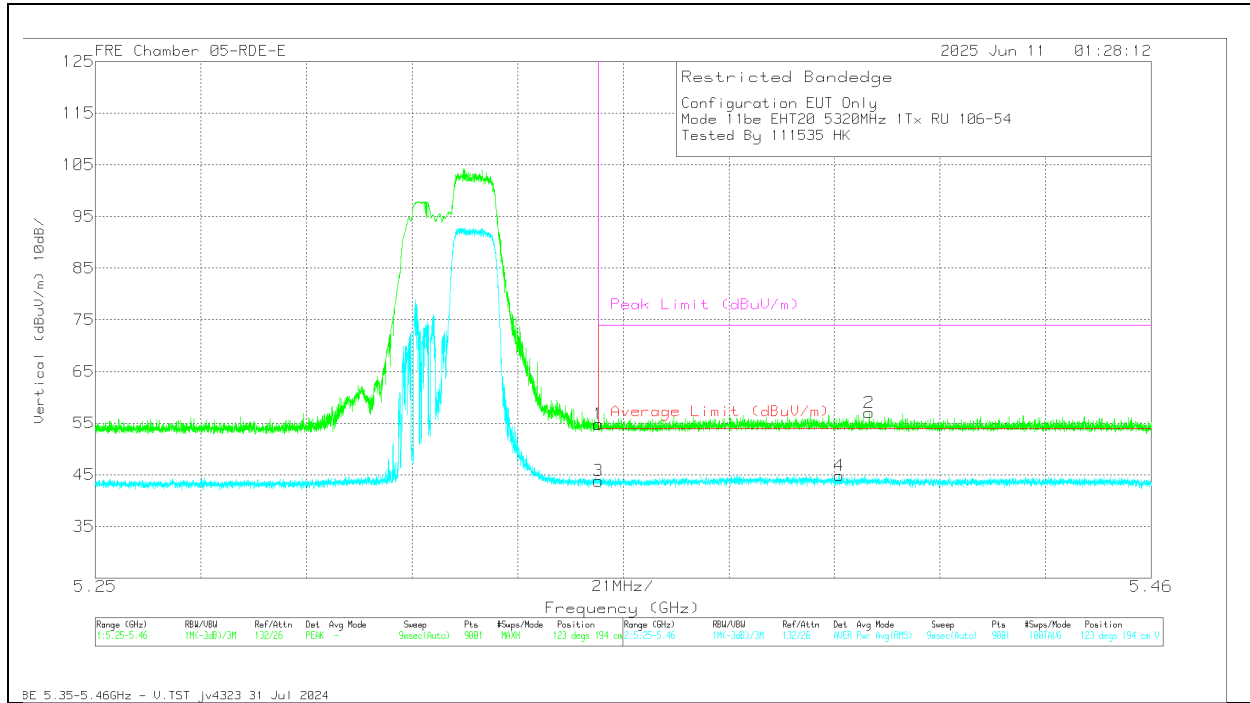
1TX Antenna 6 MODE: PARTIAL RU 106**BANDEGE (HIGH CHANNEL / 5320MHz)****HORIZONTAL RESULT****Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80404 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	62.72	Pk	34.4	-35.8	0	61.32	-	-	74	-12.68	113	140	H
2	* 5.350449	64.29	Pk	34.4	-35.84	0	62.85	-	-	74	-11.15	113	140	H
3	* 5.35	45.97	RMS	34.4	-35.8	0	44.57	54	-9.43	-	-	113	140	H
4	* 5.442147	46.42	RMS	34.3	-35.41	0	45.31	54	-8.69	-	-	113	140	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1TX Antenna 6 MODE: PARTIAL RU 106**BANDEGE (HIGH CHANNEL / 5320MHz)****VERTICAL RESULT****Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80404 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	56.19	Pk	34.4	-35.8	0	54.79	-	-	74	-19.21	123	194	V
2	* 5.403904	58.1	Pk	34.4	-35.5	0	57	-	-	74	-17	123	194	V
3	* 5.35	45.21	RMS	34.4	-35.8	0	43.81	54	-10.19	-	-	123	194	V
4	* 5.397908	45.93	RMS	34.4	-35.5	0	44.83	54	-9.17	-	-	123	194	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

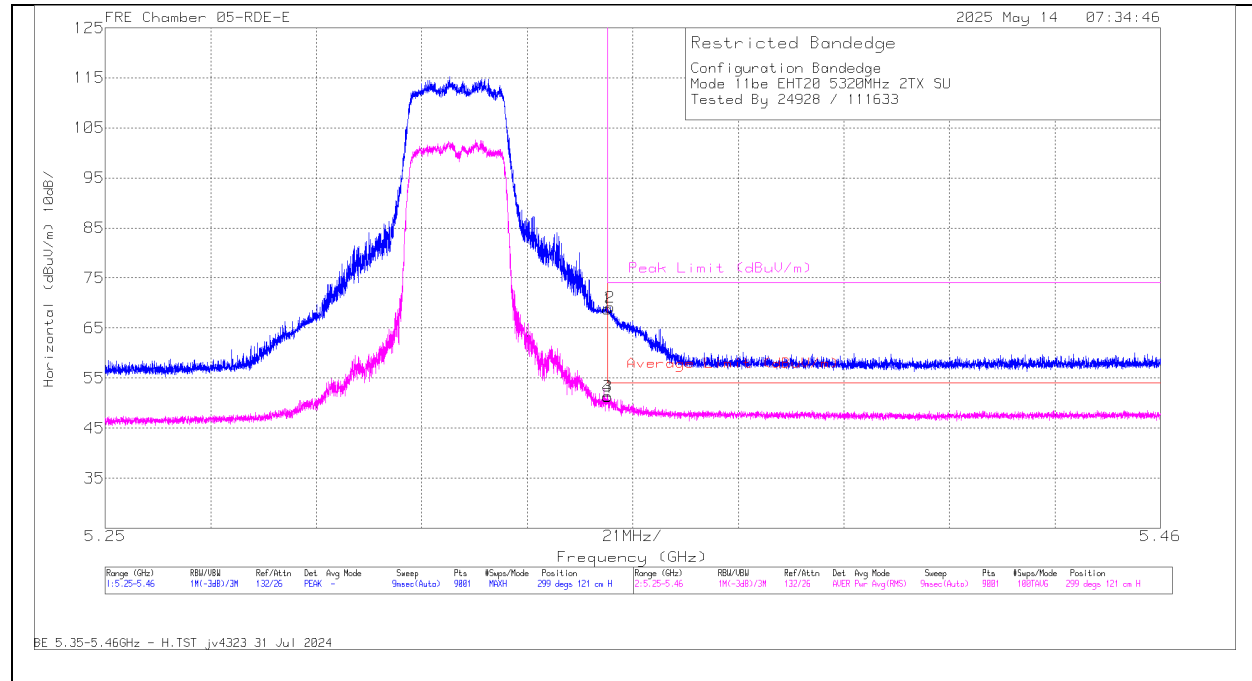
10.1.13. 802.11be MIMO SU MODE IN UNII-2A BAND – BANDEDGE

UNII-2a (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	5320	6 + 5	* 5.35	67.45	Pk	34.4	-33.1	0	68.75	-	-	74	-5.25	299	121	H
			* 5.350542	67.82	Pk	34.4	-33.1	0	69.12	-	-	74	-4.88	299	121	H
			* 5.35	49.42	RMS	34.4	-33.1	0	50.72	54	-3.28	-	-	299	121	H
			* 5.350005	49.28	RMS	34.4	-33.1	0	50.58	54	-3.42	-	-	299	121	H
			* 5.35	61.71	Pk	34.4	-33.1	0	63.01	-	-	74	-10.99	15	381	V
			* 5.350495	62.46	Pk	34.4	-33.1	0	63.76	-	-	74	-10.24	15	381	V
			* 5.35	46.06	RMS	34.4	-33.1	0	47.36	54	-6.64	-	-	15	381	V
EHT40 (SU Mode)	5310	6 + 5	* 5.350682	46.78	RMS	34.4	-33.1	0	48.08	54	-5.92	-	-	15	381	V
			* 5.35	66.76	Pk	34.4	-33.1	0	68.06	-	-	74	-5.94	303	177	H
			* 5.351265	67.28	Pk	34.4	-33.1	0	68.58	-	-	74	-5.42	303	177	H
			* 5.35	46.69	RMS	34.4	-33.1	0	47.99	54	-6.01	-	-	303	177	H
			* 5.350099	48.37	RMS	34.4	-33.1	0	49.67	54	-4.33	-	-	303	177	H
			* 5.35	64.64	Pk	34.4	-33.1	0	65.94	-	-	74	-8.06	3	292	V
			* 5.350309	64.92	Pk	34.4	-33.1	0	66.22	-	-	74	-7.78	3	292	V
EHT80 (SU Mode)	5290	6 + 5	* 5.35	46.58	RMS	34.4	-33.1	0	47.88	54	-6.12	-	-	3	292	V
			* 5.350355	47.85	RMS	34.4	-33.1	0	49.15	54	-4.85	-	-	3	292	V
			* 5.35	68.31	Pk	34.7	-37.5	0	65.51	-	-	74	-8.49	181	218	H
			* 5.353295	71.64	Pk	34.7	-37.37	0	68.97	-	-	74	-5.03	181	218	H
			* 5.35	50.73	RMS	34.7	-37.5	0	47.93	54	-6.07	-	-	181	218	H
			* 5.353949	52.41	RMS	34.7	-37.31	0	49.8	54	-4.2	-	-	181	218	H
			* 5.35	66.76	Pk	34.7	-37.5	0	63.96	-	-	74	-10.04	206	332	V
EHT160 (SU Mode)	5250 (Upper)	6 + 5	* 5.354579	70.86	Pk	34.7	-37.24	0	68.32	-	-	74	-5.68	206	332	V
			* 5.35	51.15	RMS	34.7	-37.5	0	48.35	54	-5.65	-	-	206	332	V
			* 5.355115	51.99	RMS	34.7	-37.19	0	49.5	54	-4.5	-	-	206	332	V
			* 5.35	66	Pk	34.7	-37.5	0	63.2	-	-	74	-10.8	161	220	H
			* 5.35	49.74	RMS	34.7	-37.5	0.14	47.08	54	-6.92	-	-	161	220	H
			* 5.353622	70.38	Pk	34.7	-37.34	0	67.74	-	-	74	-6.26	161	220	H
			* 5.392635	53.72	RMS	34.7	-37.5	0.14	51.06	54	-2.94	-	-	161	220	H
			* 5.35	66.23	Pk	34.7	-37.5	0	63.43	-	-	74	-10.57	209	313	V
			* 5.350285	68.94	Pk	34.7	-37.47	0	66.17	-	-	74	-7.83	209	313	V
			* 5.35	51.57	RMS	34.7	-37.5	0.14	48.91	54	-5.09	-	-	209	313	V
			* 5.359525	52.47	RMS	34.7	-37.25	0.14	50.06	54	-3.94	-	-	209	313	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

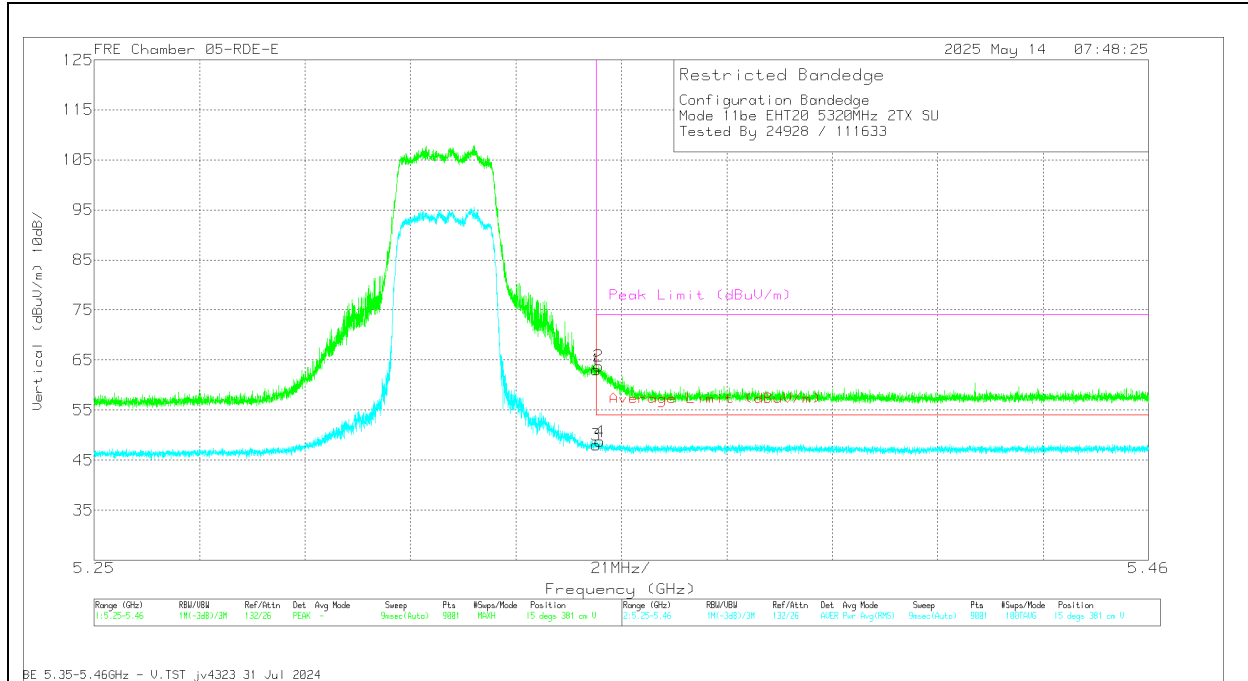
BANDEDGE (HIGH CHANNEL / 5320MHz), SU MODE**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80404 ACF (dB/m)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	67.45	Pk	34.4	-33.1	0	68.75	-	-	74	-5.25	299	121	H
2	* 5.350542	67.82	Pk	34.4	-33.1	0	69.12	-	-	74	-4.88	299	121	H
3	* 5.35	49.42	RMS	34.4	-33.1	0	50.72	54	-3.28	-	-	299	121	H
4	* 5.350005	49.28	RMS	34.4	-33.1	0	50.58	54	-3.42	-	-	299	121	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL / 5320MHz), SU MODE**VERTICAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80404 ACF (dB/m)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	61.71	Pk	34.4	-33.1	0	63.01	-	-	74	-10.99	15	381	V
2	* 5.350495	62.46	Pk	34.4	-33.1	0	63.76	-	-	74	-10.24	15	381	V
3	* 5.35	46.06	RMS	34.4	-33.1	0	47.36	54	-6.64	-	-	15	381	V
4	* 5.350682	46.78	RMS	34.4	-33.1	0	48.08	54	-5.92	-	-	15	381	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

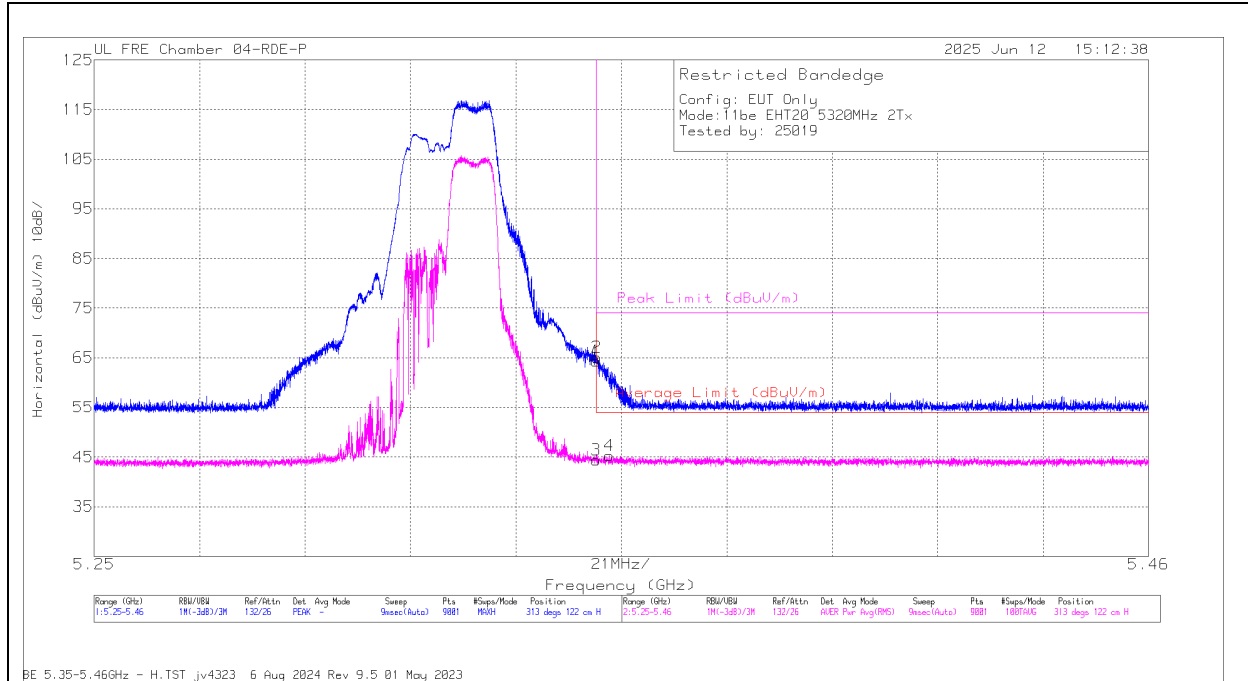
10.1.14. 802.11be MIMO PARTIAL RU MODE IN UNII-2A BAND – BANDEDGE

UNII-2a (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 106 / Index 54)	5320	6 + 5	* 5.35	68.14	Pk	34.4	-38.18	0	64.36	-	-	74	-9.64	313	122	H
			* 5.35	48.2	RMS	34.4	-38.18	0	44.42	54	-9.58	-	-	313	122	H
			* 5.350075	68.86	Pk	34.4	-38.19	0	65.07	-	-	74	-8.93	313	122	H
			* 5.352595	49.18	RMS	34.4	-38.25	0	45.33	54	-8.67	-	-	313	122	H
			* 5.35	59.94	Pk	34.4	-38.18	0	56.16	-	-	74	-17.84	7	375	V
			* 5.35	47.5	RMS	34.4	-38.18	0	43.72	54	-10.28	-	-	7	375	V
			* 5.350775	61.58	Pk	34.4	-38.24	0	57.74	-	-	74	-16.26	7	375	V
EHT40 (RU 106/ Index 56)	5310	6 + 5	* 5.35	64.02	Pk	34.5	-36.55	0	61.97	-	-	74	-12.03	319	273	H
			* 5.35	47.85	RMS	34.5	-36.55	0	45.8	54	-8.2	-	-	319	273	H
			* 5.350005	48.08	RMS	34.5	-36.55	0	46.03	54	-7.97	-	-	319	273	H
			* 5.350355	64.85	Pk	34.5	-36.56	0	62.79	-	-	74	-11.21	319	273	H
			* 5.35	63.31	Pk	34.5	-36.55	0	61.26	-	-	74	-12.74	347	316	V
			* 5.35	46.39	RMS	34.5	-36.55	0	44.34	54	-9.66	-	-	347	316	V
			* 5.350192	63.48	Pk	34.5	-36.56	0	61.42	-	-	74	-12.58	347	316	V
EHT80 (RU 484 / Index 66)	5290	6 + 5	* 5.35	69.71	Pk	34.4	-35.8	0	68.31	-	-	74	-5.69	292	178	H
			* 5.350099	69.98	Pk	34.4	-35.81	0	68.57	-	-	74	-5.43	292	178	H
			* 5.35	46.25	RMS	34.4	-35.8	0	44.85	54	-9.15	-	-	292	178	H
			* 5.350542	49.4	RMS	34.4	-35.85	0	47.95	54	-6.05	-	-	292	178	H
			* 5.35	61.48	Pk	34.4	-35.8	0	60.08	-	-	74	-13.92	15	179	V
			* 5.350075	63	Pk	34.4	-35.81	0	61.59	-	-	74	-12.41	15	179	V
			* 5.35	45.43	RMS	34.4	-35.8	0	44.03	54	-9.97	-	-	15	179	V
EHT80 (RU 106 / Index 60)	5290	6 + 5	* 5.376208	46.01	RMS	34.4	-35.5	0	44.91	54	-9.09	-	-	15	179	V
			* 5.35	71.76	Pk	34.9	-38.81	0	67.85	-	-	74	-6.15	312	119	H
			* 5.350332	72.02	Pk	34.9	-38.82	0	68.1	-	-	74	-5.9	312	119	H
			* 5.35	47.86	RMS	34.9	-38.81	0	43.95	54	-10.05	-	-	312	119	H
			* 5.350145	50.14	RMS	34.9	-38.82	0	46.22	54	-7.78	-	-	312	119	H
			* 5.35	60.94	Pk	34.9	-38.81	0	57.03	-	-	74	-16.97	309	281	V
			* 5.350029	67.12	Pk	34.9	-38.81	0	63.21	-	-	74	-10.79	309	281	V
EHT160 (RU 242 / Index 564)	5250 (Upper)	6 + 5	* 5.35	47.06	RMS	34.9	-38.81	0	43.15	54	-10.85	-	-	309	281	V
			* 5.429127	47.84	RMS	35	-38.64	0	44.2	54	-9.8	-	-	309	281	V
			* 5.35	66.64	Pk	34.6	-37.99	0	63.25	-	-	74	-10.75	185	104	H
			* 5.35	50.26	RMS	34.6	-37.99	0	46.87	54	-7.13	-	-	185	104	H
			* 5.350425	50.99	RMS	34.6	-38	0	47.59	54	-6.41	-	-	185	104	H
			* 5.351289	68.31	Pk	34.6	-38.02	0	64.89	-	-	74	-9.11	185	104	H
			* 5.35	63.1	Pk	34.6	-37.99	0	59.71	-	-	74	-14.29	191	228	V
EHT160 (RU 52 / Index 552)	5250 (Upper)	6 + 5	* 5.35	47.55	RMS	34.6	-37.99	0	44.16	54	-9.84	-	-	191	228	V
			* 5.350029	63.89	Pk	34.6	-37.99	0	60.5	-	-	74	-13.5	191	228	V
			* 5.350309	47.95	RMS	34.6	-38	0	44.55	54	-9.45	-	-	191	228	V
			* 5.35	65.21	Pk	34.6	-37.99	0	61.82	-	-	74	-12.18	172	163	H
			* 5.35	47.07	RMS	34.6	-37.99	0	43.68	54	-10.32	-	-	172	163	H
			* 5.350565	65.95	Pk	34.6	-38.01	0	62.54	-	-	74	-11.46	172	163	H
			* 5.404651	48.38	RMS	34.7	-37.7	0	45.38	54	-8.62	-	-	172	163	H
			* 5.35	65.04	Pk	34.6	-37.99	0	61.65	-	-	74	-12.35	201	348	V
			* 5.35	46.39	RMS	34.6	-37.99	0	43	54	-11	-	-	201	348	V
			* 5.350985	65.4	Pk	34.6	-38.02	0	61.98	-	-	74	-12.02	201	348	V
			* 5.404091	48.03	RMS	34.7	-37.71	0	45.02	54	-8.98	-	-	201	348	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

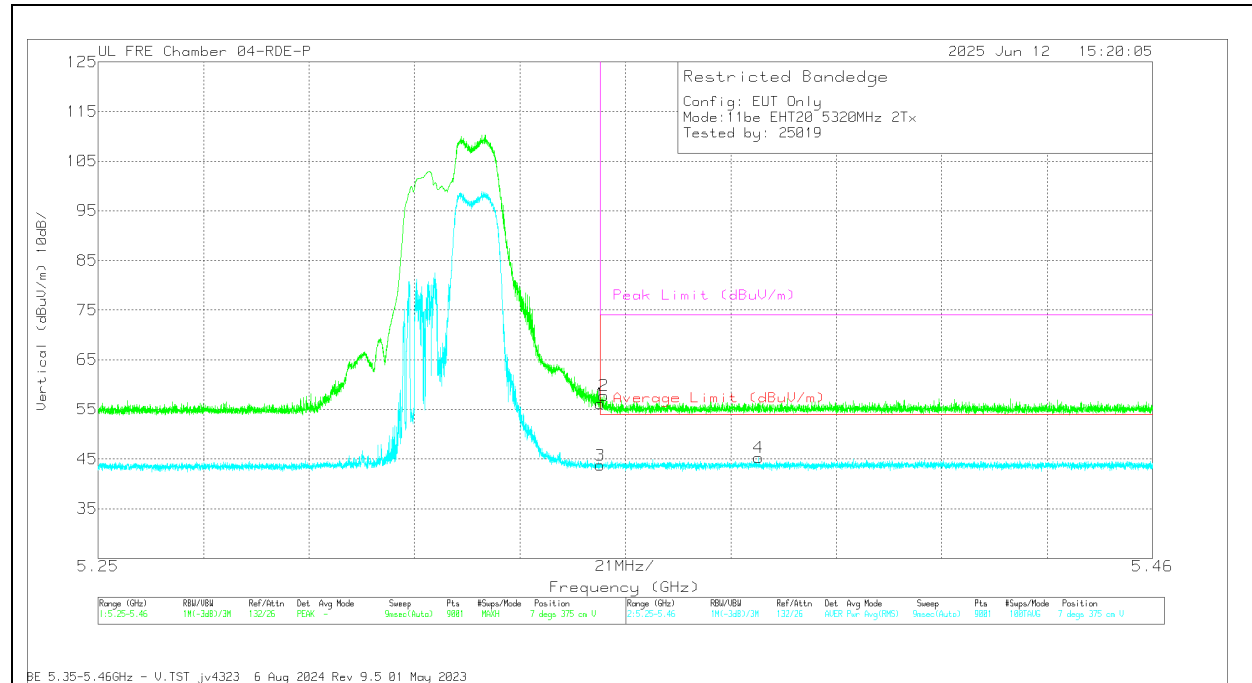
RMS - RMS detection

BANDEDGE (HIGH CHANNEL / 5320MHz), PARTIAL RU 106**HORIZONTAL RESULT****Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200897 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	68.14	Pk	34.4	0	-38.18	64.36	-	-	74	-9.64	313	122	H
3	* 5.35	48.2	RMS	34.4	0	-38.18	44.42	54	-9.58	-	-	313	122	H
2	*	68.86	Pk	34.4	0	-38.19	65.07	-	-	74	-8.93	313	122	H
4	5.350075	49.18	RMS	34.4	0	-38.25	45.33	54	-8.67	-	-	313	122	H
	5.352595													

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL / 5320MHz), PARTIAL RU 106**VERTICAL RESULT****Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200897 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	59.94	Pk	34.4	0	-38.18	56.16	-	-	74	-17.84	7	375	V
3	* 5.35	47.5	RMS	34.4	0	-38.18	43.72	54	-10.28	-	-	7	375	V
2	* 5.350775	61.58	Pk	34.4	0	-38.24	57.74	-	-	74	-16.26	7	375	V
4	* 5.381551	48.91	RMS	34.4	0	-38.06	45.25	54	-8.75	-	-	7	375	V

Pk - Peak detector

RMS - RMS detection

10.1.15. 802.11n/ac MIMO MODE IN UNII-2A BAND – SPURIOUS EMISSIONS

20MHz

UNII-2a (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5260	6 + 5	* 4.003195	55.88	PK-U	33.5	-46.04	0	43.34	-	-	74	-30.66	5	279	H
			* 4.002848	44.04	ADR	33.5	-46.04	0	31.5	54	-22.5	-	-	5	279	H
			* 3.978555	59.37	PK-U	33.5	-45.96	0	46.91	-	-	74	-27.09	146	381	V
			* 3.977432	44.03	ADR	33.5	-45.97	0	31.56	54	-22.44	-	-	146	381	V
			1.788033	60.14	PK-U	30.2	-49.13	0	41.21	-	-	68.2	-26.99	192	288	V
			1.792811	60.39	PK-U	30.2	-49.12	0	41.47	-	-	68.2	-26.73	102	195	H
			9.934004	55.5	PK-U	37.1	-46.15	0	46.45	-	-	68.2	-21.75	256	131	V
	5300	6 + 5	9.951855	55.62	PK-U	37.1	-45.89	0	46.83	-	-	68.2	-21.37	119	399	H
			* 3.970099	55.45	PK-U	33.5	-45.8	0	43.15	-	-	74	-30.85	265	205	H
			* 3.971613	43.96	ADR	33.5	-45.83	0	31.63	54	-22.37	-	-	265	205	H
			* 3.957957	55.54	PK-U	33.5	-45.75	0	43.29	-	-	74	-30.71	110	154	V
			* 3.956884	43.66	ADR	33.5	-45.74	0	31.42	54	-22.58	-	-	110	154	V
			* 11.811068	52.11	PK-U	38.6	-42.69	0	48.02	-	-	74	-25.98	348	236	H
			* 11.811667	40.84	ADR	38.6	-42.67	0	36.77	54	-17.23	-	-	348	236	H
			* 11.807164	52.58	PK-U	38.6	-42.83	0	48.35	-	-	74	-25.65	211	379	V
			* 11.807905	40.85	ADR	38.6	-42.8	0	36.65	54	-17.35	-	-	211	379	V
			1.831371	59.67	PK-U	30.6	-49.35	0	40.92	-	-	68.2	-27.28	131	318	V
			1.832314	60.04	PK-U	30.6	-49.34	0	41.3	-	-	68.2	-26.9	47	138	H
	5320	6 + 5	* 3.985324	56.02	PK-U	33.5	-45.95	0	43.57	-	-	74	-30.43	246	331	H
			* 3.985739	43.8	ADR	33.5	-45.95	0	31.35	54	-22.65	-	-	246	331	H
			* 3.977273	55.93	PK-U	33.5	-45.97	0	43.46	-	-	74	-30.54	85	331	V
			* 3.97734	44.34	ADR	33.5	-45.97	0	31.87	54	-22.13	-	-	85	331	V
			1.998473	59.98	PK-U	31.4	-48.87	0	42.51	-	-	68.2	-25.69	272	156	V
			2.000577	59.91	PK-U	31.4	-48.89	0	42.42	-	-	68.2	-25.78	85	163	H
			10.0531	55.88	PK-U	37.3	-45.13	0	48.05	-	-	68.2	-20.15	283	242	H
			10.098784	56.16	PK-U	37.3	-45.39	0	48.07	-	-	68.2	-20.13	13	219	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-2a (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5270	6 + 5	* 1.276921	59.98	PK-U	29.4	-47.9	0	41.48	-	-	74	-32.52	360	199	H
			* 1.274896	48.68	ADR	29.4	-47.89	0	30.19	54	-23.81	-	-	360	199	H
			* 3.97283	56.36	PK-U	33.4	-45.82	0	43.94	-	-	74	-30.06	360	101	H
			* 3.971836	44.3	ADR	33.4	-45.88	0	31.82	54	-22.18	-	-	360	101	H
			* 1.283011	59.72	PK-U	29.4	-47.8	0	41.32	-	-	74	-32.68	360	101	V
			* 1.279848	47.71	ADR	29.4	-47.9	0	29.21	54	-24.79	-	-	360	101	V
			* 3.975997	57.32	PK-U	33.4	-45.8	0	44.92	-	-	74	-29.08	360	101	V
			* 3.9755	44.6	ADR	33.4	-45.8	0	32.2	54	-21.8	-	-	360	101	V
			* 11.595659	56.22	PK-U	38.4	-43.4	0	51.22	-	-	74	-22.78	360	101	H
			* 11.594562	44.49	ADR	38.4	-43.4	0	39.49	54	-14.51	-	-	360	101	H
			* 11.59884	56.06	PK-U	38.4	-43.4	0	51.06	-	-	74	-22.94	360	101	V
			* 11.602575	44.48	ADR	38.4	-43.3	0	39.58	54	-14.42	-	-	360	101	V
	5310	6 + 5	* 1.274387	60.84	PK-U	29.4	-47.84	0	42.4	-	-	74	-31.6	360	100	H
			* 1.273584	48.74	ADR	29.4	-47.84	0	30.3	54	-23.7	-	-	360	100	H
			* 3.850694	55.4	PK-U	33.1	-45.8	0	42.7	-	-	74	-31.3	360	100	H
			* 3.848344	43.74	ADR	33.1	-45.8	0	31.04	54	-22.96	-	-	360	100	H
			* 1.273191	60.17	PK-U	29.3	-47.88	0	41.59	-	-	74	-32.41	360	100	V
			* 1.272126	48.22	ADR	29.3	-47.9	0	29.62	54	-24.38	-	-	360	100	V
			* 3.849801	55.84	PK-U	33.1	-45.8	0	43.14	-	-	74	-30.86	360	100	V
			* 3.848156	44.14	ADR	33.1	-45.8	0	31.44	54	-22.56	-	-	360	100	V
			* 11.5978	56.86	PK-U	38.4	-43.4	0	51.86	-	-	74	-22.14	360	200	H
			* 11.597288	44.33	ADR	38.4	-43.4	0	39.33	54	-14.67	-	-	360	200	H
			* 11.596634	56.75	PK-U	38.4	-43.4	0	51.75	-	-	74	-22.25	360	101	V
			* 11.597376	44.67	ADR	38.4	-43.4	0	39.67	54	-14.33	-	-	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-2a (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5290	6 + 5	* 1.230113	61.75	PK-U	28.5	-49.8	0	40.45	-	-	74	-33.55	360	101	H
			* 1.230783	49.95	ADR	28.5	-49.8	0	28.65	54	-25.35	-	-	360	101	H
			* 3.889043	58.02	PK-U	33.5	-47.4	0	44.12	-	-	74	-29.88	360	199	H
			* 3.889648	45.85	ADR	33.5	-47.4	0	31.95	54	-22.05	-	-	360	199	H
			* 1.235467	62.05	PK-U	28.5	-49.75	0	40.8	-	-	74	-33.2	360	101	V
			* 1.236228	50.31	ADR	28.5	-49.7	0	29.11	54	-24.89	-	-	360	101	V
			* 12.346314	54.05	PK-U	38.9	-43.1	0	49.85	-	-	74	-24.15	360	200	V
			* 12.347014	42.19	ADR	38.9	-43.1	0	37.99	54	-16.01	-	-	360	200	V
			* 3.135569	58.21	PK-U	32.9	-47.9	0	43.21	-	-	68.2	-24.99	360	101	V
			* 15.146658	53.74	PK-U	39.8	-42.2	0	51.34	-	-	68.2	-16.86	360	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

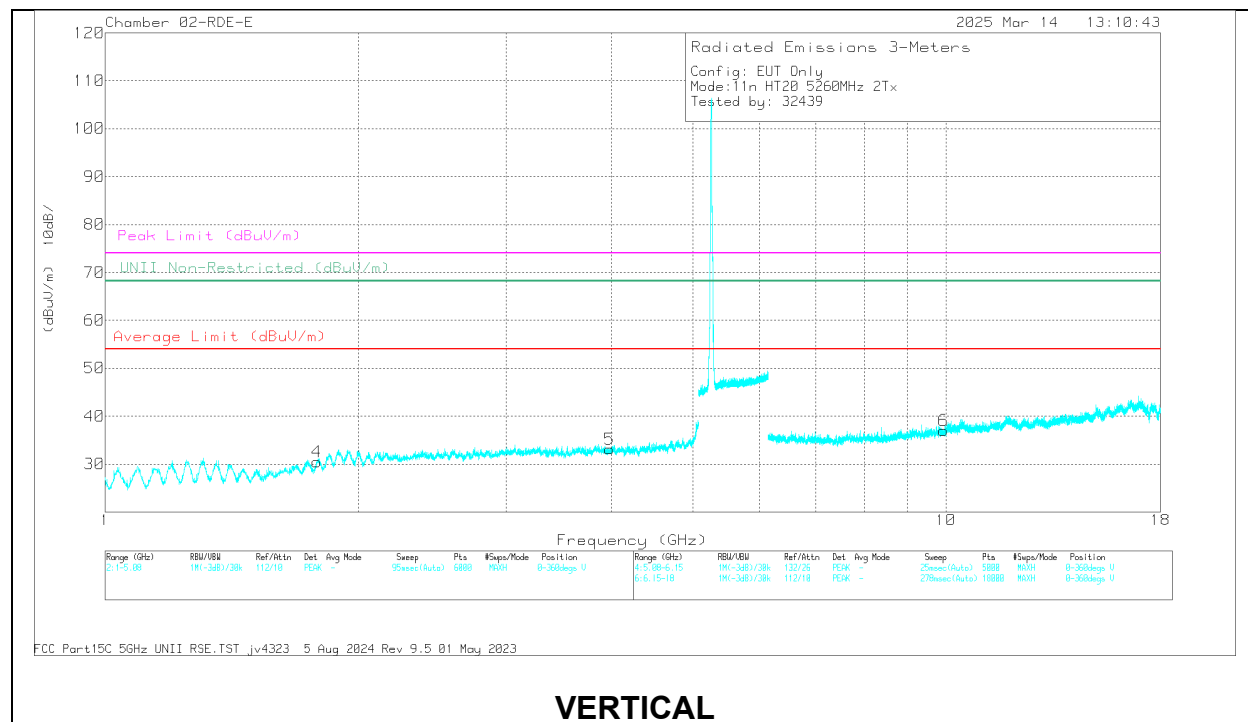
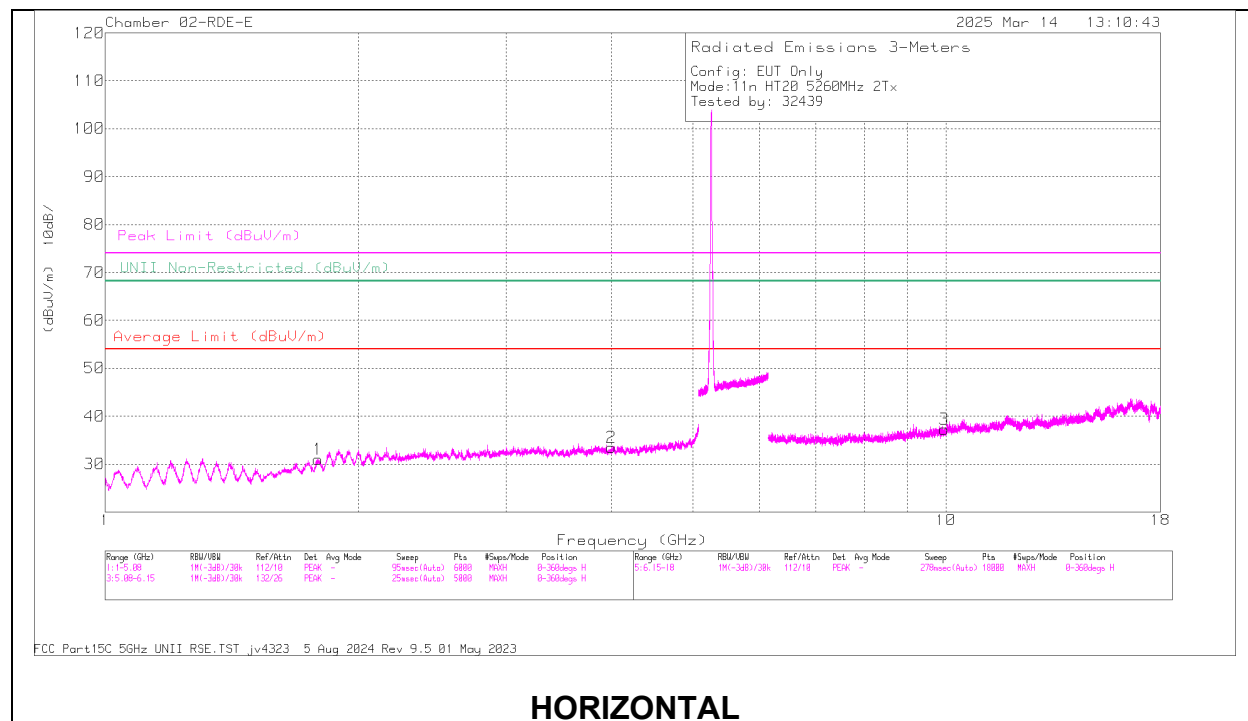
160MHz

UNII-2a (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5250 (Straddle)	6 + 5	* 15.750704	54.35	PK-U	40.7	-42.63	0	52.42	-	-	74	-21.58	153	181	H
			* 15.748261	42.61	ADR	40.7	-42.6	0	40.71	54	-13.29	-	-	153	181	H
			* 15.752327	54.41	PK-U	40.7	-42.6	0	52.51	-	-	74	-21.49	118	201	V
			* 15.75192	42.6	ADR	40.7	-42.6	0	40.7	54	-13.3	-	-	118	201	V
			* 3.234603	57.89	PK-U	32.8	-47.34	0	43.35	-	-	68.2	-24.85	38	148	V
			* 3.236325	58.23	PK-U	32.8	-47.4	0	43.63	-	-	68.2	-24.57	238	372	H
			* 10.501945	55.74	PK-U	37.6	-45.2	0	48.14	-	-	68.2	-20.06	56	231	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5260MHz)**LOW CHANNEL RESULTS**

RADIATED EMISSIONS

Maker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 4.003195	55.88	PK-U	33.5	0	-46.04	43.34	-	-	74	-30.66	5	279	H
2	* 4.002848	44.04	ADR	33.5	0	-46.04	31.5	54	-22.5	-	-	5	279	H
5	* 3.978555	59.37	PK-U	33.5	0	-45.96	46.91	-	-	74	-27.09	146	381	V
5	* 3.977432	44.03	ADR	33.5	0	-45.97	31.56	54	-22.44	-	-	146	381	V
4	1.788033	60.14	PK-U	30.2	0	-49.13	41.21	-	-	68.2	-26.99	192	288	V
1	1.792611	60.39	PK-U	30.2	0	-49.12	41.47	-	-	68.2	-26.73	102	195	H
6	9.934004	55.5	PK-U	37.1	0	-46.15	46.45	-	-	68.2	-21.75	256	131	V
3	9.951855	55.62	PK-U	37.1	0	-45.89	46.83	-	-	68.2	-21.37	119	399	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

10.1.16. 802.11be MIMO MODE IN UNII-2A BAND – SPURIOUS EMISSIONS

20MHz

UNII-2a (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5260	6 + 5	* 1.272463	60.76	PK-U	28.9	-48.9	0	40.76	-	-	74	-33.24	1	199	V
			* 1.27397	49.28	ADR	28.9	-48.7	0	29.48	54	-24.52	-	-	1	199	V
			* 1.329737	60.5	PK-U	28.7	-48.9	0	40.3	-	-	74	-33.7	1	199	H
			* 1.335064	49.39	ADR	28.7	-48.9	0	29.19	54	-24.81	-	-	1	199	H
			* 15.778929	43.49	ADR	40	-38	0	45.49	54	-8.51	-	-	1	199	H
			* 15.782764	56.22	PK-U	40	-38.4	0	57.82	-	-	74	-16.18	1	199	H
			10.391176	53.18	PK-U	37.4	-41.5	0	49.08	-	-	68.2	-19.12	1	101	H
			13.527252	52.05	PK-U	38.7	-39.2	0	51.55	-	-	68.2	-16.65	1	101	H
			17.341801	51.46	PK-U	41.1	-37	0	55.56	-	-	68.2	-12.64	1	101	H
			* 8.336291	53.41	PK-U	35.9	-42.1	0	47.21	-	-	74	-26.79	1	200	H
			* 8.328095	41.96	ADR	35.9	-42.5	0	35.36	54	-18.64	-	-	1	200	H
			* 16.053254	51.55	PK-U	40.3	-37.9	0	53.95	-	-	74	-20.05	1	200	H
	5300	6 + 5	* 16.048396	40.48	ADR	40.3	-38	0	42.78	54	-11.22	-	-	1	200	H
			* 7.705413	52.59	PK-U	35.9	-42	0	46.49	-	-	74	-27.51	1	101	V
			* 7.716231	41.66	ADR	35.9	-41.9	0	35.66	54	-18.34	-	-	1	101	V
			2.401356	59.47	PK-U	32.3	-48.2	0	43.57	-	-	68.2	-24.63	1	101	H
			3.288176	55.64	PK-U	32.8	-44.8	0	43.64	-	-	68.2	-24.56	1	101	H
			16.882117	52.89	PK-U	41.7	-38	0	56.59	-	-	68.2	-11.61	1	101	V
			* 11.672486	40.78	ADR	38.5	-40.4	0	38.88	54	-15.12	-	-	0	200	V
			* 11.688295	52.14	PK-U	38.5	-40.7	0	49.94	-	-	74	-24.06	0	200	V
			* 12.649575	40.57	ADR	38.9	-39.9	0	39.57	54	-14.43	-	-	0	101	H
			* 12.659175	52.25	PK-U	38.9	-39.6	0	51.55	-	-	74	-22.45	0	101	H
			* 1.268836	61.52	PK-U	28.9	-48.8	0	41.62	-	-	74	-32.38	0	200	H
			* 1.273189	49.43	ADR	28.9	-48.8	0	29.53	54	-24.47	-	-	0	200	H
	5320	6 + 5	* 15.959385	43.06	ADR	40.2	-38.4	0	44.86	54	-9.14	-	-	0	101	H
			* 15.960167	54.99	PK-U	40.2	-38.7	0	56.49	-	-	74	-17.51	0	101	H
			16.572489	51.87	PK-U	41.1	-38.3	0	54.67	-	-	68.2	-13.53	0	101	V
			1.754849	60.49	PK-U	29.5	-48.7	0	41.29	-	-	68.2	-26.91	0	200	V
11be (RU 106 / Highest PSD)	5260 (Low Index)	6 + 5	* 2.689739	58.24	PK-U	32.2	-47.32	0	43.12	-	-	74	-30.88	234	170	H
			* 2.689743	46.71	ADR	32.2	-47.32	0	31.59	54	-22.41	-	-	234	170	H
			* 2.691443	58.14	PK-U	32.2	-47.31	0	43.03	-	-	74	-30.97	260	391	V
			* 2.691441	46.71	ADR	32.2	-47.31	0	31.6	54	-22.4	-	-	260	391	V
			* 3.766402	57.02	PK-U	33.3	-46.44	0	43.88	-	-	74	-30.12	129	309	H
			* 3.767029	45.16	ADR	33.3	-46.4	0	32.06	54	-21.94	-	-	129	309	H
			* 3.765231	56.84	PK-U	33.3	-46.47	0	43.67	-	-	74	-30.33	173	259	V
			* 3.765253	45.11	ADR	33.3	-46.47	0	31.94	54	-22.06	-	-	173	259	V
			10.508548	56.62	PK-U	37.6	-44.56	0	49.66	-	-	68.2	-18.54	213	171	H
			10.533999	56.48	PK-U	37.6	-44.35	0	49.73	-	-	68.2	-18.47	240	188	V
	5300 (Low Index)	6 + 5	* 4.012495	56.09	PK-U	33.4	-46.17	0	43.32	-	-	74	-30.68	194	272	H
			* 4.012397	44.63	ADR	33.4	-46.17	0	31.86	54	-22.14	-	-	194	272	H
			* 4.012701	56.94	PK-U	33.5	-46.18	0	44.26	-	-	74	-29.74	225	296	V
			* 4.013202	44.57	ADR	33.5	-46.19	0	31.88	54	-22.12	-	-	225	296	V
			* 10.644411	56.49	PK-U	37.6	-44.89	0	49.2	-	-	74	-24.8	256	208	H
			* 10.643931	44.98	ADR	37.6	-44.9	0	37.68	54	-16.32	-	-	256	208	H
			* 10.643436	56.31	PK-U	37.6	-44.88	0	49.03	-	-	74	-24.97	283	106	V
			* 10.646725	44.61	ADR	37.6	-44.88	0	37.33	54	-16.67	-	-	283	106	V
			* 15.90501	55.48	PK-U	41	-42.55	0	53.93	-	-	74	-20.07	326	183	H
			* 15.905274	44.05	ADR	41	-42.55	0	42.5	54	-11.5	-	-	326	183	H
			* 15.910345	55.12	PK-U	41	-42.56	0	53.56	-	-	74	-20.44	147	159	V
			* 15.910421	43.77	ADR	41	-42.56	0	42.21	54	-11.79	-	-	147	159	V
	5320 (High Index)	6 + 5	2.011296	59.27	PK-U	31.4	-47.79	0	42.88	-	-	68.2	-25.32	205	170	H
			2.008517	59.7	PK-U	31.4	-47.87	0	43.23	-	-	68.2	-24.97	341	236	V
			* 7.282867	55.04	PK-U	35.6	-43.7	0	46.94	-	-	74	-27.06	272	128	H
			* 7.286363	43.43	ADR	35.6	-43.7	0	35.33	54	-18.67	-	-	272	128	H
			* 7.282504	54.89	PK-U	35.6	-43.7	0	46.79	-	-	74	-27.21	353	186	V
			* 7.283449	43.42	ADR	35.6	-43.7	0	35.32	54	-18.68	-	-	353	186	V
			12.927008	55.26	PK-U	38.8	-42.81	0	51.25	-	-	68.2	-16.95	181	160	H
			12.940022	55.88	PK-U	38.8	-42.8	0	51.88	-	-	68.2	-16.32	100	301	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-2a (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5270	6 + 5	* 8.127977	55.74	PK-U	35.8	-43.8	0	47.74	-	-	74	-26.26	273	104	H
			* 8.128166	44.17	ADR	35.8	-43.82	0	36.15	54	-17.85	-	-	273	104	H
			* 10.721239	56.38	PK-U	37.8	-44.2	0	49.98	-	-	74	-24.02	290	127	H
			* 10.7208	44.87	ADR	37.8	-44.2	0	38.47	54	-15.53	-	-	290	127	H
			* 8.109716	55.83	PK-U	35.8	-43.8	0	47.83	-	-	74	-26.17	47	313	V
			* 8.107059	44.25	ADR	35.8	-43.8	0	36.25	54	-17.75	-	-	47	313	V
			* 10.719311	56.5	PK-U	37.8	-44.27	0	50.03	-	-	74	-23.97	351	275	V
			* 10.722215	45.01	ADR	37.8	-44.2	0	38.61	54	-15.39	-	-	351	275	V
			2.587539	58.5	PK-U	32.4	-48	0	42.9	-	-	68.2	-25.3	287	287	V
			2.587787	58.89	PK-U	32.4	-48	0	43.29	-	-	68.2	-24.91	199	260	H
			2.127717	59.44	PK-U	31.3	-48	0	42.74	-	-	68.2	-25.46	360	199	V
			2.134904	59.29	PK-U	31.3	-48	0	42.59	-	-	68.2	-25.61	360	101	H
	5310	6 + 5	4.46154	57.56	PK-U	33.9	-46.7	0	44.76	-	-	68.2	-23.44	360	101	V
			4.462822	57.44	PK-U	33.9	-46.7	0	44.64	-	-	68.2	-23.56	360	101	H
			13.898488	57.24	PK-U	39.5	-43.8	0	52.94	-	-	68.2	-15.26	360	101	V
			13.89925	57.69	PK-U	39.5	-43.8	0	53.39	-	-	68.2	-14.81	360	101	H
			* 1.37057	59.72	PK-U	28.6	-47.65	0	40.67	-	-	74	-33.33	4	282	H
			* 1.374203	47.73	ADR	28.5	-47.65	0	28.58	54	-25.42	-	-	4	282	H
11be (RU 106 / Highest PSD)	5270 (Mid Index)	6 + 5	* 1.371275	59.13	PK-U	28.6	-47.65	0	40.08	-	-	74	-33.92	254	214	V
			* 1.372148	47.75	ADR	28.5	-47.66	0	28.59	54	-25.41	-	-	254	214	V
			* 10.853563	55.7	PK-U	37.7	-44.5	0	48.9	-	-	74	-25.1	226	194	H
			* 10.853906	44.32	ADR	37.7	-44.52	0	37.5	54	-16.5	-	-	226	194	H
			* 10.852632	55.58	PK-U	37.7	-44.46	0	48.82	-	-	74	-25.18	168	102	V
			* 10.853037	44.22	ADR	37.7	-44.47	0	37.45	54	-16.55	-	-	168	102	V
			* 16.040133	55.76	PK-U	41	-42.7	0	54.06	-	-	74	-19.94	170	390	H
			* 16.042664	43.62	ADR	41	-42.72	0	41.9	54	-12.1	-	-	170	390	H
			* 16.039621	54.9	PK-U	41	-42.69	0	53.21	-	-	74	-20.79	287	215	V
			* 16.041172	43.38	ADR	41	-42.72	0	41.66	54	-12.34	-	-	287	215	V
	5310 (Mid Index)	6 + 5	* 3.915093	56.64	PK-U	33.5	-46.42	0	43.72	-	-	74	-30.28	343	102	H
			* 3.914472	44.52	ADR	33.5	-46.44	0	31.58	54	-22.42	-	-	343	102	H
			* 3.909941	56.36	PK-U	33.5	-46.34	0	43.52	-	-	74	-30.48	280	144	V
			* 3.909007	44.49	ADR	33.5	-46.26	0	31.73	54	-22.27	-	-	280	144	V
			* 10.674161	56.22	PK-U	37.6	-45.08	0	48.74	-	-	74	-25.26	84	196	H
			* 10.671436	44.24	ADR	37.6	-45.01	0	36.83	54	-17.17	-	-	84	196	H
			* 10.647912	55.91	PK-U	37.6	-44.92	0	48.59	-	-	74	-25.41	345	269	V
			* 10.649767	44.63	ADR	37.6	-44.93	0	37.3	54	-16.7	-	-	345	269	V
			* 15.94438	55.09	PK-U	40.9	-42.61	0	53.38	-	-	74	-20.62	74	140	H
			* 15.940631	43.78	ADR	40.9	-42.66	0	42.02	54	-11.98	-	-	74	140	H
			* 15.924339	55.2	PK-U	41	-42.56	0	53.64	-	-	74	-20.36	264	336	V
			* 15.921454	43.77	ADR	41	-42.56	0	42.21	54	-11.79	-	-	264	336	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-2a (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbl/ Ftr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5290	6 + 5	* 1.234908	62.23	PK-U	28.5	0	-49.8	40.93	-	-	74	-33.07	360	200	H
			* 1.23783	50.34	ADR	28.5	0	-49.78	29.06	54	-24.94	-	-	360	200	H
			* 1.228687	62.5	PK-U	28.5	0	-49.8	41.2	-	-	74	-32.8	360	101	V
			* 1.230659	49.95	ADR	28.5	0	-49.8	28.65	54	-25.35	-	-	360	101	V
			* 11.853125	54.18	PK-U	38.6	0	-44.01	48.77	-	-	74	-25.23	360	199	H
			* 11.853947	42.84	ADR	38.6	0	-44.09	37.35	54	-16.65	-	-	360	199	H
			* 11.89102	54.08	PK-U	38.7	0	-43.9	48.88	-	-	74	-25.12	360	199	V
			* 11.891606	42.62	ADR	38.7	0	-43.9	37.42	54	-16.58	-	-	360	199	V
11be (Partial RU 484 / Highest PSD)	5290 (Low Index)	6 + 5	2.394736	60.78	PK-U	32.1	0	-49.4	43.48	-	-	68.2	-24.72	360	101	V
			2.402059	60.54	PK-U	32.2	0	-49.5	43.24	-	-	68.2	-24.96	360	101	H
			2.095006	59.63	PK-U	31.8	0	-48.28	43.15	-	-	68.2	-25.05	133	254	H
			2.098703	59.47	PK-U	31.8	0	-48.3	42.97	-	-	68.2	-25.23	92	311	V
			* 10.685184	56.15	PK-U	37.6	0	-45.03	48.72	-	-	74	-25.28	172	254	H
			* 10.684877	44.56	ADR	37.6	0	-45.03	37.13	54	-16.87	-	-	172	254	H
			* 10.694582	56.24	PK-U	37.6	0	-45.08	48.76	-	-	74	-25.24	136	217	V
			* 10.696321	44.6	ADR	37.6	0	-45.01	37.19	54	-16.81	-	-	136	217	V
11be (RU 106 / Highest PSD)	5290 (High Index)	6 + 5	* 15.862833	56.21	PK-U	41	0	-42.45	54.76	-	-	74	-19.24	229	177	H
			* 15.86213	44.1	ADR	41	0	-42.43	42.67	54	-11.33	-	-	229	177	H
			* 15.859696	55.98	PK-U	41	0	-42.44	54.54	-	-	74	-19.46	264	317	V
			* 15.860479	44.32	ADR	41	0	-42.44	42.88	54	-11.12	-	-	264	317	V
			* 1.418183	59.76	PK-U	28	0	-47.63	40.13	-	-	74	-33.87	88	100	H
			* 1.419885	47.72	ADR	28	0	-47.64	28.08	54	-25.92	-	-	88	100	H
			* 1.414428	60.05	PK-U	28	0	-47.67	40.38	-	-	74	-33.62	137	233	V
			* 1.413492	47.77	ADR	28	0	-47.68	28.09	54	-25.91	-	-	137	233	V
			* 10.867036	56.32	PK-U	37.7	0	-44.62	49.4	-	-	74	-24.6	195	325	H
			* 10.866622	44.37	ADR	37.7	0	-44.6	37.47	54	-16.53	-	-	195	325	H
			* 15.547587	55.43	PK-U	40.8	0	-42.97	53.26	-	-	74	-20.74	142	393	H
			* 15.549092	43.93	ADR	40.8	0	-42.95	41.78	54	-12.22	-	-	142	393	H
			* 10.87019	55.67	PK-U	37.7	0	-44.57	48.8	-	-	74	-25.2	194	358	V
			* 10.868177	44.47	ADR	37.7	0	-44.59	37.58	54	-16.42	-	-	194	358	V
			* 15.547462	55.26	PK-U	40.8	0	-42.98	53.08	-	-	74	-20.92	136	244	V
			* 15.546671	43.75	ADR	40.8	0	-42.98	41.57	54	-12.43	-	-	136	244	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

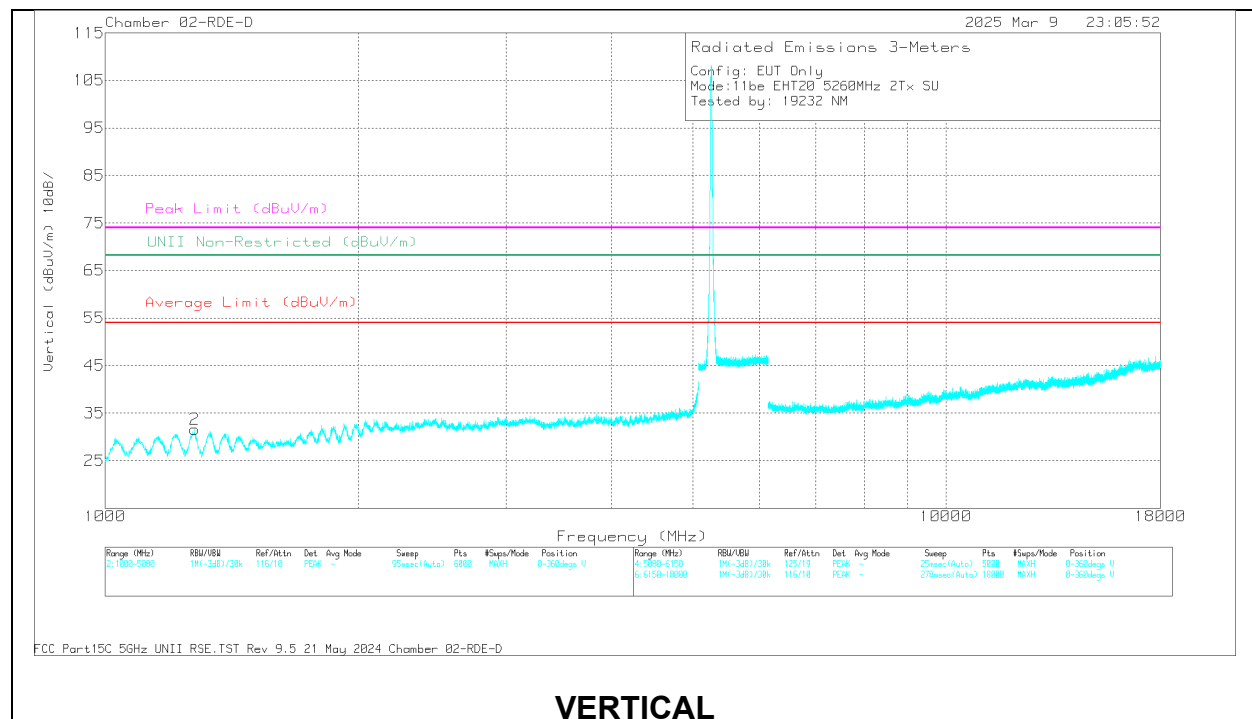
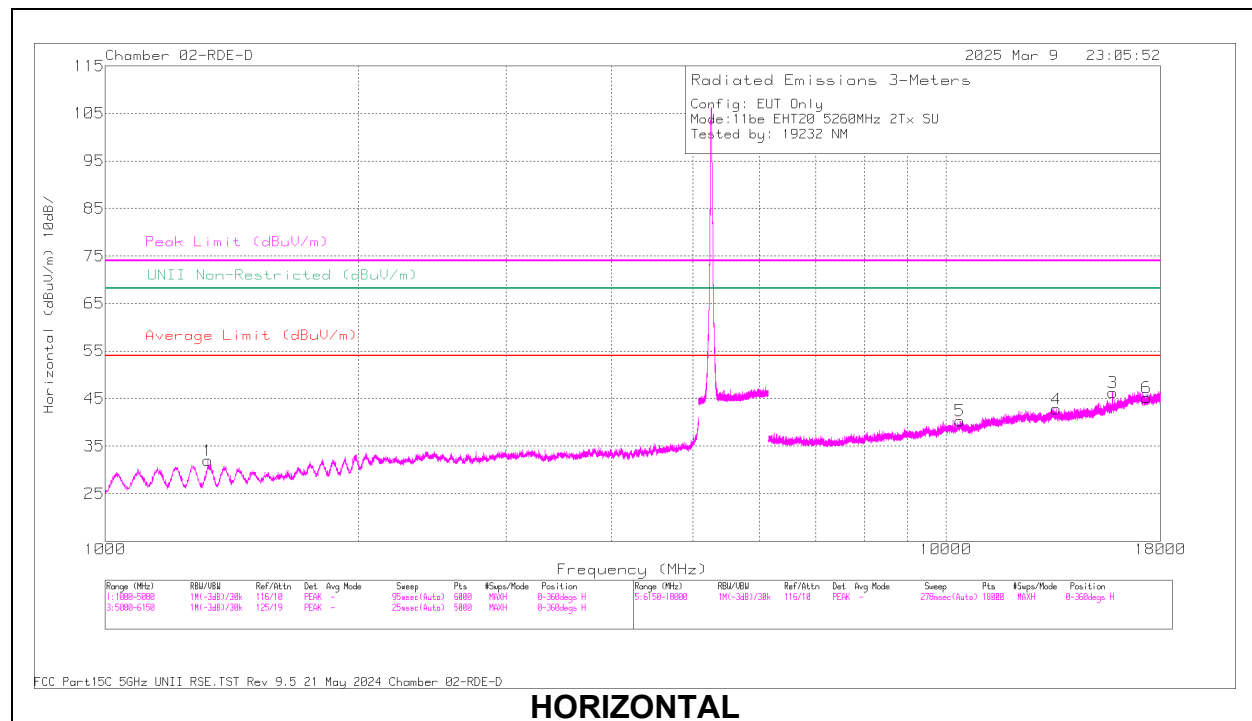
160MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbl/ Ftr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5250	6 + 5	3.105557	58.17	PK-U	32.9	-47.9	0	43.17	-	-	68.2	-25.03	241	171	V
			3.109924	58.16	PK-U	32.9	-47.99	0	43.07	-	-	68.2	-25.13	92	276	H
			10.500421	56.11	PK-U	37.6	-45.2	0	48.51	-	-	68.2	-19.69	229	169	H
			10.500953	55.99	PK-U	37.6	-45.2	0	48.39	-	-	68.2	-19.81	329	143	V
			14.748855	54.86	PK-U	39.4	-43.61	0	50.65	-	-	68.2	-17.55	351	168	V
			14.749196	54.33	PK-U	39.4	-43.58	0	50.15	-	-	68.2	-18.05	306	166	H
11be (RU 242 / highest PSD)	5250 (High Index)	6 + 5	1.887321	56.34	PK-U	30.7	-46.2	0	40.84	-	-	68.2	-27.36	43	205	H
			1.883663	44.71	ADR	30.7	-46.3	0	29.11	-	-	-	-	43	205	H
			3.26376	55.7	PK-U	32.9	-45.2	0	43.4	-	-	74	-30.6	264	170	H
			3.262348	43.85	ADR	32.9	-45.27	0	31.48	54	-22.52	-	-	264	170	H
			1.882092	55.98	PK-U	30.7	-46.3	0	40.38	-	-	68.2	-27.82	258	399	V
			1.881932	44.46	ADR	30.7	-46.3	0	28.86	-	-	-	-	258	399	V
			3.263863	55.52	PK-U	32.9	-45.2	0	43.22	-	-	74	-30.78	53	181	V
			3.262802	43.91	ADR	32.9	-45.22	0	31.59	54	-22.41	-	-	53	181	V
			10.554808	53.58	PK-U	38	-42.52	0	49.06	-	-	68.2	-19.14	53	200	H
			10.557071	42.06	ADR	38	-42.59	0	37.47	-	-	-	-	53	200	H
11be (RU 52 / highest PSD)	5250 (Low Index)	6 + 5	10.552338	53.41	PK-U	38	-42.57	0	48.84	-	-	68.2	-19.36	53	200	V
			10.550476	41.98	ADR	38	-42.5	0	37.48	-	-	-	-	53	200	V
			1.71209	56.24	PK-U	29.4	-46.39	0	39.25	-	-	68.2	-28.95	216	392	H
			3.453266	55	PK-U	32.8	-45	0	42.8	-	-	68.2	-25.4	212	123	H
			* 1.680704	56.95	PK-U	29	-46.37	0	39.58	-	-	74	-34.42	167	397	V
			* 1.689563	45.49	ADR	29.1	-46.44	0	28.15	54	-25.85	-	-	167	397	V
			3.45358	54.63	PK-U	32.8	-45	0	42.43	-	-	68.2	-25.77	276	148	V
			* 10.77424	53.15	PK-U	37.9	-42.8	0	48.25	-	-	74	-25.75	276	101	H
			* 10.772546	41.82	ADR	37.9	-42.85	0	36.87	54	-17.13	-	-	276	101	H
			* 10.77146	53.58	PK-U	37.9	-42.8	0	48.68	-	-	74	-25.32	276	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5260MHz)

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	200896 ACF(dB/m)	Amp/Cbl/Filtr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 1.272463	60.76	PK-U	28.9	-48.9	0	40.76	-	-	74	-33.24	1	199	V
2	* 1.27397	49.28	ADR	28.9	-48.7	0	29.48	54	-24.52	-	-	1	199	V
1	* 1.329737	60.5	PK-U	28.7	-48.9	0	40.3	-	-	74	-33.7	1	199	H
1	* 1.335064	49.39	ADR	28.7	-48.9	0	29.19	54	-24.81	-	-	1	199	H
3	* 15.778929	43.49	ADR	40	-38	0	45.49	54	-8.51	-	-	1	199	H
3	* 15.782764	56.22	PK-U	40	-38.4	0	57.82	-	-	74	-16.18	1	199	H
5	10.391176	53.18	PK-U	37.4	-41.5	0	49.08	-	-	68.2	-19.12	1	101	H
4	13.527252	52.05	PK-U	38.7	-39.2	0	51.55	-	-	68.2	-16.65	1	101	H
6	17.341801	51.46	PK-U	41.1	-37	0	55.56	-	-	68.2	-12.64	1	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

10.1.17. 802.11n/ac SISO MODE IN UNII-2C BAND – BANDEDGES

UNII-2c (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
HT20	5500	6	* 5.46	56.35	Pk	34.8	-34.7	0	56.45	-	-	68.2	-11.75	311	156	H	
			* 5.452843	58.76	Pk	34.8	-34.8	0	58.76	-	-	74	-15.24	311	156	H	
			5.47	62	Pk	34.8	-34.8	0	62	-	-	68.2	-6.2	311	156	H	
			5.469643	63.41	Pk	34.8	-34.7	0	63.51	-	-	68.2	-4.69	311	156	H	
			* 5.46	45.14	RMS	34.8	-34.7	0	45.24	54	-8.76	-	-	311	156	H	
			* 5.361155	46.47	RMS	34.8	-34.8	0	46.47	54	-7.53	-	-	311	156	H	
			5.47	45.33	RMS	34.8	-34.8	0	45.33	-	-	-	-	311	156	H	
			* 5.361155	46.47	RMS	34.8	-34.8	0	46.47	54	-7.53	-	-	311	156	H	
			* 5.46	55.41	Pk	34.8	-34.7	0	55.51	-	-	68.2	-12.69	291	152	V	
			* 5.366044	58.57	Pk	34.8	-34.9	0	58.47	-	-	74	-15.53	291	152	V	
			5.47	55.48	Pk	34.8	-34.8	0	55.48	-	-	68.2	-12.72	291	152	V	
			5.466932	59.95	Pk	34.8	-34.9	0	59.85	-	-	68.2	-8.35	291	152	V	
			* 5.46	45.17	RMS	34.8	-34.7	0	45.27	54	-8.73	-	-	291	152	V	
			* 5.440888	46.52	RMS	34.8	-34.6	0	46.72	54	-7.28	-	-	291	152	V	
			5.47	45.45	RMS	34.8	-34.8	0	45.45	-	-	-	-	291	152	V	
			* 5.440888	46.52	RMS	34.8	-34.6	0	46.72	54	-7.28	-	-	291	152	V	
	5700		5.725	59.65	Pk	34.9	-34.4	0	60.15	-	-	68.2	-8.05	315	164	H	
			5.725197	62.45	Pk	34.9	-34.3	0	63.05	-	-	68.2	-5.15	315	164	H	
			5.725	56.11	Pk	34.9	-34.4	0	56.61	-	-	68.2	-11.59	293	344	V	
			5.76665	58.27	Pk	35	-34.4	0	58.87	-	-	68.2	-9.33	293	344	V	
	5500	5	* 5.46	56.59	Pk	34.8	-34.7	0	56.69	-	-	68.2	-11.51	70	112	H	
			* 5.43411	58.28	Pk	34.8	-34.8	0	58.28	-	-	74	-15.72	70	112	H	
			5.47	62.23	Pk	34.8	-34.8	0	62.23	-	-	68.2	-5.97	70	112	H	
			5.468554	63.54	Pk	34.8	-34.7	0	63.64	-	-	68.2	-4.56	70	112	H	
			* 5.46	45.35	RMS	34.8	-34.7	0	45.45	54	-8.55	-	-	70	112	H	
			* 5.430866	46.5	RMS	34.8	-34.7	0	46.6	54	-7.4	-	-	70	112	H	
			5.47	45.47	RMS	34.8	-34.8	0	45.47	-	-	-	-	70	112	H	
			* 5.430866	46.5	RMS	34.8	-34.7	0	46.6	54	-7.4	-	-	70	112	H	
			* 5.46	55.76	Pk	34.8	-34.7	0	55.86	-	-	68.2	-12.34	157	209	V	
			* 5.454843	58.73	Pk	34.8	-34.6	0	58.93	-	-	74	-15.07	157	209	V	
			5.47	58.24	Pk	34.8	-34.8	0	58.24	-	-	68.2	-9.96	157	209	V	
			5.469821	60.13	Pk	34.8	-34.7	0	60.23	-	-	68.2	-7.97	157	209	V	
			* 5.46	44.98	RMS	34.8	-34.7	0	45.08	54	-8.92	-	-	157	209	V	
			* 5.418977	46.17	RMS	34.8	-34.6	0	46.37	54	-7.63	-	-	157	209	V	
			5.47	44.99	RMS	34.8	-34.8	0	44.99	-	-	-	-	157	209	V	
			* 5.418977	46.17	RMS	34.8	-34.6	0	46.37	54	-7.63	-	-	157	209	V	
	5700		5.725	59.17	Pk	34.9	-34.4	0	59.67	-	-	68.2	-8.53	214	101	H	
			5.72592	62.47	Pk	34.9	-34.3	0	63.07	-	-	68.2	-5.13	214	101	H	
			5.725	59.14	Pk	34.9	-34.4	0	59.64	-	-	68.2	-8.56	260	106	V	
			5.727194	61.46	Pk	34.9	-34.5	0	61.86	-	-	68.2	-6.34	260	106	V	
HT40	5510	6	* 5.46	60.86	Pk	34.8	-34.7	0	60.96	-	-	68.2	-7.24	285	280	H	
			* 5.458643	61.73	Pk	34.8	-34.8	0	61.73	-	-	74	-12.27	285	280	H	
			5.47	63.19	Pk	34.8	-34.8	0	63.19	-	-	68.2	-5.01	285	280	H	
			5.468799	63.36	Pk	34.8	-34.7	0	63.46	-	-	68.2	-4.74	285	280	H	
			* 5.46	45.09	RMS	34.8	-34.7	0	45.19	54	-8.81	-	-	285	280	H	
			* 5.396844	46.64	RMS	34.8	-34.8	0	46.64	54	-7.36	-	-	285	280	H	
			5.47	45.55	RMS	34.8	-34.8	0	45.55	-	-	-	-	285	280	H	
			* 5.396844	46.64	RMS	34.8	-34.8	0	46.64	54	-7.36	-	-	285	280	H	
			* 5.46	56.15	Pk	34.8	-34.7	0	56.25	-	-	68.2	-11.95	2	118	V	
			* 5.367533	58.29	Pk	34.8	-34.7	0	58.39	-	-	74	-15.61	2	118	V	
			5.47	56.65	Pk	34.8	-34.8	0	56.65	-	-	68.2	-11.55	2	118	V	
			5.46031	58.96	Pk	34.8	-34.7	0	59.06	-	-	68.2	-9.14	2	118	V	
			* 5.46	45.09	RMS	34.8	-34.7	0	45.19	54	-8.81	-	-	2	118	V	
			* 5.362644	46.21	RMS	34.8	-34.8	0	46.21	54	-7.79	-	-	2	118	V	
			5.47	44.89	RMS	34.8	-34.8	0	44.89	-	-	-	-	2	118	V	
			* 5.362644	46.21	RMS	34.8	-34.8	0	46.21	54	-7.79	-	-	2	118	V	
	5670		5.725	60.01	Pk	34.5	-35	0	59.51	-	-	68.2	-8.69	158	259	H	
			5.727573	63.66	Pk	34.5	-34.96	0	63.2	-	-	68.2	-5	158	259	H	
			5.725	56.05	Pk	34.5	-35	0	55.55	-	-	68.2	-12.65	135	319	V	
			5.810755	58.07	Pk	34.7	-34.6	0	58.17	-	-	68.2	-10.03	135	319	V	
	5510	5	* 5.46	57.03	Pk	34.3	-35.5	0	55.83	-	-	68.2	-12.37	97	211	H	
			* 5.459599	62.85	Pk	34.3	-35.54	0	61.61	-	-	74	-12.39	97	211	H	
			5.47	63.02	Pk	34.3	-35.6	0	61.72	-	-	68.2	-6.48	97	211	H	
			5.469221	64.42	Pk	34.3	-35.6	0	63.12	-	-	68.2	-5.08	97	211	H	
			* 5.46	45.5	RMS	34.3	-35.5	0	44.3	54	-9.7	-	-	97	211	H	
			* 5.390355	46.59	RMS	34.4	-35.4	0	45.59	54	-8.41	-	-	97	211	H	
			5.47	45.98	RMS	34.3	-35.6	0	44.68	-	-	-	-	97	211	H	
			* 5.390355	46.59	RMS	34.4	-35.4	0	45.59	54	-8.41	-	-	97	211	H	
			* 5.46	58.31	Pk	34.3	-35.5	0	57.11	-	-	68.2	-11.09	126	212	V	
			* 5.459932	60.74	Pk	34.3	-35.51	0	59.53	-	-	74	-14.47	126	212	V	
			5.47	58.47	Pk	34.3	-35.6	0	57.17	-	-	68.2	-11.03	126	212	V	
			5.469065	62.37	Pk	34.3	-35.6	0	61.07	-	-	68.2	-7.13	126	212	V	
			* 5.46	44.66	RMS	34.3	-35.5	0	43.46	54	-10.54	-	-	126	212	V	
			* 5.394511	45.91	RMS	34.4	-35.45	0	44.86	54	-9.14	-	-	126	212	V	
			5.47	45.32	RMS	34.3	-35.6	0	44.02	-	-	-	-	126	212	V	
			* 5.394511	45.91	RMS	34.4	-35.45	0	44.86	54	-9.14	-	-	126	212	V	
	5670		5.725	65.45	Pk	35.1	-38.19	0	62.36	-	-	68.2	-5.84	222	132	H	
			5.725007	65.86	Pk	35.1	-38.19	0	62.77	-	-	68.2	-5.43	222	132	H	
			5.725	64.51	Pk	35.1	-38.19	0	61.42	-	-	68.2	-6.78	188	184	V	
			5.72511	65.84	Pk	35.1	-38.19	0	62.75	-	-	68.2	-5.45	188	184	V	

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

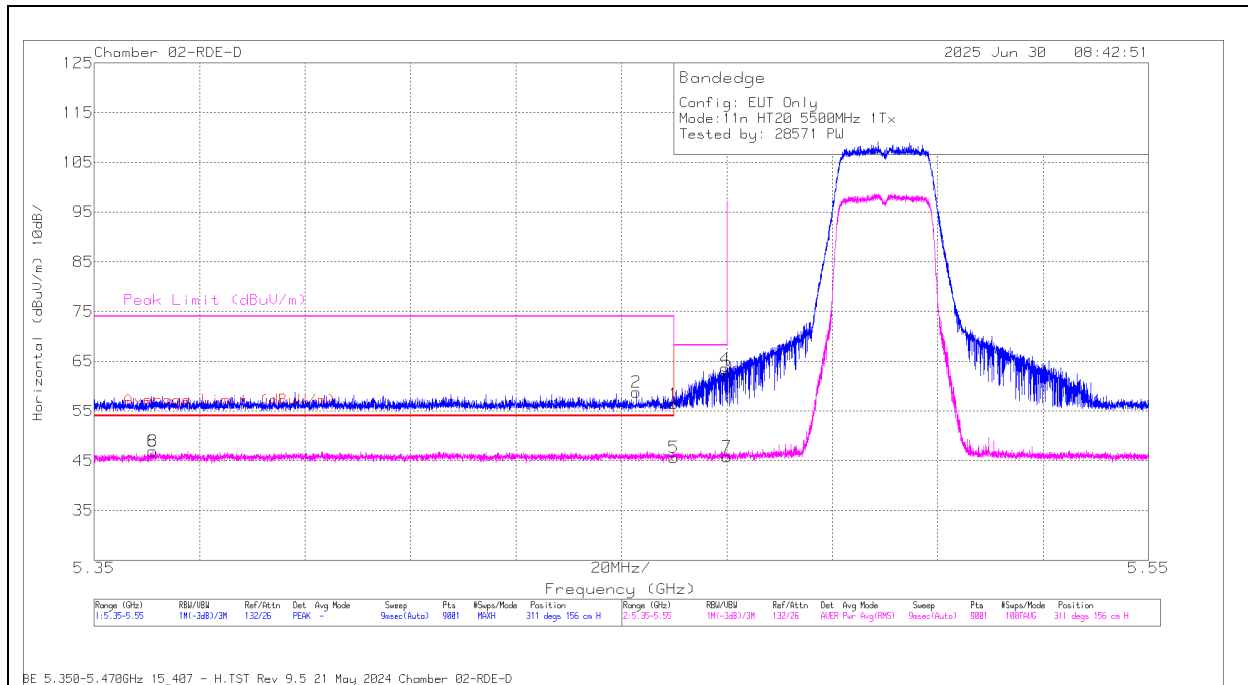
RMS - RMS detection

UNII-2c (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity			
VHT80	5530	6	* 5.46	58.93	Pk	34.6	-36.92	0	56.61	-	-	68.2	-11.59	117	259	H			
			* 5.458554	62.52	Pk	34.6	-36.93	0	60.19	-	-	74	-13.81	117	259	H			
			* 5.46	46.24	RMS	34.6	-36.92	0	43.92	54	-10.08	-	-	117	259	H			
			* 5.457866	47.36	RMS	34.6	-36.93	0	45.03	54	-8.97	-	-	117	259	H			
			* 5.457866	47.36	RMS	34.6	-36.93	0	45.03	54	-8.97	-	-	117	259	H			
			5.469443	65.49	Pk	34.6	-36.95	0	63.14	-	-	68.2	-5.06	117	259	H			
			5.47	63.14	Pk	34.6	-36.94	0	60.8	-	-	68.2	-7.4	117	259	H			
			5.47	46.71	RMS	34.6	-36.94	0	44.37	-	-	-	-	117	259	H			
			* 5.46	55.46	Pk	34.6	-36.92	0	53.14	-	-	68.2	-15.06	126	266	V			
			* 5.458977	58.35	Pk	34.6	-36.93	0	56.02	-	-	74	-17.98	126	266	V			
			* 5.46	45.96	RMS	34.6	-36.92	0	43.64	54	-10.36	-	-	126	266	V			
			* 5.459221	46.84	RMS	34.6	-36.93	0	44.51	54	-9.49	-	-	126	266	V			
			* 5.459221	46.84	RMS	34.6	-36.93	0	44.51	54	-9.49	-	-	126	266	V			
			5.468999	59.96	Pk	34.6	-36.96	0	57.6	-	-	68.2	-10.6	126	266	V			
			5.47	57.04	Pk	34.6	-36.94	0	54.7	-	-	68.2	-13.5	126	266	V			
			5.47	45.93	RMS	34.6	-36.94	0	43.59	-	-	-	-	126	266	V			
			5530	5	* 5.46	59.04	Pk	34.6	-36.92	0	56.72	-	-	68.2	-11.48	115	215	H	
					* 5.458466	62.36	Pk	34.6	-36.93	0	60.03	-	-	74	-13.97	115	215	H	
					* 5.46	47	RMS	34.6	-36.92	0	44.68	54	-9.32	-	-	115	215	H	
					* 5.45731	47.58	RMS	34.6	-36.95	0	45.23	54	-8.77	-	-	115	215	H	
					* 5.45731	47.58	RMS	34.6	-36.95	0	45.23	54	-8.77	-	-	115	215	H	
					5.468599	65.56	Pk	34.6	-36.96	0	63.2	-	-	68.2	-5	115	215	H	
					5.47	64.26	Pk	34.6	-36.94	0	61.92	-	-	68.2	-6.28	115	215	H	
					5.47	46.96	RMS	34.6	-36.94	0	44.62	-	-	-	-	115	215	H	
	* 5.46	55.9			Pk	34.6	-36.92	0	53.58	-	-	68.2	-14.62	205	177	V			
	* 5.455955	58.89			Pk	34.6	-36.99	0	56.5	-	-	74	-17.5	205	177	V			
	* 5.46	45.64			RMS	34.6	-36.92	0	43.32	54	-10.68	-	-	205	177	V			
	* 5.458243	46.75			RMS	34.6	-36.93	0	44.42	54	-9.58	-	-	205	177	V			
	* 5.458243	46.75			RMS	34.6	-36.93	0	44.42	54	-9.58	-	-	205	177	V			
	5.468665	62.3			Pk	34.6	-36.96	0	59.94	-	-	68.2	-8.26	205	177	V			
	5.47	60.06			Pk	34.6	-36.94	0	57.72	-	-	68.2	-10.48	205	177	V			
	5.47	46.5			RMS	34.6	-36.94	0	44.16	-	-	-	-	205	177	V			
	VHT160	5570 (Low BE)			6	* 5.46	64.09	Pk	34.8	-37.2	0	61.69	-	-	68.2	-6.51	195	168	H
						* 5.441844	69.07	Pk	34.8	-37.12	0	66.75	-	-	74	-7.25	195	168	H
						* 5.46	46.28	RMS	34.8	-37.2	0.1	43.98	54	-10.02	-	-	195	168	H
						* 5.443599	49.92	RMS	34.8	-37.1	0.1	47.72	54	-6.28	-	-	195	168	H
						* 5.443599	49.92	RMS	34.8	-37.1	0.1	47.72	54	-6.28	-	-	195	168	H
						5.461599	65.73	Pk	34.8	-37.2	0	63.33	-	-	68.2	-4.87	195	168	H
						5.47	61.04	Pk	34.8	-37	0	58.84	-	-	68.2	-9.36	195	168	H
						5.47	46.86	RMS	34.8	-37	0.1	44.76	-	-	-	-	195	168	H
			* 5.46	57.07		Pk	34.8	-37.2	0	54.67	-	-	68.2	-13.53	183	145	V		
			* 5.447132	62.17		Pk	34.8	-37.19	0	59.78	-	-	74	-14.22	183	145	V		
			* 5.46	46.04		RMS	34.8	-37.2	0.1	43.74	54	-10.26	-	-	183	145	V		
			* 5.3632	47.48		RMS	34.7	-37.32	0.1	44.96	54	-9.04	-	-	183	145	V		
			* 5.3632	47.48		RMS	34.7	-37.32	0.1	44.96	54	-9.04	-	-	183	145	V		
			5.467465	59.68		Pk	34.8	-37.15	0	57.33	-	-	68.2	-10.87	183	145	V		
			5.47	56.96		Pk	34.8	-37	0	54.76	-	-	68.2	-13.44	183	145	V		
			5.47	45.97		RMS	34.8	-37	0.1	43.87	-	-	-	-	183	145	V		
5570 (High BE)			5570 (High BE)	5.725		61.51	Pk	34.8	-36.16	0	60.15	-	-	68.2	-8.05	70	132	H	
				5.725492		63.19	Pk	34.8	-36.16	0	61.83	-	-	68.2	-6.37	70	132	H	
				5.725		63.19	Pk	34.8	-36.16	0	61.83	-	-	68.2	-6.37	29	190	V	
				5.726313		64.26	Pk	34.8	-36.17	0	62.89	-	-	68.2	-5.31	29	190	V	
			5570 (Low BE)	* 5.46		61.92	Pk	34.3	-35.5	0	60.72	-	-	68.2	-7.48	122	167	H	
				* 5.442244		69.33	Pk	34.3	-35.42	0	68.21	-	-	74	-5.79	122	167	H	
				5.47		59.38	Pk	34.3	-35.6	0	58.08	-	-	68.2	-10.12	122	167	H	
				5.467443		64.27	Pk	34.3	-35.6	0	62.97	-	-	68.2	-5.23	122	167	H	
		* 5.46		47.4	RMS	34.3	-35.5	0.1	46.3	54	-7.7	-	-	122	167	H			
		* 5.442288		50.71	RMS	34.3	-35.43	0.1	49.68	54	-4.32	-	-	122	167	H			
		5.47		47.4	RMS	34.3	-35.6	0.1	46.2	-	-	-	-	122	167	H			
		* 5.442288		50.71	RMS	34.3	-35.43	0.1	49.68	54	-4.32	-	-	122	167	H			
		* 5.46		57.48	Pk	34.3	-35.5	0	56.28	-	-	68.2	-11.92	161	158	V			
		* 5.443732		63.97	Pk	34.3	-35.43	0	62.84	-	-	74	-11.16	161	158	V			
		5.47		56.17	Pk	34.3	-35.6	0	54.87	-	-	68.2	-13.33	161	158	V			
		5.46311		60.98	Pk	34.3	-35.59	0	59.69	-	-	68.2	-8.51	161	158	V			
		* 5.46		45.62	RMS	34.3	-35.5	0.1	44.52	54	-9.48	-	-	161	158	V			
		* 5.445332		46.92	RMS	34.3	-35.5	0.1	45.82	54	-8.18	-	-	161	158	V			
		5.47		45.68	RMS	34.3	-35.6	0.1	44.48	-	-	-	-	161	158	V			
		* 5.445332		46.92	RMS	34.3	-35.5	0.1	45.82	54	-8.18	-	-	161	158	V			
		5570 (High BE)		5.725	63.83	Pk	34.8	-36.16	0	62.47	-	-	68.2	-5.73	281	125	H		
				5.725038	64.93	Pk	34.8	-36.16	0	63.54	-	-	68.2	-4.66	281	125	H		
				5.725	59.57	Pk	34.8	-36.16	0	58.21	-	-	68.2	-9.99	2	148	V		
				5.725237	61.34	Pk	34.8	-36.16	0	59.98	-	-	68.2	-8.22	2	148	V		

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

BANDEDGE (LOW CHANNEL / 5500MHz)**HORIZONTAL RESULT**

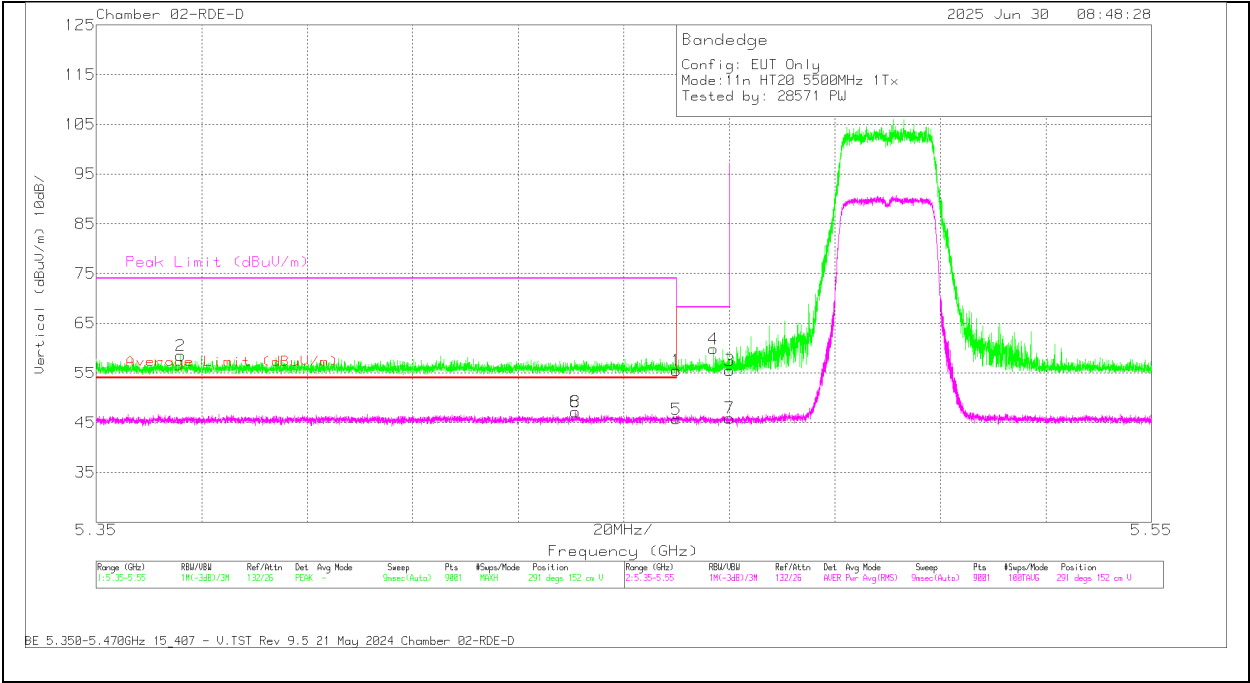
Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF (dB/m)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 5.46	56.35	Pk	34.8	-34.7	0	56.45	-	-	68.2	-11.75	311	156	H
8	* 5.452843	58.76	Pk	34.8	-34.8	0	58.76	-	-	74	-15.24	311	156	H
2	5.47	62	Pk	34.8	-34.8	0	62	-	-	68.2	-6.2	311	156	H
1	5.469643	63.41	Pk	34.8	-34.7	0	63.51	-	-	68.2	-4.69	311	156	H
5	* 5.46	45.14	RMS	34.8	-34.7	0	45.24	54	-8.76	-	-	311	156	H
4	* 5.361155	46.47	RMS	34.8	-34.8	0	46.47	54	-7.53	-	-	311	156	H
3	5.47	45.33	RMS	34.8	-34.8	0	45.33	-	-	-	-	311	156	H
7	* 5.361155	46.47	RMS	34.8	-34.8	0	46.47	54	-7.53	-	-	311	156	H

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5500MHz)

VERTICAL RESULT

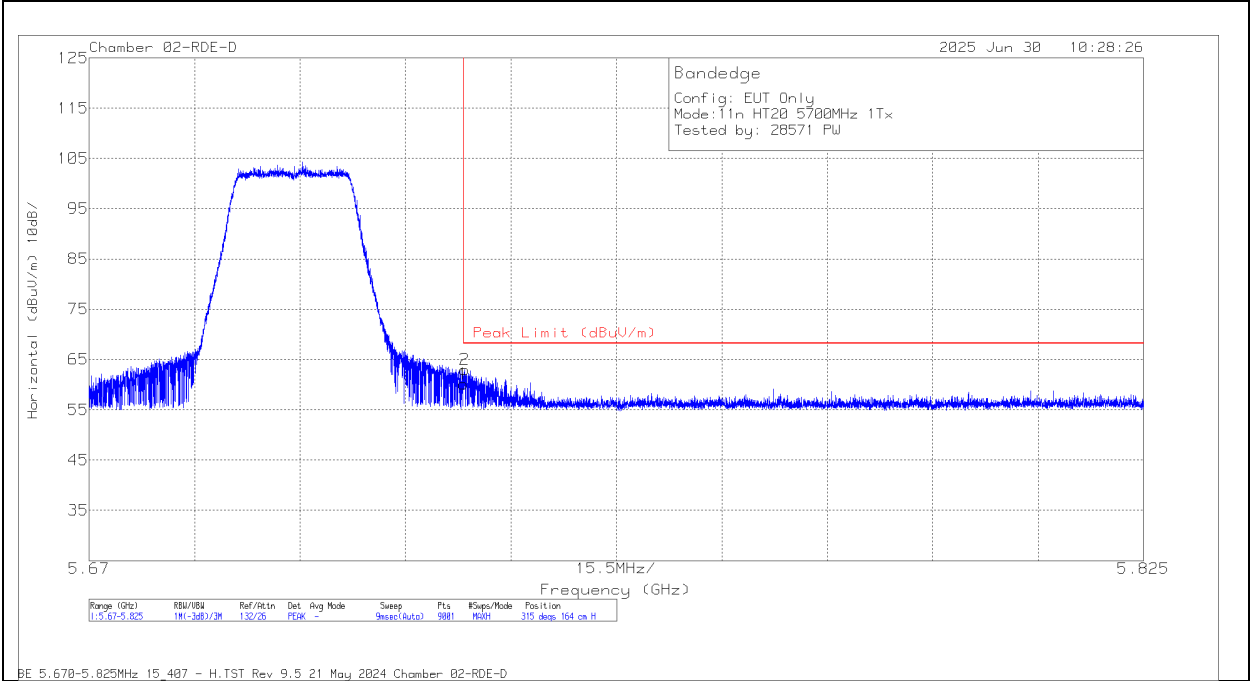


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF (dB/m)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.46	55.41	Pk	34.8	-34.7	0	55.51	-	-	68.2	-12.69	291	152	V
6	* 5.366044	58.57	Pk	34.8	-34.9	0	58.47	-	-	74	-15.53	291	152	V
8	5.47	55.48	Pk	34.8	-34.8	0	55.48	-	-	68.2	-12.72	291	152	V
1	5.466932	59.95	Pk	34.8	-34.9	0	59.85	-	-	68.2	-8.35	291	152	V
5	* 5.46	45.17	RMS	34.8	-34.7	0	45.27	54	-8.73	-	-	291	152	V
4	* 5.440888	46.52	RMS	34.8	-34.6	0	46.72	54	-7.28	-	-	291	152	V
3	5.47	45.45	RMS	34.8	-34.8	0	45.45	-	-	-	-	291	152	V
7	* 5.440888	46.52	RMS	34.8	-34.6	0	46.72	54	-7.28	-	-	291	152	V

Pk - Peak detector
RMS - RMS detection

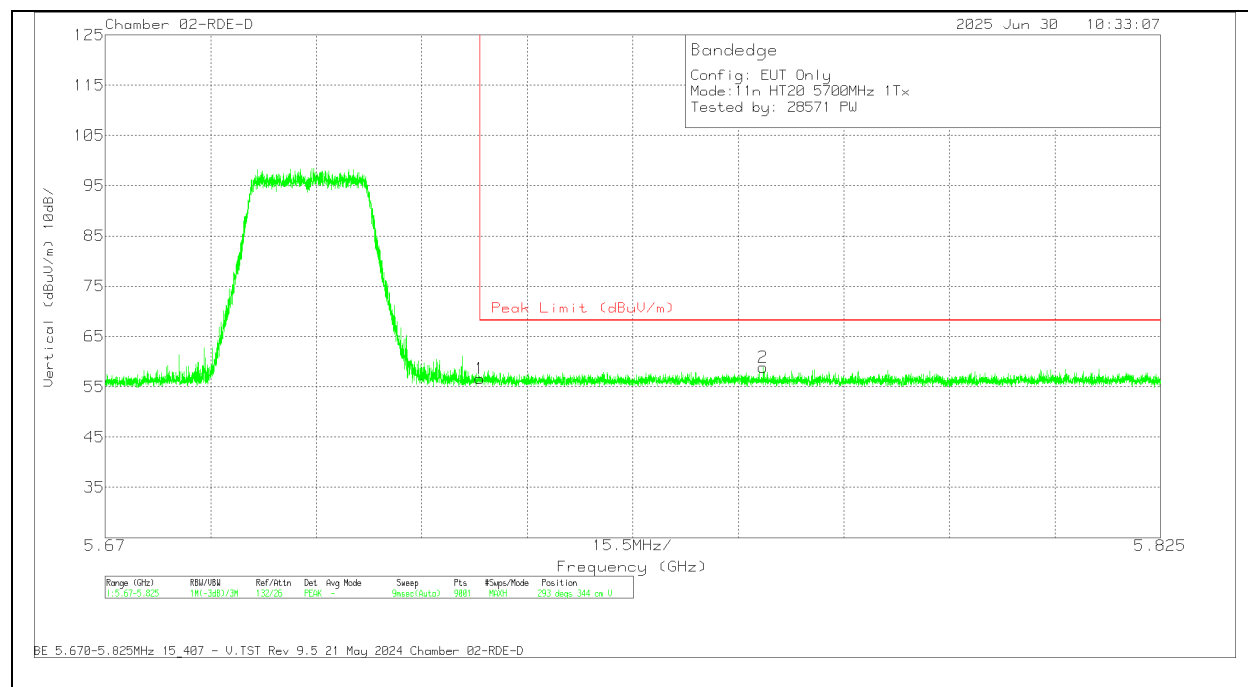
BANDEDGE (HIGH CHANNEL / 5700MHz)

HORIZONTAL RESULT



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF (dB/m)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	59.65	Pk	34.9	-34.4	0	60.15	-	-	68.2	-8.05	315
2	5.725197	62.45	Pk	34.9	-34.3	0	63.05	-	-	68.2	-5.15	315

Pk - Peak detector

BANDEDGE (HIGH CHANNEL / 5700MHz)**VERTICAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF (dB/m)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	56.11	Pk	34.9	-34.4	0	56.61	-	-	68.2	-11.59	293
2	5.76665	58.27	Pk	35	-34.4	0	58.87	-	-	68.2	-9.33	293

Pk - Peak detector

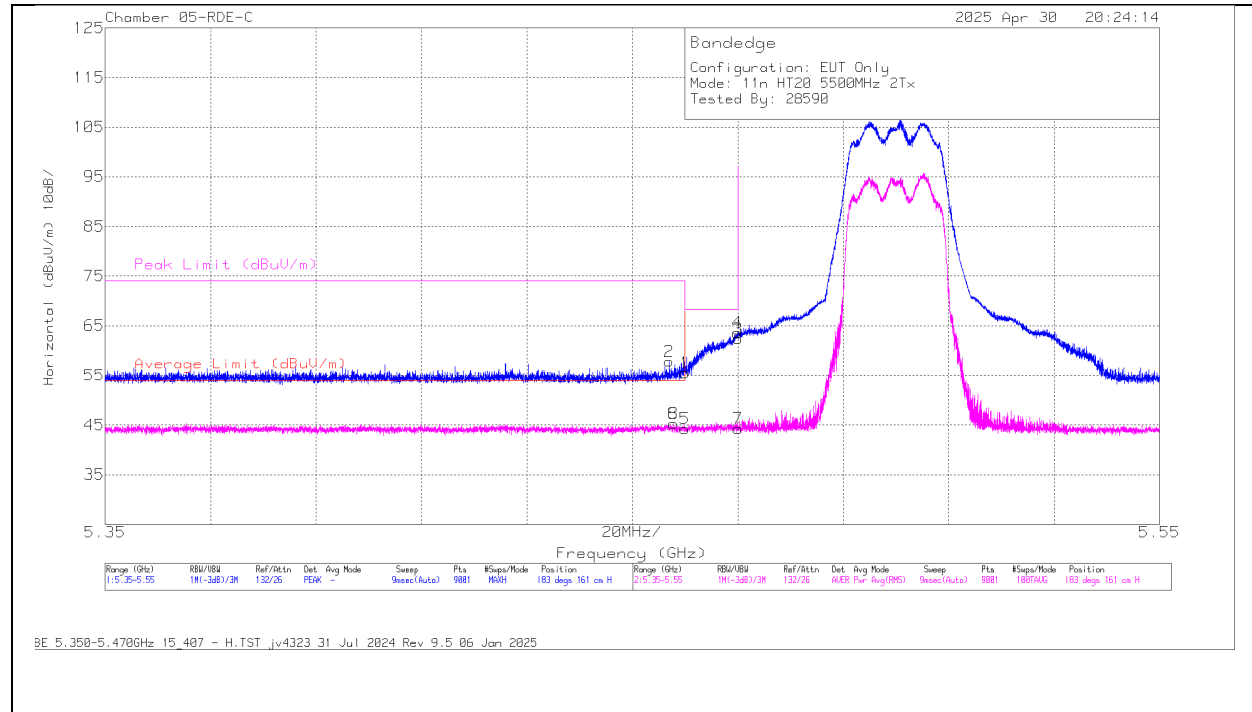
10.1.18. 802.11n/ac MIMO MODE IN UNII-2C BAND – BANDEDGES

UNII-2c (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity		
HT20	5500	6 + 5	* 5.457021	61.83	Pk	34.6	-38.6	0	57.83	-	-	74	-16.17	183	161	H		
			* 5.457821	48.95	RMS	34.6	-38.67	0	44.88	54	-9.12	-	-	183	161	H		
			* 5.457821	48.95	RMS	34.6	-38.67	0	44.88	54	-9.12	-	-	183	161	H		
			* 5.46	59.58	Pk	34.6	-38.71	0	55.47	-	-	68.2	-12.73	183	161	H		
			* 5.46	47.97	RMS	34.6	-38.71	0	43.86	54	-10.14	-	-	183	161	H		
			5.469932	67.59	Pk	34.6	-38.57	0	63.62	-	-	68.2	-4.58	183	161	H		
			5.47	66.34	Pk	34.6	-38.56	0	62.38	-	-	68.2	-5.82	183	161	H		
			5.47	47.84	RMS	34.6	-38.56	0	43.88	-	-	-	-	183	161	H		
			* 5.378377	49.3	RMS	34.6	-39.06	0	44.84	54	-9.16	-	-	229	313	V		
			* 5.378377	49.3	RMS	34.6	-39.06	0	44.84	54	-9.16	-	-	229	313	V		
	* 5.387644		61.36	Pk	34.6	-39.04	0	56.92	-	-	74	-17.08	229	313	V			
	* 5.46		58.12	Pk	34.6	-38.71	0	54.01	-	-	68.2	-14.19	229	313	V			
	* 5.46		47.96	RMS	34.6	-38.71	0	43.85	54	-10.15	-	-	229	313	V			
	5.469932		61.17	Pk	34.6	-38.57	0	57.2	-	-	68.2	-11	229	313	V			
	5.47		58.64	Pk	34.6	-38.56	0	54.68	-	-	68.2	-13.52	229	313	V			
	5.47		47.26	RMS	34.6	-38.56	0	43.3	-	-	-	-	229	313	V			
	5.725		65.55	Pk	34.7	-38.2	0	62.05	-	-	68.2	-6.15	169	264	H			
	5.726402		66.71	Pk	34.7	-38.26	0	63.15	-	-	68.2	-5.05	169	264	H			
	5.725		60.46	Pk	34.7	-38.2	0	56.96	-	-	68.2	-11.24	201	232	V			
	5.725283		62.3	Pk	34.7	-38.21	0	58.79	-	-	68.2	-9.41	201	232	V			
HT40	5510	6 + 5	* 5.455843	49.77	RMS	34.6	-38.59	0	45.78	54	-8.22	-	-	198	166	H		
			* 5.455843	49.77	RMS	34.6	-38.59	0	45.78	54	-8.22	-	-	198	166	H		
			* 5.459866	66.31	Pk	34.6	-38.71	0	62.2	-	-	74	-11.8	198	166	H		
			* 5.46	65.21	Pk	34.6	-38.71	0	61.1	-	-	68.2	-7.1	198	166	H		
			* 5.46	48.27	RMS	34.6	-38.71	0	44.16	54	-9.84	-	-	198	166	H		
			5.468488	67.62	Pk	34.6	-38.63	0	63.59	-	-	68.2	-4.61	198	166	H		
			5.47	67.06	Pk	34.6	-38.56	0	63.1	-	-	68.2	-5.1	198	166	H		
			5.47	48.16	RMS	34.6	-38.56	0	44.2	-	-	-	-	198	166	H		
			* 5.411599	48.88	RMS	34.6	-38.91	0	44.57	54	-9.43	-	-	195	182	V		
			* 5.411599	48.88	RMS	34.6	-38.91	0	44.57	54	-9.43	-	-	195	182	V		
	* 5.456243		62.36	Pk	34.6	-38.59	0	58.37	-	-	74	-15.63	195	182	V			
	* 5.46		60.15	Pk	34.6	-38.71	0	56.04	-	-	68.2	-12.16	195	182	V			
	* 5.46		47.69	RMS	34.6	-38.71	0	43.58	54	-10.42	-	-	195	182	V			
	5.469177		62.54	Pk	34.6	-38.63	0	58.51	-	-	68.2	-9.69	195	182	V			
	5.47		61.37	Pk	34.6	-38.56	0	57.41	-	-	68.2	-10.79	195	182	V			
	5.47		47.76	RMS	34.6	-38.56	0	43.8	-	-	-	-	195	182	V			
	5670		5.725	65.63	Pk	34.7	-38.2	0	62.13	-	-	68.2	-6.07	205	202	H		
			5.725507	67.15	Pk	34.7	-38.23	0	63.62	-	-	68.2	-4.58	205	202	H		
			5.725	58.43	Pk	34.7	-38.2	0	54.93	-	-	68.2	-13.27	192	198	V		
			5.726299	62.81	Pk	34.7	-38.26	0	59.25	-	-	68.2	-8.95	192	198	V		
VHT80		5530	6 + 5	* 5.456554	49.33	RMS	34.6	-38.6	0	45.33	54	-8.67	-	-	208	163	H	
				* 5.456554	49.33	RMS	34.6	-38.6	0	45.33	54	-8.67	-	-	208	163	H	
	* 5.459443			64.61	Pk	34.6	-38.73	0	60.48	-	-	74	-13.52	208	163	H		
	* 5.46			63.09	Pk	34.6	-38.71	0	58.98	-	-	68.2	-9.22	208	163	H		
	* 5.46			48.85	RMS	34.6	-38.71	0	44.74	54	-9.26	-	-	208	163	H		
	5.465154			66.85	Pk	34.6	-38.74	0	62.71	-	-	68.2	-5.49	208	163	H		
	5.47			65.84	Pk	34.6	-38.56	0	61.88	-	-	68.2	-6.32	208	163	H		
	5.47			49.13	RMS	34.6	-38.56	0	45.17	-	-	-	-	208	163	H		
	* 5.364689			61.23	Pk	34.6	-38.99	0	56.84	-	-	74	-17.16	245	163	V		
	* 5.366222			49.15	RMS	34.6	-39.02	0	44.73	54	-9.27	-	-	245	163	V		
	* 5.366222	49.15		RMS	34.6	-39.02	0	44.73	54	-9.27	-	-	245	163	V			
	* 5.46	59.02		Pk	34.6	-38.71	0	54.91	-	-	68.2	-13.29	245	163	V			
	* 5.46	47.26		RMS	34.6	-38.71	0	43.15	54	-10.85	-	-	245	163	V			
	5.463621	60.58		Pk	34.6	-38.7	0	56.48	-	-	68.2	-11.72	245	163	V			
	5.47	58.23		Pk	34.6	-38.56	0	54.27	-	-	68.2	-13.93	245	163	V			
	5.47	47.8		RMS	34.6	-38.56	0	43.84	-	-	-	-	245	163	V			
	VHT160	5570 (Low BE)		6 + 5	* 5.46	63.35	Pk	34.3	-35.5	0	62.15	-	-	68.2	-6.05	139	219	H
					* 5.440066	69.18	Pk	34.3	-35.5	0	67.98	-	-	74	-6.02	139	219	H
					5.47	61.19	Pk	34.3	-35.6	0	59.89	-	-	68.2	-8.31	139	219	H
					5.466732	64.48	Pk	34.3	-35.6	0	63.18	-	-	68.2	-5.02	139	219	H
* 5.46			46.29		RMS	34.3	-35.5	0.1	45.19	54	-8.81	-	-	139	219	H		
* 5.449888			48.34		RMS	34.3	-35.41	0.1	47.33	54	-6.67	-	-	139	219	H		
5.47			46.89		RMS	34.3	-35.6	0.1	45.69	-	-	-	-	139	219	H		
* 5.449888			48.34		RMS	34.3	-35.41	0.1	47.33	54	-6.67	-	-	139	219	H		
* 5.46			55.76		Pk	34.3	-35.5	0	54.56	-	-	68.2	-13.64	178	150	V		
* 5.442977			62.28		Pk	34.3	-35.5	0	61.08	-	-	74	-12.92	178	150	V		
5.47		56.9	Pk		34.3	-35.6	0	55.6	-	-	68.2	-12.6	178	150	V			
5.462443		58.9	Pk		34.3	-35.6	0	57.6	-	-	68.2	-10.6	178	150	V			
* 5.46		45.65	RMS		34.3	-35.5	0.1	44.55	54	-9.45	-	-	178	150	V			
* 5.447399		47.03	RMS		34.3	-35.44	0.1	45.99	54	-8.01	-	-	178	150	V			
5.47		45.57	RMS		34.3	-35.6	0.1	44.37	-	-	-	-	178	150	V			
* 5.447399		47.03	RMS		34.3	-35.44	0.1	45.99	54	-8.01	-	-	178	150	V			
VHT160	5570 (High BE)	6 + 5	5.725	62.35	Pk	34.8	0	-36.16	60.99	-	-	68.2	-7.21	43	119	H		
			5.72569	64.78	Pk	34.8	0	-36.16	63.42	-	-	68.2	-4.78	43	119	H		
			5.725	63.87	Pk	34.8	0	-36.16	62.51	-	-	68.2	-5.69	28	239	V		
			5.725095	64.96	Pk	34.8	0	-36.16	63.6	-	-	68.2	-4.6	28	239	V		

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

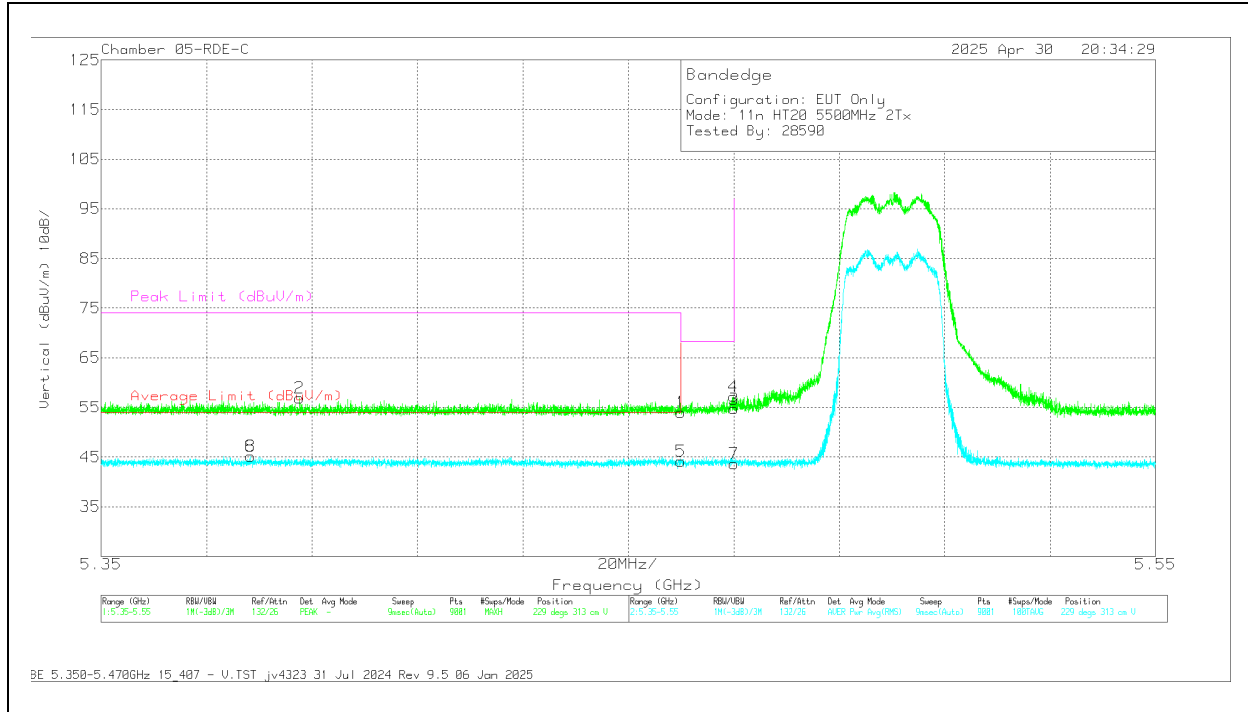
RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5500MHz)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.457021	61.83	Pk	34.6	-38.6	0	57.83	-	-	74	-16.17	183	161	H
6	* 5.457821	48.95	RMS	34.6	-38.67	0	44.88	54	-9.12	-	-	183	161	H
8	* 5.457821	48.95	RMS	34.6	-38.67	0	44.88	54	-9.12	-	-	183	161	H
1	* 5.46	59.58	Pk	34.6	-38.71	0	55.47	-	-	68.2	-12.73	183	161	H
5	* 5.46	47.97	RMS	34.6	-38.71	0	43.86	54	-10.14	-	-	183	161	H
4	5.469932	67.59	Pk	34.6	-38.57	0	63.62	-	-	68.2	-4.58	183	161	H
3	5.47	66.34	Pk	34.6	-38.56	0	62.38	-	-	68.2	-5.82	183	161	H
7	5.47	47.84	RMS	34.6	-38.56	0	43.88	-	-	-	-	183	161	H

Pk - Peak detector

RMS - RMS detection

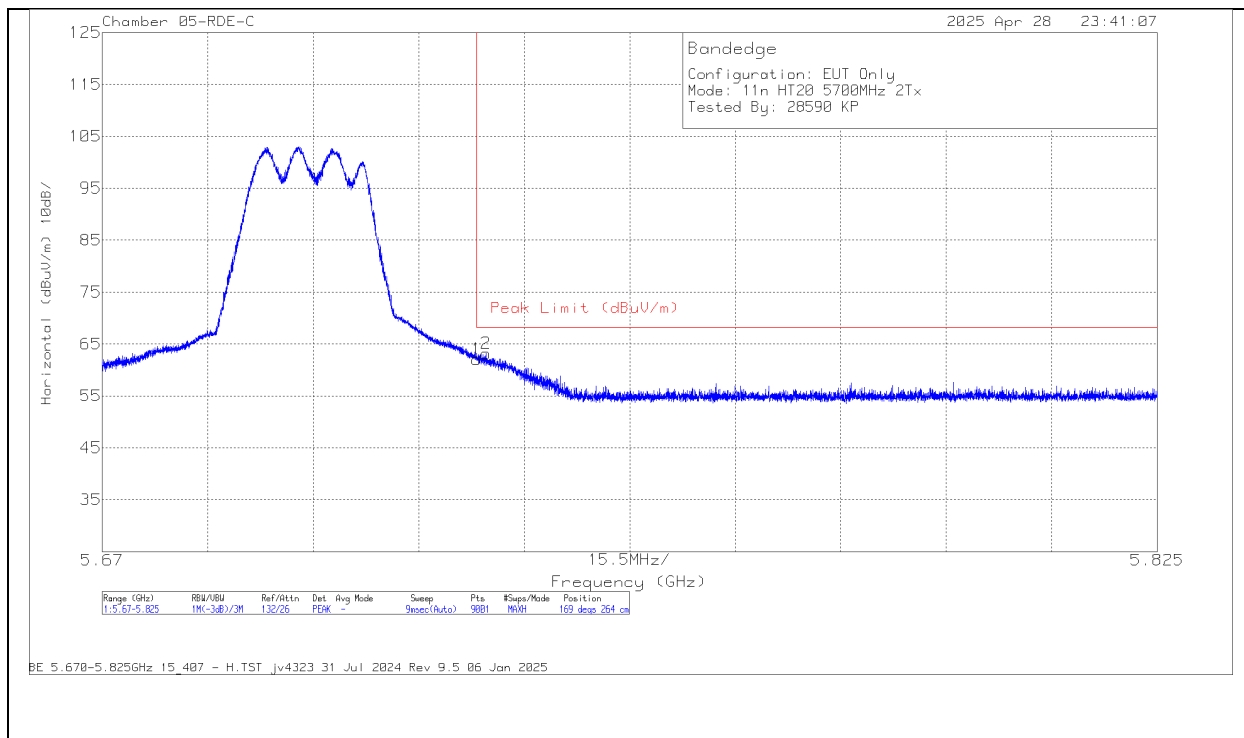
BANDEDGE (LOW CHANNEL / 5500MHz)**VERTICAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 5.378377	49.3	RMS	34.6	-39.06	0	44.84	54	-9.16	-	-	229	313	V
8	* 5.378377	49.3	RMS	34.6	-39.06	0	44.84	54	-9.16	-	-	229	313	V
2	* 5.387644	61.36	Pk	34.6	-39.04	0	56.92	-	-	74	-17.08	229	313	V
1	* 5.46	58.12	Pk	34.6	-38.71	0	54.01	-	-	68.2	-14.19	229	313	V
5	* 5.46	47.96	RMS	34.6	-38.71	0	43.85	54	-10.15	-	-	229	313	V
4	5.469932	61.17	Pk	34.6	-38.57	0	57.2	-	-	68.2	-11	229	313	V
3	5.47	58.64	Pk	34.6	-38.56	0	54.68	-	-	68.2	-13.52	229	313	V
7	5.47	47.26	RMS	34.6	-38.56	0	43.3	-	-	-	-	229	313	V

Pk - Peak detector

RMS - RMS detection

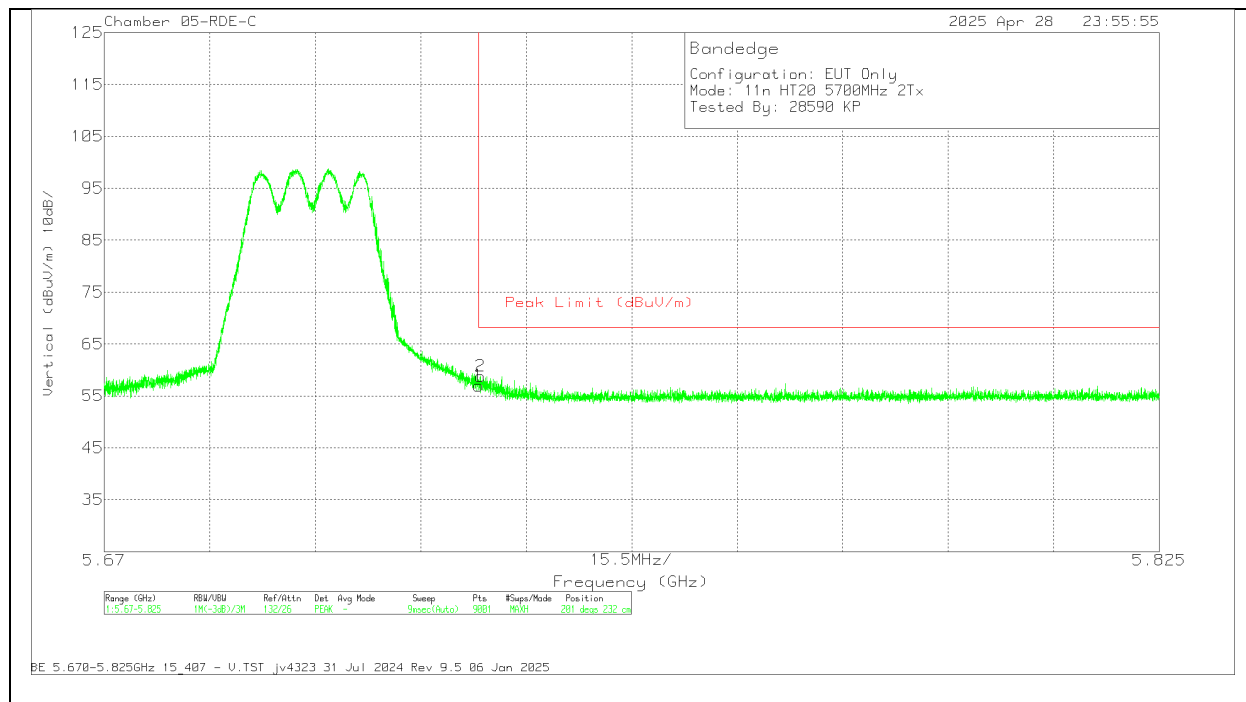
BANDEDGE (HIGH CHANNEL / 5700MHz) HORIZONTAL RESULT



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	65.55	Pk	34.7	0	-38.2	62.05	68.2	-6.15	169	264	H
2	5.726402	66.71	Pk	34.7	0	-38.26	63.15	68.2	-5.05	169	264	H

Pk - Peak detector

BANDEDGE (HIGH CHANNEL / 5700MHz) VERTICALL RESULT



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	60.46	Pk	34.7	0	-38.2	56.96	68.2	-11.24	201	232	V
2	5.725263	62.3	Pk	34.7	0	-38.21	56.79	68.2	-9.41	201	232	V

Pk - Peak detector

10.1.19. 802.11be SISO SU MODE IN UNII-2C BAND – BANDEDGES

UNII-2c (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	5500	6	* 5.46	58.6	Pk	34.3	-35.5	0	57.4	-	-	68.2	-10.8	138	139	H
			* 5.458643	60.64	Pk	34.3	-35.6	0	59.34	-	-	74	-14.66	138	139	H
			5.47	63.8	Pk	34.3	-35.6	0	62.5	-	-	68.2	-5.7	138	139	H
			5.469577	64.58	Pk	34.3	-35.6	0	63.28	-	-	68.2	-4.92	138	139	H
			* 5.46	45.63	RMS	34.3	-35.5	0	44.43	54	-9.57	-	-	138	139	H
			* 5.407288	46.45	RMS	34.4	-35.5	0	45.35	54	-8.65	-	-	138	139	H
			5.47	46.66	RMS	34.3	-35.6	0	45.36	-	-	-	-	138	139	H
			* 5.407288	46.45	RMS	34.4	-35.5	0	45.35	54	-8.65	-	-	138	139	H
			* 5.46	56.62	Pk	34.3	-35.5	0	55.42	-	-	68.2	-12.78	131	199	V
			* 5.422644	58.32	Pk	34.4	-35.66	0	57.06	-	-	74	-16.94	131	199	V
			5.47	56.11	Pk	34.3	-35.6	0	54.81	-	-	68.2	-13.39	131	199	V
			5.468199	59.01	Pk	34.3	-35.6	0	57.71	-	-	68.2	-10.49	131	199	V
			* 5.46	45.26	RMS	34.3	-35.5	0	44.06	54	-9.94	-	-	131	199	V
			* 5.400977	46.21	RMS	34.4	-35.5	0	45.11	54	-8.89	-	-	131	199	V
			5.47	44.78	RMS	34.3	-35.6	0	43.48	-	-	-	-	131	199	V
			* 5.400977	46.21	RMS	34.4	-35.5	0	45.11	54	-8.89	-	-	131	199	V
	5700	5.725	62.23	Pk	34.5	-35	0	61.73	-	-	68.2	-6.47	153	179	H	
		5.726109	63.67	Pk	34.5	-34.99	0	63.18	-	-	68.2	-5.02	153	179	H	
		5.725	55.56	Pk	34.5	-35	0	55.06	-	-	68.2	-13.14	120	212	V	
		5.822983	57.88	Pk	34.7	-34.6	0	57.98	-	-	68.2	-10.22	120	212	V	
	5500	5	* 5.46	56.99	Pk	34.8	-34.7	0	57.09	-	-	68.2	-11.11	284	167	H
			* 5.41471	58.96	Pk	34.8	-34.6	0	59.16	-	-	74	-14.84	284	167	H
			5.47	61.13	Pk	34.8	-34.8	0	61.13	-	-	68.2	-7.07	284	167	H
			5.469199	63.31	Pk	34.8	-34.6	0	63.51	-	-	68.2	-4.69	284	167	H
			* 5.46	45.18	RMS	34.8	-34.7	0	45.28	54	-8.72	-	-	284	167	H
			* 5.42831	46.5	RMS	34.8	-34.8	0	46.5	54	-7.5	-	-	284	167	H
			5.47	45.73	RMS	34.8	-34.8	0	45.73	-	-	-	-	284	167	H
			* 5.42831	46.5	RMS	34.8	-34.8	0	46.5	54	-7.5	-	-	284	167	H
			* 5.46	54.58	Pk	34.8	-34.7	0	54.68	-	-	68.2	-13.52	269	125	V
			* 5.43391	58.22	Pk	34.8	-34.8	0	58.22	-	-	74	-15.78	269	125	V
			5.47	56.51	Pk	34.8	-34.8	0	56.51	-	-	68.2	-11.69	269	125	V
			5.468777	57.64	Pk	34.8	-34.7	0	57.74	-	-	68.2	-10.46	269	125	V
* 5.46			45.68	RMS	34.8	-34.7	0	45.78	54	-8.22	-	-	269	125	V	
* 5.417533			46.22	RMS	34.8	-34.6	0	46.42	54	-7.58	-	-	269	125	V	
5.47			44.93	RMS	34.8	-34.8	0	44.93	-	-	-	-	269	125	V	
* 5.417533			46.22	RMS	34.8	-34.6	0	46.42	54	-7.58	-	-	269	125	V	
5700			5.725	60.23	Pk	34.9	-34.4	0	60.73	-	-	68.2	-7.47	296	182	H
			5.725007	62.46	Pk	34.9	-34.3	0	63.06	-	-	68.2	-5.14	296	182	H
			5.725	56.15	Pk	34.9	-34.4	0	56.65	-	-	68.2	-11.55	274	265	V
			5.770783	57.98	Pk	35	-34.4	0	58.58	-	-	68.2	-9.62	274	265	V
EHT40 (SU Mode)	5510	6	* 5.46	60.46	Pk	34.8	-34.7	0	60.56	-	-	68.2	-7.64	108	178	H
			* 5.458199	61.5	Pk	34.8	-34.8	0	61.5	-	-	74	-12.5	108	178	H
			5.47	61.63	Pk	34.8	-34.8	0	61.63	-	-	68.2	-6.57	108	178	H
			5.465466	63.14	Pk	34.8	-34.6	0	63.34	-	-	68.2	-4.86	108	178	H
			* 5.46	45.55	RMS	34.8	-34.7	0	45.65	54	-8.35	-	-	108	178	H
			* 5.447399	46.15	RMS	34.8	-34.6	0	46.35	54	-7.65	-	-	108	178	H
			5.47	45.34	RMS	34.8	-34.8	0	45.34	-	-	-	-	108	178	H
			* 5.447399	46.15	RMS	34.8	-34.6	0	46.35	54	-7.65	-	-	108	178	H
			* 5.46	55.85	Pk	34.8	-34.7	0	55.95	-	-	68.2	-12.25	95	182	V
			* 5.440932	58.37	Pk	34.8	-34.6	0	58.57	-	-	74	-15.43	95	182	V
			5.47	57.88	Pk	34.8	-34.8	0	57.88	-	-	68.2	-10.32	95	182	V
			5.468865	59.59	Pk	34.8	-34.6	0	59.79	-	-	68.2	-8.41	95	182	V
			* 5.46	45.53	RMS	34.8	-34.7	0	45.63	54	-8.37	-	-	95	182	V
			* 5.396955	46.16	RMS	34.8	-34.7	0	46.26	54	-7.74	-	-	95	182	V
			5.47	44.98	RMS	34.8	-34.8	0	44.98	-	-	-	-	95	182	V
			* 5.396955	46.16	RMS	34.8	-34.7	0	46.26	54	-7.74	-	-	95	182	V
	5670	5.725	59.12	Pk	34.9	-34.4	0	59.62	-	-	68.2	-8.58	110	160	H	
		5.725024	62.88	Pk	34.9	-34.3	0	63.48	-	-	68.2	-4.72	110	160	H	
		5.725	55.81	Pk	34.9	-34.4	0	56.31	-	-	68.2	-11.89	86	307	V	
		5.812202	58.52	Pk	35.1	-34.4	0	59.22	-	-	68.2	-8.98	86	307	V	
	5510	5	* 5.46	58.66	Pk	34.8	-34.7	0	58.76	-	-	68.2	-9.44	166	196	H
			* 5.459954	61.12	Pk	34.8	-34.7	0	61.22	-	-	74	-12.78	166	196	H
			5.47	60.95	Pk	34.8	-34.8	0	60.95	-	-	68.2	-7.25	166	196	H
			5.469865	62.23	Pk	34.8	-34.7	0	62.33	-	-	68.2	-5.87	166	196	H
			* 5.46	45.59	RMS	34.8	-34.7	0	45.69	54	-8.31	-	-	166	196	H
			* 5.426533	46.4	RMS	34.8	-34.8	0	46.4	54	-7.6	-	-	166	196	H
			5.47	45.51	RMS	34.8	-34.8	0	45.51	-	-	-	-	166	196	H
			* 5.426533	46.4	RMS	34.8	-34.8	0	46.4	54	-7.6	-	-	166	196	H
			* 5.46	60.38	Pk	34.8	-34.7	0	60.48	-	-	68.2	-7.72	144	261	V
			* 5.458799	61.37	Pk	34.8	-34.7	0	61.47	-	-	74	-12.53	144	261	V
			5.47	61.13	Pk	34.8	-34.8	0	61.13	-	-	68.2	-7.07	144	261	V
			5.46991	63.1	Pk	34.8	-34.7	0	63.2	-	-	68.2	-5	144	261	V
* 5.46			44.72	RMS	34.8	-34.7	0	44.82	54	-9.18	-	-	144	261	V	
* 5.401222			46.38	RMS	34.8	-34.8	0	46.38	54	-7.62	-	-	144	261	V	
5.47			46.1	RMS	34.8	-34.8	0	46.1	-	-	-	-	144	261	V	
* 5.401222			46.38	RMS	34.8	-34.8	0	46.38	54	-7.62	-	-	144	261	V	
5670			5.725	59.38	Pk	34.5	-32.8	0	61.08	-	-	68.2	-7.12	347	134	H
			5.725076	61.58	Pk	34.5	-32.8	0	63.28	-	-	68.2	-4.92	347	134	H
	5.725	59.84	Pk	34.5	-32.8	0	61.54	-	-	68.2	-6.66	320	144	V		
	5.725128	61.03	Pk	34.5	-32.8	0	62.73	-	-	68.2	-5.47	320	144	V		

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

UNII-2c (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 (SU Mode)	5530	6	* 5.46	61.83	Pk	34.6	-36.92	0	59.51	-	-	68.2	-8.69	158	145	H
			* 5.457954	64.22	Pk	34.6	-36.93	0	61.89	-	-	74	-12.11	158	145	H
			* 5.46	46.43	RMS	34.6	-36.92	0	44.11	54	-9.89	-	-	158	145	H
			* 5.45691	47.58	RMS	34.6	-36.96	0	45.22	54	-8.78	-	-	158	145	H
			* 5.45691	47.58	RMS	34.6	-36.96	0	45.22	54	-8.78	-	-	158	145	H
			5.464621	65.93	Pk	34.6	-36.94	0	63.59	-	-	68.2	-4.61	158	145	H
			5.47	63.97	Pk	34.6	-36.94	0	61.63	-	-	68.2	-6.57	158	145	H
			5.47	47.44	RMS	34.6	-36.94	0	45.1	-	-	-	-	158	145	H
			* 5.46	56.27	Pk	34.6	-36.92	0	53.95	-	-	68.2	-14.25	135	207	V
			* 5.430221	58.91	Pk	34.6	-37	0	56.51	-	-	74	-17.49	135	207	V
			* 5.46	46.02	RMS	34.6	-36.92	0	43.7	54	-10.3	-	-	135	207	V
			* 5.452399	46.87	RMS	34.6	-37	0	44.47	54	-9.53	-	-	135	207	V
			* 5.452399	46.87	RMS	34.6	-37	0	44.47	54	-9.53	-	-	135	207	V
			5.464488	58.38	Pk	34.6	-36.94	0	56.04	-	-	68.2	-12.16	135	207	V
			5.47	56.41	Pk	34.6	-36.94	0	54.07	-	-	68.2	-14.13	135	207	V
			5.47	45.76	RMS	34.6	-36.94	0	43.42	-	-	-	-	135	207	V
	5610		5.725	62.63	Pk	35.1	-38.19	0	59.54	-	-	68.2	-8.66	205	157	H
			5.72511	66.36	Pk	35.1	-38.19	0	63.27	-	-	68.2	-4.93	205	157	H
			5.725	57.86	Pk	35.1	-38.19	0	54.77	-	-	68.2	-13.43	178	161	V
			5.751822	60	Pk	35.1	-38.09	0	57.01	-	-	68.2	-11.19	178	161	V
	5530	5	* 5.46	62.9	Pk	34.8	-37.2	0	60.5	-	-	68.2	-7.7	234	105	H
			* 5.457088	63.66	Pk	34.8	-37.29	0	61.17	-	-	74	-12.83	234	105	H
			* 5.46	47.99	RMS	34.8	-37.2	0	45.59	54	-8.41	-	-	234	105	H
			* 5.456154	48.47	RMS	34.8	-37.3	0	45.97	54	-8.03	-	-	234	105	H
			* 5.456154	48.47	RMS	34.8	-37.3	0	45.97	54	-8.03	-	-	234	105	H
			5.465932	65.48	Pk	34.8	-37.19	0	63.09	-	-	68.2	-5.11	234	105	H
			5.47	59.31	Pk	34.8	-37	0	57.11	-	-	68.2	-11.09	234	105	H
			5.47	47.63	RMS	34.8	-37	0	45.43	-	-	-	-	234	105	H
			* 5.46	57.17	Pk	34.8	-37.2	0	54.77	-	-	68.2	-13.43	91	301	V
			* 5.457066	60.65	Pk	34.8	-37.29	0	58.16	-	-	74	-15.84	91	301	V
			* 5.46	46.54	RMS	34.8	-37.2	0	44.14	54	-9.86	-	-	91	301	V
			* 5.45931	47.78	RMS	34.8	-37.2	0	45.38	54	-8.62	-	-	91	301	V
			* 5.45931	47.78	RMS	34.8	-37.2	0	45.38	54	-8.62	-	-	91	301	V
			5.467399	61.87	Pk	34.8	-37.16	0	59.51	-	-	68.2	-8.69	91	301	V
			5.47	57.78	Pk	34.8	-37	0	55.58	-	-	68.2	-12.62	91	301	V
			5.47	46.4	RMS	34.8	-37	0	44.2	-	-	-	-	91	301	V
	5610		5.725	60.61	Pk	35.1	-38.19	0	57.52	-	-	68.2	-10.68	210	152	H
			5.731052	63.47	Pk	35.1	-38.3	0	60.27	-	-	68.2	-7.93	210	152	H
			5.725	62.89	Pk	35.1	-38.19	0	59.8	-	-	68.2	-8.4	214	195	V
			5.725007	64.24	Pk	35.1	-38.19	0	61.15	-	-	68.2	-7.05	214	195	V
EHT160 (SU Mode)	5570 (Low BE)	6	5.446599	50.69	RMS	34.6	-38.91	0.14	46.52	54	-7.48	-	-	26	150	H
			5.446599	50.69	RMS	34.6	-38.91	0.14	46.52	54	-7.48	-	-	26	150	H
			5.459154	67.61	Pk	34.6	-38.74	0	63.47	-	-	74	-10.53	26	150	H
			5.46	60.34	Pk	34.6	-38.71	0	56.23	-	-	68.2	-11.97	26	150	H
			5.46	48.34	RMS	34.6	-38.71	0.14	44.37	54	-9.63	-	-	26	150	H
			5.465399	67.18	Pk	34.6	-38.73	0	63.05	-	-	68.2	-5.15	26	150	H
			5.47	60.37	Pk	34.6	-38.56	0	56.41	-	-	68.2	-11.79	26	150	H
			5.47	48.95	RMS	34.6	-38.56	0.14	45.13	-	-	-	-	26	150	H
			5.431933	49.39	RMS	34.5	-38.71	0.14	45.32	54	-8.68	-	-	12	140	V
			5.431933	49.39	RMS	34.5	-38.71	0.14	45.32	54	-8.68	-	-	12	140	V
			5.434021	62.76	Pk	34.5	-38.8	0	58.46	-	-	74	-15.54	12	140	V
			5.46	59.44	Pk	34.6	-38.71	0	55.33	-	-	68.2	-12.87	12	140	V
			5.46	47.93	RMS	34.6	-38.71	0.14	43.96	54	-10.04	-	-	12	140	V
			5.469732	60.62	Pk	34.6	-38.58	0	56.64	-	-	68.2	-11.56	12	140	V
			5.47	57.96	Pk	34.6	-38.56	0	54	-	-	68.2	-14.2	12	140	V
			5.47	48.4	RMS	34.6	-38.56	0.14	44.58	-	-	-	-	12	140	V
	5570 (High BE)		5.725	60.29	Pk	34.8	-34.1	0	60.99	-	-	68.2	-7.21	58	168	H
			5.727918	62.5	Pk	34.8	-34.1	0	63.2	-	-	68.2	-5	58	168	H
			5.725	50.09	Pk	34.8	-34.1	0	50.79	-	-	68.2	-17.41	124	153	V
			5.728112	52.31	Pk	34.8	-34.1	0	53.01	-	-	68.2	-15.19	124	153	V
	5570 (Low BE)	5	5.456177	66.27	Pk	34.6	-38.59	0	62.28	-	-	74	-11.72	9	157	H
			5.45711	49.24	RMS	34.6	-38.61	0.14	45.37	54	-8.63	-	-	9	157	H
			5.45711	49.24	RMS	34.6	-38.61	0.14	45.37	54	-8.63	-	-	9	157	H
			5.46	59.56	Pk	34.6	-38.71	0	55.45	-	-	68.2	-12.75	9	157	H
			5.46	48.47	RMS	34.6	-38.71	0.14	44.5	54	-9.5	-	-	9	157	H
			5.469888	66.8	Pk	34.6	-38.57	0	62.83	-	-	68.2	-5.37	9	157	H
			5.47	59.17	Pk	34.6	-38.56	0	55.21	-	-	68.2	-12.99	9	157	H
			5.47	48.32	RMS	34.6	-38.56	0.14	44.5	-	-	-	-	9	157	H
			5.425399	61.19	Pk	34.5	-38.66	0	57.03	-	-	74	-16.97	4	151	V
			5.45631	48.48	RMS	34.6	-38.59	0.14	44.63	54	-9.37	-	-	4	151	V
			5.45631	48.48	RMS	34.6	-38.59	0.14	44.63	54	-9.37	-	-	4	151	V
			5.46	59.84	Pk	34.6	-38.71	0	55.73	-	-	68.2	-12.47	4	151	V
			5.46	47.54	RMS	34.6	-38.71	0.14	43.57	54	-10.43	-	-	4	151	V
			5.465154	60.43	Pk	34.6	-38.74	0	56.29	-	-	68.2	-11.91	4	151	V
			5.47	58.37	Pk	34.6	-38.56	0	54.41	-	-	68.2	-13.79	4	151	V
	5.47		47.5	RMS	34.6	-38.56	0.14	43.68	-	-	-	-	4	151	V	
	5570 (High BE)		5.725	63.66	Pk	35.1	-38.19	0	60.57	-	-	68.2	-7.63	141	126	H
			5.725868	65.28	Pk	35.1	-38.22	0	62.16	-	-	68.2	-6.04	141	126	H
			5.725	64.8	Pk	35.1	-38.19	0	61.71	-	-	68.2	-6.49	209	162	V
		5.72604	66.37	Pk	35.1	-38.22	0	63.25	-	-	68.2	-4.95	209	162	V	

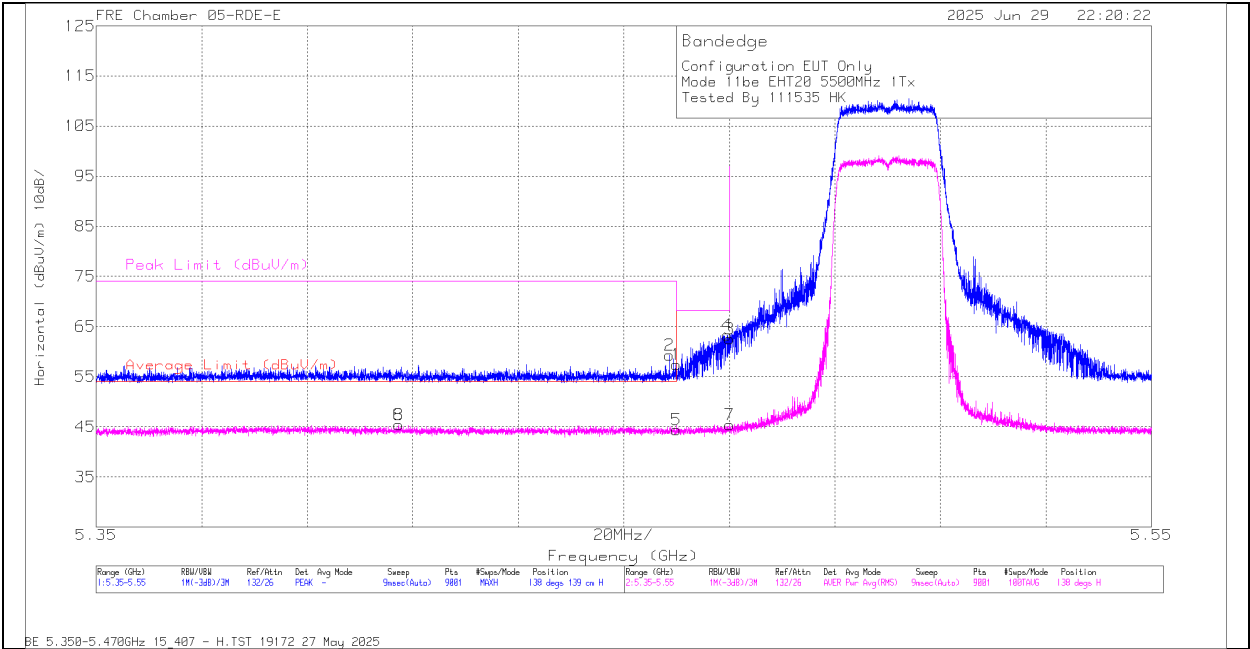
* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEGE (LOW CHANNEL / 5500MHZ)

HORIZONTAL RESULT



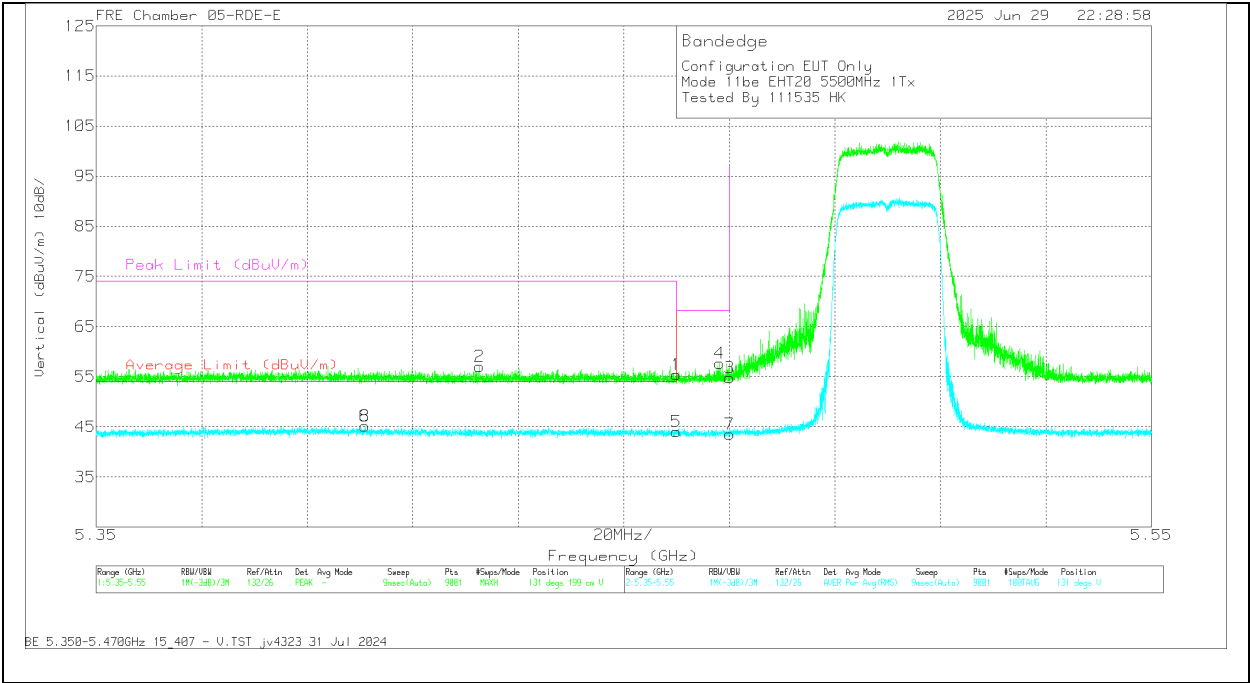
Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.46	58.6	Pk	34.3	-35.5	0	57.4	-	-	68.2	-10.8	138	139	H
6	* 5.458643	60.64	Pk	34.3	-35.6	0	59.34	-	-	74	-14.66	138	139	H
8	5.47	63.8	Pk	34.3	-35.6	0	62.5	-	-	68.2	-5.7	138	139	H
1	5.469577	64.58	Pk	34.3	-35.6	0	63.28	-	-	68.2	-4.92	138	139	H
5	* 5.46	45.63	RMS	34.3	-35.5	0	44.43	54	-9.57	-	-	138	139	H
4	* 5.407288	46.45	RMS	34.4	-35.5	0	45.35	54	-8.65	-	-	138	139	H
3	5.47	46.66	RMS	34.3	-35.6	0	45.36	-	-	-	-	138	139	H
7	* 5.407288	46.45	RMS	34.4	-35.5	0	45.35	54	-8.65	-	-	138	139	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5500MHz)

VERTICAL RESULT



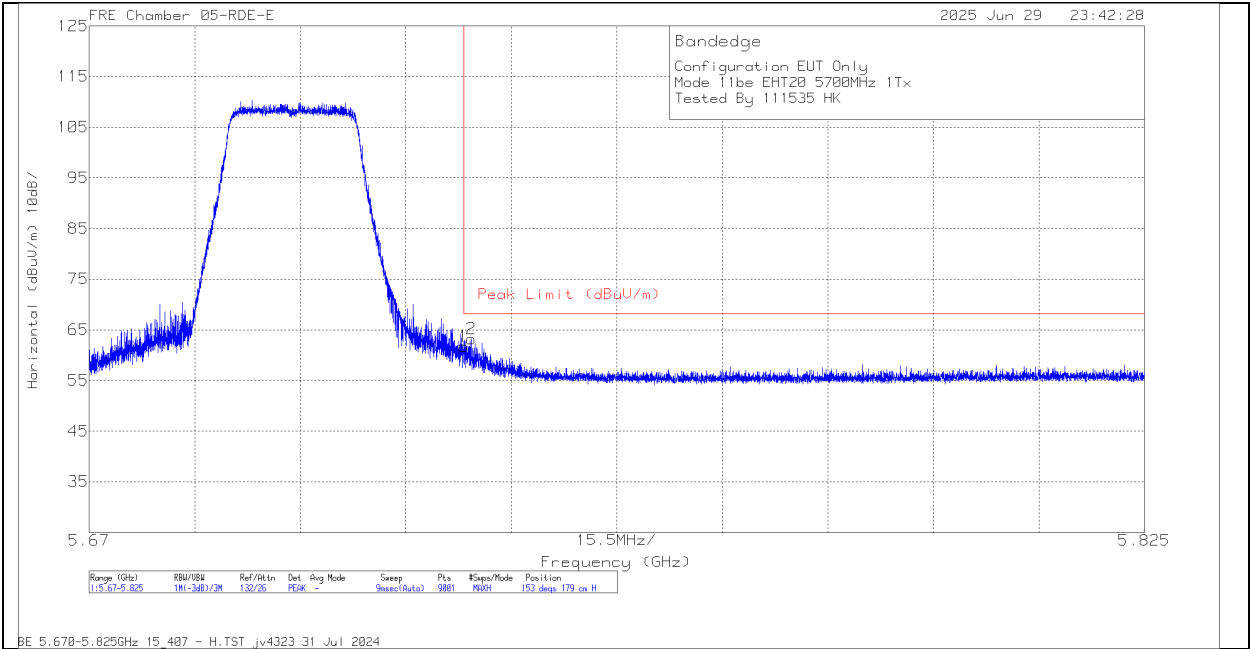
Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.46	56.62	Pk	34.3	-35.5	0	55.42	-	-	68.2	-12.78	131	199	V
6	* 5.422644	58.32	Pk	34.4	-35.66	0	57.06	-	-	74	-16.94	131	199	V
8	5.47	56.11	Pk	34.3	-35.6	0	54.81	-	-	68.2	-13.39	131	199	V
1	5.468199	59.01	Pk	34.3	-35.6	0	57.71	-	-	68.2	-10.49	131	199	V
5	* 5.46	45.26	RMS	34.3	-35.5	0	44.06	54	-9.94	-	-	131	199	V
4	* 5.400977	46.21	RMS	34.4	-35.5	0	45.11	54	-8.89	-	-	131	199	V
3	5.47	44.78	RMS	34.3	-35.6	0	43.48	-	-	-	-	131	199	V
7	* 5.400977	46.21	RMS	34.4	-35.5	0	45.11	54	-8.89	-	-	131	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL / 5700MHz)

HORIZONTAL RESULT

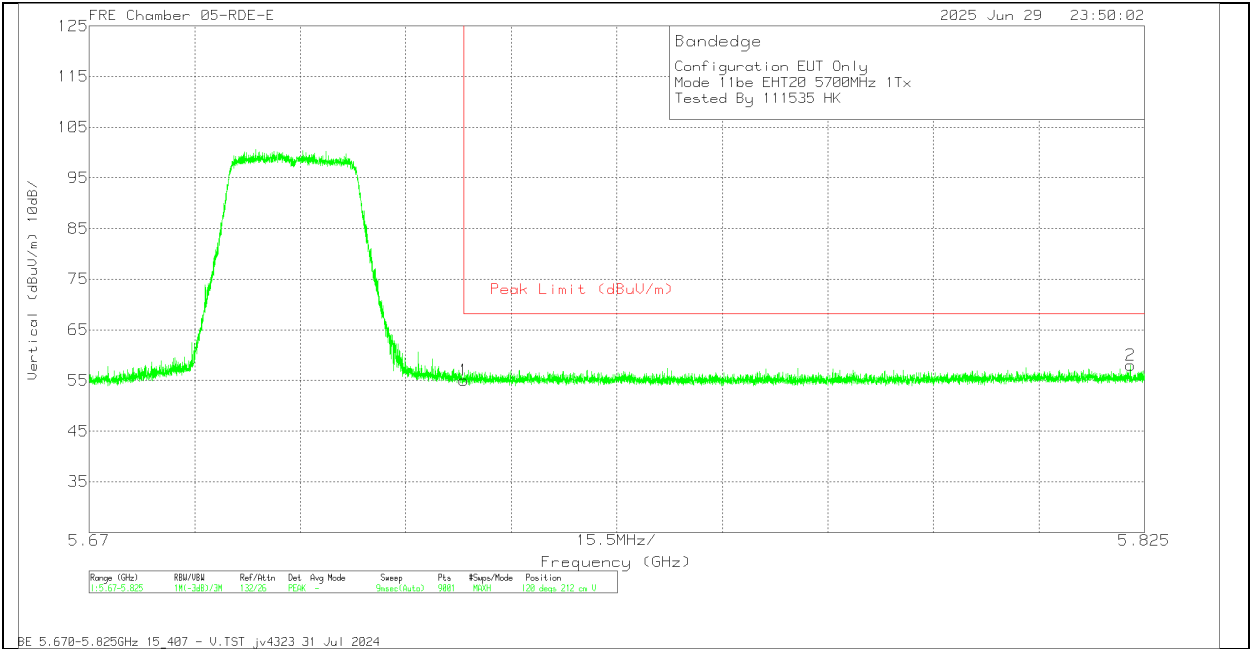


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	62.23	Pk	34.5	0	-35	61.73	-	-	68.2	-6.47	153
2	5.726109	63.67	Pk	34.5	0	-34.99	63.18	-	-	68.2	-5.02	153

Pk - Peak detector

BANDEDGE (HIGH CHANNEL / 5700MHz)

VERTICAL RESULT



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degr)	Height (cm)	Polarity
1	5.725	55.56	Pk	34.5	0	-35	55.06	-	-	68.2	-13.14	120
2	5.822983	57.88	Pk	34.7	0	-34.6	57.98	-	-	68.2	-10.22	120

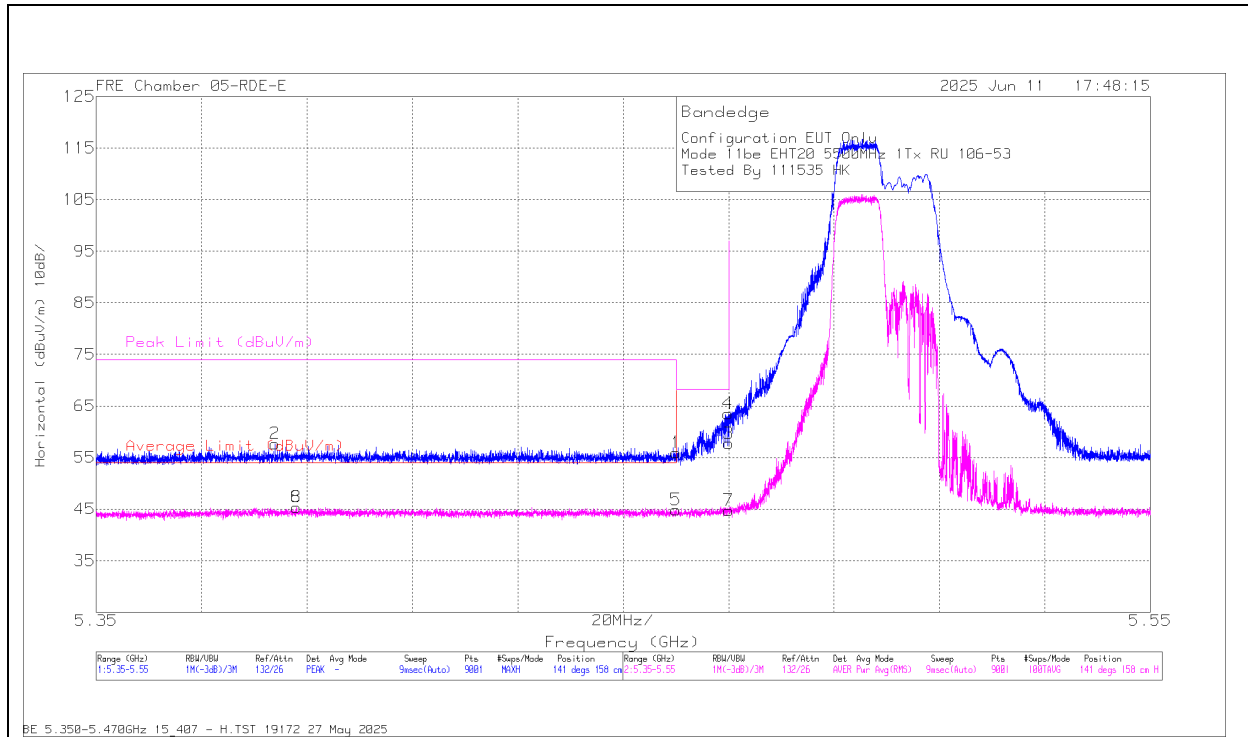
Pk - Peak detector

UNII-2c (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filt/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 (RU 242 / Index 61)	5570 (Lower)	6	* 5.46	57.24	Pk	35	-38.6	0	53.64	-	-	68.2	-14.56	311	249	H
			* 5.375244	60.35	Pk	35	-38.67	0	56.68	-	-	74	-17.32	311	249	H
			5.47	65.36	Pk	35	-38.56	0	61.8	-	-	68.2	-6.4	311	249	H
			5.469421	66.37	Pk	35	-38.58	0	62.79	-	-	68.2	-5.41	311	249	H
			* 5.46	47.1	RMS	35	-38.6	0	43.5	54	-10.5	-	-	311	249	H
			* 5.429044	47.78	RMS	35	-38.64	0	44.14	54	-9.86	-	-	311	249	H
			5.47	46.83	RMS	35	-38.56	0	43.27	-	-	-	-	311	249	H
			* 5.429044	47.78	RMS	35	-38.64	0	44.14	54	-9.86	-	-	311	249	H
			* 5.46	57.76	Pk	35	-38.6	0	54.16	-	-	68.2	-14.04	310	124	V
			* 5.352644	60.19	Pk	34.9	-38.81	0	56.28	-	-	74	-17.72	310	124	V
			5.47	58.52	Pk	35	-38.56	0	54.96	-	-	68.2	-13.24	310	124	V
			5.469777	60.43	Pk	35	-38.57	0	56.86	-	-	68.2	-11.34	310	124	V
			* 5.46	46.04	RMS	35	-38.6	0	42.44	54	-11.56	-	-	310	124	V
			* 5.429377	47.77	RMS	35	-38.63	0	44.14	54	-9.86	-	-	310	124	V
			5.47	47.04	RMS	35	-38.56	0	43.48	-	-	-	-	310	124	V
			* 5.429377	47.77	RMS	35	-38.63	0	44.14	54	-9.86	-	-	310	124	V
EHT160 (RU 242 / Index 564)	5570 (Upper)	6	5.725	57.83	Pk	35.1	-37.88	0	55.05	-	-	68.2	-13.15	334	172	H
			5.742803	60.69	Pk	35.2	-37.92	0	57.97	-	-	68.2	-10.23	334	172	H
			5.725	56.87	Pk	35.1	-37.88	0	54.09	-	-	68.2	-14.11	317	189	V
			5.785529	59.31	Pk	35.2	-37.77	0	56.74	-	-	68.2	-11.46	317	189	V
EHT160 (RU 242 / Index 61)	5570 (Lower)	5	#VALUE!	55.38	Pk	34.3	-35.5	0	54.18	-	-	68.2	-14.02	356	107	H
			#VALUE!	58.89	Pk	34.4	-35.43	0	57.86	-	-	74	-16.14	356	107	H
			5.47	63.47	Pk	34.3	-35.6	0	62.17	-	-	68.2	-6.03	356	107	H
			5.469088	64.82	Pk	34.3	-35.6	0	63.52	-	-	68.2	-4.68	356	107	H
			#VALUE!	45.4	RMS	34.3	-35.5	0	44.2	54	-9.8	-	-	356	107	H
			#VALUE!	46.39	RMS	34.4	-35.4	0	45.39	54	-8.61	-	-	356	107	H
			5.47	45.56	RMS	34.3	-35.6	0	44.26	-	-	-	-	356	107	H
			#VALUE!	46.39	RMS	34.4	-35.4	0	45.39	54	-8.61	-	-	356	107	H
			#VALUE!	55.78	Pk	34.3	-35.5	0	54.58	-	-	68.2	-13.62	338	133	V
			#VALUE!	58.9	Pk	34.3	-35.5	0	57.7	-	-	74	-16.3	338	133	V
			5.47	60.69	Pk	34.3	-35.6	0	59.39	-	-	68.2	-8.81	338	133	V
			5.46991	61.53	Pk	34.3	-35.6	0	60.23	-	-	68.2	-7.97	338	133	V
			#VALUE!	45.27	RMS	34.3	-35.5	0	44.07	54	-9.93	-	-	338	133	V
			#VALUE!	46.48	RMS	34.4	-35.5	0	45.38	54	-8.62	-	-	338	133	V
			5.47	45.14	RMS	34.3	-35.6	0	43.84	-	-	-	-	338	133	V
			#VALUE!	46.48	RMS	34.4	-35.5	0	45.38	54	-8.62	-	-	338	133	V
EHT160 (RU 242 / Index 564)	5570 (Upper)	6	5.725	56.87	Pk	35.1	-37.88	0	54.09	-	-	68.2	-14.11	346	159	H
			5.792839	59.12	Pk	35.2	-37.79	0	56.53	-	-	68.2	-11.67	346	159	H
			5.725	56.71	Pk	35.1	-37.88	0	53.93	-	-	68.2	-14.27	337	126	V
			5.770853	59.12	Pk	35.2	-37.88	0	56.44	-	-	68.2	-11.76	337	126	V
EHT160 (RU 52 / Index 37)	5570 (Lower)	6	* 5.46	57.13	Pk	35	-38.6	0	53.53	-	-	68.2	-14.67	308	159	H
			* 5.449266	59.9	Pk	35	-38.6	0	56.3	-	-	74	-17.7	308	159	H
			5.47	65.63	Pk	35	-38.56	0	62.07	-	-	68.2	-6.13	308	159	H
			5.46991	66.6	Pk	35	-38.56	0	63.04	-	-	68.2	-5.16	308	159	H
			* 5.46	46.72	RMS	35	-38.6	0	43.12	54	-10.88	-	-	308	159	H
			* 5.388311	47.99	RMS	35	-38.66	0	44.33	54	-9.67	-	-	308	159	H
			5.47	46.86	RMS	35	-38.56	0	43.3	-	-	-	-	308	159	H
			* 5.388311	47.99	RMS	35	-38.66	0	44.33	54	-9.67	-	-	308	159	H
			* 5.46	57.26	Pk	35	-38.6	0	53.66	-	-	68.2	-14.54	17	111	V
			* 5.419244	59.97	Pk	35	-38.62	0	56.35	-	-	74	-17.65	17	111	V
			5.47	57.76	Pk	35	-38.56	0	54.2	-	-	68.2	-14	17	111	V
			5.464466	58.94	Pk	35	-38.59	0	55.35	-	-	68.2	-12.85	17	111	V
			* 5.46	46.24	RMS	35	-38.6	0	42.64	54	-11.36	-	-	17	111	V
			* 5.3948	47.86	RMS	35	-38.74	0	44.12	54	-9.88	-	-	17	111	V
			5.47	46.05	RMS	35	-38.56	0	42.49	-	-	-	-	17	111	V
			* 5.3948	47.86	RMS	35	-38.74	0	44.12	54	-9.88	-	-	17	111	V
EHT160 (RU 52 / Index 552)	5570 (Upper)	6	5.725	58.27	Pk	35.1	-37.88	0	55.49	-	-	68.2	-12.71	313	155	H
			5.800064	62.09	Pk	35.2	-37.7	0	59.59	-	-	68.2	-8.61	313	155	H
			5.725	57.43	Pk	35.1	-37.88	0	54.65	-	-	68.2	-13.55	311	224	V
			5.799072	59.1	Pk	35.2	-37.75	0	56.55	-	-	68.2	-11.65	311	224	V
EHT160 (RU 52 / Index 37)	5570 (Lower)	5	* 5.46	56.69	Pk	34.3	-35.5	0	55.49	-	-	68.2	-12.71	357	213	H
			* 5.409155	58.96	Pk	34.4	-35.6	0	57.76	-	-	74	-16.24	357	213	H
			5.47	62.81	Pk	34.3	-35.6	0	61.51	-	-	68.2	-6.69	357	213	H
			5.469888	63.39	Pk	34.3	-35.6	0	62.09	-	-	68.2	-6.11	357	213	H
			* 5.46	45.63	RMS	34.3	-35.5	0	44.43	54	-9.57	-	-	357	213	H
			* 5.375755	46.38	RMS	34.4	-35.5	0	45.28	54	-8.72	-	-	357	213	H
			5.47	45.89	RMS	34.3	-35.6	0	44.59	-	-	-	-	357	213	H
			* 5.375755	46.38	RMS	34.4	-35.5	0	45.28	54	-8.72	-	-	357	213	H
			* 5.46	55.72	Pk	34.3	-35.5	0	54.52	-	-	68.2	-13.68	333	136	V
			* 5.43671	58.31	Pk	34.3	-35.5	0	57.11	-	-	74	-16.89	333	136	V
			5.47	61.27	Pk	34.3	-35.6	0	59.97	-	-	68.2	-8.23	333	136	V
			5.469754	62.22	Pk	34.3	-35.6	0	60.92	-	-	68.2	-7.28	333	136	V
			* 5.46	44.85	RMS	34.3	-35.5	0	43.65	54	-10.35	-	-	333	136	V
			* 5.427533	46.28	RMS	34.4	-35.6	0	45.08	54	-8.92	-	-	333	136	V
			5.47	44.52	RMS	34.3	-35.6	0	43.22	-	-	-	-	333	136	V
			* 5.427533	46.28	RMS	34.4	-35.6	0	45.08	54	-8.92	-	-	333	136	V
EHT160 (RU 52 / Index 552)	5570 (Upper)	6	5.725	57.55	Pk	35.1	-37.88	0	54.77	-	-	68.2	-13.43	355	147	H
			5.75468	59.46	Pk	35.2	-37.94	0	56.72	-	-	68.2	-11.48	355	147	H
			5.725	57.64	Pk	35.1	-37.88	0	54.86	-	-	68.2	-13.34	354	164	V
			5.725237	59.41	Pk	35.1	-37.88	0	56.63	-	-	68.2	-11.57	354	164	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

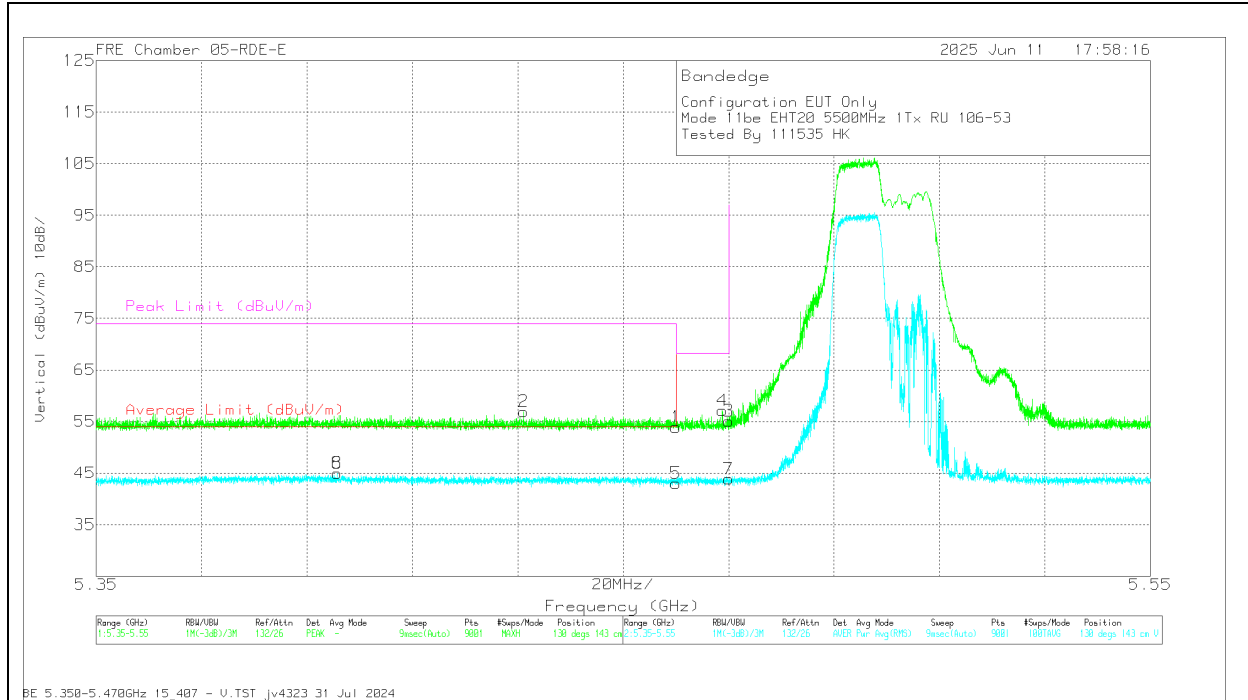
1TX Antenna 6 MODE: PARTIAL RU 106**BANDEGE (LOW CHANNEL / 5500MHz)****HORIZONTAL RESULT****Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80404 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	57.13	Pk	34.3	-35.5	0	55.93	-	-	68.2	-12.27	141	158	H
2	* 5.383889	58.79	Pk	34.4	-35.5	0	57.69	-	-	74	-16.31	141	158	H
3	5.47	59.03	Pk	34.3	-35.6	0	57.73	-	-	68.2	-10.47	141	158	H
4	5.469888	64.81	Pk	34.3	-35.6	0	63.51	-	-	68.2	-4.69	141	158	H
5	* 5.46	46.06	RMS	34.3	-35.5	0	44.86	54	-9.14	-	-	141	158	H
6	* 5.387977	46.38	RMS	34.4	-35.4	0	45.38	54	-8.62	-	-	141	158	H
7	5.47	46.04	RMS	34.3	-35.6	0	44.74	-	-	-	-	141	158	H
8	* 5.387977	46.38	RMS	34.4	-35.4	0	45.38	54	-8.62	-	-	141	158	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

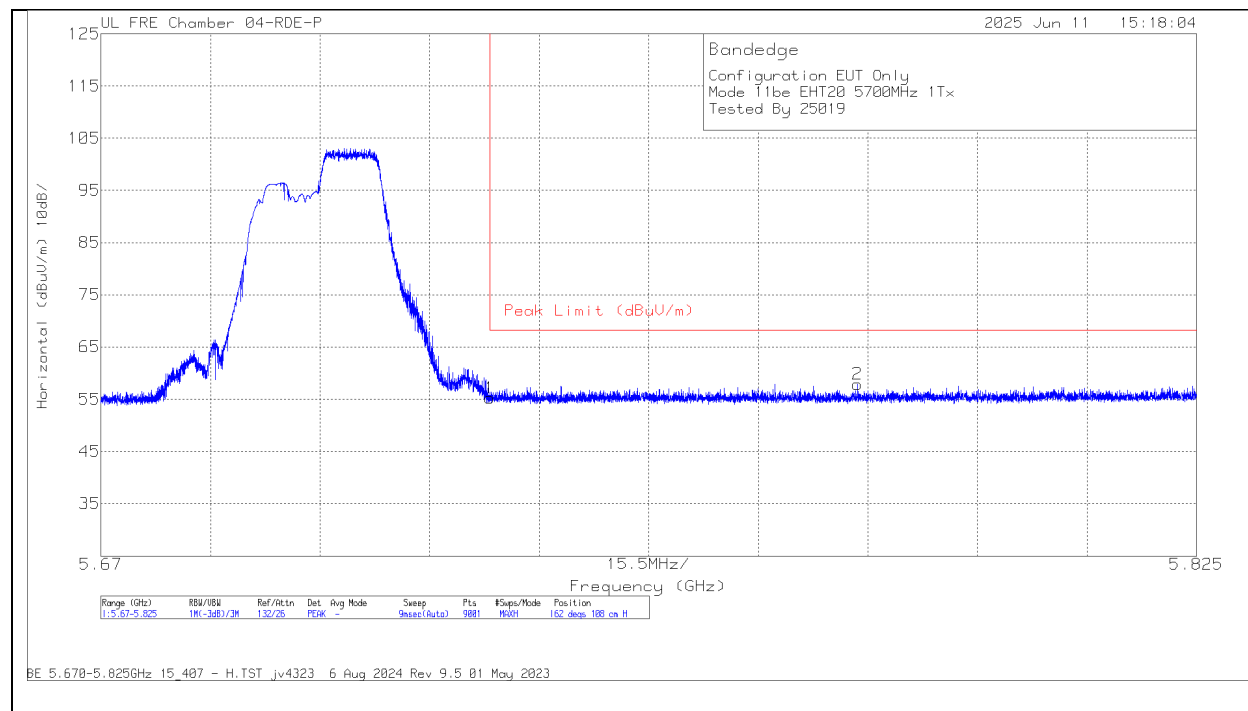
1TX Antenna 6 MODE: PARTIAL RU 106**BANDEDGE (LOW CHANNEL / 5500MHz)****VERTICAL RESULT****Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80404 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	55.12	Pk	34.3	-35.5	0	53.92	-	-	68.2	-14.28	130	143	V
2	* 5.431066	58.12	Pk	34.4	-35.6	0	56.92	-	-	74	-17.08	130	143	V
3	5.47	56.4	Pk	34.3	-35.6	0	55.1	-	-	68.2	-13.1	130	143	V
4	5.468799	58.43	Pk	34.3	-35.6	0	57.13	-	-	68.2	-11.07	130	143	V
5	* 5.46	44.22	RMS	34.3	-35.5	0	43.02	54	-10.98	-	-	130	143	V
6	* 5.395755	46.02	RMS	34.4	-35.42	0	45	54	-9	-	-	130	143	V
7	5.47	45.14	RMS	34.3	-35.6	0	43.84	-	-	-	-	130	143	V
8	* 5.395755	46.02	RMS	34.4	-35.42	0	45	54	-9	-	-	130	143	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1TX Antenna 6 MODE: PARTIAL RU 106**BANDEDGE (HIGH CHANNEL / 5700MHz)****HORIZONTAL RESULT****Trace Markers**

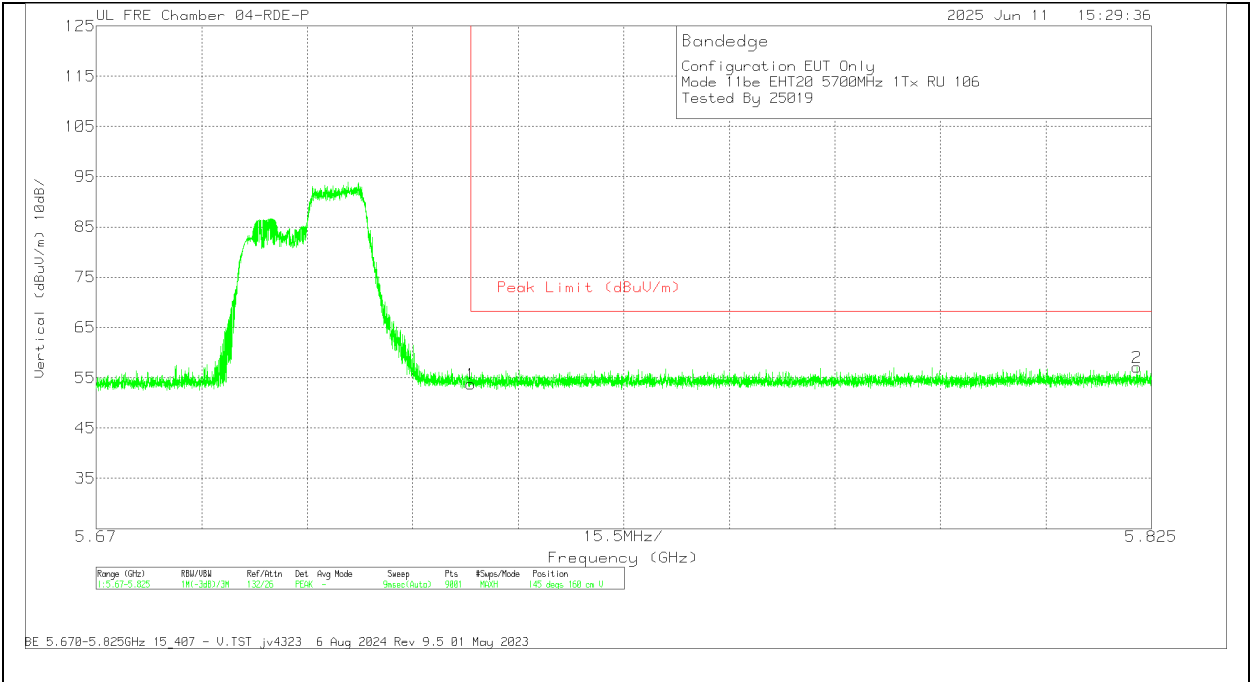
Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200897 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	57.78	Pk	34.5	0	-37.07	55.21	68.2	-12.99	162	108	H
2	5.777035	59.98	Pk	34.6	0	-36.74	57.84	68.2	-10.36	162	108	H

Pk - Peak detector

1TX Antenna 6 MODE: PARTIAL RU 106

BANDEDGE (HIGH CHANNEL / 5700MHz)

VERTICAL RESULT



Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200897 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	56.29	Pk	34.5	0	-37.07	53.72	68.2	-14.48	145	160	V
2	5.822914	58.86	Pk	34.8	0	-36.59	57.07	68.2	-11.13	145	160	V

Pk - Peak detector

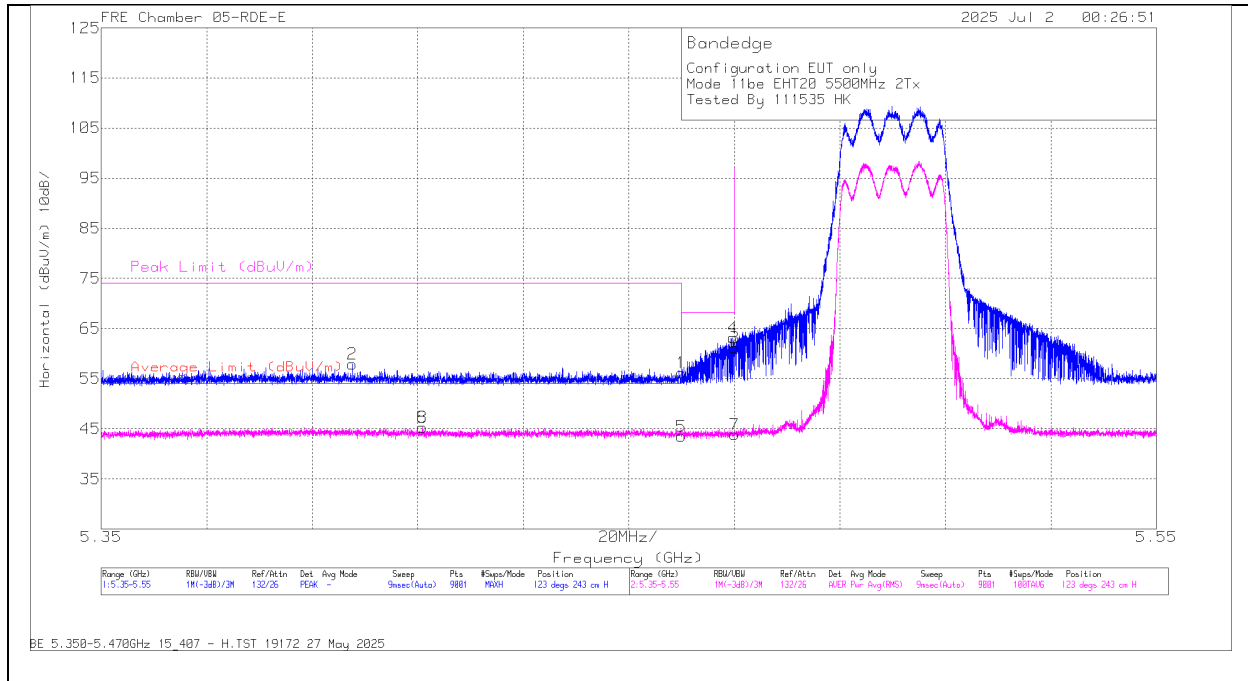
10.1.21. 802.11be MIMO SU MODE IN UNII-2C BAND – BANDEDGES

UNII-2c (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	5500	6 + 5	* 5.46	57.34	Pk	34.3	-35.5	0	56.14	-	-	68.2	-12.06	123	243	H
			* 5.3976	59.01	Pk	34.4	-35.5	0	57.91	-	-	74	-16.09	123	243	H
			5.47	62.43	Pk	34.3	-35.6	0	61.13	-	-	68.2	-7.07	123	243	H
			5.469754	64.42	Pk	34.3	-35.6	0	63.12	-	-	68.2	-5.08	123	243	H
			* 5.46	44.66	RMS	34.3	-35.5	0	43.46	54	-10.54	-	-	123	243	H
			* 5.410911	46.47	RMS	34.4	-35.6	0	45.27	54	-8.73	-	-	123	243	H
			5.47	45.14	RMS	34.3	-35.6	0	43.84	-	-	-	-	123	243	H
			* 5.410911	46.47	RMS	34.4	-35.6	0	45.27	54	-8.73	-	-	123	243	H
			* 5.46	56.63	Pk	34.3	-35.5	0	55.43	-	-	68.2	-12.77	157	248	V
			* 5.397488	58.92	Pk	34.4	-35.5	0	57.82	-	-	74	-16.18	157	248	V
			5.47	56.76	Pk	34.3	-35.6	0	55.46	-	-	68.2	-12.74	157	248	V
			5.469865	60.93	Pk	34.3	-35.6	0	59.63	-	-	68.2	-8.57	157	248	V
	* 5.46		44.97	RMS	34.3	-35.5	0	43.77	54	-10.23	-	-	157	248	V	
	* 5.3782		46.5	RMS	34.4	-35.5	0	45.4	54	-8.6	-	-	157	248	V	
	5.47		44.89	RMS	34.3	-35.6	0	43.59	-	-	-	-	157	248	V	
	* 5.3782		46.5	RMS	34.4	-35.5	0	45.4	54	-8.6	-	-	157	248	V	
	5700		5.725	65.51	Pk	35	-37.21	0	63.3	-	-	68.2	-4.9	12	399	H
			5.726178	65.44	Pk	35	-37.22	0	63.22	-	-	68.2	-4.98	12	399	H
			5.725	57.03	Pk	35	-37.21	0	54.82	-	-	68.2	-13.38	12	399	V
			5.775037	60.22	Pk	35	-37.06	0	58.16	-	-	68.2	-10.04	12	399	V
EHT40 (SU Mode)	5510	6 + 5	* 5.46	61.41	Pk	34.8	-37.2	0	59.01	-	-	68.2	-9.19	23	165	H
			* 5.459843	63.17	Pk	34.8	-37.2	0	60.77	-	-	74	-13.23	23	165	H
			* 5.46	46.18	RMS	34.8	-37.2	0	43.78	54	-10.22	-	-	23	165	H
			* 5.3832	47.64	RMS	34.7	-37.42	0	44.92	54	-9.08	-	-	23	165	H
			* 5.3832	47.64	RMS	34.7	-37.42	0	44.92	54	-9.08	-	-	23	165	H
			5.469888	65.52	Pk	34.8	-37.01	0	63.31	-	-	68.2	-4.89	23	165	H
			5.47	62.43	Pk	34.8	-37	0	60.23	-	-	68.2	-7.97	23	165	H
			5.47	46.37	RMS	34.8	-37	0	44.17	-	-	-	-	23	165	H
			* 5.46	56.03	Pk	34.8	-37.2	0	53.63	-	-	68.2	-14.57	48	332	V
			* 5.386311	60.03	Pk	34.7	-37.43	0	57.3	-	-	74	-16.7	48	332	V
			* 5.46	46.03	RMS	34.8	-37.2	0	43.63	54	-10.37	-	-	48	332	V
			* 5.437532	47.31	RMS	34.8	-37.2	0	44.91	54	-9.09	-	-	48	332	V
	* 5.437532		47.31	RMS	34.8	-37.2	0	44.91	54	-9.09	-	-	48	332	V	
	5.46291		59.89	Pk	34.8	-37.2	0	57.49	-	-	68.2	-10.71	48	332	V	
	5.47		56.19	Pk	34.8	-37	0	53.99	-	-	68.2	-14.21	48	332	V	
	5.47		45.6	RMS	34.8	-37	0	43.4	-	-	-	-	48	332	V	
	5670		5.725	64.06	Pk	34.9	-36.7	0	62.26	-	-	68.2	-5.94	0	185	H
			5.725042	65.5	Pk	34.9	-36.7	0	63.7	-	-	68.2	-4.5	0	185	H
			5.725	57.47	Pk	34.9	-36.7	0	55.67	-	-	68.2	-12.53	79	179	V
			5.731672	59.33	Pk	34.9	-36.7	0	57.53	-	-	68.2	-10.67	79	179	V
EHT80 (SU Mode)	5530	6 + 5	* 5.46	58.39	Pk	34.6	-36.92	0	56.07	-	-	68.2	-12.13	163	126	H
			* 5.456488	64.05	Pk	34.6	-36.98	0	61.67	-	-	74	-12.33	163	126	H
			* 5.46	46.53	RMS	34.6	-36.92	0	44.21	54	-9.79	-	-	163	126	H
			* 5.450755	47.36	RMS	34.6	-37.01	0	44.95	54	-9.05	-	-	163	126	H
			* 5.450755	47.36	RMS	34.6	-37.01	0	44.95	54	-9.05	-	-	163	126	H
			5.466888	65.83	Pk	34.6	-36.97	0	63.46	-	-	68.2	-4.74	163	126	H
			5.47	58.64	Pk	34.6	-36.94	0	56.3	-	-	68.2	-11.9	163	126	H
			5.47	47.58	RMS	34.6	-36.94	0	45.24	-	-	-	-	163	126	H
			* 5.46	56.54	Pk	34.6	-36.92	0	54.22	-	-	68.2	-13.98	200	158	V
			* 5.458066	61.21	Pk	34.6	-36.93	0	58.88	-	-	74	-15.12	200	158	V
			* 5.46	45.55	RMS	34.6	-36.92	0	43.23	54	-10.77	-	-	200	158	V
			* 5.444066	47.01	RMS	34.6	-36.97	0	44.64	54	-9.36	-	-	200	158	V
	* 5.444066		47.01	RMS	34.6	-36.97	0	44.64	54	-9.36	-	-	200	158	V	
	5.468177		60.23	Pk	34.6	-36.97	0	57.86	-	-	68.2	-10.34	200	158	V	
	5.47		56.6	Pk	34.6	-36.94	0	54.26	-	-	68.2	-13.94	200	158	V	
	5.47		45.84	RMS	34.6	-36.94	0	43.5	-	-	-	-	200	158	V	
	5610		5.725	62.46	Pk	35.1	-37.88	0	59.68	-	-	68.2	-8.52	323	149	H
			5.735685	65.71	Pk	35.2	-37.89	0	63.02	-	-	68.2	-5.18	323	149	H
			5.725	57.32	Pk	35.1	-37.88	0	54.54	-	-	68.2	-13.66	18	287	V
			5.731741	59.93	Pk	35.1	-37.92	0	57.11	-	-	68.2	-11.09	18	287	V
EHT160 (SU Mode)	5570 (Low BE)	6 + 5	* 5.46	57.1	Pk	34.6	-34.8	0	56.9	-	-	68.2	-11.3	61	133	H
			* 5.445987	63.72	Pk	34.6	-34.9	0	63.42	-	-	74	-10.58	61	133	H
			* 5.46	40.48	RMS	34.6	-34.8	0.14	40.42	54	-13.58	-	-	61	133	H
			* 5.445761	47.55	RMS	34.6	-34.9	0.14	47.39	54	-6.61	-	-	61	133	H
			* 5.445761	47.55	RMS	34.6	-34.9	0.14	47.39	54	-6.61	-	-	61	133	H
			5.466289	63.69	Pk	34.6	-34.8	0	63.49	-	-	68.2	-4.71	61	133	H
			5.47	57.92	Pk	34.6	-34.8	0	57.72	-	-	68.2	-10.48	61	133	H
			5.47	40.79	RMS	34.6	-34.8	0.14	40.73	-	-	-	-	61	133	H
			* 5.46	53.91	Pk	34.6	-34.8	0	53.71	-	-	68.2	-14.49	87	282	V
			* 5.444386	59.64	Pk	34.6	-34.9	0	59.34	-	-	74	-14.66	87	282	V
			* 5.46	39.49	RMS	34.6	-34.8	0.14	39.43	54	-14.57	-	-	87	282	V
			* 5.444386	43.91	RMS	34.6	-34.9	0.14	43.75	54	-10.25	-	-	87	282	V
	* 5.444386		43.91	RMS	34.6	-34.9	0.14	43.75	54	-10.25	-	-	87	282	V	
	5.468514		57.57	Pk	34.6	-34.8	0	57.37	-	-	68.2	-10.83	87	282	V	
	5.47		55.04	Pk	34.6	-34.8	0	54.84	-	-	68.2	-13.36	87	282	V	
	5.47		38.57	RMS	34.6	-34.8	0.14	38.51	-	-	-	-	87	282	V	
	5570 (High BE)		5.725	58.25	Pk	34.8	-34.1	0	58.95	-	-	68.2	-9.25	68	165	H
			5.727821	62.06	Pk	34.8	-34.1	0	62.76	-	-	68.2	-5.44	68	165	H
			5.725	51.32	Pk	34.8	-34.1	0	52.02	-	-	68.2	-16.18	101	129	V
			5.727763	56.73	Pk	34.8	-34.1	0	57.43	-	-	68.2	-10.77	101	129	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

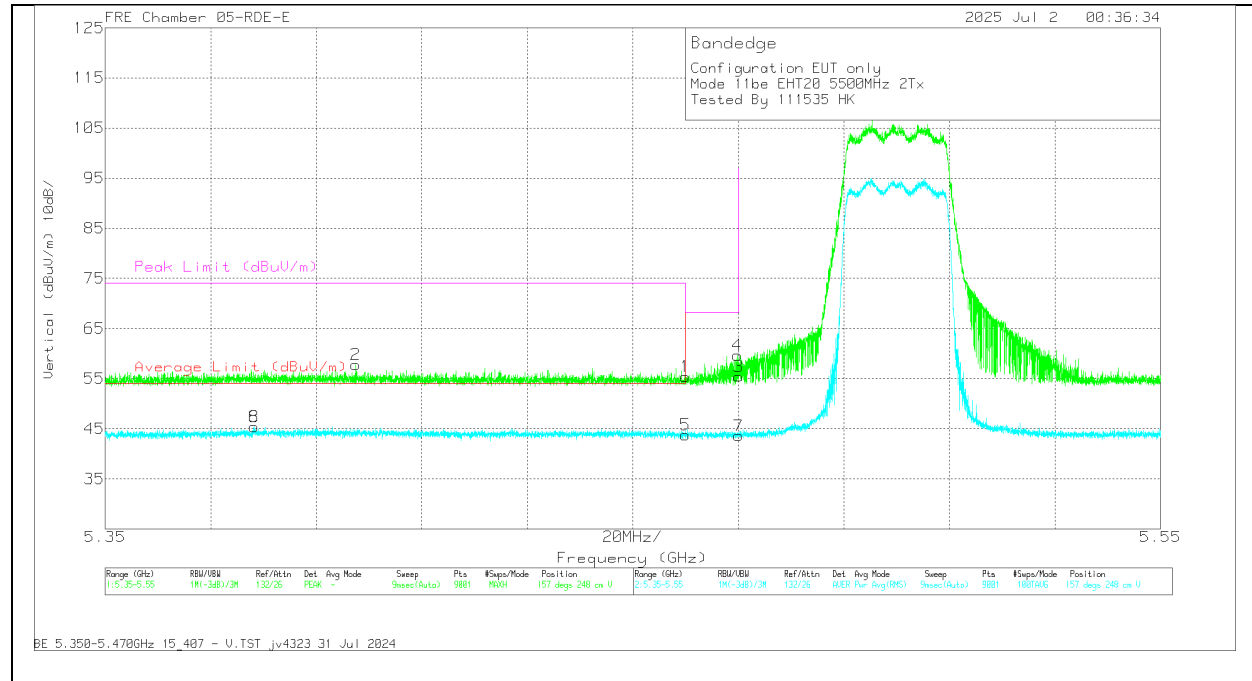
BANDEGE (LOW CHANNEL / 5500MHz)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	57.34	Pk	34.3	-35.5	0	56.14	-	-	68.2	-12.06	123	243	H
2	* 5.3976	59.01	Pk	34.4	-35.5	0	57.91	-	-	74	-16.09	123	243	H
3	5.47	62.43	Pk	34.3	-35.6	0	61.13	-	-	68.2	-7.07	123	243	H
4	5.469754	64.42	Pk	34.3	-35.6	0	63.12	-	-	68.2	-5.08	123	243	H
5	* 5.46	44.66	RMS	34.3	-35.5	0	43.46	54	-10.54	-	-	123	243	H
6	* 5.410911	46.47	RMS	34.4	-35.6	0	45.27	54	-8.73	-	-	123	243	H
7	5.47	45.14	RMS	34.3	-35.6	0	43.84	-	-	-	-	123	243	H
8	* 5.410911	46.47	RMS	34.4	-35.6	0	45.27	54	-8.73	-	-	123	243	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

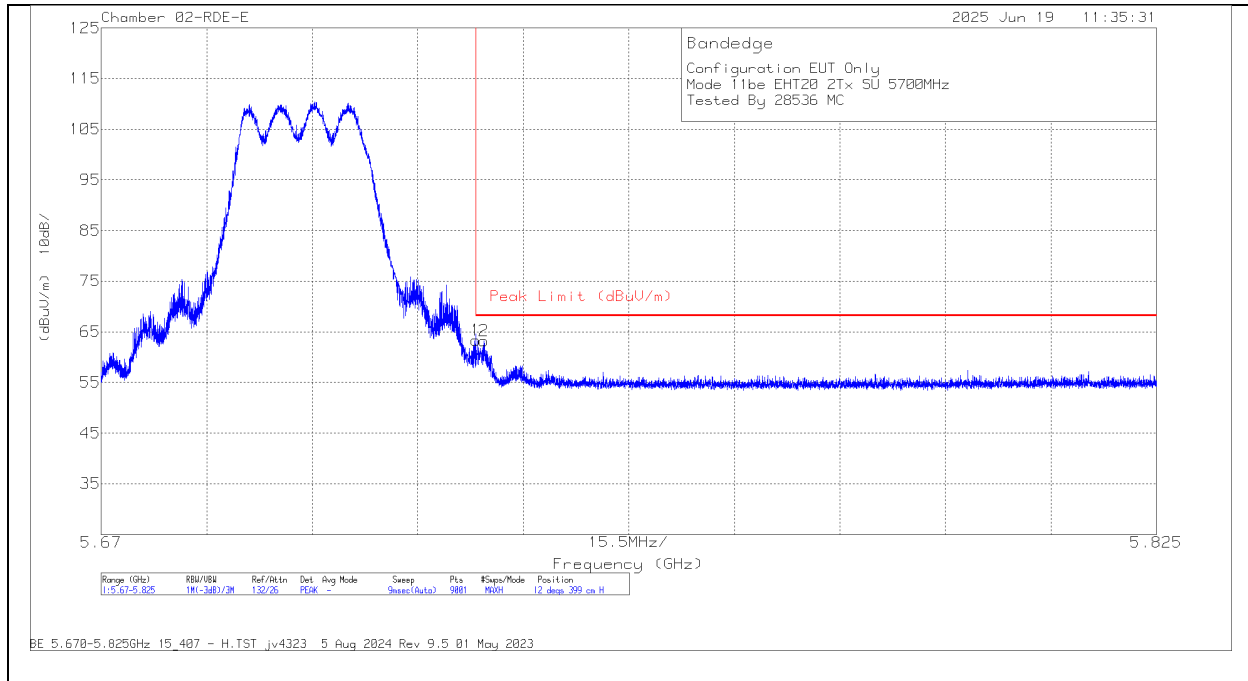
BANDEGE (LOW CHANNEL / 5500MHz)**VERTICAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	56.63	Pk	34.3	-35.5	0	55.43	-	-	68.2	-12.77	157	248	V
2	* 5.397488	58.92	Pk	34.4	-35.5	0	57.82	-	-	74	-16.18	157	248	V
3	5.47	56.76	Pk	34.3	-35.6	0	55.46	-	-	68.2	-12.74	157	248	V
4	5.469865	60.93	Pk	34.3	-35.6	0	59.63	-	-	68.2	-8.57	157	248	V
5	* 5.46	44.97	RMS	34.3	-35.5	0	43.77	54	-10.23	-	-	157	248	V
6	* 5.3782	46.5	RMS	34.4	-35.5	0	45.4	54	-8.6	-	-	157	248	V
7	5.47	44.89	RMS	34.3	-35.6	0	43.59	-	-	-	-	157	248	V
8	* 5.3782	46.5	RMS	34.4	-35.5	0	45.4	54	-8.6	-	-	157	248	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

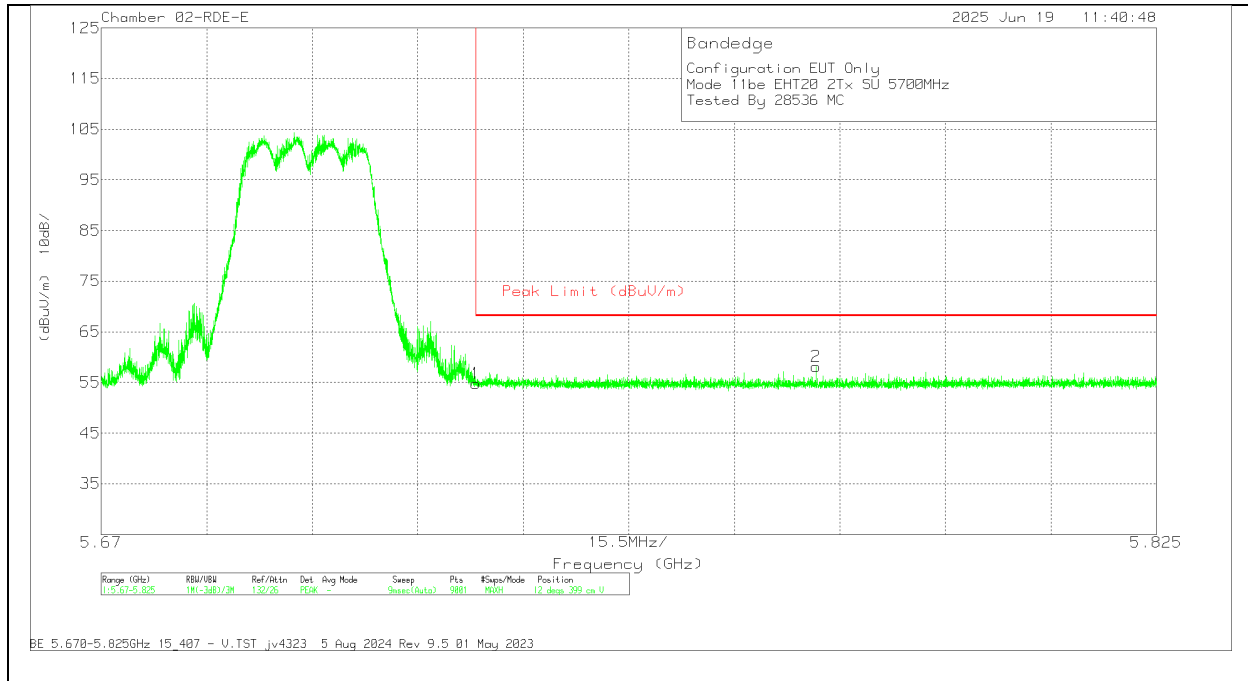
Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL / 5700MHz)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	65.51	Pk	35	0	-37.21	63.3	68.2	-4.9	12	399	H
2	5.726178	65.44	Pk	35	0	-37.22	63.22	68.2	-4.98	12	399	H

Pk - Peak detector

BANDEDGE (HIGH CHANNEL / 5700MHz)**VERTICAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	57.03	Pk	35	0	-37.21	54.82	68.2	-13.38	12	399	V
2	5.775037	60.22	Pk	35	0	-37.06	58.16	68.2	-10.04	12	399	V

Pk - Peak detector

10.1.22. 802.11be MIMO PARTIAL RU MODE IN UNII-2C BAND – BANDEDGES

UNII-2c (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 106 / Index 53)	5500	6 + 5	* 5.379689	47.17	RMS	34.6	-36.55	0	45.22	54	-8.78	-	-	334	163	H
			* 5.379689	47.17	RMS	34.6	-36.55	0	45.22	54	-8.78	-	-	334	163	H
			* 5.400733	59.17	Pk	34.6	-36.53	0	57.24	-	-	74	-16.76	334	163	H
			* 5.46	56.3	Pk	34.5	-36.55	0	54.25	-	-	68.2	-13.95	334	163	H
			* 5.46	46.32	RMS	34.5	-36.55	0	44.27	54	-9.73	-	-	334	163	H
			5.469821	65.25	Pk	34.5	-36.45	0	63.3	-	-	68.2	-4.9	334	163	H
			5.47	65.12	Pk	34.5	-36.46	0	63.16	-	-	68.2	-5.04	334	163	H
			5.47	46.26	RMS	34.5	-36.46	0	44.3	-	-	-	-	334	163	H
			* 5.355467	46.71	RMS	34.6	-36.59	0	44.72	54	-9.28	-	-	327	118	V
			* 5.355467	46.71	RMS	34.6	-36.59	0	44.72	54	-9.28	-	-	327	118	V
			* 5.389222	58.64	Pk	34.6	-36.56	0	56.68	-	-	74	-17.32	327	118	V
			* 5.46	55.99	Pk	34.5	-36.55	0	53.94	-	-	68.2	-14.26	327	118	V
			* 5.46	45.27	RMS	34.5	-36.55	0	43.22	54	-10.78	-	-	327	118	V
			5.468065	59.46	Pk	34.5	-36.44	0	57.52	-	-	68.2	-10.68	327	118	V
			5.47	55.82	Pk	34.5	-36.46	0	53.86	-	-	68.2	-14.34	327	118	V
			5.47	45.51	RMS	34.5	-36.46	0	43.55	-	-	-	-	327	118	V
			5.725	62.3	Pk	34.8	-36.16	0	60.94	-	-	68.2	-7.26	327	242	H
EHT20 (RU 106 / Index 54)	5700		5.72511	63.33	Pk	34.8	-36.16	0	61.97	-	-	68.2	-6.23	327	242	H
			5.725	55.7	Pk	34.8	-36.16	0	54.34	-	-	68.2	-13.86	312	395	V
			5.794997	57.96	Pk	34.9	-36.07	0	56.79	-	-	68.2	-11.41	312	395	V
			* 5.46	59.41	Pk	35	-38.6	0	55.81	-	-	68.2	-12.39	331	186	H
EHT40 (RU 106 / Index 53)	5510	6 + 5	* 5.379511	61.11	Pk	35	-38.73	0	57.38	-	-	74	-16.62	331	186	H
			5.47	59.4	Pk	35	-38.56	0	55.84	-	-	68.2	-12.36	331	186	H
			5.469643	60.8	Pk	35	-38.57	0	57.23	-	-	68.2	-10.97	331	186	H
			* 5.46	47	RMS	35	-38.6	0	43.4	54	-10.6	-	-	331	186	H
			* 5.457954	48.43	RMS	35	-38.61	0	44.82	54	-9.18	-	-	331	186	H
			5.47	47.62	RMS	35	-38.56	0	44.06	-	-	-	-	331	186	H
			* 5.457954	48.43	RMS	35	-38.61	0	44.82	54	-9.18	-	-	331	186	H
			* 5.46	57.49	Pk	35	-38.6	0	53.89	-	-	68.2	-14.31	303	383	V
			* 5.3906	60.4	Pk	35	-38.68	0	56.72	-	-	74	-17.28	303	383	V
			5.47	58.45	Pk	35	-38.56	0	54.89	-	-	68.2	-13.31	303	383	V
			5.465799	59.54	Pk	35	-38.58	0	55.96	-	-	68.2	-12.24	303	383	V
			* 5.46	46.72	RMS	35	-38.6	0	43.12	54	-10.88	-	-	303	383	V
			* 5.451777	47.96	RMS	35	-38.63	0	44.33	54	-9.67	-	-	303	383	V
			5.47	46.45	RMS	35	-38.56	0	42.89	-	-	-	-	303	383	V
			* 5.451777	47.96	RMS	35	-38.63	0	44.33	54	-9.67	-	-	303	383	V
EHT40 (RU 106 / Index 56)	5670		5.725	57.96	Pk	35.1	-37.88	0	55.18	-	-	68.2	-13.02	175	169	H
			5.798356	60.64	Pk	35.2	-37.74	0	58.1	-	-	68.2	-10.1	175	169	H
			5.725	57.26	Pk	35.1	-37.88	0	54.48	-	-	68.2	-13.72	170	171	V
			5.807535	59.61	Pk	35.2	-37.76	0	57.05	-	-	68.2	-11.15	170	171	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

UNII-2c (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 (RU 484 / Index 65)	5530	6 + 5	* 5.457999	47.91	RMS	34.6	-37.75	0	44.76	54	-9.24	-	-	339	234	H
			* 5.457999	47.91	RMS	34.6	-37.75	0	44.76	54	-9.24	-	-	339	234	H
			* 5.45831	64.88	Pk	34.6	-37.75	0	61.73	-	-	74	-12.27	339	234	H
			* 5.46	59.32	Pk	34.6	-37.72	0	56.2	-	-	68.2	-12	339	234	H
			* 5.46	47.26	RMS	34.6	-37.72	0	44.14	54	-9.86	-	-	339	234	H
			5.468843	66.91	Pk	34.6	-37.81	0	63.7	-	-	68.2	-4.5	339	234	H
			5.47	64.59	Pk	34.6	-37.81	0	61.38	-	-	68.2	-6.82	339	234	H
			5.47	47.31	RMS	34.6	-37.81	0	44.1	-	-	-	-	339	234	H
			* 5.45811	47.77	RMS	34.6	-37.75	0	44.62	54	-9.38	-	-	50	259	V
			* 5.45811	47.77	RMS	34.6	-37.75	0	44.62	54	-9.38	-	-	50	259	V
			* 5.458532	62	Pk	34.6	-37.75	0	58.85	-	-	74	-15.15	50	259	V
			* 5.46	59.17	Pk	34.6	-37.72	0	56.05	-	-	68.2	-12.15	50	259	V
			* 5.46	46.47	RMS	34.6	-37.72	0	43.35	54	-10.65	-	-	50	259	V
			5.469932	63.91	Pk	34.6	-37.81	0	60.7	-	-	68.2	-7.5	50	259	V
			5.47	61.5	Pk	34.6	-37.81	0	58.29	-	-	68.2	-9.91	50	259	V
			5.47	46.42	RMS	34.6	-37.81	0	43.21	-	-	-	-	50	259	V
			5.725	58.38	Pk	35.1	-37.88	0	55.6	-	-	68.2	-12.6	335	182	H
			5.726426	60.84	Pk	35.1	-37.9	0	58.04	-	-	68.2	-10.16	335	182	H
			5.725	57.55	Pk	35.1	-37.88	0	54.77	-	-	68.2	-13.43	331	223	V
EHT80 (RU 484 / Index 66)	5610		5.728891	60.12	Pk	35.1	-37.9	0	57.32	-	-	68.2	-10.88	331	223	V
EHT80 (RU 106 / Index 53)	5530	6 + 5	* 5.456932	48.69	RMS	34.6	-37.74	0	45.55	54	-8.45	-	-	16	172	H
			* 5.456932	48.69	RMS	34.6	-37.74	0	45.55	54	-8.45	-	-	16	172	H
			* 5.458977	61.01	Pk	34.6	-37.75	0	57.86	-	-	74	-16.14	16	172	H
			* 5.46	59.53	Pk	34.6	-37.72	0	56.41	-	-	68.2	-11.79	16	172	H
			* 5.46	48.43	RMS	34.6	-37.72	0	45.31	54	-8.69	-	-	16	172	H
			5.469999	66.68	Pk	34.6	-37.81	0	63.47	-	-	68.2	-4.73	16	172	H
			5.47	66.57	Pk	34.6	-37.81	0	63.36	-	-	68.2	-4.84	16	172	H
			5.47	48.01	RMS	34.6	-37.81	0	44.8	-	-	-	-	16	172	H
			* 5.374622	60.09	Pk	34.6	-37.79	0	56.9	-	-	74	-17.1	47	204	V
			* 5.399	47.91	RMS	34.7	-37.71	0	44.9	54	-9.1	-	-	47	204	V
			* 5.399	47.91	RMS	34.7	-37.71	0	44.9	54	-9.1	-	-	47	204	V
			* 5.46	57.65	Pk	34.6	-37.72	0	54.53	-	-	68.2	-13.67	47	204	V
			* 5.46	47.24	RMS	34.6	-37.72	0	44.12	54	-9.88	-	-	47	204	V
			5.469577	65.54	Pk	34.6	-37.81	0	62.33	-	-	68.2	-5.87	47	204	V
			5.47	64.78	Pk	34.6	-37.81	0	61.57	-	-	68.2	-6.63	47	204	V
			5.47	47.06	RMS	34.6	-37.81	0	43.85	-	-	-	-	47	204	V
			5.725	57.29	Pk	35.1	-37.88	0	54.51	-	-	68.2	-13.69	359	198	H
			5.738666	59.38	Pk	35.2	-37.89	0	56.69	-	-	68.2	-11.51	359	198	H
			5.725	56.74	Pk	35.1	-37.88	0	53.96	-	-	68.2	-14.24	330	236	V
EHT80 (RU 106 / Index 60)	5610		5.781024	59.25	Pk	35.2	-37.75	0	56.7	-	-	68.2	-11.5	330	236	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

UNII-2c (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 (RU 242 / Index 61)	5570 (Lower)	6 + 5	* 5.46	56.16	Pk	34.3	-35.5	0	54.96	-	-	68.2	-13.24	316	129	H
			* 5.431399	58.76	Pk	34.4	-35.6	0	57.56	-	-	74	-16.44	316	129	H
			5.47	64.35	Pk	34.3	-35.6	0	63.05	-	-	68.2	-5.15	316	129	H
			5.469977	64.93	Pk	34.3	-35.6	0	63.63	-	-	68.2	-4.57	316	129	H
			* 5.46	44.49	RMS	34.3	-35.5	0	43.29	54	-10.71	-	-	316	129	H
			* 5.397733	46.09	RMS	34.4	-35.5	0	44.99	54	-9.01	-	-	316	129	H
			5.47	44.78	RMS	34.3	-35.6	0	43.48	-	-	-	-	316	129	H
			* 5.397733	46.09	RMS	34.4	-35.5	0	44.99	54	-9.01	-	-	316	129	H
			* 5.46	55.67	Pk	34.3	-35.5	0	54.47	-	-	68.2	-13.73	355	246	V
			* 5.45431	58.18	Pk	34.3	-35.47	0	57.01	-	-	74	-16.99	355	246	V
			5.47	56.63	Pk	34.3	-35.6	0	55.33	-	-	68.2	-12.87	355	246	V
			5.468421	57.86	Pk	34.3	-35.6	0	56.56	-	-	68.2	-11.64	355	246	V
			* 5.46	44.77	RMS	34.3	-35.5	0	43.57	54	-10.43	-	-	355	246	V
			* 5.370533	46.28	RMS	34.4	-35.6	0	45.08	54	-8.92	-	-	355	246	V
			5.47	45.46	RMS	34.3	-35.6	0	44.16	-	-	-	-	355	246	V
			* 5.370533	46.28	RMS	34.4	-35.6	0	45.08	54	-8.92	-	-	355	246	V
EHT160 (RU 242 / Index S64)	5570 (Upper)		5.725	57.77	Pk	35.1	-37.88	0	54.99	-	-	68.2	-13.21	303	198	H
			5.734388	59.93	Pk	35.1	-37.91	0	57.12	-	-	68.2	-11.08	303	198	H
			5.725	56.56	Pk	35.1	-37.88	0	53.78	-	-	68.2	-14.42	322	200	V
			5.738071	59.64	Pk	35.2	-37.9	0	56.94	-	-	68.2	-11.26	322	200	V
			5.46	59.64	Pk	35	-38.6	0	56.04	-	-	68.2	-12.16	331	222	H
EHT160 (RU 52 / Index 37)	5570 (Lower)	6 + 5	5.416444	61.02	Pk	35	-38.63	0	57.39	-	-	74	-16.61	331	222	H
			5.47	62.67	Pk	35	-38.56	0	59.11	-	-	68.2	-9.09	331	222	H
			5.469821	64.08	Pk	35	-38.57	0	60.51	-	-	68.2	-7.69	331	222	H
			5.46	47.6	RMS	35	-38.6	0	44	54	-10	-	-	331	222	H
			5.454888	48.68	RMS	35	-38.64	0	45.04	54	-8.96	-	-	331	222	H
			5.47	48.78	RMS	35	-38.56	0	45.22	-	-	-	-	331	222	H
			5.454888	48.68	RMS	35	-38.64	0	45.04	54	-8.96	-	-	331	222	H
			5.46	57.72	Pk	35	-38.6	0	54.12	-	-	68.2	-14.08	308	178	V
			5.386577	60.85	Pk	35	-38.68	0	57.17	-	-	74	-16.83	308	178	V
			5.47	62.46	Pk	35	-38.56	0	58.9	-	-	68.2	-9.3	308	178	V
			5.469999	62.69	Pk	35	-38.56	0	59.13	-	-	68.2	-9.07	308	178	V
			5.46	46.71	RMS	35	-38.6	0	43.11	54	-10.89	-	-	308	178	V
			5.397244	48.09	RMS	35	-38.7	0	44.39	54	-9.61	-	-	308	178	V
			5.47	47.54	RMS	35	-38.56	0	43.98	-	-	-	-	308	178	V
			5.397244	48.09	RMS	35	-38.7	0	44.39	54	-9.61	-	-	308	178	V
EHT160 (RU 52 / Index S52)	5570 (Upper)		5.725	58.7	Pk	35.1	-37.88	0	55.92	-	-	68.2	-12.28	327	183	H
			5.801396	65.1	Pk	35.2	-37.72	0	62.58	-	-	68.2	-5.62	327	183	H
			5.725	56.82	Pk	35.1	-37.88	0	54.04	-	-	68.2	-14.16	329	182	V
			5.736966	59.42	Pk	35.2	-37.89	0	56.73	-	-	68.2	-11.47	329	182	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

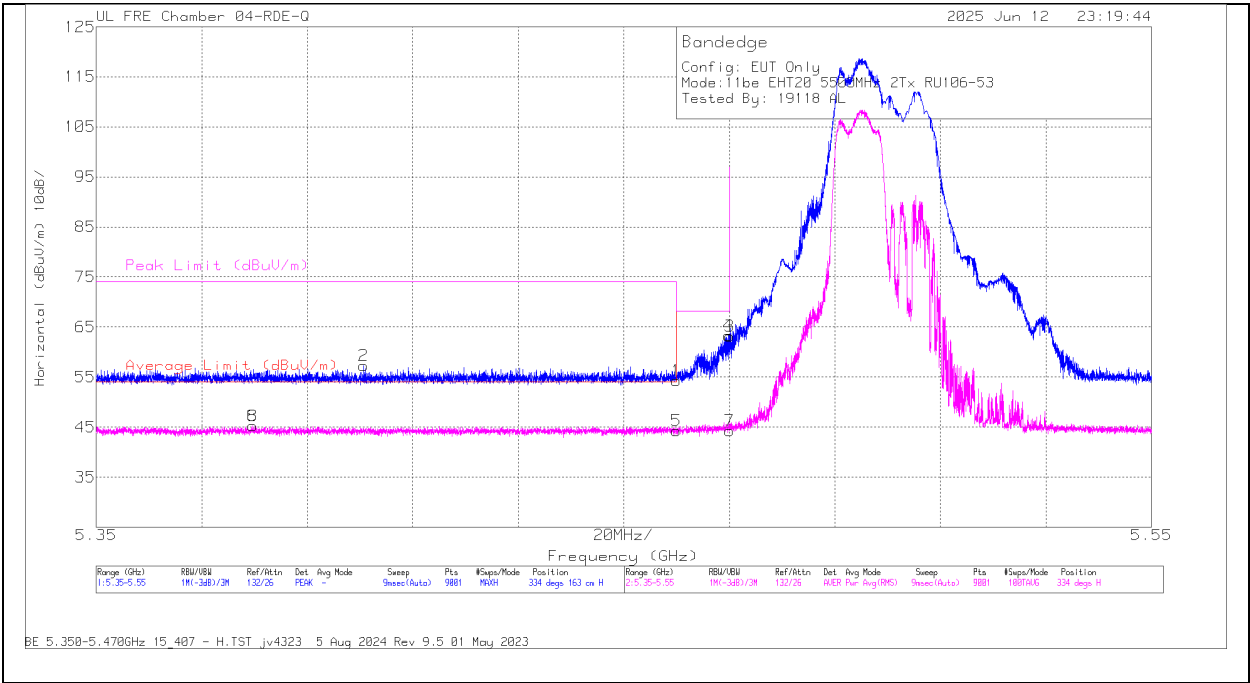
Pk - Peak detector

RMS - RMS detection

2TX Antenna 6 + Antenna 5 OFDMA MODE: PARTIAL RU 106

BANDEDGE (LOW CHANNEL / 5500MHz)

HORIZONTAL RESULT



Trace Markers

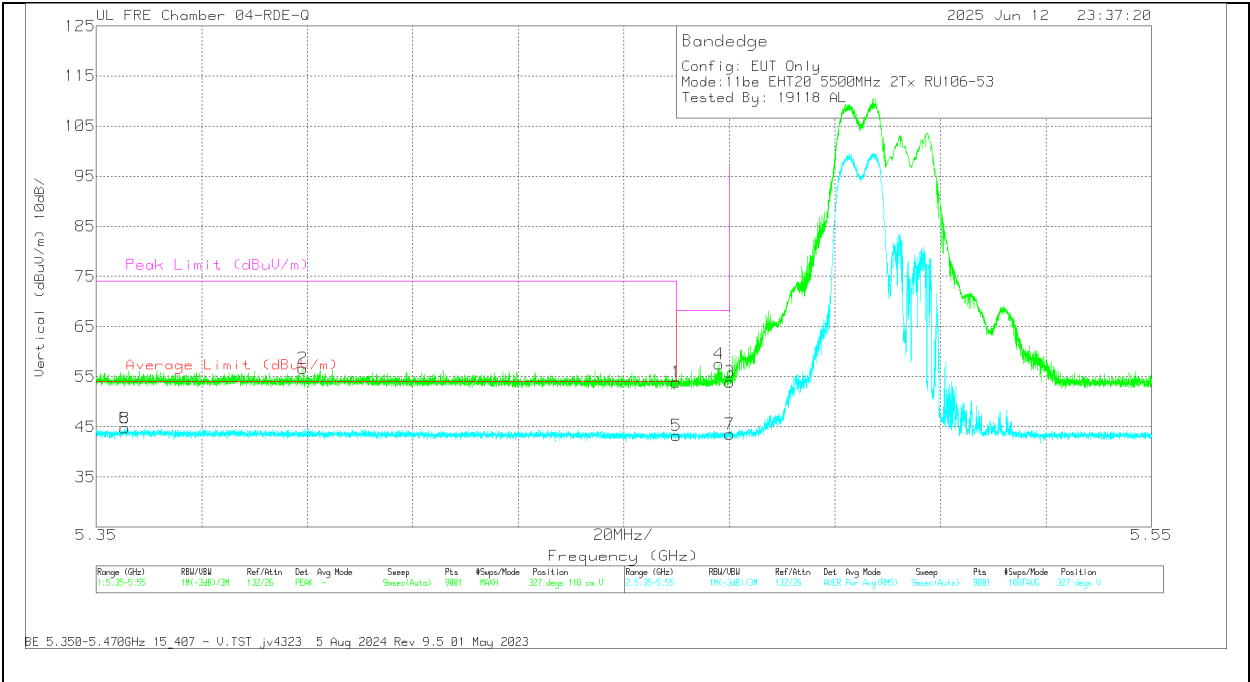
Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	5.379689	47.17	RMS	34.6	0	-36.55	45.22	54	-8.78	-	-	334	163	H
8	5.379689	47.17	RMS	34.6	0	-36.55	45.22	54	-8.78	-	-	334	163	H
2	5.400733	59.17	Pk	34.6	0	-36.53	57.24	-	-	74	-16.76	334	163	H
1	5.46	56.3	Pk	34.5	0	-36.55	54.25	-	-	68.2	-13.95	334	163	H
5	5.46	46.32	RMS	34.5	0	-36.55	44.27	54	-9.73	-	-	334	163	H
4	5.469821	65.25	Pk	34.5	0	-36.45	63.3	-	-	68.2	-4.9	334	163	H
3	5.47	65.12	Pk	34.5	0	-36.46	63.16	-	-	68.2	-5.04	334	163	H
7	5.47	46.26	RMS	34.5	0	-36.46	44.3	-	-	-	-	334	163	H

Pk - Peak detector
RMS - RMS detection

2TX Antenna 6 + Antenna 5 OFDMA MODE: PARTIAL RU 106

BANDEDGE (LOW CHANNEL / 5500MHz)

VERTICAL RESULT



Trace Markers

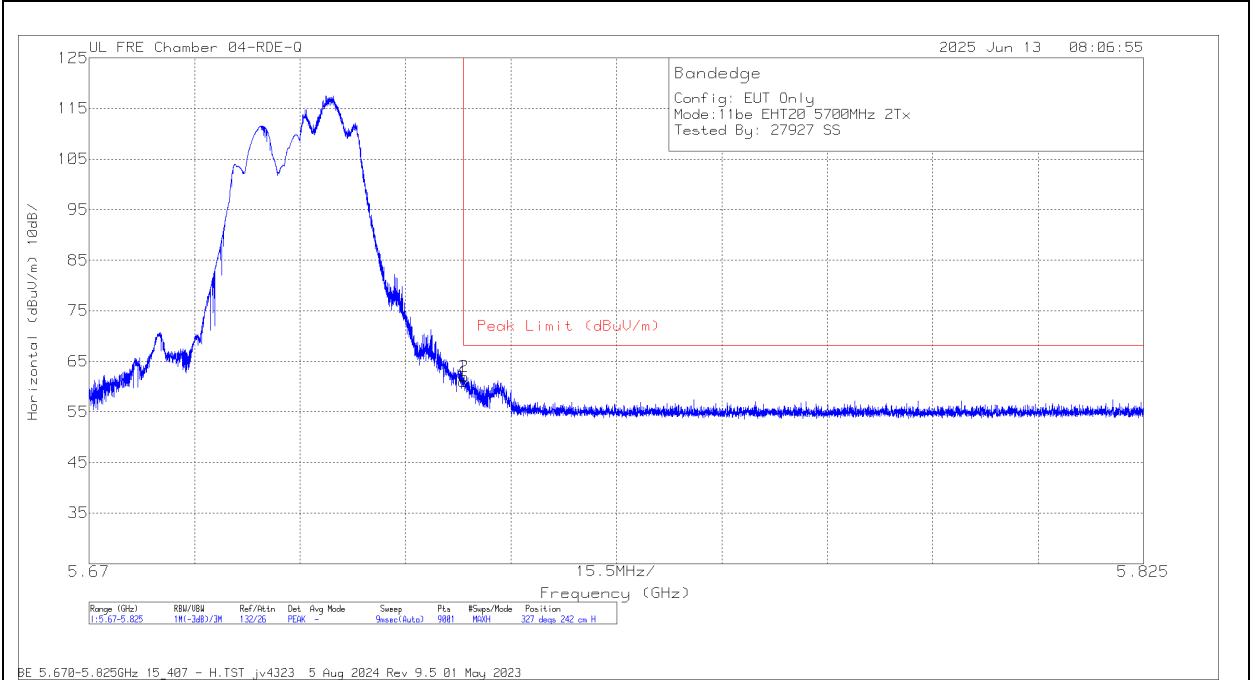
Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	5.355467	46.71	RMS	34.6	0	-36.59	44.72	54	-9.28	-	-	327	118	V
8	5.355467	46.71	RMS	34.6	0	-36.59	44.72	54	-9.28	-	-	327	118	V
2	5.389222	58.64	Pk	34.6	0	-36.56	56.68	-	-	74	-17.32	327	118	V
1	5.46	55.99	Pk	34.5	0	-36.55	53.94	-	-	68.2	-14.26	327	118	V
5	5.46	45.27	RMS	34.5	0	-36.55	43.22	54	-10.78	-	-	327	118	V
4	5.468065	59.46	Pk	34.5	0	-36.44	57.52	-	-	68.2	-10.68	327	118	V
3	5.47	55.82	Pk	34.5	0	-36.46	53.86	-	-	68.2	-14.34	327	118	V
7	5.47	45.51	RMS	34.5	0	-36.46	43.55	-	-	-	-	327	118	V

Pk - Peak detector
RMS - RMS detection

2TX Antenna 6 + Antenna 5 OFDMA MODE: Partial RU 106

BANDEDGE (HIGH CHANNEL / 5700MHz)

HORIZONTAL RESULT



Trace Markers

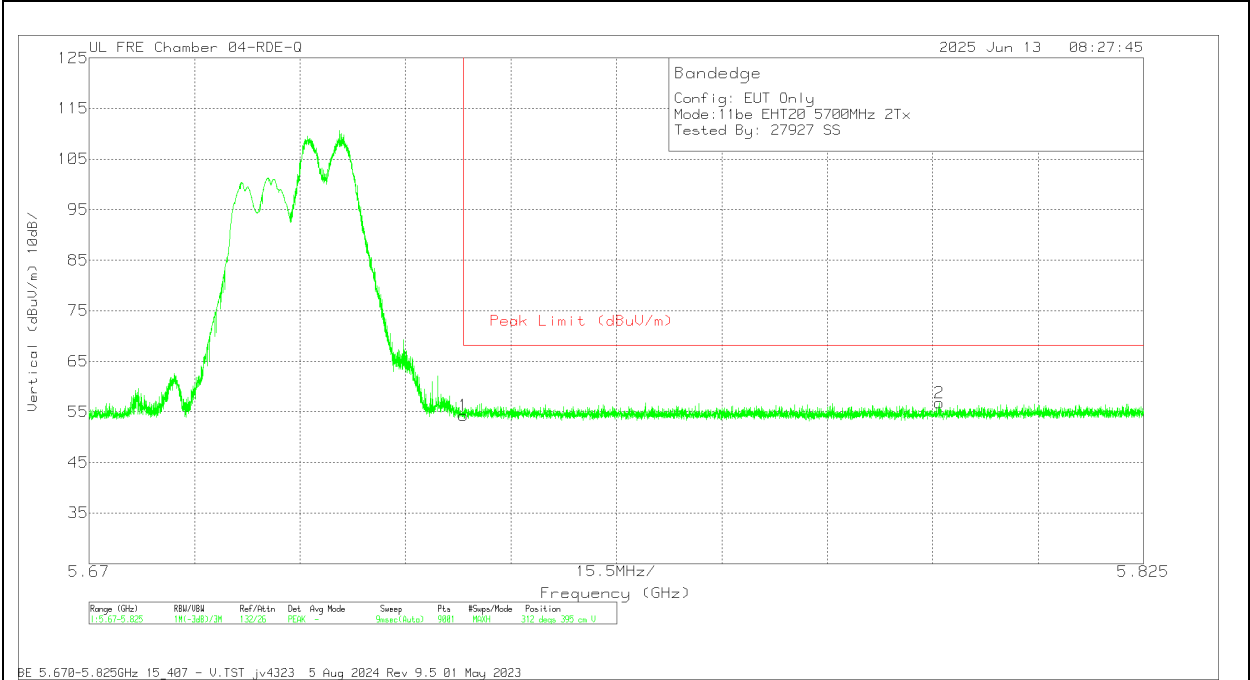
Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	62.3	Pk	34.8	0	-36.16	60.94	68.2	-7.26	327	242	H
2	5.72511	63.33	Pk	34.8	0	-36.16	61.97	68.2	-6.23	327	242	H

Pk - Peak detector

2TX Antenna 6 + Antenna 5 OFDMA MODE: Partial RU 106

BANDEDGE (HIGH CHANNEL / 5700MHz)

VERTICAL RESULT



Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	55.7	Pk	34.8	0	-36.16	54.34	68.2	-13.86	312	395	V
2	5.794997	57.96	Pk	34.9	0	-36.07	56.79	68.2	-11.41	312	395	V

Pk - Peak detector

10.1.23. 802.11n/ac MIMO MODE IN UNII-2C BAND – SPURIOUS EMISSIONS

20MHz

UNII-2c (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5500	6 + 5	* 10.99911	53.62	PK-U	37.7	-40.7	0	50.62	-	-	74	-23.38	81	101	H
			* 11.015106	41.62	ADR	37.8	-40.7	0	38.72	54	-15.28	-	-	81	101	H
			* 1.209672	60.7	PK-U	28.6	-48.8	0	40.5	-	-	74	-33.5	249	243	H
			* 1.214938	49.43	ADR	28.6	-48.8	0	29.23	54	-24.77	-	-	249	243	H
			* 1.21474	60.73	PK-U	28.6	-48.8	0	40.53	-	-	74	-33.47	81	360	V
			* 1.210713	49.29	ADR	28.6	-48.9	0	28.99	54	-25.01	-	-	81	360	V
			* 3.511363	56.16	PK-U	32.7	-45.3	0	43.56	-	-	74	-30.44	249	200	H
			* 3.536037	44.56	ADR	32.7	-45.1	0	32.16	54	-21.84	-	-	249	200	H
			13.218247	51.83	PK-U	38.9	-39.5	0	51.23	-	-	68.2	-16.97	81	101	V
			2.954957	56.7	PK-U	32.7	-46.2	0	43.2	-	-	68.2	-25	81	200	V
	5580	6 + 5	* 2.340023	57.33	PK-U	31.8	-46.59	0	42.54	-	-	74	-31.46	9	198	H
			* 2.339001	45.39	ADR	31.8	-46.57	0	30.62	54	-23.38	-	-	9	198	H
			* 3.639312	54.87	PK-U	33	-44.78	0	43.09	-	-	74	-30.91	96	337	H
			* 3.639759	43.46	ADR	33	-44.77	0	31.69	54	-22.31	-	-	96	337	H
			* 2.344879	57.27	PK-U	31.8	-46.68	0	42.39	-	-	74	-31.61	282	206	V
			* 2.343081	45.49	ADR	31.8	-46.65	0	30.64	54	-23.36	-	-	282	206	V
			* 3.643526	55.35	PK-U	33	-44.73	0	43.62	-	-	74	-30.38	107	240	V
			* 3.642246	43.85	ADR	33	-44.71	0	32.14	54	-21.86	-	-	107	240	V
			* 8.309396	51.96	PK-U	35.7	-41.07	0	46.59	-	-	74	-27.41	108	197	H
			* 8.250063	40.86	ADR	35.7	-41.26	0	35.3	54	-18.7	-	-	108	197	H
	5700	6 + 5	* 8.490406	51.99	PK-U	35.7	-40.61	0	47.08	-	-	74	-26.92	107	196	V
			* 8.489559	40.65	ADR	35.7	-40.63	0	35.72	54	-18.28	-	-	107	196	V
			* 2.795179	56.59	PK-U	32.2	-46.11	0	42.68	-	-	74	-31.32	122	260	H
			* 2.795979	45.3	ADR	32.2	-46.13	0	31.37	54	-22.63	-	-	122	260	H
			* 3.948415	55.36	PK-U	33.5	-44.76	0	44.1	-	-	74	-29.9	244	282	H
			* 3.948452	43.45	ADR	33.5	-44.76	0	32.19	54	-21.81	-	-	244	282	H
			* 2.794566	56.61	PK-U	32.2	-46.09	0	42.72	-	-	74	-31.28	9	243	V
			* 2.794388	44.96	ADR	32.2	-46.09	0	31.07	54	-22.93	-	-	9	243	V
			* 3.948235	55.06	PK-U	33.5	-44.76	0	43.8	-	-	74	-30.2	178	274	V
			* 3.94547	43.79	ADR	33.4	-44.79	0	32.4	54	-21.6	-	-	178	274	V
	5720	6 + 5	* 10.970947	52.14	PK-U	37.9	-40.48	0	49.56	-	-	74	-24.44	332	126	H
			* 10.971864	40.88	ADR	37.9	-40.45	0	38.33	54	-15.67	-	-	332	126	H
			* 10.984537	52.37	PK-U	37.9	-40.45	0	49.82	-	-	74	-24.18	123	194	V
			* 10.9861	40.96	ADR	37.9	-40.42	0	38.44	54	-15.56	-	-	123	194	V
			1.851661	57.13	PK-U	30.3	-46.62	0	40.81	-	-	68.2	-27.39	170	350	V
			1.855227	58.07	PK-U	30.3	-46.57	0	41.8	-	-	68.2	-26.4	120	304	H
			3.154501	55.87	PK-U	32.9	-45.41	0	43.36	-	-	68.2	-24.84	240	305	H
			3.15697	55.98	PK-U	32.9	-45.43	0	43.45	-	-	68.2	-24.75	181	374	V
	5720	6 + 5	9.964405	53.67	PK-U	37.3	-41.17	0	49.8	-	-	68.2	-18.4	313	151	H
			9.967348	52.99	PK-U	37.3	-41.26	0	49.03	-	-	68.2	-19.17	20	271	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-2c (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5510	6 + 5	* 1.507471	57.36	PK-U	28.1	-46.19	0	39.27	-	-	74	-34.73	71	199	V
			* 1.508654	45.67	ADR	28.1	-46.18	0	27.59	54	-26.41	-	-	71	199	V
			* 7.696673	52.34	PK-U	35.7	-41.79	0	46.25	-	-	74	-27.75	226	305	H
			* 7.697427	40.58	ADR	35.7	-41.78	0	34.5	54	-19.5	-	-	226	305	H
			2.054382	57.29	PK-U	31.4	-46.5	0	42.19	-	-	68.2	-26.01	0	100	H
			2.566128	57.72	PK-U	32.4	-46.55	0	43.57	-	-	68.2	-24.63	226	260	V
			3.170473	55.61	PK-U	32.9	-45.3	0	43.21	-	-	68.2	-24.99	71	400	H
			9.961921	52.99	PK-U	37.3	-41.07	0	49.22	-	-	68.2	-18.98	326	272	V
			* 1.262949	57.96	PK-U	29	-46.44	0	40.52	-	-	74	-33.48	82	128	H
	5550	6 + 5	* 1.263959	44.99	ADR	29	-46.42	0	27.57	54	-26.43	-	-	82	128	H
			* 3.984389	54.71	PK-U	33.5	-45.1	0	43.11	-	-	74	-30.89	256	168	H
			* 3.988119	42.84	ADR	33.5	-44.99	0	31.35	54	-22.65	-	-	256	168	H
			* 1.265501	58.35	PK-U	29	-46.43	0	40.92	-	-	74	-33.08	211	324	V
			* 1.262882	46.6	ADR	29	-46.44	0	29.16	54	-24.84	-	-	211	324	V
			* 3.952514	54.49	PK-U	33.5	-44.75	0	43.24	-	-	74	-30.76	117	228	V
			* 3.952539	43.23	ADR	33.5	-44.75	0	31.98	54	-22.02	-	-	117	228	V
			* 11.510032	53.1	PK-U	38	-40.25	0	50.85	-	-	74	-23.15	334	263	H
			* 11.508357	40.85	ADR	38	-40.2	0	38.65	54	-15.35	-	-	334	263	H
			* 11.504114	52.29	PK-U	38	-40.1	0	50.19	-	-	74	-23.81	266	154	V
			* 11.502275	41.05	ADR	38	-40.12	0	38.93	54	-15.07	-	-	266	154	V
			* 1.265542	59.95	PK-U	29.3	-47.9	0	41.35	-	-	74	-32.65	1	200	H
	5670	6 + 5	* 1.267319	48.47	ADR	29.3	-47.9	0	29.87	54	-24.13	-	-	1	200	H
			* 3.928839	55.54	PK-U	33.3	-45.8	0	43.04	-	-	74	-30.96	1	101	H
			* 3.927181	43.95	ADR	33.3	-45.8	0	31.45	54	-22.55	-	-	1	101	H
			* 1.269254	59.94	PK-U	29.3	-47.83	0	41.41	-	-	74	-32.59	1	199	V
			* 1.26969	48.19	ADR	29.3	-47.87	0	29.62	54	-24.38	-	-	1	199	V
			* 3.924616	56.44	PK-U	33.3	-45.9	0	43.84	-	-	74	-30.16	1	199	V
			* 3.92573	44.22	ADR	33.3	-45.83	0	31.69	54	-22.31	-	-	1	199	V
			* 11.533514	55.8	PK-U	38.3	-43	0	51.1	-	-	74	-22.9	1	199	H
			* 11.534625	44.3	ADR	38.3	-43	0	39.6	54	-14.4	-	-	1	199	H
			* 11.538955	55.52	PK-U	38.3	-43	0	50.82	-	-	74	-23.18	1	101	V
			* 11.537399	44.26	ADR	38.3	-43.1	0	39.46	54	-14.54	-	-	1	101	V
			* 1.271572	60.42	PK-U	29.3	-47.9	0	41.82	-	-	74	-32.18	0	198	H
	5710 (Straddle)	6 + 5	* 1.273486	48.81	ADR	29.3	-47.85	0	30.26	54	-23.74	-	-	0	198	H
			* 3.860781	55.78	PK-U	33.1	-45.8	0	43.08	-	-	74	-30.92	0	198	H
			* 3.85966	43.88	ADR	33.1	-45.8	0	31.18	54	-22.82	-	-	0	198	H
			* 1.280052	59.7	PK-U	29.4	-47.89	0	41.21	-	-	74	-32.79	0	101	V
			* 1.27976	47.9	ADR	29.4	-47.9	0	29.4	54	-24.6	-	-	0	101	V
			* 3.861982	55.6	PK-U	33.1	-45.8	0	42.9	-	-	74	-31.1	0	199	V
			* 3.863511	43.91	ADR	33.1	-45.85	0	31.16	54	-22.84	-	-	0	199	V
			* 11.436884	55.76	PK-U	38.2	-43.6	0	50.36	-	-	74	-23.64	0	101	H
			* 11.439917	44.06	ADR	38.2	-43.6	0	38.66	54	-15.34	-	-	0	101	H
			* 11.442709	55.62	PK-U	38.2	-43.6	0	50.22	-	-	74	-23.78	0	101	V
			* 11.440377	44.16	ADR	38.2	-43.6	0	38.76	54	-15.24	-	-	0	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-2c (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5530	6 + 5	* 1.28988	61.91	PK-U	28.5	-49.5	0	40.91	-	-	74	-33.09	360	101	H
			* 1.292242	50.26	ADR	28.5	-49.58	0	29.18	54	-24.82	-	-	360	101	H
			* 4.039967	56.99	PK-U	33.4	-47	0	43.39	-	-	74	-30.61	360	101	H
			* 4.040243	45.2	ADR	33.4	-47	0	31.6	54	-22.4	-	-	360	101	H
			* 4.040897	57.58	PK-U	33.4	-47	0	43.98	-	-	74	-30.02	360	101	H
			* 4.038889	45.2	ADR	33.4	-46.91	0	31.69	54	-22.31	-	-	360	101	H
			* 1.068617	62.04	PK-U	27.4	-49.74	0	39.7	-	-	74	-34.3	360	101	V
			* 1.070145	50.15	ADR	27.4	-49.59	0	27.96	54	-26.04	-	-	360	101	V
			* 4.672211	58.2	PK-U	34.1	-48.1	0	44.2	-	-	74	-29.8	360	101	V
			* 4.671327	46.36	ADR	34.1	-48.03	0	32.43	54	-21.57	-	-	360	101	V
			16.526758	54.77	PK-U	41.4	-42.1	0	54.07	-	-	68.2	-14.13	360	200	V
			17.032423	53.71	PK-U	41.8	-41.7	0	53.81	-	-	68.2	-14.39	360	200	H
	5610	6 + 5	* 1.23545	61.83	PK-U	28.5	-49.75	0	40.58	-	-	74	-33.42	360	101	H
			* 1.23651	50.48	ADR	28.5	-49.7	0	29.28	54	-24.72	-	-	360	101	H
			* 1.234737	62.36	PK-U	28.5	-49.8	0	41.06	-	-	74	-32.94	360	101	V
			* 1.233902	50.46	ADR	28.5	-49.8	0	29.16	54	-24.84	-	-	360	101	V
			2.905449	59.78	PK-U	32.6	-48.3	0	44.08	-	-	68.2	-24.12	360	101	V
			3.344513	57.2	PK-U	32.8	-47.2	0	42.8	-	-	68.2	-25.4	360	101	H
			17.064912	53.7	PK-U	41.8	-41.21	0	54.29	-	-	68.2	-13.91	360	200	H
			17.073173	53.4	PK-U	41.8	-41.2	0	54	-	-	68.2	-14.2	360	200	V
			* 1.28848	62.15	PK-U	28.5	-49.5	0	41.15	-	-	74	-32.85	360	100	H
			* 1.29023	50.06	ADR	28.5	-49.52	0	29.04	54	-24.96	-	-	360	100	H
			* 2.784874	59.65	PK-U	32.3	-48.81	0	43.14	-	-	74	-30.86	360	200	H
			* 2.784996	47.84	ADR	32.3	-48.8	0	31.34	54	-22.66	-	-	360	200	H
	5690 (Straddle)	6 + 5	* 1.241881	61.52	PK-U	28.5	-49.71	0	40.31	-	-	74	-33.69	360	101	V
			* 1.242875	49.93	ADR	28.5	-49.79	0	28.64	54	-25.36	-	-	360	101	V
			* 2.771397	59.17	PK-U	32.3	-48.9	0	42.57	-	-	74	-31.43	360	101	V
			* 2.772962	47.53	ADR	32.3	-48.9	0	30.93	54	-23.07	-	-	360	101	V
			17.025919	53.63	PK-U	41.9	-41.5	0	54.03	-	-	68.2	-14.17	360	199	V
			17.0566	54.26	PK-U	41.8	-41.26	0	54.8	-	-	68.2	-13.4	360	199	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

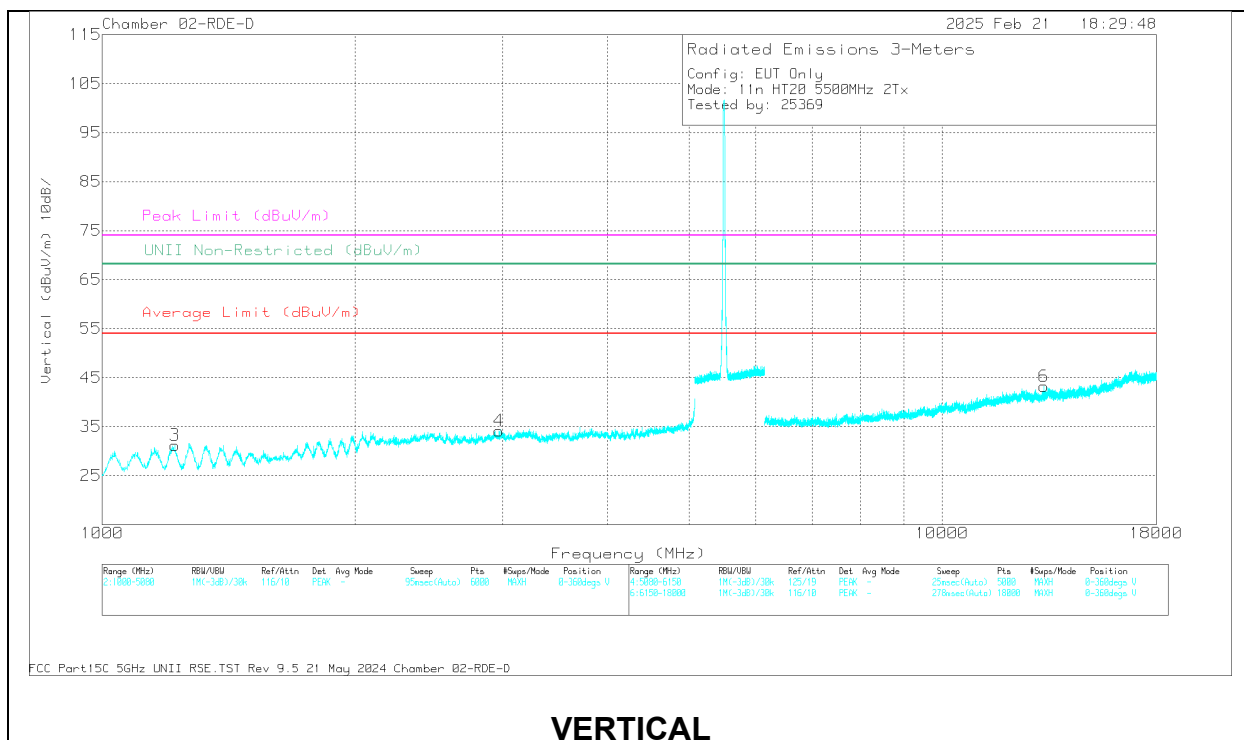
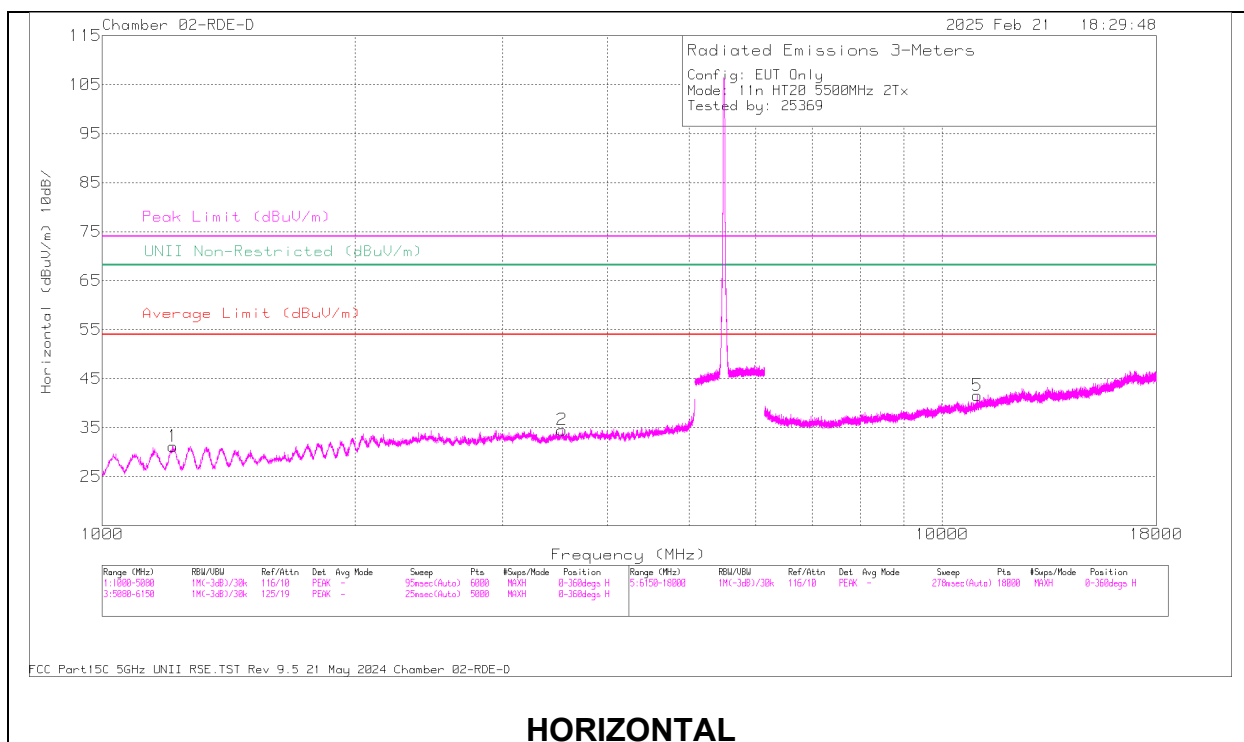
160MHz

UNII-2c (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5570	6 + 5	* 11.142328	54.85	PK-U	37.9	-44.23	0	48.52	-	-	74	-25.48	66	308	H
			* 11.140577	42.87	ADR	37.9	-44.2	0	36.57	54	-17.43	-	-	66	308	H
			* 11.143092	55.24	PK-U	37.9	-44.3	0	48.84	-	-	74	-25.16	120	226	V
			* 11.14278	42.89	ADR	37.9	-44.28	0	36.51	54	-17.49	-	-	120	226	V
			2.398939	60.87	PK-U	32.1	-49.4	0	43.57	-	-	68.2	-24.63	331	225	H
			2.401077	60.79	PK-U	32.2	-49.5	0	43.49	-	-	68.2	-24.71	226	177	V
			16.711041	55.3	PK-U	41.8	-42.8	0	54.3	-	-	68.2	-13.9	139	205	V
			16.711733	55.08	PK-U	41.8	-42.8	0	54.08	-	-	68.2	-14.12	49	217	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5500MHz)

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	200896 ACF(dB/m)	Amp/Cbl/Filtr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 10.99911	53.62	PK-U	37.7	-40.7	0	50.62	-	-	74	-23.38	81	101	H
5	* 11.015106	41.62	ADR	37.8	-40.7	0	38.72	54	-15.28	-	-	81	101	H
1	* 1.209672	60.7	PK-U	28.6	-48.8	0	40.5	-	-	74	-33.5	249	243	H
1	* 1.214938	49.43	ADR	28.6	-48.8	0	29.23	54	-24.77	-	-	249	243	H
3	* 1.21474	60.73	PK-U	28.6	-48.8	0	40.53	-	-	74	-33.47	81	360	V
3	* 1.210713	49.29	ADR	28.6	-48.9	0	28.99	54	-25.01	-	-	81	360	V
2	* 3.511363	56.16	PK-U	32.7	-45.3	0	43.56	-	-	74	-30.44	249	200	H
2	* 3.536037	44.56	ADR	32.7	-45.1	0	32.16	54	-21.84	-	-	249	200	H
6	13.218247	51.83	PK-U	38.9	-39.5	0	51.23	-	-	68.2	-16.97	81	101	V
4	2.954957	56.7	PK-U	32.7	-46.2	0	43.2	-	-	68.2	-25	81	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

10.1.24. 802.11be MIMO MODE IN UNII-2C BAND – SPURIOUS EMISSIONS

20MHz

UNII-2c (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5500	6 + 5	* 1.10313	60.61	PK-U	27.6	-49.1	0	39.11	-	-	74	-34.89	1	200	V
			* 1.10385	48.87	ADR	27.6	-49.1	0	27.37	54	-26.63	-	-	1	200	V
			* 8.493472	53.38	PK-U	36	-42.1	0	47.28	-	-	74	-26.72	1	200	H
			* 8.487463	41.95	ADR	36	-42.2	0	35.75	54	-18.25	-	-	1	200	H
			2.51388	58.03	PK-U	32.4	-47.7	0	42.73	-	-	68.2	-25.47	1	101	H
			3.165595	56.5	PK-U	33	-45.5	0	44	-	-	68.2	-24.2	1	200	V
			9.210694	53.47	PK-U	36.4	-41.8	0	48.07	-	-	68.2	-20.13	1	101	V
			13.425496	52.48	PK-U	38.8	-39.3	0	51.98	-	-	68.2	-16.22	1	101	H
	5580	6 + 5	17.108362	51.4	PK-U	41.4	-37.7	0	55.1	-	-	68.2	-13.1	1	200	V
			* 11.259824	41.35	ADR	38.4	-40.8	0	38.95	54	-15.05	-	-	0	200	V
			* 11.28081	52.92	PK-U	38.4	-40.8	0	50.52	-	-	74	-23.48	0	200	V
			* 12.506778	40.7	ADR	39	-39.2	0	40.5	54	-13.5	-	-	0	200	H
			* 12.512063	52.84	PK-U	39	-39.7	0	52.14	-	-	74	-21.86	0	200	H
			* 1.38658	49.42	ADR	28.5	-48.8	0	29.12	54	-24.88	-	-	0	101	H
			* 1.38834	61.3	PK-U	28.5	-48.9	0	40.9	-	-	74	-33.1	0	101	H
			* 7.50381	41.57	ADR	35.7	-42.7	0	34.57	54	-19.43	-	-	0	200	V
			* 7.505113	53.21	PK-U	35.7	-42.7	0	46.21	-	-	74	-27.79	0	200	V
			16.715801	51.4	PK-U	41.6	-38.1	0	54.9	-	-	68.2	-13.3	0	101	H
			3.181402	56.49	PK-U	33	-45.5	0	43.99	-	-	68.2	-24.21	0	200	V
	5700	6 + 5	* 11.271626	52.66	PK-U	38.4	-40.6	0	50.46	-	-	74	-23.54	1	199	H
			* 11.301848	41.33	ADR	38.4	-40.5	0	39.23	54	-14.77	-	-	1	199	H
			* 15.356346	51.75	PK-U	39.6	-38.6	0	52.75	-	-	74	-21.25	1	101	H
			* 15.353124	40.27	ADR	39.6	-38.7	0	41.17	54	-12.83	-	-	1	101	H
			2.034936	60.51	PK-U	31.4	-48.8	0	43.11	-	-	68.2	-25.09	1	101	H
			2.647542	58.33	PK-U	31.9	-47.5	0	42.73	-	-	68.2	-25.47	1	101	V
			9.543119	53.97	PK-U	36.7	-41.7	0	48.97	-	-	68.2	-19.23	1	200	V
			16.572608	52.02	PK-U	41.1	-38.3	0	54.82	-	-	68.2	-13.38	1	200	V
	5720	6 + 5	* 1.385627	49.28	ADR	28.5	-48.8	0	28.98	54	-25.02	-	-	0	199	H
			* 1.39042	61.44	PK-U	28.5	-48.8	0	41.14	-	-	74	-32.86	0	199	H
			* 9.13596	41.67	ADR	36.3	-41.8	0	36.17	54	-17.83	-	-	0	101	V
			* 9.152329	54.46	PK-U	36.3	-41.7	0	49.06	-	-	74	-24.94	0	101	V
			10.132516	53.45	PK-U	37.3	-41.5	0	49.25	-	-	68.2	-18.95	0	101	H
			15.097378	52.55	PK-U	39.4	-38.4	0	53.55	-	-	68.2	-14.65	0	101	H
			16.796039	52.6	PK-U	41.7	-38	0	56.3	-	-	68.2	-11.9	0	101	V
			1.813518	60.18	PK-U	30	-48.5	0	41.68	-	-	68.2	-26.52	0	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

UNII-2c (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filt/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (RU 106 / Highest PSD)	5500 (Mid Index)	6 + 5	* 1.278883	59.95	PK-U	29.5	-47.81	0	41.64	-	-	74	-32.36	128	254	H
			* 1.278199	48.5	ADR	29.5	-47.83	0	30.17	54	-23.83	-	-	128	254	H
			* 1.278625	60.03	PK-U	29.5	-47.82	0	41.71	-	-	74	-32.29	219	223	V
			* 1.27588	48.47	ADR	29.5	-47.87	0	30.1	54	-23.9	-	-	219	223	V
			* 11.049649	56.94	PK-U	37.8	-44.79	0	49.95	-	-	74	-24.05	315	300	H
			* 11.052147	45.3	ADR	37.8	-44.83	0	38.27	54	-15.73	-	-	315	300	H
			* 11.051966	56.43	PK-U	37.8	-44.84	0	49.39	-	-	74	-24.61	295	176	V
			* 11.052432	45.1	ADR	37.8	-44.81	0	38.09	54	-15.91	-	-	295	176	V
			16.575839	55.15	PK-U	41.1	-41.68	0	54.57	-	-	68.2	-13.63	133	231	H
			16.576028	54.99	PK-U	41.1	-41.68	0	54.41	-	-	68.2	-13.79	112	219	V
			1.907848	59.43	PK-U	31.1	-48.06	0	42.47	-	-	68.2	-25.73	289	116	H
			1.905358	59.86	PK-U	31	-48.01	0	42.85	-	-	68.2	-25.35	270	140	V
	5580 (High Index)	6 + 5	* 3.87326	56.82	PK-U	33.4	-46.37	0	43.85	-	-	74	-30.15	185	230	H
			* 3.873292	44.95	ADR	33.4	-46.37	0	31.98	54	-22.02	-	-	185	230	H
			* 3.873124	57.3	PK-U	33.4	-46.36	0	44.34	-	-	74	-29.66	175	246	V
			* 3.876129	44.97	ADR	33.4	-46.31	0	32.06	54	-21.94	-	-	175	246	V
			* 11.131735	56.01	PK-U	37.8	-44.16	0	49.65	-	-	74	-24.35	313	279	H
			* 11.131397	44.39	ADR	37.8	-44.18	0	38.01	54	-15.99	-	-	313	279	H
			* 11.130966	55.47	PK-U	37.8	-44.21	0	49.06	-	-	74	-24.94	345	255	V
			* 11.130622	44.3	ADR	37.8	-44.21	0	37.89	54	-16.11	-	-	345	255	V
			* 1.274735	59.9	PK-U	29.5	-47.87	0	41.53	-	-	74	-32.47	116	130	H
			* 1.273144	48.12	ADR	29.5	-47.85	0	29.77	54	-24.23	-	-	116	130	H
			* 1.274509	62.36	PK-U	29.5	-47.87	0	43.99	-	-	74	-30.01	176	313	V
			* 1.276975	48.6	ADR	29.5	-47.84	0	30.26	54	-23.74	-	-	176	313	V
	5700 (High Index)	6 + 5	* 3.872145	56.44	PK-U	33.4	-46.41	0	43.43	-	-	74	-30.57	224	153	H
			* 3.873518	45.07	ADR	33.4	-46.38	0	32.09	54	-21.91	-	-	224	153	H
			* 3.873458	56.68	PK-U	33.4	-46.38	0	43.7	-	-	74	-30.3	238	328	V
			* 3.871184	44.96	ADR	33.4	-46.47	0	31.89	54	-22.11	-	-	238	328	V
			* 11.147052	55.93	PK-U	37.8	-44.38	0	49.35	-	-	74	-24.65	323	188	H
			* 11.148213	44.23	ADR	37.8	-44.32	0	37.71	54	-16.29	-	-	323	188	H
			* 11.151771	55.85	PK-U	37.8	-44.32	0	49.33	-	-	74	-24.67	293	230	V
			* 11.150813	44.28	ADR	37.8	-44.38	0	37.7	54	-16.3	-	-	293	230	V
			1.918421	59.39	PK-U	31.1	-48.08	0	42.41	-	-	68.2	-25.79	224	115	H
			1.919489	59.29	PK-U	31.1	-48.08	0	42.31	-	-	68.2	-25.89	281	165	V
			* 4.044167	56.67	PK-U	33.5	-46.35	0	43.82	-	-	74	-30.18	199	141	H
			* 4.043497	44.63	ADR	33.5	-46.31	0	31.82	54	-22.18	-	-	199	141	H
	5720 (High Index)	6 + 5	* 4.040117	56.49	PK-U	33.5	-46.37	0	43.62	-	-	74	-30.38	310	296	V
			* 4.038808	44.93	ADR	33.5	-46.3	0	32.13	54	-21.87	-	-	310	296	V
			* 11.795885	55.15	PK-U	38.9	-43.05	0	51	-	-	74	-23	147	323	H
			* 11.797897	43.44	ADR	38.9	-43.2	0	39.14	54	-14.86	-	-	147	323	H
			* 11.799053	55.14	PK-U	38.9	-43.22	0	50.82	-	-	74	-23.18	116	277	V
			* 11.801886	43.22	ADR	38.8	-43.21	0	38.81	54	-15.19	-	-	116	277	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-2c (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cb/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5510	6 + 5	* 4.052929	55.99	PK-U	33.4	-46.01	0	43.38	-	-	74	-30.62	125	314	H
			* 4.056774	44.18	ADR	33.4	-46.03	0	31.55	54	-22.45	-	-	125	314	H
			* 4.060632	56.02	PK-U	33.4	-46.12	0	43.3	-	-	74	-30.7	349	346	V
			* 4.058634	44.27	ADR	33.4	-46.08	0	31.59	54	-22.41	-	-	349	346	V
			1.832342	60.1	PK-U	30.6	-49.34	0	41.36	-	-	68.2	-26.84	224	301	V
			1.842803	60.95	PK-U	30.7	-49.39	0	42.26	-	-	68.2	-25.94	235	287	H
			10.067015	56.15	PK-U	37.3	-45.45	0	48	-	-	68.2	-20.2	271	393	V
	5550	6 + 5	10.083643	55.76	PK-U	37.3	-45.67	0	47.39	-	-	68.2	-20.81	190	245	H
			* 2.780296	58	PK-U	32.3	-47.4	0	42.9	-	-	74	-31.1	188	231	H
			* 2.780642	46.21	ADR	32.3	-47.4	0	31.11	54	-22.89	-	-	188	231	H
			* 2.774962	57.7	PK-U	32.3	-47.5	0	42.5	-	-	74	-31.5	17	133	V
			* 2.77524	46.08	ADR	32.3	-47.48	0	30.9	54	-23.1	-	-	17	133	V
			* 11.103982	56.63	PK-U	38	-43.6	0	51.03	-	-	74	-22.97	347	380	H
			* 11.106108	44.69	ADR	38	-43.61	0	39.08	54	-14.92	-	-	347	380	H
			* 11.097269	56.13	PK-U	38	-43.6	0	50.53	-	-	74	-23.47	220	244	V
			* 11.096055	44.71	ADR	38	-43.6	0	39.11	54	-14.89	-	-	220	244	V
			16.658959	57.33	PK-U	41.4	-42.4	0	56.33	-	-	68.2	-11.87	118	168	V
			16.659236	56.67	PK-U	41.4	-42.4	0	55.67	-	-	68.2	-12.53	147	316	H
	5670	6 + 5	* 2.832825	57.34	PK-U	32.2	-47.3	0	42.24	-	-	74	-31.76	117	157	H
			* 2.836173	45.83	ADR	32.2	-47.3	0	30.73	54	-23.27	-	-	117	157	H
			* 2.836494	57.58	PK-U	32.2	-47.3	0	42.48	-	-	74	-31.52	106	313	V
			* 2.835576	46.15	ADR	32.2	-47.3	0	31.05	54	-22.95	-	-	106	313	V
			* 11.343623	55.28	PK-U	38.2	-43.3	0	50.18	-	-	74	-23.82	228	388	H
			* 11.340884	44.34	ADR	38.2	-43.3	0	39.24	54	-14.76	-	-	228	388	H
			* 11.342968	55.46	PK-U	38.2	-43.3	0	50.36	-	-	74	-23.64	177	243	V
			* 11.339886	44.03	ADR	38.2	-43.3	0	38.93	54	-15.07	-	-	177	243	V
			17.172534	58.72	PK-U	41.3	-42.7	0	57.32	-	-	68.2	-10.88	356	399	V
			17.181367	58.01	PK-U	41.3	-42.64	0	56.67	-	-	68.2	-11.53	25	303	H
	5710 (Straddle)	6 + 5	* 2.859976	57.82	PK-U	32.2	-47.3	0	42.72	-	-	74	-31.28	230	268	H
			* 2.859618	46.23	ADR	32.2	-47.3	0	31.13	54	-22.87	-	-	230	268	H
			* 2.853493	58.34	PK-U	32.2	-47.3	0	43.24	-	-	74	-30.76	10	127	V
			* 2.85536	46.4	ADR	32.2	-47.3	0	31.3	54	-22.7	-	-	10	127	V
			* 11.418013	55.61	PK-U	38.2	-43.6	0	50.21	-	-	74	-23.79	218	158	H
			* 11.41773	44.02	ADR	38.2	-43.6	0	38.62	54	-15.38	-	-	218	158	H
			* 11.409264	56.31	PK-U	38.2	-43.5	0	51.01	-	-	74	-22.99	198	178	V
			* 11.410347	44.07	ADR	38.2	-43.53	0	38.74	54	-15.26	-	-	198	178	V
			2.411747	60.25	PK-U	32.2	-48.4	0	44.05	-	-	68.2	-24.15	69	150	V
			2.418288	59.68	PK-U	32.2	-48.4	0	43.48	-	-	68.2	-24.72	63	305	H
			2.446682	58.9	PK-U	32.3	-48.3	0	42.9	-	-	68.2	-25.3	208	167	V
			2.448672	59.51	PK-U	32.3	-48.27	0	43.54	-	-	68.2	-24.66	107	143	H
			17.026689	56.74	PK-U	41.4	-42.8	0	55.34	-	-	68.2	-12.86	146	275	V
			17.037686	56.95	PK-U	41.4	-42.73	0	55.62	-	-	68.2	-12.58	296	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

UNII-2c (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (RU 106 / Highest PSD)	5510 (Low Index)	6 + 5	* 4.370319	56.37	PK-U	34.1	-45.8	0	44.67	-	-	74	-29.33	264	215	H
			* 4.369338	44.73	ADR	34.1	-45.83	0	33	54	-21	-	-	264	215	H
			* 4.366379	56.47	PK-U	34.1	-45.96	0	44.61	-	-	74	-29.39	306	164	V
			* 4.366225	44.91	ADR	34.1	-45.97	0	33.04	54	-20.96	-	-	306	164	V
			* 11.03654	56.85	PK-U	37.7	-44.95	0	49.6	-	-	74	-24.4	87	281	H
			* 11.036217	44.96	ADR	37.7	-44.94	0	37.72	54	-16.28	-	-	87	281	H
			* 11.0073	56.15	PK-U	37.7	-44.79	0	49.06	-	-	74	-24.94	196	220	V
			* 11.006251	44.77	ADR	37.7	-44.78	0	37.69	54	-16.31	-	-	196	220	V
	5550 (Low Index)	6 + 5	16.531539	54.54	PK-U	41	-42.48	0	53.06	-	-	68.2	-15.14	352	141	H
			16.529142	54.8	PK-U	41	-42.47	0	53.33	-	-	68.2	-14.87	198	271	V
			* 1.13569	59.93	PK-U	27.9	-47.95	0	39.88	-	-	74	-34.12	143	249	H
			* 1.138609	48.45	ADR	27.9	-47.93	0	28.42	54	-25.58	-	-	143	249	H
			* 1.138939	59.65	PK-U	27.9	-47.91	0	39.64	-	-	74	-34.36	236	194	V
			* 1.136627	48.1	ADR	27.9	-47.95	0	28.05	54	-25.95	-	-	236	194	V
			* 9.11657	55.07	PK-U	36.2	-43.73	0	47.54	-	-	74	-26.46	308	285	H
			* 9.116508	43.47	ADR	36.2	-43.73	0	35.94	54	-18.06	-	-	308	285	H
			* 9.121846	54.73	PK-U	36.2	-43.9	0	47.03	-	-	74	-26.97	272	163	V
			* 9.120042	43.29	ADR	36.2	-43.88	0	35.61	54	-18.39	-	-	272	163	V
			* 11.208009	55.29	PK-U	37.9	-44.34	0	48.85	-	-	74	-25.15	351	217	H
			* 11.207818	43.7	ADR	37.9	-44.33	0	37.27	54	-16.73	-	-	351	217	H
	5670 (Mid Index)	6 + 5	* 11.205908	54.83	PK-U	37.9	-44.34	0	48.39	-	-	74	-25.61	256	163	V
			* 11.203655	43.62	ADR	37.9	-44.34	0	37.18	54	-16.82	-	-	256	163	V
			* 1.231695	59.72	PK-U	28.9	-47.89	0	40.73	-	-	74	-33.27	26	150	H
			* 1.232859	48.01	ADR	28.9	-47.91	0	29	54	-25	-	-	26	150	H
			* 1.230833	60.11	PK-U	28.9	-47.87	0	41.14	-	-	74	-32.86	132	221	V
			* 1.231467	48.31	ADR	28.9	-47.88	0	29.33	54	-24.67	-	-	132	221	V
			3.259339	57.09	PK-U	32.9	-46.18	0	43.81	-	-	68.2	-24.39	130	277	H
			3.454529	57.41	PK-U	32.6	-46.57	0	43.44	-	-	68.2	-24.76	96	310	V
			* 11.337761	55.47	PK-U	38	-44.33	0	49.14	-	-	74	-24.86	300	370	H
			* 11.339945	44.23	ADR	38	-44.23	0	38	54	-16	-	-	300	370	H
			* 11.330477	56.26	PK-U	37.9	-44.33	0	49.83	-	-	74	-24.17	353	159	V
			* 11.328967	44.75	ADR	37.9	-44.46	0	38.19	54	-15.81	-	-	353	159	V
	5710 (Straddle) (Mid Index)	6 + 5	* 1.560039	59.29	PK-U	27.6	-47.91	0	38.98	-	-	74	-35.02	282	182	H
			* 1.559719	47.41	ADR	27.6	-47.9	0	27.11	54	-26.89	-	-	282	182	H
			* 1.556461	59.28	PK-U	27.6	-47.91	0	38.97	-	-	74	-35.03	216	259	V
			* 1.555506	47.37	ADR	27.6	-47.91	0	27.06	54	-26.94	-	-	216	259	V
			* 2.789585	58.27	PK-U	32.3	-47.41	0	43.16	-	-	74	-30.84	313	201	H
			* 2.790487	46.62	ADR	32.3	-47.4	0	31.52	54	-22.48	-	-	313	201	H
			* 2.788423	58.54	PK-U	32.4	-47.43	0	43.51	-	-	74	-30.49	254	296	V
			* 2.786741	46.81	ADR	32.4	-47.42	0	31.79	54	-22.21	-	-	254	296	V
			* 11.427979	55.38	PK-U	38.2	-44.02	0	49.56	-	-	74	-24.44	340	102	H
			* 11.426587	44.14	ADR	38.2	-43.91	0	38.43	54	-15.57	-	-	340	102	H
			* 11.421608	55.26	PK-U	38.1	-44.07	0	49.29	-	-	74	-24.71	164	276	V
			* 11.423192	44.14	ADR	38.2	-44.01	0	38.33	54	-15.67	-	-	164	276	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-2c (MIMOCDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbl/ Ftr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5530	6 + 5	* 1.235798	62.04	PK-U	28.5	0	-49.72	40.82	-	-	74	-33.18	2	101	H
			* 1.235724	50.25	ADR	28.5	0	-49.73	29.02	54	-24.98	-	-	2	101	H
			* 3.984544	57.44	PK-U	33.5	0	-47.3	43.64	-	-	74	-30.36	2	101	H
			* 3.983782	45.54	ADR	33.5	0	-47.3	31.74	54	-22.26	-	-	2	101	H
			* 1.236521	62.27	PK-U	28.5	0	-49.7	41.07	-	-	74	-32.93	2	101	V
			* 1.237541	50.29	ADR	28.5	0	-49.75	29.04	54	-24.96	-	-	2	101	V
			* 4.739417	58.05	PK-U	34.1	0	-48.04	44.11	-	-	74	-29.89	2	101	V
			* 4.740219	46.02	ADR	34.1	0	-48.1	32.02	54	-21.98	-	-	2	101	V
			16.621923	53.76	PK-U	41.6	0	-42.2	53.16	-	-	68.2	-15.04	2	101	V
			17.456506	53.46	PK-U	41.8	0	-40.95	54.31	-	-	68.2	-13.89	2	199	H
			* 1.240667	61.89	PK-U	28.5	0	-49.83	40.56	-	-	74	-33.44	2	200	H
			* 1.239744	50.19	ADR	28.5	0	-49.87	28.82	54	-25.18	-	-	2	200	H
	5610	6 + 5	* 3.564129	57.18	PK-U	33	0	-47.11	43.07	-	-	74	-30.93	2	200	H
			* 3.566418	45.33	ADR	33	0	-47.14	31.19	54	-22.81	-	-	2	200	H
			* 1.235732	62.04	PK-U	28.5	0	-49.73	40.81	-	-	74	-33.19	2	200	V
			* 1.236545	50.33	ADR	28.5	0	-49.7	29.13	54	-24.87	-	-	2	200	V
			* 4.520287	58.81	PK-U	34	0	-47.97	44.84	-	-	74	-29.16	2	101	V
			* 4.522135	46.34	ADR	34	0	-47.91	32.43	54	-21.57	-	-	2	101	V
			* 11.814873	54.44	PK-U	38.6	0	-43.9	49.14	-	-	74	-24.86	2	101	H
			* 11.815218	42.42	ADR	38.6	0	-43.92	37.1	54	-16.9	-	-	2	101	H
			15.105055	54.37	PK-U	39.8	0	-41.79	52.38	-	-	68.2	-15.82	2	200	V
			* 1.287475	61.69	PK-U	28.5	0	-49.5	40.69	-	-	74	-33.31	0	200	H
			* 1.289718	50.27	ADR	28.5	0	-49.5	29.27	54	-24.73	-	-	0	200	H
			* 3.665379	57.83	PK-U	33.2	0	-47.4	43.63	-	-	74	-30.37	0	200	H
11be (Partial RU 484 / Highest PSD)	5530 (Low Index)	6 + 5	* 3.663154	46.02	ADR	33.2	0	-47.4	31.82	54	-22.18	-	-	0	200	H
			* 1.232005	62.38	PK-U	28.5	0	-49.8	41.08	-	-	74	-32.92	0	101	V
			* 1.23334	50.19	ADR	28.5	0	-49.8	28.89	54	-25.11	-	-	0	101	V
			2.965973	58.95	PK-U	32.7	0	-47.9	43.75	-	-	68.2	-24.45	0	101	V
			12.758921	53.05	PK-U	39.2	0	-43.29	48.96	-	-	68.2	-19.24	0	101	V
			13.663826	54.38	PK-U	39	0	-43.8	49.58	-	-	68.2	-18.62	0	200	H
	5610 (Low Index)	6 + 5	* 4.212657	56.95	PK-U	33.7	0	-46.38	44.27	-	-	74	-29.73	339	208	H
			* 4.210996	45.57	ADR	33.7	0	-46.36	32.91	54	-21.09	-	-	339	208	H
			* 4.207241	57.34	PK-U	33.6	0	-46.35	44.59	-	-	74	-29.41	151	272	V
			* 4.210259	45.31	ADR	33.7	0	-46.37	32.64	54	-21.36	-	-	151	272	V
			* 11.071501	56.6	PK-U	37.8	0	-44.58	49.82	-	-	74	-24.18	242	343	H
			* 11.07352	45.05	ADR	37.8	0	-44.54	38.31	54	-15.69	-	-	242	343	H
			* 11.075522	56.79	PK-U	37.8	0	-44.45	50.14	-	-	74	-23.86	277	371	V
			* 11.076394	45.17	ADR	37.8	0	-44.4	38.57	54	-15.43	-	-	277	371	V
			16.508739	55.12	PK-U	41	0	-42.76	53.36	-	-	68.2	-14.84	137	212	H
			16.51177	54.67	PK-U	41	0	-42.65	53.02	-	-	68.2	-15.18	109	222	V
			* 1.133508	59.75	PK-U	27.9	0	-47.97	39.68	-	-	74	-34.32	95	352	H
			* 1.132686	48.33	ADR	27.9	0	-47.95	28.28	54	-25.72	-	-	95	352	H
	5610 (High Index)	6 + 5	* 1.133626	59.62	PK-U	27.9	0	-47.97	39.55	-	-	74	-34.45	184	284	V
			* 1.13364	48.03	ADR	27.9	0	-47.97	27.96	54	-26.04	-	-	184	284	V
			* 3.707435	57.23	PK-U	33.1	0	-46.31	44.02	-	-	74	-29.98	272	319	H
			* 3.705786	45.18	ADR	33.1	0	-46.32	31.96	54	-22.04	-	-	272	319	H
			* 3.711201	56.6	PK-U	33.2	0	-46.22	43.58	-	-	74	-30.42	293	361	V
			* 3.708503	44.82	ADR	33.2	0	-46.28	31.74	54	-22.26	-	-	293	361	V
			* 11.262118	54.89	PK-U	37.9	0	-44.32	48.47	-	-	74	-25.53	168	250	H
			* 11.260869	43.6	ADR	37.9	0	-44.14	37.36	54	-16.64	-	-	168	250	H
			* 11.248404	54.39	PK-U	37.9	0	-43.98	48.31	-	-	74	-25.69	277	116	V
			* 11.246904	43.22	ADR	37.9	0	-43.91	37.21	54	-16.79	-	-	277	116	V
	5690 (Straddle) (High Index)	6 + 5	* 2.247954	58.98	PK-U	31.9	0	-48.25	42.63	-	-	74	-31.37	90	136	H
			* 2.249418	47.19	ADR	31.9	0	-48.24	30.85	54	-23.15	-	-	90	136	H
			* 2.242947	59.16	PK-U	31.9	0	-48.26	42.8	-	-	74	-31.2	265	322	V
			* 2.241079	47.48	ADR	31.9	0	-48.3	31.08	54	-22.92	-	-	265	322	V
			* 3.645678	56.7	PK-U	33.2	0	-46.18	43.72	-	-	74	-30.28	189	214	H
			* 3.644936	45.21	ADR	33.2	0	-46.23	32.18	54	-21.82	-	-	189	214	H
			* 3.641198	56.6	PK-U	33.2	0	-46.21	43.59	-	-	74	-30.41	320	226	V
			* 3.642472	45.38	ADR	33.2	0	-46.18	32.4	54	-21.6	-	-	320	226	V
			* 11.38637	55.87	PK-U	38.1	0	-44.07	49.9	-	-	74	-24.1	115	349	H
			* 11.384944	44.21	ADR	38.1	0	-44.13	38.18	54	-15.82	-	-	115	349	H
			* 11.386	55.65	PK-U	38.1	0	-44.05	49.7	-	-	74	-24.3	249	263	V
			* 11.384577	44.08	ADR	38.1	0	-44.13	38.05	54	-15.95	-	-	249	263	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

UNII-2c (MIMOCDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (Partial RU 106 / Highest PSD)	5530 (High Index)	6 + 5	* 2.814717	57.21	PK-U	32.3	0	-46.95	42.56	-	-	74	-31.44	55	100	H
			* 2.81684	45.9	ADR	32.3	0	-46.94	31.26	54	-22.74	-	-	55	100	H
			* 2.817833	58.06	PK-U	32.3	0	-46.97	43.39	-	-	74	-30.61	181	134	V
			* 2.817303	45.76	ADR	32.3	0	-46.95	31.11	54	-22.89	-	-	181	134	V
			* 11.087944	56.38	PK-U	37.8	0	-44.34	49.84	-	-	74	-24.16	253	120	H
			* 11.087772	44.37	ADR	37.8	0	-44.36	37.81	54	-16.19	-	-	253	120	H
			* 11.089201	56.23	PK-U	37.8	0	-44.37	49.66	-	-	74	-24.34	266	120	V
			* 11.087632	44.13	ADR	37.8	0	-44.37	37.56	54	-16.44	-	-	266	120	V
			* 15.975295	55.66	PK-U	40.9	0	-42.58	53.98	-	-	74	-20.02	300	161	H
			* 15.976125	43.17	ADR	41	0	-42.59	41.58	54	-12.42	-	-	300	161	H
			* 15.993237	54.55	PK-U	41	0	-42.62	52.93	-	-	74	-21.07	303	187	V
			* 15.992551	43.28	ADR	41	0	-42.61	41.67	54	-12.33	-	-	303	187	V
			* 1.559712	59.34	PK-U	27.6	0	-47.9	39.04	-	-	74	-34.96	67	264	H
			* 1.560735	47.25	ADR	27.6	0	-47.91	26.94	54	-27.06	-	-	67	264	H
			* 1.554734	59.31	PK-U	27.6	0	-47.89	39.02	-	-	74	-34.98	158	210	V
	5610 (High Index)	6 + 5	* 1.555573	47.41	ADR	27.6	0	-47.91	27.1	54	-26.9	-	-	158	210	V
			* 8.476716	54.28	PK-U	35.9	0	-43.67	46.51	-	-	74	-27.49	274	150	H
			* 8.476061	42.39	ADR	35.9	0	-43.68	34.61	54	-19.39	-	-	274	150	H
			* 8.462541	54.3	PK-U	35.9	0	-43.23	46.97	-	-	74	-27.03	307	379	V
			* 8.464088	42.46	ADR	35.9	0	-43.23	35.13	54	-18.87	-	-	307	379	V
			* 11.234369	55.63	PK-U	37.9	0	-43.93	49.6	-	-	74	-24.4	356	214	H
			* 11.233171	43.59	ADR	37.9	0	-43.96	37.53	54	-16.47	-	-	356	214	H
			* 11.246644	55.02	PK-U	37.9	0	-43.87	49.05	-	-	74	-24.95	258	334	V
			* 11.247272	43.63	ADR	37.9	0	-43.95	37.58	54	-16.42	-	-	258	334	V
			* 1.32562	59.71	PK-U	29.2	0	-47.61	41.3	-	-	74	-32.7	185	107	H
			* 1.325956	47.75	ADR	29.2	0	-47.59	29.36	54	-24.64	-	-	185	107	H
			* 1.324257	59.34	PK-U	29.2	0	-47.65	40.89	-	-	74	-33.11	318	255	V
			* 1.322635	47.87	ADR	29.2	0	-47.65	29.42	54	-24.58	-	-	318	255	V
			* 4.393152	56.23	PK-U	34.2	0	-45.92	44.51	-	-	74	-29.49	265	333	H
	5690 (Straddle) (High Index)	6 + 5	* 4.392883	44.53	ADR	34.2	0	-45.92	32.81	54	-21.19	-	-	265	333	H
			* 4.39698	56.31	PK-U	34.2	0	-46.02	44.49	-	-	74	-29.51	132	304	V
			* 4.396484	44.7	ADR	34.2	0	-45.99	32.91	54	-21.09	-	-	132	304	V
			* 11.384414	55.7	PK-U	38.1	0	-44.13	49.67	-	-	74	-24.33	202	302	H
			* 11.382329	44.37	ADR	38	0	-44.13	38.24	54	-15.76	-	-	202	302	H
			* 11.388664	55.65	PK-U	38.1	0	-44.13	49.62	-	-	74	-24.38	249	266	V
			* 11.387342	44.2	ADR	38.1	0	-44.13	38.17	54	-15.83	-	-	249	266	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

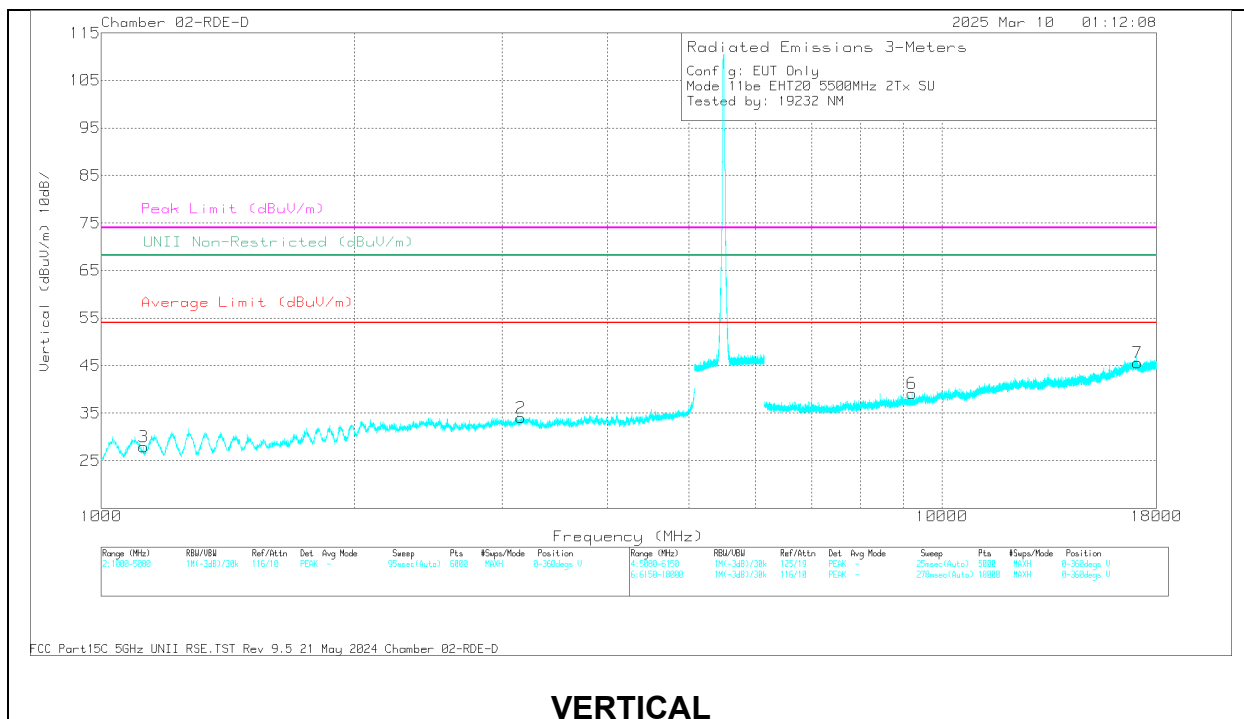
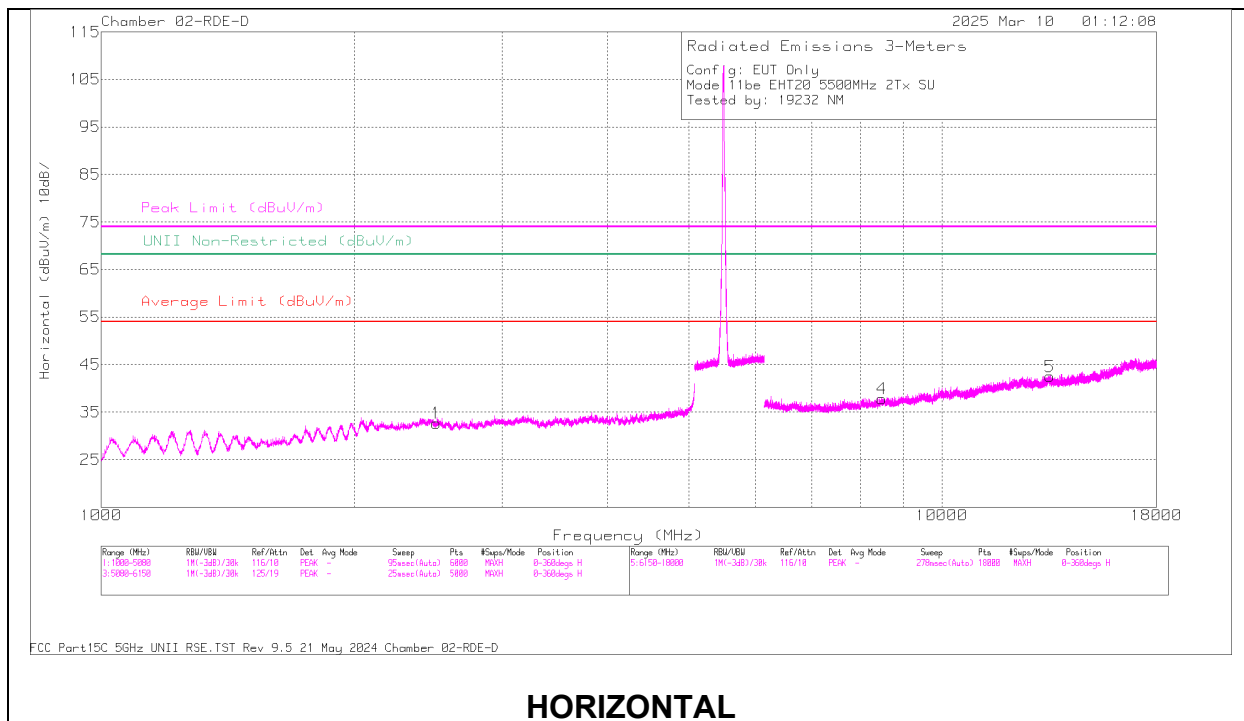
160MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be SU Mode / Highest Power)	5570	6 + 5	* 3.64066	57.16	PK-U	33.1	0	-47.3	42.96	-	-	74	-31.04	262	199	H
			* 3.642181	45.53	ADR	33.1	0	-47.4	31.23	54	-22.77	-	-	262	199	H
			* 3.64057	57.51	PK-U	33.1	0	-47.3	43.31	-	-	74	-30.69	53	251	V
			* 3.640334	45.54	ADR	33.1	0	-47.3	31.34	54	-22.66	-	-	53	251	V
			* 11.139924	54.45	PK-U	37.9	0	-44.21	48.14	-	-	74	-25.86	196	319	H
			* 11.140158	43.06	ADR	37.9	0	-44.2	36.76	54	-17.24	-	-	196	319	H
			* 11.141668	55.43	PK-U	37.9	0	-44.2	49.13	-	-	74	-24.87	227	211	V
			* 11.139613	42.95	ADR	37.9	0	-44.24	36.61	54	-17.39	-	-	227	211	V
			16.706104	55.48	PK-U	41.8	0	-42.81	54.47	-	-	68.2	-13.73	9	211	V
			16.71137	55.68	PK-U	41.8	0	-42.8	54.68	-	-	68.2	-13.52	198	196	H
			1.808749	58.26	PK-U	30.2	0	-46.47	41.99	-	-	68.2	-26.21	211	341	H
11be Partial RU 242 / Highest PSD)	5570 (High Index)	6 + 5	1.807653	46.7	ADR	30.2	0	-46.43	30.47	-	-	-	-	211	341	H
			3.644566	55.63	PK-U	33.1	0	-45.4	43.33	-	-	74	-30.67	55	246	H
			3.644162	44.02	ADR	33.1	0	-45.4	31.72	54	-22.28	-	-	55	246	H
			1.810679	58.25	PK-U	30.2	0	-46.43	42.02	-	-	68.2	-26.18	151	284	V
			1.809033	46.64	ADR	30.2	0	-46.5	30.34	-	-	-	-	151	284	V
			3.64609	55.54	PK-U	33.1	0	-45.4	43.24	-	-	74	-30.76	343	224	V
			3.643706	44.01	ADR	33.1	0	-45.37	31.74	54	-22.26	-	-	343	224	V
			12.648271	53.48	PK-U	38.8	0	-41.1	51.18	-	-	74	-22.82	343	199	H
			12.646237	41.73	ADR	38.8	0	-41.1	39.43	54	-14.57	-	-	343	199	H
			12.64186	53.12	PK-U	38.8	0	-41.11	50.81	-	-	74	-23.19	343	101	V
			12.643335	41.8	ADR	38.8	0	-41.13	39.47	54	-14.53	-	-	343	101	V
11be Partial RU 52 / Highest PSD)	5570 (High Index)	6 + 5	2.021129	57.35	PK-U	31.7	0	-46.5	42.55	-	-	68.2	-25.65	265	115	H
			1.802442	46.07	ADR	30.1	0	-46.5	29.67	-	-	-	-	265	115	H
			3.495289	55.85	PK-U	32.9	0	-45.1	43.65	-	-	68.2	-24.55	93	282	H
			3.468369	43.83	ADR	32.9	0	-45.1	31.63	-	-	-	-	93	282	H
			* 1.698329	56.68	PK-U	29.1	0	-46.5	39.28	-	-	74	-34.72	95	289	V
			* 1.697296	45.24	ADR	29.1	0	-46.5	27.84	54	-26.16	-	-	95	289	V
			3.46835	55.32	PK-U	32.9	0	-45.1	43.12	-	-	68.2	-25.08	33	101	V
			3.470323	43.47	ADR	32.9	0	-45.1	31.27	-	-	-	-	33	101	V
			* 12.452463	52.55	PK-U	38.6	0	-40.75	50.4	-	-	74	-23.6	33	101	H
			* 12.482246	40.95	ADR	38.6	0	-41.22	38.33	54	-15.67	-	-	33	101	H
			* 12.480369	52.5	PK-U	38.6	0	-41.3	49.8	-	-	74	-24.2	33	200	V
			* 12.471582	40.94	ADR	38.6	0	-41.42	38.12	54	-15.88	-	-	33	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5500MHz)

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	200896 ACF(dB/m)	Amp/Cbl/Filtr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 1.10313	60.61	PK-U	27.6	-49.1	0	39.11	-	-	74	-34.89	1	200	V
3	* 1.10385	48.87	ADR	27.6	-49.1	0	27.37	54	-26.63	-	-	1	200	V
4	* 8.493472	53.38	PK-U	36	-42.1	0	47.28	-	-	74	-26.72	1	200	H
4	* 8.487463	41.95	ADR	36	-42.2	0	35.75	54	-18.25	-	-	1	200	H
1	2.51388	58.03	PK-U	32.4	-47.7	0	42.73	-	-	68.2	-25.47	1	101	H
2	3.165595	56.5	PK-U	33	-45.5	0	44	-	-	68.2	-24.2	1	200	V
6	9.210694	53.47	PK-U	36.4	-41.8	0	48.07	-	-	68.2	-20.13	1	101	V
5	13.425496	52.48	PK-U	38.8	-39.3	0	51.98	-	-	68.2	-16.22	1	101	H
7	17.108362	51.4	PK-U	41.4	-37.7	0	55.1	-	-	68.2	-13.1	1	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

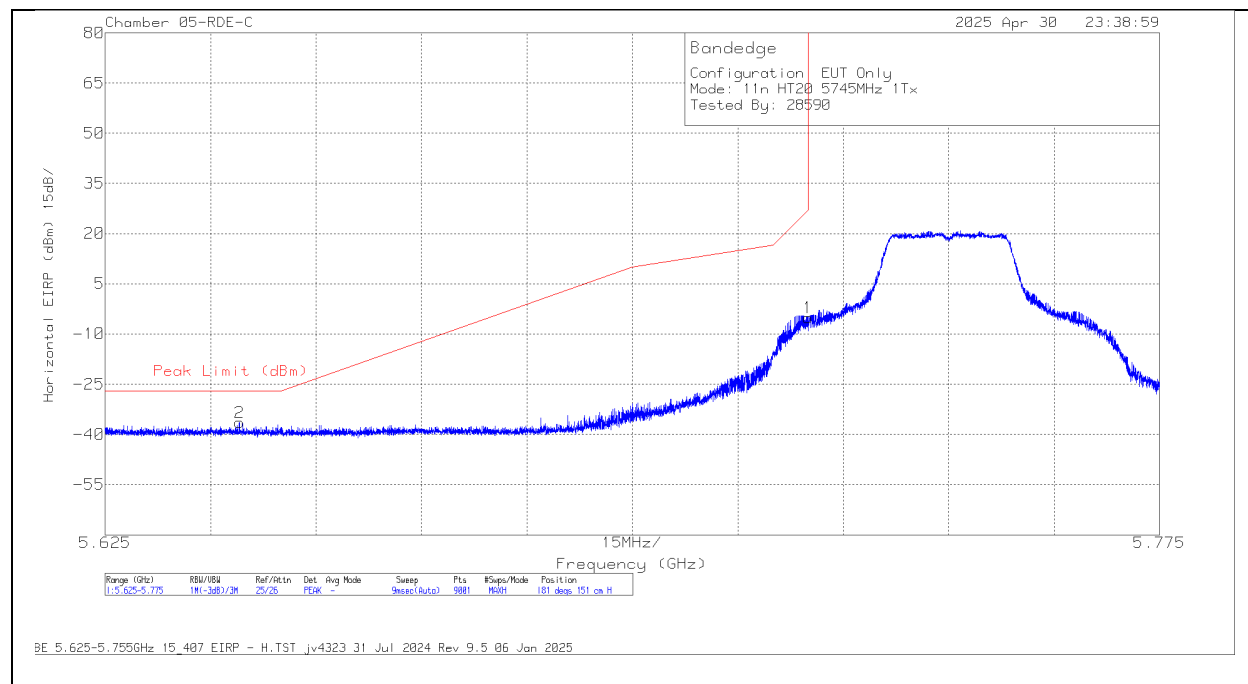
PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

10.1.25. 802.11n/ac SISO MODE IN UNII-3 BAND BANDEDGES

UNII-3 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Conversion Factor (dB)	Amp/Cb/FI tr/Pad (dB)	DCCF (dB)	Correct Reading EIRP (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
HT20	5745	6	5.6441	-44.7	Pk	34.6	11.8	-38.18	0	-36.48	-27	-9.48	181	151	H	
			5.725	-13.51	Pk	34.7	11.8	-38.2	0	-5.21	27	-32.21	181	151	H	
			5.638067	-46.42	Pk	34.6	11.8	-38.33	0	-38.35	-27	-11.35	179	151	V	
			5.725	-22.16	Pk	34.7	11.8	-38.2	0	-13.86	27	-40.86	179	151	V	
			5.85	-24.69	Pk	35	11.8	-37.82	0	-15.71	27	-42.71	203	180	H	
			5.9416	-46.42	Pk	35.2	11.8	-37.47	0	-36.89	-27	-9.89	203	180	H	
	5825	6	5.85	-33.26	Pk	35	11.8	-37.82	0	-24.28	27	-51.28	192	251	V	
			5.94455	-47.36	Pk	35.2	11.8	-37.49	0	-37.85	-27	-10.85	192	251	V	
			5.649384	-43.12	Pk	34.6	11.8	-38.37	0	-35.09	-27	-8.09	208	239	H	
			5.725	-22.03	Pk	34.7	11.8	-38.2	0	-13.73	27	-40.73	208	239	H	
			5.633584	-44.26	Pk	34.6	11.8	-38.4	0	-36.26	-27	-9.26	214	218	V	
			5.725	-19.07	Pk	34.7	11.8	-38.2	0	-10.77	27	-37.77	214	218	V	
	5745	5	5.85	-28.95	Pk	35	11.8	-37.82	0	-19.97	27	-46.97	208	221	H	
			5.987675	-46.92	Pk	35.2	11.8	-37.45	0	-37.37	-27	-10.37	208	221	H	
			5.85	-32.18	Pk	35	11.8	-37.82	0	-23.2	27	-50.2	219	253	V	
			5.9403	-46.18	Pk	35.2	11.8	-37.48	0	-36.66	-27	-9.66	219	253	V	
5825			5	5.650551	-42.08	Pk	34.6	11.8	-38.34	0	-34.02	-26.59	-7.43	280	183	H
				5.725	-14.1	Pk	34.7	11.8	-38.2	0	-5.8	27	-32.8	280	183	H
	5.646584	-46.09		Pk	34.6	11.8	-38.27	0	-37.96	-27	-10.96	262	378	V		
	5.725	-23.32		Pk	34.7	11.8	-38.2	0	-15.02	27	-42.02	262	378	V		
	5.85	-30.58		Pk	35	11.8	-37.82	0	-21.6	27	-48.6	212	182	H		
	5.936825	-46.32		Pk	35.1	11.8	-37.49	0	-36.91	-27	-9.91	212	182	H		
HT40	5795	6	5.85	-40.62	Pk	35	11.8	-37.82	0	-31.64	27	-58.64	196	245	V	
			5.963525	-46.7	Pk	35.2	11.8	-37.52	0	-37.22	-27	-10.22	196	245	V	
			5.64765	-44.16	Pk	35	11.8	-38.39	0	-35.75	-27	-8.75	257	180	H	
			5.725	-21.89	Pk	35.1	11.8	-38.19	0	-13.18	27	-40.18	257	180	H	
			5.650767	-42.1	Pk	35	11.8	-38.4	0	-33.7	-26.43	-7.27	181	187	V	
			5.725	-21.83	Pk	35.1	11.8	-38.19	0	-13.12	27	-40.12	181	187	V	
	5755	5	5.85	-38.47	Pk	35	11.8	-37.82	0	-29.49	27	-56.49	261	210	H	
			5.927	-45.07	Pk	35.1	11.8	-37.54	0	-35.71	-27	-8.71	261	210	H	
			5.85	-40.14	Pk	35	11.8	-37.82	0	-31.16	27	-58.16	214	192	V	
			5.9269	-44.08	Pk	35.1	11.8	-37.55	0	-34.73	-27	-7.73	214	192	V	
			5.649834	-40.33	Pk	34.6	11.8	-38.35	0	-32.28	-27	-5.28	211	173	H	
			5.725	-20.75	Pk	34.7	11.8	-38.2	0	-12.45	27	-39.45	211	173	H	
	VHT80	5775 (Lower)	6	5.626533	-46.49	Pk	34.6	11.8	-38.16	0	-38.25	-27	-11.25	196	278	V
				5.725	-30.6	Pk	34.7	11.8	-38.2	0	-22.3	27	-49.3	196	278	V
				5.85	-23.96	Pk	35	11.8	-37.82	0	-14.98	27	-41.98	215	161	H
				5.924925	-43.05	Pk	35.1	11.8	-37.61	0	-33.76	-26.94	-6.82	215	161	H
5.85				-29.86	Pk	35	11.8	-37.82	0	-20.88	27	-47.88	194	293	V	
5.92955				-45.97	Pk	35.1	11.8	-37.57	0	-36.64	-27	-9.64	194	293	V	
5775 (Upper)		6	5.650301	-39.8	Pk	34.6	11.8	-38.34	0	-31.74	-26.78	-4.96	222	150	H	
			5.725	-24.43	Pk	34.7	11.8	-38.2	0	-16.13	27	-43.13	222	150	H	
			5.6491	-40.69	Pk	34.6	11.8	-38.38	0	-32.67	-27	-5.67	191	172	V	
			5.725	-25.43	Pk	34.7	11.8	-38.2	0	-17.13	27	-44.13	191	172	V	
			5.85	-30.24	Pk	35.1	11.8	-37.78	0	-21.12	27	-48.12	251	149	H	
			5.9272	-44.1	Pk	35.3	11.8	-37.69	0	-34.69	-27	-7.69	251	149	H	
5775 (Lower)		5	5.85	-32.87	Pk	35.1	11.8	-37.78	0	-23.75	27	-50.75	181	195	V	
			5.928325	-45.81	Pk	35.3	11.8	-37.63	0	-36.34	-27	-9.34	181	195	V	

Pk - Peak detector

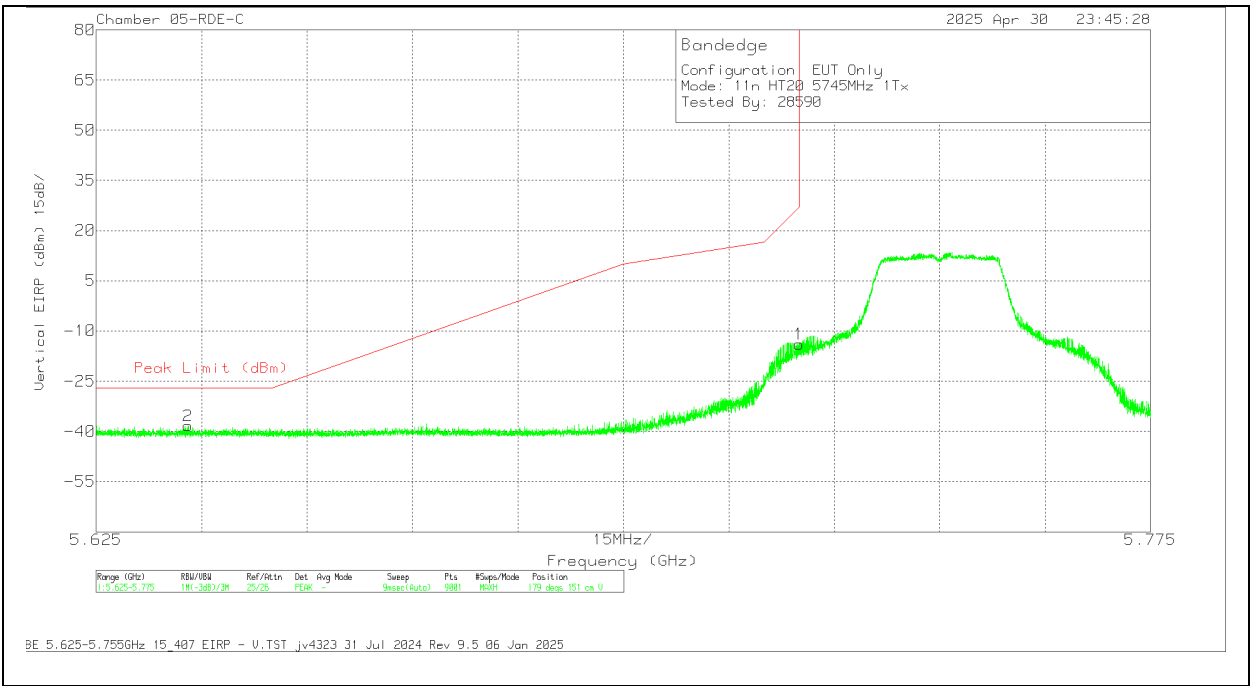
BANDEDGE (LOW CHANNEL / 5745MHz)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230300 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.6441	-44.7	Pk	34.6	11.8	0	-38.18	-36.48	-27	-9.48	181	151	H
1	5.725	-13.51	Pk	34.7	11.8	0	-38.2	-5.21	27	-32.21	181	151	H

Pk - Peak detector

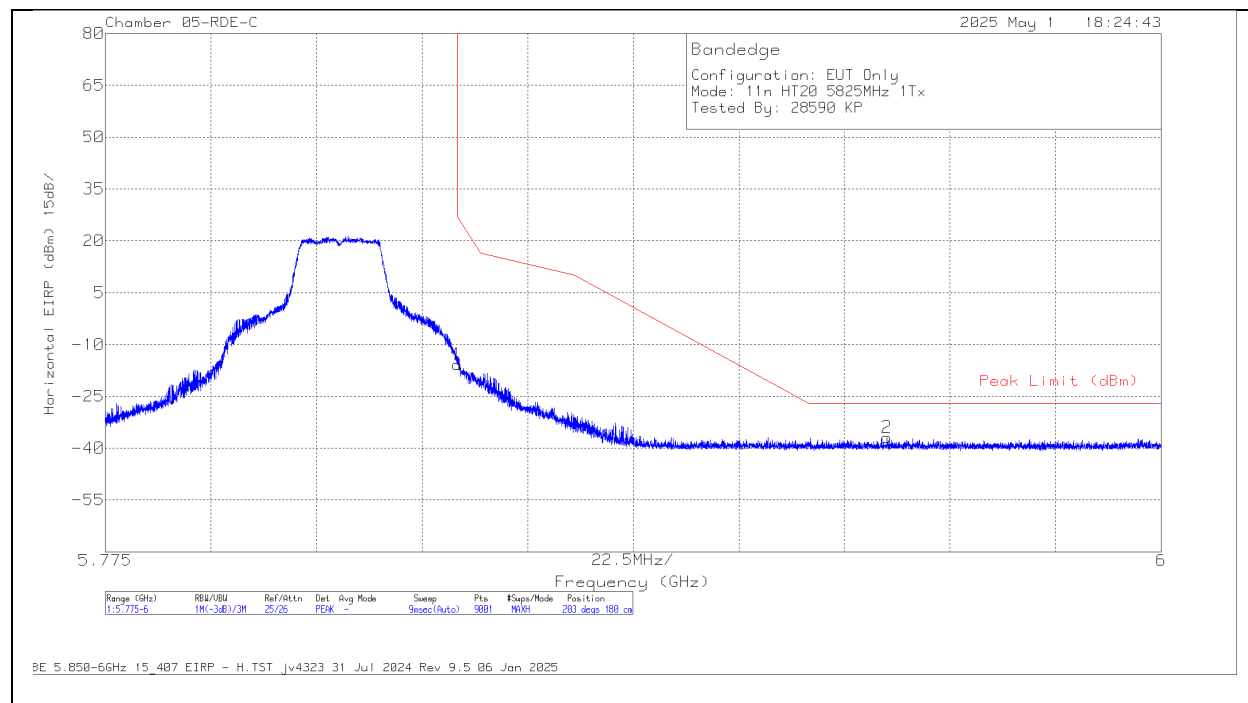
BANDEDGE (LOW CHANNEL / 5745MHz)

VERTICAL RESULT



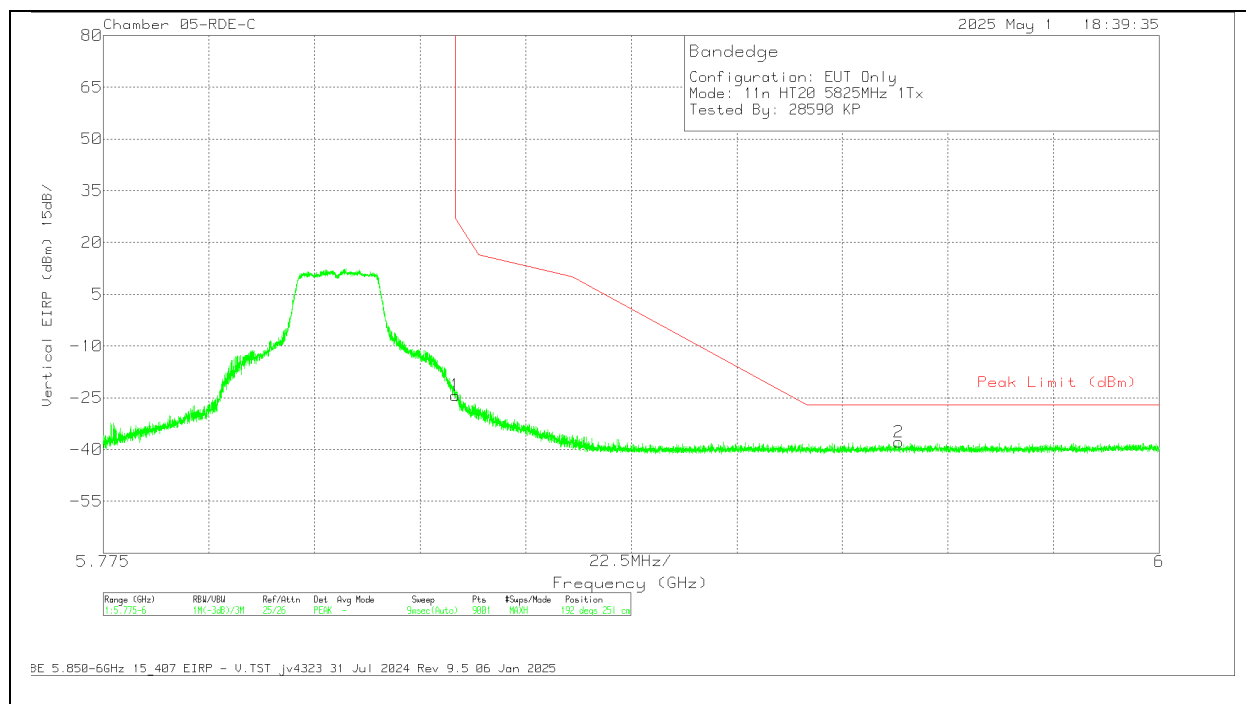
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230300 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.638067	-46.42	Pk	34.6	11.8	0	-38.33	-38.35	-27	-11.35	179	151	V
1	5.725	-22.16	Pk	34.7	11.8	0	-38.2	-13.86	27	-40.86	179	151	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL / 5825MHz)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230300 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-24.69	Pk	35	11.8	0	-37.82	-15.71	27	-42.71	203	180	H
2	5.9416	-46.42	Pk	35.2	11.8	0	-37.47	-36.89	-27	-9.89	203	180	H

Pk - Peak detector

BANDEDGE (HIGH CHANNEL / 5825MHz)**VERTICAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230300 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-33.26	Pk	35	11.8	0	-37.82	-24.28	27	-51.28	192	251	V
2	5.94455	-47.36	Pk	35.2	11.8	0	-37.49	-37.85	-27	-10.85	192	251	V

Pk - Peak detector

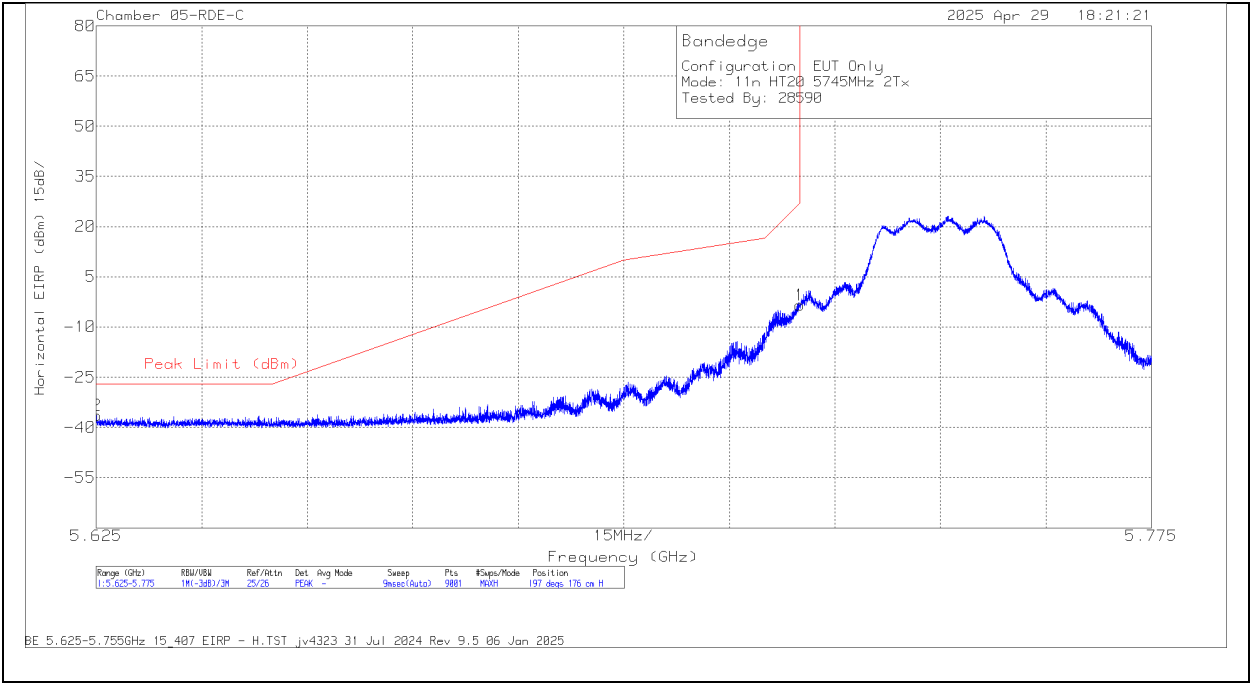
10.1.26. 802.11n/ac MIMO MODE IN UNII-3 BAND – BANDEDGES

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Conversio n Factor (dB)	Amp/Cbl/FI tr/Pad (dB)	DCCF (dB)	Correct Reading EIRP (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5745	6 + 5	5.625067	-44.68	Pk	34.6	11.8	-38.16	0	-36.44	-27	-9.44	197	176	H
			5.725	-11.79	Pk	34.7	11.8	-38.2	0	-3.49	27	-30.49	197	176	H
			5.639984	-46.14	Pk	34.6	11.8	-38.2	0	-37.94	-27	-10.94	183	142	V
	5825		5.725	-21.11	Pk	34.7	11.8	-38.2	0	-12.81	27	-39.81	183	142	V
			5.85	-24.02	Pk	35	11.8	-37.82	0	-15.04	27	-42.04	182	163	H
			5.9438	-46.97	Pk	35.2	11.8	-37.48	0	-37.45	-27	-10.45	182	163	H
			5.85	-33.23	Pk	35	11.8	-37.82	0	-24.25	27	-51.25	210	271	V
HT40	5755	6 + 5	5.9911	-46.36	Pk	35.3	11.8	-37.37	0	-36.63	-27	-9.63	210	271	V
			5.651167	-38.79	Pk	34.6	11.8	-38.33	0	-30.72	-27	-3.72	215	184	H
			5.725	-13.01	Pk	34.7	11.8	-38.2	0	-4.71	27	-31.71	215	184	H
	5795		5.645634	-45.05	Pk	34.6	11.8	-38.26	0	-36.91	-27	-9.91	191	187	V
			5.725	-23.39	Pk	34.7	11.8	-38.2	0	-15.09	27	-42.09	191	187	V
			5.85	-35.51	Pk	35	11.8	-37.82	0	-26.53	27	-53.53	226	173	H
			5.942325	-45.68	Pk	35.2	11.8	-37.5	0	-36.18	-27	-9.18	226	173	H
VHT80	5775 (Lower)	6 + 5	5.85	-40.71	Pk	35	11.8	-37.82	0	-31.73	27	-58.73	209	217	V
			5.945175	-45.13	Pk	35.2	11.8	-37.48	0	-35.61	-27	-8.61	209	217	V
			5.649684	-39.95	Pk	34.6	11.8	-38.36	0	-31.91	-27	-4.91	210	165	H
	5775 (Upper)		5.725	-20.08	Pk	34.7	11.8	-38.2	0	-11.78	27	-38.78	210	165	H
			5.627033	-44.22	Pk	34.6	11.8	-38.15	0	-35.97	-27	-8.97	195	178	V
			5.725	-33.05	Pk	34.7	11.8	-38.2	0	-24.75	27	-51.75	195	178	V
			5.85	-23.23	Pk	35	11.8	-37.82	0	-14.25	27	-41.25	222	260	H
			5.926825	-41.45	Pk	35.1	11.8	-37.55	0	-32.1	-27	-5.1	222	260	H
			5.85	-33.81	Pk	35	11.8	-37.82	0	-24.83	27	-51.83	207	268	V
			5.927475	-44.38	Pk	35.1	11.8	-37.56	0	-35.04	-27	-8.04	207	268	V

Pk - Peak detector

BANDEDGE (LOW CHANNEL / 5745MHz)

HORIZONTAL RESULT

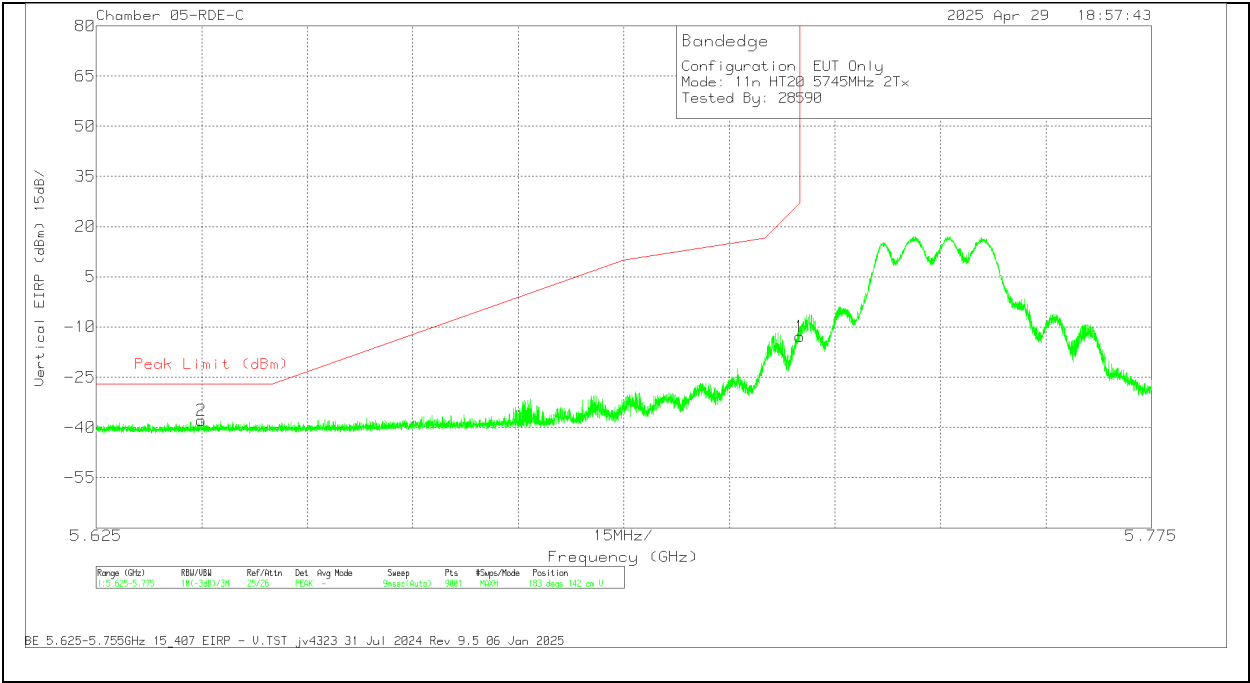


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230300 ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.625067	-44.68	Pk	34.6	11.8	-38.16	0	-36.44	-27	-9.44	197	176	H
1	5.725	-11.79	Pk	34.7	11.8	-38.2	0	-3.49	27	-30.49	197	176	H

Pk - Peak detector

BANDEDGE (LOW CHANNEL / 5745MHz)

VERTICAL RESULT

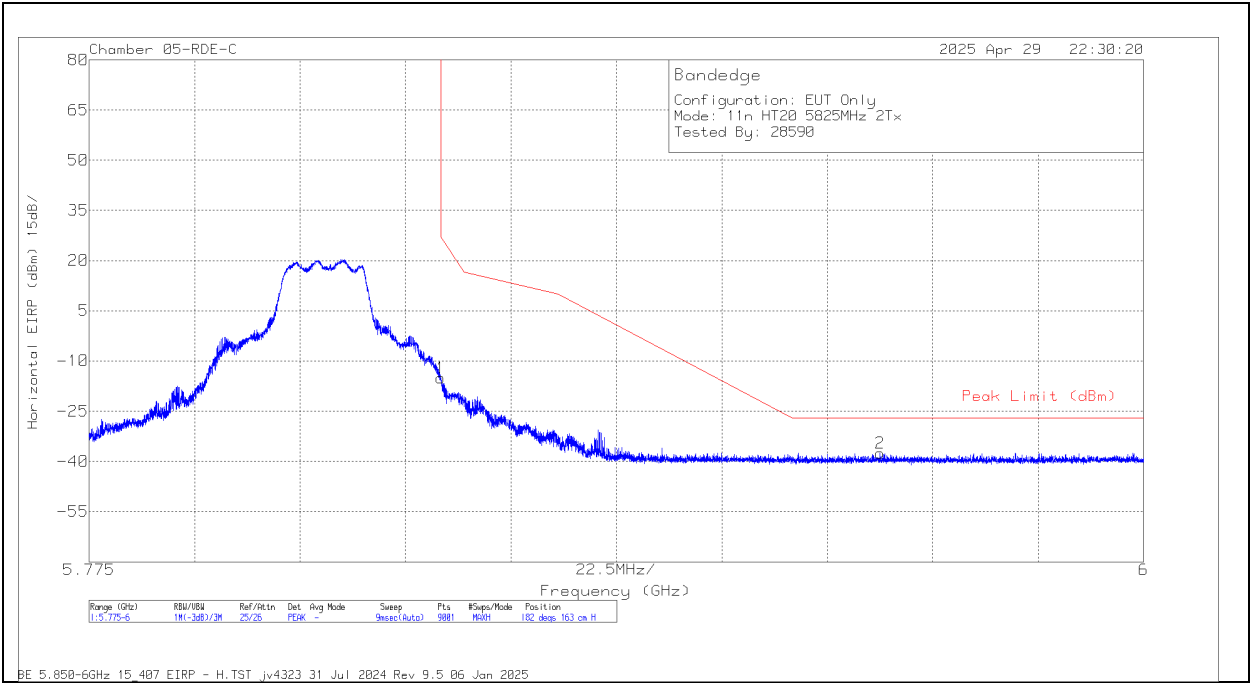


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230300 ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.639984	-46.14	Pk	34.6	11.8	-38.2	0	-37.94	-27	-10.94	183	142	V
1	5.725	-21.11	Pk	34.7	11.8	-38.2	0	-12.81	27	-39.81	183	142	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL / 5825MHz)

HORIZONTAL RESULT

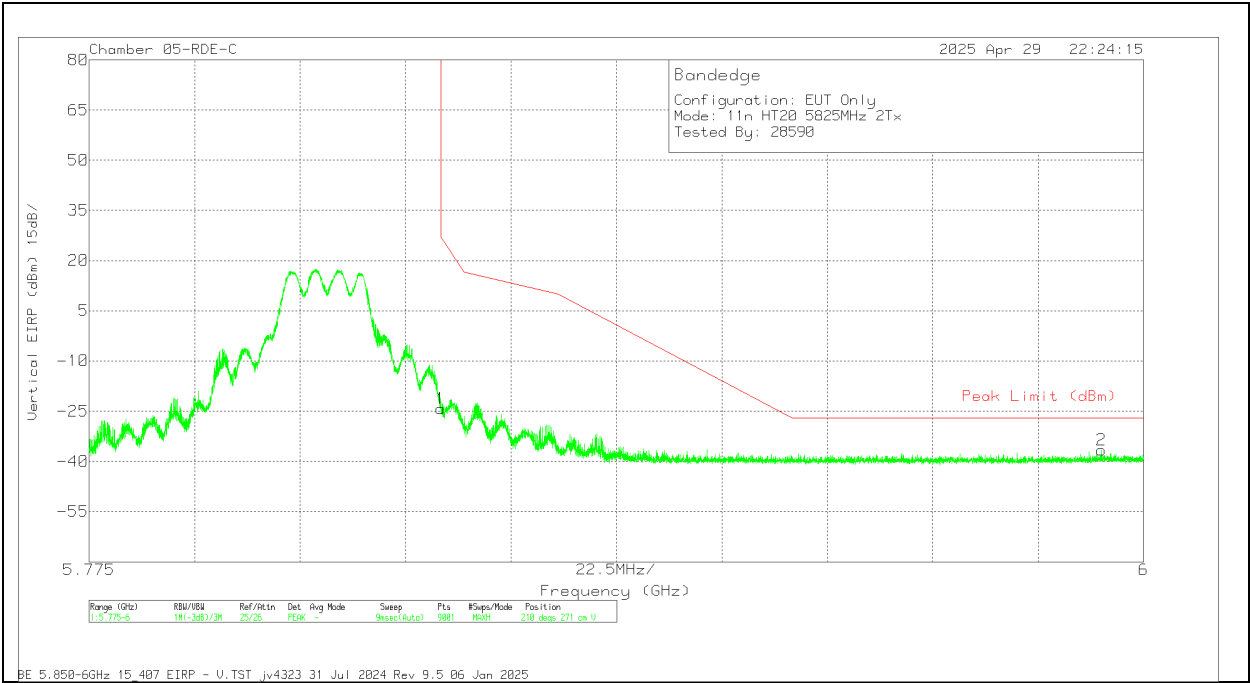


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230300 ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-24.02	Pk	35	11.8	-37.82	0	-15.04	27	-42.04	182	163	H
2	5.9438	-46.97	Pk	35.2	11.8	-37.48	0	-37.45	-27	-10.45	182	163	H

Pk - Peak detector

BANDEDGE (HIGH CHANNEL / 5825MHz)

VERTICAL RESULT

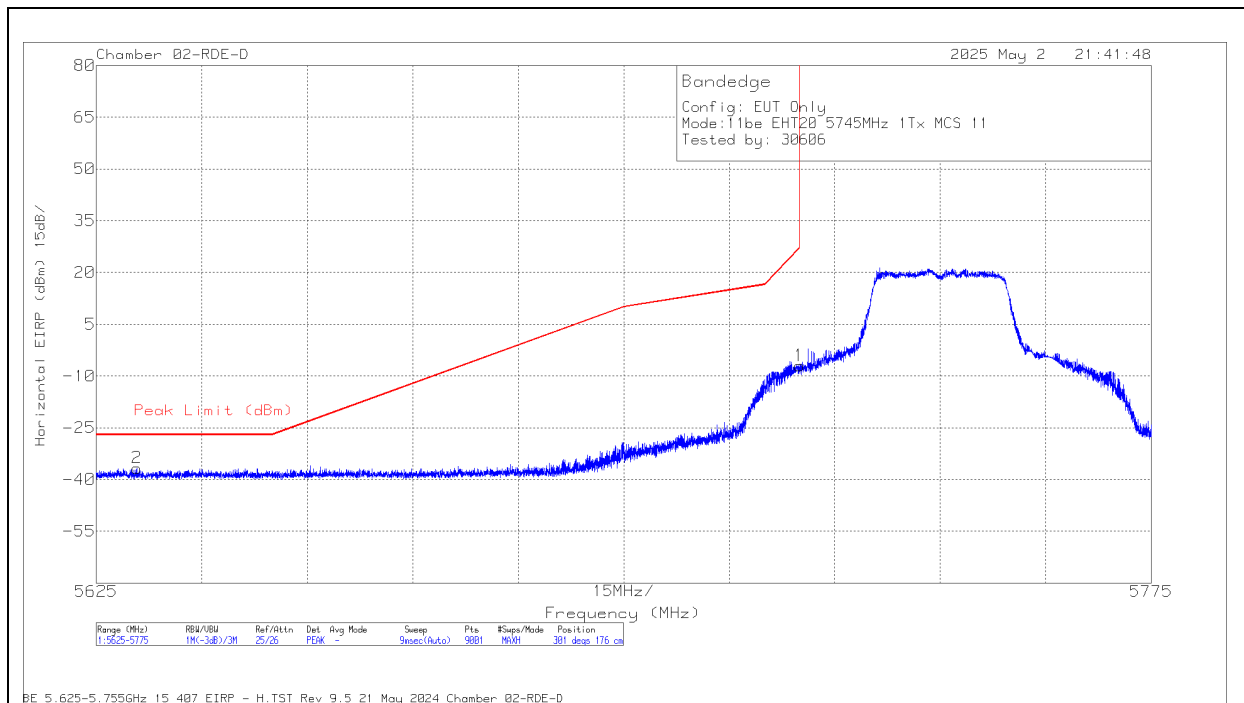


Pk - Peak detector

10.1.27. 802.11be SISO SU MODE IN UNII-3 BAND - BANDEDGES

UNII-3 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Conversio n Factor (dB)	Amp/Cb/Fl tr/Pad (dB)	DCCF (dB)	Correct Reading EIRP (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity		
EHT20 (SU Mode)	5745	6	5725	-19.31	Pk	34.9	11.8	-34.4	0	-7.01	27	-34.01	301	176	H		
			5630.767	-48.64	Pk	34.7	11.8	-34.5	0	-36.64	-27	-9.64	301	176	H		
			5725	-28.34	Pk	34.9	11.8	-34.4	0	-16.04	27	-43.04	278	176	V		
			5635.867	-48.84	Pk	34.7	11.8	-34.5	0	-36.84	-27	-9.84	278	176	V		
			5.85	-26.25	Pk	34.8	11.8	-33.2	0	-12.85	27	-39.85	332	218	H		
			5.958825	-48.38	Pk	35.1	11.8	-33.4	0	-34.88	-27	-7.88	332	218	H		
	5825		5.85	-34.32	Pk	34.8	11.8	-33.2	0	-20.92	27	-47.92	308	261	V		
			5.9487	-49.55	Pk	35.1	11.8	-33.33	0	-35.98	-27	-8.98	308	261	V		
	5745	5	5.648284	-46.85	Pk	34.6	11.8	-37.28	0	-37.73	-27	-10.73	211	219	H		
			5.725	-22.34	Pk	34.7	11.8	-36.96	0	-12.8	27	-39.8	211	219	H		
			5.637634	-46.84	Pk	34.6	11.8	-37.32	0	-37.76	-27	-10.76	189	190	V		
			5.725	-23.63	Pk	34.7	11.8	-36.96	0	-14.09	27	-41.09	189	190	V		
			5.85	-35.95	Pk	34.8	11.8	-33.2	0	-22.55	27	-49.55	272	226	H		
			5.930325	-47.37	Pk	35	11.8	-33.3	0	-33.87	-27	-6.87	272	226	H		
			5825		5.85	-34.62	Pk	34.8	11.8	-33.2	0	-21.22	27	-48.22	320	160	V
					5.933625	-49.69	Pk	35	11.8	-33.3	0	-36.19	-27	-9.19	320	160	V
EHT40 (SU Mode)	5755	6	5.725	-22.32	Pk	34.5	11.8	-32.8	0	-8.82	27	-35.82	164	188	H		
			5.649367	-47.37	Pk	34.3	11.8	-32.64	0	-33.91	-27	-6.91	164	188	H		
			5.725	-28.97	Pk	34.5	11.8	-32.8	0	-15.47	27	-42.47	315	331	V		
			5.643717	-49.18	Pk	34.3	11.8	-32.7	0	-35.78	-27	-8.78	315	331	V		
			5.85	-48.67	Pk	34.8	11.8	-33.2	0	-35.27	27	-62.27	150	169	H		
			5.968625	-49.11	Pk	35.1	11.8	-33.4	0	-35.61	-27	-8.61	150	169	H		
	5795		5.85	-49.44	Pk	34.8	11.8	-33.2	0	-36.04	27	-63.04	128	328	V		
			5.98495	-49.37	Pk	35.1	11.8	-33.4	0	-35.87	-27	-8.87	128	328	V		
	5755	5	5.725	-28.24	Pk	34.5	11.8	-32.8	0	-14.74	27	-41.74	343	112	H		
			5.644467	-47.44	Pk	34.3	11.8	-32.7	0	-34.04	-27	-7.04	343	112	H		
			5.725	-26.3	Pk	34.5	11.8	-32.8	0	-12.8	27	-39.8	322	151	V		
			5.649617	-45.24	Pk	34.3	11.8	-32.66	0	-31.8	-27	-4.8	322	151	V		
			5.85	-39.08	Pk	34.8	11.8	-33.2	0	-25.68	27	-52.68	269	244	H		
			5795		5.925875	-47.08	Pk	35	11.8	-33.3	0	-33.58	-27	-6.58	269	244	H
					5.85	-44.94	Pk	34.8	11.8	-33.2	0	-31.54	27	-58.54	315	219	V
					5.9306	-49.05	Pk	35	11.8	-33.3	0	-35.55	-27	-8.55	315	219	V
EHT80 (SU Mode)	5775 (Lower)	6	5.642867	-40.78	Pk	35	11.8	-38.49	0	-32.47	-27	-5.47	204	194	H		
			5.725	-21.83	Pk	35.1	11.8	-38.19	0	-13.12	27	-40.12	204	194	H		
			5.636634	-46.32	Pk	35	11.8	-38.4	0	-37.92	-27	-10.92	189	265	V		
			5.725	-30.6	Pk	35.1	11.8	-38.19	0	-21.89	27	-48.89	189	265	V		
			5.85	-23.27	Pk	35	11.8	-37.82	0	-14.29	27	-41.29	103	160	H		
			5.926775	-44.43	Pk	35.1	11.8	-37.55	0	-35.08	-27	-8.08	103	160	H		
	5775 (Upper)		5.85	-32.18	Pk	35	11.8	-37.82	0	-23.2	27	-50.2	83	327	V		
			5.935975	-46.72	Pk	35.1	11.8	-37.64	0	-37.46	-27	-10.46	83	327	V		
	5775 (Lower)	5	5.635317	-41.51	Pk	35	11.8	-38.4	0	-33.11	-27	-6.11	222	122	H		
			5.725	-26.64	Pk	35.1	11.8	-38.19	0	-17.93	27	-44.93	222	122	H		
			5.6351	-40.55	Pk	35	11.8	-38.41	0	-32.16	-27	-5.16	214	147	V		
			5.725	-25.79	Pk	35.1	11.8	-38.19	0	-17.08	27	-44.08	214	147	V		
			5.85	-29.78	Pk	35.1	11.8	-37.78	0	-20.66	27	-47.66	146	102	H		
			5775 (Upper)		5.929075	-42.15	Pk	35.3	11.8	-37.62	0	-32.67	-27	-5.67	146	102	H
					5.85	-32.84	Pk	35.1	11.8	-37.78	0	-23.72	27	-50.72	221	117	V
					5.929025	-44.57	Pk	35.3	11.8	-37.62	0	-35.09	-27	-8.09	221	117	V

Pk - Peak detector

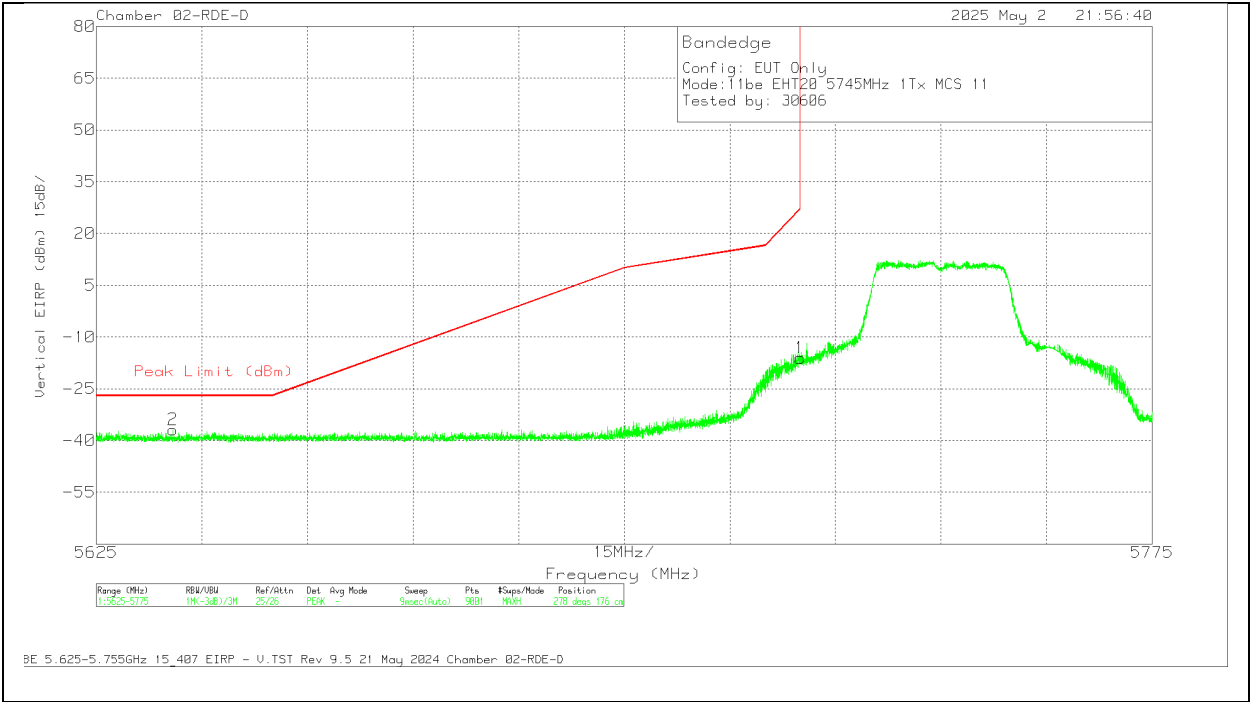
BANDEDGE (LOW CHANNEL / 5745MHz)**HORIZONTAL RESULT**

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	226674 ACF (dB/m)	Conversion Factor (dB)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	-19.31	Pk	34.9	11.8	-34.4	0	-7.01	27	-34.01	301	176	H
2	5630.767	-48.64	Pk	34.7	11.8	-34.5	0	-36.64	-27	-9.64	301	176	H

Pk - Peak detector

BANDEDGE (LOW CHANNEL / 5745MHz)

VERTICAL RESULT

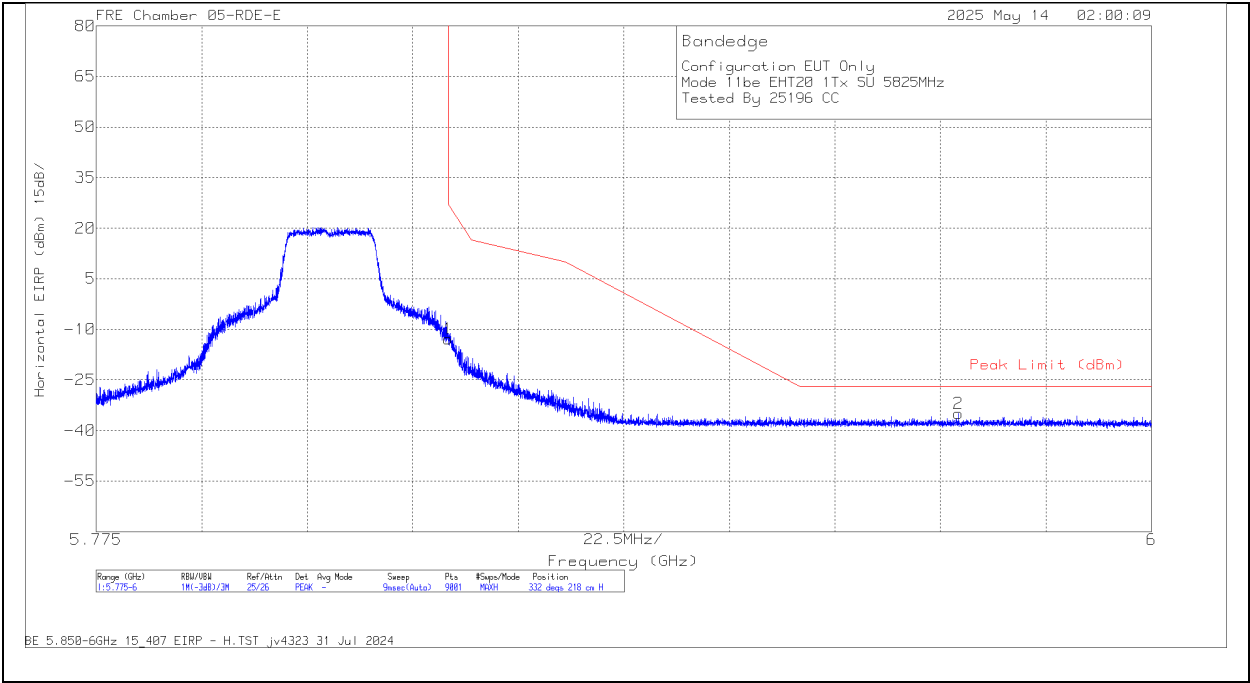


Marker	Frequency (MHz)	Meter Reading (dBm)	Det	226674 ACF (dB/m)	Conversion Factor (dB)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	-28.34	Pk	34.9	11.8	-34.4	0	-16.04	27	-43.04	278	176	V
2	5635.867	-48.84	Pk	34.7	11.8	-34.5	0	-36.84	-27	-9.84	278	176	V

Pk - Peak detector

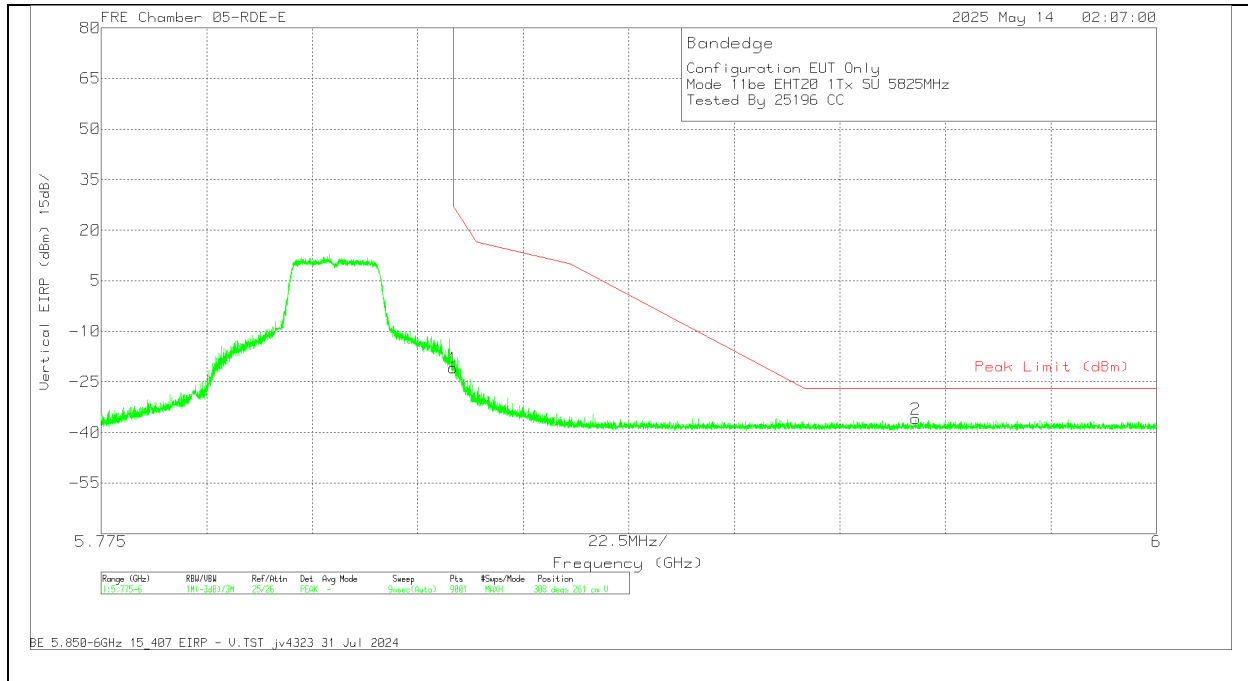
BANDEDGE (HIGH CHANNEL / 5825MHz)

HORIZONTAL RESULT



Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80404 ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-26.25	Pk	34.8	11.8	-33.2	0	-12.85	27	-39.85	332	218	H
2	5.958825	-48.38	Pk	35.1	11.8	-33.4	0	-34.88	-27	-7.88	332	218	H

Pk - Peak detector

BANDEDGE (HIGH CHANNEL / 5825MHz)**VERTICAL RESULT**

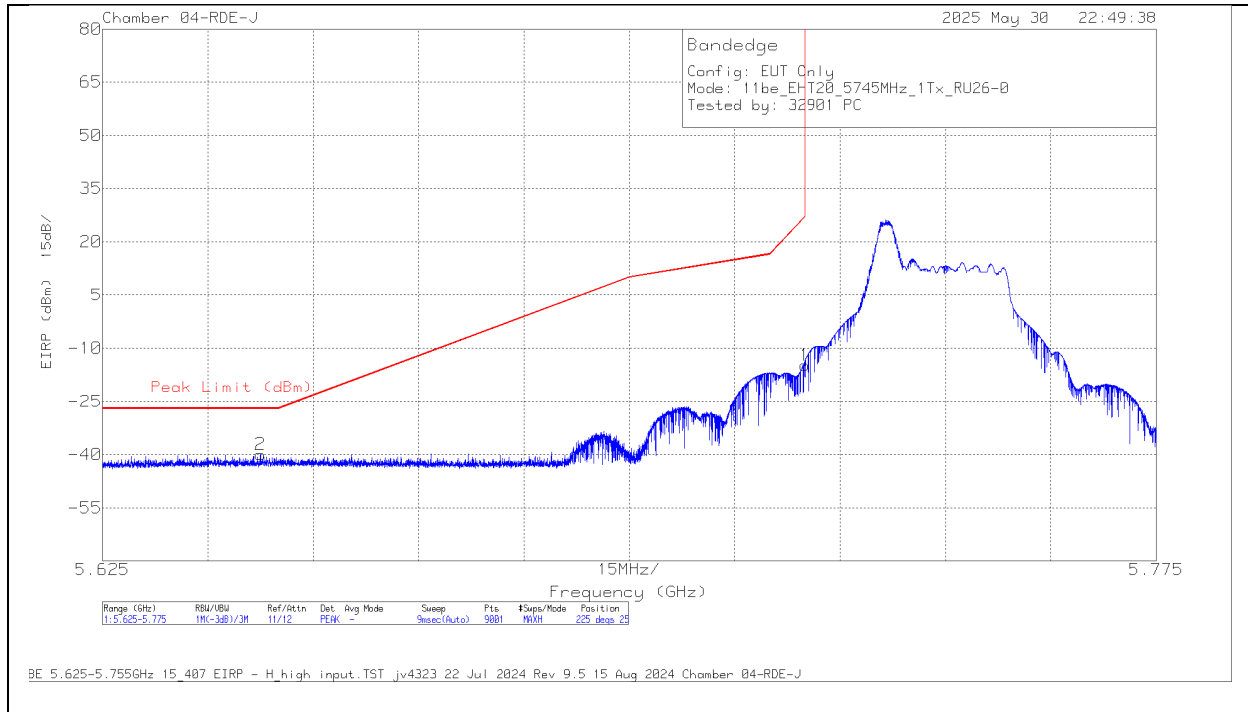
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80404 ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-34.32	Pk	34.8	11.8	-33.2	0	-20.92	-27	-47.92	308	261	V
2	5.9487	-49.55	Pk	35.1	11.8	-33.33	0	-35.98	-27	-8.98	308	261	V

Pk - Peak detector

10.1.28. 802.11be SISO PARTIAL RU MODE IN UNII-3 BAND – BANDEDGES

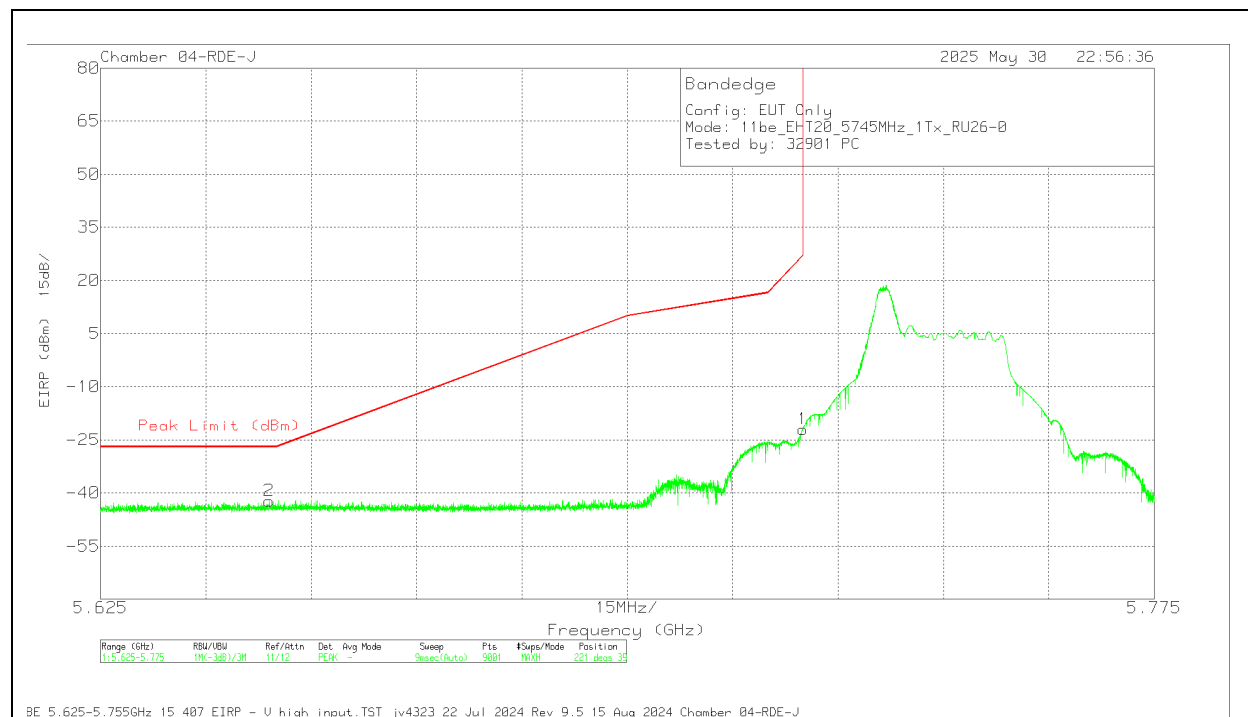
UNII-3 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Conversion Factor (dB)	Amp/Cb/Fltr/Pad (dB)	DCCF (dB)	Correct Reading EIRP (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 26) / Index 0	5745	6	5.647484	-62.85	Pk	34.7	11.8	-23.6	0	-39.95	-27	-12.95	225	255	H
			5.725	-38.29	Pk	34.8	11.8	-23.1	0	-14.79	27	-41.79	225	255	H
			5.649	-65.22	Pk	34.7	11.8	-23.5	0	-42.22	-27	-15.22	221	397	V
			5.725	-45.51	Pk	34.8	11.8	-23.1	0	-22.01	27	-49.01	221	397	V
EHT20 (RU 26) / Index 8	5825		5.85	-31.4	Pk	35.1	11.8	-37.78	0	-22.28	27	-49.28	39	156	H
			5.959225	-46.37	Pk	35.3	11.8	-37.52	0	-36.79	-27	-9.79	39	156	H
			5.85	-38.58	Pk	35.1	11.8	-37.78	0	-29.46	27	-56.46	15	144	V
			5.997	-47.71	Pk	35.3	11.8	-37.53	0	-38.14	-27	-11.14	15	144	V
EHT20 (RU 26) / Index 0	5745	5	5.6319	-47.37	Pk	35	11.8	-38.42	0	-38.99	-27	-11.99	78	208	H
			5.725	-39.62	Pk	35.1	11.8	-38.19	0	-30.91	27	-57.91	78	208	H
			5.649	-65.22	Pk	34.7	-23.5	11.8	0	-42.22	-27	-15.22	221	397	V
			5.725	-45.51	Pk	34.8	-23.1	11.8	0	-22.01	27	-49.01	221	397	V
EHT20 (RU 26) / Index 8	5825		5.85	-69.57	Pk	34.9	11.8	-16.4	0	-39.27	27	-66.27	234	387	H
			5.98864	-67.13	Pk	35.2	11.8	-16.4	0	-36.53	-27	-9.53	234	387	H
			5.85	-64.16	Pk	34.9	11.8	-16.4	0	-33.86	27	-60.86	281	131	V
			5.943071	-66.82	Pk	35.2	11.8	-16.2	0	-36.02	-27	-9.02	281	131	V
EHT40 (RU 106)	5755 (Index 53)	6	5.629	-48.22	Pk	34.8	11.8	-36.59	0	-38.21	-27	-11.21	164	147	H
			5.725	-33.43	Pk	34.9	11.8	-36.29	0	-23.02	27	-50.02	164	147	H
			5.644667	-48.74	Pk	34.8	11.8	-36.59	0	-38.73	-27	-11.73	133	257	V
			5.725	-39.98	Pk	34.9	11.8	-36.29	0	-29.57	27	-56.57	133	257	V
	5795 (Index 56)		5.85	-50.65	Pk	35.1	11.8	-35.92	0	-39.67	27	-66.67	163	113	H
			5.9962	-48.72	Pk	35.3	11.8	-35.76	0	-37.38	-27	-10.38	163	113	H
			5.85	-51.51	Pk	35.1	11.8	-35.92	0	-40.53	27	-67.53	208	192	V
			5.984125	-48.84	Pk	35.3	11.8	-35.74	0	-37.48	-27	-10.48	208	192	V
	5755 (Index 53)	5	5.641134	-47.61	Pk	34.8	11.8	-36.56	0	-37.57	-27	-10.57	94	188	H
			5.725	-36.61	Pk	34.9	11.8	-36.29	0	-26.2	27	-53.2	94	188	H
			5.639884	-48.63	Pk	34.8	11.8	-36.57	0	-38.6	-27	-11.6	122	197	V
			5.725	-39.94	Pk	34.9	11.8	-36.29	0	-29.53	27	-56.53	122	197	V
	5795 (Index 56)		5.85	-51.42	Pk	35.1	11.8	-35.92	0	-40.44	27	-67.44	91	216	H
			5.944925	-48.82	Pk	35.2	11.8	-35.85	0	-37.67	-27	-10.67	91	216	H
			5.85	-50.01	Pk	35.1	11.8	-35.92	0	-39.03	27	-66.03	154	156	V
			5.96365	-48.22	Pk	35.2	11.8	-35.83	0	-37.05	-27	-10.05	154	156	V
EHT80 (RU 484)	5775 (Lower) (Index 65)	6	5.725	-30.73	Pk	34.5	11.8	-35	0	-19.43	27	-46.43	330	115	H
			5.630767	-48.55	Pk	34.3	11.8	-34.9	0	-37.35	-27	-10.35	330	115	H
			5.725	-40.36	Pk	34.5	11.8	-35	0	-29.06	27	-56.06	319	275	V
			5.636217	-49.93	Pk	34.3	11.8	-34.84	0	-38.67	-27	-11.67	319	275	V
	5775 (Upper) (Index 66)		5.85	-44.73	Pk	34.8	11.8	-34.8	0	-32.93	27	-59.93	314	243	H
			5.999675	-50.02	Pk	35.2	11.8	-34.73	0	-37.75	-27	-10.75	314	243	H
			5.85	-49.71	Pk	34.8	11.8	-34.8	0	-37.91	27	-64.91	318	280	V
			5.9675	-49.68	Pk	35.1	11.8	-34.7	0	-37.48	-27	-10.48	318	280	V
	5775 (Lower) (Index 65)	5	5.642317	-47.52	Pk	35	11.8	-38.45	0	-39.17	-27	-12.17	68	188	H
			5.725	-28.27	Pk	35.1	11.8	-38.19	0	-19.56	27	-46.56	68	188	H
			5.632833	-47.52	Pk	35	11.8	-38.46	0	-39.18	-27	-12.18	358	180	V
			5.725	-28.55	Pk	35.1	11.8	-38.19	0	-19.84	27	-46.84	358	180	V
	5775 (Upper) (Index 66)		5.85	-43.21	Pk	35.1	11.8	-37.78	0	-34.09	27	-61.09	327	102	H
			5.93885	-47.18	Pk	35.3	11.8	-37.64	0	-37.72	-27	-10.72	327	102	H
			5.85	-47.42	Pk	35.1	11.8	-37.78	0	-38.3	27	-65.3	15	125	V
			5.951325	-47.66	Pk	35.3	11.8	-37.54	0	-38.1	-27	-11.1	15	125	V
EHT80 (RU 106)	5775 (Lower) (Index 53)	6	5.725	-40.86	Pk	34.5	11.8	-35	0	-29.56	27	-56.56	333	210	H
			5.633284	-49.41	Pk	34.3	11.8	-34.83	0	-38.14	-27	-11.14	333	210	H
			5.725	-48.48	Pk	34.5	11.8	-35	0	-37.18	27	-64.18	315	284	V
			5.642367	-49.75	Pk	34.3	11.8	-34.97	0	-38.62	-27	-11.62	315	284	V
	5775 (Upper) (Index 60)		5.85	-50.61	Pk	34.8	11.8	-34.8	0	-38.81	27	-65.81	340	170	H
			5.9953	-49.52	Pk	35.2	11.8	-34.73	0	-37.25	-27	-10.25	340	170	H
			5.85	-50.61	Pk	34.8	11.8	-34.8	0	-38.81	27	-65.81	340	170	H
			5.9953	-49.52	Pk	35.2	11.8	-34.73	0	-37.25	-27	-10.25	340	170	H
	5775 (Lower) (Index 53)	5	5.643084	-47.4	Pk	35	11.8	-38.5	0	-39.1	-27	-12.1	68	188	H
			5.725	-38.02	Pk	35.1	11.8	-38.19	0	-29.31	27	-56.31	68	188	H
			5.637767	-47.36	Pk	35	11.8	-38.4	0	-38.96	-27	-11.96	357	179	V
			5.725	-36.58	Pk	35.1	11.8	-38.19	0	-27.87	27	-54.87	357	179	V
	5775 (Upper) (Index 60)		5.85	-48.12	Pk	35.1	11.8	-37.78	0	-39	27	-66	327	102	H
			5.96055	-46.96	Pk	35.3	11.8	-37.51	0	-37.37	-27	-10.37	327	102	H
			5.85	-49.4	Pk	35.1	11.8	-37.78	0	-40.28	27	-67.28	15	125	V
			5.94715	-47.65	Pk	35.3	11.8	-37.62	0	-38.17	-27	-11.17	15	125	V

Pk - Peak detector

1TX Antenna 6 MODE: PARTIAL RU 26**BANDEDGE (LOW CHANNEL / 5745MHz)****HORIZONTAL RESULT**

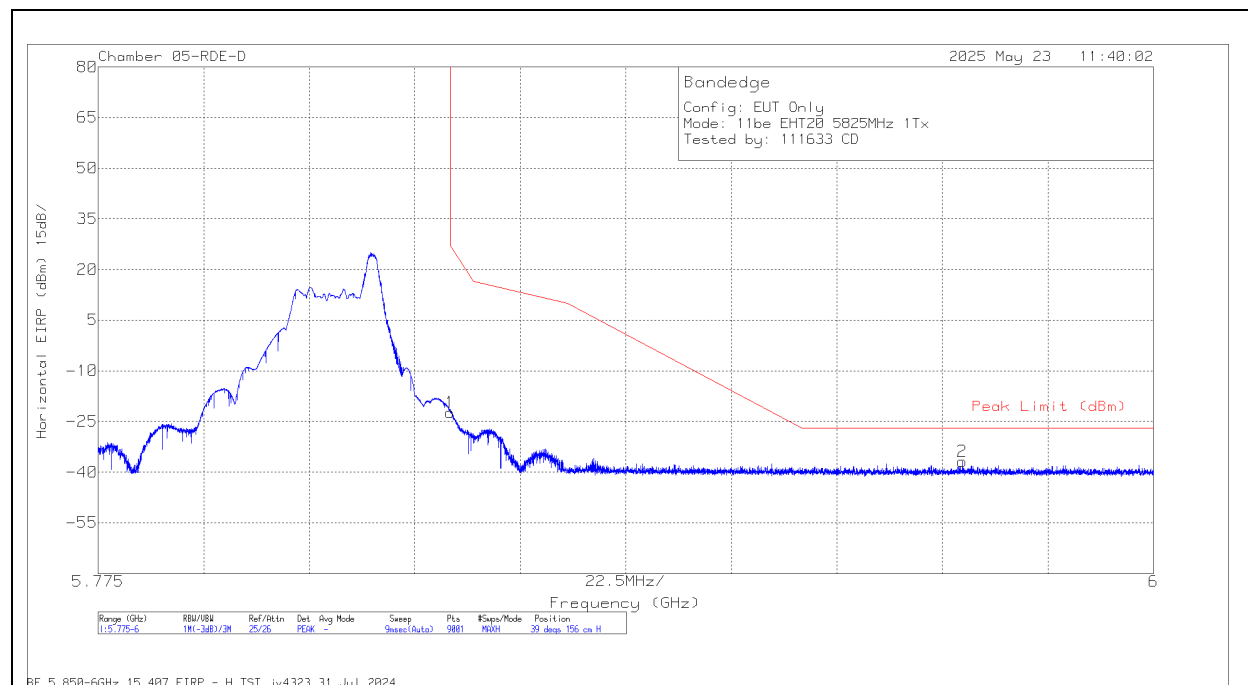
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80707 ACF (dB/m)	Conversion Factor (dB)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.647484	-62.85	Pk	34.7	11.8	-23.6	0	-39.95	-27	-12.95	225	255	H
1	5.725	-38.29	Pk	34.8	11.8	-23.1	0	-14.79	27	-41.79	225	255	H

Pk - Peak detector

1TX Antenna 6 MODE: PARTIAL RU 26**BANDEDGE (LOW CHANNEL / 5745MHz)****VERTICAL RESULT**

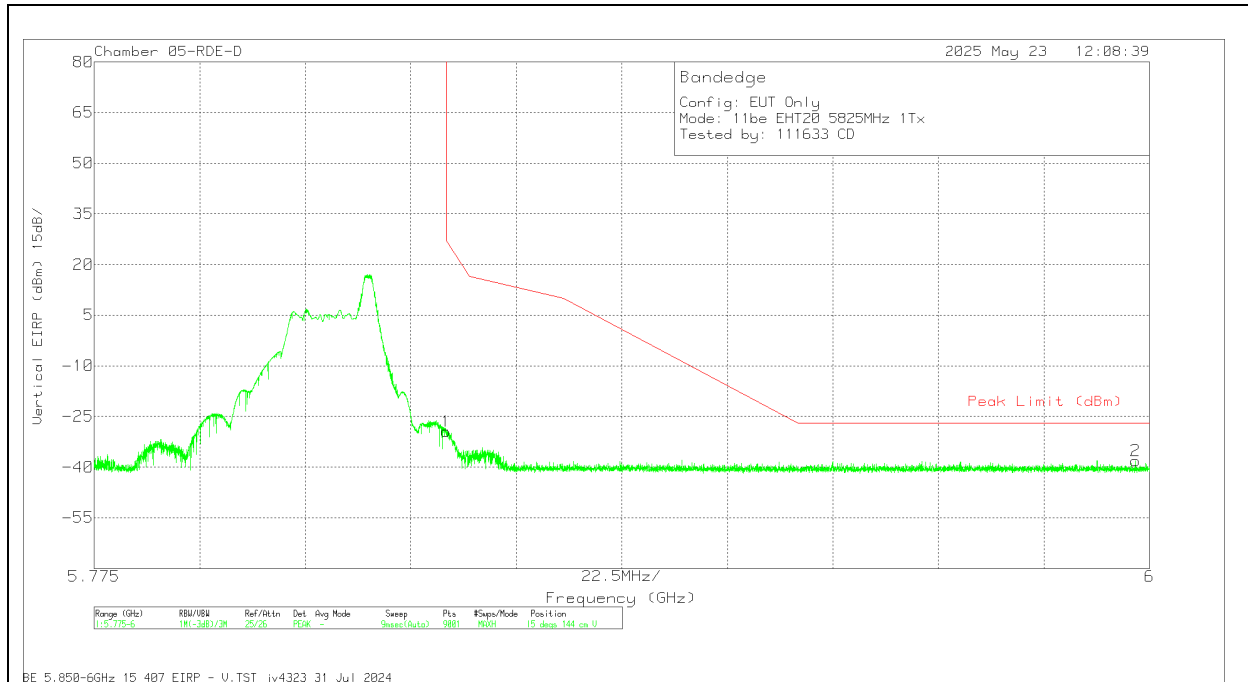
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80707 ACF (dB/m)	Conversion Factor (dB)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.649	-65.22	Pk	34.7	11.8	-23.5	0	-42.22	-27	-15.22	221	397	V
1	5.725	-45.51	Pk	34.8	11.8	-23.1	0	-22.01	27	-49.01	221	397	V

Pk - Peak detector

1TX Antenna 6 MODE: PARTIAL RU 26**BANDEDGE (HIGH CHANNEL / 5825MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-31.4	Pk	35.1	11.8	-37.78	0	-22.28	27	-49.28	39	156	H
2	5.959225	-46.37	Pk	35.3	11.8	-37.52	0	-36.79	-27	-9.79	39	156	H

Pk - Peak detector

1TX Antenna 6 MODE: PARTIAL RU 26**BANDEDGE (HIGH CHANNEL / 5825MHz)****VERTICAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-38.58	Pk	35.1	11.8	-37.78	0	-29.46	27	-56.46	15	144	V
2	5.997	-47.71	Pk	35.3	11.8	-37.53	0	-38.14	-27	-11.14	15	144	V

Pk - Peak detector

10.1.29. 802.11be MIMO SU MODE IN UNII-3 BAND - BANDEDGES

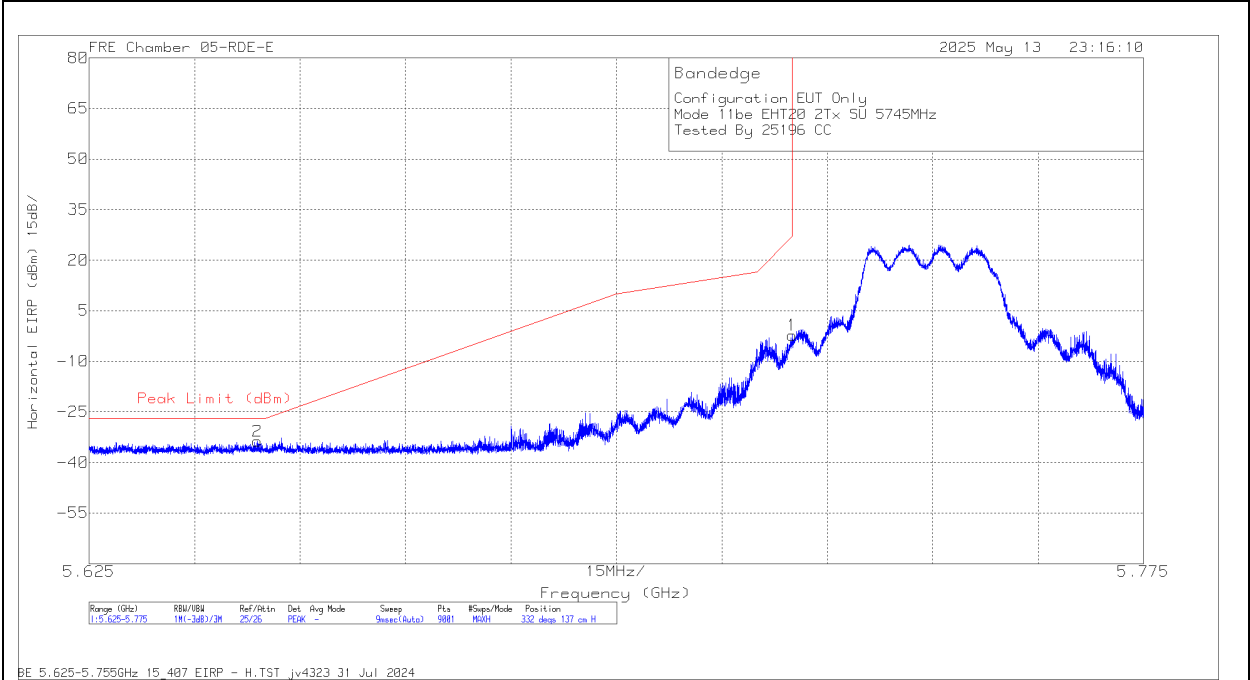
UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Conversio n Factor (dB)	Amp/Cbl/FI tr/Pad (dB)	DCCF (dB)	Correct Reading EIRP (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degr)	Height (cm)	Polarity
EHT20 (SU Mode)	5745	6 + 5	5.725	-15.77	Pk	34.5	11.8	-32.8	0	-2.27	27	-29.27	332	137	H
			5.64895	-47.23	Pk	34.3	11.8	-32.6	0	-33.73	-27	-6.73	332	137	H
			5.725	-25.77	Pk	34.5	11.8	-32.8	0	-12.27	27	-39.27	295	136	V
			5.637167	-49.37	Pk	34.3	11.8	-32.6	0	-35.87	-27	-8.87	295	136	V
	5825		5.85	-23.18	Pk	34.8	11.8	-33.2	0	-9.78	27	-36.78	332	108	H
			5.9488	-48.83	Pk	35.1	11.8	-33.32	0	-35.25	-27	-8.25	332	108	H
			5.85	-32.29	Pk	34.8	11.8	-33.2	0	-18.89	27	-45.89	311	120	V
				5.925175	-49.58	Pk	35	11.8	-33.3	0	-36.08	-27	-9.08	311	120
EHT40 (SU Mode)	5755	6 + 5	5.725	-22.75	Pk	34.5	11.8	-32.8	0	-9.25	27	-36.25	336	241	H
			5.651067	-44.36	Pk	34.3	11.8	-32.7	0	-30.96	-26.21	-4.75	336	241	H
			5.725	-28.4	Pk	34.5	11.8	-32.8	0	-14.9	27	-41.9	314	224	V
			5.6441	-48.93	Pk	34.3	11.8	-32.7	0	-35.53	-27	-8.53	314	224	V
	5795		5.85	-35.53	Pk	34.8	11.8	-33.2	0	-22.13	27	-49.13	328	211	H
			5.9362	-47.62	Pk	35	11.8	-33.3	0	-34.12	-27	-7.12	328	211	H
			5.85	-41.66	Pk	34.8	11.8	-33.2	0	-28.26	27	-55.26	305	360	V
				5.92605	-48.44	Pk	35	11.8	-33.3	0	-34.94	-27	-7.94	305	360
EHT80 (SU Mode)	5775 (Lower)	6 + 5	5.650501	-39.7	Pk	35	11.8	-38.42	0	-31.32	-26.63	-4.69	15	157	H
			5.725	-22.39	Pk	35.1	11.8	-38.19	0	-13.68	27	-40.68	15	157	H
			5.650367	-45.3	Pk	35	11.8	-38.44	0	-36.94	-26.73	-10.21	352	121	V
			5.725	-30.94	Pk	35.1	11.8	-38.19	0	-22.23	27	-49.23	352	121	V
	5775 (Upper)		5.85	-31.67	Pk	35.1	11.8	-37.78	0	-22.55	27	-49.55	248	124	H
			5.929275	-43	Pk	35.3	11.8	-37.64	0	-33.54	-27	-6.54	248	124	H
			5.85	-28.27	Pk	35.1	11.8	-37.78	0	-19.15	27	-46.15	174	106	V
			5.9291	-44.79	Pk	35.3	11.8	-37.63	0	-35.32	-27	-8.32	174	106	V

Pk - Peak detector

2TX Antenna 6 + Antenna 5 OFDMA MODE: SU, Single User

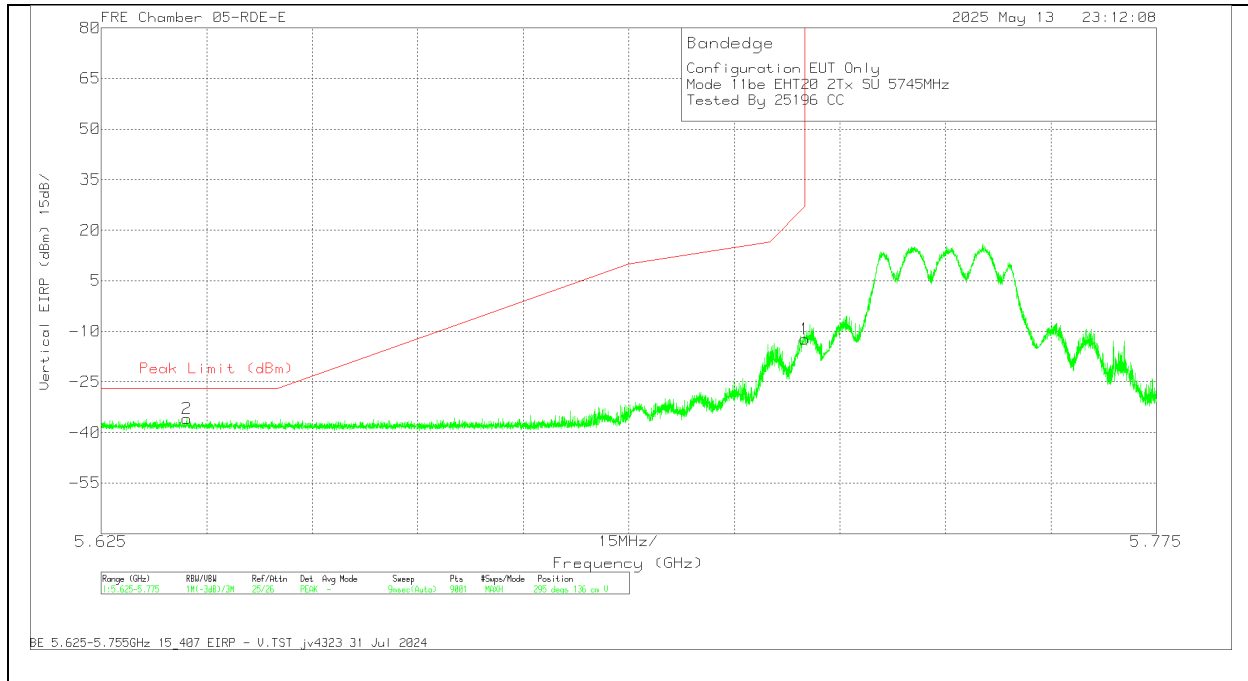
BANDEDGE (LOW CHANNEL / 5745MHz)

HORIZONTAL RESULT



Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80404 ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-15.77	Pk	34.5	11.8	-32.8	0	-2.27	27	-29.27	332	137	H
2	5.64895	-47.23	Pk	34.3	11.8	-32.6	0	-33.73	-27	-6.73	332	137	H

Pk - Peak detector

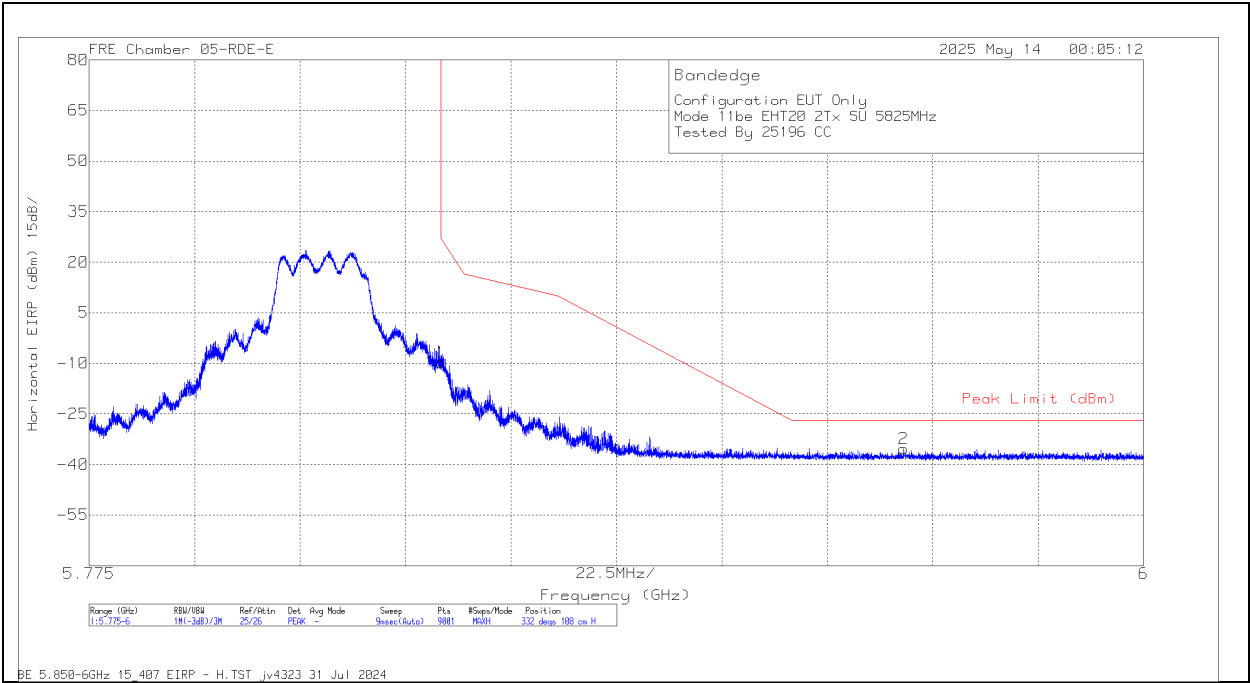
BANDEDGE (LOW CHANNEL / 5745MHz)**VERTICAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80404 ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-25.77	Pk	34.5	11.8	-32.8	0	-12.27	27	-39.27	295	136	V
2	5.637167	-49.37	Pk	34.3	11.8	-32.6	0	-35.87	-27	-8.87	295	136	V

Pk - Peak detector

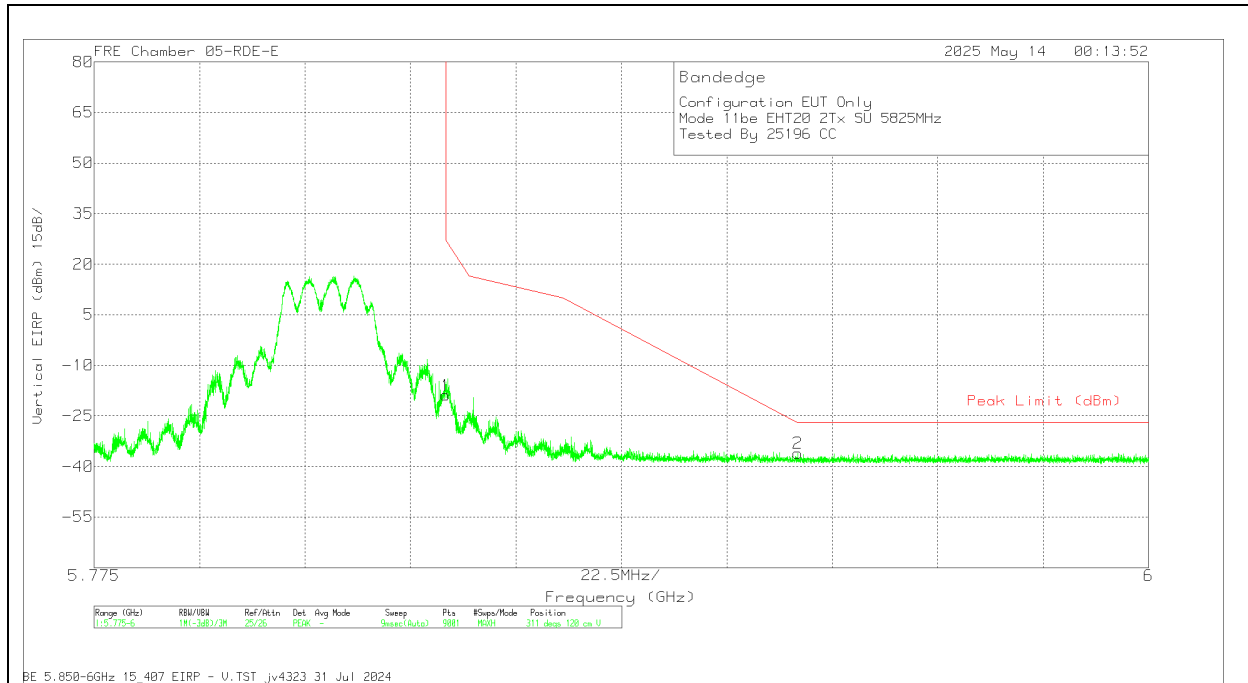
BANDEDGE (HIGH CHANNEL / 5825MHz)

HORIZONTAL RESULT



Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80404 ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-23.18	Pk	34.8	11.8	-33.2	0	-9.78	27	-36.78	332	108	H
2	5.9488	-48.83	Pk	35.1	11.8	-33.32	0	-35.25	-27	-8.25	332	108	H

Pk - Peak detector

BANDEDGE (HIGH CHANNEL / 5825MHz)**VERTICAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80404 ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-32.29	Pk	34.8	11.8	-33.2	0	-18.89	27	-45.89	311	120	V
2	5.925175	-49.58	Pk	35	11.8	-33.3	0	-36.08	-27	-9.08	311	120	V

Pk - Peak detector

10.1.30. 802.11be MIMO PARTIAL RU MODE IN UNII-3 BAND - BANDEDGES

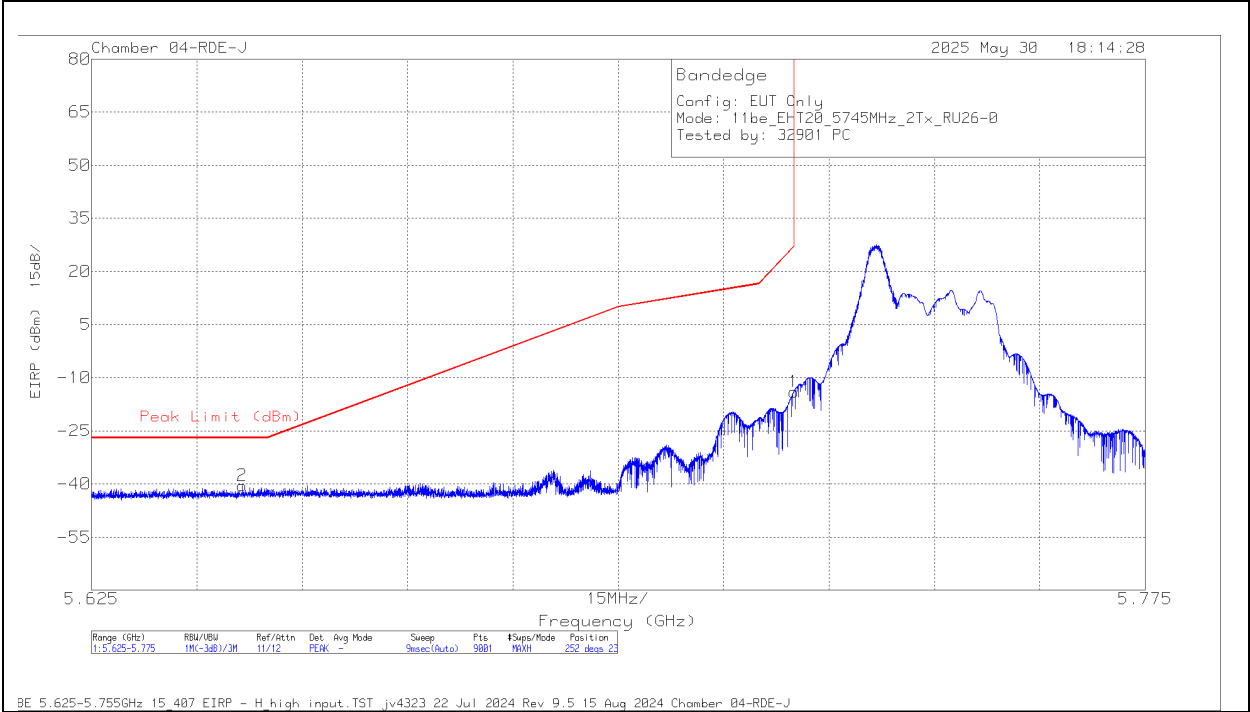
UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Conversio n Factor (dB)	Amp/Cbl/FI tr/Pad (dB)	DCCF (dB)	Correct Reading EIRP (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 26) / Index 0	5745	6 + 5	5.64645	-63.48	Pk	34.7	11.8	-23.5	0	-40.48	-27	-13.48	252	239	H
			5.725	-37.5	Pk	34.8	11.8	-23.1	0	-14	27	-41	252	239	H
			5.649751	-64.32	Pk	34.7	11.8	-23.5	0	-41.32	-27	-14.32	239	219	V
			5.725	-46.08	Pk	34.8	11.8	-23.1	0	-22.58	27	-49.58	239	219	V
EHT20 (RU 26) / Index 8	5825		5.85	-31.41	Pk	35.1	11.8	-37.78	0	-22.29	27	-49.29	224	144	H
			5.946425	-47.35	Pk	35.3	11.8	-37.6	0	-37.85	-27	-10.85	224	144	H
			5.85	-38.31	Pk	35.1	11.8	-37.78	0	-29.19	27	-56.19	209	276	V
			5.972425	-48.17	Pk	35.3	11.8	-37.53	0	-38.6	-27	-11.6	209	276	V
EHT40 (RU 106)	5755 (Index 53)	6 + 5	5.634284	-46.91	Pk	35	11.8	-38.43	0	-38.54	-27	-11.54	31	313	H
			5.725	-34.28	Pk	35.1	11.8	-38.19	0	-25.57	27	-52.57	31	313	H
			5.629233	-47.51	Pk	35	11.8	-38.5	0	-39.21	-27	-12.21	12	279	V
			5.725	-44.28	Pk	35.1	11.8	-38.19	0	-35.57	27	-62.57	12	279	V
	5795 (Index 56)		5.85	-50.4	Pk	35.1	11.8	-37.78	0	-41.28	27	-68.28	37	266	H
			5.940475	-47.31	Pk	35.3	11.8	-37.67	0	-37.88	-27	-10.88	37	266	H
			5.85	-49.08	Pk	35.1	11.8	-37.78	0	-39.96	27	-66.96	16	304	V
			5.986175	-47.57	Pk	35.3	11.8	-37.51	0	-37.98	-27	-10.98	16	304	V
EHT80 (RU 484)	5775 (Lower) (Index 65)	6 + 5	5.725	-22.41	Pk	35.1	11.8	-37.88	0	-13.39	27	-40.39	325	174	H
			5.649434	-46.75	Pk	35	11.8	-38.05	0	-38	-27	-11	325	174	H
			5.725	-37.61	Pk	35.1	11.8	-37.88	0	-28.59	27	-55.59	313	166	V
			5.641017	-47.22	Pk	34.9	11.8	-38.09	0	-38.61	-27	-11.61	313	166	V
	5775 (Upper) (Index 66)		5.85	-36.71	Pk	35.3	11.8	-37.69	0	-27.3	27	-54.3	154	184	H
			5.9434	-46.87	Pk	35.4	11.8	-37.41	0	-37.08	-27	-10.08	154	184	H
			5.85	-43.58	Pk	35.3	11.8	-37.69	0	-34.17	27	-61.17	141	252	V
			5.999675	-48.11	Pk	35.7	11.8	-37.34	0	-37.95	-27	-10.95	141	252	V
EHT80 (RU 106)	5775 (Lower) (Index 53)	6 + 5	5.725	-31.3	Pk	35.1	11.8	-37.88	0	-22.28	27	-49.28	158	216	H
			5.638917	-46.62	Pk	34.9	11.8	-38.09	0	-38.01	-27	-11.01	158	216	H
			5.725	-40.32	Pk	35.1	11.8	-37.88	0	-31.3	27	-58.3	135	177	V
			5.629183	-47.58	Pk	35	11.8	-38.2	0	-38.98	-27	-11.98	135	177	V
	5775 (Upper) (Index 60)		5.85	-50.13	Pk	35.1	11.8	-37.78	0	-41.01	27	-68.01	13	369	H
			5.94985	-47.19	Pk	35.3	11.8	-37.62	0	-37.71	-27	-10.71	13	369	H
			5.85	-49.89	Pk	35.1	11.8	-37.78	0	-40.77	27	-67.77	79	382	V
			5.938225	-47.65	Pk	35.3	11.8	-37.7	0	-38.25	-27	-11.25	79	382	V

Pk - Peak detector

2TX Antenna 6 + Antenna 5 OFDMA MODE: PARTIAL RU 26

BANDEGE (LOW CHANNEL / 5745MHZ)

HORIZONTAL RESULT



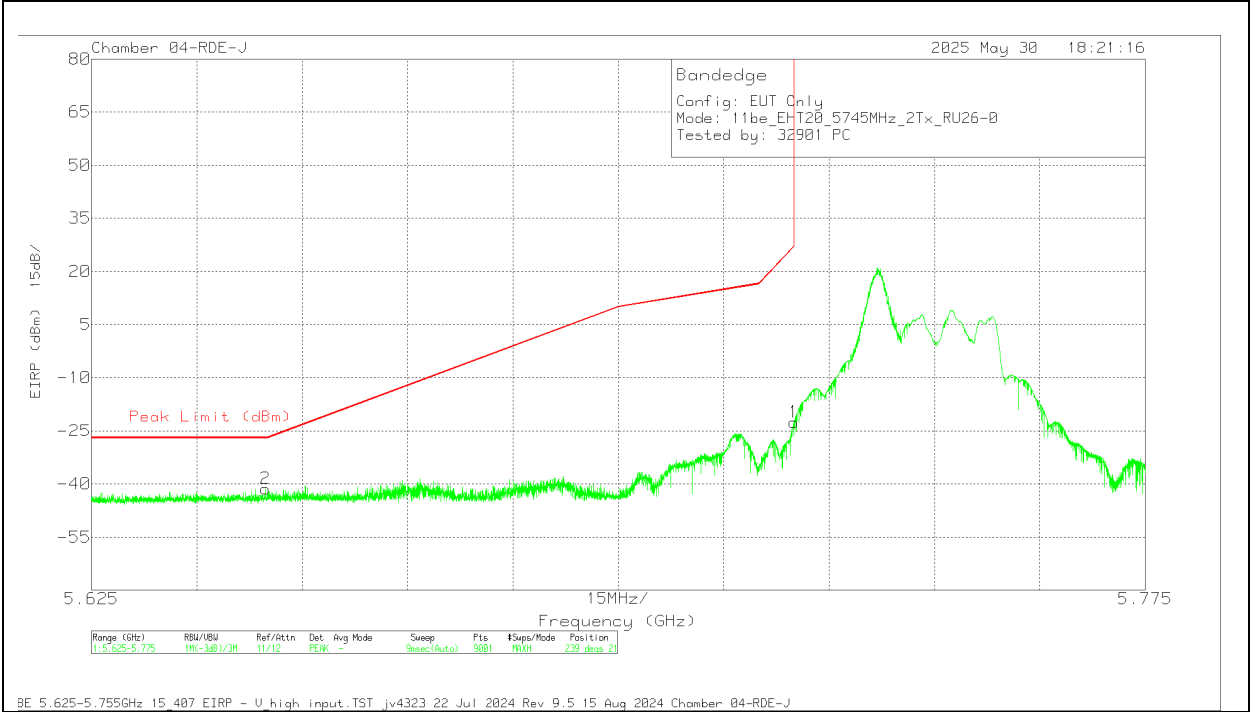
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80707 ACF (dB/m)	Amp/Cbl (dB)	Conversion Factor (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64645	-63.48	Pk	34.7	-23.5	11.8	0	-40.48	-27	-13.48	252	239	H
1	5.725	-37.5	Pk	34.8	-23.1	11.8	0	-14	27	-41	252	239	H

Pk - Peak detector

2TX Antenna 6 + Antenna 5 OFDMA MODE: PARTIAL RU 26

BANDEDGE (LOW CHANNEL / 5745MHz)

VERTICAL RESULT



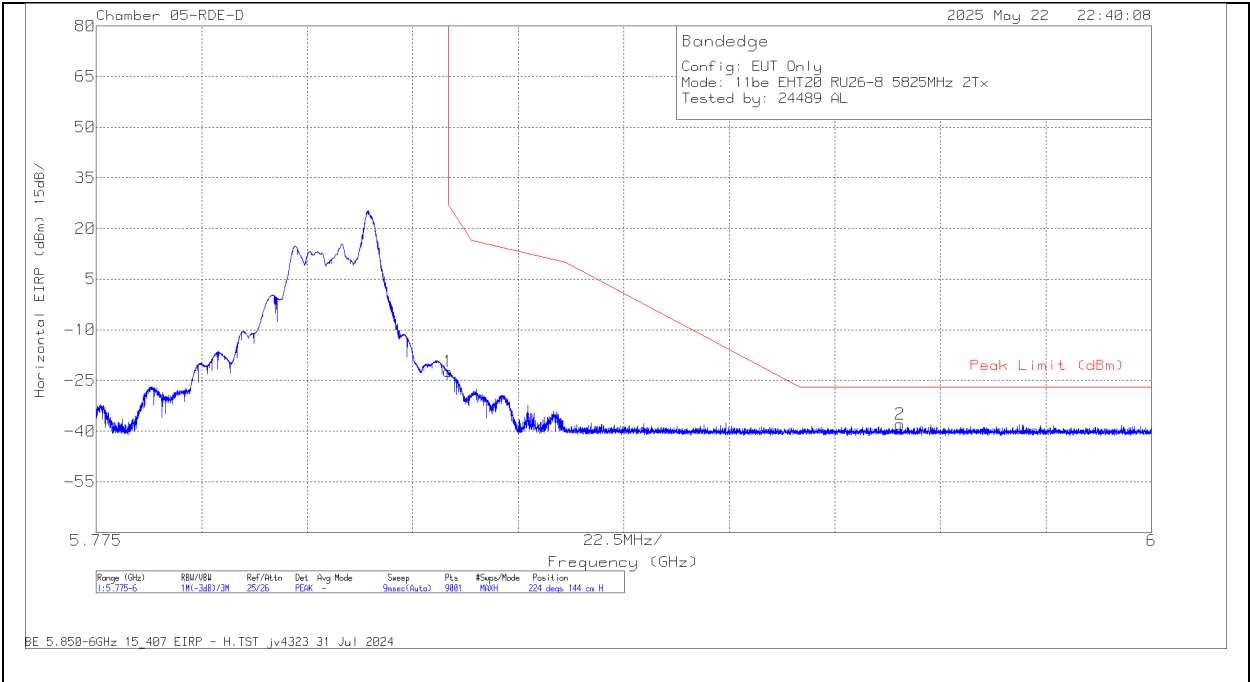
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80707 ACF (dB/m)	Amp/Cbl (dB)	Conversion Factor (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.649751	-64.32	Pk	34.7	-23.5	11.8	0	-41.32	-27	-14.32	239	219	V
1	5.725	-46.08	Pk	34.8	-23.1	11.8	0	-22.58	27	-49.58	239	219	V

Pk - Peak detector

2TX Antenna 6 + Antenna 5 OFDMA MODE: PARTIAL RU 26

BANDEDGE (HIGH CHANNEL / 5825MHz)

HORIZONTAL RESULT



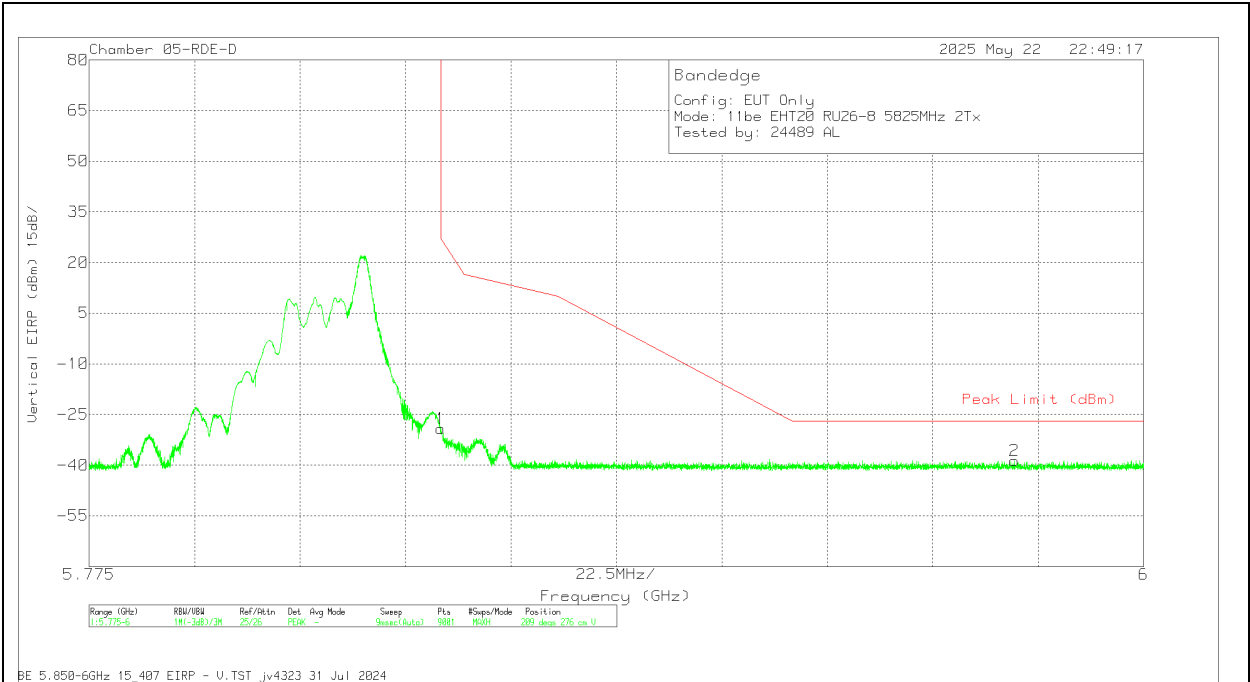
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-31.41	Pk	35.1	11.8	0	-37.78	-22.29	27	-49.29	224	144	H
2	5.946425	-47.35	Pk	35.3	11.8	0	-37.6	-37.85	-27	-10.85	224	144	H

Pk - Peak detector

2TX Antenna 6 + Antenna 5 OFDMA MODE: PARTIAL RU 26

BANDEDGE (HIGH CHANNEL / 5825MHz)

VERTICAL RESULT



Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-38.31	Pk	35.1	11.8	0	-37.78	-29.19	27	-56.19	209	276	V
2	5.972425	-48.17	Pk	35.3	11.8	0	-37.53	-38.6	-27	-11.6	209	276	V

Pk - Peak detector

10.1.31. 802.11n/ac MIMO MODE IN UNII-3 BAND – SPURIOUS EMISSIONS

20MHz

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5745	6 + 5	* 2.755715	56.37	PK-U	32.2	-46.16	0	42.41	-	-	74	-31.59	226	309	H
			* 2.753929	44.39	ADR	32.2	-46.13	0	30.46	54	-23.54	-	-	226	309	H
			* 3.551734	53.94	PK-U	32.9	-44.78	0	42.06	-	-	74	-31.94	332	335	H
			* 3.552738	42.14	ADR	32.9	-44.79	0	30.25	54	-23.75	-	-	332	335	H
			* 2.755869	56.77	PK-U	32.2	-46.16	0	42.81	-	-	74	-31.19	137	230	V
			* 2.753973	45.38	ADR	32.2	-46.13	0	31.45	54	-22.55	-	-	137	230	V
			* 3.543797	55.29	PK-U	32.9	-44.72	0	43.47	-	-	74	-30.53	95	219	V
			* 3.546062	43.54	ADR	32.9	-44.72	0	31.72	54	-22.28	-	-	95	219	V
			* 11.92143	52.85	PK-U	38.6	-40.13	0	51.32	-	-	74	-22.68	133	160	H
			* 11.922274	40.98	ADR	38.6	-40.15	0	39.43	54	-14.57	-	-	133	160	H
			* 11.922458	53.11	PK-U	38.6	-40.15	0	51.56	-	-	74	-22.44	175	177	V
			* 11.921245	41.14	ADR	38.6	-40.12	0	39.62	54	-14.38	-	-	175	177	V
	5785	6 + 5	1.85094	62.27	PK-U	30.3	-46.63	0	45.94	-	-	68.2	-22.26	120	400	V
			1.858573	58.32	PK-U	30.3	-46.52	0	42.1	-	-	68.2	-26.1	73	207	H
			3.183012	55.53	PK-U	32.9	-44.92	0	43.51	-	-	68.2	-24.69	345	240	V
			3.194301	55.68	PK-U	32.9	-44.96	0	43.62	-	-	68.2	-24.58	221	297	H
			10.312462	52.35	PK-U	37.8	-40.64	0	49.51	-	-	68.2	-18.69	295	390	V
			10.323185	52.33	PK-U	37.8	-40.78	0	49.35	-	-	68.2	-18.85	58	256	H
	5825	6 + 5	* 2.369799	56.14	PK-U	32	-46.75	0	41.39	-	-	74	-32.61	360	100	H
			* 2.369846	44.66	ADR	32	-46.75	0	29.91	54	-24.09	-	-	360	100	H
			* 2.834989	56.95	PK-U	32.2	-46.08	0	43.07	-	-	74	-30.93	316	184	H
			* 2.833341	44.99	ADR	32.2	-46.08	0	31.11	54	-22.89	-	-	316	184	H
			* 3.903349	55.59	PK-U	33.4	-44.93	0	44.06	-	-	74	-29.94	241	200	V
			* 3.902365	43.88	ADR	33.4	-44.93	0	32.35	54	-21.65	-	-	241	200	V
			* 3.903729	55.3	PK-U	33.4	-44.93	0	43.77	-	-	74	-30.23	301	291	V
			* 3.905312	43.77	ADR	33.4	-44.95	0	32.22	54	-21.78	-	-	301	291	V
			* 12.343254	52.82	PK-U	38.8	-40.58	0	51.04	-	-	74	-22.96	81	146	H
			* 12.344229	40.61	ADR	38.8	-40.59	0	38.82	54	-15.18	-	-	81	146	H
			* 15.800397	52.8	PK-U	41.2	-39.05	0	54.95	-	-	74	-19.05	157	160	V
			* 15.797423	41.16	ADR	41.2	-38.89	0	43.47	54	-10.53	-	-	157	160	V
			2.15587	57.72	PK-U	31.5	-46.64	0	42.58	-	-	68.2	-25.62	316	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5755	6 + 5	1.733836	56.26	PK-U	29.3	-46.48	0	39.08	-	-	68.2	-29.12	109	255	H
			1.733955	57.33	PK-U	29.3	-46.48	0	40.15	-	-	68.2	-28.05	17	279	V
			3.043957	55.96	PK-U	33	-45.41	0	43.55	-	-	68.2	-24.65	291	323	V
			3.048848	56.18	PK-U	33	-45.43	0	43.75	-	-	68.2	-24.45	131	253	H
			8.71335	52.6	PK-U	35.8	-40.43	0	47.97	-	-	68.2	-20.23	350	168	V
	5795	6 + 5	8.713761	51.78	PK-U	35.8	-40.41	0	47.17	-	-	68.2	-21.03	112	363	H
			* 2.71922	56.66	PK-U	32.1	-46.4	0	42.36	-	-	74	-31.64	139	389	H
			* 2.718193	44.76	ADR	32.1	-46.42	0	30.44	54	-23.56	-	-	139	389	H
			* 4.859608	56.41	PK-U	34.3	-45.02	0	45.69	-	-	74	-28.31	26	195	H
			* 4.858743	44.35	ADR	34.3	-45.03	0	33.62	54	-20.38	-	-	26	195	H
			* 2.718696	57.1	PK-U	32.1	-46.41	0	42.79	-	-	74	-31.21	337	347	V
			* 2.719176	45.22	ADR	32.1	-46.4	0	30.92	54	-23.08	-	-	337	347	V
			* 4.861509	55.82	PK-U	34.3	-44.98	0	45.14	-	-	74	-28.86	270	243	V
			* 4.863457	44.49	ADR	34.3	-44.98	0	33.81	54	-20.19	-	-	270	243	V
			* 8.283738	52.21	PK-U	35.7	-40.4	0	47.51	-	-	74	-26.49	165	312	H
			* 8.282311	40.6	ADR	35.7	-40.42	0	35.88	54	-18.12	-	-	165	312	H
			* 8.28226	52.18	PK-U	35.7	-40.42	0	47.46	-	-	74	-26.54	64	395	V
			* 8.283419	40.56	ADR	35.7	-40.4	0	35.86	54	-18.14	-	-	64	395	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

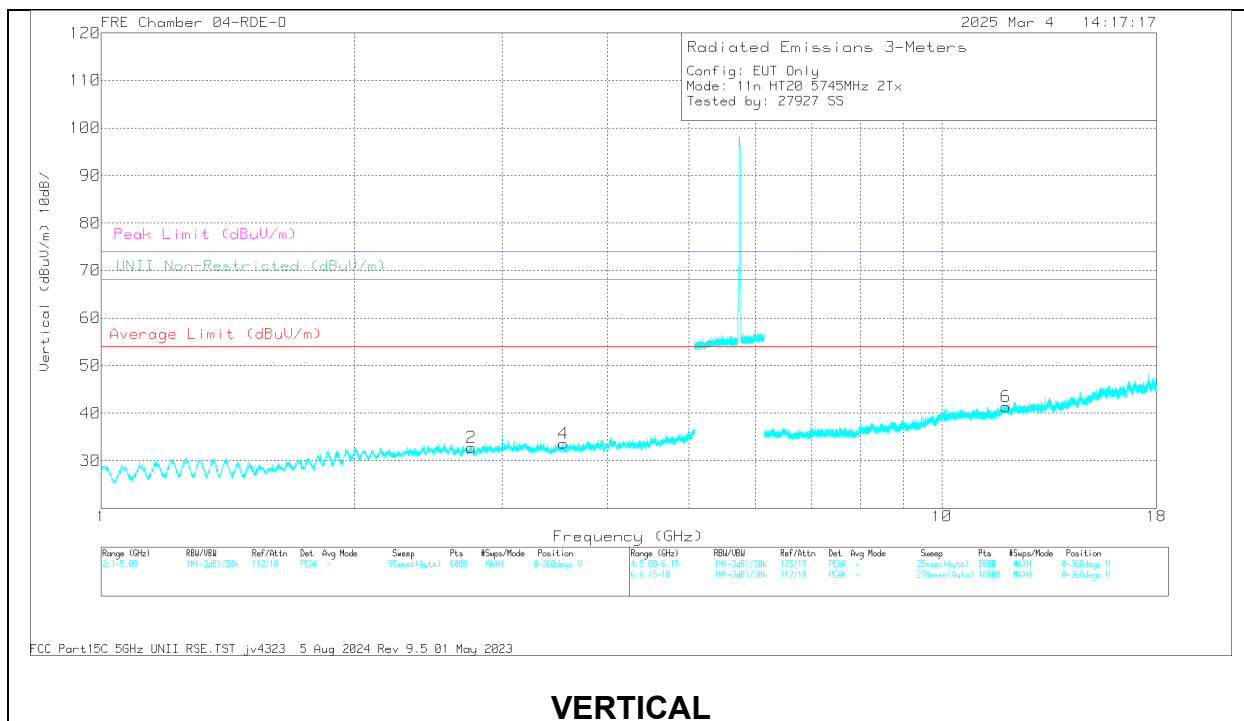
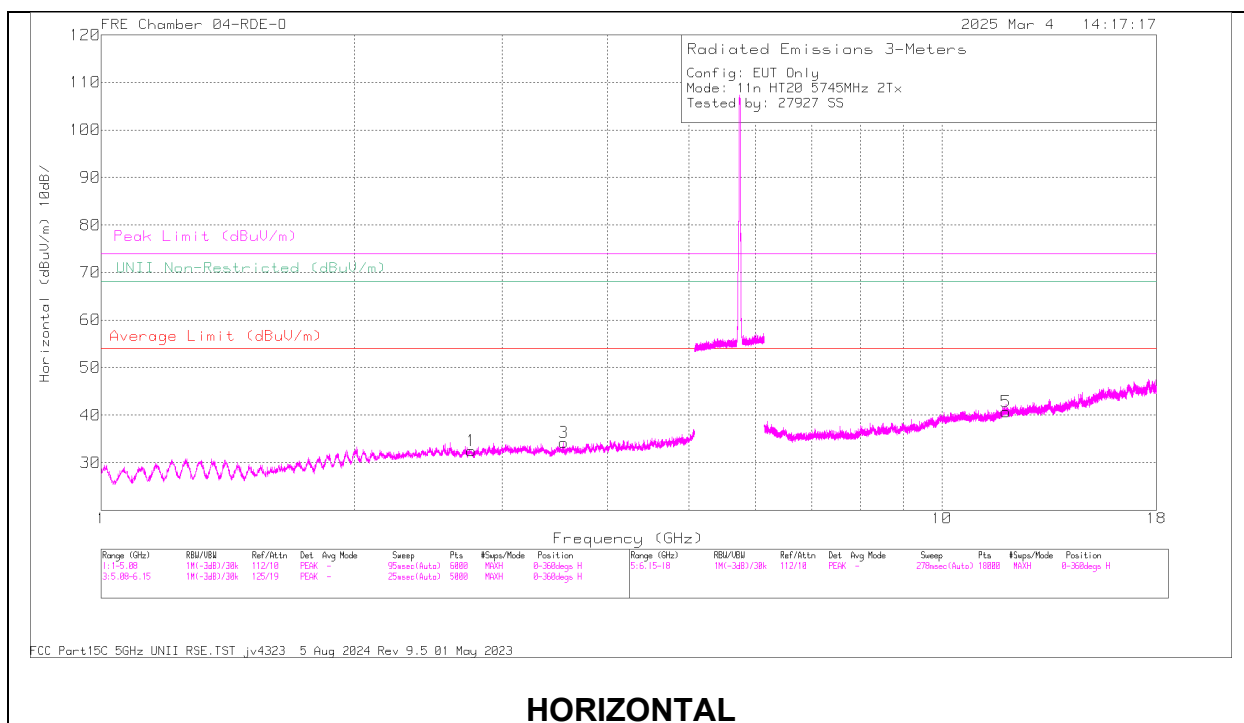
80MHz

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5775	6 + 5	* 1.183903	62.11	PK-U	28.1	-49.9	0	40.31	-	-	74	-33.69	0	200	H
			* 1.183202	50.32	ADR	28.1	-49.9	0	28.52	54	-25.48	-	-	0	200	H
			* 1.126773	62.4	PK-U	27.9	-49.8	0	40.5	-	-	74	-33.5	0	199	V
			* 1.126599	50.11	ADR	27.9	-49.8	0	28.21	54	-25.79	-	-	0	199	V
			* 11.591183	54.61	PK-U	38.3	-43.9	0	49.01	-	-	74	-24.99	0	200	V
			* 11.589685	42.77	ADR	38.3	-43.9	0	37.17	54	-16.83	-	-	0	200	V
			2.406592	60.65	PK-U	32.2	-49.44	0	43.41	-	-	68.2	-24.79	0	199	V
			2.519291	59.89	PK-U	32.2	-49.33	0	42.76	-	-	68.2	-25.44	0	101	H
			10.479344	55.97	PK-U	37.6	-45.1	0	48.47	-	-	68.2	-19.73	0	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5745MHz)

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 80402 (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.755715	56.37	PK-U	32.2	0	-46.16	42.41	-	-	74	-31.59	226	309	H
1	* 2.753929	44.39	ADR	32.2	0	-46.13	30.46	54	-23.54	-	-	226	309	H
3	* 3.551734	53.94	PK-U	32.9	0	-44.78	42.06	-	-	74	-31.94	332	335	H
3	* 3.552738	42.14	ADR	32.9	0	-44.79	30.25	54	-23.75	-	-	332	335	H
2	* 2.755869	56.77	PK-U	32.2	0	-46.16	42.81	-	-	74	-31.19	137	230	V
2	* 2.753973	45.38	ADR	32.2	0	-46.13	31.45	54	-22.55	-	-	137	230	V
4	* 3.543797	55.29	PK-U	32.9	0	-44.72	43.47	-	-	74	-30.53	95	219	V
4	* 3.546062	43.54	ADR	32.9	0	-44.72	31.72	54	-22.28	-	-	95	219	V
5	* 11.92143	52.85	PK-U	38.6	0	-40.13	51.32	-	-	74	-22.68	133	160	H
5	* 11.922274	40.98	ADR	38.6	0	-40.15	39.43	54	-14.57	-	-	133	160	H
6	* 11.922458	53.11	PK-U	38.6	0	-40.15	51.56	-	-	74	-22.44	175	177	V
6	* 11.921245	41.14	ADR	38.6	0	-40.12	39.62	54	-14.38	-	-	175	177	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

10.1.32. 802.11be MIMO MODE IN UNII-3 BAND – SPURIOUS EMISSIONS

20MHz

UNII-2a (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Fltr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5745	6 + 5	* 1.324212	49.2	ADR	28.8	-48.9	0	29.1	54	-24.9	-	-	0	101	V
			* 1.326879	60.31	PK-U	28.7	-48.8	0	40.21	-	-	74	-33.79	0	101	V
			* 1.443918	48.75	ADR	28.2	-48.6	0	28.35	54	-25.65	-	-	0	200	H
			* 1.448691	60.25	PK-U	28.2	-48.5	0	39.95	-	-	74	-34.05	0	200	H
			* 8.302104	53.64	PK-U	35.9	-42.2	0	47.34	-	-	74	-26.66	0	200	V
			* 8.328851	41.93	ADR	35.9	-42.3	0	35.53	54	-18.47	-	-	0	200	V
			* 9.410619	53.93	PK-U	36.6	-41.9	0	48.63	-	-	74	-25.37	0	200	H
			* 9.422197	42.44	ADR	36.6	-41.8	0	37.24	54	-16.76	-	-	0	200	H
			12.720144	52.33	PK-U	38.9	-39.5	0	51.73	-	-	68.2	-16.47	0	101	H
			13.440876	52.48	PK-U	38.8	-39.4	0	51.88	-	-	68.2	-16.32	0	200	V
			* 1.321497	60.66	PK-U	29.3	-47.8	0	42.16	-	-	74	-31.84	209	116	H
			* 1.320239	49.36	ADR	29.3	-47.8	0	30.86	54	-23.14	-	-	209	116	H
	5785	6 + 5	* 1.322037	61.01	PK-U	29.3	-47.8	0	42.51	-	-	74	-31.49	3	333	V
			* 1.321955	49.2	ADR	29.3	-47.8	0	30.7	54	-23.3	-	-	3	333	V
			* 8.129675	55.82	PK-U	35.8	-43.9	0	47.72	-	-	74	-26.28	57	250	H
			* 8.12877	44.24	ADR	35.8	-43.88	0	36.16	54	-17.84	-	-	57	250	H
			* 8.143748	56.2	PK-U	35.8	-44	0	48	-	-	74	-26	269	272	V
			* 8.145737	44.61	ADR	35.8	-44	0	36.41	54	-17.59	-	-	269	272	V
			13.029281	58.34	PK-U	39.3	-44.8	0	52.84	-	-	68.2	-15.36	297	180	H
			13.042927	58.26	PK-U	39.3	-44.79	0	52.77	-	-	68.2	-15.43	37	146	V
			* 1.32631	61.26	PK-U	29.3	-47.8	0	42.76	-	-	74	-31.24	13	220	H
			* 1.323976	49.28	ADR	29.3	-47.8	0	30.78	54	-23.22	-	-	13	220	H
			* 1.332835	59.58	PK-U	29.3	-47.78	0	41.1	-	-	74	-32.9	275	169	V
			* 1.333503	48.1	ADR	29.3	-47.75	0	29.65	54	-24.35	-	-	275	169	V
	5825	6 + 5	* 8.122429	55.65	PK-U	35.8	-43.8	0	47.65	-	-	74	-26.35	277	263	H
			* 8.123548	43.77	ADR	35.8	-43.8	0	35.77	54	-18.23	-	-	277	263	H
			* 11.966203	56.19	PK-U	38.8	-42.5	0	52.49	-	-	74	-21.51	10	159	H
			* 11.967196	44.22	ADR	38.8	-42.52	0	40.5	54	-13.5	-	-	10	159	H
			* 8.114728	55.17	PK-U	35.8	-43.83	0	47.14	-	-	74	-26.86	305	255	V
			* 8.113381	43.1	ADR	35.8	-43.84	0	35.06	54	-18.94	-	-	305	255	V
			* 11.971035	55.43	PK-U	38.8	-42.6	0	51.63	-	-	74	-22.37	163	307	V
			* 11.970605	43.56	ADR	38.8	-42.56	0	39.8	54	-14.2	-	-	163	307	V
			* 1.187551	59.67	PK-U	28.2	-47.78	0	40.09	-	-	74	-33.91	92	132	H
			* 1.184715	47.87	ADR	28.2	-47.82	0	28.25	54	-25.75	-	-	92	132	H
			* 1.185581	59.76	PK-U	28.2	-47.82	0	40.14	-	-	74	-33.86	110	143	V
			* 1.186353	47.76	ADR	28.2	-47.8	0	28.16	54	-25.84	-	-	110	143	V
11be (Partial RU 26 / Highest PSD)	5745	6 + 5	* 2.679925	57.92	PK-U	32.2	-47.31	0	42.81	-	-	74	-31.19	6	326	H
			* 2.678309	46.64	ADR	32.3	-47.34	0	31.6	54	-22.4	-	-	6	326	H
			* 2.681433	58.31	PK-U	32.2	-47.33	0	43.18	-	-	74	-30.82	51	242	V
			* 2.679213	46.68	ADR	32.3	-47.32	0	31.66	54	-22.34	-	-	51	242	V
			* 11.457899	55.37	PK-U	38.2	-43.93	0	49.64	-	-	74	-24.36	188	122	H
			* 11.456872	43.74	ADR	38.2	-43.89	0	38.05	54	-15.95	-	-	188	122	H
			* 11.463002	55.16	PK-U	38.2	-43.86	0	49.5	-	-	74	-24.5	231	193	V
			* 11.461771	43.73	ADR	38.2	-43.94	0	37.99	54	-16.01	-	-	231	193	V
			2.974355	57.28	PK-U	32.7	-46.81	0	43.17	-	-	68.2	-25.03	307	373	H
			2.974802	57.17	PK-U	32.7	-46.8	0	43.07	-	-	68.2	-25.13	339	289	V
			* 7.343412	55.11	PK-U	35.6	-44.16	0	46.55	-	-	74	-27.45	90	297	H
			* 7.346015	43.74	ADR	35.6	-44.24	0	35.1	54	-18.9	-	-	90	297	H
	5785	6 + 5	* 7.346417	55.56	PK-U	35.6	-44.24	0	46.92	-	-	74	-27.08	115	302	V
			* 7.346993	43.93	ADR	35.6	-44.24	0	35.29	54	-18.71	-	-	115	302	V
			* 11.559268	55.2	PK-U	38.4	-43.54	0	50.06	-	-	74	-23.94	127	369	H
			* 11.558061	43.66	ADR	38.3	-43.61	0	38.35	54	-15.65	-	-	127	369	H
			* 11.557465	55.58	PK-U	38.3	-43.52	0	50.36	-	-	74	-23.64	94	348	V
			* 11.558484	43.69	ADR	38.3	-43.58	0	38.41	54	-15.59	-	-	94	348	V
			2.054584	59.09	PK-U	31.5	-48.16	0	42.43	-	-	68.2	-25.77	334	222	H
			2.050316	59.25	PK-U	31.5	-48.11	0	42.64	-	-	68.2	-25.56	305	251	V
	5825	6 + 5	* 7.346778	55.5	PK-U	35.6	-44.24	0	46.86	-	-	74	-27.14	358	185	H
			* 7.34735	43.75	ADR	35.6	-44.24	0	35.11	54	-18.89	-	-	358	185	H
			* 7.344126	55.84	PK-U	35.6	-44.16	0	47.28	-	-	74	-26.72	297	208	V
			* 7.343887	43.75	ADR	35.6	-44.15	0	35.2	54	-18.8	-	-	297	208	V
			* 11.671484	54.78	PK-U	38.7	-43.48	0	50	-	-	74	-24	244	344	H
			* 11.6696	43.2	ADR	38.7	-43.57	0	38.33	54	-15.67	-	-	244	344	H
			* 11.650154	54.71	PK-U	38.6	-43.55	0	49.76	-	-	74	-24.24	323	272	V
			* 11.650361	43.51	ADR	38.6	-43.54	0	38.57	54	-15.43	-	-	323	272	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-3	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5755	6 + 5	* 2.87805	57.42	PK-U	32.1	0	-47.4	42.12	-	-	74	-31.88	260	318	H
			* 2.878506	45.87	ADR	32.1	0	-47.35	30.62	54	-23.38	-	-	260	318	H
			* 2.874654	57.61	PK-U	32.1	0	-47.3	42.41	-	-	74	-31.59	23	193	V
			* 2.873821	45.73	ADR	32.1	0	-47.3	30.53	54	-23.47	-	-	23	193	V
			* 11.557634	55.37	PK-U	38.4	0	-42.9	50.87	-	-	74	-23.13	308	354	H
			* 11.5588	44.04	ADR	38.4	0	-42.9	39.54	54	-14.46	-	-	308	354	H
			* 11.546266	55.78	PK-U	38.3	0	-42.9	51.18	-	-	74	-22.82	289	275	V
			* 11.546569	44.17	ADR	38.3	0	-42.9	39.57	54	-14.43	-	-	289	275	V
			17.323423	58.89	PK-U	41.3	0	-42.7	57.49	-	-	68.2	-10.71	238	301	H
	5795	6 + 5	17.324692	58.74	PK-U	41.3	0	-42.77	57.27	-	-	68.2	-10.93	217	390	V
			* 4.564184	58.6	PK-U	34.1	0	-47.82	44.88	-	-	74	-29.12	2	200	H
			* 4.560672	46.46	ADR	34.1	0	-47.8	32.76	54	-21.24	-	-	2	200	H
			* 1.236342	61.61	PK-U	28.5	0	-49.7	40.41	-	-	74	-33.59	2	200	V
			* 1.237799	50.5	ADR	28.5	0	-49.78	29.22	54	-24.78	-	-	2	200	V
			1.954098	61.46	PK-U	31.1	0	-49.31	43.25	-	-	68.2	-24.95	2	101	H
			4.401336	58.46	PK-U	33.8	0	-47.6	44.66	-	-	68.2	-23.54	2	200	V
			10.472036	56.36	PK-U	37.6	0	-45.5	48.46	-	-	68.2	-19.74	2	200	H
			16.534672	54.91	PK-U	41.4	0	-42.03	54.28	-	-	68.2	-13.92	2	200	V
11be (Partial RU 106 / Highest PSD)	5755 (Mid Index)	6 + 5	* 3.632505	56.53	PK-U	33.2	0	-46.39	43.34	-	-	74	-30.66	150	134	H
			* 3.631328	45.04	ADR	33.2	0	-46.43	31.81	54	-22.19	-	-	150	134	H
			* 3.629301	57.03	PK-U	33.2	0	-46.39	43.84	-	-	74	-30.16	282	198	V
			* 3.628805	45.06	ADR	33.2	0	-46.39	31.87	54	-22.13	-	-	282	198	V
			* 7.417774	55.41	PK-U	35.6	0	-44.48	46.53	-	-	74	-27.47	335	247	H
			* 7.416497	43.72	ADR	35.6	0	-44.44	34.88	54	-19.12	-	-	335	247	H
			* 7.410339	54.74	PK-U	35.6	0	-44.59	45.75	-	-	74	-28.25	304	151	V
			* 7.412423	43.57	ADR	35.6	0	-44.54	34.63	54	-19.37	-	-	304	151	V
			* 11.500893	55.67	PK-U	38.3	0	-43.61	50.36	-	-	74	-23.64	162	203	H
			* 11.499333	43.51	ADR	38.3	0	-43.54	38.27	54	-15.73	-	-	162	203	H
			* 11.501284	55.24	PK-U	38.3	0	-43.6	49.94	-	-	74	-24.06	137	230	V
			* 11.502765	43.83	ADR	38.3	0	-43.6	38.53	54	-15.47	-	-	137	230	V
	5795 (Mid Index)	6 + 5	* 2.244665	59.62	PK-U	31.9	0	-48.25	43.27	-	-	74	-30.73	274	146	H
			* 2.245214	47.6	ADR	31.9	0	-48.26	31.24	54	-22.76	-	-	274	146	H
			* 2.241112	59.21	PK-U	31.9	0	-48.3	42.81	-	-	74	-31.19	279	203	V
			* 2.240921	47.34	ADR	31.9	0	-48.3	30.94	54	-23.06	-	-	279	203	V
			* 8.310235	54.59	PK-U	36	0	-44.51	46.08	-	-	74	-27.92	324	141	H
			* 8.308279	43.2	ADR	36	0	-44.54	34.66	54	-19.34	-	-	324	141	H
			* 8.308263	54.86	PK-U	36	0	-44.54	46.32	-	-	74	-27.68	225	213	V
			* 8.30733	43.53	ADR	36	0	-44.54	34.99	54	-19.01	-	-	225	213	V
			* 11.499918	55.95	PK-U	38.3	0	-43.57	50.68	-	-	74	-23.32	321	240	H
			* 11.498484	43.81	ADR	38.3	0	-43.51	38.6	54	-15.4	-	-	321	240	H
			* 11.501408	55.68	PK-U	38.3	0	-43.6	50.38	-	-	74	-23.62	45	353	V
			* 11.503801	44.03	ADR	38.3	0	-43.55	38.78	54	-15.22	-	-	45	353	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

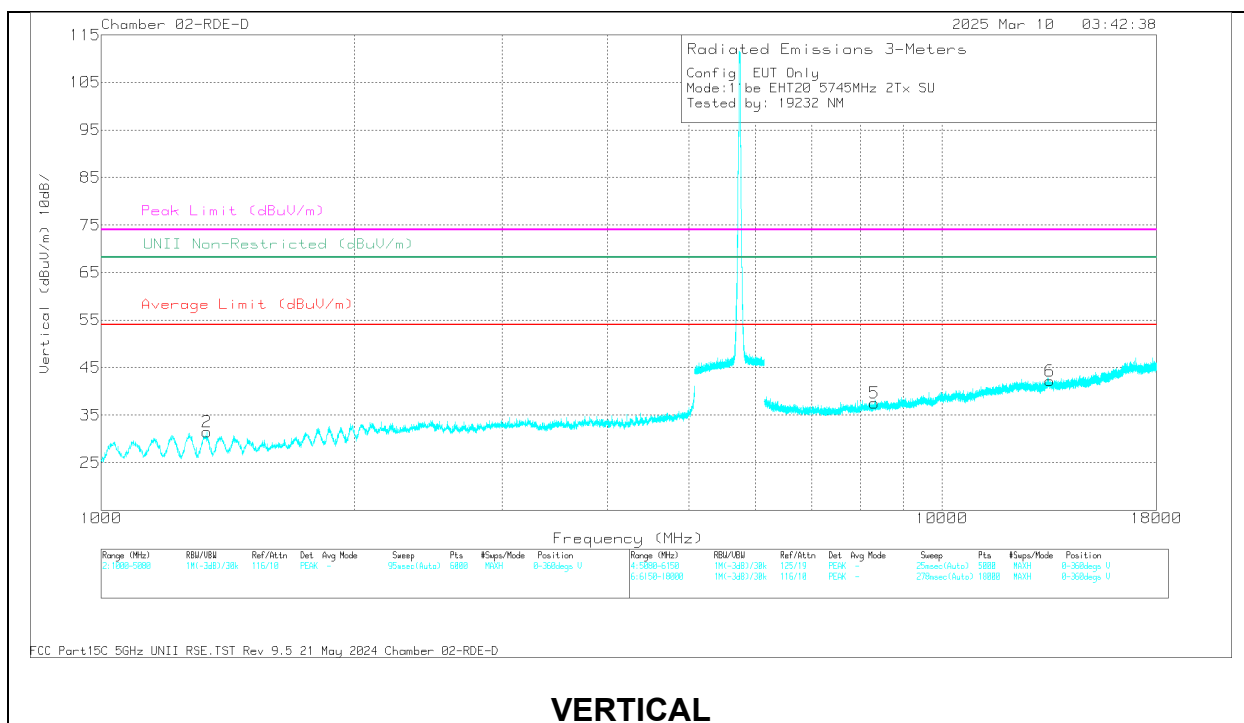
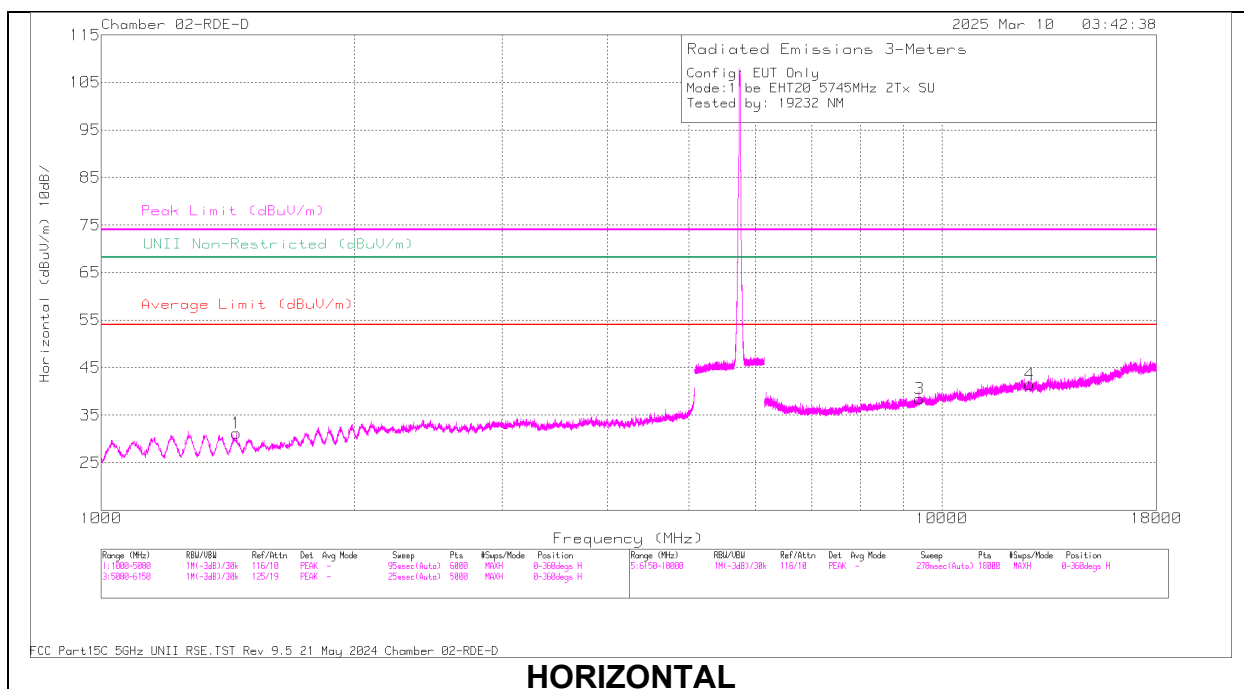
80MHz

UNII-3	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5775	6 + 5	* 2.844946	59.71	PK-U	32.5	0	-48.7	43.51	-	-	74	-30.49	6	121	H
			* 2.846075	47.74	ADR	32.5	0	-48.79	31.45	54	-22.55	-	-	6	121	H
			* 2.841953	59.49	PK-U	32.5	0	-48.8	43.19	-	-	74	-30.81	4	342	V
			* 2.842667	47.91	ADR	32.5	0	-48.73	31.68	54	-22.32	-	-	4	342	V
			* 11.550464	54.97	PK-U	38.2	0	-43.75	49.42	-	-	74	-24.58	307	387	H
			* 11.550687	42.84	ADR	38.2	0	-43.73	37.31	54	-16.69	-	-	307	387	H
			* 11.551506	54.69	PK-U	38.2	0	-43.8	49.09	-	-	74	-24.91	315	390	V
			* 11.554224	42.77	ADR	38.2	0	-43.82	37.15	54	-16.85	-	-	315	390	V
			17.323613	54.16	PK-U	41.7	0	-41.3	54.56	-	-	68.2	-13.64	168	238	V
			17.323677	54.42	PK-U	41.7	0	-41.3	54.82	-	-	68.2	-13.38	344	282	H
			* 1.555547	59.16	PK-U	27.6	0	-47.91	38.85	-	-	74	-35.15	300	399	H
			* 1.554108	47.42	ADR	27.6	0	-47.87	27.15	54	-26.85	-	-	300	399	H
11be (Partial RU 484 / Highest PSD)	5775 (Low Index)	6 + 5	* 1.555366	59.1	PK-U	27.6	0	-47.9	38.8	-	-	74	-35.2	288	173	V
			* 1.558167	47.17	ADR	27.6	0	-47.91	26.86	54	-27.14	-	-	288	173	V
			* 2.795627	58.01	PK-U	32.3	0	-47.27	43.04	-	-	74	-30.96	342	361	H
			* 2.792933	46.58	ADR	32.3	0	-47.32	31.56	54	-22.44	-	-	342	361	H
			* 2.78799	58.19	PK-U	32.4	0	-47.43	43.16	-	-	74	-30.84	193	242	V
			* 2.786511	46.77	ADR	32.4	0	-47.42	31.75	54	-22.25	-	-	193	242	V
			* 11.527125	55.4	PK-U	38.3	0	-43.51	50.19	-	-	74	-23.81	324	198	H
			* 11.527552	43.57	ADR	38.3	0	-43.52	38.35	54	-15.65	-	-	324	198	H
			* 11.515152	55.07	PK-U	38.3	0	-43.67	49.7	-	-	74	-24.3	151	271	V
			* 11.515715	43.6	ADR	38.3	0	-43.66	38.24	54	-15.76	-	-	151	271	V
			1.815186	59.75	PK-U	30.6	0	-48.31	42.04	-	-	68.2	-26.16	317	244	H
			1.811744	59.92	PK-U	30.6	0	-48.33	42.19	-	-	68.2	-26.01	260	275	V
11be (Partial RU 106 / Highest PSD)	5775 (High Index)	6 + 5	* 8.180524	54.84	PK-U	36	0	-44.06	46.78	-	-	74	-27.22	309	276	H
			* 8.181029	42.93	ADR	36	0	-44.07	34.86	54	-19.14	-	-	309	276	H
			* 8.183994	54.51	PK-U	36	0	-44.01	46.5	-	-	74	-27.5	299	248	V
			* 8.181726	42.86	ADR	36	0	-44.03	34.83	54	-19.17	-	-	299	248	V
			* 11.554055	55.34	PK-U	38.3	0	-43.49	50.15	-	-	74	-23.85	224	322	H
			* 11.555637	43.67	ADR	38.3	0	-43.45	38.52	54	-15.48	-	-	224	322	H
			* 11.559012	54.84	PK-U	38.4	0	-43.55	49.69	-	-	74	-24.31	80	292	V
			* 11.557999	43.35	ADR	38.3	0	-43.61	38.04	54	-15.96	-	-	80	292	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5745MHz)

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	200896 ACF(dB/m)	Amp/Cbl/Filtr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 1.324212	49.2	ADR	28.8	-48.9	0	29.1	54	-24.9	-	-	0	101	V
2	* 1.326879	60.31	PK-U	28.7	-48.8	0	40.21	-	-	74	-33.79	0	101	V
1	* 1.443918	48.75	ADR	28.2	-48.6	0	28.35	54	-25.65	-	-	0	200	H
1	* 1.448691	60.25	PK-U	28.2	-48.5	0	39.95	-	-	74	-34.05	0	200	H
5	* 8.302104	53.64	PK-U	35.9	-42.2	0	47.34	-	-	74	-26.66	0	200	V
5	* 8.328851	41.93	ADR	35.9	-42.3	0	35.53	54	-18.47	-	-	0	200	V
3	* 9.410619	53.93	PK-U	36.6	-41.9	0	48.63	-	-	74	-25.37	0	200	H
3	* 9.422197	42.44	ADR	36.6	-41.8	0	37.24	54	-16.76	-	-	0	200	H
4	12.720144	52.33	PK-U	38.9	-39.5	0	51.73	-	-	68.2	-16.47	0	101	H
6	13.440876	52.48	PK-U	38.8	-39.4	0	51.88	-	-	68.2	-16.32	0	200	V

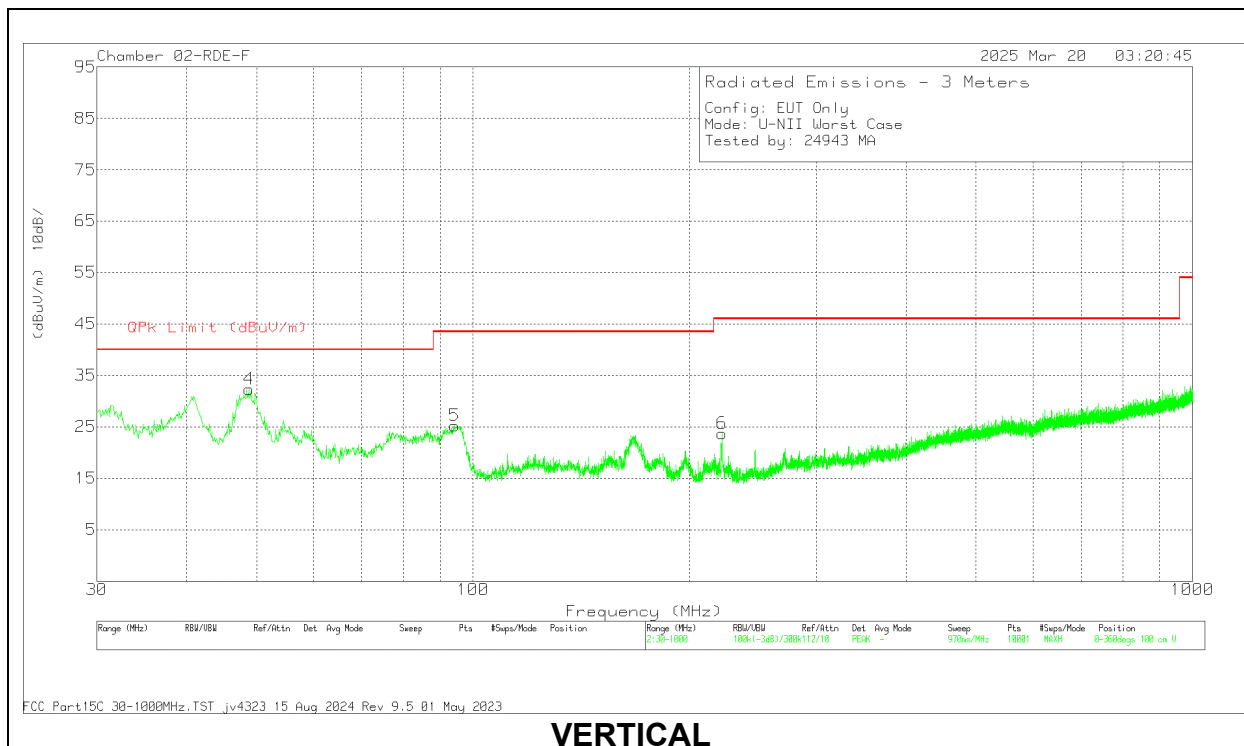
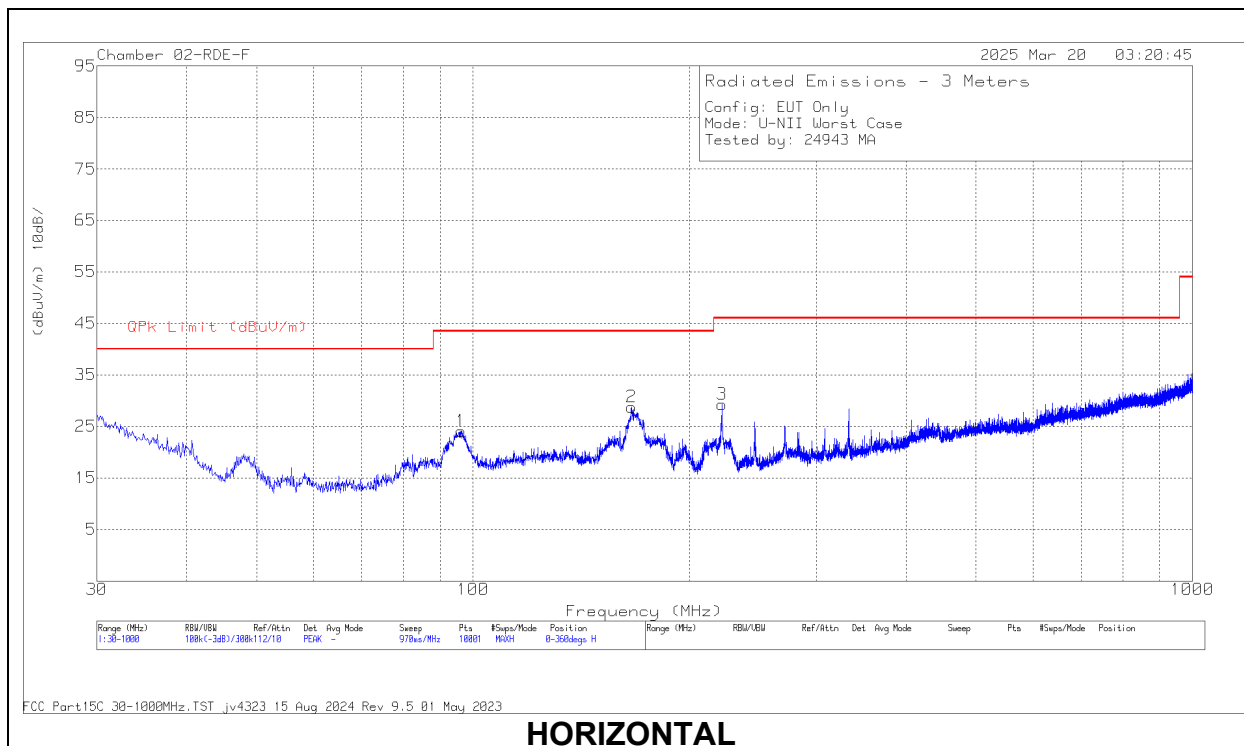
* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

10.2. WORST CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)



Below 1GHz Data

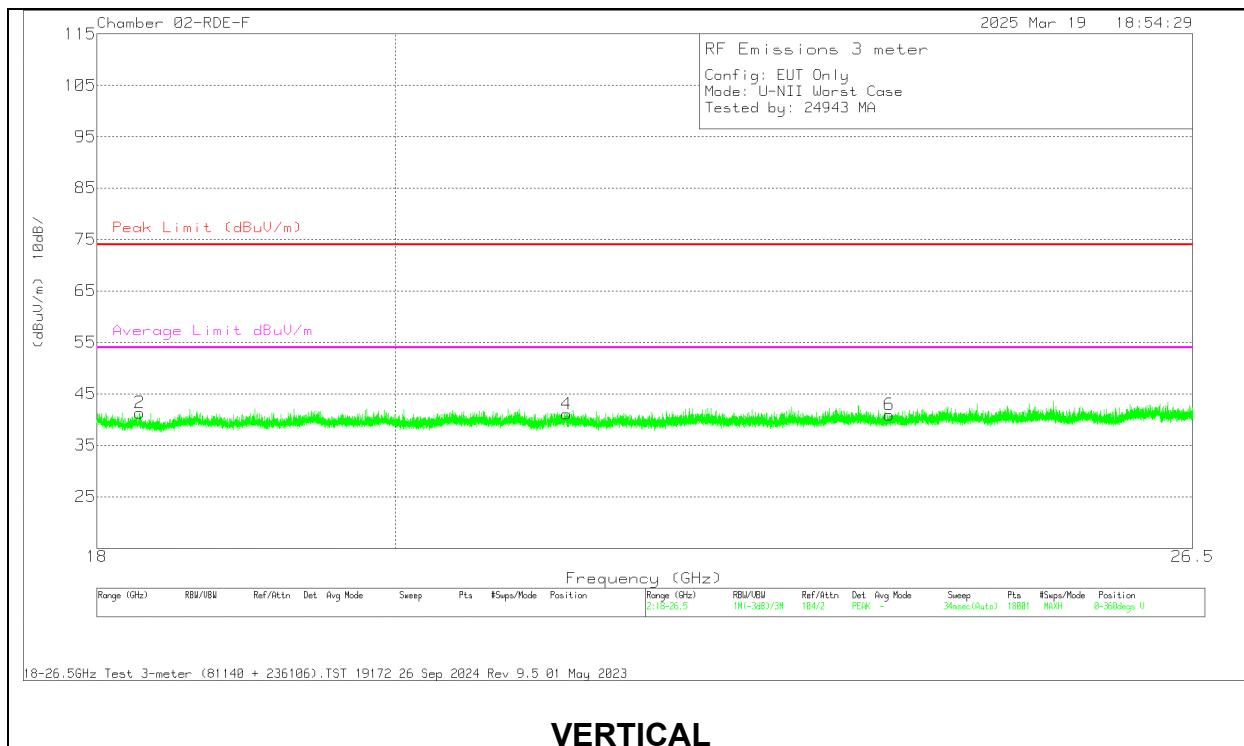
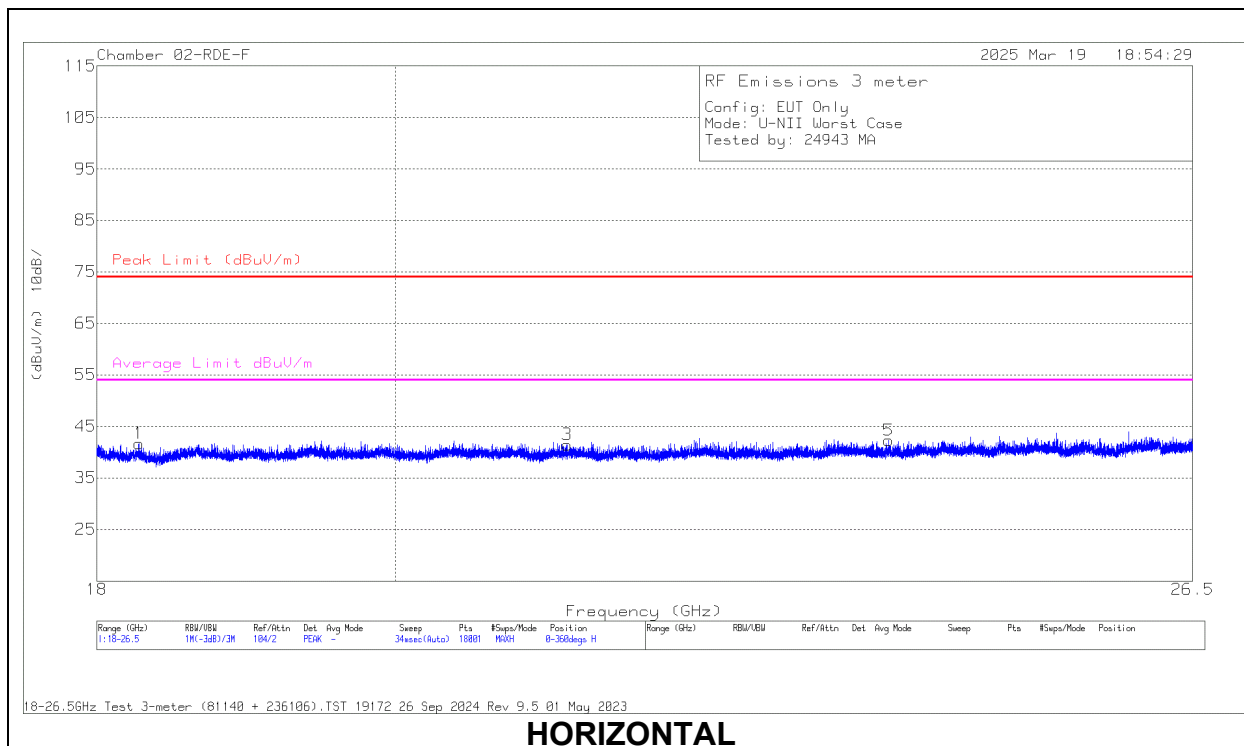
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	202301 ACF (dB/m)	CBL/AMP (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 166.447	36.54	Qp	17.8	-30.4	23.94	43.52	-19.58	7	172	H
4	48.498	45.37	Qp	14.1	-31.7	27.77	40	-12.23	99	103	V
5	91.6713	37.23	Qp	14	-30.9	20.33	43.52	-23.19	128	103	V
2	96.1001	36.87	Qp	15.2	-31.1	20.97	43.52	-22.55	241	299	H
3	221.795	41.58	Qp	16.6	-30.4	27.78	46.02	-18.24	347	136	H
6	221.816	33.86	Qp	16.6	-30.4	20.06	46.02	-25.96	289	285	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Qp - Quasi-Peak detector

10.3. WORST CASE 18-26 GHz

SPURIOUS EMISSIONS 18-26 GHz (WORST-CASE CONFIGURATION)



18 – 26GHz Data

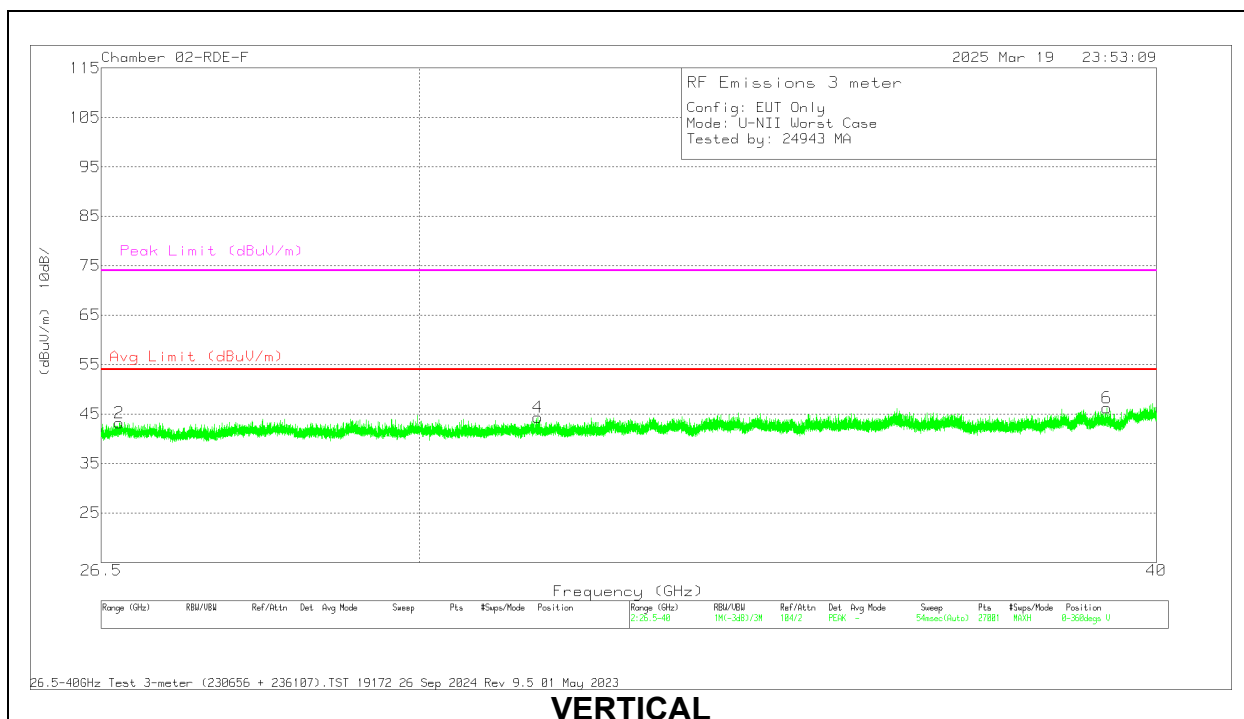
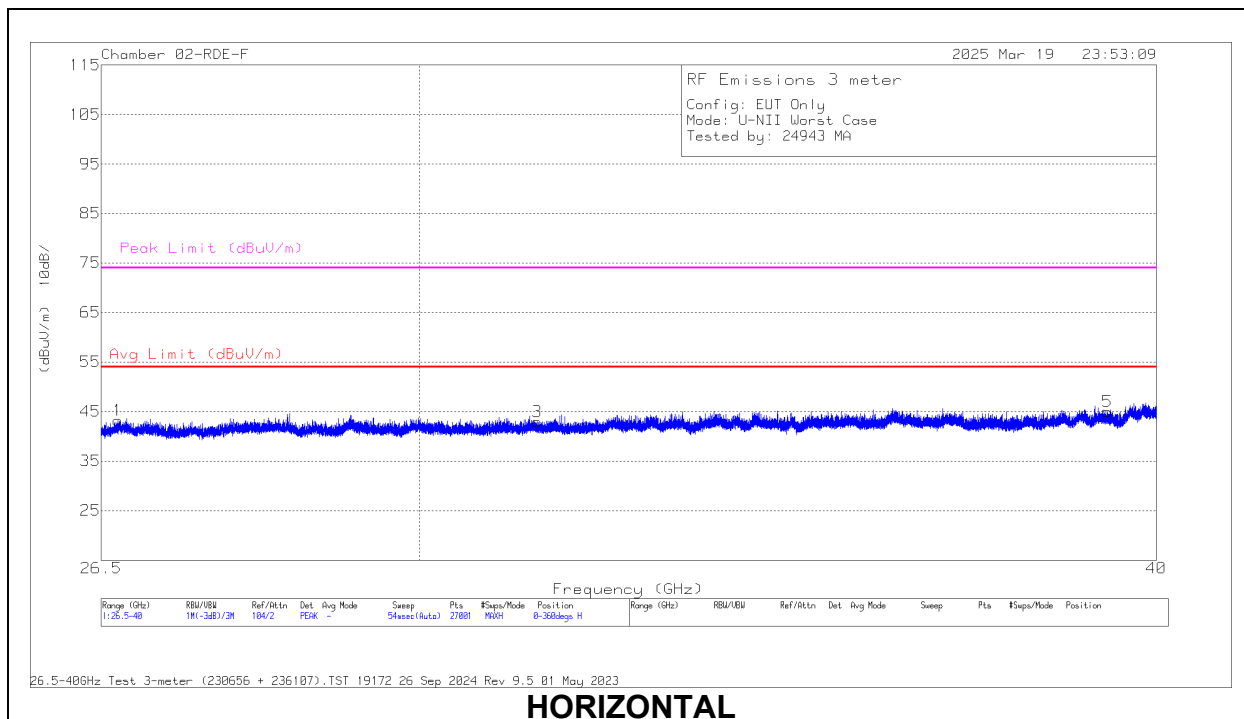
Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81140 ACF (dB/m)	AMP (dB)	CBL (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Average Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 18.26775	55.95	Pk	32.2	-63.8	17.3	0	41.65	74	-32.35	54	-12.35	0-360	200	H
3	* 21.251721	52.68	Pk	32.9	-62.6	18.5	0	41.48	74	-32.52	54	-12.52	0-360	200	H
5	* 23.802664	52.66	Pk	33.7	-63.8	19.7	0	42.26	74	-31.74	54	-11.74	0-360	101	H
2	* 18.273889	55.57	Pk	32.2	-63.8	17.3	0	41.27	74	-32.73	54	-12.73	0-360	101	V
4	* 21.244637	52.21	Pk	32.9	-62.5	18.5	0	41.11	74	-32.89	54	-12.89	0-360	200	V
6	* 23.811636	51.31	Pk	33.7	-63.8	19.7	0	40.91	74	-33.09	54	-13.09	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

10.4. WORST CASE 26-40 GHz

SPURIOUS EMISSIONS 26-40 GHz (WORST-CASE CONFIGURATION)



26 – 40GHz Data

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230656 ACF (dB/m)	AMP (dB)	CBL (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 31.418	46.01	Pk	36.4	-62.2	22.8	0	43.01	74	-30.99	54	-10.99	0-360	200	H
5	* 39.247	47.02	Pk	37.9	-66	26.1	0	45.02	74	-28.98	54	-8.98	0-360	200	H
4	* 31.425	47.2	Pk	36.4	-62.2	22.9	0	44.3	74	-29.7	54	-9.7	0-360	101	V
6	* 39.238	48.13	Pk	37.9	-65.9	26.1	0	46.23	74	-27.77	54	-7.77	0-360	200	V
1	26.674	51.66	Pk	35.7	-65.2	21	0	43.16	74	-30.84	54	-10.84	0-360	101	H
2	26.689	51.74	Pk	35.7	-65.2	21	0	43.24	74	-30.76	54	-10.76	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

11. AC POWERLINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

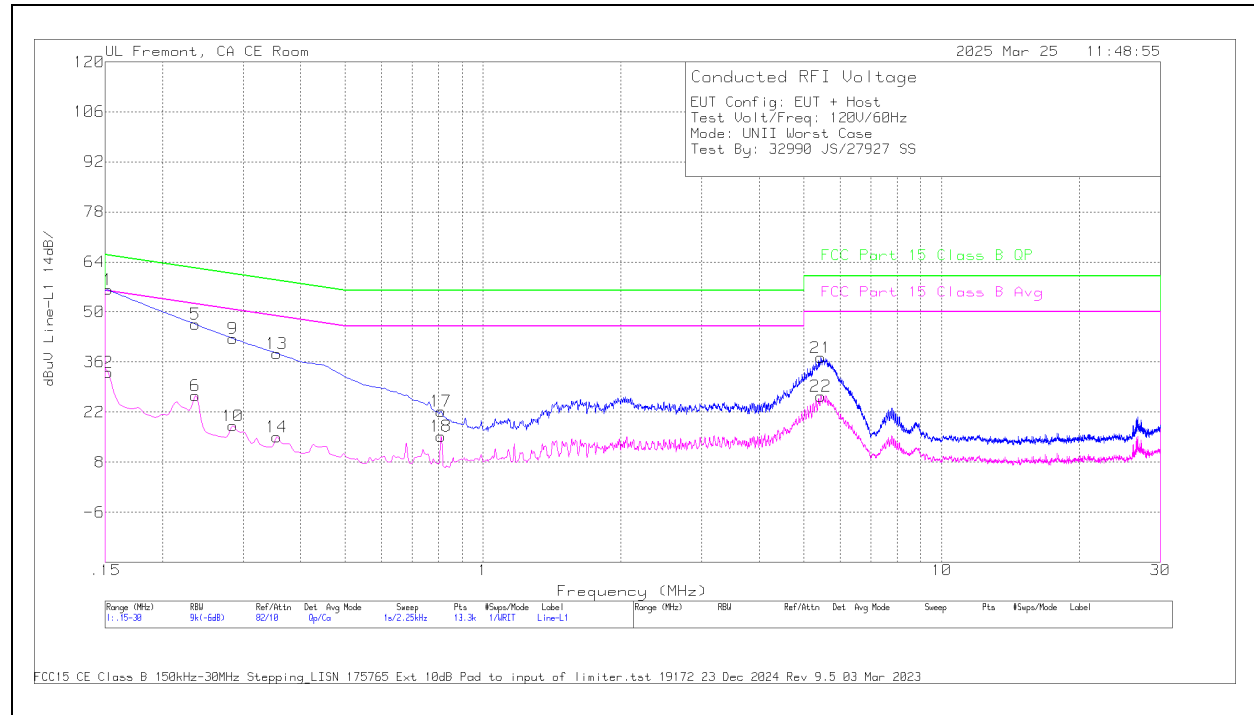
The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

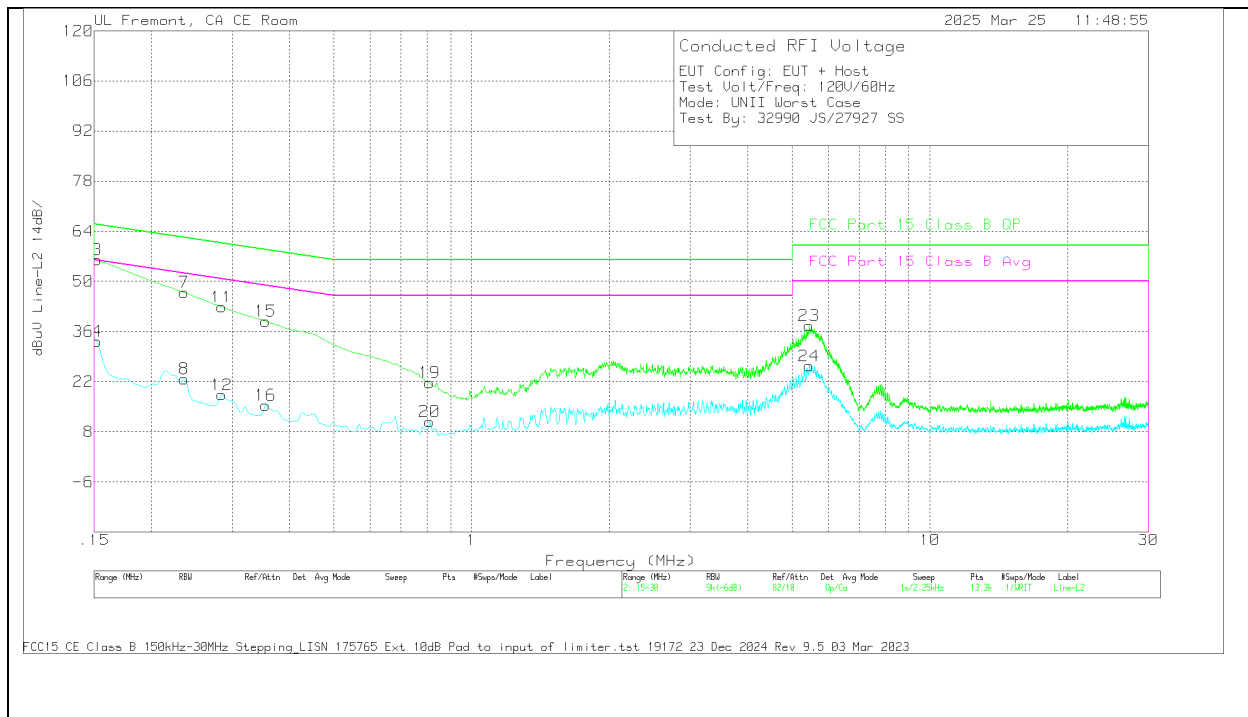
RESULTS

11.1. AC POWER LINE WITH LAPTOP

LINE 1 RESULTS



Qp - Quasi-Peak detector
Ca - CISPR average detection

LINE 2 RESULTS

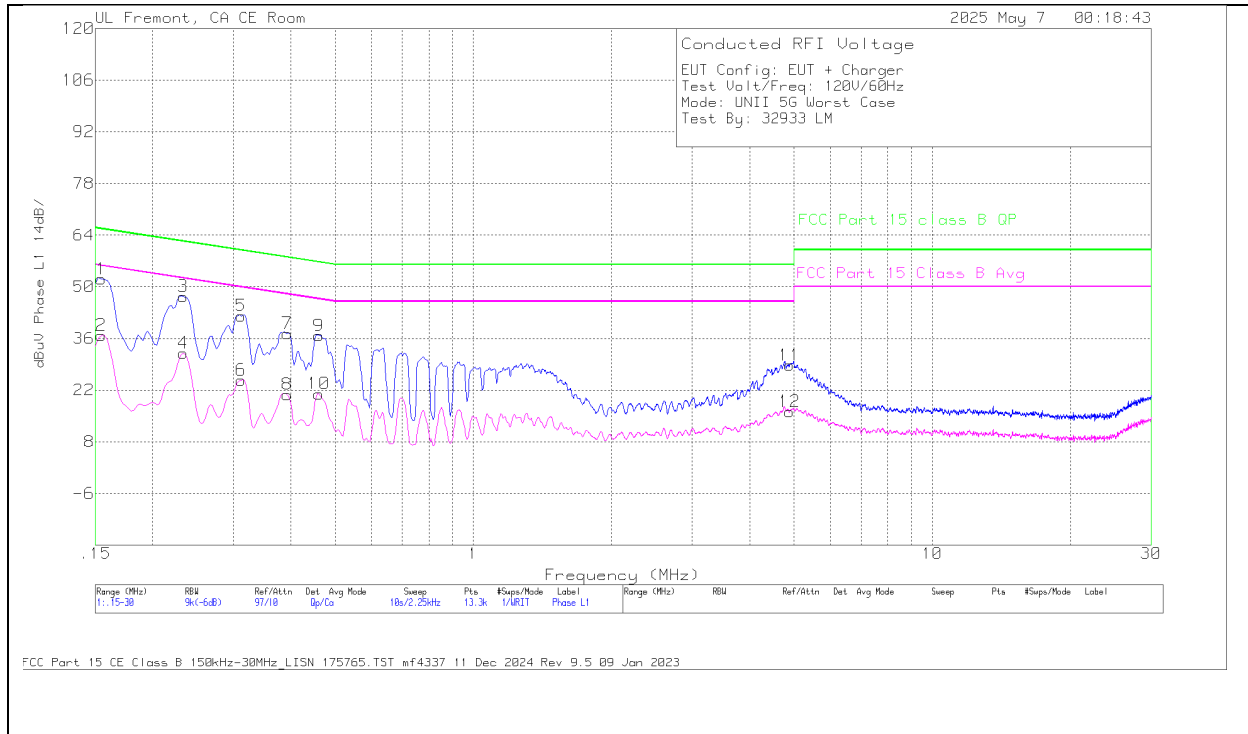
Range 2: Line-L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN (dB)	CBL(dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B QP dBuV	QP Margin (dB)	FCC Part 15 Class B Avg dBuV	Av(CISPR)Margin (dB)
4	.1523	14.32	Ca	.1	.3	8.5	10	33.22	-	-	55.88	-22.66
8	.2355	4.36	Ca	0	.1	8.3	10	22.76	-	-	52.25	-29.49
12	.285	.09	Ca	0	.1	8.1	10	18.29	-	-	50.67	-32.38
16	.3548	-2.98	Ca	0	-.1	8.4	10	15.32	-	-	48.85	-33.53
20	.8093	-7.08	Ca	0	0	7.9	10	10.82	-	-	46	-35.18
24	5.4533	7.55	Ca	0	.4	8.4	10	26.35	-	-	50	-23.65
3	.1523	37.18	Qp	.1	.3	8.5	10	56.08	65.88	-9.8	-	-
7	.2355	28.48	Qp	0	.1	8.3	10	46.88	62.25	-15.37	-	-
11	.285	24.62	Qp	0	.1	8.1	10	42.82	60.67	-17.85	-	-
15	.3548	20.56	Qp	0	-.1	8.4	10	38.86	58.85	-19.99	-	-
19	.8093	3.75	Qp	0	0	7.9	10	21.65	56	-34.35	-	-
23	5.4533	18.8	Qp	0	.4	8.4	10	37.6	60	-22.4	-	-

Qp - Quasi-Peak detector

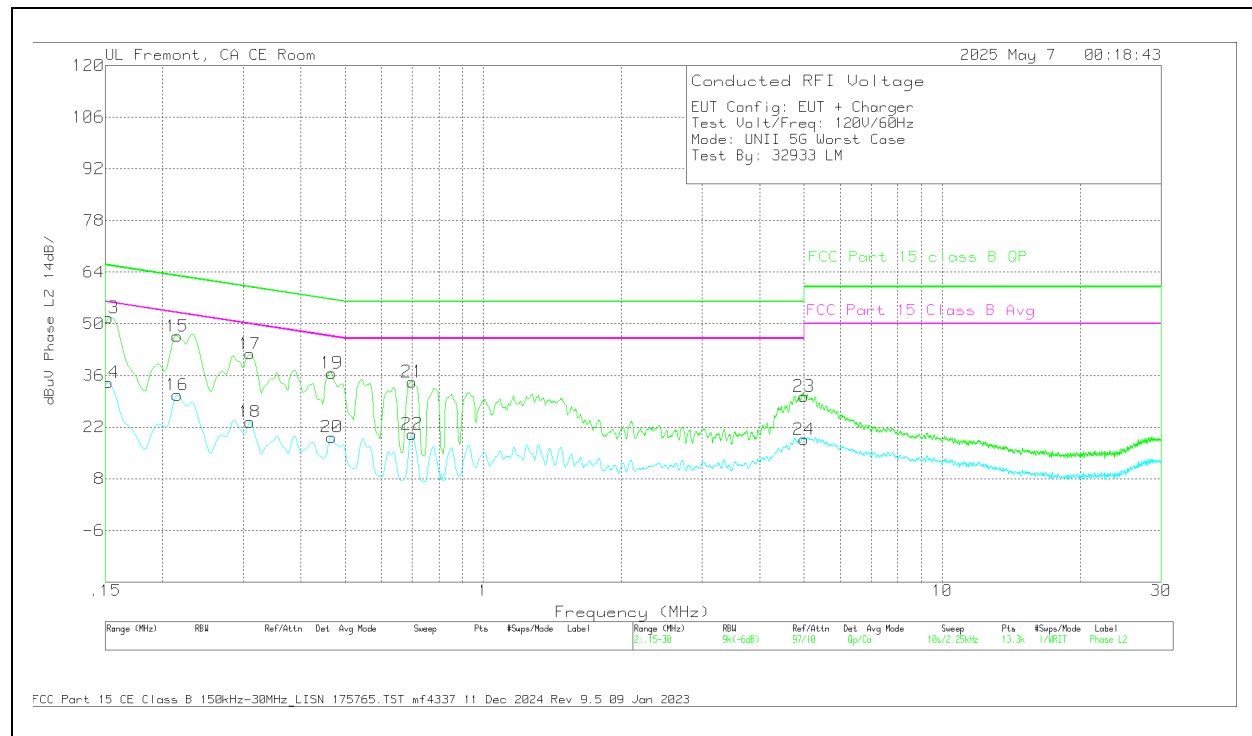
Ca - CISPR average detection

11.2. AC POWER LINE WITH AC/DC ADAPTER

LINE 1 RESULTS



Range 1: Phase L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg	Margin (dB)	FCC Part 15 class B QP	Margin (dB)
2	.1545	17.72	Ca	.5	.1	8.5	10	36.82	55.75	-18.93	-	-
4	.2333	13.72	Ca	0	0	8.3	10	32.02	52.33	-20.31	-	-
6	.312	6.7	Ca	-.1	0	8.1	10	24.7	49.92	-25.22	-	-
8	.393	3.02	Ca	-.5	0	8.3	10	20.82	48	-27.18	-	-
10	.4605	2.19	Ca	.1	0	8.7	10	20.99	46.68	-25.69	-	-
12	4.8863	-1.96	Ca	.1	0	8	10	16.14	46	-29.86	-	-
1	.1545	32.97	Qp	.5	.1	8.5	10	52.07	-	-	65.75	-13.68
3	.2333	29.07	Qp	0	0	8.3	10	47.37	-	-	62.33	-14.96
5	.312	24.13	Qp	-.1	0	8.1	10	42.13	-	-	59.92	-17.79
7	.393	19.53	Qp	-.5	0	8.3	10	37.33	-	-	58	-20.67
9	.4605	17.96	Qp	.1	0	8.7	10	36.76	-	-	56.68	-19.92
11	4.8851	10.62	Qp	.1	0	8	10	28.72	-	-	56	-27.28

LINE 2 RESULTS

Range 2: Phase L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg	Margin (dB)	FCC Part 15 class B QP	Margin (dB)
14	.1523	14.99	Ca	.5	.1	8.5	10	34.09	55.88	-21.79	-	-
16	.2153	12.42	Ca	0	0	8.3	10	30.72	53	-22.28	-	-
18	.3098	5.4	Ca	-.1	0	8.1	10	23.4	49.98	-26.58	-	-
20	.4673	.57	Ca	.1	0	8.6	10	19.27	46.56	-27.29	-	-
22	.699	1.7	Ca	.2	0	8.2	10	20.1	46	-25.9	-	-
24	4.9931	.35	Ca	0	0	8.3	10	18.65	46	-27.35	-	-
13	.1523	32.51	Qp	.5	.1	8.5	10	51.61	-	-	65.88	-14.27
15	.2153	28.35	Qp	0	0	8.3	10	46.65	-	-	63	-16.35
17	.3098	23.87	Qp	-.1	0	8.1	10	41.87	-	-	59.98	-18.11
19	.4673	17.94	Qp	.1	0	8.6	10	36.64	-	-	56.56	-19.92
21	.699	15.84	Qp	.2	0	8.2	10	34.24	-	-	56	-21.76
23	4.9943	12	Qp	0	0	8.3	10	30.3	-	-	56	-25.7

12. SETUP PHOTOS

Please refer to the setup report 15496282-EP1V1

13. APPENDIX A – SPOT CHECK EVALUATION

13.1. MODEL DIFFERENCES

The manufacturer hereby declares the following for models A3260, A3516, A3517 and A3518.

These models have the same PCB layout, design, common components, antennas, antenna locations and housing cases, except for the cellular bands that are enabled/disabled by software as shown below.

Model	FCC ID	IC ID	Feature Difference	Sim Support	Reference Model
A3260	BCG-E8948A	579C-E8948A	_No B11/21	eSIM	-
A3516	BCG-E8954A	579C-E8954A	_Added B11/21 _No B14/29/71		A3260
A3517	BCG-E8955A	579C-E8955A	_No B11/21/14/29/71		
A3518	BCG-E8956A	579C-E8956A	_No B11/21/14/29/71/53 _No MSS		

The spot check plan, approved by the FCC inquiry, allows for data reuse from the reference model where the variant model data meets the limits and has not changed by more than the criteria from KDB 484596 D01 v03 equation (4).

$$d_{dBmax}(M_{dB}) = \begin{cases} (3 + M_{dB}/20) \text{ dB, for } 0 \leq M_{dB} \leq 60 \text{ dB} \\ 6 \text{ dB, for } M_{dB} > 60 \text{ dB} \end{cases} \quad (4)$$

Where: d_{dBmax} is the maximum deviation d_{dB} allowed, M_{dB} is the margin in dB
 d_{dB} deviation from Reference data, V_{dB} variant spot check level, and R_{dB} measurement level

13.2. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3516

A3516 SPOT CHECK RESULTS											
Equipment Class / Technology	Frequency (GHz)	Mode	Data Rate / Tone / RU	Test Item	Channel	Measured Frequency (GHz)	Original Model: A3260	Sub Model: A3516	Delta (dB)	Margin	Remarks
							FCC ID : BCG-E8948A IC : 579C-E8948A	FCC ID : BCG-E8954A IC : 579C-E8954A			
NII / UNII-1	5.2G	HT40 (MIMO CDD) FCC	MCS0	Avg Power (dBm)	46	5230	22.45	22.42	-0.03	-1.55	Note 1
		HT40 (MIMO SDM) IC	MCS0	Avg Power (dBm)	46	5230	22.46	22.40	-0.06	-1.42	Note 1
		EHT20 (SISO)	MCS11 SU (ANT6)	Radiated Bandedge (dBuV/m)	36	Horizontal Low Bandedge	51.34	51.06	-0.28	-2.66	Note 1
		EHT40 (MIMO CDD)	MCS0 (52+26)T RU72	RSE (dBuV/m)	38	1 to 18	42.81	43.25	0.44	-11.19	Note 1
NII / UNII-2a	5.3G	HT40 (MIMO CDD)	MCS0	Avg Power (dBm)	54	5270	22.45	22.41	-0.04	-1.55	Note 1
		EHT160 (SISO)	MCS11 SU (ANT5)	Radiated Bandedge (dBuV/m)	50	Horizontal High Bandedge	51.45	53.85	2.40	-2.55	Note 1
		EHT20 (MIMO CDD)	MCS0 SU	RSE (dBuV/m)	52	1 to 18	45.49	45.56	0.07	-8.51	Note 1
NII / UNII-2c	5.6G	HT40 (MIMO CDD)	MCS0	Avg Power (dBm)	110	5550	22.49	22.39	-0.10	-1.51	Note 1
		VHT160 (SISO)	MCS9 SU (ANT5)	Radiated Bandedge (dBuV/m)	114	Horizontal Low Bandedge	49.68	46.89	-2.79	-4.32	Note 1
		EHT40 (MIMO CDD)	MCS0 SU	RSE (dBuV/m)	134	1 to 18	57.32	56.71	-0.61	-10.88	Note 1
NII / UNII-3	5.8G	EHT20 (MIMO CDD)	MCS0 SU	Avg Power (dBm)	157	5785	22.97	22.88	-0.09	-7.03	Note 1
		HT40 (MIMO CDD)	MCS0	Radiated Bandedge (dBuV/m)	151	Horizontal Low Bandedge	-30.72	-32.55	-1.83	-4.58	Note 1
		HT20 (MIMO CDD)	MCS0	RSE (dBuV/m)	165	1 to 18	43.47	44.03	0.56	-24.73	Note 1

Note 1: Deviation from reference to variant within the value allowed by equation (4) in KDB 484596. Additional tests not required.

Note 2: Deviation from reference to variant exceeds the value allowed by equation (4) in KDB 484596. Additional tests performed on second channel.

13.3. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3517

A3517 SPOT CHECK RESULTS											
Equipment Class / Technology	Frequency (GHz)	Mode	Data Rate / Tone / RU	Test Item	Channel	Measured Frequency (GHz)	Original Model: A3260	Sub Model: A3517	Delta (dB)	Margin	Remarks
							FCC ID : BCG-E8948A IC : 579C-E8948A	FCC ID : BCG-E8955A IC : 579C-E8955A			
NII / UNII-1	5.2G	HT40 (MIMO CDD) FCC	MCS0	Avg Power (dBm)	46	5230	22.45	22.40	-0.05	-1.55	Note 1
		HT40 (MIMO SDM) IC	MCS0	Avg Power (dBm)	46	5230	22.46	22.42	-0.04	-1.42	Note 1
		EHT20 (SISO)	MCS11 SU (ANT6)	Radiated Bandedge (dBuV/m)	36	Horizontal Low Bandedge	51.34	50.73	-0.61	-2.66	Note 1
		EHT40 (MIMO CDD)	MCS0 (52+26)T RU72	RSE (dBuV/m)	38	1 to 18	42.81	44.71	1.90	-11.19	Note 1
NII / UNII-2a	5.3G	HT40 (MIMO CDD)	MCS0	Avg Power (dBm)	54	5270	22.45	22.39	-0.06	-1.55	Note 1
		EHT160 (SISO)	MCS11 SU (ANT5)	Radiated Bandedge (dBuV/m)	50	Horizontal High Bandedge	51.45	52.97	1.52	-2.55	Note 1
		EHT20 (MIMO CDD)	MCS0 SU	RSE (dBuV/m)	52	1 to 18	45.49	43.60	-1.89	-8.51	Note 1
NII / UNII-2c	5.6G	HT40 (MIMO CDD)	MCS0 484T RU65	Avg Power (dBm)	110	5550	22.49	22.43	-0.06	-1.51	Note 1
		VHT160 (SISO)	MCS9 SU (ANT5)	Radiated Bandedge (dBuV/m)	106	Horizontal Low Bandedge	49.68	47.45	-2.23	-4.32	Note 1
		EHT40 (MIMO CDD)	MCS0 SU	RSE (dBuV/m)	134	1 to 18	57.32	56.69	-0.63	-10.88	Note 1
NII / UNII-3	5.8G	EHT20 (MIMO CDD)	MCS0 SU	Avg Power (dBm)	157	5785	22.97	22.93	-0.04	-7.03	Note 1
		HT40 (MIMO CDD)	MCS0	Radiated Bandedge (dBuV/m)	151	Horizontal Low Bandedge	-30.72	-31.97	-1.25	-4.58	Note 1
		HT20 (MIMO CDD)	MCS0	RSE (dBuV/m)	165	1 to 18	43.47	43.73	0.26	-24.73	Note 1

Note 1: Deviation from reference to variant within the value allowed by equation (4) in KDB 484596. Additional tests not required.

Note 2: Deviation from reference to variant exceeds the value allowed by equation (4) in KDB 484596. Additional tests performed on second channel.

13.4. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3518

A3518 SPOT CHECK RESULTS											
Equipment Class / Technology	Frequency (GHz)	Mode	Data Rate / Tone / RU	Test Item	Channel	Measured Frequency (GHz)	Original Model: A3260	Sub Model: A3518	Delta (dB)	Margin	Remarks
							FCC ID : BCG-E8948A IC : 579C-E8948A	FCC ID : BCG-E8956A IC : 579C-E8956A			
NII / UNII-1	5.2G	HT40 (MIMO CDD) FCC	MCS0	Avg Power (dBm)	46	5230	22.45	22.38	-0.07	-1.55	Note 1
		HT40 (MIMO SDM) IC	MCS0	Avg Power (dBm)	46	5230	22.46	22.40	-0.06	-1.42	Note 1
		EHT20 (SISO)	MCS11 SU (ANT6)	Radiated Bandedge (dBuV/m)	36	Horizontal Low Bandedge	51.34	50.92	-0.42	-2.66	Note 1
		EHT40 (MIMO CDD)	MCS0 (52+26)T RU72	RSE (dBuV/m)	38	1 to 18	42.81	42.76	-0.05	-11.19	Note 1
NII / UNII-2a	5.3G	HT40 (MIMO CDD)	MCS0	Avg Power (dBm)	54	5270	22.45	22.40	-0.05	-1.55	Note 1
		EHT160 (SISO)	MCS11 SU (ANT5)	Radiated Bandedge (dBuV/m)	50	Horizontal High Bandedge	51.45	49.56	-1.89	-2.55	Note 1
		EHT20 (MIMO CDD)	MCS0 SU	RSE (dBuV/m)	52	1 to 18	45.49	43.78	-1.71	-8.51	Note 1
NII / UNII-2c	5.6G	HT40 (MIMO CDD)	MCS0 484T RU65	Avg Power (dBm)	110	5550	22.49	22.45	-0.04	-1.51	Note 1
		VHT160 (SISO)	MCS9 (ANT5)	Radiated Bandedge (dBuV/m)	106	Horizontal Low Bandedge	49.68	48.25	-1.43	-4.32	Note 1
		EHT40 (MIMO CDD)	MCS0 106T RU60	RSE (dBuV/m)	134	1 to 18	57.32	57.01	-0.31	-10.88	Note 1
NII / UNII-3	5.8G	EHT20 (MIMO CDD)	MCS0 SU	Avg Power (dBm)	157	5785	22.97	22.95	-0.02	-7.03	Note 1
		HT40 (MIMO CDD)	MCS0	Radiated Bandedge (dBuV/m)	151	Horizontal Low Bandedge	-30.72	-33.39	-2.67	-4.58	Note 1
		HT20 (MIMO CDD)	MCS0	RSE (dBuV/m)	165	1 to 18	43.47	44.23	0.76	-24.73	Note 1

Note 1: Deviation from reference to variant within the value allowed by equation (4) in KDB 484596. Additional tests not required.

Note 2: Deviation from reference to variant exceeds the value allowed by equation (4) in KDB 484596. Additional tests performed on second channel.

END OF REPORT