



VERTICAL RESULT

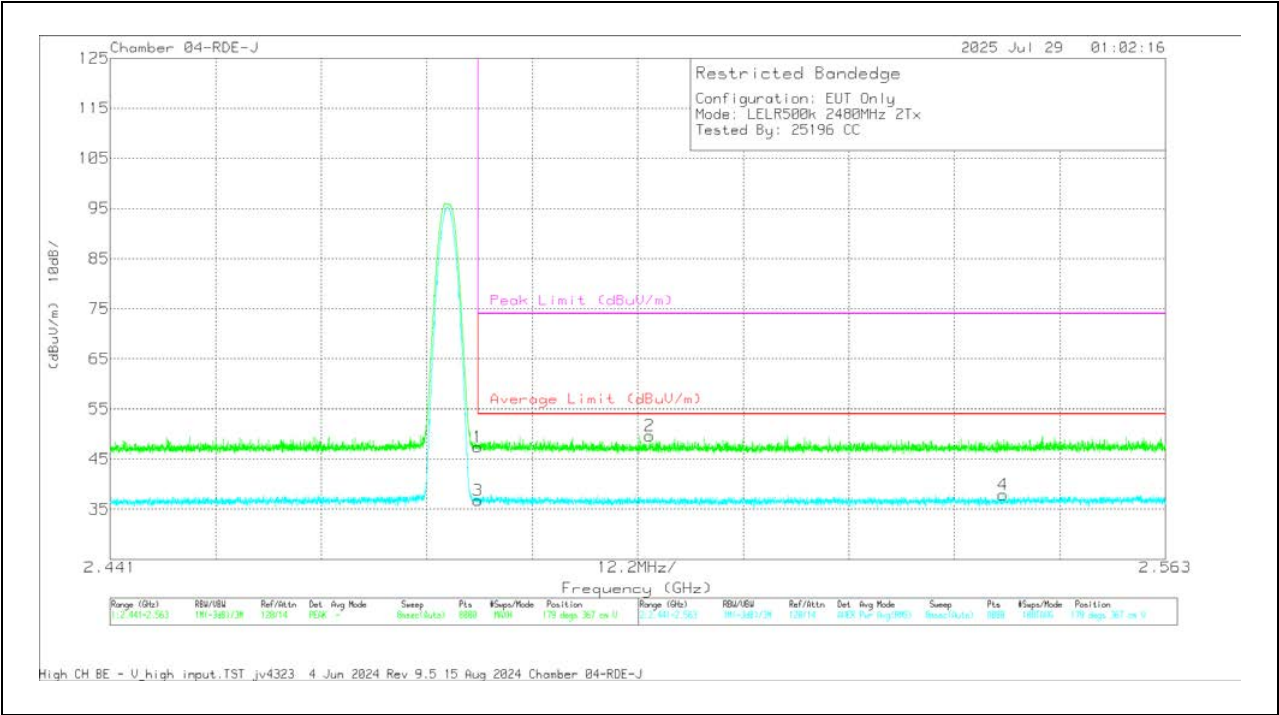

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	43.15	Pk	32.4	-28.1	0	47.45	-	-	74	-26.55	179	367	V
2	2.503365	45.22	Pk	32.5	-28.1	0	49.62	-	-	74	-24.38	179	367	V
3	* 2.4835	32	RMS	32.4	-28.1	.42	36.72	54	-17.28	-	-	179	367	V
4	2.544241	33.11	RMS	32.5	-28.1	.42	37.93	54	-16.07	-	-	179	367	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

10.2.13. LOW POWER BLE (LE1M)

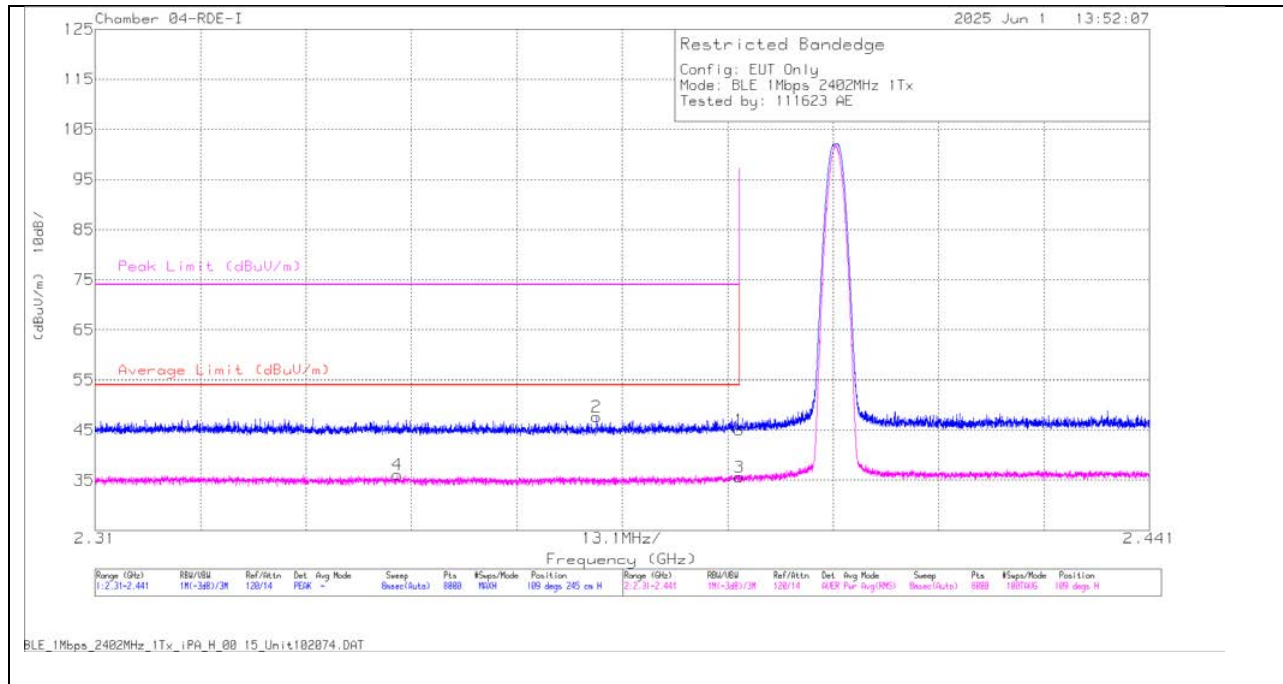ANT 4**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222740 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.75	Pk	31.8	-29.5	0	45.05	-	-	74	-28.95	109	245	H
2	* 2.372298	45.5	Pk	31.7	-29.6	0	47.6	-	-	74	-26.4	109	245	H
3	* 2.39	32.57	RMS	31.8	-29.5	.71	35.58	54	-18.42	-	-	109	245	H
4	* 2.347552	33.1	RMS	31.7	-29.4	.71	36.11	54	-17.89	-	-	109	245	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

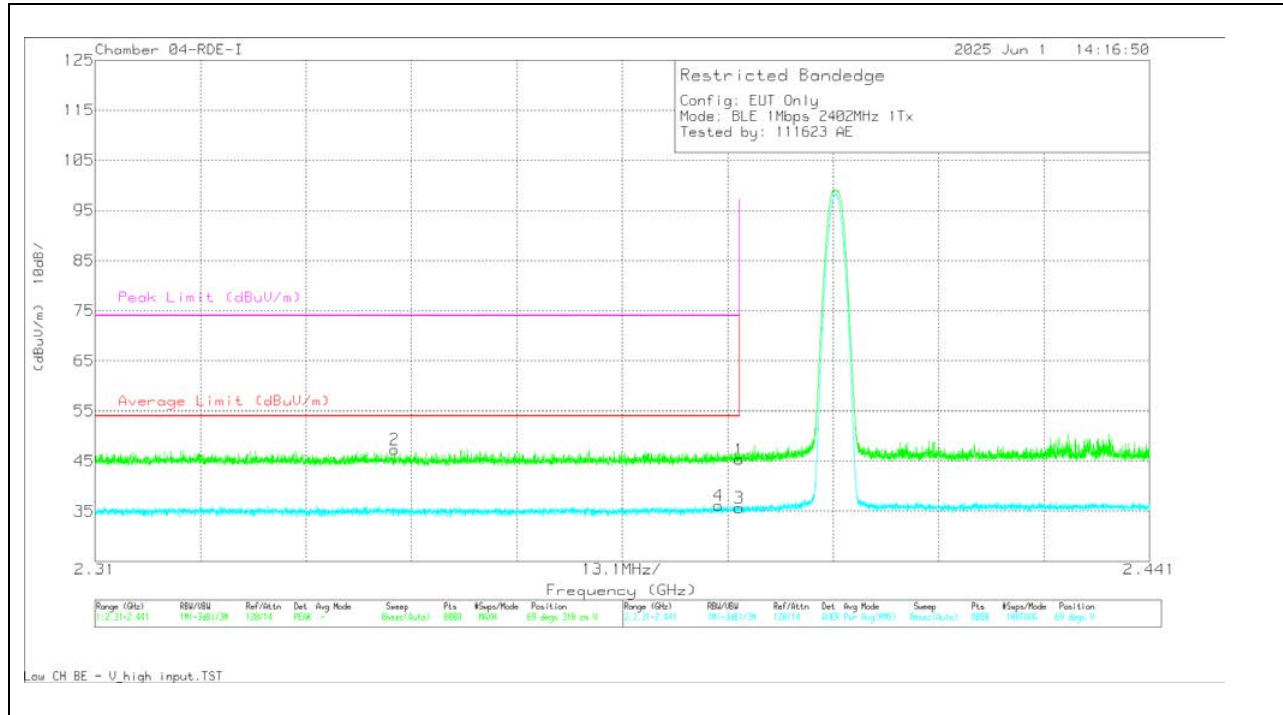


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222740 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	43.04	Pk	31.8	-29.5	0	45.34	-	-	74	-28.66	69	318	V
2	* 2.347209	45.01	Pk	31.7	-29.4	0	47.31	-	-	74	-26.69	69	318	V
3	* 2.39	32.64	RMS	31.8	-29.5	.71	35.65	54	-18.35	-	-	69	318	V
4	* 2.38748	33.15	RMS	31.8	-29.5	.71	36.16	54	-17.84	-	-	69	318	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

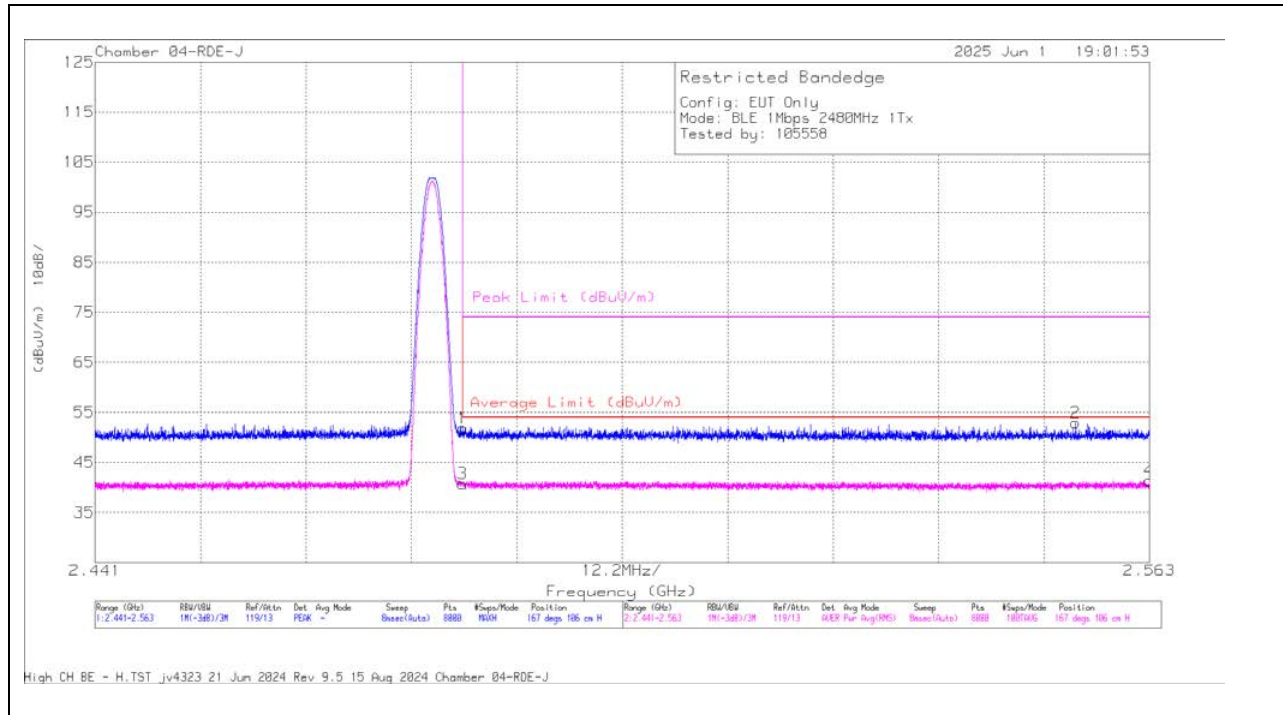BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	56.26	Pk	32.4	-36.9	0	51.76	-	-	74	-22.24	167	106	H
3	* 2.4835	44.56	RMS	32.4	-36.9	.71	40.77	54	-13.23	-	-	167	106	H
2	2.554414	57.22	Pk	32.6	-36.9	0	52.92	-	-	74	-21.08	167	106	H
4	2.563	44.94	RMS	32.6	-36.9	.71	41.35	54	-12.65	-	-	167	106	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

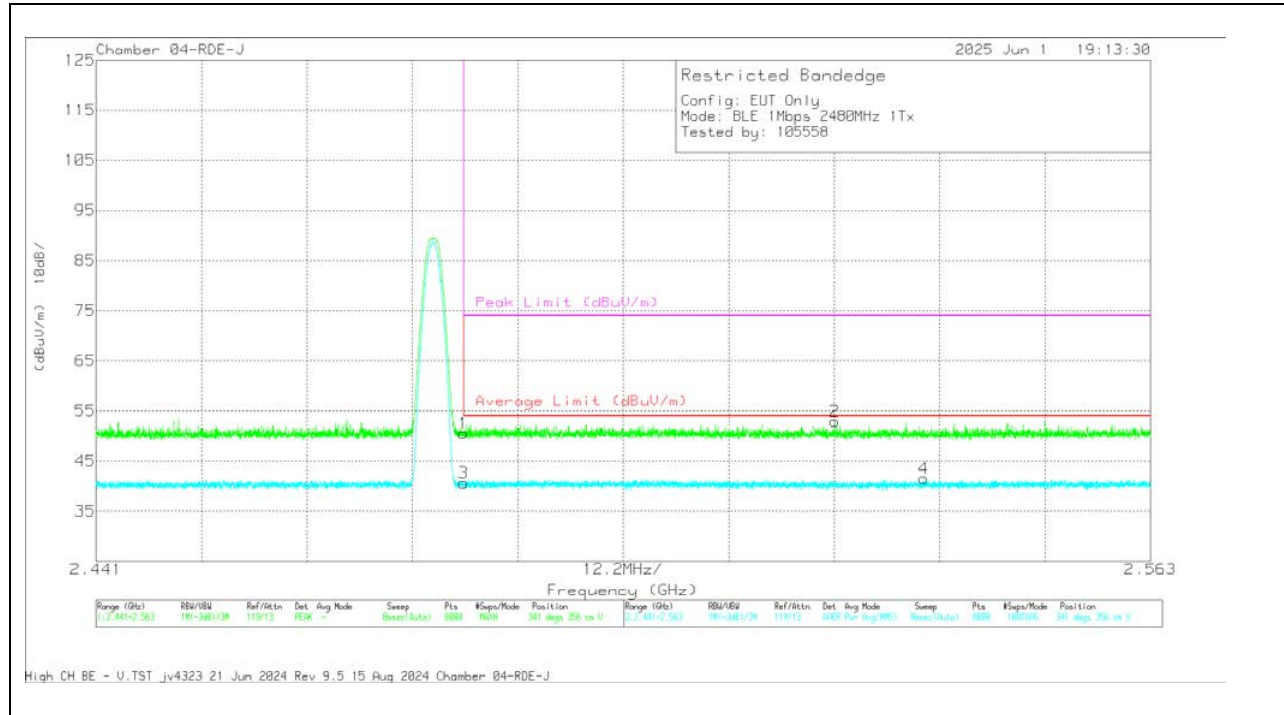


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	55.03	Pk	32.4	-36.9	0	50.53	-	-	74	-23.47	341	356	V
3	* 2.4835	44.42	RMS	32.4	-36.9	.71	40.63	54	-13.37	-	-	341	356	V
2	*2.526457	57.3	Pk	32.5	-36.9	0	52.9	-	-	74	-21.1	341	356	V
4	*2.536767	45.16	RMS	32.5	-36.9	.71	41.47	54	-12.53	-	-	341	356	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

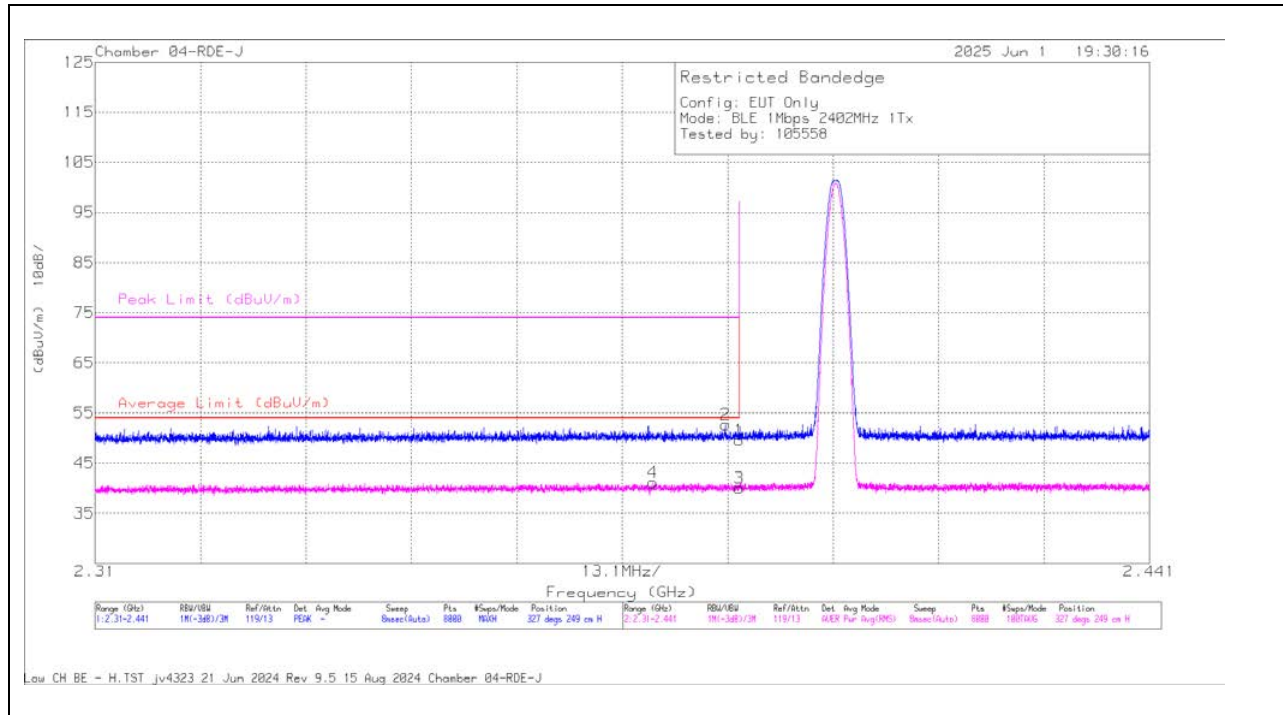ANT 3**BANDEGE (LOW CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	54.48	PK	32.2	-37.1	0	49.58	-	-	74	-24.42	327	249	H
2	* 2.388348	57.51	PK	32.2	-37.1	0	52.61	-	-	74	-21.39	327	249	H
3	* 2.39	44.23	RMS	32.2	-37.1	.71	40.04	54	-13.96	-	-	327	249	H
4	* 2.379324	45.32	RMS	32.2	-37.1	.71	41.13	54	-12.87	-	-	327	249	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

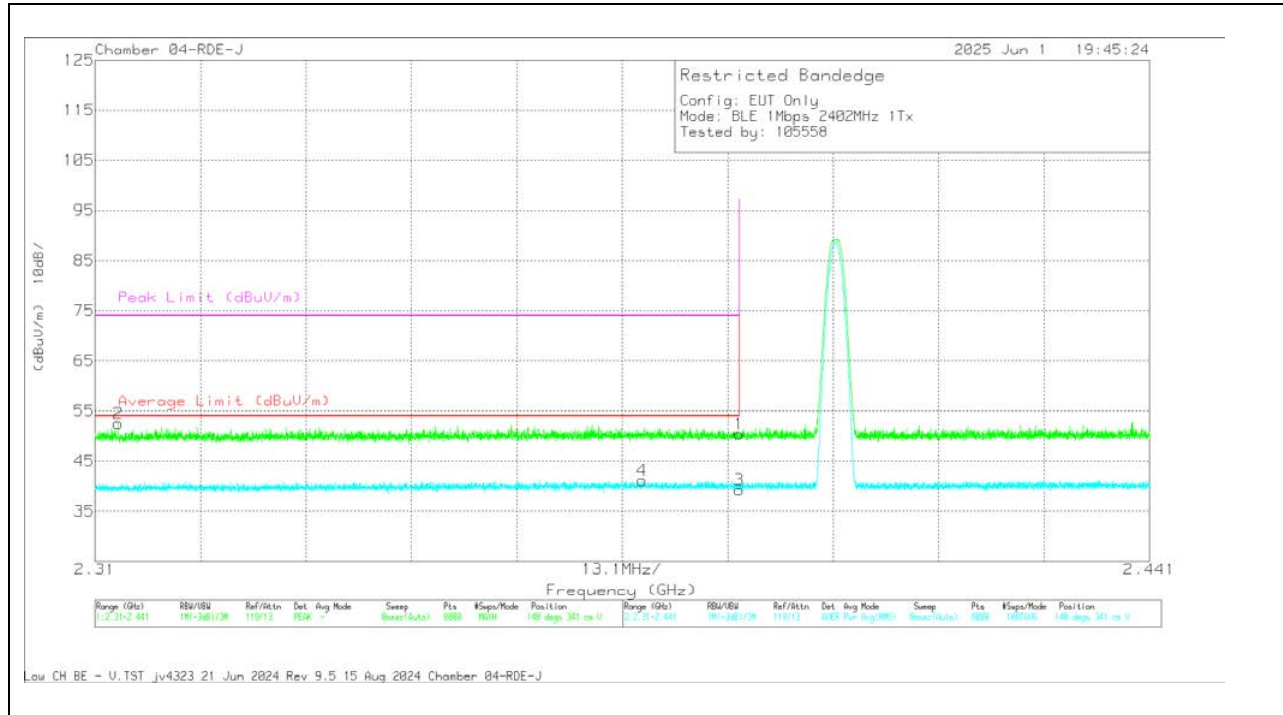


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Ampl/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	55.27	Pk	32.2	-37.1	0	50.37	-	-	74	-23.63	148	341	V
2	* 2.312866	57.78	Pk	31.8	-37.1	0	52.48	-	-	74	-21.52	148	341	V
3	* 2.39	43.41	RMS	32.2	-37.1	.71	39.22	54	-14.78	-	-	148	341	V
4	* 2.377997	45.21	RMS	32.2	-37	.71	41.12	54	-12.88	-	-	148	341	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

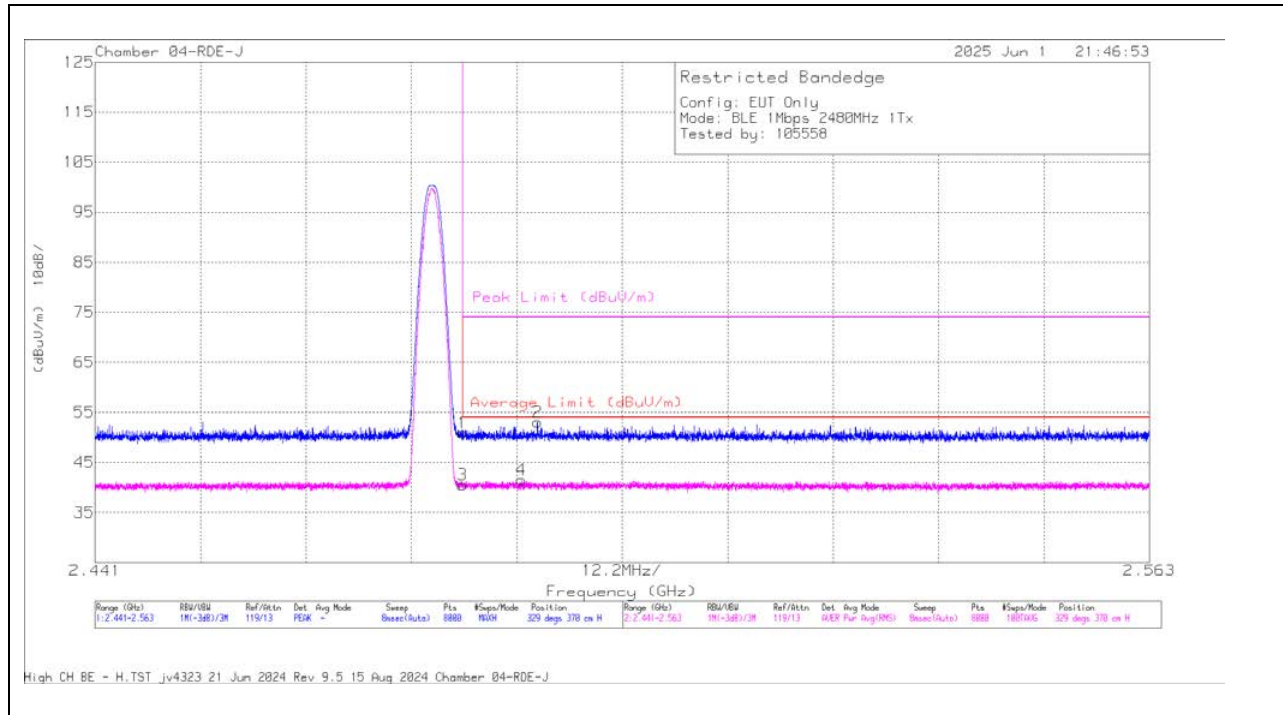BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Ampl/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	55.4	Pk	32.4	-36.9	0	50.9	-	-	74	-23.1	329	370	H
2	* 2.492186	57.39	Pk	32.5	-36.9	0	52.99	-	-	74	-21.01	329	370	H
3	* 2.4835	44.3	RMS	32.4	-36.9	.71	40.51	54	-13.49	-	-	329	370	H
4	* 2.490294	45.17	RMS	32.5	-36.9	.71	41.48	54	-12.52	-	-	329	370	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

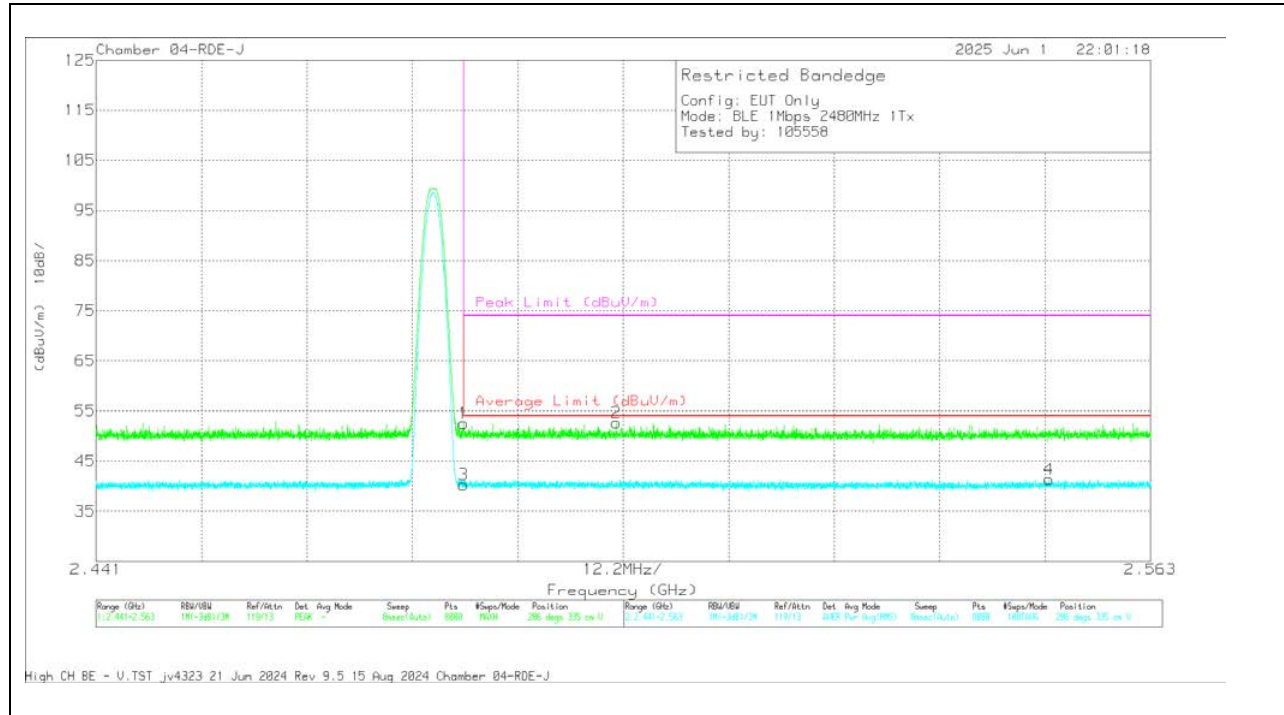

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Ampl/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	57	Pk	32.4	-36.9	0	52.5	-	-	74	-21.5	286	335	V
2	2.5012	57.04	Pk	32.5	-36.9	0	52.64	-	-	74	-21.36	286	335	V
3	* 2.4835	44.01	RMS	32.4	-36.9	.71	40.22	54	-13.78	-	-	286	335	V
4	*2.551272	44.93	RMS	32.6	-36.9	.71	41.34	54	-12.66	-	-	286	335	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

10.2.14. LOW POWER BLE TXBF (LE1M)

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

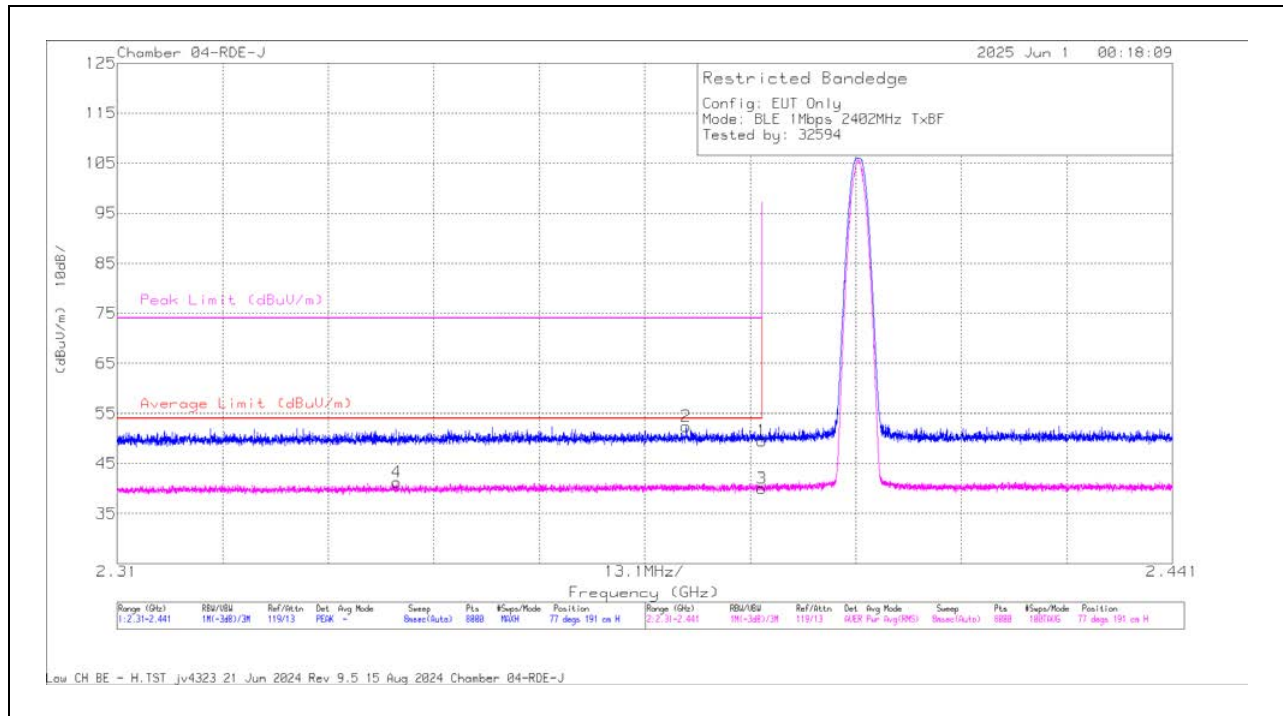


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	54.4	Pk	32.2	-37.1	0	49.5	-	-	74	-24.5	77	191	H
2	* 2.38065	57.32	Pk	32.2	-37.1	0	52.42	-	-	74	-21.58	77	191	H
3	* 2.39	44.25	RMS	32.2	-37.1	.71	40.06	54	-13.94	-	-	77	191	H
4	* 2.344719	45.62	RMS	32	-37.1	.71	41.23	54	-12.77	-	-	77	191	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

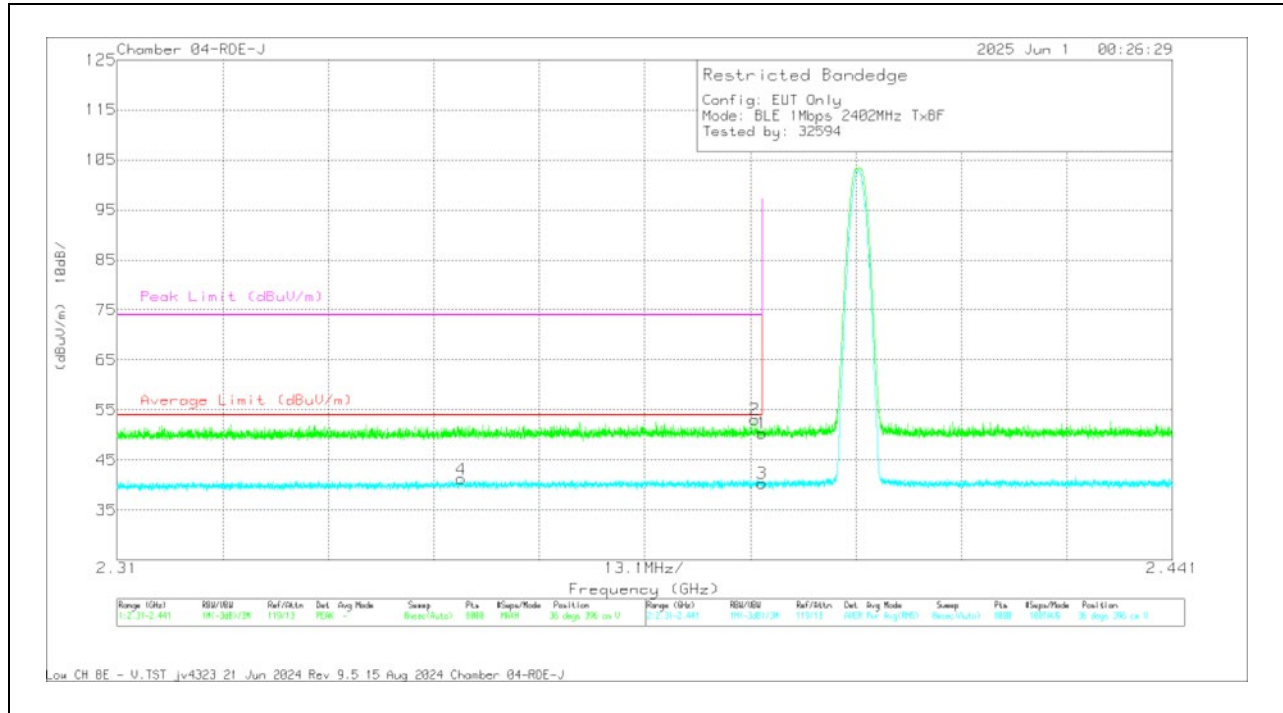


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	55.28	Pk	32.2	-37.1	0	50.38	-	-	74	-23.62	36	396	V
2	* 2.389183	58.03	Pk	32.2	-37.1	0	53.13	-	-	74	-20.87	36	396	V
3	* 2.39	44.61	RMS	32.2	-37.1	.71	40.42	54	-13.58	-	-	36	396	V
4	* 2.352695	45.49	RMS	32.1	-37.1	.71	41.2	54	-12.8	-	-	36	396	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

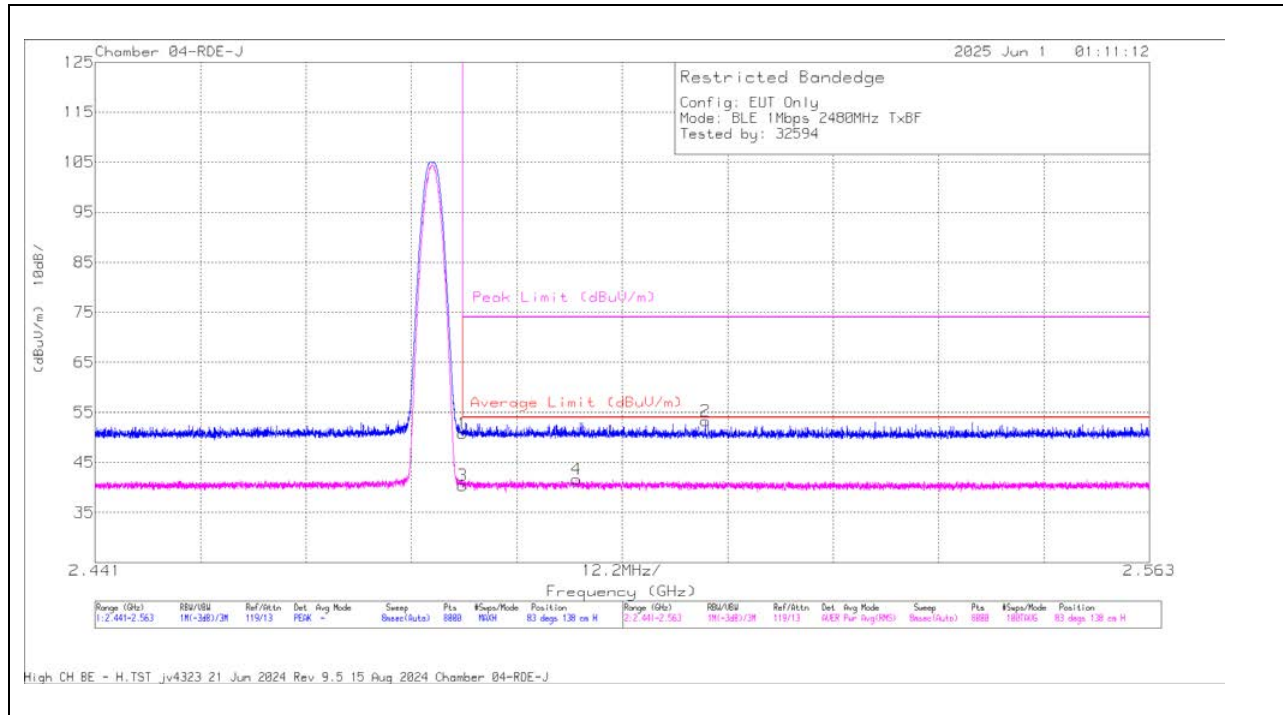BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	55.3	Pk	32.4	-36.9	0	50.8	-	-	74	-23.2	83	138	H
2	2.511602	57.67	Pk	32.5	-36.9	0	53.27	-	-	74	-20.73	83	138	H
3	* 2.4835	44.19	RMS	32.4	-36.9	.71	40.4	54	-13.6	-	-	83	138	H
4	* 2.4967	45.36	RMS	32.5	-36.9	.71	41.67	54	-12.33	-	-	83	138	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

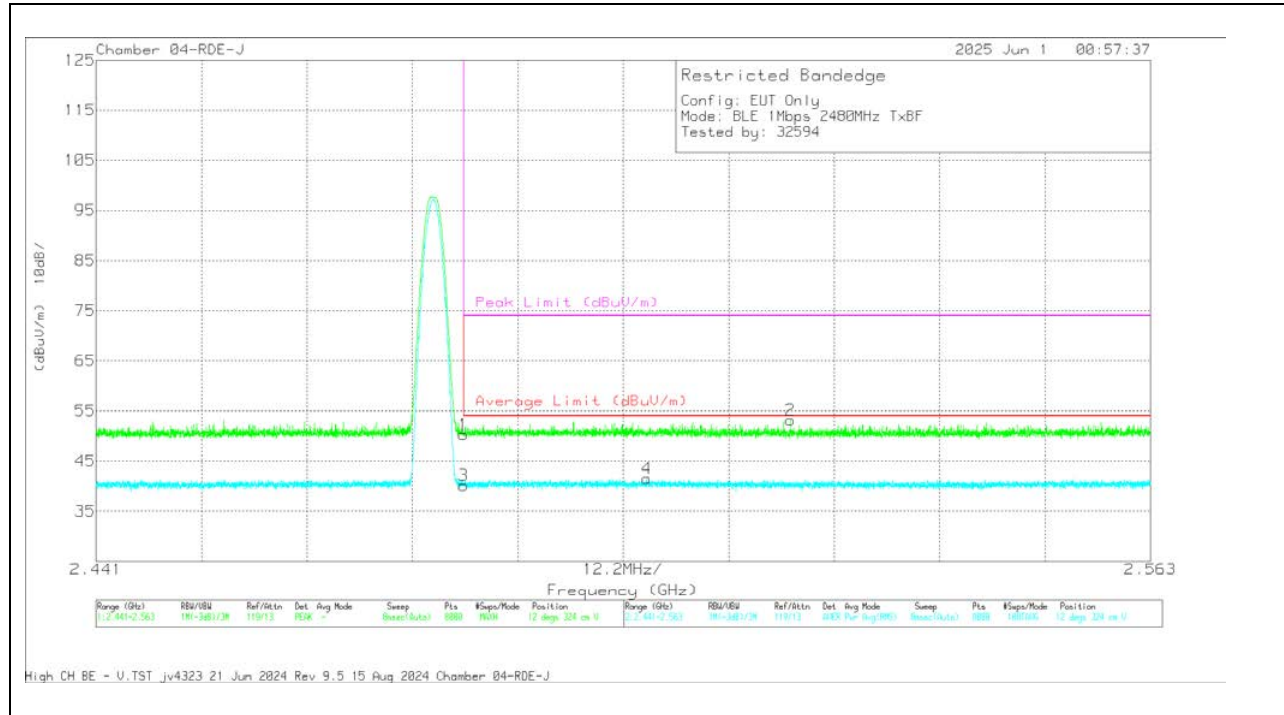


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	54.76	Pk	32.4	-36.9	0	50.26	-	-	74	-23.74	12	324	V
2	2.521302	57.53	Pk	32.5	-36.9	0	53.13	-	-	74	-20.87	12	324	V
3	* 2.4835	43.91	RMS	32.4	-36.9	.71	40.12	54	-13.88	-	-	12	324	V
4	2.504708	45.2	RMS	32.5	-36.9	.71	41.51	54	-12.49	-	-	12	324	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

10.2.15. LOW POWER BLE (LE2M)

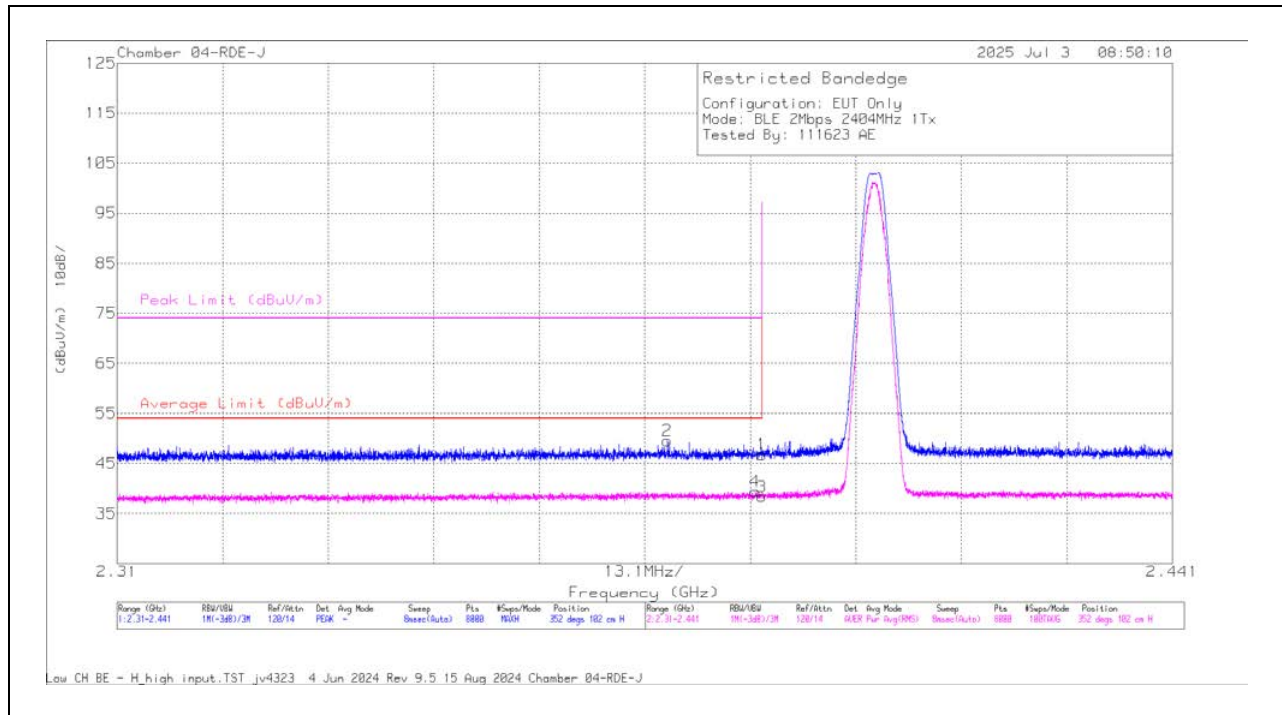ANT 4**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.8	PK	32.2	-28.2	0	46.8	-	-	74	-27.2	352	102	H
2	* 2.378308	45.49	PK	32.2	-28.2	0	49.49	-	-	74	-24.51	352	102	H
3	* 2.39	31.87	RMS	32.2	-28.2	2.45	38.32	54	-15.68	-	-	352	102	H
4	* 2.389183	32.96	RMS	32.2	-28.2	2.45	39.41	54	-14.59	-	-	352	102	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

Chamber 04-RDE-J 2025 Jul 3 09:13:19

Restricted Bandedge
Configuration: EUT Only
Mode: BLE 2Mbps 2404MHz ITx
Tested By: 111623 AE

Peak Limit (dBu/m)
Average Limit (dBu/m)

13.1 MHz/
Frequency (GHz)


Range (GHz) RBW/VBW Ref/Antn Det. Avg Mode Sweep Pts KHzs/Mode Position
1.2 21~2.441 100~2404/20 120/10 REAR - 1000 1000 259 steps 254 on U

Range (GHz) RBW/VBW Ref/Antn Det. Avg Mode Sweep Pts KHzs/Mode Position
1.2 21~2.441 100~2404/20 120/10 REAR For Avg (999) 1000 1000 259 steps 254 on U

Low CH BE - U_high input.TST jv4323 4 Jun 2024 Rev 9.5 15 Aug 2024 Chamber 04-RDE-J

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	86707 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.67	Pk	32.2	-28.2	0	46.67	-	-	74	-27.33	359	354	V
2	* 2.344998	45.73	Pk	32	-28.4	0	49.33	-	-	74	-24.67	359	354	V
3	* 2.39	31.61	RMS	32.2	-28.2	2.45	38.06	54	-15.94	-	-	359	354	V
4	* 2.372233	33	RMS	32.2	-28.3	2.45	39.35	54	-14.65	-	-	359	354	V

Pk - Peak detector
RMS - RMS detection

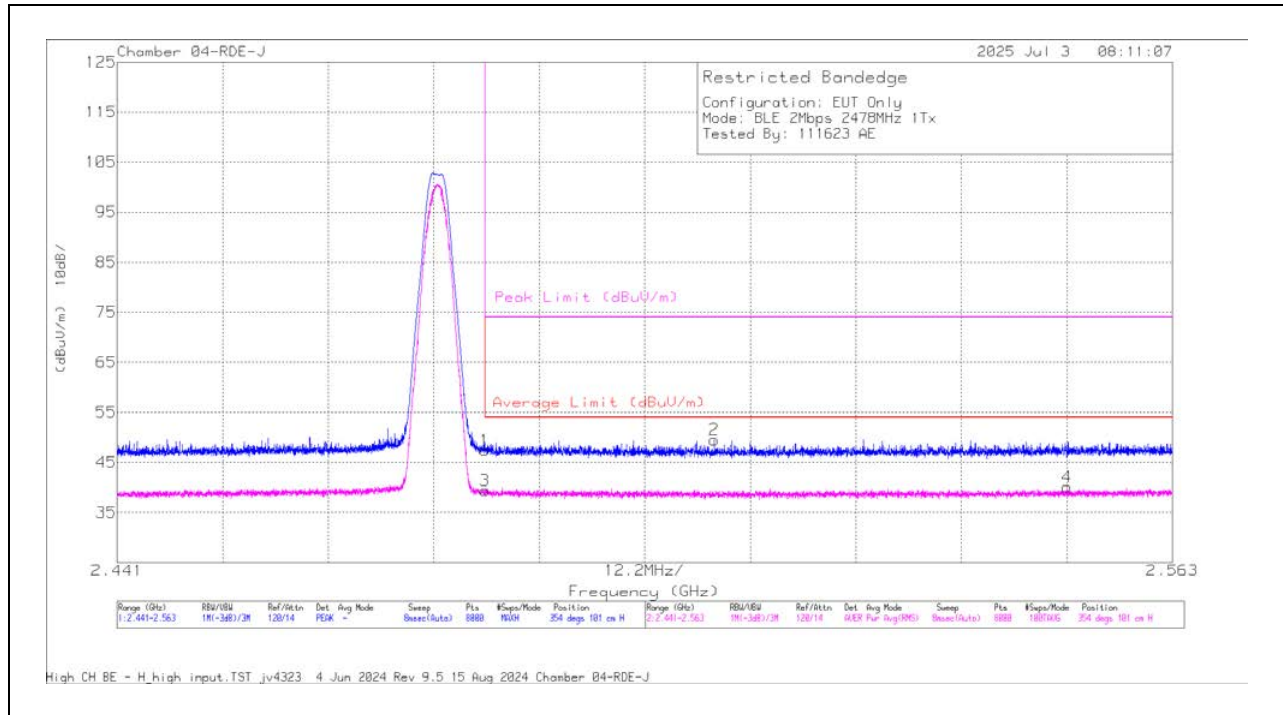BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	AmplCbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	43.07	Pk	32.4	-28.1	0	47.37	-	-	74	-26.63	354	101	H
2	2.510046	45.15	PK	32.5	-28.1	0	49.55	-	-	74	-24.45	354	101	H
3	* 2.4835	32.59	RMS	32.4	-28.1	2.45	39.34	54	-14.66	-	-	354	101	H
4	*2.550845	33.12	RMS	32.6	-28.1	2.45	40.07	54	-13.93	-	-	354	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

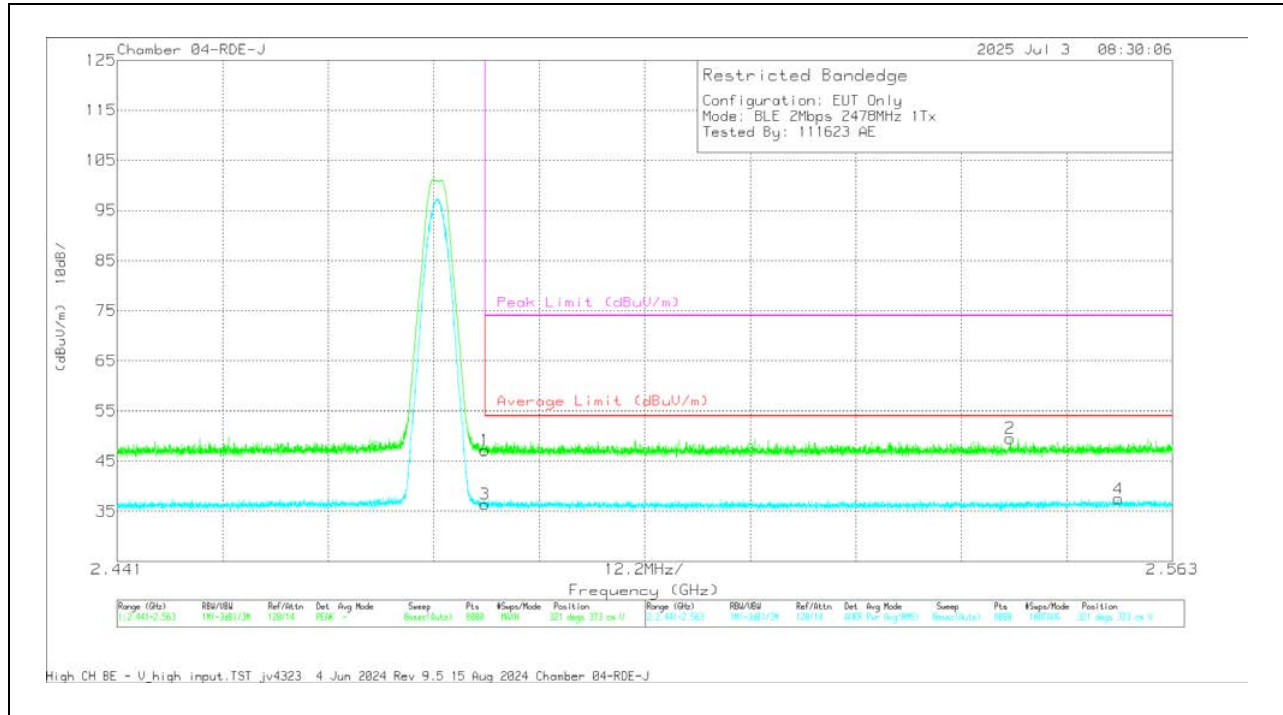


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Ampl/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	42.83	Pk	32.4	-28.1	0	47.13	-	-	74	-26.87	321	373	V
2	2.544256	45.14	Pk	32.5	-28.1	0	49.54	-	-	74	-24.46	321	373	V
3	* 2.4835	32.04	RMS	32.4	-28.1	2.45	38.79	54	-15.21	-	-	321	373	V
4	*2.556732	32.95	RMS	32.6	-28.1	2.45	39.90	54	-14.10	-	-	321	373	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

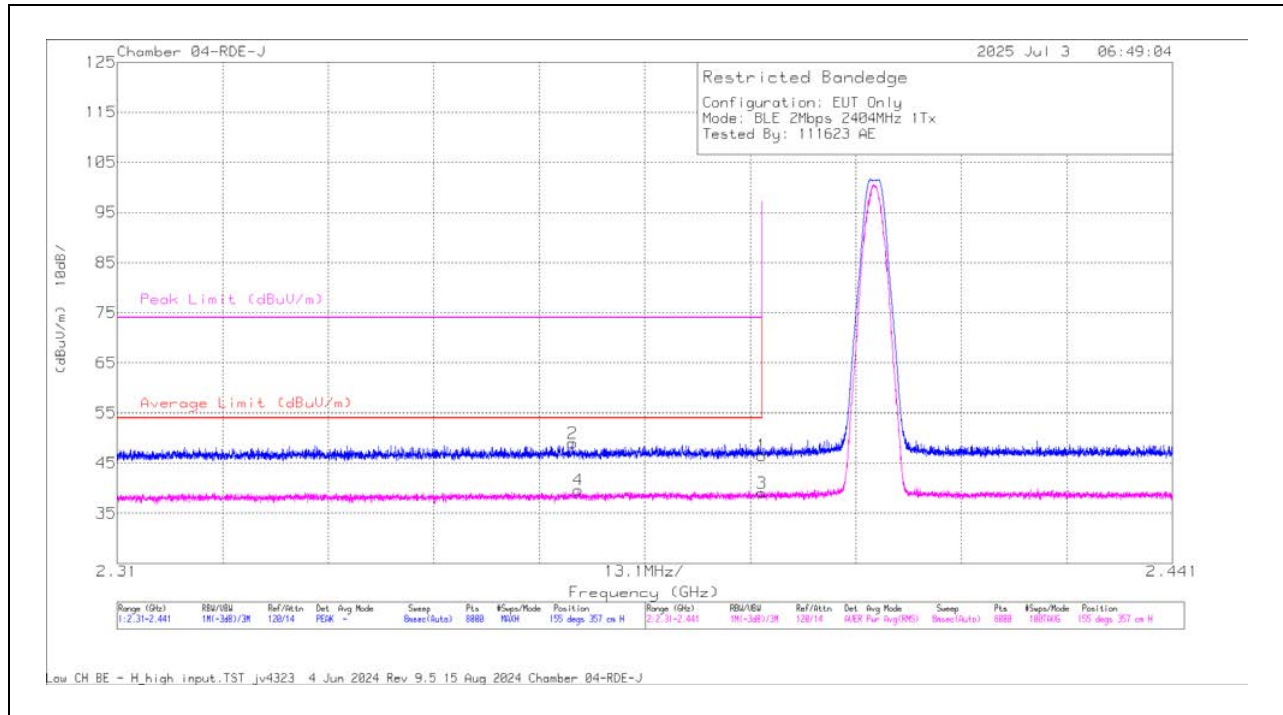ANT 3**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Ampl/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.52	Pk	32.2	-28.2	0	46.52	-	-	74	-27.48	155	357	H
2	* 2.36655	45.16	Pk	32.1	-28.3	0	48.96	-	-	74	-25.04	155	357	H
3	* 2.39	32.61	RMS	32.2	-28.2	2.45	39.06	54	-14.94	-	-	155	357	H
4	* 2.36727	33.4	RMS	32.1	-28.3	2.45	39.65	54	-14.35	-	-	155	357	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

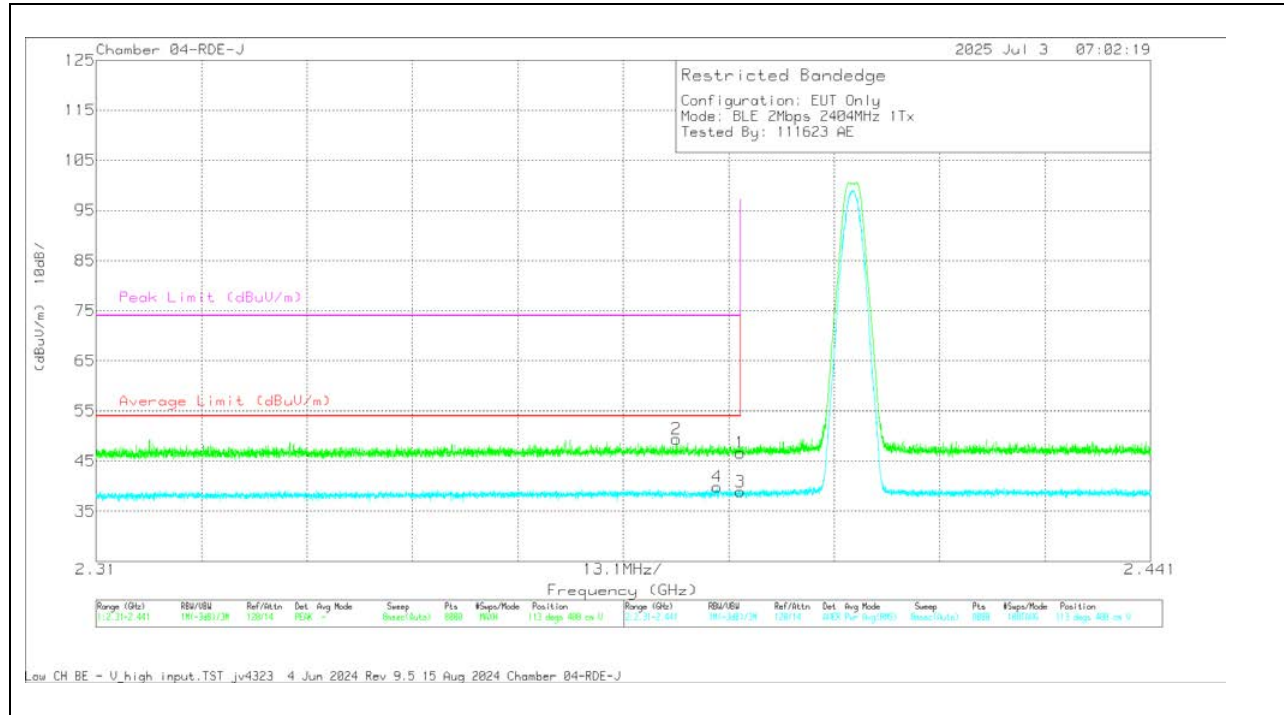


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.63	Pk	32.2	-28.2	0	46.63	-	-	74	-27.37	113	400	V
2	* 2.382075	45.47	Pk	32.2	-28.3	0	49.37	-	-	74	-24.63	113	400	V
3	* 2.39	32.39	RMS	32.2	-28.2	2.45	38.84	54	-15.16	-	-	113	400	V
4	* 2.387136	33.48	RMS	32.2	-28.2	2.45	39.93	54	-14.07	-	-	113	400	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

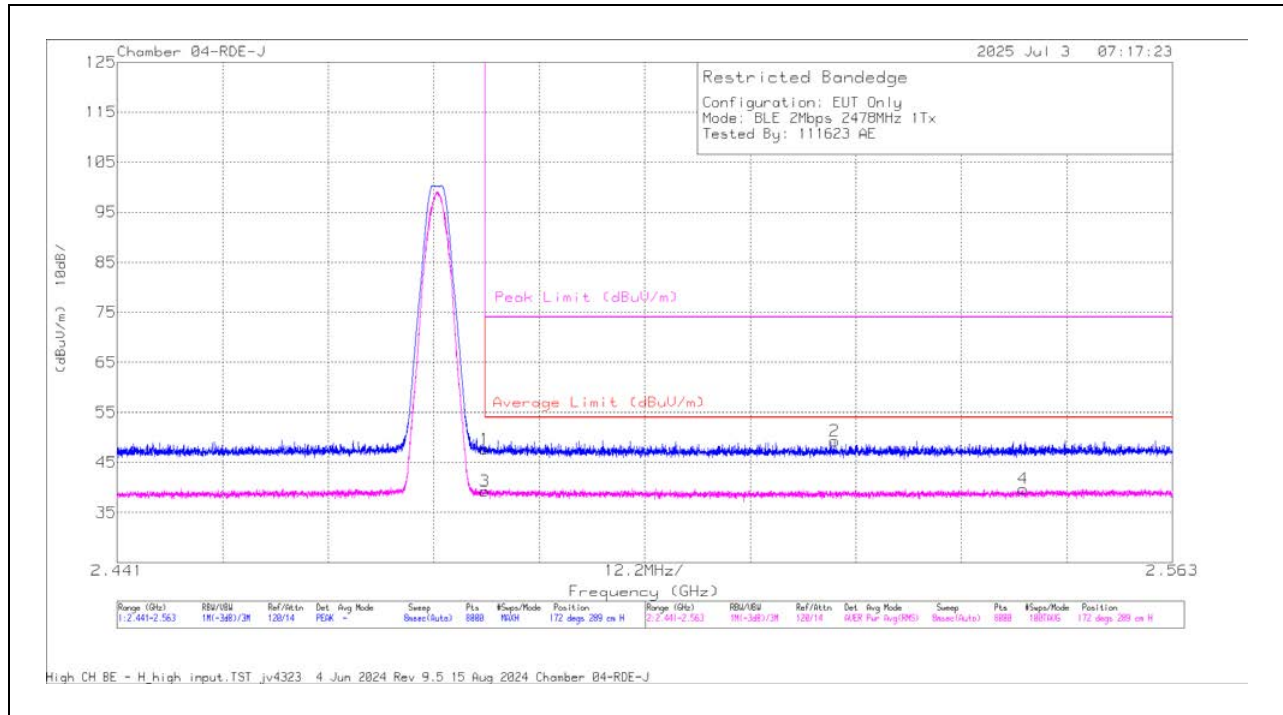BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	43.38	Pk	32.4	-28.1	0	47.68	-	-	74	-26.32	172	289	H
2	*2.52394	44.88	Pk	32.5	-28.1	0	49.28	-	-	74	-24.72	172	289	H
3	* 2.4835	32.51	RMS	32.4	-28.1	2.45	39.26	54	-14.74	-	-	172	289	H
4	*2.54572	32.85	RMS	32.6	-28.1	2.45	39.80	54	-14.20	-	-	172	289	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

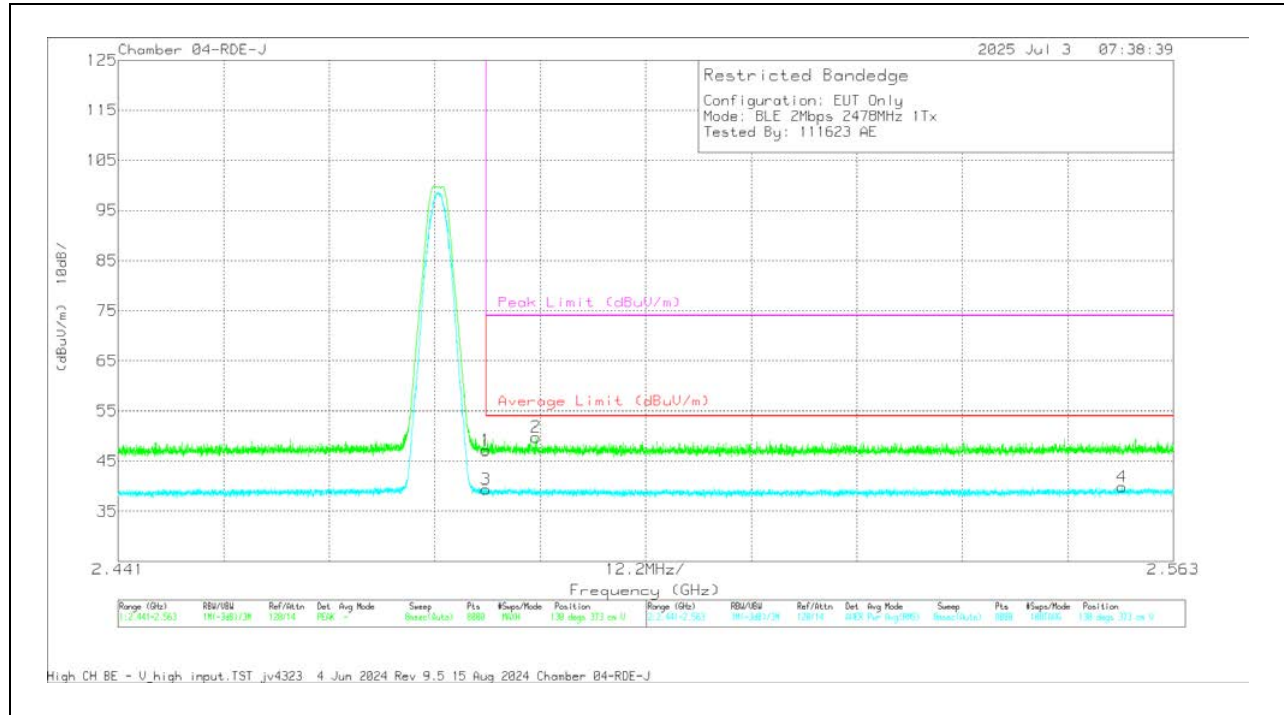

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	42.88	Pk	32.4	-28.1	0	47.18	-	-	74	-26.82	130	373	V
2	* 2.489334	45.33	Pk	32.5	-28.1	0	49.73	-	-	74	-24.27	130	373	V
3	* 2.4835	32.65	RMS	32.4	-28.1	2.45	39.40	54	-14.60	-	-	130	373	V
4	*2.557022	32.92	RMS	32.6	-28.1	2.45	39.87	54	-14.13	-	-	130	373	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

10.2.16. LOW POWER BLE TXBF (LE2M)

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

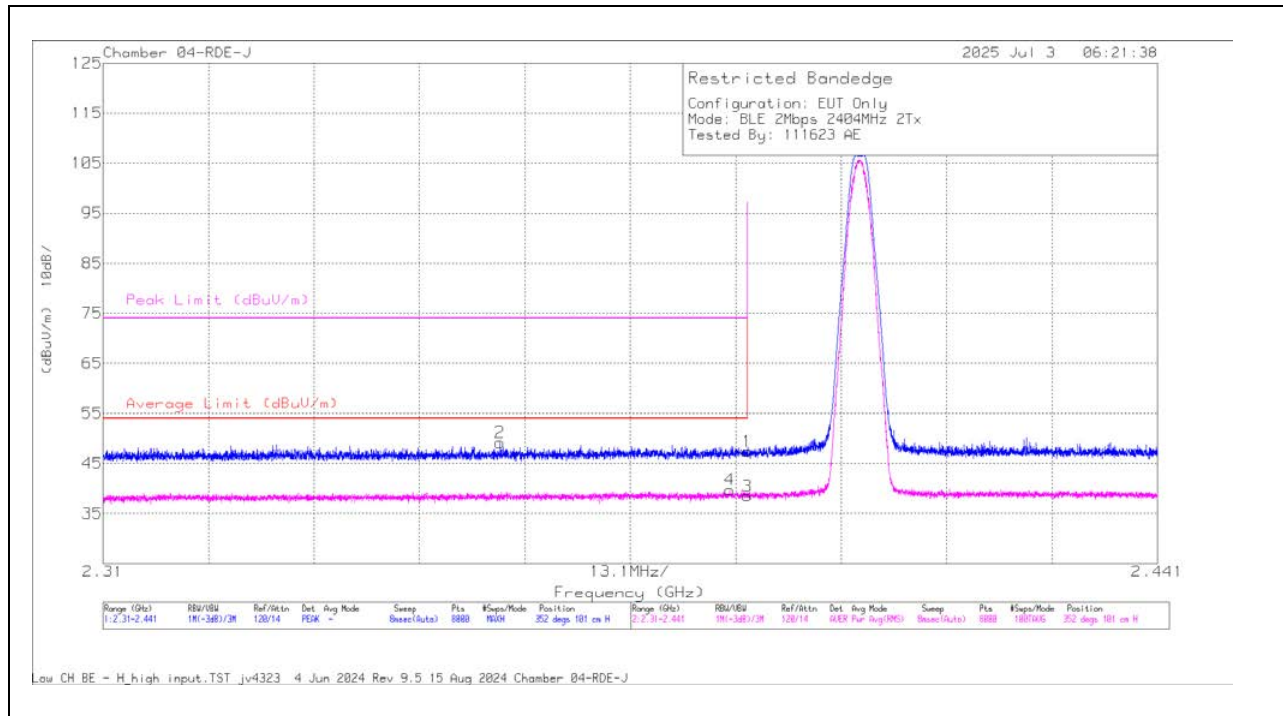


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	43.37	Pk	32.2	-28.2	0	47.37	-	-	74	-26.63	352	101	H
2	* 2.359311	45.47	Pk	32.1	-28.4	0	49.17	-	-	74	-24.83	352	101	H
3	* 2.39	31.99	RMS	32.2	-28.2	2.45	38.44	54	-15.56	-	-	352	101	H
4	* 2.38784	33.31	RMS	32.2	-28.2	2.45	39.76	54	-14.24	-	-	352	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

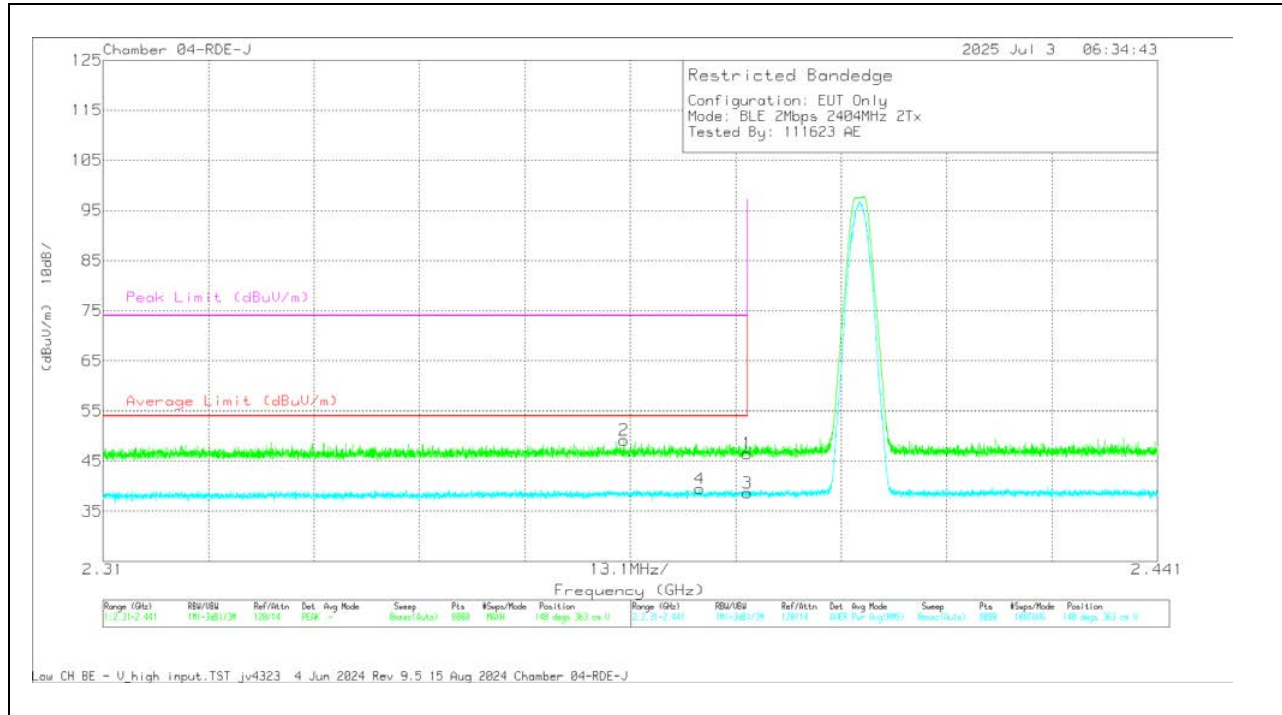


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.57	PK	32.2	-28.2	0	46.57	-	-	74	-27.43	148	363	V
2	* 2.374706	45.16	PK	32.2	-28.2	0	49.16	-	-	74	-24.84	148	363	V
3	* 2.39	32.22	RMS	32.2	-28.2	2.45	38.67	54	-15.33	-	-	148	363	V
4	* 2.384122	33.1	RMS	32.2	-28.3	2.45	39.45	54	-14.55	-	-	148	363	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

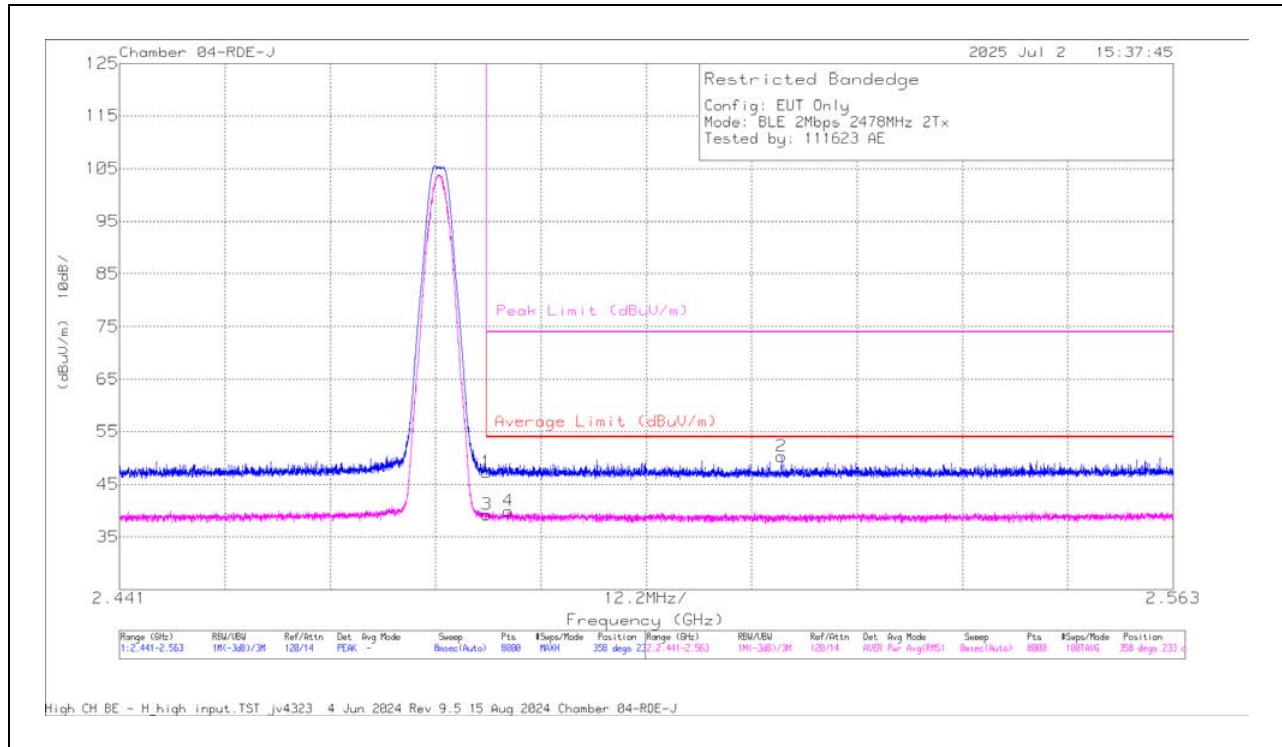BANEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	43.02	Pk	32.4	-28.1	0	47.32	-	-	74	-26.68	358	233	H
2	2.517641	45.93	Pk	32.5	-28.1	0	50.33	-	-	74	-23.67	358	233	H
3	* 2.4835	32.53	RMS	32.4	-28.1	2.45	39.28	54	-14.72	-	-	358	233	H
4	* 2.486039	33.18	RMS	32.5	-28.2	2.45	39.93	54	-14.07	-	-	358	233	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

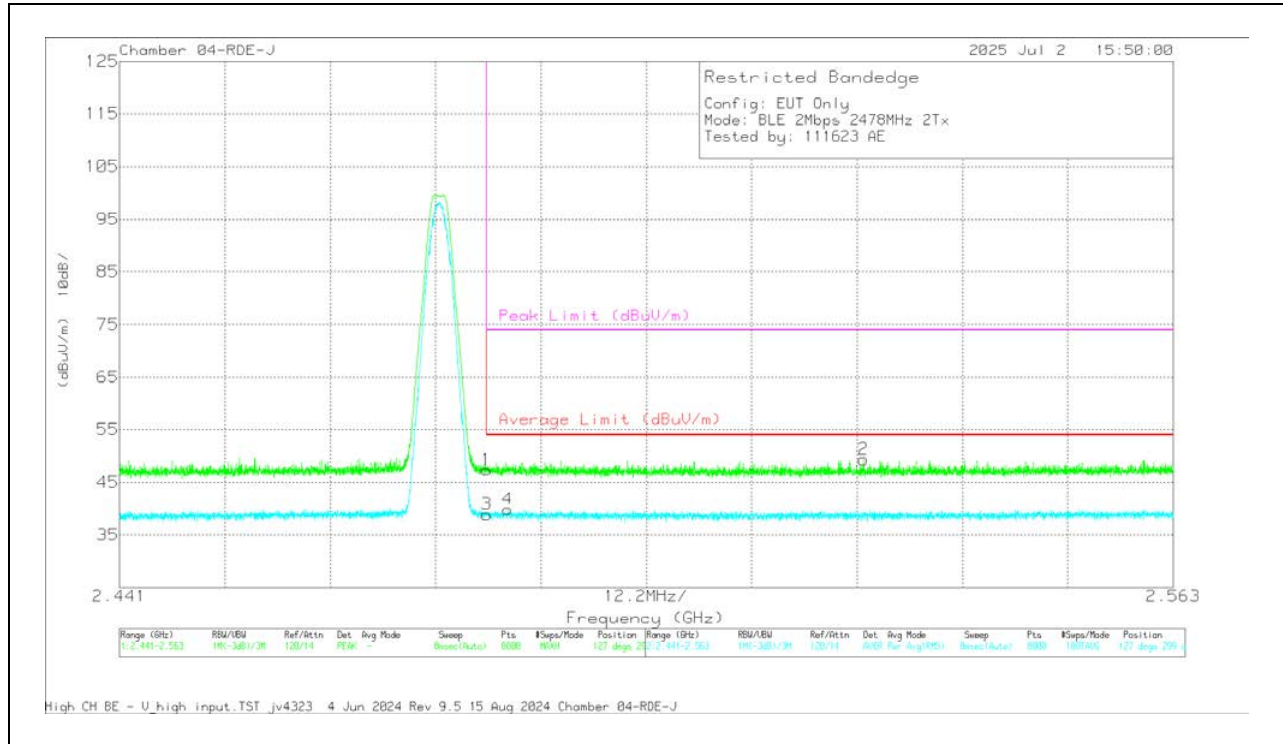


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	43.08	PK	32.4	-28.1	0	47.38	-	-	74	-26.62	127	299	V
2	2.527128	44.95	PK	32.5	-28.1	0	49.35	-	-	74	-24.65	127	299	V
3	* 2.4835	32.17	RMS	32.4	-28.1	2.45	38.92	54	-15.08	-	-	127	299	V
4	* 2.485932	33.01	RMS	32.5	-28.1	2.45	39.86	54	-14.14	-	-	127	299	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

10.2.17. LOW POWER BLE (HDT3)

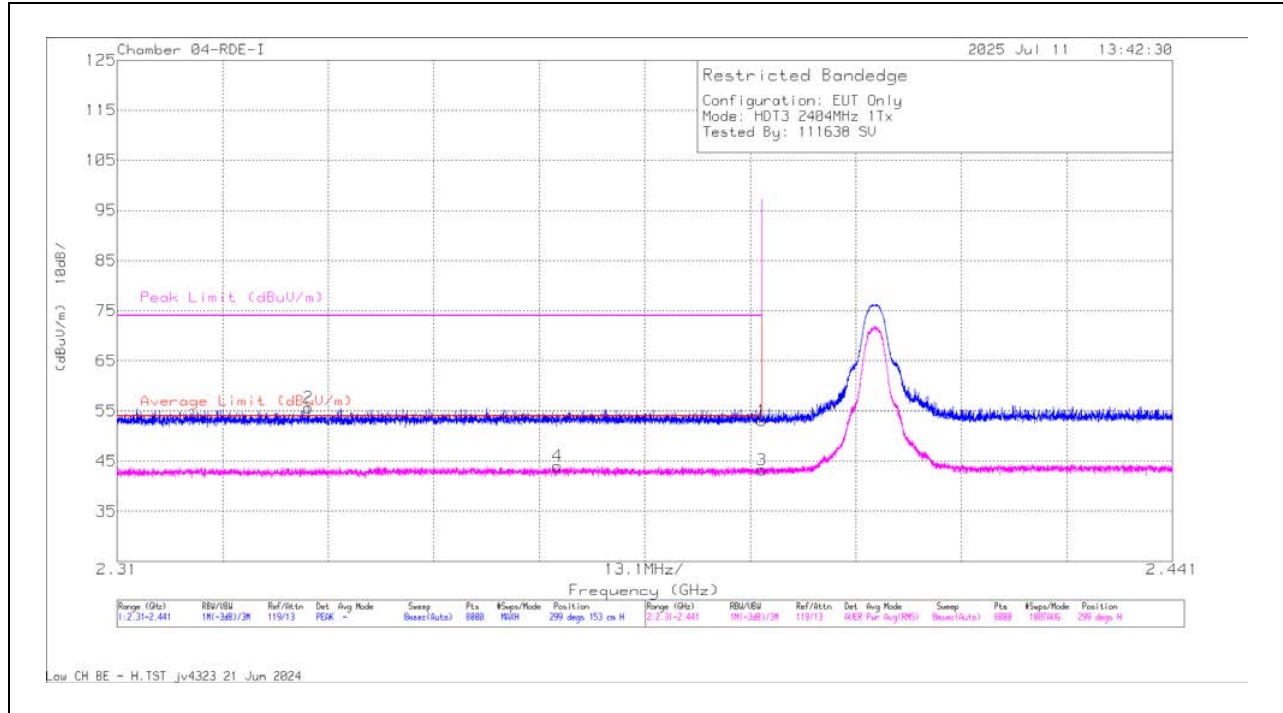ANT 4**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222740 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	41.52	Pk	31.8	-19.9	0	53.42	-	-	74	-20.58	79	294	V
2	* 2.367287	44.34	Pk	31.7	-19.7	0	56.34	-	-	74	-17.66	79	294	V
3	* 2.39	31.09	RMS	31.8	-19.9	.23	43.22	54	-10.78	-	-	79	294	V
4	* 2.386759	31.88	RMS	31.8	-19.8	.23	44.11	54	-9.89	-	-	79	294	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

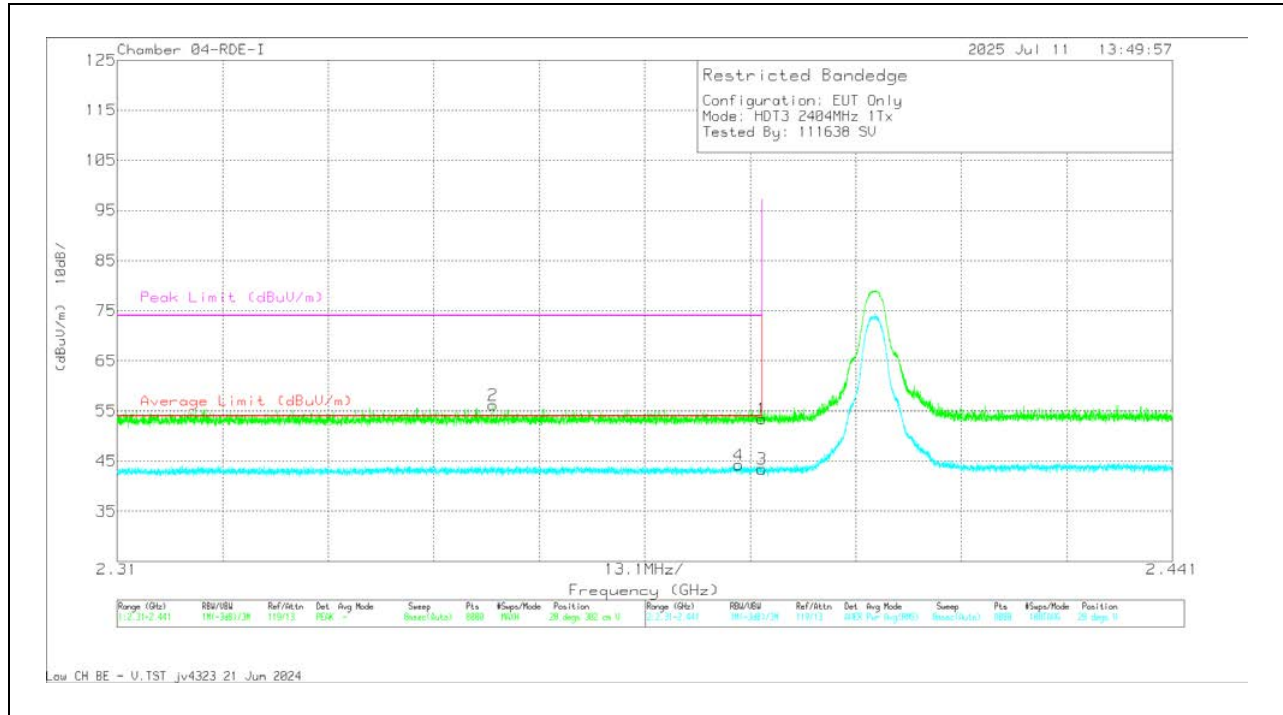


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222740 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	41.49	Pk	31.8	-19.9	0	53.39	-	-	74	-20.61	28	302	V
2	* 2.356674	44.16	Pk	31.7	-19.7	0	56.16	-	-	74	-17.84	28	302	V
3	* 2.39	31.28	RMS	31.8	-19.9	.23	43.41	54	-10.59	-	-	28	302	V
4	* 2.387185	31.96	RMS	31.8	-19.8	.23	44.19	54	-9.81	-	-	28	302	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

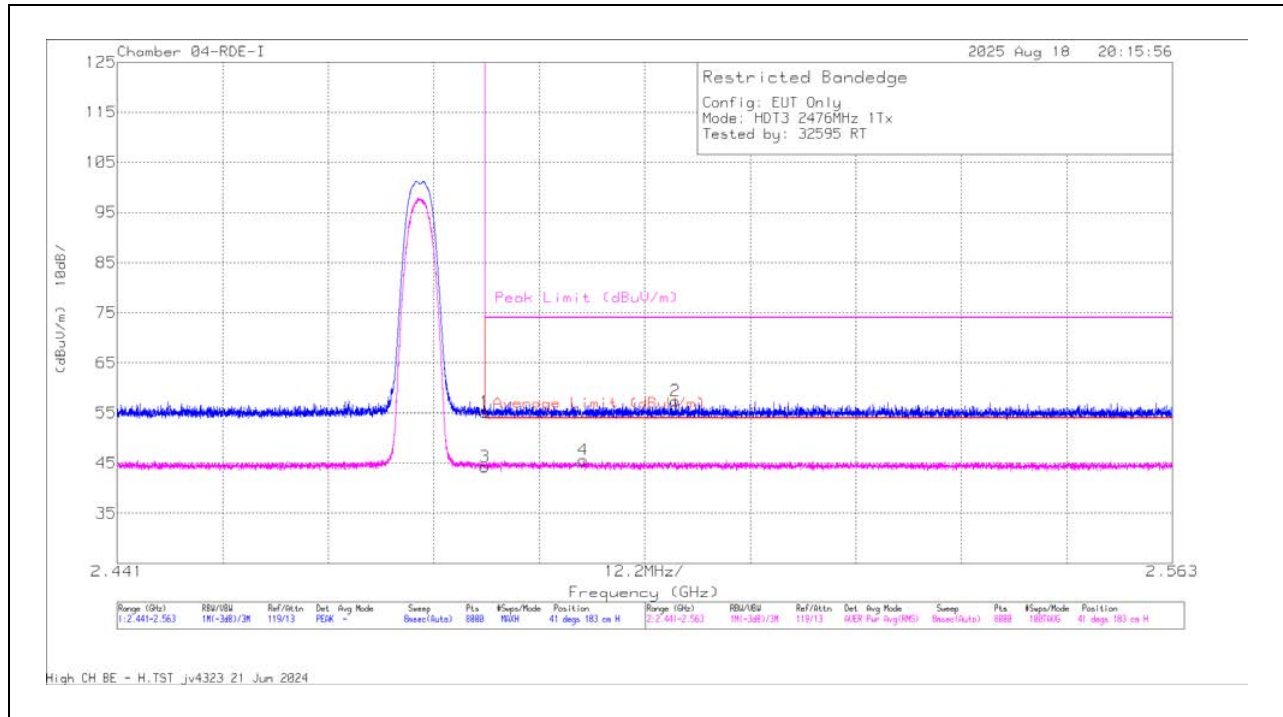BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222740 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	43.14	Pk	32.3	-20.3	0	55.14	-	-	74	-18.86	41	183	H
2	2.505562	45.4	Pk	32.4	-20.4	0	57.4	-	-	74	-16.6	41	183	H
3	* 2.4835	32.02	RMS	32.3	-20.3	.23	44.25	54	-9.75	-	-	41	183	H
4	* 2.49487	33.42	RMS	32.3	-20.3	.23	45.65	54	-8.35	-	-	41	183	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

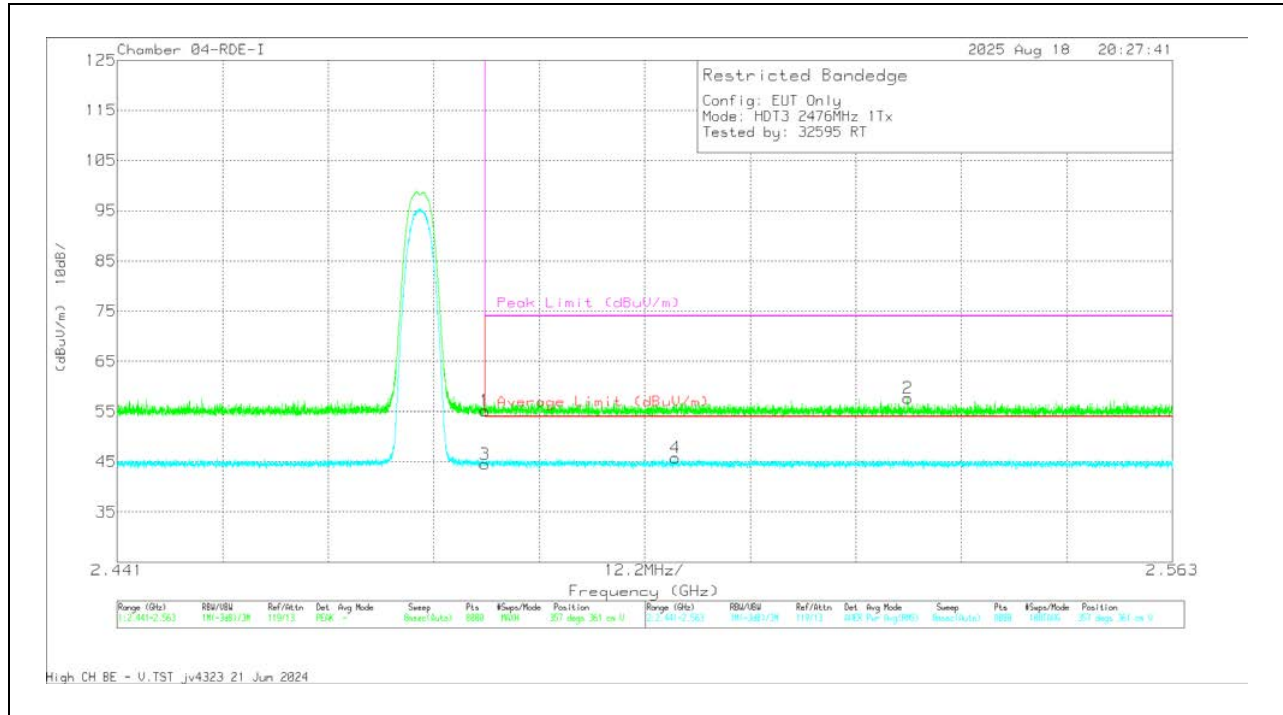


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222740 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	43.15	Pk	32.3	-20.3	0	55.15	-	-	74	-18.85	357	361	V
2	2.53239	45.62	Pk	32.4	-20.4	0	57.62	-	-	74	-16.38	357	361	V
3	* 2.4835	32.28	RMS	32.3	-20.3	.23	44.51	54	-9.49	-	-	357	361	V
4	2.505546	33.57	RMS	32.4	-20.4	.23	45.8	54	-8.2	-	-	357	361	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

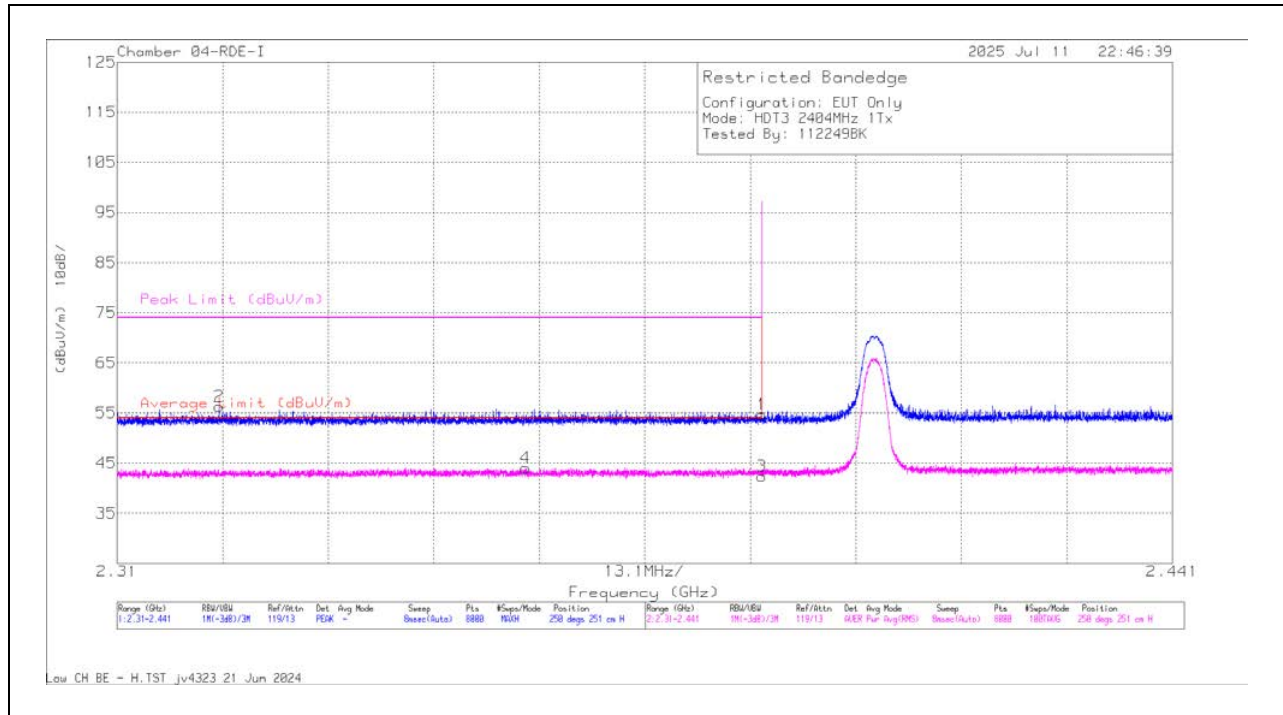ANT 3**BANDEGE (LOW CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222740 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.81	PK	31.8	-19.9	0	54.71	-	-	74	-19.29	250	251	H
2	* 2.322643	44.41	PK	31.6	-19.7	0	56.31	-	-	74	-17.69	250	251	H
3	* 2.39	30.19	RMS	31.8	-19.9	.23	42.32	54	-11.68	-	-	250	251	H
4	* 2.36067	31.81	RMS	31.7	-19.7	.23	44.04	54	-9.96	-	-	250	251	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

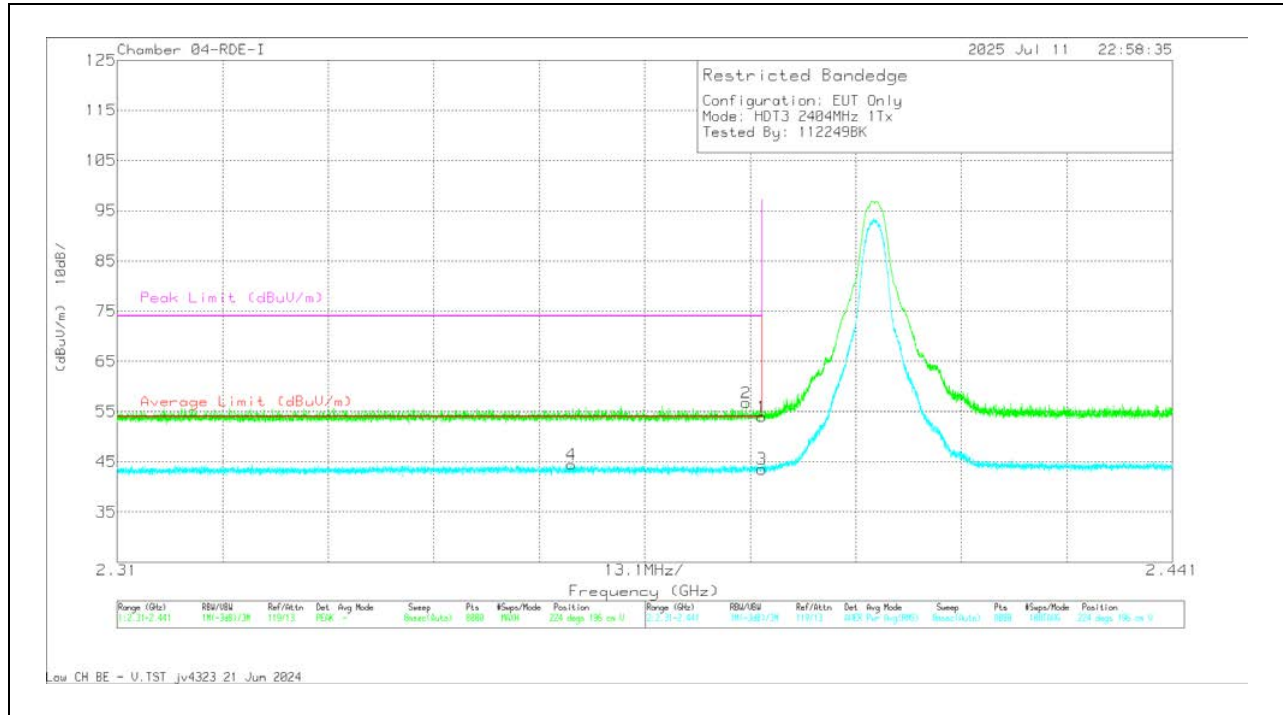


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222740 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.08	Pk	31.8	-19.9	0	53.98	-	-	74	-20.02	224	196	V
2	* 2.388102	44.73	Pk	31.8	-19.8	0	56.73	-	-	74	-17.27	224	196	V
3	* 2.39	31.42	RMS	31.8	-19.9	.23	43.55	54	-10.45	-	-	224	196	V
4	* 2.366402	32.2	RMS	31.7	-19.7	.23	44.43	54	-9.57	-	-	224	196	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

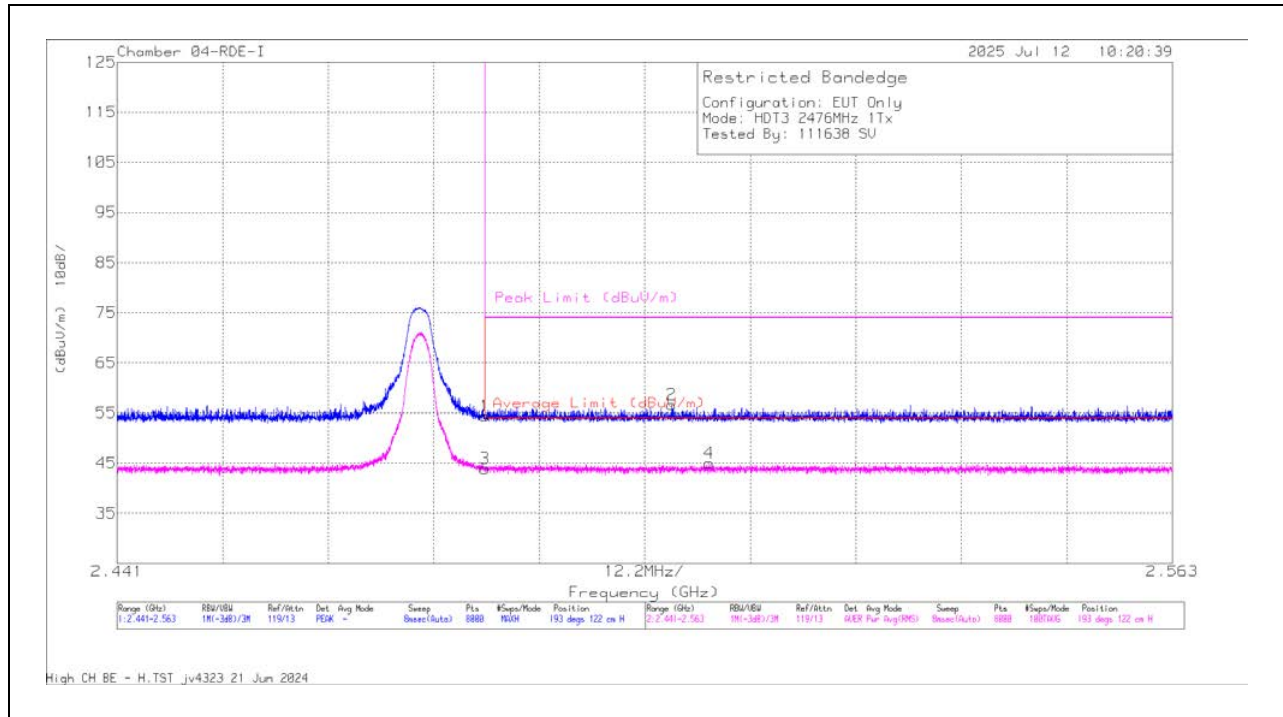BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222740 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	42.37	Pk	32.3	-20.3	0	54.37	-	-	74	-19.63	193	122	H
2	2.505119	44.62	Pk	32.4	-20.4	0	56.62	-	-	74	-17.38	193	122	H
3	* 2.4835	31.65	RMS	32.3	-20.3	.23	43.88	54	-10.12	-	-	193	122	H
4	2.509436	32.73	RMS	32.4	-20.4	.23	44.96	54	-9.04	-	-	193	122	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

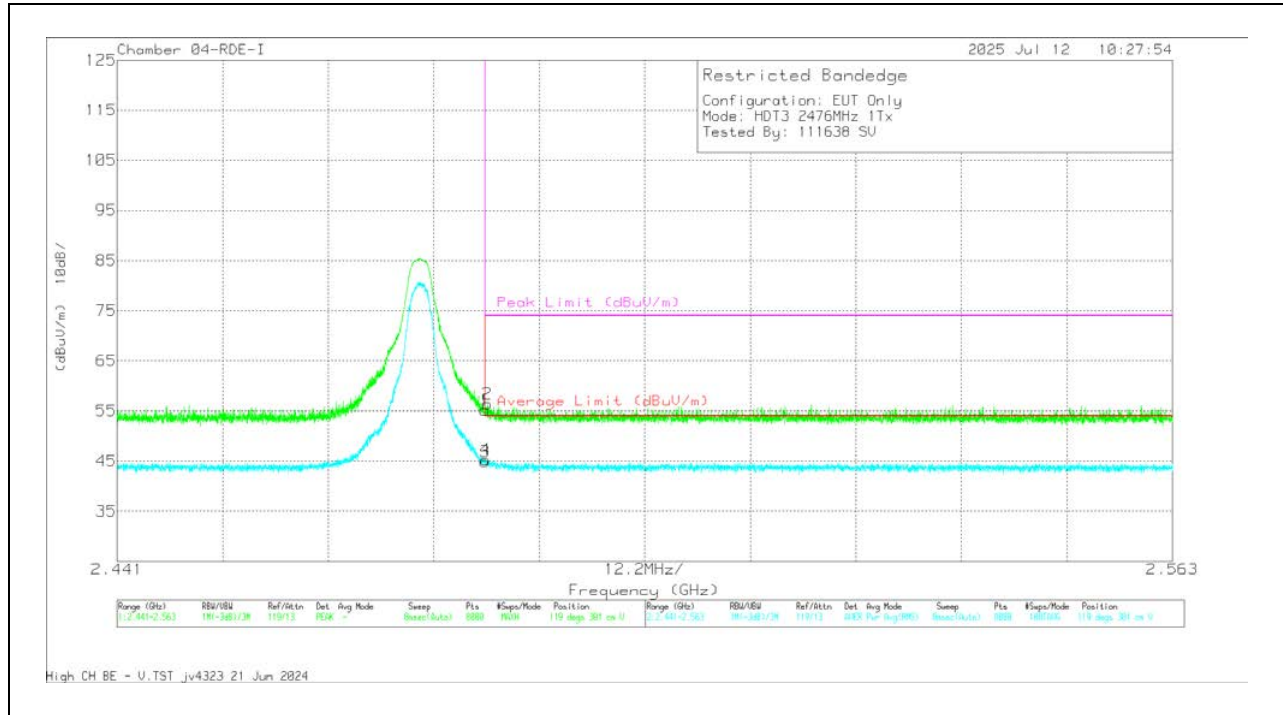

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222740 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	43.21	Pk	32.3	-20.3	0	55.21	-	-	74	-18.79	119	301	V
2	* 2.483782	44.43	Pk	32.3	-20.3	0	56.43	-	-	74	-17.57	119	301	V
3	* 2.4835	32.65	RMS	32.3	-20.3	.23	44.88	54	-9.12	-	-	119	301	V
4	* 2.483584	33.03	RMS	32.3	-20.3	.23	45.26	54	-8.74	-	-	119	301	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK - Peak detector

RMS - RMS detection

10.2.18. LOW POWER BLE TXBF (HDT3)

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

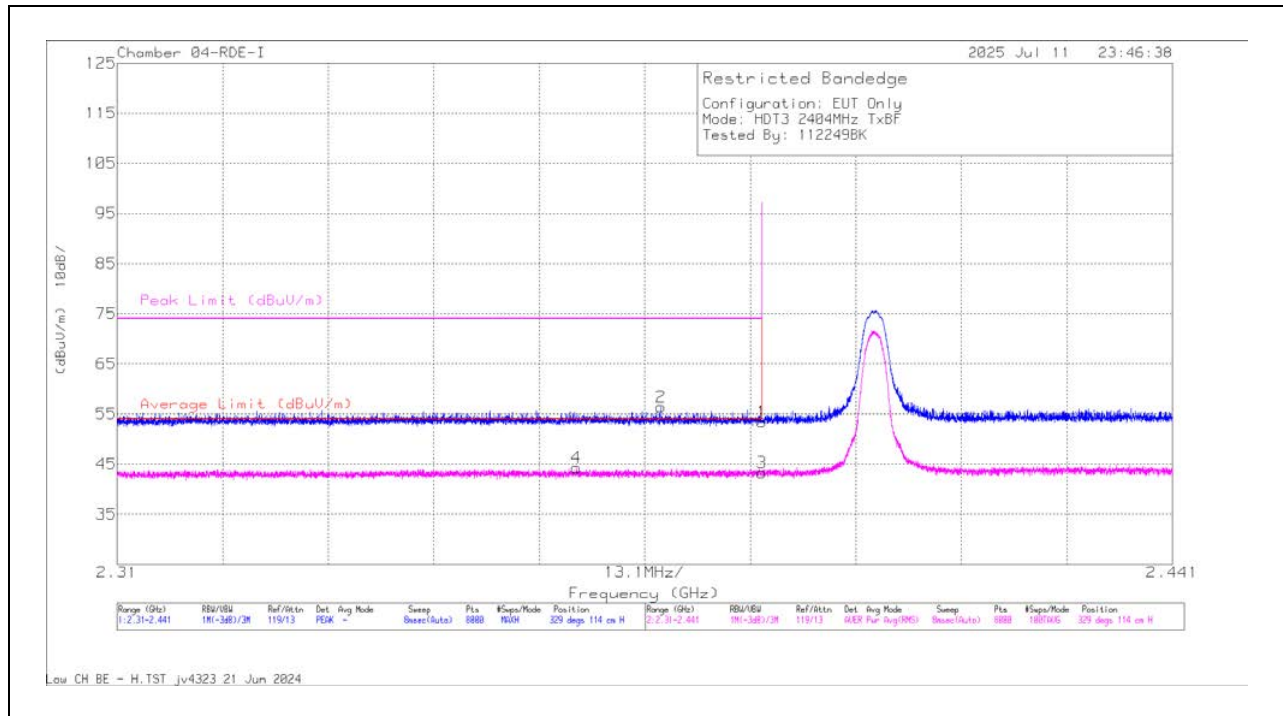


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222740 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	41.49	Pk	31.8	-19.9	0	53.39	-	-	74	-20.61	329	114	H
2	* 2.377506	44.36	Pk	31.7	-19.7	0	56.36	-	-	74	-17.64	329	114	H
3	* 2.39	31.07	RMS	31.8	-19.9	.23	43.19	54	-10.81	-	-	329	114	H
4	* 2.367025	32.01	RMS	31.7	-19.7	.23	44.24	54	-9.76	-	-	329	114	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

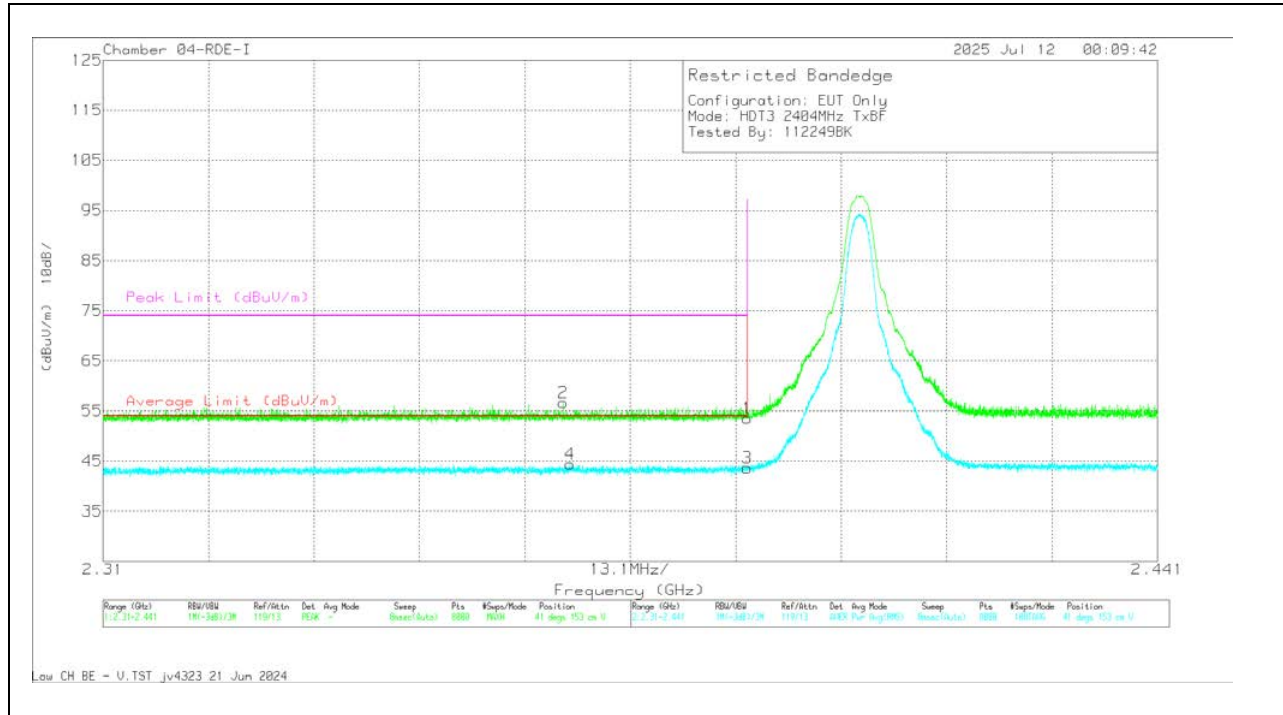


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222740 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	41.68	Pk	31.8	-19.9	0	53.58	-	-	74	-20.42	41	153	V
2	* 2.367156	44.67	Pk	31.7	-19.7	0	56.67	-	-	74	-17.33	41	153	V
3	* 2.39	31.54	RMS	31.8	-19.9	.23	43.67	54	-10.33	-	-	41	153	V
4	* 2.36804	32.11	RMS	31.7	-19.7	.23	44.34	54	-9.66	-	-	41	153	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

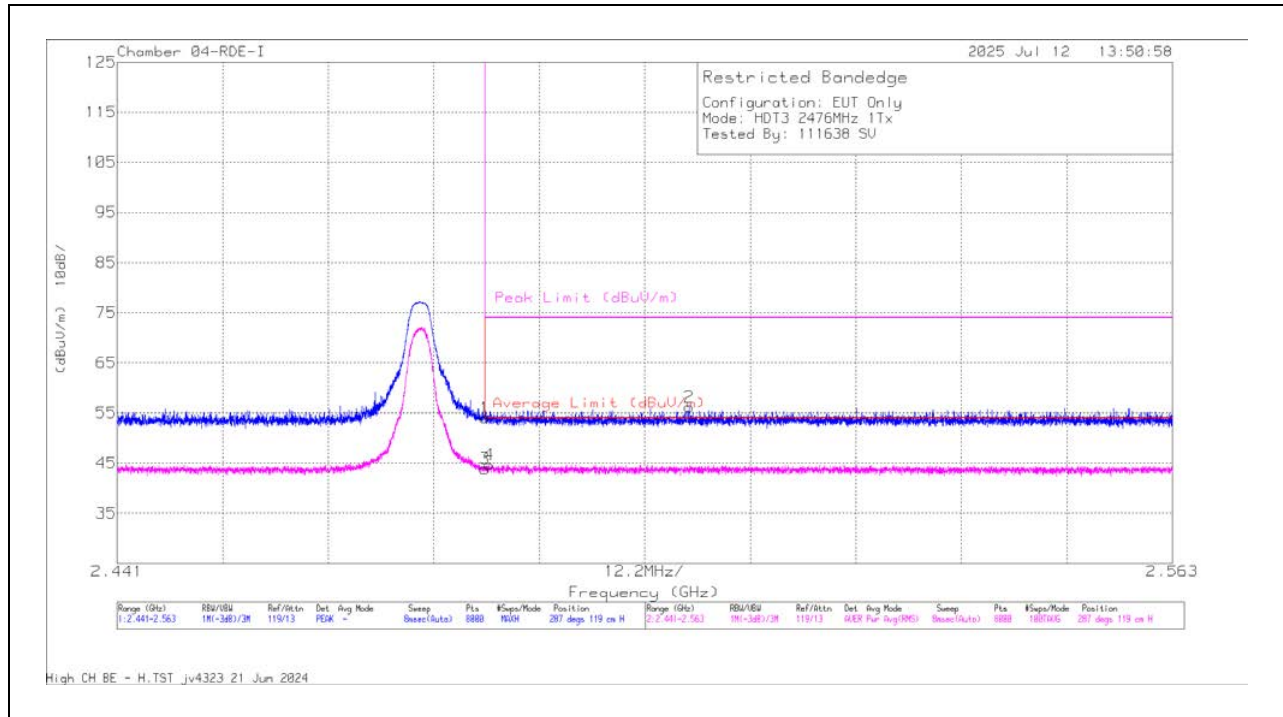BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222740 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	42.01	Pk	32.3	-20.3	0	54.01	-	-	74	-19.99	287	119	H
2	2.507102	44.15	Pk	32.4	-20.4	0	56.15	-	-	74	-17.85	287	119	H
3	* 2.4835	31.6	RMS	32.3	-20.3	.23	43.83	54	-10.17	-	-	287	119	H
4	* 2.483995	32.45	RMS	32.3	-20.3	.23	44.68	54	-9.32	-	-	287	119	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

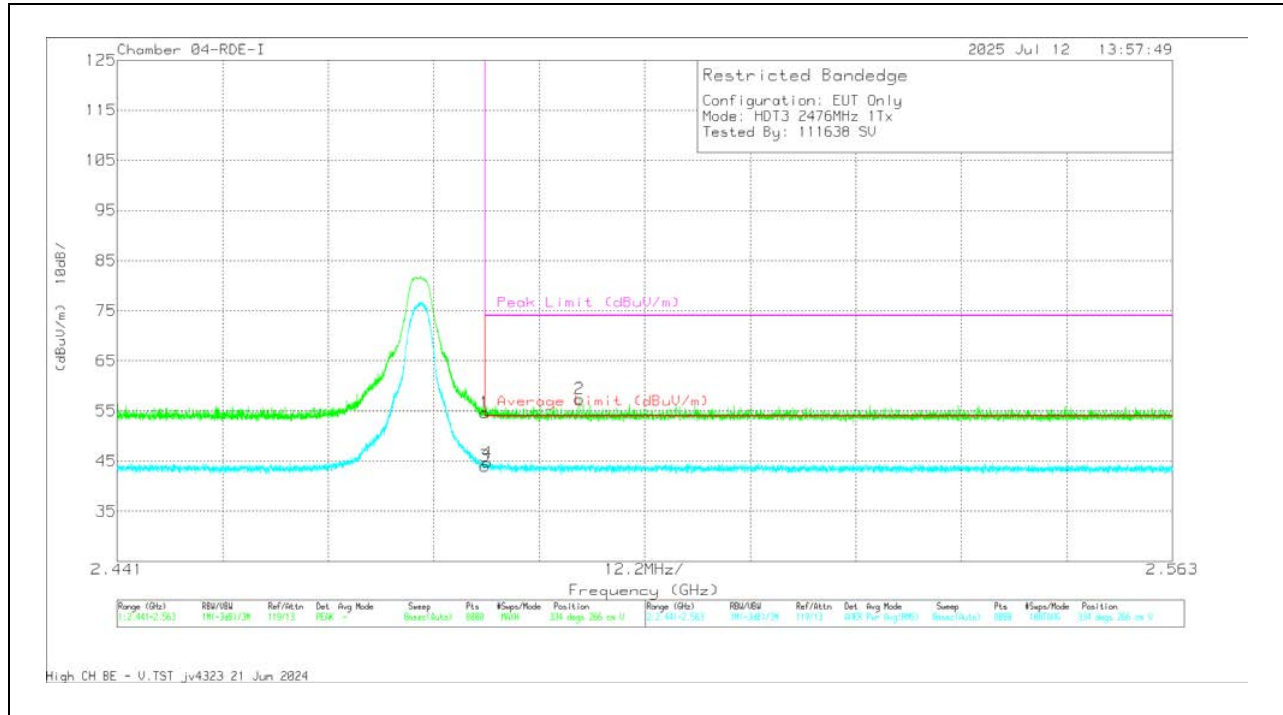


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222740 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	42.63	Pk	32.3	-20.3	0	54.63	-	-	74	-19.37	334	266	V
2	* 2.494474	45.41	Pk	32.3	-20.3	0	57.41	-	-	74	-16.59	334	266	V
3	* 2.4835	31.8	RMS	32.3	-20.3	.23	44.03	54	-9.97	-	-	334	266	V
4	* 2.483782	32.45	RMS	32.3	-20.3	.23	44.68	54	-9.32	-	-	334	266	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

10.2.19. LOW POWER BLE (HDT8)

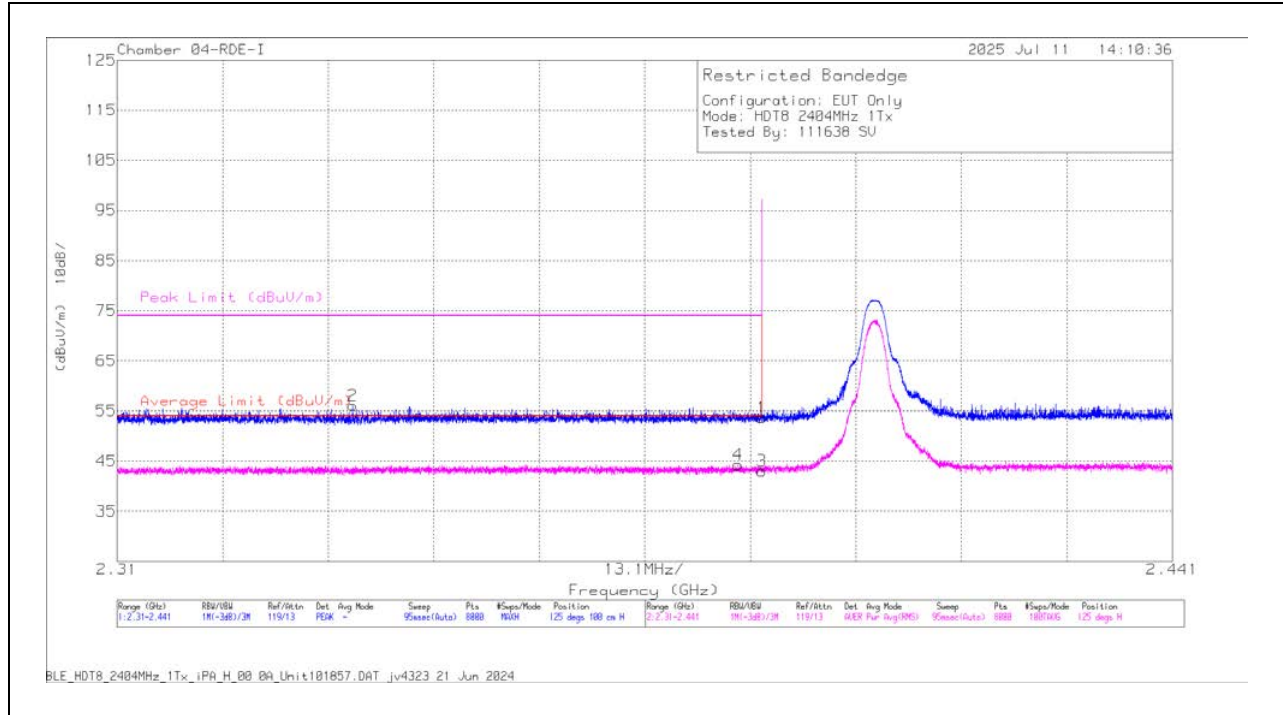ANT 4**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222740 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	41.76	Pk	31.8	-19.9	0	53.66	-	-	74	-20.34	125	100	H
2	* 2.3392	44.19	Pk	31.6	-19.7	0	56.09	-	-	74	-17.91	125	100	H
3	* 2.39	30.89	RMS	31.8	-19.9	.26	43.05	54	-10.95	-	-	125	100	H
4	* 2.387103	32.06	RMS	31.8	-19.8	.26	44.32	54	-9.68	-	-	125	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

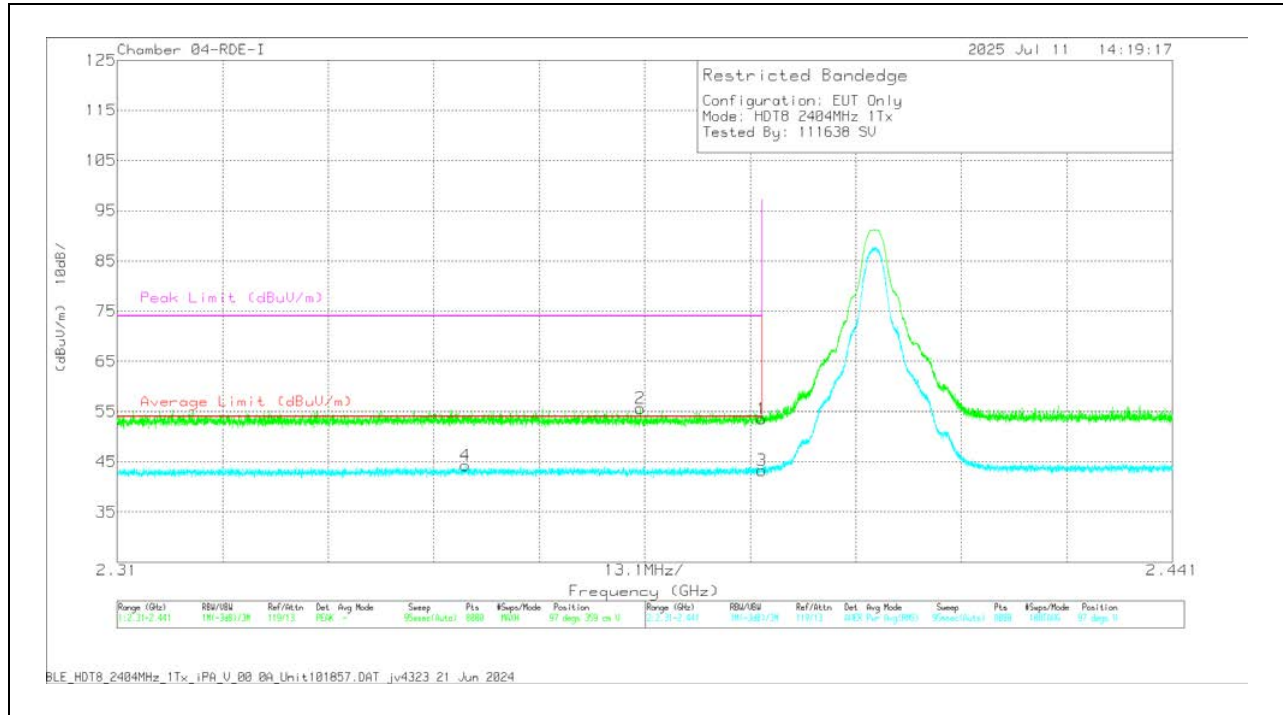


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222740 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	41.59	Pk	31.8	-19.9	0	53.49	-	-	74	-20.51	97	359	V
2	* 2.374935	43.79	Pk	31.7	-19.8	0	55.69	-	-	74	-18.31	97	359	V
3	* 2.39	31.07	RMS	31.8	-19.9	.26	43.23	54	-10.77	-	-	97	359	V
4	* 2.353268	32	RMS	31.7	-19.7	.26	44.26	54	-9.74	-	-	97	359	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

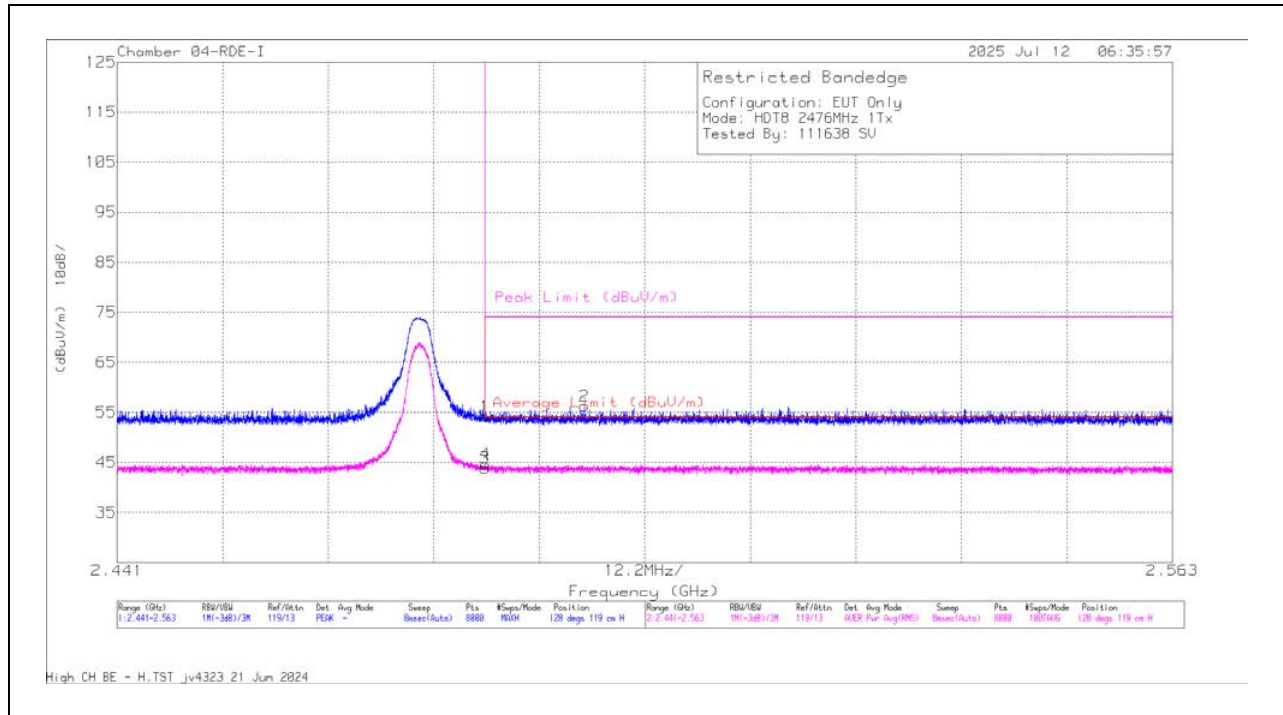BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222740 ACF (dB/m)	Ampl/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	42.23	Pk	32.3	-20.3	0	54.23	-	-	74	-19.77	128	119	H
2	* 2.495007	44.23	Pk	32.3	-20.3	0	56.23	-	-	74	-17.77	128	119	H
3	* 2.4835	31.68	RMS	32.3	-20.3	.26	43.94	54	-10.06	-	-	128	119	H
4	* 2.483568	32.4	RMS	32.3	-20.3	.26	44.66	54	-9.34	-	-	128	119	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

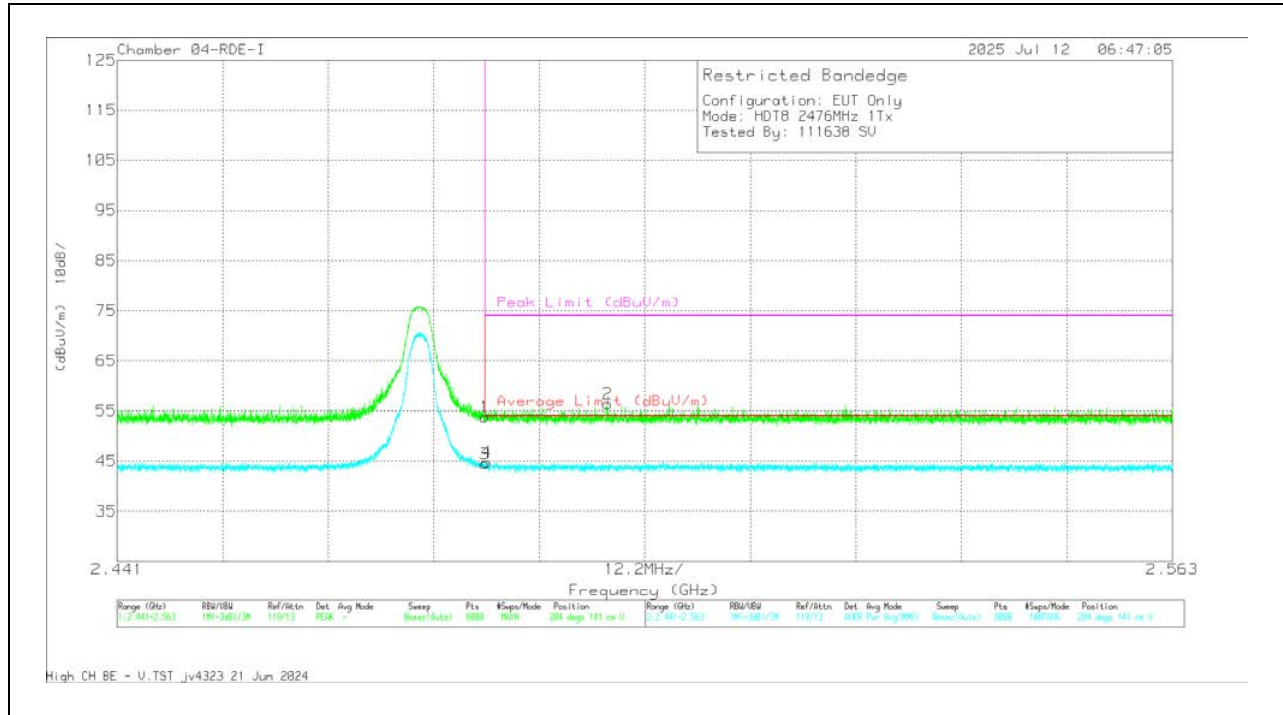


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222740 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	41.8	Pk	32.3	-20.3	0	53.8	-	-	74	-20.2	204	141	V
2	* 2.497737	44.43	Pk	32.3	-20.3	0	56.43	-	-	74	-17.57	204	141	V
3	* 2.4835	32.2	RMS	32.3	-20.3	.26	44.46	54	-9.54	-	-	204	141	V
4	* 2.483736	32.56	RMS	32.3	-20.3	.26	44.82	54	-9.18	-	-	204	141	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

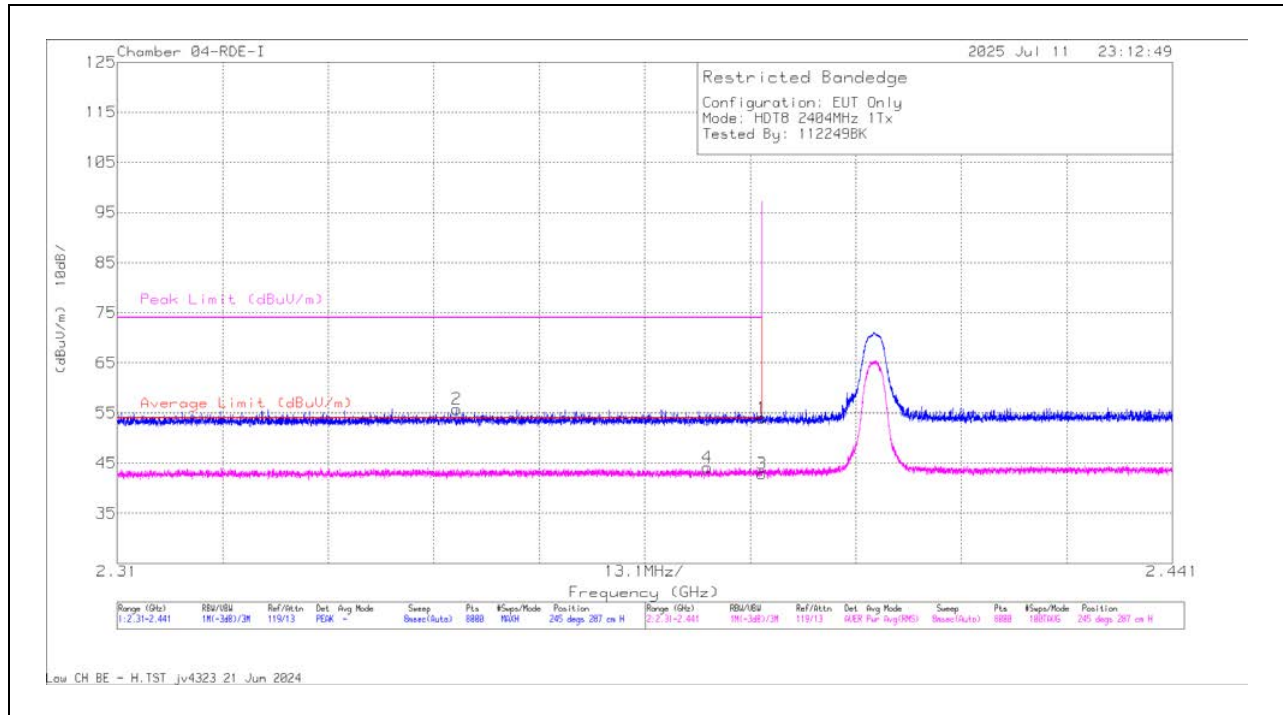ANT 3**BANDEGE (LOW CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222740 ACF (dBm)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.16	Pk	31.8	-19.9	0	54.06	-	-	74	-19.94	245	287	H
2	* 2.352171	43.79	Pk	31.7	-19.7	0	55.79	-	-	74	-18.21	245	287	H
3	* 2.39	30.73	RMS	31.8	-19.9	.26	42.89	54	-11.11	-	-	245	287	H
4	* 2.383254	31.96	RMS	31.7	-19.8	.26	44.12	54	-9.88	-	-	245	287	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

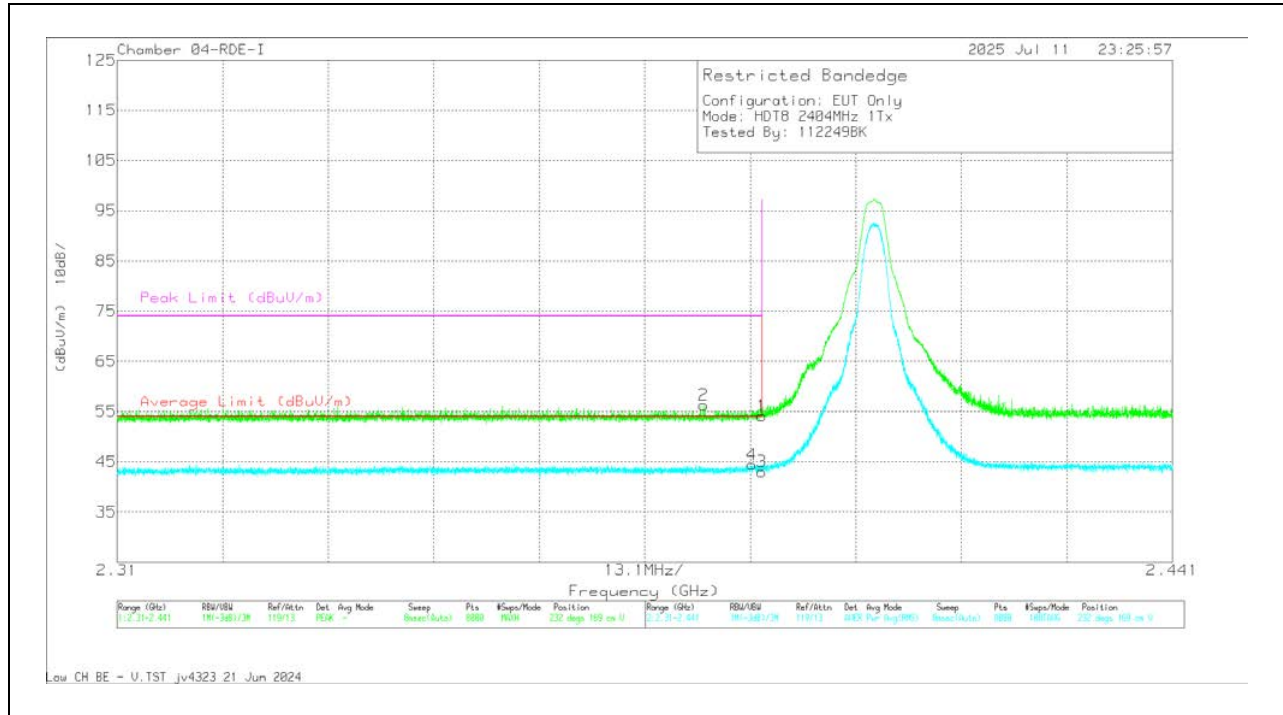


Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	222740 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.24	Pk	31.8	-19.9	0	54.14	-	-	74	-19.86	232	169	V
2	* 2.382779	44.39	Pk	31.7	-19.8	0	56.29	-	-	74	-17.71	232	169	V
3	* 2.39	30.89	RMS	31.8	-19.9	.26	43.05	54	-10.95	-	-	232	169	V
4	* 2.388757	32.19	RMS	31.8	-19.8	.26	44.45	54	-9.55	-	-	232	169	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

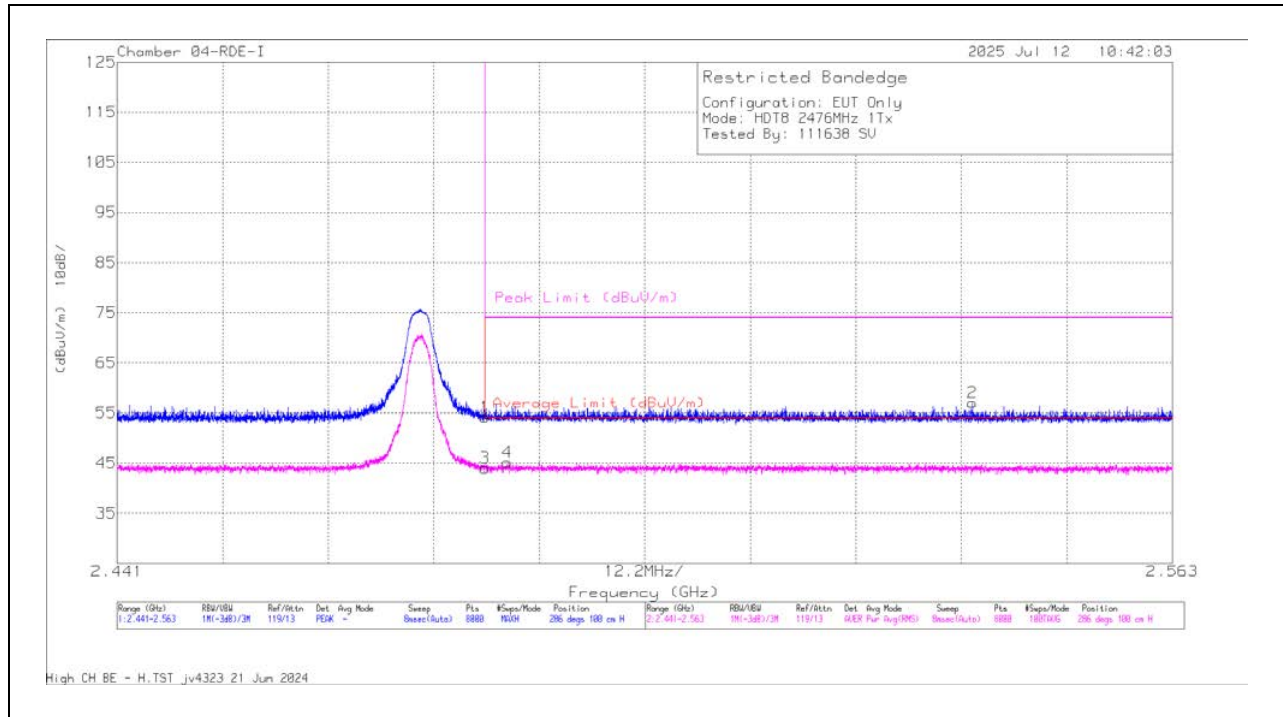BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222740 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	42.14	PK	32.3	-20.3	0	54.14	-	-	74	-19.86	286	100	H
3	* 2.4835	31.79	RMS	32.3	-20.3	.26	44.05	54	-9.95	-	-	286	100	H
4	* 2.486131	32.8	RMS	32.3	-20.2	.26	45.16	54	-8.84	-	-	286	100	H
2	*2.539848	45.19	PK	32.4	-20.5	0	57.09	-	-	74	-16.91	286	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

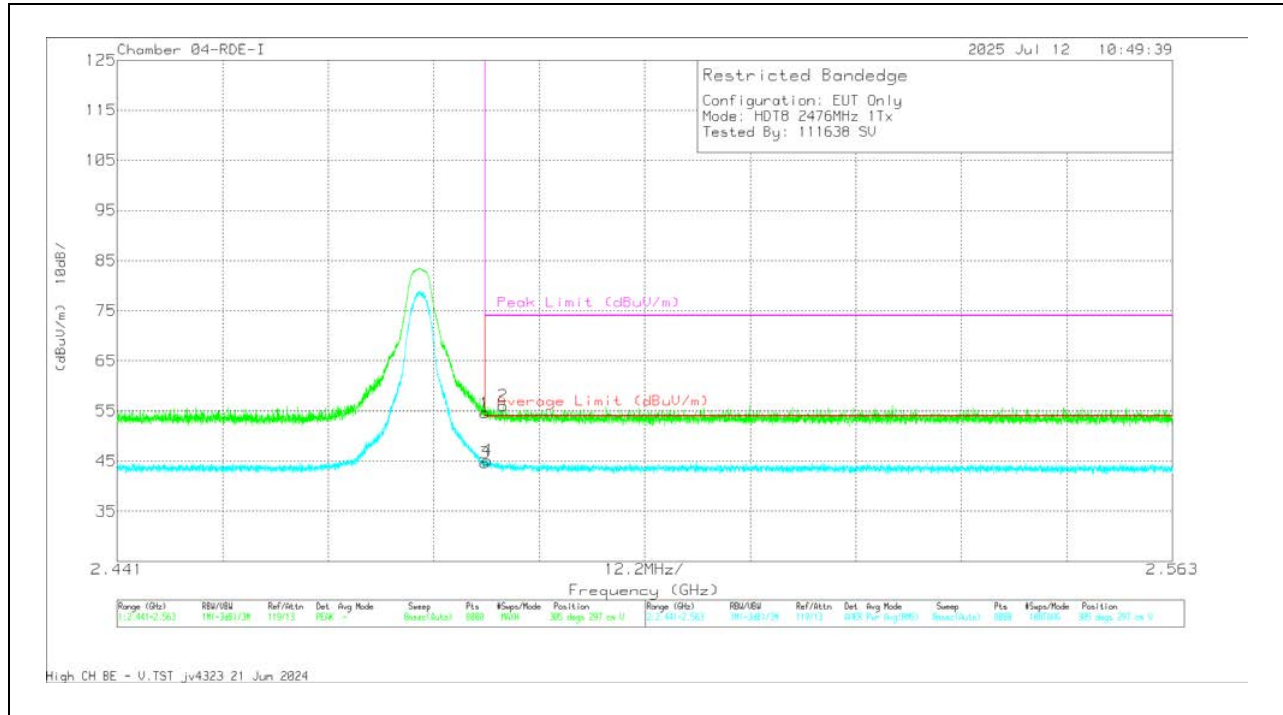

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222740 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	42.6	Pk	32.3	-20.3	0	54.6	-	-	74	-19.4	305	297	V
2	* 2.485597	43.97	Pk	32.3	-20.2	0	56.07	-	-	74	-17.93	305	297	V
3	* 2.4835	32.42	RMS	32.3	-20.3	.26	44.68	54	-9.32	-	-	305	297	V
4	* 2.483828	32.92	RMS	32.3	-20.3	.26	45.18	54	-8.82	-	-	305	297	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

10.2.20. LOW POWER BLE TXBF (HDT8)

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

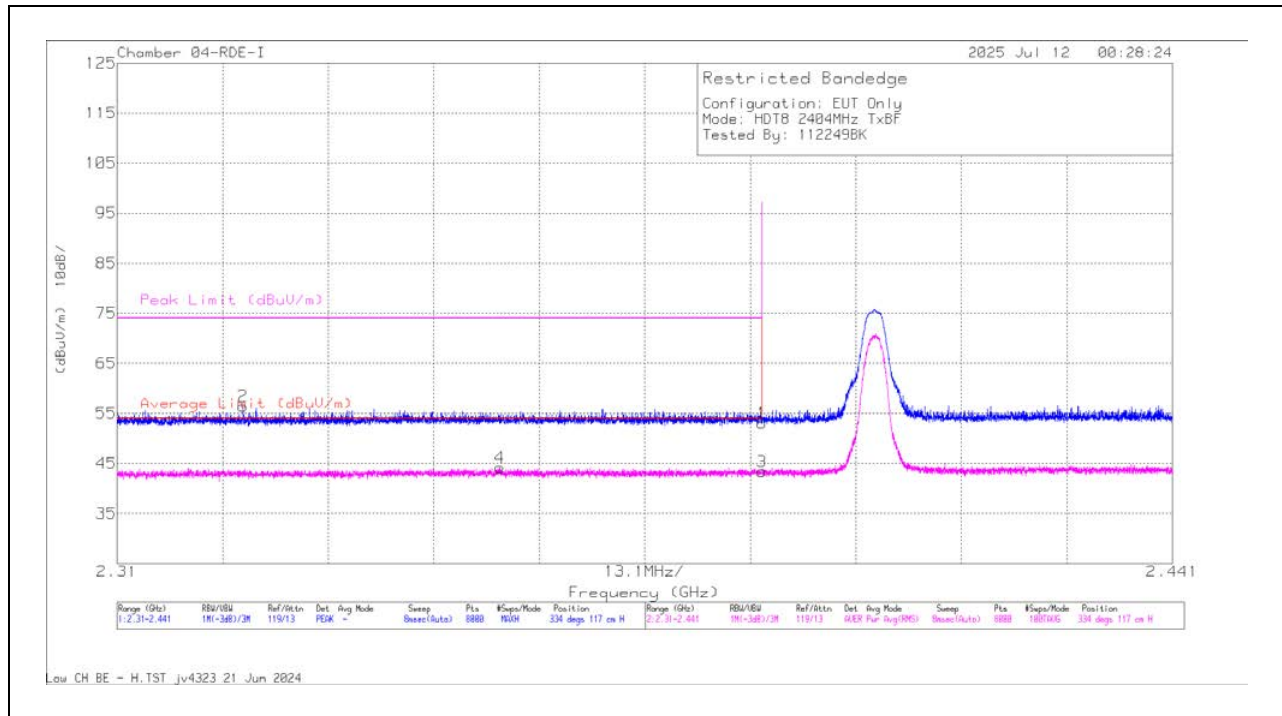


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222740 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	41.17	Pk	31.8	-19.9	0	53.07	-	-	74	-20.93	334	117	H
2	* 2.32564	44.54	Pk	31.6	-19.7	0	56.44	-	-	74	-17.56	334	117	H
3	* 2.39	31.18	RMS	31.8	-19.9	.26	43.34	54	-10.66	-	-	334	117	H
4	* 2.357493	31.86	RMS	31.7	-19.7	.26	44.12	54	-9.88	-	-	334	117	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

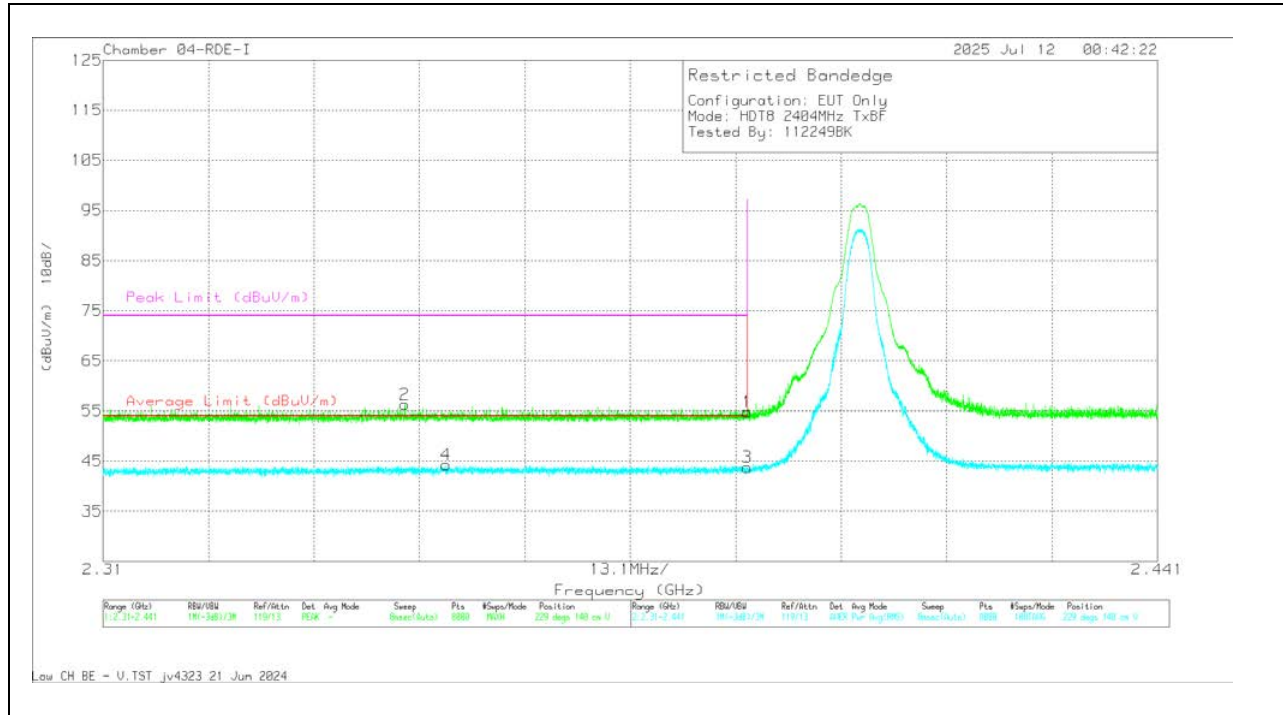


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222740 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.84	Pk	31.8	-19.9	0	54.74	-	-	74	-19.26	229	140	V
2	* 2.347503	44.32	Pk	31.7	-19.7	0	56.32	-	-	74	-17.68	229	140	V
3	* 2.39	31.57	RMS	31.8	-19.9	.26	43.73	54	-10.27	-	-	229	140	V
4	* 2.352613	31.97	RMS	31.7	-19.7	.26	44.23	54	-9.77	-	-	229	140	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

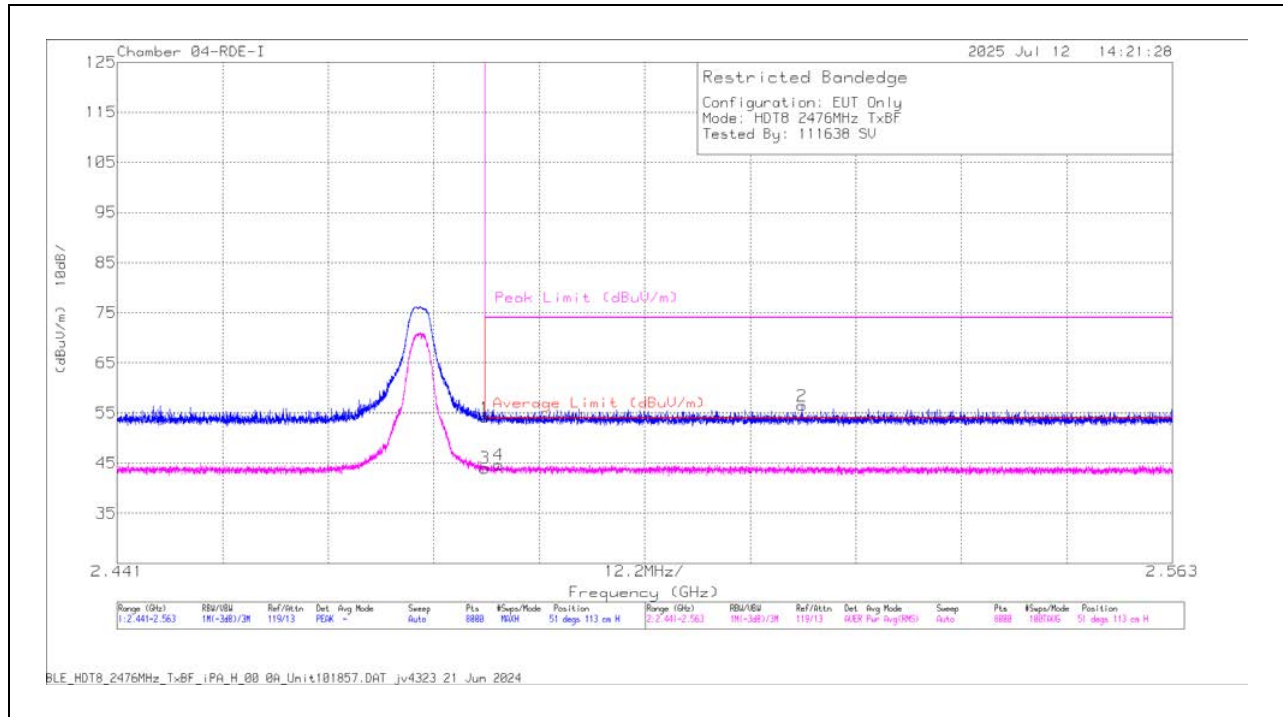BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222740 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	42.1	Pk	32.3	-20.3	0	54.1	-	-	74	-19.9	51	113	H
2	2.520143	44.47	Pk	32.4	-20.4	0	56.47	-	-	74	-17.53	51	113	H
3	* 2.4835	31.76	RMS	32.3	-20.3	.26	44.02	54	-9.98	-	-	51	113	H
4	* 2.485124	32.32	RMS	32.3	-20.2	.26	44.68	54	-9.32	-	-	51	113	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT


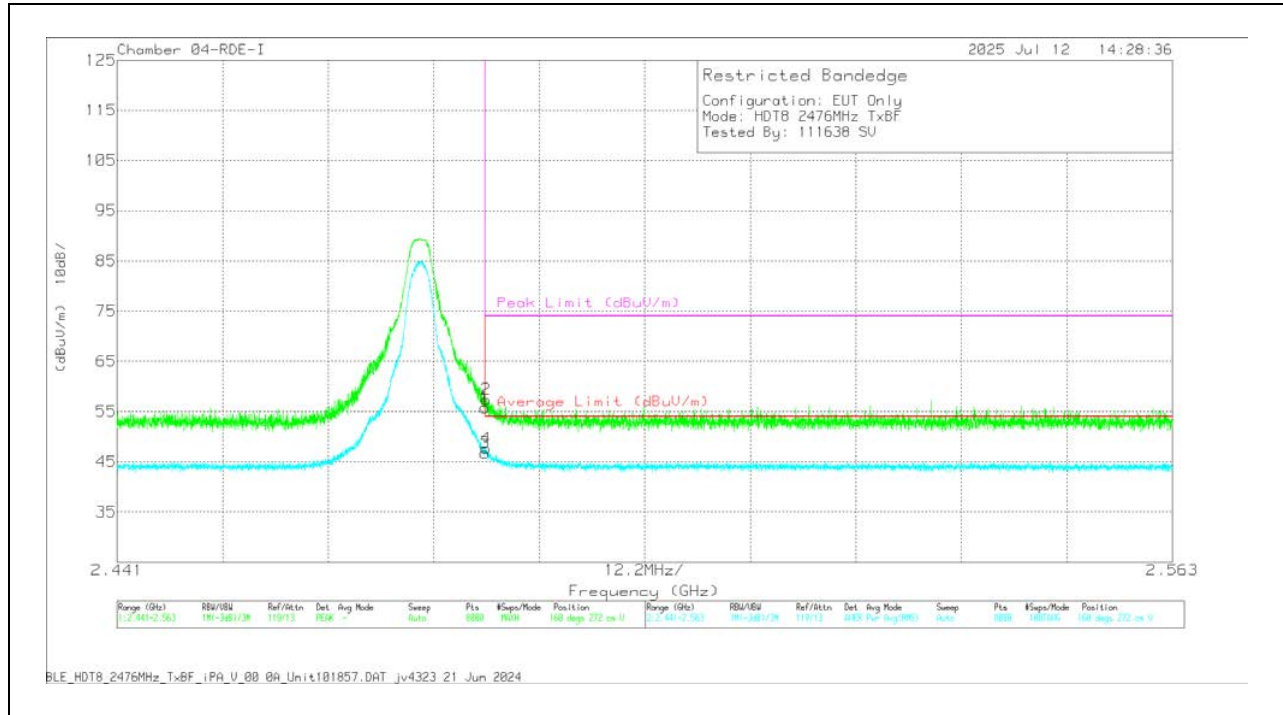


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222740 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	43.83	Pk	32.3	-20.3	0	55.83	-	-	74	-18.17	160	272	V
2	* 2.483629	45.44	Pk	32.3	-20.3	0	57.44	-	-	74	-16.56	160	272	V
3	* 2.4835	34.53	RMS	32.3	-20.3	.26	46.79	54	-7.21	-	-	160	272	V
4	* 2.483675	35.34	RMS	32.3	-20.3	.26	47.6	54	-6.4	-	-	160	272	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

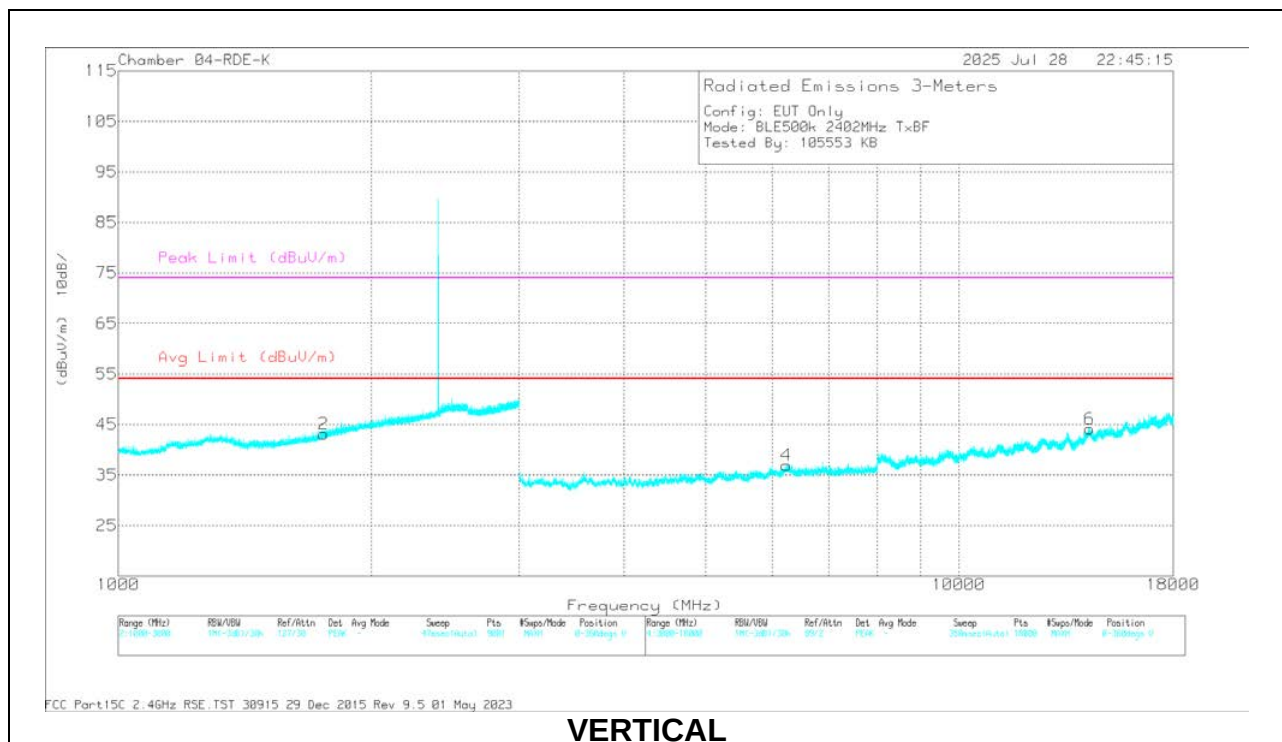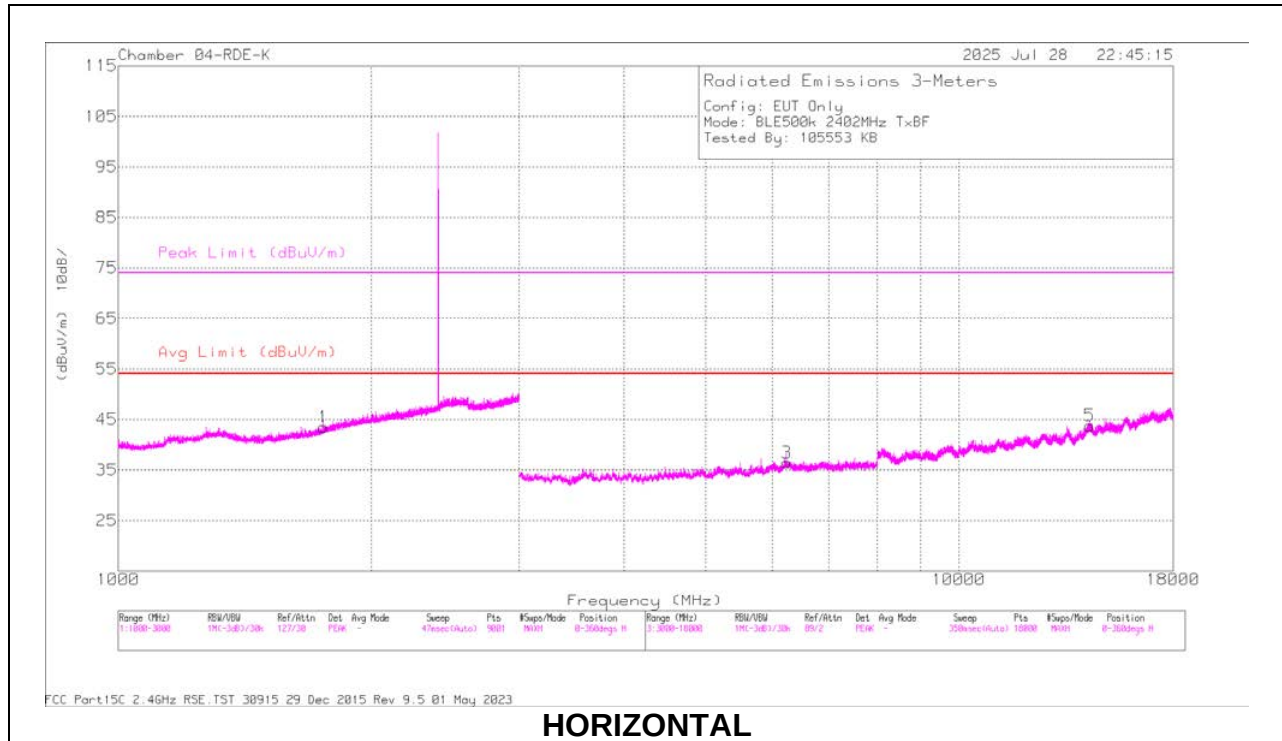10.2.21. **WORST CASE HARMONICS AND SPURIOUS EMISSIONS****LELR2****LOW CHANNEL RESULTS**

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	206808 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1752.715	59.74	PK2	29.7	-36.1	0	53.34	-	-	-	-	360	200	H
2	1754.728	59.95	PK2	29.7	-36.1	0	53.55	-	-	-	-	360	200	V


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	206808 ACF (dB/m)	Amp/Cbl/Fitr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	6243.117	49.89	PK2	35.5	-38.3	0	47.09	-	-	-	-	360	200	H
4	6238.206	48.98	PK2	35.5	-38.3	0	46.18	-	-	-	-	360	101	V
5	14320.529	48.17	PK2	39.2	-34.7	0	52.67	-	-	-	-	360	200	H
6	14322.346	48.29	PK2	39.2	-34.7	0	52.79	-	-	-	-	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL RESULTS

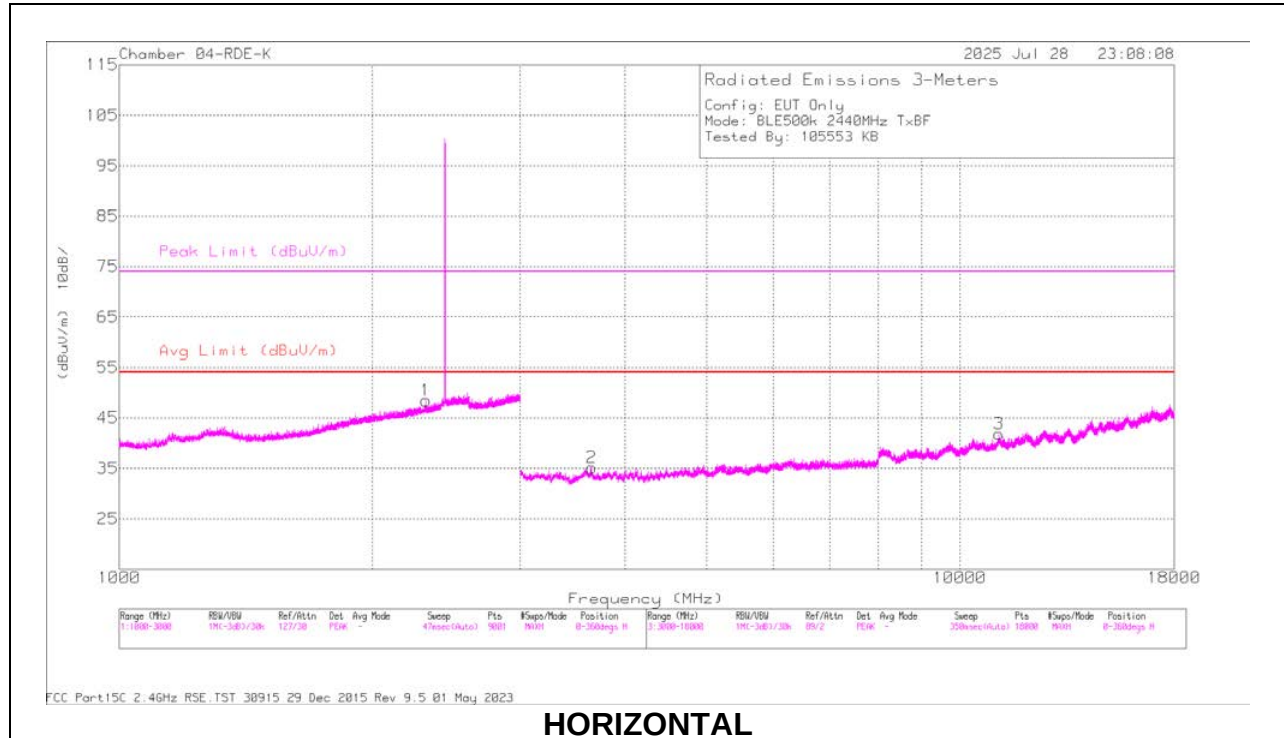

HORIZONTAL

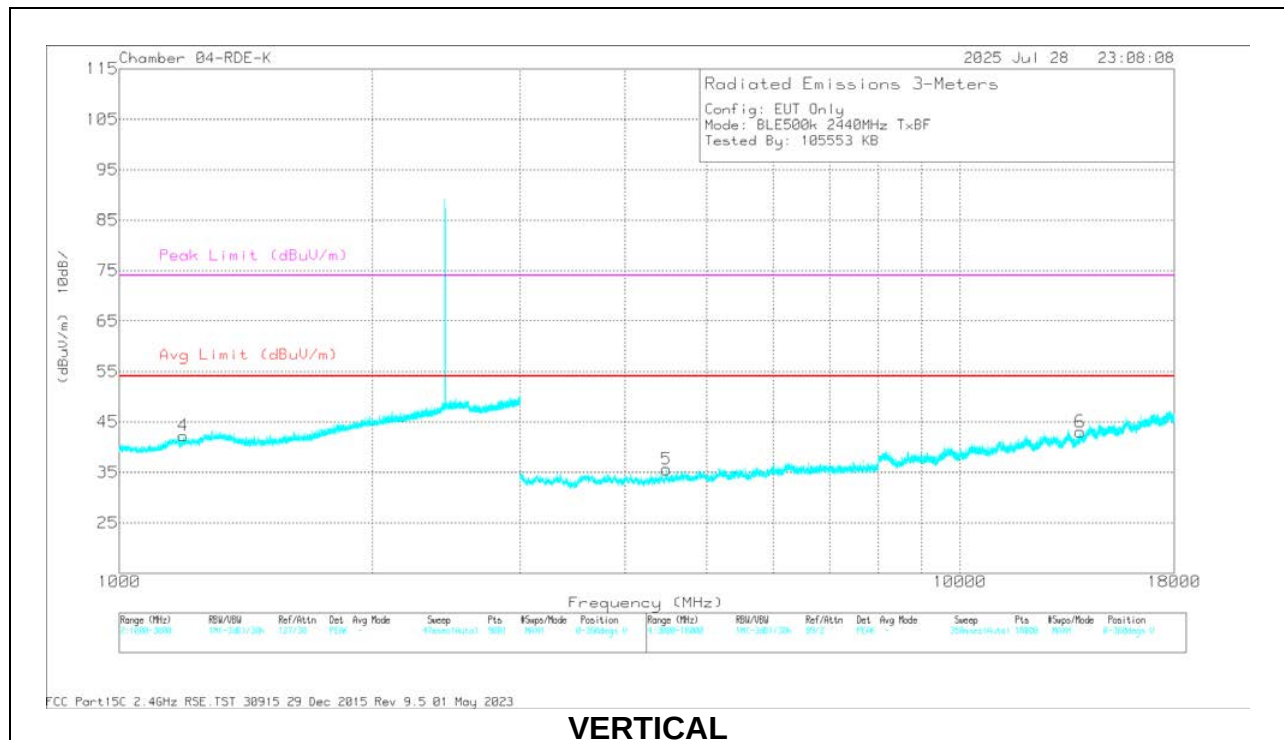

VERTICAL

RADIATED EMISSIONS



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	206808 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2316.969	60.05	PK2	32	-34.9	0	57.15	-	-	74	-16.85	360	199	H
	* 2318.094	48.34	MAv1	32	-34.9	.42	45.86	54	-8.14	-	-	360	199	H
2	* 3647.183	52.51	PK2	33.5	-40.9	0	45.11	-	-	74	-28.89	360	199	H
	* 3645.692	40.41	MAv1	33.5	-40.9	.42	33.43	54	-20.57	-	-	360	199	H
3	* 11130.317	49.18	PK2	37.9	-36	0	51.08	-	-	74	-22.92	360	199	H
	* 11132.419	37.38	MAv1	37.9	-35.9	.42	39.8	54	-14.2	-	-	360	199	H
4	* 11192.05	60.12	PK2	28.4	-36.7	0	51.82	-	-	74	-22.18	360	101	V
	* 1191.94	48.2	MAv1	28.4	-36.7	.42	40.32	54	-13.68	-	-	360	101	V
5	4477.894	51.59	PK2	34	-41.3	0	44.29	-	-	-	-	360	199	V
6	13913.912	46.82	PK2	38.9	-34.4	0	51.32	-	-	-	-	360	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL RESULTS

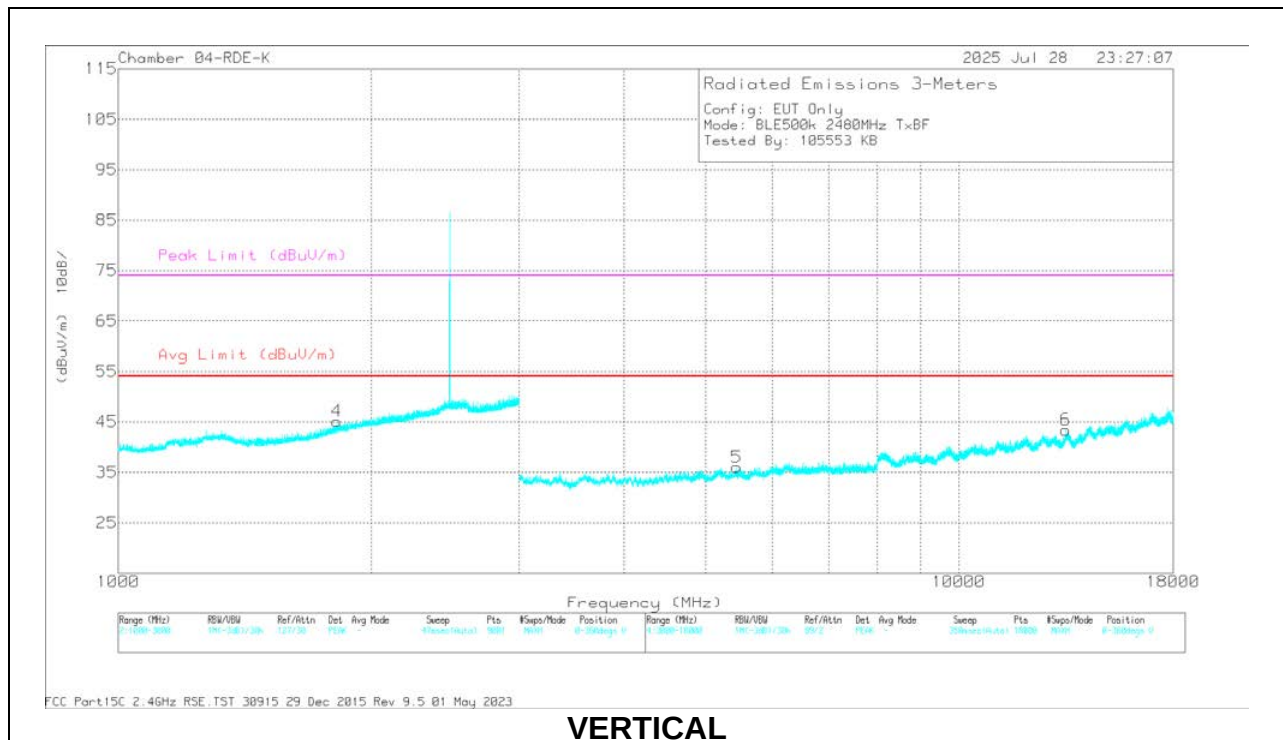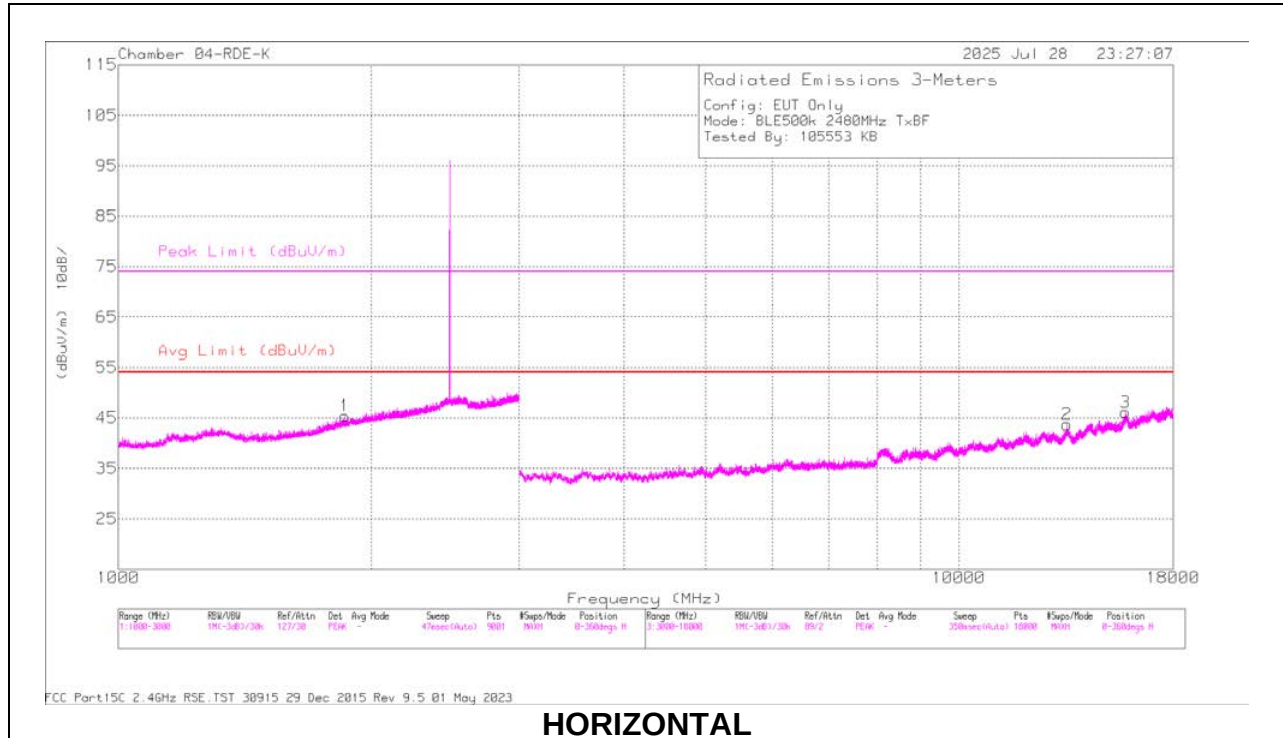



RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	206808 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1862.067	59.51	PK2	30.6	-35.9	0	54.21	-	-	-	-	360	200	H
2	13458.869	47.74	PK2	39.1	-34.4	0	52.44	-	-	-	-	360	199	H
3	* 15787.888	45.82	PK2	40.4	-32.8	0	53.42	-	-	74	-20.58	360	101	H
	* 15791.299	34.62	MAV1	40.4	-32.9	.42	42.54	54	-11.46	-	-	360	101	H
4	1821.967	59.7	PK2	30.3	-36	0	54	-	-	-	-	360	101	V
5	* 5441.869	50.29	PK2	34.6	-39.8	0	45.09	-	-	74	-28.91	360	200	V
	* 5442.521	38.89	MAV1	34.6	-39.8	.42	34.11	54	-19.89	-	-	360	200	V
6	13405.764	46.78	PK2	39.1	-34.7	0	51.18	-	-	-	-	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAV1 - KDB558074 Option 1 Maximum RMS Average

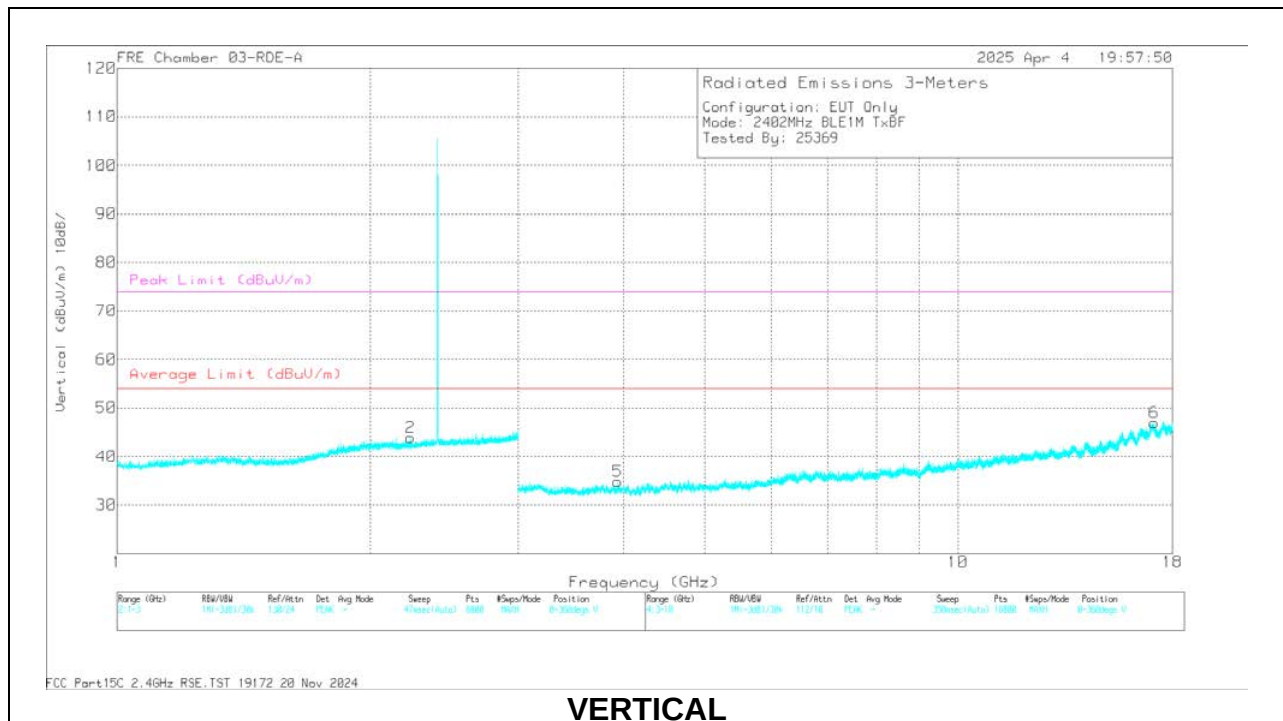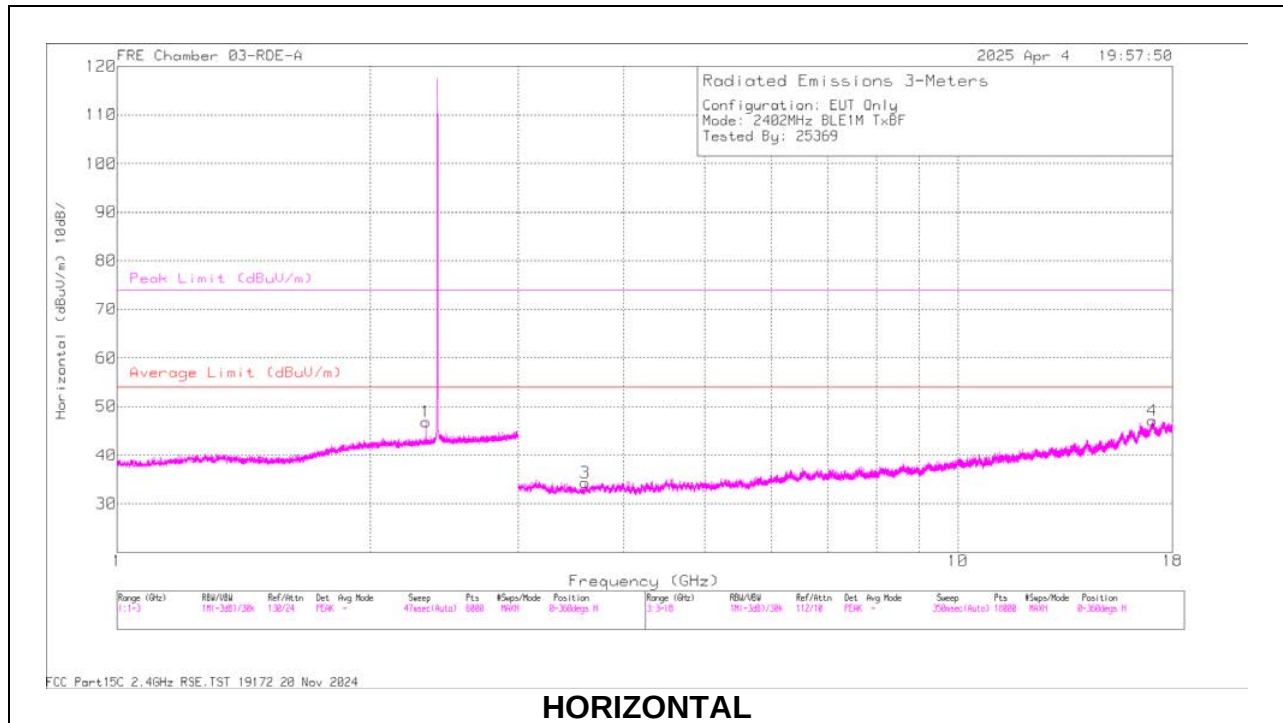LE1M**LOW CHANNEL RESULTS**

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.327982	62.7	PK2	31.9	0	-40.4	54.2	-	-	74	-19.8	233	283	H
	* 2.328163	53.04	MAV1	31.9	.71	-40.4	45.25	54	-8.75	-	-	233	283	H
2	* 2.232	61.31	PK2	31.6	0	-40.4	52.51	-	-	74	-21.49	233	101	V
	* 2.234186	49.73	MAV1	31.6	.71	-40.4	41.64	54	-12.36	-	-	233	101	V
3	* 3.604352	57.34	PK2	33	0	-47	43.34	-	-	74	-30.66	233	101	H
	* 3.606766	45.85	MAV1	33.1	.71	-46.9	32.76	54	-21.24	-	-	233	101	H
4	17.047026	53.74	PK2	41.8	0	-41.2	54.34	-	-	74	-19.66	233	200	H
5	* 3.938619	58.05	PK2	33.5	0	-47.24	44.31	-	-	74	-29.69	233	200	V
	* 3.939185	46.23	MAV1	33.5	.71	-47.22	33.22	54	-20.78	-	-	233	200	V
6	17.117345	54.49	PK2	41.8	0	-41.53	54.76	-	-	-	-	233	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAV1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL RESULTS

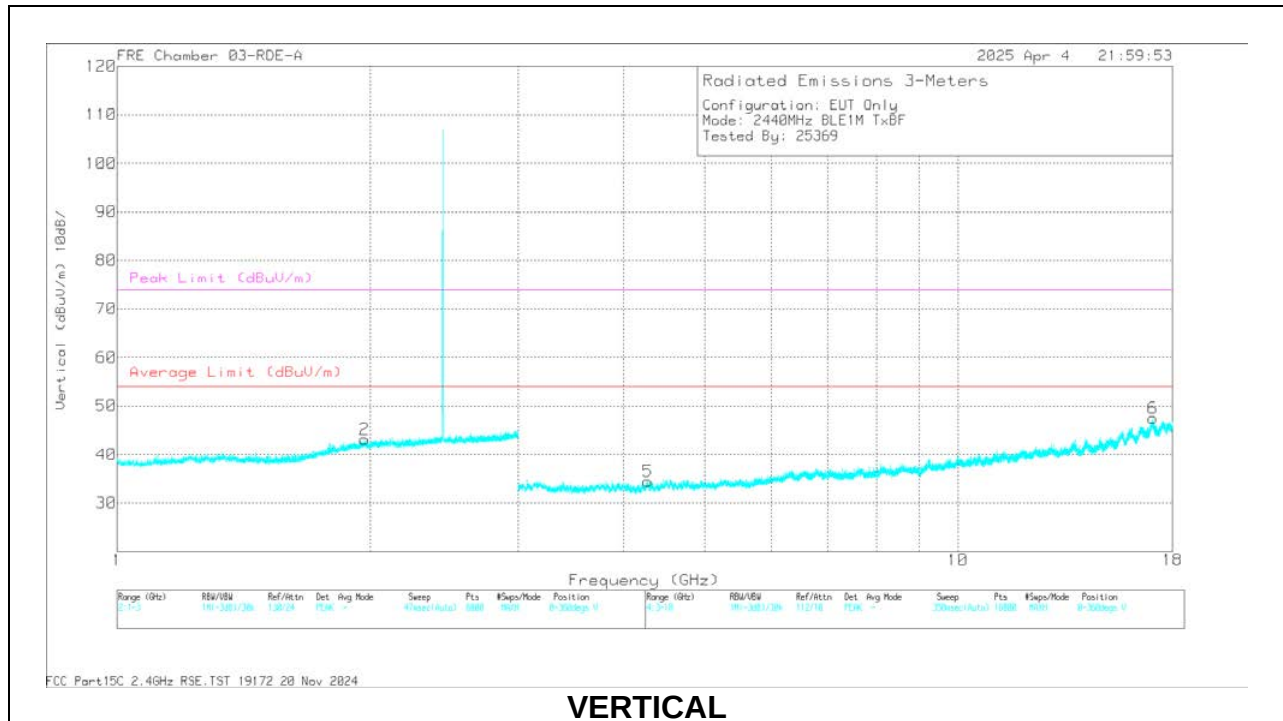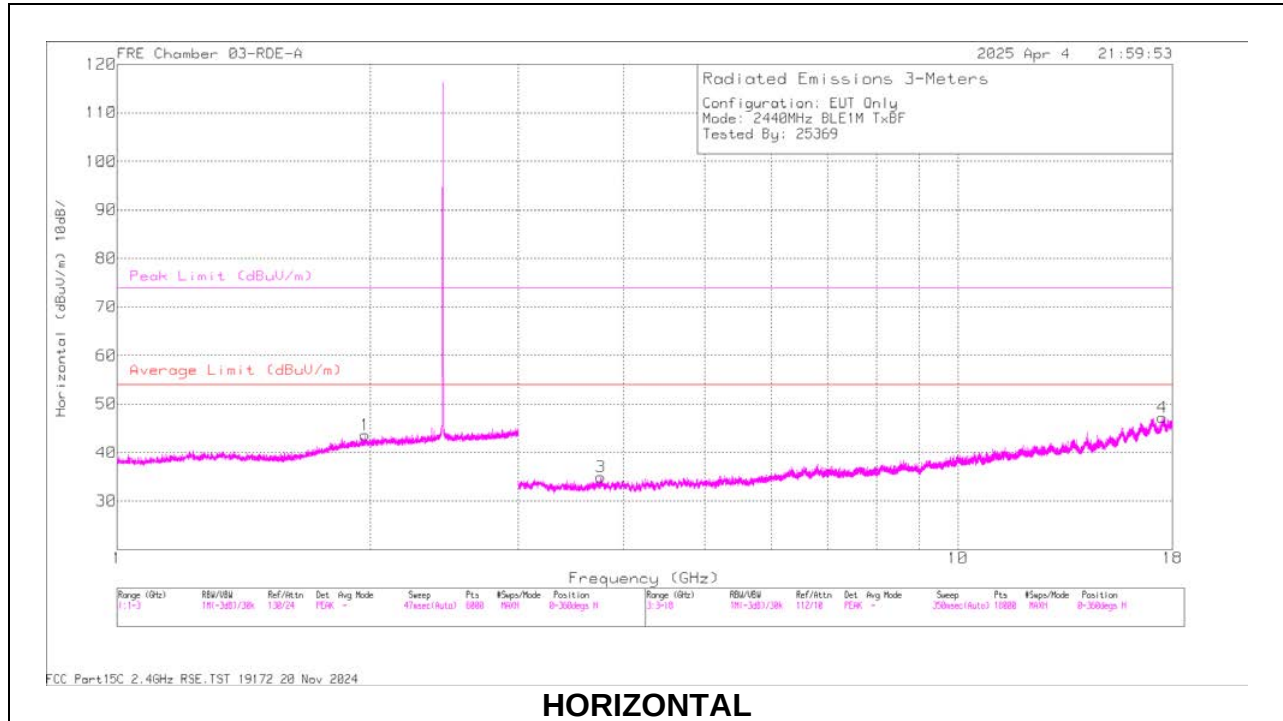

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.974401	61.29	PK2	31.2	0	-40.3	52.19	-	-	-	-	360	200	H
2	1.969734	61.61	PK2	31.2	0	-40.4	52.41	-	-	-	-	360	200	V
3	* 3.764326	57.49	PK2	33.4	0	-47.1	43.79	-	-	74	-30.21	360	101	H
3	* 3.764727	45.97	MAV1	33.4	.71	-47.1	32.98	54	-21.02	-	-	360	101	H
4	17.504347	52.28	PK2	41.9	0	-39.93	54.25	-	-	-	-	360	101	H
5	* 4.278674	58.27	PK2	33.6	0	-47.3	44.57	-	-	74	-29.43	360	101	V
5	* 4.276086	46.4	MAV1	33.6	.71	-47.29	33.42	54	-20.58	-	-	360	101	V
6	17.057192	53.57	PK2	41.8	0	-41.12	54.25	-	-	-	-	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAV1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL RESULTS

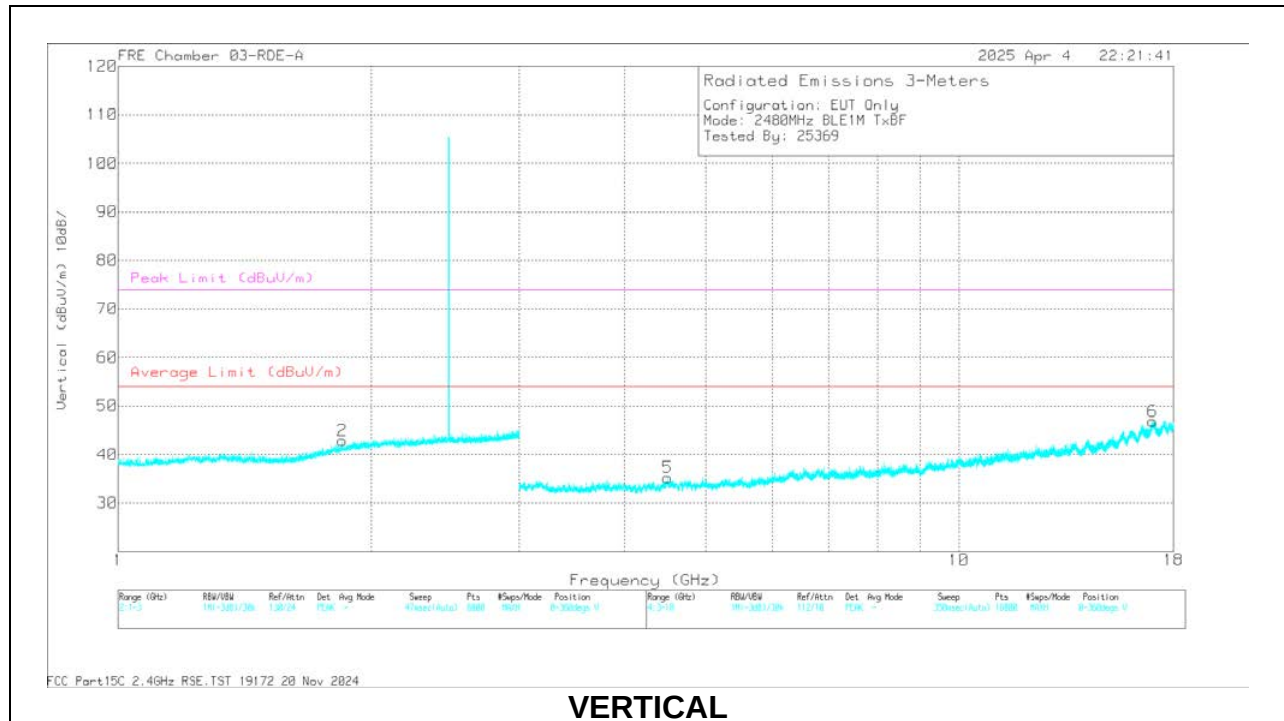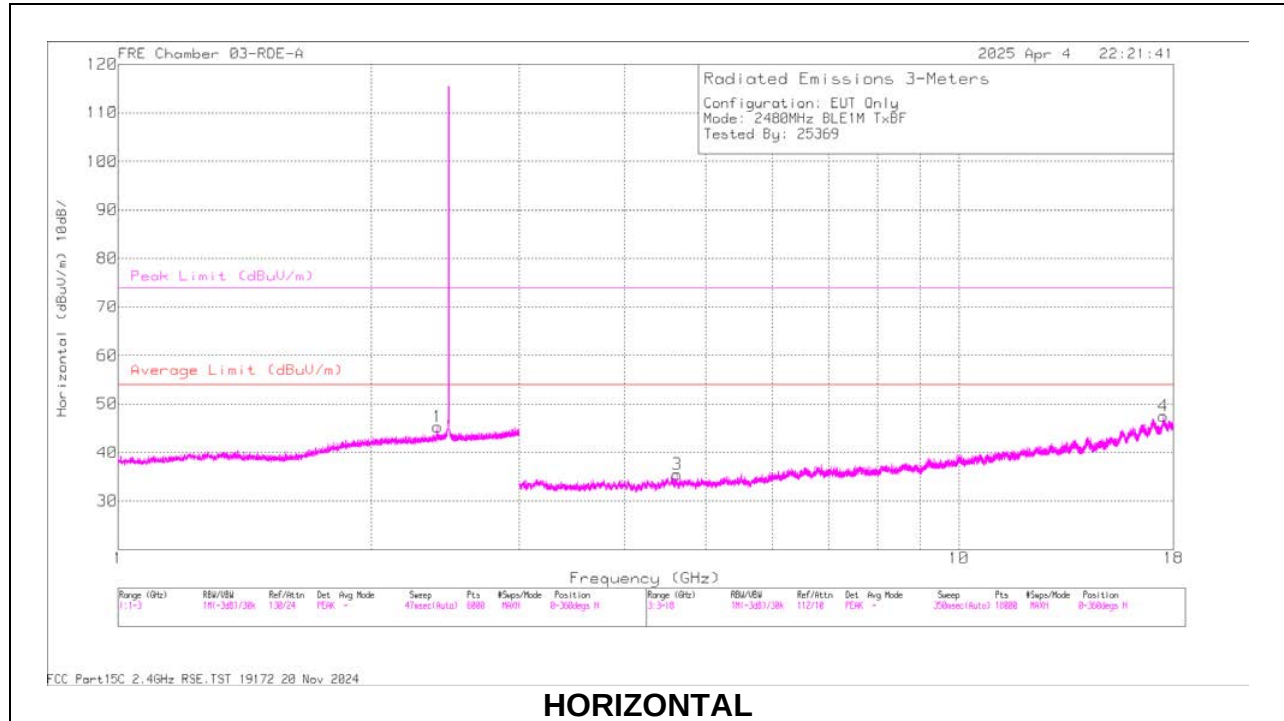



RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.397055	61.25	PK2	32.1	0	-40.21	53.14	-	-	-	-	360	101	H
2	1.850057	61.18	PK2	30.6	0	-40.21	51.57	-	-	-	-	360	101	V
3	* 4.621188	57.81	PK2	34.1	0	-47.88	44.03	-	-	74	-29.97	360	101	H
3	* 4.620205	46.27	MAv1	34.1	.71	-47.82	33.26	54	-20.74	-	-	360	101	H
4	17.512584	52.67	PK2	41.9	0	-39.9	54.67	-	-	-	-	360	200	H
5	* 4.505601	58.43	PK2	34	0	-47.8	44.63	-	-	74	-29.37	360	200	V
5	* 4.507357	46.92	MAv1	34	.71	-47.9	33.73	54	-20.27	-	-	360	200	V
6	17.017227	53.42	PK2	41.9	0	-41.12	54.2	-	-	-	-	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

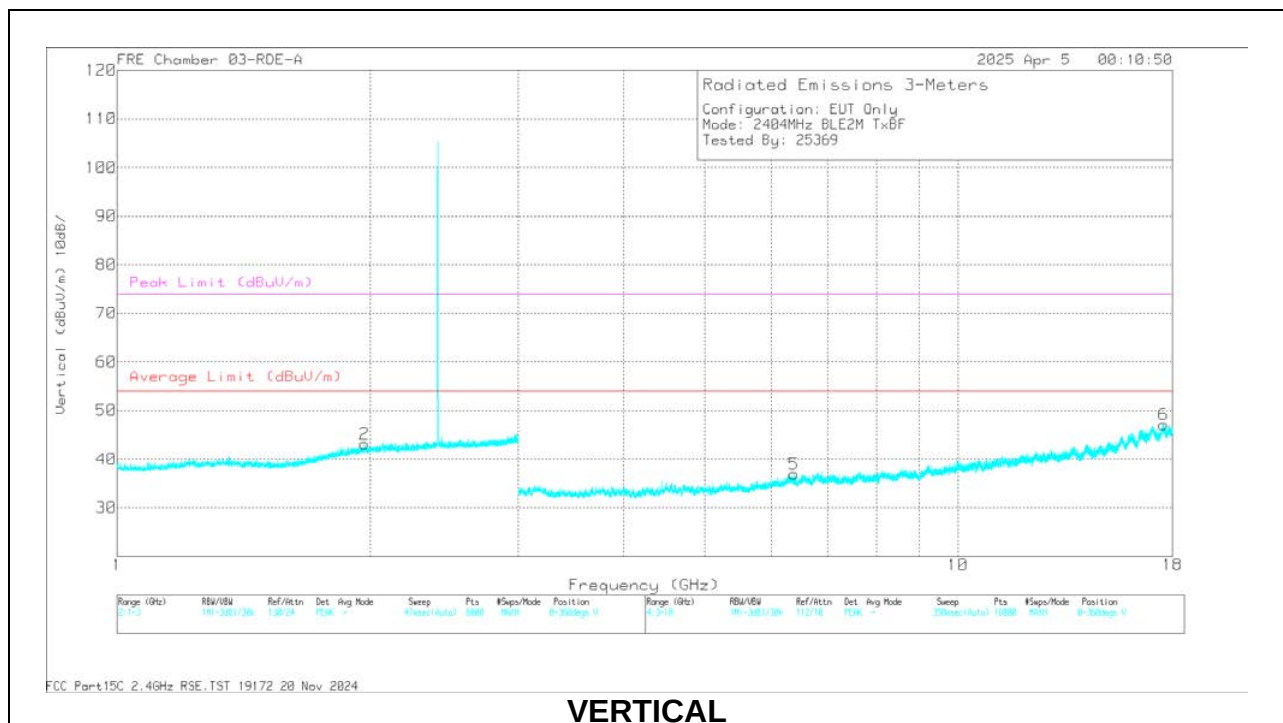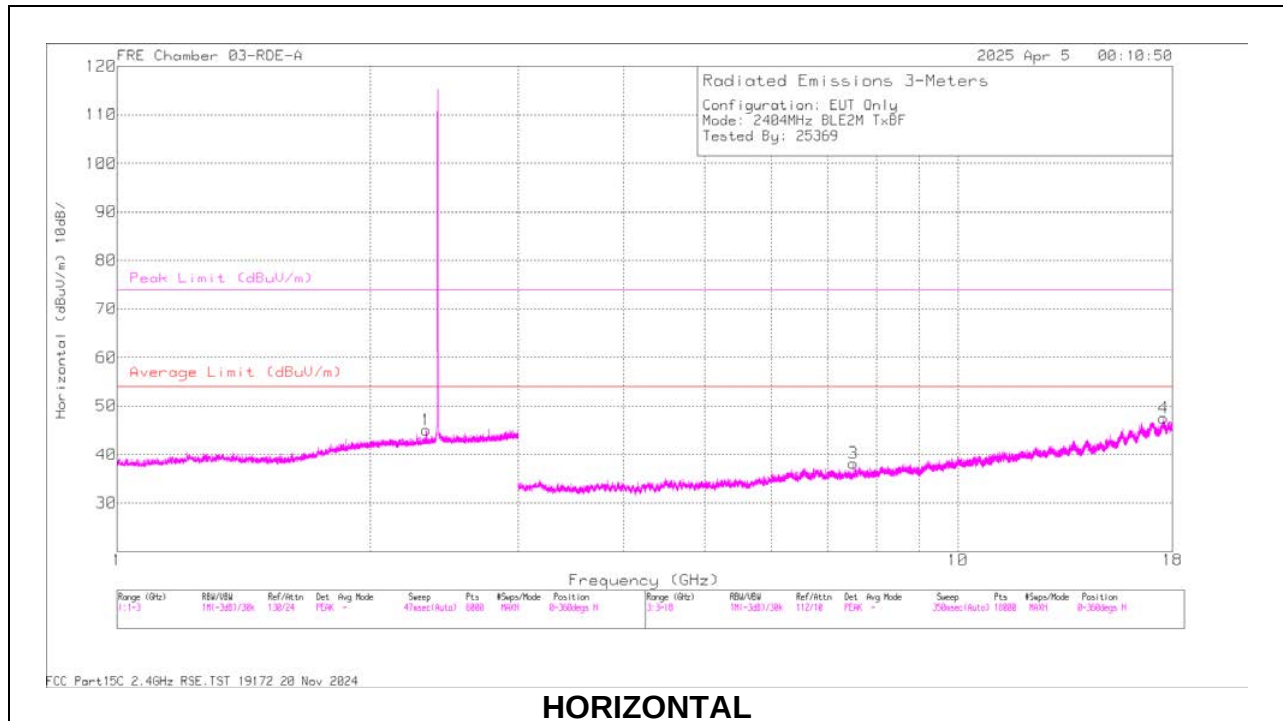LE2M**LOW CHANNEL RESULTS**

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.332091	61.44	PK2	31.9	0	-40.31	53.03	-	-	74	-20.97	360	101	H
	* 2.331289	49.85	MAv1	31.9	2.45	-40.3	43.9	54	-10.1	-	-	360	101	H
2	1.967181	61.33	PK2	31.2	0	-40.3	52.23	-	-	-	-	360	200	V
3	* 7.514528	56.88	PK2	35.8	0	-46.05	46.63	-	-	74	-27.37	360	101	H
	* 7.515562	45.06	MAv1	35.8	2.45	-46	37.31	54	-16.69	-	-	360	101	H
4	17.561217	52.52	PK2	41.9	0	-39.6	54.82	-	-	-	-	360	200	H
5	6.385778	56.63	PK2	35.6	0	-45.5	46.73	-	-	-	-	360	101	V
6	17.561832	53.14	PK2	41.9	0	-39.6	55.44	-	-	-	-	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL RESULTS

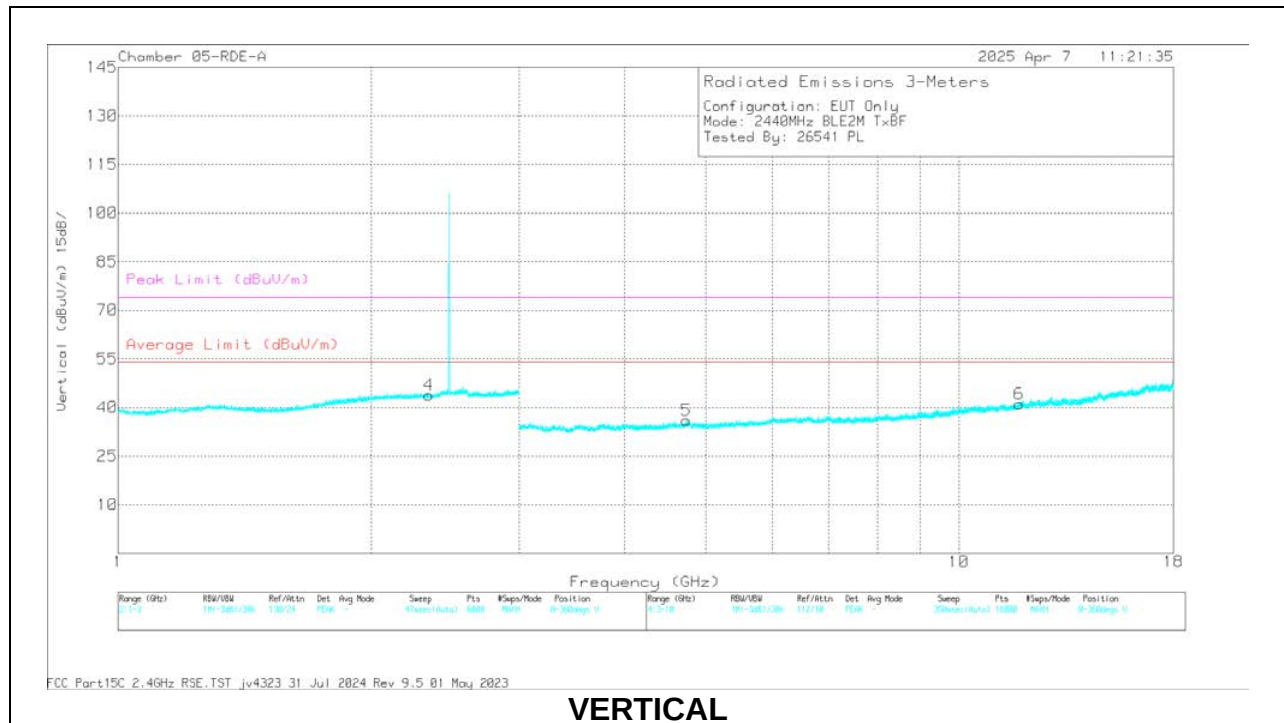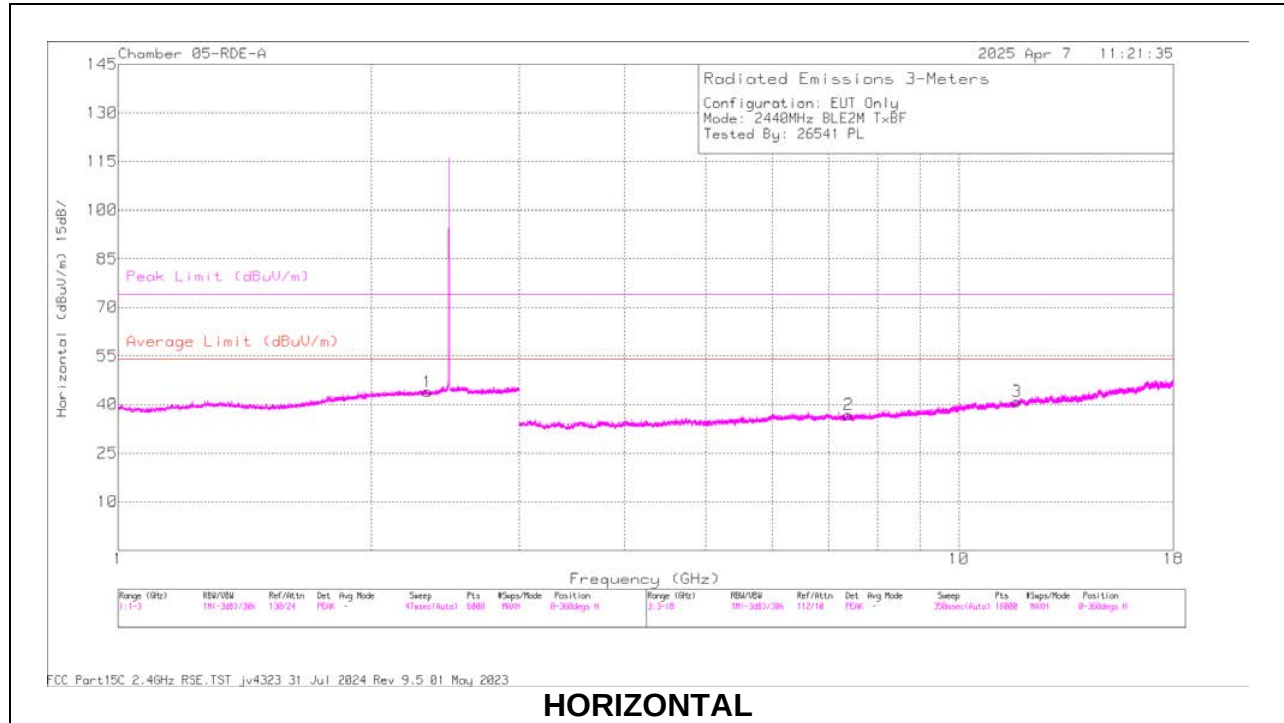

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80403 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.333227	61.66	PK2	31.9	0	-39.52	54.04	-	-	74	-19.96	214	144	H
	* 2.333716	49.65	MAv1	31.9	2.45	-39.57	44.43	54	-9.57	-	-	214	144	H
2	* 7.391746	55.7	PK2	35.6	0	-44.7	46.6	-	-	74	-27.4	157	113	H
	* 7.392199	44.3	MAv1	35.6	2.45	-44.7	37.65	54	-16.35	-	-	157	113	H
3	* 11.727676	53.47	PK2	38.5	0	-41.27	50.7	-	-	74	-23.3	261	159	H
	* 11.72725	41.56	MAv1	38.5	2.45	-41.23	41.28	54	-12.72	-	-	261	159	H
4	* 2.339745	61.17	PK2	31.9	0	-39.7	53.37	-	-	74	-20.63	62	229	V
	* 2.341255	49.77	MAv1	31.9	2.45	-39.57	44.55	54	-9.45	-	-	62	229	V
5	* 4.744834	58.36	PK2	34.5	0	-47.47	45.39	-	-	74	-28.61	257	119	V
	* 4.741985	46.68	MAv1	34.5	2.45	-47.4	36.23	54	-17.77	-	-	257	119	V
6	* 11.80444	53.06	PK2	38.6	0	-40.96	50.7	-	-	74	-23.3	97	178	V
	* 11.803977	41.72	MAv1	38.6	2.45	-41	41.77	54	-12.23	-	-	97	178	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL RESULTS

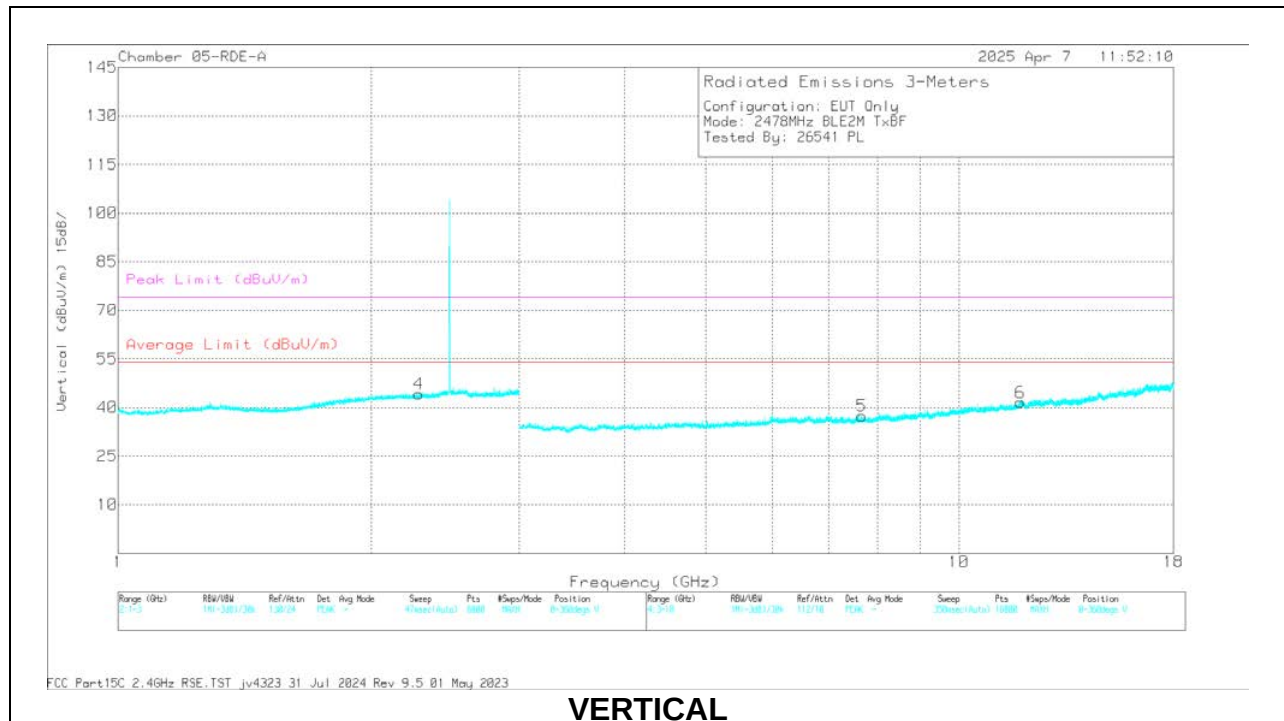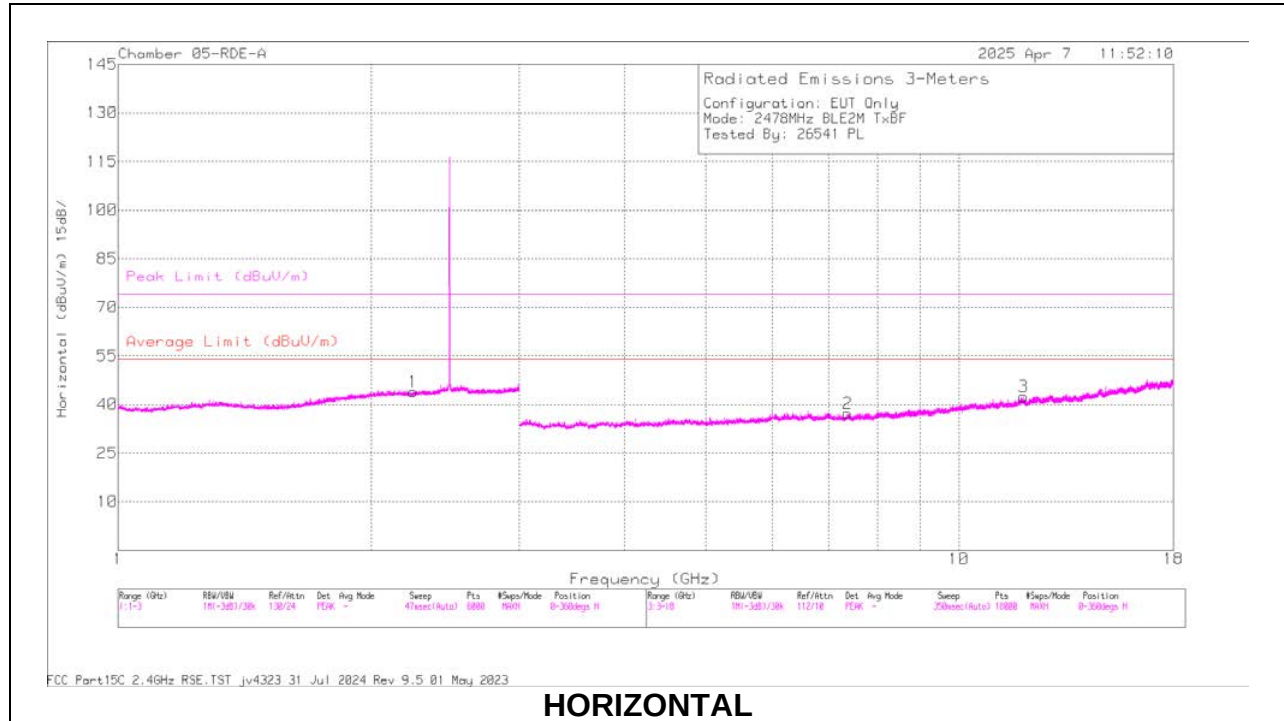



RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80403 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.243702	61.33	PK2	31.7	0	-39.63	53.4	-	-	74	-20.6	97	216	H
	* 2.243381	49.82	MAv1	31.7	2.45	-39.66	44.31	54	-9.69	-	-	97	216	H
2	* 7.375818	55.79	PK2	35.6	0	-44.68	46.71	-	-	74	-27.29	253	214	H
	* 7.376959	44.43	MAv1	35.6	2.45	-44.6	37.88	54	-16.12	-	-	253	214	H
3	* 11.941215	53.73	PK2	38.8	0	-40.52	52.01	-	-	74	-21.99	107	227	H
	* 11.943284	41.9	MAv1	38.8	2.45	-40.53	42.62	54	-11.38	-	-	107	227	H
4	* 2.279021	61.47	PK2	31.9	0	-39.7	53.67	-	-	74	-20.33	128	163	V
	* 2.278319	50.06	MAv1	31.9	2.45	-39.7	44.71	54	-9.29	-	-	128	163	V
5	* 7.668819	56.21	PK2	35.8	0	-44.7	47.31	-	-	74	-26.69	179	145	V
	* 7.670035	44.23	MAv1	35.8	2.45	-44.8	37.68	54	-16.32	-	-	179	145	V
6	* 11.830345	53.31	PK2	38.6	0	-40.9	51.01	-	-	74	-22.99	184	222	V
	* 11.829001	42.02	MAv1	38.6	2.45	-40.8	42.27	54	-11.73	-	-	184	222	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

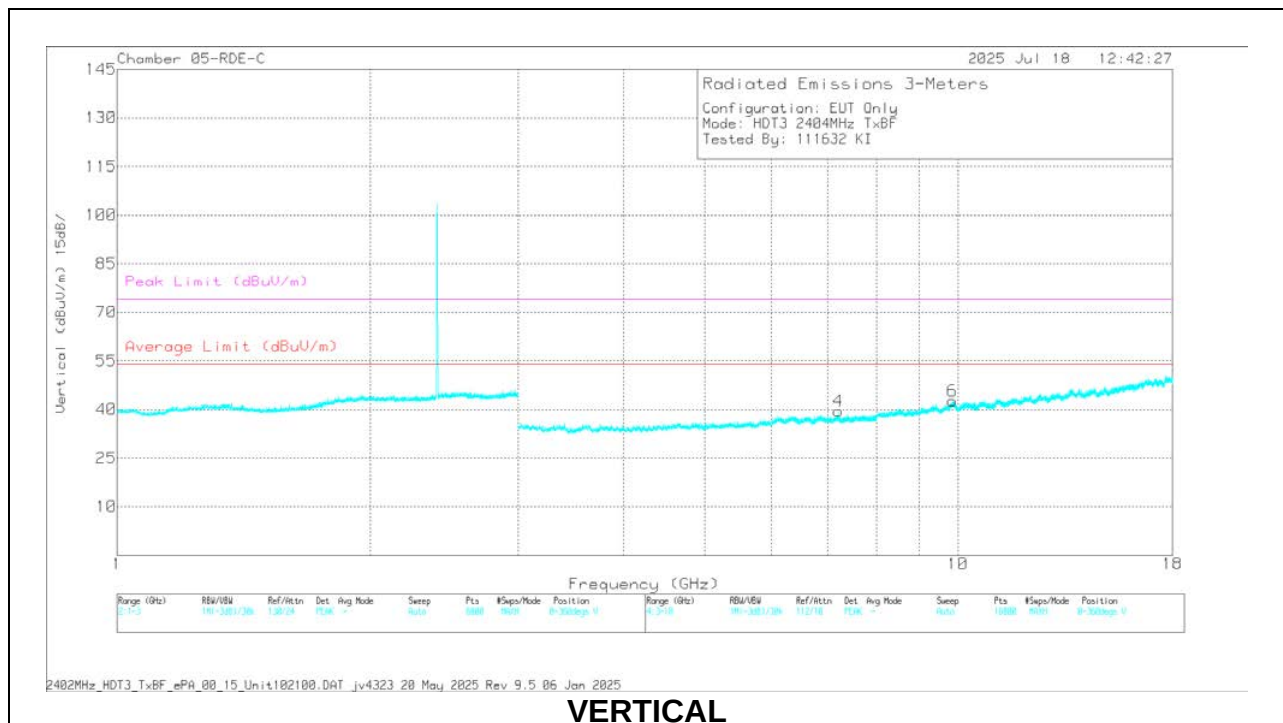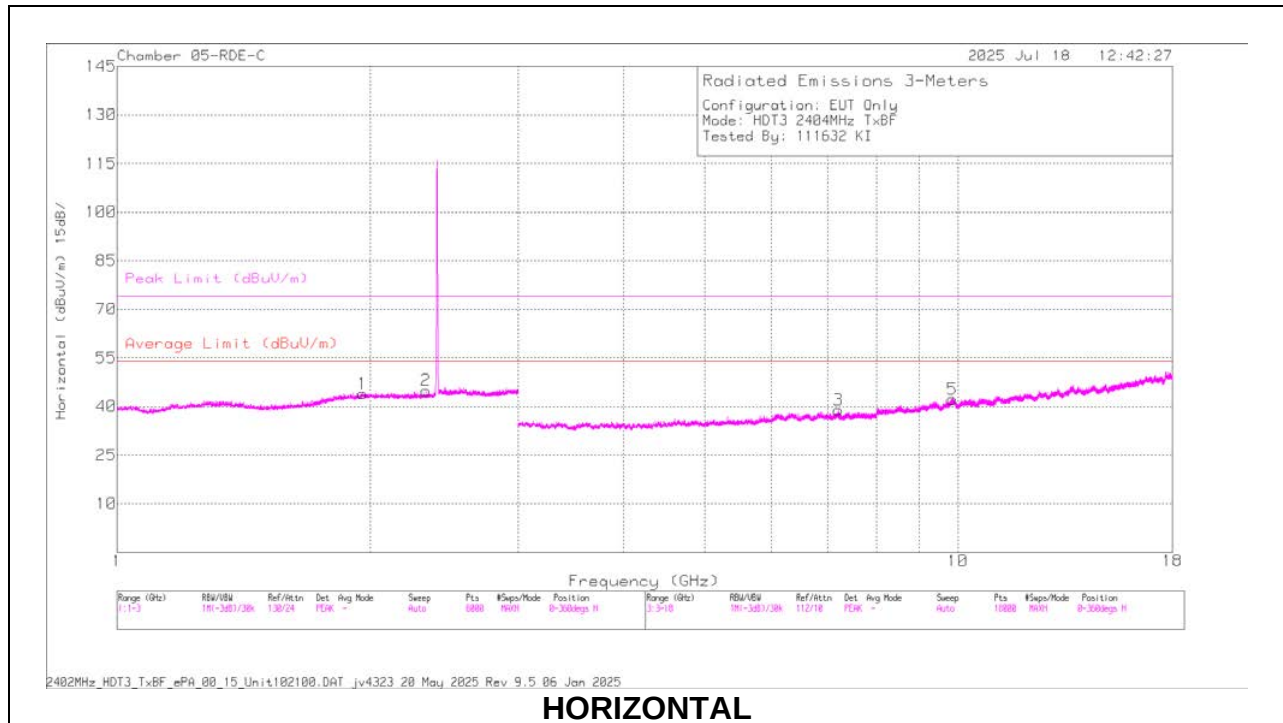HDT3**LOW CHANNEL RESULTS**



RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.95651	61.68	PK2	31.7	0	-39.86	53.52	-	-	-	-	223	199	H
2	*2.315047	61.86	PK2	31.7	0	-40.2	53.36	-	-	74	-20.64	269	176	H
	*2.32456	50.21	MAV1	31.7	.23	-40.2	41.94	54	-12.06	-	-	269	176	H
3	7.204721	59.46	PK2	35.7	0	-46.05	49.11	-	-	-	-	233	126	V
4	7.206643	59.56	PK2	35.7	0	-45.97	49.29	-	-	-	-	289	118	H
5	9.844266	61.27	PK2	37.1	0	-45.42	52.95	-	-	-	-	265	341	V
6	9.871222	60.53	PK2	37.2	0	-45.66	52.07	-	-	-	-	99	186	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAV1 - KDB558074 Option 1 Maximum RMS Average

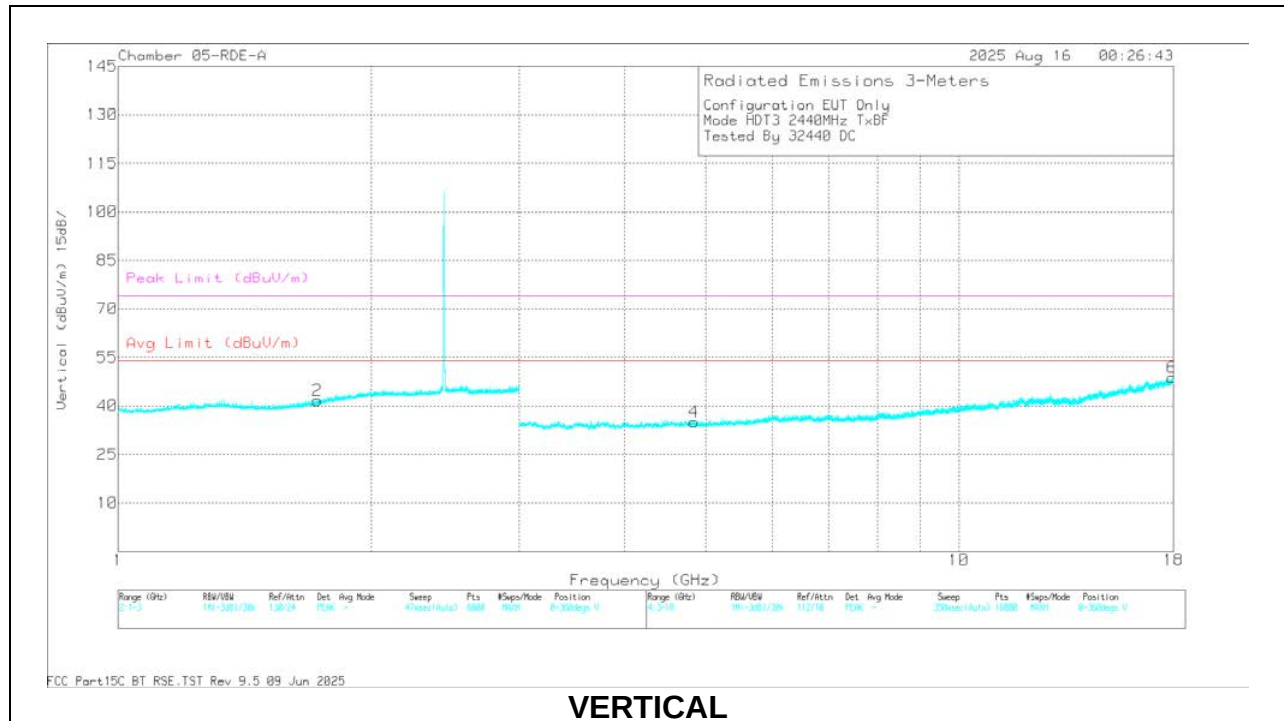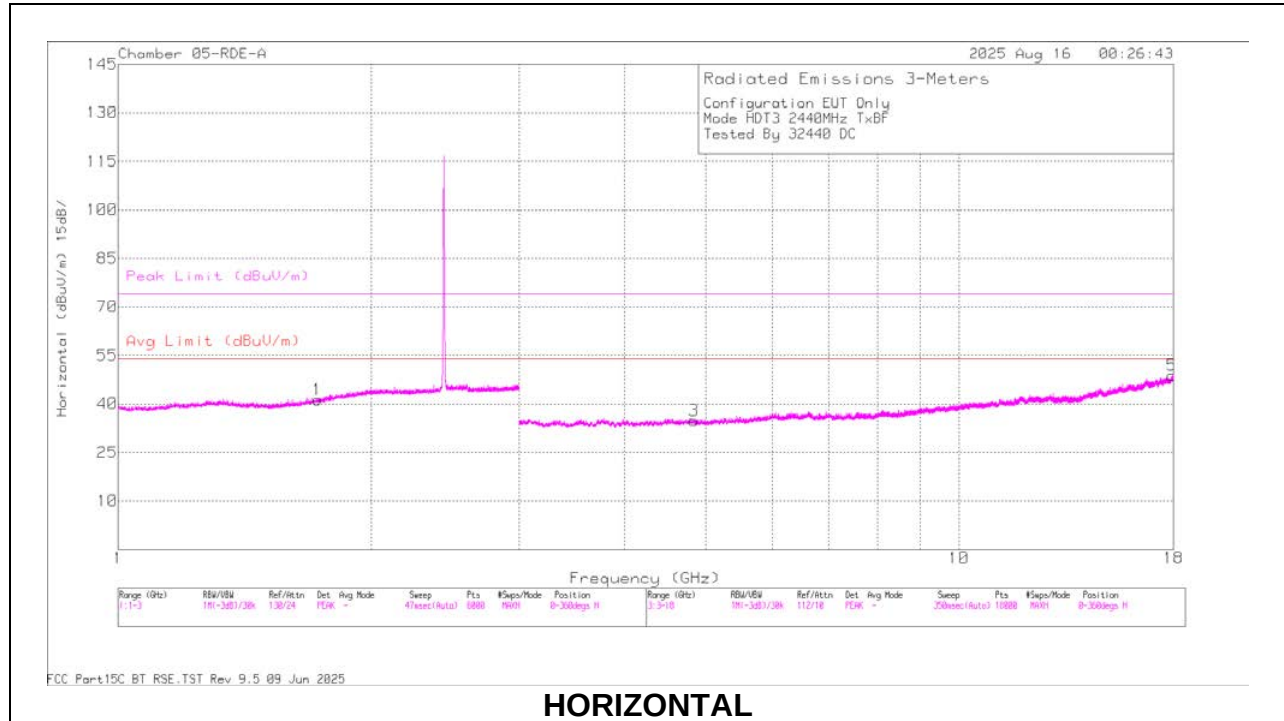MID CHANNEL RESULTS

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226671 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.718258	60.44	PK2	29.8	0	-39.9	50.34	-	-	-	-	0	101	H
2	1.718191	60.59	PK2	29.8	0	-39.9	50.49	-	-	-	-	0	101	V
3	* 4.854839	57.09	PK2	34.4	0	-47.38	44.11	-	-	74	-29.89	0	101	H
	* 4.844785	43.16	MAv1	34.4	.23	-47.28	30.51	54	-23.49	-	-	0	101	H
4	* 4.84957	56.98	PK2	34.4	0	-47.46	43.92	-	-	74	-30.08	0	101	V
	* 4.831632	43.19	MAv1	34.4	.23	-47.3	30.52	54	-23.48	-	-	0	101	V
5	* 17.947143	47.6	PK2	42.1	0	-33.3	56.4	-	-	74	-17.6	0	101	H
	* 17.925289	34.35	MAv1	42.1	.23	-33.5	43.18	54	-10.82	-	-	0	101	H
6	* 17.944572	47.69	PK2	42.1	0	-33.3	56.49	-	-	74	-17.51	0	101	V
	* 17.928314	34.36	MAv1	42.1	.23	-33.37	43.32	54	-10.68	-	-	0	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL RESULTS

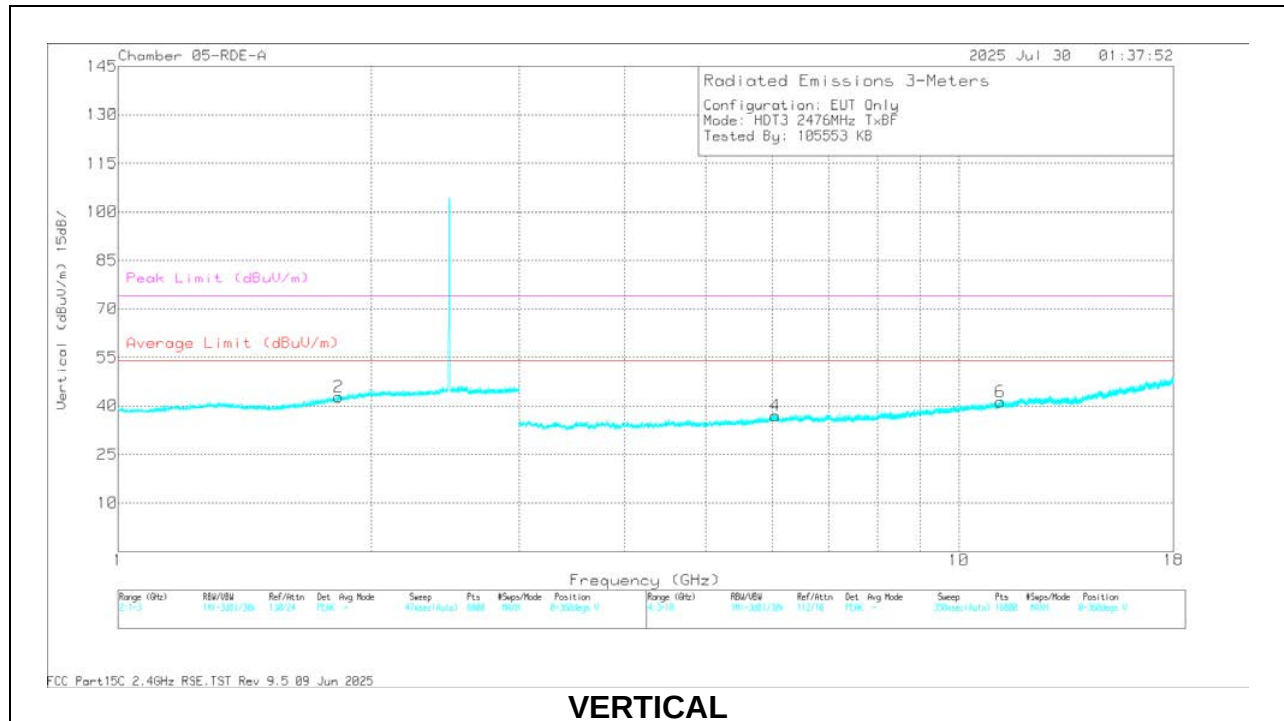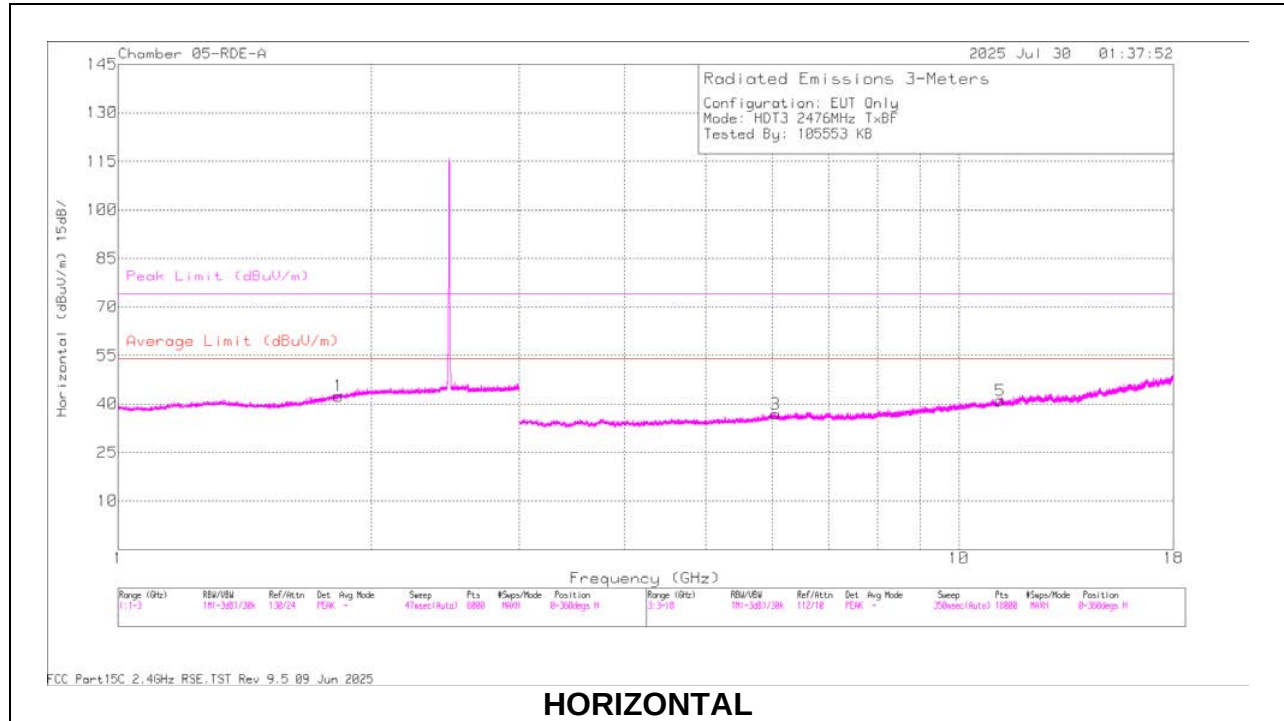



RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226671 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.840322	61.91	PK2	31	0	-39.9	53.01	-	-	-	-	360	199	H
2	1.834608	61.92	PK2	30.9	0	-39.8	53.02	-	-	-	-	360	101	V
3	6.056084	56.23	PK2	35.9	0	-45.01	47.12	-	-	-	-	360	101	H
4	6.030688	56.18	PK2	35.9	0	-45	47.08	-	-	-	-	360	101	V
5	* 11.200364	54.6	PK2	38.5	0	-41.26	51.84	-	-	74	-22.16	360	200	H
	* 11.202431	42.39	MAv1	38.5	.23	-41.14	39.98	54	-14.02	-	-	360	200	H
6	* 11.200357	54.07	PK2	38.5	0	-41.26	51.31	-	-	74	-22.69	360	200	V
	* 11.196242	42.68	MAv1	38.5	.23	-41.3	40.11	54	-13.89	-	-	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

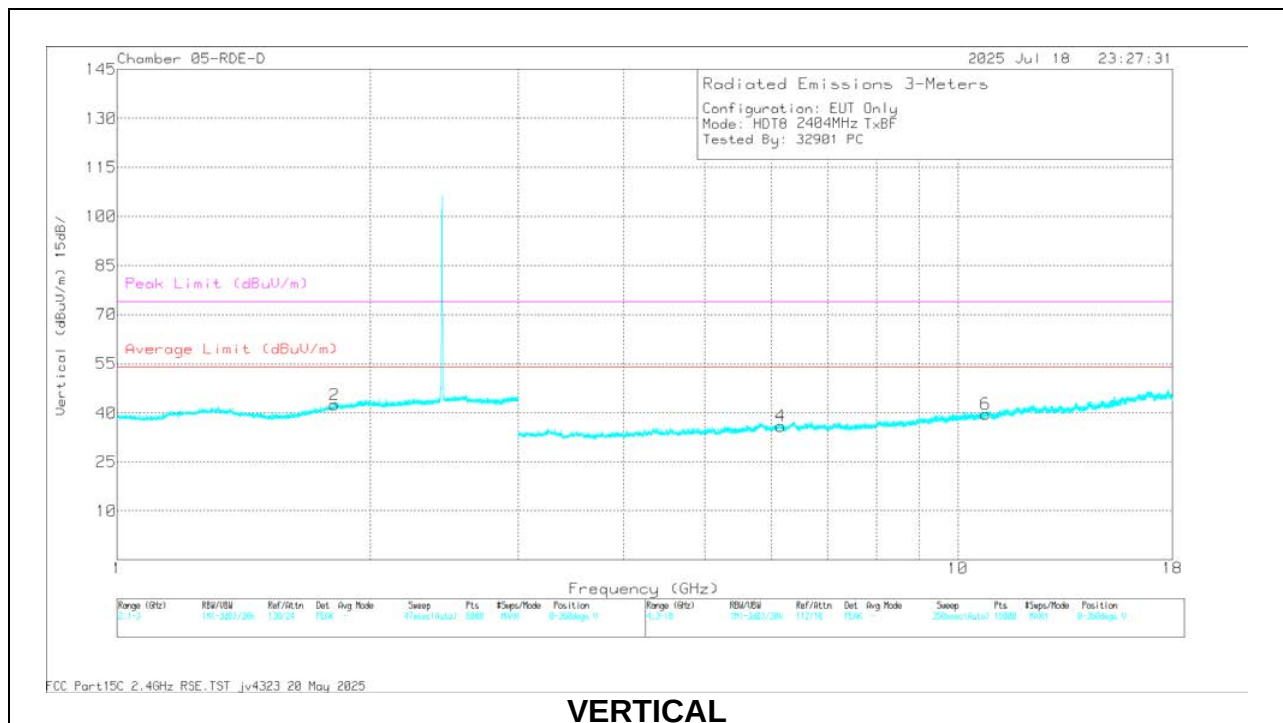
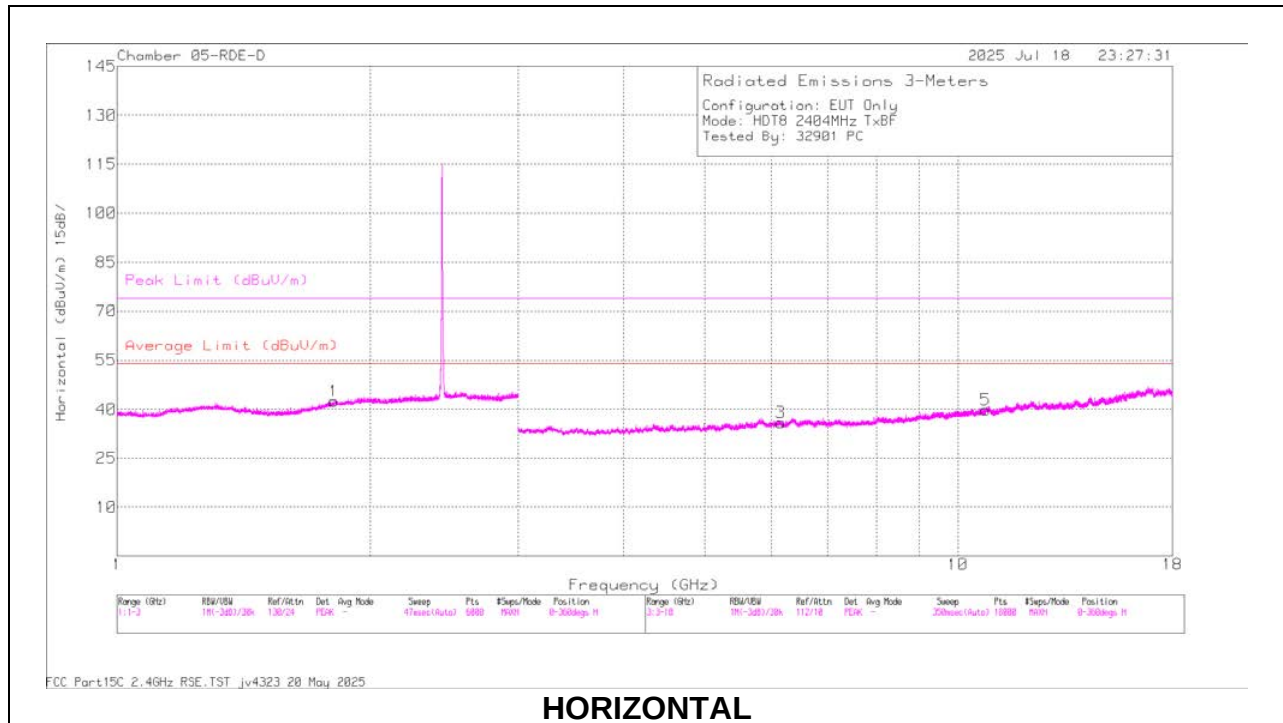
HDT8**LOW CHANNEL RESULTS**

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.812494	61.89	PK2	30.8	0	-40.92	51.77	-	-	74	-22.23	0	101	H
	1.810963	50.63	MAv1	30.8	.26	-40.94	40.75	54	-13.25	-	-	0	101	H
2	1.813385	62.34	PK2	30.8	0	-40.91	52.23	-	-	74	-21.77	0	101	V
	1.812407	50.55	MAv1	30.8	.26	-40.92	40.69	54	-13.31	-	-	0	101	V
3	6.156839	56.82	PK2	35.4	0	-46.19	46.03	-	-	74	-27.97	0	101	H
	6.155017	45.39	MAv1	35.4	.26	-46.21	34.84	54	-19.16	-	-	0	101	H
4	6.149973	56.93	PK2	35.4	0	-46.17	46.16	-	-	74	-27.84	0	101	V
	6.150041	45.21	MAv1	35.4	.26	-46.17	34.7	54	-19.3	-	-	0	101	V
5	10.791004	56.81	PK2	37.6	0	-44.65	49.76	-	-	74	-24.24	0	101	H
	10.792445	45.26	MAv1	37.6	.26	-44.69	38.43	54	-15.57	-	-	0	101	H
6	10.787775	56.67	PK2	37.6	0	-44.7	49.57	-	-	74	-24.43	0	101	V
	10.787271	45.2	MAv1	37.6	.26	-44.73	38.33	54	-15.67	-	-	0	101	V

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

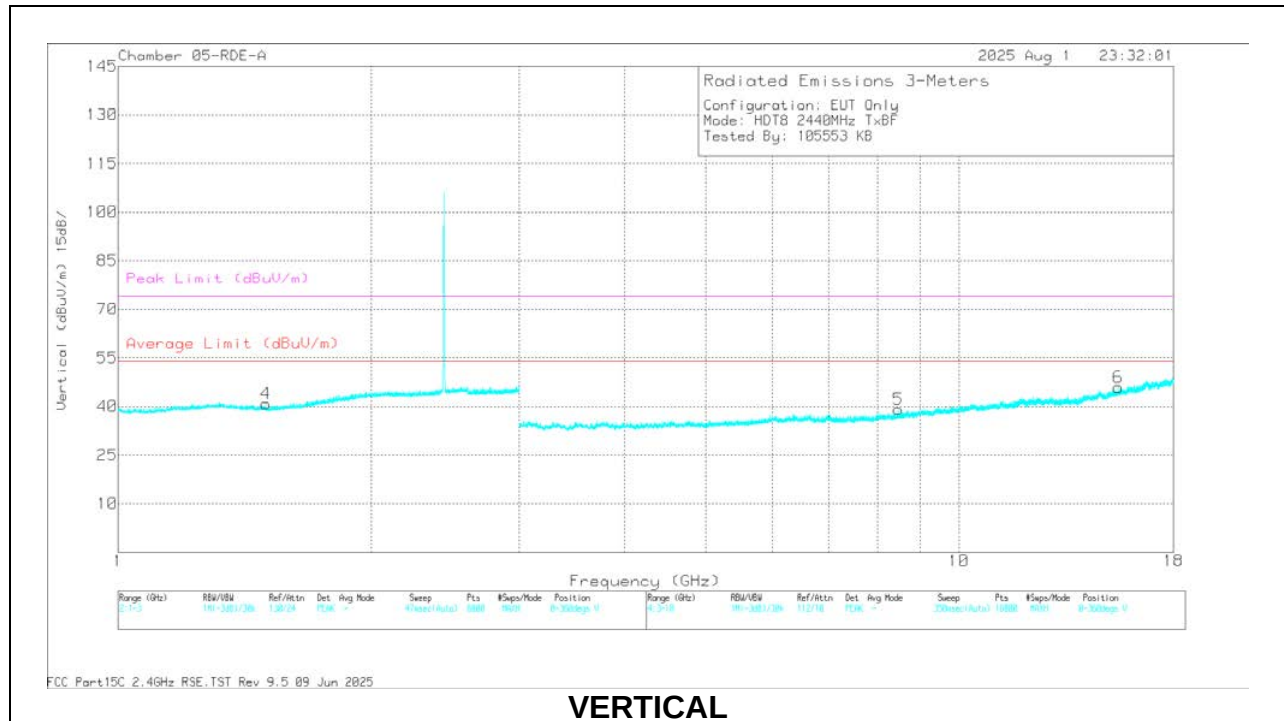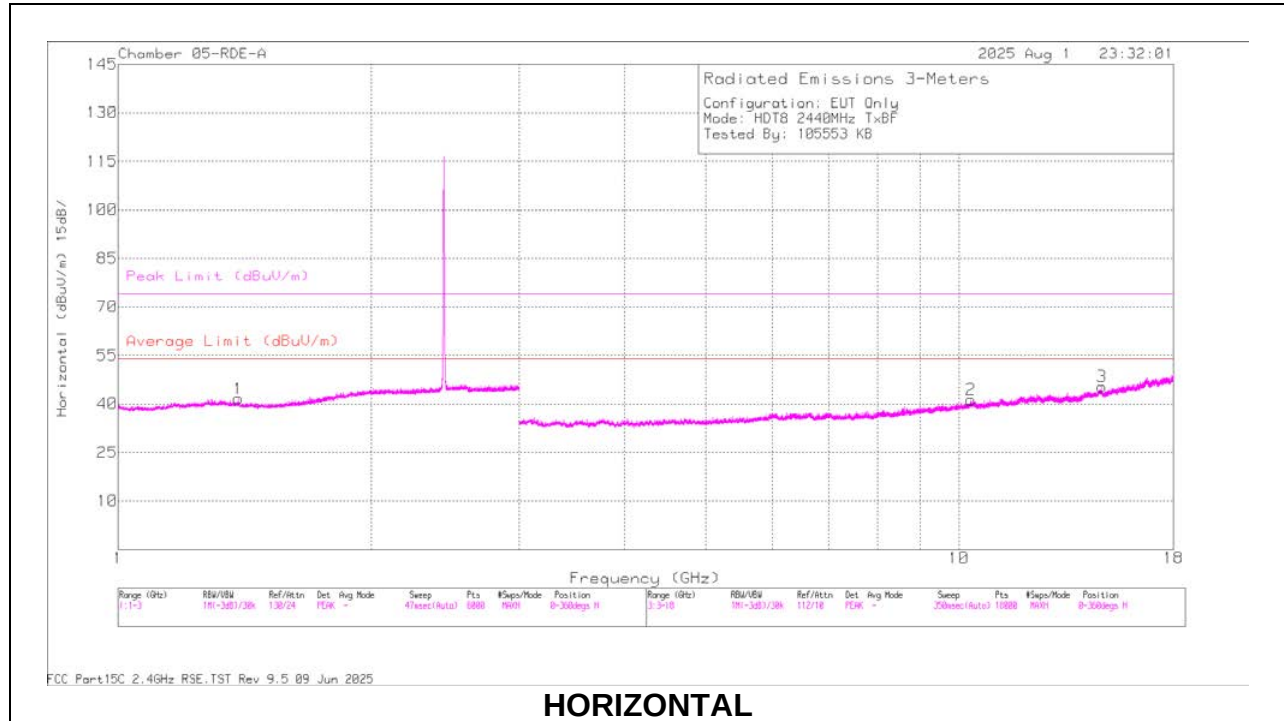MID CHANNEL RESULTS



RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226671 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.375362	61.9	PK2	28.8	0	-40.1	50.6	-	-	74	-23.4	360	101	H
	* 1.385208	50.05	MAv1	28.7	.26	-40.2	38.81	54	-15.19	-	-	360	101	H
2	10.356462	55.67	PK2	38.1	0	-43.65	50.12	-	-	-	-	360	101	H
3	14.80993	52.78	PK2	39.7	0	-39.1	53.38	-	-	-	-	360	200	H
4	* 1.500893	62.11	PK2	28.3	0	-39.9	50.51	-	-	74	-23.49	360	101	V
	* 1.499687	49.82	MAv1	28.3	.26	-39.9	38.48	54	-15.52	-	-	360	101	V
5	* 8.491769	54.39	PK2	36.1	0	-43.2	47.29	-	-	74	-26.71	360	200	V
	* 8.496476	43.02	MAv1	36.1	.26	-43.4	35.98	54	-18.02	-	-	360	200	V
6	* 15.477172	52.89	PK2	40.4	0	-38.48	54.81	-	-	74	-19.19	360	200	V
	* 15.46363	40.97	MAv1	40.3	.26	-38.5	43.03	54	-10.97	-	-	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

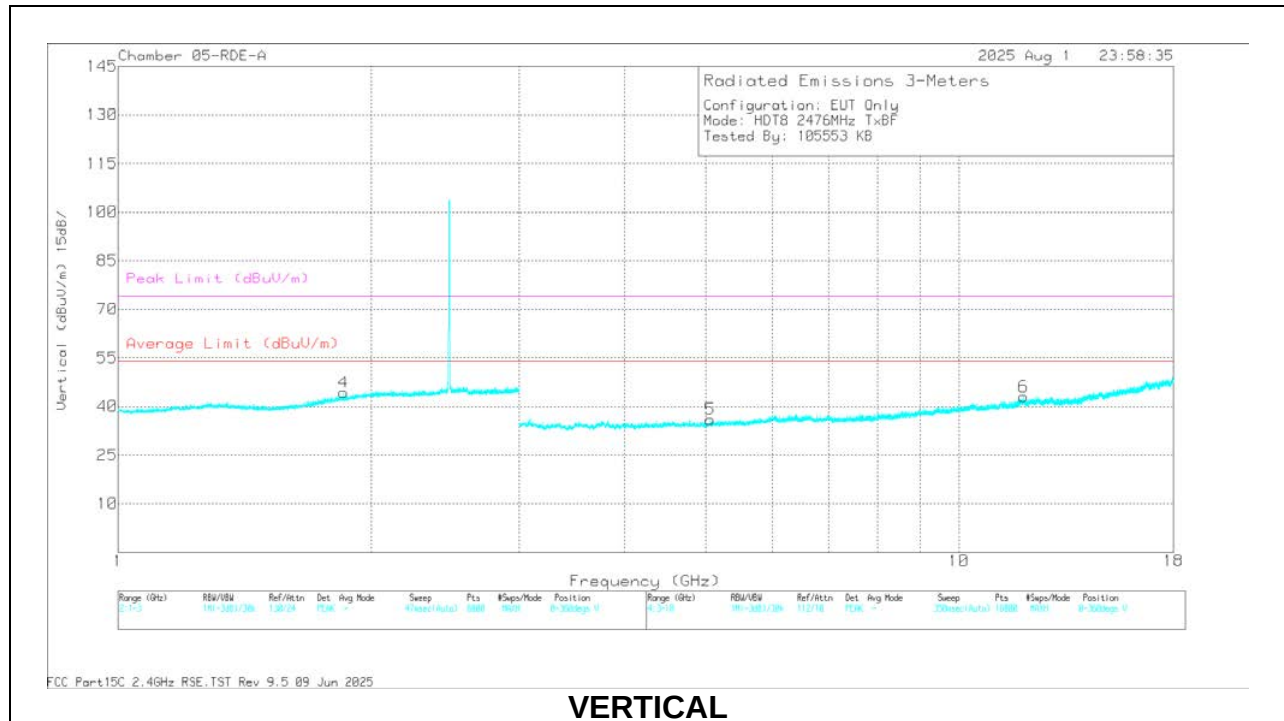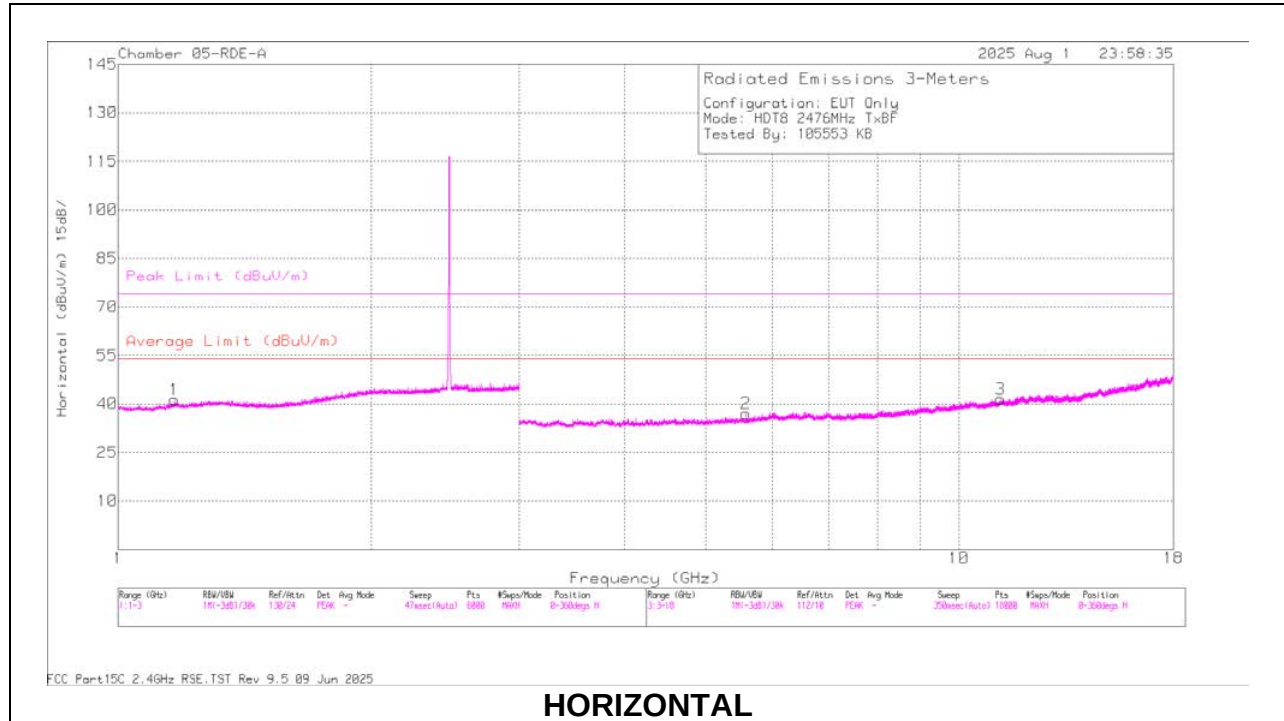HIGH CHANNEL RESULTS

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226671 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.155791	60.62	PK2	28.3	0	-40.52	48.4	-	-	74	-25.6	360	200	H
	* 1.148818	49.21	MAv1	28.2	.26	-40.5	37.17	54	-16.83	-	-	360	200	H
2	5.576613	56.8	PK2	35	0	-46.3	45.5	-	-	-	-	360	101	H
3	* 11.200764	53.96	PK2	38.5	0	-41.22	51.24	-	-	74	-22.76	360	101	H
	* 11.193581	42.15	MAv1	38.5	.26	-41.4	39.51	54	-14.49	-	-	360	101	H
4	1.843279	61.91	PK2	31	0	-39.8	53.11	-	-	74	-20.89	360	200	V
5	* 5.063089	57.97	PK2	34.5	0	-47.4	45.07	-	-	-	-	360	200	V
	* 5.064676	46.41	MAv1	34.5	.26	-47.33	33.84	54	-20.16	-	-	360	200	V
6	* 11.937007	53.77	PK2	39.2	0	-40.8	52.17	-	-	74	-21.83	360	101	V
	* 11.924203	41.31	MAv1	39.2	.26	-40.7	40.07	54	-13.93	-	-	360	101	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

10.3. WORST CASE BELOW 30MHz

SPURIOUS EMISSIONS BELOW 30 MHz (WORST-CASE CONFIGURATION)

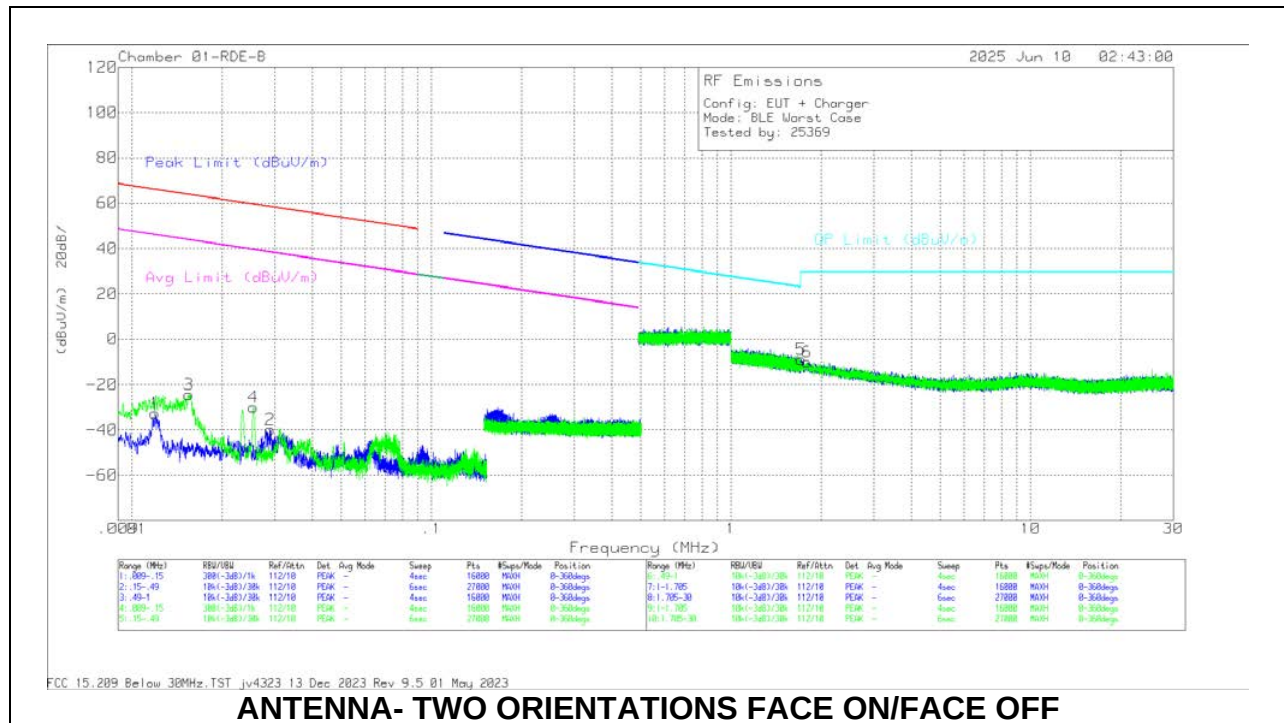

ANTENNA- TWO ORIENTATIONS FACE ON/FACE OFF

Below 30MHz Data

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna ACF (dB/m)	Amp/Cbl (dB)	Dist Corr 300m (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
1	.012	18.52	Pk	60.2	-31.4	-80	-32.68	66.04	-98.72	46.04	-78.72	0-360
2	.0289	14.06	Pk	58.2	-32.1	-80	-39.84	58.36	-98.2	38.36	-78.2	0-360
3	.0155	27.49	Pk	59.8	-31.8	-80	-24.51	63.77	-88.28	43.77	-68.28	0-360
4	.0255	23.49	Pk	58.6	-32.1	-80	-30.01	59.46	-89.47	39.46	-69.47	0-360



Pk - Peak detector

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna E(ACF)	Amp/Cbl (dB)	Dist Corr 30m (dB) 40Log	Corrected Reading (dBuV/m)	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
5	1.7155	20.5	Pk	42.8	-32.2	-40	-8.9	29.5	-38.4	0-360
6	1.7951	19.78	Pk	42.4	-32.2	-40	-10.02	29.5	-39.52	0-360

Pk - Peak detector

10.4. WORST CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

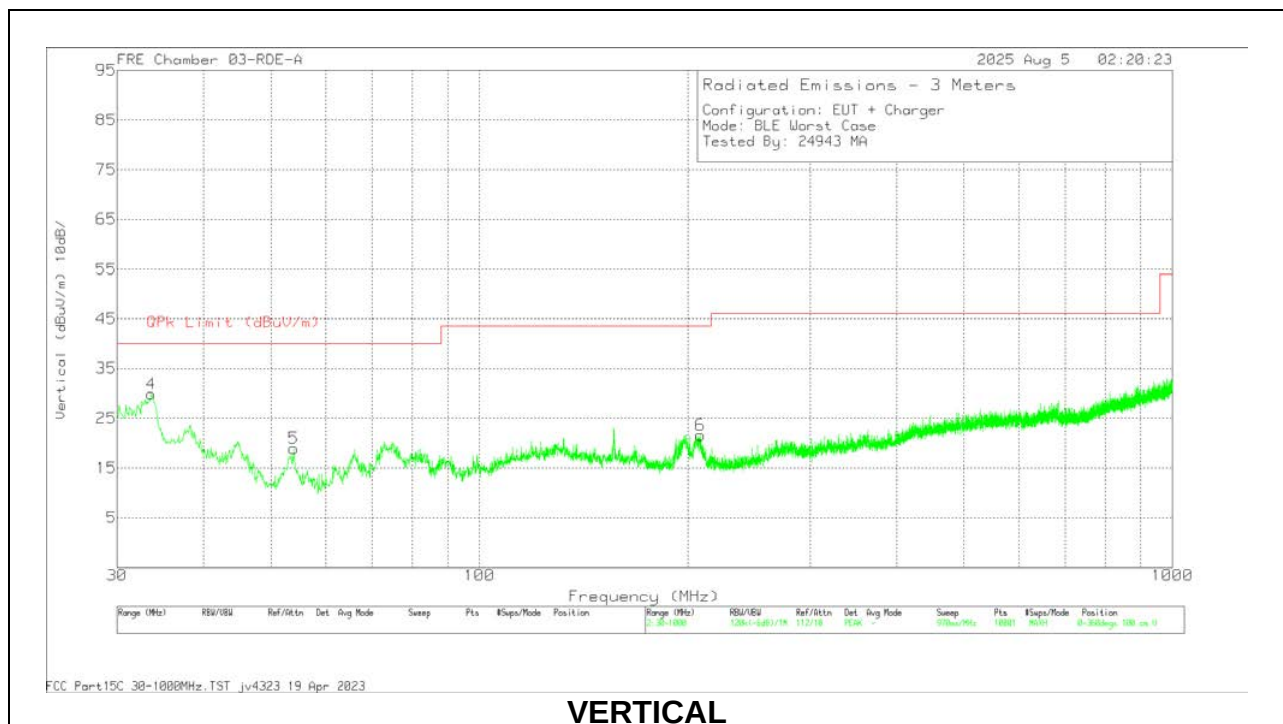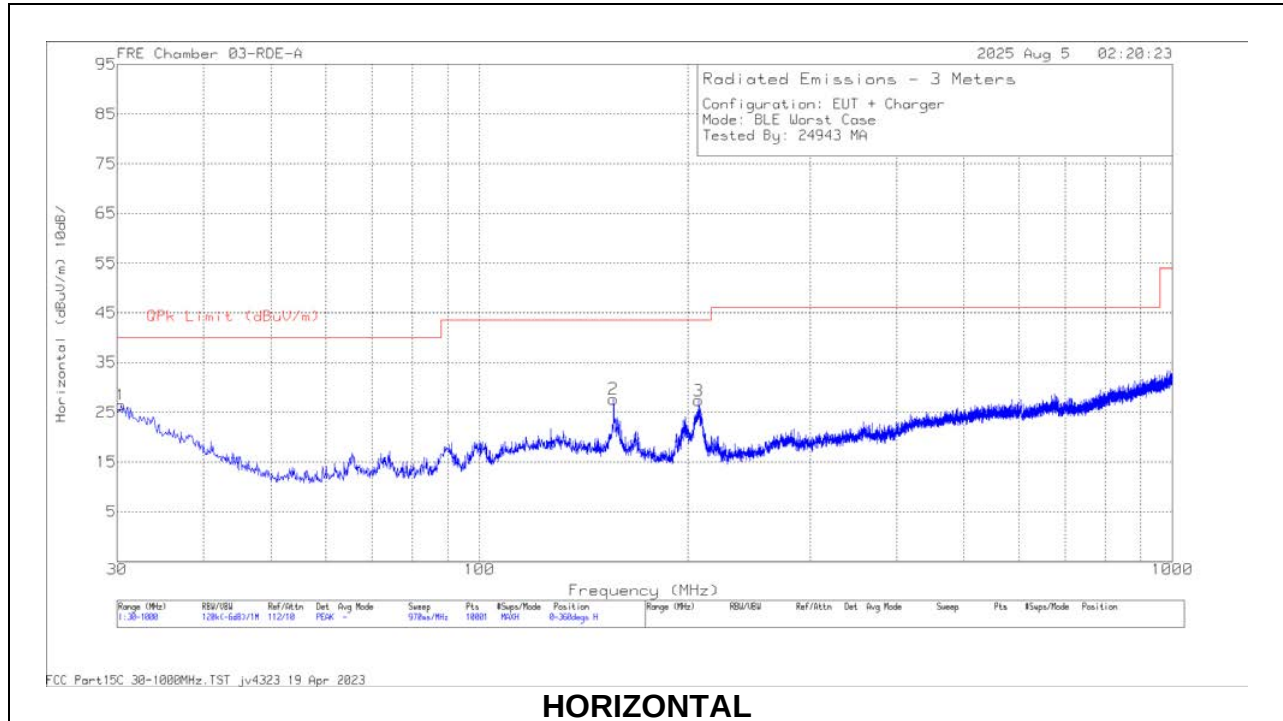

DATA


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80813 ACF (dB/m)	CBL AMP (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	33.6827	23.1	Qp	24.2	-31.3	16	40	-24	9	364	H
2	156.163	36.08	Qp	18.3	-29.4	24.98	43.52	-18.54	64	142	H
3	208.157	35.97	Qp	16.2	-29.4	22.77	43.52	-20.75	223	123	H
4	33.5587	33.44	Qp	24.3	-31.3	26.44	40	-13.56	234	100	V
5	53.5431	30.2	Qp	13.3	-30.6	12.9	40	-27.1	225	111	V
6	207.992	30.71	Qp	16.2	-29.4	17.51	43.52	-26.01	295	147	V

Qp - Quasi-Peak detector


10.5. WORST CASE 18-26 GHz

SPURIOUS EMISSIONS 18-26 GHz (WORST-CASE CONFIGURATION)

HORIZONTAL

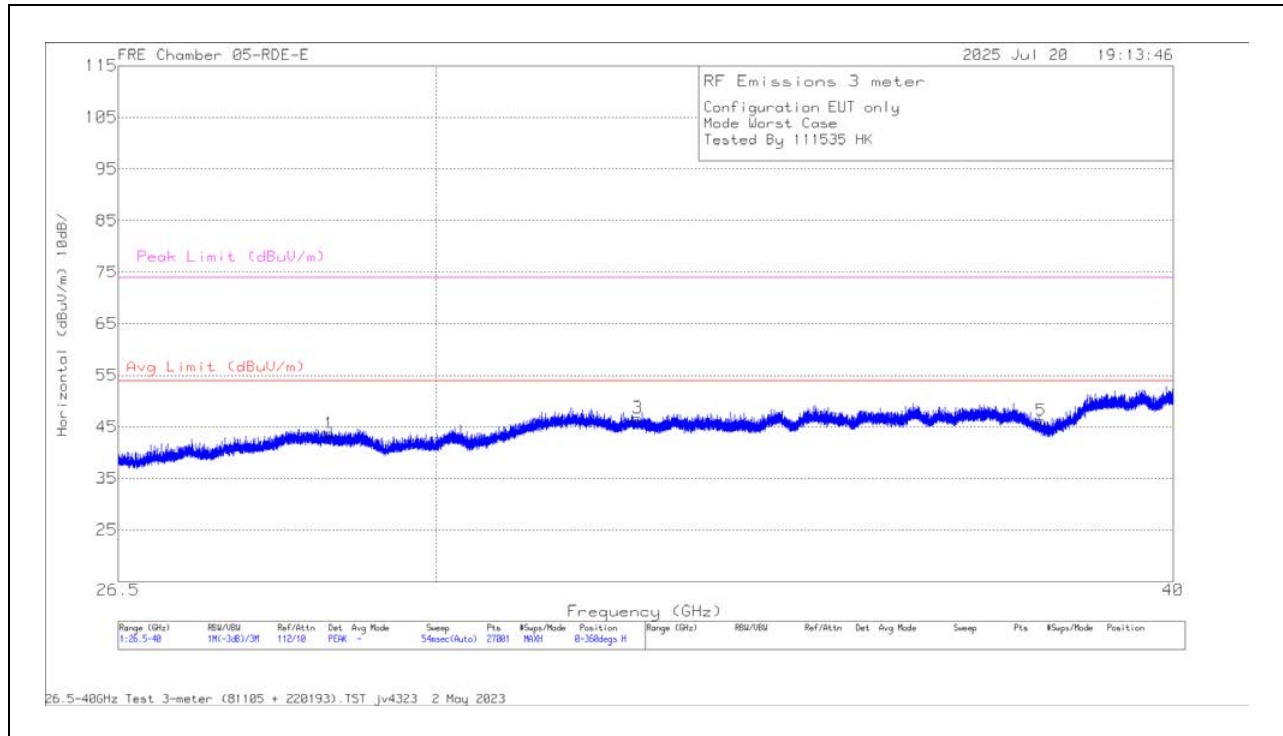

VERTICAL

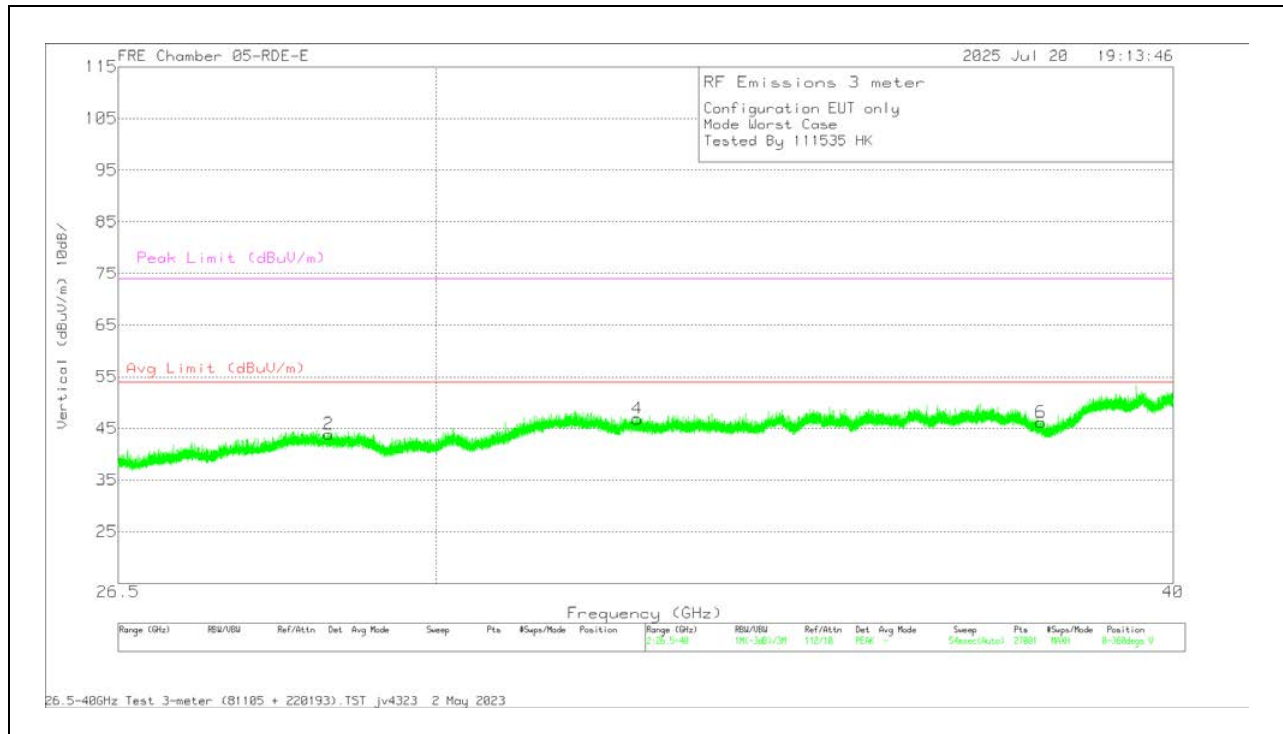

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81105 ACF (dB/m)	CBL/AMP	CBL (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	28.778189	44.44	PK2	36	-64.9	29.9	0	45.44	-	-	74	-28.56	1	200	H
	28.778954	32.66	MAv1	36	-64.9	29.9	.71	34.37	54	-19.63	-	-	1	200	H
3	32.454129	43.89	PK2	36.4	-63.3	31.6	0	48.59	-	-	74	-25.41	1	200	H
	32.452438	31.86	MAv1	36.4	-63.3	31.6	.71	37.27	54	-16.73	-	-	1	200	H
5	37.993228	43.59	PK2	37.7	-68.3	34.8	0	47.79	-	-	74	-26.21	1	101	H
	37.99389	31.69	MAv1	37.7	-68.3	34.8	.71	36.6	54	-17.4	-	-	1	101	H

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81105 ACF (dB/m)	CBL/AMP	CBL (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	28.770386	44.11	PK2	36	-64.8	29.9	0	45.21	-	-	74	-28.79	1	101	V
	28.770877	32.63	MAv1	36	-64.8	29.9	.71	34.44	54	-19.56	-	-	1	101	V
4	32.451623	43.32	PK2	36.4	-63.3	31.6	0	48.02	-	-	74	-25.98	1	200	V
	32.452729	31.89	MAv1	36.4	-63.3	31.6	.71	37.3	54	-16.7	-	-	1	200	V
6	37.986736	43.2	PK2	37.7	-68.2	34.8	0	47.5	-	-	74	-26.5	1	101	V
	37.986466	31.56	MAv1	37.7	-68.2	34.8	.71	36.57	54	-17.43	-	-	1	101	V

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

11. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

11.1.1. AC POWER LINE WITH LAPTOP


LINE 1 RESULTS

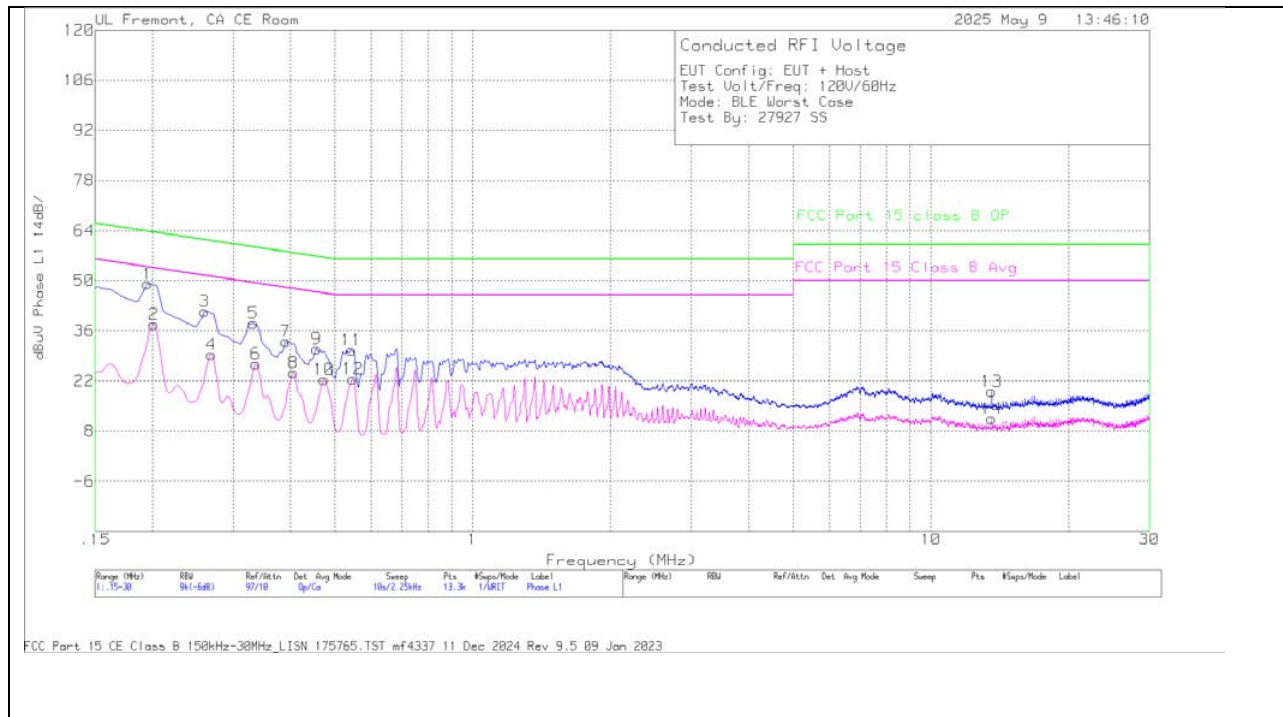

Range 1: Phase L1 .15 - 30MHz													
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	DOCF (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg dBuV	Margin (dB)	FCC Part 15 class B QP dBuV	Margin (dB)
2	.2018	18.61	Ca	.1	0	8.4	10	.71	37.82	53.54	-15.72	-	-
4	.2693	10.74	Ca	-.1	0	8.1	10	.71	29.45	51.14	-21.69	-	-
6	.3368	8.05	Ca	-.3	0	8.3	10	.71	26.76	49.28	-22.52	-	-
8	.4065	5.55	Ca	-.4	0	8.4	10	.71	24.26	47.72	-23.46	-	-
10	.474	3.2	Ca	.1	0	8.4	10	.71	22.41	46.44	-24.03	-	-
12	.5483	4.7	Ca	-.5	0	7.7	10	.71	22.61	46	-23.39	-	-
14	13.56	-7.75	Ca	.2	.1	8.2	10	.71	11.46	50	-38.54	-	-
1	.195	29.81	Qp	.1	.1	8.4	10	.71	49.12	-	-	63.82	-14.7
3	.2603	22.73	Qp	-.1	0	8.2	10	.71	41.54	-	-	61.42	-19.88
5	.3323	19.41	Qp	-.3	0	8.3	10	.71	38.12	-	-	59.39	-21.27
7	.3908	14.63	Qp	-.5	0	8.3	10	.71	33.14	-	-	58.05	-24.91
9	.456	11.25	Qp	.2	0	8.8	10	.71	30.96	-	-	56.77	-25.81
11	.5438	12.68	Qp	-.4	0	7.7	10	.71	30.69	-	-	56	-25.31
13	13.56	-1.16	Qp	.2	.1	8.2	10	.71	19.05	-	-	60	-40.95

Qp - Quasi-Peak detector
Ca - CISPR average detection

LINE 2 RESULTS

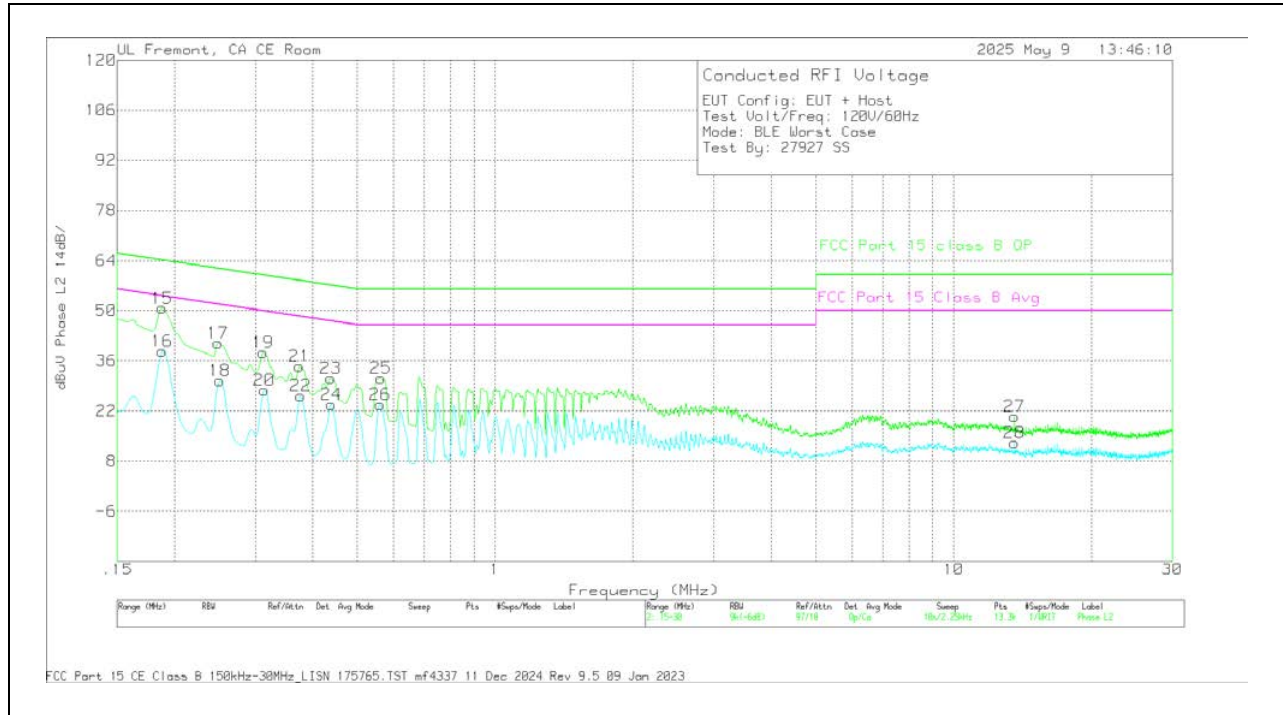


Range 2: Phase L2 .15 - 30MHz													
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	DCCF (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg dBuV	Margin (dB)	FCC Part 15 class B QP dBuV	Margin (dB)
16	.1883	19.37	Ca	.2	0	8.4	10	.71	38.68	54.11	-15.43	-	-
18	.2513	11.63	Ca	-.1	0	8.2	10	.71	30.44	51.72	-21.28	-	-
20	.3143	9.13	Ca	-.1	0	8.1	10	.71	27.84	49.86	-22.02	-	-
22	.3773	7.73	Ca	-.5	0	8.3	10	.71	26.24	48.34	-22.1	-	-
24	.4403	4.26	Ca	.1	0	8.8	10	.71	23.87	47.06	-23.19	-	-
26	.5618	5.76	Ca	-.4	0	7.8	10	.71	23.87	46	-22.13	-	-
28	13.56	-6.13	Ca	.2	.1	8.2	10	.71	13.08	50	-36.92	-	-
15	.1883	31.39	Qp	.2	0	8.4	10	.71	50.7	-	-	64.11	-13.41
17	.249	22.14	Qp	-.1	0	8.2	10	.71	40.95	-	-	61.79	-20.84
19	.312	19.61	Qp	-.1	0	8.1	10	.71	38.32	-	-	59.92	-21.6
21	.375	15.82	Qp	-.5	0	8.4	10	.71	34.43	-	-	58.39	-23.96
23	.438	11.58	Qp	0	0	8.8	10	.71	31.09	-	-	57.1	-26.01
25	.564	13.06	Qp	-.4	0	7.8	10	.71	31.17	-	-	56	-24.83
27	13.56	1.31	Qp	.2	.1	8.2	10	.71	20.52	-	-	60	-39.48

Qp - Quasi-Peak detector

Ca - CISPR average detection

11.1.2. AC POWER LINE WITH AC/DC ADAPTER

LINE 1 RESULTS

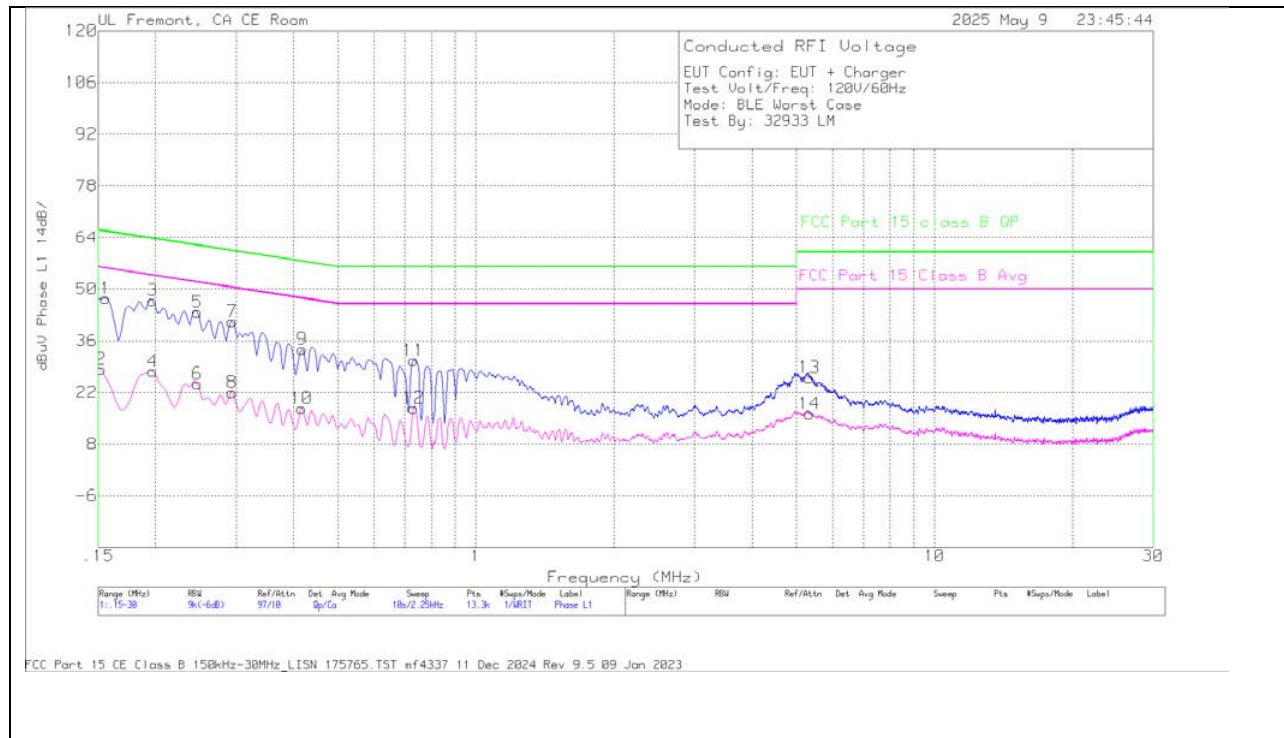


Range 1: Phase L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg dBuV	Margin (dB)	FCC Part 15 class B QP dBuV	Margin (dB)
2	.1523	9.18	Ca	.5	.1	8.5	10	28.28	55.88	-27.6	-	-
4	.1973	9.1	Ca	.1	.1	8.4	10	27.7	53.73	-26.03	-	-
6	.2468	6.22	Ca	-.1	0	8.2	10	24.32	51.87	-27.55	-	-
8	.294	3.99	Ca	0	0	8	10	21.99	50.41	-28.42	-	-
10	.4166	-.55	Ca	-.3	0	8.5	10	17.65	47.52	-29.87	-	-
12	.7305	-.77	Ca	.1	0	8.4	10	17.73	46	-28.27	-	-
14	5.3363	-1.95	Ca	0	0	8.2	10	16.25	50	-33.75	-	-
1	.1556	28.4	Qp	.5	.1	8.5	10	47.5	-	-	65.69	-18.19
3	.1973	28.3	Qp	.1	.1	8.4	10	46.9	-	-	63.73	-16.83
5	.2468	25.65	Qp	-.1	0	8.2	10	43.75	-	-	61.87	-18.12
7	.294	23.22	Qp	0	0	8	10	41.22	-	-	60.41	-19.19
9	.4178	15.5	Qp	-.3	0	8.5	10	33.7	-	-	57.49	-23.79
11	.7305	12.17	Qp	.1	0	8.4	10	30.67	-	-	56	-25.33
13	5.3363	7.85	Qp	0	0	8.2	10	26.05	-	-	60	-33.95

Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 2 RESULTS

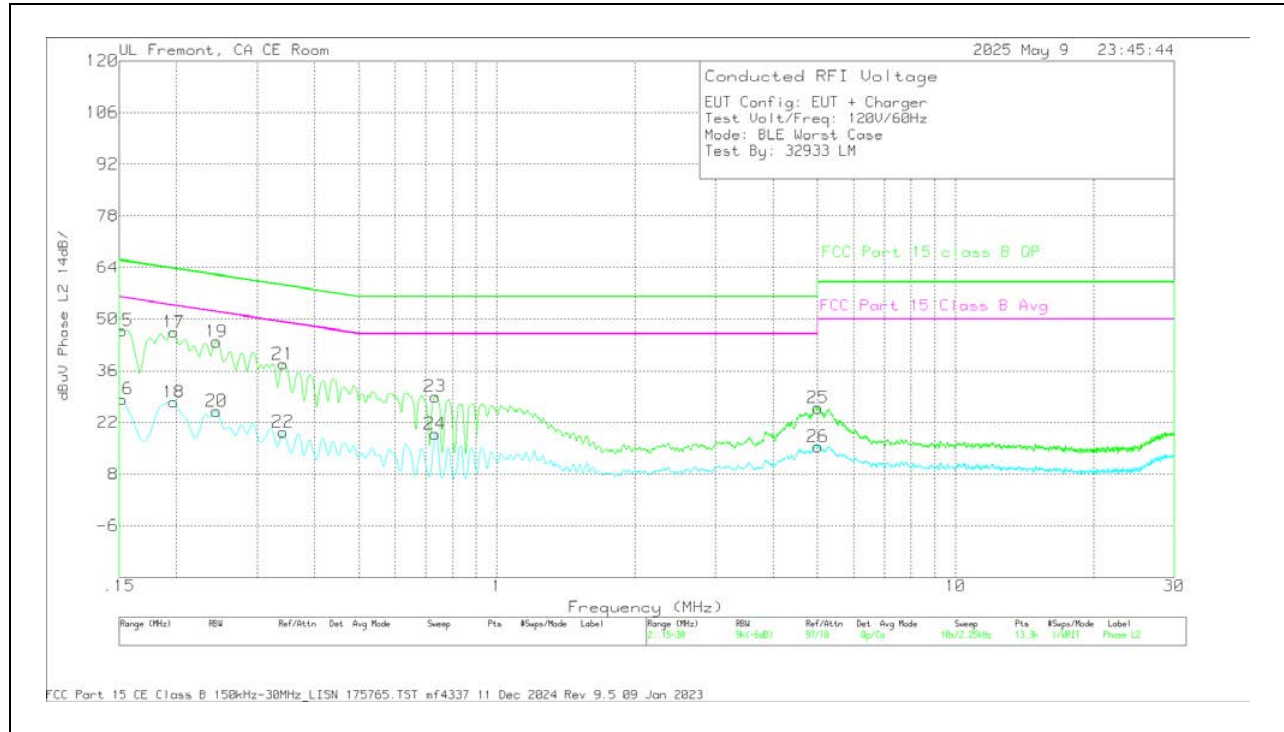

Range 2: Phase L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg dBuV	Margin (dB)	FCC Part 15 class B QP dBuV	Margin (dB)
16	.1523	9.22	Ca	.5	.1	8.5	10	28.32	55.88	-27.56	-	-
18	.1973	9.05	Ca	.1	0	8.4	10	27.55	53.73	-26.18	-	-
20	.2445	6.93	Ca	-.1	0	8.2	10	25.03	51.94	-26.91	-	-
22	.3413	1.43	Ca	-.3	0	8.3	10	19.43	49.17	-29.74	-	-
24	.7328	.29	Ca	.1	0	8.5	10	18.89	46	-27.11	-	-
26	5.01	-2.82	Ca	0	0	8.3	10	15.48	50	-34.52	-	-
15	.1523	27.74	Qp	.5	.1	8.5	10	46.84	-	-	65.88	-19.04
17	.1973	27.97	Qp	.1	0	8.4	10	46.47	-	-	63.73	-17.26
19	.2445	25.77	Qp	-.1	0	8.2	10	43.87	-	-	61.94	-18.07
21	.3413	19.81	Qp	-.3	0	8.3	10	37.81	-	-	59.17	-21.36
23	.7328	10.4	Qp	.1	0	8.5	10	29	-	-	56	-27
25	5.01	7.64	Qp	0	0	8.3	10	25.94	-	-	60	-34.06

Qp - Quasi-Peak detector

Ca - CISPR average detection

12. SETUP PHOTOS

Please refer to 15496277-EP1 for setup photos

APPENDIX A – SPOT CHECK EVALUATION

MODEL DIFFERENCES

The manufacturer hereby declares the following for models A3258, A3519, A3520 and A3521.

These models have the same PCB layout, design, common components, antennas, antenna locations and housing cases, except for FR2 is removed from variants and disabled/enabled cellular bands via software as shown below.

Model	FCC ID	IC ID	Feature Difference	Sim Support	Reference Model
A3258	BCG-E8947A	579C-E8947A	-With FR2 -No B11/21 -No UL MIMO	eSIM	-
A3519	BCG-E8951A	579C-E8951A	-Without FR2 -Added B11/21 -No UL MIMO	eSIM	A3258
A3520	BCG-E8952A	579C-E8952A	-Without FR2 -No B14, B29, B71, B11/21 -No UL MIMO	eSIM+pSIM	
A3521	BCG-E8953A	579C-E8953A	-Without FR2 -No B14, B29, B71, B11/21, B53 -No UL MIMO, MSS	pSIM+pSIM	

The spot check plan allows for data reuse from the reference model where the variant model data meets the limits and has not changed by more than the criteria from KDB 484596 D01 v03 equation (4).

$$d_{dB} = |V_{dB} - R_{dB}| \quad (1)$$

$$d_{dB} \leq d_{dBmax} \quad (2)$$

$$d_{dBmax}(M_{dB}) = \begin{cases} (3 + M_{dB}/20) \text{ dB} & , \text{ for } 0 \leq M_{dB} \leq 60 \text{ dB} \\ 6 \text{ dB} & , \text{ for } M_{dB} > 60 \text{ dB} \end{cases} \quad (4)$$

Where d_{dB} is deviation between the variant and the reference model, V_{dB} is variant spot check level, R_{dB} is the corresponding reference measurement level, d_{dBmax} is the maximum deviation d_{dB} allowed, and M_{dB} is the margin in dB.

SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3519

A3519 SPOT CHECK RESULTS											
Equipment Class / Technology	Frequency (GHz)	Mode	Data Rate	Test Item	Channel	Measured Frequency	Original Model: A3258	Sub Model: A3519	Delta (dB)	Margin	Remarks
							FCC ID : BCG-E8947A IC : 579C-E8947A	FCC ID : BCG-E8951A IC : 579C-E8951A			
DTS / BLE	2.4	LE2M, PK, 2TX	2 Mbps	Output Power (dBm)	High	Fundamental	23.31	22.90	-0.41	-6.69	Note 1
		HDT3, High Power, TxBF, RMS, Horiz.	3Mbps	Radiated Bandedge (dBuV/m)	High	2.483553	51.25	52.79	1.54	-2.75	Note 1
		LE2M, High Power, TxBF	2 Mbps	RSE (dBuV/m)	High	11.943284	42.62	42.22	-0.40	-11.38	Note 1

Note 1: Deviation from reference to variant within the value allowed by equation (4) in KDB 484596. Additional tests not required.

SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3520

A3520 SPOT CHECK RESULTS											
Equipment Class / Technology	Frequency (GHz)	Mode	Data Rate	Test Item	Channel	Measured Frequency	Original Model: A3258	Sub Model: A3520	Delta (dB)	Margin	Remarks
							FCC ID : BCG-E8947A IC : 579C-E8947A	FCC ID : BCG-E8952A IC : 579C-E8952A			
DTS / BLE	2.4	LE2M, PK, 2TX	2 Mbps	Output Power (dBm)	High	Fundamental	23.31	23.12	-0.19	-6.69	Note 1
		HDT3, High Power, TxBF, RMS, Horiz.	3Mbps	Radiated Bandedge (dBuV/m)	High	2.483553	51.25	52.87	1.62	-2.75	Note 1
		LE2M, High Power, TxBF	2 Mbps	RSE (dBuV/m)	High	11.943284	42.62	42.08	-0.54	2.62	Note 1

Note 1: Deviation from reference to variant within the value allowed by equation (4) in KDB 484596. Additional tests not required.

SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3521

A3521 SPOT CHECK RESULTS											
Equipment Class / Technology	Frequency (GHz)	Mode	Data Rate	Test Item	Channel	Measured Frequency	Original Model: A3258	Sub Model: A3521	Delta (dB)	Margin	Remarks
							FCC ID : BCG-E8947A IC : 579C-E8947A	FCC ID : BCG-E8953A IC : 579C-E8953A			
DTS / BLE	2.4	LE2M, PK, 2TX	2 Mbps	Output Power (dBm)	High	Fundamental	23.31	23.03	-0.28	-6.69	Note 1
		HDT3, High Power, TxBF, RMS, Horiz.	3Mbps	Radiated Bandedge (dBuV/m)	High	2.483553	51.25	53.73	2.48	-2.75	Note 1
		LE2M, High Power, TxBF	2 Mbps	RSE (dBuV/m)	High	11.943284	42.62	42.17	-0.45	2.62	Note 1

Note 1: Deviation from reference to variant within the value allowed by equation (4) in KDB 484596. Additional tests not required.

END OF REPORT