

TEST REPORT

Report Number: 15496277-E3V3

Applicant : APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A

Model : A3258 (PARENT)
A3519, A3520, A3521 (VARIANTS)

Brand : APPLE

FCC ID : BCG-E8947A (PARENT)
BCG-E8951A, BCG-E8952A, BCG-E8953A (VARIANTS)

IC : 579C-E8947A (PARENT)
579C-E8951A, 579C-E8952A, 579C-E8953A (VARIANTS)

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 ISSUE 3
ISED RSS-GEN ISSUE 5 + A1 + A2

Date Of Issue:
August 18, 2025

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	07/29/25	Initial Issue	Francisco Guarnero
V2	08/15/25	Addressed TCB comments and feedback for pg 1, sections 602, 9.2, 9.4, 6.5, 10.3, & 12.	Francisco Guarnero
V3	08/18/25	Addressed TCB feedback on page 1 & Appendix A.	Francisco Guarnero

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS	6
2. TEST SUMMARY	8
3. TEST METHODOLOGY	8
4. FACILITIES AND ACCREDITATION	9
5. DECISION RULES AND MEASUREMENT UNCERTAINTY	10
5.1. METROLOGICAL TRACEABILITY	10
5.2. DECISION RULES	10
5.3. MEASUREMENT UNCERTAINTY	10
6. EQUIPMENT UNDER TEST	11
6.1. EUT DESCRIPTION	11
6.2. MAXIMUM OUTPUT POWER	11
6.3. DESCRIPTION OF AVAILABLE ANTENNAS AND CABLE LOSS	11
6.4. SOFTWARE AND FIRMWARE	11
6.5. WORST-CASE CONFIGURATION AND MODE	12
6.6. DESCRIPTION OF TEST SETUP	13
7. MEASUREMENT METHOD	18
8. TEST AND MEASUREMENT EQUIPMENT	19
9. ANTENNA PORT TEST RESULTS	21
9.1. ON TIME AND DUTY CYCLE	21
9.2. 99% BANDWIDTH	23
9.2.1. HIGH POWER HDR (HDR4)	24
9.2.2. HIGH POWER HDR TXBF (HDR4)	25
9.2.3. HIGH POWER HDR (HDR8)	26
9.2.4. HIGH POWER HDR TXBF (HDR8)	27
9.3. 6 dB BANDWIDTH	28
9.3.1. HIGH POWER HDR (HDR4)	29
9.4. OUTPUT POWER	30
9.4.1. HIGH POWER HDR (HDR4)	31
9.4.2. HIGH POWER HDR TXBF (HDR4)	31
9.4.3. HIGH POWER HDR (HDR8)	32
9.4.4. HIGH POWER HDR TXBF (HDR8)	32
9.4.5. LOW POWER HDR (HDR4)	33

9.4.6.	LOW POWER HDR TXBF (HDR4).....	33
9.4.7.	LOW POWER HDR (HDR8).....	34
9.4.8.	LOW POWER HDR TXBF (HDR8).....	34
9.5.	AVERAGE POWER	35
9.5.1.	HIGH POWER HDR (HDR4).....	36
9.5.2.	HIGH POWER HDR TXBF (HDR4).....	36
9.5.3.	HIGH POWER HDR (HDR8).....	37
9.5.4.	HIGH POWER HDR TXBF (HDR8).....	37
9.5.5.	LOW POWER HDR (HDR4).....	38
9.5.6.	LOW POWER HDR TXBF (HDR4).....	38
9.5.7.	LOW POWER HDR (HDR8).....	39
9.5.8.	LOW POWER HDR TXBF (HDR8).....	39
9.6.	POWER SPECTRAL DENSITY	40
9.6.1.	HIGH POWER HDR (HDR4).....	41
9.6.2.	HIGH POWER HDR TXBF (HDR4).....	42
9.6.3.	HIGH POWER HDR (HDR8).....	43
9.6.4.	HIGH POWER HDR TXBF (HDR8).....	44
9.7.	CONDUCTED SPURIOUS EMISSIONS	45
9.7.1.	HIGH POWER HDR (HDR4).....	46
9.7.2.	HIGH POWER HDR TXBF (HDR4).....	48
9.7.3.	HIGH POWER HDR (HDR8).....	50
9.7.4.	HIGH POWER HDR TXBF (HDR8).....	52
9.7.5.	LOW POWER HDR (HDR4).....	54
9.7.6.	LOW POWER HDR TXBF (HDR4).....	56
9.7.7.	LOW POWER HDR (HDR8).....	58
9.7.8.	LOW POWER HDR TXBF (HDR8).....	60
10.	RADIATED TEST RESULTS	62
10.1.	LIMITS AND PROCEDURE	62
10.2.	TRANSMITTER ABOVE 1 GHz	64
10.2.1.	HIGH POWER HDR (HDR4)	64
10.2.2.	HIGH POWER HDR TXBF (HDR4)	72
10.2.3.	HIGH POWER HDR (HDR8)	76
10.2.4.	HIGH POWER HDR TXBF (HDR8)	84
10.2.5.	LOW POWER HDR (HDR4)	88
10.2.6.	LOW POWER HDR TXBF (HDR4).....	96
10.2.7.	LOW POWER HDR (HDR8)	100
10.2.8.	LOW POWER HDR TXBF (HDR8).....	108
10.2.9.	WORST CASE HARMONICS AND SPURIOUS EMISSIONS	112
10.3.	WORST CASE BELOW 30MHz	124
10.4.	WORST CASE BELOW 1 GHz	125
10.5.	WORST CASE 18-26 GHz	127
11.	AC POWER LINE CONDUCTED EMISSIONS	129
11.1.	AC POWER LINE WITH LAPTOP	130
11.2.	AC POWER LINE WITH AC/DC ADAPTER	132

13. SETUP PHOTOS	134
APPENDIX A – SPOT CHECK EVALUATION	134

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A

EUT DESCRIPTION: SMARTPHONE

MODEL: A3258 (PARENT)
A3519, A3520, A3521 (VARIANTS)

BRAND: APPLE

SERIAL NUMBER: J6HHCW000670000YAV (Conducted)
J3XKVHG144 (Radiated)

SAMPLE RECEIPT DATE: 2025/02/28

DATE TESTED: APRIL 7 – AUGUST 18, 2025

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies
ISED RSS-247 Issue 3	Complies
ISED RSS-GEN Issue 5 + A1 + A2	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc will constitute fraud and shall nullify the document.

Approved & Released For
UL Verification Services Inc. By:



Frank Ibrahim
Staff Engineer
Consumer Technology Division
UL Verification Services Inc.

Prepared By:



Francisco Guarnero
Test Engineer
Consumer Technology Division
UL Verification Services Inc.

2. TEST SUMMARY

This report contains data provided by the customer which can impact the validity of results. UL Verification Services Inc. is only responsible for correctly integrating customer-provided data with measurements performed by UL Verification Services Inc.

Below is a list of the data provided by the customer:

1. Antenna gain and type (see section 6.4)
2. Cable loss (see section 6.4)

FCC Clause	ISED Clause	Requirement	Result	Comment
See Comment		Duty Cycle	Reporting purposes only	ANSI C63.10 Section 11.6.
-	RSS-GEN 6.7	99% OBW	Reporting purposes only	ANSI C63.10 Section 6.9.3.
15.247 (a) (2)	RSS-247 5.2 (a)	6dB BW	Complies	None.
15.247 (b) (3)	RSS-247 5.4 (d)	Output Power	Complies	None.
See Comment		Average power	Reporting purposes only	Per ANSI C63.10, Section 11.9.2.3.2.
15.247 (e)	RSS-247 5.2 (b)	PSD	Complies	None.
15.247 (d)	RSS-247 5.5	Conducted Spurious Emissions	Complies	None.
15.209, 15.205	RSS-GEN 8.9, 8.10	Radiated Emissions	Complies	None.
15.207	RSS-Gen 8.8	AC Mains Conducted Emissions	Complies	None.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with:

- FCC 47 CFR Part 2
- FCC 47 CFR Part 15C
- *ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024
- KDB 558074 D01 15.247 Meas Guidance
- KDB 414788 D01 Radiated Test Site
- KDB 662911 D01 Multiple Transmitter Output
- KDB 484596 D01 Referencing Test Data
- RSS-GEN Issue 5 + A1 + A2
- RSS-247 Issue 3

*Note: The use of ANSI C63.10-2020 + Cor. 1-2023 + C63.10a-2024 does not deviate from the testing procedures of ANSI C63.10-2020

4. FACILITIES AND ACCREDITATION

L Verification Services Inc. is accredited by A2LA, certification #0751.05, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
☒	Building 1: 47173 Benicia Street, Fremont, CA 94538, USA	US0104	2324A	550739
☒	Building 2: 47266 Benicia Street, Fremont, CA 94538, USA			
☒	Building 3: 843 Auburn Court, Fremont, CA 94538 USA			
☒	Building 4: 47658 Kato Rd, Fremont, CA 94538 USA			
☒	Building 5: 47670 Kato Rd, Fremont, CA 94538 USA			

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not considered when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{LAB}
Conducted Antenna Port Emission Measurement	1.94
Power Spectral Density	2.466
Time Domain Measurements Using SA	3.39
RF Power Measurement Direct Method Using Power Meter	1.3 (PK), 0.450 (Avg)
Radio Frequency (Spectrum Analyzer)	141.16 Hz
Occupied Bandwidth	1.2%
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.78 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.40 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.87 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	6.01 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.73 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.51 dB

Uncertainty figures are valid to a confidence level of 95%.

6. EQUIPMENT UNDER TEST

6.1. EUT DESCRIPTION

The Apple iPhone is a smartphone with cellular GSM, GPRS, EGPRS, WCDMA, LTE, 5GNR1, 5GNR2, IEEE 802.11a/b/g/n/ac/ax/be, Bluetooth (BT), Ultra-Wideband (UWB), Global Positioning System (GPS), Near-Field Communication (NFC), Narrow-Band (NB) UNII, 802.15.4, 802.15.4ab-Narrow Band (NB), Wireless Power Transfer (WPT) and Mobile Satellite Service (MSS) technologies. The rechargeable battery is not user accessible. This device is not user-serviceable and requires special tools to disassemble.

6.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Antenna	Configuration	Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
LAT 4	High Power	2404 - 2476	HDR4	15.77	37.76
	Low Power			8.22	6.64
	High Power		HDR8	15.92	39.08
	Low Power			8.14	6.52
LAT 3	High Power	2404 - 2476	HDR4	15.43	34.91
	Low Power			8.66	7.35
	High Power		HDR8	15.72	37.33
	Low Power			8.70	7.41
BF, LAT 4 + LAT 3	High Power	2404 - 2476	HDR4	18.97	78.89
	Low Power			11.43	13.90
	High Power		HDR8	18.90	77.62
	Low Power			11.47	14.03

6.3. DESCRIPTION OF AVAILABLE ANTENNAS AND CABLE LOSS

The antenna(s) gain, type and cable loss, as provided by the manufacturer are as follows:

Frequency Band (GHz)	Antenna Type	Antenna Peak Gain ANT 4 (dBi)	Antenna Peak Gain ANT 3 (dBi)	Cable Loss ANT 4 (dB)	Cables Loss ANT 3 (dB)
2.4	IFA	0.0	-3.5	1.56	2.29

The cables were used for RF antenna port tests that had been offset to the test equipment during testing.

6.4. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was version 23A258.

6.5. WORST-CASE CONFIGURATION AND MODE

The EUT was investigated in three orthogonal orientations X, Y, and Z on ANT 4, ANT3 and 2TX. It was determined that X (Flatbed) orientation was the worst-case orientation for ANT 4, ANT 3 and 2TX.

Radiated band edge, harmonic, and spurious emissions from 1GHz to 18GHz were performed with the EUT set to transmit at highest power on Low/Middle/High channels. There were no emissions found below 30 MHz within 20dB of the limit

Radiated emissions below 30MHz, below 1GHz, 18-26GHz and power line conducted emissions were performed with the EUT transmits at the channel with the highest output power as worst-case scenario.

For below 1GHz, tests were performed with EUT connected to AC power adapter as the worst case; and for above 1GHz, the worst-case configuration reported was tested with EUT only. For AC line conducted emission, test was investigated with AC power adapter and with laptop.

During investigation, it was observed that in scenarios where HDR4 and HDR8 represented the worst-case condition for 2.5MHz & 5MHz BW. As a result, only HDR4 and HDR8 were tested.


2G				
Mode	Modulation	Frequency Range (MHz)	Worst Case Tone	
			Power	PSD
HDR	HDR4	2404-2476	x	x
	HDRPS2			
	XHDRPS2			
	HDR8	2404-2476	x	x
	HDRPM4			
	HDRPM6			
	HDRPM8			
	XHDRPM4			
	XHDRPM6			
	XHDRPM8			
	HDRPM12			
	HDRPM16			
	XHDRPM12			
	XHDRPM16			


6.6. DESCRIPTION OF TEST SETUP


SUPPORT TEST EQUIPMENT						
Description		Manufacturer	Model	Serial Number		FCC ID/ DoC
Laptop		Apple	Macbook	G2YKJ9LWH5		N/A
Laptop AC/DC adapter		Apple	N/A	C4H238408AEPM0WAS		DoC
EUT AC/DC adapter		Apple	N/A	C4H238505ARPM0WAP		DoC
Conducted Switch Box		UL	N/A	245782		N/A
I/O CABLES (RF CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Shielded	1.0	N/A
3	AC	1	AC	Un-shielded	2	N/A
I/O CABLES (RF RADIATED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	2	N/A
2	USB	1	USB	Un-shielded	1	N/A


TEST SETUP

The EUT is connected to a test laptop during the tests. Test software exercised the radio card.

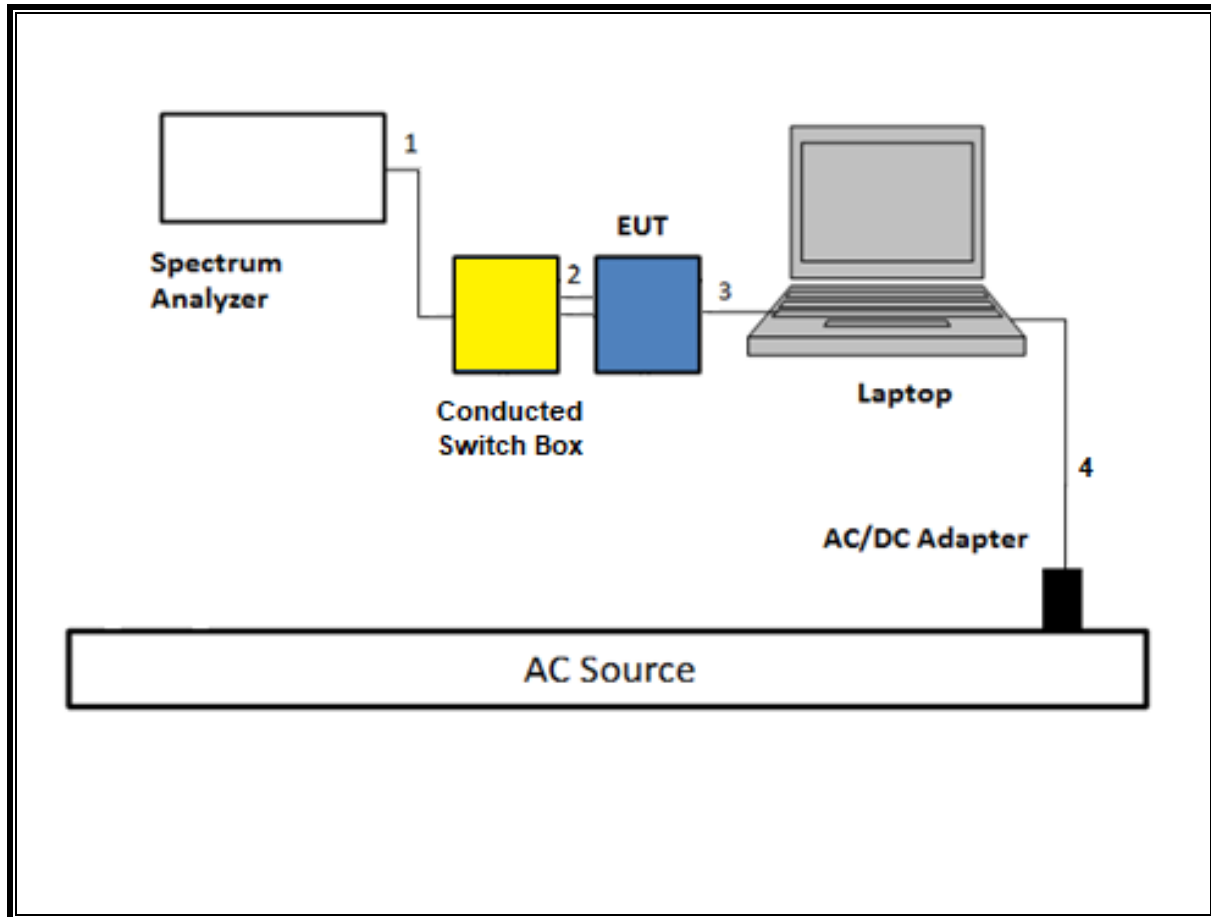SETUP DIAGRAM FOR CONDUCTED TESTS

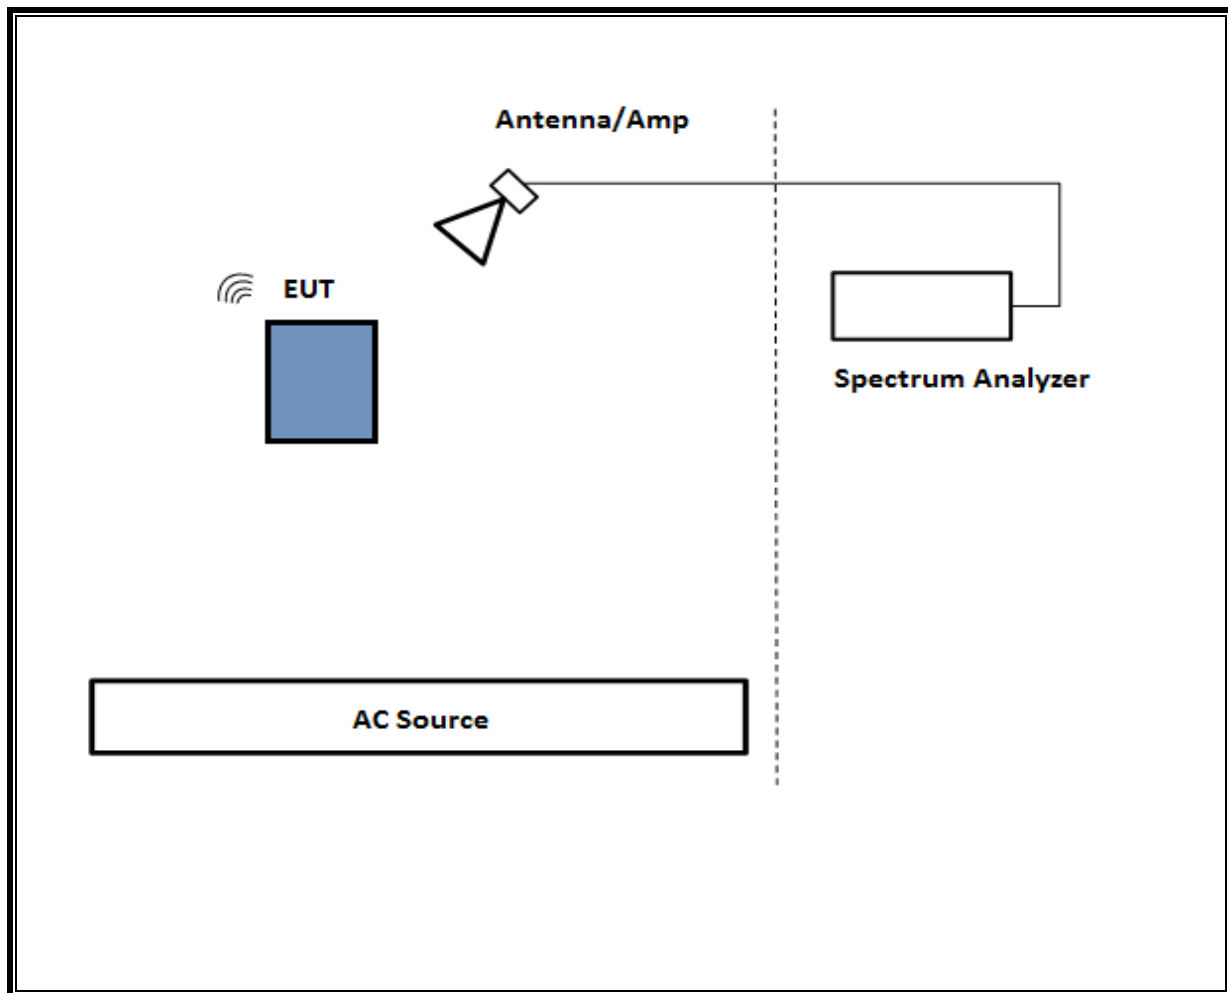SETUP DIAGRAM FOR RADIATED TESTS Above 1 GHz

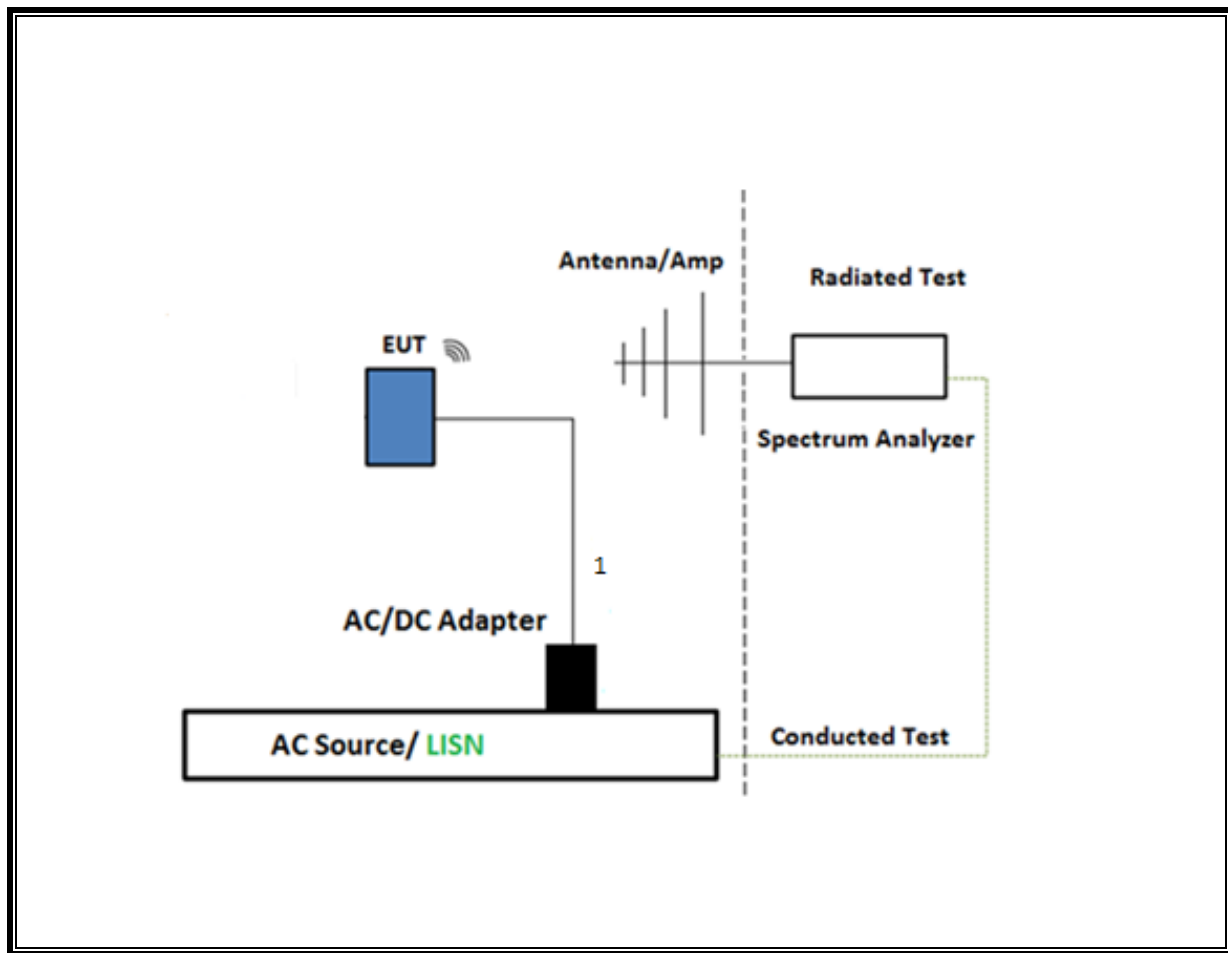SETUP DIAGRAM FOR Below 1GHz and AC LINE CONDUCTED TEST

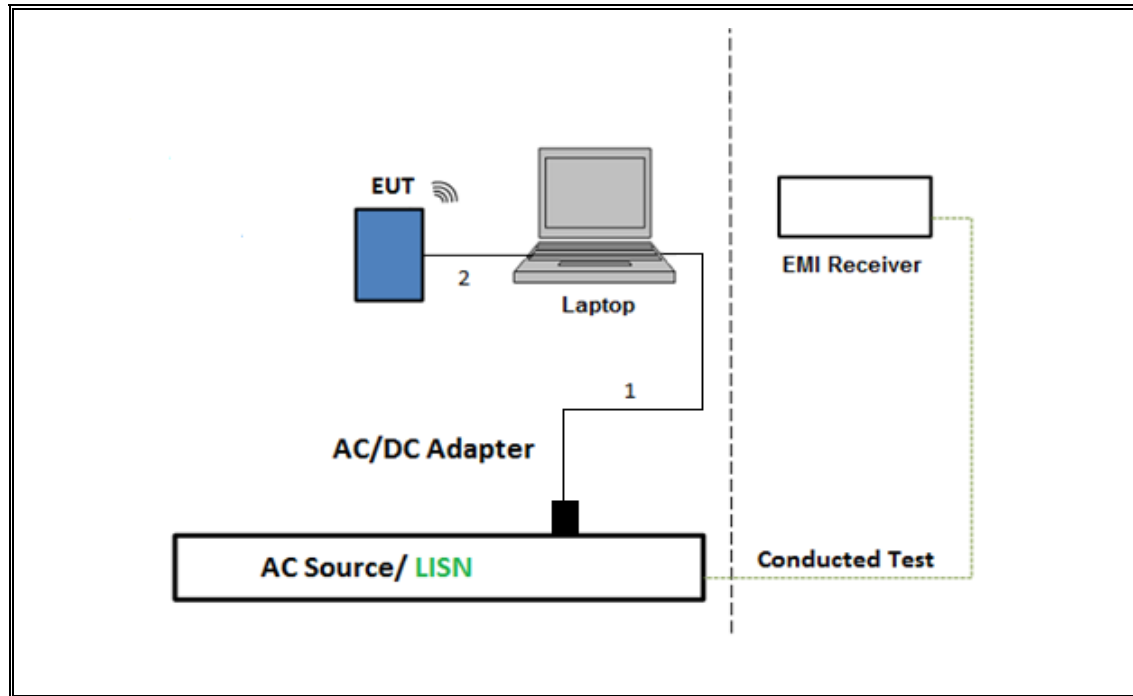TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION

7. MEASUREMENT METHOD

On Time and Duty Cycle: ANSI C63.10 Section 11.6

6 dB BW: ANSI C63.10 Section 11.8.1 $RBW \geq DTS\ BW$

Occupied BW (99%): ANSI C63.10 Section 6.9.3

Output Power: ANSI C63.10 Section 11.9.1.2 Method PKPM1 Peak-reading power meter

Output Power: ANSI C63.10 Section 11.9.2.3.2 Measurement using gated average power meter

PSD: ANSI C63.10 Section 11.10.2 Method PKPSD (peak PSD)

Radiated emissions restricted frequency bands: ANSI C63.10 Section 11.12.1 & Clause 13

Conducted emissions in restricted frequency bands: ANSI C63.10 Section 11.12.2

Band-edge: ANSI C63.10 Section 11.12.2.4 & Clause 13: Peak Measurement

Band-edge: ANSI C63.10 Section 11.12.2.5 & Clause 13: Average Measurement

AC Power Line Conducted Emissions: ANSI C63.10 Section 6.2

Radiated emissions non-restricted frequency bands ANSI C63.10 Section 11.11 & Clause 13

Radiated Spurious Emissions Below 30MHz: ANSI C63.10 Section 6.4 & 13

NOTE: For all conducted antenna port tests for Beamforming, same test procedures from HDR normal modes were applied.

8. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment were utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	ID Num	Cal Due
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	222740	2025/8/31
RF Filter Box, 1-18GHz, 12 Port	UL-FR1	Frankenstein	171389	2026/3/30
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	201497	2026/2/28
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	80707	2026/6/30
RF Filter Box, 1-18GHz, 12 Port	UL-FR1	N/A	171875	2026/3/31
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	245268	2026/2/28
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	226671	2027/7/31
RF Filter Box, 1-18GHz, 17 Ports	UL-FR1	RAT 2	236726	2025/10/31
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	223460	2026/2/28
Amplifier 9 KHz - 1 GHz	SONOMA INSTRUMENT	310N	230311	2026/5/31
Antenna, Broadband Hybrid, 30MHz to 3GHz	Sunol Sciences Corp.	JB3	80813	2025/9/29
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	235670	2026/2/28
Antenna, Passive Loop, 30Hz - 1MHz	Electro-Metrics	EM-6871	170014	2025/8/31
Antenna, Passive Loop, 100kHz to 30MHz	Electro-Metrics	EM-6872	170016	2025/8/31
Amplifier, 9KHz to 1GHz, 32dB	SONOMA INSTRUMENT	310	170649	2025/8/31
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	169937	2026/2/28
Antenna, Horn 18-26.5GHz	A.R.A	MWH-1826/B	172353	2026/7/31
Link File, RF Amplifier Assembly, 18-26.5GHz, 60dB Gain	Ampical	AMP18G26.5-60	220194	2026/4/29
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	226078	2026/2/28
Spectrum Analyzer, PXA, 3Hz to 44GHz	N9030A	Keysight Technologies Inc	80397	2026/01/31
Spectrum Analyzer, PXA, 3Hz to 44GHz	N9030A	Keysight Technologies Inc	125179	2026/02/28
Conducted Switch Box	UL-FR1	CSB	245782	2025/07/31
Conducted Switch Box	UL-FR1	CSB	208281	*2025/05/31
Power Meter, P-series single channel	Keysight Technologies Inc	N1911A	90715	2026/01/31
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Keysight Technologies Inc	N1921A	81319	2026/01/31
Power Meter, P-series single channel	Keysight Technologies Inc	N1911A	90718	2026/01/31
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Keysight Technologies Inc	N1921A	90419	2026/01/31

AC Line Conducted				
Description	Manufacturer	Model	ID Num	Cal Due
EMI Test Receiver 9kHz-7GHz	Rohde & Schwarz	ESR	171646	2026/02/28
LISN for Conducted Emissions CISPR-16	FISCHER CUSTOM COMMUNICATIONS	FCC-LISN-50/250-25-2-01-480V	175765	2026/01/31
Transient Limiter	TE	TBFL1	207996	2025/09/30
UL AUTOMATION SOFTWARE				
Radiated Software	UL	UL EMC	Ver 9.5, May 1, 2023	
Conducted Software	UL	UL EMC	2020.8.16	
AC Line Conducted Software	UL	UL EMC	Ver 9.5, Mar 3, 2023	

*Testing is completed before equipment expiration date.

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.

PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

	B (msec)	(msec)	x (linear)	Cycle (%)	Correction Factor (dB)	Minimum VBW (kHz)
2.4GHz Band						
HDR4	2.916	3.747	0.778	77.82%	1.09	0.343
HDR8	2.925	3.748	0.780	78.03%	1.08	0.342

Note: DCCF is the same for both 1TX and 2TX.

The left screenshot shows the Keysight N9000A Spectrum Analyzer interface. The main display shows a square wave signal at 2.404000 GHz. The signal is labeled 'HDR4'. The duty cycle is measured as 11.03%. The signal is a square wave with a period of 1000 ns and a pulse width of 110.3 ns. The signal is labeled 'HDR4'.

The right screenshot shows the Keysight N9000A Spectrum Analyzer interface. The main display shows a square wave signal at 2.404000 GHz. The signal is labeled 'HDR8'. The duty cycle is measured as 11.13%. The signal is a square wave with a period of 1000 ns and a pulse width of 111.3 ns. The signal is labeled 'HDR8'.

9.2. 99% BANDWIDTH**LIMITS**

None; for reporting purposes only.


RESULTS

Only High-Power modes results are reported; it covers all Low Power modes. Only Mid channel plot is reported to show the analyzer's settings.

9.2.1. HIGH POWER HDR (HDR4)


ANT 4

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2404	2.3576
Middle	2440	2.3503
High	2476	2.3431

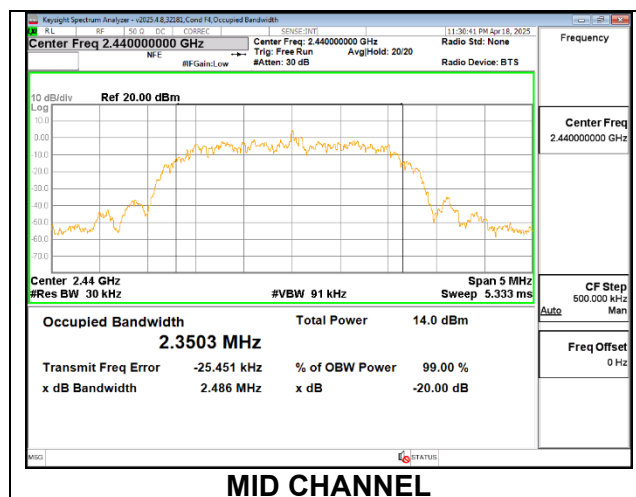


ANT 3

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2404	2.3782
Middle	2440	2.3657
High	2476	2.3511

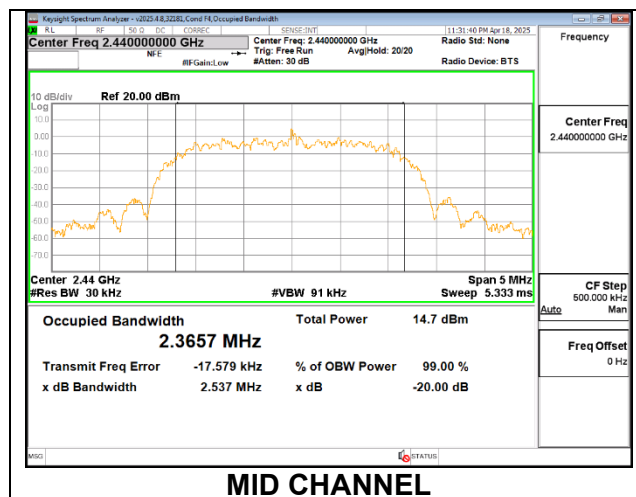

9.2.2. HIGH POWER HDR TXBF (HDR4)


Channel	Frequency (MHz)	99% Bandwidth ANT 4 (MHz)	99% Bandwidth ANT 3 (MHz)
Low	2404	2.3623	2.3841
Middle	2440	2.3678	2.3812
High	2476	2.3734	2.3666

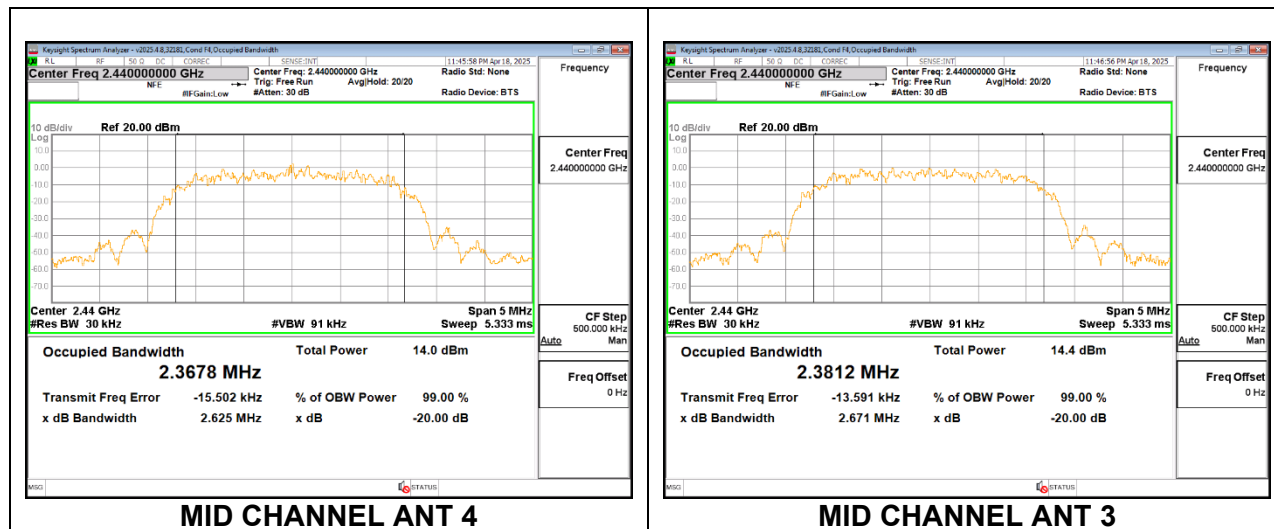

9.2.3. HIGH POWER HDR (HDR8)


ANT 4

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2404	4.6653
Middle	2440	4.6579
High	2476	4.6831

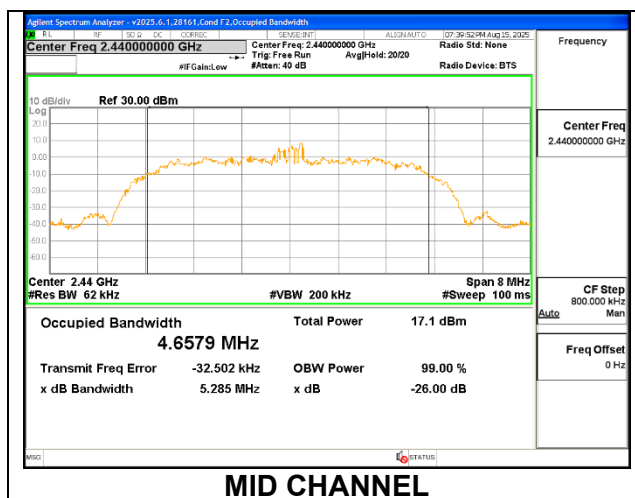



LAT3

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2404	4.6819
Middle	2440	4.6935
High	2476	4.6756

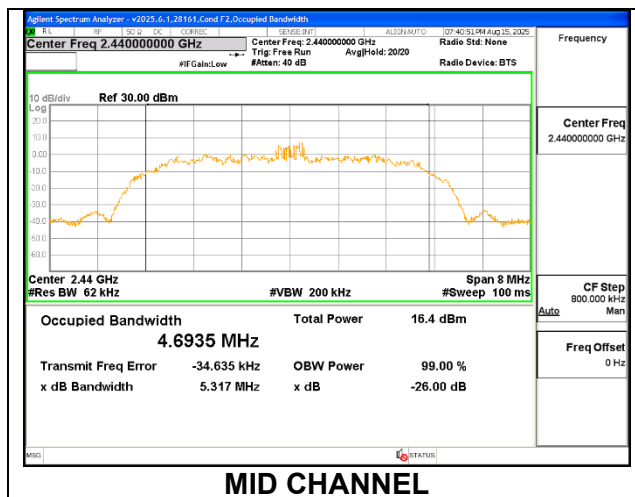

9.2.4. HIGH POWER HDR TXBF (HDR8)

Channel	Frequency (MHz)	99% Bandwidth ANT 4 (MHz)	99% Bandwidth ANT 3 (MHz)
Low	2404	4.6853	4.6899
Middle	2440	4.6723	4.6777
High	2476	4.6628	4.6713

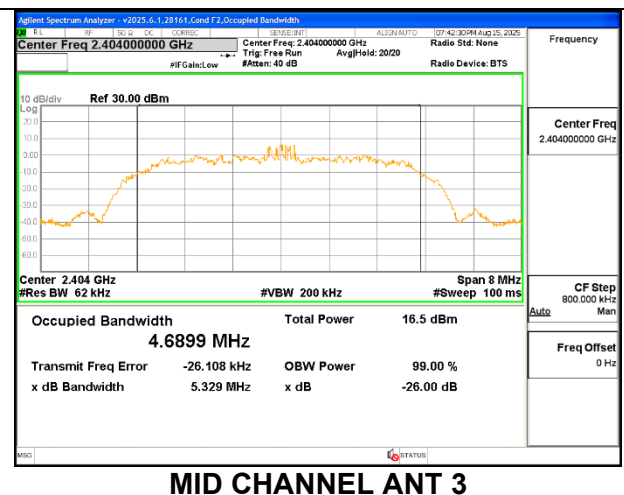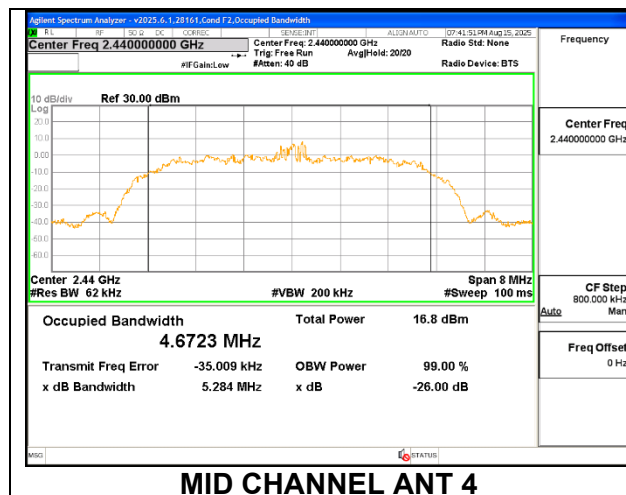

9.3. 6 dB BANDWIDTH

LIMITS

FCC §15.407 (e)

RSS-247 5.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

The 6dB bandwidth was measured for the narrowest bandwidth mode, HDR4, to demonstrate compliance with the minimum required bandwidth of 500 kHz. Other modes were not tested as their bandwidth is greater than the HDR4 mode, as demonstrated by the 99% bandwidth measurements performed on all modes.


Only Mid channel plot is reported to show the analyzer's settings.

Only High-Power modes results are reported; it covers all Low Power modes.

9.3.1. HIGH POWER HDR (HDR4)


ANT 4

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2404	1.650	0.5
Middle	2440	1.490	0.5
High	2476	2.185	0.5

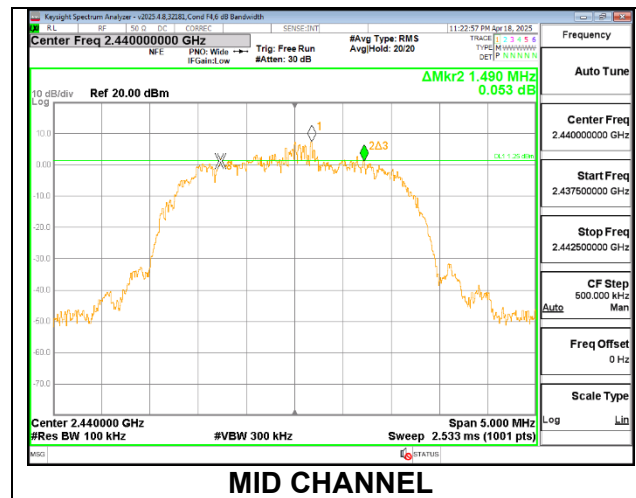

ANT 3

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2404	1.995	0.5
Middle	2440	1.115	0.5
High	2476	1.635	0.5

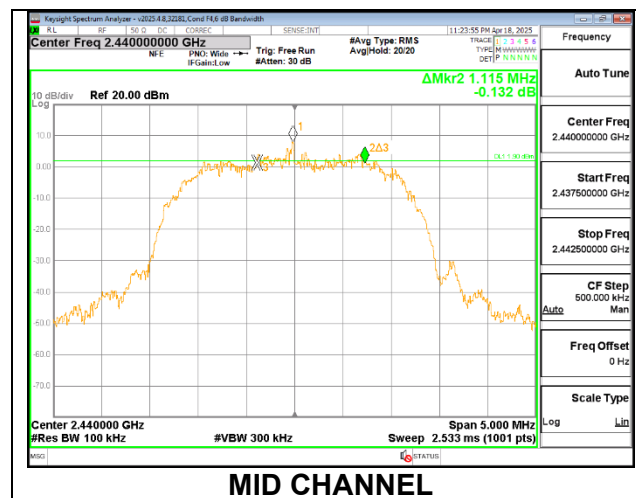

9.4. OUTPUT POWER

LIMITS

FCC §15.247 (b) (3)

RSS-247 5.4 (d)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

Measurements were performed using a wideband RF power meter.

The power output was measured on the EUT antenna port using SMA cable with 10dB attenuator connected to a power meter via wideband power sensor. Peak output power was read directly from the power meter.

DIRECTIONAL ANTENNA GAIN

For 1 TX:

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

For 2 TX:

Tx chains are correlated for power and PSD due to the device supporting Beamforming mode. The directional gains are as follows:

Band (GHz)	ANT 4 Gain (dBi)	ANT 3 Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)	Correlated Chains Directional Gain (dBi)
2.4	0.0	-3.5	-1.41	1.44

Directional Gain Calculation:

ANSI C63.10-2020 section 14.6.3

Uncorrelated directional gain= $10 \cdot \log((10^{(Ant4/10)} + 10^{(Ant3/10)})/2)$

Correlated directional Gain= $10 \cdot \log(((10^{(Ant4/20)} + 10^{(Ant3/20)})^2)/2)$

Sample Calculation:

Ant1= 0.0, Ant2= -3.5

Uncorrelated Antenna gain= $10 \log[(10^{(0/10)} + 10^{(-3.5/10)})/2] = -1.41 \text{ dBi}$

Correlated Antenna gain= $10 \log[(10^{(0/20)} + 10^{(-1.41/20)})^2/2] = 1.44$

RESULTS**9.4.1. HIGH POWER HDR (HDR4)****ANT 4**

Tested By:	32181
Date:	8/15/2025

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	15.77	30	-14.23
Middle	2440	15.75	30	-14.25
High	2476	15.69	30	-14.31

ANT 3

Tested By:	32181
Date:	8/15/2025

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	15.37	30	-14.63
Middle	2440	15.43	30	-14.57
High	2476	15.35	30	-14.65

9.4.2. HIGH POWER HDR TXBF (HDR4)

Tested By:	32181
Date:	8/15/2025

Channel	Frequency (MHz)	Peak Power Reading ANT 4 (dBm)	Peak Power Reading ANT 3 (dBm)	Total Corr'd Power (dBm)	Limit (dBm)	Margin (dB)
Low	2404	16.10	15.79	18.96	30.00	-11.04
Middle	2440	15.93	15.65	18.80	30.00	-11.20
High	2476	16.12	15.79	18.97	30.00	-11.03

9.4.3. HIGH POWER HDR (HDR8)**ANT 4**

Tested By:	32181
Date:	7/4/2025

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	15.92	30	-14.08
Middle	2440	15.89	30	-14.11
High	2476	15.86	30	-14.14

ANT 3

Tested By:	32181
Date:	7/4/2025

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	15.72	30	-14.28
Middle	2440	15.62	30	-14.38
High	2476	15.68	30	-14.32

9.4.4. HIGH POWER HDR TXBF (HDR8)

Tested By:	32181
Date:	7/4/2025

Channel	Frequency (MHz)	Peak Power Reading ANT 4 (dBm)	Peak Power Reading ANT 3 (dBm)	Total Corr'd Power (dBm)	Limit (dBm)	Margin (dB)
Low	2404	15.99	15.69	18.85	30.00	-11.15
Middle	2440	15.85	15.71	18.79	30.00	-11.21
High	2476	16.09	15.69	18.90	30.00	-11.10

9.4.5. LOW POWER HDR (HDR4)**ANT 4**

Tested By:	32181
Date:	7/4/2025

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	8.16	30	-21.84
Middle	2440	8.04	30	-21.96
High	2476	8.22	30	-21.78

ANT 3

Tested By:	32181
Date:	7/4/2025

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	8.58	30	-21.42
Middle	2440	8.66	30	-21.34
High	2476	8.29	30	-21.71

9.4.6. LOW POWER HDR TXBF (HDR4)

Tested By:	32181
Date:	7/4/2025

Channel	Frequency (MHz)	Peak Power Reading ANT 4 (dBm)	Peak Power Reading ANT 3 (dBm)	Total Corr'd Power (dBm)	Limit (dBm)	Margin (dB)
Low	2404	8.18	8.65	11.43	30.00	-18.57
Middle	2440	8.14	8.68	11.43	30.00	-18.57
High	2476	8.04	8.68	11.38	30.00	-18.62

9.4.7. LOW POWER HDR (HDR8)**ANT 4**

Tested By:	32181
Date:	7/4/2025

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	8.04	30	-21.96
Middle	2440	8.01	30	-21.99
High	2476	8.14	30	-21.86

ANT 3

Tested By:	32181
Date:	7/4/2025

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	8.70	30	-21.30
Middle	2440	8.42	30	-21.58
High	2476	8.68	30	-21.32

9.4.8. LOW POWER HDR TXBF (HDR8)

Tested By:	32181
Date:	7/4/2025

Channel	Frequency (MHz)	Peak Power Reading ANT 4 (dBm)	Peak Power Reading ANT 3 (dBm)	Total Corr'd Power (dBm)	Limit (dBm)	Margin (dB)
Low	2404	8.22	8.68	11.47	30.00	-18.53
Middle	2440	8.06	8.65	11.38	30.00	-18.62
High	2476	8.05	8.66	11.38	30.00	-18.62

9.5. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements were performed using a wideband RF power meter.

The power output was measured on the EUT antenna port using SMA cable with 10dB attenuator connected to a power meter via wideband average power sensor. Gated average output power was read directly from power meter.

RESULTS

9.5.1. HIGH POWER HDR (HDR4)**ANT 4**

Tested By:	32181
Date:	7/4/2025

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	13.23
Middle	2440	13.21
High	2476	13.23

ANT 3

Tested By:	32181
Date:	7/4/2025

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	12.91
Middle	2440	12.98
High	2476	12.95

9.5.2. HIGH POWER HDR TXBF (HDR4)

Tested By:	32181
Date:	7/4/2025

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2404	13.15	12.99	16.08
Middle	2440	13.13	12.97	16.06
High	2476	13.16	12.96	16.07

9.5.3. HIGH POWER HDR (HDR8)**ANT 4**

Tested By:	32181
Date:	7/4/2025

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	13.22
Middle	2440	13.23
High	2476	13.22

ANT 3

Tested By:	32181
Date:	7/4/2025

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	12.97
Middle	2440	12.98
High	2476	12.94

9.5.4. HIGH POWER HDR TXBF (HDR8)

Tested By:	32181
Date:	7/4/2025

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2404	13.13	12.99	16.07
Middle	2440	13.08	12.95	16.03
High	2476	13.14	12.94	16.05

9.5.5. LOW POWER HDR (HDR4)**ANT 4**

Tested By:	32181
Date:	7/4/2025

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	5.49
Middle	2440	5.41
High	2476	5.36

ANT 3

Tested By:	32181
Date:	7/4/2025

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	5.93
Middle	2440	5.98
High	2476	5.80

9.5.6. LOW POWER HDR TXBF (HDR4)

Tested By:	32181
Date:	7/4/2025

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2404	5.41	5.95	8.70
Middle	2440	5.42	5.99	8.72
High	2476	5.39	5.88	8.65

9.5.7. LOW POWER HDR (HDR8)**ANT 4**

Tested By:	32181
Date:	7/4/2025

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	5.49
Middle	2440	5.37
High	2476	5.47

ANT 3

Tested By:	32181
Date:	7/4/2025

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	5.99
Middle	2440	5.86
High	2476	5.99

9.5.8. LOW POWER HDR TXBF (HDR8)

Tested By:	32181
Date:	7/4/2025

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2404	5.39	5.91	8.67
Middle	2440	5.39	5.98	8.71
High	2476	5.40	5.90	8.67

9.6. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

RSS-247 (5.2) (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


RESULTS

Only High-Power modes results are reported; it covers all Low Power modes.

9.6.1. HIGH POWER HDR (HDR4)


ANT 4

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-1.009	8	-9.01
Middle	2440	-1.094	8	-9.09
High	2476	-1.089	8	-9.09

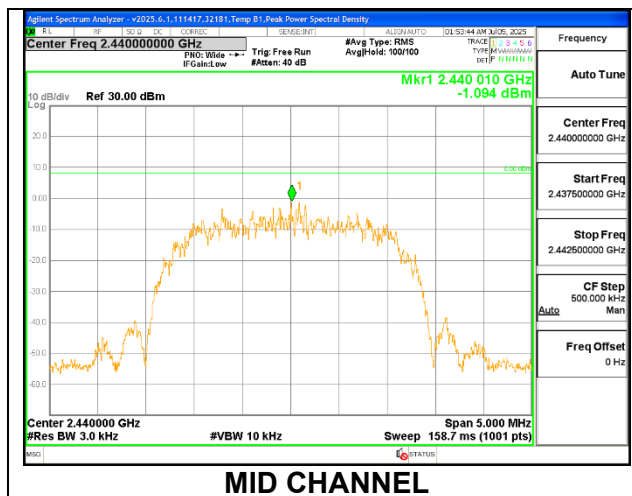

ANT 3

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-1.425	8	-9.43
Middle	2441	-1.041	8	-9.04
High	2478	-1.240	8	-9.24

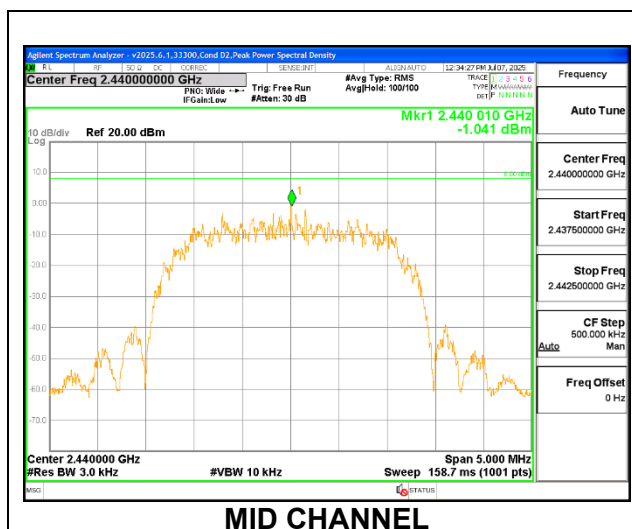


9.6.2. HIGH POWER HDR TXBF (HDR4)

Note: Test procedures and setting are the same as HDR normal mode.

PSD Results


Channel	Frequency (MHz)	ANT 4 Meas (dBm/ 3kHz)	ANT 3 Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Low	2404	-1.080	-1.357	1.79	8.0	-6.2
Mid	2440	-1.286	-0.921	1.91	8.0	-6.1
High	2476	-1.411	-1.376	1.62	8.0	-6.4

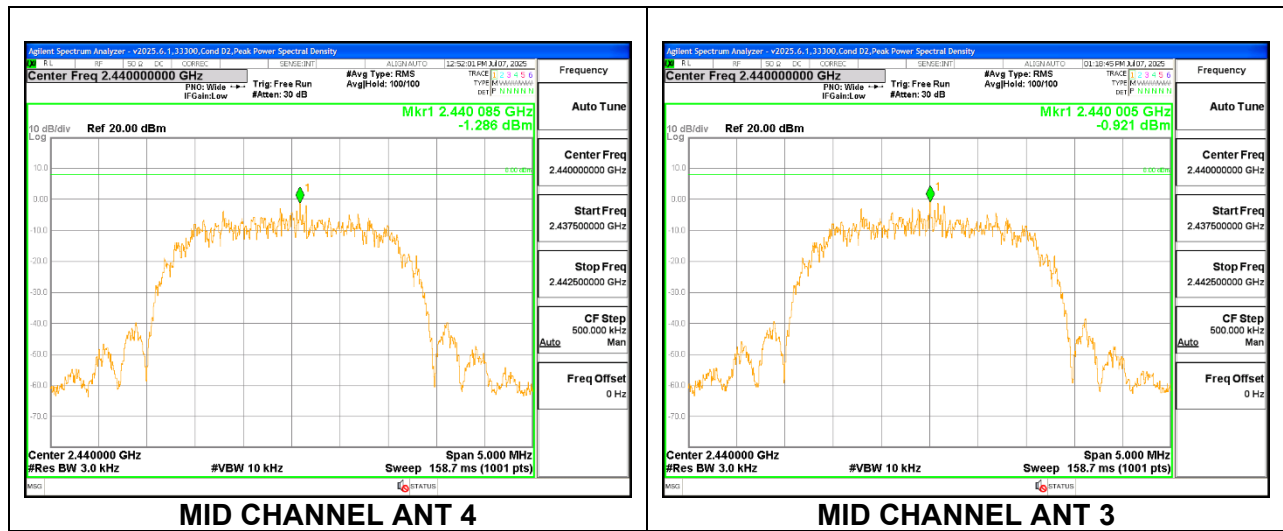

9.6.3. HIGH POWER HDR (HDR8)


ANT 4

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-2.778	8	-10.78
Middle	2440	-2.865	8	-10.87
High	2476	-2.744	8	-10.74

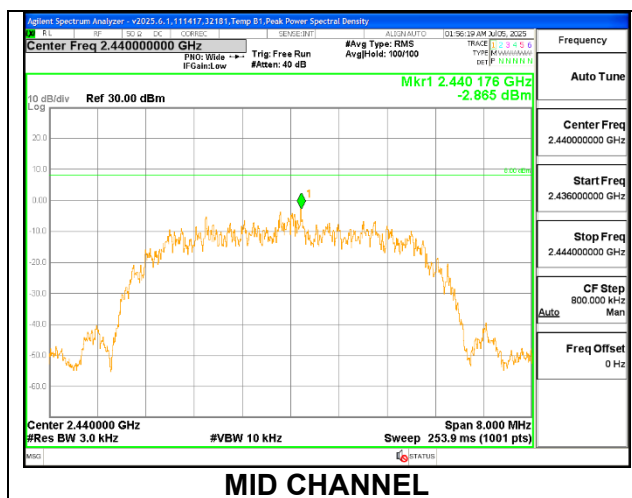

ANT 3

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-2.665	8	-10.67
Middle	2440	-2.891	8	-10.89
High	2476	-2.830	8	-10.83

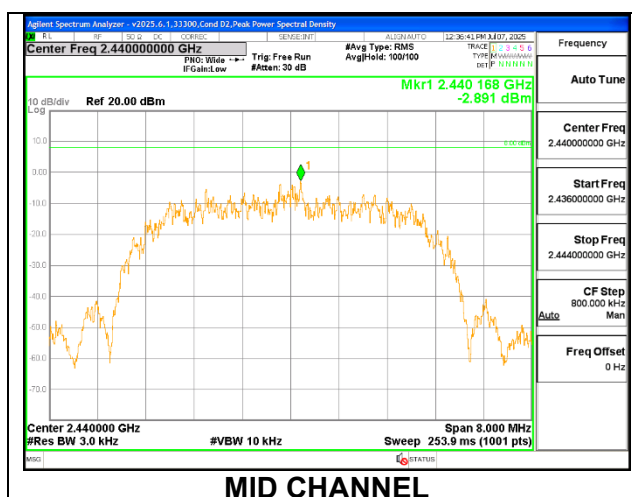


9.6.4. HIGH POWER HDR TXBF (HDR8)

Note: Test procedures and setting are the same as HDR normal mode.

PSD Results

Channel	Frequency (MHz)	ANT 4 Meas (dBm/ 3kHz)	ANT 3 Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Low	2404	-2.890	-2.949	0.09	8.0	-7.9
Mid	2440	-2.753	-2.958	0.16	8.0	-7.8
High	2476	-2.548	-2.897	0.29	8.0	-7.7

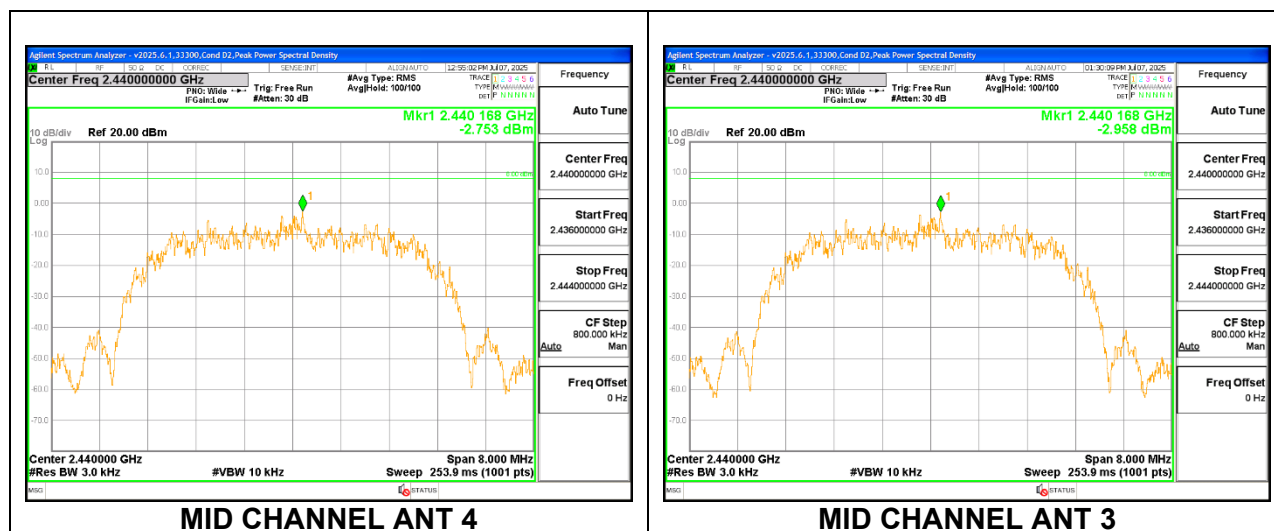

9.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)


RSS-247 5.5

Output power was measured based on the use of a peak measurement; therefore, the required attenuation is 20 dBc.


RESULTS

9.7.1. HIGH POWER HDR (HDR4)


ANT 4

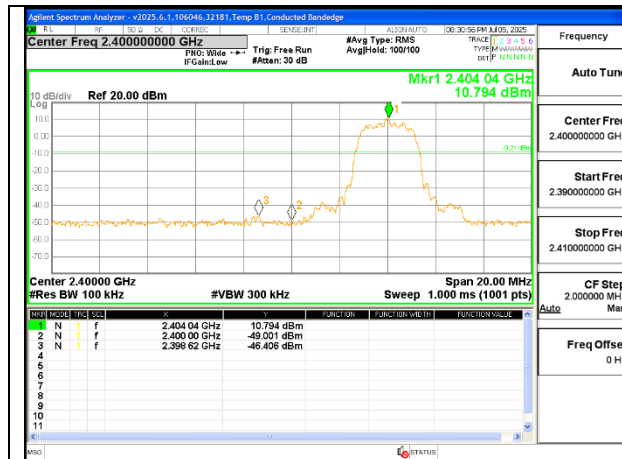


LOW CHANNEL BANDEDGE

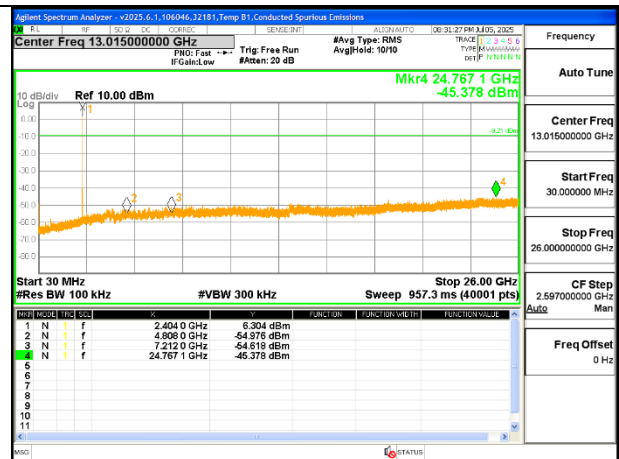


OUT-OF-BAND LOW CHANNEL

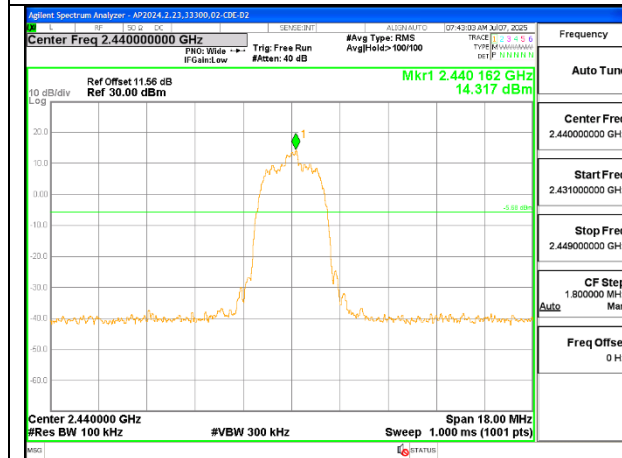


IN-BAND REFERENCE LEVEL

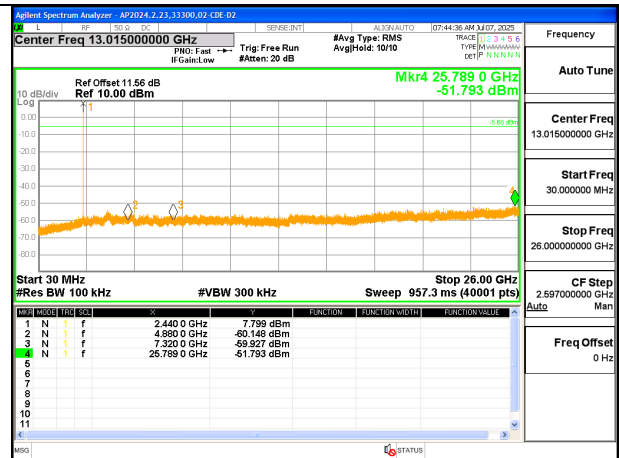


OUT-OF-BAND MID CHANNEL

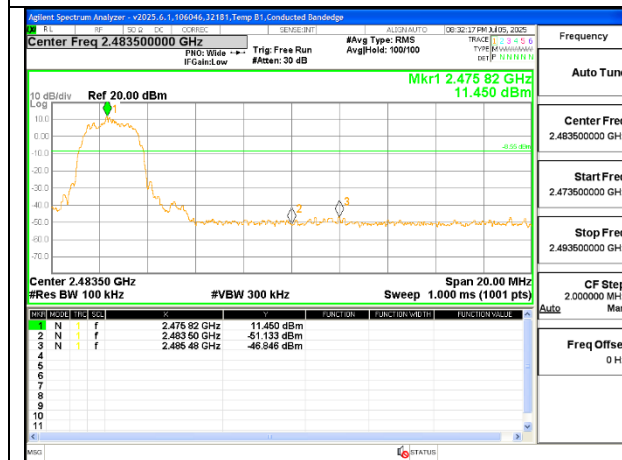

HIGH CHANNEL BANDEDGE

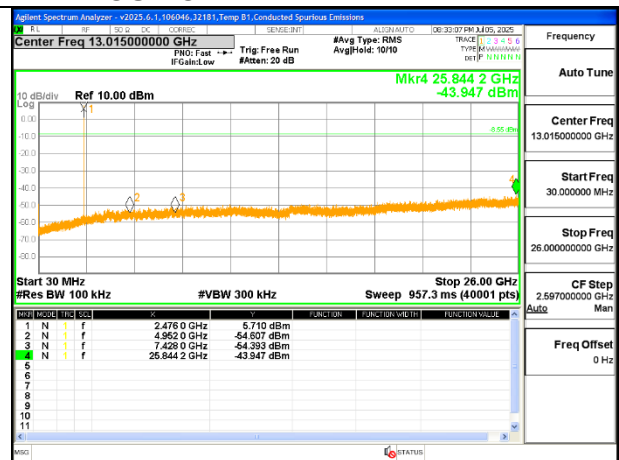


OUT-OF-BAND HIGH CHANNEL

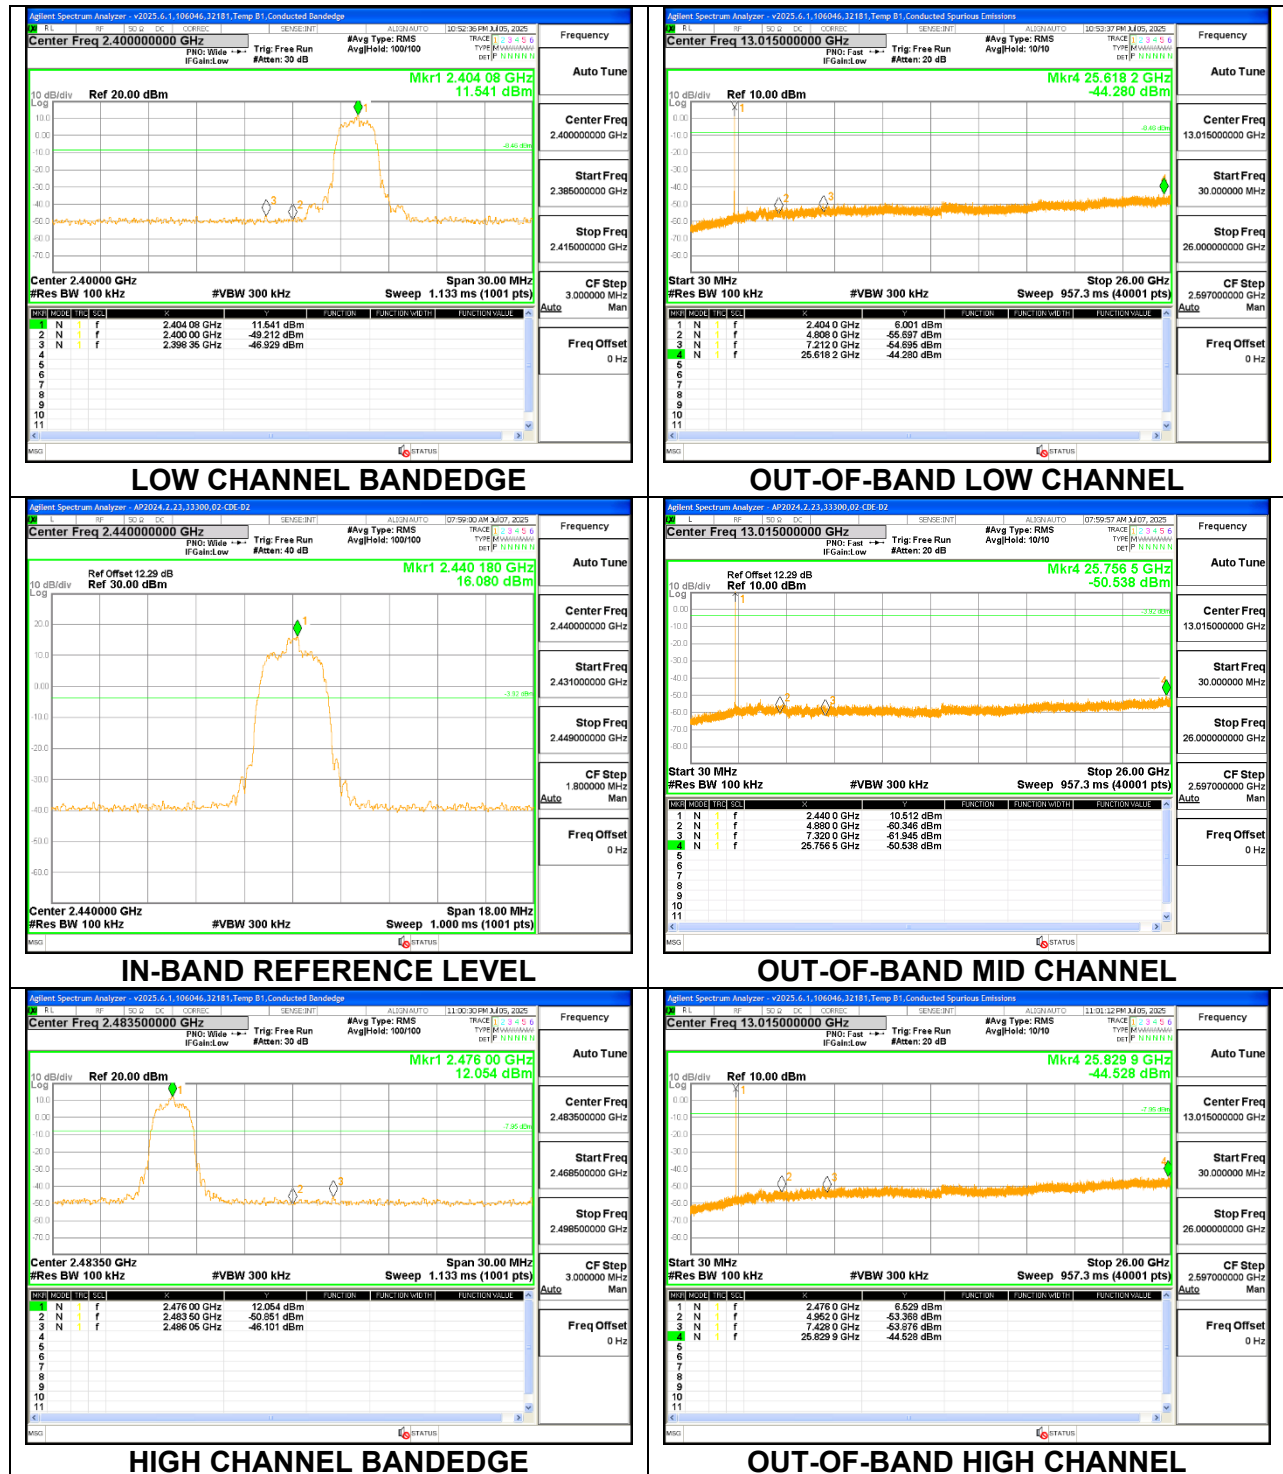
ANT 3

9.7.2. HIGH POWER HDR TXBF (HDR4)


ANT 4

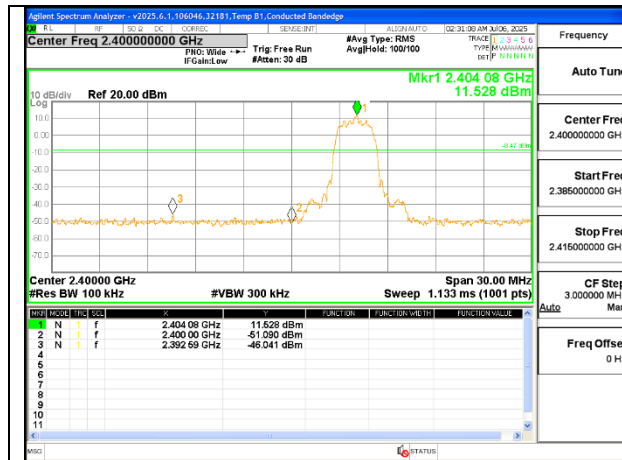


LOW CHANNEL BANDEDGE ANT 4

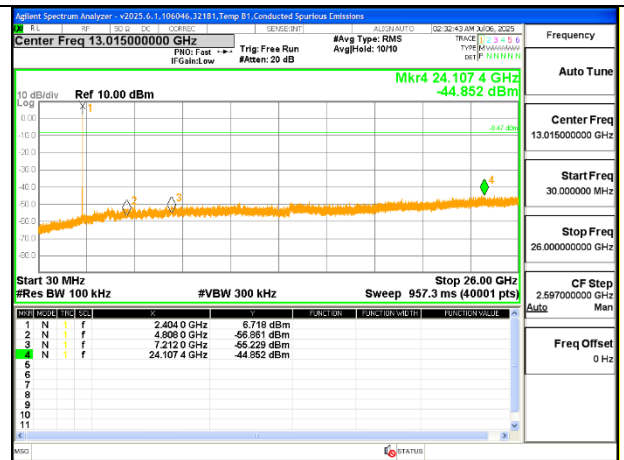


OUT-OF-BAND LOW CHANNEL ANT 4

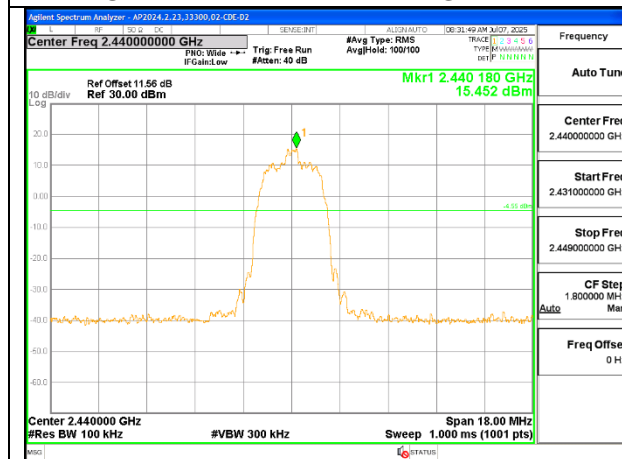


IN-BAND REFERENCE LEVEL ANT 4

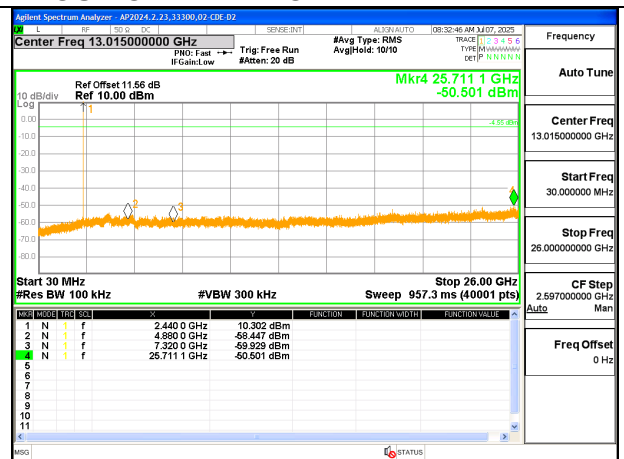


OUT-OF-BAND MID CHANNEL ANT 4

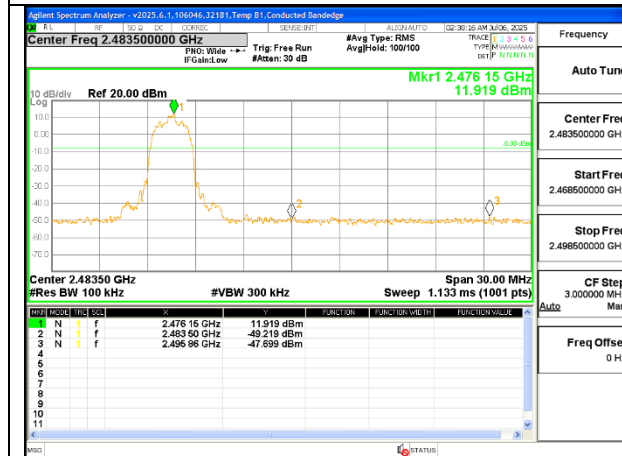

HIGH CHANNEL BANDEDGE ANT 4

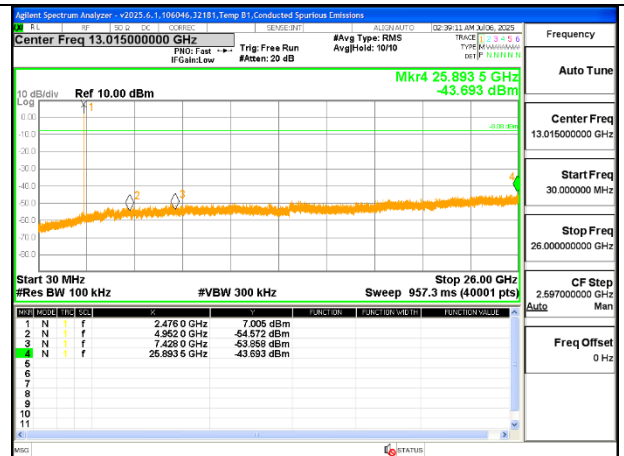








OUT-OF-BAND HIGH CHANNEL ANT 4

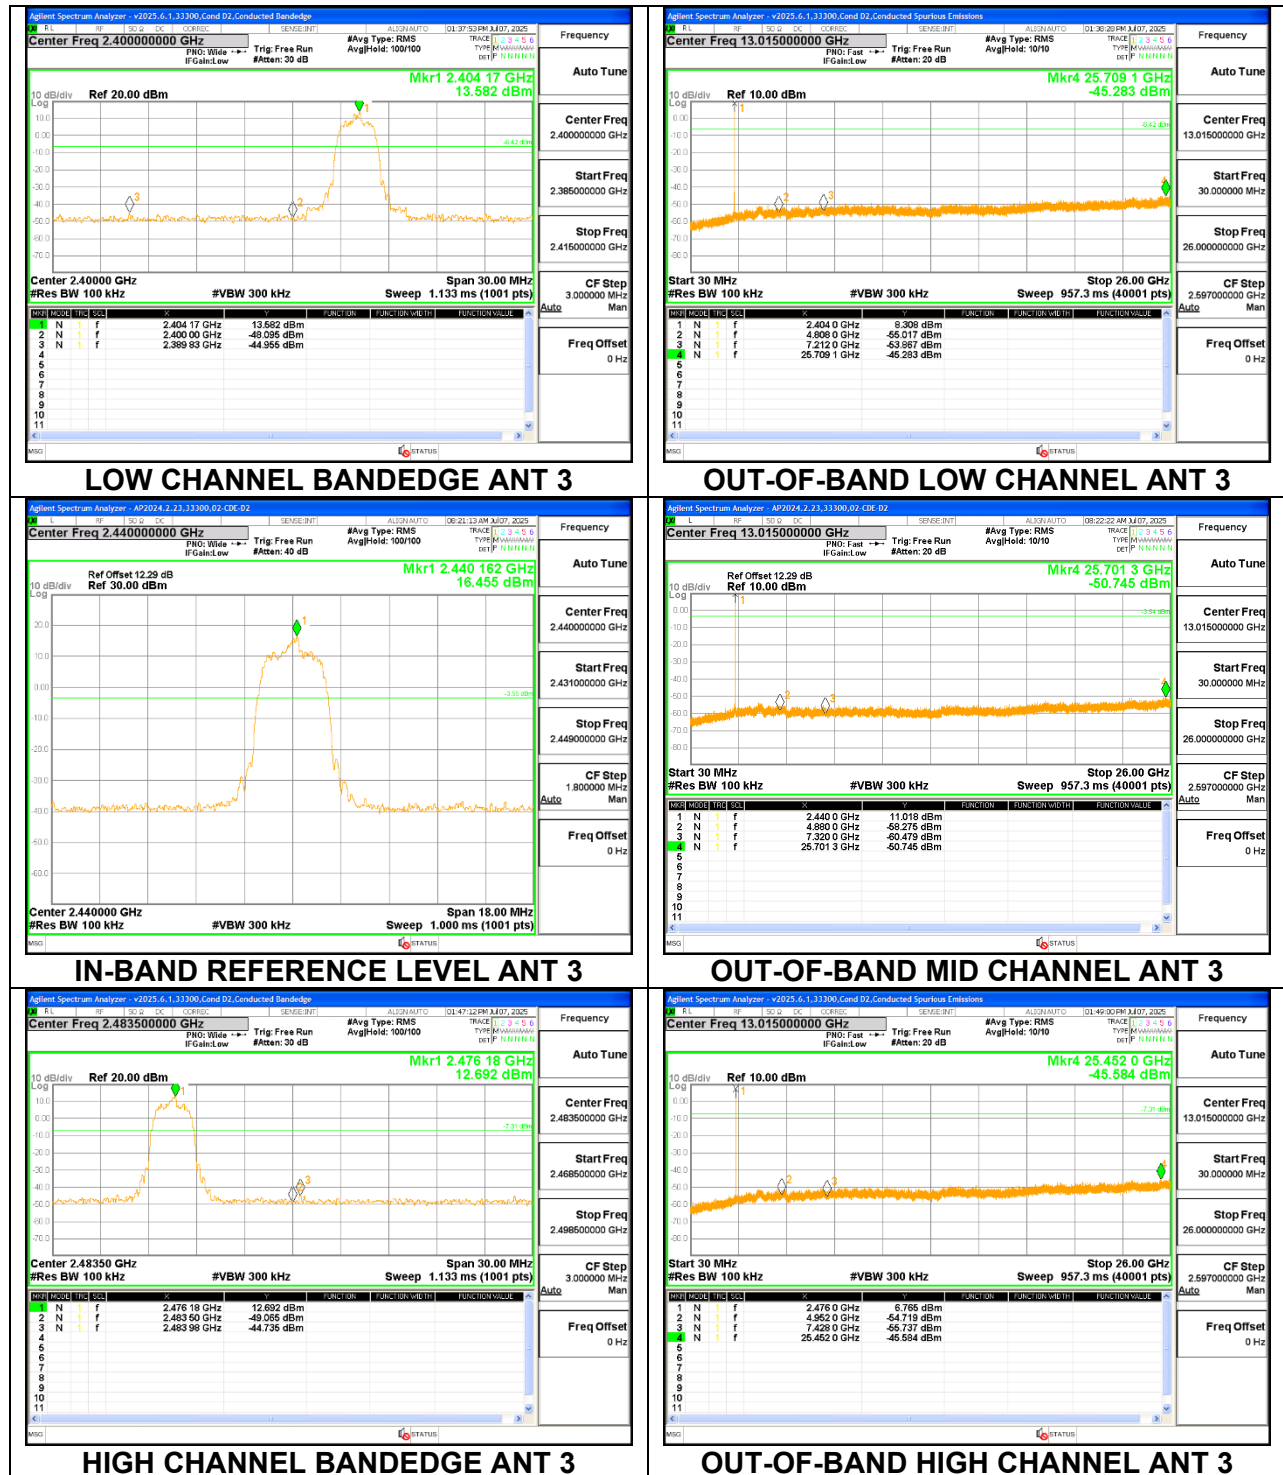ANT 3

9.7.3. HIGH POWER HDR (HDR8)


ANT 4

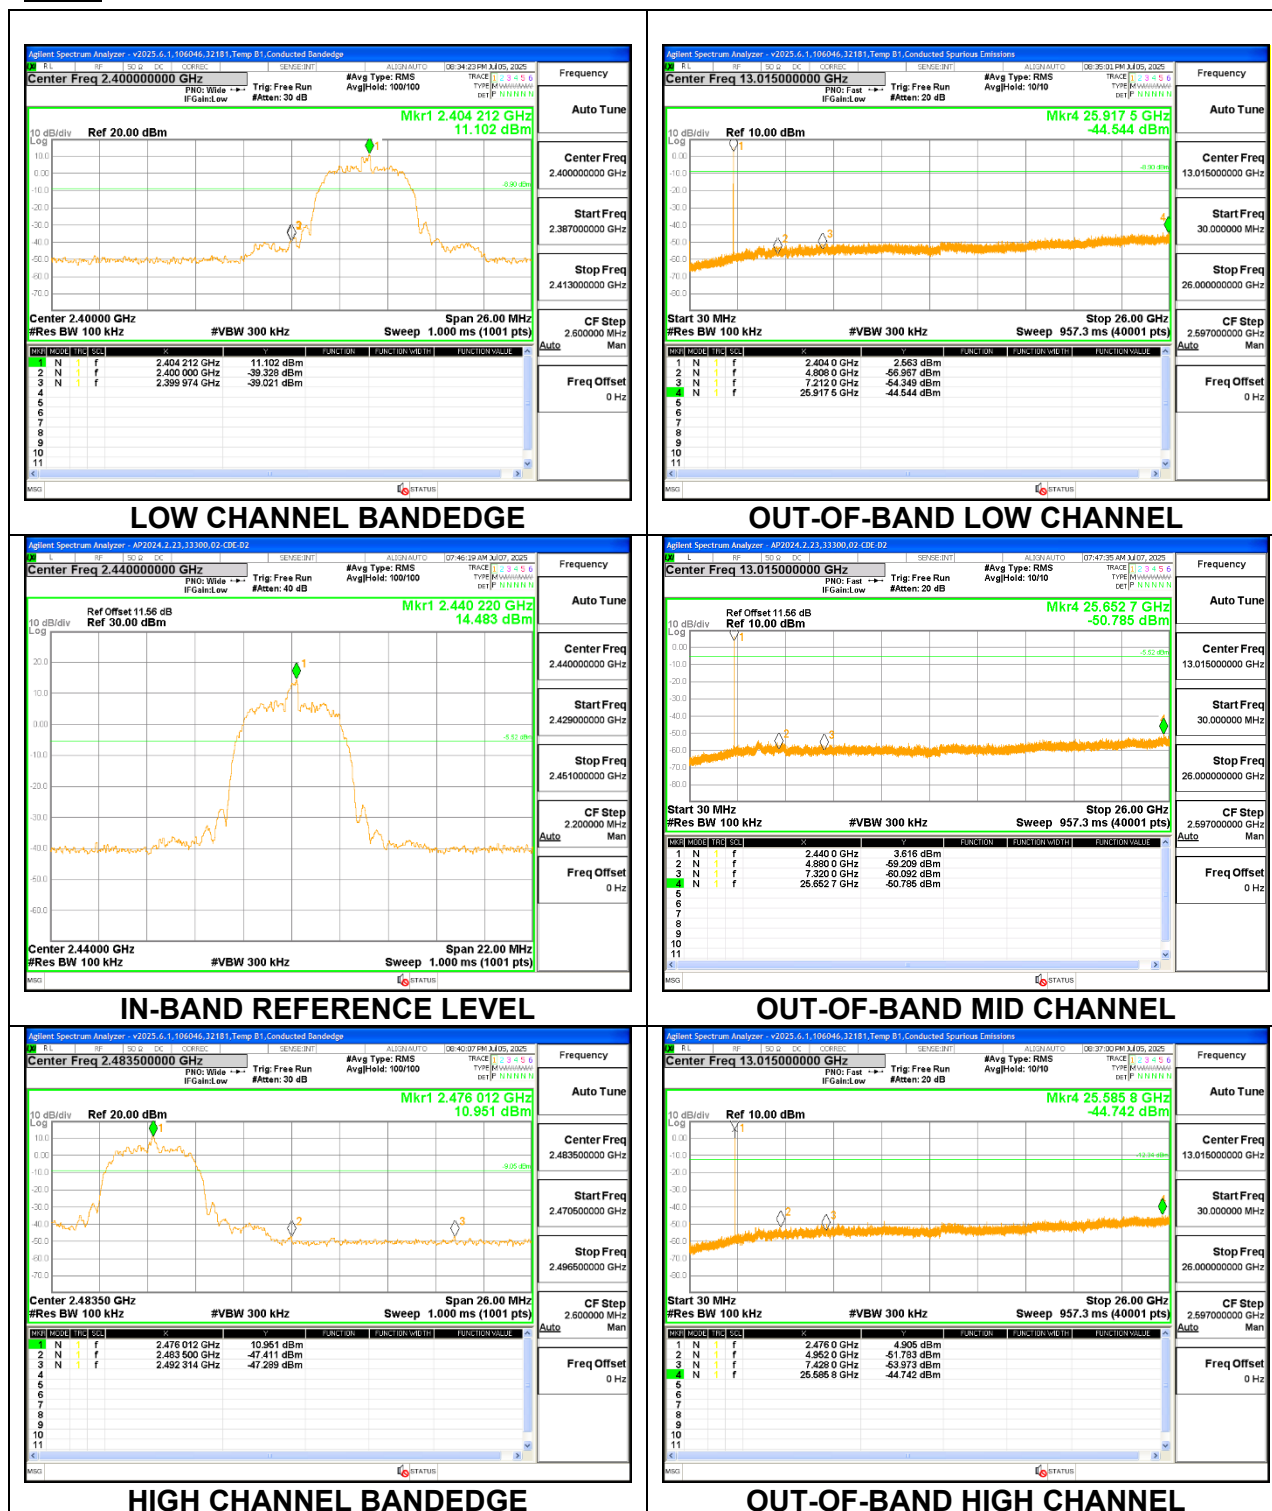

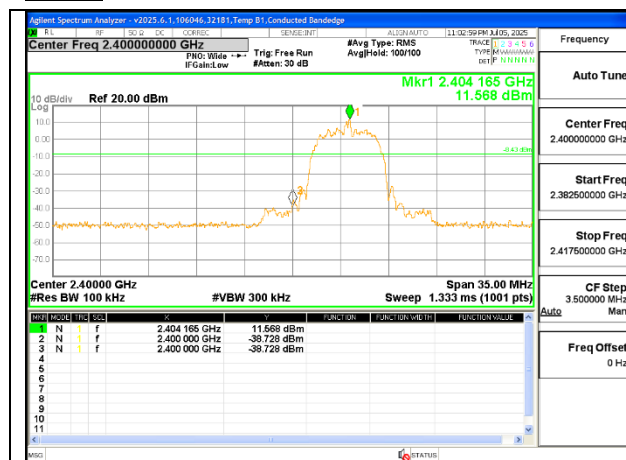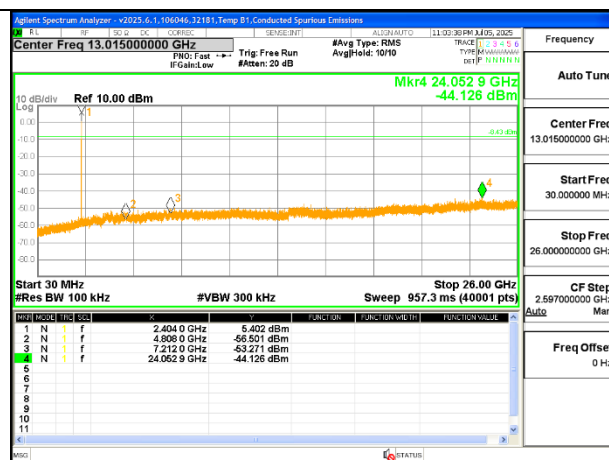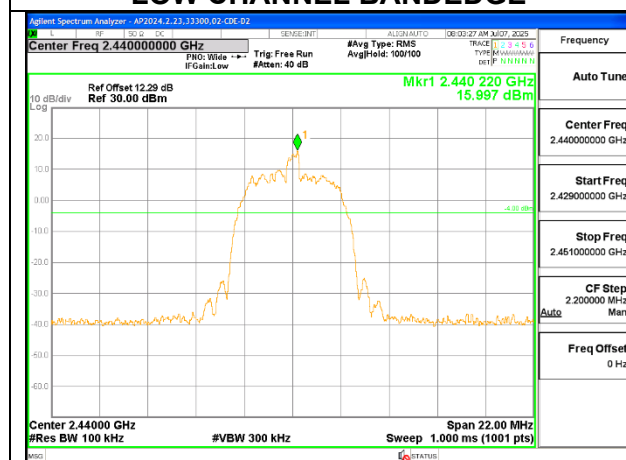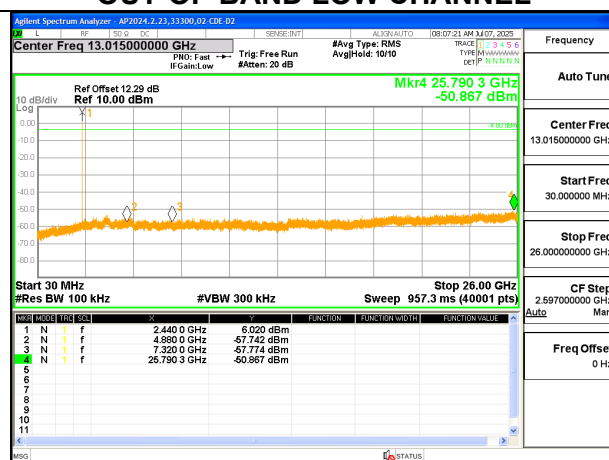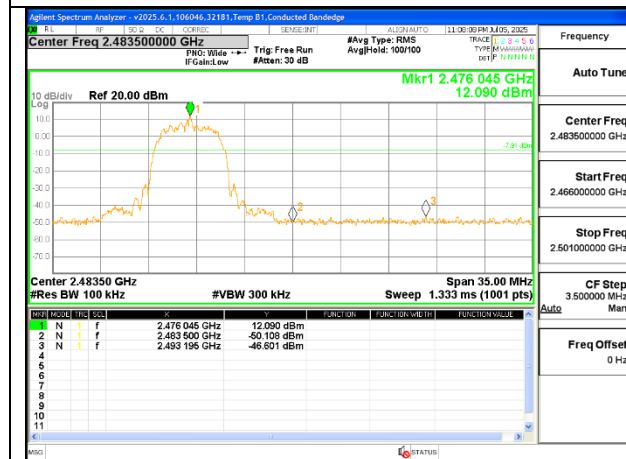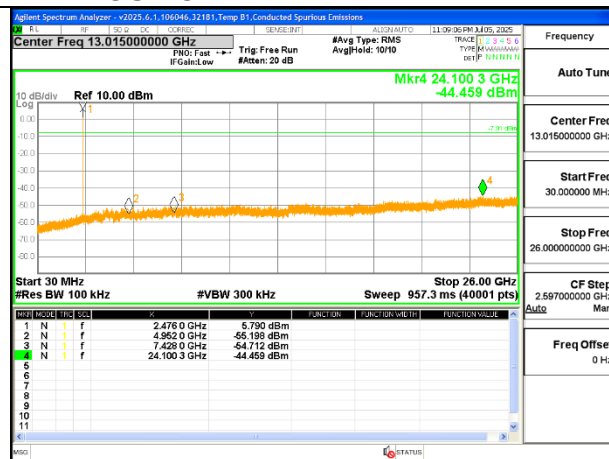
ANT 3**LOW CHANNEL BANDEDGE****OUT-OF-BAND LOW CHANNEL****IN-BAND REFERENCE LEVEL****OUT-OF-BAND MID CHANNEL****HIGH CHANNEL BANDEDGE****OUT-OF-BAND HIGH CHANNEL**

9.7.4. HIGH POWER HDR TXBF (HDR8)


ANT 4

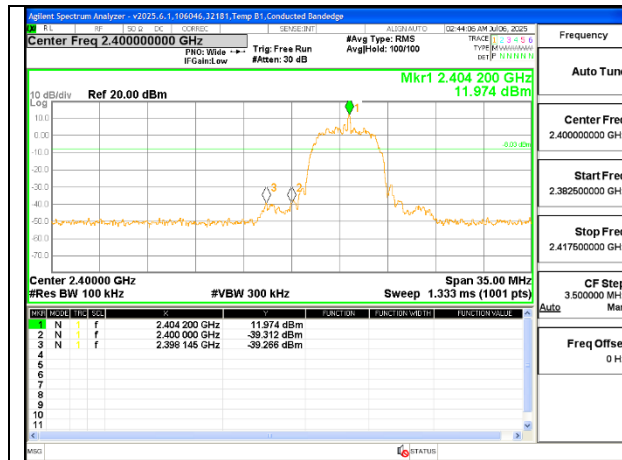


LOW CHANNEL BANDEDGE ANT 4

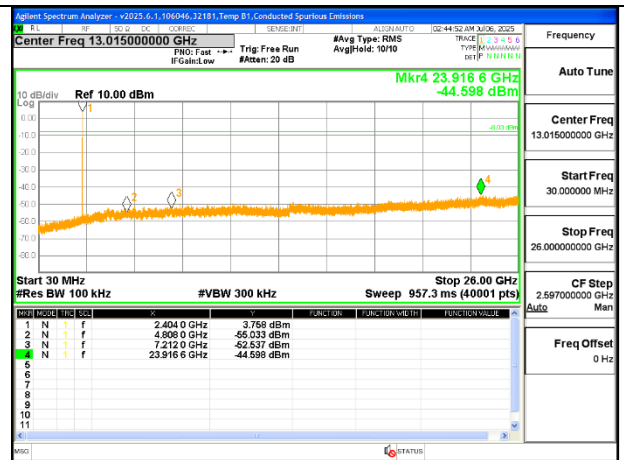


OUT-OF-BAND LOW CHANNEL ANT 4

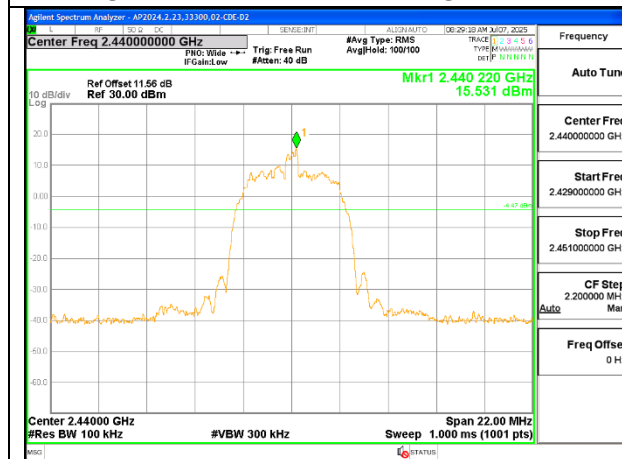


IN-BAND REFERENCE LEVEL ANT 4

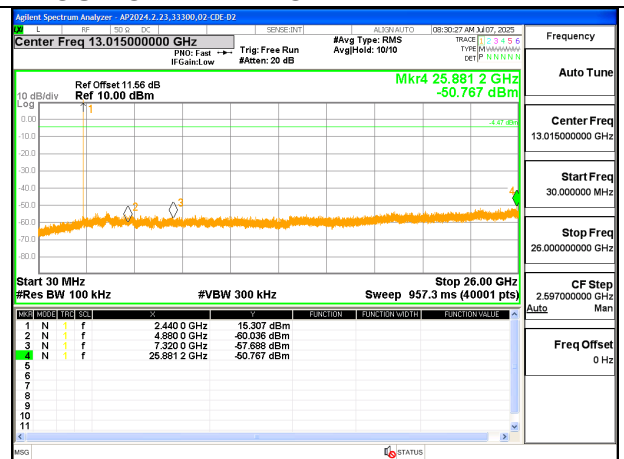

OUT-OF-BAND MID CHANNEL ANT 4

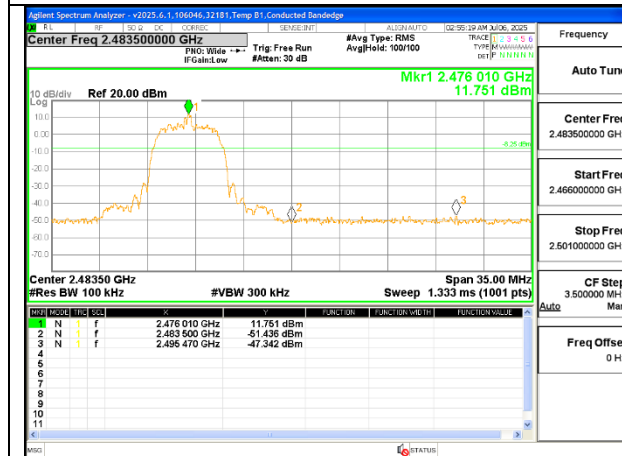


HIGH CHANNEL BANDEDGE ANT 4

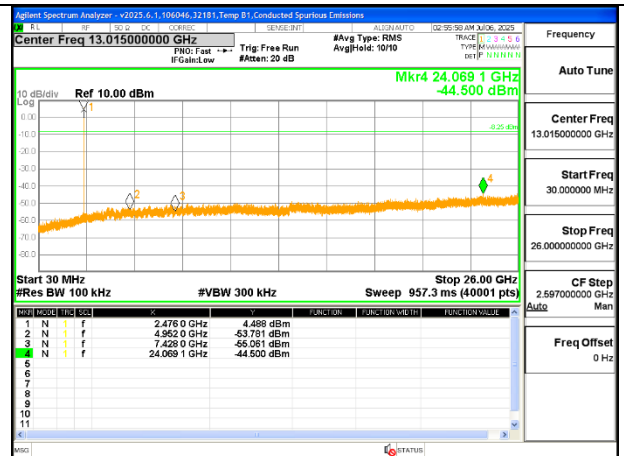


OUT-OF-BAND HIGH CHANNEL ANT 4


ANT 3

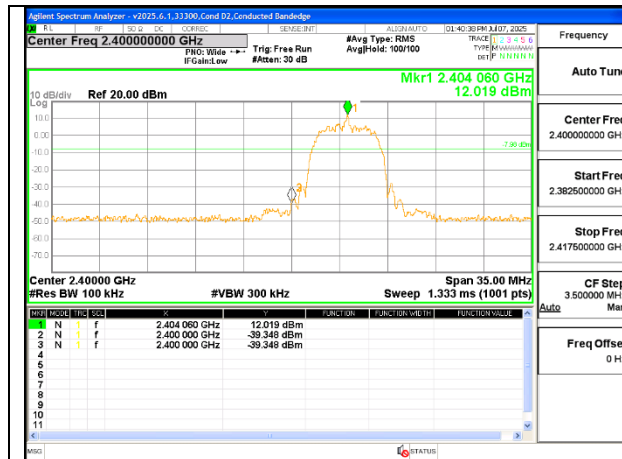


LOW CHANNEL BANDEDGE ANT 3

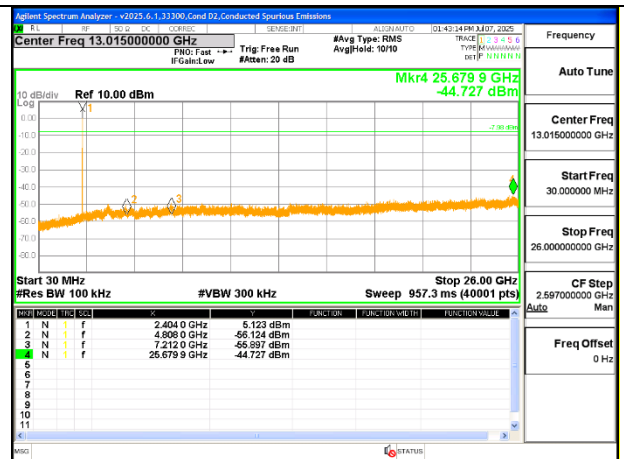


OUT-OF-BAND LOW CHANNEL ANT 3

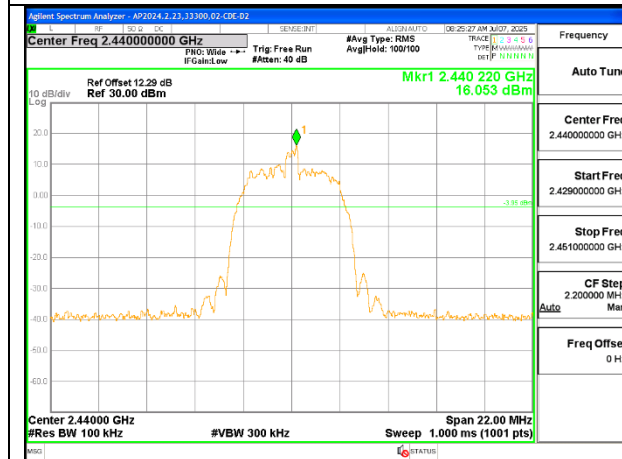


IN-BAND REFERENCE LEVEL ANT 3

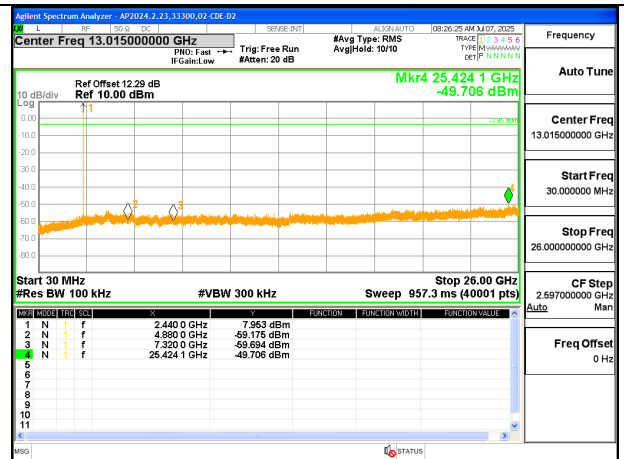

OUT-OF-BAND MID CHANNEL ANT 3

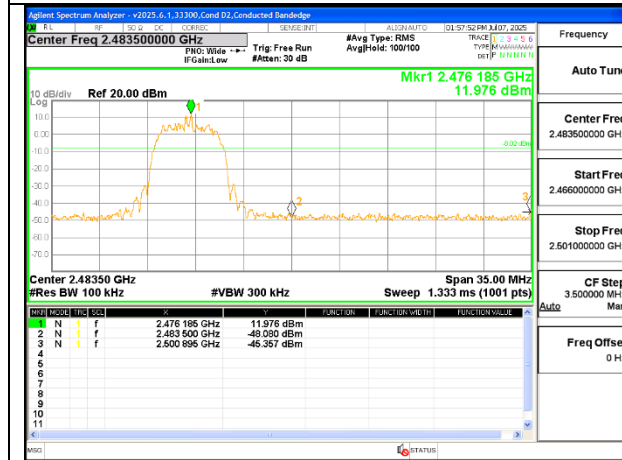

HIGH CHANNEL BANDEDGE ANT 3

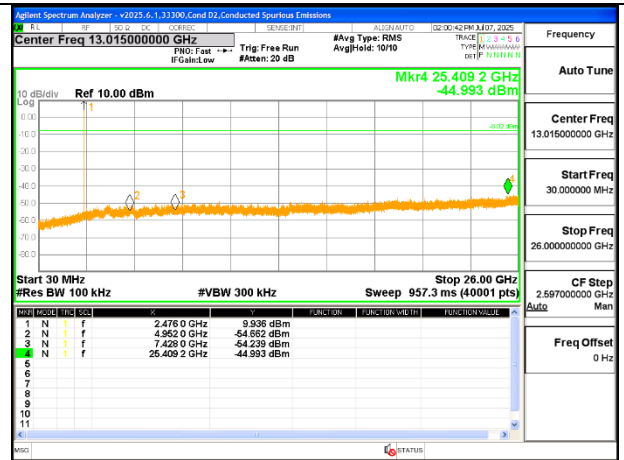

OUT-OF-BAND HIGH CHANNEL ANT 3

9.7.5. LOW POWER HDR (HDR4)

ANT 4

