

RADIATED TEST REPORT

Report Number: 15496249-E12V1 & E13V1

Applicant : APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A3257 (Parent)
A3525, A3526, A3527 (Variants)

Brand : APPLE

FCC ID : BCG-E8950A (Parent)
BCG-E8960A, BCG-E8961A, BCG-E8962A (Variants)

IC : 579C-E8950A (Parent)
579C-E8960A, 579C-E8961A, 579C-E8962A (Variants)

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART E
ISED RSS-248 ISSUE 3
ISED RSS-GEN ISSUE 5 + A1 + A2

Date Of Issue:
2025-08-01

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



TABLE OF CONTENTS

1. RADIATED TEST RESULTS	3
1.1. TRANSMITTER OUTSIDE 5.925 - 7.125 GHz, 1- 18GHz (Dual Client)	5
1.1.1. 802.11be SISO SU MODE IN UNII-5 BAND – BANDEDGE	5
1.1.2. 802.11be SISO PARTIAL RU MODE IN UNII-5 BAND - BANDEDGE	8
1.1.3. 802.11be MIMO SU MODE IN UNII-5 BAND - BANDEDGE	11
1.1.4. 802.11be MIMO PARTIAL RU MODE IN UNII-5 BAND - BANDEDGE	14
1.1.5. 802.11be MIMO MODE IN UNII-5 BAND – SPURIOUS EMISSIONS	17
1.1.6. 802.11be MIMO MODE IN UNII-6 BAND – SPURIOUS EMISSIONS	29
1.1.7. 802.11be MIMO MODE IN UNII-7 BAND – SPURIOUS EMISSIONS	41
1.1.8. 802.11a SISO MODE IN UNII-8 BAND – BANDEDGE	53
1.1.9. 802.11be SISO SU MODE IN UNII-8 BAND – BANDEDGE	56
1.1.10. 802.11be SISO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE	59
1.1.11. 802.11a MIMO MODE IN UNII-8 BAND – BANDEDGE	62
1.1.12. 802.11be MIMO SU MODE IN UNII-8 BAND – BANDEDGE	65
1.1.13. 802.11be MIMO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE	68
1.1.14. 802.11a MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS	71
1.1.15. 802.11be MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS	74
1.2. TRANSMITTER OUTSIDE 6.115 - 7.125 GHz, 1- 18GHz (VLP)	86
1.2.1. 802.11be SISO/MIMO MODE IN UNII-5 BAND – LOW BANDEDGE	86
1.2.2. 802.11a SISO MODE IN UNII-8 BAND – BANDEDGE	86
1.2.3. 802.11be SISO SU MODE IN UNII-8 BAND – BANDEDGE	89
1.2.4. 802.11be SISO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE	92
1.2.5. 802.11a MIMO MODE IN UNII-8 BAND – BANDEDGE	95
1.2.6. 802.11be MIMO SU MODE IN UNII-8 BAND – BANDEDGE	98
1.2.7. 802.11be MIMO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE	101
1.2.8. 802.11a MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS	104
1.2.9. 802.11be MIMO MODE – SPURIOUS EMISSIONS	107
1.3. WORST CASE BELOW 1 GHz	119
1.4. WORST CASE 18-26 GHz	121
1.5. WORST CASE 26-40 GHz	123
2. AC POWER LINE CONDUCTED EMISSIONS	125
2.1. EUT WITH AC ADAPTER	126
2.2. EUT WITH LAPTOP	128
3. SETUP PHOTOS	130

1. RADIATED TEST RESULTS

LIMITS

FCC §15.35(b)
 FCC §15.205 Restricted bands
 §15.209 and FCC §15.407(b)(6) -Un-Restricted bands

RSS-GEN 8.1
 RSS-GEN 8.9 Un-Restricted bands
 RSS-GEN 8.10 Restricted bands
 RSS 248 Issue 3 section 4.6.2a

Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27dBm/MHz rms and -7dBm/MHz Peak.

General field strength limits at frequencies above 30 MHz;

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.

For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

The spectrum from 30 MHz to 1GHz and 18GHz to 40 GHz is investigated with the transmitter set to transmit at the channel with highest output power as worst-case scenario. 1GHz to 18GHz was set to the lowest, middle, and highest channels in the 6 GHz bands.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

KDB 414788 Open Field Site (OFS) and Chamber Correlation Justification

OFS and chamber correlation testing had been performed and chamber measured test result is the worst-case test result.

Note: The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table), using the free space impedance of 377 Ohms. For example, the measurement at frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y - 51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

RESULTS

The plots in these sections are for reference of settings only, for different bandwidth and different antenna.

1.1. TRANSMITTER OUTSIDE 5.925 - 7.125 GHz, 1- 18GHz (Dual Client)

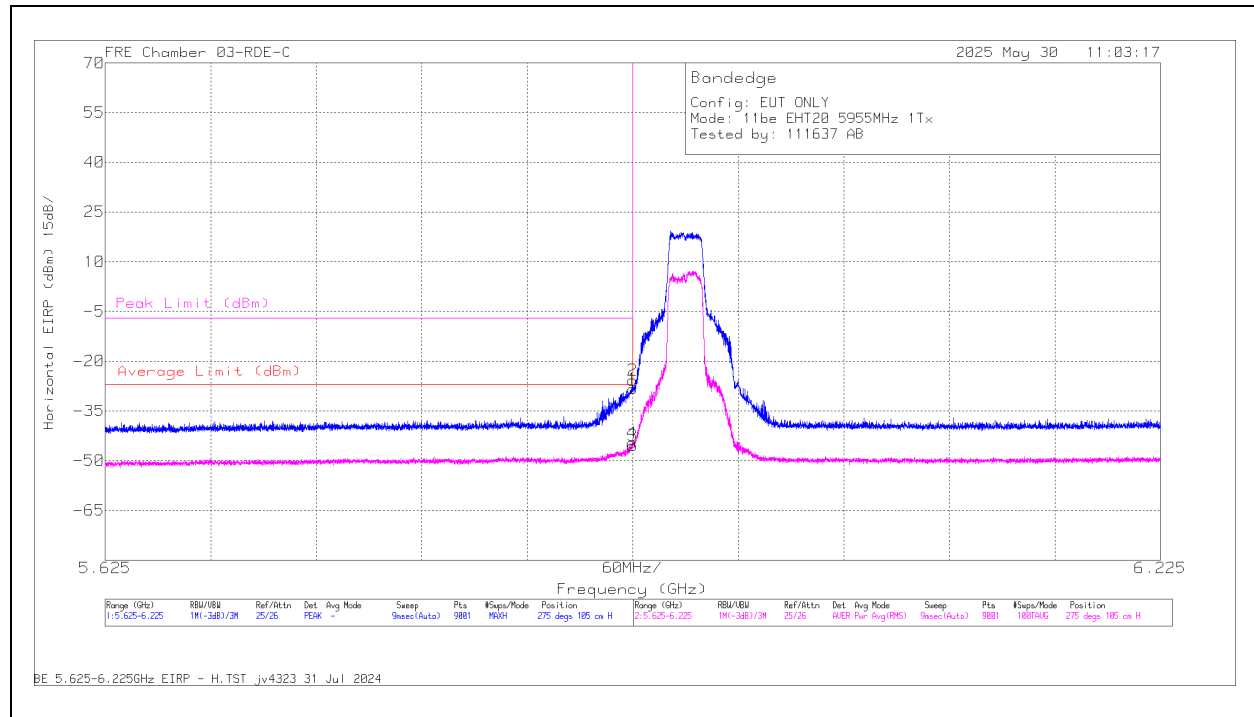
1.1.1. 802.11be SISO SU MODE IN UNII-5 BAND – BANDEDGE

UNII-5 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	5955	6	5.924468	-56.02	RMS	35.2	11.8	0	-36.1	-45.12	-27	-18.12	-	-	275	105	H
			5.924802	-36.58	Pk	35.2	11.8	0	-36.1	-25.68	-	-	-7	-18.68	275	105	H
			5.925	-39.19	Pk	35.2	11.8	0	-36.1	-28.29	-	-	-7	-21.29	275	105	H
			5.925	-56.75	RMS	35.2	11.8	0	-36.1	-45.85	-27	-18.85	-	-	275	105	H
			5.915335	-48.65	Pk	35.2	11.8	0	-36.07	-37.72	-	-	-7	-30.72	283	107	V
			5.922801	-60.48	RMS	35.2	11.8	0	-36.1	-49.58	-27	-22.58	-	-	283	107	V
		5	5.925	-49.48	Pk	35.2	11.8	0	-36.1	-38.58	-	-	-7	-31.58	283	107	V
			5.925	-61.24	RMS	35.2	11.8	0	-36.1	-50.34	-27	-23.34	-	-	283	107	V
			5.924335	-42.07	Pk	35.2	11.8	0	-36.1	-31.17	-	-	-7	-24.17	143	225	H
			5.924402	-58.54	RMS	35.2	11.8	0	-36.1	-47.64	-27	-20.64	-	-	143	225	H
			5.925	-43.57	Pk	35.2	11.8	0	-36.1	-32.67	-	-	-7	-25.67	143	225	H
			5.925	-59.42	RMS	35.2	11.8	0	-36.1	-48.52	-27	-21.52	-	-	143	225	H
			5.923601	-44.99	Pk	35.2	11.8	0	-36.1	-34.09	-	-	-7	-27.09	161	263	V
			5.924668	-60.41	RMS	35.2	11.8	0	-36.1	-49.51	-27	-22.51	-	-	161	263	V
			5.925	-46.59	Pk	35.2	11.8	0	-36.1	-35.69	-	-	-7	-28.69	161	263	V
			5.925	-60.15	RMS	35.2	11.8	0	-36.1	-49.25	-27	-22.25	-	-	161	263	V
EHT40 (SU Mode)	5965	6	5.920401	-44.13	RMS	35.1	11.8	0	-38.34	-35.57	-27	-8.57	-	-	277	141	H
			5.924602	-23.99	Pk	35.1	11.8	0	-38.34	-15.43	-	-	-7	-8.43	277	141	H
			5.925	-26.47	Pk	35.1	11.8	0	-38.3	-17.87	-	-	-7	-10.87	277	141	H
			5.925	-47.59	RMS	35.1	11.8	0	-38.3	-38.99	-27	-11.99	-	-	277	141	H
			5.904601	-59.26	RMS	35.1	11.8	0	-38.4	-50.76	-27	-23.76	-	-	282	103	V
			5.924602	-38.43	Pk	35.1	11.8	0	-38.34	-29.87	-	-	-7	-22.87	282	103	V
		5	5.925	-41.83	Pk	35.1	11.8	0	-38.3	-33.23	-	-	-7	-26.23	282	103	V
			5.925	-60.72	RMS	35.1	11.8	0	-38.3	-52.12	-27	-25.12	-	-	282	103	V
			5.922601	-50.43	RMS	35.1	11.8	0	-38.4	-41.93	-27	-14.93	-	-	235	204	H
			5.924935	-29.24	Pk	35.1	11.8	0	-38.31	-20.65	-	-	-7	-13.65	235	204	H
			5.925	-28.86	Pk	35.1	11.8	0	-38.3	-20.26	-	-	-7	-13.26	235	204	H
			5.925	-51.22	RMS	35.1	11.8	0	-38.3	-42.62	-27	-15.62	-	-	235	204	H
			5.923268	-50.71	RMS	35.1	11.8	0	-38.4	-42.21	-27	-15.21	-	-	263	241	V
			5.924802	-31.36	Pk	35.1	11.8	0	-38.32	-22.78	-	-	-7	-15.78	263	241	V
			5.925	-31.1	Pk	35.1	11.8	0	-38.3	-22.5	-	-	-7	-15.5	263	241	V
			5.925	-52.28	RMS	35.1	11.8	0	-38.3	-43.68	-27	-16.68	-	-	263	241	V
EHT80 (SU Mode)	5985	6	5.922201	-45.04	RMS	35.1	11.8	0	-38.4	-36.54	-27	-9.54	-	-	12	130	H
			5.924935	-25.94	Pk	35.1	11.8	0	-38.31	-17.35	-	-	-7	-10.35	12	130	H
			5.925	-28.08	Pk	35.1	11.8	0	-38.3	-19.48	-	-	-7	-12.48	12	130	H
			5.925	-45.34	RMS	35.1	11.8	0	-38.3	-36.74	-27	-9.74	-	-	12	130	H
			5.914201	-41.11	Pk	35.1	11.8	0	-38.4	-32.61	-	-	-7	-25.61	302	102	V
			5.920868	-56.48	RMS	35.1	11.8	0	-38.39	-47.97	-27	-20.97	-	-	302	102	V
		5	5.925	-42.89	Pk	35.1	11.8	0	-38.3	-34.29	-	-	-7	-27.29	302	102	V
			5.925	-58.41	RMS	35.1	11.8	0	-38.3	-49.81	-27	-22.81	-	-	302	102	V
			5.918868	-71.21	RMS	35.1	11.8	0	-16.4	-40.71	-27	-13.71	-	-	211	229	H
			5.920335	-53.49	Pk	35.1	11.8	0	-16.4	-22.99	-	-	-7	-15.99	211	229	H
			5.925	-55.8	Pk	35.2	11.8	0	-16.5	-25.3	-	-	-7	-18.3	211	229	H
			5.925	-72.09	RMS	35.2	11.8	0	-16.5	-41.59	-27	-14.59	-	-	211	229	H
			5.919001	-72.63	RMS	35.1	11.8	0	-16.4	-42.13	-27	-15.13	-	-	214	233	V
			5.920801	-56.16	Pk	35.1	11.8	0	-16.5	-25.76	-	-	-7	-18.76	214	233	V
			5.925	-57.69	Pk	35.2	11.8	0	-16.5	-27.19	-	-	-7	-20.19	214	233	V
			5.925	-73.42	RMS	35.2	11.8	0	-16.5	-42.92	-27	-15.92	-	-	214	233	V
EHT160 (SU Mode)	6025	6	5.893535	-39.63	Pk	35	11.8	0	-26.3	-19.13	-	-	-7	-12.13	232	130	H
			5.898935	-54.9	RMS	35	11.8	0.14	-26.2	-34.16	-27	-7.16	-	-	232	130	H
			5.925	-45.42	Pk	35.1	11.8	0	-26.2	-24.72	-	-	-7	-17.72	232	130	H
			5.925	-63.13	RMS	35.1	11.8	0.14	-26.2	-42.29	-27	-15.29	-	-	232	130	H
			5.893601	-57.27	Pk	35	11.8	0	-26.3	-36.77	-	-	-7	-29.77	80	280	V
			5.899535	-72.49	RMS	35	11.8	0.14	-26.2	-51.75	-27	-24.75	-	-	80	280	V
		5	5.925	-62.08	Pk	35.1	11.8	0	-26.2	-41.38	-	-	-7	-34.38	80	280	V
			5.925	-74.03	RMS	35.1	11.8	0.14	-26.2	-53.19	-27	-26.19	-	-	80	280	V
			5.897401	-49.57	Pk	35	11.8	0	-26.2	-28.97	-	-	-7	-21.97	296	135	H
			5.900868	-65.04	RMS	35	11.8	0.14	-26.2	-44.3	-27	-17.3	-	-	296	135	H
			5.925	-54.89	Pk	35.1	11.8	0	-26.2	-34.19	-	-	-7	-27.19	296	135	H
			5.925	-71.16	RMS	35.1	11.8	0.14	-26.2	-50.32	-27	-23.32	-	-	296	135	H
			5.899201	-50.23	Pk	35	11.8	0	-26.2	-29.63	-	-	-7	-22.63	276	192	V
			5.901268	-66.72	RMS	35	11.8	0.14	-26.2	-45.98	-27	-18.98	-	-	276	192	V
			5.925	-56	Pk	35.1	11.8	0	-26.2	-35.3	-	-	-7	-28.3	276	192	V
			5.925	-72.72	RMS	35.1	11.8	0.14	-26.2	-51.88	-27	-24.88	-	-	276	192	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

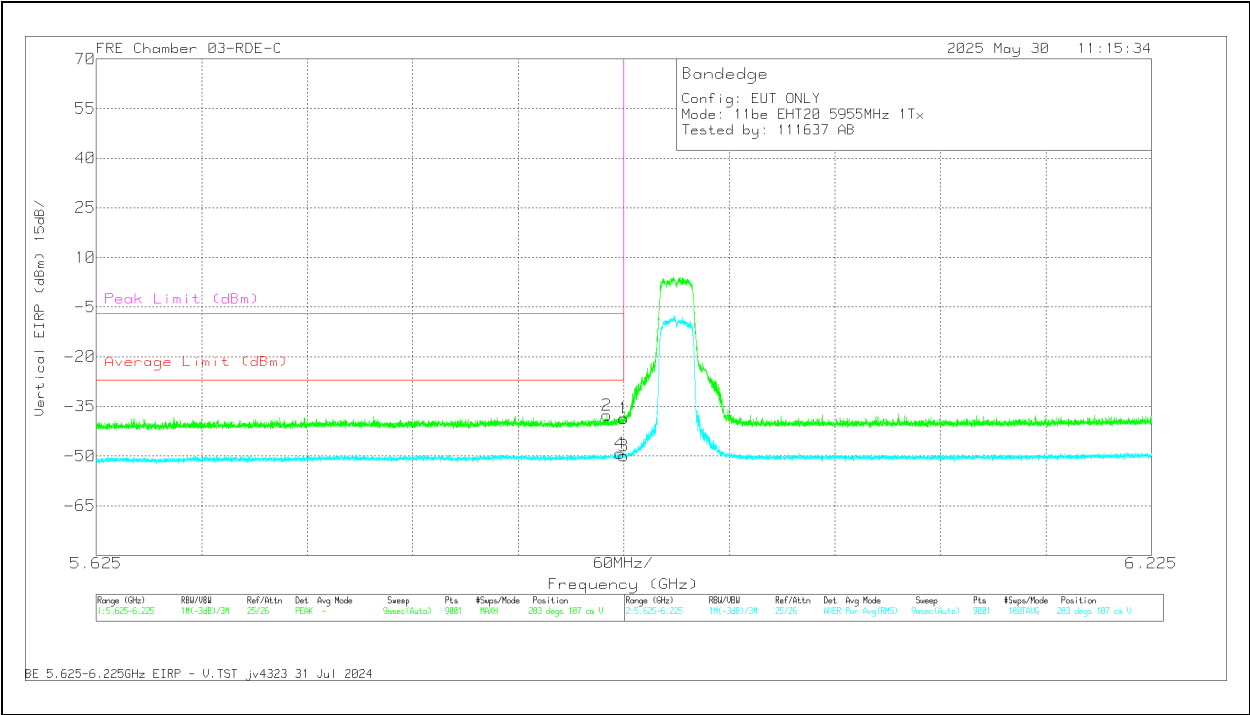
RMS - RMS detection

**1TX Antenna 6 MODE: SU
BANDEDGE (LOW CHANNEL / 5955MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.924468	-56.02	RMS	35.2	11.8	0	-36.1	-45.12	-27	-18.12	-	-	275	105	H
2	5.924802	-36.58	Pk	35.2	11.8	0	-36.1	-25.68	-	-	-7	-18.68	275	105	H
1	5.925	-39.19	Pk	35.2	11.8	0	-36.1	-28.29	-	-	-7	-21.29	275	105	H
3	5.925	-56.75	RMS	35.2	11.8	0	-36.1	-45.85	-27	-18.85	-	-	275	105	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT



Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dBm)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.915335	-48.65	Pk	35.2	11.8	0	-36.07	-37.72	-	-	-7	-30.72	283	107	V
4	5.922801	-60.48	RMS	35.2	11.8	0	-36.1	-49.58	-27	-22.58	-	-	283	107	V
1	5.925	-49.48	Pk	35.2	11.8	0	-36.1	-38.58	-	-	-7	-31.58	283	107	V
3	5.925	-61.24	RMS	35.2	11.8	0	-36.1	-50.34	-27	-23.34	-	-	283	107	V

Pk - Peak detector
RMS - RMS detection

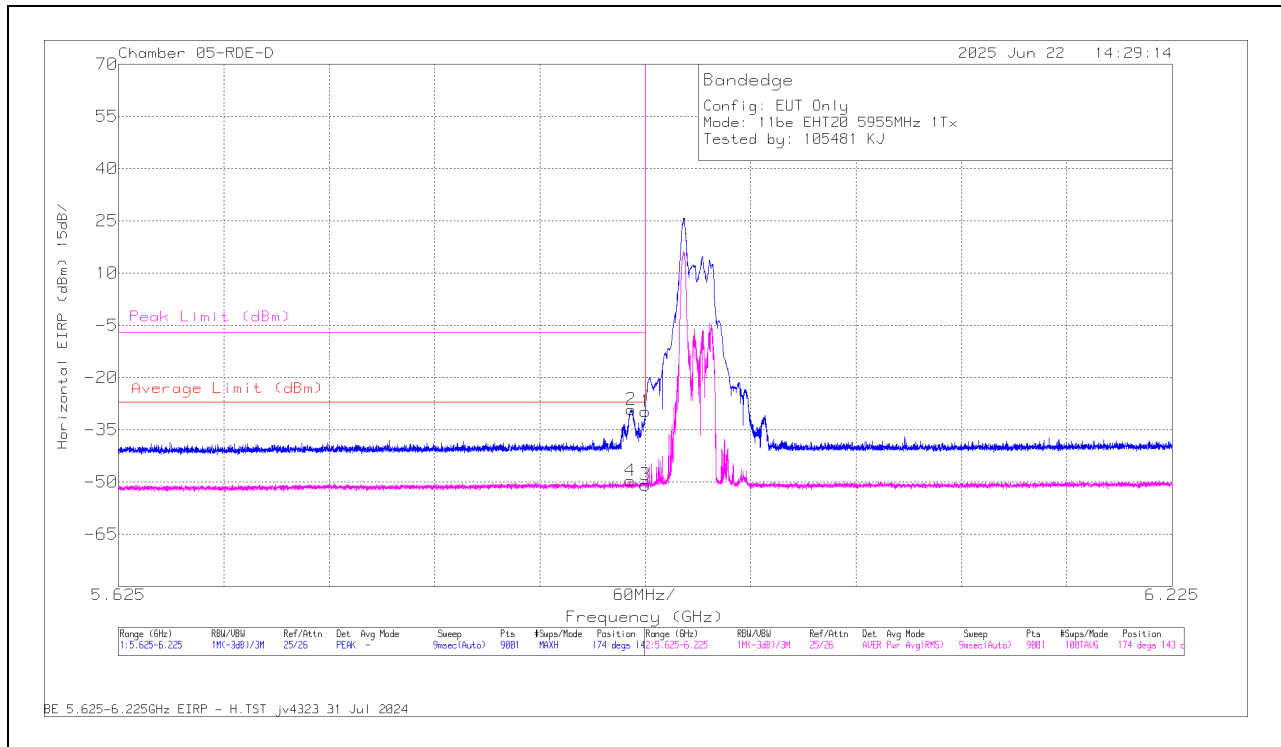
1.1.2. 802.11be SISO PARTIAL RU MODE IN UNII-5 BAND - BANDEDGE

UNII-5 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 26 / Index 0)	5955	6	5.916401	-58.7	RMS	35.2	11.8	0	-37.93	-49.63	-27	-22.63	-	-	174	143	H
			5.916935	-38.38	Pk	35.2	11.8	0	-37.89	-29.27	-	-	-7	-22.27	174	143	H
			5.925	-39.01	Pk	35.3	11.8	0	-37.84	-29.75	-	-	-7	-22.75	174	143	H
			5.925	-60.05	RMS	35.3	11.8	0	-37.84	-50.79	-27	-23.79	-	-	174	143	H
			5.844934	-59.34	RMS	35.1	11.8	0	-38.06	-50.5	-27	-23.5	-	-	189	246	V
			5.924735	-39.59	Pk	35.3	11.8	0	-37.86	-30.35	-	-	-7	-23.35	189	246	V
		5	5.925	-40.41	Pk	35.3	11.8	0	-37.84	-31.15	-	-	-7	-24.15	189	246	V
			5.925	-60.45	RMS	35.3	11.8	0	-37.84	-51.19	-27	-24.19	-	-	189	246	V
			5.884401	-61.64	RMS	35.2	11.8	0	-33.46	-48.1	-27	-21.1	-	-	100	218	H
			5.924268	-49.31	Pk	35.3	11.8	0	-33.72	-35.93	-	-	-7	-28.93	100	218	H
			5.925	-51.95	Pk	35.3	11.8	0	-33.72	-38.57	-	-	-7	-31.57	100	218	H
			5.925	-62.72	RMS	35.3	11.8	0	-33.72	-49.34	-27	-22.34	-	-	100	218	H
			5.916535	-48.88	Pk	35.2	11.8	0	-33.81	-35.69	-	-	-7	-28.69	99	193	V
			5.924335	-61.33	RMS	35.3	11.8	0	-33.72	-47.95	-27	-20.95	-	-	99	193	V
			5.925	-50.85	Pk	35.3	11.8	0	-33.72	-37.47	-	-	-7	-30.47	99	193	V
			5.925	-62.6	RMS	35.3	11.8	0	-33.72	-49.22	-27	-22.22	-	-	99	193	V
EHT40 (RU 26 / Index 0)	5965	6	5.924135	-59.7	RMS	35.2	11.8	0.09	-36.55	-49.16	-27	-22.16	-	-	161	107	H
			5.924935	-43.02	Pk	35.2	11.8	0	-36.51	-32.53	-	-	-7	-25.53	161	107	H
			5.925	-43.5	Pk	35.2	11.8	0	-36.51	-33.01	-	-	-7	-26.01	161	107	H
			5.925	-60.74	RMS	35.2	11.8	0.09	-36.51	-50.16	-27	-23.16	-	-	161	107	H
			5.892735	-48.34	Pk	35.2	11.8	0	-36.65	-37.99	-	-	-7	-30.99	300	254	V
			5.922868	-60.56	RMS	35.2	11.8	0.09	-36.54	-50.01	-27	-23.01	-	-	300	254	V
		5	5.925	-50.56	Pk	35.2	11.8	0	-36.51	-40.07	-	-	-7	-33.07	300	254	V
			5.925	-61.19	RMS	35.2	11.8	0.09	-36.51	-50.61	-27	-23.61	-	-	300	254	V
			5.905868	-60.3	RMS	35.2	11.8	0.09	-36.63	-49.84	-27	-22.84	-	-	195	243	H
			5.922735	-46.6	Pk	35.2	11.8	0	-36.54	-36.14	-	-	-7	-29.14	195	243	H
			5.925	-48.66	Pk	35.2	11.8	0	-36.51	-38.17	-	-	-7	-31.17	195	243	H
			5.925	-61.78	RMS	35.2	11.8	0.09	-36.51	-51.2	-27	-24.2	-	-	195	243	H
			5.800734	-47.56	Pk	35.1	11.8	0	-36.97	-37.63	-	-	-7	-30.63	217	201	V
			5.888601	-60.31	RMS	35.2	11.8	0.09	-36.62	-49.84	-27	-22.84	-	-	217	201	V
			5.925	-48.26	Pk	35.2	11.8	0	-36.51	-37.77	-	-	-7	-30.77	217	201	V
			5.925	-61.48	RMS	35.2	11.8	0.09	-36.51	-50.9	-27	-23.9	-	-	217	201	V
EHT80 (RU 26 / Index 0)	5985	6	5.909135	-59.89	RMS	35.2	11.8	0.09	-36.63	-49.43	-27	-22.43	-	-	161	256	H
			5.924668	-45.02	Pk	35.2	11.8	0	-36.53	-34.55	-	-	-7	-27.55	161	256	H
			5.925	-45.27	Pk	35.2	11.8	0	-36.51	-34.78	-	-	-7	-27.78	161	256	H
			5.925	-60.93	RMS	35.2	11.8	0.09	-36.51	-50.35	-27	-23.35	-	-	161	256	H
			5.849134	-60.17	RMS	35.1	11.8	0.09	-36.8	-49.98	-27	-22.98	-	-	93	211	V
			5.855068	-48.39	Pk	35.1	11.8	0	-36.73	-38.22	-	-	-7	-31.22	93	211	V
		5	5.925	-51.03	Pk	35.2	11.8	0	-36.51	-40.54	-	-	-7	-33.54	93	211	V
			5.925	-61.05	RMS	35.2	11.8	0.09	-36.51	-50.47	-27	-23.47	-	-	93	211	V
			5.919735	-60.21	RMS	35.2	11.8	0.09	-36.53	-49.65	-27	-22.65	-	-	198	246	H
			5.921535	-47.36	Pk	35.2	11.8	0	-36.53	-36.89	-	-	-7	-29.89	198	246	H
			5.925	-47.74	Pk	35.2	11.8	0	-36.51	-37.25	-	-	-7	-30.25	198	246	H
			5.925	-61.01	RMS	35.2	11.8	0.09	-36.51	-50.43	-27	-23.43	-	-	198	246	H
			5.851401	-59.98	RMS	35.1	11.8	0.09	-36.77	-49.76	-27	-22.76	-	-	226	191	V
			5.924735	-47.7	Pk	35.2	11.8	0	-36.52	-37.22	-	-	-7	-30.22	226	191	V
			5.925	-48.83	Pk	35.2	11.8	0	-36.51	-38.34	-	-	-7	-31.34	226	191	V
			5.925	-61.41	RMS	35.2	11.8	0.09	-36.51	-50.83	-27	-23.83	-	-	226	191	V
EHT160 (RU 26 / Index 0)	6025	6	5.868868	-58.93	RMS	35.1	11.8	0.1	-36.69	-48.62	-27	-21.62	-	-	152	205	H
			5.924668	-41.81	Pk	35.2	11.8	0	-36.53	-31.34	-	-	-7	-24.34	152	205	H
			5.925	-43.38	Pk	35.2	11.8	0	-36.51	-32.89	-	-	-7	-25.89	152	205	H
			5.925	-60.71	RMS	35.2	11.8	0.1	-36.51	-50.12	-27	-23.12	-	-	152	205	H
			5.871135	-48.2	Pk	35.2	11.8	0	-36.68	-37.88	-	-	-7	-30.88	119	231	V
			5.873468	-60.37	RMS	35.2	11.8	0.1	-36.67	-49.94	-27	-22.94	-	-	119	231	V
		5	5.925	-51.21	Pk	35.2	11.8	0	-36.51	-40.72	-	-	-7	-33.72	119	231	V
			5.925	-61.75	RMS	35.2	11.8	0.1	-36.51	-51.16	-27	-24.16	-	-	119	231	V
			5.917735	-60.14	RMS	35.2	11.8	0.1	-36.55	-49.59	-27	-22.59	-	-	206	296	H
			5.924468	-46.02	Pk	35.2	11.8	0	-36.54	-35.56	-	-	-7	-28.56	206	296	H
			5.925	-47.15	Pk	35.2	11.8	0	-36.51	-36.66	-	-	-7	-29.66	206	296	H
			5.925	-61.06	RMS	35.2	11.8	0.1	-36.51	-50.47	-27	-23.47	-	-	206	296	H
			5.869735	-60.3	RMS	35.2	11.8	0.1	-36.68	-49.88	-27	-22.88	-	-	222	200	V
			5.923801	-46.35	Pk	35.2	11.8	0	-36.56	-35.91	-	-	-7	-28.91	222	200	V
			5.925	-47.69	Pk	35.2	11.8	0	-36.51	-37.2	-	-	-7	-30.2	222	200	V
			5.925	-60.96	RMS	35.2	11.8	0.1	-36.51	-50.37	-27	-23.37	-	-	222	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

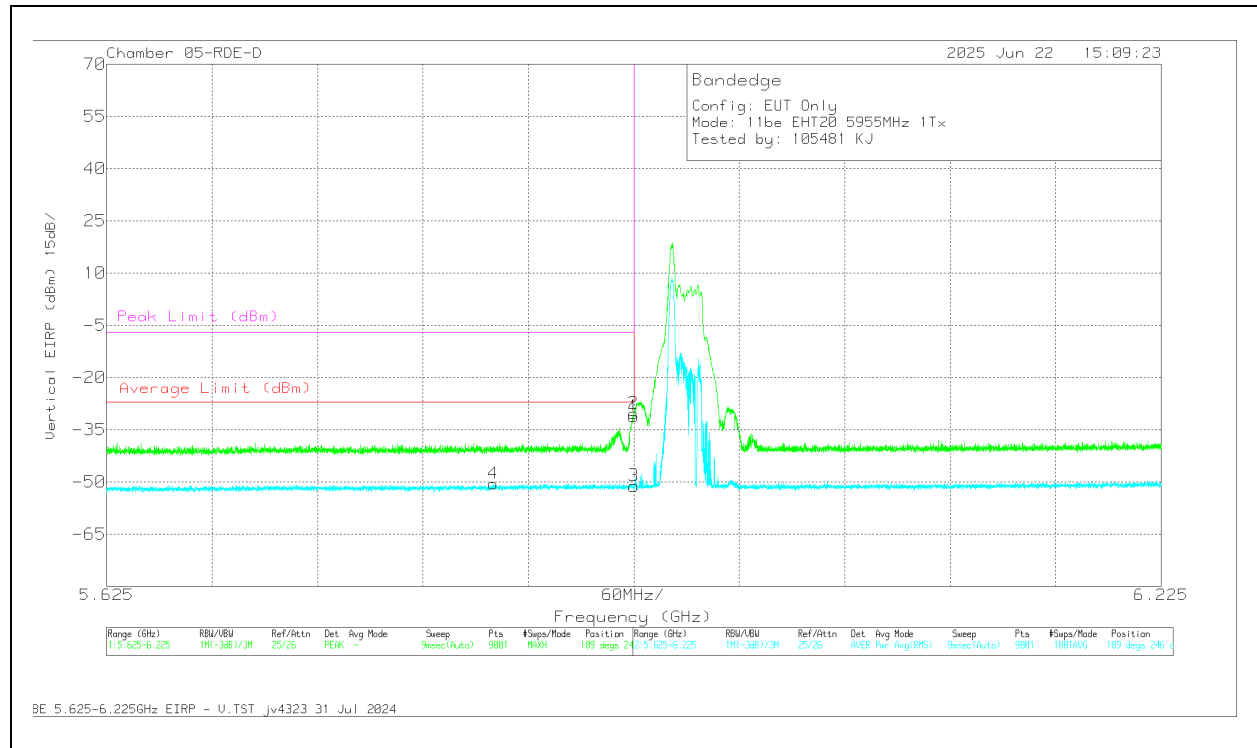
Pk - Peak detector

RMS - RMS detection

1TX Antenna 6 MODE: 26-Tones, RU Index 0**BANDEDGE (LOW CHANNEL / 5955MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.916401	-58.7	RMS	35.2	11.8	0	-37.93	-49.63	-27	-22.63	-	-	174	143	H
2	5.916935	-38.38	Pk	35.2	11.8	0	-37.89	-29.27	-	-	-7	-22.27	174	143	H
1	5.925	-39.01	Pk	35.3	11.8	0	-37.84	-29.75	-	-	-7	-22.75	174	143	H
3	5.925	-60.05	RMS	35.3	11.8	0	-37.84	-50.79	-27	-23.79	-	-	174	143	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dBm)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.844934	-59.34	RMS	35.1	11.8	0	-38.06	-50.5	-27	-23.5	-	-	189	246	V
2	5.924735	-39.59	Pk	35.3	11.8	0	-37.86	-30.35	-	-	-7	-23.35	189	246	V
1	5.925	-40.41	Pk	35.3	11.8	0	-37.84	-31.15	-	-	-7	-24.15	189	246	V
3	5.925	-60.45	RMS	35.3	11.8	0	-37.84	-51.19	-27	-24.19	-	-	189	246	V

Pk - Peak detector
RMS - RMS detection

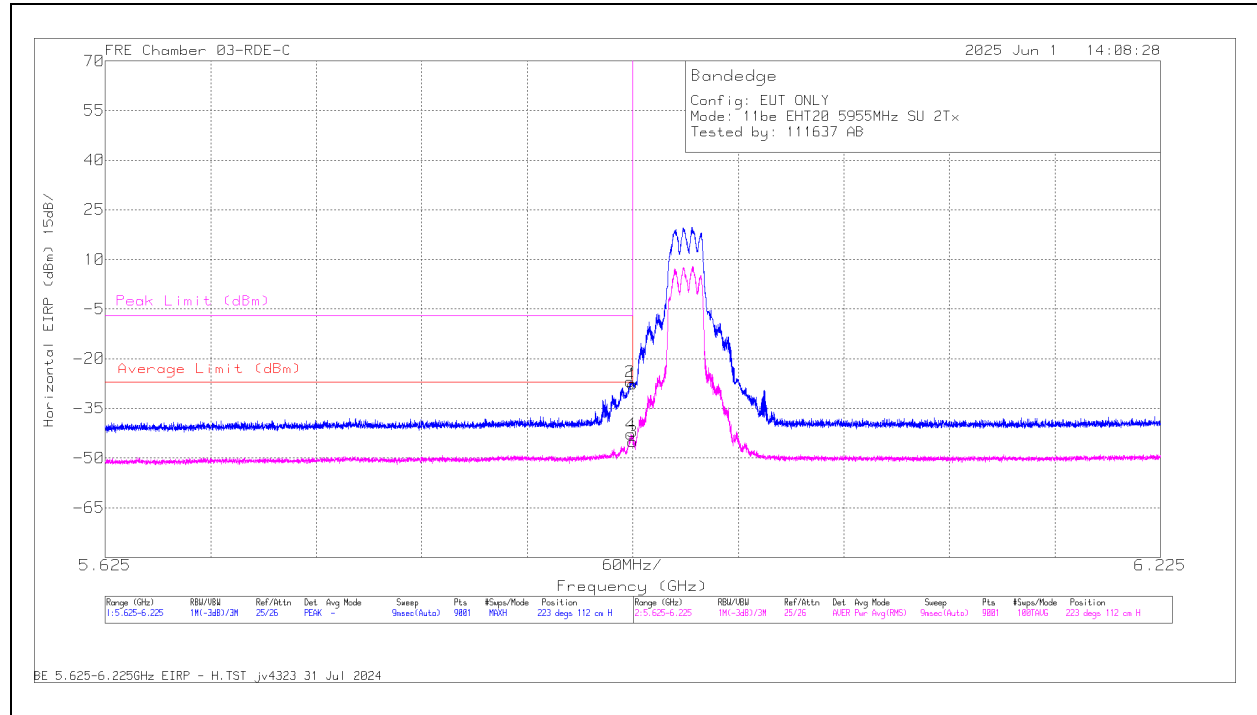
1.1.3. 802.11be MIMO SU MODE IN UNII-5 BAND - BANDEDGE

x	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	5955	6 + 5	5.923668	-37.85	Pk	35.2	11.8	0	-36.1	-26.95	-	-	-7	-19.95	223	112	H
			5.923868	-54.15	RMS	35.2	11.8	0	-36.1	-43.25	-27	-16.25	-	-	223	112	H
			5.925	-38.53	Pk	35.2	11.8	0	-36.1	-27.63	-	-	-7	-20.63	223	112	H
			5.925	-56.33	RMS	35.2	11.8	0	-36.1	-45.43	-27	-18.43	-	-	223	112	H
			5.922868	-43.85	Pk	35.2	11.8	0	-36.1	-32.95	-	-	-7	-25.95	264	197	V
			5.924868	-59.7	RMS	35.2	11.8	0	-36.1	-48.8	-27	-21.8	-	-	264	197	V
			5.925	-46.53	Pk	35.2	11.8	0	-36.1	-35.63	-	-	-7	-28.63	264	197	V
			5.925	-60.03	RMS	35.2	11.8	0	-36.1	-49.13	-27	-22.13	-	-	264	197	V
EHT40 (SU Mode)	5965	6 + 5	5.924268	-23.37	Pk	35.1	11.8	0	-38.37	-14.84	-	-	-7	-7.84	7	107	H
			5.924935	-41.96	RMS	35.1	11.8	0	-38.31	-33.37	-27	-6.37	-	-	7	107	H
			5.925	-27.7	Pk	35.1	11.8	0	-38.3	-19.1	-	-	-7	-12.1	7	107	H
			5.925	-44.44	RMS	35.1	11.8	0	-38.3	-35.84	-27	-8.84	-	-	7	107	H
			5.922735	-51.02	RMS	35.1	11.8	0	-38.4	-42.52	-27	-15.52	-	-	58	184	V
			5.924668	-31.38	Pk	35.1	11.8	0	-38.33	-22.81	-	-	-7	-15.81	58	184	V
			5.925	-35.59	Pk	35.1	11.8	0	-38.3	-26.99	-	-	-7	-19.99	58	184	V
			5.925	-52.35	RMS	35.1	11.8	0	-38.3	-43.75	-27	-16.75	-	-	58	184	V
EHT80 (SU Mode)	5985	6 + 5	5.919335	-45.62	RMS	35.2	11.8	0	-36.8	-35.42	-27	-8.42	-	-	42	174	H
			5.919935	-27.71	Pk	35.2	11.8	0	-36.62	-17.33	-	-	-7	-10.33	42	174	H
			5.925	-30.87	Pk	35.2	11.8	0	-36.8	-20.67	-	-	-7	-13.67	42	174	H
			5.925	-49.5	RMS	35.2	11.8	0	-36.8	-39.3	-27	-12.3	-	-	42	174	H
			5.915668	-56.08	RMS	35.2	11.8	0	-36.8	-45.88	-27	-18.88	-	-	115	123	V
			5.920068	-38.03	Pk	35.2	11.8	0	-36.63	-27.66	-	-	-7	-20.66	115	123	V
			5.925	-40.7	Pk	35.2	11.8	0	-36.8	-30.5	-	-	-7	-23.5	115	123	V
			5.925	-56.89	RMS	35.2	11.8	0	-36.8	-46.69	-27	-19.69	-	-	115	123	V
EHT160 (SU Mode)	6025	6 + 5	5.896068	-49.48	RMS	35.2	11.8	0.14	-37.97	-40.31	-27	-13.31	-	-	154	101	H
			5.901601	-32.48	Pk	35.2	11.8	0	-37.94	-23.42	-	-	-7	-16.42	154	101	H
			5.925	-39.09	Pk	35.3	11.8	0	-37.84	-29.83	-	-	-7	-22.83	154	101	H
			5.925	-50.83	RMS	35.3	11.8	0.14	-37.84	-41.43	-27	-14.43	-	-	154	101	H
			5.901468	-25.8	Pk	35.2	11.8	0	-37.93	-16.73	-	-	-7	-9.73	190	231	V
			5.902735	-44.01	RMS	35.2	11.8	0.14	-37.93	-34.8	-27	-7.8	-	-	190	231	V
			5.925	-31.28	Pk	35.3	11.8	0	-37.84	-22.02	-	-	-7	-15.02	190	231	V
			5.925	-45.5	RMS	35.3	11.8	0.14	-37.84	-36.1	-27	-9.1	-	-	190	231	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

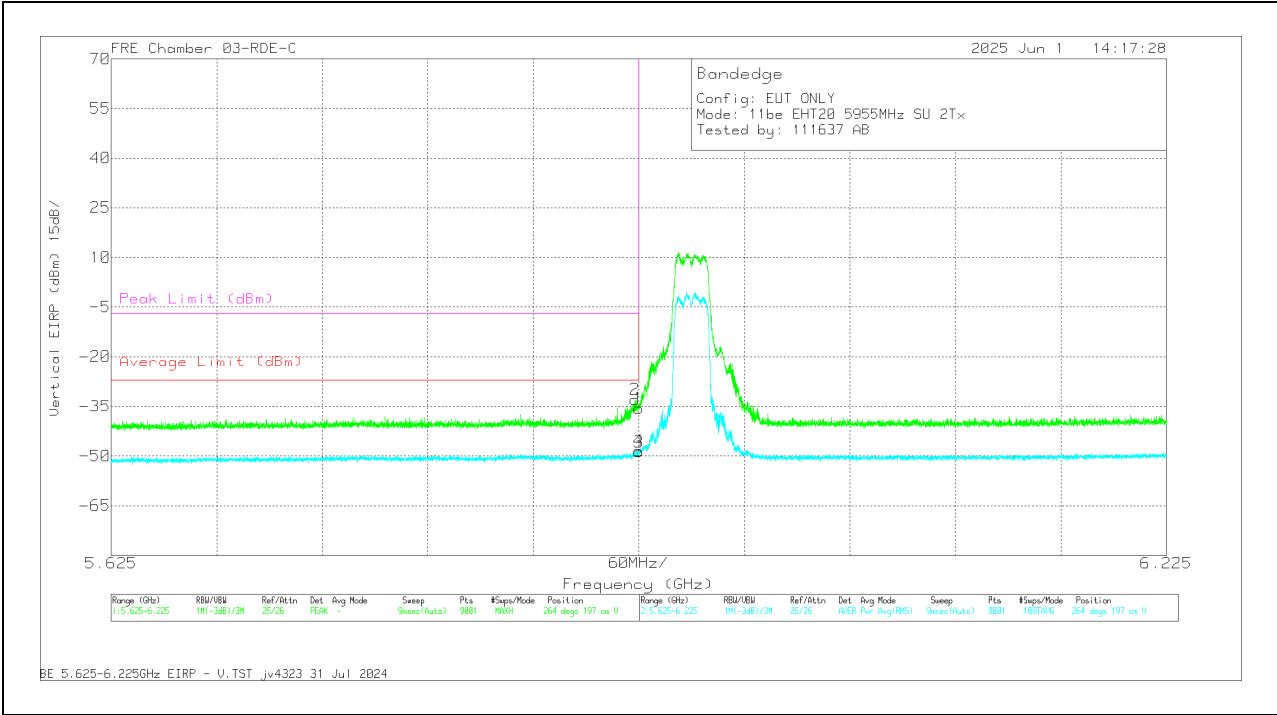
RMS - RMS detection

2TX Antenna 6 + Antenna 5 OFDMA MODE: SU Mode**BANDEDGE (LOW CHANNEL / 5955MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.923668	-37.85	Pk	35.2	11.8	0	-36.1	-26.95	-	-	-7	-19.95	223	112	H
4	5.923868	-54.15	RMS	35.2	11.8	0	-36.1	-43.25	-27	-16.25	-	-	223	112	H
1	5.925	-38.53	PK	35.2	11.8	0	-36.1	-27.63	-	-	-7	-20.63	223	112	H
3	5.925	-56.33	RMS	35.2	11.8	0	-36.1	-45.43	-27	-18.43	-	-	223	112	H

PK- Peak detector
RMS - RMS detection

VERTICAL RESULT



Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.922868	-43.85	Pk	35.2	11.8	0	-36.1	-32.95	-	-	-7	-25.95	264	197	V
4	5.924868	-59.7	RMS	35.2	11.8	0	-36.1	-48.8	-27	-21.8	-	-	264	197	V
1	5.925	-46.53	Pk	35.2	11.8	0	-36.1	-35.63	-	-	-7	-28.63	264	197	V
3	5.925	-60.03	RMS	35.2	11.8	0	-36.1	-49.13	-27	-22.13	-	-	264	197	V

Pk - Peak detector
 RMS - RMS detection

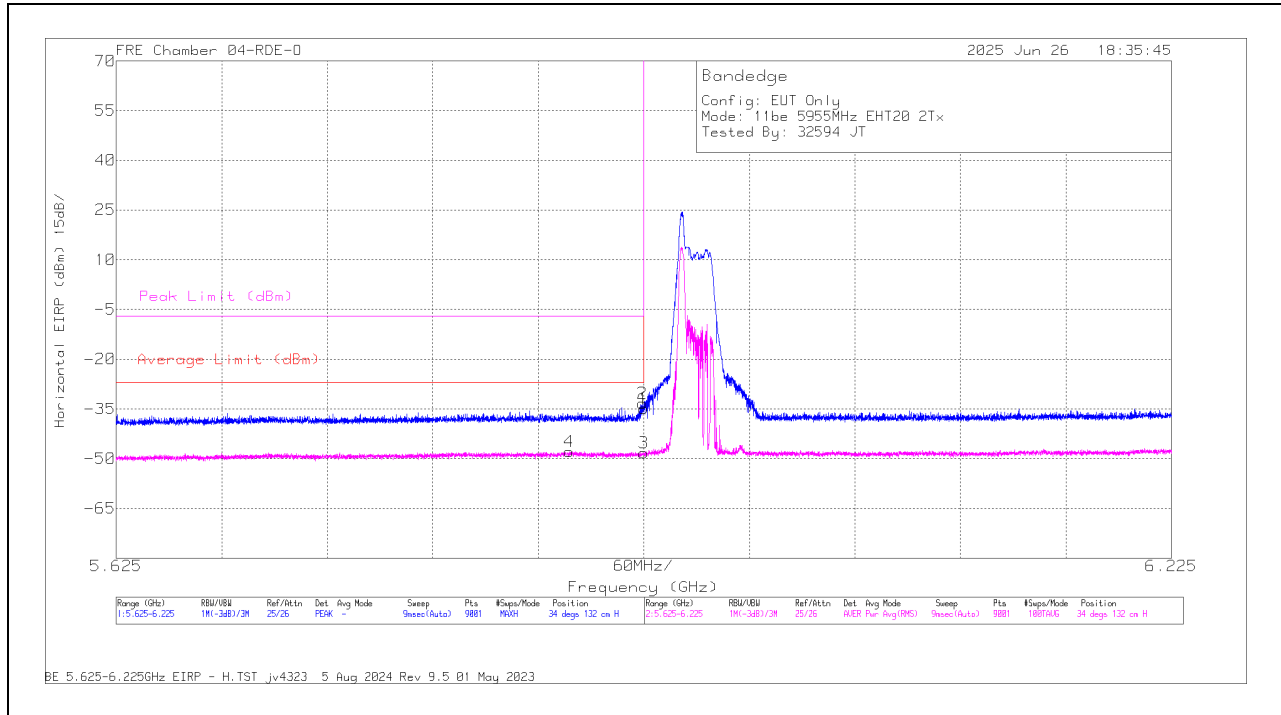
1.1.4. 802.11be MIMO PARTIAL RU MODE IN UNII-5 BAND - BANDEDGE

UNII-5 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 26 / Index 0)	5955	6+5	5.882668	-61.34	RMS	35.2	11.8	0	-33.46	-47.8	-27	-20.8	-	-	34	132	H
			5.924268	-46.62	Pk	35.3	11.8	0	-33.72	-33.24	-	-	-7	-26.24	34	132	H
			5.925	-48.29	Pk	35.3	11.8	0	-33.72	-34.91	-	-	-7	-27.91	34	132	H
			5.925	-61.7	RMS	35.3	11.8	0	-33.72	-48.32	-27	-21.32	-	-	34	132	H
			5.878668	-49.28	Pk	35.2	11.8	0	-33.61	-35.89	-	-	-7	-28.89	90	243	V
			5.884401	-61.45	RMS	35.2	11.8	0	-33.46	-47.91	-27	-20.91	-	-	90	243	V
			5.925	-51.79	Pk	35.3	11.8	0	-33.72	-38.41	-	-	-7	-31.41	90	243	V
			5.925	-62.45	RMS	35.3	11.8	0	-33.72	-49.07	-27	-22.07	-	-	90	243	V
EHT40 (RU 26 / Index 0)	5965	6+5	5.902401	-59.84	RMS	35.2	11.8	0.09	-36.63	-49.38	-27	-22.38	-	-	178	209	H
			5.924468	-46.66	Pk	35.2	11.8	0	-36.54	-36.2	-	-	-7	-29.2	178	209	H
			5.925	-49.4	Pk	35.2	11.8	0	-36.51	-38.91	-	-	-7	-31.91	178	209	H
			5.925	-61.17	RMS	35.2	11.8	0.09	-36.51	-50.59	-27	-23.59	-	-	178	209	H
			5.833934	-48.16	Pk	35.1	11.8	0	-36.87	-38.13	-	-	-7	-31.13	231	243	V
			5.867801	-60.1	RMS	35.1	11.8	0.09	-36.71	-49.82	-27	-22.82	-	-	231	243	V
			5.925	-50.55	Pk	35.2	11.8	0	-36.51	-40.06	-	-	-7	-33.06	231	243	V
			5.925	-61.3	RMS	35.2	11.8	0.09	-36.51	-50.72	-27	-23.72	-	-	231	243	V
EHT80 (RU 26 / Index 0)	5985	6+5	5.905668	-59.71	RMS	35.2	11.8	0.09	-36.63	-49.25	-27	-22.25	-	-	169	146	H
			5.924602	-45.69	Pk	35.2	11.8	0	-36.53	-35.22	-	-	-7	-28.22	169	146	H
			5.925	-48.47	Pk	35.2	11.8	0	-36.51	-37.98	-	-	-7	-30.98	169	146	H
			5.925	-61.17	RMS	35.2	11.8	0.09	-36.51	-50.59	-27	-23.59	-	-	169	146	H
			5.844401	-47.98	Pk	35.1	11.8	0	-36.75	-37.83	-	-	-7	-30.83	199	213	V
			5.851134	-60.13	RMS	35.1	11.8	0.09	-36.78	-49.92	-27	-22.92	-	-	199	213	V
			5.925	-50.93	Pk	35.2	11.8	0	-36.51	-40.44	-	-	-7	-33.44	199	213	V
			5.925	-61.33	RMS	35.2	11.8	0.09	-36.51	-50.75	-27	-23.75	-	-	199	213	V
	6025	6+5	5.869401	-59.15	RMS	35.1	11.8	0.1	-36.68	-48.83	-27	-21.83	-	-	168	103	H
			5.924868	-43.67	Pk	35.2	11.8	0	-36.52	-33.19	-	-	-7	-26.19	168	103	H
			5.925	-43.61	Pk	35.2	11.8	0	-36.51	-33.12	-	-	-7	-26.12	168	103	H
			5.925	-60.94	RMS	35.2	11.8	0.1	-36.51	-50.35	-27	-23.35	-	-	168	103	H
			5.67	-47.67	Pk	35.1	11.8	0	-37.43	-38.2	-	-	-7	-31.2	238	102	V
			5.864268	-60.18	RMS	35.1	11.8	0.1	-36.7	-49.88	-27	-22.88	-	-	238	102	V
			5.925	-49.91	Pk	35.2	11.8	0	-36.51	-39.42	-	-	-7	-32.42	238	102	V
			5.925	-61.39	RMS	35.2	11.8	0.1	-36.51	-50.8	-27	-23.8	-	-	238	102	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

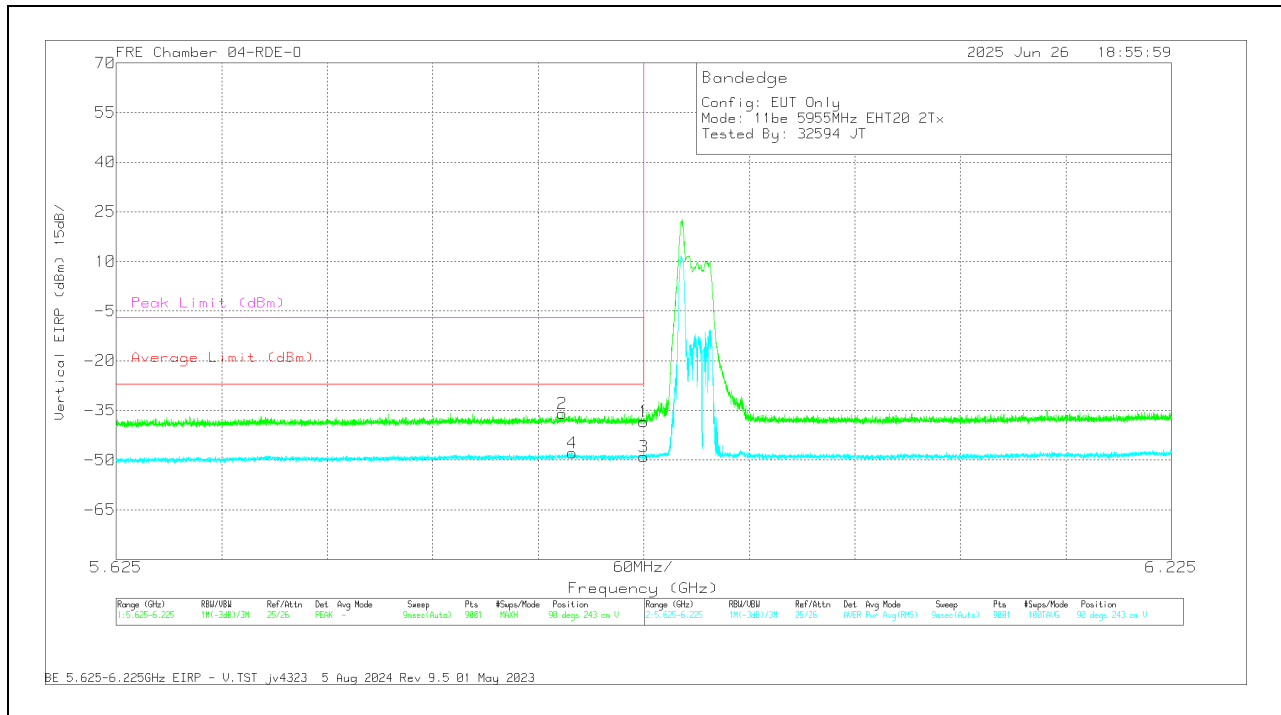
Pk - Peak detector

RMS - RMS detection

2TX Antenna 6 + Antenna 5 OFDMA MODE: 26-Tones, RU Index 0**BANDEDGE (LOW CHANNEL / 5955MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 80402 (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.882668	-61.34	RMS	35.2	11.8	0	-33.46	-47.8	-27	-20.8	-	-	34	132	H
2	5.924268	-46.62	Pk	35.3	11.8	0	-33.72	-33.24	-	-	-7	-26.24	34	132	H
1	5.925	-48.29	Pk	35.3	11.8	0	-33.72	-34.91	-	-	-7	-27.91	34	132	H
3	5.925	-61.7	RMS	35.3	11.8	0	-33.72	-48.32	-27	-21.32	-	-	34	132	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 80402 (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.878668	-49.28	Pk	35.2	11.8	0	-33.61	-35.89	-	-	-7	-28.89	90	243	V
4	5.884401	-61.45	RMS	35.2	11.8	0	-33.46	-47.91	-27	-20.91	-	-	90	243	V
1	5.925	-51.79	Pk	35.3	11.8	0	-33.72	-38.41	-	-	-7	-31.41	90	243	V
3	5.925	-62.45	RMS	35.3	11.8	0	-33.72	-49.07	-27	-22.07	-	-	90	243	V

PK - Peak detector
RMS - RMS detection

1.1.5. 802.11be MIMO MODE IN UNII-5 BAND – SPURIOUS EMISSIONS

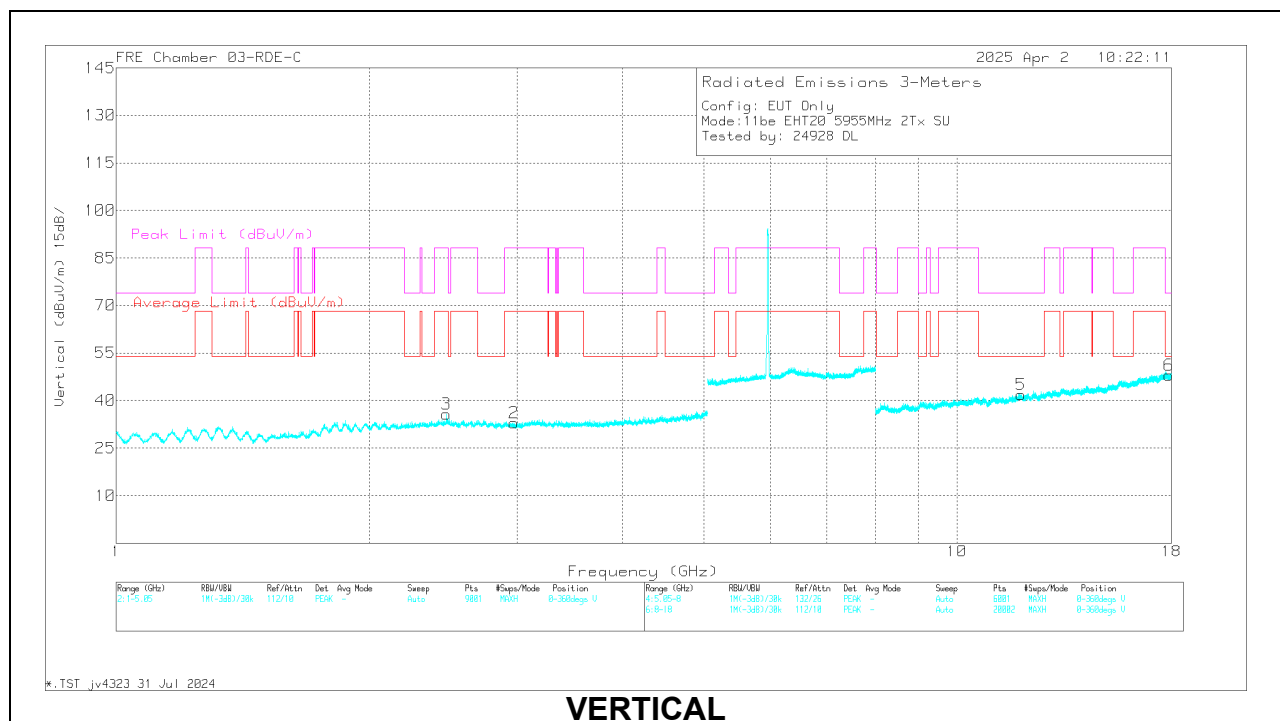
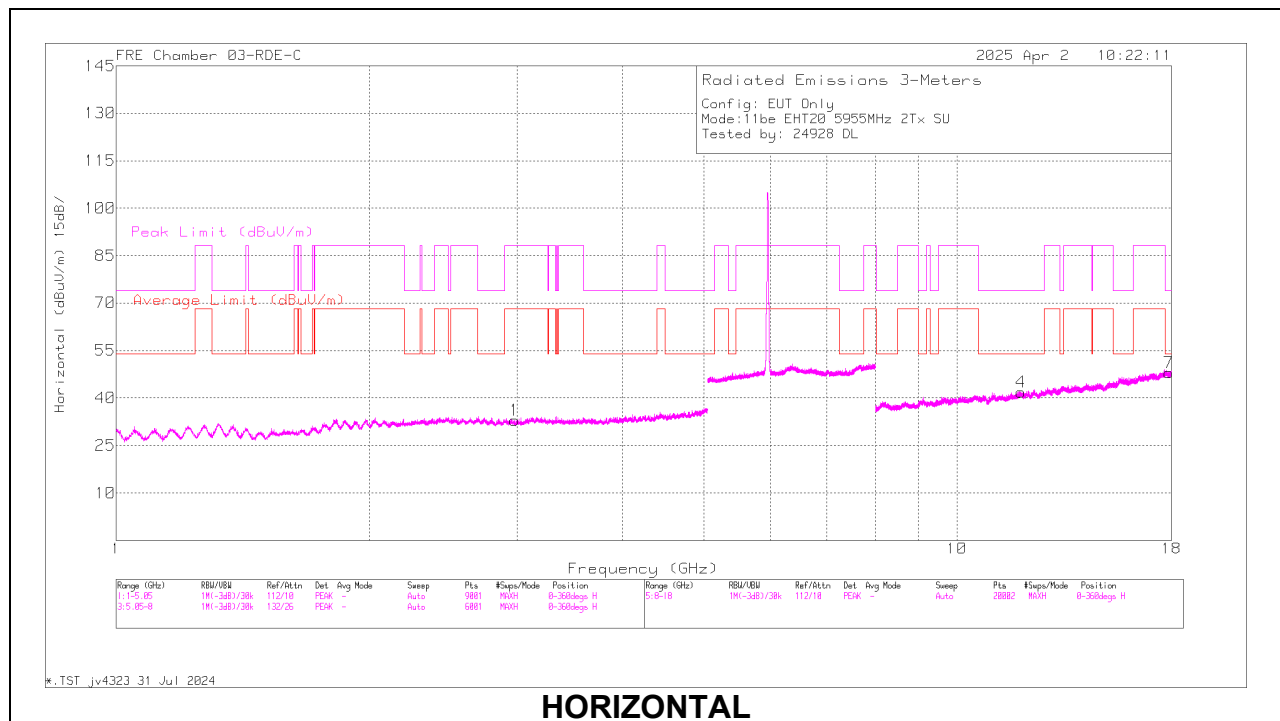
20MHz

UNII-5 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbi/ Filt/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5955	6 + 5	* 11.91472	55.25	PK-U	38.8	-42.3	0	51.75	-	-	74	-22.25	293	241	H
			* 11.914772	43.34	ADR	38.8	-42.3	0	39.84	54	-14.16	-	-	293	241	H
			* 17.870185	59.36	PK-U	41.7	-43.3	0	57.76	-	-	74	-16.24	117	208	H
			* 17.872889	47.86	ADR	41.7	-43.3	0	46.26	54	-7.74	-	-	117	208	H
			* 11.915046	55.25	PK-U	38.8	-42.3	0	51.75	-	-	74	-22.25	301	138	V
			* 11.911805	43.78	ADR	38.7	-42.3	0	40.18	54	-13.82	-	-	301	138	V
			* 17.865107	59.1	PK-U	41.7	-43.4	0	57.4	-	-	74	-16.6	255	267	V
			* 17.864583	47.89	ADR	41.7	-43.36	0	46.23	54	-7.77	-	-	255	267	V
			2.471576	60.36	PK-U	32.3	-48.2	0	44.46	-	-	88.2	-43.74	190	180	V
			2.473743	47.9	ADR	32.3	-48.1	0	32.1	68.2	-36.1	-	-	190	180	V
			2.973229	45.29	ADR	32.3	-46.7	0	30.89	68.2	-37.31	-	-	132	167	V
			2.974529	57.16	PK-U	32.3	-46.65	0	42.81	-	-	88.2	-45.39	132	167	V
	6175	6 + 5	* 12.339195	55.27	PK-U	38.9	-42.8	0	51.37	-	-	74	-22.63	33	235	H
			* 12.338933	43.55	ADR	38.9	-42.81	0	39.64	54	-14.36	-	-	33	235	H
			* 12.346984	55.34	PK-U	38.9	-42.7	0	51.54	-	-	74	-22.46	10	302	V
			* 12.345549	43.94	ADR	38.9	-42.7	0	40.14	54	-13.86	-	-	10	302	V
			2.411638	63.4	PK-U	32.2	-48.4	0	47.2	-	-	88.2	-41	359	249	V
			2.412226	47.84	ADR	32.2	-48.4	0	31.64	68.2	-36.56	-	-	359	249	V
			2.412735	59.92	PK-U	32.2	-48.4	0	43.72	-	-	88.2	-44.48	299	382	H
			2.414145	47.8	ADR	32.2	-48.3	0	31.7	68.2	-36.5	-	-	299	382	H
			3.087899	56.57	PK-U	32.8	-46.5	0	42.87	-	-	88.2	-45.33	207	236	H
			3.089592	45.07	ADR	32.8	-46.46	0	31.41	68.2	-36.79	-	-	207	236	H
			3.089659	44.79	ADR	32.8	-46.47	0	31.12	68.2	-37.08	-	-	213	194	V
			3.090435	56.67	PK-U	32.8	-46.5	0	42.97	-	-	88.2	-45.23	213	194	V
	6415	6 + 5	2.139211	47.58	ADR	31.3	-48	0	30.88	68.2	-37.32	-	-	53	184	V
			2.139319	59.8	PK-U	31.3	-48	0	43.1	-	-	88.2	-45.1	93	352	H
			2.139549	59.8	PK-U	31.3	-48	0	43.1	-	-	88.2	-45.1	53	184	V
			2.141362	47.74	ADR	31.3	-48	0	31.04	68.2	-37.16	-	-	93	352	H
			3.200947	44.61	ADR	33	-46.1	0	31.51	68.2	-36.69	-	-	357	103	V
			3.202375	56.51	PK-U	33	-46.1	0	43.41	-	-	88.2	-44.79	357	103	V
			3.210108	55.99	PK-U	33	-46	0	42.99	-	-	88.2	-45.21	174	194	H
			3.210622	44.49	ADR	33	-46	0	31.49	68.2	-36.71	-	-	174	194	H
			12.829356	44.58	ADR	39.3	-44.3	0	39.58	68.2	-28.62	-	-	272	184	H
			12.830895	56.29	PK-U	39.3	-44.3	0	51.29	-	-	88.2	-36.91	272	184	H
			12.831318	44.55	ADR	39.3	-44.33	0	39.52	68.2	-28.68	-	-	346	264	V
			12.831859	56.33	PK-U	39.3	-44.39	0	51.24	-	-	88.2	-36.96	346	264	V
11be (Partial RU Mode / Highest PSD)	5955 (26T)	6 + 5	2.978098	59.28	PK-U	32.7	-49.02	0	42.96	-	-	88.2	-45.24	94	335	V
			2.978808	47.89	ADR	32.7	-49.02	0	31.57	68.2	-36.63	-	-	94	335	V
			2.979081	47.73	ADR	32.7	-49.02	0	31.41	68.2	-36.79	-	-	360	312	H
			2.981498	59.21	PK-U	32.7	-49.02	0	42.89	-	-	88.2	-45.31	360	312	H
			* 11.922916	43.36	ADR	38.7	-43.99	0	38.07	54	-15.93	-	-	236	329	V
			* 11.92298	43.59	ADR	38.7	-43.98	0	38.31	54	-15.69	-	-	21	126	H
			* 11.923837	54.56	PK-U	38.7	-44.1	0	49.16	-	-	74	-24.84	236	329	V
			* 11.924588	54.94	PK-U	38.7	-44.12	0	49.52	-	-	74	-24.48	21	126	H
			* 17.877305	56	PK-U	41.4	-42.95	0	54.45	-	-	74	-19.55	287	225	V
			* 17.878292	44.05	ADR	41.4	-42.95	0	42.5	54	-11.5	-	-	287	225	V
			* 17.879312	43.8	ADR	41.4	-42.98	0	42.22	54	-11.78	-	-	120	101	H
			* 17.879481	55.43	PK-U	41.4	-42.98	0	53.85	-	-	74	-20.15	120	101	H
	6175 (26T)	6 + 5	2.057123	49.32	ADR	31.4	-50.69	0	30.03	68.2	-38.17	-	-	117	216	V
			2.057561	60.58	PK-U	31.4	-50.7	0	41.28	-	-	88.2	-46.92	117	216	V
			2.057847	49.19	ADR	31.4	-50.7	0	29.89	68.2	-38.31	-	-	338	390	H
			2.060647	60.76	PK-U	31.4	-50.69	0	41.47	-	-	88.2	-46.73	338	390	H
			3.091482	47.08	ADR	33	-48.84	0	31.24	68.2	-36.96	-	-	193	268	H
			3.092262	59.11	PK-U	33	-48.85	0	43.26	-	-	88.2	-44.94	193	268	H
			3.093216	47.52	ADR	33	-48.86	0	31.66	68.2	-36.54	-	-	65	101	V
			3.096718	58.78	PK-U	33	-48.85	0	42.93	-	-	88.2	-45.27	65	101	V
			* 12.356402	43.81	ADR	38.9	-43.49	0	39.22	54	-14.78	-	-	343	267	V
			* 12.356728	54.88	PK-U	38.9	-43.48	0	50.3	-	-	74	-23.7	343	267	V
			* 12.357892	55.33	PK-U	38.9	-43.47	0	50.76	-	-	74	-23.24	196	110	H
			* 12.358287	43.54	ADR	38.9	-43.46	0	38.98	54	-15.02	-	-	196	110	H
	6415 (26T)	6 + 5	2.136018	49.84	ADR	31.6	-50.55	0	30.89	68.2	-37.31	-	-	351	163	V
			2.137517	49.86	ADR	31.6	-50.54	0	30.92	68.2	-37.28	-	-	68	364	H
			2.137851	61.27	PK-U	31.6	-50.55	0	42.32	-	-	88.2	-45.88	68	364	H
			2.138134	61.67	PK-U	31.6	-50.56	0	42.71	-	-	88.2	-45.49	351	163	V
			3.204551	47.24	ADR	33.3	-48.45	0	32.09	68.2	-36.11	-	-	320	327	H
			3.205152	58.78	PK-U	33.3	-48.44	0	43.64	-	-	88.2	-44.56	320	327	H
			3.207246	58.6	PK-U	33.3	-48.41	0	43.49	-	-	88.2	-44.71	254	341	V
			3.209512	47.54	ADR	33.3	-48.39	0	32.45	68.2	-35.75	-	-	254	341	V
			12.834507	55.13	PK-U	39.3	-44.31	0	50.12	-	-	88.2	-38.08	323	301	H
			12.835735	55.23	PK-U	39.3	-44.32	0	50.21	-	-	88.2	-37.99	256	360	V
			12.836127	43.44	ADR	39.3	-44.33	0	38.41	68.2	-29.79	-	-	323	301	H
			12.836365	43.77	ADR	39.3	-44.34	0	38.73	68.2	-29.47	-	-	256	360	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5955MHz)

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.91472	55.25	PK-U	38.8	0	-42.3	51.75	-	-	74	-22.25	293	241	H
* 11.914772	43.34	ADR	38.8	0	-42.3	39.84	54	-14.16	-	-	293	241	H
* 17.870185	59.36	PK-U	41.7	0	-43.3	57.76	-	-	74	-16.24	117	208	H
* 17.872889	47.86	ADR	41.7	0	-43.3	46.26	54	-7.74	-	-	117	208	H
* 11.915046	55.25	PK-U	38.8	0	-42.3	51.75	-	-	74	-22.25	301	138	V
* 11.911805	43.78	ADR	38.7	0	-42.3	40.18	54	-13.82	-	-	301	138	V
* 17.865107	59.1	PK-U	41.7	0	-43.4	57.4	-	-	74	-16.6	255	267	V
* 17.864583	47.89	ADR	41.7	0	-43.36	46.23	54	-7.77	-	-	255	267	V
2.471576	60.36	PK-U	32.3	0	-48.2	44.46	-	-	88.2	-43.74	190	180	V
2.473743	47.9	ADR	32.3	0	-48.1	32.1	68.2	-36.1	-	-	190	180	V
2.973229	45.29	ADR	32.3	0	-46.7	30.89	68.2	-37.31	-	-	132	167	V
2.974529	57.16	PK-U	32.3	0	-46.65	42.81	-	-	88.2	-45.39	132	167	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

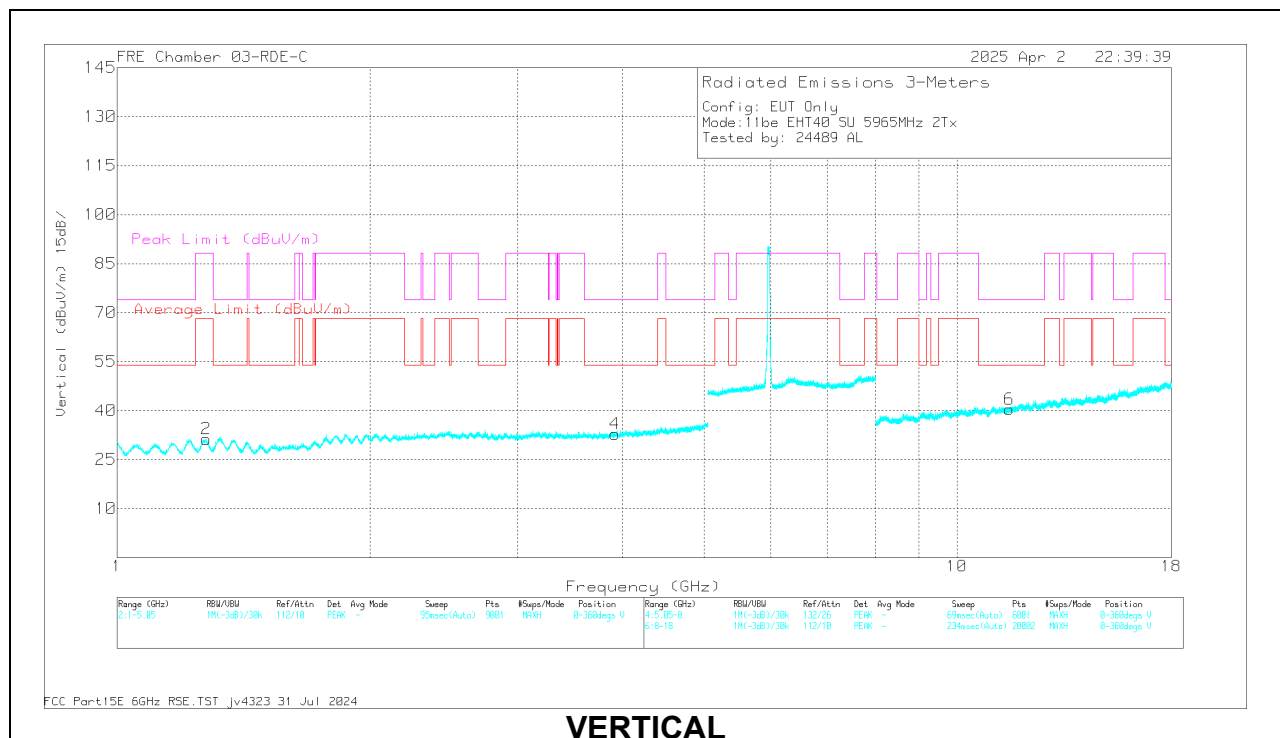
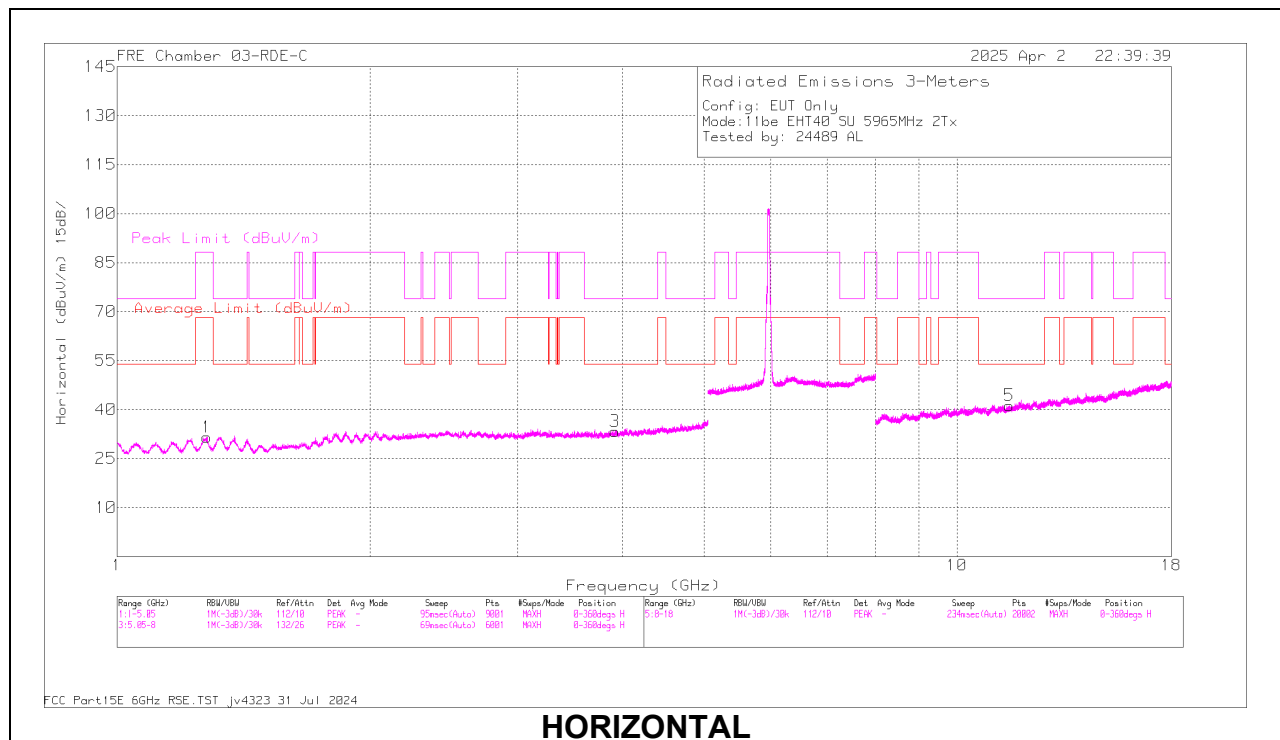
40MHz

UNII-5 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5965	6 + 5	* 1.277472	59.65	PK-U	29.4	-47.9	0	41.15	-	-	88.2	-47.05	0	199	H
			* 1.277081	48.14	ADR	29.4	-47.9	0	29.64	68.2	-38.56	-	-	0	199	H
			* 3.915545	56.38	PK-U	33.3	-45.85	0	43.83	-	-	74	-30.17	0	199	H
			* 3.914139	44.26	ADR	33.3	-45.9	0	31.66	54	-22.34	-	-	0	199	H
			* 1.276838	60.05	PK-U	29.4	-47.9	0	41.55	-	-	88.2	-46.65	0	101	V
			* 1.274993	48.27	ADR	29.4	-47.9	0	29.77	68.2	-38.43	-	-	0	101	V
			* 3.917174	56.14	PK-U	33.3	-45.8	0	43.64	-	-	74	-30.36	0	198	V
			* 3.917061	44.06	ADR	33.3	-45.8	0	31.56	54	-22.44	-	-	0	198	V
			* 11.540267	55.62	PK-U	38.3	-43.1	0	50.82	-	-	74	-23.18	0	101	H
			* 11.5419	43.96	ADR	38.3	-43.1	0	39.16	54	-14.84	-	-	0	101	H
			* 11.544043	55.4	PK-U	38.3	-43	0	50.7	-	-	74	-23.3	0	101	V
			* 11.543892	44.23	ADR	38.3	-43	0	39.53	54	-14.47	-	-	0	101	V
	6165	6 + 5	* 1.27367	59.78	PK-U	29.4	-47.83	0	41.35	-	-	88.2	-46.85	0	101	H
			* 1.275492	48.45	ADR	29.4	-47.9	0	29.95	68.2	-38.25	-	-	0	101	H
			* 3.945195	55.42	PK-U	33.4	-45.8	0	43.02	-	-	74	-30.98	0	101	H
			* 3.942899	43.62	ADR	33.4	-45.8	0	31.22	54	-22.78	-	-	0	101	H
			* 1.272677	60.4	PK-U	29.3	-47.9	0	41.8	-	-	88.2	-46.4	0	101	V
			* 1.275506	48.38	ADR	29.4	-47.9	0	29.88	68.2	-38.32	-	-	0	101	V
			* 3.944968	55.48	PK-U	33.4	-45.8	0	43.08	-	-	74	-30.92	0	199	V
			* 3.945311	43.76	ADR	33.4	-45.8	0	31.36	54	-22.64	-	-	0	199	V
			* 11.620479	56.15	PK-U	38.4	-43.3	0	51.25	-	-	74	-22.75	0	199	H
			* 11.622707	44.1	ADR	38.4	-43.3	0	39.2	54	-14.8	-	-	0	199	H
			* 11.623346	55.49	PK-U	38.4	-43.33	0	50.56	-	-	74	-23.44	0	101	V
			* 11.62282	44.01	ADR	38.4	-43.3	0	39.11	54	-14.89	-	-	0	101	V
	6405	6 + 5	* 1.283976	59.31	PK-U	29.4	-47.8	0	40.91	-	-	88.2	-47.29	2	199	H
			* 1.281529	47.57	ADR	29.4	-47.85	0	29.12	68.2	-39.08	-	-	2	199	H
			* 3.842208	55.07	PK-U	33	-45.8	0	42.27	-	-	74	-31.73	2	199	H
			* 3.844001	43.72	ADR	33	-45.8	0	30.92	54	-23.08	-	-	2	199	H
			* 1.282443	58.58	PK-U	29.4	-47.86	0	40.12	-	-	88.2	-48.08	2	101	V
			* 1.282669	47.17	ADR	29.4	-47.83	0	28.74	68.2	-39.46	-	-	2	101	V
			* 3.842884	55.24	PK-U	33	-45.8	0	42.44	-	-	74	-31.56	2	101	V
			* 3.842268	43.58	ADR	33	-45.8	0	30.78	54	-23.22	-	-	2	101	V
			* 11.306103	55.18	PK-U	38.1	-43.2	0	50.08	-	-	74	-23.92	2	101	H
			* 11.304448	43.99	ADR	38.1	-43.24	0	38.85	54	-15.15	-	-	2	101	H
			* 11.305557	55.48	PK-U	38.1	-43.24	0	50.34	-	-	74	-23.66	2	101	V
			* 11.304311	43.86	ADR	38.1	-43.23	0	38.73	54	-15.27	-	-	2	101	V
11be (Partial RU Mode / Highest PSD)	5965 (26T)	6 + 5	2.433779	60.56	PK-U	32.5	-50.09	0	42.97	-	-	88.2	-45.23	231	393	H
			2.436792	48.8	ADR	32.5	-50.09	0	31.21	68.2	-36.99	-	-	231	393	H
			* 3.790746	57.5	PK-U	33.4	-47.51	0	43.39	-	-	74	-30.61	31	109	H
			* 3.764722	45.59	ADR	33.4	-47.41	0	31.58	54	-22.42	-	-	31	109	H
			2.437795	60.29	PK-U	32.5	-50.11	0	42.68	-	-	88.2	-45.52	62	169	V
			2.436337	48.81	ADR	32.5	-50.08	0	31.23	68.2	-36.97	-	-	62	169	V
			* 3.788693	58.21	PK-U	33.4	-47.57	0	44.04	-	-	74	-29.96	348	127	V
			* 3.797519	45.78	ADR	33.4	-47.56	0	31.62	54	-22.38	-	-	348	127	V
			14.461701	55.33	PK-U	39.2	-43.64	0	50.89	-	-	88.2	-37.31	287	362	H
			* 14.488222	43.65	ADR	39.2	-43.48	0	39.37	54	-14.63	-	-	287	362	H
			* 14.480767	55.73	PK-U	39.2	-43.69	0	51.24	-	-	74	-22.76	85	349	V
			* 14.484175	43.62	ADR	39.2	-43.62	0	39.2	54	-14.8	-	-	85	349	V
	6165 (26T)	6 + 5	* 2.28322	61.05	PK-U	31.8	-50.28	0	42.57	-	-	74	-31.43	170	236	H
			* 2.283637	49.24	ADR	31.8	-50.28	0	30.76	54	-23.24	-	-	170	236	H
			* 3.779013	57.56	PK-U	33.4	-47.42	0	43.54	-	-	74	-30.46	14	392	H
			* 3.761473	45.93	ADR	33.4	-47.46	0	31.87	54	-22.13	-	-	14	392	H
			* 2.318392	60.71	PK-U	32	-49.94	0	42.77	-	-	74	-31.23	176	105	V
			* 2.293959	49.15	ADR	31.9	-50.2	0	30.85	54	-23.15	-	-	176	105	V
			* 3.76153	57.48	PK-U	33.4	-47.45	0	43.43	-	-	74	-30.57	150	238	V
			* 3.751682	45.84	ADR	33.4	-47.43	0	31.81	54	-22.19	-	-	150	238	V
			14.040579	56.19	PK-U	39.1	-43.38	0	51.91	-	-	88.2	-36.29	297	250	H
			14.024361	44.61	ADR	39.1	-43.64	0	40.07	68.2	-28.13	-	-	297	250	H
			14.040399	55.88	PK-U	39.1	-43.37	0	51.61	-	-	88.2	-36.59	327	302	V
			14.03038	44.22	ADR	39.1	-43.53	0	39.79	68.2	-28.41	-	-	327	302	V
	6405 (26T)	6 + 5	2.394696	60.45	PK-U	32.3	-50.07	0	42.68	-	-	88.2	-45.52	250	297	H
			2.401269	48.59	ADR	32.4	-50.11	0	30.88	68.2	-37.32	-	-	250	297	H
			* 3.912773	58.36	PK-U	33.5	-47.84	0	44.02	-	-	74	-29.98	262	219	H
			* 3.91591	46.31	ADR	33.5	-47.88	0	31.93	54	-22.07	-	-	262	219	H
			2.428397	60.45	PK-U	32.5	-50.1	0	42.85	-	-	88.2	-45.35	210	366	V
			2.398934	48.65	ADR	32.4	-50.12	0	30.93	68.2	-37.27	-	-	210	366	V
			* 3.912577	57.97	PK-U	33.5	-47.84	0	43.63	-	-	74	-30.37	158	350	V
			* 3.907062	46.28	ADR	33.5	-47.78	0	32	54	-22	-	-	158	350	V
			14.421106	55.03	PK-U	39.2	-43.52	0	50.71	-	-	88.2	-37.49	346	250	H
			14.431617	43.71	ADR	39.2	-43.2	0	39.71	68.2	-28.49	-	-	346	250	H
			14.420227	55.49	PK-U	39.2	-43.53	0	51.16	-	-	88.2	-37.04	141	289	V
			14.426582	43.48	ADR	39.2	-43.4	0	39.28	68.2	-28.92	-	-	141	289	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5965MHz)

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.277472	59.65	PK-U	29.4	0	-47.9	41.15	-	-	88.2	-47.05	0	199	H
* 1.277081	48.14	ADR	29.4	0	-47.9	29.64	68.2	-38.56	-	-	0	199	H
* 3.915545	56.38	PK-U	33.3	0	-45.85	43.83	-	-	74	-30.17	0	199	H
* 3.914139	44.26	ADR	33.3	0	-45.9	31.66	54	-22.34	-	-	0	199	H
* 1.276838	60.05	PK-U	29.4	0	-47.9	41.55	-	-	88.2	-46.65	0	101	V
* 1.274993	48.27	ADR	29.4	0	-47.9	29.77	68.2	-38.43	-	-	0	101	V
* 3.917174	56.14	PK-U	33.3	0	-45.8	43.64	-	-	74	-30.36	0	198	V
* 3.917061	44.06	ADR	33.3	0	-45.8	31.56	54	-22.44	-	-	0	198	V
* 11.540267	55.62	PK-U	38.3	0	-43.1	50.82	-	-	74	-23.18	0	101	H
* 11.5419	43.96	ADR	38.3	0	-43.1	39.16	54	-14.84	-	-	0	101	H
* 11.544043	55.4	PK-U	38.3	0	-43	50.7	-	-	74	-23.3	0	101	V
* 11.543892	44.23	ADR	38.3	0	-43	39.53	54	-14.47	-	-	0	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

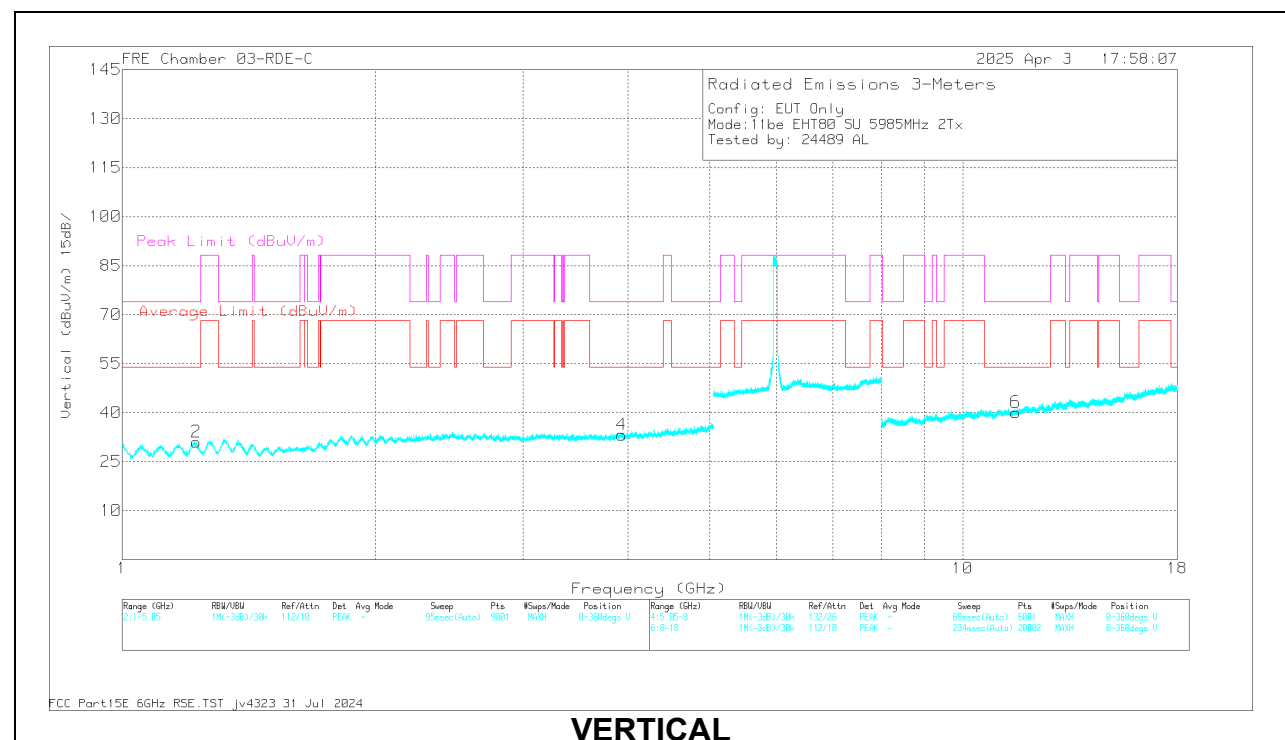
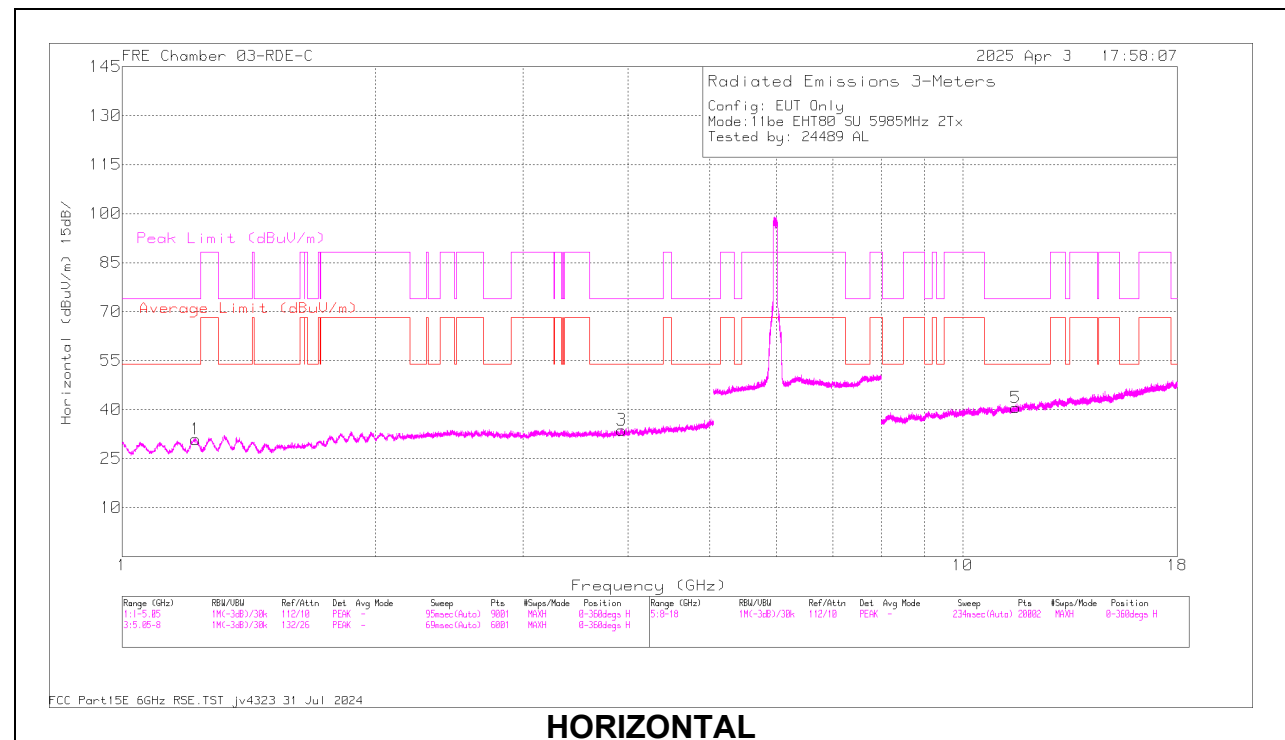
80MHz

UNI-5 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5985	6 + 5	* 1.22413	59.89	PK-U	29	-47.99	0	40.9	-	-	74	-33.1	1	101	H
			* 1.221293	48.47	ADR	29	-48	0	29.47	54	-24.53	-	-	1	101	H
			* 3.928147	56.79	PK-U	33.3	-45.8	0	44.29	-	-	74	-29.71	1	101	H
			* 3.928952	44.56	ADR	33.3	-45.8	0	32.06	54	-21.94	-	-	1	101	H
			* 1.223329	59.89	PK-U	29	-48	0	40.89	-	-	74	-33.11	1	101	V
			* 1.223782	48.28	ADR	29	-48	0	29.28	54	-24.72	-	-	1	101	V
			* 3.928854	56.1	PK-U	33.3	-45.8	0	43.6	-	-	74	-30.4	1	101	V
			* 3.92994	44.67	ADR	33.3	-45.8	0	32.17	54	-21.83	-	-	1	101	V
			* 11.562239	55.75	PK-U	38.4	-43.32	0	50.83	-	-	74	-23.17	1	199	H
			* 11.561485	43.97	ADR	38.4	-43.3	0	39.07	54	-14.93	-	-	1	199	H
			* 11.563305	55.95	PK-U	38.4	-43.4	0	50.95	-	-	74	-23.05	1	101	V
			* 11.561966	44.19	ADR	38.4	-43.3	0	39.29	54	-14.71	-	-	1	101	V
		6 + 5	* 1.332052	59.81	PK-U	29.3	-47.71	0	41.4	-	-	74	-32.6	1	101	H
			* 1.331372	48.14	ADR	29.3	-47.76	0	29.68	54	-24.32	-	-	1	101	H
			* 3.817026	56.29	PK-U	33	-45.9	0	43.39	-	-	74	-30.61	1	101	H
			* 3.818836	44.39	ADR	33	-45.8	0	31.59	54	-22.41	-	-	1	101	H
			* 1.330648	60.3	PK-U	29.3	-47.8	0	41.8	-	-	74	-32.2	1	101	V
			* 1.330796	48.3	ADR	29.3	-47.8	0	29.8	54	-24.2	-	-	1	101	V
			* 3.814485	56.14	PK-U	32.9	-45.8	0	43.24	-	-	74	-30.76	1	101	V
			* 3.813777	44.49	ADR	32.9	-45.78	0	31.61	54	-22.39	-	-	1	101	V
			* 11.423263	55.9	PK-U	38.2	-43.77	0	50.33	-	-	74	-23.67	1	101	H
			* 11.42399	44.06	ADR	38.2	-43.7	0	38.56	54	-15.44	-	-	1	101	H
			* 11.42159	55.81	PK-U	38.2	-43.8	0	50.21	-	-	74	-23.79	1	101	V
			* 11.421739	43.96	ADR	38.2	-43.8	0	38.36	54	-15.64	-	-	1	101	V
	6385	6 + 5	* 1.32515	60.26	PK-U	29.3	-47.8	0	41.76	-	-	74	-32.24	1	101	H
			* 1.324845	48.63	ADR	29.3	-47.8	0	30.13	54	-23.87	-	-	1	101	H
			* 4.006453	55.58	PK-U	33.4	-45.9	0	43.08	-	-	74	-30.92	1	101	H
			* 4.004252	44.23	ADR	33.4	-45.9	0	31.73	54	-22.27	-	-	1	101	H
			* 1.328401	60.27	PK-U	29.3	-47.8	0	41.77	-	-	74	-32.23	1	101	V
			* 1.329856	48.62	ADR	29.3	-47.8	0	30.12	54	-23.88	-	-	1	101	V
			* 4.003658	55.71	PK-U	33.4	-45.9	0	43.21	-	-	74	-30.79	1	101	V
			* 4.004344	44.09	ADR	33.4	-45.9	0	31.59	54	-22.41	-	-	1	101	V
			* 11.824696	55.42	PK-U	38.7	-42.7	0	51.42	-	-	74	-22.58	1	199	H
			* 11.825774	43.38	ADR	38.7	-42.7	0	39.38	54	-14.62	-	-	1	199	H
			* 11.824544	56.04	PK-U	38.7	-42.7	0	52.04	-	-	74	-21.96	1	199	V
			* 11.822329	43.4	ADR	38.6	-42.8	0	39.2	54	-14.8	-	-	1	199	V
11be (Partial RU Mode / Highest PSD)	5985 (26T)	6 + 5	2.50216	60.84	PK-U	32.2	-50.06	0	42.98	-	-	88.2	-45.22	5	342	H
			2.501085	49.64	ADR	32.2	-50.09	0	31.75	68.2	-36.45	-	-	5	342	H
			* 3.854307	58.06	PK-U	33.4	-47.68	0	43.78	-	-	74	-30.22	357	281	H
			* 3.817289	45.92	ADR	33.4	-47.69	0	31.63	54	-22.37	-	-	357	281	H
			2.500581	60.55	PK-U	32.2	-50.1	0	42.65	-	-	88.2	-45.55	95	290	V
			2.501875	49.34	ADR	32.2	-50.06	0	31.48	68.2	-36.72	-	-	95	290	V
			* 3.846503	57.71	PK-U	33.4	-47.72	0	43.39	-	-	74	-30.61	343	132	V
			* 3.816702	45.79	ADR	33.4	-47.69	0	31.5	54	-22.5	-	-	343	132	V
			* 14.482015	55.05	PK-U	39.2	-43.71	0	50.54	-	-	74	-23.46	26	210	H
			* 14.487871	43.89	ADR	39.2	-43.49	0	39.6	54	-14.4	-	-	26	210	H
			* 14.489566	55.67	PK-U	39.2	-43.46	0	51.41	-	-	74	-22.59	174	360	V
			* 14.481887	43.66	ADR	39.2	-43.71	0	39.15	54	-14.85	-	-	174	360	V
		6 + 5	* 2.32528	61.01	PK-U	32.1	-49.93	0	43.18	-	-	74	-30.82	135	260	H
			* 2.326618	48.95	ADR	32.1	-49.94	0	31.11	54	-22.89	-	-	135	260	H
			* 3.665999	57.97	PK-U	33.3	-47.59	0	43.68	-	-	74	-30.32	212	381	H
			* 3.648623	46.37	ADR	33.3	-47.65	0	32.02	54	-21.98	-	-	212	381	H
			* 2.330994	60.6	PK-U	32.1	-49.95	0	42.75	-	-	74	-31.25	163	171	V
			* 2.341096	48.94	ADR	32.1	-49.96	0	31.08	54	-22.92	-	-	163	171	V
			* 3.648091	58.16	PK-U	33.3	-47.64	0	43.82	-	-	74	-30.18	88	178	V
			* 3.64658	46.28	ADR	33.3	-47.66	0	31.92	54	-22.08	-	-	88	178	V
			* 11.956242	55.11	PK-U	39	-43.73	0	50.38	-	-	74	-23.62	246	218	H
			* 11.973977	43.12	ADR	39	-43.44	0	38.68	54	-15.32	-	-	246	218	H
			* 11.968698	54.86	PK-U	39	-43.49	0	50.37	-	-	74	-23.63	314	284	V
			* 11.968078	43.06	ADR	39	-43.51	0	38.55	54	-15.45	-	-	314	284	V
	6385 (26T)	6 + 5	2.483396	61.58	PK-U	32.2	-50.16	0	43.62	-	-	88.2	-44.58	225	375	H
			* 2.497514	49.24	ADR	32.2	-50.13	0	31.31	54	-22.69	-	-	225	375	H
			* 3.896211	57.5	PK-U	33.5	-47.76	0	43.24	-	-	74	-30.76	116	157	H
			* 3.870601	46.16	ADR	33.5	-47.81	0	31.85	54	-22.15	-	-	116	157	H
			2.502227	63.5	PK-U	32.2	-50.06	0	45.64	-	-	88.2	-42.56	335	292	V
			* 2.497059	49.26	ADR	32.2	-50.14	0	31.32	54	-22.68	-	-	335	292	V
			* 3.899774	57.91	PK-U	33.5	-47.83	0	43.58	-	-	74	-30.42	58	361	V
			* 3.90508	46.26	ADR	33.5	-47.79	0	31.97	54	-22.03	-	-	58	361	V
			14.017139	55.94	PK-U	39.1	-43.78	0	51.26	-	-	88.2	-36.94	220	258	H
			14.021259	44.39	ADR	39.1	-43.71	0	39.78	68.2	-28.42	-	-	220	258	H
			14.049262	56.48	PK-U	39.1	-43.57	0	52.01	-	-	88.2	-36.19	127	263	V
			14.026321	44.31	ADR	39.1	-43.56	0	39.85	68.2	-28.35	-	-	127	263	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5985MHz)

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.22413	59.89	PK-U	29	0	-47.99	40.9	-	-	74	-33.1	1	101	H
1	* 1.221293	48.47	ADR	29	0	-48	29.47	54	-24.53	-	-	1	101	H
3	* 3.928147	56.79	PK-U	33.3	0	-45.8	44.29	-	-	74	-29.71	1	101	H
3	* 3.928952	44.56	ADR	33.3	0	-45.8	32.06	54	-21.94	-	-	1	101	H
2	* 1.223329	59.89	PK-U	29	0	-48	40.89	-	-	74	-33.11	1	101	V
2	* 1.223782	48.28	ADR	29	0	-48	29.28	54	-24.72	-	-	1	101	V
4	* 3.928854	56.1	PK-U	33.3	0	-45.8	43.6	-	-	74	-30.4	1	101	V
4	* 3.92994	44.67	ADR	33.3	0	-45.8	32.17	54	-21.83	-	-	1	101	V
5	* 11.562239	55.75	PK-U	38.4	0	-43.32	50.83	-	-	74	-23.17	1	199	H
5	* 11.561485	43.97	ADR	38.4	0	-43.3	39.07	54	-14.93	-	-	1	199	H
6	* 11.563305	55.95	PK-U	38.4	0	-43.4	50.95	-	-	74	-23.05	1	101	V
6	* 11.561966	44.19	ADR	38.4	0	-43.3	39.29	54	-14.71	-	-	1	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

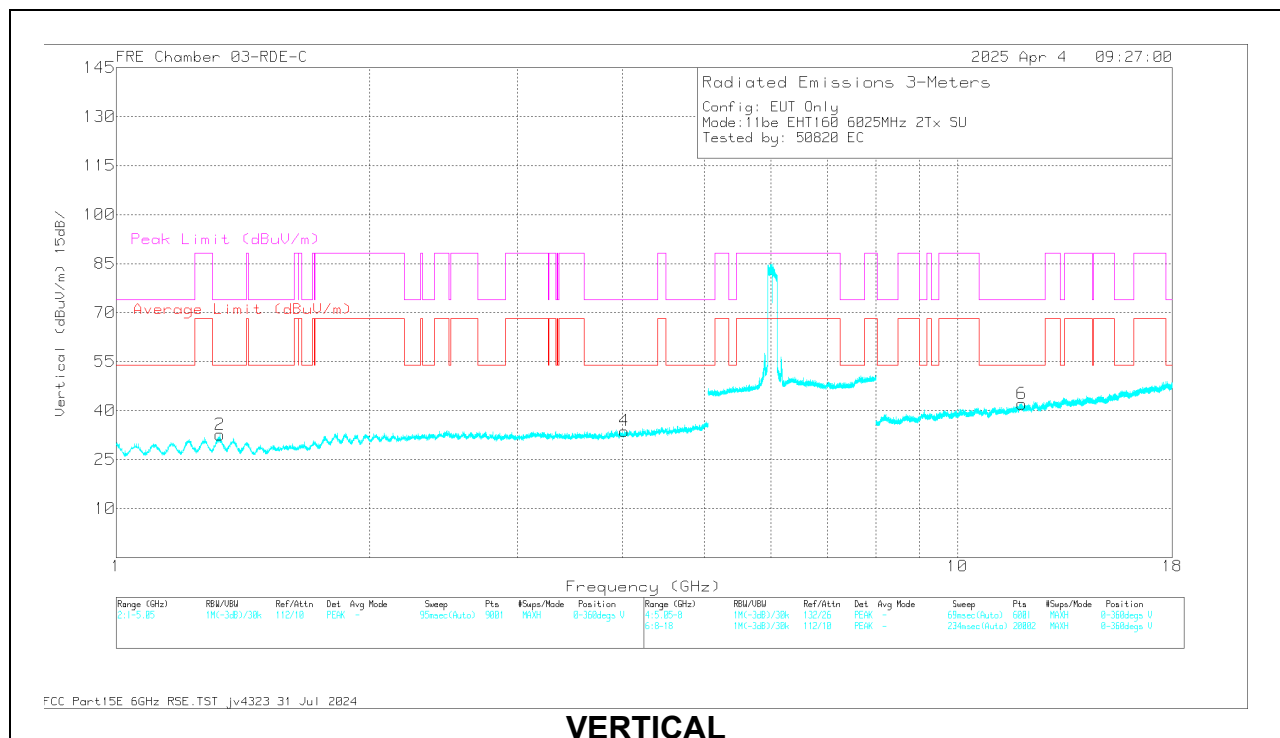
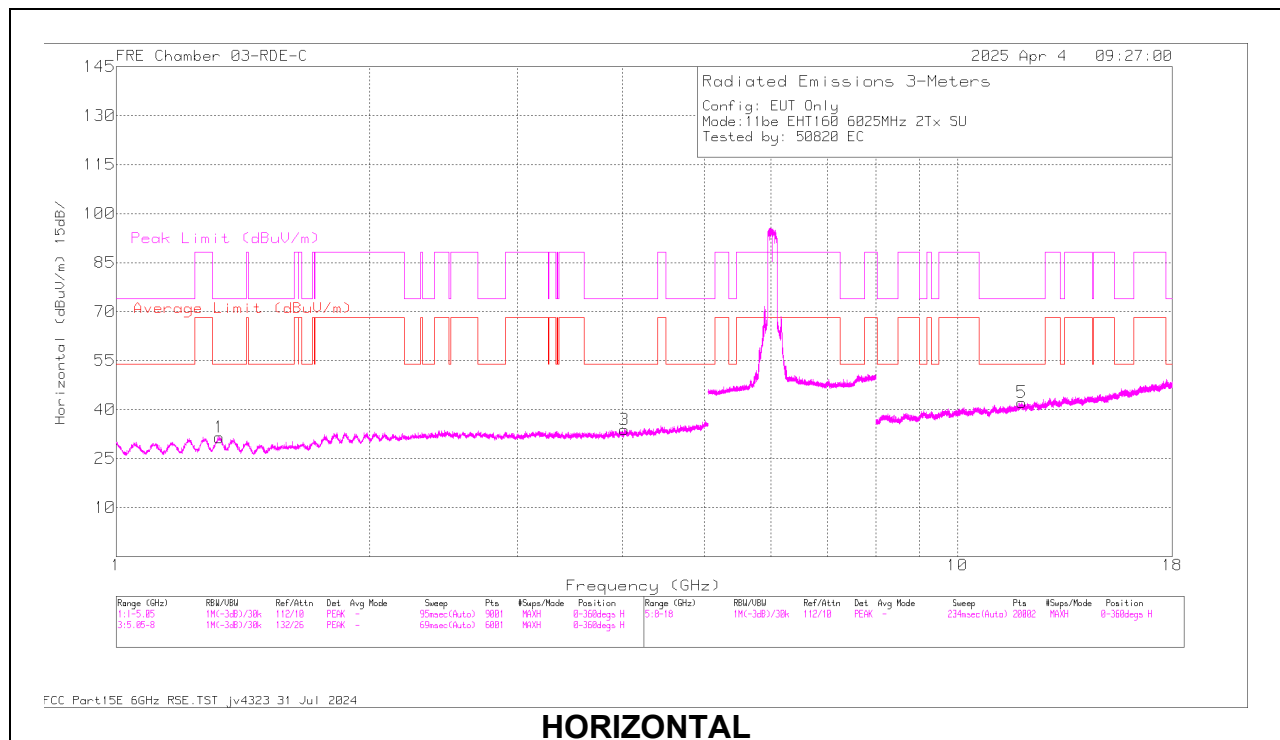
160MHz

UNII-5 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6025	6 + 5	* 1.325125	60.16	PK-U	29.3	-47.8	0	41.66	-	-	74	-32.34	341	170	H
			* 1.323251	48.42	ADR	29.3	-47.8	0	29.92	54	-24.08	-	-	341	170	H
			* 4.021934	55.94	PK-U	33.4	-46	0	43.34	-	-	74	-30.66	12	305	H
			* 4.022626	43.94	ADR	33.4	-45.94	0	31.4	54	-22.6	-	-	12	305	H
			* 1.327024	59.93	PK-U	29.3	-47.8	0	41.43	-	-	74	-32.57	140	111	V
			* 1.325759	48.57	ADR	29.3	-47.8	0	30.07	54	-23.93	-	-	140	111	V
			* 4.021685	55.86	PK-U	33.4	-46	0	43.26	-	-	74	-30.74	209	244	V
			* 4.021394	44.01	ADR	33.4	-46	0	31.41	54	-22.59	-	-	209	244	V
			* 11.920662	54.44	PK-U	38.8	-42.3	0	50.94	-	-	74	-23.06	164	172	H
			* 11.920179	42.84	ADR	38.8	-42.3	0	39.34	54	-14.66	-	-	164	172	H
			* 11.928488	55.22	PK-U	38.8	-42.6	0	51.42	-	-	74	-22.58	188	314	V
			* 11.927314	43.12	ADR	38.8	-42.6	0	39.32	54	-14.68	-	-	188	314	V
			* 1.321855	59.82	PK-U	29.3	-47.8	0	41.32	-	-	74	-32.68	61	120	H
			* 1.322442	48.5	ADR	29.3	-47.8	0	30	54	-24	-	-	61	120	H
			* 4.09345	56.35	PK-U	33.4	-46.15	0	43.6	-	-	74	-30.4	294	306	H
			* 4.091427	44.14	ADR	33.4	-46.2	0	31.34	54	-22.66	-	-	294	306	H
			* 1.323302	60.49	PK-U	29.3	-47.8	0	41.99	-	-	74	-32.01	183	287	V
			* 1.324845	48.39	ADR	29.3	-47.8	0	29.89	54	-24.11	-	-	183	287	V
			* 4.091294	55.92	PK-U	33.4	-46.2	0	43.12	-	-	74	-30.88	76	102	V
			* 4.091142	44.26	ADR	33.4	-46.2	0	31.46	54	-22.54	-	-	76	102	V
			* 11.914271	55.17	PK-U	38.8	-42.3	0	51.67	-	-	74	-22.33	340	159	H
			* 11.912066	42.94	ADR	38.7	-42.3	0	39.34	54	-14.66	-	-	340	159	H
			* 11.91373	54.81	PK-U	38.8	-42.3	0	51.31	-	-	74	-22.69	250	158	V
			* 11.911627	42.83	ADR	38.7	-42.3	0	39.23	54	-14.77	-	-	250	158	V
	6185	6 + 5	* 1.324915	59.98	PK-U	29.3	-47.8	0	41.48	-	-	74	-32.52	207	157	H
			* 1.324536	48.34	ADR	29.3	-47.8	0	29.84	54	-24.16	-	-	207	157	H
			* 4.230561	56.43	PK-U	33.6	-46.5	0	43.53	-	-	74	-30.47	208	334	H
			* 4.230018	44.51	ADR	33.6	-46.5	0	31.61	54	-22.39	-	-	208	334	H
			* 1.324302	60.72	PK-U	29.3	-47.8	0	42.22	-	-	74	-31.78	141	134	V
			* 1.324659	48.36	ADR	29.3	-47.8	0	29.86	54	-24.14	-	-	141	134	V
			* 4.225802	56.39	PK-U	33.6	-46.4	0	43.59	-	-	74	-30.41	209	241	V
			* 4.226861	44.28	ADR	33.6	-46.4	0	31.48	54	-22.52	-	-	209	241	V
			* 11.898981	54.35	PK-U	38.7	-42.6	0	50.45	-	-	74	-23.55	184	315	H
			* 11.899621	42.82	ADR	38.7	-42.54	0	38.98	54	-15.02	-	-	184	315	H
			* 11.922099	54.49	PK-U	38.8	-42.31	0	50.98	-	-	74	-23.02	130	202	V
			* 11.92204	42.84	ADR	38.8	-42.3	0	39.34	54	-14.66	-	-	130	202	V
	6345	6 + 5	* 2.225818	61.13	PK-U	31.8	-50.35	0	42.58	-	-	74	-31.42	39	355	H
			* 2.211464	49.42	ADR	31.8	-50.32	0.09	30.99	54	-23.01	-	-	39	355	H
			3.588114	57.64	PK-U	33.7	-47.65	0	43.69	-	-	88.2	-44.51	84	393	H
			3.594904	46.24	ADR	33.8	-47.69	0.09	32.44	68.2	-35.76	-	-	84	393	H
			* 2.234657	61.02	PK-U	31.7	-50.37	0	42.35	-	-	74	-31.65	356	316	V
			* 2.215677	49.37	ADR	31.8	-50.29	0.09	30.97	54	-23.03	-	-	356	316	V
			* 3.626094	57.76	PK-U	33.5	-47.71	0	43.55	-	-	74	-30.45	205	191	V
			3.598426	46.29	ADR	33.8	-47.68	0.09	32.5	68.2	-35.7	-	-	205	191	V
			12.821618	53.14	PK-U	39.1	-43.22	0	49.02	-	-	88.2	-39.18	247	390	H
			12.803612	41.63	ADR	39.1	-43.18	0.09	37.64	68.2	-30.56	-	-	247	390	H
			12.802131	53.5	PK-U	39.1	-43.12	0	49.48	-	-	88.2	-38.72	252	101	V
			12.79246	41.58	ADR	39.1	-42.85	0.09	37.92	68.2	-30.28	-	-	252	101	V
	6185 (26T)	6 + 5	* 2.214152	49.42	ADR	31.8	-50.31	0.09	31	54	-23	-	-	293	125	H
			* 2.223888	61.04	PK-U	31.8	-50.37	0	42.47	-	-	74	-31.53	293	125	H
			3.583676	58.08	PK-U	33.7	-47.68	0	44.1	-	-	88.2	-44.1	35	289	H
			3.596675	46.29	ADR	33.8	-47.67	0.09	32.51	68.2	-35.69	-	-	35	289	H
			* 2.215966	49.42	ADR	31.8	-50.29	0.09	31.02	54	-22.98	-	-	156	246	V
			* 2.226076	61.18	PK-U	31.8	-50.35	0	42.63	-	-	74	-31.37	156	246	V
			3.587012	57.76	PK-U	33.7	-47.66	0	43.8	-	-	88.2	-44.4	271	237	V
			3.597762	46.52	ADR	33.8	-47.69	0.09	32.72	68.2	-35.48	-	-	271	237	V
			14.085987	56.1	PK-U	39.2	-43.96	0	51.34	-	-	88.2	-36.86	35	266	H
			14.068008	44.18	ADR	39.1	-43.95	0.09	39.42	68.2	-28.78	-	-	35	266	H
			14.064905	55.61	PK-U	39.1	-43.92	0	50.79	-	-	88.2	-37.41	258	202	V
			14.072784	44.08	ADR	39.1	-43.97	0.09	39.3	68.2	-28.9	-	-	258	202	V
	6345 (26T)	6 + 5	2.452434	60.65	PK-U	32.4	-50.18	0	42.87	-	-	88.2	-45.33	228	388	H
			2.44451	49.17	ADR	32.4	-50.14	0.09	31.52	68.2	-36.68	-	-	228	388	H
			* 3.89999	57.94	PK-U	33.5	-47.83	0	43.61	-	-	74	-30.39	314	265	H
			* 3.879219	46.36	ADR	33.5	-47.84	0.09	32.11	54	-21.89	-	-	314	265	H
			2.457157	61.9	PK-U	32.4	-50.21	0	44.09	-	-	88.2	-44.11	175	196	V
			2.445483	49.07	ADR	32.4	-50.16	0.09	31.4	68.2	-36.8	-	-	175	196	V
			* 3.869684	57.76	PK-U	33.5	-47.81	0	43.45	-	-	74	-30.55	54	230	V
			* 3.875954	46.05	ADR	33.5	-47.82	0.09	31.82	54	-22.18	-	-	54	230	V
			13.854369	54.58	PK-U	39	-44	0	49.58	-	-	88.2	-38.62	200	189	H
			13.855117	42.48	ADR	39	-43.99	0.09	37.58	68.2	-30.62	-	-	200	189	H
			13.860149	54.38	PK-U	39.1	-44.08	0	49.4	-	-	88.2	-38.8	223	214	V
			13.853973	42.72	ADR	39	-44.01	0.09	37.8	68.2	-30.4	-	-	223	214	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6025MHz)

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.325125	60.16	PK-U	29.3	0	-47.8	41.66	-	-	74	-32.34	341	170	H
* 1.323251	48.42	ADR	29.3	0	-47.8	29.92	54	-24.08	-	-	341	170	H
* 4.021934	55.94	PK-U	33.4	0	-46	43.34	-	-	74	-30.66	12	305	H
* 4.022626	43.94	ADR	33.4	0	-45.94	31.4	54	-22.6	-	-	12	305	H
* 1.327024	59.93	PK-U	29.3	0	-47.8	41.43	-	-	74	-32.57	140	111	V
* 1.325759	48.57	ADR	29.3	0	-47.8	30.07	54	-23.93	-	-	140	111	V
* 4.021685	55.86	PK-U	33.4	0	-46	43.26	-	-	74	-30.74	209	244	V
* 4.021394	44.01	ADR	33.4	0	-46	31.41	54	-22.59	-	-	209	244	V
* 11.920662	54.44	PK-U	38.8	0	-42.3	50.94	-	-	74	-23.06	164	172	H
* 11.920179	42.84	ADR	38.8	0	-42.3	39.34	54	-14.66	-	-	164	172	H
* 11.928488	55.22	PK-U	38.8	0	-42.6	51.42	-	-	74	-22.58	188	314	V
* 11.927314	43.12	ADR	38.8	0	-42.6	39.32	54	-14.68	-	-	188	314	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.6. 802.11be MIMO MODE IN UNII-6 BAND – SPURIOUS EMISSIONS

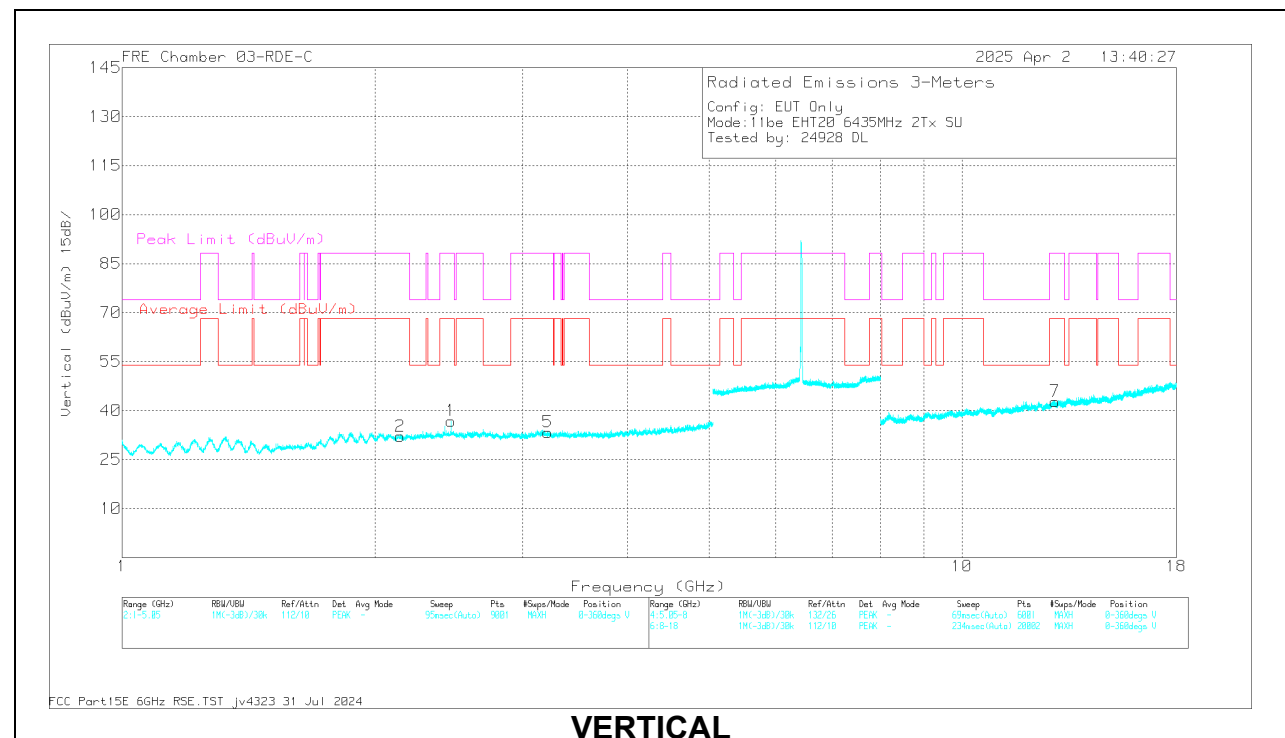
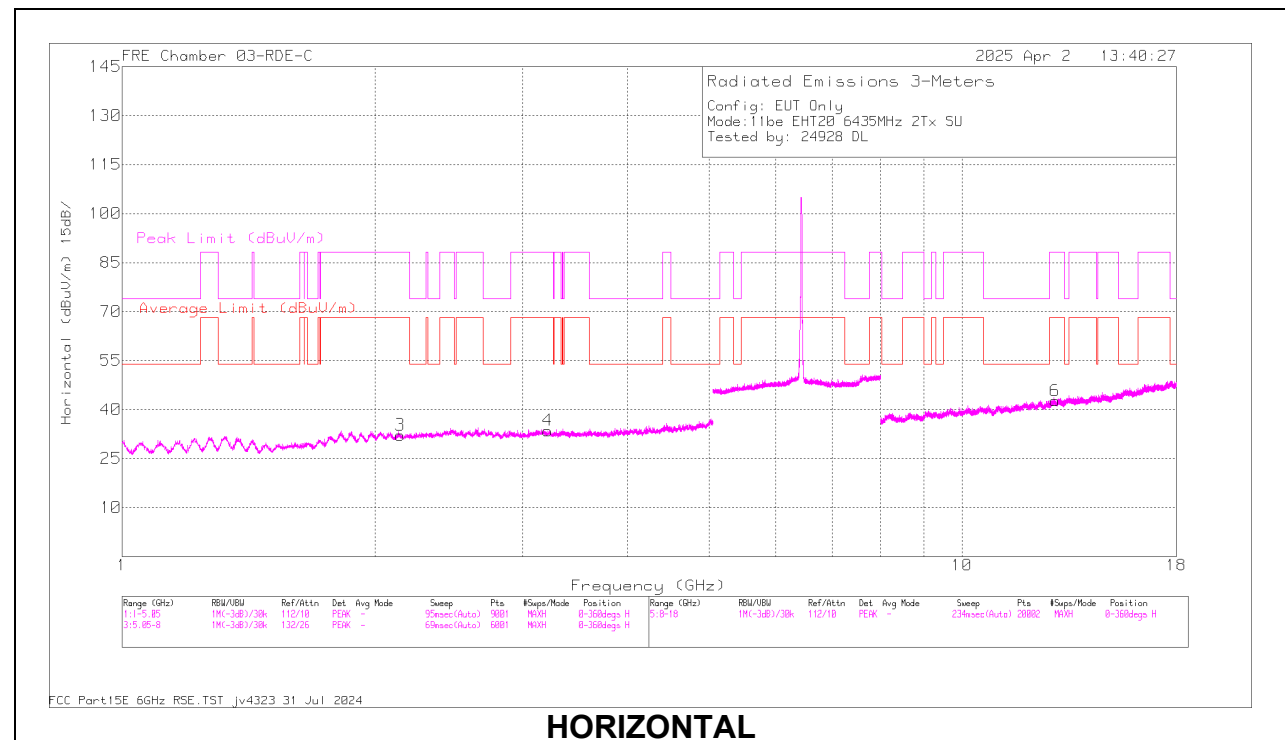
20MHz

UNII-6 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbi/ Fltr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6435	6 + 5	2.14127	47.77	ADR	31.3	-48	0	31.07	68.2	-37.13	-	-	305	291	H
			2.14158	47.59	ADR	31.3	-48	0	30.89	68.2	-37.31	-	-	29	244	V
			2.141928	59.6	PK-U	31.3	-48	0	42.9	-	-	88.2	-45.3	305	291	H
			2.143761	59.16	PK-U	31.3	-48.1	0	42.36	-	-	88.2	-45.84	29	244	V
			3.212558	44.68	ADR	33.1	-46	0	31.78	68.2	-36.42	-	-	130	189	V
			3.213779	56.17	PK-U	33.1	-46	0	43.27	-	-	88.2	-44.93	130	189	V
			3.214101	56.36	PK-U	33.1	-46	0	43.46	-	-	88.2	-44.74	191	301	H
			3.214865	44.77	ADR	33.1	-46	0	31.87	68.2	-36.33	-	-	191	301	H
			12.901773	57.25	PK-U	39.3	-44.68	0	51.87	-	-	88.2	-36.33	163	152	V
			12.904158	45.63	ADR	39.3	-44.6	0	40.33	68.2	-27.87	-	-	163	152	V
			12.906848	45.52	ADR	39.3	-44.7	0	40.12	68.2	-28.08	-	-	202	265	H
			12.909636	57.7	PK-U	39.3	-44.7	0	52.3	-	-	88.2	-35.9	202	265	H
	6475	6 + 5	2.167275	59.13	PK-U	31.3	-48.1	0	42.33	-	-	88.2	-45.87	194	277	V
			2.1696	47.13	ADR	31.3	-48.1	0	30.33	68.2	-37.87	-	-	194	277	V
			2.170239	47.37	ADR	31.3	-48.1	0	30.57	68.2	-37.63	-	-	44	223	H
			2.172194	58.75	PK-U	31.3	-48.12	0	41.93	-	-	88.2	-46.27	44	223	H
			3.233179	56.02	PK-U	33	-45.9	0	43.12	-	-	88.2	-45.08	26	180	V
			3.236678	56.12	PK-U	33	-45.9	0	43.22	-	-	88.2	-44.98	106	188	H
			3.236718	44.58	ADR	33	-45.9	0	31.68	68.2	-36.52	-	-	26	180	V
			3.237105	44.5	ADR	33	-45.9	0	31.6	68.2	-36.6	-	-	106	188	H
			12.945445	57.48	PK-U	39.3	-44.74	0	52.04	-	-	88.2	-36.16	247	214	V
			12.949145	45.91	ADR	39.3	-44.71	0	40.5	68.2	-27.7	-	-	247	214	V
			12.949468	45.79	ADR	39.3	-44.75	0	40.34	68.2	-27.86	-	-	266	243	H
			12.949764	57.63	PK-U	39.3	-44.78	0	52.15	-	-	88.2	-36.05	266	243	H
	6515	6 + 5	2.16932	59.17	PK-U	31.3	-48.1	0	42.37	-	-	88.2	-45.83	170	229	V
			2.170772	47.16	ADR	31.3	-48.1	0	30.36	68.2	-37.84	-	-	170	229	V
			2.172075	47.34	ADR	31.3	-48.11	0	30.53	68.2	-37.67	-	-	342	166	H
			2.17276	59.11	PK-U	31.3	-48.18	0	42.23	-	-	88.2	-45.97	342	166	H
			3.254427	55.76	PK-U	33	-46	0	42.76	-	-	88.2	-45.44	256	186	H
			3.256225	44.21	ADR	33	-46	0	31.21	68.2	-36.99	-	-	256	186	H
			3.257246	56.44	PK-U	33	-45.98	0	43.46	-	-	88.2	-44.74	120	194	V
			3.25787	44.26	ADR	33	-45.91	0	31.35	68.2	-36.85	-	-	120	194	V
			13.03094	58.33	PK-U	39.3	-44.91	0	52.72	-	-	88.2	-35.48	184	277	H
			13.03108	46.66	ADR	39.3	-44.91	0	41.05	68.2	-27.15	-	-	184	277	H
			13.031328	58.26	PK-U	39.3	-44.93	0	52.63	-	-	88.2	-35.57	360	232	V
			13.033304	46.5	ADR	39.3	-44.9	0	40.9	68.2	-27.3	-	-	360	232	V
	6435 (52T)	6 + 5	2.149009	60.83	PK-U	31.6	-50.5	0	41.93	-	-	88.2	-46.27	47	172	V
			2.149047	61.32	PK-U	31.6	-50.5	0	42.42	-	-	88.2	-45.78	52	263	H
			2.149391	49.3	ADR	31.6	-50.5	0	30.4	68.2	-37.8	-	-	47	172	V
			2.150765	49.28	ADR	31.7	-50.49	0	30.49	68.2	-37.71	-	-	52	263	H
			3.20845	58.61	PK-U	33.3	-48.41	0	43.5	-	-	88.2	-44.7	165	204	V
			3.208761	47.45	ADR	33.3	-48.4	0	32.35	68.2	-35.85	-	-	165	204	V
			3.208861	58.94	PK-U	33.3	-48.4	0	43.84	-	-	88.2	-44.36	178	235	H
			3.208935	47.36	ADR	33.3	-48.4	0	32.26	68.2	-35.94	-	-	178	235	H
			12.874826	43.22	ADR	39.3	-44.55	0	37.97	68.2	-30.23	-	-	262	214	V
			12.876979	43.56	ADR	39.3	-44.51	0	38.35	68.2	-29.85	-	-	106	355	H
			12.877281	55.49	PK-U	39.3	-44.51	0	50.28	-	-	88.2	-37.92	262	214	V
			12.879652	55.27	PK-U	39.3	-44.43	0	50.14	-	-	88.2	-38.06	106	355	H
		6475 (52T)	2.148841	61.16	PK-U	31.6	-50.5	0	42.26	-	-	88.2	-45.94	220	173	H
			2.149378	49.53	ADR	31.6	-50.5	0	30.63	68.2	-37.57	-	-	220	173	H
			2.151331	60.65	PK-U	31.7	-50.48	0	41.87	-	-	88.2	-46.33	17	360	V
			2.151642	49.44	ADR	31.7	-50.48	0	30.66	68.2	-37.54	-	-	17	360	V
			3.22538	47.13	ADR	33.3	-48.14	0	32.29	68.2	-35.91	-	-	299	222	H
			3.227752	58.98	PK-U	33.3	-48.13	0	44.15	-	-	88.2	-44.05	299	222	H
			3.23014	59.14	PK-U	33.2	-48.07	0	44.27	-	-	88.2	-43.93	139	152	V
			3.230393	47.28	ADR	33.2	-48.08	0	32.4	68.2	-35.8	-	-	139	152	V
			12.940879	43.3	ADR	39.2	-44.47	0	38.03	68.2	-30.17	-	-	31	188	V
			12.943378	43.32	ADR	39.2	-44.55	0	37.97	68.2	-30.23	-	-	95	152	H
			12.943515	54.86	PK-U	39.2	-44.55	0	49.51	-	-	88.2	-38.69	31	188	V
			12.944612	54.66	PK-U	39.2	-44.58	0	49.28	-	-	88.2	-38.92	95	152	H
	6515 (52T)	6 + 5	2.174303	49.14	ADR	31.8	-50.33	0	30.61	68.2	-37.59	-	-	102	159	V
			2.175944	60.85	PK-U	31.8	-50.37	0	42.28	-	-	88.2	-45.92	102	159	V
			2.176303	60.86	PK-U	31.8	-50.35	0	42.31	-	-	88.2	-45.89	308	200	H
			2.177831	49	ADR	31.8	-50.34	0	30.46	68.2	-37.74	-	-	308	200	H
			3.248089	47.31	ADR	33.2	-47.95	0	32.56	68.2	-35.64	-	-	360	105	H
			3.249591	47.31	ADR	33.2	-47.9	0	32.61	68.2	-35.59	-	-	176	223	V
			3.251103	59.15	PK-U	33.2	-47.97	0	44.38	-	-	88.2	-43.82	360	105	H
			3.252371	59.16	PK-U	33.2	-47.92	0	44.44	-	-	88.2	-43.76	176	223	V
			13.034546	44.25	ADR	39.2	-44.76	0	38.69	68.2	-29.51	-	-	23	336	V
			13.034591	44.31	ADR	39.2	-44.76	0	38.75	68.2	-29.45	-	-	286	177	H
			13.034632	55.53	PK-U	39.2	-44.76	0	49.97	-	-	88.2	-38.23	23	336	V
			13.035049	56.08	PK-U	39.2	-44.75	0	50.53	-	-	88.2	-37.67	286	177	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6435MHz)

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2.14127	47.77	ADR	31.3	0	-48	31.07	68.2	-37.13	-	-	305	291	H
2.14158	47.59	ADR	31.3	0	-48	30.89	68.2	-37.31	-	-	29	244	V
2.141928	59.6	PK-U	31.3	0	-48	42.9	-	-	88.2	-45.3	305	291	H
2.143761	59.16	PK-U	31.3	0	-48.1	42.36	-	-	88.2	-45.84	29	244	V
3.212558	44.68	ADR	33.1	0	-46	31.78	68.2	-36.42	-	-	130	189	V
3.213779	56.17	PK-U	33.1	0	-46	43.27	-	-	88.2	-44.93	130	189	V
3.214101	56.36	PK-U	33.1	0	-46	43.46	-	-	88.2	-44.74	191	301	H
3.214865	44.77	ADR	33.1	0	-46	31.87	68.2	-36.33	-	-	191	301	H
12.901773	57.25	PK-U	39.3	0	-44.68	51.87	-	-	88.2	-36.33	163	152	V
12.904158	45.63	ADR	39.3	0	-44.6	40.33	68.2	-27.87	-	-	163	152	V
12.906848	45.52	ADR	39.3	0	-44.7	40.12	68.2	-28.08	-	-	202	265	H
12.909636	57.7	PK-U	39.3	0	-44.7	52.3	-	-	88.2	-35.9	202	265	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

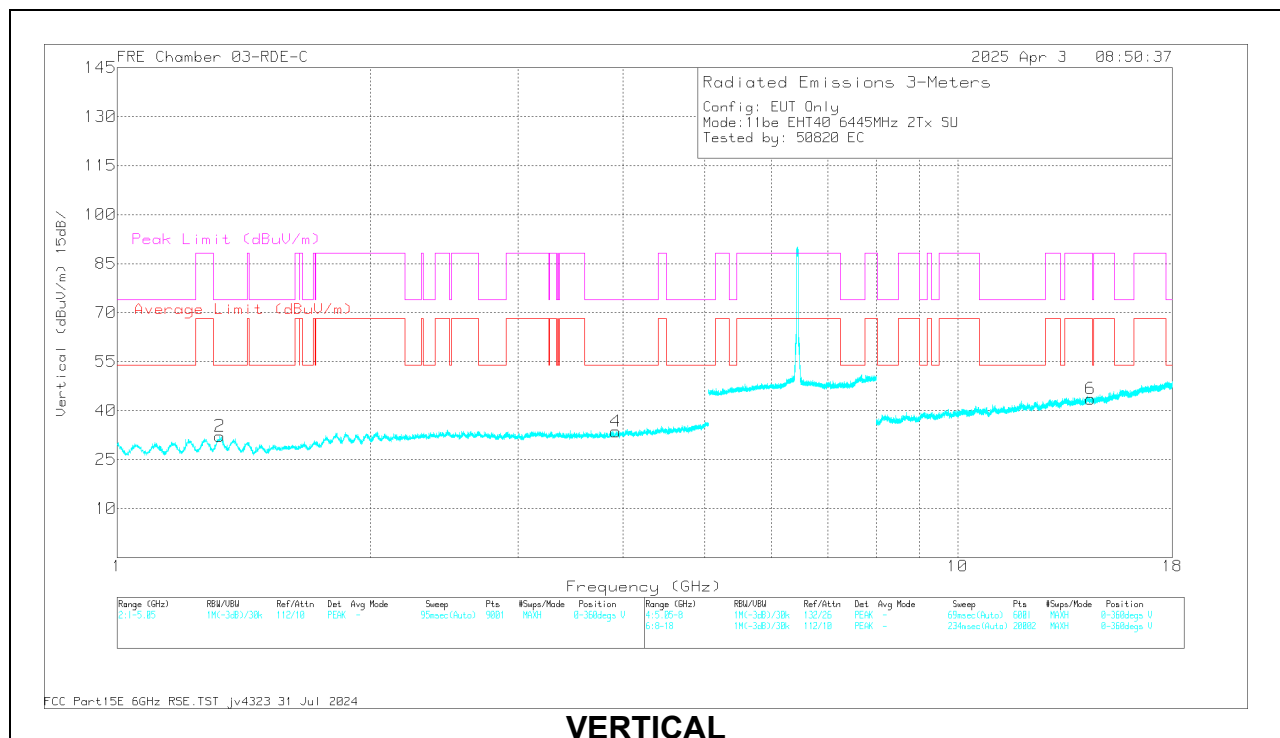
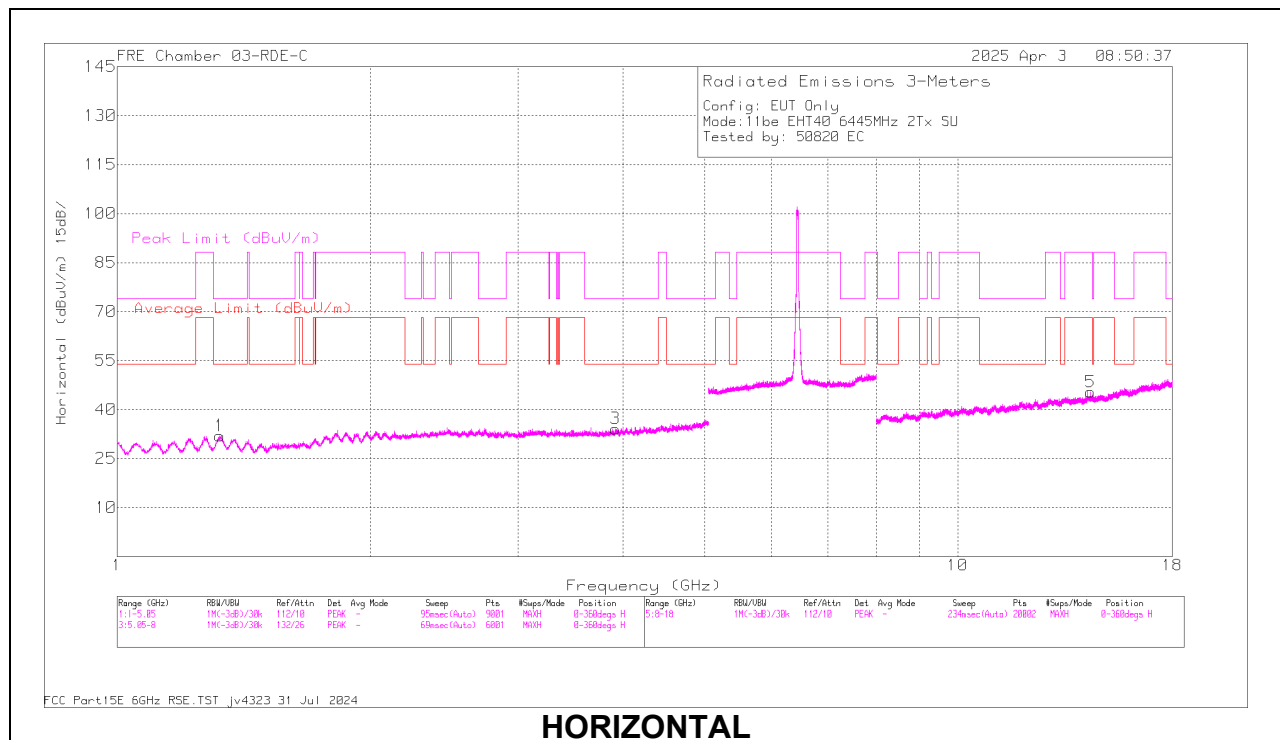
40MHz

UNII-6 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cb/ Fltr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6445	6 + 5	* 1.320153	60.7	PK-U	29.3	-47.8	0	42.2	-	-	74	-31.8	113	203	H
			* 1.323385	48.63	ADR	29.3	-47.8	0	30.13	54	-23.87	-	-	113	203	H
			* 3.922097	56.23	PK-U	33.3	-45.8	0	43.73	-	-	74	-30.27	139	145	H
			* 3.919634	44.34	ADR	33.3	-45.8	0	31.84	54	-22.16	-	-	139	145	H
			* 1.32517	60.36	PK-U	29.3	-47.8	0	41.86	-	-	74	-32.14	123	134	V
			* 1.322903	48.75	ADR	29.3	-47.8	0	30.25	54	-23.75	-	-	123	134	V
			* 3.918347	55.68	PK-U	33.3	-45.8	0	43.18	-	-	74	-30.82	71	308	V
			* 3.921671	44.34	ADR	33.3	-45.8	0	31.84	54	-22.16	-	-	71	308	V
			14.379952	56.83	PK-U	39.6	-43.6	0	52.83	-	-	88.2	-35.37	98	319	H
			14.382181	45.16	ADR	39.6	-43.6	0	41.16	68.2	-27.04	-	-	98	319	H
			14.389707	45.31	ADR	39.6	-43.6	0	41.31	68.2	-26.89	-	-	29	353	V
			14.390932	57.09	PK-U	39.6	-43.6	0	53.09	-	-	88.2	-35.11	29	353	V
	6485	6 + 5	* 1.31994	60.03	PK-U	29.3	-47.8	0	41.53	-	-	74	-32.47	234	157	H
			* 1.321334	48.43	ADR	29.3	-47.8	0	29.93	54	-24.07	-	-	234	157	H
			* 4.140036	56.7	PK-U	33.4	-46.2	0	43.9	-	-	74	-30.1	355	165	H
			* 4.139408	44.7	ADR	33.4	-46.2	0	31.9	54	-22.1	-	-	355	165	H
			* 1.322675	60.35	PK-U	29.3	-47.8	0	41.85	-	-	74	-32.15	166	382	V
			* 1.323975	48.71	ADR	29.3	-47.8	0	30.21	54	-23.79	-	-	166	382	V
			* 4.142272	56.81	PK-U	33.4	-46.2	0	44.01	-	-	74	-29.99	195	101	V
			* 4.142035	44.72	ADR	33.4	-46.2	0	31.92	54	-22.08	-	-	195	101	V
			* 11.853875	55.23	PK-U	38.7	-42.29	0	51.64	-	-	74	-22.36	72	328	H
			* 11.853789	43.27	ADR	38.7	-42.28	0	39.69	54	-14.31	-	-	72	328	H
			* 11.848912	55.26	PK-U	38.7	-42.21	0	51.75	-	-	74	-22.25	290	120	V
			* 11.851888	43.38	ADR	38.7	-42.2	0	39.88	54	-14.12	-	-	290	120	V
	6525 (Straddle)	6 + 5	* 1.327328	60.02	PK-U	29.3	-47.8	0	41.52	-	-	74	-32.48	124	125	H
			* 1.327288	48.59	ADR	29.3	-47.8	0	30.09	54	-23.91	-	-	124	125	H
			* 3.982847	55.74	PK-U	33.4	-45.9	0	43.24	-	-	74	-30.76	341	109	H
			* 3.982016	44.16	ADR	33.4	-45.9	0	31.66	54	-22.34	-	-	341	109	H
			* 1.324553	60.76	PK-U	29.3	-47.8	0	42.26	-	-	74	-31.74	88	398	V
			* 1.323713	48.78	ADR	29.3	-47.8	0	30.28	54	-23.72	-	-	88	398	V
			* 3.982681	55.69	PK-U	33.4	-45.9	0	43.19	-	-	74	-30.81	116	323	V
			* 3.981286	44.2	ADR	33.4	-45.83	0	31.77	54	-22.23	-	-	116	323	V
			* 11.850021	55.05	PK-U	38.7	-42.2	0	51.55	-	-	74	-22.45	205	119	H
			* 11.851124	43.31	ADR	38.7	-42.2	0	39.81	54	-14.19	-	-	205	119	H
			* 11.84521	54.83	PK-U	38.7	-42.38	0	51.15	-	-	74	-22.85	357	104	V
			* 11.847176	43.49	ADR	38.7	-42.3	0	39.89	54	-14.11	-	-	357	104	V
	6445 (106+26T)	6 + 5	2.455298	61.36	PK-U	32.4	-50.2	0	43.56	-	-	88.2	-44.64	144	304	H
			2.450752	49.11	ADR	32.4	-50.19	0	31.32	68.2	-36.88	-	-	144	304	H
			* 3.923719	58.13	PK-U	33.4	-47.78	0	43.75	-	-	74	-30.25	324	247	H
			* 3.905929	46.33	ADR	33.5	-47.78	0	32.05	54	-21.95	-	-	324	247	H
			2.454515	61.29	PK-U	32.4	-50.2	0	43.49	-	-	88.2	-44.71	139	336	V
			2.457768	49.12	ADR	32.4	-50.2	0	31.32	68.2	-36.88	-	-	139	336	V
			* 3.903387	58.16	PK-U	33.5	-47.82	0	43.84	-	-	74	-30.16	262	135	V
			* 3.913262	46.21	ADR	33.5	-47.85	0	31.86	54	-22.14	-	-	262	135	V
			14.057815	56.1	PK-U	39.1	-43.83	0	51.37	-	-	88.2	-36.83	43	299	H
			14.076853	44.23	ADR	39.1	-43.98	0	39.35	68.2	-28.85	-	-	43	299	H
			14.038871	55.72	PK-U	39.1	-43.37	0	51.45	-	-	88.2	-36.75	344	275	V
			14.070288	44.22	ADR	39.1	-44.05	0	39.27	68.2	-28.93	-	-	344	275	V
	6485 (106+26T)	6 + 5	2.546126	60.83	PK-U	32.4	-49.71	0	43.52	-	-	88.2	-44.68	70	310	H
			2.54662	49.09	ADR	32.4	-49.7	0	31.79	68.2	-36.41	-	-	70	310	H
			* 3.81679	57.23	PK-U	33.4	-47.69	0	42.94	-	-	74	-31.06	48	255	H
			* 3.823692	45.88	ADR	33.4	-47.63	0	31.65	54	-22.35	-	-	48	255	H
			2.549502	60.73	PK-U	32.4	-49.69	0	43.44	-	-	88.2	-44.76	124	369	V
			2.550484	49.08	ADR	32.4	-49.69	0	31.79	68.2	-36.41	-	-	124	369	V
			* 3.849363	57.45	PK-U	33.4	-47.67	0	43.18	-	-	74	-30.82	245	385	V
			* 3.819868	45.93	ADR	33.4	-47.65	0	31.68	54	-22.32	-	-	245	385	V
			* 14.487975	55.38	PK-U	39.2	-43.48	0	51.1	-	-	74	-22.9	235	273	H
			* 14.485631	43.71	ADR	39.2	-43.59	0	39.32	54	-14.68	-	-	235	273	H
			* 14.483874	55.24	PK-U	39.2	-43.63	0	50.81	-	-	74	-23.19	27	313	V
			* 14.474475	43.65	ADR	39.2	-43.8	0	39.05	54	-14.95	-	-	27	313	V
	6525 (106+26T)	6 + 5	2.564026	61.03	PK-U	32.4	-49.67	0	43.76	-	-	88.2	-44.44	311	106	H
			2.550734	49.09	ADR	32.4	-49.69	0	31.8	68.2	-36.4	-	-	311	106	H
			* 4.279122	57.75	PK-U	33.9	-47.77	0	43.88	-	-	74	-30.12	115	245	H
			* 4.282468	46.2	ADR	33.9	-47.88	0	32.22	54	-21.78	-	-	115	245	H
			2.556017	61.16	PK-U	32.4	-49.7	0	43.86	-	-	88.2	-44.34	240	228	V
			2.557612	49.09	ADR	32.4	-49.67	0	31.82	68.2	-36.38	-	-	240	228	V
			* 4.285044	58.59	PK-U	33.9	-47.88	0	44.61	-	-	74	-29.39	138	204	V
			* 4.28552	46.35	ADR	33.9	-47.86	0	32.39	54	-21.61	-	-	138	204	V
			14.704521	54.3	PK-U	39.4	-43.63	0	50.07	-	-	88.2	-38.13	188	286	H
			14.703533	42.74	ADR	39.4	-43.62	0	38.52	68.2	-29.68	-	-	188	286	H
			14.743379	54.52	PK-U	39.5	-43.46	0	50.56	-	-	88.2	-37.64	333	295	V
			14.741591	42.77	ADR	39.5	-43.43	0	38.84	68.2	-29.36	-	-	333	295	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6445MHz)

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.320153	60.7	PK-U	29.3	0	-47.8	42.2	-	-	74	-31.8	113	203	H
* 1.323385	48.63	ADR	29.3	0	-47.8	30.13	54	-23.87	-	-	113	203	H
* 3.922097	56.23	PK-U	33.3	0	-45.8	43.73	-	-	74	-30.27	139	145	H
* 3.919634	44.34	ADR	33.3	0	-45.8	31.84	54	-22.16	-	-	139	145	H
* 1.32517	60.36	PK-U	29.3	0	-47.8	41.86	-	-	74	-32.14	123	134	V
* 1.322903	48.75	ADR	29.3	0	-47.8	30.25	54	-23.75	-	-	123	134	V
* 3.918347	55.68	PK-U	33.3	0	-45.8	43.18	-	-	74	-30.82	71	308	V
* 3.921671	44.34	ADR	33.3	0	-45.8	31.84	54	-22.16	-	-	71	308	V
14.379952	56.83	PK-U	39.6	0	-43.6	52.83	-	-	88.2	-35.37	98	319	H
14.382181	45.16	ADR	39.6	0	-43.6	41.16	68.2	-27.04	-	-	98	319	H
14.389707	45.31	ADR	39.6	0	-43.6	41.31	68.2	-26.89	-	-	29	353	V
14.390932	57.09	PK-U	39.6	0	-43.6	53.09	-	-	88.2	-35.11	29	353	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

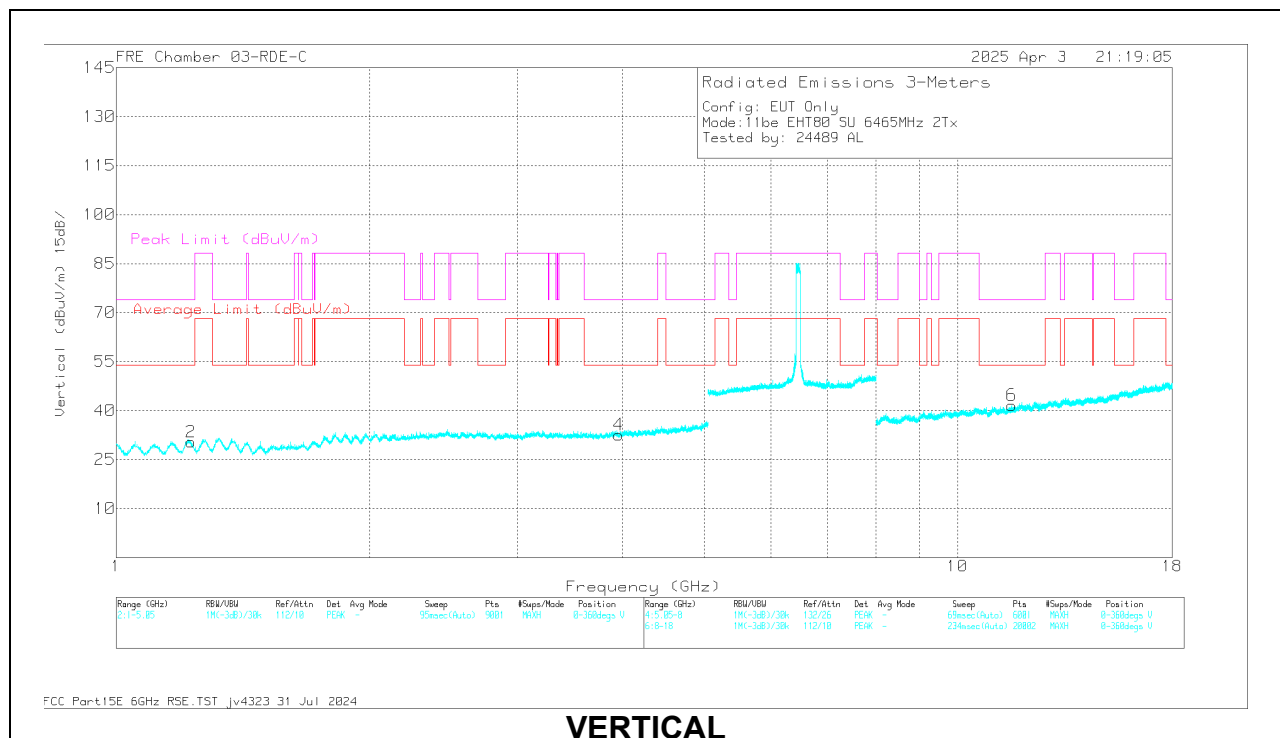
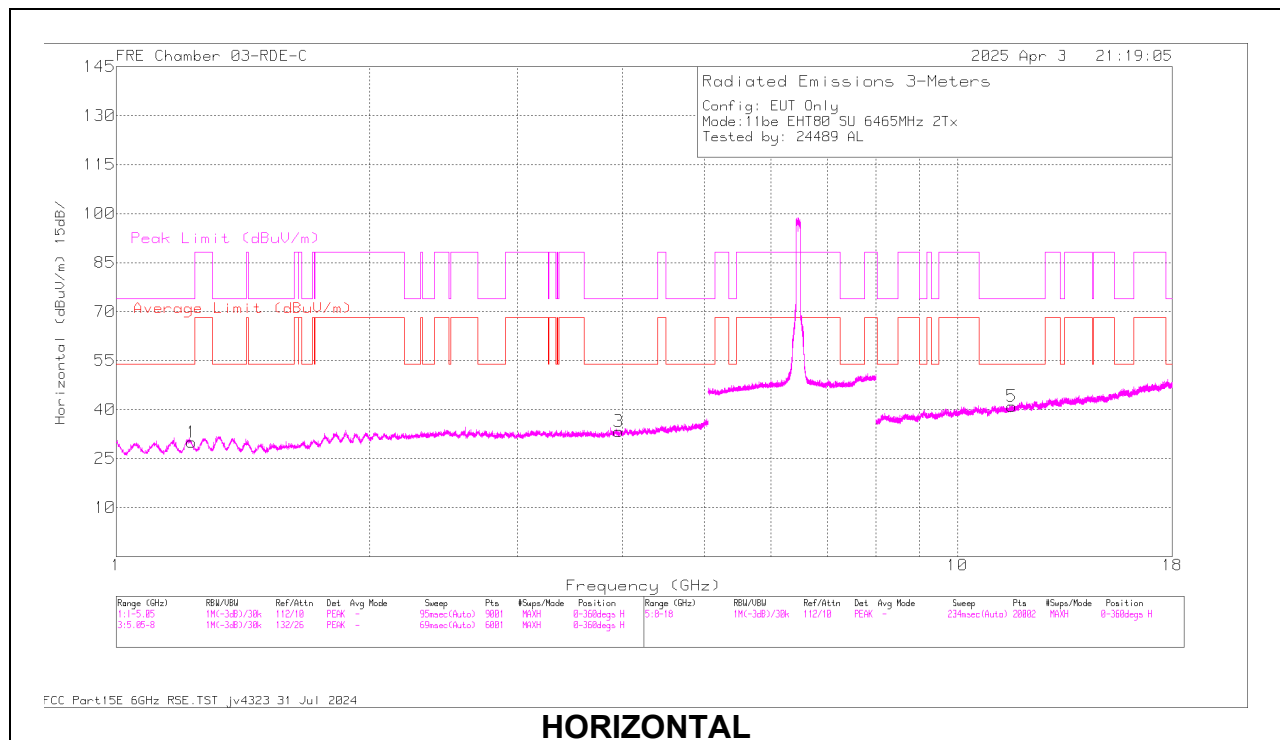
80MHz

UNII-6 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6465	6 + 5	* 1.226945	60.69	PK-U	29	-48	0	41.69	-	-	74	-32.31	1	101	H
			* 1.226655	47.78	ADR	29	-48	0	28.78	54	-25.22	-	-	1	101	H
			* 3.954094	55.49	PK-U	33.4	-45.71	0	43.18	-	-	74	-30.82	1	101	H
			* 3.954318	43.58	ADR	33.4	-45.73	0	31.25	54	-22.75	-	-	1	101	H
			* 1.225026	59.76	PK-U	29	-47.9	0	40.86	-	-	74	-33.14	1	199	V
			* 1.224923	47.84	ADR	29	-47.91	0	28.93	54	-25.07	-	-	1	199	V
			* 3.957101	55.12	PK-U	33.4	-45.8	0	42.72	-	-	74	-31.28	1	199	V
			* 3.959142	43.51	ADR	33.4	-45.8	0	31.11	54	-22.89	-	-	1	199	V
			* 11.602443	56.24	PK-U	38.4	-43	0	51.64	-	-	74	-22.36	1	101	H
			* 11.604239	44.08	ADR	38.4	-43	0	39.48	54	-14.52	-	-	1	101	H
			* 11.601781	55.7	PK-U	38.4	-43	0	51.1	-	-	74	-22.9	1	101	V
			* 11.602487	44.06	ADR	38.4	-43	0	39.46	54	-14.54	-	-	1	101	V
11be (Partial RU Mode / Highest PSD)	6465 (106+26T)	6 + 5	2.550674	60.87	PK-U	32.4	-49.69	0	43.58	-	-	88.2	-44.62	128	198	H
			2.553985	49.02	ADR	32.4	-49.71	0	31.71	68.2	-36.49	-	-	128	198	H
			* 4.171856	57.68	PK-U	33.6	-47.71	0	43.57	-	-	74	-30.43	343	143	H
			* 4.173478	46	ADR	33.6	-47.75	0	31.85	54	-22.15	-	-	343	143	H
			2.557415	61.01	PK-U	32.4	-49.68	0	43.73	-	-	88.2	-44.47	7	237	V
			2.560019	49.15	ADR	32.4	-49.66	0	31.89	68.2	-36.31	-	-	7	237	V
			* 4.172695	57.89	PK-U	33.6	-47.73	0	43.76	-	-	74	-30.24	187	318	V
			* 4.139285	46.09	ADR	33.6	-47.65	0	32.04	54	-21.96	-	-	187	318	V
			13.93021	55.59	PK-U	39.1	-44.1	0	50.59	-	-	88.2	-37.61	19	354	H
			13.952084	43.94	ADR	39.1	-43.96	0	39.08	68.2	-29.12	-	-	19	354	H
			13.941512	55.7	PK-U	39.1	-43.98	0	50.82	-	-	88.2	-37.38	15	308	V
			13.950059	44.19	ADR	39.1	-43.98	0	39.31	68.2	-28.89	-	-	15	308	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL / 6465MHz)

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.226945	60.69	PK-U	29	0	-48	41.69	-	-	74	-32.31	1	101	H
1	* 1.226655	47.78	ADR	29	0	-48	28.78	54	-25.22	-	-	1	101	H
3	* 3.954094	55.49	PK-U	33.4	0	-45.71	43.18	-	-	74	-30.82	1	101	H
3	* 3.954318	43.58	ADR	33.4	0	-45.73	31.25	54	-22.75	-	-	1	101	H
2	* 1.225026	59.76	PK-U	29	0	-47.9	40.86	-	-	74	-33.14	1	199	V
2	* 1.224923	47.84	ADR	29	0	-47.91	28.93	54	-25.07	-	-	1	199	V
4	* 3.957101	55.12	PK-U	33.4	0	-45.8	42.72	-	-	74	-31.28	1	199	V
4	* 3.959142	43.51	ADR	33.4	0	-45.8	31.11	54	-22.89	-	-	1	199	V
5	* 11.602443	56.24	PK-U	38.4	0	-43	51.64	-	-	74	-22.36	1	101	H
5	* 11.604239	44.08	ADR	38.4	0	-43	39.48	54	-14.52	-	-	1	101	H
6	* 11.601781	55.7	PK-U	38.4	0	-43	51.1	-	-	74	-22.9	1	101	V
6	* 11.602487	44.06	ADR	38.4	0	-43	39.46	54	-14.54	-	-	1	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

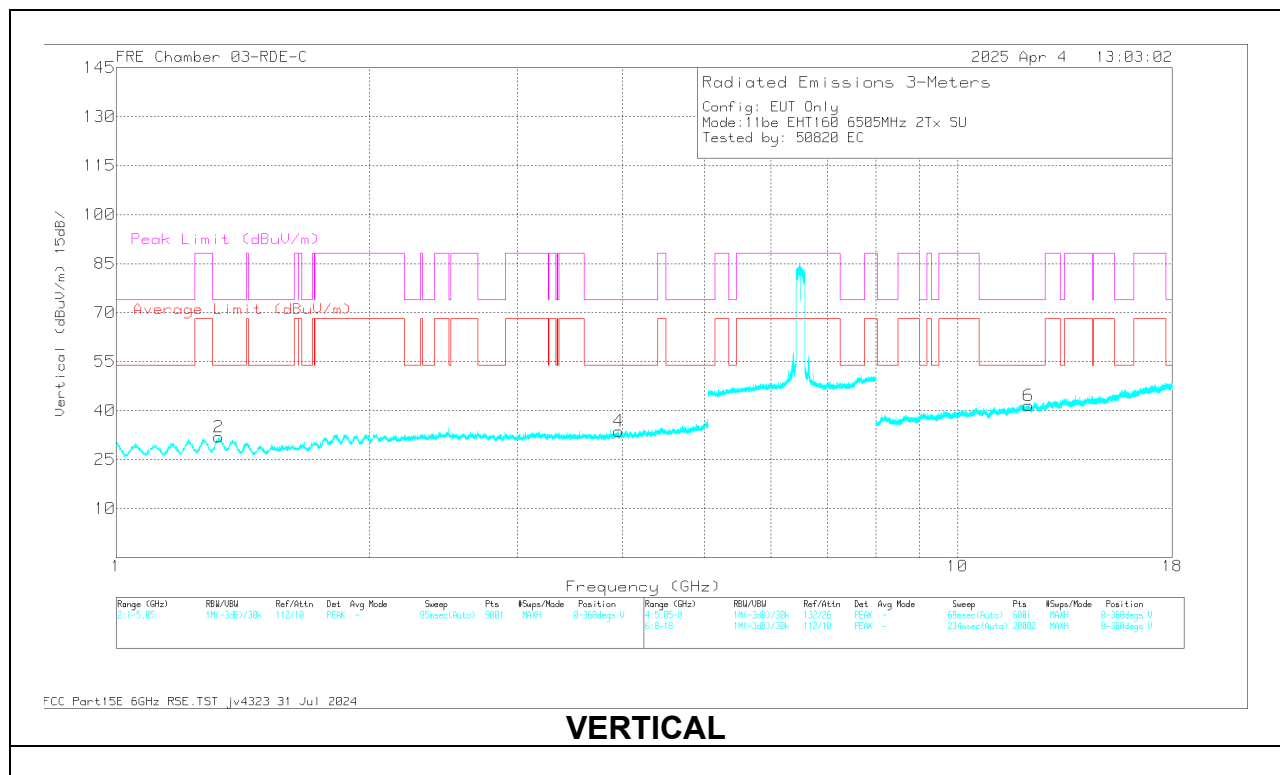
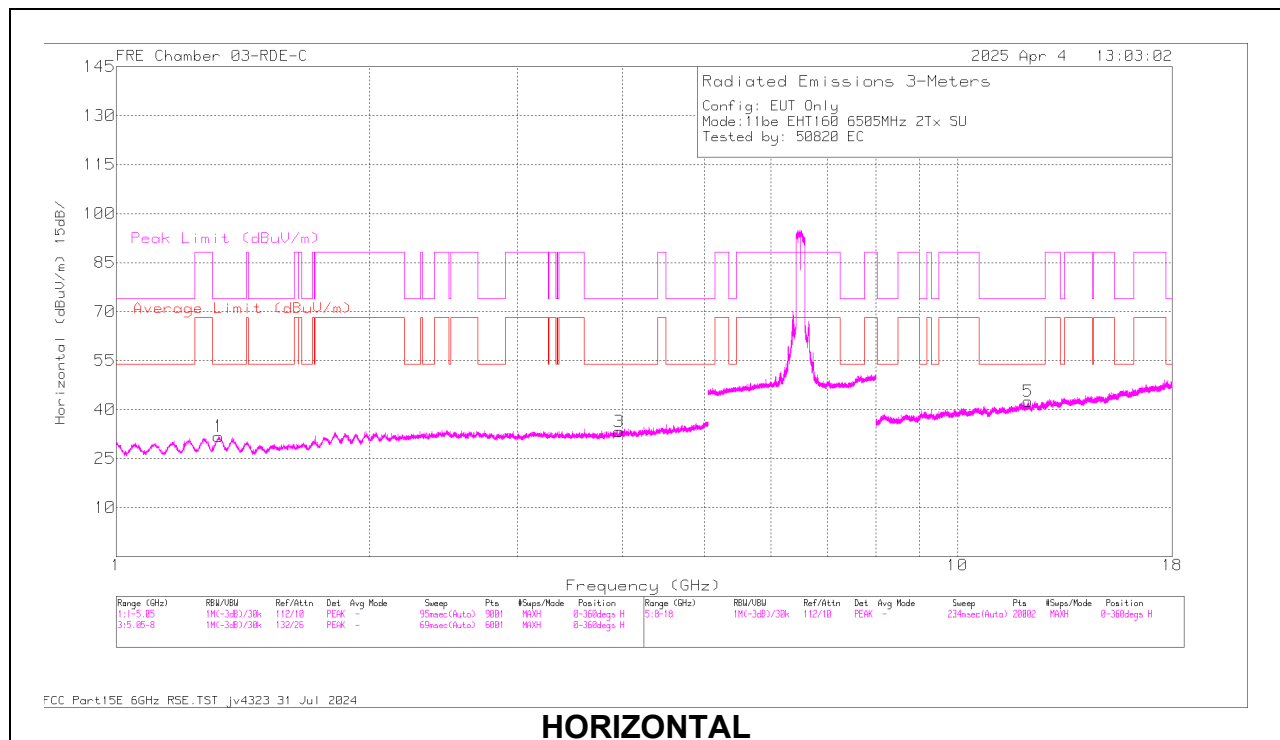
160MHz

UNII-6 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6505 (Straddle)	6 + 5	* 1.322529	60.39	PK-U	29.3	-47.8	0	41.89	-	-	74	-32.11	252	377	H
			* 1.325039	48.47	ADR	29.3	-47.8	0	29.97	54	-24.03	-	-	252	377	H
			* 3.957159	54.68	PK-U	33.4	-45.8	0	42.28	-	-	74	-31.72	55	303	H
			* 3.958696	42.86	ADR	33.4	-45.8	0	30.46	54	-23.54	-	-	55	303	H
			* 1.321036	60.43	PK-U	29.3	-47.8	0	41.93	-	-	74	-32.07	322	304	V
			* 1.32353	48.14	ADR	29.3	-47.8	0	29.64	54	-24.36	-	-	322	304	V
			* 3.955626	54.81	PK-U	33.4	-45.8	0	42.41	-	-	74	-31.59	18	369	V
			* 3.954844	43.3	ADR	33.4	-45.78	0	30.92	54	-23.08	-	-	18	369	V
			* 12.140478	55.39	PK-U	39	-43.3	0	51.09	-	-	74	-22.91	249	321	H
			* 12.137265	43.49	ADR	38.9	-43.33	0	39.06	54	-14.94	-	-	249	321	H
			* 12.145738	55.45	PK-U	39	-43.3	0	51.15	-	-	74	-22.85	64	306	V
			* 12.142639	43.66	ADR	39	-43.36	0	39.3	54	-14.7	-	-	64	306	V
11be (Partial RU Mode / Highest PSD)	6505 (Straddle) (106+26T)	6 + 5	* 1.078189	61.94	PK-U	27.7	-49.6	0	40.04	-	-	74	-33.96	0	101	H
			* 1.079869	50.75	ADR	27.7	-49.6	0	28.85	54	-25.15	-	-	0	101	H
			* 3.991232	57.46	PK-U	33.7	-46.42	0	44.74	-	-	74	-29.26	0	101	H
			* 3.976367	45.6	ADR	33.7	-46.6	0	32.7	54	-21.3	-	-	0	101	H
			* 1.081928	62.68	PK-U	27.7	-49.79	0	40.59	-	-	74	-33.41	0	101	V
			* 1.079973	50.59	ADR	27.7	-49.6	0	28.69	54	-25.31	-	-	0	101	V
			* 3.972351	57.08	PK-U	33.7	-46.46	0	44.32	-	-	74	-29.68	0	101	V
			* 3.992038	45.68	ADR	33.7	-46.5	0	32.88	54	-21.12	-	-	0	101	V
			* 11.796685	53.44	PK-U	39.1	-41.37	0	51.17	-	-	74	-22.83	0	101	H
			* 11.762741	41.74	ADR	39.1	-41.57	0	39.27	54	-14.73	-	-	0	101	H
			* 11.78613	54.7	PK-U	39.1	-41.4	0	52.4	-	-	74	-21.6	0	101	V
			* 11.763788	42.04	ADR	39.1	-41.52	0	39.62	54	-14.38	-	-	0	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL / 6505MHz)

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.322529	60.39	PK-U	29.3	0	-47.8	41.89	-	-	74	-32.11	252	377	H
* 1.325039	48.47	ADR	29.3	0	-47.8	29.97	54	-24.03	-	-	252	377	H
* 3.957159	54.68	PK-U	33.4	0	-45.8	42.28	-	-	74	-31.72	55	303	H
* 3.958696	42.86	ADR	33.4	0	-45.8	30.46	54	-23.54	-	-	55	303	H
* 1.321036	60.43	PK-U	29.3	0	-47.8	41.93	-	-	74	-32.07	322	304	V
* 1.32353	48.14	ADR	29.3	0	-47.8	29.64	54	-24.36	-	-	322	304	V
* 3.955626	54.81	PK-U	33.4	0	-45.8	42.41	-	-	74	-31.59	18	369	V
* 3.954844	43.3	ADR	33.4	0	-45.78	30.92	54	-23.08	-	-	18	369	V
* 12.140478	55.39	PK-U	39	0	-43.3	51.09	-	-	74	-22.91	249	321	H
* 12.137265	43.49	ADR	38.9	0	-43.33	39.06	54	-14.94	-	-	249	321	H
* 12.145738	55.45	PK-U	39	0	-43.3	51.15	-	-	74	-22.85	64	306	V
* 12.142639	43.66	ADR	39	0	-43.36	39.3	54	-14.7	-	-	64	306	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.7. 802.11be MIMO MODE IN UNII-7 BAND – SPURIOUS EMISSIONS

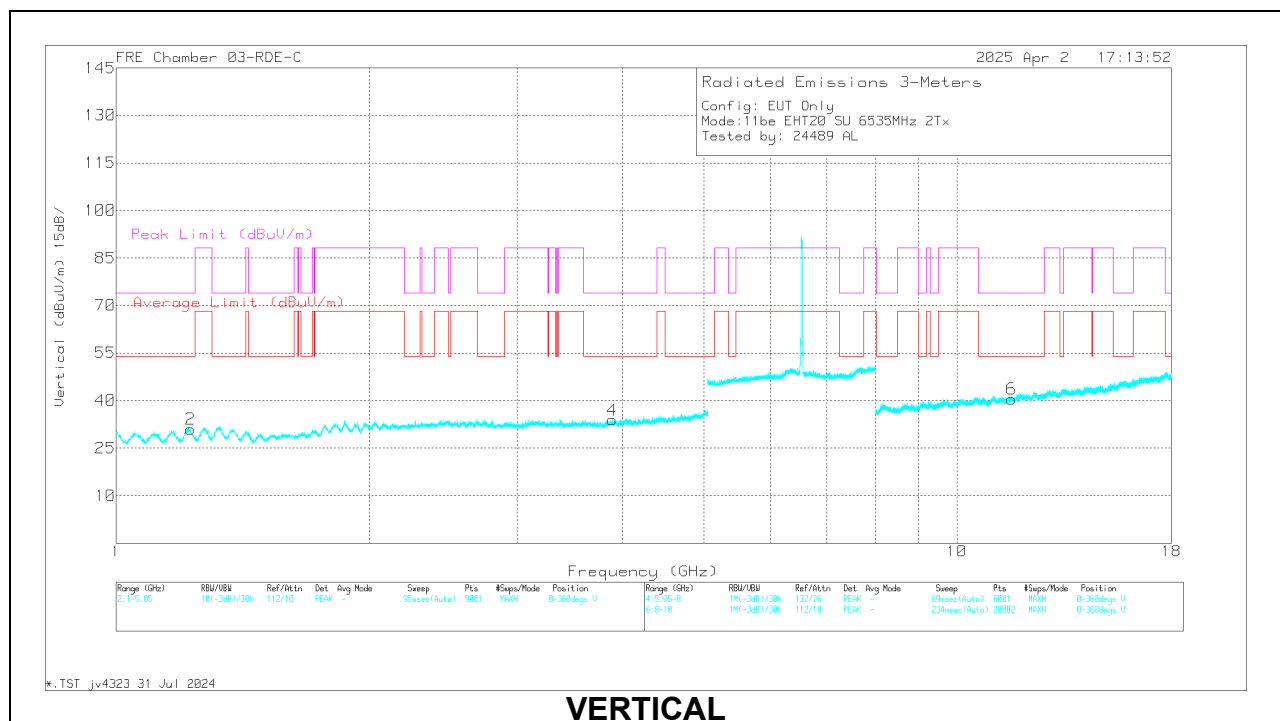
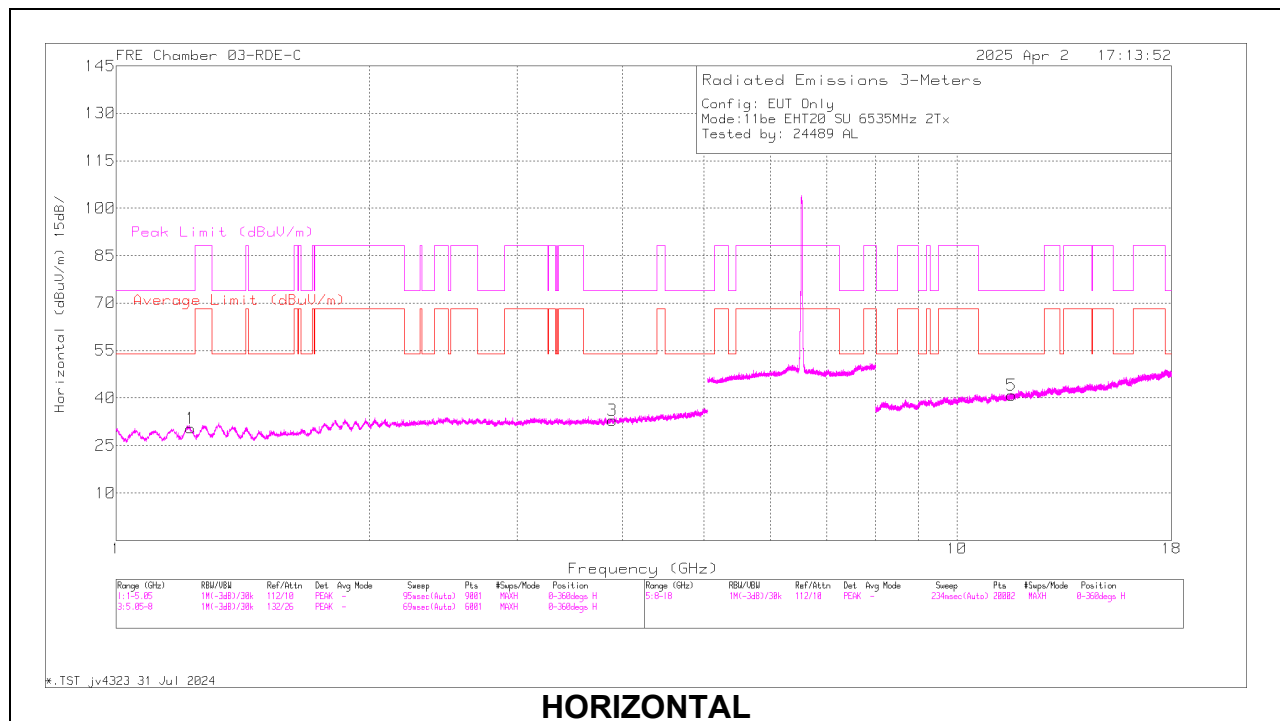
20MHz

UNII-7 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6535	6 + 5	* 1.22691	59.5	PK-U	29	-48	0	40.5	-	-	74	-33.5	0	101	H
			* 1.226051	48.32	ADR	29	-48	0	29.32	54	-24.68	-	-	0	101	H
			* 3.8938	55.91	PK-U	33.2	-45.8	0	43.31	-	-	74	-30.69	0	200	H
			* 3.892369	44.24	ADR	33.2	-45.8	0	31.64	54	-22.36	-	-	0	200	H
			* 1.225156	60.04	PK-U	29	-47.92	0	41.12	-	-	74	-32.88	0	101	V
			* 1.226283	48.06	ADR	29	-48	0	29.06	54	-24.94	-	-	0	101	V
			* 3.891918	55.83	PK-U	33.2	-45.81	0	43.22	-	-	74	-30.78	0	199	V
			* 3.890292	44.3	ADR	33.2	-45.9	0	31.6	54	-22.4	-	-	0	199	V
			* 11.616542	55.73	PK-U	38.4	-43.2	0	50.93	-	-	74	-23.07	0	199	H
			* 11.616744	44.36	ADR	38.4	-43.2	0	39.56	54	-14.44	-	-	0	199	H
			* 11.618711	55.62	PK-U	38.4	-43.2	0	50.82	-	-	74	-23.18	0	101	V
			* 11.617638	44.19	ADR	38.4	-43.2	0	39.39	54	-14.61	-	-	0	101	V
			* 1.274178	59.84	PK-U	29.4	-47.82	0	41.42	-	-	88.2	-46.78	0	101	H
			* 1.274707	48.45	ADR	29.4	-47.87	0	29.98	68.2	-38.22	-	-	0	101	H
			* 4.161862	56.3	PK-U	33.5	-46.2	0	43.6	-	-	74	-30.4	0	200	H
	6715	6 + 5	* 4.161433	44.3	ADR	33.5	-46.2	0	31.6	54	-22.4	-	-	0	200	H
			* 1.276089	59.91	PK-U	29.4	-47.9	0	41.41	-	-	88.2	-46.79	0	200	V
			* 1.273738	48.42	ADR	29.4	-47.83	0	29.99	68.2	-38.21	-	-	0	200	V
			* 4.159541	55.9	PK-U	33.5	-46.25	0	43.15	-	-	74	-30.85	0	200	V
			* 4.159861	44.52	ADR	33.5	-46.21	0	31.81	54	-22.19	-	-	0	200	V
			* 11.618675	55.51	PK-U	38.4	-43.2	0	50.71	-	-	74	-23.29	0	200	H
			* 11.617799	44.11	ADR	38.4	-43.2	0	39.31	54	-14.69	-	-	0	200	H
			* 11.613919	55.93	PK-U	38.4	-43.1	0	51.23	-	-	74	-22.77	0	200	V
			* 11.617677	44.18	ADR	38.4	-43.2	0	39.38	54	-14.62	-	-	0	200	V
			* 1.225484	60.19	PK-U	29	-47.95	0	41.24	-	-	74	-32.76	0	101	H
			* 1.223456	48.29	ADR	29	-48	0	29.29	54	-24.71	-	-	0	101	H
			* 3.932379	56.06	PK-U	33.3	-45.8	0	43.56	-	-	74	-30.44	0	101	H
			* 3.934467	44.44	ADR	33.3	-45.8	0	31.94	54	-22.06	-	-	0	101	H
			* 1.22379	59.84	PK-U	29	-48	0	40.84	-	-	74	-33.16	0	198	V
	6875 (Straddle)	6 + 5	* 1.222588	48.41	ADR	29	-48	0	29.41	54	-24.59	-	-	0	198	V
			* 3.931646	56.18	PK-U	33.3	-45.8	0	43.68	-	-	74	-30.32	0	101	V
			* 3.93203	44.33	ADR	33.3	-45.8	0	31.83	54	-22.17	-	-	0	101	V
			* 11.658998	55.41	PK-U	38.5	-43.3	0	50.61	-	-	74	-23.39	0	101	H
			* 11.65642	44.1	ADR	38.5	-43.4	0	39.2	54	-14.8	-	-	0	101	H
			* 11.658757	55.4	PK-U	38.5	-43.32	0	50.58	-	-	74	-23.42	0	198	V
			* 11.660771	43.86	ADR	38.5	-43.4	0	38.96	54	-15.04	-	-	0	198	V
			2.1765	49.19	ADR	31.8	-50.34	0	30.65	68.2	-37.55	-	-	74	192	H
			2.177029	60.44	PK-U	31.8	-50.31	0	41.93	-	-	88.2	-46.27	74	192	H
			2.178981	49.27	ADR	31.8	-50.36	0	30.71	68.2	-37.49	-	-	241	107	V
			2.180547	61.78	PK-U	31.9	-50.38	0	43.3	-	-	88.2	-44.9	241	107	V
			* 3.26404	46.5	ADR	33.1	-47.98	0	31.62	54	-22.38	-	-	29	318	H
			* 3.265108	57.85	PK-U	33.1	-47.97	0	42.98	-	-	74	-31.02	29	318	H
			* 3.265965	46.58	ADR	33.1	-47.93	0	31.75	54	-22.25	-	-	300	335	V
			* 3.266499	57.99	PK-U	33.1	-47.96	0	43.13	-	-	74	-30.87	300	335	V
11be (Partial RU Mode / Highest PSD)	6535 (26T)	6 + 5	13.076765	56.2	PK-U	39.1	-44.57	0	50.73	-	-	88.2	-37.47	206	244	H
			13.077861	44.54	ADR	39.1	-44.58	0	39.06	68.2	-29.14	-	-	206	244	H
			13.079309	56.44	PK-U	39.1	-44.57	0	50.97	-	-	88.2	-37.23	142	394	V
			13.079724	44.83	ADR	39.1	-44.57	0	39.36	68.2	-28.84	-	-	142	394	V
			2.170131	49.13	ADR	31.8	-50.36	0	30.57	68.2	-37.63	-	-	260	228	V
			2.170386	60.73	PK-U	31.8	-50.36	0	42.17	-	-	88.2	-46.03	260	228	V
			2.171242	49.3	ADR	31.8	-50.35	0	30.75	68.2	-37.45	-	-	147	314	H
			2.17155	60.97	PK-U	31.8	-50.34	0	42.43	-	-	88.2	-45.77	147	314	H
			3.259511	46.79	ADR	33.1	-48	0	31.89	68.2	-36.31	-	-	41	382	V
			* 3.260108	46.76	ADR	33.1	-48.01	0	31.85	54	-22.15	-	-	256	194	H
			* 3.261084	58.27	PK-U	33.1	-48.02	0	43.35	-	-	74	-30.65	41	382	V
			* 3.262485	58.51	PK-U	33.1	-47.97	0	43.64	-	-	74	-30.36	256	194	H
			13.07476	44.65	ADR	39.1	-44.53	0	39.22	68.2	-28.98	-	-	219	312	V
			13.075074	56.06	PK-U	39.1	-44.54	0	50.62	-	-	88.2	-37.58	206	173	H
			13.077125	44.29	ADR	39.1	-44.58	0	38.81	68.2	-29.39	-	-	206	173	H
			13.077518	55.77	PK-U	39.1	-44.58	0	50.29	-	-	88.2	-37.91	219	312	V
	6715 (26T)	6 + 5	* 2.287717	61.18	PK-U	32.1	-50.82	0	42.46	-	-	74	-31.54	83	380	V
			* 2.288496	49.77	ADR	32.1	-50.81	0	31.06	54	-22.94	-	-	83	380	V
			* 2.291416	61.03	PK-U	32.1	-50.79	0	42.34	-	-	74	-31.66	277	170	H
			* 2.292571	49.65	ADR	32.1	-50.79	0	30.96	54	-23.04	-	-	277	170	H
			3.431073	46.03	ADR	32.8	-47.94	0	30.89	68.2	-37.31	-	-	344	122	H
			3.43195	45.92	ADR	32.8	-47.97	0	30.75	68.2	-37.45	-	-	290	224	V
			3.433373	58.08	PK-U	32.8	-48	0	42.88	-	-	88.2	-45.32	344	122	H
			3.434332	57.53	PK-U	32.8	-47.99	0	42.34	-	-	88.2	-45.86	290	224	V
			13.748492	57.43	PK-U	38.8	-45.41	0	50.82	-	-	88.2	-37.38	147	190	H
			13.7488	45.47	ADR	38.8	-45.4	0	38.87	68.2	-29.33	-	-	147	190	H
			13.749324	57.72	PK-U	38.8	-45.4	0	51.12	-	-	88.2	-37.08	352	272	V
			13.749536	45.68	ADR	38.8	-45.41	0	39.07	68.2	-29.13	-	-	352	272	V
	6875 (Straddle) (26T)	6 + 5														

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6535MHz)

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.22691	59.5	PK-U	29	0	-48	40.5	-	-	74	-33.5	0	101	H
1	* 1.22651	48.32	ADR	29	0	-48	29.32	54	-24.68	-	-	0	101	H
3	* 3.8938	55.91	PK-U	33.2	0	-45.8	43.31	-	-	74	-30.69	0	200	H
3	* 3.892369	44.24	ADR	33.2	0	-45.8	31.64	54	-22.36	-	-	0	200	H
2	* 1.225156	60.04	PK-U	29	0	-47.92	41.12	-	-	74	-32.88	0	101	V
2	* 1.226283	48.06	ADR	29	0	-48	29.06	54	-24.94	-	-	0	101	V
4	* 3.891918	55.83	PK-U	33.2	0	-45.81	43.22	-	-	74	-30.78	0	199	V
4	* 3.890292	44.3	ADR	33.2	0	-45.9	31.6	54	-22.4	-	-	0	199	V
5	* 11.616542	55.73	PK-U	38.4	0	-43.2	50.93	-	-	74	-23.07	0	199	H
5	* 11.616744	44.36	ADR	38.4	0	-43.2	39.56	54	-14.44	-	-	0	199	H
6	* 11.618711	55.62	PK-U	38.4	0	-43.2	50.82	-	-	74	-23.18	0	101	V
6	* 11.617638	44.19	ADR	38.4	0	-43.2	39.39	54	-14.61	-	-	0	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

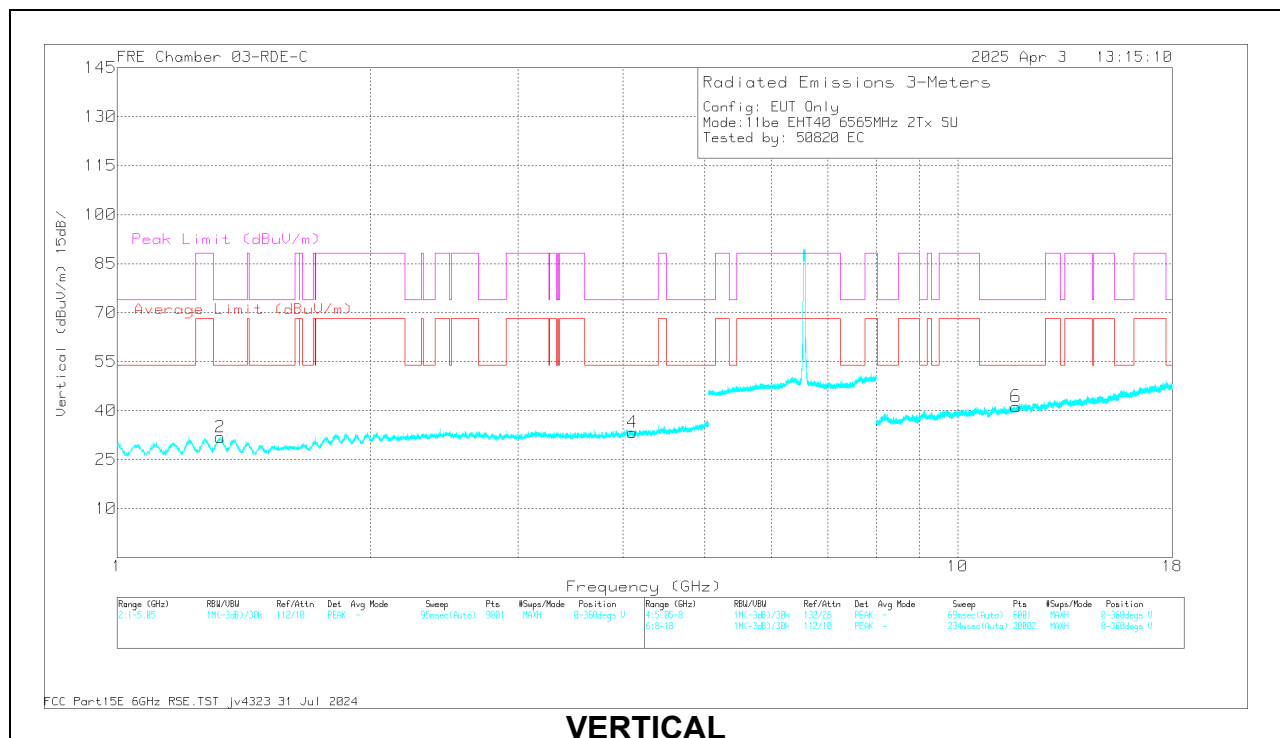
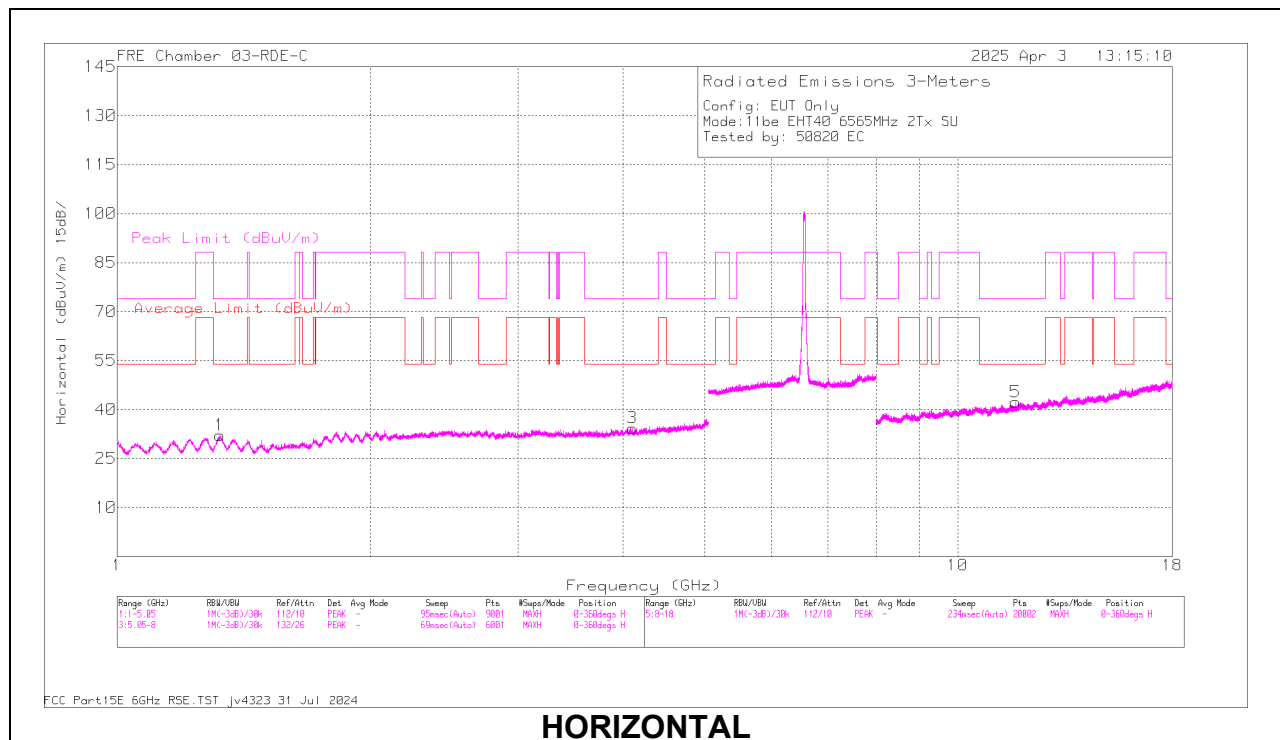
40MHz

UNII-7 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filt/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6565	6 + 5	* 1.325864	60.33	PK-U	29.3	-47.8	0	41.83	-	-	74	-32.17	322	114	H
			* 1.325681	48.71	ADR	29.3	-47.8	0	30.21	54	-23.79	-	-	322	114	H
			* 4.099609	55.93	PK-U	33.4	-46.14	0	43.19	-	-	74	-30.81	17	352	H
			* 4.097228	44.54	ADR	33.4	-46.18	0	31.76	54	-22.24	-	-	17	352	H
			* 1.323874	60.15	PK-U	29.3	-47.8	0	41.65	-	-	74	-32.35	60	142	V
			* 1.324812	48.58	ADR	29.3	-47.8	0	30.08	54	-23.92	-	-	60	142	V
			* 4.099095	56.49	PK-U	33.4	-46.19	0	43.7	-	-	74	-30.3	2	261	V
			* 4.100765	44.17	ADR	33.4	-46.18	0	31.39	54	-22.61	-	-	2	261	V
			* 11.713678	55.21	PK-U	38.5	-43.5	0	50.21	-	-	74	-23.79	185	234	H
			* 11.712395	43.58	ADR	38.5	-43.5	0	38.58	54	-15.42	-	-	185	234	H
			* 11.730779	55.25	PK-U	38.6	-43.5	0	50.35	-	-	74	-23.65	299	334	V
			* 11.728852	43.51	ADR	38.6	-43.5	0	38.61	54	-15.39	-	-	299	334	V
	6685	6 + 5	* 1.320934	59.89	PK-U	29.3	-47.8	0	41.39	-	-	74	-32.61	234	249	H
			* 1.321185	48.31	ADR	29.3	-47.8	0	29.81	54	-24.19	-	-	234	249	H
			* 3.976356	55.48	PK-U	33.4	-45.8	0	43.08	-	-	74	-30.92	69	303	H
			* 3.975557	43.95	ADR	33.4	-45.8	0	31.55	54	-22.45	-	-	69	303	H
			* 1.324142	59.94	PK-U	29.3	-47.8	0	41.44	-	-	74	-32.56	0	282	V
			* 1.324419	48.67	ADR	29.3	-47.8	0	30.17	54	-23.83	-	-	0	282	V
			* 3.972697	56.26	PK-U	33.4	-45.83	0	43.83	-	-	74	-30.17	287	395	V
			* 3.974648	44.43	ADR	33.4	-45.8	0	32.03	54	-21.97	-	-	287	395	V
			* 12.158391	55.61	PK-U	39	-43.24	0	51.37	-	-	74	-22.63	67	365	H
			* 12.158535	43.81	ADR	39	-43.25	0	39.56	54	-14.44	-	-	67	365	H
			* 12.159252	55.54	PK-U	39	-43.27	0	51.27	-	-	74	-22.73	170	149	V
			* 12.15832	43.75	ADR	39	-43.23	0	39.52	54	-14.48	-	-	170	149	V
	6845	6 + 5	* 1.329766	60.12	PK-U	29.3	-47.8	0	41.62	-	-	74	-32.38	259	284	H
			* 1.327998	48.56	ADR	29.3	-47.8	0	30.06	54	-23.94	-	-	259	284	H
			* 4.018923	56.03	PK-U	33.4	-46	0	43.43	-	-	74	-30.57	264	308	H
			* 4.019585	44.21	ADR	33.4	-46	0	31.61	54	-22.39	-	-	264	308	H
			* 1.32409	59.92	PK-U	29.3	-47.8	0	41.42	-	-	74	-32.58	128	257	V
			* 1.323198	48.67	ADR	29.3	-47.8	0	30.17	54	-23.83	-	-	128	257	V
			* 4.018656	57.39	PK-U	33.4	-46	0	44.79	-	-	74	-29.21	194	400	V
			* 4.018848	44.76	ADR	33.4	-46	0	32.16	54	-21.84	-	-	194	400	V
			* 11.841026	54.64	PK-U	38.7	-42.4	0	50.94	-	-	74	-23.06	317	141	H
			* 11.840527	43.08	ADR	38.7	-42.45	0	39.33	54	-14.67	-	-	317	141	H
			* 11.843607	54.99	PK-U	38.7	-42.3	0	51.39	-	-	74	-22.61	198	320	V
			* 11.841959	43.11	ADR	38.7	-42.4	0	39.41	54	-14.59	-	-	198	320	V
11be (Partial RU Mode / Highest PSD)	6565 (52T)	6 + 5	2.552055	61.4	PK-U	32.4	-49.71	0	44.09	-	-	88.2	-44.11	267	161	H
			2.547016	49.25	ADR	32.4	-49.69	0	31.96	68.2	-36.24	-	-	267	161	H
			* 3.932974	58.33	PK-U	33.4	-47.77	0	43.96	-	-	74	-30.04	311	388	H
			* 3.916607	46.32	ADR	33.5	-47.86	0	31.96	54	-22.04	-	-	311	388	H
			2.554105	61.62	PK-U	32.4	-49.71	0	44.31	-	-	88.2	-43.89	23	351	V
			2.545991	49.17	ADR	32.4	-49.71	0	31.86	68.2	-36.34	-	-	23	351	V
			* 3.896773	57.74	PK-U	33.5	-47.78	0	43.46	-	-	74	-30.54	128	205	V
			* 3.914069	46.3	ADR	33.5	-47.87	0	31.93	54	-22.07	-	-	128	205	V
			14.424234	55.49	PK-U	39.2	-43.42	0	51.27	-	-	88.2	-36.93	231	395	H
			14.413747	43.69	ADR	39.2	-43.74	0	39.15	68.2	-29.05	-	-	231	395	H
			14.41789	55.36	PK-U	39.2	-43.6	0	50.96	-	-	88.2	-37.24	47	215	V
			14.417874	43.62	ADR	39.2	-43.6	0	39.22	68.2	-28.98	-	-	47	215	V
	6685 (52T)	6 + 5	2.108398	61.11	PK-U	31.9	-50.21	0	42.8	-	-	88.2	-45.4	102	280	H
			2.158726	49.32	ADR	31.7	-50.25	0	30.77	68.2	-37.43	-	-	102	280	H
			* 3.631671	57.93	PK-U	33.3	-47.69	0	43.54	-	-	74	-30.46	341	249	H
			* 3.642958	46.38	ADR	33.3	-47.69	0	31.99	54	-22.01	-	-	341	249	H
			2.439492	61.18	PK-U	32.5	-50.11	0	43.57	-	-	88.2	-44.63	17	226	V
			2.439847	49.17	ADR	32.5	-50.12	0	31.55	68.2	-36.65	-	-	17	226	V
			* 3.653009	57.97	PK-U	33.2	-47.68	0	43.49	-	-	74	-30.51	173	267	V
			* 3.641943	46.46	ADR	33.3	-47.7	0	32.06	54	-21.94	-	-	173	267	V
			14.050281	55.95	PK-U	39.1	-43.64	0	51.41	-	-	88.2	-36.79	163	233	H
			14.016001	44.41	ADR	39.1	-43.8	0	39.71	68.2	-28.49	-	-	163	233	H
			14.047421	55.88	PK-U	39.1	-43.55	0	51.43	-	-	88.2	-36.77	199	311	V
			14.021432	44.38	ADR	39.1	-43.71	0	39.77	68.2	-28.43	-	-	199	311	V
	6845 (Straddle) (52T)	6 + 5	2.438997	61.02	PK-U	32.5	-50.1	0	43.42	-	-	88.2	-44.78	185	259	H
			2.447067	49.14	ADR	32.4	-50.17	0	31.37	68.2	-36.83	-	-	185	259	H
			* 3.648195	57.89	PK-U	33.3	-47.64	0	43.55	-	-	74	-30.45	210	193	H
			* 3.638961	46.21	ADR	33.3	-47.72	0	31.79	54	-22.21	-	-	210	193	H
			2.444183	61.07	PK-U	32.5	-50.13	0	43.44	-	-	88.2	-44.76	16	284	V
			2.445845	49.19	ADR	32.4	-50.17	0	31.42	68.2	-36.78	-	-	16	284	V
			* 3.649791	58.1	PK-U	33.2	-47.67	0	43.63	-	-	74	-30.37	338	161	V
			* 3.644783	46.37	ADR	33.3	-47.65	0	32.02	54	-21.98	-	-	338	161	V
			13.997058	55.96	PK-U	39.1	-44.03	0	51.03	-	-	88.2	-37.17	352	216	H
			14.007349	44.3	ADR	39.1	-43.96	0	39.44	68.2	-28.76	-	-	352	216	H
			13.984354	55.36	PK-U	39.1	-44.03	0	50.43	-	-	88.2	-37.77	23	350	V
			13.988702	43.95	ADR	39.1	-44.02	0	39.03	68.2	-29.17	-	-	23	350	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6565MHz)

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.325864	60.33	PK-U	29.3	0	-47.8	41.83	-	-	74	-32.17	322	114	H
* 1.325681	48.71	ADR	29.3	0	-47.8	30.21	54	-23.79	-	-	322	114	H
* 4.099609	55.93	PK-U	33.4	0	-46.14	43.19	-	-	74	-30.81	17	352	H
* 4.097228	44.54	ADR	33.4	0	-46.18	31.76	54	-22.24	-	-	17	352	H
* 1.323874	60.15	PK-U	29.3	0	-47.8	41.65	-	-	74	-32.35	60	142	V
* 1.324812	48.58	ADR	29.3	0	-47.8	30.08	54	-23.92	-	-	60	142	V
* 4.099095	56.49	PK-U	33.4	0	-46.19	43.7	-	-	74	-30.3	2	261	V
* 4.100765	44.17	ADR	33.4	0	-46.18	31.39	54	-22.61	-	-	2	261	V
* 11.713678	55.21	PK-U	38.5	0	-43.5	50.21	-	-	74	-23.79	185	234	H
* 11.712395	43.58	ADR	38.5	0	-43.5	38.58	54	-15.42	-	-	185	234	H
* 11.730779	55.25	PK-U	38.6	0	-43.5	50.35	-	-	74	-23.65	299	334	V
* 11.728852	43.51	ADR	38.6	0	-43.5	38.61	54	-15.39	-	-	299	334	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

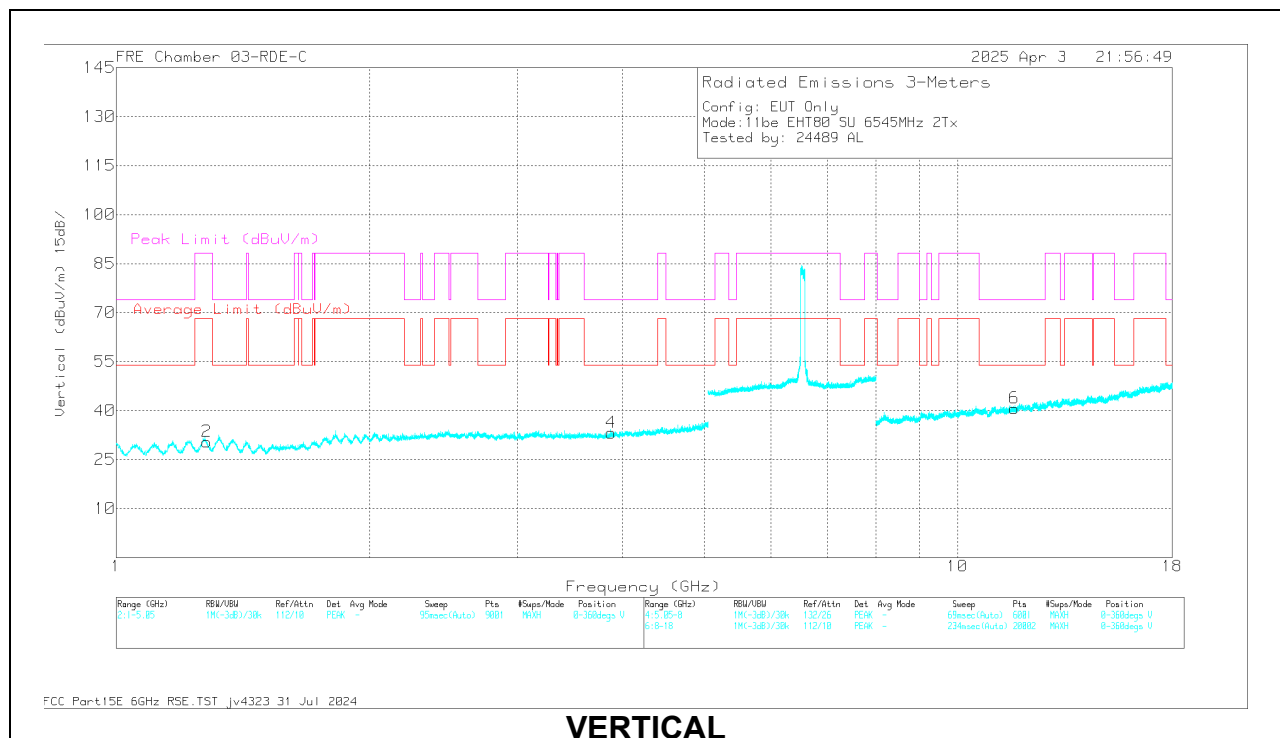
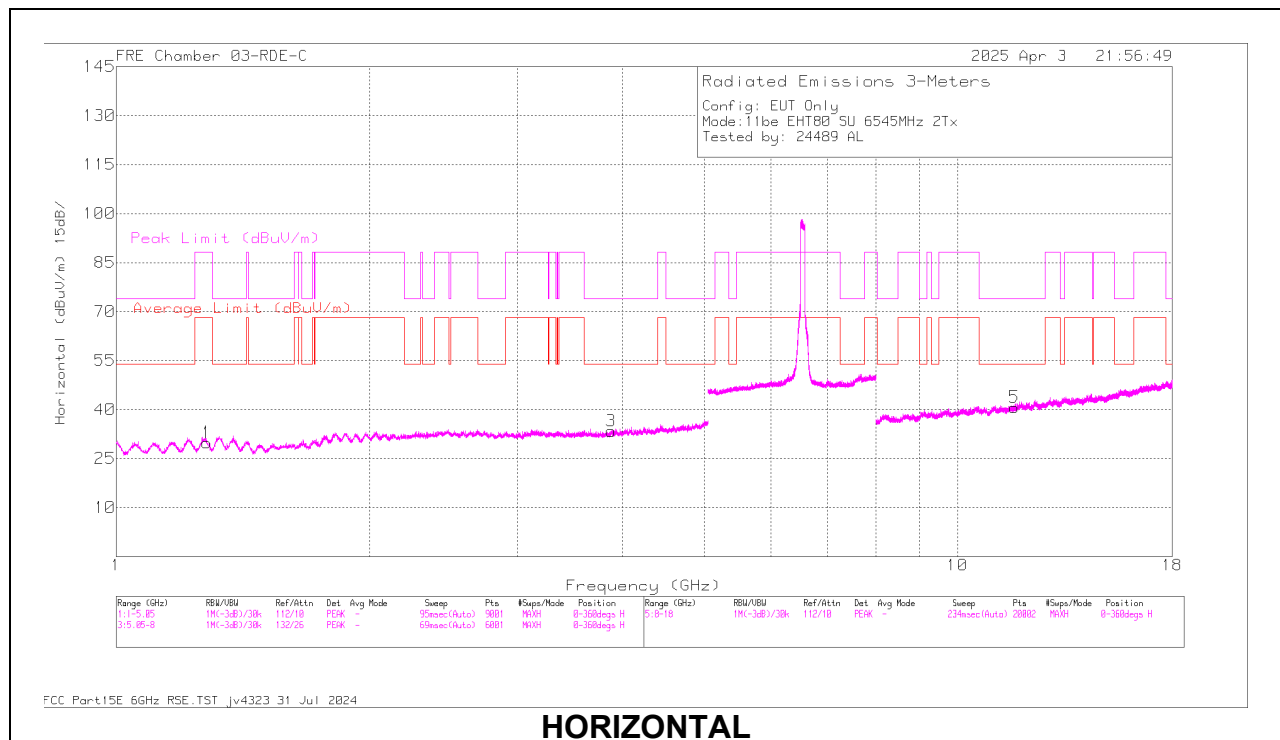
80MHz

UNII-7 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Fltr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6545 (Straddle)	6 + 5	* 1.279007	59.2	PK-U	29.4	-47.9	0	40.7	-	-	88.2	-47.5	1	199	H
			* 1.279495	47.92	ADR	29.4	-47.9	0	29.42	68.2	-38.78	-	-	1	199	H
			* 3.874203	56.28	PK-U	33.2	-45.82	0	43.66	-	-	74	-30.34	1	101	H
			* 3.87419	44.39	ADR	33.2	-45.82	0	31.77	54	-22.23	-	-	1	101	H
			* 1.279655	59.47	PK-U	29.4	-47.9	0	40.97	-	-	88.2	-47.23	1	199	V
			* 1.280136	47.68	ADR	29.4	-47.89	0	29.19	68.2	-39.01	-	-	1	199	V
			* 3.874185	56.06	PK-U	33.2	-45.82	0	43.44	-	-	74	-30.56	1	101	V
			* 3.875009	44.38	ADR	33.2	-45.9	0	31.68	54	-22.32	-	-	1	101	V
			* 11.682083	55.65	PK-U	38.5	-43.5	0	50.65	-	-	74	-23.35	1	101	H
			* 11.683014	43.86	ADR	38.5	-43.5	0	38.86	54	-15.14	-	-	1	101	H
			* 11.680802	55.25	PK-U	38.5	-43.5	0	50.25	-	-	74	-23.75	1	199	V
			* 11.68065	43.72	ADR	38.5	-43.5	0	38.72	54	-15.28	-	-	1	199	V
	6705	6 + 5	* 1.270496	60.18	PK-U	29.3	-47.9	0	41.58	-	-	88.2	-46.62	0	101	H
			* 1.273229	48.38	ADR	29.3	-47.88	0	29.8	68.2	-38.4	-	-	0	101	H
			* 3.948785	55.82	PK-U	33.4	-45.8	0	43.42	-	-	74	-30.58	0	101	H
			* 3.949625	43.72	ADR	33.4	-45.74	0	31.38	54	-22.62	-	-	0	101	H
			* 1.274936	60.57	PK-U	29.4	-47.89	0	42.08	-	-	88.2	-46.12	0	101	V
			* 1.2728	48.36	ADR	29.3	-47.9	0	29.76	68.2	-38.44	-	-	0	101	V
			* 3.948877	55.19	PK-U	33.4	-45.8	0	42.79	-	-	74	-31.21	0	198	V
			* 3.949038	43.39	ADR	33.4	-45.8	0	30.99	54	-23.01	-	-	0	198	V
			* 11.800984	55.39	PK-U	38.6	-43	0	50.99	-	-	74	-23.01	0	200	H
			* 11.803118	43.59	ADR	38.6	-43	0	39.19	54	-14.81	-	-	0	200	H
			* 11.803553	55.43	PK-U	38.6	-43	0	51.03	-	-	74	-22.97	0	200	V
			* 11.803282	43.68	ADR	38.6	-43	0	39.28	54	-14.72	-	-	0	200	V
	6865 (Straddle)	6 + 5	* 1.276874	59.86	PK-U	29.4	-47.9	0	41.36	-	-	88.2	-46.84	2	199	H
			* 1.275	48.25	ADR	29.4	-47.9	0	29.75	68.2	-38.45	-	-	2	199	H
			* 3.906933	56.12	PK-U	33.2	-45.8	0	43.52	-	-	74	-30.48	2	101	H
			* 3.908897	44.08	ADR	33.2	-45.8	0	31.48	54	-22.52	-	-	2	101	H
			* 1.27477	60.5	PK-U	29.4	-47.88	0	42.02	-	-	88.2	-46.18	2	199	V
			* 1.275399	48.16	ADR	29.4	-47.9	0	29.66	68.2	-38.54	-	-	2	199	V
			* 3.910543	55.92	PK-U	33.2	-45.9	0	43.22	-	-	74	-30.78	2	101	V
			* 3.911601	44.09	ADR	33.3	-45.9	0	31.49	54	-22.51	-	-	2	101	V
			* 11.583616	55.9	PK-U	38.4	-43.26	0	51.04	-	-	74	-22.96	2	199	H
			* 11.582534	43.93	ADR	38.4	-43.25	0	39.08	54	-14.92	-	-	2	199	H
			* 11.582733	55.62	PK-U	38.4	-43.23	0	50.79	-	-	74	-23.21	2	101	V
			* 11.584584	44.02	ADR	38.4	-43.24	0	39.18	54	-14.82	-	-	2	101	V
11be (Partial RU Mode / Highest PSD)	6545 (Straddle) (52T)	6 + 5	* 2.227888	61.34	PK-U	31.8	-50.34	0	42.8	-	-	74	-31.2	178	273	H
			* 2.21169	49.65	ADR	31.8	-50.31	0	31.14	54	-22.86	-	-	178	273	H
			* 3.908466	58.41	PK-U	33.5	-47.78	0	44.13	-	-	74	-29.87	105	169	H
			* 3.913439	46.48	ADR	33.5	-47.85	0	32.13	54	-21.87	-	-	105	169	H
			* 2.229906	61.16	PK-U	31.7	-50.33	0	42.53	-	-	74	-31.47	303	200	V
			* 2.216081	49.46	ADR	31.8	-50.29	0	30.97	54	-23.03	-	-	303	200	V
			* 3.919555	59.12	PK-U	33.4	-47.83	0	44.69	-	-	74	-29.31	3	276	V
			* 3.928789	46.26	ADR	33.4	-47.81	0	31.85	54	-22.15	-	-	3	276	V
			* 13.011153	54.77	PK-U	38.9	-43.44	0	50.23	-	-	88.2	-37.97	22	272	H
			* 13.023911	43.16	ADR	38.9	-43.49	0	38.57	68.2	-29.63	-	-	22	272	H
			* 13.014134	55.25	PK-U	38.9	-43.45	0	50.7	-	-	88.2	-37.5	10	337	V
			* 13.016526	43.33	ADR	38.9	-43.47	0	38.76	68.2	-29.44	-	-	10	337	V
	6705 (52T)	6 + 5	2.669117	60.33	PK-U	32.7	-49.54	0	43.49	-	-	88.2	-44.71	312	143	H
			2.66738	48.48	ADR	32.7	-49.53	0	31.65	68.2	-36.55	-	-	312	143	H
			* 3.905754	58.29	PK-U	33.5	-47.78	0	44.01	-	-	74	-29.99	350	133	H
			* 3.914673	46.28	ADR	33.5	-47.85	0	31.93	54	-22.07	-	-	350	133	H
			2.661486	60.4	PK-U	32.7	-49.52	0	43.58	-	-	88.2	-44.62	171	359	V
			2.666552	48.71	ADR	32.7	-49.53	0	31.88	68.2	-36.32	-	-	171	359	V
			* 3.908976	57.86	PK-U	33.5	-47.77	0	43.59	-	-	74	-30.41	333	331	V
			* 3.919424	46.48	ADR	33.4	-47.83	0	32.05	54	-21.95	-	-	333	331	V
			13.465334	55.57	PK-U	39	-43.65	0	50.92	-	-	88.2	-37.28	85	251	H
			13.468477	43.69	ADR	39	-43.8	0	38.89	68.2	-29.31	-	-	85	251	H
			13.460262	55.36	PK-U	39	-43.61	0	50.75	-	-	88.2	-37.45	346	298	V
			13.468277	43.86	ADR	39	-43.8	0	39.06	68.2	-29.14	-	-	346	298	V
	6865 (Straddle) (52T)	6 + 5	2.174026	61.53	PK-U	31.7	-50.35	0	42.88	-	-	88.2	-45.32	307	393	H
			2.162014	49.68	ADR	31.7	-50.33	0	31.05	68.2	-37.15	-	-	307	393	H
			3.355081	57.87	PK-U	32.7	-47.48	0	43.09	-	-	74	-30.91	230	355	H
			3.365462	46.39	ADR	32.7	-47.35	0	31.74	68.2	-36.46	-	-	230	355	H
			2.154048	61.08	PK-U	31.8	-50.28	0	42.6	-	-	88.2	-45.6	220	276	V
			2.159883	49.47	ADR	31.7	-50.29	0	30.88	68.2	-37.32	-	-	220	276	V
			3.376876	57.65	PK-U	32.8	-47.24	0	43.21	-	-	88.2	-44.99	225	246	V
			3.369406	46.33	ADR	32.7	-47.31	0	31.72	68.2	-36.48	-	-	225	246	V
			13.509659	55.26	PK-U	39	-43.81	0	50.45	-	-	88.2	-37.75	299	272	H
			13.512219	43.64	ADR	39	-43.78	0	38.86	68.2	-29.34	-	-	299	272	H
			13.511511	55.48	PK-U	39	-43.8	0	50.68	-	-	88.2	-37.52	280	311	V
			13.490154	43.55	ADR	39	-43.93	0	38.62	68.2	-29.58	-	-	280	311	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6545MHz)

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.279007	59.2	PK-U	29.4	0	-47.9	40.7	-	-	88.2	-47.5	1	199	H
1	* 1.279495	47.92	ADR	29.4	0	-47.9	29.42	68.2	-38.78	-	-	1	199	H
3	* 3.874203	56.28	PK-U	33.2	0	-45.82	43.66	-	-	74	-30.34	1	101	H
3	* 3.87419	44.39	ADR	33.2	0	-45.82	31.77	54	-22.23	-	-	1	101	H
2	* 1.279655	59.47	PK-U	29.4	0	-47.9	40.97	-	-	88.2	-47.23	1	199	V
2	* 1.280136	47.68	ADR	29.4	0	-47.89	29.19	68.2	-39.01	-	-	1	199	V
4	* 3.874185	56.06	PK-U	33.2	0	-45.82	43.44	-	-	74	-30.56	1	101	V
4	* 3.875009	44.38	ADR	33.2	0	-45.9	31.68	54	-22.32	-	-	1	101	V
5	* 11.682083	55.65	PK-U	38.5	0	-43.5	50.65	-	-	74	-23.35	1	101	H
5	* 11.683014	43.86	ADR	38.5	0	-43.5	38.86	54	-15.14	-	-	1	101	H
6	* 11.680802	55.25	PK-U	38.5	0	-43.5	50.25	-	-	74	-23.75	1	199	V
6	* 11.68065	43.72	ADR	38.5	0	-43.5	38.72	54	-15.28	-	-	1	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

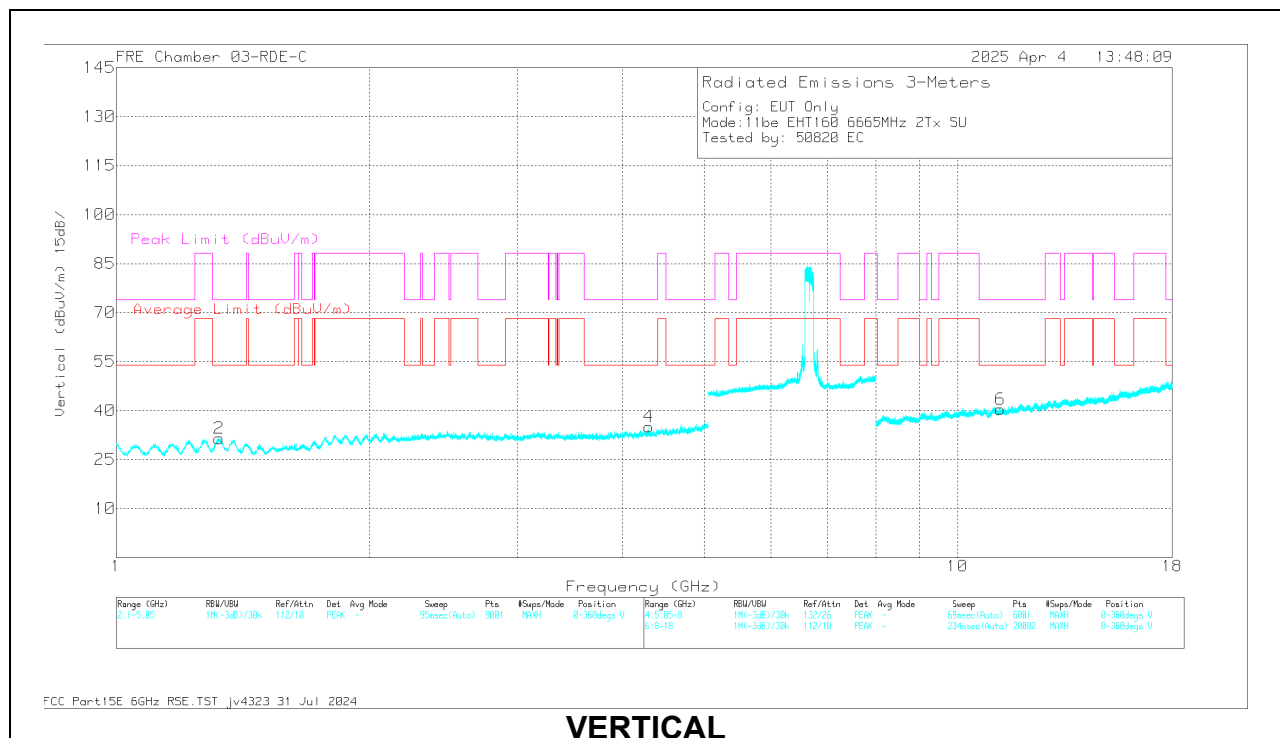
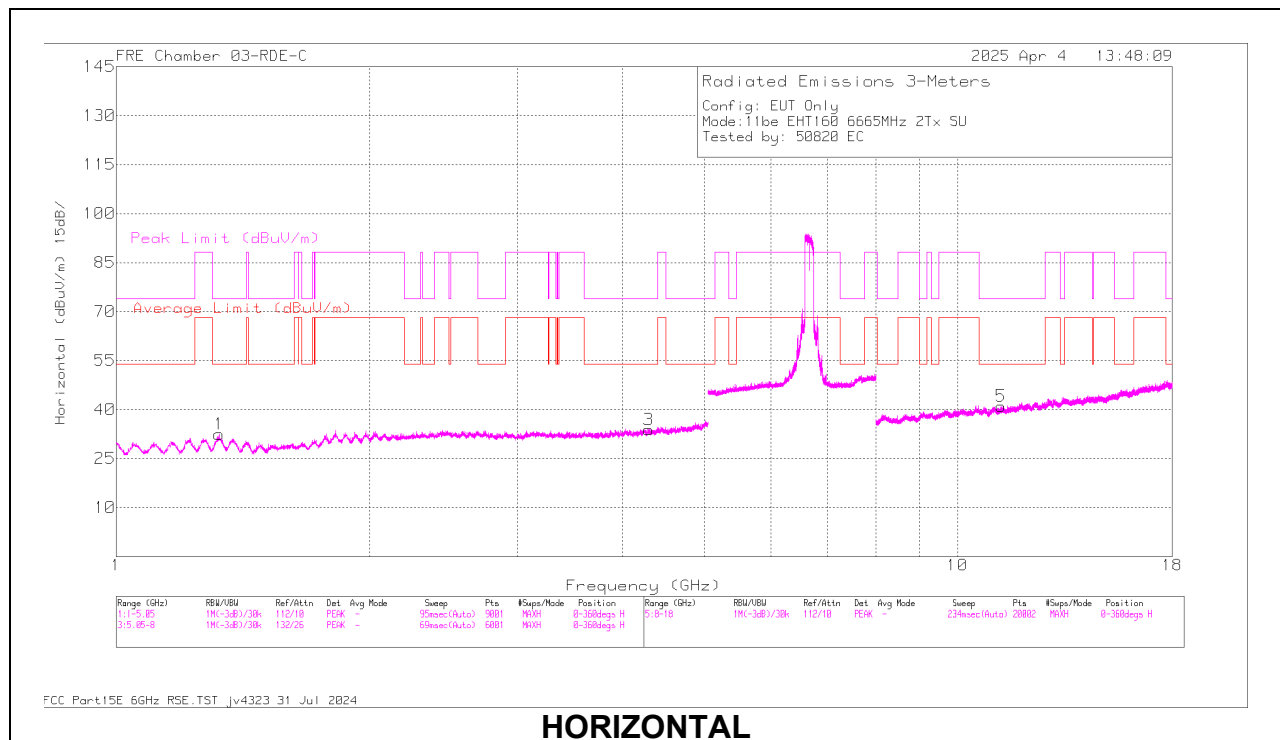
160MHz

UNII-7 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6665	6 + 5	* 1.326317	60.34	PK-U	29.3	-47.8	0	41.84	-	-	74	-32.16	214	147	H
			* 1.327646	48.21	ADR	29.3	-47.8	0	29.71	54	-24.29	-	-	214	147	H
			* 4.292682	56.56	PK-U	33.6	-46.53	0	43.63	-	-	74	-30.37	175	332	H
			* 4.294052	44.56	ADR	33.6	-46.5	0	31.66	54	-22.34	-	-	175	332	H
			* 1.32557	60.33	PK-U	29.3	-47.8	0	41.83	-	-	74	-32.17	348	288	V
			* 1.325984	48.4	ADR	29.3	-47.8	0	29.9	54	-24.1	-	-	348	288	V
			* 4.294433	56.73	PK-U	33.6	-46.5	0	43.83	-	-	74	-30.17	85	382	V
			* 4.295628	44.9	ADR	33.6	-46.5	0	32	54	-22	-	-	85	382	V
			* 11.267082	55.39	PK-U	38.1	-43.51	0	49.98	-	-	74	-24.02	194	266	H
			* 11.269684	43.45	ADR	38.1	-43.5	0	38.05	54	-15.95	-	-	194	266	H
	6825 (Straddle)	6 + 5	* 11.249963	56.04	PK-U	38.1	-43.6	0	50.54	-	-	74	-23.46	163	400	V
			* 11.248139	44.19	ADR	38.1	-43.7	0	38.59	54	-15.41	-	-	163	400	V
			* 1.273589	60.52	PK-U	29.4	-47.84	0	42.08	-	-	88.2	-46.12	208	161	H
			* 1.272363	48	ADR	29.3	-47.9	0	29.4	68.2	-38.8	-	-	208	161	H
			* 4.223698	56.15	PK-U	33.6	-46.4	0	43.35	-	-	74	-30.65	205	225	H
			* 4.225696	44.04	ADR	33.6	-46.4	0	31.24	54	-22.76	-	-	205	225	H
			* 1.272077	59.81	PK-U	29.3	-47.9	0	41.21	-	-	88.2	-46.99	339	368	V
			* 1.270367	48.19	ADR	29.3	-47.9	0	29.59	68.2	-38.61	-	-	339	368	V
			* 4.22271	55.87	PK-U	33.6	-46.4	0	43.07	-	-	74	-30.93	254	115	V
			* 4.22445	44.34	ADR	33.6	-46.4	0	31.54	54	-22.46	-	-	254	115	V
11be (Partial RU Mode / Highest PSD)	6665 (52T)	6 + 5	* 11.923491	55.04	PK-U	38.8	-42.4	0	51.44	-	-	74	-22.56	17	358	H
			* 11.922997	42.9	ADR	38.8	-42.4	0	39.3	54	-14.7	-	-	17	358	H
			* 11.921952	54.56	PK-U	38.8	-42.3	0	51.06	-	-	74	-22.94	354	174	V
			* 11.923778	42.89	ADR	38.8	-42.4	0	39.29	54	-14.71	-	-	354	174	V
			* 13.328984	53.46	PK-U	39	-41.4	0	51.06	-	-	74	-22.94	126	181	H
			* 13.33594	41.87	ADR	39	-41.4	0	39.47	54	-14.53	-	-	126	181	H
			* 13.330158	54.02	PK-U	39	-41.4	0	51.62	-	-	74	-22.38	196	198	V
			* 13.335945	42.15	ADR	39	-41.4	0	39.75	54	-14.25	-	-	196	198	V
			1.984661	49.66	ADR	32	-48.1	0	33.56	68.2	-34.64	-	-	22	208	V
			1.985025	49.72	ADR	32	-48.1	0	33.62	68.2	-34.58	-	-	113	224	H
	6825 (Straddle) (52T)	6 + 5	1.98755	61.41	PK-U	32	-48.15	0	45.26	-	-	88.2	-42.94	113	224	H
			1.989474	61.24	PK-U	32	-48.1	0	45.14	-	-	88.2	-43.06	22	208	V
			9.983509	55.74	PK-U	37.7	-44.8	0	48.64	-	-	88.2	-39.56	136	118	V
			9.988621	44.49	ADR	37.8	-44.8	0	37.49	68.2	-30.71	-	-	136	118	V
			10.023859	44.52	ADR	37.8	-45	0	37.32	68.2	-30.88	-	-	332	181	H
			10.024875	56.01	PK-U	37.8	-44.91	0	48.9	-	-	88.2	-39.3	332	181	H
			2.135671	49.8	ADR	32.1	-48.73	0	33.17	68.2	-35.03	-	-	132	266	H
			2.136828	49.82	ADR	32.1	-48.7	0	33.22	68.2	-34.98	-	-	102	304	V
			2.144103	61.34	PK-U	32.1	-48.69	0	44.75	-	-	88.2	-43.45	102	304	V
			2.144647	61.55	PK-U	32.1	-48.64	0	45.01	-	-	88.2	-43.19	132	266	H
			10.252295	55.98	PK-U	38	-44.6	0	49.38	-	-	88.2	-38.82	167	387	V
			10.253351	44.38	ADR	38	-44.6	0	37.78	68.2	-30.42	-	-	167	387	V
			10.256002	44.46	ADR	38	-44.7	0	37.76	68.2	-30.44	-	-	78	314	H
			10.262473	56.11	PK-U	38	-44.7	0	49.41	-	-	88.2	-38.79	78	314	H
			13.604472	53.89	PK-U	38.9	-41	0	51.79	-	-	88.2	-36.41	286	216	V
			13.607151	41.83	ADR	38.9	-40.98	0	39.75	68.2	-28.45	-	-	286	216	V
			13.636058	41.63	ADR	38.9	-40.9	0	39.63	68.2	-28.57	-	-	316	398	H
			13.647396	53.54	PK-U	38.9	-40.94	0	51.5	-	-	88.2	-36.7	316	398	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6665MHz)

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.326317	60.34	PK-U	29.3	0	-47.8	41.84	-	-	74	-32.16	214	147	H
* 1.327646	48.21	ADR	29.3	0	-47.8	29.71	54	-24.29	-	-	214	147	H
* 4.292682	56.56	PK-U	33.6	0	-46.53	43.63	-	-	74	-30.37	175	332	H
* 4.294052	44.56	ADR	33.6	0	-46.5	31.66	54	-22.34	-	-	175	332	H
* 1.32557	60.33	PK-U	29.3	0	-47.8	41.83	-	-	74	-32.17	348	288	V
* 1.325984	48.4	ADR	29.3	0	-47.8	29.9	54	-24.1	-	-	348	288	V
* 4.294433	56.73	PK-U	33.6	0	-46.5	43.83	-	-	74	-30.17	85	382	V
* 4.295628	44.9	ADR	33.6	0	-46.5	32	54	-22	-	-	85	382	V
* 11.267082	55.39	PK-U	38.1	0	-43.51	49.98	-	-	74	-24.02	194	266	H
* 11.269684	43.45	ADR	38.1	0	-43.5	38.05	54	-15.95	-	-	194	266	H
* 11.249963	56.04	PK-U	38.1	0	-43.6	50.54	-	-	74	-23.46	163	400	V
* 11.248139	44.19	ADR	38.1	0	-43.7	38.59	54	-15.41	-	-	163	400	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

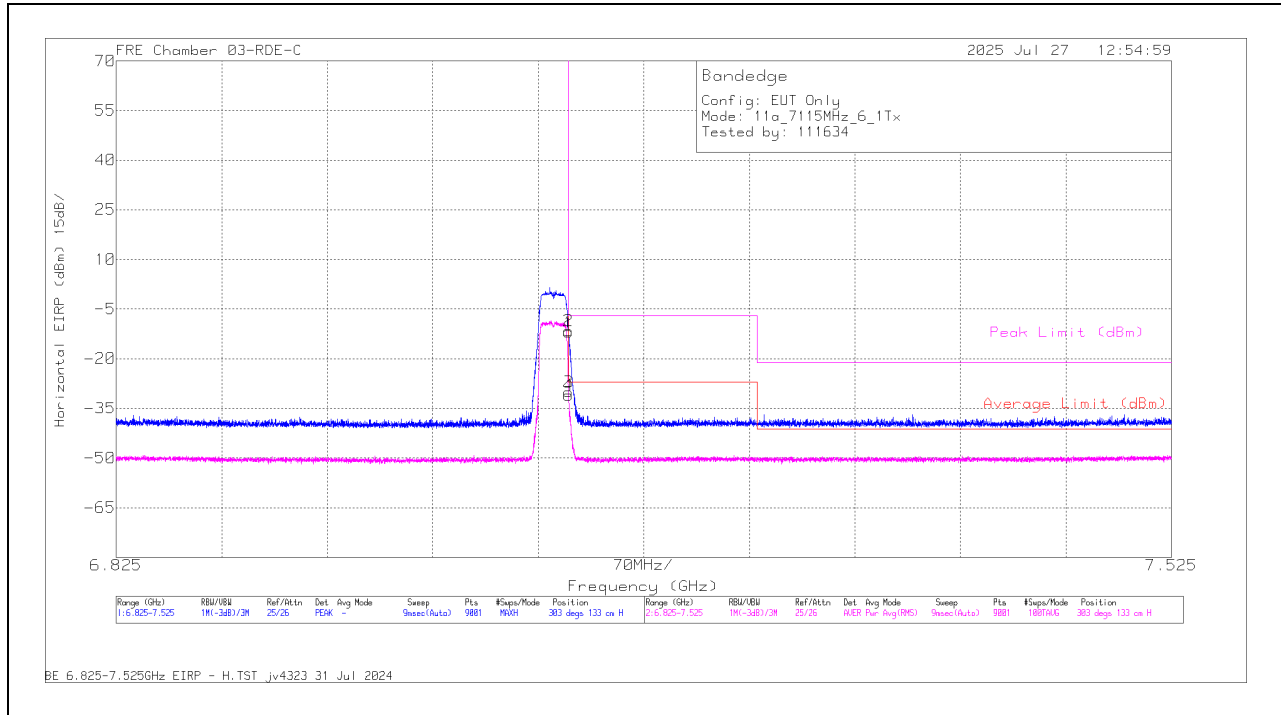
1.1.8. 802.11a SISO MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a	7115	6	7.125	-23.32	Pk	35.5	11.8	0	-35.98	-12	-	-	-7	-5	303	133	H
			7.125	-41.32	RMS	35.5	11.8	0	-35.98	-30	-27	-3	-	-	303	133	H
			7.125068	-22.81	Pk	35.5	11.8	0	-35.98	-11.49	-	-	-7	-4.49	303	133	H
			7.125145	-42.27	RMS	35.5	11.8	0	-35.98	-30.95	-27	-3.95	-	-	303	133	H
			* 7.314224	-47.83	Pk	35.5	11.8	0	-36.05	-36.58	-	-	-21.2	-15.38	291	136	V
			* 7.261723	-60.38	RMS	35.5	11.8	0	-36.05	-49.13	-41.2	-7.93	-	-	291	136	V
		5	7.125	-35.59	Pk	35.5	11.8	0	-35.98	-24.27	-	-	-7	-17.27	291	136	V
			7.125	-55.11	RMS	35.5	11.8	0	-35.98	-43.79	-27	-16.79	-	-	291	136	V
			7.125	-23.15	Pk	35.5	11.8	0	-35.98	-11.83	-	-	-7	-4.83	4	208	H
			7.125	-41.51	RMS	35.5	11.8	0	-35.98	-30.19	-27	-3.19	-	-	4	208	H
			7.125068	-22.77	Pk	35.5	11.8	0	-35.98	-11.45	-	-	-7	-4.45	4	208	H
			7.125223	-42.59	RMS	35.5	11.8	0	-35.98	-31.27	-27	-4.27	-	-	4	208	H
			7.125	-22.88	Pk	35.5	11.8	0	-35.98	-11.56	-	-	-7	-4.56	351	111	V
			7.125	-41.71	RMS	35.5	11.8	0	-35.98	-30.39	-27	-3.39	-	-	351	111	V
			7.125068	-42.16	RMS	35.5	11.8	0	-35.98	-30.84	-27	-3.84	-	-	351	111	V
			7.125145	-24.44	Pk	35.5	11.8	0	-35.98	-13.12	-	-	-7	-6.12	351	111	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

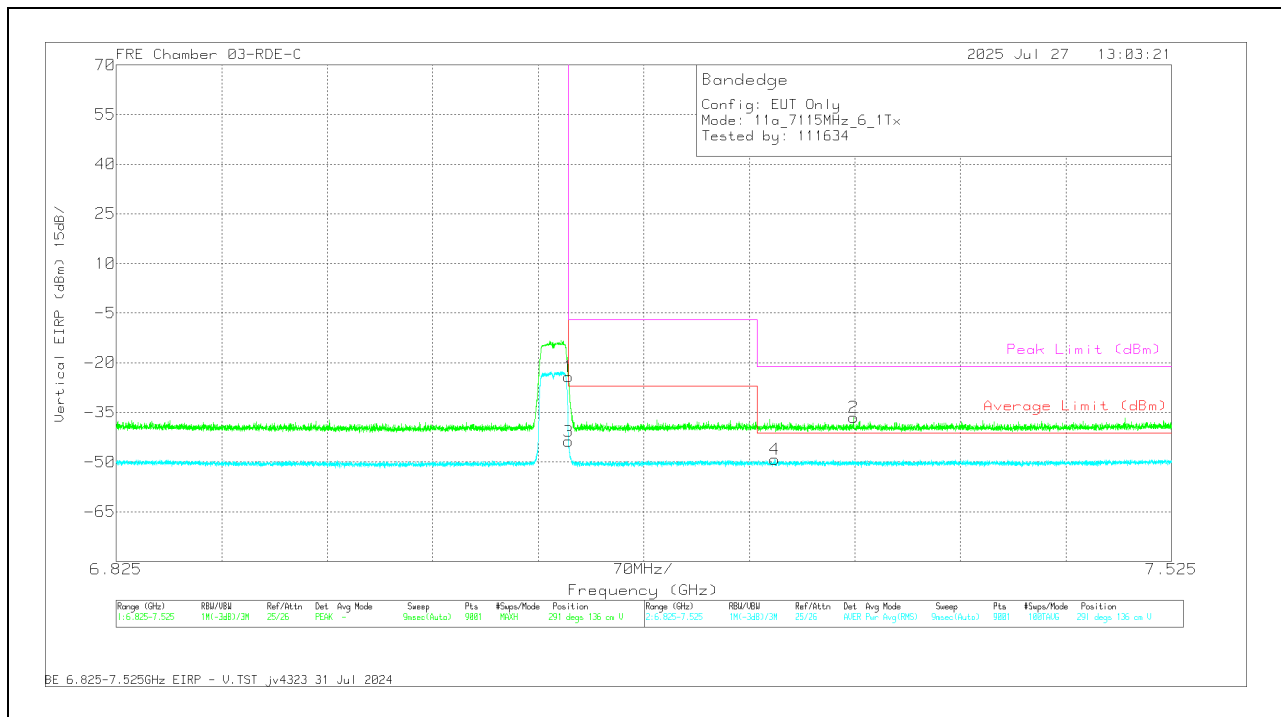
Pk - Peak detector

RMS - RMS detection

1TX Antenna 6 MODE: 11a**BANDEDGE (HIGH CHANNEL / 7115MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dBm)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-23.32	Pk	35.5	11.8	0	-35.98	-12	-	-	-7	-5	303	133	H
3	7.125	-41.32	RMS	35.5	11.8	0	-35.98	-30	-27	-3	-	-	303	133	H
2	7.125068	-22.81	Pk	35.5	11.8	0	-35.98	-11.49	-	-	-7	-4.49	303	133	H
4	7.125145	-42.27	RMS	35.5	11.8	0	-35.98	-30.95	-27	-3.95	-	-	303	133	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 7.314224	-47.83	Pk	35.5	11.8	0	-36.05	-36.58	-	-	-21.2	-15.38	291	136	V
4	* 7.261723	-60.38	RMS	35.5	11.8	0	-36.05	-49.13	-41.2	-7.93	-	-	291	136	V
1	7.125	-35.59	Pk	35.5	11.8	0	-35.98	-24.27	-	-	-7	-17.27	291	136	V
3	7.125	-55.11	RMS	35.5	11.8	0	-35.98	-43.79	-27	-16.79	-	-	291	136	V

Pk - Peak detector

RMS - RMS detection

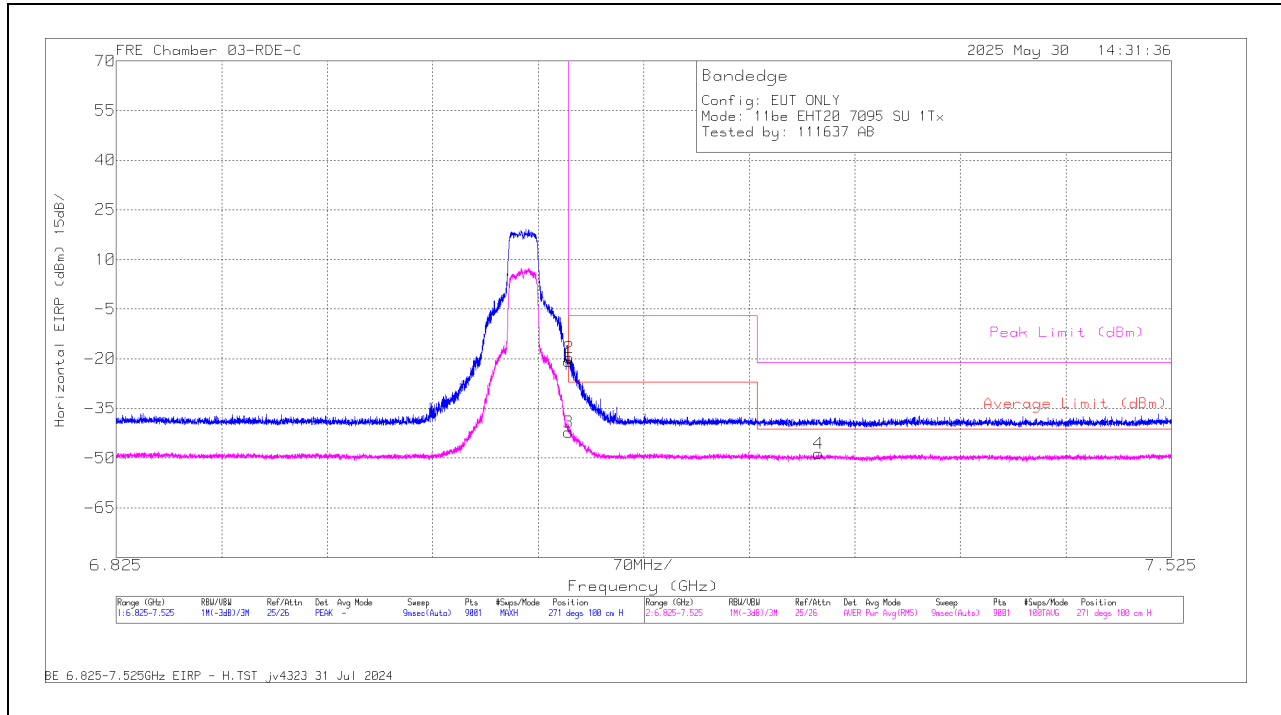
1.1.9. 802.11be SISO SU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading ERP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	7095	6	* 7.290968	-59.93	RMS	35.5	11.8	0	-36.4	-49.03	-41.2	-7.83	-	-	271	100	H
			7.125	-31.98	Pk	35.5	11.8	0	-36.2	-20.88	-	-	-7	-13.88	271	100	H
			7.125	-53.69	RMS	35.5	11.8	0	-36.2	-42.59	-27	-15.59	-	-	271	100	H
			7.125456	-30.81	Pk	35.5	11.8	0	-36.15	-19.66	-	-	-7	-12.66	271	100	H
			* 7.518158	-47.61	Pk	35.6	11.8	0	-36.3	-36.51	-	-	-21.2	-15.31	223	193	V
			* 7.51948	-60.06	RMS	35.6	11.8	0	-36.3	-48.96	-41.2	-7.76	-	-	223	193	V
		5	7.125	-48.46	Pk	35.5	11.8	0	-36.2	-37.36	-	-	-7	-30.36	223	193	V
			7.125	-60.78	RMS	35.5	11.8	0	-36.2	-49.68	-27	-22.68	-	-	223	193	V
			* 7.345024	-47.35	Pk	35.5	11.8	0	-36.4	-36.45	-	-	-21.2	-15.25	285	239	H
			* 7.358168	-59.92	RMS	35.5	11.8	0	-36.4	-49.02	-41.2	-7.82	-	-	285	239	H
			7.125	-47.16	Pk	35.5	11.8	0	-36.2	-36.06	-	-	-7	-29.06	285	239	H
			7.125	-59.6	RMS	35.5	11.8	0	-36.2	-48.5	-27	-21.5	-	-	285	239	H
		6	* 7.512013	-47.74	Pk	35.6	11.8	0	-36.3	-36.64	-	-	-21.2	-15.44	214	195	V
			* 7.524458	-60.13	RMS	35.6	11.8	0	-36.25	-48.98	-41.2	-7.78	-	-	214	195	V
			7.125	-47.37	Pk	35.5	11.8	0	-36.2	-36.27	-	-	-7	-29.27	214	195	V
			7.125	-60.69	RMS	35.5	11.8	0	-36.2	-49.59	-27	-22.59	-	-	214	195	V
		5	7.125	-26.33	Pk	35.7	11.8	0	-38.3	-17.13	-	-	-7	-10.13	101	113	H
			7.125	-43.36	RMS	35.7	11.8	0	-38.3	-34.16	-27	-7.16	-	-	101	113	H
			7.125923	-41.69	RMS	35.7	11.8	0	-38.3	-32.49	-27	-5.49	-	-	101	113	H
			7.126623	-23.74	Pk	35.7	11.8	0	-38.3	-14.54	-	-	-7	-7.54	101	113	H
			* 7.334135	-47.44	Pk	35.6	11.8	0	-38.3	-38.34	-	-	-21.2	-17.14	330	109	V
			* 7.404524	-59.04	RMS	35.6	11.8	0	-38.6	-50.24	-41.2	-9.04	-	-	330	109	V
EHT40 (SU Mode)	7085	6	7.125	-38.8	Pk	35.7	11.8	0	-38.3	-29.6	-	-	-7	-22.6	330	109	V
			7.125	-54.98	RMS	35.7	11.8	0	-38.3	-45.78	-27	-18.78	-	-	330	109	V
			* 7.494046	-59.18	RMS	35.7	11.8	0	-38.6	-50.28	-41.2	-9.08	-	-	261	216	H
			7.125	-33.17	Pk	35.7	11.8	0	-38.3	-23.97	-	-	-7	-16.97	261	216	H
			7.125	-49.7	RMS	35.7	11.8	0	-38.3	-40.5	-27	-13.5	-	-	261	216	H
			7.125223	-30.6	Pk	35.7	11.8	0	-38.3	-21.4	-	-	-7	-14.4	261	216	H
		5	* 7.378546	-59.05	RMS	35.6	11.8	0	-38.5	-50.15	-41.2	-8.95	-	-	215	249	V
			7.125	-34.19	Pk	35.7	11.8	0	-38.3	-24.99	-	-	-7	-17.99	215	249	V
			7.125	-50.9	RMS	35.7	11.8	0	-38.3	-41.7	-27	-14.7	-	-	215	249	V
			7.126623	-32	Pk	35.7	11.8	0	-38.3	-22.8	-	-	-7	-15.8	215	249	V
			7.125	-33.37	Pk	35.8	11.8	0	-33.4	-19.17	-	-	-7	-12.17	219	102	H
			7.125768	-31.06	Pk	35.8	11.8	0	-33.2	-16.66	-	-	-7	-9.66	219	102	H
		6	7.125	-48.13	RMS	35.8	11.8	0	-33.4	-33.93	-27	-6.93	-	-	219	102	H
			* 7.52368	-61.22	RMS	35.7	11.8	0	-32.9	-46.62	-41.2	-5.42	-	-	219	102	H
			7.125	-51.39	Pk	35.8	11.8	0	-33.4	-37.19	-	-	-7	-30.19	295	256	V
			* 7.380568	-48.7	Pk	35.7	11.8	0	-32.9	-34.1	-	-	-21.2	-12.9	295	256	V
			7.125	-62.97	RMS	35.8	11.8	0	-33.4	-48.77	-27	-21.77	-	-	295	256	V
			* 7.454146	-61.12	RMS	35.7	11.8	0	-33	-46.62	-41.2	-5.42	-	-	295	256	V
		5	* 7.467524	-55.55	Pk	35.6	11.8	0	-27.9	-36.05	-	-	-21.2	-14.85	254	283	H
			* 7.49148	-67.41	RMS	35.6	11.8	0	-27.9	-47.91	-41.2	-6.71	-	-	254	283	H
			7.125	-52.79	Pk	35.6	11.8	0	-28.4	-33.79	-	-	-7	-26.79	254	283	H
			7.125	-66.41	RMS	35.6	11.8	0	-28.4	-47.41	-27	-20.41	-	-	254	283	H
			* 7.394646	-55.56	Pk	35.6	11.8	0	-28	-36.16	-	-	-21.2	-14.96	230	136	V
			* 7.516446	-67.38	RMS	35.6	11.8	0	-27.9	-47.88	-41.2	-6.68	-	-	230	136	V
EHT80 (SU Mode)	7025	6	7.125	-52.24	Pk	35.6	11.8	0	-28.4	-33.24	-	-	-7	-26.24	230	136	V
			7.125	-67.03	RMS	35.6	11.8	0	-28.4	-48.03	-27	-21.03	-	-	230	136	V
			7.125	-46.8	Pk	35.5	11.8	0	-24.1	-23.6	-	-	-7	-16.6	226	104	H
			7.125	-63.26	RMS	35.5	11.8	0.14	-24.1	-39.92	-27	-12.92	-	-	226	104	H
			7.131212	-54.82	RMS	35.5	11.8	0.14	-24.1	-31.48	-27	-4.48	-	-	226	104	H
			7.133468	-40.81	Pk	35.5	11.8	0	-24.1	-17.61	-	-	-7	-10.61	226	104	H
		5	* 7.35529	-60.19	Pk	35.6	11.8	0	-23.6	-36.39	-	-	-21.2	-15.19	242	207	V
			* 7.398457	-72.46	RMS	35.6	11.8	0.14	-23.7	-48.62	-41.2	-7.42	-	-	242	207	V
			7.125	-60.82	Pk	35.5	11.8	0	-24.1	-37.62	-	-	-7	-30.62	242	207	V
			7.125	-72.55	RMS	35.5	11.8	0.14	-24.1	-49.21	-27	-22.21	-	-	242	207	V
			* 7.391691	-55.42	Pk	35.6	11.8	0	-28	-36.02	-	-	-21.2	-14.82	249	243	H
			* 7.483235	-67.27	RMS	35.6	11.8	0.14	-27.9	-47.63	-41.2	-6.43	-	-	249	243	H
		6	7.125	-48.52	Pk	35.6	11.8	0	-28.4	-29.52	-	-	-7	-22.52	249	243	H
			7.125	-65.4	RMS	35.6	11.8	0.14	-28.4	-46.26	-27	-19.26	-	-	249	243	H
			* 7.513258	-54.61	Pk	35.6	11.8	0	-27.9	-35.11	-	-	-21.2	-13.91	231	141	V
			* 7.523835	-67.4	RMS	35.6	11.8	0.14	-27.9	-47.76	-41.2	-6.56	-	-	231	141	V
			7.125	-50.12	Pk	35.6	11.8	0	-28.4	-31.12	-	-	-7	-24.12	231	141	V
			7.125	-66.24	RMS	35.6	11.8	0.14	-28.4	-47.1	-27	-20.1	-	-	231	141	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

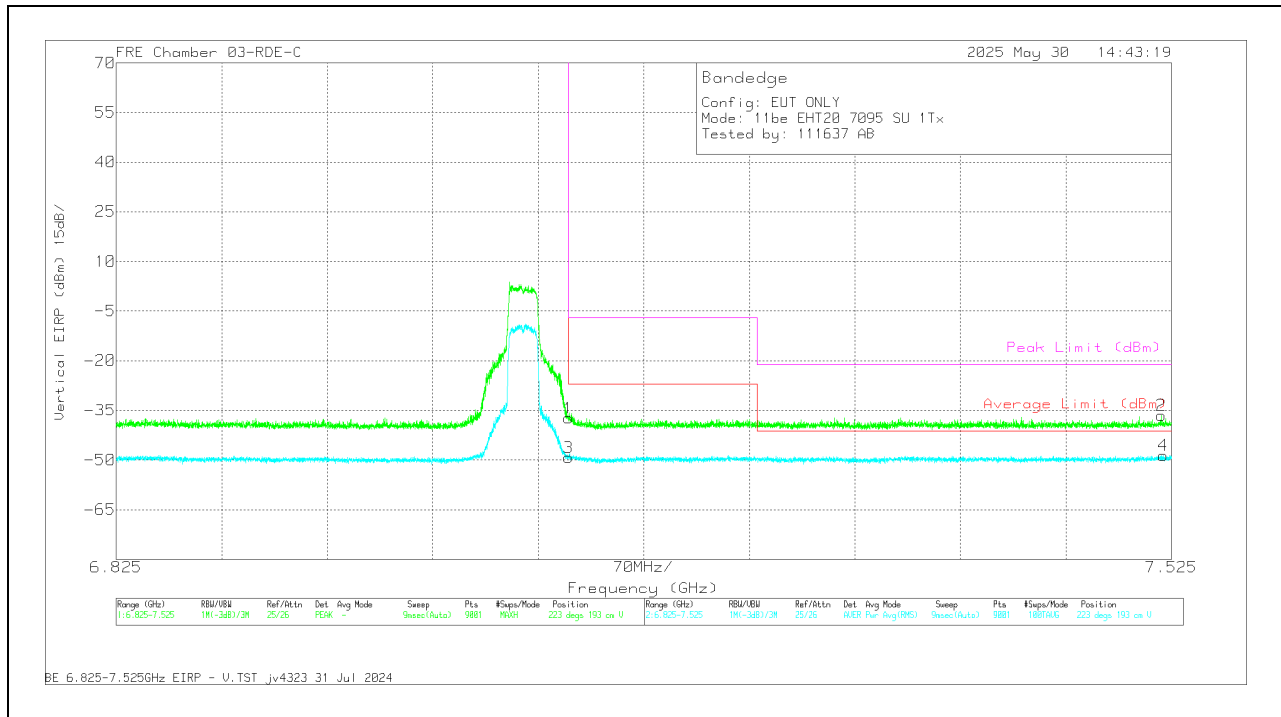
1TX Antenna 6 MODE: SU**BANDEDGE (HIGH CHANNEL / 7095MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dBm)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 7.290968	-59.93	RMS	35.5	11.8	0	-36.4	-49.03	-41.2	-7.83	-	-	271	100	H
1	7.125	-31.98	PK	35.5	11.8	0	-36.2	-20.88	-	-	-7	-13.88	271	100	H
3	7.125	-53.69	RMS	35.5	11.8	0	-36.2	-42.59	-27	-15.59	-	-	271	100	H
2	7.125456	-30.81	PK	35.5	11.8	0	-36.15	-19.66	-	-	-7	-12.66	271	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 7.518158	-47.61	PK	35.6	11.8	0	-36.3	-36.51	-	-	-21.2	-15.31	223	193	V
4	* 7.51948	-60.06	RMS	35.6	11.8	0	-36.3	-48.96	-41.2	-7.76	-	-	223	193	V
1	7.125	-48.46	PK	35.5	11.8	0	-36.2	-37.36	-	-	-7	-30.36	223	193	V
3	7.125	-60.78	RMS	35.5	11.8	0	-36.2	-49.68	-27	-22.68	-	-	223	193	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

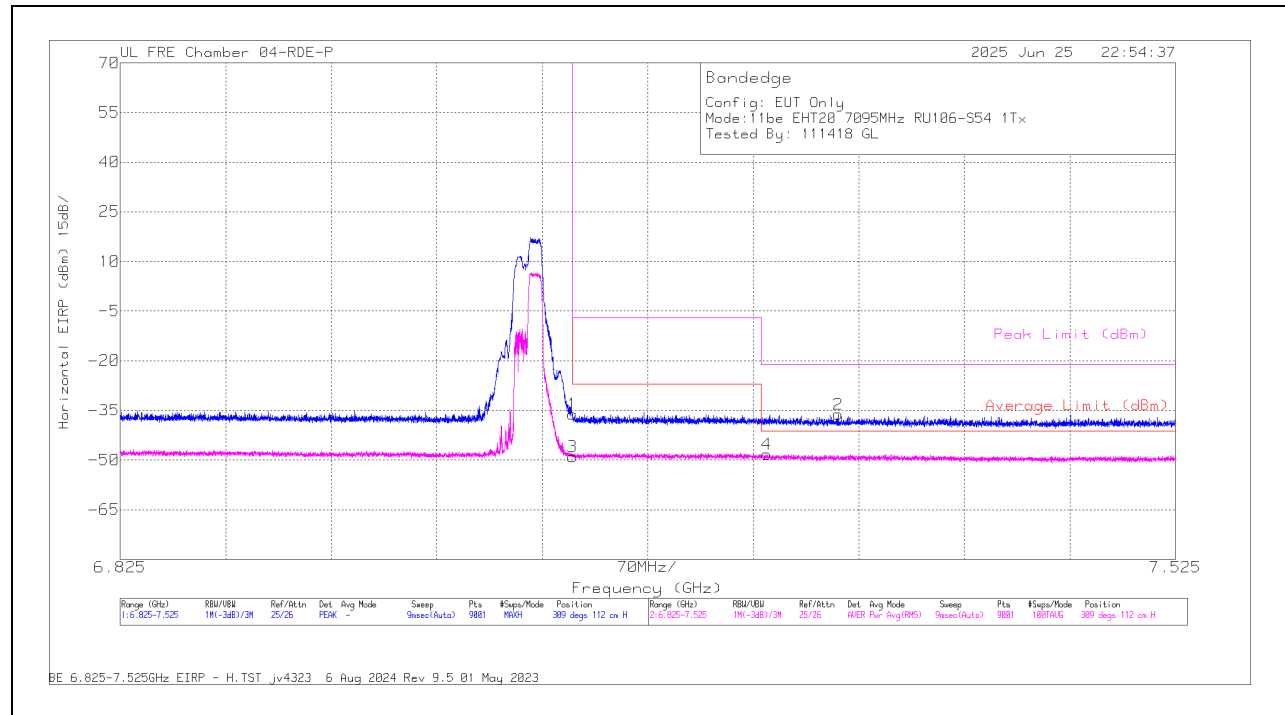
1.1.10. 802.11be SISO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 106 / Index 54)	7095	6	7.125	-47.86	Pk	35.7	11.8	0	-35.85	-36.21	-	-	-7	-29.21	309	112	H
			7.125	-60.63	RMS	35.7	11.8	0	-35.85	-48.98	-27	-21.98	-	-	309	112	H
			* 7.253946	-59.62	RMS	35.7	11.8	0	-36.14	-48.26	-41.2	-7.06	-	-	309	112	H
			* 7.301235	-47.45	Pk	35.6	11.8	0	-36.18	-36.23	-	-	-21.2	-15.03	309	112	H
			7.125	-49.99	Pk	35.7	11.8	0	-35.85	-38.34	-	-	-7	-31.34	334	109	V
			7.125	-60.1	RMS	35.7	11.8	0	-35.85	-48.45	-27	-21.45	-	-	334	109	V
		5	* 7.252312	-59.66	RMS	35.7	11.8	0	-36.17	-48.33	-41.2	-7.13	-	-	334	109	V
			* 7.263901	-47.55	Pk	35.7	11.8	0	-36.2	-36.25	-	-	-21.2	-15.05	334	109	V
			* 7.355368	-49.59	Pk	35.5	11.8	0	-32.49	-34.78	-	-	-21.2	-13.58	131	199	H
			* 7.516913	-61.68	RMS	35.6	11.8	0	-32.46	-46.74	-41.2	-5.54	-	-	131	199	H
			7.125	-52.24	Pk	35.6	11.8	0	-33.02	-37.86	-	-	-7	-30.86	131	199	H
			7.125	-62.6	RMS	35.6	11.8	0	-33.02	-48.22	-27	-21.22	-	-	131	199	H
			* 7.428713	-49.28	Pk	35.5	11.8	0	-32.38	-34.36	-	-	-21.2	-13.16	113	120	V
			* 7.518391	-61.43	RMS	35.6	11.8	0	-32.51	-46.54	-41.2	-5.34	-	-	113	120	V
			7.125	-52.39	Pk	35.6	11.8	0	-33.02	-38.01	-	-	-7	-31.01	113	120	V
			7.125	-62.89	RMS	35.6	11.8	0	-33.02	-48.51	-27	-21.51	-	-	113	120	V
EHT40 (RU 52 / Index 44)	7085	6	* 7.499413	-49.48	Pk	35.6	11.8	0	-32.54	-34.62	-	-	-21.2	-13.42	28	119	H
			* 7.509524	-61.8	RMS	35.6	11.8	0.1	-32.38	-46.68	-41.2	-5.48	-	-	28	119	H
			7.125	-49.8	Pk	35.6	11.8	0	-33.02	-35.42	-	-	-7	-28.42	28	119	H
			7.125	-62.24	RMS	35.6	11.8	0.1	-33.02	-47.76	-27	-20.76	-	-	28	119	H
			* 7.258223	-49.36	Pk	35.6	11.8	0	-32.77	-34.73	-	-	-21.2	-13.53	55	139	V
			* 7.490857	-61.73	RMS	35.5	11.8	0.1	-32.43	-46.76	-41.2	-5.56	-	-	55	139	V
		5	7.125	-52.12	Pk	35.6	11.8	0	-33.02	-37.74	-	-	-7	-30.74	55	139	V
			7.125	-62.64	RMS	35.6	11.8	0.1	-33.02	-48.16	-27	-21.16	-	-	55	139	V
			* 7.455935	-49.58	Pk	35.6	11.8	0	-32.48	-34.66	-	-	-21.2	-13.46	36	314	H
			* 7.51458	-61.76	RMS	35.7	11.8	0.1	-32.4	-46.56	-41.2	-5.36	-	-	36	314	H
			7.125	-52.4	Pk	35.6	11.8	0	-33.02	-38.02	-	-	-7	-31.02	36	314	H
			7.125	-62.88	RMS	35.6	11.8	0.1	-33.02	-48.4	-27	-21.4	-	-	36	314	H
			* 7.433846	-49.66	Pk	35.6	11.8	0	-32.45	-34.71	-	-	-21.2	-13.51	50	289	V
			* 7.442091	-61.82	RMS	35.6	11.8	0.1	-32.31	-46.63	-41.2	-5.43	-	-	50	289	V
			7.125	-51.79	Pk	35.6	11.8	0	-33.02	-37.41	-	-	-7	-30.41	50	289	V
			7.125	-62.79	RMS	35.6	11.8	0.1	-33.02	-48.31	-27	-21.31	-	-	50	289	V
EHT80 (RU 106 / Index 60)	7025	6	7.125	-50.26	Pk	35.6	11.8	0	-37.18	-40.04	-	-	-7	-33.04	14	113	H
			7.125	-60.28	RMS	35.6	11.8	0	-37.18	-50.06	-27	-23.06	-	-	14	113	H
			* 7.288479	-59.41	RMS	35.6	11.8	0	-37.61	-49.62	-41.2	-8.42	-	-	14	113	H
			* 7.44248	-47.79	Pk	35.6	11.8	0	-37.49	-37.88	-	-	-21.2	-16.68	14	113	H
			7.125	-50.26	Pk	35.6	11.8	0	-37.18	-40.04	-	-	-7	-33.04	354	108	V
			7.125	-61.11	RMS	35.6	11.8	0	-37.18	-50.89	-27	-23.89	-	-	354	108	V
		5	* 7.401257	-47.47	Pk	35.6	11.8	0	-37.58	-37.65	-	-	-21.2	-16.45	354	108	V
			* 7.512169	-59.32	RMS	35.6	11.8	0	-37.4	-49.32	-41.2	-8.12	-	-	354	108	V
			* 7.519713	-49.58	Pk	35.7	11.8	0	-32.53	-34.61	-	-	-21.2	-13.41	137	227	H
			* 7.474991	-61.62	RMS	35.6	11.8	0	-32.52	-46.74	-41.2	-5.54	-	-	137	227	H
			7.125	-51.93	Pk	35.6	11.8	0	-33.02	-37.55	-	-	-7	-30.55	137	227	H
			7.125	-63.12	RMS	35.6	11.8	0	-33.02	-48.74	-27	-21.74	-	-	137	227	H
			* 7.270512	-49.43	Pk	35.6	11.8	0	-32.59	-34.62	-	-	-21.2	-13.42	67	237	V
			* 7.486035	-61.58	RMS	35.6	11.8	0	-32.35	-46.53	-41.2	-5.33	-	-	67	237	V
			7.125	-52.32	Pk	35.6	11.8	0	-33.02	-37.94	-	-	-7	-30.94	67	237	V
			7.125	-62.76	RMS	35.6	11.8	0	-33.02	-48.38	-27	-21.38	-	-	67	237	V
EHT160 (RU 52 / Index 552)	6985	6	* 7.512946	-49.38	Pk	35.6	11.8	0	-32.38	-34.36	-	-	-21.2	-13.16	15	177	H
			* 7.457024	-61.55	RMS	35.5	11.8	0	-32.46	-46.71	-41.2	-5.51	-	-	15	177	H
			7.125	-51.82	Pk	35.6	11.8	0	-33.02	-37.44	-	-	-7	-30.44	15	177	H
			7.125	-62.4	RMS	35.6	11.8	0	-33.02	-48.02	-27	-21.02	-	-	15	177	H
			* 7.507813	-48.86	Pk	35.6	11.8	0	-32.43	-33.89	-	-	-21.2	-12.69	69	217	V
			* 7.521269	-61.58	RMS	35.6	11.8	0	-32.55	-46.73	-41.2	-5.53	-	-	69	217	V
		5	7.125	-51.98	Pk	35.6	11.8	0	-33.02	-37.6	-	-	-7	-30.6	69	217	V
			7.125	-62.66	RMS	35.6	11.8	0	-33.02	-48.28	-27	-21.28	-	-	69	217	V
			* 7.481524	-49.9	Pk	35.6	11.8	0	-32.4	-34.9	-	-	-21.2	-13.7	141	100	H
			* 7.516369	-61.85	RMS	35.7	11.8	0	-32.44	-46.79	-41.2	-5.59	-	-	141	100	H
			7.125	-51.71	Pk	35.6	11.8	0	-33.02	-37.33	-	-	-7	-30.33	141	100	H
			7.125	-62.79	RMS	35.6	11.8	0	-33.02	-48.41	-27	-21.41	-	-	141	100	H
			* 7.331879	-49.03	Pk	35.6	11.8	0	-32.53	-34.16	-	-	-21.2	-12.96	140	106	V
			* 7.521969	-61.77	RMS	35.7	11.8	0	-32.54	-46.81	-41.2	-5.61	-	-	140	106	V
			7.125	-51.93	Pk	35.6	11.8	0	-33.02	-37.55	-	-	-7	-30.55	140	106	V
			7.125	-63.05	RMS	35.6	11.8	0	-33.02	-48.67	-27	-21.67	-	-	140	106	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1TX Antenna 6 MODE: 106-Tone, RU Index 54**BANDEDGE (HIGH CHANNEL / 7095MHz)****HORIZONTAL RESULT**

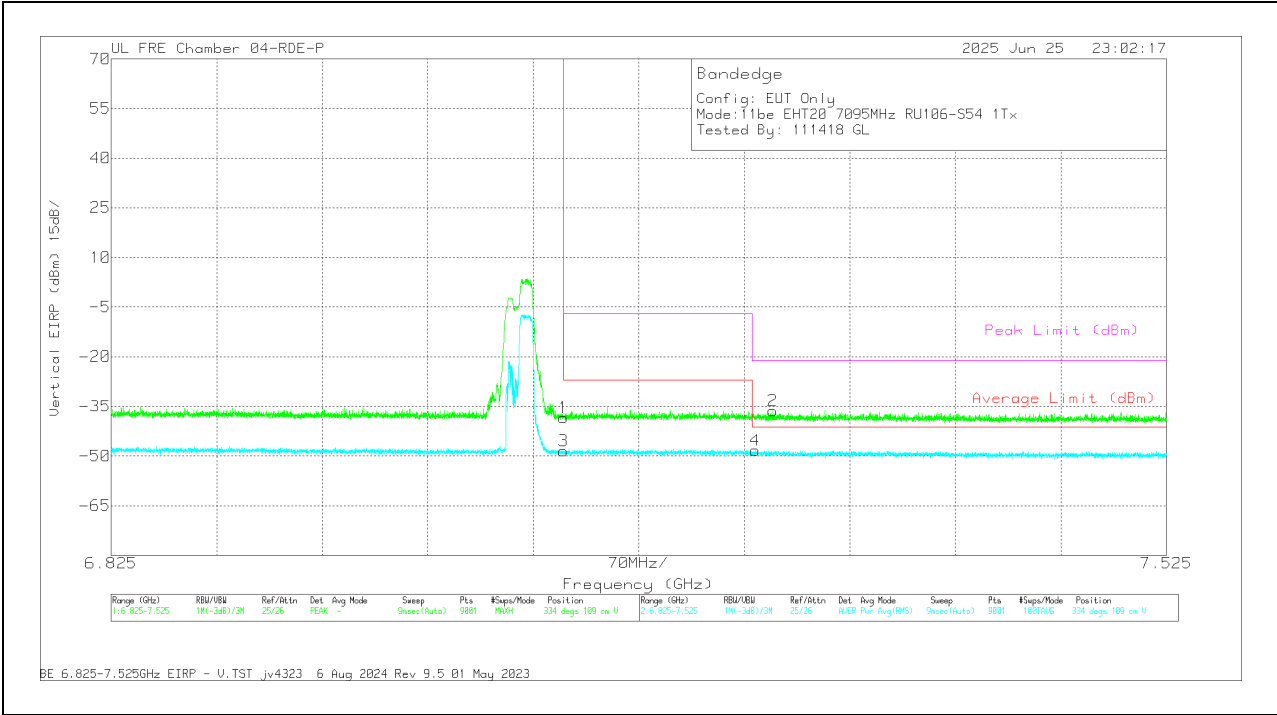
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	200897 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-47.86	Pk	35.7	11.8	0	-35.85	-36.21	-	-	-7	-29.21	309	112	H
3	7.125	-60.63	RMS	35.7	11.8	0	-35.85	-48.98	-27	-21.98	-	-	309	112	H
4	* 7.253946	-59.62	RMS	35.7	11.8	0	-36.14	-48.26	-41.2	-7.06	-	-	309	112	H
2	* 7.301235	-47.45	Pk	35.6	11.8	0	-36.18	-36.23	-	-	-21.2	-15.03	309	112	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT



Marker	Frequency (GHz)	Meter Reading (dBm)	Det	200897 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-49.99	Pk	35.7	11.8	0	-35.85	-38.34	-	-	-7	-31.34	334	109	V
3	7.125	-60.1	RMS	35.7	11.8	0	-35.85	-48.45	-27	-21.45	-	-	334	109	V
4	* 7.252312	-59.66	RMS	35.7	11.8	0	-36.17	-48.33	-41.2	-7.13	-	-	334	109	V
2	* 7.263901	-47.55	Pk	35.7	11.8	0	-36.2	-36.25	-	-	-21.2	-15.05	334	109	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

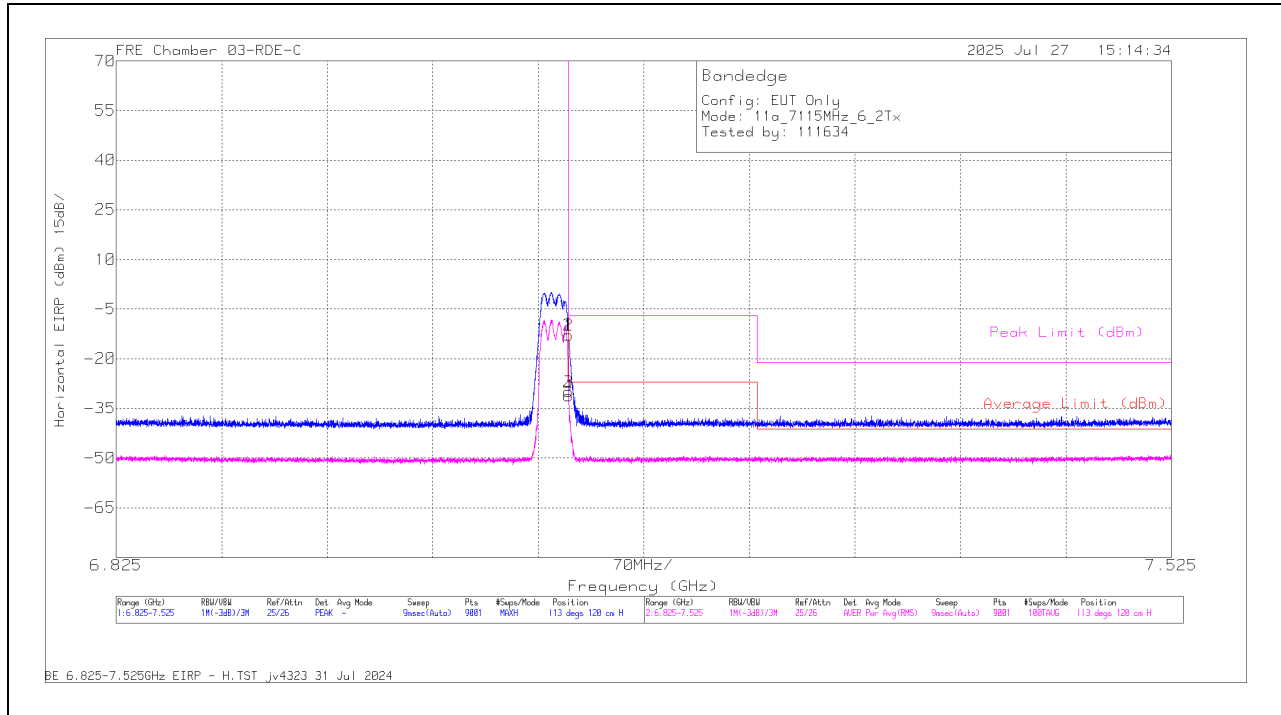
1.1.11. 802.11a MIMO MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a	7115	6+5	7.125	-24.27	Pk	35.5	11.8	0	-35.98	-12.95	-	-	-7	-5.95	113	120	H
			7.125	-41.3	RMS	35.5	11.8	0	-35.98	-29.98	-27	-2.98	-	-	113	120	H
			7.125068	-42.56	RMS	35.5	11.8	0	-35.98	-31.24	-27	-4.24	-	-	113	120	H
			7.125145	-24.2	Pk	35.5	11.8	0	-35.98	-12.88	-	-	-7	-5.88	113	120	H
			* 7.523369	-60.6	RMS	35.6	11.8	0	-35.87	-49.07	-41.2	-7.87	-	-	163	109	V
			7.125	-32.46	Pk	35.5	11.8	0	-35.98	-21.14	-	-	-7	-14.14	163	109	V
			7.125	-47.97	RMS	35.5	11.8	0	-35.98	-36.65	-27	-9.65	-	-	163	109	V
			7.125068	-32.03	Pk	35.5	11.8	0	-35.98	-20.71	-	-	-7	-13.71	163	109	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

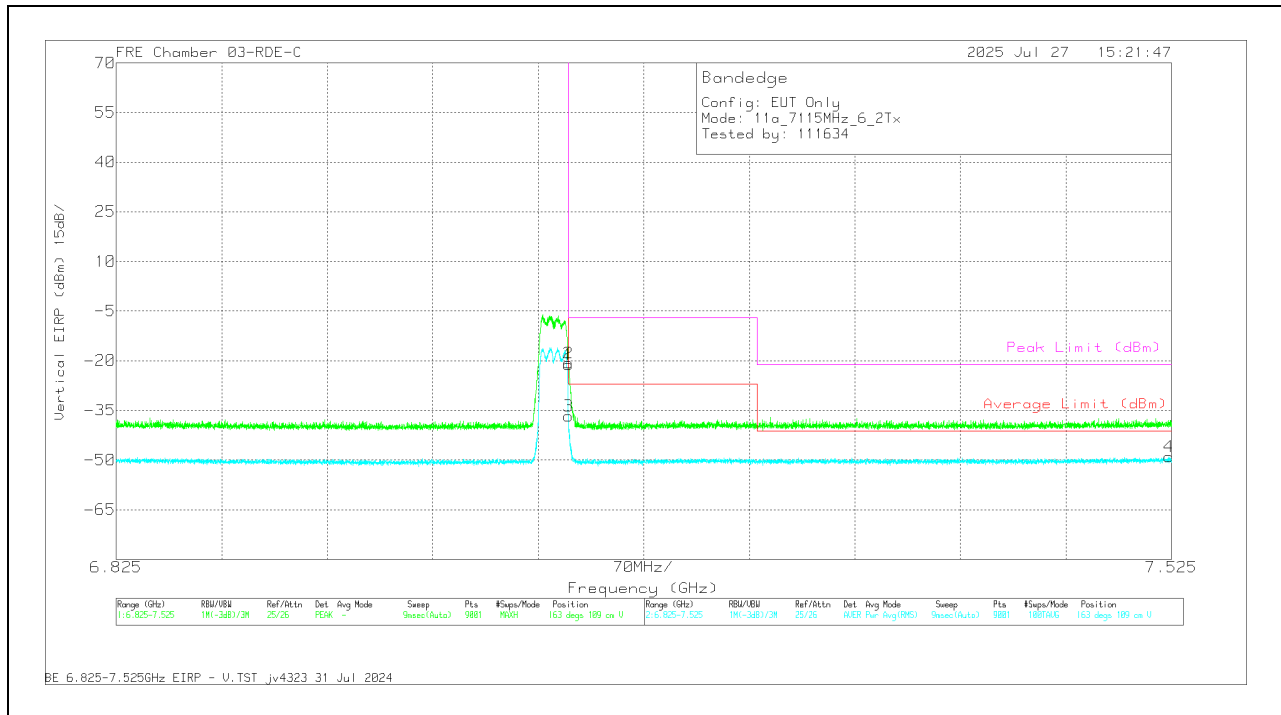
2TX Antenna 6+5 MODE: 11a**BANDEDGE (HIGH CHANNEL / 7115MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-24.27	Pk	35.5	11.8	0	-35.98	-12.95	-	-	-7	-5.95	113	120	H
3	7.125	-41.3	RMS	35.5	11.8	0	-35.98	-29.98	-27	-2.98	-	-	113	120	H
4	7.125068	-42.56	RMS	35.5	11.8	0	-35.98	-31.24	-27	-4.24	-	-	113	120	H
2	7.125145	-24.2	Pk	35.5	11.8	0	-35.98	-12.88	-	-	-7	-5.88	113	120	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dBm)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 7.523369	-60.6	RMS	35.6	11.8	0	-35.87	-49.07	-41.2	-7.87	-	-	163	109	V
1	7.125	-32.46	Pk	35.5	11.8	0	-35.98	-21.14	-	-	-7	-14.14	163	109	V
3	7.125	-47.97	RMS	35.5	11.8	0	-35.98	-36.65	-27	-9.65	-	-	163	109	V
2	7.125068	-32.03	Pk	35.5	11.8	0	-35.98	-20.71	-	-	-7	-13.71	163	109	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.12. 802.11be MIMO SU MODE IN UNII-8 BAND – BANDEDGE

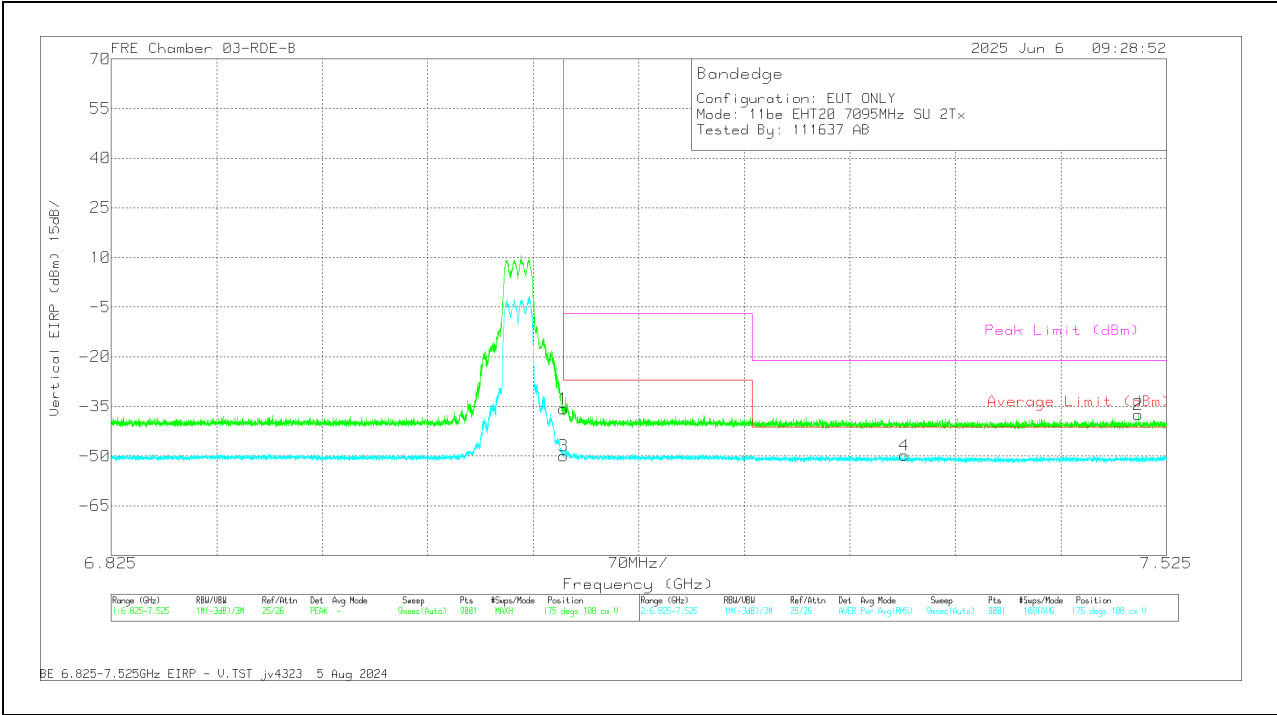
UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	7095	6 + 5	* 7.300379	-47.36	Pk	35.6	11.8	0	-38.3	-38.26	-	-	-21.2	-17.06	100	116	H
			* 7.274012	-59.35	RMS	35.6	11.8	0	-38.2	-50.15	-41.2	-8.95	-	-	100	116	H
			7.125	-34.55	Pk	35.7	11.8	0	-38.3	-25.35	-	-	-7	-18.35	100	116	H
			7.125	-51.8	RMS	35.7	11.8	0	-38.3	-42.6	-27	-15.6	-	-	100	116	H
			* 7.506258	-46.42	Pk	35.7	11.8	0	-38.57	-37.49	-	-	-21.2	-16.29	175	108	V
			* 7.351013	-59.24	RMS	35.6	11.8	0	-38.4	-50.24	-41.2	-9.04	-	-	175	108	V
			7.125	-44.96	Pk	35.7	11.8	0	-38.3	-35.76	-	-	-7	-28.76	175	108	V
			7.125	-59.5	RMS	35.7	11.8	0	-38.3	-50.3	-27	-23.3	-	-	175	108	V
EHT40 (SU Mode)	7085	6 + 5	7.125	-26.71	Pk	35.7	11.8	0	-38.3	-17.51	-	-	-7	-10.51	352	124	H
			7.125	-43.54	RMS	35.7	11.8	0	-38.3	-34.34	-27	-7.34	-	-	352	124	H
			7.128179	-23.83	Pk	35.7	11.8	0	-38.28	-14.61	-	-	-7	-7.61	352	124	H
			7.12849	-40.55	RMS	35.7	11.8	0	-38.25	-31.3	-27	-4.3	-	-	352	124	H
			* 7.361902	-59.1	RMS	35.6	11.8	0	-38.5	-50.2	-41.2	-9	-	-	104	111	V
			7.125	-32.54	Pk	35.7	11.8	0	-38.3	-23.34	-	-	-7	-16.34	104	111	V
			7.125	-49.72	RMS	35.7	11.8	0	-38.3	-40.52	-27	-13.52	-	-	104	111	V
			7.125145	-32.11	Pk	35.7	11.8	0	-38.3	-22.91	-	-	-7	-15.91	104	111	V
EHT80 (SU Mode)	7025	6 + 5	7.125	-31.51	Pk	35.8	11.8	0	-33.4	-17.31	-	-	-7	-10.31	215	102	H
			7.128256	-29.39	Pk	35.8	11.8	0	-33.4	-15.19	-	-	-7	-8.19	215	102	H
			7.125	-47.89	RMS	35.8	11.8	0	-33.4	-33.69	-27	-6.69	-	-	215	102	H
			* 7.429491	-61.28	RMS	35.7	11.8	0	-32.9	-46.68	-41.2	-5.48	-	-	215	102	H
			7.125	-31.51	Pk	35.8	11.8	0	-33.4	-17.31	-	-	-7	-10.31	215	102	H
			7.128256	-29.39	Pk	35.8	11.8	0	-33.4	-15.19	-	-	-7	-8.19	215	102	H
			7.125	-47.89	RMS	35.8	11.8	0	-33.4	-33.69	-27	-6.69	-	-	215	102	H
			* 7.429491	-61.28	RMS	35.7	11.8	0	-32.9	-46.68	-41.2	-5.48	-	-	215	102	H
EHT160 (SU Mode)	6985	6 + 5	7.125	-38.17	Pk	35.6	11.8	0	-37.44	-28.21	-	-	-7	-21.21	154	101	H
			7.125	-50.15	RMS	35.6	11.8	0.14	-37.44	-40.05	-27	-13.05	-	-	154	101	H
			* 7.251768	-58.87	RMS	35.6	11.8	0.14	-37.48	-48.81	-41.2	-7.61	-	-	154	101	H
			* 7.303101	-46.74	Pk	35.6	11.8	0	-37.79	-37.13	-	-	-21.2	-15.93	154	101	H
			7.125	-43.64	Pk	35.6	11.8	0	-37.44	-33.68	-	-	-7	-26.68	190	231	V
			7.125	-54.85	RMS	35.6	11.8	0.14	-37.44	-44.75	-27	-17.75	-	-	190	231	V
			* 7.263668	-47.44	Pk	35.6	11.8	0	-37.45	-37.49	-	-	-21.2	-16.29	190	231	V
			* 7.510613	-59.36	RMS	35.6	11.8	0.14	-37.59	-49.41	-41.2	-8.21	-	-	190	231	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT



Marker	Frequency (GHz)	Motor Reading (dBm)	Det	223084 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 7.506258	-46.42	PK	35.7	11.8	0	-38.57	-37.49	-	-	-21.2	-16.29	175	108	V
4	* 7.351013	-59.24	RMS	35.6	11.8	0	-38.4	-50.24	-41.2	-9.04	-	-	175	108	V
1	7.125	-44.96	PK	35.7	11.8	0	-38.3	-35.76	-	-	-7	-28.76	175	108	V
3	7.125	-59.5	RMS	35.7	11.8	0	-38.3	-50.3	-27	-23.3	-	-	175	108	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

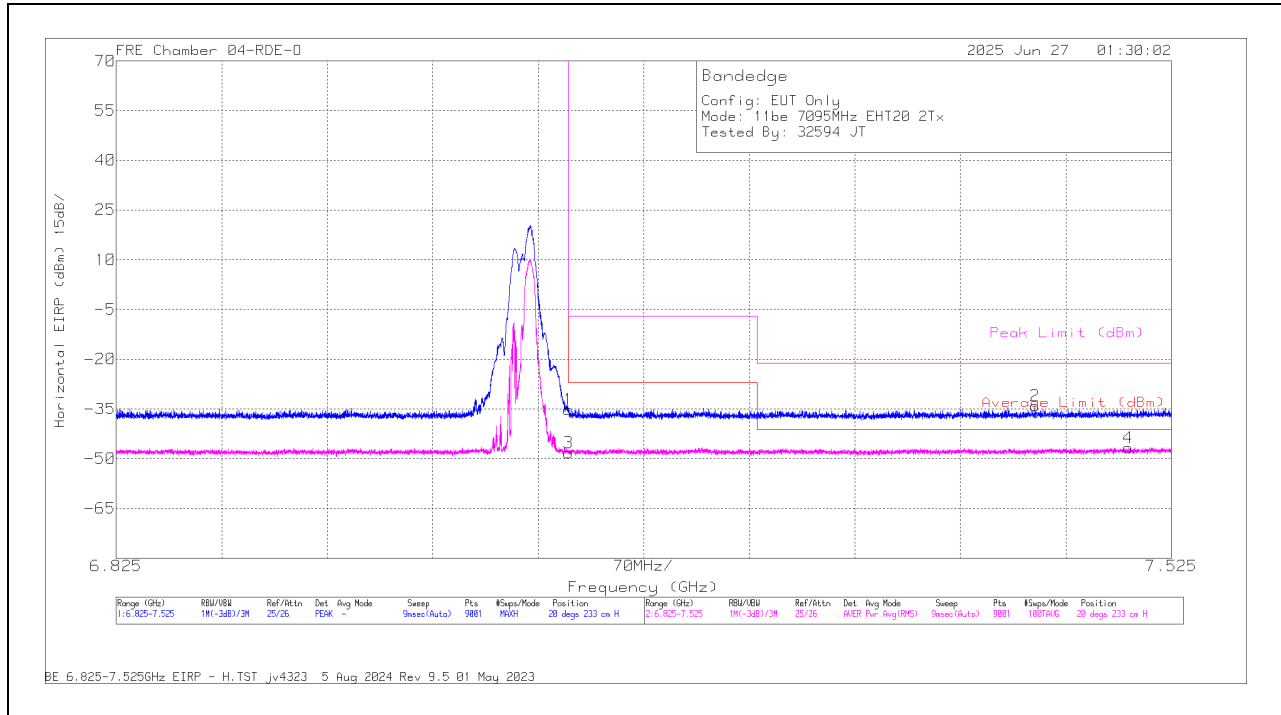
1.1.13. 802.11be MIMO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 106 / Index 54)	7095	6 + 5	* 7.434546	-48.93	Pk	35.5	11.8	0	-32.46	-34.09	-	-	-21.2	-12.89	20	233	H
			* 7.496302	-61.58	RMS	35.6	11.8	0	-32.53	-46.71	-41.2	-5.51	-	-	20	233	H
			7.125	-49.49	Pk	35.6	11.8	0	-33.02	-35.11	-	-	-7	-28.11	20	233	H
			7.125	-62.64	RMS	35.6	11.8	0	-33.02	-48.26	-27	-21.26	-	-	20	233	H
			* 7.422646	-49.89	Pk	35.5	11.8	0	-32.51	-35.1	-	-	-21.2	-13.9	88	360	V
			* 7.512558	-61.6	RMS	35.6	11.8	0	-32.37	-46.57	-41.2	-5.37	-	-	88	360	V
			7.125	-52.04	Pk	35.6	11.8	0	-33.02	-37.66	-	-	-7	-30.66	88	360	V
EHT40 (RU 52 / Index 44)	7085	6 + 5	7.125	-62.54	RMS	35.6	11.8	0	-33.02	-48.16	-27	-21.16	-	-	88	360	V
			* 7.479035	-49.45	Pk	35.6	11.8	0	-32.48	-34.53	-	-	-21.2	-13.33	320	118	H
			* 7.514191	-61.73	RMS	35.6	11.8	0.1	-32.39	-46.62	-41.2	-5.42	-	-	320	118	H
			7.125	-49.99	Pk	35.6	11.8	0	-33.02	-35.61	-	-	-7	-28.61	320	118	H
			7.125	-62.58	RMS	35.6	11.8	0.1	-33.02	-48.1	-27	-21.1	-	-	320	118	H
			* 7.344635	-49.31	Pk	35.6	11.8	0	-32.53	-34.44	-	-	-21.2	-13.24	290	145	V
			* 7.447068	-61.6	RMS	35.6	11.8	0.1	-32.37	-46.47	-41.2	-5.27	-	-	290	145	V
EHT80 (RU 106 / Index 60)	7025	6 + 5	7.125	-52.01	Pk	35.6	11.8	0	-33.02	-37.63	-	-	-7	-30.63	290	145	V
			7.125	-62.82	RMS	35.6	11.8	0.1	-33.02	-48.34	-27	-21.34	-	-	290	145	V
			* 7.479969	-49.61	Pk	35.6	11.8	0	-32.45	-34.66	-	-	-21.2	-13.46	153	349	H
			* 7.514813	-61.74	RMS	35.7	11.8	0	-32.4	-46.64	-41.2	-5.44	-	-	153	349	H
			7.125	-51.76	Pk	35.6	11.8	0	-33.02	-37.38	-	-	-7	-30.38	153	349	H
			7.125	-62.91	RMS	35.6	11.8	0	-33.02	-48.53	-27	-21.53	-	-	153	349	H
			* 7.434624	-49.13	Pk	35.6	11.8	0	-32.46	-34.19	-	-	-21.2	-12.99	73	227	V
EHT160 (RU 52 / Index 552)	6985	6 + 5	* 7.485257	-61.63	RMS	35.6	11.8	0	-32.35	-46.58	-41.2	-5.38	-	-	73	227	V
			7.125	-51.28	Pk	35.6	11.8	0	-33.02	-36.9	-	-	-7	-29.9	73	227	V
			7.125	-62.71	RMS	35.6	11.8	0	-33.02	-48.33	-27	-21.33	-	-	73	227	V
			* 7.515124	-49.74	Pk	35.7	11.8	0	-32.4	-34.64	-	-	-21.2	-13.44	59	265	H
			* 7.479035	-61.61	RMS	35.6	11.8	0	-32.48	-46.69	-41.2	-5.49	-	-	59	265	H
			7.125	-50.96	Pk	35.6	11.8	0	-33.02	-36.58	-	-	-7	-29.58	59	265	H
			7.125	-62.65	RMS	35.6	11.8	0	-33.02	-48.27	-27	-21.27	-	-	59	265	H
			* 7.512635	-49.88	Pk	35.6	11.8	0	-32.37	-34.85	-	-	-21.2	-13.65	69	127	V
			* 7.512713	-61.62	RMS	35.6	11.8	0	-32.37	-46.59	-41.2	-5.39	-	-	69	127	V
			7.125	-51.79	Pk	35.6	11.8	0	-33.02	-37.41	-	-	-7	-30.41	69	127	V
			7.125	-62.37	RMS	35.6	11.8	0	-33.02	-47.99	-27	-20.99	-	-	69	127	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

2TX Antenna 6 + Antenna 5 OFDMA MODE: 106-Tone, RU Index 54**BANDEDGE (HIGH CHANNEL / 7095MHz)****HORIZONTAL RESULT**

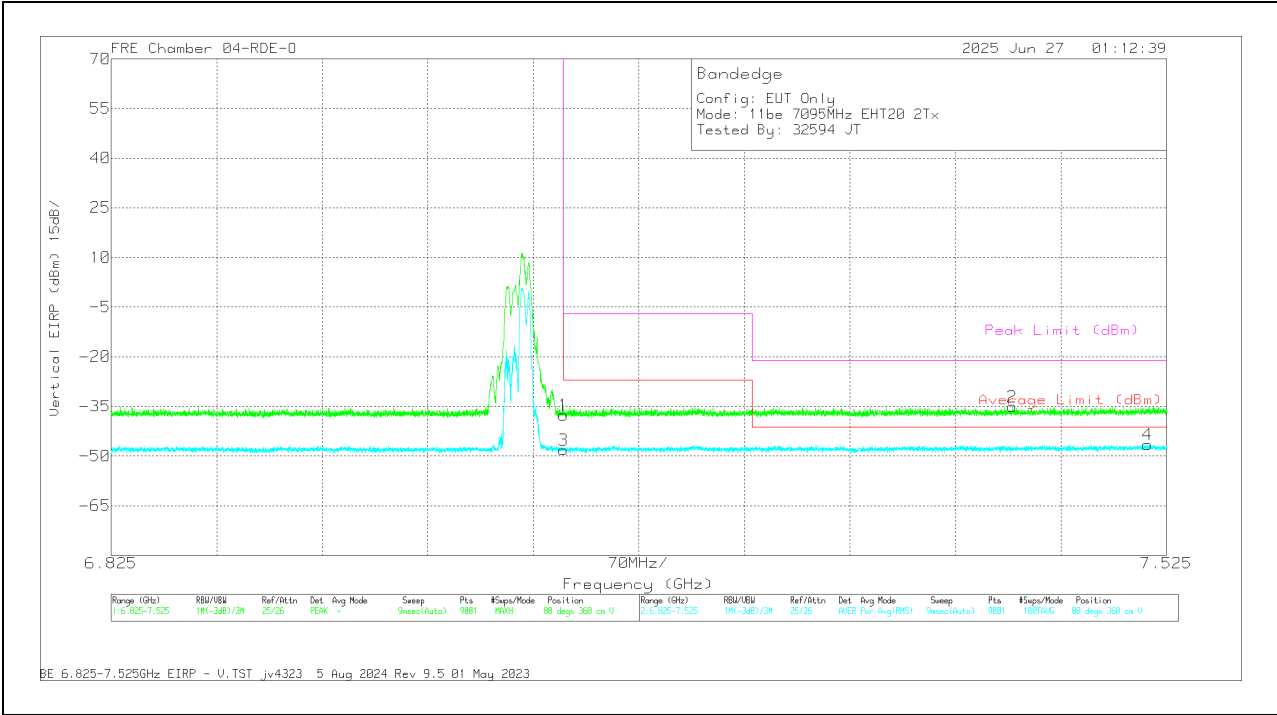
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 80402 (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 7.434546	-48.93	Pk	35.5	11.8	0	-32.46	-34.09	-	-	-21.2	-12.89	20	233	H
4	* 7.496302	-61.58	RMS	35.6	11.8	0	-32.53	-46.71	-41.2	-5.51	-	-	20	233	H
1	7.125	-49.49	Pk	35.6	11.8	0	-33.02	-35.11	-	-	-7	-28.11	20	233	H
3	7.125	-62.64	RMS	35.6	11.8	0	-33.02	-48.26	-27	-21.26	-	-	20	233	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT



Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 80402 (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 7.422646	-49.89	Pk	35.5	11.8	0	-32.51	-35.1	-	-	-21.2	-13.9	88	360	V
4	* 7.512558	-61.6	RMS	35.6	11.8	0	-32.37	-46.57	-41.2	-5.37	-	-	88	360	V
1	7.125	-52.04	Pk	35.6	11.8	0	-33.02	-37.66	-	-	-7	-30.66	88	360	V
3	7.125	-62.54	RMS	35.6	11.8	0	-33.02	-48.16	-27	-21.16	-	-	88	360	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

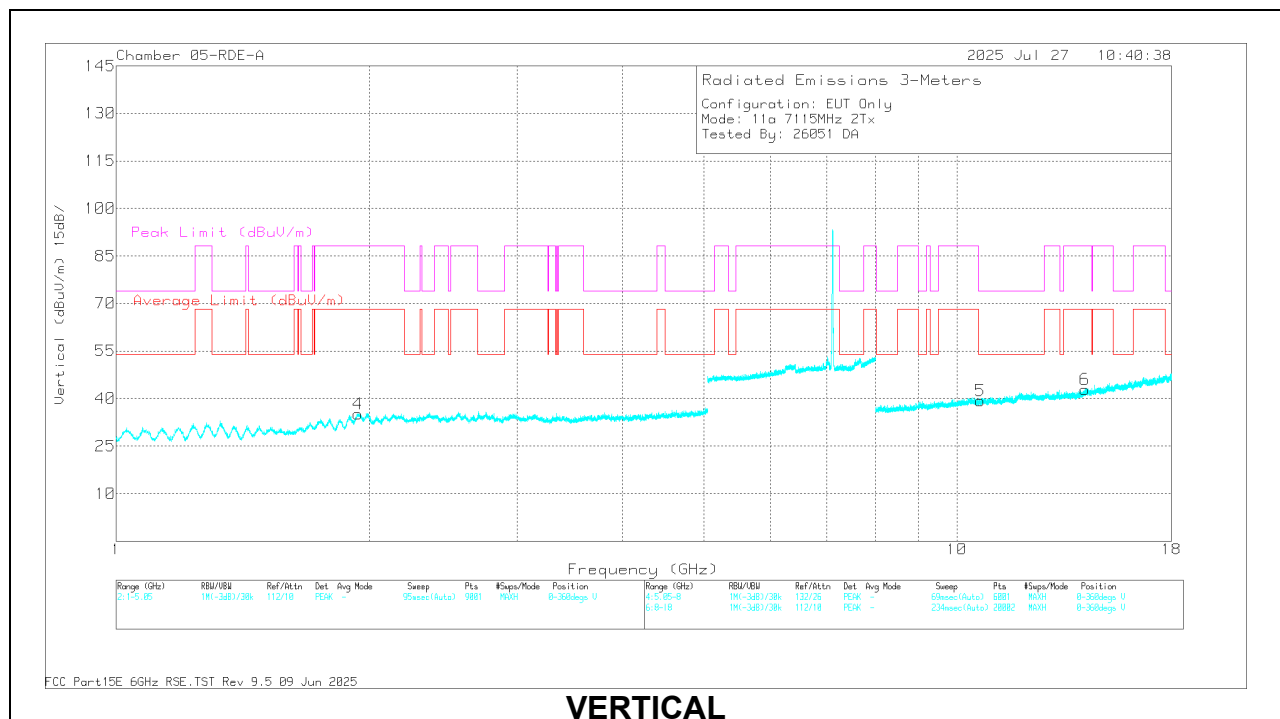
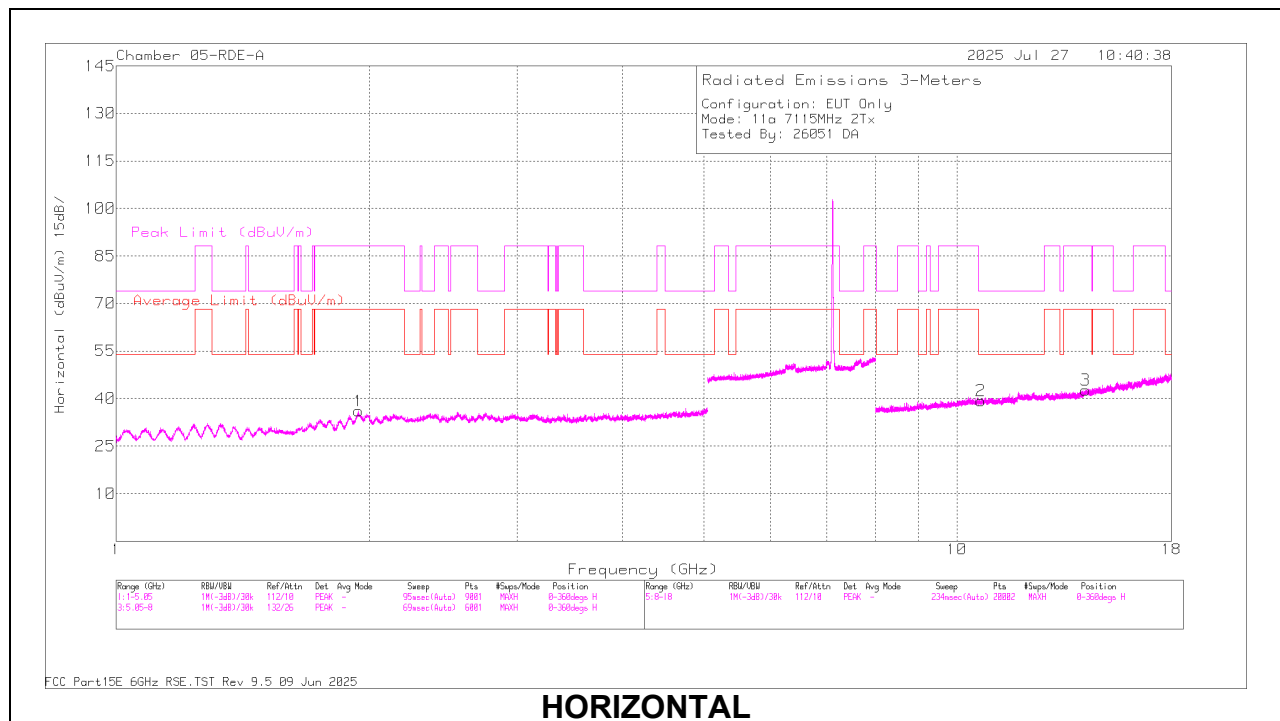
1.1.14. 802.11a MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS**20MHz**

UNII-8 (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filt/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a mode	7115	6 + 5	* 10.671235	54.51	PK-U	38.2	-43.2	0	49.51	-	-	74	-24.49	248	128	H
			* 10.671391	42.54	ADR	38.2	-43.2	0	37.54	54	-16.46	-	-	248	128	H
			* 10.679829	54.01	PK-U	38.2	-43.22	0	48.99	-	-	74	-25.01	194	157	V
			* 10.658384	42.65	ADR	38.2	-43.2	0	37.65	54	-16.35	-	-	194	157	V
			1.934225	62.54	PK-U	31.7	-48.68	0	45.56	-	-	88.2	-42.64	271	263	H
			1.93967	50.65	ADR	31.8	-48.57	0	33.88	68.2	-34.32	-	-	85	325	V
			1.943696	50.7	ADR	31.8	-48.6	0	33.9	68.2	-34.3	-	-	271	263	H
			1.945691	62.44	PK-U	31.8	-48.6	0	45.64	-	-	88.2	-42.56	85	325	V
			14.201616	41.94	ADR	39.3	-40.64	0	40.6	68.2	-27.6	-	-	290	347	V
			14.20494	42.19	ADR	39.3	-40.7	0	40.79	68.2	-27.41	-	-	265	238	H
			14.212699	53.71	PK-U	39.3	-40.6	0	52.41	-	-	88.2	-35.79	290	347	V
			14.235809	54	PK-U	39.4	-40.54	0	52.86	-	-	88.2	-35.34	265	238	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (7115MHz)

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	226671 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 10.671235	54.51	PK-U	38.2	0	-43.2	49.51	-	-	74	-24.49	248	128	H
* 10.671391	42.54	ADR	38.2	0	-43.2	37.54	54	-16.46	-	-	248	128	H
* 10.679629	54.01	PK-U	38.2	0	-43.22	48.99	-	-	74	-25.01	194	157	V
* 10.658384	42.65	ADR	38.2	0	-43.2	37.65	54	-16.35	-	-	194	157	V
1.934225	62.54	PK-U	31.7	0	-48.68	45.56	-	-	88.2	-42.64	271	263	H
1.93967	50.65	ADR	31.8	0	-48.57	33.88	68.2	-34.32	-	-	85	325	V
1.943696	50.7	ADR	31.8	0	-48.6	33.9	68.2	-34.3	-	-	271	263	H
1.945691	62.44	PK-U	31.8	0	-48.6	45.64	-	-	88.2	-42.56	85	325	V
14.201616	41.94	ADR	39.3	0	-40.64	40.6	68.2	-27.6	-	-	290	347	V
14.20494	42.19	ADR	39.3	0	-40.7	40.79	68.2	-27.41	-	-	265	238	H
14.212699	53.71	PK-U	39.3	0	-40.6	52.41	-	-	88.2	-35.79	290	347	V
14.235809	54	PK-U	39.4	0	-40.54	52.86	-	-	88.2	-35.34	265	238	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.15. 802.11be MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS

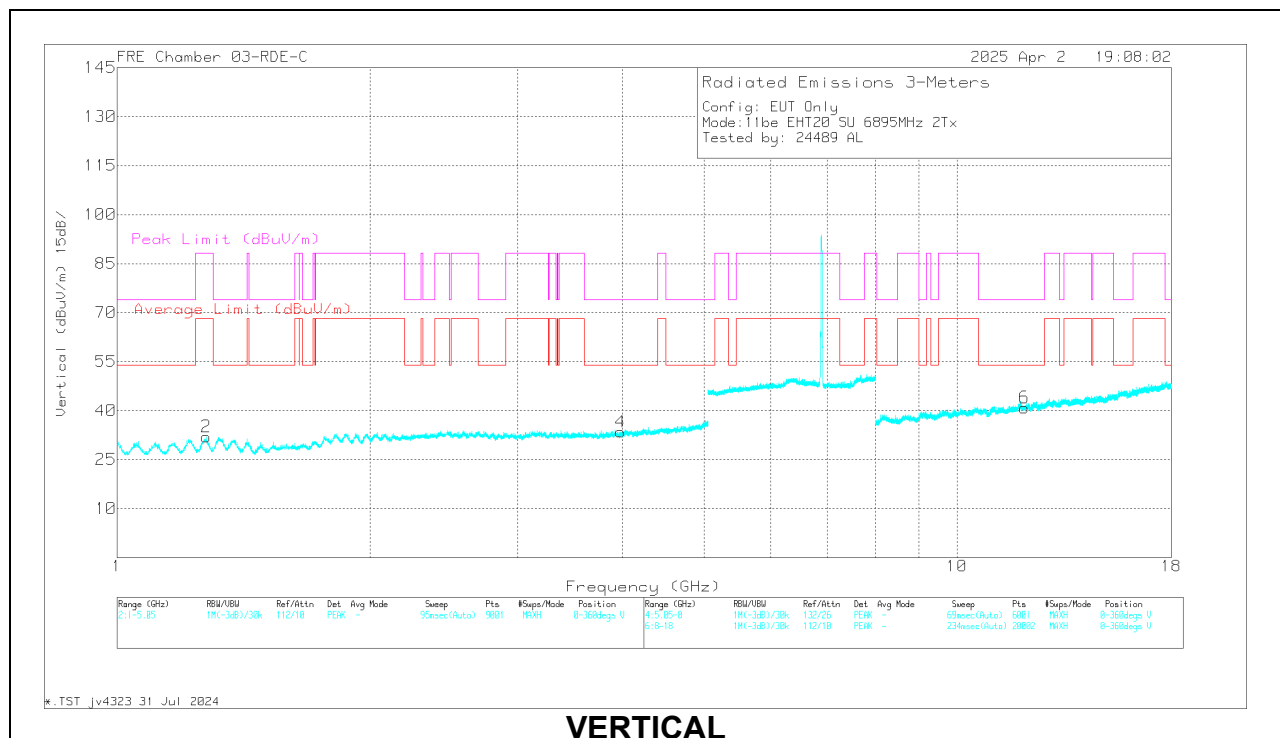
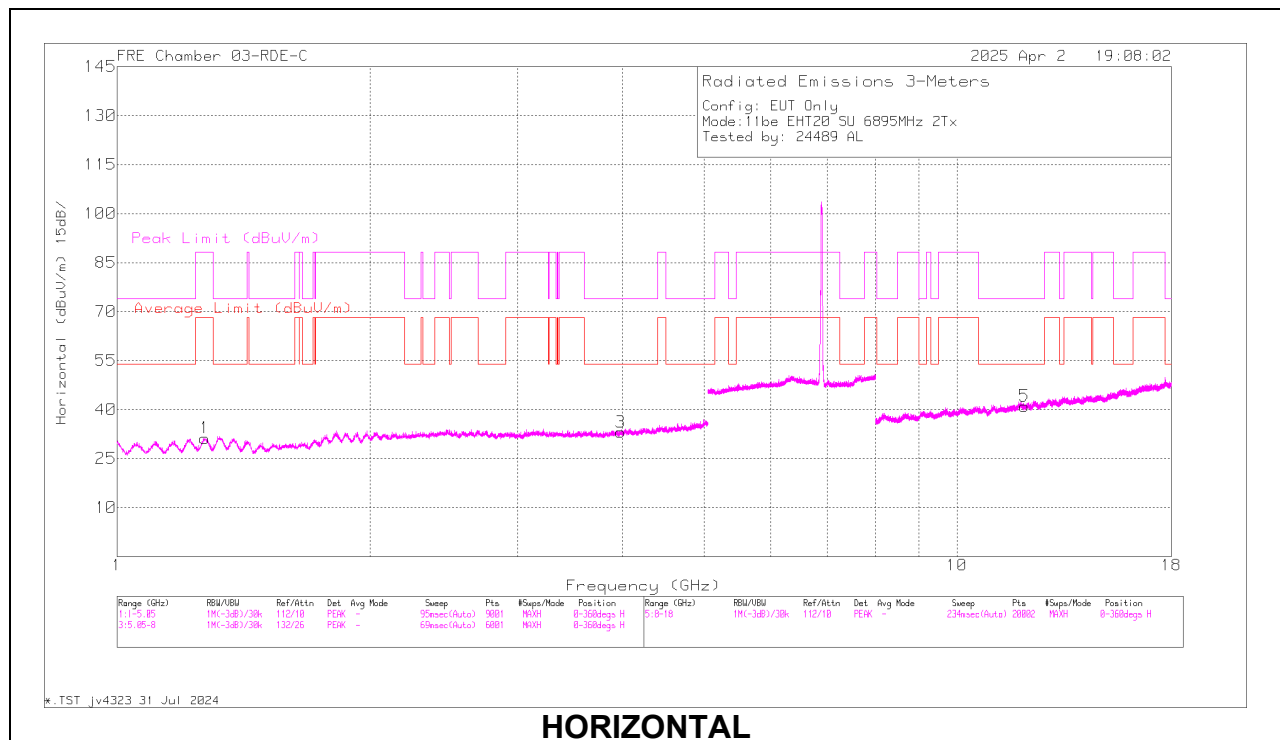
20MHz

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6895	6 + 5	* 1.269984	60.28	PK-U	29.3	-47.9	0	41.68	-	-	88.2	-46.52	0	101	H
			* 1.27265	48.38	ADR	29.3	-47.9	0	29.78	68.2	-38.42	-	-	0	101	H
			* 3.974466	55.97	PK-U	33.4	-45.8	0	43.57	-	-	74	-30.43	0	199	H
			* 3.975176	44.26	ADR	33.4	-45.8	0	31.86	54	-22.14	-	-	0	199	H
			* 1.273992	59.78	PK-U	29.4	-47.8	0	41.38	-	-	88.2	-46.82	0	199	V
			* 1.275349	48.46	ADR	29.4	-47.9	0	29.96	68.2	-38.24	-	-	0	199	V
			* 3.973949	55.56	PK-U	33.4	-45.8	0	43.16	-	-	74	-30.84	0	199	V
			* 3.974599	44.17	ADR	33.4	-45.8	0	31.77	54	-22.23	-	-	0	199	V
			* 12.026809	56.02	PK-U	38.9	-43.3	0	51.62	-	-	74	-22.38	0	101	H
			* 12.024624	44.42	ADR	38.9	-43.36	0	39.96	54	-14.04	-	-	0	101	H
			* 12.02225	56.01	PK-U	38.9	-43.3	0	51.61	-	-	74	-22.39	0	101	V
			* 12.023291	44.45	ADR	38.9	-43.3	0	40.05	54	-13.95	-	-	0	101	V
	6995	6 + 5	* 1.225198	60.58	PK-U	29	-47.92	0	41.66	-	-	74	-32.34	0	200	H
			* 1.224385	48.44	ADR	29	-47.96	0	29.48	54	-24.52	-	-	0	200	H
			* 3.892149	55.62	PK-U	33.2	-45.8	0	43.02	-	-	74	-30.98	0	101	H
			* 3.892038	44.07	ADR	33.2	-45.8	0	31.47	54	-22.53	-	-	0	101	H
			* 1.224298	60.02	PK-U	29	-47.97	0	41.05	-	-	74	-32.95	0	200	V
			* 1.22576	48.46	ADR	29	-47.98	0	29.48	54	-24.52	-	-	0	200	V
			* 3.89424	56.25	PK-U	33.2	-45.8	0	43.65	-	-	74	-30.35	0	200	V
			* 3.8947	44.26	ADR	33.2	-45.8	0	31.66	54	-22.34	-	-	0	200	V
			* 11.51901	55.79	PK-U	38.3	-43.2	0	50.89	-	-	74	-23.11	0	101	H
			* 11.519489	43.85	ADR	38.3	-43.2	0	38.95	54	-15.05	-	-	0	101	H
			* 11.520047	55.61	PK-U	38.3	-43.2	0	50.71	-	-	74	-23.29	0	199	V
			* 11.522655	43.97	ADR	38.3	-43.2	0	39.07	54	-14.93	-	-	0	199	V
	7095	6 + 5	* 1.268248	60.14	PK-U	29.3	-47.88	0	41.56	-	-	88.2	-46.64	0	198	H
			* 1.267738	48.3	ADR	29.3	-47.9	0	29.7	68.2	-38.5	-	-	0	198	H
			* 3.944761	55.25	PK-U	33.4	-45.8	0	42.85	-	-	74	-31.15	0	198	H
			* 3.942523	44.26	ADR	33.4	-45.8	0	31.86	54	-22.14	-	-	0	198	H
			* 1.269692	60.08	PK-U	29.3	-47.87	0	41.51	-	-	88.2	-46.69	0	101	V
			* 1.269172	48.54	ADR	29.3	-47.82	0	30.02	68.2	-38.18	-	-	0	101	V
			* 3.943616	55.29	PK-U	33.4	-45.8	0	42.89	-	-	74	-31.11	0	198	V
			* 3.941525	43.88	ADR	33.4	-45.8	0	31.48	54	-22.52	-	-	0	198	V
			* 11.823902	55.27	PK-U	38.7	-42.71	0	51.26	-	-	74	-22.74	0	101	H
			* 11.824298	43.65	ADR	38.7	-42.7	0	39.65	54	-14.35	-	-	0	101	H
			* 11.822371	55.11	PK-U	38.6	-42.8	0	50.91	-	-	74	-23.09	0	199	V
			* 11.82108	43.63	ADR	38.6	-42.8	0	39.43	54	-14.57	-	-	0	199	V
	11be (Partial RU Mode / Highest PSD)	6895 (106T)	* 2.297223	49.4	ADR	32.1	-50.77	0.1	30.83	54	-23.17	-	-	0	200	H
			* 2.297787	60.69	PK-U	32.1	-50.77	0	42.02	-	-	74	-31.98	0	200	H
			* 2.29931	49.43	ADR	32.1	-50.75	0.1	30.88	54	-23.12	-	-	0	200	V
			* 2.299873	62.03	PK-U	32.1	-50.74	0	43.39	-	-	74	-30.61	0	200	V
			* 3.882139	57.97	PK-U	33.5	-47.73	0	43.74	-	-	74	-30.26	0	101	V
			* 3.882445	46.31	ADR	33.5	-47.74	0.1	32.17	54	-21.83	-	-	0	101	V
			* 3.884814	58.41	PK-U	33.5	-47.84	0	44.07	-	-	74	-29.93	0	101	H
			* 3.886044	46.81	ADR	33.5	-47.84	0.1	32.57	54	-21.43	-	-	0	101	H
			9.90296	46.53	ADR	37	-46.76	0.1	36.87	68.2	-31.33	-	-	0	101	H
			9.904281	58.52	PK-U	37	-46.82	0	48.7	-	-	88.2	-39.5	0	101	H
			9.905118	46.67	ADR	37	-46.95	0.1	36.82	68.2	-31.38	-	-	0	101	V
			9.906011	58.06	PK-U	37	-47	0	48.06	-	-	88.2	-40.14	0	101	V
		6995 (106T)	2.024992	51.2	ADR	31.6	-50.93	0.1	31.97	68.2	-36.23	-	-	0	101	V
			2.026352	64.26	PK-U	31.6	-50.89	0	44.97	-	-	88.2	-43.23	0	101	H
			2.026483	62.89	PK-U	31.6	-50.89	0	43.6	-	-	88.2	-44.6	0	101	V
			2.027934	51.82	ADR	31.6	-50.93	0.1	32.59	68.2	-35.61	-	-	0	101	H
			3.225381	47.35	ADR	33.3	-48.14	0.1	32.61	68.2	-35.59	-	-	0	200	V
			3.226526	61.27	PK-U	33.3	-48.13	0	46.44	-	-	88.2	-41.76	0	200	V
			3.226824	59.24	PK-U	33.3	-48.13	0	44.41	-	-	88.2	-43.79	0	200	H
			3.227551	47.6	ADR	33.3	-48.13	0.1	32.87	68.2	-35.33	-	-	0	200	H
			* 12.355314	43.81	ADR	38.9	-43.54	0.1	39.27	54	-14.73	-	-	0	101	V
			* 12.355711	55.49	PK-U	38.9	-43.52	0	50.87	-	-	74	-23.13	0	101	V
			* 12.356578	55.34	PK-U	38.9	-43.48	0	50.76	-	-	74	-23.24	0	101	H
			* 12.357655	43.98	ADR	38.9	-43.47	0.1	39.51	54	-14.49	-	-	0	101	H
		7095 (106T)	2.506477	61.05	PK-U	32.4	-50.28	0	43.17	-	-	88.2	-45.03	0	199	V
			2.506604	49.83	ADR	32.4	-50.27	0.1	32.06	68.2	-36.14	-	-	0	101	H
			2.507644	48.98	ADR	32.4	-50.27	0.1	31.21	68.2	-36.99	-	-	0	199	V
			2.509282	61.1	PK-U	32.4	-50.26	0	43.24	-	-	88.2	-44.96	0	101	H
			* 3.778151	46.55	ADR	33.1	-47.95	0.1	31.8	54	-22.2	-	-	0	199	V
			* 3.779646	59	PK-U	33.1	-47.99	0	44.11	-	-	74	-29.89	0	101	H
			* 3.780356	58.37	PK-U	33.1	-48.01	0	43.46	-	-	74	-30.54	0	199	V
			* 3.781145	47.18	ADR	33.2	-48.05	0.1	32.43	54	-21.57	-	-	0	101	H
			* 12.209992	44.84	ADR	38.9	-43.93	0.1	39.91	54	-14.09	-	-	0	200	V
			* 12.211131	56.91	PK-U	38.9	-43.95	0	51.86	-	-	74	-22.14	0	200	H
			* 12.211671	57.19	PK-U	38.9	-43.97	0	52.12	-	-	74	-21.88	0	200	V
			* 12.212794	44.84	ADR	38.9	-43.96	0.1	39.88	54	-14.12	-	-	0	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6895MHz)

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.269984	60.28	PK-U	29.3	0	-47.9	41.68	-	-	88.2	-46.52	0	101	H
1	* 1.27265	48.38	ADR	29.3	0	-47.9	29.78	68.2	-38.42	-	-	0	101	H
3	* 3.974466	55.97	PK-U	33.4	0	-45.8	43.57	-	-	74	-30.43	0	199	H
3	* 3.975176	44.26	ADR	33.4	0	-45.8	31.86	54	-22.14	-	-	0	199	H
2	* 1.273992	59.78	PK-U	29.4	0	-47.8	41.38	-	-	88.2	-46.82	0	199	V
2	* 1.275349	48.46	ADR	29.4	0	-47.9	29.96	68.2	-38.24	-	-	0	199	V
4	* 3.973949	55.56	PK-U	33.4	0	-45.8	43.16	-	-	74	-30.84	0	199	V
4	* 3.974599	44.17	ADR	33.4	0	-45.8	31.77	54	-22.23	-	-	0	199	V
5	* 12.026809	56.02	PK-U	38.9	0	-43.3	51.62	-	-	74	-22.38	0	101	H
5	* 12.024624	44.42	ADR	38.9	0	-43.36	39.96	54	-14.04	-	-	0	101	H
6	* 12.02225	56.01	PK-U	38.9	0	-43.3	51.61	-	-	74	-22.39	0	101	V
6	* 12.023291	44.45	ADR	38.9	0	-43.3	40.05	54	-13.95	-	-	0	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

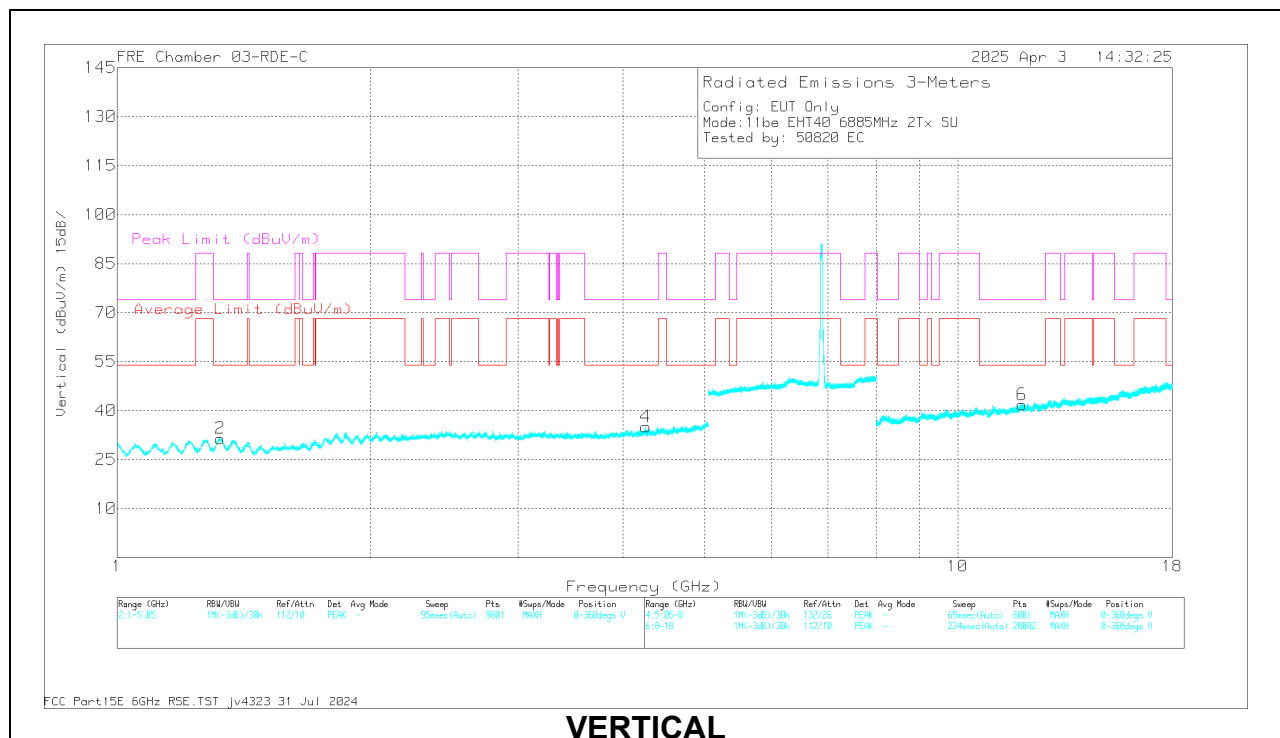
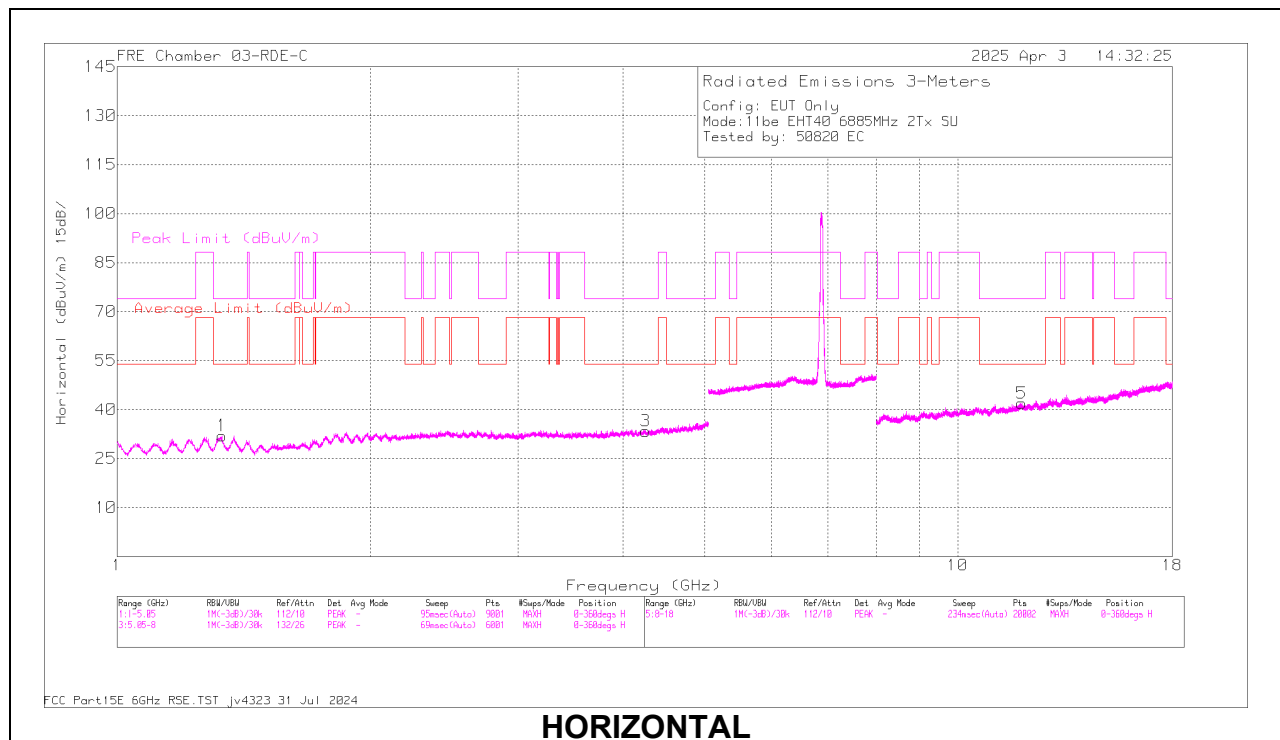
40MHz

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6885 (Straddle)	6 + 5	* 1.329144	60.08	PK-U	29.3	-47.8	0	41.58	-	-	74	-32.42	93	324	H
			* 1.330347	48.42	ADR	29.3	-47.8	0	29.92	54	-24.08	-	-	93	324	H
			* 4.253126	56.51	PK-U	33.6	-46.5	0	43.61	-	-	74	-30.39	52	124	H
			* 4.252887	44.82	ADR	33.6	-46.5	0	31.92	54	-22.08	-	-	52	124	H
			* 1.326722	60.05	PK-U	29.3	-47.8	0	41.55	-	-	74	-32.45	301	158	V
			* 1.327812	48.44	ADR	29.3	-47.8	0	29.94	54	-24.06	-	-	301	158	V
			* 4.254535	56.24	PK-U	33.6	-46.5	0	43.34	-	-	74	-30.66	319	102	V
			* 4.252194	45.15	ADR	33.6	-46.5	0	32.25	54	-21.75	-	-	319	102	V
			* 11.91823	55.02	PK-U	38.8	-42.28	0	51.54	-	-	74	-22.46	17	110	H
			* 11.916235	42.96	ADR	38.8	-42.28	0	39.48	54	-14.52	-	-	17	110	H
			* 11.92312	55.99	PK-U	38.8	-42.4	0	52.39	-	-	74	-21.61	11	244	V
			* 11.923007	43.14	ADR	38.8	-42.4	0	39.54	54	-14.46	-	-	11	244	V
			* 1.222722	59.84	PK-U	29	-48	0	40.84	-	-	74	-33.16	1	101	H
			* 1.219746	48.64	ADR	28.9	-48.1	0	29.44	54	-24.56	-	-	1	101	H
			* 3.973964	56.16	PK-U	33.4	-45.8	0	43.76	-	-	74	-30.24	1	101	H
			* 3.973577	44.53	ADR	33.4	-45.8	0	32.13	54	-21.87	-	-	1	101	H
			* 1.218824	60.82	PK-U	28.9	-48.08	0	41.64	-	-	74	-32.36	1	101	V
	6965	6 + 5	* 1.21855	48.58	ADR	28.9	-48.06	0	29.42	54	-24.58	-	-	1	101	V
			* 3.975766	56.15	PK-U	33.4	-45.8	0	43.75	-	-	74	-30.25	1	101	V
			* 3.974843	44.55	ADR	33.4	-45.8	0	32.15	54	-21.85	-	-	1	101	V
			* 11.823654	55.48	PK-U	38.7	-42.73	0	51.45	-	-	74	-22.55	1	101	H
			* 11.823077	43.65	ADR	38.6	-42.79	0	39.46	54	-14.54	-	-	1	101	H
			* 11.825839	55.59	PK-U	38.7	-42.7	0	51.59	-	-	74	-22.41	1	101	V
			* 11.823687	43.56	ADR	38.7	-42.73	0	39.53	54	-14.47	-	-	1	101	V
			* 1.268552	60.42	PK-U	29.3	-47.84	0	41.88	-	-	88.2	-46.32	2	101	H
			* 1.269184	48.36	ADR	29.3	-47.82	0	29.84	68.2	-38.36	-	-	2	101	H
			* 4.019801	56.55	PK-U	33.4	-46	0	43.95	-	-	74	-30.05	2	101	H
			* 4.020435	44.82	ADR	33.4	-46	0	32.22	54	-21.78	-	-	2	101	H
			* 1.270845	59.74	PK-U	29.3	-47.9	0	41.14	-	-	88.2	-47.06	2	101	V
			* 1.27076	48.52	ADR	29.3	-47.9	0	29.92	68.2	-38.28	-	-	2	101	V
			* 4.018683	56.25	PK-U	33.4	-46	0	43.65	-	-	74	-30.35	2	101	V
			* 4.019437	44.66	ADR	33.4	-46	0	32.06	54	-21.94	-	-	2	101	V
			* 11.741023	55.21	PK-U	38.6	-43.5	0	50.31	-	-	74	-23.69	2	101	H
			* 11.739289	43.79	ADR	38.6	-43.5	0	38.89	54	-15.11	-	-	2	101	H
	7085	6 + 5	* 11.740549	55.92	PK-U	38.6	-43.5	0	51.02	-	-	74	-22.98	2	101	V
			* 11.740165	44.11	ADR	38.6	-43.5	0	39.21	54	-14.79	-	-	2	101	V
11be (Partial RU Mode / Highest PSD)	6885 (Straddle) (52T)	6 + 5	2.62475	61.86	PK-U	32.6	-50.08	0	44.38	-	-	88.2	-43.82	0	200	H
			2.625838	60.6	PK-U	32.6	-50.04	0	43.16	-	-	88.2	-45.04	0	101	V
			2.628427	49.23	ADR	32.6	-50.01	0	31.82	68.2	-36.38	-	-	0	101	V
			2.628472	49.46	ADR	32.6	-50.01	0	32.05	68.2	-36.15	-	-	0	200	H
			* 3.803348	46.71	ADR	33.2	-47.93	0	31.98	54	-22.02	-	-	0	101	V
			* 3.804548	58.21	PK-U	33.2	-47.91	0	43.5	-	-	74	-30.5	0	101	H
			* 3.806037	46.69	ADR	33.2	-47.83	0	32.06	54	-21.94	-	-	0	101	H
			* 3.806951	58.39	PK-U	33.2	-47.88	0	43.71	-	-	74	-30.29	0	101	V
			* 9.435068	57.52	PK-U	36.4	-45.86	0	48.06	-	-	74	-25.94	0	101	H
			* 9.43533	45.94	ADR	36.4	-45.84	0	36.5	54	-17.5	-	-	0	101	V
			* 9.436309	45.92	ADR	36.4	-45.82	0	36.5	54	-17.5	-	-	0	101	H
			* 9.436374	57.25	PK-U	36.4	-45.82	0	47.83	-	-	74	-26.17	0	101	V
	6965 (52T)	6 + 5	* 2.260626	61.87	PK-U	32.1	-50.92	0	43.05	-	-	74	-30.95	0	101	V
			* 2.260691	49.96	ADR	32.1	-50.92	0	31.14	54	-22.86	-	-	0	101	V
			* 2.263199	50.95	ADR	32.1	-50.94	0	32.11	54	-21.89	-	-	0	200	H
			* 2.263386	63.5	PK-U	32.1	-50.93	0	44.67	-	-	74	-29.33	0	200	H
			* 3.784565	46.72	ADR	33.2	-48.05	0	31.87	54	-22.13	-	-	0	200	V
			* 3.785594	64.51	PK-U	33.2	-48.07	0	49.64	-	-	74	-24.36	0	200	V
			* 3.78698	59.12	PK-U	33.2	-48.01	0	44.31	-	-	74	-29.69	0	101	H
			* 3.787	47.35	ADR	33.2	-48.01	0	32.54	54	-21.46	-	-	0	101	H
			* 10.769038	45.4	ADR	37.6	-45.35	0	37.65	54	-16.35	-	-	0	200	V
			* 10.771565	45.44	ADR	37.6	-45.2	0	37.84	54	-16.16	-	-	0	101	H
			* 10.771623	58.54	PK-U	37.6	-45.2	0	50.94	-	-	74	-23.06	0	200	V
			* 10.772648	57.49	PK-U	37.6	-45.26	0	49.83	-	-	74	-24.17	0	101	H
	7085 (52T)	6 + 5	1.894595	60	PK-U	31.2	-50.46	0	40.74	-	-	88.2	-47.46	2	101	H
			1.897916	48.66	ADR	31.2	-50.48	0	29.38	68.2	-38.82	-	-	2	101	H
			1.898584	60.6	PK-U	31.2	-50.49	0	41.31	-	-	88.2	-46.89	2	200	V
			1.900446	49.05	ADR	31.3	-50.47	0	29.88	68.2	-38.32	-	-	2	200	V
			3.522293	46.36	ADR	33	-47.9	0	31.46	68.2	-36.74	-	-	2	200	H
			3.522868	57.99	PK-U	33	-47.87	0	43.12	-	-	88.2	-45.08	2	200	H
			3.524393	58.47	PK-U	33	-47.88	0	43.59	-	-	88.2	-44.61	2	200	V
			3.524961	46.64	ADR	33	-47.88	0	31.76	68.2	-36.44	-	-	2	200	V
			* 12.400696	43.57	ADR	38.9	-44.18	0	38.29	54	-15.71	-	-	2	200	V
			* 12.401253	55.45	PK-U	38.9	-44.17	0	50.18	-	-	74	-23.82	2	200	V
			* 12.402168	43.94	ADR	38.9	-44.17	0	38.67	54	-15.33	-	-	2	101	H
			* 12.404994	54.98	PK-U	38.9	-44.2	0	49.68	-	-	74	-24.32	2	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6885MHz)

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.329144	60.08	PK-U	29.3	0	-47.8	41.58	-	-	74	-32.42	93	324	H
* 1.330347	48.42	ADR	29.3	0	-47.8	29.92	54	-24.08	-	-	93	324	H
* 4.253126	56.51	PK-U	33.6	0	-46.5	43.61	-	-	74	-30.39	52	124	H
* 4.252887	44.82	ADR	33.6	0	-46.5	31.92	54	-22.08	-	-	52	124	H
* 1.326722	60.05	PK-U	29.3	0	-47.8	41.55	-	-	74	-32.45	301	158	V
* 1.327812	48.44	ADR	29.3	0	-47.8	29.94	54	-24.06	-	-	301	158	V
* 4.254535	56.24	PK-U	33.6	0	-46.5	43.34	-	-	74	-30.66	319	102	V
* 4.252194	45.15	ADR	33.6	0	-46.5	32.25	54	-21.75	-	-	319	102	V
* 11.91823	55.02	PK-U	38.8	0	-42.28	51.54	-	-	74	-22.46	17	110	H
* 11.916235	42.96	ADR	38.8	0	-42.28	39.48	54	-14.52	-	-	17	110	H
* 11.92312	55.99	PK-U	38.8	0	-42.4	52.39	-	-	74	-21.61	11	244	V
* 11.923007	43.14	ADR	38.8	0	-42.4	39.54	54	-14.46	-	-	11	244	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

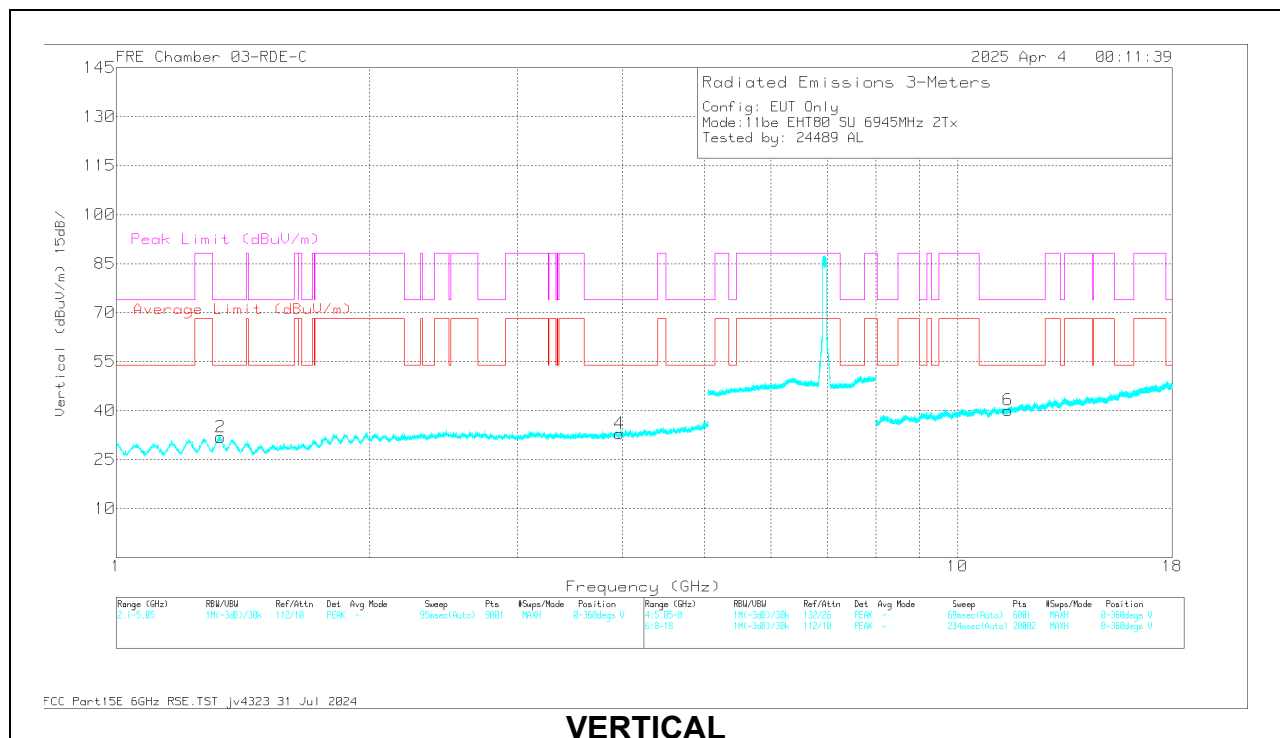
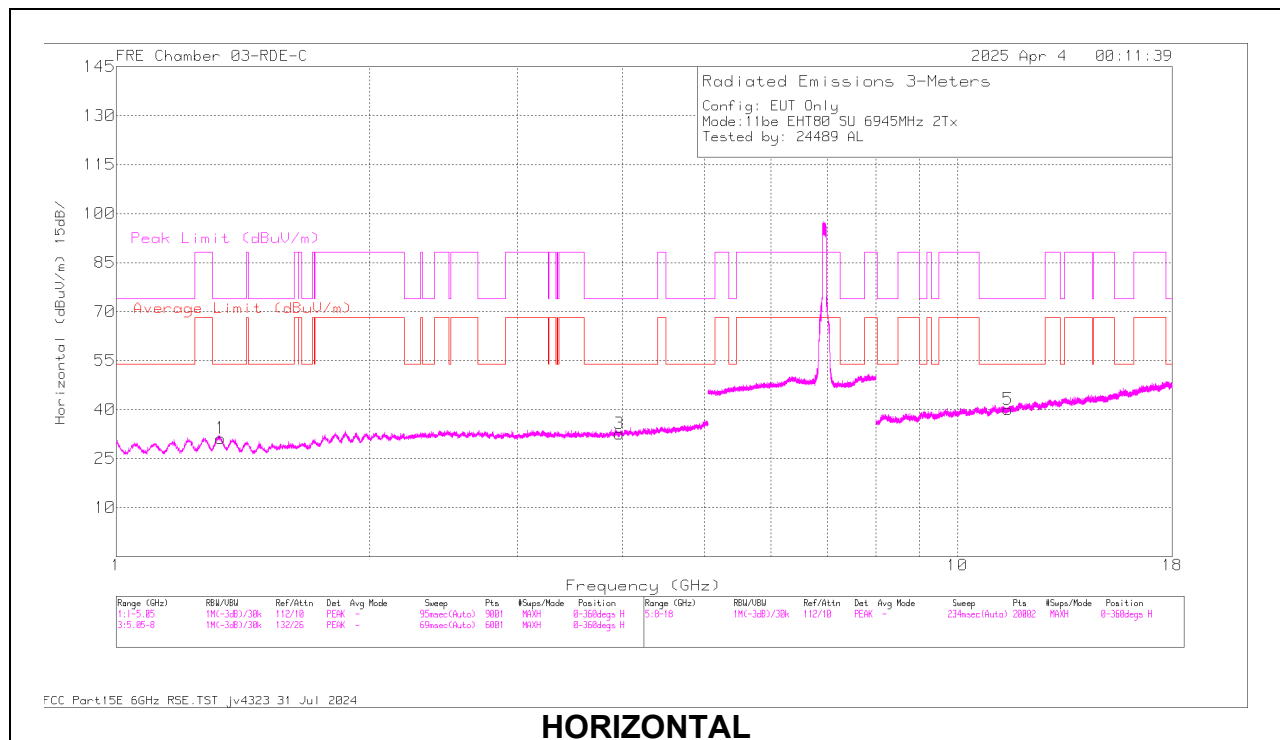
80MHz

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6945	6 + 5	* 1.329494	59.87	PK-U	29.3	-47.8	0	41.37	-	-	74	-32.63	360	199	H
			* 1.330323	48.24	ADR	29.3	-47.8	0	29.74	54	-24.26	-	-	360	199	H
			* 3.961195	54.93	PK-U	33.4	-45.8	0	42.53	-	-	74	-31.47	360	101	H
			* 3.962417	43.51	ADR	33.4	-45.8	0	31.11	54	-22.89	-	-	360	101	H
			* 1.33041	60.29	PK-U	29.3	-47.8	0	41.79	-	-	74	-32.21	360	200	V
			* 1.329423	48.23	ADR	29.3	-47.8	0	29.73	54	-24.27	-	-	360	200	V
			* 3.965669	55.17	PK-U	33.4	-45.7	0	42.87	-	-	74	-31.13	360	101	V
			* 3.962853	43.58	ADR	33.4	-45.8	0	31.18	54	-22.82	-	-	360	101	V
			* 11.482299	55.52	PK-U	38.3	-43.3	0	50.52	-	-	74	-23.48	360	101	H
			* 11.481889	43.75	ADR	38.3	-43.29	0	38.76	54	-15.24	-	-	360	101	H
			* 11.481463	56.42	PK-U	38.3	-43.25	0	51.47	-	-	74	-22.53	360	101	V
			* 11.480219	43.63	ADR	38.3	-43.28	0	38.65	54	-15.35	-	-	360	101	V
	7025	6 + 5	* 1.325707	60.29	PK-U	29.3	-47.8	0	41.79	-	-	74	-32.21	149	177	H
			* 1.328491	48.56	ADR	29.3	-47.8	0	30.06	54	-23.94	-	-	149	177	H
			* 4.038197	56.79	PK-U	33.4	-46.1	0	44.09	-	-	74	-29.91	250	292	H
			* 4.037403	44.5	ADR	33.4	-46.1	0	31.8	54	-22.2	-	-	250	292	H
			* 1.328223	60.59	PK-U	29.3	-47.8	0	42.09	-	-	74	-31.91	63	264	V
			* 1.328535	48.32	ADR	29.3	-47.8	0	29.82	54	-24.18	-	-	63	264	V
			* 4.033578	56.2	PK-U	33.4	-46.06	0	43.54	-	-	74	-30.46	104	122	V
			* 4.036429	44.69	ADR	33.4	-46.1	0	31.99	54	-22.01	-	-	104	122	V
			* 11.917918	54.76	PK-U	38.8	-42.29	0	51.27	-	-	74	-22.73	128	305	H
			* 11.915088	43	ADR	38.8	-42.3	0	39.5	54	-14.5	-	-	128	305	H
11be (Partial RU Mode / Highest PSD)	6945 (106T)	6 + 5	* 11.904206	55.05	PK-U	38.7	-42.48	0	51.27	-	-	74	-22.73	90	311	V
			* 11.906188	43.26	ADR	38.7	-42.48	0	39.48	54	-14.52	-	-	90	311	V
			* 2.276741	61	PK-U	31.8	-50.32	0	42.48	-	-	74	-31.52	359	232	H
			* 2.273293	49.52	ADR	31.8	-50.3	0	31.02	54	-22.98	-	-	359	232	H
			* 3.600727	58.47	PK-U	33.8	-47.69	0	44.58	-	-	74	-29.42	34	379	H
			3.59775	46.52	ADR	33.8	-47.68	0	32.64	68.2	-35.56	-	-	34	379	H
			2.301476	61.87	PK-U	31.9	-50.1	0	43.67	-	-	88.2	-44.53	343	160	V
			* 2.272941	49.31	ADR	31.8	-50.3	0	30.81	54	-23.19	-	-	343	160	V
			3.590827	57.97	PK-U	33.7	-47.64	0	44.03	-	-	88.2	-44.17	199	222	V
			3.597715	46.4	ADR	33.8	-47.68	0	32.52	68.2	-35.68	-	-	199	222	V
	7025 (Straddle) (106T)	6 + 5	13.100668	55.39	PK-U	38.8	-43.19	0	51	-	-	88.2	-37.2	168	260	H
			13.1033	43.03	ADR	38.8	-43.14	0	38.69	68.2	-29.51	-	-	168	260	H
			13.068852	55.28	PK-U	38.8	-43.21	0	50.87	-	-	88.2	-37.33	23	313	V
			13.082831	43.27	ADR	38.8	-43.38	0	38.69	68.2	-29.51	-	-	23	313	V
			* 3.509672	55.35	PK-U	33	-45.2	0	43.15	-	-	88.2	-45.05	153	209	H
			* 3.511576	43.89	ADR	33	-45.16	0	31.73	68.2	-36.47	-	-	153	209	H
			* 2.340211	58.3	PK-U	31.8	-47.08	0	43.02	-	-	74	-30.98	13	152	H
			* 2.339737	46.21	ADR	31.8	-47.07	0	30.94	54	-23.06	-	-	13	152	H
			* 3.507218	55.99	PK-U	32.9	-45.2	0	43.69	-	-	88.2	-44.51	50	368	V
			* 3.507816	44.22	ADR	32.9	-45.2	0	31.92	68.2	-36.28	-	-	50	368	V
			* 2.340407	58.02	PK-U	31.8	-47.06	0	42.76	-	-	74	-31.24	276	192	V
			* 2.340813	46.19	ADR	31.8	-47.02	0	30.97	54	-23.03	-	-	276	192	V
			14.052722	54.52	PK-U	39.1	-42.6	0	51.02	-	-	88.2	-37.18	133	232	H
			14.051365	43.2	ADR	39.1	-42.66	0	39.64	68.2	-28.56	-	-	133	232	H
			14.050691	54.66	PK-U	39.1	-42.7	0	51.06	-	-	88.2	-37.14	272	176	V
			14.053716	43.23	ADR	39.1	-42.6	0	39.73	68.2	-28.47	-	-	272	176	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6945MHz)

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.329494	59.87	PK-U	29.3	0	-47.8	41.37	-	-	74	-32.63	360	199	H
1	* 1.330323	48.24	ADR	29.3	0	-47.8	29.74	54	-24.26	-	-	360	199	H
3	* 3.961195	54.93	PK-U	33.4	0	-45.8	42.53	-	-	74	-31.47	360	101	H
3	* 3.962417	43.51	ADR	33.4	0	-45.8	31.11	54	-22.89	-	-	360	101	H
2	* 1.33041	60.29	PK-U	29.3	0	-47.8	41.79	-	-	74	-32.21	360	200	V
2	* 1.329423	48.23	ADR	29.3	0	-47.8	29.73	54	-24.27	-	-	360	200	V
4	* 3.965669	55.17	PK-U	33.4	0	-45.7	42.87	-	-	74	-31.13	360	101	V
4	* 3.962853	43.58	ADR	33.4	0	-45.8	31.18	54	-22.82	-	-	360	101	V
5	* 11.482299	55.52	PK-U	38.3	0	-43.3	50.52	-	-	74	-23.48	360	101	H
5	* 11.481889	43.75	ADR	38.3	0	-43.29	38.76	54	-15.24	-	-	360	101	H
6	* 11.481463	56.42	PK-U	38.3	0	-43.25	51.47	-	-	74	-22.53	360	101	V
6	* 11.480219	43.63	ADR	38.3	0	-43.28	38.65	54	-15.35	-	-	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

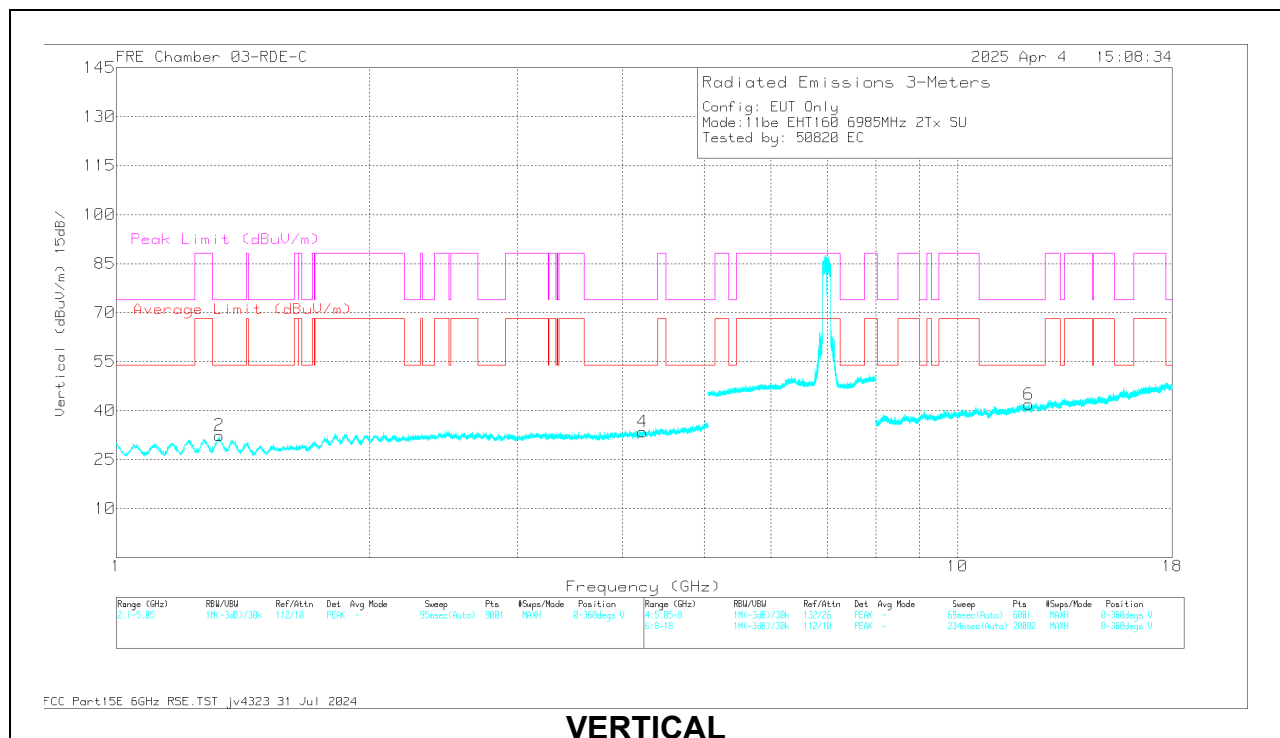
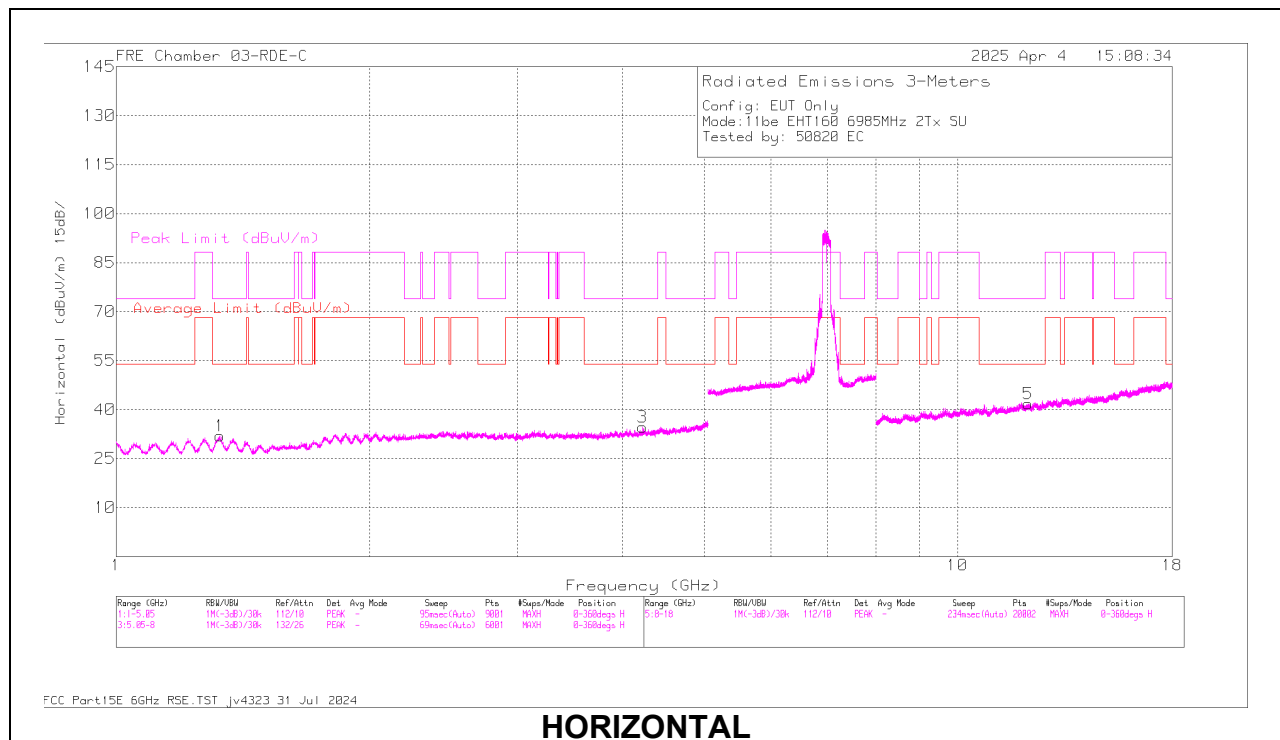
160MHz

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6985	6 + 5	* 1.327861	60.01	PK-U	29.3	-47.8	0	41.51	-	-	74	-32.49	42	273	H
			* 1.327002	48.3	ADR	29.3	-47.8	0	29.8	54	-24.2	-	-	42	273	H
			* 4.225385	56.1	PK-U	33.6	-46.4	0	43.3	-	-	74	-30.7	32	233	H
			* 4.227084	44.12	ADR	33.6	-46.4	0	31.32	54	-22.68	-	-	32	233	H
			* 1.325811	60.2	PK-U	29.3	-47.8	0	41.7	-	-	74	-32.3	170	265	V
			* 1.326015	48.39	ADR	29.3	-47.8	0	29.89	54	-24.11	-	-	170	265	V
			* 4.222982	55.79	PK-U	33.6	-46.4	0	42.99	-	-	74	-31.01	180	296	V
			* 4.226539	44.1	ADR	33.6	-46.4	0	31.3	54	-22.7	-	-	180	296	V
			* 12.133098	55.35	PK-U	38.9	-43.29	0	50.96	-	-	74	-23.04	17	214	H
			* 12.133991	43.58	ADR	38.9	-43.2	0	39.28	54	-14.72	-	-	17	214	H
			* 12.159057	56.12	PK-U	39	-43.29	0	51.83	-	-	74	-22.17	205	228	V
			* 12.159614	43.57	ADR	39	-43.24	0	39.33	54	-14.67	-	-	205	228	V
11be (Partial RU Mode / Highest PSD)	6985 (52T)	6 + 5	* 2.257583	61.72	PK-U	31.7	-50.28	0	43.14	-	-	74	-30.86	107	206	H
			* 2.231821	49.26	ADR	31.7	-50.32	0	30.64	54	-23.36	-	-	107	206	H
			* 3.863502	58.28	PK-U	33.4	-47.81	0	43.87	-	-	74	-30.13	7	196	H
			* 3.86192	46.23	ADR	33.4	-47.82	0	31.81	54	-22.19	-	-	7	196	H
			* 2.232842	61.7	PK-U	31.7	-50.34	0	43.06	-	-	74	-30.94	288	335	V
			* 2.260456	49.62	ADR	31.7	-50.27	0	31.05	54	-22.95	-	-	288	335	V
			* 3.854966	58.19	PK-U	33.4	-47.69	0	43.9	-	-	74	-30.1	192	122	V
			* 3.862902	46.35	ADR	33.4	-47.8	0	31.95	54	-22.05	-	-	192	122	V
			14.003029	56.22	PK-U	39.1	-44.06	0	51.26	-	-	88.2	-36.94	249	358	H
			14.005256	44.26	ADR	39.1	-43.97	0	39.39	68.2	-28.81	-	-	249	358	H
			13.987835	55.87	PK-U	39.1	-43.97	0	51	-	-	88.2	-37.2	356	132	V
			13.999478	44.1	ADR	39.1	-44.03	0	39.17	68.2	-29.03	-	-	356	132	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6985MHz)

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.327861	60.01	PK-U	29.3	0	-47.8	41.51	-	-	74	-32.49	42	273	H
* 1.327002	48.3	ADR	29.3	0	-47.8	29.8	54	-24.2	-	-	42	273	H
* 4.225385	56.1	PK-U	33.6	0	-46.4	43.3	-	-	74	-30.7	32	233	H
* 4.227084	44.12	ADR	33.6	0	-46.4	31.32	54	-22.68	-	-	32	233	H
* 1.325811	60.2	PK-U	29.3	0	-47.8	41.7	-	-	74	-32.3	170	265	V
* 1.326015	48.39	ADR	29.3	0	-47.8	29.89	54	-24.11	-	-	170	265	V
* 4.222982	55.79	PK-U	33.6	0	-46.4	42.99	-	-	74	-31.01	180	296	V
* 4.226539	44.1	ADR	33.6	0	-46.4	31.3	54	-22.7	-	-	180	296	V
* 12.133098	55.35	PK-U	38.9	0	-43.29	50.96	-	-	74	-23.04	17	214	H
* 12.133991	43.58	ADR	38.9	0	-43.2	39.28	54	-14.72	-	-	17	214	H
* 12.159057	56.12	PK-U	39	0	-43.29	51.83	-	-	74	-22.17	205	228	V
* 12.159614	43.57	ADR	39	0	-43.24	39.33	54	-14.67	-	-	205	228	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.2. TRANSMITTER OUTSIDE 6.115 - 7.125 GHz, 1- 18GHz (VLP)

1.2.1. 802.11be SISO/MIMO MODE IN UNII-5 BAND – LOW BANDEDGE

The UNII-5 band was excluded from band-edge testing because its starting frequency lies well inside the band-edge threshold.

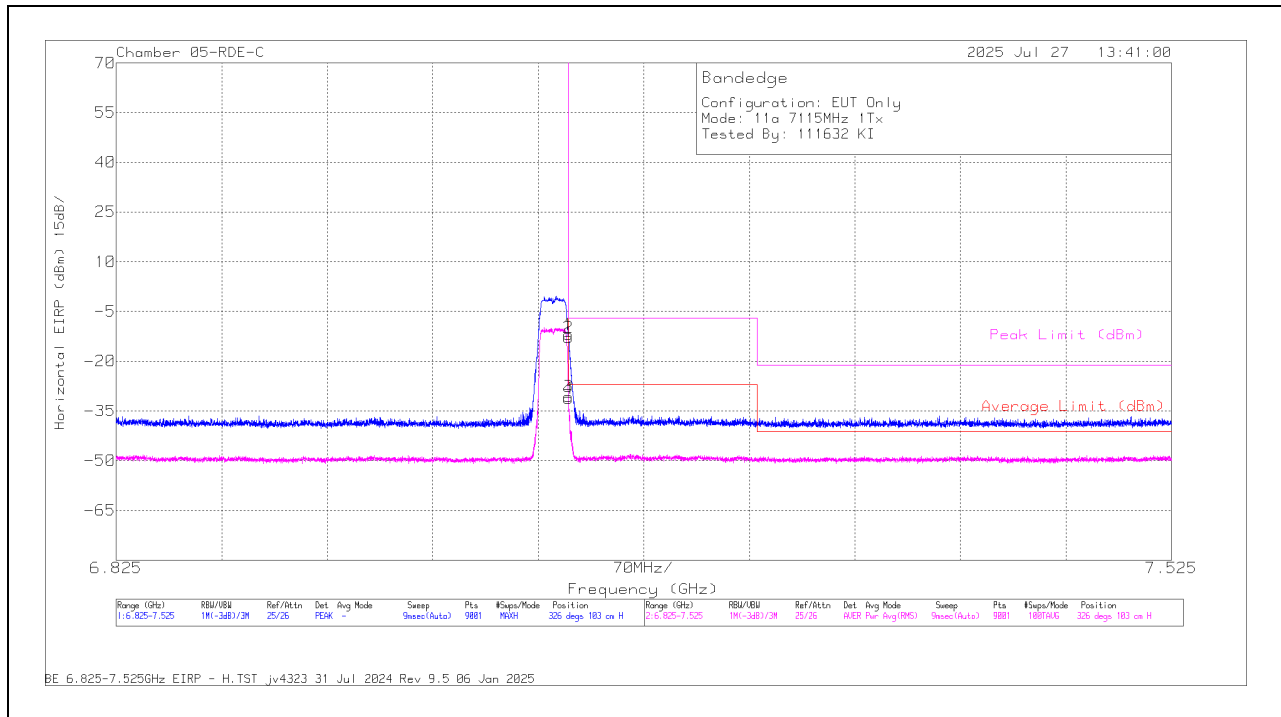
1.2.2. 802.11a SISO MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a	7115	6	7.125	-22.88	Pk	35.7	11.8	0	-36.51	-11.89	-	-	-7	-4.89	326	103	H
			7.125	-41.67	RMS	35.7	11.8	0	-36.51	-30.68	-27	-3.68	-	-	326	103	H
			7.125068	-23.86	Pk	35.7	11.8	0	-36.52	-12.88	-	-	-7	-5.88	326	103	H
			7.125068	-42.18	RMS	35.7	11.8	0	-36.52	-31.2	-27	-4.2	-	-	326	103	H
			7.125	-39.4	Pk	35.7	11.8	0	-36.51	-28.41	-	-	-7	-21.41	259	101	V
			7.125	-56.69	RMS	35.7	11.8	0	-36.51	-45.7	-27	-18.7	-	-	259	101	V
			* 7.381113	-58.98	RMS	35.6	11.8	0	-36.8	-48.38	-41.2	-7.18	-	-	259	101	V
			* 7.482535	-46.97	Pk	35.7	11.8	0	-37.27	-36.74	-	-	-21.2	-15.54	259	101	V
		5	7.125	-22.71	Pk	35.7	11.8	0	-36.51	-11.72	-	-	-7	-4.72	68	208	H
			7.125	-41.73	RMS	35.7	11.8	0	-36.51	-30.74	-27	-3.74	-	-	68	208	H
			7.125068	-22.95	Pk	35.7	11.8	0	-36.52	-11.97	-	-	-7	-4.97	68	208	H
			7.125068	-42.81	RMS	35.7	11.8	0	-36.52	-31.83	-27	-4.83	-	-	68	208	H
			7.125	-26.48	Pk	35.7	11.8	0	-36.51	-15.49	-	-	-7	-8.49	360	215	V
			7.125	-44.22	RMS	35.7	11.8	0	-36.51	-33.23	-27	-6.23	-	-	360	215	V
			7.125068	-26.82	Pk	35.7	11.8	0	-36.52	-15.84	-	-	-7	-8.84	360	215	V
			* 7.482691	-58.72	RMS	35.7	11.8	0	-37.29	-48.51	-41.2	-7.31	-	-	360	215	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

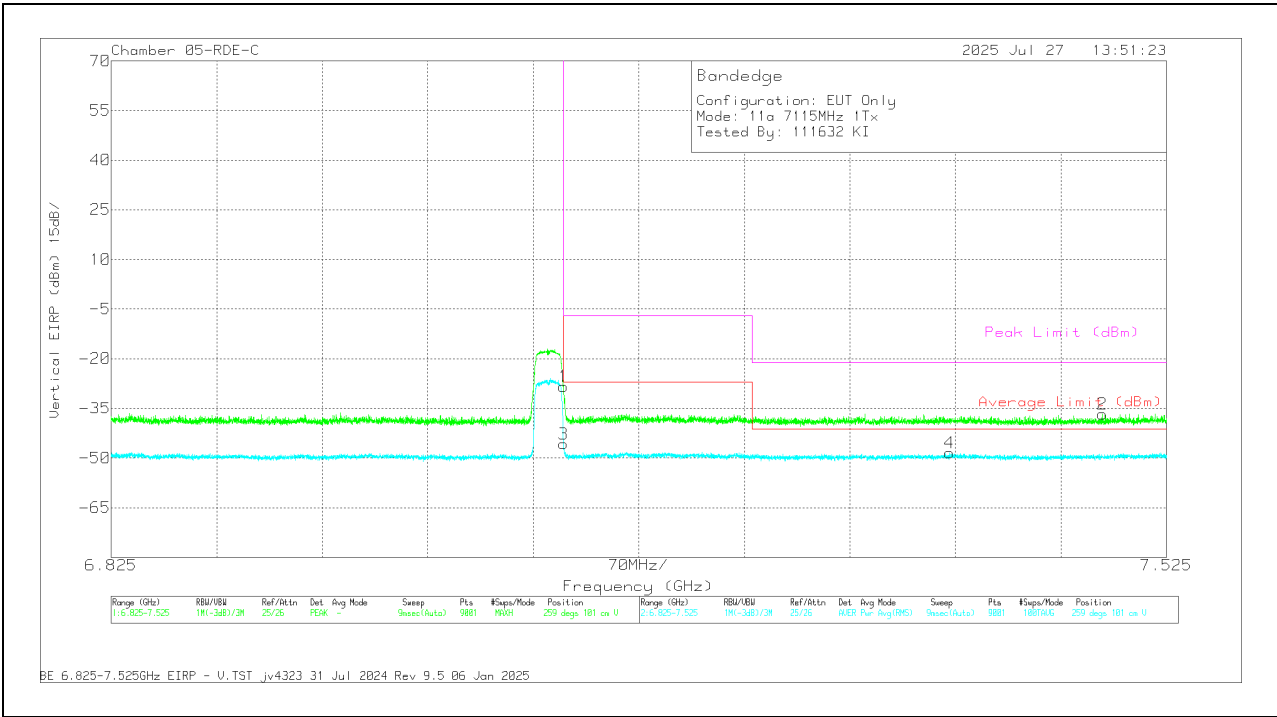
RMS - RMS detection

1TX Antenna 6 MODE: 11a**BANDEDGE (HIGH CHANNEL / 7115MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230300 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-22.88	Pk	35.7	11.8	0	-36.51	-11.89	-	-	-7	-4.89	326	103	H
3	7.125	-41.67	RMS	35.7	11.8	0	-36.51	-30.68	-27	-3.68	-	-	326	103	H
2	7.125068	-23.86	Pk	35.7	11.8	0	-36.52	-12.88	-	-	-7	-5.88	326	103	H
4	7.125068	-42.18	RMS	35.7	11.8	0	-36.52	-31.2	-27	-4.2	-	-	326	103	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT



Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230300 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-39.4	PK	35.7	11.8	0	-36.51	-28.41	-	-	-7	-21.41	259	101	V
3	7.125	-56.69	RMS	35.7	11.8	0	-36.51	-45.7	-27	-18.7	-	-	259	101	V
4	* 7.381113	-58.98	RMS	35.6	11.8	0	-36.8	-48.38	-41.2	-7.18	-	-	259	101	V
2	* 7.482535	-46.97	PK	35.7	11.8	0	-37.27	-36.74	-	-	-21.2	-15.54	259	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

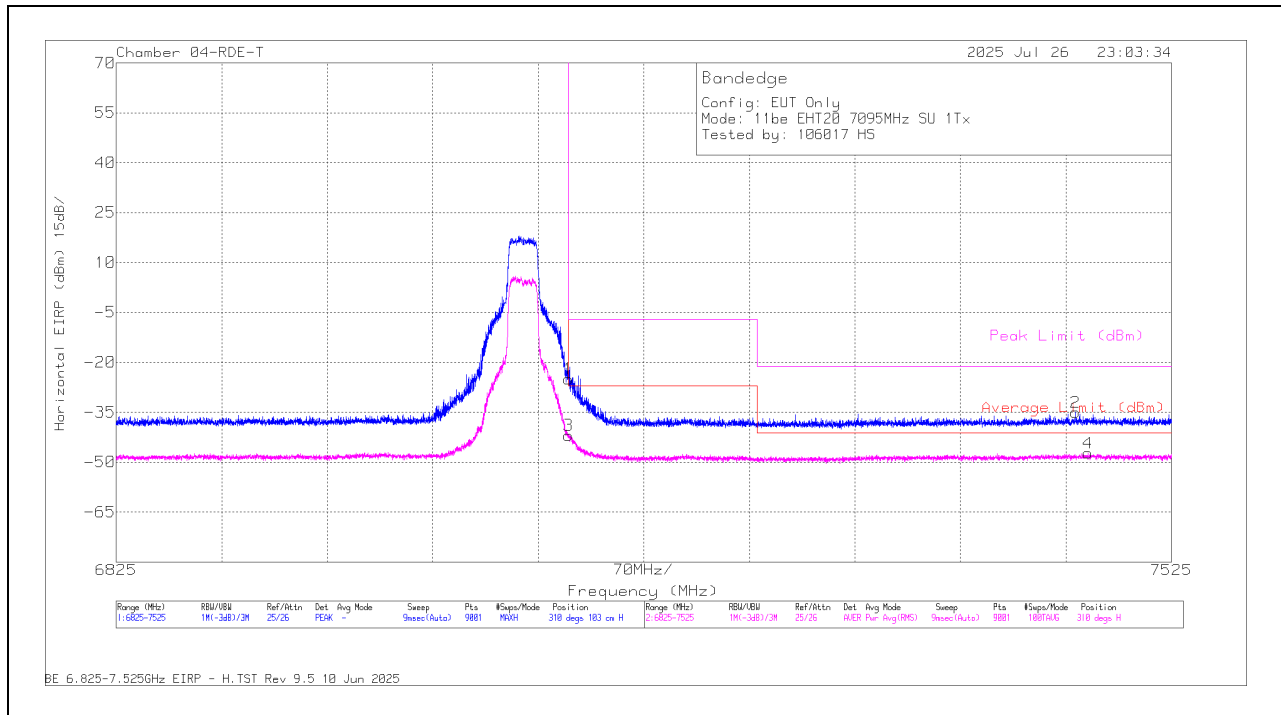
1.2.3. 802.11be SISO SU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	7095	6	* 7.461302	-48.06	Pk	35.5	11.8	0	-34.3	-35.06	-	-	-21.2	-13.86	310	103	H
			* 7.469624	-60.32	RMS	35.5	11.8	0	-34.29	-47.31	-41.2	-6.11	-	-	310	103	H
			7.125	-37.62	Pk	35.5	11.8	0	-34.6	-24.92	-	-	-7	-17.92	310	103	H
			7.125	-54.62	RMS	35.5	11.8	0	-34.6	-41.92	-27	-14.92	-	-	310	103	H
			* 7.462002	-48.74	Pk	35.5	11.8	0	-34.32	-35.76	-	-	-21.2	-14.56	281	394	V
			* 7.413624	-59.98	RMS	35.3	11.8	0	-34.47	-47.35	-41.2	-6.15	-	-	281	394	V
		5	7.125	-49.31	Pk	35.5	11.8	0	-34.6	-36.61	-	-	-7	-29.61	281	394	V
			7.125	-60.63	RMS	35.5	11.8	0	-34.6	-47.93	-27	-20.93	-	-	281	394	V
			7.125	-35.24	Pk	35.7	11.8	0	-36.34	-24.08	-	-	-7	-17.08	70	135	H
			7.125	-52.03	RMS	35.7	11.8	0	-36.34	-40.87	-27	-13.87	-	-	70	135	H
			7.125923	-33.64	Pk	35.7	11.8	0	-36.29	-22.43	-	-	-7	-15.43	70	135	H
			* 7.382046	-60.08	RMS	35.6	11.8	0	-36.23	-48.91	-41.2	-7.71	-	-	70	135	H
			7.125	-37.36	Pk	35.7	11.8	0	-36.34	-26.2	-	-	-7	-19.2	85	154	V
			7.125	-54.03	RMS	35.7	11.8	0	-36.34	-42.87	-27	-15.87	-	-	85	154	V
			* 7.256668	-60.34	RMS	35.7	11.8	0	-36.11	-48.95	-41.2	-7.75	-	-	85	154	V
			* 7.448702	-48.36	Pk	35.7	11.8	0	-36.28	-37.14	-	-	-21.2	-15.94	85	154	V
EHT40 (SU Mode)	7085	6	7.125	-25.22	Pk	35.6	11.8	0	-37.18	-15	-	-	-7	-8	16	127	H
			7.125	-40.62	RMS	35.6	11.8	0	-37.18	-30.4	-27	-3.4	-	-	16	127	H
			7.125379	-40.2	RMS	35.6	11.8	0	-37.17	-29.97	-27	-2.97	-	-	16	127	H
			7.125768	-23.47	Pk	35.6	11.8	0	-37.16	-13.23	-	-	-7	-6.23	16	127	H
			7.125	-40.52	Pk	35.6	11.8	0	-37.18	-30.3	-	-	-7	-23.3	261	106	V
			7.125	-53.83	RMS	35.6	11.8	0	-37.18	-43.61	-27	-16.61	-	-	261	106	V
		5	* 7.345879	-46.88	Pk	35.6	11.8	0	-37.75	-37.23	-	-	-21.2	-16.03	261	106	V
			* 7.455391	-59.32	RMS	35.6	11.8	0	-37.42	-49.34	-41.2	-8.14	-	-	261	106	V
			7.125	-28.54	Pk	35.6	11.8	0	-37.18	-18.32	-	-	-7	-11.32	63	207	H
			7.125	-43.86	RMS	35.6	11.8	0	-37.18	-33.64	-27	-6.64	-	-	63	207	H
			7.125612	-43.58	RMS	35.6	11.8	0	-37.17	-33.35	-27	-6.35	-	-	63	207	H
			7.126779	-27.62	Pk	35.6	11.8	0	-37.22	-17.44	-	-	-7	-10.44	63	207	H
			7.125	-34.81	Pk	35.6	11.8	0	-37.18	-24.59	-	-	-7	-17.59	356	309	V
			7.125	-48.58	RMS	35.6	11.8	0	-37.18	-38.36	-27	-11.36	-	-	356	309	V
			7.126856	-31.53	Pk	35.6	11.8	0	-37.23	-21.36	-	-	-7	-14.36	356	309	V
			7.404213	-58.99	RMS	35.6	11.8	0	-37.6	-49.19	-41.2	-7.99	-	-	356	309	V
EHT80 (SU Mode)	7025	6	* 7.511002	-67.34	RMS	35.6	11.8	0	-27.9	-47.84	-41.2	-6.64	-	-	140	107	H
			7.125	-43.09	Pk	35.6	11.8	0	-28.4	-24.09	-	-	-7	-17.09	140	107	H
			7.125	-59.81	RMS	35.6	11.8	0	-28.4	-40.81	-27	-13.81	-	-	140	107	H
			7.12779	-40.44	Pk	35.6	11.8	0	-28.4	-21.44	-	-	-7	-14.44	140	107	H
			* 7.488991	-55.33	Pk	35.6	11.8	0	-27.9	-35.83	-	-	-21.2	-14.63	208	208	V
			* 7.511002	-67.25	RMS	35.6	11.8	0	-27.9	-47.75	-41.2	-6.55	-	-	208	208	V
		5	7.125	-54.83	Pk	35.6	11.8	0	-28.4	-35.83	-	-	-7	-28.83	208	208	V
			7.125	-66.85	RMS	35.6	11.8	0	-28.4	-47.85	-27	-20.85	-	-	208	208	V
			* 7.419613	-47.87	Pk	35.5	11.8	0	-36.16	-36.73	-	-	-21.2	-15.53	183	194	H
			* 7.447846	-60.08	RMS	35.6	11.8	0	-36.12	-48.8	-41.2	-7.6	-	-	183	194	H
			7.125	-43.83	Pk	35.5	11.8	0	-35.98	-32.51	-	-	-7	-25.51	183	194	H
			7.125	-56.9	RMS	35.5	11.8	0	-35.98	-45.58	-27	-18.58	-	-	183	194	H
			* 7.474991	-48.05	Pk	35.6	11.8	0	-36.04	-36.69	-	-	-21.2	-15.49	122	192	V
			* 7.500346	-60.08	RMS	35.6	11.8	0	-35.98	-48.66	-41.2	-7.46	-	-	122	192	V
			7.125	-45.95	Pk	35.5	11.8	0	-35.98	-34.63	-	-	-7	-27.63	122	192	V
			7.125	-58.15	RMS	35.5	11.8	0	-35.98	-46.83	-27	-19.83	-	-	122	192	V
EHT160 (SU Mode)	6985	6	7.125	-30.7	Pk	35.5	11.8	0	-35.98	-19.38	-	-	-7	-12.38	83	102	H
			7.125	-42.64	RMS	35.5	11.8	0.14	-35.98	-31.18	-27	-4.18	-	-	83	102	H
			7.133312	-41.19	RMS	35.5	11.8	0.14	-36.04	-29.79	-27	-2.79	-	-	83	102	H
			7.133468	-26.84	Pk	35.5	11.8	0	-36.04	-15.58	-	-	-7	-8.58	83	102	H
			* 7.500191	-47.91	Pk	35.6	11.8	0	-35.99	-36.5	-	-	-21.2	-15.3	95	101	
			* 7.514891	-60.26	RMS	35.6	11.8	0.14	-35.91	-48.63	-41.2	-7.43	-	-	95	101	
		5	7.125	-46.9	Pk	35.5	11.8	0	-35.98	-35.58	-	-	-7	-28.58	95	101	
			7.125	-58.96	RMS	35.5	11.8	0.14	-35.98	-47.5	-27	-20.5	-	-	95	101	
			* 7.327524	-47.78	Pk	35.5	11.8	0	-36.06	-36.54	-	-	-21.2	-15.34	187	183	H
			* 7.296646	-59.97	RMS	35.5	11.8	0.14	-35.99	-48.52	-41.2	-7.32	-	-	187	183	H
			7.125	-41.58	Pk	35.5	11.8	0	-35.98	-30.26	-	-	-7	-23.26	187	183	H
			7.125	-54.19	RMS	35.5	11.8	0.14	-35.98	-42.73	-27	-15.73	-	-	187	183	H
			* 7.300068	-48.1	Pk	35.5	11.8	0	-36.03	-36.83	-	-	-21.2	-15.63	122	224	V
			* 7.522435	-60.11	RMS	35.6	11.8	0.14	-35.88	-48.45	-41.2	-7.25	-	-	122	224	V
			7.125	-41.99	Pk	35.5	11.8	0	-35.98	-30.67	-	-	-7	-23.67	122	224	V
			7.125	-54.55	RMS	35.5	11.8	0.14	-35.98	-43.09	-27	-16.09	-	-	122	224	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1TX Antenna 6 MODE: SU**BANDEDGE (HIGH CHANNEL / 7095MHz)****HORIZONTAL RESULT**

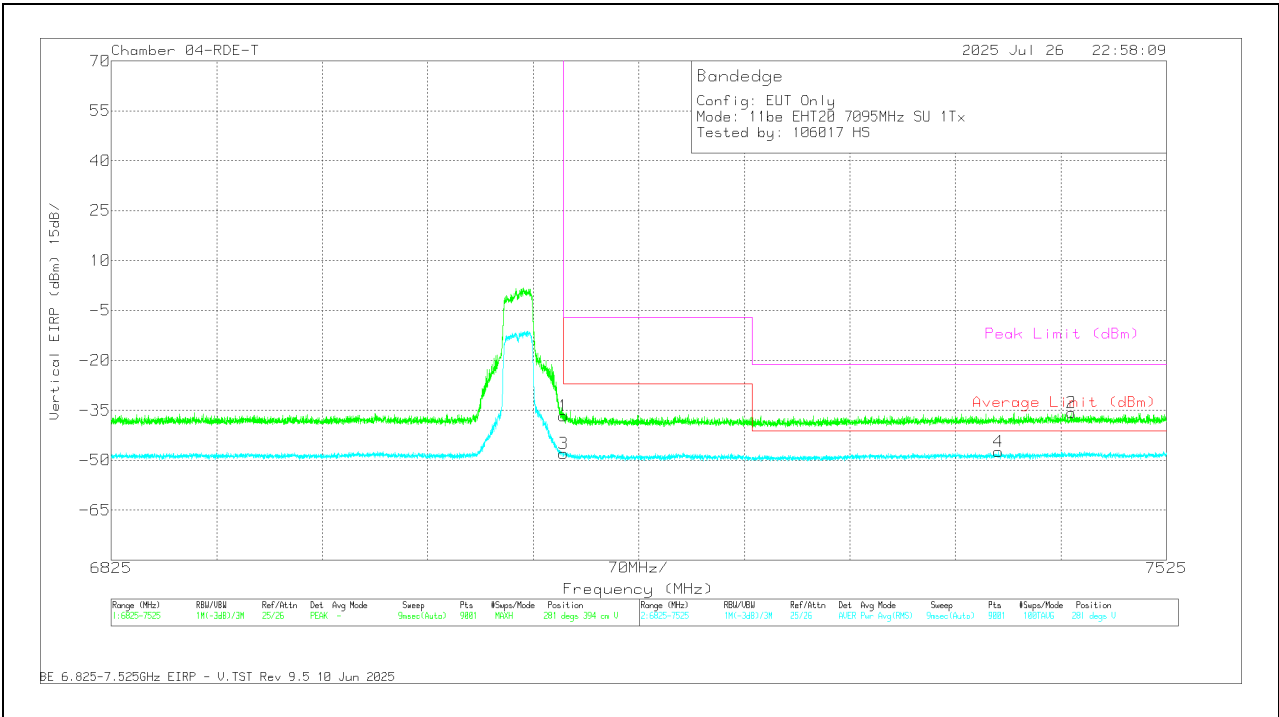
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	79834 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 7.461302	-48.06	Pk	35.5	11.8	0	-34.3	-35.06	-	-	-21.2	-13.86	310	103	H
4	* 7.469624	-60.32	RMS	35.5	11.8	0	-34.29	-47.31	-41.2	-6.11	-	-	310	103	H
1	7.125	-37.62	Pk	35.5	11.8	0	-34.6	-24.92	-	-	-7	-17.92	310	103	H
3	7.125	-54.62	RMS	35.5	11.8	0	-34.6	-41.92	-27	-14.92	-	-	310	103	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

1.2.4. 802.11be SISO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 106+26 / Index 83)	7095	6	* 7.490313	-47.77	Pk	35.6	11.8	0	-36.01	-36.38	-	-	-21.2	-15.18	124	137	H
			* 7.521269	-60.61	RMS	35.6	11.8	0	-35.86	-49.07	-41.2	-7.87	-	-	124	137	H
			7.125	-46.4	Pk	35.5	11.8	0	-35.98	-35.08	-	-	-7	-28.08	124	137	H
			7.125	-60.82	RMS	35.5	11.8	0	-35.98	-49.5	-27	-22.5	-	-	124	137	H
			* 7.448002	-48.38	Pk	35.6	11.8	0	-36.12	-37.1	-	-	-21.2	-15.9	108	144	V
			* 7.510458	-60.41	RMS	35.6	11.8	0	-35.94	-48.95	-41.2	-7.75	-	-	108	144	V
		5	7.125	-51.71	Pk	35.5	11.8	0	-35.98	-40.39	-	-	-7	-33.39	108	144	V
			7.125	-61.76	RMS	35.5	11.8	0	-35.98	-50.44	-27	-23.44	-	-	108	144	V
			7.125	-50.65	Pk	35.7	11.8	0	-36.34	-39.49	-	-	-7	-32.49	330	164	H
			7.125	-61.21	RMS	35.7	11.8	0	-36.34	-50.05	-27	-23.05	-	-	330	164	H
			* 7.267401	-48.24	Pk	35.7	11.8	0	-36.08	-36.82	-	-	-21.2	-15.62	330	164	H
			* 7.357313	-60.21	RMS	35.6	11.8	0	-36.22	-49.03	-41.2	-7.83	-	-	330	164	H
			7.125	-50.16	Pk	35.7	11.8	0	-36.34	-39	-	-	-7	-32	86	125	V
			7.125	-60.97	RMS	35.7	11.8	0	-36.34	-49.81	-27	-22.81	-	-	86	125	V
			* 7.265457	-48.58	Pk	35.7	11.8	0	-36.1	-37.18	-	-	-21.2	-15.98	86	125	V
			* 7.408568	-60.15	RMS	35.6	11.8	0	-36.25	-49	-41.2	-7.8	-	-	86	125	V
EHT40 (RU 106+26 / Index 85)	7085	6	7.125	-48.24	Pk	35.6	11.8	0	-37.18	-38.02	-	-	-7	-31.02	352	177	H
			7.125	-60.45	RMS	35.6	11.8	0	-37.18	-50.23	-27	-23.23	-	-	352	177	H
			* 7.50688	-46.46	Pk	35.6	11.8	0	-37.47	-36.53	-	-	-21.2	-15.33	352	177	H
			* 7.522202	-59.64	RMS	35.6	11.8	0	-37.37	-49.61	-41.2	-8.41	-	-	352	177	H
			7.125	-48.93	Pk	35.6	11.8	0	-37.18	-38.71	-	-	-7	-31.71	9	121	V
			7.125	-61.1	RMS	35.6	11.8	0	-37.18	-50.88	-27	-23.88	-	-	9	121	V
		5	* 7.521346	-47.64	Pk	35.6	11.8	0	-37.4	-37.64	-	-	-21.2	-16.44	9	121	V
			* 7.524146	-59.5	RMS	35.6	11.8	0	-37.34	-49.44	-41.2	-8.24	-	-	9	121	V
			7.125	-50.58	Pk	35.7	11.8	0	-36.34	-39.42	-	-	-7	-32.42	226	401	H
			7.125	-61.23	RMS	35.7	11.8	0	-36.34	-50.07	-27	-23.07	-	-	226	401	H
			* 7.266935	-48.78	Pk	35.7	11.8	0	-36.09	-37.37	-	-	-21.2	-16.17	226	401	H
			* 7.473435	-59.97	RMS	35.7	11.8	0	-36.3	-48.77	-41.2	-7.57	-	-	226	401	H
			7.125	-50.86	Pk	35.7	11.8	0	-36.34	-39.7	-	-	-7	-32.7	75	291	V
			7.125	-61.27	RMS	35.7	11.8	0	-36.34	-50.11	-27	-23.11	-	-	75	291	V
			* 7.264601	-60.14	RMS	35.7	11.8	0	-36.12	-48.76	-41.2	-7.56	-	-	75	291	V
			* 7.521424	-48.51	Pk	35.7	11.8	0	-36.23	-37.24	-	-	-21.2	-16.04	75	291	V
EHT80 (RU 106+26 / Index 89)	7025	6	* 7.451891	-49.5	Pk	35.6	11.8	0	-32.53	-34.63	-	-	-21.2	-13.43	32	102	H
			* 7.509913	-61.52	RMS	35.6	11.8	0.1	-32.37	-46.39	-41.2	-5.19	-	-	32	102	H
			7.125	-51.7	Pk	35.6	11.8	0	-33.02	-37.32	-	-	-7	-30.32	32	102	H
			7.125	-62.51	RMS	35.6	11.8	0.1	-33.02	-48.03	-27	-21.03	-	-	32	102	H
			* 7.431824	-50.02	Pk	35.6	11.8	0	-32.39	-35.01	-	-	-21.2	-13.81	94	142	V
			* 7.509213	-61.69	RMS	35.6	11.8	0.1	-32.39	-46.58	-41.2	-5.38	-	-	94	142	V
		5	7.125	-51.58	Pk	35.6	11.8	0	-33.02	-37.2	-	-	-7	-30.2	94	142	V
			7.125	-62.59	RMS	35.6	11.8	0.1	-33.02	-48.11	-27	-21.11	-	-	94	142	V
			* 7.439835	-49.89	Pk	35.6	11.8	0	-32.39	-34.88	-	-	-21.2	-13.68	134	229	H
			* 7.509446	-61.7	RMS	35.6	11.8	0.1	-32.39	-46.59	-41.2	-5.39	-	-	134	229	H
			7.125	-51.36	Pk	35.6	11.8	0	-33.02	-36.98	-	-	-7	-29.98	134	229	H
			7.125	-63.16	RMS	35.6	11.8	0.1	-33.02	-48.68	-27	-21.68	-	-	134	229	H
			* 7.388268	-50.08	Pk	35.6	11.8	0	-32.35	-35.03	-	-	-21.2	-13.83	144	174	V
			* 7.515358	-61.71	RMS	35.7	11.8	0.1	-32.41	-46.52	-41.2	-5.32	-	-	144	174	V
			7.125	-51.51	Pk	35.6	11.8	0	-33.02	-37.13	-	-	-7	-30.13	144	174	V
			7.125	-62.91	RMS	35.6	11.8	0.1	-33.02	-48.43	-27	-21.43	-	-	144	174	V
EHT160 (RU 106+26T / Index 89)	6985	6	* 7.295868	-48.12	Pk	35.8	11.8	0	-35.6	-36.12	-	-	-21.2	-14.92	230	106	H
			* 7.30489	-60.79	RMS	35.8	11.8	0	-35.3	-48.49	-41.2	-7.29	-	-	230	106	H
			7.125	-50.31	Pk	35.8	11.8	0	-35.7	-38.41	-	-	-7	-31.41	230	106	H
			7.125	-61.38	RMS	35.8	11.8	0	-35.7	-49.48	-27	-22.48	-	-	230	106	H
			* 7.384146	-48.53	Pk	35.8	11.8	0	-35.51	-36.44	-	-	-21.2	-15.24	312	104	V
			* 7.260168	-60.92	RMS	35.8	11.8	0	-35.3	-48.62	-41.2	-7.42	-	-	312	104	V
		5	7.125	-49.91	Pk	35.8	11.8	0	-35.7	-38.01	-	-	-7	-31.01	312	104	V
			7.125	-61.55	RMS	35.8	11.8	0	-35.7	-49.65	-27	-22.65	-	-	312	104	V
			* 7.301624	-48.89	Pk	35.6	11.8	0	-32.69	-34.18	-	-	-21.2	-12.98	133	285	H
			* 7.500969	-61.44	RMS	35.6	11.8	0	-32.55	-46.59	-41.2	-5.39	-	-	133	285	H
			7.125	-51.88	Pk	35.6	11.8	0	-33.02	-37.5	-	-	-7	-30.5	133	285	H
			7.125	-62.82	RMS	35.6	11.8	0	-33.02	-48.44	-27	-21.44	-	-	133	285	H
			* 7.523758	-49.61	Pk	35.7	11.8	0	-32.59	-34.7	-	-	-21.2	-13.5	151	248	V
			* 7.524535	-61.57	RMS	35.7	11.8	0	-32.58	-46.65	-41.2	-5.45	-	-	151	248	V
			7.125	-51.44	Pk	35.6	11.8	0	-33.02	-37.06	-	-	-7	-30.06	151	248	V
			7.125	-62.97	RMS	35.6	11.8	0	-33.02	-48.59	-27	-21.59	-	-	151	248	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

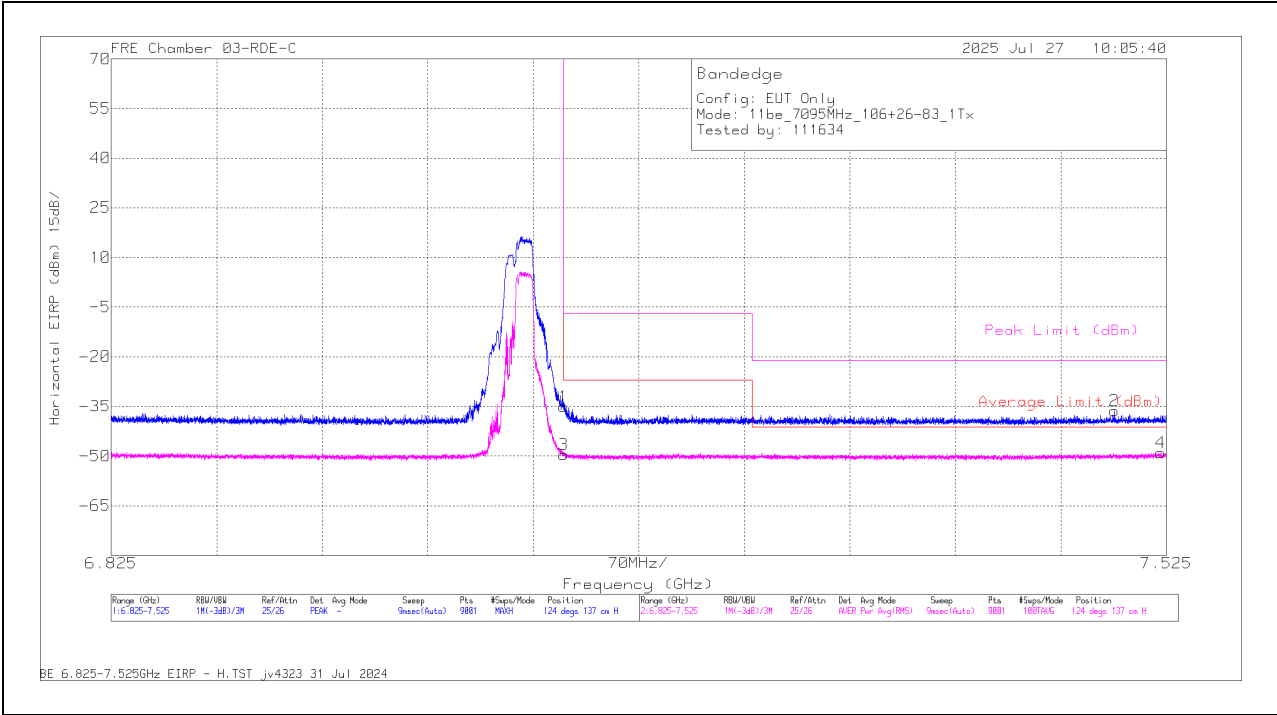
Pk - Peak detector

RMS - RMS detection

1TX Antenna 6 MODE: 106+26-Tone, RU Index 83

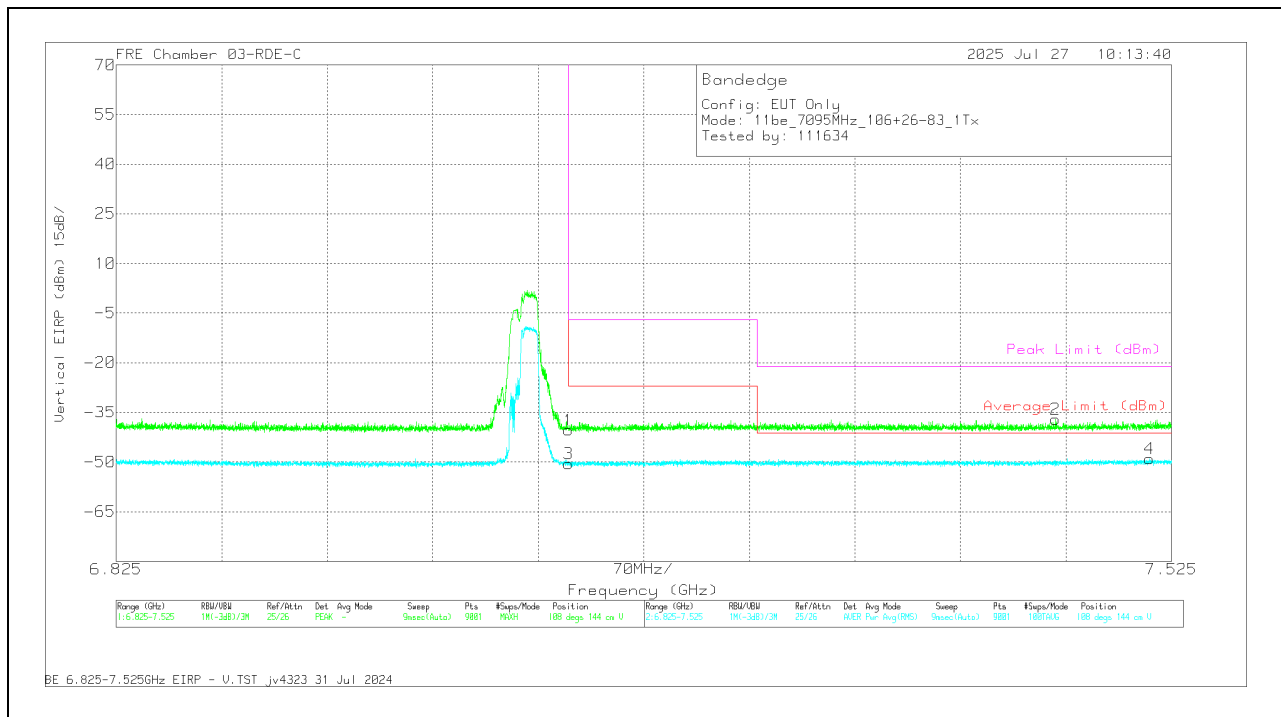
BANDEDGE (HIGH CHANNEL / 7095MHz)

HORIZONTAL RESULT



Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 7.490313	-47.77	Pk	35.6	11.8	0	-36.01	-36.38	-	-	-21.2	-15.18	124	137	H
4	* 7.521269	-60.61	RMS	35.6	11.8	0	-35.86	-49.07	-41.2	-7.87	-	-	124	137	H
1	7.125	-46.4	Pk	35.5	11.8	0	-35.98	-35.08	-	-	-7	-28.08	124	137	H
3	7.125	-60.82	RMS	35.5	11.8	0	-35.98	-49.5	-27	-22.5	-	-	124	137	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
2	* 7.448002	-48.38	Pk	35.6	11.8	0	-36.12	-37.1	-	-	-21.2	-15.9	108	144	V
4	* 7.510458	-60.41	RMS	35.6	11.8	0	-35.94	-48.95	-41.2	-7.75	-	-	108	144	V
1	7.125	-51.71	Pk	35.5	11.8	0	-35.98	-40.39	-	-	-7	-33.39	108	144	V
3	7.125	-61.76	RMS	35.5	11.8	0	-35.98	-50.44	-27	-23.44	-	-	108	144	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

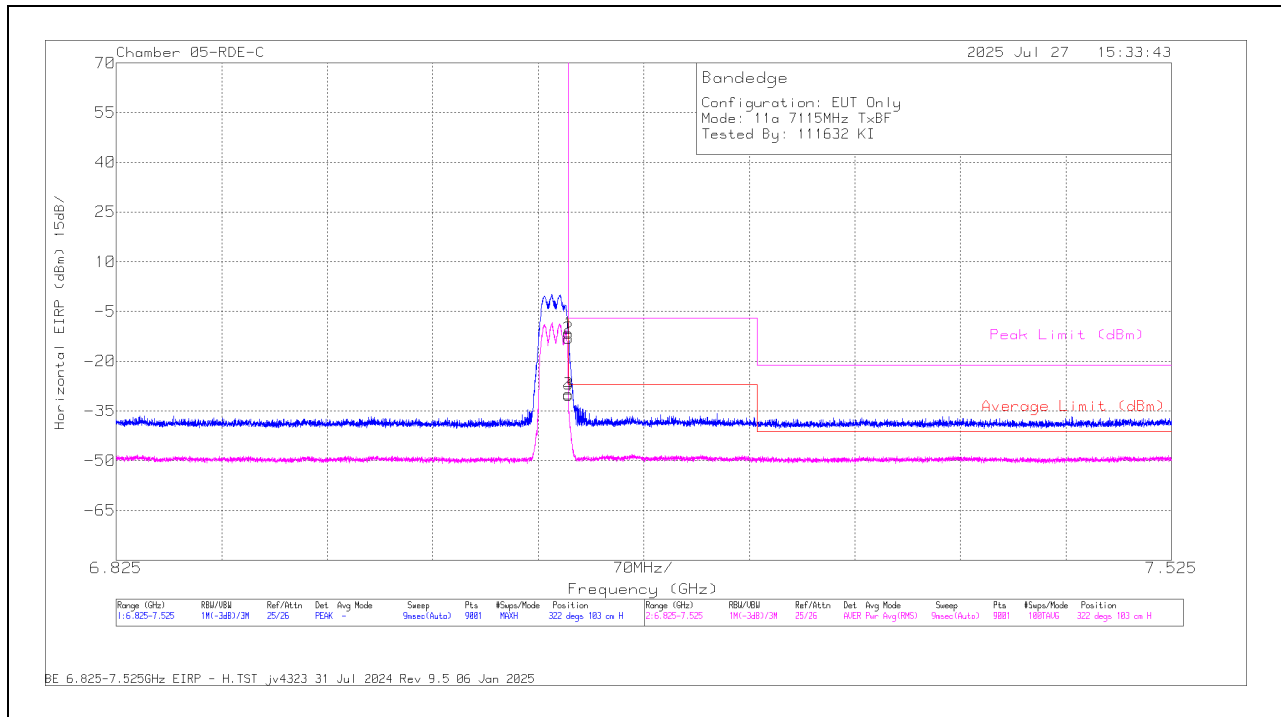
1.2.5. 802.11a MIMO MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a	7115	6+5	7.125	-22.57	Pk	35.7	11.8	0	-36.51	-11.58	-	-	-7	-4.58	322	103	H
			7.125	-40.9	RMS	35.7	11.8	0	-36.51	-29.91	-27	-2.91	-	-	322	103	H
			7.125068	-41.31	RMS	35.7	11.8	0	-36.52	-30.33	-27	-3.33	-	-	322	103	H
			7.125145	-23.95	Pk	35.7	11.8	0	-36.54	-12.99	-	-	-7	-5.99	322	103	H
			7.125	-33.41	Pk	35.7	11.8	0	-36.51	-22.42	-	-	-7	-15.42	51	101	V
			7.125	-48.87	RMS	35.7	11.8	0	-36.51	-37.88	-27	-10.88	-	-	51	101	V
			* 7.457257	-46.3	Pk	35.7	11.8	0	-37.27	-36.07	-	-	-21.2	-14.87	51	101	V
			* 7.514346	-59.07	RMS	35.7	11.8	0	-36.93	-48.5	-41.2	-7.3	-	-	51	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

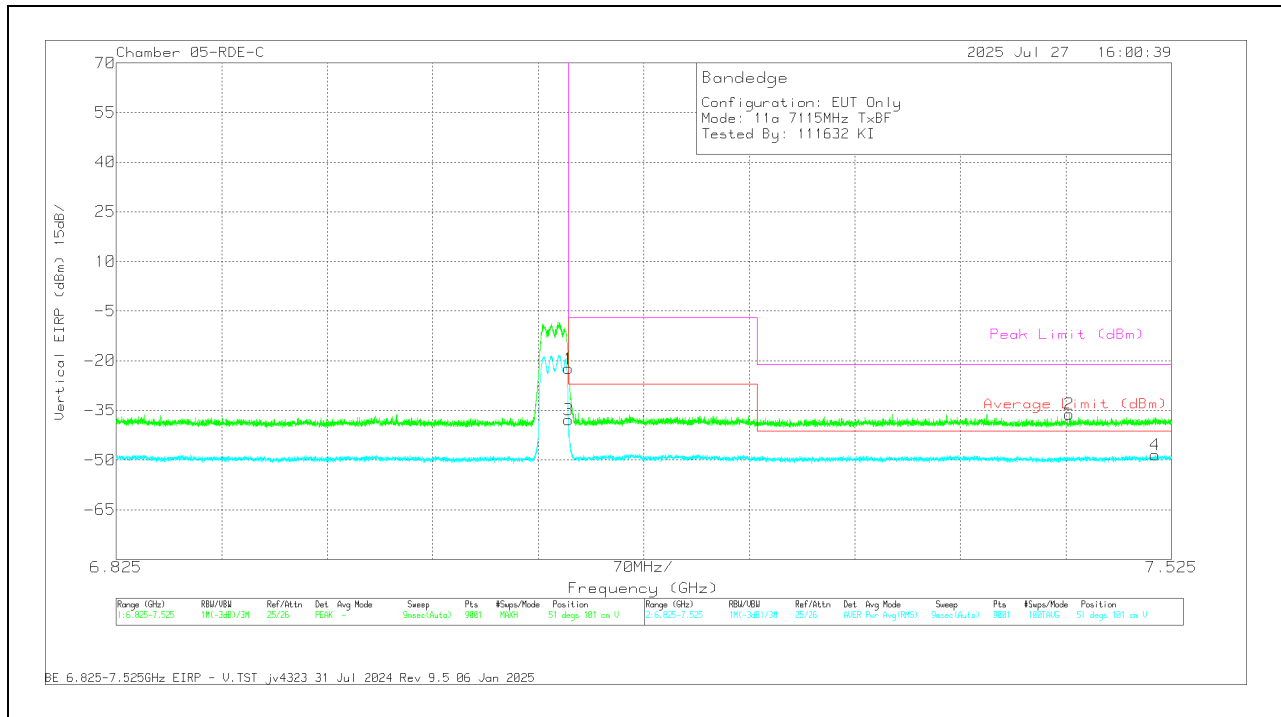
Pk - Peak detector

RMS - RMS detection

2TX Antenna 6+5 MODE: 11a**BANDEDGE (HIGH CHANNEL / 7115MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230300 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-22.57	Pk	35.7	11.8	0	-36.51	-11.58	-	-	-7	-4.58	322	103	H
3	7.125	-40.9	RMS	35.7	11.8	0	-36.51	-29.91	-27	-2.91	-	-	322	103	H
4	7.125068	-41.31	RMS	35.7	11.8	0	-36.52	-30.33	-27	-3.33	-	-	322	103	H
2	7.125145	-23.95	Pk	35.7	11.8	0	-36.54	-12.99	-	-	-7	-5.99	322	103	H

PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230300 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-33.41	Pk	35.7	11.8	0	-36.51	-22.42	-	-	-7	-15.42	51	101	V
3	7.125	-48.87	RMS	35.7	11.8	0	-36.51	-37.88	-27	-10.88	-	-	51	101	V
2	* 7.457257	-46.3	Pk	35.7	11.8	0	-37.27	-36.07	-	-	-21.2	-14.87	51	101	V
4	* 7.514346	-59.07	RMS	35.7	11.8	0	-36.93	-48.5	-41.2	-7.3	-	-	51	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

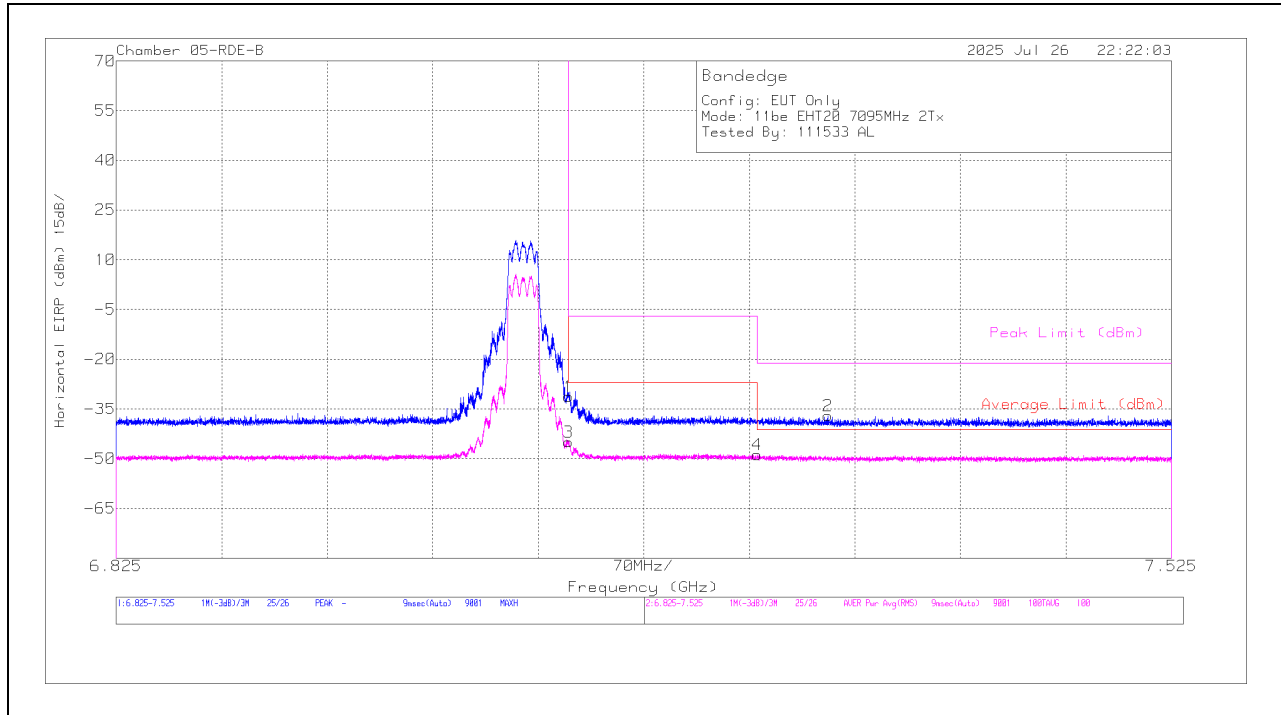
1.2.6. 802.11be MIMO SU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	7095	6 + 5	7.125	-42.46	Pk	35.7	11.8	0	-36.34	-31.3	-	-	-7	-24.3	328	118	H
			7.125	-56.1	RMS	35.7	11.8	0	-36.34	-44.94	-27	-17.94	-	-	328	118	H
			* 7.250135	-60.23	RMS	35.7	11.8	0	-36.09	-48.82	-41.2	-7.62	-	-	328	118	H
			* 7.297346	-48.2	Pk	35.6	11.8	0	-36.2	-37	-	-	-21.2	-15.8	328	118	H
			7.125	-50.27	Pk	35.7	11.8	0	-36.34	-39.11	-	-	-7	-32.11	221	105	V
			7.125	-60.86	RMS	35.7	11.8	0	-36.34	-49.7	-27	-22.7	-	-	221	105	V
			* 7.296257	-47.79	Pk	35.6	11.8	0	-36.22	-36.61	-	-	-21.2	-15.41	221	105	V
			* 7.388268	-59.99	RMS	35.6	11.8	0	-36.26	-48.85	-41.2	-7.65	-	-	221	105	V
EHT40 (SU Mode)	7085	6 + 5	7.125	-28.83	Pk	35.6	11.8	0	-37.18	-18.61	-	-	-7	-11.61	62	230	H
			7.125	-42.77	RMS	35.6	11.8	0	-37.18	-32.55	-27	-5.55	-	-	62	230	H
			7.125768	-42.66	RMS	35.6	11.8	0	-37.16	-32.42	-27	-5.42	-	-	62	230	H
			7.126079	-27.08	Pk	35.6	11.8	0	-37.17	-16.85	-	-	-7	-9.85	62	230	H
			7.125	-32.14	Pk	35.6	11.8	0	-37.18	-21.92	-	-	-7	-14.92	356	197	V
			7.125	-45.99	RMS	35.6	11.8	0	-37.18	-35.77	-27	-8.77	-	-	356	197	V
			7.125068	-30.66	Pk	35.6	11.8	0	-37.18	-20.44	-	-	-7	-13.44	356	197	V
			7.510613	-59.01	RMS	35.6	11.8	0	-37.46	-49.07	-41.2	-7.87	-	-	356	197	V
EHT80 (SU Mode)	7025	6 + 5	* 7506.413	-55.39	Pk	35.6	11.8	0	-27.9	-35.89	-	-	-21.2	-14.69	159	114	H
			* 7506.88	-67.27	RMS	35.6	11.8	0	-27.9	-47.77	-41.2	-6.57	-	-	159	114	H
			7125	-41.34	Pk	35.6	11.8	0	-28.4	-22.34	-	-	-7	-15.34	159	114	H
			7125	-59.73	RMS	35.6	11.8	0	-28.4	-40.73	-27	-13.73	-	-	159	114	H
			* 7369.99	-55.27	Pk	35.6	11.8	0	-27.9	-35.77	-	-	-21.2	-14.57	171	188	V
			* 7495.68	-67.3	RMS	35.6	11.8	0	-27.9	-47.8	-41.2	-6.6	-	-	171	188	V
			7125	-50.6	Pk	35.6	11.8	0	-28.4	-31.6	-	-	-7	-24.6	171	188	V
			7125	-66.02	RMS	35.6	11.8	0	-28.4	-47.02	-27	-20.02	-	-	171	188	V
EHT160 (SU Mode)	6985	6 + 5	7.125	-30.88	Pk	35.5	11.8	0	-35.98	-19.56	-	-	-7	-12.56	97	115	H
			7.125	-44.24	RMS	35.5	11.8	0.14	-35.98	-32.78	-27	-5.78	-	-	97	115	H
			7.129112	-41.87	RMS	35.5	11.8	0.14	-36.01	-30.44	-27	-3.44	-	-	97	115	H
			7.133701	-27.09	Pk	35.5	11.8	0	-36.05	-15.84	-	-	-7	-8.84	97	115	H
			* 7.386713	-47.83	Pk	35.5	11.8	0	-36.06	-36.59	-	-	-21.2	-15.39	172	107	V
			* 7.493657	-60.19	RMS	35.6	11.8	0.14	-36.01	-48.66	-41.2	-7.46	-	-	172	107	V
			7.125	-45.86	Pk	35.5	11.8	0	-35.98	-34.54	-	-	-7	-27.54	172	107	V
			7.125	-59.64	RMS	35.5	11.8	0.14	-35.98	-48.18	-27	-21.18	-	-	172	107	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

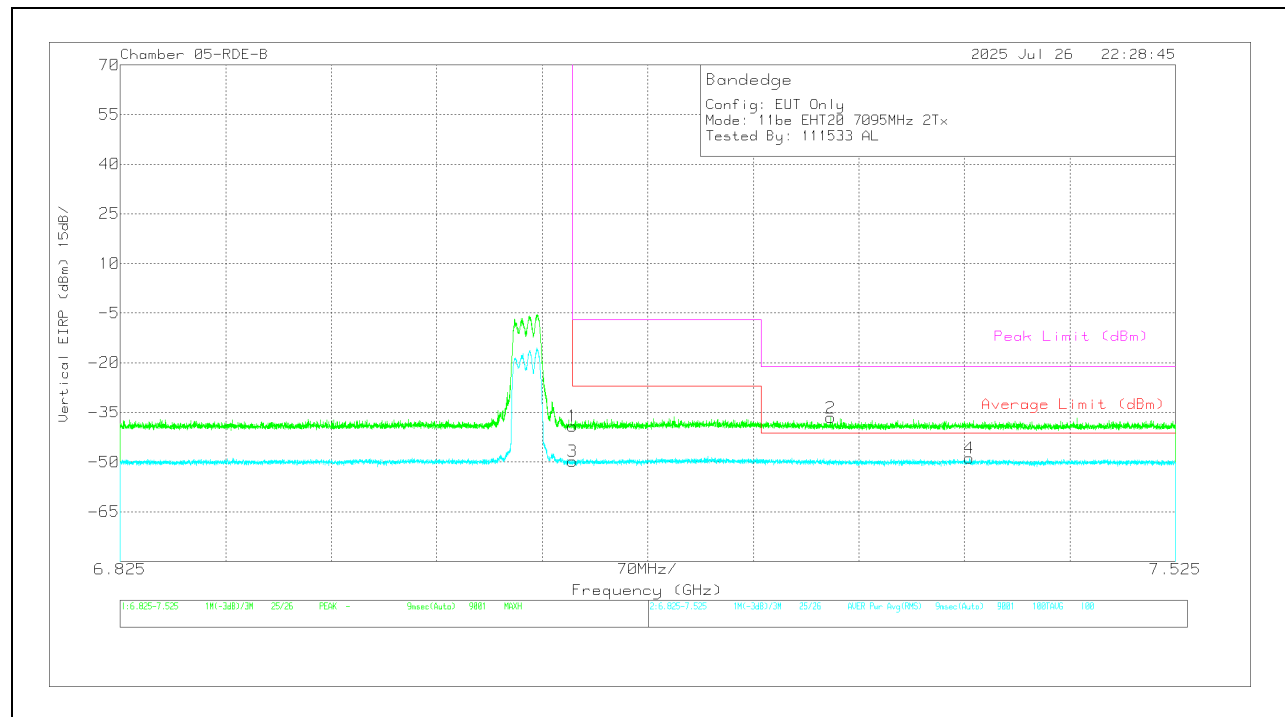
2TX Antenna 6 + Antenna 5 OFDMA MODE: SU**BANDEDGE (HIGH CHANNEL / 7095MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	226672 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-42.46	PK	35.7	11.8	0	-36.34	-31.3	-	-	-7	-24.3	328	118	H
3	7.125	-56.1	RMS	35.7	11.8	0	-36.34	-44.94	-27	-17.94	-	-	328	118	H
4	* 7.250135	-60.23	RMS	35.7	11.8	0	-36.09	-48.82	-41.2	-7.62	-	-	328	118	H
2	* 7.297346	-48.2	PK	35.6	11.8	0	-36.2	-37	-	-	-21.2	-15.8	328	118	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	226672 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-50.27	Pk	35.7	11.8	0	-36.34	-39.11	-	-	-7	-32.11	221	105	V
3	7.125	-60.86	RMS	35.7	11.8	0	-36.34	-49.7	-27	-22.7	-	-	221	105	V
2	* 7.296257	-47.79	Pk	35.6	11.8	0	-36.22	-36.61	-	-	-21.2	-15.41	221	105	V
4	* 7.388268	-59.99	RMS	35.6	11.8	0	-36.26	-48.85	-41.2	-7.65	-	-	221	105	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

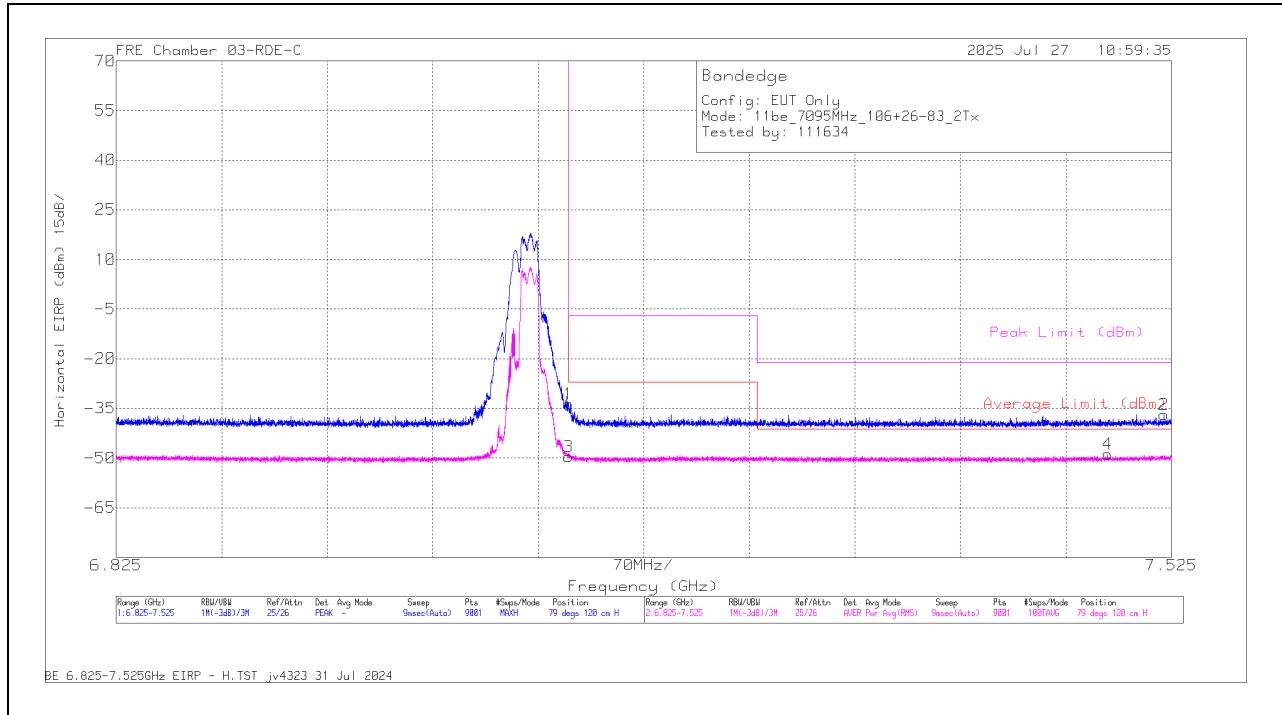
1.2.7. 802.11be MIMO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 106+26 / Index 83)	7095	6 + 5	* 7.519946	-48.44	Pk	35.6	11.8	0	-35.87	-36.91	-	-	-21.2	-15.71	79	120	H
			* 7.482769	-60.14	RMS	35.6	11.8	0	-36.07	-48.81	-41.2	-7.61	-	-	79	120	H
			7.125	-44.93	Pk	35.5	11.8	0	-35.98	-33.61	-	-	-7	-26.61	79	120	H
			7.125	-60.96	RMS	35.5	11.8	0	-35.98	-49.64	-27	-22.64	-	-	79	120	H
			* 7.518391	-48.03	Pk	35.6	11.8	0	-35.91	-36.54	-	-	-21.2	-15.34	106	101	V
			* 7.508513	-60.32	RMS	35.6	11.8	0	-35.95	-48.87	-41.2	-7.67	-	-	106	101	V
			7.125	-51.19	Pk	35.5	11.8	0	-35.98	-39.87	-	-	-7	-32.87	106	101	V
EHT40 (RU 106+26 / Index 85)	7085	6 + 5	7.125	-62.13	RMS	35.5	11.8	0	-35.98	-50.81	-27	-23.81	-	-	106	101	V
			* 7.364702	-49.97	Pk	35.6	11.8	0	-32.52	-35.09	-	-	-21.2	-13.89	30	121	H
			* 7.488446	-61.78	RMS	35.5	11.8	0	-32.37	-46.85	-41.2	-5.65	-	-	30	121	H
			7.125	-46.26	Pk	35.6	11.8	0	-33.02	-31.88	-	-	-7	-24.88	30	121	H
			7.125	-61.4	RMS	35.6	11.8	0	-33.02	-47.02	-27	-20.02	-	-	30	121	H
			* 7.392857	-49.62	Pk	35.6	11.8	0	-32.46	-34.68	-	-	-21.2	-13.48	47	171	V
			* 7.507191	-61.78	RMS	35.6	11.8	0	-32.45	-46.83	-41.2	-5.63	-	-	47	171	V
EHT80 (RU 106+26T / Index 89)	7025	6 + 5	7.125	-52.06	Pk	35.6	11.8	0	-33.02	-37.68	-	-	-7	-30.68	47	171	V
			7.125	-62.55	RMS	35.6	11.8	0	-33.02	-48.17	-27	-21.17	-	-	47	171	V
			* 7.311813	-49.69	Pk	35.5	11.8	0	-32.62	-35.01	-	-	-21.2	-13.81	24	105	H
			* 7.499569	-61.65	RMS	35.6	11.8	0.1	-32.55	-46.7	-41.2	-5.5	-	-	24	105	H
			7.125	-51.97	Pk	35.6	11.8	0	-33.02	-37.59	-	-	-7	-30.59	24	105	H
			7.125	-61.91	RMS	35.6	11.8	0.1	-33.02	-47.43	-27	-20.43	-	-	24	105	H
			* 7.484324	-50.23	Pk	35.6	11.8	0	-32.35	-35.18	-	-	-21.2	-13.98	72	250	V
EHT160 (RU 106+26T / Index 89)	6985	6 + 5	* 7.516058	-61.72	RMS	35.6	11.8	0.1	-32.43	-46.65	-41.2	-5.45	-	-	72	250	V
			7.125	-51.73	Pk	35.6	11.8	0	-33.02	-37.35	-	-	-7	-30.35	72	250	V
			7.125	-62.46	RMS	35.6	11.8	0.1	-33.02	-47.98	-27	-20.98	-	-	72	250	V
			* 7.484091	-50.09	Pk	35.6	11.8	0	-32.35	-35.04	-	-	-21.2	-13.84	25	126	H
			* 7.513958	-61.67	RMS	35.6	11.8	0	-32.39	-46.66	-41.2	-5.46	-	-	25	126	H
			7.125	-51.8	Pk	35.6	11.8	0	-33.02	-37.42	-	-	-7	-30.42	25	126	H
			7.125	-62.32	RMS	35.6	11.8	0	-33.02	-47.94	-27	-20.94	-	-	25	126	H
			* 7.50898	-50.07	Pk	35.6	11.8	0	-32.4	-35.07	-	-	-21.2	-13.87	116	203	V
			* 7.516291	-61.53	RMS	35.7	11.8	0	-32.44	-46.47	-41.2	-5.27	-	-	116	203	V
			7.125	-51.97	Pk	35.6	11.8	0	-33.02	-37.59	-	-	-7	-30.59	116	203	V
			7.125	-62.9	RMS	35.6	11.8	0	-33.02	-48.52	-27	-21.52	-	-	116	203	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

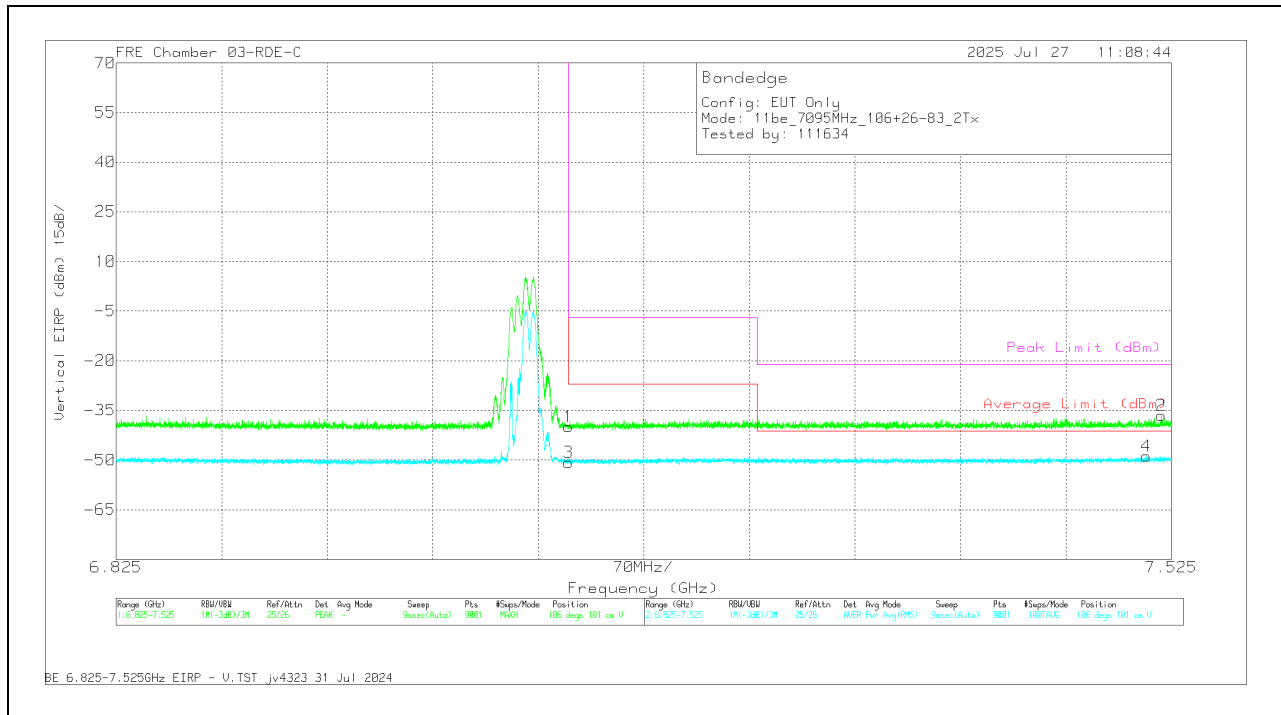
Pk - Peak detector

RMS - RMS detection

2TX Antenna 6 + Antenna 5 OFDMA MODE: 106+26-Tone, RU Index 83**BANDEDGE (HIGH CHANNEL / 7095MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 7.519946	-48.44	Pk	35.6	11.8	0	-35.87	-36.91	-	-	-21.2	-15.71	79	120	H
4	* 7.482769	-60.14	RMS	35.6	11.8	0	-36.07	-48.81	-41.2	-7.61	-	-	79	120	H
1	7.125	-44.93	Pk	35.5	11.8	0	-35.98	-33.61	-	-	-7	-26.61	79	120	H
3	7.125	-60.96	RMS	35.5	11.8	0	-35.98	-49.64	-27	-22.64	-	-	79	120	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 7.518391	-48.03	Pk	35.6	11.8	0	-35.91	-36.54	-	-	-21.2	-15.34	106	101	V
4	* 7.508513	-60.32	RMS	35.6	11.8	0	-35.95	-48.87	-41.2	-7.67	-	-	106	101	V
1	7.125	-51.19	Pk	35.5	11.8	0	-35.98	-39.87	-	-	-7	-32.87	106	101	V
3	7.125	-62.13	RMS	35.5	11.8	0	-35.98	-50.81	-27	-23.81	-	-	106	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

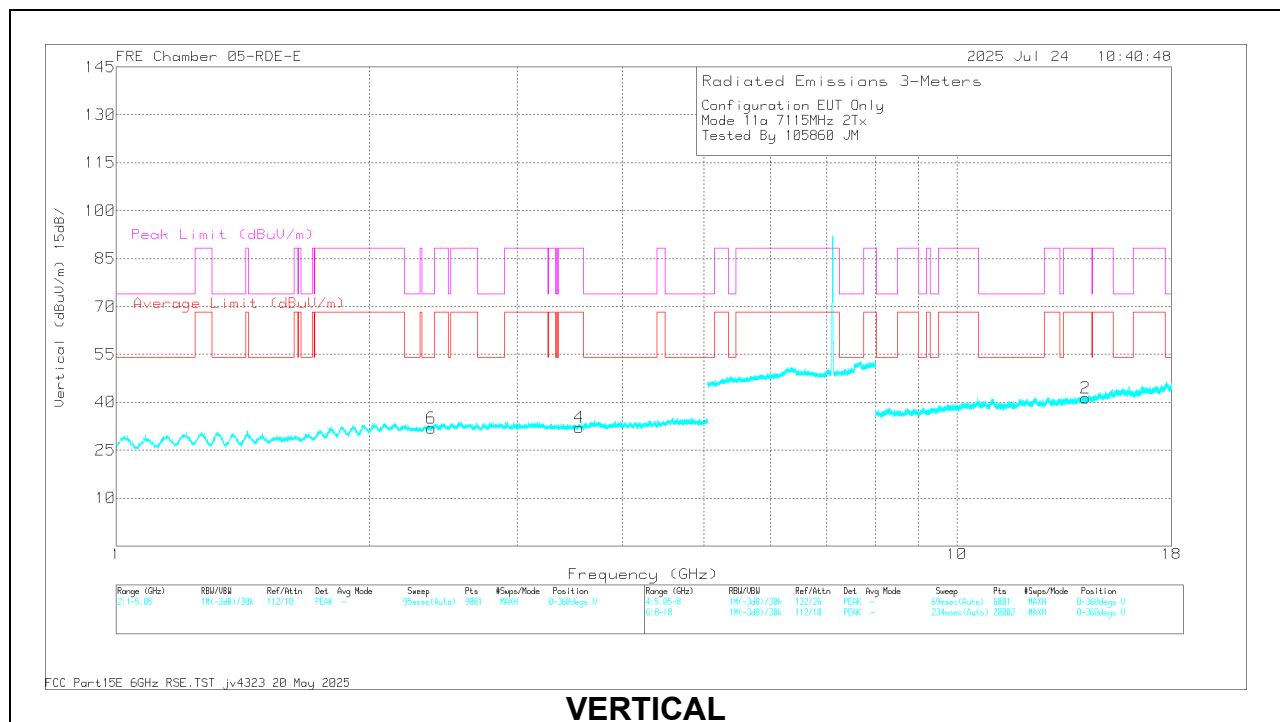
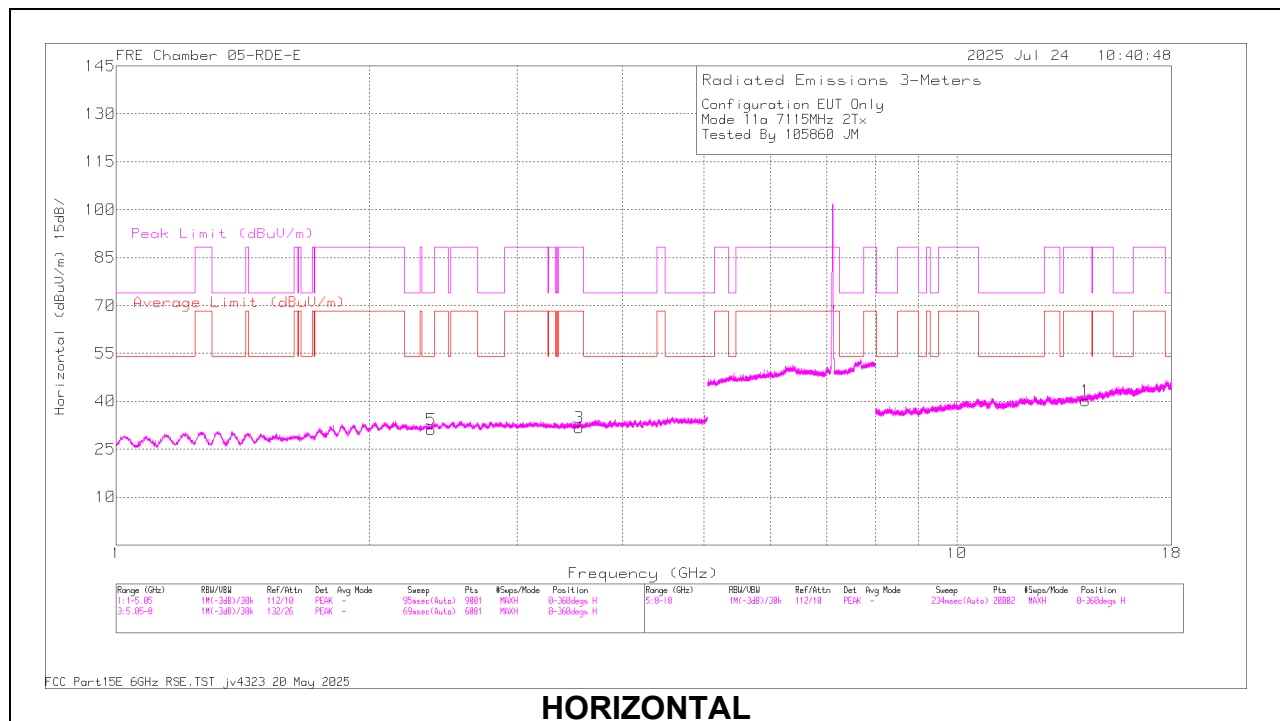
1.2.8. 802.11a MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS**20MHz**

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a mode	7115	6 + 5	* 3.555123	55.09	PK-U	33.1	-45.2	0	42.99	-	-	88.2	-45.21	10	153	H
			* 3.555119	43.72	ADR	33.1	-45.2	0	31.62	68.2	-36.58	-	-	10	153	H
			* 2.374653	57.72	PK-U	32	-47	0	42.72	-	-	74	-31.28	30	358	H
			* 2.375774	45.96	ADR	32	-47	0	30.96	54	-23.04	-	-	30	358	H
			* 3.555311	54.84	PK-U	33.1	-45.2	0	42.74	-	-	88.2	-45.46	164	265	V
			* 3.554888	43	ADR	33.1	-45.2	0	30.9	68.2	-37.3	-	-	164	265	V
			* 2.372853	57.82	PK-U	32	-47	0	42.82	-	-	74	-31.18	269	229	V
			* 2.373673	46.02	ADR	32	-47	0	31.02	54	-22.98	-	-	269	229	V
			14.231039	54.44	PK-U	39.1	-42.3	0	51.24	-	-	88.2	-36.96	10	313	H
			14.233703	42.82	ADR	39.1	-42.3	0	39.62	68.2	-28.58	-	-	10	313	H
			14.231183	54	PK-U	39.1	-42.32	0	50.78	-	-	88.2	-37.42	3	245	V
			14.230903	42.69	ADR	39.1	-42.3	0	39.49	68.2	-28.71	-	-	3	245	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (7115MHz)

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	80404 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.555123	55.09	PK-U	33.1	0	-45.2	42.99	-	-	88.2	-45.21	10	153	H
* 3.555119	43.72	ADR	33.1	0	-45.2	31.62	68.2	-36.58	-	-	10	153	H
* 2.374653	57.72	PK-U	32	0	-47	42.72	-	-	74	-31.28	30	358	H
* 2.375774	45.96	ADR	32	0	-47	30.96	54	-23.04	-	-	30	358	H
* 3.555311	54.84	PK-U	33.1	0	-45.2	42.74	-	-	88.2	-45.46	164	265	V
* 3.554888	43	ADR	33.1	0	-45.2	30.9	68.2	-37.3	-	-	164	265	V
* 2.372853	57.82	PK-U	32	0	-47	42.82	-	-	74	-31.18	269	229	V
* 2.373673	46.02	ADR	32	0	-47	31.02	54	-22.98	-	-	269	229	V
14.231039	54.44	PK-U	39.1	0	-42.3	51.24	-	-	88.2	-36.96	10	313	H
14.233703	42.82	ADR	39.1	0	-42.3	39.62	68.2	-28.58	-	-	10	313	H
14.231183	54	PK-U	39.1	0	-42.32	50.78	-	-	88.2	-37.42	3	245	V
14.230903	42.69	ADR	39.1	0	-42.3	39.49	68.2	-28.71	-	-	3	245	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.2.9. 802.11be MIMO MODE – SPURIOUS EMISSIONS

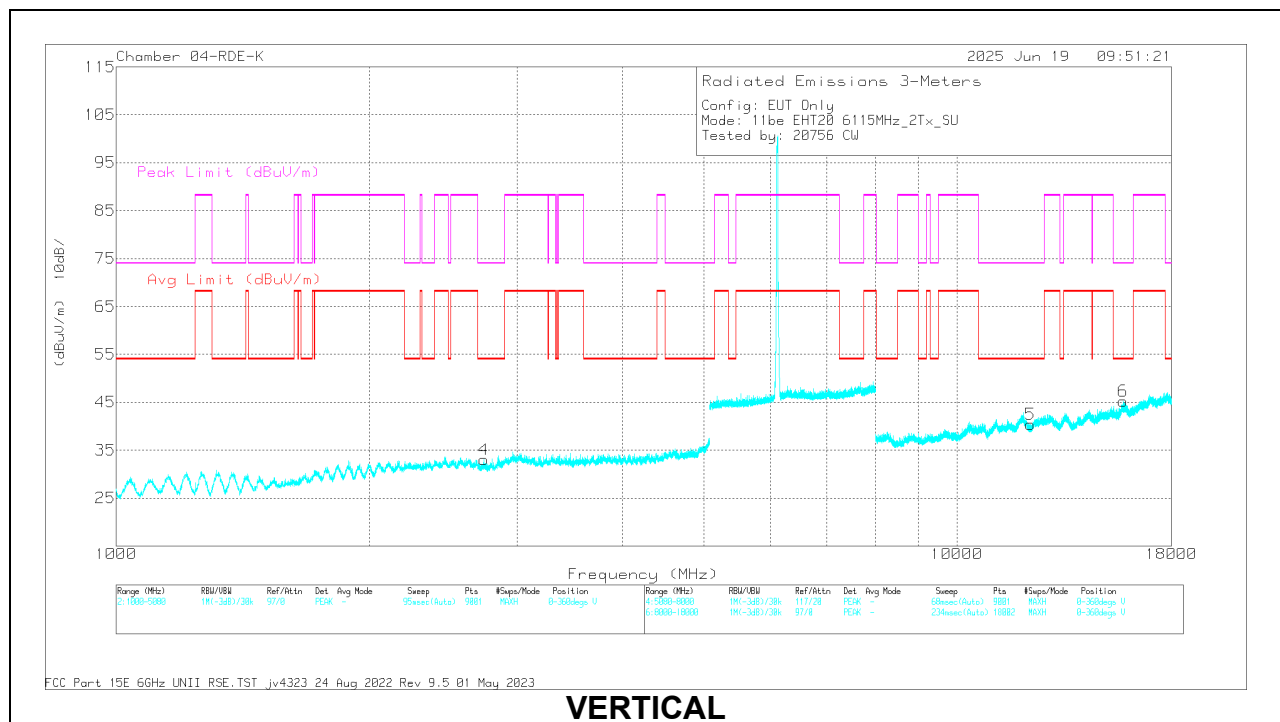
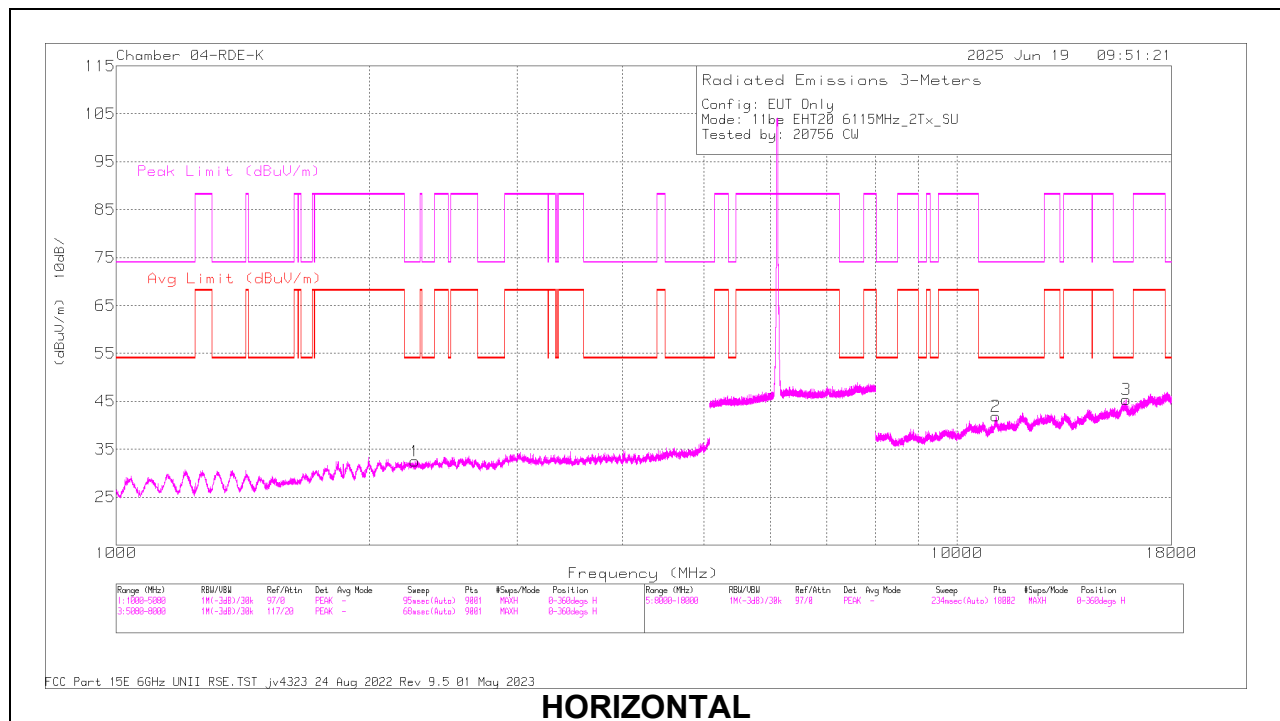
20MHz

UNII-5-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cb/ Filt/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6115 (Low Channel)	6 + 5	* 2.266661	56.18	PK-U	31.8	-44.7	0	43.28	-	-	74	-30.72	243	142	H
			* 2.267597	43.51	ADR	31.8	-44.7	0	30.61	54	-23.39	-	-	243	142	H
			* 2.73765	53.41	PK-U	32.1	-43.2	0	42.31	-	-	74	-31.69	109	206	V
			* 2.738103	42.03	ADR	32.1	-43.2	0	30.93	54	-23.07	-	-	109	206	V
			* 11.129376	48.53	PK-U	37.9	-35.8	0	50.63	-	-	74	-23.37	355	267	H
			* 11.130136	37.1	ADR	37.9	-35.9	0	39.1	54	-14.9	-	-	355	267	H
			* 15.909561	47.45	PK-U	40.5	-33.2	0	54.75	-	-	74	-19.25	206	289	H
			* 15.909832	35.65	ADR	40.5	-33.2	0	42.95	54	-11.05	-	-	206	289	H
			* 12.23679	46.22	PK-U	38.8	-34.6	0	50.42	-	-	74	-23.58	107	233	V
			* 12.235999	34.53	ADR	38.8	-34.6	0	38.73	54	-15.27	-	-	107	233	V
			* 15.763628	47.6	PK-U	40.4	-33.7	0	54.3	-	-	74	-19.7	94	271	V
			* 15.763521	35.9	ADR	40.4	-33.7	0	42.6	54	-11.4	-	-	94	271	V
	6535 (Mid Channel)	6 + 5	* 3.860573	52.1	PK-U	33.6	-41.4	0	44.3	-	-	74	-29.7	198	270	H
			* 3.85918	40.39	ADR	33.6	-41.4	0	32.59	54	-21.41	-	-	198	270	H
			* 2.792914	53.63	PK-U	32.2	-43.2	0	42.63	-	-	74	-31.37	237	387	V
			* 2.792504	42.08	ADR	32.2	-43.2	0	31.08	54	-22.92	-	-	237	387	V
			* 11.320705	48.45	PK-U	38	-36.2	0	50.25	-	-	74	-23.75	136	400	H
			* 11.319933	36.68	ADR	38	-36.2	0	38.48	54	-15.52	-	-	136	400	H
			* 15.493005	47.4	PK-U	40.2	-33.6	0	54	-	-	74	-20	192	390	H
			* 15.492762	34.82	ADR	40.2	-33.6	0	41.42	54	-12.58	-	-	192	390	H
			* 11.918336	47.29	PK-U	38.6	-34.9	0	50.99	-	-	74	-23.01	93	391	V
			* 11.916869	36.02	ADR	38.6	-34.9	0	39.72	54	-14.28	-	-	93	391	V
			* 15.967372	46.91	PK-U	40.6	-33.5	0	54.01	-	-	74	-19.99	87	280	V
			* 15.967029	35.03	ADR	40.6	-33.5	0	42.13	54	-11.87	-	-	87	280	V
	7095 (High Channel)	6 + 5	* 3.549779	54.8	PK-U	33	-45.08	0	42.72	-	-	88.2	-45.48	221	341	H
			* 3.547484	43.45	ADR	33	-45.1	0	31.35	68.2	-36.85	-	-	221	341	H
			* 2.36295	57.83	PK-U	31.9	-47	0	42.73	-	-	74	-31.27	122	325	H
			* 2.363611	46.05	ADR	31.9	-47	0	30.95	54	-23.05	-	-	122	325	H
			* 3.547214	54.78	PK-U	33	-45.1	0	42.68	-	-	88.2	-45.52	171	215	V
			* 3.545355	43.43	ADR	33	-45.16	0	31.27	68.2	-36.93	-	-	171	215	V
			* 2.362892	57.42	PK-U	31.9	-47	0	42.32	-	-	74	-31.68	353	108	V
			* 2.36277	46.05	ADR	31.9	-47	0	30.95	54	-23.05	-	-	353	108	V
			14.191185	54.21	PK-U	39.1	-42.5	0	50.81	-	-	88.2	-37.39	128	147	H
			14.192821	42.63	ADR	39.1	-42.34	0	39.39	68.2	-28.81	-	-	128	147	H
			14.19288	54.28	PK-U	39.1	-42.32	0	51.06	-	-	88.2	-37.14	345	220	V
			14.190731	42.64	ADR	39.1	-42.45	0	39.29	68.2	-28.91	-	-	345	220	V
11be (Partial RU Mode / Highest PSD)	6115 (106T) (Low Channel)	6 + 5	2.11207	61.03	PK-U	31.9	-50.21	0	42.72	-	-	88.2	-45.48	167	278	H
			2.106444	49.29	ADR	31.9	-50.2	0.1	31.09	68.2	-37.11	-	-	167	278	H
			3.124643	58.63	PK-U	33.2	-48.13	0	43.7	-	-	88.2	-44.5	336	348	H
			3.157173	46.37	ADR	33.5	-47.83	0.1	32.14	68.2	-36.06	-	-	336	348	H
			2.107495	60.83	PK-U	31.9	-50.2	0	42.53	-	-	88.2	-45.67	134	242	V
			2.110188	49.5	ADR	31.9	-50.19	0.1	31.31	68.2	-36.89	-	-	134	242	V
			3.134916	57.91	PK-U	33.4	-48.02	0	43.29	-	-	88.2	-44.91	141	391	V
			3.160083	46.57	ADR	33.5	-47.88	0.1	32.29	68.2	-35.91	-	-	141	391	V
			12.420766	53.44	PK-U	38.8	-43.32	0	48.92	-	-	74	-25.08	250	119	H
			12.415734	41.62	ADR	38.8	-43.45	0.1	37.07	54	-16.93	-	-	250	119	H
			12.402017	54.16	PK-U	38.7	-43.38	0	49.48	-	-	74	-24.52	16	289	V
			12.411488	42.24	ADR	38.8	-43.48	0.1	37.66	54	-16.34	-	-	16	289	V
	6535 (106T+26) (Mid Channel)	6 + 5	2.16911	49.2	ADR	31.8	-50.37	0.1	30.73	68.2	-37.47	-	-	200	131	H
			2.171009	49.11	ADR	31.8	-50.36	0.1	30.65	68.2	-37.55	-	-	5	280	V
			2.171588	61.13	PK-U	31.8	-50.34	0	42.59	-	-	88.2	-45.61	200	131	H
			2.172266	60.95	PK-U	31.8	-50.34	0	42.41	-	-	88.2	-45.79	5	280	V
			3.257887	46.68	ADR	33.1	-47.99	0.1	31.89	68.2	-36.31	-	-	263	322	H
			3.258366	58.03	PK-U	33.1	-47.99	0	43.14	-	-	88.2	-45.06	263	322	H
			3.259095	46.84	ADR	33.1	-47.99	0.1	32.05	68.2	-36.15	-	-	136	305	V
			3.260748	58.22	PK-U	33.1	-48.02	0	43.3	-	-	74	-30.7	136	305	V
			13.055531	44.14	ADR	39.1	-44.6	0.1	38.74	68.2	-29.46	-	-	164	243	V
			13.055966	55.48	PK-U	39.1	-44.6	0	49.98	-	-	88.2	-38.22	164	243	V
			13.058634	55.34	PK-U	39.1	-44.59	0	49.85	-	-	88.2	-38.35	256	180	H
			13.059201	44.15	ADR	39.1	-44.59	0.1	38.76	68.2	-29.44	-	-	256	180	H
	7095 (106T+26) (High Channel)	6 + 5	3.546641	57.61	PK-U	33.2	-47.55	0	43.26	-	-	88.2	-44.94	342	232	H
			3.555836	45.77	ADR	33.2	-47.59	0.1	31.48	68.2	-36.72	-	-	342	232	H
			* 2.377943	61.12	PK-U	32.2	-49.9	0	43.42	-	-	74	-30.58	20	310	H
			* 2.353613	48.69	ADR	32.2	-49.93	0.1	31.06	54	-22.94	-	-	20	310	H
			3.55773	57.63	PK-U	33.2	-47.58	0	43.25	-	-	88.2	-44.95	209	212	V
			3.551597	45.84	ADR	33.2	-47.56	0.1	31.58	68.2	-36.62	-	-	209	212	V
			* 2.367452	60.71	PK-U	32.2	-49.88	0	43.03	-	-	74	-30.97	195	291	V
			* 2.382188	48.61	ADR	32.3	-49.96	0.1	31.05	54	-22.95	-	-	195	291	V
			14.196906	55.19	PK-U	39.1	-43.87	0	50.42	-	-	88.2	-37.78	33	242	H
			14.195322	43.34	ADR	39.1	-43.85	0.1	38.69	68.2	-29.51	-	-	33	242	H
			14.192127	55.02	PK-U	39.2	-43.74	0	50.48	-	-	88.2	-37.72	231	243	V
			14.199462	43.4	ADR	39.1	-43.93	0.1	38.67	68.2	-29.53	-	-	231	243	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6115MHz)

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	206808 ACF (dBm)	Amp/Cbl/Fitr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.266661	56.18	PK-U	31.8	-44.7	0	43.28	-	-	74	-30.72	243	142	H
* 2.267597	43.51	ADR	31.8	-44.7	0	30.61	54	-23.39	-	-	243	142	H
* 2.73765	53.41	PK-U	32.1	-43.2	0	42.31	-	-	74	-31.69	109	206	V
* 2.738103	42.03	ADR	32.1	-43.2	0	30.93	54	-23.07	-	-	109	206	V
* 11.129376	48.53	PK-U	37.9	-35.8	0	50.63	-	-	74	-23.37	355	267	H
* 11.130136	37.1	ADR	37.9	-35.9	0	39.1	54	-14.9	-	-	355	267	H
* 15.909561	47.45	PK-U	40.5	-33.2	0	54.75	-	-	74	-19.25	206	289	H
* 15.909832	35.65	ADR	40.5	-33.2	0	42.95	54	-11.05	-	-	206	289	H
* 12.23679	46.22	PK-U	38.8	-34.6	0	50.42	-	-	74	-23.58	107	233	V
* 12.235999	34.53	ADR	38.8	-34.6	0	38.73	54	-15.27	-	-	107	233	V
* 15.763628	47.6	PK-U	40.4	-33.7	0	54.3	-	-	74	-19.7	94	271	V
* 15.763521	35.9	ADR	40.4	-33.7	0	42.6	54	-11.4	-	-	94	271	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

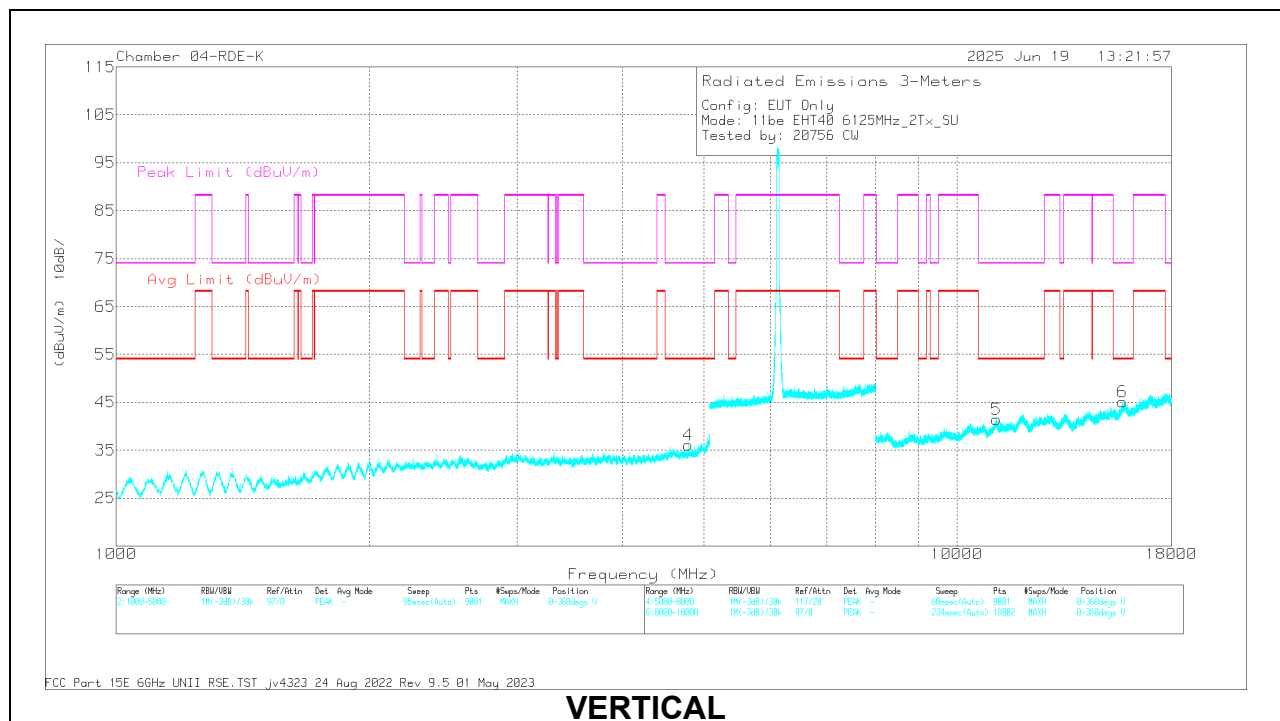
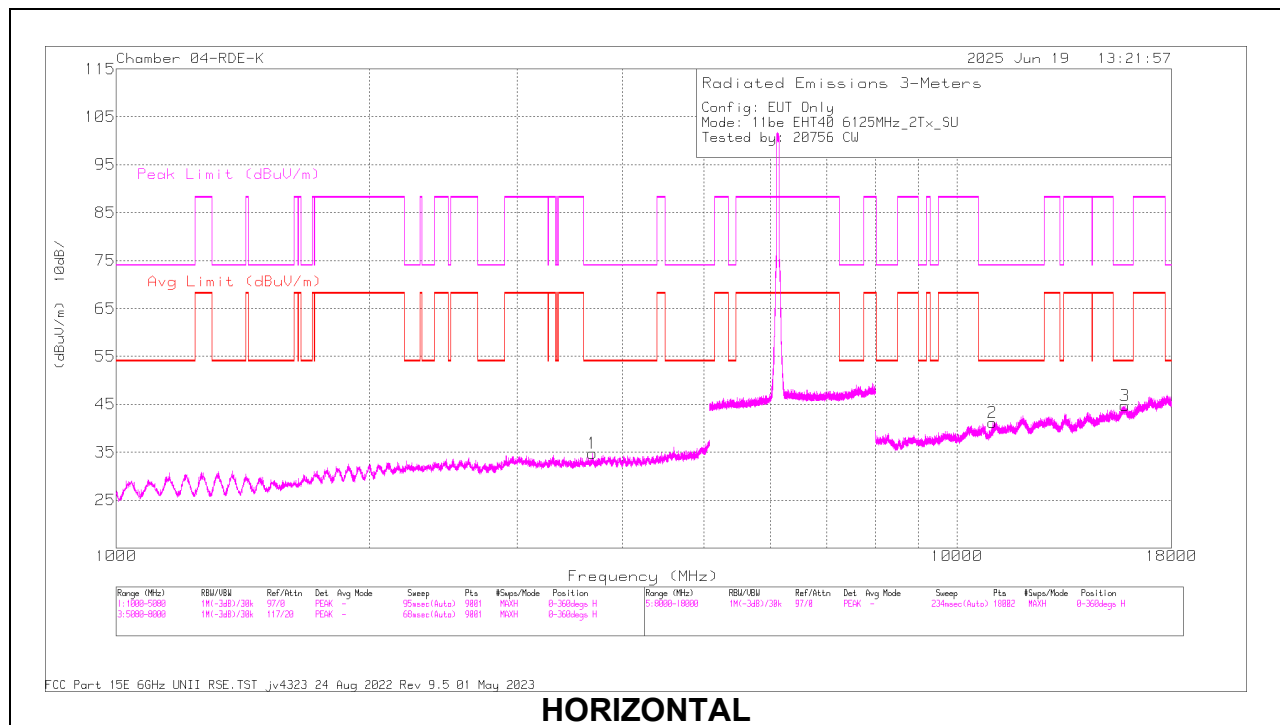
40MHz

UNII-5.8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filt/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6125 (Low Channel)	6 + 5	* 3.684406	52.26	PK-U	33.6	-41.8	0	44.06	-	-	74	-29.94	7	172	H
			* 3.683722	40.49	ADR	33.6	-41.8	0	32.29	54	-21.71	-	-	7	172	H
			* 4.794595	50.95	PK-U	34.2	-40.3	0	44.85	-	-	74	-29.15	354	151	V
			* 4.795984	39.5	ADR	34.2	-40.2	0	33.5	54	-20.5	-	-	354	151	V
			* 11.024127	47.9	PK-U	37.8	-36.5	0	49.2	-	-	74	-24.8	301	101	H
			* 11.026163	36.26	ADR	37.8	-36.5	0	37.56	54	-16.44	-	-	301	101	H
			* 15.851205	46.99	PK-U	40.5	-33.4	0	54.09	-	-	74	-19.91	9	123	H
			* 15.851027	35.4	ADR	40.5	-33.4	0	42.5	54	-11.5	-	-	9	123	H
			* 11.140756	48.67	PK-U	37.9	-35.8	0	50.77	-	-	74	-23.23	257	197	V
			* 11.140997	37.06	ADR	37.9	-35.8	0	39.16	54	-14.84	-	-	257	197	V
			* 15.749956	46.56	PK-U	40.4	-33.6	0	53.36	-	-	74	-20.64	120	394	V
			* 15.747703	35.06	ADR	40.4	-33.5	0	41.96	54	-12.04	-	-	120	394	V
			* 1.317547	58.73	PK-U	28.7	-46.1	0	41.33	-	-	74	-32.67	122	202	H
			* 1.317199	46.71	ADR	28.7	-46.1	0	29.31	54	-24.69	-	-	122	202	H
			* 1.374135	58.51	PK-U	28.4	-46	0	40.91	-	-	74	-33.09	144	349	V
	6525 (Mid Channel)	6 + 5	* 1.375982	46.74	ADR	28.4	-46	0	29.14	54	-24.86	-	-	144	349	V
			* 11.089682	47.97	PK-U	37.8	-36.3	0	49.47	-	-	74	-24.53	165	138	H
			* 11.089032	36.73	ADR	37.8	-36.3	0	38.23	54	-15.77	-	-	165	138	H
			* 15.797224	47.53	PK-U	40.4	-33.7	0	54.23	-	-	74	-19.77	124	352	H
			* 15.797347	36.01	ADR	40.4	-33.7	0	42.71	54	-11.29	-	-	124	352	H
			* 11.126365	48.77	PK-U	37.9	-35.9	0	50.77	-	-	74	-23.23	214	224	V
			* 11.125864	37.1	ADR	37.9	-35.9	0	39.1	54	-14.9	-	-	214	224	V
			* 15.841116	47.5	PK-U	40.5	-33.4	0	54.6	-	-	74	-19.4	236	258	V
			* 15.841106	36.06	ADR	40.5	-33.4	0	43.16	54	-10.84	-	-	236	258	V
			* 3.795501	52.35	PK-U	33.5	-41.7	0	44.15	-	-	74	-29.85	241	224	H
			* 3.795673	40.77	ADR	33.5	-41.7	0	32.57	54	-21.43	-	-	241	224	H
			* 4.068397	52.36	PK-U	33.5	-41.6	0	44.26	-	-	74	-29.74	259	122	V
			* 4.070101	40.37	ADR	33.5	-41.6	0	32.27	54	-21.73	-	-	259	122	V
			* 11.085147	48.71	PK-U	37.8	-36.3	0	50.21	-	-	74	-23.79	60	272	H
	7085 (High Channel)	6 + 5	* 11.084416	37.01	ADR	37.8	-36.3	0	38.51	54	-15.49	-	-	60	272	H
			* 15.743245	46.46	PK-U	40.4	-33.4	0	53.46	-	-	74	-20.54	341	114	H
			* 15.742979	35.2	ADR	40.4	-33.4	0	42.2	54	-11.8	-	-	341	114	H
			* 11.945707	46.71	PK-U	38.7	-34.5	0	50.91	-	-	74	-23.09	343	129	V
			* 11.945268	35.37	ADR	38.7	-34.5	0	39.57	54	-14.43	-	-	343	129	V
			* 15.721926	46.79	PK-U	40.4	-33.4	0	53.79	-	-	74	-20.21	164	196	V
			* 15.721763	35.6	ADR	40.4	-33.4	0	42.6	54	-11.4	-	-	164	196	V
11be (Partial RU Mode / Highest PSD)	6125 (106+26T) (Low Channel)	6 + 5	2.045455	56.74	PK-U	31.8	-46.5	0	42.04	-	-	88.2	-46.16	63	238	H
			2.046563	45.23	ADR	31.8	-46.5	0	30.53	68.2	-37.67	-	-	63	238	H
			3.07599	56.03	PK-U	33	-46.2	0	42.83	-	-	88.2	-45.37	53	279	H
			3.077362	44.63	ADR	33	-46.2	0	31.43	68.2	-36.77	-	-	53	279	H
			2.045281	57.08	PK-U	31.8	-46.5	0	42.38	-	-	88.2	-45.82	347	231	V
			2.043585	45.42	ADR	31.8	-46.5	0	30.72	68.2	-37.48	-	-	347	231	V
			3.069958	56.69	PK-U	33	-46.2	0	43.49	-	-	88.2	-44.71	152	279	V
			3.071334	44.47	ADR	33	-46.2	0	31.27	68.2	-36.93	-	-	152	279	V
			* 12.270569	52.65	PK-U	38.6	-41.24	0	50.01	-	-	74	-23.99	293	246	H
			* 12.270367	41.66	ADR	38.6	-41.26	0	39	54	-15	-	-	293	246	H
			* 12.304264	52.3	PK-U	38.6	-41.23	0	49.67	-	-	74	-24.33	5	210	V
			* 12.30514	40.8	ADR	38.6	-41.29	0	38.11	54	-15.89	-	-	5	210	V
	6525 (106+26T) (Mid Channel)	6 + 5	2.167849	56.97	PK-U	31.7	-46.6	0	42.07	-	-	88.2	-46.13	222	335	H
			2.168052	45.49	ADR	31.7	-46.6	0	30.59	68.2	-37.61	-	-	222	335	H
			* 3.261167	55.22	PK-U	32.9	-45.22	0	42.9	-	-	74	-31.1	160	301	H
			* 3.266657	43.76	ADR	32.9	-45.2	0	31.46	54	-22.54	-	-	160	301	H
			2.173892	57.04	PK-U	31.7	-46.51	0	42.23	-	-	88.2	-45.97	339	211	V
			2.175957	45.41	ADR	31.7	-46.5	0	30.61	68.2	-37.59	-	-	339	211	V
			3.254863	55.41	PK-U	32.9	-45.2	0	43.11	-	-	88.2	-45.09	147	182	V
			3.257082	43.78	ADR	32.9	-45.2	0	31.48	68.2	-36.72	-	-	147	182	V
			13.052565	53.42	PK-U	38.8	-41.8	0	50.42	-	-	88.2	-37.78	87	273	H
			13.05159	41.85	ADR	38.8	-41.76	0	38.89	68.2	-29.31	-	-	87	273	H
			13.065694	53.27	PK-U	38.8	-41.84	0	50.23	-	-	88.2	-37.97	234	146	V
			13.067044	41.55	ADR	38.8	-41.79	0	38.56	68.2	-29.64	-	-	234	146	V
	7085 (106+26T) (High Channel)	6 + 5	* 2.360633	57.52	PK-U	31.9	-46.94	0	42.48	-	-	74	-31.52	189	242	H
			* 2.358166	45.79	ADR	31.9	-47	0	30.69	54	-23.31	-	-	189	242	H
			* 3.538428	54.67	PK-U	33	-45.14	0	42.53	-	-	88.2	-45.67	173	176	H
			* 3.540574	42.93	ADR	33	-45.1	0	30.83	68.2	-37.37	-	-	173	176	H
			* 2.358183	57.47	PK-U	31.9	-47	0	42.37	-	-	74	-31.63	8	366	V
			* 2.359888	45.81	ADR	31.9	-47	0	30.71	54	-23.29	-	-	8	366	V
			* 3.537535	56.02	PK-U	33	-45.1	0	43.92	-	-	88.2	-44.28	68	291	V
			* 3.53881	43.03	ADR	33	-45.18	0	30.85	68.2	-37.35	-	-	68	291	V
			14.166486	55.2	PK-U	39.1	-42.6	0	51.7	-	-	88.2	-36.5	277	132	H
			14.167547	42.85	ADR	39.1	-42.5	0	39.45	68.2	-28.75	-	-	277	132	H
			14.178548	54.1	PK-U	39.1	-42.3	0	50.9	-	-	88.2	-37.3	145	201	V
			14.180253	42.66	ADR	39.1	-42.3	0	39.46	68.2	-28.74	-	-	145	201	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6125MHz)

RADIATED EMISSIONS**Radiated Emissions**

Frequency (GHz)	Meter Reading (dBuV)	Det	206808 ACF (dB/m)	Amp/CbI/Filtr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degr)	Height (cm)	Polarity
* 3.684406	52.26	PK-U	33.6	-41.8	0	44.06	-	-	74	-29.94	7	172	H
* 3.683722	40.49	ADR	33.6	-41.8	0	32.29	54	-21.71	-	-	7	172	H
* 4.794595	50.95	PK-U	34.2	-40.3	0	44.85	-	-	74	-29.15	354	151	V
* 4.795984	39.5	ADR	34.2	-40.2	0	33.5	54	-20.5	-	-	354	151	V
* 11.024127	47.9	PK-U	37.8	-36.5	0	49.2	-	-	74	-24.8	301	101	H
* 11.026163	36.26	ADR	37.8	-36.5	0	37.56	54	-16.44	-	-	301	101	H
* 15.851205	46.99	PK-U	40.5	-33.4	0	54.09	-	-	74	-19.91	9	123	H
* 15.851027	35.4	ADR	40.5	-33.4	0	42.5	54	-11.5	-	-	9	123	H
* 11.140756	48.67	PK-U	37.9	-35.8	0	50.77	-	-	74	-23.23	257	197	V
* 11.140997	37.06	ADR	37.9	-35.8	0	39.16	54	-14.84	-	-	257	197	V
* 15.749956	46.56	PK-U	40.4	-33.6	0	53.36	-	-	74	-20.64	120	394	V
* 15.747703	35.06	ADR	40.4	-33.5	0	41.96	54	-12.04	-	-	120	394	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

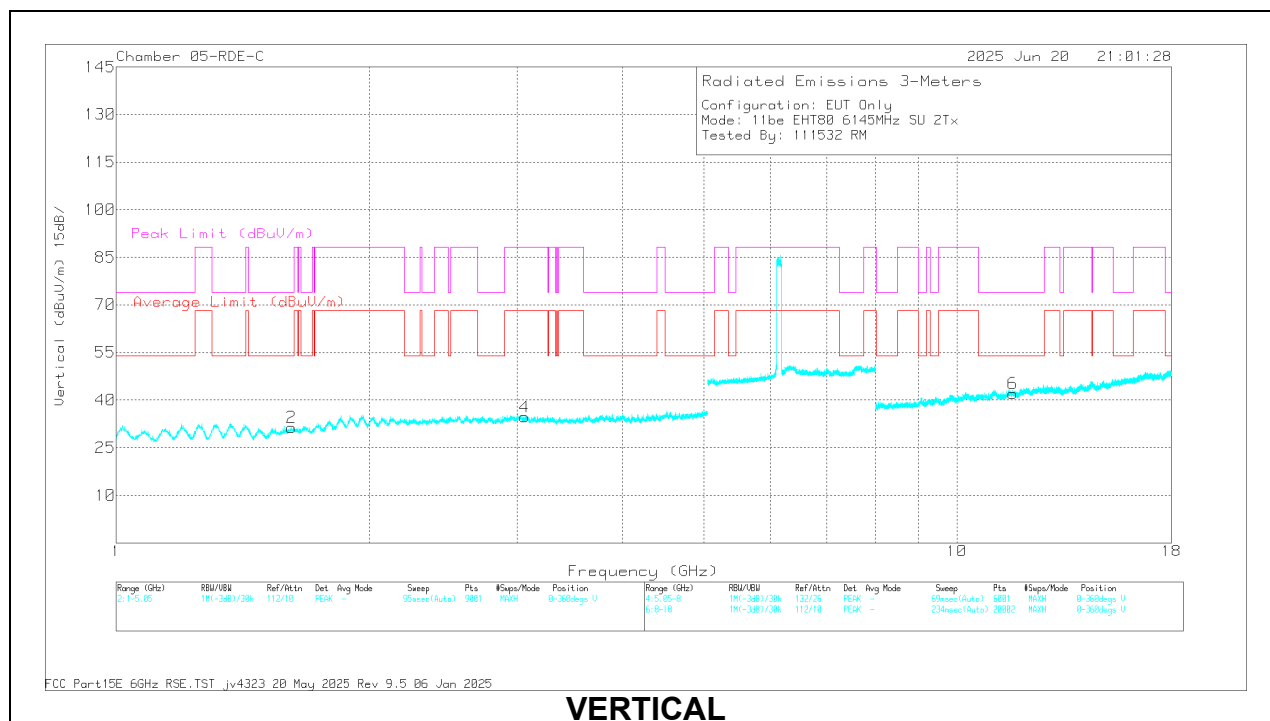
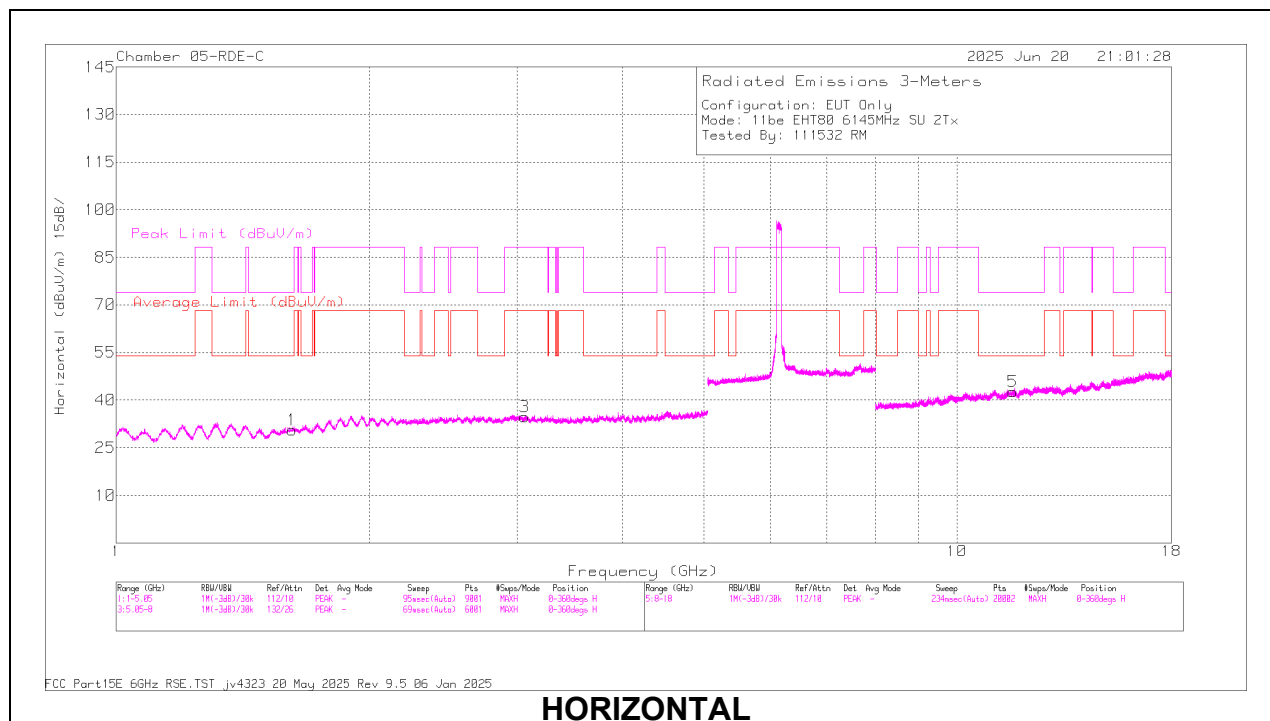
80MHz

UNII-5.8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filt/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6145 (Low Channel)	6 + 5	* 1.60903	49.77	ADR	28.6	-48.82	0	29.55	54	-24.45	-	-	360	199	H
			* 1.615462	61.96	PK-U	28.6	-48.73	0	41.83	-	-	74	-32.17	360	199	V
			* 1.619691	61.68	PK-U	28.6	-48.78	0	41.5	-	-	74	-32.5	360	199	H
			* 1.62603	49.76	ADR	28.7	-48.68	0	29.78	54	-24.22	-	-	360	199	V
			3.046284	59.12	PK-U	33	-47.85	0	44.27	-	-	88.2	-43.93	360	199	H
			3.04939	47.84	ADR	33.1	-47.88	0	33.06	68.2	-35.14	-	-	360	199	H
			3.060821	59.14	PK-U	33.1	-47.76	0	44.48	-	-	88.2	-43.72	360	101	V
			3.07394	47.7	ADR	33.1	-47.96	0	32.84	68.2	-35.36	-	-	360	101	V
			* 11.643587	46.09	ADR	38.4	-43.39	0	41.1	54	-12.9	-	-	360	101	H
			* 11.644214	46.09	ADR	38.4	-43.41	0	41.08	54	-12.92	-	-	360	101	V
			* 11.652994	57.74	PK-U	38.4	-43.5	0	52.64	-	-	74	-21.36	360	101	H
			* 11.658681	58.14	PK-U	38.4	-43.82	0	52.72	-	-	74	-21.28	360	101	V
	6545 (Mid Channel)	6 + 5	1.958246	50.51	ADR	31.8	-48.82	0	33.49	68.2	-34.71	-	-	0	200	H
			1.959594	62.86	PK-U	31.8	-48.79	0	45.87	-	-	88.2	-42.33	0	101	V
			1.959958	50.46	ADR	31.8	-48.79	0	33.47	68.2	-34.73	-	-	0	101	V
			1.970254	62.08	PK-U	31.8	-48.73	0	45.15	-	-	88.2	-43.05	0	200	H
			* 3.947802	58.09	PK-U	33.4	-46.98	0	44.51	-	-	74	-29.49	0	101	V
			* 3.948223	46.72	ADR	33.4	-46.95	0	33.17	54	-20.83	-	-	0	101	H
			* 3.951348	58.54	PK-U	33.4	-46.91	0	45.03	-	-	74	-28.97	0	101	H
			* 3.957299	46.81	ADR	33.4	-47.22	0	32.99	54	-21.01	-	-	0	101	V
			* 11.217204	46.55	ADR	38	-44.31	0	40.24	54	-13.76	-	-	0	199	V
			* 11.223827	46.66	ADR	38	-44.38	0	40.28	54	-13.72	-	-	0	199	H
			* 11.226855	58.13	PK-U	38	-44.29	0	51.84	-	-	74	-22.16	0	199	V
			* 11.230942	58.41	PK-U	38	-44.44	0	51.97	-	-	74	-22.03	0	199	H
	7025 (High Channel)	6 + 5	2.016788	61.71	PK-U	31.7	-48.87	0	44.54	-	-	88.2	-43.66	0	199	H
			2.017121	50.16	ADR	31.7	-48.88	0	32.98	68.2	-35.22	-	-	0	199	H
			2.017392	50.1	ADR	31.7	-48.89	0	32.91	68.2	-35.29	-	-	0	199	V
			2.021312	62.04	PK-U	31.7	-48.86	0	44.88	-	-	88.2	-43.32	0	199	V
			* 3.875359	58.01	PK-U	33.5	-46.6	0	44.91	-	-	74	-29.09	0	101	H
			* 3.886553	46.31	ADR	33.5	-46.68	0	33.13	54	-20.87	-	-	0	101	H
			* 3.889179	57.95	PK-U	33.5	-46.63	0	44.82	-	-	74	-29.18	0	101	V
			* 3.890343	46.31	ADR	33.5	-46.66	0	33.15	54	-20.85	-	-	0	101	V
			* 11.609372	58.15	PK-U	38.3	-43.59	0	52.86	-	-	74	-21.14	0	101	H
			* 11.632398	46.04	ADR	38.4	-43.45	0	40.99	54	-13.01	-	-	0	101	H
			* 11.632834	45.91	ADR	38.4	-43.47	0	40.84	54	-13.16	-	-	0	199	V
			* 11.633905	57.64	PK-U	38.4	-43.53	0	52.51	-	-	74	-21.49	0	199	V
11be (Partial RU Mode / Highest PSD)	6145 (106+26T) (Low Channel)	6 + 5	2.043304	56.57	PK-U	31.8	-46.5	0	41.87	-	-	88.2	-46.33	153	259	H
			2.041538	45.23	ADR	31.7	-46.4	0	30.53	68.2	-37.67	-	-	153	259	H
			3.080146	55.94	PK-U	33	-46.11	0	42.83	-	-	88.2	-45.37	26	257	H
			3.079844	44.46	ADR	33	-46.12	0	31.34	68.2	-36.86	-	-	26	257	H
			2.050816	57.27	PK-U	31.8	-46.5	0	42.57	-	-	88.2	-45.63	26	257	V
			2.048461	44.91	ADR	31.8	-46.4	0	30.31	68.2	-37.89	-	-	26	257	V
			3.078288	56.19	PK-U	33	-46.2	0	42.99	-	-	88.2	-45.21	301	102	V
			3.078611	44.46	ADR	33	-46.2	0	31.26	68.2	-36.94	-	-	301	102	V
			* 12.278565	52.81	PK-U	38.6	-40.84	0	50.57	-	-	74	-23.43	114	159	H
			* 12.27846	41	ADR	38.6	-40.85	0	38.75	54	-15.25	-	-	114	159	H
			* 12.289272	52.45	PK-U	38.6	-41	0	50.05	-	-	74	-23.95	191	113	V
			* 12.288565	40.92	ADR	38.6	-41	0	38.52	54	-15.48	-	-	191	113	V
	6545 (106+26T) (Mid Channel)	6 + 5	2.188069	57.11	PK-U	31.7	-46.6	0	42.21	-	-	88.2	-45.99	88	264	H
			2.186939	45.69	ADR	31.7	-46.59	0	30.8	68.2	-37.4	-	-	88	264	H
			3.278887	55.06	PK-U	32.8	-45.19	0	42.67	-	-	88.2	-45.53	180	171	H
			3.275878	43.28	ADR	32.8	-45.21	0	30.87	68.2	-37.33	-	-	180	171	H
			2.182652	57.18	PK-U	31.7	-46.53	0	42.35	-	-	88.2	-45.85	26	198	V
			2.182049	45.56	ADR	31.7	-46.6	0	30.66	68.2	-37.54	-	-	26	198	V
			3.271939	55.2	PK-U	32.8	-45.2	0	42.8	-	-	88.2	-45.4	358	167	V
			3.272587	43.76	ADR	32.8	-45.14	0	31.42	68.2	-36.78	-	-	358	167	V
			13.103196	53.14	PK-U	38.8	-41.9	0	50.04	-	-	88.2	-38.16	287	337	H
			13.104888	41.62	ADR	38.8	-41.9	0	38.52	68.2	-29.68	-	-	287	337	H
			13.106249	53.37	PK-U	38.8	-41.9	0	50.27	-	-	88.2	-37.93	167	243	V
			13.106358	41.73	ADR	38.8	-41.9	0	38.63	68.2	-29.57	-	-	167	243	V
	7025 (106+26T) (High Channel)	6 + 5	* 2.341323	58.29	PK-U	31.8	-47	0	43.09	-	-	74	-30.91	10	208	H
			* 2.338497	46.11	ADR	31.8	-47	0	30.91	54	-23.09	-	-	10	208	H
			* 3.513174	55.33	PK-U	33	-45.18	0	43.15	-	-	88.2	-45.05	161	291	H
			* 3.509372	43.96	ADR	32.9	-45.2	0	31.66	68.2	-36.54	-	-	161	291	H
			* 2.338773	57.38	PK-U	31.8	-47	0	42.18	-	-	74	-31.82	173	282	V
			* 2.338694	45.97	ADR	31.8	-47	0	30.77	54	-23.23	-	-	173	282	V
			* 3.51538	54.95	PK-U	33	-45.14	0	42.81	-	-	88.2	-45.39	178	280	V
			* 3.516524	43.19	ADR	33	-45.2	0	30.99	68.2	-37.21	-	-	178	280	V
			14.024427	54.72	PK-U	39.1	-42.6	0	51.22	-	-	88.2	-36.98	289	144	H
			14.022189	42.95	ADR	39.1	-42.6	0	39.45	68.2	-28.75	-	-	289	144	H
			14.028842	54.77	PK-U	39.1	-42.6	0	51.27	-	-	88.2	-36.93	188	180	V
			14.032681	42.93	ADR	39.1	-42.67	0	39.36	68.2	-28.84	-	-	188	180	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6145MHz)

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1.60903	49.77	ADR	28.6	0	-48.82	29.55	54	-24.45	-	-	360	199	H
1.615462	61.96	PK-U	28.6	0	-48.73	41.83	-	-	74	-32.17	360	199	V
1.619691	61.68	PK-U	28.6	0	-48.78	41.5	-	-	74	-32.5	360	199	H
1.62603	49.76	ADR	28.7	0	-48.68	29.78	54	-24.22	-	-	360	199	V
3.046284	59.12	PK-U	33	0	-47.85	44.27	-	-	88.2	-43.93	360	199	H
3.04939	47.84	ADR	33.1	0	-47.88	33.06	68.2	-35.14	-	-	360	199	H
3.060821	59.14	PK-U	33.1	0	-47.76	44.48	-	-	88.2	-43.72	360	101	V
3.07394	47.7	ADR	33.1	0	-47.96	32.84	68.2	-35.36	-	-	360	101	V
11.643587	46.09	ADR	38.4	0	-43.39	41.1	54	-12.9	-	-	360	101	H
11.644214	46.09	ADR	38.4	0	-43.41	41.08	54	-12.92	-	-	360	101	V
11.652994	57.74	PK-U	38.4	0	-43.5	52.64	-	-	74	-21.36	360	101	H
11.658681	58.14	PK-U	38.4	0	-43.82	52.72	-	-	74	-21.28	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

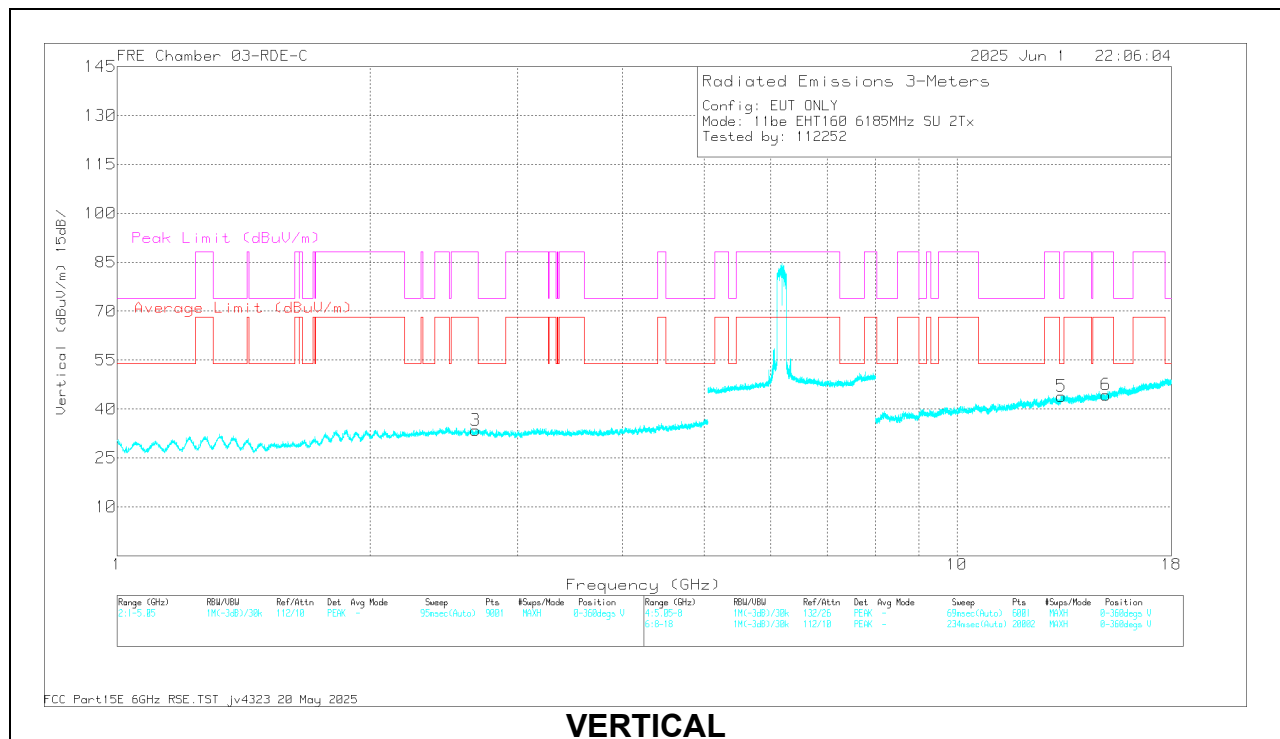
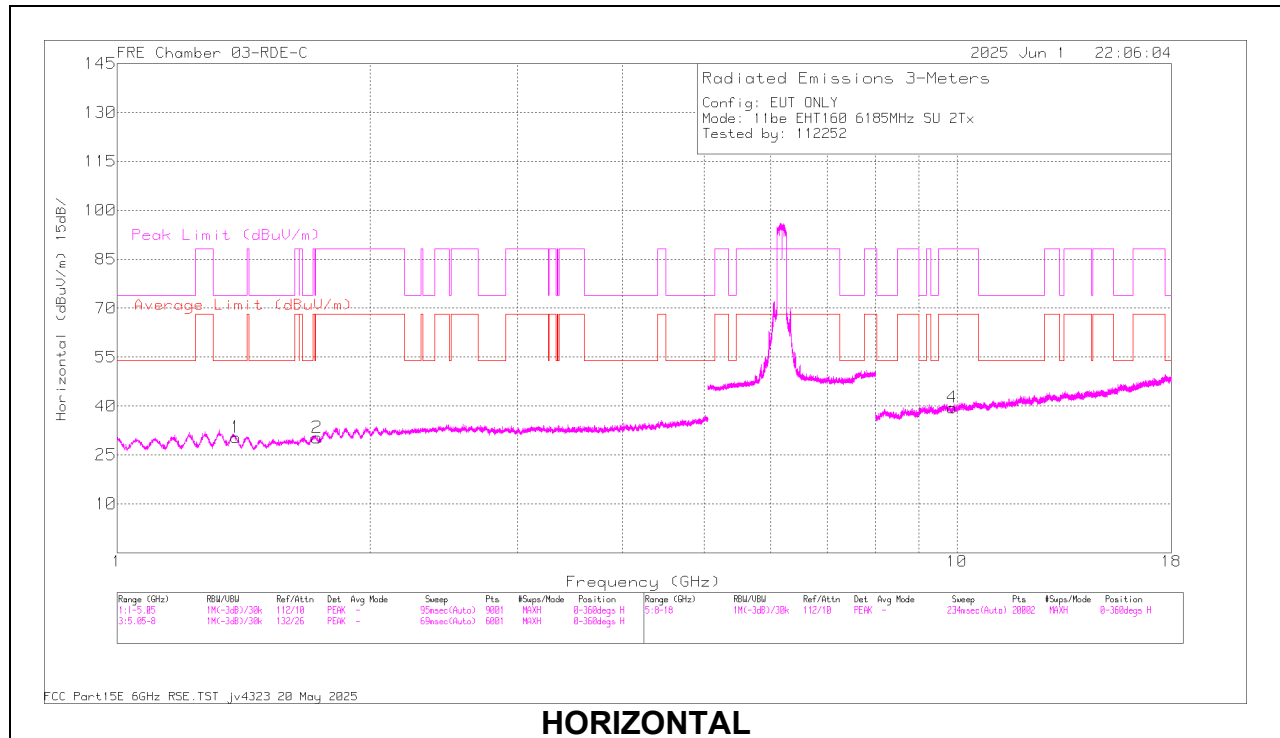
160MHz

UNII-5-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode)	6185 (Low Channel)	6 + 5	* 1.383299	59.67	PK-U	28.8	-47.23	0	41.24	-	-	74	-32.76	360	199	H
			* 1.383601	47.58	ADR	28.8	-47.26	0	29.12	54	-24.88	-	-	360	199	H
			* 2.673221	58.58	PK-U	32.4	-47.6	0	43.38	-	-	88.2	-44.82	360	199	V
			* 2.670358	46.73	ADR	32.4	-47.63	0	31.5	68.2	-36.7	-	-	360	199	V
			* 13.30711	57.14	PK-U	39.6	-44.19	0	52.55	-	-	74	-21.45	360	199	V
			* 13.3066	45.68	ADR	39.6	-44.16	0	41.12	54	-12.88	-	-	360	199	V
			1.728004	46.51	ADR	29.6	-47.4	0	28.71	68.2	-39.49	-	-	360	199	H
			1.730351	58.72	PK-U	29.7	-47.44	0	40.98	-	-	88.2	-47.22	360	199	H
			9.869723	45.45	ADR	37.2	-45.2	0	37.45	68.2	-30.75	-	-	360	199	H
			9.87202	57.29	PK-U	37.2	-45.1	0	49.39	-	-	88.2	-38.81	360	199	H
			15.055339	58.04	PK-U	39.5	-43.27	0	54.27	-	-	88.2	-33.93	360	101	V
			15.056574	46.07	ADR	39.5	-43.31	0	42.26	68.2	-25.94	-	-	360	101	V
	6505 (Mid Channel)	6 + 5	* 1.08137	62.52	PK-U	27.7	-49.74	0	40.48	-	-	74	-33.52	1	101	H
			* 1.08145	50.4	ADR	27.7	-49.74	0	28.36	54	-25.64	-	-	1	101	H
			* 3.951558	57.71	PK-U	33.7	-46.46	0	44.95	-	-	74	-29.05	1	101	H
			* 3.949772	45.54	ADR	33.7	-46.4	0	32.84	54	-21.16	-	-	1	101	H
			* 1.08072	62.42	PK-U	27.7	-49.67	0	40.45	-	-	74	-33.55	1	101	V
			* 1.082933	50.54	ADR	27.7	-49.71	0	28.53	54	-25.47	-	-	1	101	V
			* 3.983516	57.6	PK-U	33.7	-46.45	0	44.85	-	-	74	-29.15	1	101	V
			* 3.985752	45.45	ADR	33.7	-46.32	0	32.83	54	-21.17	-	-	1	101	V
			* 11.884294	54.03	PK-U	39.2	-41.3	0	51.93	-	-	74	-22.07	1	101	H
			* 11.878814	41.47	ADR	39.2	-41.4	0	39.27	54	-14.73	-	-	1	101	H
			* 11.878038	53.47	PK-U	39.2	-41.4	0	51.27	-	-	74	-22.73	1	101	V
			* 11.880606	41.38	ADR	39.2	-41.4	0	39.18	54	-14.82	-	-	1	101	V
	6985 (High Channel)	6 + 5	1.940731	62.57	PK-U	31.8	-48.67	0	45.7	-	-	88.2	-42.5	344	208	V
			1.941354	50.43	ADR	31.8	-48.7	0	33.53	68.2	-34.67	-	-	344	208	V
			1.942663	62.58	PK-U	31.8	-48.63	0	45.75	-	-	88.2	-42.45	164	229	H
			1.945391	50.41	ADR	31.8	-48.6	0	33.61	68.2	-34.59	-	-	164	229	H
			10.461023	43.84	ADR	38.1	-44.2	0	37.74	68.2	-30.46	-	-	309	371	V
			10.464535	56.13	PK-U	38.1	-44.1	0	50.13	-	-	88.2	-38.07	309	371	V
			10.470259	43.84	ADR	38.1	-44	0	37.94	68.2	-30.26	-	-	11	334	H
			10.470495	55.74	PK-U	38.1	-44	0	49.84	-	-	88.2	-38.36	11	334	H
			13.941209	41.46	ADR	39	-40.78	0	39.68	68.2	-28.52	-	-	172	321	V
			13.953524	53.44	PK-U	39	-40.6	0	51.84	-	-	88.2	-36.36	172	321	V
			13.95723	53.66	PK-U	39	-40.58	0	52.08	-	-	88.2	-36.12	347	257	H
			13.960298	41.78	ADR	39	-40.5	0	40.28	68.2	-27.92	-	-	347	257	H
11be (Partial RU Mode)	6185 (106+26T) (Low Channel)	6 + 5	2.069543	56.92	PK-U	31.8	-46.55	0	42.17	-	-	88.2	-46.03	127	232	H
			2.067764	45.47	ADR	31.8	-46.5	0	30.77	68.2	-37.43	-	-	127	232	H
			3.090284	56.25	PK-U	33	-46.14	0	43.11	-	-	88.2	-45.09	167	171	H
			3.088314	44.49	ADR	33	-46.2	0	31.29	68.2	-36.91	-	-	167	171	H
			2.070689	57.29	PK-U	31.8	-46.5	0	42.59	-	-	88.2	-45.61	35	251	V
			2.070081	45.72	ADR	31.8	-46.5	0	31.02	68.2	-37.18	-	-	35	251	V
			3.094104	56.42	PK-U	33	-46.11	0	43.31	-	-	88.2	-44.89	35	251	V
			3.093374	44.62	ADR	33	-46.1	0	31.52	68.2	-36.68	-	-	35	251	V
			* 12.359938	52.21	PK-U	38.6	-40.5	0	50.31	-	-	74	-23.69	35	262	H
			* 12.362829	40.65	ADR	38.6	-40.42	0	38.83	54	-15.17	-	-	35	262	H
			* 12.366463	52.03	PK-U	38.6	-40.3	0	50.33	-	-	74	-23.67	43	182	V
			* 12.366972	40.48	ADR	38.6	-40.3	0	38.78	54	-15.22	-	-	43	182	V
	6505 (106+26T) (Mid Channel)	6 + 5	* 1.084074	62.38	PK-U	27.7	-49.59	0	40.49	-	-	74	-33.51	0	101	H
			* 1.083639	50.94	ADR	27.7	-49.64	0	29	54	-25	-	-	0	101	H
			* 3.987559	56.87	PK-U	33.7	-46.3	0	44.27	-	-	74	-29.73	0	101	H
			* 3.987386	45.73	ADR	33.7	-46.3	0	33.13	54	-20.87	-	-	0	101	H
			* 1.087104	62.33	PK-U	27.7	-49.61	0	40.42	-	-	74	-33.58	0	101	V
			* 1.081344	50.88	ADR	27.7	-49.73	0	28.85	54	-25.15	-	-	0	101	V
			* 4.018339	57.64	PK-U	33.7	-46.13	0	45.21	-	-	74	-28.79	0	101	V
			* 3.994888	45.6	ADR	33.7	-46.51	0	32.79	54	-21.21	-	-	0	101	V
			* 11.478459	53.5	PK-U	38.8	-41.9	0	50.4	-	-	74	-23.6	0	101	H
			* 11.500217	41.71	ADR	38.8	-41.7	0	38.81	54	-15.19	-	-	0	101	H
			* 11.517975	53.12	PK-U	38.8	-41.9	0	50.02	-	-	74	-23.98	0	101	V
			* 11.481235	41.78	ADR	38.8	-41.8	0	38.78	54	-15.22	-	-	0	101	V
	6985 (106+26T) (High Channel)	6 + 5	3.480238	57.79	PK-U	32.9	-47.31	0	43.38	-	-	88.2	-44.82	261	265	H
			3.482492	45.4	ADR	32.9	-47.34	0	30.96	68.2	-37.24	-	-	261	265	H
			* 2.337596	61.1	PK-U	32.1	-49.99	0	43.21	-	-	74	-30.79	266	201	H
			* 2.325086	49	ADR	32.1	-49.93	0	31.17	54	-22.83	-	-	266	201	H
			3.47799	57.33	PK-U	32.9	-47.27	0	42.96	-	-	88.2	-45.24	302	330	V
			3.478466	45.41	ADR	32.9	-47.28	0	31.03	68.2	-37.17	-	-	302	330	V
			* 2.334738	60.99	PK-U	32.1	-49.96	0	43.13	-	-	74	-30.87	77	278	V
			* 2.330534	49.02	ADR	32.1	-49.95	0	31.17	54	-22.83	-	-	77	278	V
			13.982631	55.2	PK-U	39.1	-43.96	0	50.34	-	-	88.2	-37.86	46	281	H
			13.988575	43.82	ADR	39.1	-44.01	0	38.91	68.2	-29.29	-	-	46	281	H
			13.969075	55.73	PK-U	39.1	-43.89	0	50.94	-	-	88.2	-37.26	80	237	V
			13.988193	43.9	ADR	39.1	-43.98	0	39.02	68.2	-29.18	-	-	80	237	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS – MIMO SU CDD MODE (HIGH CHANNEL / 6185MHz)

RADIATED EMISSIONS

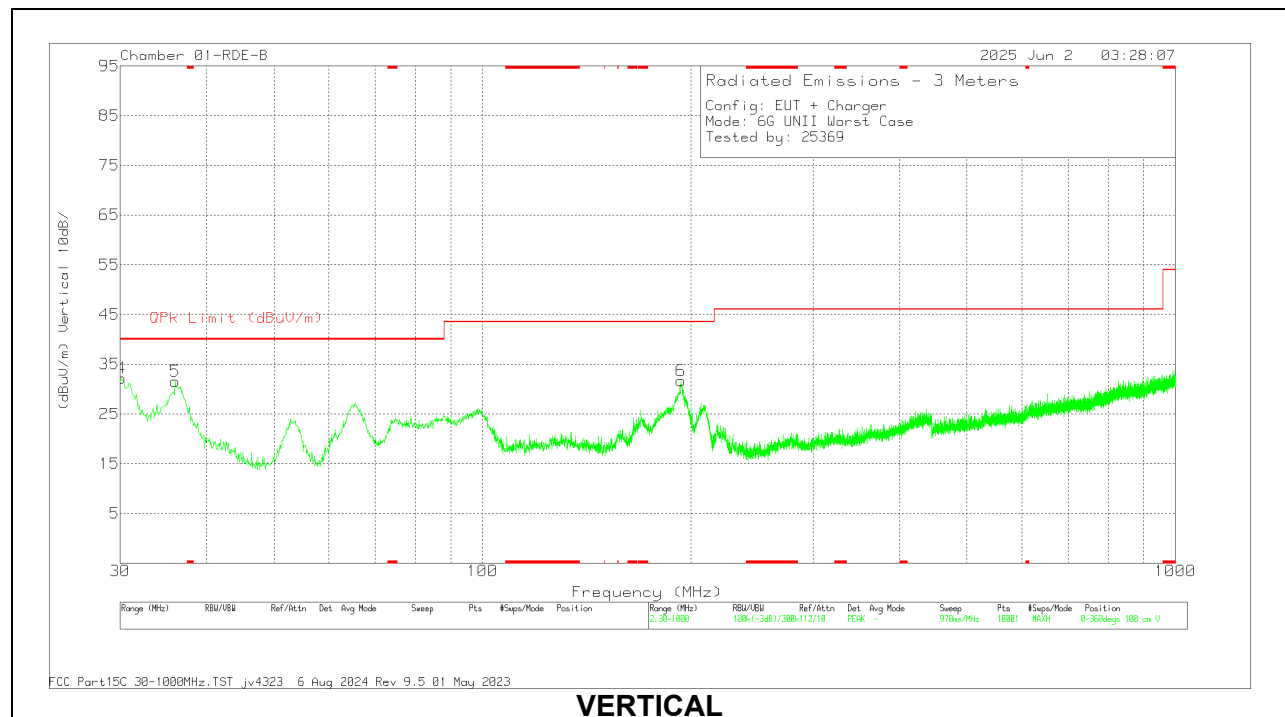
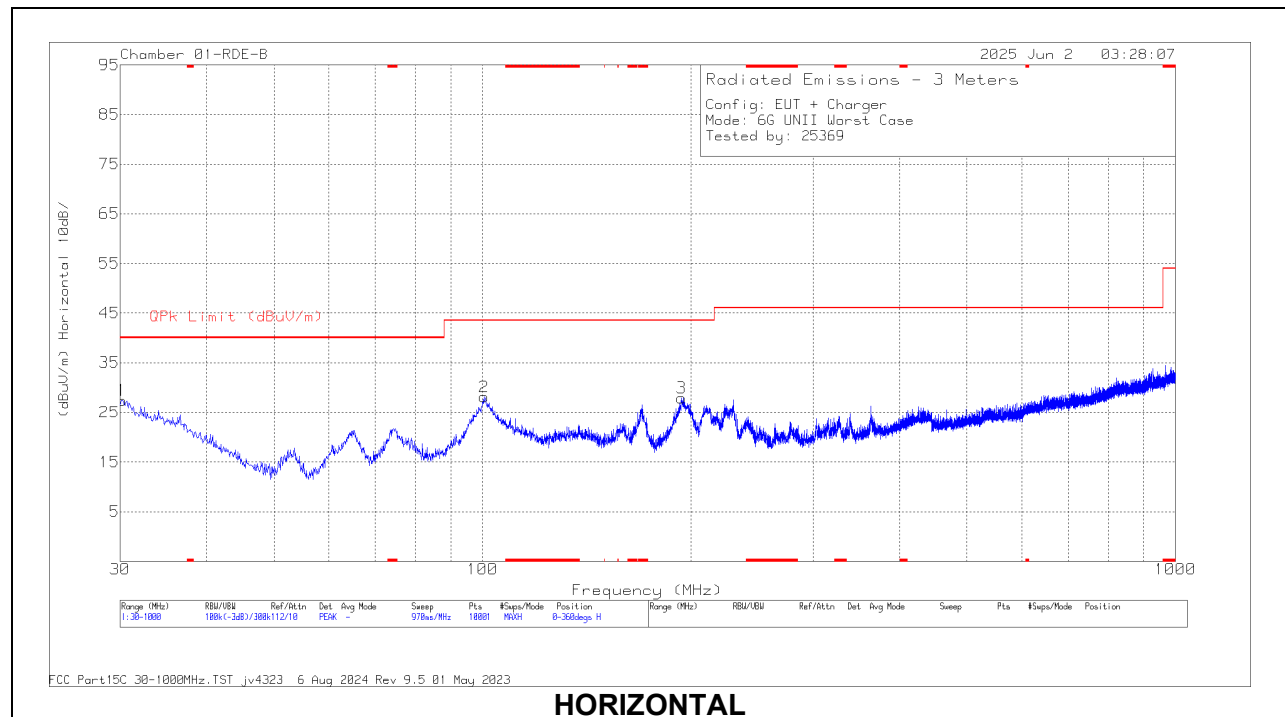
Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.383299	59.67	PK-U	28.8	0	-47.23	41.24	-	-	74	-32.76	360	199	H
* 1.383601	47.58	ADR	28.8	0	-47.26	29.12	54	-24.88	-	-	360	199	H
* 2.673221	58.58	PK-U	32.4	0	-47.6	43.38	-	-	88.2	-44.82	360	199	V
* 2.670358	46.73	ADR	32.4	0	-47.63	31.5	68.2	-36.7	-	-	360	199	V
* 13.30711	57.14	PK-U	39.6	0	-44.19	52.55	-	-	74	-21.45	360	199	V
* 13.3066	45.68	ADR	39.6	0	-44.16	41.12	54	-12.88	-	-	360	199	V
1.728004	46.51	ADR	29.6	0	-47.4	28.71	68.2	-39.49	-	-	360	199	H
1.730351	58.72	PK-U	29.7	0	-47.44	40.98	-	-	88.2	-47.22	360	199	H
9.869723	45.45	ADR	37.2	0	-45.2	37.45	68.2	-30.75	-	-	360	199	H
9.87202	57.29	PK-U	37.2	0	-45.1	49.39	-	-	88.2	-38.81	360	199	H
15.055339	58.04	PK-U	39.5	0	-43.27	54.27	-	-	88.2	-33.93	360	101	V
15.056574	46.07	ADR	39.5	0	-43.31	42.26	68.2	-25.94	-	-	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.3. WORST CASE BELOW 1 GHz



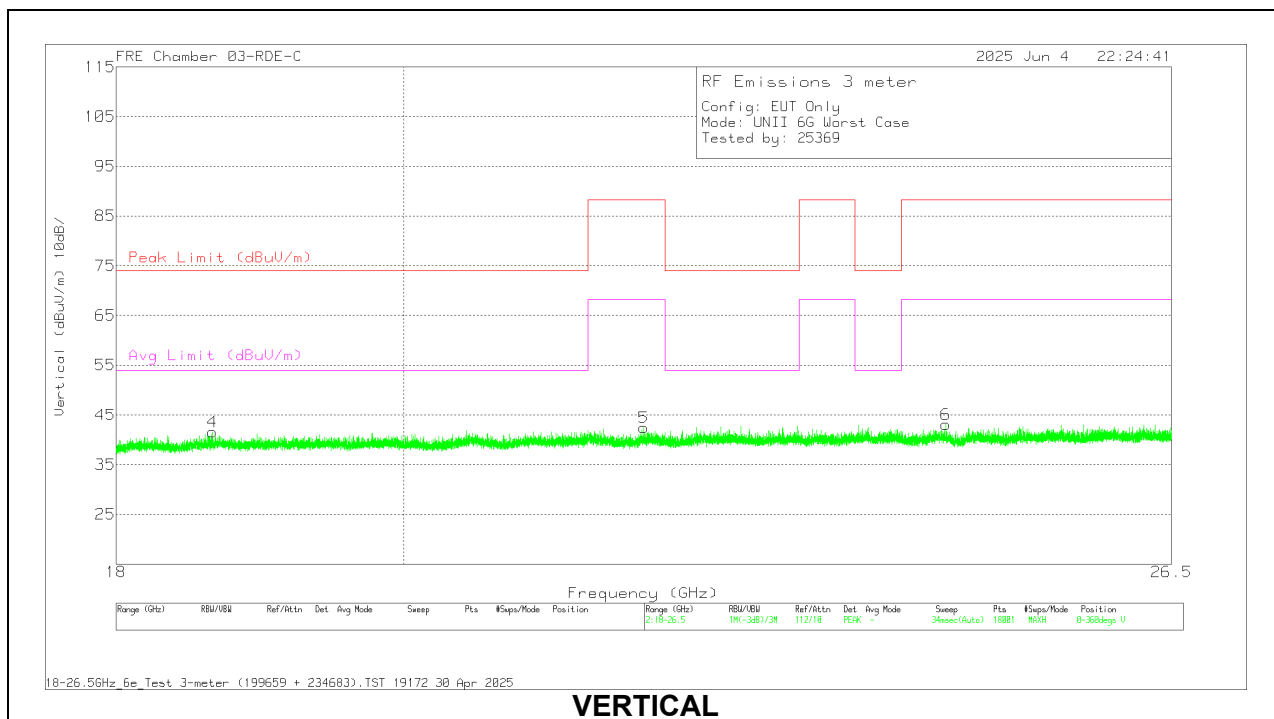
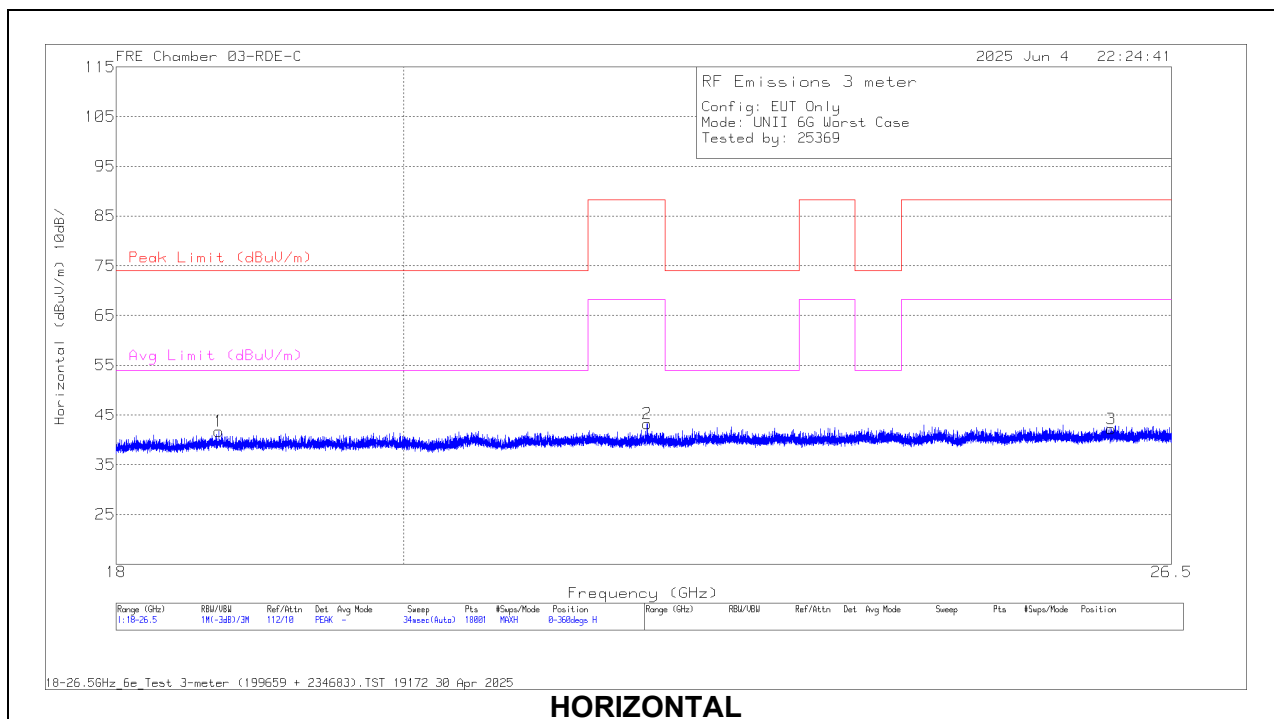
RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	85150 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	30.0767	31.53	Qp	27.2	-31.5	0	27.23	40	-12.77	113	178	V
1	30.194	31.82	Pk	27.1	-31.5	0	27.42	40	-12.58	0-360	299	H
5	36.014	39.52	Pk	23.4	-31.4	0	31.52	40	-8.48	0-360	100	V
2	100.519	42.49	Pk	16.4	-30.8	0	28.09	43.52	-15.43	0-360	299	H
6	193.542	44.31	Pk	17.6	-30.2	0	31.71	43.52	-11.81	0-360	100	V
3	193.833	40.45	Pk	17.6	-30.2	0	27.85	43.52	-15.67	0-360	199	H

Qp - Quasi-Peak detector

Pk - Peak detector

1.4. WORST CASE 18-26 GHz



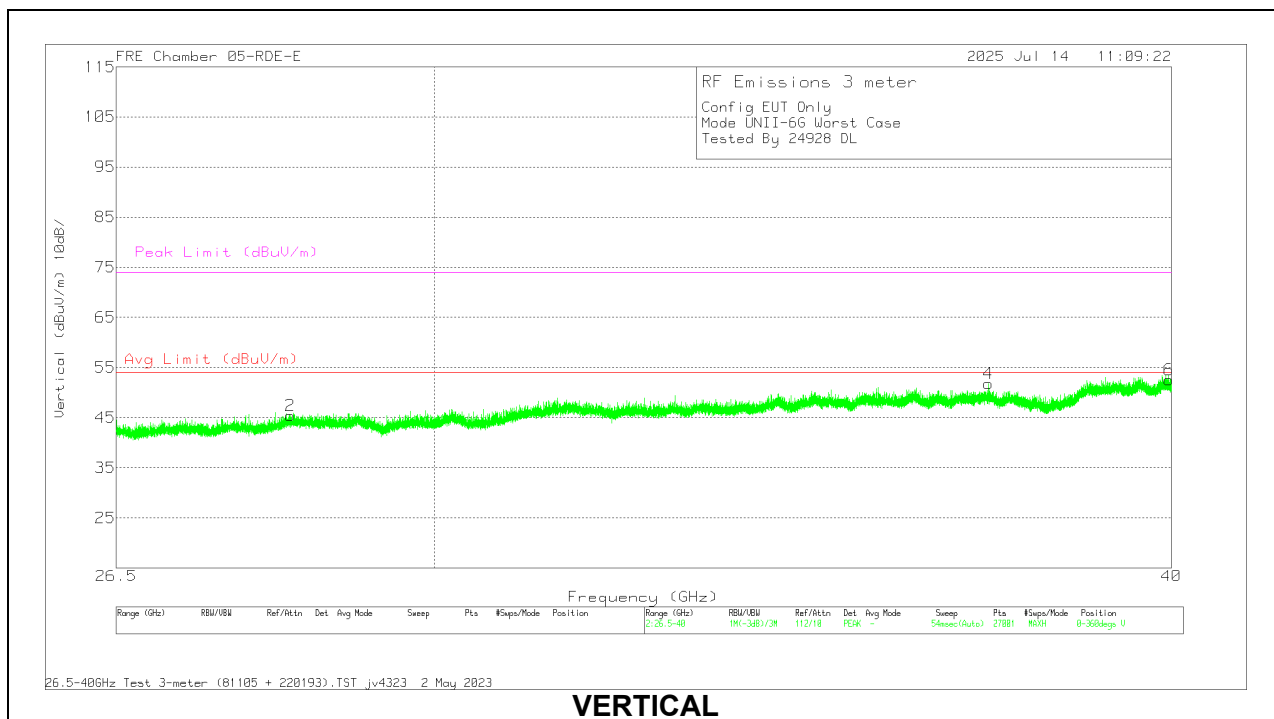
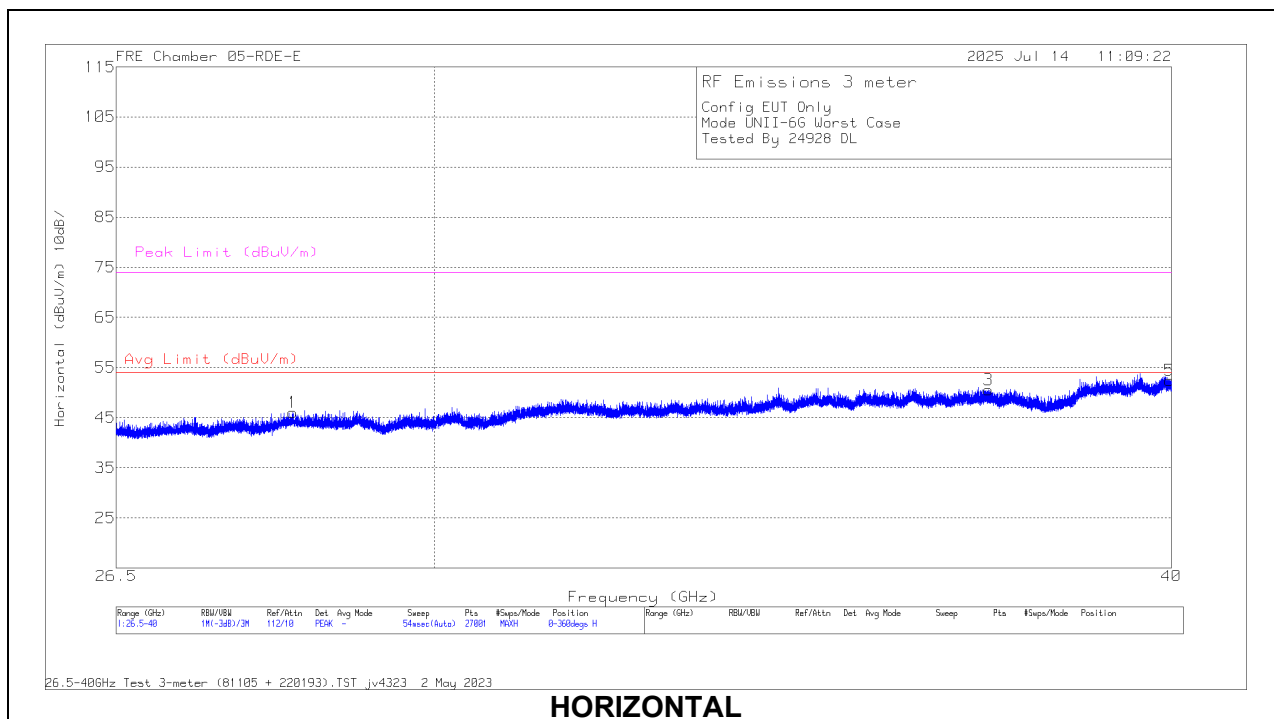
RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	199659 ACF (dB/m)	234683 18-26.5GHz_Amp Assembly (dB)	Cable (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 18.689683	57.17	PK-U	32.2	-62.4	14	40.97	74	-33.03	1	101	H
4	* 18.648914	58.33	PK-U	32.3	-62.5	14	42.13	74	-31.87	81	199	V
5	21.841085	56.32	PK-U	32.9	-62	15.1	42.32	88.2	-45.88	81	199	V
2	21.866207	56.26	PK-U	33	-62.1	15.1	42.26	88.2	-45.94	81	133	H
6	24.399414	55.74	PK-U	33.6	-62.4	16.1	43.04	88.2	-45.16	81	101	V
3	25.923089	55.65	PK-U	34.1	-61.7	16.6	44.65	88.2	-43.55	81	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

1.5. WORST CASE 26-40 GHz



RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81105 ACF (dB/m)	CBL/AMP (db)	CBL (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	28.3885	44.48	Pk	36.1	-64.4	29.9	46.08	-	-	74	-27.92	0-360	101	H
3	37.242	43.22	Pk	37.7	-64.6	34.2	50.52	-	-	74	-23.48	0-360	101	H
5	* 39.9705	42.53	Pk	38.7	-64.5	35.7	52.43	-	-	74	-21.57	0-360	200	H
2	28.3655	44	Pk	36.1	-64.5	29.8	45.4	-	-	74	-28.6	0-360	101	V
4	37.2455	44.48	Pk	37.7	-64.6	34.2	51.78	-	-	74	-22.22	0-360	200	V
6	* 39.9605	42.64	Pk	38.7	-64.5	35.7	52.54	-	-	74	-21.46	0-360	101	V

PK-U - U-NII: Maximum Peak

2. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

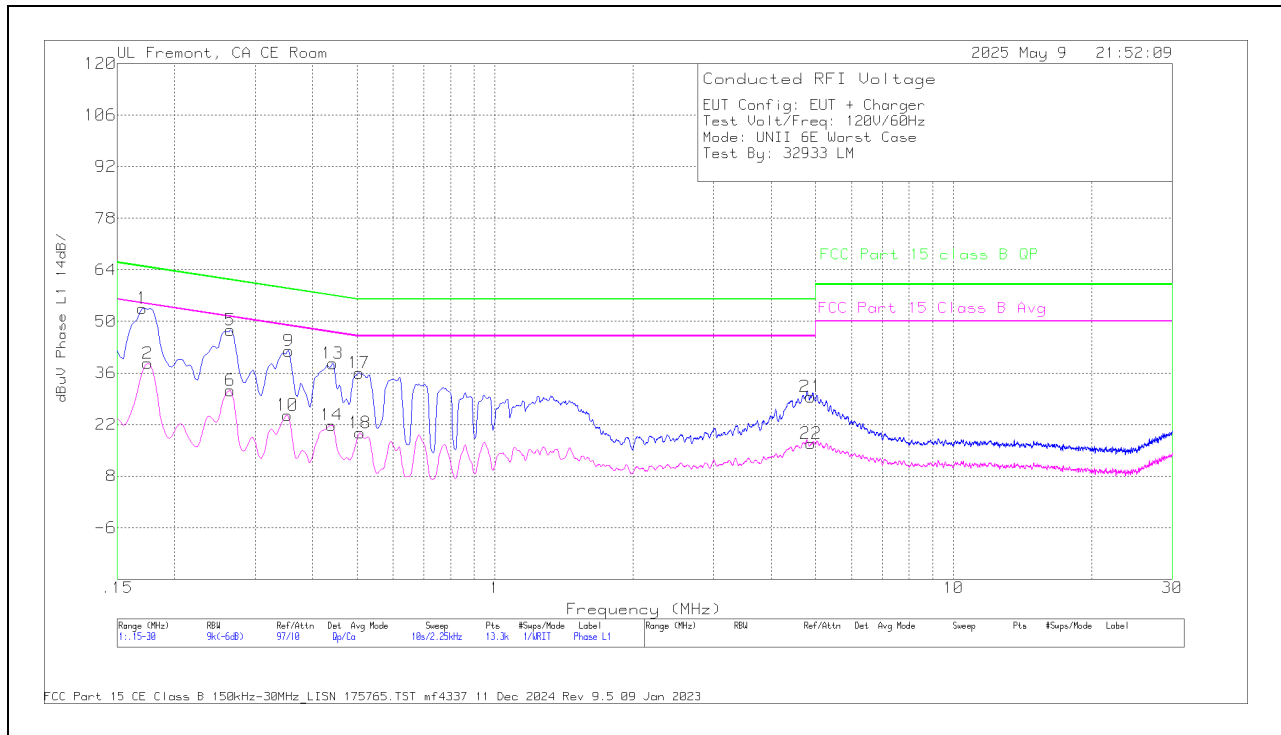
The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

2.1. EUT WITH AC ADAPTER

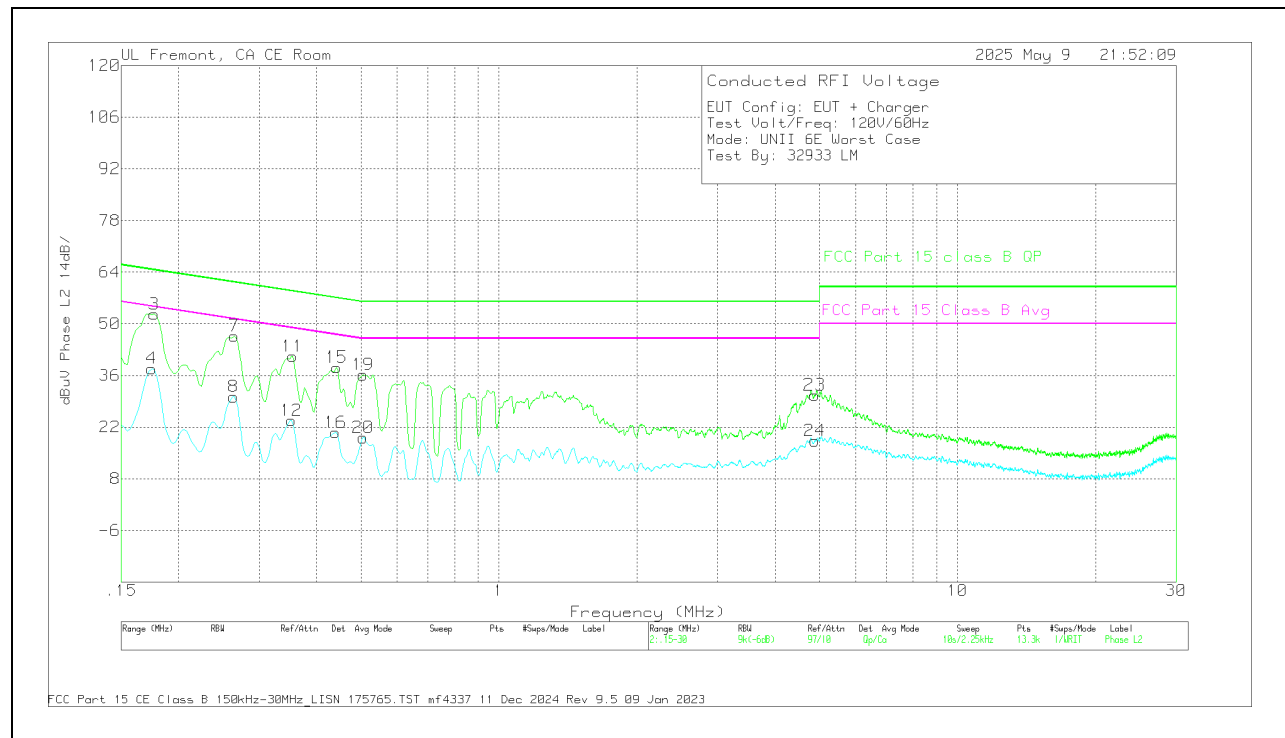
LINE 1 RESULTS



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading (dBuV)	FCC Part 15C Avg Limit (dBuV)	Margin (dB)	FCC Part 15C QP Limit (dBuV)	Margin (dB)
2	.1748	19.7	Ca	.3	.1	8.5	10	38.6	54.73	-16.13	-	-
6	.2648	13.24	Ca	-.1	0	8.1	10	31.24	51.28	-20.04	-	-
10	.3525	6.53	Ca	-.4	0	8.4	10	24.53	48.9	-24.37	-	-
14	.4403	2.94	Ca	.1	0	8.8	10	21.84	47.06	-25.22	-	-
18	.5078	2.02	Ca	-.2	0	7.9	10	19.72	46	-26.28	-	-
22	4.8885	-1.28	Ca	.1	0	8	10	16.82	46	-29.18	-	-
1	.1703	34.63	Qp	.3	.1	8.5	10	53.53	-	-	64.95	-11.42
5	.2648	29.62	Qp	-.1	0	8.1	10	47.62	-	-	61.28	-13.66
9	.3548	23.98	Qp	-.4	0	8.4	10	41.98	-	-	58.85	-16.87
13	.4425	19.68	Qp	.1	0	8.8	10	38.58	-	-	57.01	-18.43
17	.5055	18.22	Qp	-.1	0	7.9	10	36.02	-	-	56	-19.98
21	4.8795	11.55	Qp	0	0	8	10	29.55	-	-	56	-26.45

Qp - Quasi-Peak detector
Ca - CISPR average detection

LINE 2 RESULTS

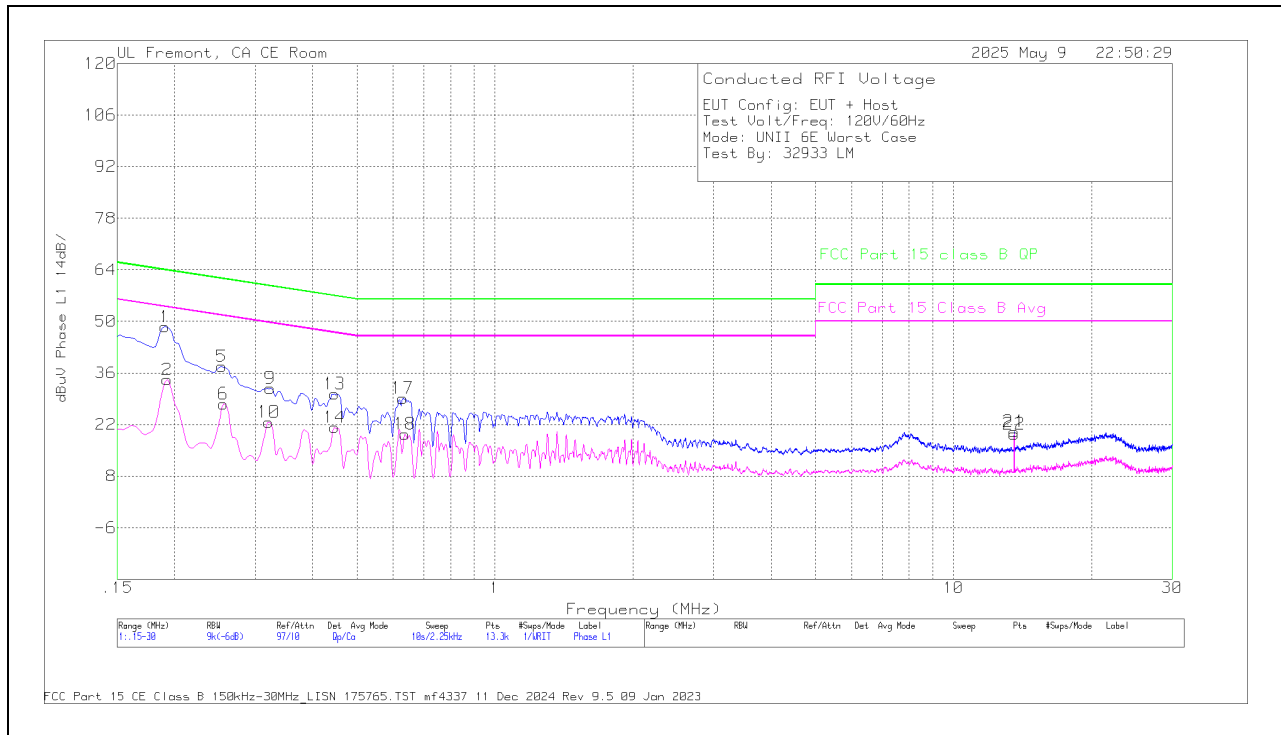


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading (dBuV)	FCC Part 15C Avg Limit (dBuV)	Margin (dB)	FCC Part 15C QP Limit (dBuV)	Margin (dB)
4	.1748	19.06	Ca	.3	0	8.5	10	37.86	54.73	-16.87	-	-
8	.2636	12.21	Ca	-.1	0	8.1	10	30.21	51.32	-21.11	-	-
12	.3525	5.79	Ca	-.4	0	8.4	10	23.79	48.9	-25.11	-	-
16	.4403	1.64	Ca	.1	0	8.8	10	20.54	47.06	-26.52	-	-
20	.5055	1.35	Ca	-.1	0	7.9	10	19.15	46	-26.85	-	-
24	.4885	.2	Ca	.1	0	8	10	18.3	46	-27.7	-	-
3	.177	33.92	Qp	.3	0	8.4	10	52.62	-	-	64.63	-12.01
7	.2648	28.72	Qp	-.1	0	8.1	10	46.72	-	-	61.28	-14.56
11	.3548	23.2	Qp	-.4	0	8.4	10	41.2	-	-	58.85	-17.65
15	.4425	19.24	Qp	.1	0	8.8	10	38.14	-	-	57.01	-18.87
19	.5055	18.39	Qp	-.1	0	7.9	10	36.19	-	-	56	-19.81
23	.48795	12.67	Qp	0	0	8	10	30.67	-	-	56	-25.33

Qp - Quasi-Peak detector
Ca - CISPR average detection

2.2. EUT WITH LAPTOP

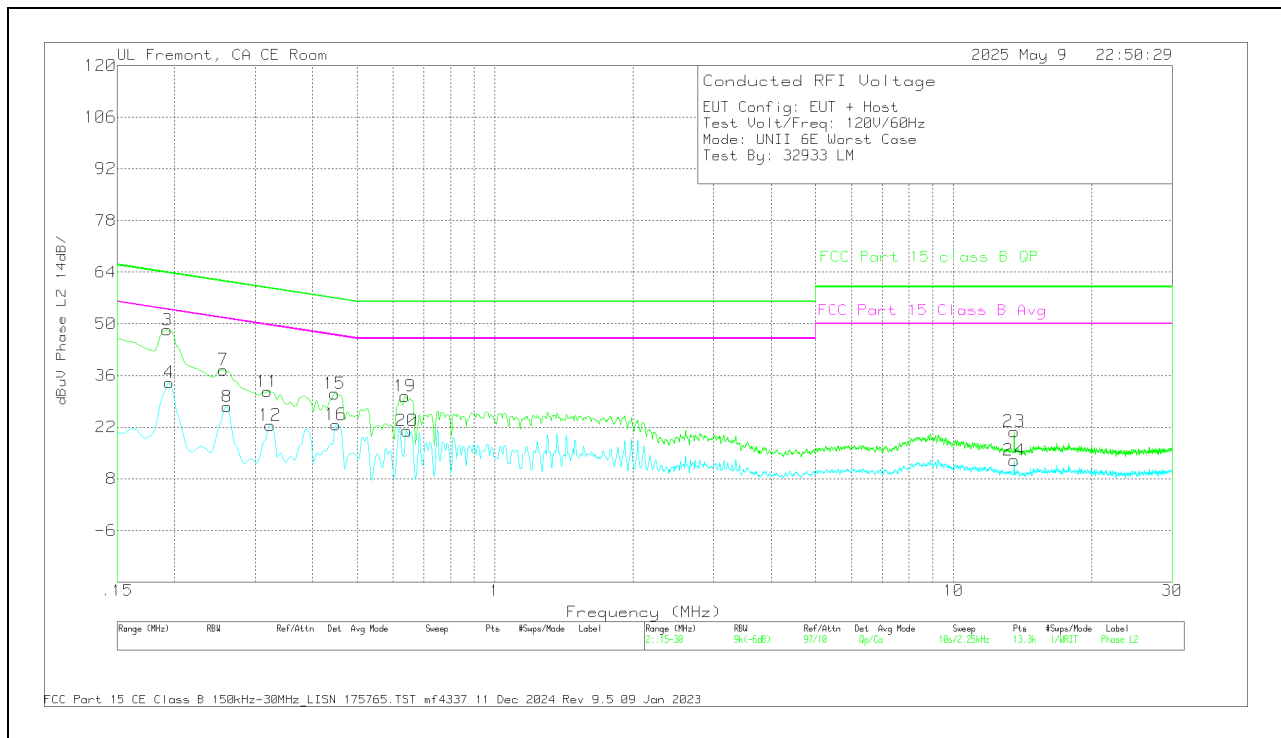
LINE 1 RESULTS



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading (dBuV)	FCC Part 15C Avg Limit (dBuV)	Margin (dB)	FCC Part 15C QP Limit (dBuV)	Margin (dB)
2	.1928	15.51	Ca	.2	.1	8.4	10	34.21	53.92	-19.71	-	-
6	.2558	9.48	Ca	-.1	0	8.2	10	27.58	51.57	-23.99	-	-
10	.321	4.67	Ca	-.2	0	8.2	10	22.67	49.68	-27.01	-	-
14	.447	2.14	Ca	.2	0	8.9	10	21.24	46.93	-25.69	-	-
18	.636	1.1	Ca	0	0	8.3	10	19.4	46	-26.6	-	-
22	13.56	.93	Ca	.2	.1	8.2	10	19.43	50	-30.57	-	-
1	.1905	29.82	Qp	.2	.1	8.4	10	48.52	-	-	64.01	-15.49
5	.2535	19.66	Qp	-.1	0	8.2	10	37.76	-	-	61.64	-23.88
9	.3233	13.84	Qp	-.2	0	8.2	10	31.84	-	-	59.62	-27.78
13	.447	11.2	Qp	.2	0	8.9	10	30.3	-	-	56.93	-26.63
17	.6293	10.83	Qp	0	0	8.3	10	29.13	-	-	56	-26.87
21	13.56	1.57	Qp	.2	.1	8.2	10	20.07	-	-	60	-39.93

Qp - Quasi-Peak detector
 Ca - CISPR average detection

LINE 2 RESULTS



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading (dBuV)	FCC Part 15C Avg Limit (dBuV)	Margin (dB)	FCC Part 15C QP Limit (dBuV)	Margin (dB)
4	.195	15.56	Ca	.1	0	8.4	10	34.06	53.82	-19.76	-	-
8	.2603	9.43	Ca	-.1	0	8.2	10	27.53	51.42	-23.89	-	-
12	.3233	4.49	Ca	-.2	0	8.2	10	22.49	49.62	-27.13	-	-
16	.4493	3.55	Ca	.2	0	8.9	10	22.65	46.89	-24.24	-	-
20	.6428	2.52	Ca	.1	0	8.4	10	21.02	46	-24.98	-	-
24	13.56	-5.52	Ca	.2	.1	8.2	10	12.98	50	-37.02	-	-
3	.1928	29.76	Qp	.2	0	8.4	10	48.36	-	-	63.92	-15.56
7	.2558	19.39	Qp	-.1	0	8.2	10	37.49	-	-	61.57	-24.08
11	.3188	13.62	Qp	-.2	0	8.2	10	31.62	-	-	59.74	-28.12
15	.447	11.98	Qp	.2	0	8.9	10	31.08	-	-	56.93	-25.85
19	.636	12.1	Qp	0	0	8.3	10	30.4	-	-	56	-25.6
23	13.56	2.29	Qp	.2	.1	8.2	10	20.79	-	-	60	-39.21

Qp - Quasi-Peak detector
Ca - CISPR average detection

3. SETUP PHOTOS

Refer to 15496249-EP1 report for Setup_Photos.

END OF TEST REPORT