

W-CDMA Band II

Frequency: 1852.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.456$ mho/m; $\epsilon_r = 52.567$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Rear/Rel. 99 RMC 12.2kbps_Ch 9262/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.878 mW/g

Rear/Rel. 99 RMC 12.2kbps_Ch 9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 30.271 V/m; Power Drift = -0.0024 dB

Peak SAR (extrapolated) = 1.7270

SAR(1 g) = 0.943 mW/g; SAR(10 g) = 0.459 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.387 mW/g

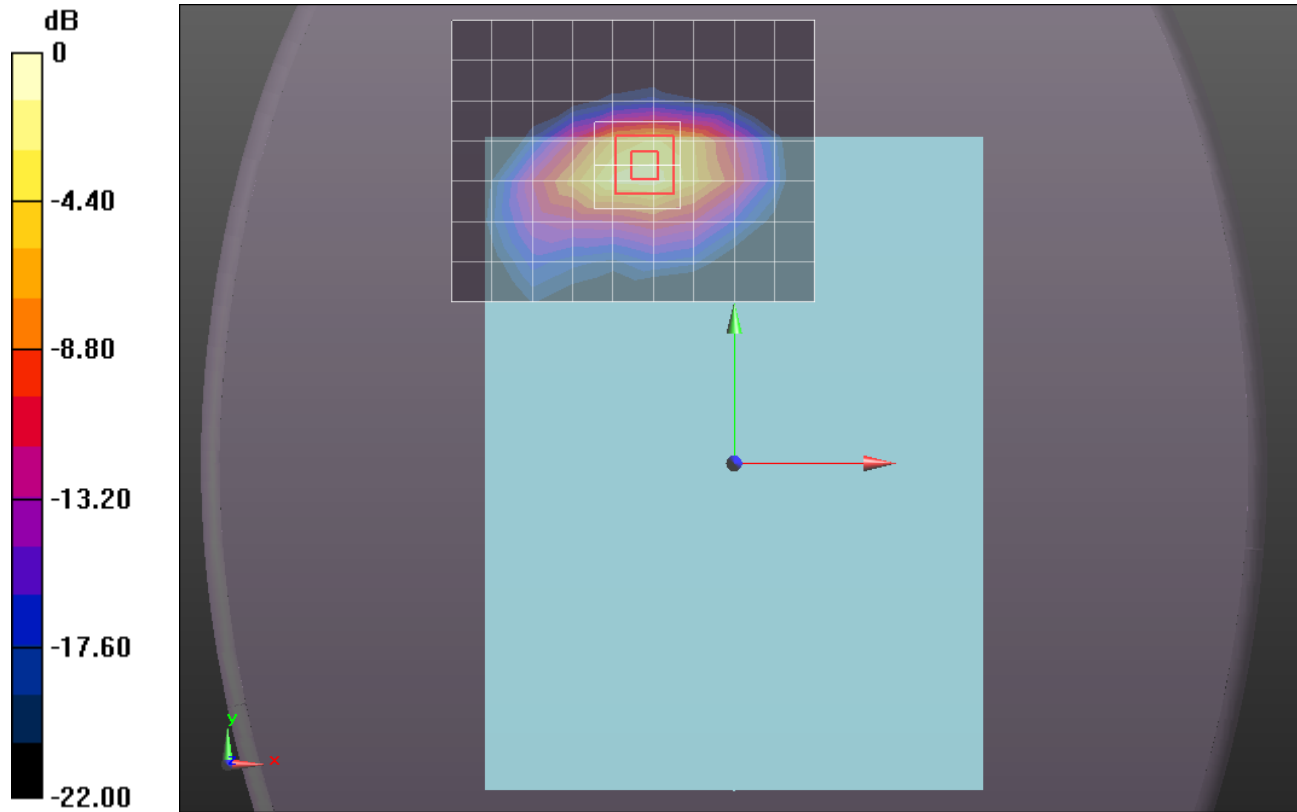

0 dB = 1.390mW/g = 2.86 dB mW/g

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.489$ mho/m; $\epsilon_r = 52.535$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Rear/Rel. 99 RMC 12.2kbps_Ch 9400/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.901 mW/g



Rear/Rel. 99 RMC 12.2kbps_Ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.752 V/m; Power Drift = -0.0035 dB

Peak SAR (extrapolated) = 1.7430

SAR(1 g) = 0.939 mW/g; SAR(10 g) = 0.457 mW/g

Maximum value of SAR (measured) = 1.370 mW/g

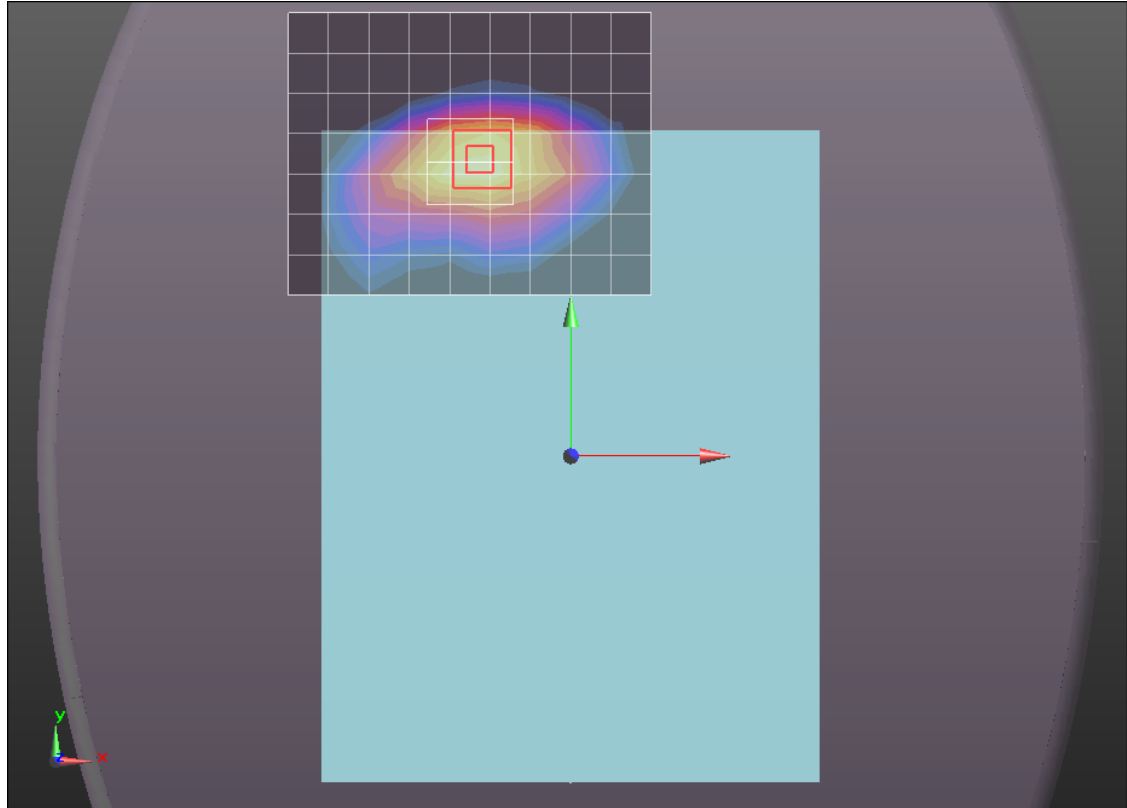

0 dB = 1.370mW/g = 2.73 dB mW/g

W-CDMA Band II

Frequency: 1907.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.524$ mho/m; $\epsilon_r = 52.452$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Rear/Rel. 99 RMC 12.2kbps_Ch 9538/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.054 mW/g

Rear/Rel. 99 RMC 12.2kbps_Ch 9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 30.992 V/m; Power Drift = -0.0024 dB

Peak SAR (extrapolated) = 1.9470

SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.514 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.526 mW/g

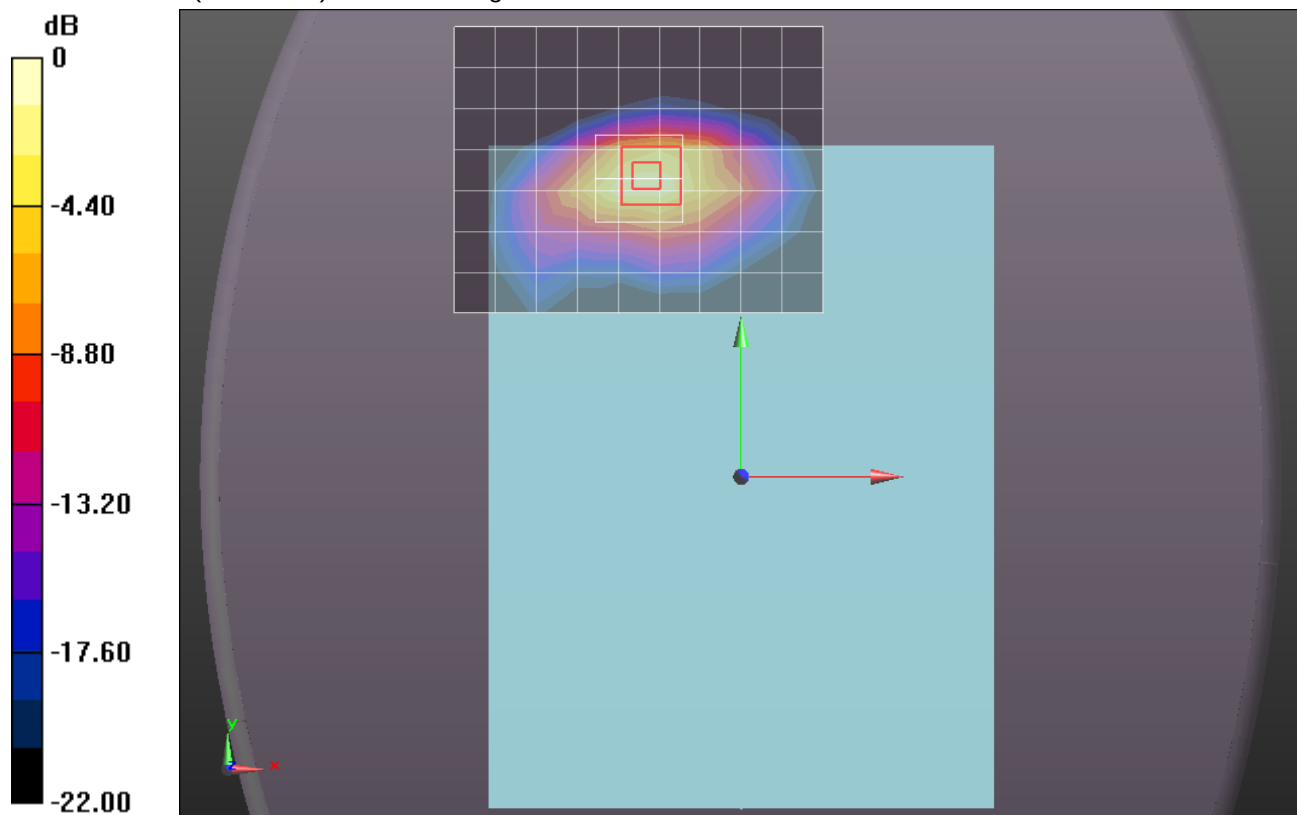

0 dB = 1.530mW/g = 3.69 dB mW/g


W-CDMA Band II

Frequency: 1907.6 MHz; Duty Cycle: 1:1

Rear/Rel. 99 RMC 12.2kbps_Ch 9538/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.433 mW/g

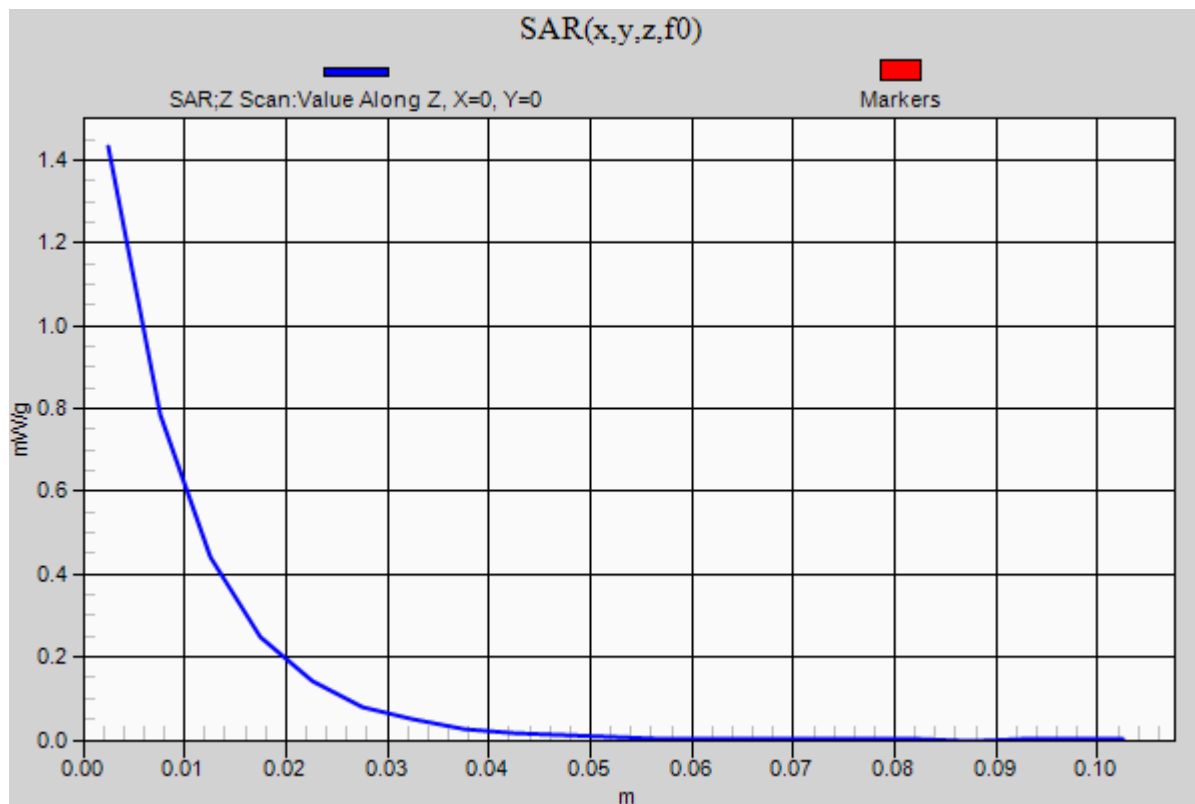

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.512$ mho/m; $\epsilon_r = 52.317$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Edge 1/Rel. 99 RMC 12.2kbps_Ch 9400/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.742 mW/g


Edge 1/Rel. 99 RMC 12.2kbps_Ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.636 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.9350

SAR(1 g) = 0.502 mW/g; SAR(10 g) = 0.246 mW/g

Maximum value of SAR (measured) = 0.747 mW/g

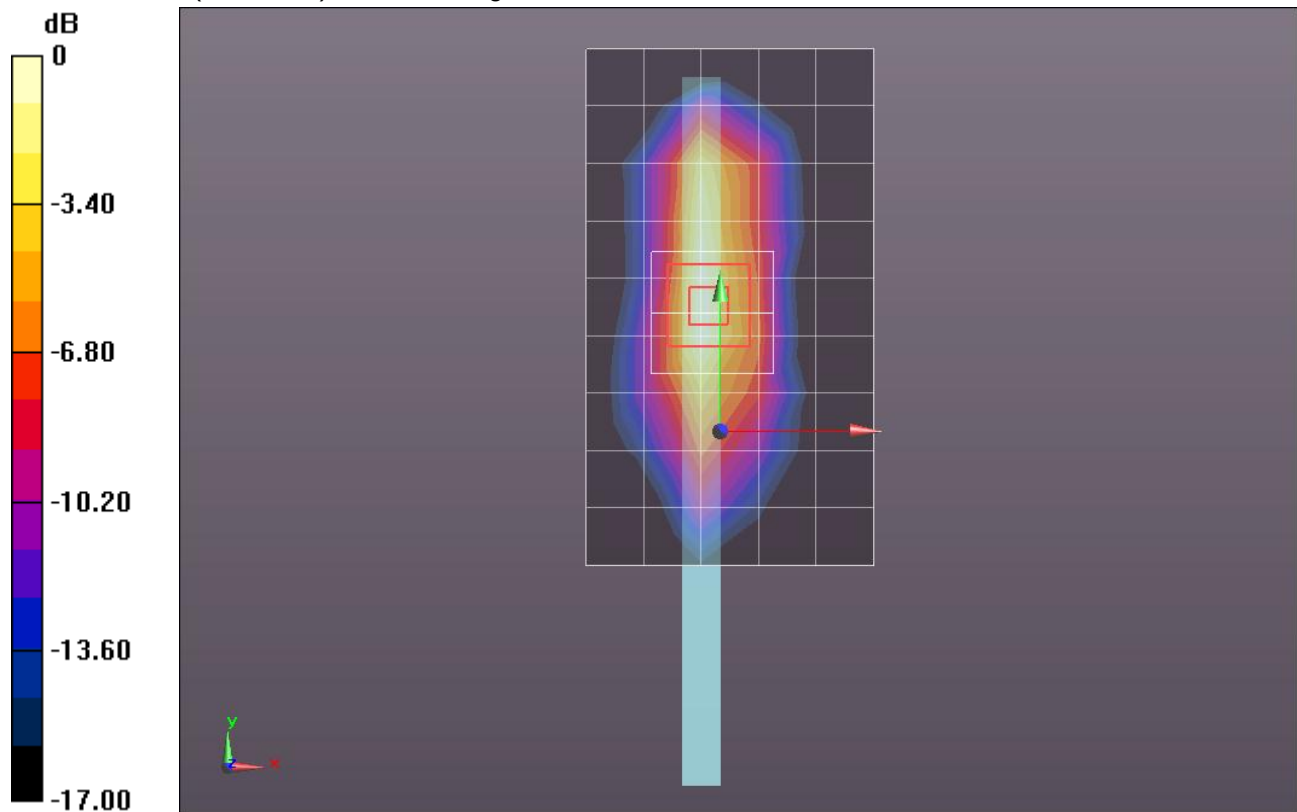

0 dB = 0.750mW/g = -2.50 dB mW/g

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.512$ mho/m; $\epsilon_r = 52.317$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

41 deg Tilt @ Edge 1/Rel. 99 RMC 12.2kbps_Ch 9400/Area Scan (6x10x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.985 mW/g

41 deg Tilt @ Edge 1/Rel. 99 RMC 12.2kbps_Ch 9400/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.369 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.2800

SAR(1 g) = 0.680 mW/g; SAR(10 g) = 0.325 mW/g

Maximum value of SAR (measured) = 1.016 mW/g

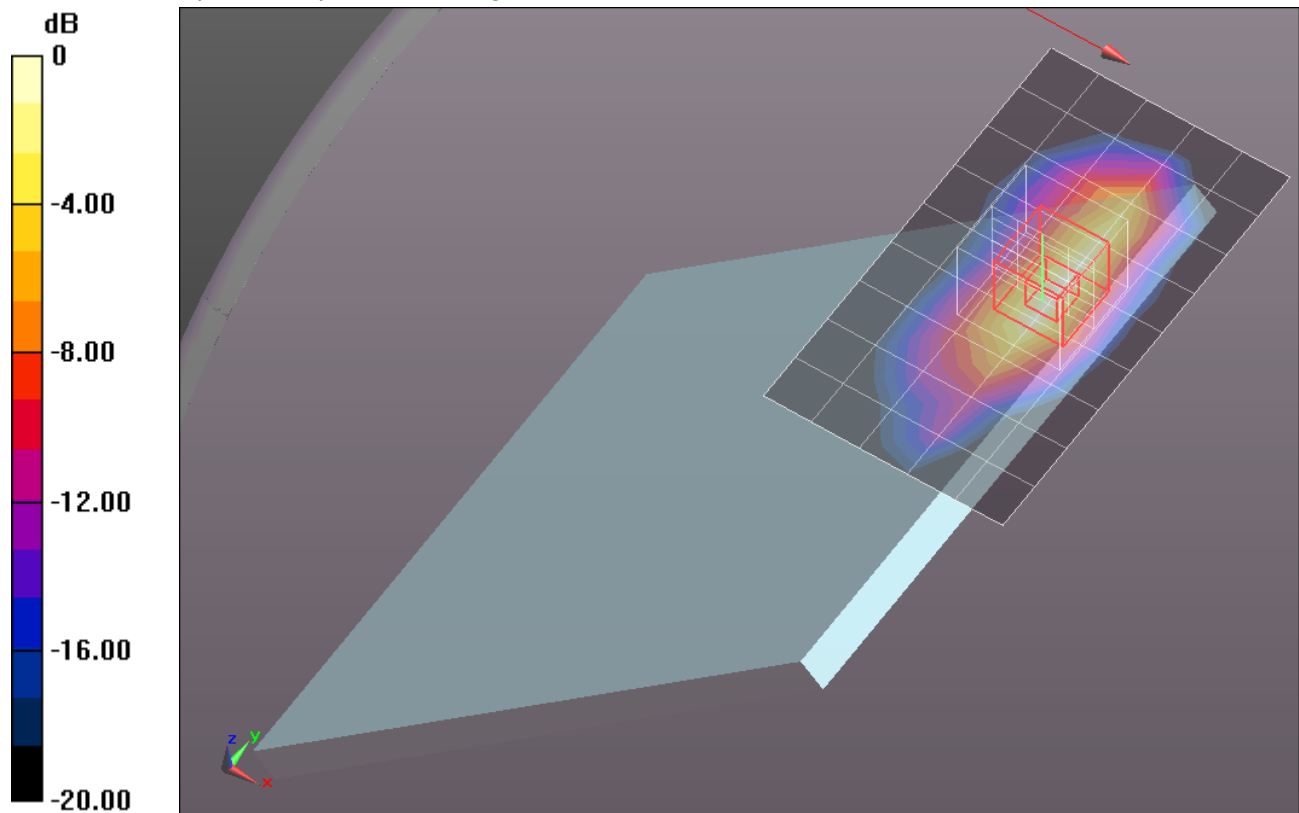

0 dB = 1.020mW/g = 0.17 dB mW/g

W-CDMA Band II

Frequency: 1852.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.059$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012

- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012

- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)

- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Rear with 12mm/Rel. 99 RMC 12.2 kbps_Ch 9262/Area Scan (10x8x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.780 mW/g

Rear with 12mm/Rel. 99 RMC 12.2 kbps_Ch 9262/Zoom Scan (5x5x7)/Cube 0: Measurement

grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 24.567 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.1030

SAR(1 g) = 0.694 mW/g; SAR(10 g) = 0.407 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.919 mW/g

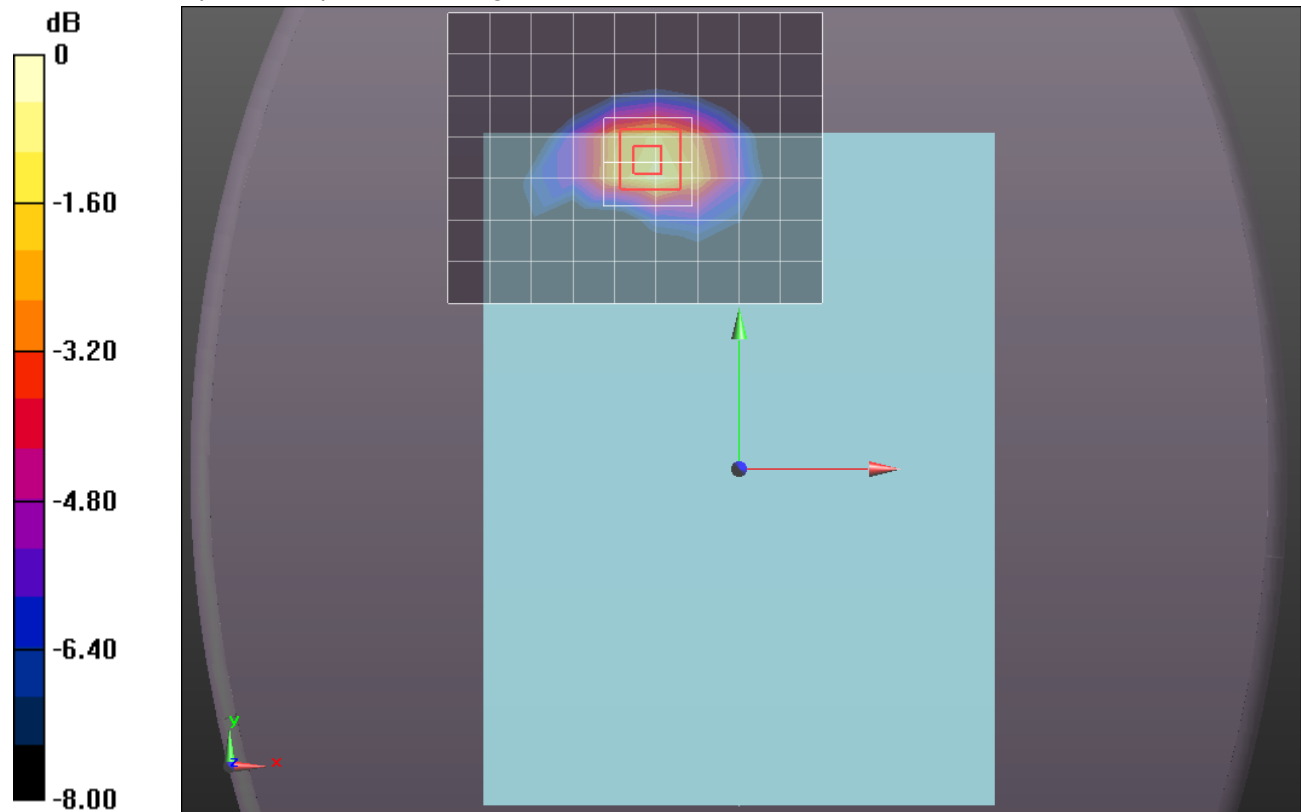

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.525$ mho/m; $\epsilon_r = 51.994$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Rear with 12mm/Rel. 99 RMC 12.2 kbps_Ch 9400/Area Scan (10x8x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.002 mW/g

Rear with 12mm/Rel. 99 RMC 12.2 kbps_Ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.271 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.3920

SAR(1 g) = 0.872 mW/g; SAR(10 g) = 0.511 mW/g

Maximum value of SAR (measured) = 1.156 mW/g

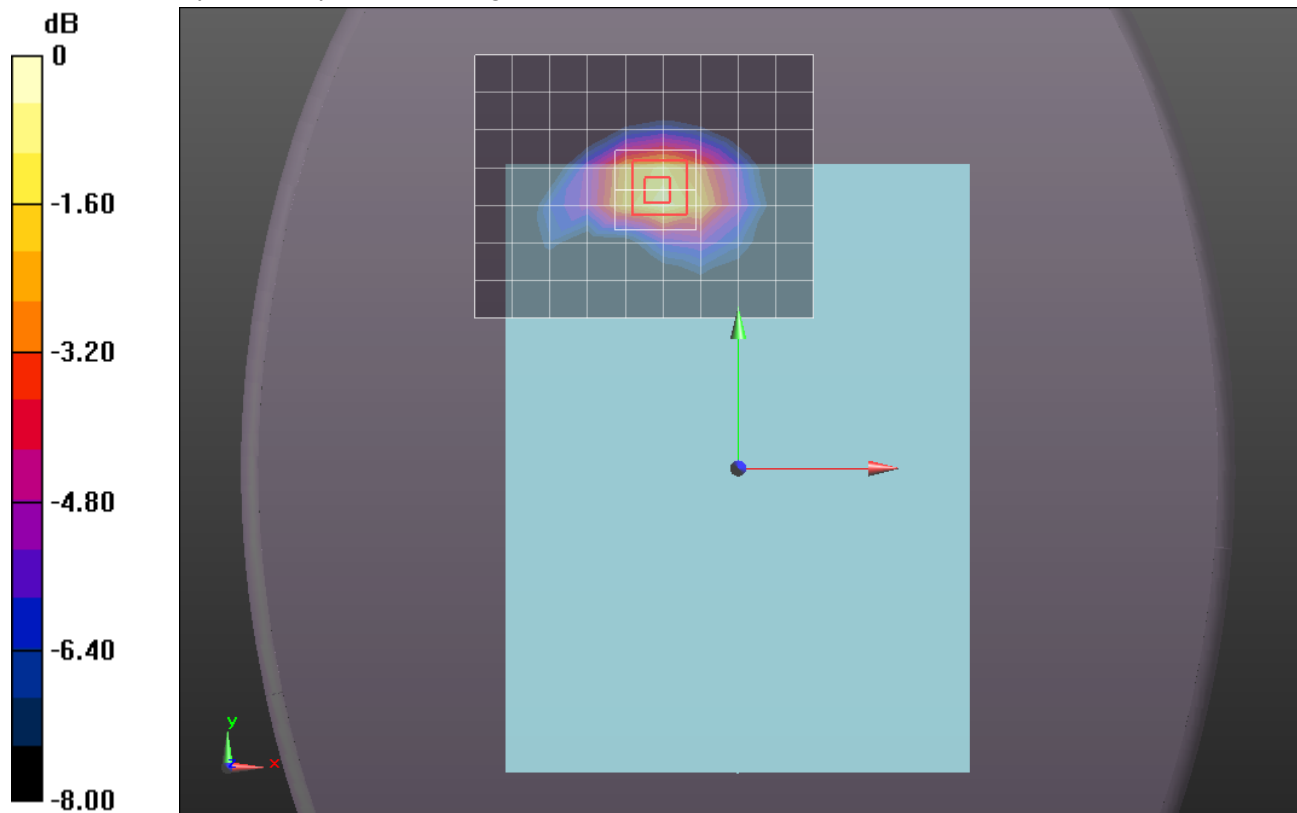

0 dB = 1.160mW/g = 1.29 dB mW/g

W-CDMA Band II

Frequency: 1907.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 51.898$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Rear with 12mm/Rel. 99 RMC 12.2 kbps_Ch 9538/Area Scan (10x8x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.096 mW/g

Rear with 12mm/Rel. 99 RMC 12.2 kbps_Ch 9538/Zoom Scan (5x5x7)/Cube 0: Measurement

grid: dx=8mm, dy=8mm, dz=5mm



Reference Value = 27.846 V/m; Power Drift = -0.0029 dB

Peak SAR (extrapolated) = 1.5040

SAR(1 g) = 0.936 mW/g; SAR(10 g) = 0.548 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.247 mW/g

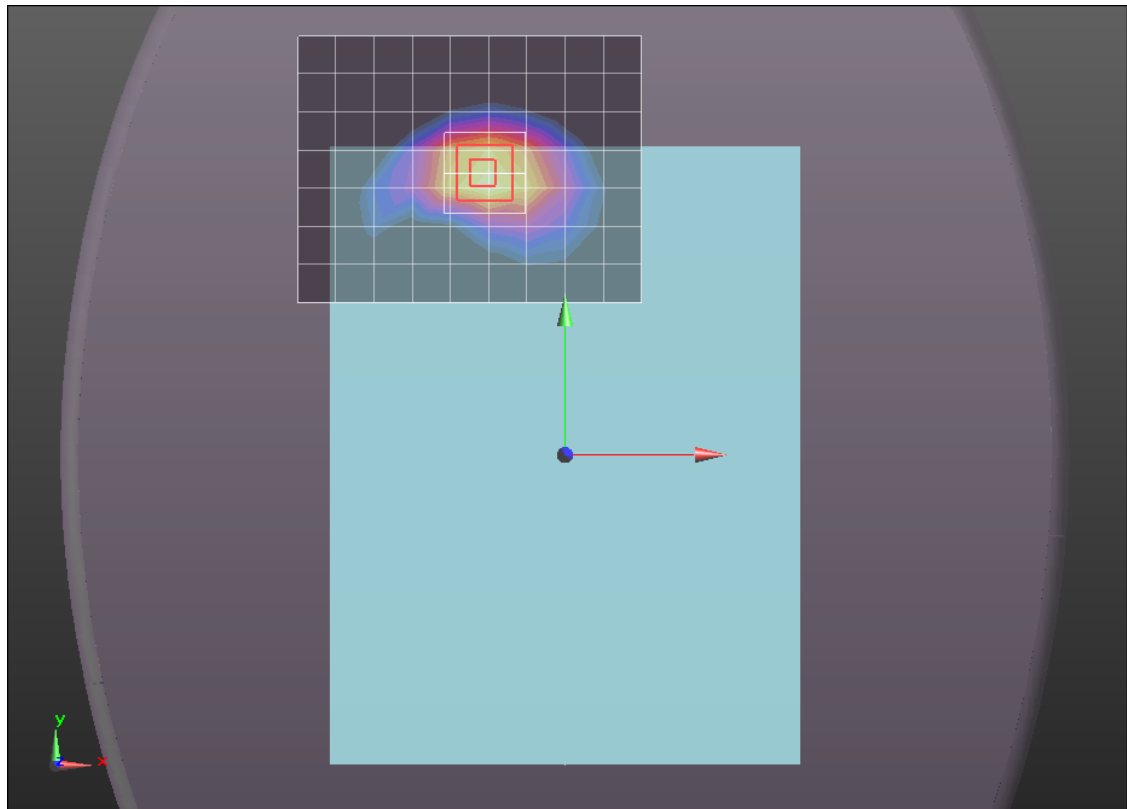

0 dB = 1.250mW/g = 1.94 dB mW/g

W-CDMA Band II

Frequency: 1852.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.486$ mho/m; $\epsilon_r = 52.047$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Edge 1 with 14mm/Rel. 99 RMC 12.2kbps_ ch 9262/Area Scan (6x10x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.823 mW/g

Edge 1 with 14mm/Rel. 99 RMC 12.2kbps_ ch 9262/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 24.377 V/m; Power Drift = 0.004 dB

Peak SAR (extrapolated) = 1.0830

SAR(1 g) = 0.698 mW/g; SAR(10 g) = 0.419 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.906 mW/g

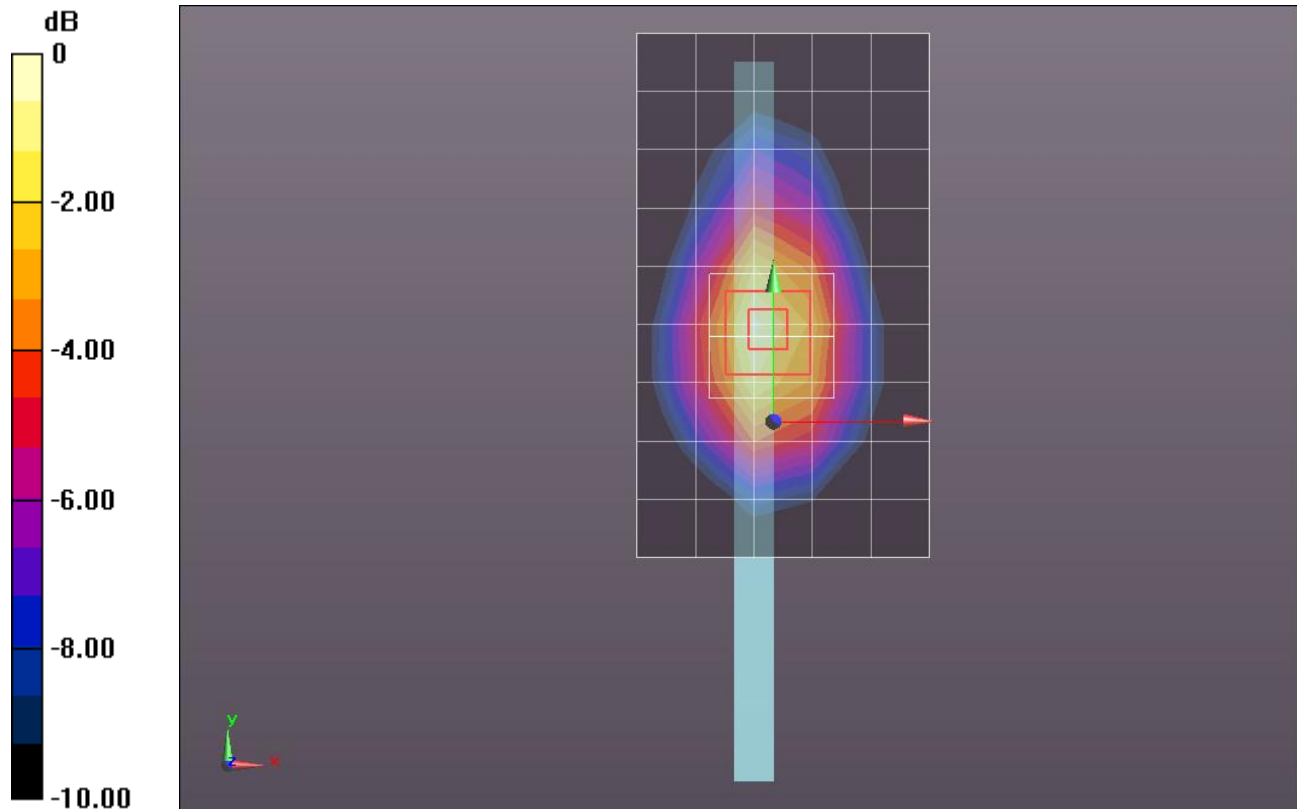

0 dB = 0.910mW/g = -0.82 dB mW/g

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.519$ mho/m; $\epsilon_r = 52.015$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Edge 1 with 14mm/Rel. 99 RMC 12.2kbps_ ch 9400/Area Scan (6x10x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.201 mW/g

Edge 1 with 14mm/Rel. 99 RMC 12.2kbps_ ch 9400/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.403 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.4920

SAR(1 g) = 0.958 mW/g; SAR(10 g) = 0.576 mW/g

Maximum value of SAR (measured) = 1.252 mW/g

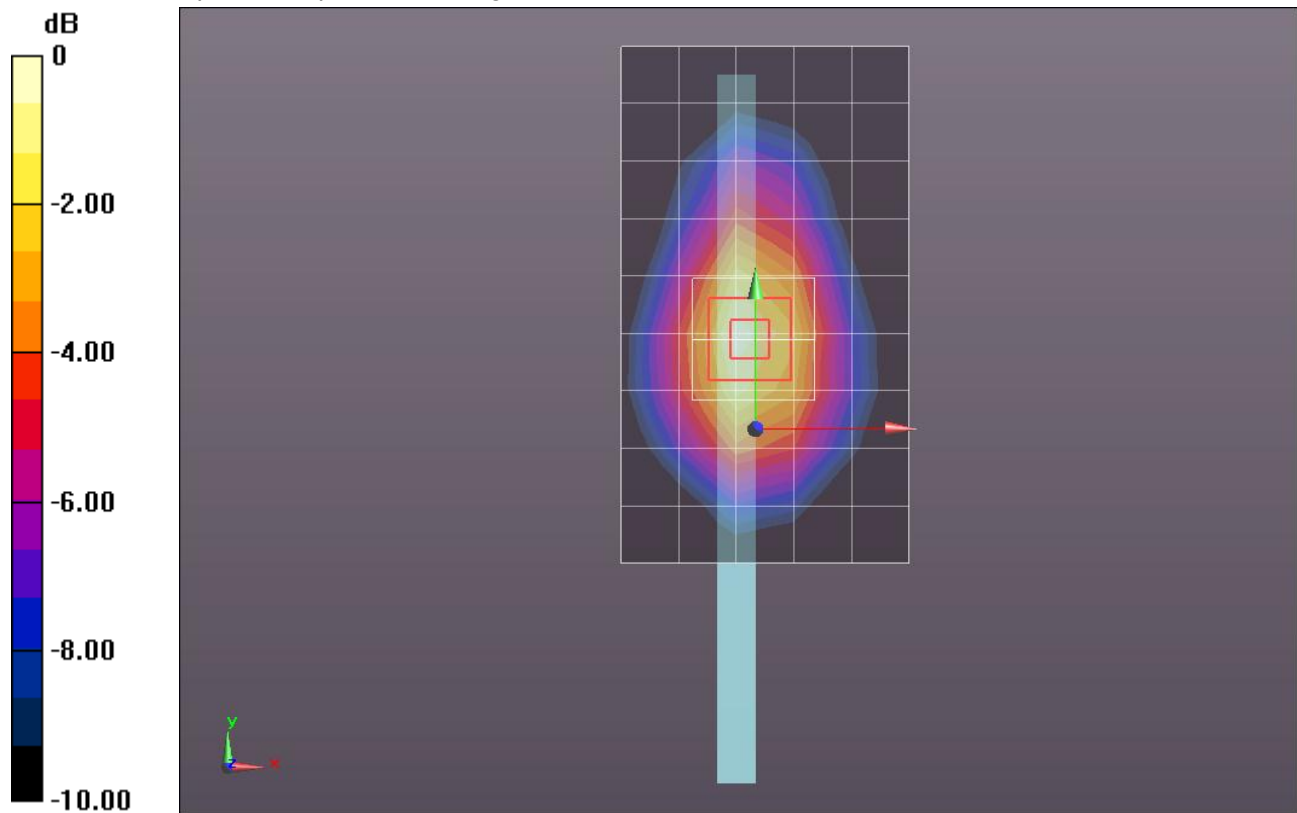

0 dB = 1.250mW/g = 1.94 dB mW/g

W-CDMA Band II

Frequency: 1907.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.553$ mho/m; $\epsilon_r = 51.923$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Edge 1 with 14mm/Rel. 99 RMC 12.2kbps_ ch 9538/Area Scan (6x10x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.277 mW/g

Edge 1 with 14mm/Rel. 99 RMC 12.2kbps_ ch 9538/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm



Reference Value = 28.623 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.5660

SAR(1 g) = 1 mW/g; SAR(10 g) = 0.602 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.302 mW/g

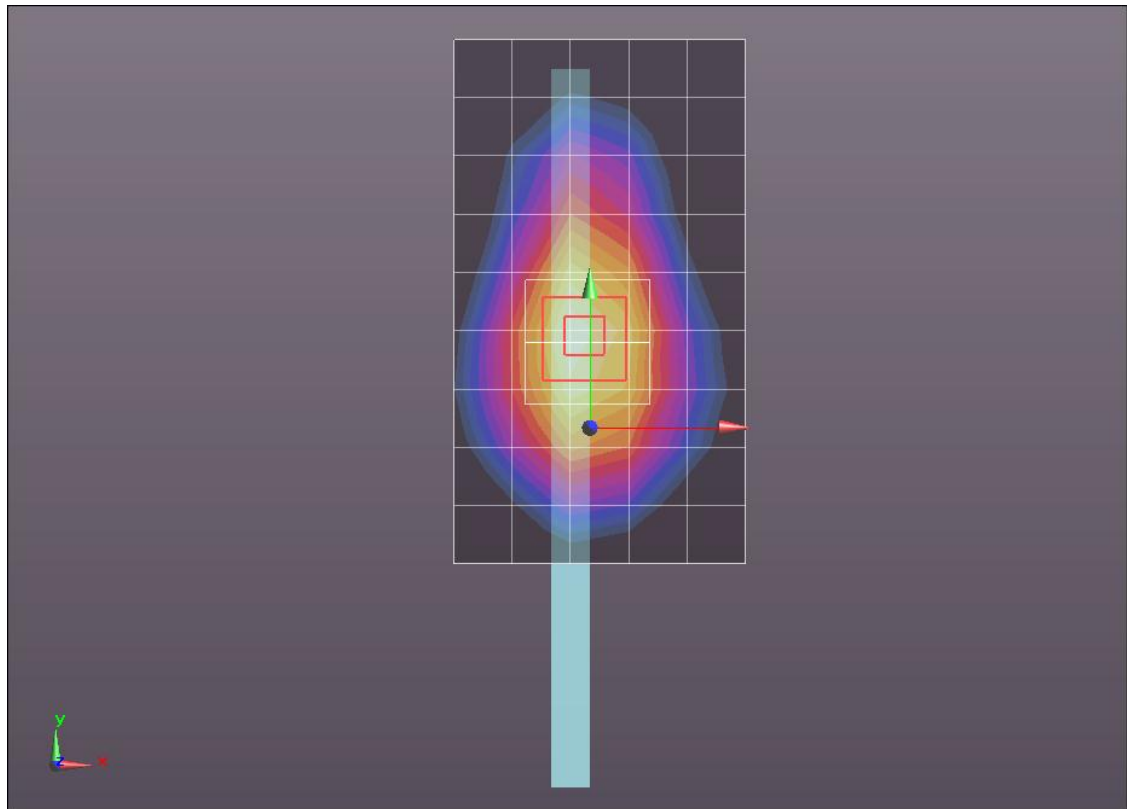

0 dB = 1.300mW/g = 2.28 dB mW/g

W-CDMA Band II

Frequency: 1852.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.059$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012

- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012

- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)

- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

27 deg Right Tilt @ Edge 1/Rel. 99 RMC 12.2kbps_ch 9262/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.562 mW/g

27 deg Right Tilt @ Edge 1/Rel. 99 RMC 12.2kbps_ch 9262/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm



Reference Value = 20.773 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.8900

SAR(1 g) = 0.495 mW/g; SAR(10 g) = 0.265 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.678 mW/g

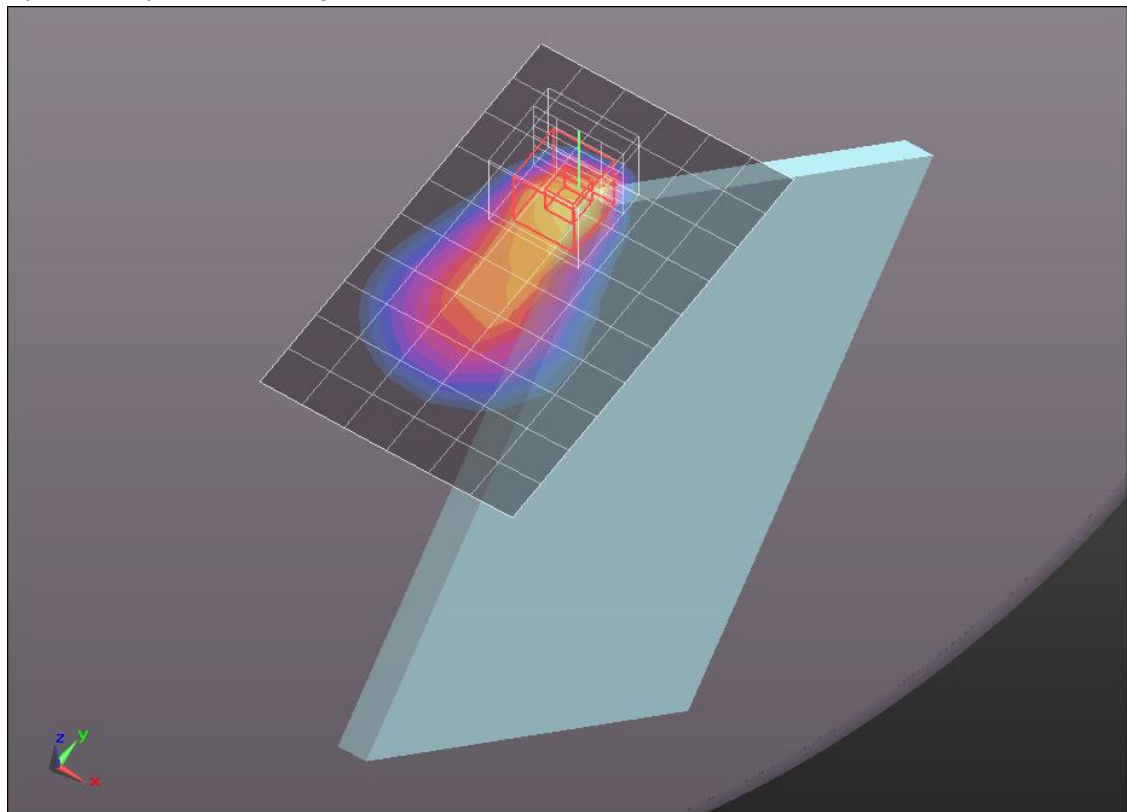

0 dB = 0.680mW/g = -3.35 dB mW/g

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.525$ mho/m; $\epsilon_r = 51.994$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

27 deg Right Tilt @ Edge 1/Rel. 99 RMC 12.2kbps_ch 9400/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.955 mW/g

27 deg Right Tilt @ Edge 1/Rel. 99 RMC 12.2kbps_ch 9400/Zoom Scan (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.826 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.4970

SAR(1 g) = 0.832 mW/g; SAR(10 g) = 0.444 mW/g

Maximum value of SAR (measured) = 1.141 mW/g

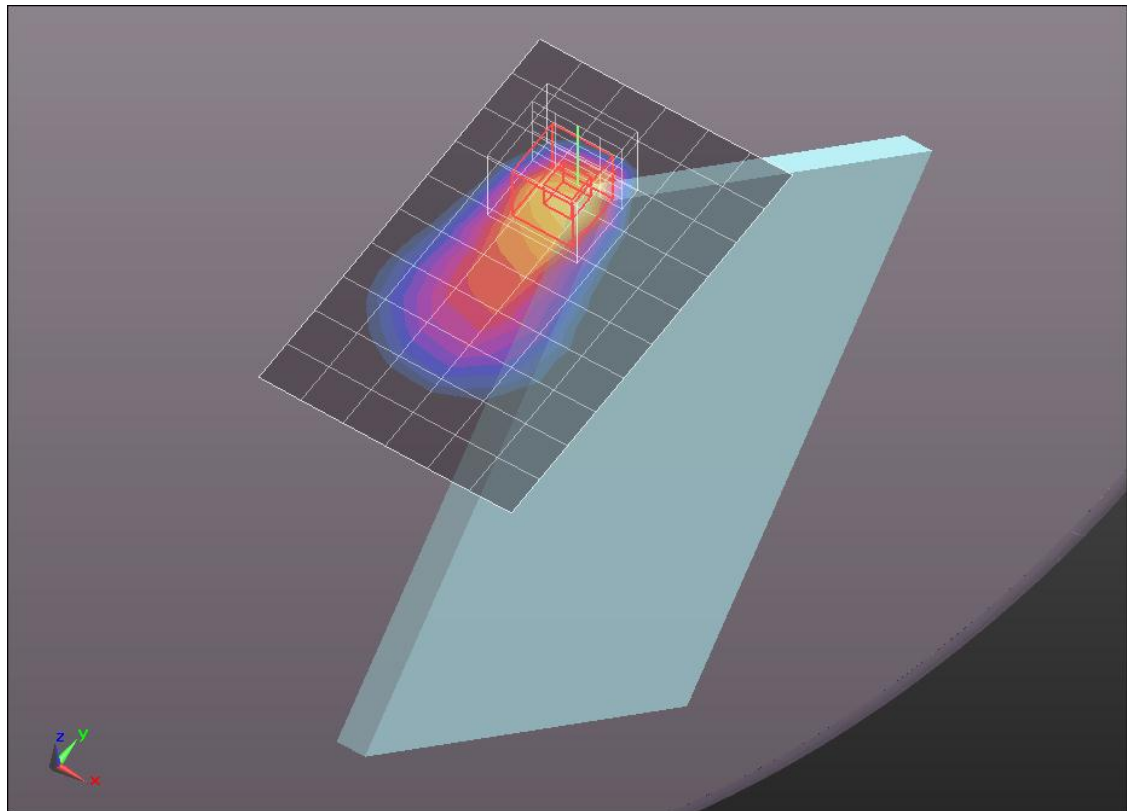

0 dB = 1.140mW/g = 1.14 dB mW/g

W-CDMA Band II

Frequency: 1907.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 51.898$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

27 deg Right Tilt @ Edge 1/Rel. 99 RMC 12.2kbps_ch 9538/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.133 mW/g

27 deg Right Tilt @ Edge 1/Rel. 99 RMC 12.2kbps_ch 9538/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm



Reference Value = 28.572 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.7950

SAR(1 g) = 0.975 mW/g; SAR(10 g) = 0.512 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.338 mW/g

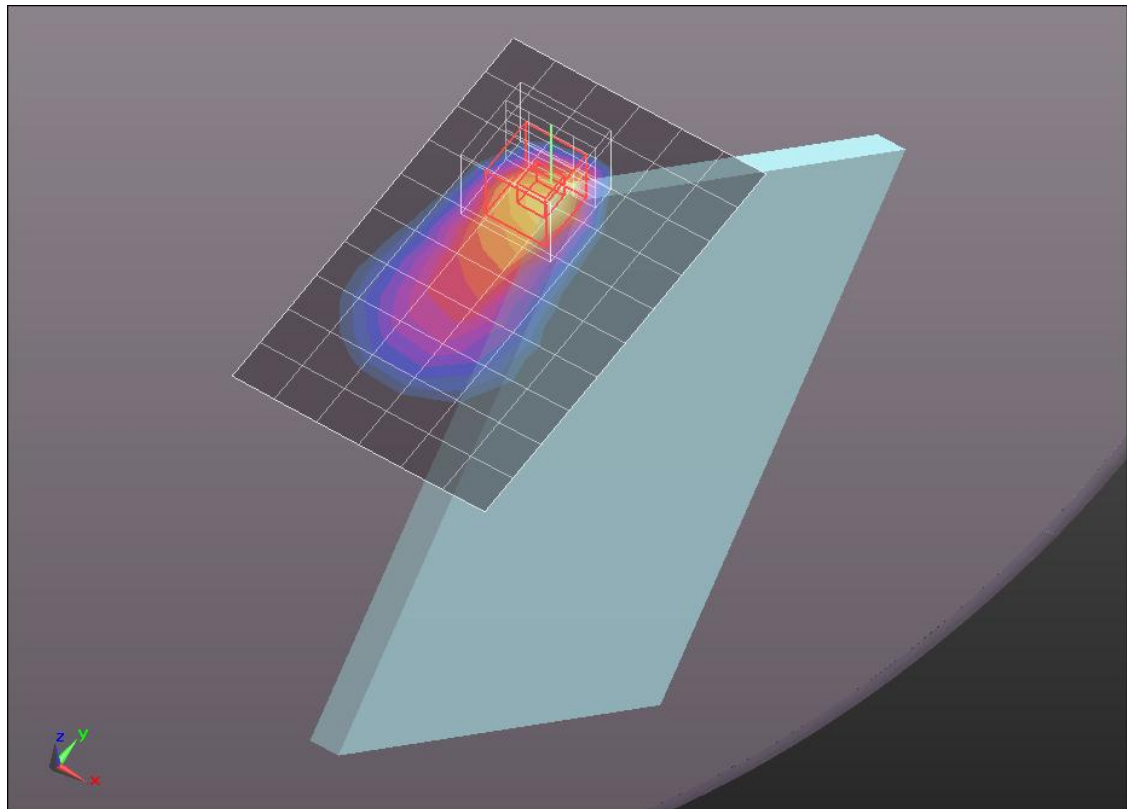

0 dB = 1.340mW/g = 2.54 dB mW/g

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:2.18776; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.525$ mho/m; $\epsilon_r = 51.994$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Edge 2/Rel. 99 RMC12.2kbps_ch 9400/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.844 mW/g



Edge 2/Rel. 99 RMC12.2kbps_ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.898 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.1750

SAR(1 g) = 0.608 mW/g; SAR(10 g) = 0.312 mW/g

Maximum value of SAR (measured) = 0.922 mW/g

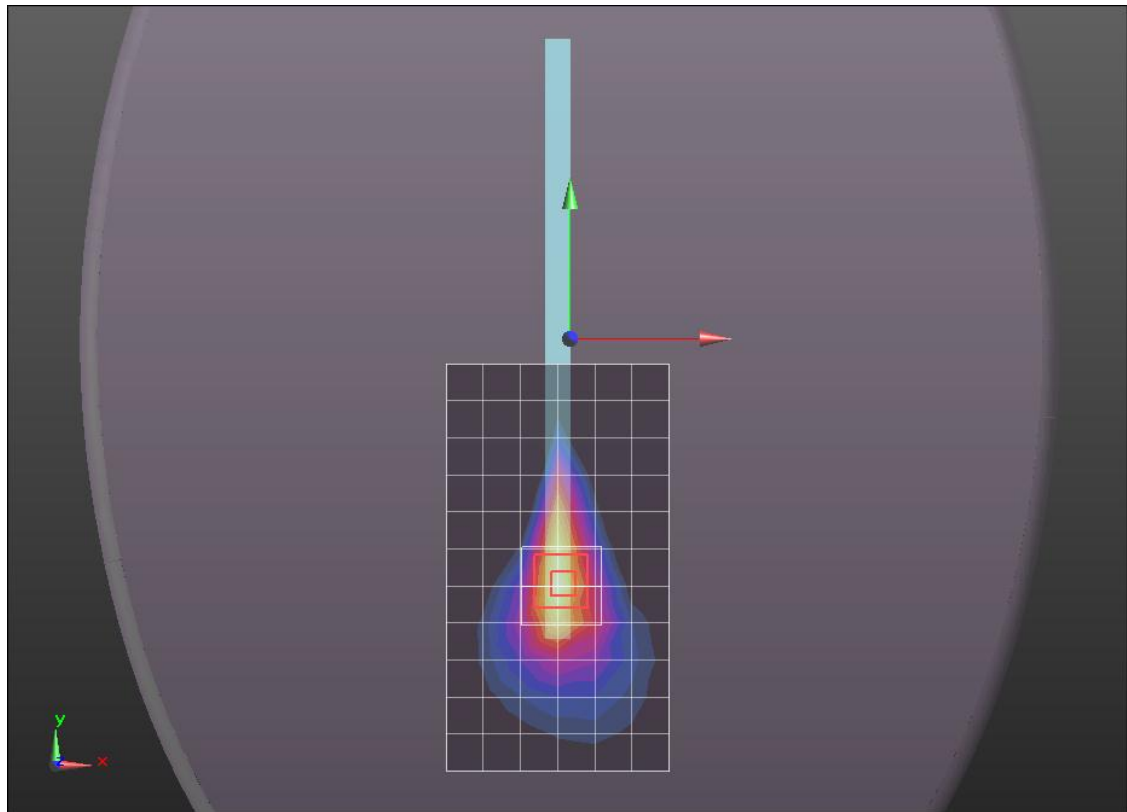

0 dB = 0.920mW/g = -0.72 dB mW/g