



FCC 47 CFR PART 15 SUBPART C

**BLUETOOTH LOW ENERGY
CERTIFICATION TEST REPORT**

FOR

WIRELESS DEVICE

MODEL NUMBER: A1845

FCC ID: BCGA1845

REPORT NUMBER: 16U23820-E4V2

ISSUE DATE: JANUARY 24, 2017

Prepared for

APPLE, INC.

1 INFINITE LOOP

CUPERTINO, CA 95014, U.S.A.

Prepared by

UL VERIFICATION SERVICES INC.

47173 BENICIA STREET

FREMONT, CA 94538, U.S.A.

TEL: (510) 771-1000

FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	01/23/2017	Initial Issue	Mengistu Mekuria
V1	01/24/2017	Address TCB's Request	Mengistu Mekuria

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. SAMPLE CALCULATION	7
4.3. MEASUREMENT UNCERTAINTY.....	7
5. EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF EUT	8
5.2. MAXIMUM OUTPUT POWER.....	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	8
5.4. SOFTWARE AND FIRMWARE.....	8
5.5. WORST-CASE CONFIGURATION AND MODE.....	9
5.6. DESCRIPTION OF TEST SETUP.....	10
6. TEST AND MEASUREMENT EQUIPMENT	15
7. ANTENNA PORT TEST RESULTS	16
7.1. MEASUREMENT METHODS	16
7.2. ON TIME, DUTY CYCLE	17
7.3. 6 dB BANDWIDTH.....	18
7.4. 99% BANDWIDTH.....	21
7.5. AVERAGE POWER	24
7.6. OUTPUT POWER.....	25
7.7. POWER SPECTRAL DENSITY	26
7.8. CONDUCTED SPURIOUS EMISSIONS.....	29
8. RADIATED TEST RESULTS.....	33
8.1. LIMITS AND PROCEDURE	33
8.2. TRANSMITTER ABOVE 1 GHz.....	34
8.2.1. RESTRICTED BANDEDGE	34
8.2.2. HARMONICS AND SPURIOUS EMISSIONS	38
8.3. WORST-CASE BELOW 1 GHz.....	44
8.4. WORST-CASE 18 to 26 GHz.....	46
9. AC POWER LINE CONDUCTED EMISSIONS	48

10. SETUP PHOTOS	51
-------------------------------	-----------

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: WIRELESS DEVICE

MODEL: A1845

SERIAL NUMBER: 3136


DATE TESTED: NOVEMBER 18-23, 2016

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



MENGISTU MEKURIA
SENIOR ENGINEER
UL VERIFICATION SERVICES INC.

Prepared By:



TONY LI
EMC ENGINEER
UL VERIFICATION SERVICES INC.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, KDB 558074 D01 v03r05, ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A	☐ Chamber D
☐ Chamber B	☐ Chamber E
☐ Chamber C	☒ Chamber F
	☐ Chamber G
	☐ Chamber H

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through H are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-8, respectively.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is wireless device with BLE and NFC capability

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	BLE	3.94	2.48

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Band (GHz)	Antenna Gain (dBi)
2.4	-2.64

5.4. SOFTWARE AND FIRMWARE

The BLE firmware version 10.31 and testing was performed with Nordic BLE python script.

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz, from 18 to 26GHz, and power line conducted emission tests were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated under three orthogonal orientations X (Flatbed), Y (Landscape), and Z (Portrait). The Z (Portrait) orientation was determined to be the worst-case orientation. Therefore, all final radiated testing was performed with the EUT in Z (Portrait) orientation.

Worst-case data rates as provided by the client were:

BLE: 1 Mbps.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Apple	MacBook Pro	73043BDQAGU	N/A
DC power supply	Sorensen	XT 15-4	1319A02779	N/A

I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC	1	4 pins connector	Un-Shielded	1	N/A
2	Antenna	1	Spectrum Analyzer	Un-Shielded	0.1	N/A
3	USB	1	Laptop	Un-Shielded	1	N/A

I/O CABLES (RADIATED BELOW AND ABOVE 1 GHZ)


I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC	1	4 pins connector	Un-Shielded	1	N/A
2	AC	1	AC	Un-shielded	3	N/A

I/O CABLES (AC LINE CONDUCTED: AC/DC ADAPTER)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC	1	DC	Un-shielded	1	N/A
2	AC	1	AC	Un-shielded	3	N/A


TEST SETUP- CONDUCTED PORT

SETUP DIAGRAM

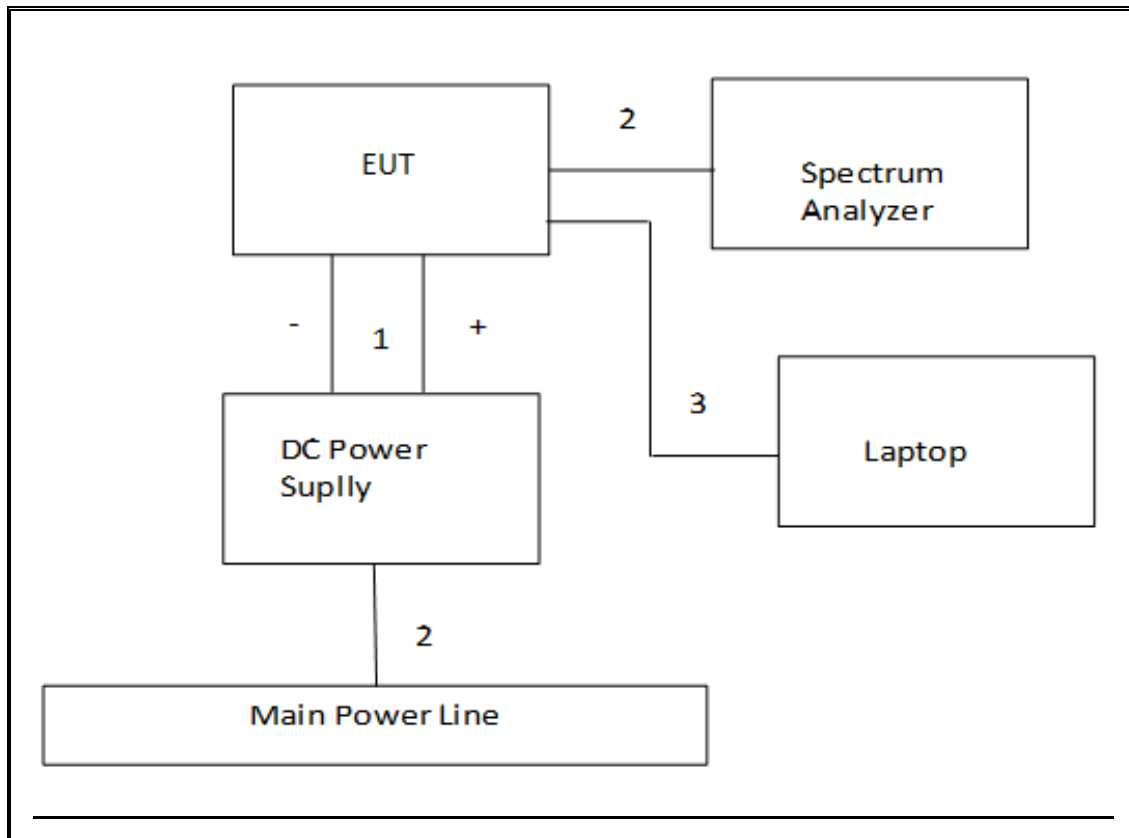


TEST SETUP- RADIATED-ABOVE 1 GHZ

SETUP DIAGRAM

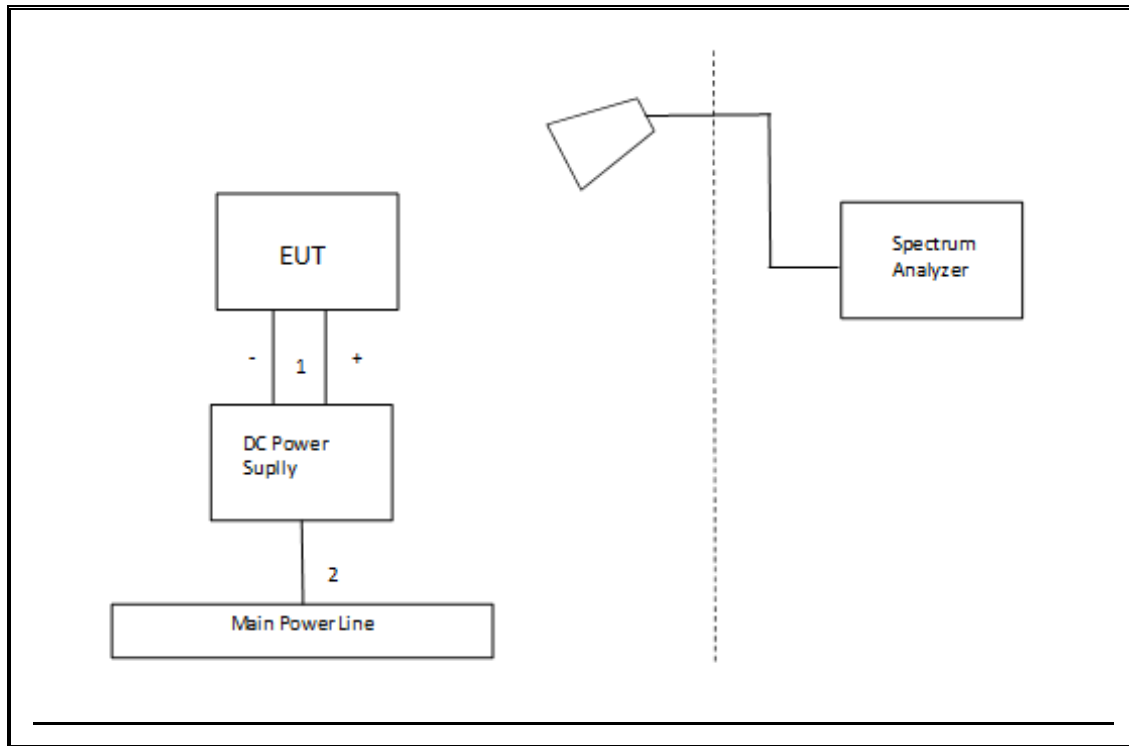


TEST SETUP- BELOW 1GHz

SETUP DIAGRAM

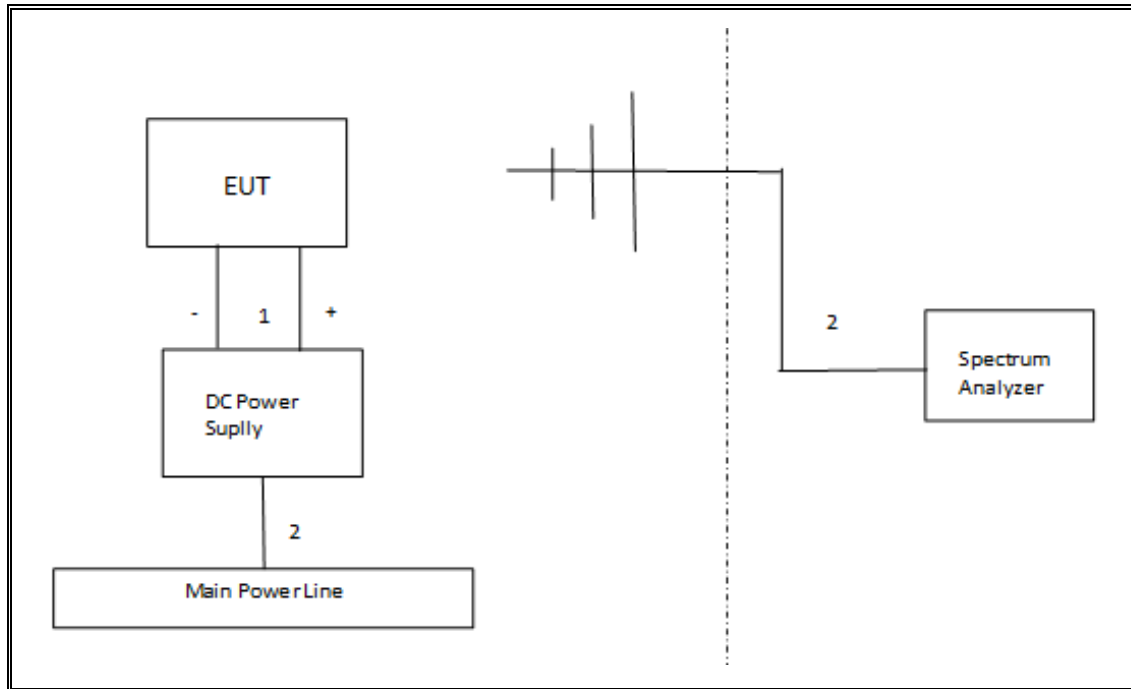

AC LINE SETUP DIAGRAM

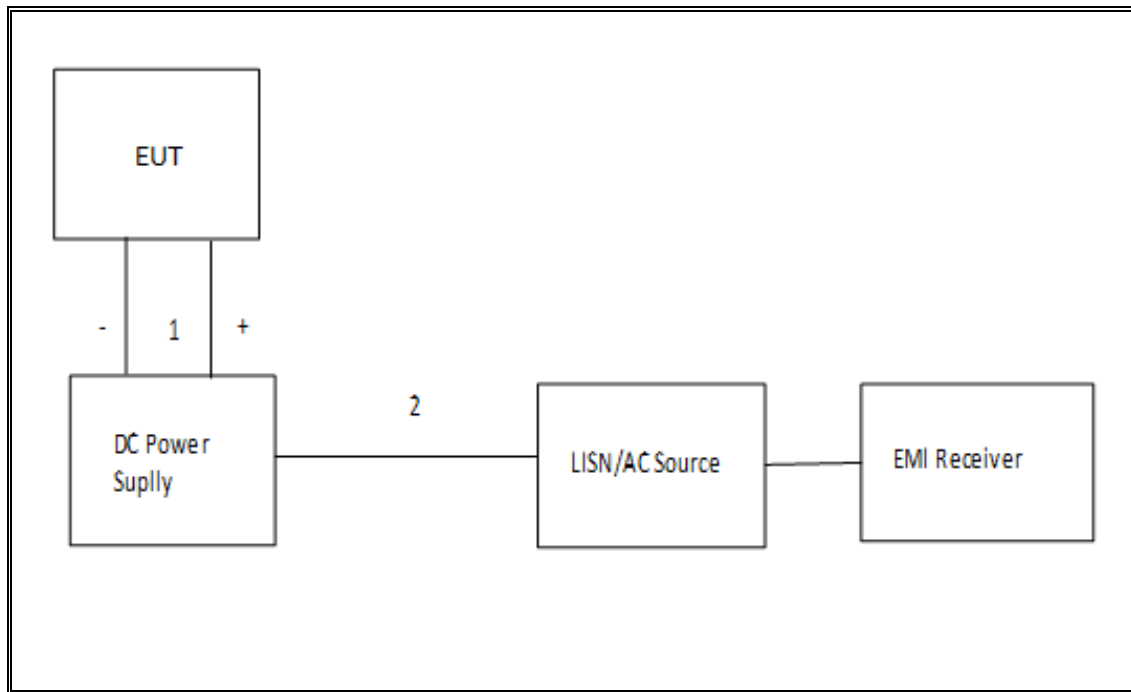

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn 1-18GHz	ETS Lindgren	3117	00143449	4/5/2017
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	A022813-1	1/29/2017
Amplifier, 1 - 18GHz	Miteq	AFS42-00101800-25-S-42	1782158	1/25/2017
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	185623	6/17/2017
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight	N9030A	MY51380907	9/22/2017
Power Meter, P-series single channel	Keysight	N1911A	MY53060010	3/17/2017
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Keysight	N1921A	MY53260010	6/20/2017
Antenna, Horn 18 to 26.5GHz	ARA	MWH-1826	1049	6/6/2017
Amplifier, 1 to 26.5GHz, 23.5dB Gain minimum	Keysight	8449B	3008A04710	7/5/2017
AC Line Conducted				
EMI Test Receiver 9Khz-7GHz	Rohde & Schwarz	ESCI7	100935	9/13/2017
LISN for Conducted Emissions CISPR-16	Fischer	50/250-25-2	161124	2/9/2017
Power Cable, Line Conducted Emissions	UL	PG1	N/A	9/1/2017
UL SOFTWARE				
* Radiated Software	UL	UL EMC	Ver 9.5, April 26, 2016	
* Conducted Software	UL	UL EMC	Ver 2.2, March 31, 2015	
* AC Line Conducted Software	UL	UL EMC	Ver 9.5, April 3, 2015	

Note: * indicates automation software version used in the compliance certification testing

7. ANTENNA PORT TEST RESULTS

7.1. MEASUREMENT METHODS

6 dB BW: KDB 558074 D01 v03r05, Section 8.1.

Output Power: KDB 558074 D01 v03r05, Section 9.1.2.

Power Spectral Density: KDB 558074 D01 v03r05, Section 10.2.

Out-of-band emissions in non-restricted bands: KDB 558074 D01 v03r05, Section 11.0.

Out-of-band emissions in restricted bands: KDB 558074 D01 v03r05, Section 12.1.

Band-edge: KDB 558074 D01 v03r05, Section 12.1.

7.2. ON TIME, DUTY CYCLE

LIMITS

None; for reporting purposes only.


PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time (msec)	Period (msec)	Duty Cycle (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
BLE	0.392	0.626	0.627	62.66%	2.03	2.551

DUTY CYCLE PLOTS

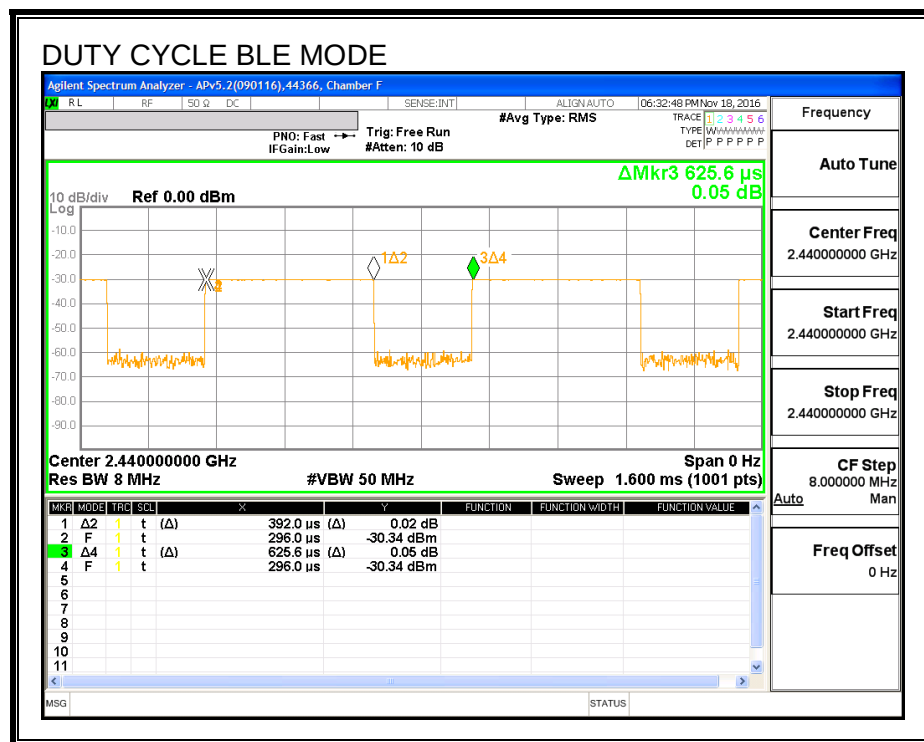

7.3. 6 dB BANDWIDTH

LIMITS



FCC §15.247 (a) (2)


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.674	0.5
Middle	2440	0.678	0.5
High	2480	0.680	0.5

6 dB BANDWIDTH

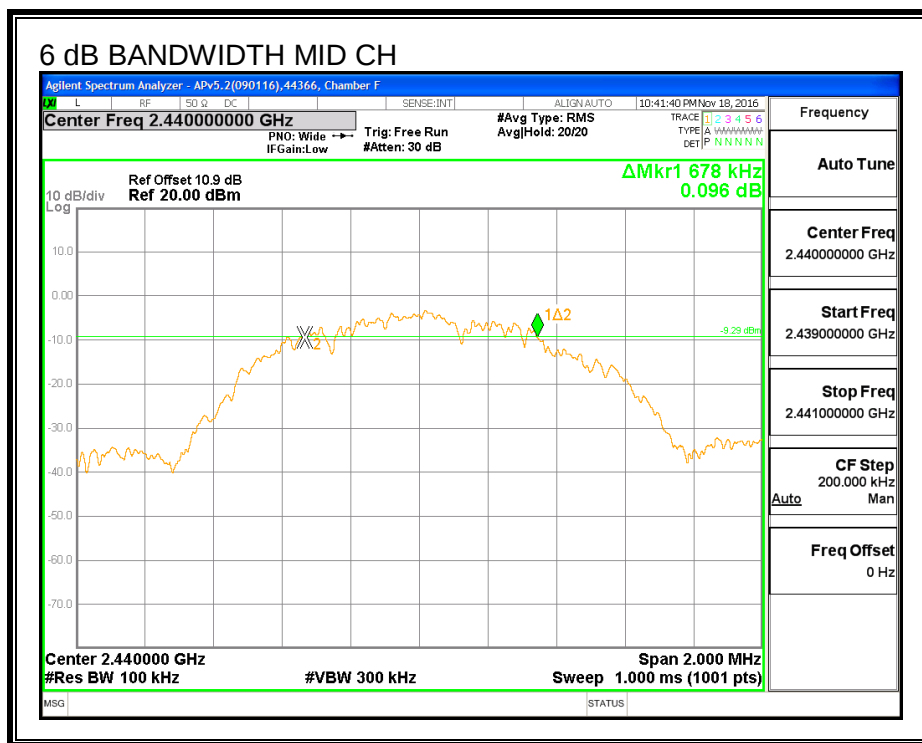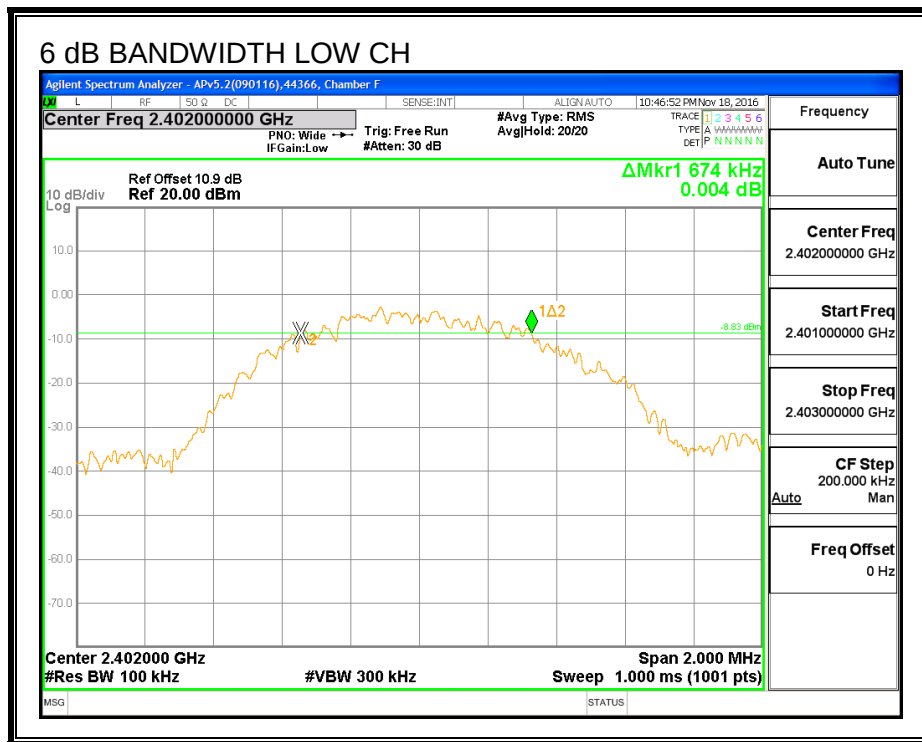

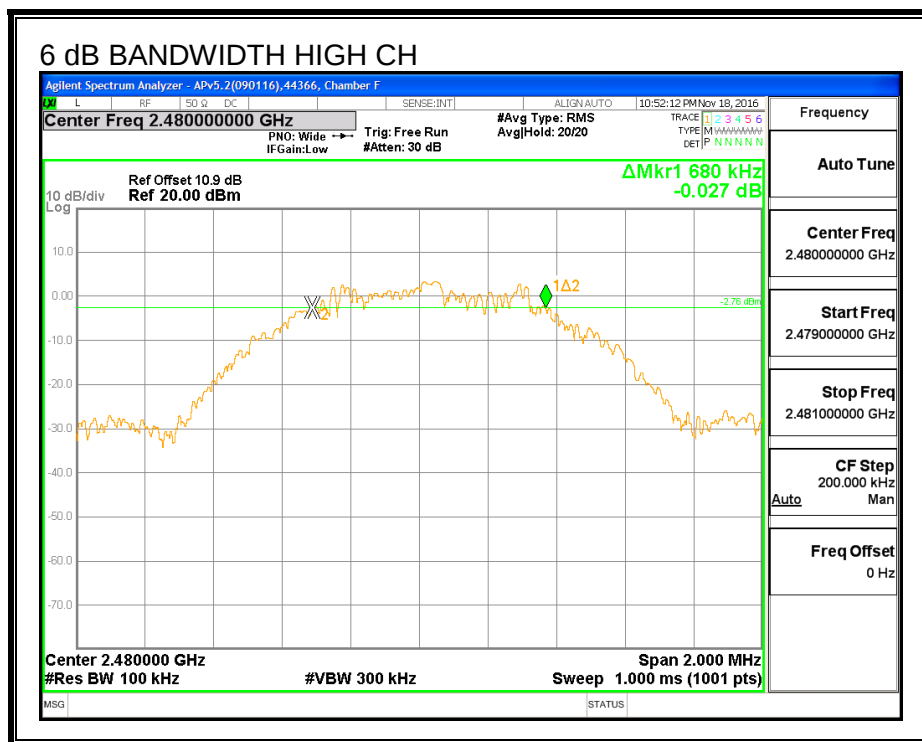

7.4. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth and to 1% of the span. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.0481
Middle	2440	1.0446
High	2480	1.0500

99% BANDWIDTH

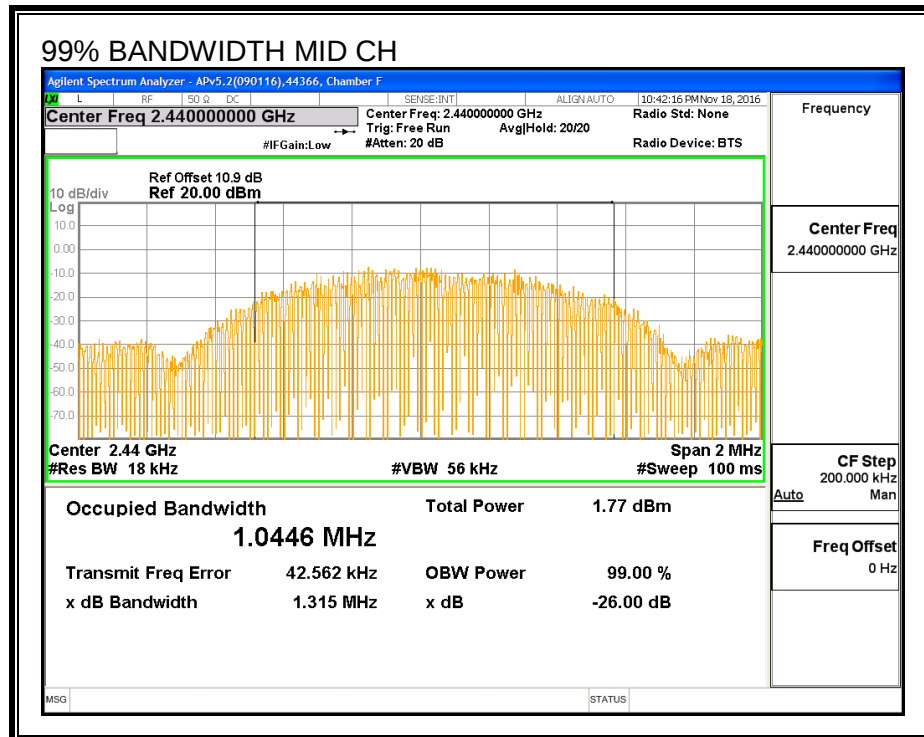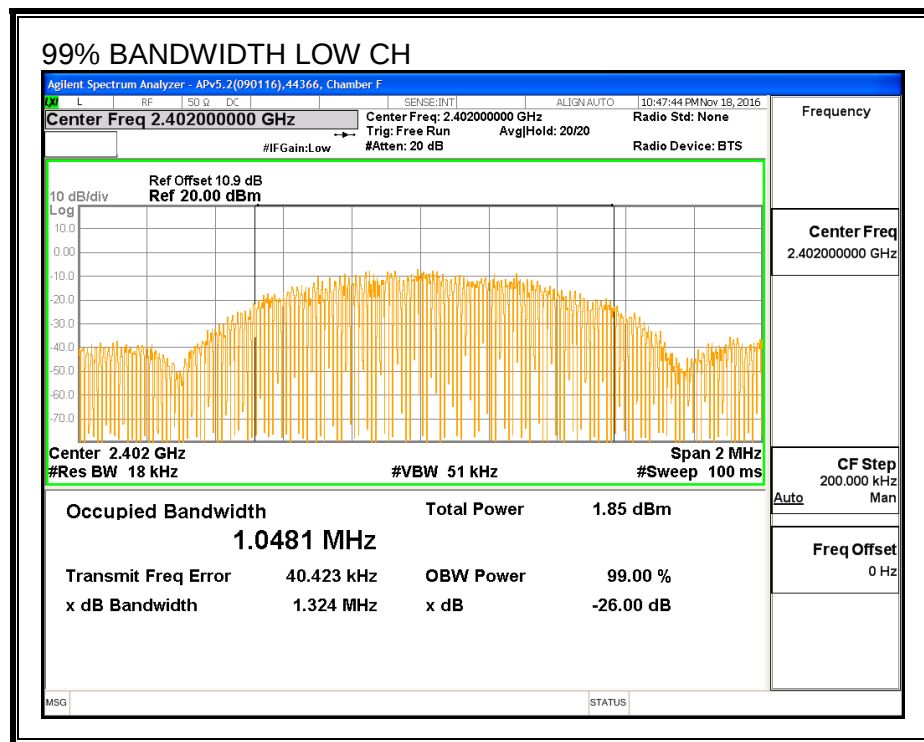

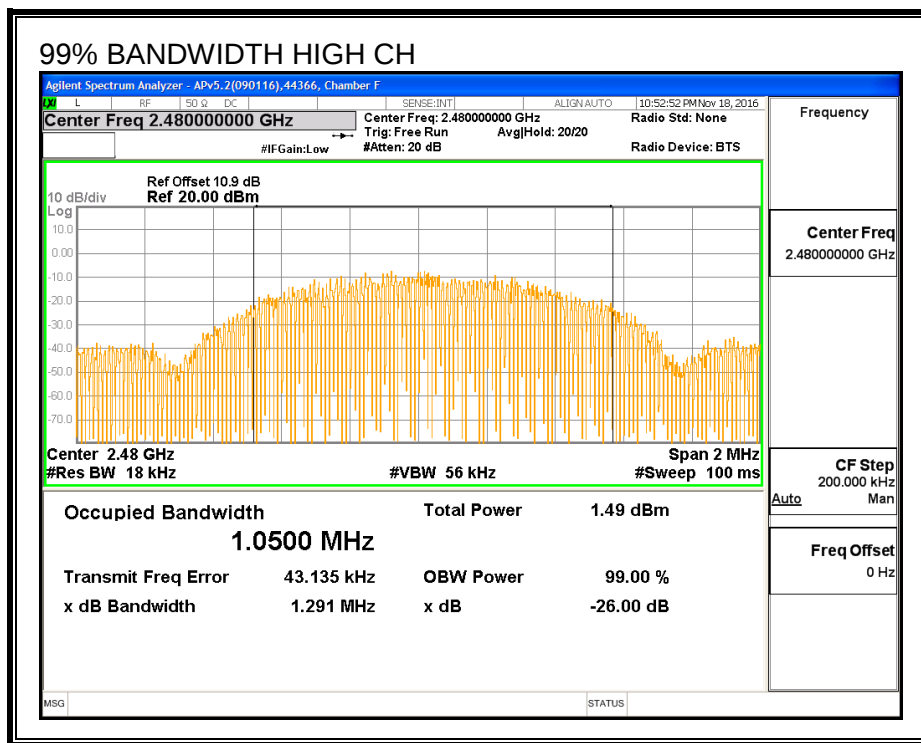

7.5. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a wideband gated power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

ID:	44366	Date:	11/18/16
------------	-------	--------------	----------

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	3.83
Middle	2440	3.70
High	2480	3.51

7.6. OUTPUT POWER

LIMITS

FCC §15.247 (b)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output is connected to a wideband power meter.

RESULTS

ID:	44366	Date:	11/18/16
------------	-------	--------------	----------

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	3.94	30	-26.060
Middle	2440	3.82	30	-26.180
High	2480	3.64	30	-26.360

7.7. POWER SPECTRAL DENSITY

LIMITS



FCC §15.247 (e)


The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

RESULTS

Channel	Frequency (MHz)	PSD (dBm)	Limit (dBm)	Margin (dB)
Low	2402	-11.402	8	-19.40
Middle	2440	-11.474	8	-19.47
High	2480	-11.810	8	-19.81

POWER SPECTRAL DENSITY

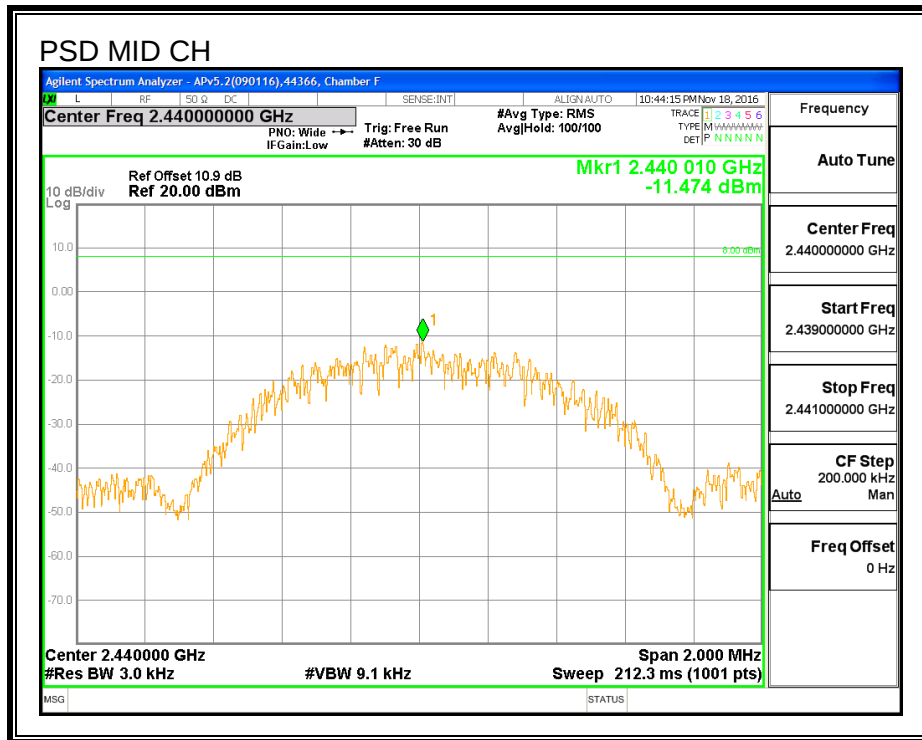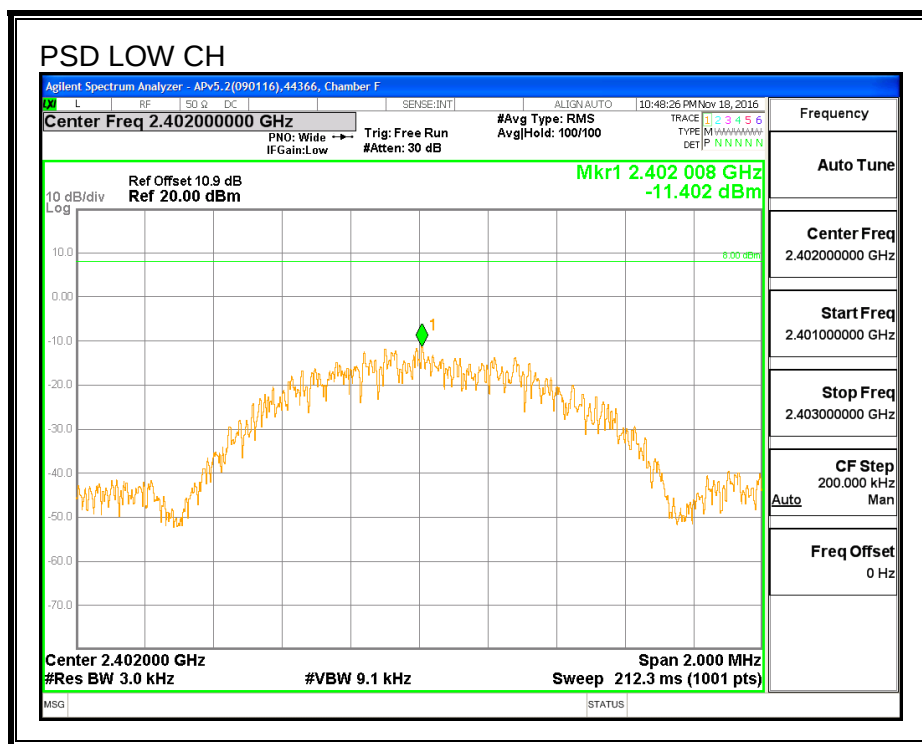

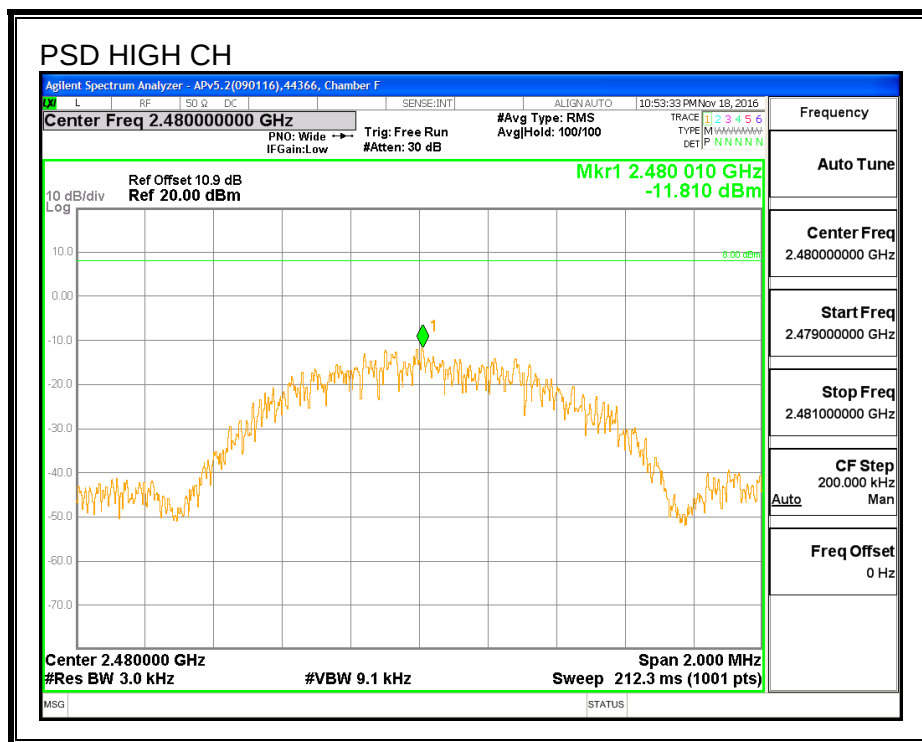

7.8. CONDUCTED SPURIOUS EMISSIONS



LIMITS

FCC §15.247 (d)



Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

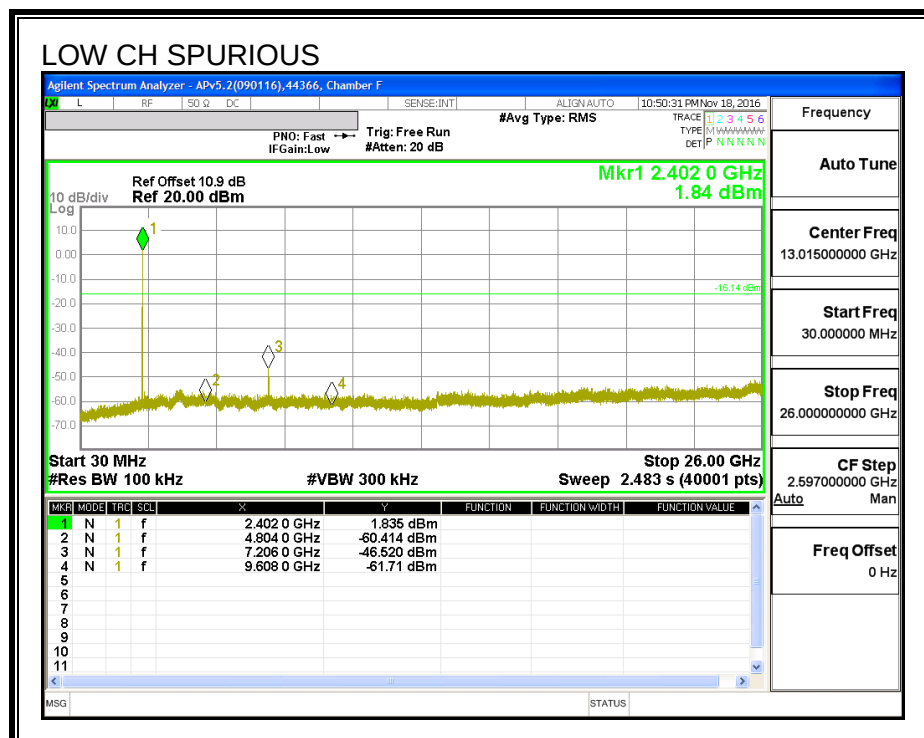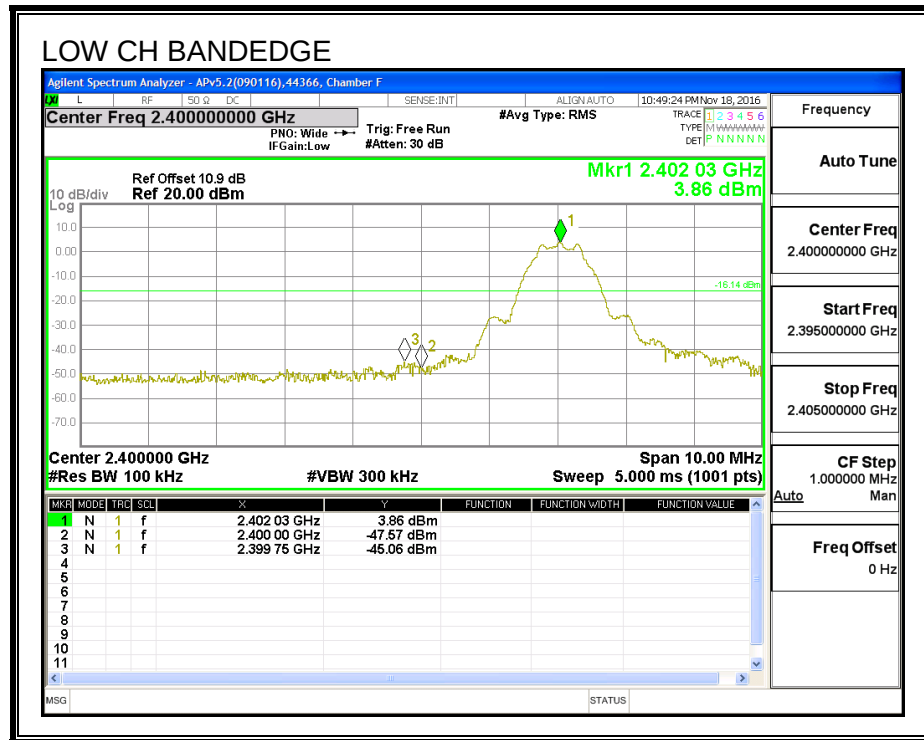

SPURIOUS EMISSIONS, MID CHANNEL

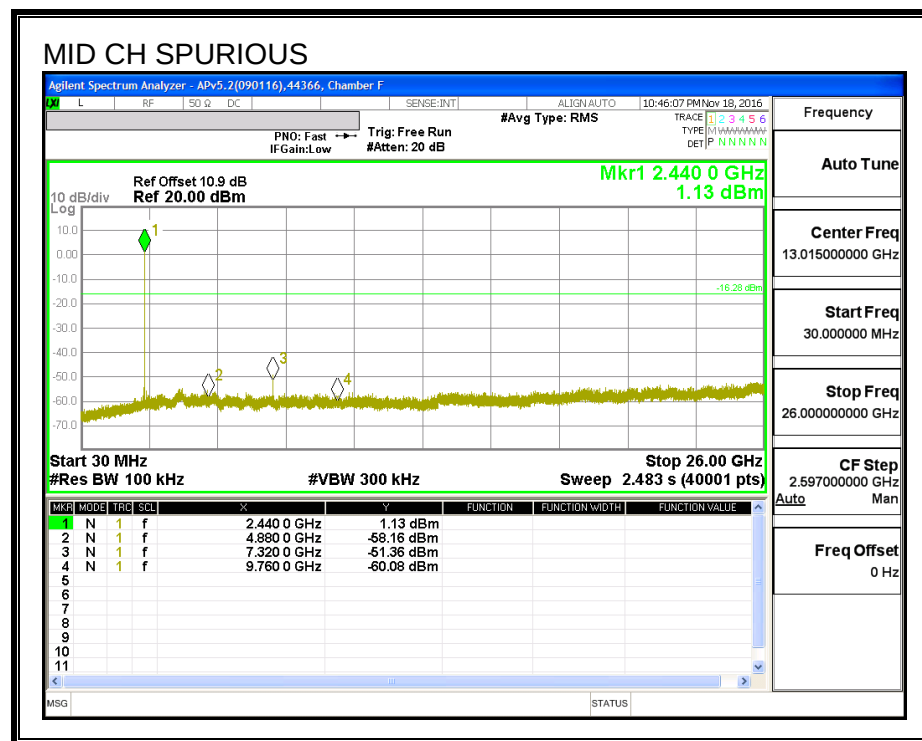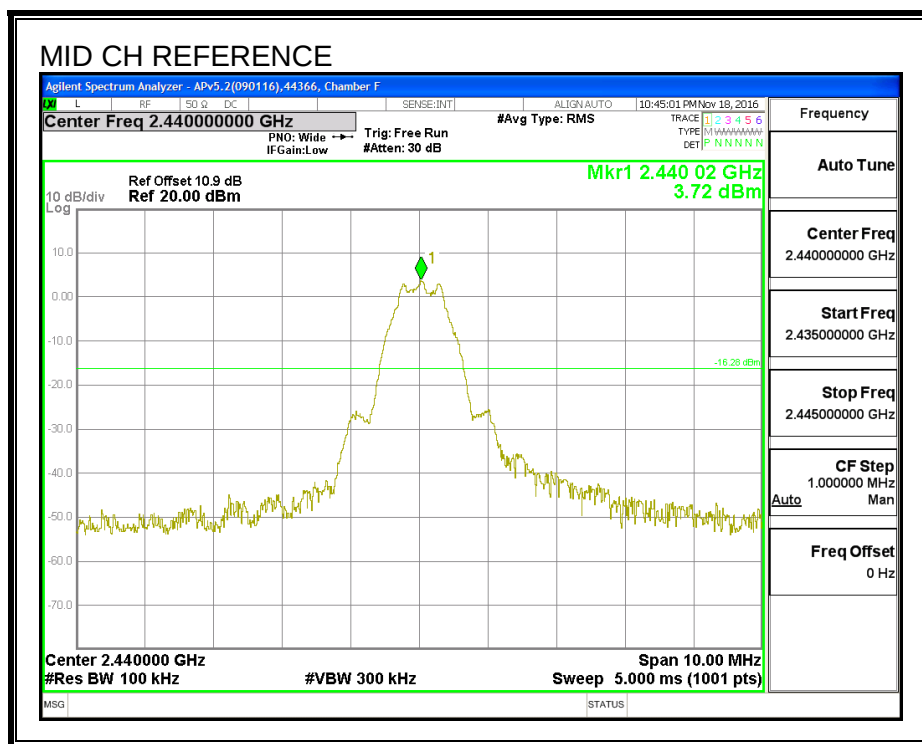

SPURIOUS EMISSIONS, HIGH CHANNEL

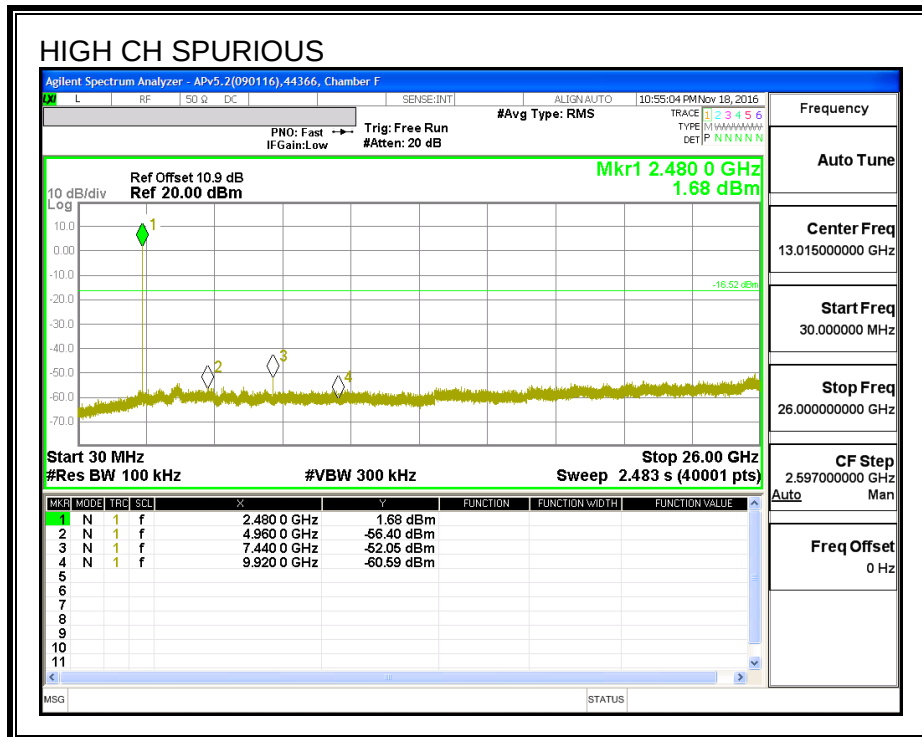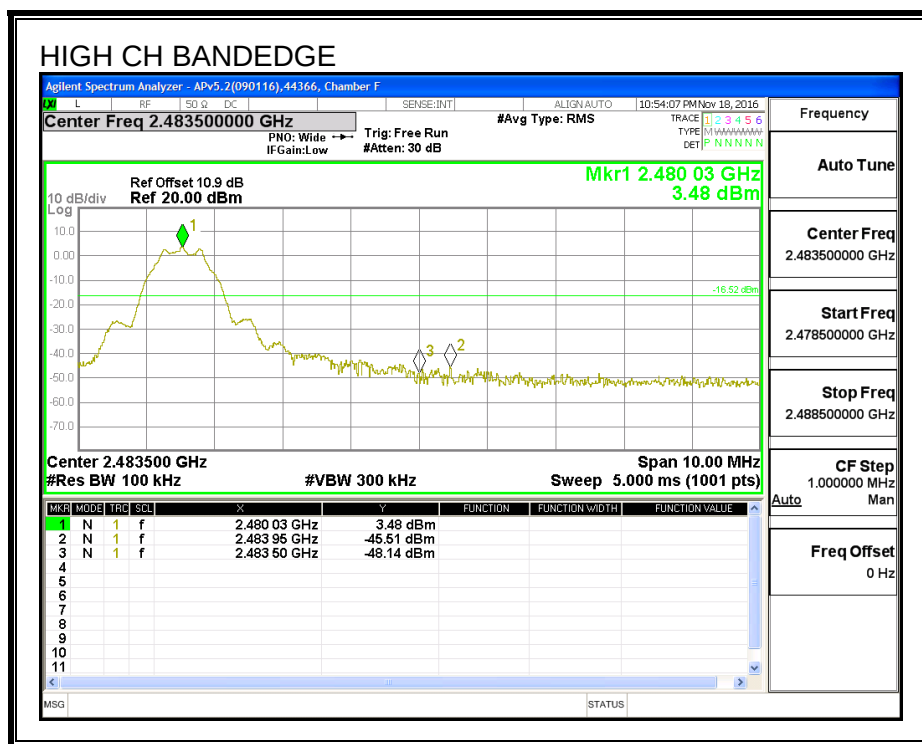

8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

Frequency Range (MHz)	Field Strength Limit (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.


For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

8.2. TRANSMITTER ABOVE 1 GHz

8.2.1. RESTRICTED BANDEGE

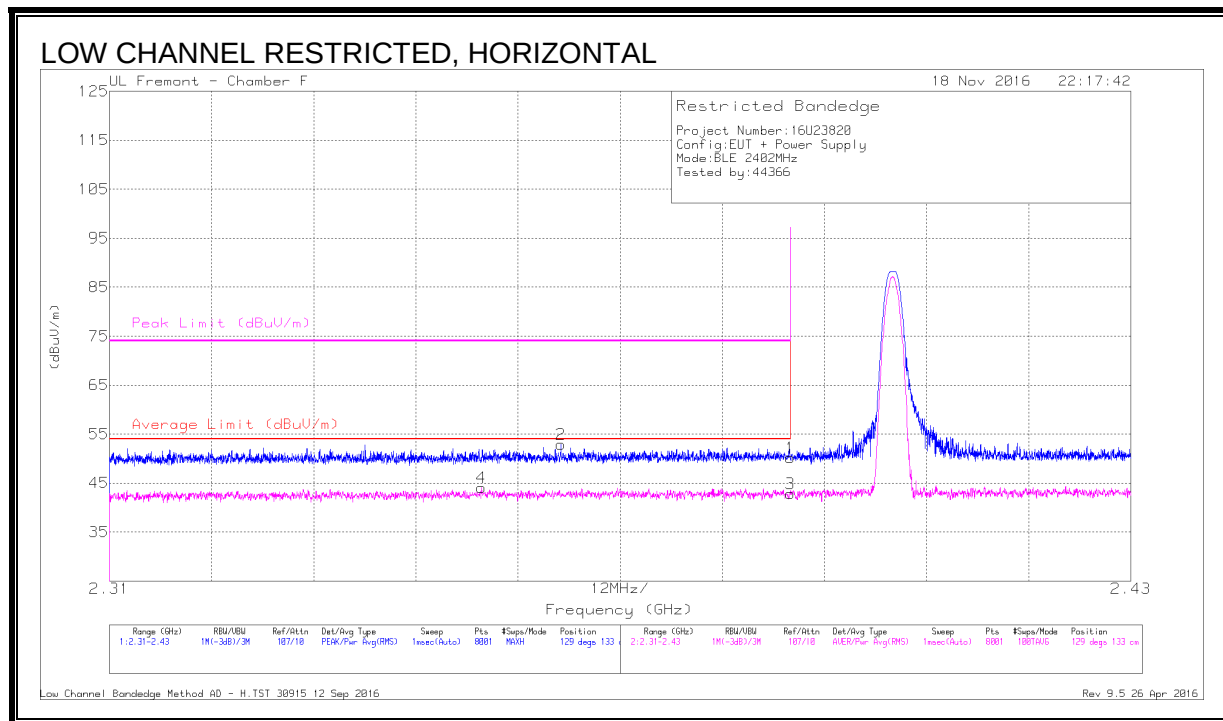


DATA

7	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT344 (dB/m)	Amp/Cbl/Filtr/ Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	39.02	Pk	32.1	-20.9	0	50.22	-	-	74	-23.78	129	133	H
2	* 2.363	41.75	Pk	32	-20.9	0	52.85	-	-	74	-21.15	129	133	H
3	* 2.39	29.65	RMS	32.1	-20.9	2.03	42.88	54	-11.12	-	-	129	133	H
4	* 2.354	30.99	RMS	32	-20.9	2.03	44.12	54	-9.88	-	-	129	133	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

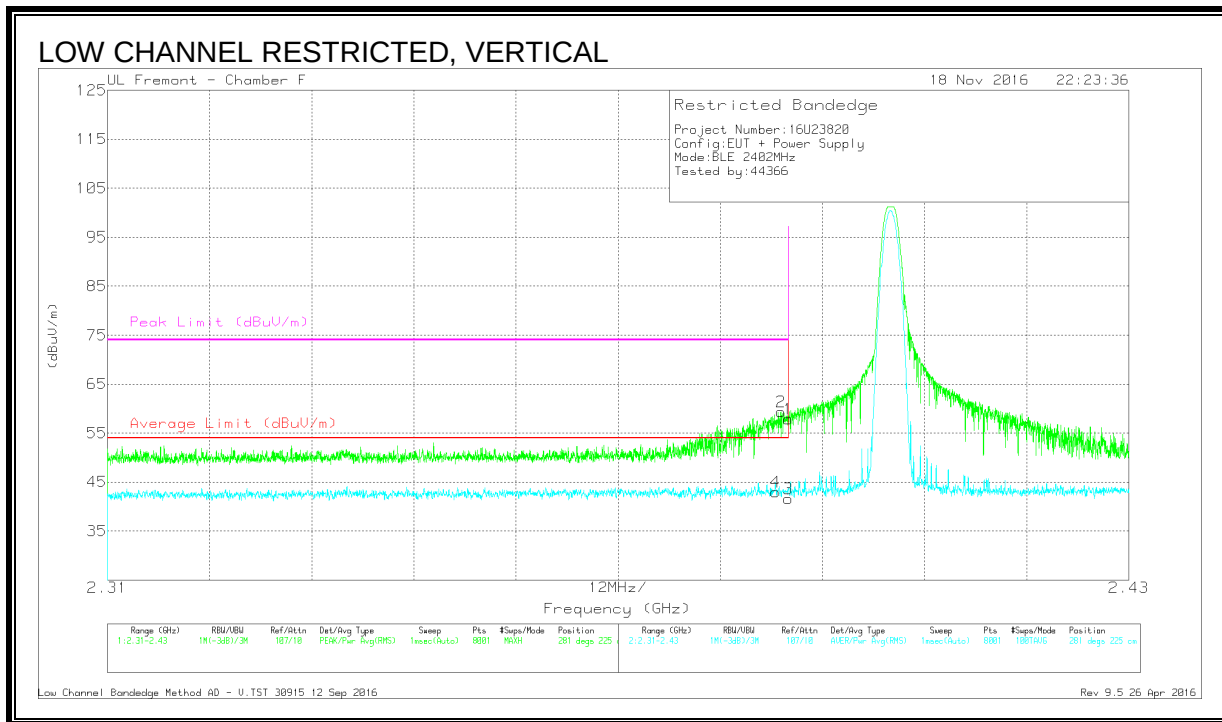


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl /Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	46.67	Pk	32.1	-20.9	0	57.87	-	-	74	-16.13	281	225	V
2	* 2.389	48.1	Pk	32.1	-20.9	0	59.3	-	-	74	-14.7	281	225	V
3	* 2.39	30.35	RMS	32.1	-20.9	2.03	43.58	54	-10.42	-	-	281	225	V
4	* 2.388	31.71	RMS	32.1	-20.9	2.03	44.94	54	-9.06	-	-	281	225	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

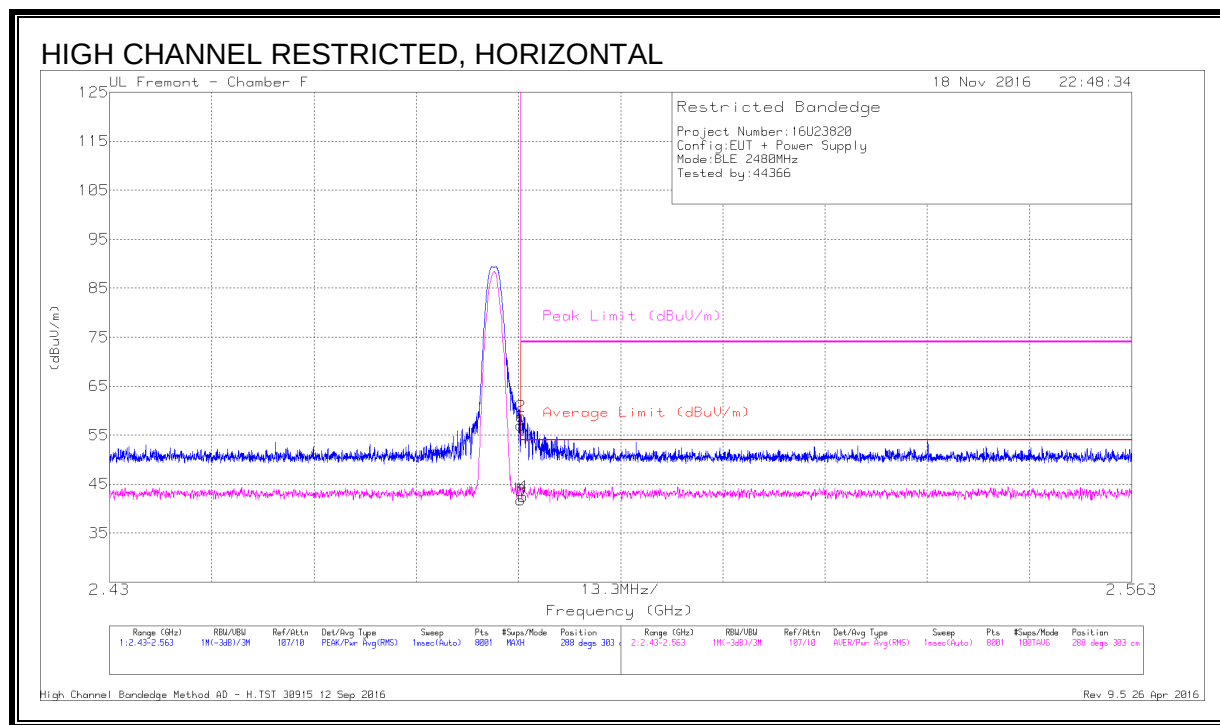


DATA

Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	AF T344 (dB/m)	Amp/Cbl/Filtr/ Pad (dB)	DC Corr (dB)	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	45.66	Pk	32.3	-21	0	56.96	-	-	74	-17.04	288	303	H
2	* 2.484	47.5	Pk	32.3	-21	0	58.8	-	-	74	-15.2	288	303	H
3	* 2.484	30.47	RMS	32.3	-21	2.03	43.8	54	-10.2	-	-	288	303	H
4	* 2.484	31.19	RMS	32.3	-21	2.03	44.52	54	-9.48	-	-	288	303	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

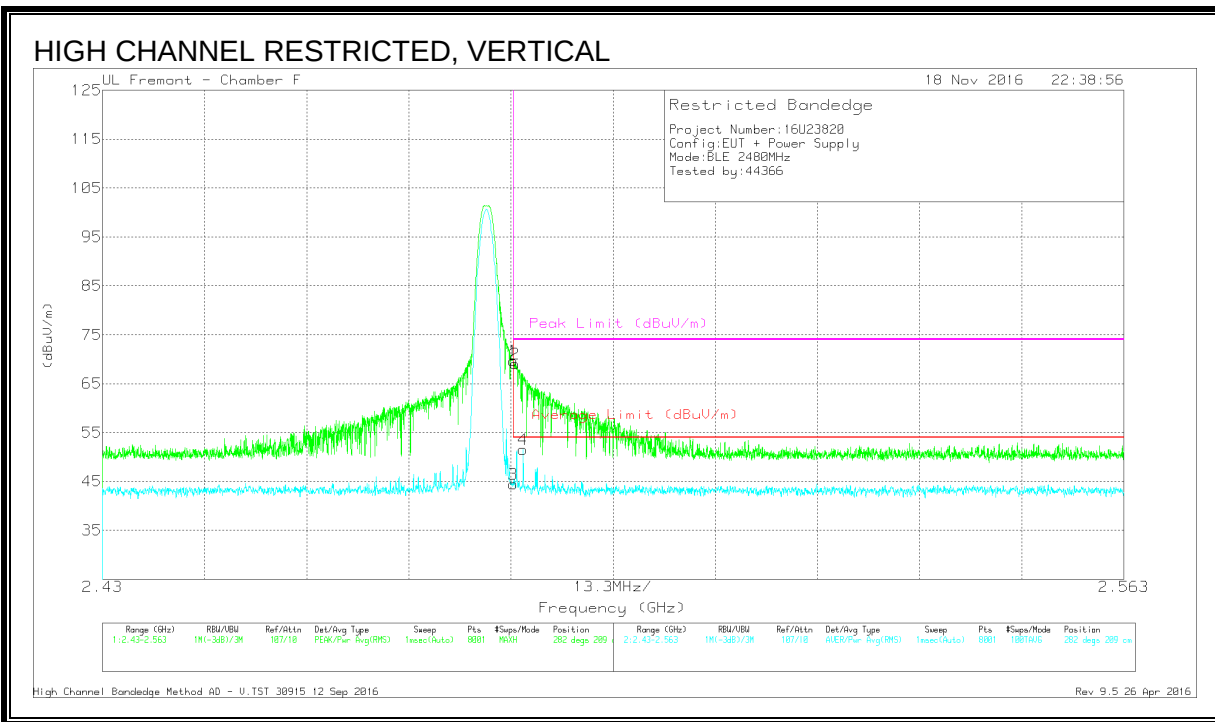

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT344 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	58.31	Pk	32.3	-21	0	69.61	-	-	74	-4.39	282	209	V
2	* 2.484	57.72	Pk	32.3	-21	0	69.02	-	-	74	-4.98	282	209	V
3	* 2.484	31.17	RMS	32.3	-21	2.03	44.5	54	-9.5	-	-	282	209	V
4	* 2.485	38.05	RMS	32.3	-20.9	2.03	51.48	54	-2.52	-	-	282	209	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

8.2.2. HARMONICS AND SPURIOUS EMISSIONS

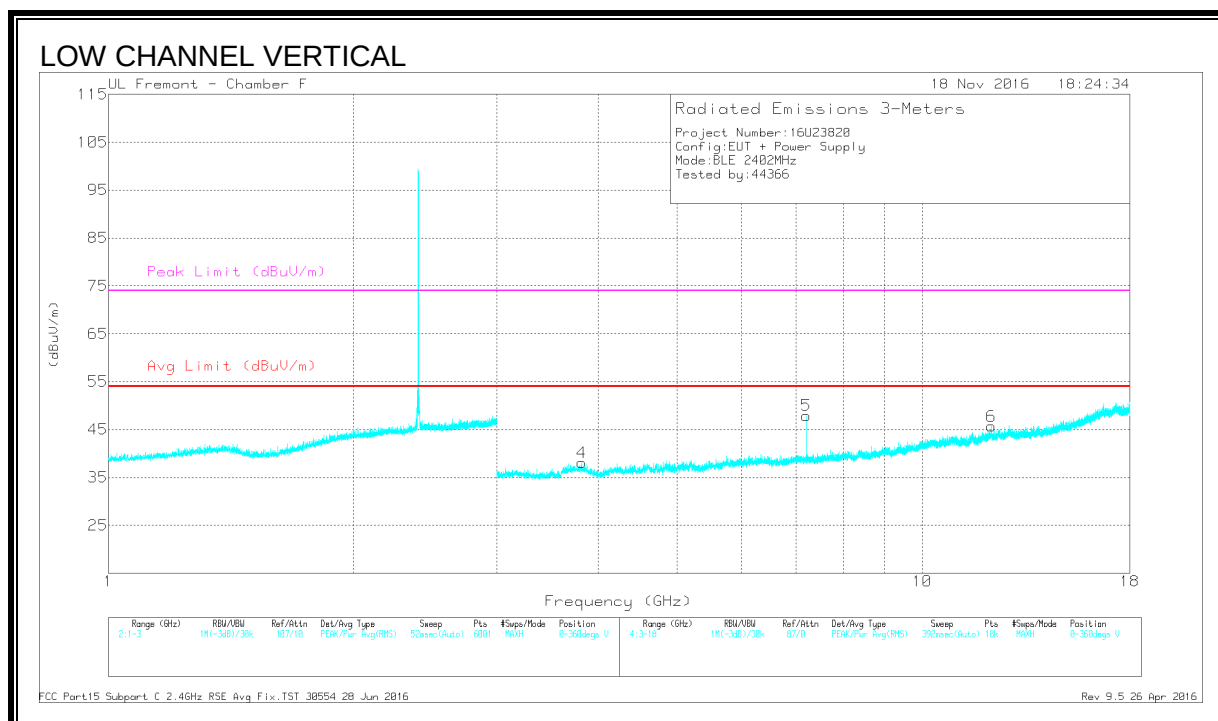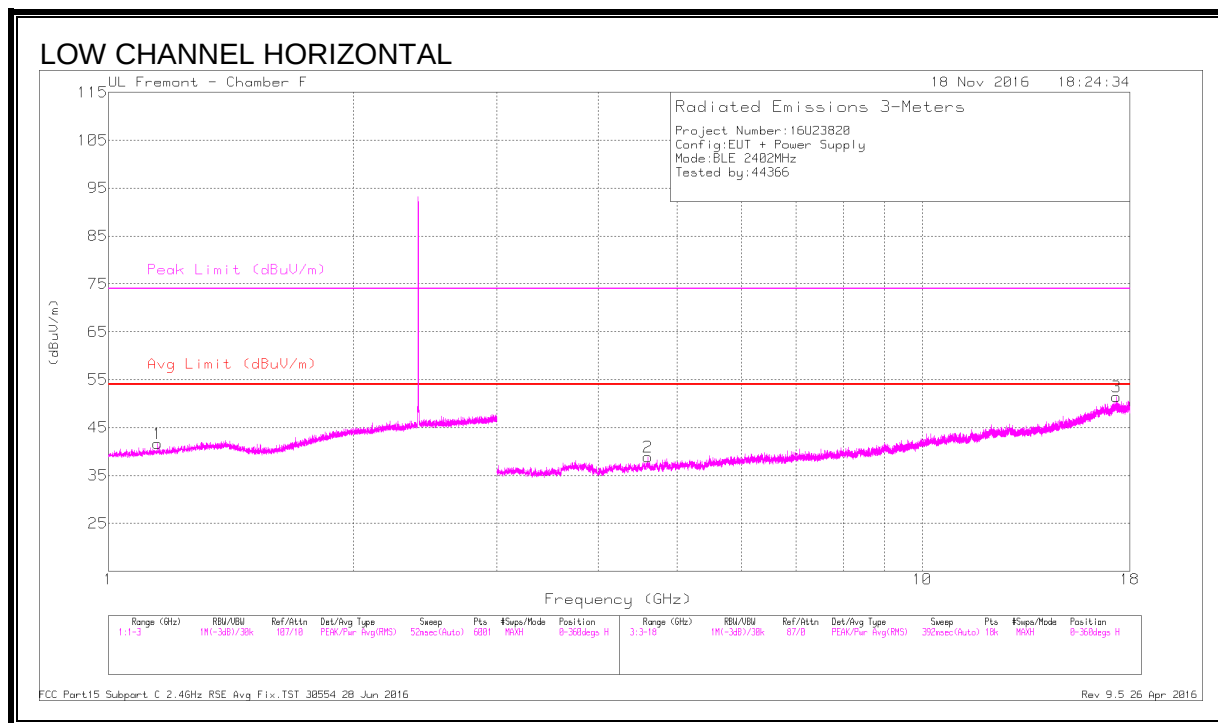



DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cb/Filt/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.148	42.06	PK2	28.1	-22.6	0	47.56	-	-	74	-26.44	245	216	H
	* 1.149	30.84	MAv1	28.1	-22.6	2.03	38.37	54	-15.63	-	-	245	216	H
2	* 4.606	37.96	PK2	34.1	-27.8	0	44.26	-	-	74	-29.74	67	265	H
	* 4.605	27.18	MAv1	34.1	-27.8	2.03	35.51	54	-18.49	-	-	67	265	H
3	17.325	33.82	PK2	41.2	-18.8	0	56.22	-	-	-	-	135	171	H
4	* 3.817	38.65	PK2	33.4	-28.5	0	43.55	-	-	74	-30.45	246	283	V
	* 3.814	27.43	MAv1	33.4	-28.5	2.03	34.36	54	-19.64	-	-	246	283	V
5	7.206	42.55	PK2	35.6	-26.4	0	51.75	-	-	-	-	266	102	V
6	* 12.16	33.65	PK2	38.9	-21.4	0	51.15	-	-	74	-22.85	7	390	V
	* 12.163	23.51	MAv1	38.9	-21.4	2.03	43.04	54	-10.96	-	-	7	390	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

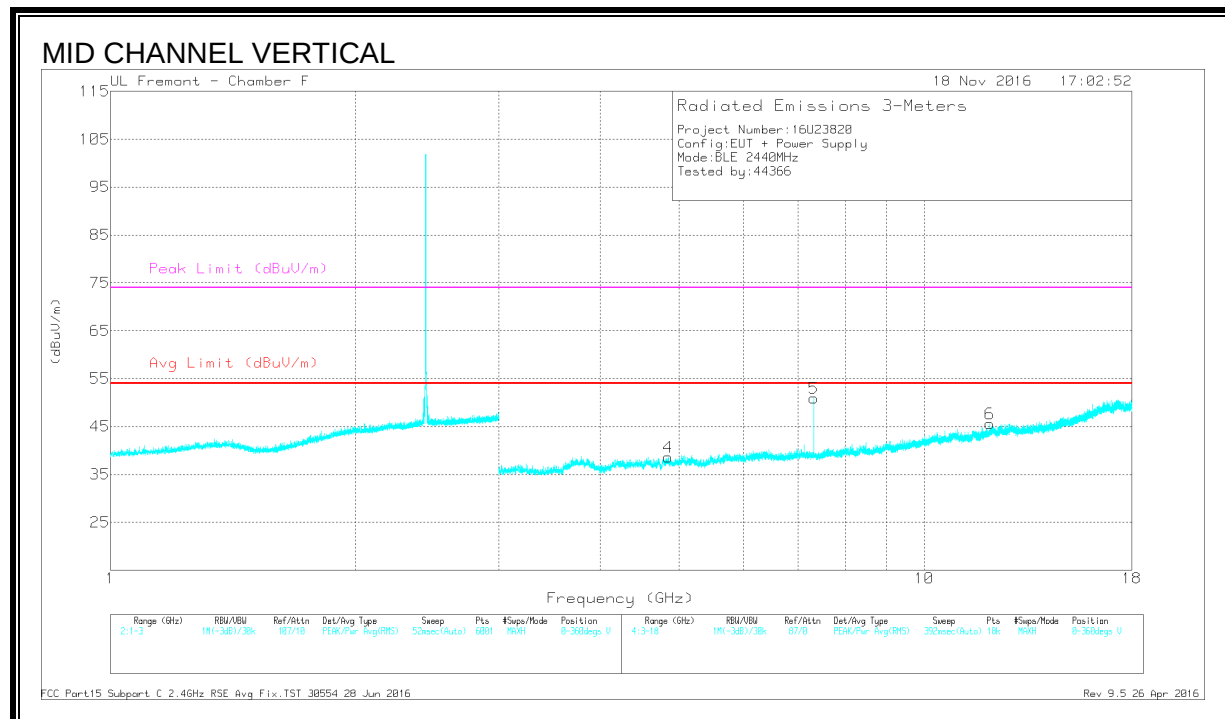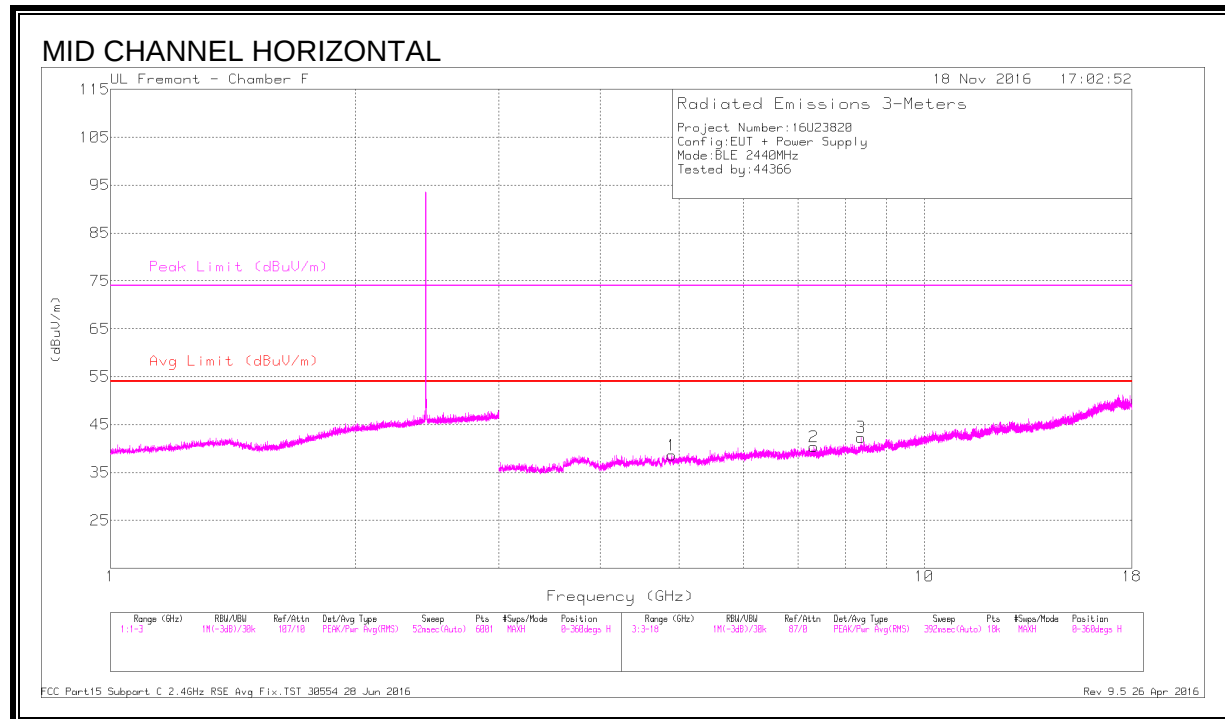



DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.896	37.94	PK2	34.1	-28	0	44.04	-	-	74	-29.96	30	304	H
	* 4.898	27.02	MAv1	34.1	-28	2.03	35.15	54	-18.85	-	-	30	304	H
2	* 7.319	38.51	PK2	35.5	-26.5	0	47.51	-	-	74	-26.49	158	214	H
	* 7.319	28.29	MAv1	35.5	-26.5	2.03	39.32	54	-14.68	-	-	158	214	H
3	* 8.365	35.93	PK2	35.7	-23.9	0	47.73	-	-	74	-26.27	282	124	H
	* 8.366	24.49	MAv1	35.7	-23.9	2.03	38.32	54	-15.68	-	-	282	124	H
4	* 4.843	37.32	PK2	34	-27.1	0	44.22	-	-	74	-29.78	6	354	V
	* 4.844	25.96	MAv1	34	-27.1	2.03	34.89	54	-19.11	-	-	6	354	V
5	* 7.321	44.9	PK2	35.6	-26.5	0	54	-	-	74	-20	268	114	V
	* 7.32	37.54	MAv1	35.5	-26.5	2.03	48.57	54	-5.43	-	-	268	114	V
6	* 12.038	34.42	PK2	38.8	-22.5	0	50.72	-	-	74	-23.28	141	355	V
	* 12.038	24.18	MAv1	38.8	-22.5	2.03	42.51	54	-11.49	-	-	141	355	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

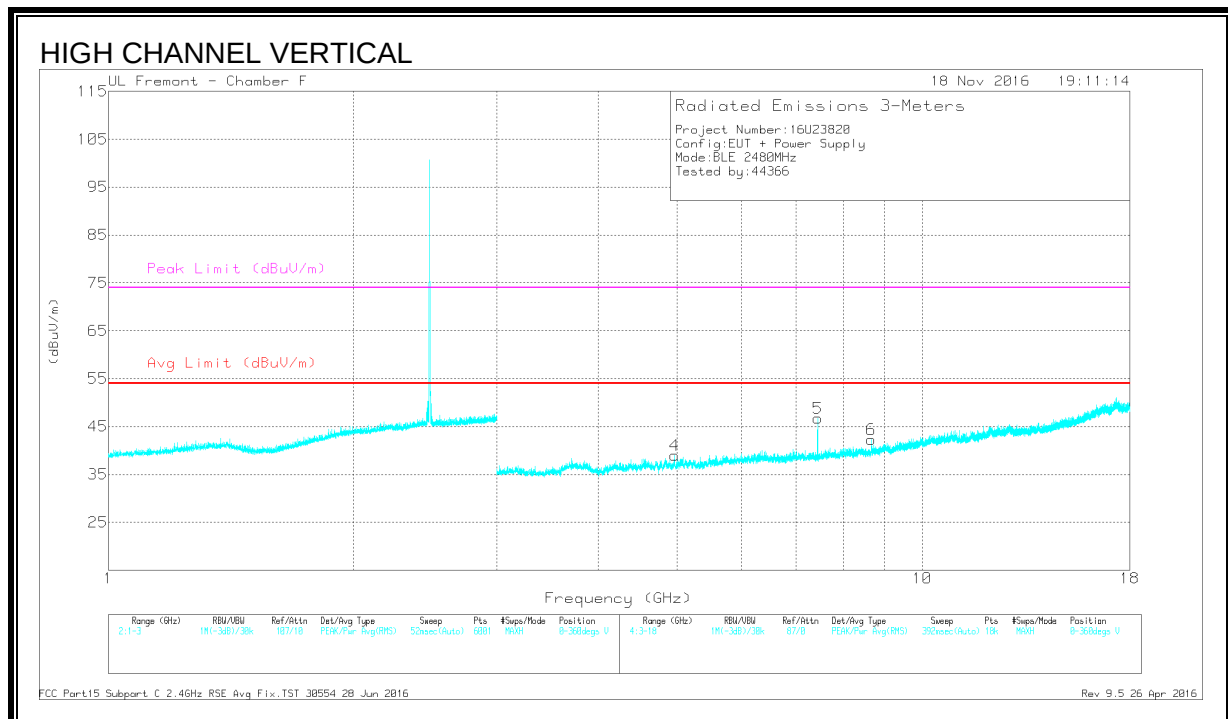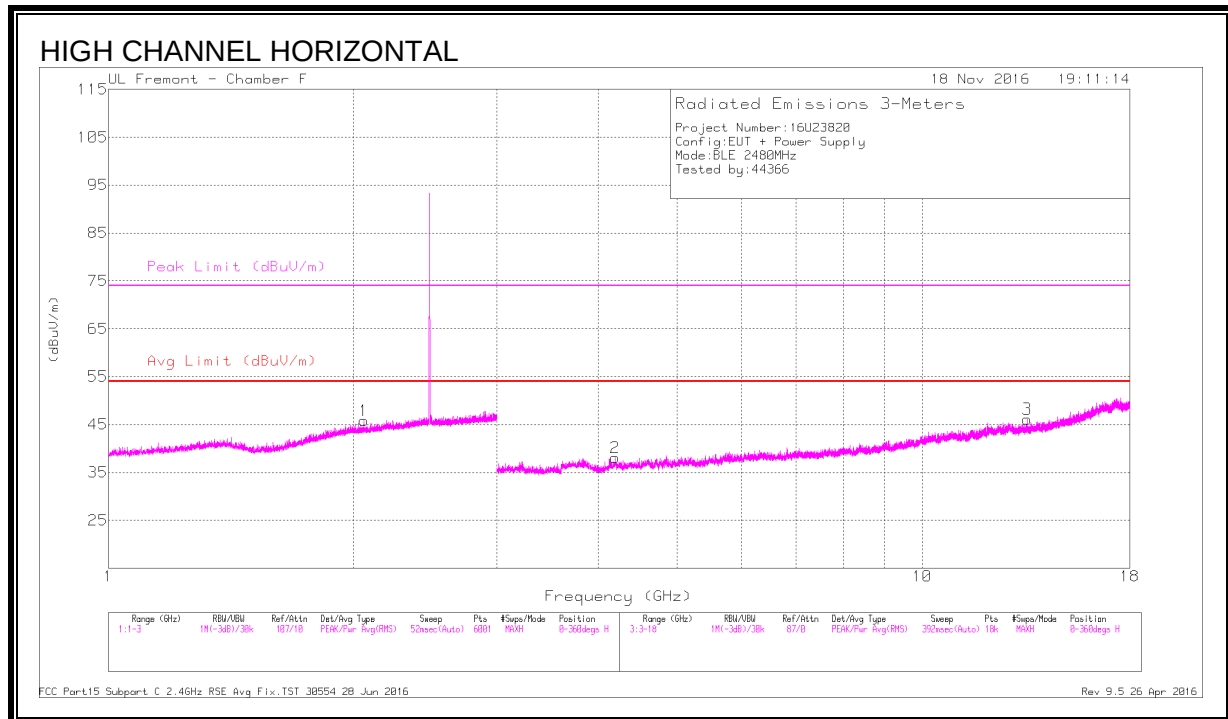

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cb/Fitr/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.061	41.3	PK2	31.5	-21.4	0	51.4	-	-	-	-	186	189	H
2	* 4.193	37.6	PK2	33.7	-28.1	0	43.2	-	-	74	-30.8	88	226	H
	* 4.192	27.24	MAv1	33.7	-28.1	2.03	34.87	54	-19.13	-	-	88	226	H
3	13.457	35	PK2	39	-23.2	0	50.8	-	-	-	-	154	251	H
4	* 4.96	38.55	PK2	34.2	-28.5	0	44.25	-	-	74	-29.75	164	103	V
	* 4.96	28.75	MAv1	34.2	-28.5	2.03	36.48	54	-17.52	-	-	164	103	V
5	* 7.439	41.79	PK2	35.6	-25.8	0	51.59	-	-	74	-22.41	275	123	V
	* 7.44	33.41	MAv1	35.6	-25.8	2.03	45.24	54	-8.76	-	-	275	123	V
6	8.656	34.6	PK2	35.8	-23.5	0	46.9	-	-	-	-	86	220	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

8.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

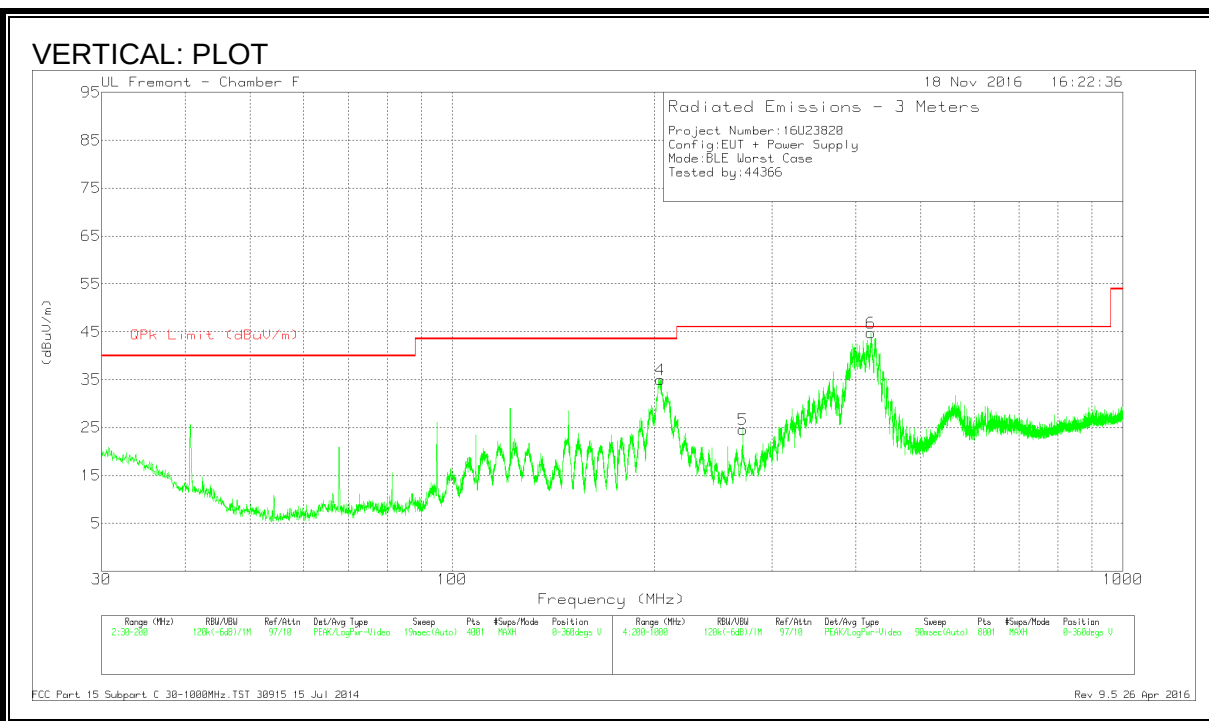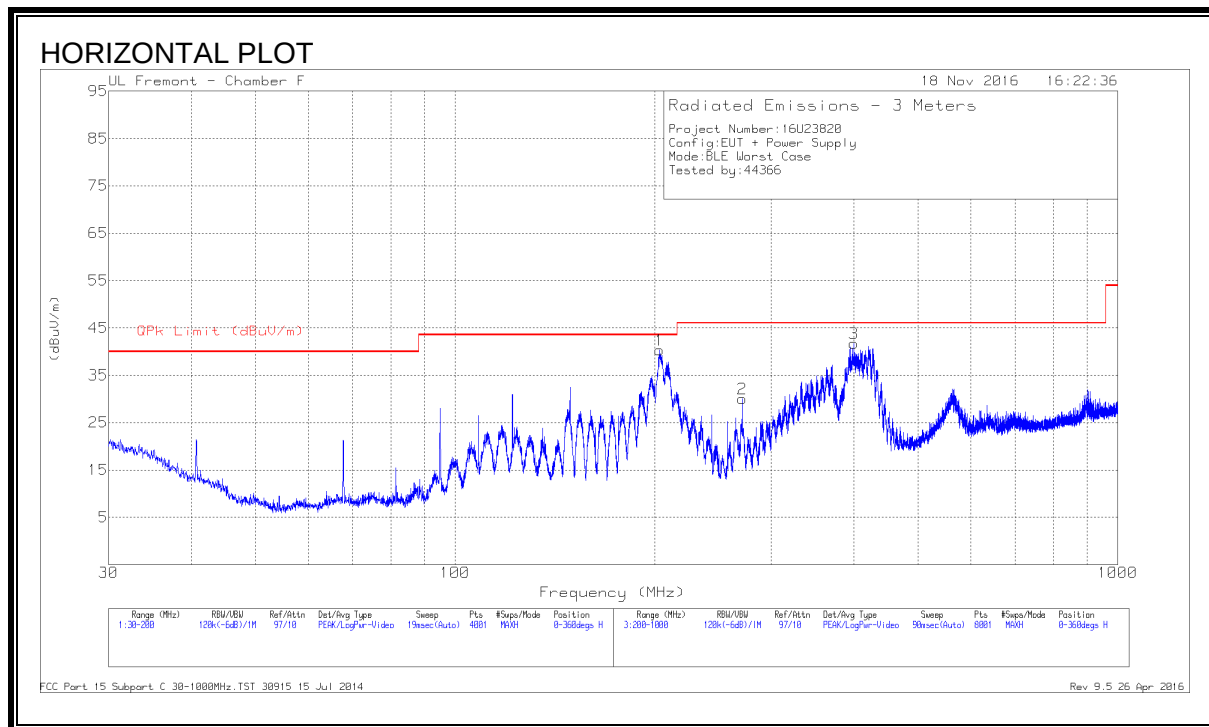

DATA



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T185 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	204.084	52.1	Qp	15.6	-30.4	37.3	43.52	-6.22	106	148	H
2	* 271.2	43	Pk	17.1	-30.1	30	46.02	-16.02	0-360	99	H
3	399.024	46.43	Qp	19.5	-29.4	36.53	46.02	-9.49	81	106	H
4	204.2	49.82	Pk	15.6	-30.4	35.02	43.52	-8.5	0-360	201	V
5	* 271.2	37.63	Pk	17.1	-30.1	24.63	46.02	-21.39	0-360	100	V
6	421.2	51.17	Qp	20.3	-29.4	42.07	46.02	-3.95	23	122	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

8.4. WORST-CASE 18 to 26 GHz

SPURIOUS EMISSIONS 18 to 26 GHz (WORST-CASE CONFIGURATION)

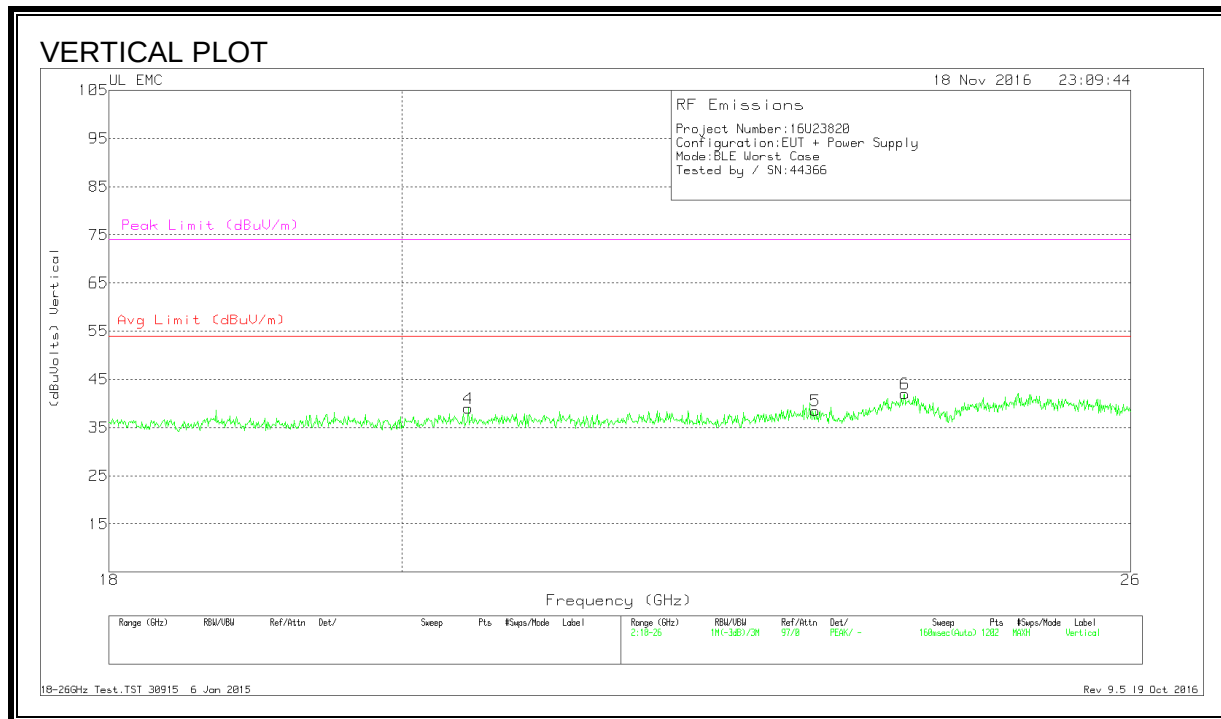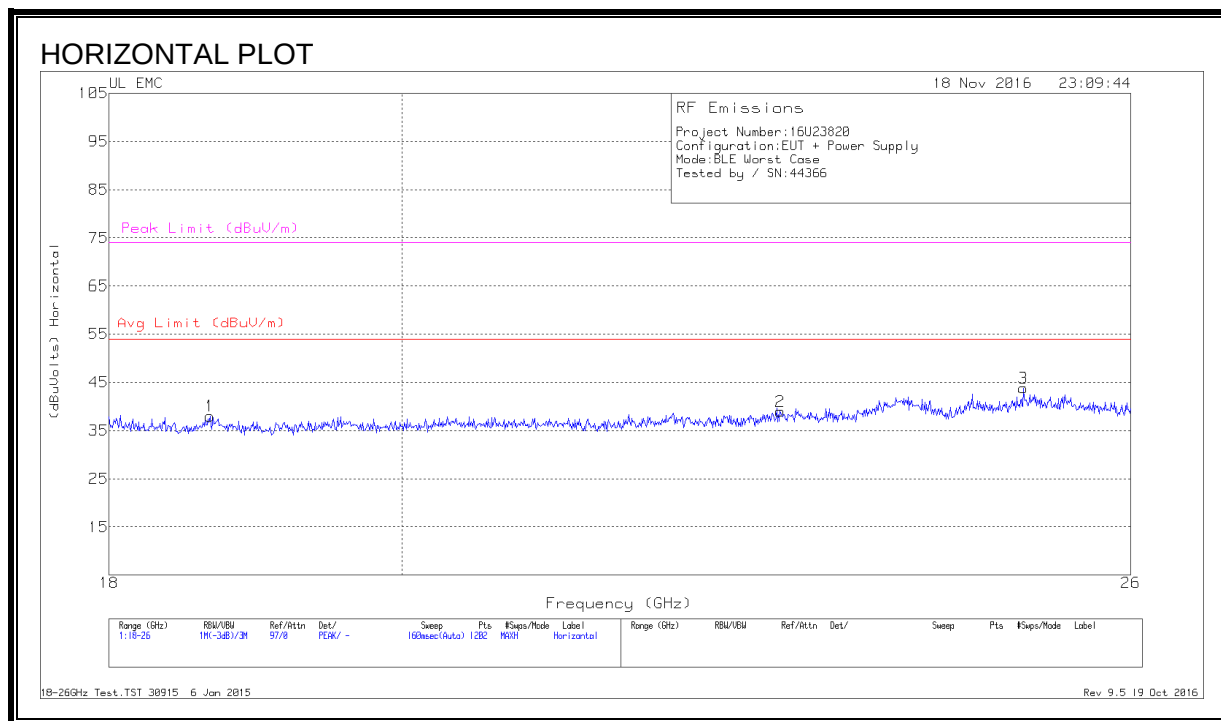

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T449 (dB/m)	Amp/Cbl (dB)	Dist Corr (dB)	Corrected Reading (dBuVolts)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)
1	18.666	39.8	Pk	32.5	-24.8	-9.5	38	54	-16	74	-36
2	22.916	40.3	Pk	33.4	-25.2	-9.5	39	54	-15	74	-35
3	25.014	43.63	Pk	34.2	-24.5	-9.5	43.83	54	-10.17	74	-30.17
4	20.485	40.9	Pk	32.9	-25.3	-9.5	39	54	-15	74	-35
5	23.209	39.5	Pk	33.5	-25	-9.5	38.5	54	-15.5	74	-35.5
6	23.968	41.7	Pk	34	-24.2	-9.5	42	54	-12	74	-32

Pk - Peak detector

9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS

DATA

Range 1: Line-L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L1	LC Cables 1&3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
1	8.7495	12.55	Qp	0	.1	10.2	22.85	60	-37.15	-	-
2	8.7495	11.44	Ca	0	.1	10.2	21.74	-	-	50	-28.26
3	11.24925	17.08	Qp	0	.2	10.2	27.48	60	-32.52	-	-
4	11.24925	16.18	Ca	0	.2	10.2	26.58	-	-	50	-23.42
5	13.75125	14.95	Qp	.1	.2	10.2	25.45	60	-34.55	-	-
6	13.749	11.51	Ca	.1	.2	10.2	22.01	-	-	50	-27.99
7	24.05175	14.23	Qp	.1	.2	10.5	25.03	60	-34.97	-	-
8	23.75025	7.2	Ca	.1	.2	10.4	17.9	-	-	50	-32.1
9	26.25	12.16	Qp	.1	.3	10.5	23.06	60	-36.94	-	-
10	26.25	11.95	Ca	.1	.3	10.5	22.85	-	-	50	-27.15
11	27.69225	15.78	Qp	.1	.3	10.5	26.68	60	-33.32	-	-
12	27.69225	14.97	Ca	.1	.3	10.5	25.87	-	-	50	-24.13

Range 2: Line-L2 .15 - 30MHz


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L2	LC Cables 2&3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
13	8.1915	10.86	Qp	0	.1	10.2	21.16	60	-38.84	-	-
14	7.92375	.35	Ca	0	.1	10.2	10.65	-	-	50	-39.35
15	11.24925	17.5	Qp	0	.2	10.2	27.9	60	-32.1	-	-
16	11.24925	16.51	Ca	0	.2	10.2	26.91	-	-	50	-23.09
17	13.749	15.77	Qp	.1	.2	10.2	26.27	60	-33.73	-	-
18	13.749	12.49	Ca	.1	.2	10.2	22.99	-	-	50	-27.01
19	24.01125	15.38	Qp	.1	.2	10.5	26.18	60	-33.82	-	-
20	24.01575	5.56	Ca	.1	.2	10.5	16.36	-	-	50	-33.64
21	26.25	16.51	Qp	.1	.3	10.5	27.41	60	-32.59	-	-
22	26.25	16.52	Ca	.1	.3	10.5	27.42	-	-	50	-22.58
23	28.74975	18.92	Qp	.1	.3	10.4	29.72	60	-30.28	-	-
24	28.74975	18.76	Ca	.1	.3	10.4	29.56	-	-	50	-20.44

Qp - Quasi-Peak detector

Ca - CISPR average detection

FCC15 CE Class B 150kHz-30MHz Stepping.TST 30915 24 Feb 2016

LINE 1 RESULTS

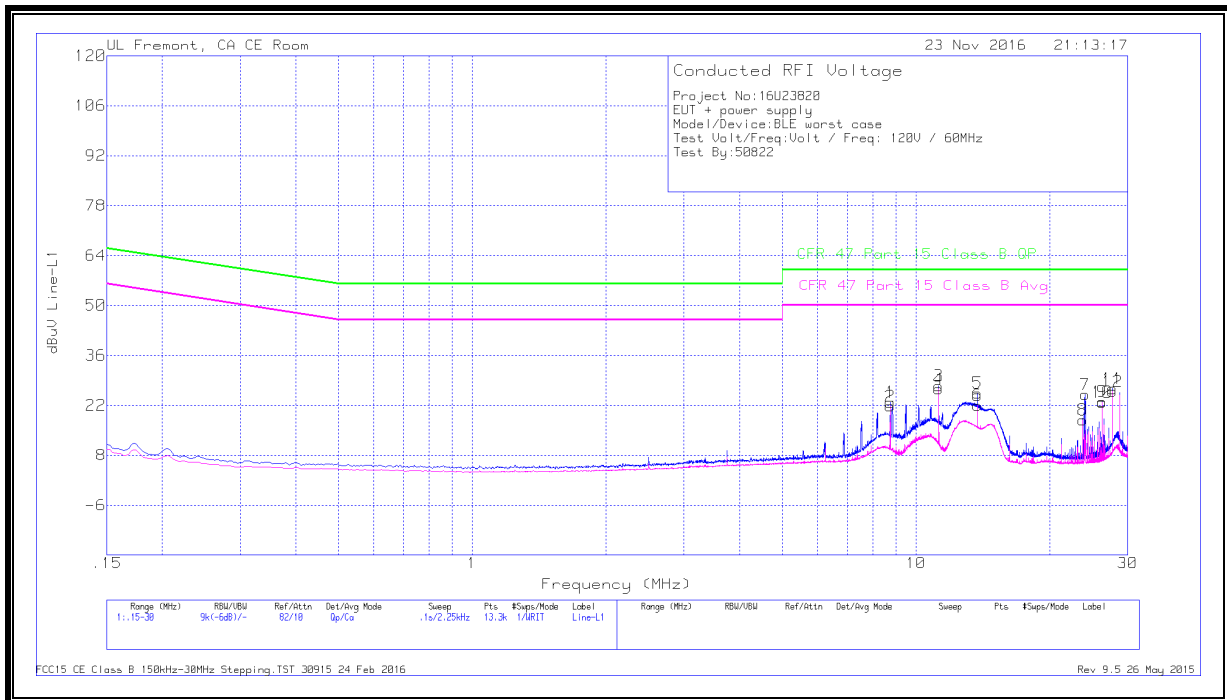

LINE 2 RESULTS

