


Worst Case Mode:
Worst Case Transfer Rate:
RU Index:
Distance of Measurements:
Operating Frequency:
Channel:


802.11ax OFDMA
MCS0
61
3 Meters
2462MHz
11

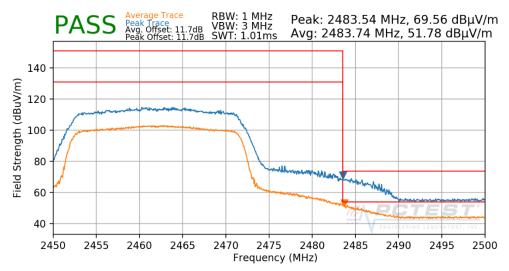

Plot 7-153. Radiated Restricted Upper Band Edge Measurement SISO CORE 0 (Average – RU242)

Worst Case Mode:
Worst Case Transfer Rate:
RU Index:
Distance of Measurements:
Operating Frequency:
Channel:

802.11ax OFDMA
MCS0
61
3 Meters
2467MHz
12

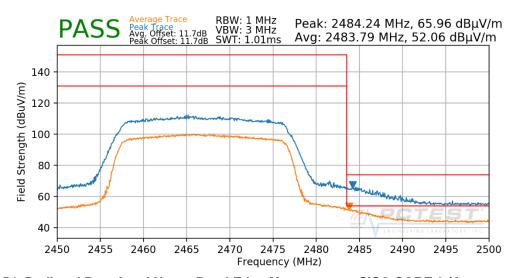

Plot 7-154. Radiated Restricted Upper Band Edge Measurement SISO CORE 0 (Average – RU242)

FCC ID: BCGA2069	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogg 110 of 120
1C1912170054-07.BCG	12/10/2019 - 02/24/2020	Tablet Device	Page 118 of 136
© 2020 DCTECT			V 0 E 12/16/2010



7.7.5 SISO Core 1 Radiated Restricted Band Edge Measurements §15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:

Worst Case Transfer Rate:

RU Index:

Distance of Measurements:

Operating Frequency:

Channel:


802.11ax OFDMA

MCS0

0

3 Meters

2412MHz

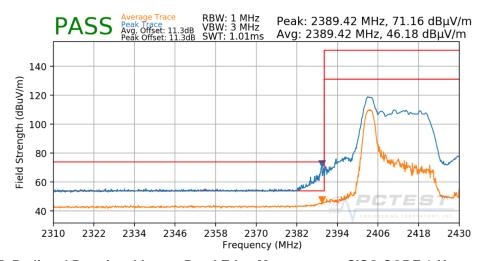

Plot 7-155. Radiated Restricted Lower Band Edge Measurement SISO CORE 1 (Average – RU26)

Worst Case Mode:

Worst Case Transfer Rate:

RU Index:

Distance of Measurements:

Operating Frequency:


Channel:

802.11ax OFDMA

MCS0

3 Meters

2417MHz

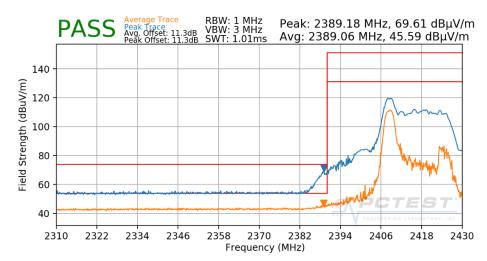


Plot 7-156. Radiated Restricted Lower Band Edge Measurement SISO CORE 1 (Average – RU26)

FCC ID: BCGA2069	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dags 440 of 426
1C1912170054-07.BCG	12/10/2019 - 02/24/2020	Tablet Device	Page 119 of 136
@ 2020 PCTEST			V 9 5 12/16/2019



Worst Case Mode:
Worst Case Transfer Rate:
RU Index:
Distance of Measurements:
Operating Frequency:
Channel:

802.11ax OFDMA
MCS0
8
3 Meters
2452MHz
9

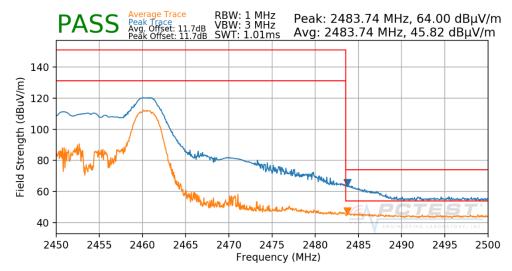


Plot 7-157. Radiated Restricted Upper Band Edge Measurement SISO CORE 1 (Average - RU26)

Worst Case Mode:
Worst Case Transfer Rate:
RU Index:
Distance of Measurements:
Operating Frequency:
Channel:

802.11ax OFDMA
MCS0

8
3 Meters
2457MHz
10

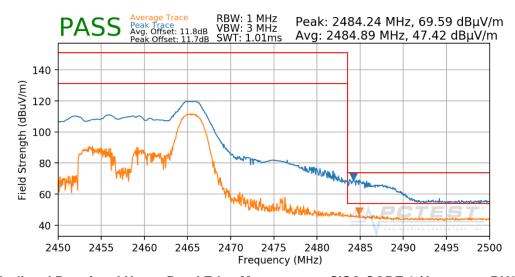


Plot 7-158. Radiated Restricted Upper Band Edge Measurement SISO CORE 1 (Average - RU26)

FCC ID: BCGA2069	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dags 120 of 120
1C1912170054-07.BCG	12/10/2019 - 02/24/2020	Tablet Device	Page 120 of 136
© 2020 PCTEST			V 9.5 12/16/2019



Worst Case Mode:
Worst Case Transfer Rate:
RU Index:
Distance of Measurements:
Operating Frequency:
Channel:

802.11ax OFDMA
MCS0
8
3 Meters
2462MHz
11

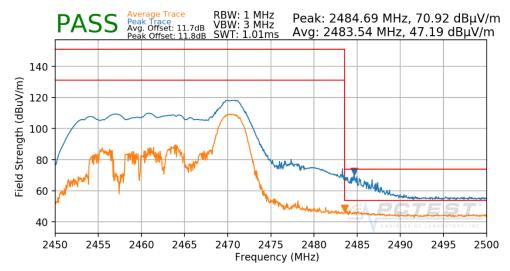

Plot 7-159. Radiated Restricted Upper Band Edge Measurement SISO CORE 1 (Average – RU26)

Worst Case Mode:

Worst Case Transfer Rate:

RU Index:

Distance of Measurements:

Operating Frequency:

Channel:

802.11ax OFDMA


MCS0

8

3 Meters

2467MHz

12

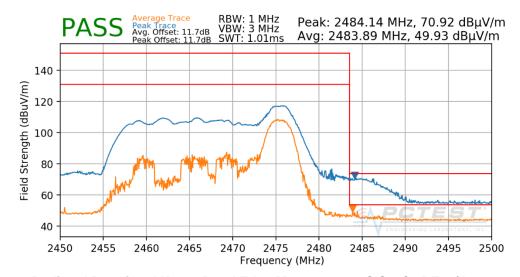


Plot 7-160. Radiated Restricted Upper Band Edge Measurement SISO CORE 1 (Average - RU26)

FCC ID: BCGA2069	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogg 424 of 426
1C1912170054-07.BCG	12/10/2019 - 02/24/2020	Tablet Device	Page 121 of 136
@ 2020 DCTEST			V 0 E 12/16/2010



Worst Case Mode:
Worst Case Transfer Rate:
RU Index:
Distance of Measurements:
Operating Frequency:
Channel:


802.11ax OFDMA
MCS0
61
3 Meters
2412MHz

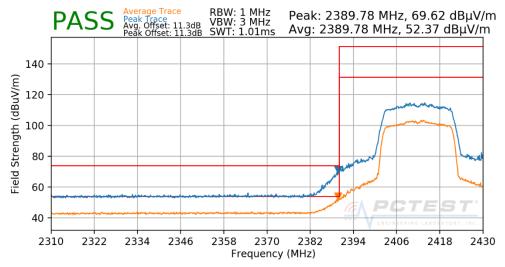

Plot 7-161. Radiated Restricted Lower Band Edge Measurement SISO CORE 1 (Average - RU242)

Worst Case Mode:
Worst Case Transfer Rate:
RU Index:
Distance of Measurements:
Operating Frequency:
Channel:

802.11ax OFDMA
MCS0
61
3 Meters
2417MHz

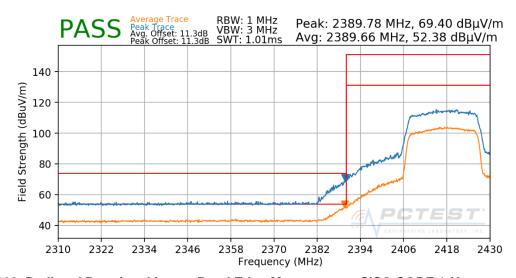


Plot 7-162. Radiated Restricted Lower Band Edge Measurement SISO CORE 1 (Average – RU242)

FCC ID: BCGA2069	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogg 122 of 126
1C1912170054-07.BCG	12/10/2019 - 02/24/2020	Tablet Device	Page 122 of 136
© 2020 PCTEST			V 9 5 12/16/2019



Worst Case Mode:
Worst Case Transfer Rate:
RU Index:
Distance of Measurements:
Operating Frequency:
Channel:


802.11ax OFDMA
MCS0
61
3 Meters
2452MHz

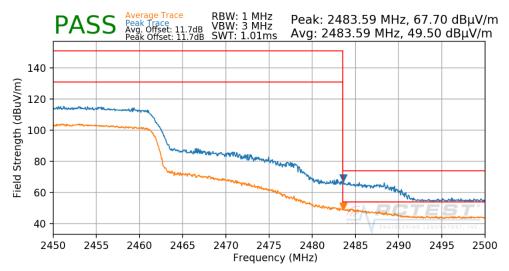

Plot 7-163. Radiated Restricted Upper Band Edge Measurement SISO CORE 1 (Average – RU242)

Worst Case Mode:
Worst Case Transfer Rate:
RU Index:
Distance of Measurements:
Operating Frequency:
Channel:

802.11ax OFDMA
MCS0
61
3 Meters
2457MHz
10

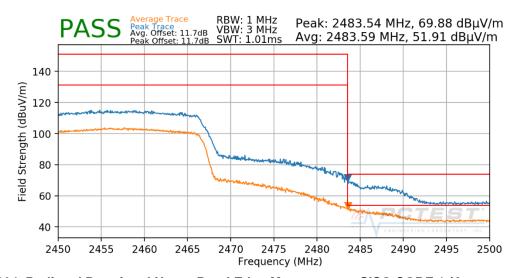


Plot 7-164. Radiated Restricted Upper Band Edge Measurement SISO CORE 1 (Average – RU242)

FCC ID: BCGA2069	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogg 122 of 126
1C1912170054-07.BCG	12/10/2019 - 02/24/2020	Tablet Device	Page 123 of 136
© 2020 PCTEST			V 9.5 12/16/2019



Worst Case Mode:
Worst Case Transfer Rate:
RU Index:
Distance of Measurements:
Operating Frequency:
Channel:


802.11ax OFDMA
MCS0
61
3 Meters
2462MHz
11

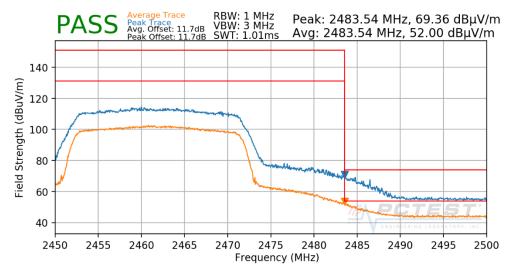

Plot 7-165. Radiated Restricted Upper Band Edge Measurement SISO CORE 1 (Average – RU242)

Worst Case Mode:
Worst Case Transfer Rate:
RU Index:
Distance of Measurements:
Operating Frequency:
Channel:

802.11ax OFDMA
MCS0
61
3 Meters
2467MHz
12

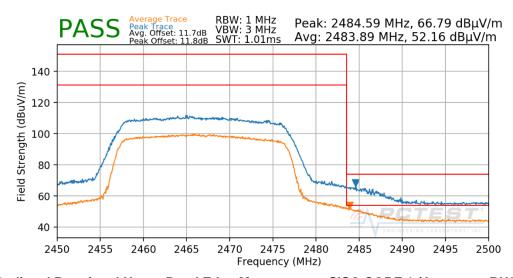

Plot 7-166. Radiated Restricted Upper Band Edge Measurement SISO CORE 1 (Average – RU242)

FCC ID: BCGA2069	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogg 424 of 426
1C1912170054-07.BCG	12/10/2019 - 02/24/2020	Tablet Device	Page 124 of 136
© 2020 PCTEST			V 9.5 12/16/2019



7.7.6 CDD Radiated Restricted Band Edge Measurements §15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:

Worst Case Transfer Rate:

RU Index:

Distance of Measurements:

Operating Frequency:

Channel:


802.11ax OFDMA

MCS0

0

3 Meters

2412MHz

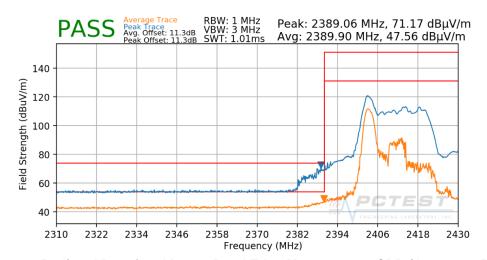

Plot 7-167. Radiated Restricted Lower Band Edge Measurement CDD (Average – RU26)

Worst Case Mode:

Worst Case Transfer Rate:

RU Index:

Distance of Measurements:

Operating Frequency:

Channel:


802.11ax OFDMA

MCS0

3 Meters

2417MHz

2

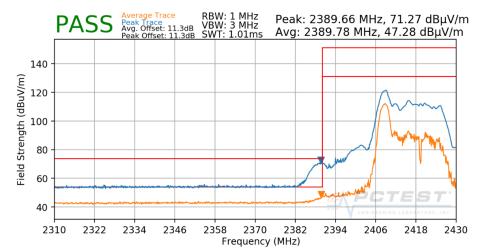

Plot 7-168. Radiated Restricted Lower Band Edge Measurement CDD (Average - RU26)


FCC ID: BCGA2069	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogg 105 of 106
1C1912170054-07.BCG	12/10/2019 - 02/24/2020	Tablet Device	Page 125 of 136
© 2020 PCTEST			V 0.5.12/16/2010



Worst Case Mode:
Worst Case Transfer Rate:
RU Index:
Distance of Measurements:
Operating Frequency:

802.11ax OFDMA
MCS0
8
3 Meters
2457MHz


Channel: 9

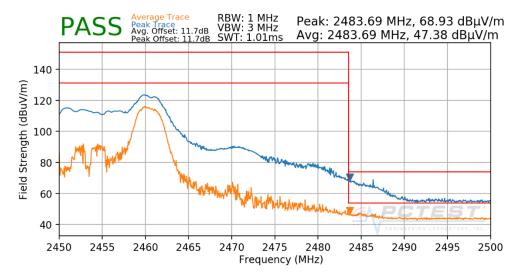

Plot 7-169. Radiated Restricted Upper Band Edge Measurement CDD (Average – RU26)

Worst Case Mode:
Worst Case Transfer Rate:
RU Index:
Distance of Measurements:
Operating Frequency:
Channel:

802.11ax OFDMA
MCS0
8
3 Meters
2457MHz
10

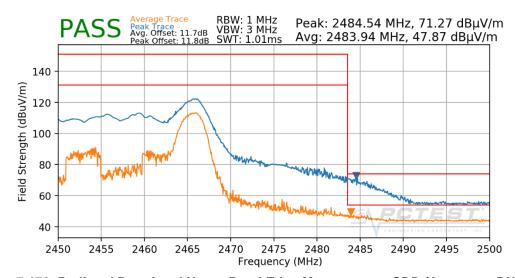

Plot 7-170. Radiated Restricted Upper Band Edge Measurement CDD (Average – RU26)

FCC ID: BCGA2069	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogg 400 of 400
1C1912170054-07.BCG	12/10/2019 - 02/24/2020	Tablet Device	Page 126 of 136
© 2020 PCTEST	•	•	V 9.5 12/16/2019



Worst Case Mode:

Worst Case Transfer Rate:

RU Index:

Distance of Measurements:

Operating Frequency:

Channel:


802.11ax OFDMA

MCS0

8
3 Meters

2462MHz

11

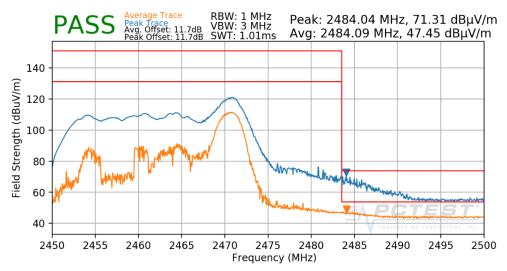


Plot 7-171. Radiated Restricted Upper Band Edge Measurement CDD (Average - RU26)

Worst Case Mode:
Worst Case Transfer Rate:
RU Index:
Distance of Measurements:
Operating Frequency:
Channel:

802.11ax OFDMA
MCS0

8
3 Meters
2467MHz
12

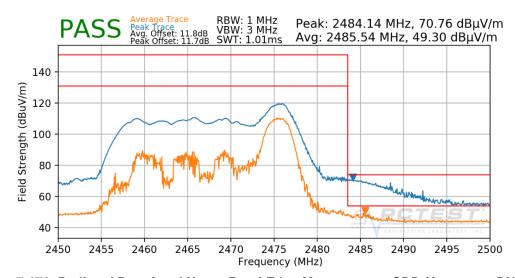


Plot 7-172. Radiated Restricted Upper Band Edge Measurement CDD (Average – RU26)

FCC ID: BCGA2069	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogg 407 of 406
1C1912170054-07.BCG	12/10/2019 - 02/24/2020	Tablet Device	Page 127 of 136
© 2020 PCTEST	•	•	V 9.5 12/16/2019



Worst Case Mode:
Worst Case Transfer Rate:
RU Index:
Distance of Measurements:
Operating Frequency:
Channel:


802.11ax OFDMA
MCS0
61
3 Meters
2412MHz

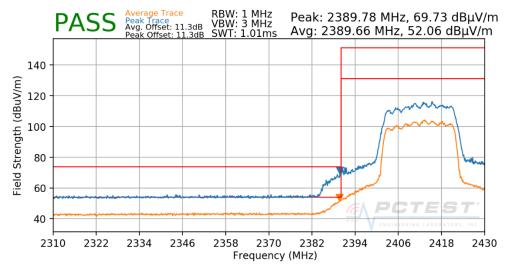

Plot 7-173. Radiated Restricted Lower Band Edge Measurement CDD (Average – RU242)

Worst Case Mode:
Worst Case Transfer Rate:
RU Index:
Distance of Measurements:
Operating Frequency:
Channel:

802.11ax OFDMA
MCS0
61
3 Meters
2417MHz

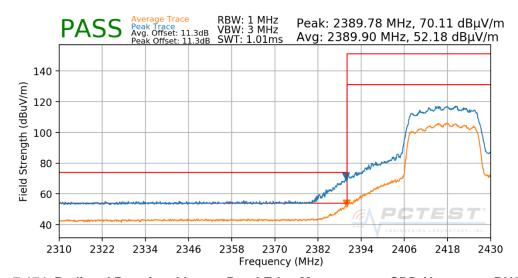

Plot 7-174. Radiated Restricted Lower Band Edge Measurement CDD (Average – RU242)

FCC ID: BCGA2069	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogg 420 of 420
1C1912170054-07.BCG	12/10/2019 - 02/24/2020	Tablet Device	Page 128 of 136
@ 2020 DCTECT			V 0 E 12/16/2010




Channel:

Worst Case Mode:
Worst Case Transfer Rate:
RU Index:
Distance of Measurements:
Operating Frequency:

802.11ax OFDMA
MCS0
61
3 Meters
2457MHz


9

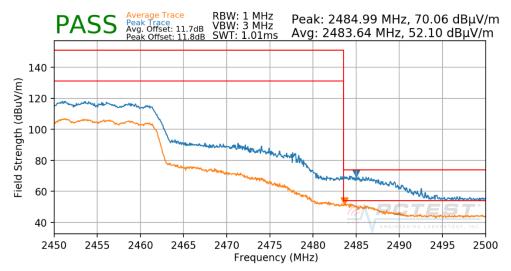

Plot 7-175. Radiated Restricted Upper Band Edge Measurement CDD (Average - RU242)

Worst Case Mode:
Worst Case Transfer Rate:
RU Index:
Distance of Measurements:
Operating Frequency:
Channel:

802.11ax OFDMA
MCS0
61
3 Meters
2457MHz
10

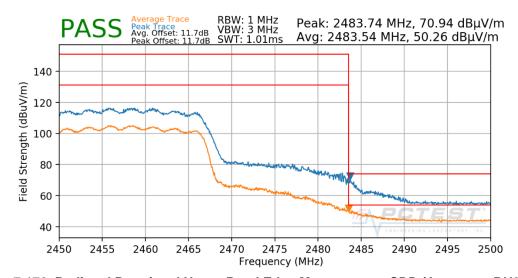

Plot 7-176. Radiated Restricted Upper Band Edge Measurement CDD (Average – RU242)

FCC ID: BCGA2069	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogg 420 of 420
1C1912170054-07.BCG	12/10/2019 - 02/24/2020	Tablet Device	Page 129 of 136
© 2020 PCTEST	•	·	V 9.5 12/16/2019




Channel:

Worst Case Mode:
Worst Case Transfer Rate:
RU Index:
Distance of Measurements:
Operating Frequency:

802.11ax OFDMA
MCS0
61
3 Meters
2462MHz

11

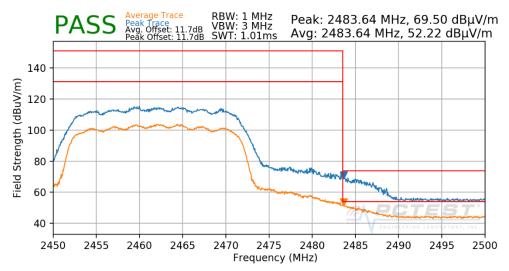

Plot 7-177. Radiated Restricted Upper Band Edge Measurement CDD (Average – RU242)

Worst Case Mode:

Worst Case Transfer Rate:

RU Index:

Distance of Measurements:

Operating Frequency:

Channel:

802.11ax OFDMA


MCS0

61

3 Meters

2467MHz

12

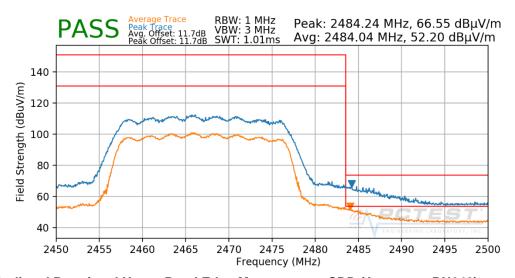

Plot 7-178. Radiated Restricted Upper Band Edge Measurement CDD (Average – RU242)

FCC ID: BCGA2069	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogg 420 of 426
1C1912170054-07.BCG	12/10/2019 - 02/24/2020	Tablet Device	Page 130 of 136
© 2020 PCTEST			V 9.5 12/16/2019



7.8 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-38 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [µV/m]	Measured Distance [Meters]
0.009 - 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-38. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 120kHz (for emissions from 30MHz 1GHz)
- 3. Detector = quasi-peak
- 4. Sweep time = auto couple
- 5. Trace mode = max hold
- 6. Trace was allowed to stabilize

Peak Field Strength Measurements

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 120kHz (for emissions from 30MHz 1GHz)
- 3. Detector = quasi-peak
- 4. Sweep time = auto couple
- 5. Trace mode = max hold
- 6. Trace was allowed to stabilize

FCC ID: BCGA2069	PCTEST	Approved by: Quality Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogg 424 of 426
1C1912170054-07.BCG	12/10/2019 - 02/24/2020	Tablet Device	Page 131 of 136



Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

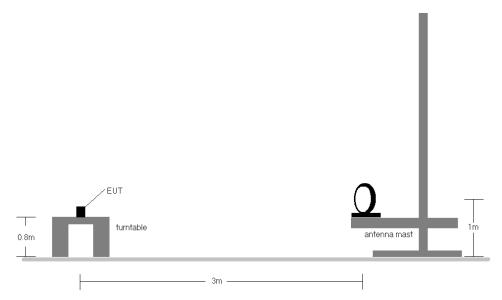


Figure 7-7. Radiated Test Setup < 30Mhz

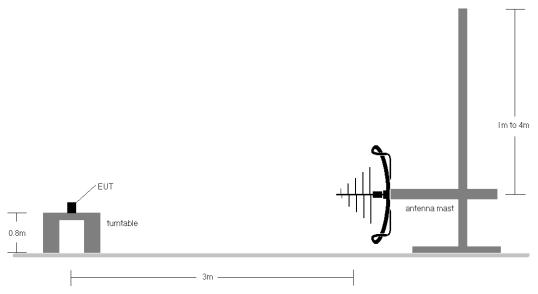


Figure 7-8. Radiated Test Setup < 1GHz

FCC ID: BCGA2069	PCTEST	Approved by: Quality Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogo 122 of 126
1C1912170054-07.BCG	12/10/2019 - 02/24/2020	Tablet Device	Page 132 of 136

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.



Test Notes


- 1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen(8.10) are below the limit shown in Table 7-38.
- 2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
- 3. This unit was tested with its standard battery.
- 4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
- 5. Emissions were measured at a 3 meter test distance.
- 6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
- 7. No spurious emissions were detected within 20dB of the limit below 30MHz.
- 8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
- 9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz 1GHz frequency range, as shown in the subsequent plots.
- 10. All antenna configurations were investigated and only the worst case is reported.
- 11. For radiated measurements, emissions were investigated for the fully-loaded RU configuration and for all the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.

FCC ID: BCGA2069	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 133 of 136
1C1912170054-07.BCG	12/10/2019 - 02/24/2020	Tablet Device	rage 133 UI 130
O COOC BOTEOT			1/0 = 40/40/0040




CDD Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

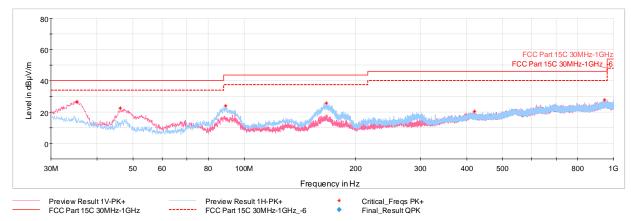

Plot 7-179. Radiated Spurious Plot below 1GHz CDD Ch.6 (RU26), with AC/DC Adapter

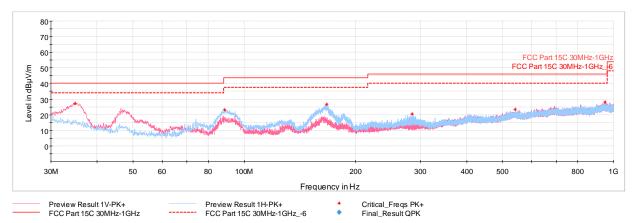

Plot 7-180. Radiated Spurious Plot below 1GHz CDD Ch.6 (RU242), with AC/DC Adapter

FCC ID: BCGA2069	PCTEST	Approved by: Quality Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogo 124 of 126
1C1912170054-07.BCG	12/10/2019 - 02/24/2020	Tablet Device	Page 134 of 136



Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
35.24	Max Peak	V	100	292	-65.62	-14.77	26.61	40.00	-13.39
46.20	Max Peak	V	100	15	-64.12	-20.44	22.44	40.00	-17.56
89.07	Max Peak	Н	250	212	-62.06	-20.94	24.00	43.52	-19.52
167.11	Max Peak	Н	100	76	-63.60	-17.76	25.64	43.52	-17.88
419.84	Max Peak	V	100	246	-77.76	-8.70	20.54	46.02	-25.48
945.20	Max Peak	Н	100	246	-79.49	0.32	27.83	46.02	-18.19

Table 7-39. Radiated Spurious Emissions below 1GHz CDD Ch.6 (RU26), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
34.90	Max Peak	V	100	310	-65.25	-14.56	27.19	40.00	-12.81
88.64	Max Peak	Н	250	188	-62.77	-21.00	23.23	43.52	-20.29
167.26	Max Peak	Н	100	81	-62.61	-17.75	26.64	43.52	-16.89
284.67	Max Peak	Н	100	40	-71.99	-14.44	20.57	46.02	-25.45
541.19	Max Peak	V	100	152	-78.82	-4.70	23.48	46.02	-22.55
947.14	Max Peak	Н	250	160	-79.21	0.33	28.12	46.02	-17.90

Table 7-40. Radiated Spurious Emissions below 1GHz CDD Ch.6 (RU242), with AC/DC Adapter

FCC ID: BCGA2069	PCTEST	MEASUREMENT REPORT (CERTIFICATION)		
Test Report S/N:	Test Dates:	EUT Type:	Dogo 125 of 126	
1C1912170054-07.BCG	12/10/2019 - 02/24/2020	Tablet Device	Page 135 of 136	



CONCLUSION

The data collected relate only the item(s) tested and show that the Apple Tablet Device FCC ID: BCGA2069 is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA2069	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogg 426 of 426
1C1912170054-07.BCG	12/10/2019 - 02/24/2020	Tablet Device	Page 136 of 136
© 2020 PCTEST			V 9.5 12/16/2019